

	1	2	3	4	5	6	7	8
			Rev. No					
A								
B								
C								
D								
E								
F								
G								
H								
I								
J								
K								
L								

Technical Description

1. Use FILM provided by SAMSUNG for letter and contents
2. Background color is WHITE , letter color is BLACK (reverse for SAMSUNG LOGO)
3. Put glassine paper on the back side after the adhesive.
4. No blur and spread for letter
5. Proceed with manufacturing process after the approval of R&D Group
6. The spec. of product must be based on approved limit samples.
7. Stock on as a ROLL
8. Follow drawing instruction above for CE or WEEE mark
9. Unify material and color as one color (blue) for glassine paper




24.0^{+0.1}_{-0.1}

9.0^{+0.1}_{-0.1}

12.0^{+0.1}_{-0.1}

5-R1


28.0^{+0.1}_{-0.1}

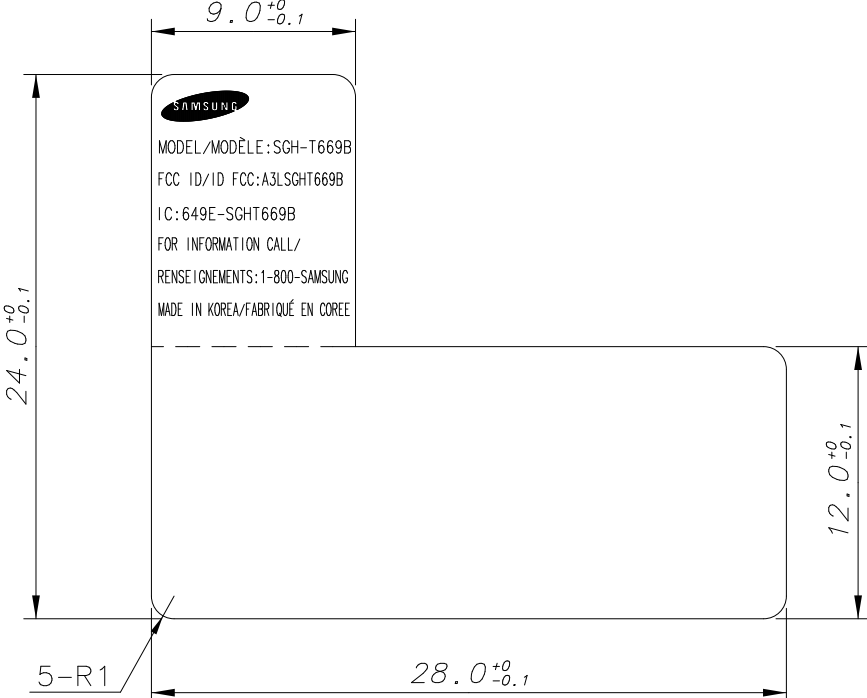

2.0


2.0

3.0

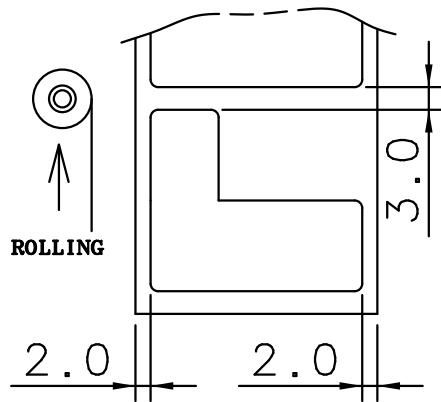

MAT.	White polypropylene 80μ	FIN.	Semitransparency OPP Lamination + UVP Coating		
TITLE	SGH-T669B LABEL(R)-MAIN-CANADA-BMC				
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION
TOLERANCE	+0.0 -0.1	jukyun Kim	kyeonghwan jo	junesop kim	
SCALE	N / S				
Manufacture	HANSUNG P&I	10-04-06	10-04-06	10-04-06	SHEET NO 1/1
		Doc. CODE	GH68-00000A		

The label is placed inside the battery compartment

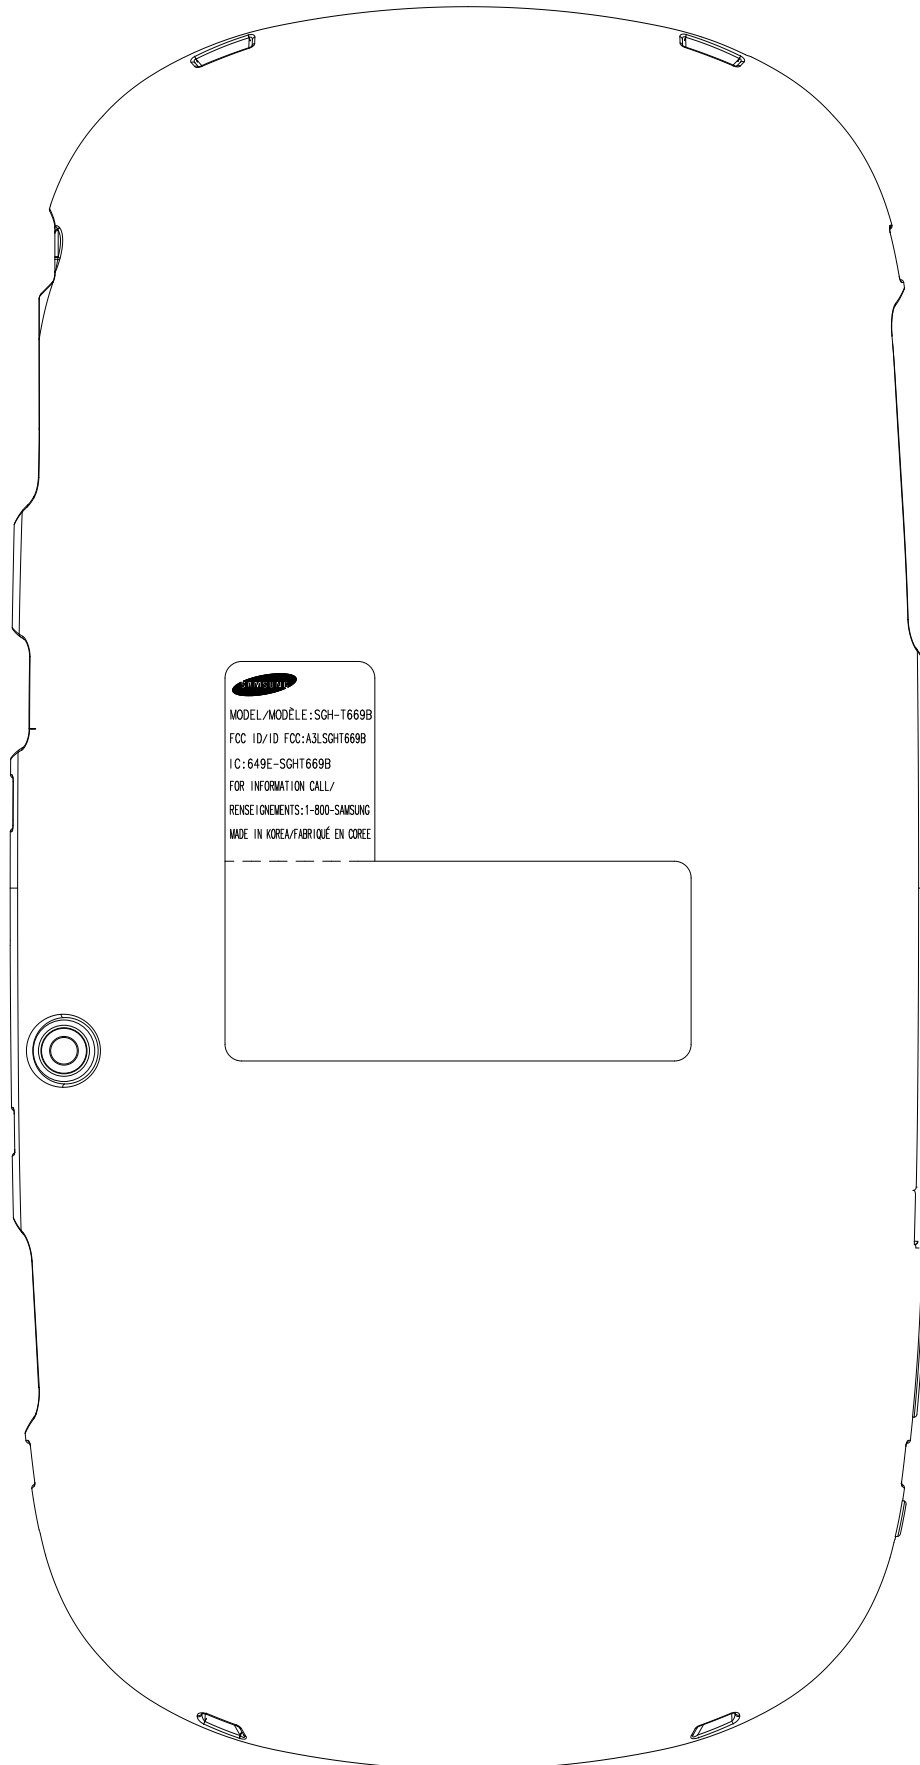

Note: The FCC ID label shown will be readily visible at the time of purchase.