



MEASUREMENT REPORT

FCC PART 15.407 / IC RSS-210 802.11a/n (UNII)

Applicant Name:

Samsung Electronics Co., Ltd.
416 Maetan 3-Dong, Yeongtong-gu
Suwon-si, Gyeonggi-do
443-742, Republic of Korea

Date of Testing:

Feb. 22 - Mar. 11, 2012

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

OY1204300613.A3L

FCC ID:	A3LSGHT999
IC CERTIFICATION NO.:	649E-SGHT999
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:

Certification

Model(s):

SGH-T999, SGH-T999V

EUT Type:

Portable Handset

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15.407

IC Specification(s):

RSS-210 Issue 8

Test Procedure(s):

ANSI C63.4-2003, KDB 789033

Mode	UNII Band	BW	Tx Frequency (MHz)	Conducted Power	
				Max. Power (mW)	Max. Power (dBm)
802.11a	1	20MHz	5180 - 5240	22.182	13.46
	2	20MHz	5260 - 5320	22.699	13.56
	3	20MHz	5500 - 5700	23.067	13.63
802.11n	1	20MHz	5180 - 5240	21.928	13.41
	2	20MHz	5260 - 5320	22.491	13.52
	3	20MHz	5500 - 5700	22.646	13.55
802.11n	1	40MHz	5190 - 5230	19.409	12.88
	2	40MHz	5270 - 5310	22.491	13.52
	3	40MHz	5510 - 5670	22.646	13.55

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: OY1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 1 of 95

T A B L E O F C O N T E N T S

FCC PART 15.407 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 PCTEST TEST LOCATION	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.5 LABELING REQUIREMENTS	5
3.0 DESCRIPTION OF TEST	6
3.1 EVALUATION PROCEDURE	6
3.2 AC LINE CONDUCTED EMISSIONS	6
3.3 RADIATED EMISSIONS	7
4.0 ANTENNA REQUIREMENTS	8
5.0 TEST EQUIPMENT CALIBRATION DATA	9
6.0 TEST RESULTS	10
6.1 SUMMARY	10
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N	11
6.3 UNII OUTPUT POWER MEASUREMENT – 802.11A/N	26
6.4 PEAK POWER SPECTRAL DENSITY – 802.11A/N	28
6.5 PEAK EXCURSION RATIO – 802.11A/N	43
6.6 FREQUENCY STABILITY	58
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS	61
6.8 RADIATED BAND EDGE MEASUREMENTS	71
6.9 LINE-CONDUCTED TEST DATA	86
7.0 CONCLUSION	95

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 2 of 95



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 416 Maetan 3-Dong, Yeongtong-gu
Suwon-si, Gyeonggi-do, 443-742, Republic of Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.407

IC SPECIFICATION(S): RSS-210 Issue 8

MODEL NAME: SGH-T999, SGH-T999V

FCC ID: A3LSGHT999

Test Device Serial No.: BT/WIFI ☐ Production ☒ Pre-Production ☐ Engineering

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

DATE(S) OF TEST: Feb. 22 - Mar. 11, 2012

TEST REPORT S/N: 0Y1204300613.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 3 of 95

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 10, 2012.

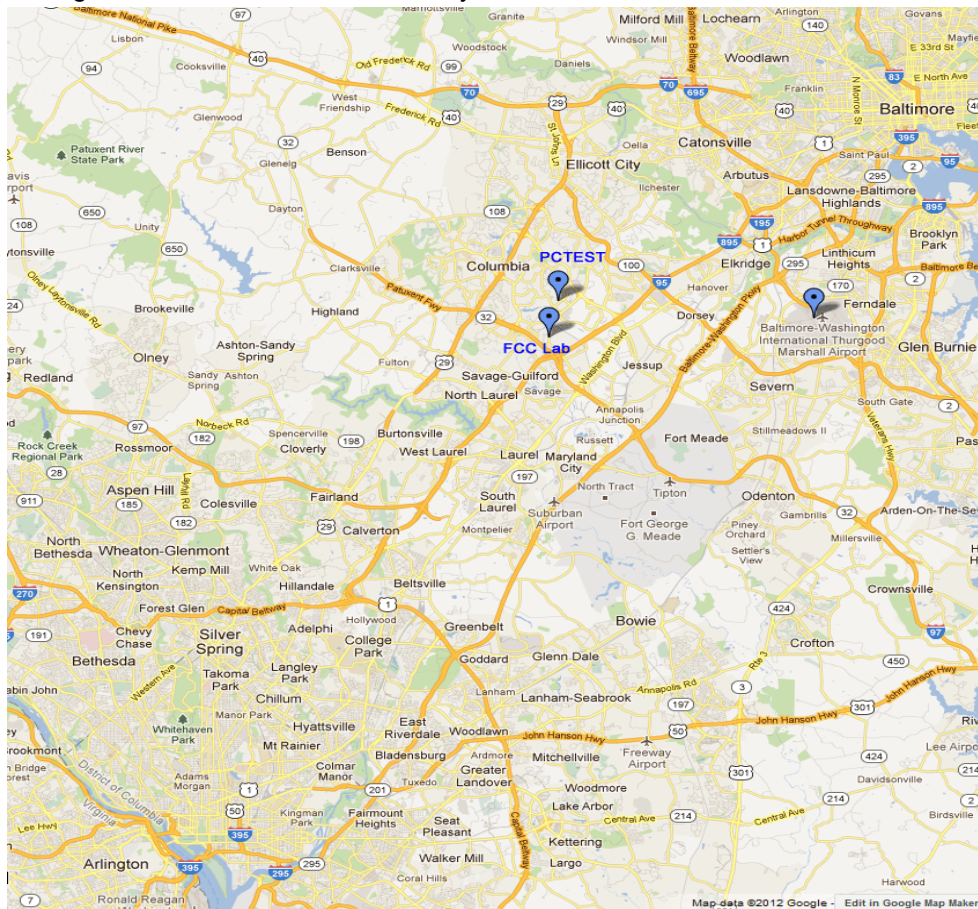


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 4 of 95

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSGHT999**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, 802.11a/b/g/n WLAN, Bluetooth (EDR, LE), NFC

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSGHT999 was tested per the guidance of ANSI C63.4-2003 and KDB 789033. See Section 3 this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 5 of 95

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003), and the guidance provided in KDB 789033 were used in the measurement of **Samsung Portable Handset FCC ID: A3LSGHT999**.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions




Figure 3-1. Shielded Enclosure Line-Conducted Test Facility

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½".




Figure 3-2. Line Conducted Emission Test Set-Up

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.




Figure 3-3. Wooden Table & Bonded LISNs




Figure 3-4. LISN Schematic Diagram

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission emission. Each emission was maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz bandwidth for final measurements. Each emission reported was calibrated using a signal generator.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 6 of 95

3.3 Radiated Emissions



Figure 3-5. 3-Meter Test Site



Figure 3-6. Dimensions of Outdoor Test Site



Figure 3-7. Turntable and System Setup



Figure 3-8. Normalized Site Attenuation Curves (H&V)

The radiated test facilities consisted of an indoor semi-anechoic chamber used for exploratory measurements and an open area test site (OATS) used for final measurements. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies higher than the upper frequency range of the broadband antenna used for testing, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used.

Exploratory measurements were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of a 0.8 meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth, and receive antenna height was noted for each frequency found. To record the exploratory measurements, the analyzers' detector function was set to peak mode and the bandwidth was set to 100kHz.

Final measurements were made on the OATS at 3 meter test range using calibrated, linearly polarized broadband or horn antennas (see Figure 3-5). The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment (see Figure 3-6). The test set-up was again placed on top of the same a 0.8 meter high non-metallic 1 x 1.5 meter table on the OATS as used for exploratory measurements in the indoor chamber. The test set-up was re-configured to the same setup that was previously determined through exploratory measurements to have produced the worst case emissions. The spectrum analyzer was set to the frequencies found to have caused the highest radiated disturbances with respect to the limit during preliminary radiated measurements. The turntable containing the system was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was re-maximized by varying: the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment, powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable, and changing the polarity of the receive antenna, whichever produced the worst-case emissions. To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. For average measurements above 1GHz, the analyzer was set to peak detector with a reduced VBW setting (RBW = 1MHz, VBW = 10Hz). Each emission reported was calibrated using a signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 7 of 95

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Samsung Portable Handset FCC ID: A3LSGHT999** unit complies with the requirement of §15.203.

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	116	5580
:	:	:	:	:	:
48	5240	64	5320	140	5700

Table 4-1. 802.11a Frequency / Channel Operations

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	116	5580
:	:	:	:	:	:
48	5240	64	5320	140	5700

Table 4-2. 802.11n Frequency / Channel Operations

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510
:	:	:	:	:	:
:	:	:	:	110	5550
:	:	:	:	:	:
46	5230	62	5310	134	5700

Table 4-3. 802.11n Frequency / Channel Operations (40MHz BW)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 8 of 95

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/7/2011	Annual	6/7/2012	N/A
-	WL25-1	Conducted WLAN Cable Set (25GHz)	2/13/2012	Annual	2/13/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	40G-1R	40GHz Radiated Cable Set	2/23/2012	Annual	2/23/2013	N/A
-	WL40-1	Conducted WLAN Cable Set (40GHz)	2/24/2012	Annual	2/24/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	2443A01900
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Annual	7/22/2012	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/31/2011	Annual	5/31/2012	135427
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Mini-Circuits	VHF-3100+	High Pass Filter	2/7/2012	Annual	2/7/2013	31144
Mini-Circuits	VHF-8400+	3.4GHz - 9.9GHz High Pass Filter	2/28/2012	Annual	2/28/2013	31048
Rohde & Schwarz	RS-PR18	1-18 GHz Pre-Amplifier	6/9/2011	Annual	6/9/2012	100071
Rohde & Schwarz	RS-PR26	18-26.5 GHz Pre-Amplifier	6/9/2011	Annual	6/9/2012	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 5-1. Annual Test Equipment Calibration Schedule

Note:

All equipments, listed in the table above, were in Cal at the time of testing.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 9 of 95

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSGHT999
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
N/A	RSS-210 [A9.2]	26dB Bandwidth [FCC] Occupied Bandwidth [IC]	N/A	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2]	Maximum Conducted Output Power	$< 4 + 10\log_{10}(\text{BW})$ dBm (5150-5250MHz) [FCC] $< 10 + 10\log_{10}(\text{BW})$ dBm (5150-5250MHz) [IC] $< 11 + 10\log_{10}(\text{B})$ dBm (5250-5350MHz) $< 11 + 10\log_{10}(\text{B})$ dBm (5470 – 5725MHz)		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) [FCC] < 10 dBm/MHz (5150-5250) [IC] < 11 dBm/MHz (5250-5350) < 11 dBm/MHz (5470-5725)		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(g)	N/A	Frequency Stability	N/A		PASS	Section 6.6
15.407(b)(1), (2),(3)	RSS-210 [A9.2]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz)	RADIATED	PASS	Section 6.7
15.407(h)	RSS-210 [A9.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.205, 5.407(b)(1), (5), (6)	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.8
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	$< \text{FCC 15.207 limits or}$ $< \text{RSS-Gen table 2 limits}$	LINE CONDUCTED	PASS	Section 6.10
RECEIVER MODE (RX) / DIGITAL EMISSIONS						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	$< \text{FCC 15.107 limits or}$ $< \text{RSS-Gen table 2 limits}$	LINE CONDUCTED	PASS	Part 15B Test Report
15.109	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	$< \text{FCC 15.109 limits or}$ $< \text{RSS-210 table 3 limits}$	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B Test Report

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) Conducted and Radiated data reported herein were taken from the device FCC ID: A3LSGHI747 , which is electrically identical (no hardware changed) to the device FCC ID: A3LSGHT999.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 10 of 95	

6.2 26dB Bandwidth Measurement – 802.11a/n

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	20.000
	5200	40	a	6	20.000
	5240	48	a	6	20.000
	5180	36	n	6.5/7.2 (MCS0)	20.000
	5200	40	n	6.5/7.2 (MCS0)	20.000
	5240	48	n	6.5/7.2 (MCS0)	20.000
Band II	5260	52	a	6	20.000
	5280	56	a	6	20.000
	5320	64	a	6	20.000
	5260	52	n	6.5/7.2 (MCS0)	20.000
	5280	56	n	6.5/7.2 (MCS0)	20.000
	5320	64	n	6.5/7.2 (MCS0)	20.000
Band III	5500	100	a	6	20.000
	5580	116	a	6	20.000
	5700	140	a	6	20.000
	5500	100	n	6.5/7.2 (MCS0)	20.000
	5580	116	n	6.5/7.2 (MCS0)	20.000
	5700	140	n	6.5/7.2 (MCS0)	20.000

Table 6-2. Conducted Bandwidth Measurements (20MHz BW)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 11 of 95

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5190	38	n	6.5/7.2 (MCS0)	40.000
	5230	46	n	6.5/7.2 (MCS0)	40.000
Band II	5270	54	n	6.5/7.2 (MCS0)	40.000
	5310	62	n	6.5/7.2 (MCS0)	40.000
Band III	5510	102	n	6.5/7.2 (MCS0)	40.000
	5550	110	n	6.5/7.2 (MCS0)	39.120
	5670	134	n	6.5/7.2 (MCS0)	40.000

Table 6-3. Conducted Bandwidth Measurements (40MHz BW)



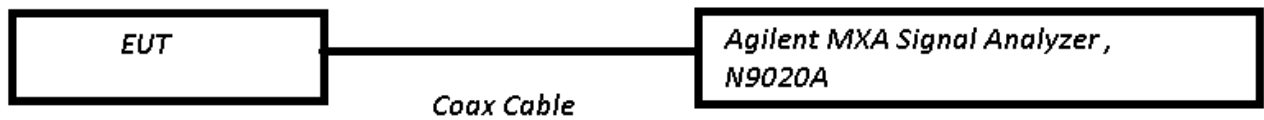


Figure 6-1. Test Instrument & Measurement Setup

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 12 of 95

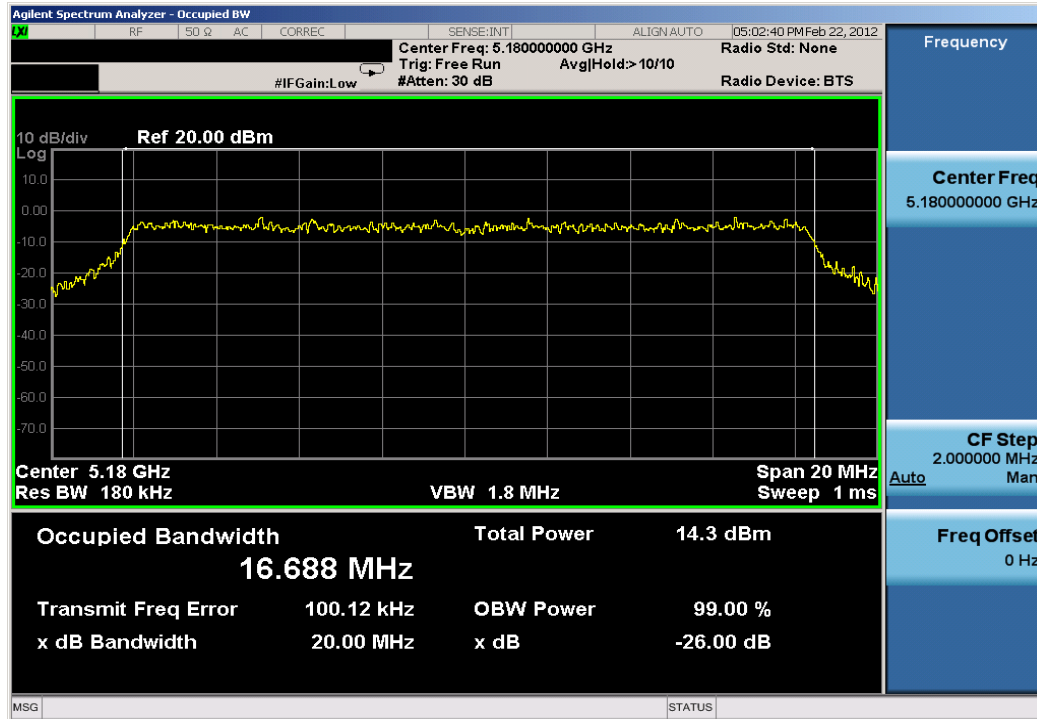


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

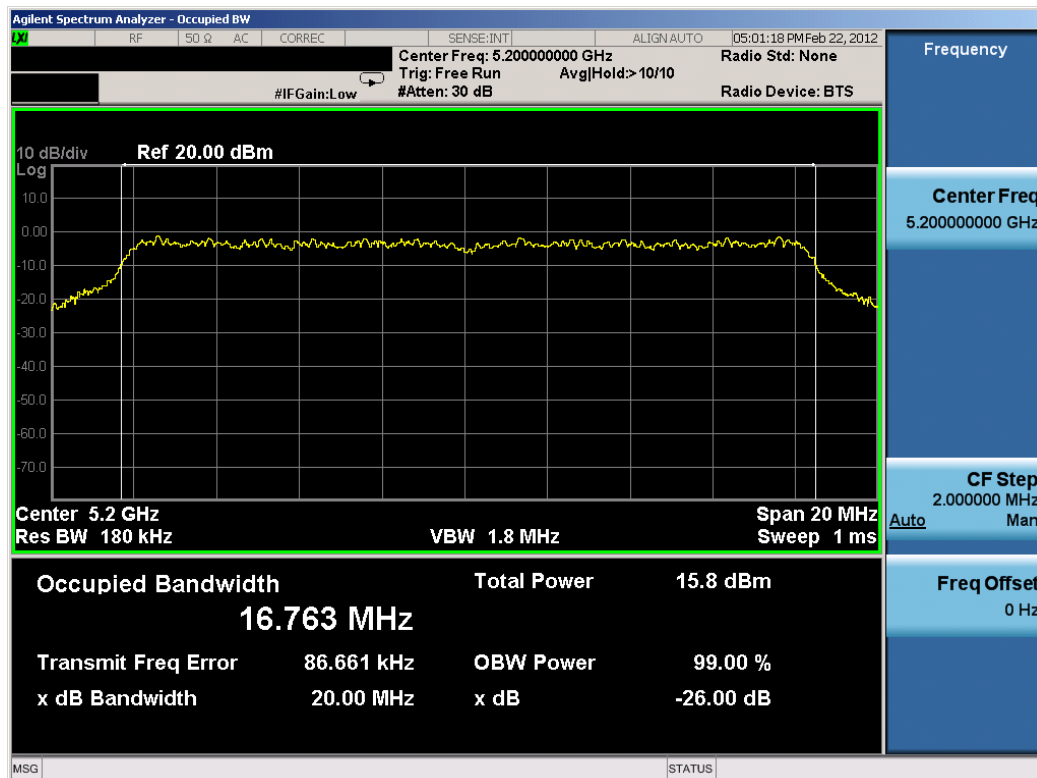


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 13 of 95

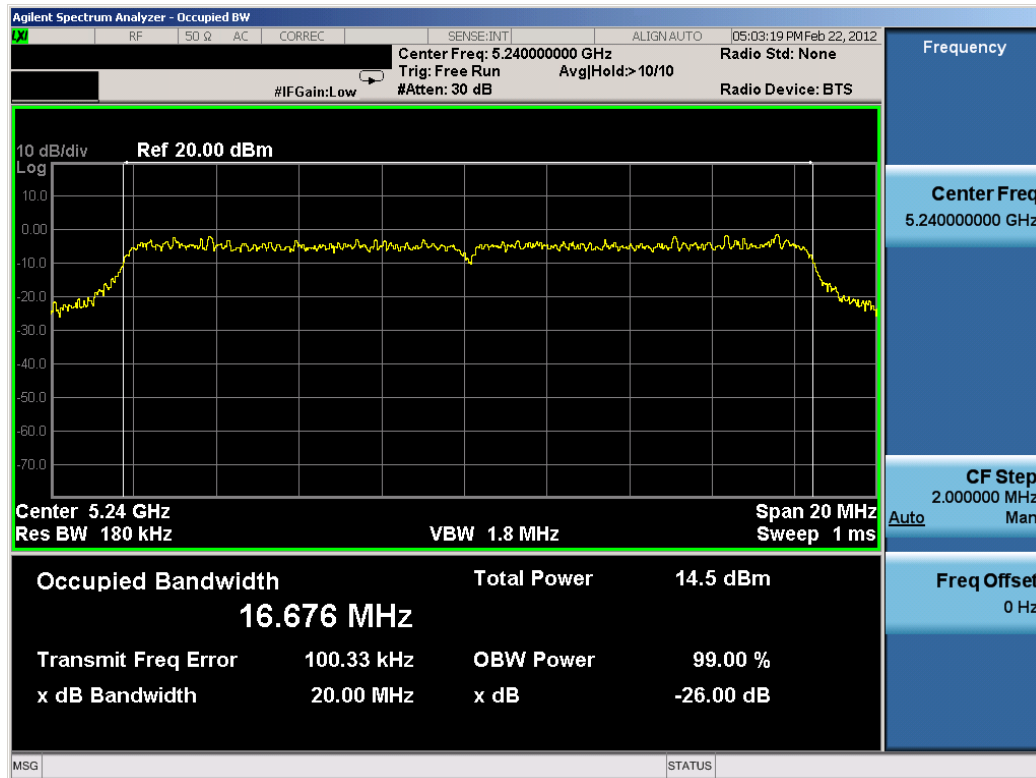


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

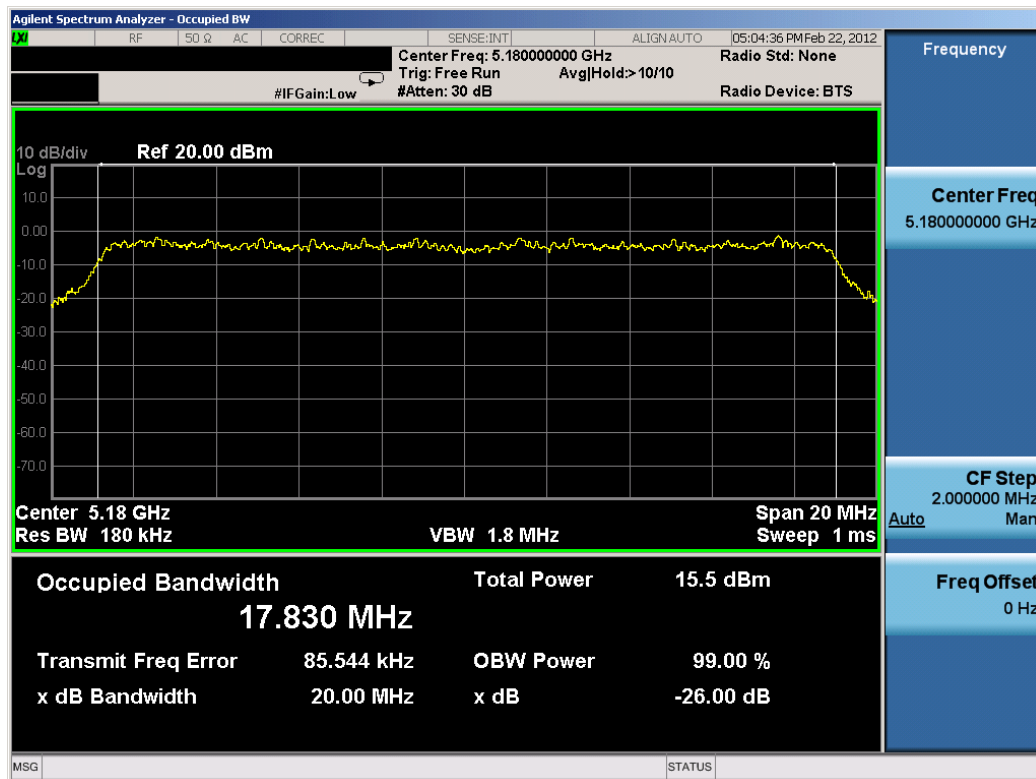


Plot 6-4. 26dB Bandwidth Plot (802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 14 of 95

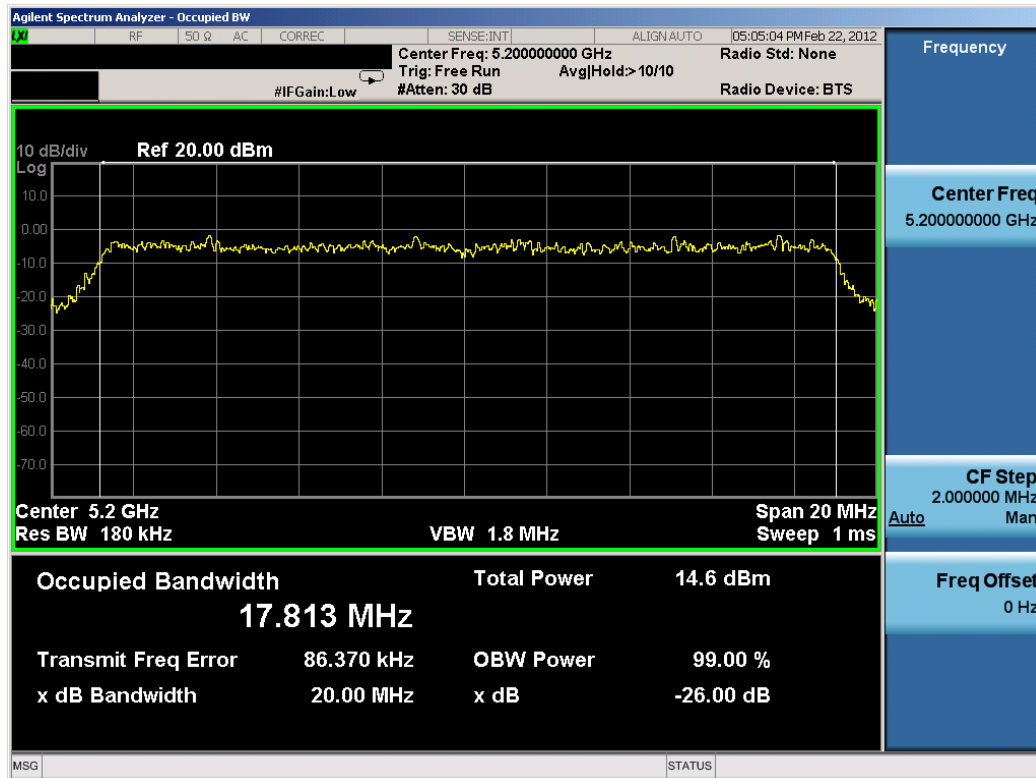


Plot 6-5. 26dB Bandwidth Plot (802.11n (UNII Band 1) – Ch. 40)

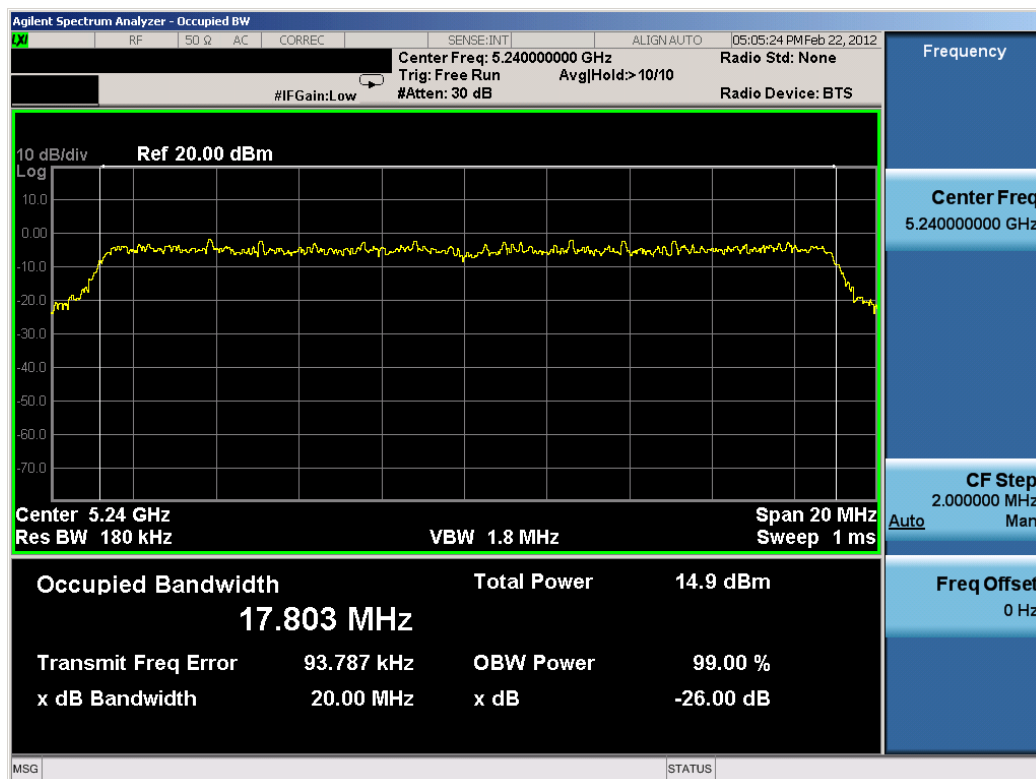


Plot 6-6. 26dB Bandwidth Plot (802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 15 of 95

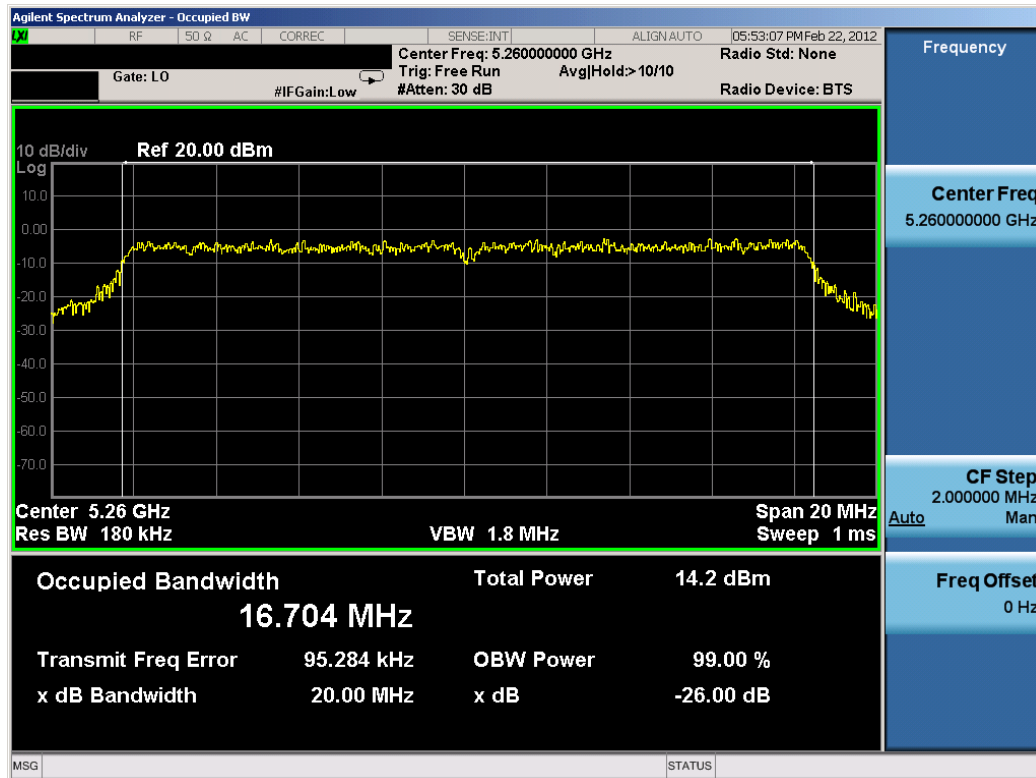


Plot 6-7. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 52)

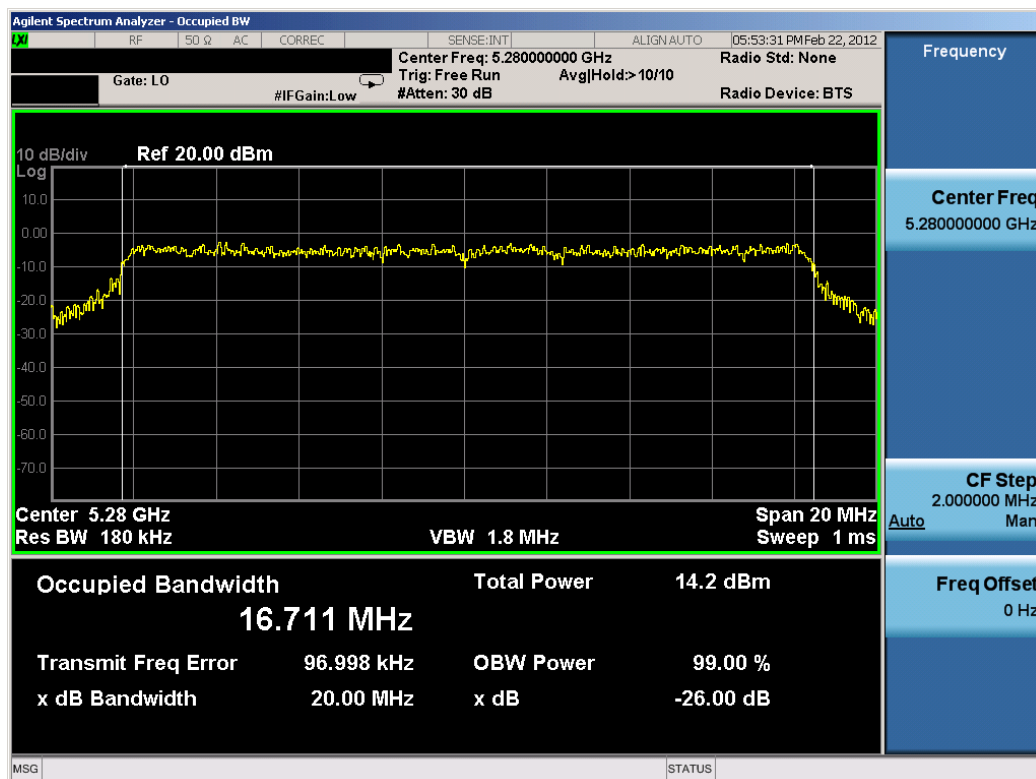


Plot 6-8. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 16 of 95

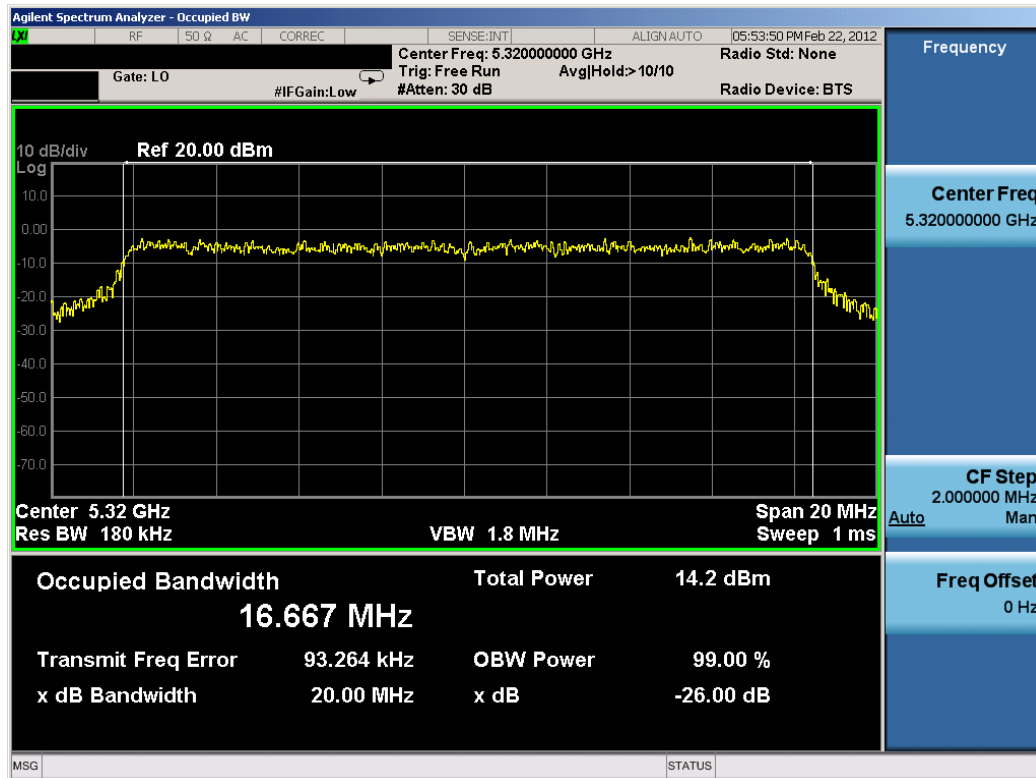


Plot 6-9. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 64)

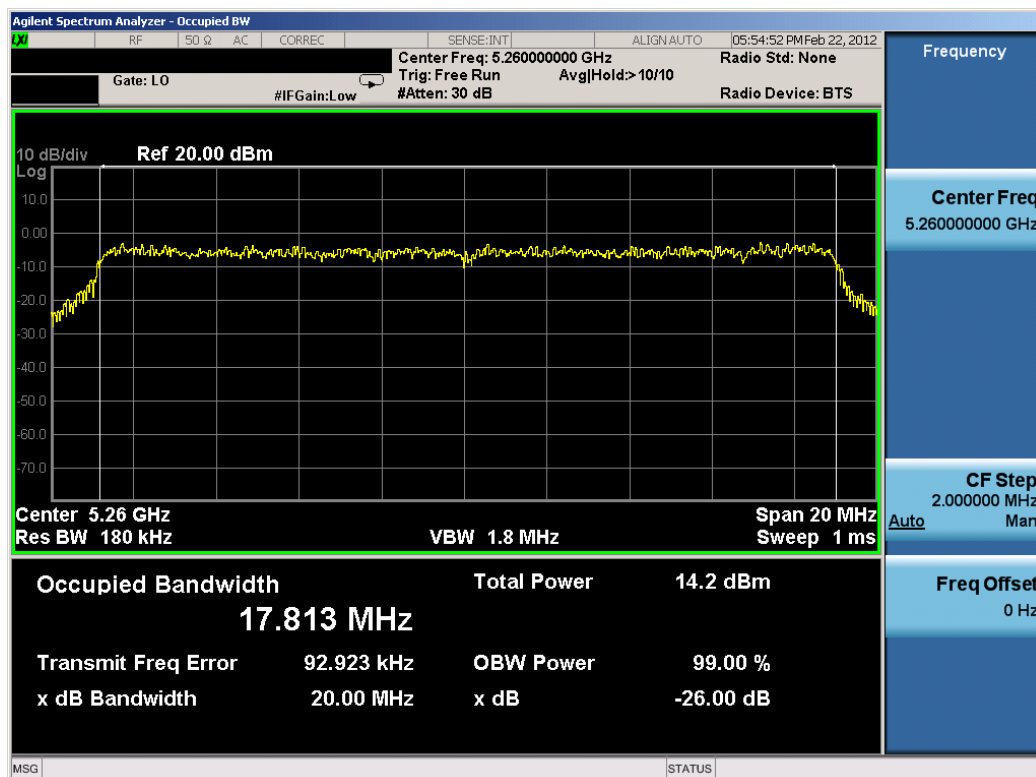


Plot 6-10. 26dB Bandwidth Plot (802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 17 of 95

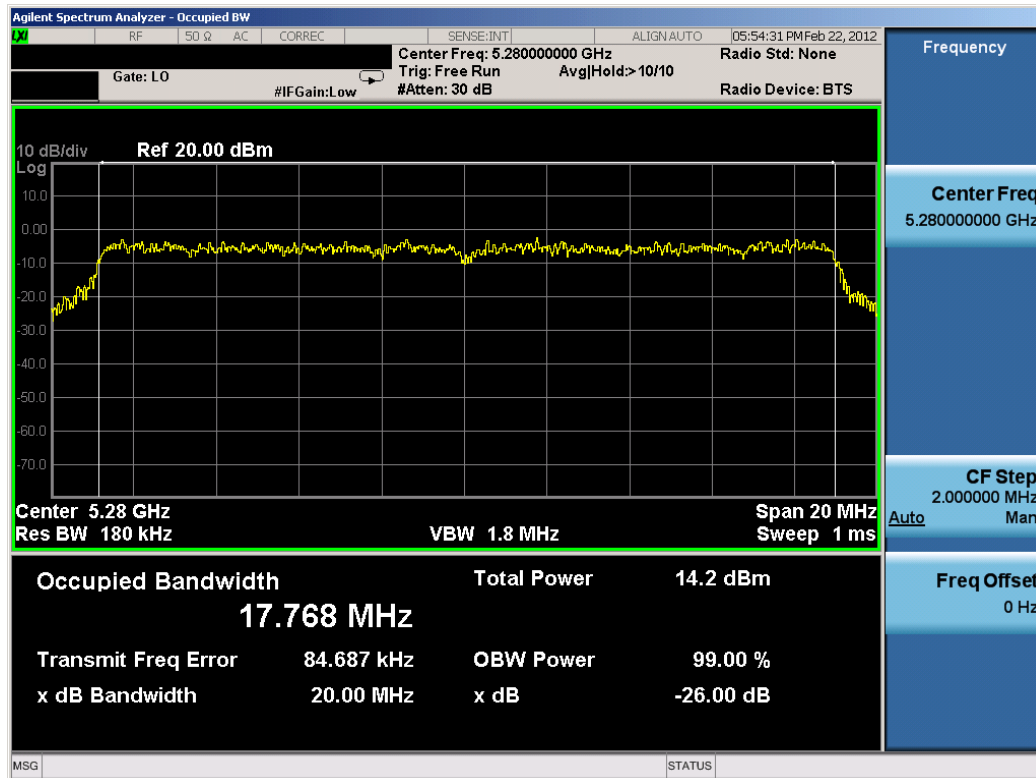


Plot 6-11. 26dB Bandwidth Plot (802.11n (UNII Band 2) – Ch. 56)

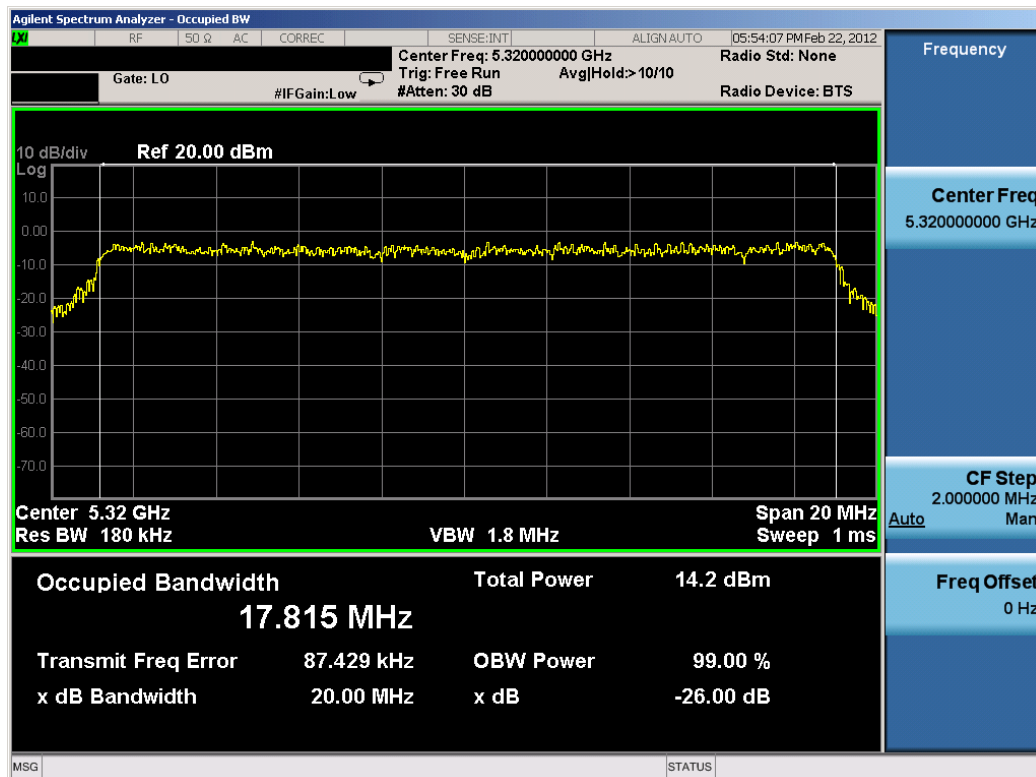


Plot 6-12. 26dB Bandwidth Plot (802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 18 of 95

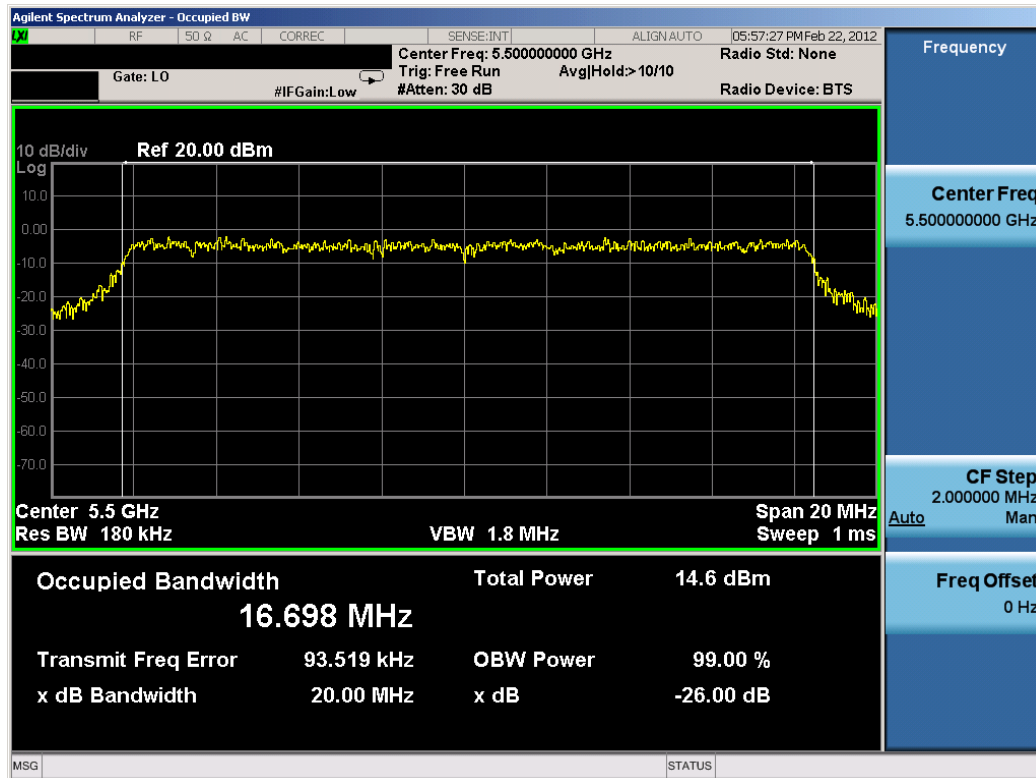


Plot 6-13. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 100)

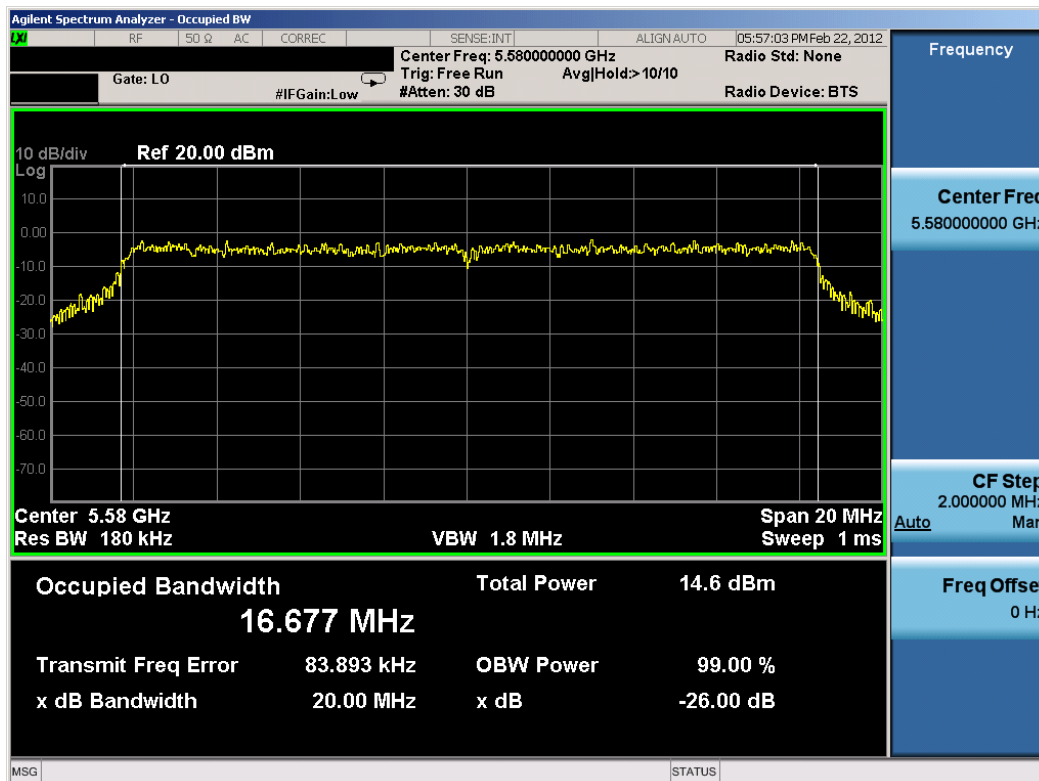


Plot 6-14. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 19 of 95

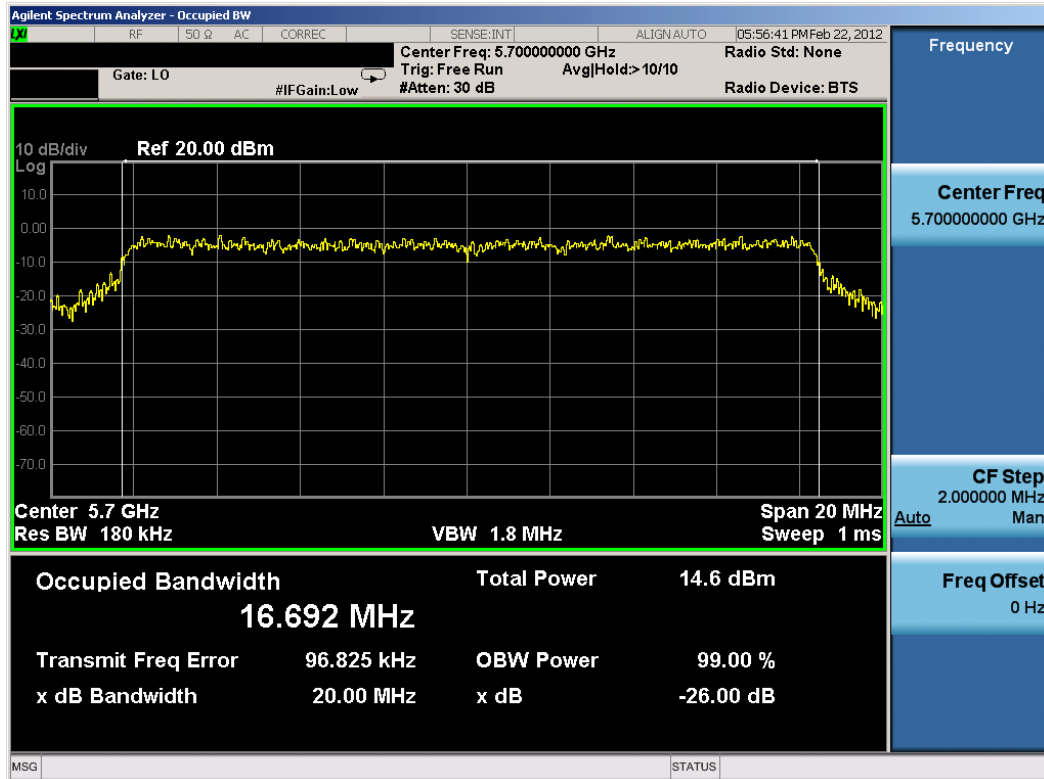


Plot 6-15. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 140)

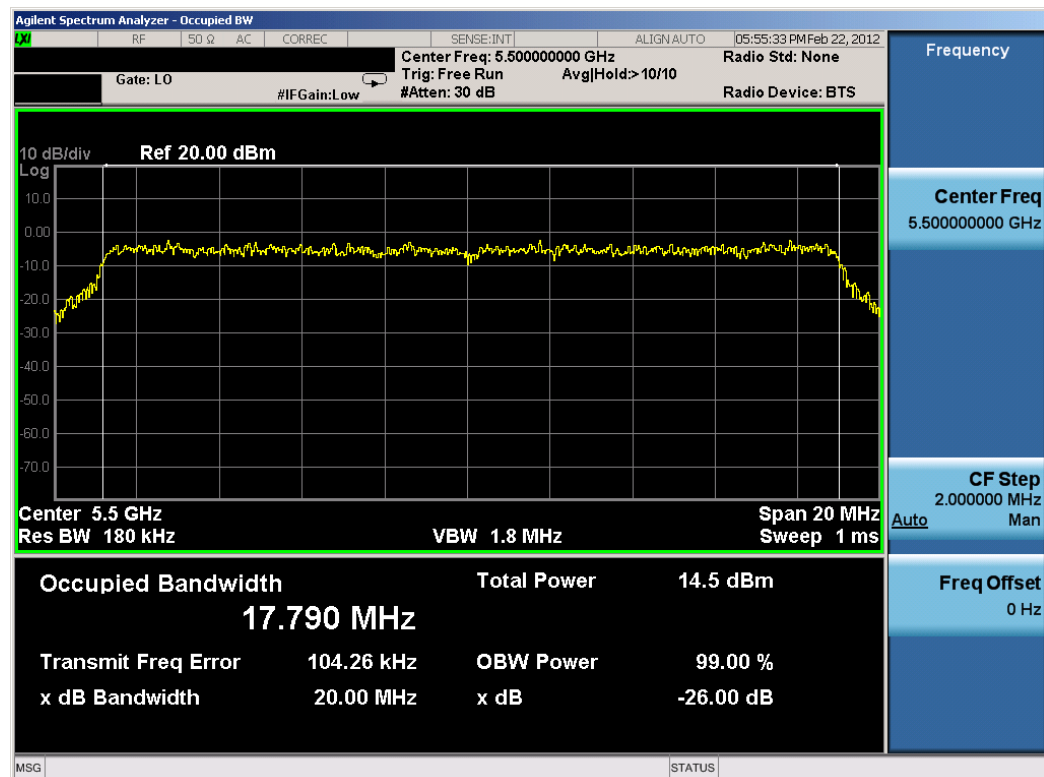


Plot 6-16. 26dB Bandwidth Plot (802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 20 of 95

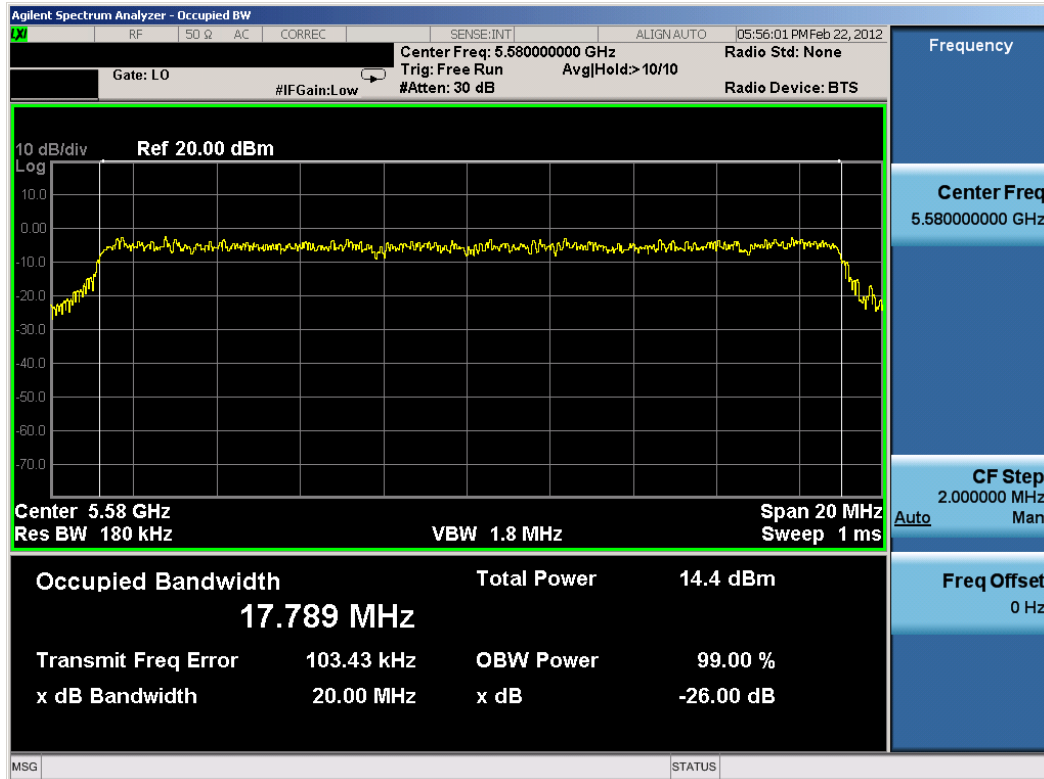


Plot 6-17. 26dB Bandwidth Plot (802.11n (UNII Band 3) – Ch. 116)

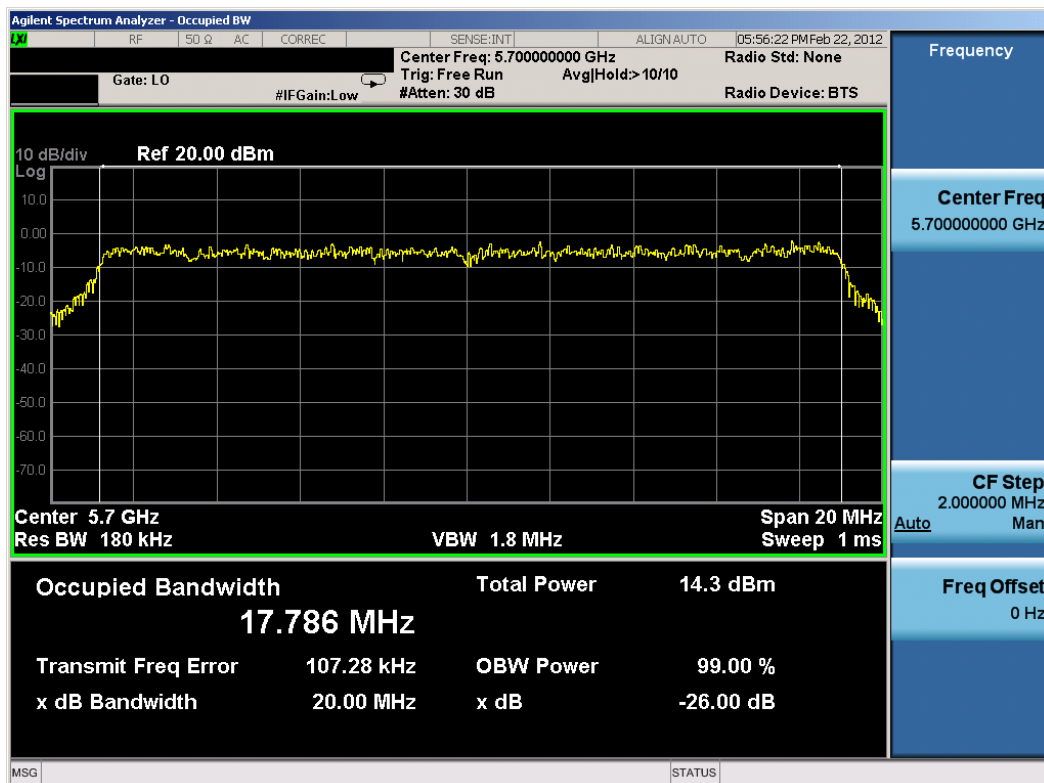


Plot 6-18. 26dB Bandwidth Plot (802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 21 of 95

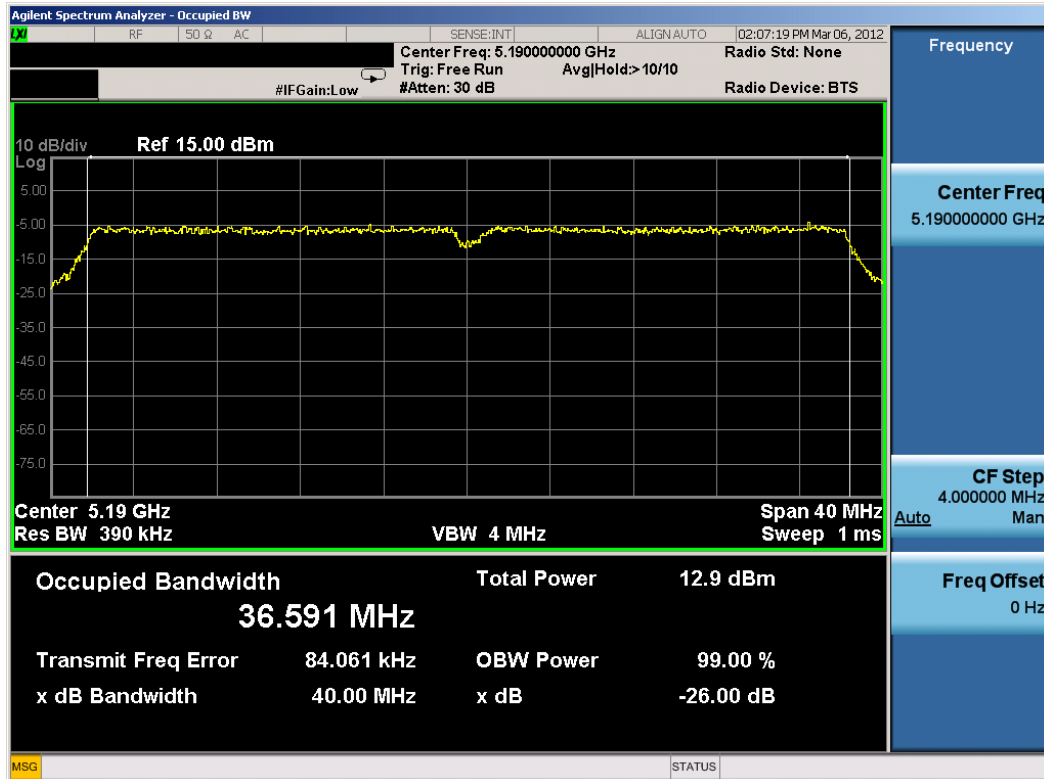


Plot 6-19. 26dB Bandwidth Plot (802.11n (UNII Band 1 – 40MHz BW) – Ch. 38)

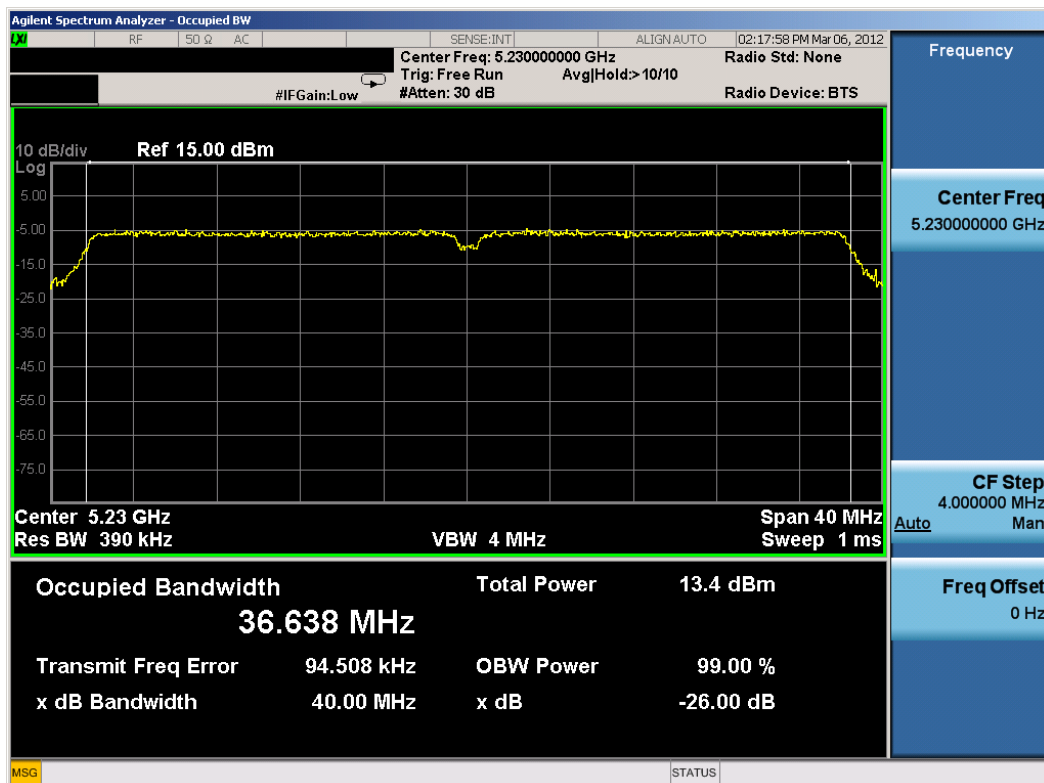


Plot 6-20. 26dB Bandwidth Plot (802.11n (UNII Band 1 – 40MHz BW) – Ch. 46)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 22 of 95

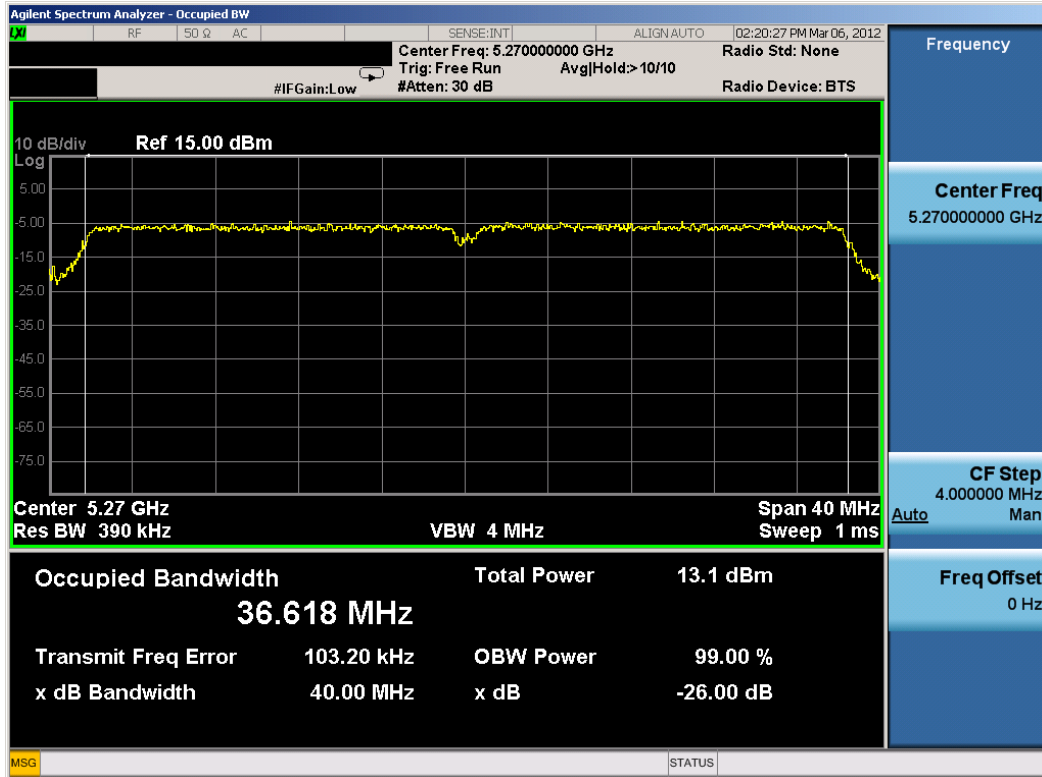


Plot 6-21. 26dB Bandwidth Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 54)

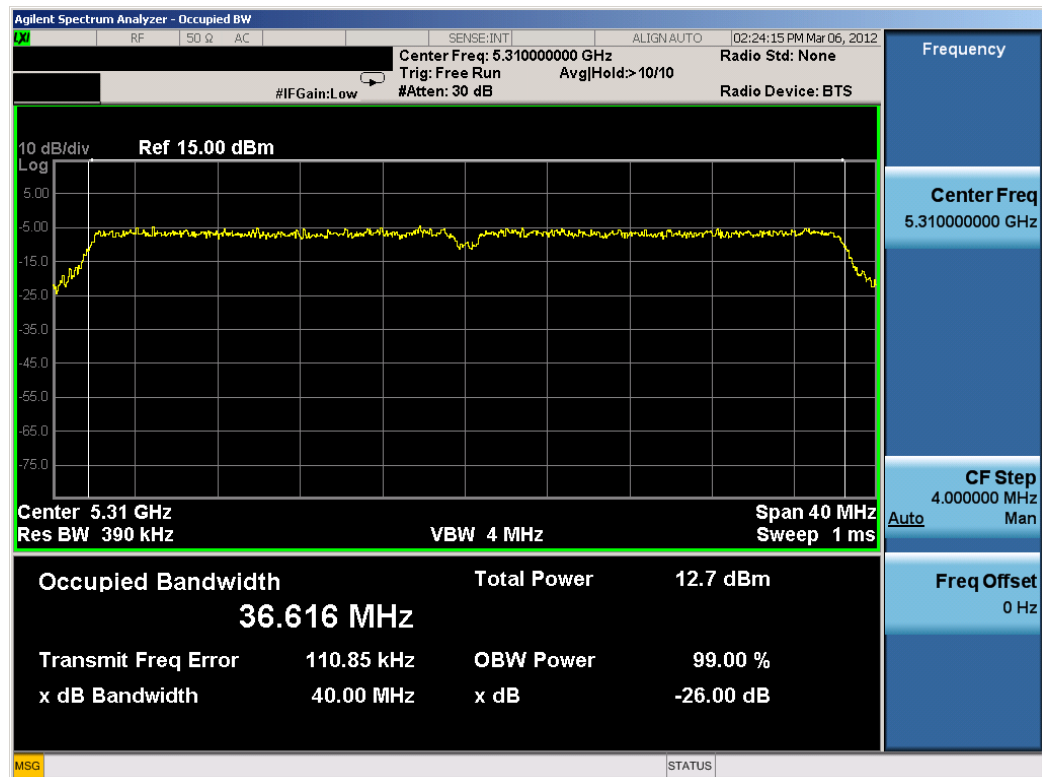


Plot 6-22. 26dB Bandwidth Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 62)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 23 of 95

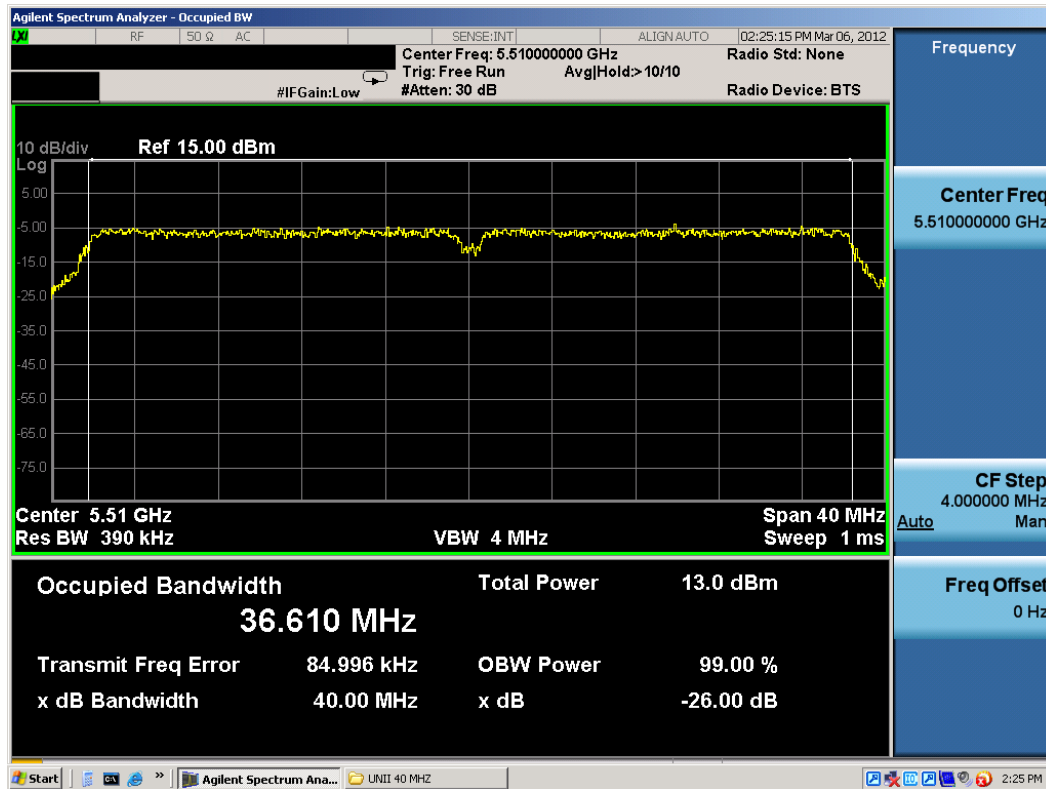


Plot 6-23. 26dB Bandwidth Plot (802.11n (UNII Band 3 – 40MHz BW) – Ch. 102)

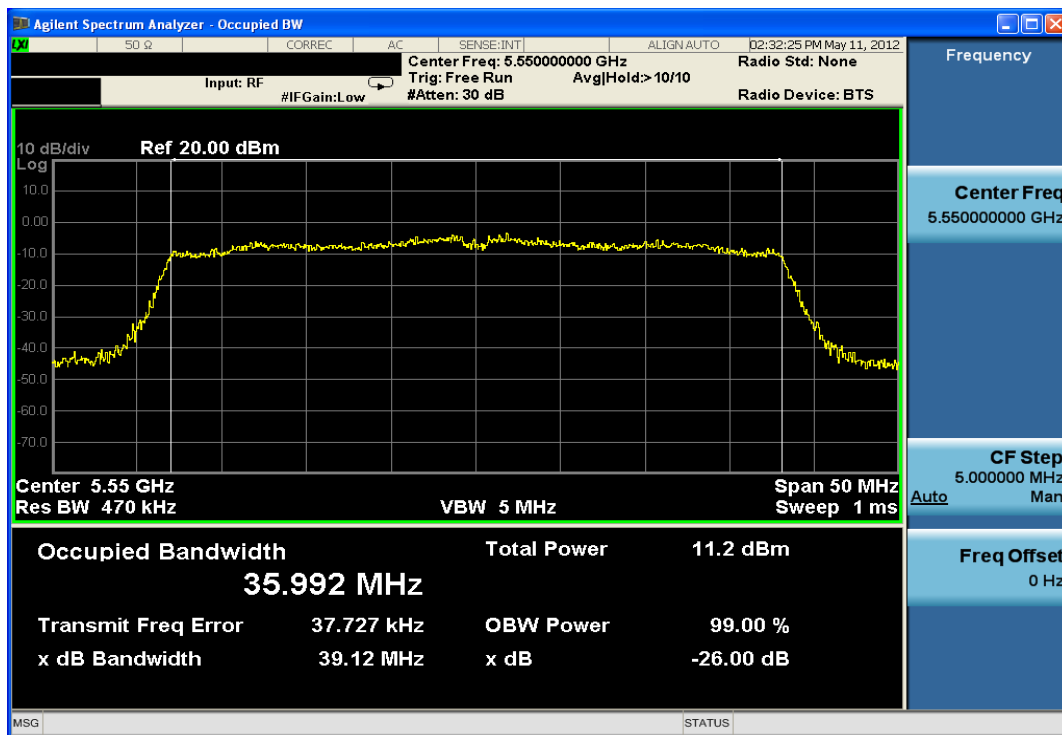

Plot 6-24. 26dB Bandwidth Plot (802.11n (UNII Band 3 – 40MHz BW) – Ch. 110)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 24 of 95

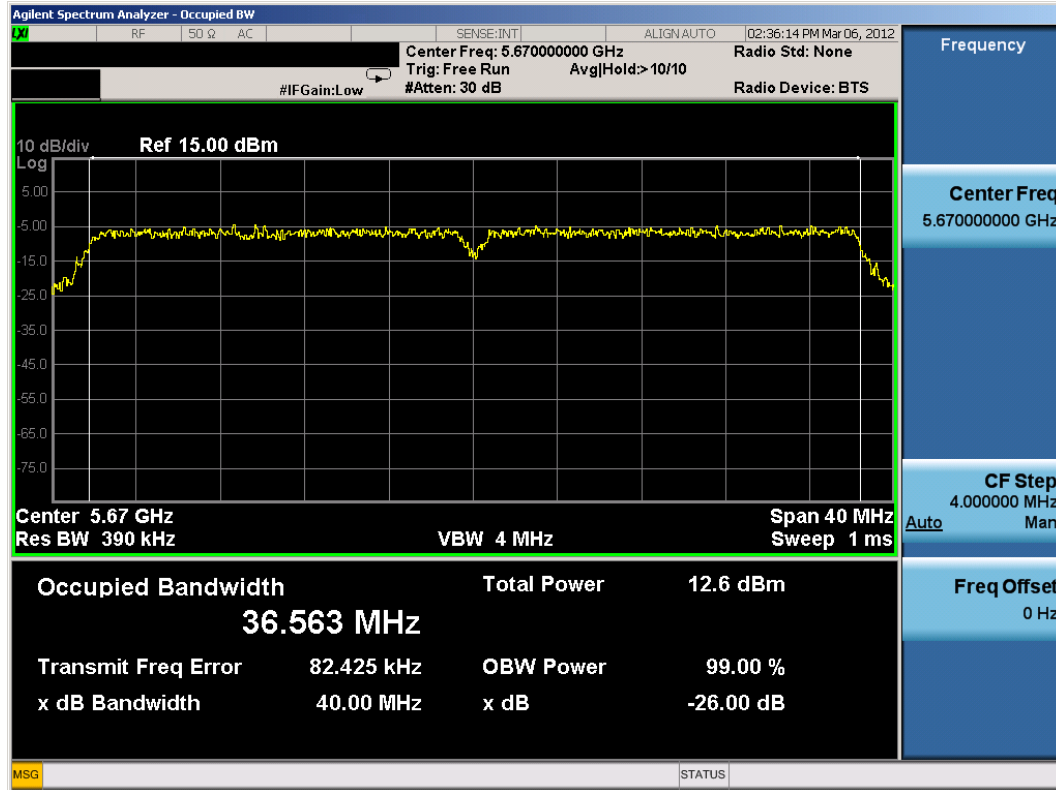

Plot 6-25. 26dB Bandwidth Plot (802.11n (UNII Band 3 – 40MHz BW) – Ch. 134)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 25 of 95

6.3 UNII Output Power Measurement – 802.11a/n

§15.407 (a)(1): RSS-210 [A9.2]

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made using a broadband average power meter while the EUT is operating continuously at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and $4 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 4 \text{ dBm} + 10\log_{10}(20) = 17.01\text{dBm}$.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20) = 24.01\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20) = 24.01\text{dBm}$.

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5180	36	AVG	13.01	13.24	13.37	13.12	13.25	13.15	13.27	13.11
802.11a	5200	40	AVG	13.11	13.34	13.35	13.18	13.37	13.10	13.26	13.24
802.11a	5220	44	AVG	13.11	13.40	13.36	13.27	13.33	13.11	13.31	13.23
802.11a	5240	48	AVG	13.22	13.41	13.46	13.17	13.37	13.08	13.34	13.40
802.11a	5260	52	AVG	13.22	13.44	13.56	13.24	13.40	13.23	13.40	13.44
802.11a	5280	56	AVG	13.30	13.40	13.47	13.31	13.51	13.32	13.40	13.51
802.11a	5300	60	AVG	13.31	13.42	13.50	13.30	13.41	13.33	13.46	13.52
802.11a	5320	64	AVG	13.34	13.52	13.55	13.31	13.50	13.34	13.51	13.45
802.11a	5500	100	AVG	13.13	13.45	13.51	13.31	13.21	13.37	13.29	13.26
802.11a	5520	104	AVG	13.29	13.43	13.46	13.25	13.52	13.27	13.37	13.41
802.11a	5540	108	AVG	13.14	13.34	13.52	13.33	13.36	13.40	13.33	13.39
802.11a	5560	112	AVG	13.41	13.51	13.55	13.32	13.37	13.49	13.41	13.33
802.11a	5580	116	AVG	13.42	13.58	13.63	13.35	13.49	13.54	13.47	13.54
802.11a	5660	132	AVG	13.54	13.62	13.58	13.11	13.04	13.09	13.11	13.12
802.11a	5680	136	AVG	12.94	13.25	13.21	13.02	13.20	13.22	13.31	13.31
802.11a	5700	140	AVG	13.23	13.24	13.40	12.94	13.26	13.20	13.33	13.14

Table 6-4. UNII (802.11a) Maximum Conducted Output Power (20MHz BW)

Mode	Freq [MHz]	Channel	Detector	802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5180	36	AVG	12.95	12.92	12.83	12.86	13.05	12.82	13.15	13.00
802.11n	5200	40	AVG	12.82	12.94	12.79	12.91	13.00	12.75	12.91	12.94
802.11n	5220	44	AVG	12.87	12.83	12.77	12.81	13.01	12.82	13.00	12.97
802.11n	5240	48	AVG	12.92	13.17	13.01	13.04	13.41	13.17	13.33	13.32
802.11n	5260	52	AVG	13.22	13.20	13.04	13.27	13.34	13.22	13.41	13.33
802.11n	5280	56	AVG	13.30	13.29	13.27	13.24	13.42	13.22	13.40	13.38
802.11n	5300	60	AVG	13.21	13.31	13.29	13.34	13.35	13.11	13.36	13.44
802.11n	5320	64	AVG	13.25	13.44	13.34	13.34	13.52	13.30	13.44	13.51
802.11n	5500	100	AVG	13.04	13.10	13.12	13.14	13.29	13.14	13.24	13.24
802.11n	5520	104	AVG	13.01	13.12	13.06	13.11	13.37	13.01	13.14	13.22
802.11n	5540	108	AVG	13.18	13.14	13.18	13.17	13.44	13.21	13.34	13.36
802.11n	5560	112	AVG	13.21	13.24	13.22	13.14	13.37	13.20	13.31	13.31
802.11n	5580	116	AVG	13.21	13.24	13.41	13.34	13.43	13.41	13.40	13.41
802.11n	5660	132	AVG	13.37	13.42	13.40	13.35	13.45	13.27	13.47	13.45
802.11n	5680	136	AVG	13.42	13.34	13.32	13.41	13.46	13.38	13.44	13.41
802.11n	5700	140	AVG	13.41	13.32	13.37	13.44	13.55	13.42	13.44	13.41

Table 6-5. UNII (802.11n) Maximum Conducted Output Power (20MHz BW)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 26 of 95

Mode	Freq [MHz]	Channel	Detector	802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5190	38	AVG	12.66	12.38	12.61	12.66	12.67	12.77	12.56	12.82
802.11n	5230	46	AVG	12.52	12.88	12.47	12.49	12.67	12.79	12.43	12.56
802.11n	5270	54	AVG	12.63	12.84	12.42	12.46	12.72	12.72	12.44	12.53
802.11n	5310	62	AVG	12.51	12.59	12.80	12.33	12.50	12.71	12.73	12.80
802.11n	5510	102	AVG	12.48	12.28	12.31	12.50	12.39	12.54	12.53	12.40
802.11n	5550	110	AVG	12.30	12.56	12.48	12.45	12.43	12.65	12.44	12.74
802.11n	5630	126	AVG	12.69	12.55	12.82	12.80	12.87	12.90	12.88	12.90
802.11n	5670	134	AVG	12.69	12.75	12.77	12.89	12.85	12.92	12.89	12.93

Table 6-6. UNII (802.11n) Maximum Conducted Output Power (40MHz BW)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 27 of 95

6.4 Peak Power Spectral Density – 802.11a/n

§15.407 (a)(1),(5) / RSS-210 [A9.2]

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. Method SA-1, as defined in KDB 789033, was used to measure the power spectral density.

The maximum permissible peak power spectral density is 4dBm/MHz in the 5.15GHz – 5.25GHz band and 11dBm/MHz in the 5.25GHz – 5.35 GHz and 5.47 – 5.725GHz bands.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	-1.44	4.0	-5.44
	5200	40	a	6	1.48	4.0	-2.52
	5240	48	a	6	-0.99	4.0	-4.99
	5180	36	n	6.5/7.2 (MCS0)	-0.94	4.0	-4.94
	5200	40	n	6.5/7.2 (MCS0)	-0.45	4.0	-4.45
	5240	48	n	6.5/7.2 (MCS0)	-0.12	4.0	-4.12
Band II	5260	52	a	6	-1.12	11.0	-12.12
	5280	56	a	6	-0.75	11.0	-11.75
	5320	64	a	6	-1.40	11.0	-12.40
	5260	52	n	6.5/7.2 (MCS0)	-0.84	11.0	-11.84
	5280	56	n	6.5/7.2 (MCS0)	-0.72	11.0	-11.72
	5320	64	n	6.5/7.2 (MCS0)	-0.71	11.0	-11.71
Band III	5500	100	a	6	-1.08	11.0	-12.08
	5580	116	a	6	-0.97	11.0	-11.97
	5700	140	a	6	-0.78	11.0	-11.78
	5500	100	n	6.5/7.2 (MCS0)	-1.12	11.0	-12.12
	5580	116	n	6.5/7.2 (MCS0)	-0.62	11.0	-11.62
	5700	140	n	6.5/7.2 (MCS0)	-0.61	11.0	-11.61

Table 6-7. Conducted Power Spectral Density Measurements (20MHz BW)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 28 of 95

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5190	38	n	6.5/7.2 (MCS0)	-8.200	4.0	-12.20
	5230	46	n	6.5/7.2 (MCS0)	-8.220	4.0	-12.22
Band II	5270	54	n	6.5/7.2 (MCS0)	-7.600	11.0	-18.60
	5310	62	n	6.5/7.2 (MCS0)	-7.790	11.0	-18.79
Band III	5510	102	n	6.5/7.2 (MCS0)	-7.787	11.0	-18.79
	5550	110	n	6.5/7.2 (MCS0)	-6.120	11.0	-17.12
	5670	134	n	6.5/7.2 (MCS0)	-7.740	11.0	-18.74

Table 6-8. Conducted Power Spectral Density Measurements (40MHz BW)






Figure 6-2. Test Instrument & Measurement Setup

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 29 of 95

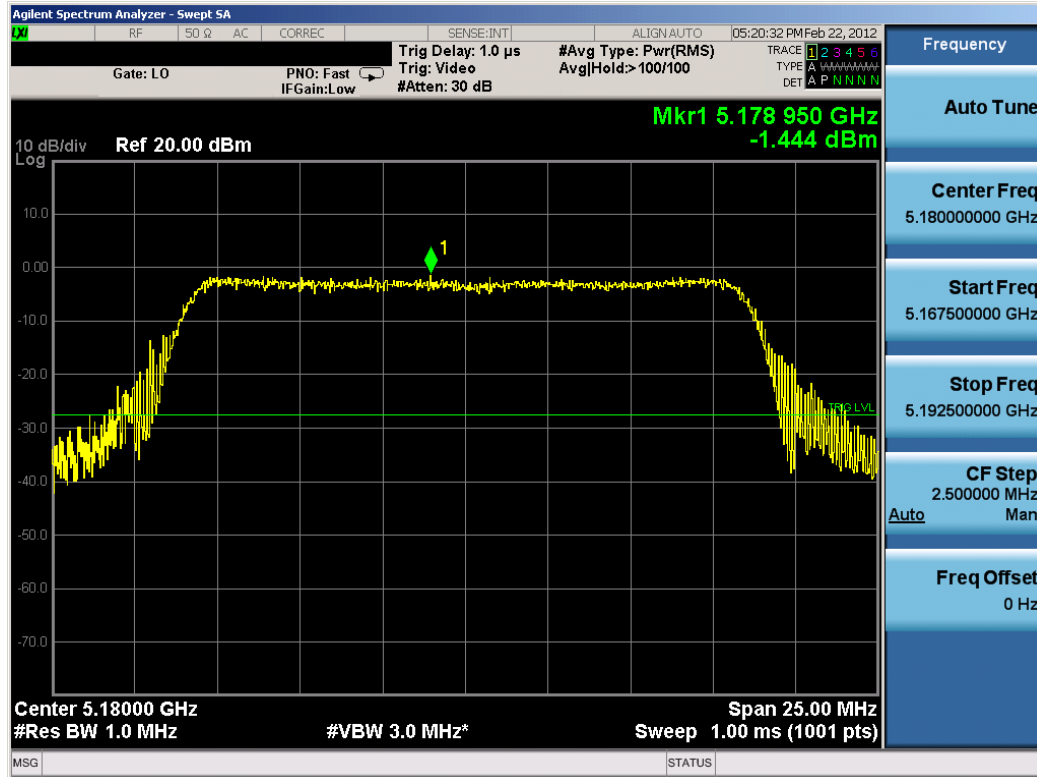


Plot 6-26. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

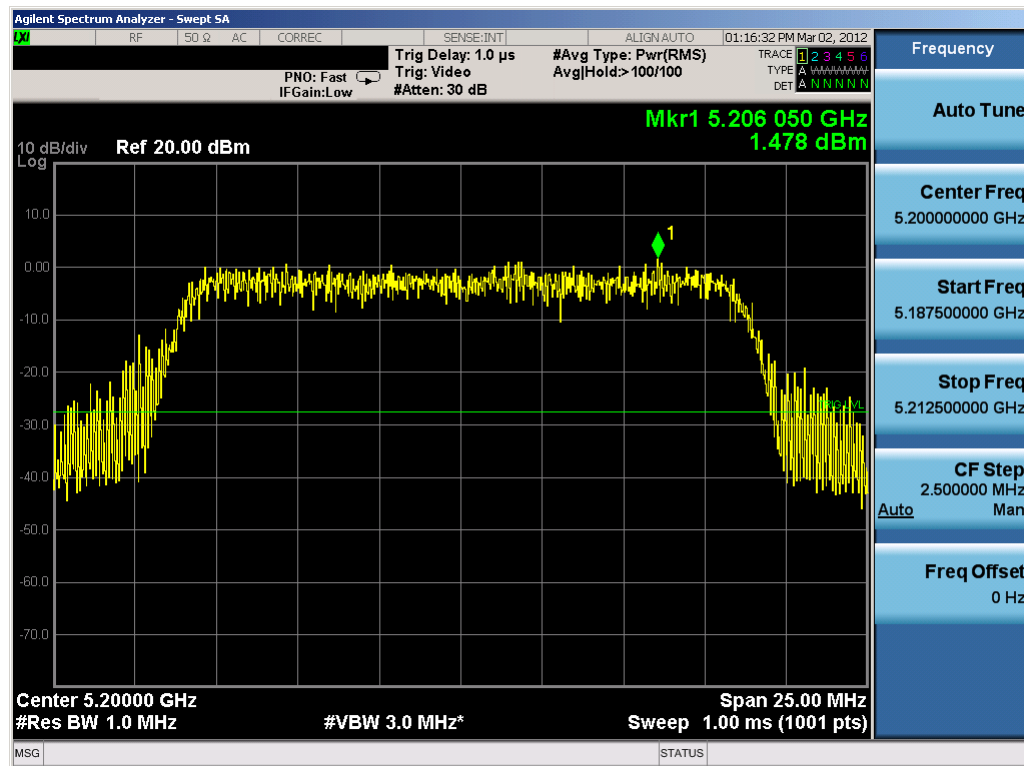


Plot 6-27. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 30 of 95

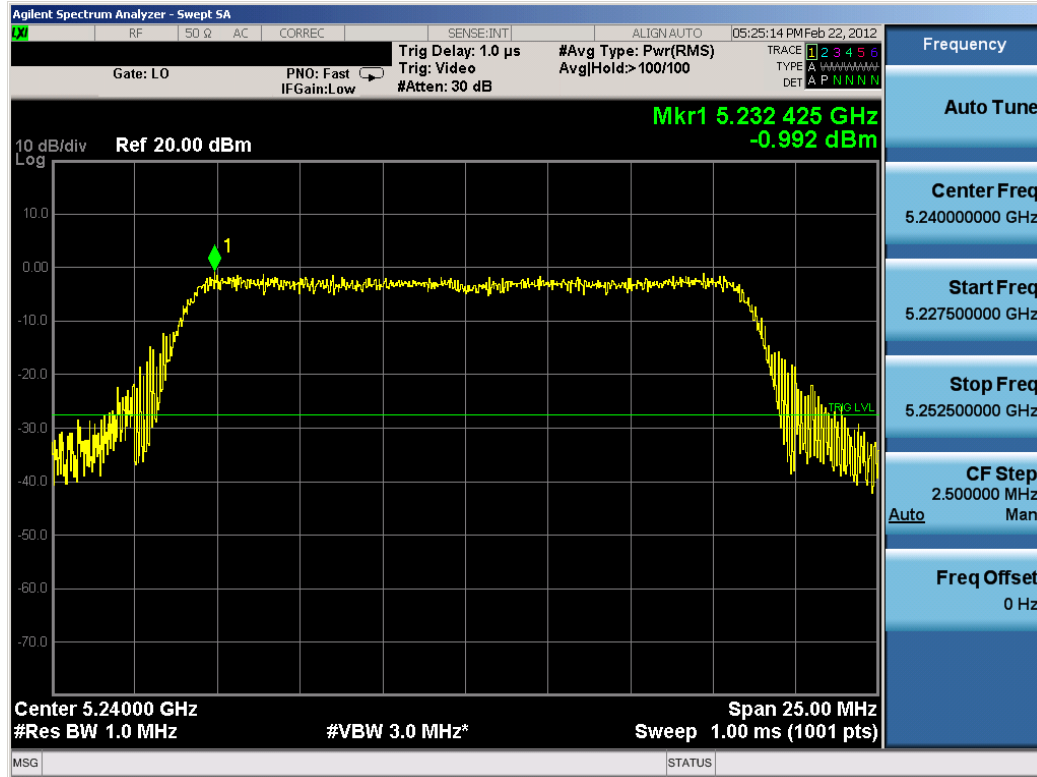


Plot 6-28. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

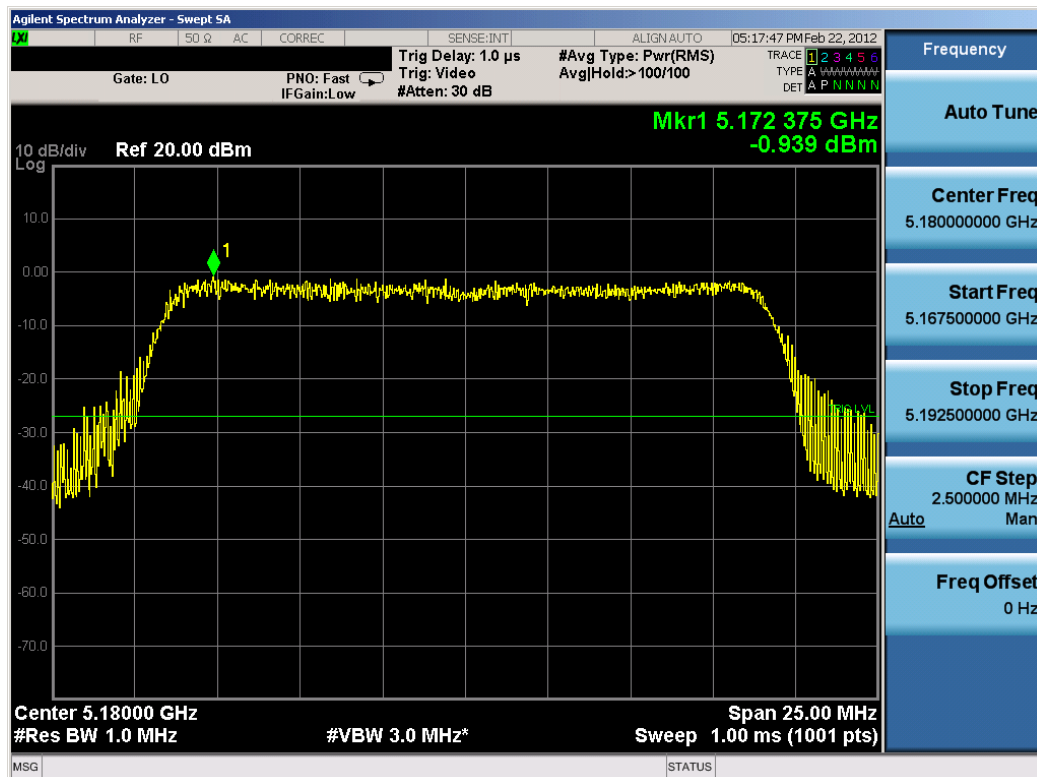


Plot 6-29. Peak Power Spectral Density Plot (802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 31 of 95

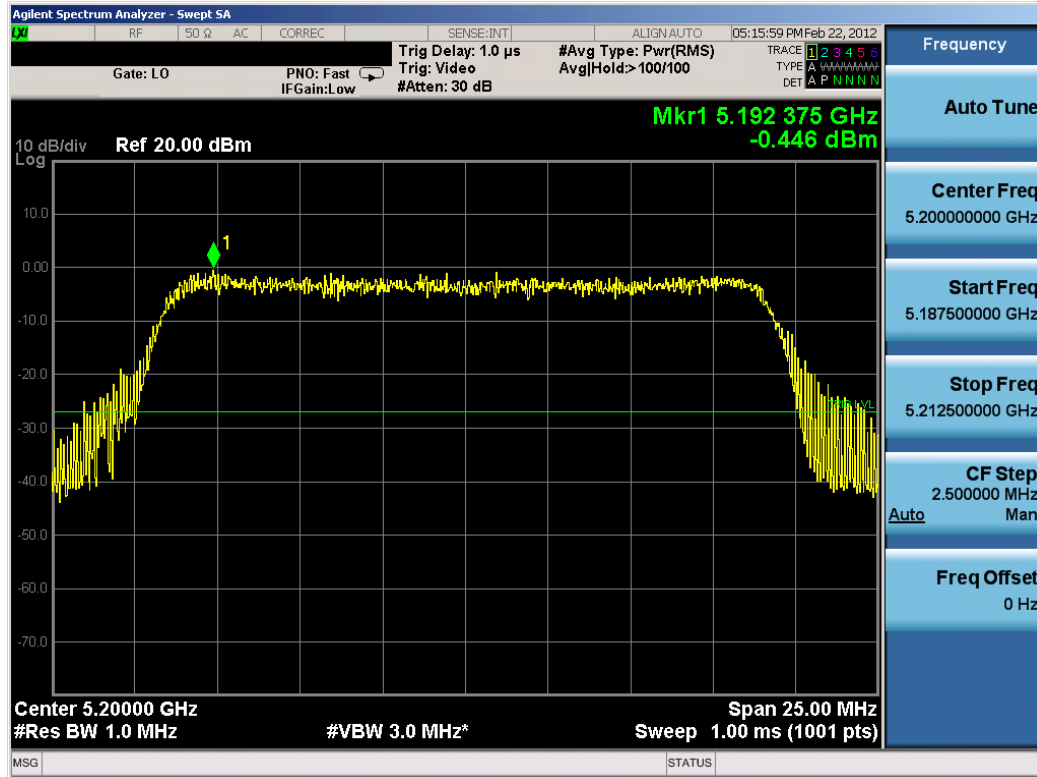


Plot 6-30. Peak Power Spectral Density Plot (802.11n (UNII Band 1) – Ch. 40)

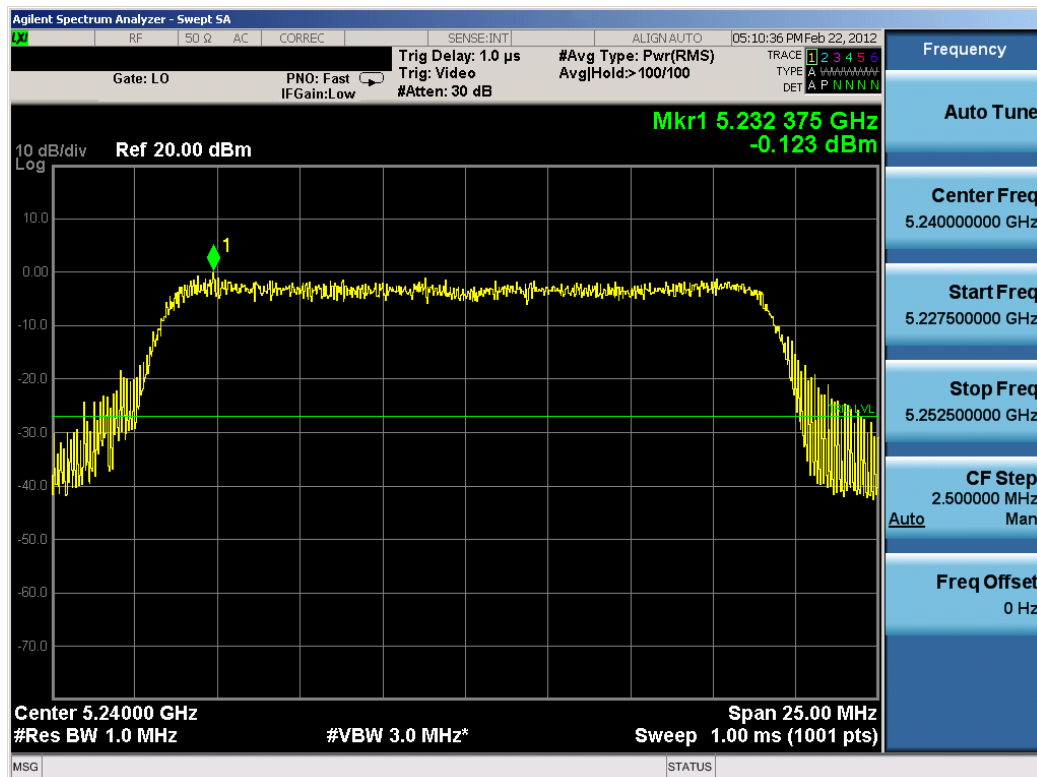


Plot 6-31. Peak Power Spectral Density Plot (802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 32 of 95

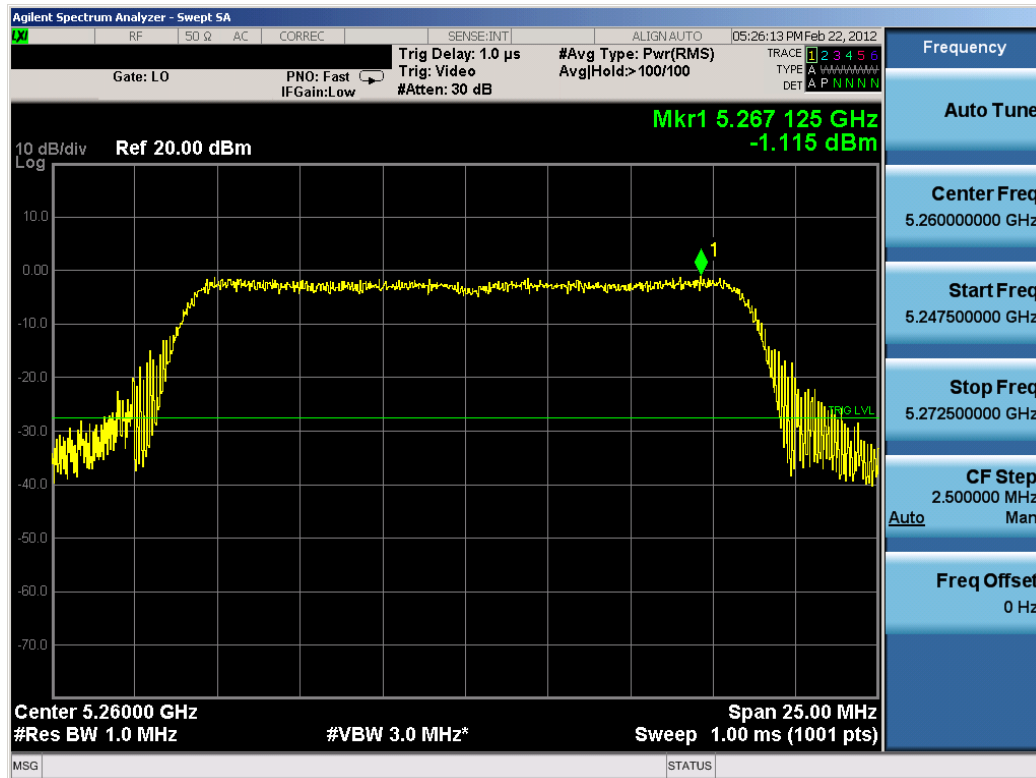


Plot 6-32. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

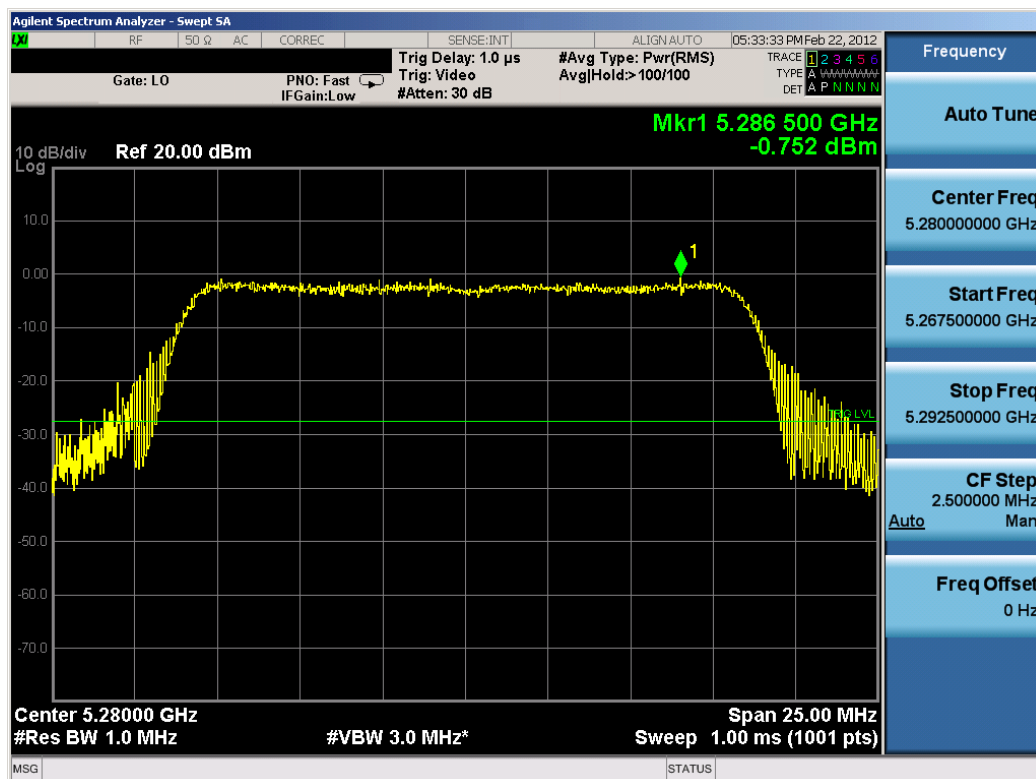


Plot 6-33. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 33 of 95

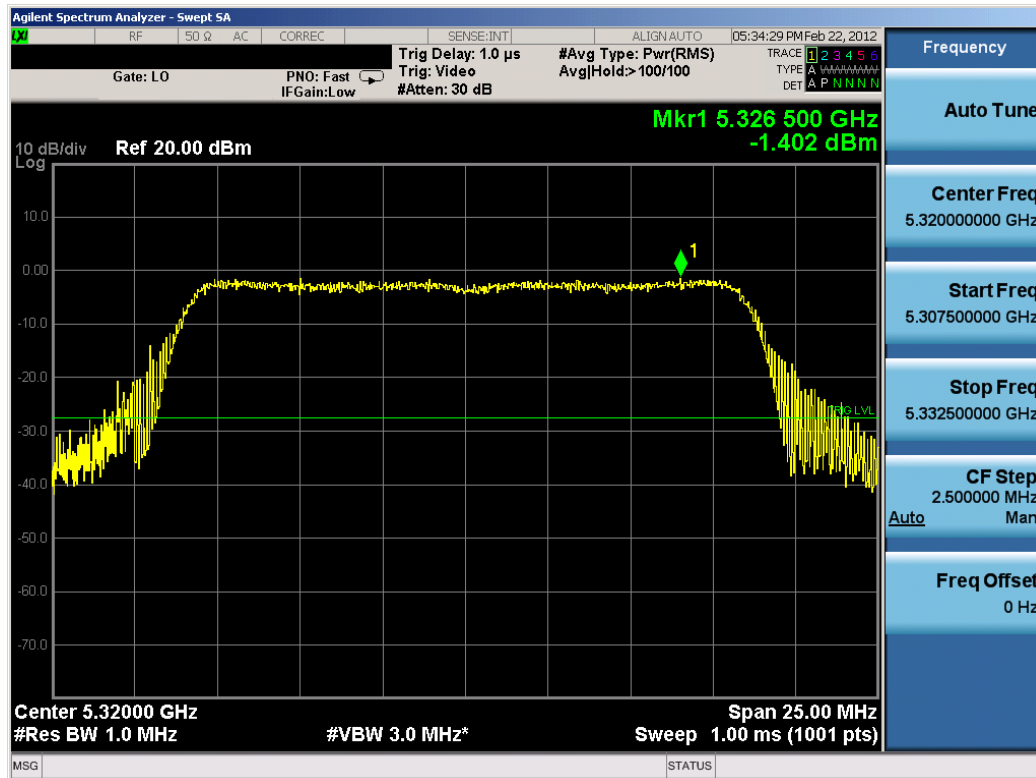


Plot 6-34. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

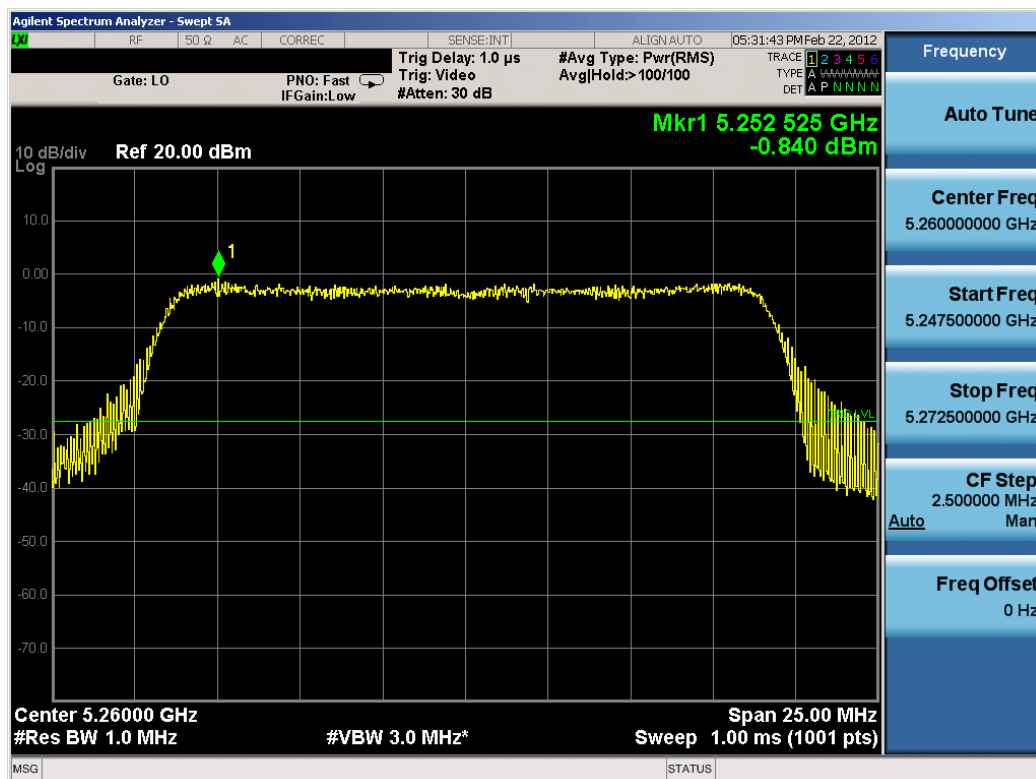


Plot 6-35. Peak Power Spectral Density Plot (802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LSGHT999	 FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 34 of 95

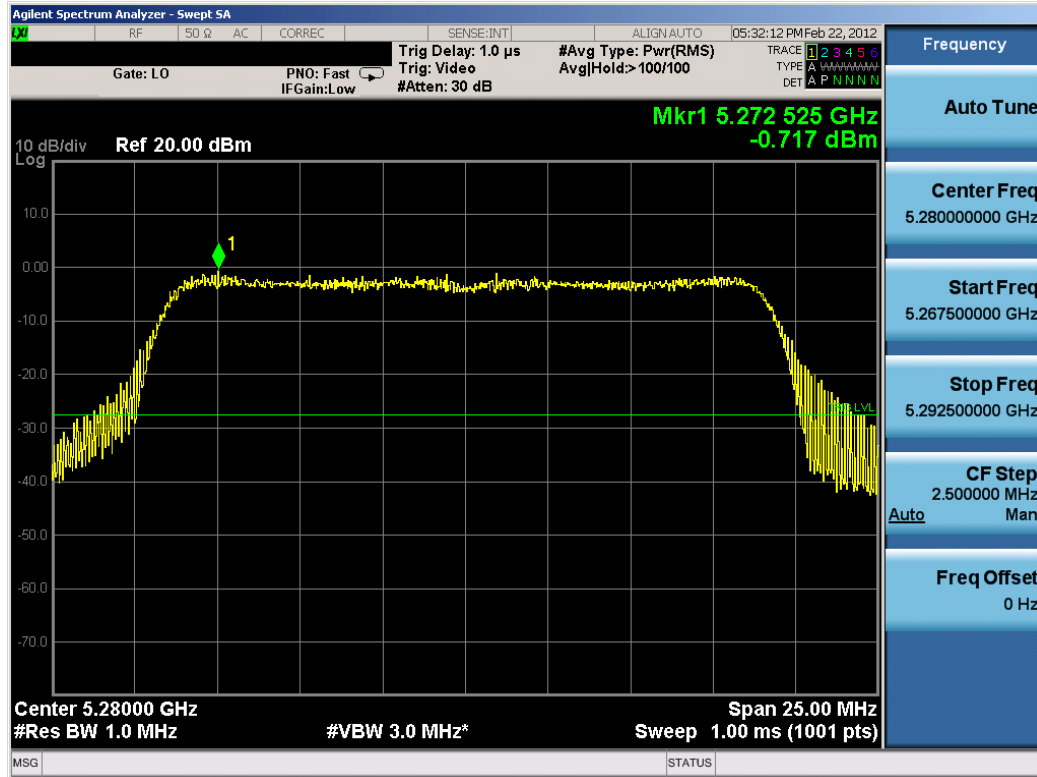


Plot 6-36. Peak Power Spectral Density Plot (802.11n (UNII Band 2) – Ch. 56)

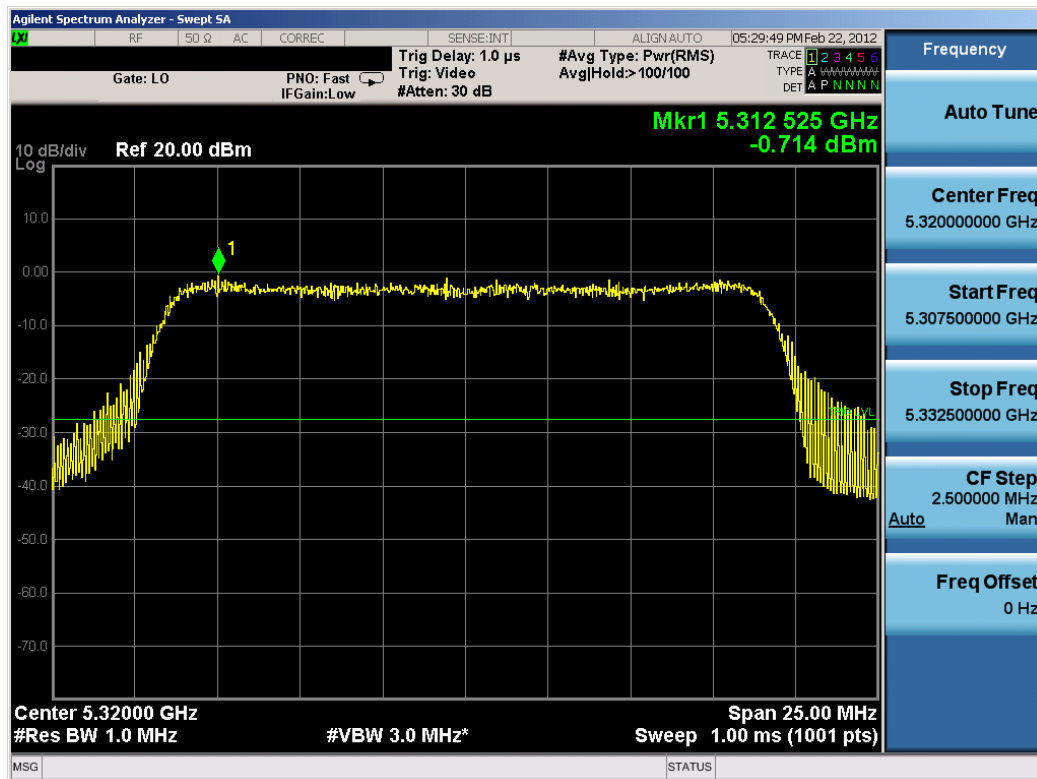


Plot 6-37. Peak Power Spectral Density Plot (802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 35 of 95

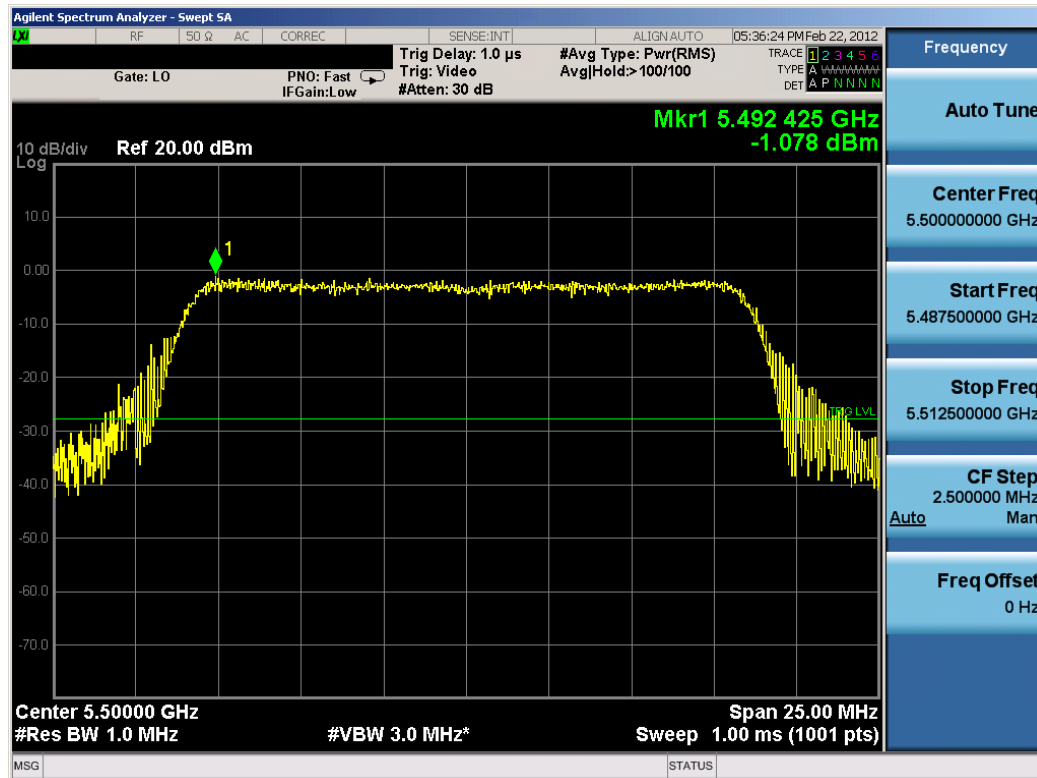


Plot 6-38. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)

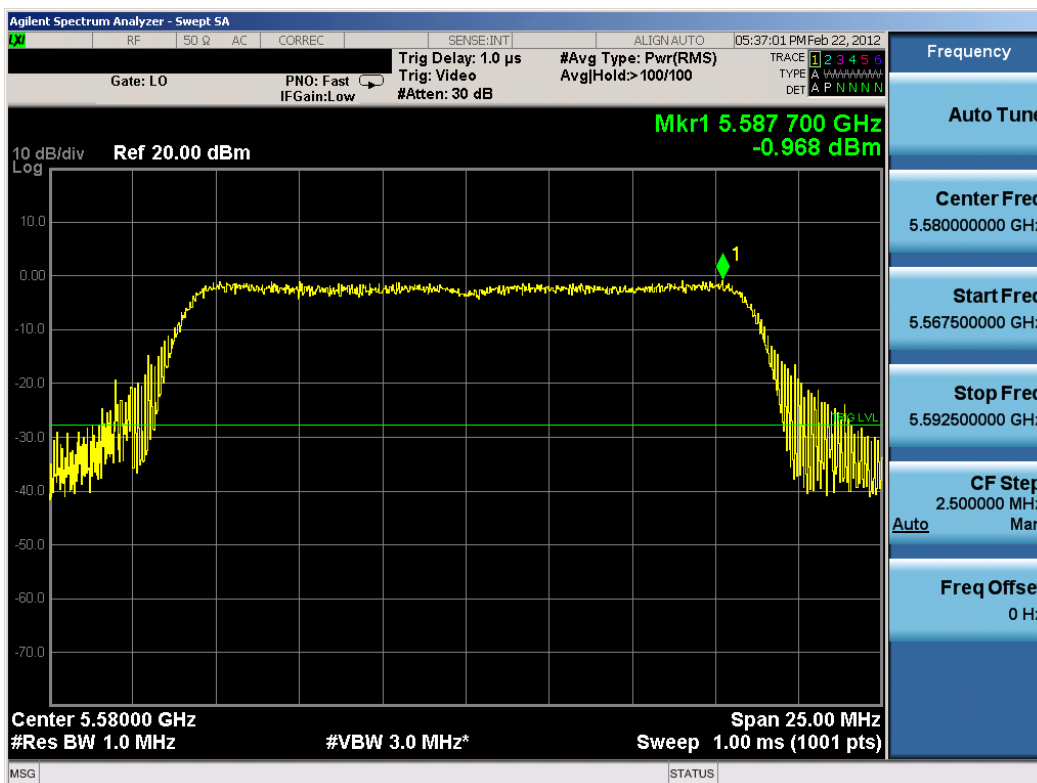


Plot 6-39. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LSGHT999	 FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 36 of 95

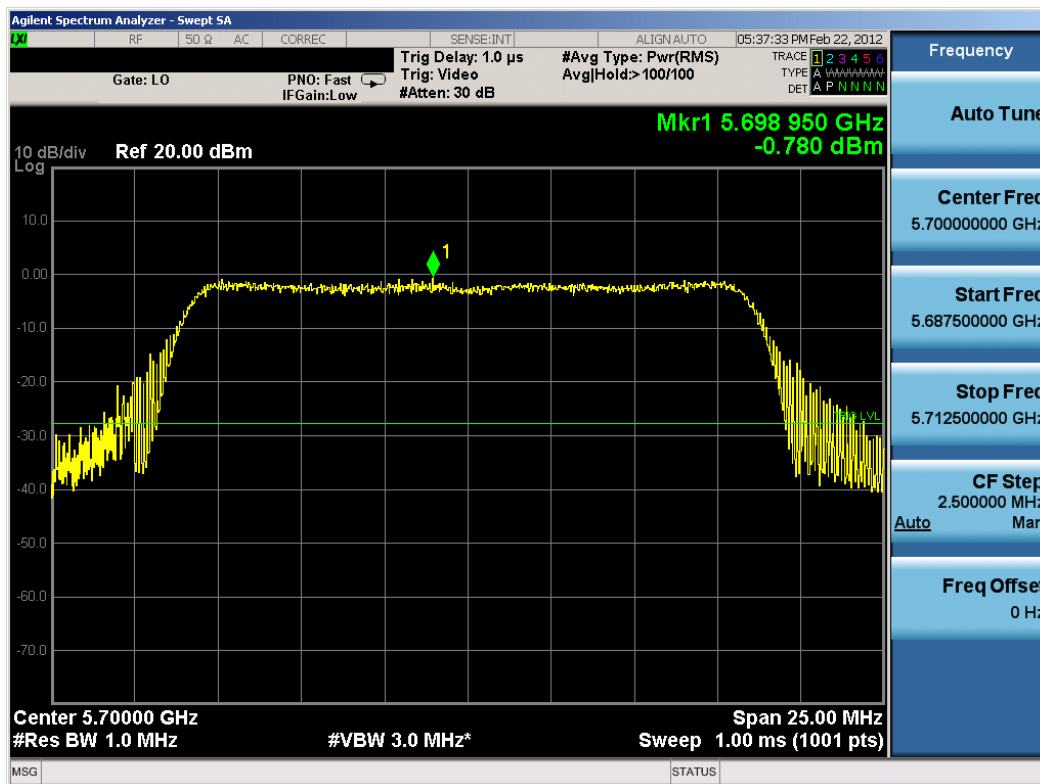


Plot 6-40. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 140)

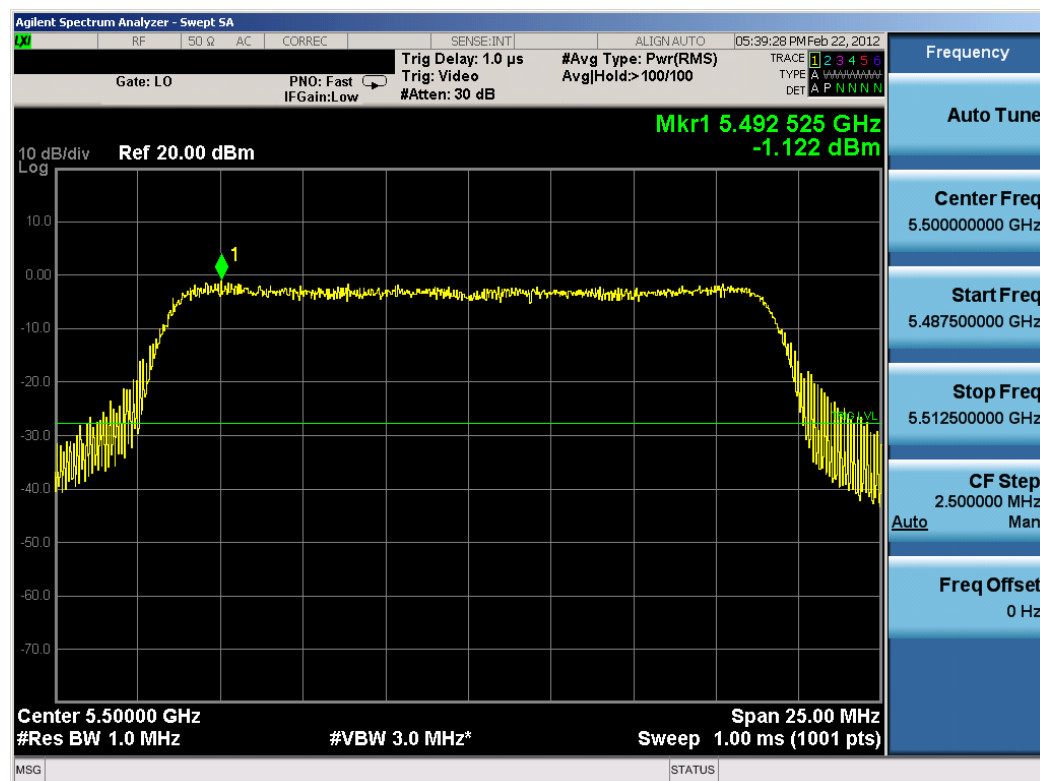


Plot 6-41. Peak Power Spectral Density Plot (802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 37 of 95

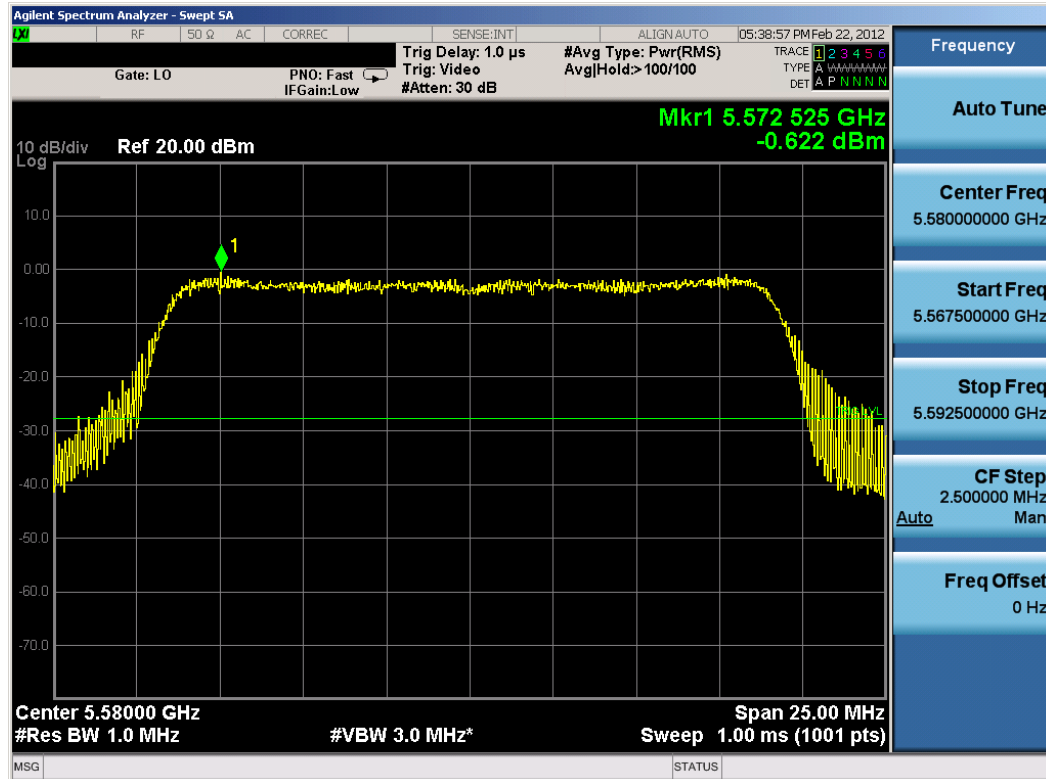


Plot 6-42. Peak Power Spectral Density Plot (802.11n (UNII Band 3) – Ch. 116)

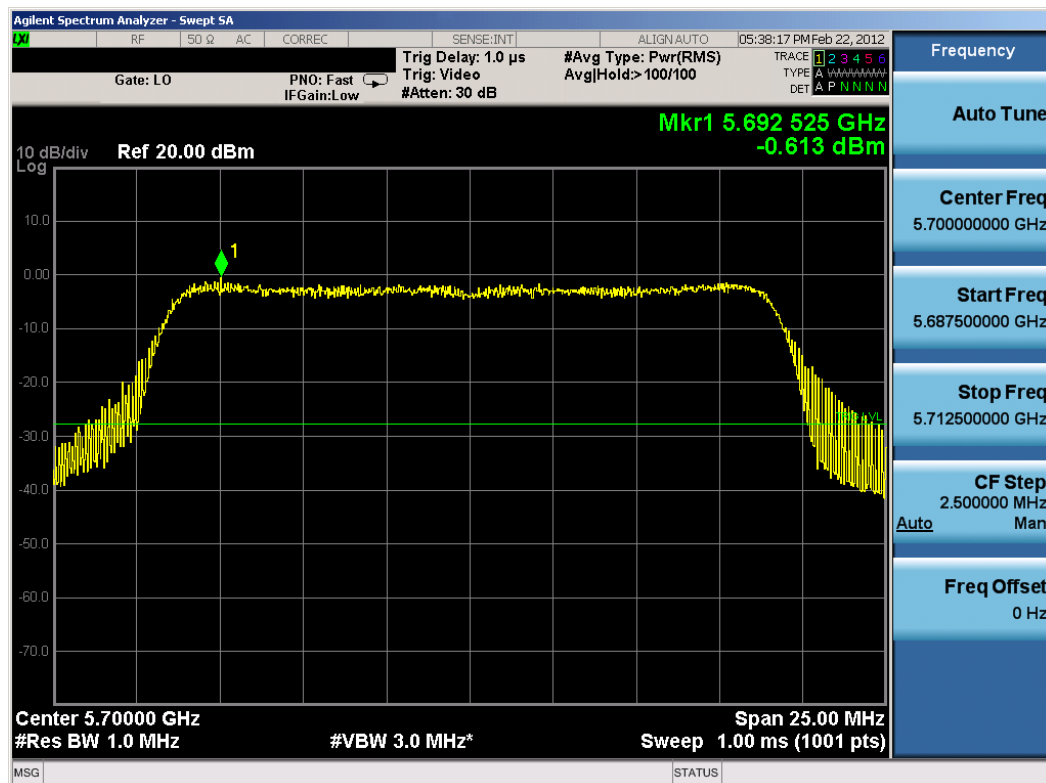


Plot 6-43. Peak Power Spectral Density Plot (802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 38 of 95

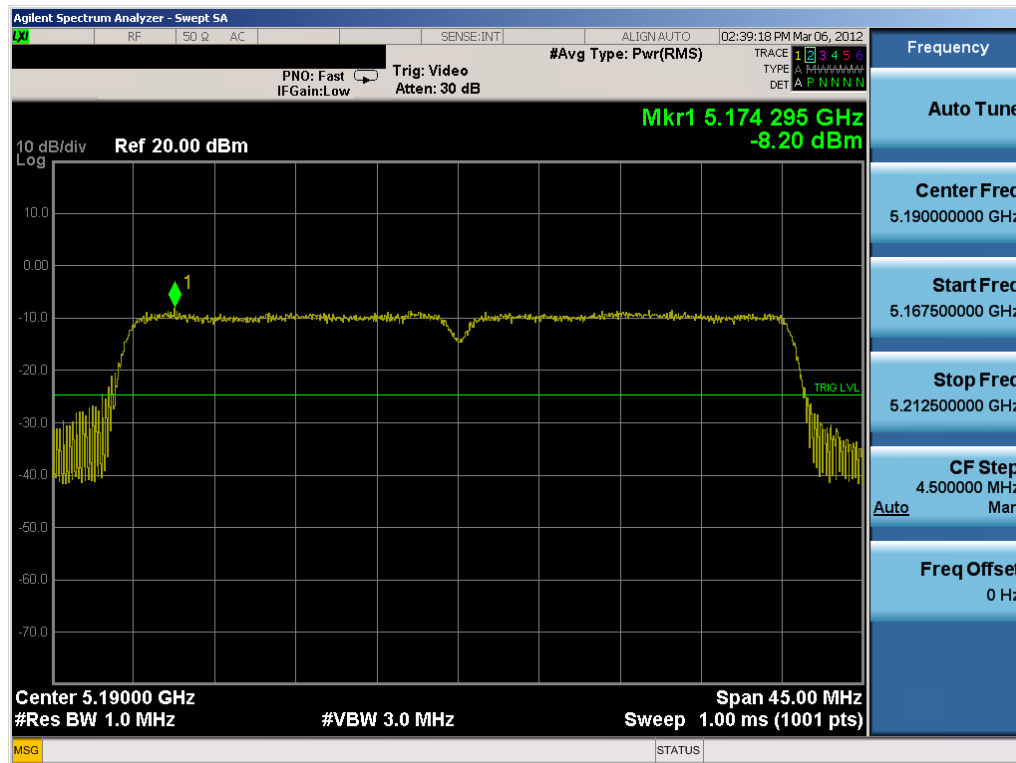


Plot 6-44. Peak Power Spectral Density Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 38)

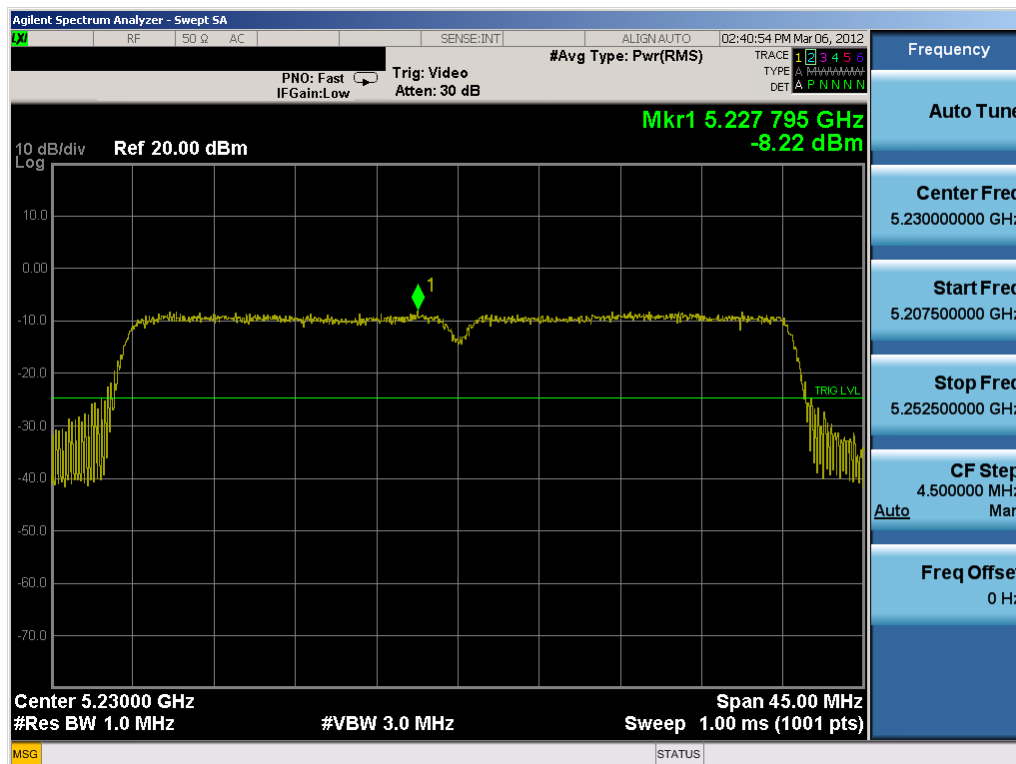


Plot 6-45. Peak Power Spectral Density Plot Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 46)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 39 of 95

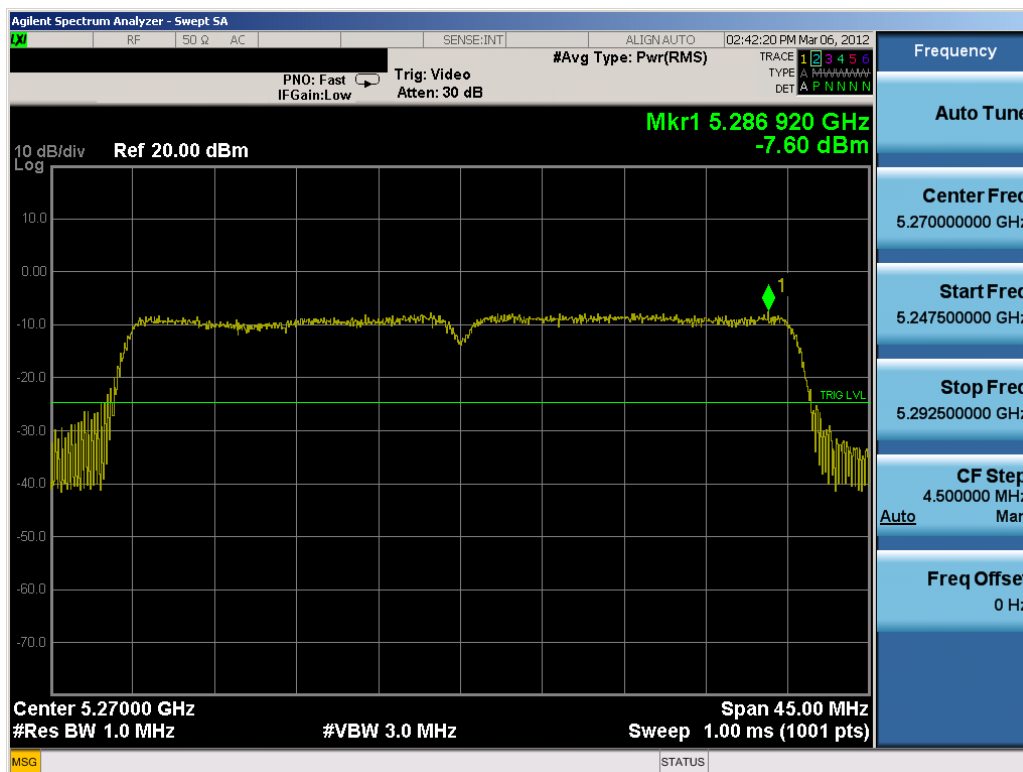


Plot 6-46. Peak Power Spectral Density Plot Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 54)

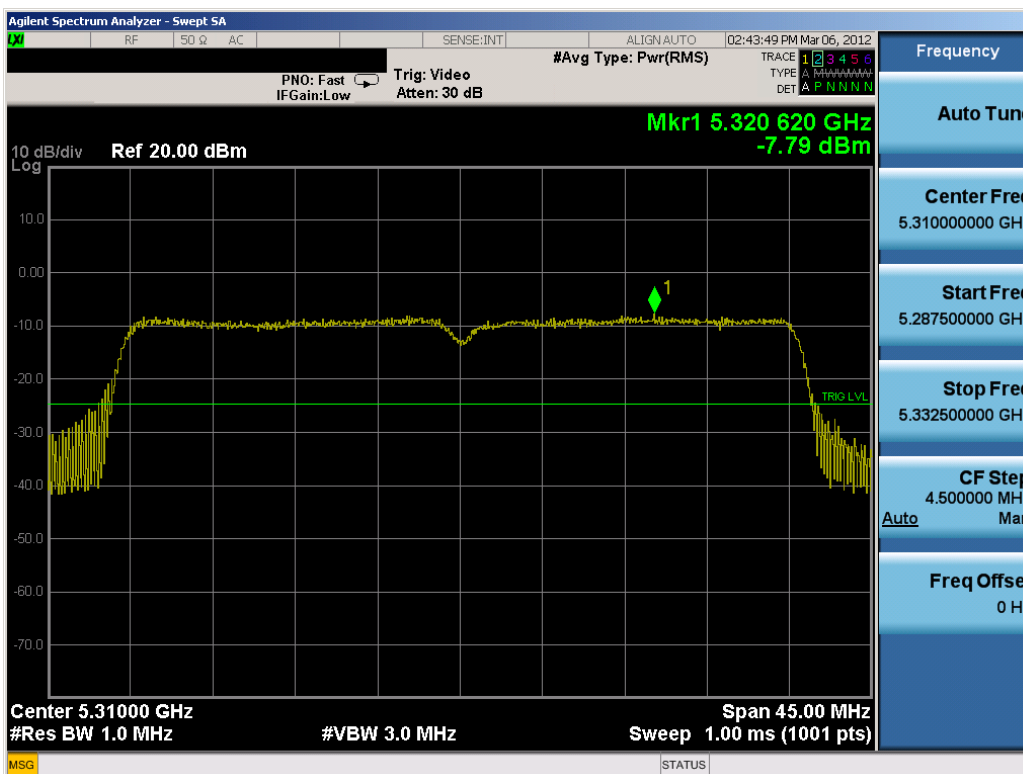


Plot 6-47. Peak Power Spectral Density Plot Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 62)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 40 of 95

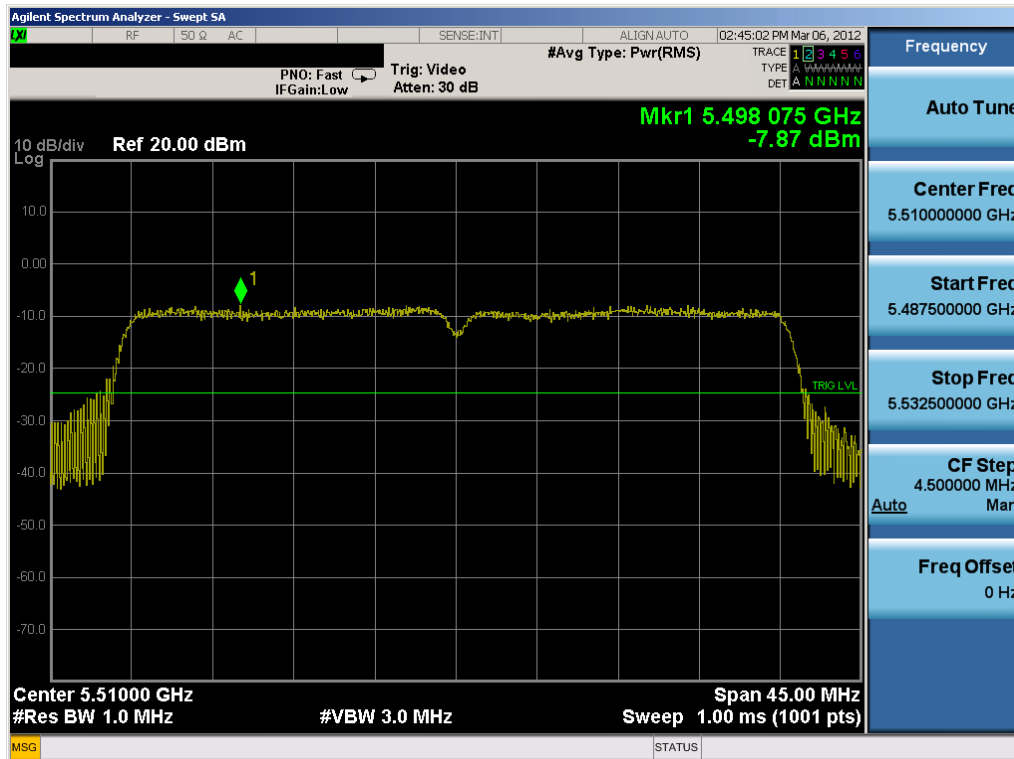


Plot 6-48. Peak Power Spectral Density Plot Plot (802.11n (UNII Band 3 – 40MHz BW) – Ch. 102)

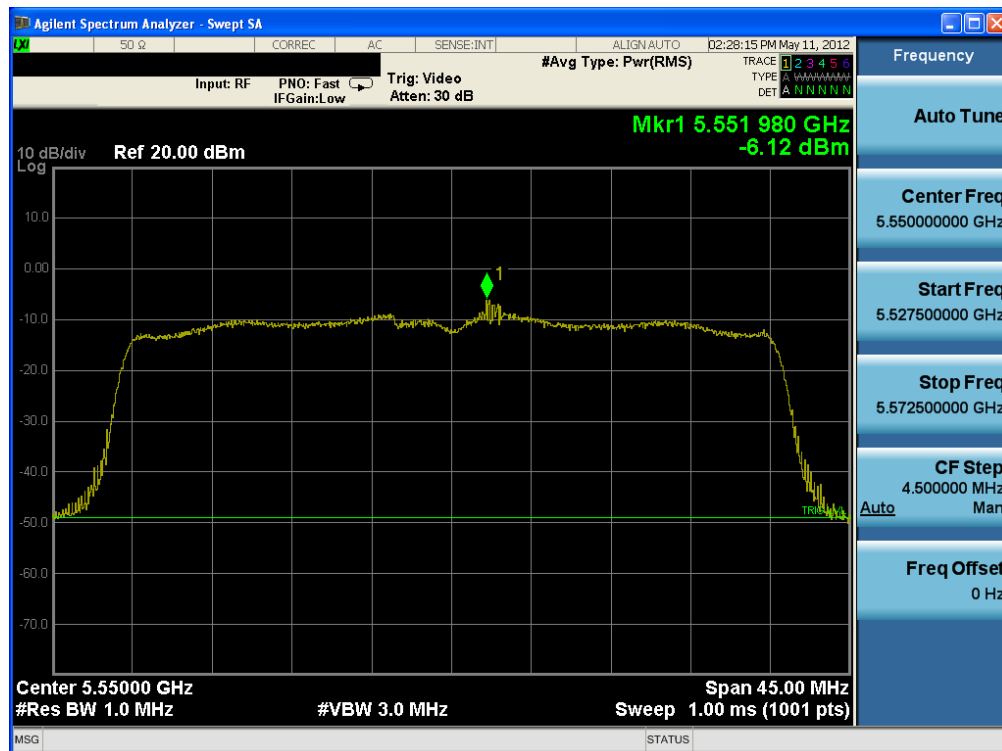

Plot 6-49. Peak Power Spectral Density Plot Plot (802.11n (UNII Band 3 – 40MHz BW) – Ch. 110)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 41 of 95

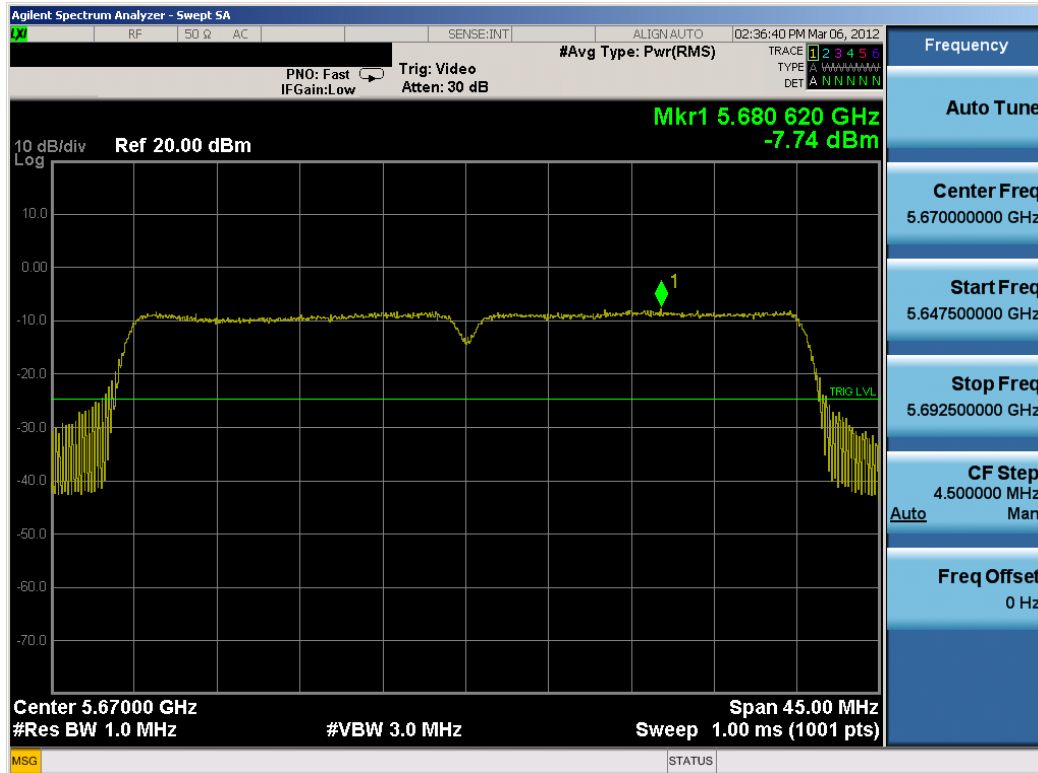

Plot 6-50. Peak Power Spectral Density Plot Plot (802.11n (UNII Band 3 – 40MHz BW) – Ch. 134)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 42 of 95

6.5 Peak Excursion Ratio – 802.11a/n

§15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. Method SA-1, as defined in KDB 789033, was used to generate the average signal trace and the procedure outlined in section F) was used to generate the peak signal trace. The peak and average traces are then used to determine the peak excursion.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum conducted output power is 13 dBm/MHz.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	10.09	13.0	-2.91
	5200	40	a	6	11.11	13.0	-1.89
	5240	48	a	6	11.46	13.0	-1.54
	5180	36	n	6.5/7.2 (MCS0)	8.90	13.0	-4.10
	5200	40	n	6.5/7.2 (MCS0)	9.55	13.0	-3.45
	5240	48	n	6.5/7.2 (MCS0)	7.69	13.0	-5.31
Band II	5260	52	a	6	5.74	13.0	-7.26
	5280	56	a	6	9.36	13.0	-3.64
	5320	64	a	6	9.19	13.0	-3.81
	5260	52	n	6.5/7.2 (MCS0)	6.14	13.0	-6.86
	5280	56	n	6.5/7.2 (MCS0)	9.09	13.0	-3.91
	5320	64	n	6.5/7.2 (MCS0)	7.61	13.0	-5.39
Band III	5500	100	a	6	10.14	13.0	-2.86
	5580	116	a	6	8.64	13.0	-4.36
	5700	140	a	6	9.04	13.0	-3.96
	5500	100	n	6.5/7.2 (MCS0)	9.44	13.0	-3.56
	5580	116	n	6.5/7.2 (MCS0)	7.86	13.0	-5.14
	5700	140	n	6.5/7.2 (MCS0)	8.07	13.0	-4.93

Table 6-9. Conducted Peak Excursion Ratio Measurements (20MHz BW)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 43 of 95

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
Band I	5190	38	n	6.5/7.2 (MCS0)	9.63	13.0	-3.37
	5230	46	n	6.5/7.2 (MCS0)	9.16	13.0	-3.84
Band II	5270	54	n	6.5/7.2 (MCS0)	10.35	13.0	-2.65
	5310	62	n	6.5/7.2 (MCS0)	9.61	13.0	-3.39
Band III	5510	102	n	6.5/7.2 (MCS0)	8.67	13.0	-4.33
	5550	110	n	6.5/7.2 (MCS0)	11.54	13.0	-1.46
	5670	134	n	6.5/7.2 (MCS0)	6.46	13.0	-6.54

Table 6-10. Conducted Peak Excursion Ratio Measurements (40MHz BW)






Figure 6-3. Test Instrument & Measurement Setup

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 44 of 95

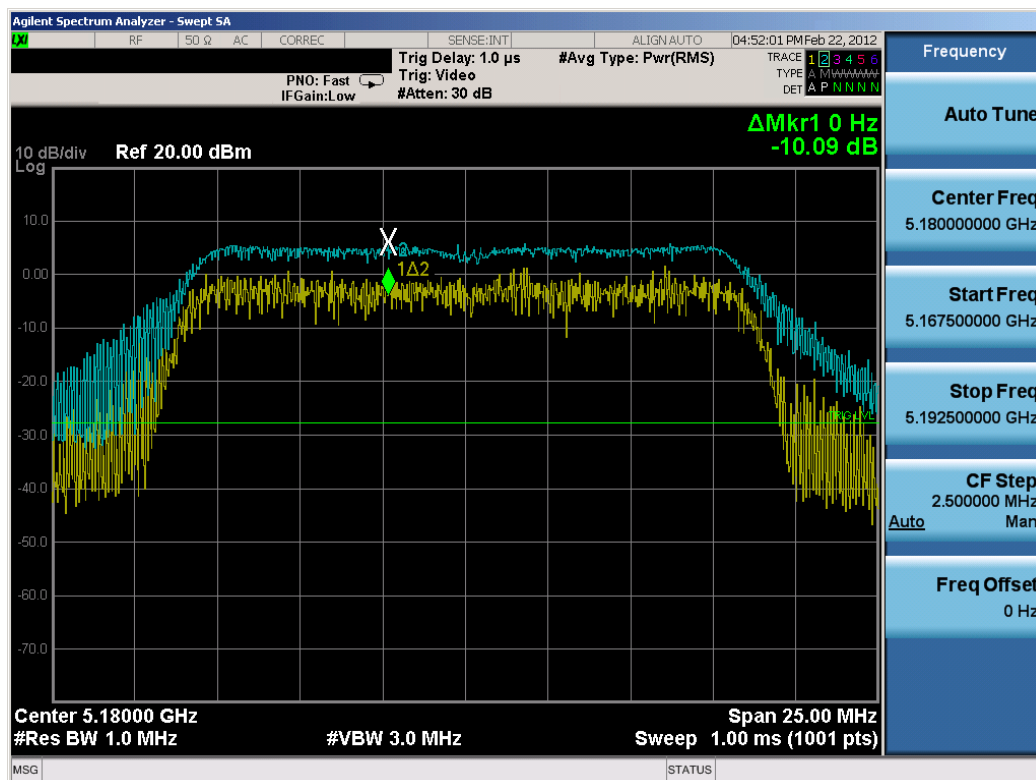


Plot 6-51. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 36)

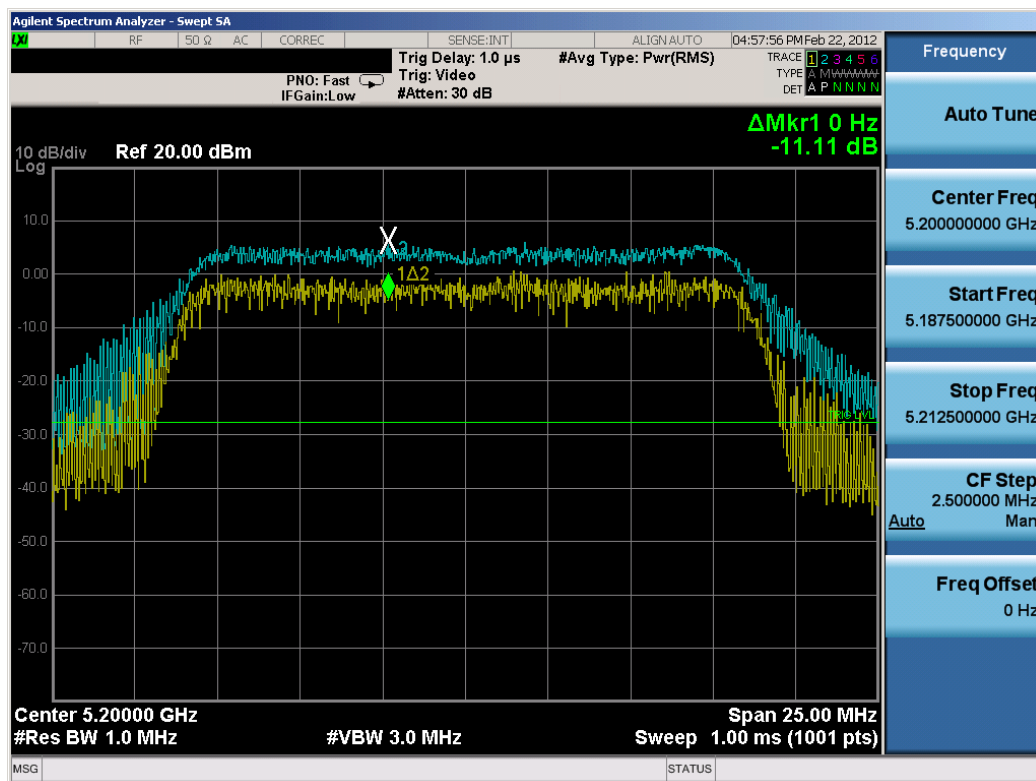


Plot 6-52. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 45 of 95

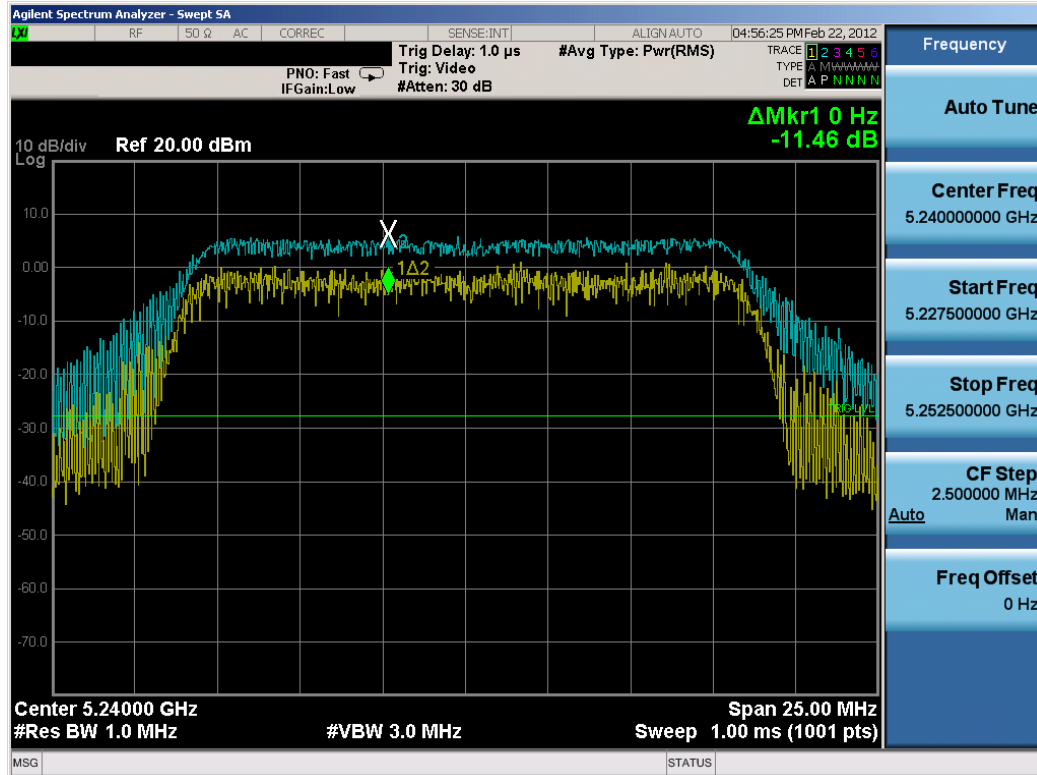


Plot 6-53. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 48)

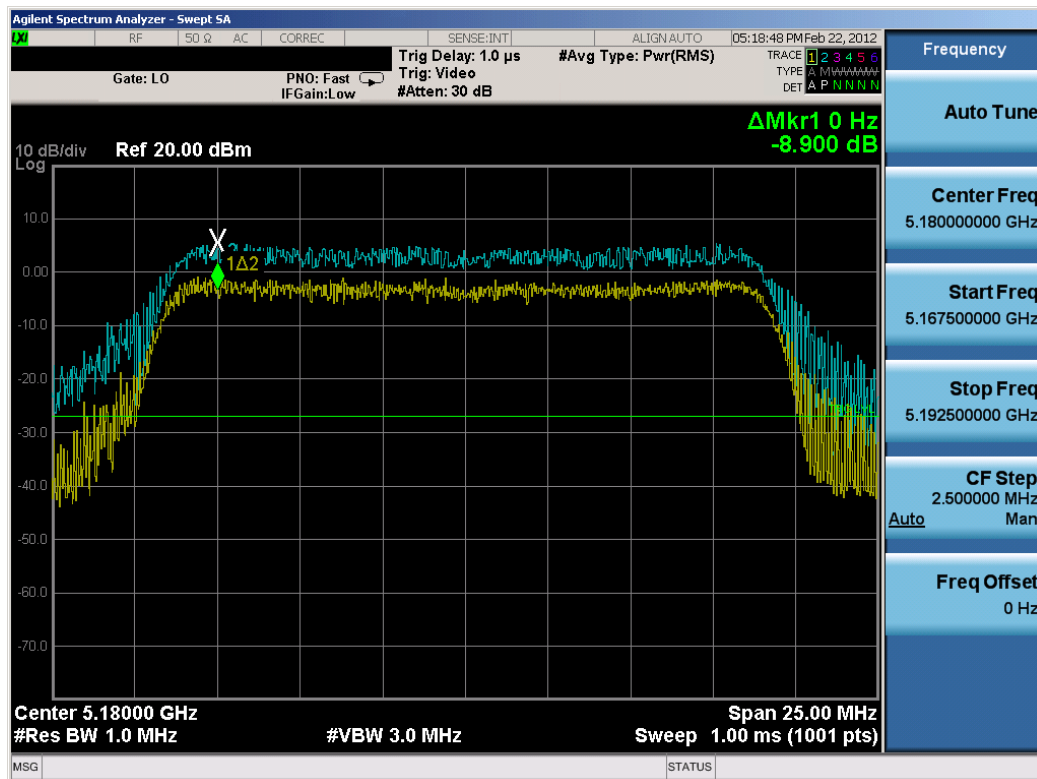


Plot 6-54. Peak Excursion Ratio Plot (802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 46 of 95

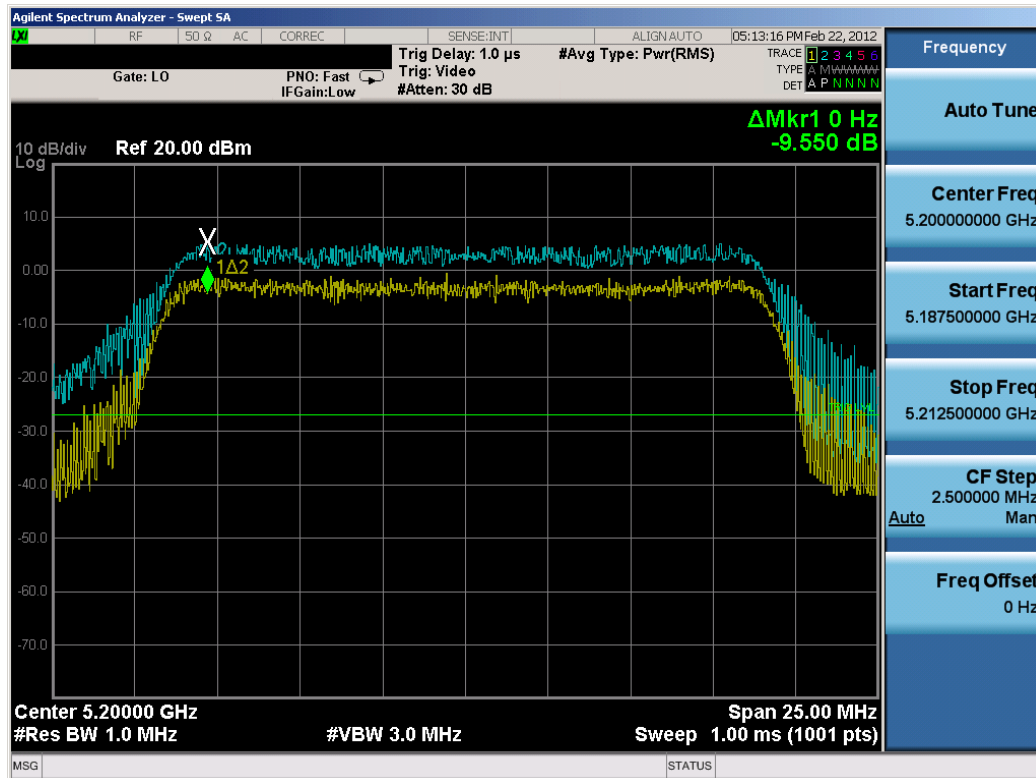


Plot 6-55. Peak Excursion Ratio Plot (802.11n (UNII Band 1) – Ch. 40)

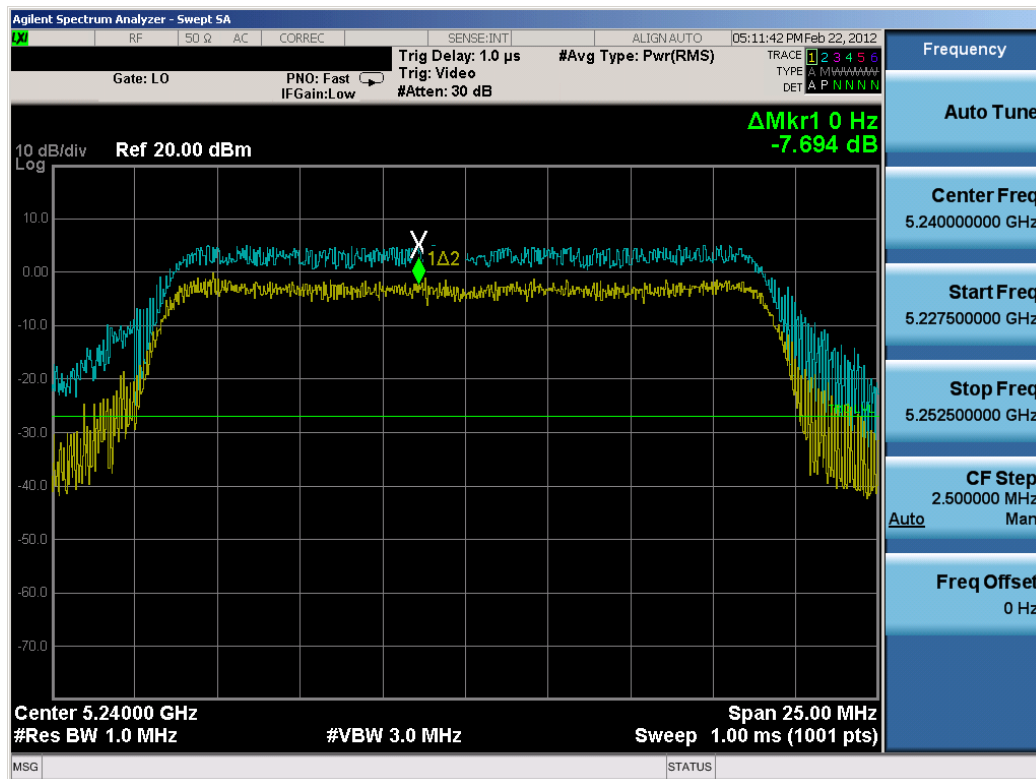


Plot 6-56. Peak Excursion Ratio Plot (802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 47 of 95

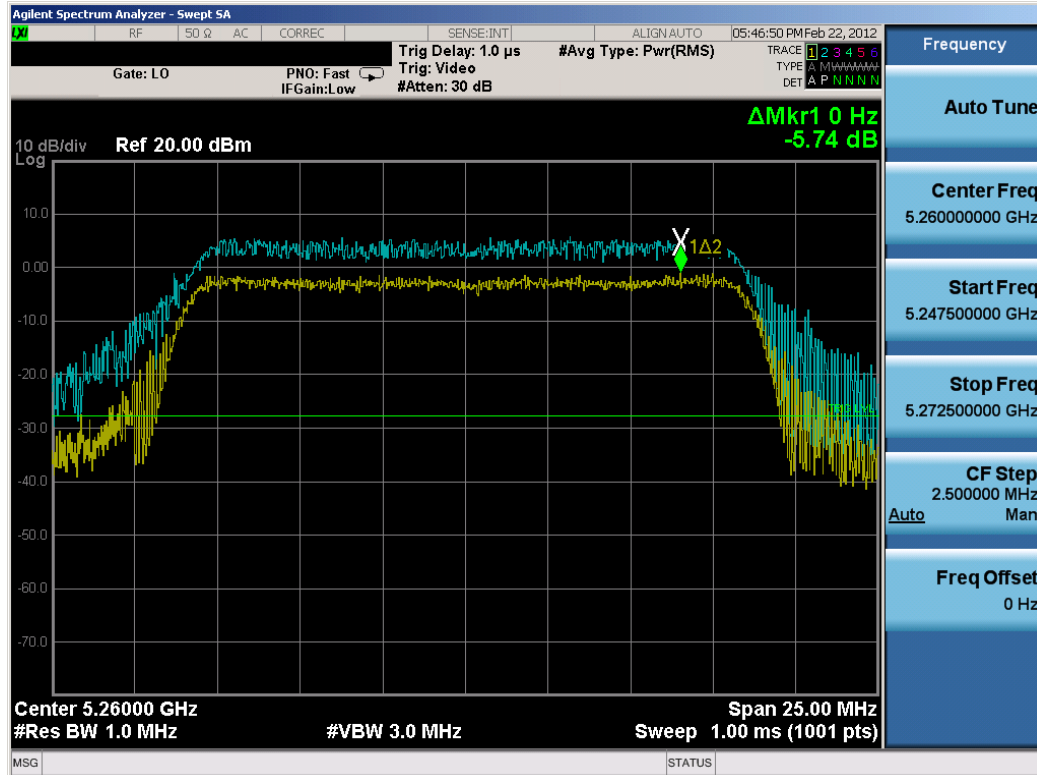


Plot 6-57. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 52)

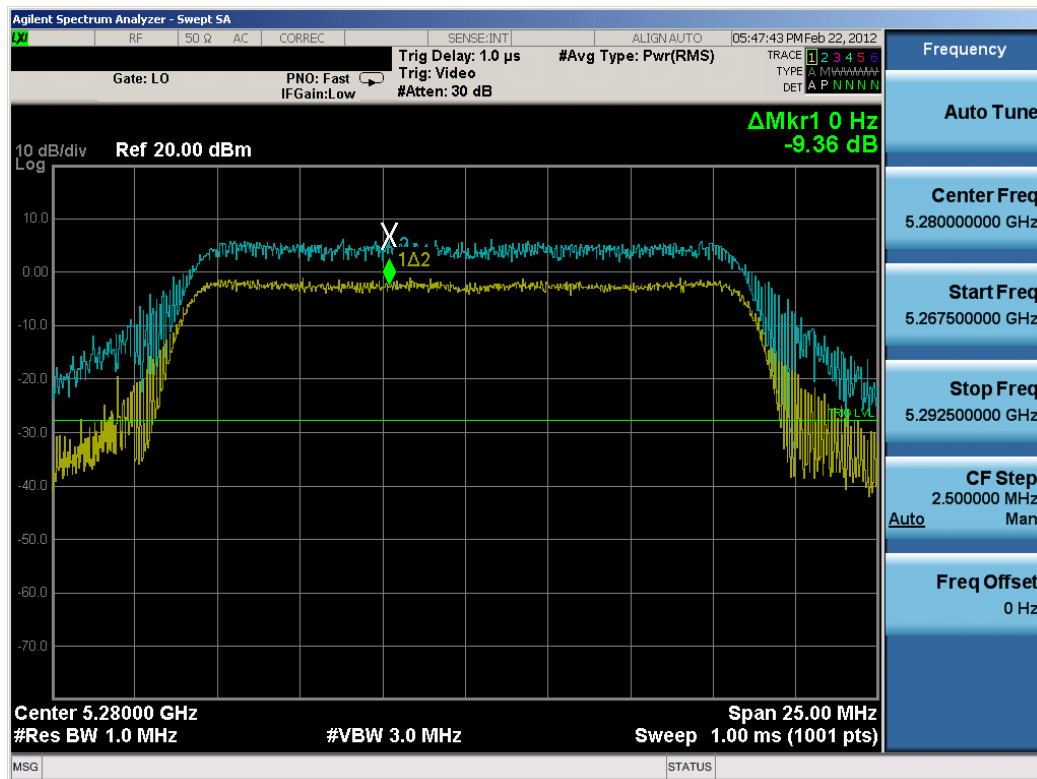


Plot 6-58. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 48 of 95

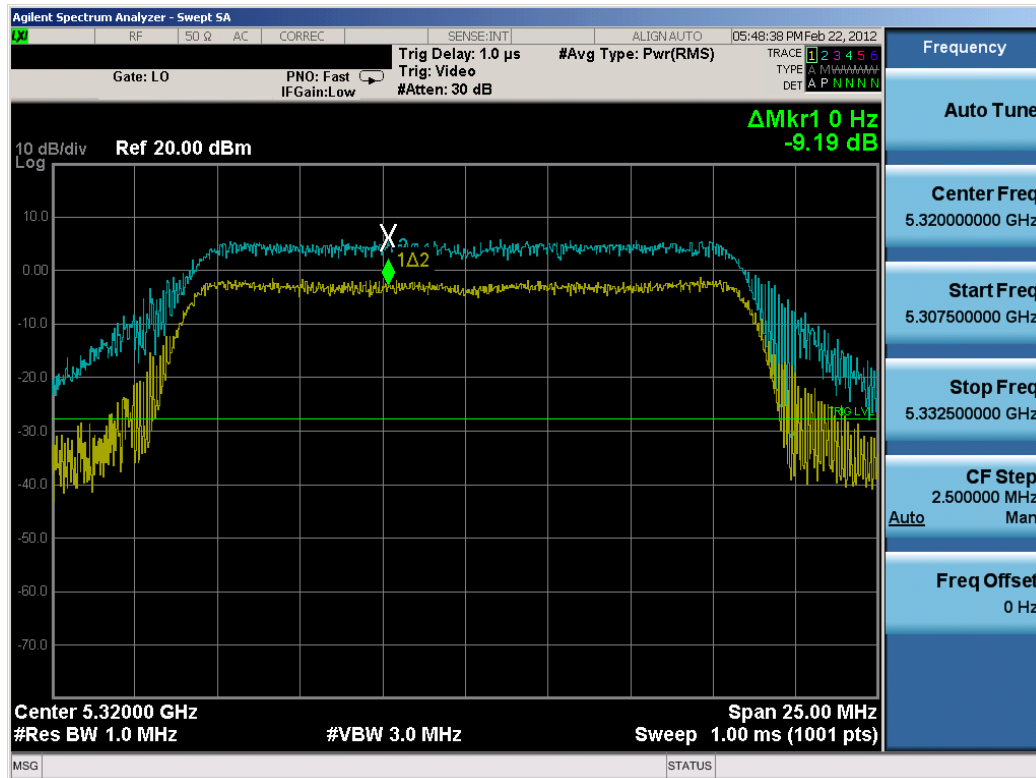


Plot 6-59. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 64)

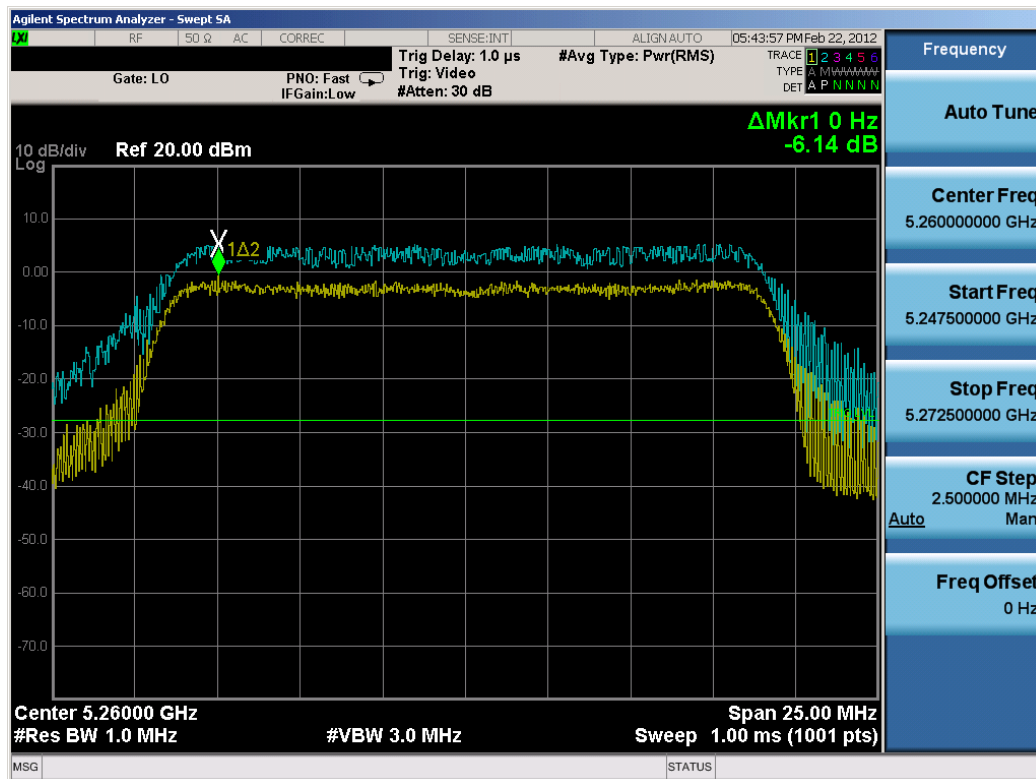


Plot 6-60. Peak Excursion Ratio Plot (802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 49 of 95

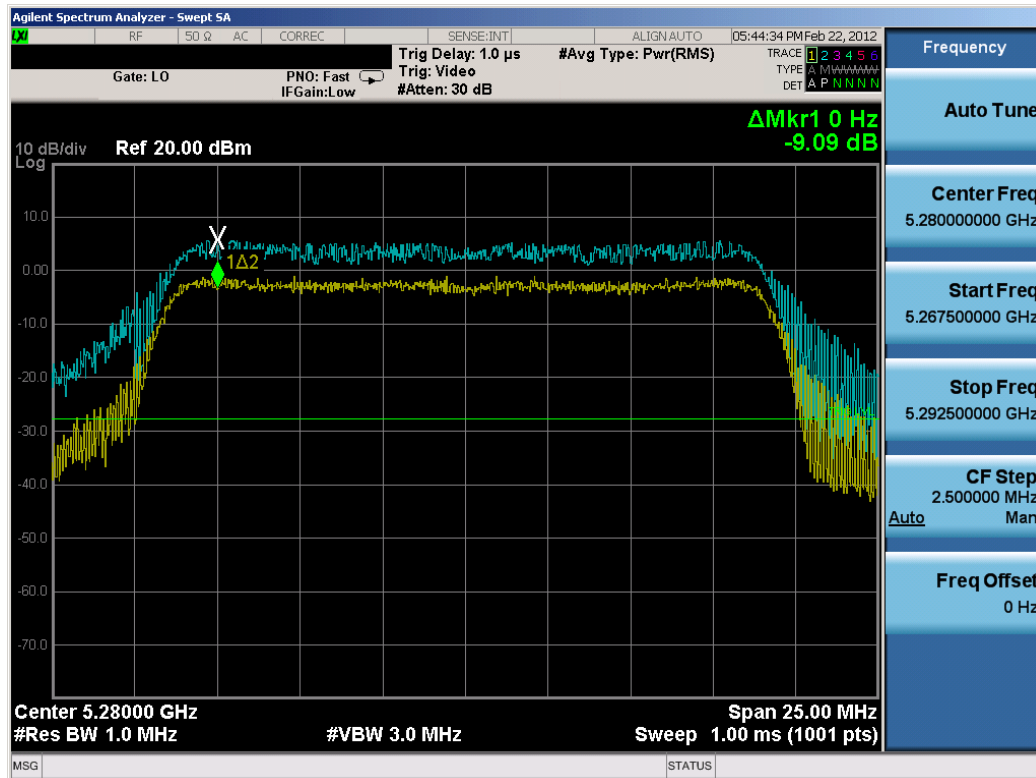


Plot 6-61. Peak Excursion Ratio Plot (802.11n (UNII Band 2) – Ch. 56)

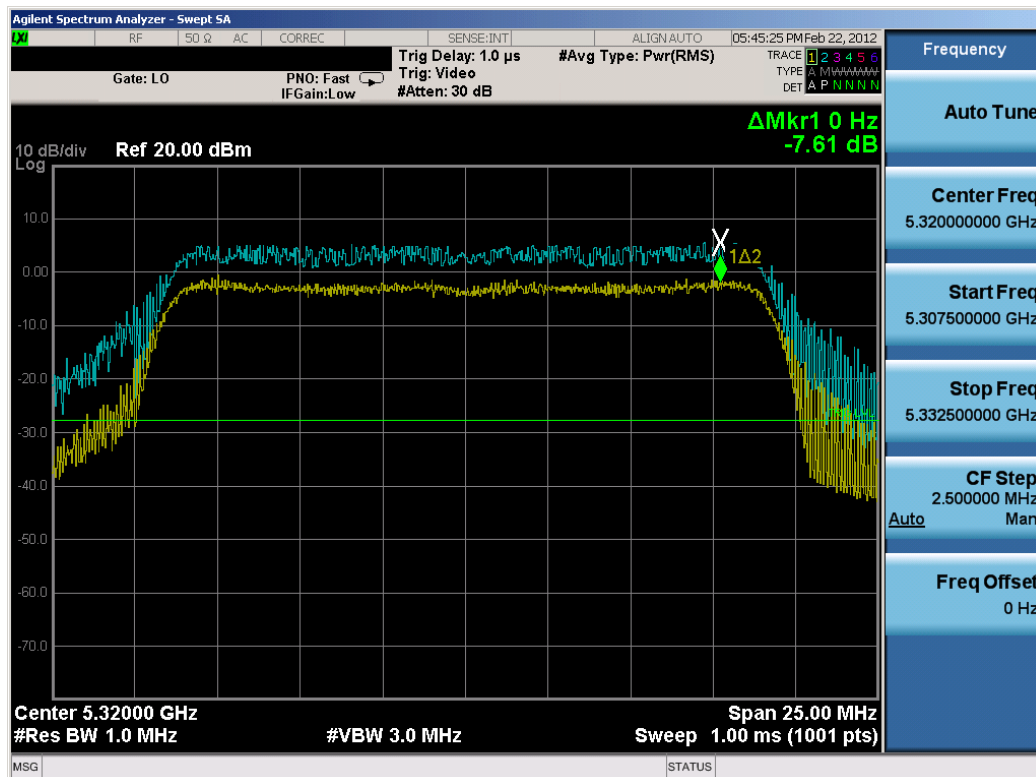


Plot 6-62. Peak Excursion Ratio Plot (802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 50 of 95

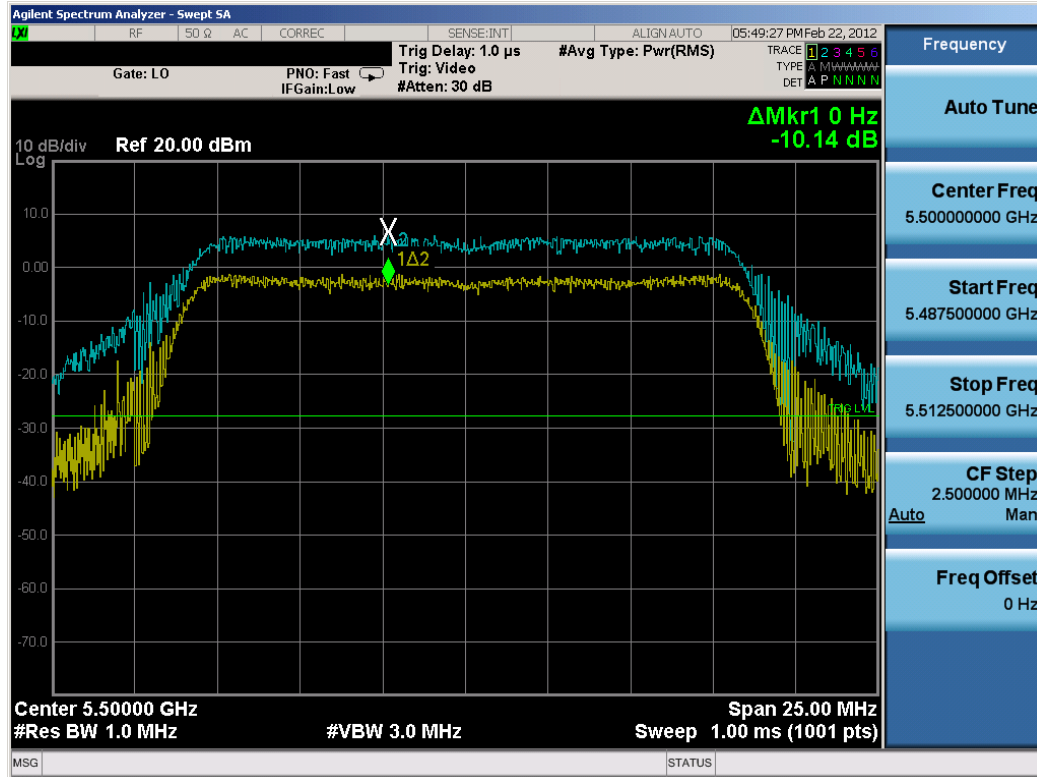


Plot 6-63. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 100)

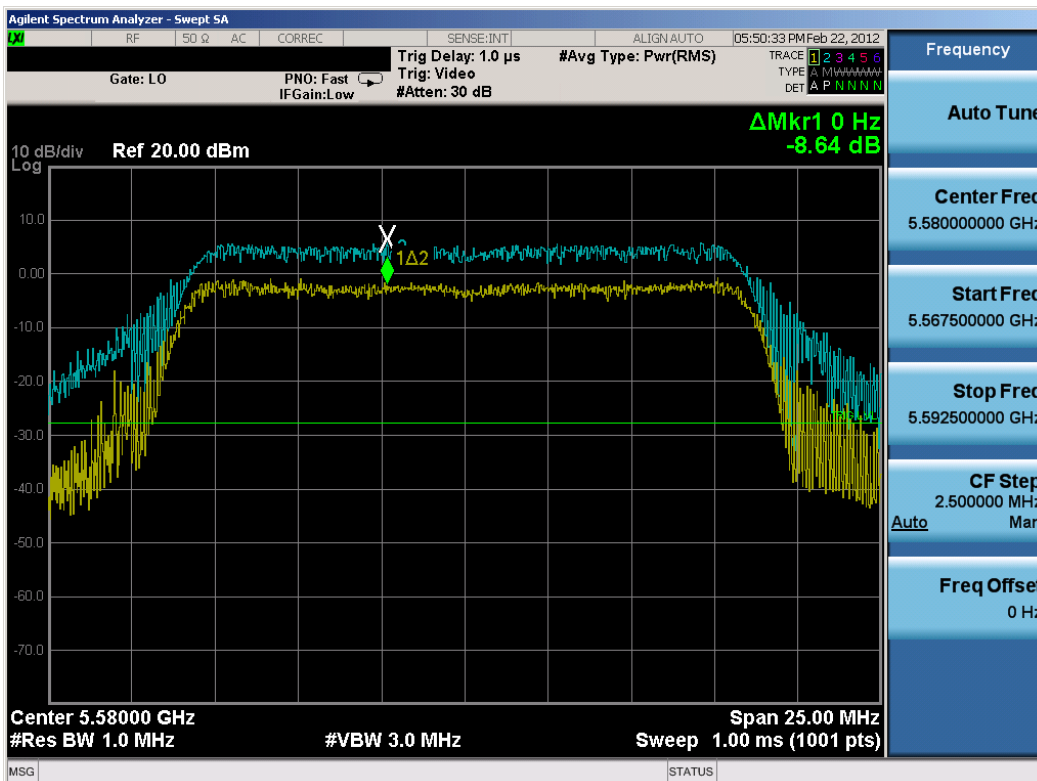


Plot 6-64. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 51 of 95

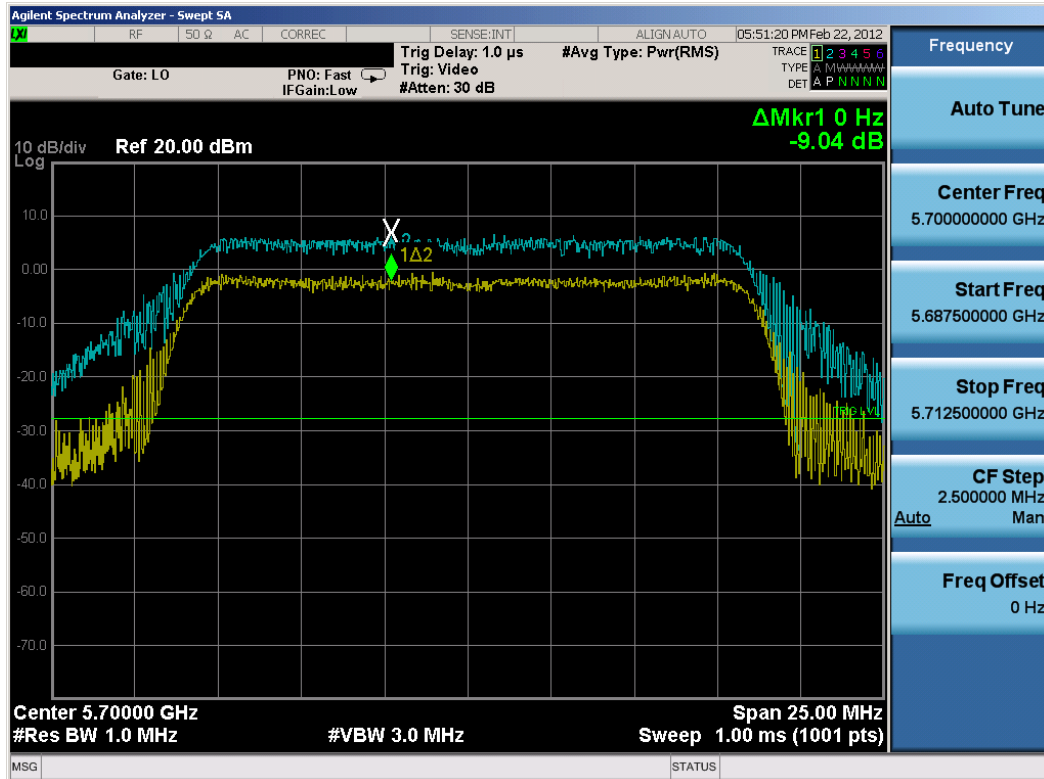


Plot 6-65. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 140)

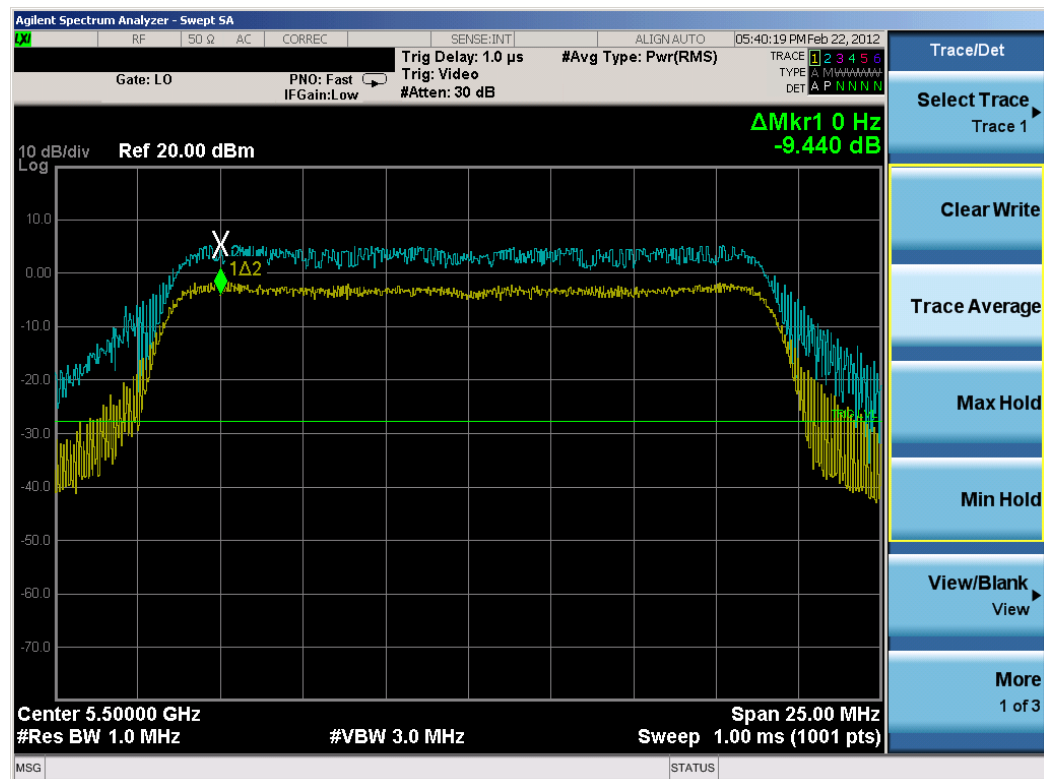


Plot 6-66. Peak Excursion Ratio Plot (802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 52 of 95

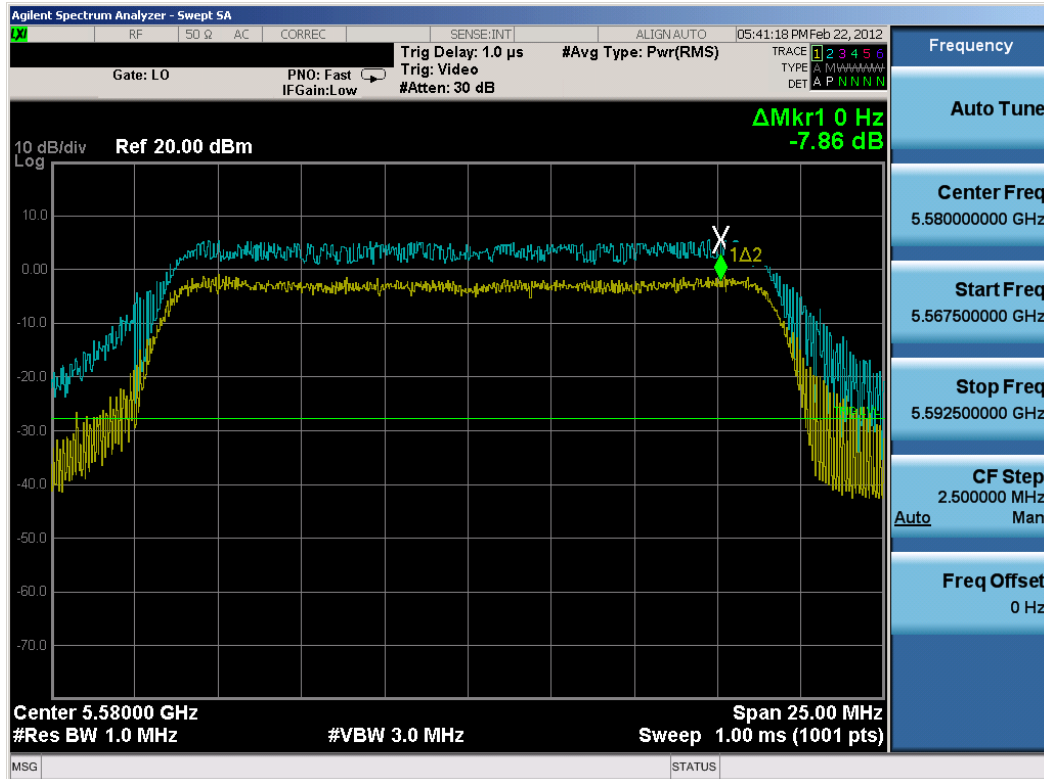

Plot 6-67. Peak Excursion Ratio Plot (802.11n (UNII Band 3) – Ch. 116)

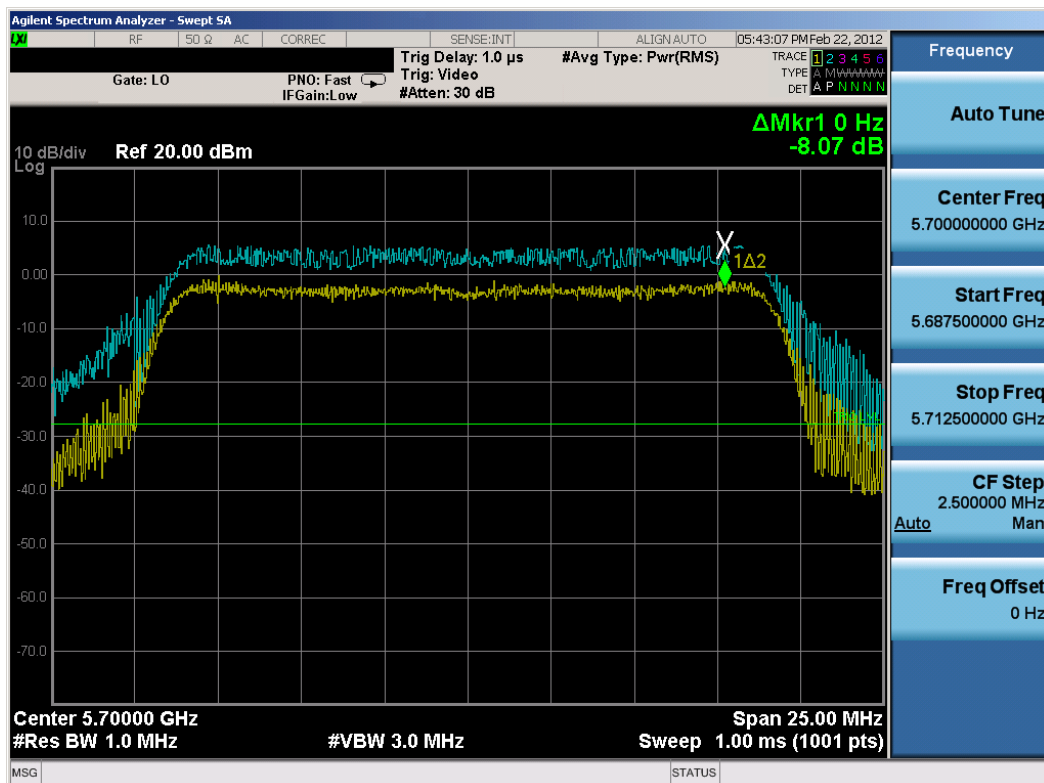


Plot 6-68. Peak Excursion Ratio Plot (802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LSGHT999	 FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 53 of 95


Plot 6-69. Peak Excursion Ratio Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 38)

Plot 6-70. Peak Excursion Ratio Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 46)

FCC ID: A3LSGHT999	 FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 54 of 95

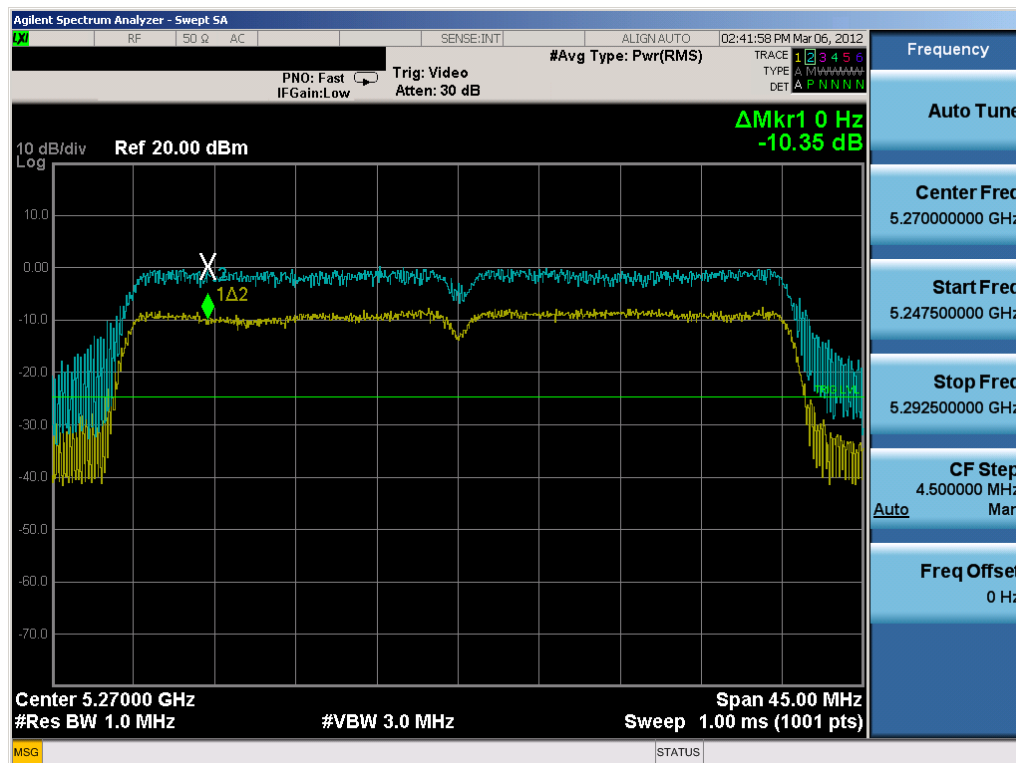


Plot 6-71. Peak Excursion Ratio Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 54)

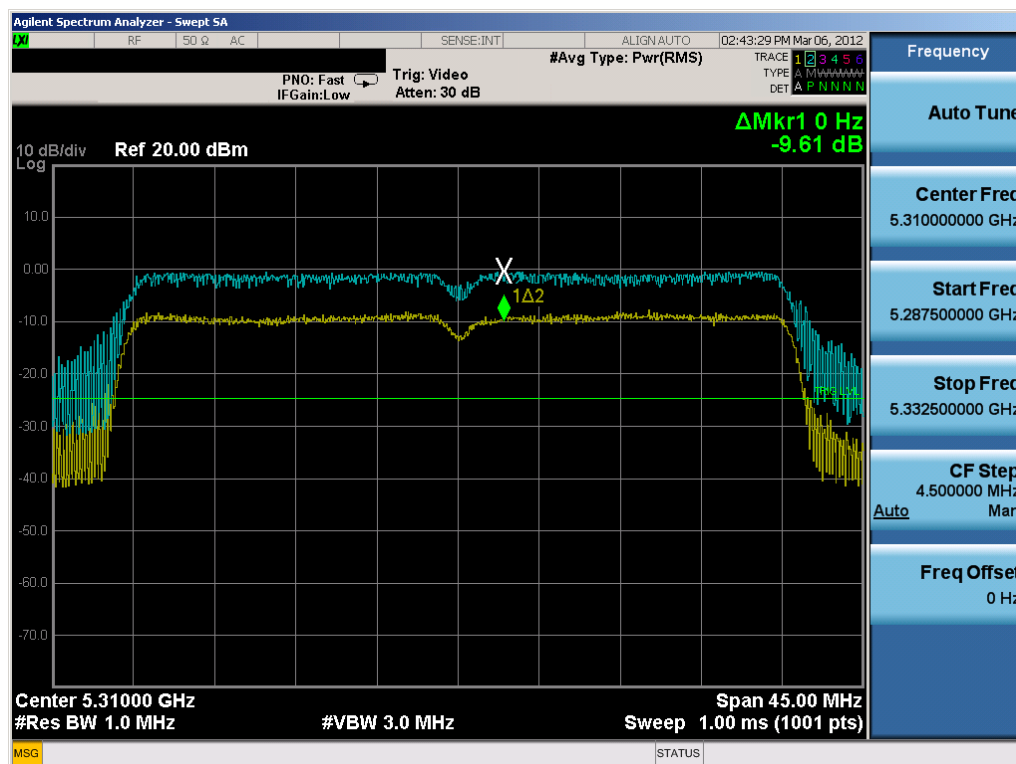

Plot 6-72. Peak Excursion Ratio Plot (802.11n (UNII Band 2 – 40MHz BW) – Ch. 62)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 55 of 95

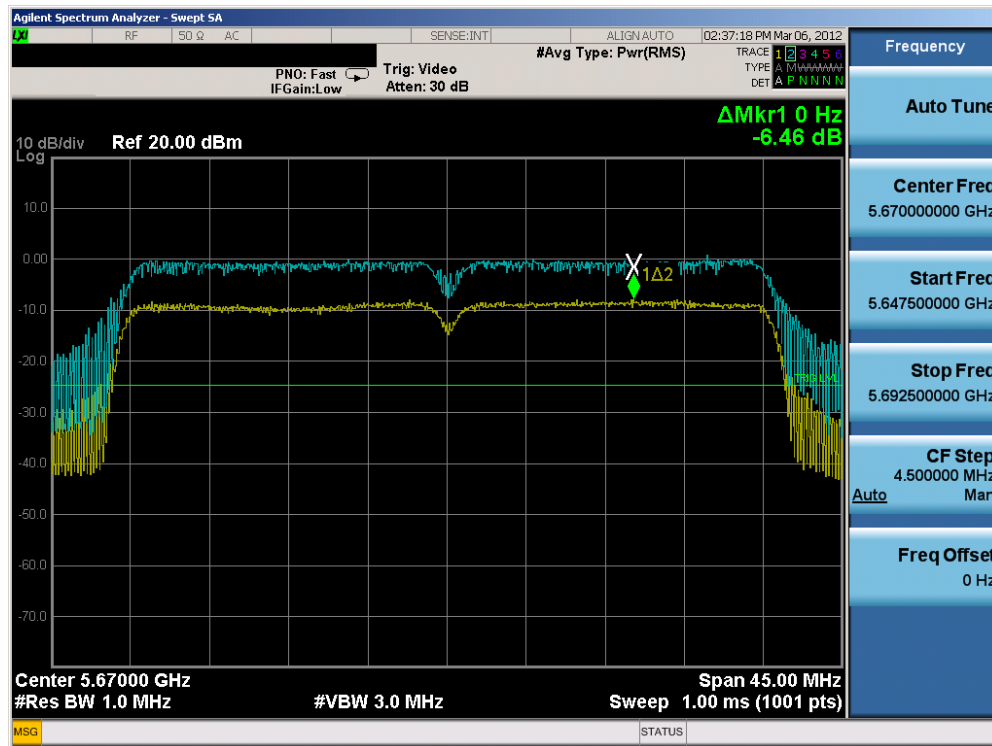

Plot 6-75. Peak Excursion Ratio (802.11n (UNII Band 3 – 40MHz BW) – Ch. 134)

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 57 of 95

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,179,999,800	-200	-0.000004
100 %		- 30	5,180,000,185	185	0.000004
100 %		- 20	5,180,000,191	191	0.000004
100 %		- 10	5,179,999,780	-220	-0.000004
100 %		0	5,180,000,210	210	0.000004
100 %		+ 10	5,180,000,220	220	0.000004
100 %		+ 20	5,180,000,230	230	0.000004
100 %		+ 30	5,179,999,780	-220	-0.000004
100 %		+ 40	5,180,000,190	190	0.000004
100 %		+ 50	5,180,000,180	180	0.000003
115 %	4.26	+ 20	5,179,999,790	-210	-0.000004
BATT. ENDPOINT	3.40	+ 20	5,180,000,200	200	0.000004

Table 6-11. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,259,999,780	-220	-0.000004
100 %		- 30	5,260,000,230	230	0.000004
100 %		- 20	5,260,000,180	180	0.000003
100 %		- 10	5,260,000,190	190	0.000004
100 %		0	5,259,999,790	-210	-0.000004
100 %		+ 10	5,259,999,780	-220	-0.000004
100 %		+ 20	5,260,000,230	230	0.000004
100 %		+ 30	5,260,000,200	200	0.000004
100 %		+ 40	5,260,000,180	180	0.000003
100 %		+ 50	5,260,000,190	190	0.000004
115 %	4.26	+ 20	5,259,999,790	-210	-0.000004
BATT. ENDPOINT	3.40	+ 20	5,260,000,220	220	0.000004

Table 6-12. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 59 of 95	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,499,999,780	-220	-0.000004
100 %		- 30	5,500,000,230	230	0.000004
100 %		- 20	5,499,999,790	-210	-0.000004
100 %		- 10	5,500,000,200	200	0.000004
100 %		0	5,500,000,190	190	0.000003
100 %		+ 10	5,499,999,820	-180	-0.000003
100 %		+ 20	5,500,000,190	190	0.000003
100 %		+ 30	5,499,999,790	-210	-0.000004
100 %		+ 40	5,500,000,220	220	0.000004
100 %		+ 50	5,500,000,230	230	0.000004
115 %	4.26	+ 20	5,500,000,220	220	0.000004
BATT. ENDPOINT	3.40	+ 20	5,499,999,810	-190	-0.000003

Table 6-13. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset	Page 60 of 95	

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

The EUT was tested from 9kHz and up to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurements were taken using RBW = 1MHz and VBW = 10Hz. Peak measurements were taken using RBW = 1MHz, VBW ≥ 3MHz and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-14 per Section 15.209.

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section. All measurements shown in this section were obtained using traditional radiated test methods as defined in C63.10-2009. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 789033 were not used to evaluate this device.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-14. Radiated Limits

Sample Calculation

- o Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- o AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- o Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 61 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5180MHz

Bandwidth: 20MHz

Channel: 36

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
	10360.00	-94.06	Peak	H	40.55	-9.54	43.95	68.20	-24.25
*	15540.00	-135.00	Average	H	49.51	0.00	21.51	53.98	-32.47
*	15540.00	-125.00	Peak	H	49.51	0.00	31.51	73.98	-42.47
*	20720.00	-108.67	Average	H	42.21	-9.54	31.00	53.98	-22.98
*	20720.00	-97.65	Peak	H	42.21	-9.54	42.02	73.98	-31.96
	25900.00	-96.70	Peak	H	42.77	-9.54	43.53	68.20	-24.67

Table 6-15. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 62 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5200MHz

Bandwidth: 20MHz

Channel: 40

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
	10400.00	-94.77	Peak	H	40.59	-9.54	43.28	68.20	-24.92
*	15600.00	-135.00	Average	H	49.61	0.00	21.61	53.98	-32.37
*	15600.00	-125.00	Peak	H	49.61	0.00	31.61	73.98	-42.37
*	20800.00	-108.57	Average	H	42.12	-9.54	31.01	53.98	-22.97
*	20800.00	-95.75	Peak	H	42.12	-9.54	43.83	73.98	-30.15
	26000.00	-96.89	Peak	H	42.81	-9.54	43.38	68.20	-24.82

Table 6-16. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 63 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5240MHz

Bandwidth: 20MHz

Channel: 48

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dBI]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
	10480.00	-93.14	Peak	H	40.67	-9.54	44.99	68.20	-23.21
*	15720.00	-135.00	Average	H	49.79	0.00	21.79	53.98	-32.19
*	15720.00	-125.00	Peak	H	49.79	0.00	31.79	73.98	-42.19
*	20960.00	-107.46	Average	H	41.95	-9.54	31.95	53.98	-22.03
*	20960.00	-98.12	Peak	H	41.95	-9.54	41.29	73.98	-32.69
	26200.00	-96.42	Peak	H	42.70	-9.54	43.74	68.20	-24.46

Table 6-17. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 64 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5260MHz

Bandwidth: 20MHz

Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dBI]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10520.00	-94.26	Peak	H	40.70	-9.54	43.90	68.20	-24.30
* 15780.00	-107.50	Average	H	49.92	-9.54	39.88	53.98	-14.10
* 15780.00	-94.36	Peak	H	49.92	-9.54	53.02	73.98	-20.96
* 21040.00	-106.65	Average	H	42.01	-9.54	32.82	53.98	-21.16
* 21040.00	-96.71	Peak	H	42.01	-9.54	42.76	73.98	-31.22
26300.00	-125.00	Peak	H	42.74	0.00	24.74	68.20	-43.46

Table 6-18. Radiated Measurements @ 1 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m).
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 65 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5280MHz

Bandwidth: 20MHz

Channel: 56

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dBi]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
	10560.00	-92.30	Peak	H	40.73	-9.54	45.89	68.20	-22.31
*	15840.00	-106.43	Average	H	50.08	-9.54	41.11	53.98	-12.86
*	15840.00	-94.90	Peak	H	50.08	-9.54	52.64	73.98	-21.33
*	21120.00	-108.53	Average	H	42.01	-9.54	30.94	53.98	-23.04
*	21120.00	-96.65	Peak	H	42.01	-9.54	42.82	73.98	-31.16
	26400.00	-125.00	Peak	H	42.69	0.00	24.69	68.20	-43.51

Table 6-19. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 66 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5320MHz

Bandwidth: 20MHz

Channel: 64

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dBI]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
*	10640.00	-106.80	Average	H	40.79	-9.54	31.45	53.98	-22.53
*	10640.00	-92.31	Peak	H	40.79	-9.54	45.94	73.98	-28.04
*	15960.00	-108.68	Average	H	50.41	-9.54	39.19	53.98	-14.79
*	15960.00	-96.14	Peak	H	50.41	-9.54	51.73	73.98	-22.25
*	21280.00	-108.41	Average	H	42.01	-9.54	31.06	53.98	-22.92
*	21280.00	-96.96	Peak	H	42.01	-9.54	42.51	73.98	-31.47
	26600.00	-96.19	Peak	H	42.69	-9.54	43.95	68.20	-24.25

Table 6-20. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dB μ V/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 67 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5500MHz

Bandwidth: 20MHz

Channel: 100

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	-105.62	Average	H	40.65	-9.54	32.49	53.98	-21.49
*	11000.00	-92.20	Peak	H	40.65	-9.54	45.91	73.98	-28.07
	16500.00	-94.15	Peak	H	48.81	-9.54	52.12	68.20	-16.08
	22000.00	-96.80	Peak	H	42.32	-9.54	42.98	68.20	-25.22
	27500.00	-125.00	Peak	H	42.66	0.00	24.66	68.20	-43.54

Table 6-21. Radiated Measurements @ 1 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at -135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 68 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5580MHz

Bandwidth: 20MHz

Channel: 116

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	-107.60	Average	H	40.66	-9.54	30.52	53.98	-23.46
*	11200.00	-93.27	Peak	H	40.66	-9.54	44.85	73.98	-29.13
	16740.00	-94.94	Peak	H	48.69	-9.54	51.21	68.20	-16.99
*	22320.00	-106.14	Average	H	42.43	-9.54	33.75	53.98	-20.23
*	22320.00	-96.53	Peak	H	42.43	-9.54	43.36	73.98	-30.62
	27900.00	-125.00	Peak	H	42.70	0.00	24.70	68.20	-43.50

Table 6-22. Radiated Measurements @ 1 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 69 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5700MHz

Bandwidth: 20MHz

Channel: 140

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11400.00	-107.64	Average	H	40.74	-9.54	30.56	53.98	-23.42
*	11400.00	-94.30	Peak	H	40.74	-9.54	43.90	73.98	-30.08
	17100.00	-93.61	Peak	H	47.65	-9.54	51.51	68.20	-16.69
*	22800.00	-112.77	Average	H	42.60	-9.54	27.29	53.98	-26.69
*	22800.00	-100.33	Peak	H	42.60	-9.54	39.73	73.98	-34.25
	28500.00	-125.00	Peak	H	42.68	0.00	24.68	68.20	-43.52

Table 6-23. Radiated Measurements @ 1 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 70 of 95

6.8 Radiated Band Edge Measurements

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5180MHz

Bandwidth: 40MHz

Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5108.40	-105.44	Average	H	36.07	-9.54	28.08	53.98	-25.90
5108.40	-93.09	Peak	H	36.07	-9.54	40.43	73.98	-33.55
5136.30	-103.79	Average	H	36.09	-9.54	29.76	53.98	-24.22
5136.30	-91.34	Peak	H	36.09	-9.54	42.21	73.98	-31.77
5148.70	-103.70	Average	H	36.10	-9.54	29.86	53.98	-24.12
5148.70	-91.32	Peak	H	36.10	-9.54	42.24	73.98	-31.74

Table 6-24. Radiated Restricted Band Measurements at 1-meter (4.5 – 5.15GHz)

NOTES:

- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 71 of 95

Radiated Band Edge Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5320MHz

Bandwidth: 20MHz

Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.00	-103.04	Average	H	36.28	-9.54	30.70	53.98	-23.28
5350.00	-89.47	Peak	H	36.28	-9.54	44.27	73.98	-29.71
5358.00	-102.33	Average	H	36.29	-9.54	31.42	53.98	-22.56
5358.00	-89.23	Peak	H	36.29	-9.54	44.52	73.98	-29.46
5364.00	-102.72	Average	H	36.29	-9.54	31.03	53.98	-22.95
5364.00	-88.19	Peak	H	36.29	-9.54	45.56	73.98	-28.42

Table 6-25. Radiated Restricted Band Measurements at 1-meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBμV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at – 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricteds band specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 72 of 95

Radiated Band Edge Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5500MHz

Bandwidth: 20MHz

Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5457.40	-105.20	Average	H	36.37	-9.54	28.63	53.98	-25.35
5457.40	-92.80	Peak	H	36.37	-9.54	41.03	73.98	-32.95
5459.70	-104.58	Average	H	36.38	-9.54	29.26	53.98	-24.72
5459.70	-92.22	Peak	H	36.38	-9.54	41.62	73.98	-32.36
5469.90	-89.02	Peak	H	36.38	-9.54	44.83	68.20	-23.37

Table 6-26. Radiated Restricted Band Measurements at 1-meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBμV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 73 of 95

Radiated Band Edge Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5700MHz

Bandwidth: 20MHz

Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5726.00	-85.88	Peak	H	36.66	-9.54	48.24	68.20	-19.96
5732.00	-87.11	Peak	H	36.67	-9.54	47.02	68.20	-21.18
5736.00	-86.86	Peak	H	36.67	-9.54	47.27	68.20	-20.93

Table 6-27. Radiated Restricted Band Measurements at 1-meter

NOTES:

- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 74 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5190MHz

Bandwidth: 40MHz

Channel: 38

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10380.00	-92.33	Peak	H	40.57	-9.54	45.70	68.20	-22.50
* 15570.00	-135.00	Average	H	49.56	0.00	21.56	53.98	-32.42
* 15570.00	-125.00	Peak	H	49.56	0.00	31.56	73.98	-42.42
* 20760.00	-106.81	Average	H	42.18	-9.54	32.83	53.98	-21.15
* 20760.00	-97.94	Peak	H	42.18	-9.54	41.70	73.98	-32.28
25950.00	-125.00	Peak	H	42.79	0.00	24.79	68.20	-43.41

Table 6-28. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 75 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5230MHz

Bandwidth: 40MHz

Channel: 46

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10460.00	-90.88	Peak	H	40.65	-9.54	47.23	68.20	-20.97
* 15690.00	-135.00	Average	H	49.74	0.00	21.74	53.98	-32.24
* 15690.00	-125.00	Peak	H	49.74	0.00	31.74	73.98	-42.24
* 20920.00	-105.90	Average	H	42.00	-9.54	33.55	53.98	-20.43
* 20920.00	-98.13	Peak	H	42.00	-9.54	41.32	73.98	-32.66
26150.00	-125.00	Peak	H	42.73	0.00	24.73	68.20	-43.47

Table 6-29. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 76 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5270MHz

Bandwidth: 40MHz

Channel: 54

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10540.00	-92.54	Peak	H	40.72	-9.54	45.63	68.20	-22.57
* 15810.00	-104.69	Average	H	50.00	-9.54	42.77	53.98	-11.21
* 15810.00	-95.55	Peak	H	50.00	-9.54	51.91	73.98	-22.07
* 21080.00	-106.24	Average	H	42.01	-9.54	33.23	53.98	-20.75
* 21080.00	-96.47	Peak	H	42.01	-9.54	43.00	73.98	-30.98
26350.00	-125.00	Peak	H	42.71	0.00	24.71	68.20	-43.49

Table 6-30. Radiated Measurements @ 1 meter

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 77 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5310MHz

Bandwidth: 40MHz

Channel: 62

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	10620.00	-105.64	Average	H	40.78	-9.54	32.60	53.98	-21.38
*	10620.00	-91.52	Peak	H	40.78	-9.54	46.72	73.98	-27.26
*	15930.00	-135.00	Average	H	50.33	0.00	22.33	53.98	-31.65
*	15930.00	-125.00	Peak	H	50.33	0.00	32.33	73.98	-41.65
*	21240.00	-106.53	Average	H	42.02	-9.54	32.95	53.98	-21.03
*	21240.00	-96.52	Peak	H	42.02	-9.54	42.96	73.98	-31.02
	26550.00	-125.00	Peak	H	42.63	0.00	24.63	68.20	-43.57

Table 6-31. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 78 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5510MHz

Bandwidth: 40MHz

Channel: 102

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11020.00	-105.00	Average	H	40.65	-9.54	33.11	53.98	-20.87
*	11020.00	-93.17	Peak	H	40.65	-9.54	44.94	73.98	-29.04
	16530.00	-95.44	Peak	H	48.80	-9.54	50.82	68.20	-17.38
*	22040.00	-105.16	Average	H	42.35	-9.54	34.65	53.98	-19.33
*	22040.00	-96.76	Peak	H	42.35	-9.54	43.05	73.98	-30.93
	27550.00	-125.00	Peak	H	42.66	0.00	24.66	68.20	-43.54

Table 6-32. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 79 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5550MHz

Bandwidth: 40MHz

Channel: 110

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11100.00	-106.47	Average	H	40.66	-9.54	31.66	53.98	-22.32
11100.00	-93.93	Peak	H	40.66	-9.54	44.20	73.98	-29.78
16650.00	-94.30	Peak	H	48.64	-9.54	51.80	68.20	-16.40
22360.00	-103.21	Average	H	42.44	-9.54	36.69	53.98	-17.29
22360.00	-96.34	Peak	H	42.44	-9.54	43.56	73.98	-30.42
27910.00	-125.00	Peak	H	42.70	0.00	24.70	68.20	-43.50

Table 6-33. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 80 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5670MHz

Bandwidth: 40MHz

Channel: 134

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11340.00	-106.82	Average	H	40.71	-9.54	31.35	53.98	-22.62
*	11340.00	-94.38	Peak	H	40.71	-9.54	43.79	73.98	-30.18
	17010.00	-93.45	Peak	H	48.03	-9.54	52.03	68.20	-16.17
*	22680.00	-106.52	Average	H	42.57	-9.54	33.50	53.98	-20.48
*	22680.00	-97.45	Peak	H	42.57	-9.54	42.57	73.98	-31.41
	28350.00	-125.00	Peak	H	42.69	0.00	24.69	68.20	-43.51

Table 6-34. Radiated Measurements @ 1 meter

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz (68.2dBμV/m).
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
7. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
8. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 81 of 95

6.9 Radiated Band Edge Measurements

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5190MHz

Bandwidth: 40MHz

Channel: 38

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4802.20	-94.95	Average	V	36.07	-9.54	38.57	53.98	-15.41
4802.20	-90.15	Peak	V	36.07	-9.54	43.37	73.98	-30.61
5135.70	-97.28	Average	V	36.09	-9.54	36.27	53.98	-17.71
5135.70	-90.07	Peak	V	36.09	-9.54	43.48	73.98	-30.50
5144.80	-87.75	Average	V	36.10	-9.54	45.81	53.98	-8.17
5144.80	-72.97	Peak	V	36.10	-9.54	60.59	73.98	-13.39

Table 6-35. Radiated Restricted Band Measurements at 1-meter (4.5 – 5.15GHz)

NOTES:

- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μ V/m (54dB μ V/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 82 of 95

Radiated Band Edge Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5310MHz

Bandwidth: 40MHz

Channel: 62

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5351.00	-83.26	Average	V	36.28	-9.54	50.48	53.98	-3.50
5351.00	-69.77	Peak	V	36.28	-9.54	63.97	73.98	-10.01
5362.00	-94.76	Average	V	36.29	-9.54	38.99	53.98	-14.99
5362.00	-78.65	Peak	V	36.29	-9.54	55.10	73.98	-18.88
5365.00	-97.85	Average	V	36.29	-9.54	35.90	53.98	-18.08
5365.00	-86.21	Peak	V	36.29	-9.54	47.54	73.98	-26.44

Table 6-36. Radiated Restricted Band Measurements at 1-meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBμV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at – 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricteds band specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 83 of 95

Radiated Band Edge Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5510MHz

Bandwidth: 40MHz

Channel: 102

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5446.50	-98.36	Average	V	36.36	-9.54	35.47	53.98	-18.51
5446.50	-83.41	Peak	V	36.36	-9.54	50.42	73.98	-23.56
5459.20	-91.22	Average	V	36.37	-9.54	42.62	53.98	-11.36
5459.20	-76.74	Peak	V	36.37	-9.54	57.10	73.98	-16.88
5469.90	-65.82	Peak	V	36.38	-9.54	68.03	68.20	-0.17

Table 6-37. Radiated Restricted Band Measurements at 1-meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)

NOTES:

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz (68.2dBμV/m) EIRP limit specified in §15.407.
2. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμV/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 84 of 95

Radiated Band Edge Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n

Worst Case Transfer Rate: 6.5/7.2 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5670MHz

Bandwidth: 40MHz

Channel: 134

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5727.00	-70.64	Peak	V	36.66	-9.54	63.48	68.20	-4.72
5737.00	-79.64	Peak	V	36.67	-9.54	54.49	68.20	-13.71
5739.00	-81.49	Peak	V	36.67	-9.54	52.64	68.20	-15.56

Table 6-38. Radiated Restricted Band Measurements at 1-meter


NOTES:

- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz and VBW = 10Hz ("Method VB") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.


FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 85 of 95

6.10 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

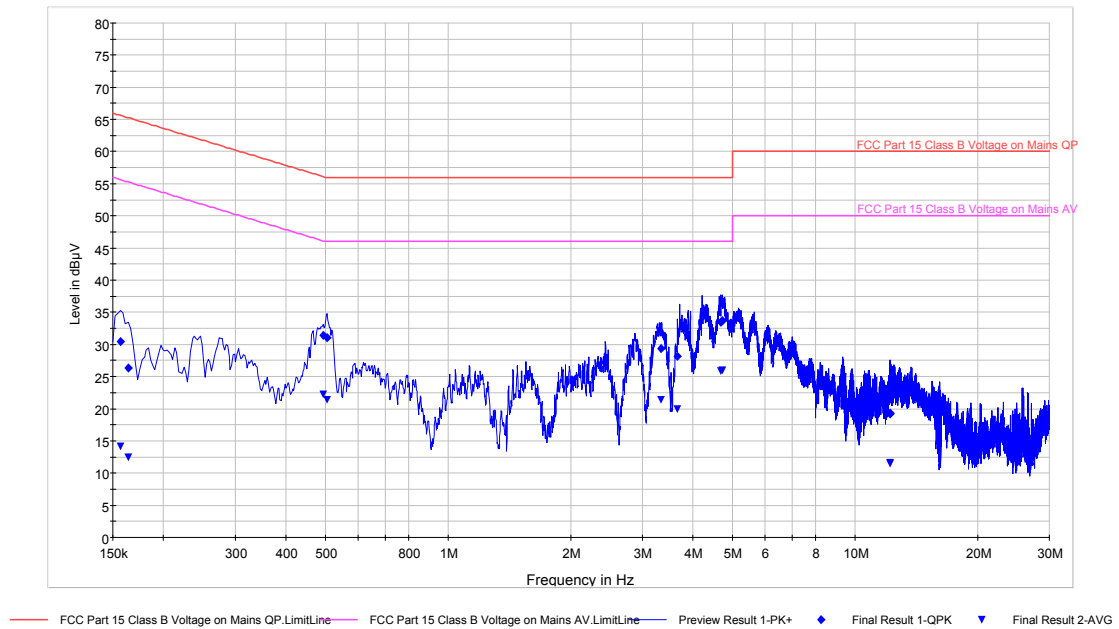

Plot 6-76. Line Conducted Plot with 802.11a (UNII Band 1) – Line 1

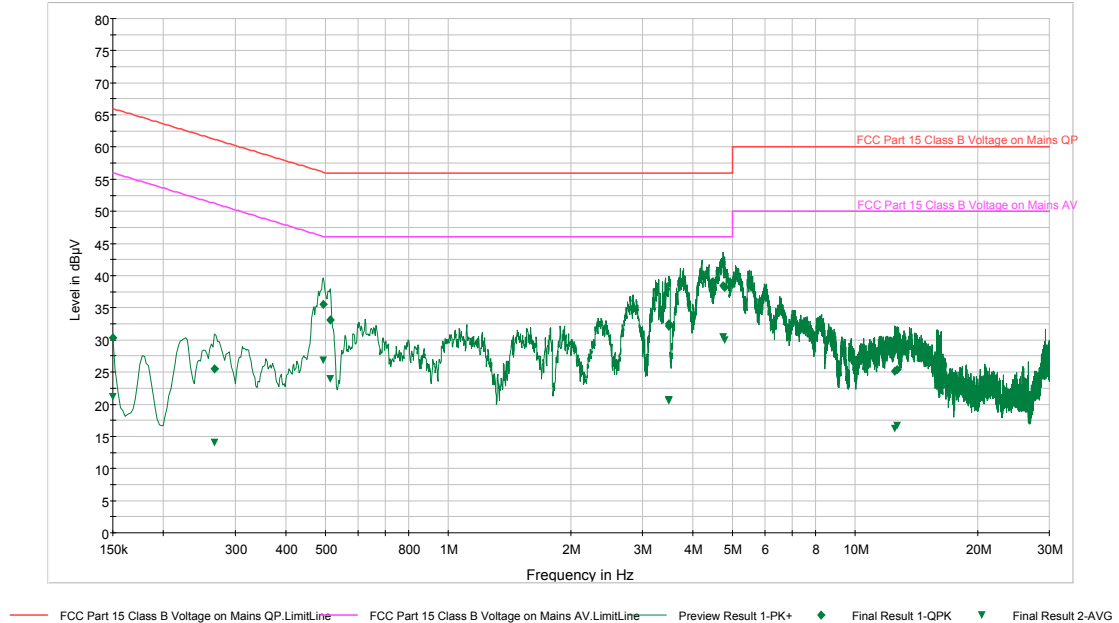

Plot 6-77. Line Conducted Plot with 802.11a (UNII Band 1) – Line N

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 86 of 95

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line 1 = Phase; Line N = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LSGHT999	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 87 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

Frequency (MHz)	Line	Factor (dB)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit	Margin
0.157	L1	0.2	30.50	65.6	35.10	14.10	55.60	41.50
0.164	L1	0.2	26.40	65.3	38.90	12.40	55.30	42.90
0.494	L1	0.1	31.40	56.1	24.70	22.20	46.10	23.90
0.503	L1	0.1	31.00	56.0	25.00	21.40	46.00	24.60
3.334	L1	0.2	29.40	56.0	26.60	21.40	46.00	24.60
3.665	L1	0.2	28.20	56.0	27.80	20.00	46.00	26.00
4.679	L1	0.2	33.40	56.0	22.60	25.80	46.00	20.20
4.724	L1	0.2	33.70	56.0	22.30	26.00	46.00	20.00
12.167	L1	0.4	19.20	60.0	40.80	11.50	50.00	38.50
12.212	L1	0.4	19.30	60.0	40.70	11.60	50.00	38.40
0.150	N	0.3	30.40	66.0	35.60	21.20	56.00	34.80
0.267	N	0.2	25.50	61.2	35.70	14.00	51.20	37.20
0.494	N	0.1	35.50	56.1	20.60	26.80	46.10	19.30
0.512	N	0.1	33.10	56.0	22.90	24.00	46.00	22.00
3.487	N	0.2	32.10	56.0	23.90	20.60	46.00	25.40
3.491	N	0.2	32.50	56.0	23.50	20.70	46.00	25.30
4.738	N	0.2	38.50	56.0	17.50	30.50	46.00	15.50
4.776	N	0.2	38.20	56.0	17.80	29.90	46.00	16.10
12.536	N	0.5	25.10	60.0	34.90	16.10	50.00	33.90
12.680	N	0.5	25.40	60.0	34.60	16.60	50.00	33.40

Table 6-39. Line Conducted Data with 802.11a (UNII Band 1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.


FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 88 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

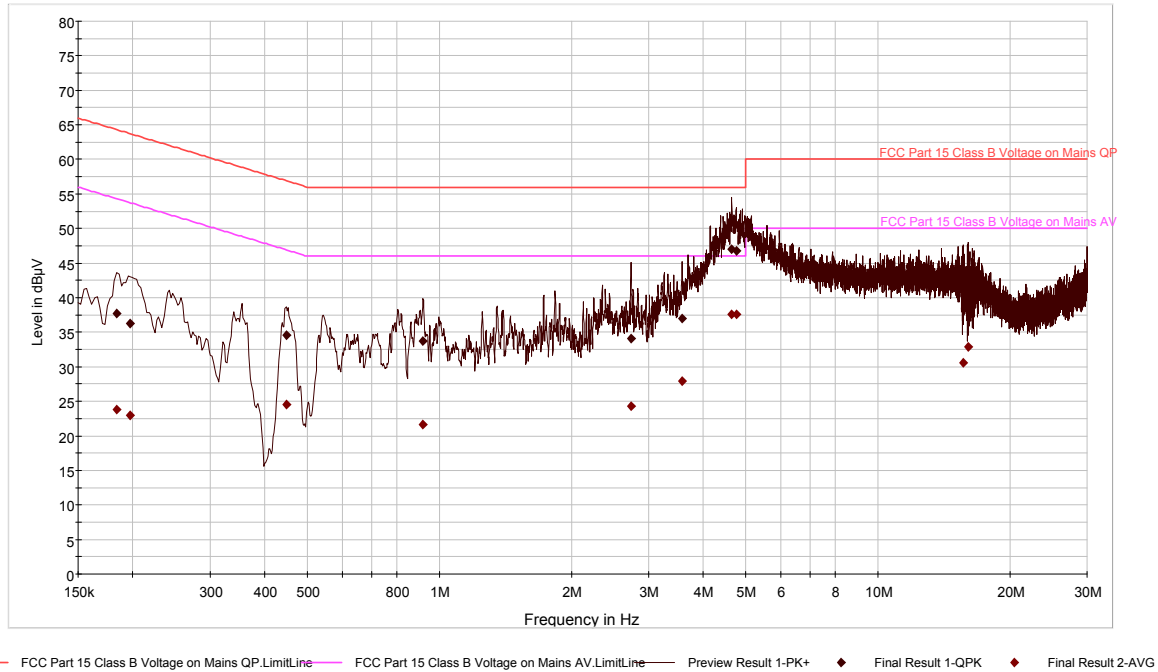

Plot 6-78. Line Conducted Plot with 802.11a (UNII Band 2) – Line 1

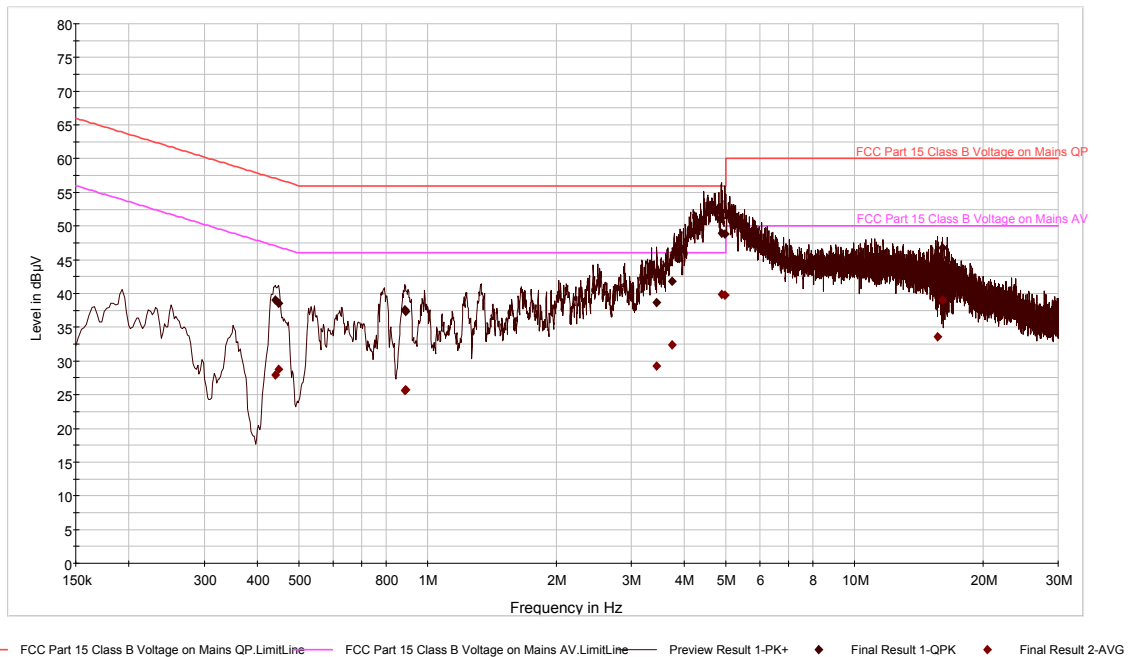

Plot 6-79. Line Conducted Plot with 802.11a (UNII Band 2) – Line N

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 89 of 95

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line 1 = Phase; Line N = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 90 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

Frequency (MHz)	Line	Factor (dB)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit	Margin
0.184	L1	0.2	37.70	64.3	26.60	23.90	54.30	30.40
0.197	L1	0.2	36.20	63.7	27.50	22.90	53.70	30.80
0.447	L1	0.1	34.60	56.9	22.30	24.60	46.90	22.30
0.917	L1	0.1	33.70	56.0	22.30	21.60	46.00	24.40
2.738	L1	0.2	34.10	56.0	21.90	24.20	46.00	21.80
3.579	L1	0.2	37.00	56.0	19.00	27.90	46.00	18.10
4.643	L1	0.2	47.10	56.0	8.90	37.60	46.00	8.40
4.751	L1	0.2	46.80	56.0	9.20	37.60	46.00	8.40
15.635	L1	0.6	43.70	60.0	16.30	30.50	50.00	19.50
16.091	L1	0.6	43.60	60.0	16.40	32.90	50.00	17.10
0.440	N	0.1	39.00	57.1	18.10	27.90	47.10	19.20
0.447	N	0.1	38.50	56.9	18.40	28.80	46.90	18.10
0.884	N	0.1	37.60	56.0	18.40	25.60	46.00	20.40
0.888	N	0.1	37.30	56.0	18.70	25.80	46.00	20.20
3.444	N	0.2	38.60	56.0	17.40	29.20	46.00	16.80
3.746	N	0.2	41.80	56.0	14.20	32.30	46.00	13.70
4.877	N	0.2	48.90	56.0	7.10	39.80	46.00	6.20
4.972	N	0.2	48.80	56.0	7.20	39.70	46.00	6.30
15.648	N	0.6	43.50	60.0	16.50	33.60	50.00	16.40
16.096	N	0.6	46.80	60.0	13.20	39.00	50.00	11.00

Table 6-40. Line Conducted Data with 802.11a (UNII Band 2)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.


FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 91 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

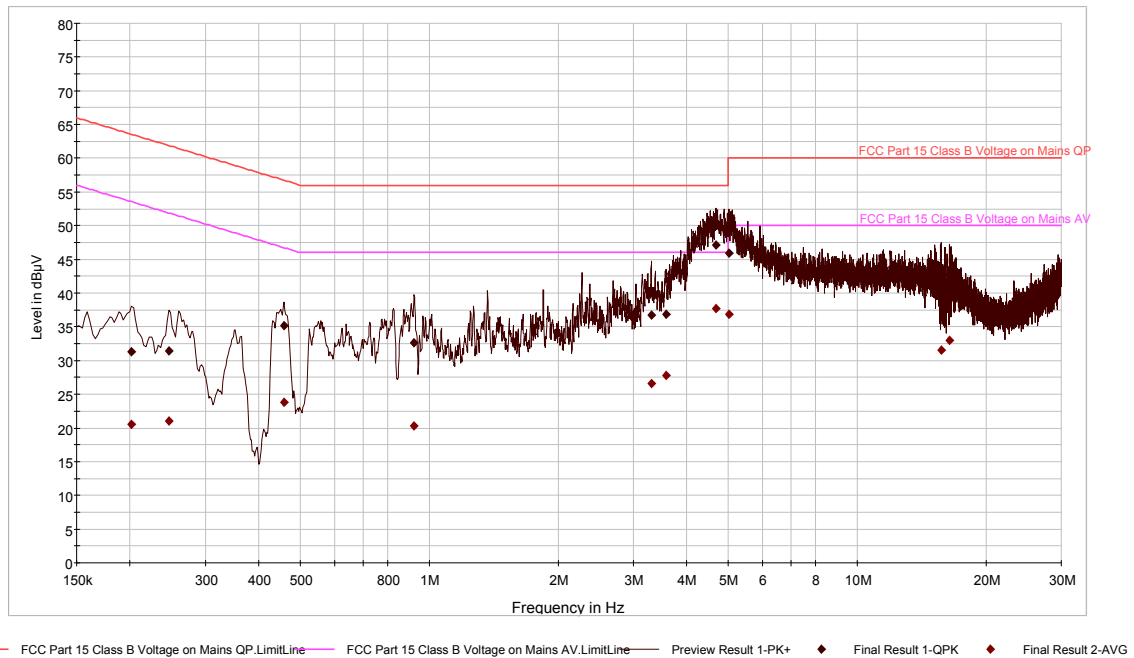

Plot 6-80. Line Conducted Plot with 802.11a (UNII Band 3) – Line 1

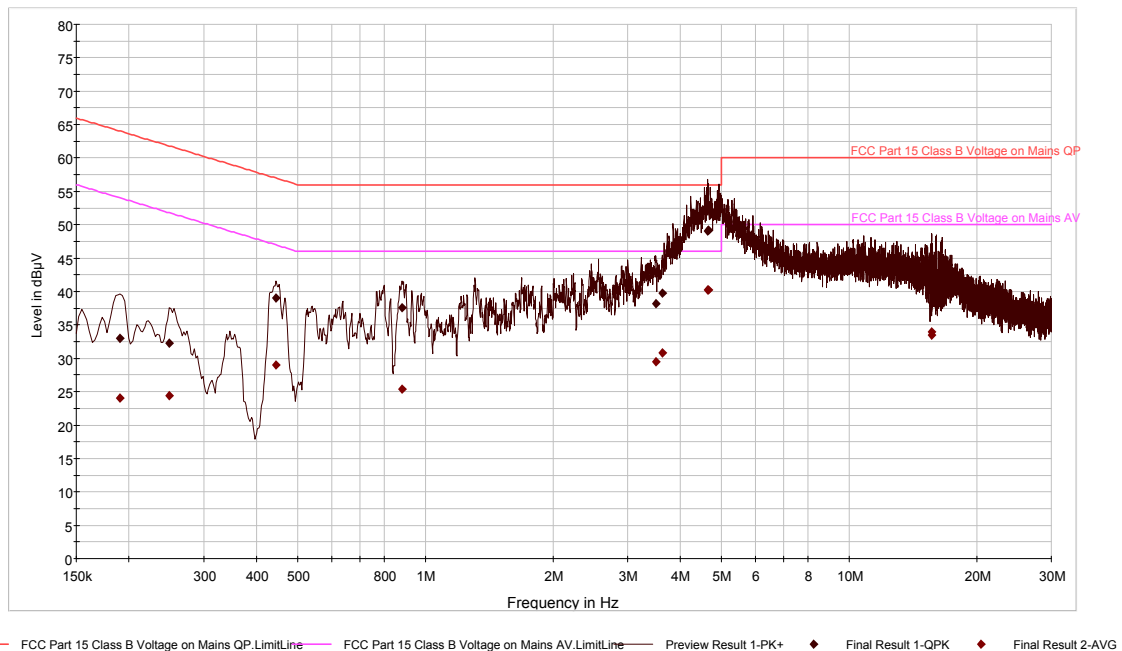

Plot 6-81. Line Conducted Plot with 802.11a (UNII Band 3) – Line N

FCC ID: A3LSGHT999	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 92 of 95

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line 1 = Phase; Line N = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 93 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

Frequency (MHz)	Line	Factor (dB)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit	Margin
0.202	L1	0.2	31.20	63.5	32.30	20.60	53.50	32.90
0.247	L1	0.1	31.50	61.9	30.40	21.00	51.90	30.90
0.458	L1	0.1	35.20	56.7	21.50	23.90	46.70	22.80
0.922	L1	0.1	32.70	56.0	23.30	20.30	46.00	25.70
3.302	L1	0.2	36.70	56.0	19.30	26.60	46.00	19.40
3.575	L1	0.2	36.90	56.0	19.10	27.80	46.00	18.20
4.684	L1	0.2	47.10	56.0	8.90	37.70	46.00	8.30
5.019	L1	0.2	45.90	60.0	14.10	36.80	50.00	13.20
15.738	L1	0.6	42.20	60.0	17.80	31.60	50.00	18.40
16.454	L1	0.6	42.80	60.0	17.20	33.00	50.00	17.00
0.191	N	0.2	33.00	64.0	31.00	24.00	54.00	30.00
0.249	N	0.2	32.20	61.8	29.60	24.40	51.80	27.40
0.445	N	0.1	39.00	57.0	18.00	29.00	47.00	18.00
0.881	N	0.1	37.60	56.0	18.40	25.40	46.00	20.60
3.494	N	0.2	38.20	56.0	17.80	29.50	46.00	16.50
3.624	N	0.2	39.80	56.0	16.20	30.80	46.00	15.20
4.634	N	0.2	49.10	56.0	6.90	40.30	46.00	5.70
4.650	N	0.2	49.10	56.0	6.90	40.30	46.00	5.70
15.653	N	0.6	44.80	60.0	15.20	33.90	50.00	16.10
15.657	N	0.6	45.10	60.0	14.90	33.40	50.00	16.60

Table 6-41. Line Conducted Data with 802.11a (UNII Band 3)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 94 of 95

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSGHT999** is in compliance with Part 15E of the FCC Rules and RSS-210 of the Industry Canada Rules.

FCC ID: A3LSGHT999		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204300613.A3L	Test Dates: Feb. 22 - Mar. 11, 2012	EUT Type: Portable Handset		Page 95 of 95