

EMC TEST REPORT

Project No.	LBE20122367	Issue No.	None
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	May 3, 2012	
EUT	Type of device	Class B computing devices peripheral	
	Equipment authorization	☐ Declaration of Conformity ☒ Certification ☐ Verification	
	FCC ID	A3LSGHT999	
	Kind of product	Mobile Phone	
	Model No.	SGH-T999	
	Variant Model No.	Refer to clause 3.5	
	Manufacturer	SEHZ Samsung Telecommunication Co., Ltd. 516229 Chen jiang Town Huizhou City.guangdong Province. China. 516229	
Applied Standards		FCC Part 15, Subpart B, Class B / ANSI C63.4-2003	
Test Period		May 3, 2012 ~ May 4, 2012	
Issue date		May 8, 2012	
Test result : Complied The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
Tested by : Young-Jin Kim 		Reviewed by : Tae-Young Jang 	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.			
 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-so, 443-742, Republic of Korea Tel: 82 31 279 1750, Fax: 82 31 279 1745			

Table of contents

1. Summary of test results

1.1 Emission	3
--------------------	---

2. General Information

2.1 Test facility	3
-------------------------	---

3. Test configuration

3.1 Test Peripherals	3
3.2 EUT operating mode	4
3.3 Details of Sampling	4
3.4 Used cable description	4
3.5 EUT Description	5
3.6 Clock Frequencies	5
3.7 Test configuration and condition	6
3.8 Measurement uncertainty	6

4. Result of individual tests

4.1 Conducted disturbance	7
4.2 Radiated disturbance	10

1. Summary of test results

1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result	Remarks
☒	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2003	Complied	Meets Class B Limit
☒	Radiated Disturbance		Complied	Meets Class B Limit

2. General Information

2.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation Characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

3. Test Setup configuration

3.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Description	Model No.	Serial No.	Manufacturer	FCC ID / DoC
Mobile Phone	SGH-T999	-	SAMSUNG	A3LSGHT999
Battery	EB-L1G6LLA	AAbC330sS/2-B	SAMSUNG	-
Headset	EHS64AVFWE	-	SAMSUNG	-
USB Cable	UF/ECC1DU6BBE	-	SAMSUNG	-
Desk-Top Computer	DCME	8JBVSBX	DELL	DoC
LCD Monitor	GH15LS	N719HVELA11890L	SAMSUNG	DoC
Mouse	MOARUO	MS-S5-AR03-01	SAMSUNG	DoC
Keyboard	GP-K5000U	15000099	SAMSUNG	DoC
Router	3CGS U08	AB/ 9XRQAC0024825	3COM	DoC

3.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
-------------------------	-------------------------------

3.3 Details of Sampling

Customer selected, single unit.

3.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected;

Connected cable	Length [m]	Shielded [Y/N]	Note
Data Cable	1.5	Yes	From EUT to Desk-Top Computer
Headset	1.2	No	For EUT
Power	1.8	No	For Desk-Top Computer
Power	1.8	No	For LCD Monitor
RGB	1.8	Yes	From Desk-Top Computer to LCD Monitor
USB	1.8	Yes	From Desk-Top Computer to Mouse
USB	1.5	Yes	From Desk-Top Computer to Keyboard
LAN cable	1.5	No	From Desktop PC to Router
LAN cable	1.5	No	From Router to Building Network

3.5 EUT Description

1. The following features describe EUT represented by this report:

Item	Specification	
Operating Temperature (°C)	-20 ~ +50	
Operating Humidity (%)	0 ~ 95	
Frequency Range	US PCS/FDD 2	TX : 1 850 ~ 1 910 MHz RX : 1 930 ~ 1 990 MHz
	GSM 850/FDD 5	TX : 824 ~ 849 MHz RX : 869 ~ 894 MHz
	WCDMA/FDD 4	TX: 1 710 ~ 1 755 MHz RX: 2 110 ~ 2 155 MHz

2. The variant models

- None

3.6 Clock Frequencies

Kind of Clocks	Frequency [MHz]
AP	1 500

3.7 Test configuration and condition

The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested.

This program was contained on the PC hard disk drive.

Once loaded, the program sequentially exercises each system component in turn.

The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific.

- Test Voltage : AC 120 V, 60 Hz

3.8 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

3.8.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	± 3.03 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	± 4.61 dB
	Vertical	± 4.60 dB
Radiated Disturbance (1 GHz ~ 6 GHz)		± 4.09 dB

4. Results of individual test

4.1 Conducted disturbance

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports

Frequency range Limits MHz	Resolution Bandwidth	Limits dB(μV)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

4.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E4I-093	Test Receiver	ESCI	R&S	100086	2011-11-11	12
E3I-050	LISN	ESH3-Z5	R&S	100263	2011-10-12	12
E3I-259	LISN	ENV216	R&S	101369	2011-10-11	12

4.1.2 Temperature and humidity condition

Test date	2012-05-03	Test engineer	Young-Jin Kim
Climate condition	Ambient temperature	23.0 °C	Limit (15.0 to 35.0) °C
	Relative humidity	46.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.0 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

4.1.3 Test results

- Operating Mode 1: AC Mains

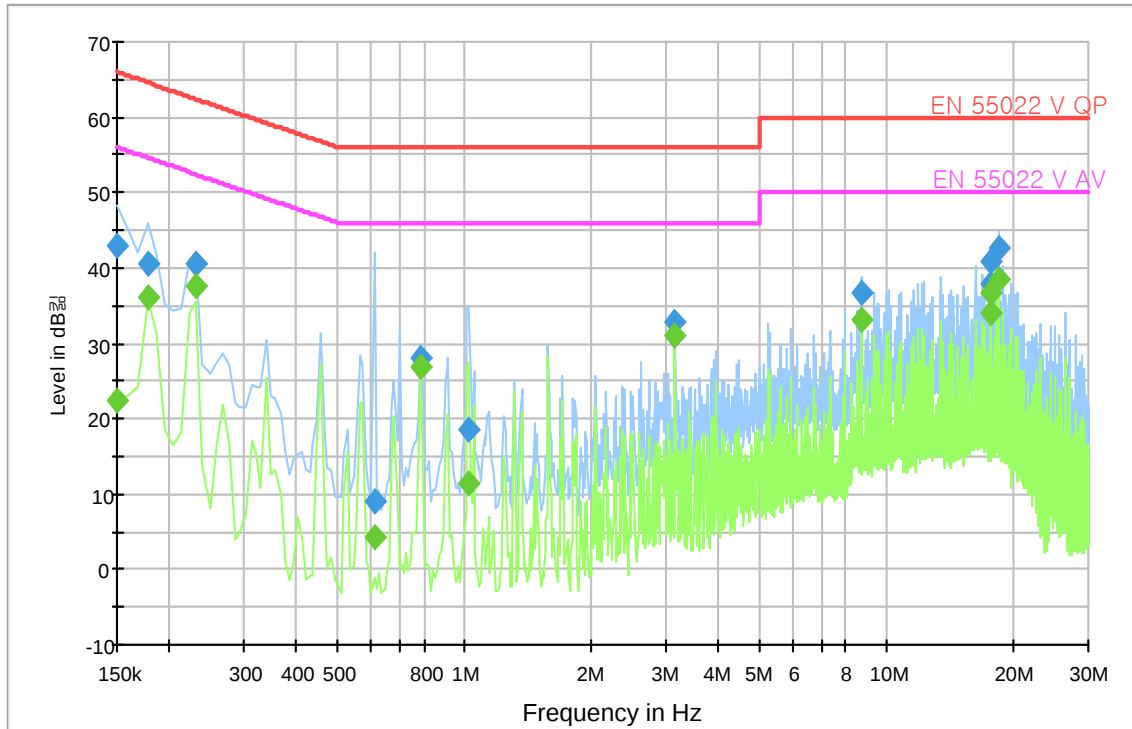

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak final measurement results table

Frequency (MHz)	Level (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150	42.9	L1	9.9	23.10	66.00
0.177	40.7	L1	10.2	24.00	64.60
0.231	40.5	N	10.0	22.00	62.40
0.609	9.0	N	10.0	47.00	56.00
0.789	28.1	L1	9.9	27.90	56.00
1.023	18.4	N	9.8	37.60	56.00
3.147	32.8	L1	9.8	23.20	56.00
8.718	36.7	L1	9.8	23.30	60.00
17.574	37.8	N	10.0	22.20	60.00
17.691	40.8	N	10.0	19.20	60.00
18.366	42.5	N	10.0	17.50	60.00

Average final measurement results table

Frequency (MHz)	Level (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150	22.5	L1	9.9	33.50	56.00
0.177	36.0	L1	10.2	18.60	54.60
0.231	37.6	N	10.0	14.80	52.40
0.609	4.4	N	10.0	41.60	46.00
0.789	27.0	L1	9.9	19.00	46.00
1.023	11.5	N	9.8	34.50	46.00
3.147	31.0	L1	9.8	15.00	46.00
8.718	33.1	L1	9.8	16.90	50.00
17.574	33.9	N	10.0	16.10	50.00
17.691	36.8	N	10.0	13.20	50.00
18.366	38.5	N	10.0	11.50	50.00

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)
 Margin (QP and/or AV) = Limit – Level (QP and/or AV)
 QP = Quasi-Peak, AV = Average

4.2 Radiated disturbance

Of those disturbances above ($L - 20\text{dB}$), where L is the limit level in logarithmic units, record at least the disturbance levels and the frequencies of the six highest disturbances.

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution bandwidth	Video bandwidth	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120 kHz	300 kHz	Continuous

Measurements within 20 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detectors.

Limits for radiated disturbance of ITE at a measuring distance of 3 m

Frequency range Limits [MHz]	Field Strength	
	$\mu\text{V/m}$	$\text{dB}(\mu\text{V/m})$
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

Peak/Average measurements were made over the changeable frequency range 1GHz to 40GHz or 5th in accordance with internal maximum operating frequency at a measurement distance of 3m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution bandwidth	Video bandwidth	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1 MHz (PK / AV)	3 MHz (PK) 10 Hz (AV)	Continuous

Limits for radiated disturbance of ITE at a measurement distance of 3 m

Class	Limits [$\text{dB}(\mu\text{V/m})$]	
	Peak	Average
A	80	60
B	74	54
Average limit 500, $20 \log 500 = 53.979 \text{ dB} \approx 54 \text{ dB}$		

Measurements within 20 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using peak and average detectors.

Results checked manually; and points close to the limit line were re-measured.

4.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-263	BILOG Antenna	CBL 6143A	TESEQ	30262	2011-08-30	24
E3I-142	EMI Test Receiver	ESI-26	R&S	100019	2011-06-16	12
E3I-170	Horn Antenna	HF906	R&S	100028	2010-10-04	24
E3I-217	Preamplifier	310N	Sonoma	282363	2012-02-03	12


4.2.2 Temperature and humidity condition

Test date	2012-05-04	Test engineer	Young-Jin Kim
Climate condition	Ambient temperature	21.5 °C	Limit (15.0 to 35.0) °C
	Relative humidity	44.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.2 kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber(SAC7)		

4.2.3 Test results

☐ Operating Mode 1

- Frequency range: 30 ~ 1 000 MHz

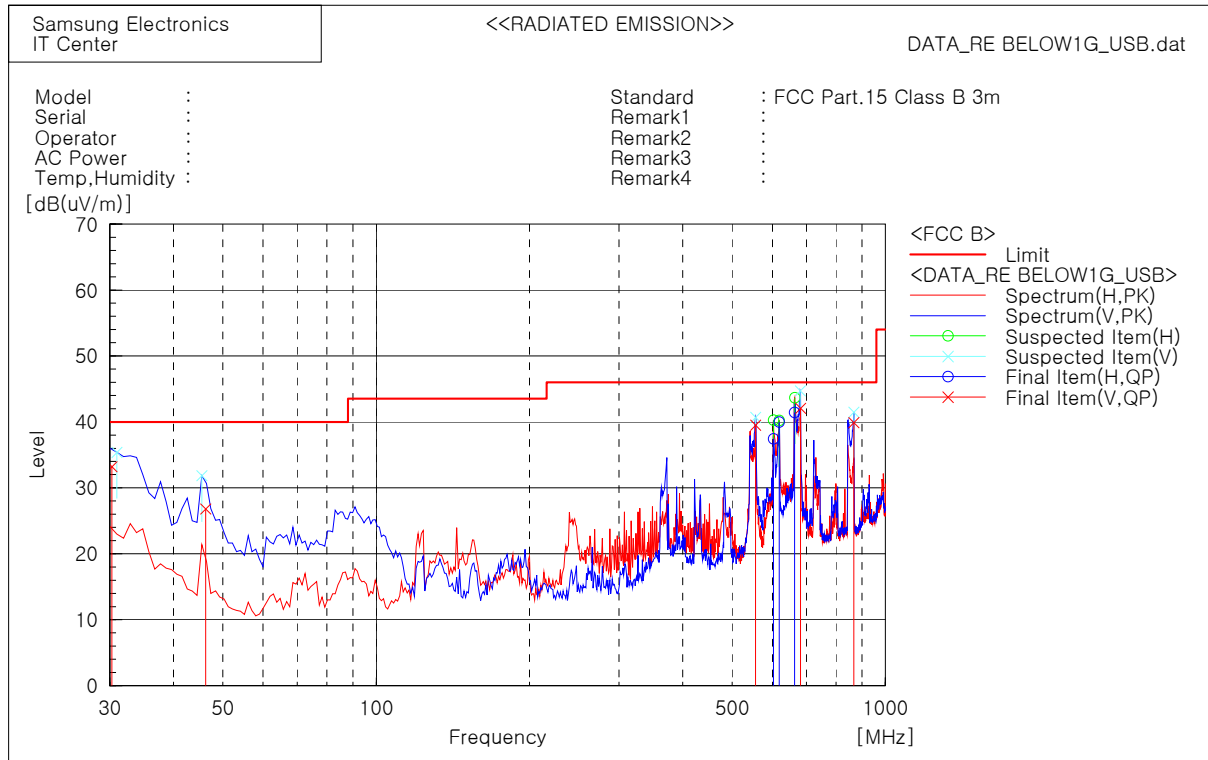

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.266	V	41.5	-8.3	33.2	40.0	6.8	105.0	27.0
2	46.255	V	42.8	-16.0	26.8	40.0	13.2	105.0	241.0
3	556.308	V	49.3	-9.8	39.5	46.0	6.5	203.0	187.0
4	602.701	H	46.9	-9.5	37.4	46.0	8.6	106.0	192.0
5	618.597	H	49.4	-9.4	40.0	46.0	6.0	105.0	199.0
6	662.943	H	50.6	-9.2	41.4	46.0	4.6	106.0	207.0
7	681.074	V	51.0	-8.9	42.1	46.0	3.9	201.0	151.0
8	866.498	V	46.8	-6.9	39.9	46.0	6.1	107.0	220.0

Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Result (QP)

QP = Quasi-Peak

□ Operating Mode 1

- Frequency range: 1 000 ~ 6 000 MHz

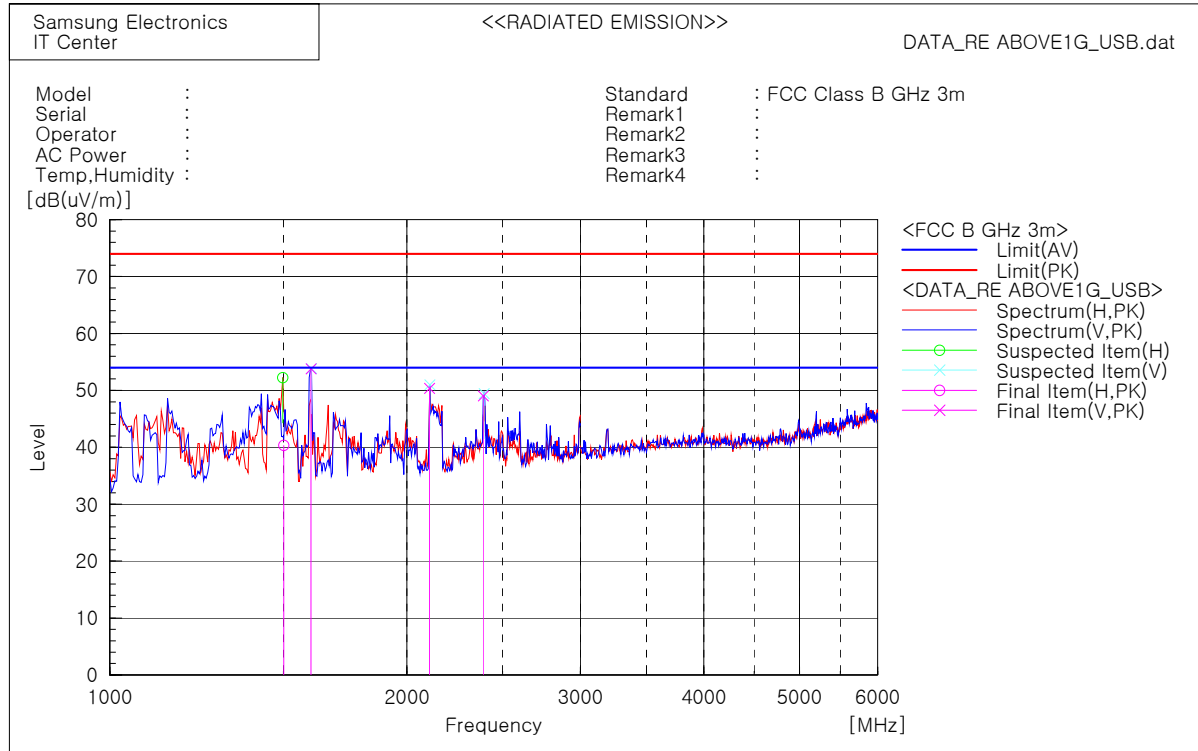

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1500.962	H	56.7	-16.3	40.4	74.0	33.6	100.0	52.0
2	1599.319	V	70.4	-16.6	53.8	74.0	20.2	100.0	40.0
3	2108.458	V	63.8	-13.4	50.4	74.0	23.6	100.0	199.0
4	2390.301	V	61.8	-12.8	49.0	74.0	25.0	100.0	321.0

Note1) Representative operating modes were selected by customer and any emissions that do NOT exceed Average limit were not tested with average detector mode.

Note2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 ~ 4 meters

Result (AV) = Reading (AV) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (AV) = Limit - Result (AV)

AV = Average