



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 24 SUBPART CERTIFICATION REPORT

Model Tested: **SGH-X700**
Additional Model : **SGH-X708**
FCC ID (Requested): **A3LSGHX700**
Report No: **FC-107-R1**
Job No: **FC-107**
Date issued: **August 18, 2005**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2, Part24.

Prepared By

Date 2005.08.22

WT JANG- Test Engineer

Checked By

Date 2005.08.23

SH PARK - Senior Manager

Authorized By

Date 2005.08.23

JK CHOI - General Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC Certification Information	3
1.1 §2.1033 General Information	3
2. INTRODUCTION	4
2.1 General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1 Equivalent Isotropic Radiated Power	7
5.2 Radiated Spurious & Harmonic Emission	8
5.3 Occupied Bandwidth	9
5.4 Spurious and Harmonic Emissions at Antenna Terminal	9
5.4.1 Occupied Bandwidth Emission Limits	9
5.4.2 Conducted Spurious Emission	11
5.5 Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1 Equivalent Isotropic Radiated Power (E.I.R.P.)	14
6.2 Radiated Spurious & Harmonic Measurement	15
6.3 Radiated Spurious & Harmonic Conversion Table	16
6.4 Frequency Stability	17
6.4.1 Frequency Stability Table	17
6.4.2 Frequency Stability Graph	18
7. CONCLUSION	20
8. TEST PLOTS	21



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742

- Attention: SungJoo KIM, Engineering Manager (QA Lab)

- FCC ID: A3LSGHX700
- Additional Model: SGH-X708
- Quantity: Quantity production is planned
- Emission Designators: 300KG7W
- Tx Freq. Range: 1850.2MHz -1909.8MHz
- Rx Freq. Range: 1930.2MHz – 1989.8MHz
- Max. Power Rating: 1.754W EIRP GSM1900 (32.44 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Single-Band PCS GSM/EDGE Phone with Bluetooth
- Frequency Tolerance: $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s): §24(E), §2.
- Dates of Test: August 10, August 12-17 , 2005
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FC-107-R1

- End of page -

2. INTRODUCTION

2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 442-742
 The site have 1 Fully-anechoic chamber and measurement facility.

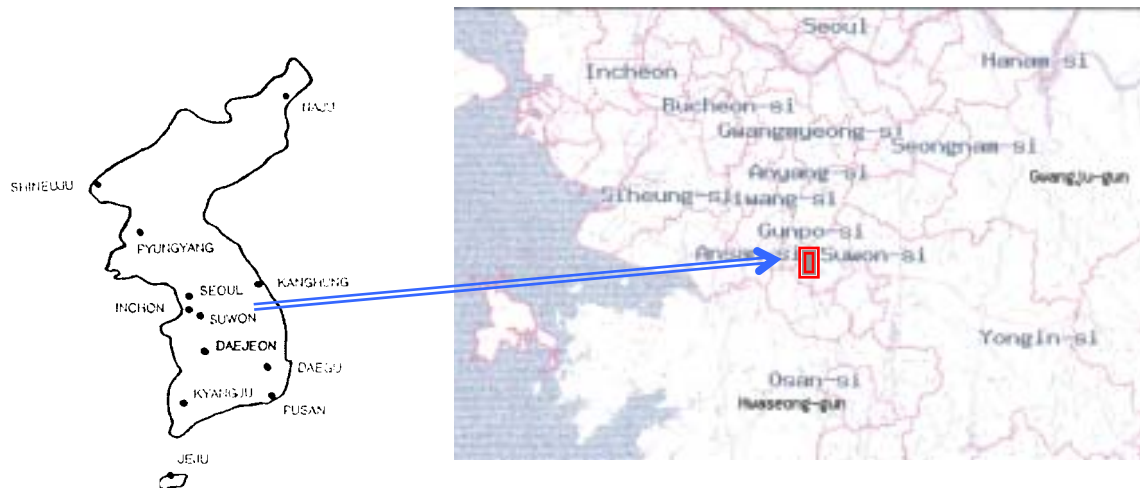


Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

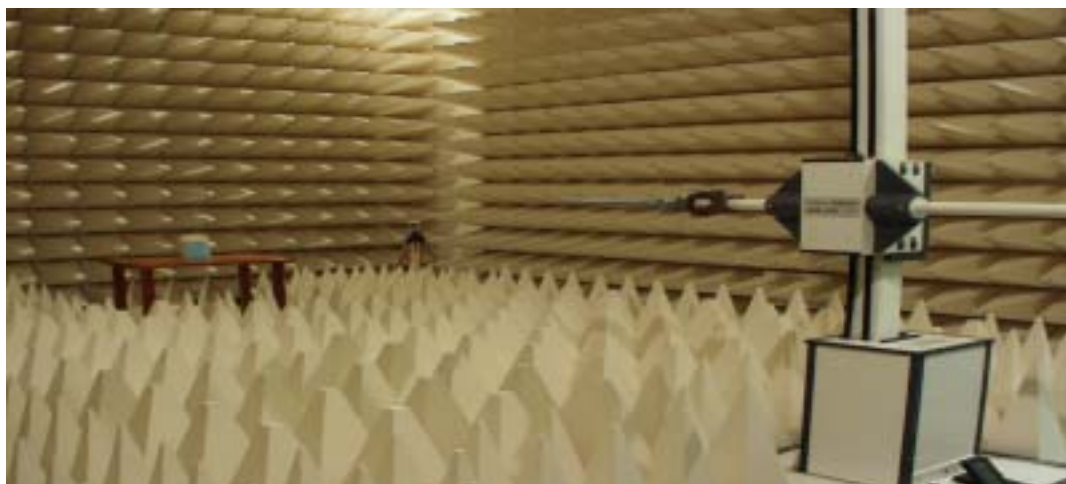


Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

4. TEST EQUIPMENT LIST

Name of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2005-09-20
	E4440A(3Hz~26.5GHz)	MY41000236	2005-10-27
	E4440A(3Hz~26.5GHz)	MY41000233	2005-11-04
Signal Generator	SMIQ03B	83824/021	2005-12-27
	SMR20	835197/030	2006-01-18
Power Meter	E4419B	GB41293846	2005-09-21
Power Sensor	8481B	3318A10325	2005-10-06
	8485A	3318A19924	2005-09-20
Amplifier	5S1G4	304866	2005-10-19
Pre-Amplifier	8449B	3008A00691	2006-01-11
Communication test set	8960	GB42230535	2005-11-04
	8960	GB42360886	2005-10-27
Antenna Master	MA0001	ANT0967	Not Required
Controller	HD100	100/756	Not Required
Environmental Chamber	PL-4S	13005454	2006-07-18
	SH-241	92000548	2005-11-22
	SH-241	92000549	2005-11-22
Horn Antenna	HF906	360306/011	2006-03-17
	HF906	100134	2006-04-25
Dipole Antenna	3121C-DB4	9007-587	2005-12-02
Receive Antenna	HL040	353255/020	2006-06-21
Attenuator	8494A	3308A31997	2006-01-03
	8496A	3308A14426	2006-01-04
Divider	11636B	51941	Not Required
	11636B	51942	Not Required
	11636B	51946	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	3	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Shielded Fully Anechoic Chamber	RF0002	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1 Equivalent Isotropic Radiated Power

Test Set-up for the EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

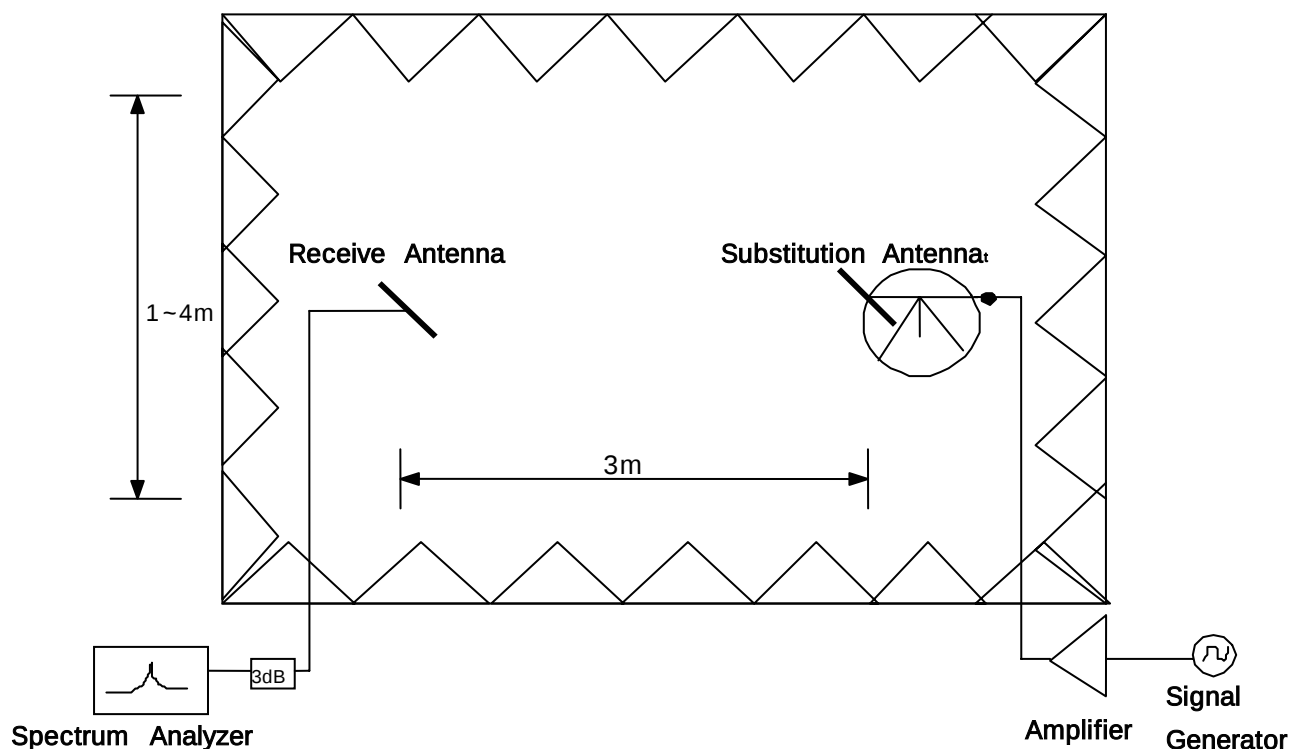


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A Horn antenna (for readings above 1GHz) was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of Horn is measured. The EIRP is recorded. Between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2 Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001

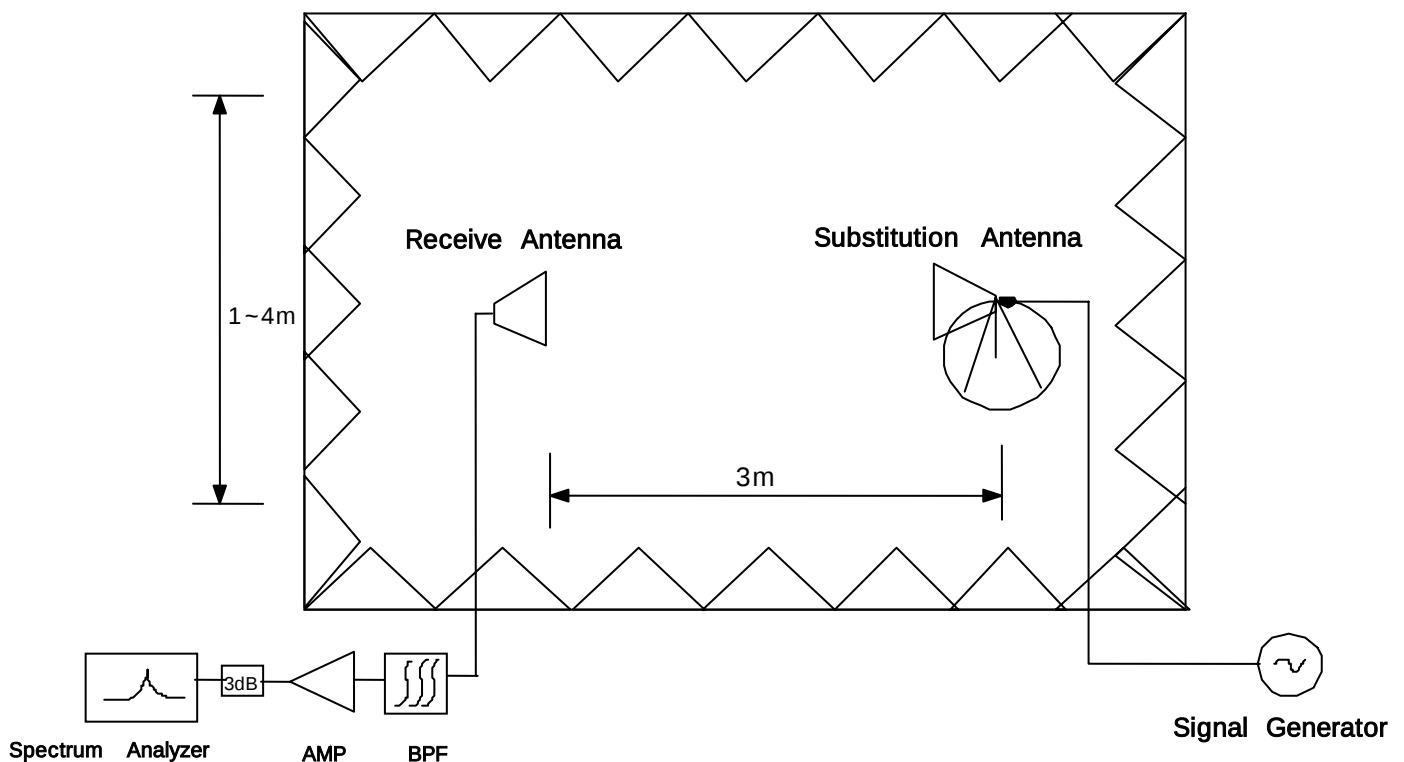


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. Between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz. So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

- End of page -

5.3 Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.4 Spurious and Harmonic Emissions at Antenna Terminal

5.4.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.4.2 Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(1.754 \text{ W}) = 45.44 \text{ dB}$$

$$32.44 \text{ dBm} - 45.44 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 20GHz. A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

- End of page -

5.5 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

6. TEST DATA

6.1 Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	27.00	H	-13.82	8.42	-22.24
		V	-14.38	8.42	-22.80
1880.00	27.00	H	-13.71	8.25	-21.96
		V	-14.01	8.25	-22.26
1909.80	27.00	H	-13.66	8.40	-22.06
		V	-13.82	8.40	-22.22

■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-18.97	H2	149	30.27	1.604	Standard
1880.00	-17.04	H2	149	31.92	1.556	Standard
1909.80	-16.62	H2	143	32.44	1.754	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

6.2 Radiated Spurious & Harmonic measurement

Field Strength of SPURIOUS Radiation

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 32.44 dBm = 1.754W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 45.44$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-56.82	H1	62.99
	3	5550.60	-60.26	H1	61.72
	4	7400.80	-66.60	H2	63.83
	5	9251.00	-66.84	H1	58.73
	6	11101.20	-68.09	H1	57.93
	7	12951.40	-	-	-
661	2	3760.00	--50.69	H1	57.01
	3	5640.00	-54.86	H1	56.66
	4	7520.00	-64.32	H1	61.59
	5	9400.00	-66.97	H1	60.10
	6	11280.00	-68.43	H1	57.61
	7	13160.00	-	-	-
810	2	3819.60	-44.47	H2	50.58
	3	5729.40	-57.22	H1	58.73
	4	7639.20	-65.53	V	63.23
	5	9549.00	-66.85	H2	59.11
	6	11458.80	-68.56	H2	56.34
	7	13368.60	-	-	-

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.3 Radiated Spurious & Harmonic Conversion Table

Date : 2005 . 08 . 12.

Test Engineer : WT JANG

Tx Cable loss
 Tx Horn Ant Gain
 Rx Cable loss + HPF Insertion loss + Attenuator
 Pre-Amp gain
 Air loss
 Tested Level from EUT
 = + + -
 = EIRP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	12.62	9.73	7.81	-56.82	-59.64	-30.55	-32.88	62.99	65.32
	3	5550.60	16.79	11.55	5.77	-60.26	-59.99	-29.28	-29.74	61.72	62.18
	4	7400.80	20.18	11.44	2.00	-66.60	-67.34	-31.39	-33.49	63.83	65.93
	5	9251.00	23.87	12.17	-0.72	-66.84	-67.69	-26.29	-27.60	58.73	60.04
	6	11101.20	27.05	13.66	-2.89	-68.09	-68.46	-25.49	-26.23	57.93	58.67
	7	12951.40	33.04	13.27	-9.77	-	-	-	-	-	-
661	2	3760.00	12.75	9.73	7.73	-50.69	-51.19	-24.57	-24.65	57.01	57.09
	3	5640.00	16.66	11.55	5.74	-54.86	-54.65	-24.22	-24.28	56.66	56.72
	4	7520.00	19.98	11.44	1.69	-64.32	-64.21	-29.15	-30.63	61.59	63.07
	5	9400.00	23.78	12.17	-1.12	-66.97	-68.01	-27.66	-29.55	60.10	61.99
	6	11280.00	27.20	13.66	-3.22	-68.43	-68.74	-25.17	-26.08	57.61	58.52
	7	13160.00	33.30	13.27	-10.03	-	-	-	-	-	-
810	2	3819.60	13.30	9.73	7.48	-44.47	-45.68	-18.14	-18.52	50.58	50.96
	3	5729.40	16.85	11.55	5.64	-57.22	-58.76	-26.29	-28.00	58.73	60.44
	4	7639.20	20.70	11.44	1.25	-66.59	-65.53	-30.98	-30.79	63.42	63.23
	5	9549.00	24.68	12.17	-1.32	-66.85	-66.76	-26.67	-27.57	59.11	60.01
	6	11458.80	28.00	13.66	-3.45	-68.56	-68.79	-23.90	-24.99	56.34	57.43
	7	13368.60	34.17	13.27	-10.90	-	-	-	-	-	-

6.4 Frequency Stability

6.4.1 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-37.42	1,879,999,963	-0.000002	-0.020
100%		-30	-41.53	1,879,999,958	-0.000002	-0.022
100%		-20	-29.36	1,879,999,971	-0.000002	-0.016
100%		-10	-40.21	1,879,999,960	-0.000002	-0.021
100%		0	-38.41	1,879,999,962	-0.000002	-0.020
100%		+10	-37.29	1,879,999,963	-0.000002	-0.020
100%		+20	-37.42	1,879,999,963	-0.000002	-0.020
100%		+30	-41.71	1,879,999,958	-0.000002	-0.022
100%		+40	-36.94	1,879,999,963	-0.000002	-0.020
100%		+50	-38.29	1,879,999,962	-0.000002	-0.020
100%		+60	-41.44	1,879,999,959	-0.000002	-0.022
85%	3.21	+20	-36.11	1,879,999,964	-0.000002	-0.019
115%	4.26	+20	-49.98	1,879,999,950	-0.000003	-0.027
Batt.Endpoint	3.21	+20	-36.11	1,879,999,964	-0.000002	-0.019

Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.


The EUT is tested down to the battery end point.

6.4.2 Frequency Stability Graph

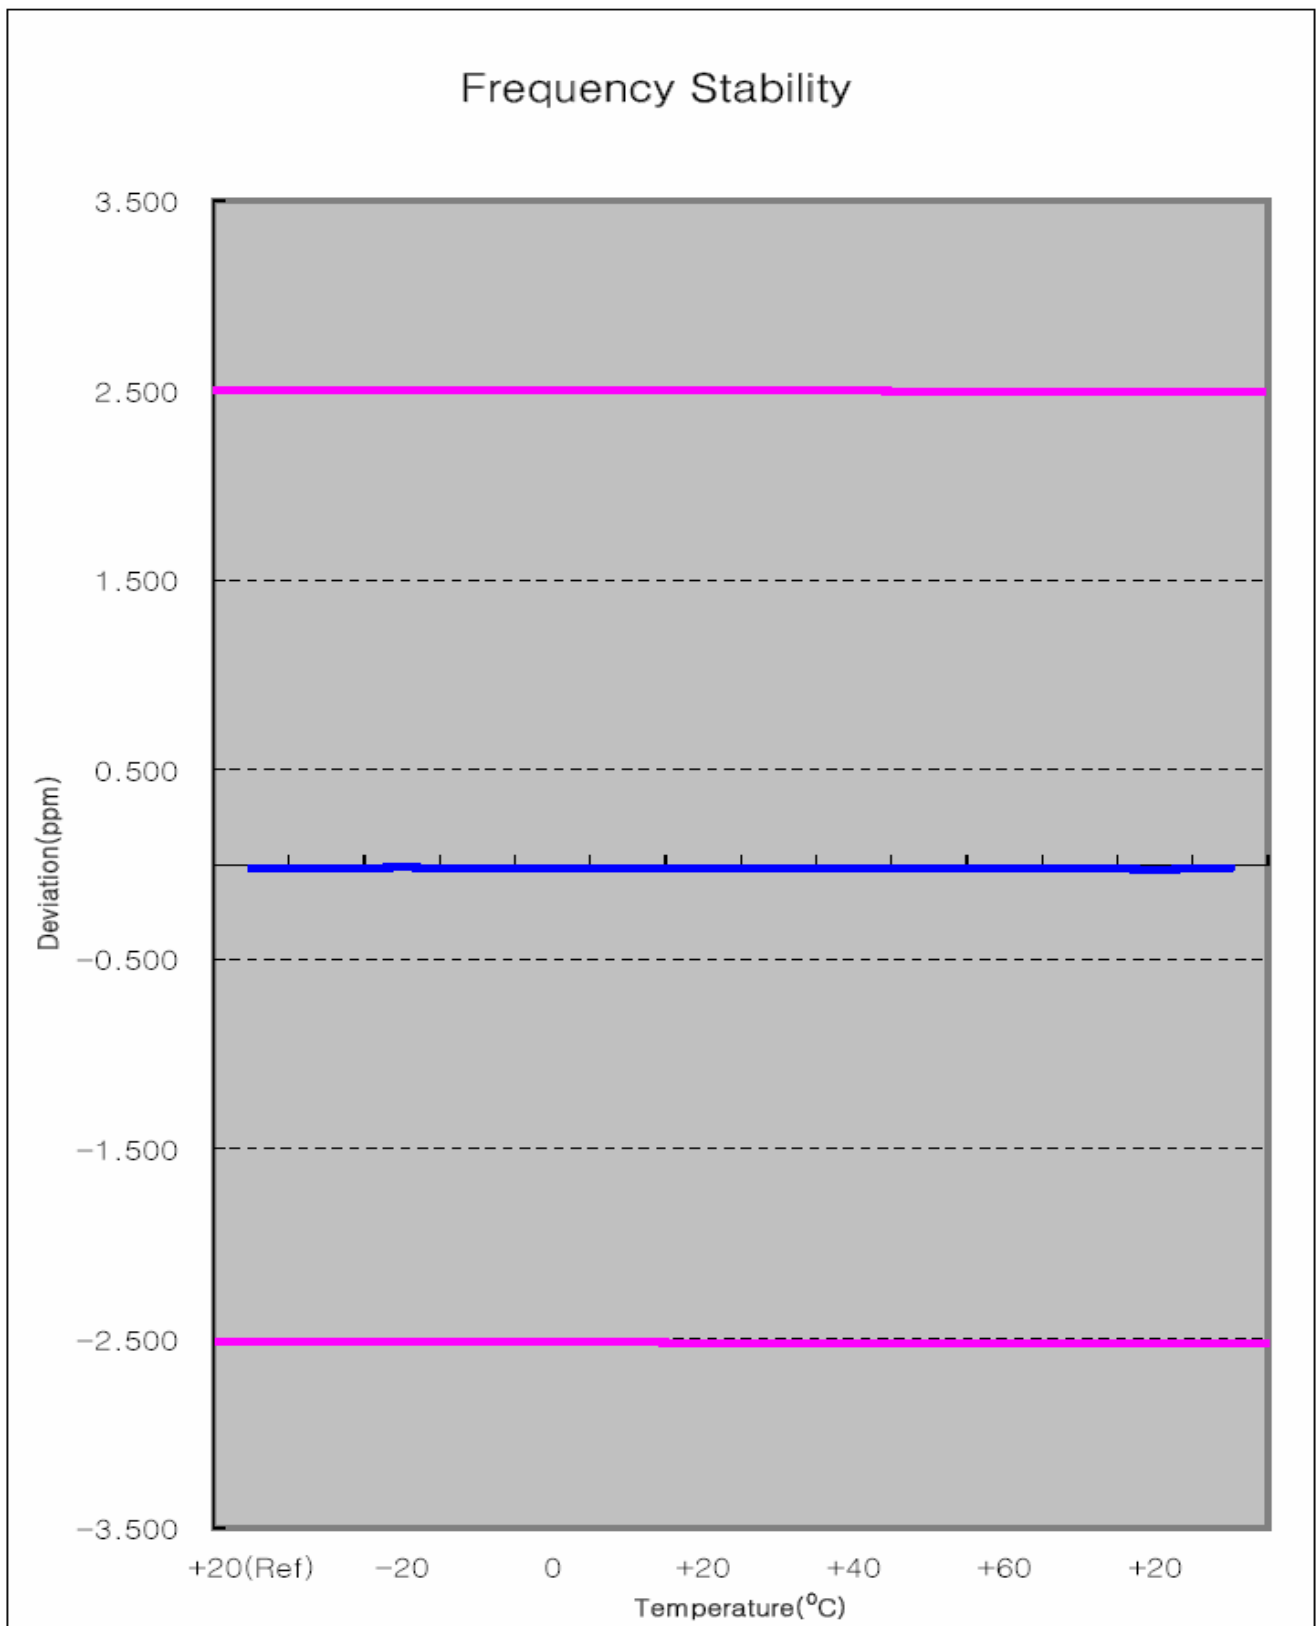

- End of page -

Zoom In

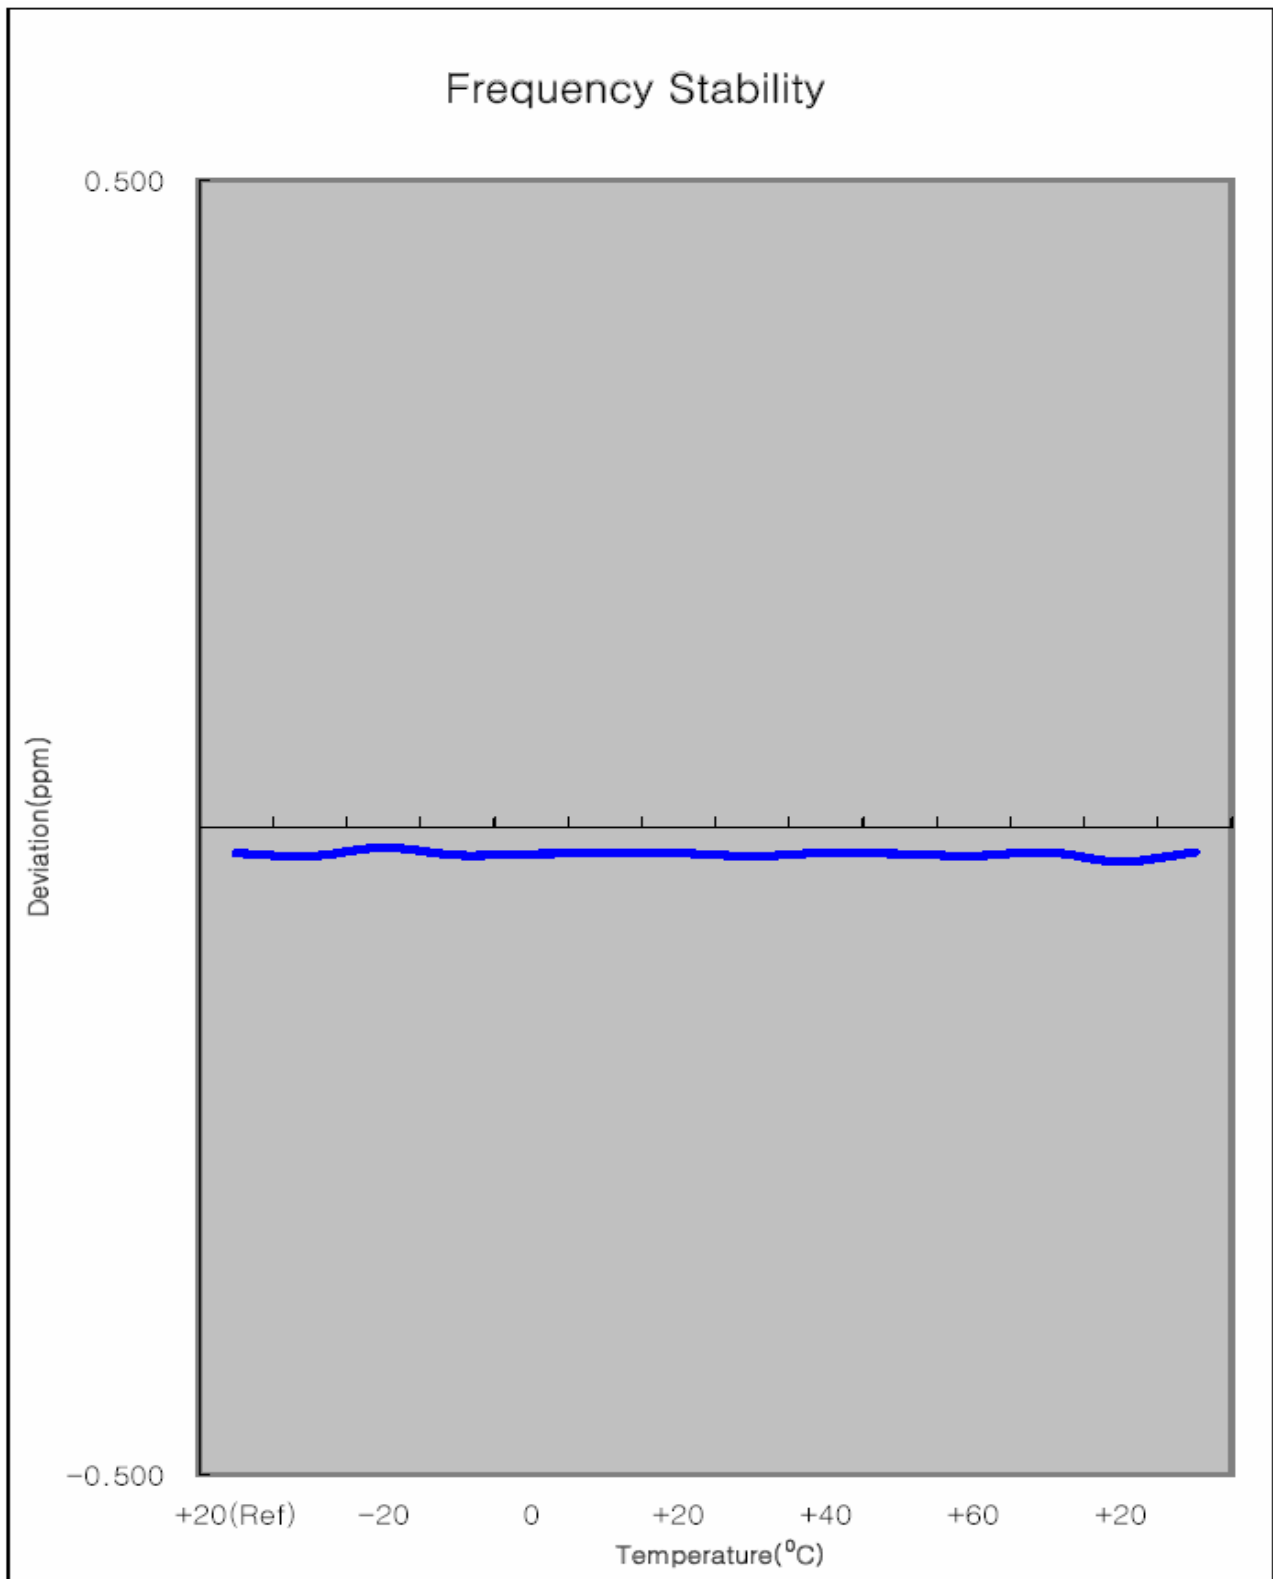

- End of page -



7. CONCLUSION

The data collected shows that the SAMSUNG Single-Band PCS GSM/EDGE Phone with Bluetooth.
FCC ID : A3LSGHX700 complies with all the requirements of Parts 2,24 of the FCC Rules.

- End of page -

8. TEST PLOTS

- End of page -



Agilent

Freq/Channel

Ch Freq 1.8502 GHz Trig Free
Occupied Bandwidth

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSGHX700 0BW Ch.512

Ref 30 dBm Atten 40 dB

#Peak

Log


10

dB/

Offst

8.61

dB

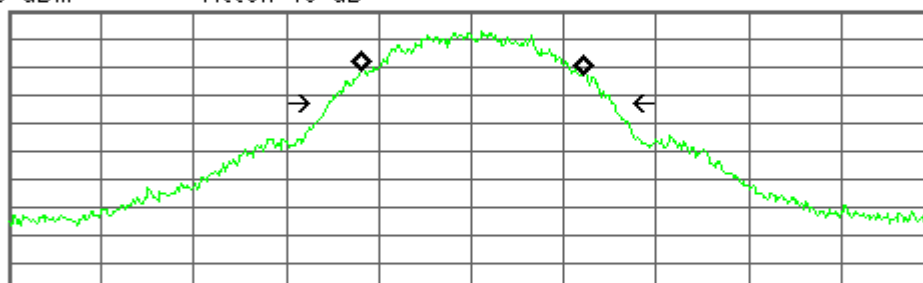

Center 1.850 200 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 134 ms (601 pts)

Occupied Bandwidth
244.7064 kHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 398.525 Hz

x dB Bandwidth 311.726 kHz

Copyright 2000-2002 Agilent Technologies



Agilent

Freq/Channel

Ch Freq 1.88 GHz Trig Free
Occupied Bandwidth

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSGHX700 0BW Ch.661

Ref 30 dBm Atten 40 dB

#Peak

Log


10

dB/

Offst

8.61

dB

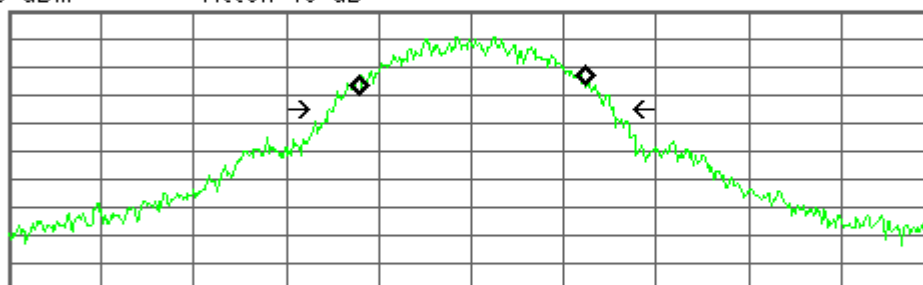

Center 1.880 000 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 134 ms (601 pts)

Occupied Bandwidth
247.3933 kHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 454.711 Hz

x dB Bandwidth 310.663 kHz

Copyright 2000-2002 Agilent Technologies

Ch Freq 1.9098 GHz Trig Free
Occupied Bandwidth

Center Freq
1.90980000 GHz

Start Freq
1.90930000 GHz

Stop Freq
1.91030000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSGHX700 0BW Ch.810

Ref 30 dBm Atten 40 dB

#Peak

Log


10

dB/

Offst

8.61

dB

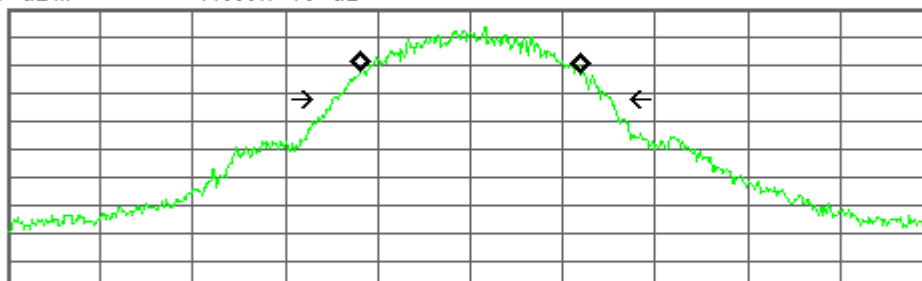

Center 1.909 800 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 134 ms (601 pts)

Occupied Bandwidth
242.9002 kHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB


Transmit Freq Error 783.277 Hz


x dB Bandwidth 305.413 kHz


Copyright 2000-2002 Agilent Technologies


Measurement/Instrument Screen																													
Control		GSM/GPRS Transmit Power						TCH Parms																					
GSM/GPRS TX Power Setup ▾		GSM Transmit Power 30.07 dBm Continuous						Downlink Traffic Power ▾																					
Swap Window Positions 1 of 2								Traffic Band																					
		PCS																											
		Traffic Channel																											
		512																											
		RIS TX Level																											
Phase & Frequency Error		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.31</td> <td>1.74</td> <td>-33.90</td> </tr> <tr> <td>Maximum</td> <td>6.95</td> <td>2.34</td> <td>-9.97</td> </tr> <tr> <td>Average</td> <td>5.64</td> <td>1.96</td> <td>-23.75</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table> 40 / 50 Continuous							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.31	1.74	-33.90	Maximum	6.95	2.34	-9.97	Average	5.64	1.96	-23.75	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾	
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	4.31	1.74	-33.90																										
Maximum	6.95	2.34	-9.97																										
Average	5.64	1.96	-23.75																										
Pass/Fail	Pass	Pass	Pass																										
Return																													
Active Cell Connected		Sys Type: GSM						1 of 2																					
IntRef Offset								1 of 2																					


Measurement/Instrument Screen																														
Control		GSM/GPRS Transmit Power						TCH Parms																						
GSM/GPRS TX Power Setup ▾		GSM Transmit Power 30.13 dBm Continuous						Downlink Traffic Power ▾																						
Swap Window Positions								Traffic Band			PCS																			
		Traffic Channel			810																									
		RIS TX Level			0																									
		Channel Mode Setup ▾																												
		Return																												
		Phase & Frequency Error <table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>5.09</td> <td>1.93</td> <td>-34.89</td> </tr> <tr> <td>Maximum</td> <td>7.87</td> <td>2.72</td> <td>-16.62</td> </tr> <tr> <td>Average</td> <td>6.22</td> <td>2.34</td> <td>-26.09</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table> 20 / 50 Continuous							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.09	1.93	-34.89	Maximum	7.87	2.72	-16.62	Average	6.22	2.34	-26.09	Pass/Fail	Pass	Pass	Pass			
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	5.09	1.93	-34.89																											
Maximum	7.87	2.72	-16.62																											
Average	6.22	2.34	-26.09																											
Pass/Fail	Pass	Pass	Pass																											
		Active Cell Connected			Sys Type: GSM																									
1 of 2					IntRef Offset			1 of 2																						

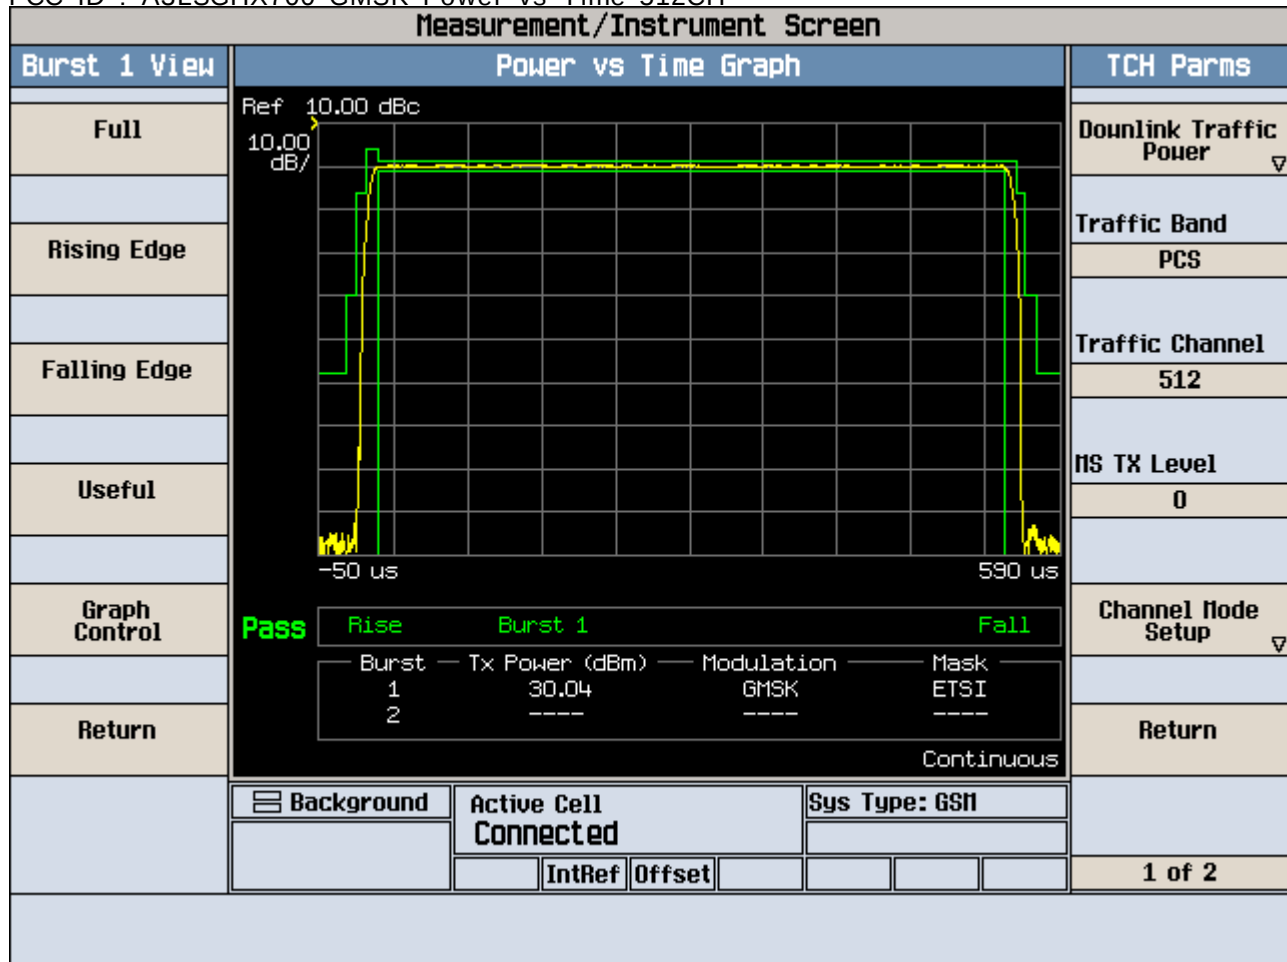


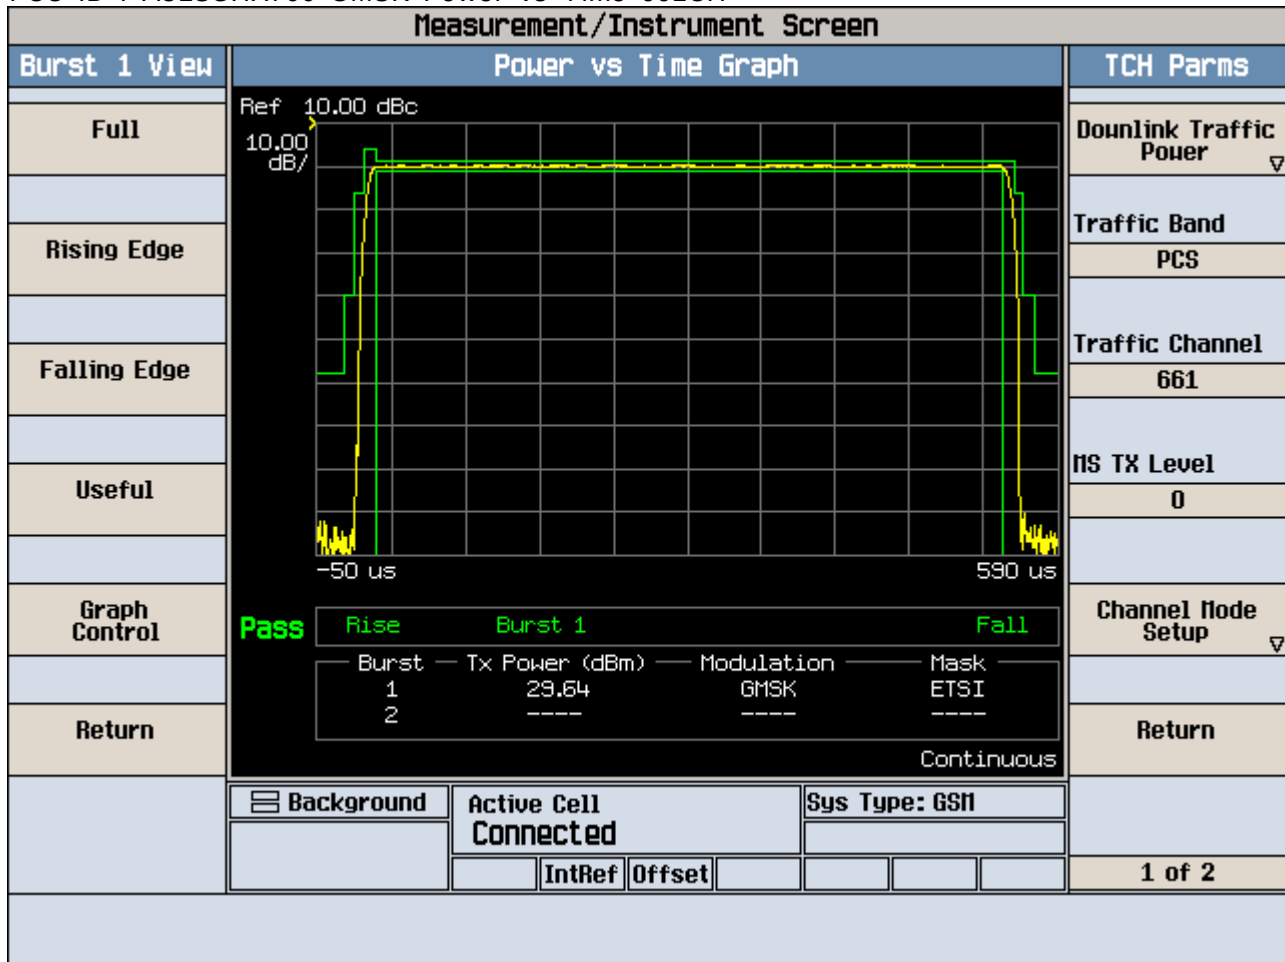

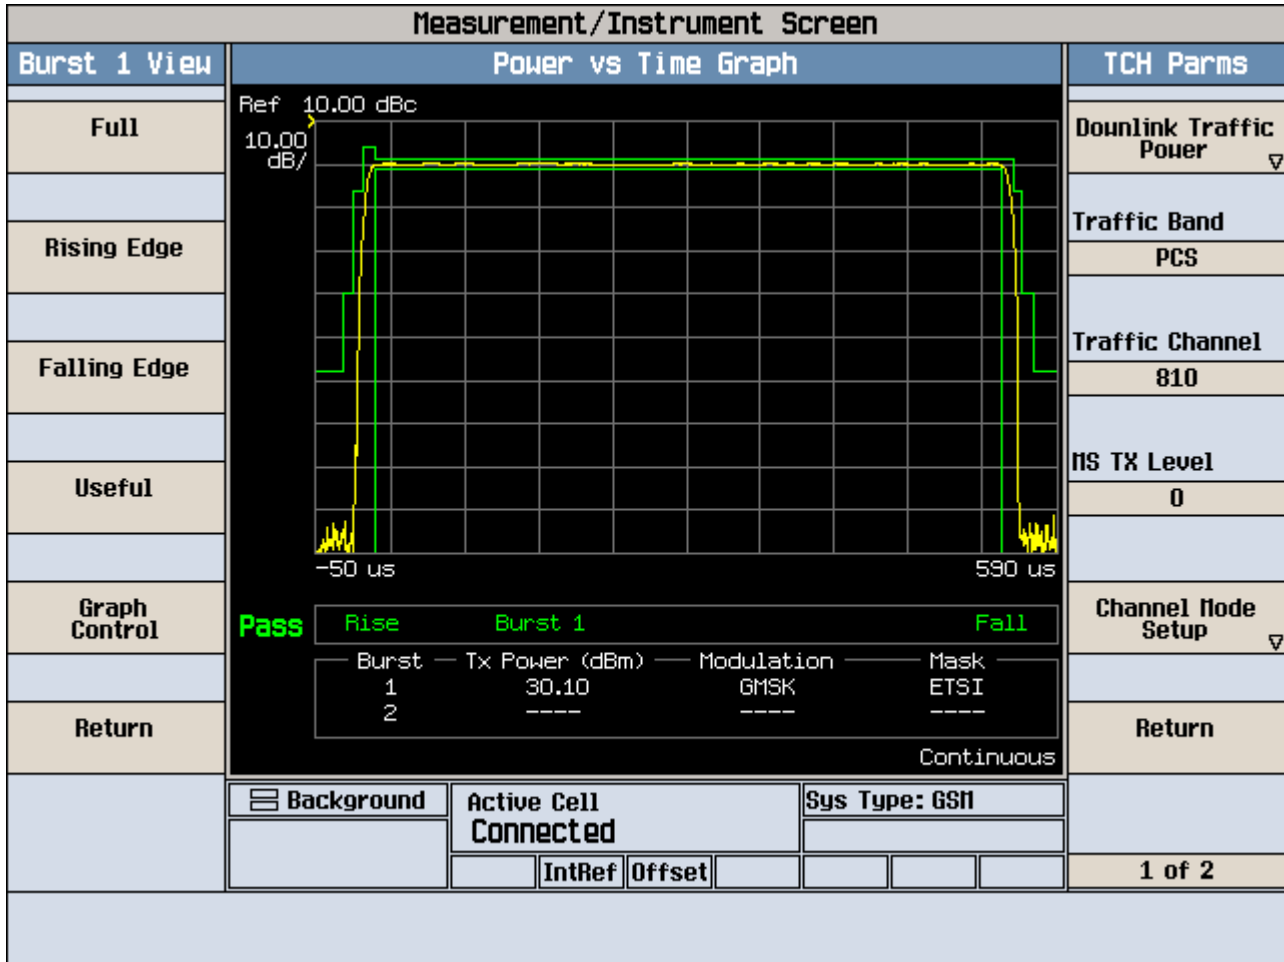

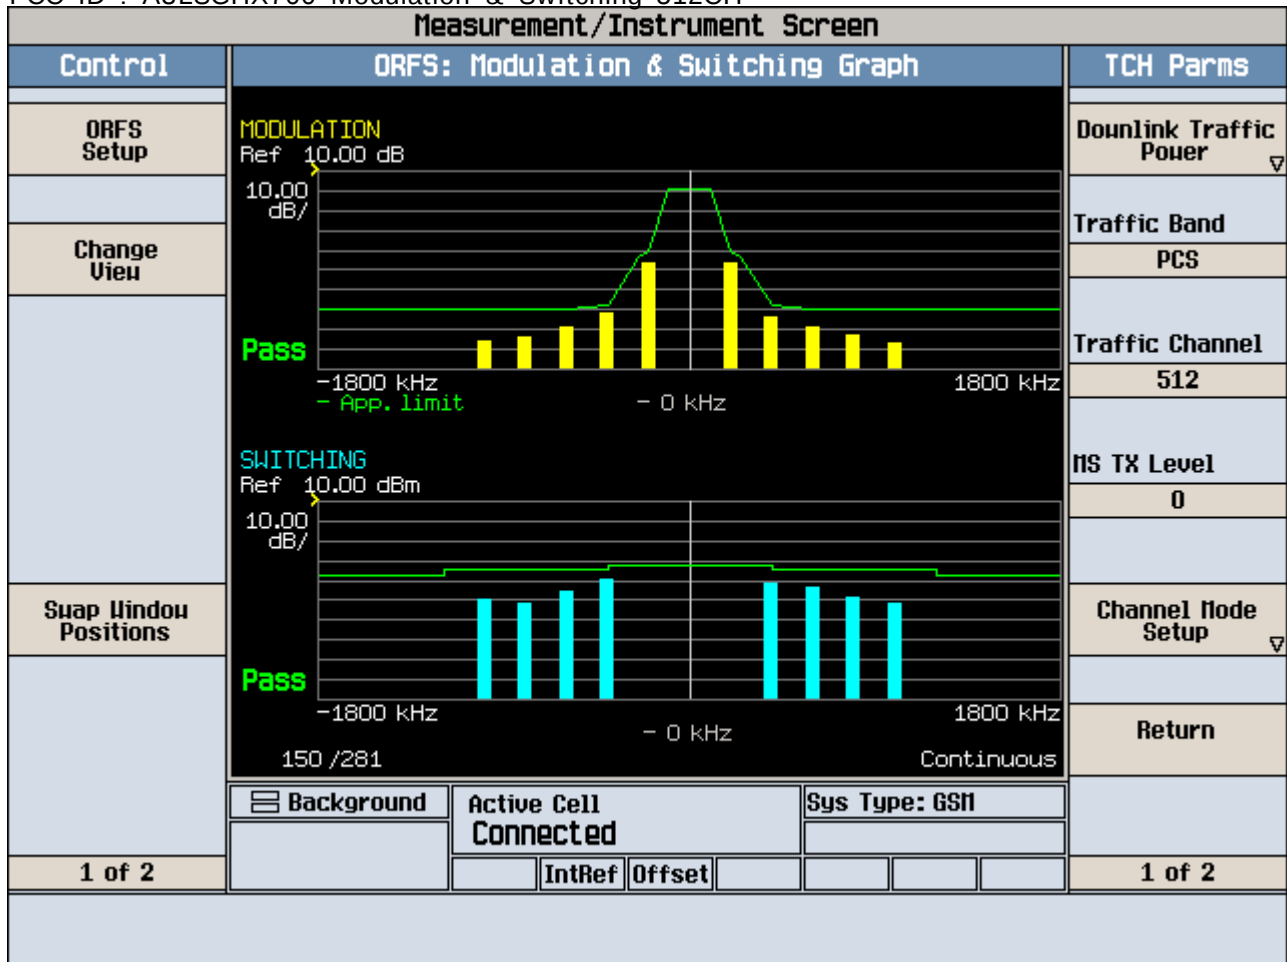


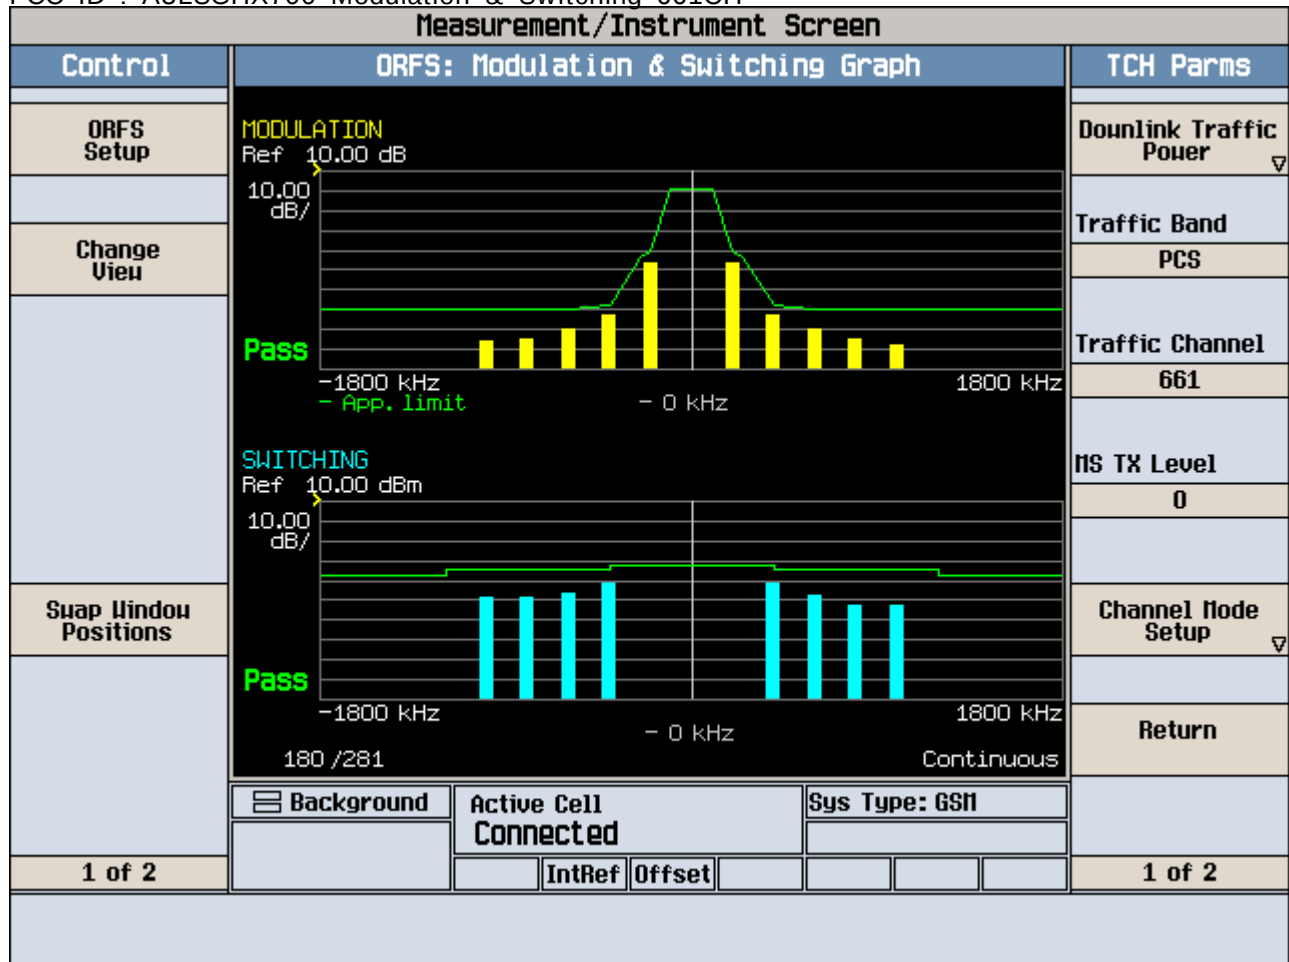

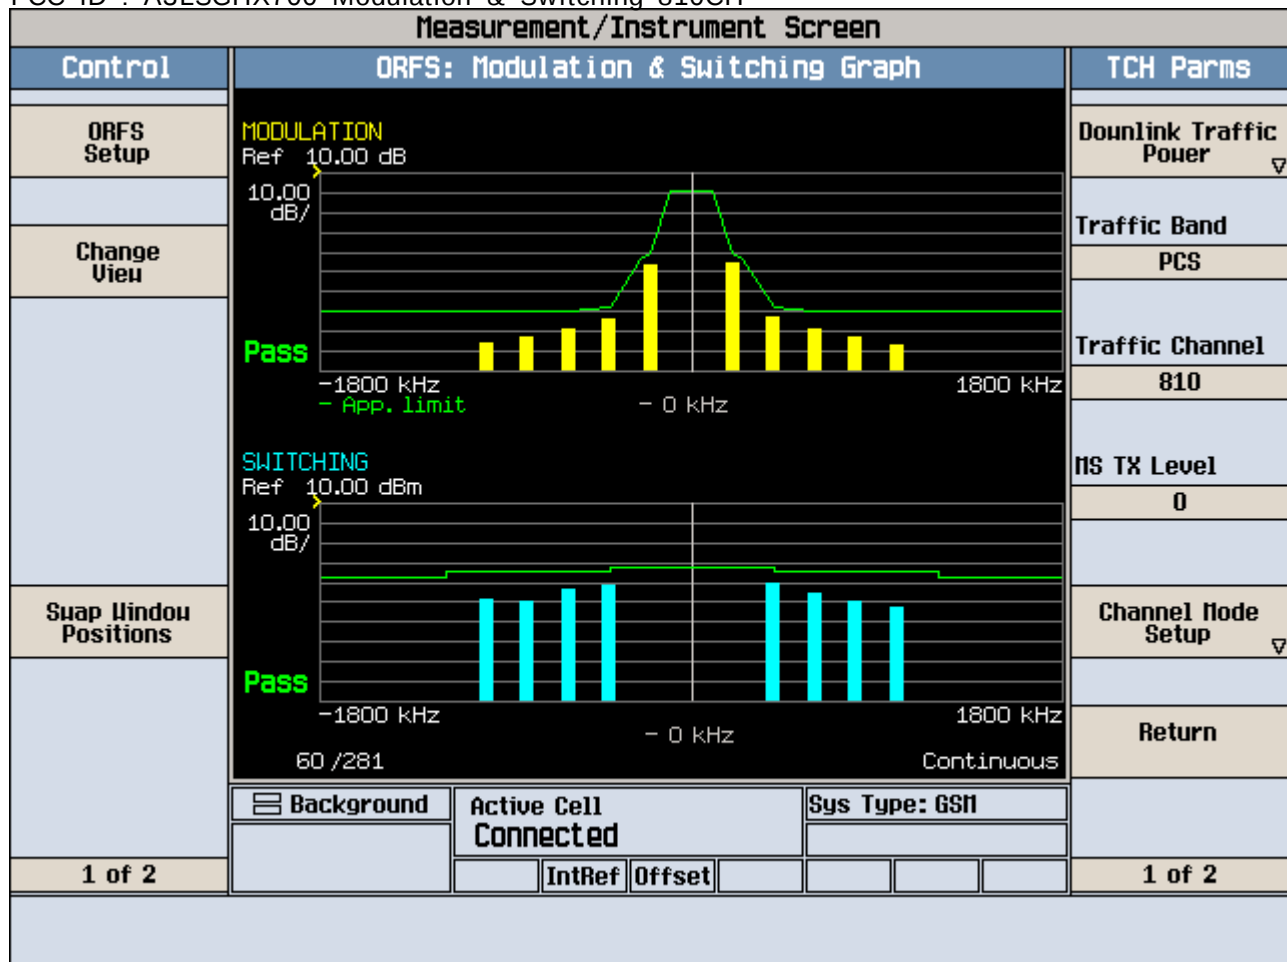



Agilent

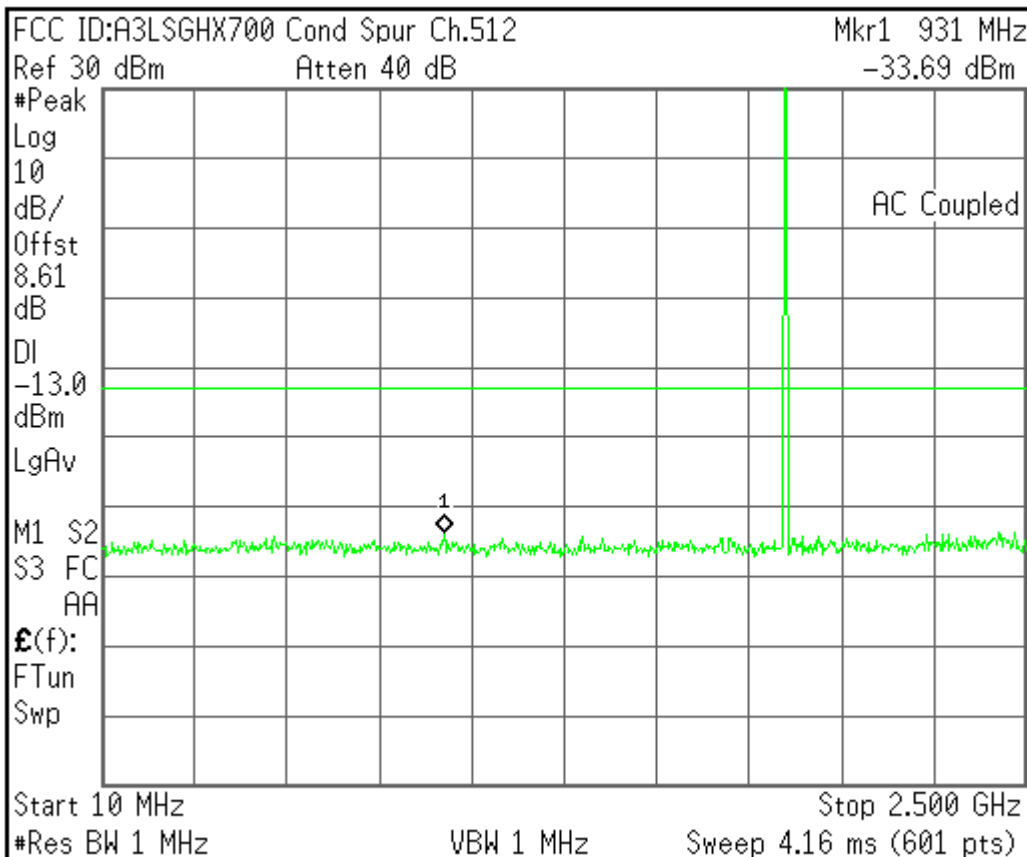


Freq/Channel

Center Freq
1.25500000 GHzStart Freq
10.0000000 MHzStop Freq
2.50000000 GHzCF Step
249.000000 MHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Copyright 2000-2002 Agilent Technologies





Agilent


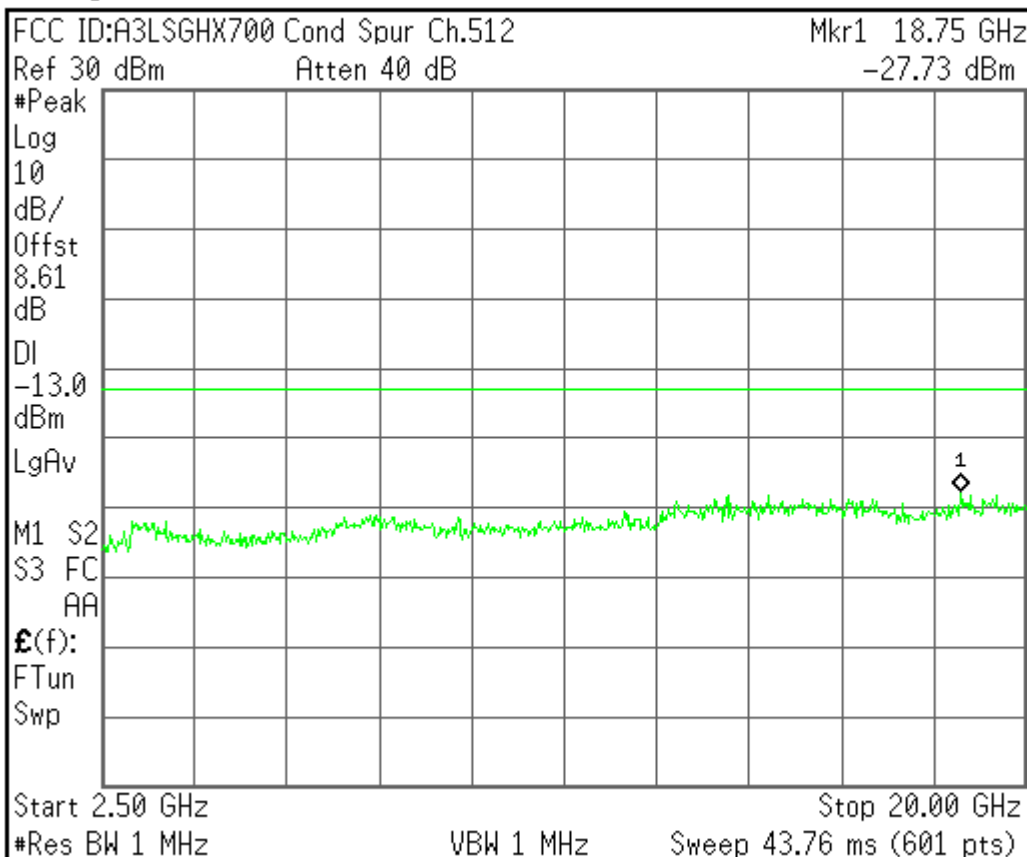




Freq/Channel

Center Freq
11.2500000 GHzStart Freq
2.50000000 GHzStop Freq
20.0000000 GHzCF Step
1.75000000 GHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Copyright 2000-2002 Agilent Technologies

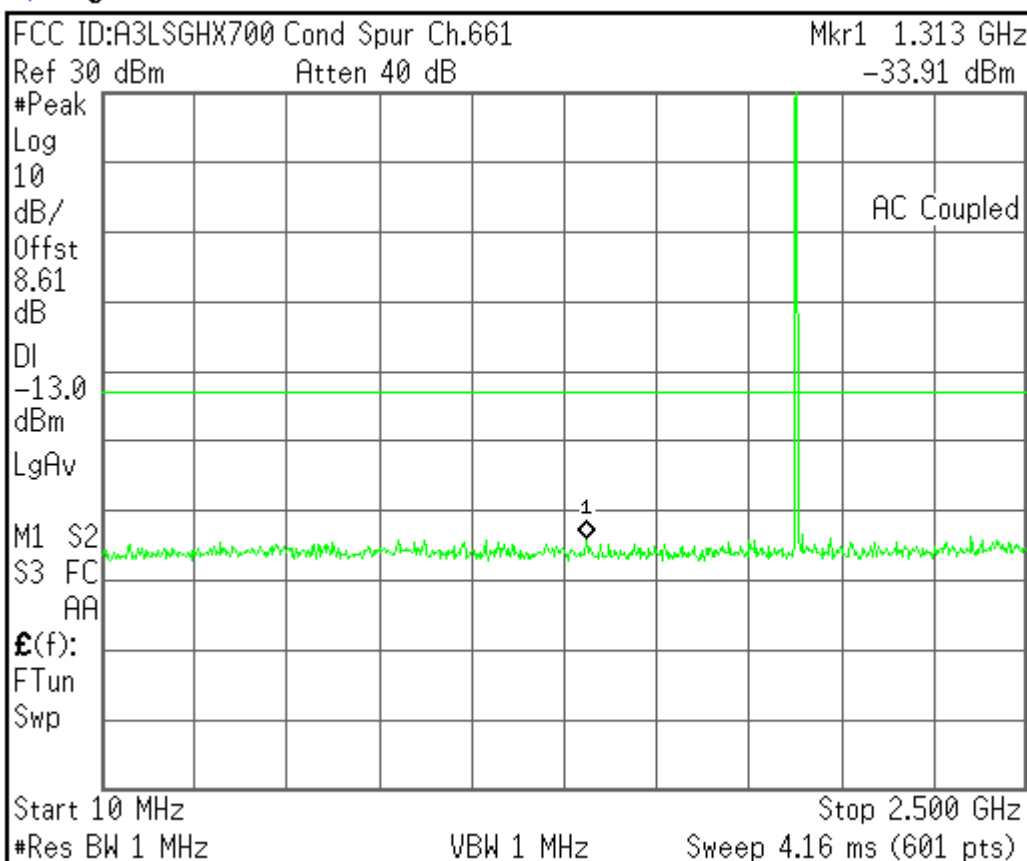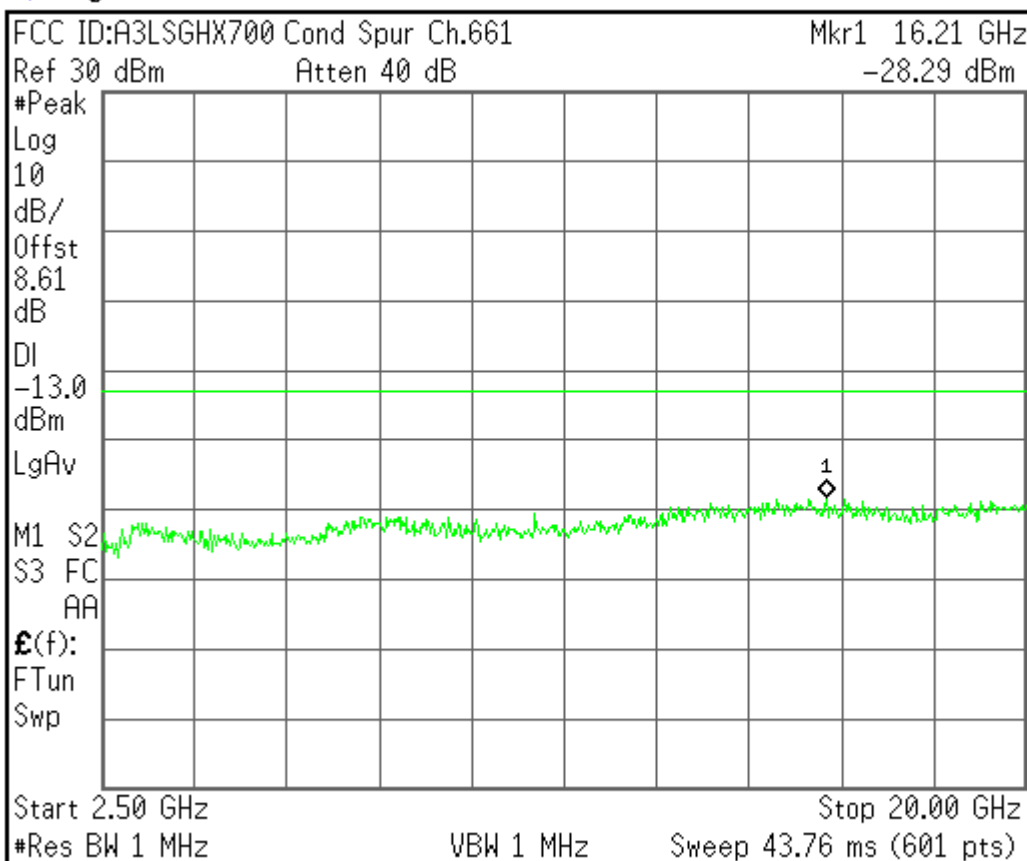**Freq/Channel****Center Freq**
1.25500000 GHz**Start Freq**
10.0000000 MHz**Stop Freq**
2.50000000 GHz**CF Step**
249.000000 MHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Copyright 2000-2002 Agilent Technologies****Freq/Channel****Center Freq**
11.2500000 GHz**Start Freq**
2.50000000 GHz**Stop Freq**
20.0000000 GHz**CF Step**
1.75000000 GHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Copyright 2000-2002 Agilent Technologies**

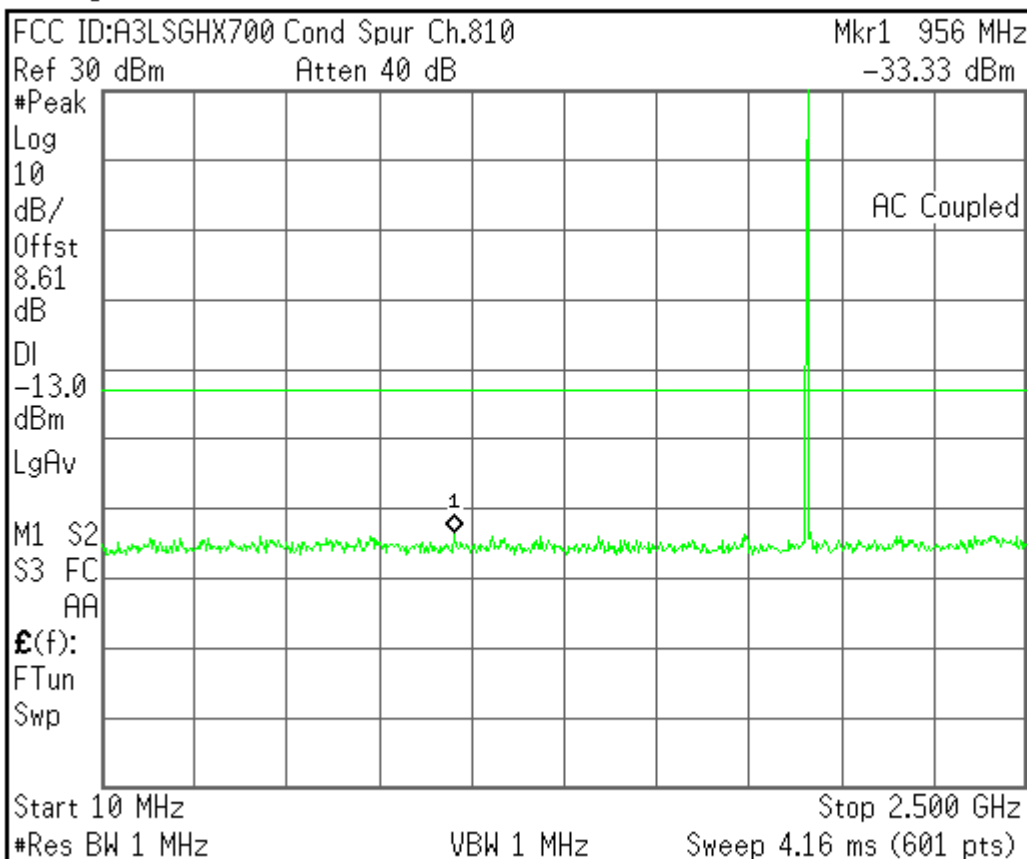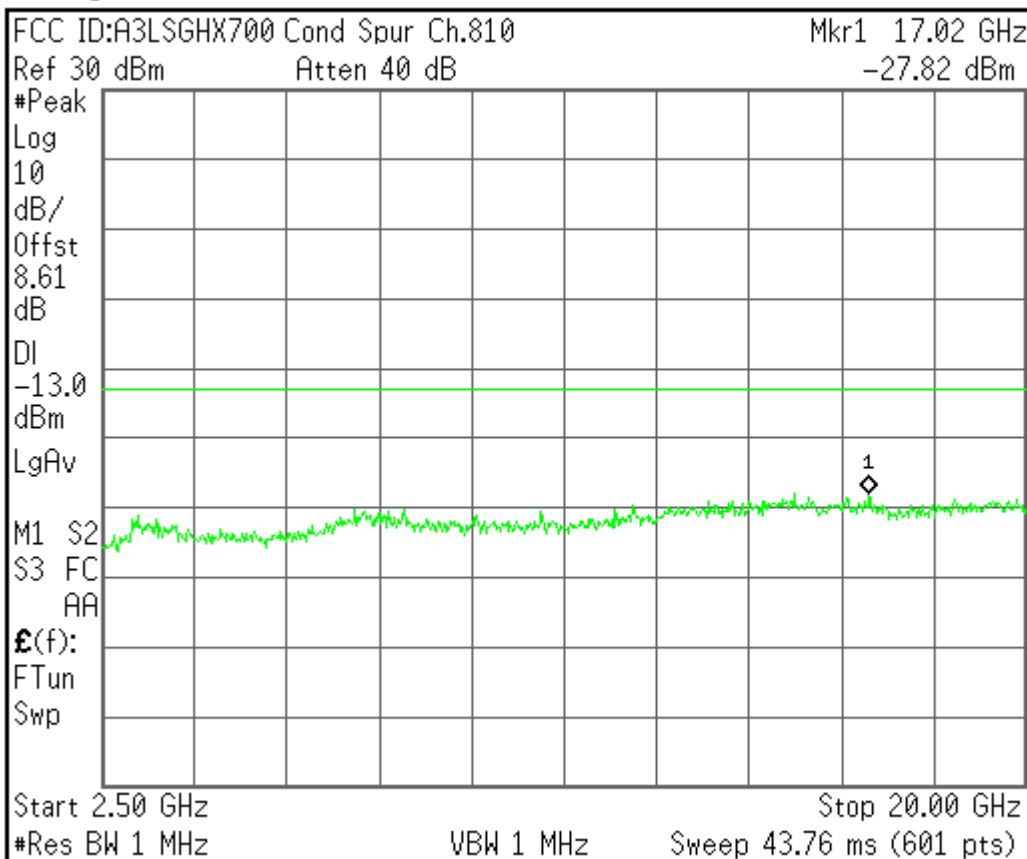**Freq/Channel****Center Freq**
1.25500000 GHz**Start Freq**
10.0000000 MHz**Stop Freq**
2.50000000 GHz**CF Step**
249.000000 MHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Copyright 2000-2002 Agilent Technologies****Freq/Channel****Center Freq**
11.2500000 GHz**Start Freq**
2.50000000 GHz**Stop Freq**
20.0000000 GHz**CF Step**
1.75000000 GHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Copyright 2000-2002 Agilent Technologies**

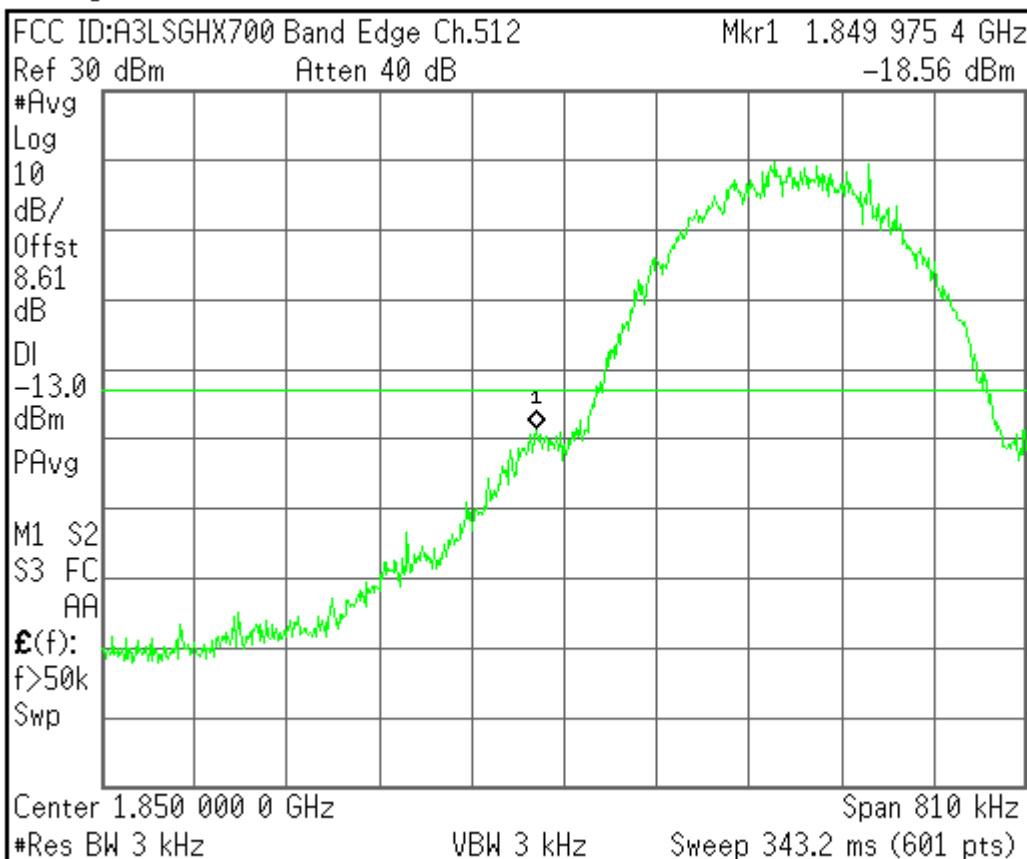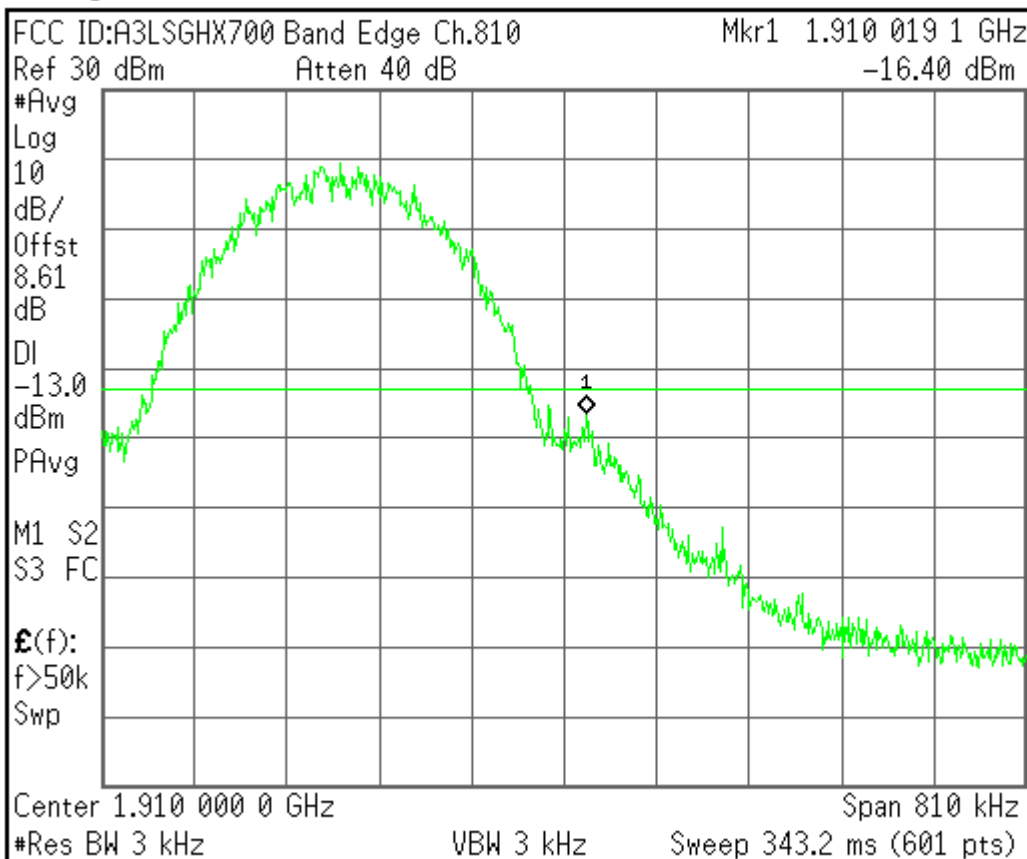
**Freq/Channel****Center Freq**
1.85000000 GHz**Start Freq**
1.84959500 GHz**Stop Freq**
1.85040500 GHz**CF Step**
81.00000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Copyright 2000-2002 Agilent Technologies****Freq/Channel****Center Freq**
1.91000000 GHz**Start Freq**
1.90959500 GHz**Stop Freq**
1.91040500 GHz**CF Step**
81.00000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Copyright 2000-2004 Agilent Technologies**

<EDGE Mode test plot>

Measurement/Instrument Screen											
Control		EGPRS Transmit Power								PDCH Params	
EGPRS Transmit Power Setup ▾		EPSK Burst Power				EPSK Est Carrier Power				Downlink Traffic Power ▾	
		Minimum		Maximum		Minimum		Maximum		Traffic Band	
		25.41 dBm		26.30 dBm		25.98 dBm		26.03 dBm		PCS	
		Average		Std Dev		Average		Std Dev		Traffic Channel	
		25.90 dBm		0.23 dBm		26.00 dBm		0.01 dBm		512	
		20 /20				Continuous					
						Active Cell Transferring				Sys Type: EGPRS	
1 of 2					IntRef	Offset					1 of 2

Measurement/Instrument Screen											
Control		EGPRS Transmit Power								PDCH Parms	
EGPRS Transmit Power Setup ▾		EPSK Burst Power Minimum Maximum 25.49 dBm 26.13 dBm Average Std Dev 25.84 dBm 0.21 dBm 20 / 20				EPSK Est Carrier Power Minimum Maximum 25.79 dBm 25.85 dBm Average Std Dev 25.82 dBm 0.01 dBm Continuous				Downlink Traffic Power ▾ Traffic Band PCS Traffic Channel 661 NS TX Level ▾ Modulation Coding Scheme ▾ Return	
1 of 2				Active Cell Transferring		Sys Type: EGPRS				1 of 2	
					IntRef	Offset					

Measurement/Instrument Screen											
Control		EGPRS Transmit Power								PDCH Parms	
EGPRS Transmit Power Setup ▾		EPSK Burst Power				EPSK Est Carrier Power				Downlink Traffic Power ▾	
		Minimum		Maximum		Minimum		Maximum		Traffic Band	
		25.34 dBm		26.11 dBm		25.66 dBm		25.70 dBm		PCS	
		Average		Std Dev		Average		Std Dev		Traffic Channel	
		25.72 dBm		0.21 dBm		25.68 dBm		0.01 dBm		810	
		20 / 20				Continuous					
						NS TX Level ▾					
						Modulation Coding Scheme ▾					
						Return					
						Active Cell Transferring					
						Sys Type: EGPRS					
1 of 2					IntRef	Offset					1 of 2

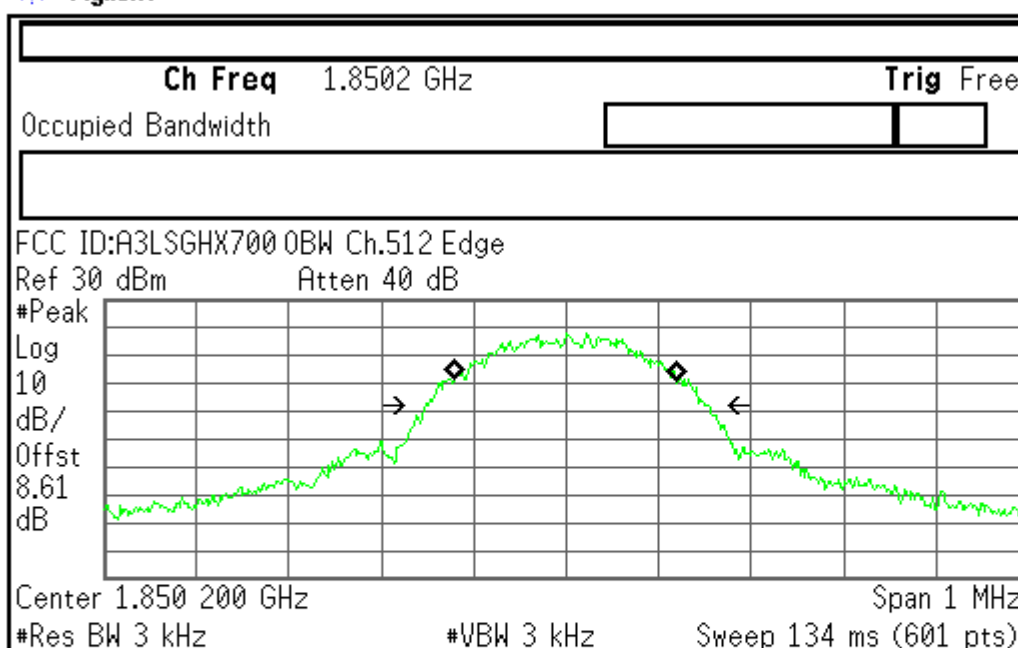

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Occupied Bandwidth 245.6671 kHz Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -629.560 Hz
x dB Bandwidth 310.672 kHz

Copyright 2000-2004 Agilent Technologies

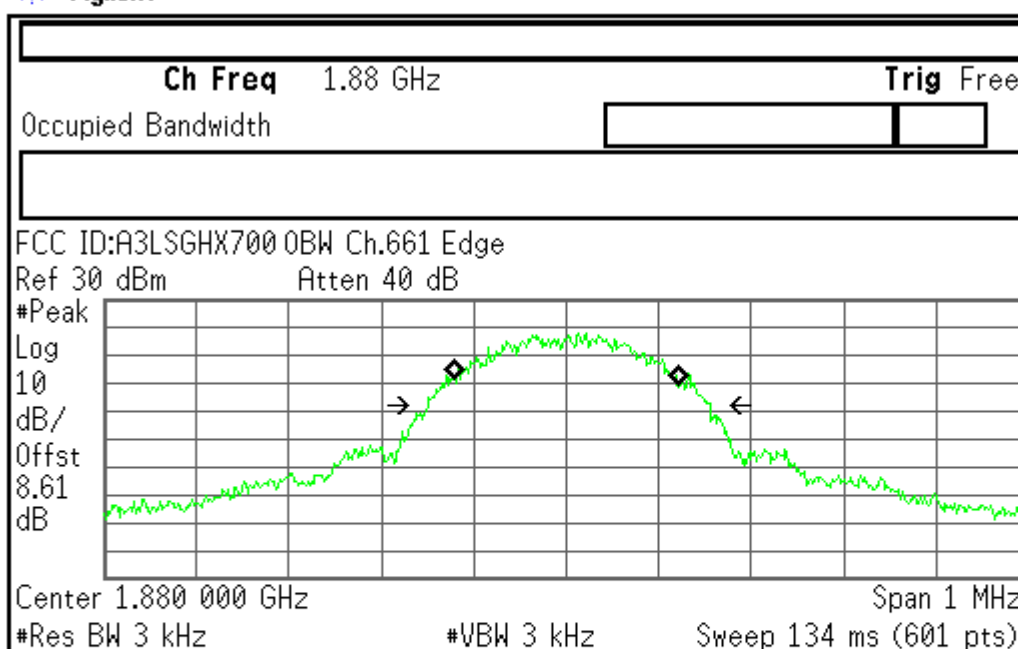

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Occupied Bandwidth 247.0806 kHz Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -21.032 Hz
x dB Bandwidth 309.033 kHz

Copyright 2000-2004 Agilent Technologies

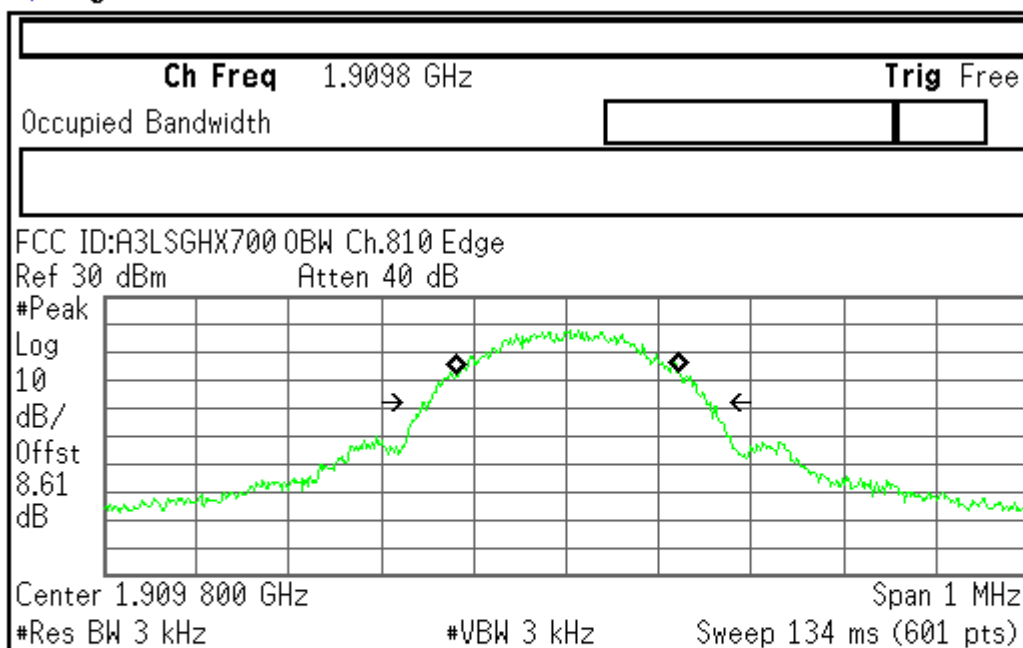

Center Freq
1.90980000 GHz

Start Freq
1.90930000 GHz

Stop Freq
1.91030000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

Occupied Bandwidth
243.8602 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 571.200 Hz
x dB Bandwidth 314.835 kHz

Copyright 2000-2004 Agilent Technologies

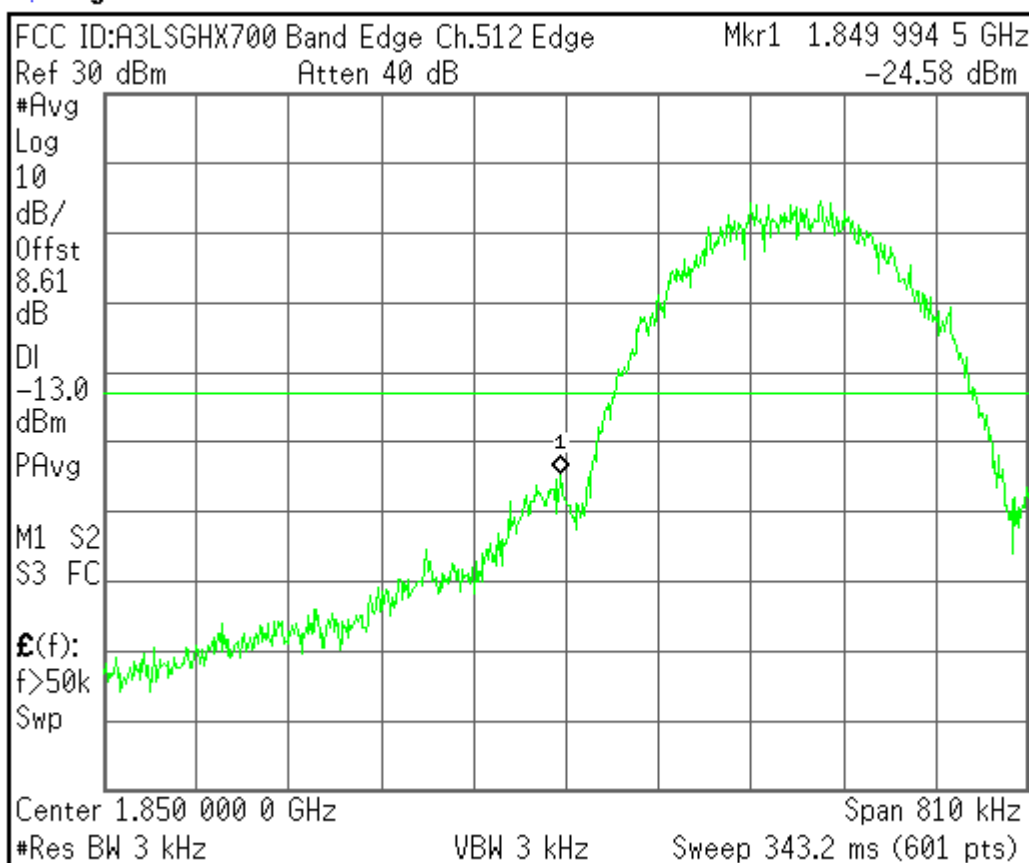

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz


Stop Freq
1.85040500 GHz

CF Step
81.00000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2004 Agilent Technologies

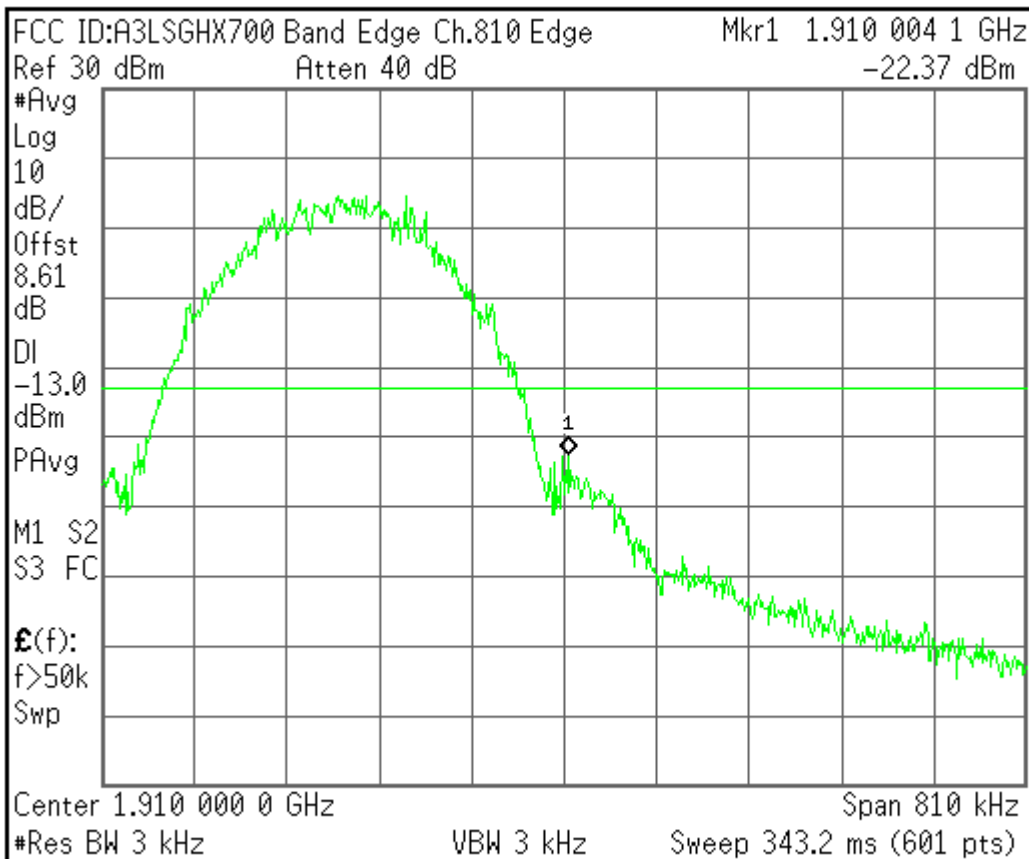

Freq/Channel

Center Freq
 1.91000000 GHz

Start Freq
 1.90959500 GHz



Stop Freq
 1.91040500 GHz

CF Step
 81.00000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

Copyright 2000-2004 Agilent Technologies

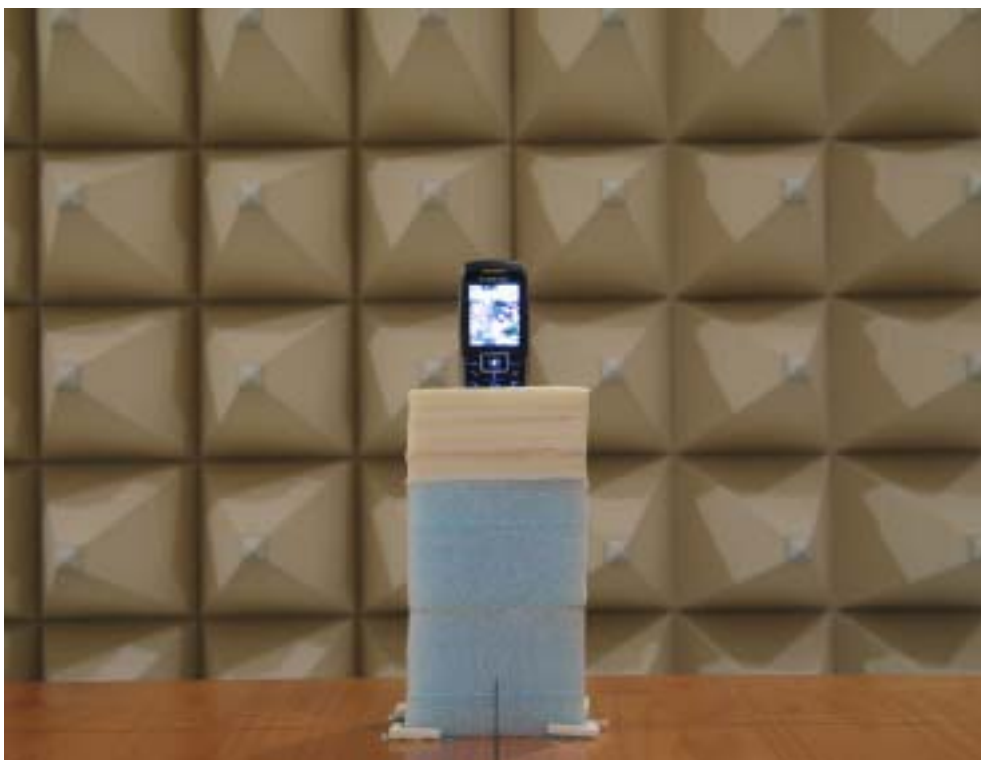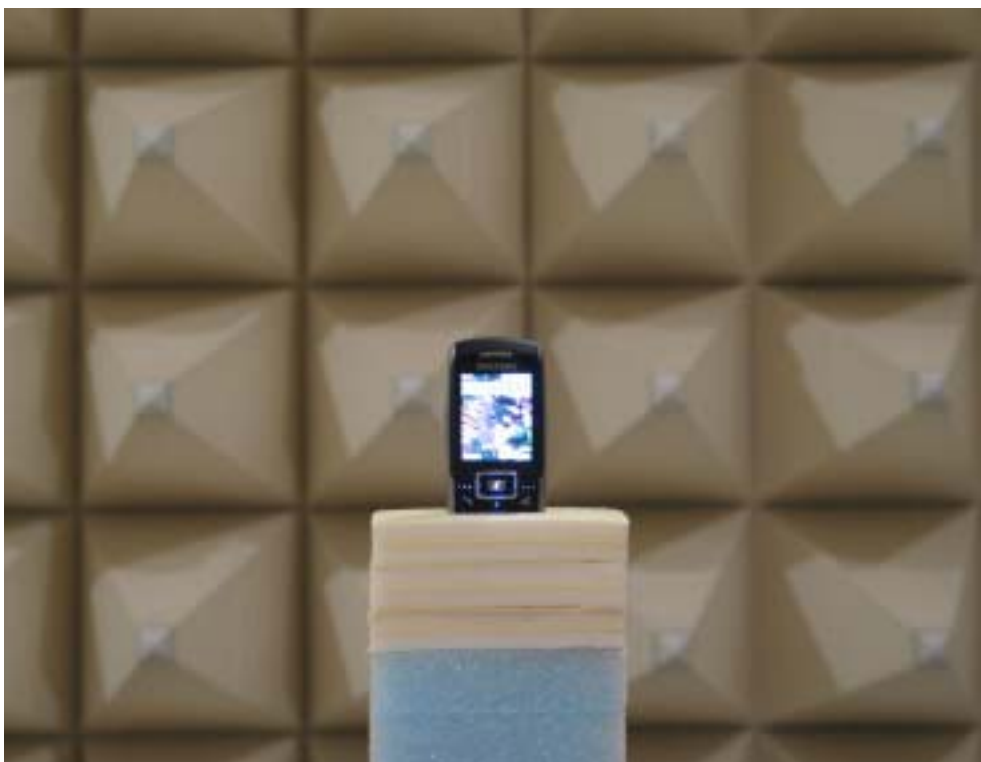

© 2005 SAMSUNG ELECTRONICS Co., Ltd.

*SAMSUNG FCC ID: A3LSGHX700
Single-Band PCS GSM/EDGE Phone With Bluetooth*

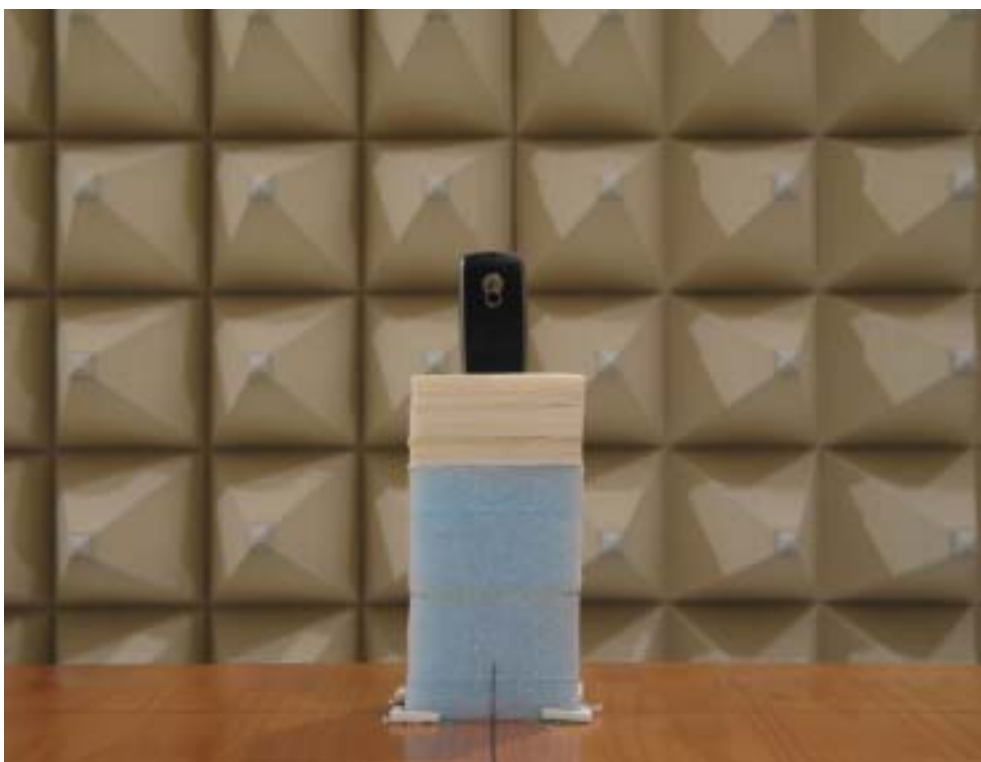


© 2005 SAMSUNG ELECTRONICS Co., Ltd.

*SAMSUNG FCC ID: A3LSGHX700
Single-Band PCS GSM/EDGE Phone With Bluetooth*




© 2005 SAMSUNG ELECTRONICS Co., Ltd.

*SAMSUNG FCC ID: A3LSGHX700
Single-Band PCS GSM/EDGE Phone With Bluetooth*

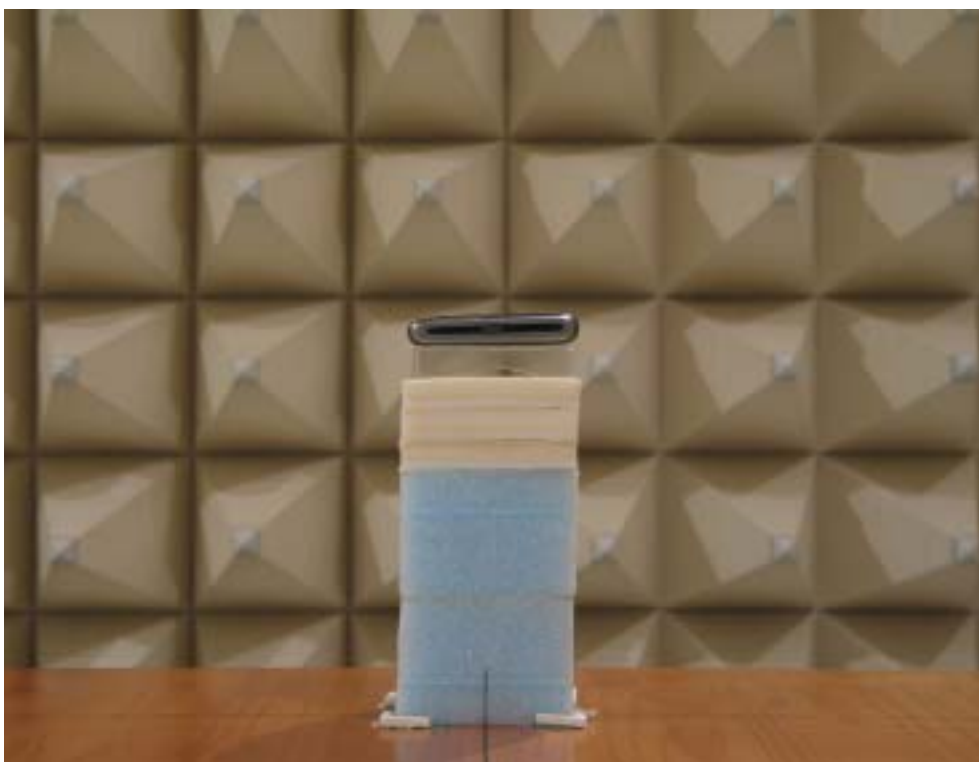

© 2005 SAMSUNG ELECTRONICS Co., Ltd.

*SAMSUNG FCC ID: A3LSGHX700
Single-Band PCS GSM/EDGE Phone With Bluetooth*

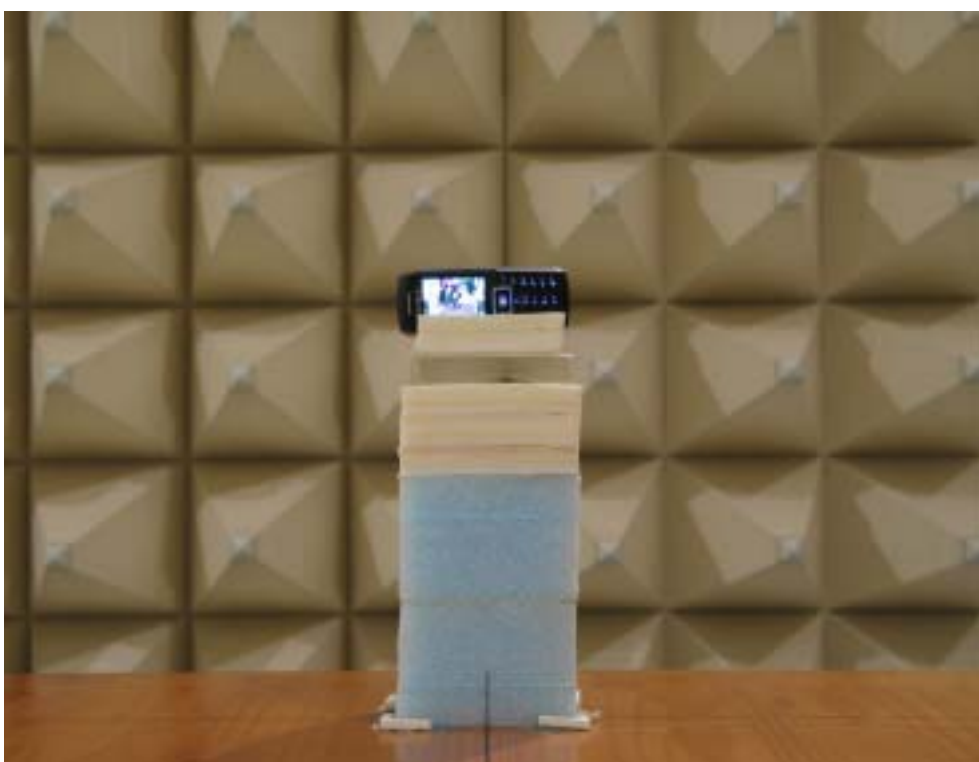

© 2005 SAMSUNG ELECTRONICS Co., Ltd.

SAMSUNG FCC ID: A3LSGHX700
Single-Band PCS GSM/EDGE Phone With Bluetooth



© 2005 SAMSUNG ELECTRONICS Co., Ltd.

*SAMSUNG FCC ID: A3LSGHX700
Single-Band PCS GSM/EDGE Phone With Bluetooth*