



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
416, Maetan 3-dong, Yeongtong-gu, Suwon-si
Gyeonggi-do, 443-742
Republic of Korea

Date of Testing:

10/15/12 - 10/23/12

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1210111479-R2.A3L

FCC ID:

A3LSHVE230S

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

DUT Type:

Portable Tablet

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SHV-E230S

Band & Mode	Tx Frequency	Conducted Power [dBm]	SAR
			1 gm Body (W/kg)
UMTS 850	826.40 - 846.60 MHz	22.02	0.34
GSM/GPRS 1900	1850.20 - 1909.80 MHz	24.67	0.78
UMTS 1900	1852.4 - 1907.6 MHz	22.35	1.00
2.4 GHz WLAN	2412 - 2462 MHz	13.37	1.10
5.8 GHz WLAN	5745 - 5825 MHz	11.60	0.50
5.2 GHz WLAN	5180 - 5240 MHz	11.57	0.36
5.3 GHz WLAN	5260 - 5320 MHz	11.48	0.38
5.5 GHz WLAN	5500 - 5700 MHz	11.70	0.79
Bluetooth	2402 - 2480 MHz	11.66	N/A
Simultaneous SAR per KDB 690783 D01:			1.56

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.

This revised Test Report (S/N: 0Y1210111479-R2.A3L) supersedes and replaces the previously issued test report on the same subject DUT for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001), IEEE 1528-2003 and in applicable Industry Canada Radio Standards Specifications (RSS); for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 1 of 37

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	INTRODUCTION	6
3	SAR MEASUREMENT SETUP	7
4	DOSIMETRIC ASSESSMENT	8
5	FCC RF EXPOSURE LIMITS.....	9
6	FCC MEASUREMENT PROCEDURES.....	10
7	SAR TABLET TESTING	13
8	RF CONDUCTED POWERS.....	14
9	SYSTEM VERIFICATION.....	20
10	SAR DATA SUMMARY	22
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	25
12	EQUIPMENT LIST	32
13	MEASUREMENT UNCERTAINTIES	33
14	CONCLUSION.....	35
15	REFERENCES	36

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 2 of 37

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Tx Frequency
UMTS 850	826.40 - 846.60 MHz
GSM/GPRS 1900	1850.20 - 1909.80 MHz
UMTS 1900	1852.4 - 1907.6 MHz
2.4 GHz WLAN	2412 - 2462 MHz
5.8 GHz WLAN	5745 - 5825 MHz
5.2 GHz WLAN	5180 - 5240 MHz
5.3 GHz WLAN	5260 - 5320 MHz
5.5 GHz WLAN	5500 - 5700 MHz
Bluetooth	2402 - 2480 MHz

1.2 DUT Antenna Locations

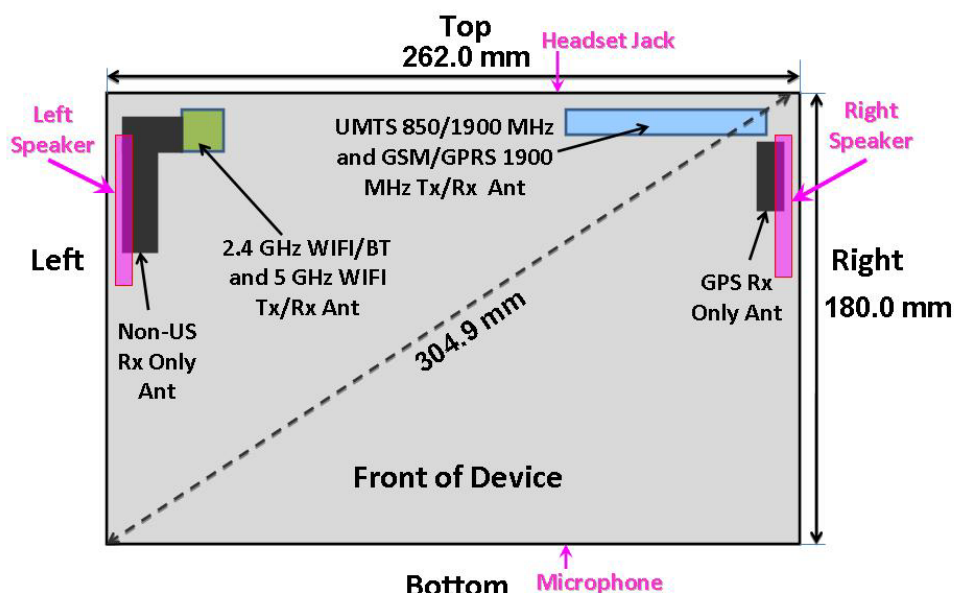


Figure 1-1
DUT Antenna Locations

Per KDB 616217 DR01, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only.

1.3 Simultaneous Transmission Capabilities

According to KDB 648474, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-2 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

FCC ID: A3LSHVE230S	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SAMSUNG	Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 3 of 37



Figure 1-2
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to KDB 447498 3) procedures.

Table 1-1
Possible Simultaneous Transmission Scenarios Supported by DUT

NO.	Capable Transmit Configurations	Body	Note
		KDB 447498	
1	1900Mhz GSM Voice + 2.4 GHz WIFI	Tablet Back & Edges per Apr.& Oct. 2011 Workshop	Voice and WIFI Data(Client)
2	1900Mhz GSM Voice + 5 GHz WIFI	Tablet Back & Edges per Apr.& Oct. 2011 Workshop	Voice and WIFI Data(Client)
3	850/1900Mhz UMTS Voice + 2.4 GHz WIFI	Tablet Back & Edges per Apr.& Oct. 2011 Workshop	Voice and WIFI Data(Client)
4	850/1900Mhz UMTS Voice + 5 GHz WIFI	Tablet Back & Edges per Apr.& Oct. 2011 Workshop	Voice and WIFI Data(Client)
5	1900Mhz GPRS DATA + 2.4 GHz WIFI	Tablet Back & Edges per Apr.& Oct. 2011 Workshop	GPRS Data and WIFI Data(Hotspot)
6	850/1900Mhz UMTS DATA + 2.4 GHz WIFI	Tablet Back & Edges per Apr.& Oct. 2011 Workshop	UMTS Data and WIFI Data(Hotspot)
7	1900Mhz GPRS DATA + 5 GHz WIFI	N/A	Not supported by S/W
8	850/1900Mhz UMTS DATA + 5 GHz WIFI	N/A	Not supported by S/W

Notes:

1. This model is not a master device in 5GHz WiFi.
So this model is not capable of 5GHz WiFi hotspot via software that cannot be changed by the end-user for all 5GHz bands.
2. FCC ID for this model is A3LSHVE230S
3. Hotspot and voice-call cannot be simultaneously activated both of 2G/3G.
First, voice-call is coming when Hotspot is on, hotspot goes deactivate. And hotspot goes back activate when voice call is finished.
Second, voice-call(2G/3G) is hanging on, Hotspot cannot be activated by S/W until voice-call will be finished.

1.4 SAR Test Exclusions Applied

(A) WIFI/BT

2.4 GHz and 5 GHz WIFI and Bluetooth share the same antenna path and cannot transmit simultaneously.

The separation between the main antenna and the Bluetooth/WLAN antenna is 155.2 mm.
RF Conducted Power of Bluetooth Tx is 14.655 mW (Please refer to the EMC DSS Report for a full set of Bluetooth conducted powers). RF Conducted Power of WLAN Tx is 21.979 mW.

Per KDB Publication 447498 4) b), SAR is not required when the average output power is less than 60/f(GHz). Therefore, **Bluetooth SAR was not required** since the maximum conducted power of Bluetooth Tx is 14.655 mW. 2.4 GHz WLAN SAR was also not required but additionally tested and included per the applicant.

(B) Licensed Transmitter(s)

This model does not support Simultaneous Voice and Data for the licensed transmitter in any modes except in UMTS that allows Multi-RAB transmissions that share voice and data operations on a single physical channel.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 4 of 37

GSM/GPRS DTM is not supported. Therefore GSM Voice cannot transmit simultaneously with GPRS Data.

This device is only capable of QPSK HSUPA in the uplink, but is capable of HSPA+ in the downlink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01.

When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.

1.5 Power Reduction for SAR

Proximity Sensors were utilized in the device for SAR purposes. April/October 2011 TCB Workshop Notes and KDB 616217 DR01 procedures regarding power reduction using power sensors were used for guidance for SAR Testing. See Appendix E for more information.

1.6 Guidance Applied

- FCC KDB 941225 (2G/3G)
- FCC KDB 248227 (802.11)
- FCC KDB 865664 (5 GHz)
- FCC KDB 447498 Section 4 (Tablet SAR Considerations, Simultaneous SAR)
- April/October 2011 TCB Workshop Notes for RF Exposure and Sensors with Power Reduction
- FCC KDB 616217 DR01 (Power Reduction)

1.7 Samples Used for SAR Testing

Two samples with identical hardware, which are within operational tolerances expected for production units, were used to facilitate SAR testing only. For maximum power samples, power reduction was disabled via software (only available to the manufacturer - end user cannot disable power reduction) to ensure the device was always transmitting at maximum power when testing at a conservative distance. All reduced power samples were tuned to the reduced power levels. Power reduction was disabled via software (only available from the manufacturer) on this device to ensure the device was always transmitting at reduced power and to confirm reduced power levels.

Table 1-2
SAR Test Sample Serial Numbers

Mode / Band	Target Power [dBm]	Sample Serial Number
UMTS 850 MHz	22.0	FCC Max Power #1
	16.0	FCC Grip Activated #2
GPRS 1900 MHz	24.5	FCC Max Power #2
	18.0	FCC Grip Activated #2
UMTS 1900 MHz	22.0	FCC Max Power #1
	14.5	FCC Grip Activated #1
2.4 GHz WLAN	13.0	FCC Max Power #2
5 GHz WLAN	11.5	FCC Max Power #1

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 5 of 37

2

INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 6 of 37

3 SAR MEASUREMENT SETUP

3.1 Automated SAR Measurement System

Measurements are performed using the DASY automated dosimetric SAR assessment system. The DASY is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the SAM phantom containing the head or body equivalent material. The robot is a six-axis industrial robot, performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). See www.speag.com for more information about the specification of the SAR assessment system.



Figure 3-1
SAR Measurement System



Figure 3-2
Near-Field Probe

Table 3-1
Composition of the Tissue Equivalent Matter

Frequency (MHz)	835	1900	2450	5200-5800
Tissue	Body	Body	Body	Body
Ingredients (% by weight)				
Bactericide	0.1			
DGBE		29.44	26.7	
HEC	1			
NaCl	0.94	0.39	0.1	
Sucrose	44.9			
Polysorbate (Tween) 80				20
Water	53.06	70.17	73.2	80

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 7 of 37

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head interface and the horizontal grid resolution was 15mm and 15mm for frequencies < 3 GHz in the x and y directions respectively. When applicable, for frequencies above 3 GHz, a 10 mm by 10 mm resolution was used.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1 gram cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring at least 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.
5. For testing 5 GHz devices, finer resolution zoom scans were performed as specified by FCC SAR Measurement Requirements for 3 – 6 GHz, KDB 865664 publication. The 5 GHz zoom scan requires a minimum volume of 24mm x 24mm x 20mm and 7 x 7 x 11 points.




Figure 4-1
Sample SAR Area Scan

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 8 of 37

5 FCC RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 9 of 37

6

FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

6.1 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

6.2 SAR Measurement Conditions for UMTS

6.2.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH) are tabulated in the test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations is identified.

6.2.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

6.2.3 Procedures Used to Establish RF Signal for SAR HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically applicable to these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA without HSDPA, with an established radio link between the DUT and a communication test set with 12.2 kbps RMC mode configured in Test Loop Mode 1; and tested with HSDPA with FRC and a 12.2 kbps RMC using the highest SAR configuration in WCDMA. SAR is selectively confirmed for other physical channel configurations according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to 3GPP TS 23.121 (Release 5) and SAR must be measured according to these maximum output conditions.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 10 of 37

6.2.4 SAR Measurement Conditions for HSUPA Data Devices

SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of the KDB 941225 D01 FCC 3G document. In addition, Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher of that measured without HSPA in 12.2 kbps RMC mode or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and EDCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of the FCC 3G document.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

6.3 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 for more details.

6.3.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 11 of 37

6.3.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg or if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 12 of 37

7.1 SAR Testing for Tablet per KDB Publication 447498 Section 4

Lap-touching devices that have transmitting antennas located less than 20 cm from the body of the user require routine SAR evaluation. Such devices are considered portable, and are capable of being held to the body. Devices are to be setup according to KDB publication 447498 requirements and are configured with maximum output power during SAR assessment for a worst-case SAR evaluation.

Per KDB 447498 4) b) i), the bottom face (back of the device) is required to be tested touching the flat phantom.

Since the diagonal dimension of the device is more than 20 cm (30.49 cm), this device is a tablet.

7.2 Proximity Sensor Information

The technical description contains information about sensor size and locations. Power reduction levels are provided in Section 8 (Conducted Powers).

KDB 616217 DR01 was used as a guideline for selecting SAR test distances for this device. Since the back-off sensor activation distance for back is 13 mm, a conservative distance of 12 mm was tested for the back side at maximum power. Since the back-off sensor activation distance for top edge is 11 mm, a conservative distance of 10 mm was tested for the top edge at maximum power. Details about sensing mechanism and sensor pad location are included in the technical description. Sensor triggering distance data can be found in Appendix E.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antenna.

7.3 Display Orientation Capabilities

This device is capable of multiple display orientations supporting both portrait and landscape positions. Therefore per KDB 447498 4) b) ii) (2), SAR testing applies for the tablet edges with antennas located within 5 cm of each tablet edge closest to the user. According to KDB 447498 4) b) ii) (2), for each antenna, SAR is only required for the edge with the most conservative exposure condition.

7.4 Method of SAR Measurement with Power Reduction

This tablet was tested in accordance with KDB 616217 DR01 and April/Oct 2011 TCB workshop notes for proximity sensor and power reduction.

Based on the power-reduction activation vs. distance results for the sensors, the sample representative of the device with the sensor activated (reduced power S/N: FCC Grip Activated #1 and FCC Grip Activated #2) was tested for SAR at 0 mm for back side. For the additional SAR measurements with the sensor de-activated (max power, no power reduction S/N: FCC Max Power #1 and FCC Max Power #2) when the device is positioned away from the user, SAR evaluation is required at 12 mm (from the back side) distance from the phantom and at 10 mm (from the top edge) distance from the phantom. Since the device sensor detection mechanism is active at these distances, the power reduction was disabled via manufacturer test software, and the device was placed in maximum power transmit mode with a base station simulator under the tissue equivalent liquid- filled flat phantom at the required distances for testing.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 13 of 37

8 RF CONDUCTED POWERS

8.1 GSM/GPRS Conducted Powers

Table 8-1
Maximum GSM/GPRS Powers (Representing Proximity Sensor Inactive)

		Maximum Burst-Averaged Output Power				
		Voice	GPRS Data (GMSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot
PCS	512	28.88	28.67	26.74	25.39	24.60
	661	28.94	28.77	26.86	25.49	24.67
	810	28.90	28.80	26.84	25.32	24.58
		Calculated Maximum Frame-Averaged Output Power				
		Voice	GPRS Data (GMSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot
PCS	512	19.85	19.64	20.72	21.13	21.59
	661	19.91	19.74	20.84	21.23	21.66
	810	19.87	19.77	20.82	21.06	21.57

Table 8-2
Reduced GPRS/EDGE Powers (Representing Proximity Sensor Active)

		Maximum Burst-Averaged Output Power				
		Voice	GPRS Data (GMSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot
PCS	512	21.89	22.03	19.68	18.31	16.98
	661	21.98	22.05	19.71	18.34	16.85
	810	22.00	22.01	19.60	18.26	16.87
		Calculated Maximum Frame-Averaged Output Power				
		Voice	GPRS Data (GMSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot
PCS	512	12.86	13.00	13.66	14.05	13.97
	661	12.95	13.02	13.69	14.08	13.84
	810	12.97	12.98	13.58	14.00	13.86

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 14 of 37

Notes:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. The bolded GPRS modes were selected according to the highest frame-averaged output power table according to KDB 941225 D03.
3. CS1 coding scheme was used in GPRS output power measurements and SAR Testing as a condition where GMSK modulation was ensured. It was investigated that CS1 – CS4 settings do not have any impact on the output levels in the GPRS modes.

GSM Class: B
GPRS Multislot class: 12 (max 4 Tx Uplink slots)
EDGE Multislot class: N/A
DTM Multislot Class: N/A




Figure 8-1
Power Measurement Setup

Table 8-3
GPRS Power Reduction Summary due to the Proximity Sensor

Mode / Band	Proximity Sensor State	Voice (in dBm)	Burst Average GMSK (in dBm)			
		1 Tx Slot	1 Tx Slot	2 Tx Slots	3 Tx Slots	4 Tx Slots
GSM/GPRS 1900 MHz	Inactive	28.5	28.5	26.5	25.0	24.5
	Active	22.0	22.0	19.5	18.0	16.5

8.2 UMTS Conducted Powers

Table 8-4
Maximum UMTS Powers (Representing Proximity Sensor Inactive)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	21.95	22.02	22.10	22.34	22.35	22.29	-
99		12.2 kbps AMR	22.10	22.13	22.17	22.14	22.10	22.08	-
6	HSDPA	Subtest 1	20.90	20.92	21.06	20.28	20.35	20.33	0
6		Subtest 2	20.88	20.95	21.10	20.30	20.43	20.31	0
6		Subtest 3	20.51	20.45	20.64	19.74	19.80	19.84	0.5
6		Subtest 4	20.52	20.47	20.61	19.60	19.67	19.75	0.5
6	HSUPA	Subtest 1	20.52	20.60	20.75	19.53	19.75	19.60	0
6		Subtest 2	19.97	20.01	20.18	19.36	19.40	19.31	2
6		Subtest 3	19.65	19.75	19.87	19.28	19.22	19.29	1
6		Subtest 4	20.25	20.32	20.24	19.93	20.03	20.06	2
6		Subtest 5	20.35	20.41	20.65	20.23	20.34	20.30	0

Table 8-5
Reduced UMTS Powers (Representing Proximity Sensor Active)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	16.36	16.30	16.41	14.34	14.50	14.67	-
99		12.2 kbps AMR	16.25	16.21	16.42	14.31	14.47	14.58	-
6	HSDPA	Subtest 1	14.68	15.27	15.47	12.44	12.57	12.55	0
6		Subtest 2	14.74	15.30	15.43	12.37	12.50	12.51	0
6		Subtest 3	14.17	14.22	15.04	11.87	12.02	12.03	0.5
6		Subtest 4	14.21	14.26	15.06	11.88	11.99	12.01	0.5
6	HSUPA	Subtest 1	14.48	14.76	15.21	11.35	11.08	11.47	0
6		Subtest 2	13.30	13.41	13.87	11.38	11.47	11.50	2
6		Subtest 3	13.42	13.50	13.52	11.45	11.20	11.79	1
6		Subtest 4	14.07	14.22	14.58	11.87	11.97	11.98	2
6		Subtest 5	14.93	14.85	14.53	12.09	12.12	11.76	0

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

It is expected by the manufacturer that MPR for some HSUPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model. Detailed information is included in the operational description explaining how the MPR is applied for this model.



Figure 8-2
Power Measurement Setup

Table 8-6
UMTS Power Reduction Summary due to the Proximity Sensor

Mode / Band	Proximity Sensor State	Modulated Average (in dBm)		
		3GPP Rel 99	HSDPA	HSUPA
UMTS Band 5 (850 MHz)	Inactive	22.0	21.0	21.0
	Active	16.0	15.5	15.0
UMTS Band 2 (1900 MHz)	Inactive	22.0	20.5	20.5
	Active	14.5	12.5	12.0

8.3 WLAN Conducted Powers

Table 8-7
IEEE 802.11b Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1	13.03	13.09	13.11	13.08
802.11b	2437	6	13.37	13.39	13.42	13.42
802.11b	2462	11	12.92	12.94	13.02	12.96

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 16 of 37

Table 8-8
IEEE 802.11g Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	12.61	12.62	12.63	12.60	12.59	12.59	12.54	12.56
802.11g	2437	6	12.94	12.88	12.89	12.91	12.90	12.90	12.89	12.92
802.11g	2462	11	12.49	12.52	12.52	12.52	12.46	12.49	12.50	12.43

Table 8-9
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	20	26	39	52	58	65
802.11n	2412	1	11.46	11.42	11.47	11.40	11.48	11.44	11.40	11.41
802.11n	2437	6	11.76	11.75	11.71	11.74	11.77	11.72	11.71	11.67
802.11n	2462	11	11.36	11.31	11.33	11.34	11.30	11.26	11.27	11.28

Table 8-10
IEEE 802.11a Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36*	11.55	11.66	11.65	11.58	11.63	11.65	11.62	11.60
802.11a	5200	40	11.57	11.45	11.58	11.50	11.60	11.59	11.61	11.47
802.11a	5220	44	11.56	11.58	11.57	11.56	11.55	11.51	11.55	11.58
802.11a	5240	48*	11.47	11.57	11.57	11.53	11.54	11.53	11.49	11.58
802.11a	5260	52*	11.38	11.51	11.36	11.40	11.37	11.39	11.39	11.41
802.11a	5280	56	11.48	11.33	11.49	11.47	11.40	11.38	11.40	11.43
802.11a	5300	60	11.40	11.32	11.42	11.37	11.38	11.47	11.38	11.44
802.11a	5320	64*	11.34	11.34	11.42	11.39	11.52	11.37	11.47	11.42
802.11a	5500	100	11.62	11.58	11.60	11.59	11.64	11.64	11.69	11.69
802.11a	5520	104*	11.61	11.67	11.67	11.59	11.62	11.64	11.69	11.74
802.11a	5540	108	11.56	11.61	11.60	11.64	11.65	11.66	11.71	11.67
802.11a	5560	112	11.61	11.60	11.60	11.67	11.59	11.67	11.67	11.71
802.11a	5580	116*	11.60	11.46	11.51	11.52	11.74	11.61	11.69	11.77
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	11.70	11.67	11.64	11.64	11.64	11.75	11.73	11.69
802.11a	5680	136*	11.59	11.63	11.63	11.69	11.76	11.70	11.71	11.65
802.11a	5700	140	11.62	11.57	11.61	11.62	11.76	11.71	11.74	11.67
802.11a	5745	149*	11.52	11.58	11.57	11.57	11.60	11.67	11.63	11.65
802.11a	5765	153	11.57	11.57	11.64	11.60	11.53	11.67	11.63	11.66
802.11a	5785	157*	11.60	11.61	11.60	11.67	11.65	11.58	11.73	11.64
802.11a	5805	161*	11.57	11.65	11.54	11.55	11.60	11.56	11.56	11.70
802.11a	5825	165	11.58	11.69	11.72	11.57	11.65	11.62	11.63	11.80

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band. (*) – indicates default channels per KDB Publication 248227. When the adjacent channels are higher in power then the default channels, these “required channels” are considered instead of the default channels for SAR testing.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet	Page 17 of 37	

Table 8-11
IEEE 802.11n (20 MHz Bandwidth) Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	20	26	39	52	58	65
802.11n	5180	36*	10.56	10.59	10.61	10.62	10.63	10.68	10.74	10.61
802.11n	5200	40	10.52	10.56	10.56	10.59	10.63	10.67	10.59	10.71
802.11n	5220	44	10.43	10.50	10.53	10.52	10.61	10.67	10.58	10.62
802.11n	5240	48*	10.56	10.55	10.60	10.55	10.53	10.58	10.53	10.66
802.11n	5260	52*	10.48	10.50	10.59	10.54	10.56	10.60	10.53	10.63
802.11n	5280	56	10.41	10.48	10.49	10.57	10.50	10.51	10.62	10.59
802.11n	5300	60	10.46	10.50	10.48	10.52	10.66	10.54	10.63	10.52
802.11n	5320	64*	10.49	10.57	10.57	10.49	10.58	10.60	10.51	10.62
802.11n	5500	100	10.73	10.55	10.65	10.59	10.66	10.72	10.61	10.71
802.11n	5520	104*	10.68	10.72	10.68	10.57	10.61	10.63	10.74	10.75
802.11n	5540	108	10.57	10.62	10.60	10.62	10.63	10.64	10.56	10.66
802.11n	5560	112	10.63	10.54	10.57	10.59	10.61	10.61	10.68	10.60
802.11n	5580	116*	10.50	10.57	10.53	10.60	10.65	10.58	10.71	10.52
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	10.59	10.54	10.52	10.76	10.59	10.61	10.52	10.67
802.11n	5680	136*	10.48	10.58	10.60	10.63	10.64	10.61	10.55	10.64
802.11n	5700	140	10.68	10.61	10.47	10.64	10.50	10.64	10.48	10.54
802.11n	5745	149*	10.71	10.45	10.44	10.49	10.60	10.52	10.63	10.64
802.11n	5765	153	10.47	10.53	10.59	10.49	10.62	10.56	10.54	10.49
802.11n	5785	157*	10.56	10.55	10.53	10.55	10.65	10.71	10.45	10.53
802.11n	5805	161*	10.49	10.54	10.59	10.42	10.48	10.45	10.61	10.62
802.11n	5825	165	10.45	10.59	10.45	10.58	10.51	10.56	10.59	10.49

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Bands. (*) – indicates default channels per KDB Publication 248227. When the adjacent channels are higher in power then the default channels, these “required channels” are considered instead of the default channels for SAR testing.

Table 8-12
IEEE 802.11n (40 MHz Bandwidth) Average RF Power

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5190	38	10.80	10.91	10.80	10.87	10.91	10.91	10.87	10.90
802.11n	5230	46	10.73	10.87	10.78	10.72	10.82	10.80	10.96	10.94
802.11n	5270	54	10.70	10.93	10.92	10.70	10.89	10.81	10.78	10.90
802.11n	5310	62	10.69	10.69	10.82	10.77	10.65	10.69	10.90	10.76
802.11n	5510	102	10.85	10.81	10.96	10.88	10.94	10.85	10.95	10.88
802.11n	5550	110	10.79	10.83	10.85	10.91	10.89	10.87	10.87	11.06
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	10.74	10.94	10.79	10.88	10.81	10.91	10.99	10.89
802.11n	5755	151	10.85	10.81	10.82	10.87	10.69	10.88	10.90	10.99
802.11n	5795	159	10.87	10.87	10.78	10.77	10.88	10.83	10.76	10.71

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Bands.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet	Page 18 of 37	

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz Bandwidth and 40 MHz Bandwidth) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.




Figure 8-3
Power Measurement Setup

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 19 of 37

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
10/15/2012	835B	22.0	820	0.969	55.52	0.969	55.284	0.00%	0.43%
			835	0.984	55.43	0.970	55.200	1.44%	0.42%
			850	0.999	55.27	0.988	55.154	1.11%	0.21%
10/16/2012	1900B	23.1	1850	1.514	53.04	1.520	53.300	-0.39%	-0.49%
			1880	1.539	53.02	1.520	53.300	1.25%	-0.53%
			1910	1.573	52.84	1.520	53.300	3.49%	-0.86%
10/23/2012	1900B	22.1	1850	1.491	52.58	1.520	53.300	-1.91%	-1.35%
			1880	1.539	52.39	1.520	53.300	1.25%	-1.71%
			1910	1.595	52.34	1.520	53.300	4.93%	-1.80%
10/22/2012	2450B	21.2	2401	1.974	50.65	1.903	52.765	3.73%	-4.01%
			2450	2.043	50.44	1.950	52.700	4.77%	-4.29%
			2499	2.100	50.16	2.019	52.638	4.01%	-4.71%
10/18/2012	5200B-5800B	24.3	5200	5.224	48.46	5.299	49.014	-1.42%	-1.13%
			5280	5.355	48.13	5.393	48.879	-0.70%	-1.53%
			5500	5.671	47.71	5.650	48.580	0.37%	-1.79%
			5660	5.941	47.22	5.837	48.363	1.78%	-2.36%
			5700	6.018	47.20	5.880	48.275	2.35%	-2.23%
			5785	6.136	46.96	5.982	48.242	2.57%	-2.66%
			5800	6.175	46.90	6.000	48.200	2.92%	-2.70%

Note: KDB Publication 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50 MHz of the DUT frequencies.

The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies (per IEEE 1528 6.6.1.2). The SAR test plots may slightly differ from the table above since the DASY software rounds to three significant digits.

Probe calibration used within ± 100 MHz of the test frequency in either 5.725 - 5.85 or 5.47-5.725 GHz is acceptable per KDB Publication 865664 since the design of the SAR probe supports the extended frequency, provided the DASY software version recommended is used for the tests, and the expanded calibration uncertainty ($k=2$) is less than or equal to 15% (See SAR probe calibration certificate for this information). The dielectric and conductivities measured are within 10% and 5% respectively of the target parameters specified in Supplement C 01-01.

9.2 Measurement Procedure for Tissue verification

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 20 of 37

9.3 Test System Verification

Prior to assessment, the system is verified to $\pm 10\%$ of the manufacturer SAR measurement on the reference dipole at the time of calibration.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED											
Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation (%)
835	Body	10/15/2012	23.0	22.1	0.100	4d133	3209	1.02	9.600	10.200	6.25%
1900	Body	10/16/2012	21.8	21.7	0.104	502	3209	4.24	38.900	40.966	5.31%
1900	Body	10/23/2012	23.7	21.2	0.100	5d148	3213	4.06	39.100	40.600	3.84%
2450	Body	10/22/2012	21.7	21.5	0.100	882	3288	5.22	50.300	52.200	3.78%
5200	Body	10/18/2012	23.8	22.6	0.100	1057	3561	7.65	73.400	76.500	4.22%
5500	Body	10/18/2012	23.9	22.8	0.100	1057	3561	7.80	78.900	78.000	-1.14%
5800	Body	10/18/2012	24.0	22.9	0.100	1057	3561	7.07	74.300	70.700	-4.85%

Note: Per KDB Publication 865664, when a reference dipole is not defined within ± 100 MHz of the test frequency, the system verification may be conducted within ± 200 MHz of the center frequency of the measurement frequencies if the SAR probe calibration is valid and the same tissue-equivalent matter is used for verification and test measurements.

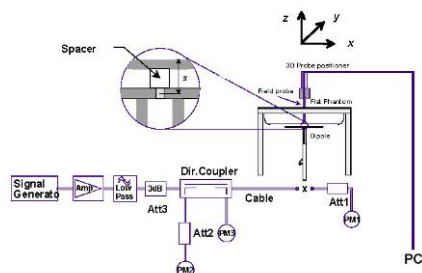


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 21 of 37

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
Licensed Transmitter Body SAR Data

MEASUREMENT RESULTS											
FREQUENCY		Mode	Service	Conducted Power [dBm]	Target Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Side	SAR (1g) (W/kg)
MHz	Ch.										
836.60	4183	WCDMA 850	RMC	22.02	22.0	0.09	1.2 cm	FCC Max Power #1	N/A	back	0.235
836.60	4183	WCDMA 850	RMC	22.02	22.0	-0.13	1.0 cm	FCC Max Power #1	N/A	top	0.019
836.60	4183	WCDMA 850	RMC	22.02	22.0	-0.02	0.0 cm	FCC Max Power #1	N/A	right	0.239
836.60	4183	WCDMA 850	RMC	16.30	16.0	0.01	0.0 cm	FCC Grip Activated #2	N/A	back*	0.343
836.60	4183	WCDMA 850	RMC	16.30	16.0	-0.04	0.0 cm	FCC Grip Activated #2	N/A	top*	0.065
1880.00	661	GSM 1900	GPRS	24.67	24.5	-0.08	1.2 cm	FCC Max Power #2	4	back	0.565
1880.00	661	GSM 1900	GPRS	24.67	24.5	0.04	1.0 cm	FCC Max Power #2	4	top	0.381
1880.00	661	GSM 1900	GPRS	24.67	24.5	0.03	0.0 cm	FCC Max Power #2	4	right	0.267
1880.00	661	GSM 1900	GPRS	18.34	18.0	0.11	0.0 cm	FCC Grip Activated #2	3	back*	0.776
1880.00	661	GSM 1900	GPRS	18.34	18.0	0.03	0.0 cm	FCC Grip Activated #2	3	top*	0.257
1880.00	9400	WCDMA 1900	RMC	22.35	22.0	0.03	1.2 cm	FCC Max Power #1	N/A	back	0.461
1880.00	9400	WCDMA 1900	RMC	22.35	22.0	-0.01	1.0 cm	FCC Max Power #1	N/A	top	0.077
1880.00	9400	WCDMA 1900	RMC	22.35	22.0	0.09	0.0 cm	FCC Max Power #1	N/A	right	0.394
1852.40	9262	WCDMA 1900	RMC	14.30	14.5	0.01	0.0 cm	FCC Grip Activated #1	N/A	back*	0.902
1880.00	9400	WCDMA 1900	RMC	14.45	14.5	-0.07	0.0 cm	FCC Grip Activated #1	N/A	back*	0.996
1907.60	9538	WCDMA 1900	RMC	14.54	14.5	-0.02	0.0 cm	FCC Grip Activated #1	N/A	back*	0.827
1880.00	9400	WCDMA 1900	RMC	14.45	14.5	-0.03	0.0 cm	FCC Grip Activated #1	N/A	top*	0.387
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: Asterisk (*) denotes power reduction activated.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 22 of 37

Table 10-2
WLAN Body SAR Data

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	SAR (1g)
MHz	Ch.									(W/kg)
2412	1	IEEE 802.11b	DSSS	13.03	0.02	0.0 cm	FCC Max Power #2	1	back	0.908
2437	6	IEEE 802.11b	DSSS	13.37	0.06	0.0 cm	FCC Max Power #2	1	back	1.100
2462	11	IEEE 802.11b	DSSS	12.92	-0.03	0.0 cm	FCC Max Power #2	1	back	0.929
2437	6	IEEE 802.11b	DSSS	13.37	-0.07	0.0 cm	FCC Max Power #2	1	top	0.256
2437	6	IEEE 802.11b	DSSS	13.37	-0.10	0.0 cm	FCC Max Power #2	1	left	0.104
5785	157	IEEE 802.11a	OFDM	11.60	0.15	0.0 cm	FCC Max Power #1	6	back	0.321
5765	153	IEEE 802.11a	OFDM	11.57	-0.17	0.0 cm	FCC Max Power #1	6	top	0.499
5785	157	IEEE 802.11a	OFDM	11.60	-0.06	0.0 cm	FCC Max Power #1	6	top	0.496
5825	165	IEEE 802.11a	OFDM	11.58	-0.11	0.0 cm	FCC Max Power #1	6	top	0.417
5785	157	IEEE 802.11a	OFDM	11.60	-0.12	0.0 cm	FCC Max Power #1	6	left	0.013
5200	40	IEEE 802.11a	OFDM	11.57	0.03	0.0 cm	FCC Max Power #1	6	back	0.290
5220	44	IEEE 802.11a	OFDM	11.56	0.07	0.0 cm	FCC Max Power #1	6	back	0.191
5200	40	IEEE 802.11a	OFDM	11.57	-0.02	0.0 cm	FCC Max Power #1	6	top	0.357
5200	40	IEEE 802.11a	OFDM	11.57	0.07	0.0 cm	FCC Max Power #1	6	left	0.017
5280	56	IEEE 802.11a	OFDM	11.48	0.13	0.0 cm	FCC Max Power #1	6	back	0.380
5280	56	IEEE 802.11a	OFDM	11.48	0.09	0.0 cm	FCC Max Power #1	6	top	0.377
5300	60	IEEE 802.11a	OFDM	11.40	0.04	0.0 cm	FCC Max Power #1	6	top	0.371
5280	56	IEEE 802.11a	OFDM	11.48	-0.05	0.0 cm	FCC Max Power #1	6	left	0.031
5500	100	IEEE 802.11a	OFDM	11.62	0.19	0.0 cm	FCC Max Power #1	6	back	0.570
5560	112	IEEE 802.11a	OFDM	11.61	0.11	0.0 cm	FCC Max Power #1	6	back	0.584
5660	132	IEEE 802.11a	OFDM	11.70	-0.19	0.0 cm	FCC Max Power #1	6	back	0.646
5500	100	IEEE 802.11a	OFDM	11.62	0.08	0.0 cm	FCC Max Power #1	6	top	0.688
5560	112	IEEE 802.11a	OFDM	11.61	-0.04	0.0 cm	FCC Max Power #1	6	top	0.683
5660	132	IEEE 802.11a	OFDM	11.70	-0.15	0.0 cm	FCC Max Power #1	6	top	0.788
5660	132	IEEE 802.11a	OFDM	11.70	0.17	0.0 cm	FCC Max Power #1	6	left	0.022
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram				

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR value with the position of the device configured for SAR testing according to KDB 447498 Section 4.
2. Batteries are fully charged for all readings.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth was at least 15.0 cm. To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 23 of 37

6. Per KDB 447498 and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
7. Per KDB Publication 447498 4) b) i) the back side and top edge are required to be tested touching the flat phantom for large sized tablet devices.
8. This device is capable of multiple display orientations supporting both portrait and landscape positions. Therefore per KDB 447498 4) b) ii) (2), SAR testing applies for the top, bottom, right and left tablet edges with antennas located within 5 cm of each tablet edge closest to the user. According to KDB 447498 4) b) ii) (2), for each antenna, SAR is required for the edge with the most conservative exposure condition.
9. Asterisk (*) denotes power reduction activated.

GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D03: The source-based time-averaged output power was evaluated for all multi-slot operations. The slot with the highest time- average output power was selected for SAR evaluation.
2. Per KDB 616217 DR01 and April 2011 TCB-FCC Workshop Notes, in addition to the 0 mm test distance required for tablet devices under KDB 447498, conservative additional test distances of 12 mm from the back side and 10 mm from the top edge were tested for SAR at maximum output power with the sensor deactivated. See Appendix E for more details.
3. GSM voice mode is limited to speaker or headset operations only. Therefore per KDB 616217 DR01, additional SAR testing for this type of voice use is not required.

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per KDB 616217 DR01 and April 2011 TCB-FCC Workshop Notes, in addition to the 0 mm test distance required for tablet devices under KDB 447498, conservative additional test distances of 12 mm from the back side and 10 mm from the top edge were tested for SAR at maximum output power with the sensor deactivated. See Appendix E for more details.

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz Bandwidth and 40 MHz Bandwidth) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. WLAN transmission was verified using an uncalibrated spectrum analyzer.
4. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel was >1.6 W/kg for some 5 GHz WLAN channels, the other default test channels in the band were additionally tested using the lowest data rate.
5. There is no power reduction for WLAN.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 24 of 37

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Simultaneous Transmission Introduction

Possible simultaneous transmissions for this device indicated in **Table 1-1** were numerically summed using standalone SAR data and are shown in the following tables.

11.2 Body Simultaneous Transmission Analysis

Table 11-1
Simultaneous Transmission Scenario 2.4 GHz WLAN (Body at 0.0 cm)

Simult Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.343	1.100	1.443	N/A
	Front	-	-	0.000	N/A
	Top	0.065	0.256	0.321	N/A
	Bottom	-	-	0.000	N/A
	Right	0.239	-	0.239	N/A
	Left	-	0.104	0.104	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.776	1.100	see note 1	0.11
	Front	-	-	0.000	N/A
	Top	0.257	0.256	0.513	N/A
	Bottom	-	-	0.000	N/A
	Right	0.267	-	0.267	N/A
	Left	-	0.104	0.104	N/A
Simult Tx	Configuration	WCDMA 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.996	1.100	see note 1	0.12
	Front	-	-	0.000	N/A
	Top	0.387	0.256	0.643	N/A
	Bottom	-	-	0.000	N/A
	Right	0.394	-	0.394	N/A
	Left	-	0.104	0.104	N/A

Note:

1. No evaluation was performed to determine aggregate 1-g SAR in the back side (at 0.0 cm) configuration as the SPLSR of the antenna pair was below 0.3 per FCC KDB Publication 447498 D01. See Section 11.3 for detailed SPLSR analysis.
2. “-” indicates configurations that were not required per KDB Publication 447498.
3. Per KDB 616217, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only. For the GPRS mode above, the calculated frame-averaged powers are higher than those of the corresponding GSM mode. Therefore, GPRS mode is a more conservative measure of SAR than GSM mode and is used to determine simultaneous SAR exclusion.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 25 of 37

Table 11-2
Simultaneous Transmission Scenario 5 GHz WLAN (Body at 0.0 cm)

Simult Tx	Configuration	WCDMA 850 SAR (W/kg)	5 GHz WLAN (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.343	0.646	0.989	N/A
	Front	-	-	0.000	N/A
	Top	0.065	0.788	0.853	N/A
	Bottom	-	-	0.000	N/A
	Right	0.239	-	0.239	N/A
	Left	-	0.031	0.031	N/A
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	5 GHz WLAN (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.776	0.646	1.422	N/A
	Front	-	-	0.000	N/A
	Top	0.257	0.788	1.045	N/A
	Bottom	-	-	0.000	N/A
	Right	0.267	-	0.267	N/A
	Left	-	0.031	0.031	N/A
Simult Tx	Configuration	WCDMA 1900 SAR (W/kg)	5 GHz WLAN (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.996	0.646	see note 1	0.09
	Front	-	-	0.000	N/A
	Top	0.387	0.788	1.175	N/A
	Bottom	-	-	0.000	N/A
	Right	0.394	-	0.394	N/A
	Left	-	0.031	0.031	N/A

Note:

1. No evaluation was performed to determine aggregate 1-g SAR in the back side (at 0.0 cm) configuration as the SPLSR of the antenna pair was below 0.3 per FCC KDB Publication 447498 D01. See Section 11.3 for detailed SPLSR analysis.
2. The above tables represent a voice/VOIP call potentially simultaneously operating with 5 GHz WLAN.
3. “-” indicates configurations that were not required per KDB Publication 447498.
4. Per KDB 616217, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only. For the GPRS mode above, the calculated frame-averaged powers are higher than those of the corresponding GSM mode. Therefore, GPRS mode is a more conservative measure of SAR than GSM mode and is used to determine simultaneous SAR exclusion.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet	Page 26 of 37	

Table 11-3
Simultaneous Transmission Scenario 2.4 GHz WLAN (Back Side at 1.2 cm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	WCDMA 850	0.235	<1.100	<1.335	N/A
Back Side	GPRS 1900	0.565	<1.100	see note 1	0.10
Back Side	WCDMA 1900	0.461	<1.100	<1.561	N/A

Note:

1. No evaluation was performed to determine aggregate 1-g SAR in the back side (at 1.2 cm) configuration as the SPLSR of the antenna pair was below 0.3 per FCC KDB Publication 447498 D01. See Section 11.3 for detailed SPLSR analysis.
2. For SAR calculations at 1.2 cm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative.
3. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
4. Per KDB 616217, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only. For the GPRS mode above, the calculated frame-averaged powers are higher than those of the corresponding GSM mode. Therefore, GPRS mode is a more conservative measure of SAR than GSM mode and is used to determine simultaneous SAR exclusion.

Table 11-4
Simultaneous Transmission Scenario 5 GHz WLAN (Back Side at 1.2 cm)

Configuration	Mode	2G/3G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	WCDMA 850	0.235	<0.646	<0.881	N/A
Back Side	GSM 1900	0.565	<0.646	<1.211	N/A
Back Side	WCDMA 1900	0.461	<0.646	<1.107	N/A

Note:

1. For SAR calculations at 1.2 cm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative and confirmed that simultaneous SAR measurements were not required.
2. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
3. Per KDB 616217, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only. For the GPRS mode above, the calculated frame-averaged powers are higher than those of the corresponding GSM mode. Therefore, GPRS mode is a more conservative measure of SAR than GSM mode and is used to determine simultaneous SAR exclusion.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet	Page 27 of 37	

Table 11-5
Simultaneous Transmission Scenario 2.4 GHz WLAN (Top Edge at 1.0 cm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Top Edge	WCDMA 850	0.019	<0.256	<0.275	N/A
Top Edge	GPRS 1900	0.381	<0.256	<0.637	N/A
Top Edge	WCDMA 1900	0.077	<0.256	<0.333	N/A

Note:

1. For SAR calculations at 1.0 cm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative and confirmed that simultaneous SAR measurements were not required.
2. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
3. Per KDB 616217, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only. For the GPRS mode above, the calculated frame-averaged powers are higher than those of the corresponding GSM mode. Therefore, GPRS mode is a more conservative measure of SAR than GSM mode and is used to determine simultaneous SAR exclusion.

Table 11-6
Simultaneous Transmission Scenario 5 GHz WLAN (Top Edge at 1.0 cm)

Configuration	Mode	2G/3G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Top Edge	WCDMA 850	0.019	<0.788	<0.807	N/A
Top Edge	GSM 1900	0.381	<0.788	<1.169	N/A
Top Edge	WCDMA 1900	0.077	<0.788	<0.865	N/A

Note:

1. For SAR calculations at 1.0 cm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative and confirmed that simultaneous SAR measurements were not required.
2. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
3. Per KDB 616217, GSM voice SAR testing was not additionally required since voice is limited to speaker or headset operations only. For the GPRS mode above, the calculated frame-averaged powers are higher than those of the corresponding GSM mode. Therefore, GPRS mode is a more conservative measure of SAR than GSM mode and is used to determine simultaneous SAR exclusion.

11.3 SPLSR Evaluation Analysis

Per FCC KDB Publication 447498, when the numerical sum of the standalone transmitters is more than 1.6 W/kg, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. Based on numerical sum SAR below the 1-g SAR limit and a separation distance of < 5 cm, when the SAR peak to location ratio for each pair of antennas is < 0.3, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1-Tx2}} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

11.3.1 Back Side at 0.0 cm

The numerical sum of the standalone SAR values was above 1.6 W/kg for the following back side (at 0.0 cm) configurations: (a) GPRS 1900 mode potentially operating with 2.4 GHz WLAN, (b) WCDMA 1900

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 28 of 37

mode potentially operating with 2.4 GHz WLAN, and (c) WCDMA 1900 mode potentially operating with 5 GHz WLAN.

Table 11-7
Peak SAR locations for back side (at 0.0 cm)

Mode/Band	x (cm)	y (cm)	z (cm)
GPRS 1900	-2.60	8.85	-20.20
WCDMA 1900	-0.60	8.25	-17.90
2.4 GHz WLAN	-3.18	-8.26	-20.40
5 GHz WLAN	-2.30	-10.40	-20.70

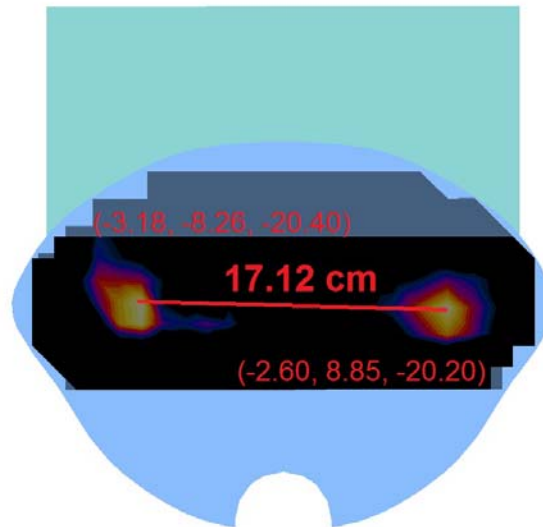


Figure 11-1
Peak SAR Location Plot of GPRS 1900 and 2.4 GHz WLAN for Back Side (at 0.0 cm)

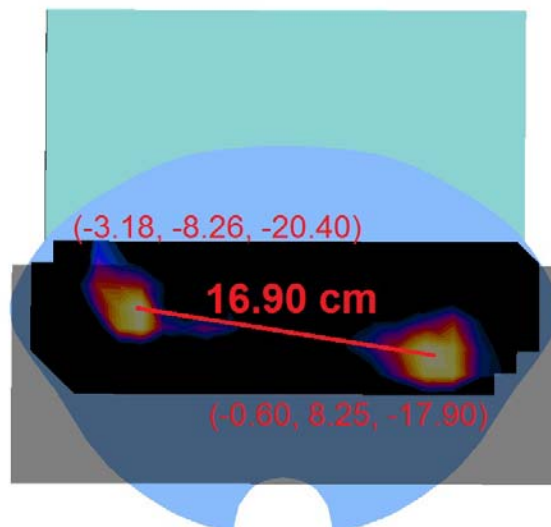


Figure 11-2
Peak SAR Location Plot of UMTS 1900 and 2.4 GHz WLAN for Back Side (at 0.0 cm)

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 29 of 37

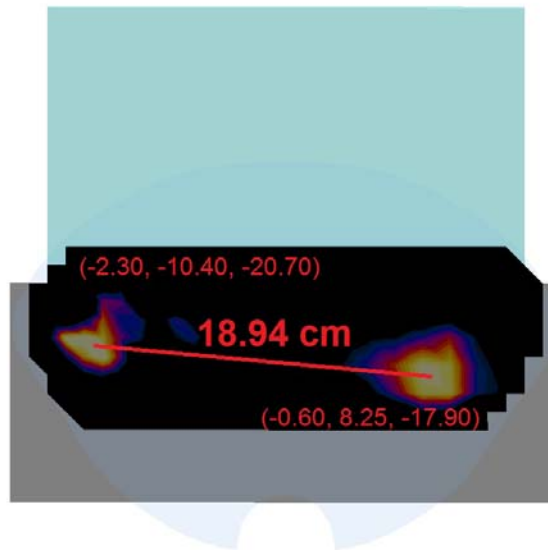


Figure 11-3
Peak SAR Location Plot of UMTS 1900 and 5 GHz WLAN for Back Side (at 0.0 cm)

Table 11-8
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (cm)	SPLSR
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) / D _{a-b}
GPRS 1900	2.4 GHz WLAN	0.776	1.100	1.876	17.12	0.11
WCDMA 1900	2.4 GHz WLAN	0.996	1.100	2.096	16.90	0.12
WCDMA 1900	5 GHz WLAN	0.996	0.646	1.642	18.94	0.09

Note: The SPLSR between the transmitter pair above was less than 0.3. Therefore, no volumetric simultaneous transmission SAR is required.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 30 of 37

11.3.2 Back Side at 1.2 cm

The numerical sum of the standalone SAR values was above 1.6 W/kg for the back side (at 1.2 cm) configuration with the GPRS 1900 mode potentially operating with 2.4 GHz WLAN.

Table 11-9
Peak SAR locations for back side (at 1.2 cm)

Mode/Band	x (cm)	y (cm)	z (cm)
GPRS 1900	-0.60	7.20	-17.90
2.4 GHz WLAN	-3.18	-8.26	-20.40

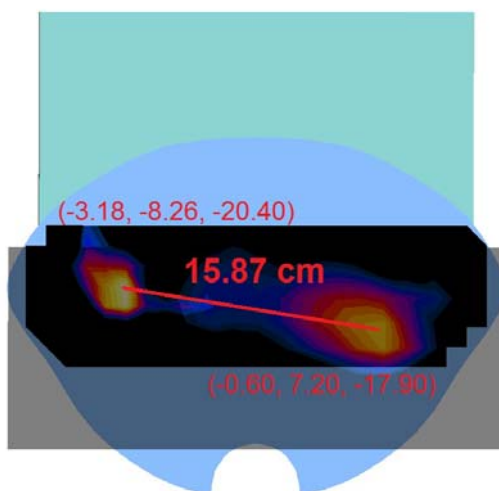


Figure 11-4
Peak SAR Location Plot of GPRS 1900 and 2.4 GHz WLAN for Back Side (at 1.2 cm)

Table 11-10
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (cm)	SPLSR
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) / D _{a-b}
GPRS 1900	2.4 GHz WLAN	0.565	<1.1	<1.665	15.87	<0.10

Note:

1. The SPLSR between the transmitter pair above was less than 0.3. Therefore, no volumetric simultaneous transmission SAR is required.
2. "<" denotes that the 0.0 cm WLAN SAR values were used for summation and ratio calculation purposes.

11.4 Simultaneous Transmission Conclusion

The above numerical summed SAR and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. No volumetric SAR summation is required per FCC KDB Publication 447498. It was confirmed that all standalone and simultaneous transmission scenarios remain compliant when scaled to the maximum output power levels.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 31 of 37

12 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	85070E	Dielectric Probe Kit	3/8/2012	Annual	3/8/2013	MY44300633
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/3/2012	Annual	4/3/2013	US37390350
Agilent	8648D	Signal Generator	4/3/2012	Annual	4/3/2013	3629U00687
Agilent	E5515C	Wireless Communications Test Set	N/A	N/A	N/A	GB43193563
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/5/2012	Annual	4/5/2013	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/4/2012	Annual	4/4/2013	JP38020182
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2012	Annual	10/10/2013	3613A00315
Amplifier Research	5S1G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	ML2438A	Power Meter	2/14/2012	Annual	2/14/2013	1190013
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	5442
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	5318
Anritsu	MT8820C	Radio Communication Tester	11/11/2011	Annual	11/11/2012	6200901190
Anritsu	ML2438A	Power Meter	2/14/2012	Annual	2/14/2013	98150041
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	2400
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	5821
Anritsu	MA24106A	USB Power Sensor	8/22/2012	Annual	8/22/2013	1231535
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M1S5A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	61220-416	Long-Stem Thermometer	2/15/2011	Biennial	2/15/2013	111331323
Control Company	61220-416	Long-Stem Thermometer	2/15/2011	Biennial	2/15/2013	111331322
Control Company	61220-416	Long-Stem Thermometer	7/1/2011	Biennial	7/1/2013	111642916
Control Company	61220-416	Long-Stem Thermometer	10/12/2011	Biennial	10/12/2013	111860820
Gigatronics	8651A	Universal Power Meter	10/10/2012	Annual	10/10/2013	8650319
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/10/2012	Annual	10/10/2013	1833460
Intelligent Weigh	PD-3000	Electronic Balance	3/27/2012	Annual	3/27/2013	11081534
Intelligent Weighing	PD-3000	Electronic Balance	6/29/2012	Annual	6/29/2013	120405017
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Rohde & Schwarz	NRVD	Dual Channel Power Meter	4/8/2011	Biennial	4/8/2013	101695
Rohde & Schwarz	CMU200	Base Station Simulator	5/22/2012	Annual	5/22/2013	109892
Rohde & Schwarz	SMI03B	Signal Generator	4/5/2012	Annual	4/5/2013	DE27259
Rohde & Schwarz	SME06	Signal Generator	10/10/2012	Annual	10/10/2013	832026
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/19/2012	Annual	9/19/2013	1323
SPEAG	D1900V2	1900 MHz SAR Dipole	2/22/2012	Annual	2/22/2013	502
SPEAG	D2450V2	2450 MHz SAR Dipole	2/7/2012	Annual	2/7/2013	882
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/24/2012	Annual	8/24/2013	1322
SPEAG	D1900V2	1900 MHz SAR Dipole	2/8/2012	Annual	2/8/2013	5d148
SPEAG	ES3DV3	SAR Probe	9/20/2012	Annual	9/20/2013	3288
SPEAG	D835V2	835 MHz SAR Dipole	2/17/2012	Annual	2/17/2013	4d133
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/19/2012	Annual	1/19/2013	1057
SPEAG	EX3DV4	SAR Probe	7/26/2012	Annual	7/26/2013	3561
SPEAG	ES3DV3	SAR Probe	4/24/2012	Annual	4/24/2013	3213
SPEAG	ES3DV3	SAR Probe	3/16/2012	Annual	3/16/2013	3209
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/19/2012	Annual	4/19/2013	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/20/2012	Annual	2/20/2013	649
Tektronix	RSA-6114A	Real Time Spectrum Analyzer	4/5/2012	Annual	4/5/2013	B010177
VWR	36934-158	Wall-Mounted Thermometer	9/30/2011	Biennial	9/30/2013	111859323
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286460
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886414
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886443
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286454

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, attenuator, coupler, amplifier or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 32 of 37

13 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSHVE230S	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 33 of 37

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 34 of 37

14 CONCLUSION

14.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 35 of 37

15 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 36 of 37

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Measurement Procedures for 3G Devices KDB Publication 941225
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publication 648474
- [29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB Publication 450824
- [30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB Publication 616217
- [31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB Publication 865664
- [32] FCC Mobile Portable RF Exposure Procedure, KDB Publication 447498
- [33] FCC SAR Procedures for Dongle Transmitters, KDB Publication 447498
- [34] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225.
- [36] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.
- [37] FCC Hot Spot SAR v01, KDB Publication 941225 D06.

FCC ID: A3LSHVE230S		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1210111479-R2.A3L	Test Dates: 10/15/12 - 10/23/12	DUT Type: Portable Tablet		Page 37 of 37

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 55.413$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 850, Body SAR, Back side, Mid.ch


Area Scan (7x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.502 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.153 W/kg

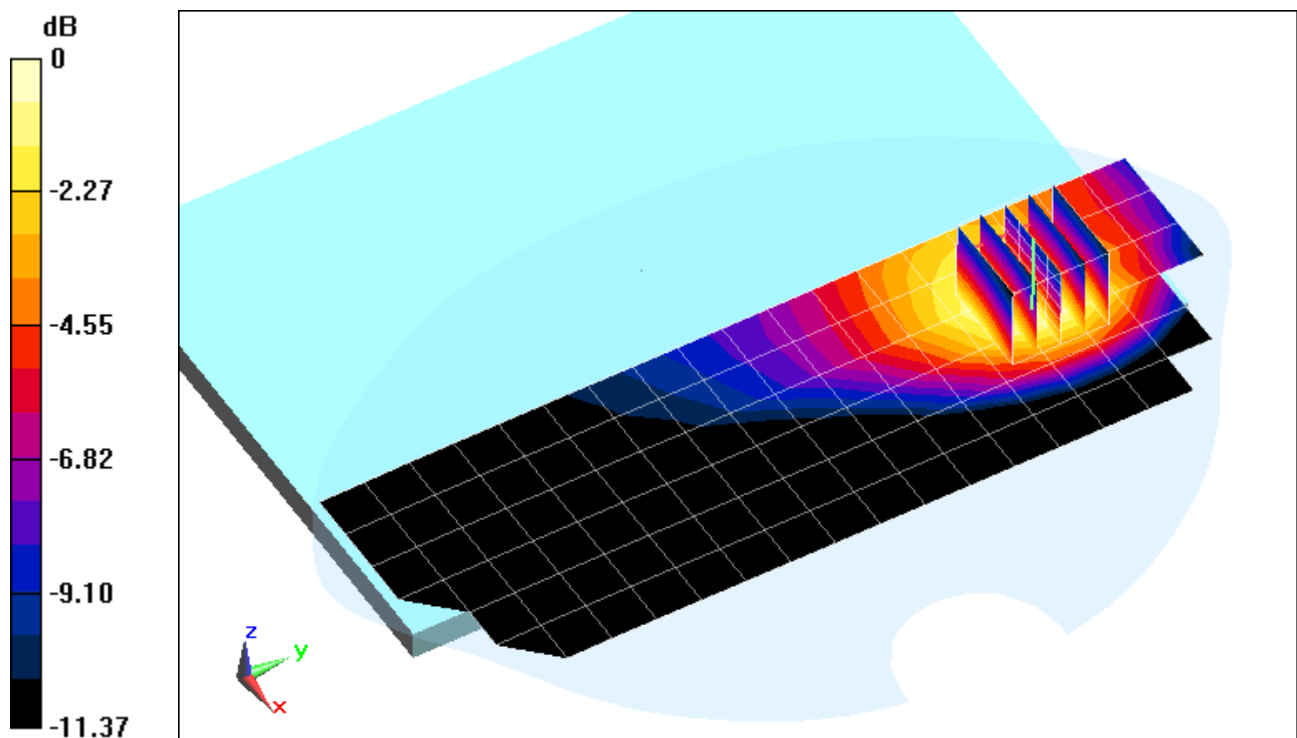

0 dB = 0.255 W/kg = -5.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 55.413$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 850, Body SAR, Top Edge, Mid.ch


Area Scan (9x21x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.612 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.013 W/kg

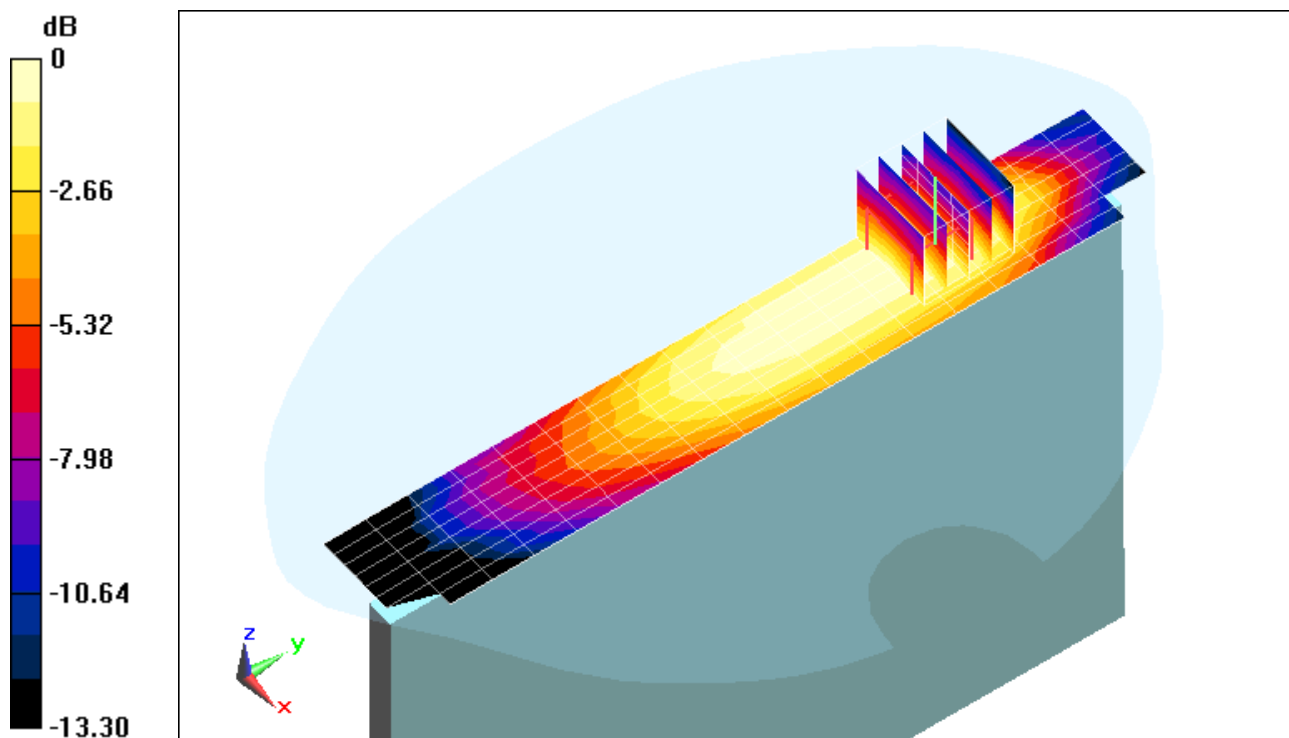

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 55.413$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 850, Body SAR, Right Edge, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.349 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.167 W/kg

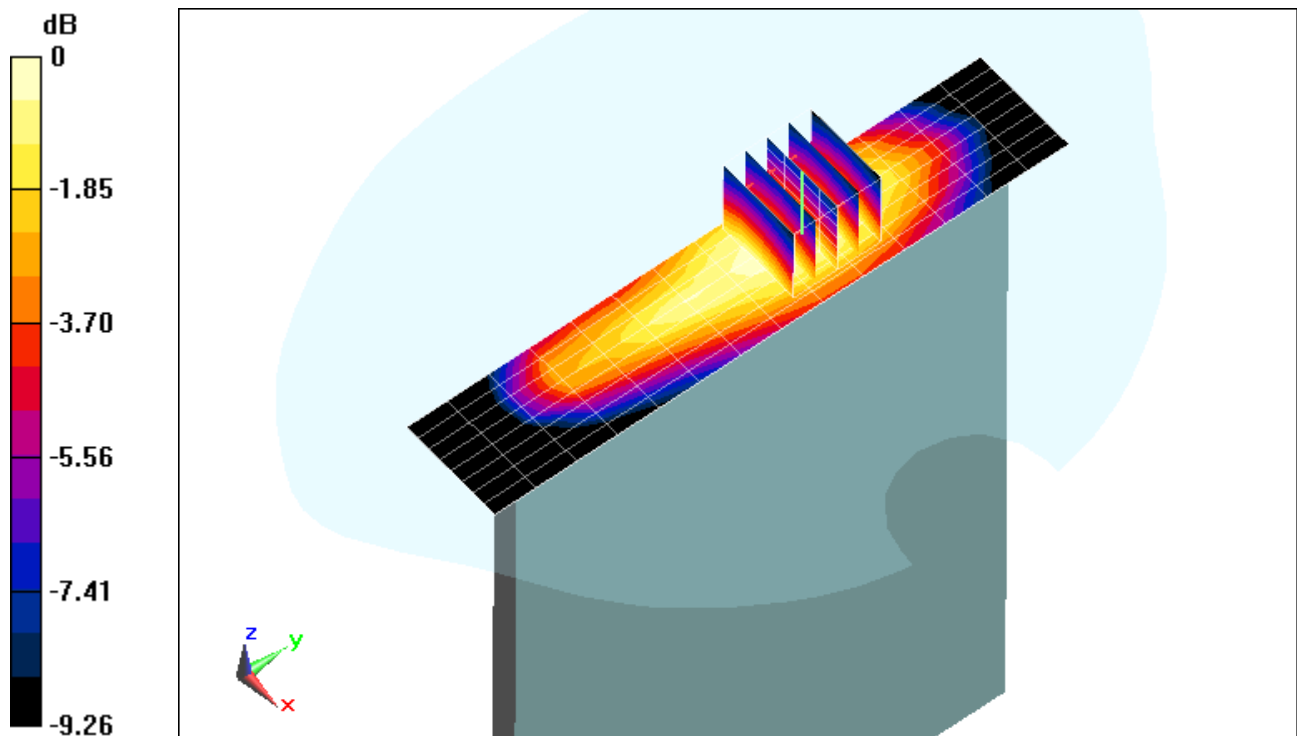

0 dB = 0.255 W/kg = -5.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Grip Activated #2

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 55.413$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 850, Body SAR, Back side, Mid.ch


Area Scan (7x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.351 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.199 W/kg

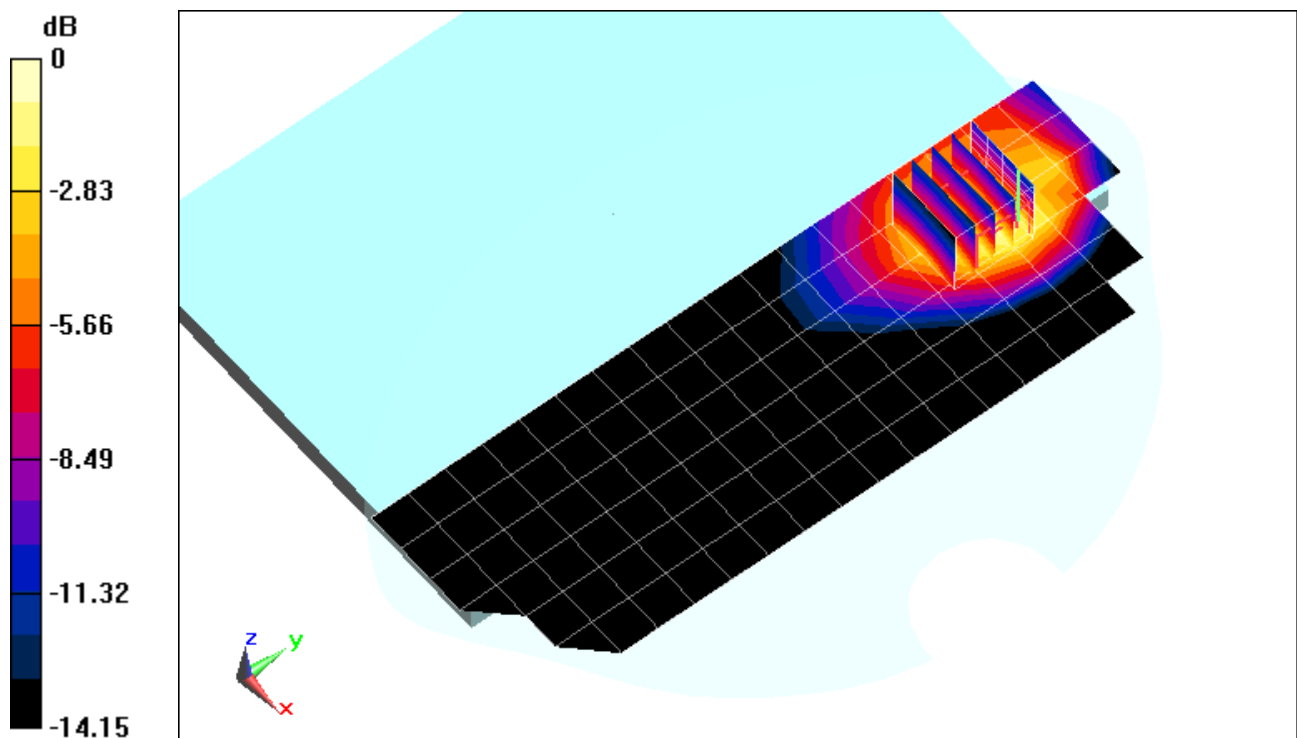

0 dB = 0.376 W/kg = -4.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Grip Activated #2

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 55.413$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 850, Body SAR, Top Edge, Mid.ch


Area Scan (9x21x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.683 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.035 W/kg

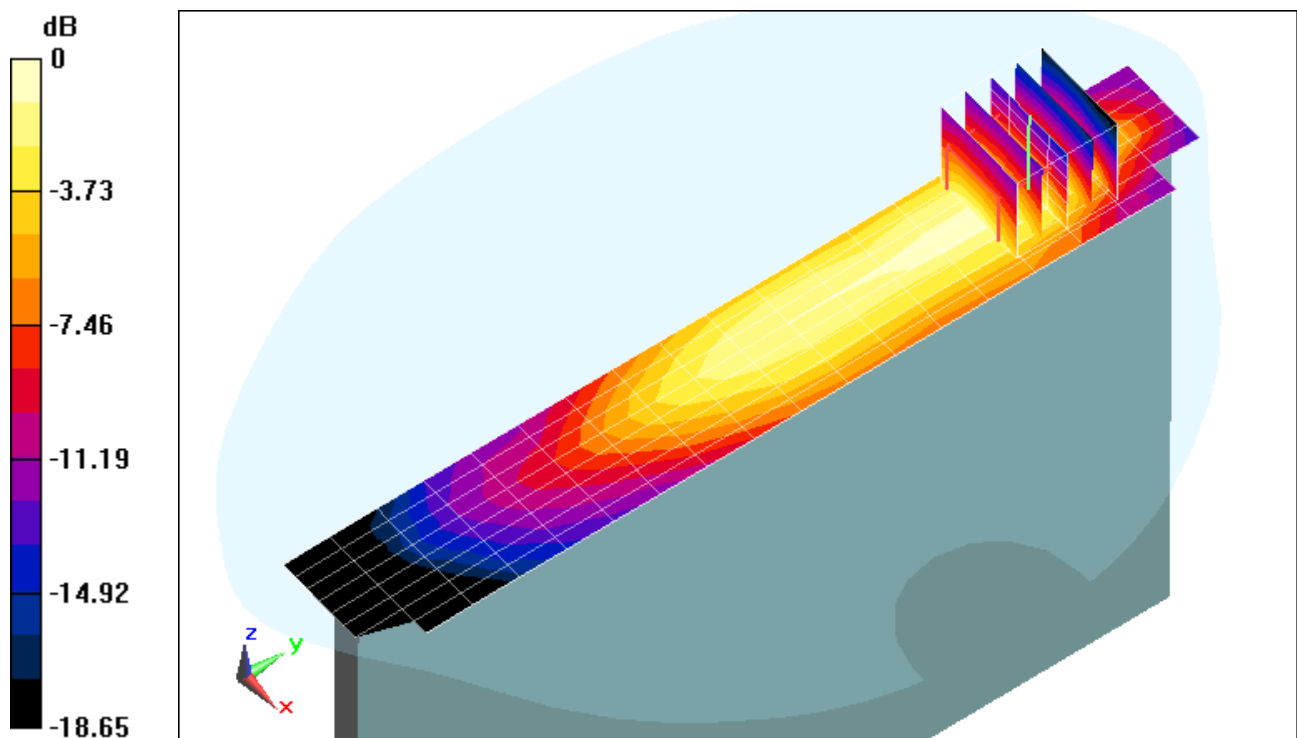

0 dB = 0.0762 W/kg = -11.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #2

Communication System: GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 52.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (9x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.711 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.565 W/kg

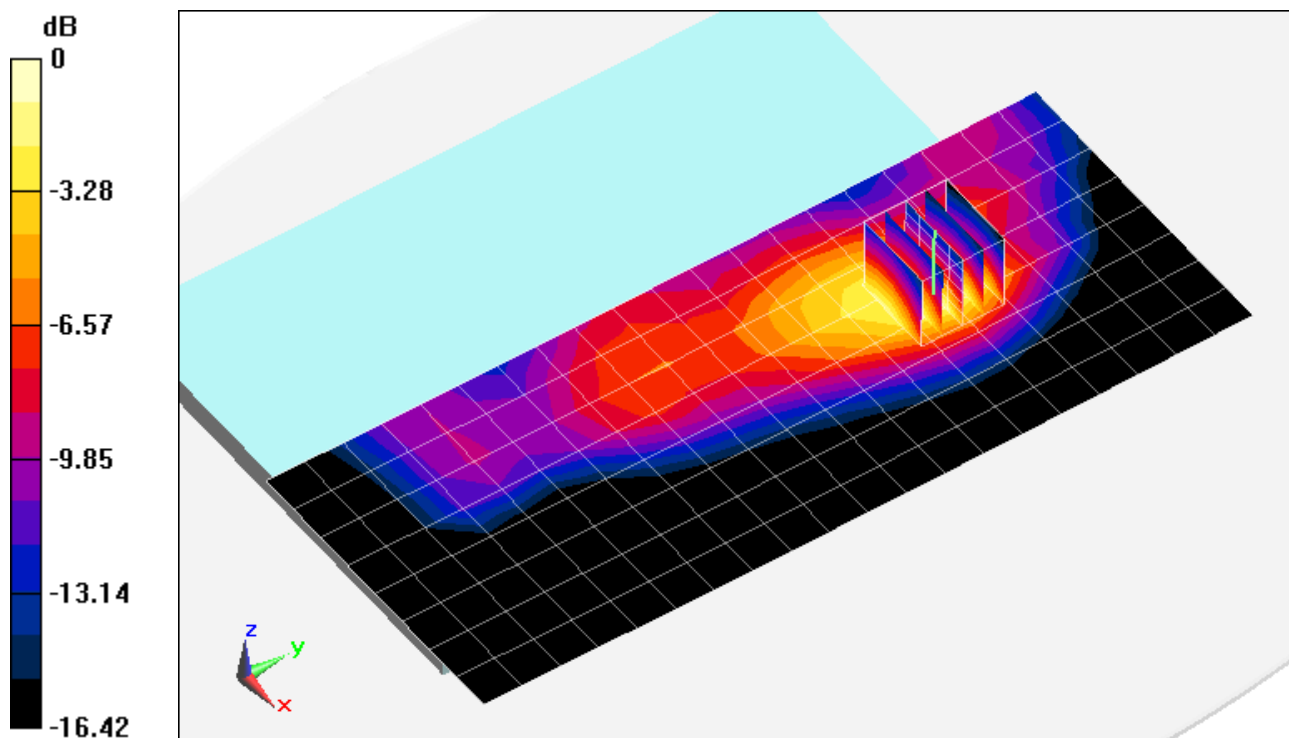

0 dB = 0.621 W/kg = -2.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #2

Communication System: GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 52.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

Mode: GPRS 1900, Body SAR, Top Edge, Mid.ch, 4 Tx Slots


Area Scan (13x21x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.550 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.381 W/kg

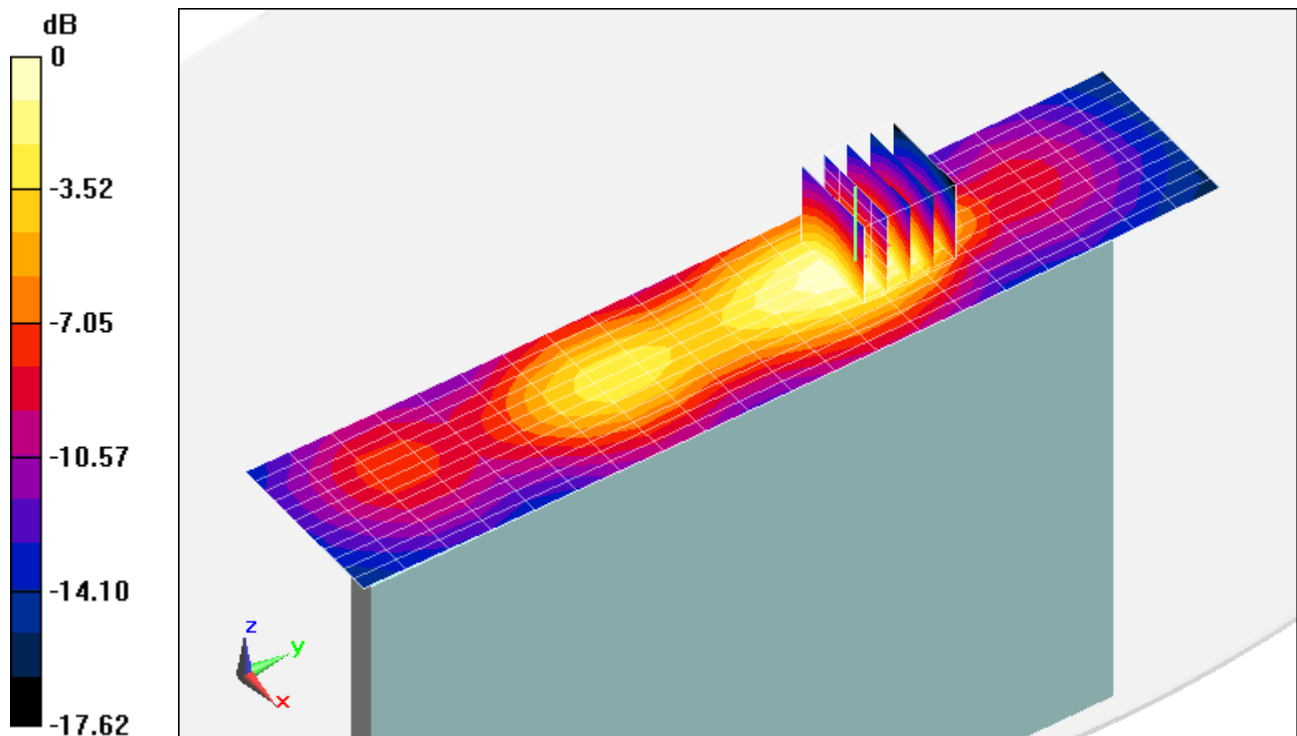

0 dB = 0.413 W/kg = -3.84 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #2

Communication System: GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 52.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

Mode: GPRS 1900, Body SAR, Right Edge, Mid.ch, 4 Tx Slots


Area Scan (7x14x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.253 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.267 W/kg

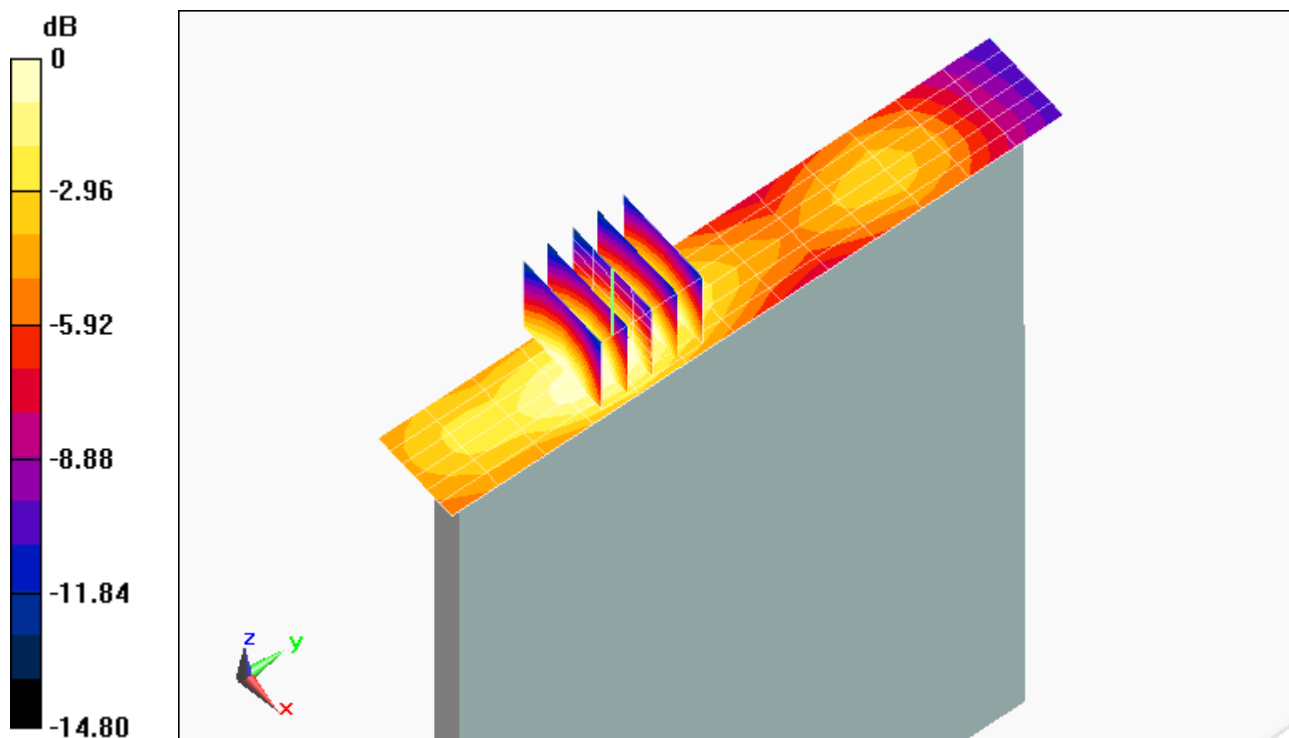

0 dB = 0.156 W/kg = -8.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Grip Activated #2

Communication System: GSM1900 GPRS 3 Tx Slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 53.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.169 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.337 W/kg

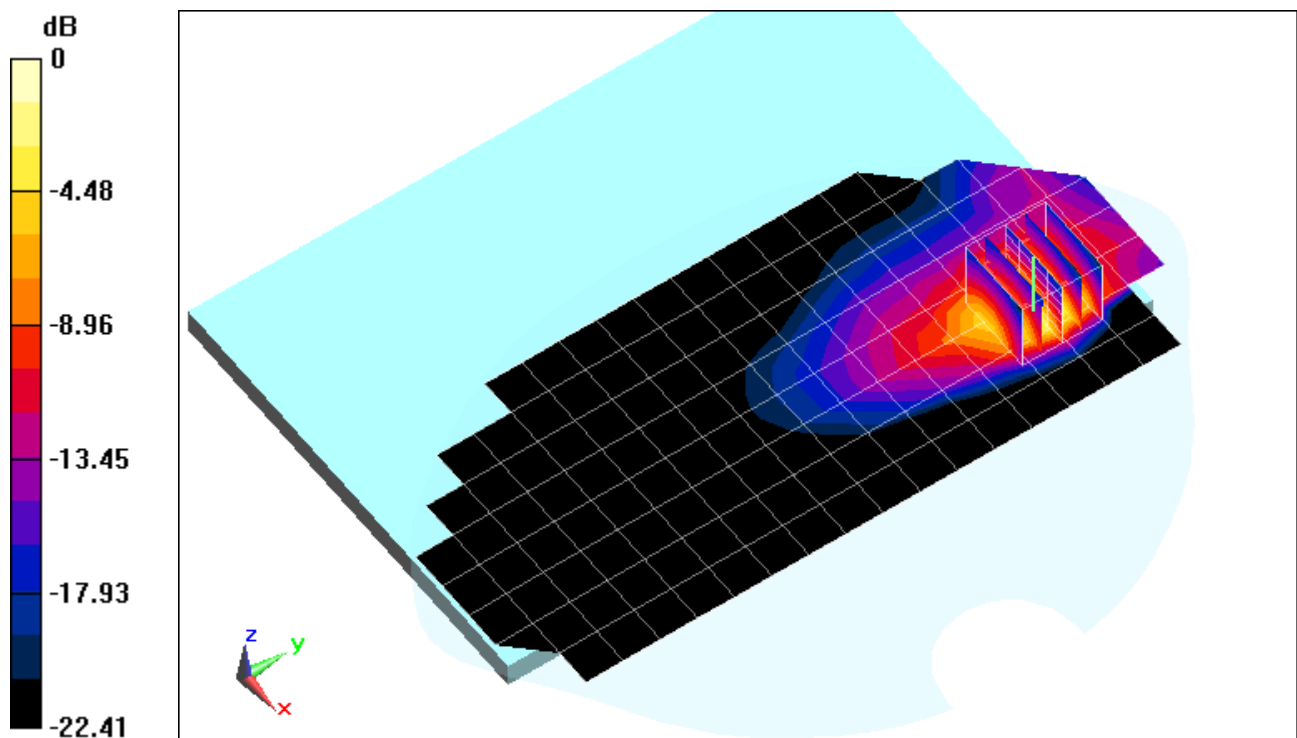

0 dB = 0.879 W/kg = -0.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Grip Activated #2

Communication System: GSM1900 GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 53.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: GPRS 1900, Body SAR, Top Edge, Mid.ch, 3 Tx Slots


Area Scan (9x21x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.763 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.126 W/kg

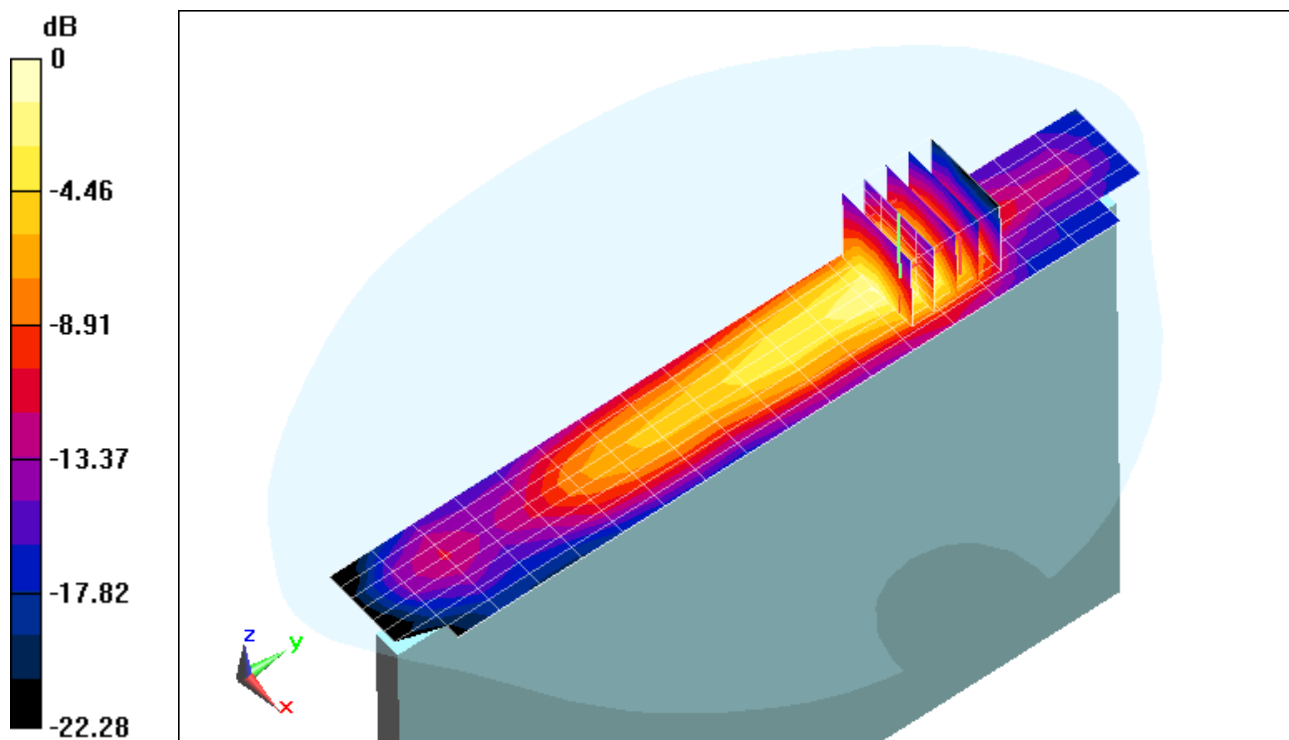

0 dB = 0.282 W/kg = -5.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 53.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.2 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 1900, Body SAR, Back side, Mid.ch


Area Scan (9x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.756 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.264 W/kg

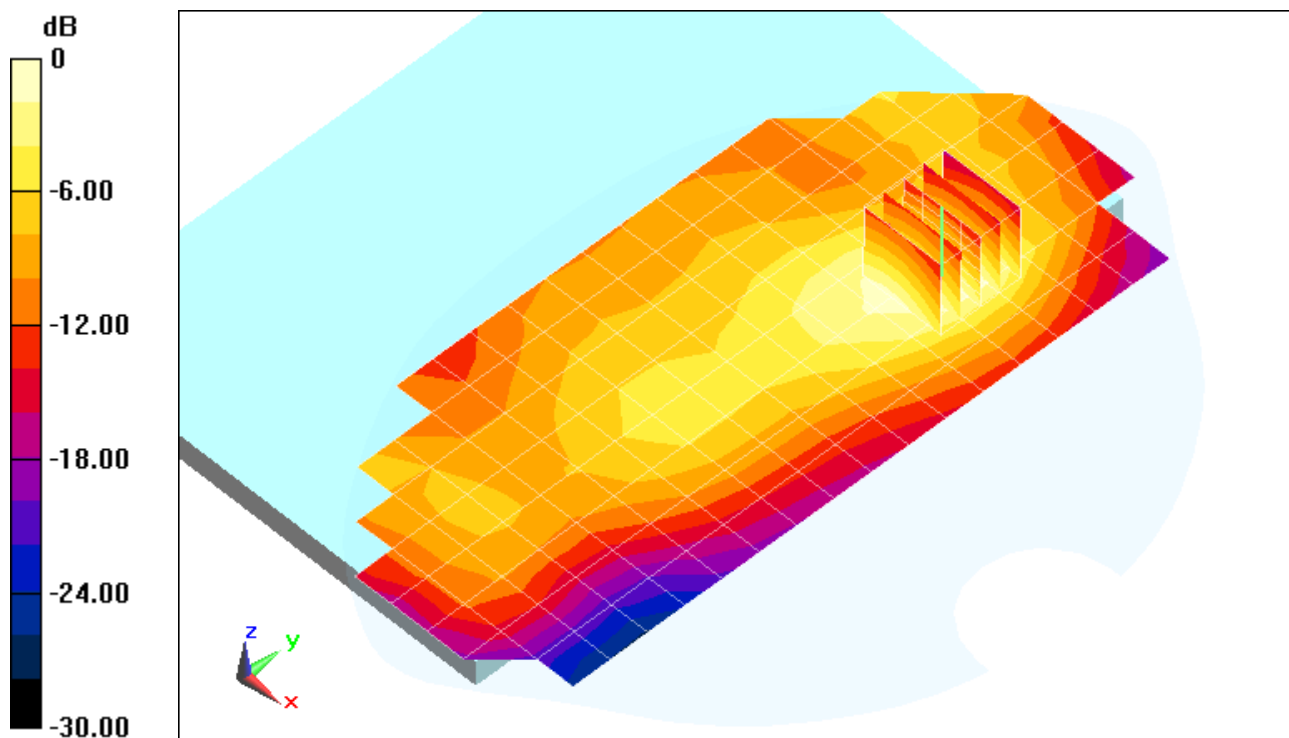

0 dB = 0.471 W/kg = -3.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 53.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 1900, Body SAR, Top Edge, Mid.ch


Area Scan (9x21x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.441 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.046 W/kg

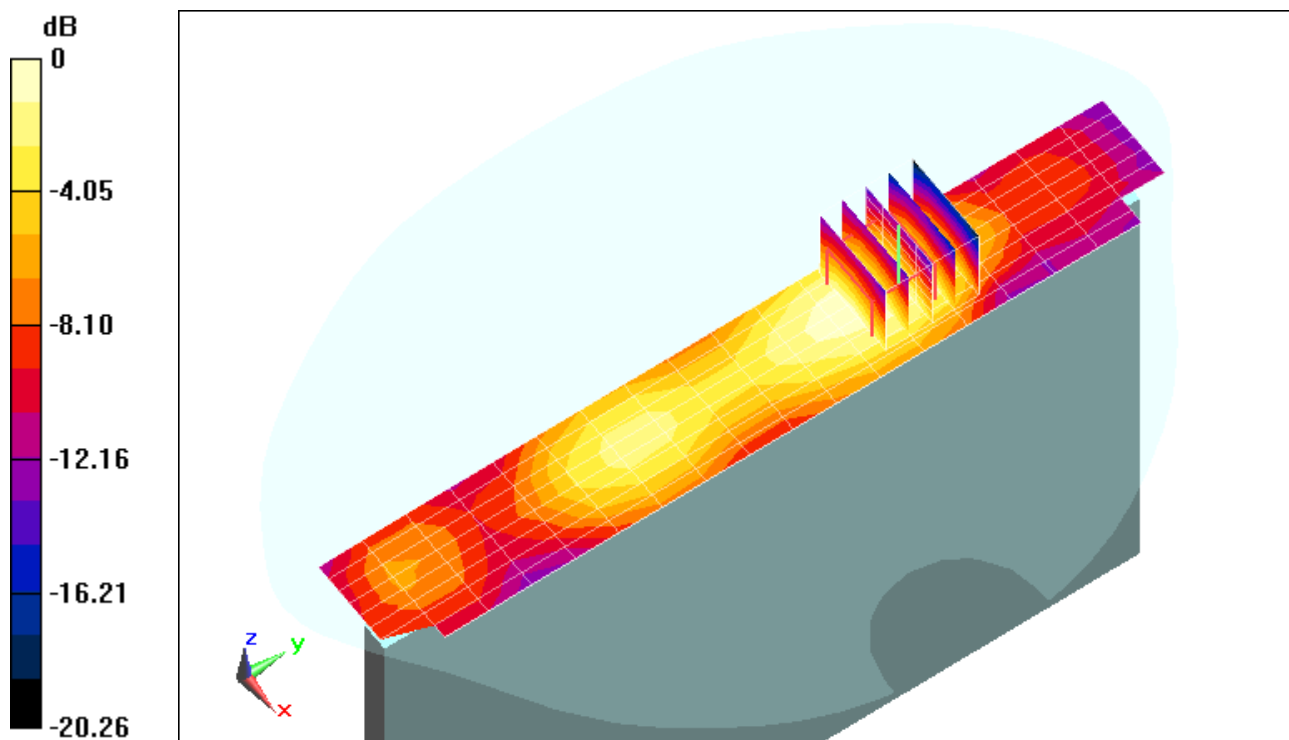

0 dB = 0.0830 W/kg = -10.81 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 53.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 1900, Body SAR, Right Edge, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.529 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.207 W/kg

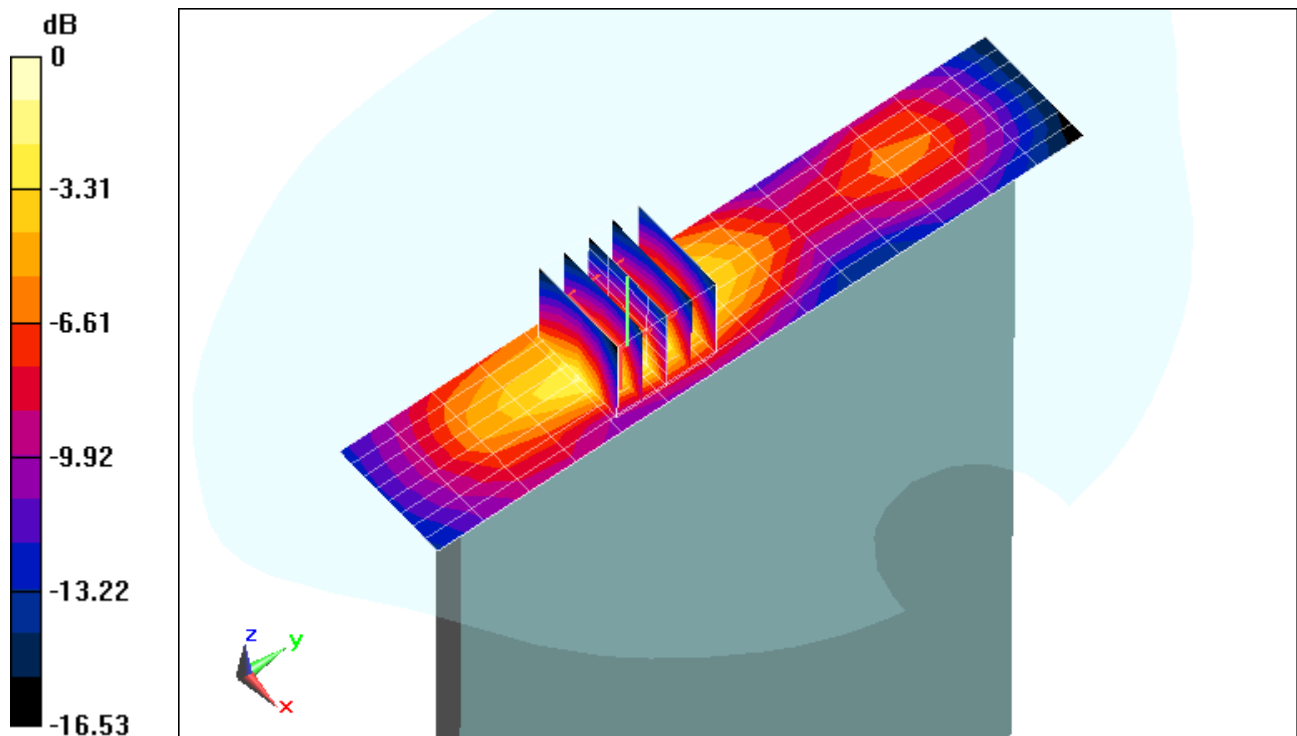

0 dB = 0.462 W/kg = -3.35 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Grip Activated #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 52.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 1900, Body SAR, Back side, Mid.ch


Area Scan (9x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.653 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.996 W/kg

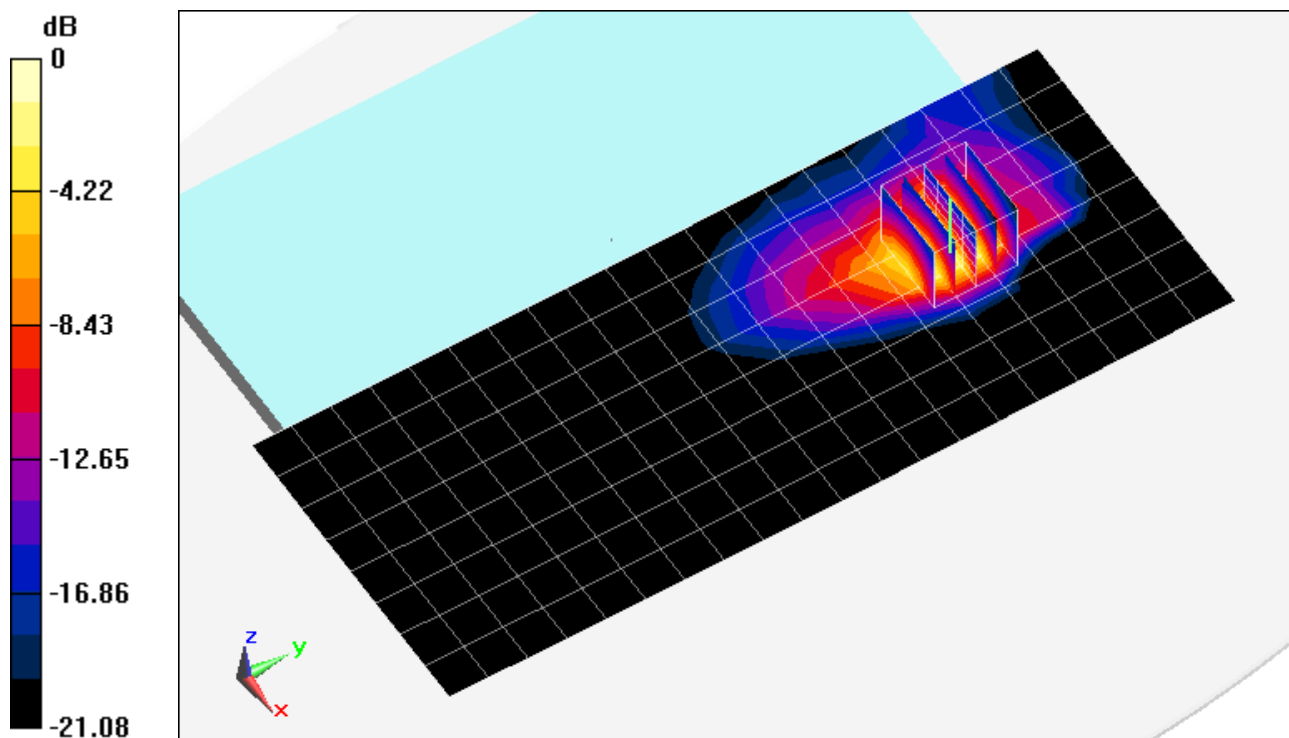

0 dB = 1.15 W/kg = 0.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Grip Activated #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ mho/m}$; $\epsilon_r = 52.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

Mode: WCDMA 1900, Body SAR, Top Edge, Mid.ch


Area Scan (7x20x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.333 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.387 W/kg

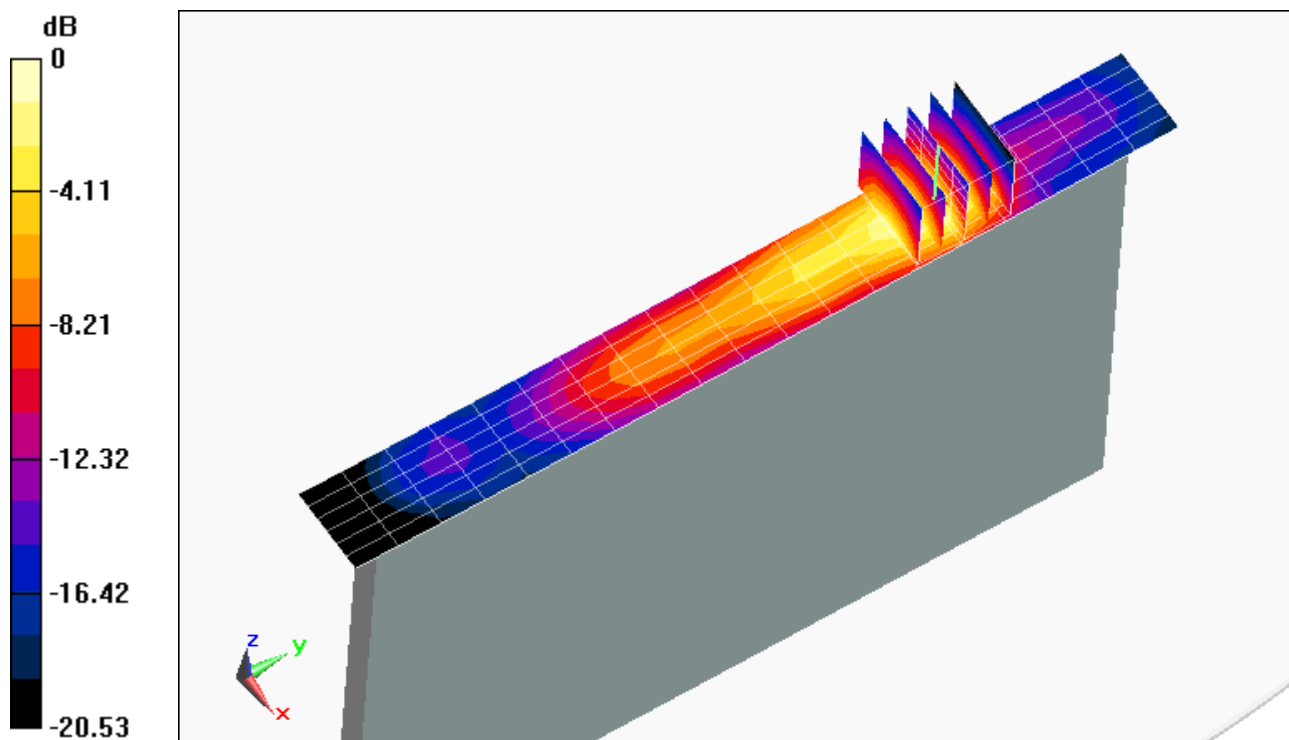

0 dB = 0.446 W/kg = -3.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #2

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.025 \text{ mho/m}$; $\epsilon_r = 50.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-22-2012; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(4.35, 4.35, 4.35); Calibrated: 9/20/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Back Side


Area Scan (8x26x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.223 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 1.1 W/kg

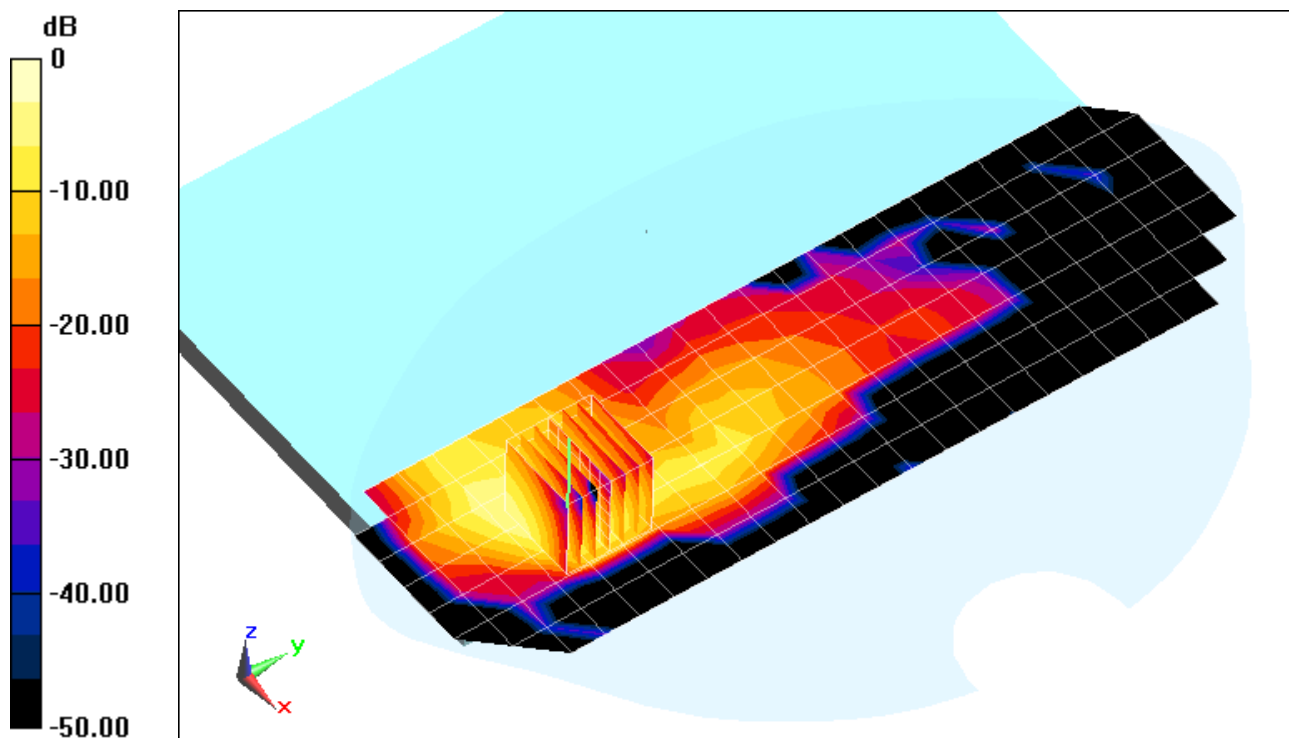

0 dB = 0.755 W/kg = -1.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #2

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.025 \text{ mho/m}$; $\epsilon_r = 50.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-22-2012; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(4.35, 4.35, 4.35); Calibrated: 9/20/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Top Edge


Area Scan (10x26x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.356 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.108 W/kg

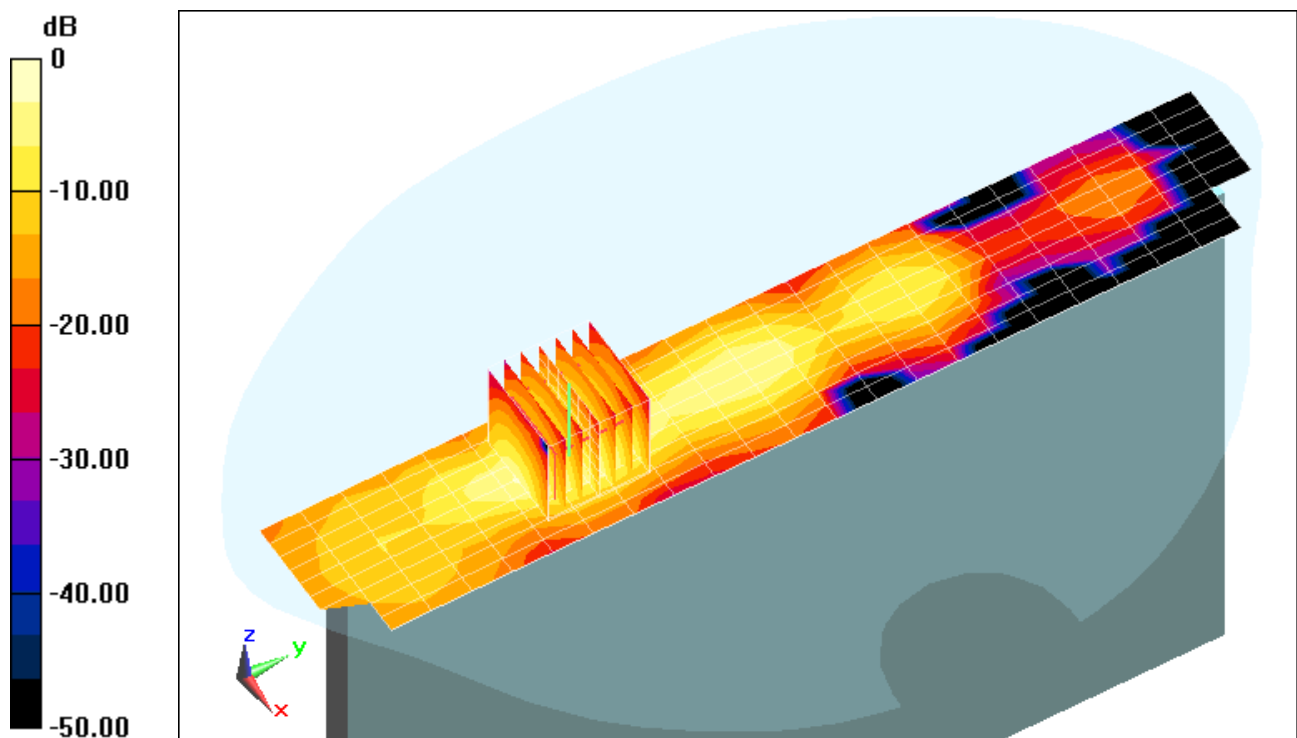

0 dB = 0.347 W/kg = -4.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #2

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.025 \text{ mho/m}$; $\epsilon_r = 50.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-22-2012; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(4.35, 4.35, 4.35); Calibrated: 9/20/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Left Edge


Area Scan (10x18x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.581 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.047 W/kg

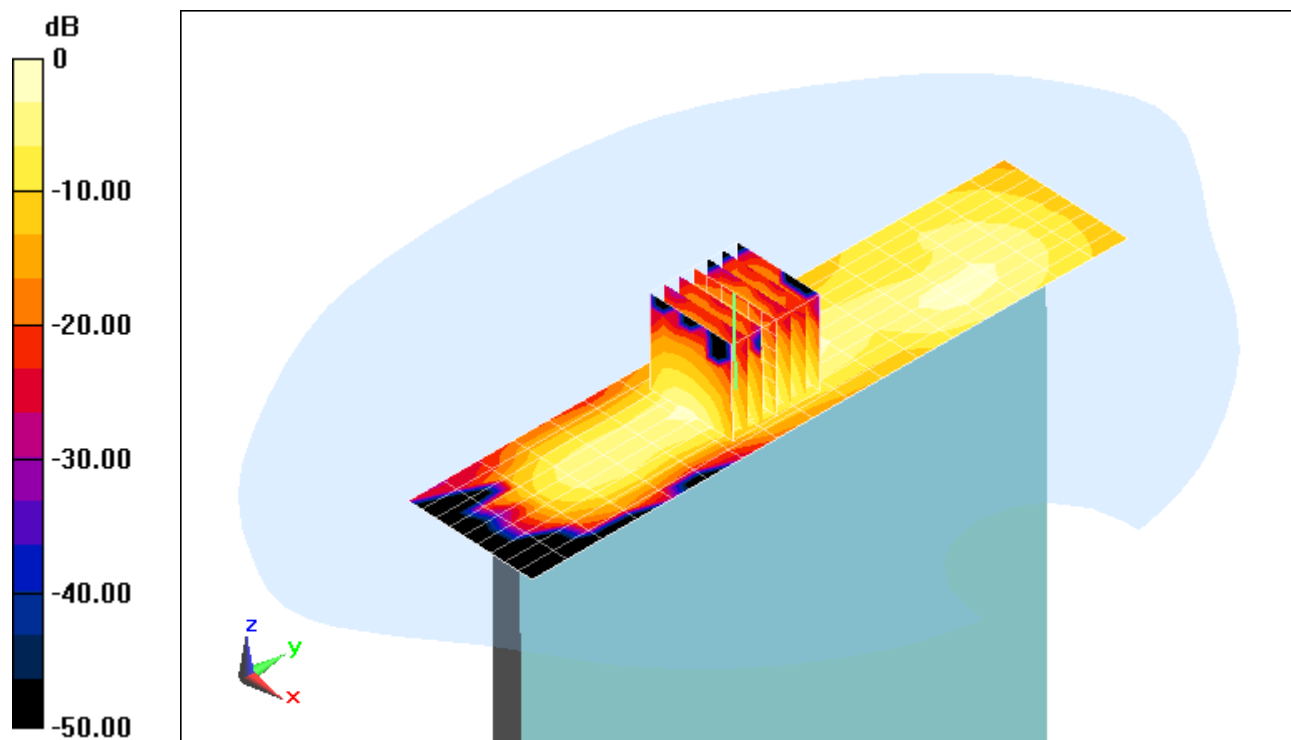

0 dB = 0.138 W/kg = -8.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5660 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5660 \text{ MHz}$; $\sigma = 5.941 \text{ mho/m}$; $\epsilon_r = 47.22$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-18-2012; Ambient Temp: 24.0°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3561; ConvF(3.17, 3.17, 3.17); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: IEEE 802.11a, 5.5 GHz, Body SAR, Ch 132, 6 Mbps, Back Side


Area Scan (11x29x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.363 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.141 W/kg

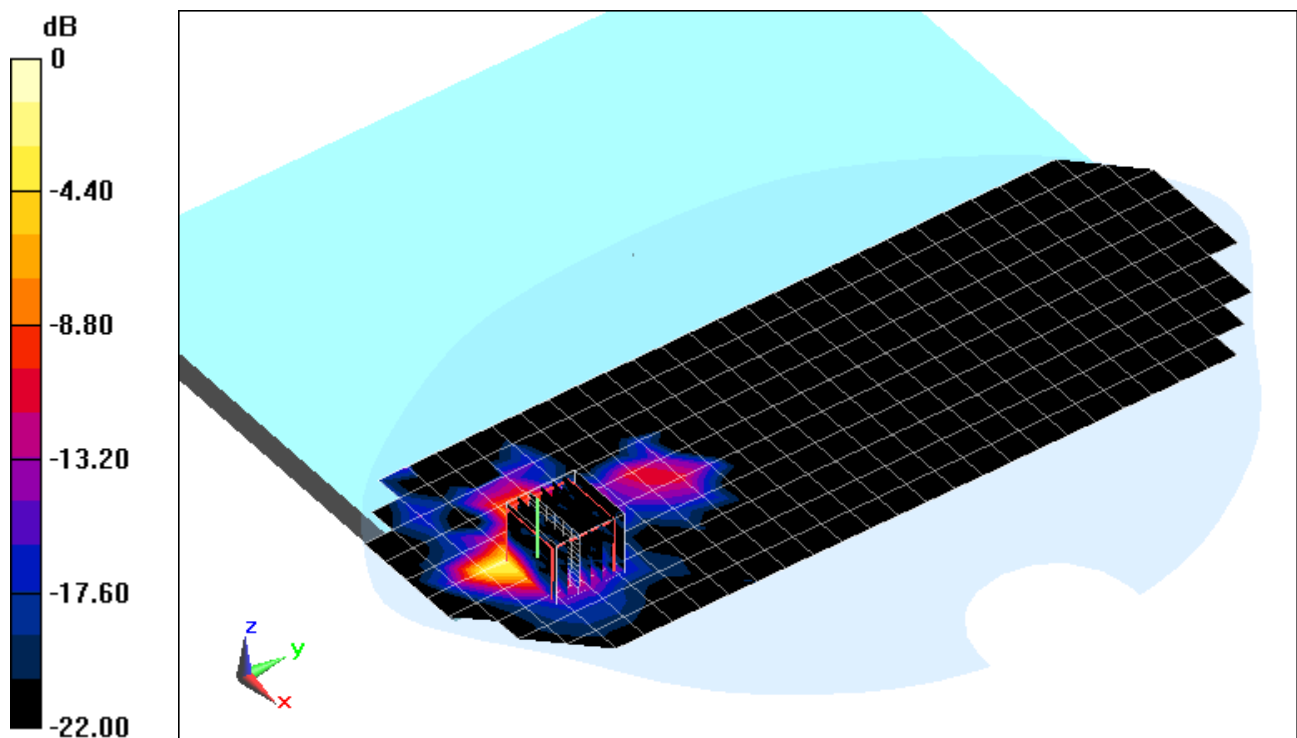

0 dB = 1.43 W/kg = 1.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5660 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5660 \text{ MHz}$; $\sigma = 5.941 \text{ mho/m}$; $\epsilon_r = 47.22$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-18-2012; Ambient Temp: 24.0°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3561; ConvF(3.17, 3.17, 3.17); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: IEEE 802.11a, 5.5 GHz, Body SAR, Ch 132, 6 Mbps, Top Edge


Area Scan (9x33x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.929 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.192 W/kg

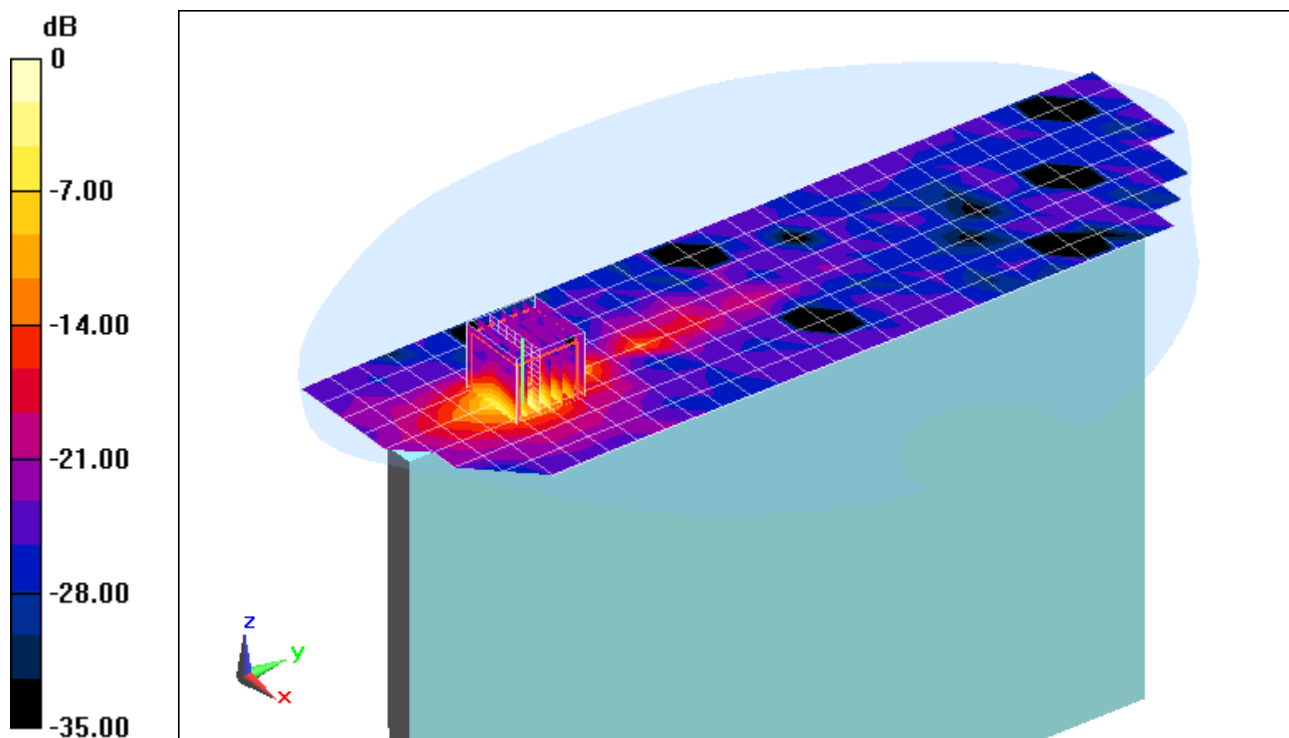

0 dB = 1.79 W/kg = 2.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSHVE230S; Type: Portable Tablet; Serial: FCC Max Power #1

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5280 \text{ MHz}$; $\sigma = 5.355 \text{ mho/m}$; $\epsilon_r = 48.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-18-2012; Ambient Temp: 23.8°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3561; ConvF(3.54, 3.54, 3.54); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

Mode: IEEE 802.11a, 5.3 GHz, Body SAR, Ch 56, 6 Mbps, Left Side


Area Scan (8x24x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.225 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00693 W/kg

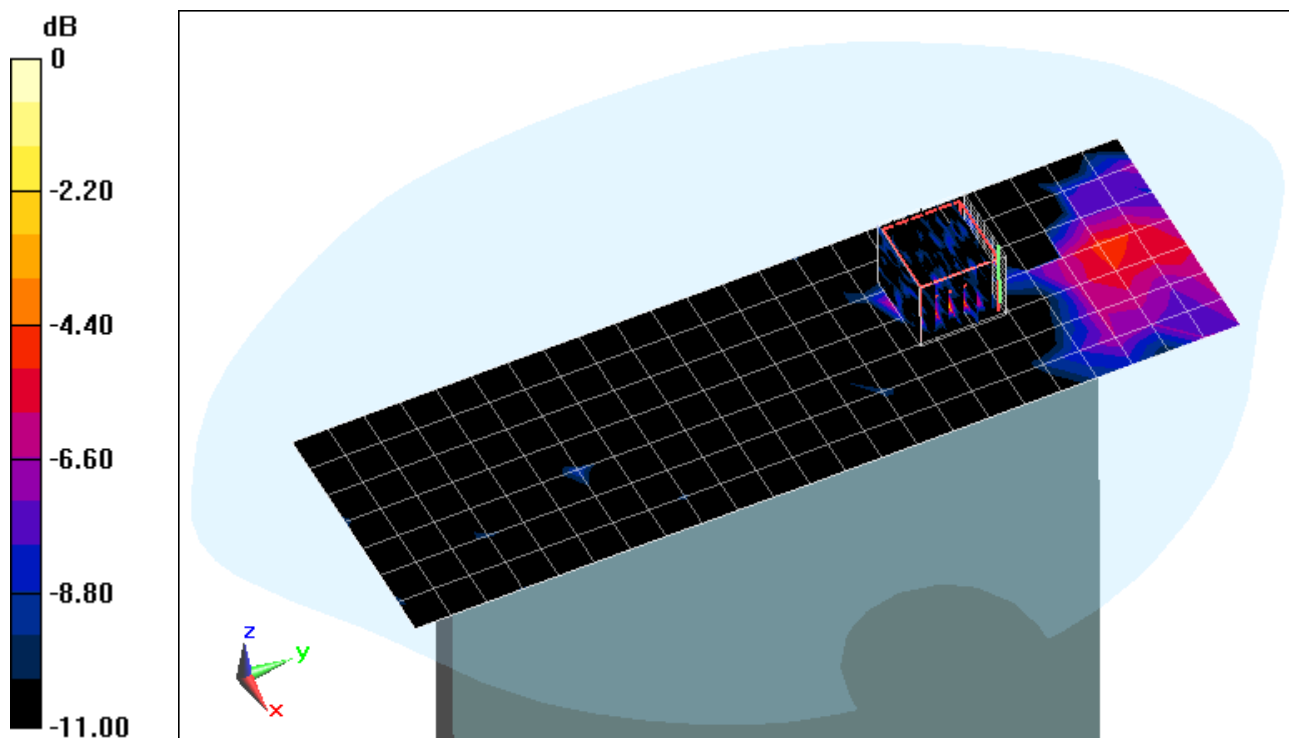

0 dB = 0.0874 W/kg = -10.58 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.984 \text{ mho/m}$; $\epsilon_r = 55.43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

835MHz System Verification

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.676 W/kg

Deviation: 6.25%

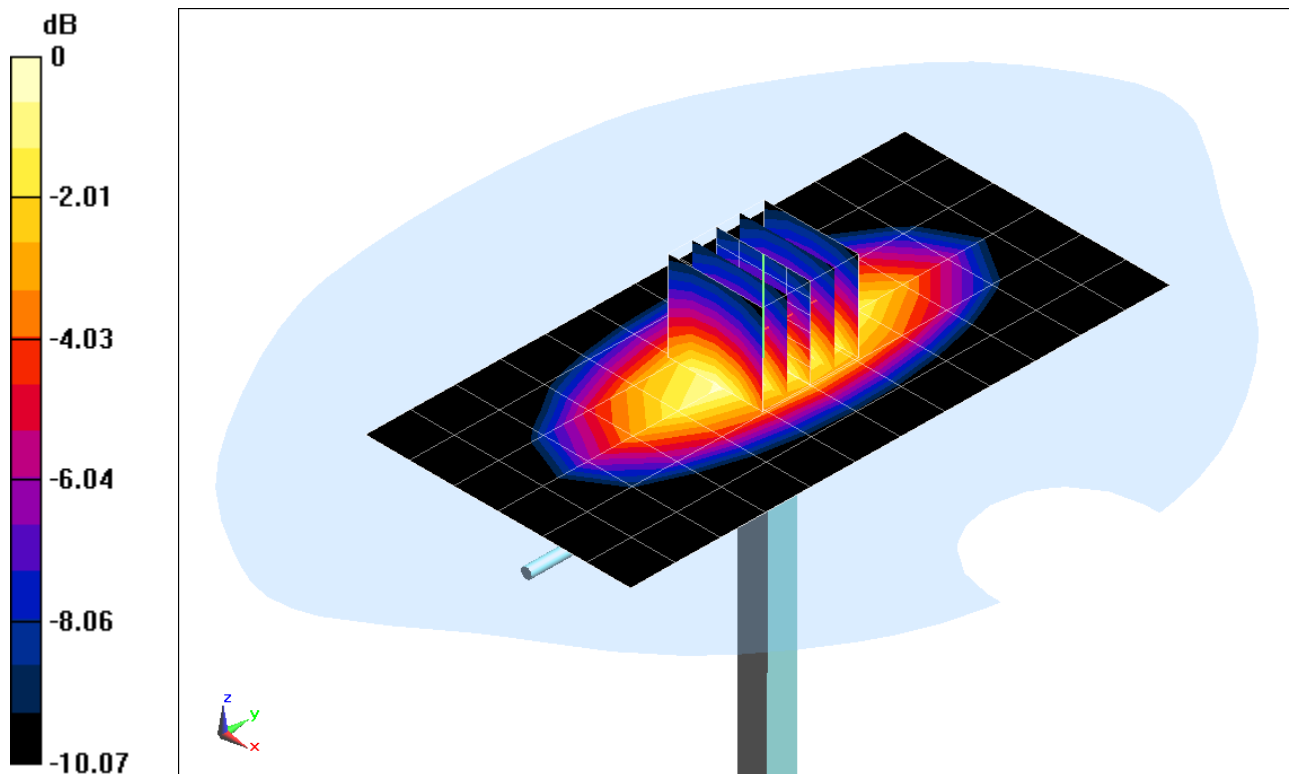

0 dB = 1.10 W/kg = 0.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.984 \text{ mho/m}$; $\epsilon_r = 55.43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-15-2012; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.13, 6.13, 6.13); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

835MHz System Verification

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.676 W/kg

Deviation: 6.25%

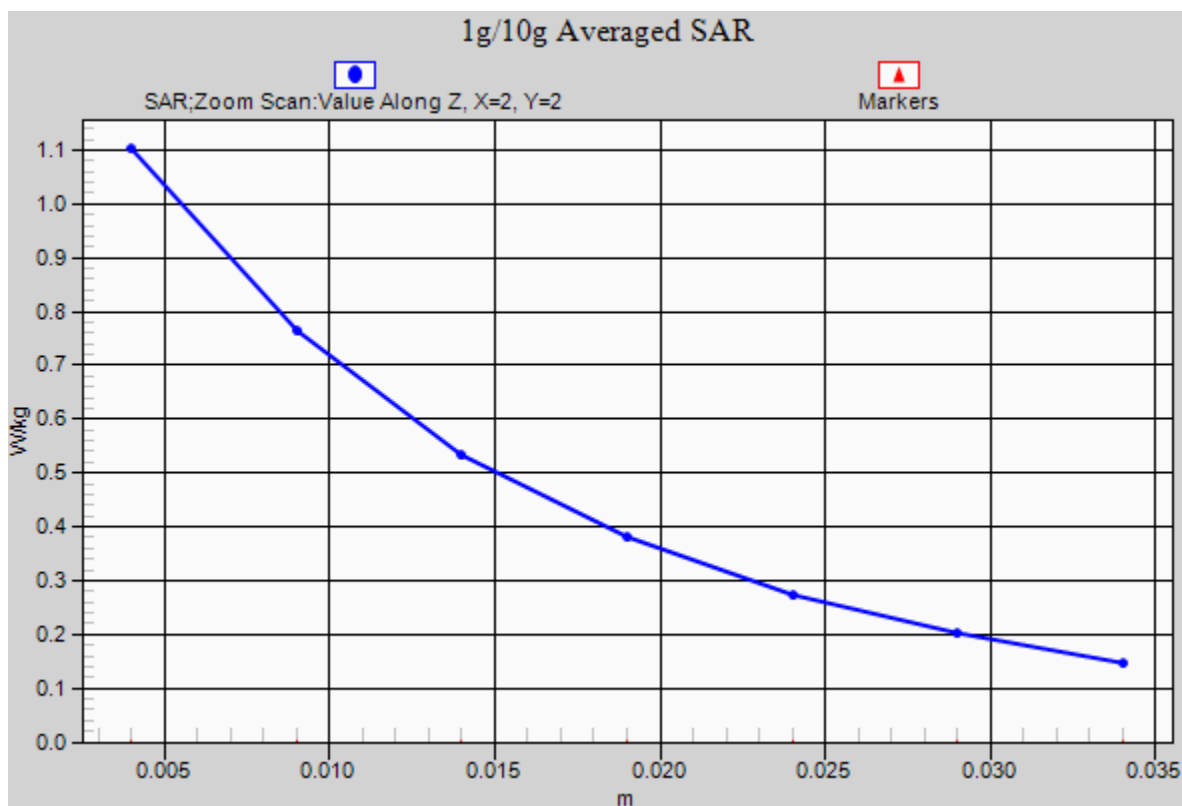

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 502

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.562 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

1900MHz System Verification

Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.15 dBm (103.5 mW)

Peak SAR (extrapolated) = 7.75 W/kg

SAR(1 g) = 4.24 W/kg; SAR(10 g) = 2.19 W/kg

Deviation: 5.31%

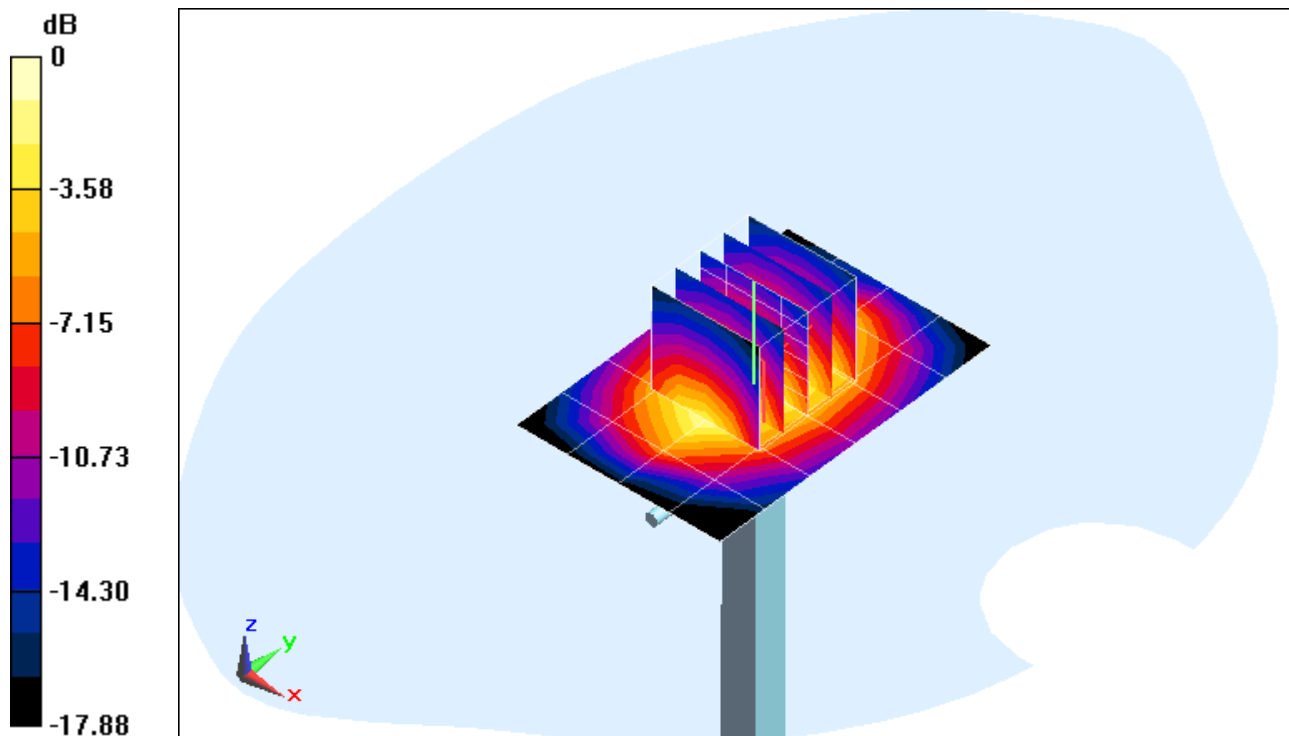

0 dB = 4.67 W/kg = 6.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 502

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.562 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-16-2012; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.63, 4.63, 4.63); Calibrated: 3/16/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/20/2012

Phantom: SAM with CRP; Type: SAM; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

1900MHz System Verification

Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.15 dBm (103.5 mW)

Peak SAR (extrapolated) = 7.75 W/kg

SAR(1 g) = 4.24 W/kg; SAR(10 g) = 2.19 W/kg

Deviation: 5.31%

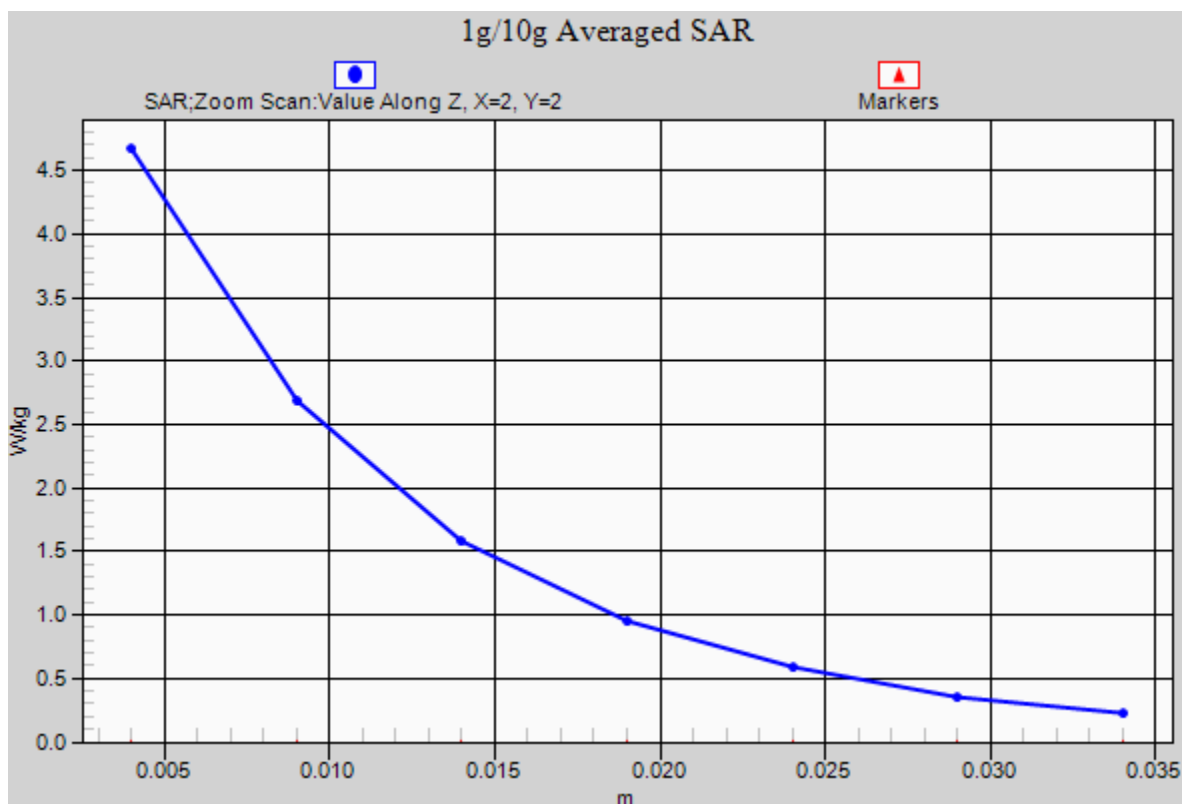

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.576 \text{ mho/m}$; $\epsilon_r = 52.357$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

1900 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 4.06 W/kg; SAR(10 g) = 2.12 W/kg

Deviation: 3.84%

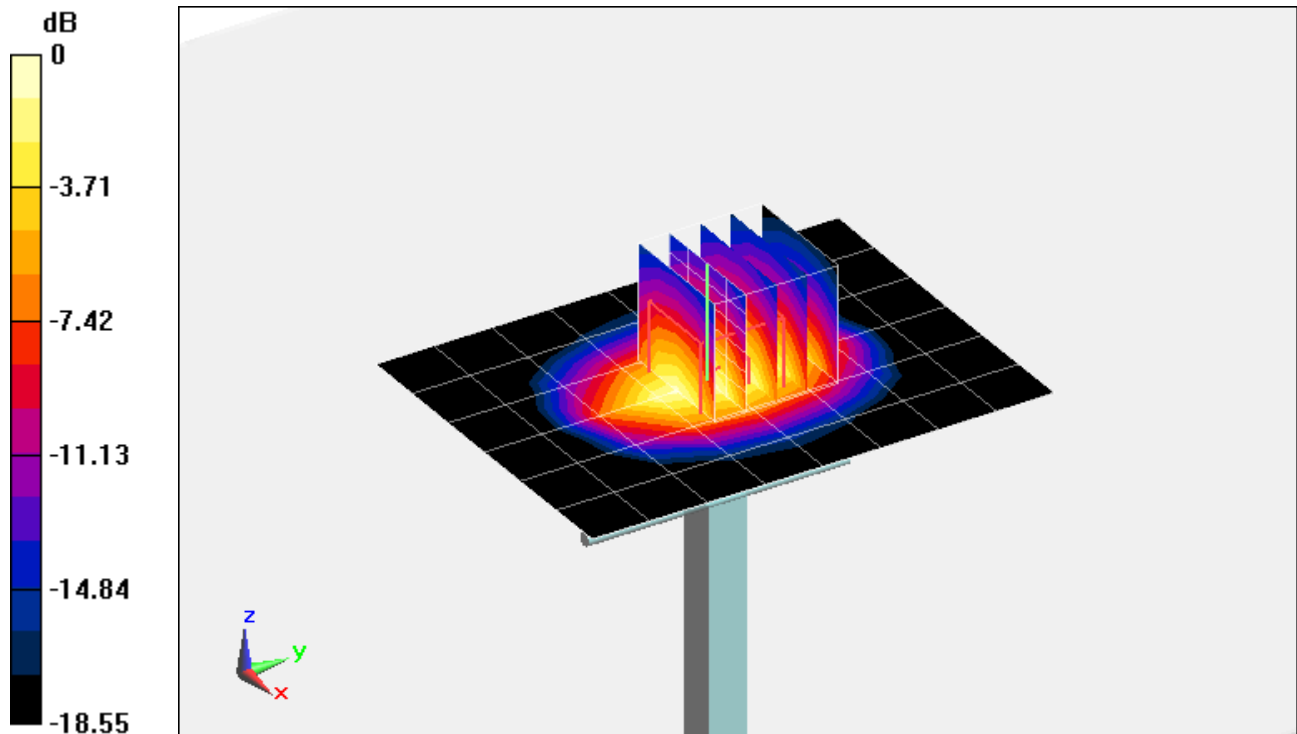

0 dB = 4.53 W/kg = 6.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.576 \text{ mho/m}$; $\epsilon_r = 52.357$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-23-2012; Ambient Temp: 23.7°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(4.5, 4.5, 4.5); Calibrated: 4/24/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/19/2012

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.7 (6848)

1900 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 4.06 W/kg; SAR(10 g) = 2.12 W/kg

Deviation: 3.84%

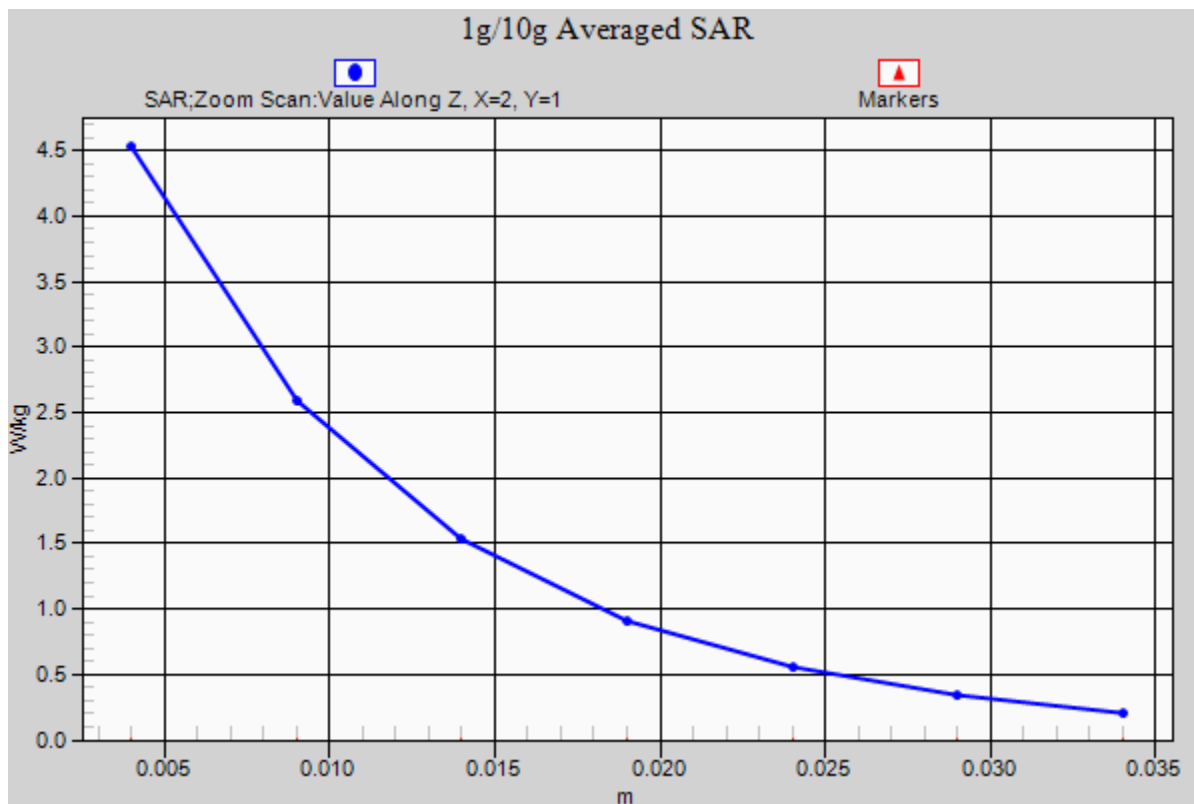

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 882

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.043 \text{ mho/m}$; $\epsilon_r = 50.44$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-22-2012; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(4.35, 4.35, 4.35); Calibrated: 9/20/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.4 W/kg

Deviation: 3.78%

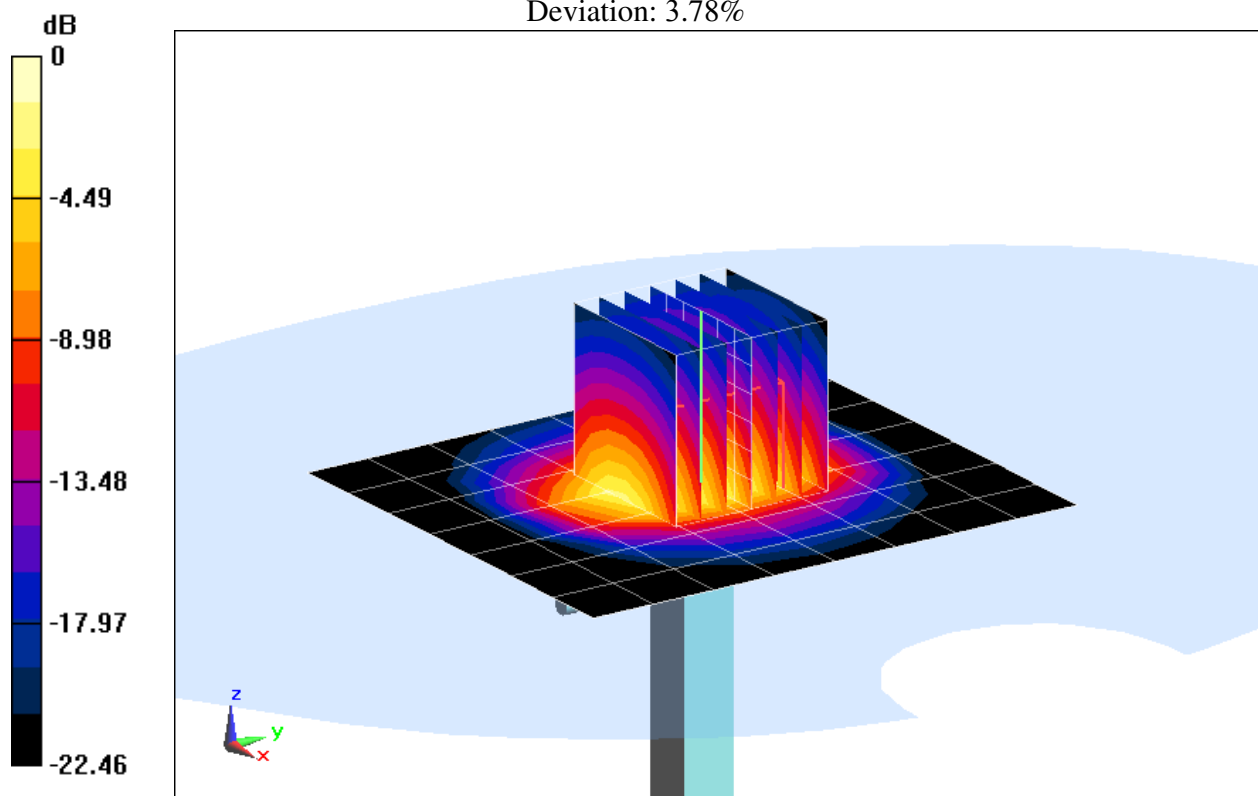

0 dB = 6.74 W/kg = 8.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 882

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.043 \text{ mho/m}$; $\epsilon_r = 50.44$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-22-2012; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(4.35, 4.35, 4.35); Calibrated: 9/20/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.4 W/kg

Deviation: 3.78%

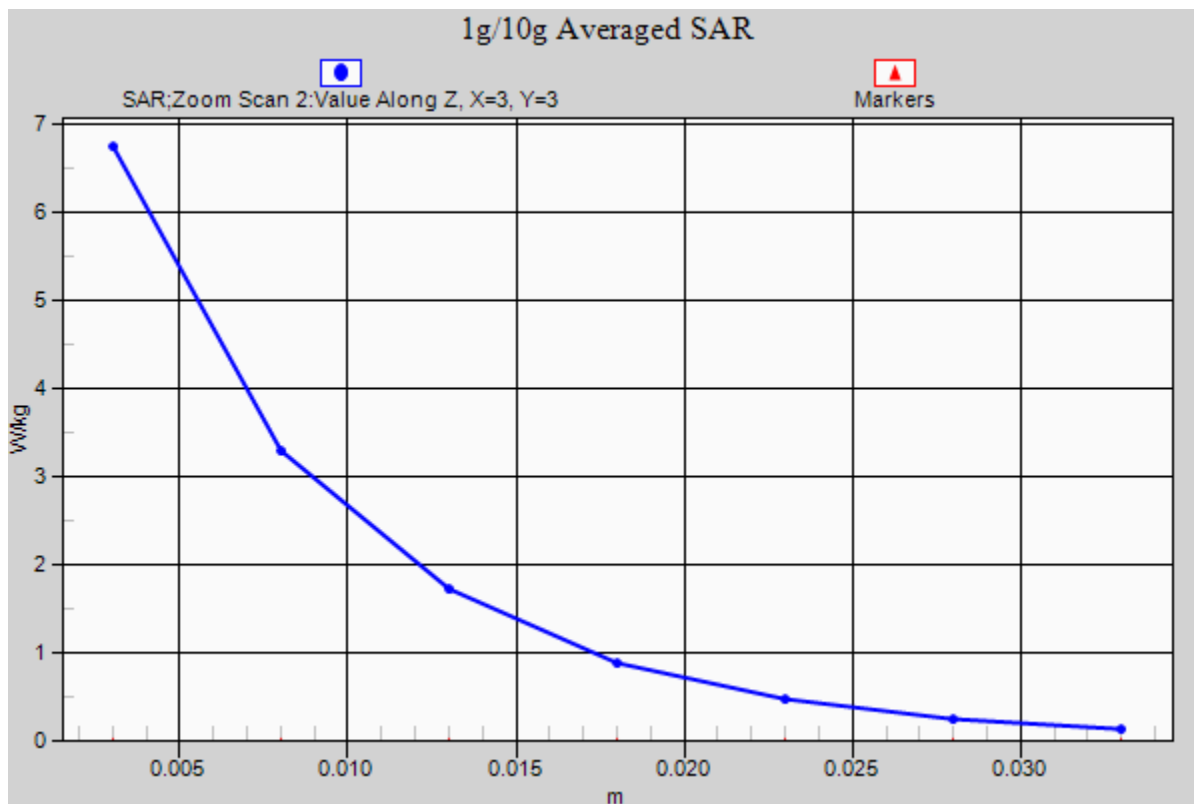

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.224 \text{ mho/m}$; $\epsilon_r = 48.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2012; Ambient Temp: 23.8°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3561; ConvF(3.76, 3.76, 3.76); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

5200MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 29.741 mW/g

SAR(1 g) = 7.65 mW/g; SAR(10 g) = 2.14 mW/g

Deviation: 4.22%

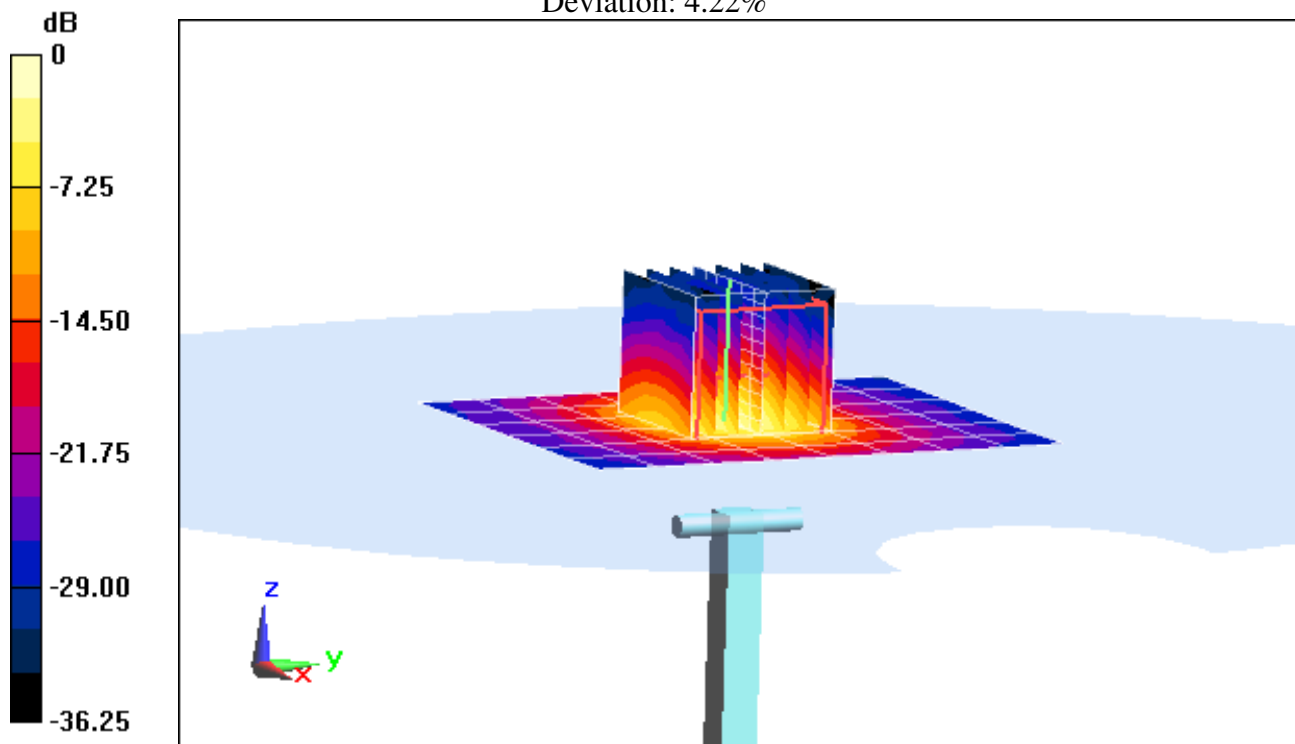

0 dB = 15.9 mW/g = 24.03 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5200 Muscle Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.224 \text{ mho/m}$; $\epsilon_r = 48.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2012; Ambient Temp: 23.8°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3561; ConvF(3.76, 3.76, 3.76); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

5200MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 29.741 W/kg

SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.14 W/kg

Deviation: 4.22%

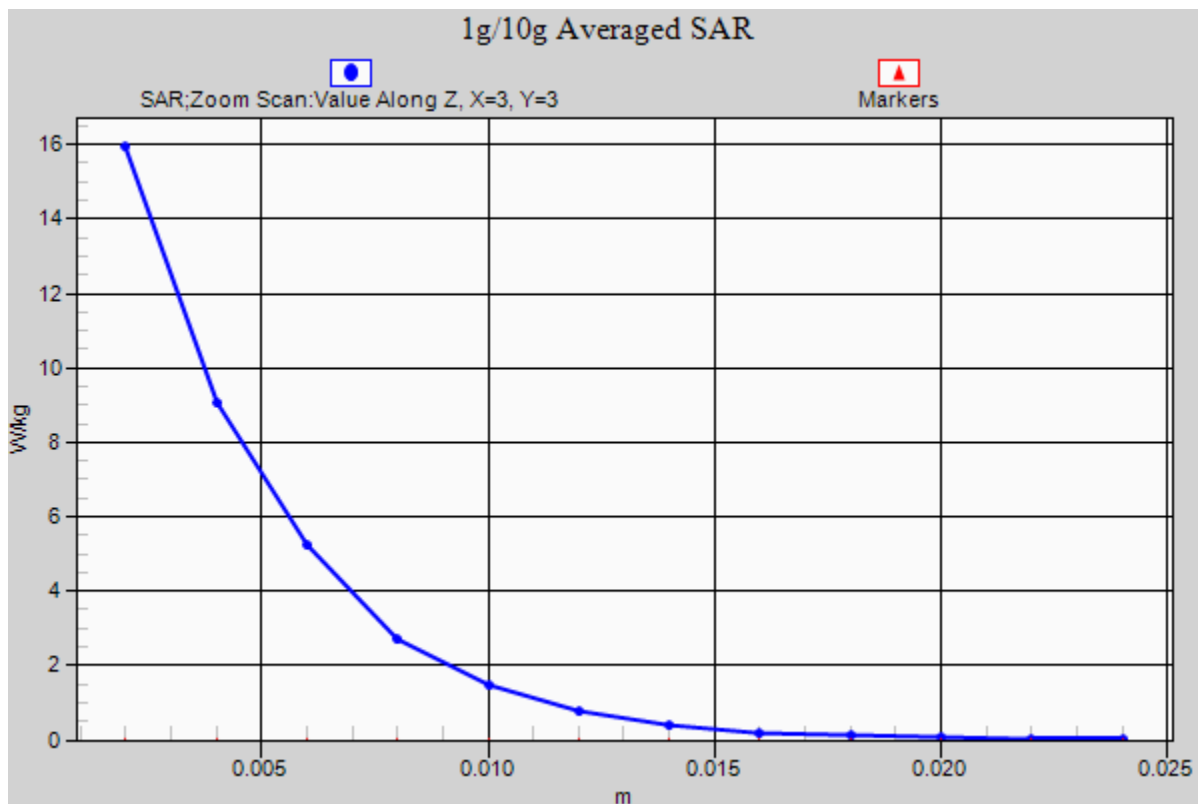

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.671 \text{ mho/m}$; $\epsilon_r = 47.71$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2012; Ambient Temp: 23.9°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3561; ConvF(3.33, 3.33, 3.33); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

5500MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 31.719 mW/g

SAR(1 g) = 7.8 mW/g; SAR(10 g) = 2.12 mW/g

Deviation: -1.14%

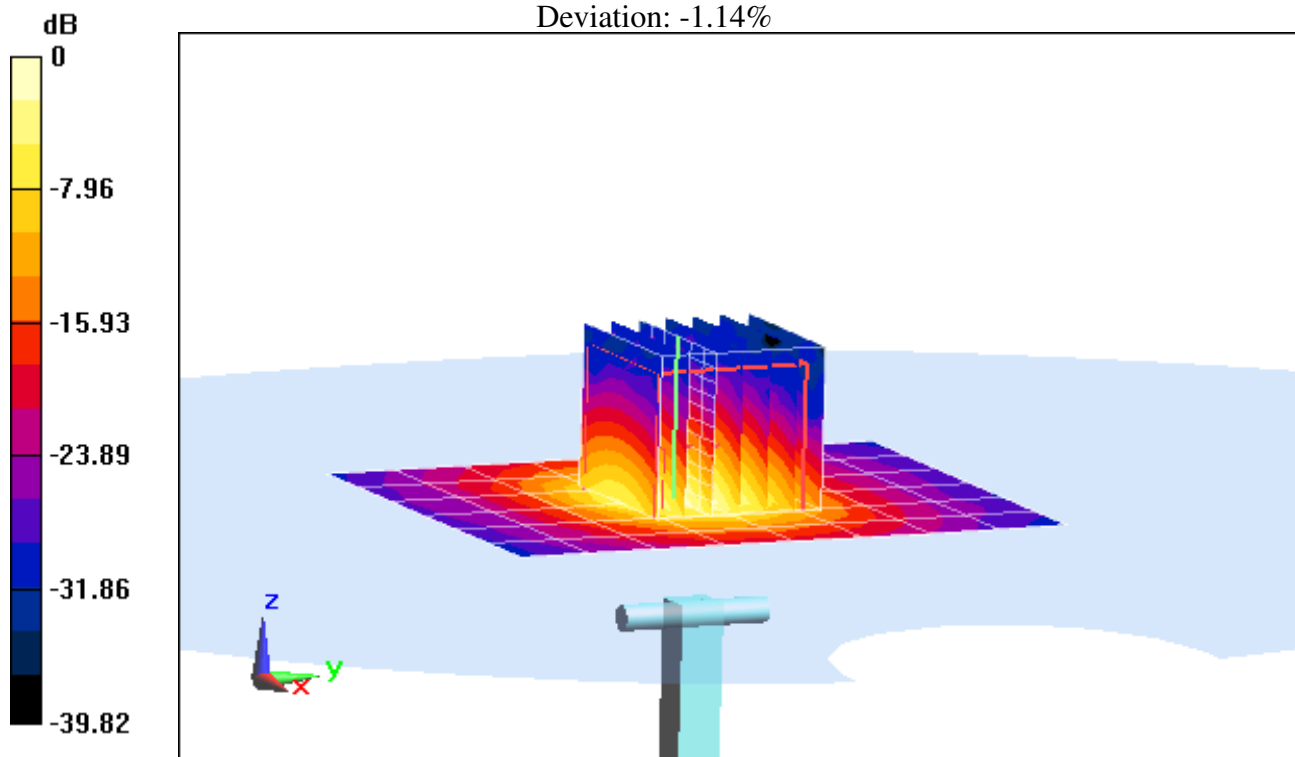

0 dB = 16.4 mW/g = 24.30 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200 Muscle Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.671 \text{ mho/m}$; $\epsilon_r = 47.71$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2012; Ambient Temp: 23.9°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3561; ConvF(3.33, 3.33, 3.33); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

5500MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 31.719 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.12 W/kg

Deviation: -1.14%

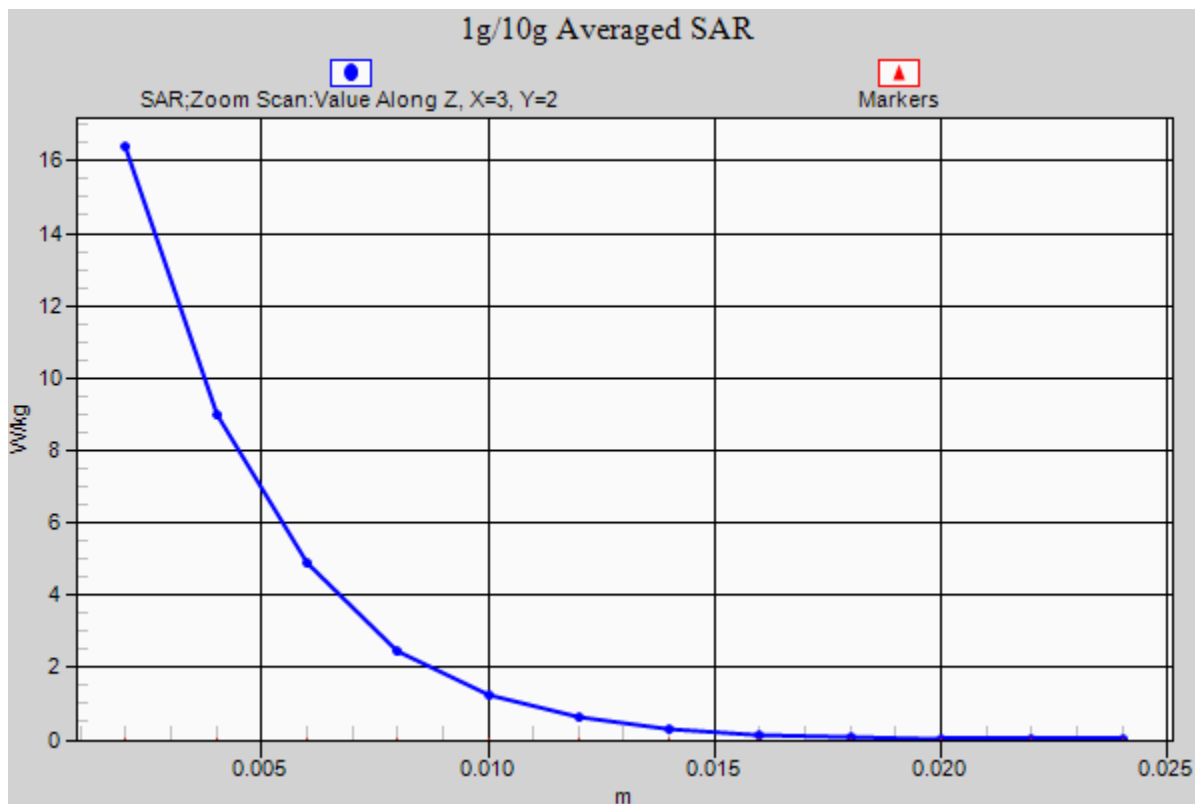

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.175 \text{ mho/m}$; $\epsilon_r = 46.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2012; Ambient Temp: 24.0°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3561; ConvF(3.42, 3.42, 3.42); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

5800MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 30.733 mW/g

SAR(1 g) = 7.07 mW/g; SAR(10 g) = 1.93 mW/g

Deviation: -4.85%

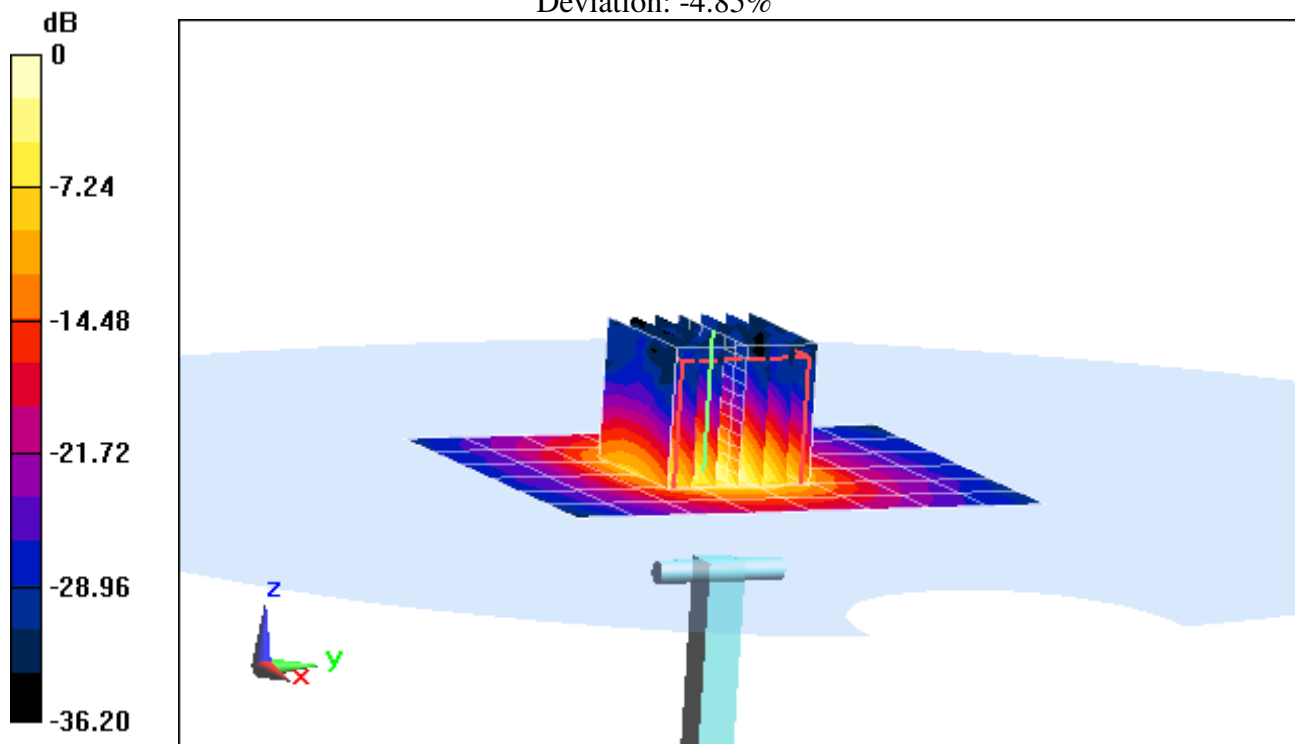

0 dB = 15.4 mW/g = 23.75 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5200 Muscle Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.175 \text{ mho/m}$; $\epsilon_r = 46.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2012; Ambient Temp: 24.0°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3561; ConvF(3.42, 3.42, 3.42); Calibrated: 7/26/2012;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.7 (6848)

5800MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 30.733 W/kg

SAR(1 g) = 7.07 W/kg; SAR(10 g) = 1.93 W/kg

Deviation: -4.85%

