

FCC RF Test Report

APPLICANT : SAMSUNG Electronics Co., LTD.
EQUIPMENT : Mobile Phone
BRAND NAME : Samsung
MODEL NAME : SHV-E270L
MARKETING NAME : BAFFIN
FCC ID : A3LSHVE270L
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Oct. 09, 2012 and completely tested on Nov. 06, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : A3LSHVE270L

Page Number : 1 of 77

Report Issued Date : Nov. 12, 2012

Report Version : Rev. 02

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Output Power	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 RF Utility	9
3 TEST RESULT	10
3.1 Number of Channel Measurement	10
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement	24
3.4 20dB Bandwidth Measurement	28
3.5 Peak Output Power Measurement	38
3.6 Conducted Band Edges Measurement	48
3.7 Conducted Spurious Emission Measurement	53
3.8 Radiated Band Edges and Spurious Emission Measurement	60
3.9 AC Conducted Emission Measurement	70
3.10 Antenna Requirements	75
4 LIST OF MEASURING EQUIPMENT	76
5 UNCERTAINTY OF EVALUATION	77

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O0922D	Rev. 01	Initial issue of report	Nov. 08, 2012
FR2O0922D	Rev. 02	Update report by adding descriptions of following test result : 1. Number of Channel Measurement page 11. 2. Dwell Time Measurement page 25. 3. AFH mode compliance statement of carrier frequency separation in section 3.2.5, page 14.	Nov. 12, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 1\text{ w}$ for 1Mbps $\leq 125\text{ Mw}$ for 2, 3Mbps	Pass	-
3.6	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 11.75 dB at 30.000 MHz
3.9	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.10 dB at 0.406 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

SAMSUNG Electronics Co., LTD.

IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

1.2 Manufacturer

SAMSUNG Electronics Co., LTD.

IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Samsung
Model Name	SHV-E270L
Marketing Name	BAFFIN
FCC ID	A3LSHVE270L
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11abgn / Bluetooth
HW Version	REV0.1
SW Version	E270L.001
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 9.93 dBm (0.0098 W) Bluetooth EDR (2Mbps) : 9.04 dBm (0.0080 W) Bluetooth EDR (3Mbps) : 9.43 dBm (0.0088 W)
Antenna Type	PIFA Antenna type with gain -5.58 dBi
Type of Modulation	Bluetooth v4.0(LE, with EDR)

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003 and ANSI C63.10-2009
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 3

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	9.42 dBm	8.59 dBm	9.03 dBm
Ch39	2441MHz	9.91 dBm	9.04 dBm	9.43 dBm
Ch78	2480MHz	9.93 dBm	8.93 dBm	9.34 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases (Y plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Pretest	Pretest
AC Conducted Emission	Mode 1 :GSM1900 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark: For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

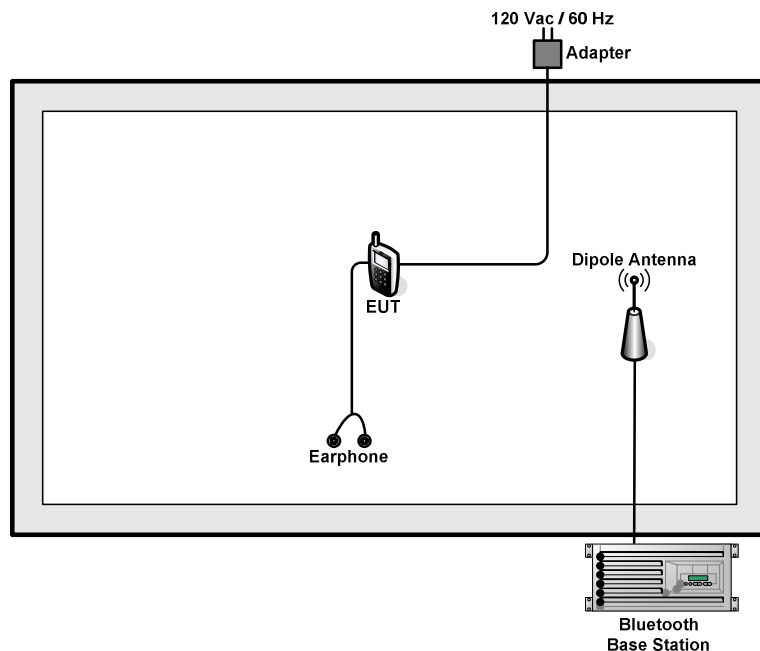

<AC Conducted Emission Mode>

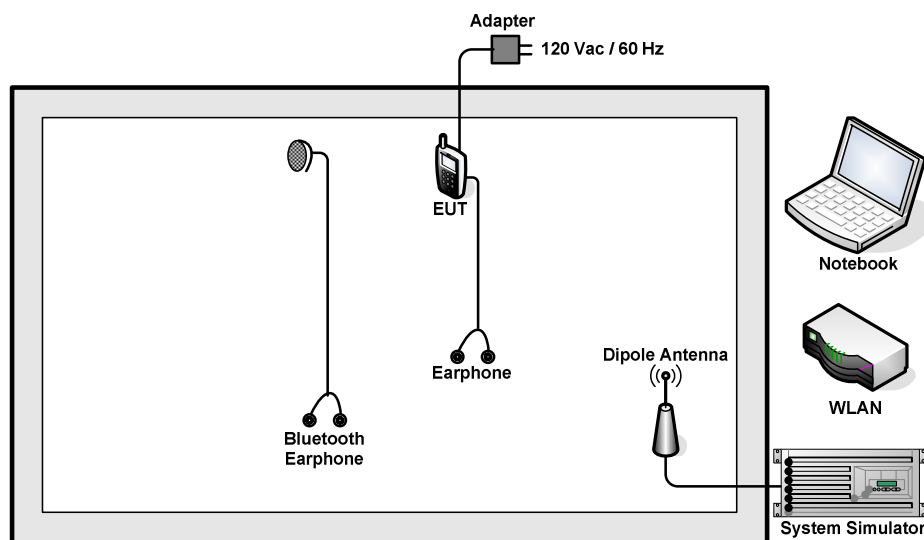

2.4 RF Utility

For Bluetooth function, key in “* #232331 #” on the EUT directly. Then, the EUT will contact with Bluetooth base station for continuous transmitting and receiving signals.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

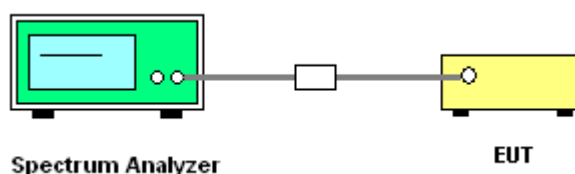


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%


Number of Hopping Channels (Channel)	Adaptive Frequency Hopping Limits (Channel)	Limits (Channel)	Pass/Fail
79	> 20	> 15	Pass

Remark: During AFH mode, the minimum number of hopping channels is 20. The requirement of minimum of 15 channels is met.

Number of Hopping Channel Plot on Channel 00 - 78

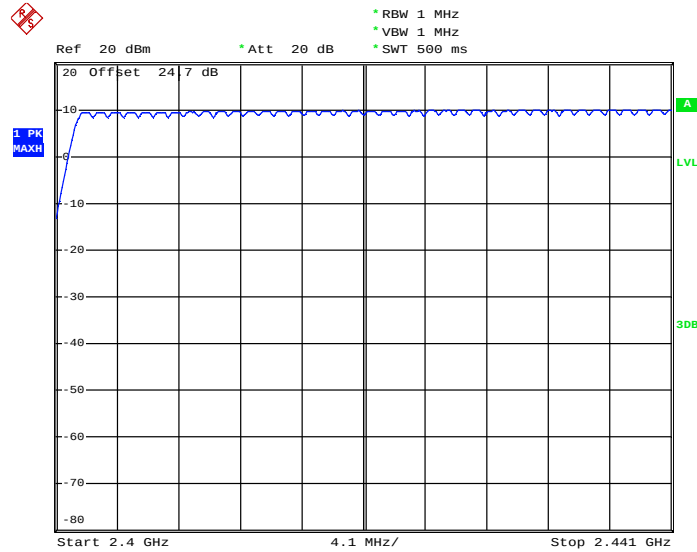

Date: 6.NOV.2012 16:31:38

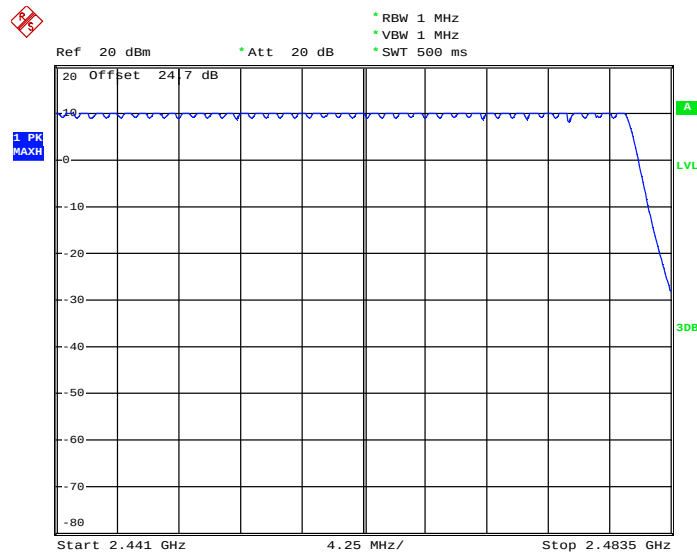

Date: 6.NOV.2012 16:34:54

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

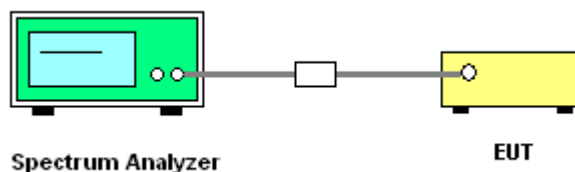


3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6053	Pass
39	2441	1.002	0.6027	Pass
78	2480	1.002	0.6053	Pass

Note:

EUT complies with the minimum channel separation requirement in 1X/EDR mode using 79 channels, and AFH mode using 20 channels. AFH mode was investigated but that the 1x/EDR mode provided a worst case scenario as compared to the AFH mode and therefore the 1x/EDR mode data was provided.

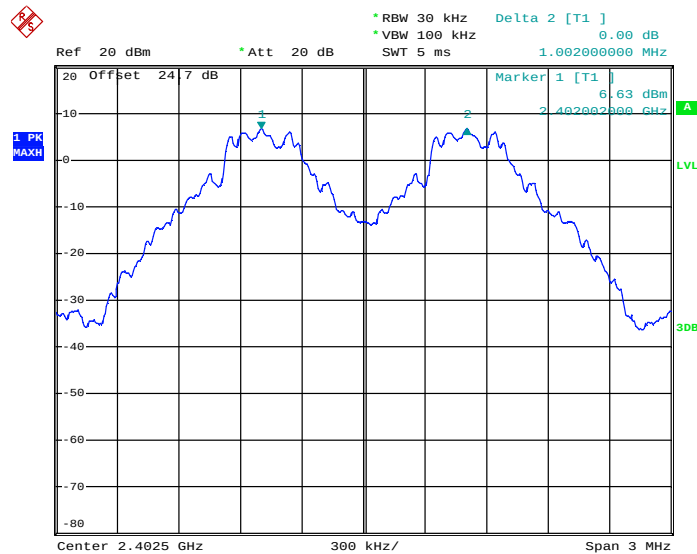Channel Separation Plot on Channel 00 - 01


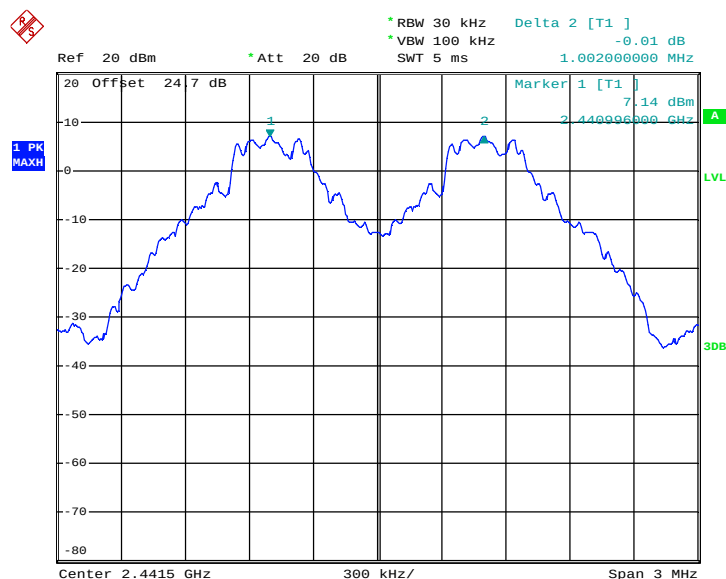
Date: 6.NOV.2012 16:18:54

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Example: the Hopping Channel Separation test item, the peak point of fundamental signal is 6.63dBm, has added (offset) with the total loss = attenuator factor + cable loss = 24.7dB, where, cable loss = 4.7dB and 20dB attenuator, and then the Hopping Channel Separation is measured and compliance with the limit line. Hereafter, each plot of spectrum analyzer has been added the total loss respectively and to demonstrate in compliance with the limit line.


Channel Separation Plot on Channel 39 - 40



Date: 6.NOV.2012 16:19:34

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

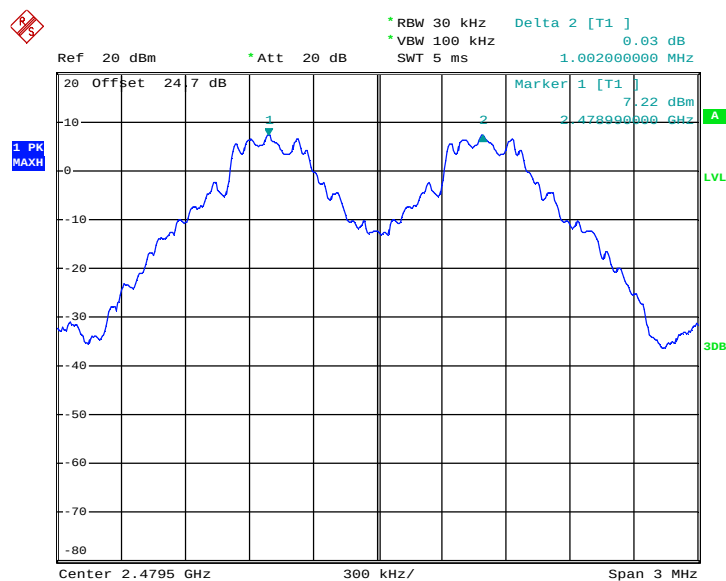Channel Separation Plot on Channel 77 - 78


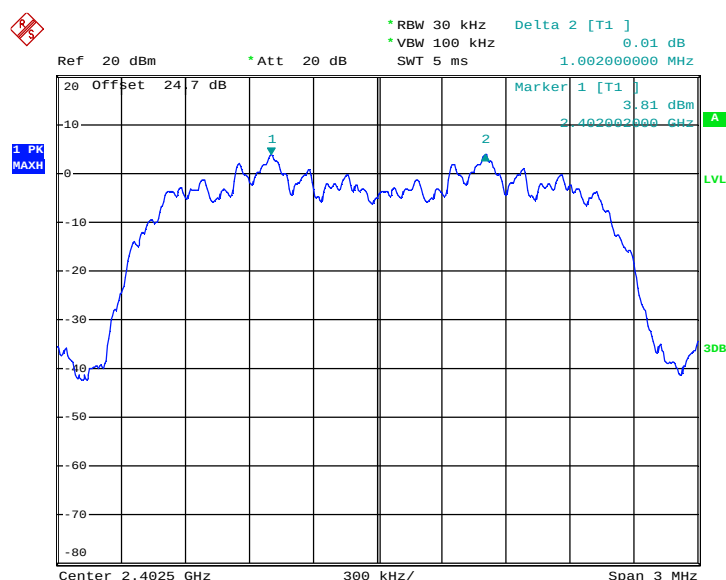
Date: 6.NOV.2012 16:20:23

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.9000	Pass
39	2441	1.002	0.9000	Pass
78	2480	1.002	0.9000	Pass

Channel Separation Plot on Channel 00 - 01


Date: 6.NOV.2012 16:22:18

Note:


The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

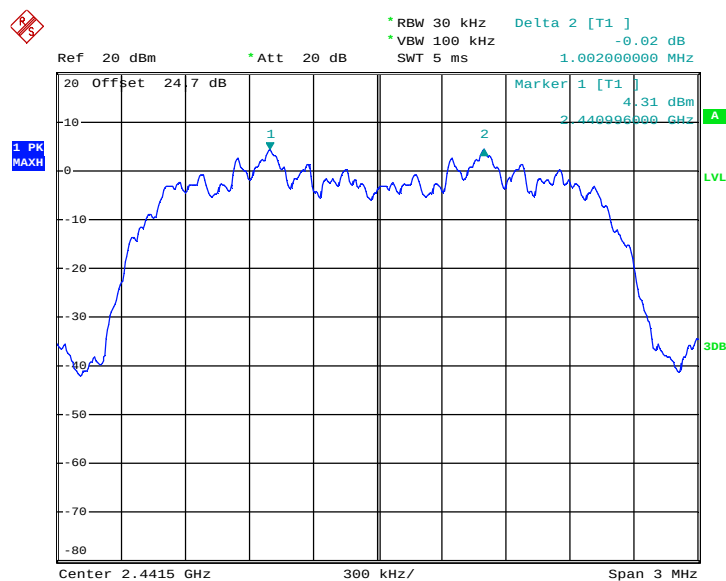Channel Separation Plot on Channel 39 - 40


Date: 6.NOV.2012 16:22:58

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

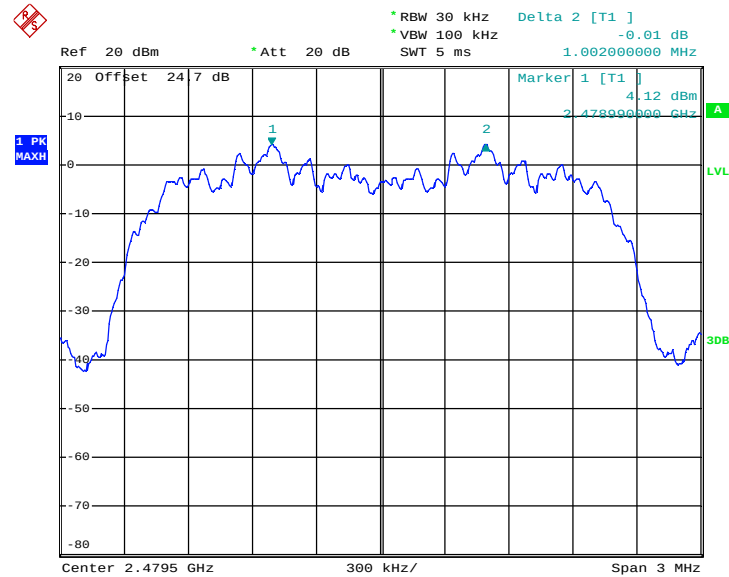Channel Separation Plot on Channel 77 - 78


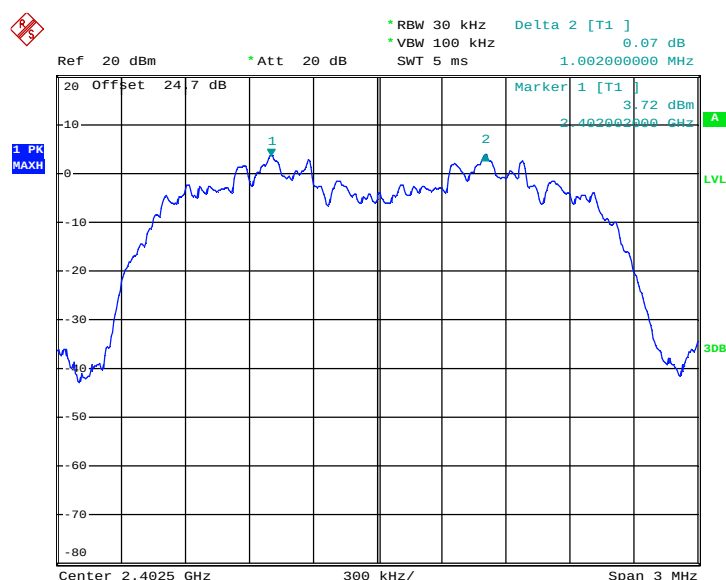
Date: 6.NOV.2012 16:23:38

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8560	Pass
39	2441	1.002	0.8560	Pass
78	2480	1.002	0.8560	Pass

Channel Separation Plot on Channel 00 - 01


Date: 6.NOV.2012 16:24:28

Note:


The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

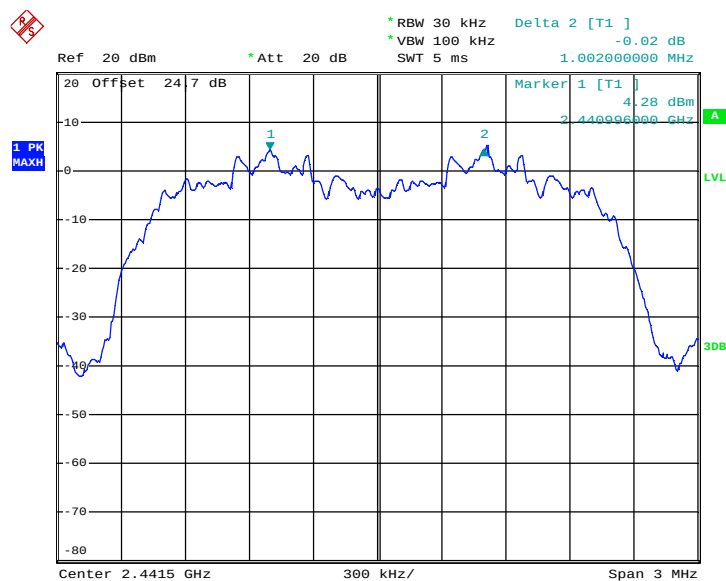Channel Separation Plot on Channel 39 - 40


Date: 6.NOV.2012 16:25:30

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

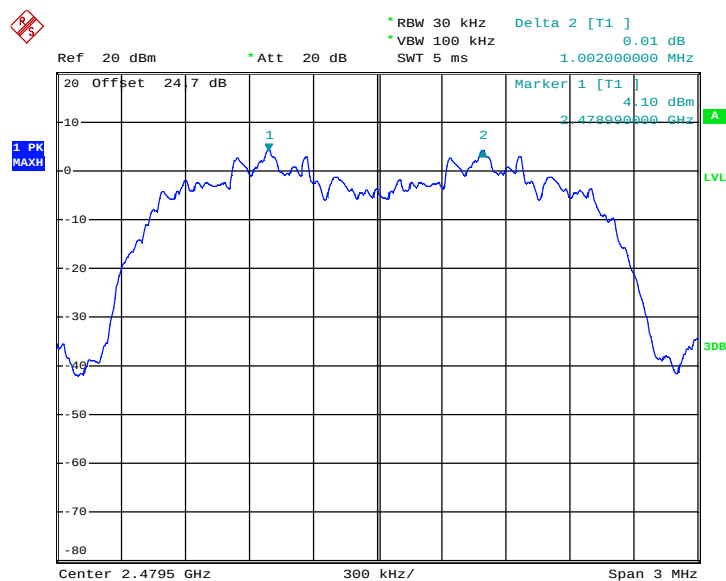Channel Separation Plot on Channel 77 - 78


Date: 6.NOV.2012 16:26:10

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

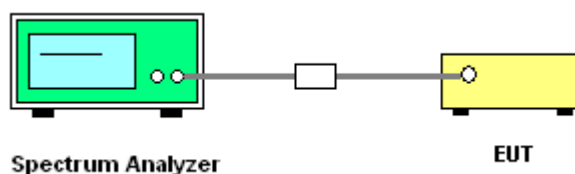


3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH5	3.50	2998.00	0.33	0.4	Pass

Remark:

- Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
- 79 channels come from the Hopping Channel number.
- Average Hopping Channel = hops/sweep time
- T: Package Transfer Time(us)
- In Bluetooth hopping operation, basic mode, the hopping rate is 1600Hz. The largest dwell time DH1/DH3/DH5 is 0.33 second of DH5, and the average time of occupancy on any channel would not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
- In Bluetooth hopping operation, AFH mode, the hopping rate is 800Hz, and the minimum hopping channel number is 20. AFH mode uses 6 total slots so the Bluetooth transmitter hops at $800/6=133.3$ hops/s/slot.
 - a) $400\text{msec} \times 20 \text{ channels} = 8 \text{ seconds}$
 - b) $133.3/20=6.67 \text{ hops/second}$, for each channel
 - c) $6.67 \times 8\text{seconds} \times 2.998\text{msec}$ (of DH5, representative as the worst case)= 159.97 msec;
this is the worst case dwell time for one channel in AFH mode.

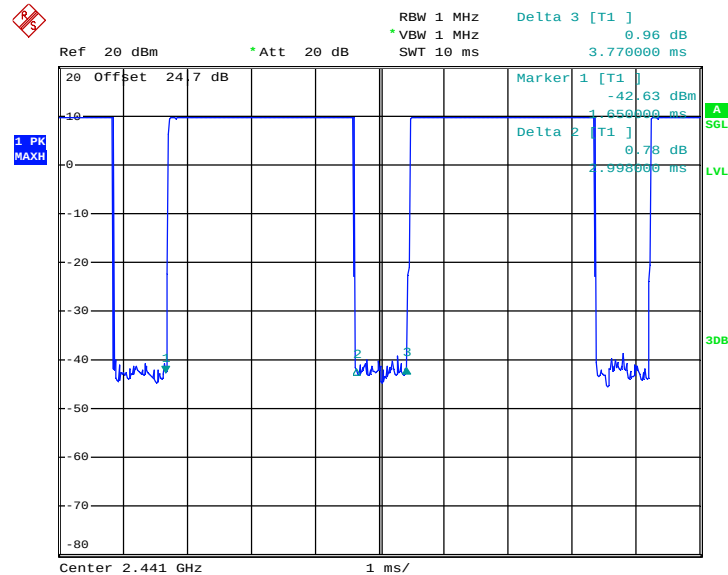
DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 6.NOV.2012 16:13:53

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

DH5 Dwell Time (Count Pulses) Plot on Channel 39

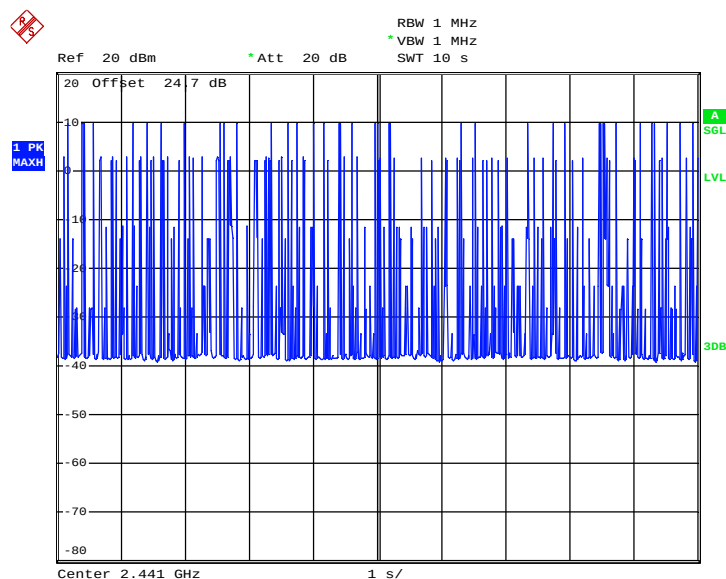

Date: 6.NOV.2012 16:35:52

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.

3.4.4 Test Setup

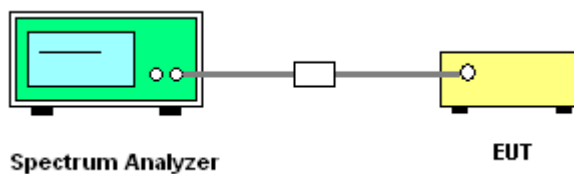


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.908
39	2441	0.904
78	2480	0.908

20 dB Bandwidth Plot on Channel 00

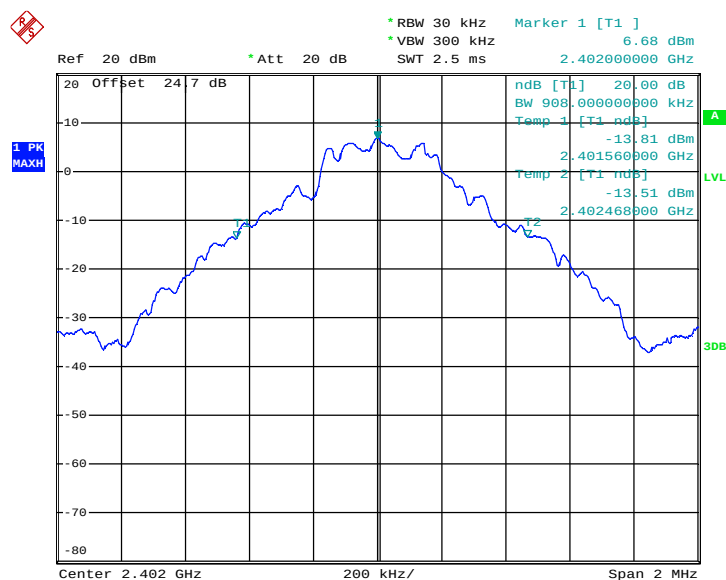


Date: 6.NOV.2012 16:38:03

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.


20 dB Bandwidth Plot on Channel 39

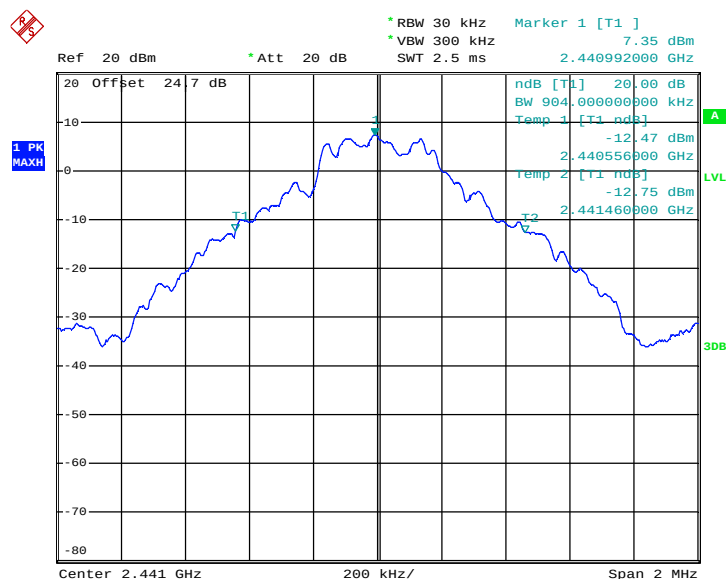

Date: 6.NOV.2012 16:38:36

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

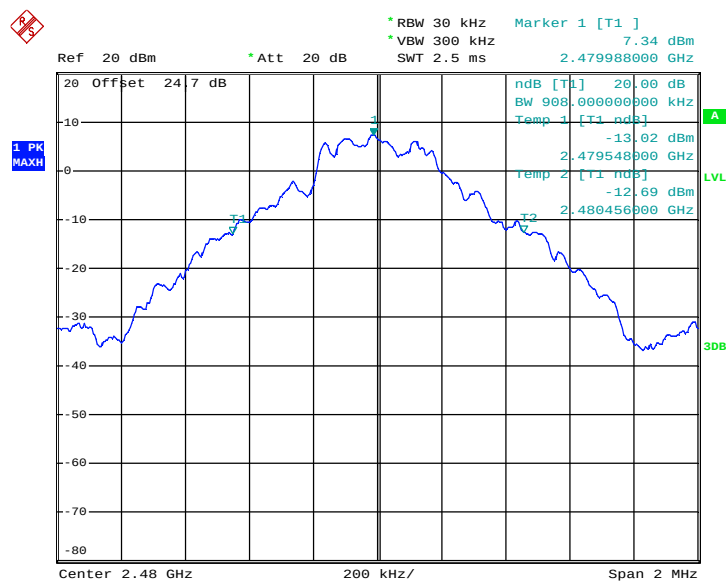20 dB Bandwidth Plot on Channel 78


Date: 6.NOV.2012 16:38:52


Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.350
39	2441	1.350
78	2480	1.350


20 dB Bandwidth Plot on Channel 00

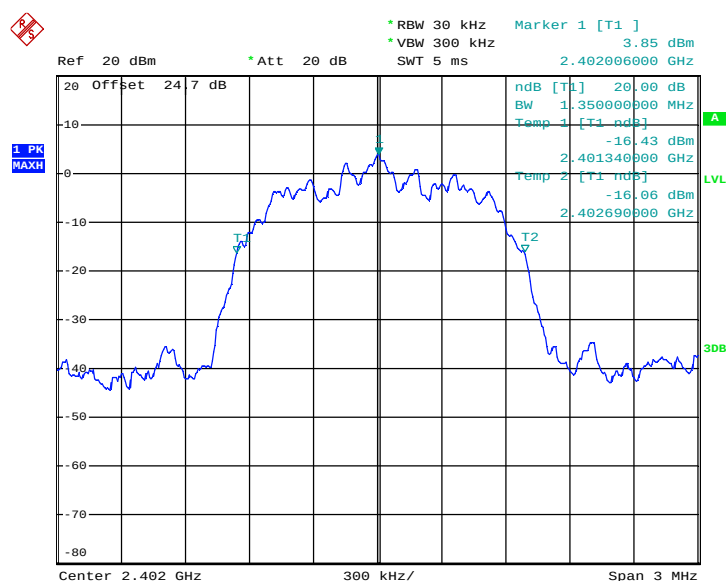

Date: 6.NOV.2012 16:39:27

Note:


The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

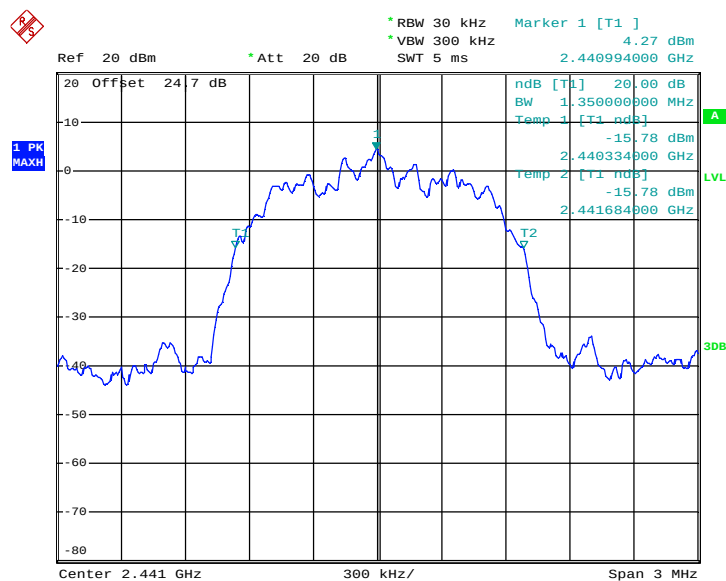20 dB Bandwidth Plot on Channel 39


Date: 6.NOV.2012 16:40:12

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

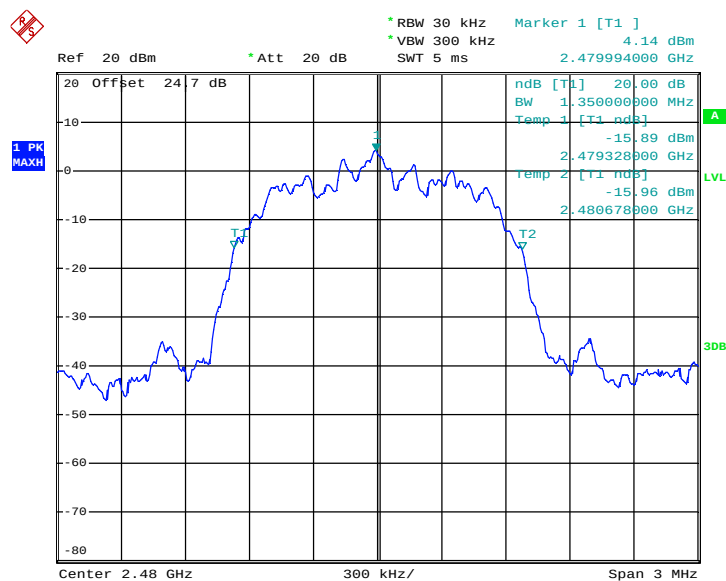20 dB Bandwidth Plot on Channel 78


Date: 6.NOV.2012 16:40:36


Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.284
39	2441	1.284
78	2480	1.284


20 dB Bandwidth Plot on Channel 00

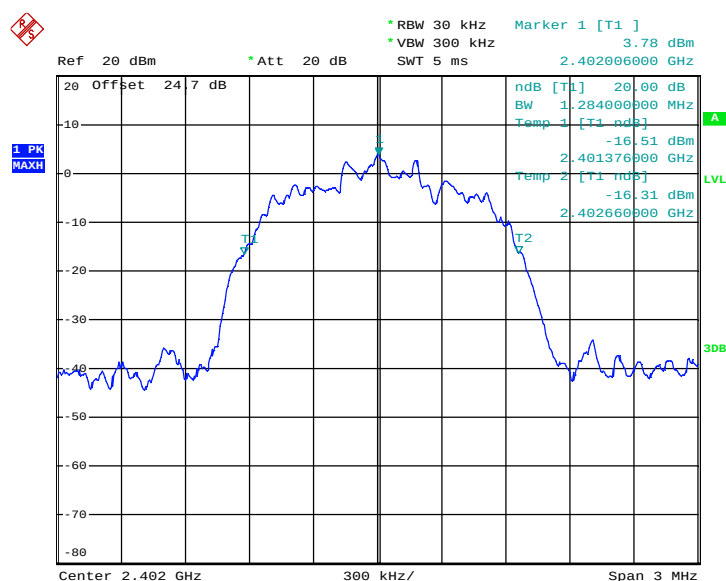

Date: 6.NOV.2012 16:41:07

Note:


The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

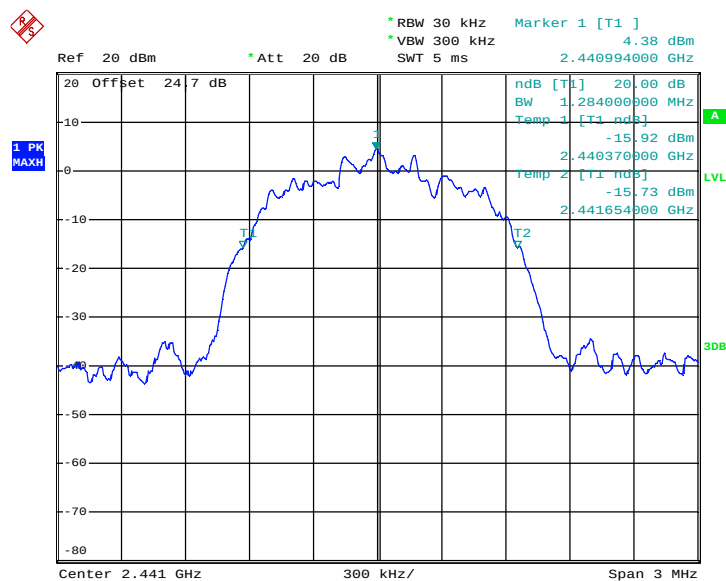20 dB Bandwidth Plot on Channel 39


Date: 6.NOV.2012 16:41:44

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

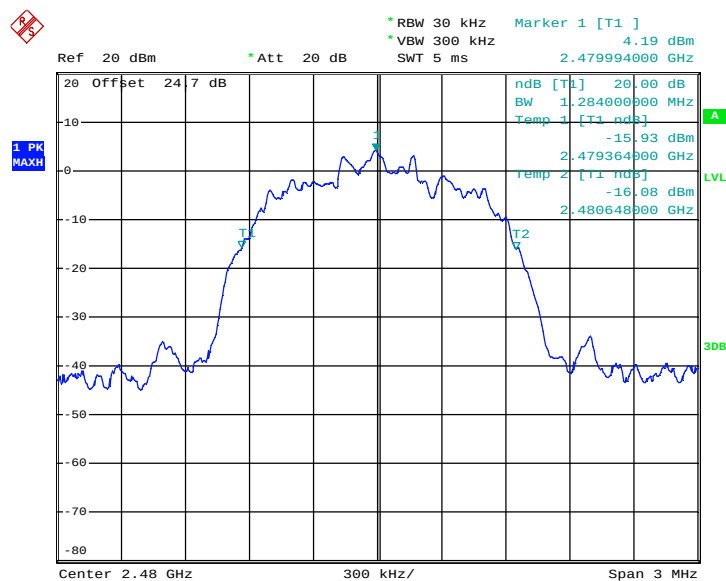20 dB Bandwidth Plot on Channel 78


Date: 6.NOV.2012 16:42:18

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

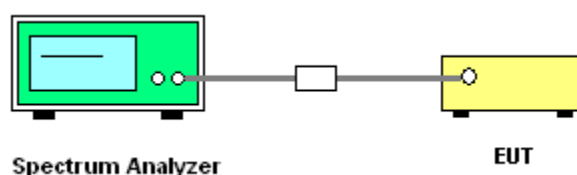


3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	9.42	30.00	Pass
39	2441	9.91	30.00	Pass
78	2480	9.93	30.00	Pass

Peak Output Power Plot on Channel 00

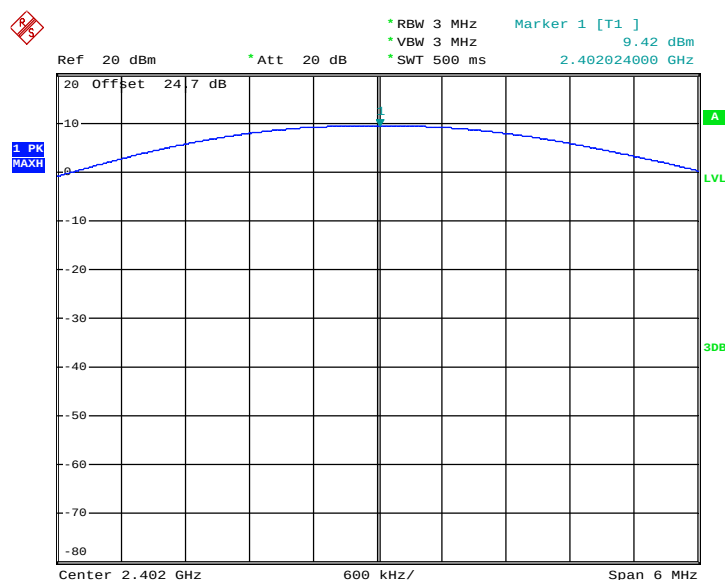


Date: 6.NOV.2012 15:37:19

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.


Peak Output Power Plot on Channel 39

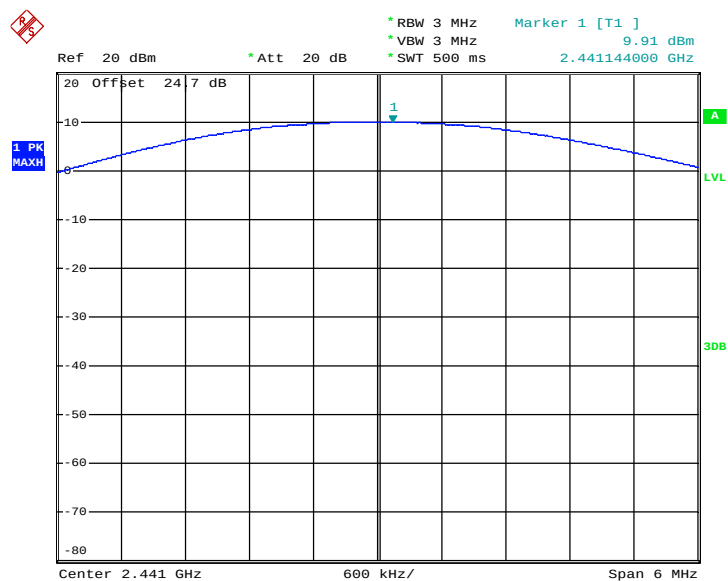

Date: 6.NOV.2012 15:38:35

Note:


The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.



The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		π /4-DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	8.59	20.97	Pass
39	2441	9.04	20.97	Pass
78	2480	8.93	20.97	Pass

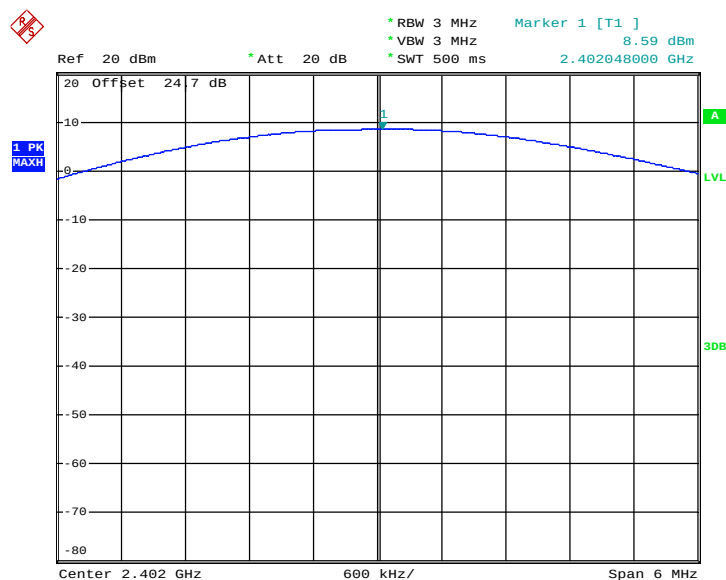
Peak Output Power Plot on Channel 00


Date: 6.NOV.2012 15:37:44

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Peak Output Power Plot on Channel 39

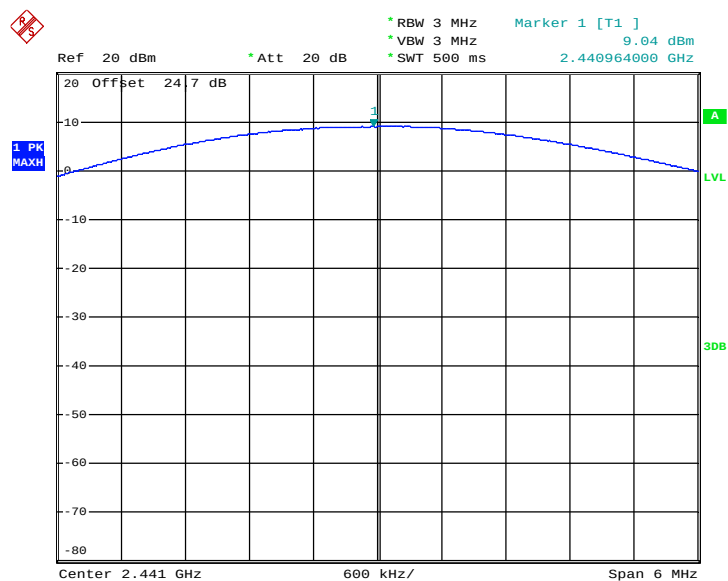


Date: 6.NOV.2012 15:39:00

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Peak Output Power Plot on Channel 78

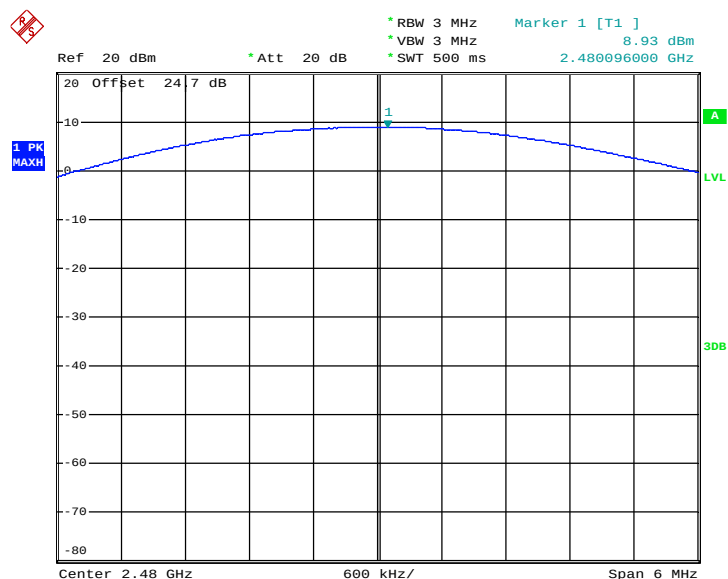


Date: 6.NOV.2012 15:40:15

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%


Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	9.03	20.97	Pass
39	2441	9.43	20.97	Pass
78	2480	9.34	20.97	Pass

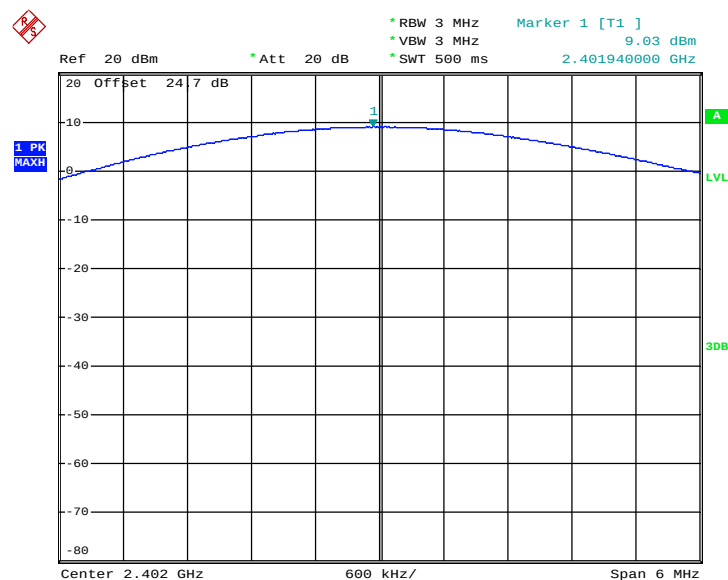Peak Output Power Plot on Channel 00


Date: 6.NOV.2012 15:38:10

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

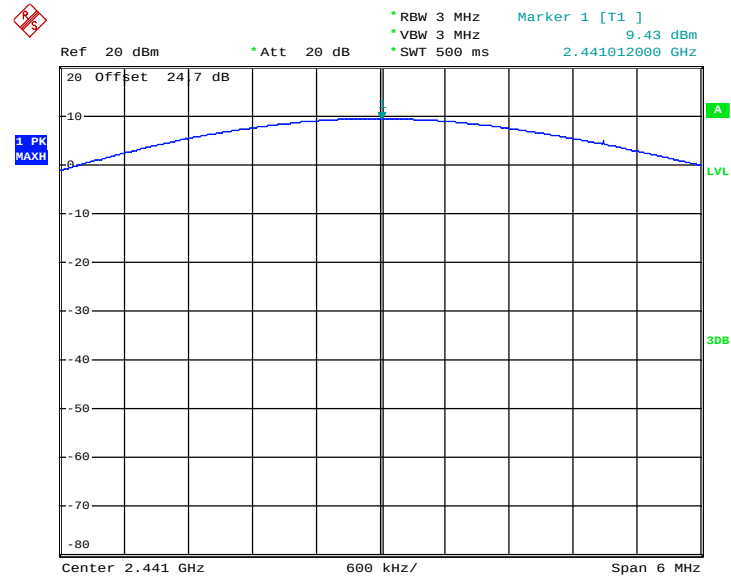
Peak Output Power Plot on Channel 39


Date: 6.NOV.2012 15:39:25

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

Peak Output Power Plot on Channel 78

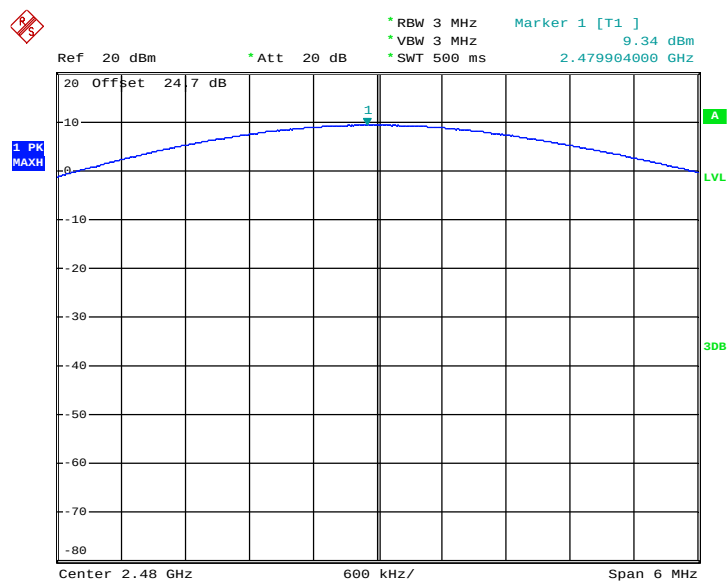

Date: 6.NOV.2012 15:40:40

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

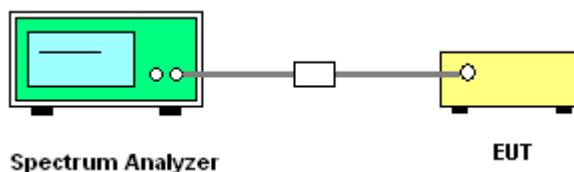

1.6.5 Test Result of Conducted Band Edges

Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Coyote Lin


Low Band Edge Plot on Channel 00

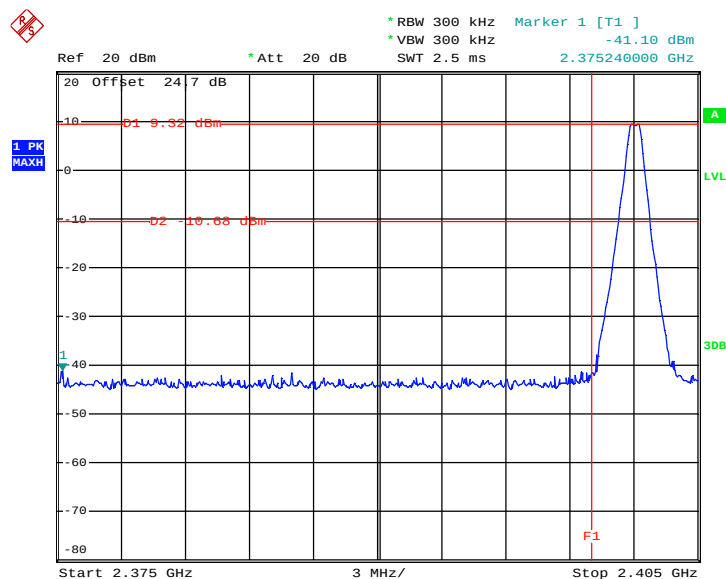

Date: 6.NOV.2012 16:43:11

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.




The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

1.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%


Hopping Mode Low Band Edge Plot

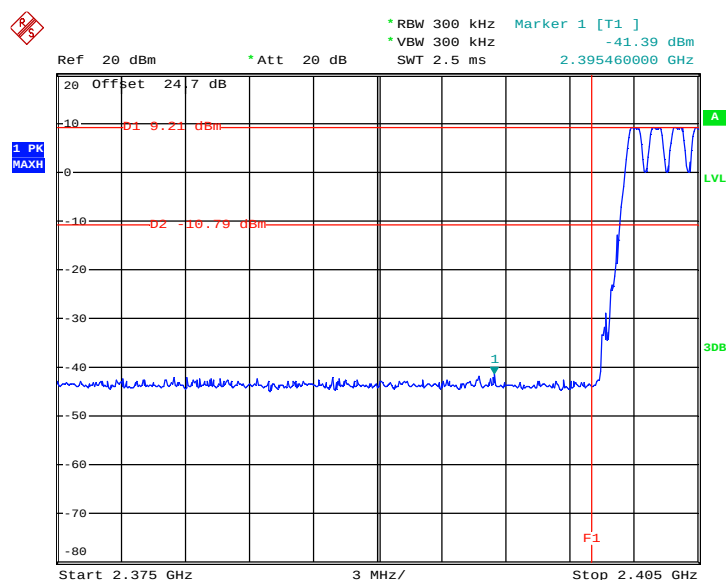

Date: 6.NOV.2012 18:06:08

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

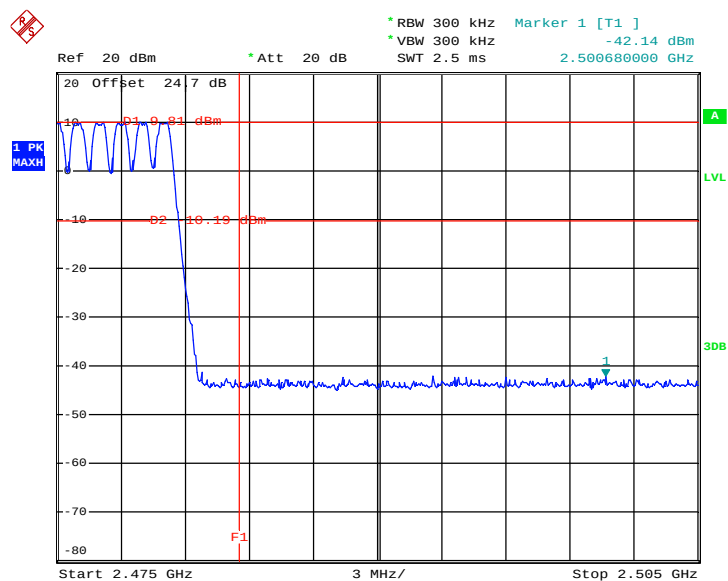Hopping Mode High Band Edge Plot


Date: 6.NOV.2012 18:07:21

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.


3.7.4 Test Setup

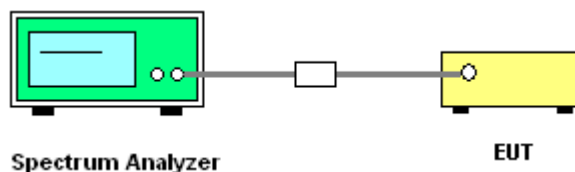

3.7.5 Test Result

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Coyote Lin


Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

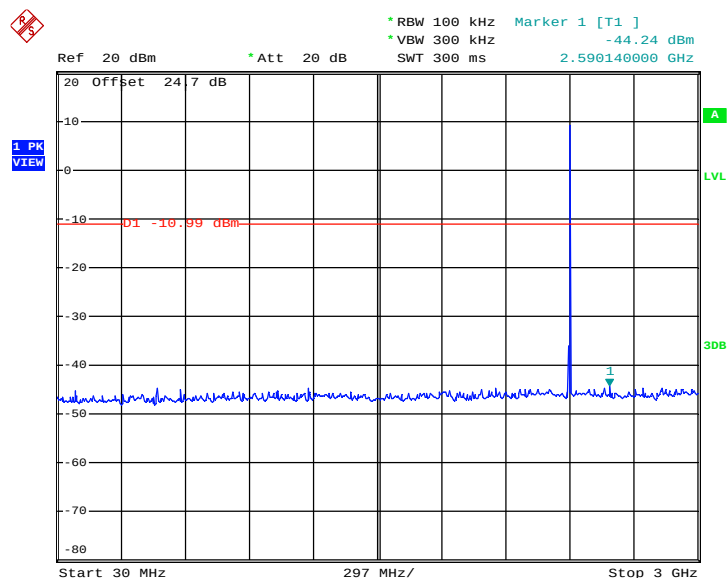

Date: 6.NOV.2012 16:57:22

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

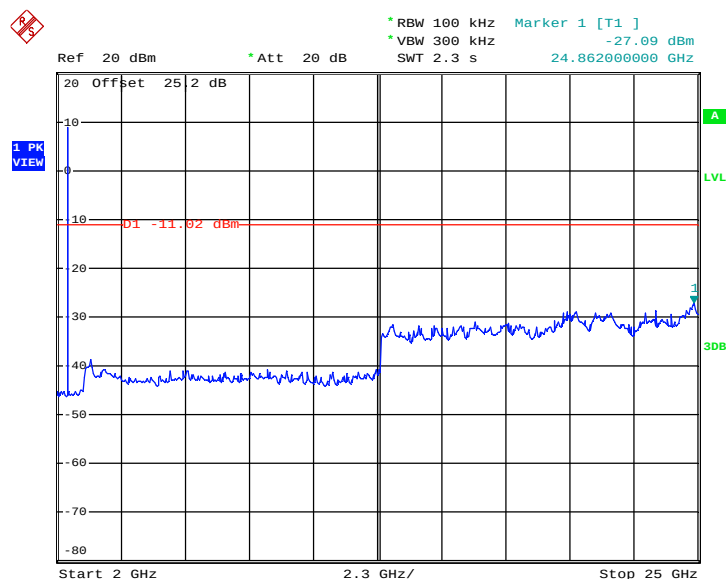
Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz


Date: 6.NOV.2012 16:58:14

Note:

The total loss is 25.2dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Coyote Lin

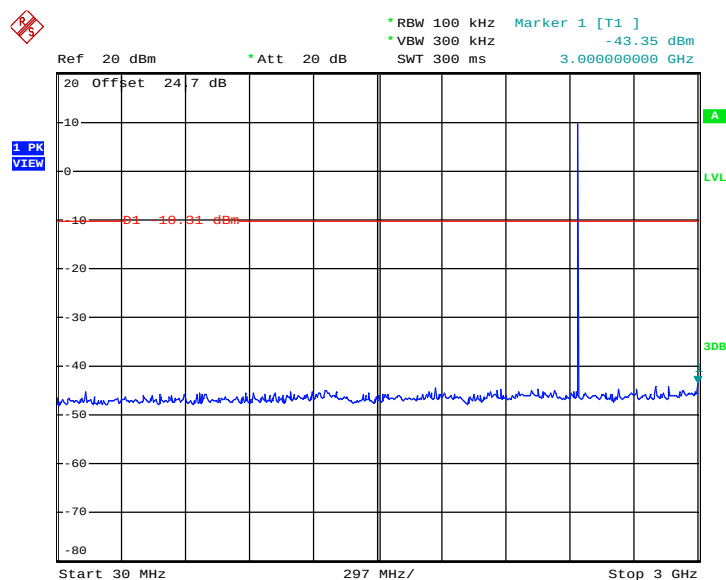Conducted Spurious Emission Plot between 30MHz ~ 3 GHz


Date: 6.NOV.2012 16:59:06

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

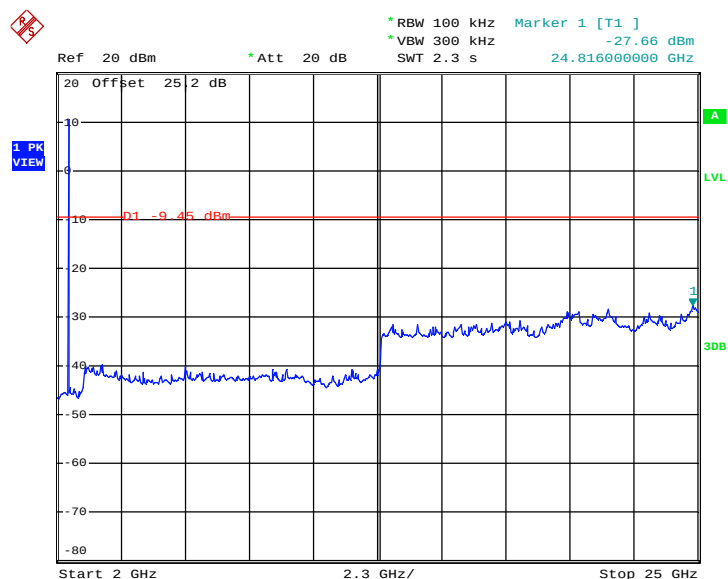
Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz


Date: 6.NOV.2012 16:59:59

Note:

The total loss is 25.2dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Coyote Lin

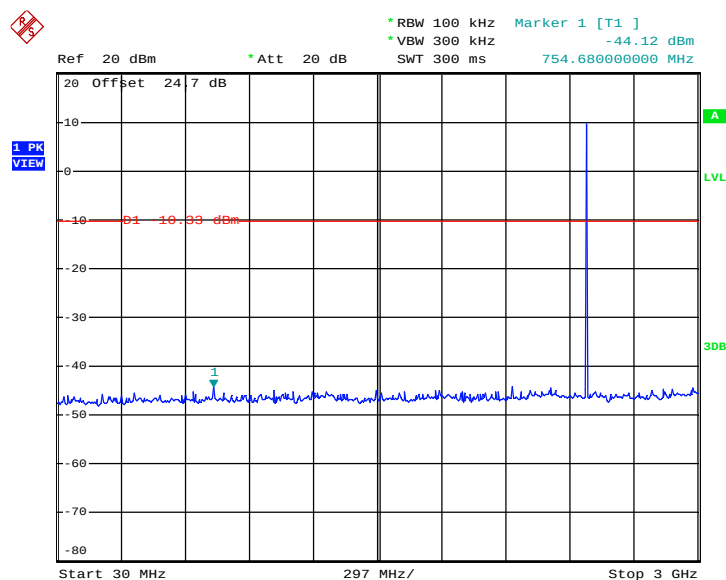Conducted Spurious Emission Plot between 30MHz ~ 3 GHz


Date: 6.NOV.2012 17:00:51

Note:

The total loss is 24.7dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

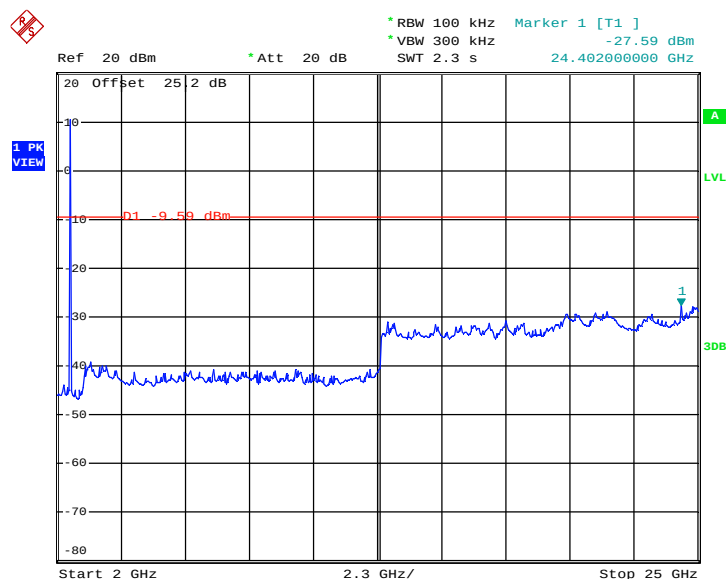Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz


Date: 6.NOV.2012 17:01:43

Note:

The total loss is 25.2dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1 \text{ GHz}$; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.


For example: Average level = 45.32dBuV/m – 24.73 (dB) = 20.59dBuV/m.

3.8.4 Test Setup


For radiated emissions below 30MHz

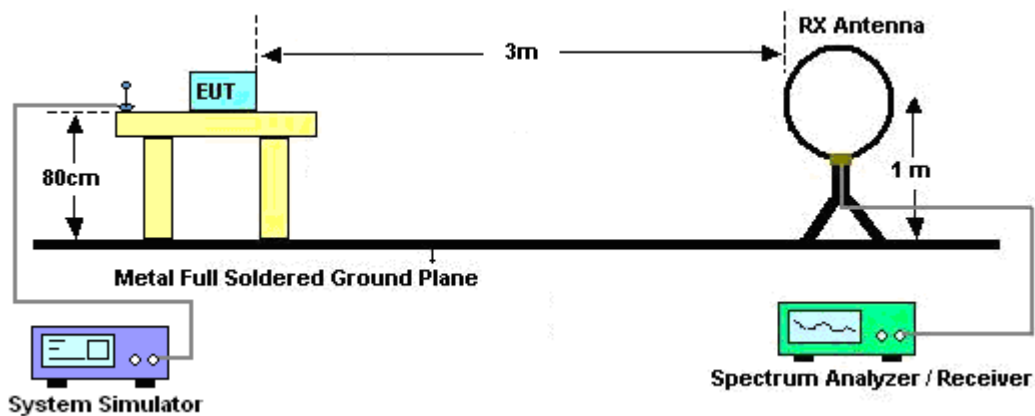

For radiated emissions from 30MHz to 1GHz

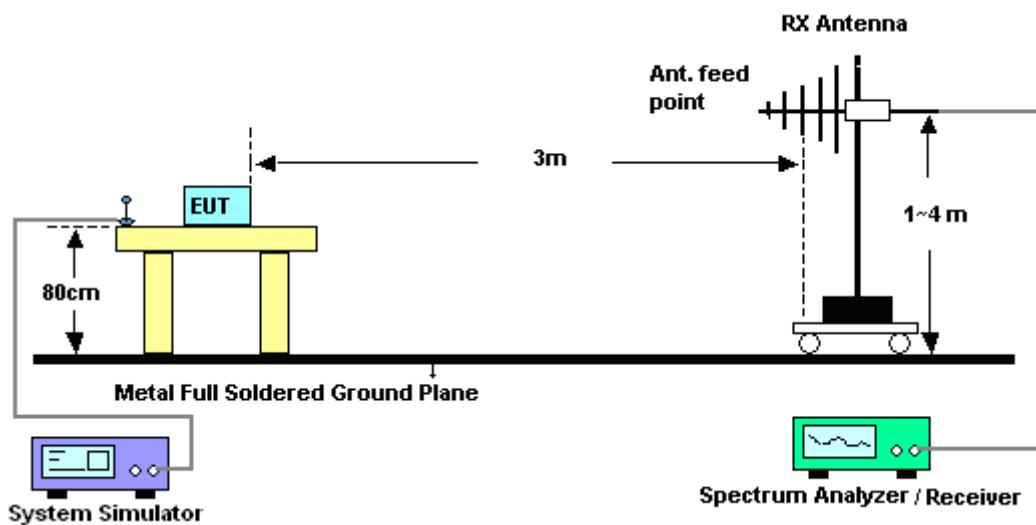


For radiated emissions above 1GHz

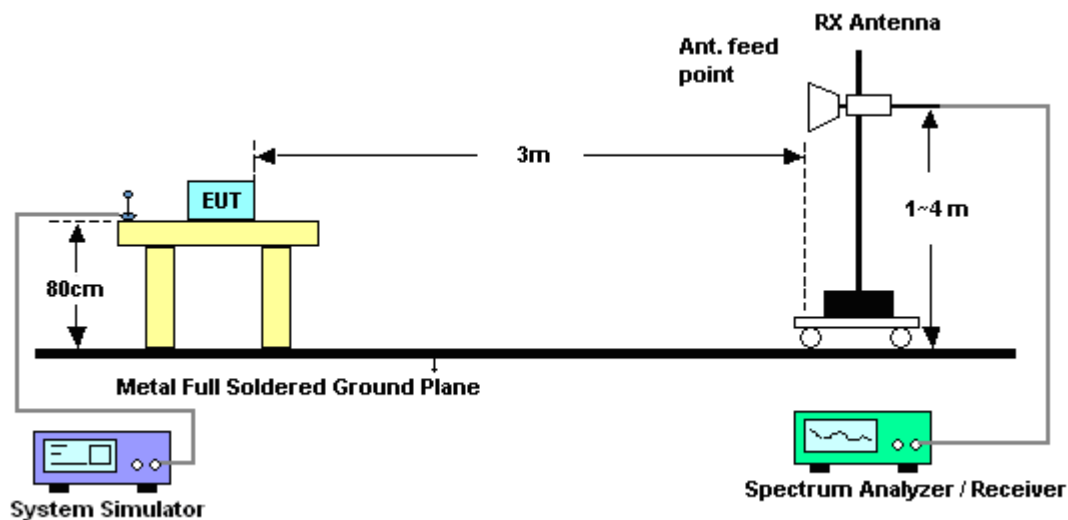


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

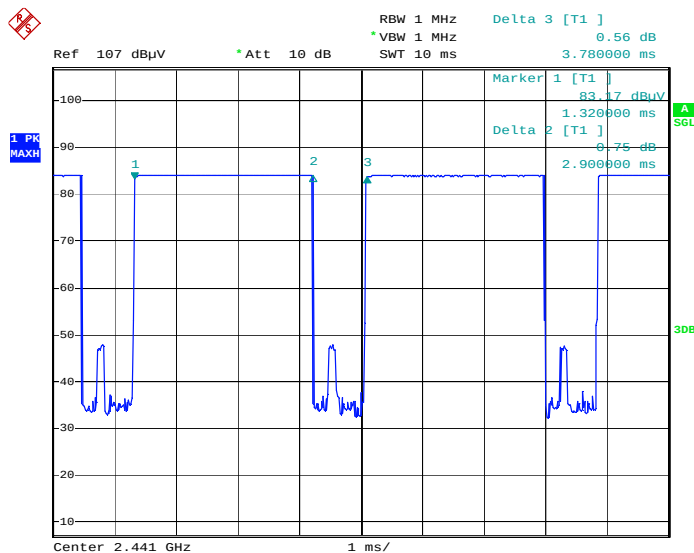DH5 on time/100ms (One Pulse) Plot on Channel 39


Date: 6.NOV.2012 19:39:29

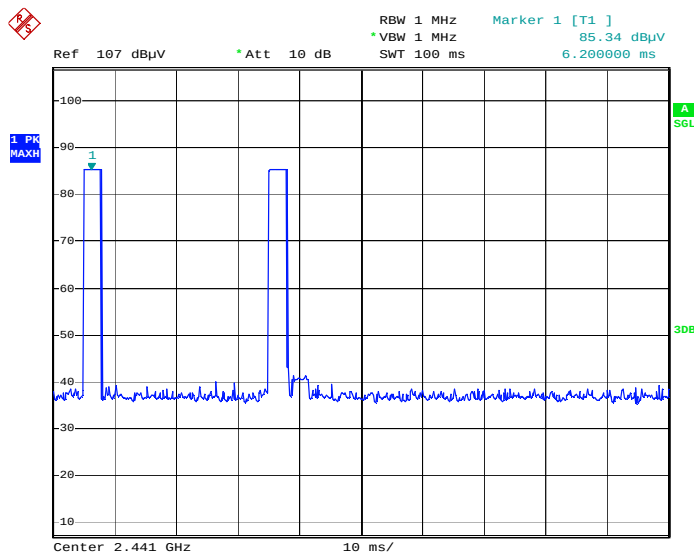DH5 on time/100ms (Count Pulses) Plot on Channel 39


Date: 6.NOV.2012 19:41:50

Note:

1. Duty cycle = on time/100 milliseconds = $2 * 2.9 / 100 = 5.80 \%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.73 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.

3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	23~24℃
Test Channel :	00	Relative Humidity :	42~43%
		Test Engineer :	Kai Wang, Timberland and Ivan Chiang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2352.21	45.32	-28.68	74	41.05	32.26	5.95	33.94	102	19	Peak
2352.21	20.59	-33.41	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2344.2	44.79	-29.21	74	40.54	32.24	5.95	33.94	131	142	Peak
2344.2	20.06	-33.94	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from $20\log(\text{dwell time}/100\text{ms})$.

For example: Average level = 45.32dBuV/m – 24.73 (dB) = 20.59dBuV/m.

Test Mode :	1Mbps	Temperature :	23~24℃
Test Channel :	78	Relative Humidity :	42~43%
		Test Engineer :	Kai Wang, Timberland and Ivan Chiang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.87	-19.13	74	50.31	32.38	6.18	34	100	14	Peak
2483.5	30.14	-23.86	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.32	-19.68	74	49.76	32.38	6.18	34	129	350	Peak
2483.5	29.59	-24.41	54	-	-	-	-	-	-	Average

3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	1Mbps	Temperature :	23~24℃
Test Channel :	00	Relative Humidity :	42~43%
Test Engineer :	Kai Wang, Timberland and Ivan Chiang	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 98.77 dBuV/m - 20dB = 78.77 dBuV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	98.77	-	-	94.4	32.3	6.03	33.96	102	19	Peak
2402	74.04	-	-	-	-	-	-	-	-	Average
7206	43.59	-35.18	78.77	55.97	35.56	10.02	57.96	100	0	Peak

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from $20\log(\text{dwell time}/100\text{ms})$.

For example: Average level = 98.77dBuV/m – 24.73 (dB) = 74.04 dBuV/m.

Test Mode :	1Mbps	Temperature :	23~24℃
Test Channel :	00	Relative Humidity :	42~43%
Test Engineer :	Kai Wang, Timberland and Ivan Chiang	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	96.59	-	-	92.22	32.3	6.03	33.96	131	142	Peak
2402	71.86	-	-	-	-	-	-	-	-	Average
7206	45.74	-30.85	76.59	58.12	35.56	10.02	57.96	100	0	Peak

Test Mode :	1Mbps	Temperature :	23~24℃
Test Channel :	39	Relative Humidity :	42~43%
Test Engineer :	Kai Wang, Timberland and Ivan Chiang	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	96.8	-	-	92.32	32.35	6.11	33.98	101	11	Peak
2441	72.07	-	-	-	-	-	-	-	-	Average
7323	41.46	-32.54	74	53.91	35.53	10.06	58.04	100	0	Peak
7323	16.73	-37.27	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	23~24℃
Test Channel :	39	Relative Humidity :	42~43%
Test Engineer :	Kai Wang, Timberland and Ivan Chiang	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	94.27	-	-	89.79	32.35	6.11	33.98	107	125	Peak
2441	69.54	-	-	-	-	-	-	-	-	Average
7323	43.55	-30.45	74	56	35.53	10.06	58.04	100	0	Peak
7323	18.82	-35.18	54	-	-	-	-	-	-	Average

Test Mode :	3Mbps	Temperature :	23~24℃
Test Channel :	78	Relative Humidity :	42~43%
Test Engineer :	Kai Wang, Timberland and Ivan Chiang	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.96	27.42	-12.58	40	46.83	11.7	0.64	31.75	100	56	Peak
200.91	23.49	-20.01	43.5	44.32	9.17	1.32	31.32	-	-	Peak
285.96	29.67	-16.33	46	46.31	13.11	1.67	31.42	-	-	Peak
309.8	26.73	-19.27	46	42.57	13.56	1.79	31.19	-	-	Peak
638.8	22.28	-23.72	46	29.75	20.11	2.81	30.39	-	-	Peak
811.7	24.75	-21.25	46	29.61	22.22	3.17	30.25	-	-	Peak
2480	96.92	-	-	92.36	32.38	6.18	34	100	14	Peak
2480	72.19	-	-	-	-	-	-	-	-	Average
7440	40.43	-33.57	74	52.92	35.51	10.12	58.12	100	0	Peak
7440	15.7	-38.3	54	-	-	-	-	-	-	Average

Test Mode :	3Mbps	Temperature :	23~24℃
Test Channel :	78	Relative Humidity :	42~43%
Test Engineer :	Kai Wang, Timberland and Ivan Chiang	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	28.25	-11.75	40	39.59	20	0.53	31.87	100	98	Peak
91.02	16.44	-27.06	43.5	38.42	8.72	0.95	31.65	-	-	Peak
184.44	19.95	-23.55	43.5	40.99	8.94	1.26	31.24	-	-	Peak
349.7	22.2	-23.8	46	36.98	14.66	1.97	31.41	-	-	Peak
689.2	22.48	-23.52	46	29.51	20.51	2.92	30.46	-	-	Peak
941.2	25.71	-20.29	46	29.4	23.71	3.44	30.84	-	-	Peak
2480	94.24	-	-	89.68	32.38	6.18	34	129	350	Peak
2480	69.51	-	-	-	-	-	-	-	-	Average
7440	42.41	-31.59	74	66	0	10.12	33.71	100	0	Peak
7440	17.68	-36.32	54	-	-	-	-	-	-	Average

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

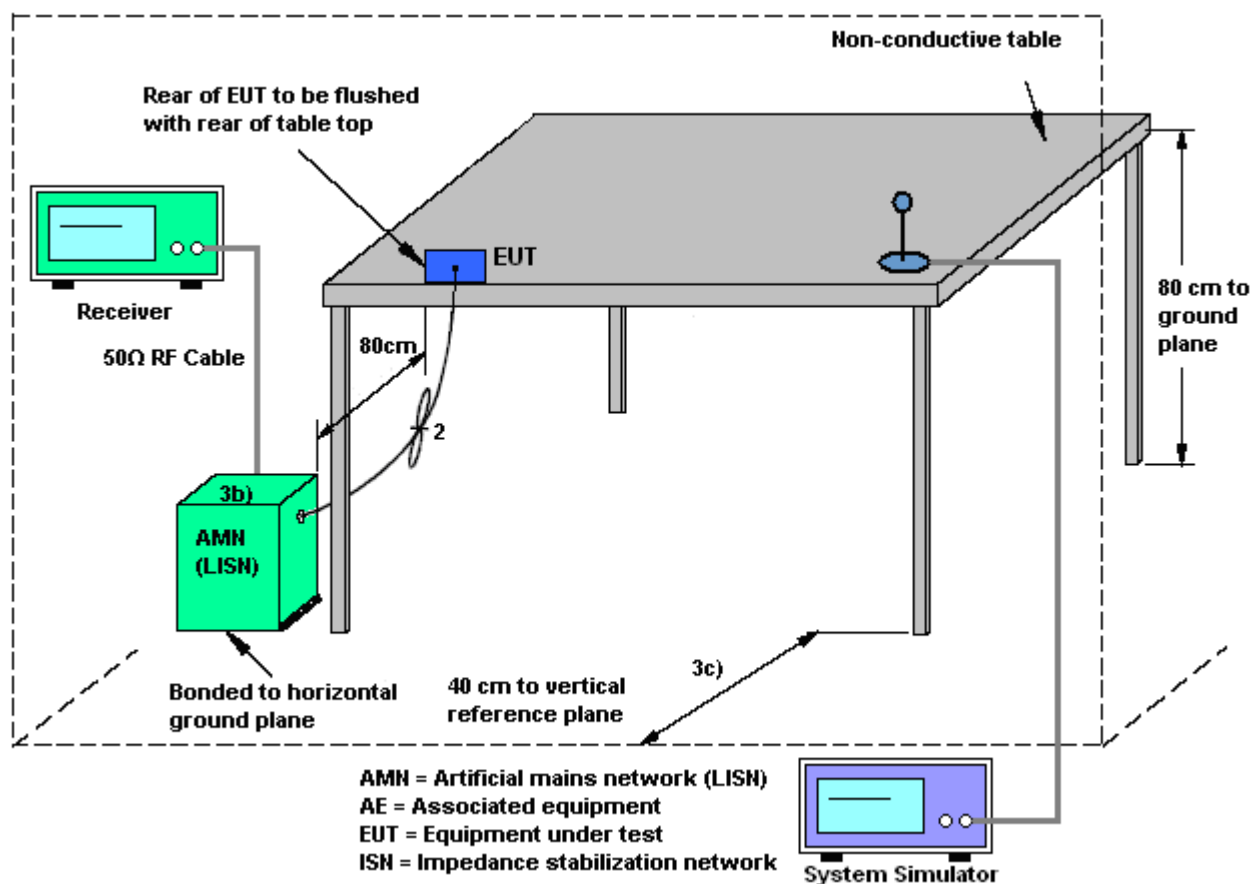

3.9.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

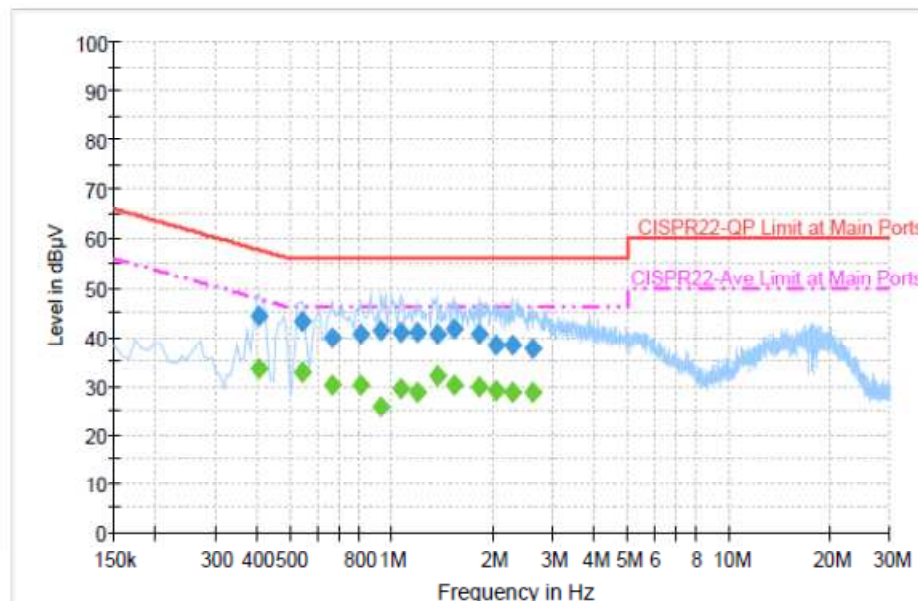

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.406000	44.2	Off	L1	19.4	13.5	57.7
0.542000	43.2	Off	L1	19.4	12.8	56.0
0.670000	40.0	Off	L1	19.5	16.0	56.0
0.806000	40.5	Off	L1	19.5	15.5	56.0
0.926000	41.5	Off	L1	19.4	14.5	56.0
1.070000	41.0	Off	L1	19.4	15.0	56.0
1.190000	41.0	Off	L1	19.5	15.0	56.0
1.366000	40.5	Off	L1	19.5	15.5	56.0
1.534000	41.6	Off	L1	19.4	14.4	56.0
1.822000	40.6	Off	L1	19.5	15.4	56.0
2.046000	38.5	Off	L1	19.5	17.5	56.0
2.278000	38.2	Off	L1	19.6	17.8	56.0
2.606000	37.7	Off	L1	19.6	18.3	56.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

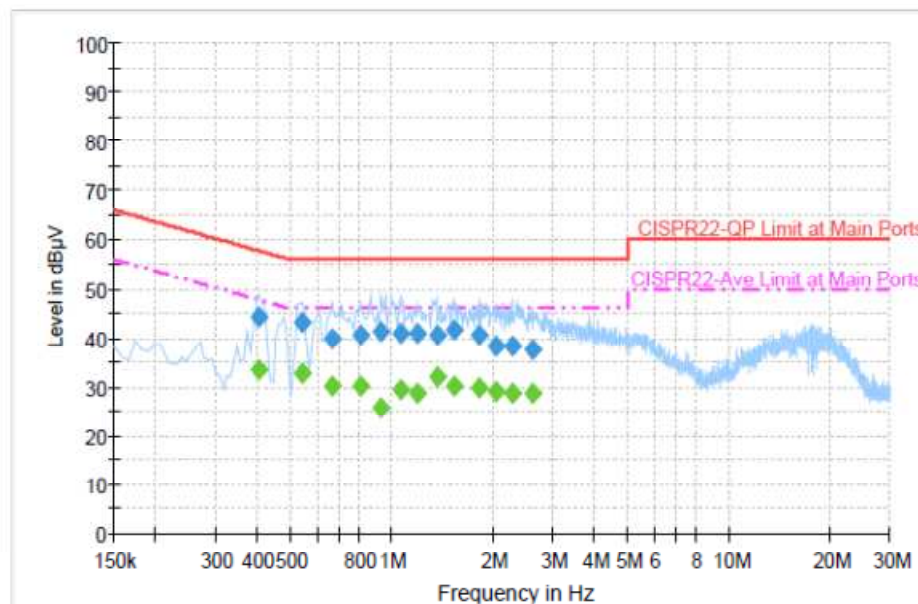
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.406000	33.5	Off	L1	19.4	14.2	47.7
0.542000	32.8	Off	L1	19.4	13.2	46.0
0.670000	30.3	Off	L1	19.5	15.7	46.0
0.806000	30.1	Off	L1	19.5	15.9	46.0
0.926000	25.9	Off	L1	19.4	20.1	46.0
1.070000	29.4	Off	L1	19.4	16.6	46.0
1.190000	28.6	Off	L1	19.5	17.4	46.0
1.366000	32.1	Off	L1	19.5	13.9	46.0
1.534000	30.1	Off	L1	19.4	15.9	46.0
1.822000	29.7	Off	L1	19.5	16.3	46.0
2.046000	29.2	Off	L1	19.5	16.8	46.0
2.278000	28.6	Off	L1	19.6	17.4	46.0
2.606000	28.7	Off	L1	19.6	17.3	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

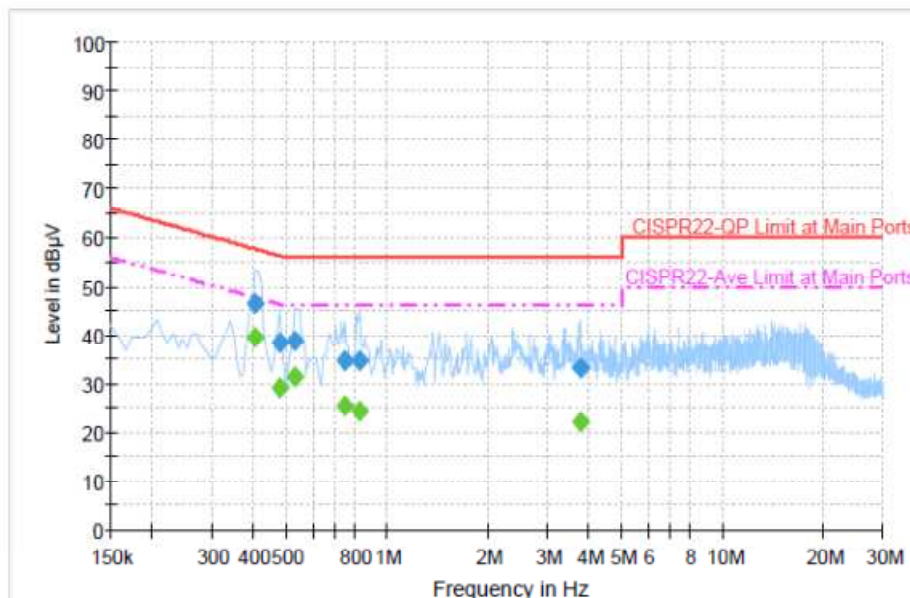
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	46.6	Off	N	19.4	11.1	57.7
0.478000	38.5	Off	N	19.4	17.9	56.4
0.534000	38.7	Off	N	19.4	17.3	56.0
0.750000	34.7	Off	N	19.4	21.3	56.0
0.830000	34.8	Off	N	19.5	21.2	56.0
3.750000	33.0	Off	N	19.6	23.0	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	39.6	Off	N	19.4	8.1	47.7
0.478000	29.1	Off	N	19.4	17.3	46.4
0.534000	31.2	Off	N	19.4	14.8	46.0
0.750000	25.5	Off	N	19.4	20.5	46.0
0.830000	24.5	Off	N	19.5	21.5	46.0
3.750000	22.1	Off	N	19.6	23.9	46.0

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

Non-standard connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Nov. 06, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 05, 2012	Nov. 06, 2012	Jun. 04, 2013	Conducted (TH02-HY)
EMI Test Receiver	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Oct. 27, 2011	Oct. 12, 2012	Oct. 26, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Oct. 12, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Oct. 12, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Oct. 12, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 21, 2011	Oct. 12, 2012	Oct. 20, 2013	Conduction (CO05-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Nov. 06, 2012	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Nov. 06, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 22, 2012	Nov. 06, 2012	Aug. 21, 2013	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Nov. 06, 2012	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	159088	1GHz ~ 18GHz	Mar. 10, 2012	Nov. 06, 2012	Mar. 09, 2013	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Feb. 27, 2012	Nov. 06, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Nov. 06, 2012	Sep. 02, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Nov. 06, 2012	Sep. 27, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Nov. 06, 2012	Jul. 02, 2014	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Feb. 09, 2012	Nov. 06, 2012	Feb. 08, 2014	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------

