

# TEST REPORT

of

**FCC Part 15 Subpart B & C §15.249/ RSS-210 Issue 8, RSS-Gen Issue 3**

FCC ID /IC Certification: A3LSM3PWP/649E-SM3PWP

Equipment Under Test : 2.4G Wireless Mouse  
Model Name : AA-SM3PWPB (Alt: AA-SM3PWPS)  
Serial No. : N/A  
Applicant : SAMSUNG ELECTRONICS CO., LTD.  
Manufacturer : Areson Technology Corp.  
Date of Test(s) : 2011. 06. 01 ~ 2011. 06. 27  
Date of Issue : 2011. 08. 02

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2011. 08. 02

Grant Lee

Approved By:



Date

2011. 08. 02

Charles Kim

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Korea Co., Ltd. (Gurp Laboratory)

8-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.kr.sgs.com/ee](http://www.kr.sgs.com/ee)

## Table of contents

|                                                                             |           |
|-----------------------------------------------------------------------------|-----------|
| <b>1. General information -----</b>                                         | <b>3</b>  |
| <b>2. Fundamental, Spurious emission and edge band radiated emission --</b> | <b>6</b>  |
| <b>3. Receiver Radiated Spurious Emission-----</b>                          | <b>13</b> |
| <b>4. 99% Bandwidth -----</b>                                               | <b>14</b> |
| <b>5. RF Exposure evaluation -----</b>                                      | <b>17</b> |

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General information

### 1.1 Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)  
Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040  
[www.kr.sgs.com/ee](http://www.kr.sgs.com/ee)

Telephone : +82 +31 428 5700  
FAX : +82 +31 427 2371

### 1.2 Details of applicant

Applicant : SAMSUNG ELECTRONICS CO., LTD.  
Address : 416, Maetan-3dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, KR  
Contact Person : Lee, Sang Cheong  
Phone No. : +82 +10 8000 0700

### 1.3. Description of EUT

|                      |                                                 |
|----------------------|-------------------------------------------------|
| Kind of Product      | 2.4G Wireless Mouse                             |
| Model Name           | AA-SM3PWPB (Alternative model name: AA-SM3PWPS) |
| Serial Number        | N/A                                             |
| Power Supply         | DC 3 V (Lithium Battery)                        |
| Frequency Range      | 2 402 MHz ~ 2 472 MHz                           |
| Modulation Technique | GFSK                                            |
| Number of Channels   | 79                                              |
| Antenna Type         | Fixed Type                                      |
| Antenna Gain         | -9.90 dBi                                       |
| H/W version          | Rev1.0                                          |
| S/W version          | Rev1.0                                          |

### 1.4 Details of modification

-N/A

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.5. Test equipment list

| Equipment         | Manufacturer                  | Model                                | Serial Number | Cal Due.      |
|-------------------|-------------------------------|--------------------------------------|---------------|---------------|
| Signal Generator  | Agilent                       | E4438C                               | MY42082477    | Mar 31, 2012  |
| Spectrum Analyzer | R & S                         | FSV30                                | 100955        | Apr. 01, 2012 |
| Power Meter       | Agilent                       | E4416A                               | GB4129123     | Mar. 31, 2012 |
| Power Sensor      | Agilent                       | E9327A                               | US40441371    | Mar. 30, 2012 |
| Attenuator        | Agilent                       | 8495B                                | MY42141937    | Apr. 01, 2012 |
| High Pass Filter  | Wainwright                    | WHK3.0/18G-10SS                      | 344           | Sep. 29, 2011 |
| DC power Supply   | Agilent                       | U8002A                               | MY48490027    | Jan. 01, 2012 |
| Preamplifier      | H.P.                          | 8447F                                | 2944A03909    | Jul. 05, 2011 |
| Preamplifier      | Agilent                       | 8449B                                | 3008A01932    | Mar. 31, 2011 |
| Test Receiver     | R & S                         | ESU26                                | 100109        | Feb. 21, 2012 |
| Bilog Antenna     | SCHWARZBECK<br>MESSELEKTRONIK | VULB9163                             | 396           | Jul. 22, 2011 |
| Horn Antenna      | Rohde & Schwarz               | HF 906                               | 100326        | Oct. 08, 2011 |
| Antenna Master    | EMCO                          | 1050                                 | 1228          | N.C.R.        |
| Turn Table        | Daeil EMC                     | DI-1500                              | N/A           | N.C.R.        |
| Anechoic Chamber  | SY Corporation                | L × W × H<br>(9.6 m × 6.4 m × 6.6 m) | N/A           | N.C.R.        |
| Horn Antenna      | R & S                         | BBHA9170                             | BBHA9170431   | Mar. 17, 2012 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 1.6. Summary of test results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD:FCC Part15, RSS-210,RSS-Gen  |                            |                                                                   |          |
|-----------------------------------------------|----------------------------|-------------------------------------------------------------------|----------|
| Section in FCC 15                             | Section in RSS-210 RSS-Gen | Test Item                                                         | Result   |
| 15.209(a)<br>15.249(a)<br>15.249(d)<br>15.205 | A2.9(a),(b)                | Fundamental, Spurious emission and edge band radiated emission    | Complied |
| 15.109(a)                                     | RSS-Gen 6                  | Receiver Radiated Spurious Emission                               | Complied |
| -                                             | A8.1(1)                    | 99% Bandwidth                                                     | Complied |
| 1.1307(b)(1)                                  | RSS-Gen 5.5/<br>RSS-102    | Maximum Permissible Exposure<br>(Exposure of Humans to RF Fields) | Complied |

## 1.7. Test report revision

| Revision | Report number          | Description                 |
|----------|------------------------|-----------------------------|
| 0        | F690501/RF-RTL004772   | Initial                     |
| 1        | F690501/RF-RTL004772-1 | Retest fundamental strength |
| 2        | F690501/RF-RTL004772-2 | Added alternative model     |

## 1.8. Alternative model name


| Model name | Information                          |
|------------|--------------------------------------|
| AA-SM3PWPB | -Basic model                         |
| AA-SM3PWPS | -Only different color of basic model |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## 2. Fundamental, Spurious emission and edge band radiated emission

### 2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

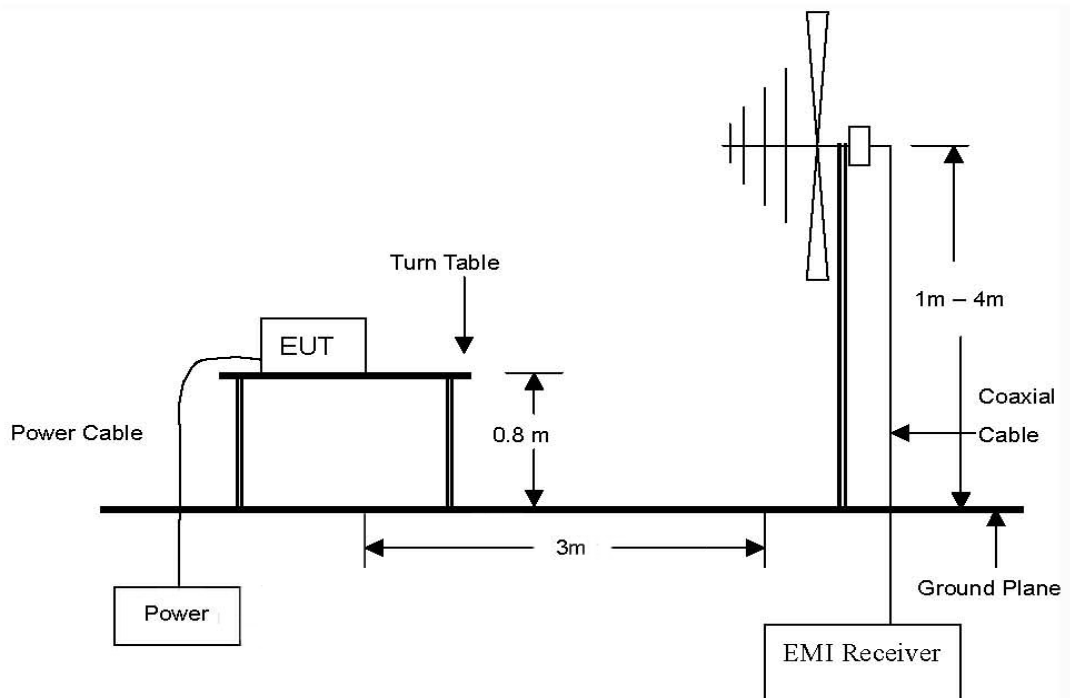

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz Emissions.

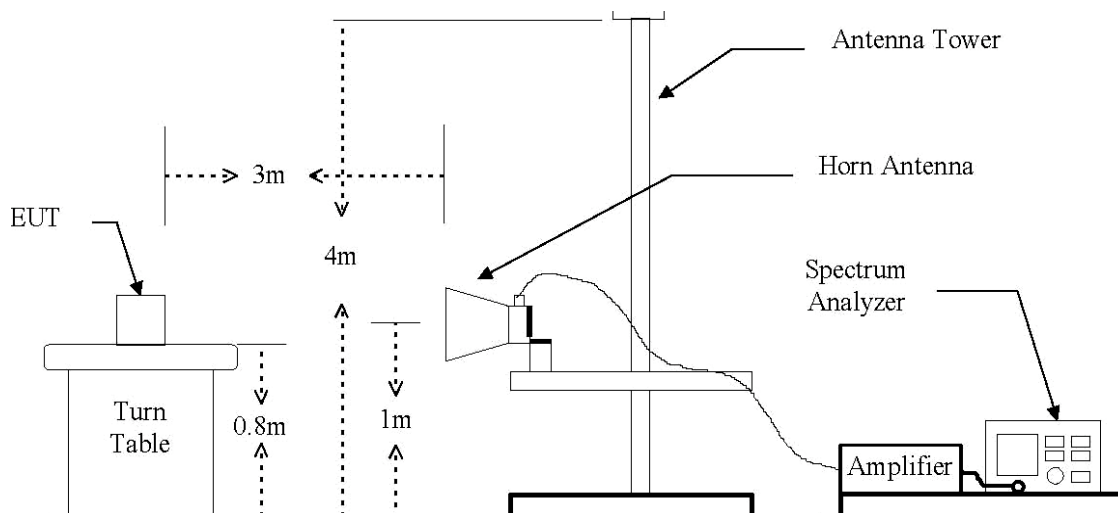

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.2. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.3. Limit

In the section 15.249(a) :

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental<br>(mV/m) | Field strength of harmonics<br>(μV/m) |
|-----------------------|-----------------------------------------|---------------------------------------|
| 902 ~ 928 MHz         | 50                                      | 500                                   |
| 2 400 ~ 2 483.5 MHz   | 50                                      | 500                                   |
| 5 725 ~ 5 875 MHz     | 50                                      | 500                                   |
| 24.0 ~ 24.25 GHz      | 250                                     | 2 500                                 |

In the section 15.209(a) :

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Fundamental frequency<br>(MHz) | Field strength<br>(μV/m) | Measurement distance<br>(m) |
|--------------------------------|--------------------------|-----------------------------|
| 30 ~ 88                        | 100*                     | 3                           |
| 88 ~ 216                       | 150*                     | 3                           |
| 216 ~960                       | 200*                     | 3                           |
| Above 960                      | 500                      | 3                           |

Remark:

Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the above emission table, the tighter limit applies at the band edges.

| Fundamental frequency<br>(MHz) | Field strength<br>(μV/m at 3 meter) | Field strength<br>(dBμV/m at 3 meter) |
|--------------------------------|-------------------------------------|---------------------------------------|
| 30 ~ 88                        | 100                                 | 40                                    |
| 88 ~ 216                       | 150                                 | 43.5                                  |
| 216 ~960                       | 200                                 | 46                                    |
| Above 960                      | 500                                 | 54                                    |

(e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test result

Ambient temperature : (23 ± 2) °C  
Relative humidity : 47 % R.H.

### 2.4.1. Below 1 GHz

| Radiated Emissions |                |             | Ant  | Correction Factors |               | Total           | FCC Limit      |             |
|--------------------|----------------|-------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 300.024            | 42.00          | Peak        | H    | 13.34              | -25.05        | 30.29           | 46.00          | 15.71       |
| 311.987            | 43.12          | Peak        | H    | 13.55              | -25.09        | 31.58           | 46.00          | 14.42       |
| 347.998            | 45.62          | Peak        | H    | 14.69              | -25.22        | 35.09           | 46.00          | 10.91       |
| 360.002            | 45.26          | Peak        | H    | 14.91              | -25.29        | 34.88           | 46.00          | 11.12       |
| 396.013            | 43.76          | Peak        | H    | 15.53              | -25.52        | 33.77           | 46.00          | 12.23       |
| 902.394            | 39.12          | Peak        | H    | 22.19              | -24.19        | 37.12           | 46.00          | 8.88        |
| Above 910.000      | Not detected   | -           | -    | -                  | -             | -               | -              | -           |

#### Remark

1. To get a maximum emission level from the EUT, the EUT was moved throughout the X, Y and Z planes.(Worst case is x-plane)
2. All spurious emission at channels are almost the same below 1 GHz, so that the channel was chosen at representative in final test.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 2.4.2. Above 1 GHz

### A. Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant  | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 401.48           | 61.57                | Peak        | H    | 28.07              | 6.26    | 95.90                 | 114.00               | 18.10       |
| 2 401.48           | 28.45                | Average     | H    | 28.07              | 6.26    | 62.78                 | 94.00                | 31.22       |
| *2 390.00          | 31.48                | Peak        | H    | 28.09              | 6.23    | 65.80                 | 74.00                | 8.20        |
| *2 390.00          | 16.29                | Average     | H    | 28.09              | 6.23    | 50.61                 | 54.00                | 3.39        |

| Radiated Emissions |                      |             | Ant  | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 803.98           | 45.98                | Peak        | H    | 32.59              | -25.03      | 53.54                 | 74.00                | 20.46       |
| 4 803.98           | 32.31                | Average     | H    | 32.59              | -25.03      | 39.87                 | 54.00                | 14.13       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

### B. Middle Channel (2 432 MHz)

| Radiated Emissions |                      |             | Ant  | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 431.76           | 60.57                | Peak        | H    | 28.01              | 6.28    | 94.86                 | 114.00               | 19.14       |
| 2 431.76           | 27.25                | Average     | H    | 28.01              | 6.28    | 61.54                 | 94.00                | 32.46       |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

| Radiated Emissions |                      |             | Ant  | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 864.88           | 45.51                | Peak        | H    | 32.82              | -25.30      | 53.03                 | 74.00                | 20.97       |
| 4 864.88           | 32.07                | Average     | H    | 32.82              | -25.30      | 39.59                 | 54.00                | 14.41       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

#### C. High Channel (2 472 MHz)

| Radiated Emissions |                      |             | Ant  | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 471.93           | 59.37                | Peak        | H    | 28.05              | 6.33    | 93.75                 | 114.00               | 20.25       |
| 2 471.93           | 28.41                | Average     | H    | 28.05              | 6.33    | 62.78                 | 94.00                | 31.22       |
| *2 483.500         | 29.39                | Peak        | H    | 28.09              | 6.36    | 63.83                 | 74.00                | 10.17       |
| *2 483.500         | 16.44                | Average     | H    | 28.09              | 6.36    | 50.88                 | 54.00                | 3.12        |

| Radiated Emissions |                      |             | Ant  | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 943.12           | 45.95                | Peak        | H    | 33.18              | -24.58      | 54.55                 | 74.00                | 19.45       |
| 4 943.12           | 32.04                | Average     | H    | 33.18              | -24.58      | 40.64                 | 54.00                | 13.36       |
| Above 5 000.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

#### Remarks ;

1. "\*" means the restricted band.
2. To get a maximum emission level from the EUT, the EUT was moved throughout the X, Y and Z planes.(Worst case is x-plane)
3. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental Frequency.
4. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
5. Average test would be performed if the peak result were greater than the average limit.
6. Actual = Reading + AF - Amp Gain + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

### 3. Receiver Radiated spurious emissions

#### 3.1. Test setup - Same as clause 4.1.

##### 3.1.1. Receiver Radiated Spurious Emissions - Same as clause 4.1.1.

#### 3.2. Limit

According to RSS-Gen(6), all spurious emissions shall comply with the limits of Table.

| Frequency<br>(MHz) | Distance<br>(Meters) | Radiated<br>(dB $\mu$ V/m) | Radiated<br>( $\mu$ V/m) |
|--------------------|----------------------|----------------------------|--------------------------|
| 30 - 88            | 3                    | 40.0                       | 100                      |
| 88 – 216           | 3                    | 43.5                       | 150                      |
| 216 – 960          | 3                    | 46.0                       | 200                      |
| Above 960          | 3                    | 54.0                       | 500                      |

#### 3.3. Test Procedures - Same as clause 4.3.

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

##### 3.3.1. Test Procedures for Radiated Spurious Emissions- Same as clause 2.3.1.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3.4. Test Results

Ambient temperature : ( 23 ± 2) °C  
Relative humidity : 47 % R.H.

#### 3.4.1. Spurious Radiated Emission

The frequency spectrum from 30 MHz to 1000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

| Radiated Emissions |                      |             | Ant  | Correction Factors |               | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 537.27             | 43.50                | Peak        | V    | 17.83              | -25.78        | 35.55                 | 46.00                | 10.45       |
| Above 600.00       | Not detected         | -           | -    | -                  | -             | -                     | -                    | -           |

#### Remark

1. To get a maximum emission level from the EUT, the EUT was moved throughout the X, Y and Z planes.(Worst case is x-plane)
2. All spurious emission at channels are almost the same below 1 GHz, so that the channel was chosen at representative in final test.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 4. 99 % Bandwidth

### 4.1. Test Setup



### 4.2. Limit

Limit: Not Applicable

### 4.3. Test Procedure

1. The 20 dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 30 kHz, VBW = 100 kHz, Span = 10 MHz.


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 4.4. Test Results

Ambient temperature : (23 ± 2) °C  
Relative humidity : 47 % R.H.


| Operation Mode | Channel | Channel Frequency (MHz) | 99 % Bandwidth (MHz) |
|----------------|---------|-------------------------|----------------------|
| GFSK           | Low     | 2 402                   | 2.07                 |
|                | Middle  | 2 432                   | 2.11                 |
|                | High    | 2 472                   | 2.24                 |

#### Low Channel

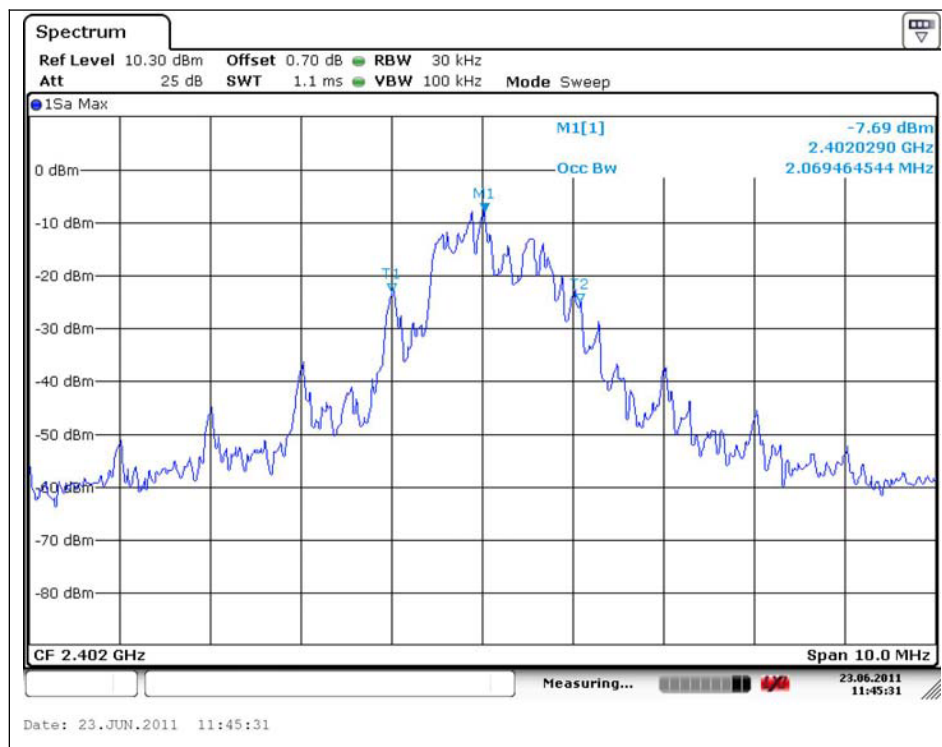


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

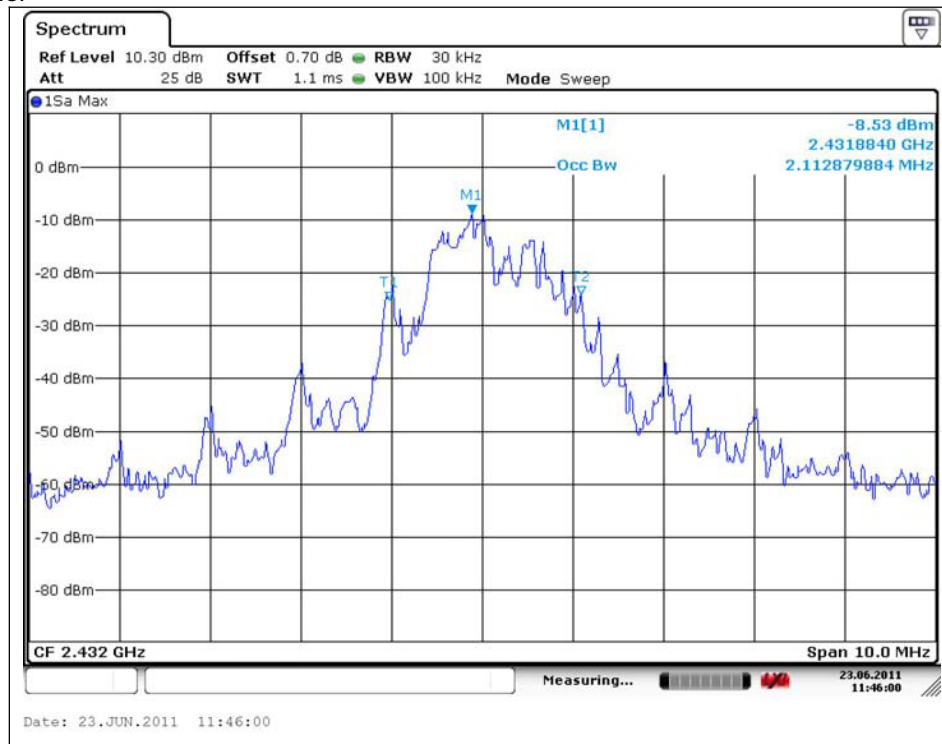

## High Channel

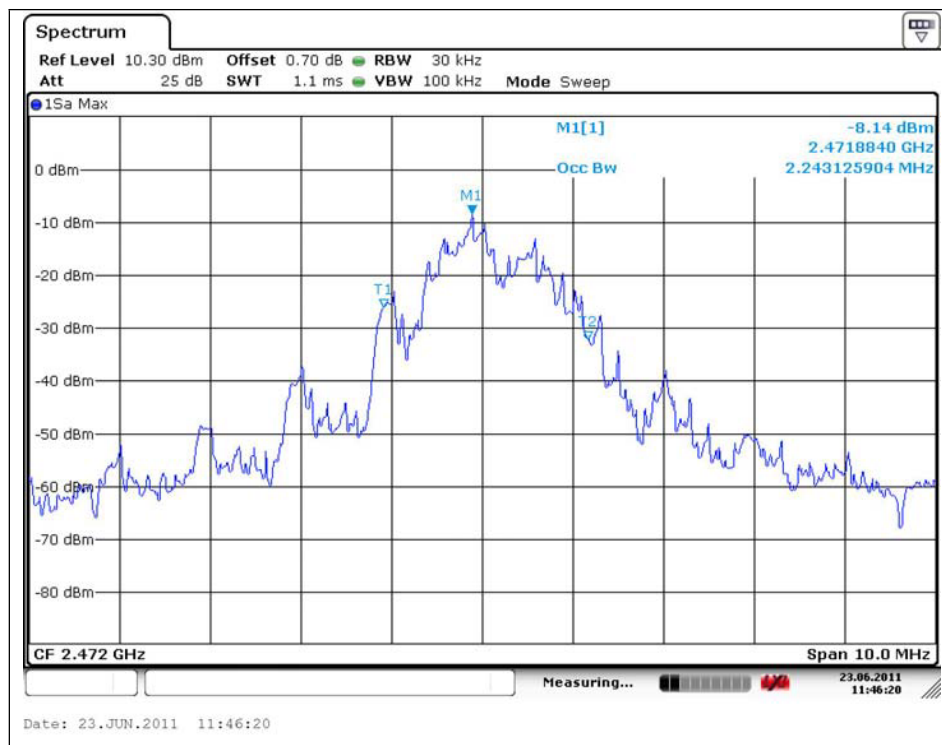

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 5. RF Exposure Evaluation

### 5.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b)

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency Range (MHz)                                 | Electric Field Strength(V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Average Time     |
|-------------------------------------------------------|------------------------------|-------------------------------|-------------------------------------|------------------|
| (A) Limits for Occupational /Control Exposures        |                              |                               |                                     |                  |
| 300 – 1 500                                           | --                           | --                            | F/300                               | 6                |
| 1 500 – 100 000                                       | --                           | --                            | 5                                   | 6                |
| (B) Limits for General Population/Uncontrol Exposures |                              |                               |                                     |                  |
| 300 – 1 500                                           | --                           | --                            | F/1500                              | 6                |
| <b><u>1 500 – 100 000</u></b>                         | --                           | --                            | <b><u>1</u></b>                     | <b><u>30</u></b> |

#### 5.1.1. Friis transmission formula: $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where  $P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

### 5.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

### 5.1.3. Output Power into Antenna & RF Exposure Evaluation Distance

| Channel | Channel Frequency (MHz) | Output Average Power to Antenna (dB m) | Antenna Gain (dB i) | Power Density at 20 cm (mW/cm <sup>2</sup> ) | LIMITS (mW/cm <sup>2</sup> ) |
|---------|-------------------------|----------------------------------------|---------------------|----------------------------------------------|------------------------------|
| Low     | 2 402                   | -5.86                                  | -9.90               | 0.000 005                                    | 1                            |
| Middle  | 2 432                   | -6.67                                  | -9.90               | 0.000 004                                    | 1                            |
| High    | 2 472                   | -8.28                                  | -9.90               | 0.000 003                                    | 1                            |

Note :

1. The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup>.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*