

# TEST REPORT

FCC BT LE Test for SM-A176U  
Certification

APPLICANT  
SAMSUNG Electronics Co., Ltd.

REPORT NO.  
HCT-RF-2510-FC036

DATE OF ISSUE  
October 24, 2025

Tested by  
Sang Hoon Lee



Technical Manager  
Jong Seok Lee



**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

REPORT NO.  
HCT-RF-2510-FC036

DATE OF ISSUE  
October 24, 2025

Applicant

**SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name  
Model Name

Mobile Phone  
SM-A176U

FCC ID

A3LSMA176U

Date of Test

September 03, 2025 ~ October 24, 2025

FCC Classification

Digital Transmission System(DTS)

Test Standard Used

FCC Rule Part(s): Part 15.247

Test Results

PASS

Location of Test

☒ Permanent Testing Lab    ☐ On Site Testing Lab  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue    | Description     |
|--------------|------------------|-----------------|
| 0            | October 24, 2025 | Initial Release |

## Notice

---

### Content

---

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

|                                             |    |
|---------------------------------------------|----|
| 1. EUT DESCRIPTION                          | 5  |
| ANTENNA CONFIGURATIONS                      | 6  |
| 2. TEST METHODOLOGY                         | 7  |
| EUT CONFIGURATION                           | 7  |
| EUT EXERCISE                                | 7  |
| GENERAL TEST PROCEDURES                     | 7  |
| DESCRIPTION OF TEST MODES                   | 8  |
| 3. INSTRUMENT CALIBRATION                   | 8  |
| 4. FACILITIES AND ACCREDITATIONS            | 8  |
| FACILITIES                                  | 8  |
| EQUIPMENT                                   | 8  |
| 5. ANTENNA REQUIREMENTS                     | 9  |
| 6. MEASUREMENT UNCERTAINTY                  | 9  |
| 7. DESCRIPTION OF TESTS                     | 10 |
| 8. SUMMARY TEST OF RESULTS                  | 27 |
| 9. TEST RESULT                              | 28 |
| 9.1 DUTY CYCLE                              | 28 |
| 9.2 6 dB BANDWIDTH                          | 31 |
| 9.3 OUTPUT POWER                            | 33 |
| 9.4 POWER SPECTRAL DENSITY                  | 35 |
| 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS | 37 |
| 9.6 RADIATED SPURIOUS EMISSIONS             | 39 |
| 9.7 RADIATED RESTRICTED BAND EDGES          | 45 |
| 9.8 POWERLINE CONDUCTED EMISSIONS           | 47 |
| 10. LIST OF TEST EQUIPMENT                  | 48 |
| 11. ANNEX A_ TEST SETUP PHOTO               | 50 |

## 1. EUT DESCRIPTION

|                               |                                                                                            |                                                                                                                                                |
|-------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                         | SM-A176U                                                                                   |                                                                                                                                                |
| Additional Model              | SM-A176U1, SM-S176V                                                                        |                                                                                                                                                |
| EUT Type                      | Mobile Phone                                                                               |                                                                                                                                                |
| Power Supply                  | DC 3.88 V                                                                                  |                                                                                                                                                |
| Frequency Range               | 125k, 500k, 1M Bit/s : 2402 - 2480 MHz<br>2M Bit/s : 2404 - 2478 MHz (Except for 2426 MHz) |                                                                                                                                                |
| Number of Channels            | 125k, 500k, 1M Bit/s : 40 Channels<br>2M Bit/s : 37 Channels                               |                                                                                                                                                |
| Max. RF Output Power (Normal) | Peak                                                                                       | 1 M Bit/s: 12.80 dBm (19.06 mW)<br>2 M Bit/s: 13.40 dBm (21.85 mW)<br>125 k Bit/s : 12.52 dBm (17.87 mW)<br>500 k Bit/s : 12.76 dBm (18.89 mW) |
|                               | Average                                                                                    | 1 M Bit/s: 12.39 dBm (17.34 mW)<br>2 M Bit/s: 12.81 dBm (19.09 mW)<br>125 k Bit/s : 12.24 dBm (16.73 mW)<br>500 k Bit/s : 12.38 dBm (17.32 mW) |
| Modulation Type               | GFSK                                                                                       |                                                                                                                                                |
| Bluetooth Version             | 5.3                                                                                        |                                                                                                                                                |
| Antenna Specification         | Type: MFA<br>Peak Gain : -4.5 dBi                                                          |                                                                                                                                                |
| Serial number                 | Conducted : R3CY70RH0NW<br>Radiated : R3CY70RH1FJ                                          |                                                                                                                                                |

## ANTENNA CONFIGURATIONS

1. Below Tables are the possible configurations.

| Configurations | SISO |      | Dual BT     |
|----------------|------|------|-------------|
|                | Ant1 | Ant2 | Ant1 & Ant2 |
| Bluetooth      | O    | X    | X           |

### Note:

- 1) O = Support, X = Not Support
- 2) SISO = Single Input Single Output

This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz bands simultaneously on each antenna.

| Simultaneous transmission Scenario | 5 GHz WiFi<br>Ant.1 | BT<br>Ant.1 | Test<br>Case |
|------------------------------------|---------------------|-------------|--------------|
| Bluetooth + 5 GHz WiFi             | on                  | on          | Scenario1    |

## 2. TEST METHODOLOGY

Unlicensed wireless device were tested using the following measurement procedure.

[1] KDB 558074 D01 15.247 Meas Guidance v05r02

[2] ANSI C63.10-2020

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

According to the requirements in Section 6.3 ~ Section 6.6 of ANSI C63.10-2020

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes.

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to ANSI/USEMCSC C63.2-2023, "American National Standard for Specifications of Electromagnetic Interference and Field Strength Measuring Instrumentation in the Frequency Range 9 kHz to 40 GHz".

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

| Parameter           | Expanded Uncertainty ( $\pm$ kHz)        |
|---------------------|------------------------------------------|
| X dB, 99% Bandwidth | 95 (Confidence level about 95 %, $k=2$ ) |
| Frequency stability | 28 (Confidence level about 95 %, $k=2$ ) |


| Parameter                                | Expanded Uncertainty ( $\pm$ dB)           |
|------------------------------------------|--------------------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.54 (Confidence level about 95 %, $k=2$ ) |
| Conducted Output Power(Power Meter)      | 0.54 (Confidence level about 95 %, $k=2$ ) |
| Conducted Output Power(Signal Analyzer)  | 0.68 (Confidence level about 95 %, $k=2$ ) |
| Power Spectral Density                   | 1.03 (Confidence level about 95 %, $k=2$ ) |
| Band Edge (Out of Band Emissions)        | 0.70 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.36 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.68 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.75 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.82 (Confidence level about 95 %, $k=2$ ) |

## 7. DESCRIPTION OF TESTS

| Test Item                                                                 | Test Procedure                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Duty Cycle                                                                | - ANSI C63.10-2020 – Section 11.6                                                                                                                                                                                                        |
| 6 dB Bandwidth                                                            | - ANSI C63.10-2020 – Section 11.8                                                                                                                                                                                                        |
| Output Power                                                              | - ANSI C63.10-2020 – Section 11.9.1.2(Peak) & 11.9.2.3(Avg)                                                                                                                                                                              |
| Power Spectral Density                                                    | - ANSI C63.10-2020 – Section 11.10                                                                                                                                                                                                       |
| Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions | - ANSI C63.10-2020 – Section 11.11                                                                                                                                                                                                       |
| Radiated Test                                                             | - ANSI C63.10-2020 – Section 6.4 (Below 30 MHz)<br>- ANSI C63.10-2020 – Section 6.5 (30 MHz to 1000 MHz)<br>- ANSI C63.10-2020 – Section 6.6 (1 GHz to 40 GHz)<br>- ANSI C63.10-2020 – Section 6.10 & 11.12 (Restricted frequency bands) |
| AC Power line Conducted Emissions                                         | - ANSI C63.10-2020 – Section 6.2                                                                                                                                                                                                         |

## 7.1. Duty Cycle

### Test Configuration

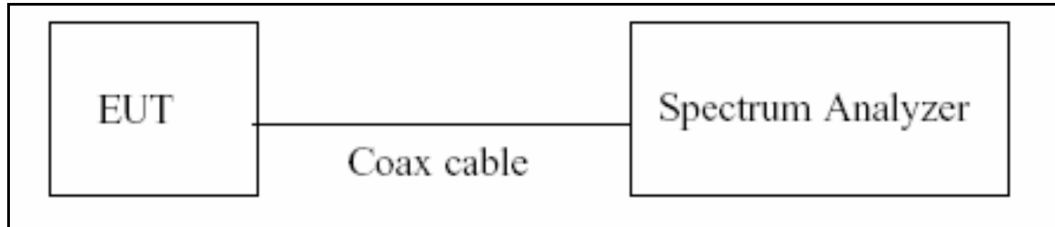

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

The Spectrum Analyzer is set to


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{\text{total}}$  and  $T_{\text{on}}$
8. Calculate Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6 dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

- 1) RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = No faster than coupled (auto) time.
- 6) Allow the trace to stabilize.
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set to 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power  
: Measure the peak power of the transmitter.
- Average Power
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

##### Test Configuration



##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple.
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) If then duty cycle factor shall be added to adjust the result if the duty cycle is less than 98 %

##### Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = No faster than coupled (auto) time.
- 7) Allow trace to fully stabilize.
- 8) Use peak marker function to determine the maximum PSD level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

### Factors for frequency

| Freq(MHz) | Factor(dB) |
|-----------|------------|
| 30        | 20.19      |
| 100       | 20.18      |
| 200       | 20.14      |
| 300       | 20.27      |
| 400       | 20.48      |
| 500       | 20.31      |
| 600       | 20.32      |
| 700       | 20.40      |
| 800       | 20.40      |
| 900       | 20.38      |
| 1000      | 20.46      |
| 2000      | 20.77      |
| 2400      | 20.86      |
| 3000      | 20.91      |
| 4000      | 21.01      |
| 5000      | 21.05      |
| 5850      | 21.11      |
| 6000      | 21.74      |
| 7000      | 21.90      |
| 8000      | 21.55      |
| 9000      | 22.77      |
| 10000     | 21.71      |
| 11000     | 21.38      |
| 12000     | 21.79      |
| 13000     | 21.54      |
| 14000     | 21.98      |
| 15000     | 22.42      |
| 16000     | 22.18      |
| 17000     | 22.72      |
| 18000     | 22.48      |
| 19000     | 22.56      |
| 20000     | 22.62      |
| 21000     | 23.01      |
| 22000     | 22.88      |
| 23000     | 22.84      |
| 24000     | 22.99      |
| 25000     | 22.79      |
| 26000     | 22.98      |

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


## 7.6. Radiated Test

### Limit


| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 – 0.490   | $2400/F(\text{kHz})$               | 300                      |
| 0.490 – 1.705   | $24000/F(\text{kHz})$              | 30                       |
| 1.705 – 30      | 30                                 | 30                       |
| 30-88           | 100                                | 3                        |
| 88-216          | 150                                | 3                        |
| 216-960         | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

### Test Configuration


Below 30 MHz

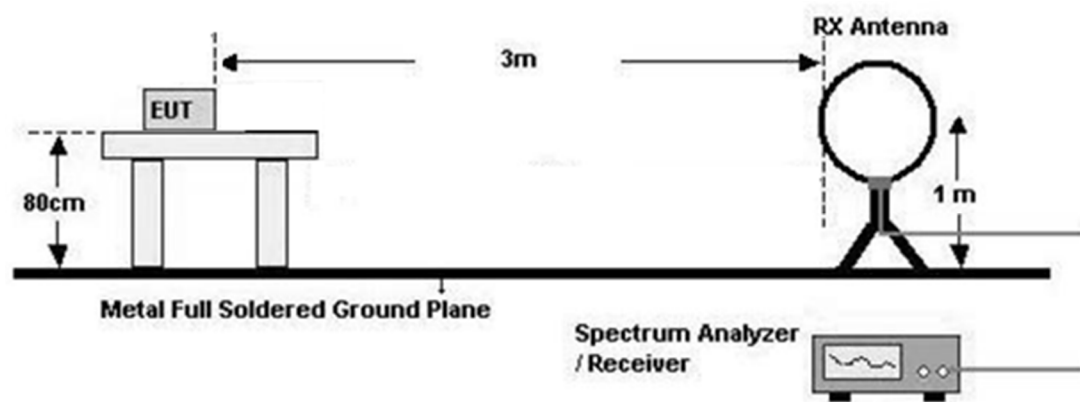

30 MHz - 1 GHz

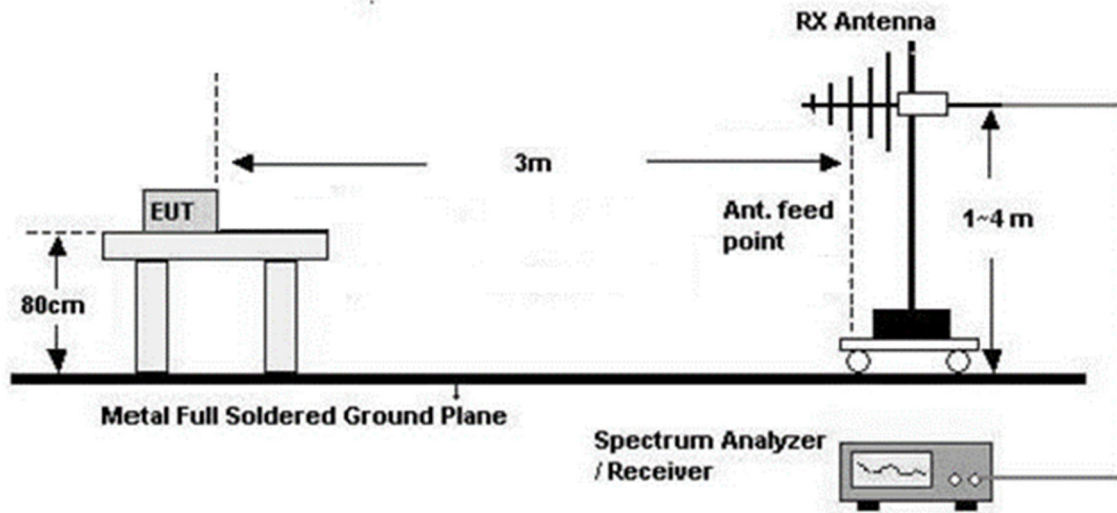

Above 1 GHz

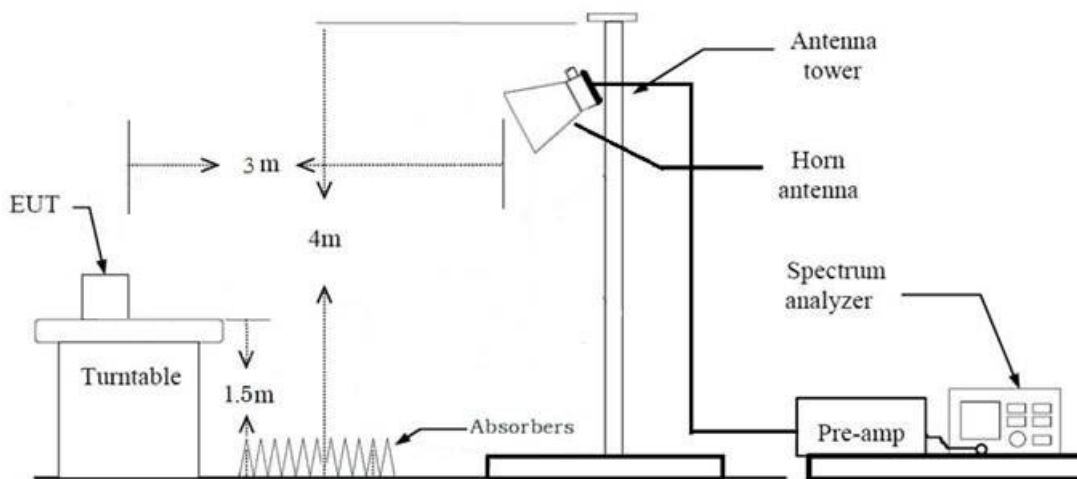

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Analyzer Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

**6. Spectrum Analyzer Setting****(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

**(2) Measurement Type(Quasi-peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Analyzer Setting

#### (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

#### (2) Measurement Type(Average):

- Duty cycle  $< 98 \%$ , duty cycle variations are less than  $\pm 2 \%$
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to Duty cycle test result.

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

10. Total (Measurement Type : Peak)

$$\begin{aligned} &= \text{Peak Measured Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} \\ &\quad + \text{Distance Factor(D.F)} \end{aligned}$$

Total (Measurement Type : Average)

$$= \text{Average Measured Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)}$$

+ Distance Factor(D.F)

#Note : Used Average measurement method according to KDB 558074 Section11 Q3

#### Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Analyzer Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98 %, duty cycle variations are less than  $\pm 2$  %
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to Duty cycle test result
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
9. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
10. Total (Measurement Type : Peak)
  - = Peak Measured Value
  - Total(Measurement Type : Average, Duty cycle  $\geq 98$  %)

= Average Measured Value

- We apply to the offset in the range 1 GHz - 18 GHz.
- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

#Note : Used Average measurement method according to KDB 558074 Section11 Q3

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V)     |                         |
|-----------------------|-------------------------|-------------------------|
|                       | Quasi-peak              | Average                 |
| 0.15 to 0.50          | 66 to 56 <sup>(a)</sup> | 56 to 46 <sup>(a)</sup> |
| 0.50 to 5             | 56                      | 46                      |
| 5 to 30               | 60                      | 50                      |

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 0.8 m above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

## 7.8. Worst case configuration and mode

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.  
(Worst case : 1M Bit/s 37 Byte)  
(125k, 500k, 1M Bit/s all have the same 1 MHz Bandwidth and only Worst case result is attached.)
4. All data rate of operation were investigated and the worst case configuration results are reported.
  - Worst case : 1 M, 2 M
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-A176U, Additional Models were tested and the worst case results are reported.  
(Worst case: SM-A176U)

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone+ External accessories + Travel Adapter  
Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter
2. SM-A176U, Additional Models were tested and the worst case results are reported.  
(Worst case: SM-A176U)

### Conducted test

1. The EUT was configured with packet length of highest power.
  - ALL supported mode tested.
  - Worst case results refer to Notes for each test item.
2. SM-A176U, Additional Models were tested and the worst case results are reported.  
(Worst case: SM-A176U)

### Radiated test(Simultaneous transmission Scenario)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : X

3. All of Simultaneous transmission Scenario were investigated and the worst case configuration results are reported. (Bluetooth Worst case : BTLE)

| Simultaneous transmission Scenario | 5 GHz WiFi<br>Ant.1 | BT<br>Ant.1 | Test<br>Case |
|------------------------------------|---------------------|-------------|--------------|
| Bluetooth + 5 GHz WiFi             | on                  | on          | Scenario1    |

4. The Simultaneous transmission Scenario mode test investigated both intermodulation and radiated spurious emissions.

- Worst result : Radiated spurious emissions
- Intermodulation : No signals are generated.
- Radiated spurious emissions : cf. Section 9.6

5. The following tables show the worst cases configurations determined during testing.

(Worst case : The lowest margin condition the channels and modes were selected for test.)

| Scenario 1             | Description | Bluetooth Emission | 5 GHz Emission |
|------------------------|-------------|--------------------|----------------|
| Bluetooth + 5 GHz WiFi | Antenna     | ANT 1              | ANT 1          |
|                        | Channel     | 37                 | 36             |
|                        | Data Rate   | 1 Mbps             | 6 Mbps         |
|                        | Mode        | BTLE 1M 37 Bytes   | 802.11a        |

Note : 5 GHz Simultaneous transmission Data refer to [UNII] Test Report

6. SM-A176U, Additional Models were tested and the worst case results are reported.

(Worst case: SM-A176U)

## 8. SUMMARY TEST OF RESULTS

| Test Item                            | FCC Part Section(s)               | Test Limit           | Test Condition | Test Result |
|--------------------------------------|-----------------------------------|----------------------|----------------|-------------|
| 6 dB Bandwidth                       | § 15.247(a)(2)                    | > 500 kHz            | Conducted      | PASS        |
| Conducted Maximum Output Power       | § 15.247(b)(3)                    | < 1 Watt             |                | PASS        |
| Power Spectral Density               | § 15.247(e)                       | < 8 dBm / 3 kHz Band |                | PASS        |
| Band Edge<br>(Out of Band Emissions) | § 15.247(d)                       | Conducted > 30 dBc   |                | PASS        |
| AC Power line<br>Conducted Emissions | § 15.207                          | cf. Section 7.7      |                | PASS        |
| Radiated Spurious Emissions          | § 15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      | Radiated       | PASS        |
| Radiated Restricted Band Edge        | § 15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      |                | PASS        |

Note: The decision rule applies 'simple acceptance'



## 9. TEST RESULT

### 9.1 DUTY CYCLE

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | T <sub>on</sub><br>(ms) | T <sub>total</sub><br>(ms) | Duty Cycle | Duty Cycle Factor<br>(dB) |
|----------------------|-------------------------|-------------------------|----------------------------|------------|---------------------------|
| 1M                   | 37                      | 0.388                   | 0.624                      | 0.621      | 2.071                     |
|                      | 255                     | 2.130                   | 2.500                      | 0.852      | 0.696                     |
| 2M                   | 37                      | 0.203                   | 0.624                      | 0.325      | 4.887                     |
|                      | 255                     | 1.072                   | 1.872                      | 0.573      | 2.421                     |
| 125k                 | 37                      | 3.100                   | 3.750                      | 0.827      | 0.827                     |
|                      | 255                     | 17.033                  | 17.500                     | 0.973      | 0.117                     |
| 500k                 | 37                      | 1.068                   | 1.876                      | 0.569      | 2.447                     |
|                      | 255                     | 4.560                   | 5.000                      | 0.912      | 0.400                     |



1 M Bit/s (37 Byte)

1 M Bit/s (255 Byte)

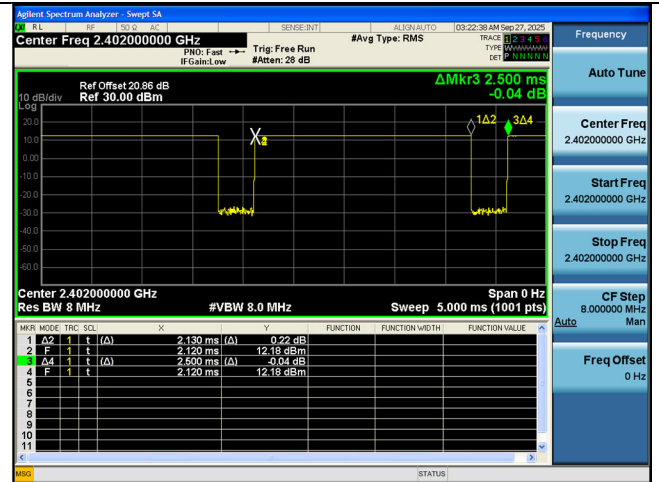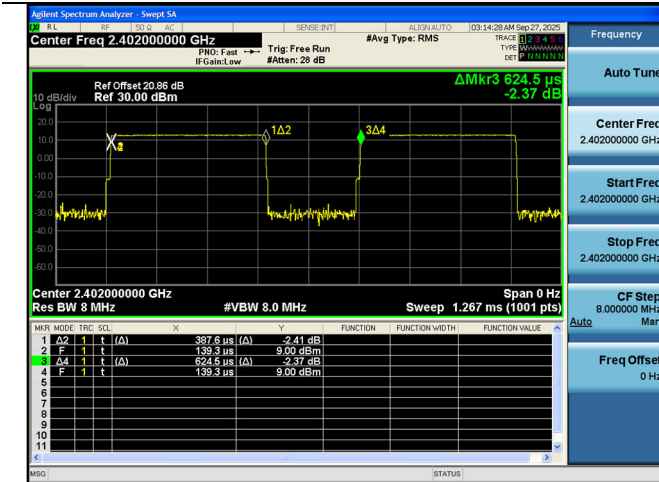



2 M Bit/s (37 Byte)

2 M Bit/s (255 Byte)

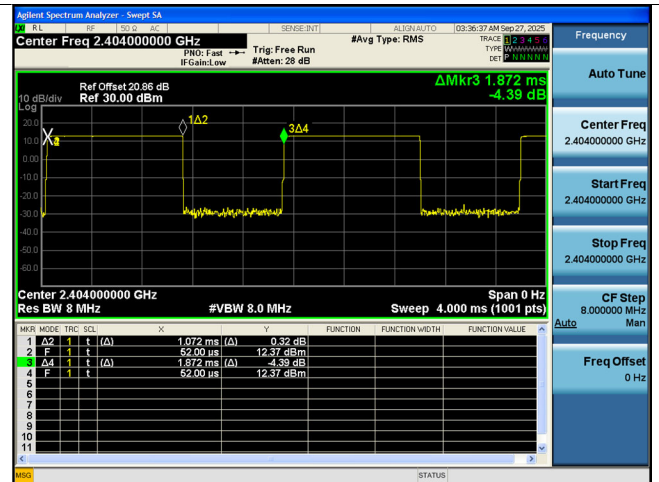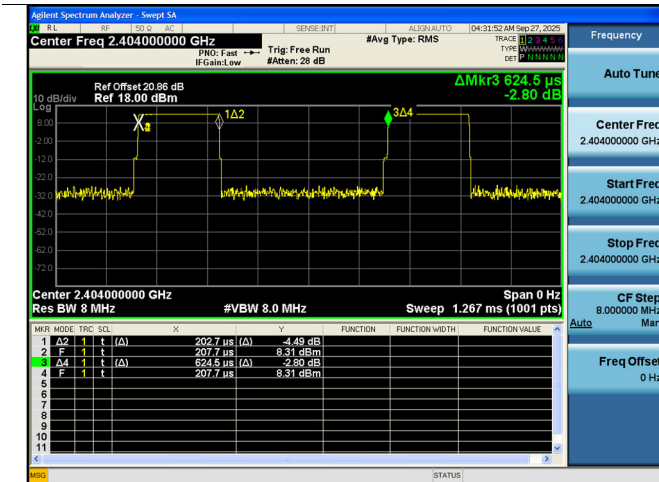



125 k Bit/s (37 Byte)

125 k Bit/s (255 Byte)

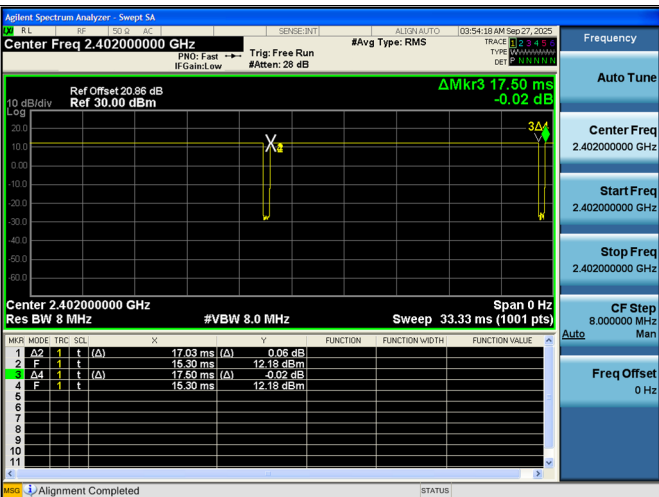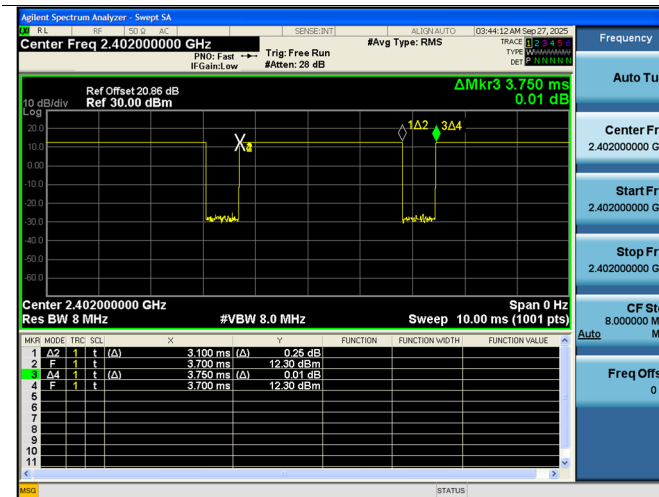

## 500 k Bit/s (37 Byte)

## 500 k Bit/s (255 Byte)

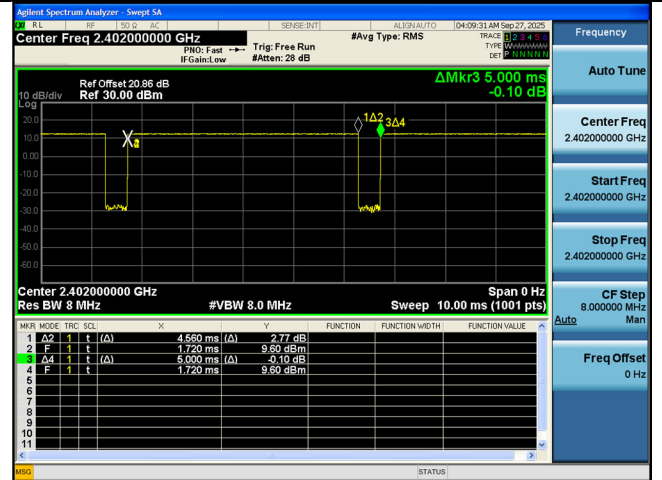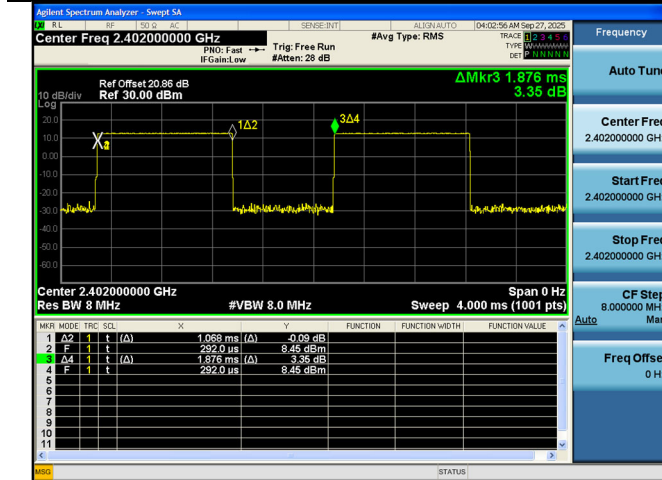


## 9.2 6 dB BANDWIDTH

| Mode         | Channel | Frequency<br>[MHz] | 6dB BW<br>[kHz] | Limit<br>[kHz] |
|--------------|---------|--------------------|-----------------|----------------|
| 1M 37Byte    | 37      | 2402               | 692.8           | > 500          |
|              | 17      | 2440               | 703.6           |                |
|              | 39      | 2480               | 713.1           |                |
| 1M 255Byte   | 37      | 2402               | 681.1           |                |
|              | 17      | 2440               | 674.2           |                |
|              | 39      | 2480               | 675.4           |                |
| 2M 37Byte    | 0       | 2404               | 1231            |                |
|              | 17      | 2440               | 1231            |                |
|              | 36      | 2478               | 1218            |                |
| 2M 255Byte   | 0       | 2404               | 1241            |                |
|              | 17      | 2440               | 1167            |                |
|              | 36      | 2478               | 1237            |                |
| 125k 37Byte  | 37      | 2402               | 656.3           |                |
|              | 17      | 2440               | 652.4           |                |
|              | 39      | 2480               | 666.4           |                |
| 125k 255Byte | 37      | 2402               | 644.8           |                |
|              | 17      | 2440               | 644.9           |                |
|              | 39      | 2480               | 650.9           |                |
| 500k 37Byte  | 37      | 2402               | 672.0           |                |
|              | 17      | 2440               | 668.5           |                |
|              | 39      | 2480               | 668.3           |                |
| 500k 255Byte | 37      | 2402               | 668.2           |                |
|              | 17      | 2440               | 672.9           |                |
|              | 39      | 2480               | 667.9           |                |

## Test Plots

**Note:** In order to simplify the report, attached plots were only the narrowest 6 dB BW channel (125k, 500k, 1M Bit/s all have the same 1 MHz Bandwidth and only Worst result is attached.)


1M Bit/s 255 Byte (Mid-CH 17)

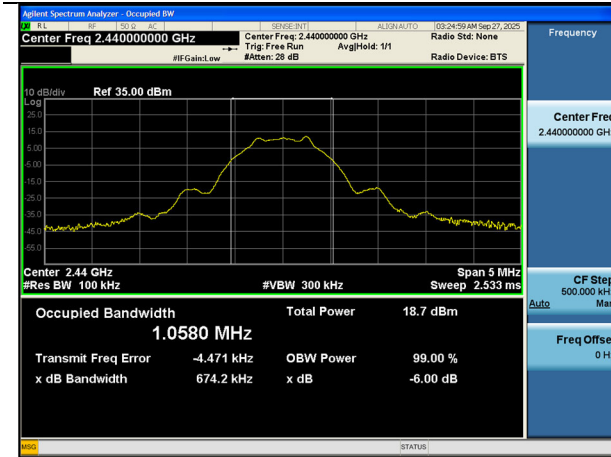


2M Bit/s 255 Byte (Mid-CH 17)



125k Bit/s 255 Byte (Low-CH 37)

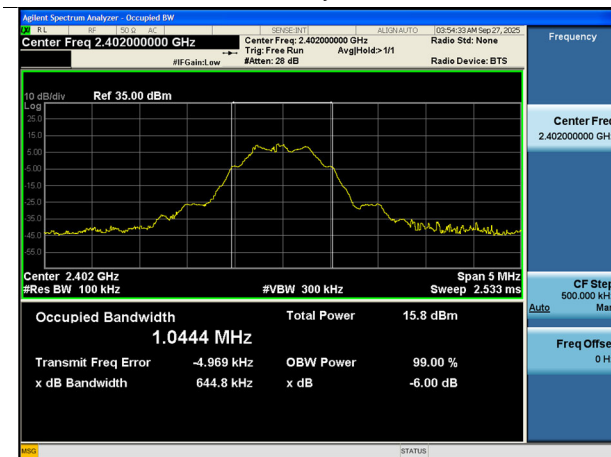

500k Bit/s 255 Byte (High-CH 39)

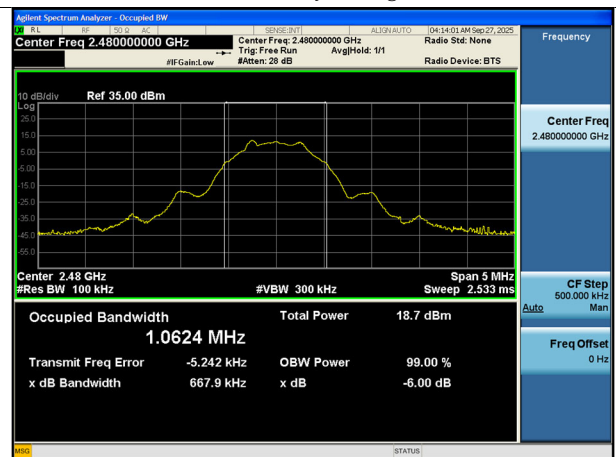

### 9.3 OUTPUT POWER

#### Peak Power

| Mode         | Channel | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] |
|--------------|---------|-----------------|------------------|-------------|
| 1M 37Byte    | 37      | 2402            | 12.69            | 30          |
|              | 17      | 2440            | 12.48            |             |
|              | 39      | 2480            | 12.80            |             |
| 1M 255Byte   | 37      | 2402            | 12.49            |             |
|              | 17      | 2440            | 12.17            |             |
|              | 39      | 2480            | 12.42            |             |
| 2M 37Byte    | 0       | 2404            | 12.90            |             |
|              | 17      | 2440            | 12.74            |             |
|              | 36      | 2478            | 13.40            |             |
| 2M 255Byte   | 0       | 2404            | 12.77            |             |
|              | 17      | 2440            | 12.51            |             |
|              | 36      | 2478            | 12.99            |             |
| 125k 37Byte  | 37      | 2402            | 12.52            |             |
|              | 17      | 2440            | 12.22            |             |
|              | 39      | 2480            | 12.34            |             |
| 125k 255Byte | 37      | 2402            | 12.36            |             |
|              | 17      | 2440            | 11.96            |             |
|              | 39      | 2480            | 12.29            |             |
| 500k 37Byte  | 37      | 2402            | 12.56            |             |
|              | 17      | 2440            | 12.48            |             |
|              | 39      | 2480            | 12.76            |             |
| 500k 255Byte | 37      | 2402            | 12.49            |             |
|              | 17      | 2440            | 12.03            |             |
|              | 39      | 2480            | 12.39            |             |

## Average Power

### Note :

Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

| Mode         | Channel | Frequency [MHz] | Measured Power [dBm] | D.C.F [dB] | Total Power [dBm] | Limit [dBm] |
|--------------|---------|-----------------|----------------------|------------|-------------------|-------------|
| 1M 37Byte    | 37      | 2402            | 10.32                | 2.07       | 12.39             | 30          |
|              | 17      | 2440            | 9.98                 | 2.07       | 12.05             |             |
|              | 39      | 2480            | 10.31                | 2.07       | 12.38             |             |
| 1M 255Byte   | 37      | 2402            | 11.43                | 0.70       | 12.13             |             |
|              | 17      | 2440            | 11.09                | 0.70       | 11.78             |             |
|              | 39      | 2480            | 11.36                | 0.70       | 12.05             |             |
| 2M 37Byte    | 0       | 2404            | 7.78                 | 4.89       | 12.66             |             |
|              | 17      | 2440            | 7.50                 | 4.89       | 12.39             |             |
|              | 36      | 2478            | 7.92                 | 4.89       | 12.81             |             |
| 2M 255Byte   | 0       | 2404            | 10.03                | 2.42       | 12.45             |             |
|              | 17      | 2440            | 9.83                 | 2.42       | 12.25             |             |
|              | 36      | 2478            | 10.13                | 2.42       | 12.55             |             |
| 125k 37Byte  | 37      | 2402            | 11.41                | 0.83       | 12.24             |             |
|              | 17      | 2440            | 11.01                | 0.83       | 11.83             |             |
|              | 39      | 2480            | 11.01                | 0.83       | 11.84             |             |
| 125k 255Byte | 37      | 2402            | 11.85                | 0.12       | 11.97             |             |
|              | 17      | 2440            | 11.42                | 0.12       | 11.54             |             |
|              | 39      | 2480            | 11.72                | 0.12       | 11.84             |             |
| 500k 37Byte  | 37      | 2402            | 9.94                 | 2.45       | 12.38             |             |
|              | 17      | 2440            | 9.56                 | 2.45       | 12.00             |             |
|              | 39      | 2480            | 9.94                 | 2.45       | 12.38             |             |
| 500k 255Byte | 37      | 2402            | 11.57                | 0.40       | 11.97             |             |
|              | 17      | 2440            | 11.22                | 0.40       | 11.62             |             |
|              | 39      | 2480            | 11.38                | 0.40       | 11.78             |             |

#### 9.4 POWER SPECTRAL DENSITY

**Note :**


Total PSD [dBm] = Measured PSD [dBm] + Duty Cycle Factor [dB]

| Mode         | Channel | Frequency [MHz] | Measured PSD [dBm] | D.C.F [dB] | Total PSD [dBm] | Limit [dBm/3kHz] |
|--------------|---------|-----------------|--------------------|------------|-----------------|------------------|
| 1M 37Byte    | 37      | 2402            | -0.124             | 2.07       | 1.947           | 8                |
|              | 17      | 2440            | -0.242             | 2.07       | 1.829           |                  |
|              | 39      | 2480            | -0.509             | 2.07       | 1.562           |                  |
| 1M 255Byte   | 37      | 2402            | 0.384              | 0.70       | 1.080           |                  |
|              | 17      | 2440            | 0.240              | 0.70       | 0.936           |                  |
|              | 39      | 2480            | 0.246              | 0.70       | 0.942           |                  |
| 2M 37Byte    | 0       | 2404            | -4.350             | 4.89       | 0.537           |                  |
|              | 17      | 2440            | -4.476             | 4.89       | 0.411           |                  |
|              | 36      | 2478            | -4.369             | 4.89       | 0.518           |                  |
| 2M 255Byte   | 0       | 2404            | -4.042             | 2.42       | -1.621          |                  |
|              | 17      | 2440            | -3.804             | 2.42       | -1.383          |                  |
|              | 36      | 2478            | -3.436             | 2.42       | -1.015          |                  |
| 125k 37Byte  | 37      | 2402            | 5.209              | 0.83       | 6.036           |                  |
|              | 17      | 2440            | 4.548              | 0.83       | 5.375           |                  |
|              | 39      | 2480            | 4.855              | 0.83       | 5.682           |                  |
| 125k 255Byte | 37      | 2402            | 5.495              | 0.12       | 5.612           |                  |
|              | 17      | 2440            | 4.999              | 0.12       | 5.116           |                  |
|              | 39      | 2480            | 5.154              | 0.12       | 5.271           |                  |
| 500k 37Byte  | 37      | 2402            | 0.551              | 2.45       | 2.998           |                  |
|              | 17      | 2440            | 0.591              | 2.45       | 3.038           |                  |
|              | 39      | 2480            | 0.641              | 2.45       | 3.088           |                  |
| 500k 255Byte | 37      | 2402            | 0.236              | 0.40       | 0.636           |                  |
|              | 17      | 2440            | 0.146              | 0.40       | 0.546           |                  |
|              | 39      | 2480            | 0.174              | 0.40       | 0.574           |                  |

## Test Plots

**Note:** In order to simplify the report, attached plots were only the worst case PSD channel.


1M Bit/s 37 Byte (Low-CH 37)

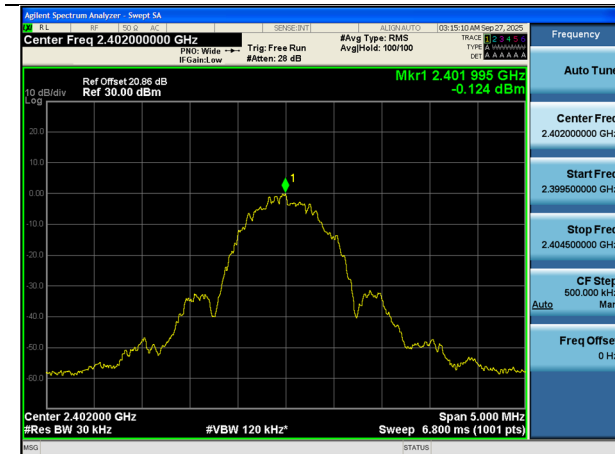

2M Bit/s 37 Byte (Low-CH 0)



125k Bit/s 37 Byte (Low-CH 37)

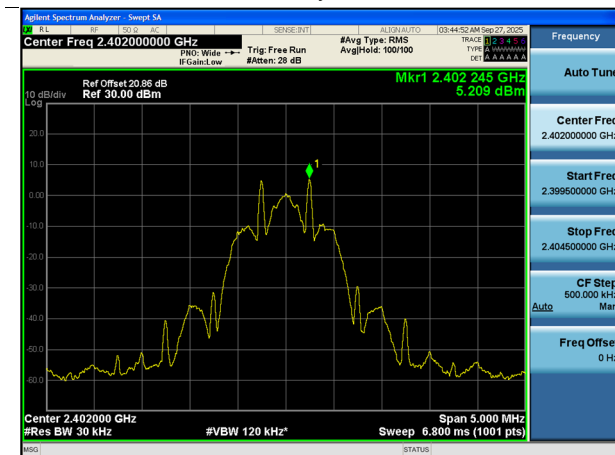

500k Bit/s 37 Byte (High-CH 39)




## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

### [BAND EDGE]

| Mode         | Channel | Frequency [MHz] | Position | Band Edge [dB] | Limit [dBc] |
|--------------|---------|-----------------|----------|----------------|-------------|
| 1M 37Byte    | 37      | 2402            | Lower    | 53.148         | 30          |
|              | 39      | 2480            | Upper    | 55.210         |             |
| 1M 255Byte   | 37      | 2402            | Lower    | 51.721         |             |
|              | 39      | 2480            | Upper    | 55.024         |             |
| 2M 37Byte    | 0       | 2404            | Lower    | 54.645         |             |
|              | 36      | 2478            | Upper    | 55.361         |             |
| 2M 255Byte   | 0       | 2404            | Lower    | 54.560         |             |
|              | 36      | 2478            | Upper    | 54.942         |             |
| 125k 37Byte  | 37      | 2402            | Lower    | 50.138         |             |
|              | 39      | 2480            | Upper    | 53.456         |             |
| 125k 255Byte | 37      | 2402            | Lower    | 50.341         |             |
|              | 39      | 2480            | Upper    | 52.256         |             |
| 500k 37Byte  | 37      | 2402            | Lower    | 52.001         |             |
|              | 39      | 2480            | Upper    | 56.000         |             |
| 500k 255Byte | 37      | 2402            | Lower    | 53.204         |             |
|              | 39      | 2480            | Upper    | 54.219         |             |

### ▣ Test Plot(Band Edge)

#### 125k Bit/s 37 Byte (Low-CH 37)

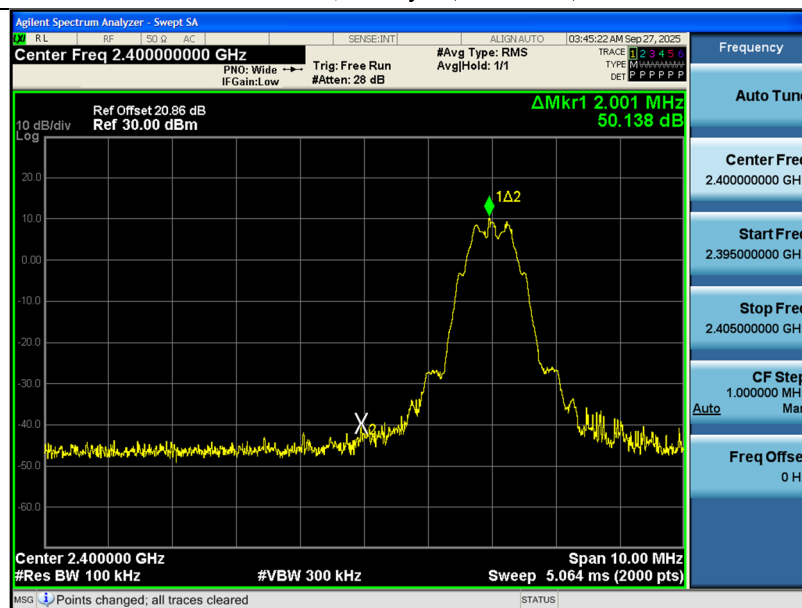


## [CONDUCTED SPURIOUS EMISSIONS]

In order to simplify the report, attached plots were only the worst case channel and data rate.

- Worst case: 125k 255Byte Ch. 37(2402 MHz)

### ▣ Test Plots (Conducted Spurious Emissions (30 MHz – 26.5 GHz))

#### Ant. 1 Conducted Spurious Emissions

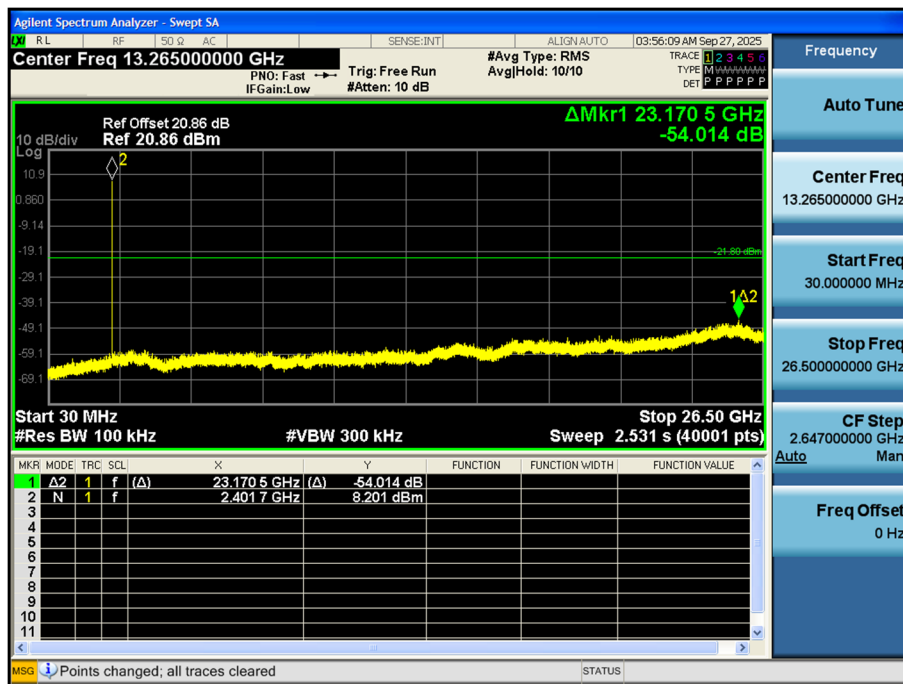

#### Note

1. Limit (dBm): -21.799

## 9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

| Frequency               | Measured Value | A.F+C.L+D.F | POL   | Total          | Limit          | Margin |
|-------------------------|----------------|-------------|-------|----------------|----------------|--------|
| [MHz]                   | [dB $\mu$ V]   | [dB/m]      | [H/V] | [dB $\mu$ V/m] | [dB $\mu$ V/m] | [dB]   |
| No Critical peaks found |                |             |       |                |                |        |

**Note:**

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = 40log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

| Frequency               | Measured Value | A.F+C.L | POL   | Total          | Limit          | Margin |
|-------------------------|----------------|---------|-------|----------------|----------------|--------|
| [MHz]                   | [dB $\mu$ V]   | [dB/m]  | [H/V] | [dB $\mu$ V/m] | [dB $\mu$ V/m] | [dB]   |
| No Critical peaks found |                |         |       |                |                |        |

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

| CH 37     | 2402           | MHz             | Mode :   |          | 1 M Bit/s (37 Bytes) |        |             |
|-----------|----------------|-----------------|----------|----------|----------------------|--------|-------------|
| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit                | Margin | Measurement |
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m]             | [dB]   | Type        |
| 4804      | 42.49          | 4.78            | V        | 47.27    | 73.98                | 26.71  | PK          |
| 4804      | 29.89          | 4.78            | V        | 34.67    | 53.98                | 19.31  | AV          |
| 7206      | 39.28          | 12.53           | V        | 51.81    | 73.98                | 22.17  | PK          |
| 7206      | 27.08          | 12.53           | V        | 39.61    | 53.98                | 14.37  | AV          |
| 4804      | 42.67          | 4.78            | H        | 47.45    | 73.98                | 26.53  | PK          |
| 4804      | 30.01          | 4.78            | H        | 34.79    | 53.98                | 19.19  | AV          |
| 7206      | 39.46          | 12.53           | H        | 51.99    | 73.98                | 21.99  | PK          |
| 7206      | 27.20          | 12.53           | H        | 39.73    | 53.98                | 14.25  | AV          |

| CH 17     | 2440           | MHz             | Mode :   |          | 1 M Bit/s (37 Bytes) |        |             |
|-----------|----------------|-----------------|----------|----------|----------------------|--------|-------------|
| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit                | Margin | Measurement |
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m]             | [dB]   | Type        |
| 4880      | 41.73          | 5.27            | V        | 47.00    | 73.98                | 26.98  | PK          |
| 4880      | 29.15          | 5.27            | V        | 34.42    | 53.98                | 19.56  | AV          |
| 7320      | 39.02          | 12.52           | V        | 51.54    | 73.98                | 22.44  | PK          |
| 7320      | 26.79          | 12.52           | V        | 39.31    | 53.98                | 14.67  | AV          |
| 4880      | 41.86          | 5.27            | H        | 47.13    | 73.98                | 26.85  | PK          |
| 4880      | 29.19          | 5.27            | H        | 34.46    | 53.98                | 19.52  | AV          |
| 7320      | 39.16          | 12.52           | H        | 51.68    | 73.98                | 22.30  | PK          |
| 7320      | 26.86          | 12.52           | H        | 39.38    | 53.98                | 14.60  | AV          |

| CH 39     | 2480           | MHz             | Mode :   |          | 1 M Bit/s (37 Bytes) |        |             |
|-----------|----------------|-----------------|----------|----------|----------------------|--------|-------------|
| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit                | Margin | Measurement |
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m]             | [dB]   | Type        |
| 4960      | 42.04          | 5.77            | V        | 47.81    | 73.98                | 26.17  | PK          |
| 4960      | 29.71          | 5.77            | V        | 35.48    | 53.98                | 18.50  | AV          |
| 7440      | 39.23          | 12.40           | V        | 51.63    | 73.98                | 22.35  | PK          |
| 7440      | 27.15          | 12.40           | V        | 39.55    | 53.98                | 14.43  | AV          |
| 4960      | 42.14          | 5.77            | H        | 47.91    | 73.98                | 26.07  | PK          |
| 4960      | 29.75          | 5.77            | H        | 35.52    | 53.98                | 18.46  | AV          |
| 7440      | 39.55          | 12.40           | H        | 51.95    | 73.98                | 22.03  | PK          |
| 7440      | 27.23          | 12.40           | H        | 39.63    | 53.98                | 14.35  | AV          |

| CH 0      | 2404           | MHz             | Mode :   |          | 2 M Bit/s (37 Bytes) |        |             |
|-----------|----------------|-----------------|----------|----------|----------------------|--------|-------------|
| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit                | Margin | Measurement |
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m]             | [dB]   | Type        |
| 4808      | 41.83          | 4.84            | V        | 46.67    | 73.98                | 27.31  | PK          |
| 4808      | 29.83          | 4.84            | V        | 34.67    | 53.98                | 19.31  | AV          |
| 7212      | 38.99          | 12.59           | V        | 51.58    | 73.98                | 22.40  | PK          |
| 7212      | 26.97          | 12.59           | V        | 39.56    | 53.98                | 14.42  | AV          |
| 4808      | 42.22          | 4.84            | H        | 47.06    | 73.98                | 26.92  | PK          |
| 4808      | 29.92          | 4.84            | H        | 34.76    | 53.98                | 19.22  | AV          |
| 7212      | 39.28          | 12.59           | H        | 51.87    | 73.98                | 22.11  | PK          |
| 7212      | 27.03          | 12.59           | H        | 39.62    | 53.98                | 14.36  | AV          |

| CH 17     | 2440           | MHz             | Mode :   |          | 2 M Bit/s (37 Bytes) |        |             |
|-----------|----------------|-----------------|----------|----------|----------------------|--------|-------------|
| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit                | Margin | Measurement |
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m]             | [dB]   | Type        |
| 4880      | 41.27          | 5.27            | V        | 46.54    | 73.98                | 27.44  | PK          |
| 4880      | 29.17          | 5.27            | V        | 34.44    | 53.98                | 19.54  | AV          |
| 7320      | 38.81          | 12.52           | V        | 51.33    | 73.98                | 22.65  | PK          |
| 7320      | 26.81          | 12.52           | V        | 39.33    | 53.98                | 14.65  | AV          |
| 4880      | 41.58          | 5.27            | H        | 46.85    | 73.98                | 27.13  | PK          |
| 4880      | 29.23          | 5.27            | H        | 34.50    | 53.98                | 19.48  | AV          |
| 7320      | 39.09          | 12.52           | H        | 51.61    | 73.98                | 22.37  | PK          |
| 7320      | 26.84          | 12.52           | H        | 39.36    | 53.98                | 14.62  | AV          |

| CH 36     | 2478           | MHz             | Mode :   |          | 2 M Bit/s (37 Bytes) |        |             |
|-----------|----------------|-----------------|----------|----------|----------------------|--------|-------------|
| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit                | Margin | Measurement |
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m]             | [dB]   | Type        |
| 4956      | 41.93          | 5.73            | V        | 47.66    | 73.98                | 26.32  | PK          |
| 4956      | 29.62          | 5.73            | V        | 35.35    | 53.98                | 18.63  | AV          |
| 7434      | 39.28          | 12.40           | V        | 51.68    | 73.98                | 22.30  | PK          |
| 7434      | 27.12          | 12.40           | V        | 39.52    | 53.98                | 14.46  | AV          |
| 4956      | 42.14          | 5.73            | H        | 47.87    | 73.98                | 26.11  | PK          |
| 4956      | 29.70          | 5.73            | H        | 35.43    | 53.98                | 18.55  | AV          |
| 7434      | 39.55          | 12.40           | H        | 51.95    | 73.98                | 22.03  | PK          |
| 7434      | 27.21          | 12.40           | H        | 39.61    | 53.98                | 14.37  | AV          |

[Simultaneous transmission Scenario]

Scenario 1


BT LE 1M 37 byte Ch.37 + UNII 802.11a 6 Mbps Ch.36

| Frequency | Measured value | A.F+C.L-A.G+D.F | ANT. POL | Total    | Limit    | Margin | Measurement |
|-----------|----------------|-----------------|----------|----------|----------|--------|-------------|
| [MHz]     | [dBμV]         | [dB/m]          | [H/V]    | [dBμV/m] | [dBμV/m] | [dB]   | Type        |
| 4804      | 42.85          | 4.78            | V        | 47.63    | 73.98    | 26.35  | PK          |
| 4804      | 31.33          | 4.78            | V        | 36.11    | 53.98    | 17.87  | AV          |
| 7206      | 39.32          | 12.53           | V        | 51.85    | 73.98    | 22.13  | PK          |
| 7206      | 26.93          | 12.53           | V        | 39.46    | 53.98    | 14.52  | AV          |
| 4804      | 43.13          | 4.78            | H        | 47.91    | 73.98    | 26.07  | PK          |
| 4804      | 31.48          | 4.78            | H        | 36.26    | 53.98    | 17.72  | AV          |
| 7206      | 39.48          | 12.53           | H        | 52.01    | 73.98    | 21.97  | PK          |
| 7206      | 27.04          | 12.53           | H        | 39.57    | 53.98    | 14.41  | AV          |


# Test Plots (Worst case : X-H)

Note: Plots of worst case are only reported.

Radiated Spurious Emissions plot – Average Result (1 M Bit/s 37 Bytes, Ch.37 3rd Harmonic, X-H)

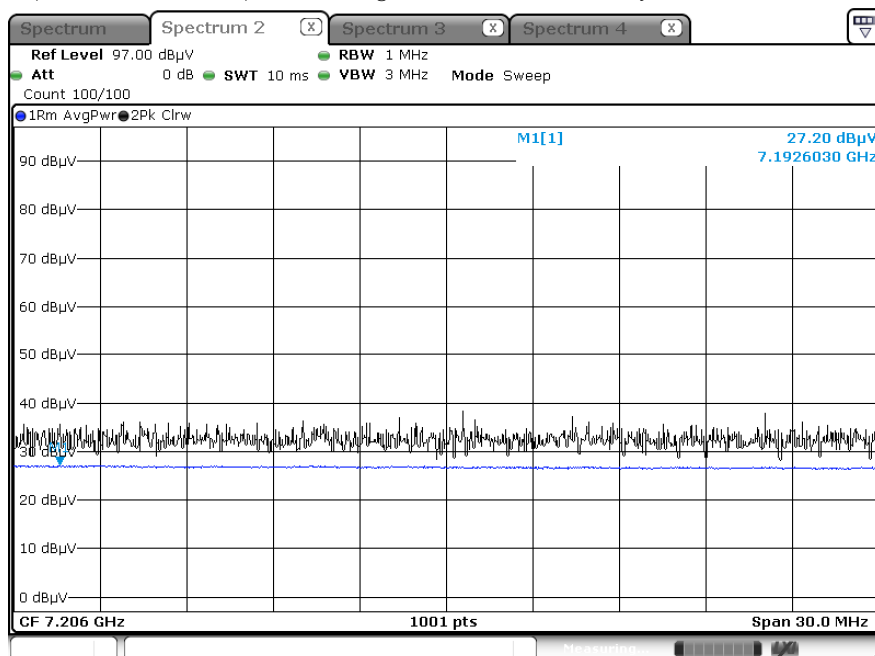

Radiated Spurious Emissions plot – Peak Result (1 M Bit/s 37 Bytes, Ch.37 3rd Harmonic, X-H)

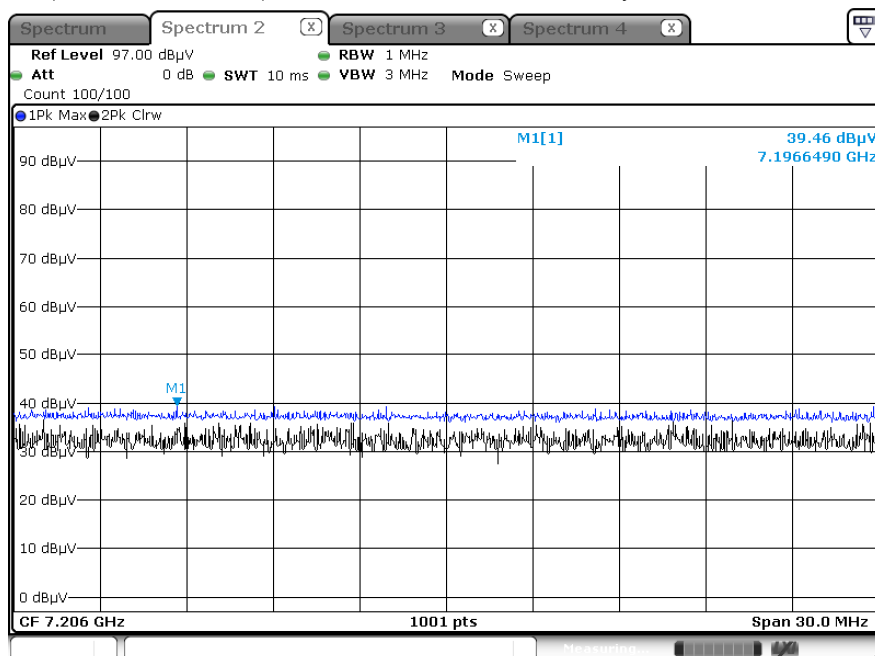


# [Simultaneous transmission Scenario]


## Scenario 1

BT LE 1M 37 byte Ch.37 + UNII 802.11a 6 Mbps Ch.36

### Radiated Spurious Emissions plot – Average Result (3rd Harmonic, X-H)

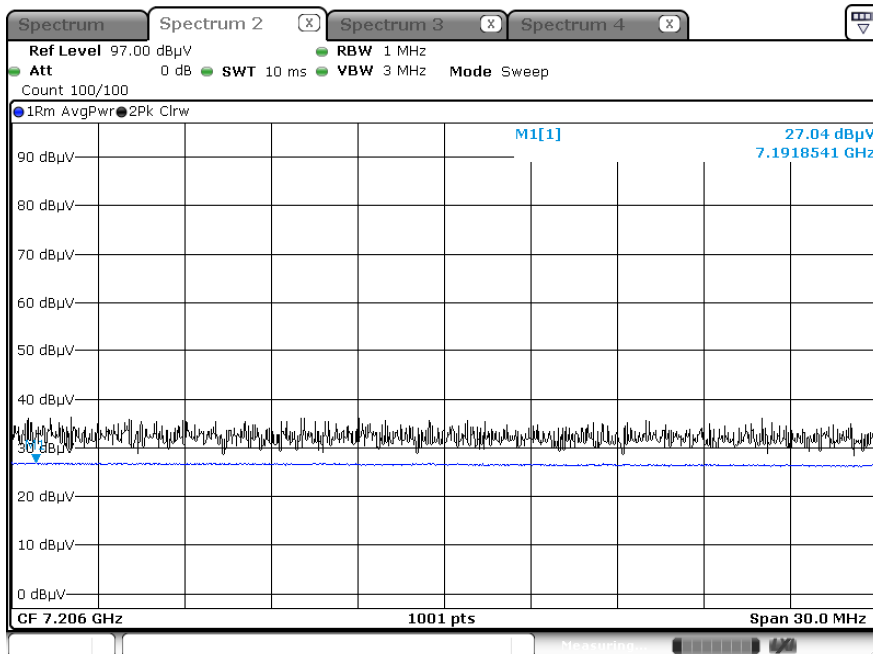

### Radiated Spurious Emissions plot – Peak Result (3rd Harmonic, X-H)

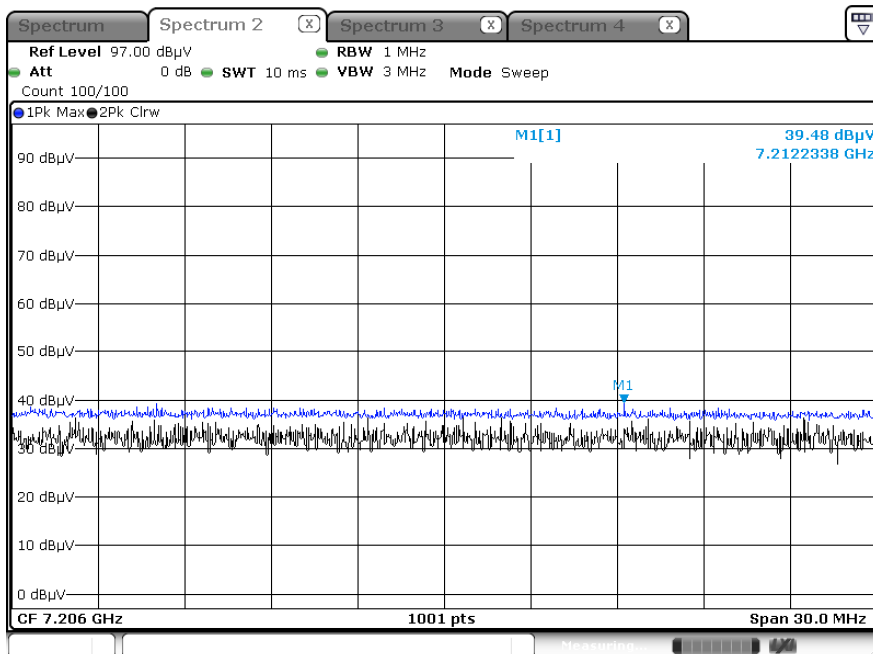


## 9.7 RADIATED RESTRICTED BAND EDGES


| 1 M Bit/s (37 Bytes)  |                |                   |                    |          |          |        |             |
|-----------------------|----------------|-------------------|--------------------|----------|----------|--------|-------------|
| Channel               | 37 CH, 39 CH   | Channel Frequency | 2402 MHz, 2480 MHz |          |          |        |             |
| Frequency             | Measured Value | A.F+C.L-A.G+D.F   | ANT. POL           | Total    | Limit    | Margin | Measurement |
| [MHz]                 | [dBμV]         | [dB/m]            | [H/V]              | [dBμV/m] | [dBμV/m] | [dB]   | Type        |
| 2390.0                | 54.42          | -                 | H                  | 54.42    | 73.98    | 19.56  | PK          |
| 2390.0                | 42.34          | -                 | H                  | 42.34    | 53.98    | 11.64  | AV          |
| 2483.5                | 64.10          | -                 | H                  | 64.10    | 73.98    | 9.88   | PK          |
| 2483.5                | 44.49          | -                 | H                  | 44.49    | 53.98    | 9.49   | AV          |
| 1 M Bit/s (255 Bytes) |                |                   |                    |          |          |        |             |
| Channel               | 37 CH, 39 CH   | Channel Frequency | 2402 MHz, 2480 MHz |          |          |        |             |
| Frequency             | Measured Value | A.F+C.L-A.G+D.F   | ANT. POL           | Total    | Limit    | Margin | Measurement |
| [MHz]                 | [dBμV]         | [dB/m]            | [H/V]              | [dBμV/m] | [dBμV/m] | [dB]   | Type        |
| 2390.0                | 54.86          | -                 | H                  | 54.86    | 73.98    | 19.12  | PK          |
| 2390.0                | 42.34          | -                 | H                  | 42.34    | 53.98    | 11.64  | AV          |
| 2483.5                | 63.81          | -                 | H                  | 63.81    | 73.98    | 10.17  | PK          |
| 2483.5                | 44.65          | -                 | H                  | 44.65    | 53.98    | 9.33   | AV          |
| 2 M Bit/s (37 Bytes)  |                |                   |                    |          |          |        |             |
| Channel               | 0 CH, 36 CH    | Channel Frequency | 2404 MHz, 2478 MHz |          |          |        |             |
| Frequency             | Measured Value | A.F+C.L-A.G+D.F   | ANT. POL           | Total    | Limit    | Margin | Measurement |
| [MHz]                 | [dBμV]         | [dB/m]            | [H/V]              | [dBμV/m] | [dBμV/m] | [dB]   | Type        |
| 2390.0                | 54.72          | -                 | H                  | 54.72    | 73.98    | 19.26  | PK          |
| 2390.0                | 42.33          | -                 | H                  | 42.33    | 53.98    | 11.65  | AV          |
| 2483.5                | 56.42          | -                 | H                  | 56.42    | 73.98    | 17.56  | PK          |
| 2483.5                | 43.68          | -                 | H                  | 43.68    | 53.98    | 10.30  | AV          |
| 2 M Bit/s (255 Bytes) |                |                   |                    |          |          |        |             |
| Channel               | 0 CH, 36 CH    | Channel Frequency | 2404 MHz, 2478 MHz |          |          |        |             |
| Frequency             | Measured Value | A.F+C.L-A.G+D.F   | ANT. POL           | Total    | Limit    | Margin | Measurement |
| [MHz]                 | [dBμV]         | [dB/m]            | [H/V]              | [dBμV/m] | [dBμV/m] | [dB]   | Type        |
| 2390.0                | 54.84          | -                 | H                  | 54.84    | 73.98    | 19.14  | PK          |
| 2390.0                | 42.33          | -                 | H                  | 42.33    | 53.98    | 11.65  | AV          |
| 2483.5                | 56.55          | -                 | H                  | 56.55    | 73.98    | 17.43  | PK          |
| 2483.5                | 43.87          | -                 | H                  | 43.87    | 53.98    | 10.11  | AV          |

## Test Plots

Radiated Restricted Band Edges plot – Average Result (1 M Bit/s 255 Bytes, Ch.39, X-H)

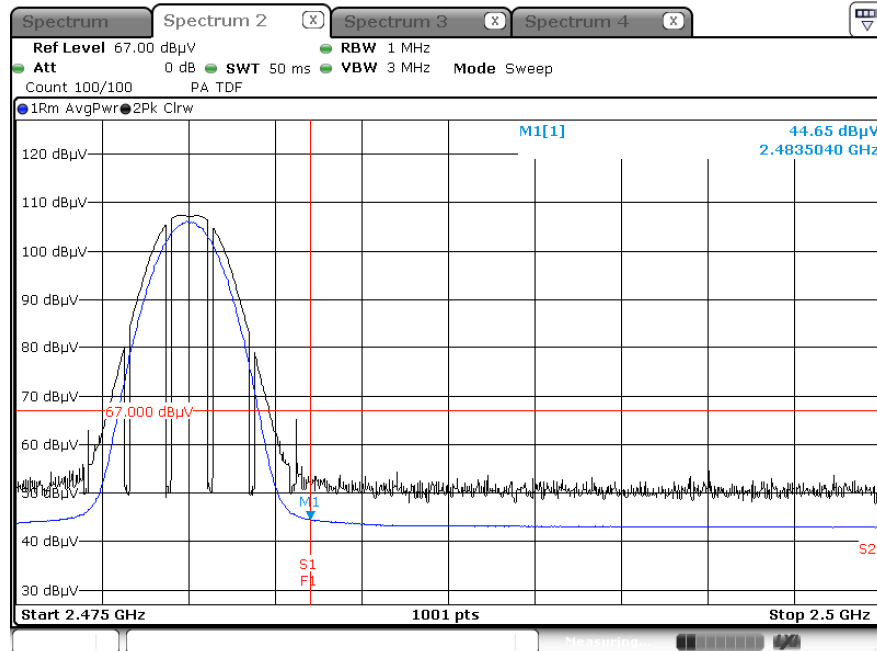

Radiated Restricted Band Edges plot – Peak Result (1 M Bit/s 255 Bytes, Ch.39, X-H)

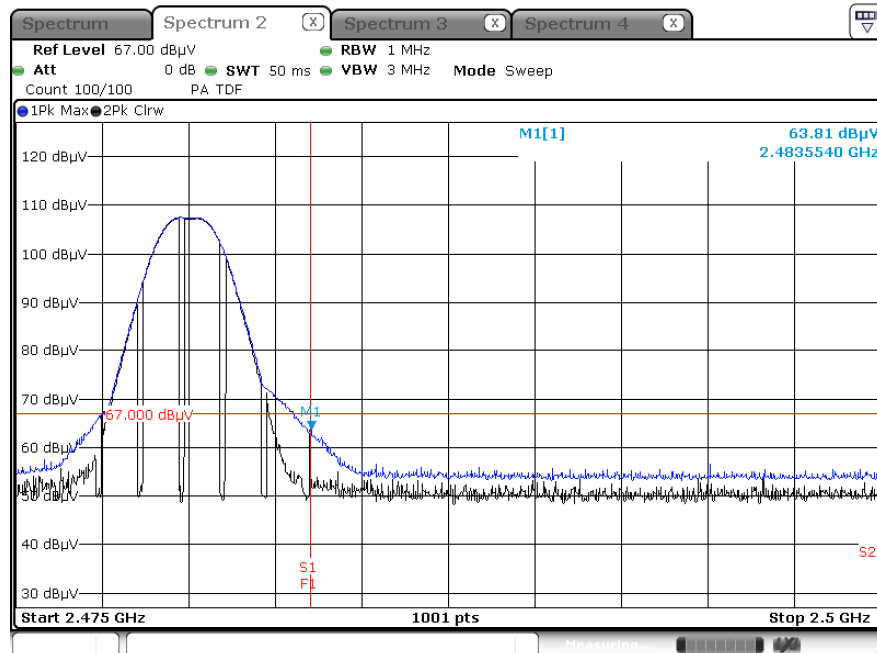

### Note:

In order to simplify the report, Plot of worst case are only reported.

## 9.8 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions

Test


1 / 1

## Test Report

### Common Information

EUT : SM-A176U  
Operating Conditions : BTLE Mode  
Comment :

Full Spectrum

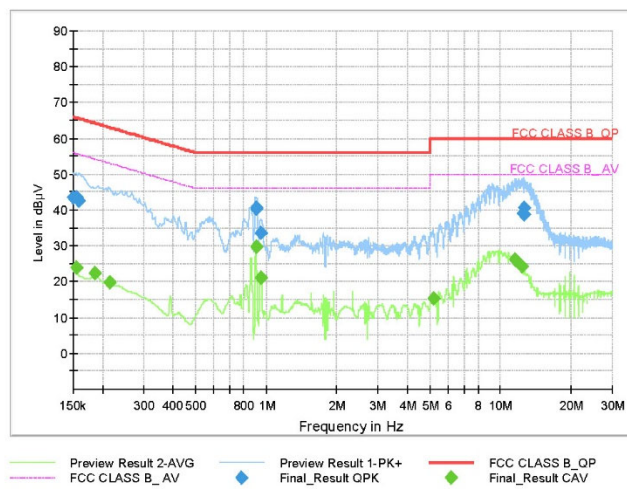

### Final Result QPK

| Frequency (MHz) | QuasiPeak (dBµV) | Limit (dBµV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|--------------|-------------|-----------------|------|------------|
| 0.1500          | 43.61            | 66.00        | 22.39       | 9.000           | L1   | 9.8        |
| 0.1545          | 43.54            | 65.75        | 22.21       | 9.000           | N    | 9.7        |
| 0.1590          | 42.59            | 65.52        | 22.92       | 9.000           | N    | 9.7        |
| 0.9028          | 40.17            | 56.00        | 15.83       | 9.000           | N    | 9.7        |
| 0.9095          | 40.73            | 56.00        | 15.27       | 9.000           | N    | 9.7        |
| 0.9523          | 33.49            | 56.00        | 22.51       | 9.000           | N    | 9.7        |
| 12.5420         | 39.10            | 60.00        | 20.90       | 9.000           | L1   | 10.3       |
| 12.5758         | 40.63            | 60.00        | 19.37       | 9.000           | L1   | 10.3       |
| 12.6680         | 38.60            | 60.00        | 21.40       | 9.000           | L1   | 10.3       |

### Final Result CAV

| Frequency (MHz) | CAverage (dBµV) | Limit (dBµV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-----------------|--------------|-------------|-----------------|------|------------|
| 0.1545          | 24.03           | 55.75        | 31.72       | 9.000           | L1   | 9.8        |
| 0.1860          | 22.47           | 54.21        | 31.75       | 9.000           | L1   | 9.8        |
| 0.2153          | 19.93           | 53.00        | 33.07       | 9.000           | L1   | 9.8        |
| 0.9050          | 29.63           | 46.00        | 16.37       | 9.000           | L1   | 9.8        |
| 0.9478          | 21.02           | 46.00        | 24.98       | 9.000           | L1   | 9.8        |
| 5.1710          | 15.17           | 50.00        | 34.83       | 9.000           | L1   | 10.0       |
| 11.5520         | 26.11           | 50.00        | 23.89       | 9.000           | L1   | 10.2       |
| 11.6465         | 26.02           | 50.00        | 23.99       | 9.000           | L1   | 10.2       |
| 12.3530         | 24.27           | 50.00        | 25.73       | 9.000           | L1   | 10.3       |

2025-09-23

오전 9:48:40

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

| Equipment                      | Model                   | Manufacturer    | Serial No. | Due to Calibration | Calibration Interval |
|--------------------------------|-------------------------|-----------------|------------|--------------------|----------------------|
| LISN                           | ENV216                  | Rohde & Schwarz | 102245     | 07/15/2026         | Annual               |
| EMI Test Receiver              | ESR                     | Rohde & Schwarz | 101910     | 08/20/2026         | Annual               |
| Temperature Chamber            | SU-642                  | ESPEC           | 0093008124 | 02/11/2026         | Annual               |
| Signal Analyzer                | N9030A                  | Agilent         | MY49432108 | 02/18/2026         | Annual               |
| Power Measurement Set          | OSP 120                 | Rohde & Schwarz | 100935     | 07/24/2026         | Annual               |
| Power Meter                    | N1911A                  | Agilent         | MY45100523 | 02/21/2026         | Annual               |
| Power Sensor                   | N1921A                  | Agilent         | MY57820067 | 02/04/2026         | Annual               |
| Directional Coupler            | 87300B                  | Agilent         | 3116A03621 | 10/14/2026         | Annual               |
| Power Splitter                 | 11667B                  | Hewlett Packard | 10545      | 01/23/2026         | Annual               |
| DC Power Supply                | E3632A                  | Agilent         | KR75303243 | 04/16/2026         | Annual               |
| Attenuator(10 dB)(DC-26.5 GHz) | 8493C                   | HP              | 07560      | 05/27/2026         | Annual               |
| Attenuator(10 dB)(DC-26.5 GHz) | 8493C                   | HP              | 08285      | 05/19/2026         | Annual               |
| Attenuator(20 dB)              | 18N-20dB                | Rohde & Schwarz | 8          | 02/18/2026         | Annual               |
| Software                       | EMC32                   | Rohde & Schwarz | N/A        | N/A                | N/A                  |
| Bluetooth Tester               | CBT                     | Rohde & Schwarz | 100752     | 12/27/2025         | Annual               |
| Automation Software            | FCC WLAN Conducted      | HCT CO., LTD    | N/A        | N/A                | N/A                  |
| Automation Software            | FCC Bluetooth Conducted | HCT CO., LTD    | N/A        | N/A                | N/A                  |

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

### Radiated Test

| Equipment                           | Model                                    | Manufacturer           | Serial No.            | Due to Calibration | Calibration Interval |
|-------------------------------------|------------------------------------------|------------------------|-----------------------|--------------------|----------------------|
| Controller                          | CO3000                                   | Innco system           | CO3000-4p             | N/A                | N/A                  |
| Antenna Position Tower              | MA4640/800-XP-EP                         | Innco system           | S1AM                  | 07/25/2026         | Annual               |
| Turn Table                          | DS2000-S-1t                              | Innco system           | DS2000/572/54610422/P | N/A                | N/A                  |
| Amp & Filter Bank Switch Controller | FBSM-01B                                 | T&M system             | TM19050002            | N/A                | N/A                  |
| Loop Antenna                        | 1513                                     | Schwarzbeck            | 1513-175              | 01/06/2027         | Biennial             |
| Hybrid Antenna                      | VULB 9168                                | Schwarzbeck            | 9168-0895             | 08/28/2026         | Biennial             |
| Horn Antenna                        | BBHA 9120D                               | Schwarzbeck            | 9120D-1300            | 01/03/2026         | Biennial             |
| Horn Antenna                        | BBHA 9120D                               | Schwarzbeck            | 9120D-2296            | 05/16/2026         | Biennial             |
| Horn Antenna(15 GHz ~ 40 GHz)       | BBHA9170                                 | Schwarzbeck            | BBHA9170342           | 09/20/2026         | Biennial             |
| Spectrum Analyzer                   | FSV(10 Hz ~ 40 GHz)                      | Rohde & Schwarz        | 101055                | 05/07/2026         | Annual               |
| Band Reject Filter                  | WRCJV2400/2483.5-2370/2520-60/12SS       | Wainwright Instruments | 2                     | 12/26/2025         | Annual               |
| Band Reject Filter                  | WRCJV12-4900-5100-5900-6100-50SS         | Wainwright Instruments | 5                     | 05/27/2026         | Annual               |
| Band Reject Filter                  | WRCJV12-4900-5100-5900-6100-50SS         | Wainwright Instruments | 6                     | 05/27/2026         | Annual               |
| High Pass Filter(7 GHz ~ 18 GHz)    | WHKX10-7150-8000-18000-50SS              | Wainwright Instruments | 1                     | 02/21/2026         | Annual               |
| Power Amplifier                     | CBL18265035                              | CERNEX                 | 22966                 | 10/21/2026         | Annual               |
| Power Amplifier                     | CBL26405040                              | CERNEX                 | 25956                 | 02/19/2026         | Annual               |
| Bluetooth Tester                    | TC-3000C                                 | TESCOM                 | 3000C000175           | 03/12/2026         | Annual               |
| RF Switching System                 | FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))  | T&M system             | S1L1                  | 12/23/2025         | Annual               |
| RF Switching System                 | FMSR -05B (ATT(10dB) + LNA1(1~18GHz))    | T&M system             | S1L2                  | 12/23/2025         | Annual               |
| RF Switching System                 | FMSR -05B (ATT(3dB) + LNA1(1~18GHz))     | T&M system             | S1L3                  | 12/23/2025         | Annual               |
| RF Switching System                 | FMSR -05B (LNA1(1~18GHz))                | T&M system             | S1L4                  | 12/23/2025         | Annual               |
| RF Switching System                 | FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz)) | T&M system             | S1L5                  | 12/23/2025         | Annual               |
| RF Switching System                 | FMSR -05B (Thru(30MHz ~ 18GHz))          | T&M system             | S1L6                  | 12/23/2025         | Annual               |
| Automation Software                 | FCC WLAN Radiated                        | HCT CO., LTD           | N/A                   | N/A                | N/A                  |
| Attenuator(3 dB)                    | 18B-03                                   | Api tech.              | 1                     | 04/21/2026         | Annual               |

#### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2510-FC036-P |