



**FCC 47 CFR PART 15 SUBPART E
INDUSTRY CANADA RSS-247 ISSUE 2**

UNII

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

MODEL NUMBER : SM-A205W

FCC ID: A3LSMA205W

IC: 649E-SMA205W

REPORT NUMBER: 4788962183-E5V2

ISSUE DATE: MAY 08, 2019

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
**UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



ACCREDITED*

Testing
Laboratory

TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	05/07/19	Initial issue	Hyunsik Yun
V2	05/08/19	Updated to address TCB's question	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. SUMMARY TABLE	14
8. MEASUREMENT METHODS	15
9. REFERENCE MEASUREMENTS RESULTS	16
9.1. ON TIME AND DUTY CYCLE RESULTS	16
9.2. DUTY CYCLE PLOTS	16
9.3. 26 dB BANDWIDTH	19
9.3.1. 802.11a MODE IN THE 5.2 GHz BAND	20
9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	20
9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	20
9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	20
9.3.5. 802.11a MODE IN THE 5.3 GHz BAND	21
9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	21
9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND	21
9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	21
9.3.9. 802.11a MODE IN THE 5.5 GHz BAND	22
9.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND	22
9.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND	22
9.3.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND	22
9.3.13. 802.11a MODE IN THE 5.8 GHz BAND	23
9.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND	23
9.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND	23
9.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND	23
9.3.17. 26 dB BANDWIDTH PLOTS	24
9.4. 99% BANDWIDTH	37
9.4.1. 802.11a MODE IN THE 5.2 GHz BAND	38
9.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	38

9.4.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	38
9.4.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	38
9.4.5.	802.11a MODE IN THE 5.3 GHz BAND	39
9.4.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	39
9.4.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	39
9.4.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	39
9.4.9.	802.11a MODE IN THE 5.5 GHz BAND	40
9.4.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	40
9.4.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	40
9.4.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	40
9.4.13.	802.11a MODE IN THE 5.8 GHz BAND	41
9.4.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	41
9.4.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	41
9.4.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	41
9.4.17.	99% BANDWIDTH PLOTS	42
10.	ANTENNA PORT TEST RESULTS	55
10.1.	6 dB BANDWIDTH	55
10.1.1.	802.11a MODE IN THE 5.8 GHz BAND	56
10.1.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	56
10.1.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	56
10.1.4.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	56
10.1.5.	6 dB BANDWIDTH PLOTS	57
10.2.	OUTPUT POWER AND PPSD	61
10.2.1.	802.11a MODE IN THE 5.2 GHz BAND	63
10.2.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	64
10.2.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	65
10.2.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	66
10.2.5.	802.11a MODE IN THE 5.3 GHz BAND	67
10.2.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	68
10.2.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	69
10.2.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	70
10.2.9.	802.11a MODE IN THE 5.5 GHz BAND	71
10.2.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	72
10.2.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	73
10.2.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	74
10.2.13.	802.11a MODE IN THE 5.8 GHz BAND	75
10.2.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	76
10.2.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	77
10.2.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	78
10.2.17.	802.11a MODE IN THE STRADDLE CHANNEL	79
10.2.18.	802.11n HT20 MODE IN THE STRADDLE CHANNEL	80
10.2.19.	802.11n HT40 MODE IN THE STRADDLE CHANNEL	81
10.2.20.	802.11ac VHT80 MODE IN THE STRADDLE CHANNEL	82
10.2.21.	OUTPUT POWER AND PPSD PLOTS	83
11.	TRANSMITTER ABOVE 1 GHz.....	100
11.1.	5.2 GHz	102
11.1.1.	TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND	102
11.1.2.	TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND	110

11.1.3.	TX Above 1GHz 802.11n HT40	MODE IN THE 5.2GHz BAND	118
11.1.4.	TX Above 1GHz 802.11ac VHT80	MODE IN THE 5.2GHz BAND	124
11.2.	5.3 GHz		128
11.2.1.	TX ABOVE 1 GHz 802.11a	MODE IN THE 5.3 GHz BAND	128
11.2.2.	TX ABOVE 1GHz 802.11n HT20	MODE IN THE 5.3GHz BAND	136
11.2.3.	TX ABOVE 1GHz 802.11n HT40	MODE IN THE 5.3GHz BAND	144
11.2.4.	TX Above 1GHz 802.11ac VHT80	MODE IN THE 5.2GHz BAND	150
11.3.	5.5-5.6 GHz		154
11.3.1.	TX ABOVE 1 GHz 802.11a	MODE IN THE 5.5 GHz BAND	154
11.3.2.	TX ABOVE 1GHz 802.11n HT20	MODE IN THE 5.5GHz BAND	164
11.3.3.	TX ABOVE 1GHz 802.11n HT40	MODE IN THE 5.5GHz BAND	174
11.3.4.	TX ABOVE 1GHz 802.11ac VHT80	MODE IN THE 5.5GHz BAND	184
11.4.	5.8 GHz		192
11.4.1.	TX ABOVE 1GHz 802.11a	MODE IN THE 5.8GHz BAND	192
11.4.2.	TX ABOVE 1GHz 802.11n HT20	MODE IN THE 5.8GHz BAND	202
11.4.3.	TX ABOVE 1GHz 802.11n HT40	MODE IN THE 5.8GHz BAND	212
11.4.4.	TX ABOVE 1GHz 802.11ac VHT80	MODE IN THE 5.8GHz BAND	220
12.	WORST-CASE BELOW 1 GHz		226
13.	AC POWER LINE CONDUCTED EMISSIONS		228
14.	DYNAMIC FREQUENCY SELECTION		231
14.1.	OVERVIEW		231
14.1.1.	LIMITS		231
14.1.1.	TEST AND MEASUREMENT SYSTEM		235
14.1.2.	SETUP OF EUT		238
14.1.3.	DESCRIPTION OF EUT		239
14.2.	RESULTS FOR 20 MHz BANDWIDTH		240
14.2.1.	TEST CHANNEL		240
14.2.2.	RADAR WAVEFORM AND TRAFFIC		240
14.2.3.	OVERLAPPING CHANNEL TESTS		242
14.2.4.	MOVE AND CLOSING TIME		242
14.3.	RESULTS FOR 40 MHz BANDWIDTH		245
14.3.1.	TEST CHANNEL		245
14.3.2.	RADAR WAVEFORM AND TRAFFIC		245
14.3.3.	OVERLAPPING CHANNEL TESTS		247
14.3.4.	MOVE AND CLOSING TIME		247
14.4.	RESULTS FOR 80 MHz BANDWIDTH		250
14.4.1.	TEST CHANNEL		250
14.4.2.	RADAR WAVEFORM AND TRAFFIC		250
14.4.3.	OVERLAPPING CHANNEL TESTS		252
14.4.4.	MOVE AND CLOSING TIME		252
15.	SETUP PHOTOS		255

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

MODEL NUMBER: SM-A205W

SERIAL NUMBER: R38M307V1TX, R38M307V1JV, R38M307V1ZZ, R38M307TYEH,
R38M4045RJX (RADIATED);
R38M307VGTM, 5200323b465826c5 (CONDUCTED);

DATE TESTED: APR 24, 2019 - MAY 06, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-247 Issue 2	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

HyunSik Yun
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. IC RSS-GEN Issue 4
4. IC RSS-247 Issue 2
5. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
6. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
7. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
8. KDB 662911 D01 v02r01
9. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☒ Chamber 2
☒ Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2.SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3.MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.86 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.97 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.57 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1.DESCRPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.
This test report addresses the NII (UNII) operational mode.

5.2.MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power	
		[dBm]	[mW]
5180 - 5240	802.11a	16.100	40.74
	802.11n HT20	14.960	31.33
5190 - 5230	802.11n HT40	13.310	21.43
5210	802.11ac VHT80	11.420	13.87
5260 - 5320	802.11a	15.900	38.90
	802.11n HT20	14.830	30.41
5270 - 5310	802.11n HT40	11.760	15.00
5290	802.11ac VHT80	11.020	12.65
5500 - 5720	802.11a	15.863	38.57
	802.11n HT20	14.030	25.29
5510 - 5710	802.11n HT40	12.290	16.94
5530 - 5690	802.11ac VHT80	9.635	9.19
5745 - 5825	802.11a	16.110	40.83
	802.11n HT20	15.030	31.84
5755 - 5795	802.11n HT40	13.400	21.88
5775	802.11ac VHT80	12.600	18.20

5.3.DESCRPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of:

Frequency Range [MHz]	Antenna Gain [dBi]
UNII 1 5150 – 5250	-2.57
UNII 2A 5250 – 5350	-2.02
UNII 2C 5470 – 5725	-2.76
UNII 3 5725 – 5850	-1.55

5.4.WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT80 mode: MCS0

Note : All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

5.5.DESCRPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37M1EKG A51DK3	N/A
Data Cable	SAMSUNG	EP-DR140AWE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC Power	1	C Type	Shielded	1.1m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

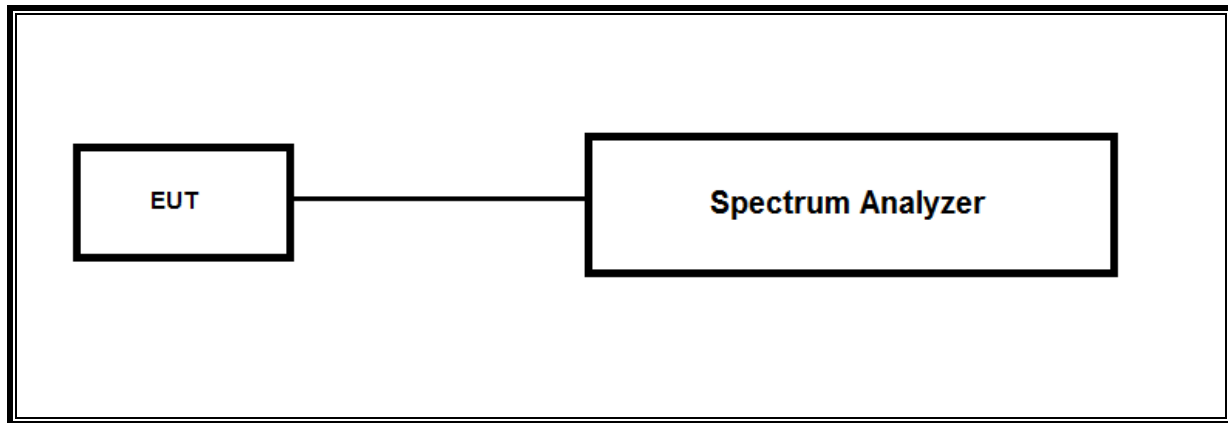

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

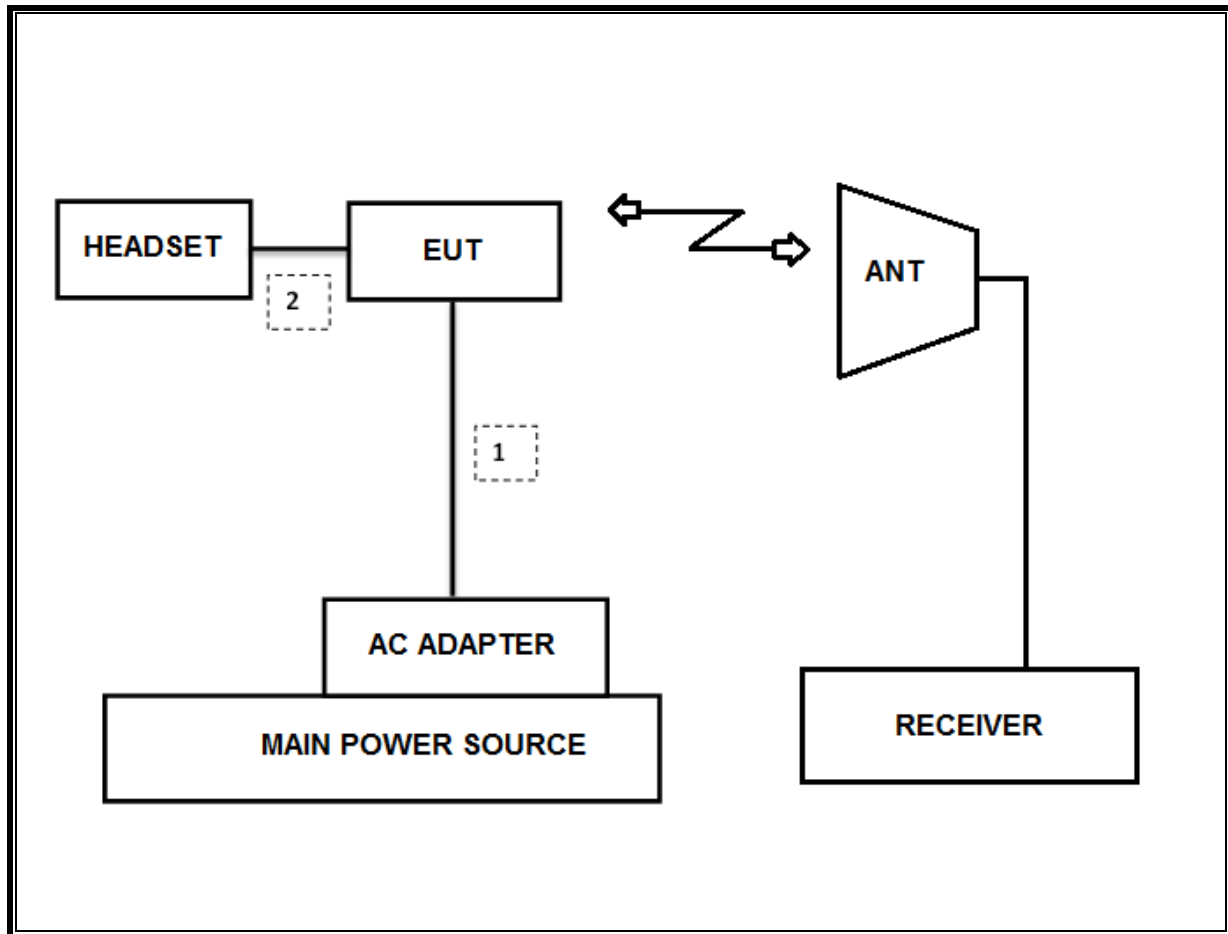

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	New Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	04-19-12
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-19-08
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-07-19
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-19
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-19
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-07-19
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-07-19
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-07-19
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-07-19
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-19
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-19
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-07-19
Attenuator	PASTERNAK	PE7087-10	A001	08-08-19
Attenuator	PASTERNAK	PE7087-10	A008	08-08-19
Attenuator	PASTERNAK	PE7004-10	2	08-07-19
Attenuator	PASTERNAK	PE7087-10	A009	08-08-19
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-19
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-19
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-06-19
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-06-19
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-07-19
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-07-19
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-19
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-07-19
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-07-19
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-19
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-07-19
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-07-19
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-19
LISN	R&S	ENV-216	101837	08-09-19
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	RSS Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	RSS-247 6.2.4	6dB Band width (5.8GHz)	500KHz	Condcuted	PASS
15.407 (a)(2)	RSS-247 6.2	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		PASS
15.407 (a)(3)	RSS-247 6.2.4	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		PASS
15.407 (a)(5)	RSS-247 6.2	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	RSS-247 6.2.4	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	RSS-GEN 8.8	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	RSS-GEN 8.9/7	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	RSS-247 6.3	Dynamic Frequency Selection	N/A	Condcuted	PASS

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section B.

6dB Emission BW : KDB 789033 D02 v02r01, Section C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section D.

Conducted Output Power : KDB 789033 D02 v02r01, Section E.3.a(Method PM)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):

KDB 789033 D02 v02r01, Section E.2.d(Method SA-2)

Power Spectral Density : KDB 789033 D02 v02r01, Section F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section G.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section G.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

9.1.ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11a	2.706	2.831	0.956	95.6%	0.20	0.370
802.11n HT20	2.515	2.630	0.956	95.6%	0.19	0.398
802.11n HT40	1.232	1.355	0.909	90.9%	0.41	0.812
802.11ac VHT80	0.596	0.620	0.961	96.1%	0.17	1.678


LIMITS



None; for reporting purposes only.


PROCEDURE

KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

9.2.DUTY CYCLE PLOTS

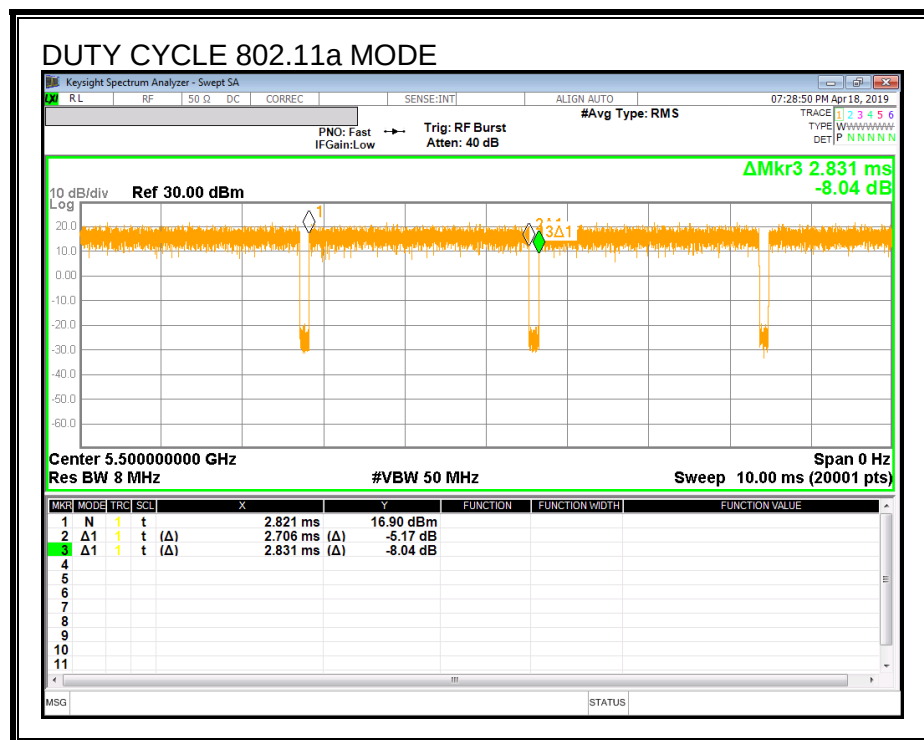

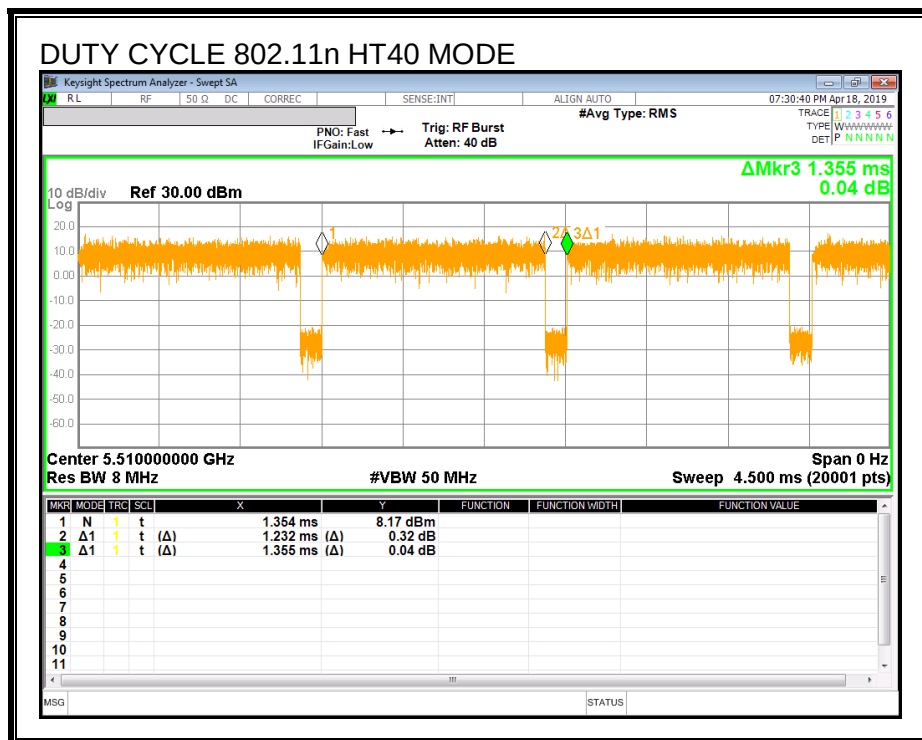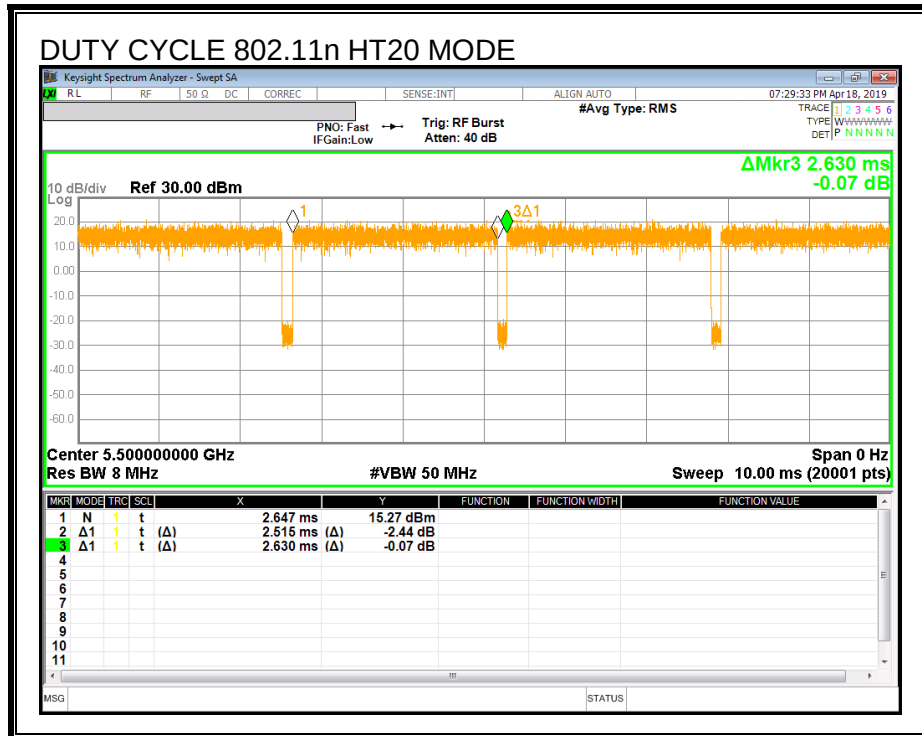

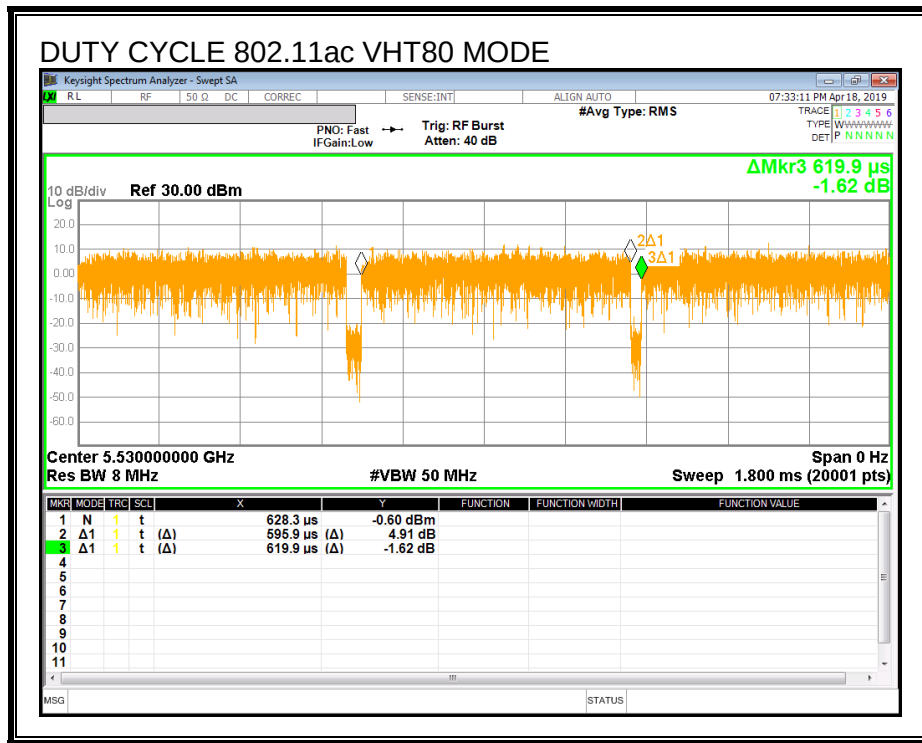

9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 26dB Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 26dB BW : 20.58MHz
- Turning Frequency : 5725MHz
- 26dB Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 - (20.58 / 2))) = 15.29 \text{ MHz}$
- 26dB Bandwidth of UNII-3 band Portion
 $= (5720 + (20.58 / 2) - 5725) = 5.29 \text{ MHz}$

RESULTS

9.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	22.22
Mid	5200	21.03
High	5240	22.26
Worst		22.26

9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	23.68
Mid	5200	21.20
High	5240	22.96
Worst		23.68

9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5190	55.61
High	5230	48.88
Worst		55.61

9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Mid	5210	78.43
Worst		78.43

9.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	22.70
Mid	5300	22.87
High	5320	21.21
Worst		22.87

9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	22.35
Mid	5300	21.69
High	5320	20.93
Worst		22.35

9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5270	42.38
High	5310	42.08
Worst		42.38

9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Mid	5290	78.52
Worst		78.52

9.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	20.62
Mid	5580	20.84
High	5700	20.81
Straddle	5720	15.95
Worst		20.84

9.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	21.02
Mid	5580	20.97
High	5700	21.04
Straddle	5720	15.37
Worst		21.04

9.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5510	41.65
Mid	5590	42.28
High	5670	41.95
Straddle	5710	35.75
Worst		42.28

9.3.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5530	78.34
High	5610	78.36
Straddle	5690	74.29
Worst		78.36

9.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	5.95
Low	5745	22.08
Mid	5785	22.08
High	5825	20.31
Worst		22.08

9.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	5.37
Low	5745	21.92
Mid	5785	21.41
High	5825	22.21
Worst		22.21

9.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5710	5.75
Low	5755	42.77
High	5795	41.84
Worst		42.77


9.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5690	4.29
Middle	5775	78.54
Worst		78.54


9.3.17. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

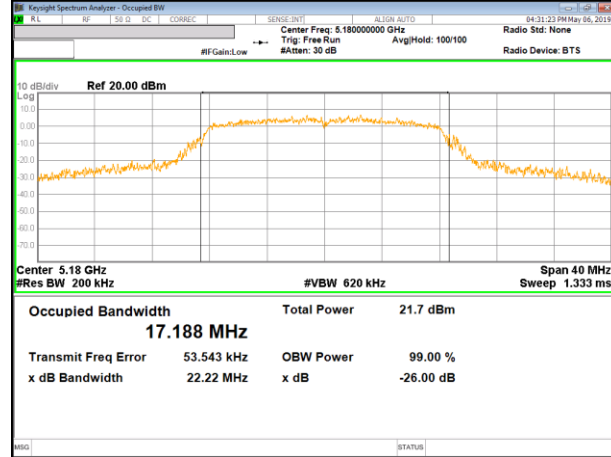

11a Mode Middle Channel

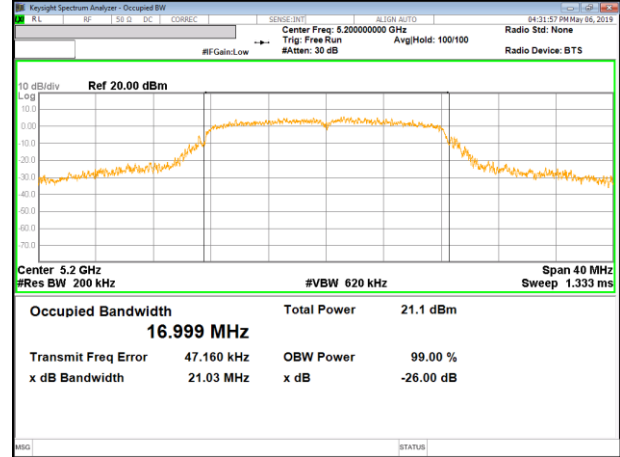


11a Mode High Channel

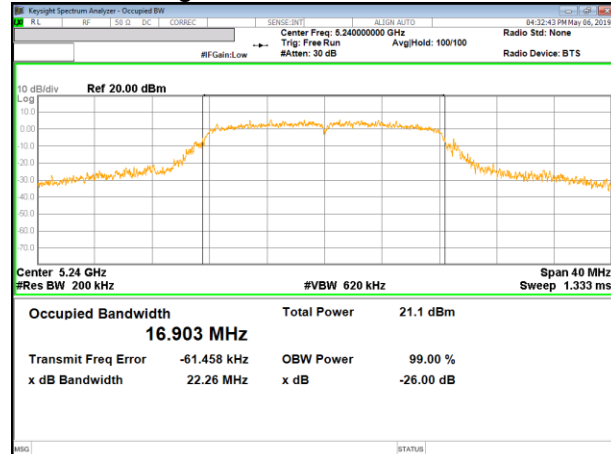


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

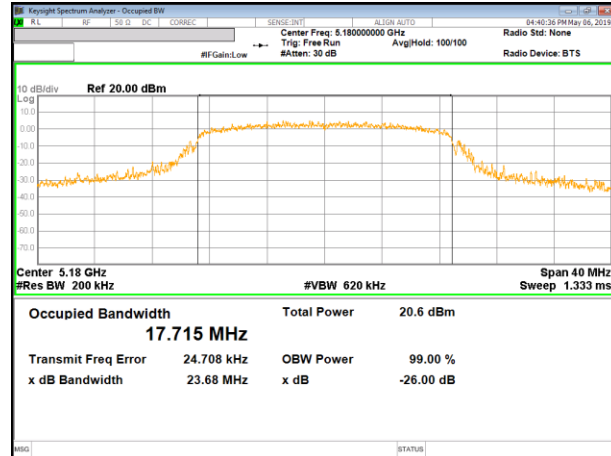


11n HT20 Mode Middle Channel

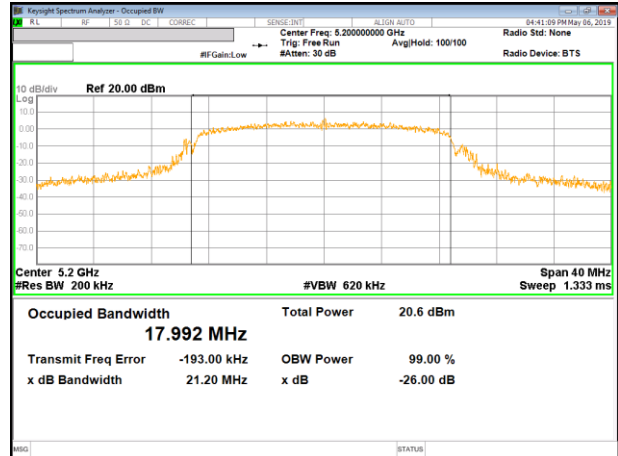


11n HT20 Mode High Channel

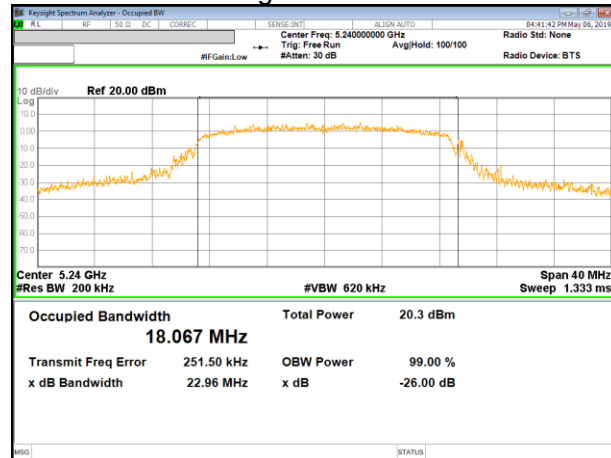

UNII 5.2 GHz IEEE 802.11n HT40 mode

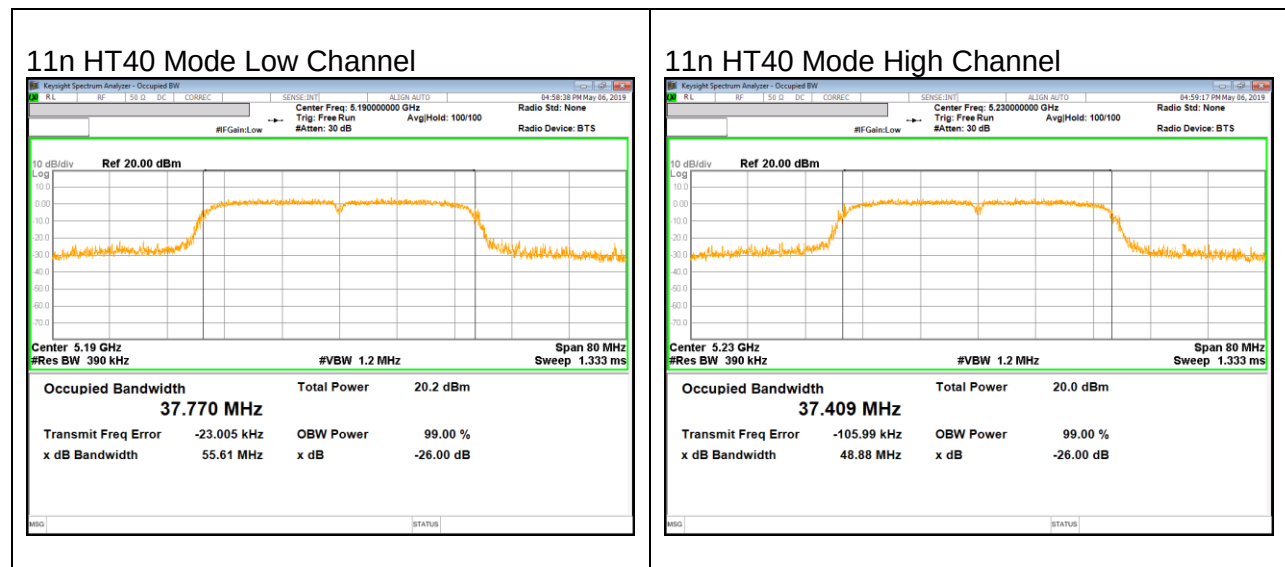


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

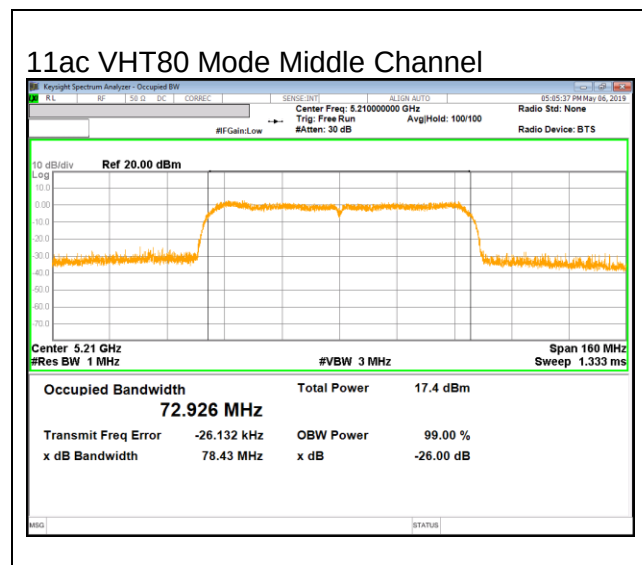


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

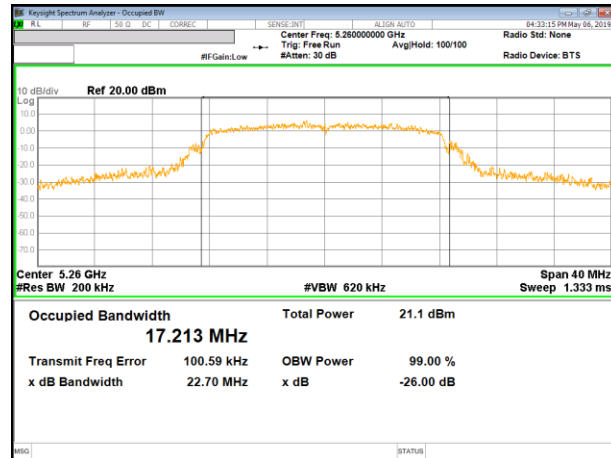

11a Mode Middle Channel

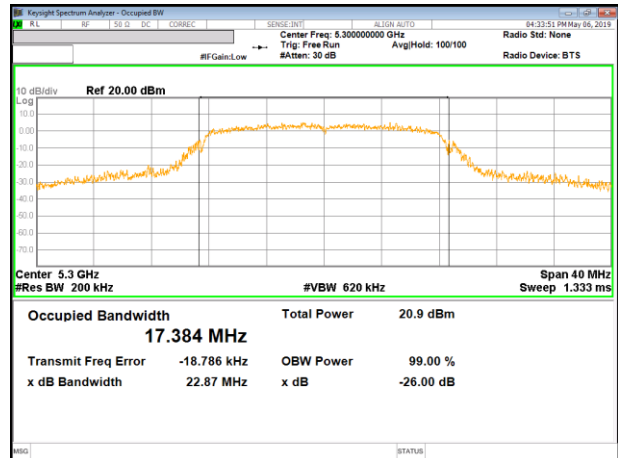


11a Mode High Channel

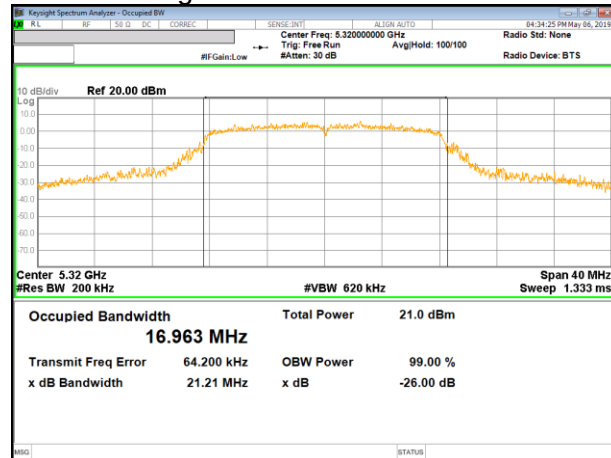


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

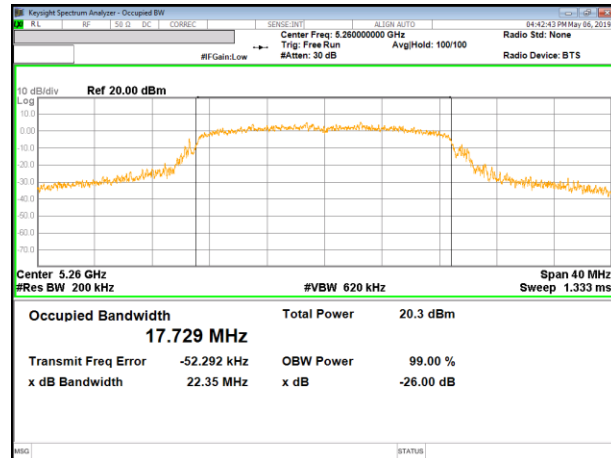


11n HT20 Mode Middle Channel

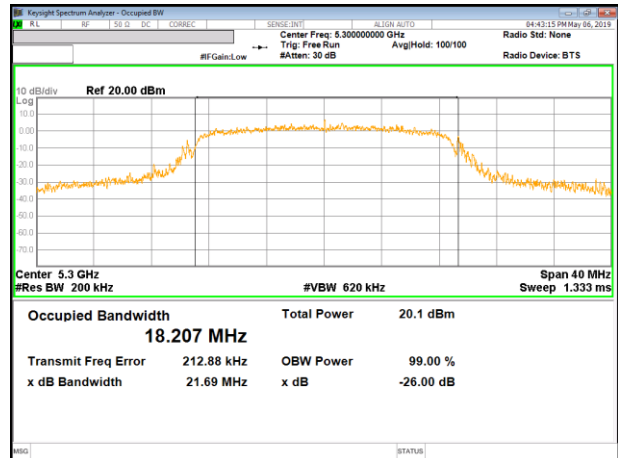


11n HT20 Mode High Channel

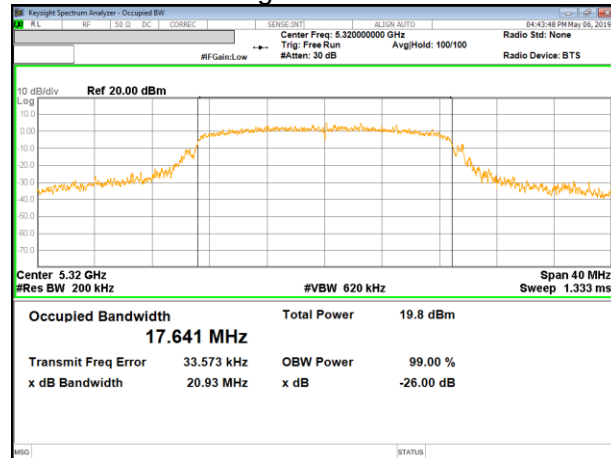

UNII 5.3 GHz IEEE 802.11n HT40 mode

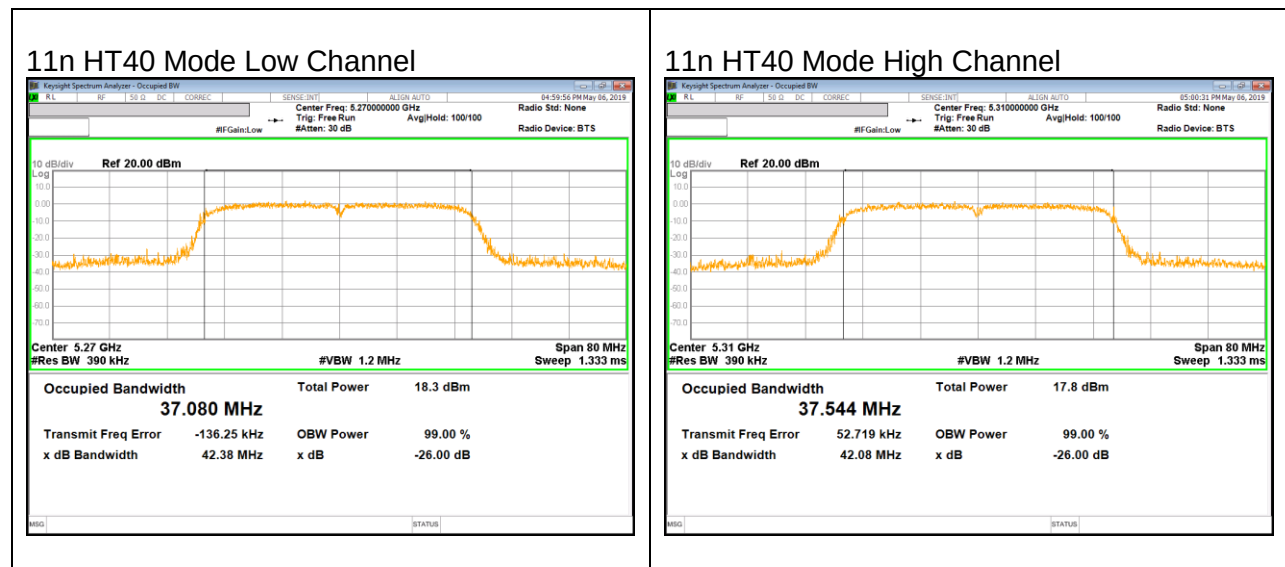

UNII 5.3 GHz IEEE 802.11ac VHT80 mode

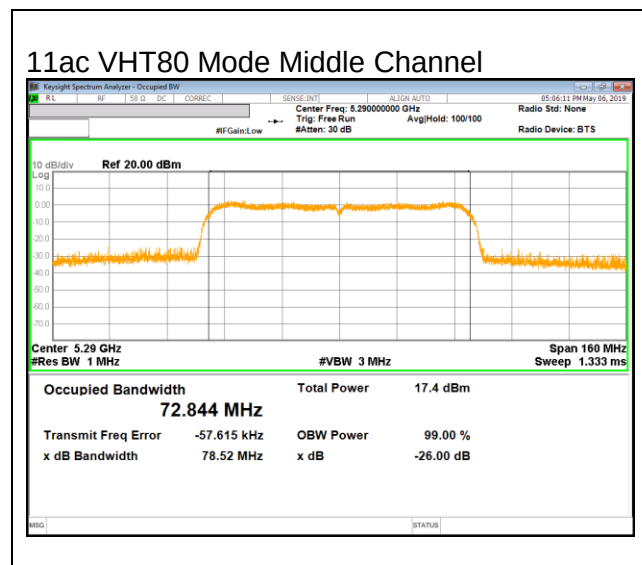


UNII 5.5 GHz IEEE 802.11a mode



UNII 5.5 GHz IEEE 802.11n HT20 mode




UNII 5.5 GHz IEEE 802.11n HT40 mode

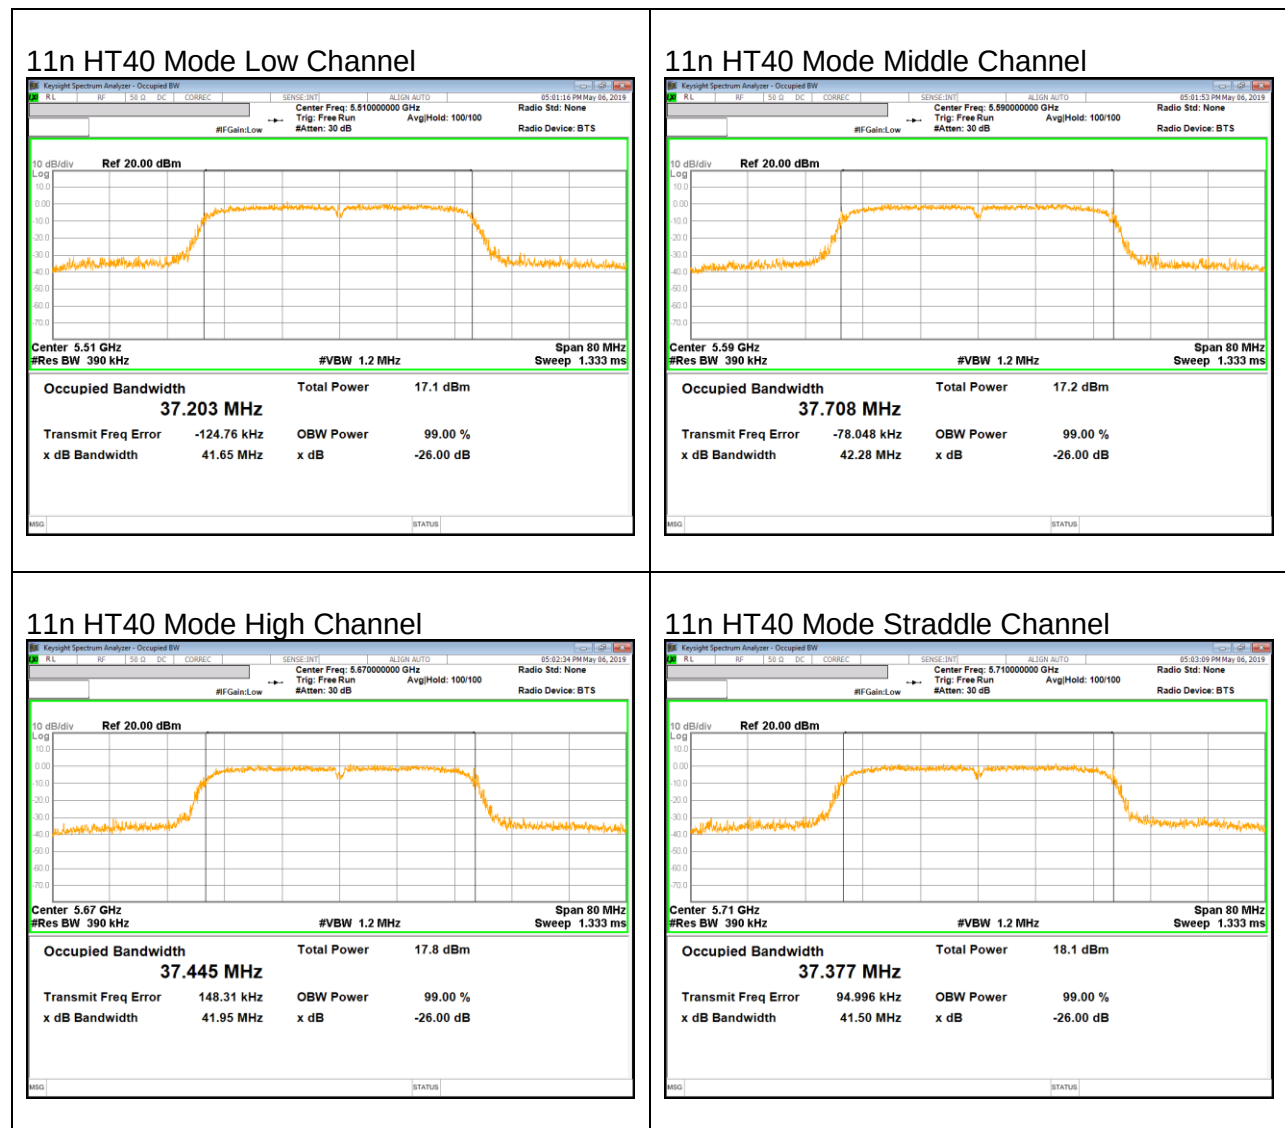


UNII 5.5 GHz IEEE 802.11ac VHT80 mode


11ac VHT80 Mode Low Channel

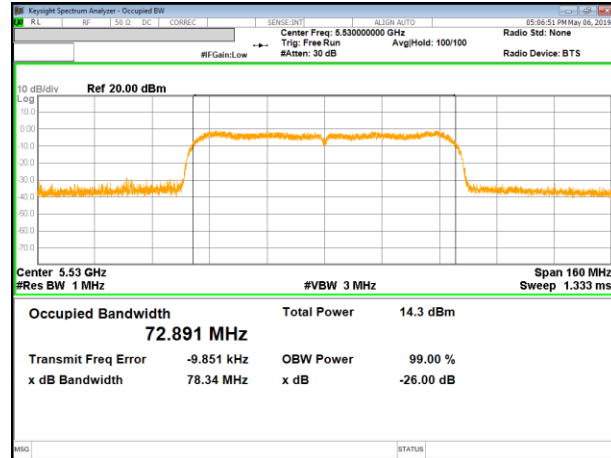

11ac VHT80 Mode High Channel

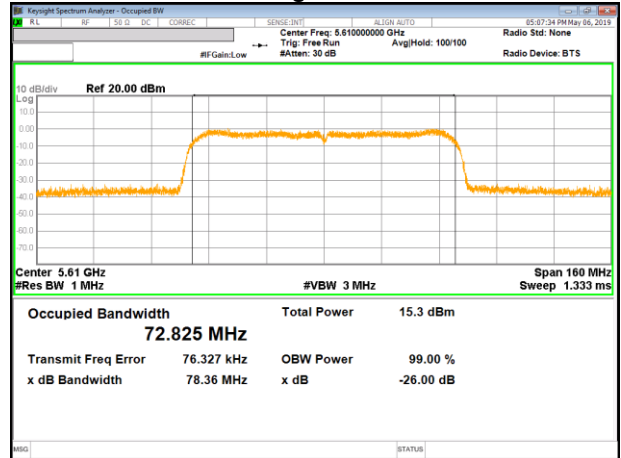


11ac VHT80 Mode Straddle Channel

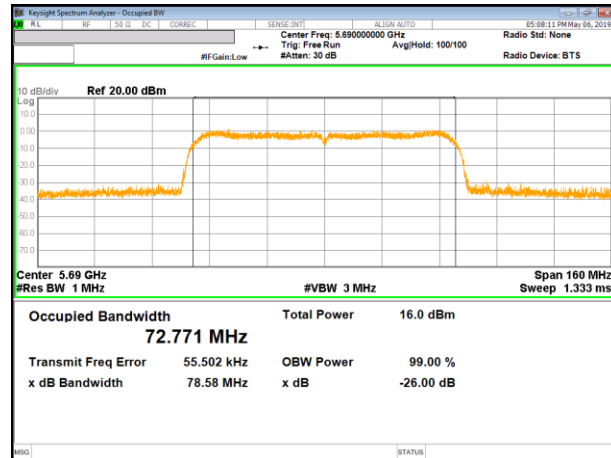


UNII 5.8 GHz IEEE 802.11a mode


11a Mode Low Channel

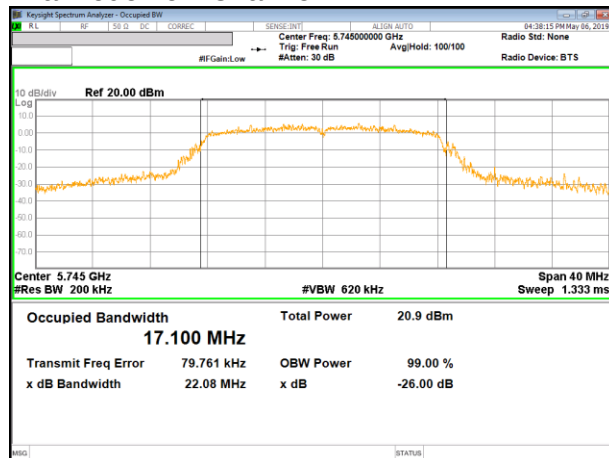

11a Mode Middle Channel

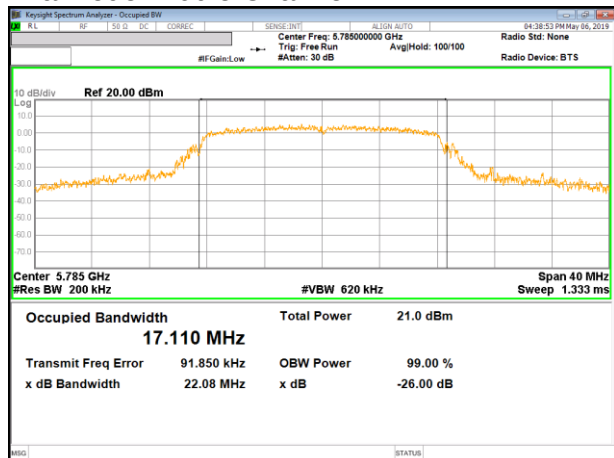


11a Mode High Channel

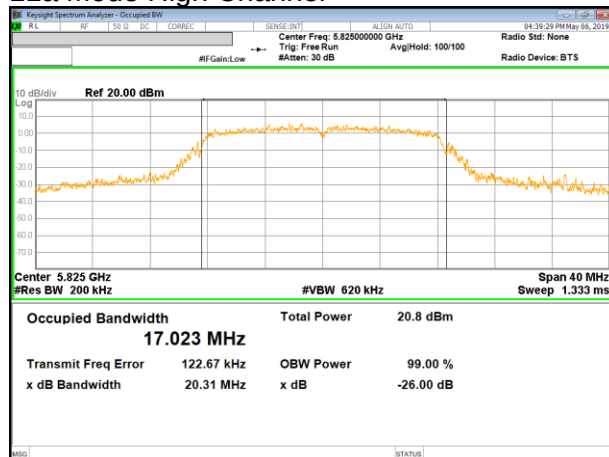


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

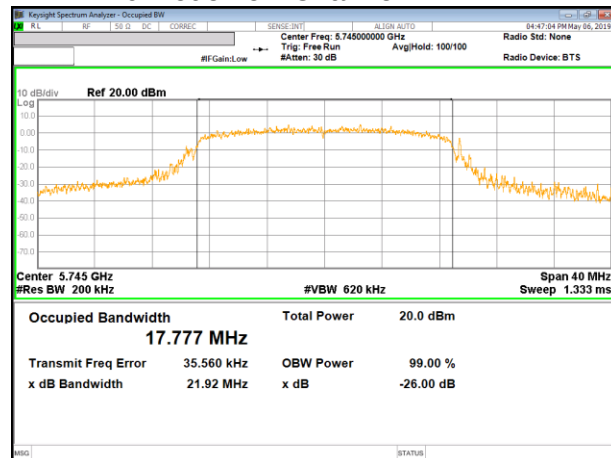


11n HT20 Mode Middle Channel

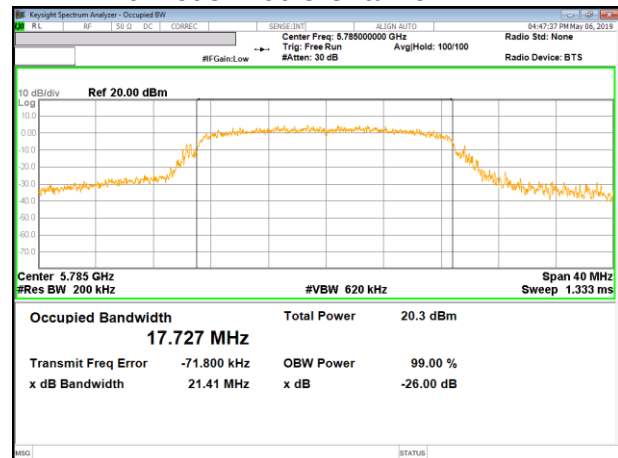


11n HT20 Mode High Channel

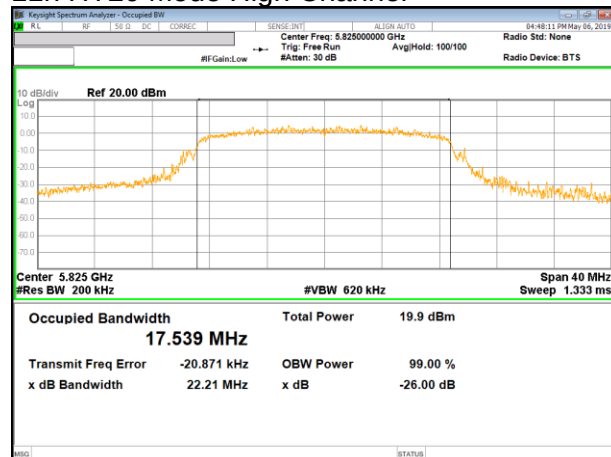

UNII 5.8 GHz IEEE 802.11n HT40 mode

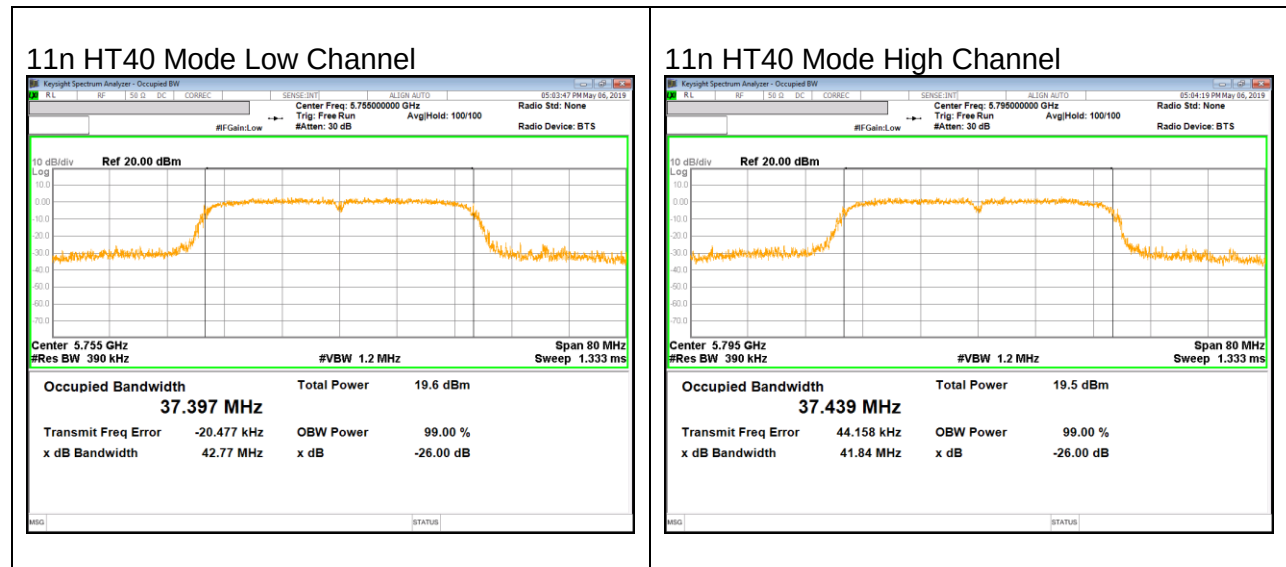

UNII 5.8 GHz IEEE 802.11ac VHT80 mode

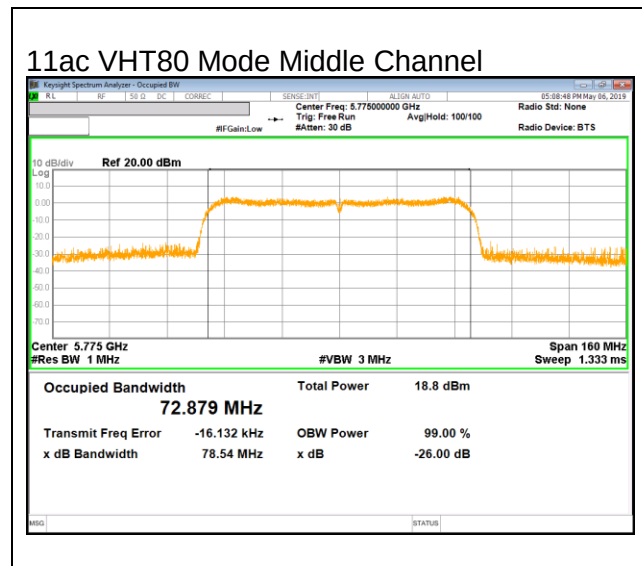

9.4.99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% to 5% of OBW, the VBW $\geq 3 \times$ RBW, single sweep.

NOTE

- Calculation for 99% Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 99% BW : 21.00MHz
- Turning Frequency : 5725MHz
- 99% Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 - (21.00 / 2))) = 15.50 \text{ MHz}$
- 99% Bandwidth of UNII-3 band Portion
 $= (5720 + (21.00 / 2) - 5725) = 5.50 \text{ MHz}$

RESULTS

9.4.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5180	16.37
Mid	5200	16.38
High	5240	16.39
Worst		16.39

9.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5180	17.39
Mid	5200	17.44
High	5240	17.42
Worst		17.44

9.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5190	36.13
High	5230	36.08
Worst		36.13

9.4.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Mid	5210	72.69
Worst		72.69

9.4.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5260	16.35
Mid	5300	16.37
High	5320	16.37
Worst		16.37

9.4.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5260	17.39
Mid	5300	17.41
High	5320	17.39
Worst		17.41

9.4.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5270	36.14
High	5310	36.02
Worst		36.14

9.4.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Mid	5290	72.76
Worst		72.76

9.4.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5500	16.37
Mid	5580	16.32
High	5700	16.33
Straddle	5720	13.17
Worst		16.37

9.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5500	17.39
Mid	5580	17.42
High	5700	17.40
Straddle	5720	13.70
Worst		17.42

9.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5510	36.07
Mid	5590	36.12
High	5670	36.02
Straddle	5710	33.03
Worst		36.12

9.4.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5530	72.77
High	5610	72.79
Straddle	5690	71.37
Worst		72.79

9.4.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5720	3.17
Low	5745	16.34
Mid	5785	16.37
High	5825	16.33
Worst		16.37

9.4.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5720	3.70
Low	5745	17.41
Mid	5785	17.39
High	5825	17.42
Worst		17.42

9.4.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5710	3.03
Low	5755	36.05
High	5795	36.11
Worst		36.11


9.4.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5690	1.37
Middle	5775	72.88
Worst		72.88


9.4.17. 99% BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

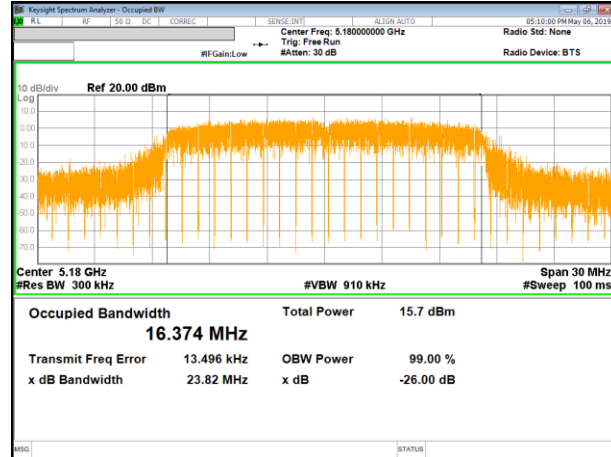

11a Mode Middle Channel

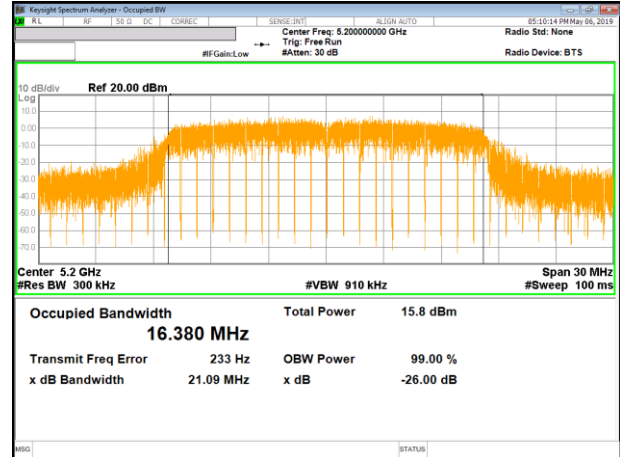


11a Mode High Channel

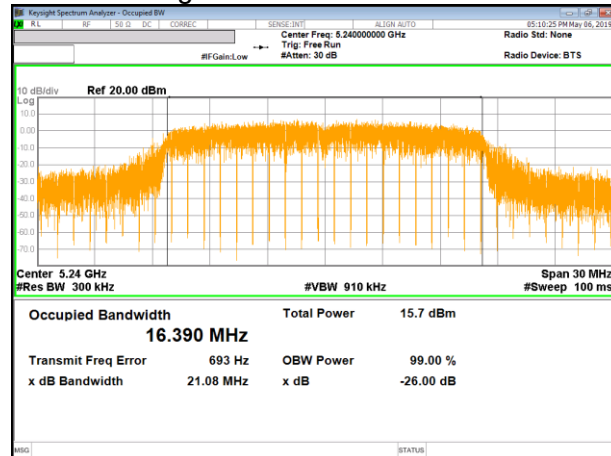


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

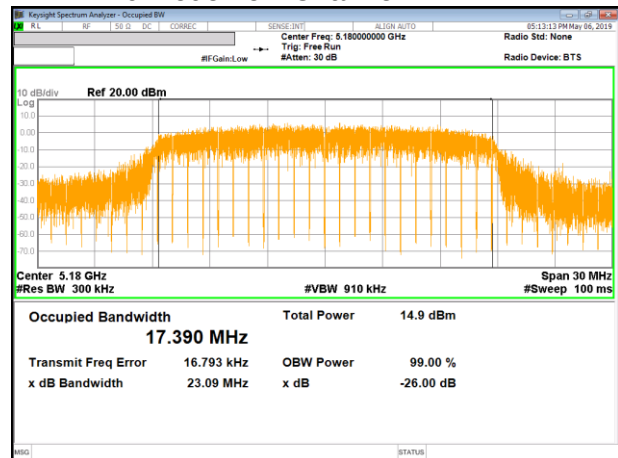


11n HT20 Mode Middle Channel

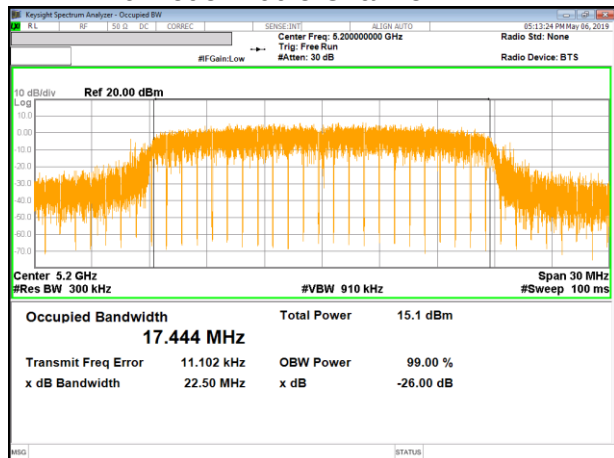


11n HT20 Mode High Channel

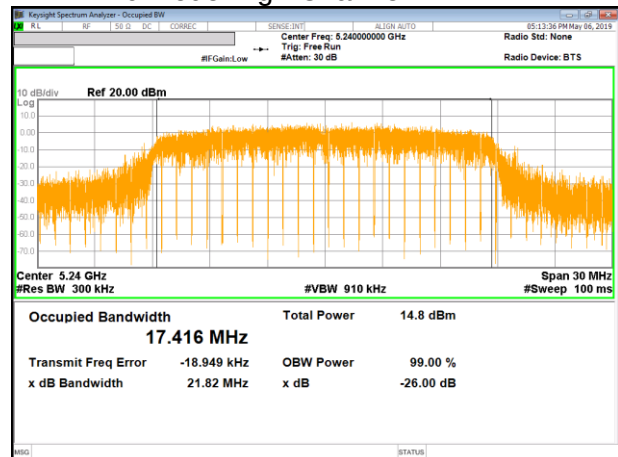

UNII 5.2 GHz IEEE 802.11n HT40 mode

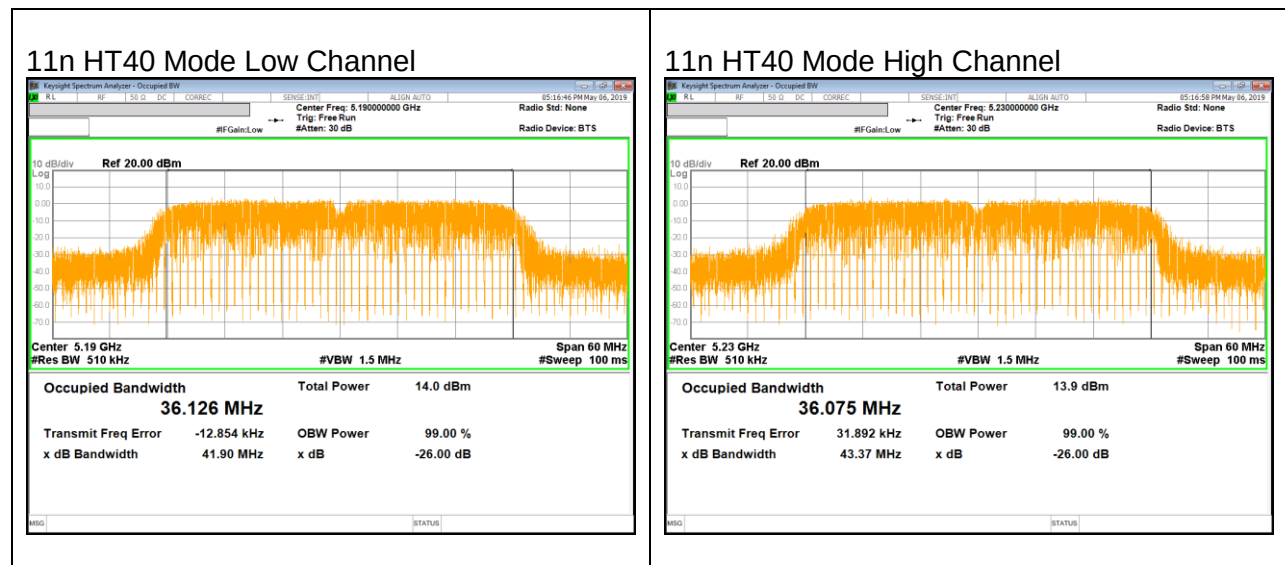


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

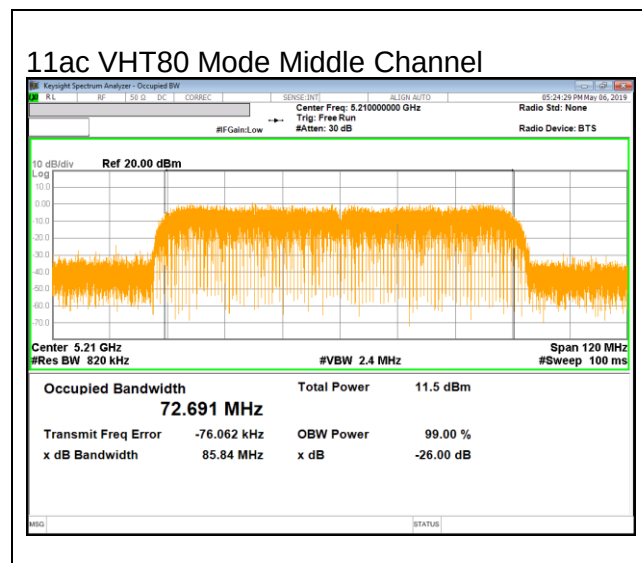


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

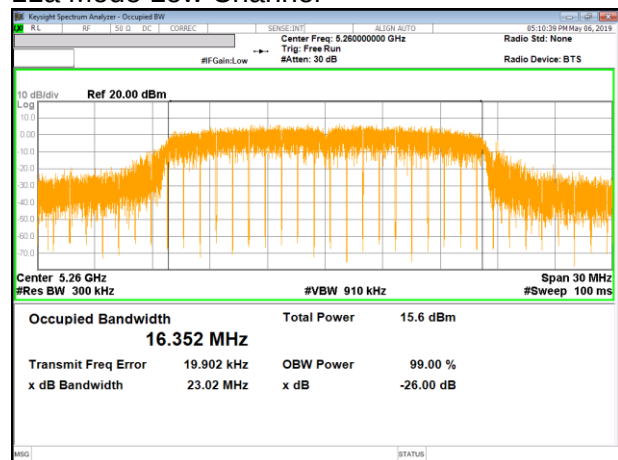


11a Mode Middle Channel

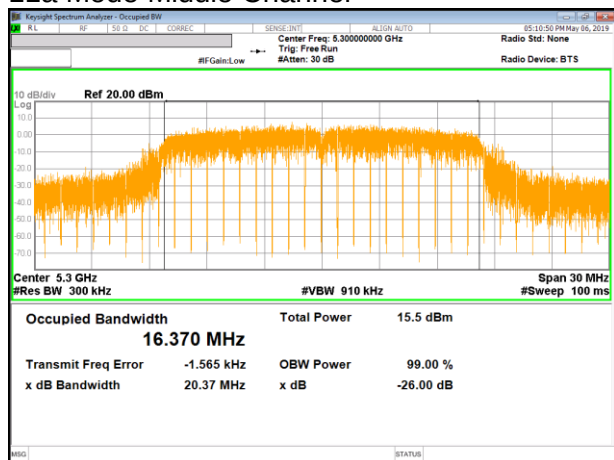


11a Mode High Channel

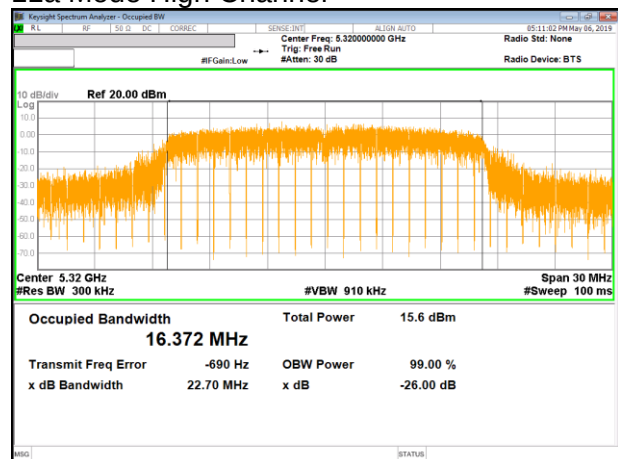


UNII 5.3 GHz IEEE 802.11n HT20 mode

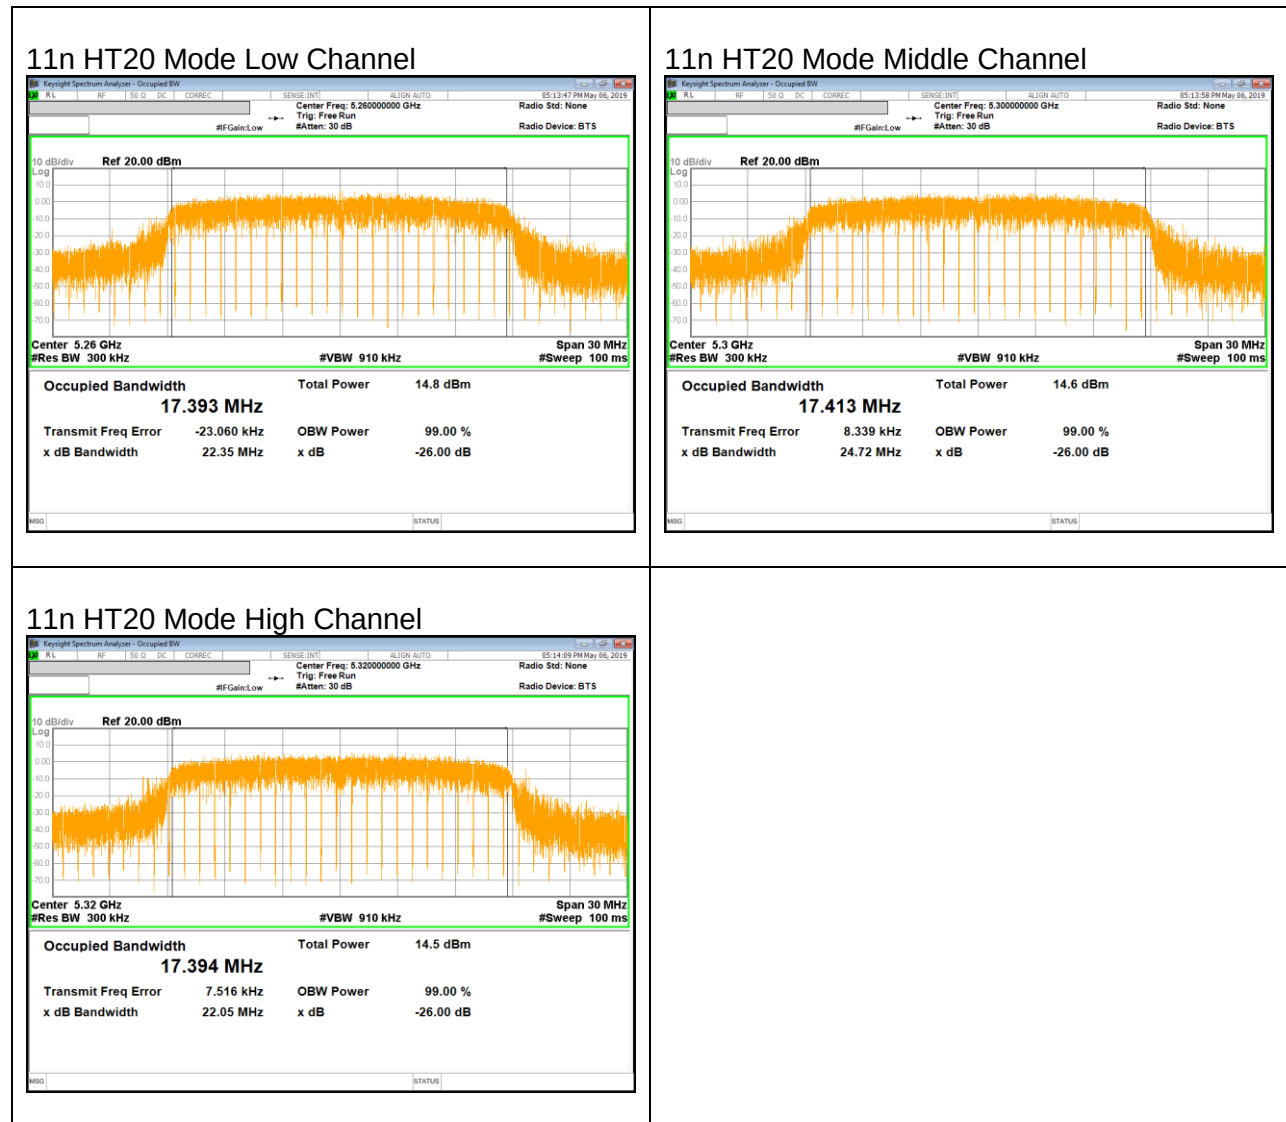


UNII 5.3 GHz IEEE 802.11n HT40 mode

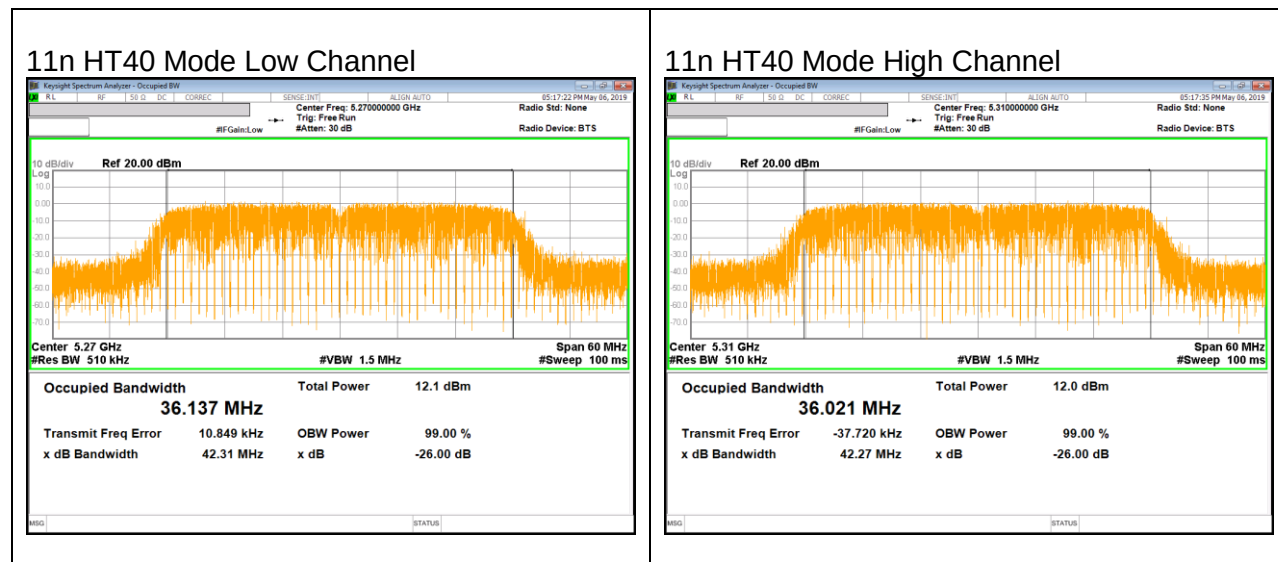


UNII 5.3 GHz IEEE 802.11ac VHT80 mode

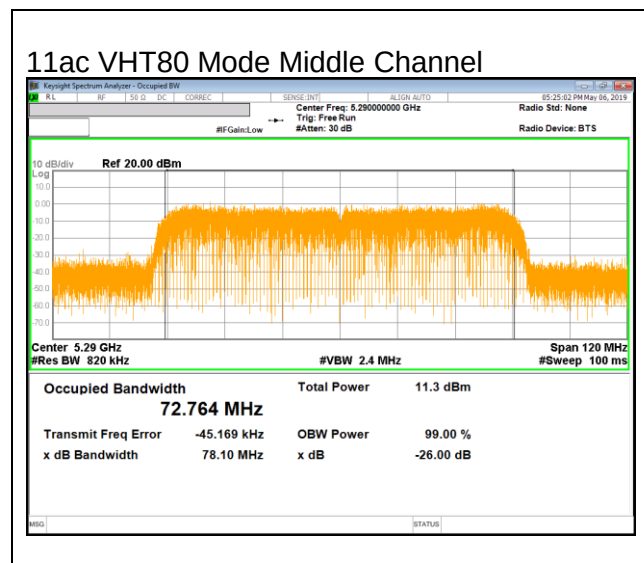

UNII 5.5 GHz IEEE 802.11a mode

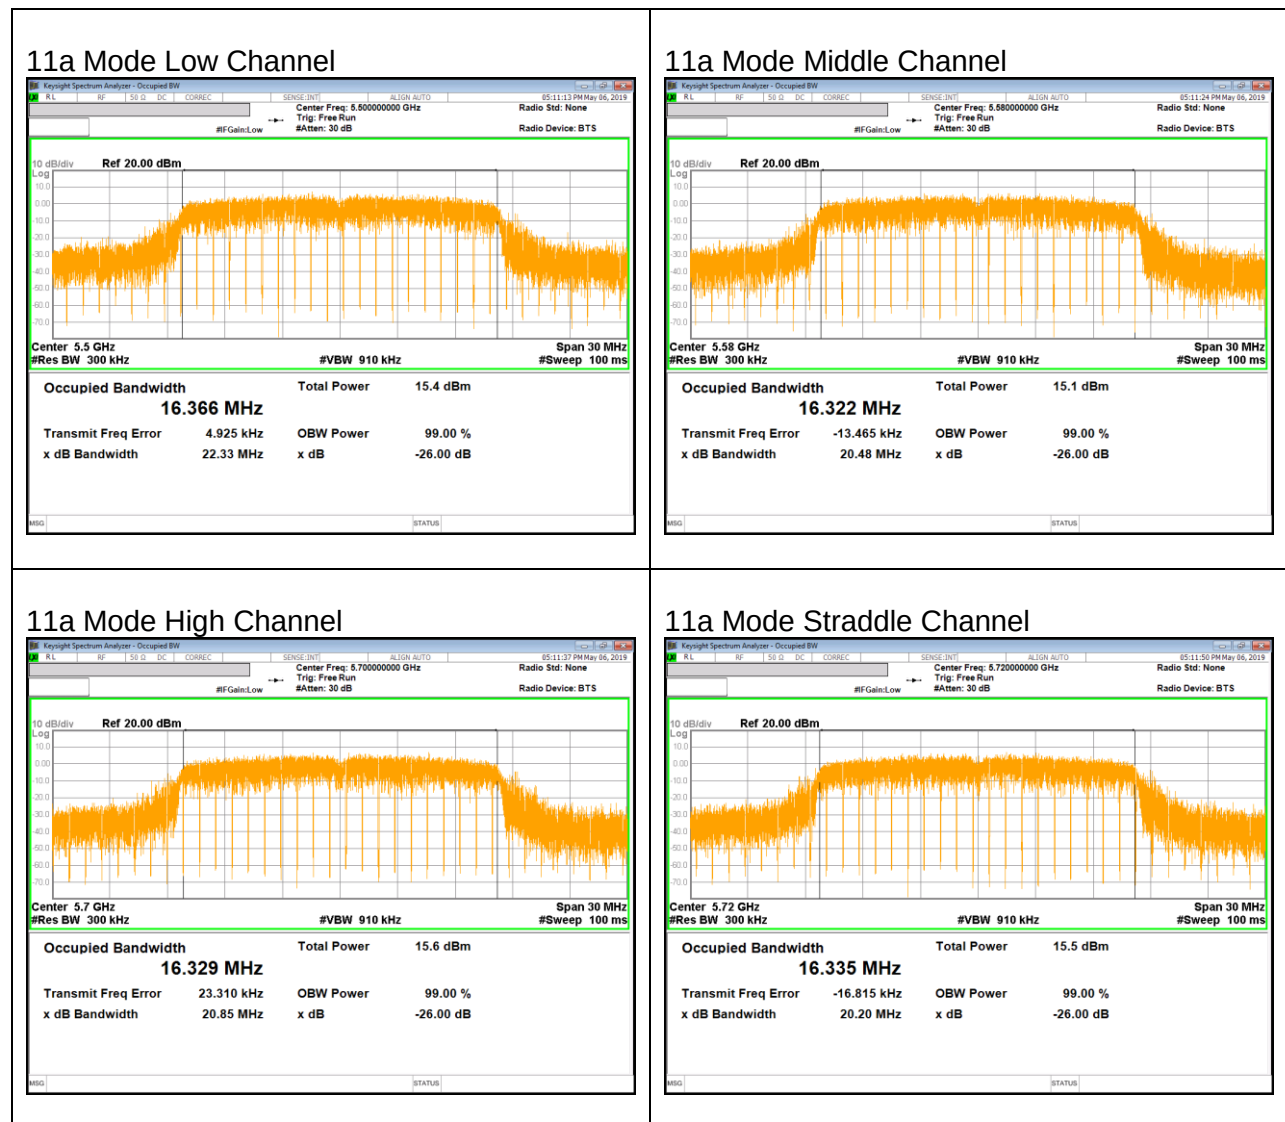

UNII 5.5 GHz IEEE 802.11n HT20 mode

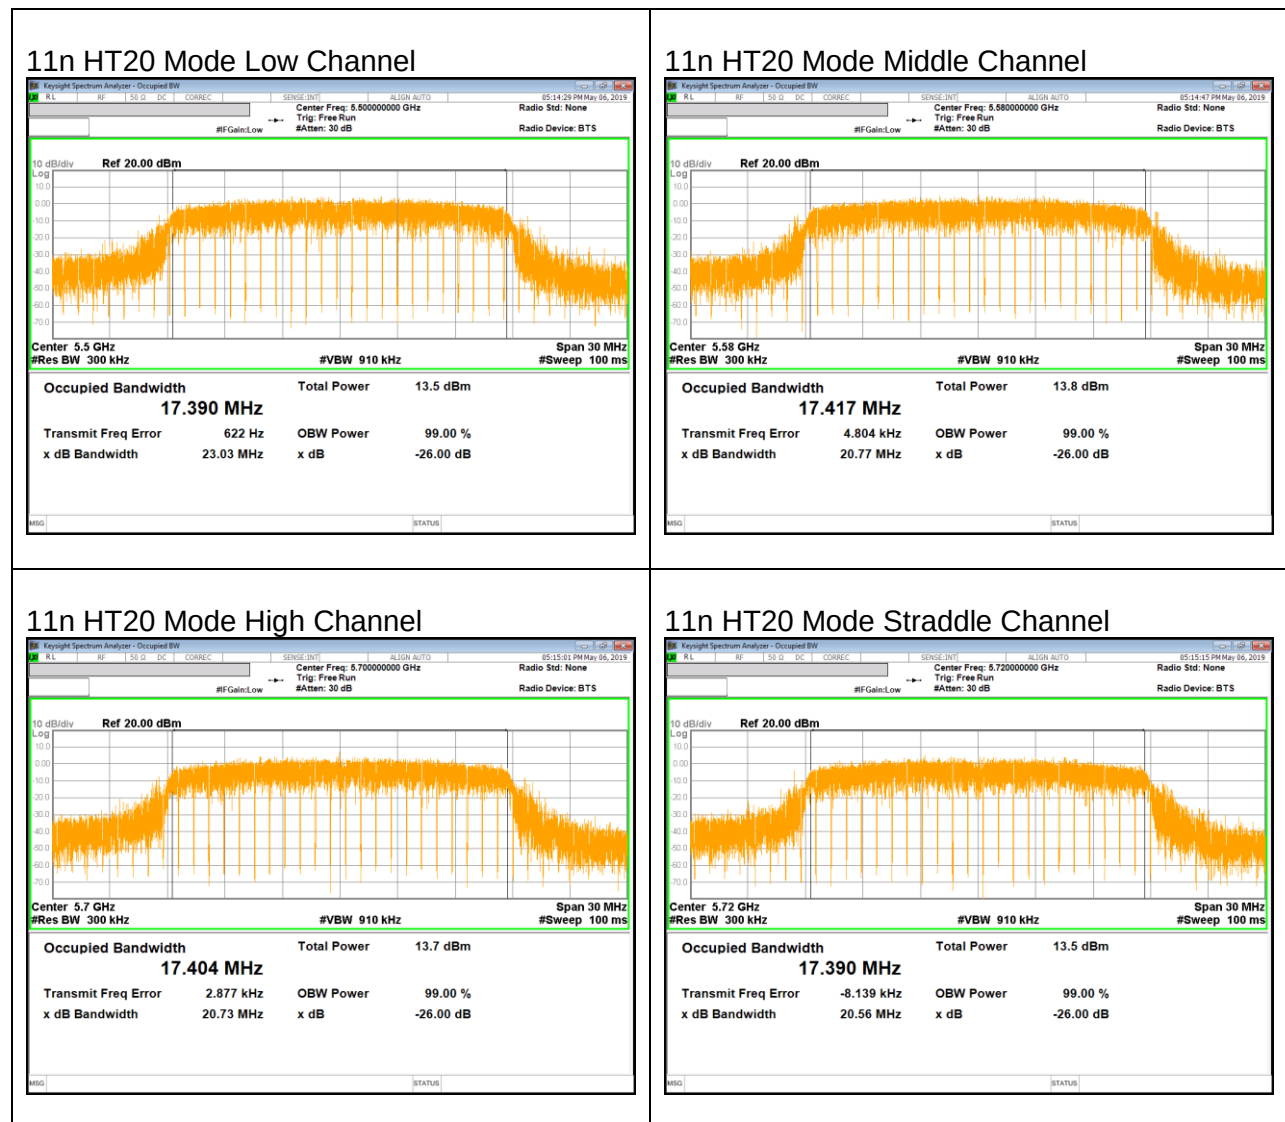

UNII 5.5 GHz IEEE 802.11n HT40 mode

