TEST REPORT

FCC LTE B2 Test for SM-A266U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2501-FC006

DATE OF ISSUE
January 15, 2025

Tested by
Jae Ryang Do

Technical Manager
Jong Seok Lee

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

The report shall not be (partly) reproduced except in full without approval of the laboratory.
HCT CO., LTD. 2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea Tel. +82 31 645 6300 Fax. +82 31 645 6401

HCT CO.,LTD.
2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.
HCT-RF-2501-FC006

DATE OF ISSUE
January 15, 2025

Additional Model
SM-A266U1, SM-S266V

Applicant	**SAMSUNG Electronics Co., Ltd.** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Product Name Model Name	Mobile Phone SM-A266U
Date of Test	November 22, 2024~ January 10, 2025
FCC ID	A3LSMA266U
Location of Test	■ Permanent Testing Lab ☐ On Site Testing (Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 24
Test Results	PASS

The report shall not be (partly) reproduced except in full without approval of the laboratory.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	January 15, 2025	Initial Release

Notice

Content
The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)
The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated. The test results have only been applied with the test methods required by the standard(s). The laboratory is not accredited for the test results marked *. Information provided by the applicant is marked **. Test results provided by external providers are marked ***.
When confirmation of authenticity of this test report is required, please contact www.hct.co.kr
The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

The report shall not be (partly) reproduced except in full without approval of the laboratory.

CONTENTS

1. GENERAL INFORMATION 5
1.1. MAXIMUM OUTPUT POWER 6
2. INTRODUCTION 8
2.1. DESCRIPTION OF EUT 8
2.2. MEASURING INSTRUMENT CALIBRATION 8
2.3. TEST FACILITY 8
3. DESCRIPTION OF TESTS 9
3.1 TEST PROCEDURE 9
3.2 RADIATED POWER 10
3.3 RADIATED SPURIOUS EMISSIONS 11
3.4 PEAK- TO- AVERAGE RATIO 12
3.5 OCCUPIED BANDWIDTH. 14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL 15
3.7 BAND EDGE 16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE 18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE 19
3.9 WORST CASE(RADIATED TEST) 20
3.10 WORST CASE(CONDUCTED TEST) 21
4. LIST OF TEST EQUIPMENT 22
5. MEASUREMENT UNCERTAINTY 23
6. SUMMARY OF TEST RESULTS 24
7. SAMPLE CALCULATION 25
8. TEST DATA(Main 2 ANT) 27
8.1 EQUIVALENT ISOTROPIC RADIATED POWER 27
8.2 RADIATED SPURIOUS EMISSIONS 30
8.3 PEAK-TO-AVERAGE RATIO 31
8.4 OCCUPIED BANDWIDTH 32
8.5 CONDUCTED SPURIOUS EMISSIONS 33
8.6 BAND EDGE 33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE 34
9. TEST DATA(Sub 2 ANT) 52
9.1 EQUIVALENT ISOTROPIC RADIATED POWER 52
9.2 RADIATED SPURIOUS EMISSIONS 55
9.3 PEAK-TO-AVERAGE RATIO 56
9.4 OCCUPIED BANDWIDTH 57
9.5 CONDUCTED SPURIOUS EMISSIONS 58
9.6 BAND EDGE 58
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE 59
10. TEST PLOTS(Main 2 ANT) 77
11. TEST PLOTS(Sub 2 ANT) 198
12. ANNEX A_ TEST SETUP PHOTO 319

The report shall not be (partly) reproduced except in full without approval of the laboratory.

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA266U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 24
EUT Type:	Mobile phone
Model(s):	SM-A266U
Additional Model(s)	SM-A266U1, SM-S266V
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	November 22, 2024~ January 10, 2025
Serial number:	Radiated : R3CXB07JAXN Conducted : R3CXB07HFYA

The report shall not be (partly) reproduced except in full without approval of the laboratory.

1.1. MAXIMUM OUTPUT POWER

Main 2 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.203	23.08
		1M10W7D	16QAM	0.173	22.38
		1M10W7D	64QAM	0.136	21.32
		1M10W7D	256QAM	0.066	18.20
LTE – Band2 (3)	1851.5 - 1908.5	2M72G7D	QPSK	0.204	23.09
		2M71W7D	16QAM	0.175	22.42
		2M71W7D	64QAM	0.135	21.30
		2M71W7D	256QAM	0.066	18.21
LTE – Band2 (5)	1852.5 - 1907.5	4M54G7D	QPSK	0.217	23.36
		4M50W7D	16QAM	0.185	22.68
		4M52W7D	64QAM	0.145	21.62
		4M53W7D	256QAM	0.071	18.50
LTE – Band2 (10)	1855.0 - 1905.0	9M00G7D	QPSK	0.222	23.46
		9M02W7D	16QAM	0.187	22.71
		9M01W7D	64QAM	0.145	21.62
		9M03W7D	256QAM	0.071	18.54
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.222	23.47
		13M5W7D	16QAM	0.191	22.82
		13M5W7D	64QAM	0.149	21.74
		13M5W7D	256QAM	0.073	18.63
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.223	23.48
		17M9W7D	16QAM	0.188	22.75
		17M9W7D	64QAM	0.146	21.64
		18M0W7D	256QAM	0.072	18.56

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Sub 2 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.129	21.10
		1M10W7D	16QAM	0.107	20.30
		1M10W7D	64QAM	0.084	19.22
		1M10W7D	256QAM	0.040	16.02
LTE – Band2 (3)	1851.5 - 1908.5	2M72G7D	QPSK	0.132	21.20
		2M71W7D	16QAM	0.108	20.33
		2M71W7D	64QAM	0.084	19.24
		2M72W7D	256QAM	0.041	16.14
LTE – Band2 (5)	1852.5 - 1907.5	4M53G7D	QPSK	0.116	20.65
		4M51W7D	16QAM	0.097	19.85
		4M52W7D	64QAM	0.075	18.77
		4M55W7D	256QAM	0.037	15.66
LTE – Band2 (10)	1855.0 - 1905.0	9M02G7D	QPSK	0.119	20.74
		9M01W7D	16QAM	0.096	19.84
		9M00W7D	64QAM	0.076	18.82
		9M02W7D	256QAM	0.037	15.67
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.116	20.64
		13M5W7D	16QAM	0.095	19.79
		13M5W7D	64QAM	0.074	18.69
		13M5W7D	256QAM	0.036	15.53
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.107	20.31
		17M9W7D	16QAM	0.091	19.60
		17M9W7D	64QAM	0.074	18.71
		17M9W7D	256QAM	0.036	15.62

The report shall not be (partly) reproduced except in full without approval of the laboratory.

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

Please refer to the [2G3G] Test Report.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.
The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
   The power is calculated by the following formula;

$$P_{d\ (dBm)} = Pg_{\ (dBm)} - \text{cable loss}_{\ (dB)} + \text{antenna gain}_{\ (dB)}$$

   Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.
3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
   These steps are repeated with the receiving antenna in both vertical and horizontal polarization.
   the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10^{th} harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
   The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
   The spurious emissions is calculated by the following formula;

$$\text{Result}_{(dBm)} = \text{Pg}_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

   Where: P_g is the generator output power into the substitution antenna.

   If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.4 PEAK- TO- AVERAGE RATIO

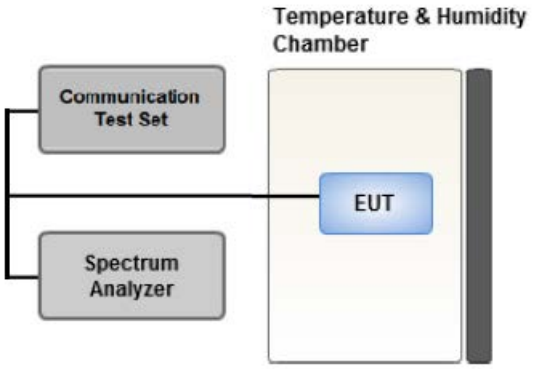

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
   .- for continuous transmissions, set to 1 ms,
   .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as as P_{Pk}.

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg}. Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk(dBm)} - P_{Avg(dBm)}$$ (P_{Avg} = Average Power + Duty cycle Factor)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW ≥ 3 × RBW.

1. Set the RBW ≥ OBW.
2. Set VBW ≥ 3 × RBW.
3. Set span ≥ 2 × OBW.
4. Sweep time ≥ 10 × (number of points in sweep) × (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to 2 × to 3 × the OBW.
2. Set RBW ≥ OBW.
3. Set VBW ≥ 3 × RBW.
4. Set number of measurement points in sweep ≥ 2 × span / RBW.
5. Sweep time:
   Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25 %.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.5 OCCUPIED BANDWIDTH.

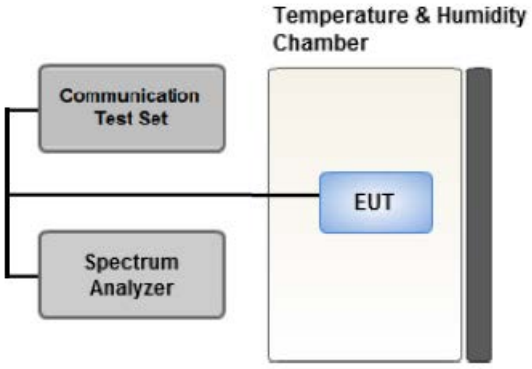

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.
The EUT makes a call to the communication simulator.
The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.
Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

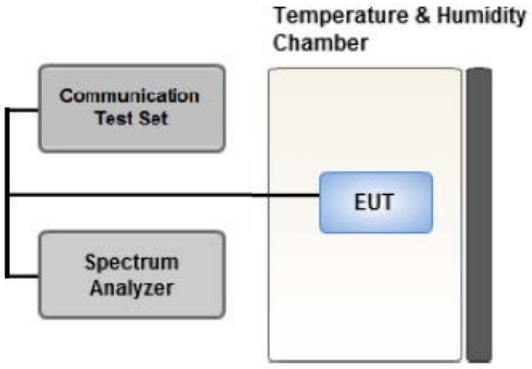

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW ≥ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep ≥ 2 x Span / RBW

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.7 BAND EDGE

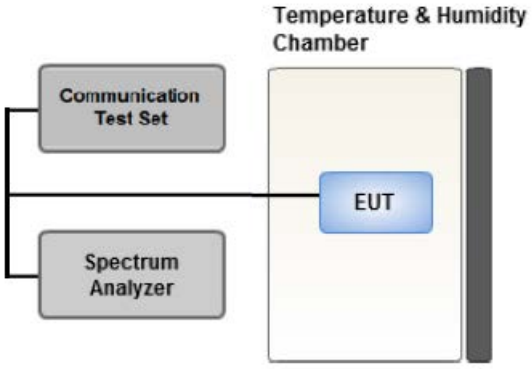

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. In
the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.
All measurements were done at 2 channels(low and high operational frequency range.)
The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by 10 log(1 MHz/ RB) or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

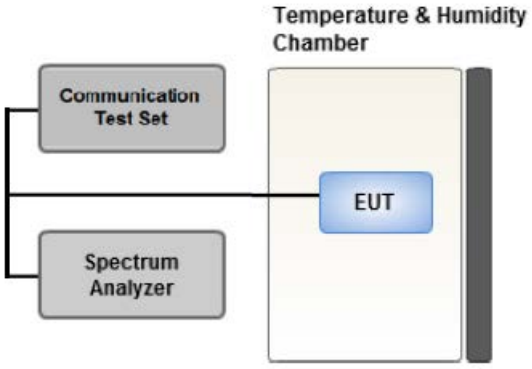

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

   The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

   .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

   .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

   Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

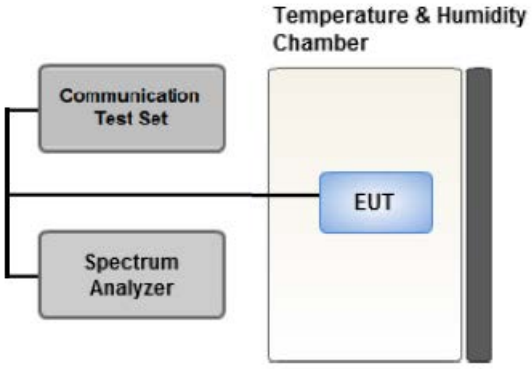

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

   The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

   .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

   .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

   Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
  Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)
  Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
  Mode : Stand alone, Simultaneous transmission scenarios
  Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case :20 MHz(Main 2 ANT), 3 MHz(Sub 2 ANT))
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-A266U & additional models were tested and the worst case results are reported.

(Worst case : SM-A266U)

[Main 2 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Y

[Sub 2 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Z

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-A266U & additional models were tested and the worst case results are reported.
(Worst case : SM-A266U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

The report shall not be (partly) reproduced except in full without approval of the laboratory.

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1 G HPF+LNA)	HCT CO., LTD.,	F2L2	12/12/2025	Annual
RF Switching System	Switch box(3 G HPF+LNA)	HCT CO., LTD.,	F2L3	12/12/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F2L5	12/12/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F2L14	12/12/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03197	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03201	11/28/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101733	09/19/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:
1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

The report shall not be (partly) reproduced except in full without approval of the laboratory.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (±kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, k=2)
Frequency stability	28 (Confidence level about 95 %, k=2)

Parameter	Expanded Uncertainty (±dB)
Block Edge	0.70 (Confidence level about 95 %, k=2)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, k=2)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, k=2)
Radiated Power	4.74 (Confidence level about 95 %, k=2)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, k=2)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, k=2)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, k=2)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, k=2)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, k=2)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	See Note1
Peak- to- Average Ratio	§ 24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

The report shall not be (partly) reproduced except in full without approval of the laboratory.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
2) During the test, the turn table is rotated until the maximum signal is found.
3) Record the field strength meter's level.
4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
2) During the test, the turn table is rotated until the maximum signal is found.
3) Record the field strength meter's level.
4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8. TEST DATA(Main 2 ANT)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1850.7	LTE B2/ 1.4 MHz	QPSK	-20.31	14.59	10.15	2.07	V	< 2.00	0.185	22.67	1	5
		16-QAM	-21.03	13.87	10.15	2.07	V		0.157	21.95		
		64-QAM	-22.16	12.74	10.15	2.07	V		0.121	20.82		
		256-QAM	-25.26	9.64	10.15	2.07	V		0.059	17.72		
1880.0		QPSK	-20.20	15.17	10.11	2.21	V		0.203	23.07	1	0
		16-QAM	-20.89	14.48	10.11	2.21	V		0.173	22.38		
		64-QAM	-21.98	13.39	10.11	2.21	V		0.135	21.29		
		256-QAM	-25.11	10.26	10.11	2.21	V		0.066	18.16		
1909.3		QPSK	-20.26	15.22	10.03	2.17	V		0.203	23.08	1	0
		16-QAM	-20.97	14.51	10.03	2.17	V		0.173	22.37		
		64-QAM	-22.02	13.46	10.03	2.17	V		0.136	21.32		
		256-QAM	-25.14	10.34	10.03	2.17	V		0.066	18.20		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1851.5	LTE B2/ 3 MHz	QPSK	-20.29	14.61	10.15	2.07	V	< 2.00	0.186	22.69	1	14
		16-QAM	-20.95	13.95	10.15	2.07	V		0.160	22.03		
		64-QAM	-22.03	12.87	10.15	2.07	V		0.125	20.95		
		256-QAM	-25.17	9.73	10.15	2.07	V		0.060	17.81		
1880.0		QPSK	-20.40	14.97	10.11	2.21	V		0.194	22.87	1	0
		16-QAM	-21.08	14.29	10.11	2.21	V		0.166	22.19		
		64-QAM	-22.23	13.14	10.11	2.21	V		0.127	21.04		
		256-QAM	-25.33	10.04	10.11	2.21	V		0.062	17.94		
1908.5		QPSK	-20.25	15.23	10.03	2.17	V		0.204	23.09	1	0
		16-QAM	-20.92	14.56	10.03	2.17	V		0.175	22.42		
		64-QAM	-22.04	13.44	10.03	2.17	V		0.135	21.30		
		256-QAM	-25.13	10.35	10.03	2.17	V		0.066	18.21		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1852.5	LTE B2/ 5 MHz	QPSK	-20.10	14.90	10.15	2.08	V	< 2.00	0.198	22.97	1	24
		16-QAM	-20.84	14.16	10.15	2.08	V		0.167	22.23		
		64-QAM	-21.97	13.03	10.15	2.08	V		0.129	21.10		
		256-QAM	-25.08	9.92	10.15	2.08	V		0.063	17.99		
1880.0		QPSK	-20.34	15.03	10.11	2.21	V		0.196	22.93	1	0
		16-QAM	-21.04	14.33	10.11	2.21	V		0.167	22.23		
		64-QAM	-22.10	13.27	10.11	2.21	V		0.131	21.17		
		256-QAM	-25.15	10.22	10.11	2.21	V		0.065	18.12		
1907.5		QPSK	-19.98	15.50	10.03	2.17	V		0.217	23.36	1	0
		16-QAM	-20.66	14.82	10.03	2.17	V		0.185	22.68		
		64-QAM	-21.72	13.76	10.03	2.17	V		0.145	21.62		
		256-QAM	-24.84	10.64	10.03	2.17	V		0.071	18.50		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1855.0	LTE B2/ 10 MHz	QPSK	-20.13	14.87	10.15	2.08	V	< 2.00	0.197	22.94	1	49
		16-QAM	-20.82	14.18	10.15	2.08	V		0.168	22.25		
		64-QAM	-21.89	13.11	10.15	2.08	V		0.131	21.18		
		256-QAM	-24.99	10.01	10.15	2.08	V		0.064	18.08		
1880.0		QPSK	-20.08	15.29	10.11	2.21	V		0.208	23.19	1	0
		16-QAM	-20.76	14.61	10.11	2.21	V		0.178	22.51		
		64-QAM	-21.87	13.50	10.11	2.21	V		0.138	21.40		
		256-QAM	-24.94	10.43	10.11	2.21	V		0.068	18.33		
1905.0		QPSK	-19.90	15.60	10.05	2.19	V		0.222	23.46	1	0
		16-QAM	-20.65	14.85	10.05	2.19	V		0.187	22.71		
		64-QAM	-21.74	13.76	10.05	2.19	V		0.145	21.62		
		256-QAM	-24.82	10.68	10.05	2.19	V		0.071	18.54		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1857.5	LTE B2/ 15 MHz	QPSK	-20.01	15.11	10.14	2.10	V	< 2.00	0.207	23.15	1	74
		16-QAM	-20.74	14.38	10.14	2.10	V		0.175	22.42		
		64-QAM	-21.85	13.27	10.14	2.10	V		0.135	21.31		
		256-QAM	-24.94	10.18	10.14	2.10	V		0.066	18.22		
1880.0		QPSK	-20.23	15.14	10.11	2.21	V		0.201	23.04	1	0
		16-QAM	-20.90	14.47	10.11	2.21	V		0.173	22.37		
		64-QAM	-21.99	13.38	10.11	2.21	V		0.134	21.28		
		256-QAM	-25.11	10.26	10.11	2.21	V		0.066	18.16		
1902.5		QPSK	-19.89	15.61	10.05	2.19	V		0.222	23.47	1	0
		16-QAM	-20.54	14.96	10.05	2.19	V		0.191	22.82		
		64-QAM	-21.62	13.88	10.05	2.19	V		0.149	21.74		
		256-QAM	-24.73	10.77	10.05	2.19	V		0.073	18.63		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1860.0	LTE B2/ 20 MHz	QPSK	-20.14	14.98	10.14	2.10	V	< 2.00	0.200	23.02	1	99
		16-QAM	-20.83	14.29	10.14	2.10	V		0.171	22.33		
		64-QAM	-21.91	13.21	10.14	2.10	V		0.133	21.25		
		256-QAM	-25.05	10.07	10.14	2.10	V		0.065	18.11		
1880.0		QPSK	-20.20	15.17	10.11	2.21	V		0.203	23.07	1	0
		16-QAM	-20.93	14.44	10.11	2.21	V		0.171	22.34		
		64-QAM	-22.05	13.32	10.11	2.21	V		0.132	21.22		
		256-QAM	-25.14	10.23	10.11	2.21	V		0.065	18.13		
1900.0		QPSK	-19.89	15.60	10.08	2.20	V		0.223	23.48	1	0
		16-QAM	-20.62	14.87	10.08	2.20	V		0.188	22.75		
		64-QAM	-21.73	13.76	10.08	2.20	V		0.146	21.64		
		256-QAM	-24.81	10.68	10.08	2.20	V		0.072	18.56		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8.2 RADIATED SPURIOUS EMISSIONS

▣ MODE: LTE B2

▣ MODULATION SIGNAL: 20 MHz QPSK

▣ DISTANCE: 3 meters

▣ LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
18700 (1860.0)	3 720.00	-54.87	11.77	-62.13	3.13	H	-53.49	1	99
	5 580.00	-56.27	12.08	-57.81	3.91	H	-49.64		
	7 440.00	-49.05	11.22	-45.00	4.58	H	-38.36		
18900 (1880.0)	3 760.00	-53.99	11.61	-60.48	3.12	H	-51.99	1	0
	5 640.00	-56.43	12.03	-57.49	3.92	H	-49.38		
	7 520.00	-50.17	11.49	-46.48	4.61	H	-39.60		
19100 (1900.0)	3 800.00	-54.40	11.39	-60.75	3.21	H	-52.57	1	0
	5 700.00	-55.48	11.92	-56.48	4.02	H	-48.58		
	7 600.00	-48.66	11.57	-44.68	4.64	H	-37.75		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.56
			16-QAM			6.31
			64-QAM			6.61
			256-QAM			6.44
	3 MHz		QPSK	15		5.67
			16-QAM			6.31
			64-QAM			6.57
			256-QAM			6.51
	5 MHz		QPSK	25		5.63
			16-QAM			6.34
			64-QAM			6.59
			256-QAM			6.54
	10 MHz		QPSK	50		5.76
			16-QAM			6.37
			64-QAM			6.61
			256-QAM			6.55
	15 MHz		QPSK	75		5.64
			16-QAM			6.34
			64-QAM			6.60
			256-QAM			6.58
	20 MHz		QPSK	100		5.68
			16-QAM			6.40
			64-QAM			6.64
			256-QAM			6.64

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 78~ 101.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0985
			16-QAM			1.0968
			64-QAM			1.0968
			256-QAM			1.0959
	3 MHz		QPSK	15		2.7207
			16-QAM			2.7073
			64-QAM			2.7049
			256-QAM			2.7130
	5 MHz		QPSK	25		4.5352
			16-QAM			4.5032
			64-QAM			4.5199
			256-QAM			4.5338
	10 MHz		QPSK	50		8.9982
			16-QAM			9.0228
			64-QAM			9.0054
			256-QAM			9.0331
	15 MHz		QPSK	75		13.487
			16-QAM			13.488
			64-QAM			13.477
			256-QAM			13.468
	20 MHz		QPSK	100		18.021
			16-QAM			17.912
			64-QAM			17.923
			256-QAM			17.949

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 102 ~ 125.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	2.6322	27.976	-67.741	-39.765	-13.00
		1880.0	3.1307	27.976	-68.337	-40.361	
		1909.3	6.2313	28.591	-68.342	-39.751	
	3	1851.5	3.1805	27.976	-68.116	-40.140	
		1880.0	2.7219	27.976	-68.285	-40.309	
		1908.5	9.9302	28.591	-67.660	-39.069	
	5	1852.5	3.7089	27.976	-67.997	-40.021	
		1880.0	3.2503	27.976	-67.155	-39.179	
		1907.5	3.7089	27.976	-68.604	-40.628	
	10	1855.0	3.1905	27.976	-67.646	-39.670	
		1880.0	6.9691	28.591	-67.896	-39.305	
		1905.0	7.2483	28.591	-68.109	-39.518	
	15	1857.5	3.6890	27.976	-67.512	-39.536	
		1880.0	6.3410	28.591	-68.154	-39.563	
		1902.5	3.7289	27.976	-68.302	-40.326	
	20	1860.0	3.0310	27.976	-68.198	-40.222	
		1880.0	3.7189	27.976	-66.621	-38.645	
		1900.0	2.7319	27.976	-67.591	-39.615	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 126~ 161.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 162 ~ 197.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1850 700 001	0.0	0.000 000	0.000
100 %		-30	1850 700 004	2.7	0.000 000	0.001
100 %		-20	1850 700 003	2.2	0.000 000	0.001
100 %		-10	1850 700 004	2.4	0.000 000	0.001
100 %		0	1850 700 003	1.9	0.000 000	0.001
100 %		+10	1850 700 003	1.7	0.000 000	0.001
100 %		+30	1850 700 003	1.8	0.000 000	0.001
100 %		+40	1850 700 004	2.8	0.000 000	0.002
100 %		+50	1850 700 003	2.1	0.000 000	0.001
Batt. Endpoint	3.400	+20	1850 700 003	2.0	0.000 000	0.001

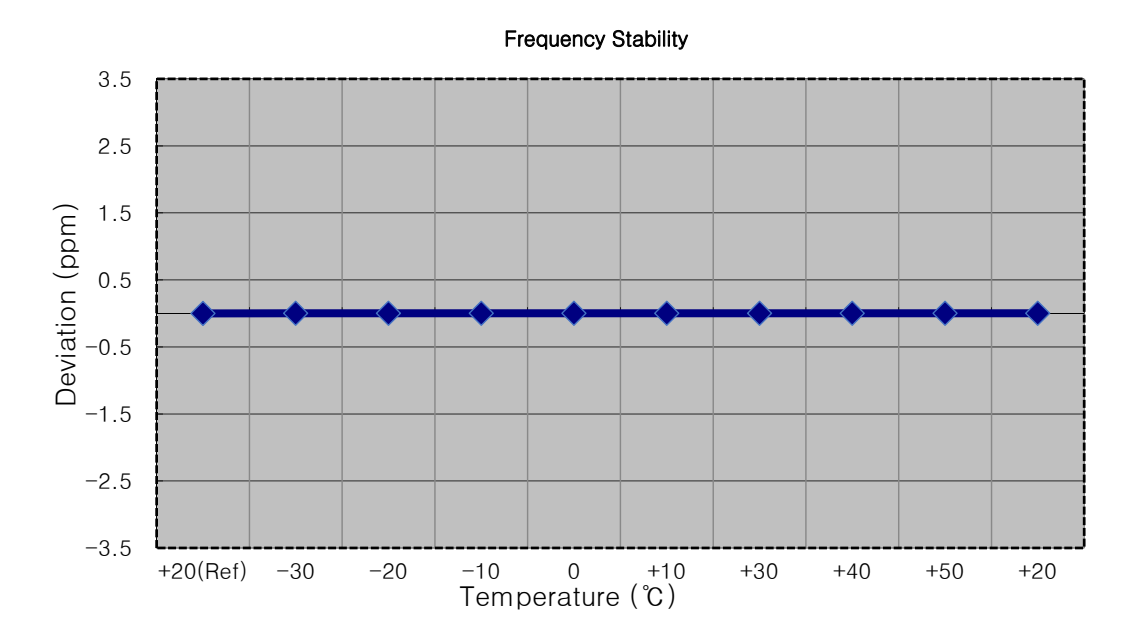

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1851,500,000 Hz

▣ CHANNEL: 18615 (3 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1851 500 005	0.0	0.000 000	0.000
100 %		-30	1851 500 006	1.7	0.000 000	0.001
100 %		-20	1851 500 008	3.1	0.000 000	0.002
100 %		-10	1851 500 007	2.5	0.000 000	0.001
100 %		0	1851 500 006	1.5	0.000 000	0.001
100 %		+10	1851 500 008	3.6	0.000 000	0.002
100 %		+30	1851 500 007	2.1	0.000 000	0.001
100 %		+40	1851 500 007	2.3	0.000 000	0.001
100 %		+50	1851 500 007	2.2	0.000 000	0.001
Batt. Endpoint	3.400	+20	1851 500 008	3.0	0.000 000	0.002

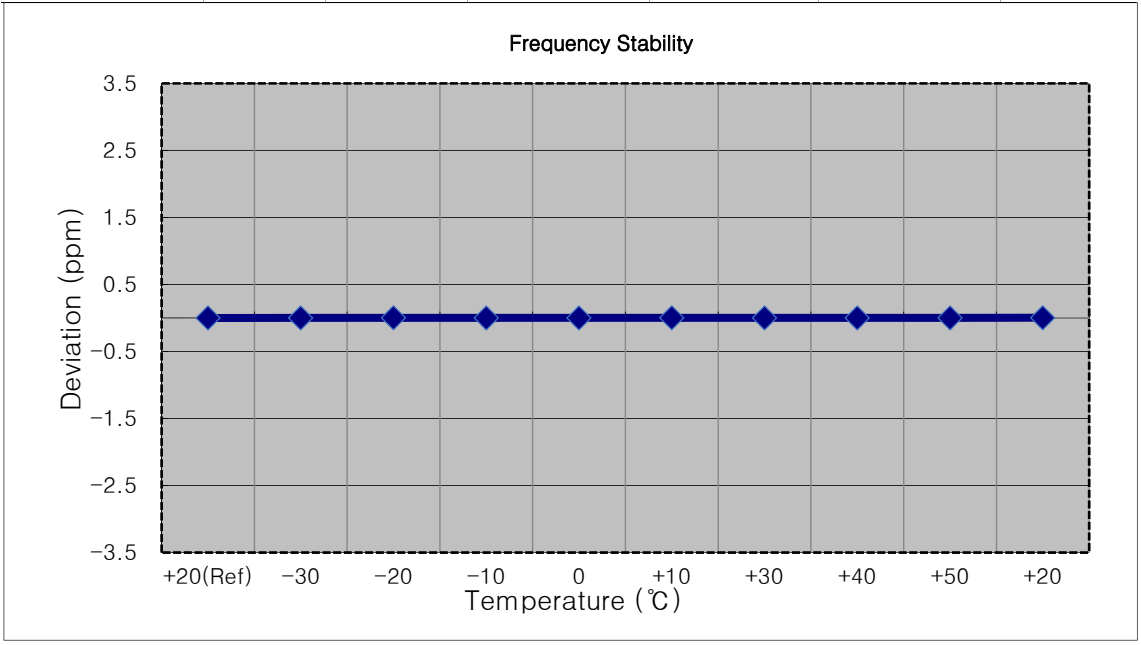

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1852,500,000 Hz

▣ CHANNEL: 18625 (5 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1852 500 002	0.0	0.000 000	0.000
100 %		-30	1852 500 004	2.1	0.000 000	0.001
100 %		-20	1852 500 005	3.6	0.000 000	0.002
100 %		-10	1852 500 004	1.8	0.000 000	0.001
100 %		0	1852 500 004	2.5	0.000 000	0.001
100 %		+10	1852 500 005	2.8	0.000 000	0.002
100 %		+30	1852 500 005	3.0	0.000 000	0.002
100 %		+40	1852 500 005	2.7	0.000 000	0.001
100 %		+50	1852 500 005	2.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1852 500 006	3.7	0.000 000	0.002

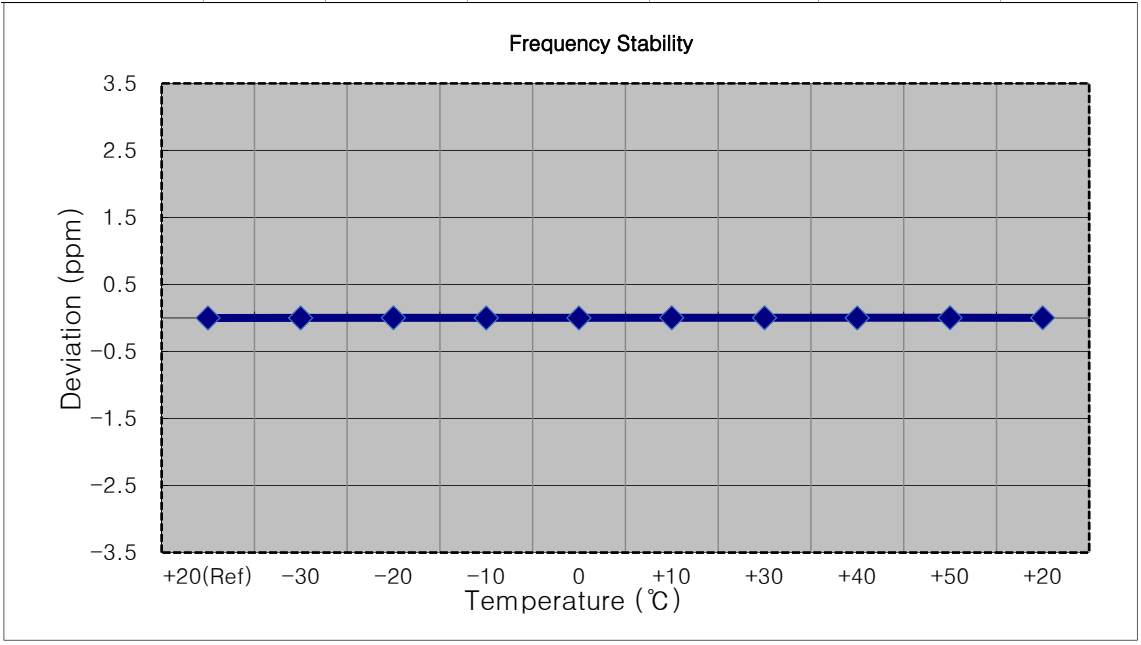

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1855,000,000 Hz

▣ CHANNEL: 18650 (10 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1855 000 002	0.0	0.000 000	0.000
100 %		-30	1855 000 005	3.0	0.000 000	0.002
100 %		-20	1855 000 005	3.6	0.000 000	0.002
100 %		-10	1855 000 006	3.7	0.000 000	0.002
100 %		0	1855 000 004	2.1	0.000 000	0.001
100 %		+10	1855 000 004	2.0	0.000 000	0.001
100 %		+30	1855 000 005	3.2	0.000 000	0.002
100 %		+40	1855 000 004	2.6	0.000 000	0.001
100 %		+50	1855 000 005	2.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1855 000 004	2.2	0.000 000	0.001

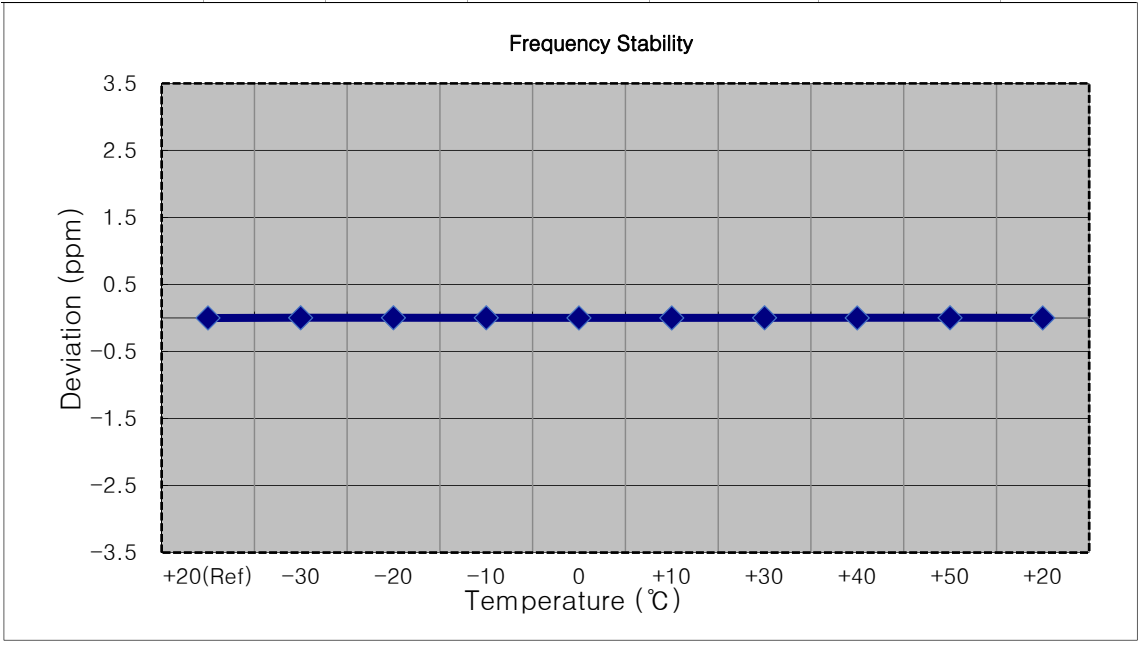

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1857,500,000 Hz

▣ CHANNEL: 18675 (15 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1857 500 003	0.0	0.000 000	0.000
100 %		-30	1857 500 005	2.2	0.000 000	0.001
100 %		-20	1857 500 005	2.6	0.000 000	0.001
100 %		-10	1857 500 005	2.2	0.000 000	0.001
100 %		0	1857 500 006	3.3	0.000 000	0.002
100 %		+10	1857 500 005	1.9	0.000 000	0.001
100 %		+30	1857 500 005	2.8	0.000 000	0.002
100 %		+40	1857 500 005	2.6	0.000 000	0.001
100 %		+50	1857 500 006	3.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1857 500 005	2.3	0.000 000	0.001

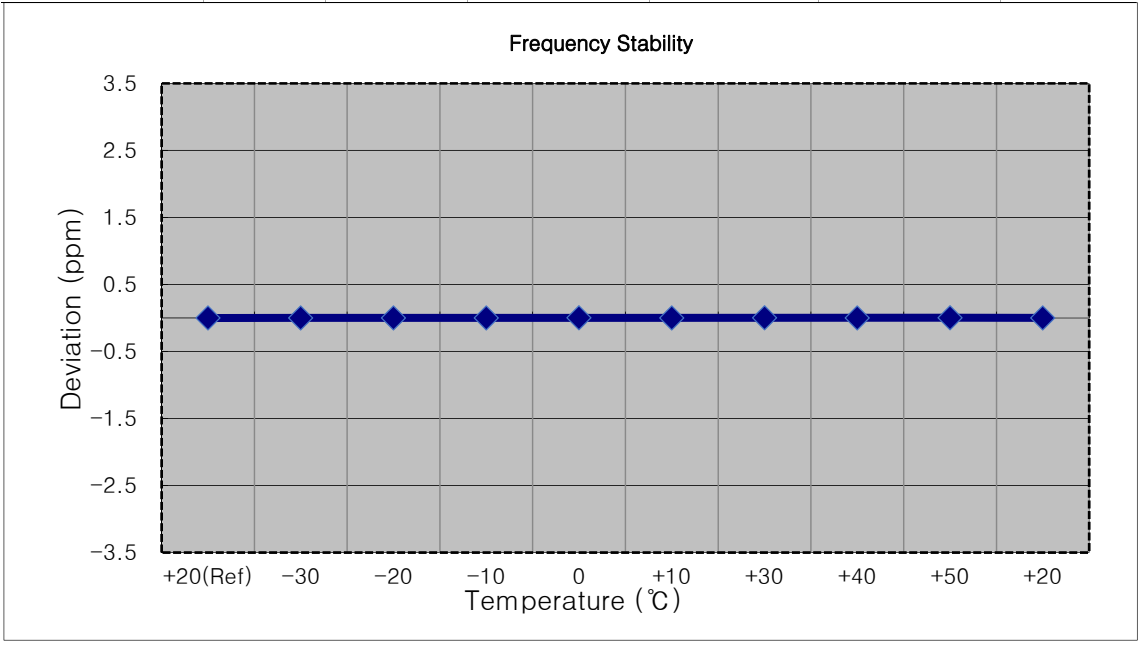

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1860,000,000 Hz

▣ CHANNEL: 18700 (20 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1860 000 003	0.0	0.000 000	0.000
100 %		-30	1860 000 005	2.7	0.000 000	0.001
100 %		-20	1860 000 004	1.7	0.000 000	0.001
100 %		-10	1860 000 004	1.5	0.000 000	0.001
100 %		0	1860 000 005	2.3	0.000 000	0.001
100 %		+10	1860 000 005	2.0	0.000 000	0.001
100 %		+30	1860 000 004	1.6	0.000 000	0.001
100 %		+40	1860 000 006	3.0	0.000 000	0.002
100 %		+50	1860 000 005	2.2	0.000 000	0.001
Batt. Endpoint	3.400	+20	1860 000 005	2.1	0.000 000	0.001

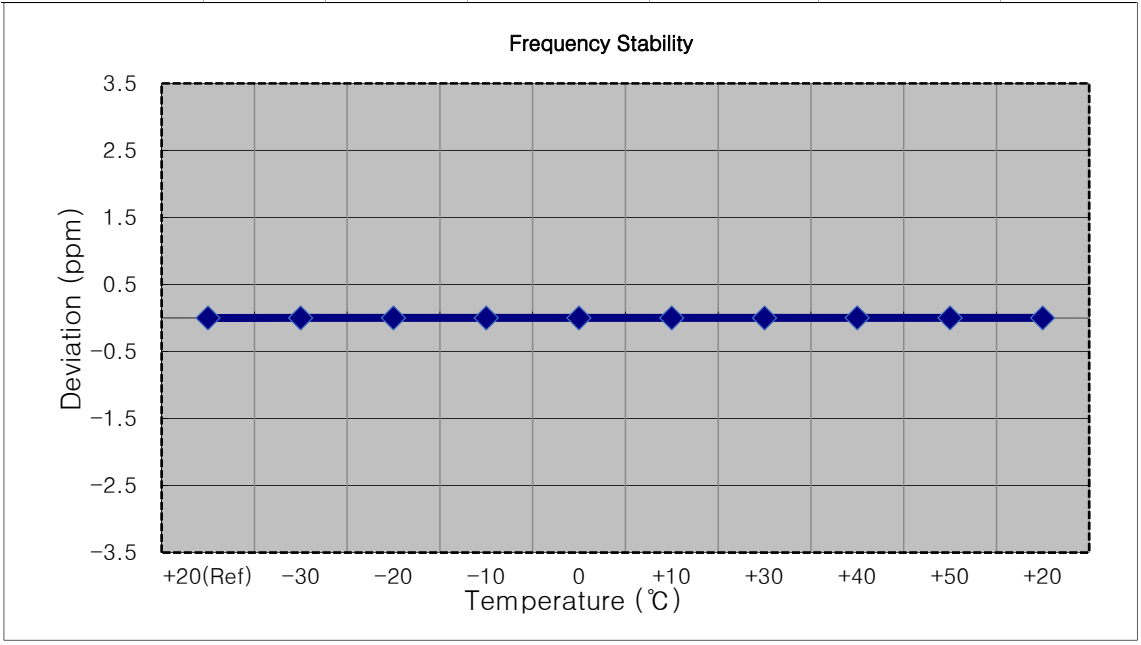

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (1.4 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1880 000 004	2.6	0.000 000	0.001
100 %		-20	1880 000 005	3.3	0.000 000	0.002
100 %		-10	1880 000 004	2.6	0.000 000	0.001
100 %		0	1880 000 004	2.2	0.000 000	0.001
100 %		+10	1880 000 004	2.9	0.000 000	0.002
100 %		+30	1880 000 003	2.1	0.000 000	0.001
100 %		+40	1880 000 004	2.2	0.000 000	0.001
100 %		+50	1880 000 004	2.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 005	3.4	0.000 000	0.002

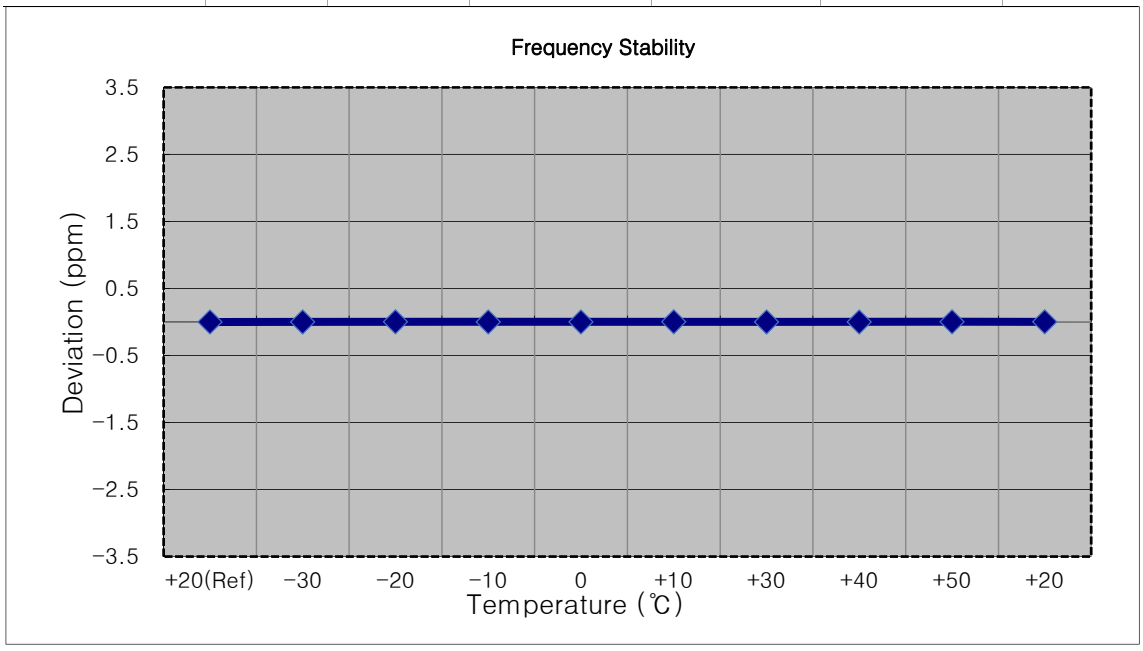

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (3 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(℃)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 006	2.7	0.000 000	0.001
100 %		-20	1880 000 005	2.3	0.000 000	0.001
100 %		-10	1880 000 006	2.9	0.000 000	0.002
100 %		0	1880 000 006	2.9	0.000 000	0.002
100 %		+10	1880 000 005	2.6	0.000 000	0.001
100 %		+30	1880 000 007	4.1	0.000 000	0.002
100 %		+40	1880 000 006	3.0	0.000 000	0.002
100 %		+50	1880 000 005	2.3	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 005	2.4	0.000 000	0.001

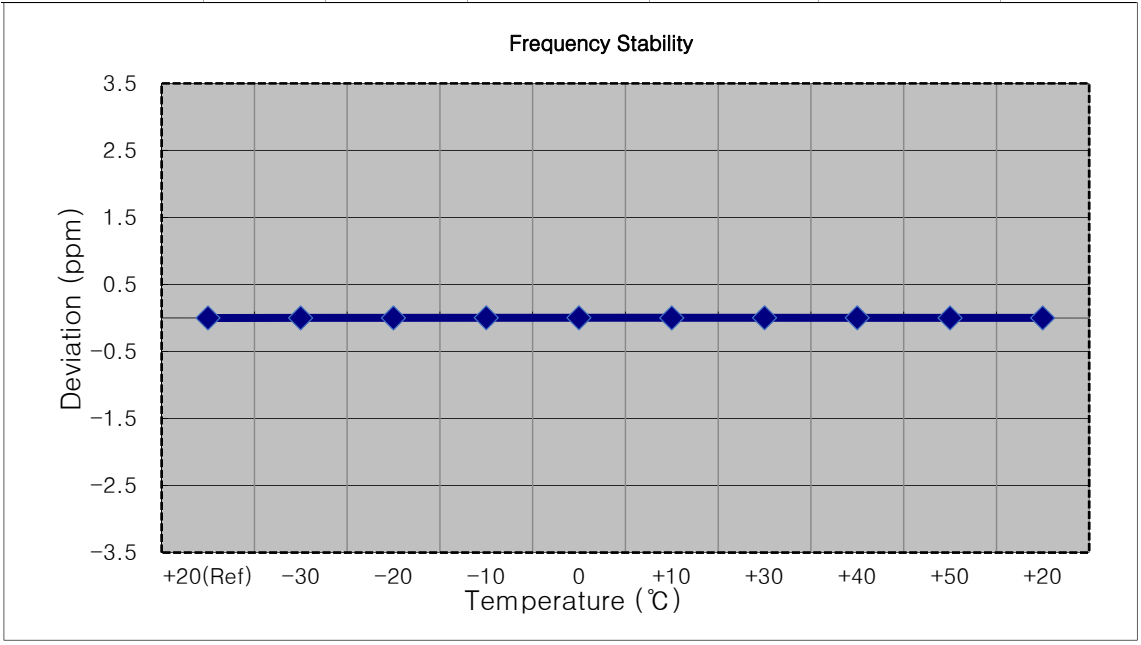

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (5 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 006	2.3	0.000 000	0.001
100 %		-20	1880 000 007	3.0	0.000 000	0.002
100 %		-10	1880 000 007	2.9	0.000 000	0.002
100 %		0	1880 000 007	2.9	0.000 000	0.002
100 %		+10	1880 000 006	2.1	0.000 000	0.001
100 %		+30	1880 000 007	3.0	0.000 000	0.002
100 %		+40	1880 000 008	3.9	0.000 000	0.002
100 %		+50	1880 000 006	2.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 008	4.3	0.000 000	0.002

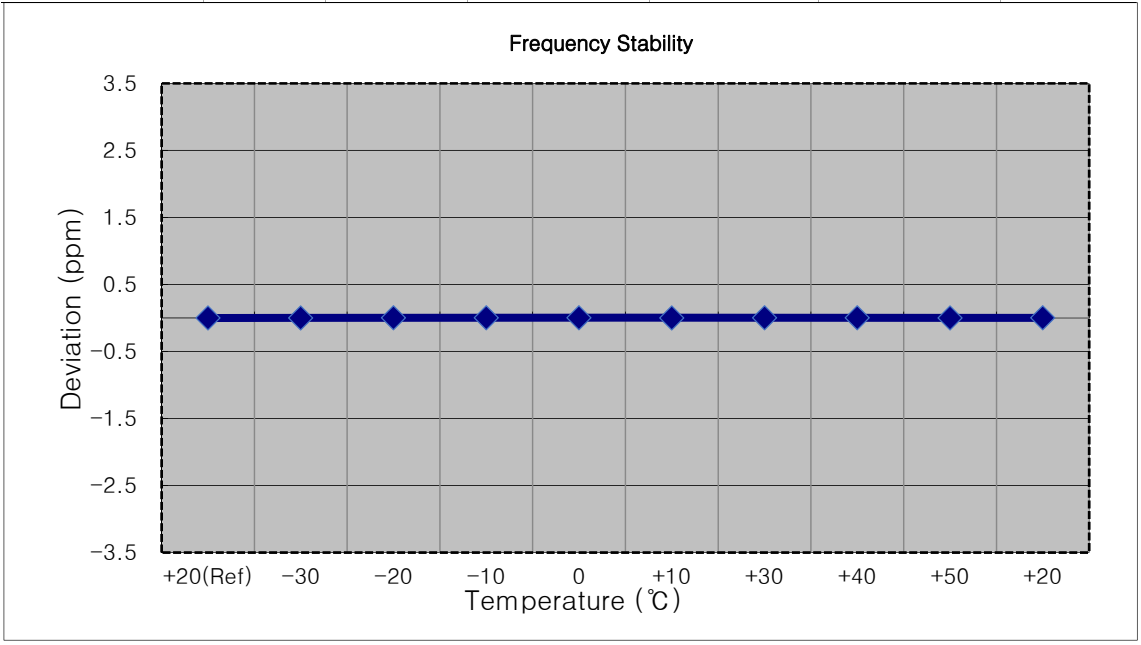

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (10 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1880 000 000	2.1	0.000 000	0.001
100 %		-20	1880 000 001	2.8	0.000 000	0.001
100 %		-10	1880 000 001	3.1	0.000 000	0.002
100 %		0	1880 000 000	2.4	0.000 000	0.001
100 %		+10	1880 000 000	2.3	0.000 000	0.001
100 %		+30	1880 000 002	3.6	0.000 000	0.002
100 %		+40	1880 000 002	3.7	0.000 000	0.002
100 %		+50	1880 000 000	2.4	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 002	3.9	0.000 000	0.002

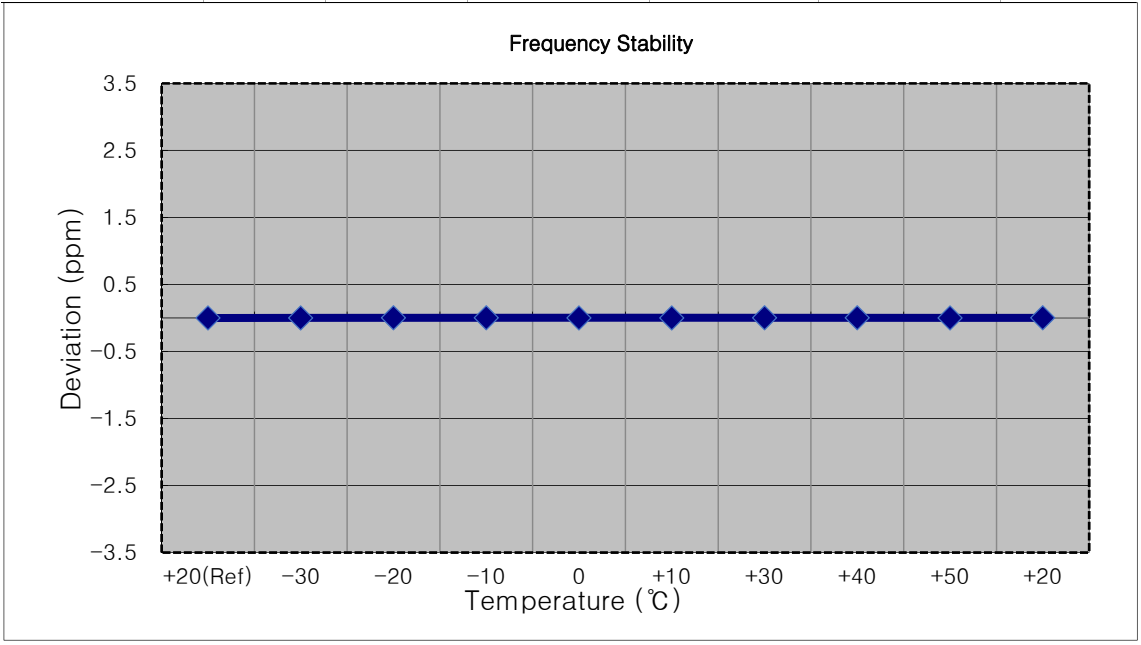

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (15 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1880 000 004	2.2	0.000 000	0.001
100 %		-20	1880 000 004	2.2	0.000 000	0.001
100 %		-10	1880 000 004	2.3	0.000 000	0.001
100 %		0	1880 000 005	3.6	0.000 000	0.002
100 %		+10	1880 000 004	2.9	0.000 000	0.002
100 %		+30	1880 000 003	2.0	0.000 000	0.001
100 %		+40	1880 000 004	2.9	0.000 000	0.002
100 %		+50	1880 000 004	2.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 003	1.7	0.000 000	0.001

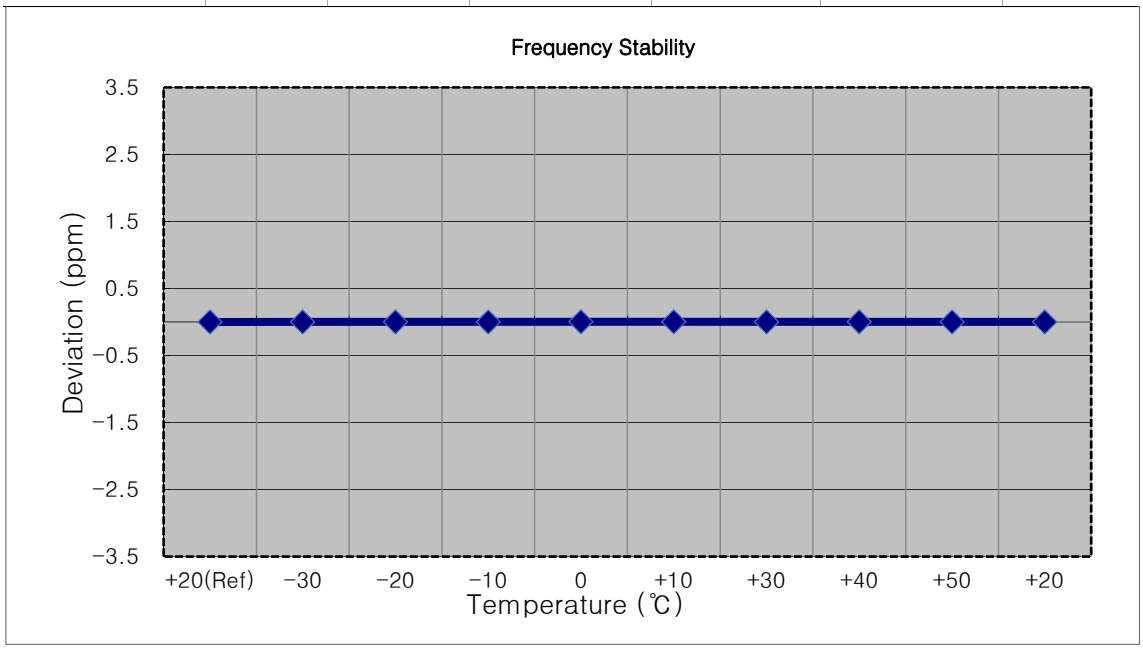

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (20 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100 %		-30	1880 000 004	1.9	0.000 000	0.001
100 %		-20	1880 000 004	1.6	0.000 000	0.001
100 %		-10	1880 000 004	1.7	0.000 000	0.001
100 %		0	1880 000 005	2.6	0.000 000	0.001
100 %		+10	1880 000 004	1.6	0.000 000	0.001
100 %		+30	1880 000 005	2.2	0.000 000	0.001
100 %		+40	1880 000 005	3.0	0.000 000	0.002
100 %		+50	1880 000 005	2.2	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 004	1.9	0.000 000	0.001

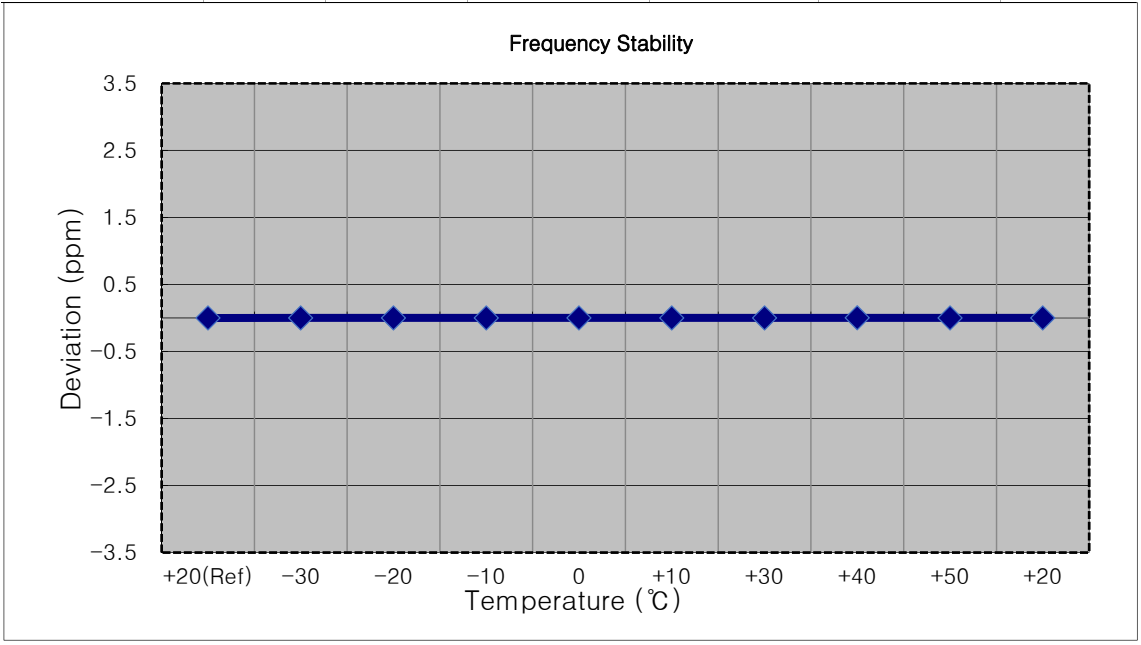

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1909,300,000 Hz

▣ CHANNEL: 19193 (1.4 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1909 300 002	0.0	0.000 000	0.000
100 %		-30	1909 300 004	2.5	0.000 000	0.001
100 %		-20	1909 300 004	2.2	0.000 000	0.001
100 %		-10	1909 300 005	3.1	0.000 000	0.002
100 %		0	1909 300 005	2.7	0.000 000	0.001
100 %		+10	1909 300 005	3.4	0.000 000	0.002
100 %		+30	1909 300 004	1.8	0.000 000	0.001
100 %		+40	1909 300 004	2.4	0.000 000	0.001
100 %		+50	1909 300 006	3.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1909 300 005	3.2	0.000 000	0.002

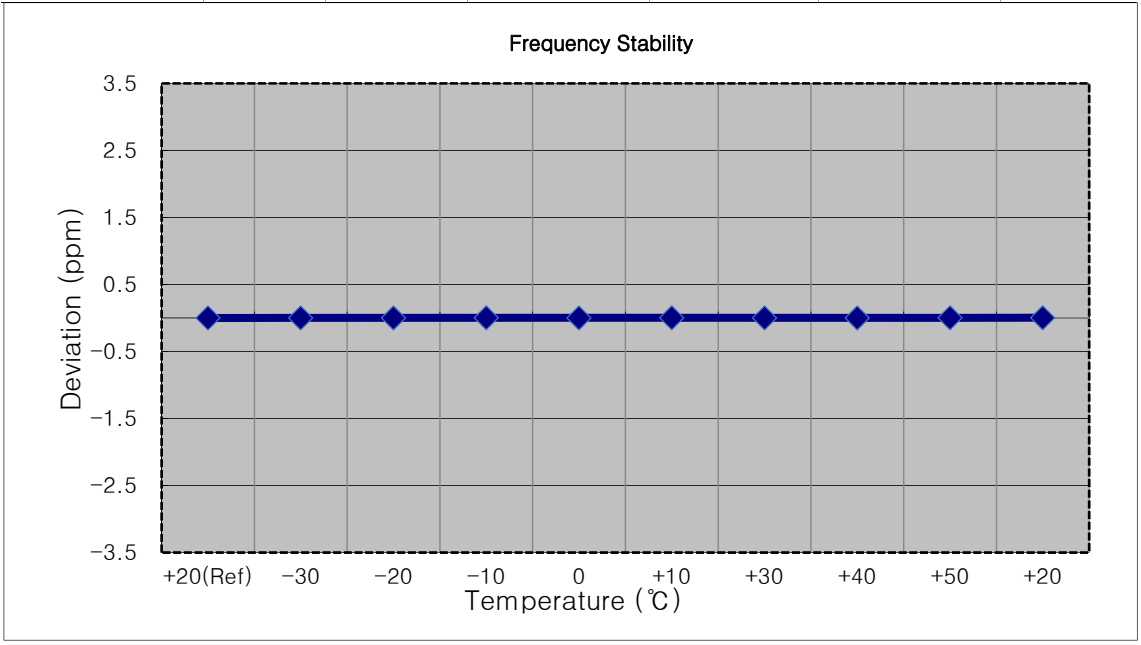

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1908,500,000 Hz

▣ CHANNEL: 19185 (3 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1908 500 010	0.0	0.000 000	0.000
100 %		-30	1908 500 018	7.9	0.000 000	0.004
100 %		-20	1908 500 017	7.1	0.000 000	0.004
100 %		-10	1908 500 018	8.2	0.000 000	0.004
100 %		0	1908 500 019	8.6	0.000 000	0.005
100 %		+10	1908 500 017	6.8	0.000 000	0.004
100 %		+30	1908 500 020	10.2	0.000 001	0.005
100 %		+40	1908 500 018	7.3	0.000 000	0.004
100 %		+50	1908 500 016	5.6	0.000 000	0.003
Batt. Endpoint	3.400	+20	1908 500 016	5.9	0.000 000	0.003

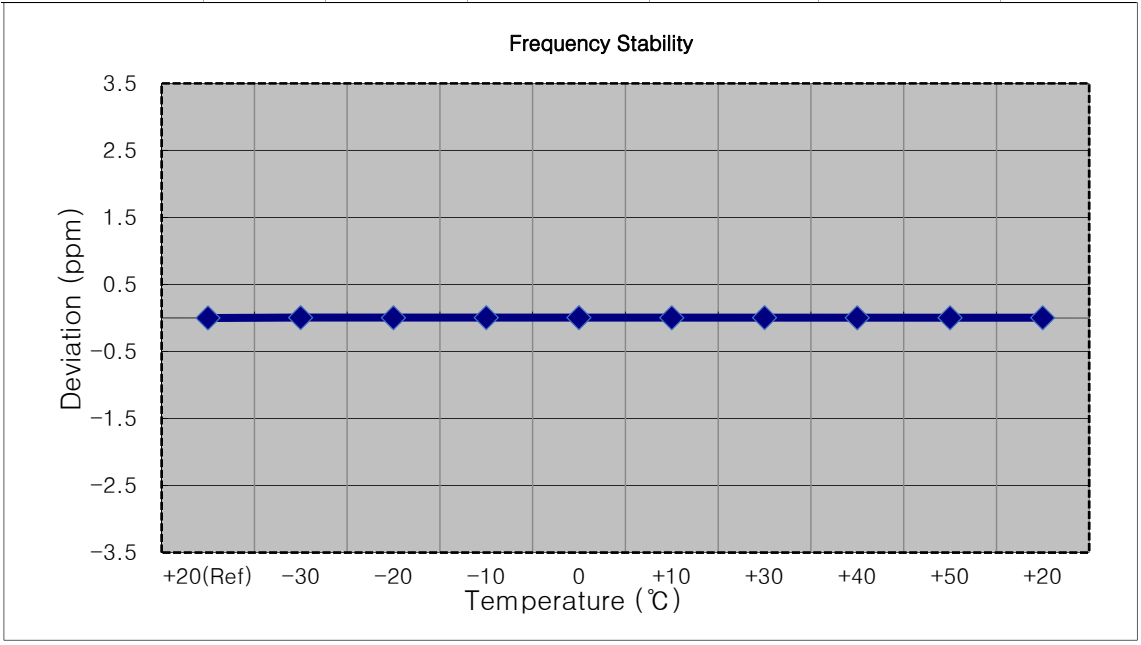

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1907,500,000 Hz

▣ CHANNEL: 19175 (5 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1907 500 005	0.0	0.000 000	0.000
100 %		-30	1907 500 008	3.6	0.000 000	0.002
100 %		-20	1907 500 009	4.2	0.000 000	0.002
100 %		-10	1907 500 007	2.3	0.000 000	0.001
100 %		0	1907 500 008	2.8	0.000 000	0.001
100 %		+10	1907 500 008	3.5	0.000 000	0.002
100 %		+30	1907 500 008	3.5	0.000 000	0.002
100 %		+40	1907 500 007	2.5	0.000 000	0.001
100 %		+50	1907 500 009	3.7	0.000 000	0.002
Batt. Endpoint	3.400	+20	1907 500 008	3.6	0.000 000	0.002

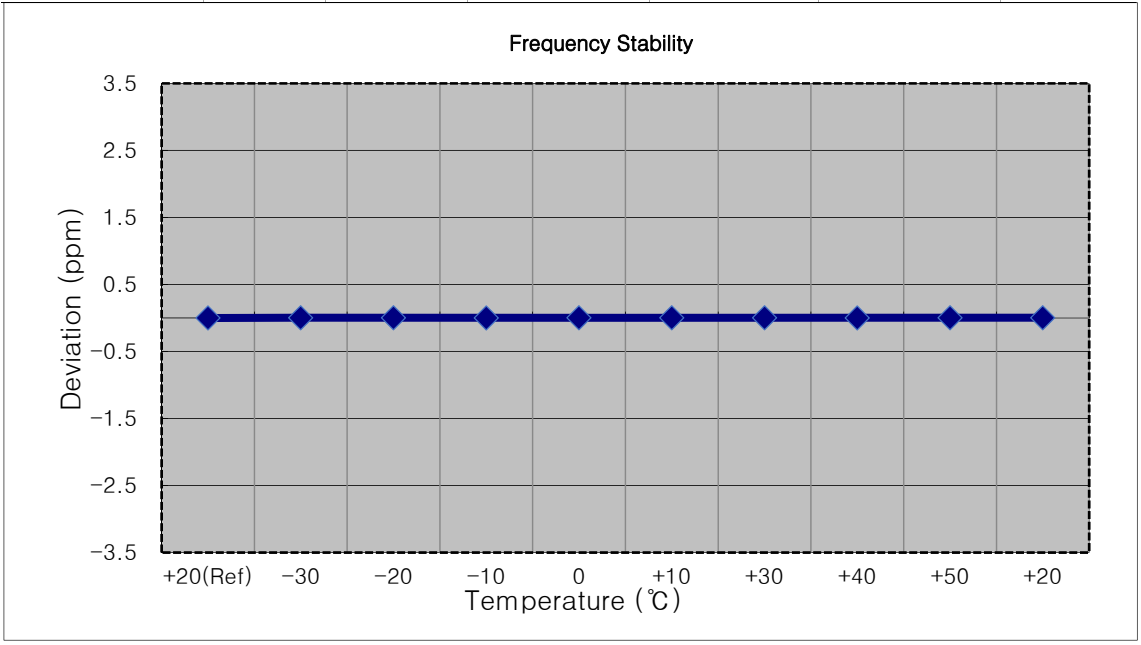

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1905,000,000 Hz

▣ CHANNEL: 19150 (10 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1905 000 003	0.0	0.000 000	0.000
100 %		-30	1905 000 006	3.0	0.000 000	0.002
100 %		-20	1905 000 006	2.5	0.000 000	0.001
100 %		-10	1905 000 005	2.3	0.000 000	0.001
100 %		0	1905 000 007	3.5	0.000 000	0.002
100 %		+10	1905 000 006	2.6	0.000 000	0.001
100 %		+30	1905 000 005	2.2	0.000 000	0.001
100 %		+40	1905 000 001	-1.9	0.000 000	-0.001
100 %		+50	1905 000 006	2.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	1905 000 006	2.7	0.000 000	0.001

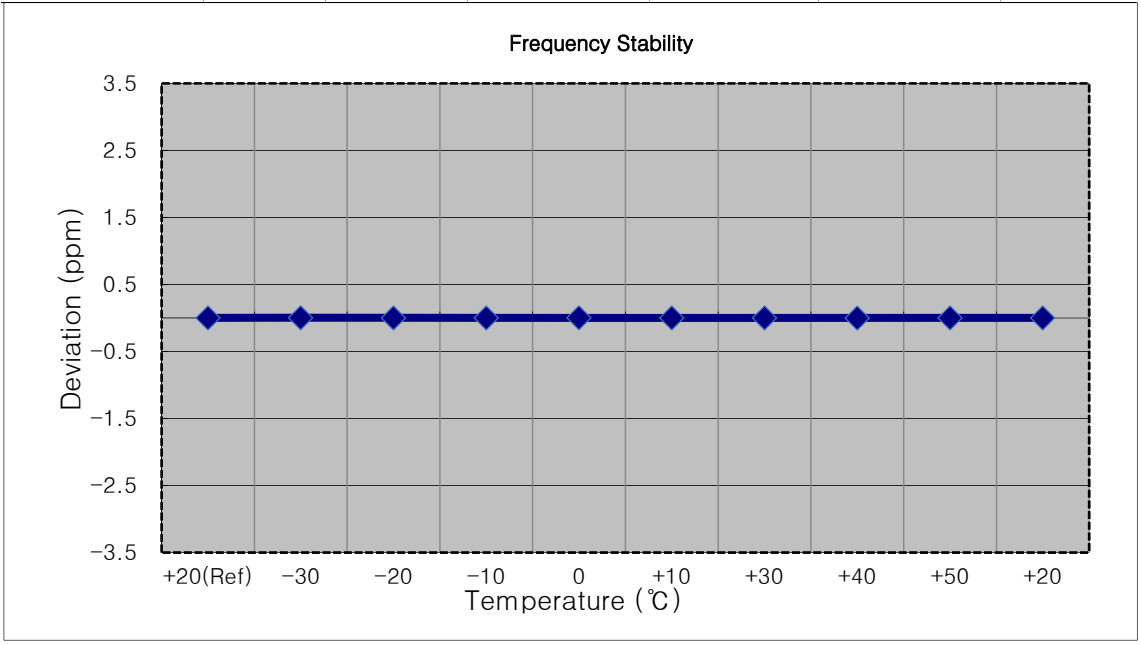

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1902,500,000 Hz

▣ CHANNEL: 19125 (15 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1902 500 004	0.0	0.000 000	0.000
100 %		-30	1902 500 007	3.1	0.000 000	0.002
100 %		-20	1902 500 006	2.6	0.000 000	0.001
100 %		-10	1902 500 005	1.2	0.000 000	0.001
100 %		0	1902 500 007	2.8	0.000 000	0.001
100 %		+10	1902 500 005	1.5	0.000 000	0.001
100 %		+30	1902 500 007	2.8	0.000 000	0.001
100 %		+40	1902 500 007	3.2	0.000 000	0.002
100 %		+50	1902 500 008	4.3	0.000 000	0.002
Batt. Endpoint	3.400	+20	1902 500 006	2.6	0.000 000	0.001

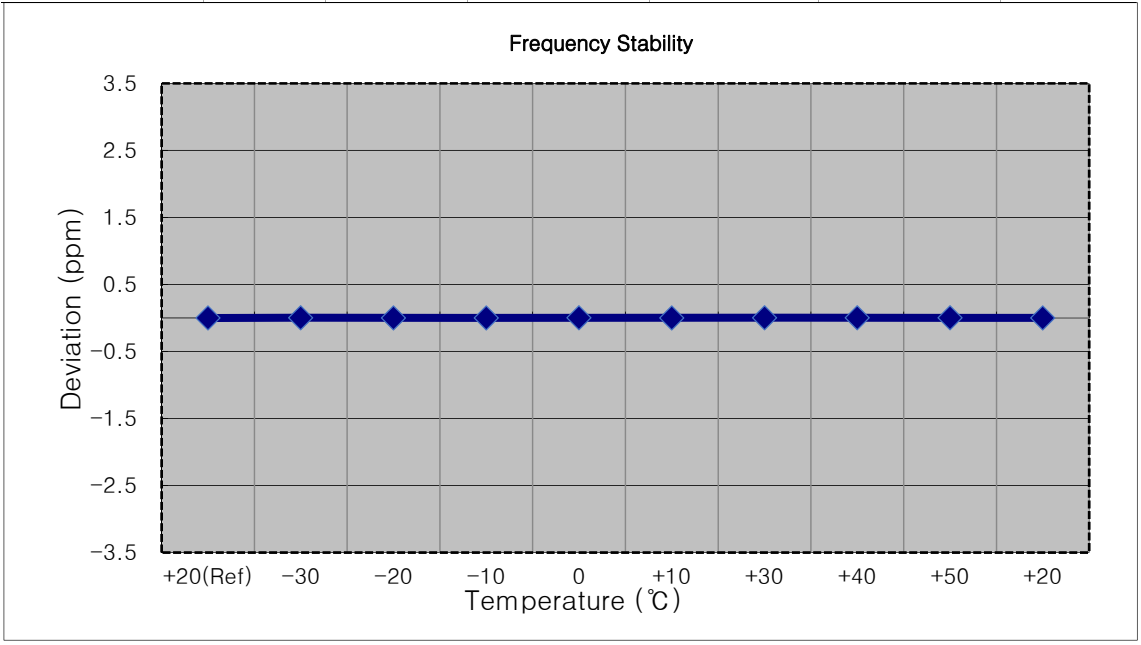

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1900,000,000 Hz

▣ CHANNEL: 19100 (20 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1900 000 002	0.0	0.000 000	0.000
100 %		-30	1900 000 005	2.5	0.000 000	0.001
100 %		-20	1900 000 005	3.0	0.000 000	0.002
100 %		-10	1900 000 004	2.3	0.000 000	0.001
100 %		0	1900 000 004	1.8	0.000 000	0.001
100 %		+10	1900 000 005	3.3	0.000 000	0.002
100 %		+30	1900 000 004	2.2	0.000 000	0.001
100 %		+40	1900 000 005	2.7	0.000 000	0.001
100 %		+50	1900 000 004	2.3	0.000 000	0.001
Batt. Endpoint	3.400	+20	1900 000 005	2.6	0.000 000	0.001

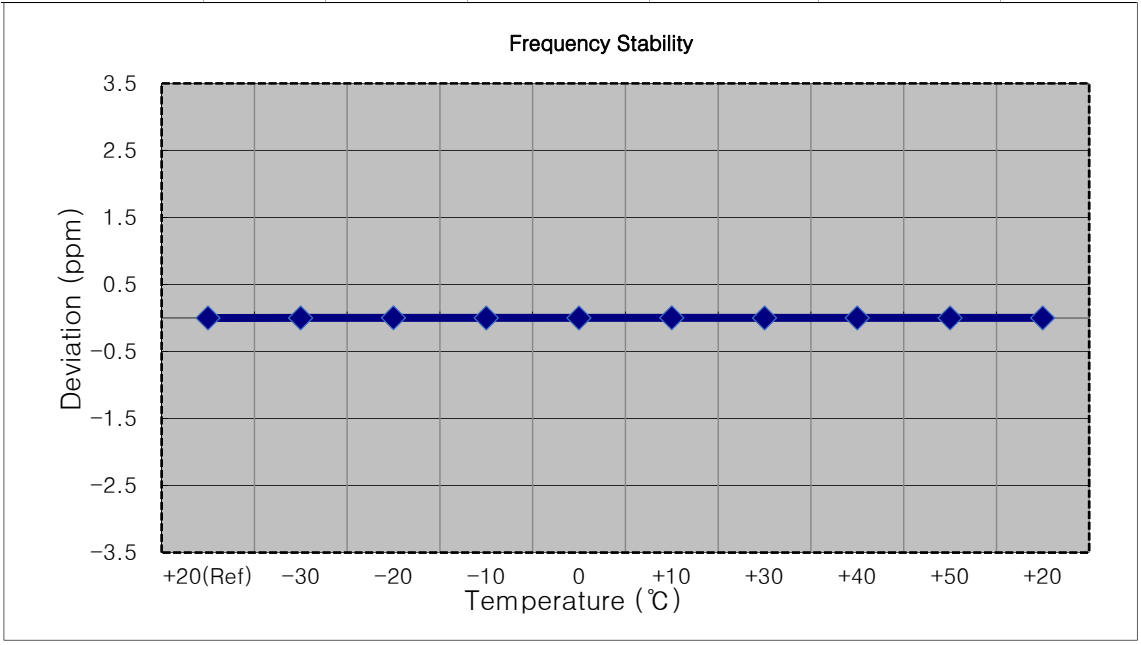

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9. TEST DATA(Sub 2 ANT)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1850.7	LTE B2/ 1.4 MHz	QPSK	-21.26	12.70	10.47	2.07	H	< 2.00	0.129	21.10	1	5
		16-QAM	-22.06	11.90	10.47	2.07	H		0.107	20.30		
		64-QAM	-23.14	10.82	10.47	2.07	H		0.084	19.22		
		256-QAM	-26.34	7.62	10.47	2.07	H		0.040	16.02		
1880.0		QPSK	-21.23	12.34	10.34	2.21	H		0.111	20.47	1	0
		16-QAM	-21.97	11.60	10.34	2.21	H		0.094	19.73		
		64-QAM	-23.01	10.56	10.34	2.21	H		0.074	18.69		
		256-QAM	-26.15	7.42	10.34	2.21	H		0.036	15.55		
1909.3		QPSK	-21.68	12.22	10.21	2.17	H		0.106	20.26	1	0
		16-QAM	-22.57	11.33	10.21	2.17	H		0.087	19.37		
		64-QAM	-23.67	10.23	10.21	2.17	H		0.067	18.27		
		256-QAM	-26.85	7.05	10.21	2.17	H		0.032	15.09		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1851.5	LTE B2/ 3 MHz	QPSK	-21.16	12.80	10.47	2.07	H	< 2.00	0.132	21.20	1	14
		16-QAM	-22.03	11.93	10.47	2.07	H		0.108	20.33		
		64-QAM	-23.12	10.84	10.47	2.07	H		0.084	19.24		
		256-QAM	-26.22	7.74	10.47	2.07	H		0.041	16.14		
1880.0		QPSK	-21.19	12.38	10.34	2.21	H		0.113	20.51	1	0
		16-QAM	-21.89	11.68	10.34	2.21	H		0.096	19.81		
		64-QAM	-23.01	10.56	10.34	2.21	H		0.074	18.69		
		256-QAM	-26.11	7.46	10.34	2.21	H		0.036	15.59		
1908.5		QPSK	-21.75	12.15	10.21	2.17	H		0.105	20.19	1	8
		16-QAM	-22.69	11.21	10.21	2.17	H		0.084	19.25		
		64-QAM	-23.76	10.14	10.21	2.17	H		0.066	18.18		
		256-QAM	-26.94	6.96	10.21	2.17	H		0.032	15.00		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1852.5	LTE B2/ 5 MHz	QPSK	-21.35	12.28	10.45	2.08	H	< 2.00	0.116	20.65	1	24
		16-QAM	-22.19	11.44	10.45	2.08	H		0.096	19.81		
		64-QAM	-23.26	10.37	10.45	2.08	H		0.075	18.74		
		256-QAM	-26.40	7.23	10.45	2.08	H		0.036	15.60		
1880.0		QPSK	-21.10	12.47	10.34	2.21	H		0.115	20.60	1	0
		16-QAM	-21.85	11.72	10.34	2.21	H		0.097	19.85		
		64-QAM	-22.93	10.64	10.34	2.21	H		0.075	18.77		
		256-QAM	-26.04	7.53	10.34	2.21	H		0.037	15.66		
1907.5		QPSK	-21.86	12.04	10.21	2.17	H		0.102	20.08	1	24
		16-QAM	-22.56	11.34	10.21	2.17	H		0.087	19.38		
		64-QAM	-23.64	10.26	10.21	2.17	H		0.068	18.30		
		256-QAM	-26.84	7.06	10.21	2.17	H		0.032	15.10		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1855.0	LTE B2/ 10 MHz	QPSK	-21.26	12.37	10.45	2.08	H	< 2.00	0.119	20.74	1	49
		16-QAM	-22.16	11.47	10.45	2.08	H		0.096	19.84		
		64-QAM	-23.18	10.45	10.45	2.08	H		0.076	18.82		
		256-QAM	-26.33	7.30	10.45	2.08	H		0.037	15.67		
1880.0		QPSK	-21.13	12.44	10.34	2.21	H		0.114	20.57	1	0
		16-QAM	-21.88	11.69	10.34	2.21	H		0.096	19.82		
		64-QAM	-23.01	10.56	10.34	2.21	H		0.074	18.69		
		256-QAM	-26.13	7.44	10.34	2.21	H		0.036	15.57		
1905.0		QPSK	-21.74	12.30	10.23	2.19	H		0.108	20.34	1	0
		16-QAM	-22.47	11.57	10.23	2.19	H		0.091	19.61		
		64-QAM	-23.30	10.74	10.23	2.19	H		0.076	18.78		
		256-QAM	-26.47	7.57	10.23	2.19	H		0.036	15.61		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1857.5	LTE B2/ 15 MHz	QPSK	-21.49	11.83	10.43	2.10	H	< 2.00	0.104	20.16	1	38
		16-QAM	-22.37	10.95	10.43	2.10	H		0.085	19.28		
		64-QAM	-23.41	9.91	10.43	2.10	H		0.067	18.24		
		256-QAM	-26.53	6.79	10.43	2.10	H		0.033	15.12		
1880.0		QPSK	-21.38	12.19	10.34	2.21	H		0.108	20.32	1	38
		16-QAM	-22.13	11.44	10.34	2.21	H		0.091	19.57		
		64-QAM	-23.19	10.38	10.34	2.21	H		0.071	18.51		
		256-QAM	-26.27	7.30	10.34	2.21	H		0.035	15.43		
1902.5		QPSK	-21.44	12.60	10.23	2.19	H		0.116	20.64	1	38
		16-QAM	-22.29	11.75	10.23	2.19	H		0.095	19.79		
		64-QAM	-23.39	10.65	10.23	2.19	H		0.074	18.69		
		256-QAM	-26.55	7.49	10.23	2.19	H		0.036	15.53		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1860.0	LTE B2/ 20 MHz	QPSK	-21.47	11.85	10.43	2.10	H	< 2.00	0.104	20.18	1	50
		16-QAM	-22.35	10.97	10.43	2.10	H		0.085	19.30		
		64-QAM	-23.43	9.89	10.43	2.10	H		0.066	18.22		
		256-QAM	-26.57	6.75	10.43	2.10	H		0.032	15.08		
1880.0		QPSK	-21.39	12.18	10.34	2.21	H		0.107	20.31	1	50
		16-QAM	-22.14	11.43	10.34	2.21	H		0.090	19.56		
		64-QAM	-23.27	10.30	10.34	2.21	H		0.070	18.43		
		256-QAM	-26.32	7.25	10.34	2.21	H		0.035	15.38		
1900.0		QPSK	-22.02	12.15	10.25	2.20	H		0.105	20.20	1	50
		16-QAM	-22.62	11.55	10.25	2.20	H		0.091	19.60		
		64-QAM	-23.51	10.66	10.25	2.20	H		0.074	18.71		
		256-QAM	-26.60	7.57	10.25	2.20	H		0.037	15.62		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.2 RADIATED SPURIOUS EMISSIONS

▣ MODE: LTE B2

▣ MODULATION SIGNAL: 3 MHz QPSK

▣ DISTANCE: 3 meters

▣ LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
18615 (1851.5)	3 703.00	-61.18	12.08	-61.87	3.08	H	-52.87	1	14
	5 554.50	-60.36	12.22	-54.55	3.88	H	-46.21		
	7 406.00	-47.48	11.17	-32.18	4.57	H	-25.58		
18900 (1880.0)	3 760.00	-59.14	11.90	-58.77	3.12	H	-49.99	1	0
	5 640.00	-60.38	12.14	-54.06	3.92	H	-45.84		
	7 520.00	-47.33	11.56	-32.48	4.61	H	-25.53		
19185 (1908.5)	3 817.00	-61.29	11.65	-60.54	3.20	V	-52.09	1	8
	5 725.50	-62.35	11.88	-56.21	4.00	V	-48.33		
	7 634.00	-50.89	11.55	-36.74	4.67	V	-29.86		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.59
			16-QAM			6.29
			64-QAM			6.39
			256-QAM			6.20
	3 MHz		QPSK	15		5.69
			16-QAM			6.31
			64-QAM			6.37
			256-QAM			6.32
	5 MHz		QPSK	25		5.63
			16-QAM			6.30
			64-QAM			6.37
			256-QAM			6.30
	10 MHz		QPSK	50		5.71
			16-QAM			6.29
			64-QAM			6.39
			256-QAM			6.30
	15 MHz		QPSK	75		5.60
			16-QAM			6.26
			64-QAM			6.37
			256-QAM			6.32
	20 MHz		QPSK	100		5.62
			16-QAM			6.33
			64-QAM			6.43
			256-QAM			6.38

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 199 ~ 222.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0971
			16-QAM			1.0958
			64-QAM			1.0973
			256-QAM			1.0945
	3 MHz		QPSK	15		2.7177
			16-QAM			2.7090
			64-QAM			2.7051
			256-QAM			2.7152
	5 MHz		QPSK	25		4.5294
			16-QAM			4.5109
			64-QAM			4.5185
			256-QAM			4.5518
	10 MHz		QPSK	50		9.0194
			16-QAM			9.0128
			64-QAM			9.0005
			256-QAM			9.0243
	15 MHz		QPSK	75		13.454
			16-QAM			13.463
			64-QAM			13.457
			256-QAM			13.467
	20 MHz		QPSK	100		17.948
			16-QAM			17.909
			64-QAM			17.926
			256-QAM			17.938

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 223 ~ 246.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7289	27.976	-67.690	-39.714	-13.00
		1880.0	3.6990	27.976	-67.678	-39.702	
		1909.3	3.6990	27.976	-66.809	-38.833	
	3	1851.5	3.7189	27.976	-66.943	-38.967	
		1880.0	6.9592	28.591	-67.812	-39.221	
		1908.5	3.5793	27.976	-68.056	-40.080	
	5	1852.5	6.2712	28.591	-68.039	-39.448	
		1880.0	3.7588	27.976	-66.986	-39.010	
		1907.5	3.7089	27.976	-67.088	-39.112	
	10	1855.0	3.6890	27.976	-68.086	-40.110	
		1880.0	3.6790	27.976	-67.894	-39.918	
		1905.0	3.6591	27.976	-68.031	-40.055	
	15	1857.5	6.9292	28.591	-68.317	-39.726	
		1880.0	2.6521	27.976	-67.915	-39.939	
		1902.5	6.2214	28.591	-67.846	-39.255	
	20	1860.0	3.0509	27.976	-68.074	-40.098	
		1880.0	3.2503	27.976	-68.081	-40.105	
		1900.0	3.6990	27.976	-67.467	-39.491	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 247 ~ 282.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 283 ~ 318.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1850 699 998	0.0	0.000 000	0.000
100 %		-30	1850 699 996	-2.1	0.000 000	-0.001
100 %		-20	1850 699 996	-1.6	0.000 000	-0.001
100 %		-10	1850 699 996	-2.0	0.000 000	-0.001
100 %		0	1850 699 996	-1.4	0.000 000	-0.001
100 %		+10	1850 700 000	2.3	0.000 000	0.001
100 %		+30	1850 699 997	-1.2	0.000 000	-0.001
100 %		+40	1850 699 999	0.8	0.000 000	0.000
100 %		+50	1850 700 000	2.0	0.000 000	0.001
Batt. Endpoint	3.400	+20	1850 699 999	1.6	0.000 000	0.001

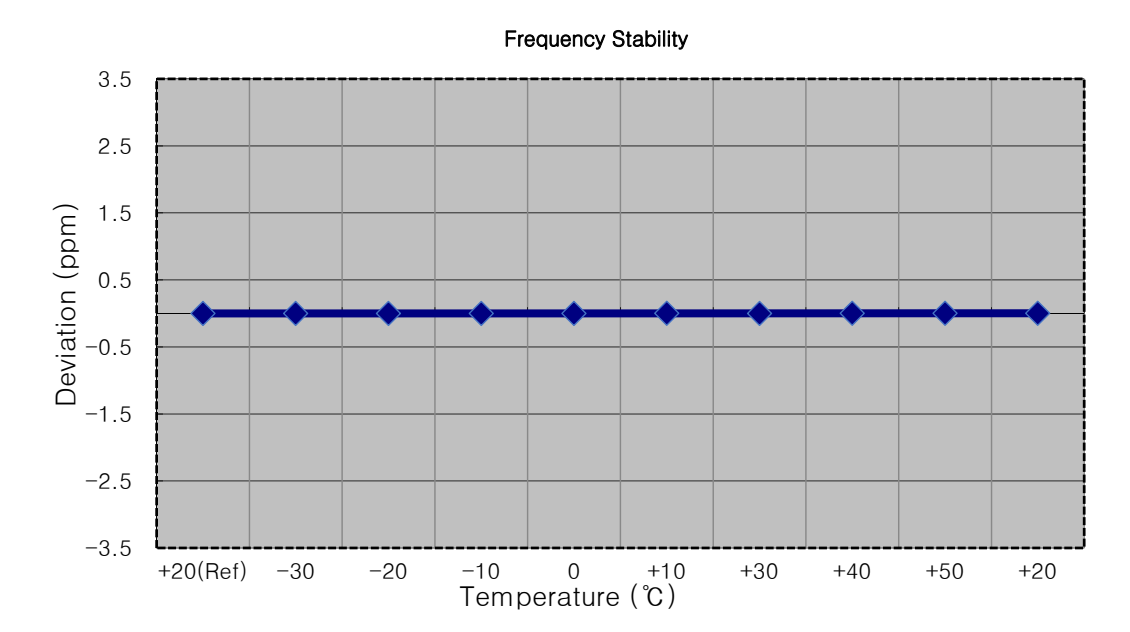

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1851,500,000 Hz

▣ CHANNEL: 18615 (3 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1851 500 003	0.0	0.000 000	0.000
100 %		-30	1851 500 005	2.2	0.000 000	0.001
100 %		-20	1851 500 000	-2.4	0.000 000	-0.001
100 %		-10	1851 500 004	1.6	0.000 000	0.001
100 %		0	1851 500 001	-1.5	0.000 000	-0.001
100 %		+10	1851 500 005	2.1	0.000 000	0.001
100 %		+30	1851 500 005	2.9	0.000 000	0.002
100 %		+40	1851 500 005	2.5	0.000 000	0.001
100 %		+50	1851 500 000	-2.5	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1851 500 001	-2.0	0.000 000	-0.001

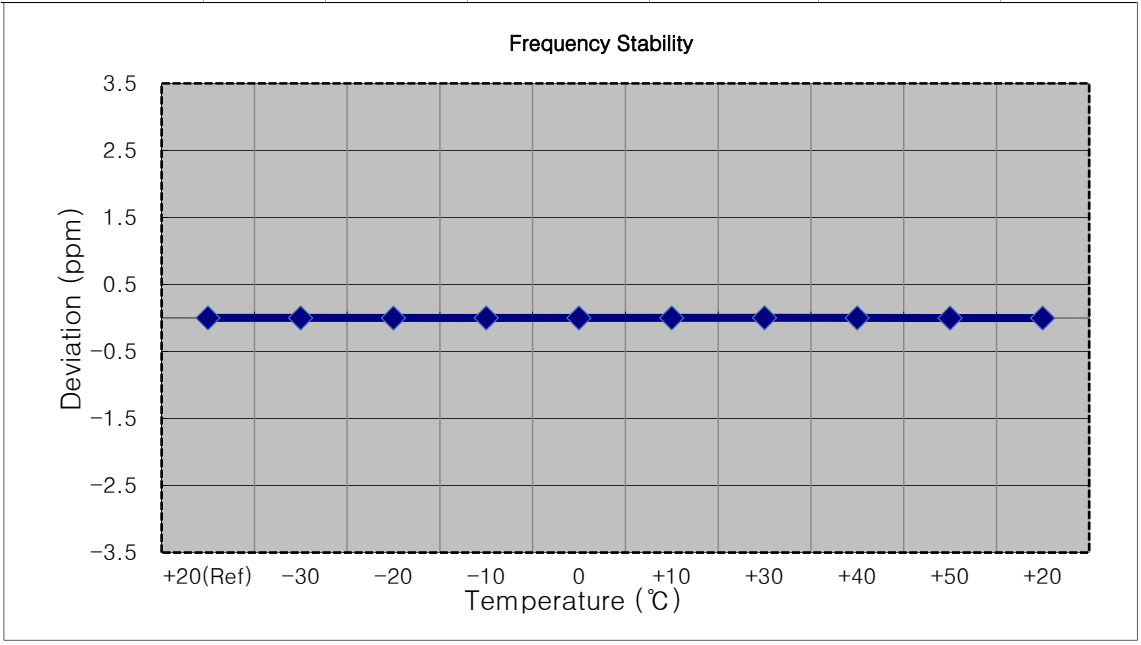

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1852,500,000 Hz

▣ CHANNEL: 18625 (5 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1852 500 003	0.0	0.000 000	0.000
100 %		-30	1852 500 006	3.0	0.000 000	0.002
100 %		-20	1852 500 005	2.6	0.000 000	0.001
100 %		-10	1852 500 006	2.8	0.000 000	0.002
100 %		0	1852 500 004	1.5	0.000 000	0.001
100 %		+10	1852 500 004	1.3	0.000 000	0.001
100 %		+30	1852 500 005	1.8	0.000 000	0.001
100 %		+40	1852 500 006	2.8	0.000 000	0.002
100 %		+50	1852 500 005	1.9	0.000 000	0.001
Batt. Endpoint	3.400	+20	1852 500 005	1.9	0.000 000	0.001

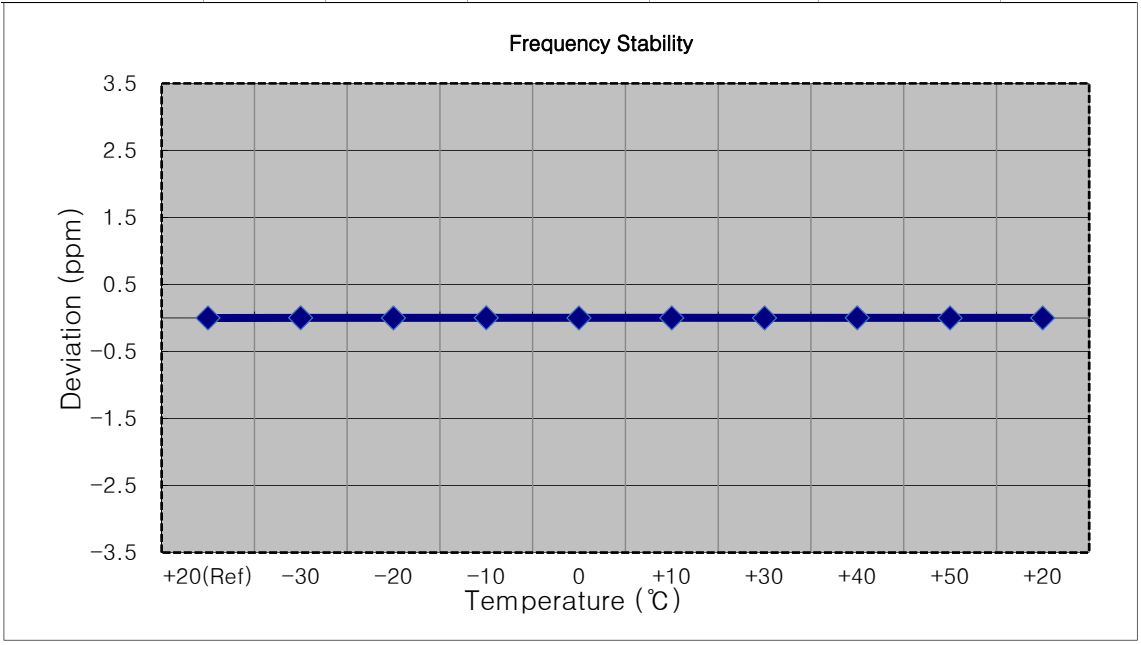

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1855,000,000 Hz

▣ CHANNEL: 18650 (10 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1855 000 003	0.0	0.000 000	0.000
100 %		-30	1855 000 006	3.2	0.000 000	0.002
100 %		-20	1855 000 005	2.1	0.000 000	0.001
100 %		-10	1855 000 006	3.3	0.000 000	0.002
100 %		0	1855 000 006	3.1	0.000 000	0.002
100 %		+10	1855 000 006	2.9	0.000 000	0.002
100 %		+30	1855 000 007	3.7	0.000 000	0.002
100 %		+40	1855 000 006	3.2	0.000 000	0.002
100 %		+50	1855 000 006	3.0	0.000 000	0.002
Batt. Endpoint	3.400	+20	1855 000 007	3.4	0.000 000	0.002

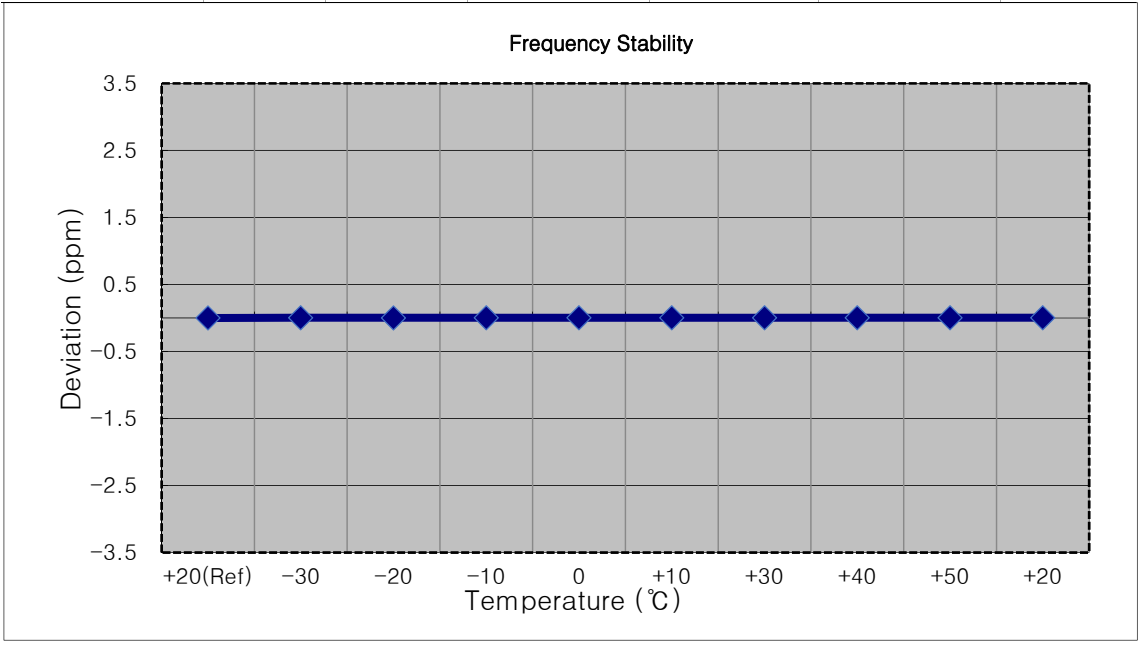

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1857,500,000 Hz

▣ CHANNEL: 18675 (15 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1857 500 002	0.0	0.000 000	0.000
100 %		-30	1857 500 003	1.2	0.000 000	0.001
100 %		-20	1857 500 005	3.1	0.000 000	0.002
100 %		-10	1857 500 005	2.4	0.000 000	0.001
100 %		0	1857 500 003	1.2	0.000 000	0.001
100 %		+10	1857 500 004	2.0	0.000 000	0.001
100 %		+30	1857 500 004	1.5	0.000 000	0.001
100 %		+40	1857 500 004	1.5	0.000 000	0.001
100 %		+50	1857 500 005	2.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1857 500 004	1.8	0.000 000	0.001

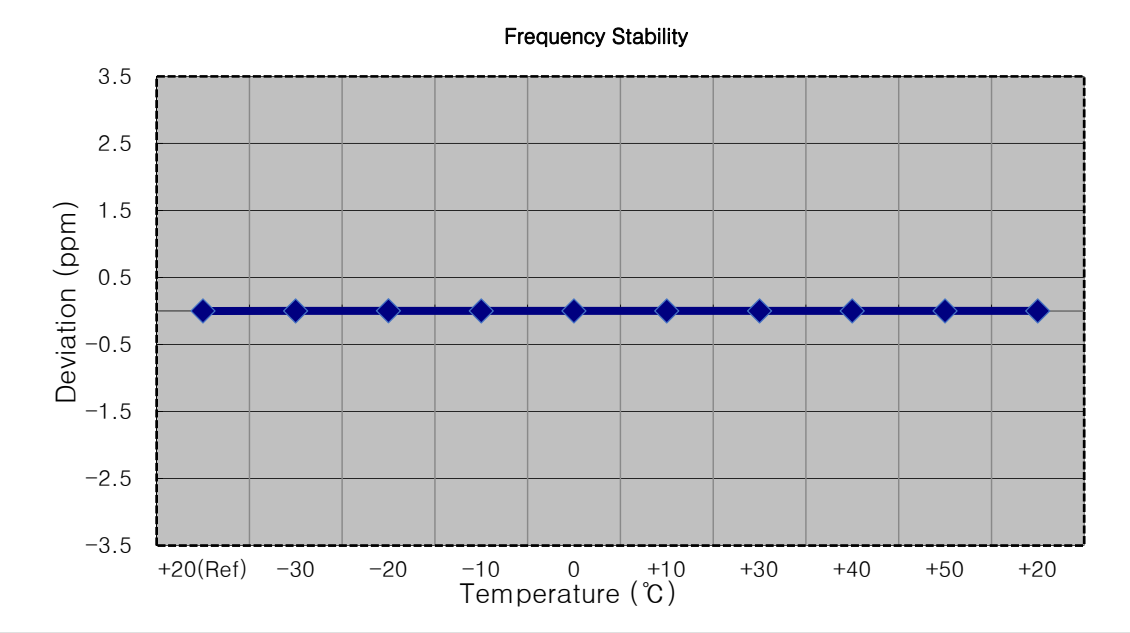

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1860,000,000 Hz

▣ CHANNEL: 18700 (20 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1860 000 002	0.0	0.000 000	0.000
100 %		-30	1860 000 004	2.1	0.000 000	0.001
100 %		-20	1860 000 004	2.3	0.000 000	0.001
100 %		-10	1860 000 004	2.3	0.000 000	0.001
100 %		0	1860 000 004	2.5	0.000 000	0.001
100 %		+10	1860 000 004	2.1	0.000 000	0.001
100 %		+30	1860 000 004	2.2	0.000 000	0.001
100 %		+40	1860 000 003	0.8	0.000 000	0.000
100 %		+50	1860 000 004	2.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	1860 000 003	1.3	0.000 000	0.001

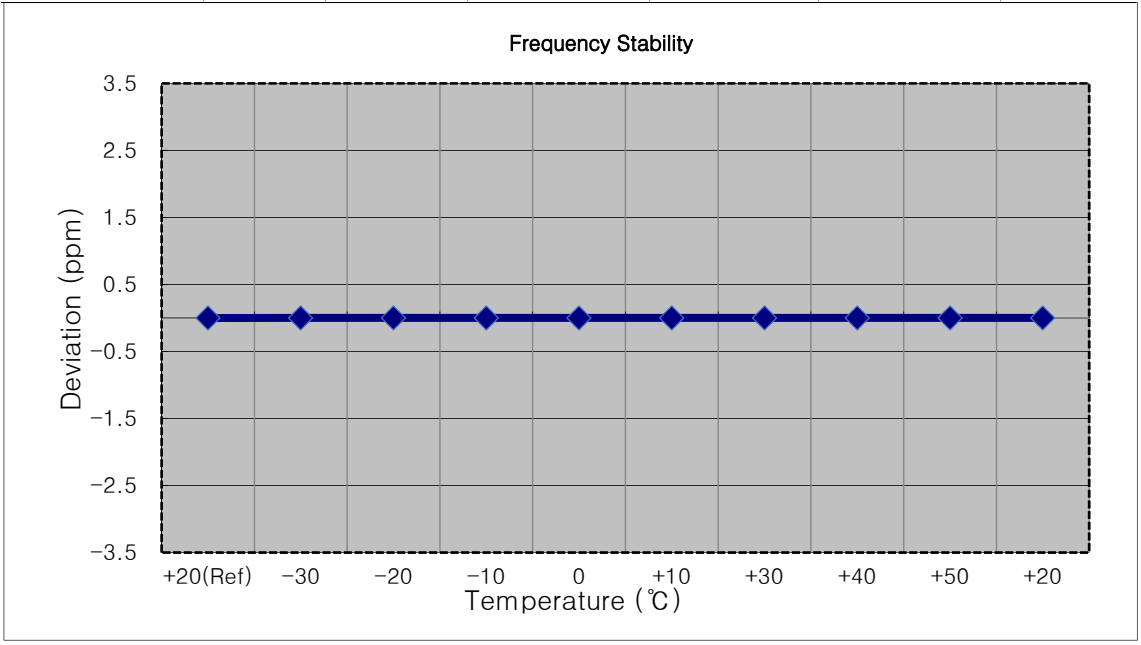

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (1.4 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1879 999 999	0.0	0.000 000	0.000
100 %		-30	1879 999 997	-2.1	0.000 000	-0.001
100 %		-20	1879 999 998	-1.0	0.000 000	-0.001
100 %		-10	1879 999 995	-3.6	0.000 000	-0.002
100 %		0	1879 999 997	-2.0	0.000 000	-0.001
100 %		+10	1880 000 000	1.1	0.000 000	0.001
100 %		+30	1880 000 001	1.9	0.000 000	0.001
100 %		+40	1879 999 997	-2.3	0.000 000	-0.001
100 %		+50	1879 999 996	-2.7	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1879 999 998	-1.3	0.000 000	-0.001

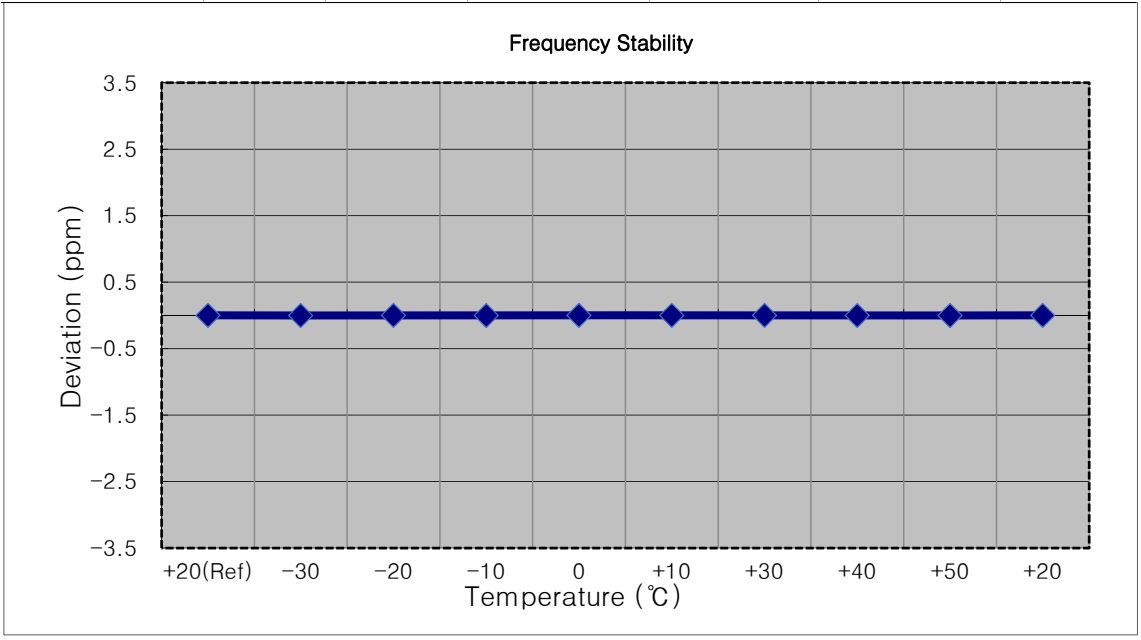

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (3 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1879 999 999	-1.8	0.000 000	-0.001
100 %		-20	1879 999 998	-2.7	0.000 000	-0.001
100 %		-10	1879 999 998	-2.9	0.000 000	-0.002
100 %		0	1879 999 999	-1.6	0.000 000	-0.001
100 %		+10	1879 999 999	-2.3	0.000 000	-0.001
100 %		+30	1879 999 999	-1.8	0.000 000	-0.001
100 %		+40	1879 999 999	-1.4	0.000 000	-0.001
100 %		+50	1879 999 999	-2.1	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1880 000 003	1.7	0.000 000	0.001

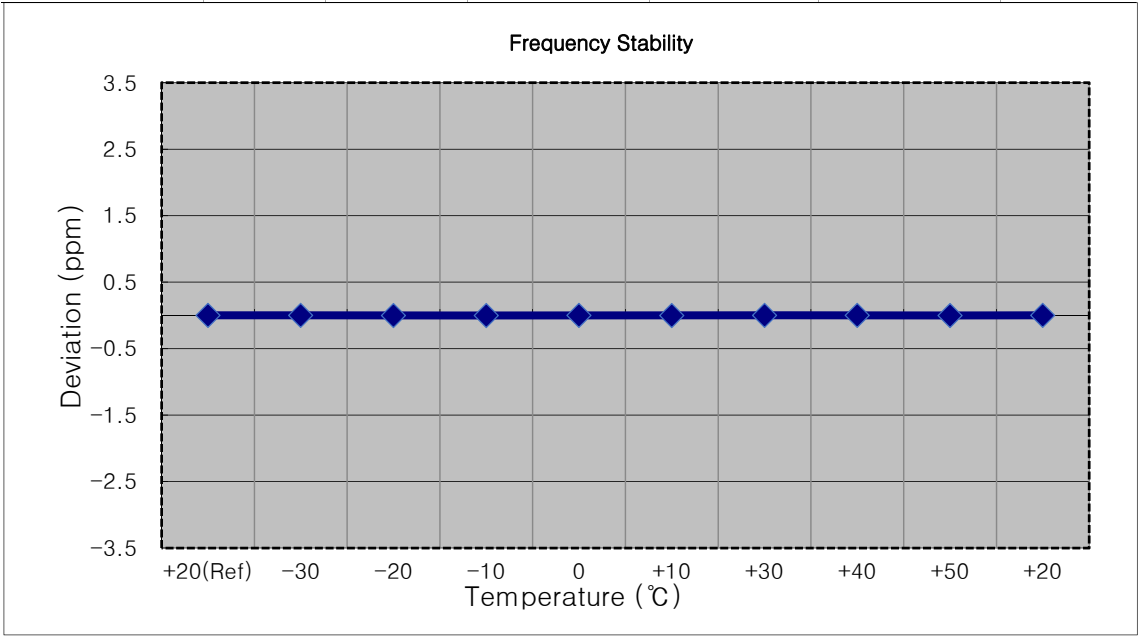

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (5 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1880 000 003	1.6	0.000 000	0.001
100 %		-20	1880 000 000	-1.4	0.000 000	-0.001
100 %		-10	1880 000 004	2.2	0.000 000	0.001
100 %		0	1880 000 004	2.5	0.000 000	0.001
100 %		+10	1880 000 005	3.8	0.000 000	0.002
100 %		+30	1880 000 004	2.3	0.000 000	0.001
100 %		+40	1880 000 003	1.5	0.000 000	0.001
100 %		+50	1880 000 004	3.0	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 004	2.2	0.000 000	0.001

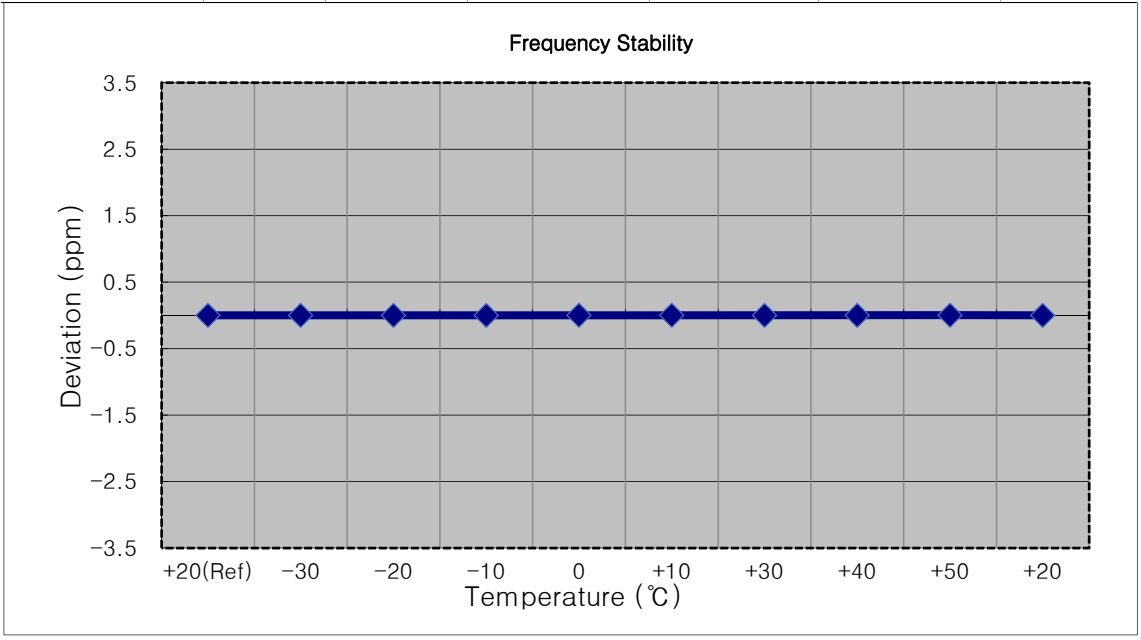

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (10 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1879 999 997	-1.6	0.000 000	-0.001
100 %		-20	1880 000 000	1.4	0.000 000	0.001
100 %		-10	1880 000 001	2.1	0.000 000	0.001
100 %		0	1880 000 001	2.8	0.000 000	0.001
100 %		+10	1880 000 000	1.7	0.000 000	0.001
100 %		+30	1880 000 000	1.8	0.000 000	0.001
100 %		+40	1880 000 001	2.8	0.000 000	0.001
100 %		+50	1880 000 000	1.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 002	3.4	0.000 000	0.002

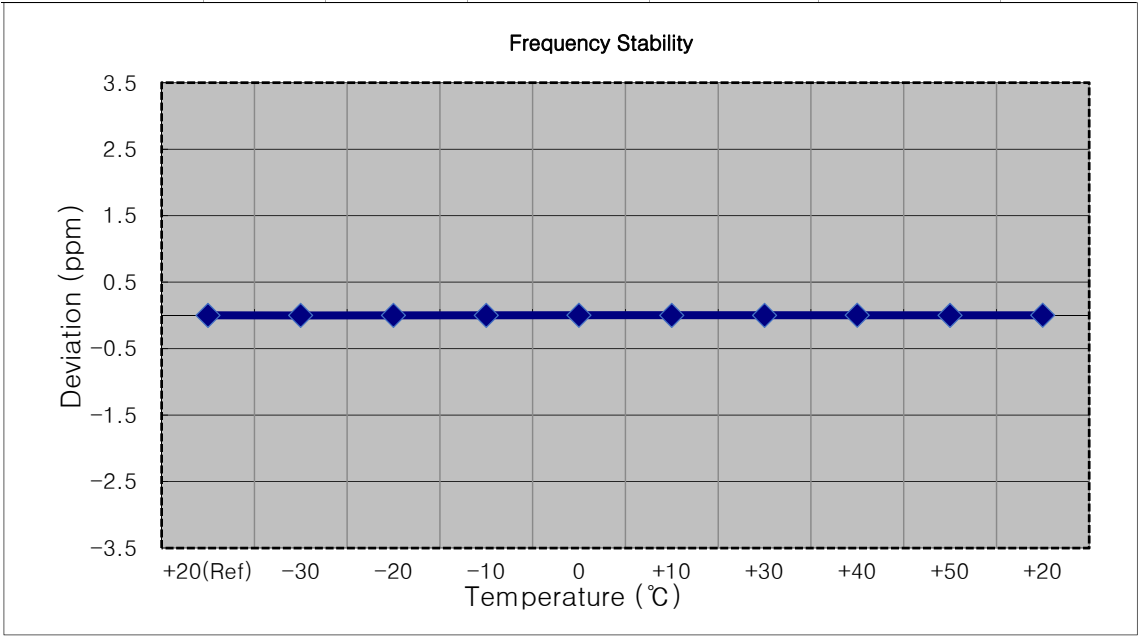

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (15 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100 %		-30	1880 000 003	1.4	0.000 000	0.001
100 %		-20	1880 000 000	-1.8	0.000 000	-0.001
100 %		-10	1880 000 000	-1.6	0.000 000	-0.001
100 %		0	1880 000 003	1.3	0.000 000	0.001
100 %		+10	1880 000 003	1.2	0.000 000	0.001
100 %		+30	1880 000 005	3.2	0.000 000	0.002
100 %		+40	1880 000 004	1.8	0.000 000	0.001
100 %		+50	1880 000 005	2.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 003	1.5	0.000 000	0.001

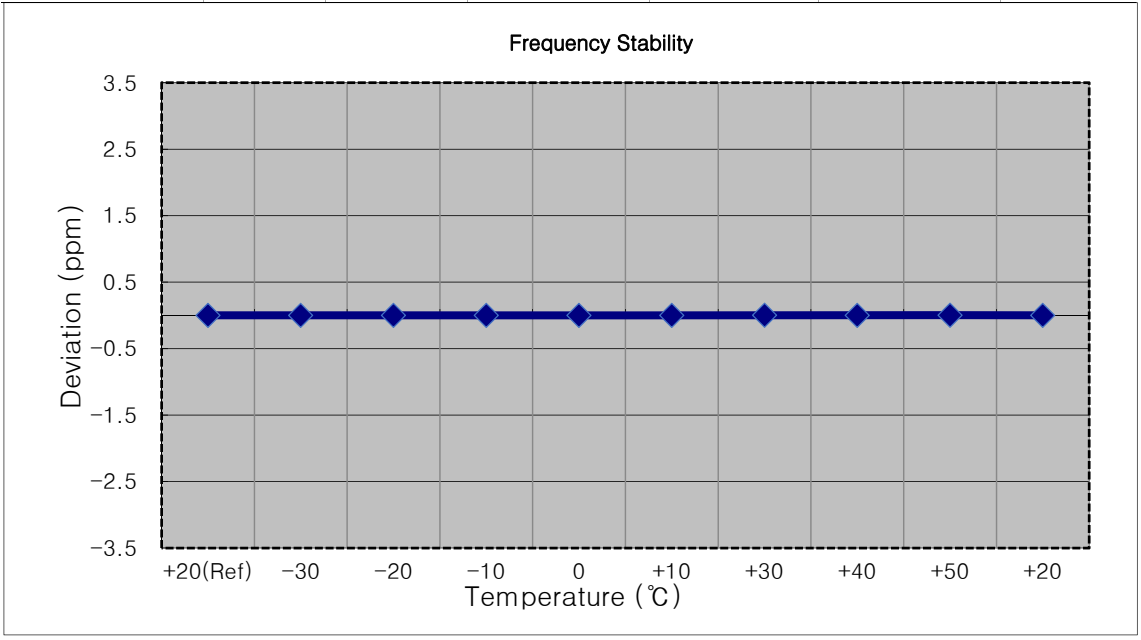

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 18900 (20 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1880 000 003	1.9	0.000 000	0.001
100 %		-20	1880 000 003	1.7	0.000 000	0.001
100 %		-10	1880 000 003	1.7	0.000 000	0.001
100 %		0	1880 000 003	2.1	0.000 000	0.001
100 %		+10	1880 000 004	2.6	0.000 000	0.001
100 %		+30	1880 000 003	1.9	0.000 000	0.001
100 %		+40	1880 000 003	2.0	0.000 000	0.001
100 %		+50	1880 000 000	-0.9	0.000 000	0.000
Batt. Endpoint	3.400	+20	1880 000 003	2.5	0.000 000	0.001

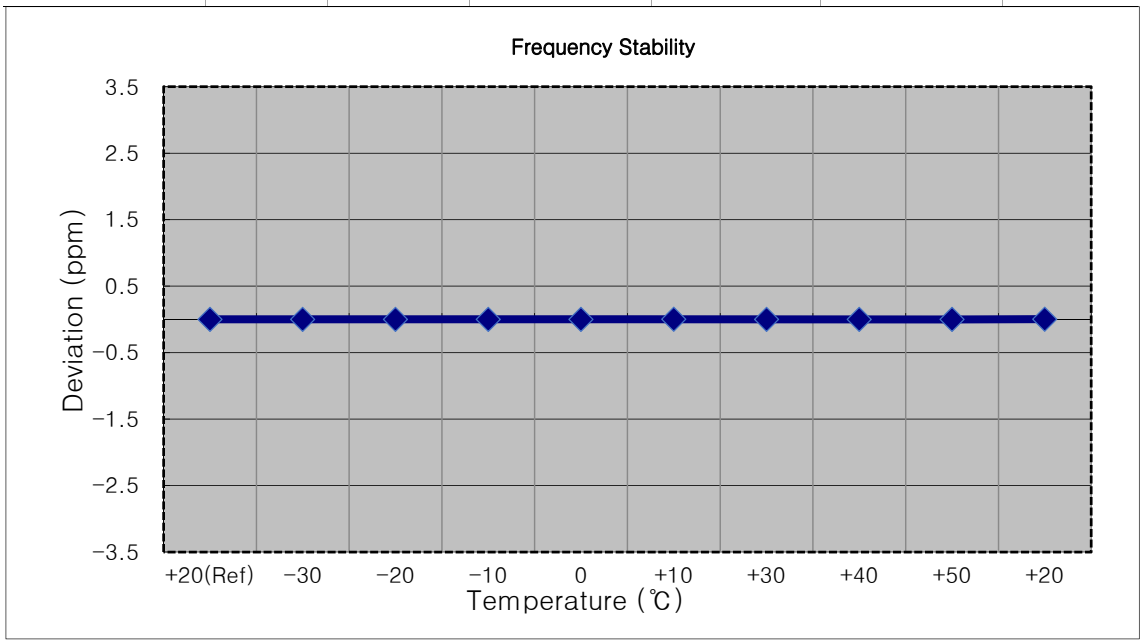

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1909,300,000 Hz

▣ CHANNEL: 19193 (1.4 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1909 300 002	0.0	0.000 000	0.000
100 %		-30	1909 300 005	2.2	0.000 000	0.001
100 %		-20	1909 300 000	-2.4	0.000 000	-0.001
100 %		-10	1909 299 999	-3.1	0.000 000	-0.002
100 %		0	1909 299 999	-3.1	0.000 000	-0.002
100 %		+10	1909 300 004	1.9	0.000 000	0.001
100 %		+30	1909 300 001	-1.6	0.000 000	-0.001
100 %		+40	1909 300 000	-2.8	0.000 000	-0.001
100 %		+50	1909 300 004	1.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1909 300 001	-1.8	0.000 000	-0.001

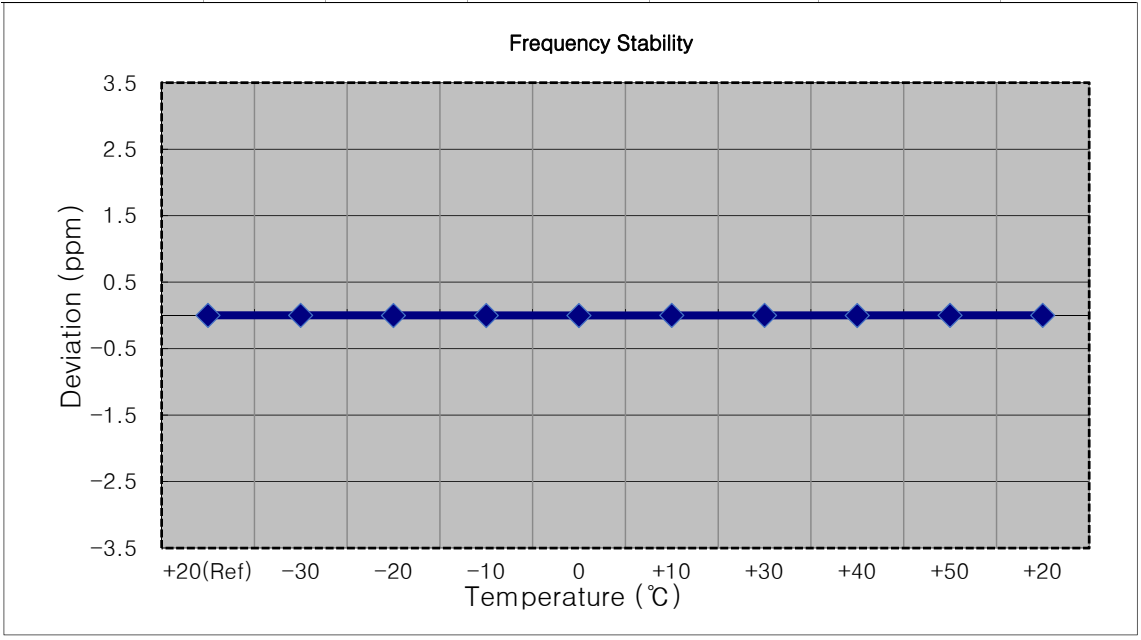

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1908,500,000 Hz

▣ CHANNEL: 19185 (3 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1908 500 009	0.0	0.000 000	0.000
100 %		-30	1908 500 017	8.1	0.000 000	0.004
100 %		-20	1908 500 018	8.7	0.000 000	0.005
100 %		-10	1908 500 013	4.0	0.000 000	0.002
100 %		0	1908 500 014	4.5	0.000 000	0.002
100 %		+10	1908 500 016	6.4	0.000 000	0.003
100 %		+30	1908 500 016	6.3	0.000 000	0.003
100 %		+40	1908 500 016	7.1	0.000 000	0.004
100 %		+50	1908 500 014	5.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1908 500 016	7.2	0.000 000	0.004

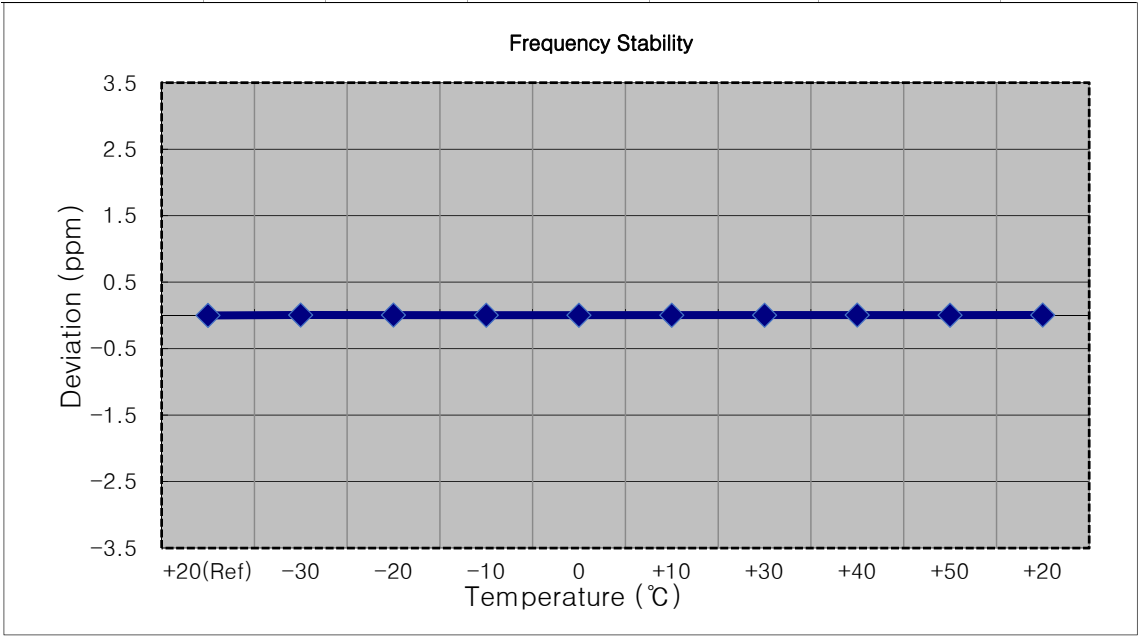

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1907,500,000 Hz

▣ CHANNEL: 19175 (5 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(℃)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1907 500 001	0.0	0.000 000	0.000
100 %		-30	1907 500 004	3.0	0.000 000	0.002
100 %		-20	1907 499 999	-2.0	0.000 000	-0.001
100 %		-10	1907 499 998	-3.3	0.000 000	-0.002
100 %		0	1907 500 004	2.3	0.000 000	0.001
100 %		+10	1907 500 005	3.3	0.000 000	0.002
100 %		+30	1907 500 004	2.6	0.000 000	0.001
100 %		+40	1907 499 998	-3.1	0.000 000	-0.002
100 %		+50	1907 500 004	2.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1907 500 004	2.4	0.000 000	0.001

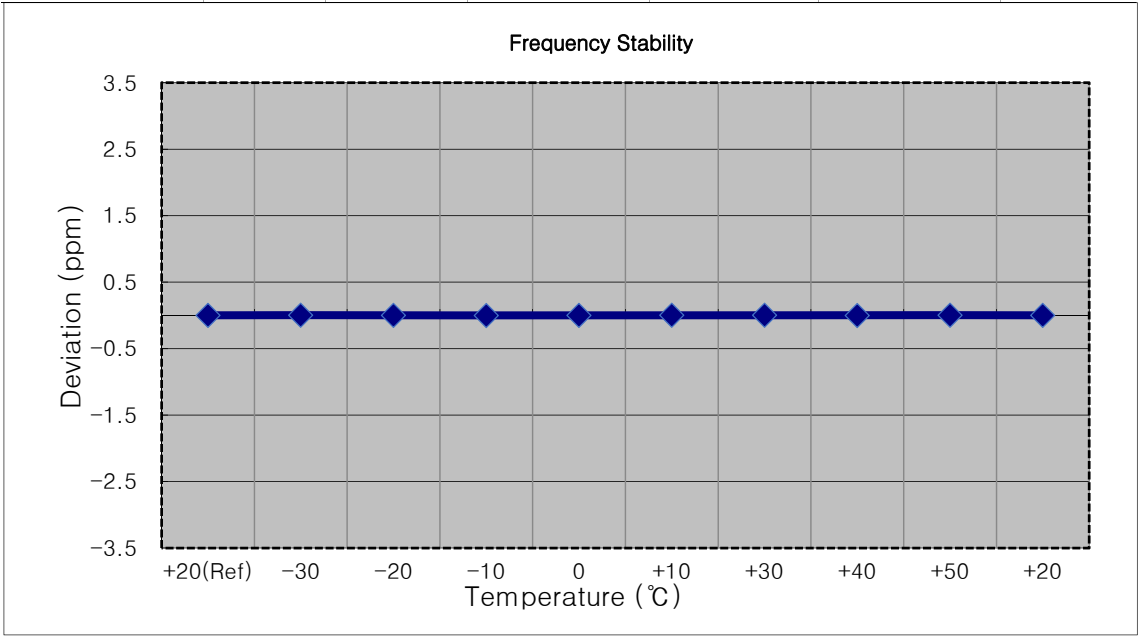

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1905,000,000 Hz

▣ CHANNEL: 19150 (10 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1905 000 002	0.0	0.000 000	0.000
100 %		-30	1905 000 005	3.1	0.000 000	0.002
100 %		-20	1905 000 005	2.8	0.000 000	0.001
100 %		-10	1905 000 004	1.6	0.000 000	0.001
100 %		0	1905 000 004	1.9	0.000 000	0.001
100 %		+10	1905 000 005	2.7	0.000 000	0.001
100 %		+30	1905 000 005	2.3	0.000 000	0.001
100 %		+40	1905 000 004	1.3	0.000 000	0.001
100 %		+50	1905 000 004	2.1	0.000 000	0.001
Batt. Endpoint	3.400	+20	1905 000 005	2.3	0.000 000	0.001

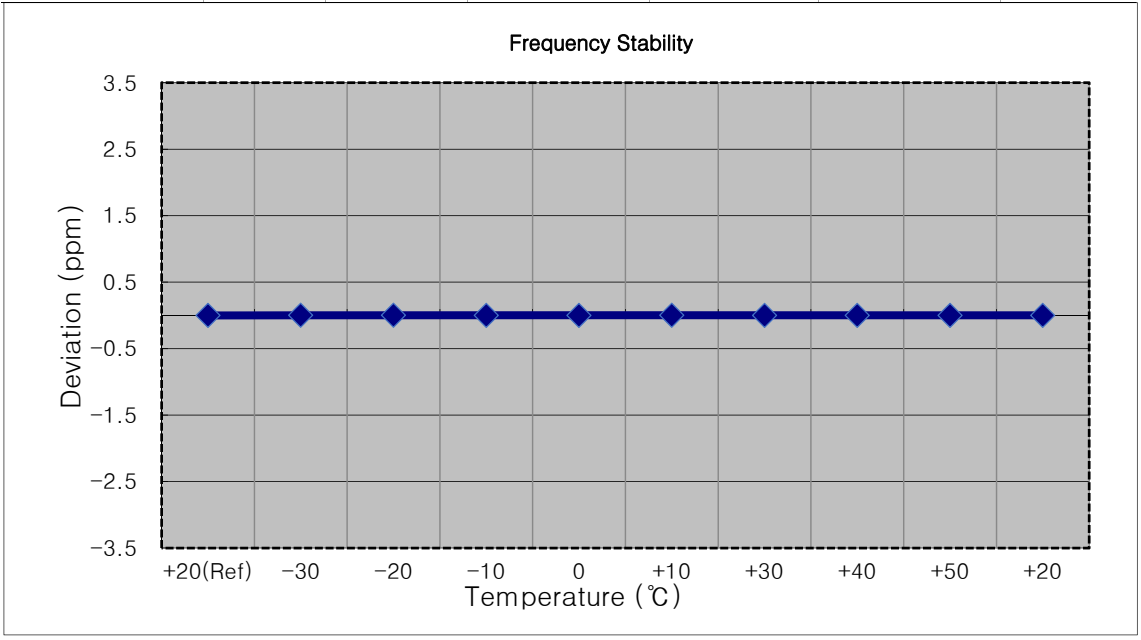

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1902,500,000 Hz

▣ CHANNEL: 19125 (15 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1902 500 002	0.0	0.000 000	0.000
100 %		-30	1902 500 004	2.1	0.000 000	0.001
100 %		-20	1902 500 004	2.6	0.000 000	0.001
100 %		-10	1902 500 004	2.2	0.000 000	0.001
100 %		0	1902 500 003	1.8	0.000 000	0.001
100 %		+10	1902 500 004	1.9	0.000 000	0.001
100 %		+30	1902 500 005	3.4	0.000 000	0.002
100 %		+40	1902 500 004	2.4	0.000 000	0.001
100 %		+50	1902 500 003	1.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1902 500 004	2.3	0.000 000	0.001

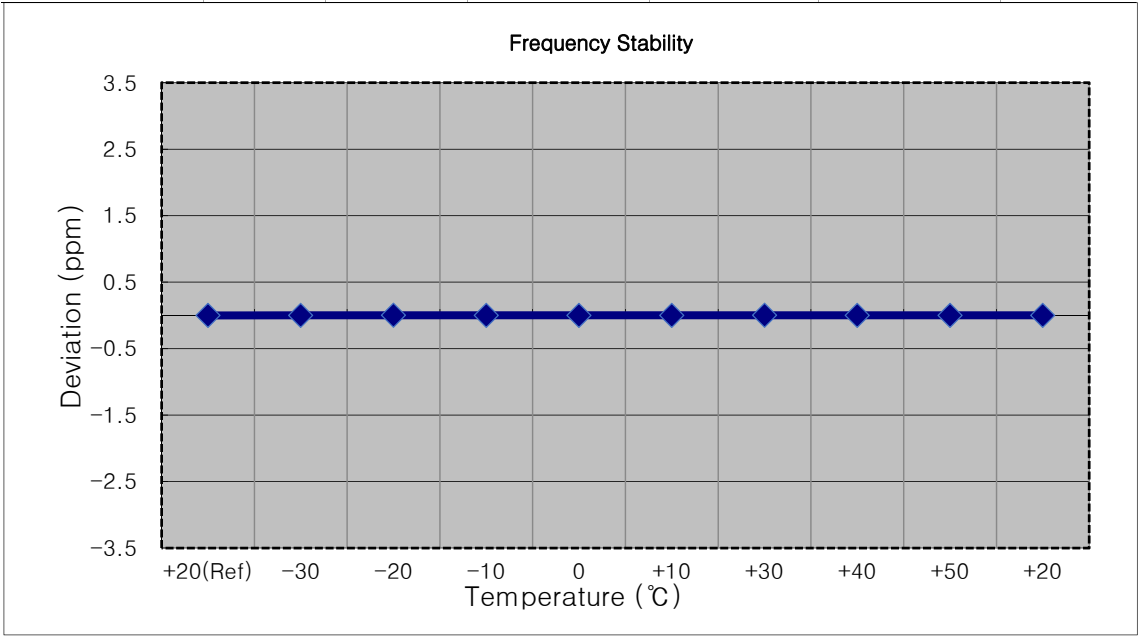

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ MODE: LTE B2

▣ OPERATING FREQUENCY: 1900,000,000 Hz

▣ CHANNEL: 19100 (20 MHz)

▣ REFERENCE VOLTAGE: 4.200 VDC

▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(℃)	(Hz)	Error (Hz)	(%)	
100 %	4.200	+20(Ref)	1900 000 002	0.0	0.000 000	0.000
100 %		-30	1900 000 004	1.6	0.000 000	0.001
100 %		-20	1900 000 004	2.1	0.000 000	0.001
100 %		-10	1900 000 005	2.6	0.000 000	0.001
100 %		0	1900 000 005	2.9	0.000 000	0.002
100 %		+10	1900 000 004	1.8	0.000 000	0.001
100 %		+30	1900 000 005	2.8	0.000 000	0.001
100 %		+40	1900 000 003	1.4	0.000 000	0.001
100 %		+50	1900 000 004	1.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1900 000 004	2.1	0.000 000	0.001

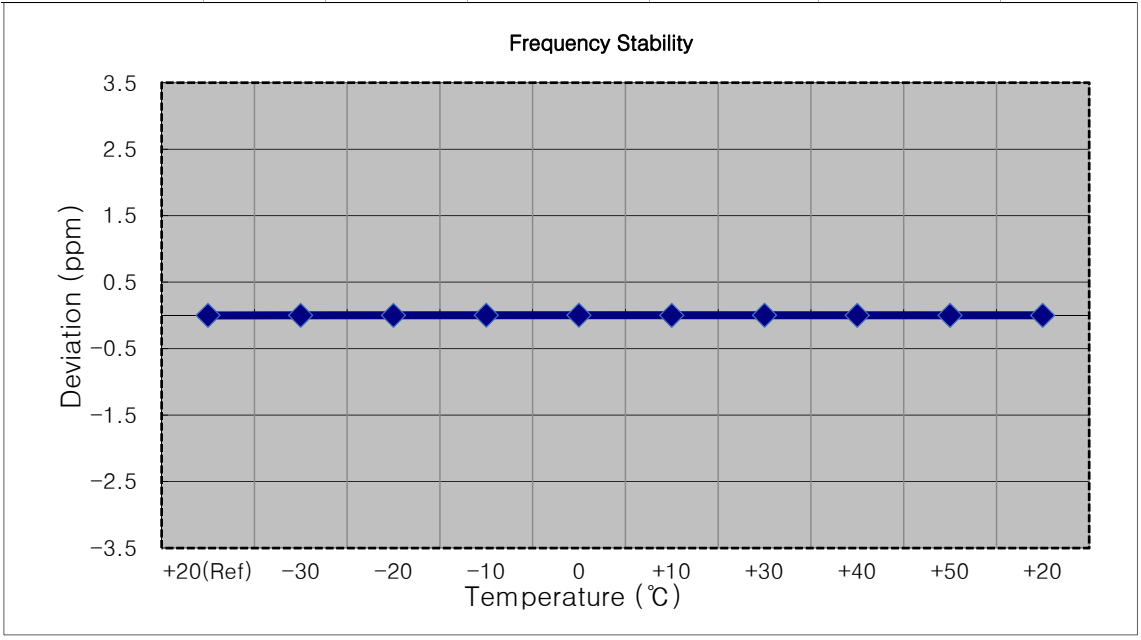

The report shall not be (partly) reproduced except in full without approval of the laboratory.

10. TEST PLOTS(Main 2 ANT)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_PAR_Mid_QPSK_FullRB

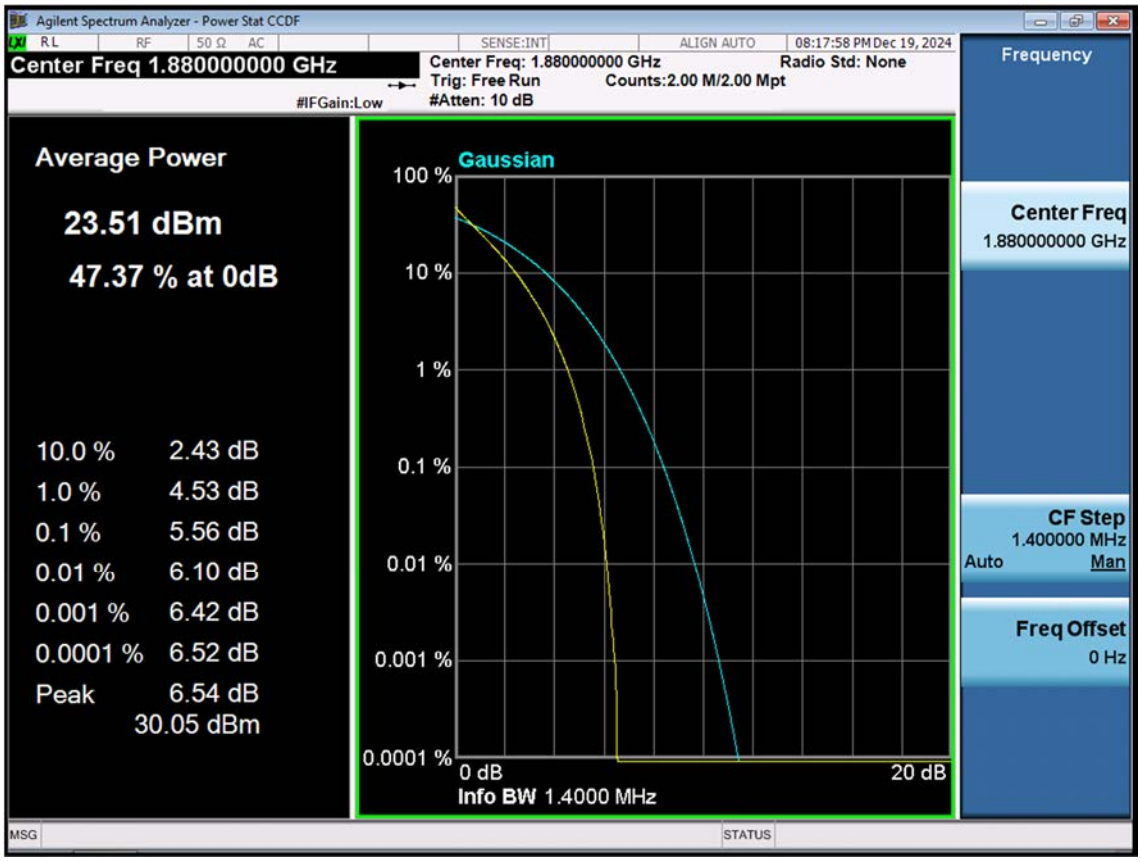

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_PAR_Mid_16QAM_FullRB

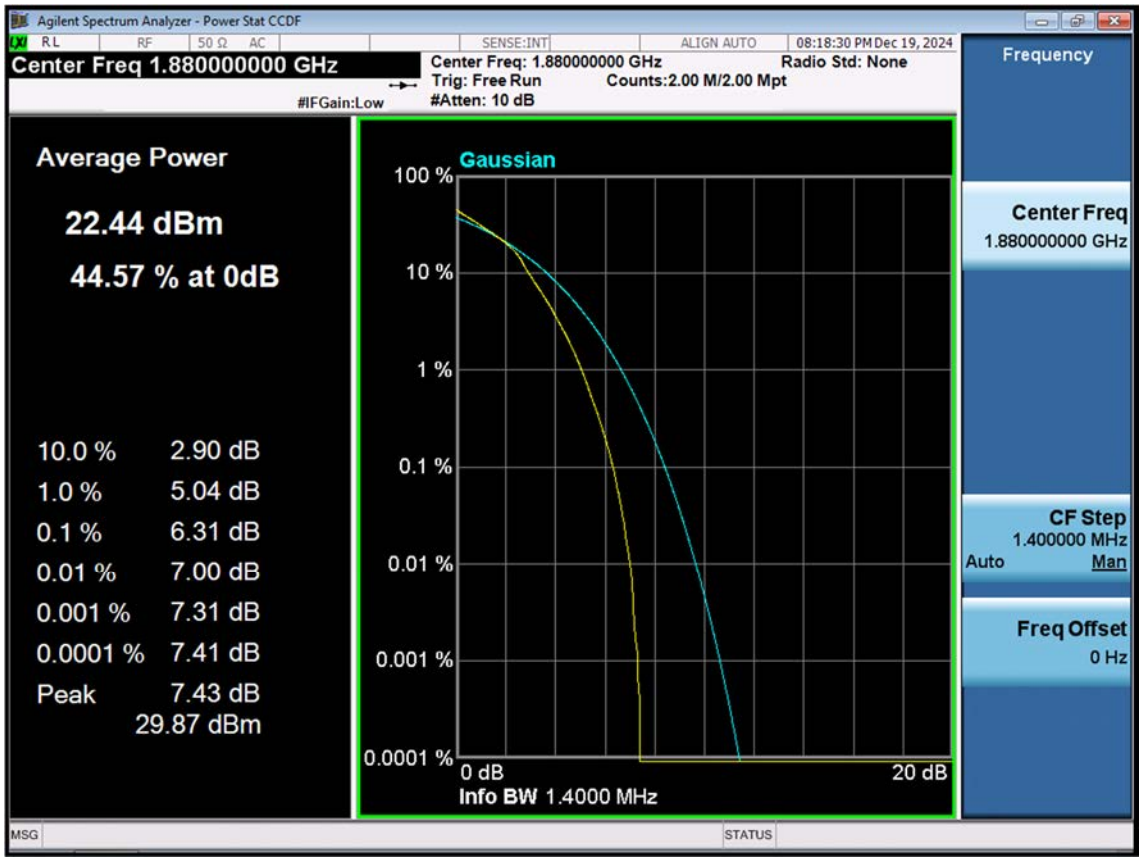

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_PAR_Mid_64QAM_FullRB

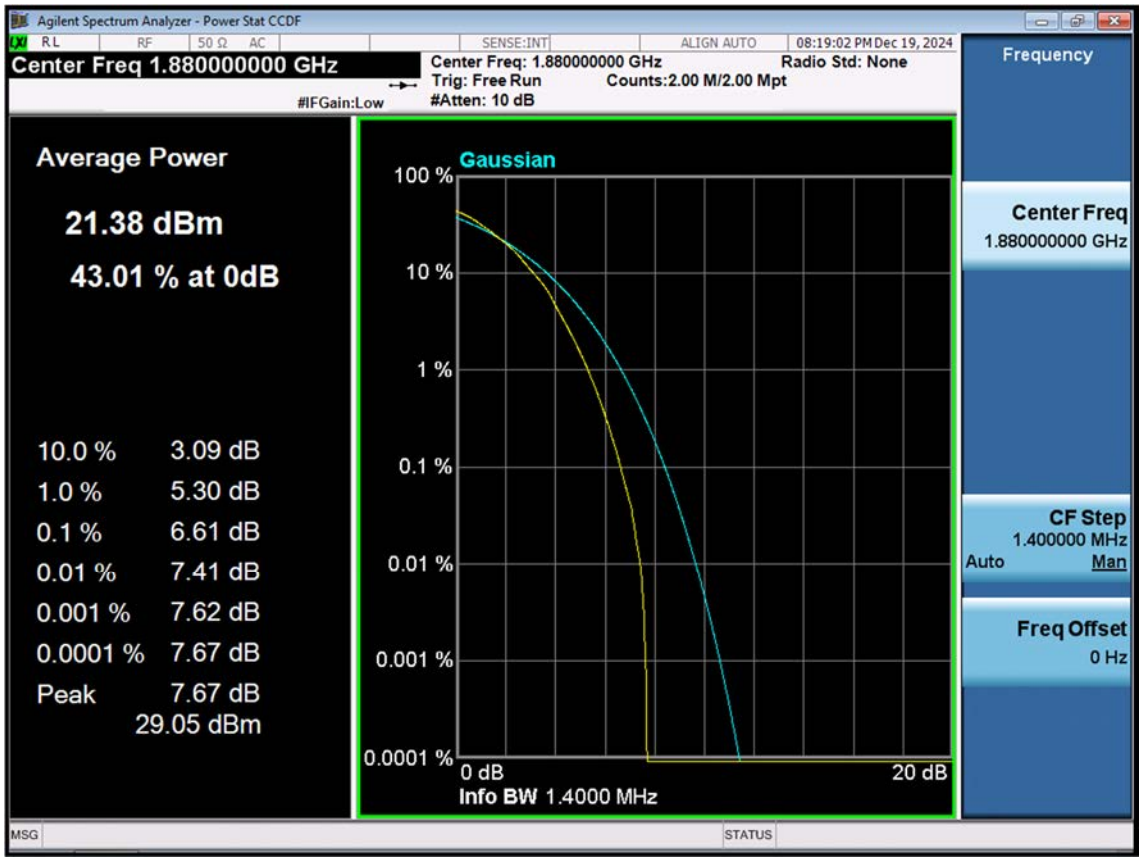

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_PAR_Mid_256QAM_FullRB

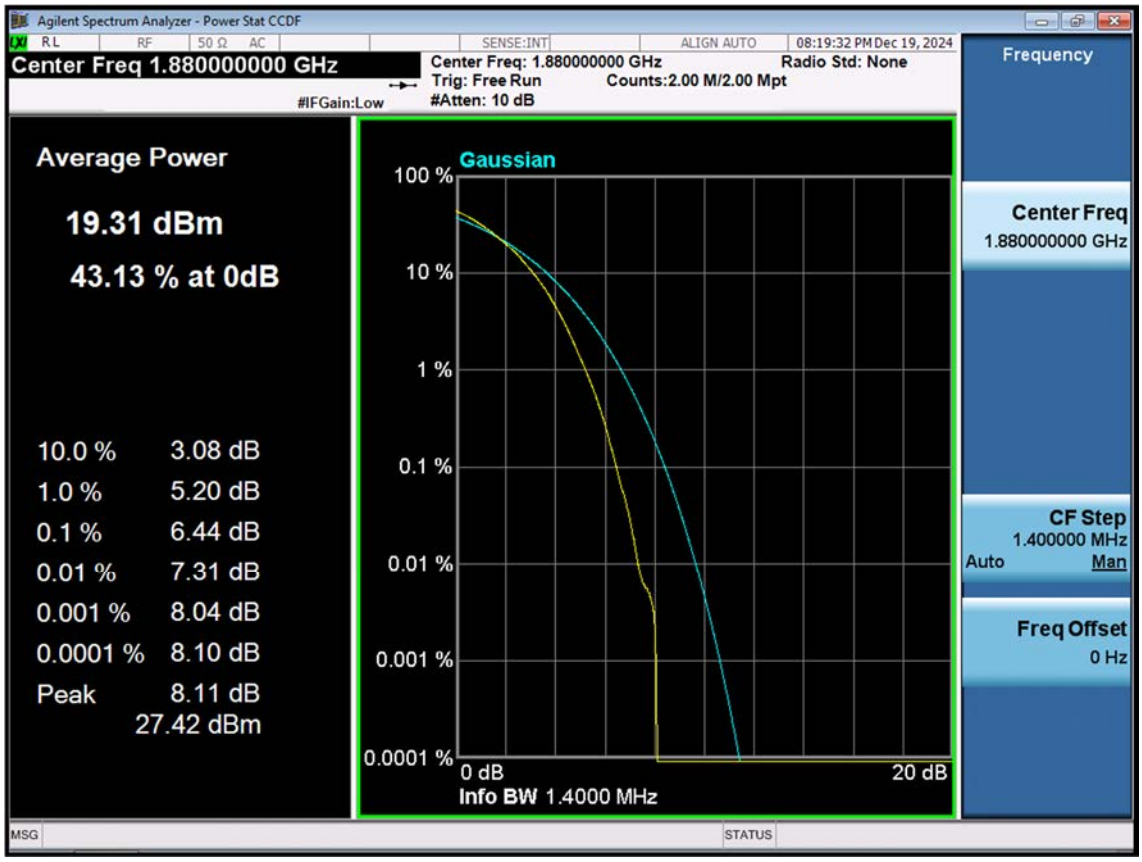

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_PAR_Mid_QPSK_FullRB

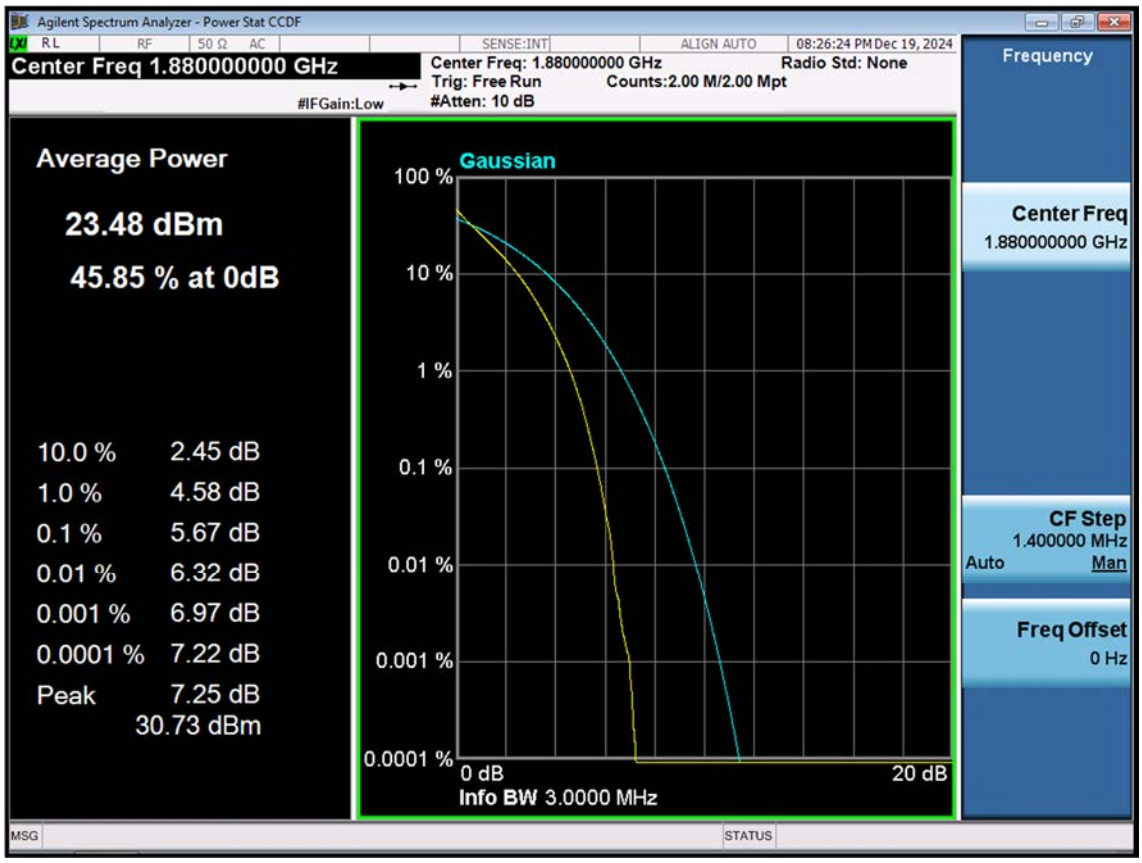

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_PAR_Mid_16QAM_FullRB

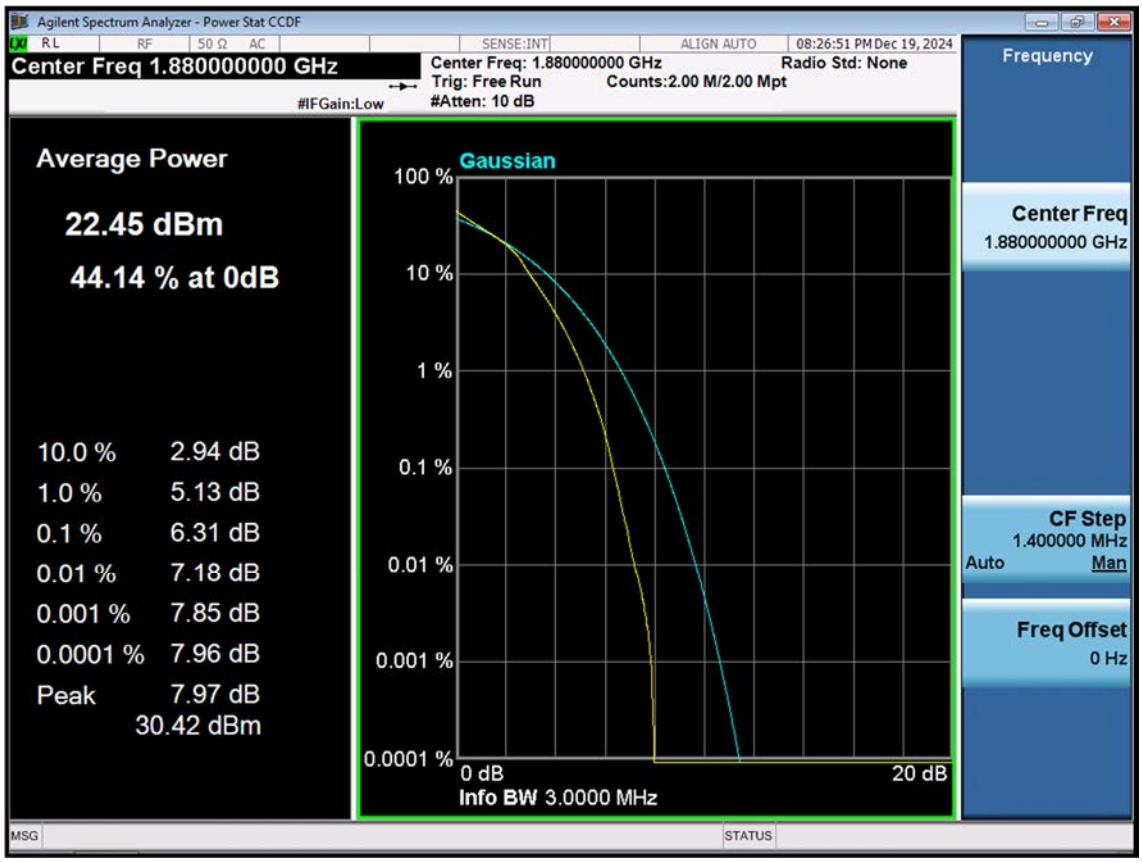

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_PAR_Mid_64QAM_FullRB

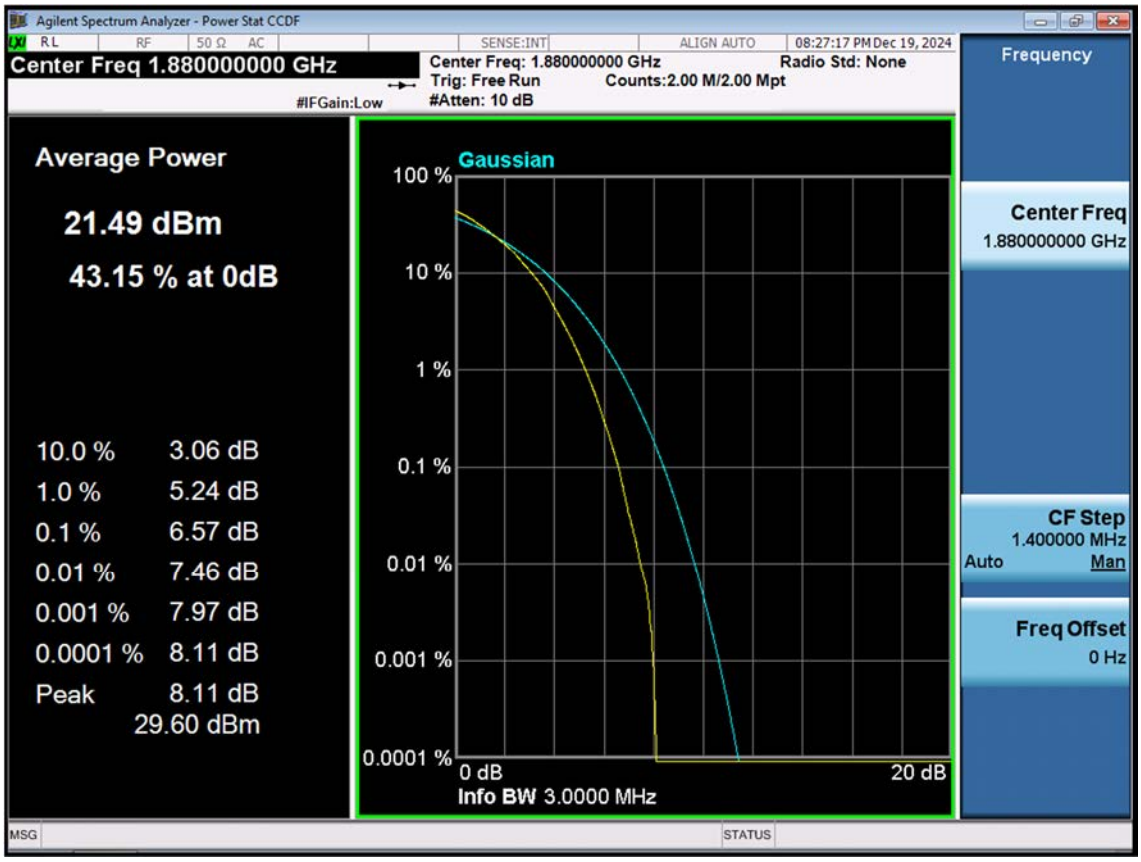

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_PAR_Mid_256QAM_FullRB

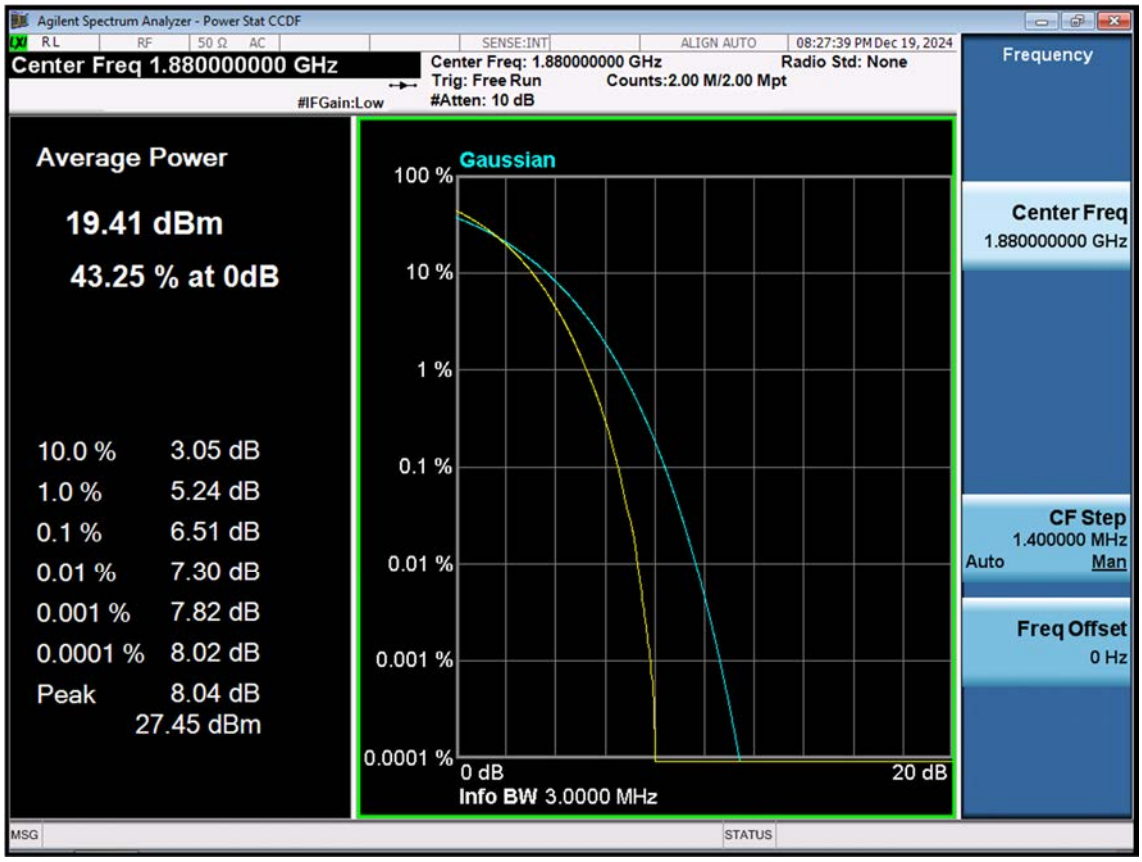

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_PAR_Mid_QPSK_FullRB

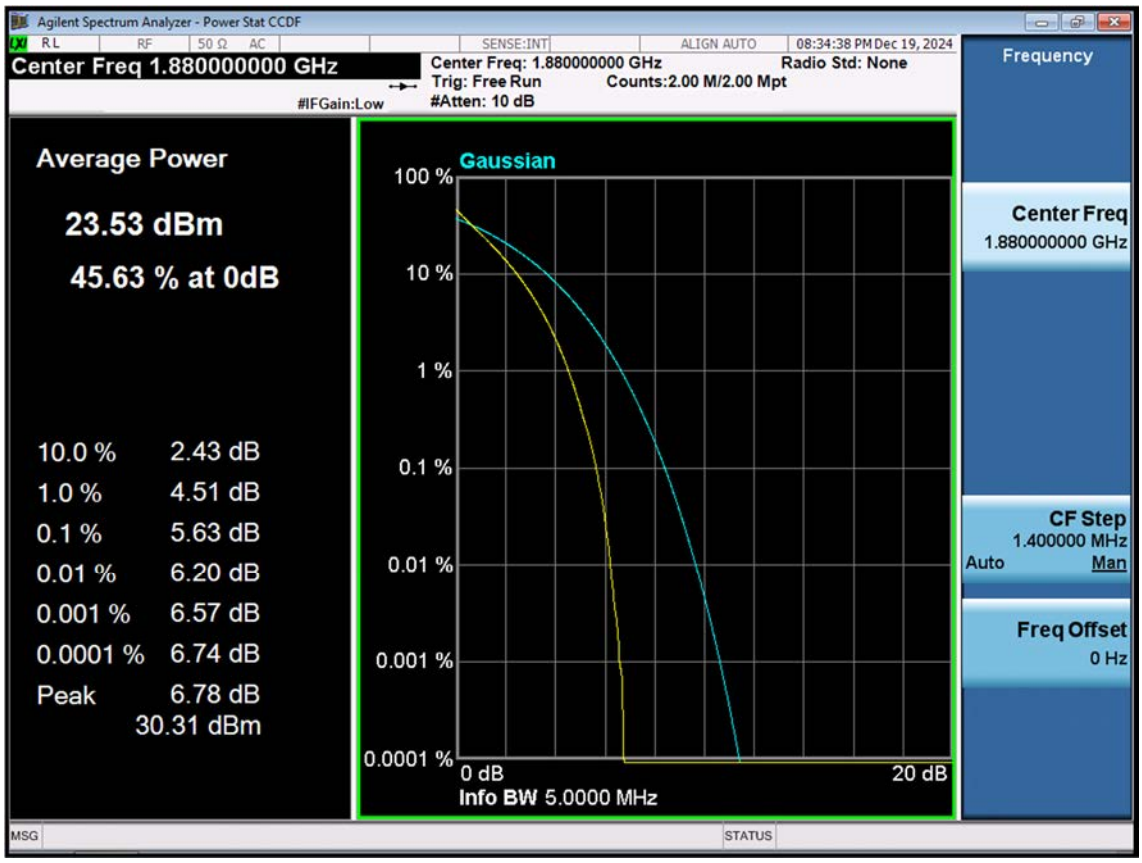

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_PAR_Mid_16QAM_FullRB

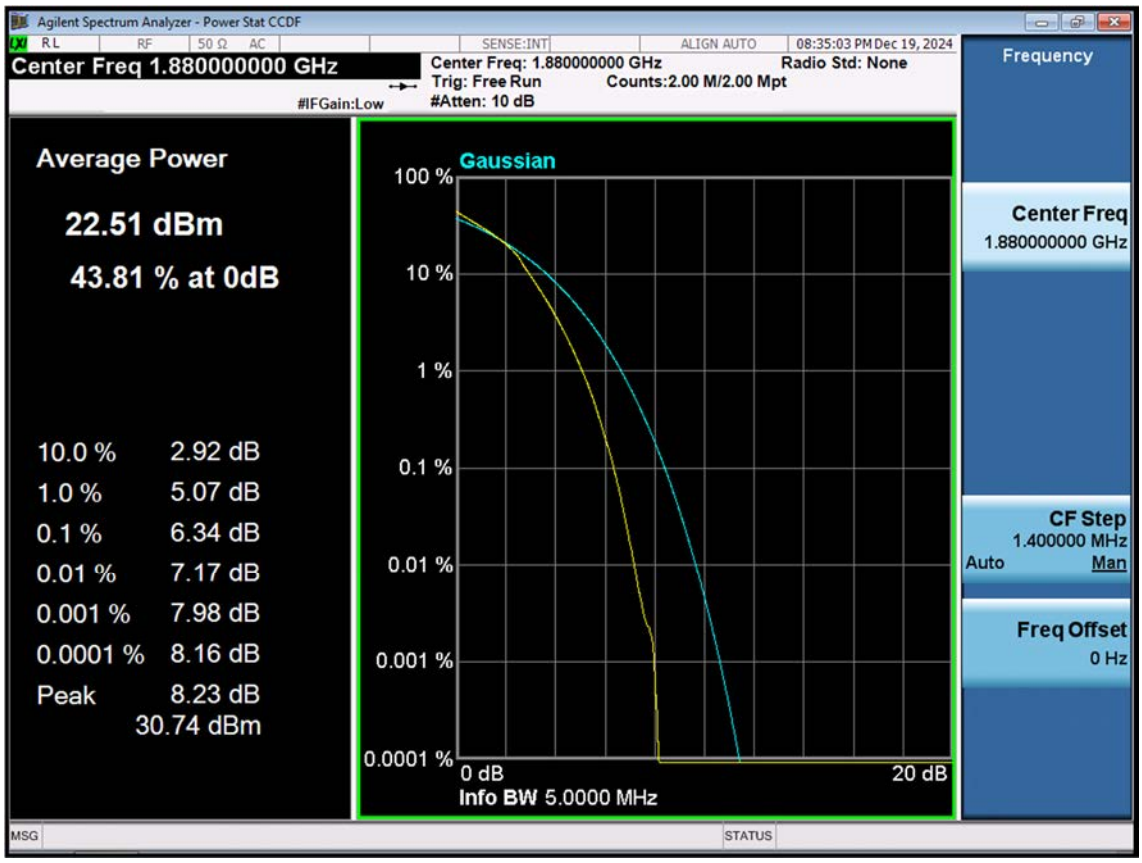

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_PAR_Mid_64QAM_FullRB

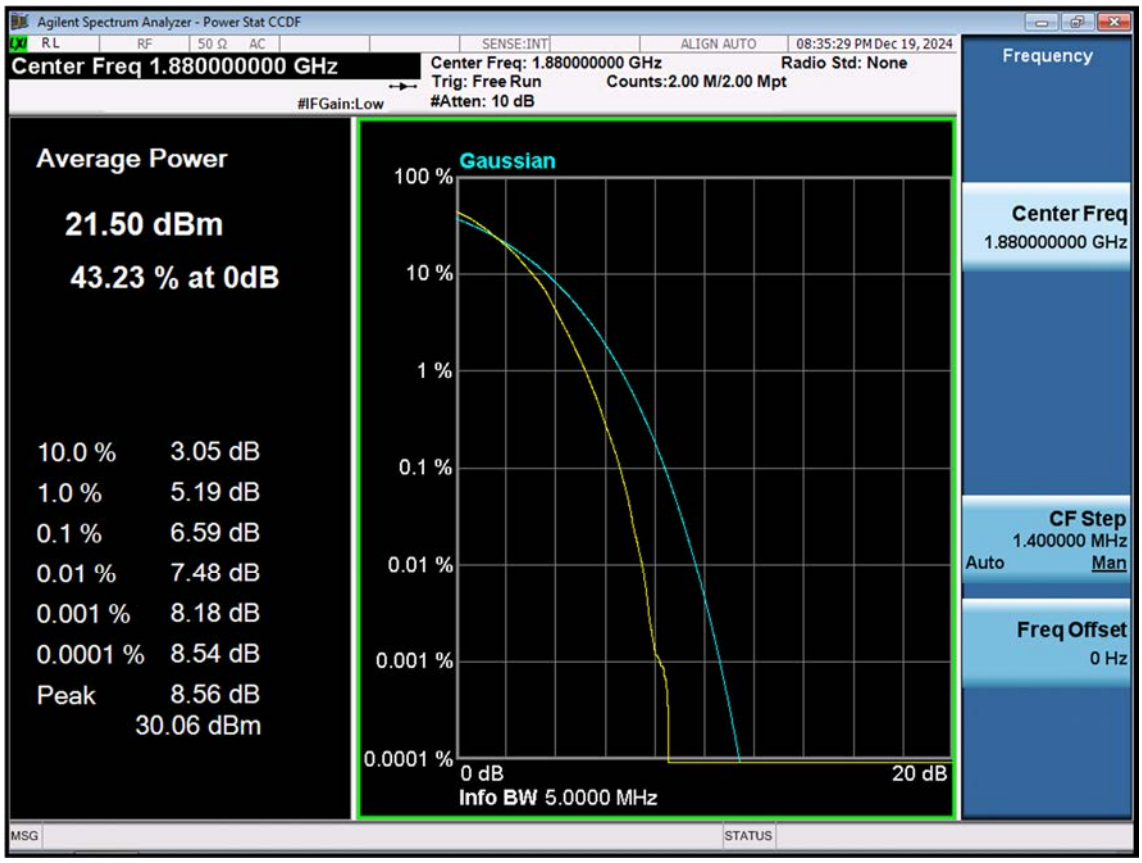

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_PAR_Mid_256QAM_FullRB

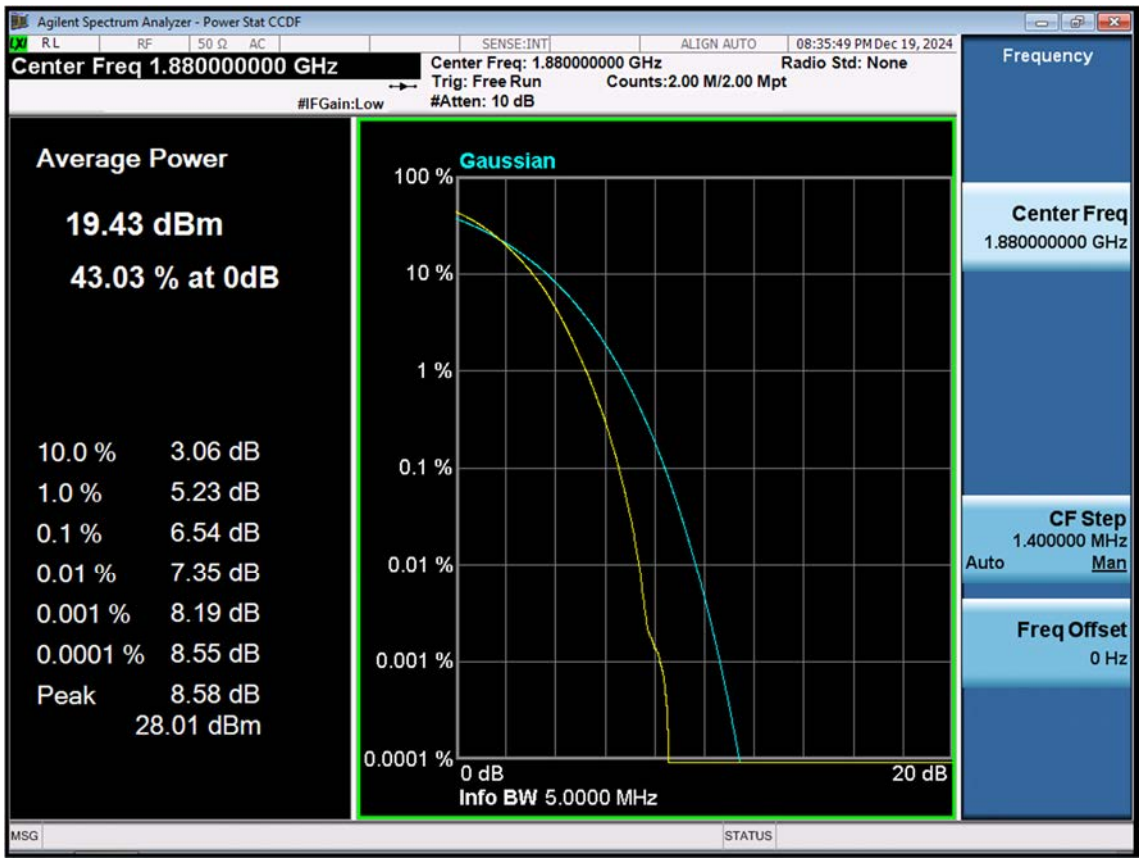

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_PAR_Mid_QPSK_FullRB

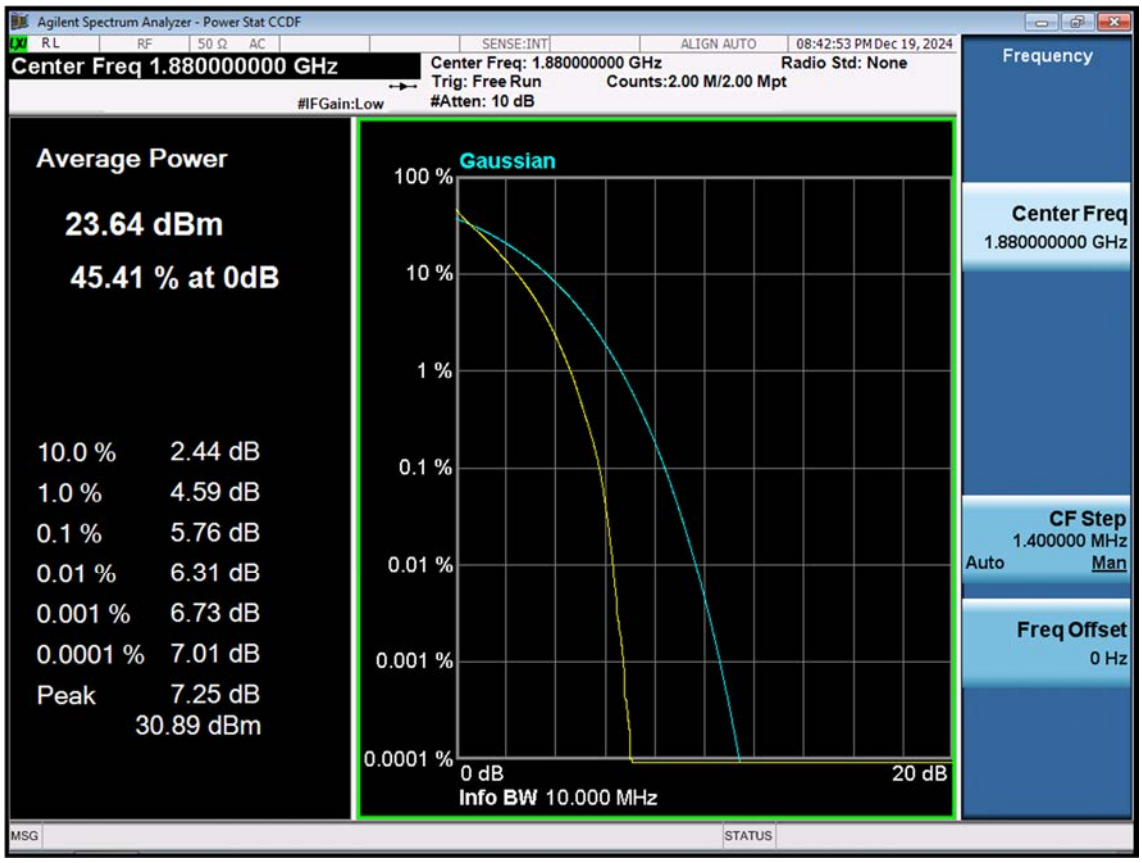

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_PAR_Mid_16QAM_FullRB

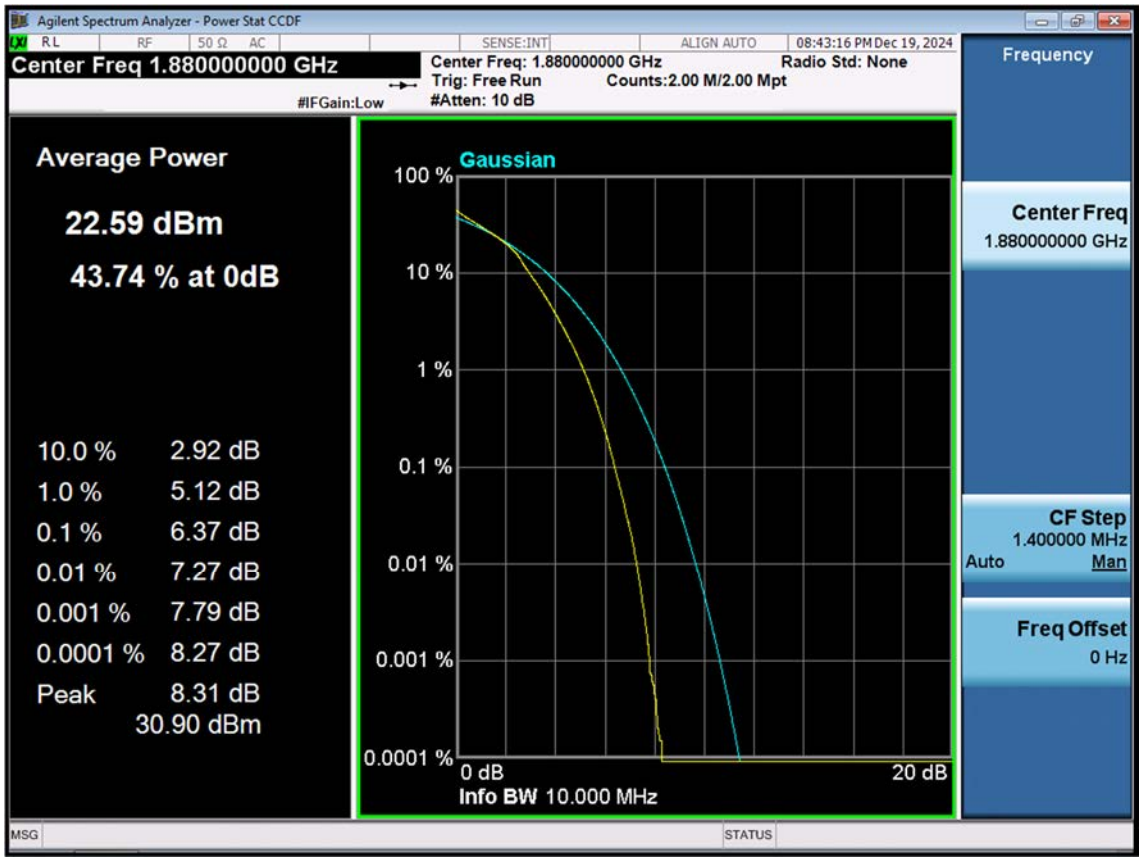

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_PAR_Mid_64QAM_FullRB

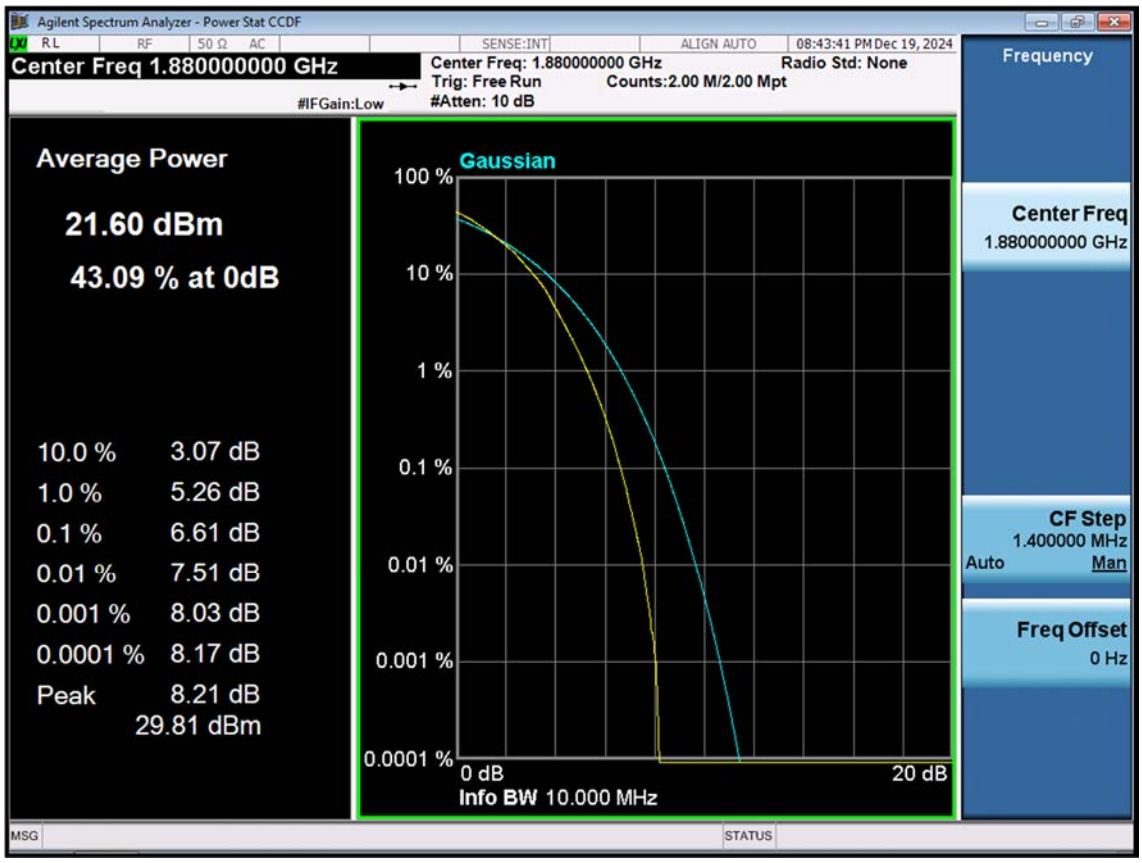

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_PAR_Mid_256QAM_FullRB

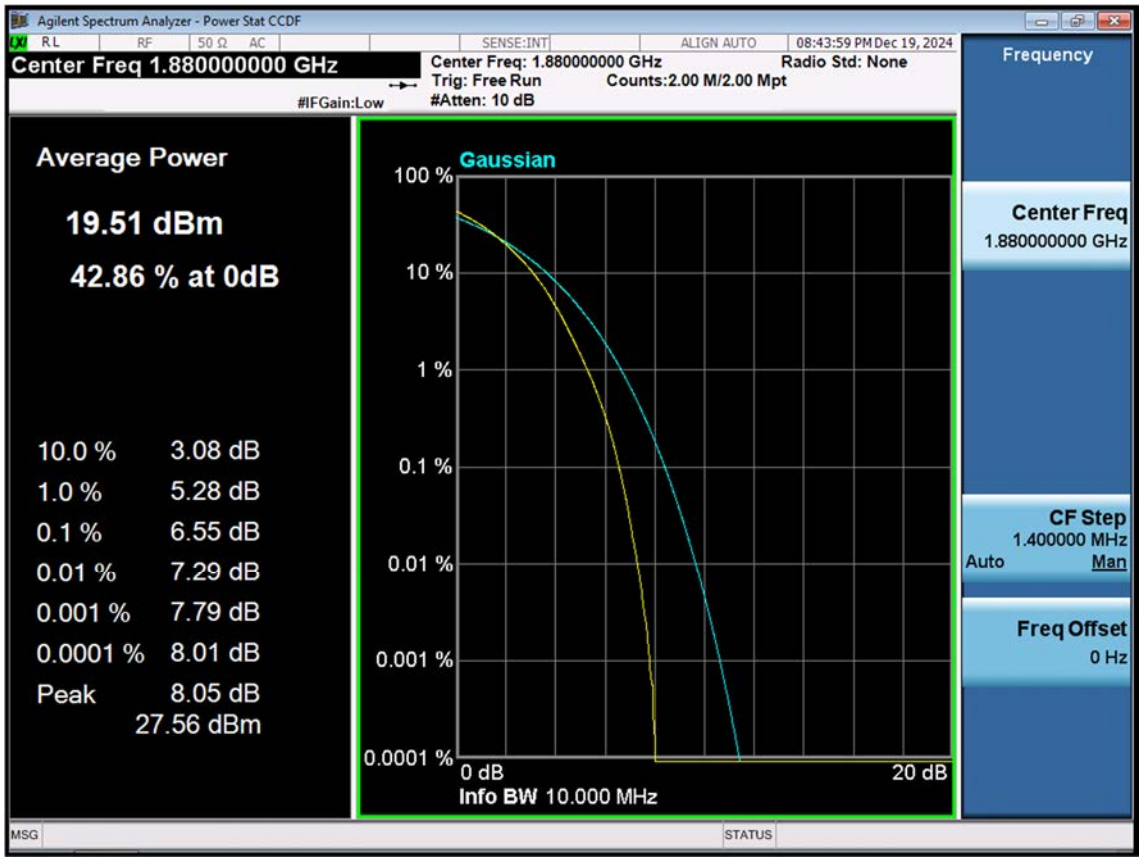

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_PAR_Mid_QPSK_FullRB

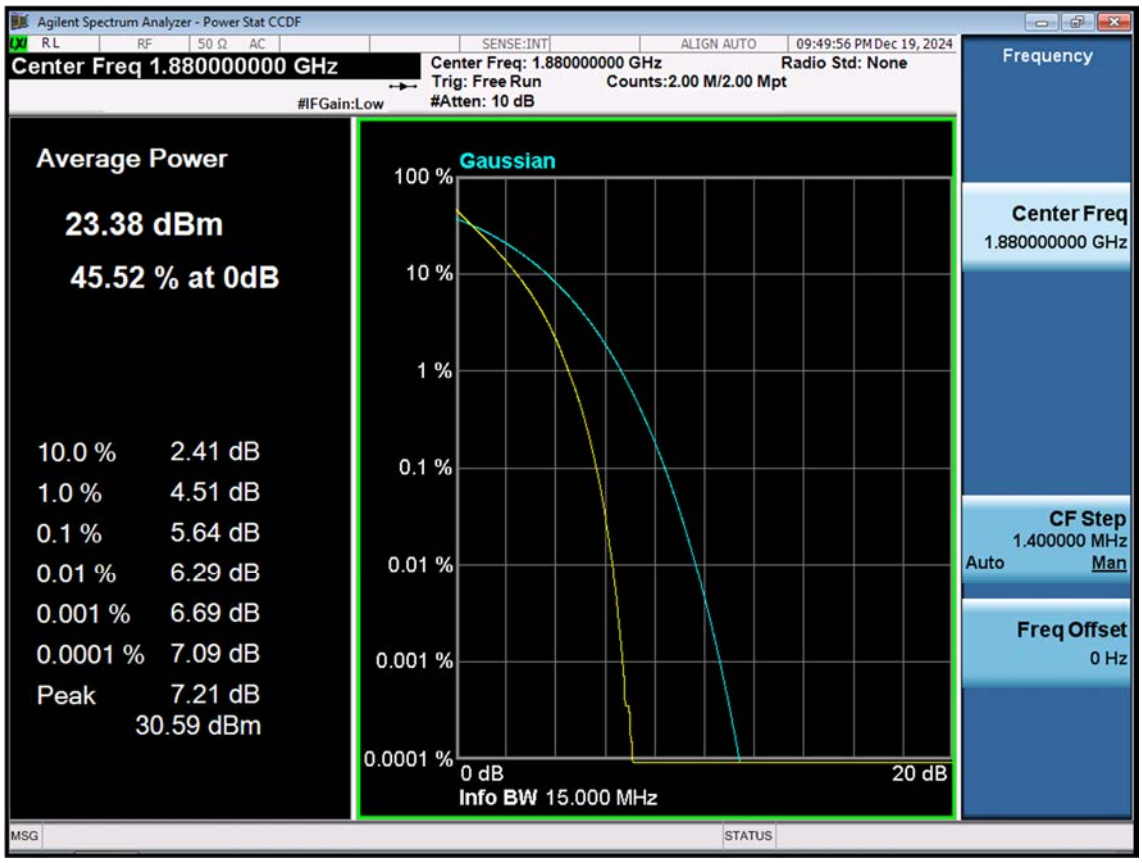

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_PAR_Mid_16QAM_FullRB

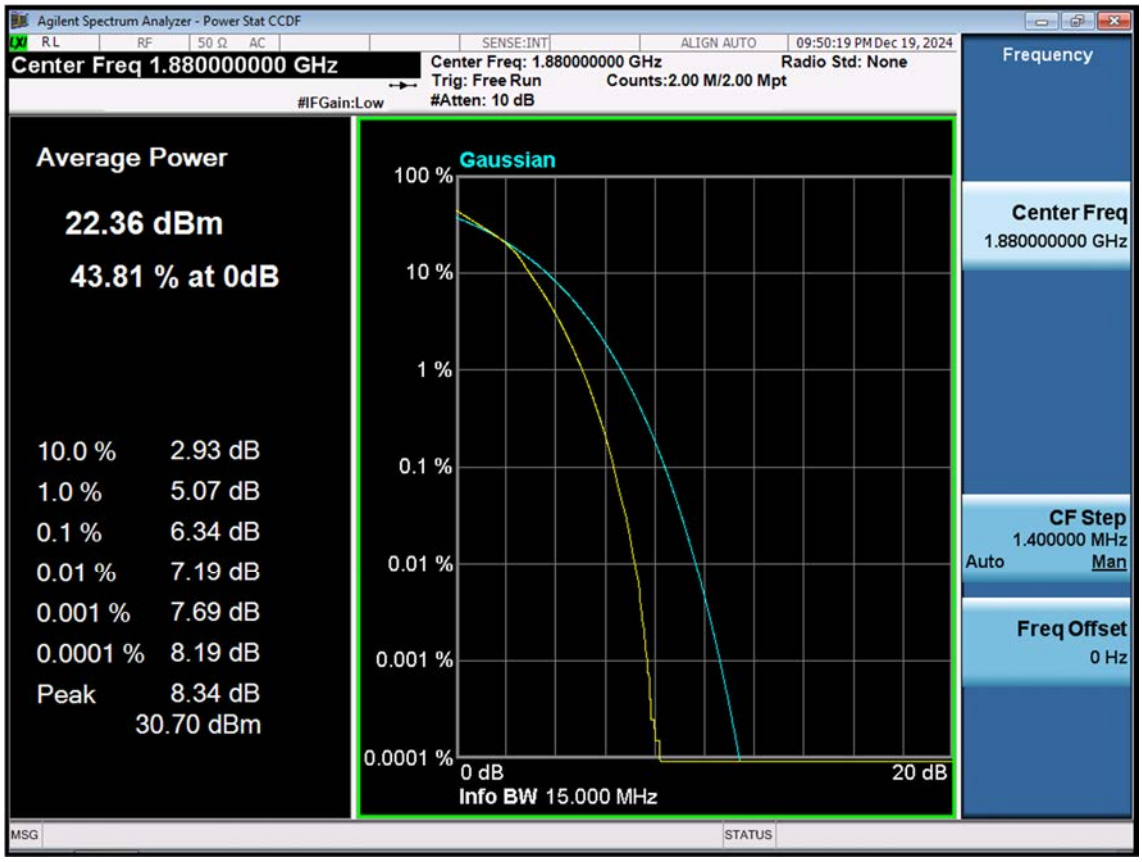

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_PAR_Mid_64QAM_FullRB

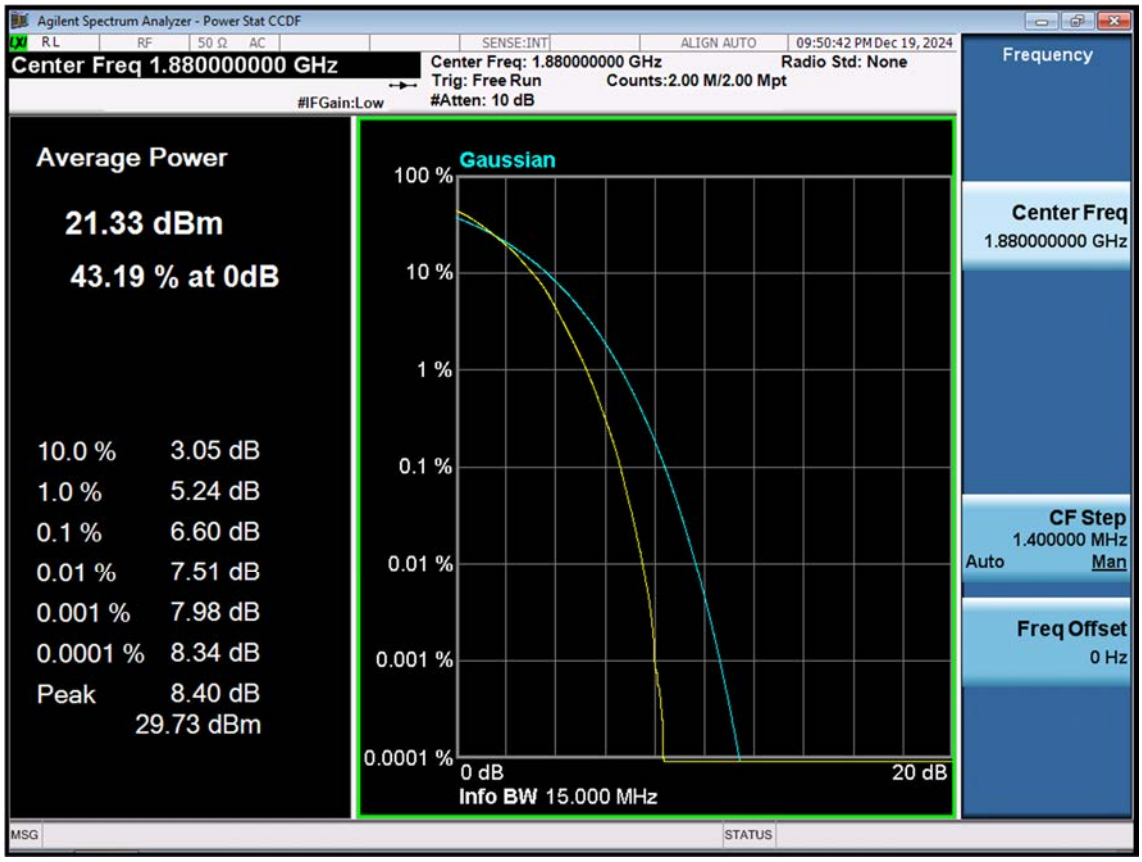

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_PAR_Mid_256QAM_FullRB

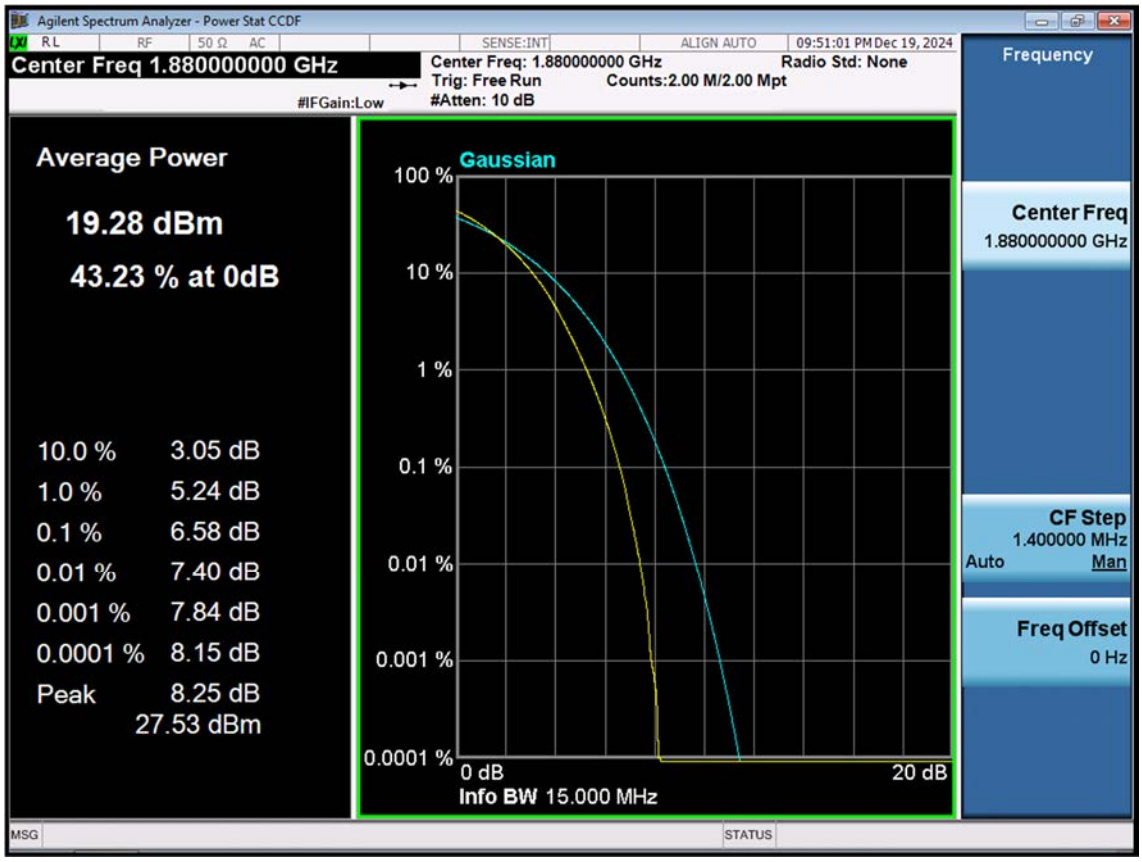

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_PAR_Mid_QPSK_FullRB

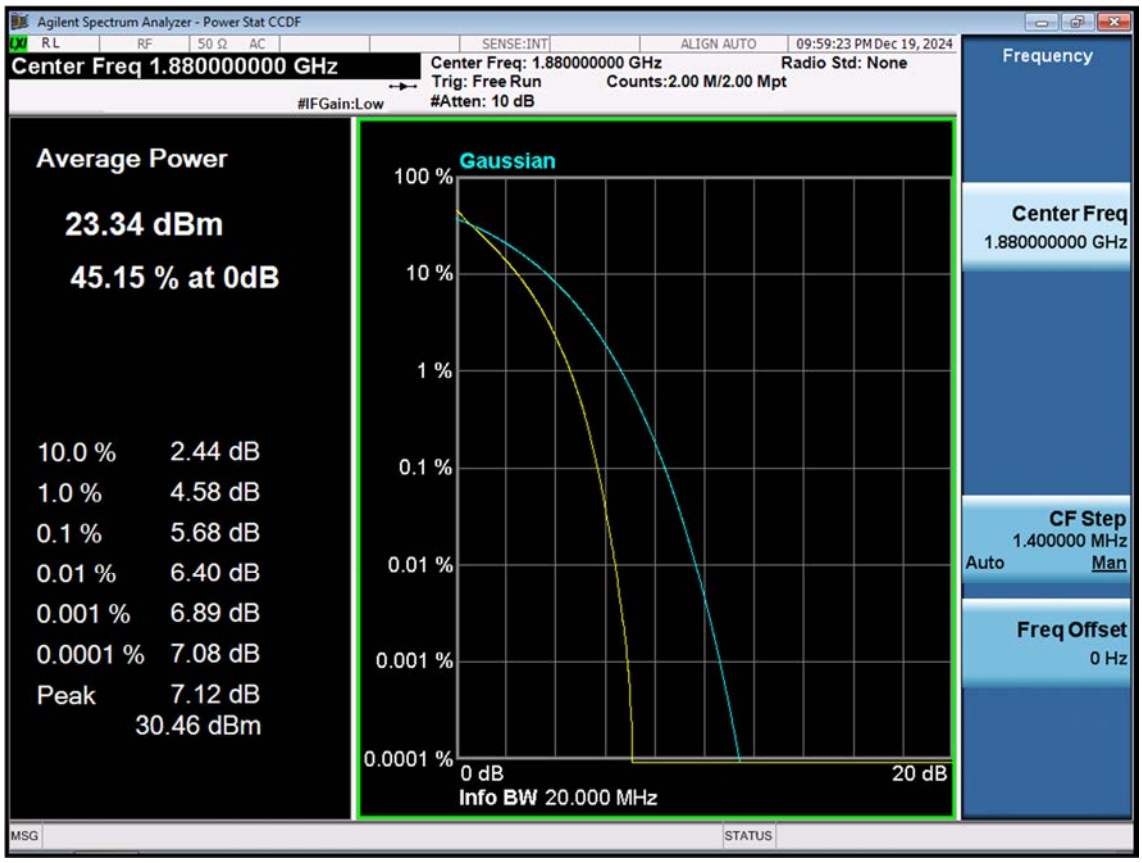

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_PAR_Mid_16QAM_FullRB

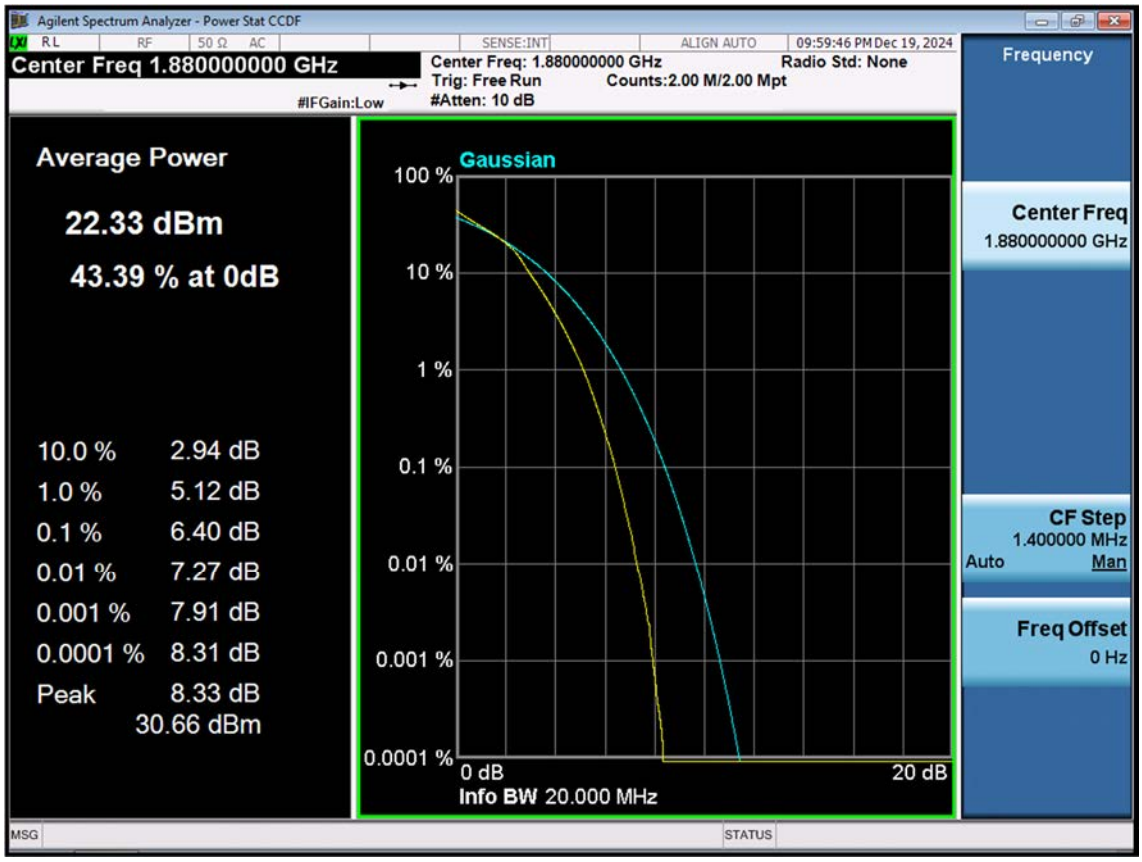

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_PAR_Mid_64QAM_FullRB

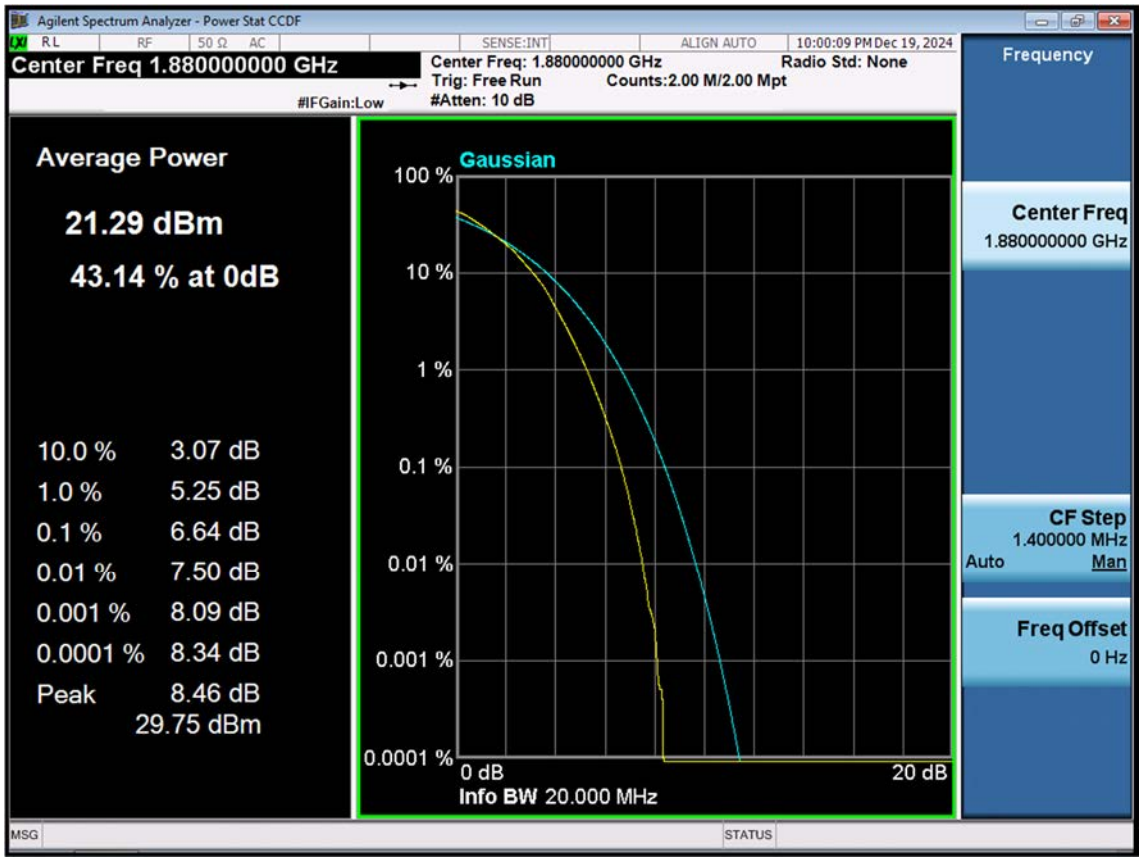

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_PAR_Mid_256QAM_FullRB

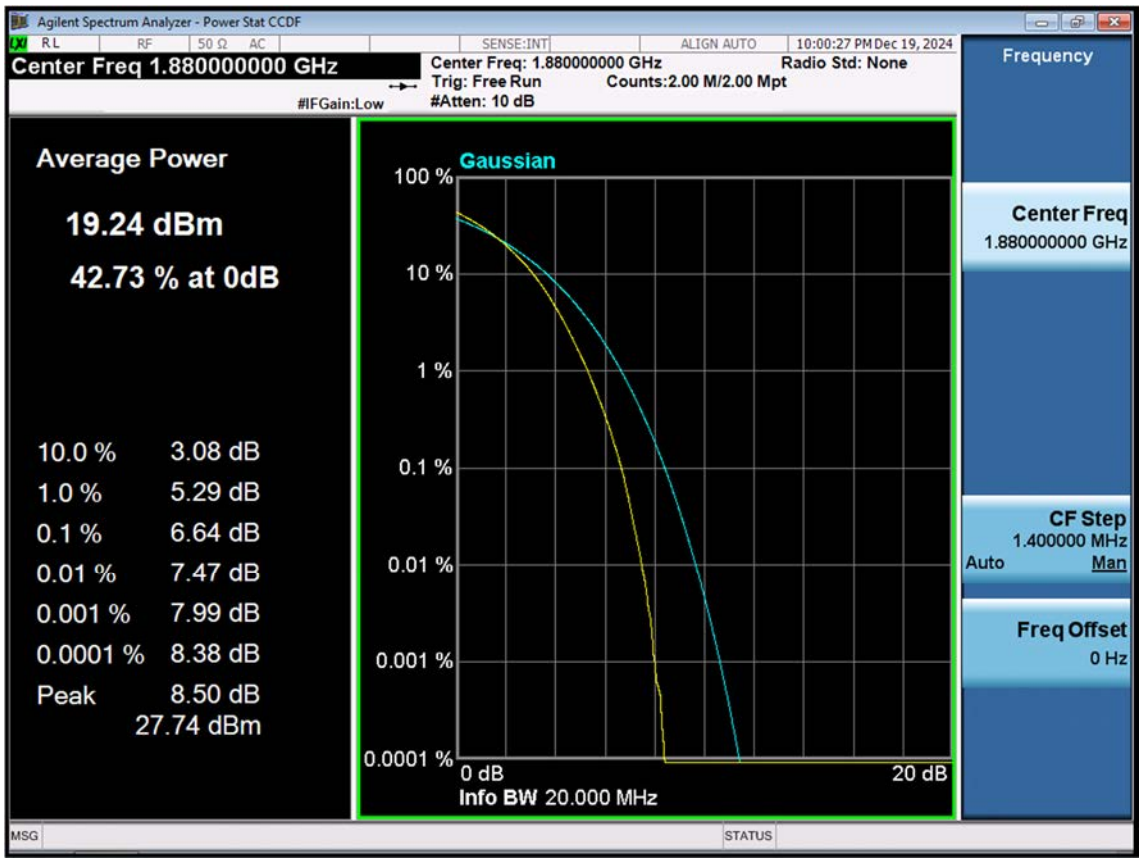

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_OBW_Mid_QPSK_FullRB

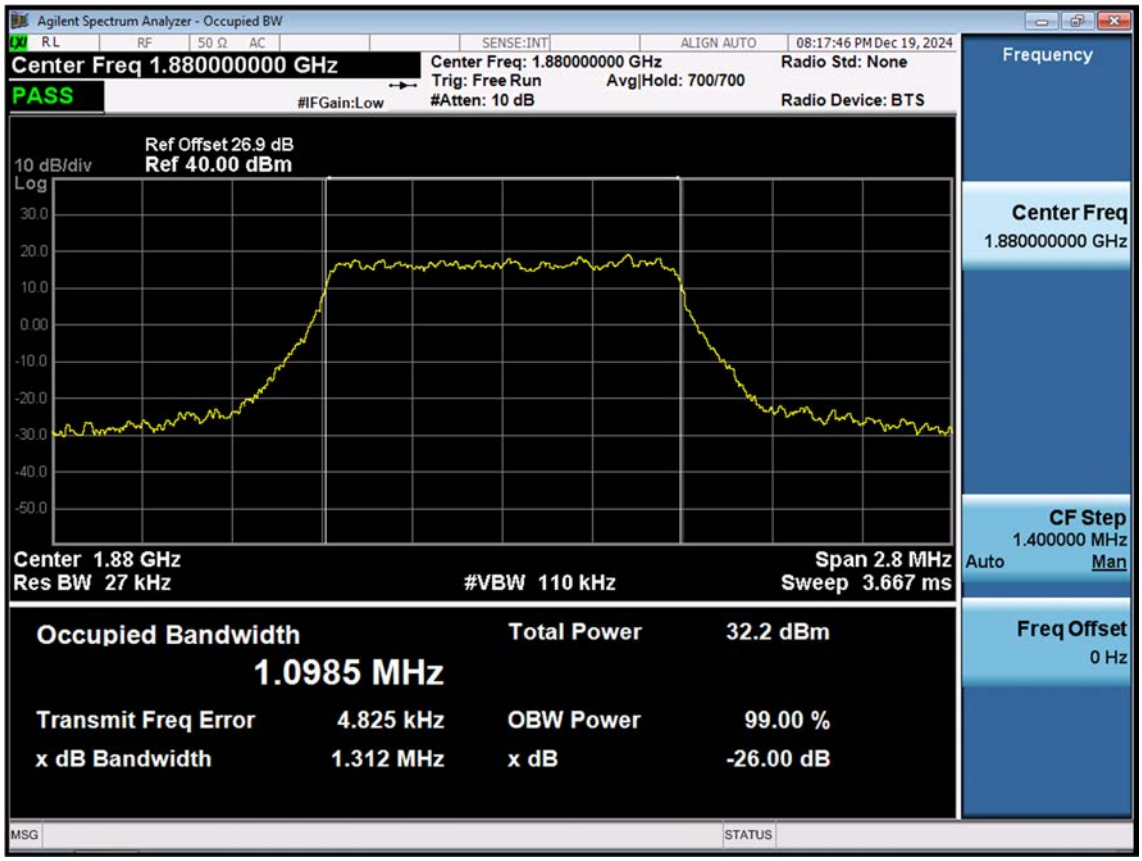

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_OBW_Mid_16QAM_FullRB

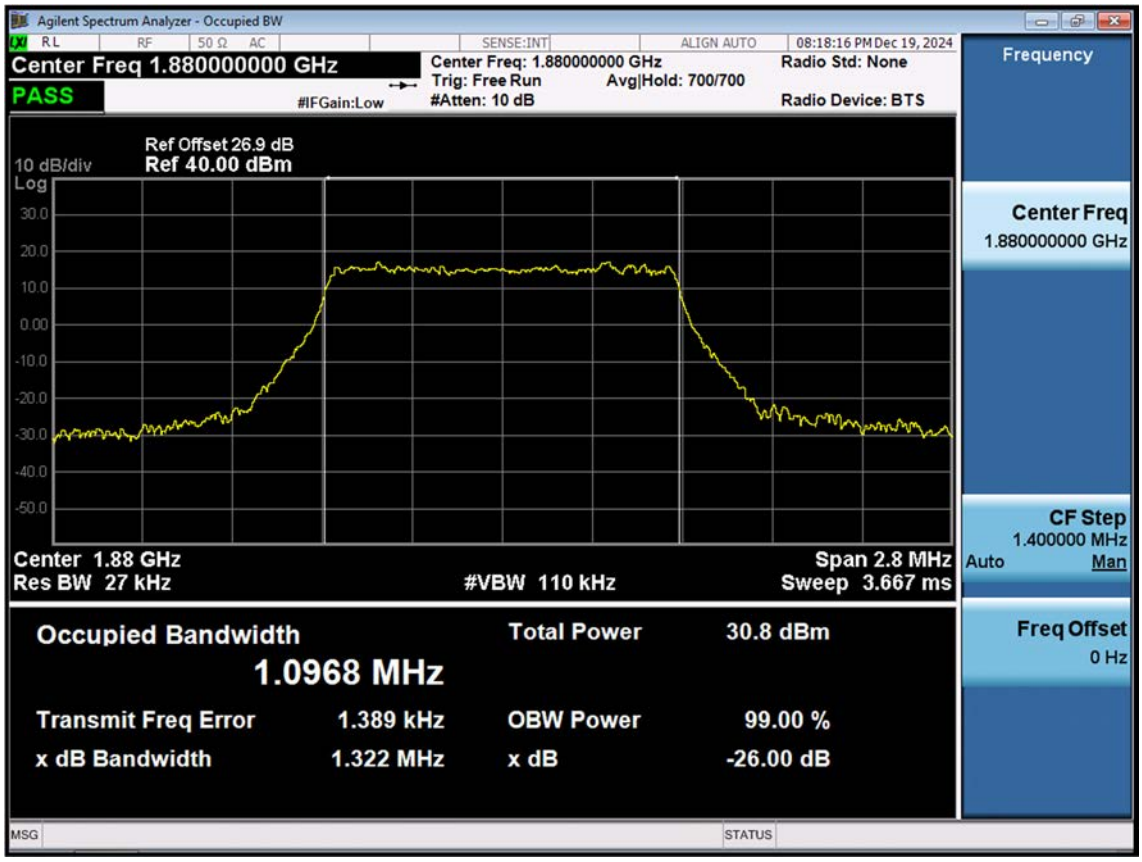

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_OBW_Mid_64QAM_FullRB

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_OBW_Mid_256QAM_FullRB

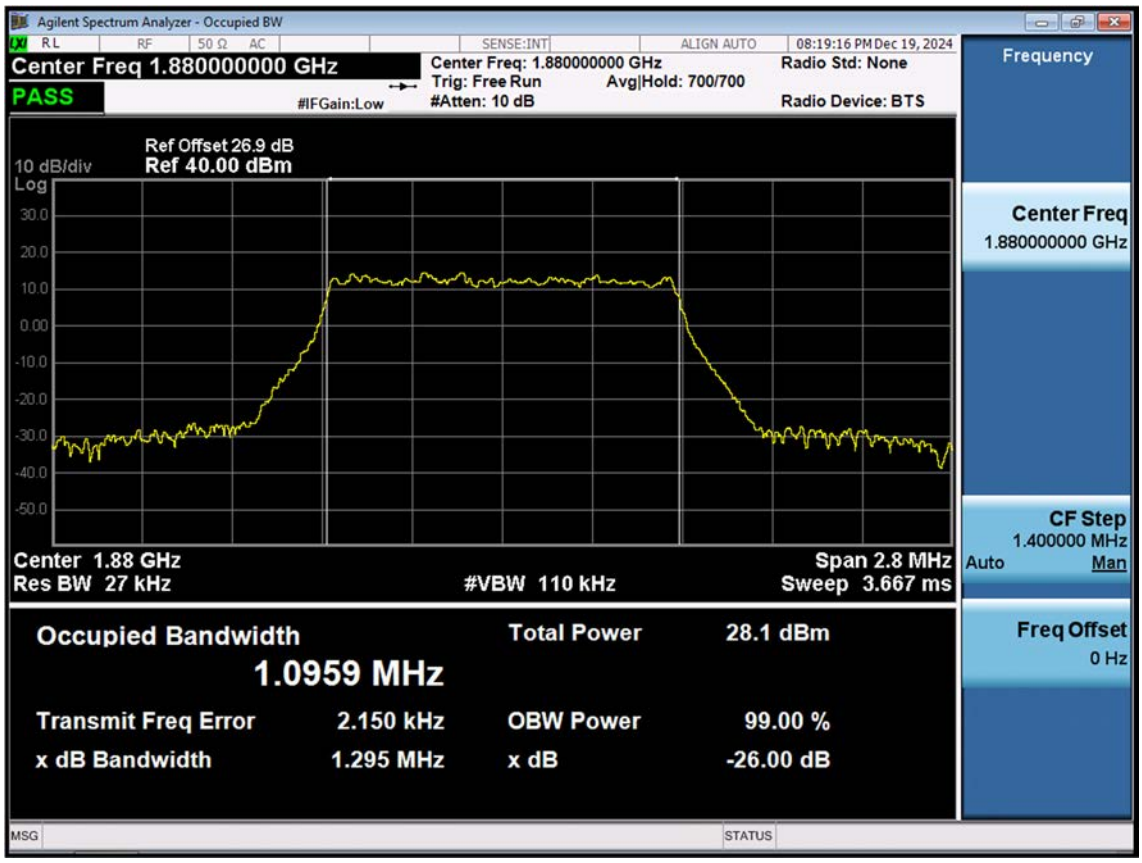

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_OBW_Mid_QPSK_FullRB

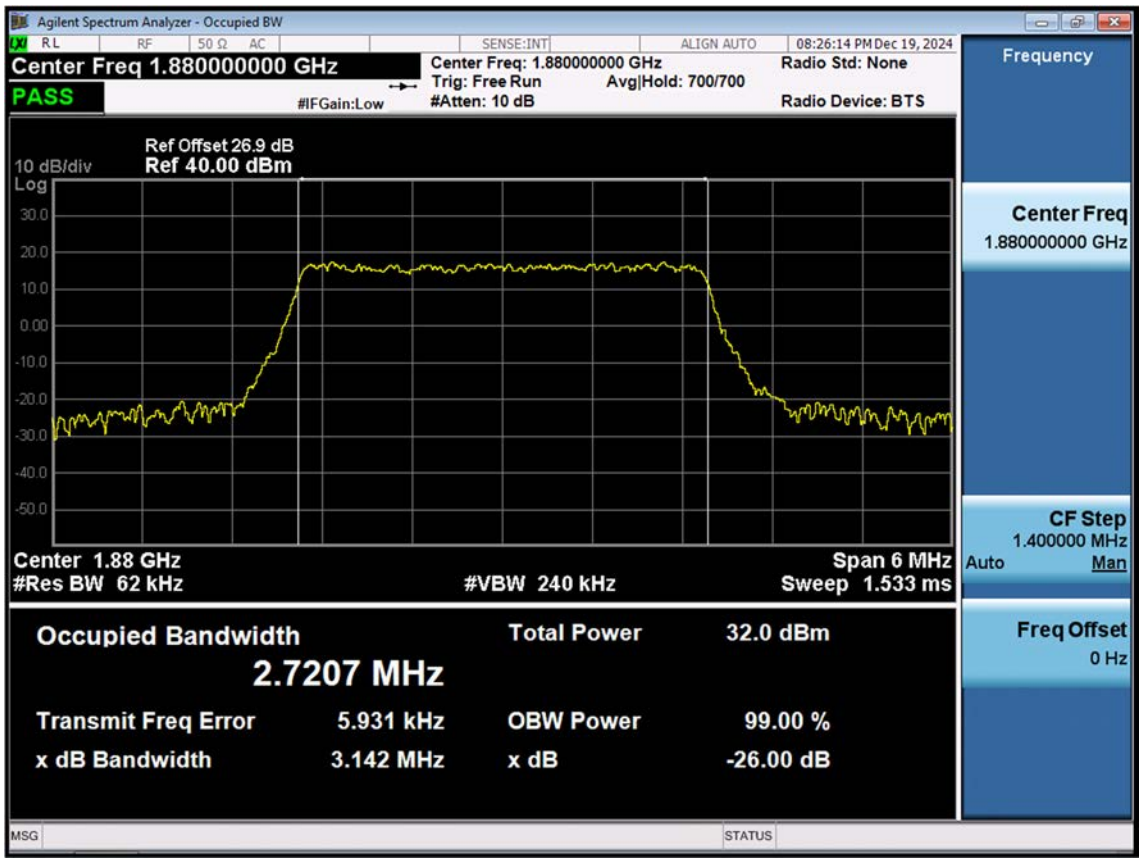

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_OBW_Mid_16QAM_FullRB

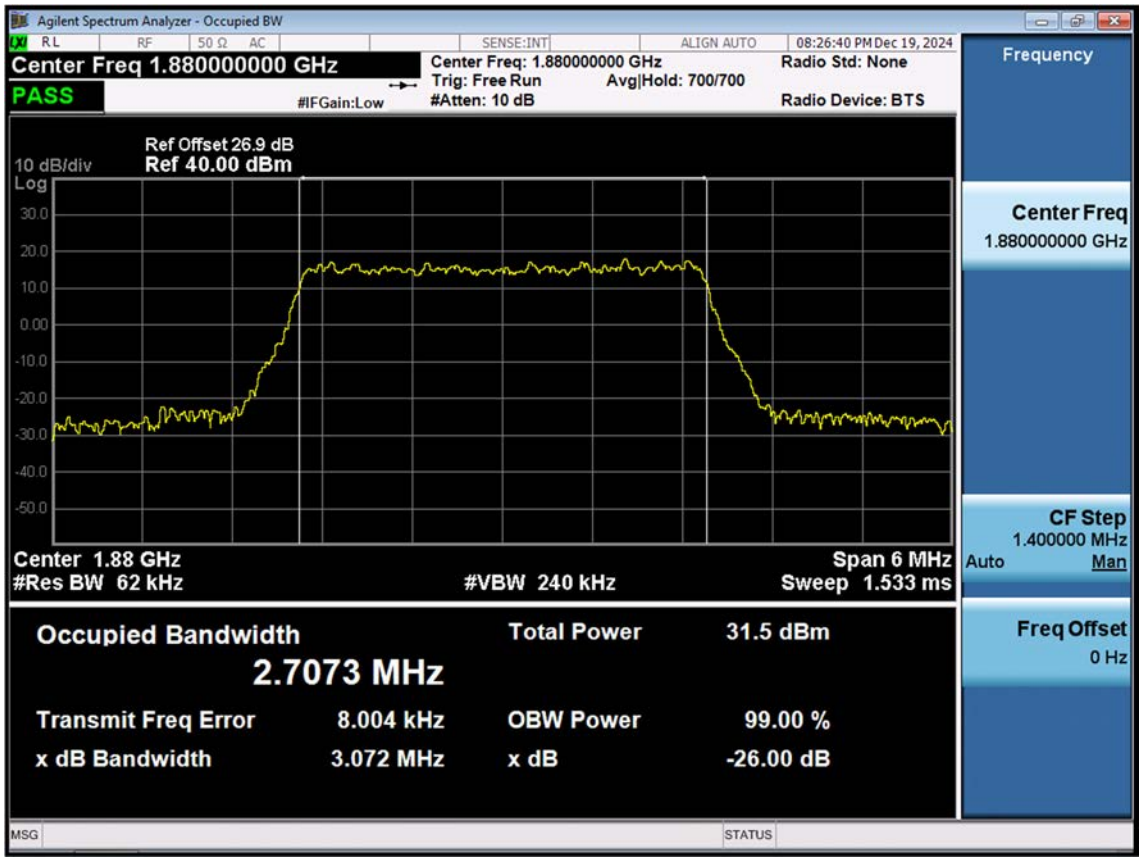

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_OBW_Mid_64QAM_FullRB

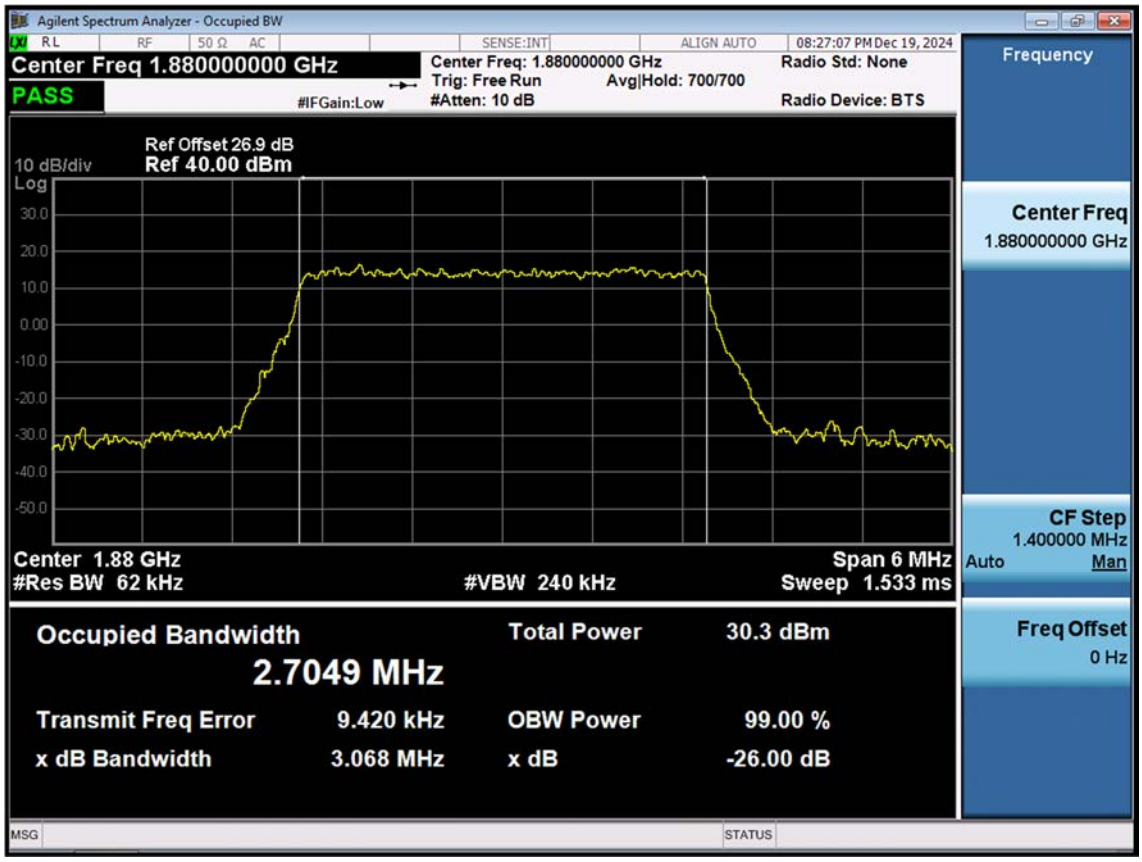

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_OBW_Mid_256QAM_FullRB

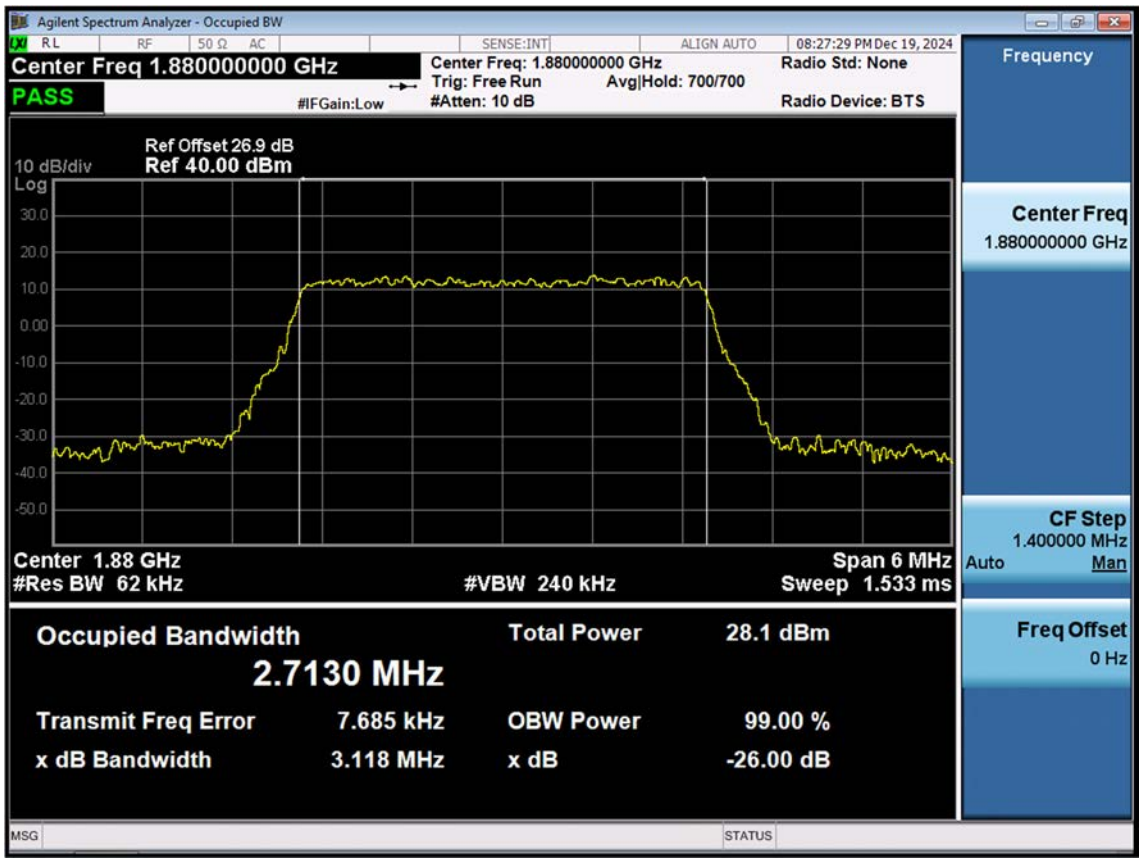

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_OBW_Mid_QPSK_FullRB

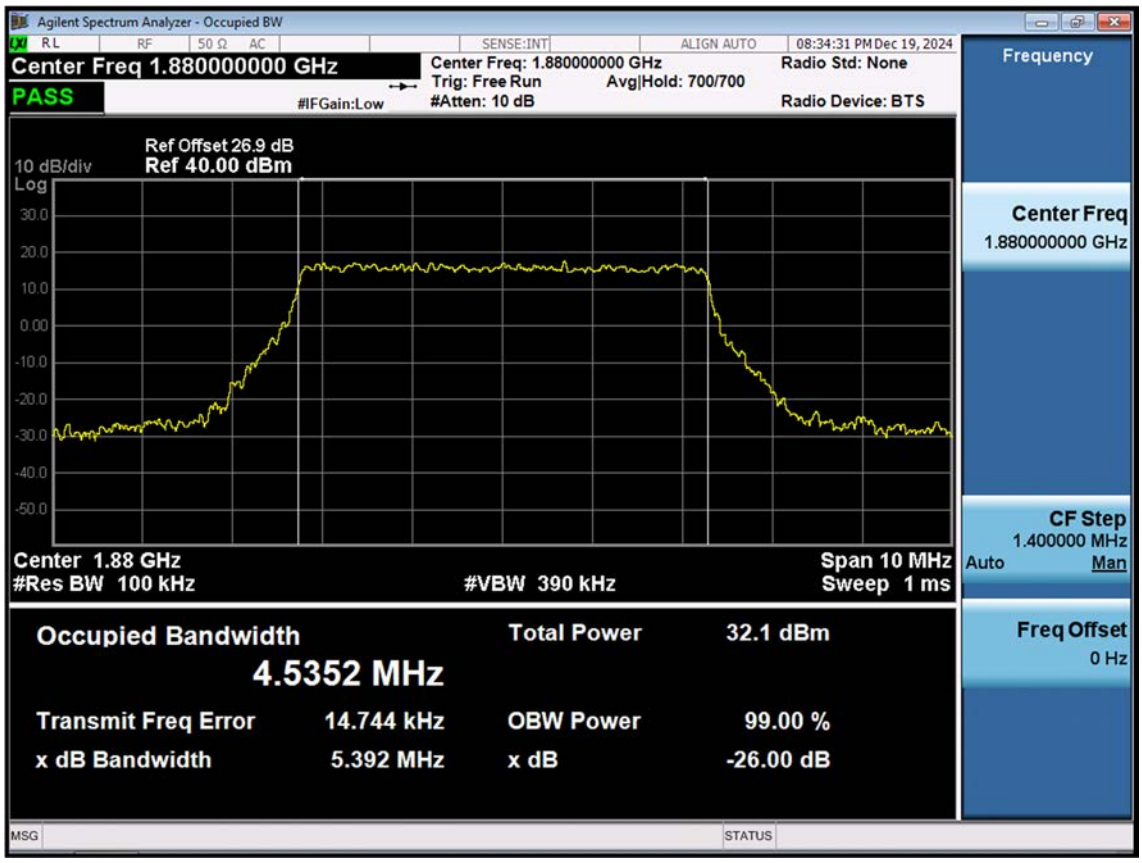

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_OBW_Mid_16QAM_FullRB

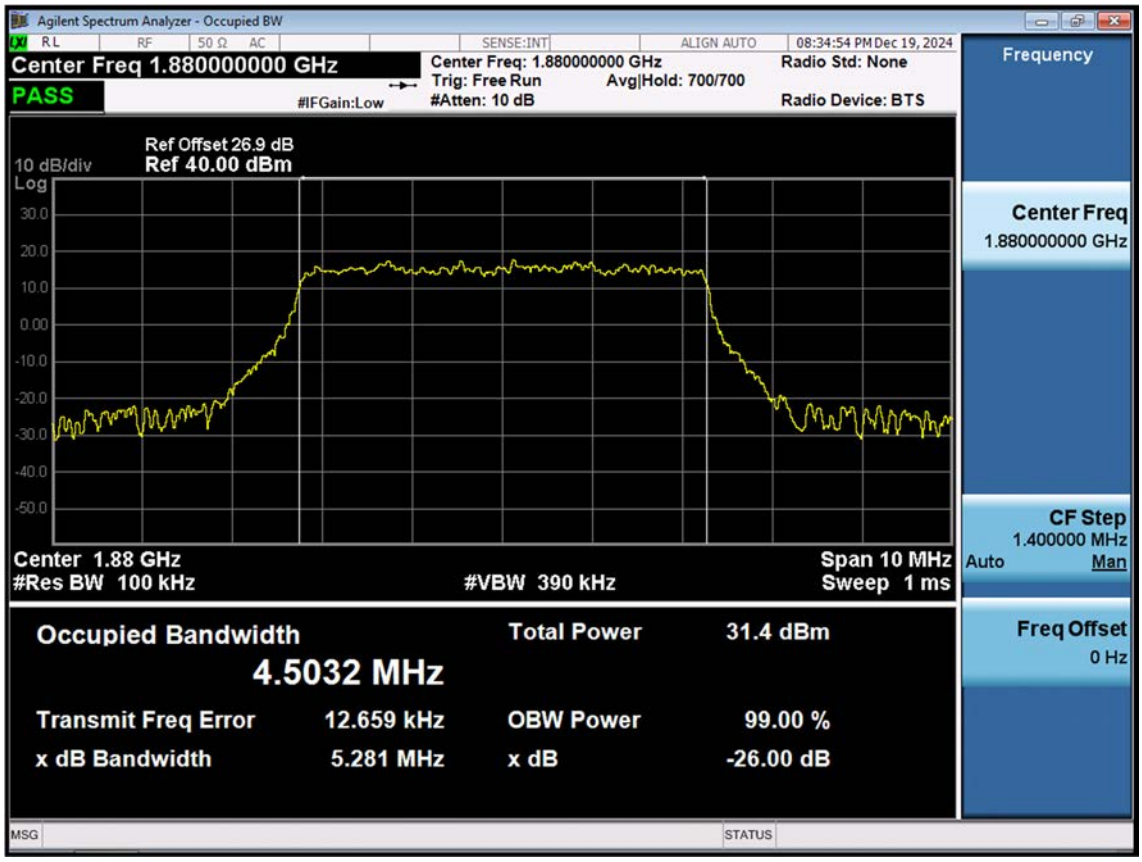

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_OBW_Mid_64QAM_FullRB

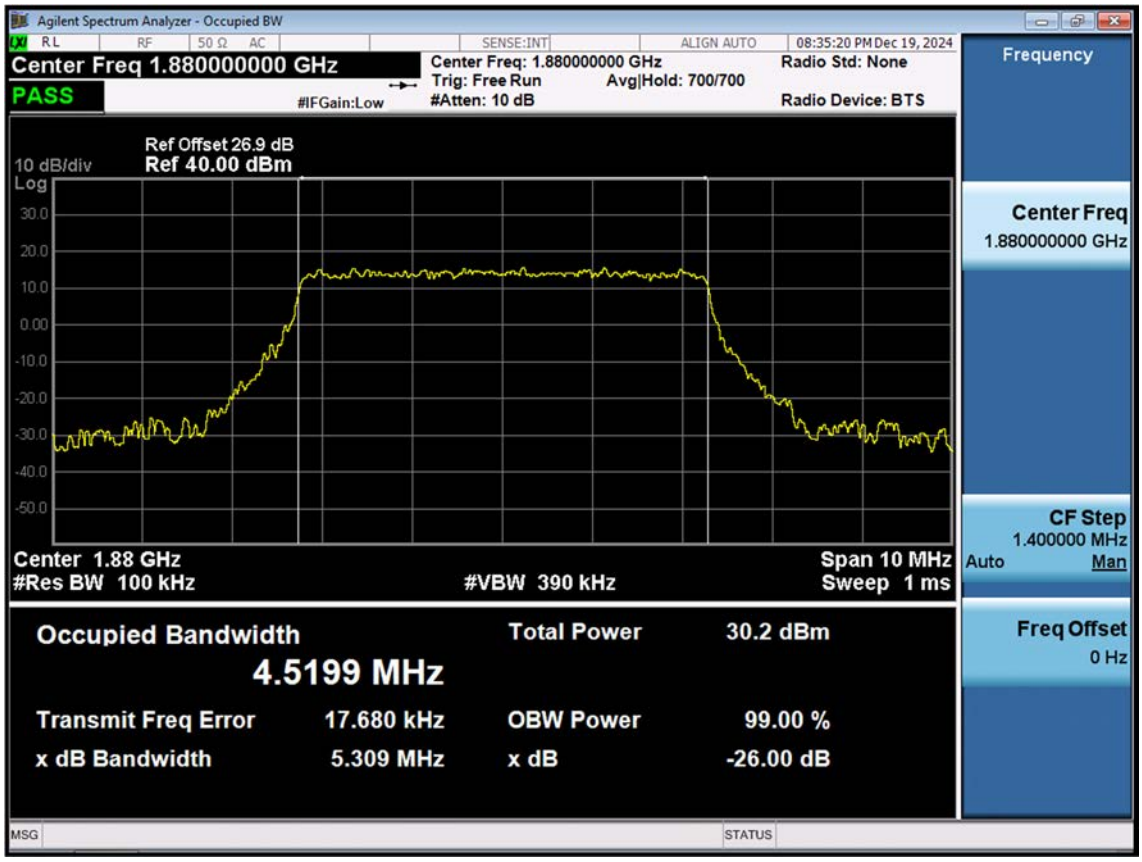

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_5 M_OBW_Mid_256QAM_FullRB

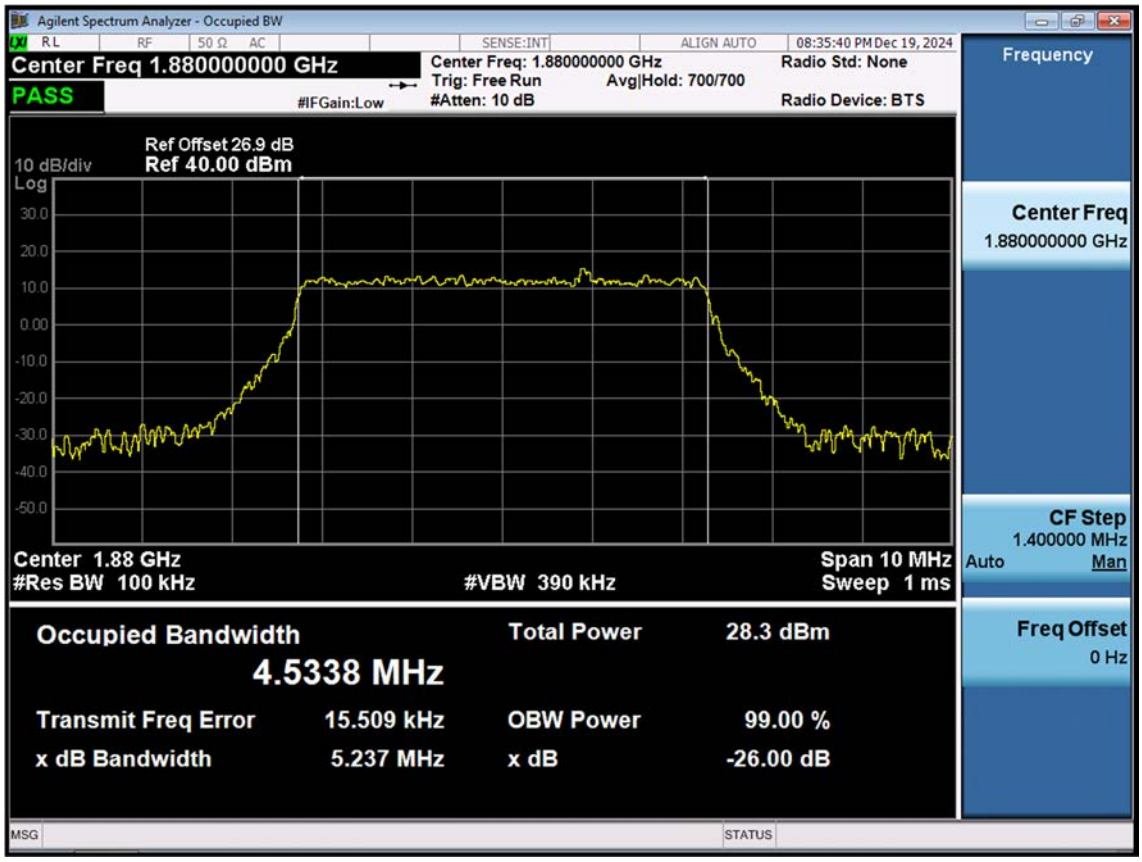

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_OBW_Mid_QPSK_FullRB

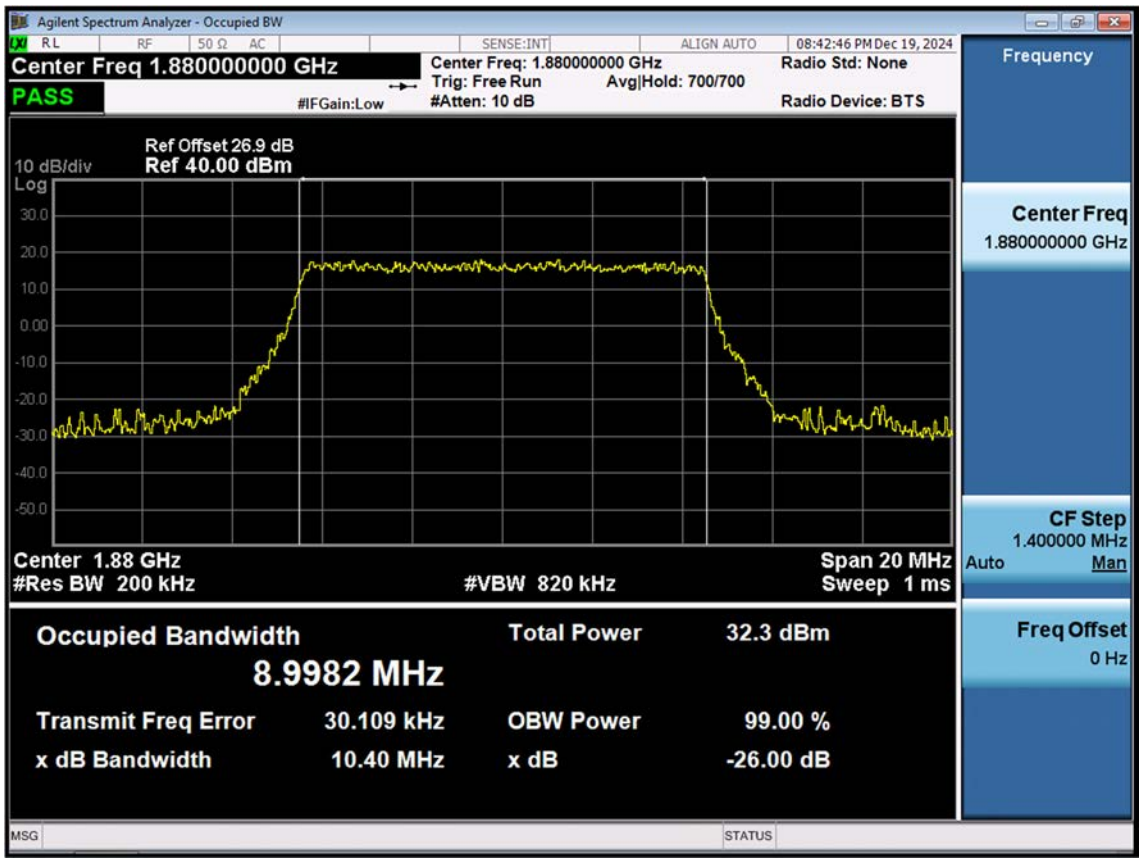

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_OBW_Mid_16QAM_FullRB

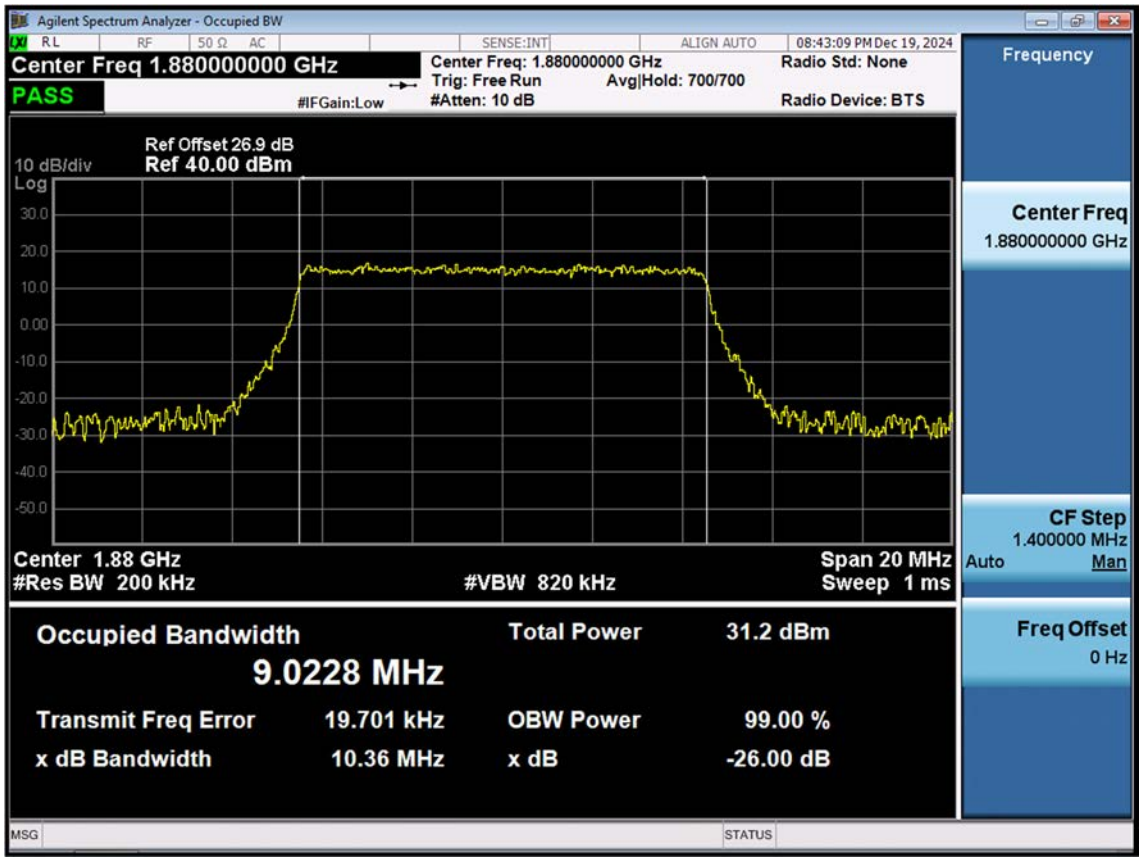

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_OBW_Mid_64QAM_FullRB

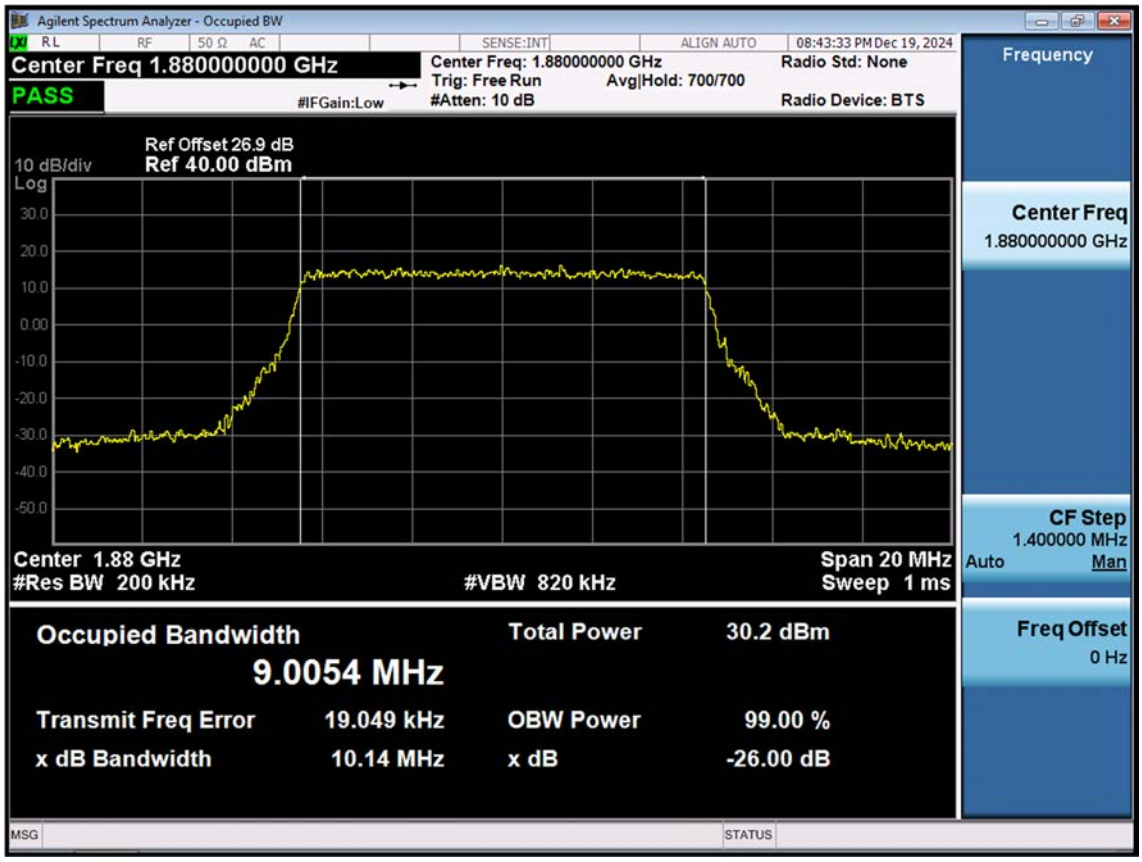

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_10 M_OBW_Mid_256QAM_FullRB

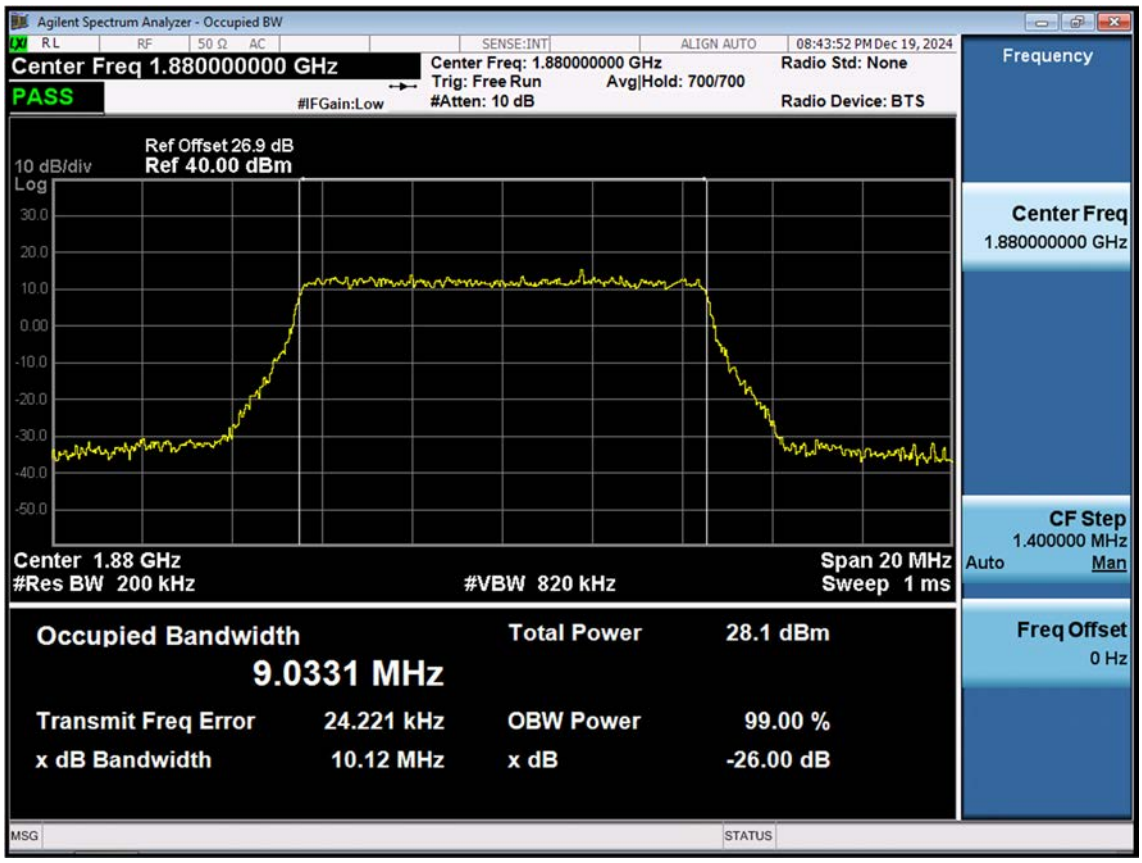

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_OBW_Mid_QPSK_FullRB

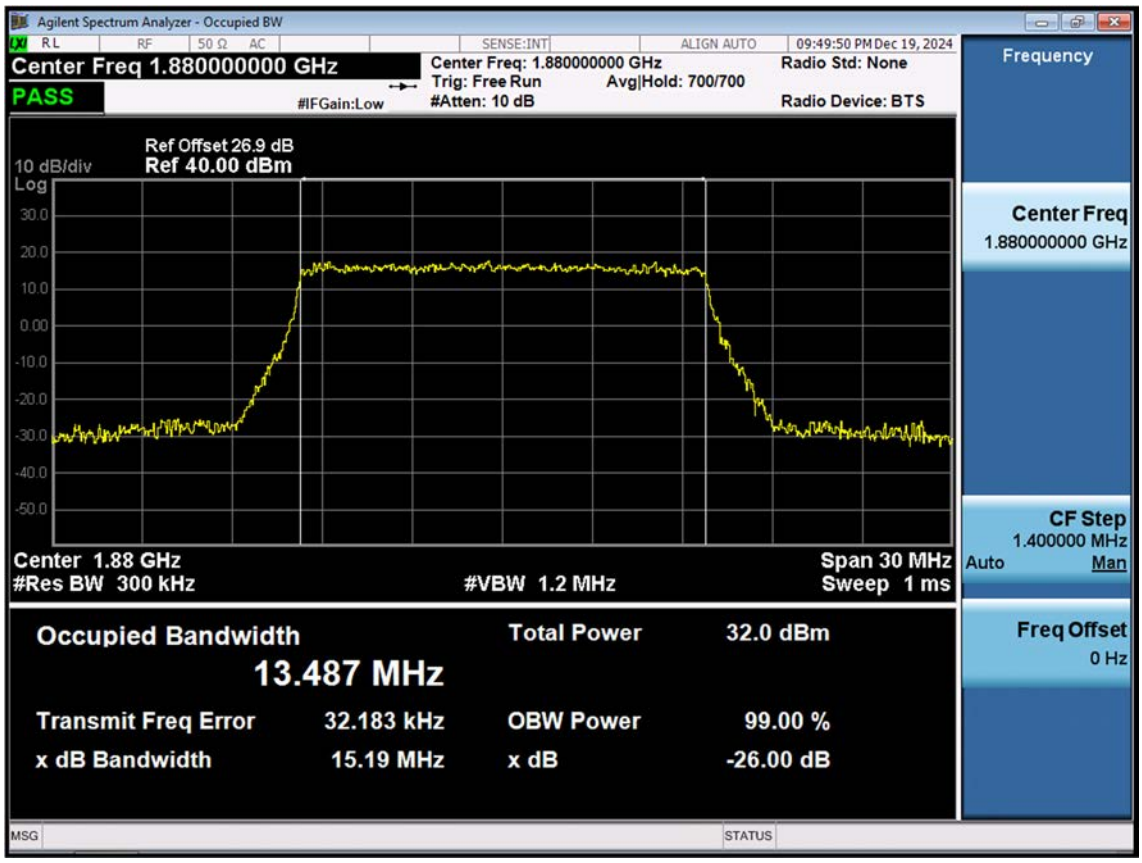

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_OBW_Mid_16QAM_FullRB

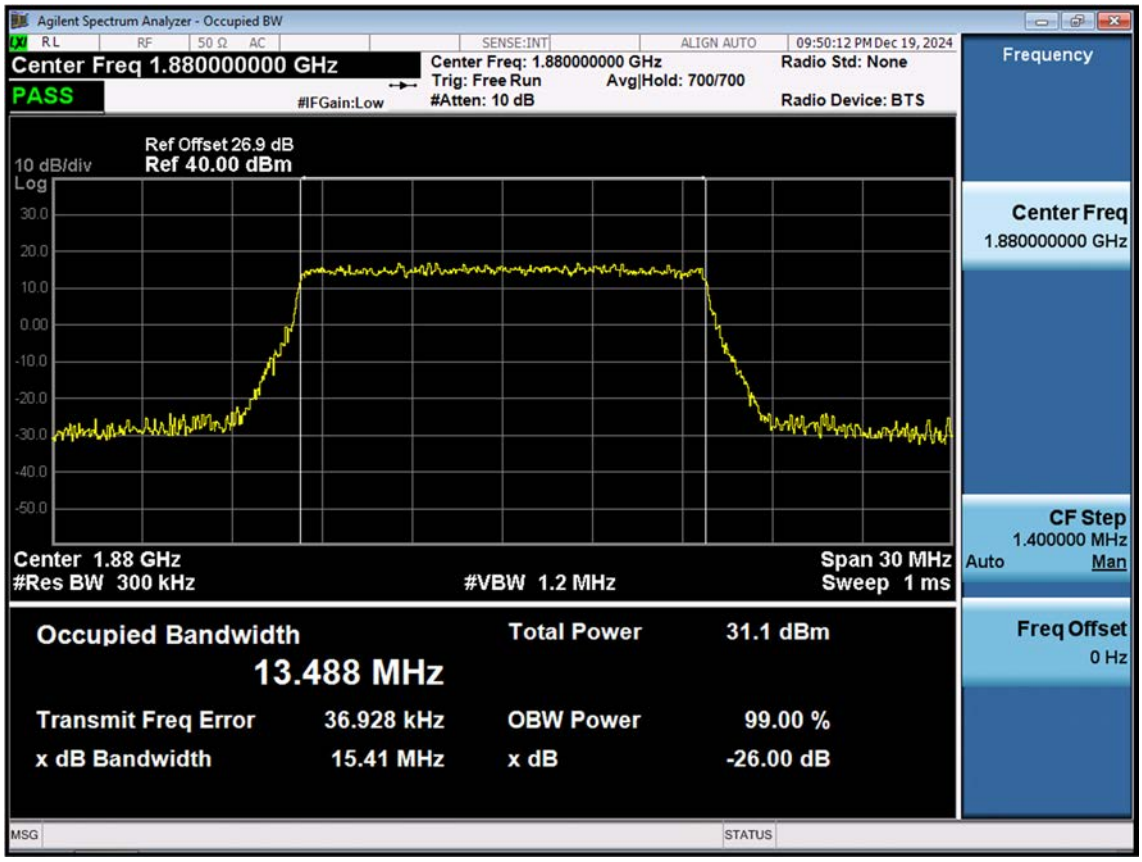

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_OBW_Mid_64QAM_FullRB

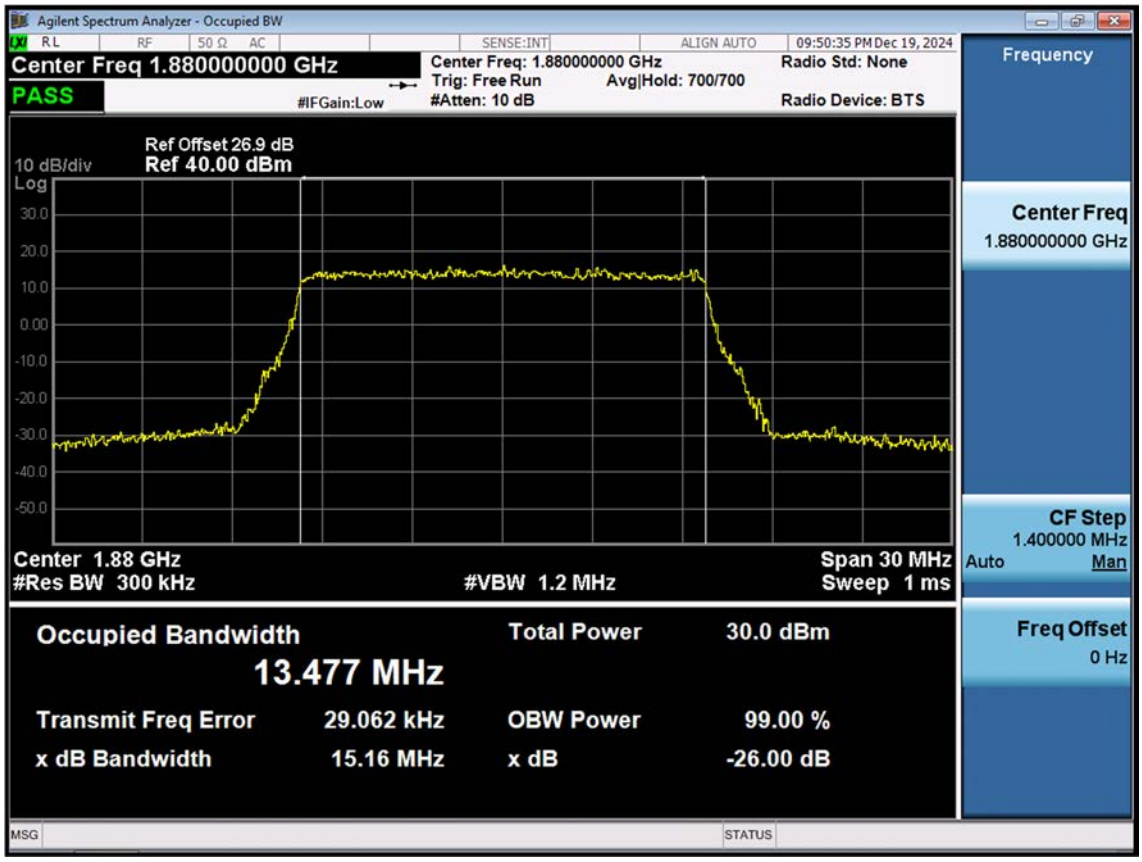

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_15 M_OBW_Mid_256QAM_FullRB

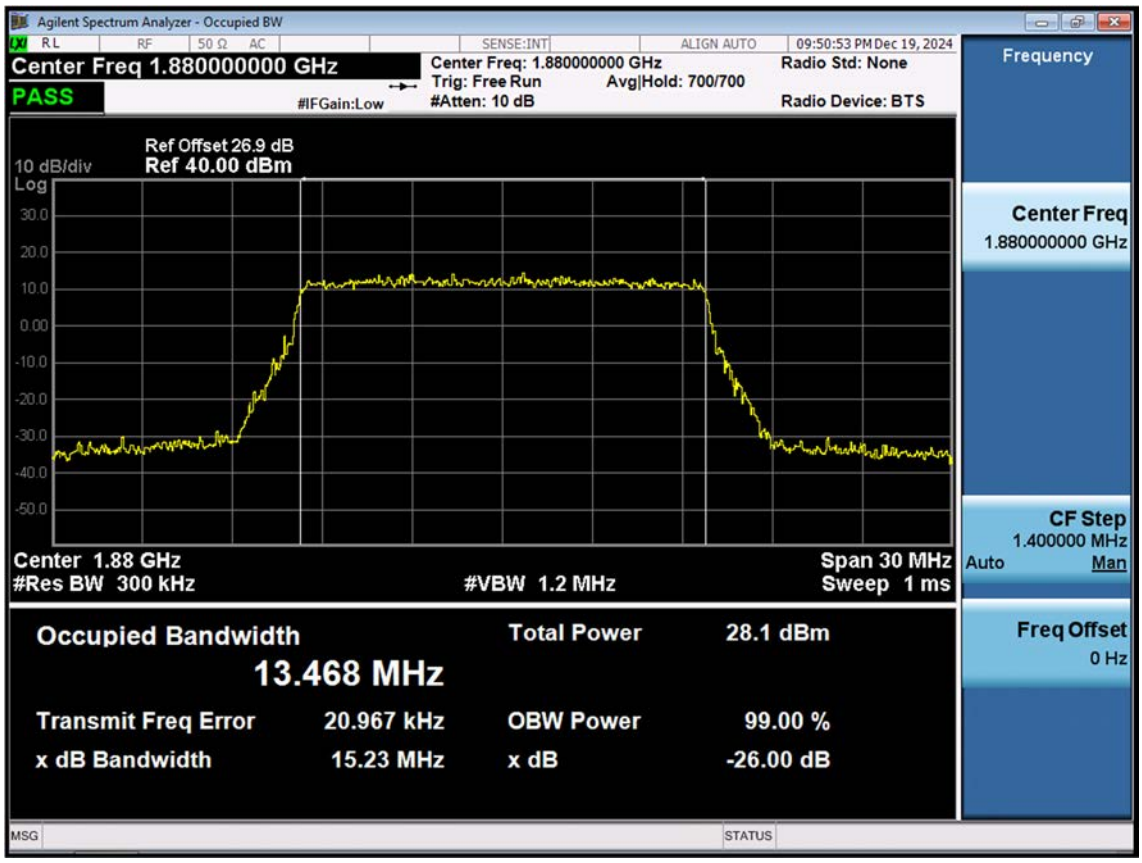

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_OBW_Mid_QPSK_FullRB

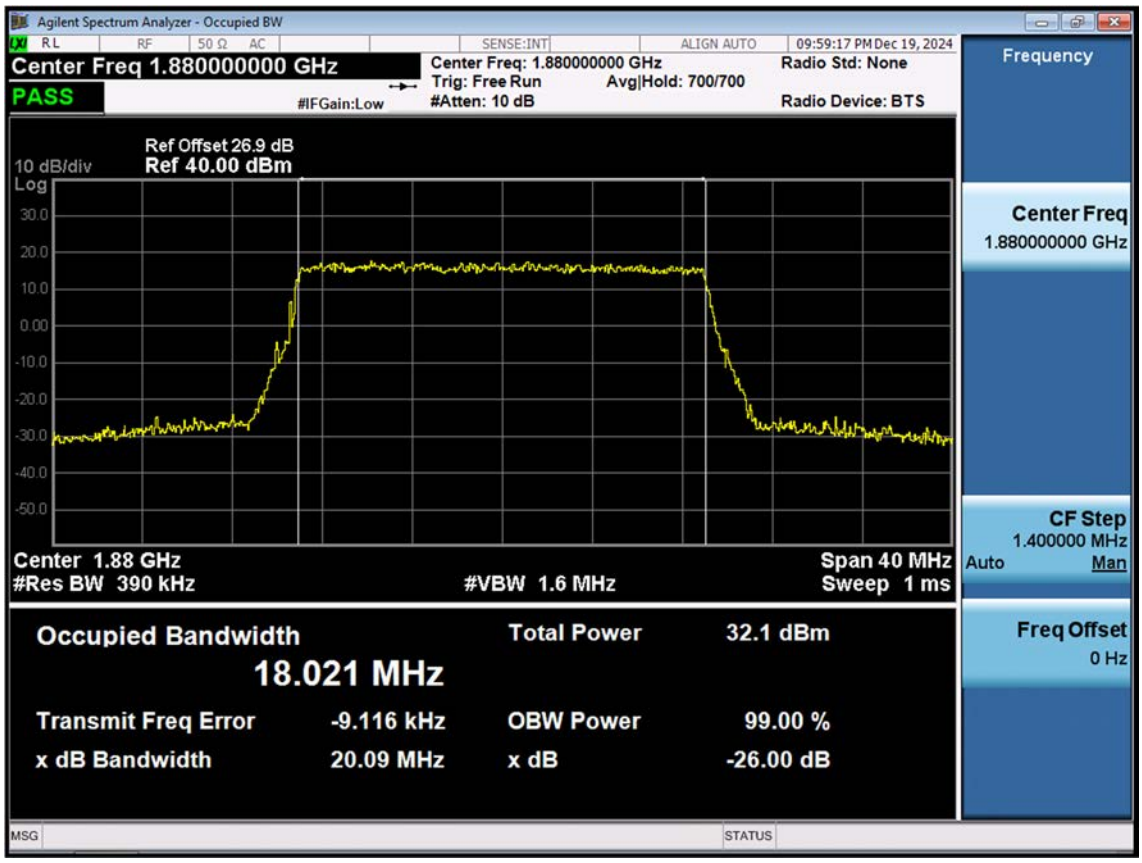

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_OBW_Mid_16QAM_FullRB

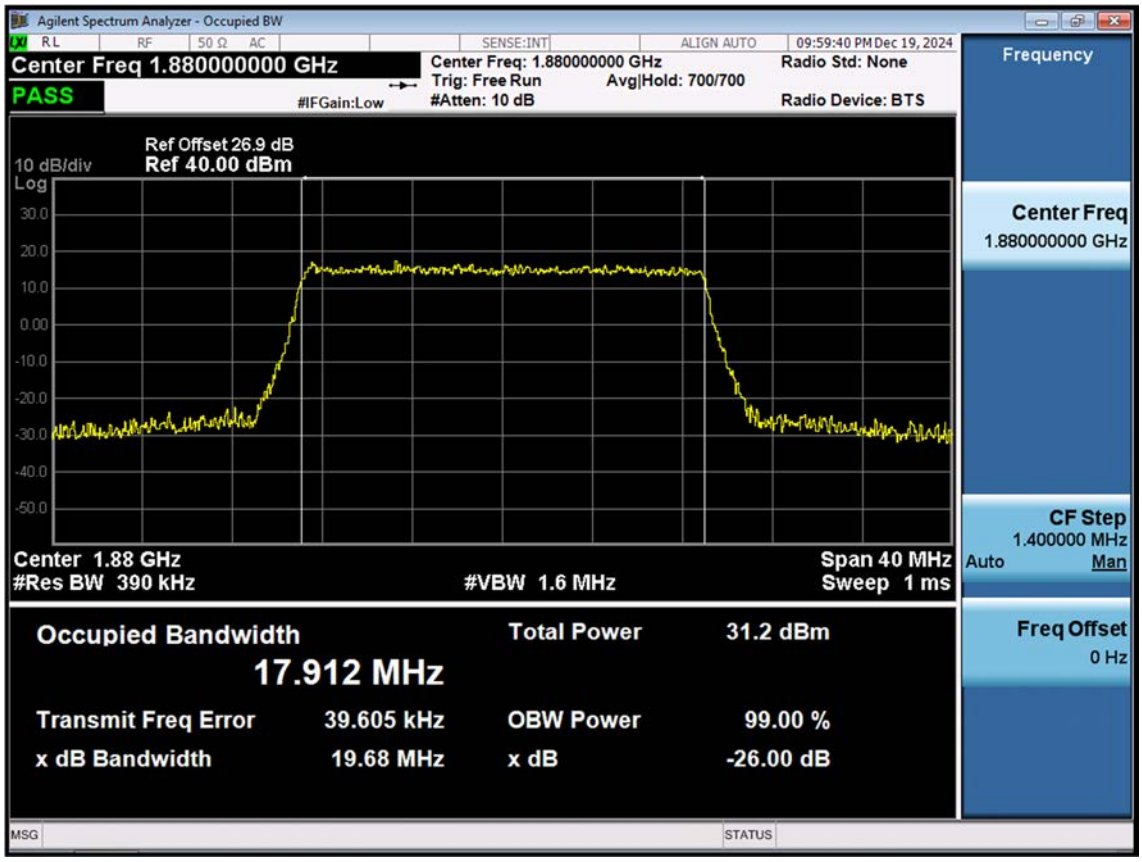

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_OBW_Mid_64QAM_FullRB

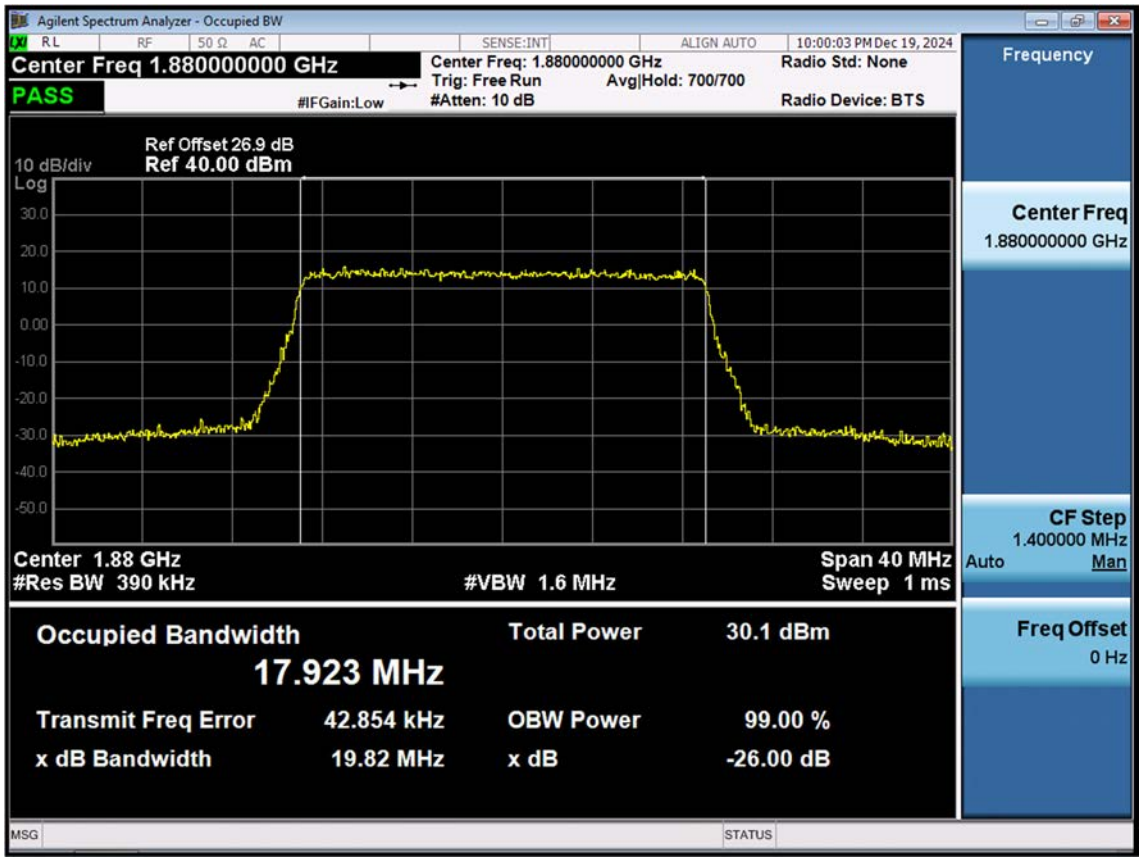

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_20 M_OBW_Mid_256QAM_FullRB

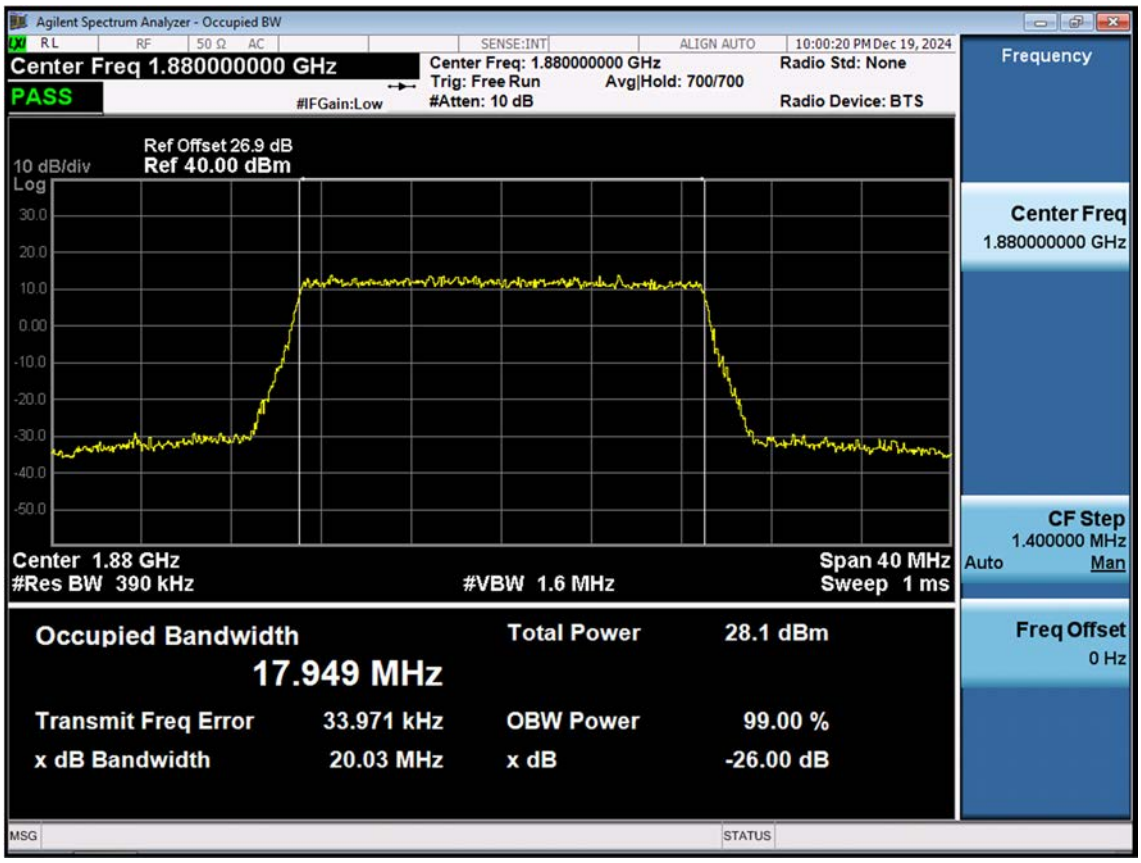

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

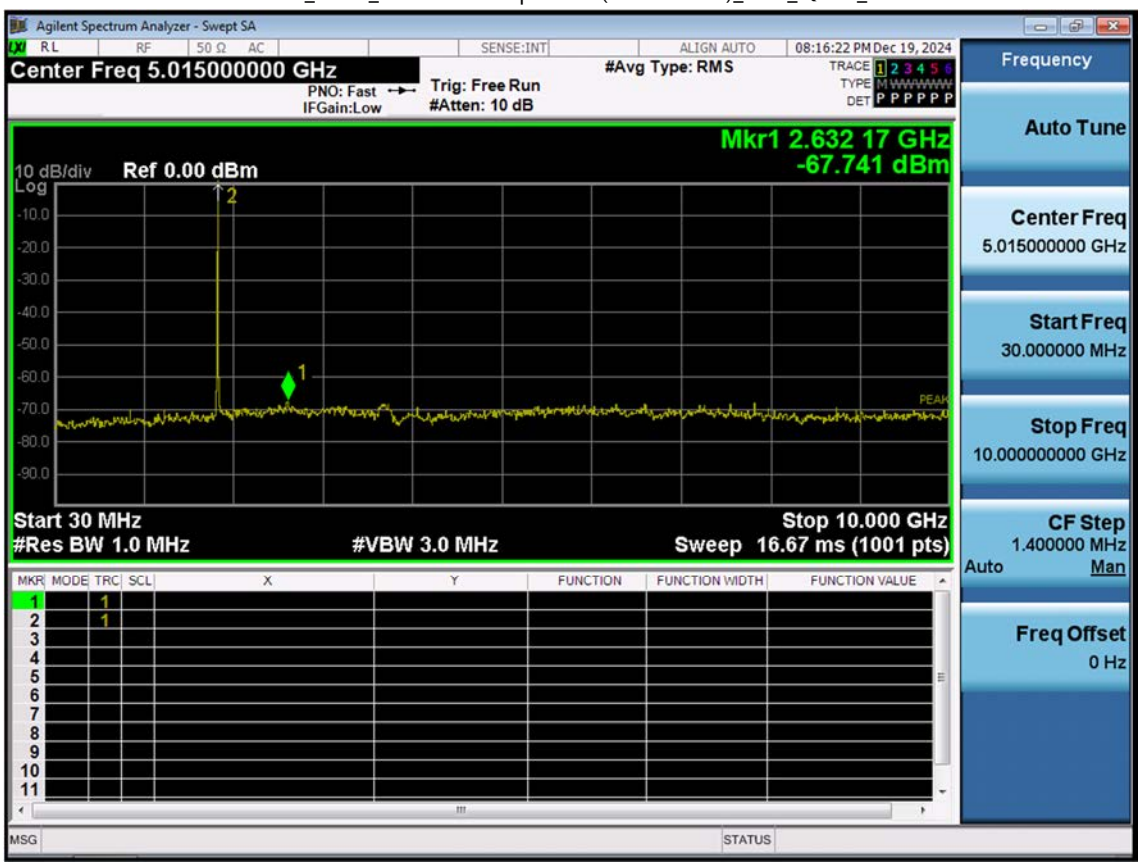

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

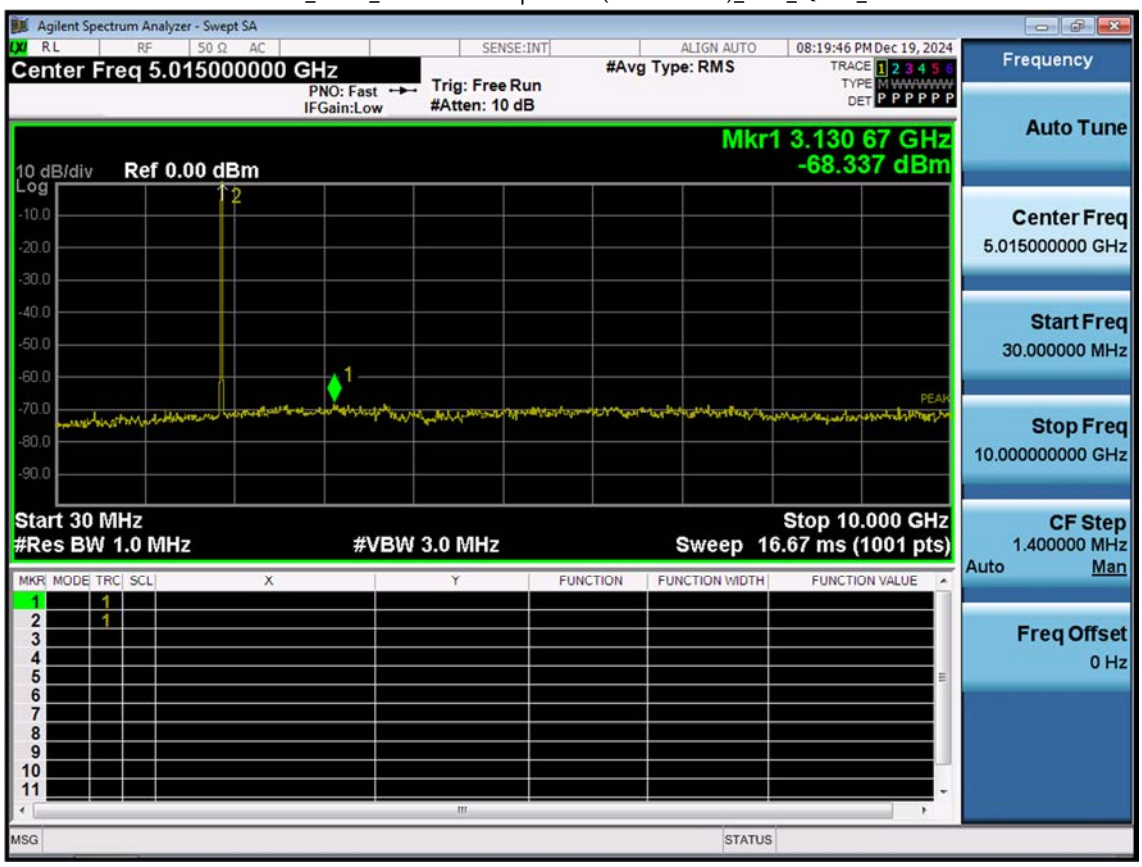

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_1.4M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

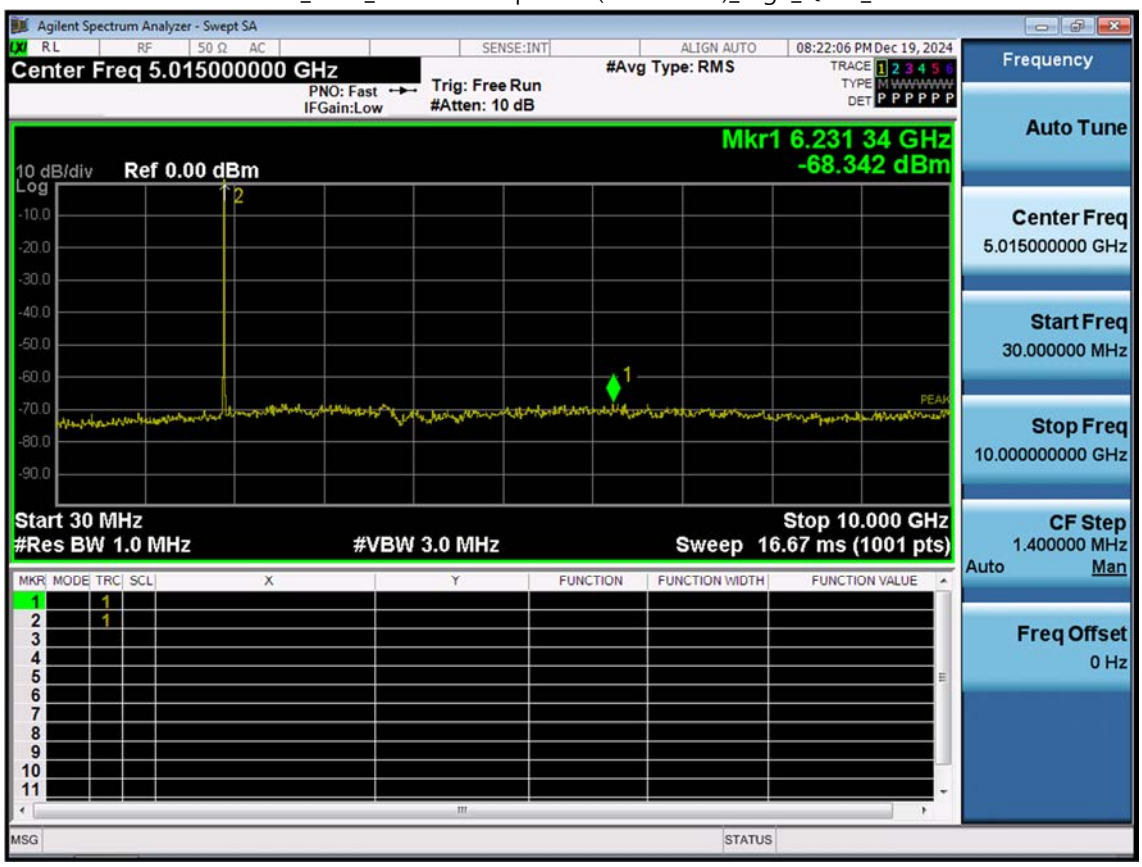

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

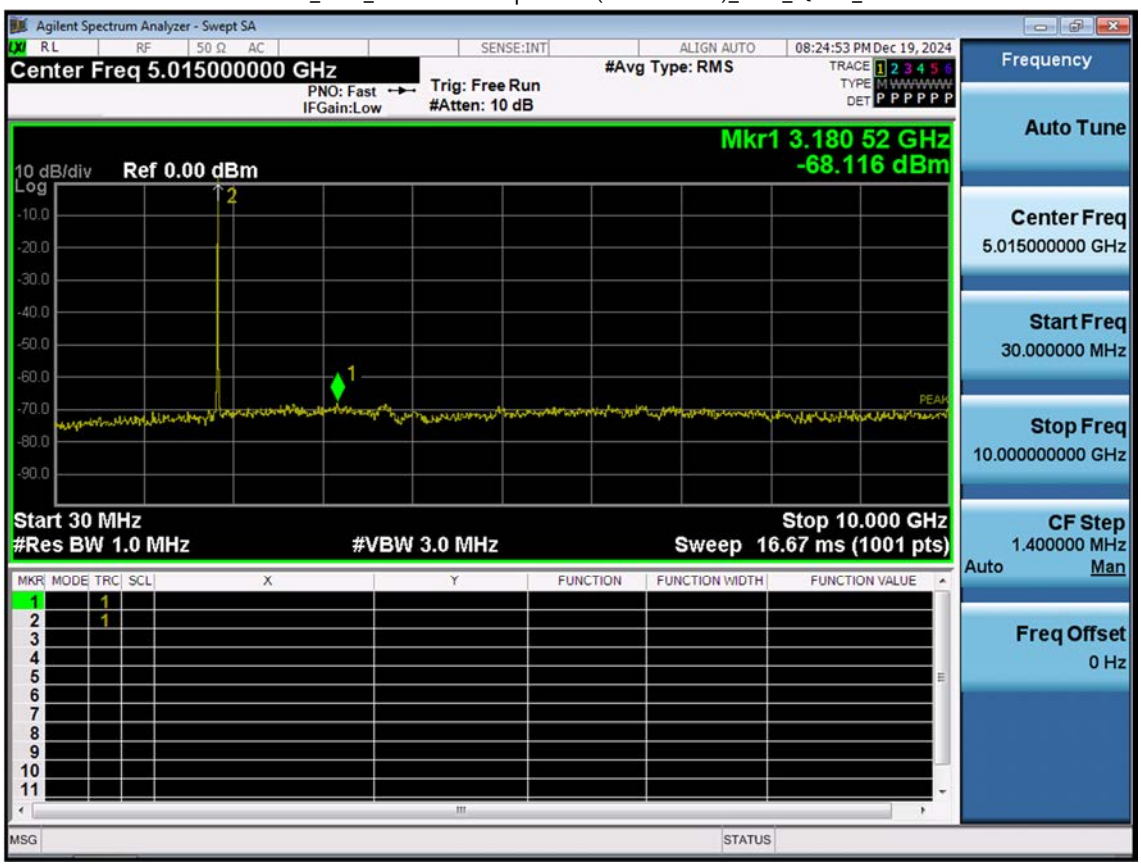

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

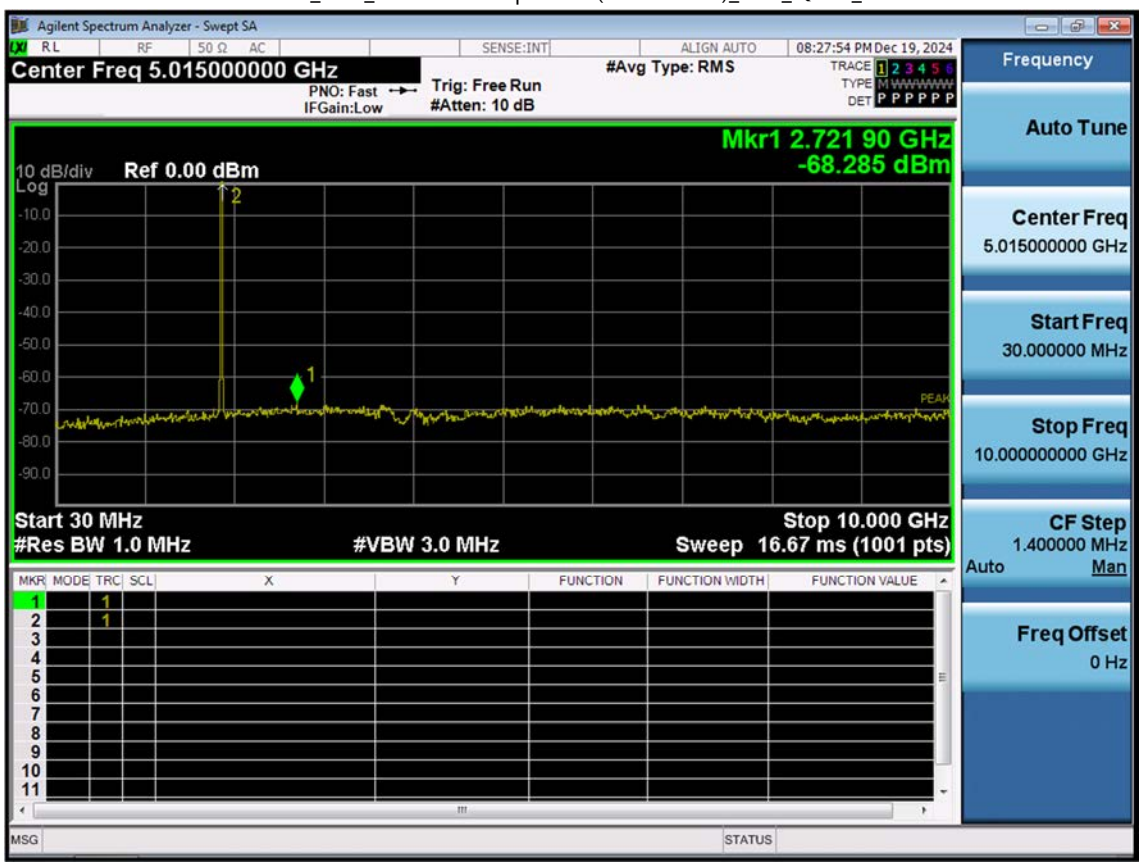

The report shall not be (partly) reproduced except in full without approval of the laboratory.

LTE B2_3 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

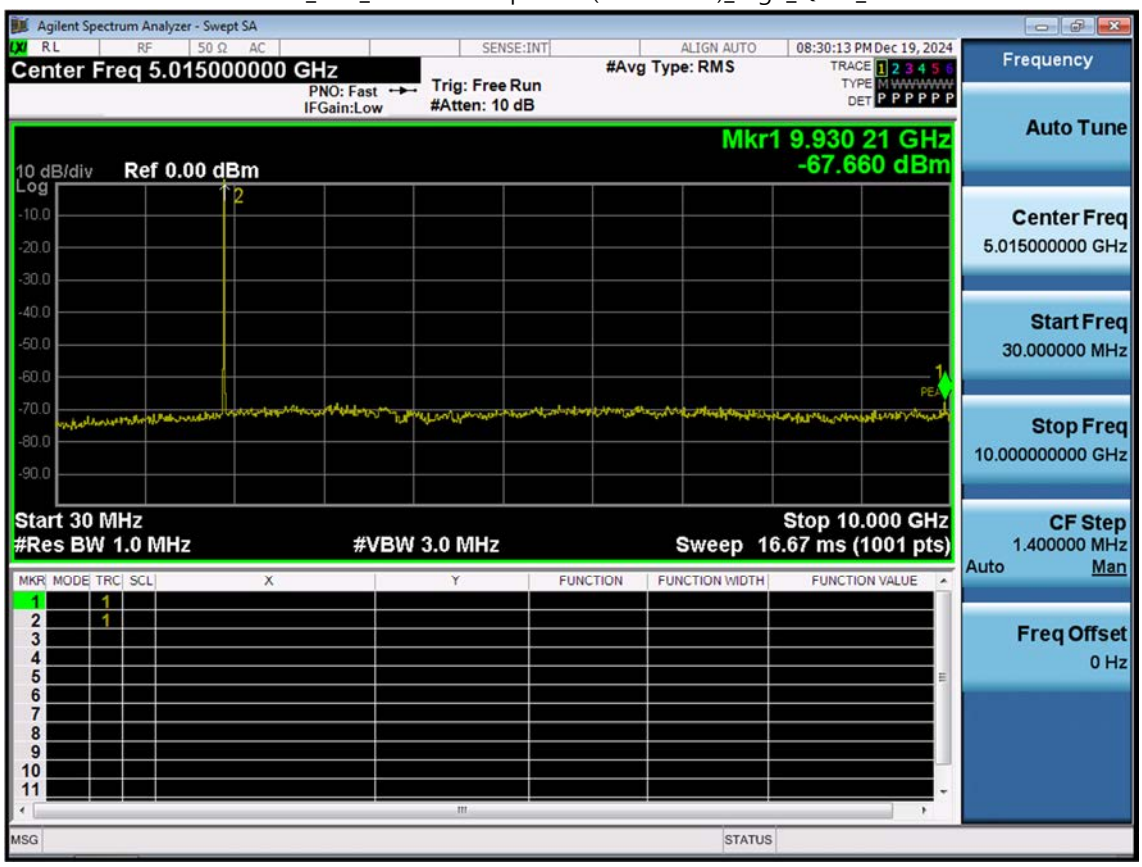

The report shall not be (partly) reproduced except in full without approval of the laboratory.