

TEST REPORT

FCC 2G3G Test for SM-A276B/DS
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2604-FC039

DATE OF ISSUE
April 27, 2026

Tested by
Jae Ryang Do



Technical Manager
Kwon Jeong



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2604-FC039

DATE OF ISSUE

April 27, 2026

Additional Model

SM-A276B

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-A276B/DS

Date of Test

March 18, 2026 ~ April 24, 2026

FCC ID

A3LSMA276B

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 22, § 24, § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 27, 2026	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1 MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
2.4. EQUIPMENT.....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS.....	10
3.4 PEAK- TO- AVERAGE RATIO	11
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(CONDUCTED TEST).....	18
3.10 WORST CASE(RADIATED TEST)	19
4. LIST OF TEST EQUIPMENT.....	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION.....	23
8. TEST DATA	25
8.1 EFFECTIVE RADIATED POWER.....	25
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.3 RADIATED SPURIOUS EMISSIONS.....	27
8.4 PEAK-TO-AVERAGE RATIO	32
8.5 OCCUPIED BANDWIDTH.....	33
8.6 CONDUCTED SPURIOUS EMISSIONS	34
8.7 BAND EDGE	34
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	35
9. TEST PLOTS.....	46
9.1 OCCUPIED BANDWIDTH.....	47
9.2 PEAK-TO-AVERAGE RATIO	64
9.3 BAND EDGE	75
9.4 CONDUCTED SPURIOUS EMISSIONS	111
10. ANNEX A_ TEST SETUP PHOTO	135

MEASUREMENT REPORT

1. GENERAL INFORMATION

Model(s):	SM-A276B/DS
Additional Model(s)	SM-A276B
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700)
Serial number:	Radiated : R37L300SH8L, R3GL30N613N(GSM850 R.S.E. Only) Conducted : R37L300SGRV
Antenna Information	Please refer to the Antenna Specification document.

1.1 MAXIMUM OUTPUT POWER

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	243KGXW	0.587	27.69
GSM850 EDGE			248KG7W	0.121	20.84
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.091	19.57

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	247KGXW	0.746	28.73
GSM1900 EDGE			244KG7W	0.230	23.62
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M17F9W	0.164	22.15
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M16F9W	0.128	21.08

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, 5G NR(Sub 6).
It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth(iPA), BT LE(iPA), NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea.
Detailed description of test facility was submitted to the Commission and accepted dated February 26, 2026 (Registration Number: KR0032).

2.4. EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to ANSI/USEMCSC C63.2-2023, "American National Standard for Specifications of Electromagnetic Interference and Field Strength Measuring Instrumentation in the Frequency Range 9 kHz to 40 GHz".

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d (\text{dBm}) = P_g (\text{dBm}) - \text{cable loss} (\text{dB}) + \text{antenna gain} (\text{dB})$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. No. of sweep points $> 2 \times$ span / RBW
4. Detector = Peak
5. Trace mode = Max Hold
6. The trace was allowed to stabilize
7. Test channel : Low/ Middle/ High
8. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: : P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

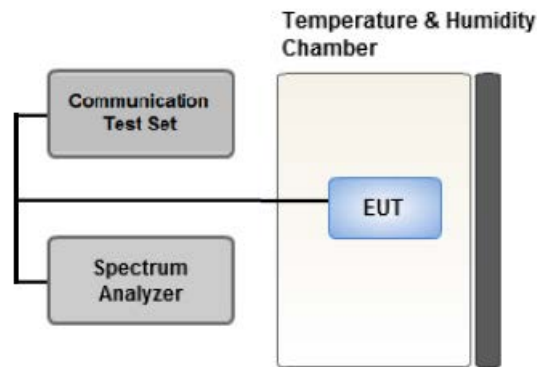

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

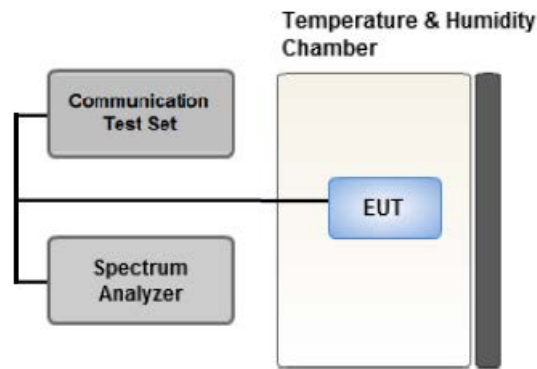

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

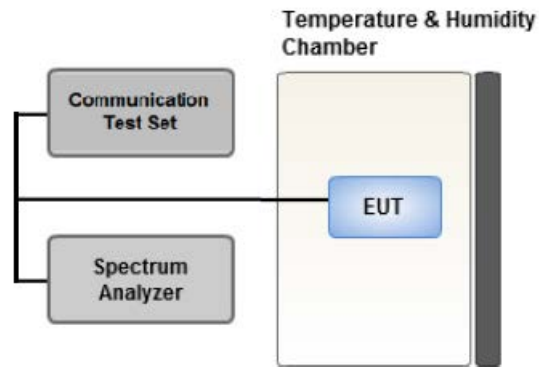

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep = 1001

3.7 BAND EDGE

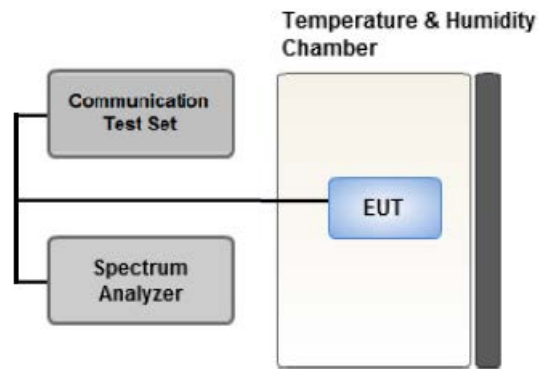

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time > (Number of Points) x (Symbol Period)
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

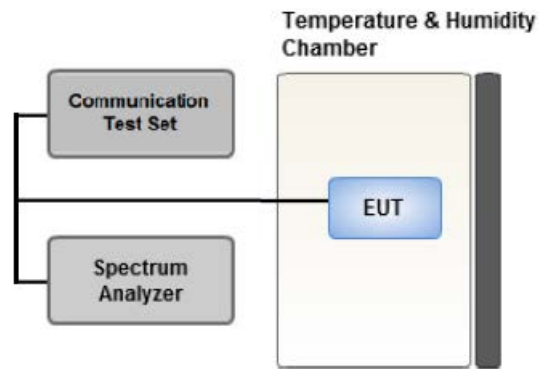

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - SM-A276B/DS & additional models were tested and the worst case results are reported.
- (Worst case : SM-A276B/DS)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, High
Peak-To-Average Ratio	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Mid
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC)	Low, Mid, High

[Test Channel]

	Uplink Channel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-A276B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-A276B/DS)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : X WCDMA B5 : Z	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Y WCDMA B4 : X WCDMA B5 : X	Low, Mid, High

[Worst case_2G]

Test Description	Modulation	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : X GSM1900 : X	Low, Mid, High
	EDGE (1 TX Slot)	GSM850 : X GSM1900 : X	GSM 850 : High GSM1900 : Low
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : Z GSM1900 : Y	Low, Mid, High

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	input 1 + 1.2G HPF+LNA	HCT CO., LTD.	F1L1	12/17/2026	Annual
RF Switching System	input 1 + 3.3 G HPF+LNA	HCT CO., LTD.	F1L2	12/17/2026	Annual
RF Switching System	input 1 + LNA	HCT CO., LTD.	F1L4	12/17/2026	Annual
RF Switching System	Input 2 + 6G HPF + LNA	HCT CO., LTD.	F1L7	12/17/2026	Annual
Broadband LNA	CBL18265035	CERNEX	22966	10/21/2026	Annual
Broadband LNA	CBL26405040	CERNEX	25956	02/09/2027	Annual
Power Splitter	11667B	Hewlett Packard	5001	04/01/2027	Annual
DC Power Supply	E3632A	Agilent	MY40010147	07/29/2026	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/05/2028	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/04/2027	Annual
Horn Antenna	BBHA 9120D	Schwarzbeck	147	08/07/2027	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1298	08/27/2027	Biennial
Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
MXA SIGNAL ANALYZER	N9020A	Agilent	MY52090906	04/08/2027	Annual
20dB ATTENUATOR	8493C	HP	15233	12/10/2026	Annual
Spectrum Analyzer	FSV40	ROHDE & SCHWARZ	100931	07/28/2026	Annual
Wireless Communications Set	E5515C	Agilent	MY48360800	07/29/2026	Annual
Loop Antenna	FMZB1513	Schwarzbeck	1513-333	06/23/2027	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	00895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	SCHWARZBECK MESS- ELEKTRONIK	01135	08/19/2026	Biennial
Radio Communication Analyzer	MT8821C	Anritsu	6262094331	11/24/2026	Annual
Radio Communication Test Station	MT8000A	Anritsu	6272613402	08/18/2026	Annual
SIGNAL GENERATOR	SMB100A	ROHDE & SCHWARZ	177633	07/22/2026	Annual
Signal Analyzer	N9030B	KEYSIGHT	MY55480167	05/14/2026	Annual
SIGNAL ANALYZER	FSW67	ROHDE & SCHWARZ	101736	05/27/2026	Annual
Automation Software	FCC 2G/3G/4G Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC NR Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC LTE Radiated	HCT CO., LTD	-	-	-
Automation Software	FCC NR Radiated	HCT CO., LTD	-	-	-

Note:

1. Equipment whose calibration due date was updated during the test period was not used between the previous due date and the update. All reported measurements were performed using equipment within valid calibration.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of ANSI C63.5-2017.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ kHz)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.11 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.73 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.54 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.86 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.44 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

- The decision rule applies 'simple acceptance'

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS. <u>Note1</u>
Peak- to- Average Ratio	§ 22.913(d), § 24.232(d), § 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.11055, § 22.355	< 2.5 ppm	PASS
	§ 24.235, § 27.54	Emission must remain in band	PASS

Note:

1. Refer to the SAR report.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§ 24.232(c), § 27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-23.51	38.89	-9.95	1.44	H	< 7.00	0.562	27.50
	190	836.6	-23.72	38.61	-9.95	1.45	H		0.526	27.21
	251	848.8	-23.18	38.99	-9.85	1.45	H		0.587	27.69
EDGE	251	848.8	-23.32	38.85	-9.85	1.45	H		0.121	20.84

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-31.44	30.82	-9.95	1.44	H	< 7.00	0.088	19.43
	4183	836.6	-31.36	30.97	-9.95	1.45	H		0.091	19.57
	4233	846.6	-31.32	30.79	-9.85	1.45	H		0.089	19.49

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-13.47	20.40	10.40	2.07	H	< 2.00	0.746	28.73
	661	1880.0	-14.12	20.00	10.40	2.21	H		0.659	28.19
	810	1909.8	-14.60	19.66	10.40	2.17	H		0.615	27.89
EDGE	512	1850.2	-18.58	15.29	10.40	2.07	H		0.230	23.62

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-20.05	13.82	10.40	2.07	H	< 2.00	0.164	22.15
	9400	1880.0	-21.09	13.03	10.40	2.21	H		0.132	21.22
	9538	1907.6	-20.98	13.28	10.40	2.17	H		0.142	21.51

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-21.20	12.34	10.04	2.06	H	< 1.00	0.108	20.32
	1412	1732.4	-20.99	12.49	10.12	2.08	H		0.113	20.53
	1513	1752.6	-20.60	12.95	10.21	2.08	H		0.128	21.08

8.3 RADIATED SPURIOUS EMISSIONS

MODULATION SIGNAL: GSM850
 DISTANCE: 3 meters

Ch.	Freq. (MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-41.02	9.58	-65.78	2.02	V	-58.22	-13.00
		-40.31		-65.07		H	-57.51	-13.00
	2 472.60	-31.62	10.30	-52.27	2.57	V	-44.54	-13.00
		-29.31		-49.96		H	-42.23	-13.00
	3 296.80	-41.36	12.13	-60.39	2.95	V	-51.21	-13.00
		-39.66		-58.69		H	-49.51	-13.00
190 (836.6)	1 673.20	-40.13	9.72	-65.06	2.05	V	-57.39	-13.00
		-40.44		-65.37		H	-57.70	-13.00
	2 509.80	-31.08	10.59	-51.54	2.51	V	-43.46	-13.00
		-29.65		-50.11		H	-42.03	-13.00
	3 346.40	-39.47	12.37	-58.99	2.96	V	-49.58	-13.00
		-38.10		-57.62		H	-48.21	-13.00
251 (848.8)	1 697.60	-40.55	9.88	-65.29	2.07	V	-57.48	-13.00
		-42.03		-66.77		H	-58.96	-13.00
	2 546.40	-31.45	10.66	-51.94	2.53	V	-43.81	-13.00
		-28.77		-49.26		H	-41.13	-13.00
	3 395.20	-40.71	12.50	-60.36	2.98	V	-50.84	-13.00
		-38.26		-57.91		H	-48.39	-13.00

MODULATION SIGNAL: GSM1900

DISTANCE: 3 meters

Ch.	Freq. (MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3 700.40	-41.05	12.29	-58.25	3.07	V	-49.03	-13.00
		-39.39		-56.59		H	-47.37	-13.00
	5 550.60	-36.89	13.03	-49.41	3.89	V	-40.27	-13.00
		-34.55		-47.07		H	-37.93	-13.00
	7 400.80	-44.76	10.80	-48.16	4.58	V	-41.94	-13.00
		-42.54		-45.94		H	-39.72	-13.00
	9 251.00	-37.50	10.56	-35.26	5.17	V	-29.87	-13.00
		-38.77		-36.53		H	-31.14	-13.00
	11 101.20	-44.93	11.08	-38.81	5.89	V	-33.62	-13.00
		-43.92		-37.80		H	-32.61	-13.00
661 (1880.0)	3 760.00	-40.20	12.22	-55.92	3.12	V	-46.82	-13.00
		-38.81		-54.53		H	-45.43	-13.00
	5 640.00	-32.52	13.12	-45.40	3.92	V	-36.20	-13.00
		-31.85		-44.73		H	-35.53	-13.00
	7 520.00	-42.05	10.82	-45.28	4.61	V	-39.07	-13.00
		-40.26		-43.49		H	-37.28	-13.00
	9 400.00	-39.11	10.40	-36.35	5.23	V	-31.18	-13.00
		-38.62		-35.86		H	-30.69	-13.00
	11 280.00	-43.71	11.29	-38.11	5.89	V	-32.71	-13.00
		-47.56		-41.96		H	-36.56	-13.00
810 (1909.8)	3 819.60	-42.68	12.16	-59.55	3.19	V	-50.58	-13.00
		-41.89		-58.76		H	-49.79	-13.00
	5 729.40	-34.71	13.04	-47.19	4.00	V	-38.15	-13.00
		-32.65		-45.13		H	-36.09	-13.00
	7 639.20	-44.37	11.21	-47.83	4.68	V	-41.30	-13.00
		-45.70		-49.16		H	-42.63	-13.00
	9 549.00	-39.77	10.87	-37.30	5.27	V	-31.70	-13.00
		-35.68		-33.21		H	-27.61	-13.00
	11 458.80	-47.80	10.86	-40.69	5.93	V	-35.76	-13.00
		-46.14		-39.03		H	-34.10	-13.00

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

Ch.	Freq. (MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit
4132 (826.4)	1 652.80	-42.01	9.61	-66.80	2.02	V	-59.21	-13.00
		-41.97		-66.76		H	-59.17	-13.00
	2 479.20	-37.33	10.34	-57.95	2.55	V	-50.16	-13.00
		-38.28		-58.90		H	-51.11	-13.00
	3 305.60	-43.02	12.18	-62.06	2.97	V	-52.85	-13.00
		-43.11		-62.15		H	-52.94	-13.00
4183 (836.6)	1 673.20	-38.27	9.72	-63.20	2.05	V	-55.53	-13.00
		-41.71		-66.64		H	-58.97	-13.00
	2 509.80	-38.82	10.59	-59.28	2.51	V	-51.20	-13.00
		-40.11		-60.57		H	-52.49	-13.00
	3 346.40	-43.53	12.37	-63.05	2.96	V	-53.64	-13.00
		-42.55		-62.07		H	-52.66	-13.00
4233 (846.6)	1 693.20	-31.83	9.85	-56.71	2.07	V	-48.93	-13.00
		-31.17		-56.05		H	-48.27	-13.00
	2 539.80	-39.11	10.67	-59.47	2.53	V	-51.33	-13.00
		-38.92		-59.28		H	-51.14	-13.00
	3 386.40	-43.31	12.52	-62.96	2.99	V	-53.43	-13.00
		-43.20		-62.85		H	-53.32	-13.00

MODULATION SIGNAL: WCDMA1900

DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-43.18	12.28	-60.42	3.08	V	-51.22	-13.00
		-43.90		-61.14		H	-51.94	-13.00
	5 557.20	-43.54	13.03	-55.98	3.88	V	-46.83	-13.00
		-43.12		-55.56		H	-46.41	-13.00
	7 409.60	-44.76	10.79	-48.11	4.57	V	-41.89	-13.00
		-44.10		-47.45		H	-41.23	-13.00
9400 (1880.0)	3 760.00	-42.69	12.22	-58.41	3.12	V	-49.31	-13.00
		-43.99		-59.71		H	-50.61	-13.00
	5 640.00	-40.08	13.12	-52.96	3.92	V	-43.76	-13.00
		-42.28		-55.16		H	-45.96	-13.00
	7 520.00	-43.98	10.82	-47.21	4.61	V	-41.00	-13.00
		-44.20		-47.43		H	-41.22	-13.00
9538 (1907.6)	3 815.20	-43.04	12.16	-59.68	3.20	V	-50.72	-13.00
		-43.30		-59.94		H	-50.98	-13.00
	5 722.80	-41.52	13.05	-54.14	4.00	V	-45.09	-13.00
		-39.19		-51.81		H	-42.76	-13.00
	7 630.40	-44.34	11.18	-47.78	4.66	V	-41.26	-13.00
		-43.83		-47.27		H	-40.75	-13.00

MODULATION SIGNAL: WCDMA1700

DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-42.75	12.43	-61.47	2.99	V	-52.03	-13.00
		-42.82		-61.54		H	-52.10	-13.00
	5 137.20	-41.40	12.33	-54.30	3.81	V	-45.78	-13.00
		-42.01		-54.91		H	-46.39	-13.00
	6 849.60	-43.69	11.90	-51.29	4.36	V	-43.75	-13.00
		-43.81		-51.41		H	-43.87	-13.00
1412 (1732.4)	3 464.80	-43.37	12.34	-61.62	3.02	V	-52.30	-13.00
		-43.24		-61.49		H	-52.17	-13.00
	5 197.20	-42.01	12.60	-55.14	3.79	V	-46.33	-13.00
		-43.89		-57.02		H	-48.21	-13.00
	6 929.60	-43.45	11.65	-50.36	4.40	V	-43.11	-13.00
		-44.37		-51.28		H	-44.03	-13.00
1513 (1752.6)	3 505.20	-43.15	12.34	-61.08	3.05	V	-51.79	-13.00
		-43.20		-61.13		H	-51.84	-13.00
	5 257.80	-42.76	12.99	-55.44	3.79	V	-46.24	-13.00
		-43.10		-55.78		H	-46.58	-13.00
	7 010.40	-45.09	11.26	-50.68	4.42	V	-43.84	-13.00
		-44.88		-50.47		H	-43.63	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P_{Pk} (dBm)	Measured P_{Avg} (dBm)	P_{Avg} (Duty Cycle)			$P.A.R.$ $= P_{Pk} - P_{Avg}$ (dB)	Limit (dB)	Pass / Fail
				T_{XTotal} (ms)	T_{XOn} (ms)	Factor (dB)			
GSM1900	661	31.004	21.13	4.6160	0.5475	9.26	0.62	13	Pass
GSM1900 EDGE	661	28.851	15.51	4.616	0.5475	9.26	4.08		
GSM850	190	CCDF Procedure					3.97		
GSM850 EDGE	190						6.28		
WCDMA850	4408						3.16		
WCDMA1900	9400						3.11		
WCDMA1700	1412						3.08		

Note:

1. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \times \log(1/X)$, $X = T_{XOn} / T_{XTotal}$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	243.24
	190	836.60	241.48
	251	848.80	242.54
GSM850 EDGE	128	824.20	248.00
	190	836.60	243.76
	251	848.80	241.14
GSM1900	512	1850.20	243.93
	661	1880.00	246.69
	810	1909.80	243.89
GSM1900 EDGE	512	1850.20	240.08
	661	1880.00	242.84
	810	1909.80	243.94
WCDMA850	4132	826.40	4.1558
	4183	836.60	4.1546
	4233	846.60	4.1474
WCDMA1900	9262	1852.40	4.1579
	9400	1880.00	4.1650
	9538	1907.60	4.1668
WCDMA1700	1312	1712.40	4.1582
	1412	1732.40	4.1536
	1513	1752.60	4.1539

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	Limit (dBm)
GSM850	128	6.2513	28.591	-56.962	-28.371	-13.00
	190	2.1337	27.976	-58.236	-30.260	
	251	3.0709	27.976	-57.388	-29.412	
GSM1900	512	19.04000	29.489	-53.453	-23.964	
	661	18.69000	29.489	-53.637	-24.148	
	810	18.58000	29.489	-52.848	-23.359	
WCDMA850	4132	6.2812	28.591	-67.836	-39.245	
	4183	3.2603	27.976	-67.718	-39.742	
	4233	2.5424	27.976	-66.589	-38.613	
WCDMA1900	9262	18.5600	29.489	-63.595	-34.106	
	9400	18.8700	29.489	-64.200	-34.711	
	9538	19.8300	29.489	-62.804	-33.315	
WCDMA1700	1312	18.89000	29.489	-62.450	-32.961	
	1412	18.93000	29.489	-63.911	-34.422	
	1513	17.01000	29.489	-63.915	-34.426	

Note:

1. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
2. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Section 9.3.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	836 600 013	0.0	0.000 000	0.0000
100 %		-30	836 600 029	15.2	0.000 002	0.0182
100 %		-20	836 600 027	13.6	0.000 002	0.0163
100 %		-10	836 600 029	15.4	0.000 002	0.0184
100 %		0	836 600 029	16.0	0.000 002	0.0191
100 %		+10	836 600 027	14.2	0.000 002	0.0169
100 %		+30	836 600 030	16.9	0.000 002	0.0203
100 %		+40	836 600 029	16.1	0.000 002	0.0192
100 %		+50	836 600 027	14.2	0.000 002	0.0170
Batt. Endpoint	3.300	+20	836 600 029	16.2	0.000 002	0.0194

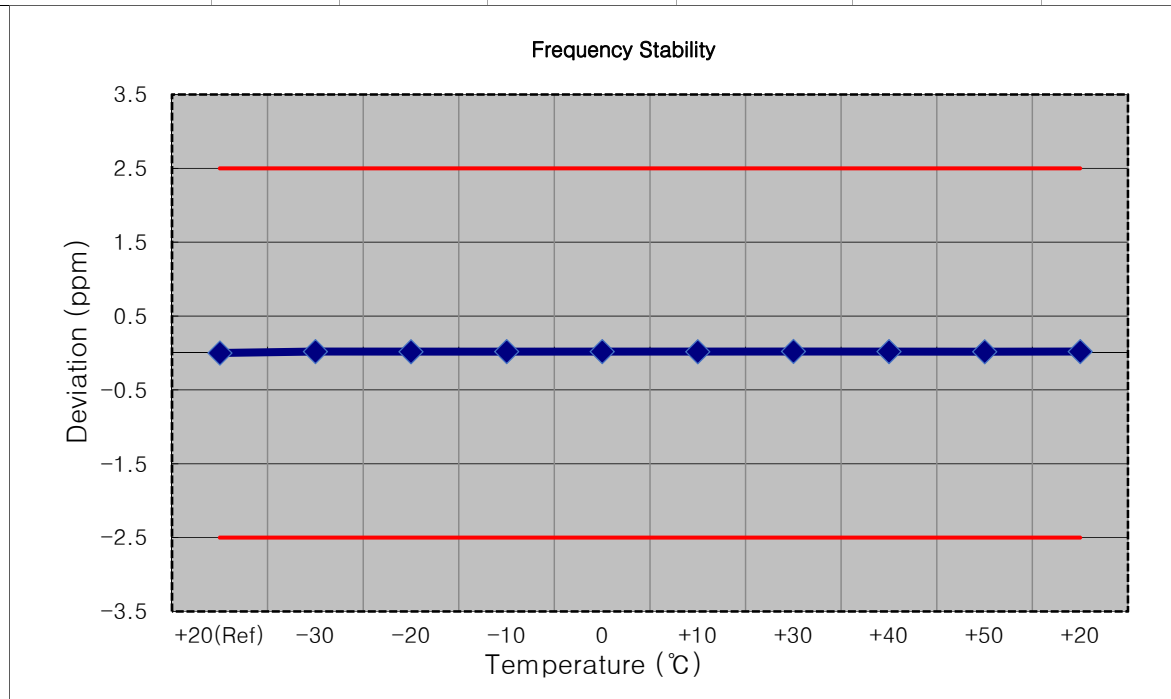


Mode:	<u>GSM1900</u>
OPERATING FREQUENCY:	<u>1850,200,000 Hz</u>
CHANNEL:	<u>512</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 200 017	0.0	0.000 000	0.0000
100 %		-30	1850 200 041	23.2	0.000 001	0.0126
100 %		-20	1850 200 037	20.1	0.000 001	0.0109
100 %		-10	1850 200 037	19.6	0.000 001	0.0106
100 %		0	1850 200 040	22.3	0.000 001	0.0121
100 %		+10	1850 200 034	17.1	0.000 001	0.0092
100 %		+30	1850 200 035	17.7	0.000 001	0.0096
100 %		+40	1850 200 036	18.4	0.000 001	0.0099
100 %		+50	1850 200 035	17.9	0.000 001	0.0097
Batt. Endpoint	3.300	+20	1850 200 034	16.5	0.000 001	0.0089

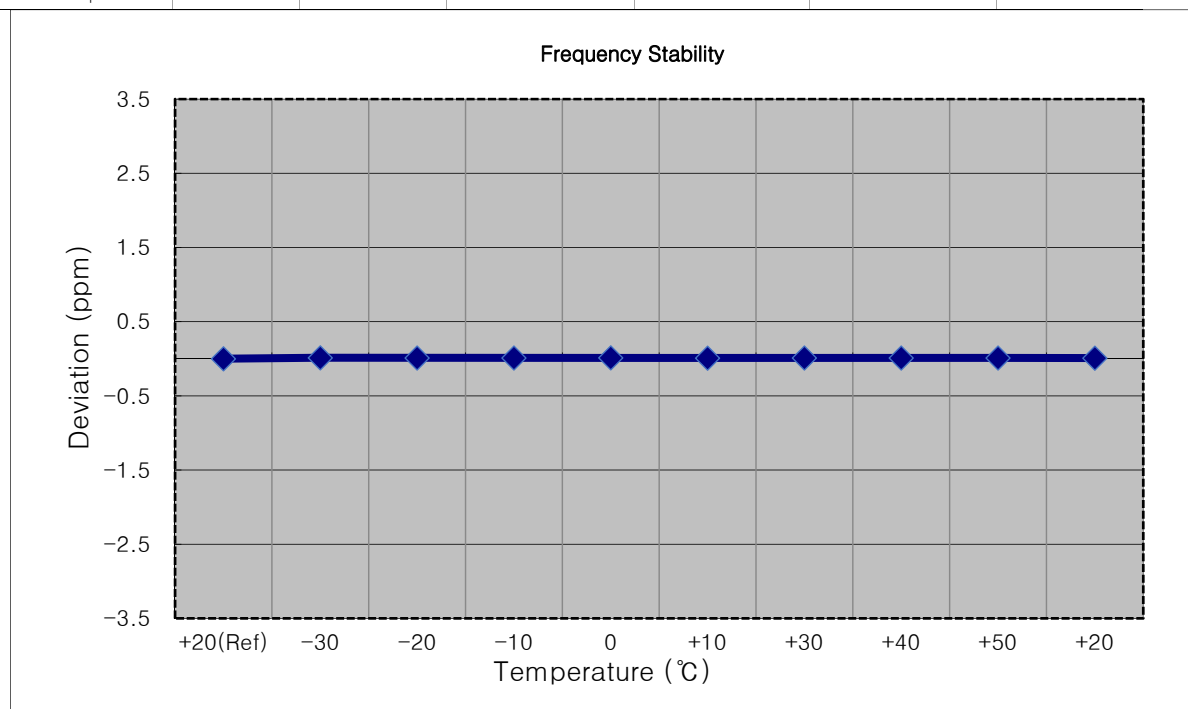


☐ Mode: GSM1900
☐ OPERATING FREQUENCY: 1880,000,000 Hz
☐ CHANNEL: 661
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1880 000 021	0.0	0.000 000	0.000
100 %		-30	1880 000 042	21.0	0.000 001	0.011
100 %		-20	1880 000 041	19.8	0.000 001	0.011
100 %		-10	1880 000 042	21.0	0.000 001	0.011
100 %		0	1880 000 043	21.7	0.000 001	0.012
100 %		+10	1880 000 044	22.5	0.000 001	0.012
100 %		+30	1880 000 042	21.2	0.000 001	0.011
100 %		+40	1880 000 042	21.4	0.000 001	0.011
100 %		+50	1880 000 041	19.7	0.000 001	0.011
Batt. Endpoint	3.300	+20	1880 000 043	22.2	0.000 001	0.012

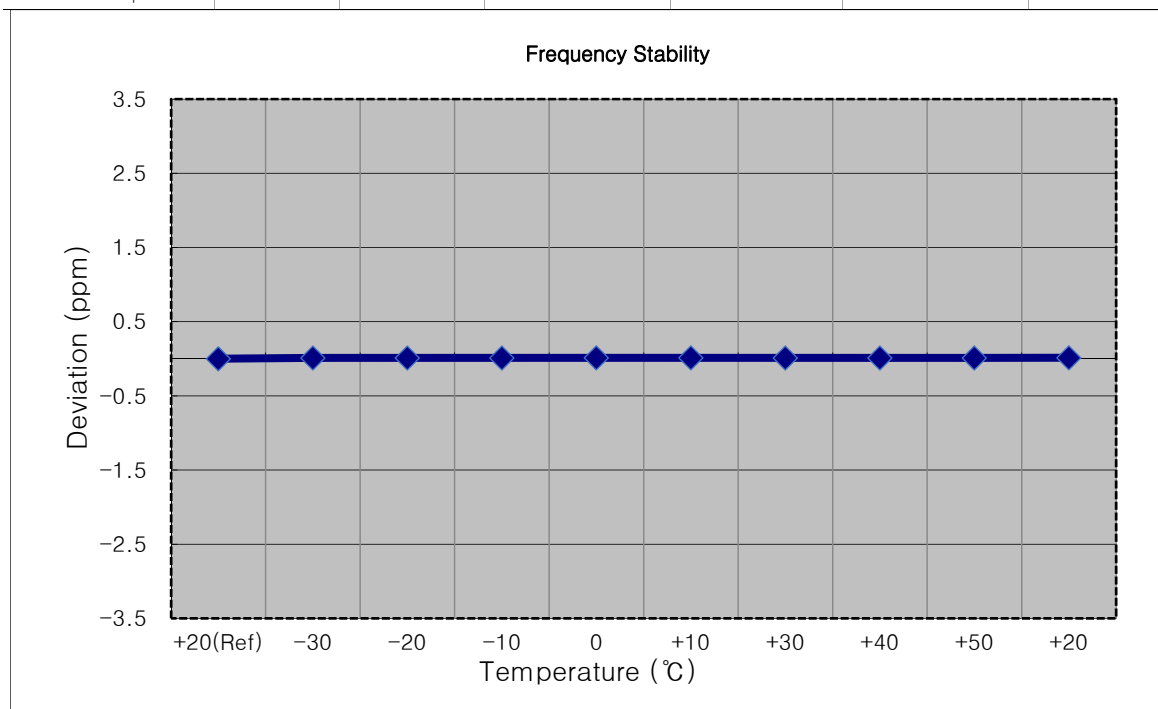


☐ Mode: GSM1900
☐ OPERATING FREQUENCY: 1909,800,000 Hz
☐ CHANNEL: 810
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1909 800 015	0.0	0.000 000	0.000
100 %		-30	1909 800 031	15.5	0.000 001	0.008
100 %		-20	1909 800 034	18.4	0.000 001	0.010
100 %		-10	1909 800 034	19.1	0.000 001	0.010
100 %		0	1909 800 034	18.9	0.000 001	0.010
100 %		+10	1909 800 035	20.3	0.000 001	0.011
100 %		+30	1909 800 031	16.3	0.000 001	0.009
100 %		+40	1909 800 033	18.0	0.000 001	0.009
100 %		+50	1909 800 035	19.8	0.000 001	0.010
Batt. Endpoint	3.300	+20	1909 800 036	21.0	0.000 001	0.011

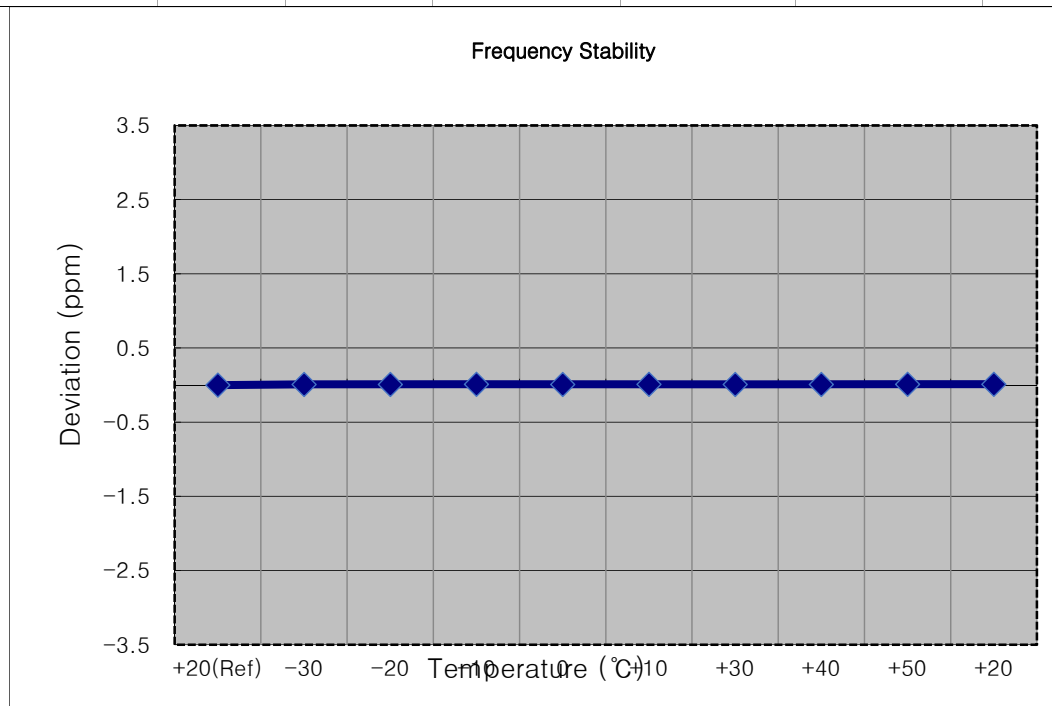


Mode: WCDMA850
 OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: $\pm 0.000\ 25\ \%$ or $2.5\ \text{ppm}$

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	836 599 999	0.0	0.000 000	0.0000
100 %		-30	836 599 998	-1.5	0.000 000	-0.0018
100 %		-20	836 599 997	-1.9	0.000 000	-0.0022
100 %		-10	836 599 998	-1.2	0.000 000	-0.0014
100 %		0	836 599 998	-1.4	0.000 000	-0.0017
100 %		+10	836 599 998	-1.5	0.000 000	-0.0018
100 %		+30	836 599 998	-1.6	0.000 000	-0.0019
100 %		+40	836 599 998	-1.2	0.000 000	-0.0014
100 %		+50	836 599 998	-1.3	0.000 000	-0.0016
Batt. Endpoint	3.300	+20	836 599 998	-1.3	0.000 000	-0.0016

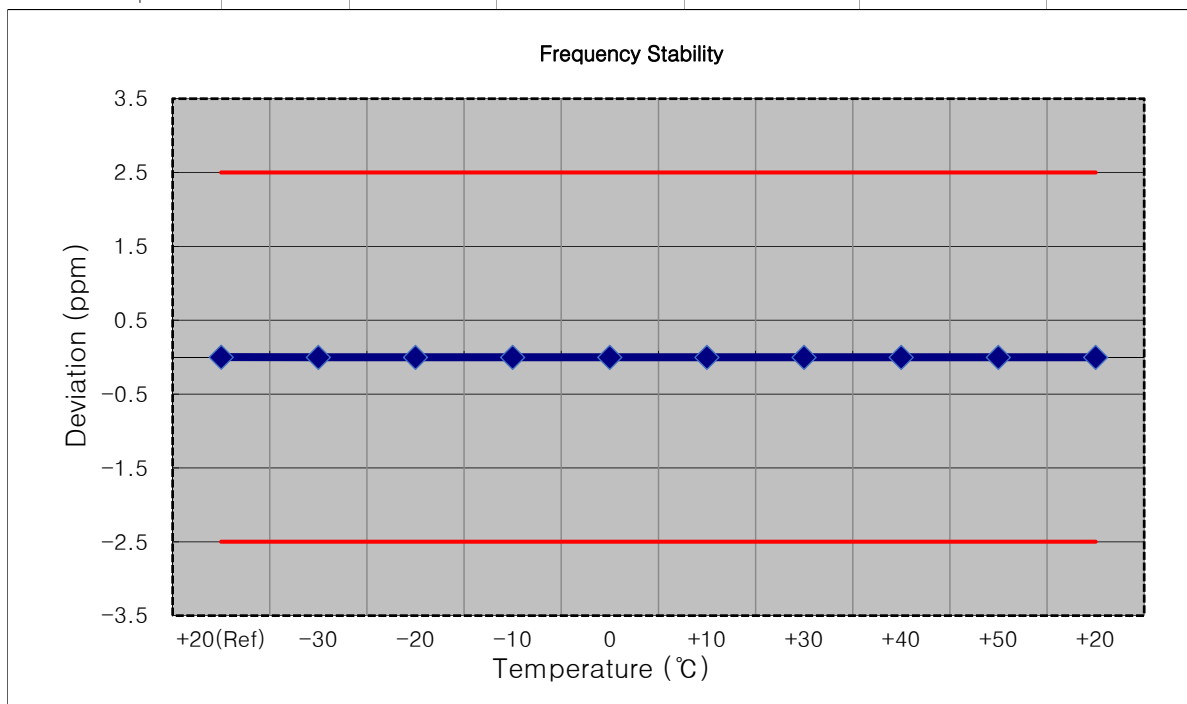


☐ Mode: WCDMA1900
☐ OPERATING FREQUENCY: 1,852,400,000 Hz
☐ CHANNEL: 9262
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1852 400 007	0.0	0.000 000	0.0000
100 %		-30	1852 400 014	6.7	0.000 000	0.0036
100 %		-20	1852 400 014	6.7	0.000 000	0.0036
100 %		-10	1852 400 014	6.7	0.000 000	0.0036
100 %		0	1852 400 015	7.5	0.000 000	0.0041
100 %		+10	1852 400 014	6.6	0.000 000	0.0036
100 %		+30	1852 400 015	7.2	0.000 000	0.0039
100 %		+40	1852 400 014	6.4	0.000 000	0.0034
100 %		+50	1852 400 014	6.6	0.000 000	0.0036
Batt. Endpoint	3.300	+20	1852 400 014	6.8	0.000 000	0.0037

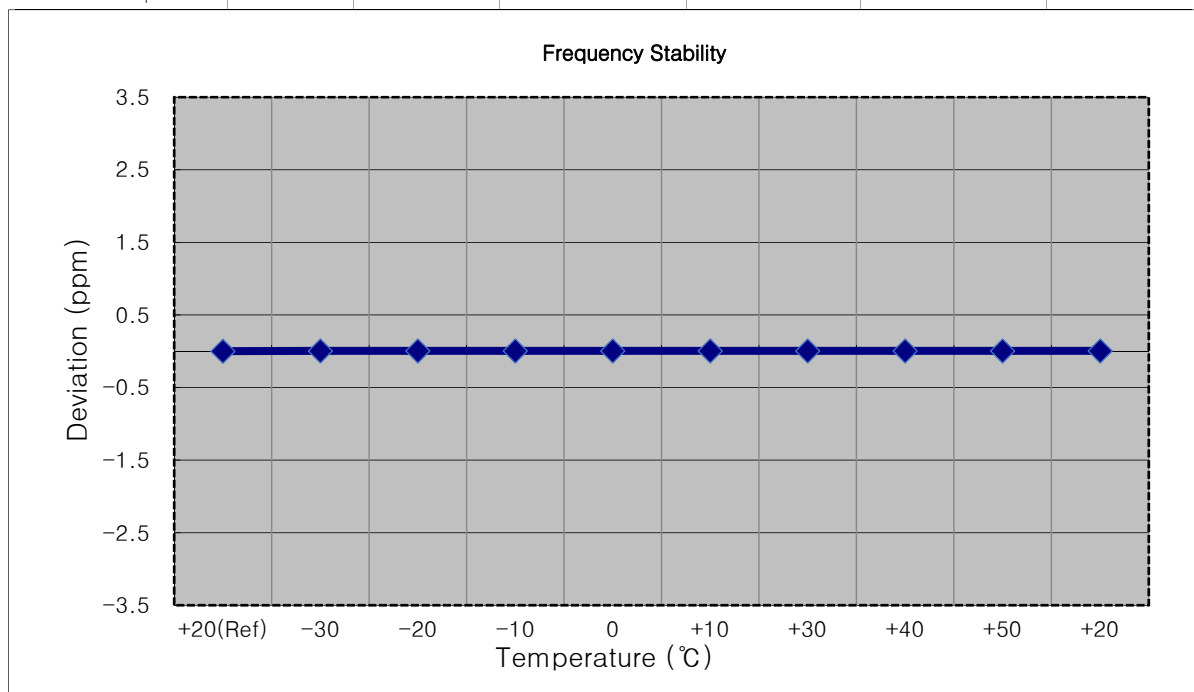


☐ Mode: WCDMA1900
☐ OPERATING FREQUENCY: 1,880,000,000 Hz
☐ CHANNEL: 9400
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1880 000 003	0.0	0.000 000	0.0000
100 %		-30	1880 000 005	2.0	0.000 000	0.0011
100 %		-20	1880 000 007	3.3	0.000 000	0.0018
100 %		-10	1880 000 007	3.4	0.000 000	0.0018
100 %		0	1880 000 007	3.6	0.000 000	0.0019
100 %		+10	1880 000 007	3.3	0.000 000	0.0017
100 %		+30	1880 000 006	2.9	0.000 000	0.0015
100 %		+40	1880 000 007	3.3	0.000 000	0.0018
100 %		+50	1880 000 006	3.1	0.000 000	0.0017
Batt. Endpoint	3.300	+20	1880 000 007	3.4	0.000 000	0.0018

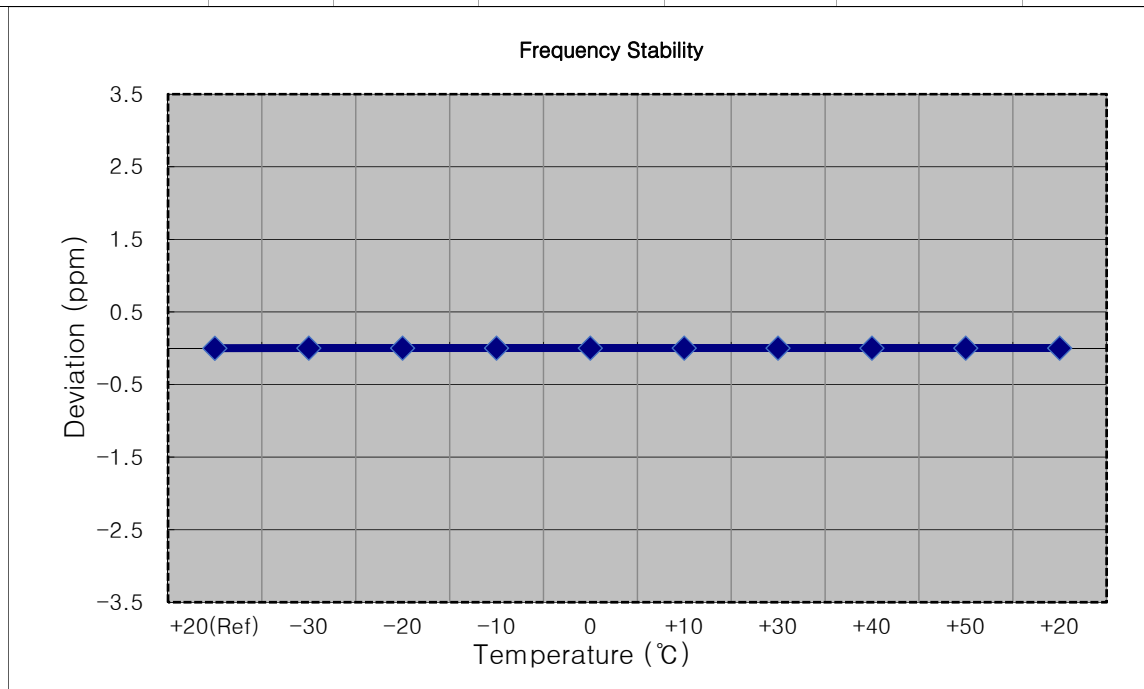


☐ Mode: WCDMA1900
☐ OPERATING FREQUENCY: 1,907,600,000 Hz
☐ CHANNEL: 9538
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1907 599 997	0.0	0.000 000	0.0000
100 %		-30	1907 599 995	-2.0	0.000 000	-0.0010
100 %		-20	1907 599 994	-2.8	0.000 000	-0.0015
100 %		-10	1907 599 994	-2.5	0.000 000	-0.0013
100 %		0	1907 599 995	-1.8	0.000 000	-0.0009
100 %		+10	1907 599 994	-2.6	0.000 000	-0.0014
100 %		+30	1907 599 995	-2.1	0.000 000	-0.0011
100 %		+40	1907 599 994	-2.7	0.000 000	-0.0014
100 %		+50	1907 599 994	-3.2	0.000 000	-0.0017
Batt. Endpoint	3.300	+20	1907 599 994	-2.6	0.000 000	-0.0013

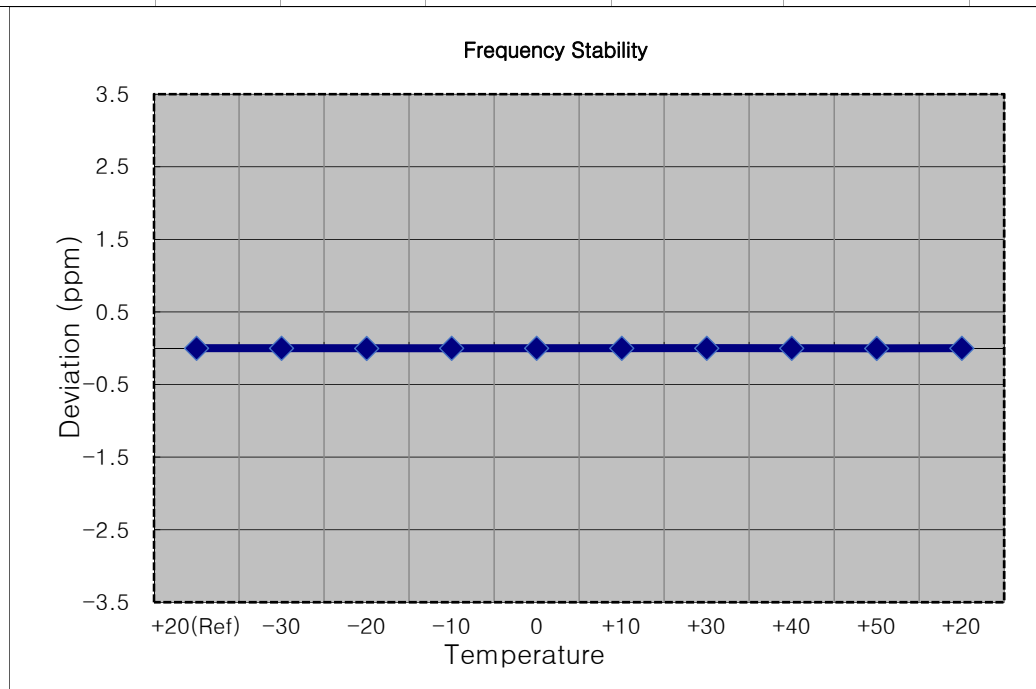


☐ Mode: WCDMA1700
☐ OPERATING FREQUENCY: 1,712,400,000 Hz
☐ CHANNEL: 1312
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1712 400 014	0.0	0.000 000	0.0000
100 %		-30	1712 400 027	12.8	0.000 001	0.0075
100 %		-20	1712 400 027	13.1	0.000 001	0.0077
100 %		-10	1712 400 028	14.3	0.000 001	0.0084
100 %		0	1712 400 028	14.1	0.000 001	0.0083
100 %		+10	1712 400 027	13.3	0.000 001	0.0077
100 %		+30	1712 400 028	14.3	0.000 001	0.0084
100 %		+40	1712 400 027	13.5	0.000 001	0.0079
100 %		+50	1712 400 026	12.6	0.000 001	0.0073
Batt. Endpoint	3.300	+20	1712 400 027	13.0	0.000 001	0.0076

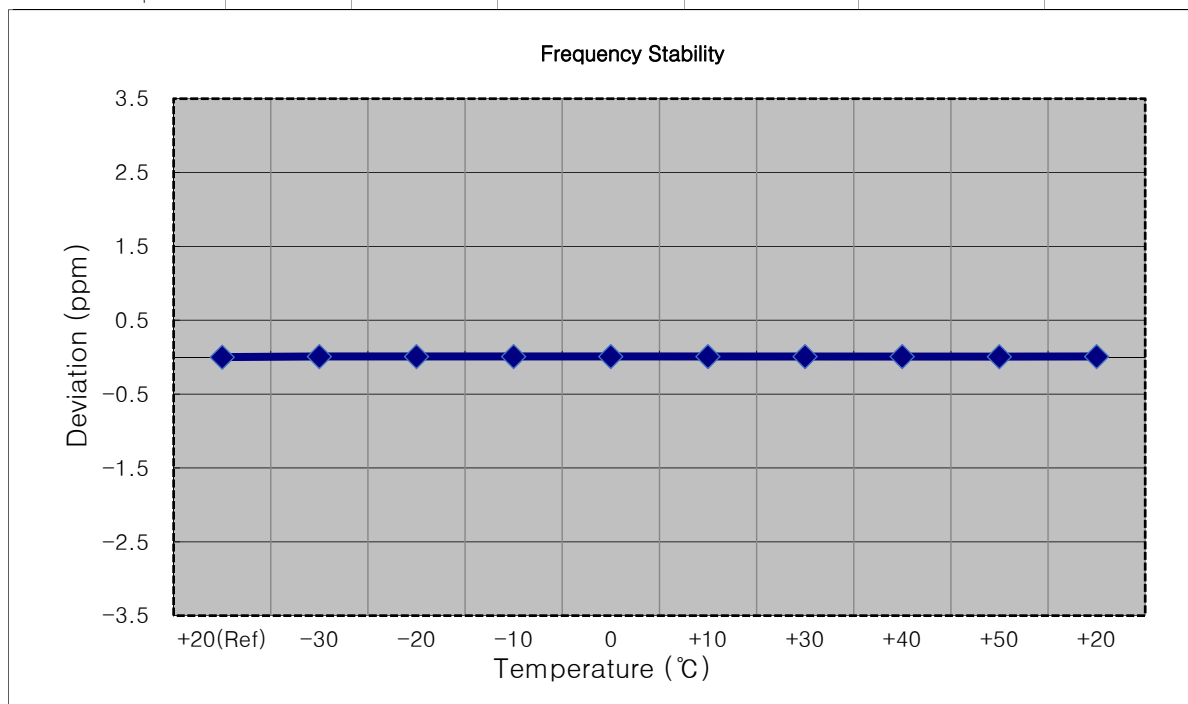


Mode: WCDMA1700
 OPERATING FREQUENCY: 1,732,400,000 Hz
 CHANNEL: 1412
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 400 002	0.0	0.000 000	0.0000
100 %		-30	1732 400 004	2.0	0.000 000	0.0011
100 %		-20	1732 400 004	2.2	0.000 000	0.0013
100 %		-10	1732 400 004	2.5	0.000 000	0.0015
100 %		0	1732 400 004	2.2	0.000 000	0.0013
100 %		+10	1732 400 005	3.4	0.000 000	0.0020
100 %		+30	1732 400 004	2.0	0.000 000	0.0011
100 %		+40	1732 400 004	2.2	0.000 000	0.0013
100 %		+50	1732 400 003	1.4	0.000 000	0.0008
Batt. Endpoint	3.300	+20	1732 400 004	2.2	0.000 000	0.0013

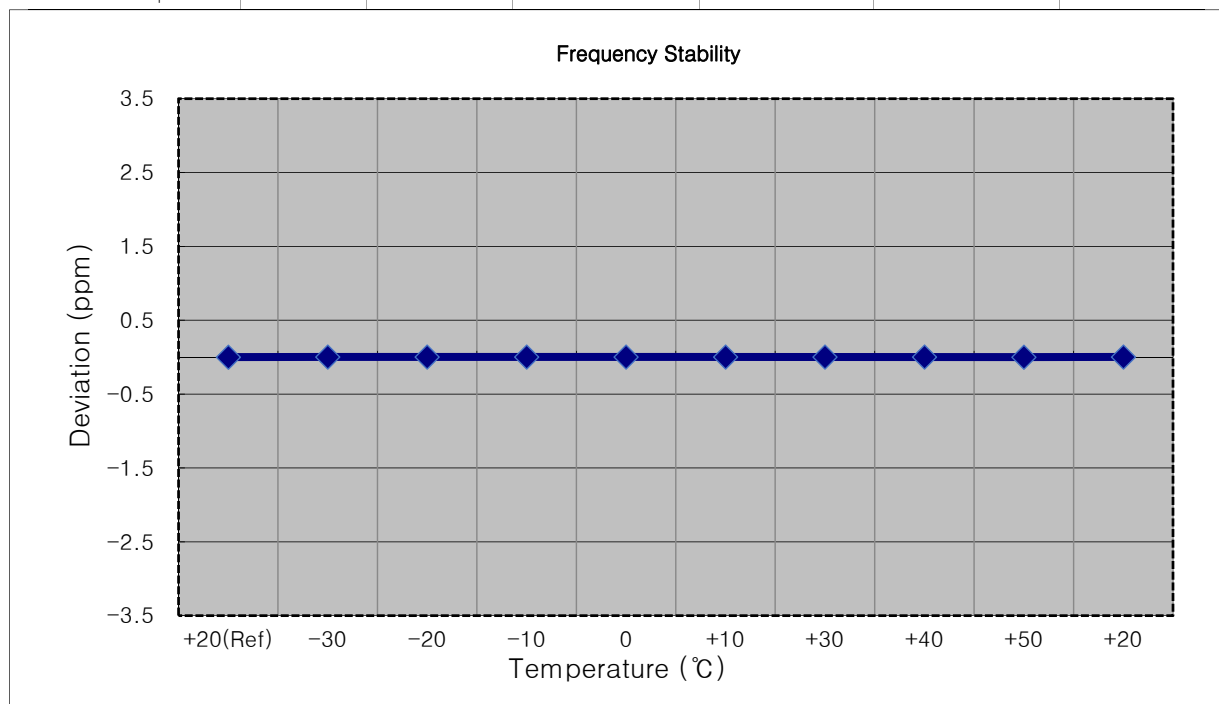

☐ Mode: WCDMA1700
☐ OPERATING FREQUENCY: 1,752,600,000 Hz
☐ CHANNEL: 1513
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band


Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	1752 599 988	0.0	0.000 000	0.0000
100 %		-30	1752 599 977	-11.2	-0.000 001	-0.0064
100 %		-20	1752 599 977	-11.6	-0.000 001	-0.0066
100 %		-10	1752 599 977	-10.9	-0.000 001	-0.0062
100 %		0	1752 599 977	-11.6	-0.000 001	-0.0066
100 %		+10	1752 599 977	-11.6	-0.000 001	-0.0066
100 %		+30	1752 599 977	-11.2	-0.000 001	-0.0064
100 %		+40	1752 599 976	-12.4	-0.000 001	-0.0071
100 %		+50	1752 599 977	-10.8	-0.000 001	-0.0061
Batt. Endpoint	3.300	+20	1752 599 977	-11.4	-0.000 001	-0.0065

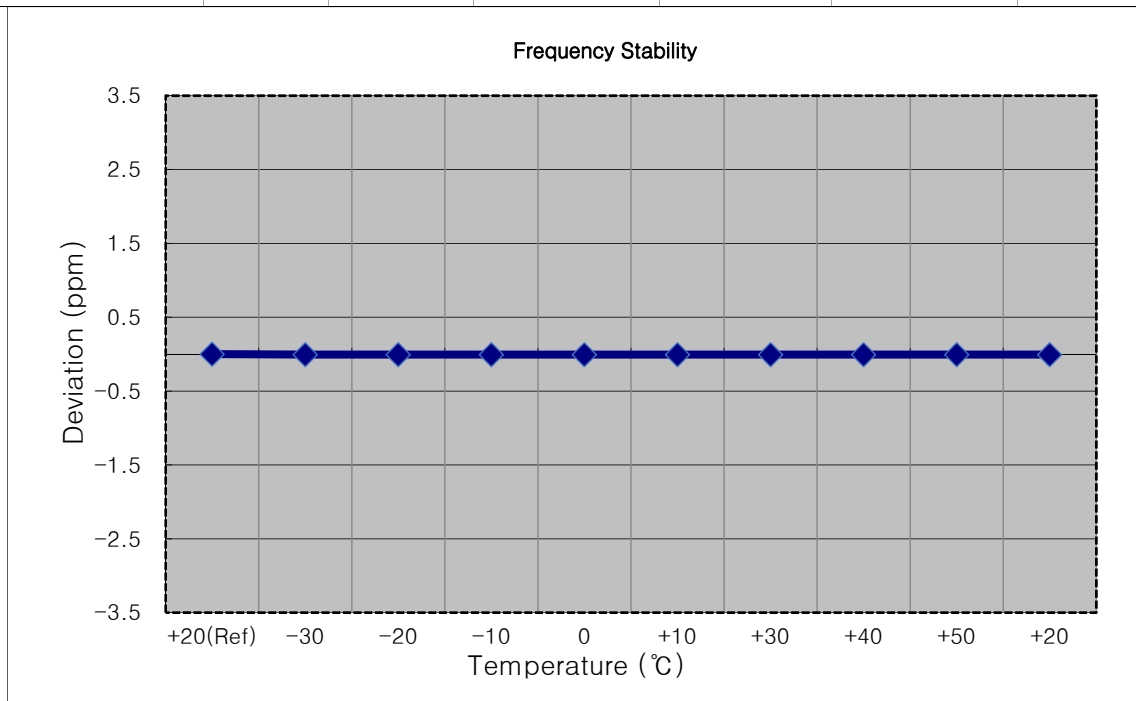


9. TEST PLOTS

9.1 OCCUPIED BANDWIDTH


■ GSM850 MODE (128 CH.) Occupied Bandwidth

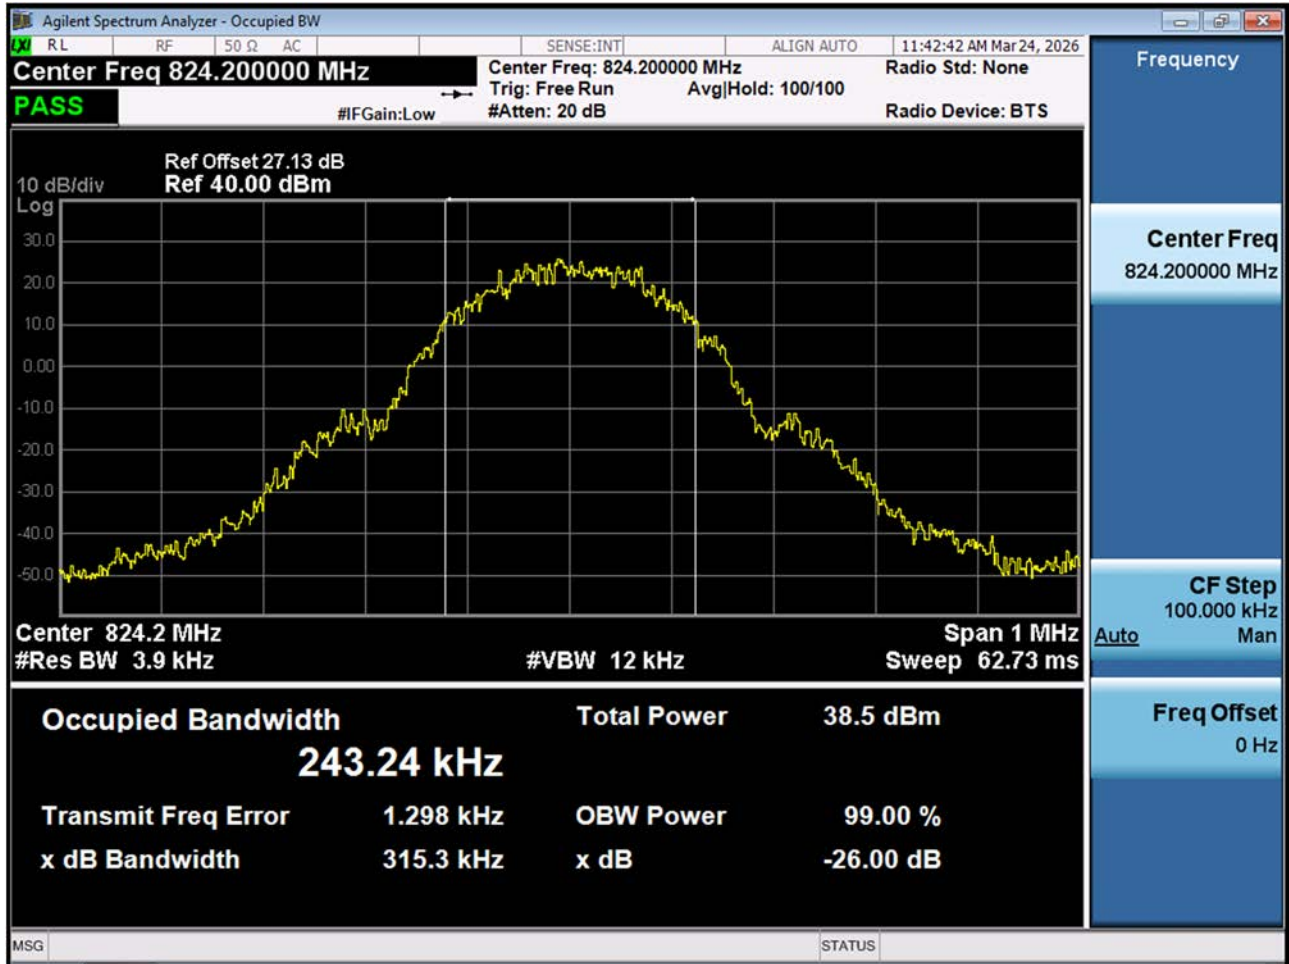


■ GSM850 MODE (190 CH.) Occupied Bandwidth

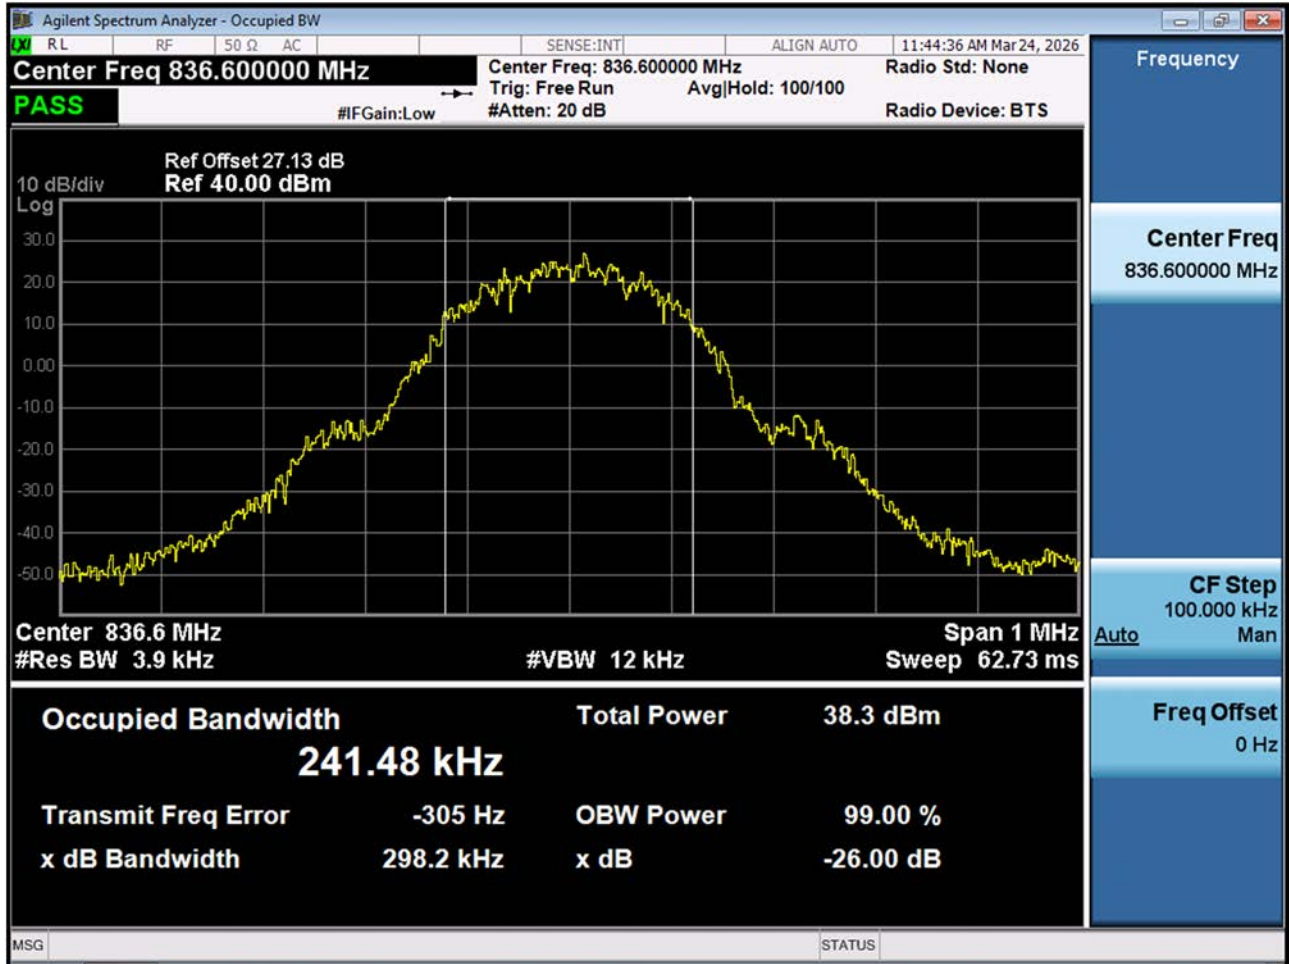


■ GSM850 MODE (251 CH.) Occupied Bandwidth

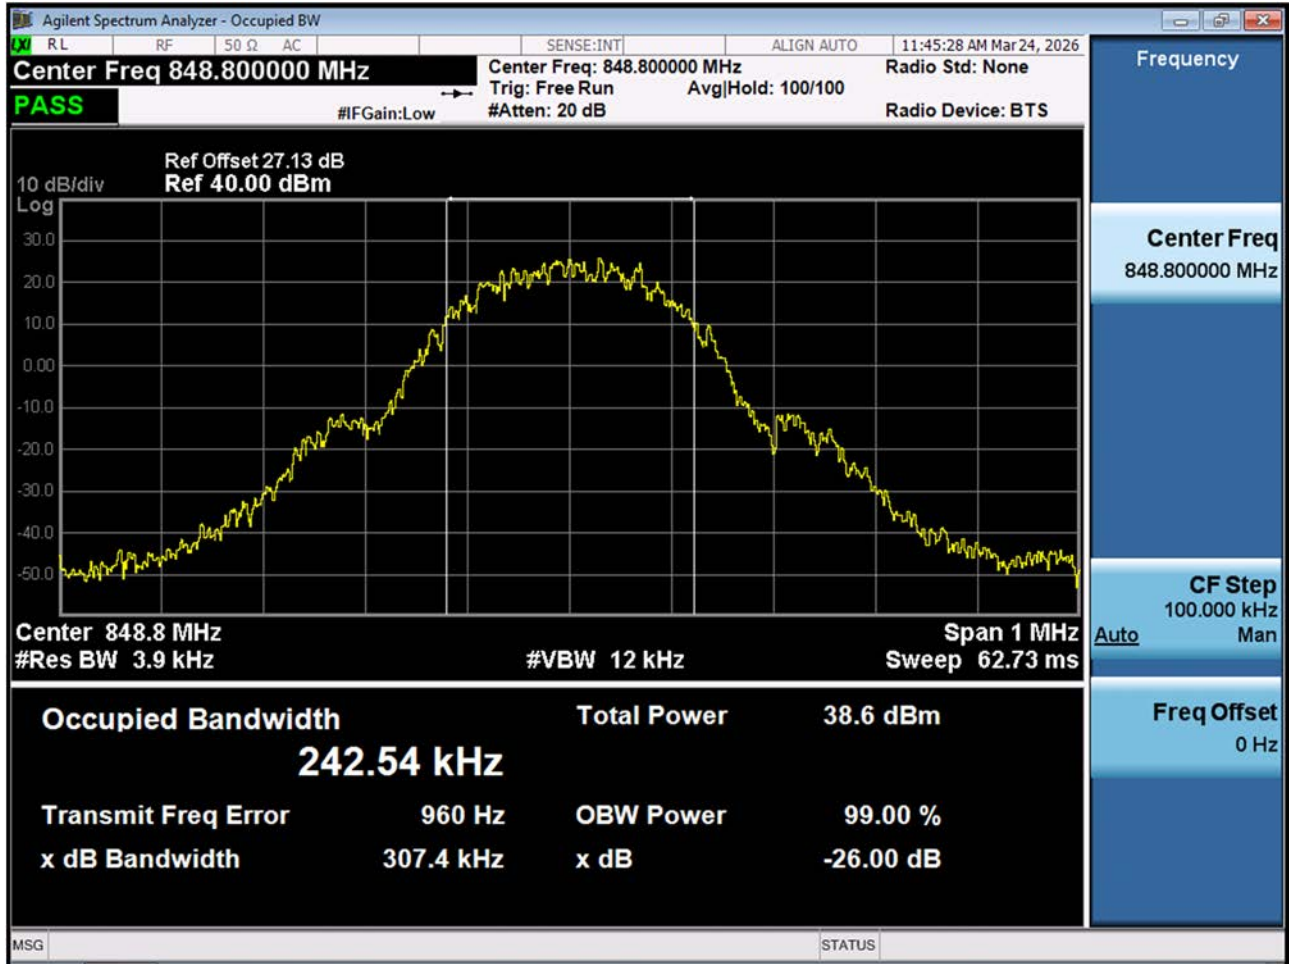


■ GSM850 EDGE (128 CH.) Occupied Bandwidth

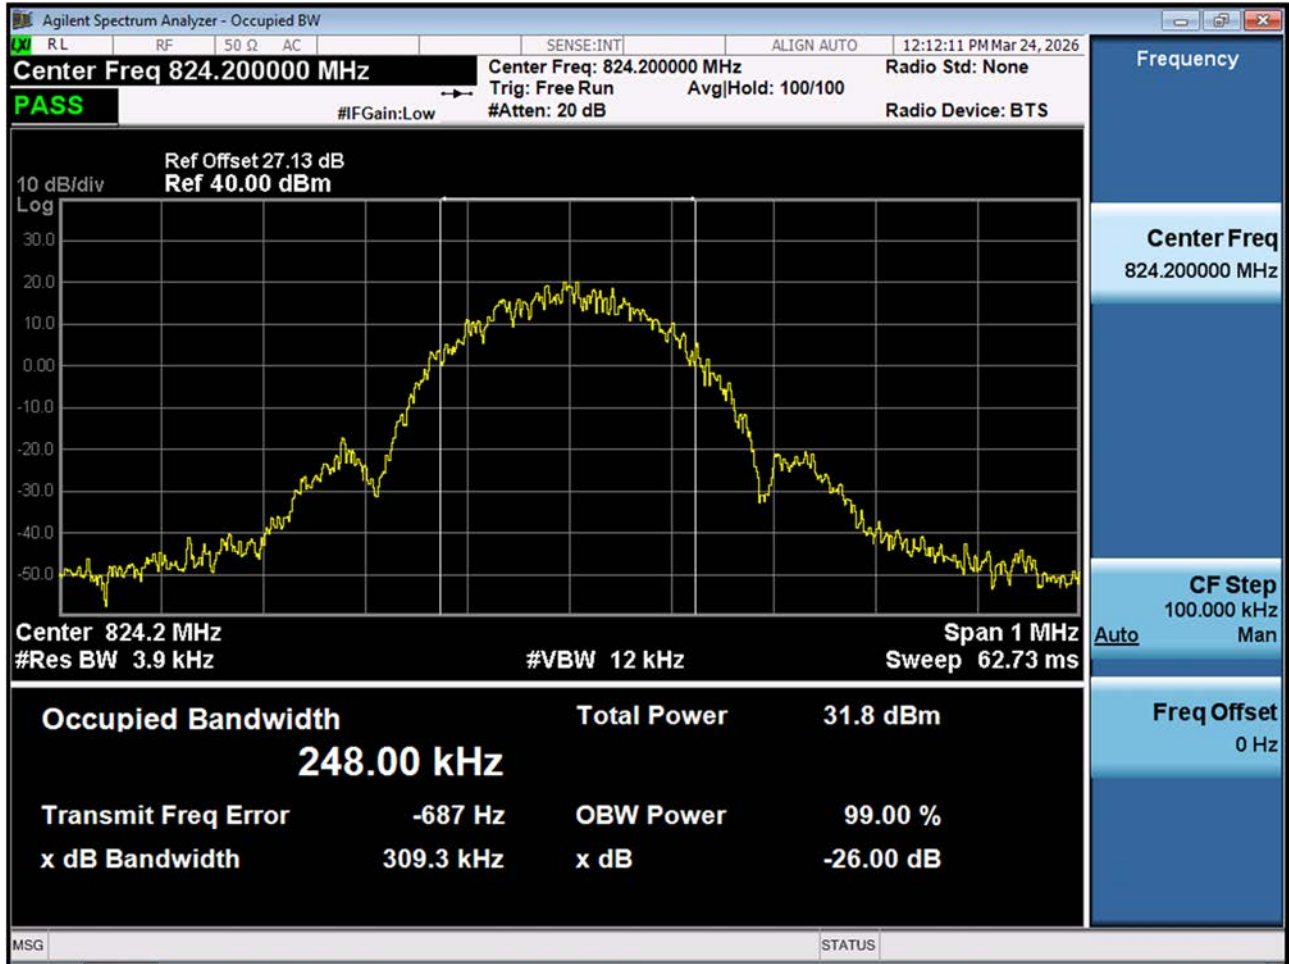


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

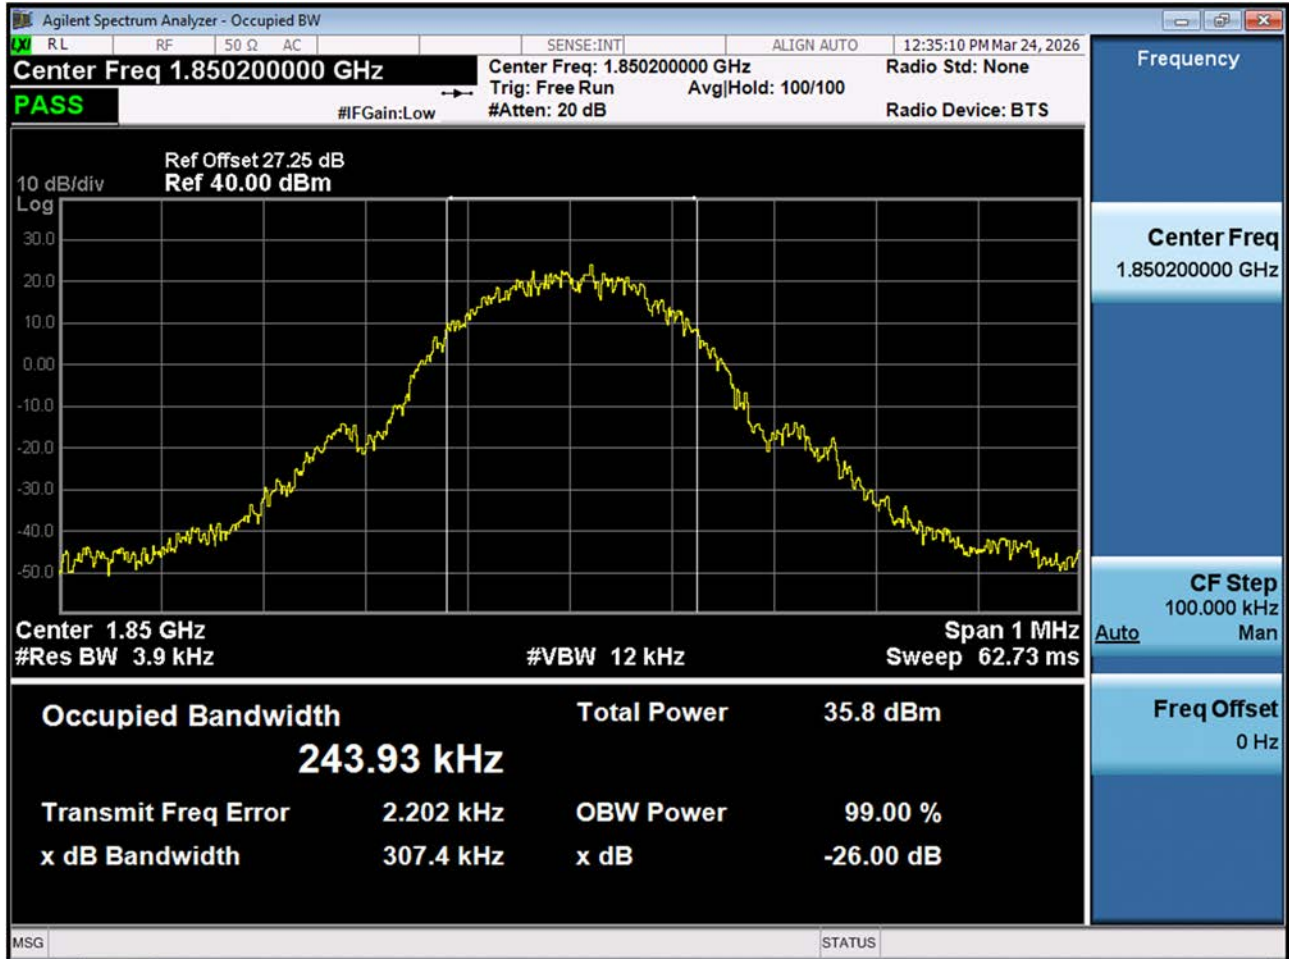


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

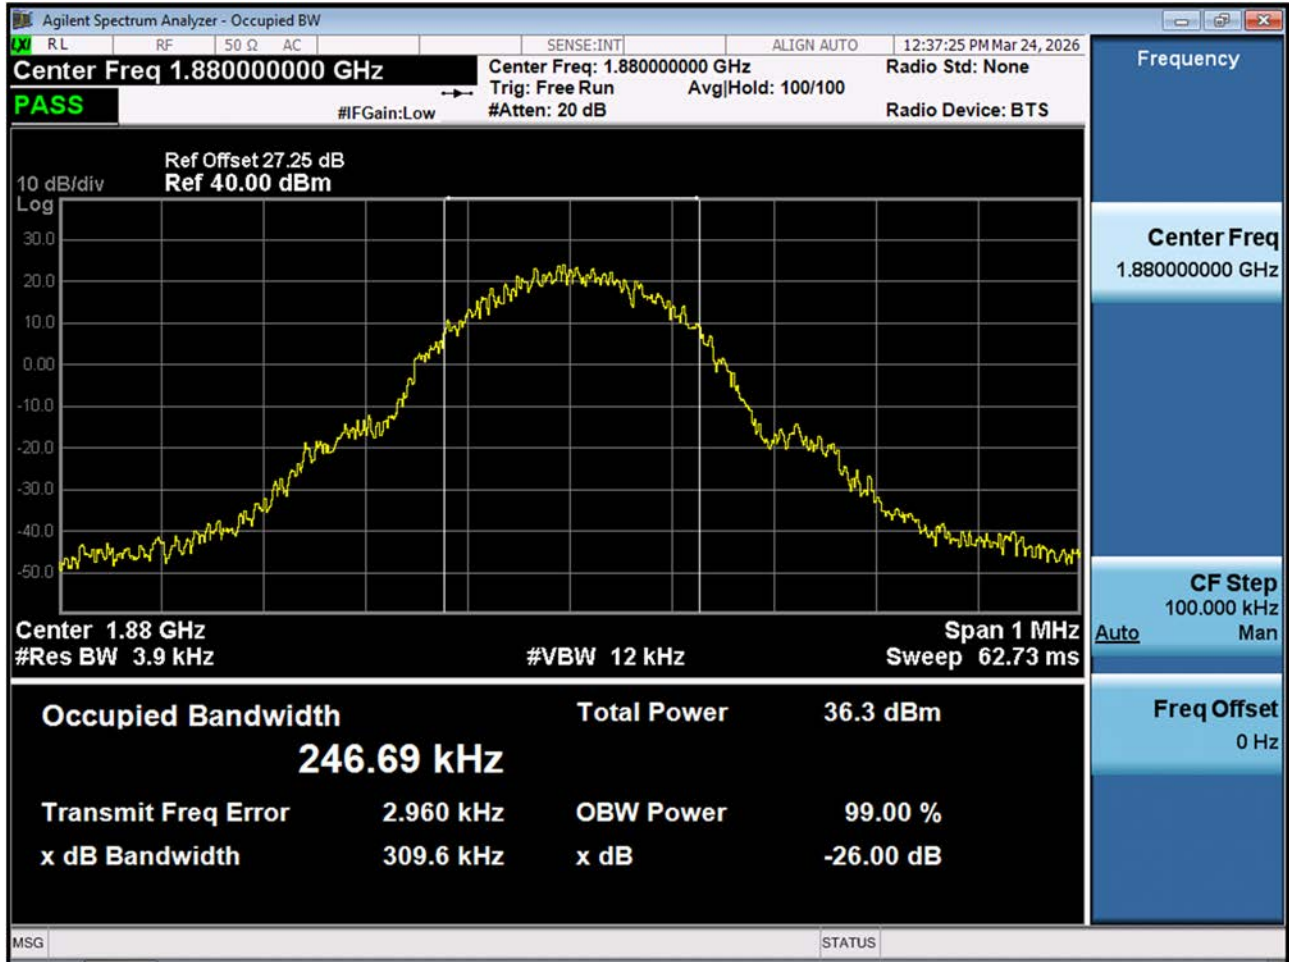


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

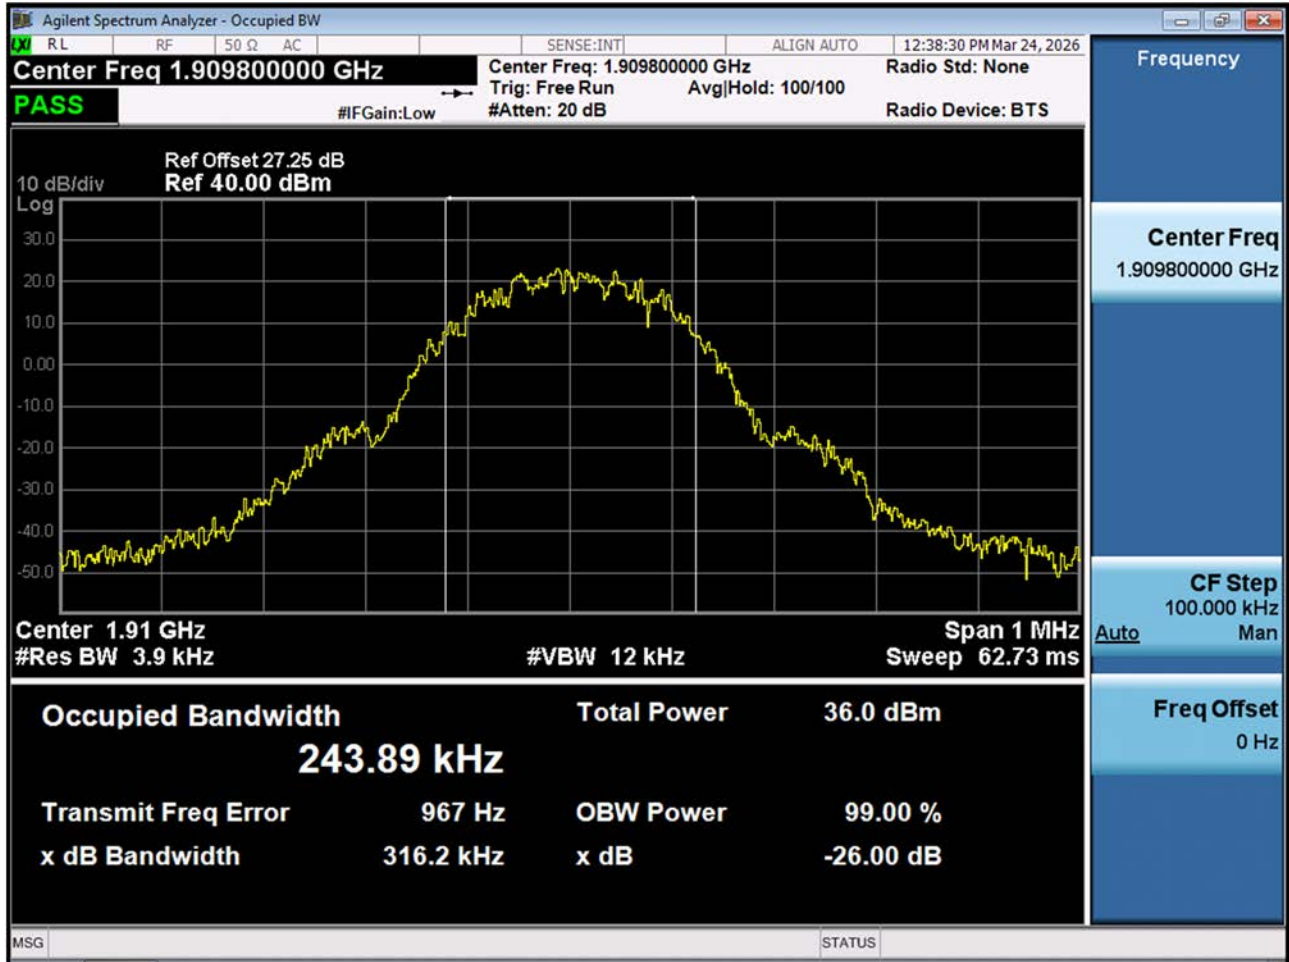


■ GSM1900 EDGE (810 CH.) Occupied Bandwidth

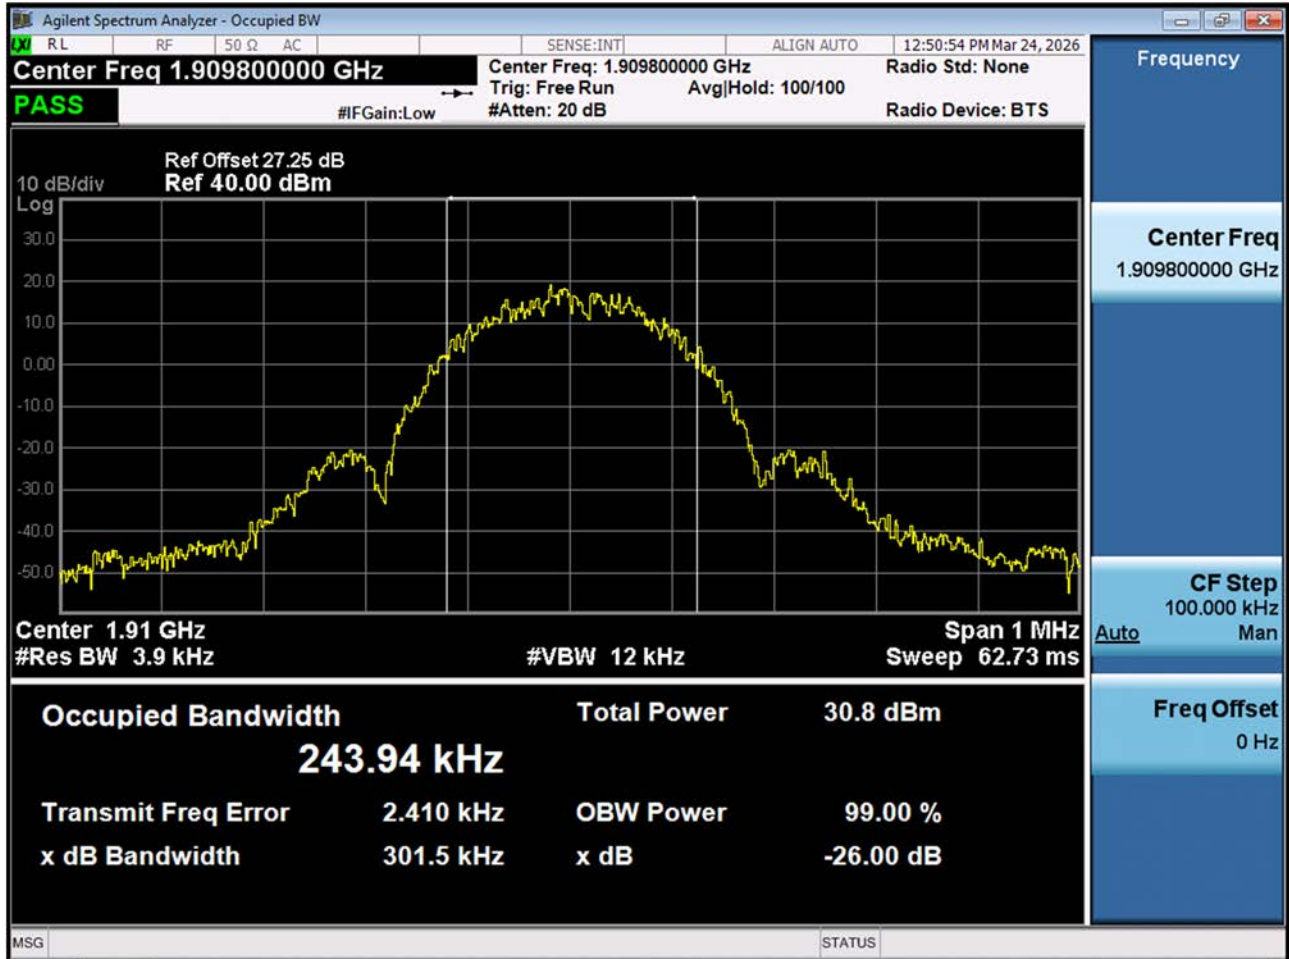


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

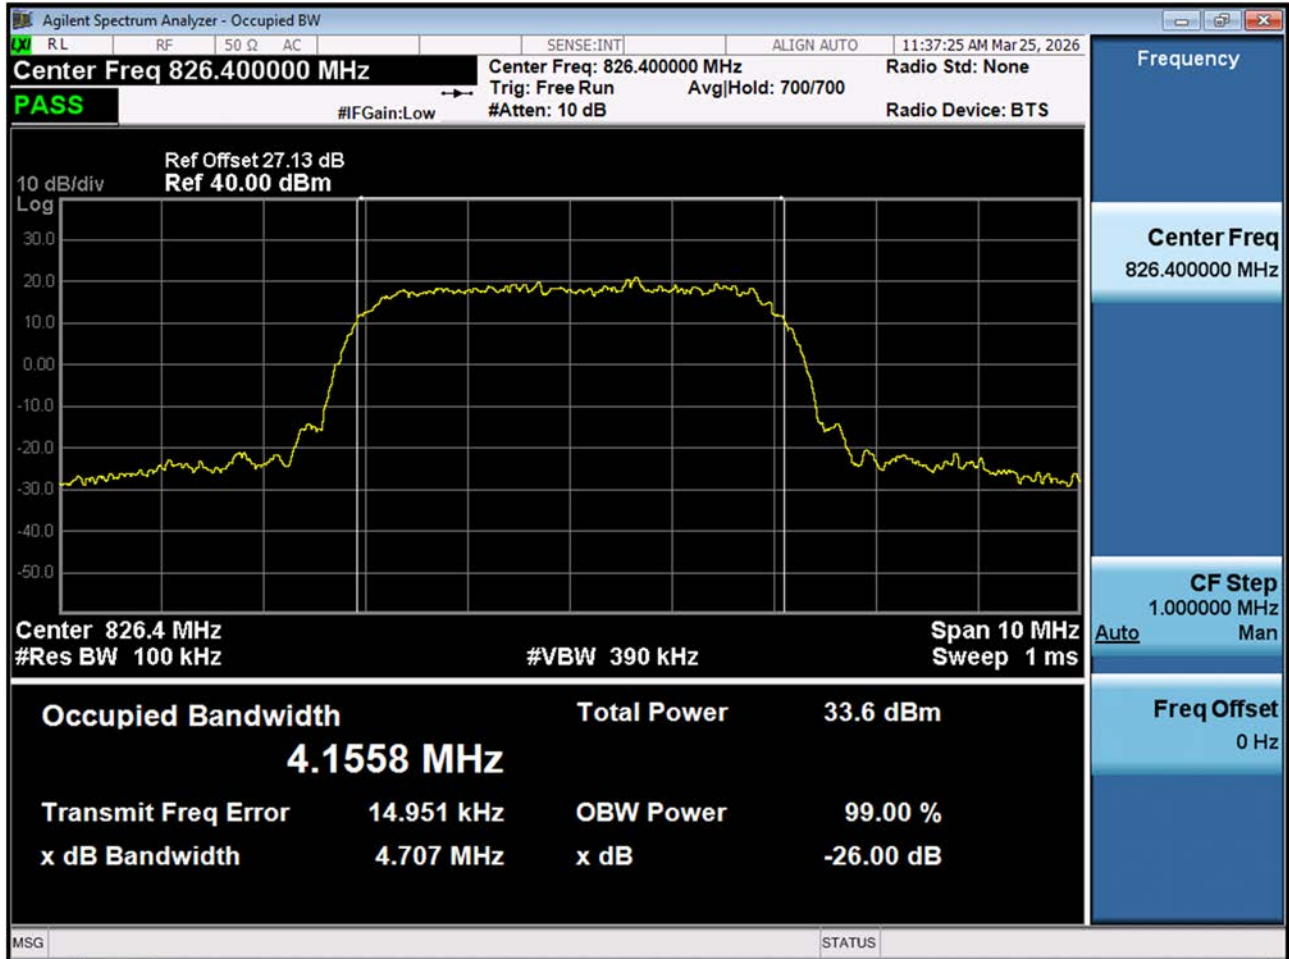


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

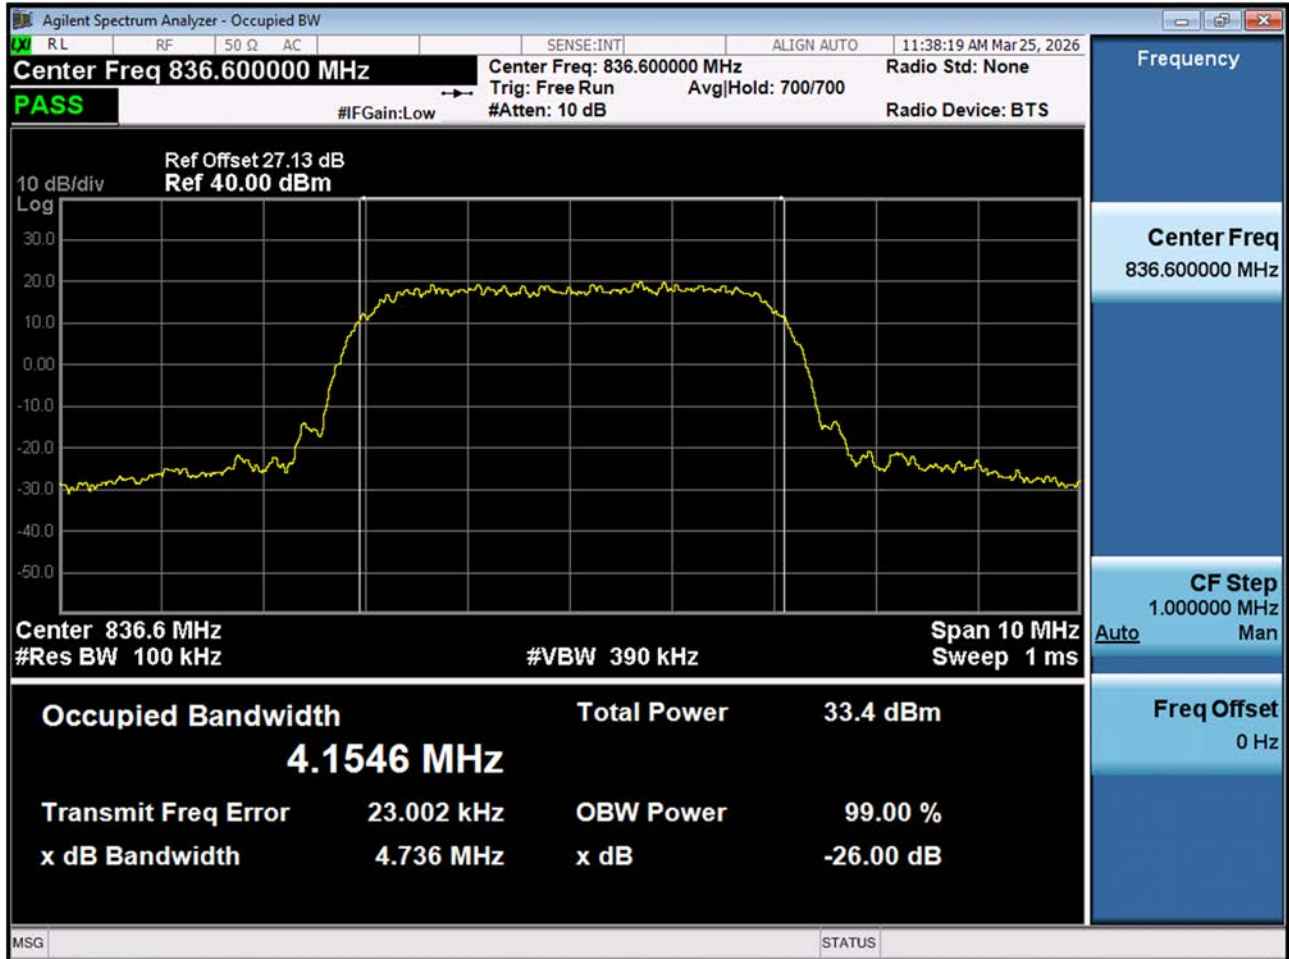


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

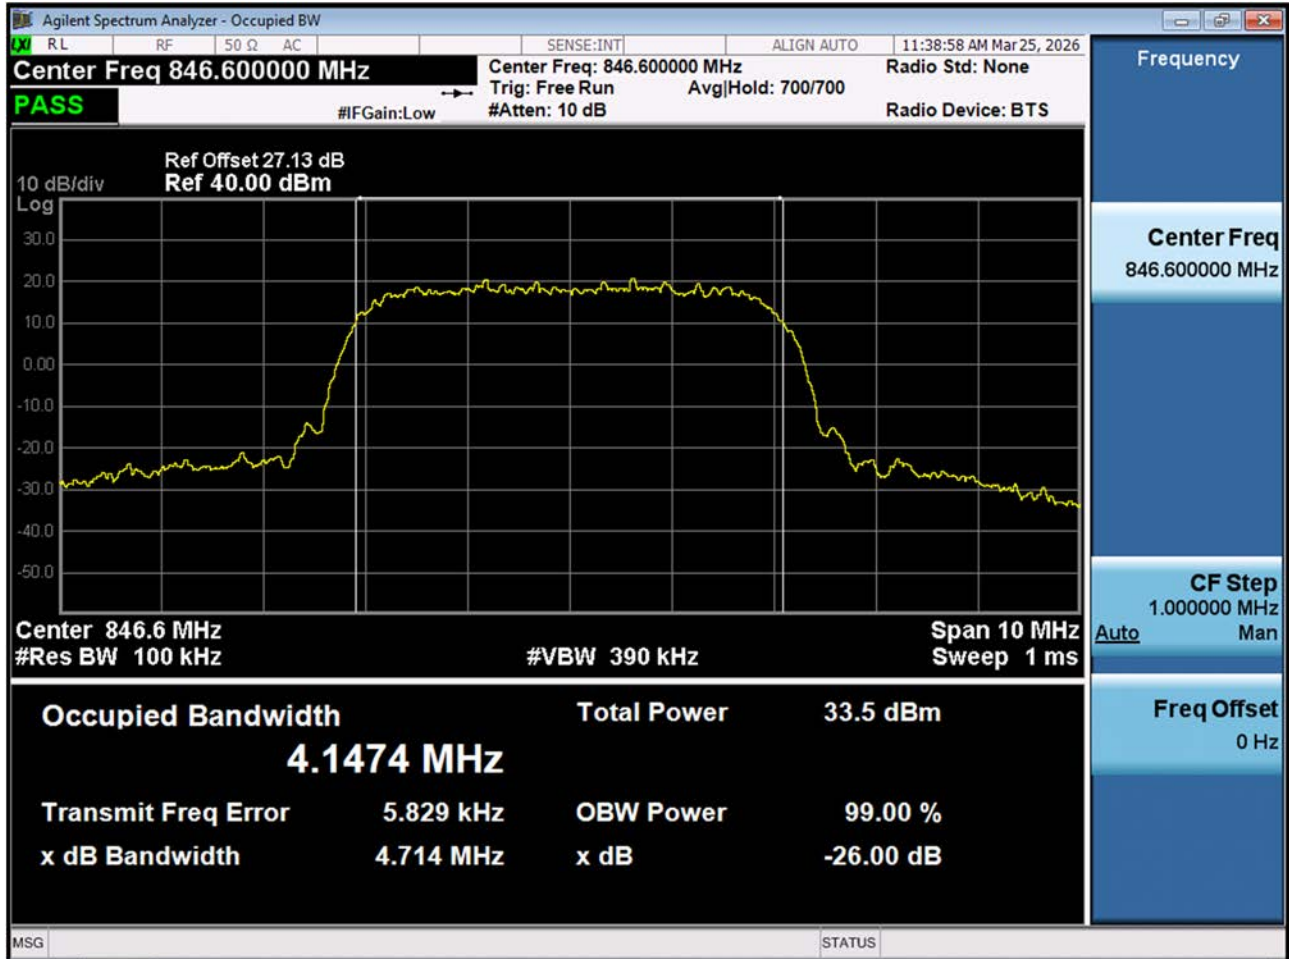


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

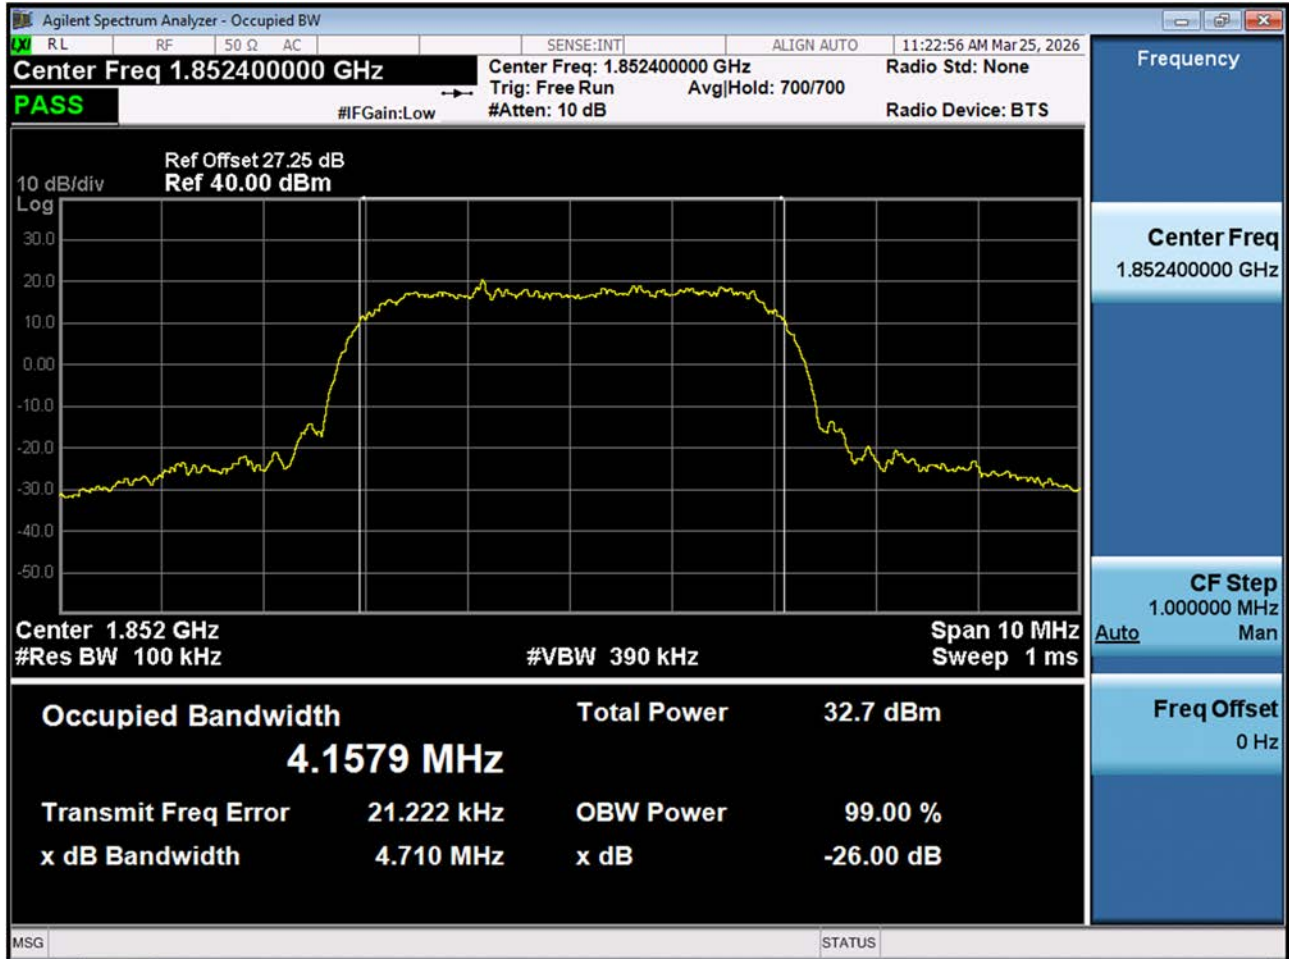


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

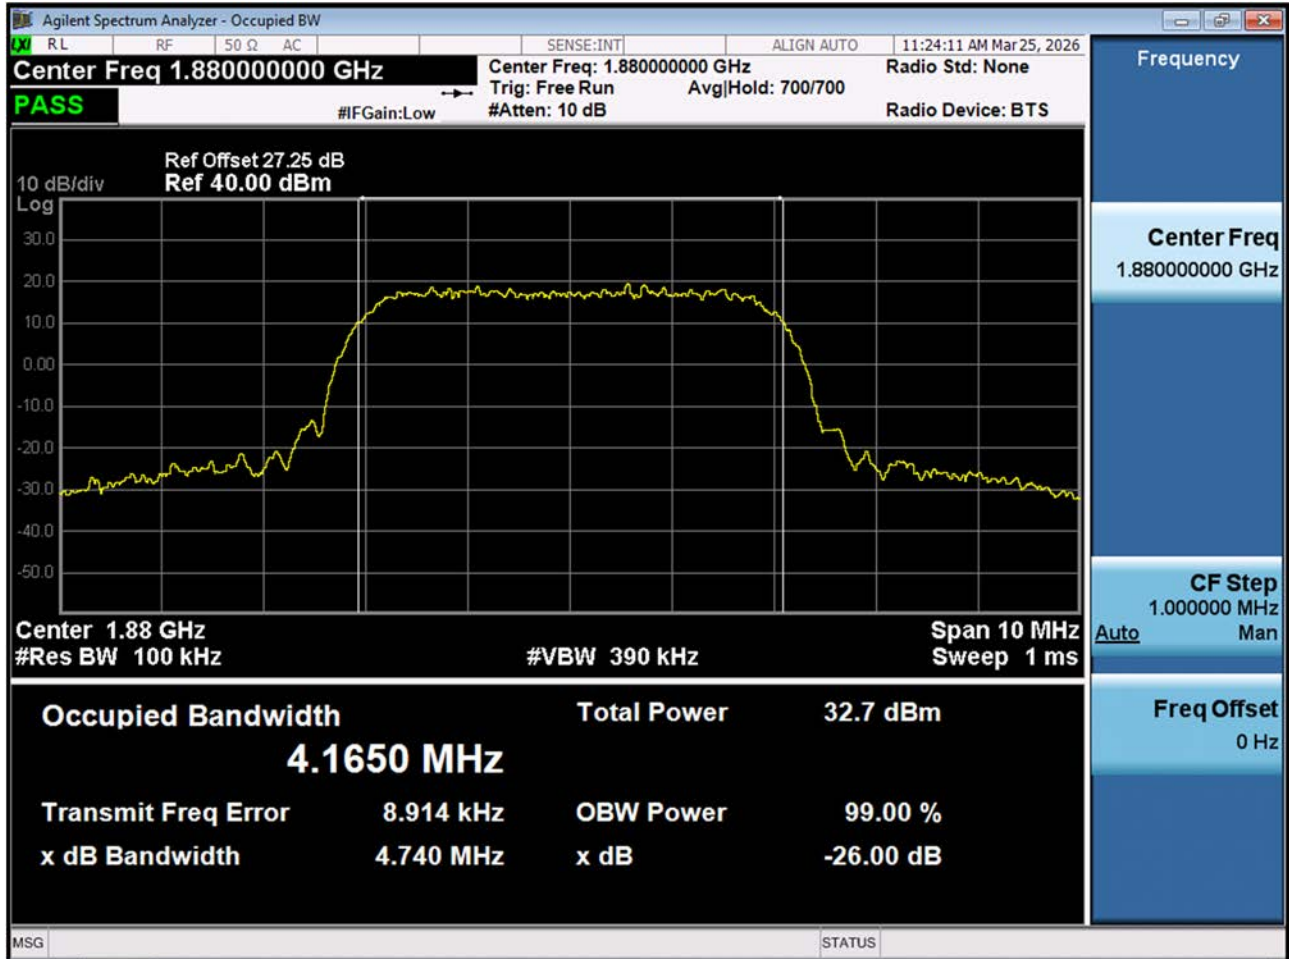


WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

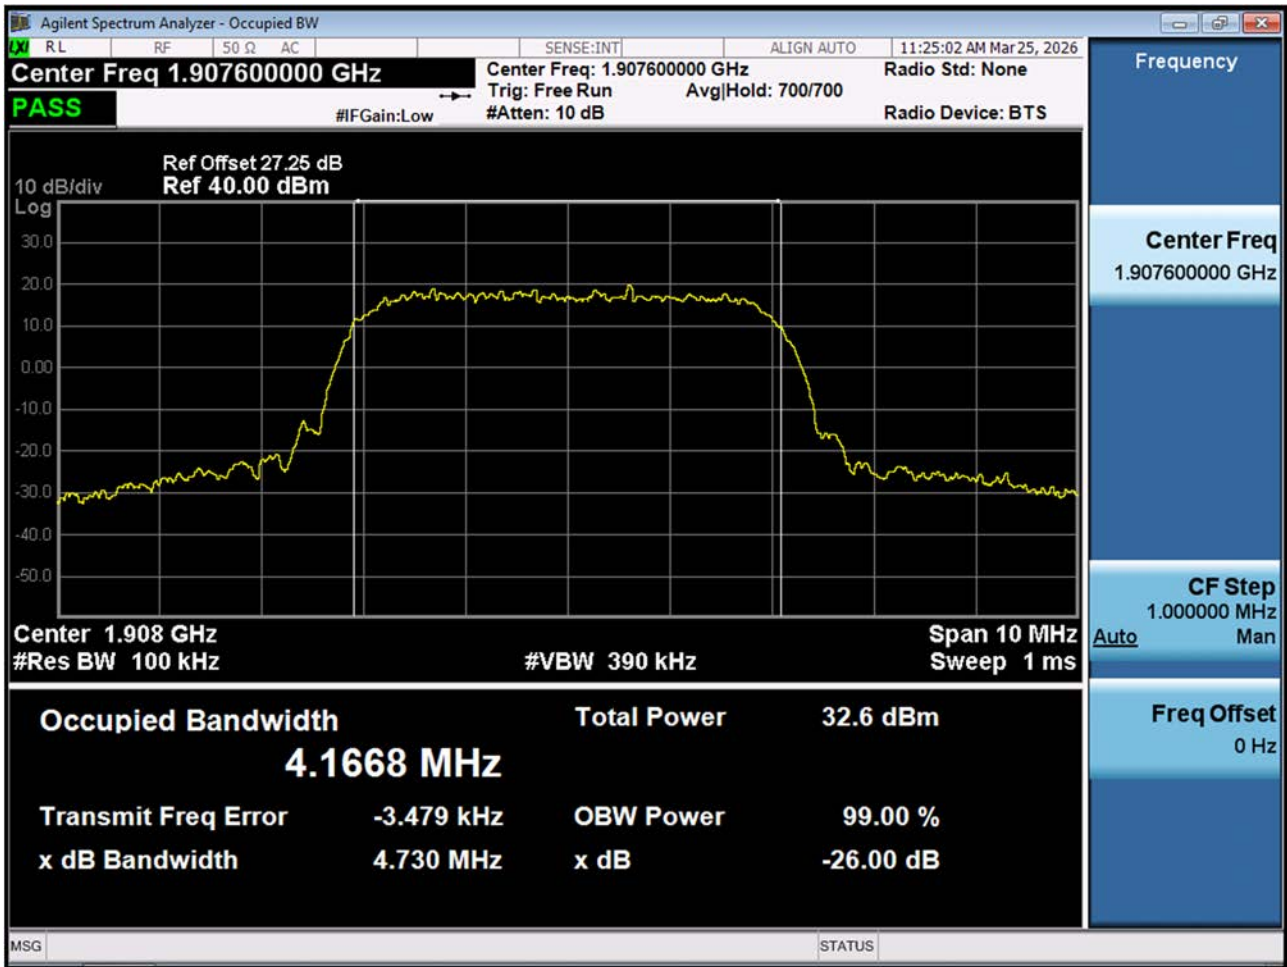


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

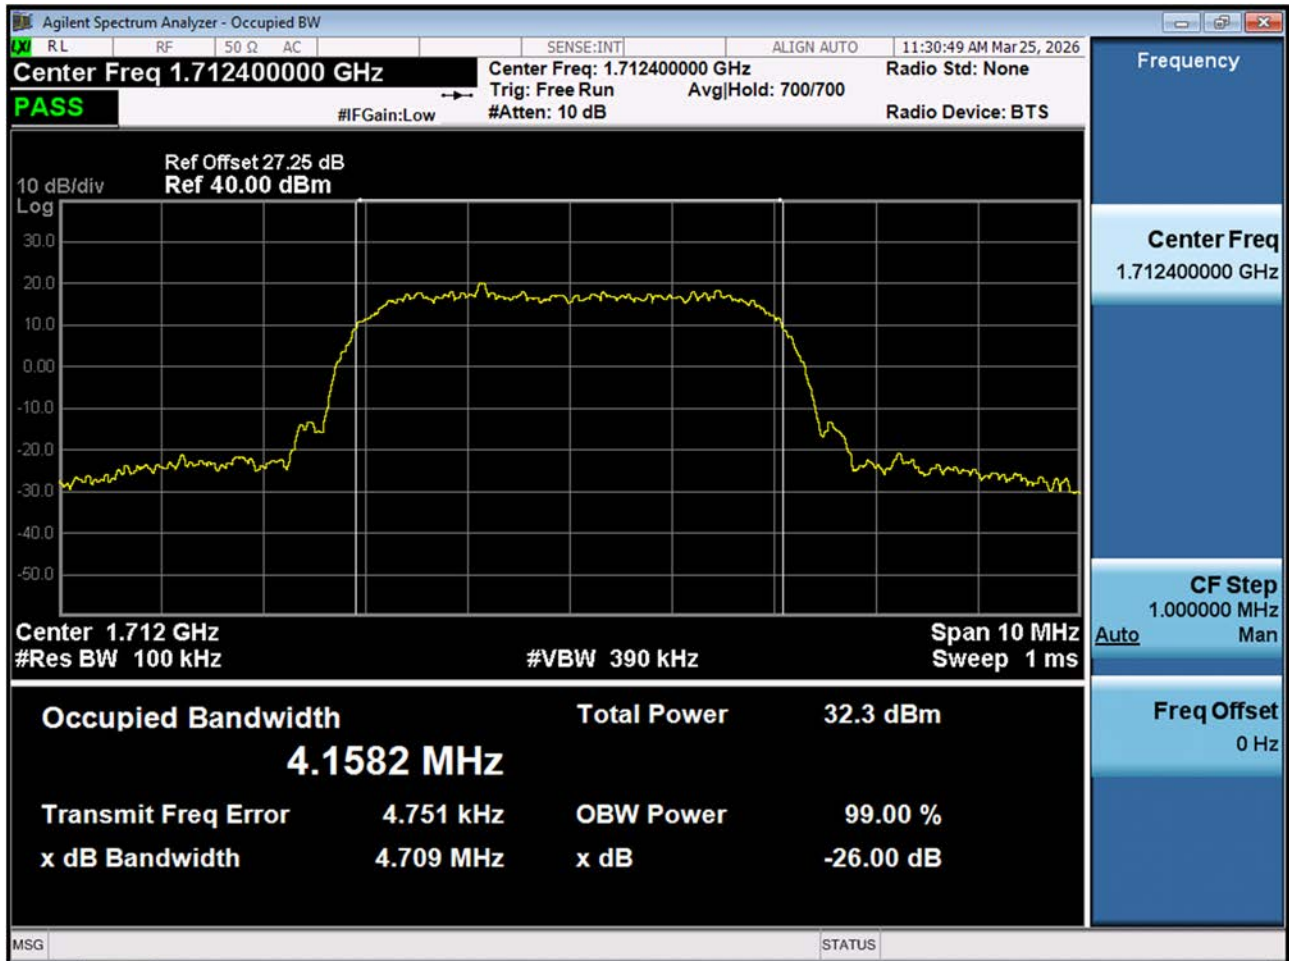

■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

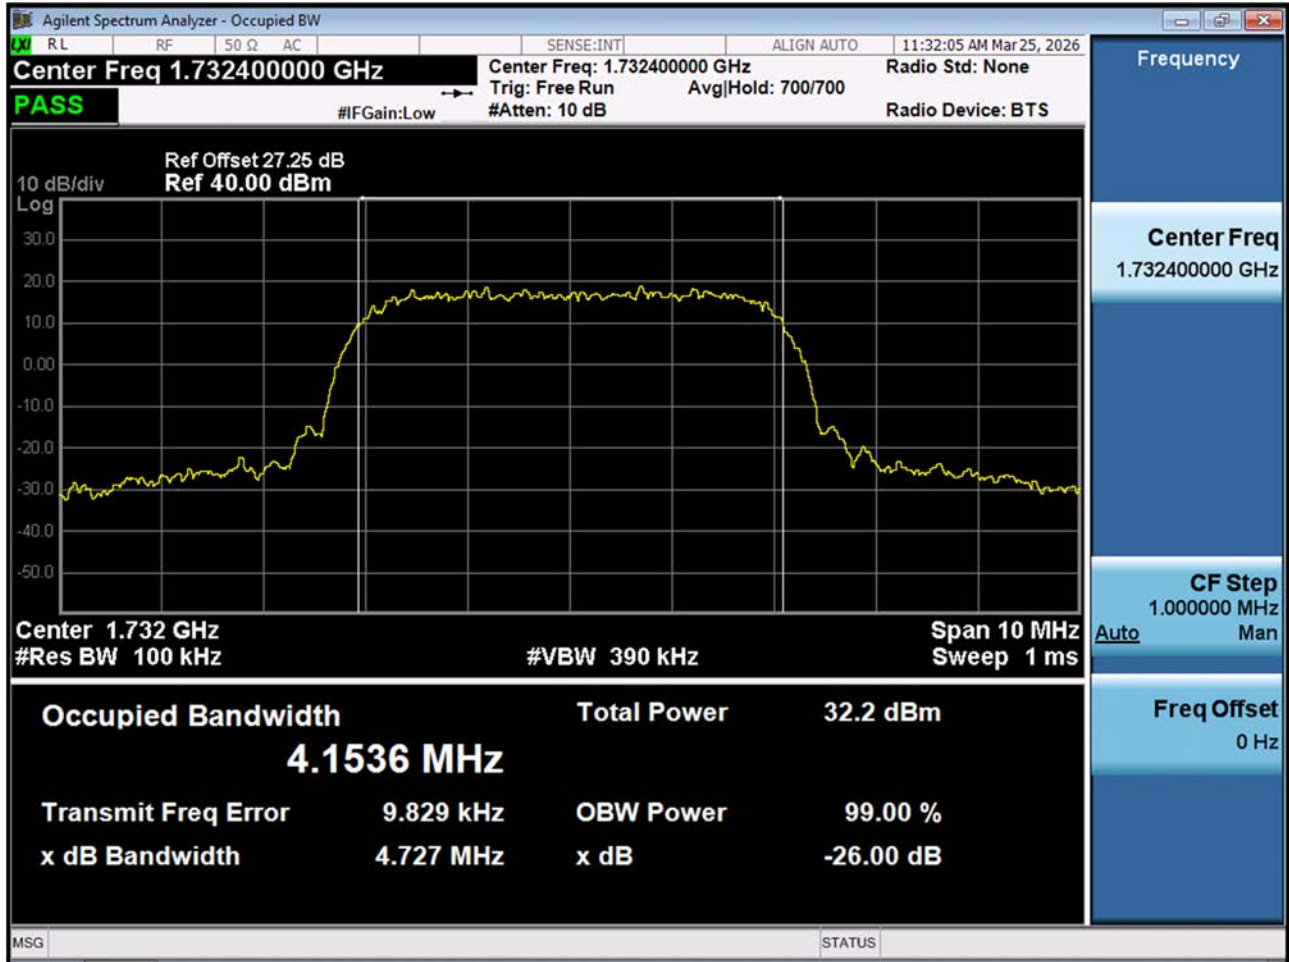


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

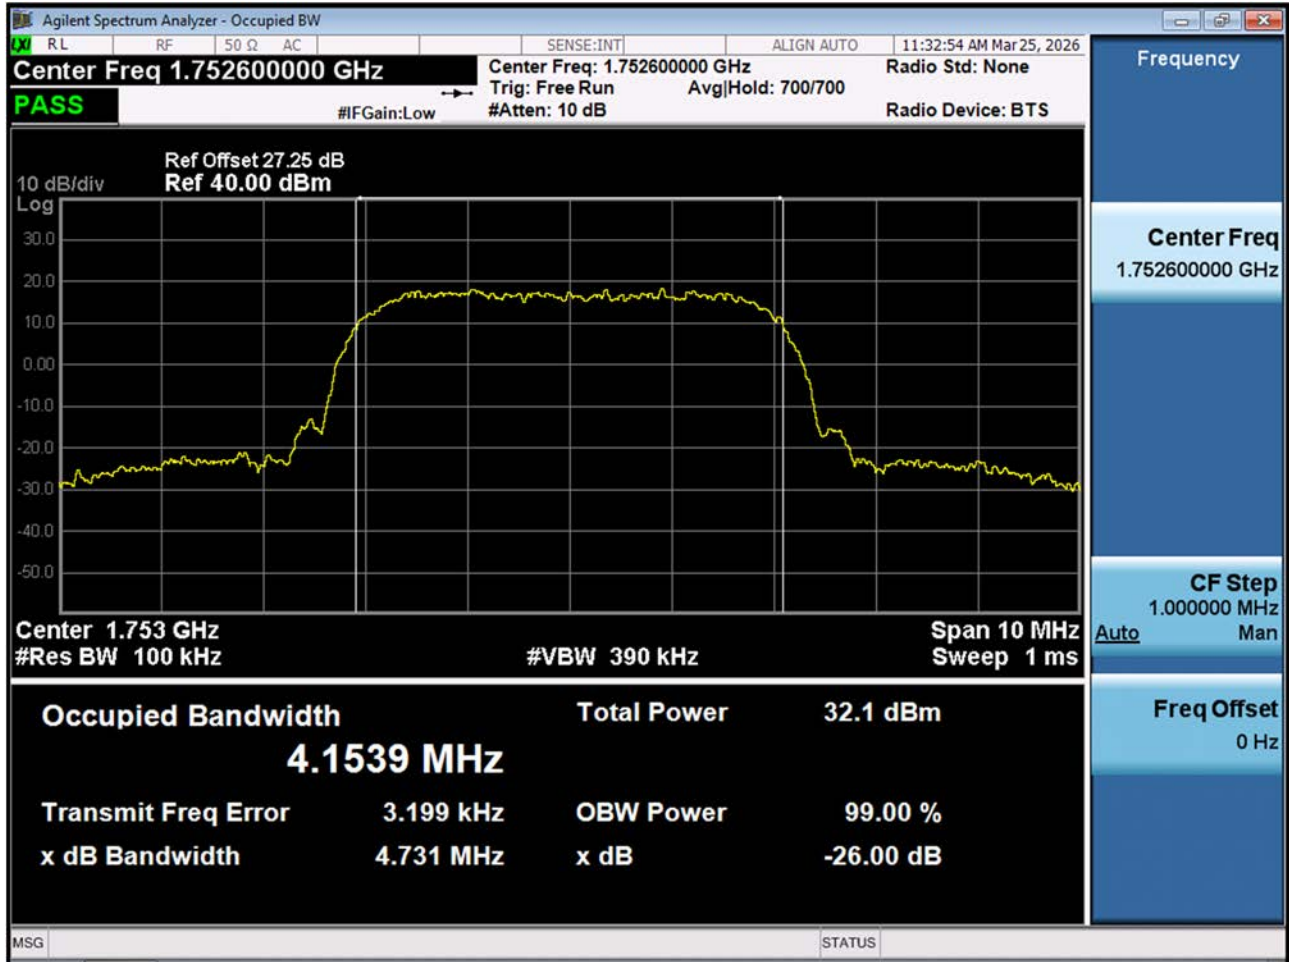


9.2 PEAK-TO-AVERAGE RATIO


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Pk}

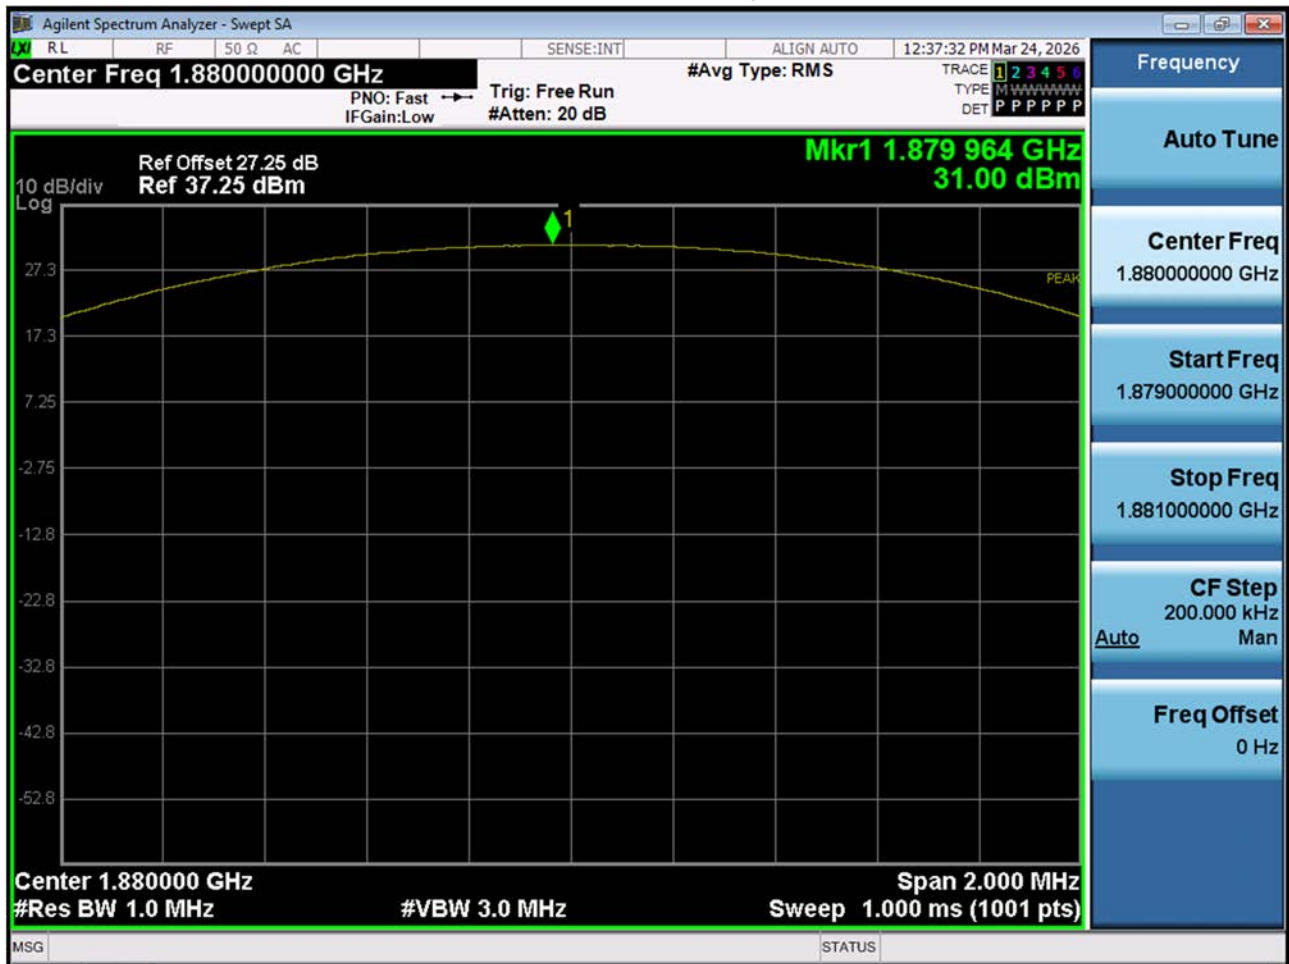


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

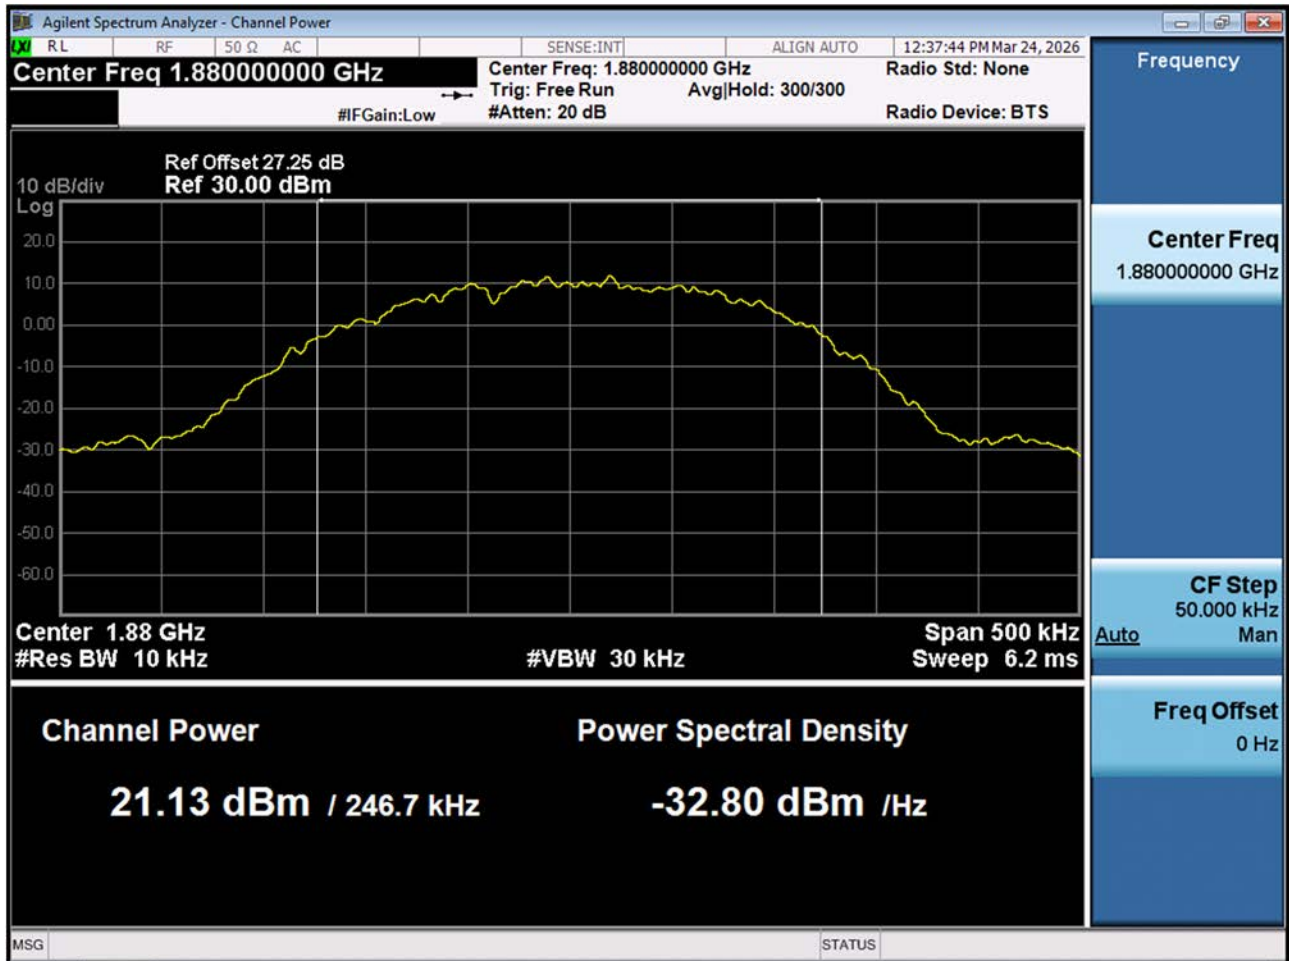


GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

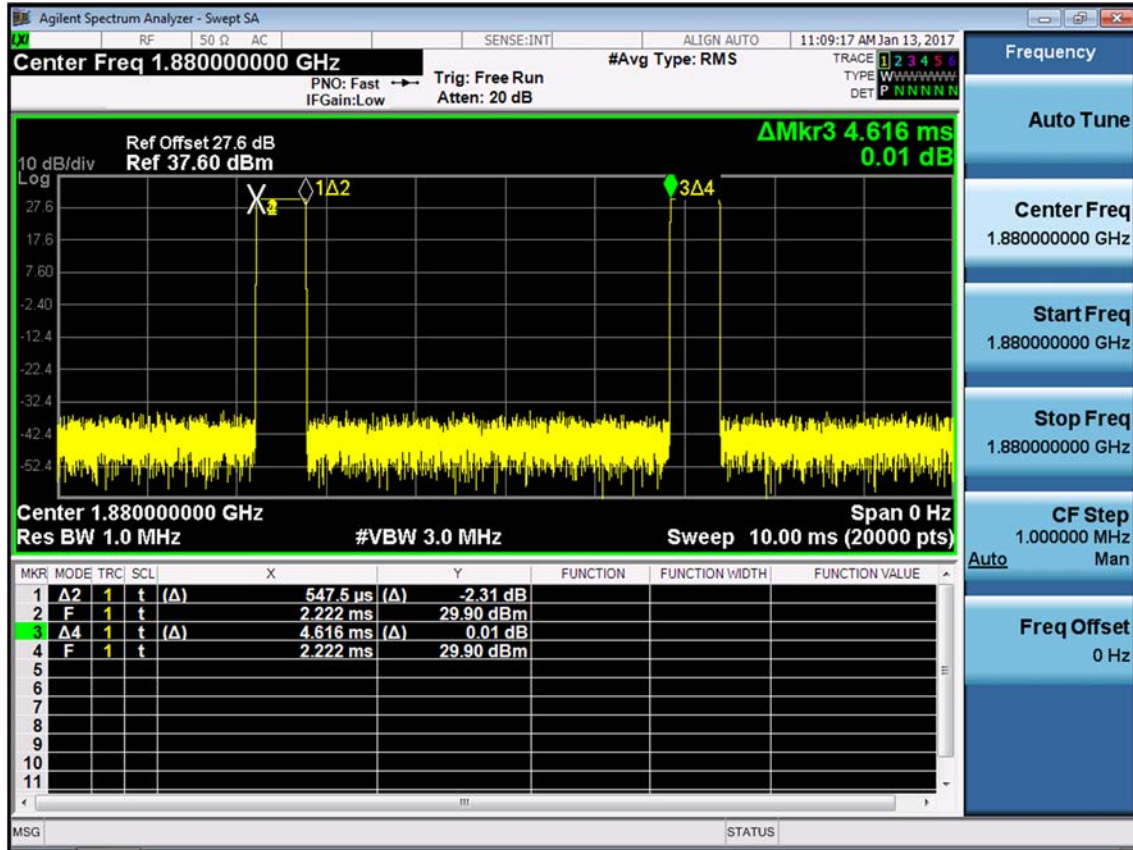


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

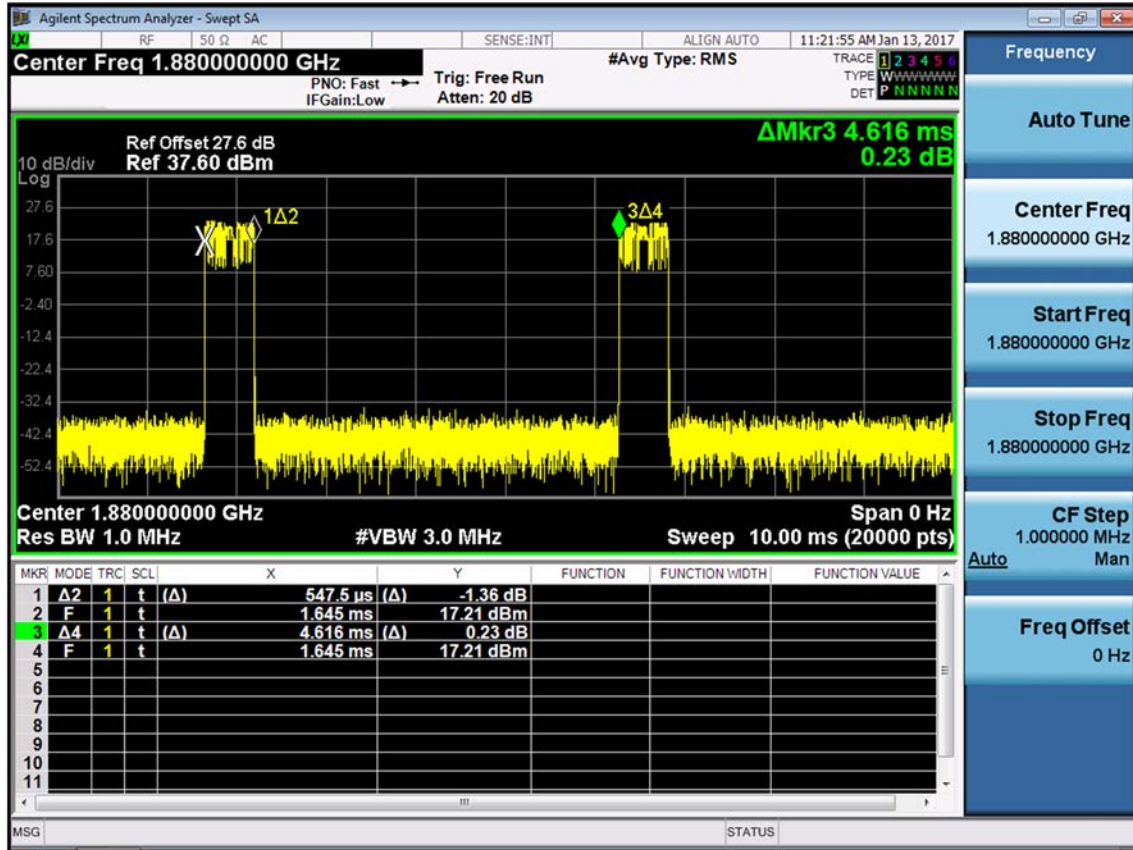


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{pk}

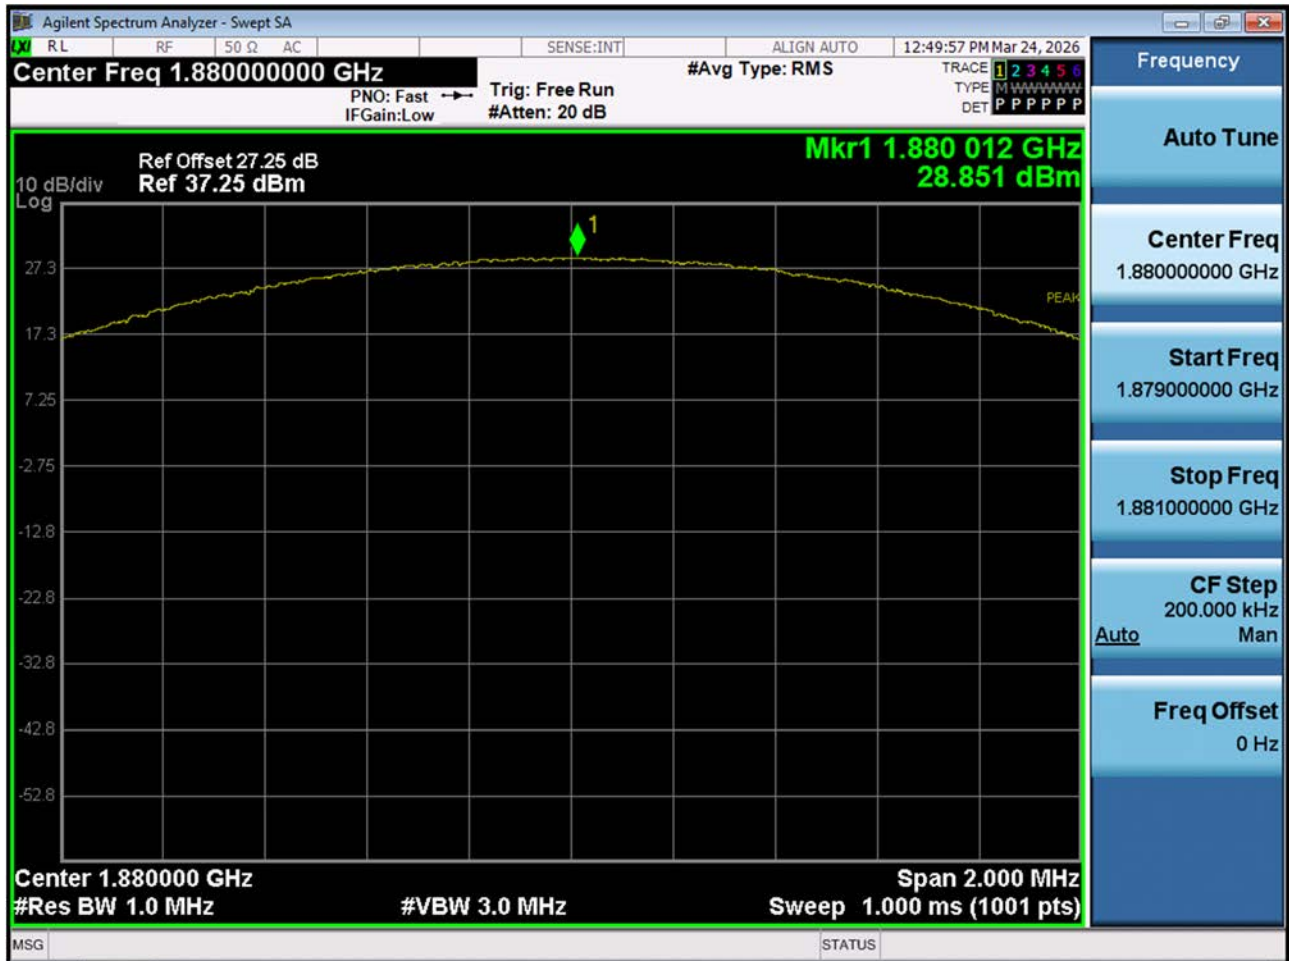


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

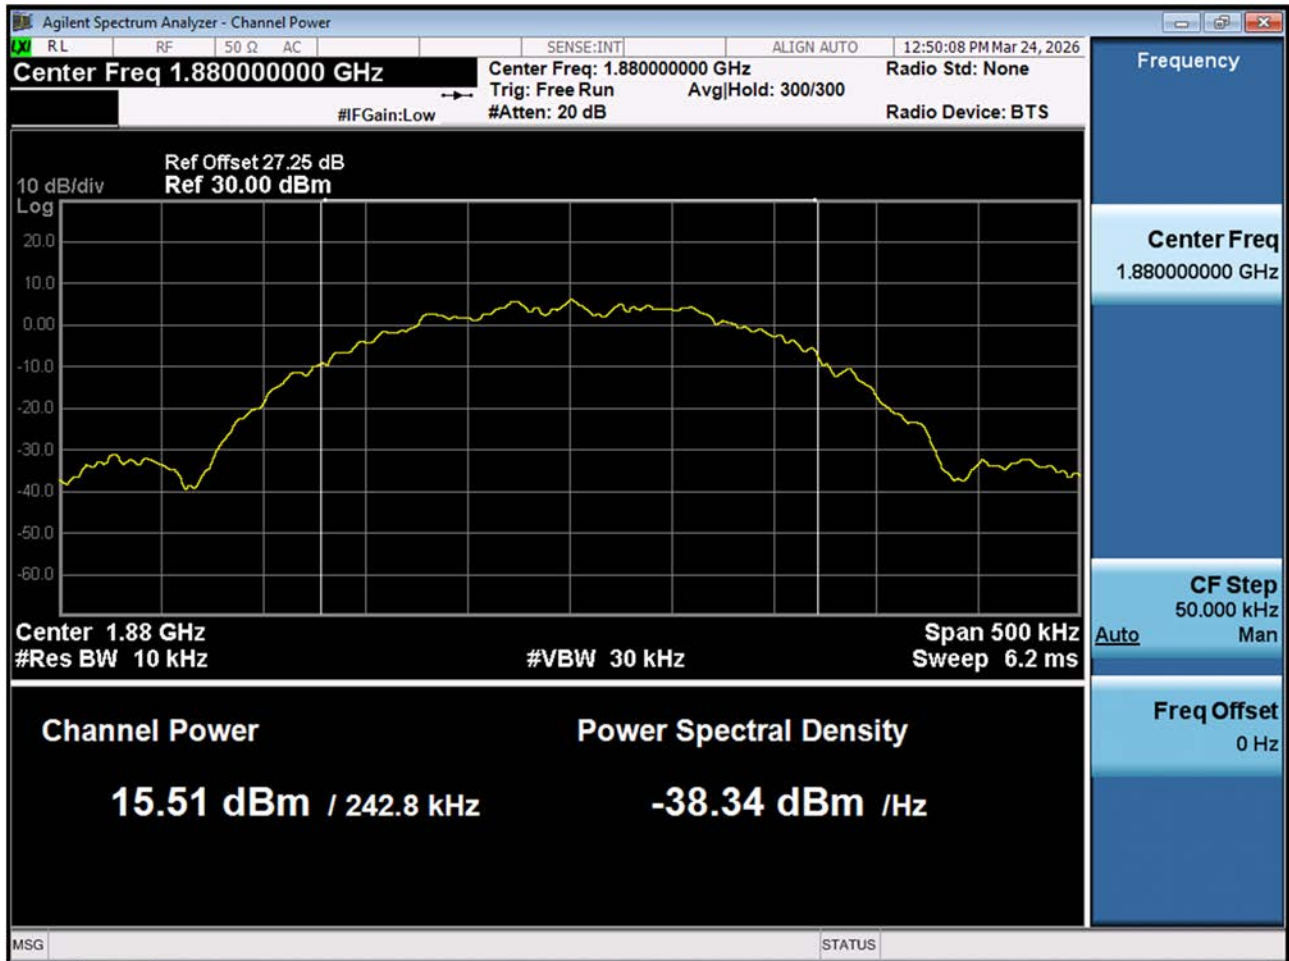


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

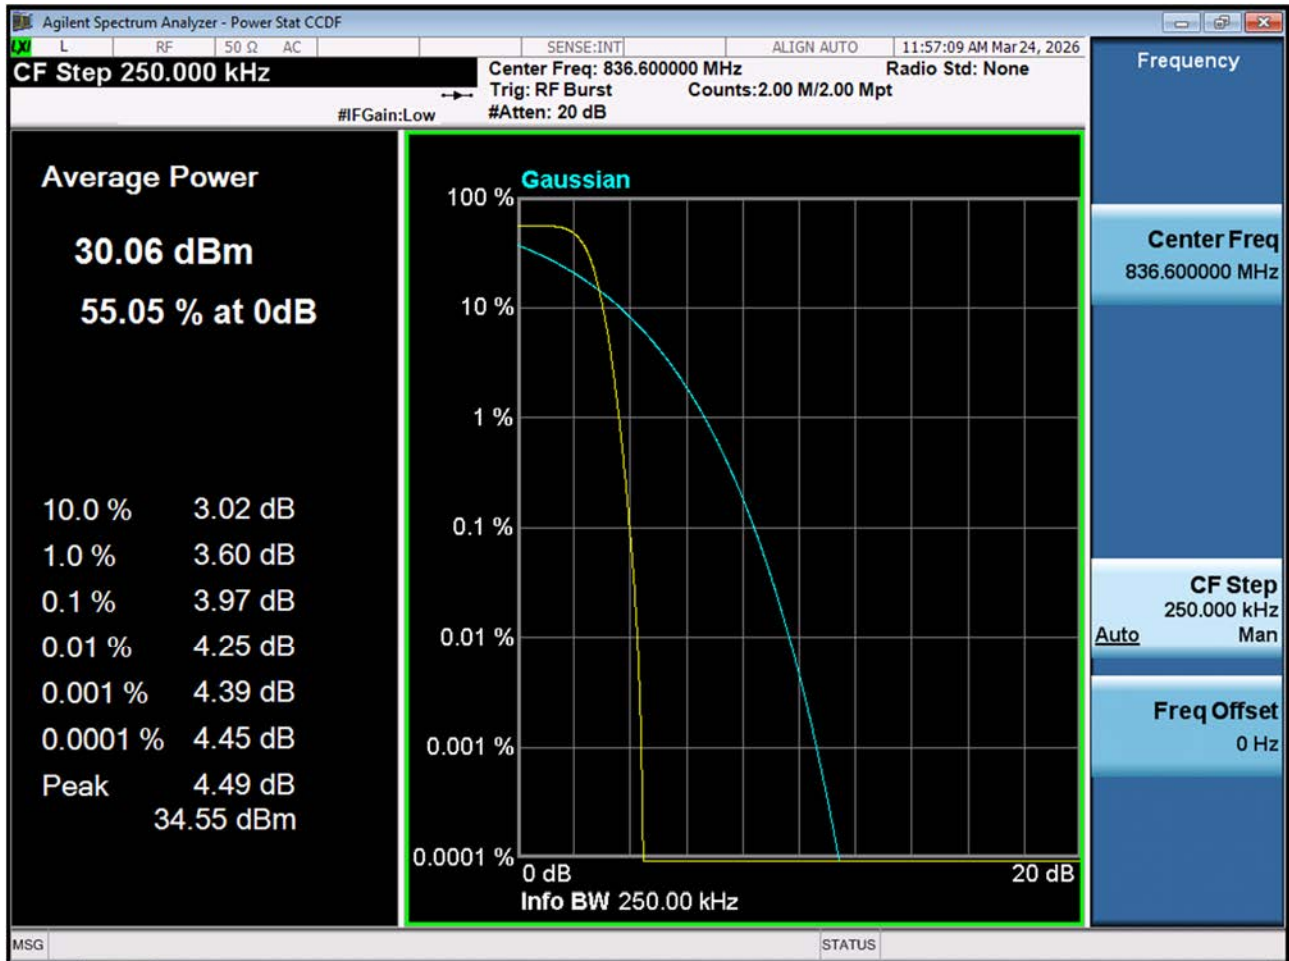


■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

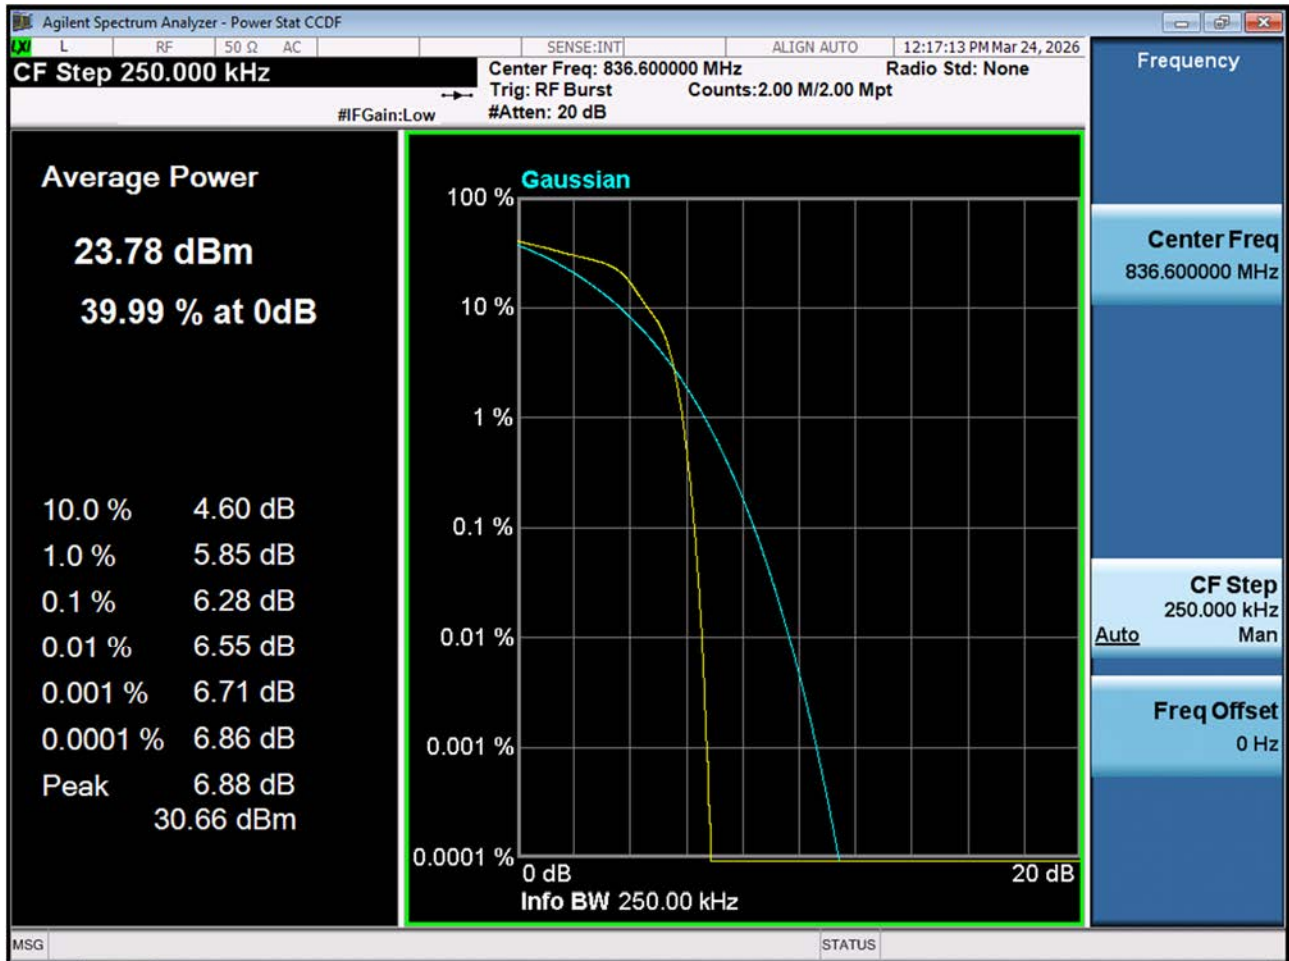


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

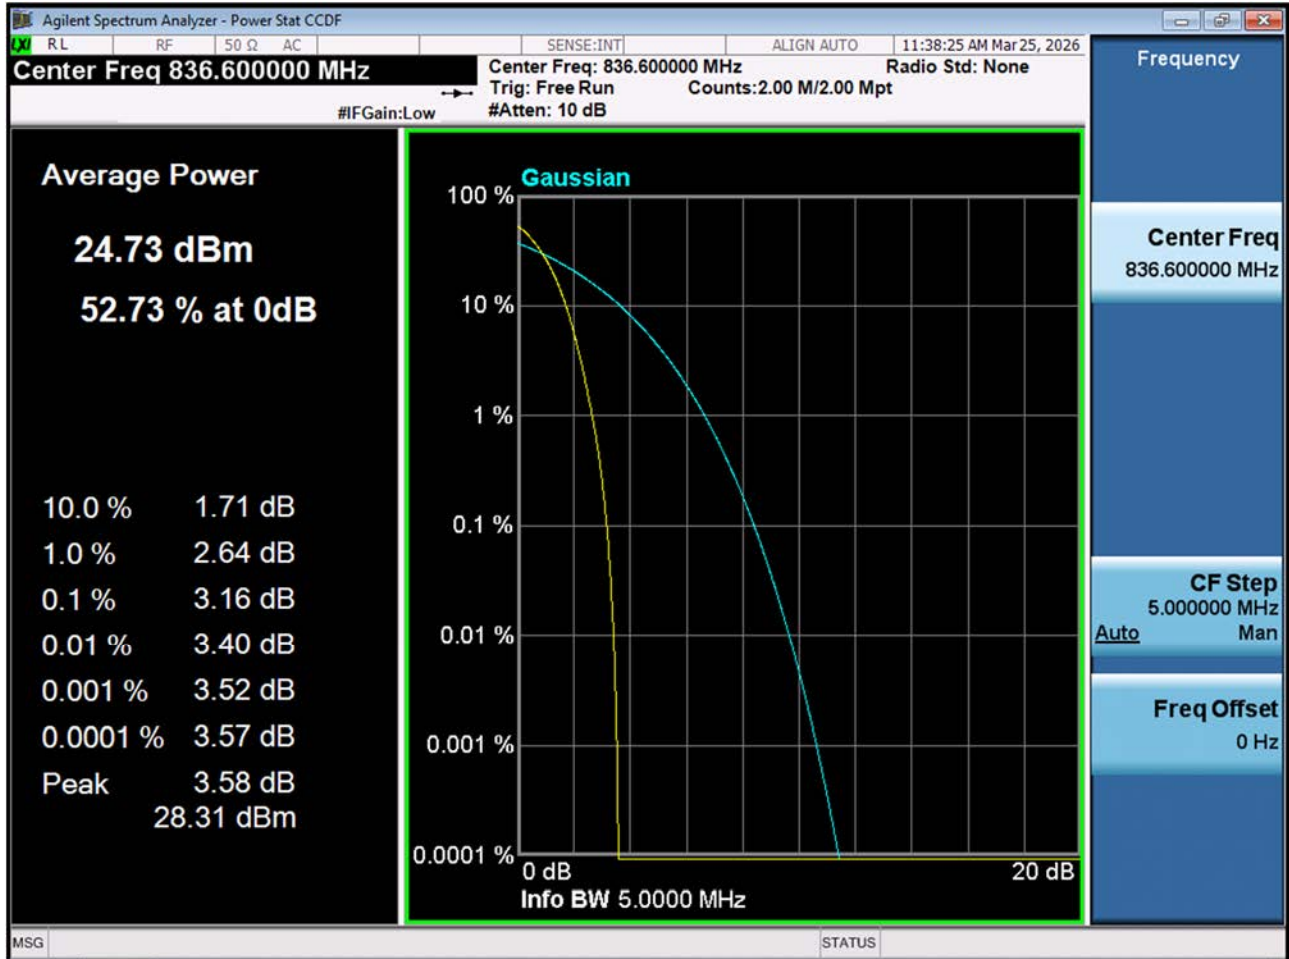

■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

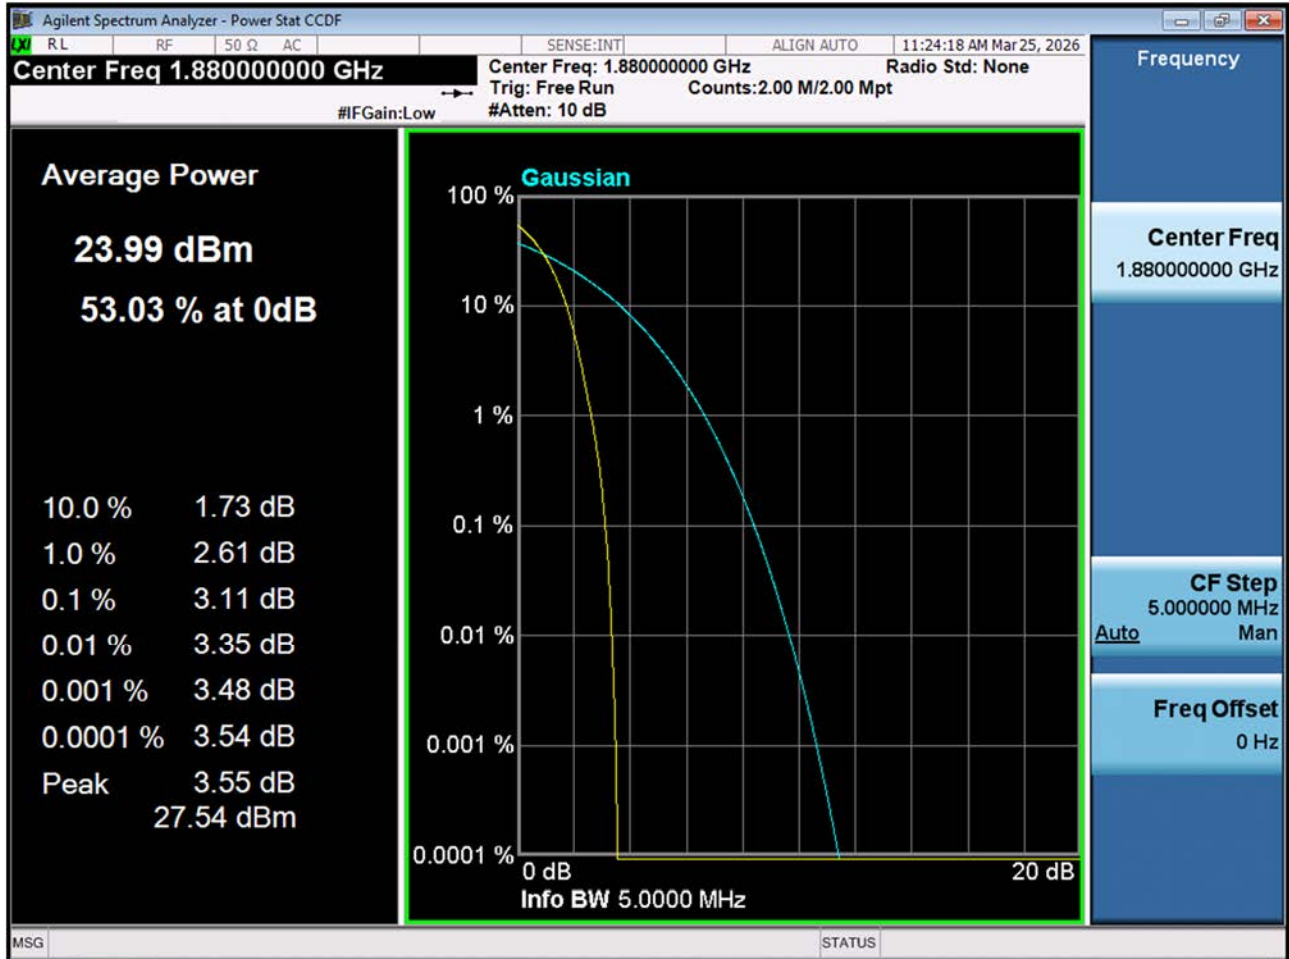


■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

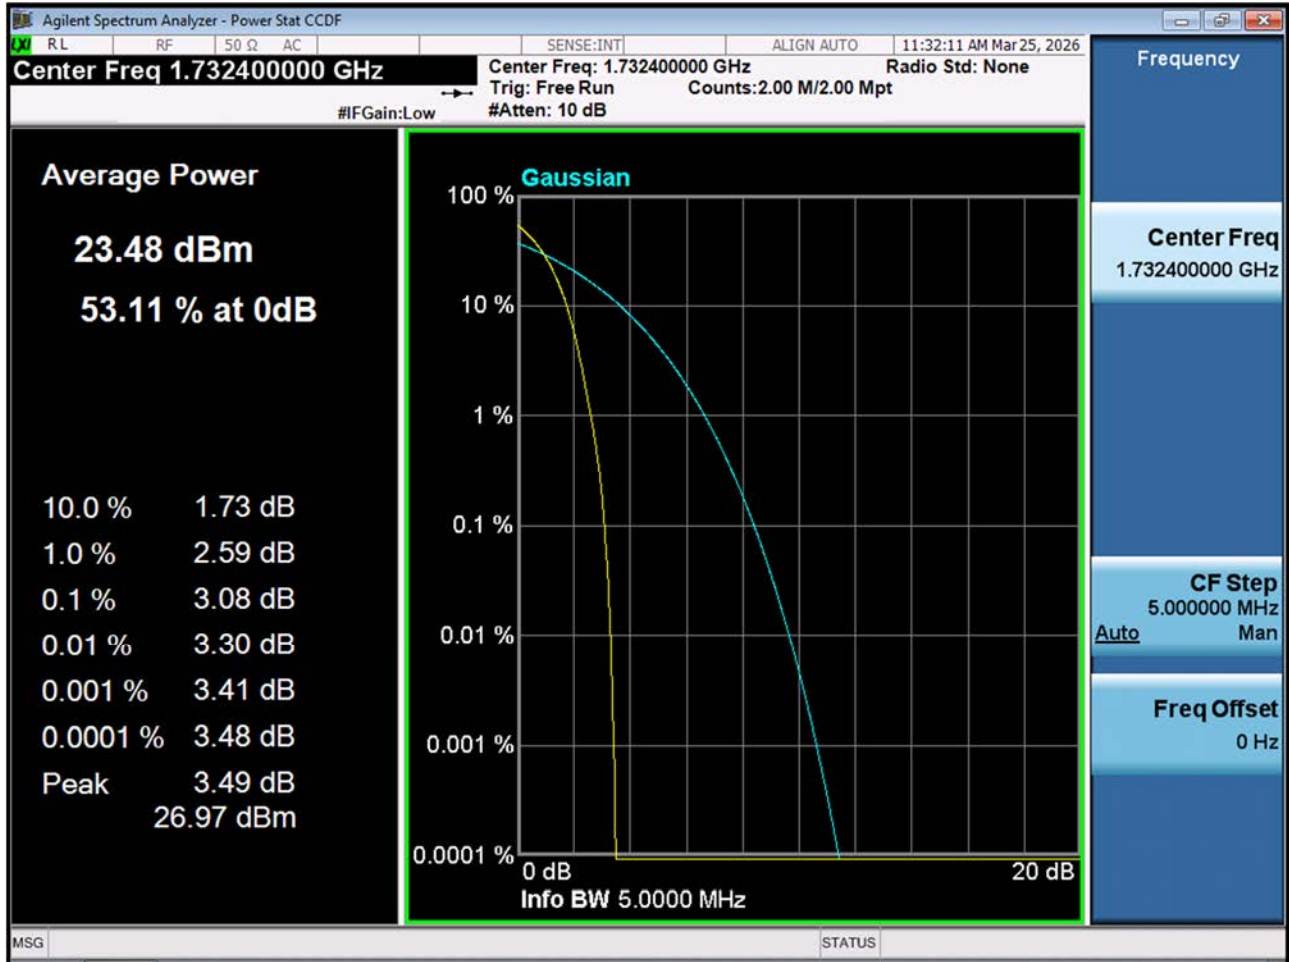

9.3 BAND EDGE


■ GSM850 MODE (128 CH.) Band Edge 1

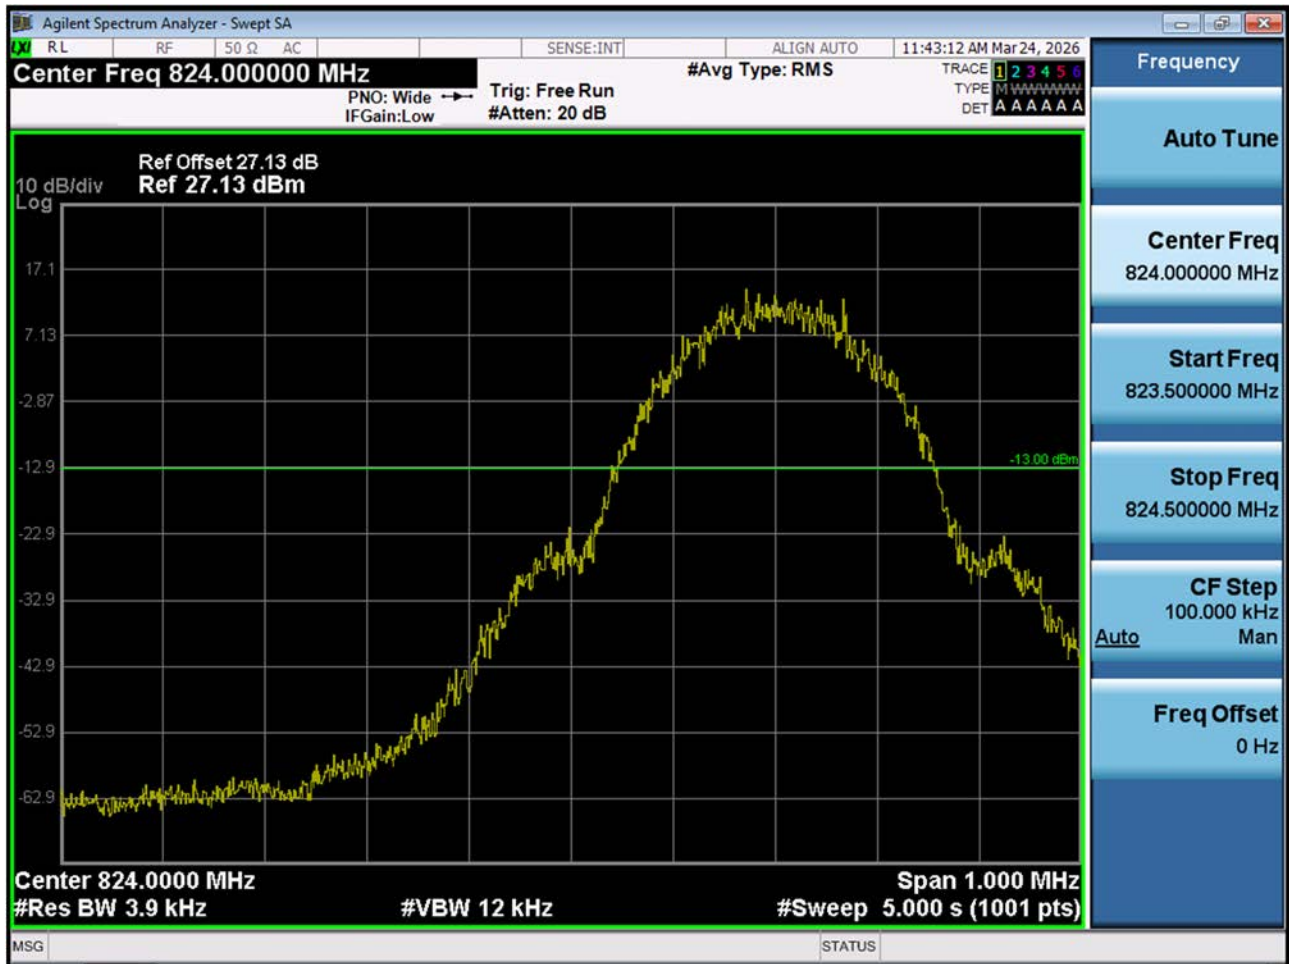


■ GSM850 MODE (128 CH.) Band Edge 2



■ GSM850 MODE (128 CH.) Band Edge 3

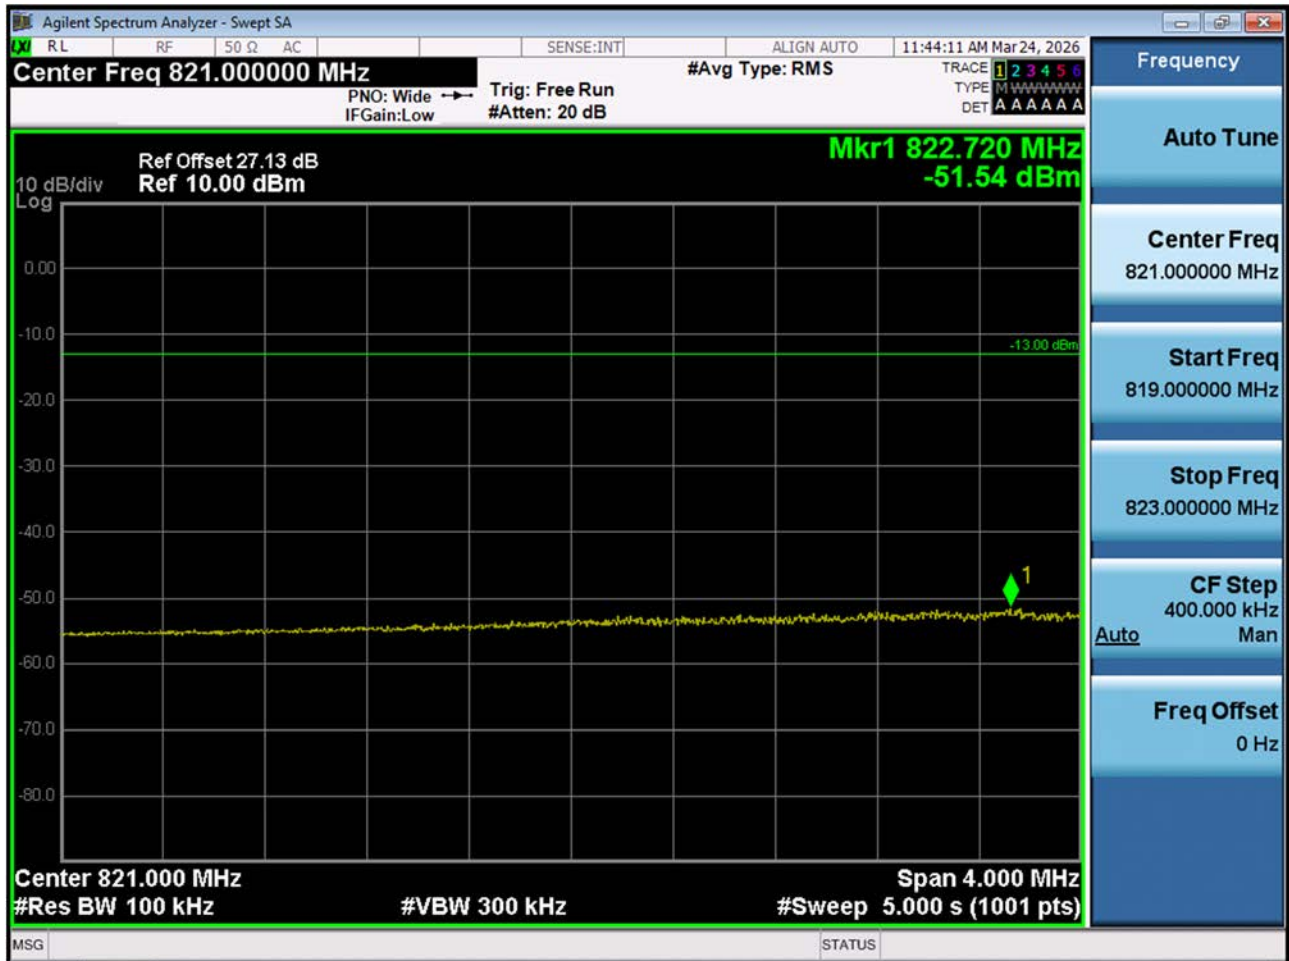

■ GSM850 MODE (251 CH.) Band Edge 1

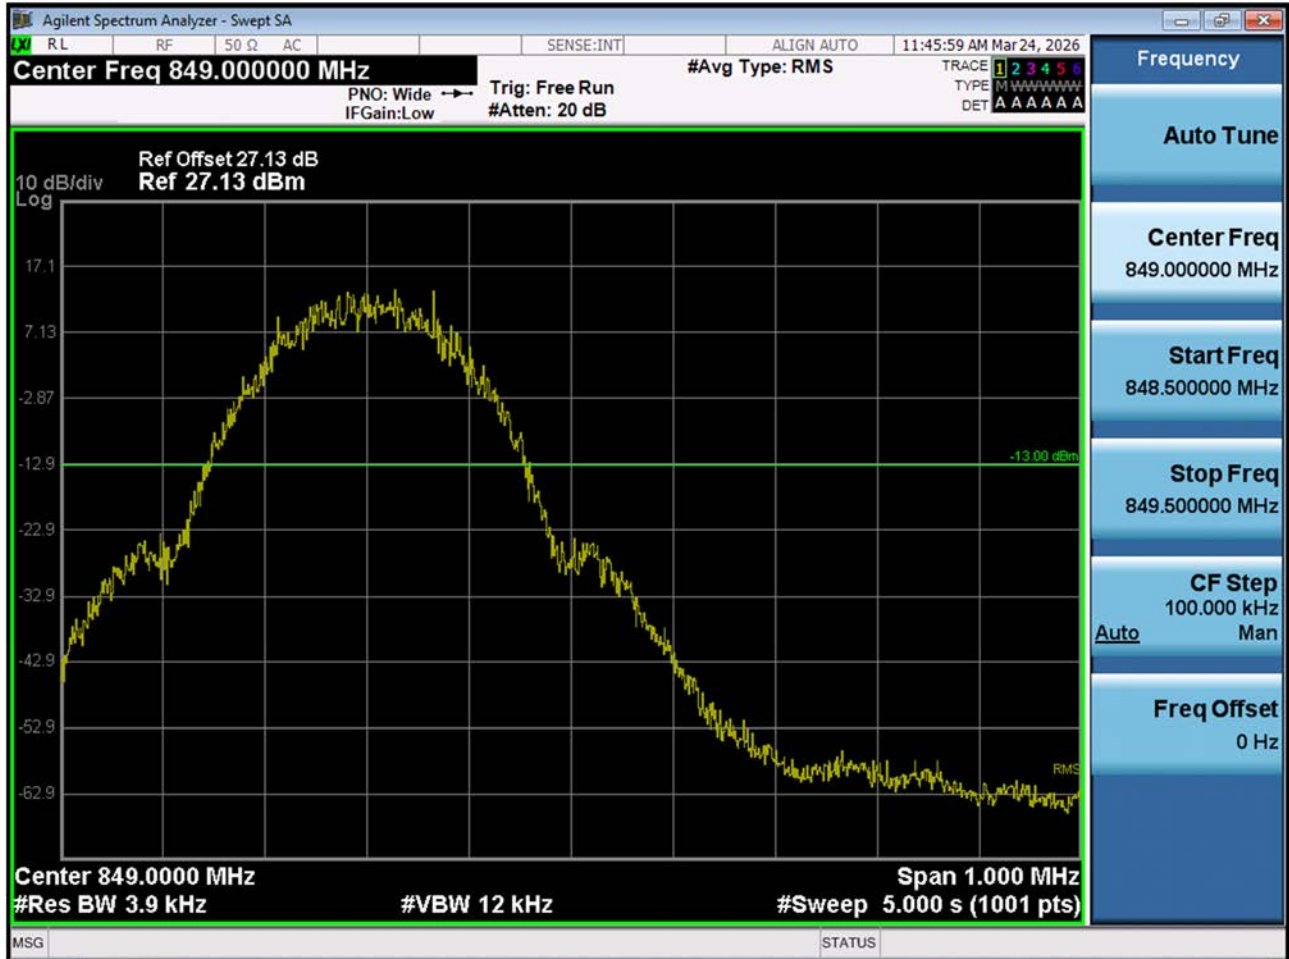


■ GSM850 MODE (251 CH.) Band Edge 2




■ GSM850 MODE (251 CH.) Band Edge 3




■ EDGE MODE (128 CH.) Band Edge 1

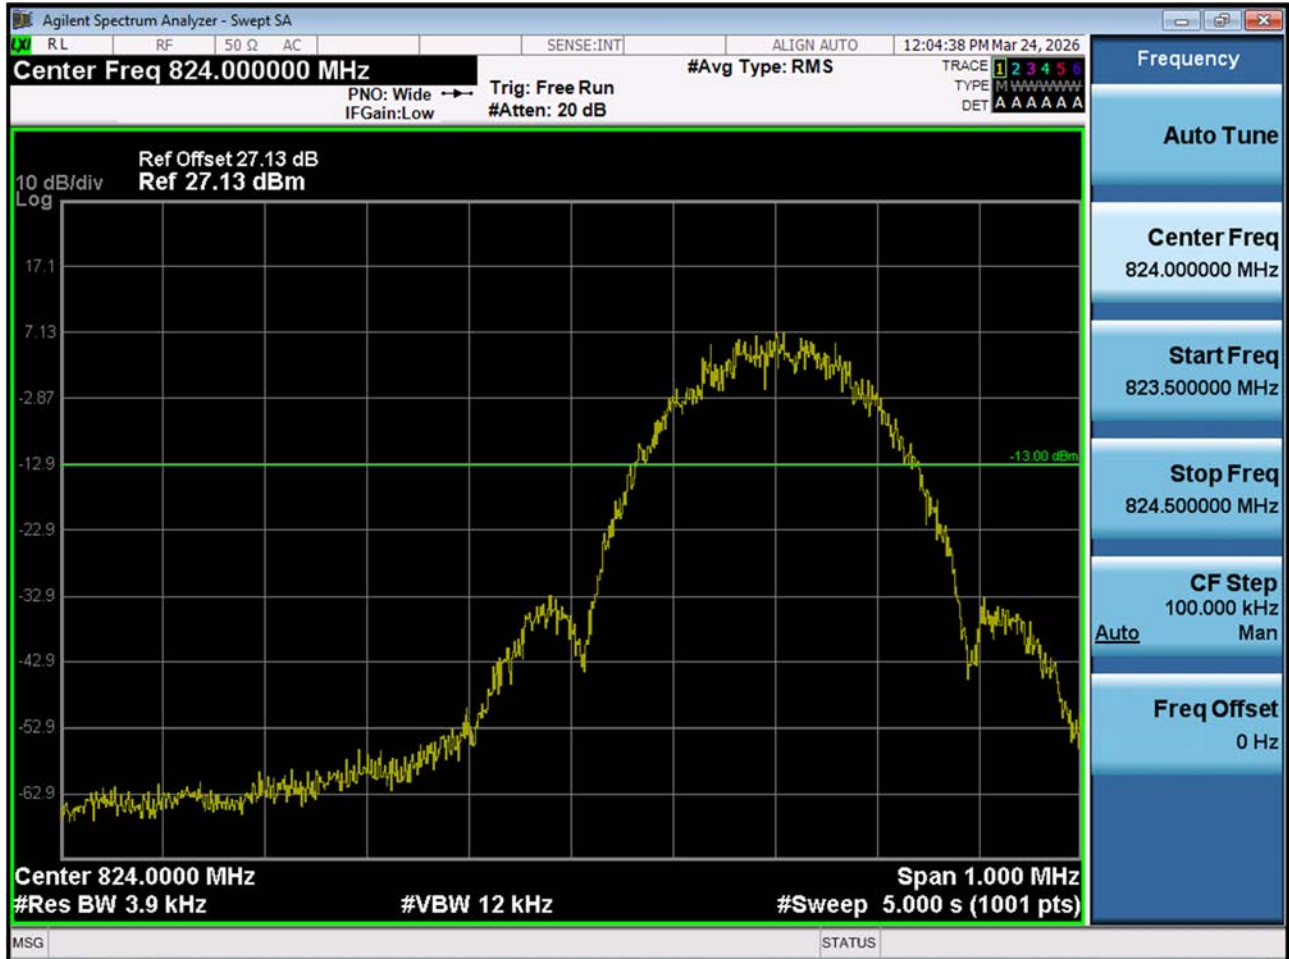


■ EDGE MODE (128 CH.) Band Edge 2

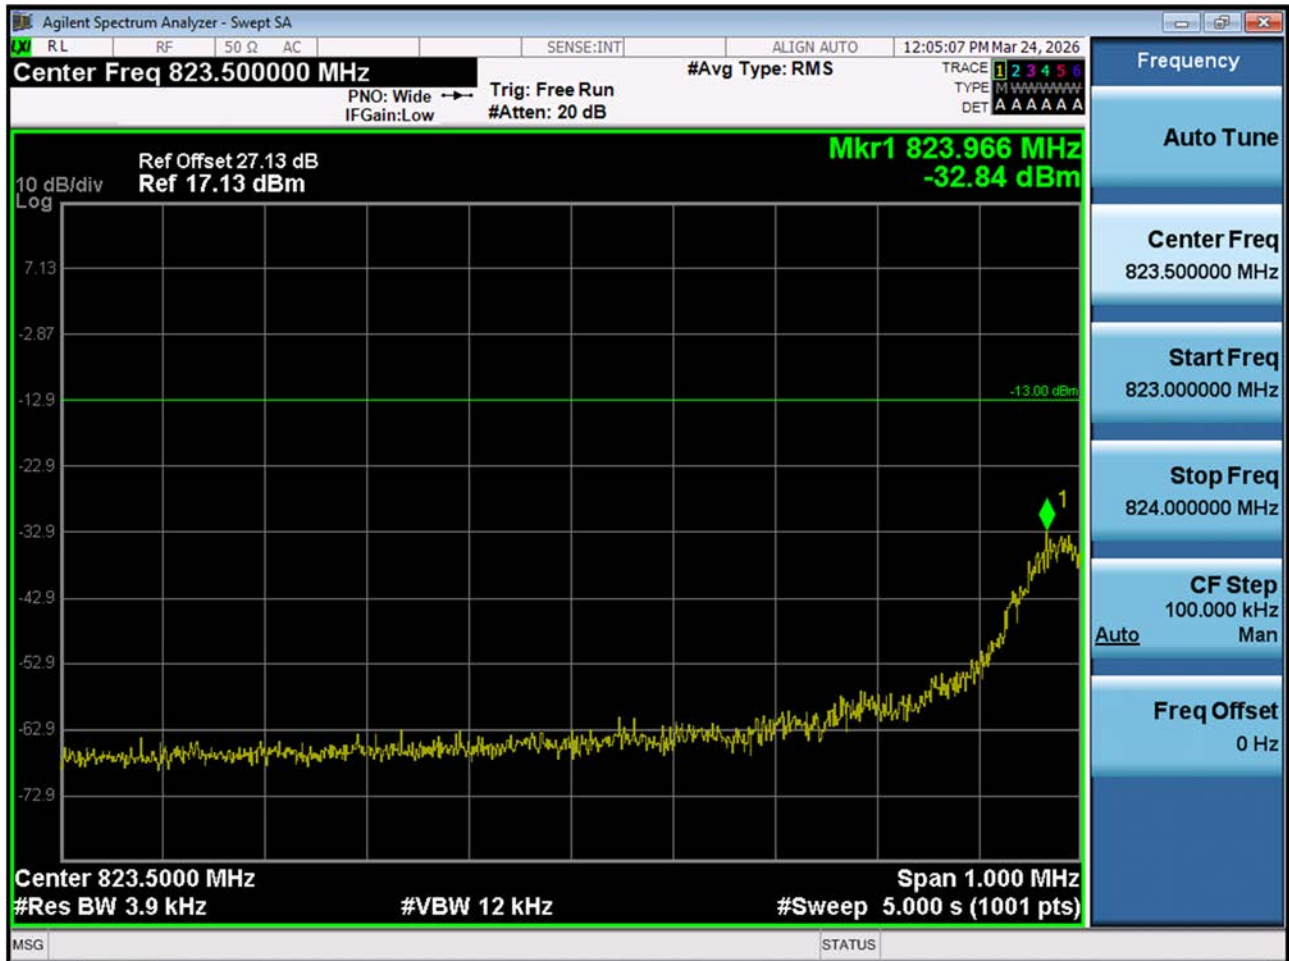

■ EDGE MODE (128 CH.) Band Edge 3

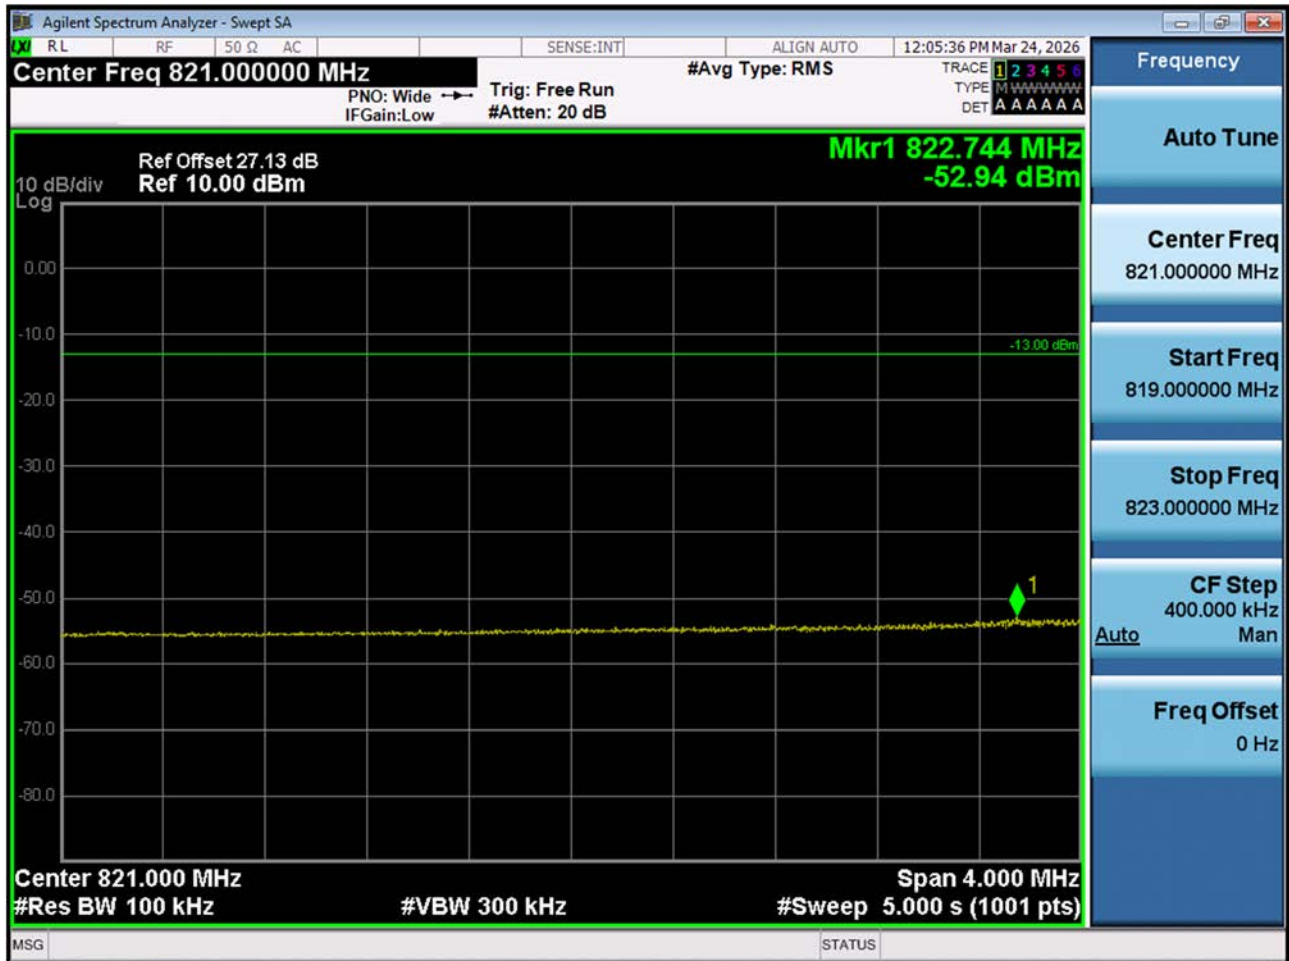

■ EDGE MODE (251 CH.) Band Edge 1

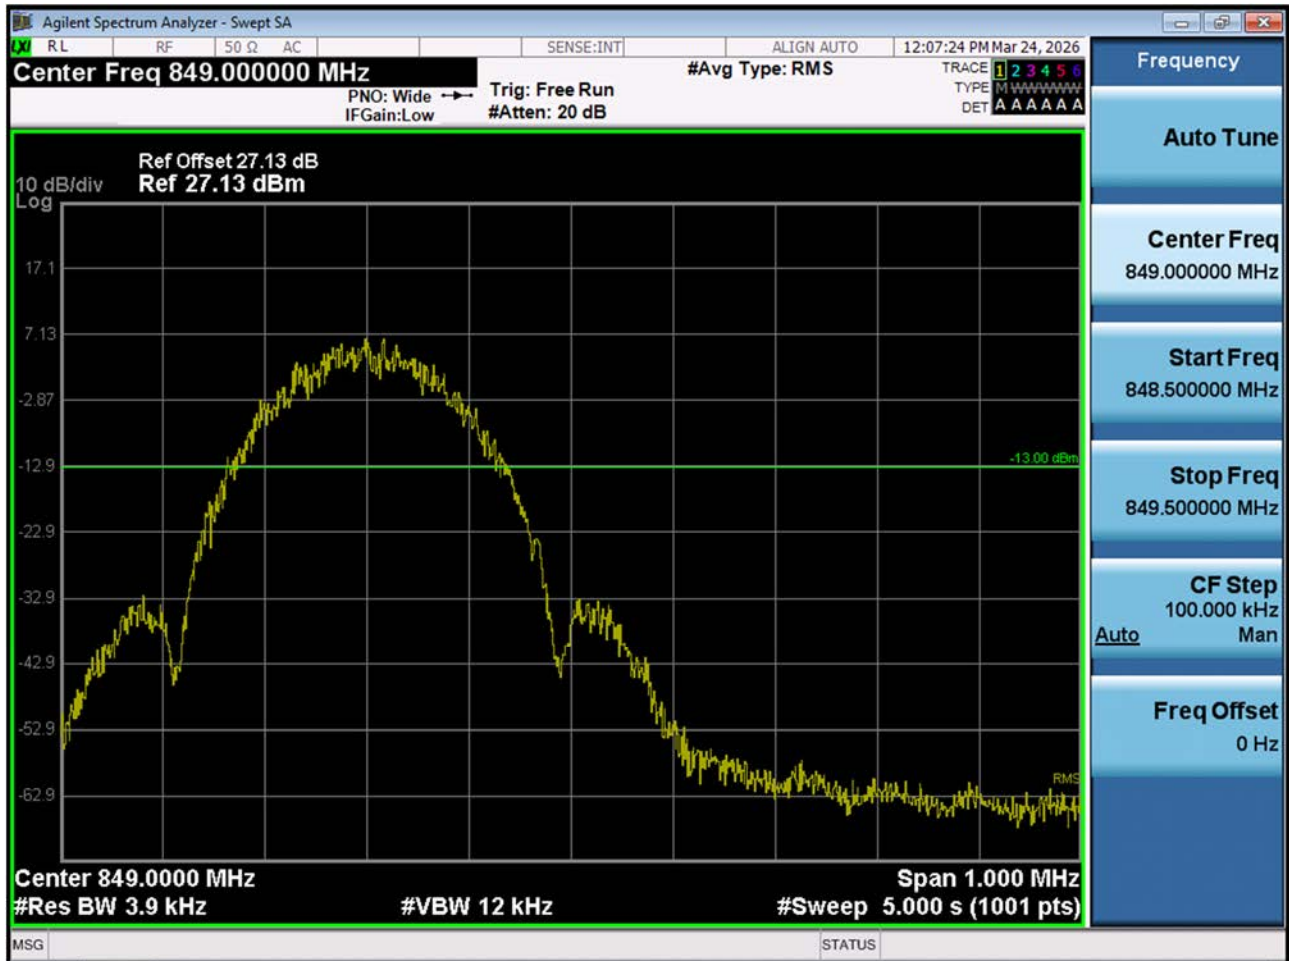


EDGE MODE (251 CH.) Band Edge 2



■ EDGE MODE (251 CH.) Band Edge 3




■ GSM1900 MODE (512 CH.) Band Edge 1

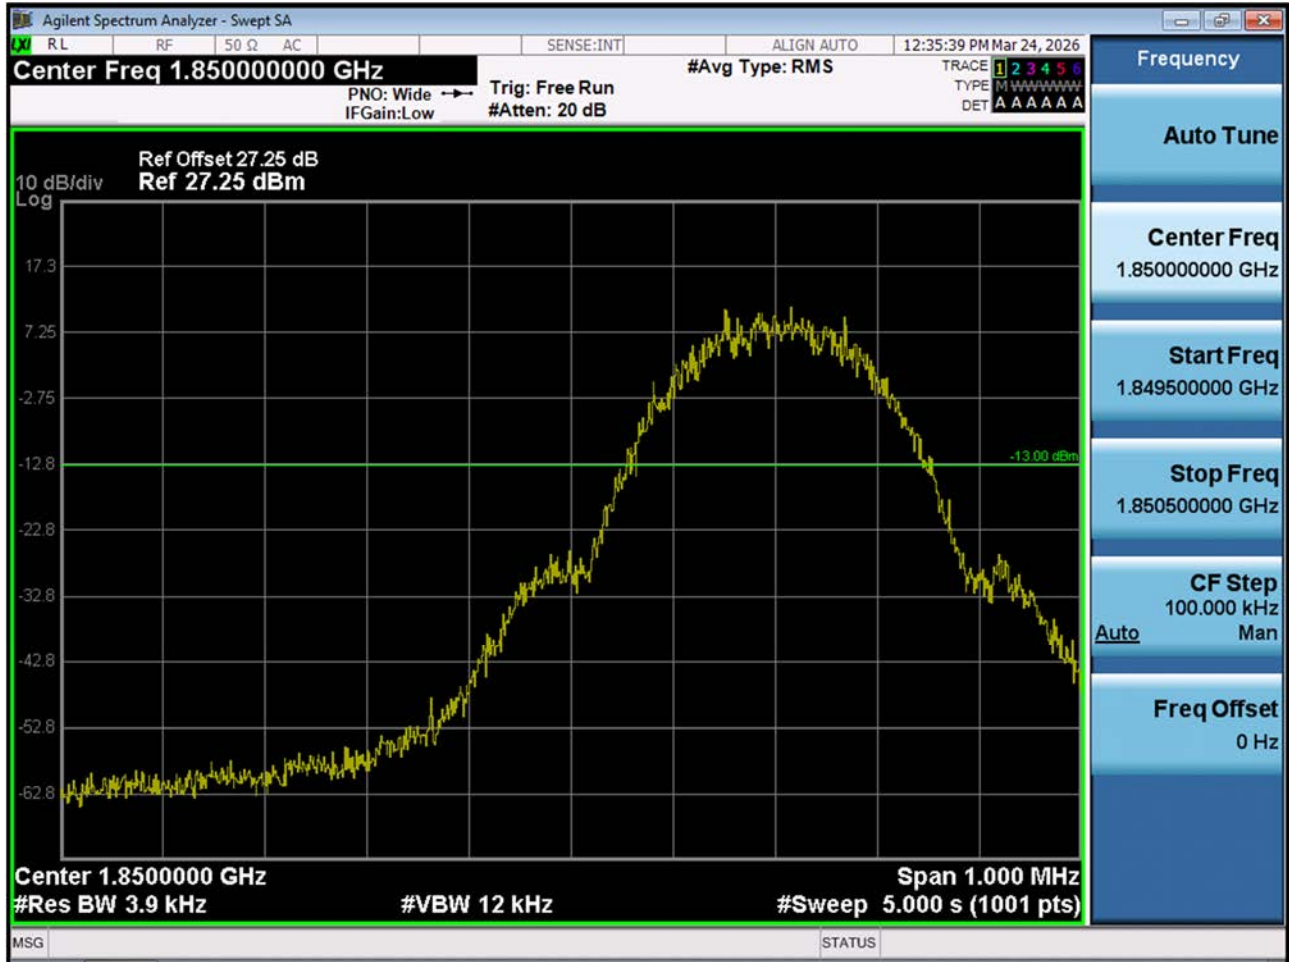

■ GSM1900 MODE (512 CH.) Band Edge 2




■ GSM1900 MODE (512 CH.) Band Edge 3

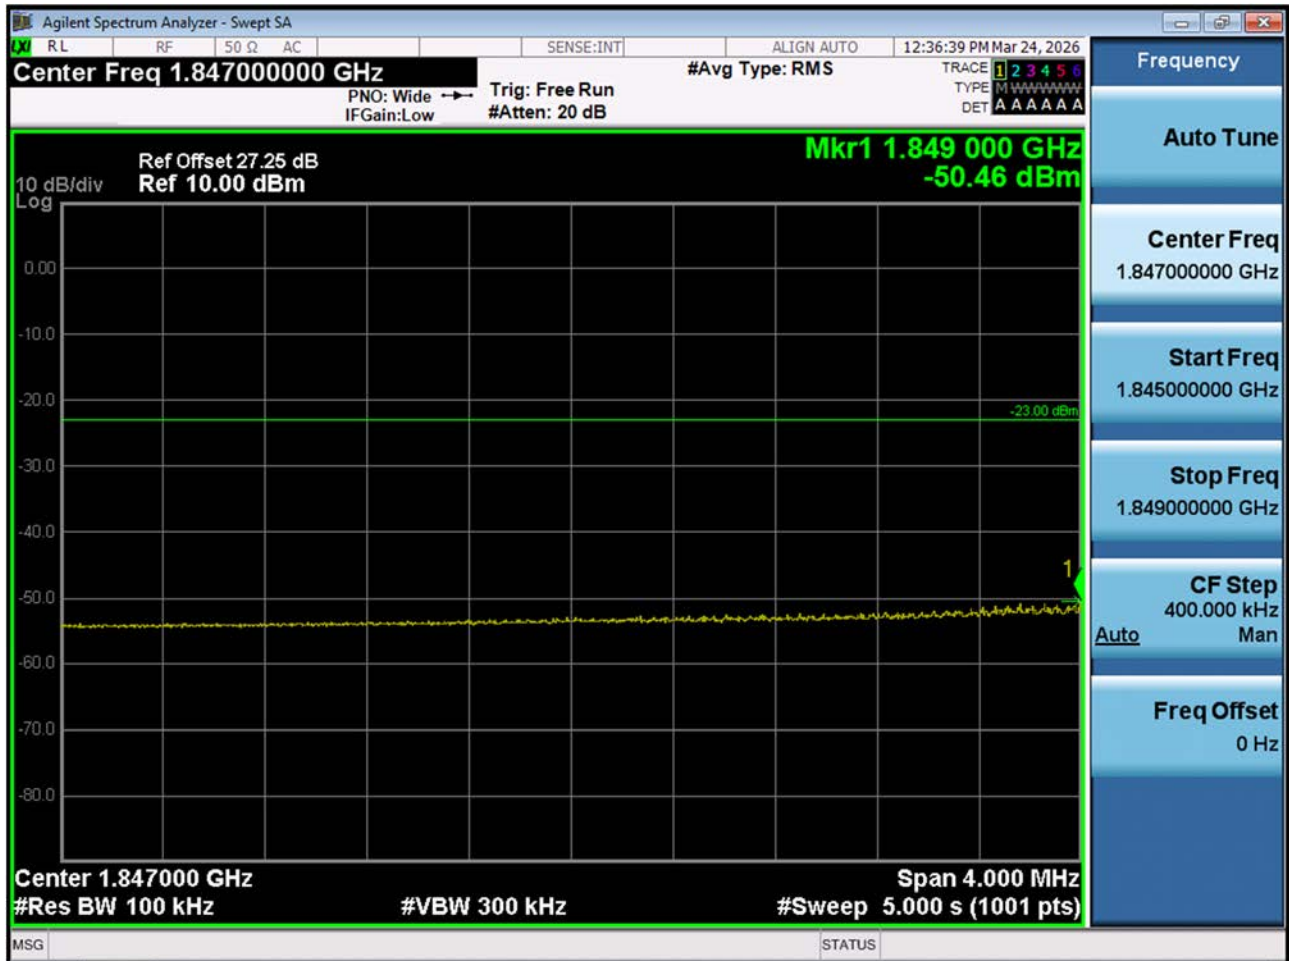

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.46 dBm + 10 dB = -40.46 dBm

■ GSM1900 MODE (810 CH.) Band Edge 1

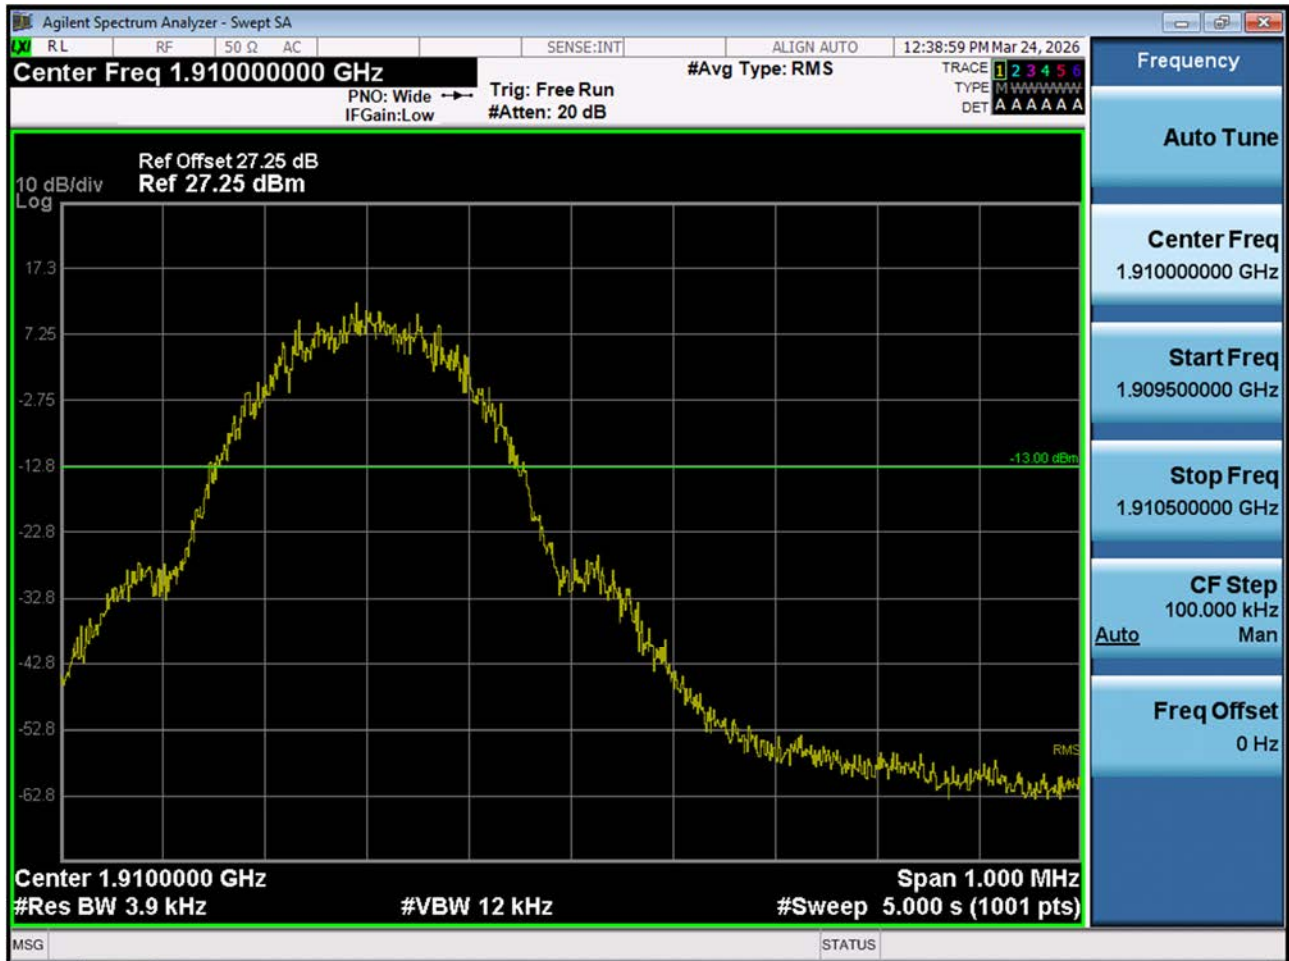

■ GSM1900 MODE (810 CH.) Band Edge 2




■ GSM1900 MODE (810 CH.) Band Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.39 dBm + 10 dB = -40.39 dBm


■ EDGE MODE (512 CH.) Band Edge 1

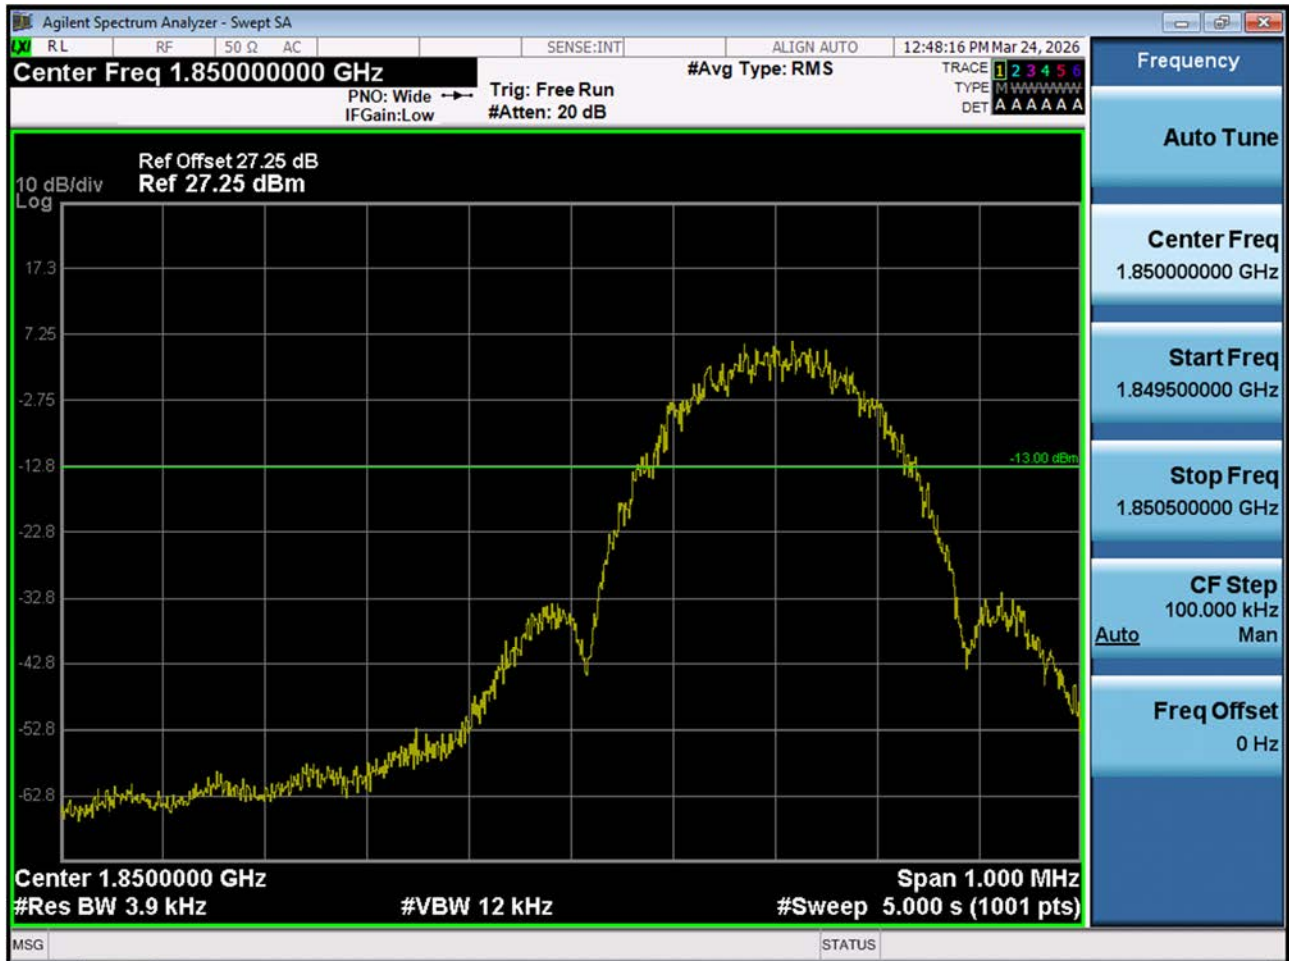

■ EDGE MODE (512 CH.) Band Edge 2




■ EDGE MODE (512 CH.) Band Edge 3

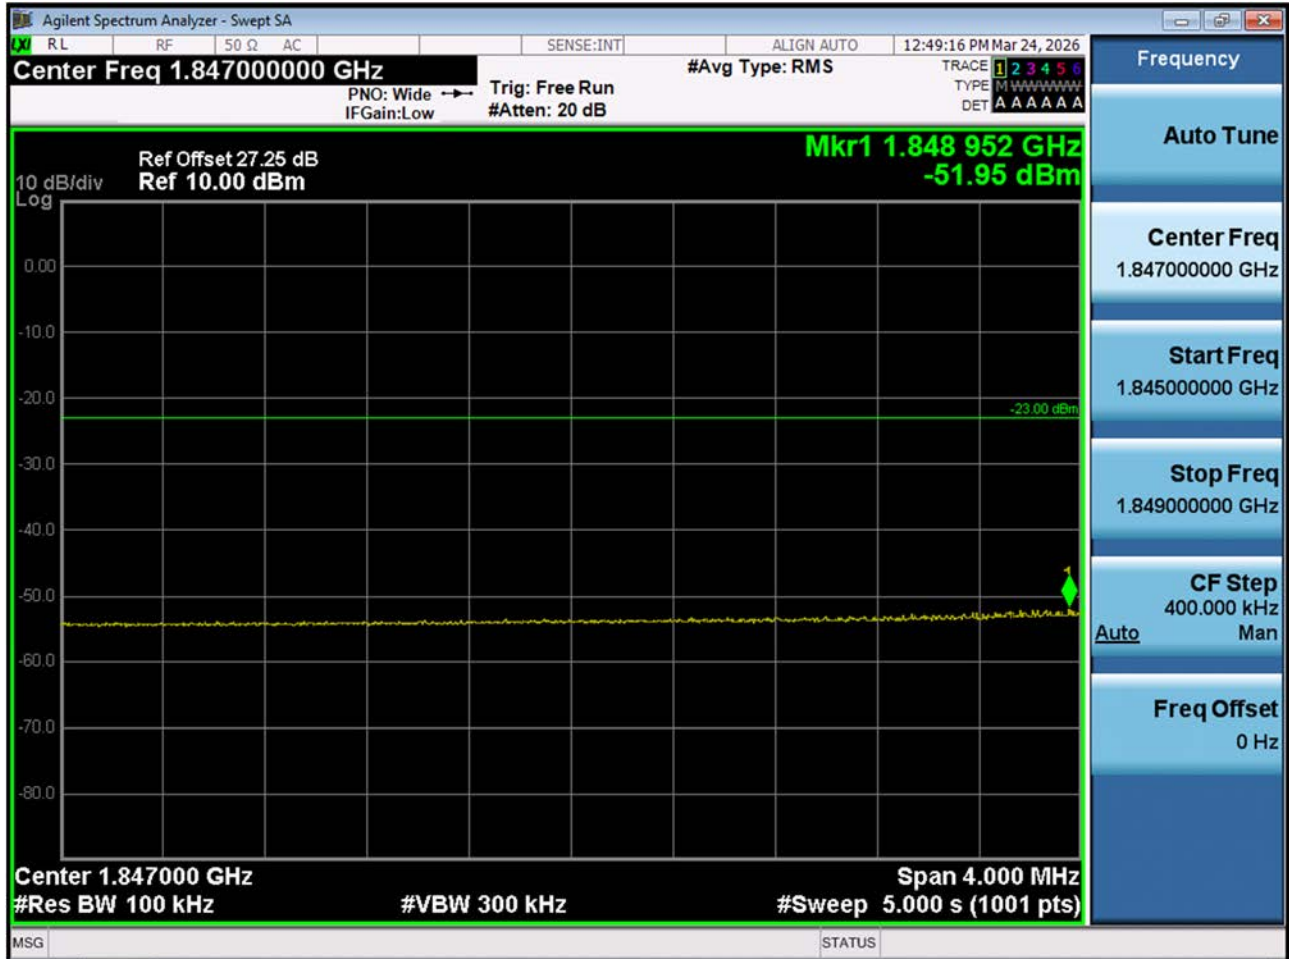

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -51.95 dBm + 10 dB = -41.95 dBm

■ EDGE MODE (810 CH.) Band Edge 1

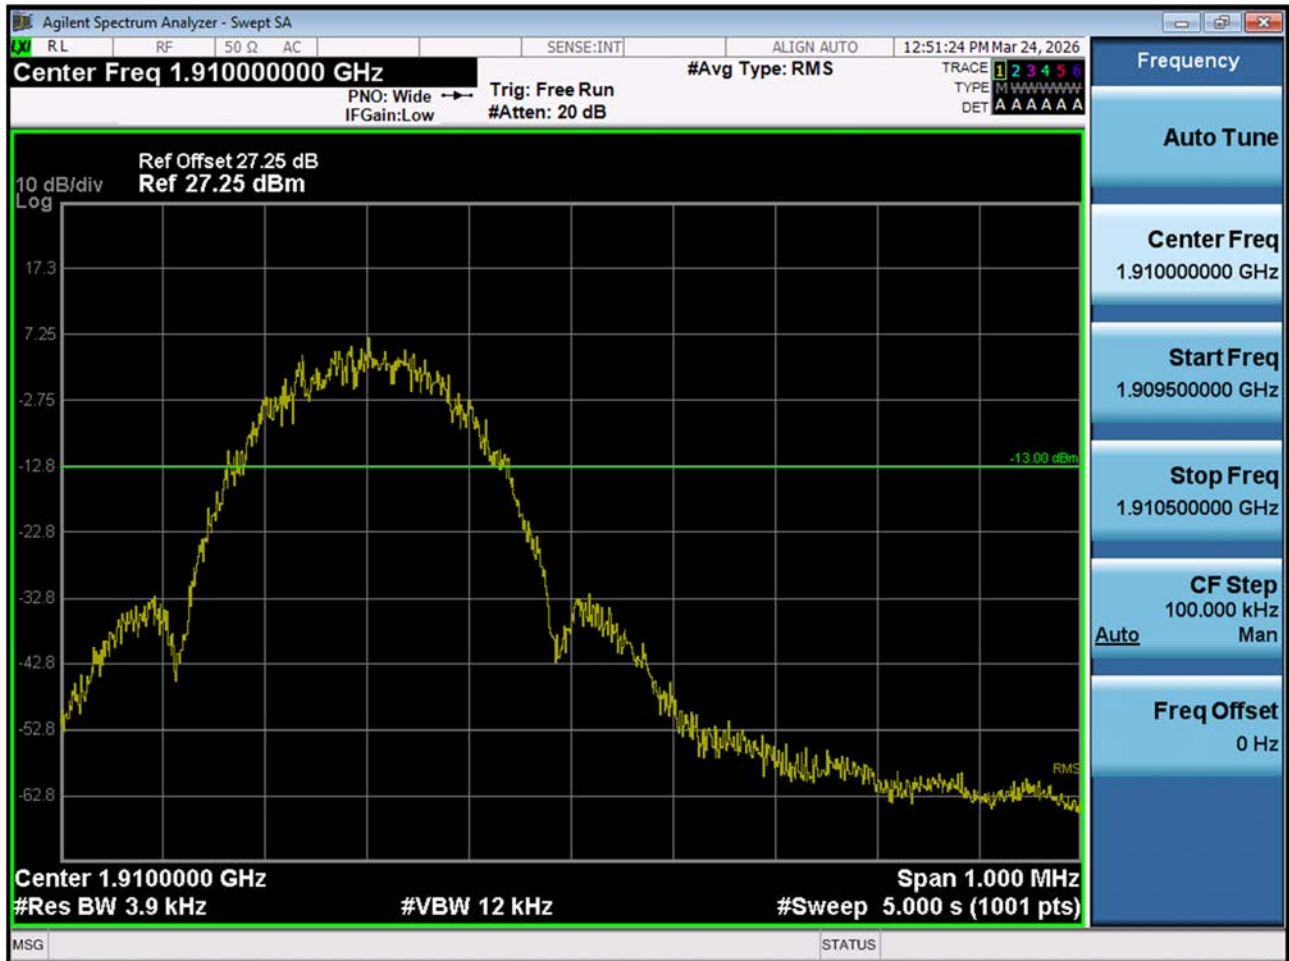

■ EDGE MODE (810 CH.) Band Edge 2



■ EDGE MODE (810 CH.) Band Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -51.77 dBm + 10 dB = -41.77 dBm

■ WCDMA850 MODE (4132 CH.) Band Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Band Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Band Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Band Edge

