

TEST REPORT

FCC LTE B41 Test for SM-A276B/DS
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2604-FC047

DATE OF ISSUE
April 27, 2026

Tested by
Jae Ryang Do



Technical Manager
Kwon Jeong



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2604-FC047

DATE OF ISSUE

April 27, 2026

Additional Model

SM-A276B

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-A276B/DS

Date of Test

March 18, 2026 ~ April 24, 2026

FCC ID

A3LSMA276B

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 27, 2026	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
2.4. EQUIPMENT	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO	11
3.5 OCCUPIED BANDWIDTH	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 CHANNEL EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA(Main 1 ANT)	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	24
8.2 RADIATED SPURIOUS EMISSIONS	26
8.3 PEAK-TO-AVERAGE RATIO	30
8.4 OCCUPIED BANDWIDTH	31
8.5 CONDUCTED SPURIOUS EMISSIONS	32
8.6 CHANNEL EDGE	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
9. TEST DATA(Main 3 ANT)	46
9.1 EQUIVALENT ISOTROPIC RADIATED POWER	46
8.2 RADIATED SPURIOUS EMISSIONS	48
8.3 PEAK-TO-AVERAGE RATIO	52
8.4 OCCUPIED BANDWIDTH	53
8.5 CONDUCTED SPURIOUS EMISSIONS	54
8.6 CHANNEL EDGE	55
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	56
10. TEST PLOTS(Main 1 ANT)	68
10.1 PEAK-TO-AVERAGE RATIO	69
10.2 OCCUPIED BANDWIDTH	85
10.3 CONDUCTED SPURIOUS EMISSIONS	101
10.4 CHANNEL EDGE	125
11. TEST PLOTS(Main 3 ANT)	153
11.1 PEAK-TO-AVERAGE RATIO	154
11.2 OCCUPIED BANDWIDTH	170
11.3 CONDUCTED SPURIOUS EMISSIONS	186
11.4 CHANNEL EDGE	210
12. ANNEX A_ TEST SETUP PHOTO	238

MEASUREMENT REPORT

1. GENERAL INFORMATION

Model(s):	SM-A276B/DS
Additional Model(s)	SM-A276B
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
Serial number:	Radiated : R3GL30N613N Conducted : R37L300SGRV
Antenna Information	Please refer to the Antenna Specification document.

1.1. MAXIMUM OUTPUT POWER

Main 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41 (5)	2498.5 – 2687.5	4M52G7D	QPSK	0.227	23.56
		4M49W7D	16QAM	0.188	22.74
		4M53W7D	64QAM	0.139	21.42
		4M51W7D	256QAM	0.074	18.71
LTE – Band 41 (10)	2501.0 – 2685.0	8M99G7D	QPSK	0.214	23.30
		9M02W7D	16QAM	0.181	22.57
		8M98W7D	64QAM	0.146	21.63
		9M01W7D	256QAM	0.067	18.24
LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.207	23.15
		13M5W7D	16QAM	0.173	22.38
		13M5W7D	64QAM	0.134	21.28
		13M5W7D	256QAM	0.066	18.22
LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.212	23.26
		18M0W7D	16QAM	0.167	22.22
		18M0W7D	64QAM	0.144	21.57
		18M0W7D	256QAM	0.067	18.27

Main 3 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41 (5)	2498.5 – 2687.5	4M51G7D	QPSK	0.231	23.63
		4M53W7D	16QAM	0.192	22.84
		4M52W7D	64QAM	0.125	20.96
		4M52W7D	256QAM	0.062	17.93
LTE – Band 41 (10)	2501.0 – 2685.0	8M98G7D	QPSK	0.209	23.21
		9M01W7D	16QAM	0.179	22.54
		9M00W7D	64QAM	0.139	21.44
		9M00W7D	256QAM	0.074	18.72
LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.225	23.53
		13M5W7D	16QAM	0.162	22.10
		13M5W7D	64QAM	0.133	21.25
		13M5W7D	256QAM	0.065	18.15
LTE – Band 41 (20)	2506.0 – 2680.0	18M0G7D	QPSK	0.210	23.22
		18M0W7D	16QAM	0.166	22.20
		17M9W7D	64QAM	0.144	21.59
		17M9W7D	256QAM	0.068	18.34

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

Please refer to the [2G3G] Test Report.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea.

Detailed description of test facility was submitted to the Commission and accepted dated February 26, 2026 (Registration Number: KR0032).

2.4. EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to ANSI/USEMCSC C63.2-2023, "American National Standard for Specifications of Electromagnetic Interference and Field Strength Measuring Instrumentation in the Frequency Range 9 kHz to 40 GHz".

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq$ 3 x RBW
3. No. of sweep points > 2 x span / RBW
4. Detector = Peak
5. Trace mode = Max Hold
6. The trace was allowed to stabilize
7. Test channel : Low/ Middle/ High
8. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

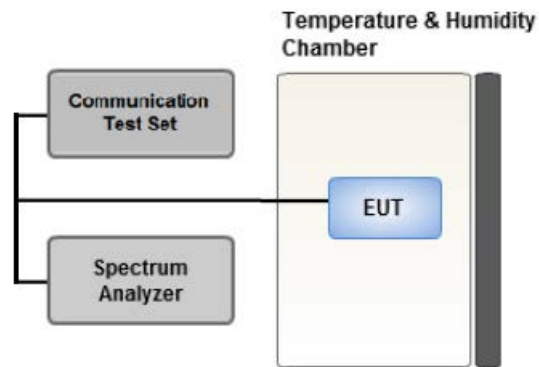

Test setup


Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

Test Notes

1. This test was performed using the spectrum analyzer's CCDF function.

3.5 OCCUPIED BANDWIDTH.

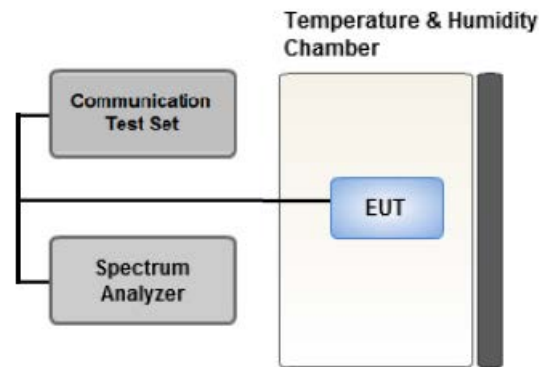

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

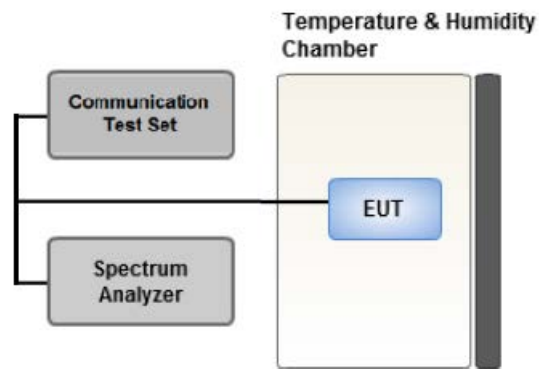

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep = 1001

3.7 CHANNEL EDGE

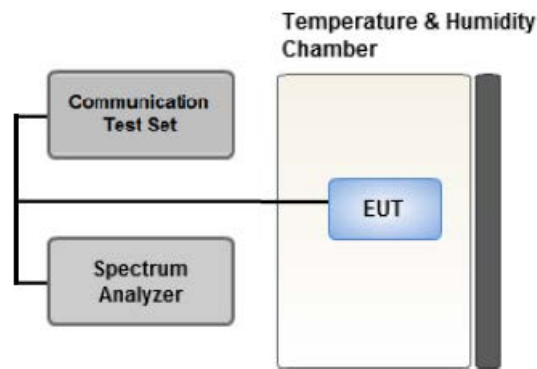

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time > (Number of Points) (Symbol Period)
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6 MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

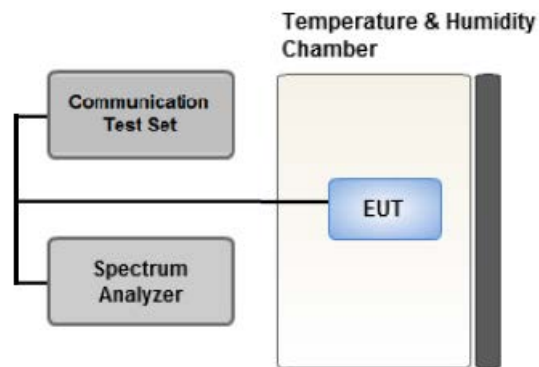

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- Please refer to the table below.
- SM-A276B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-A276B/DS)

[Main 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Y

[Main 3 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - SM-A276B/DS & additional models were tested and the worst case results are reported.
- (Worst case : SM-A276B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
Channel Edge	QPSK	5, 10, 15, 20	Low, Mid, High	Full RB	0
		5, 10, 15, 20	Low, Mid, High	1	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	input 1 + 1.2G HPF+LNA	HCT CO., LTD.	F1L1	12/17/2026	Annual
RF Switching System	input 1 + 3.3 G HPF+LNA	HCT CO., LTD.	F1L2	12/17/2026	Annual
RF Switching System	input 1 + LNA	HCT CO., LTD.	F1L4	12/17/2026	Annual
RF Switching System	Input 2 + 6G HPF + LNA	HCT CO., LTD.	F1L7	12/17/2026	Annual
Broadband LNA	CBL18265035	CERNEX	22966	10/21/2026	Annual
Broadband LNA	CBL26405040	CERNEX	25956	02/09/2027	Annual
Power Splitter	11667B	Hewlett Packard	5001	04/01/2027	Annual
DC Power Supply	E3632A	Agilent	MY40010147	07/29/2026	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/05/2028	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/04/2027	Annual
Horn Antenna	BBHA 9120D	Schwarzbeck	147	08/07/2027	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1298	08/27/2027	Biennial
Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
MXA SIGNAL ANALYZER	N9020A	Agilent	MY52090906	04/08/2027	Annual
20dB ATTENUATOR	8493C	HP	15233	12/10/2026	Annual
Spectrum Analyzer	FSV40	ROHDE & SCHWARZ	100931	07/28/2026	Annual
Wireless Communications Set	E5515C	Agilent	MY48360800	07/29/2026	Annual
Loop Antenna	FMZB1513	Schwarzbeck	1513-333	06/23/2027	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	00895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	SCHWARZBECK MESS- ELEKTRONIK	01135	08/19/2026	Biennial
Radio Communication Analyzer	MT8821C	Anritsu	6262094331	11/24/2026	Annual
Radio Communication Test Station	MT8000A	Anritsu	6272613402	08/18/2026	Annual
SIGNAL GENERATOR	SMB100A	ROHDE & SCHWARZ	177633	07/22/2026	Annual
Signal Analyzer	N9030B	KEYSIGHT	MY55480167	05/14/2026	Annual
SIGNAL ANALYZER	FSW67	ROHDE & SCHWARZ	101736	05/27/2026	Annual
Automation Software	FCC 2G/3G/4G Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC NR Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC LTE Radiated	HCT CO., LTD	-	-	-
Automation Software	FCC NR Radiated	HCT CO., LTD	-	-	-

Note:

- Equipment whose calibration due date was updated during the test period was not used between the previous due date and the update. All reported measurements were performed using equipment within valid calibration.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of ANSI C63.5-2017.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)
Parameter	Expanded Uncertainty ($\pm$ kHz)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.11 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.73 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.54 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.86 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.44 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

-. The decision rule applies 'simple acceptance'

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(m)(4)	■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz	PASS
Conducted Output Power	§ 2.1046	N/A	PASS <u>Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. Refer to the SAR report.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2498.5	LTE B41/ 5 MHz	QPSK	-22.46	14.71	10.70	2.50	H	< 2.00	0.195	22.91	1	0
		16-QAM	-23.11	14.06	10.70	2.50	H		0.168	22.26		
		64-QAM	-24.16	13.01	10.70	2.50	H		0.132	21.21		
		256-QAM	-27.42	9.75	10.70	2.50	H		0.062	17.95		
2593.0		QPSK	-21.83	15.50	10.61	2.55	H		0.227	23.56	1	13
		16-QAM	-22.65	14.68	10.61	2.55	H		0.188	22.74		
		64-QAM	-23.97	13.36	10.61	2.55	H		0.139	21.42		
		256-QAM	-26.68	10.65	10.61	2.55	H		0.074	18.71		
2687.5		QPSK	-22.91	14.63	10.78	2.60	H		0.191	22.81	1	13
		16-QAM	-23.72	13.82	10.78	2.60	H		0.158	22.00		
		64-QAM	-24.72	12.82	10.78	2.60	H		0.126	21.00		
		256-QAM	-27.85	9.69	10.78	2.60	H		0.061	17.87		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2501.0	LTE B41/ 10 MHz	QPSK	-22.23	14.94	10.70	2.50	H	< 2.00	0.206	23.14	1	0
		16-QAM	-23.29	13.88	10.70	2.50	H		0.161	22.08		
		64-QAM	-24.19	12.98	10.70	2.50	H		0.131	21.18		
		256-QAM	-27.24	9.93	10.70	2.50	H		0.065	18.13		
2593.0		QPSK	-22.09	15.24	10.61	2.55	H		0.214	23.30	1	25
		16-QAM	-22.82	14.51	10.61	2.55	H		0.181	22.57		
		64-QAM	-23.76	13.57	10.61	2.55	H		0.146	21.63		
		256-QAM	-27.15	10.18	10.61	2.55	H		0.067	18.24		
2685.0		QPSK	-23.16	14.44	10.77	2.61	H		0.182	22.60	1	49
		16-QAM	-23.80	13.80	10.77	2.61	H		0.157	21.96		
		64-QAM	-24.55	13.05	10.77	2.61	H		0.132	21.21		
		256-QAM	-27.90	9.70	10.77	2.61	H		0.061	17.86		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2503.5	LTE B41/ 15 MHz	QPSK	-22.35	14.96	10.70	2.51	H	< 2.00	0.207	23.15	1	0
		16-QAM	-23.62	13.69	10.70	2.51	H		0.154	21.88		
		64-QAM	-24.22	13.09	10.70	2.51	H		0.134	21.28		
		256-QAM	-27.28	10.03	10.70	2.51	H		0.066	18.22		
2593.0		QPSK	-22.43	14.90	10.61	2.55	H		0.198	22.96	1	38
		16-QAM	-23.01	14.32	10.61	2.55	H		0.173	22.38		
		64-QAM	-24.24	13.09	10.61	2.55	H		0.130	21.15		
		256-QAM	-27.21	10.12	10.61	2.55	H		0.066	18.18		
2682.5		QPSK	-23.06	14.54	10.77	2.61	H		0.186	22.70	1	74
		16-QAM	-24.17	13.43	10.77	2.61	H		0.144	21.59		
		64-QAM	-24.74	12.86	10.77	2.61	H		0.126	21.02		
		256-QAM	-28.12	9.48	10.77	2.61	H		0.058	17.64		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2506.0	LTE B41/ 20 MHz	QPSK	-22.40	14.91	10.70	2.51	H	< 2.00	0.204	23.10	1	50
		16-QAM	-23.37	13.94	10.70	2.51	H		0.163	22.13		
		64-QAM	-24.18	13.13	10.70	2.51	H		0.136	21.32		
		256-QAM	-27.23	10.08	10.70	2.51	H		0.067	18.27		
2593.0		QPSK	-22.13	15.20	10.61	2.55	H		0.212	23.26	1	50
		16-QAM	-23.17	14.16	10.61	2.55	H		0.167	22.22		
		64-QAM	-23.82	13.51	10.61	2.55	H		0.144	21.57		
		256-QAM	-27.51	9.82	10.61	2.55	H		0.061	17.88		
2680.0		QPSK	-23.16	14.49	10.76	2.61	H		0.184	22.64	1	99
		16-QAM	-24.28	13.37	10.76	2.61	H		0.142	21.52		
		64-QAM	-24.90	12.75	10.76	2.61	H		0.123	20.90		
		256-QAM	-28.13	9.52	10.76	2.61	H		0.058	17.67		

8.2 RADIATED SPURIOUS EMISSIONS

□ MODE: LTE B41
 □ MODULATION SIGNAL: 5 MHz QPSK
 □ DISTANCE: 1 meters
 □ LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39675 (2498.5)	4 997.00	-42.80	12.70	-66.31	3.70	V	-57.31	1	0
		-41.09		-64.60		H	-55.60		
	7 495.50	-35.01	11.14	-50.35	4.61	V	-43.82		
		-35.67		-51.01		H	-44.48		
	9 994.00	-47.33	10.89	-58.19	5.47	V	-52.77		
		-46.86		-57.72		H	-52.30		
40620 (2593.0)	5 186.00	-40.47	12.89	-64.61	3.80	V	-55.52	1	13
		-39.64		-63.78		H	-54.69		
	7 779.00	-32.66	11.75	-48.96	4.70	V	-41.91		
		-32.93		-49.23		H	-42.18		
	10 372.00	-44.96	10.75	-54.98	5.55	V	-49.78		
		-45.55		-55.57		H	-50.37		
41565 (2687.5)	5 375.00	-41.50	13.32	-66.36	3.91	V	-56.95	1	13
		-40.69		-65.55		H	-56.14		
	8 062.50	-35.19	11.20	-48.72	4.82	V	-42.34		
		-37.49		-51.02		H	-44.64		
	10 750.00	-45.76	10.85	-55.10	5.64	V	-49.89		
		-46.06		-55.40		H	-50.19		

MODE: LTE B41
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39700 (2501.0)	5 002.00	-42.49	12.68	-66.25	3.71	V	-57.28	1	0
		-41.75		-65.51		H	-56.54		
	7 503.00	-38.12	11.17	-52.98	4.60	V	-46.41		
		-35.10		-49.96		H	-43.39		
	10 004.00	-46.82	10.91	-57.74	5.47	V	-52.30		
		-47.17		-58.09		H	-52.65		
40620 (2593.0)	5 186.00	-40.93	12.89	-65.07	3.80	V	-55.98	1	25
		-40.52		-64.66		H	-55.57		
	7 779.00	-29.90	11.75	-46.20	4.70	V	-39.15		
		-31.02		-47.32		H	-40.27		
	10 372.00	-47.16	10.75	-57.18	5.55	V	-51.98		
		-46.99		-57.01		H	-51.81		
41540 (2685.0)	5 370.00	-43.81	13.33	-68.79	3.92	V	-59.38	1	49
		-42.12		-67.10		H	-57.69		
	8 055.00	-35.28	11.19	-48.75	4.81	V	-42.37		
		-39.39		-52.86		H	-46.48		
	10 740.00	-46.28	10.87	-55.11	5.64	V	-49.88		
		-46.12		-54.95		H	-49.72		

■ MODE: LTE B41
 ■ MODULATION SIGNAL: 15 MHz QPSK
 ■ DISTANCE: 1 meters
 ■ LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39725 (2503.5)	5 007.00	-42.41	12.66	-66.55	3.71	V	-57.60	1	0
		-43.23		-67.37		H	-58.42		
	7 510.50	-38.62	11.18	-53.26	4.60	V	-46.68		
		-35.38		-50.02		H	-43.44		
	10 014.00	-47.23	10.92	-58.16	5.47	V	-52.71		
		-47.76		-58.69		H	-53.24		
40620 (2593.0)	5 186.00	-40.33	12.89	-64.47	3.80	V	-55.38	1	38
		-39.84		-63.98		H	-54.89		
	7 779.00	-31.76	11.75	-48.06	4.70	V	-41.01		
		-33.45		-49.75		H	-42.70		
	10 372.00	-46.47	10.75	-56.49	5.55	V	-51.29		
		-46.64		-56.66		H	-51.46		
41515 (2682.5)	5 365.00	-42.29	13.34	-67.44	3.91	V	-58.01	1	74
		-42.72		-67.87		H	-58.44		
	8 047.50	-35.64	11.19	-49.09	4.81	V	-42.71		
		-39.79		-53.24		H	-46.86		
	10 730.00	-44.35	10.89	-52.94	5.65	V	-47.70		
		-45.26		-53.85		H	-48.61		

MODE: LTE B41
 MODULATION SIGNAL: 20 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39750 (2506.0)	5 012.00	-42.30	12.65	-66.81	3.72	V	-57.88	1	50
		-42.01		-66.52		H	-57.59		
	7 518.00	-38.02	11.22	-52.52	4.61	V	-45.91		
		-33.42		-47.92		H	-41.31		
	10 024.00	-46.97	10.93	-58.06	5.47	V	-52.60		
		-46.43		-57.52		H	-52.06		
40620 (2593.0)	5 186.00	-42.41	12.89	-66.55	3.80	V	-57.46	1	50
		-39.67		-63.81		H	-54.72		
	7 779.00	-33.19	11.75	-49.49	4.70	V	-42.44		
		-32.74		-49.04		H	-41.99		
	10 372.00	-44.45	10.75	-54.47	5.55	V	-49.27		
		-45.73		-55.75		H	-50.55		
41490 (2680.0)	5 360.00	-42.88	13.35	-68.20	3.90	V	-58.75	1	99
		-41.61		-66.93		H	-57.48		
	8 040.00	-36.30	11.19	-49.57	4.80	V	-43.18		
		-40.07		-53.34		H	-46.95		
	10 720.00	-45.89	10.90	-54.63	5.64	V	-49.37		
		-47.08		-55.82		H	-50.56		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)	Limit (dB)
LTE B41	5 MHz	2593.0	QPSK	25	0	6.07	13.00
			16-QAM			7.05	
			64-QAM			7.29	
			256-QAM			7.32	
	10 MHz		QPSK	50		5.88	
			16-QAM			6.73	
			64-QAM			7.26	
			256-QAM			7.38	
	15 MHz		QPSK	75		5.79	
			16-QAM			6.64	
			64-QAM			7.04	
			256-QAM			7.35	
	20 MHz		QPSK	100		5.79	
			16-QAM			6.63	
			64-QAM			6.95	
			256-QAM			7.31	

Note:

1. P.A.P.R is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
LTE B41	5 MHz	2593.0	QPSK	25	0	4.5216
			16-QAM			4.4917
			64-QAM			4.5250
			256-QAM			4.5101
	10 MHz		QPSK	50		8.9860
			16-QAM			9.0183
			64-QAM			8.9815
			256-QAM			9.0122
	15 MHz		QPSK	75		13.459
			16-QAM			13.480
			64-QAM			13.489
			256-QAM			13.455
	20 MHz		QPSK	100		17.929
			16-QAM			17.993
			64-QAM			17.962
			256-QAM			17.947

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
LTE B41	5	2498.5	3.6890	31.955	-61.962	-30.007	-25.00
		2593.0	3.7688	31.955	-62.068	-30.113	
		2687.5	5.2244	32.570	-61.499	-28.929	
	10	2501.0	3.0609	31.955	-61.828	-29.873	
		2593.0	3.6790	31.955	-61.723	-29.768	
		2685.0	7.2583	32.570	-61.901	-29.331	
	15	2503.5	3.6691	31.955	-61.439	-29.484	
		2593.0	5.5534	32.570	-62.077	-29.507	
		2682.5	3.6990	31.955	-61.395	-29.440	
	20	2506.0	6.5304	32.570	-61.223	-28.653	
		2593.0	5.9622	32.570	-61.810	-29.240	
		2680.0	3.6990	31.955	-62.343	-30.388	

Note:

1. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

8.6 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1 MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-23.79	-23.19	-22.32	-22.03	-34.51	-34.11	-34.24
10 MHz	2501.0	QPSK	50/0	-26.64	-26.58	-24.17	-24.15	-30.74	-29.29	-35.89
15 MHz	2503.5	QPSK	75/0	-27.86	-28.14	-25.67	-26.09	-29.80	-29.22	-39.11
20 MHz	2506.0	QPSK	100/0	-27.84	-28.75	-25.87	-26.68	-29.48	-29.46	-39.68
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-23.67	-23.42	-23.52	-23.47
	2687.5	QPSK	25	0	-23.99	-23.29	-26.69	-25.49
10 MHz	2593.0	QPSK	50	0	-26.60	-26.97	-25.39	-25.59
	2685.0	QPSK	50	0	-28.27	-27.62	-28.91	-27.42
15 MHz	2593.0	QPSK	75	0	-28.44	-29.02	-26.73	-27.60
	2682.5	QPSK	75	0	-30.06	-29.40	-29.91	-28.62
20 MHz	2593.0	QPSK	100	0	-28.54	-29.91	-26.95	-28.29
	2680.0	QPSK	100	0	-30.49	-30.47	-29.70	-29.20
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-33.03	-33.90	-32.82	-33.88
	2687.5	QPSK	25	0	-33.08	-32.21	-33.07	-31.92
10 MHz	2593.0	QPSK	50	0	-30.08	-30.67	-34.21	-35.89
	2685.0	QPSK	50	0	-32.67	-30.97	-34.14	-33.31
15 MHz	2593.0	QPSK	75	0	-29.87	-30.65	-36.75	-38.94
	2682.5	QPSK	75	0	-32.93	-31.04	-35.90	-35.92
20 MHz	2593.0	QPSK	100	0	-29.68	-31.08	-38.19	-39.73
	2680.0	QPSK	100	0	-32.22	-31.41	-36.63	-37.90
Limit(dBm)					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. RB = Resource Block
5. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 3.979

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2498,500,000 Hz</u>
BANDWIDTH:	<u>39675 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2498 500 008	0.0	0.000 000	0.000
100 %		-30	2498 500 018	9.5	0.000 000	0.004
100 %		-20	2498 500 018	9.5	0.000 000	0.004
100 %		-10	2498 500 016	8.1	0.000 000	0.003
100 %		0	2498 500 016	7.5	0.000 000	0.003
100 %		+10	2498 500 014	6.1	0.000 000	0.002
100 %		+30	2498 500 015	7.1	0.000 000	0.003
100 %		+40	2498 500 016	7.8	0.000 000	0.003
100 %		+50	2498 500 017	9.0	0.000 000	0.004
Batt. Endpoint	3.300	+20	2498 500 013	4.9	0.000 000	0.002

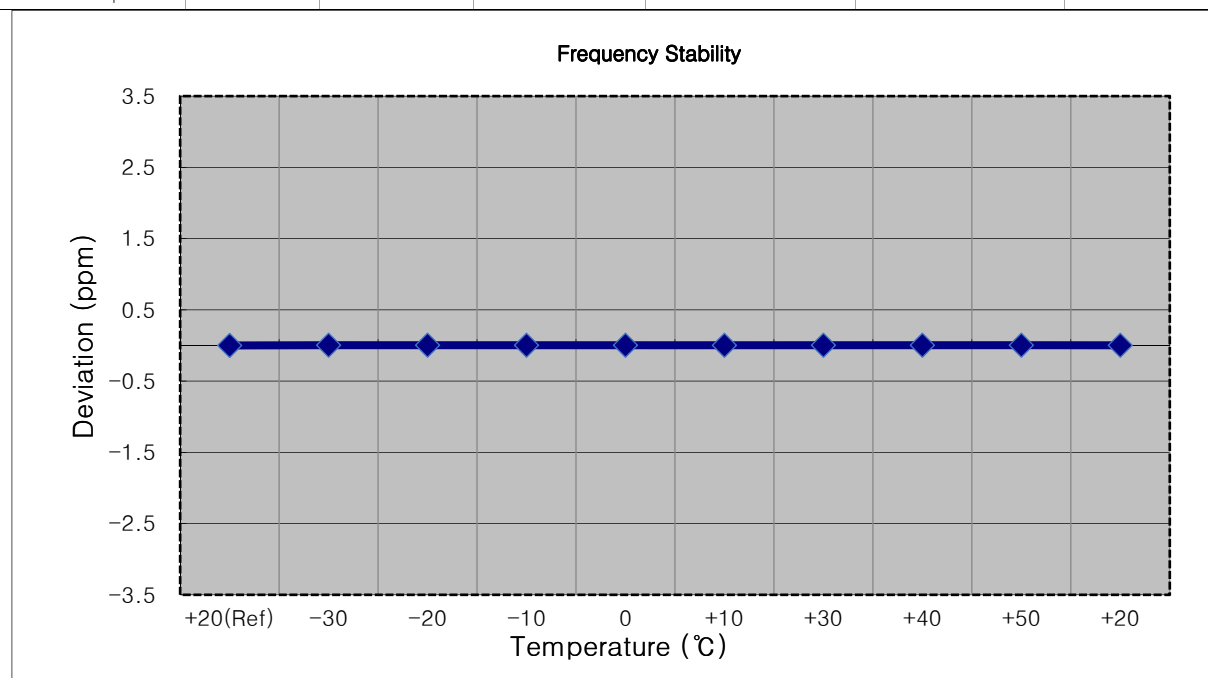


☐ MODE: LTE B41
☐ OPERATING FREQUENCY: 2501,000,000 Hz
☐ BANDWIDTH: 39700 (10 MHz)
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2501 000 006	0.0	0.000 000	0.000
100 %		-30	2501 000 012	6.3	0.000 000	0.003
100 %		-20	2501 000 013	6.5	0.000 000	0.003
100 %		-10	2501 000 015	8.7	0.000 000	0.003
100 %		0	2501 000 010	3.8	0.000 000	0.002
100 %		+10	2501 000 012	6.2	0.000 000	0.002
100 %		+30	2501 000 014	8.0	0.000 000	0.003
100 %		+40	2501 000 012	6.4	0.000 000	0.003
100 %		+50	2501 000 014	7.7	0.000 000	0.003
Batt. Endpoint	3.300	+20	2501 000 010	3.9	0.000 000	0.002

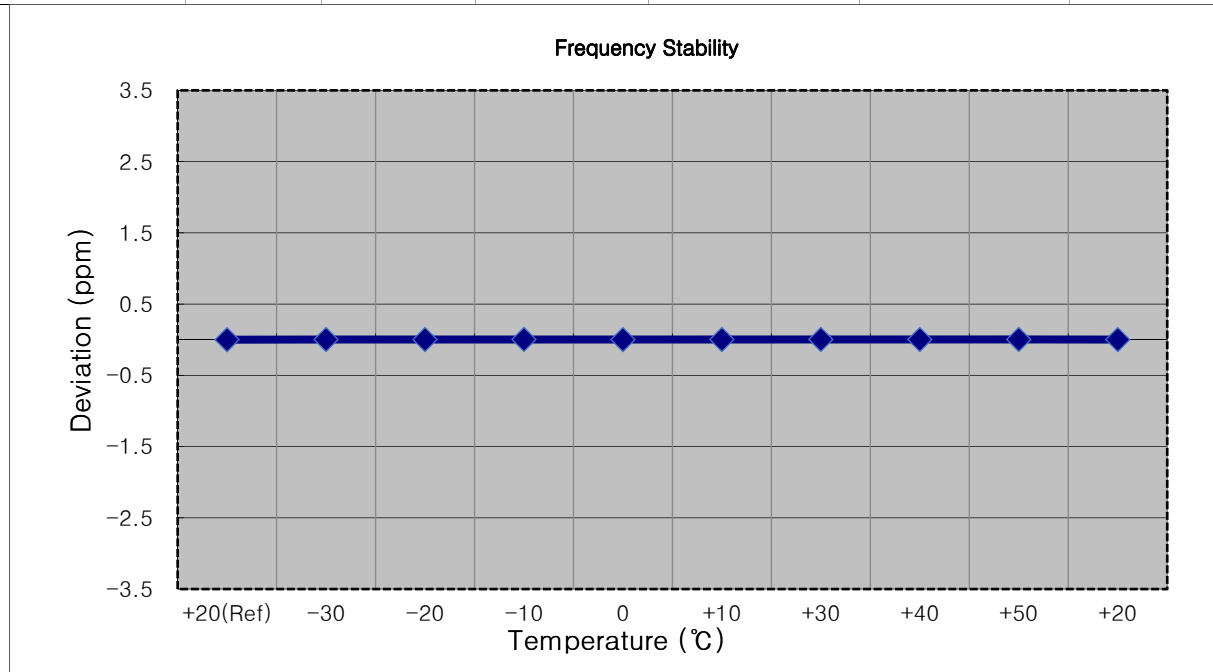


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2503,500,000 Hz</u>
BANDWIDTH:	<u>39725 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2503 500 005	0.0	0.000 000	0.000
100 %		-30	2503 500 010	5.2	0.000 000	0.002
100 %		-20	2503 500 010	5.4	0.000 000	0.002
100 %		-10	2503 500 011	6.5	0.000 000	0.003
100 %		0	2503 500 013	7.7	0.000 000	0.003
100 %		+10	2503 500 012	6.7	0.000 000	0.003
100 %		+30	2503 500 013	8.0	0.000 000	0.003
100 %		+40	2503 500 011	6.2	0.000 000	0.002
100 %		+50	2503 500 012	7.0	0.000 000	0.003
Batt. Endpoint	3.300	+20	2503 500 012	7.5	0.000 000	0.003

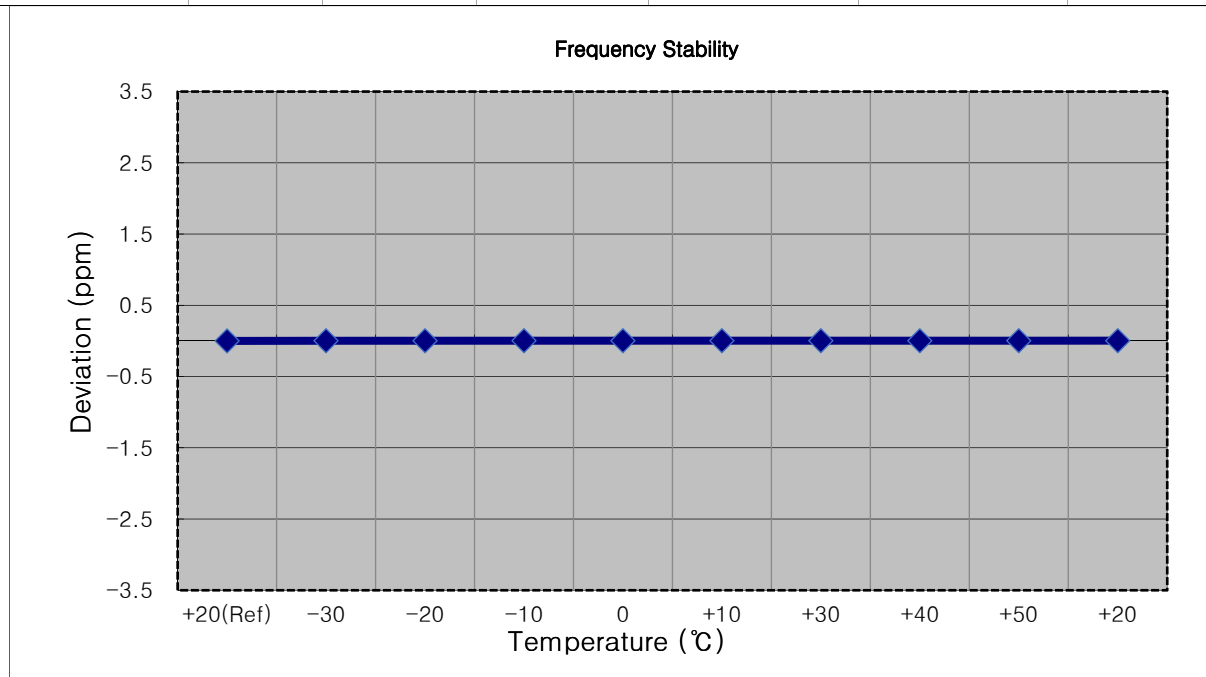


- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2506 000 007	0.0	0.000 000	0.000
100 %		-30	2506 000 012	5.2	0.000 000	0.002
100 %		-20	2506 000 014	6.9	0.000 000	0.003
100 %		-10	2506 000 012	5.4	0.000 000	0.002
100 %		0	2506 000 015	8.7	0.000 000	0.003
100 %		+10	2506 000 013	5.8	0.000 000	0.002
100 %		+30	2506 000 013	6.1	0.000 000	0.002
100 %		+40	2506 000 011	4.2	0.000 000	0.002
100 %		+50	2506 000 012	4.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	2506 000 012	4.9	0.000 000	0.002

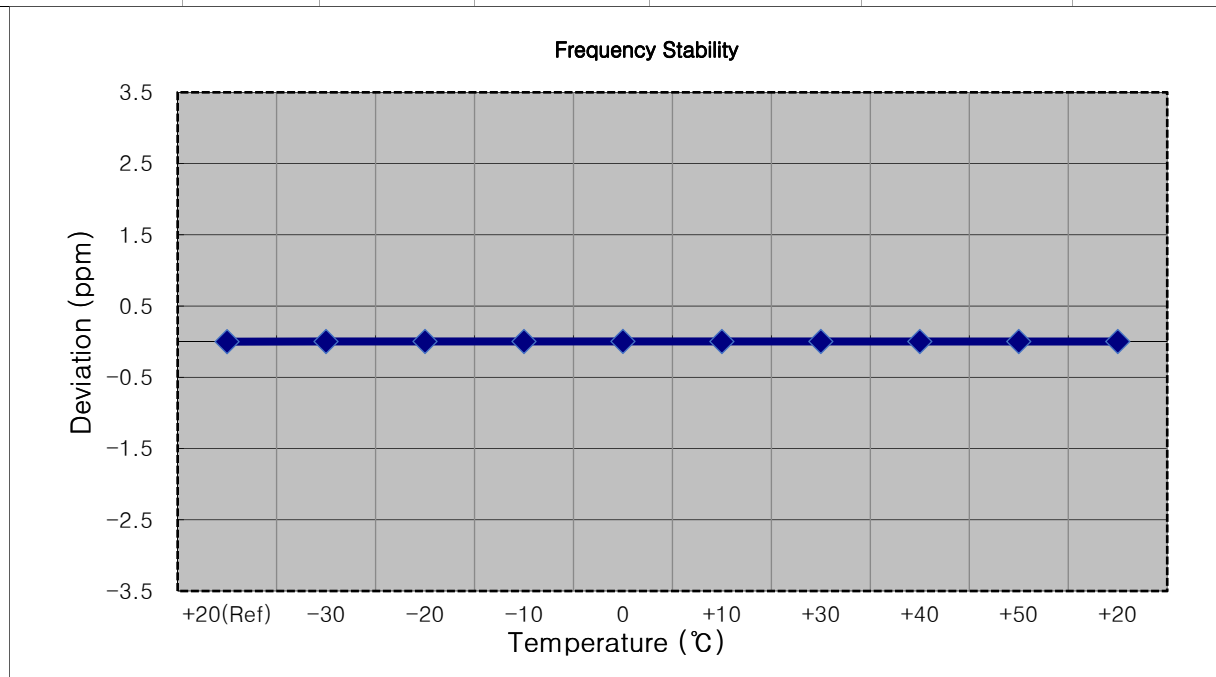


■ **MODE:** LTE B41
 ■ **OPERATING FREQUENCY:** 2593,000,000 Hz
 ■ **BANDWIDTH:** 40620 (5 MHz)
 ■ **REFERENCE VOLTAGE:** 3.880 VDC
 ■ **DEVIATION LIMIT:** Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2593 000 006	0.0	0.000 000	0.000
100 %		-30	2593 000 011	5.0	0.000 000	0.002
100 %		-20	2593 000 013	6.8	0.000 000	0.003
100 %		-10	2593 000 011	5.2	0.000 000	0.002
100 %		0	2593 000 011	4.9	0.000 000	0.002
100 %		+10	2593 000 013	6.8	0.000 000	0.003
100 %		+30	2593 000 009	2.7	0.000 000	0.001
100 %		+40	2593 000 013	6.7	0.000 000	0.003
100 %		+50	2593 000 011	4.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	2593 000 012	6.1	0.000 000	0.002

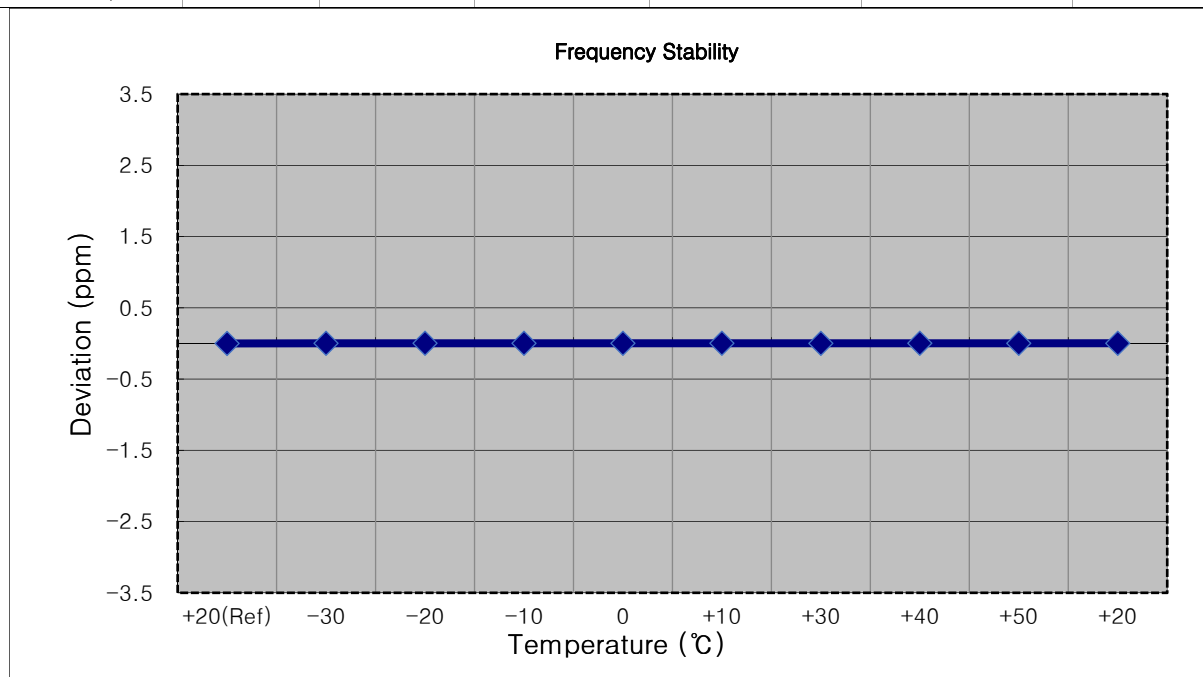


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
BANDWIDTH:	<u>40620 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2593 000 005	0.0	0.000 000	0.000
100 %		-30	2593 000 009	4.7	0.000 000	0.002
100 %		-20	2593 000 008	3.2	0.000 000	0.001
100 %		-10	2593 000 009	4.3	0.000 000	0.002
100 %		0	2593 000 010	5.7	0.000 000	0.002
100 %		+10	2593 000 007	2.7	0.000 000	0.001
100 %		+30	2593 000 009	4.2	0.000 000	0.002
100 %		+40	2593 000 008	3.2	0.000 000	0.001
100 %		+50	2593 000 007	2.6	0.000 000	0.001
Batt. Endpoint	3.300	+20	2593 000 008	3.0	0.000 000	0.001

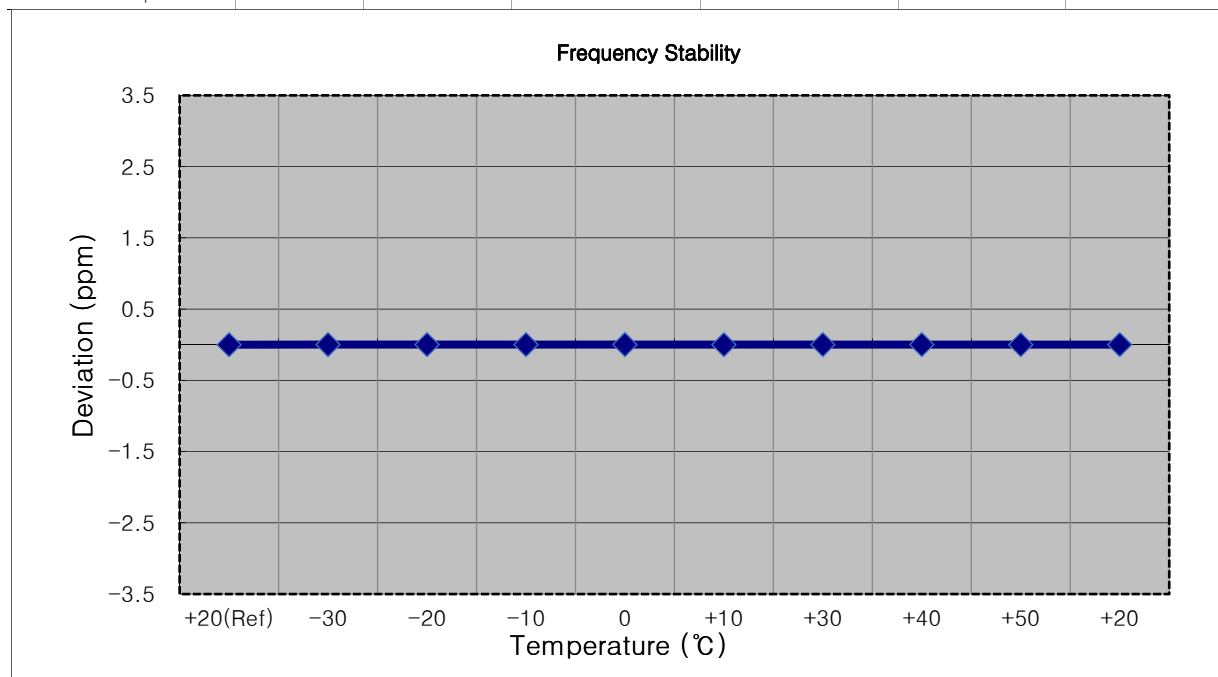


☐ MODE: LTE B41
☐ OPERATING FREQUENCY: 2593,000,000 Hz
☐ BANDWIDTH: 40620 (15 MHz)
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2593 000 004	0.0	0.000 000	0.000
100 %		-30	2593 000 008	3.4	0.000 000	0.001
100 %		-20	2593 000 007	2.5	0.000 000	0.001
100 %		-10	2593 000 001	-3.4	0.000 000	-0.001
100 %		0	2593 000 001	-3.2	0.000 000	-0.001
100 %		+10	2593 000 002	-2.2	0.000 000	-0.001
100 %		+30	2593 000 003	-1.3	0.000 000	-0.001
100 %		+40	2593 000 000	-4.6	0.000 000	-0.002
100 %		+50	2593 000 002	-1.9	0.000 000	-0.001
Batt. Endpoint	3.300	+20	2593 000 007	2.9	0.000 000	0.001

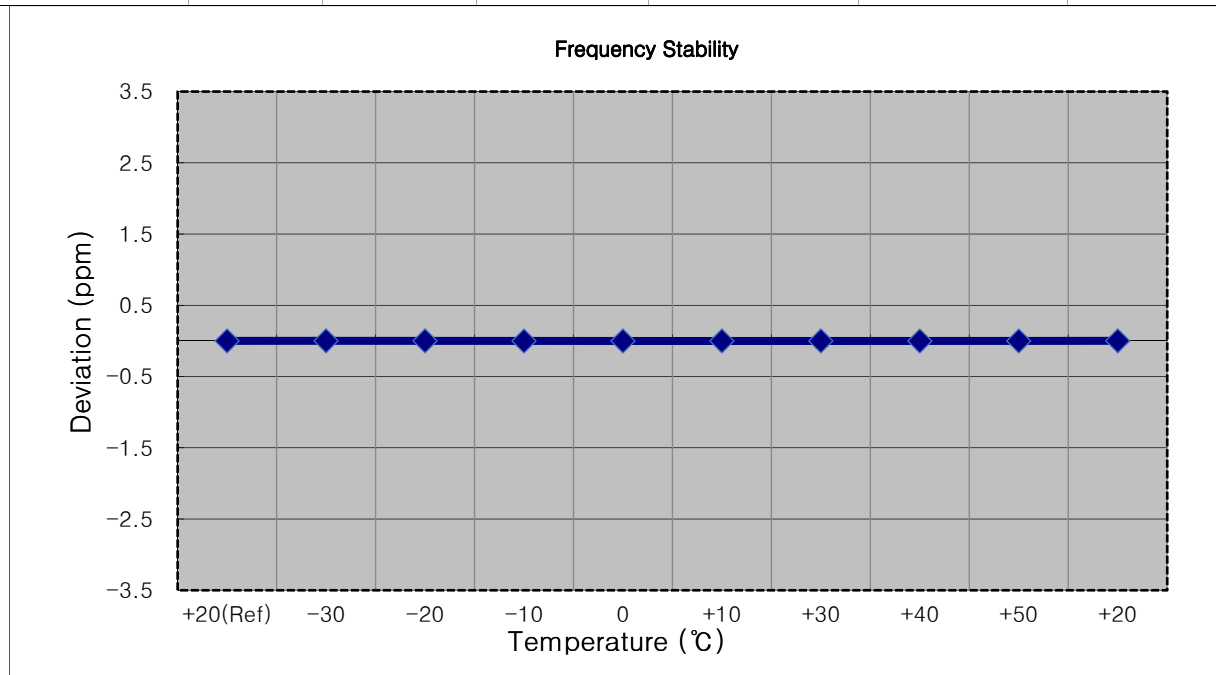


- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2593 000 006	0.0	0.000 000	0.000
100 %		-30	2593 000 004	-2.4	0.000 000	-0.001
100 %		-20	2593 000 010	3.6	0.000 000	0.001
100 %		-10	2593 000 012	5.3	0.000 000	0.002
100 %		0	2593 000 002	-4.5	0.000 000	-0.002
100 %		+10	2593 000 008	1.6	0.000 000	0.001
100 %		+30	2593 000 010	3.6	0.000 000	0.001
100 %		+40	2593 000 009	2.2	0.000 000	0.001
100 %		+50	2593 000 008	1.8	0.000 000	0.001
Batt. Endpoint	3.300	+20	2593 000 004	-2.3	0.000 000	-0.001

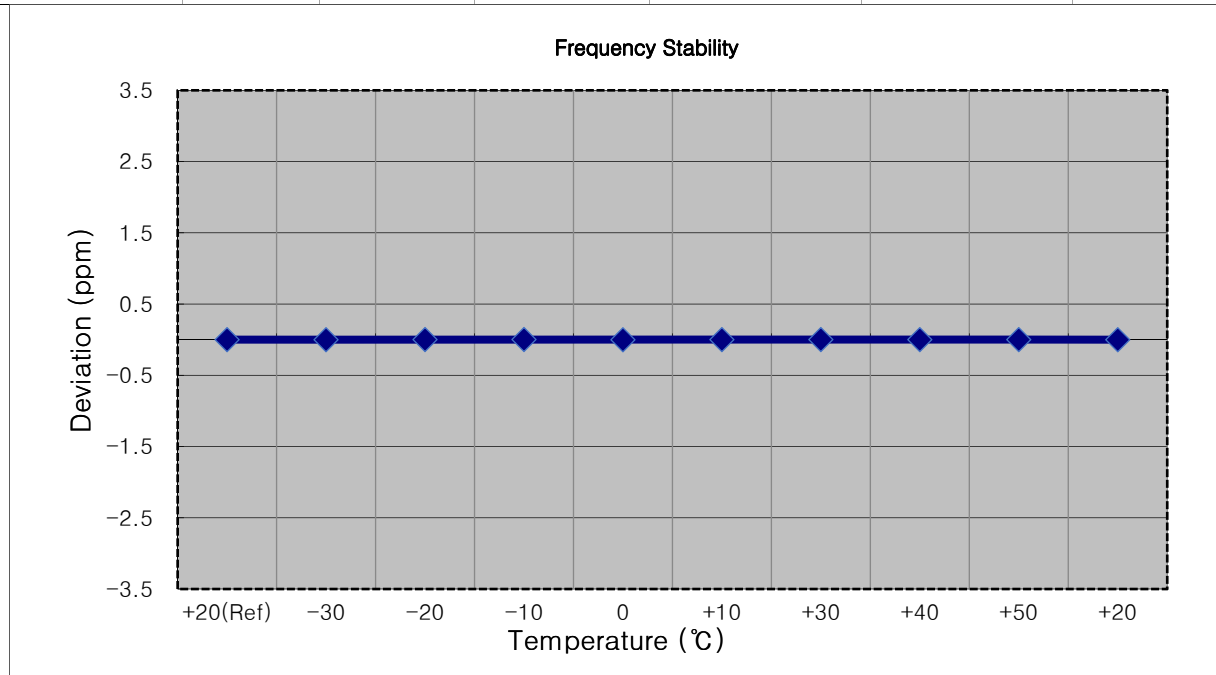


MODE: LTE B41
 OPERATING FREQUENCY: 2687,500,000 Hz
 BANDWIDTH: 41565 (5 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2687 500 003	0.0	0.000 000	0.000
100 %		-30	2687 500 009	5.6	0.000 000	0.002
100 %		-20	2687 500 008	4.8	0.000 000	0.002
100 %		-10	2687 500 008	4.3	0.000 000	0.002
100 %		0	2687 500 009	5.7	0.000 000	0.002
100 %		+10	2687 500 008	5.0	0.000 000	0.002
100 %		+30	2687 500 008	4.6	0.000 000	0.002
100 %		+40	2687 500 011	8.0	0.000 000	0.003
100 %		+50	2687 500 009	6.1	0.000 000	0.002
Batt. Endpoint	3.300	+20	2687 500 007	3.7	0.000 000	0.001

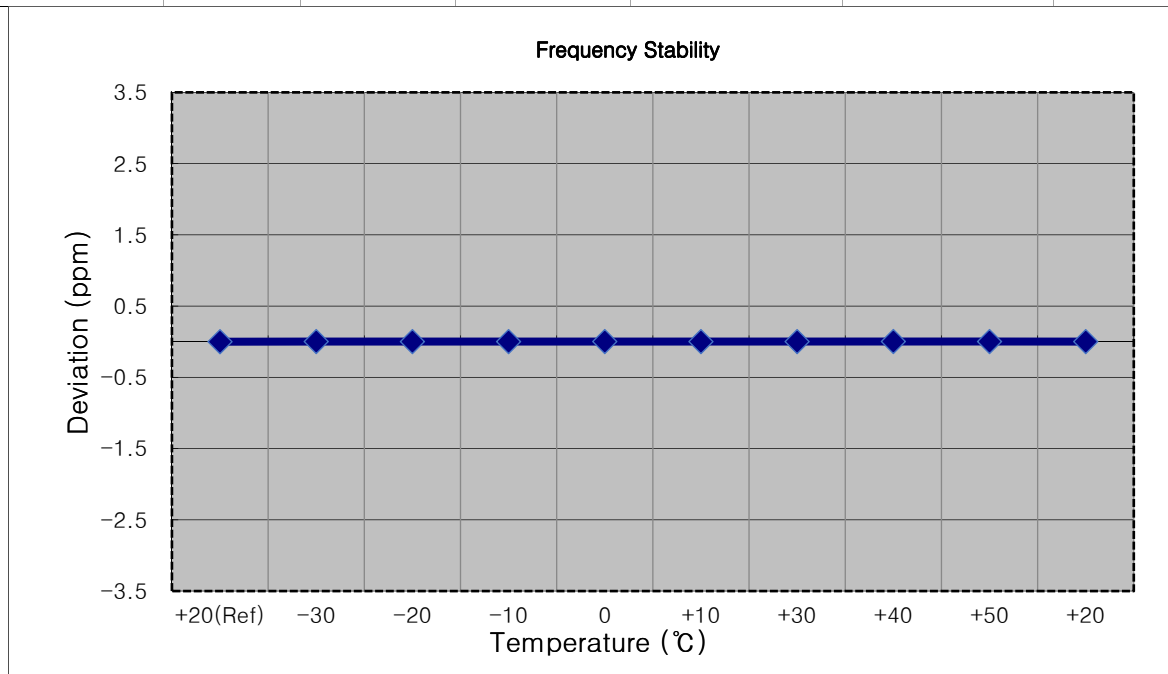


MODE: LTE B41
 OPERATING FREQUENCY: 2685,000,000 Hz
 BANDWIDTH: 41540 (10 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2685 000 006	0.0	0.000 000	0.000
100 %		-30	2685 000 009	2.8	0.000 000	0.001
100 %		-20	2685 000 011	4.7	0.000 000	0.002
100 %		-10	2685 000 010	3.9	0.000 000	0.001
100 %		0	2685 000 010	3.7	0.000 000	0.001
100 %		+10	2685 000 009	3.1	0.000 000	0.001
100 %		+30	2685 000 009	2.7	0.000 000	0.001
100 %		+40	2685 000 010	4.2	0.000 000	0.002
100 %		+50	2685 000 007	1.1	0.000 000	0.000
Batt. Endpoint	3.300	+20	2685 000 011	5.3	0.000 000	0.002

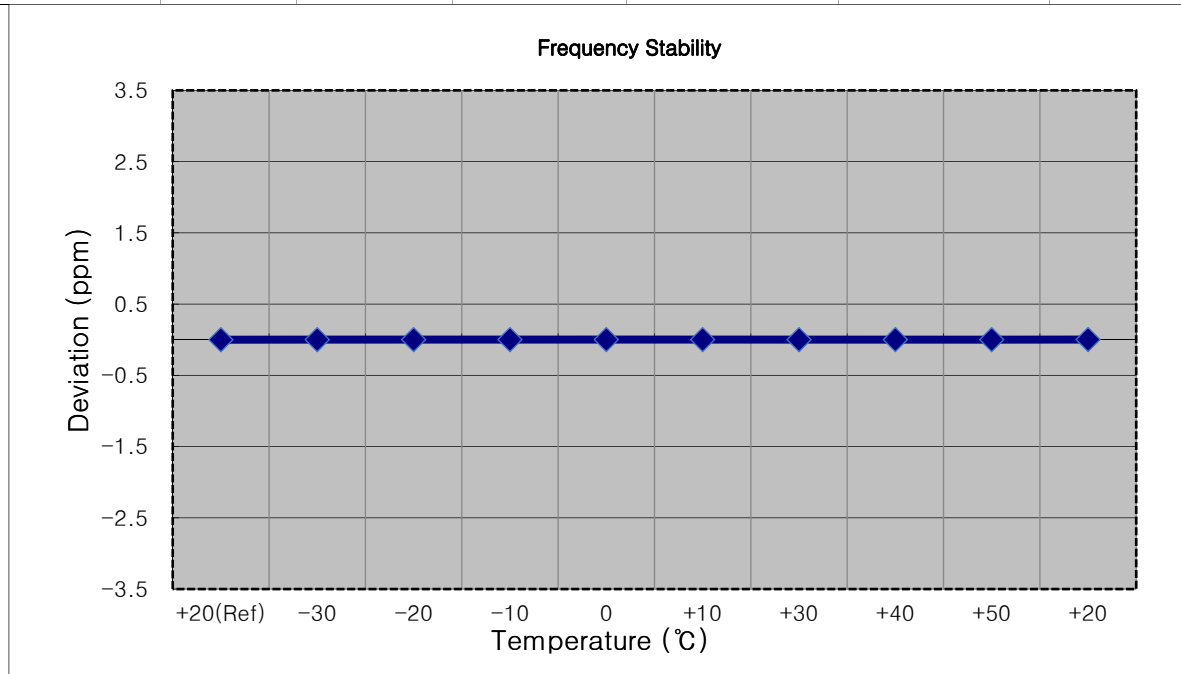


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2682,500,000 Hz</u>
BANDWIDTH:	<u>41515 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2682 499 993	0.0	0.000 000	0.000
100 %		-30	2682 499 998	4.8	0.000 000	0.002
100 %		-20	2682 499 998	4.6	0.000 000	0.002
100 %		-10	2682 499 990	-3.5	0.000 000	-0.001
100 %		0	2682 499 999	5.9	0.000 000	0.002
100 %		+10	2682 499 999	5.8	0.000 000	0.002
100 %		+30	2682 499 996	2.8	0.000 000	0.001
100 %		+40	2682 499 998	4.8	0.000 000	0.002
100 %		+50	2682 499 989	-3.8	0.000 000	-0.001
Batt. Endpoint	3.300	+20	2682 499 991	-1.8	0.000 000	-0.001

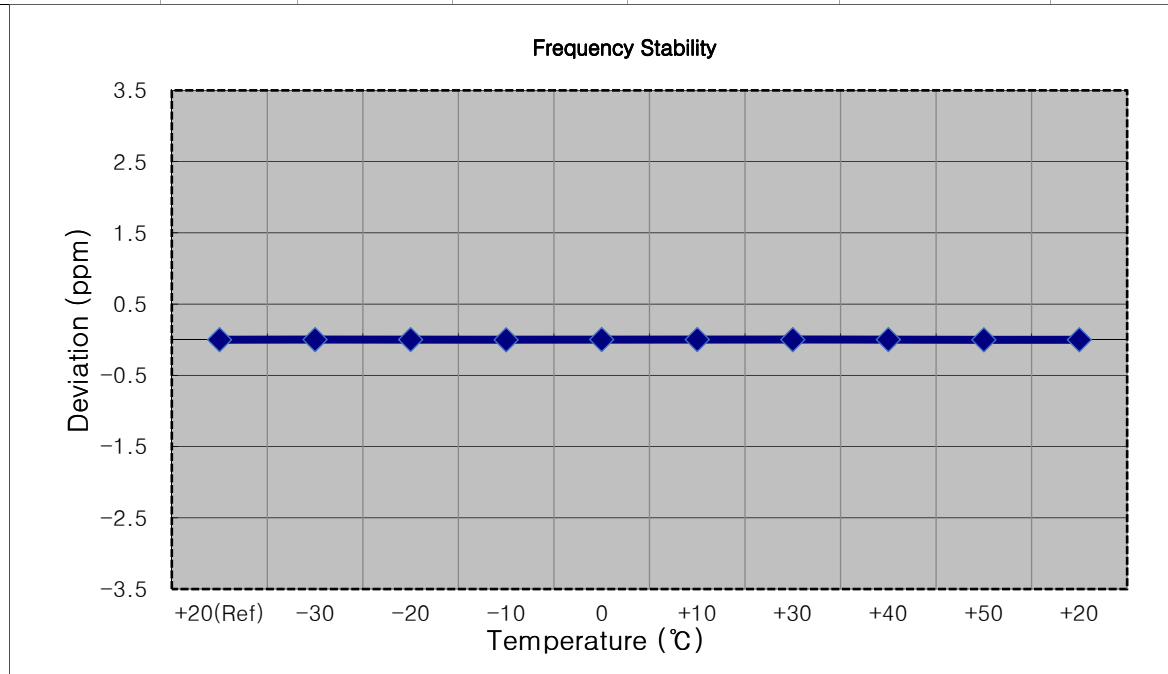

- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2680 000 005	0.0	0.000 000	0.000
100 %		-30	2680 000 011	5.9	0.000 000	0.002
100 %		-20	2680 000 004	-1.7	0.000 000	-0.001
100 %		-10	2680 000 010	4.1	0.000 000	0.002
100 %		0	2680 000 008	2.2	0.000 000	0.001
100 %		+10	2680 000 011	5.6	0.000 000	0.002
100 %		+30	2680 000 010	4.4	0.000 000	0.002
100 %		+40	2680 000 003	-2.5	0.000 000	-0.001
100 %		+50	2680 000 010	4.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	2680 000 009	3.5	0.000 000	0.001

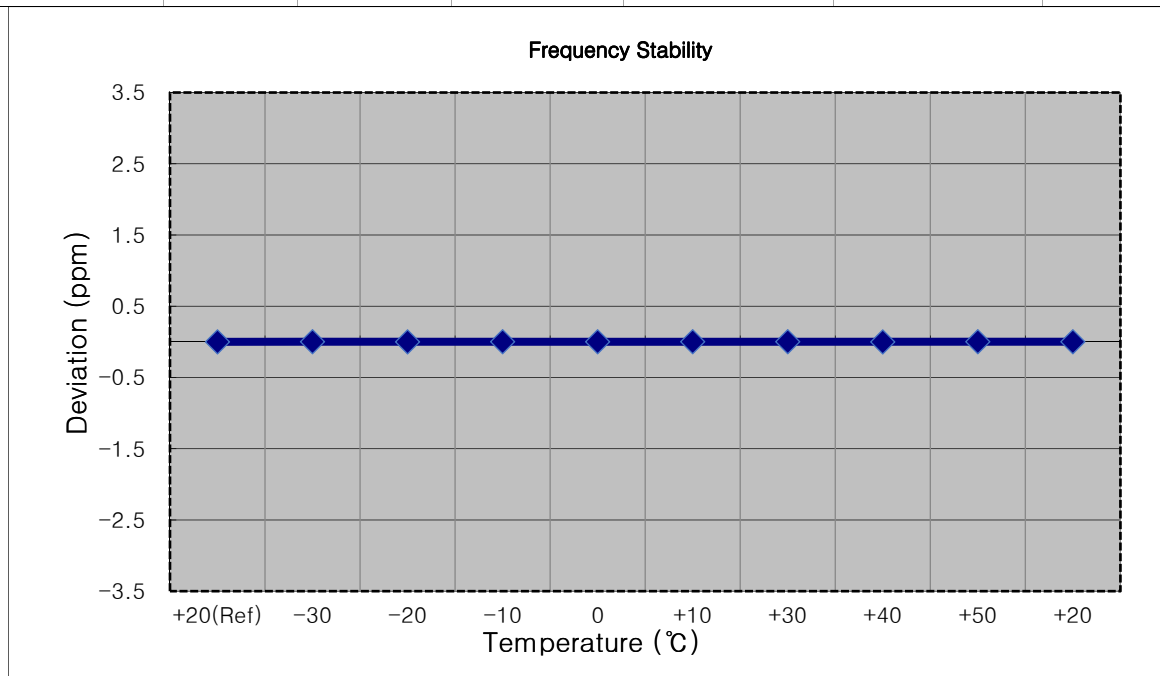

9. TEST DATA(Main 3 ANT)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2498.5	LTE B41 5 MHz	QPSK	-25.19	11.98	10.70	2.50	H	< 2.00	0.104	20.18	1	13
		16-QAM	-26.42	10.75	10.70	2.50	H		0.079	18.95		
		64-QAM	-27.33	9.84	10.70	2.50	H		0.064	18.04		
		256-QAM	-30.28	6.89	10.70	2.50	H		0.032	15.09		
2593.0		QPSK	-21.76	15.57	10.61	2.55	H		0.231	23.63	1	13
		16-QAM	-22.55	14.78	10.61	2.55	H		0.192	22.84		
		64-QAM	-24.43	12.90	10.61	2.55	H		0.125	20.96		
		256-QAM	-27.46	9.87	10.61	2.55	H		0.062	17.93		
2687.5		QPSK	-24.54	13.00	10.78	2.60	H		0.131	21.18	1	0
		16-QAM	-25.20	12.34	10.78	2.60	H		0.113	20.52		
		64-QAM	-26.63	10.91	10.78	2.60	H		0.081	19.09		
		256-QAM	-29.29	8.25	10.78	2.60	H		0.044	16.43		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2501.0	LTE B41 10 MHz	QPSK	-24.99	12.18	10.70	2.50	H	< 2.00	0.109	20.38	1	49
		16-QAM	-25.44	11.73	10.70	2.50	H		0.098	19.93		
		64-QAM	-26.24	10.93	10.70	2.50	H		0.082	19.13		
		256-QAM	-29.87	7.30	10.70	2.50	H		0.035	15.50		
2593.0		QPSK	-22.18	15.15	10.61	2.55	H		0.209	23.21	1	49
		16-QAM	-22.85	14.48	10.61	2.55	H		0.179	22.54		
		64-QAM	-23.95	13.38	10.61	2.55	H		0.139	21.44		
		256-QAM	-26.67	10.66	10.61	2.55	H		0.074	18.72		
2685.0		QPSK	-24.97	12.63	10.77	2.61	H		0.120	20.79	1	25
		16-QAM	-25.02	12.58	10.77	2.61	H		0.119	20.74		
		64-QAM	-26.24	11.36	10.77	2.61	H		0.090	19.52		
		256-QAM	-29.08	8.52	10.77	2.61	H		0.047	16.68		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2503.5	LTE B41 15 MHz	QPSK	-25.34	11.97	10.70	2.51	H	< 2.00	0.104	20.16	1	38
		16-QAM	-26.09	11.22	10.70	2.51	H		0.087	19.41		
		64-QAM	-27.16	10.15	10.70	2.51	H		0.068	18.34		
		256-QAM	-29.89	7.42	10.70	2.51	H		0.036	15.61		
2593.0		QPSK	-21.86	15.47	10.61	2.55	H		0.225	23.53	1	0
		16-QAM	-23.29	14.04	10.61	2.55	H		0.162	22.10		
		64-QAM	-24.14	13.19	10.61	2.55	H		0.133	21.25		
		256-QAM	-27.24	10.09	10.61	2.55	H		0.065	18.15		
2682.5		QPSK	-24.19	13.41	10.77	2.61	H		0.144	21.57	1	0
		16-QAM	-25.21	12.39	10.77	2.61	H		0.114	20.55		
		64-QAM	-26.54	11.06	10.77	2.61	H		0.084	19.22		
		256-QAM	-29.29	8.31	10.77	2.61	H		0.044	16.47		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
2506.0	LTE B41 20 MHz	QPSK	-24.57	12.74	10.70	2.51	H	< 2.00	0.124	20.93	1	99
		16-QAM	-25.08	12.23	10.70	2.51	H		0.110	20.42		
		64-QAM	-26.07	11.24	10.70	2.51	H		0.088	19.43		
		256-QAM	-29.15	8.16	10.70	2.51	H		0.043	16.35		
2593.0		QPSK	-22.17	15.16	10.61	2.55	H		0.210	23.22	1	50
		16-QAM	-23.19	14.14	10.61	2.55	H		0.166	22.20		
		64-QAM	-23.80	13.53	10.61	2.55	H		0.144	21.59		
		256-QAM	-27.05	10.28	10.61	2.55	H		0.068	18.34		
2680.0		QPSK	-24.24	13.41	10.76	2.61	H		0.143	21.56	1	0
		16-QAM	-25.20	12.45	10.76	2.61	H		0.115	20.60		
		64-QAM	-26.24	11.41	10.76	2.61	H		0.090	19.56		
		256-QAM	-29.07	8.58	10.76	2.61	H		0.047	16.73		

9.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B41
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39675 (2498.5)	4 997.00	-31.16	12.70	-54.67	3.70	V	-45.67	1	13
		-31.39		-54.90		H	-45.90		
	7 495.50	-40.21	11.14	-55.55	4.61	V	-49.02		
		-36.89		-52.23		H	-45.70		
	9 994.00	-39.24	10.89	-50.10	5.47	V	-44.68		
		-42.04		-52.90		H	-47.48		
	12 492.50	-38.79	13.83	-49.17	6.12	V	-41.46		
		-37.89		-48.27		H	-40.56		
	14 991.00	-41.46	12.80	-49.61	6.79	V	-43.60		
		-42.46		-50.61		H	-44.60		
40620 (2593.0)	5 186.00	-27.76	12.89	-51.90	3.80	V	-42.81	1	13
		-22.89		-47.03		H	-37.94		
	7 779.00	-31.42	11.75	-47.72	4.70	V	-40.67		
		-38.02		-54.32		H	-47.27		
	10 372.00	-44.17	10.75	-54.19	5.55	V	-48.99		
		-44.40		-54.42		H	-49.22		
	12 965.00	-40.10	13.28	-48.69	6.35	V	-41.76		
		-41.96		-50.55		H	-43.62		
	15 558.00	-46.40	16.17	-57.99	6.89	V	-48.71		
		-46.50		-58.09		H	-48.81		
41565 (2687.5)	5 375.00	-31.36	13.32	-56.22	3.91	V	-46.81	1	0
		-27.37		-52.23		H	-42.82		
	8 062.50	-39.92	11.20	-53.45	4.82	V	-47.07		
		-40.06		-53.59		H	-47.21		
	10 750.00	-43.44	10.85	-52.78	5.64	V	-47.57		
		-45.70		-55.04		H	-49.83		
	13 437.50	-44.76	12.72	-51.84	6.44	V	-45.56		
		-41.08		-48.16		H	-41.88		
	16 125.00	-47.23	16.78	-58.06	7.07	V	-48.35		
		-46.87		-57.70		H	-47.99		

■ MODE: LTE B41
 ■ MODULATION SIGNAL: 10 MHz QPSK
 ■ DISTANCE: 1 meters
 ■ LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39700 (2501.0)	5 002.00	-35.50	12.68	-59.26	3.71	V	-50.29	1	49
		-28.38		-52.14		H	-43.17		
	7 503.00	-40.13	11.17	-54.99	4.60	V	-48.42		
		-41.53		-56.39		H	-49.82		
	10 004.00	-41.65	10.91	-52.57	5.47	V	-47.13		
		-41.67		-52.59		H	-47.15		
	12 505.00	-41.72	13.84	-52.12	6.10	V	-44.38		
		-40.23		-50.63		H	-42.89		
	15 006.00	-44.89	12.89	-53.67	6.78	V	-47.56		
		-42.40		-51.18		H	-45.07		
40620 (2593.0)	5 186.00	-28.10	12.89	-52.24	3.80	V	-43.15	1	49
		-23.20		-47.34		H	-38.25		
	7 779.00	-37.14	11.75	-53.44	4.70	V	-46.39		
		-39.03		-55.33		H	-48.28		
	10 372.00	-45.64	10.75	-55.66	5.55	V	-50.46		
		-47.07		-57.09		H	-51.89		
	12 965.00	-42.24	13.28	-50.83	6.35	V	-43.90		
		-46.52		-55.11		H	-48.18		
	15 558.00	-48.22	16.17	-59.81	6.89	V	-50.53		
		-47.84		-59.43		H	-50.15		
41540 (2685.0)	5 370.00	-28.65	13.33	-53.63	3.92	V	-44.22	1	25
		-28.18		-53.16		H	-43.75		
	8 055.00	-38.85	11.19	-52.32	4.81	V	-45.94		
		-41.82		-55.29		H	-48.91		
	10 740.00	-43.46	10.87	-52.29	5.64	V	-47.06		
		-46.84		-55.67		H	-50.44		
	13 425.00	-43.18	12.75	-49.87	6.41	V	-43.53		
		-47.77		-54.46		H	-48.12		
	16 110.00	-47.22	16.81	-58.64	7.10	V	-48.93		
		-46.08		-57.50		H	-47.79		

MODE: LTE B41
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39725 (2503.5)	5 007.00	-37.92	12.66	-62.06	3.71	V	-53.11	1	38
		-31.88		-56.02		H	-47.07		
	7 510.50	-39.97	11.18	-54.61	4.60	V	-48.03		
		-42.45		-57.09		H	-50.51		
	10 014.00	-41.92	10.92	-52.85	5.47	V	-47.40		
		-41.78		-52.71		H	-47.26		
	12 517.50	-40.41	13.83	-50.92	6.09	V	-43.18		
		-39.06		-49.57		H	-41.83		
	15 021.00	-40.65	12.98	-49.55	6.74	V	-43.31		
		-44.48		-53.38		H	-47.14		
40620 (2593.0)	5 186.00	-29.02	12.89	-53.16	3.80	V	-44.07	1	0
		-25.58		-49.72		H	-40.63		
	7 779.00	-32.33	11.75	-48.63	4.70	V	-41.58		
		-40.51		-56.81		H	-49.76		
	10 372.00	-45.55	10.75	-55.57	5.55	V	-50.37		
		-44.99		-55.01		H	-49.81		
	12 965.00	-42.87	13.28	-51.46	6.35	V	-44.53		
		-44.34		-52.93		H	-46.00		
	15 558.00	-45.71	16.17	-57.30	6.89	V	-48.02		
		-47.68		-59.27		H	-49.99		
41515 (2682.5)	5 365.00	-29.20	13.34	-54.35	3.91	V	-44.92	1	0
		-27.08		-52.23		H	-42.80		
	8 047.50	-40.54	11.19	-53.99	4.81	V	-47.61		
		-42.91		-56.36		H	-49.98		
	10 730.00	-44.32	10.89	-52.91	5.65	V	-47.67		
		-47.69		-56.28		H	-51.04		
	13 412.50	-44.19	12.77	-50.82	6.40	V	-44.45		
		-47.97		-54.60		H	-48.23		
	16 095.00	-46.95	16.84	-58.29	7.06	V	-48.51		
		-47.07		-58.41		H	-48.63		

MODE: LTE B41
 MODULATION SIGNAL: 20 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
39750 (2506.0)	5 012.00	-35.11	12.65	-59.62	3.72	V	-50.69	1	99
		-30.62		-55.13		H	-46.20		
	7 518.00	-39.63	11.22	-54.13	4.61	V	-47.52		
		-41.36		-55.86		H	-49.25		
	10 024.00	-42.60	10.93	-53.69	5.47	V	-48.23		
		-42.92		-54.01		H	-48.55		
	12 530.00	-39.83	13.82	-50.26	6.10	V	-42.54		
		-40.64		-51.07		H	-43.35		
	15 036.00	-42.42	13.06	-51.31	6.74	V	-44.99		
		-45.07		-53.96		H	-47.64		
40620 (2593.0)	5 186.00	-28.61	12.89	-52.75	3.80	V	-43.66	1	50
		-24.00		-48.14		H	-39.05		
	7 779.00	-35.30	11.75	-51.60	4.70	V	-44.55		
		-38.89		-55.19		H	-48.14		
	10 372.00	-47.03	10.75	-57.05	5.55	V	-51.85		
		-47.07		-57.09		H	-51.89		
	12 965.00	-44.27	13.28	-52.86	6.35	V	-45.93		
		-46.27		-54.86		H	-47.93		
	15 558.00	-47.21	16.17	-58.80	6.89	V	-49.52		
		-47.73		-59.32		H	-50.04		
41490 (2680.0)	5 360.00	-28.43	13.35	-53.75	3.90	V	-44.30	1	0
		-21.72		-47.04		H	-37.59		
	8 040.00	-41.12	11.19	-54.39	4.80	V	-48.00		
		-42.74		-56.01		H	-49.62		
	10 720.00	-44.92	10.90	-53.66	5.64	V	-48.40		
		-45.75		-54.49		H	-49.23		
	13 400.00	-46.44	12.80	-53.17	6.38	V	-46.75		
		-47.99		-54.72		H	-48.30		
	16 080.00	-47.77	16.85	-59.38	7.02	V	-49.55		
		-47.25		-58.86		H	-49.03		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)	Limit (dB)
LTE B41	5 MHz	2593.0	QPSK	25	0	5.80	13.00
			16-QAM			6.81	
			64-QAM			7.00	
			256-QAM			6.80	
	10 MHz		QPSK	50		5.74	
			16-QAM			6.44	
			64-QAM			7.19	
			256-QAM			6.96	
	15 MHz		QPSK	75		5.55	
			16-QAM			6.36	
			64-QAM			6.84	
			256-QAM			6.99	
	20 MHz		QPSK	100		5.55	
			16-QAM			6.39	
			64-QAM			6.59	
			256-QAM			6.84	

Note:

1. P.A.P.R is not required. These values are reported for information only.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
LTE B41	5 MHz	2593.0	QPSK	25	0	4.5133
			16-QAM			4.5324
			64-QAM			4.5209
			256-QAM			4.5152
	10 MHz		QPSK	50		8.9835
			16-QAM			9.0077
			64-QAM			9.0036
			256-QAM			9.0025
	15 MHz		QPSK	75		13.484
			16-QAM			13.507
			64-QAM			13.503
			256-QAM			13.463
	20 MHz		QPSK	100		17.953
			16-QAM			17.972
			64-QAM			17.937
			256-QAM			17.944

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
LTE B41	5	2498.5	3.7289	31.955	-61.663	-29.708	-25.00
		2593.0	3.7488	31.955	-62.072	-30.117	
		2687.5	6.2214	32.570	-62.652	-30.082	
	10	2501.0	3.6990	31.955	-61.478	-29.523	
		2593.0	6.5205	32.570	-62.643	-30.073	
		2685.0	6.8993	32.570	-62.259	-29.689	
	15	2503.5	3.6890	31.955	-61.902	-29.947	
		2593.0	5.8724	32.570	-62.168	-29.598	
		2682.5	3.7388	31.955	-62.489	-30.534	
	20	2506.0	7.6072	32.570	-61.938	-29.368	
		2593.0	6.9492	32.570	-61.814	-29.244	
		2680.0	3.0409	31.955	-61.724	-29.769	

Note:

1. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

9.6 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1 MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-25.27	-24.88	-26.62	-27.38	-34.26	-34.34	-34.03
10 MHz	2501.0	QPSK	50/0	-29.40	-29.13	-28.36	-29.33	-29.89	-30.29	-36.51
15 MHz	2503.5	QPSK	75/0	-31.20	-31.36	-29.75	-30.96	-31.82	-32.17	-38.66
20 MHz	2506.0	QPSK	100/0	-31.70	-32.31	-30.67	-31.91	-32.91	-33.14	-39.26
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-24.38	-24.00	-23.50	-24.01
	2687.5	QPSK	25	0	-24.01	-23.88	-21.66	-22.03
10 MHz	2593.0	QPSK	50	0	-27.92	-27.79	-25.24	-25.98
	2685.0	QPSK	50	0	-27.65	-26.79	-24.37	-24.09
15 MHz	2593.0	QPSK	75	0	-29.21	-29.40	-26.83	-27.54
	2682.5	QPSK	75	0	-28.95	-28.48	-26.07	-25.50
20 MHz	2593.0	QPSK	100	0	-29.68	-29.91	-27.80	-28.54
	2680.0	QPSK	100	0	-29.03	-28.84	-26.94	-26.65
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-31.90	-31.92	-32.43	-32.13
	2687.5	QPSK	25	0	-31.25	-30.14	-31.89	-30.40
10 MHz	2593.0	QPSK	50	0	-27.19	-27.40	-34.74	-34.31
	2685.0	QPSK	50	0	-27.16	-25.85	-34.16	-32.07
15 MHz	2593.0	QPSK	75	0	-28.98	-29.13	-37.12	-36.44
	2682.5	QPSK	75	0	-28.81	-27.36	-36.17	-34.50
20 MHz	2593.0	QPSK	100	0	-29.86	-30.17	-38.04	-37.39
	2680.0	QPSK	100	0	-29.26	-28.16	-36.46	-35.86
Limit(dBm)					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. RB = Resource Block
5. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 3.979

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2498,500,000 Hz</u>
BANDWIDTH:	<u>39675 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2498 500 006	0.0	0.000 000	0.000
100 %		-30	2498 500 011	4.5	0.000 000	0.002
100 %		-20	2498 500 009	2.4	0.000 000	0.001
100 %		-10	2498 500 014	7.8	0.000 000	0.003
100 %		0	2498 500 013	6.7	0.000 000	0.003
100 %		+10	2498 500 013	6.6	0.000 000	0.003
100 %		+30	2498 500 013	6.1	0.000 000	0.002
100 %		+40	2498 500 010	3.2	0.000 000	0.001
100 %		+50	2498 500 010	3.5	0.000 000	0.001
Batt. Endpoint	3.300	+20	2498 500 014	7.4	0.000 000	0.003

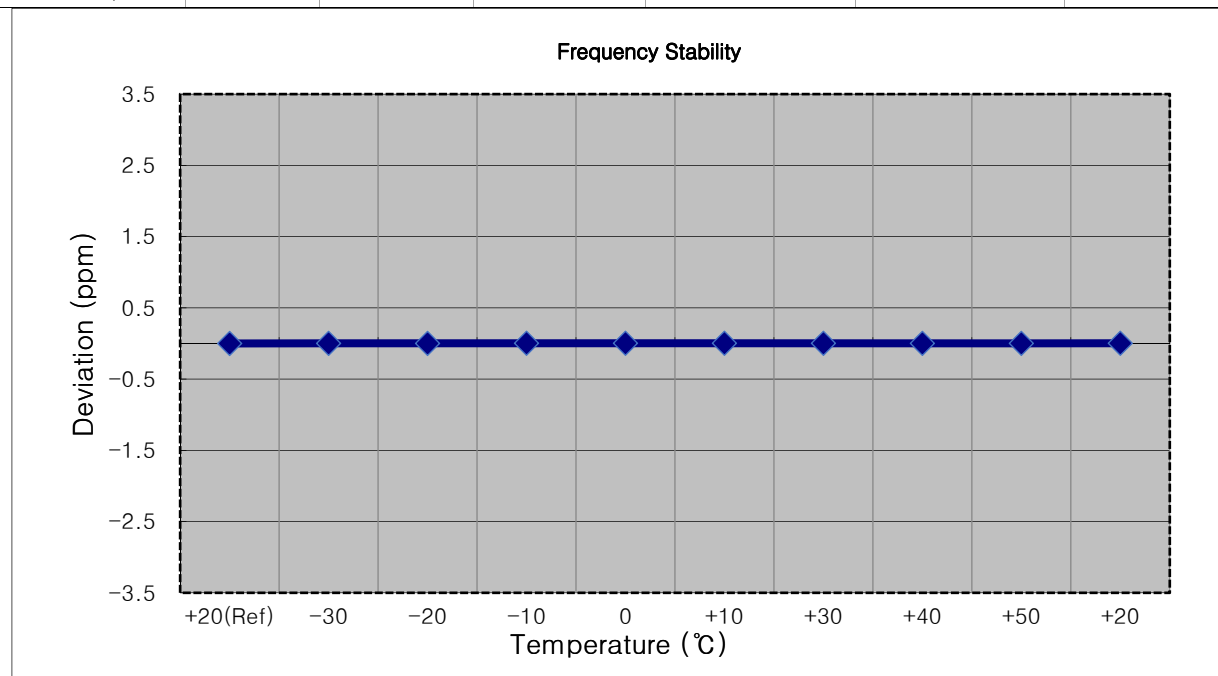


☐ MODE: LTE B41
☐ OPERATING FREQUENCY: 2501,000,000 Hz
☐ BANDWIDTH: 39700 (10 MHz)
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2501 000 005	0.0	0.000 000	0.000
100 %		-30	2501 000 010	5.0	0.000 000	0.002
100 %		-20	2501 000 012	6.9	0.000 000	0.003
100 %		-10	2501 000 008	3.3	0.000 000	0.001
100 %		0	2501 000 012	7.6	0.000 000	0.003
100 %		+10	2501 000 011	6.0	0.000 000	0.002
100 %		+30	2501 000 008	3.3	0.000 000	0.001
100 %		+40	2501 000 012	7.3	0.000 000	0.003
100 %		+50	2501 000 010	5.6	0.000 000	0.002
Batt. Endpoint	3.300	+20	2501 000 009	4.7	0.000 000	0.002

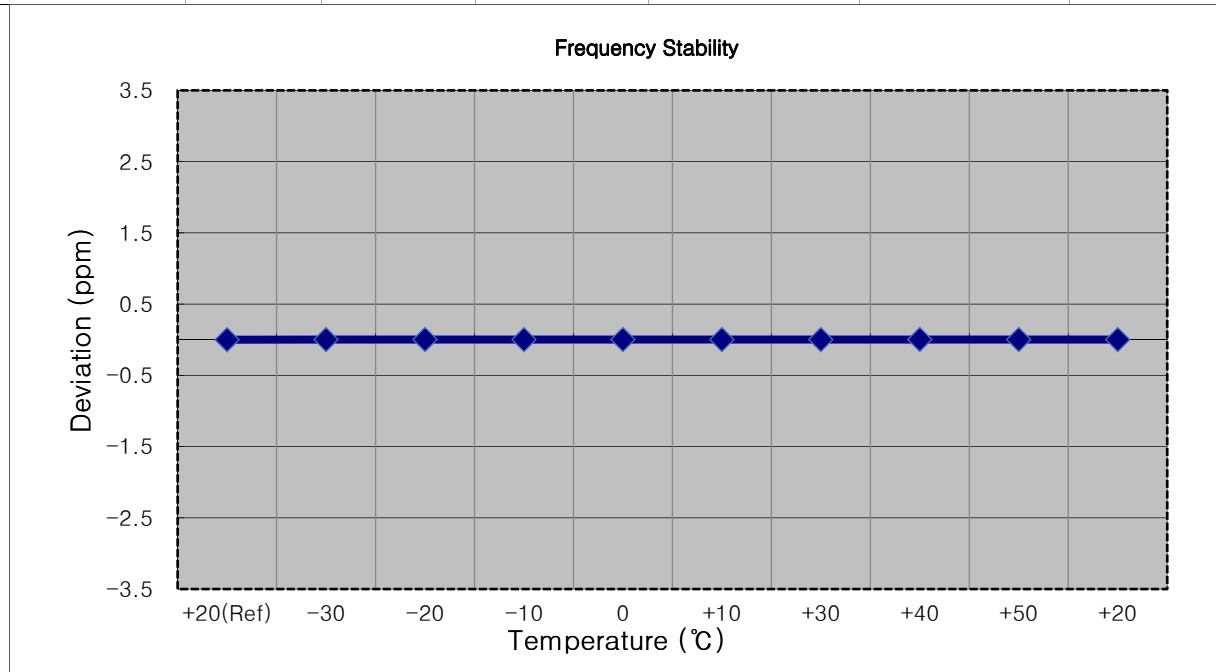


- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2503 500 006	0.0	0.000 000	0.000
100 %		-30	2503 500 008	1.9	0.000 000	0.001
100 %		-20	2503 500 011	4.8	0.000 000	0.002
100 %		-10	2503 500 013	6.9	0.000 000	0.003
100 %		0	2503 500 010	3.7	0.000 000	0.001
100 %		+10	2503 500 010	4.1	0.000 000	0.002
100 %		+30	2503 500 010	4.0	0.000 000	0.002
100 %		+40	2503 500 008	2.2	0.000 000	0.001
100 %		+50	2503 500 012	6.4	0.000 000	0.003
Batt. Endpoint	3.300	+20	2503 500 009	3.1	0.000 000	0.001

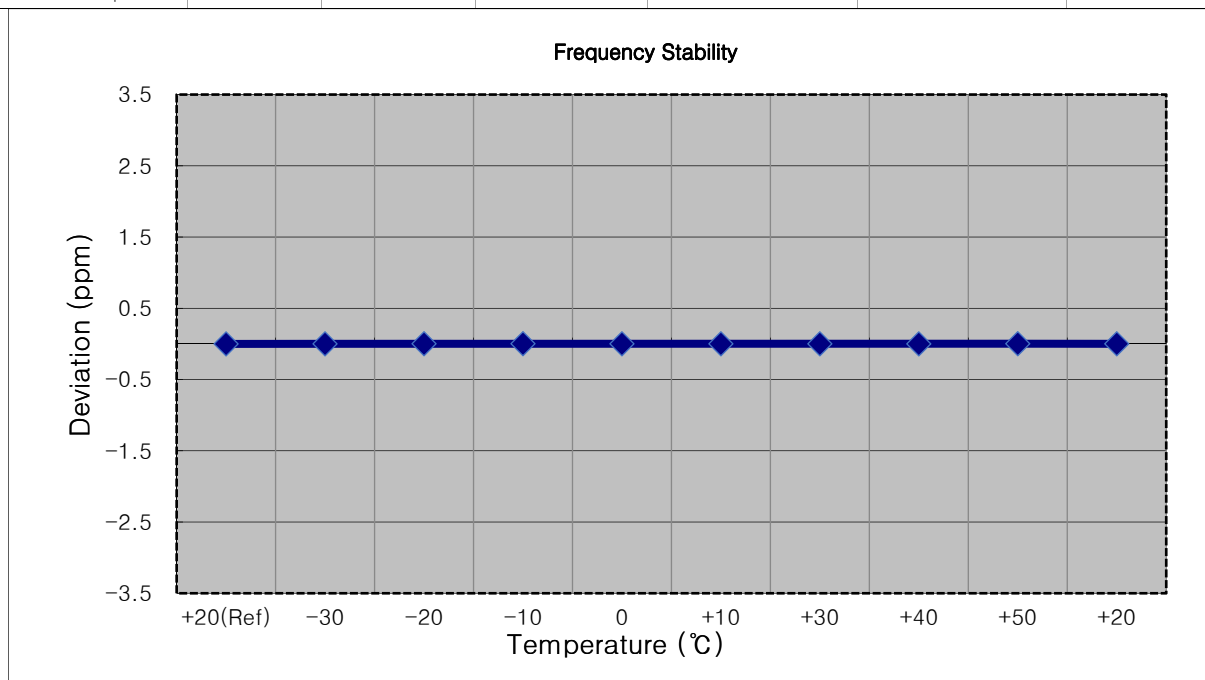


- MODE: LTE B41
- OPERATING FREQUENCY: 2506,000,000 Hz
- BANDWIDTH: 39750 (20 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2506 000 004	0.0	0.000 000	0.000
100 %		-30	2506 000 007	2.3	0.000 000	0.001
100 %		-20	2506 000 008	3.7	0.000 000	0.001
100 %		-10	2506 000 009	4.8	0.000 000	0.002
100 %		0	2506 000 010	5.6	0.000 000	0.002
100 %		+10	2506 000 010	5.1	0.000 000	0.002
100 %		+30	2506 000 008	3.5	0.000 000	0.001
100 %		+40	2506 000 007	2.6	0.000 000	0.001
100 %		+50	2506 000 009	4.2	0.000 000	0.002
Batt. Endpoint	3.300	+20	2506 000 008	3.2	0.000 000	0.001

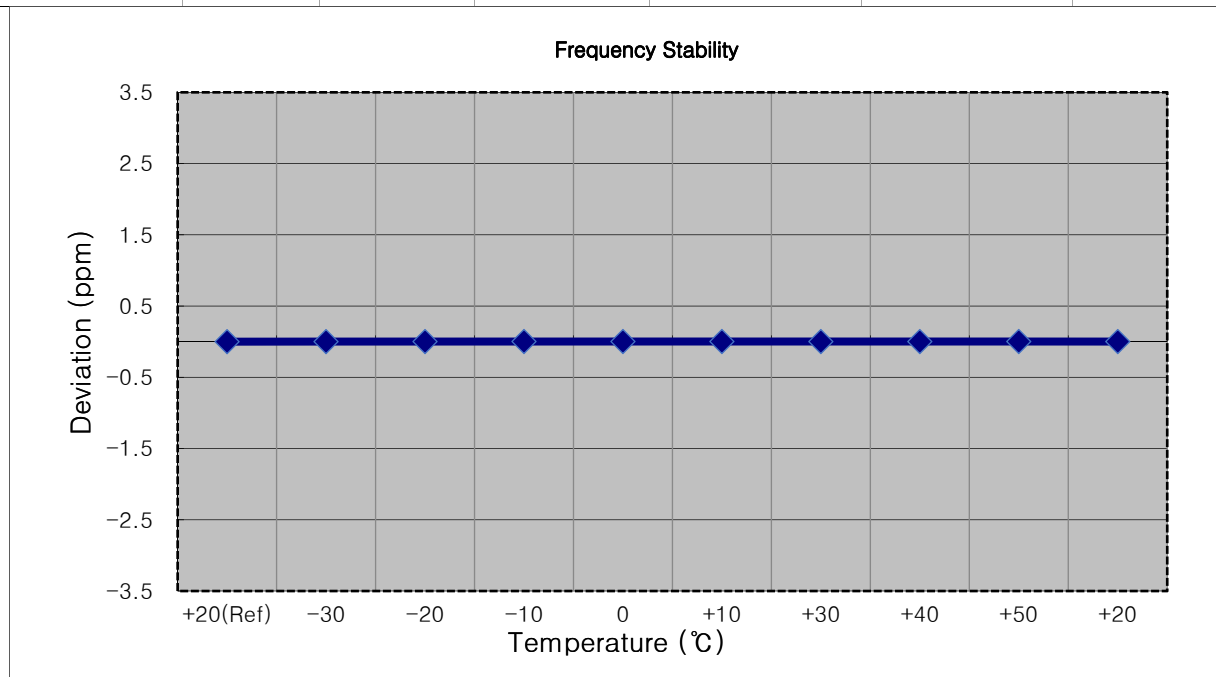


■ **MODE:** LTE B41
 ■ **OPERATING FREQUENCY:** 2593,000,000 Hz
 ■ **BANDWIDTH:** 40620 (5 MHz)
 ■ **REFERENCE VOLTAGE:** 3.880 VDC
 ■ **DEVIATION LIMIT:** Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2593 000 003	0.0	0.000 000	0.000
100 %		-30	2592 999 999	-4.1	0.000 000	-0.002
100 %		-20	2593 000 007	4.3	0.000 000	0.002
100 %		-10	2593 000 008	5.3	0.000 000	0.002
100 %		0	2592 999 999	-3.9	0.000 000	-0.002
100 %		+10	2593 000 007	3.6	0.000 000	0.001
100 %		+30	2593 000 001	-1.5	0.000 000	-0.001
100 %		+40	2592 999 998	-4.6	0.000 000	-0.002
100 %		+50	2593 000 008	4.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	2593 000 006	3.4	0.000 000	0.001

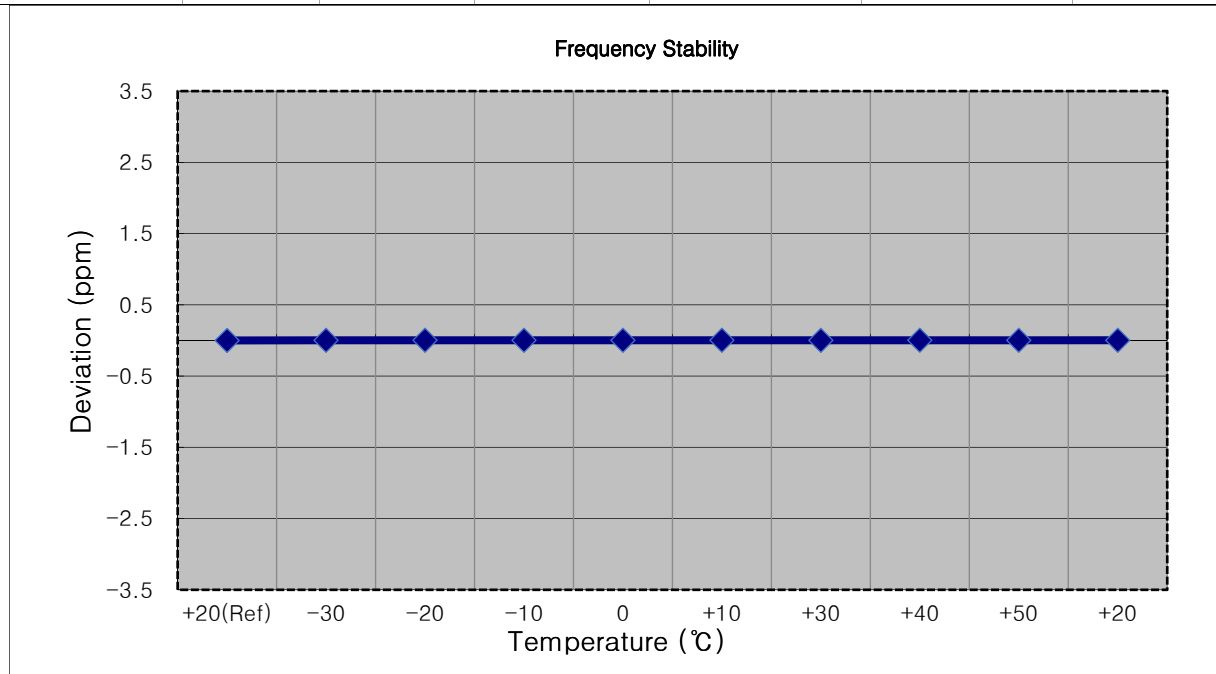


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
BANDWIDTH:	<u>40620 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2592 999 995	0.0	0.000 000	0.000
100 %		-30	2592 999 992	-2.6	0.000 000	-0.001
100 %		-20	2592 999 989	-5.8	0.000 000	-0.002
100 %		-10	2592 999 991	-4.4	0.000 000	-0.002
100 %		0	2592 999 993	-2.2	0.000 000	-0.001
100 %		+10	2592 999 998	3.3	0.000 000	0.001
100 %		+30	2592 999 990	-4.6	0.000 000	-0.002
100 %		+40	2592 999 999	4.3	0.000 000	0.002
100 %		+50	2592 999 990	-5.1	0.000 000	-0.002
Batt. Endpoint	3.300	+20	2592 999 993	-2.4	0.000 000	-0.001

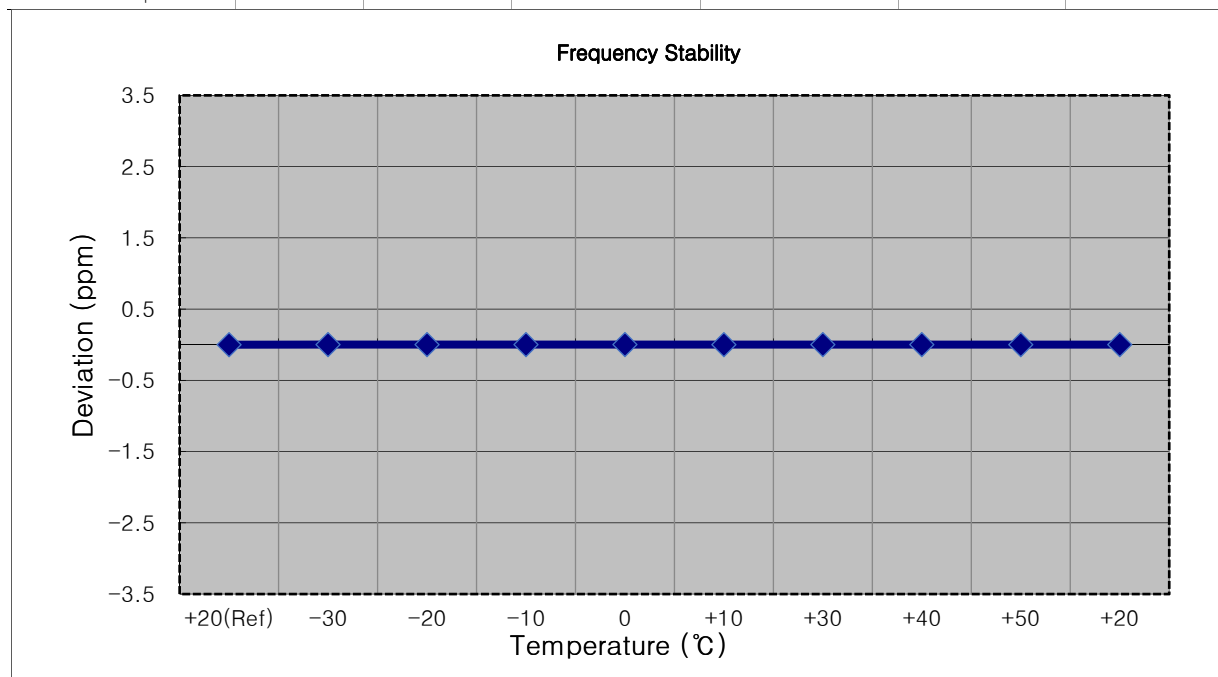


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
BANDWIDTH:	<u>40620 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2592 999 997	0.0	0.000 000	0.000
100 %		-30	2592 999 993	-4.2	0.000 000	-0.002
100 %		-20	2592 999 994	-3.0	0.000 000	-0.001
100 %		-10	2592 999 994	-2.9	0.000 000	-0.001
100 %		0	2592 999 993	-4.4	0.000 000	-0.002
100 %		+10	2592 999 994	-2.6	0.000 000	-0.001
100 %		+30	2592 999 995	-1.6	0.000 000	-0.001
100 %		+40	2592 999 991	-6.4	0.000 000	-0.002
100 %		+50	2592 999 991	-6.1	0.000 000	-0.002
Batt. Endpoint	3.300	+20	2592 999 992	-5.5	0.000 000	-0.002

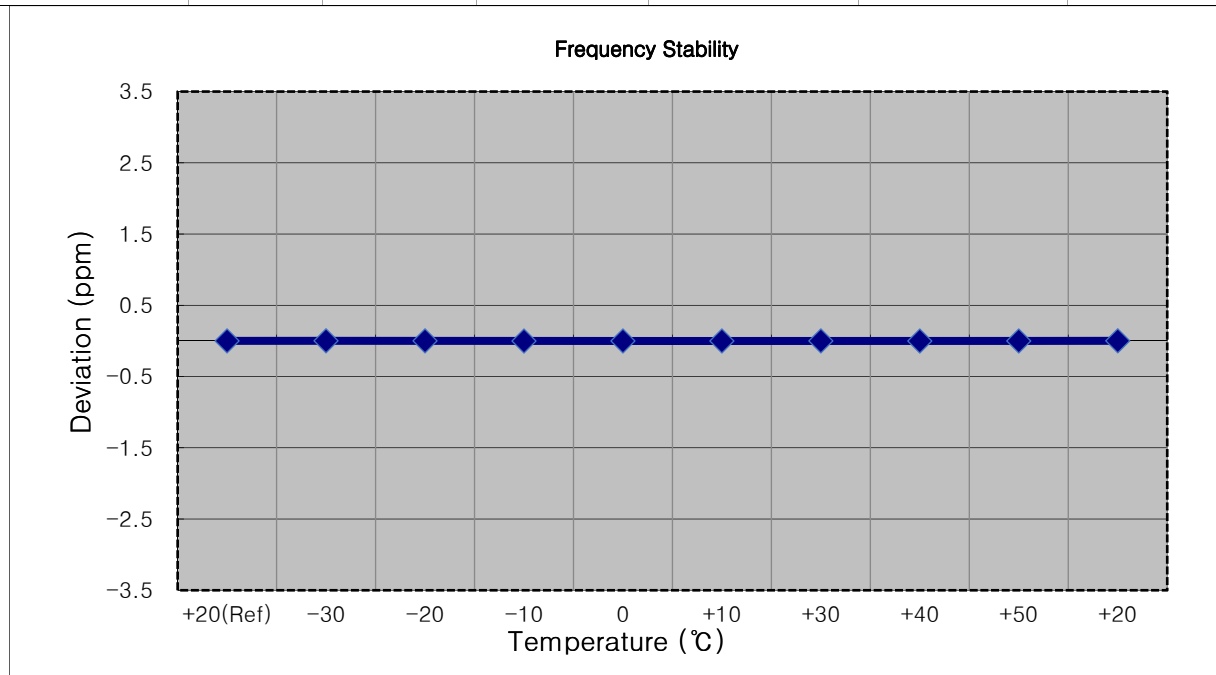


- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2592 999 998	0.0	0.000 000	0.000
100 %		-30	2592 999 995	-2.8	0.000 000	-0.001
100 %		-20	2592 999 993	-4.3	0.000 000	-0.002
100 %		-10	2592 999 993	-4.2	0.000 000	-0.002
100 %		0	2592 999 992	-6.0	0.000 000	-0.002
100 %		+10	2592 999 994	-3.1	0.000 000	-0.001
100 %		+30	2592 999 993	-4.6	0.000 000	-0.002
100 %		+40	2592 999 994	-3.2	0.000 000	-0.001
100 %		+50	2592 999 993	-4.7	0.000 000	-0.002
Batt. Endpoint	3.300	+20	2592 999 996	-1.9	0.000 000	-0.001

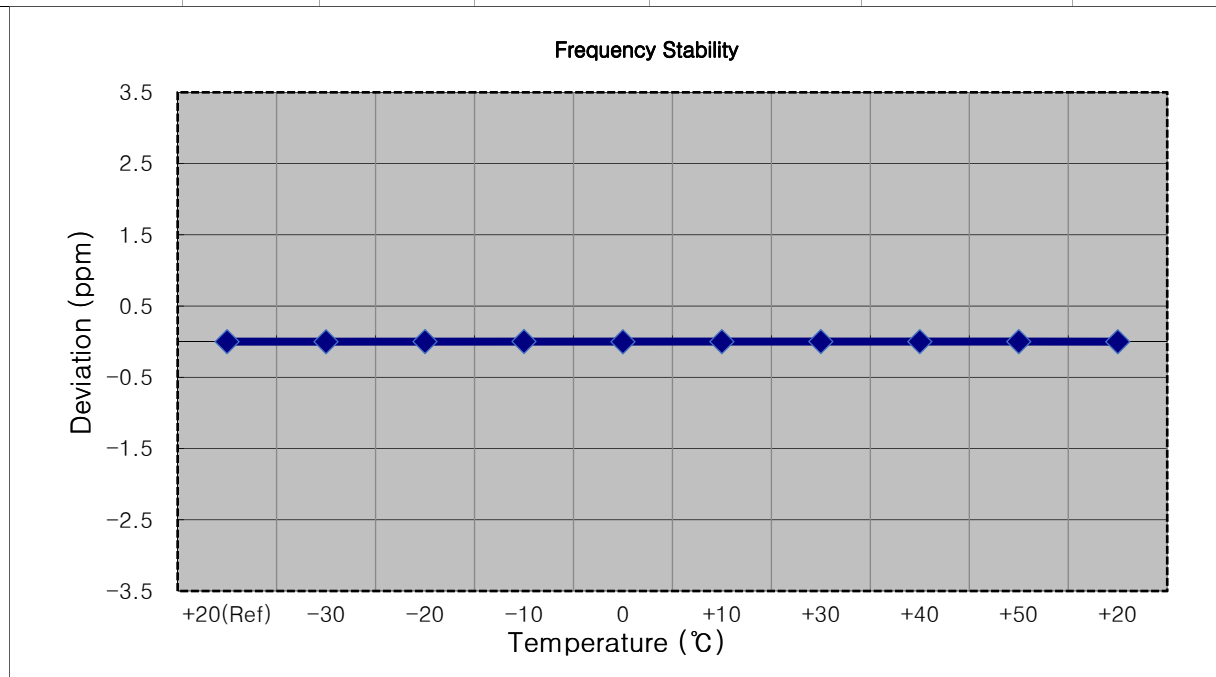


MODE:	<u>LTE B41</u>
OPERATING FREQUENCY:	<u>2687,500,000 Hz</u>
BANDWIDTH:	<u>41565 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2687 500 005	0.0	0.000 000	0.000
100 %		-30	2687 500 000	-4.6	0.000 000	-0.002
100 %		-20	2687 500 009	3.9	0.000 000	0.001
100 %		-10	2687 500 008	3.4	0.000 000	0.001
100 %		0	2687 499 999	-5.7	0.000 000	-0.002
100 %		+10	2687 500 008	2.6	0.000 000	0.001
100 %		+30	2687 500 009	4.3	0.000 000	0.002
100 %		+40	2687 500 009	3.8	0.000 000	0.001
100 %		+50	2687 500 008	3.1	0.000 000	0.001
Batt. Endpoint	3.300	+20	2687 500 009	4.4	0.000 000	0.002

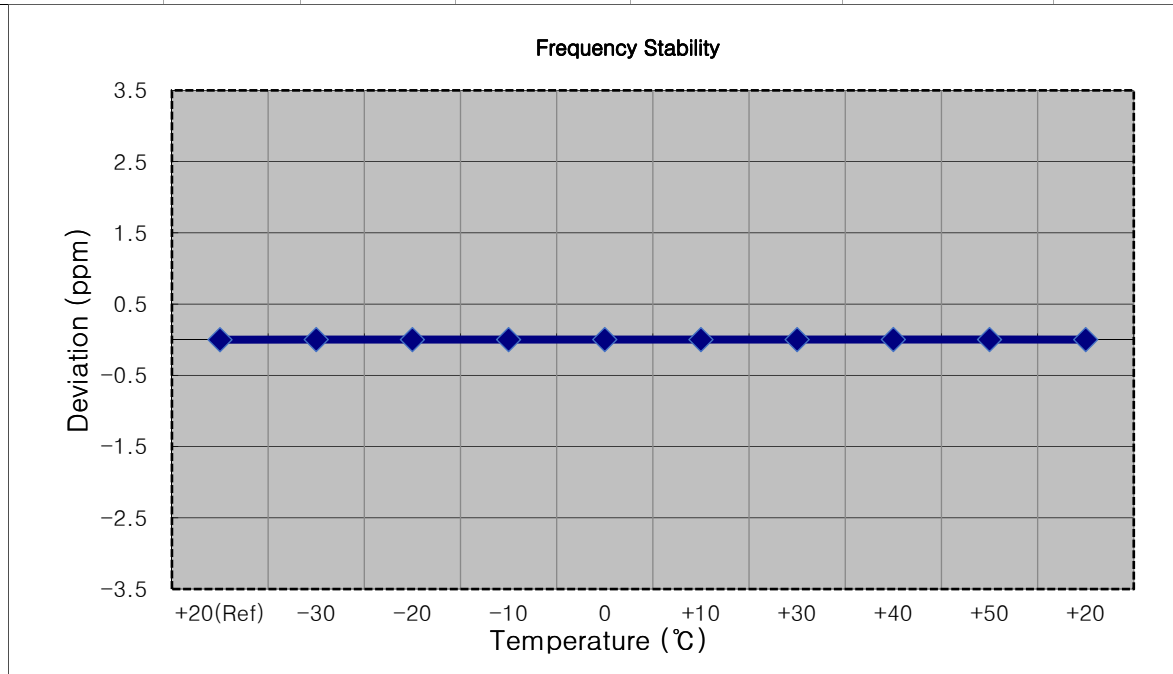


MODE: LTE B41
 OPERATING FREQUENCY: 2685,000,000 Hz
 BANDWIDTH: 41540 (10 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2684 999 996	0.0	0.000 000	0.000
100 %		-30	2684 999 992	-3.9	0.000 000	-0.001
100 %		-20	2685 000 000	3.7	0.000 000	0.001
100 %		-10	2684 999 995	-1.6	0.000 000	-0.001
100 %		0	2684 999 998	2.2	0.000 000	0.001
100 %		+10	2685 000 001	4.7	0.000 000	0.002
100 %		+30	2685 000 000	4.2	0.000 000	0.002
100 %		+40	2684 999 995	-1.2	0.000 000	0.000
100 %		+50	2684 999 993	-3.3	0.000 000	-0.001
Batt. Endpoint	3.300	+20	2684 999 999	3.0	0.000 000	0.001

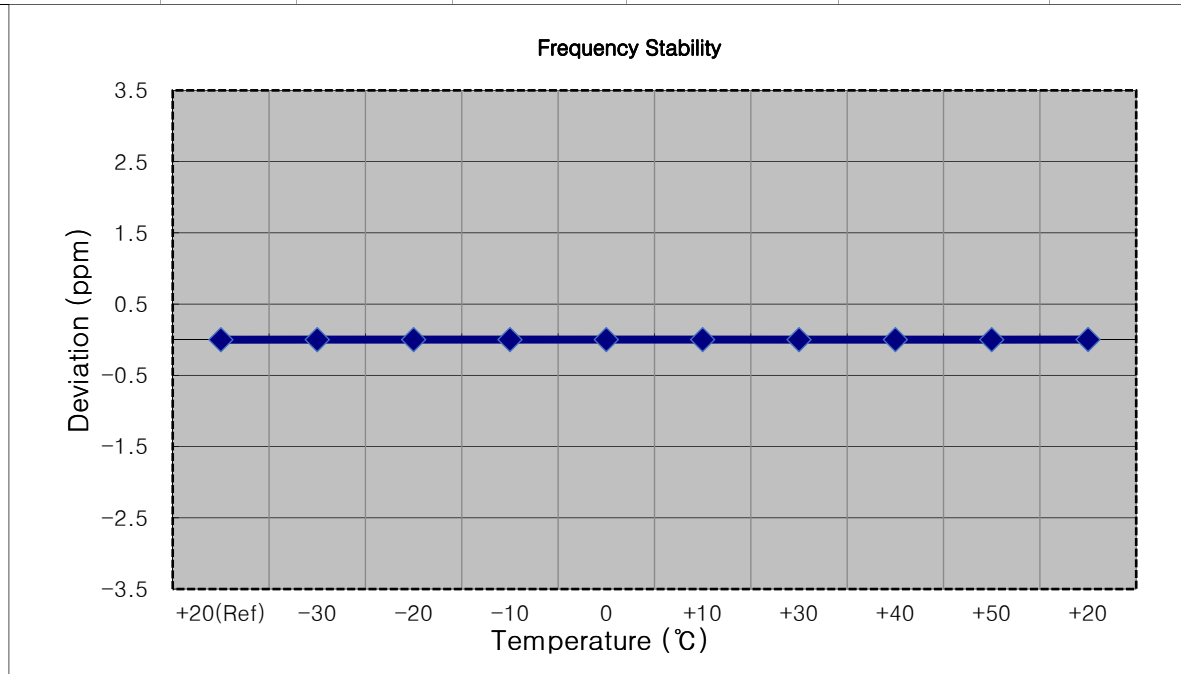


- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2682 499 997	0.0	0.000 000	0.000
100 %		-30	2682 500 001	3.7	0.000 000	0.001
100 %		-20	2682 499 995	-2.5	0.000 000	-0.001
100 %		-10	2682 499 993	-4.6	0.000 000	-0.002
100 %		0	2682 499 999	1.7	0.000 000	0.001
100 %		+10	2682 499 995	-2.2	0.000 000	-0.001
100 %		+30	2682 499 991	-6.7	0.000 000	-0.002
100 %		+40	2682 499 993	-4.2	0.000 000	-0.002
100 %		+50	2682 499 995	-2.5	0.000 000	-0.001
Batt. Endpoint	3.300	+20	2682 499 993	-4.1	0.000 000	-0.002

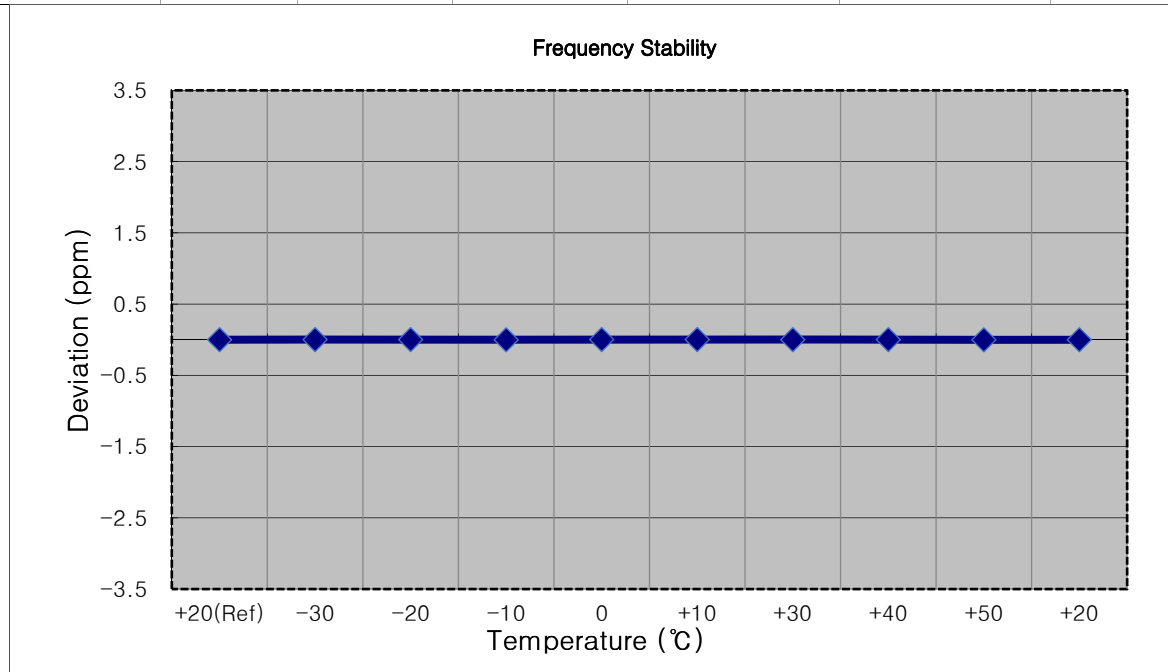

- ▣ MODE: LTE B41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	2679 999 996	0.0	0.000 000	0.000
100 %		-30	2679 999 994	-2.7	0.000 000	-0.001
100 %		-20	2679 999 999	2.9	0.000 000	0.001
100 %		-10	2679 999 993	-3.5	0.000 000	-0.001
100 %		0	2679 999 995	-1.7	0.000 000	-0.001
100 %		+10	2679 999 992	-4.4	0.000 000	-0.002
100 %		+30	2679 999 992	-4.0	0.000 000	-0.001
100 %		+40	2679 999 994	-2.5	0.000 000	-0.001
100 %		+50	2679 999 993	-3.1	0.000 000	-0.001
Batt. Endpoint	3.300	+20	2679 999 994	-2.9	0.000 000	-0.001

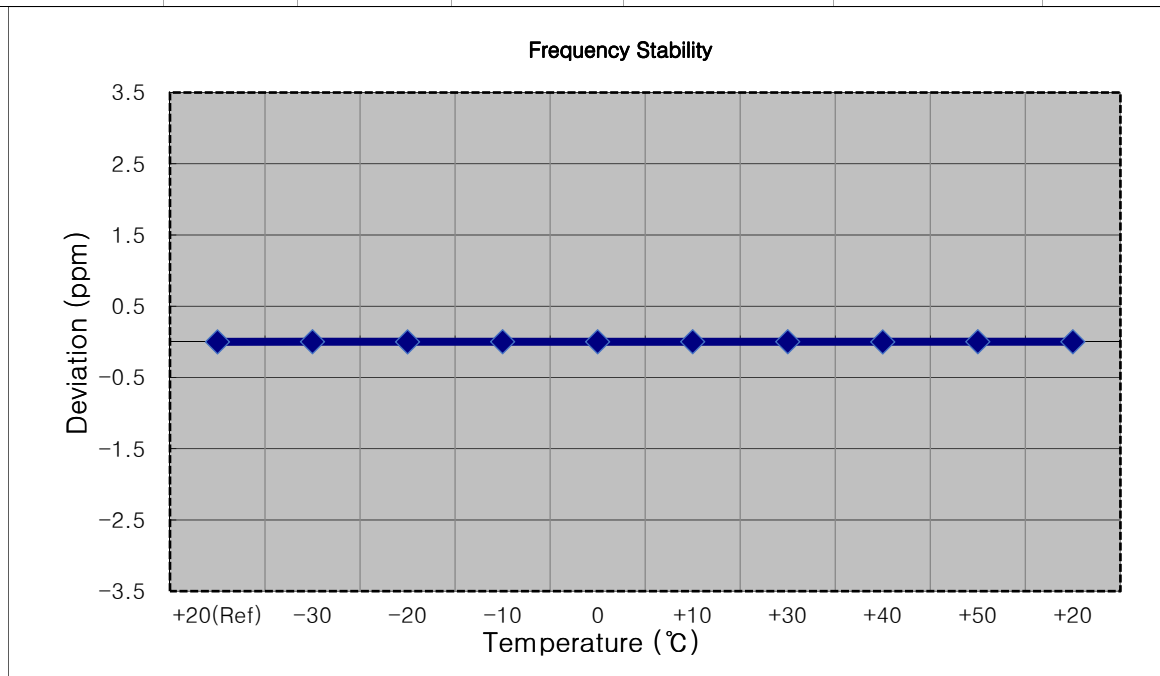


10. TEST PLOTS(Main 1 ANT)

10.1 PEAK-TO-AVERAGE RATIO


LTE B41_5 M_PAR_Mid_QPSK_FullRB

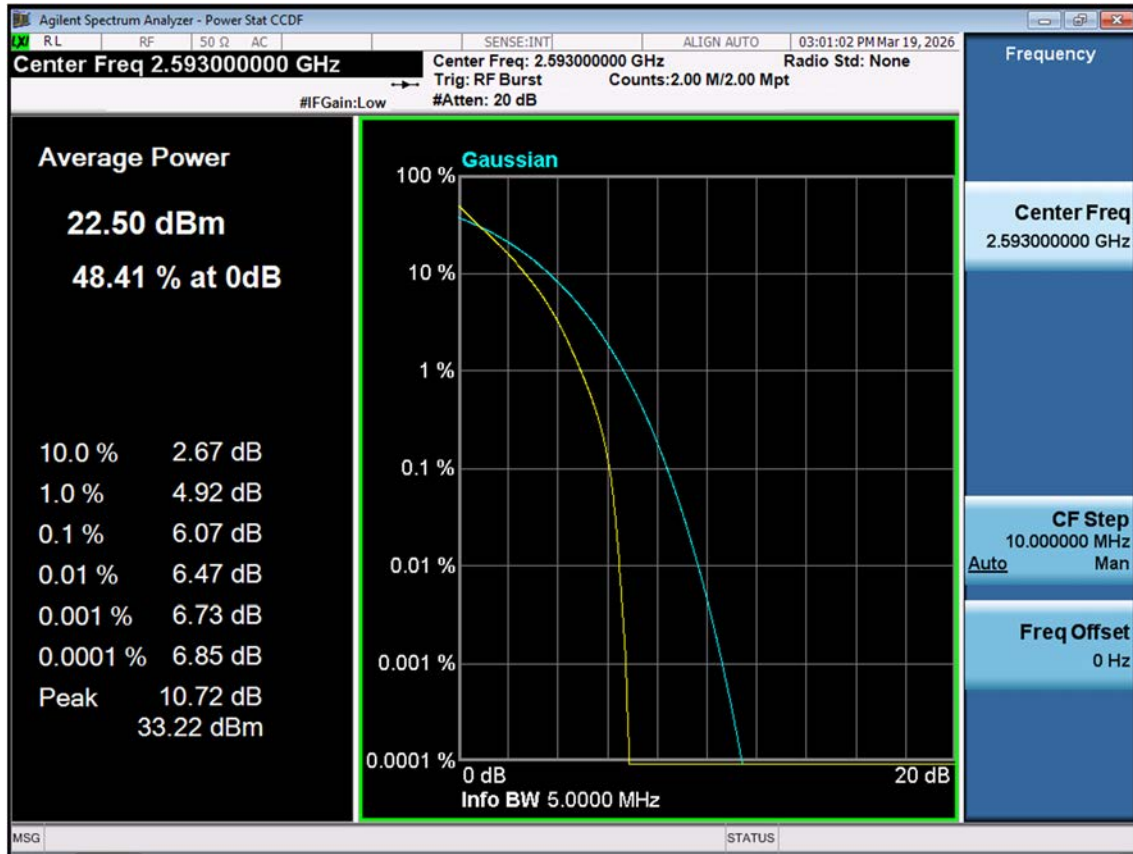


LTE B41_5 M_PAR_Mid_16QAM_FullRB

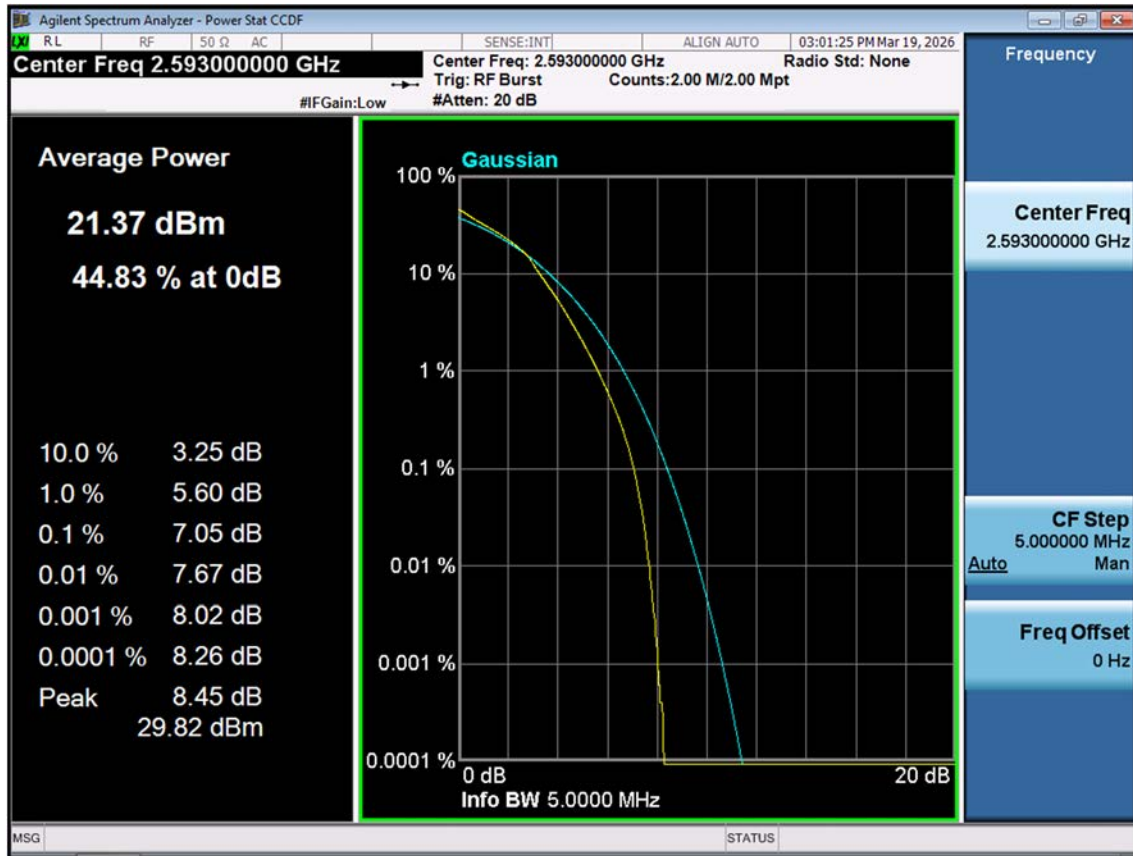


LTE B41_5 M_PAR_Mid_64QAM_FullRB

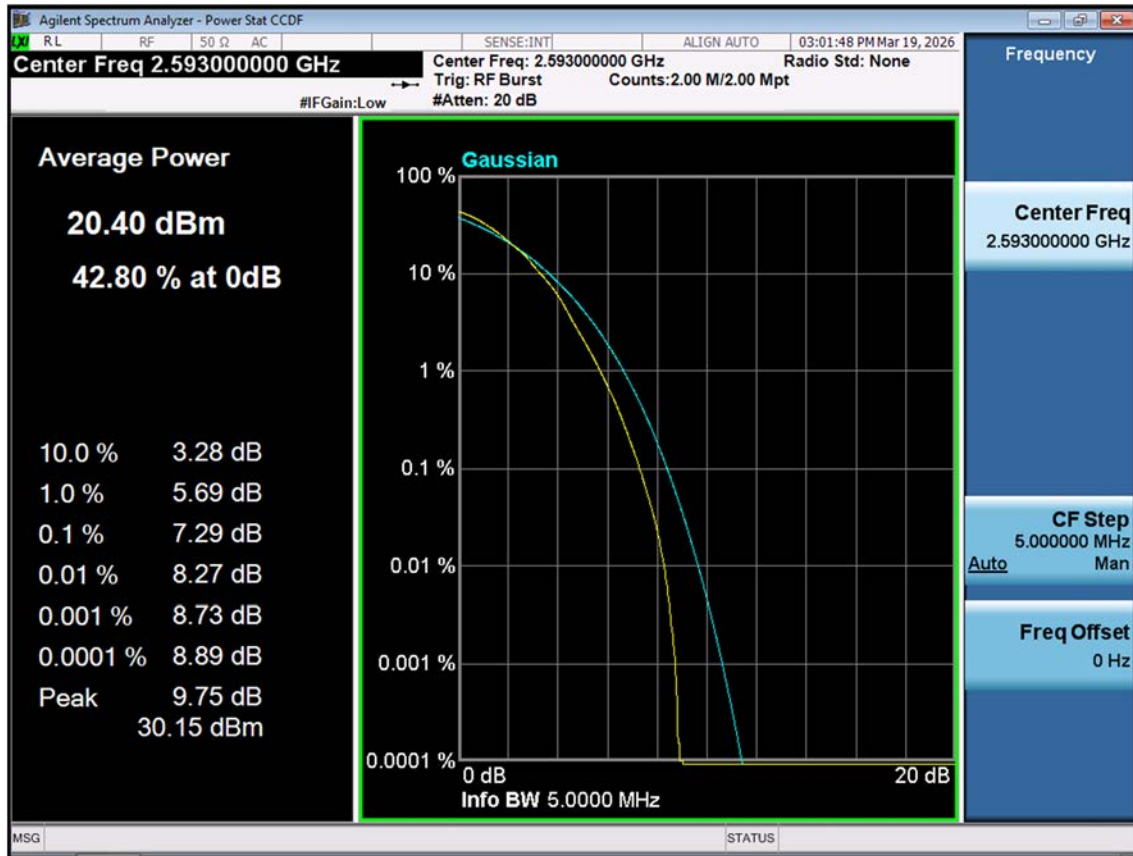


LTE B41_5 M_PAR_Mid_256QAM_FullRB

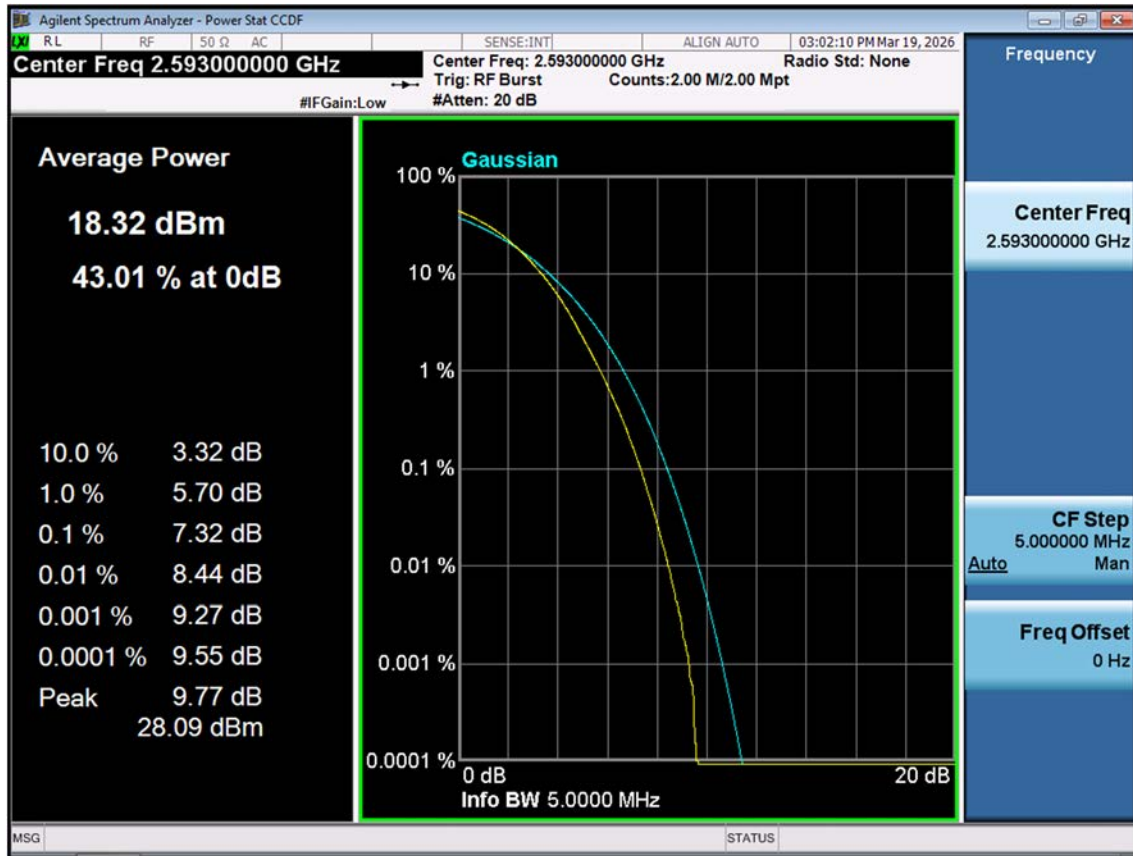


LTE B41_10 M_PAR_Mid_QPSK_FullRB

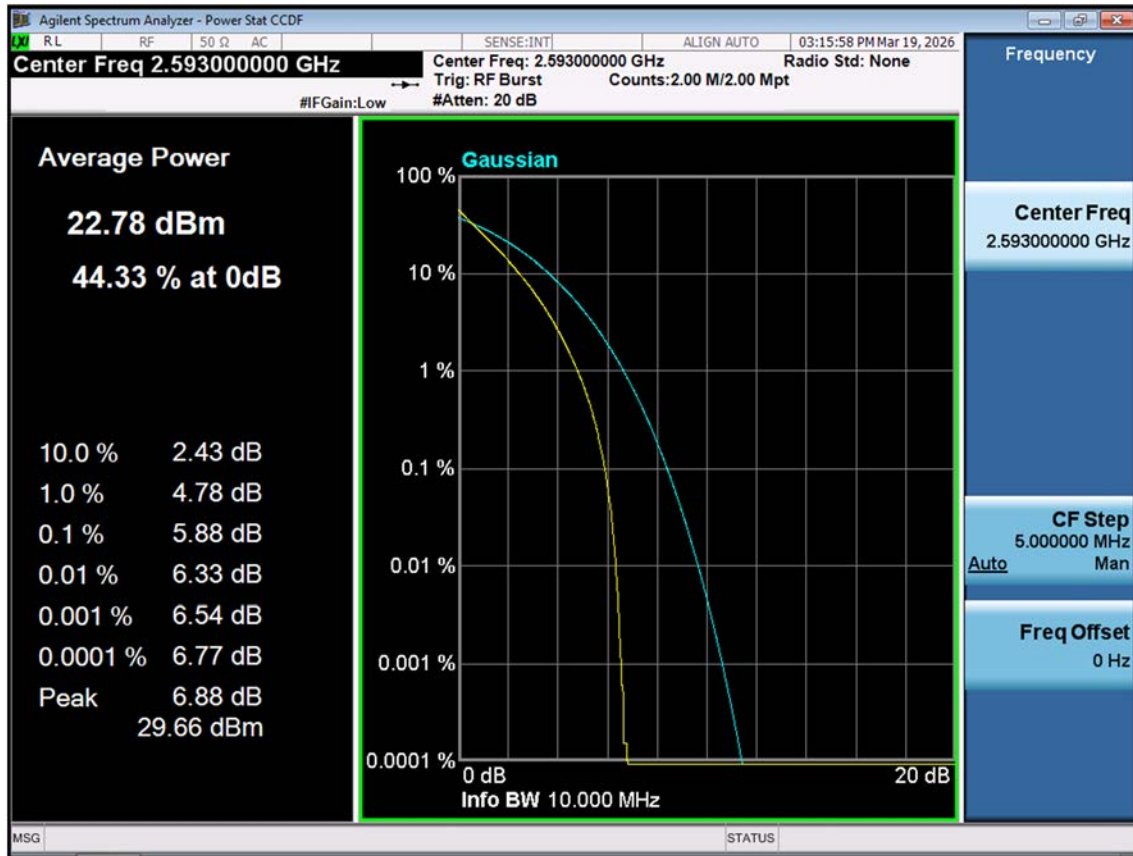


LTE B41_10 M_PAR_Mid_16QAM_FullRB

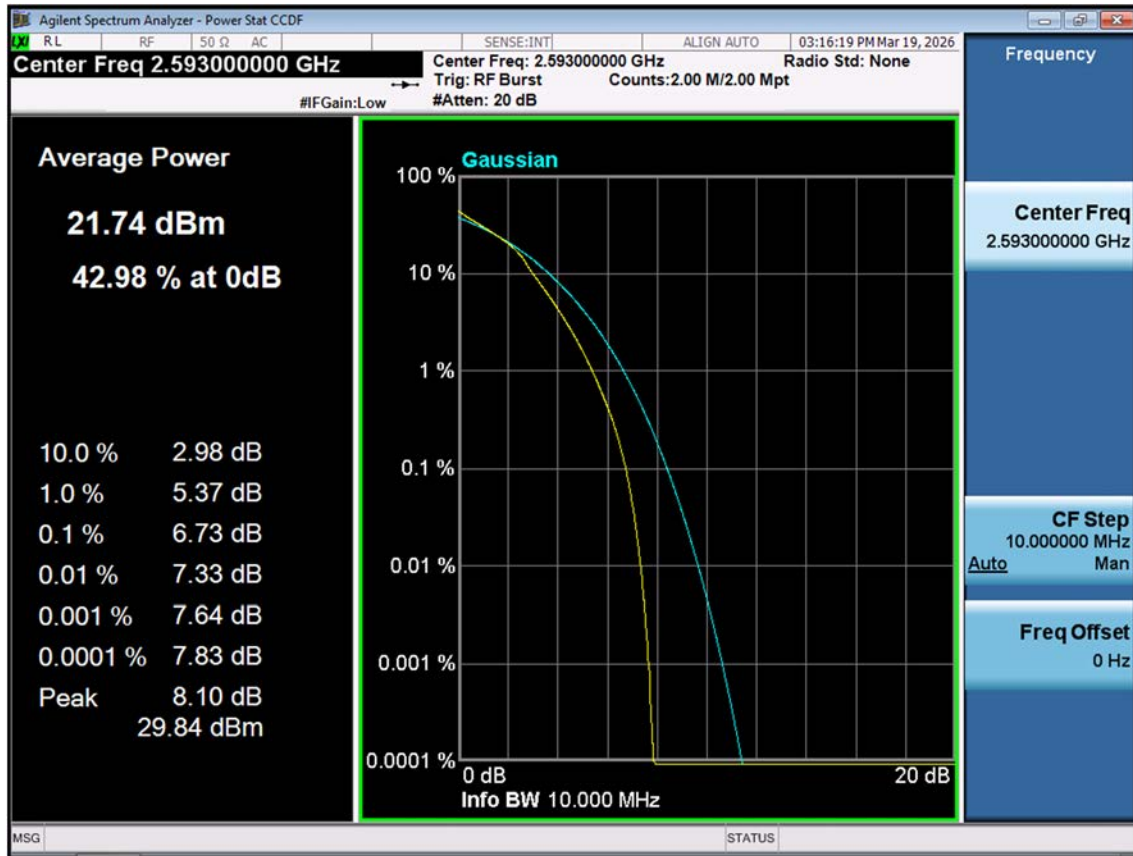


LTE B41_10 M_PAR_Mid_64QAM_FullRB

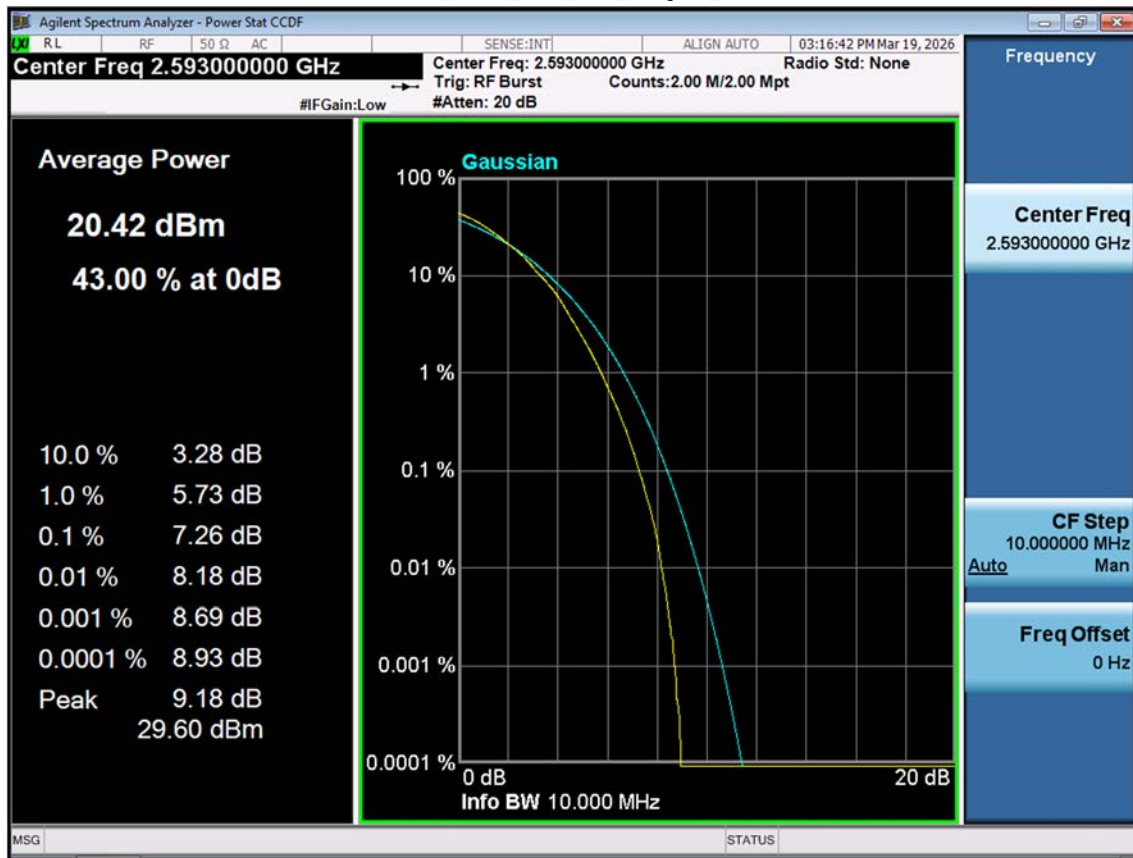


LTE B41_10 M_PAR_Mid_256QAM_FullRB

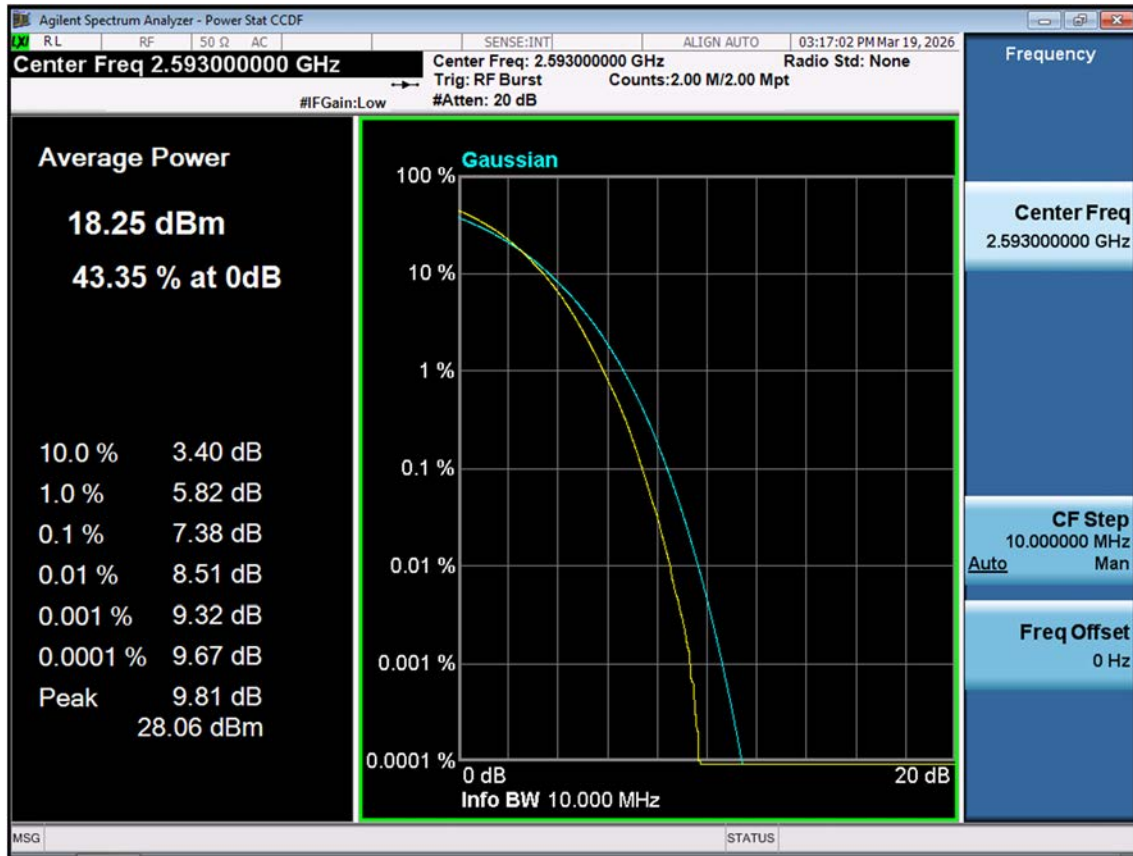


LTE B41_15 M_PAR_Mid_QPSK_FullRB

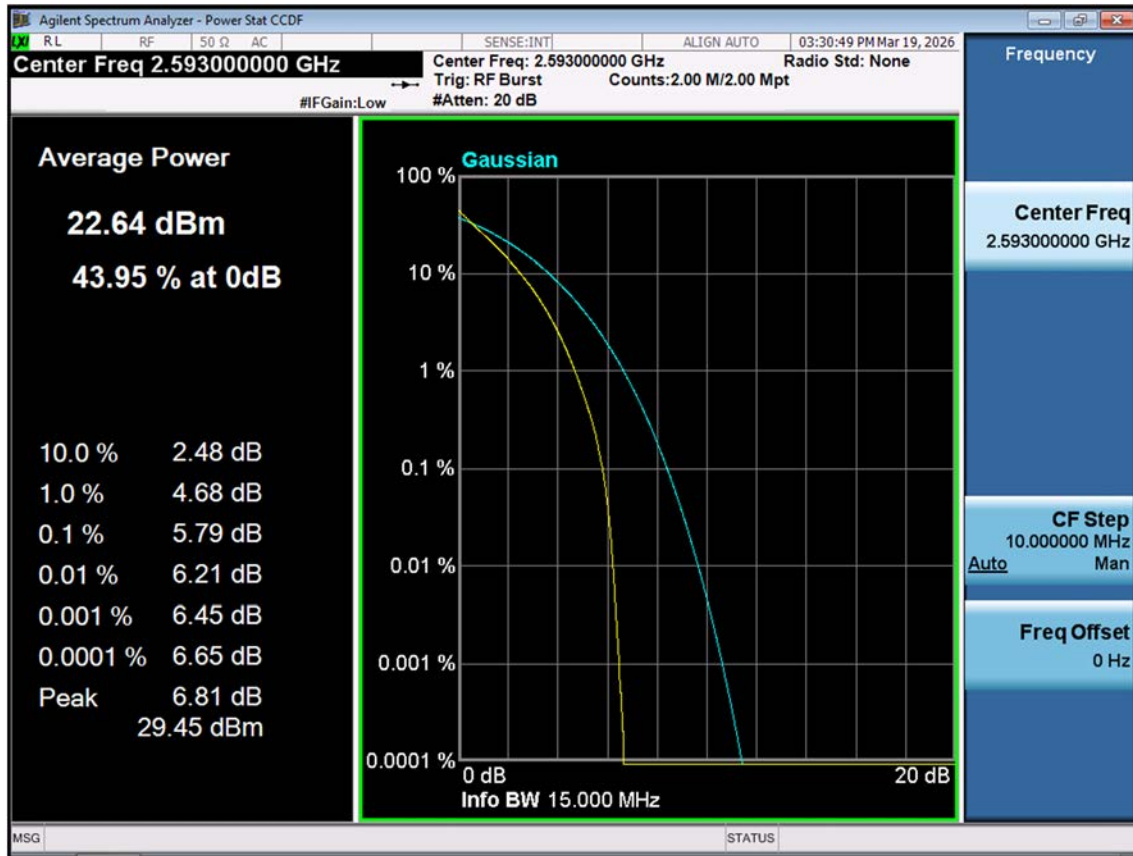


LTE B41_15 M_PAR_Mid_16QAM_FullRB

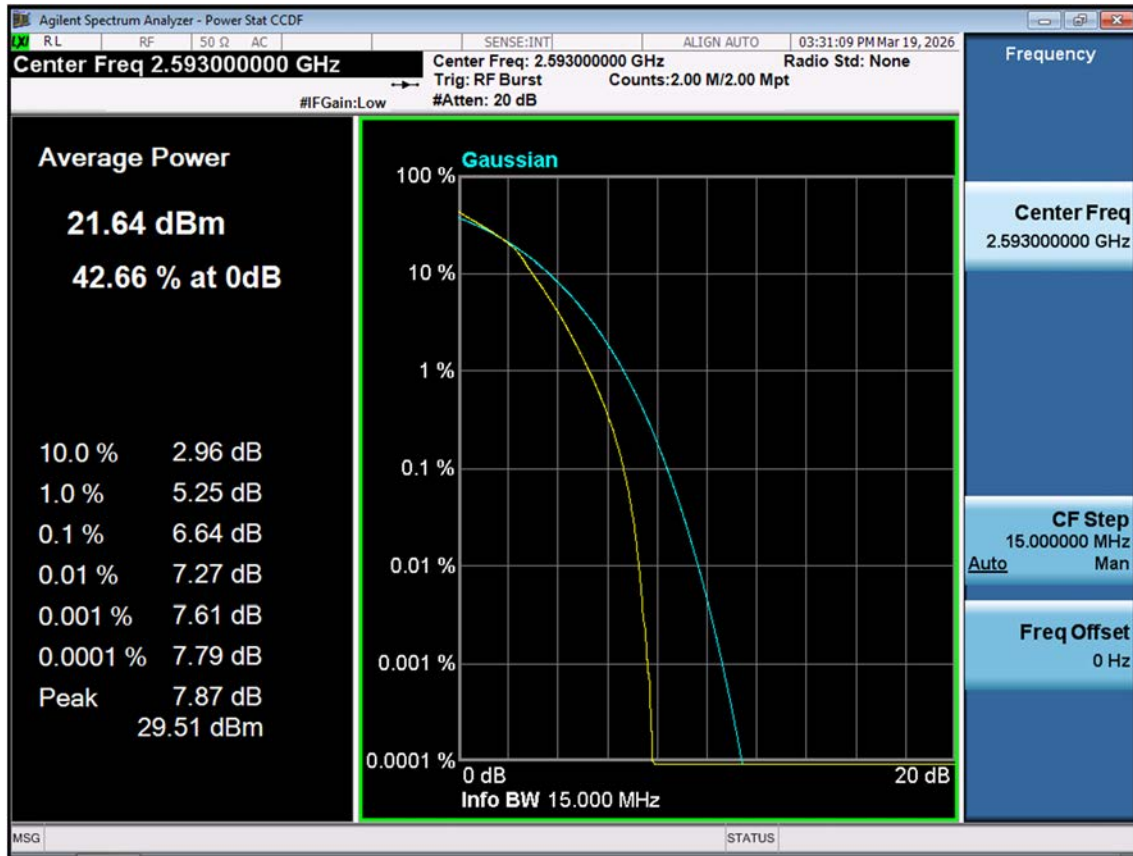


LTE B41_15 M_PAR_Mid_64QAM_FullRB

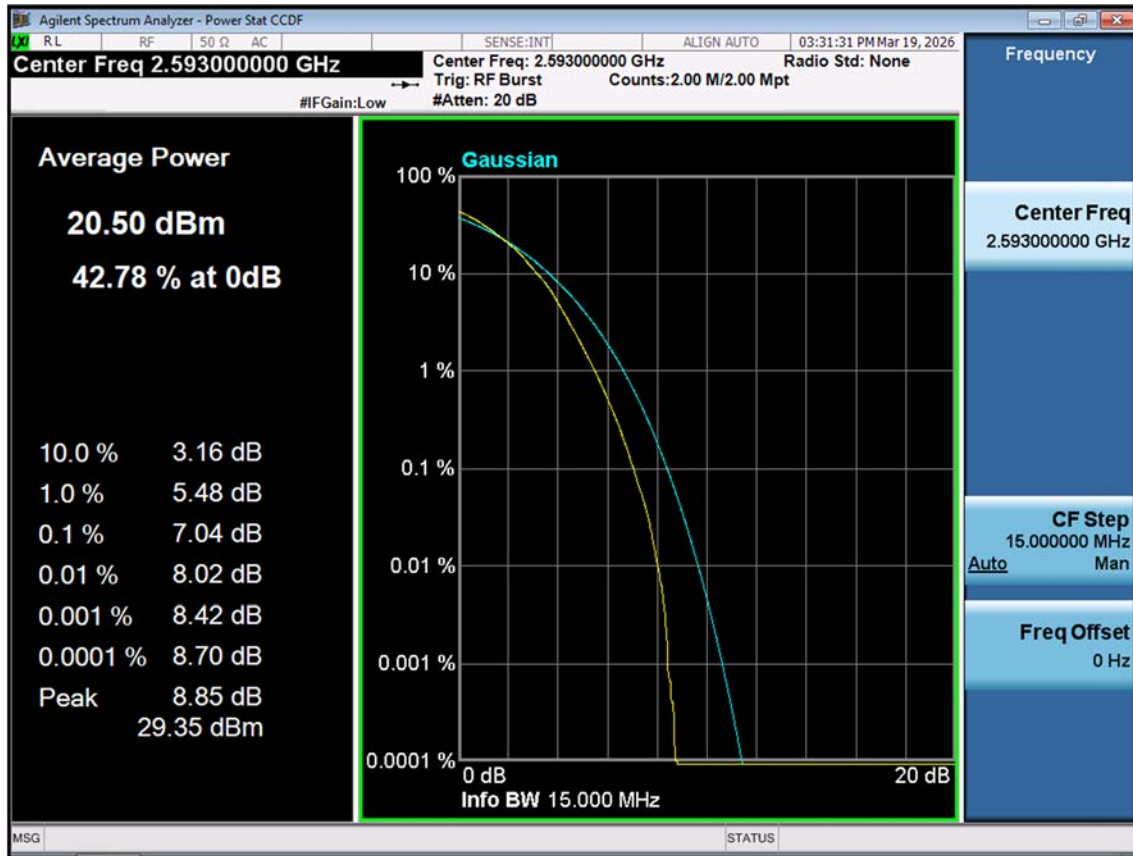


LTE B41_15 M_PAR_Mid_256QAM_FullRB

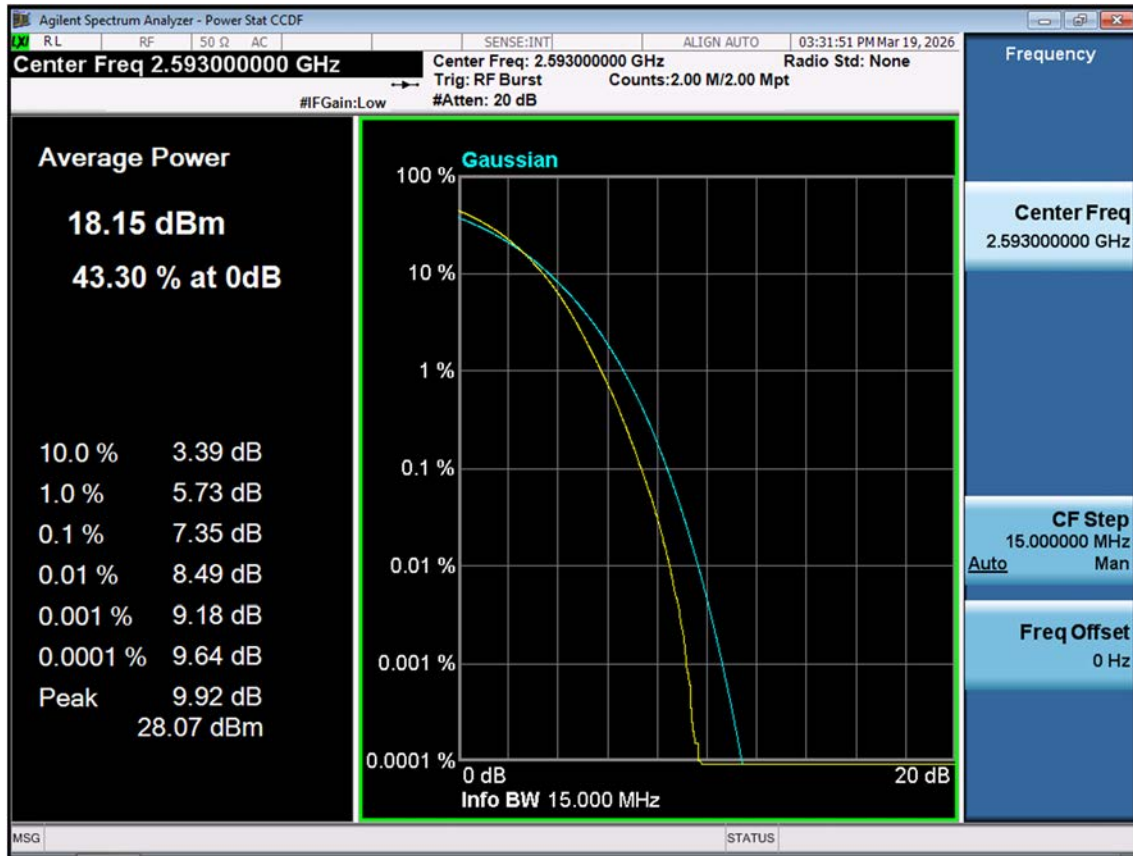


LTE B41_20 M_PAR_Mid_QPSK_FullRB

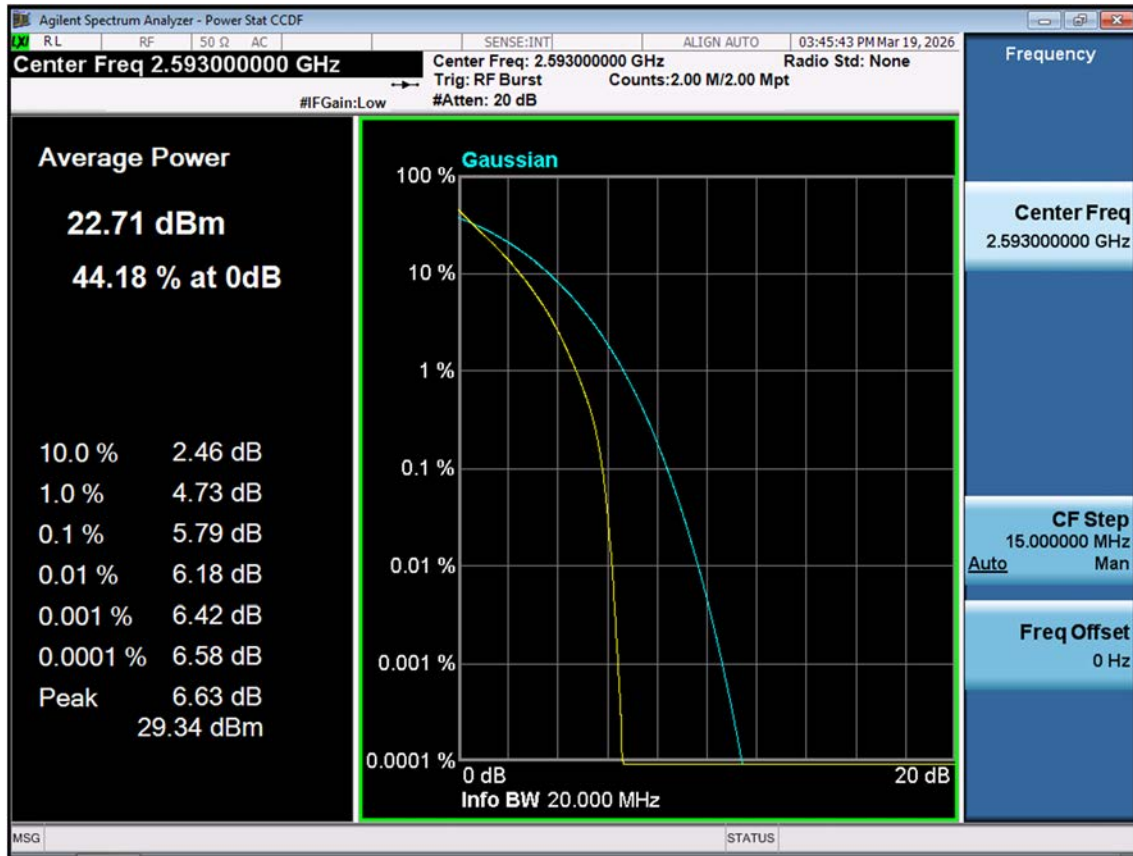


LTE B41_20 M_PAR_Mid_16QAM_FullRB

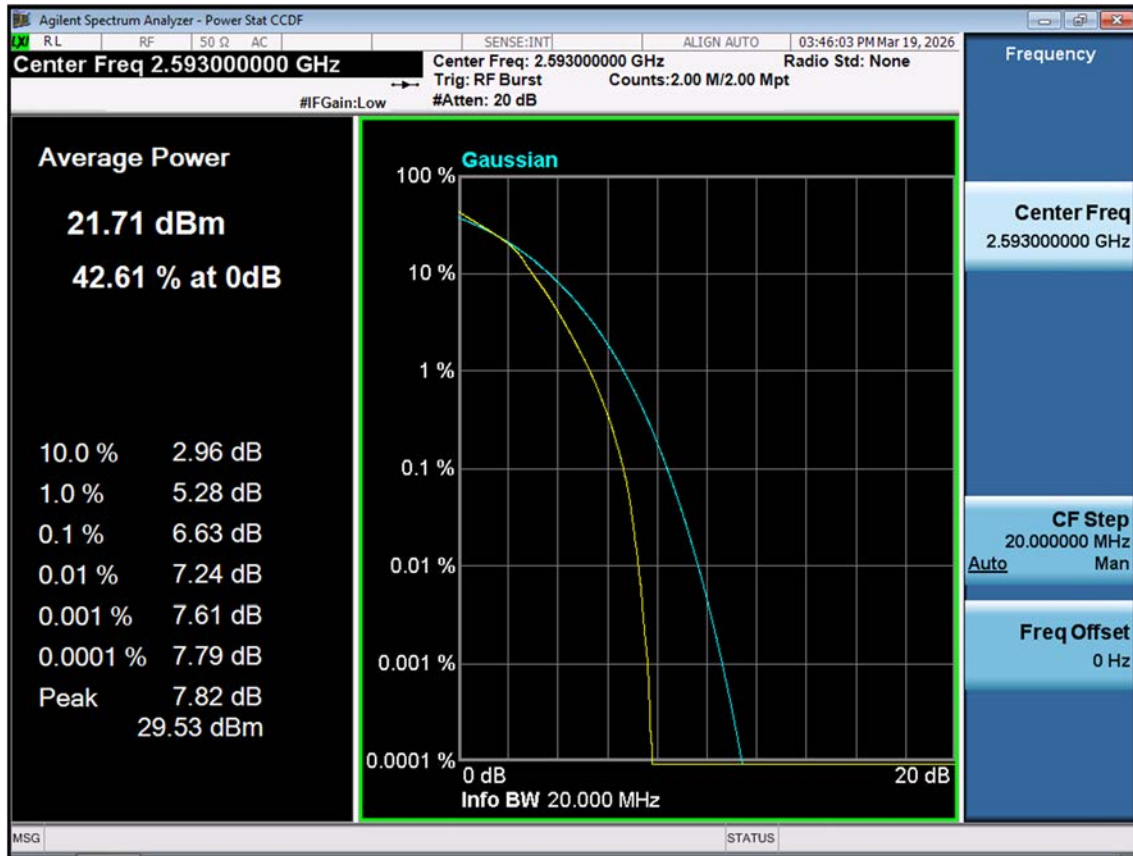

LTE B41_20 M_PAR_Mid_64QAM_FullRB

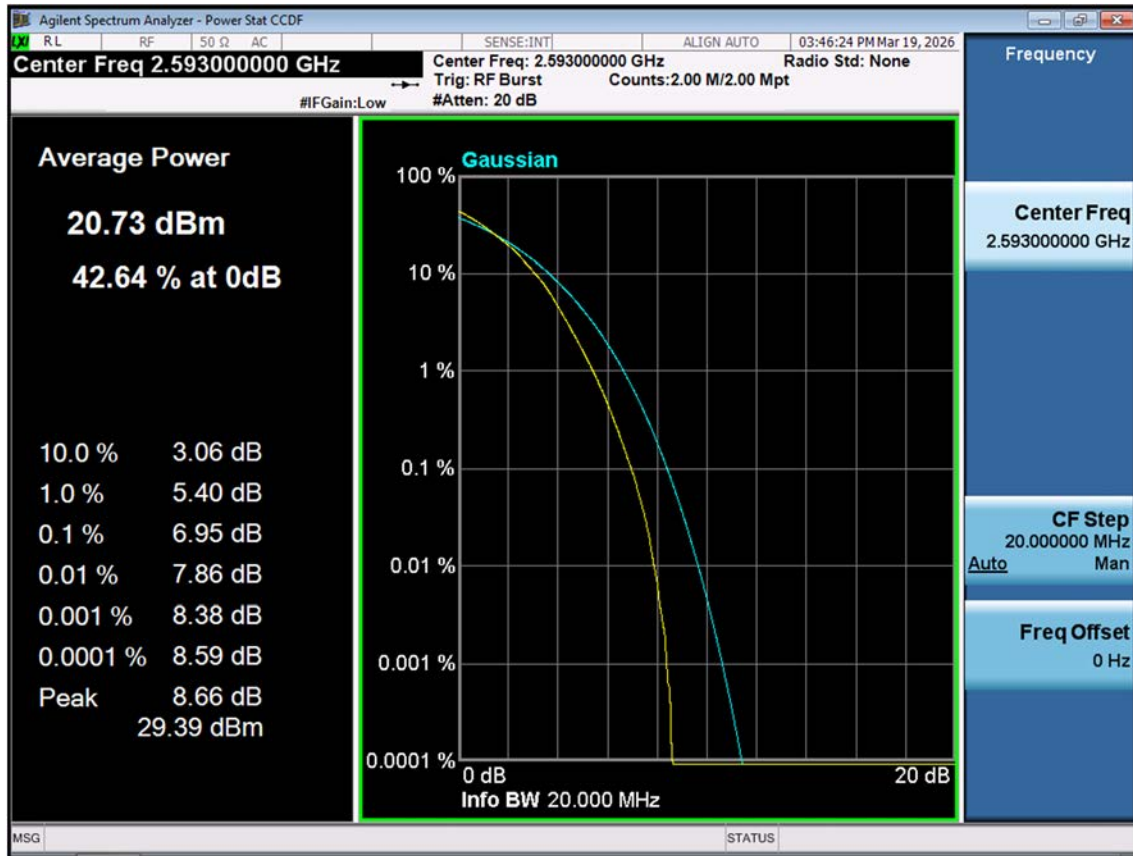


LTE B41_20 M_PAR_Mid_256QAM_FullRB

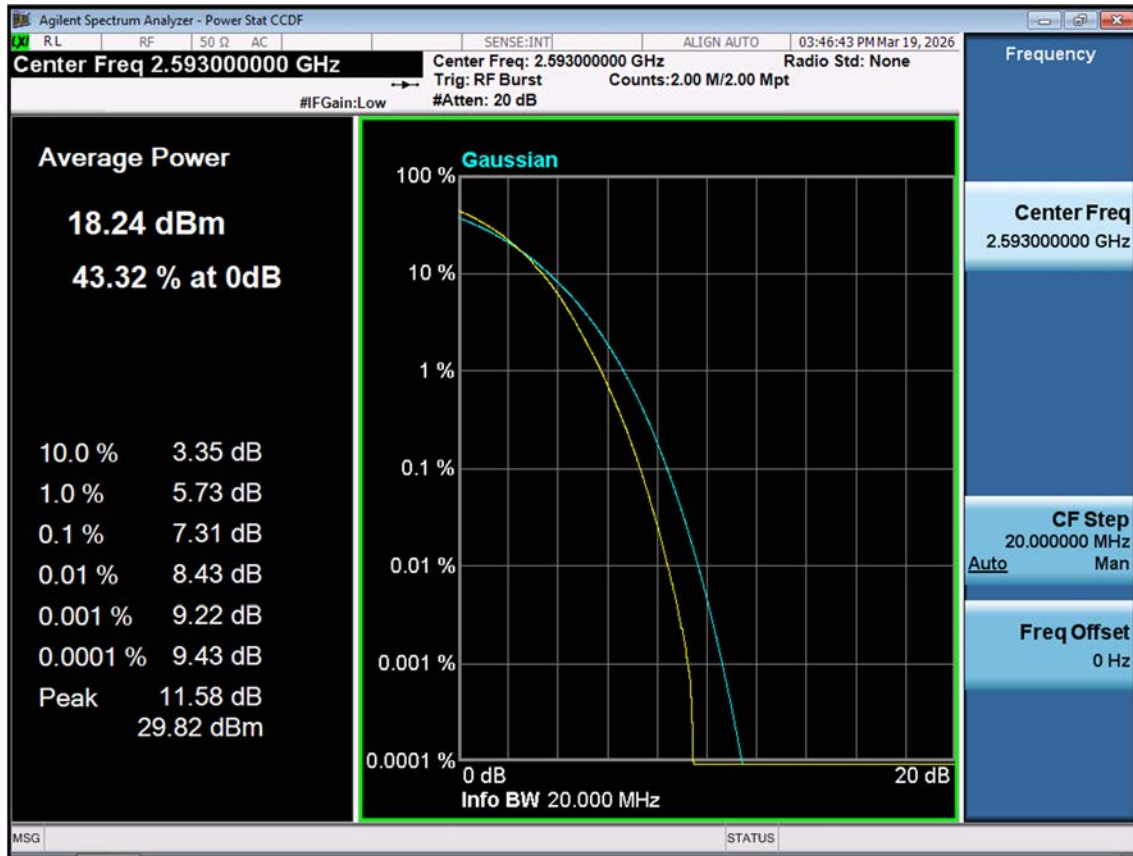


10.2 OCCUPIED BANDWIDTH


LTE B41_5 M_OBW_Mid_QPSK_FullRB

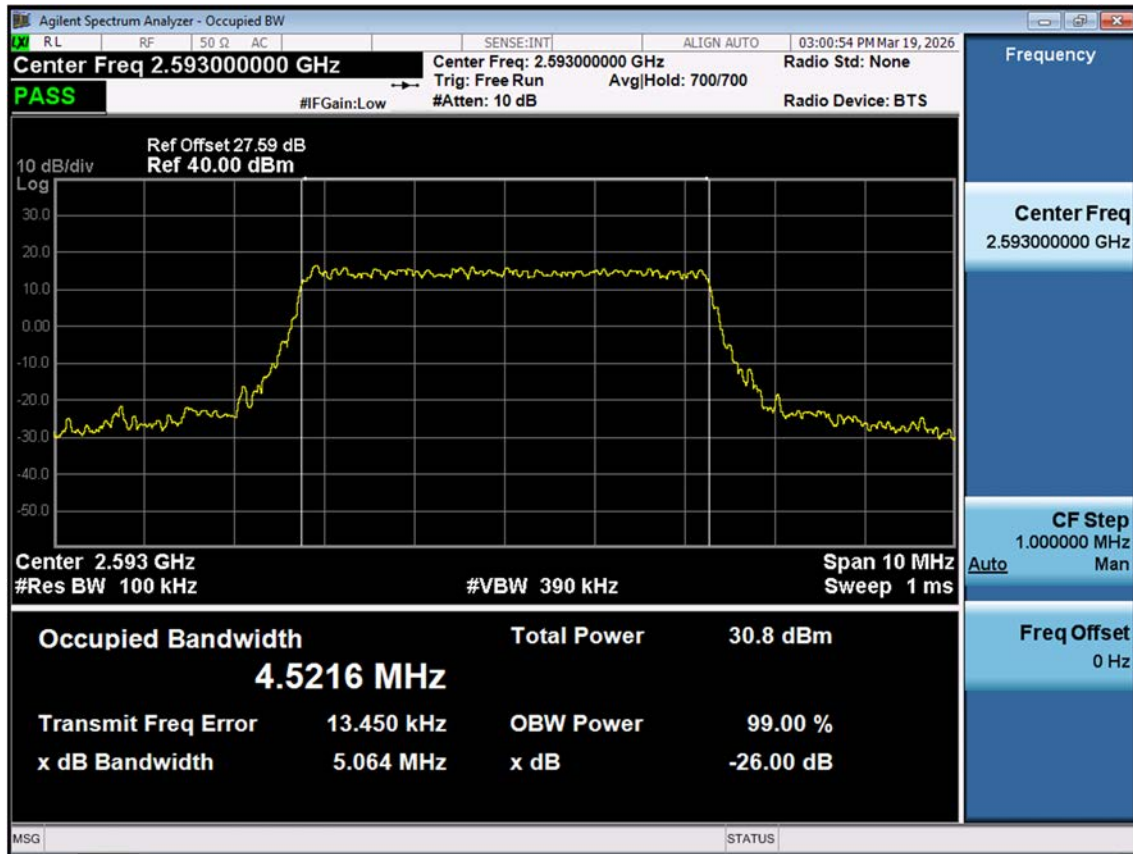


LTE B41_5 M_OBW_Mid_16QAM_FullRB

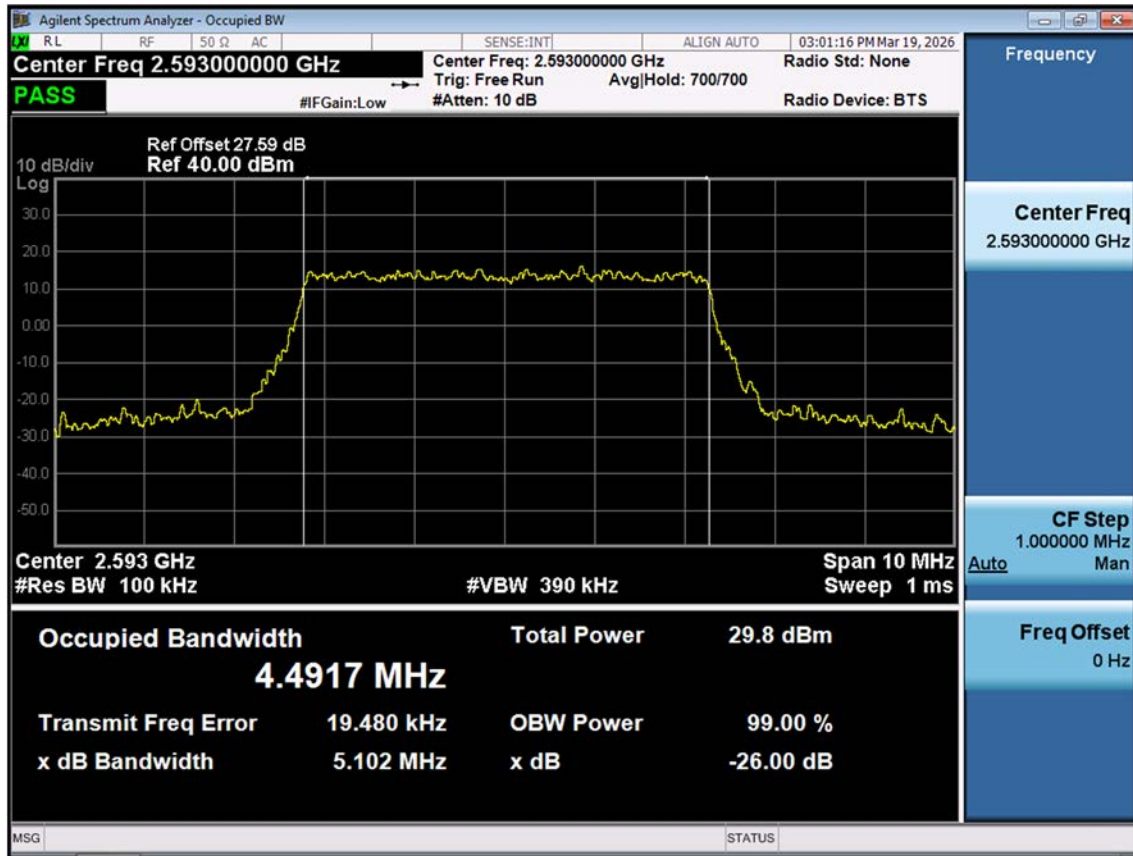


LTE B41_5 M_OBW_Mid_64QAM_FullRB

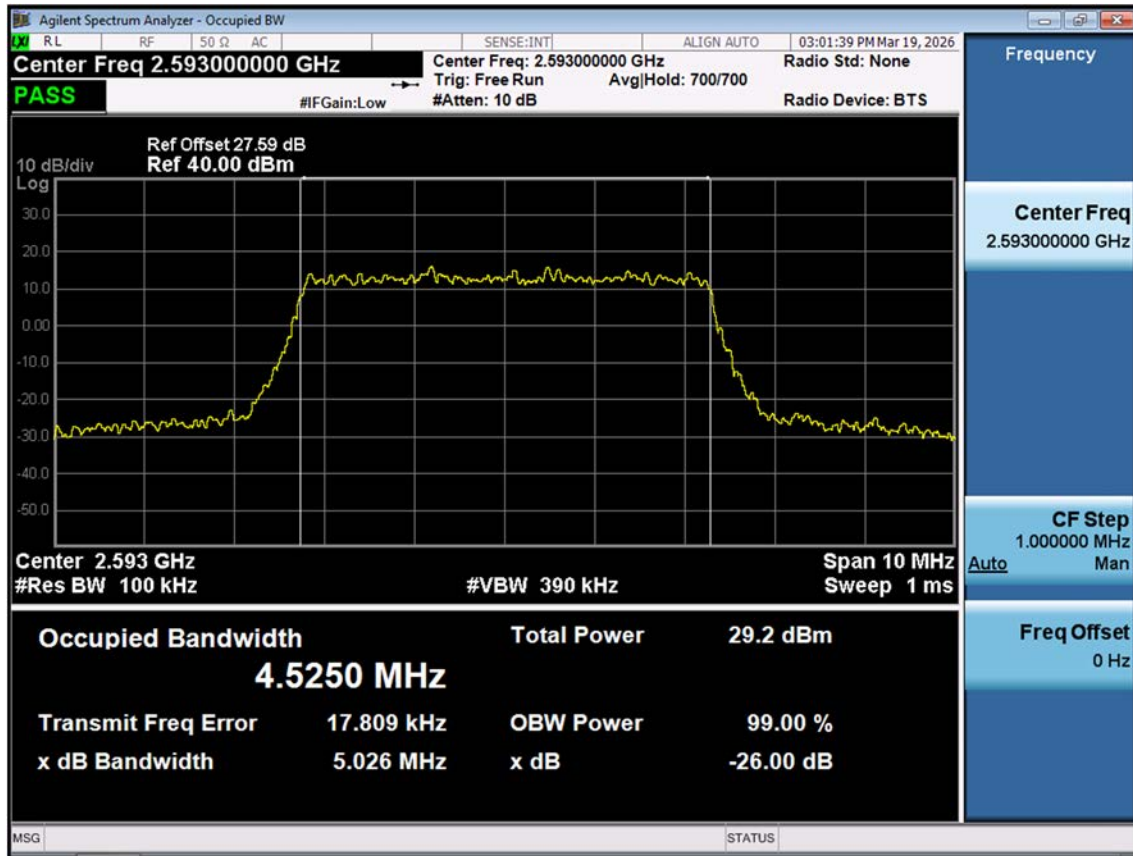


LTE B41_5 M_OBW_Mid_256QAM_FullRB

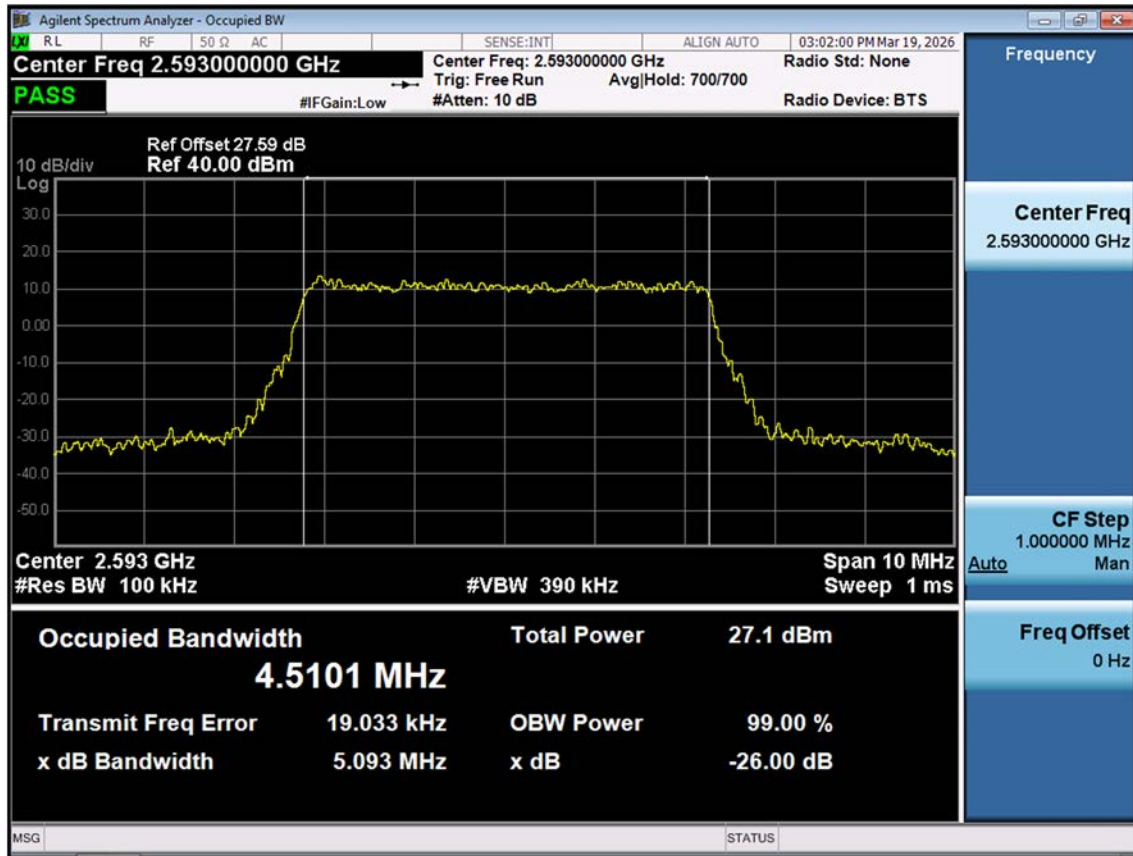


LTE B41_10 M_OBW_Mid_QPSK_FullRB

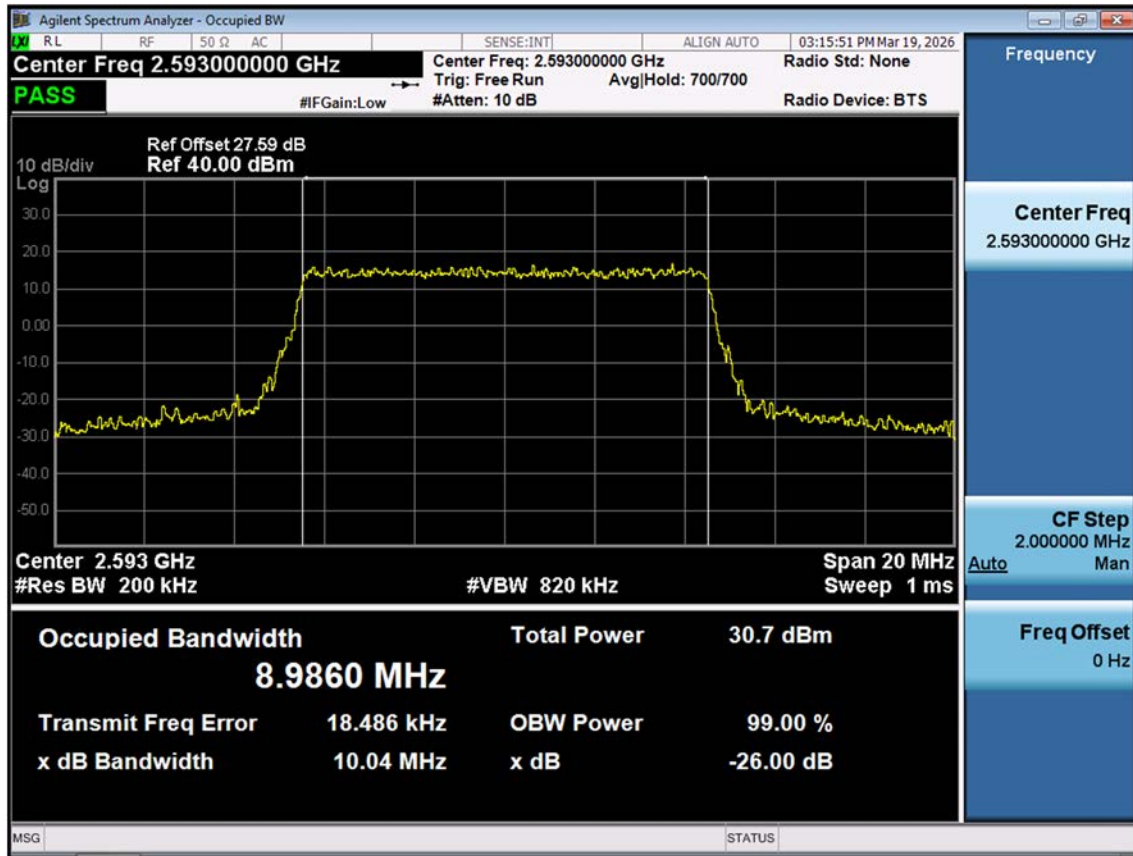


LTE B41_10 M_OBW_Mid_16QAM_FullRB

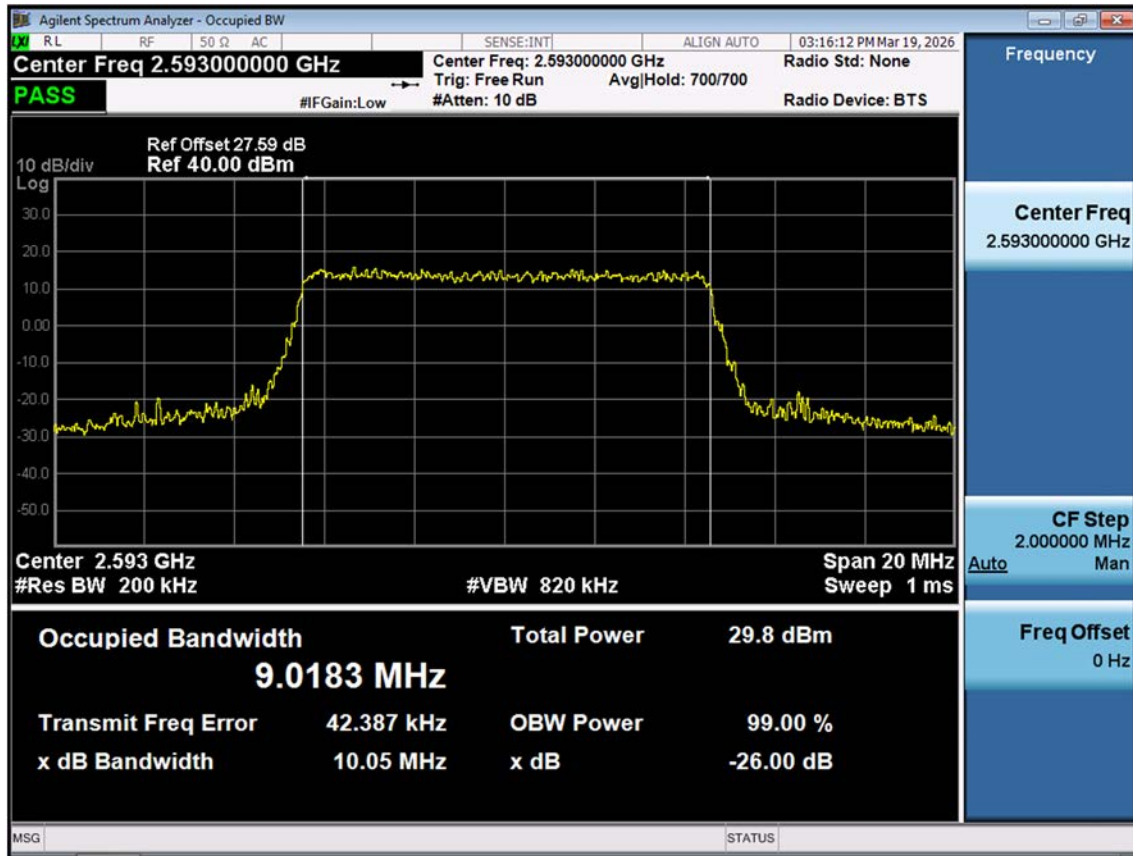


LTE B41_10 M_OBW_Mid_64QAM_FullRB

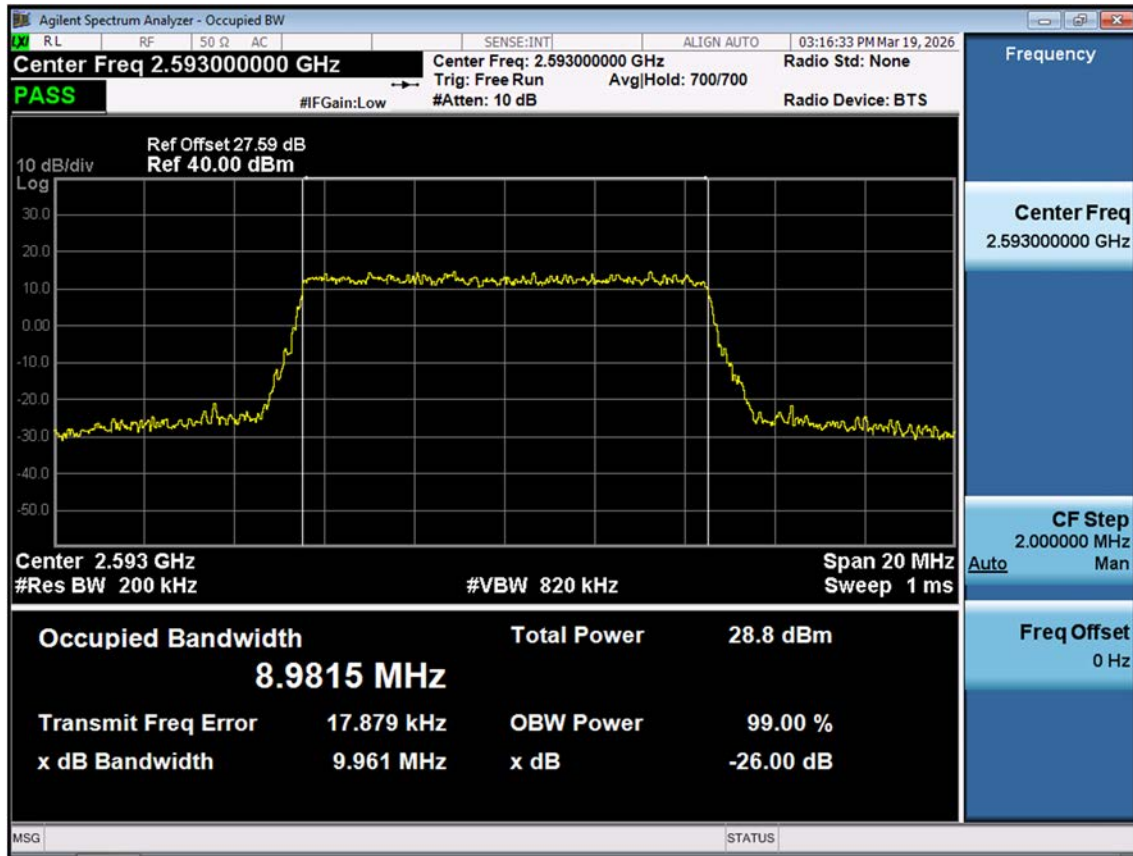


LTE B41_10 M_OBW_Mid_256QAM_FullRB

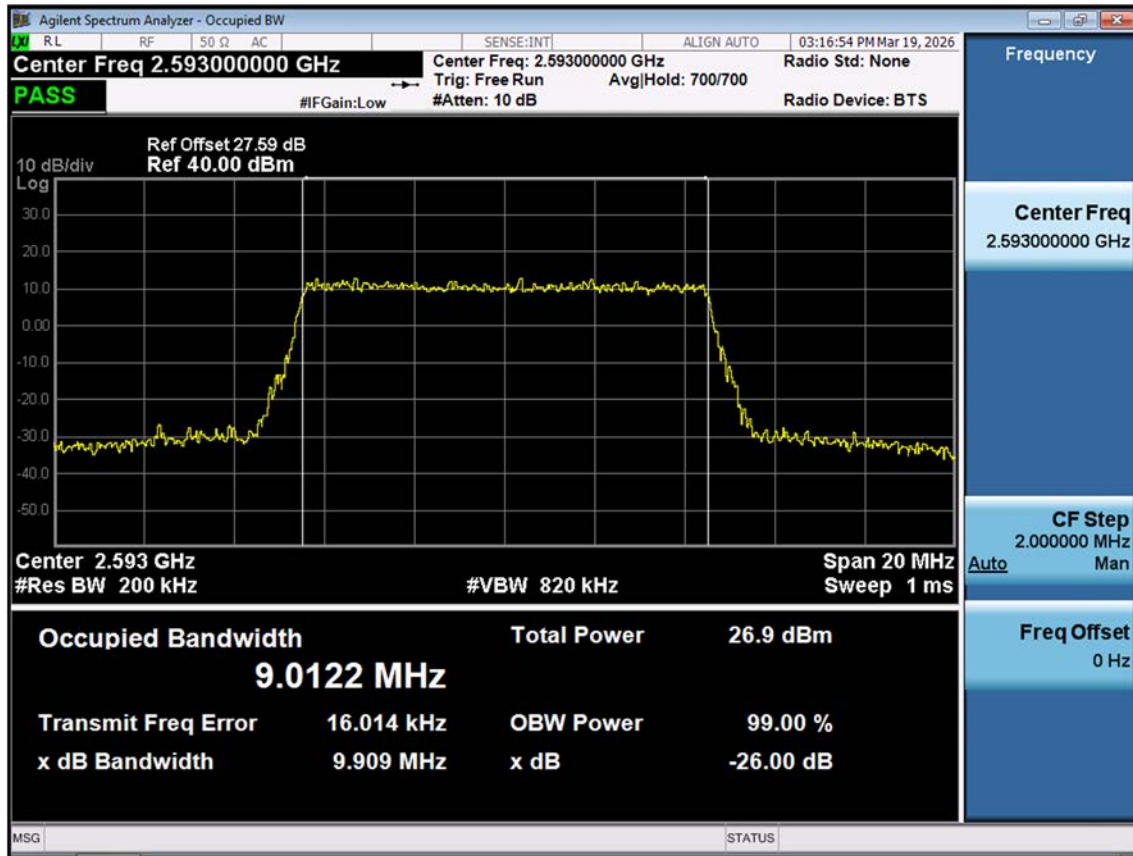


LTE B41_15 M_OBW_Mid_QPSK_FullRB

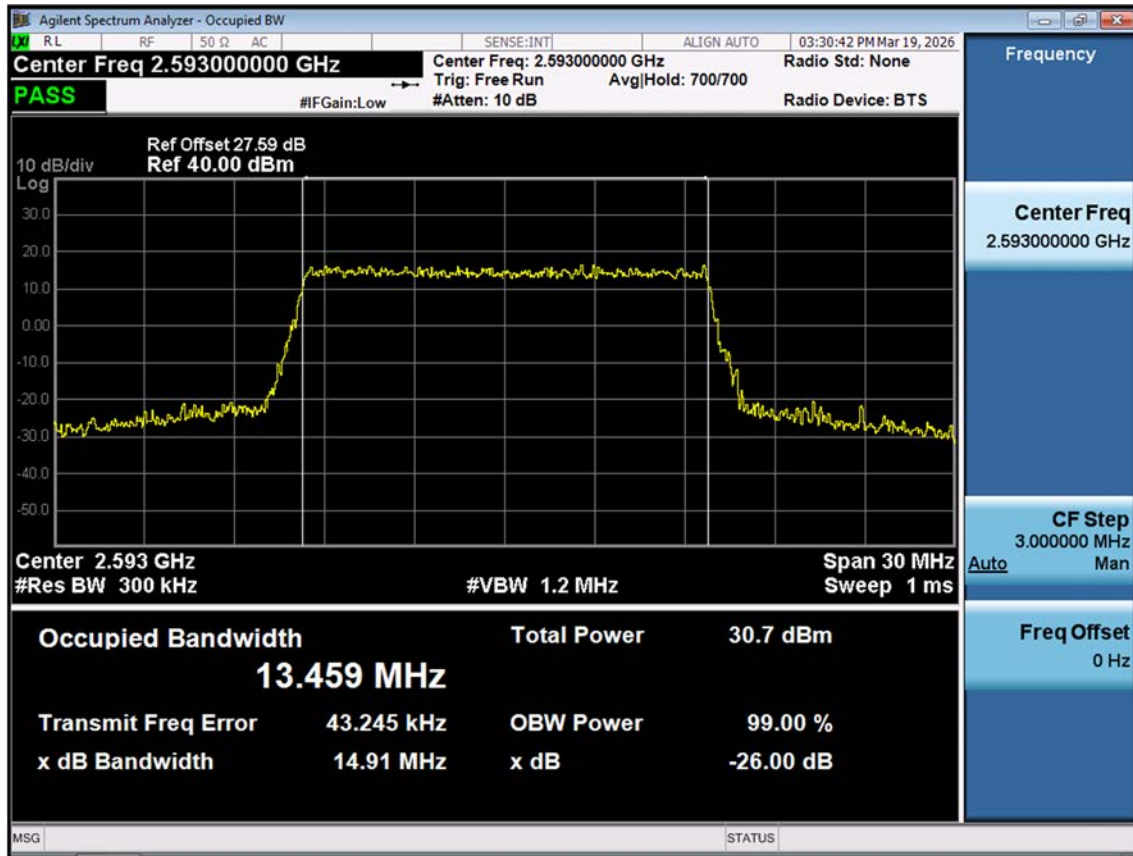


LTE B41_15 M_OBW_Mid_16QAM_FullRB

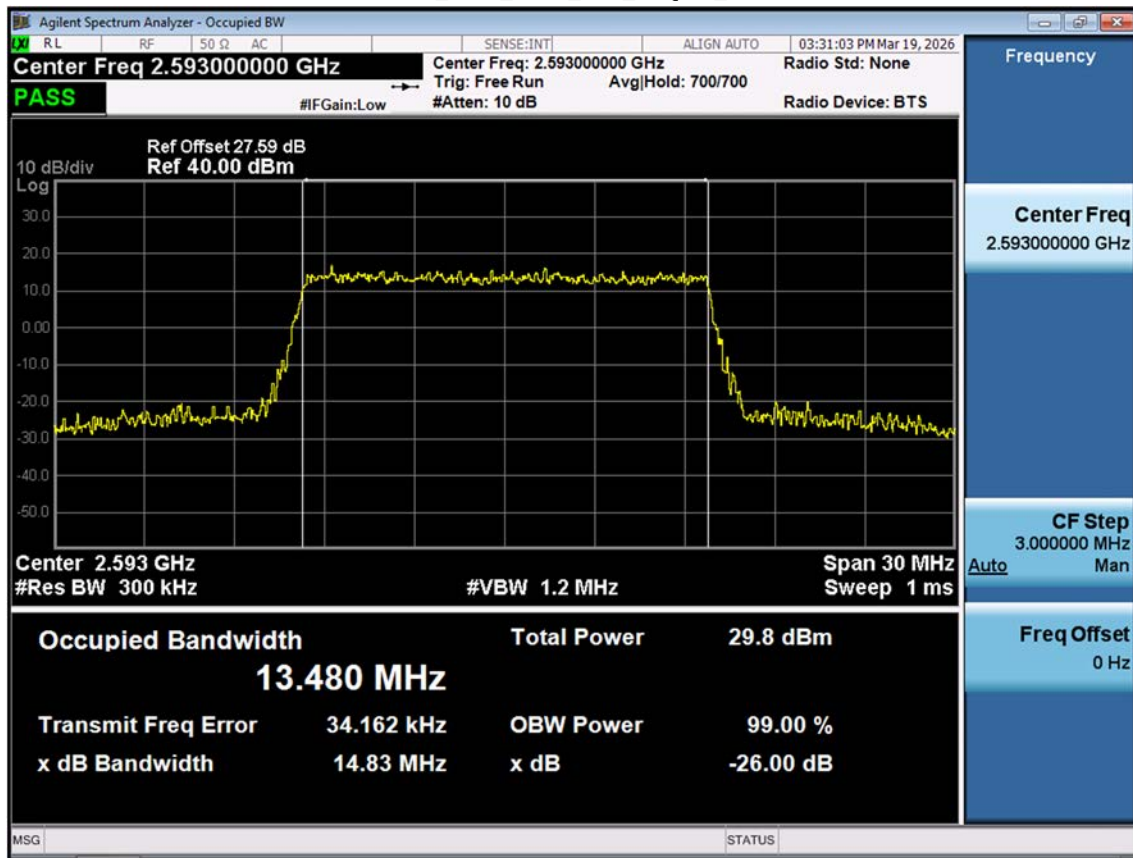


LTE B41_15 M_OBW_Mid_64QAM_FullRB

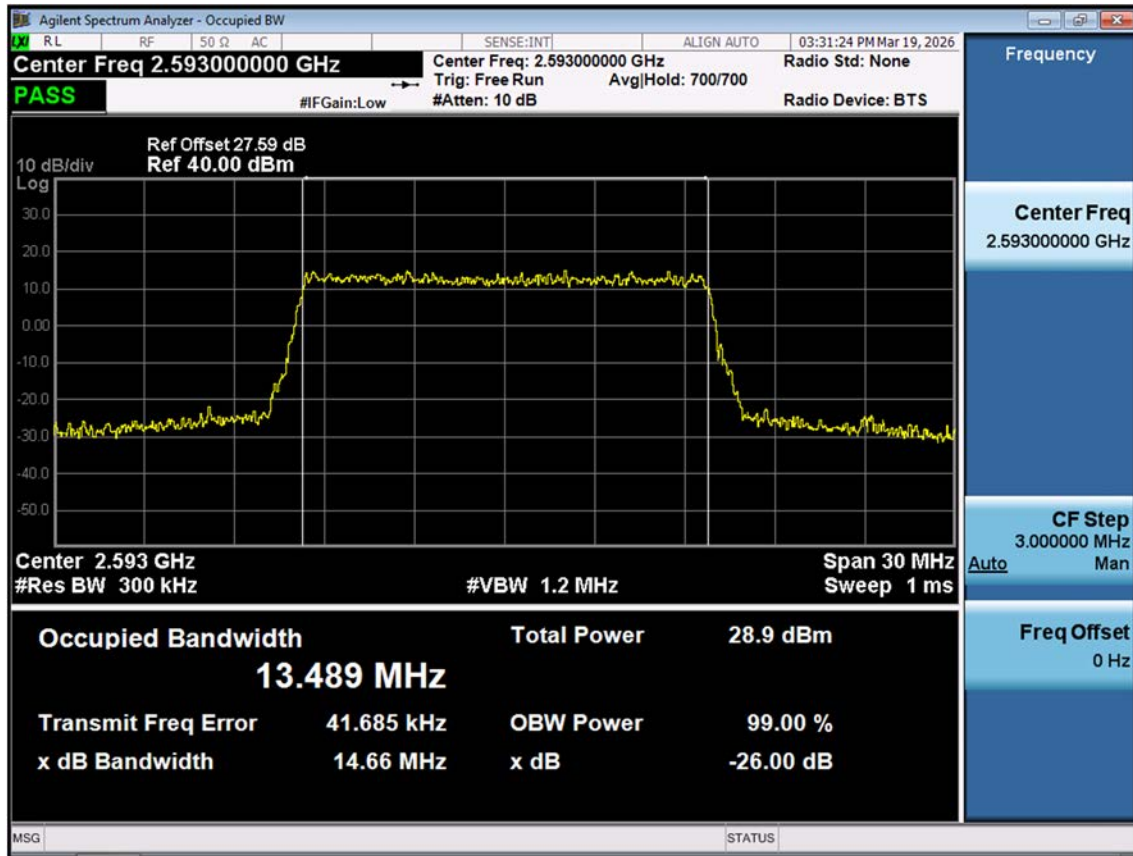


LTE B41_15 M_OBW_Mid_256QAM_FullRB

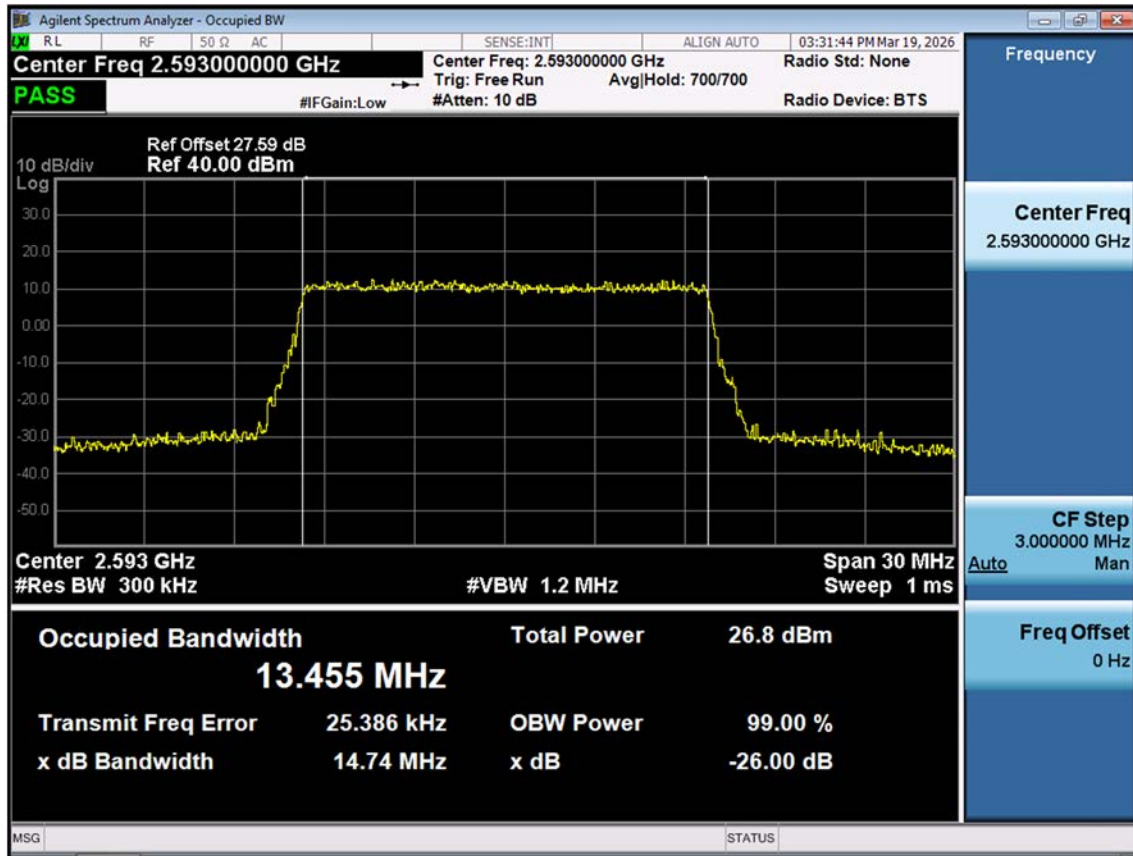


LTE B41_20 M_OBW_Mid_QPSK_FullRB

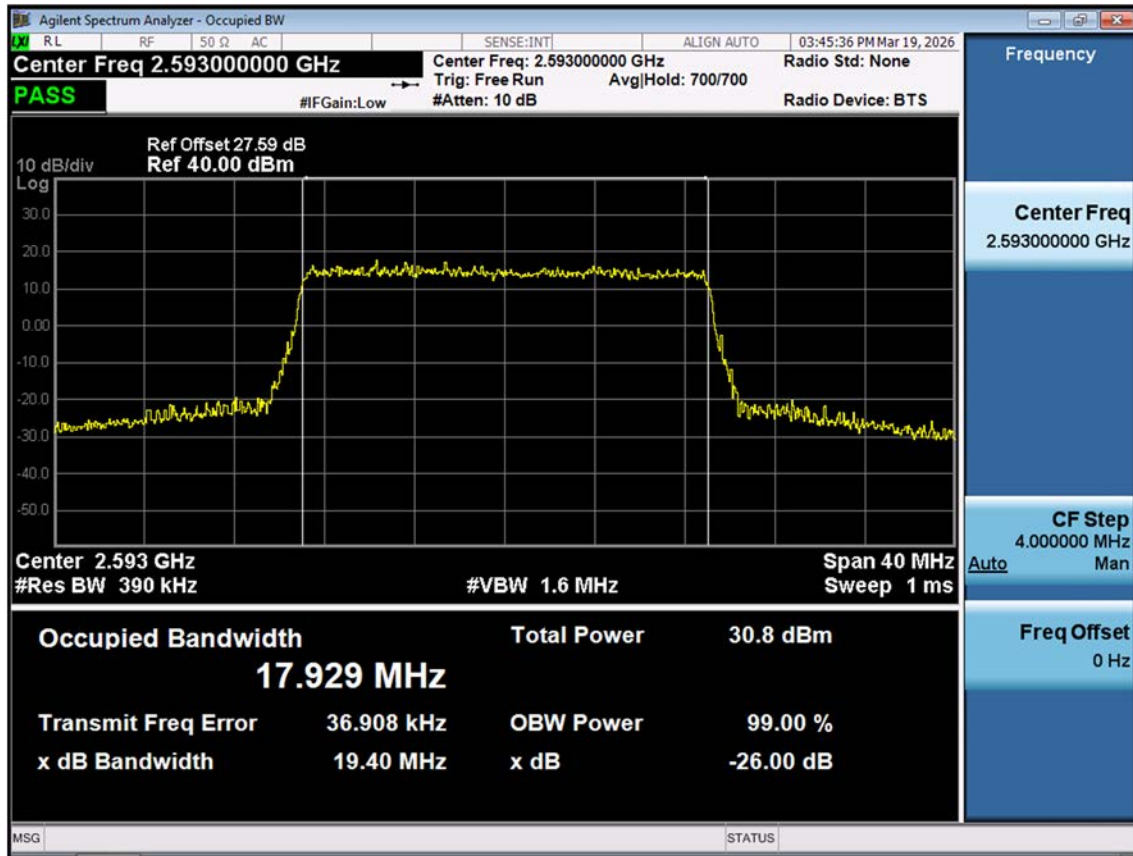


LTE B41_20 M_OBW_Mid_16QAM_FullRB

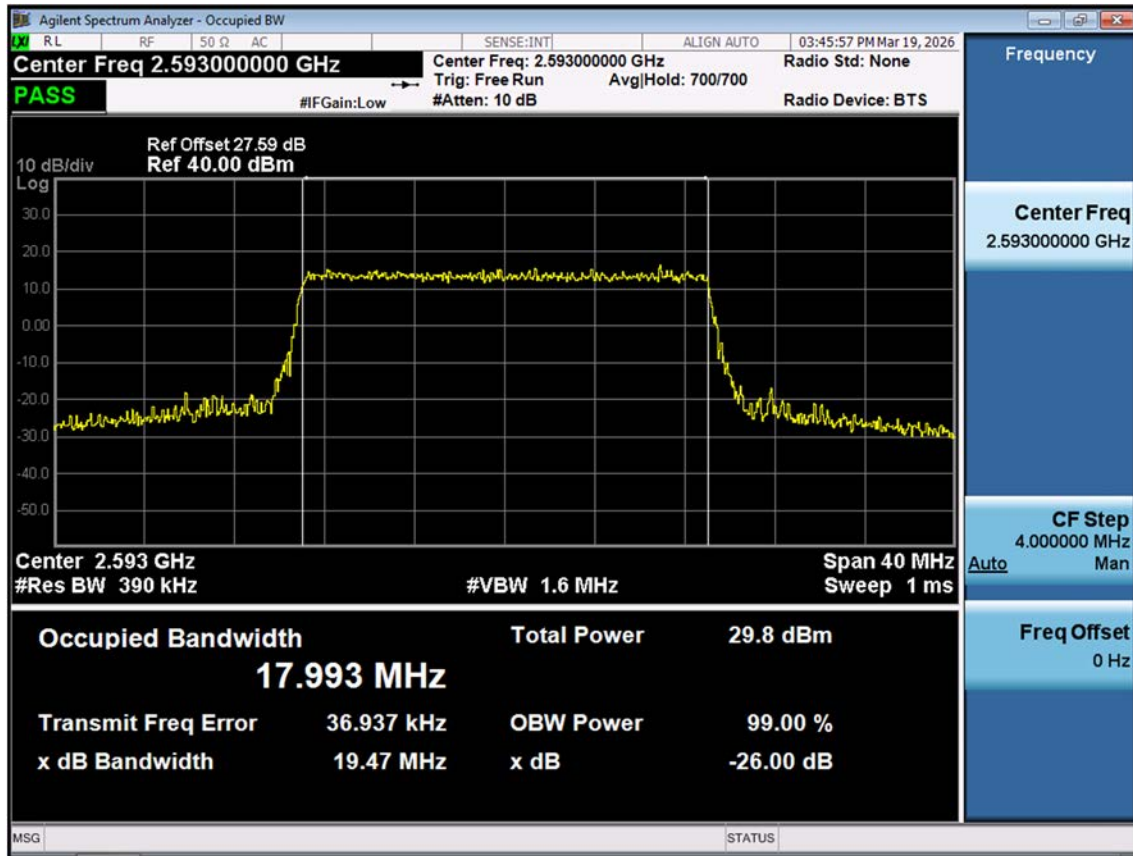

LTE B41_20 M_OBW_Mid_64QAM_FullRB

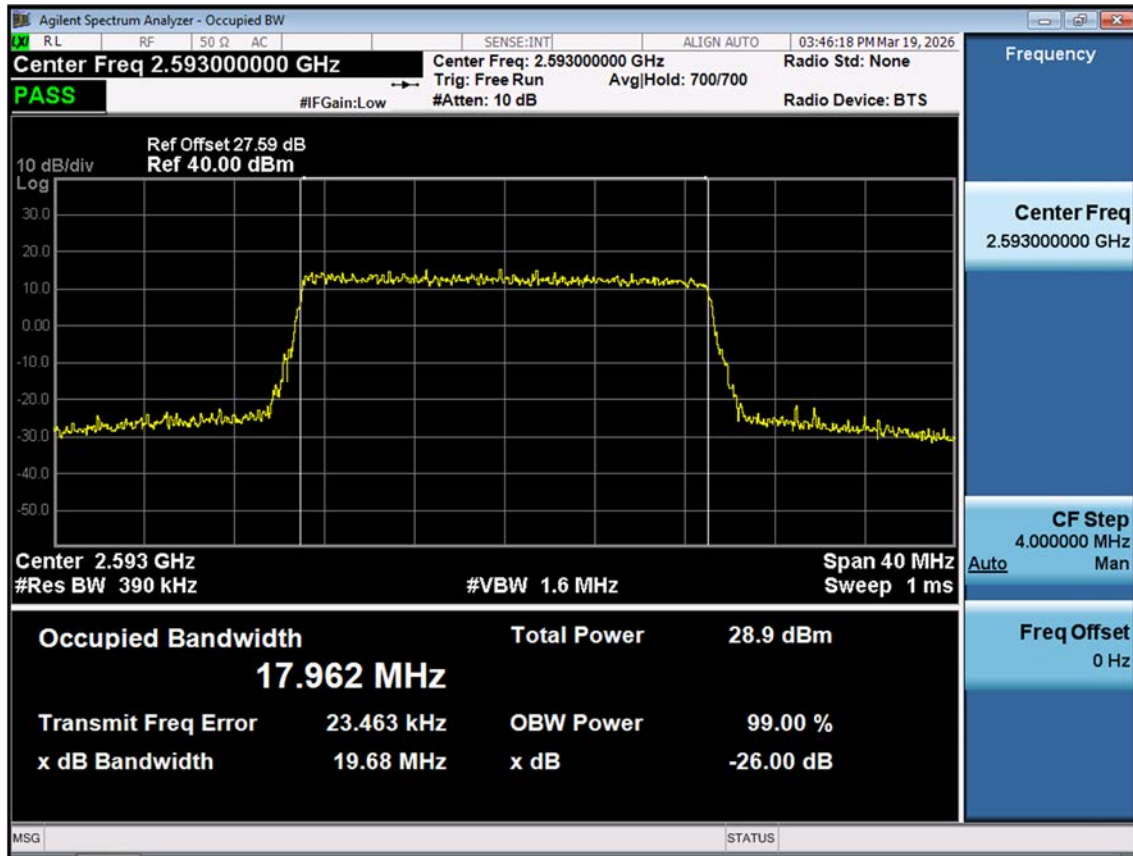


LTE B41_20 M_OBW_Mid_256QAM_FullRB

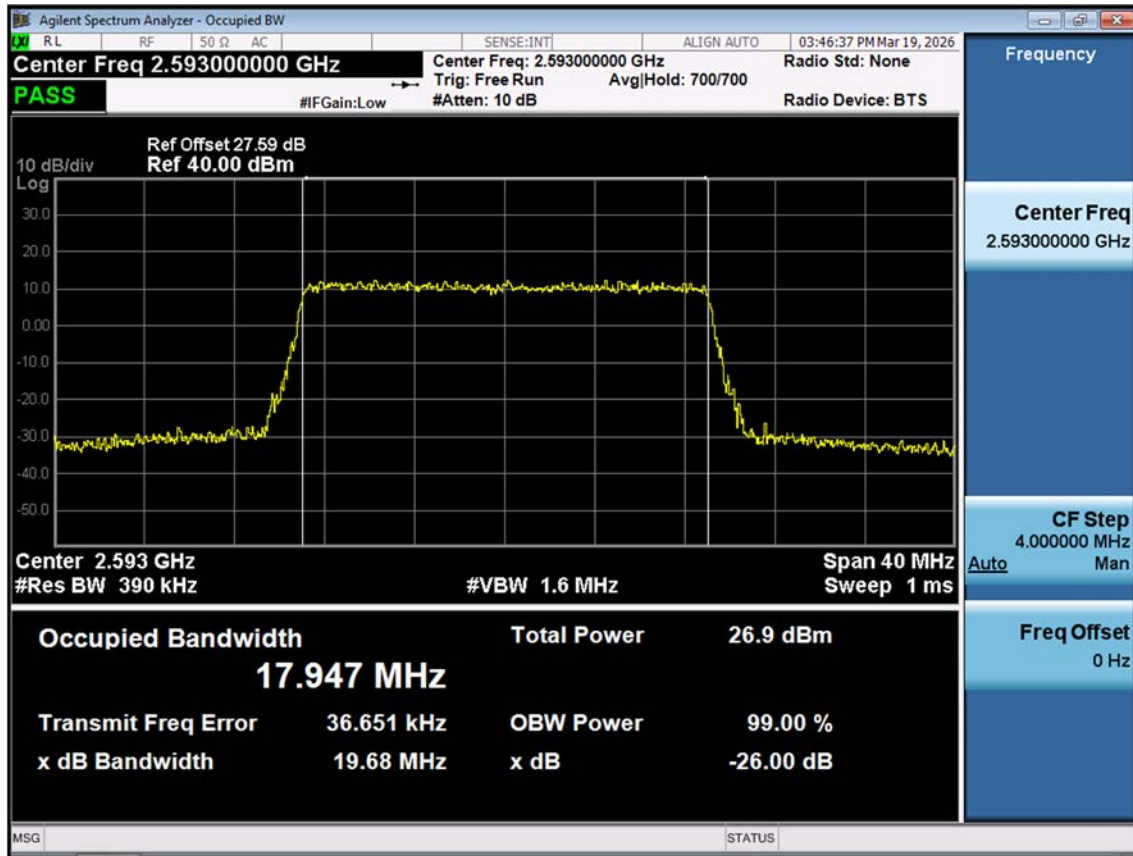


10.3 CONDUCTED SPURIOUS EMISSIONS


LTE B41_5 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

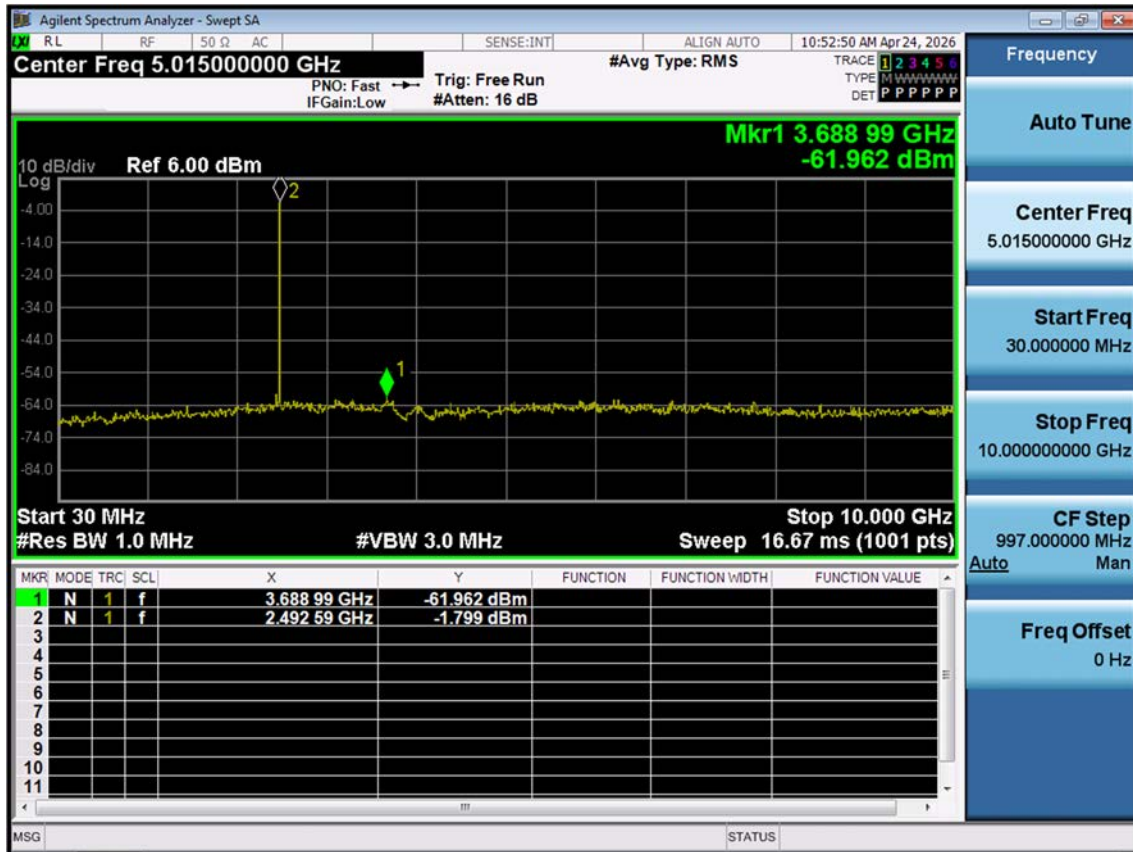


LTE B41_5 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

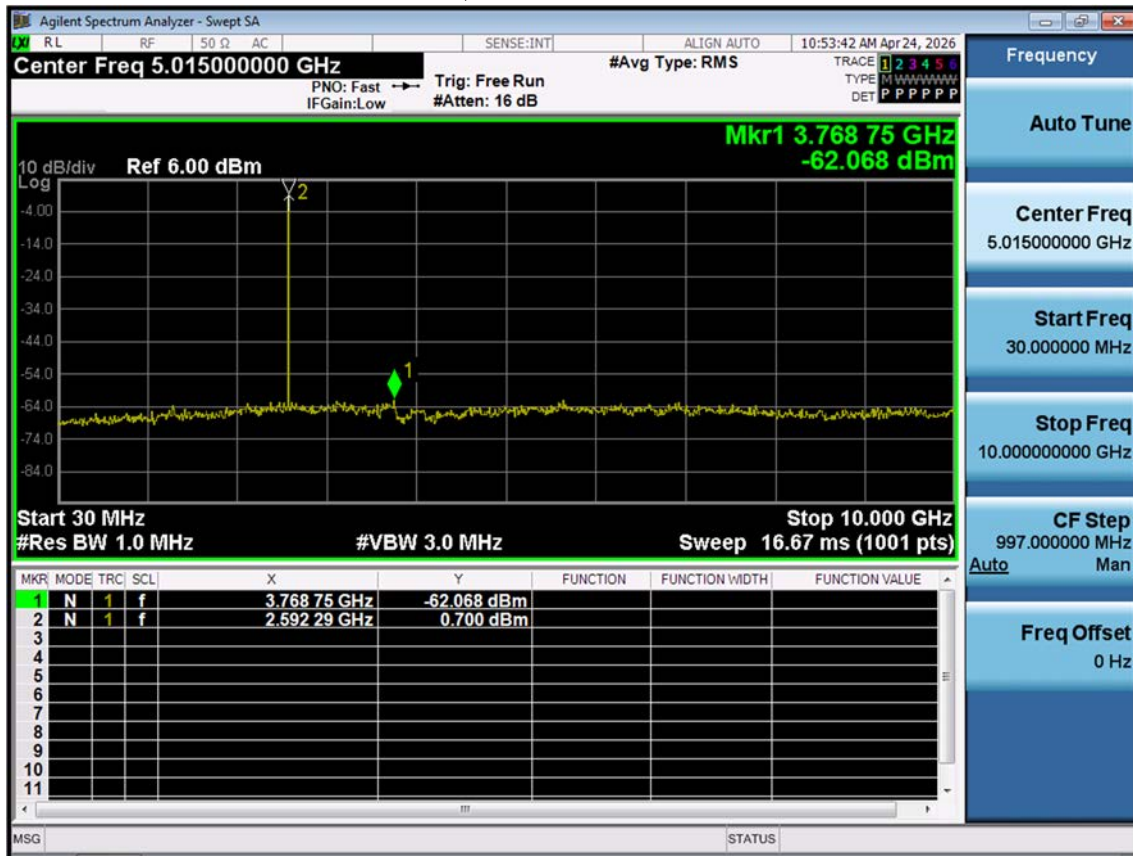


LTE B41_5 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

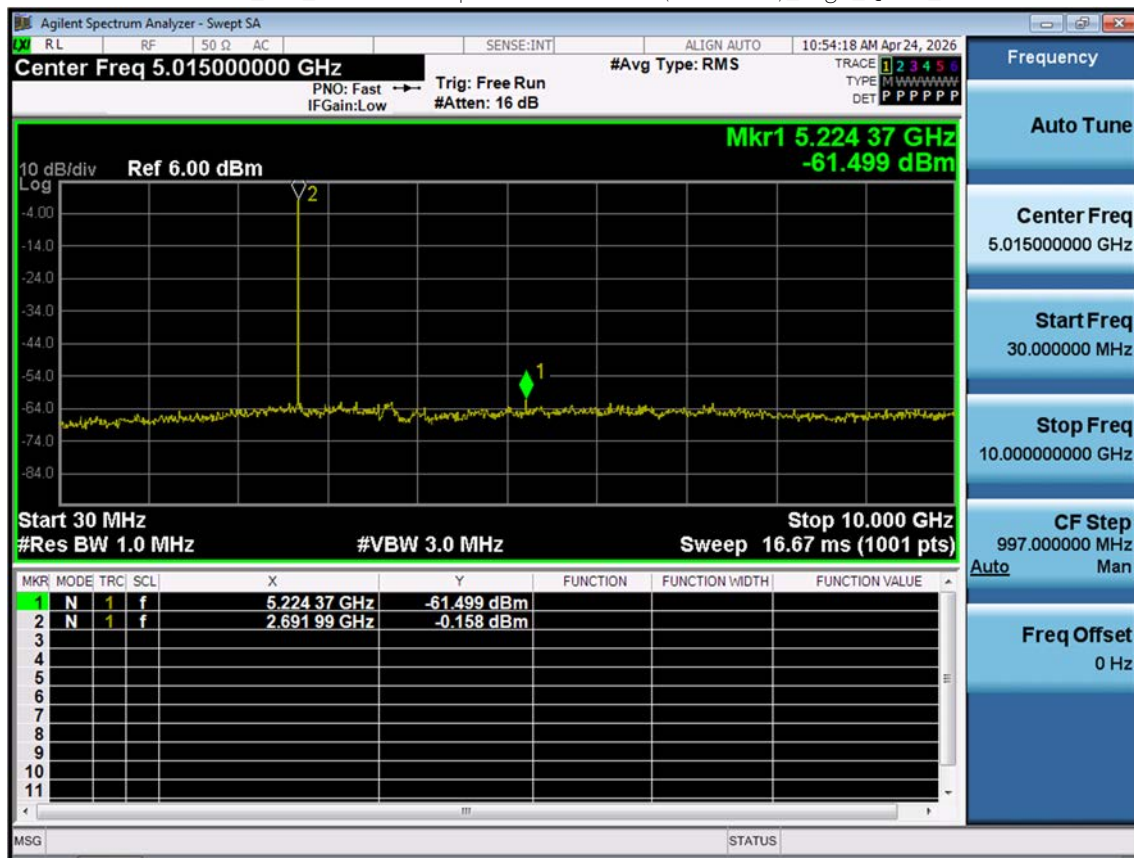


LTE B41_10 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

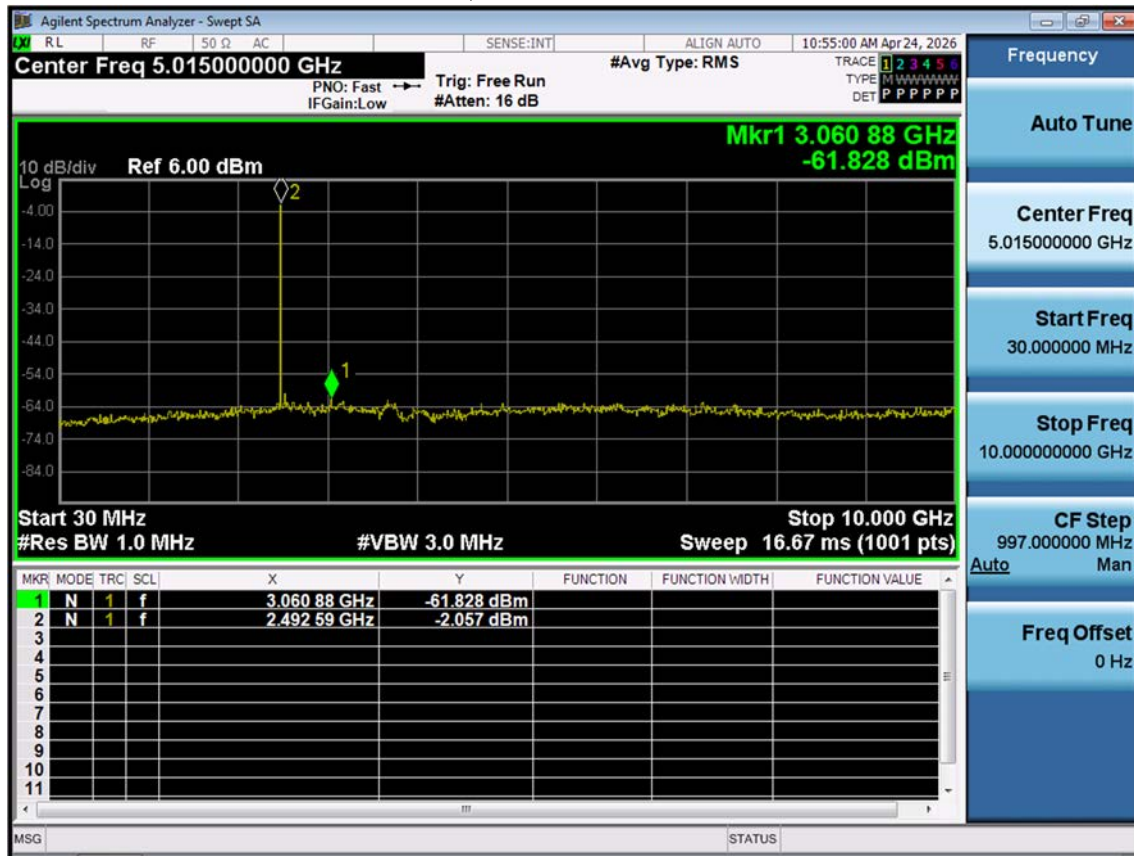


LTE B41_10 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

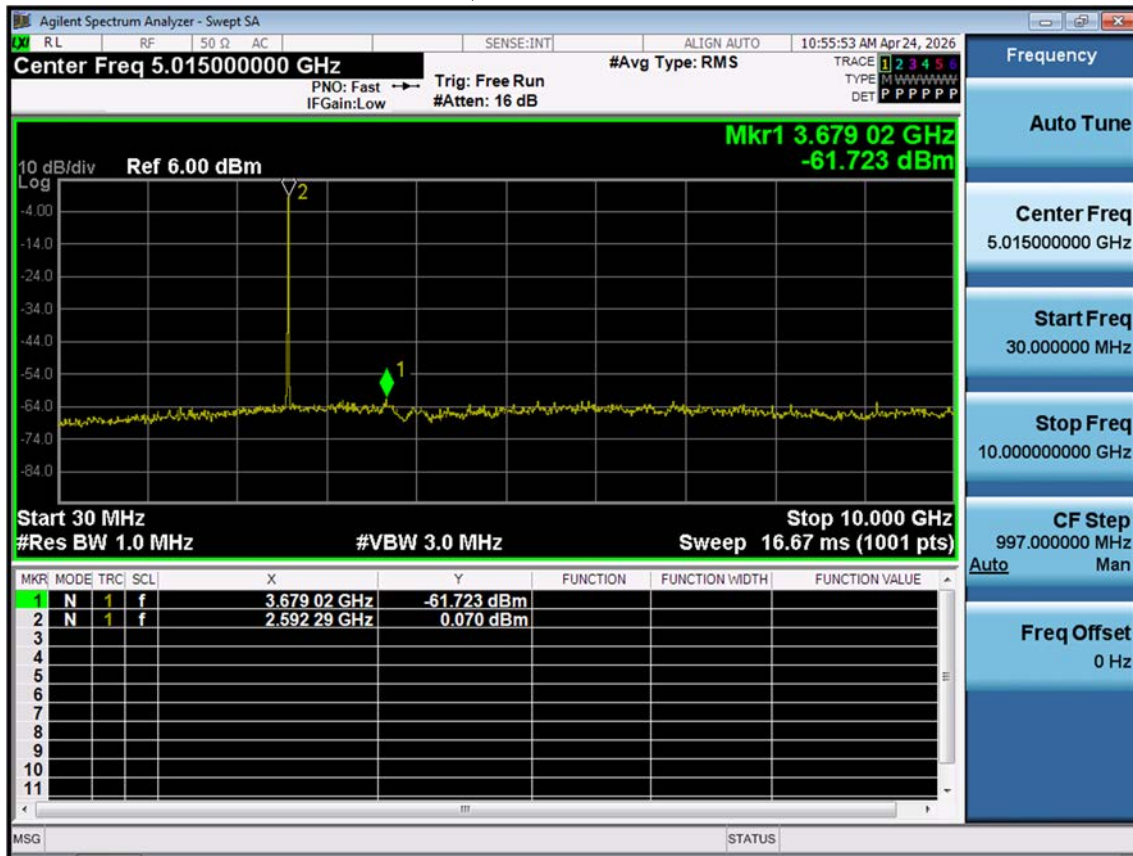


LTE B41_10 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

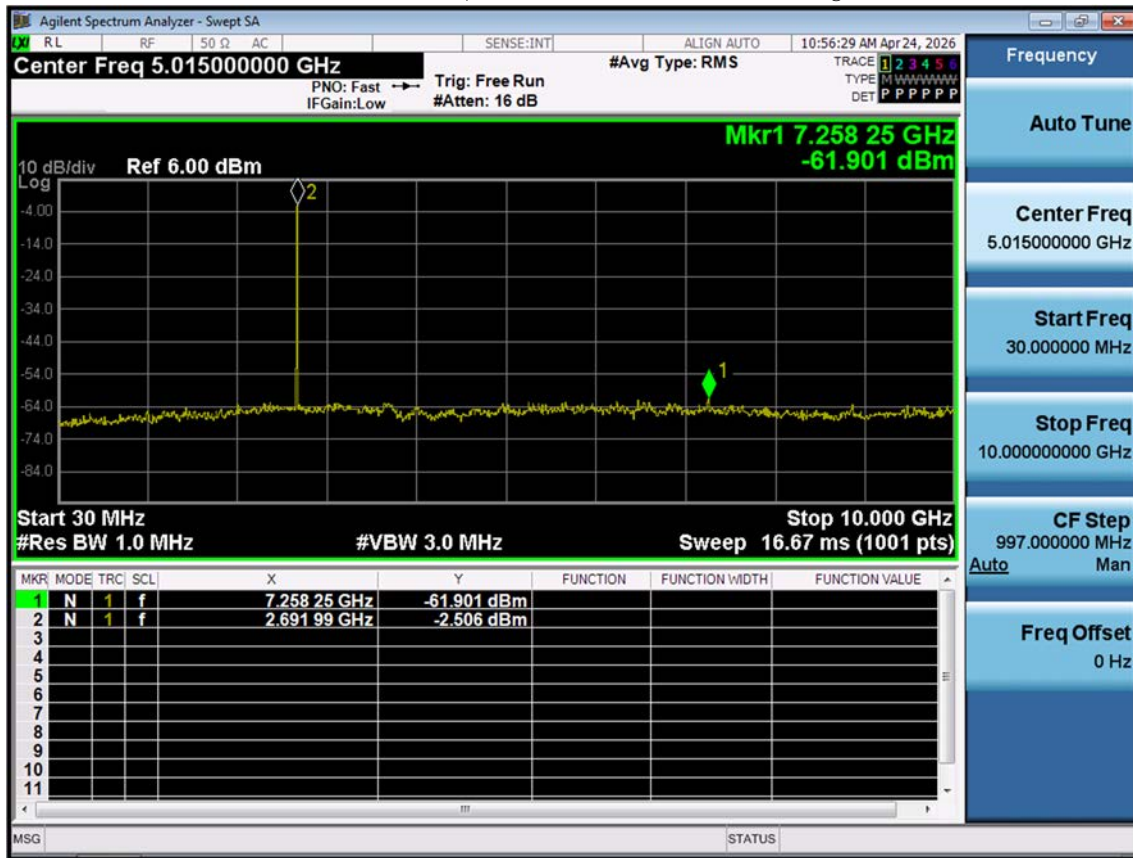


LTE B41_15 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

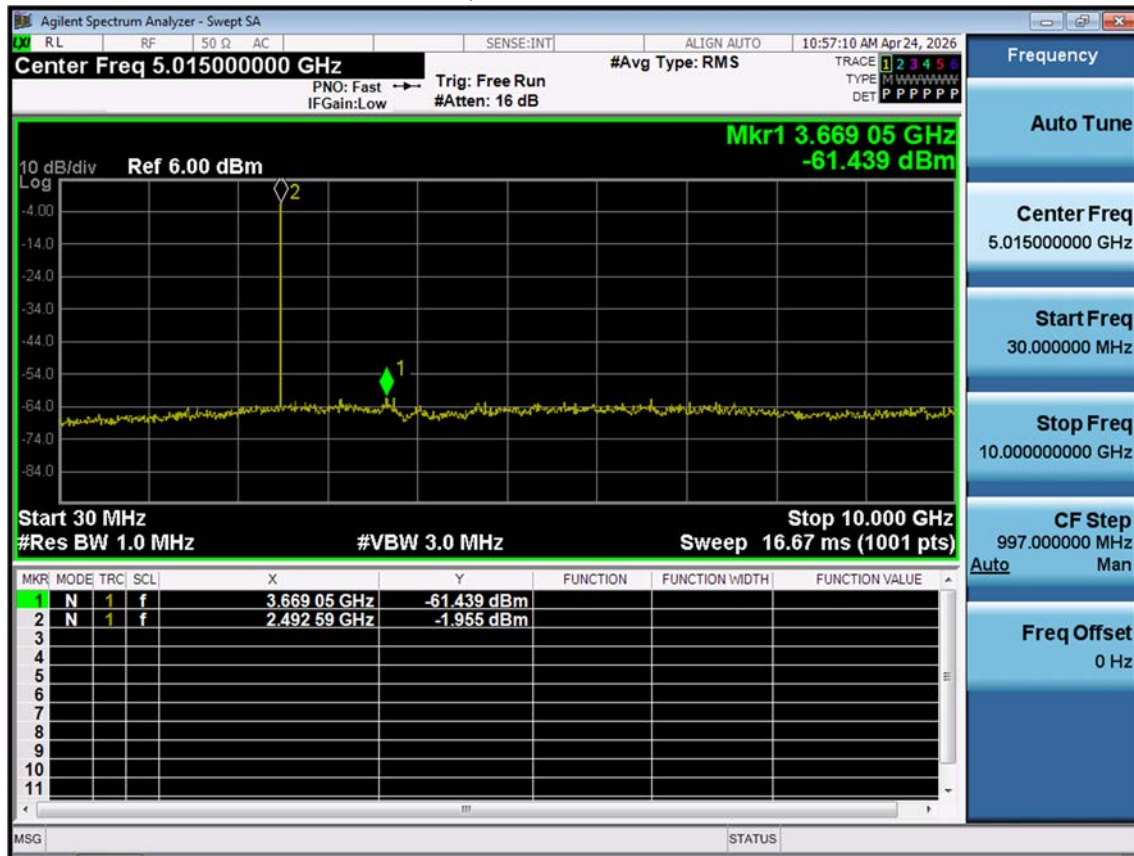


LTE B41_15 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

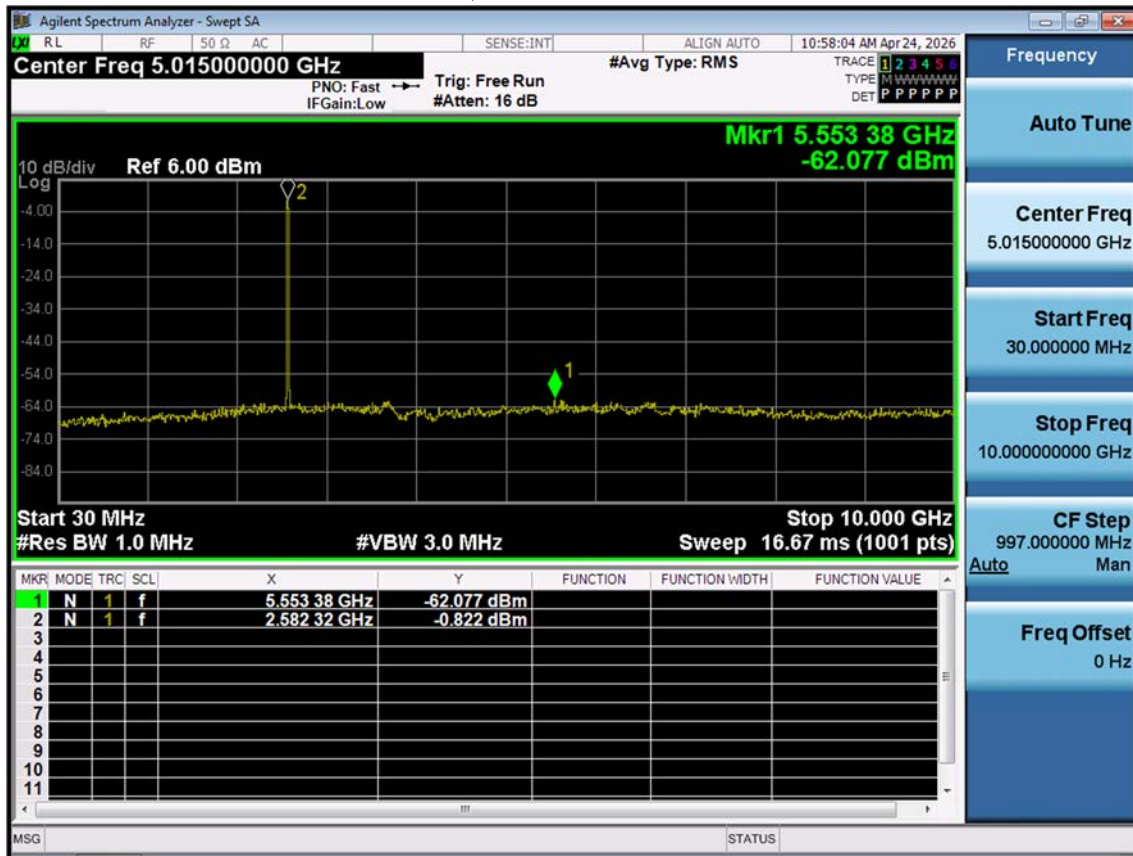


LTE B41_15 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

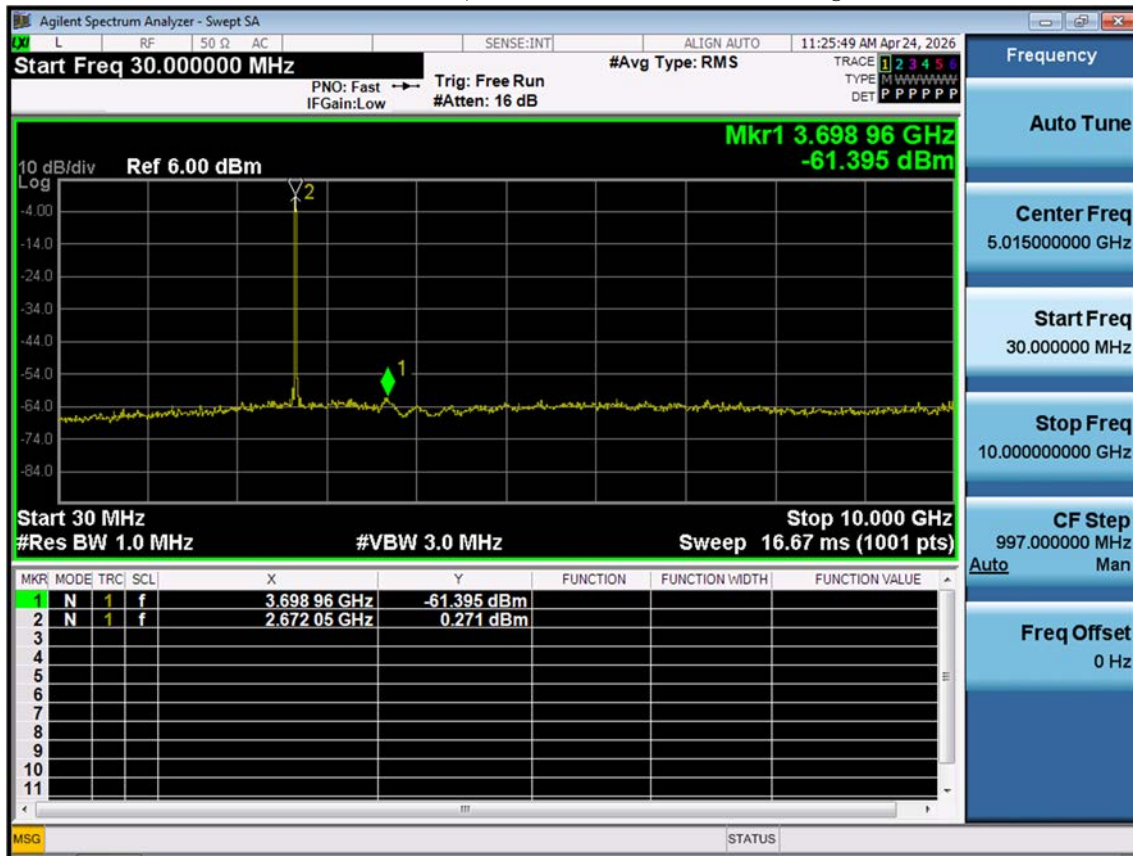


LTE B41_20 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

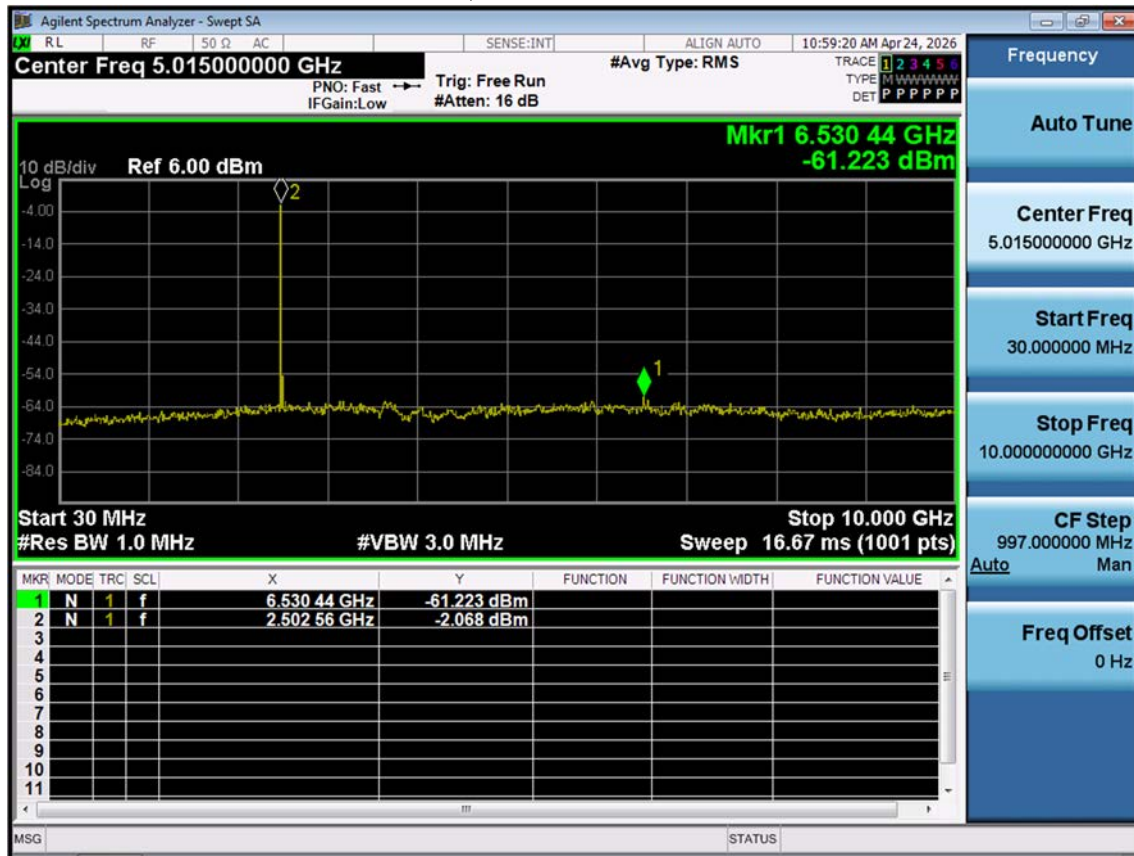

LTE B41_20 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

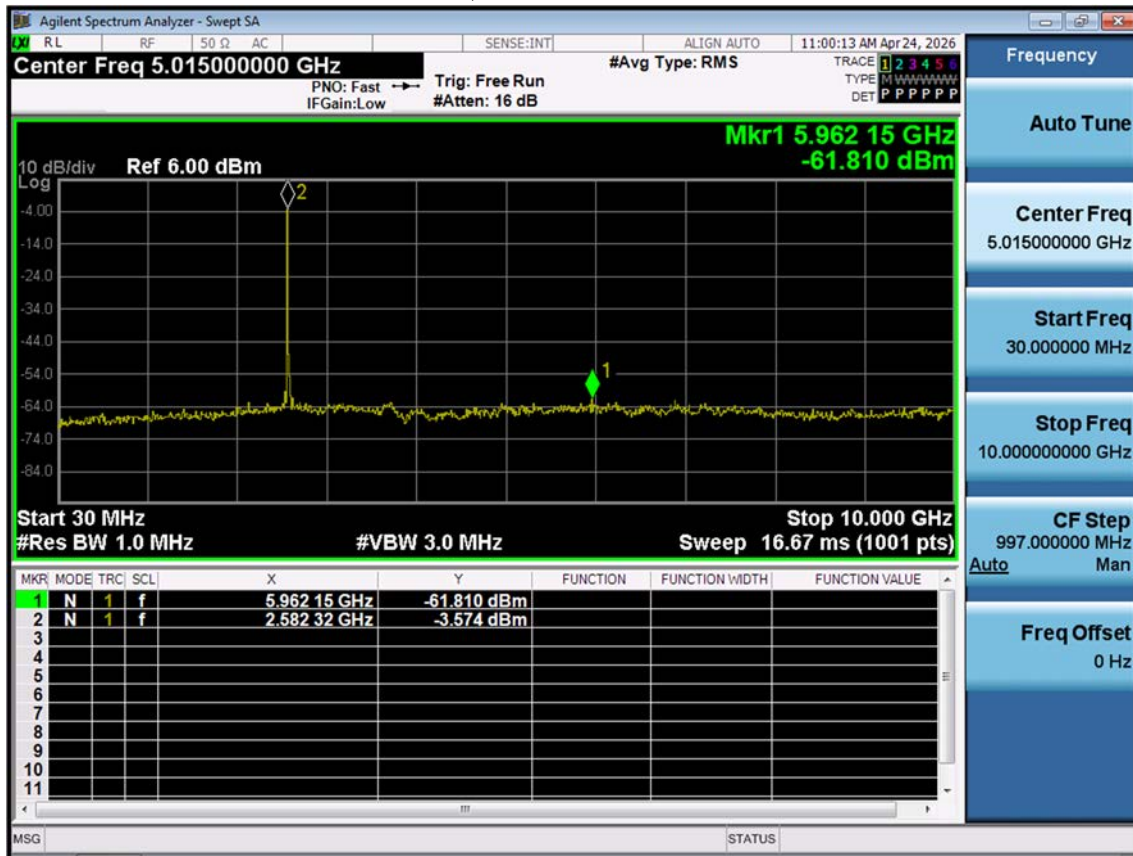

LTE B41_20 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

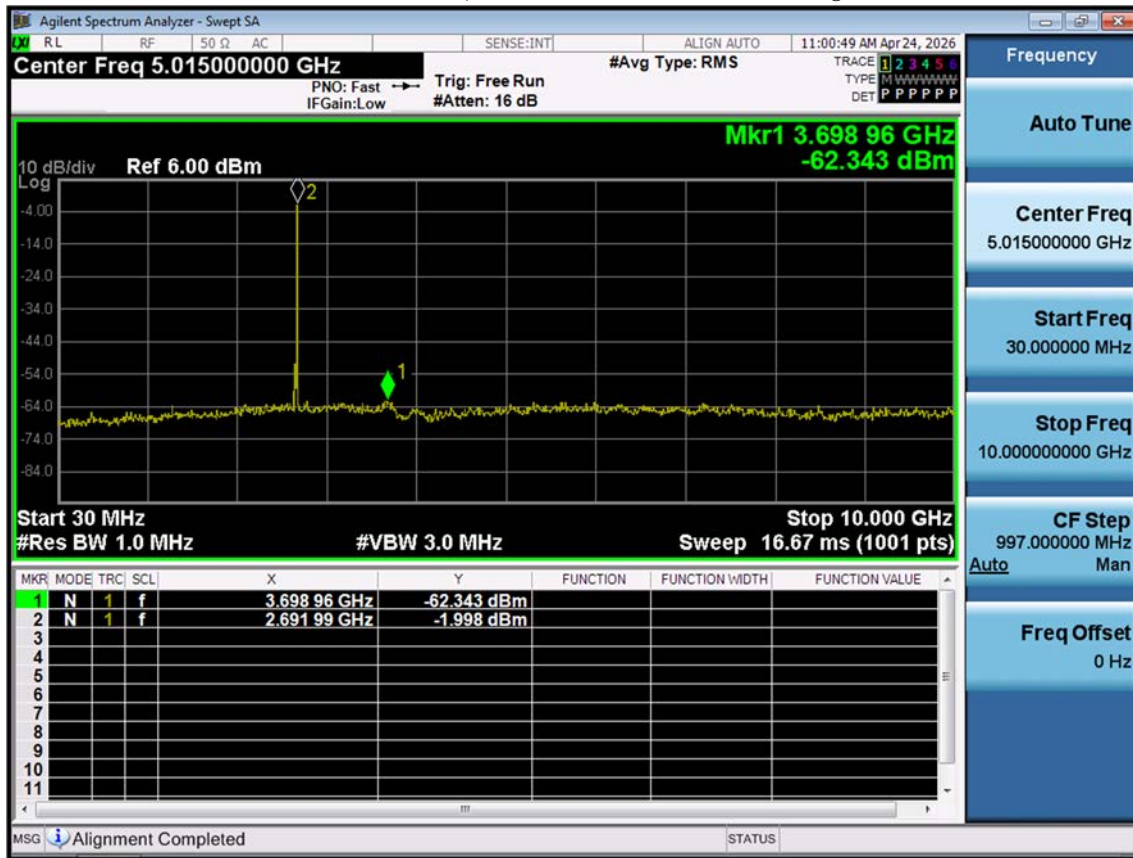

LTE B41_5 M_Conducted Spurious Emissions(Above10 G)_Low_QPSK_1RB



LTE B41_5 M_Conducted Spurious Emissions(Above10 G)_Mid_QPSK_1RB



LTE B41_5 M_Conducted Spurious Emissions(Above10 G)_High_QPSK_1RB



LTE B41_10 M_Conducted Spurious Emissions(Above10 G)_Low_QPSK_1RB



LTE B41_10 M_Conducted Spurious Emissions(Above10 G)_Mid_QPSK_1RB



LTE B41_10 M_Conducted Spurious Emissions(Above10 G)_High_QPSK_1RB



LTE B41_15 M_Conducted Spurious Emissions(Above10 G)_Low_QPSK_1RB



LTE B41_15 M_Conducted Spurious Emissions(Above10 G)_Mid_QPSK_1RB



LTE B41_15 M_Conducted Spurious Emissions(Above10 G)_High_QPSK_1RB



LTE B41_20 M_Conducted Spurious Emissions(Above10 G)_Low_QPSK_1RB



LTE B41_20 M_Conducted Spurious Emissions(Above10 G)_Mid_QPSK_1RB



LTE B41_20 M_Conducted Spurious Emissions(Above10 G)_High_QPSK_1RB



10.4 CHANNEL EDGE

LTE B41_5 M_Channel Edge_Lower_Low_QPSK_1RB

