

TEST REPORT

FCC LTE B12 Test for SM-A276U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2604-FC015

DATE OF ISSUE
April 23, 2026

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2604-FC015

DATE OF ISSUE

April 23, 2026

Additional Model

SM-A276U1, SM-S276V

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-A276U

Date of Test

March 11, 2026 ~ April 22, 2026

FCC ID

A3LSMA276U

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 23, 2026	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1 MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
2.4. EQUIPMENT.....	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 OCCUPIED BANDWIDTH	11
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.6 BAND EDGE	13
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.8 PEAK- TO- AVERAGE RATIO	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT.....	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION.....	22
8. TEST DATA.....	24
8.1 EFFECTIVE RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS.....	26
8.3 PEAK-TO-AVERAGE RATIO	27
8.4 OCCUPIED BANDWIDTH	28
8.5 CONDUCTED SPURIOUS EMISSIONS	29
8.6 BAND EDGE	29
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	30
9. TEST PLOTS.....	42
9.1 PEAK-TO-AVERAGE RATIO	43
9.2 OCCUPIED BANDWIDTH.....	59
9.3 CONDUCTED SPURIOUS EMISSIONS	75
9.4 BAND EDGE	87
10. ANNEX A_ TEST SETUP PHOTO	115

MEASUREMENT REPORT

1. GENERAL INFORMATION

Model(s):	SM-A276U
Additional Model(s)	SM-A276U1, SM-S276V
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12 (5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12 (10 MHz))
Serial number:	Radiated : R37L300TFEN Conducted : 9aece160ab127ece
Antenna Information	Please refer to the Antenna Specification document.

1.1 MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 12 (1.4)	699.7 – 715.3	1M10G7D	QPSK	0.063	18.00
		1M10W7D	16-QAM	0.053	17.26
		1M09W7D	64-QAM	0.042	16.22
		1M10W7D	256-QAM	0.021	13.23
LTE – Band 12 (3)	700.5 – 714.5	2M71G7D	QPSK	0.063	18.00
		2M71W7D	16-QAM	0.054	17.31
		2M72W7D	64-QAM	0.042	16.24
		2M72W7D	256-QAM	0.021	13.21
LTE – Band 12 (5)	701.5 – 713.5	4M51G7D	QPSK	0.064	18.05
		4M52W7D	16-QAM	0.053	17.27
		4M51W7D	64-QAM	0.042	16.25
		4M51W7D	256-QAM	0.021	13.14
LTE – Band 12 (10)	704.0 – 711.0	9M01G7D	QPSK	0.063	17.98
		9M00W7D	16-QAM	0.052	17.19
		8M98W7D	64-QAM	0.041	16.15
		9M00W7D	256-QAM	0.020	13.10

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

Please refer to the [2G3G] Test Report.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea.

Detailed description of test facility was submitted to the Commission and accepted dated February 26, 2026 (Registration Number: KR0032).

2.4. EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to ANSI/USEMCSC C63.2-2023, "American National Standard for Specifications of Electromagnetic Interference and Field Strength Measuring Instrumentation in the Frequency Range 9 kHz to 40 GHz".

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. No. of sweep points $> 2 \times$ span / RBW
4. Detector = Peak
5. Trace mode = Max Hold
6. The trace was allowed to stabilize
7. Test channel : Low/ Middle/ High
8. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

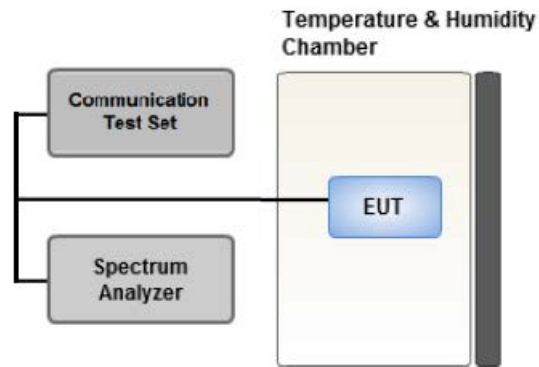

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

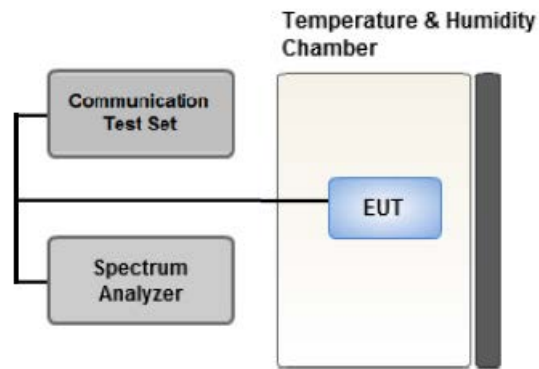

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep = 1001

3.6 BAND EDGE

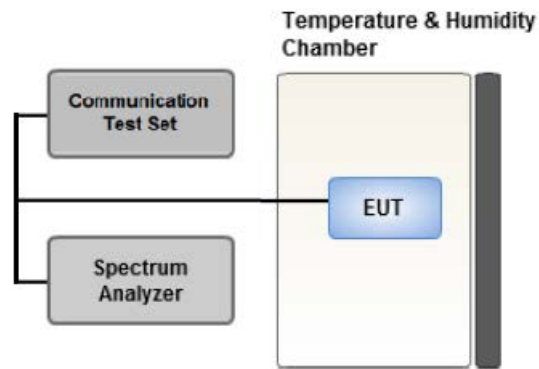

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time > (Number of Points) $\times$ (Symbol Period)
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

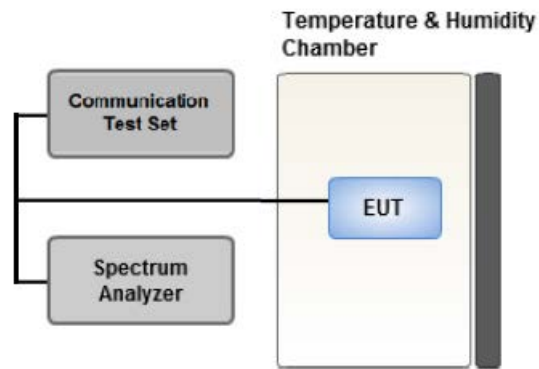

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.


2. Primary Supply Voltage:

- . - Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- . - For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 PEAK- TO- AVERAGE RATIO

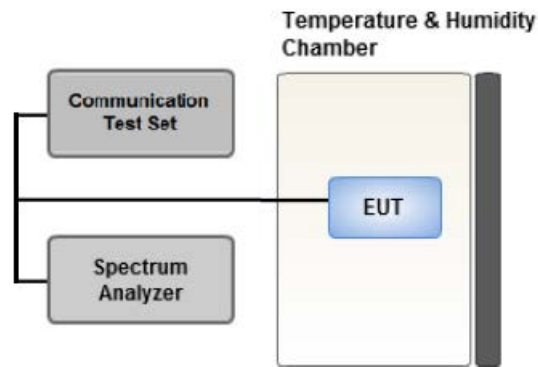

Test setup

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - . - for continuous transmissions, set to 1 ms,
 - . - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

Test Notes

1. This test was performed using the spectrum analyzer's CCDF function.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- Please refer to the table below.
- SM-A276U & additional models were tested and the worst case results are reported.
(Worst case : SM-A276U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Y
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - SM-A276U & additional models were tested and the worst case results are reported.
- (Worst case : SM-A276U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
PEAK- TO- AVERAGE RATIO	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
Band Edge	QPSK	1.4, 3, 5, 10	Low, High	Full RB	0
			Low, Mid, High	1	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	INPUT1 + 1GHz HPF + LNA	HCT CO., LTD.,	F2L2	12/01/2026	Annual
RF Switching System	INPUT1 + 3GHz HPF + LNA	HCT CO., LTD.,	F2L3	12/01/2026	Annual
RF Switching System	INPUT1 + 7GHz HPF + LNA	HCT CO., LTD.,	F2L5	12/01/2026	Annual
RF Switching System	INPUT3 + 6GHz HPF + LNA	HCT CO., LTD.,	F2L14	12/01/2026	Annual
Broadband LNA	CBL18265035	CERNEX	22966	10/21/2026	Annual
Broadband LNA	CBL26405040	CERNEX	25956	02/09/2027	Annual
POWER SPLITTER	11667B	Hewlett Packard	5001	04/01/2027	Annual
DC POWER SUPPLY	E3632A	Agilent	MY40010147	07/29/2026	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/05/2028	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/04/2027	Annual
Horn Antenna	BBHA 9120D	Schwarzbeck	03197	11/28/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	03201	11/28/2026	Biennial
Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
MXA SIGNAL ANALYZER	N9020A	Agilent	MY52090906	04/08/2027	Annual
20dB ATTENUATOR	8493C	HP	15233	12/10/2026	Annual
Signal Analyzer	FSV 40	ROHDE & SCHWARZ	101733	09/17/2026	Annual
Wireless Communications Set	E5515C	Agilent	MY48360800	07/29/2026	Annual
Loop Antenna	FMZB 1513	Schwarzbeck	1513-333	06/23/2027	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	00895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck Mess-Elektronik OHG	01135	08/19/2026	Biennial
Radio Communication Test Station	MT8000A	Anritsu	6272613402	08/18/2026	Annual
SIGNAL GENERATOR	SMB100A	ROHDE & SCHWARZ	177633	07/22/2026	Annual
PXA Signal Analyzer	N9030B	Keysight	MY55480167	05/14/2026	Annual
UXM 5G Wireless Test Platform	E7515B	Keysight	MY60101126	01/29/2027	Annual
Automation Software	FCC 2G/3G/4G Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC NR Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC LTE Radiated	HCT CO., LTD	-	-	-
Automation Software	FCC NR Radiated	HCT CO., LTD	-	-	-

Note:

- Equipment whose calibration due date was updated during the test period was not used between the previous due date and the update. All reported measurements were performed using equipment within valid calibration.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of ANSI C63.5-2017.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ kHz)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.11 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.73 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.54 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.86 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.44 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

-. The decision rule applies 'simple acceptance'

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(g)	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS <u>Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. Refer to the SAR report.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(g)	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
699.7	LTE B12 (1.4 MHz)	QPSK	-30.77	28.90	-9.65	1.29	V	< 3.00	0.063	17.96	1	5
		16-QAM	-31.47	28.20	-9.65	1.29	V		0.053	17.26		
		64-QAM	-32.51	27.16	-9.65	1.29	V		0.042	16.22		
		256-QAM	-35.50	24.17	-9.65	1.29	V		0.021	13.23		
707.5		QPSK	-30.71	28.95	-9.65	1.30	V		0.063	18.00	1	3
		16-QAM	-31.59	28.07	-9.65	1.30	V		0.052	17.12		
		64-QAM	-32.65	27.01	-9.65	1.30	V		0.040	16.06		
		256-QAM	-35.60	24.06	-9.65	1.30	V		0.020	13.11		
715.3		QPSK	-31.29	28.67	-9.65	1.32	V		0.059	17.70	1	0
		16-QAM	-31.99	27.97	-9.65	1.32	V		0.050	17.00		
		64-QAM	-32.98	26.98	-9.65	1.32	V		0.040	16.01		
		256-QAM	-36.04	23.92	-9.65	1.32	V		0.020	12.95		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
700.5	LTE B12 (3 MHz)	QPSK	-30.73	28.94	-9.65	1.29	V	< 3.00	0.063	18.00	1	14
		16-QAM	-31.42	28.25	-9.65	1.29	V		0.054	17.31		
		64-QAM	-32.49	27.18	-9.65	1.29	V		0.042	16.24		
		256-QAM	-35.52	24.15	-9.65	1.29	V		0.021	13.21		
707.5		QPSK	-30.77	28.89	-9.65	1.30	V		0.062	17.94	1	0
		16-QAM	-31.61	28.05	-9.65	1.30	V		0.051	17.10		
		64-QAM	-32.57	27.09	-9.65	1.30	V		0.041	16.14		
		256-QAM	-35.70	23.96	-9.65	1.30	V		0.020	13.01		
714.5		QPSK	-31.11	28.80	-9.65	1.31	V		0.061	17.84	1	0
		16-QAM	-31.82	28.09	-9.65	1.31	V		0.052	17.13		
		64-QAM	-32.93	26.98	-9.65	1.31	V		0.040	16.02		
		256-QAM	-36.04	23.87	-9.65	1.31	V		0.020	12.91		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
701.5	LTE B12 (5 MHz)	QPSK	-30.58	28.99	-9.65	1.29	V	< 3.00	0.064	18.05	1	13
		16-QAM	-31.36	28.21	-9.65	1.29	V		0.053	17.27		
		64-QAM	-32.38	27.19	-9.65	1.29	V		0.042	16.25		
		256-QAM	-35.49	24.08	-9.65	1.29	V		0.021	13.14		
707.5		QPSK	-30.81	28.85	-9.65	1.30	V		0.062	17.90	1	0
		16-QAM	-31.52	28.14	-9.65	1.30	V		0.052	17.19		
		64-QAM	-32.56	27.10	-9.65	1.30	V		0.041	16.15		
		256-QAM	-35.70	23.96	-9.65	1.30	V		0.020	13.01		
713.5		QPSK	-30.88	28.91	-9.65	1.31	V		0.062	17.95	1	0
		16-QAM	-31.68	28.11	-9.65	1.31	V		0.052	17.15		
		64-QAM	-32.77	27.02	-9.65	1.31	V		0.040	16.06		
		256-QAM	-35.85	23.94	-9.65	1.31	V		0.020	12.98		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
704.0	LTE B12 (10 MHz)	QPSK	-30.72	28.80	-9.65	1.29	V	< 3.00	0.061	17.86	1	0
		16-QAM	-31.51	28.01	-9.65	1.29	V		0.051	17.07		
		64-QAM	-32.55	26.97	-9.65	1.29	V		0.040	16.03		
		256-QAM	-35.58	23.94	-9.65	1.29	V		0.020	13.00		
707.5		QPSK	-30.73	28.93	-9.65	1.30	V		0.063	17.98	1	0
		16-QAM	-31.52	28.14	-9.65	1.30	V		0.052	17.19		
		64-QAM	-32.56	27.10	-9.65	1.30	V		0.041	16.15		
		256-QAM	-35.61	24.05	-9.65	1.30	V		0.020	13.10		
711.0		QPSK	-30.79	28.69	-9.65	1.30	V		0.059	17.74	1	0
		16-QAM	-31.56	27.92	-9.65	1.30	V		0.050	16.97		
		64-QAM	-32.60	26.88	-9.65	1.30	V		0.039	15.93		
		256-QAM	-35.77	23.71	-9.65	1.30	V		0.019	12.76		

8.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B12
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
23035 (701.5)	1 403.00	-50.80	7.79	-63.86	1.86	V	-57.93	1	13
		-49.81		-62.87		H	-56.94		
	2 104.50	-52.16	9.49	-63.54	2.34	V	-56.39		
		-51.94		-63.32		H	-56.17		
	2 806.00	-52.59	10.64	-63.14	2.68	V	-55.18		
		-52.10		-62.65		H	-54.69		
23095 (707.5)	1 415.00	-50.50	7.84	-63.51	1.87	V	-57.54	1	0
		-51.46		-64.47		H	-58.50		
	2 122.50	-52.02	9.36	-63.45	2.28	V	-56.37		
		-51.41		-62.84		H	-55.76		
	2 830.00	-52.40	10.73	-62.93	2.70	V	-54.90		
		-53.28		-63.81		H	-55.78		
23155 (713.5)	1 427.00	-51.60	7.88	-64.58	1.87	V	-58.57	1	0
		-51.70		-64.68		H	-58.67		
	2 140.50	-52.45	9.26	-63.91	2.24	V	-56.89		
		-52.54		-64.00		H	-56.98		
	2 854.00	-52.57	10.79	-63.01	2.74	V	-54.96		
		-51.69		-62.13		H	-54.08		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)	Limit (dB)
LTE B12	1.4 MHz	707.5	QPSK	Full RB		5.65	13.00
			16-QAM		6.38		
			64-QAM		6.65		
			256-QAM		6.68		
	3 MHz		QPSK		5.52		
			16-QAM		6.38		
			64-QAM		6.67		
			256-QAM		6.65		
	5 MHz		QPSK		5.58		
			16-QAM		6.36		
			64-QAM		6.62		
			256-QAM		6.62		
	10 MHz		QPSK		5.62		
			16-QAM		6.36		
			64-QAM		6.60		
			256-QAM		6.61		

Note:

1. P.A.P.R is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
LTE B12	1.4 MHz	707.5	QPSK	6	0	1.0988
			16-QAM			1.1007
			64-QAM			1.0941
			256-QAM			1.0991
	3 MHz		QPSK	15		2.7102
			16-QAM			2.7120
			64-QAM			2.7209
			256-QAM			2.7148
	5 MHz		QPSK	25		4.5071
			16-QAM			4.5182
			64-QAM			4.5117
			256-QAM			4.5110
	10 MHz		QPSK	50		9.0055
			16-QAM			8.9979
			64-QAM			8.9821
			256-QAM			8.9979

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
LTE B12	1.4	699.7	3.7089	27.976	-57.770	-29.794	-13.00
		707.5	2.3630	27.976	-57.461	-29.485	
		715.3	3.6990	27.976	-57.264	-29.288	
	3	700.5	6.5404	28.591	-58.080	-29.489	
		707.5	3.6890	27.976	-58.039	-30.063	
		714.5	3.1706	27.976	-57.699	-29.723	
	5	701.5	6.6002	28.591	-57.659	-29.068	
		707.5	3.2104	27.976	-57.928	-29.952	
		713.5	6.2613	28.591	-57.503	-28.912	
	10	704.0	3.7089	27.976	-56.699	-28.723	
		707.5	3.7388	27.976	-57.585	-29.609	
		711.0	3.7189	27.976	-57.342	-29.366	

Note:

1. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Section 9.4.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>699,700,000 Hz</u>
CHANNEL:	<u>23017 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	699 700 002	0.0	0.000 000	0.000
100 %		-30	699 700 004	2.8	0.000 000	0.004
100 %		-20	699 700 003	1.4	0.000 000	0.002
100 %		-10	699 699 999	-2.4	0.000 000	-0.003
100 %		0	699 700 005	3.1	0.000 000	0.004
100 %		+10	699 700 000	-2.0	0.000 000	-0.003
100 %		+30	699 700 003	1.6	0.000 000	0.002
100 %		+40	699 699 999	-2.4	0.000 000	-0.003
100 %		+50	699 700 000	-1.8	0.000 000	-0.003
Batt. Endpoint	3.300	+20	699 699 997	-5.0	-0.000 001	-0.007

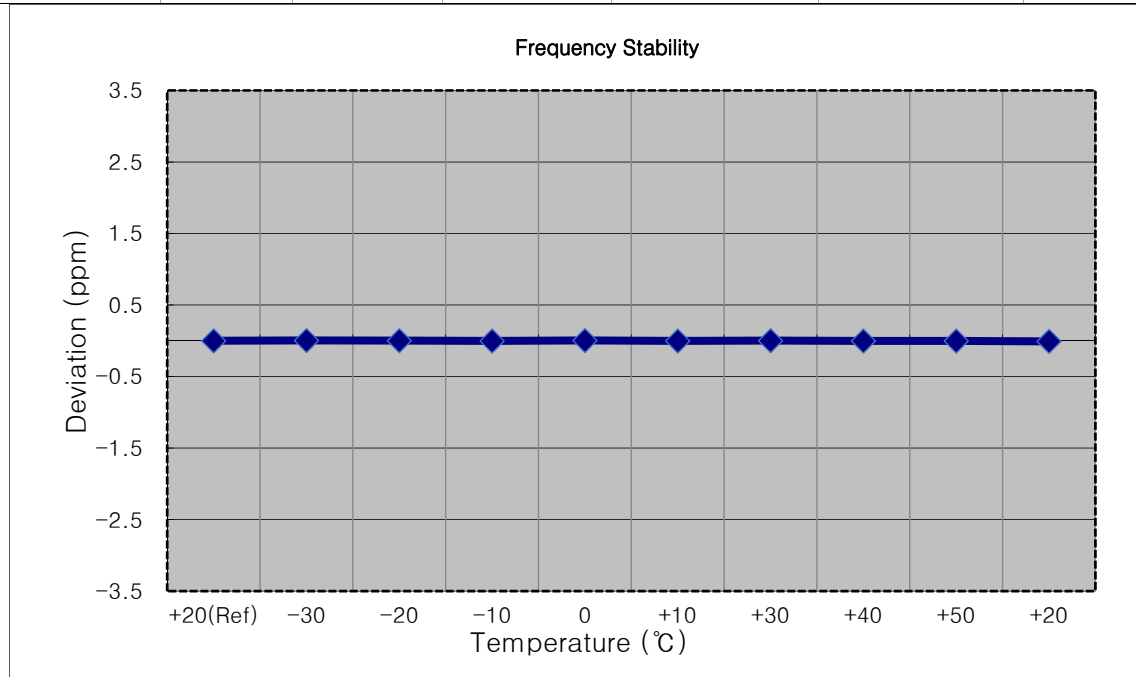


MODE: LTE B12
 OPERATING FREQUENCY: 700,500,000 Hz
 CHANNEL: 23025 (3 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	700 500 003	0.0	0.000 000	0.000
100 %		-30	700 500 001	-2.8	0.000 000	-0.004
100 %		-20	700 500 000	-3.7	-0.000 001	-0.005
100 %		-10	700 500 001	-2.3	0.000 000	-0.003
100 %		0	700 500 006	2.7	0.000 000	0.004
100 %		+10	700 500 006	2.5	0.000 000	0.004
100 %		+30	700 500 006	2.8	0.000 000	0.004
100 %		+40	700 500 007	3.6	0.000 001	0.005
100 %		+50	700 500 001	-2.1	0.000 000	-0.003
Batt. Endpoint	3.300	+20	700 500 000	-3.7	-0.000 001	-0.005

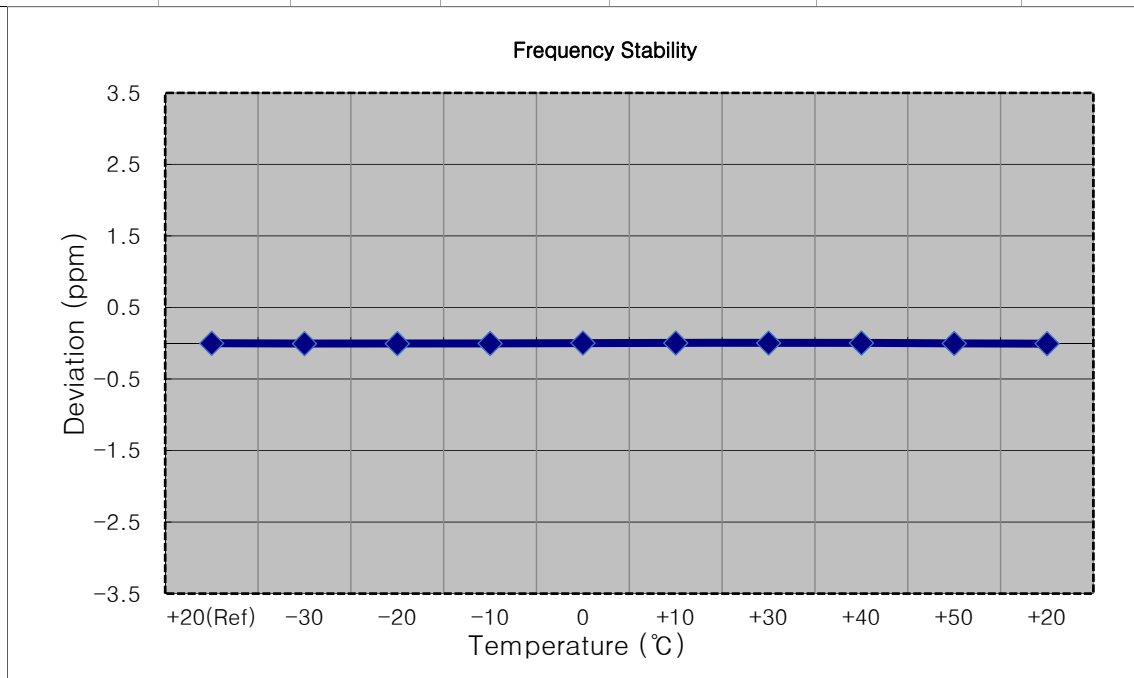


MODE: LTE B12
 OPERATING FREQUENCY: 701,500,000 Hz
 CHANNEL: 23035 (5 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	701 499 997	0.0	0.000 000	0.000
100 %		-30	701 499 995	-1.8	0.000 000	-0.003
100 %		-20	701 499 993	-3.9	-0.000 001	-0.006
100 %		-10	701 499 999	2.7	0.000 000	0.004
100 %		0	701 499 994	-2.5	0.000 000	-0.004
100 %		+10	701 499 999	2.7	0.000 000	0.004
100 %		+30	701 499 995	-2.1	0.000 000	-0.003
100 %		+40	701 500 000	3.2	0.000 000	0.005
100 %		+50	701 499 992	-4.5	-0.000 001	-0.006
Batt. Endpoint	3.300	+20	701 499 999	2.6	0.000 000	0.004

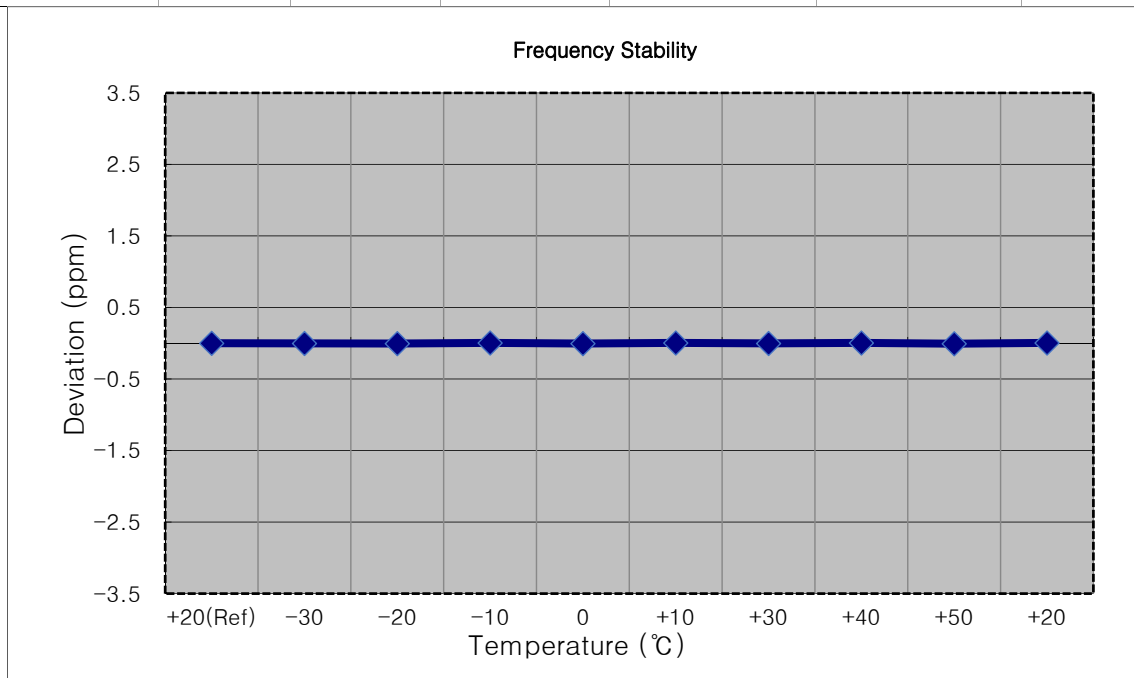


MODE: LTE B12
 OPERATING FREQUENCY: 704,000,000 Hz
 CHANNEL: 23060 (10 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	704 000 005	0.0	0.000 000	0.000
100 %		-30	704 000 012	6.3	0.000 001	0.009
100 %		-20	704 000 010	4.9	0.000 001	0.007
100 %		-10	704 000 011	5.4	0.000 001	0.008
100 %		0	704 000 011	5.2	0.000 001	0.007
100 %		+10	704 000 011	5.5	0.000 001	0.008
100 %		+30	704 000 010	4.9	0.000 001	0.007
100 %		+40	704 000 010	4.6	0.000 001	0.007
100 %		+50	704 000 009	4.1	0.000 001	0.006
Batt. Endpoint	3.300	+20	704 000 010	4.3	0.000 001	0.006

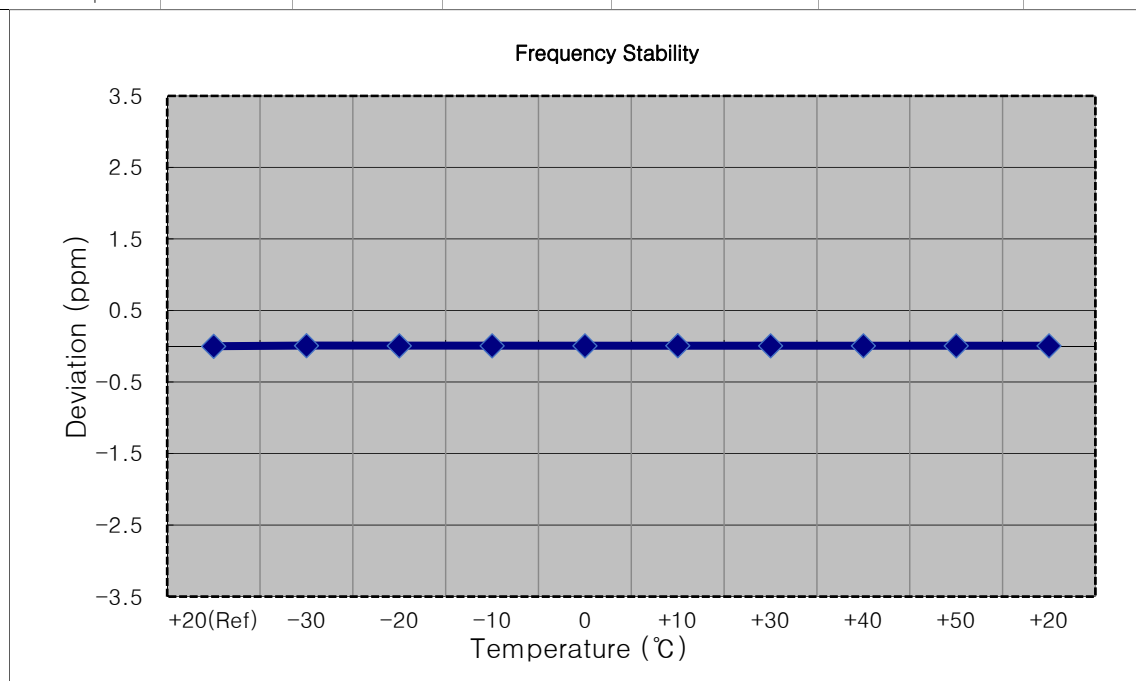


MODE: LTE B12
 OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23095 (1.4 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	707 500 002	0.0	0.000 000	0.000
100 %		-30	707 500 000	-2.1	0.000 000	-0.003
100 %		-20	707 500 000	-2.2	0.000 000	-0.003
100 %		-10	707 500 000	-2.0	0.000 000	-0.003
100 %		0	707 500 003	1.5	0.000 000	0.002
100 %		+10	707 499 998	-3.3	0.000 000	-0.005
100 %		+30	707 500 001	-0.9	0.000 000	-0.001
100 %		+40	707 500 003	1.2	0.000 000	0.002
100 %		+50	707 500 000	-1.8	0.000 000	-0.003
Batt. Endpoint	3.300	+20	707 500 000	-2.1	0.000 000	-0.003

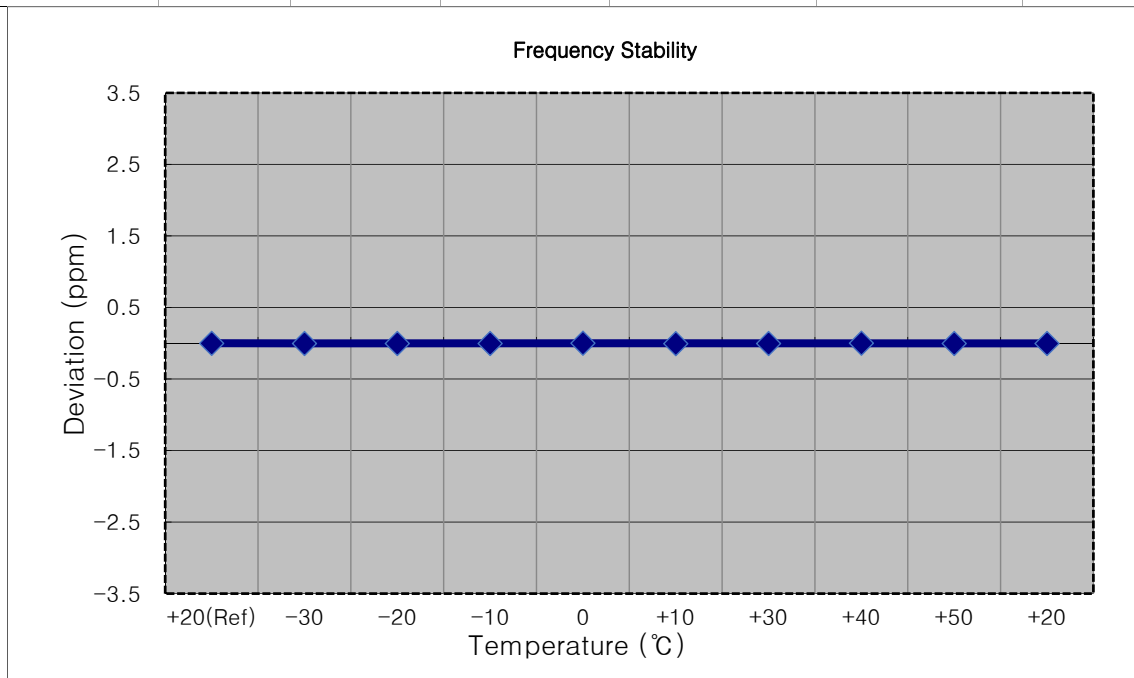


☐ MODE: LTE B12
☐ OPERATING FREQUENCY: 707,500,000 Hz
☐ CHANNEL: 23095 (3 MHz)
☐ REFERENCE VOLTAGE: 3.880 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	707 500 002	0.0	0.000 000	0.000
100 %		-30	707 500 001	-1.6	0.000 000	-0.002
100 %		-20	707 500 004	1.6	0.000 000	0.002
100 %		-10	707 500 004	2.1	0.000 000	0.003
100 %		0	707 499 999	-3.1	0.000 000	-0.004
100 %		+10	707 500 006	4.3	0.000 001	0.006
100 %		+30	707 500 008	5.8	0.000 001	0.008
100 %		+40	707 500 006	3.9	0.000 001	0.006
100 %		+50	707 500 005	3.1	0.000 000	0.004
Batt. Endpoint	3.300	+20	707 500 006	4.2	0.000 001	0.006

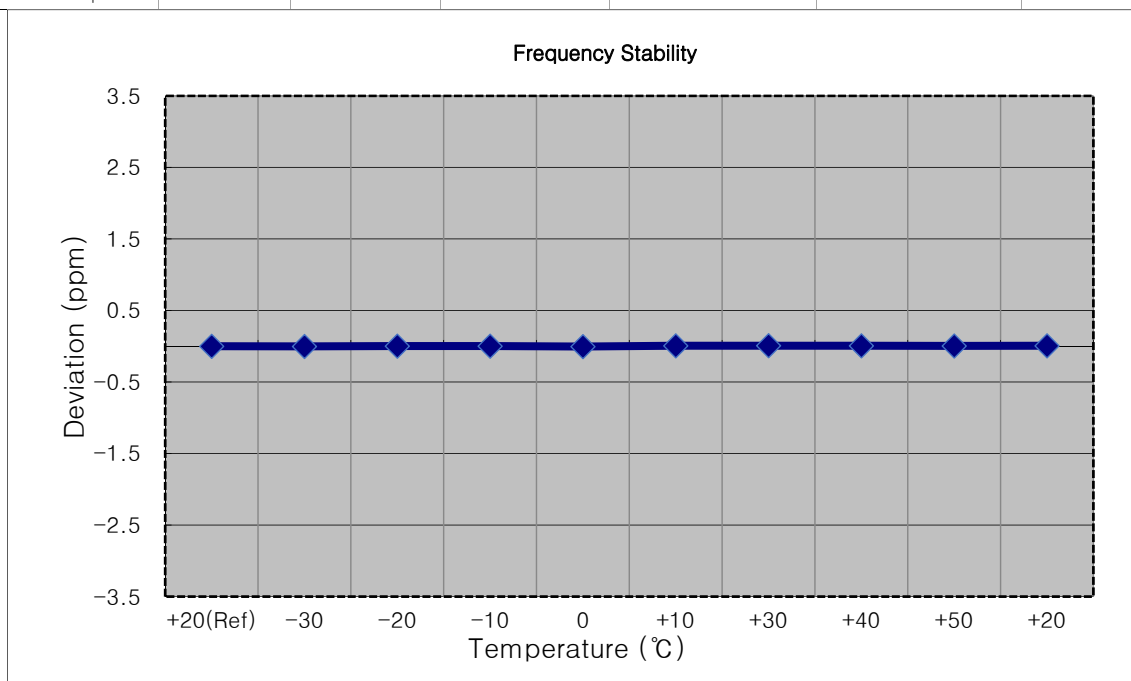


MODE: LTE B12
 OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23095 (5 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	707 500 003	0.0	0.000 000	0.000
100 %		-30	707 500 005	2.4	0.000 000	0.003
100 %		-20	707 500 005	2.2	0.000 000	0.003
100 %		-10	707 500 006	3.0	0.000 000	0.004
100 %		0	707 500 006	2.8	0.000 000	0.004
100 %		+10	707 500 005	1.8	0.000 000	0.003
100 %		+30	707 500 005	2.1	0.000 000	0.003
100 %		+40	707 500 005	2.1	0.000 000	0.003
100 %		+50	707 500 006	2.8	0.000 000	0.004
Batt. Endpoint	3.300	+20	707 499 999	-3.4	0.000 000	-0.005

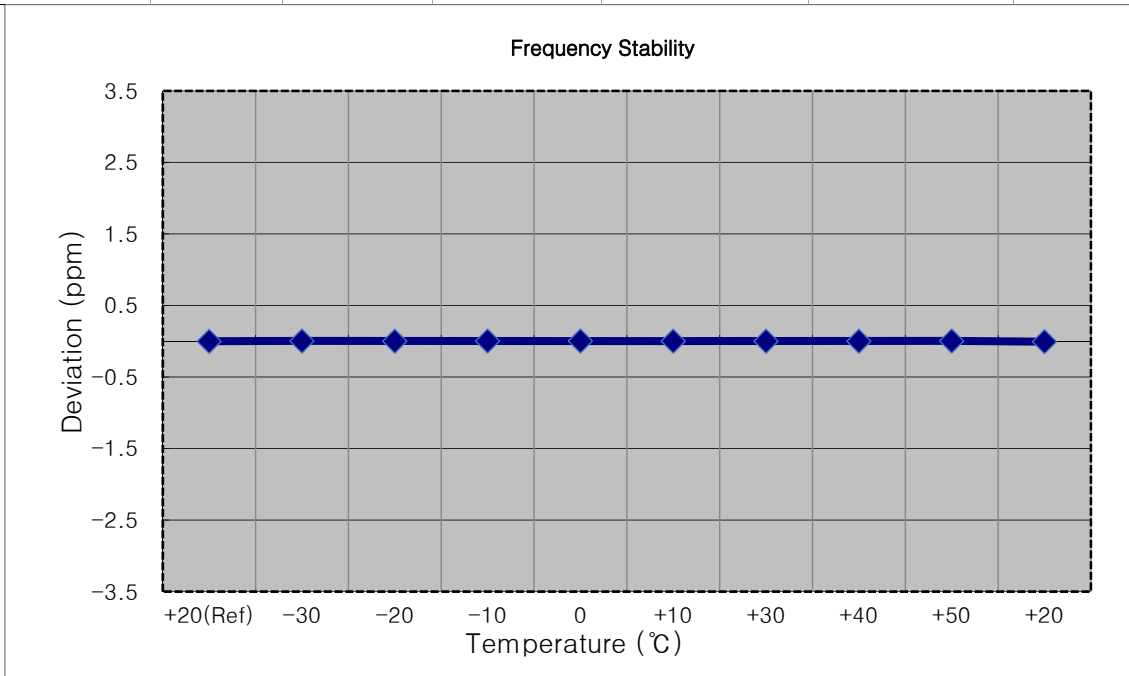


MODE: LTE B12
 OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23095 (10 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	707 500 005	0.0	0.000 000	0.000
100 %		-30	707 500 011	5.6	0.000 001	0.008
100 %		-20	707 500 011	5.7	0.000 001	0.008
100 %		-10	707 500 008	2.9	0.000 000	0.004
100 %		0	707 500 009	3.6	0.000 001	0.005
100 %		+10	707 500 009	3.6	0.000 001	0.005
100 %		+30	707 500 011	5.5	0.000 001	0.008
100 %		+40	707 500 010	4.9	0.000 001	0.007
100 %		+50	707 500 009	4.0	0.000 001	0.006
Batt. Endpoint	3.300	+20	707 500 009	3.2	0.000 000	0.005

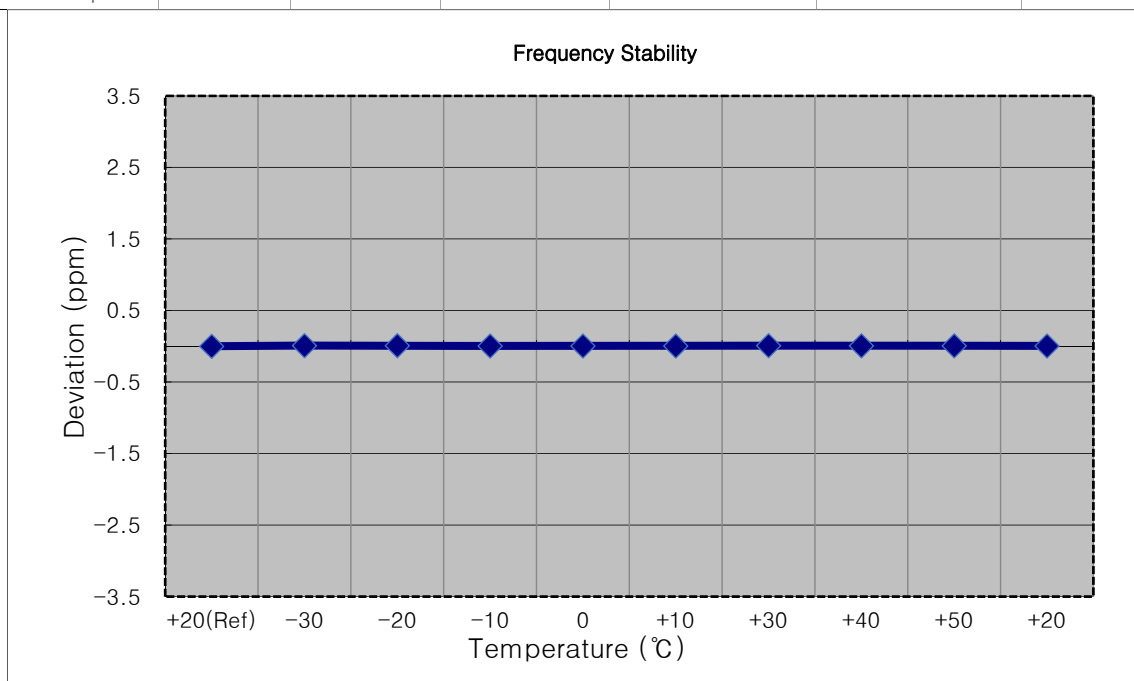


MODE: LTE B12
 OPERATING FREQUENCY: 715,300,000 Hz
 CHANNEL: 23173 (1.4 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	715 300 003	0.0	0.000 000	0.000
100 %		-30	715 300 002	-1.3	0.000 000	-0.002
100 %		-20	715 300 000	-2.5	0.000 000	-0.003
100 %		-10	715 300 000	-2.7	0.000 000	-0.004
100 %		0	715 300 002	-1.3	0.000 000	-0.002
100 %		+10	715 300 001	-1.9	0.000 000	-0.003
100 %		+30	715 300 001	-2.0	0.000 000	-0.003
100 %		+40	715 300 000	-3.2	0.000 000	-0.004
100 %		+50	715 300 006	3.2	0.000 000	0.004
Batt. Endpoint	3.300	+20	715 300 002	-1.4	0.000 000	-0.002

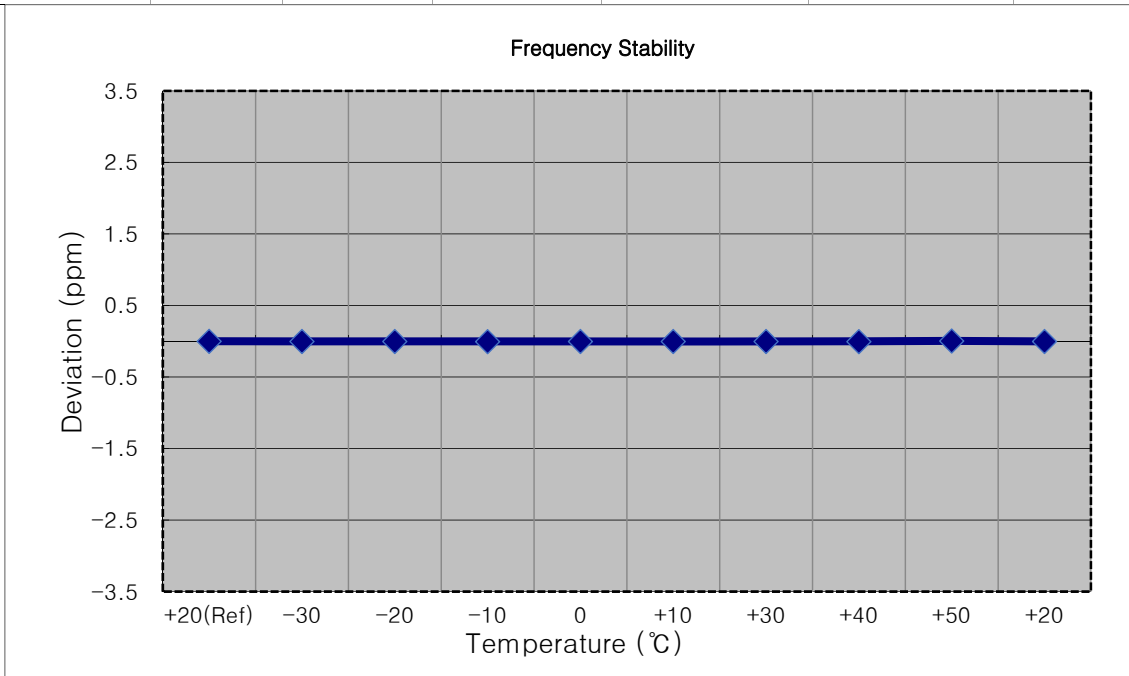


MODE: LTE B12
 OPERATING FREQUENCY: 714,500,000 Hz
 CHANNEL: 23165 (3 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	714 499 993	0.0	0.000 000	0.000
100 %		-30	714 500 006	13.1	0.000 002	0.018
100 %		-20	714 499 984	-9.0	-0.000 001	-0.013
100 %		-10	714 500 001	8.1	0.000 001	0.011
100 %		0	714 499 990	-3.3	0.000 000	-0.005
100 %		+10	714 499 999	6.3	0.000 001	0.009
100 %		+30	714 499 999	6.1	0.000 001	0.009
100 %		+40	714 499 986	-7.3	-0.000 001	-0.010
100 %		+50	714 499 987	-6.0	-0.000 001	-0.008
Batt. Endpoint	3.300	+20	714 499 985	-7.9	-0.000 001	-0.011

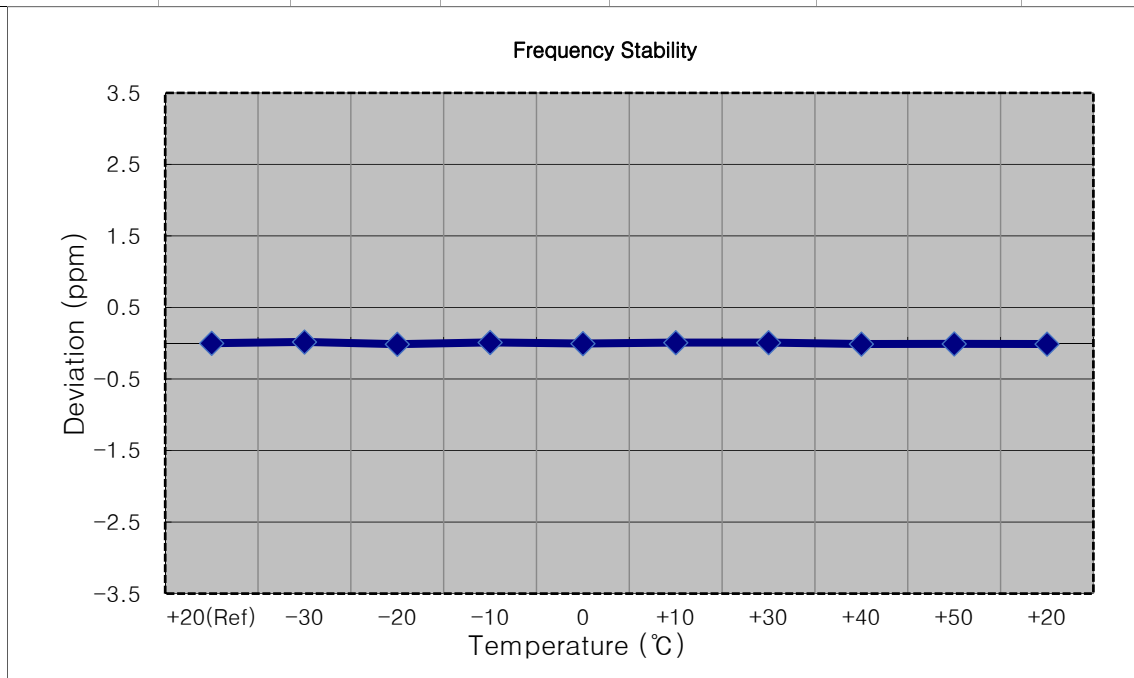


MODE: LTE B12
 OPERATING FREQUENCY: 713,500,000 Hz
 CHANNEL: 23155 (5 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	713 499 992	0.0	0.000 000	0.000
100 %		-30	713 499 987	-5.7	-0.000 001	-0.008
100 %		-20	713 499 986	-6.0	-0.000 001	-0.008
100 %		-10	713 499 988	-4.2	-0.000 001	-0.006
100 %		0	713 499 987	-5.8	-0.000 001	-0.008
100 %		+10	713 499 987	-5.8	-0.000 001	-0.008
100 %		+30	713 499 985	-7.3	-0.000 001	-0.010
100 %		+40	713 499 987	-5.6	-0.000 001	-0.008
100 %		+50	713 499 986	-6.2	-0.000 001	-0.009
Batt. Endpoint	3.300	+20	713 499 988	-4.8	-0.000 001	-0.007

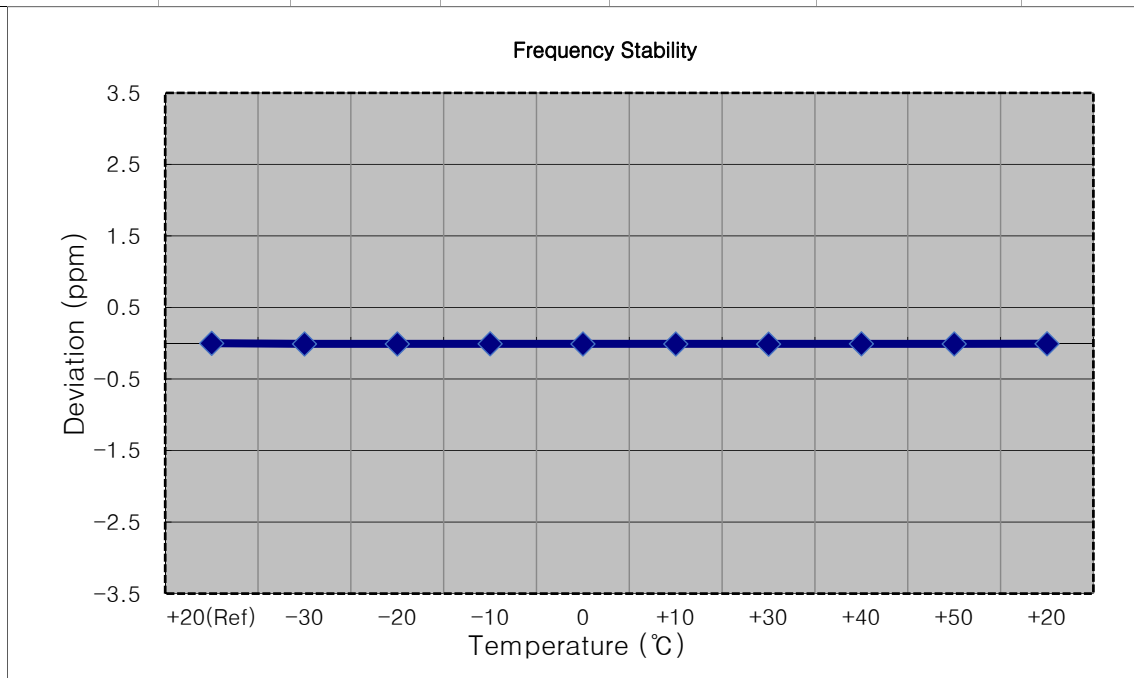

MODE: LTE B12
 OPERATING FREQUENCY: 711,000,000 Hz
 CHANNEL: 23130 (10 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band


Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.880	+20(Ref)	710 999 993	0.0	0.000 000	0.000
100 %		-30	710 999 986	-7.6	-0.000 001	-0.011
100 %		-20	710 999 985	-7.7	-0.000 001	-0.011
100 %		-10	710 999 987	-5.7	-0.000 001	-0.008
100 %		0	710 999 987	-6.1	-0.000 001	-0.009
100 %		+10	710 999 988	-5.3	-0.000 001	-0.007
100 %		+30	710 999 988	-4.7	-0.000 001	-0.007
100 %		+40	710 999 988	-5.1	-0.000 001	-0.007
100 %		+50	710 999 988	-5.2	-0.000 001	-0.007
Batt. Endpoint	3.300	+20	710 999 989	-4.4	-0.000 001	-0.006

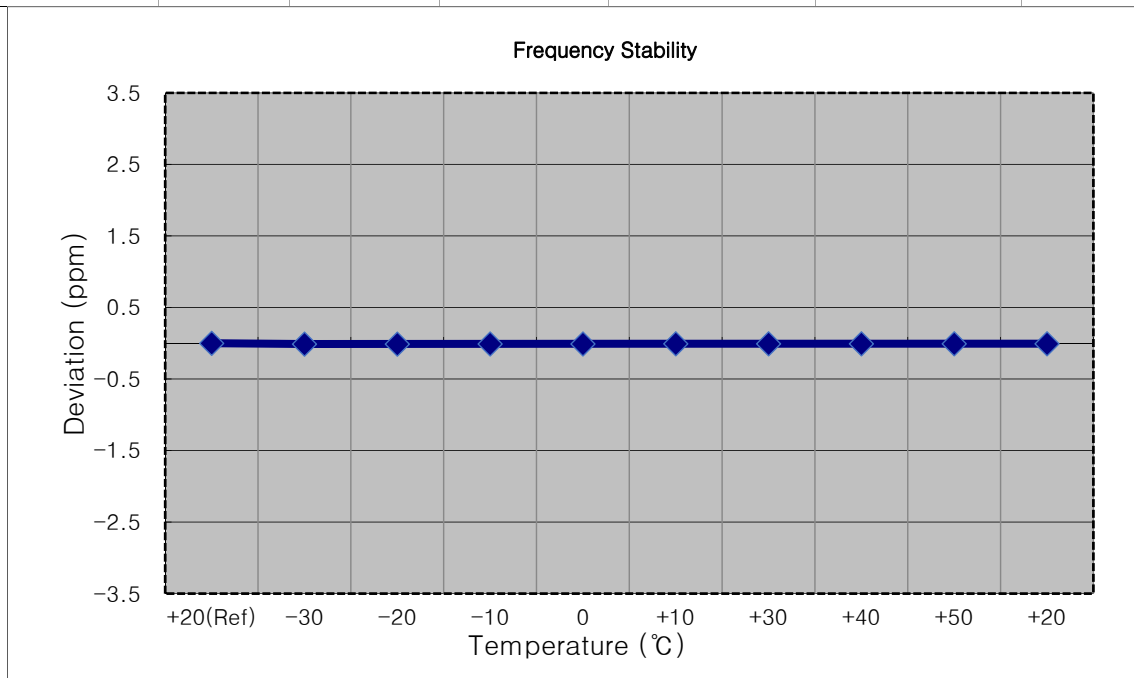


9. TEST PLOTS

9.1 PEAK-TO-AVERAGE RATIO


LTE B12_1.4 M_PAR_Mid_QPSK_FullRB

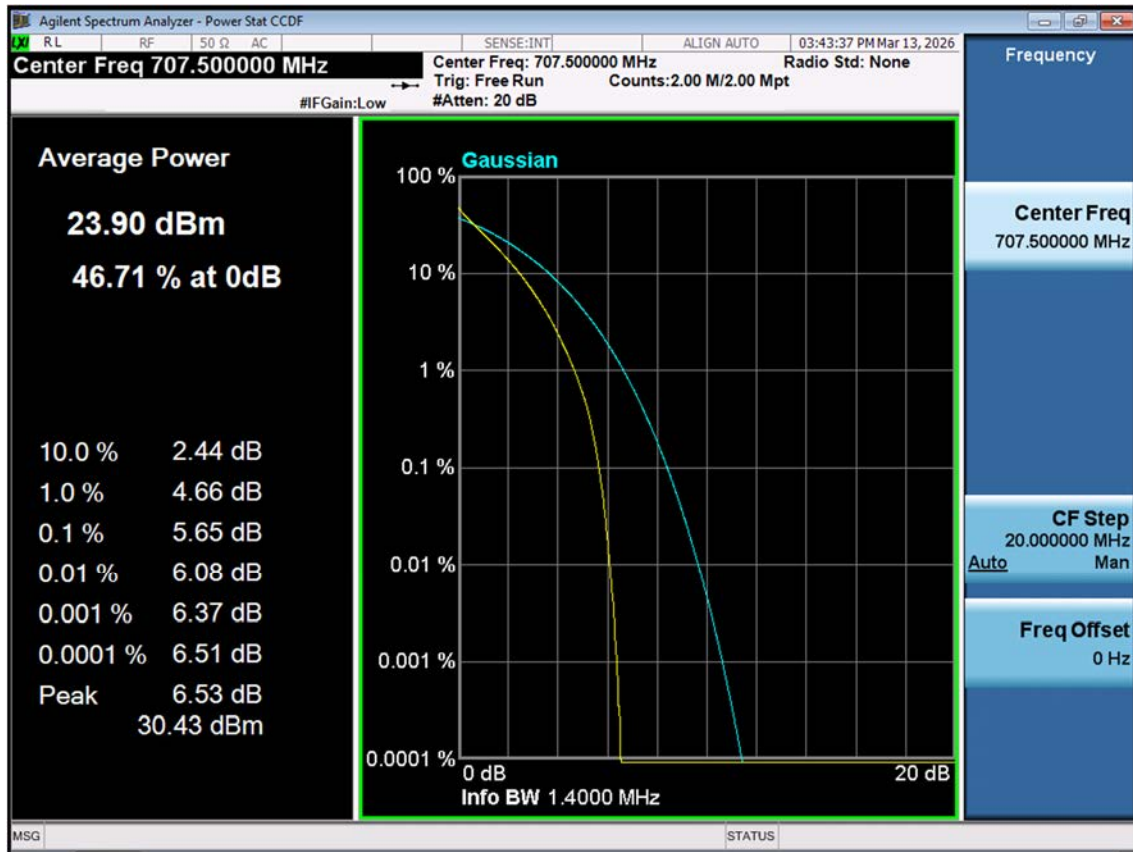


LTE B12_1.4 M_PAR_Mid_16QAM_FullRB

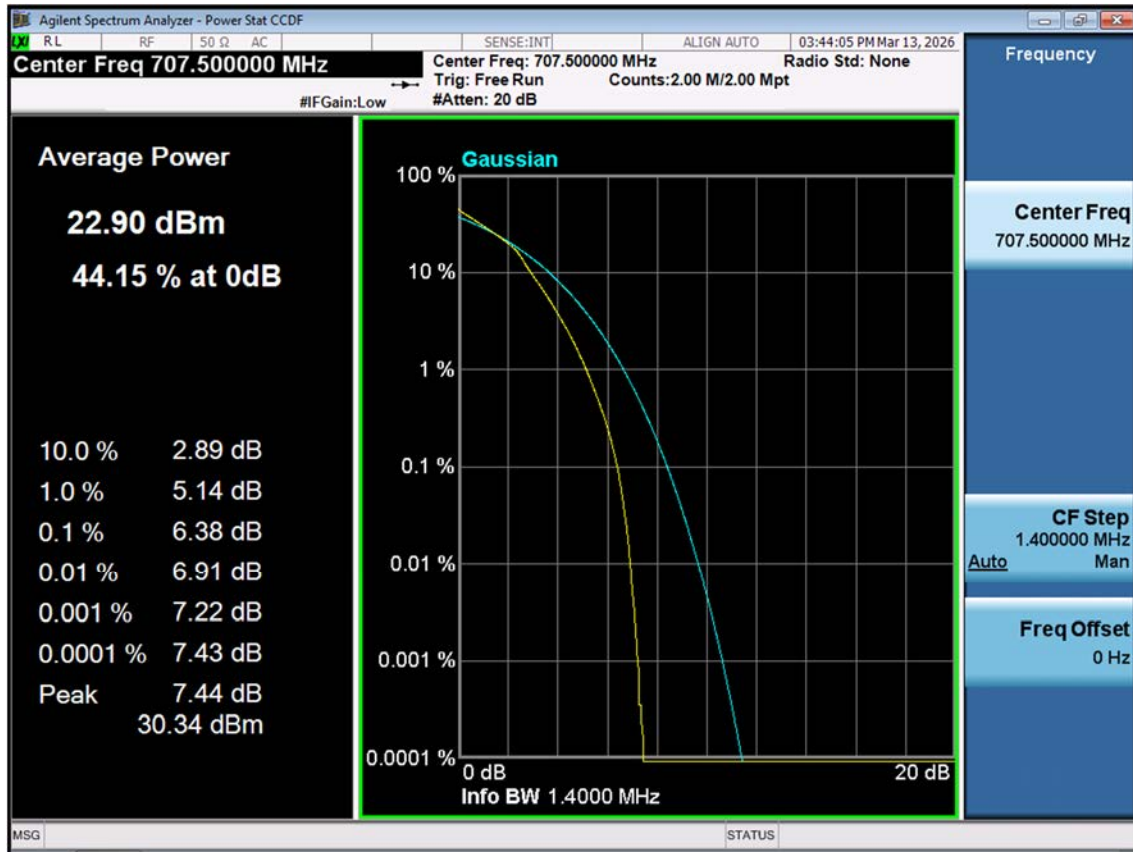


LTE B12_1.4 M_PAR_Mid_64QAM_FullRB

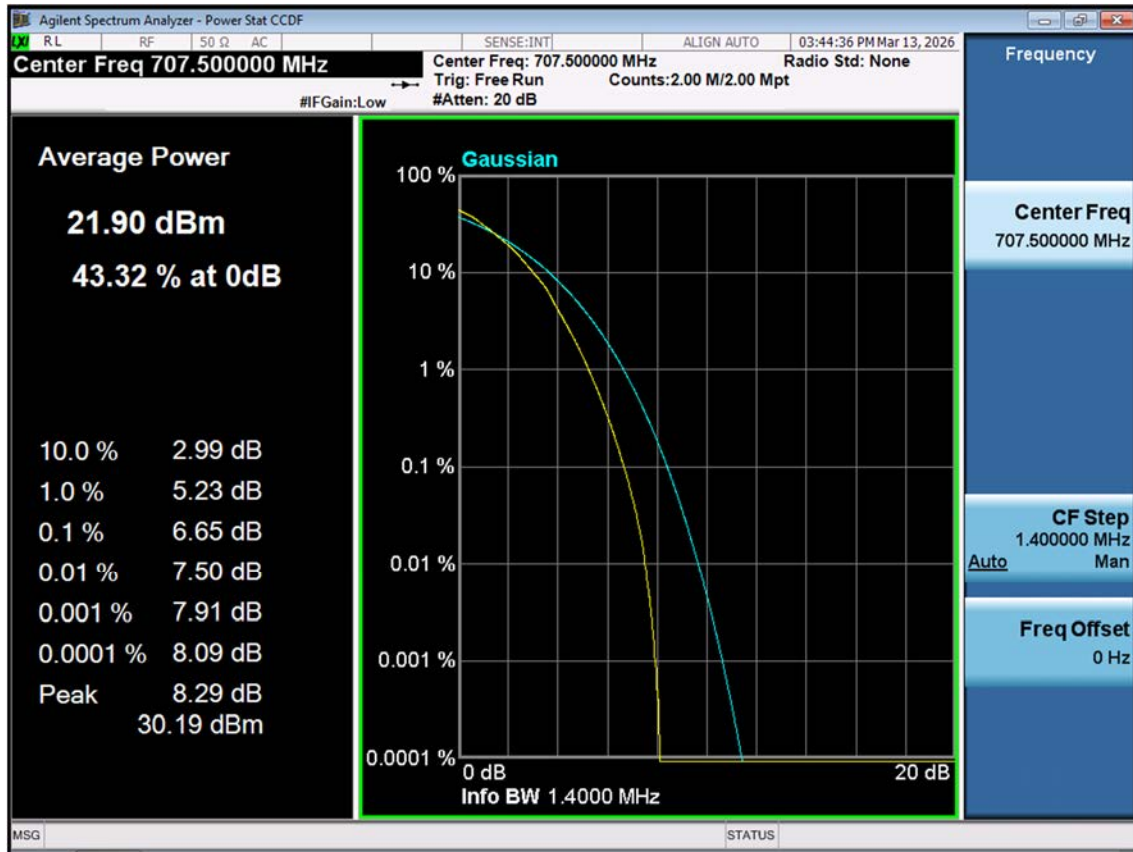


LTE B12_1.4 M_PAR_Mid_256QAM_FullRB

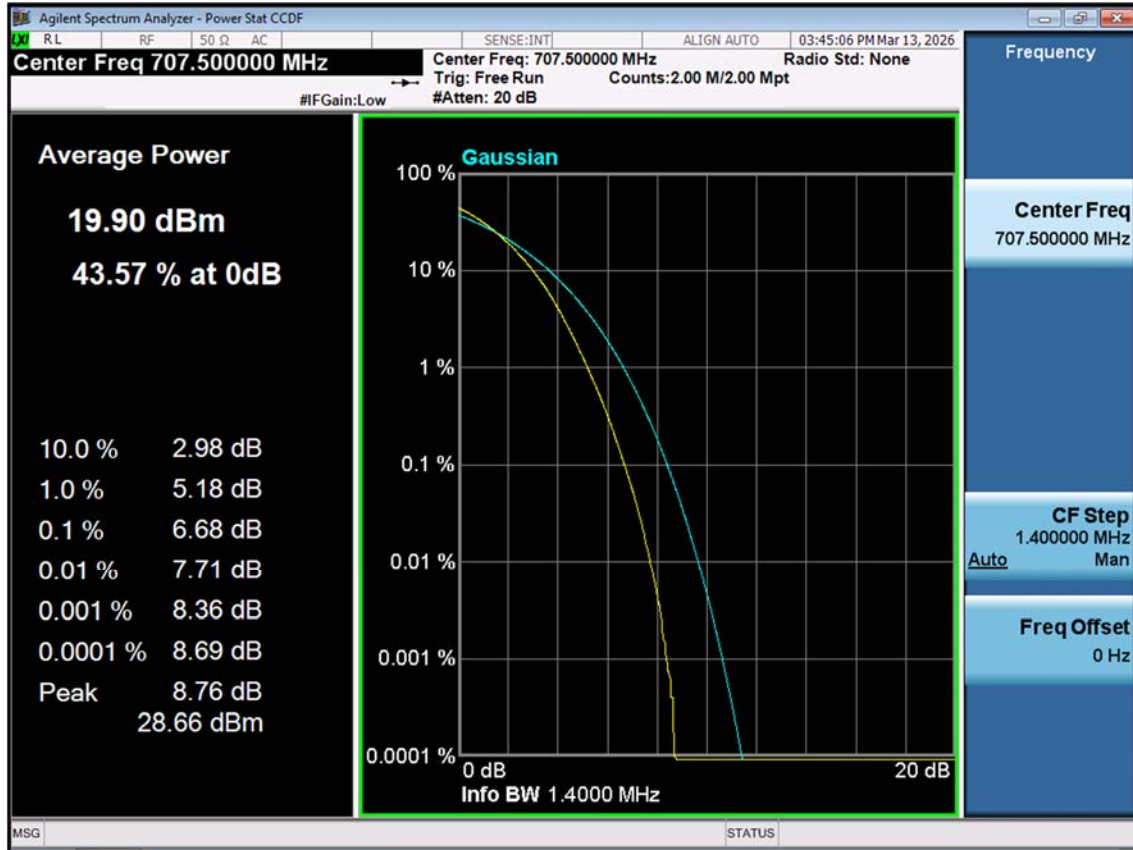


LTE B12_3 M_PAR_Mid_QPSK_FullRB

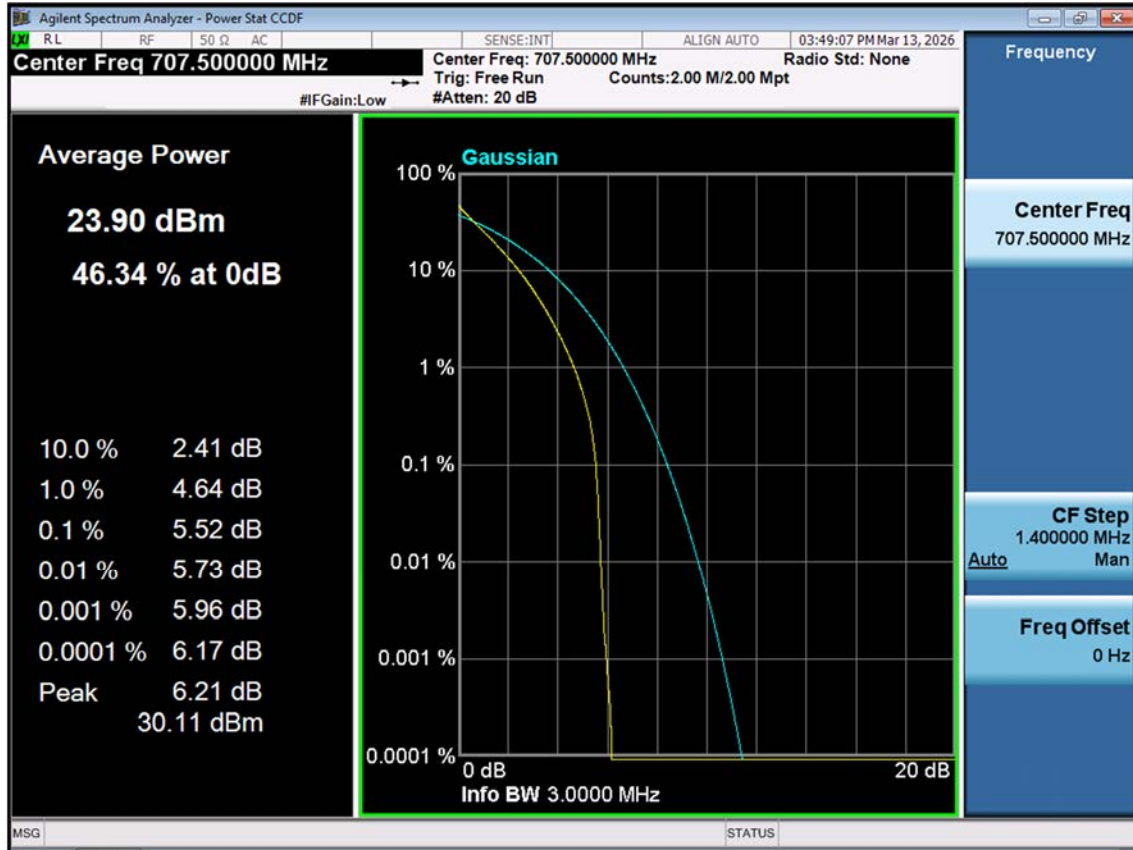


LTE B12_3 M_PAR_Mid_16QAM_FullRB

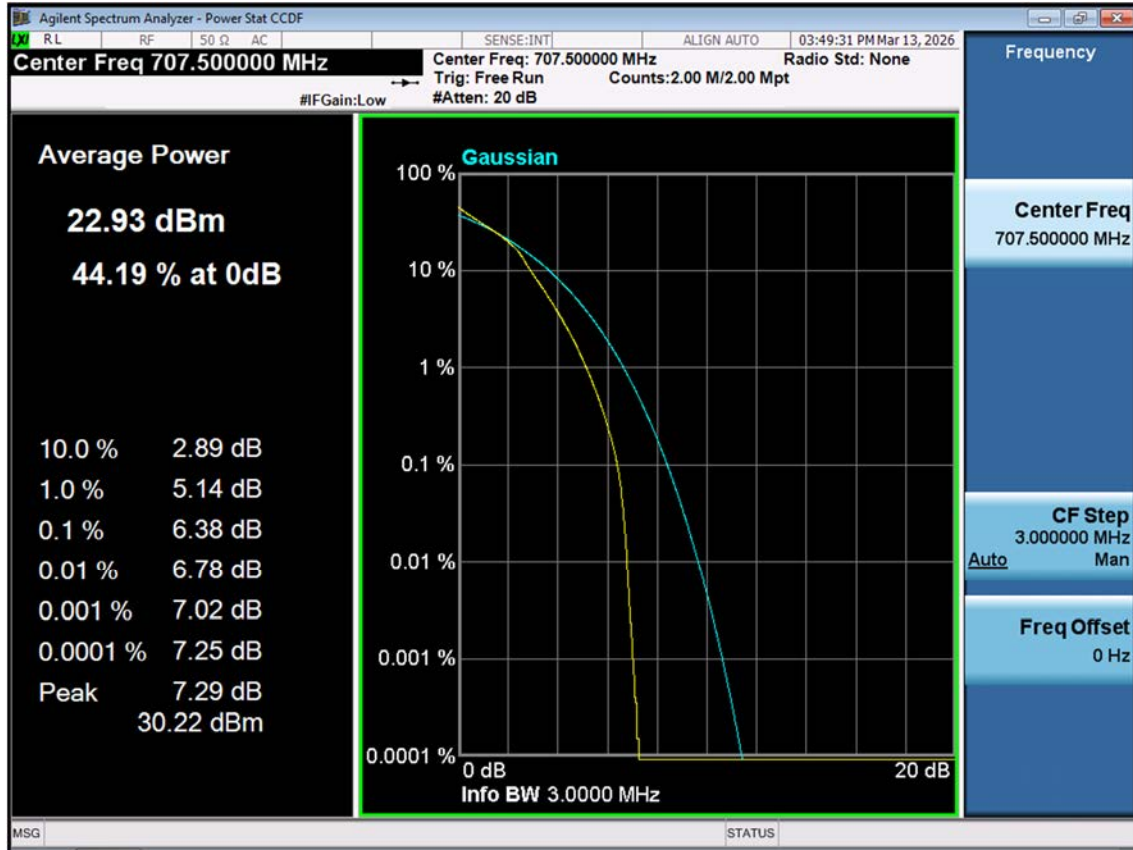


LTE B12_3 M_PAR_Mid_64QAM_FullRB

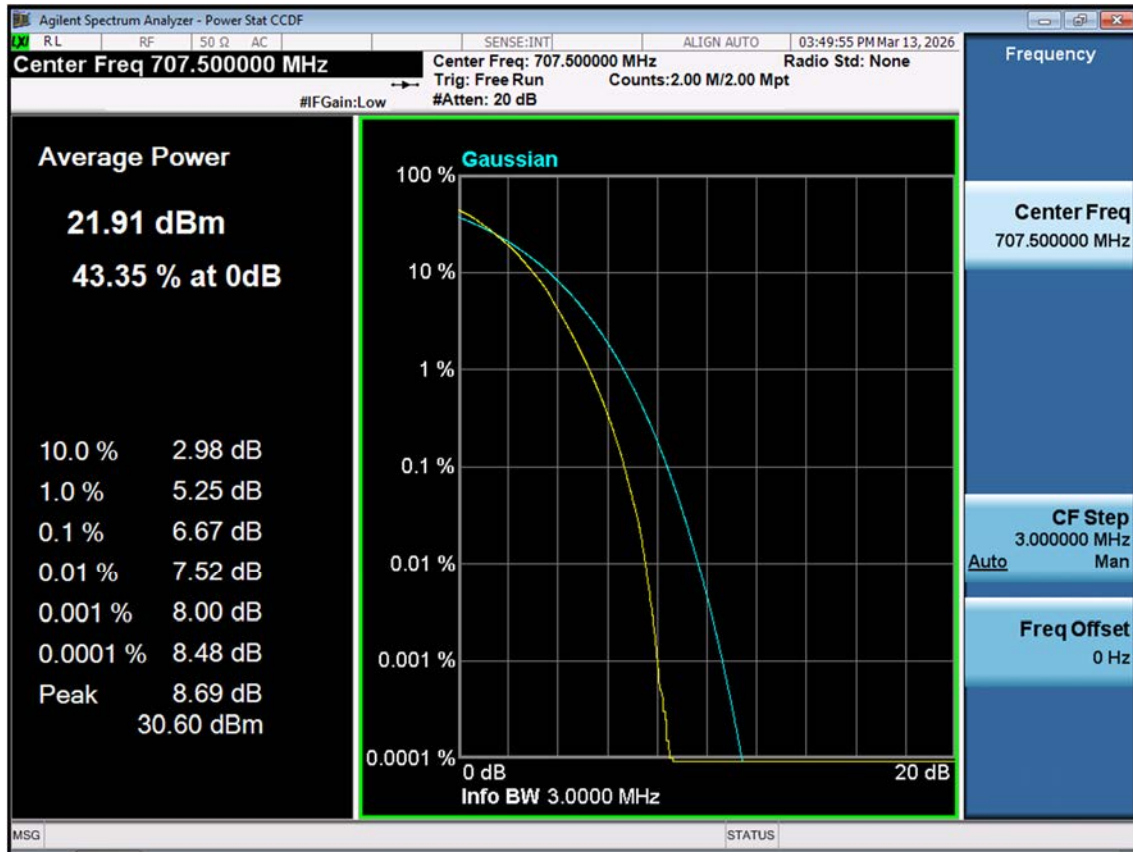


LTE B12_3 M_PAR_Mid_256QAM_FullRB

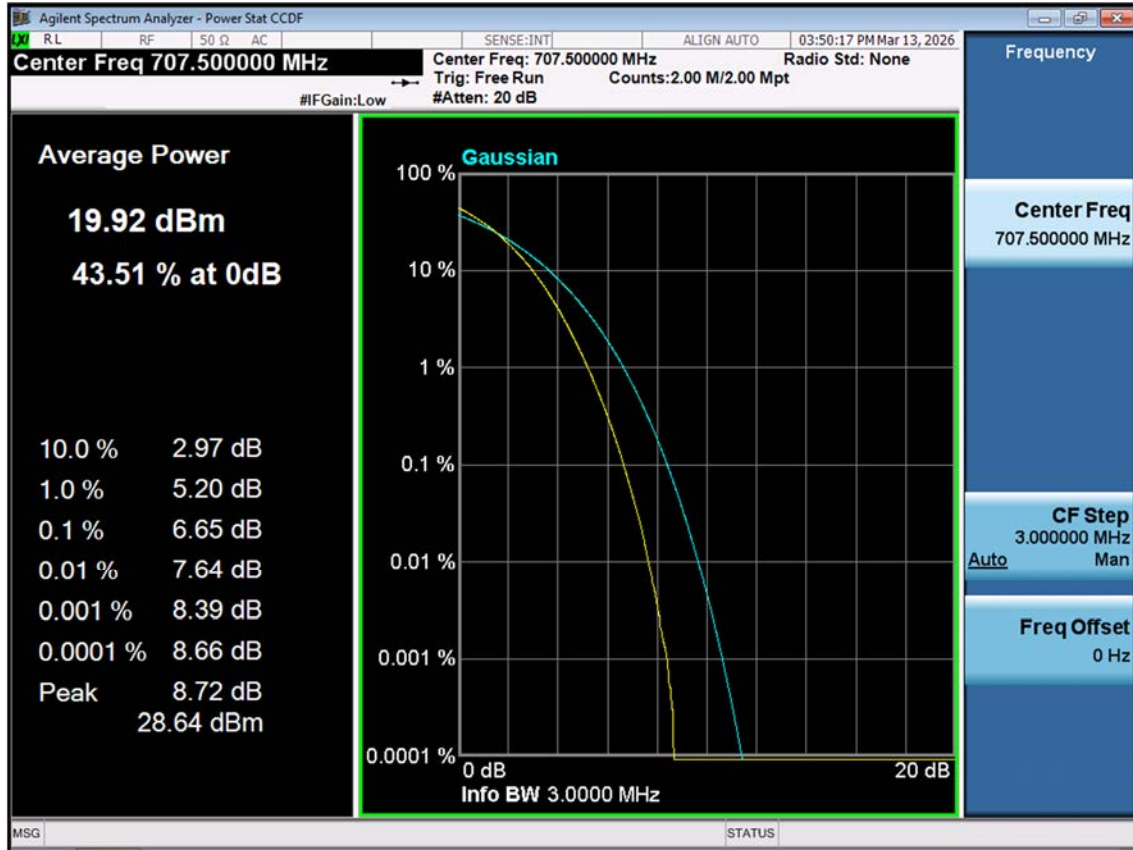


LTE B12_5 M_PAR_Mid_QPSK_FullRB

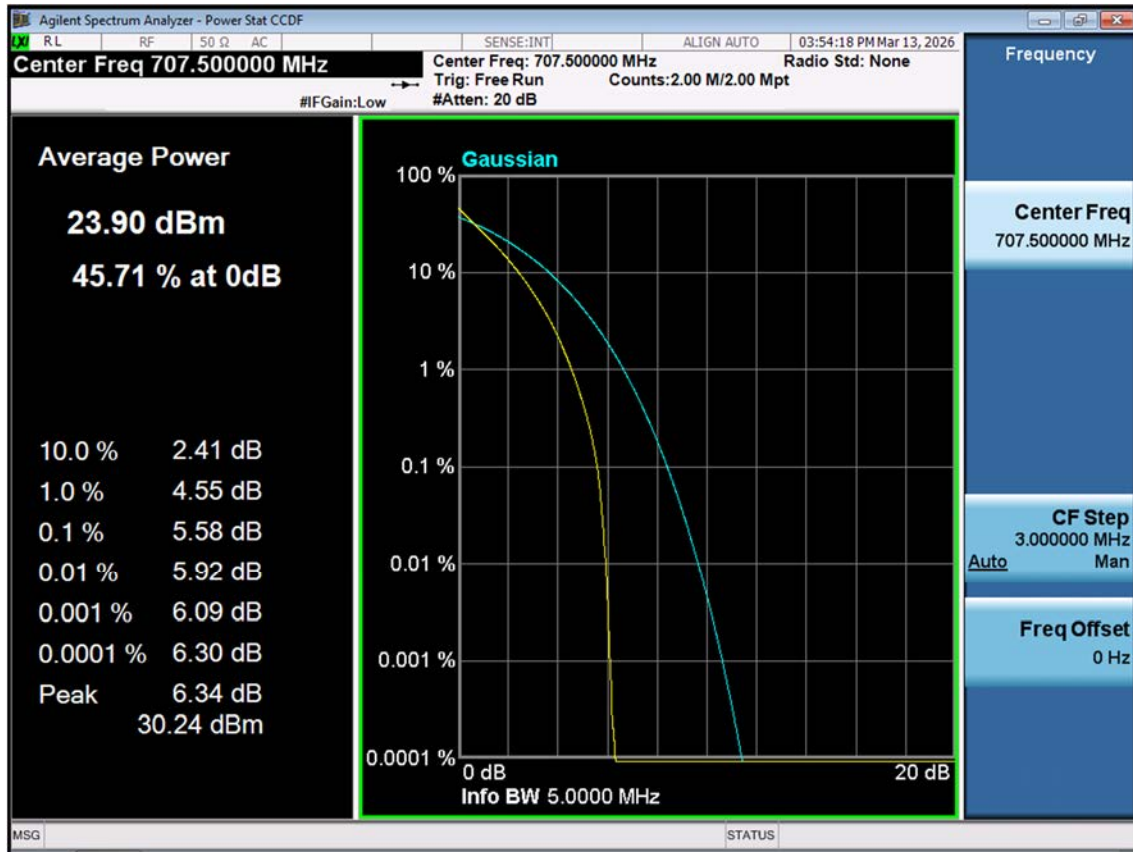


LTE B12_5 M_PAR_Mid_16QAM_FullRB

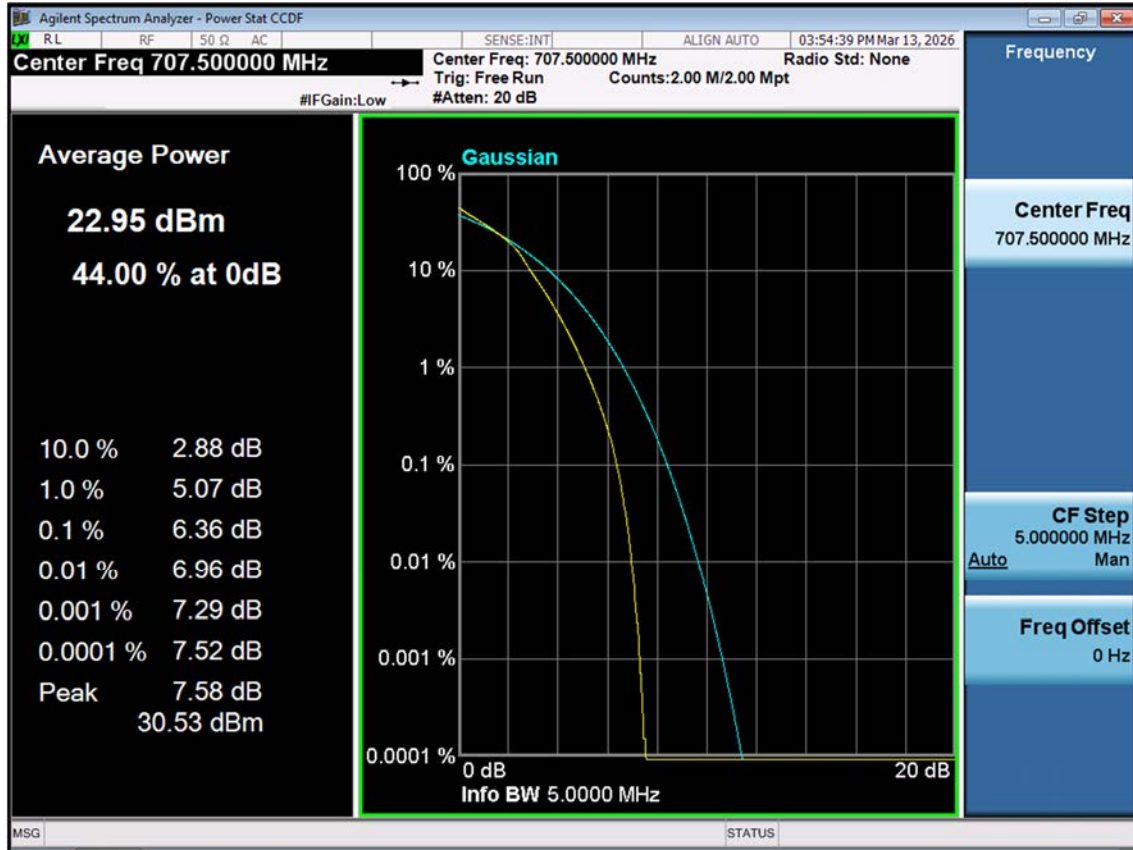


LTE B12_5 M_PAR_Mid_64QAM_FullRB

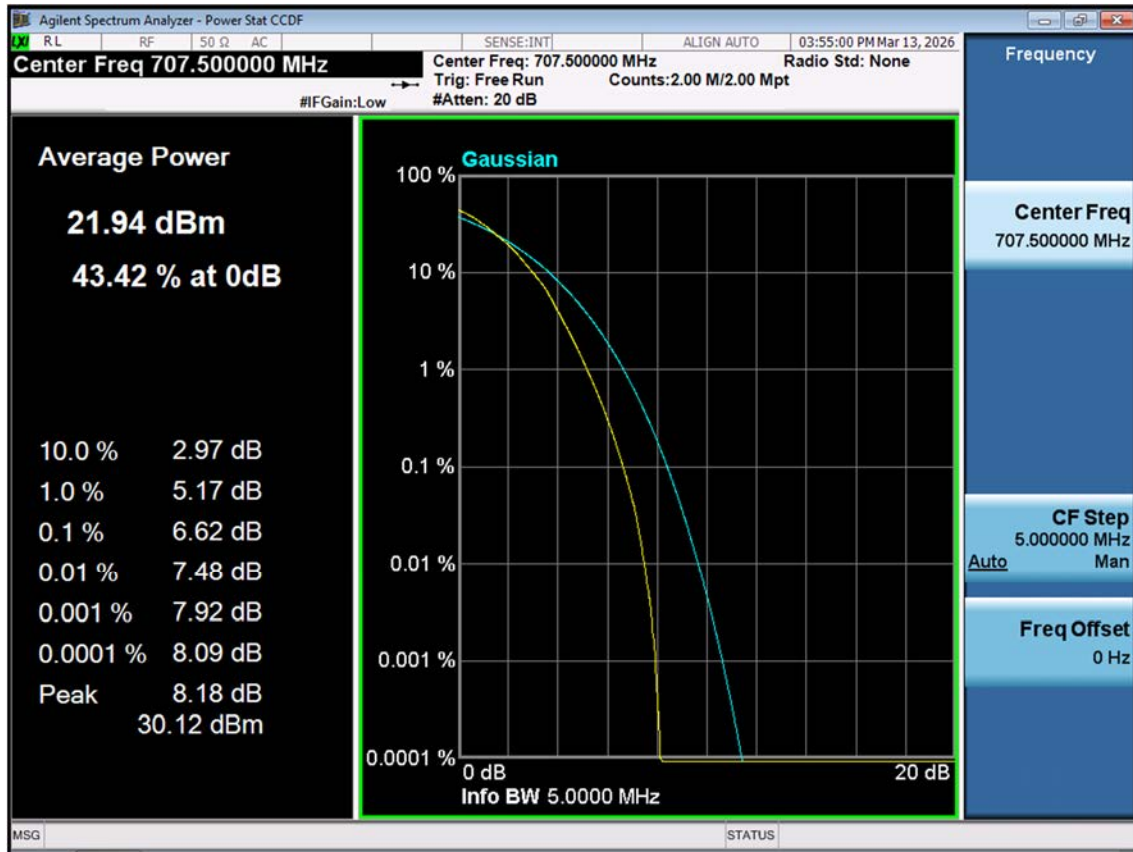


LTE B12_5 M_PAR_Mid_256QAM_FullRB

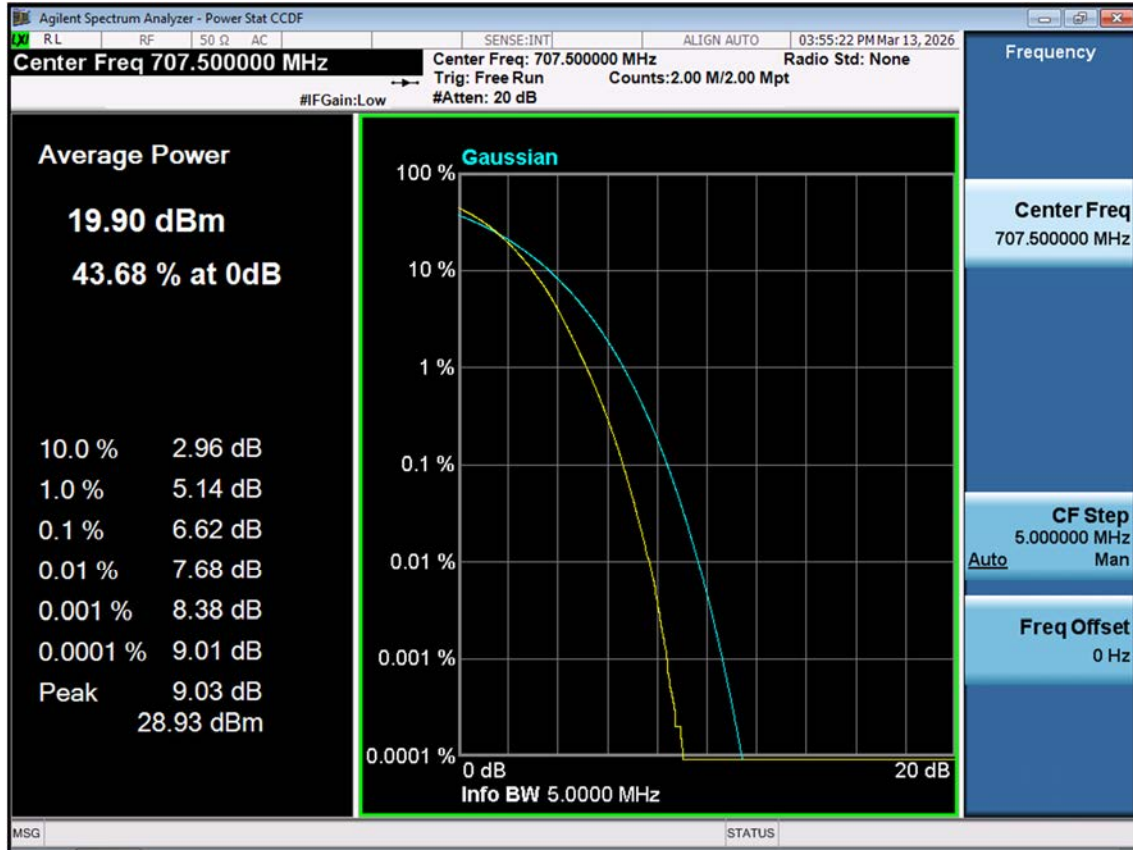


LTE B12_10 M_PAR_Mid_QPSK_FullRB

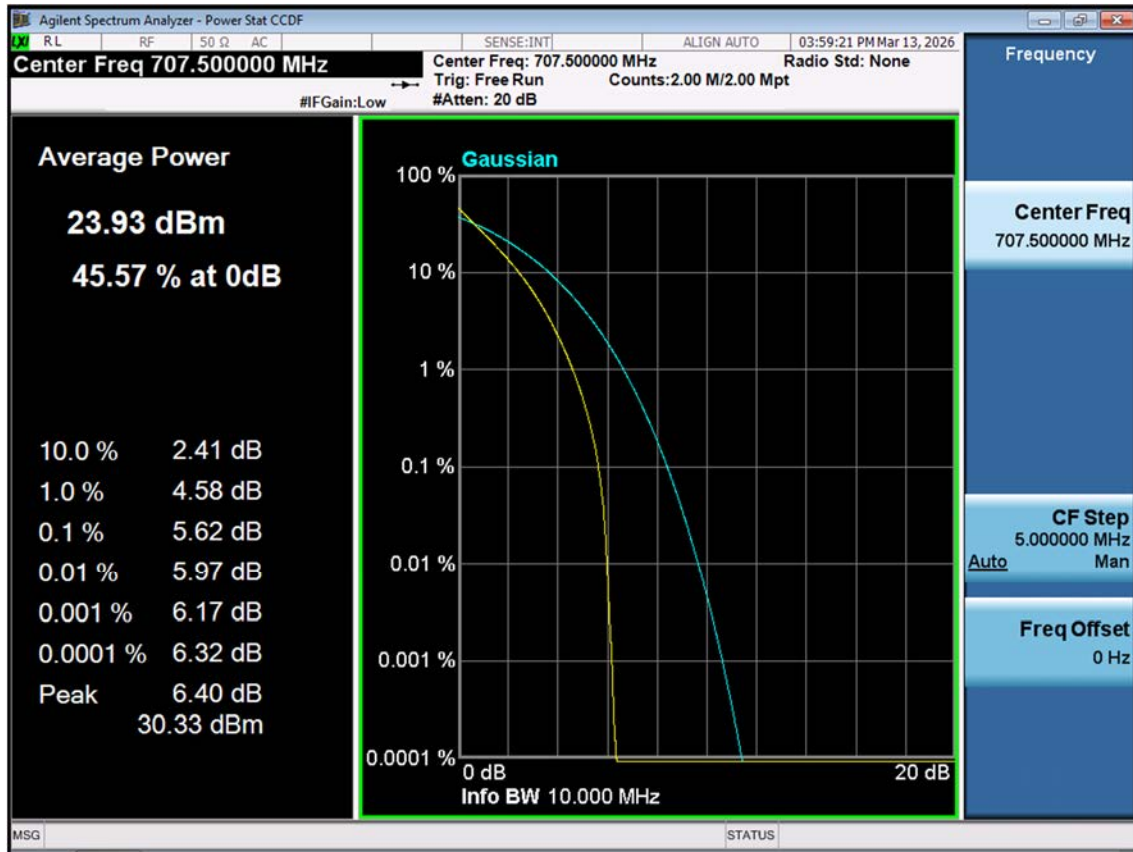


LTE B12_10 M_PAR_Mid_16QAM_FullRB

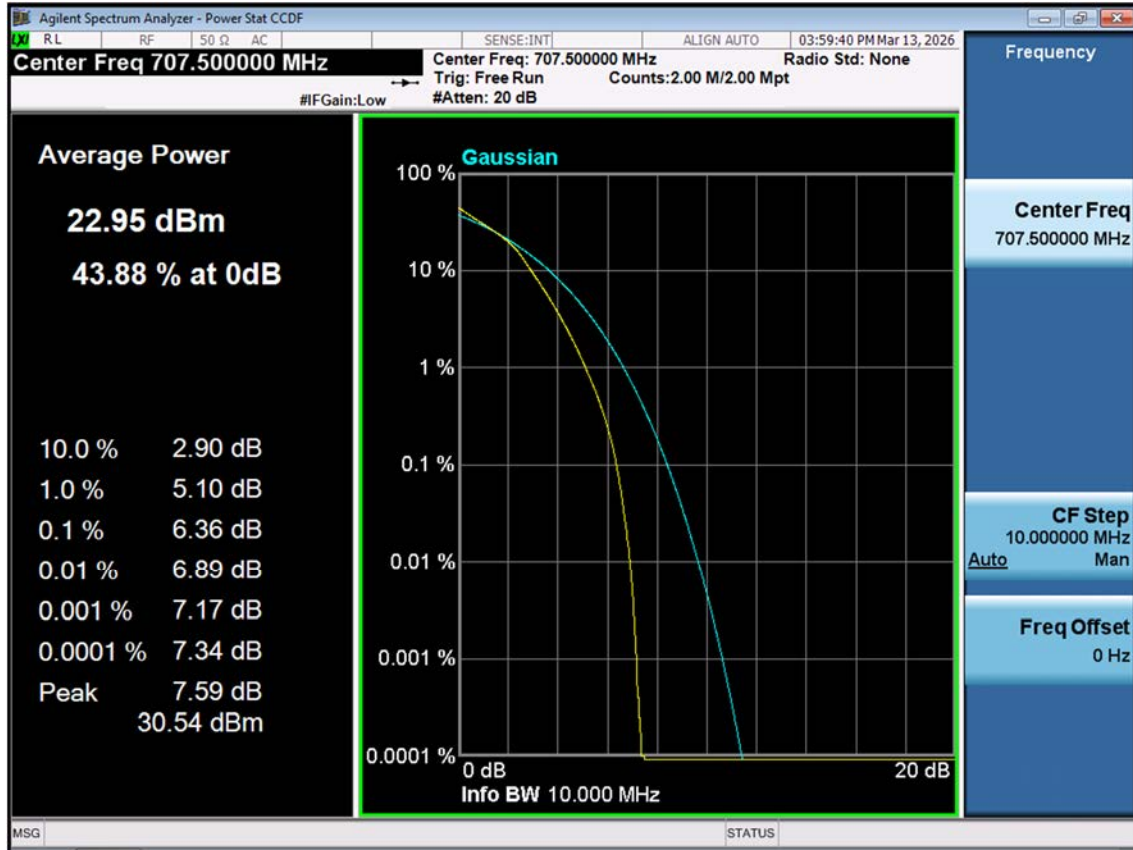

LTE B12_10 M_PAR_Mid_64QAM_FullRB

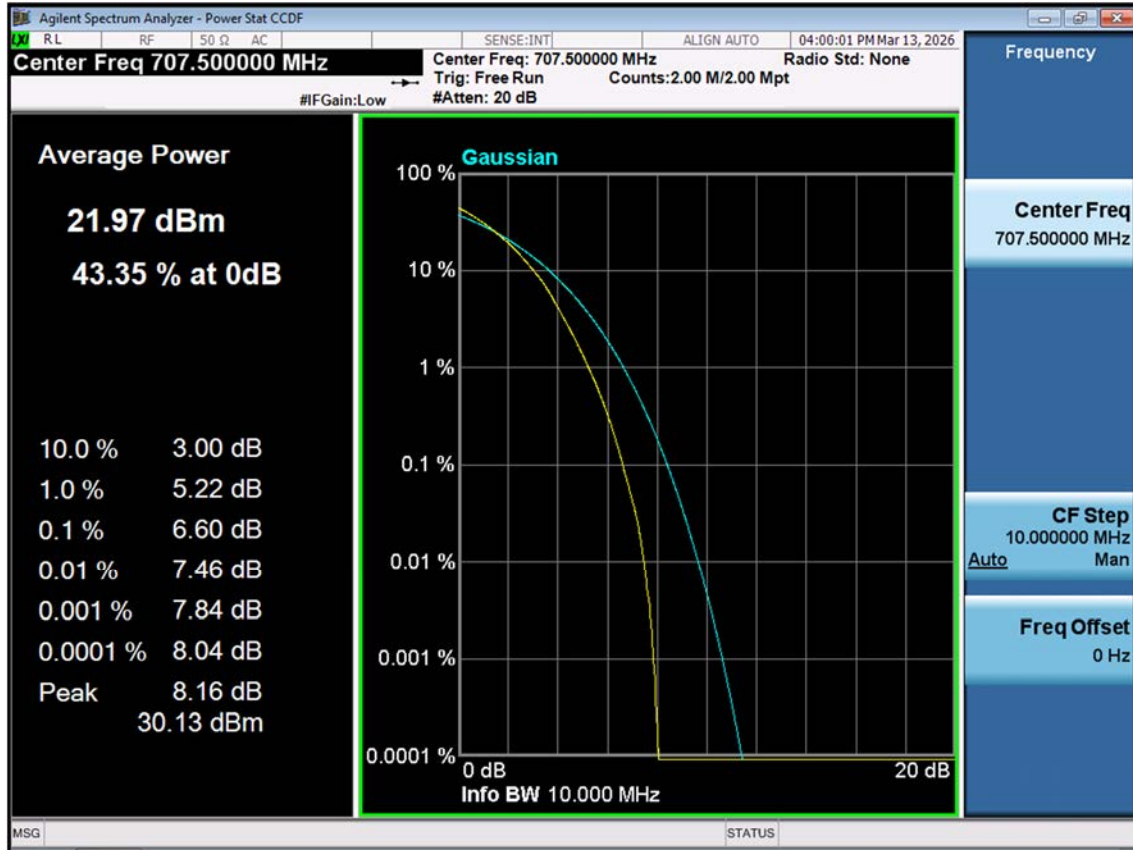


LTE B12_10 M_PAR_Mid_256QAM_FullRB

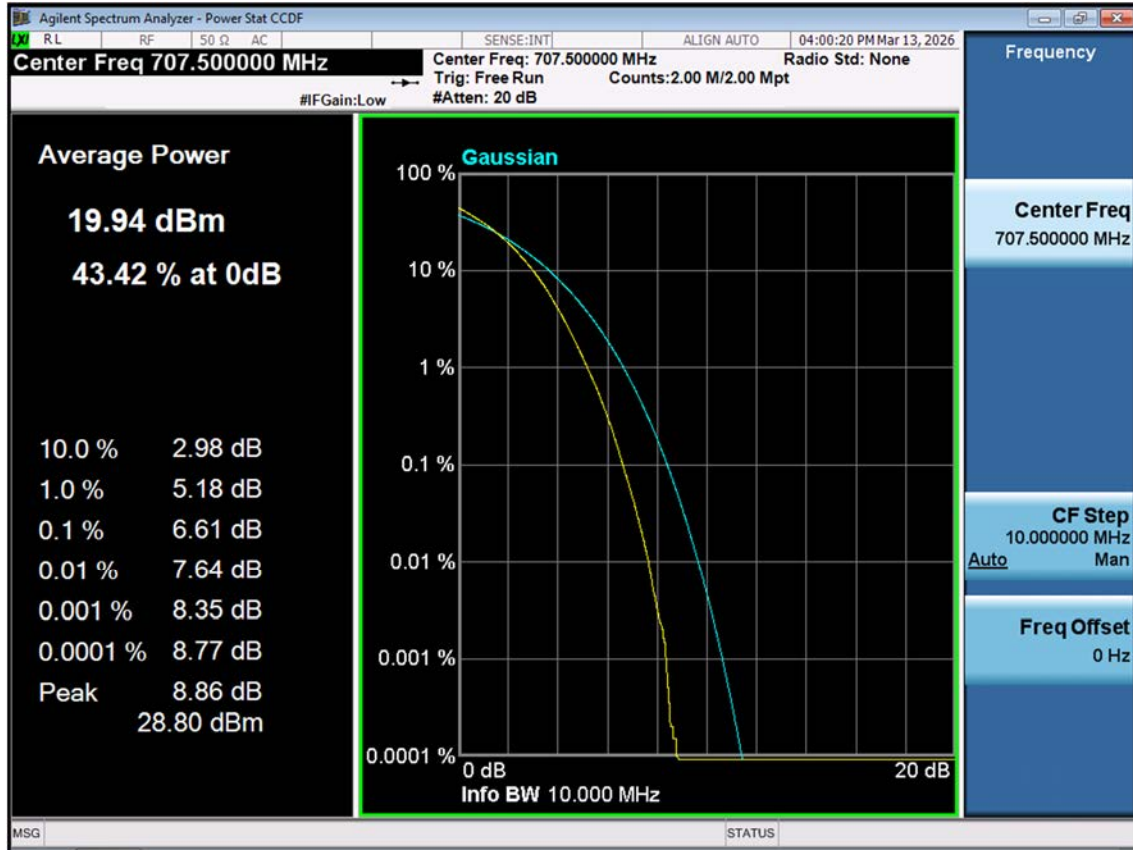


9.2 OCCUPIED BANDWIDTH


LTE B12_1.4 M_OBW_Mid_QPSK_FullRB

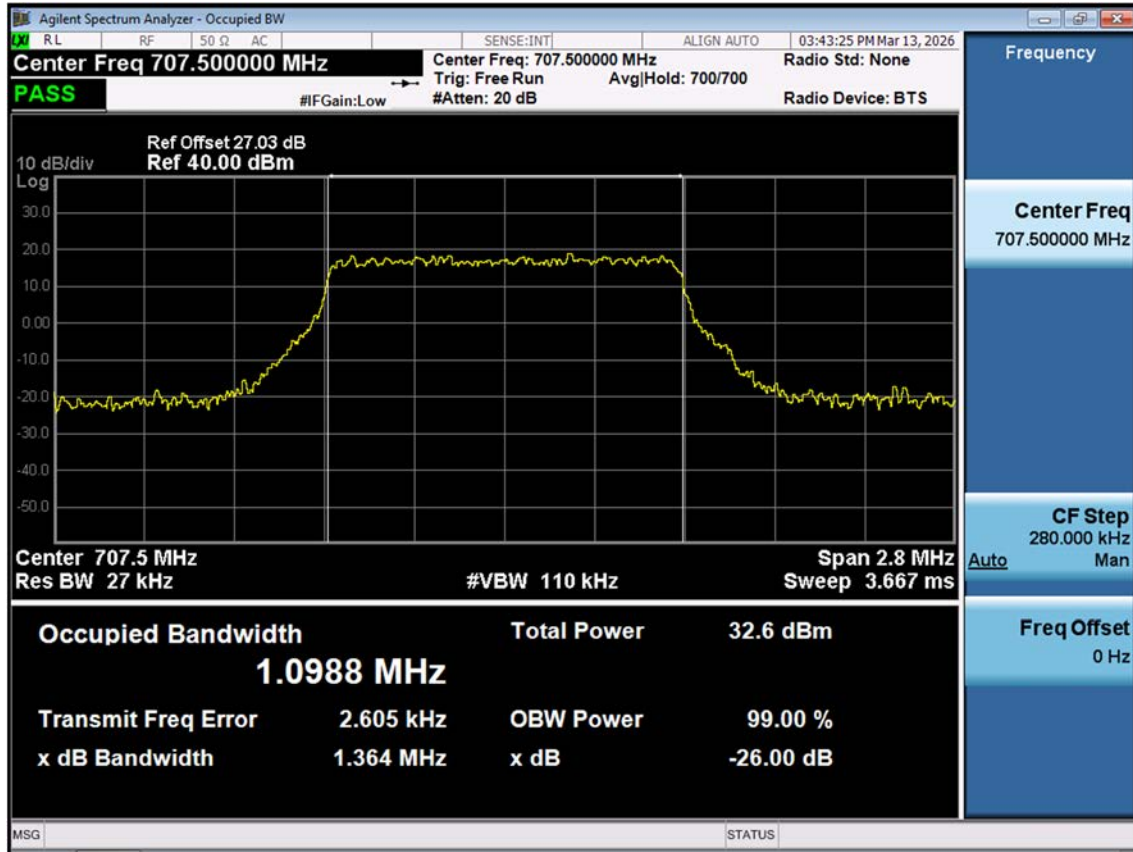


LTE B12_1.4 M_OBW_Mid_16QAM_FullRB

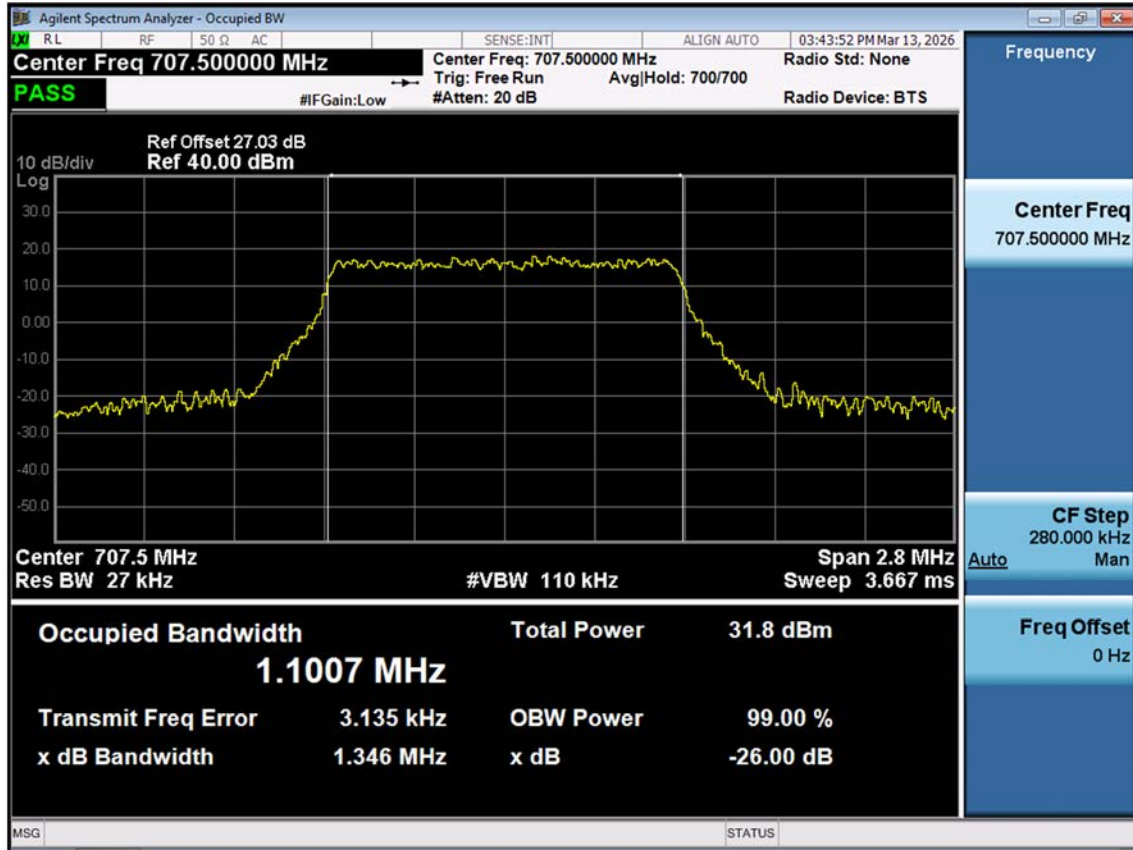


LTE B12_1.4 M_OBW_Mid_64QAM_FullRB

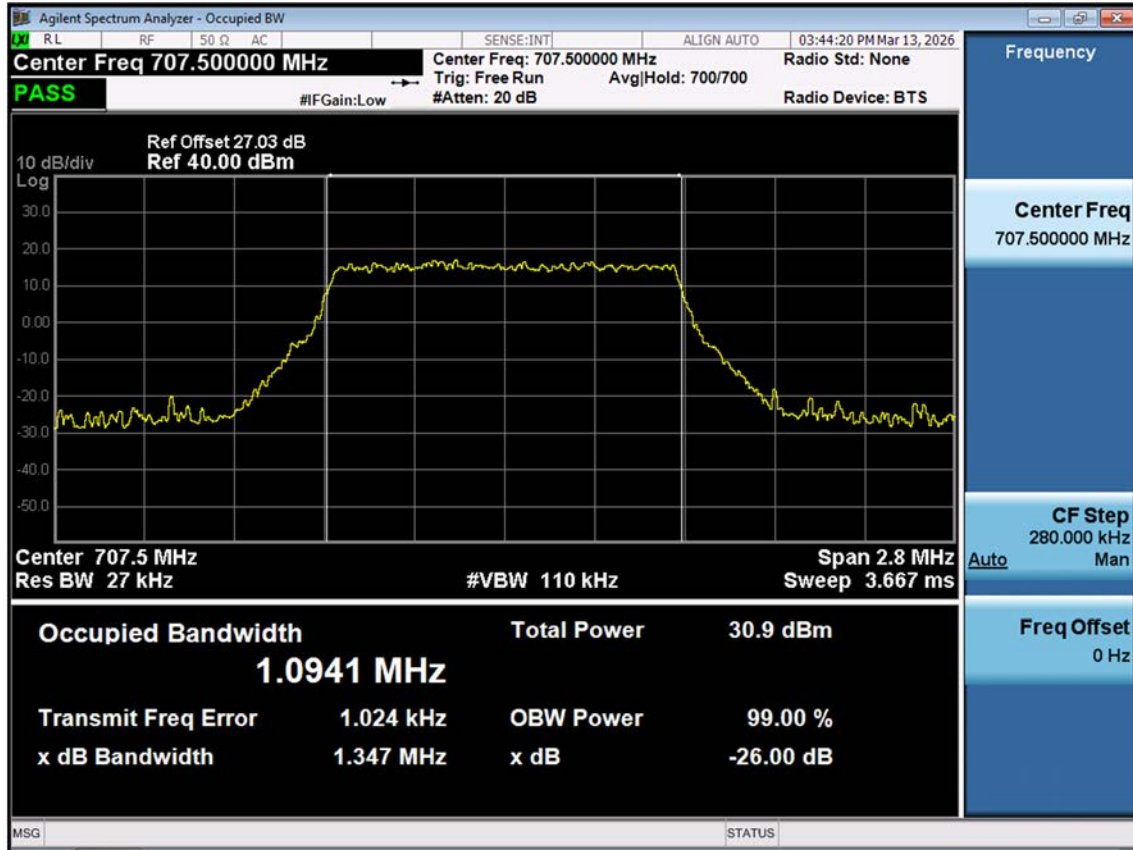


LTE B12_1.4 M_OBW_Mid_256QAM_FullRB

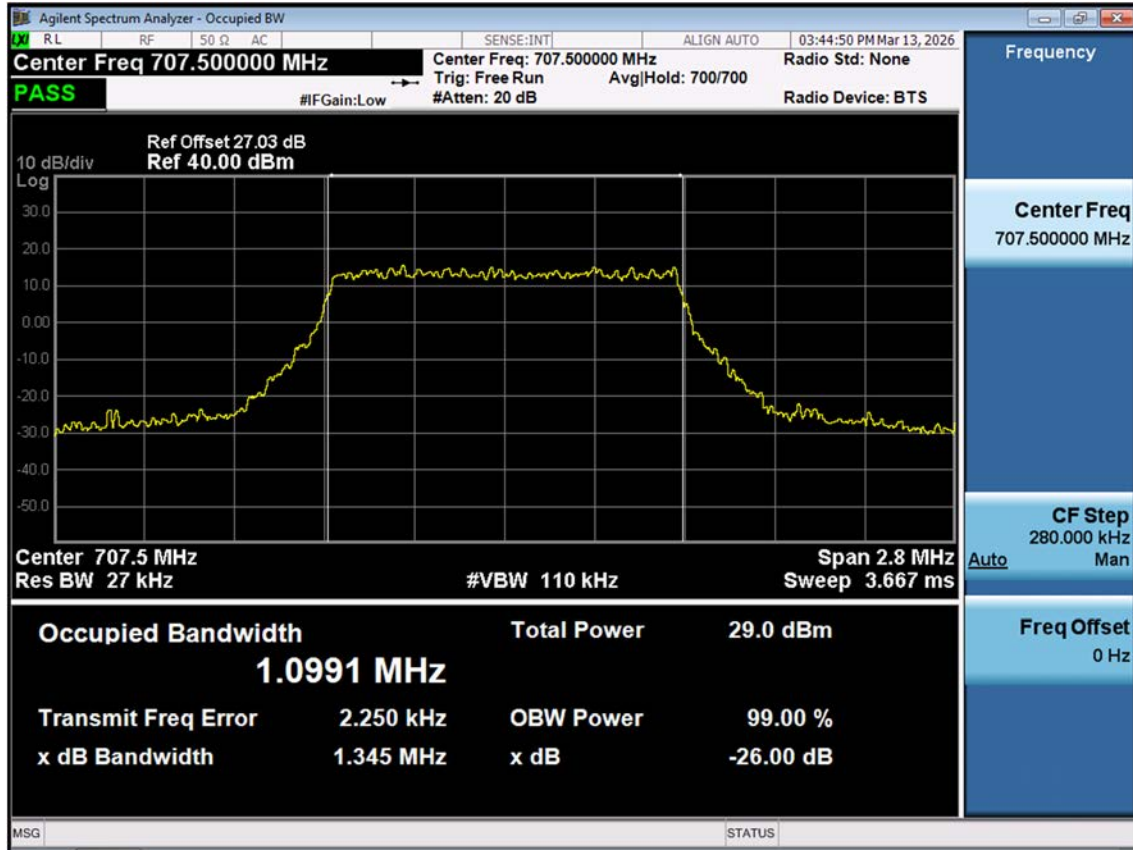


LTE B12_3 M_OBW_Mid_QPSK_FullRB

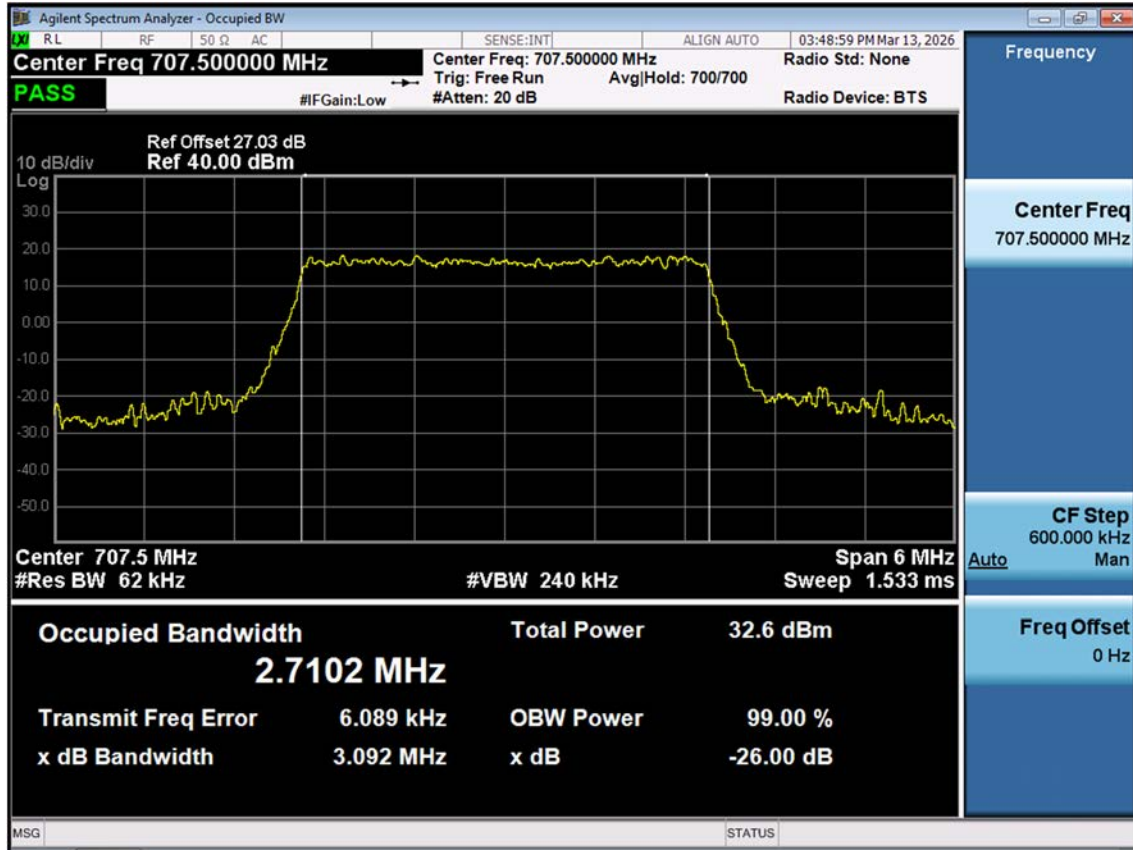


LTE B12_3 M_OBW_Mid_16QAM_FullRB

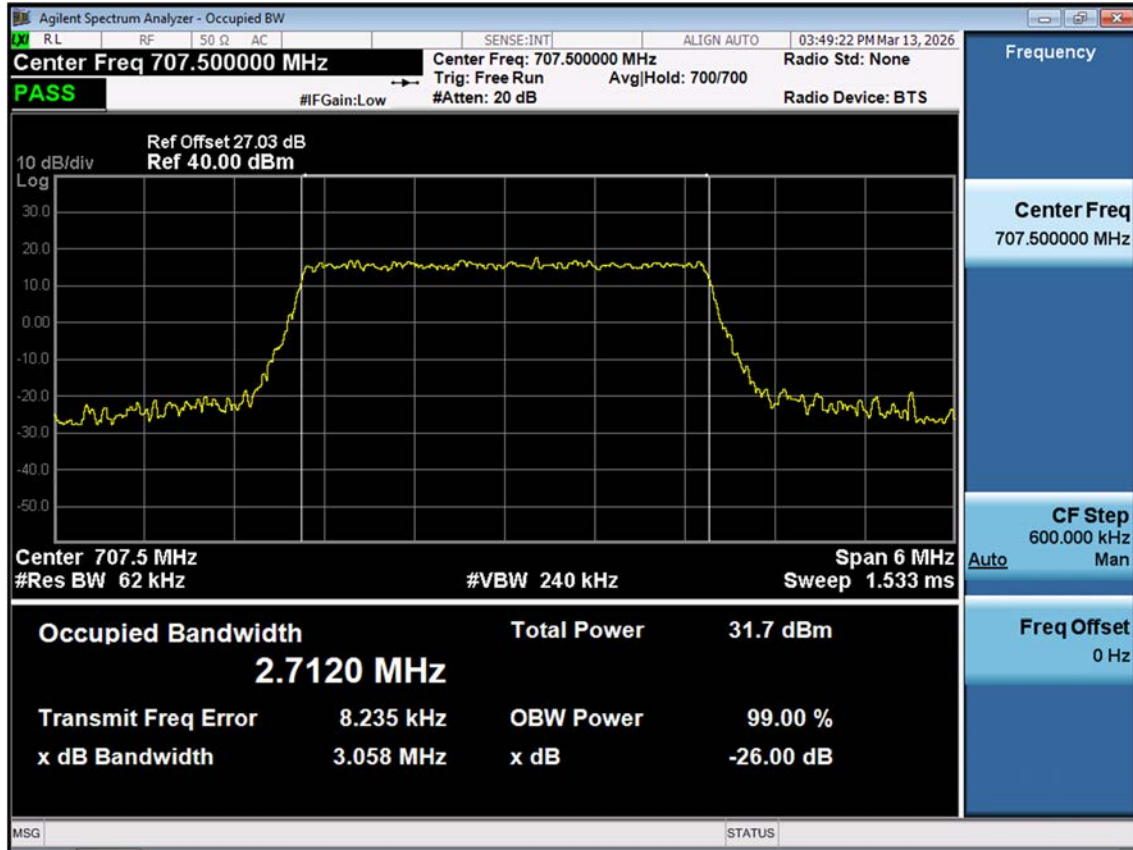


LTE B12_3 M_OBW_Mid_64QAM_FullRB

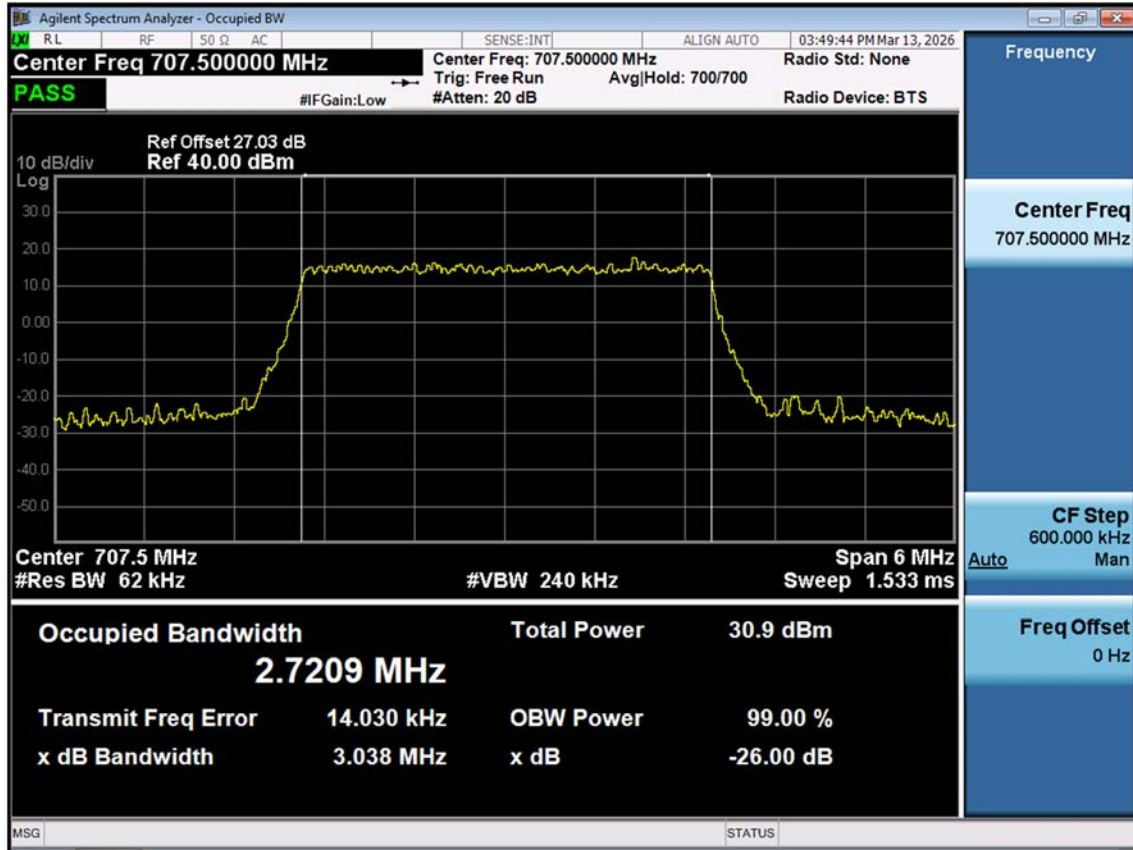


LTE B12_3 M_OBW_Mid_256QAM_FullRB

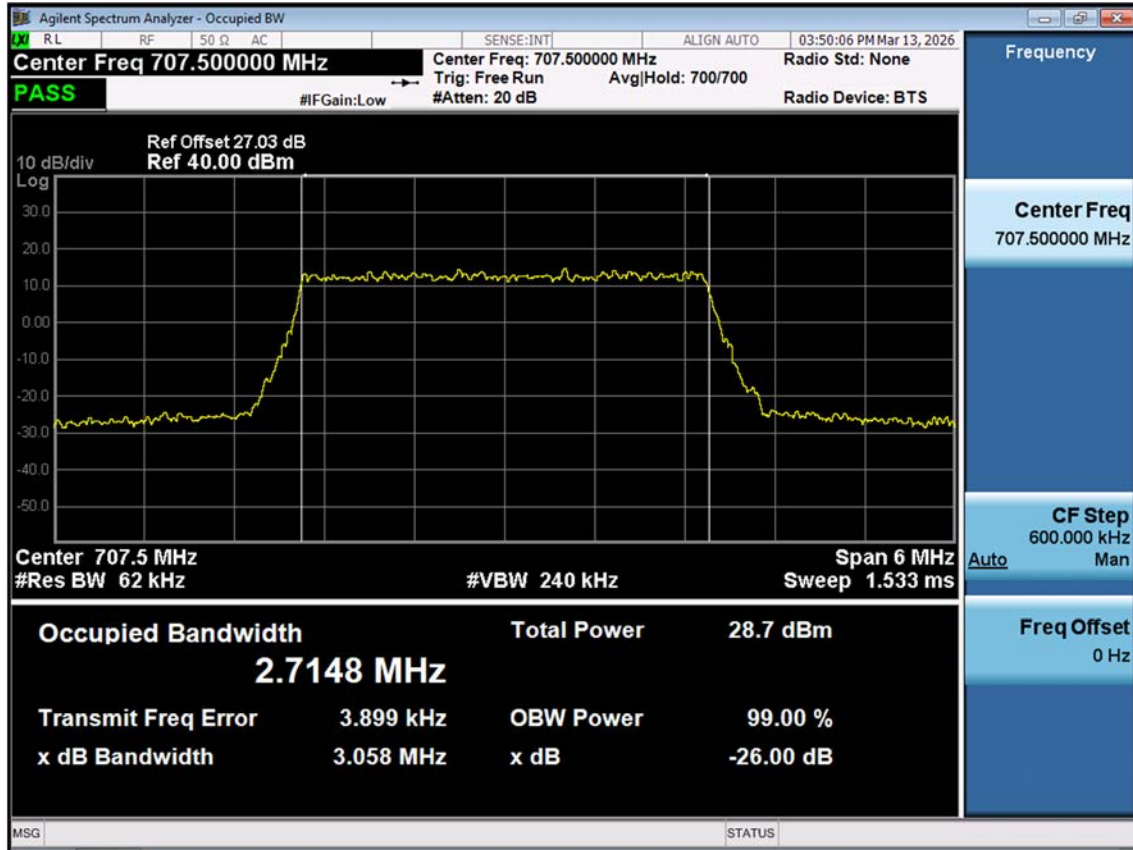


LTE B12_5 M_OBW_Mid_QPSK_FullRB

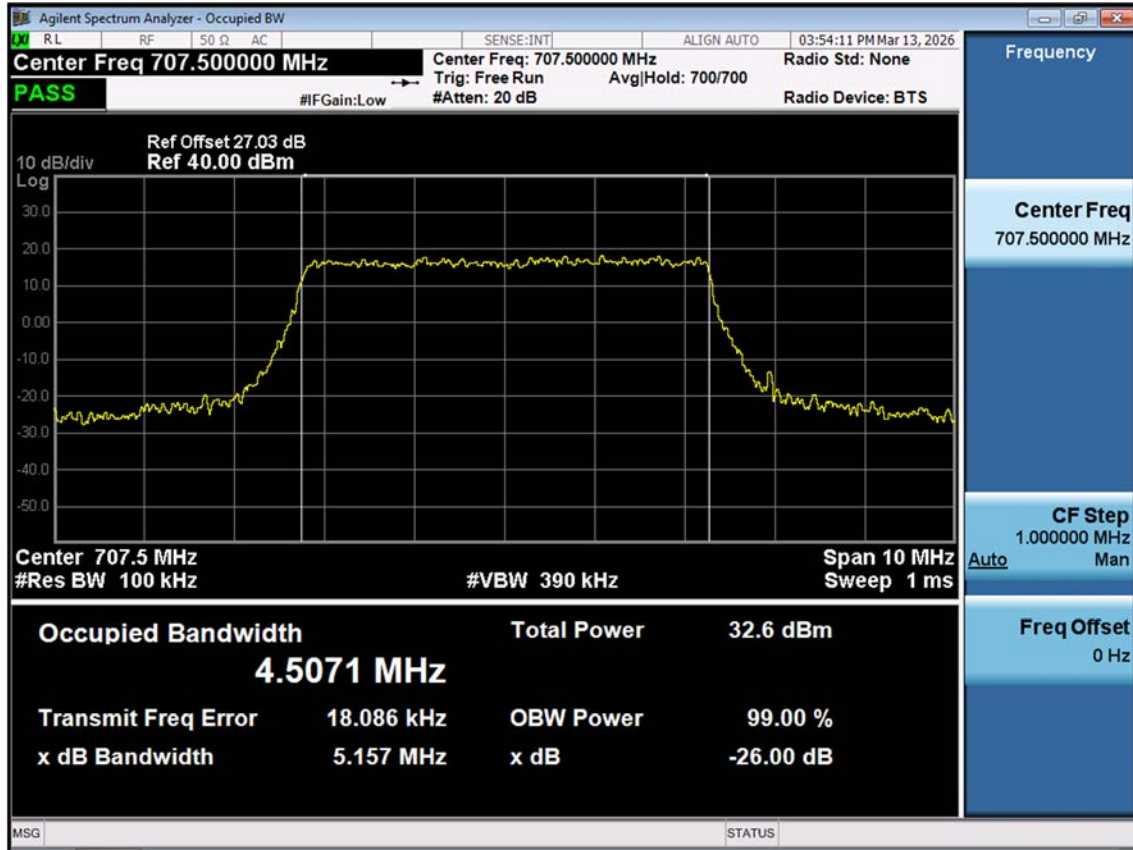


LTE B12_5 M_OBW_Mid_16QAM_FullRB

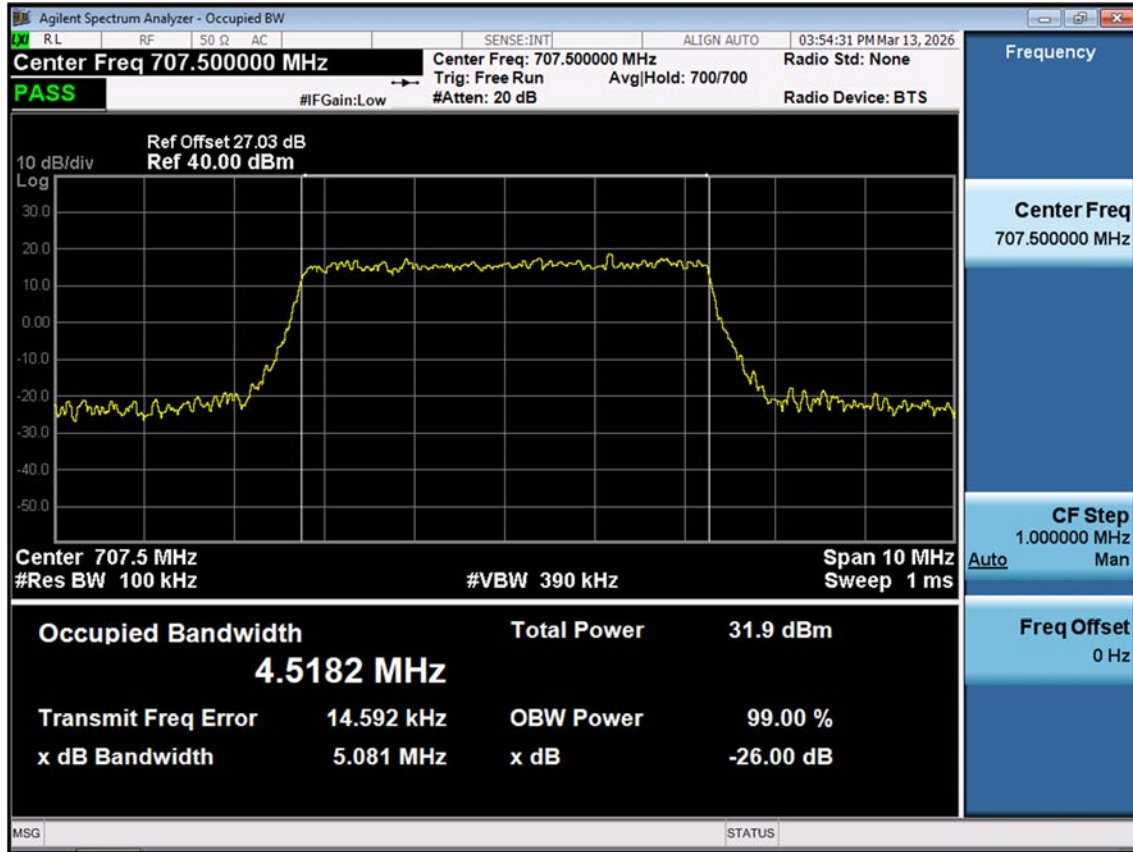


LTE B12_5 M_OBW_Mid_64QAM_FullRB

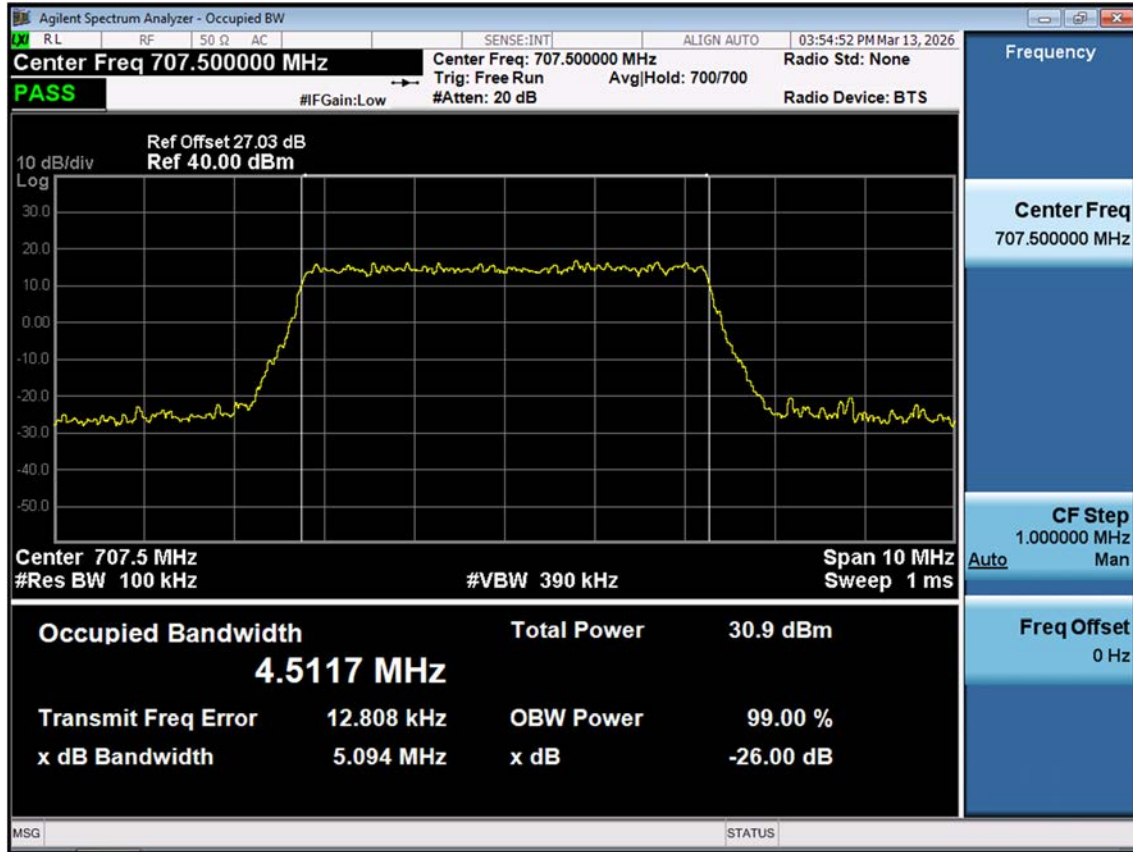

LTE B12_5 M_OBW_Mid_256QAM_FullRB

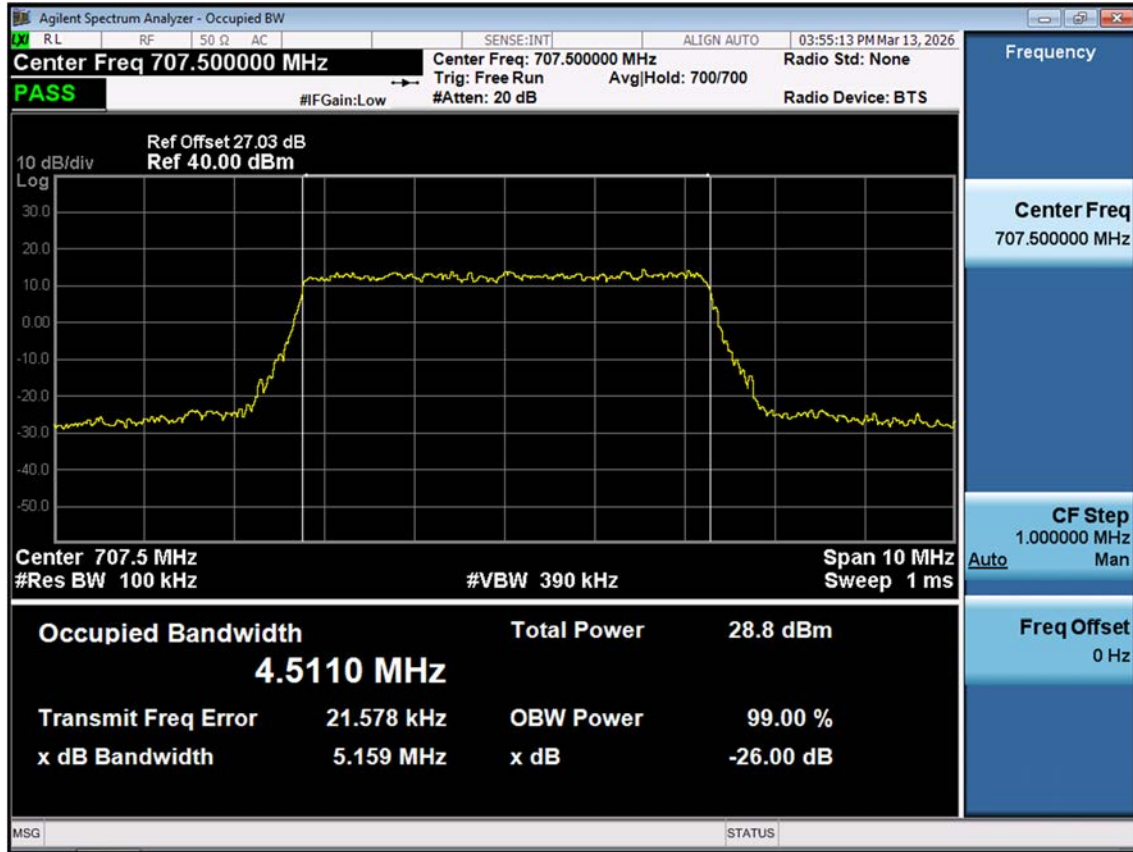

LTE B12_10 M_OBW_Mid_QPSK_FullRB

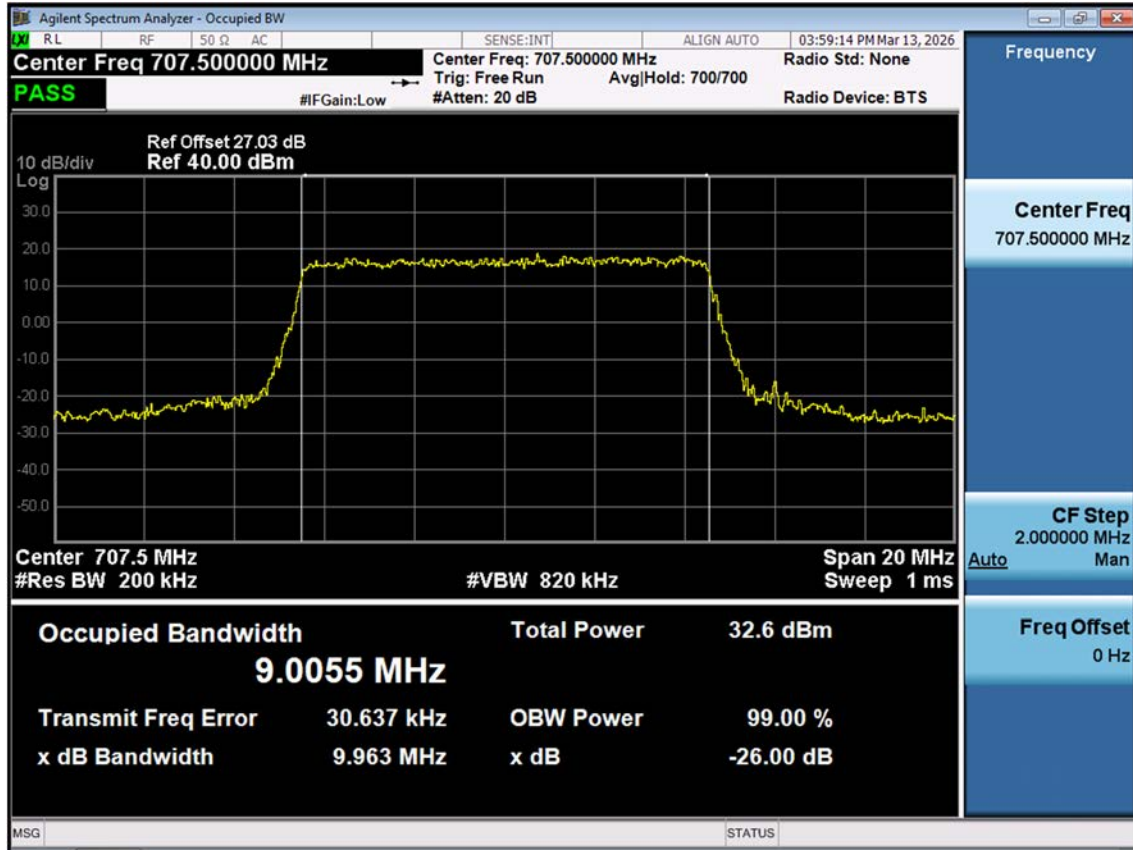

Agilent Spectrum Analyzer - Occupied BW

RL 50 Ω AC SENSE:INT ALIGN AUTO 03:59:34 PM Mar 13, 2026

Center Freq 707.500000 MHz **Center Freq: 707.500000 MHz** **Radio Std: None**
#FGain: Low Trig: Free Run Avg/Hold: 700/700
PASS #Atten: 20 dB **Radio Device: BTS**

Ref Offset 27.03 dB
Ref 40.00 dBm

10 dB/div
Log

Center 707.5 MHz **Span 20 MHz**
#Res BW 200 kHz **#VBW 820 kHz** **Sweep 1 ms**

Occupied Bandwidth		Total Power	
8.9979 MHz		31.7 dBm	
Transmit Freq Error	34.901 kHz	OBW Power	99.00 %
x dB Bandwidth	9.876 MHz	x dB	-26.00 dB

MSG STATUS


Frequency

Center Freq
707.500000 MHz


CF Step
2.000000 MHz
Man

Freq Offset
0 Hz

LTE B12_10 M_OBW_Mid_64QAM_FullRB

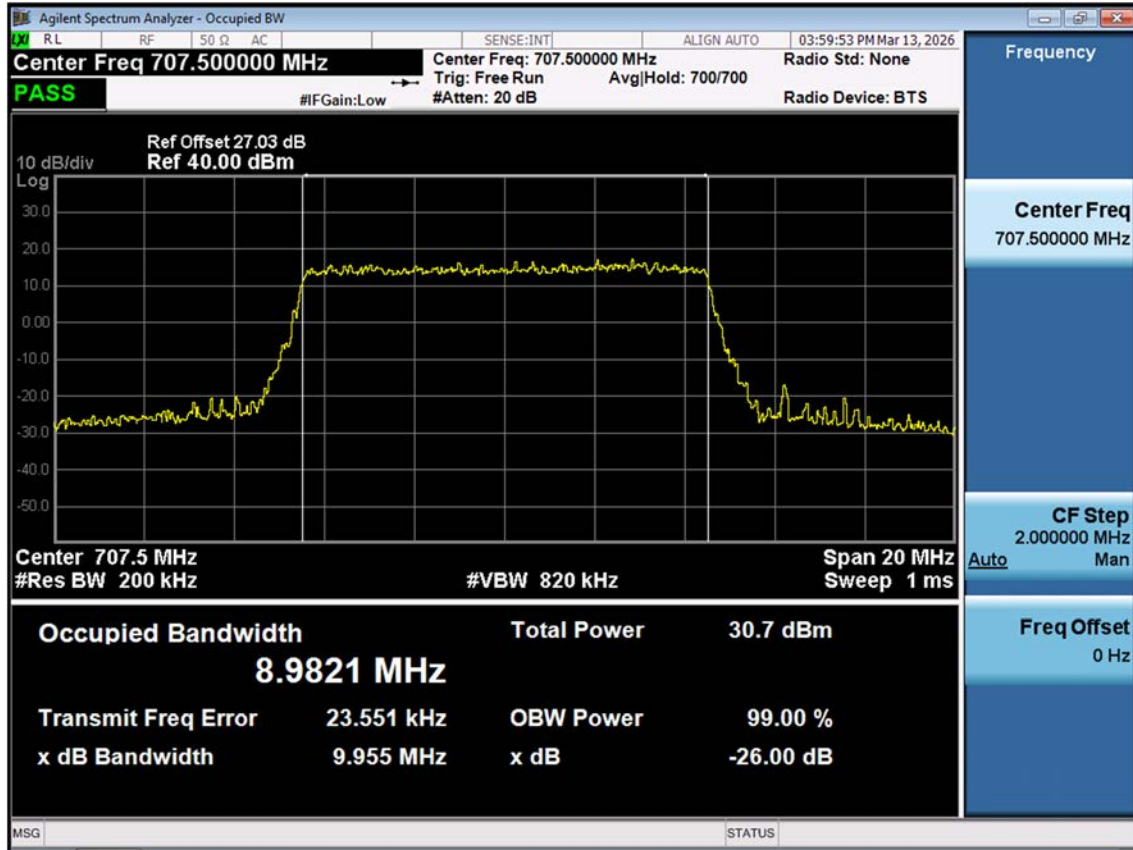


LTE B12_10 M_OBW_Mid_256QAM_FullRB

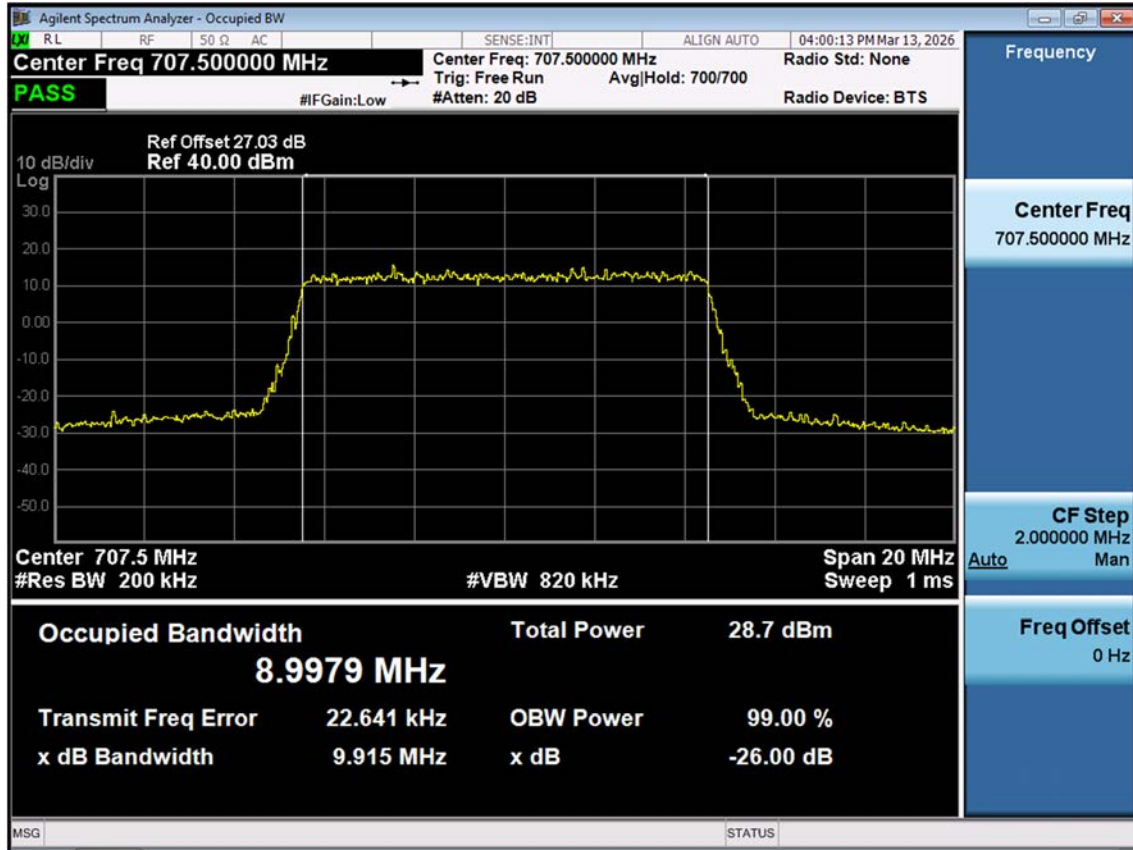


9.3 CONDUCTED SPURIOUS EMISSIONS


LTE B12_1.4 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

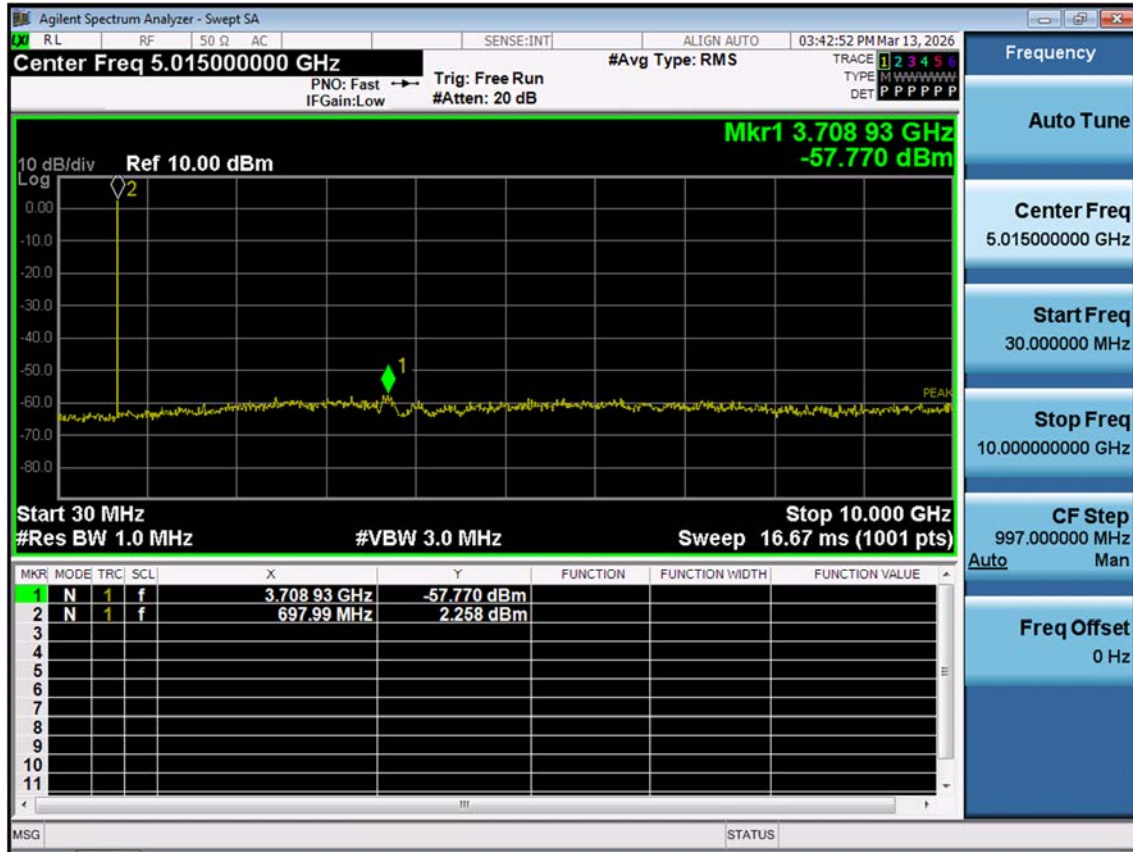


LTE B12_1.4 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

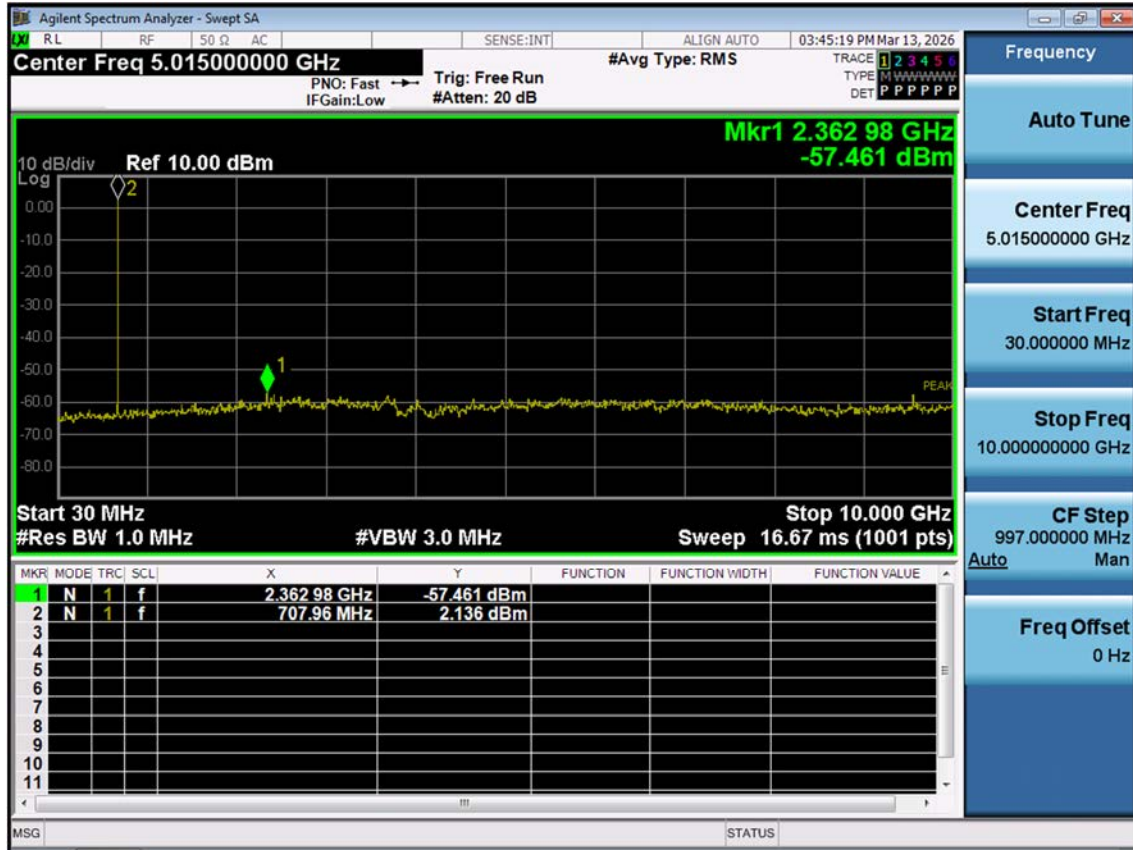


LTE B12_1.4 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

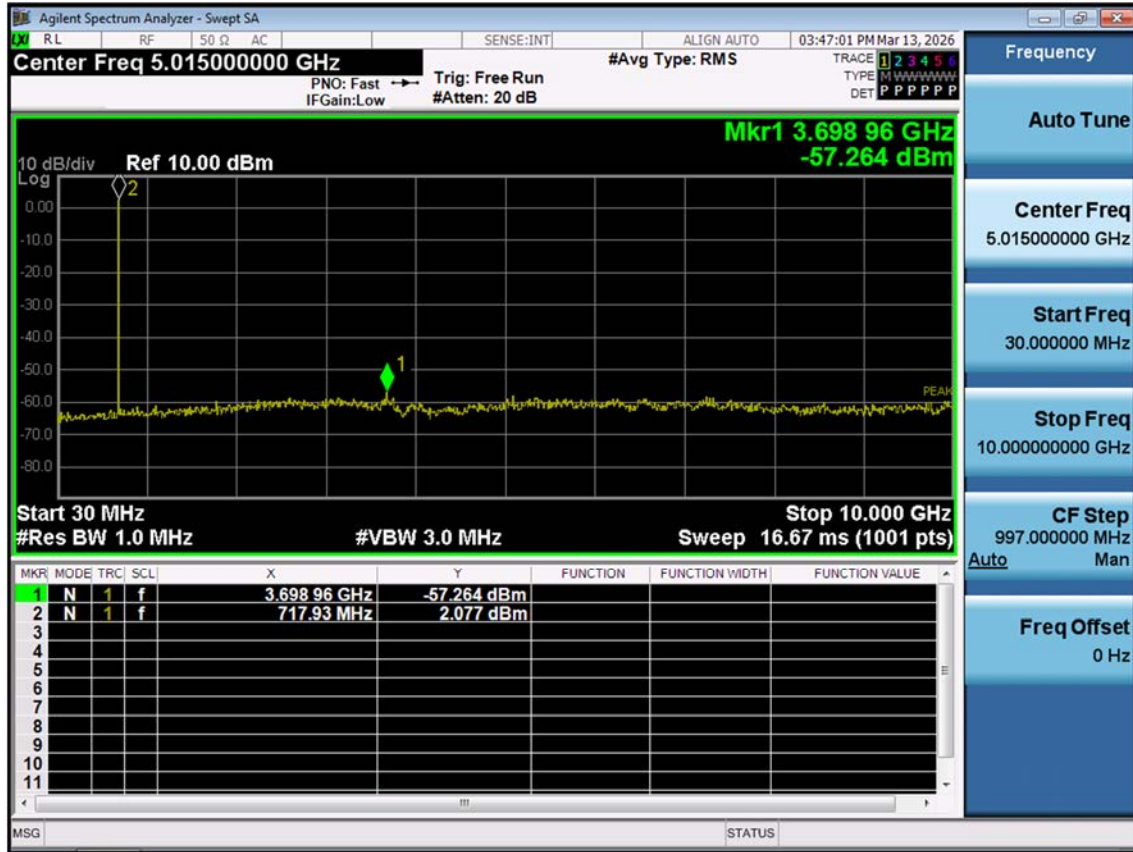


LTE B12_3 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

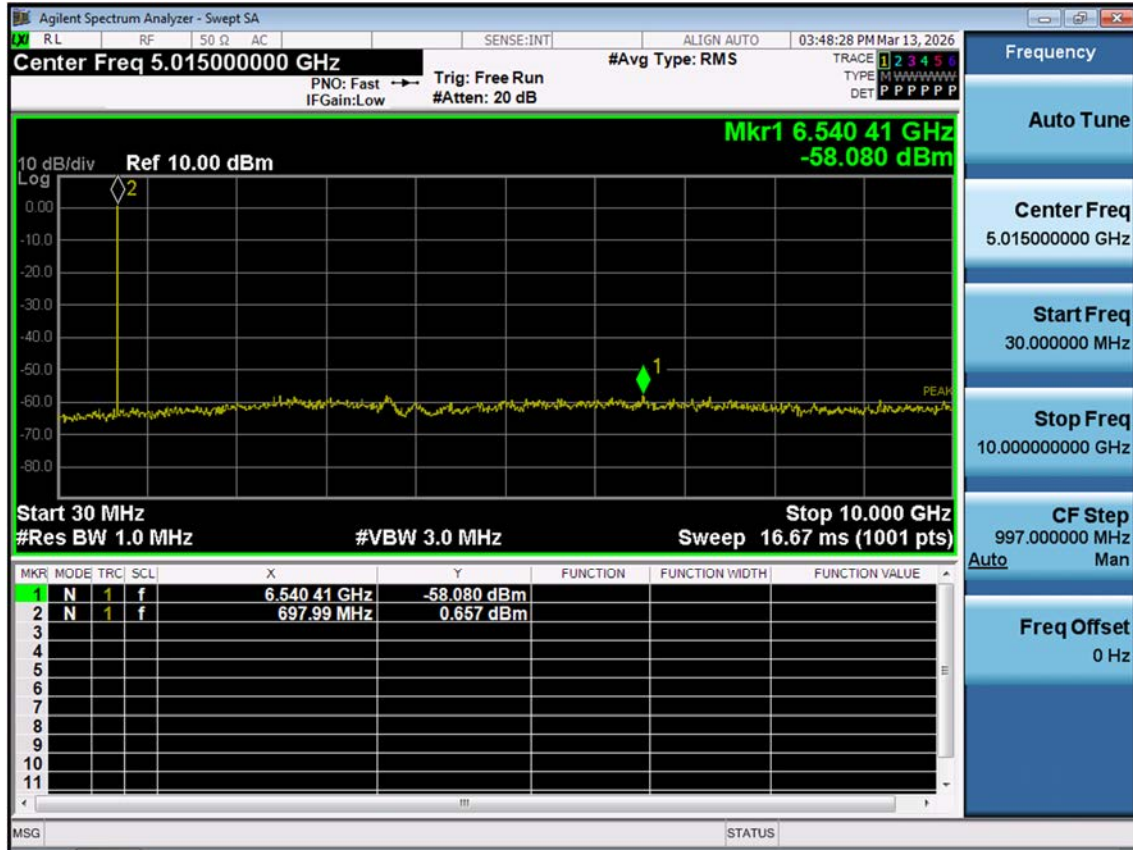


LTE B12_3 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

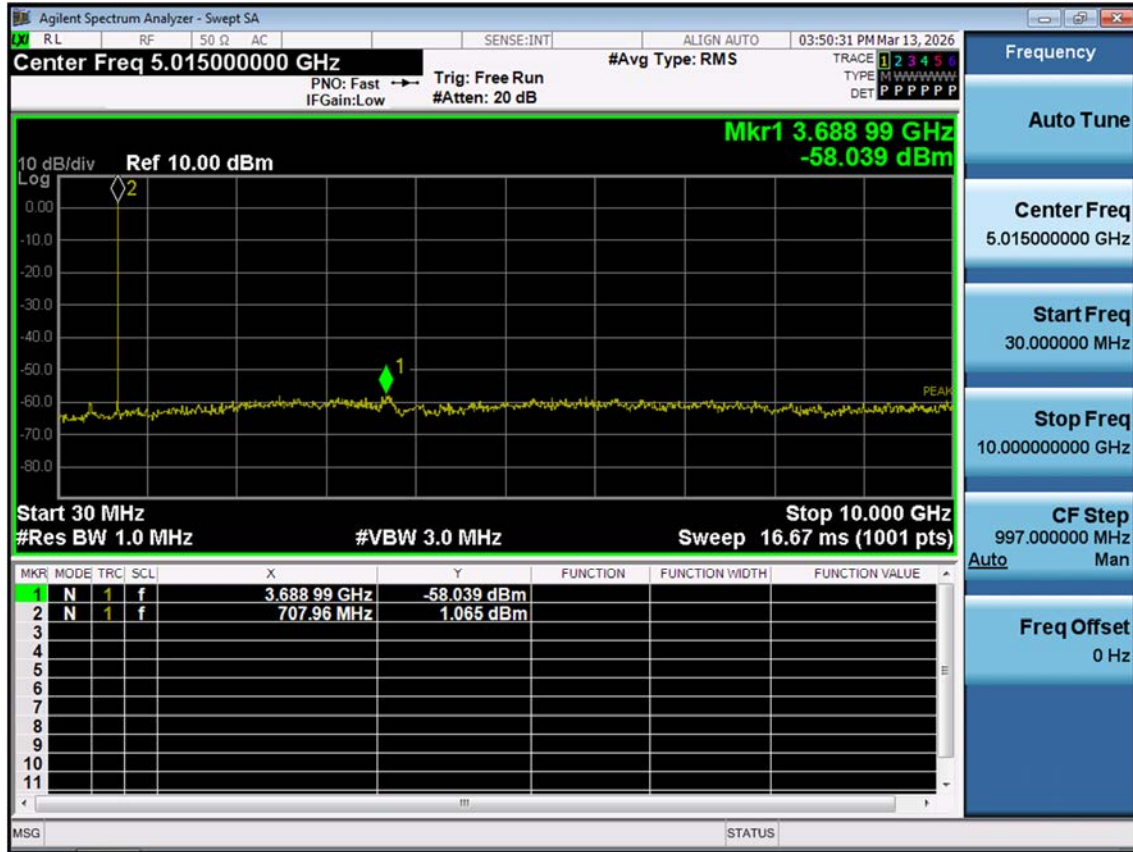


LTE B12_3 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

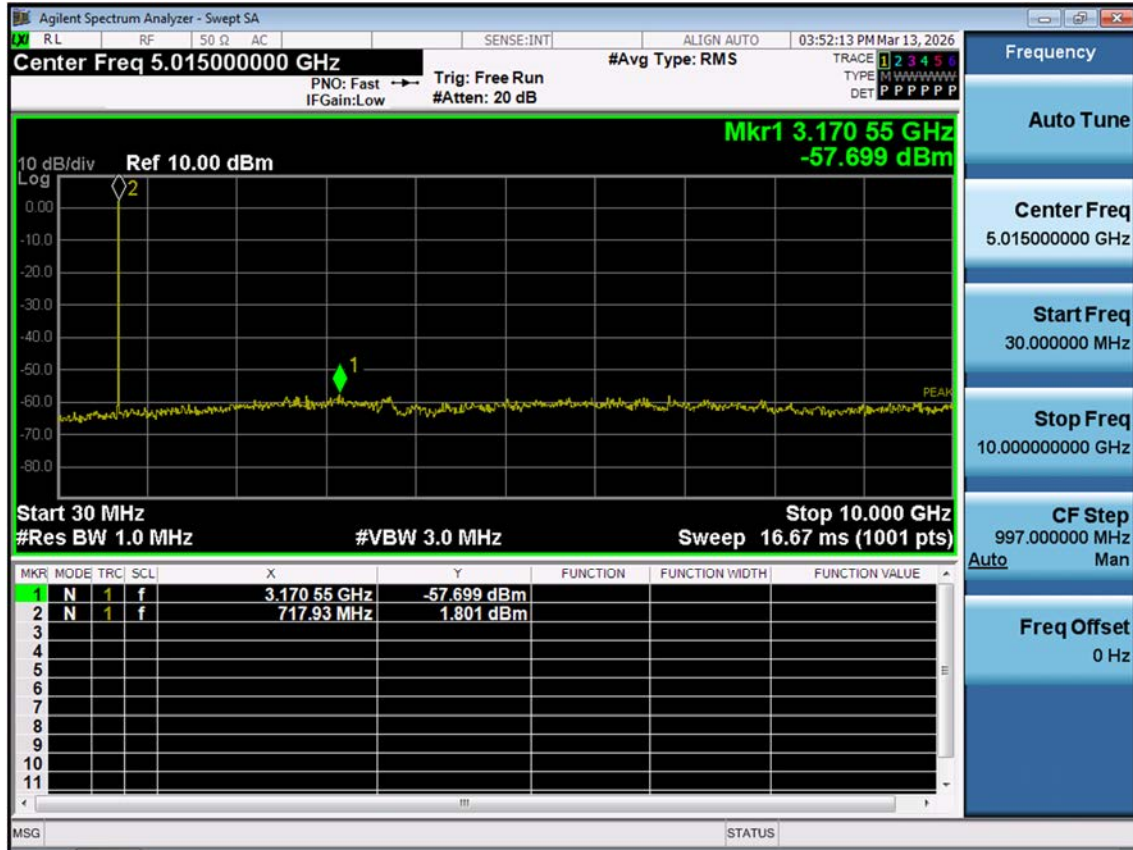


LTE B12_5 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

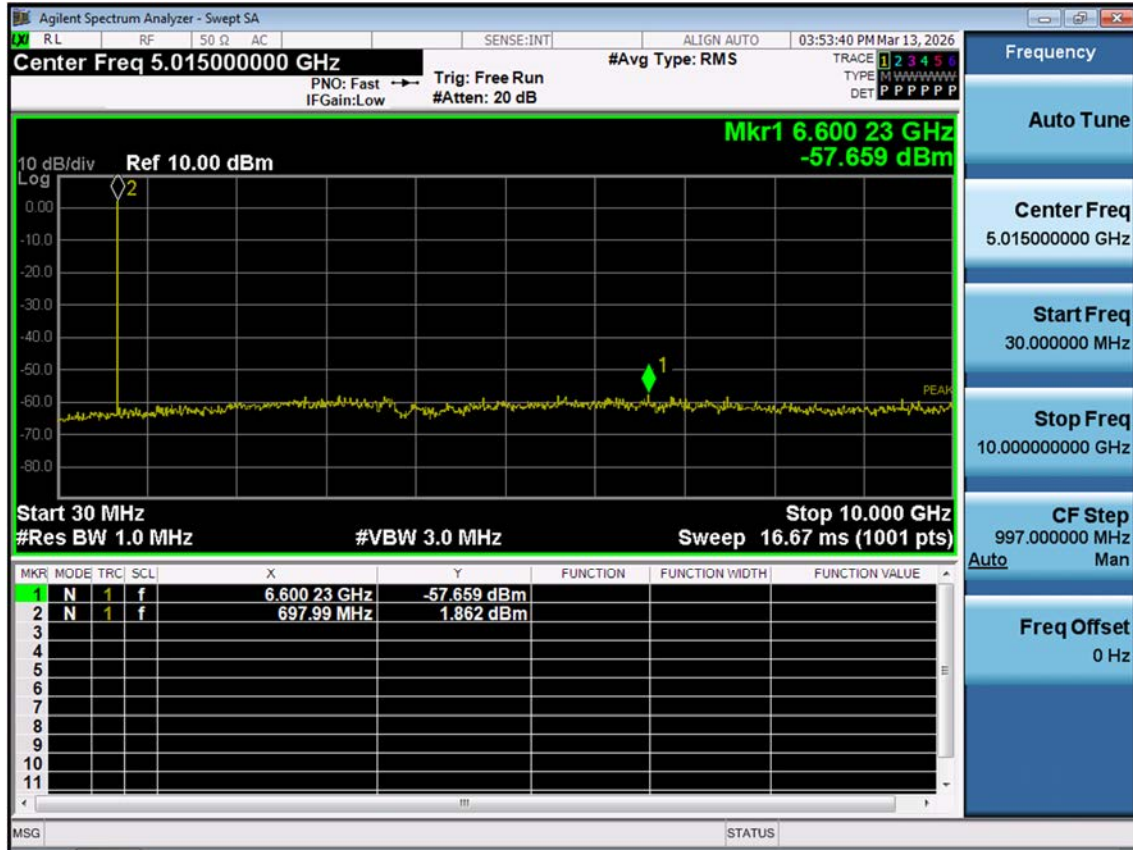


LTE B12_5 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

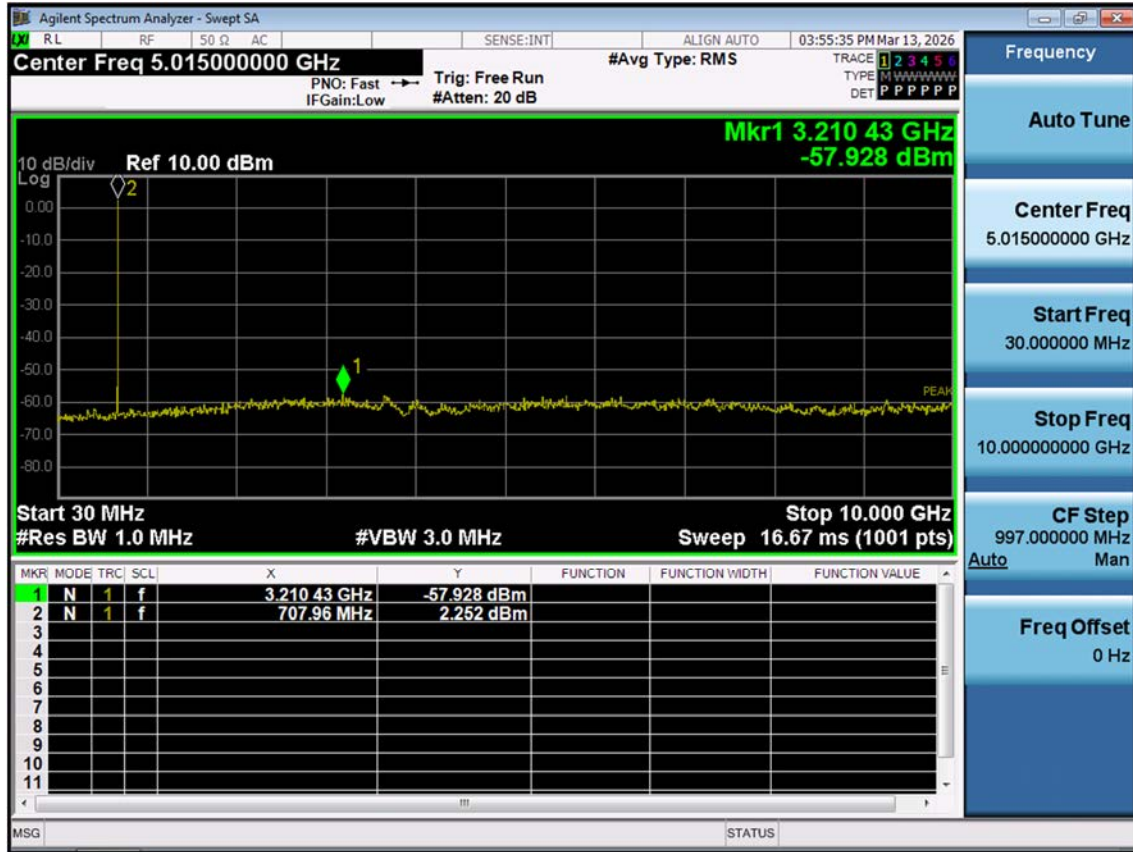


LTE B12_5 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

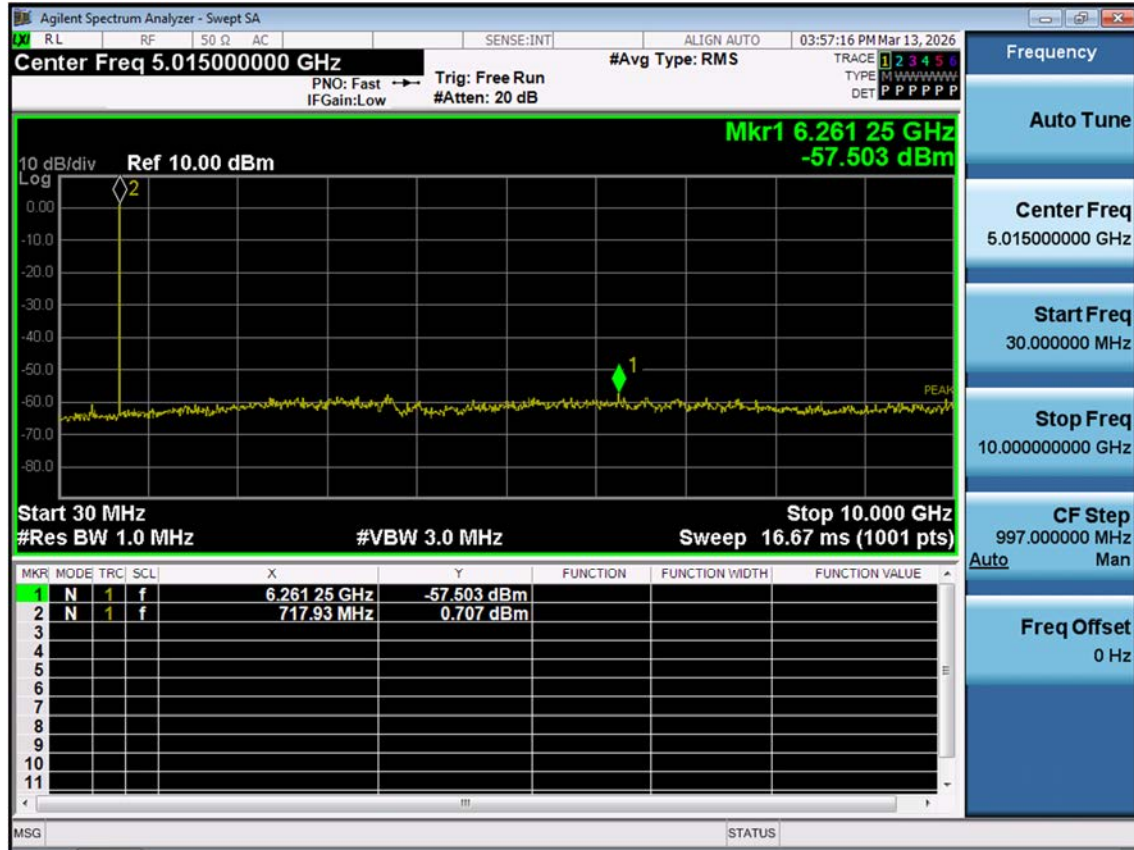


LTE B12_10 M_Conducted Spurious Emissions(30 M-10 G)_Low_QPSK_1RB

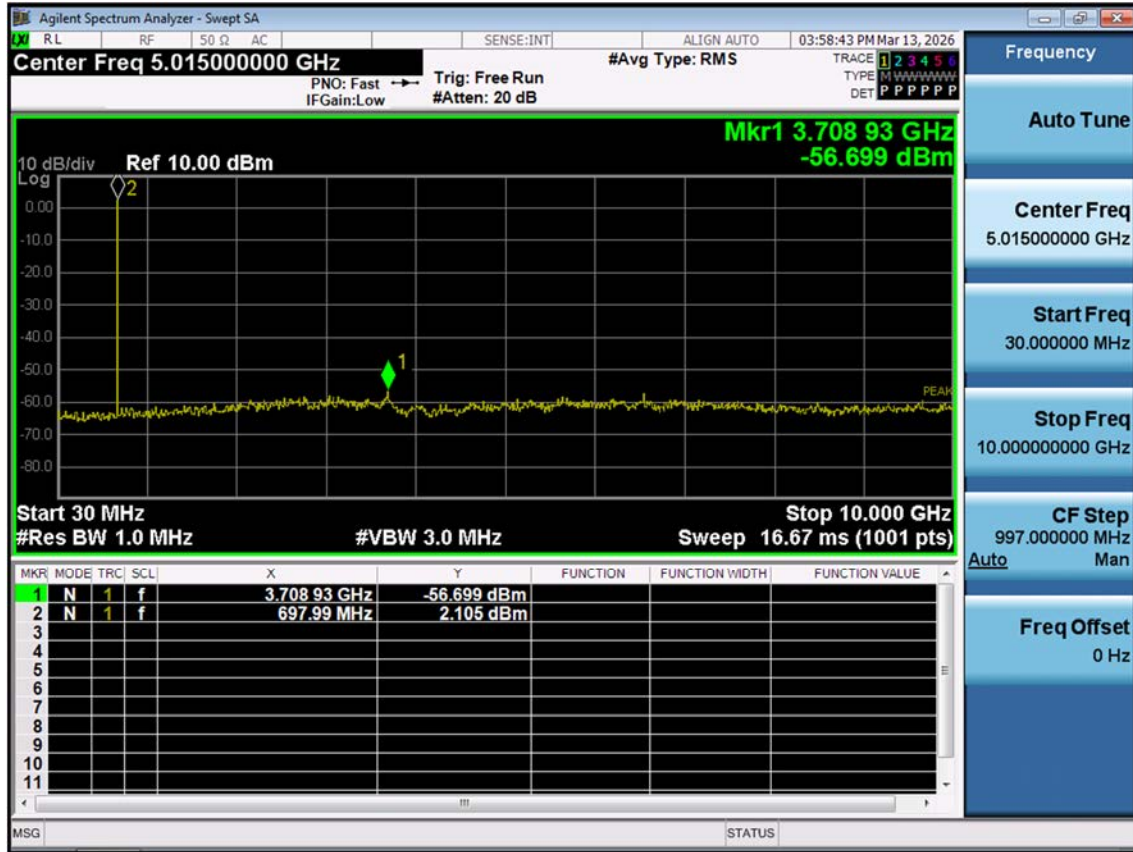

LTE B12_10 M_Conducted Spurious Emissions(30 M-10 G)_Mid_QPSK_1RB

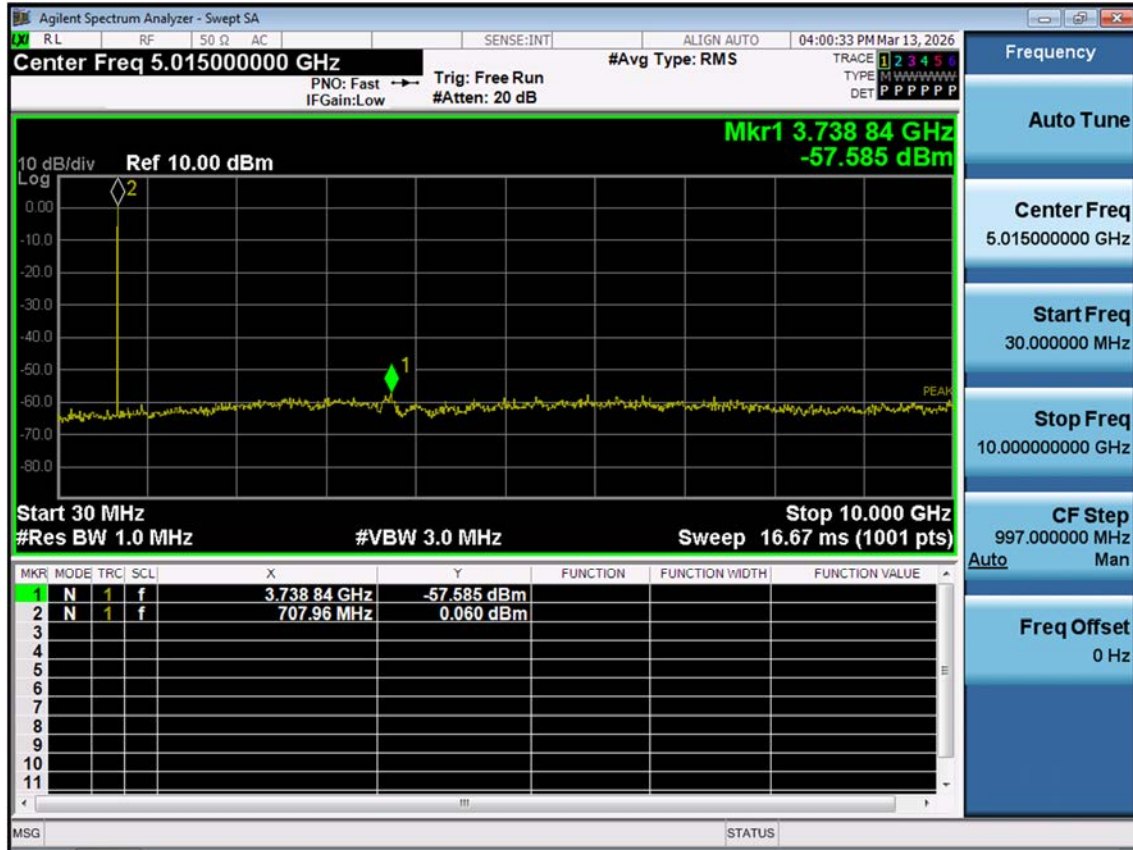


LTE B12_10 M_Conducted Spurious Emissions(30 M-10 G)_High_QPSK_1RB

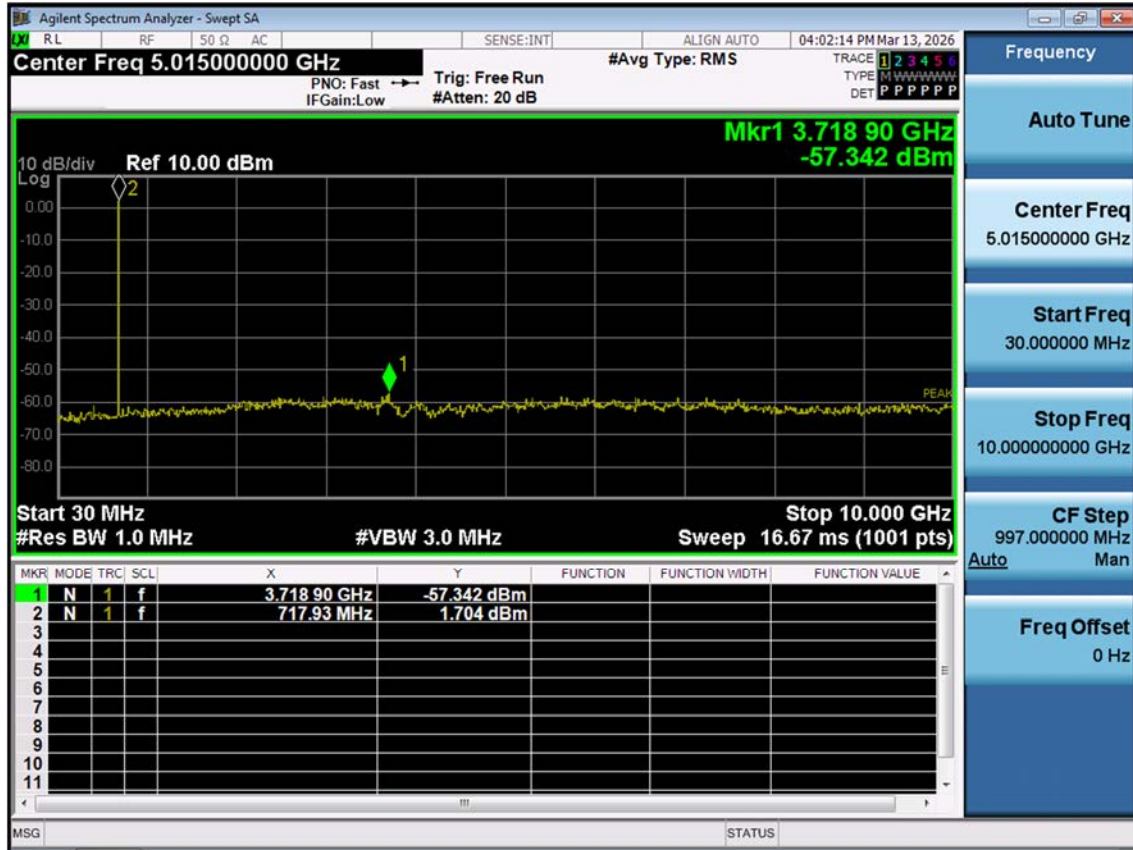

9.4 BAND EDGE

LTE B12_1.4 M_Band Edge_Low_QPSK_1RB

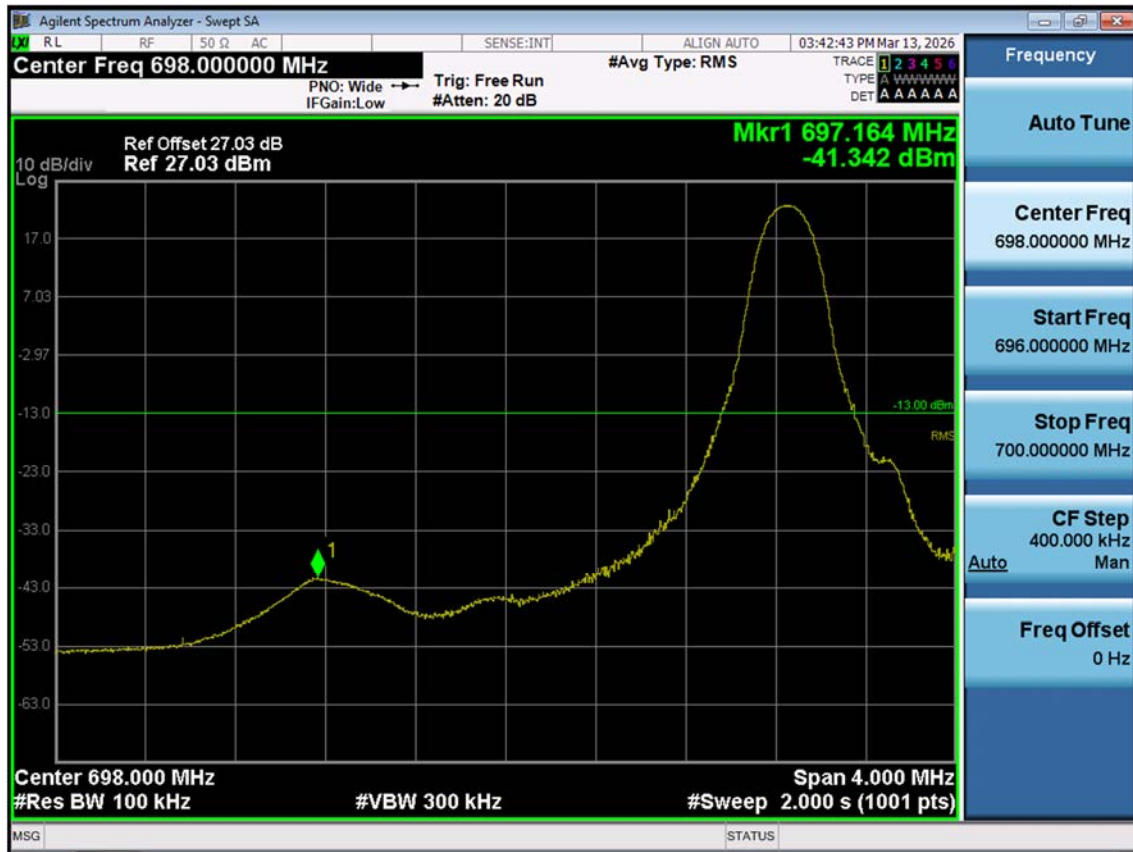


LTE B12_1.4 M_Band Edge_Low_QPSK_FullRB



LTE B12_1.4 M_Extended Band Edge_Low_QPSK_FullIRB



LTE B12_1.4 M_Band Edge_High_QPSK_1RB(1)

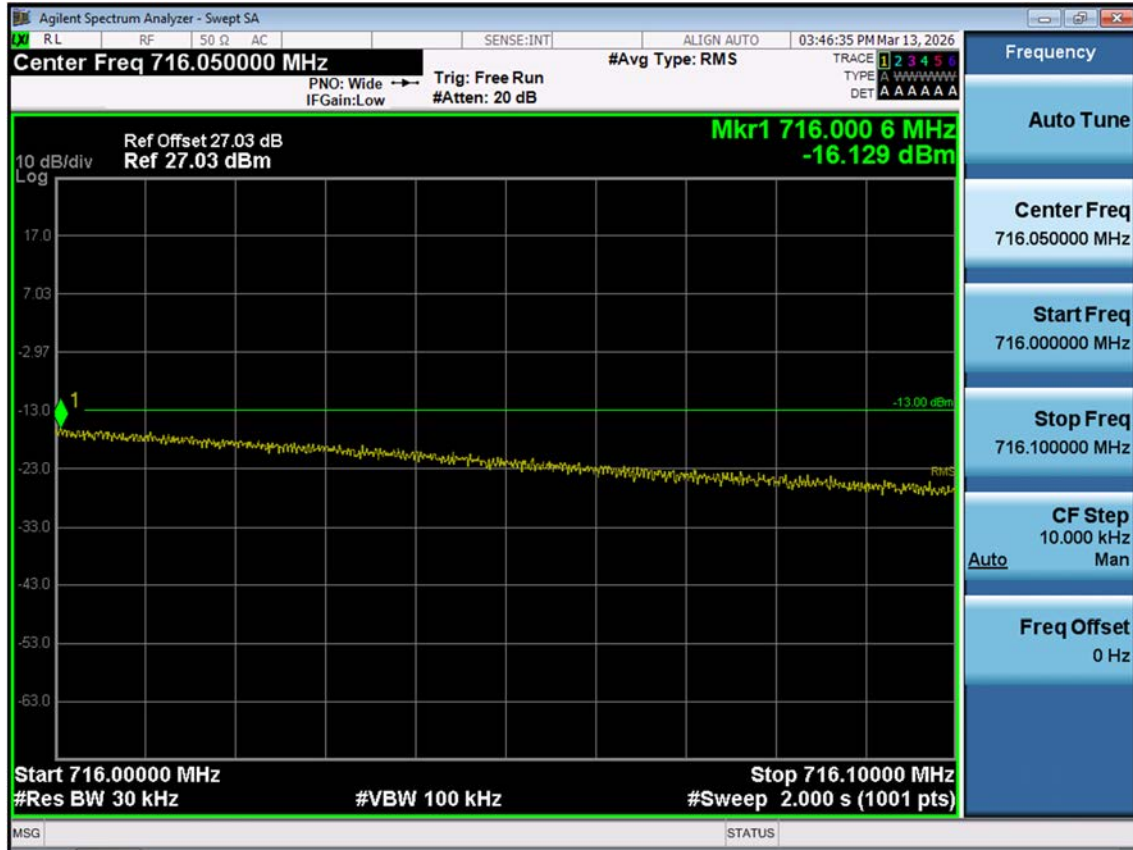

LTE B12_1.4 M_Band Edge_High_QPSK_1RB(2)



LTE B12_1.4 M_Band Edge_High_QPSK_FullRB



LTE B12_1.4 M_Extended Band Edge_High_QPSK_FullRB



LTE B12_3 M_Band Edge_Low_QPSK_1RB




LTE B12_3 M_Band Edge_Low_QPSK_FullRB



LTE B12_3 M_Extended Band Edge_Low_QPSK_FullRB



LTE B12_3 M_Band Edge_High_QPSK_1RB(1)

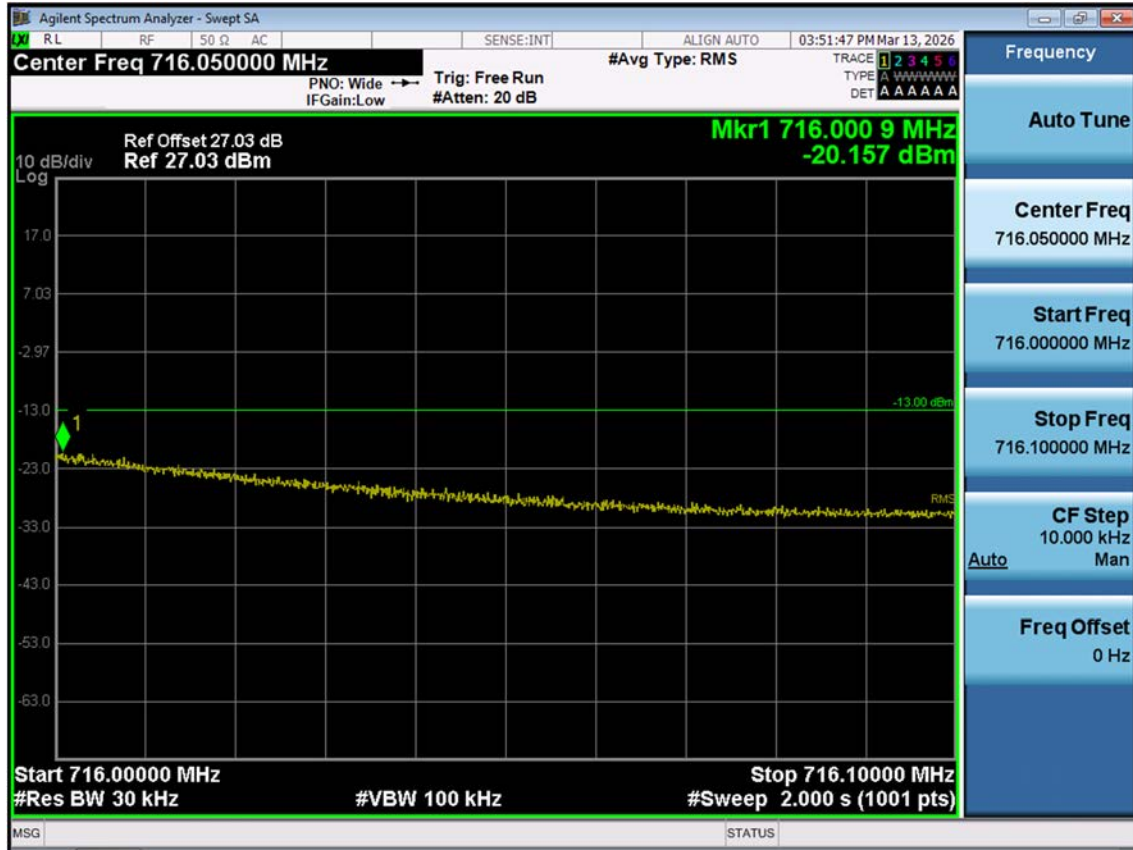

LTE B12_3 M_Band Edge_High_QPSK_1RB(2)



LTE B12_3 M_Band Edge_High_QPSK_FullRB



LTE B12_3 M_Extended Band Edge_High_QPSK_FullRB



LTE B12_5 M_Band Edge_Low_QPSK_1RB



LTE B12_5 M_Band Edge_Low_QPSK_FullRB



LTE B12_5 M_Extended Band Edge_Low_QPSK_FullRB



LTE B12_5 M_Band Edge_High_QPSK_1RB(1)

