verify No.377180663364

위변조방지/진위확인
www.docuqr.com

TEST REPORT

Eurofins KCTL Co.,Ltd.
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

eurofins | KCTL

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2022-10-17

2. Use of Report : Certification

3. Name of Product / Model : Mobile phone / SM-A346B/DSN

4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Vietnam

5. FCC ID : A3LSMA346B

6. Date of Test : 2022-11-09 to 2023-01-04

7. Location of Test : ■ Permanent Testing Lab ☐ On Site Testing
(Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

8. Test method used : FCC Part 2
FCC Part 90 subpart S

9. Test Result : Refer to the test result in the test report

Affirmation	Tested by Name : Sunghyun Yoon (Signature)	Technical Manager Name : Seungyong Kim (Signature)

2023-01-20

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

REPORT REVISION HISTORY

Date	Revision	Page No
2023-01-17	Originally issued	-
2023-01-20	Updated to TCB comment	6 ~ 7

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR23-SRF0032 is superseded by the report No. KR23-SRF0032-A.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ **Statement not required by the standard or client used for type testing**

CONTENTS

1. General information 4
2. Device information 4
2.1. Frequency/channel operations 5
3. Introduction 6
3.1 Difference 6
3.2 Spot check verification data (ERP/EIRP & Spurious emission) 6
3.3 Reference Detail 7
4. Maximum output power 8
5. Summary of tests 9
5.1. Worst case orientation 9
6. Measurement uncertainty 10
7. Test results 11
7.1. Radiated Power (ERP/EIRP) 11
7.2 Radiated Spurious Emissions 15
8. Measurement equipment 19

1. General information

Client	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Factory	:	Samsung Electronics Vietnam Thai Nguyen Co., Ltd
Address	:	Yen Binh Industrial Park, Dong Tien Ward, Pho Yen Town, Thai Nguyen Province, Vietnam
Laboratory	:	Eurofins KCTL Co.,Ltd.
Address	:	65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations	:	FCC Site Designation No: KR0040, FCC Site Registration No: 687132 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056 CAB Identifier: KR0040 ISED Number: 8035A KOLAS No.: KT231

2. Device information

Equipment under test	:	Mobile phone		
Model	:	SM-A346B/DSN		
Modulation technique	:	QPSK, 16QAM, 64QAM		
Power source	:	DC 3.88 V		
Antenna specification	:	Main Antenna 1	:	Metal Antenna (LTE B2/4/5/12/17/26/66)
		Main Antenna 2	:	Metal Antenna (LTE B41)
Frequency range	:	LTE Band 2	:	1 850.7 ㎒ ~ 1 909.3 ㎒
		LTE Band 4	:	1 710.7 ㎒ ~ 1 754.3 ㎒
		LTE Band 5	:	824.7 ㎒ ~ 848.3 ㎒
		LTE Band 12	:	699.7 ㎒ ~ 715.3 ㎒
		LTE Band 17	:	706.5 ㎒ ~ 713.5 ㎒
		LTE Band 26	:	814.7 ㎒ ~ 848.3 ㎒
		LTE Band 41	:	2 498.5 ㎒ ~ 2 687.5 ㎒
		LTE Band 66	:	1 710.7 ㎒ ~ 1 779.3 ㎒
Bandwidth	:	LTE Band 2	:	1.4 ㎒, 3 ㎒, 5 ㎒, 10 ㎒, 15 ㎒, 20 ㎒
		LTE Band 4	:	1.4 ㎒, 3 ㎒, 5 ㎒, 10 ㎒, 15 ㎒, 20 ㎒
		LTE Band 5	:	1.4 ㎒, 3 ㎒, 5 ㎒, 10 ㎒
		LTE Band 12	:	1.4 ㎒, 3 ㎒, 5 ㎒, 10 ㎒
		LTE Band 17	:	5 ㎒, 10 ㎒
		LTE Band 26	:	1.4 ㎒, 3 ㎒, 5 ㎒, 10 ㎒, 15 ㎒
		LTE Band 41	:	5 ㎒, 10 ㎒, 15 ㎒, 20 ㎒
		LTE Band 66	:	1.4 ㎒, 3 ㎒, 5 ㎒, 10 ㎒, 15 ㎒, 20 ㎒
Software version	:	A346B.001		
Hardware version	:	REV1.0		
Test device serial No.	:	Conducted	:	R3CTA0N869H
		Radiated	:	R3CTA0N84EX
Operation temperature	:	-20 ℃ ~ 60 ℃		

2.1. Frequency/channel operations

This device contains the following capabilities:
WLAN (11a/b/g/n/ac), Bluetooth (BDR/EDR/BLE), LTE B2/4/5/12/17/26/41/66, GSM 850/1900, WCDMA 850/1700/1900, NFC

LTE Band 26

Ch.	Frequency (MHz)
26697	814.7
26783	823.3

Table 2.1-1. 1.4M BW

Ch.	Frequency (MHz)
26705	815.5
26775	822.5

Table 2.1-2. 3M BW

Ch.	Frequency (MHz)
26715	816.5
26765	821.5

Table 2.1-3. 5M BW

Ch.	Frequency (MHz)
26740	819.0

Table 2.1-4. 10M BW

Ch.	Frequency (MHz)
26765	821.5

Table 2.1-5. 15M BW

3. Introduction

This report referenced from the FCC ID : A3LSMA346M PCE WWAN (FCC CFR 47 Part 90).
And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

3.1 Difference

The FCC ID: A3LSMA346B shares the same enclosure and circuit board as FCC ID: A3LSMA346M. The WIFI/BT/BLE/NFC/GSM/WCDMA/LTE antenna and surrounding circuitry and layout are identical between these two units.
As for all bands, they have been verified and the parent model test results under FCC ID: A3LSMA346M shall remain representative of FCC ID: A3LSMA346B.

Note. The difference between the parent and variant is that the RF circuit for NR/LTE Bands (13/n5/n66), ULCA Band 4 and EN-DC for Band 2/66 in the parent model A3LSMA346M is removed from the variant model A3LSMA346B.

3.2 Spot check verification data (ERP/EIRP & Spurious emission)

Test band	Test item	Test mode	Bandwidth (㎒)	Channel	Measured frequency (㎒)	SM-A346M /DSN	SM-A346B /DSN	Deviation (㏈)
LTE B26	ERP	QPSK	15	26790	824.00	21.26	20.03	-1.15
	RSE	QPSK	15	26765	2 484.38	-53.10	-59.80	-6.70

Notes:

1. For FCC ID: A3LSMA346B has been verified the performance as for PCE WWAN identical with the FCC ID: A3LSMA346M.
2. Comparison of two models, the variant model emissions are less than 3 ㏈ higher than the parent model, and all test results are under FCC technical limits.
3. The test procedure(s) in this report were performed in accordance as following.
   - KDB 484596 D01 v01

3.3 Reference Detail

Reference application that contains the reused reference data in the individual test reports.

Equipment Class	Reference FCC ID	Application Type	Reference Test report Number	Exhibit Type	Variant Test Report Number	Date Re-used
DTS	A3LSMA346M	Original	KR23-SRF0005 (802.11b/g/n)	Test report	KR23-SRF0027	All
			KR23-SRF0004 (Bluetooth LE)	Test report	KR23-SRF0026	All
DSS	A3LSMA346M	Original	KR23-SRF0003 (Bluetooth)	Test report	KR23-SRF0025	All
NII	A3LSMA346M	Original	KP23-SRF0006 (802.11a/n/ac)	Test report	KR23-SRF0028	All
DXX	A3LSMA346M	Original	KP23-SRF0012 (NFC)	Test report	KR23-SRF0033	All
PCE	A3LSMA346M	Original	KR23-SRF0008 (2G, 3G)	Test report	KR23-SRF0030	All
			KR23-SRF0009 (LTE)	Test report	KR23-SRF0031	Partial[1),2)]
			KR23-SRF0010 (LTE Part90)	Test report	KR23-SRF0032	All

Notes:

1. This device does not support the LTE Band 13.
2. This device does not support sub antenna for usage of ULCA (LTE B4) and EN-DC (LTE B2/66).
3. This device does not support the 5GNR Bands of n5/n66.

4. Maximum output power

LTE Band 26 (Part 90)

Mode	Tx frequency (MHz)	Emission designator	Conducted	
			Max. power (dBm)	Max. power (W)
LTE Band 26	814.7 ~ 823.3	1M10G7D	23.49	0.223
		1M10W7D	22.52	0.179
	815.5 ~ 822.5	2M70G7D	23.47	0.222
		2M70W7D	23.01	0.200
	816.5 ~ 821.5	4M51G7D	23.64	0.231
		4M51W7D	22.43	0.175
	819.0	9M02G7D	23.44	0.221
		9M02W7D	23.06	0.202
	821.5	13M5G7D	23.42	0.220
		13M4W7D	23.02	0.200
Straddle channel	824.0	1M10G7D	23.32	0.215
		1M09W7D	22.37	0.173
		2M70G7D	23.26	0.212
		2M68W7D	22.88	0.194
		4M48G7D	23.49	0.223
		4M51W7D	22.34	0.171
		8M97G7D	23.41	0.219
		8M97W7D	22.97	0.198
		13M4G7D	23.36	0.217
		13M5W7D	22.92	0.196

5. Summary of tests

FCC Part section(s)	Parameter	Test Limit	Test Condition	Test results
22.913(a)(5)	Effective Radiated Power	< 7 Watts max. ERP	Radiated	Pass
2.1053 90.691(a)	Radiated Spurious Emissions	<43 + 10Log$_{10}$(P) ㏈		Pass

Notes:

1. The test procedure(s) in this report were performed in accordance as following.
   - ANSI C63.26-2015
   - ANSI/TIA-603-E-2016
   - KDB 971168 D01 v03r01
   - KDB 971168 D02 v02r01
2. Conducted power has been checked and it is same as original filing.

5.1. Worst case orientation

1. All modes of operation were investigated and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations in the test data.
2. Output power measurements were measured on QPSK, 16QAM, 64QAM and 256QAM modulation. All tests except output power was performed with QPSK and 16QAM modulation.
3. All the radiated tests have been performed several case. (Stand-alone, with accessories (DLC Cable etc.))
   - Worst case: Stand-alone
4. EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
5. Test Condition

Test condition	LTE Band	Modulation	Bandwidth (㎒)	RB size	RB offset
Radiated	B26 (Part90)	QPSK	15	1	0, 36, 74

6. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of k=2 to indicated a 95 % level of confidence. The measurement data shown herein meets of exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (±)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	Below 1 000 MHz	4.3 dB
	1 000 MHz ~ 18 000 MHz	3.8 dB
	Above 1 8000 MHz	5.9 dB

7. Test results

7.1. Radiated Power (ERP/EIRP)

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

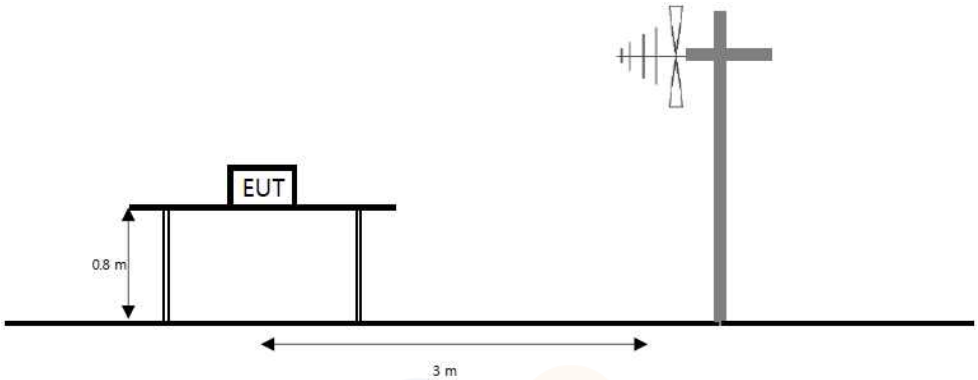

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

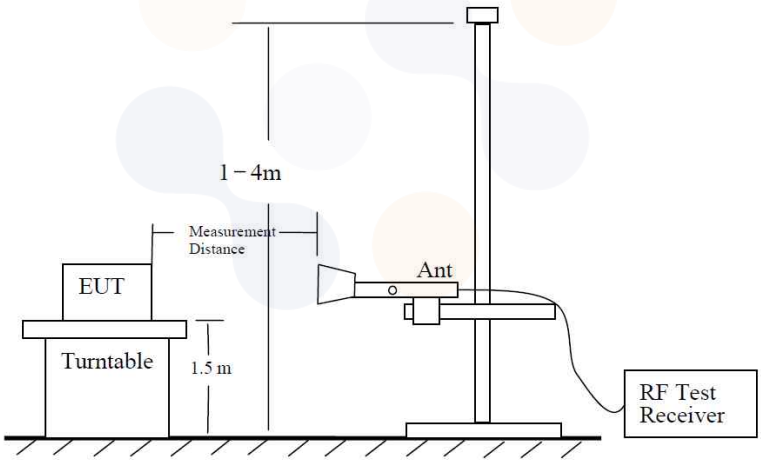

The diagram below shows the test setup for substituted method.

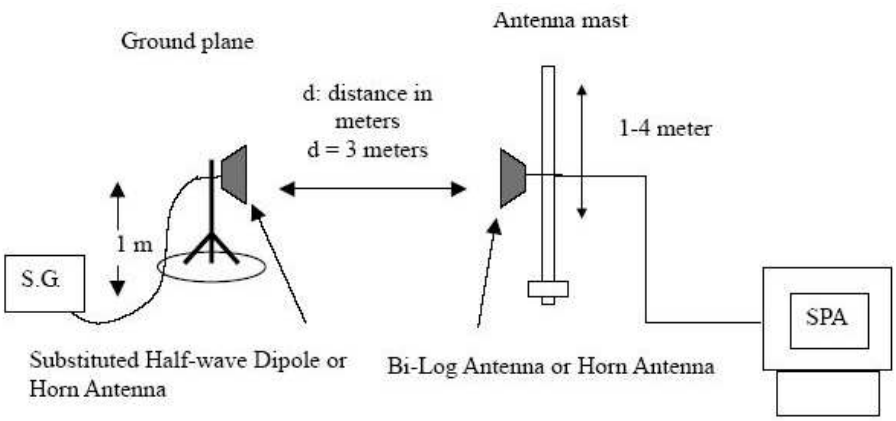

Limit

According to §90.635(b), the maximum output power of the transmitter for mobile stations is 100 watts(20 dBw).

Test procedure

971168 D01 v03r01 - Section 5.2 and 5.8
ANSI 63.26-2015 – Section 5.2
ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

1) RBW = 1 % to 5 % of the OBW.
2) VBW ≥ 3 × RBW.
3) SPAN = 2 × to 3 × the OBW.
4) Number of measurement points in sweep ≥ 2 × span / RBW.
5) Sweep time :
   1) Auto couple, or
   2) ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6) Detector = RMS
7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full -power transmissions).
9) Trace mode = trace averaging (RMS) over 100 sweeps.
10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
11) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to Correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 ㎓ below) or horn antenna (1 ㎓ above) connected to a signal generator.
   The power is calculated by the following formula;
   Pd(㏈m) = Pg(㏈m) – Cable loss (㏈) + Antenna gain (㏈)
   Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in ㏈m, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

Test results

Test mode: LTE Band 26

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[㎒]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
15 M	QPSK	824.0	H	0.08	4.88	23.65	20.03	0.101

Note.
1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi&dBd) - C.L(Cable loss) (dB)

7.2 Radiated Spurious Emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

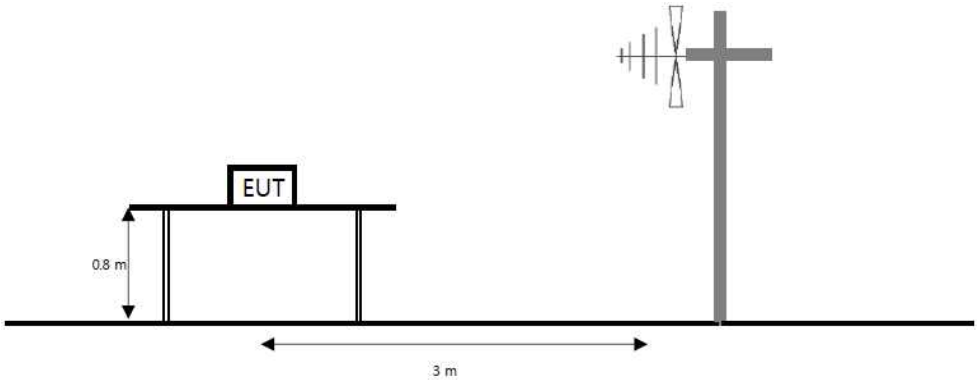

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

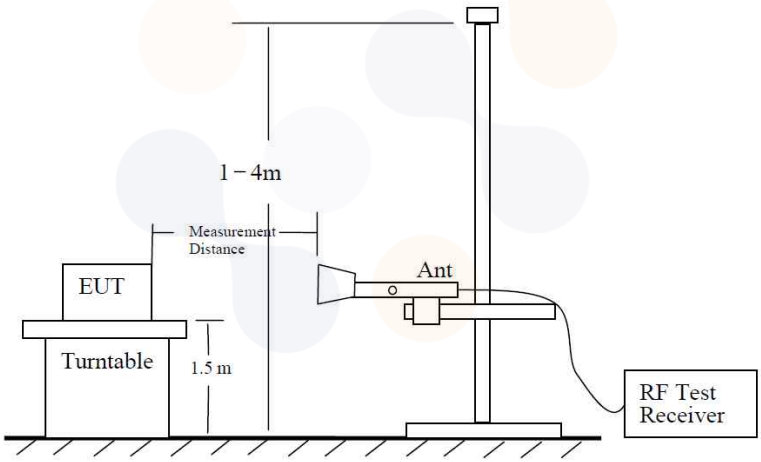

The diagram below shows the test setup for substituted method.

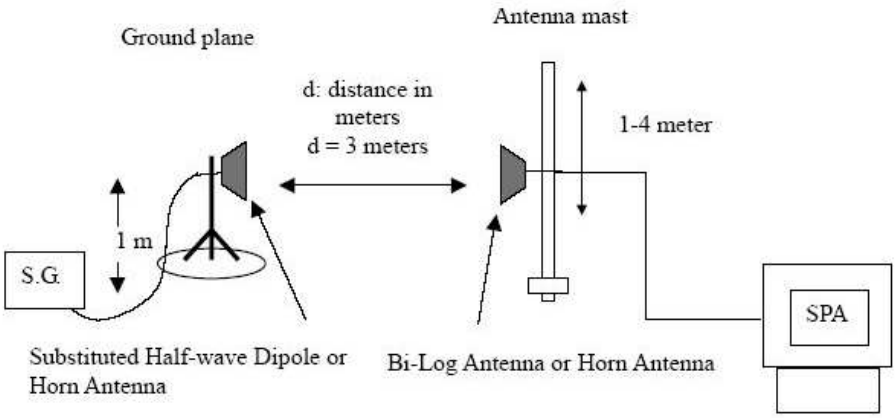

Limit

According to §90.691(a), Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 ㎑, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $Log_{10}(f/6.1)$ decibels or 50 + $10Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz where f is greater than 12.5 ㎑.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 ㎑, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + $10Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 ㎑.

Test procedure

971168 D01 v03r01 - Section 6.2
ANSI 63.26-2015 – Section 5.5
ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

1) RBW = 1 ㎑ for below 1 ㎓ and 1 ㎒ for above 1 ㎓.
2) VBW ≥ 3 × RBW.
3) Detector = RMS
4) Trace mode = Max hold
5) Sweep time = Auto couple
6) Number of sweep points ≥ 2 × span / RBW
7) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring corrected for the change of input attenuator setting of the measuring receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Test results (Above 1 000 ㎒)

Test mode : LTE Band 26
Frequency(㎒) : 821.5
Channel : 26765
Bandwidth(㎒) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[㎒]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 656.40	H	5.56	6.68	-59.78	-60.90	-13.00	47.90
	2 490.40	V	6.07	8.37	-57.50	-59.80	-13.00	46.80
	3 314.40	H	7.73	10.15	-57.48	-59.90	-13.00	46.90
	4 144.40	V	8.99	11.66	-57.73	-60.40	-13.00	47.40

Note.
1. E.R.P & E.I.R.P(㏈m) = Substitute Level(㏈) + Antenna gain(㏈i&㏈d) - C.L(Cable loss) (㏈)

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	AGILENT	N9040B	MY57010132	23.10.14
Wideband Radio Communication Tester	R&S	CMW500	141780	23.03.28
Signal Generator	R&S	SMB100A	176206	23.01.19
Bilog Antenna	Teseq GmbH	CBL 6143A	35039	23.05.12
Bilog Antenna	ETS.LINDGREN	3143B	00228420	23.09.28
Horn Antenna	ETS.LINDGREN	3117	161225	23.05.04
Horn Antenna	ETS.LINDGREN	3117	00227509	23.09.20
Horn Antenna	ETS.lindgren	3116	00086632	23.01.25
Horn Antenna	Steatite Antennas	QMS-00225	17790	23.07.14
Horn Antenna	Steatite Antennas	QMS-00238	17791	23.07.14
High Pass Filter	Wainwright Instruments GmbH	WHKX10-900-1000-15000-40SS	11	23.08.10
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40SS	32	23.08.10
Broadband Amplifier	SONOMA INSTRUMENT	315	300314	23.01.19
Low Noise Amplifier	TESTEK	TK-PA18H	220123-L	23.12.02*
Amplifier	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	23.01.21
Antenna Stand	innco systems GmbH	AS1500-EP-10kg	-	-
Antenna Stand	innco systems GmbH	AS1500-EP-10kg	-	-
Compact Table	innco systems GmbH	CT1000	-	-

*Tests related to this equipment were progressed after the calibration was completed

End of test report