

# TEST REPORT

FCC UNII Test for SM-A376U  
Certification

APPLICANT  
SAMSUNG Electronics Co., Ltd.

REPORT NO.  
HCT-RF-2512-FC040

DATE OF ISSUE  
December 16, 2025

Tested by  
Jeong Ho Kim



Technical Manager  
Jong Seok Lee



**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

## REPORT NO.

HCT-RF-2512-FC040

## DATE OF ISSUE

December 16, 2025

## Additional Model

SM-A376U1, SM-S376V

## Applicant

SAMSUNG Electronics Co., Ltd.  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

## Product Name

Mobile Phone

## Model Name

SM-A376U

## FCC ID

A3LSMA376U

## Date of Test

November 04, 2025 ~ December 16, 2025

## FCC Classification

Unlicensed National Information Infrastructure(NII)

## Test Standard Used

FCC Rule Part(s): Part 15.407

## Test Results

PASS

## Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue     | Description     |
|--------------|-------------------|-----------------|
| 0            | December 16, 2025 | Initial Release |

## Notice

---

### Content

---

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

|                                     |     |
|-------------------------------------|-----|
| 1. GENERAL INFORMATION              | 5   |
| EUT DESCRIPTION                     | 5   |
| ANTENNA CONFIGURATIONS              | 6   |
| 2. MAXIMUM OUTPUT POWER             | 8   |
| 3. TEST METHODOLOGY                 | 10  |
| EUT CONFIGURATION                   | 10  |
| EUT EXERCISE                        | 10  |
| GENERAL TEST PROCEDURES             | 10  |
| DESCRIPTION OF TEST MODES           | 11  |
| 4. INSTRUMENT CALIBRATION           | 11  |
| 5. FACILITIES AND ACCREDITATIONS    | 11  |
| 5.1 FACILITIES                      | 11  |
| 5.2 EQUIPMENT                       | 11  |
| 6. ANTENNA REQUIREMENTS             | 12  |
| 7. MEASUREMENT UNCERTAINTY          | 12  |
| 8. DESCRIPTION OF TESTS             | 13  |
| 9. SUMMARY OF TEST RESULTS          | 32  |
| 10. TEST RESULT                     | 33  |
| 10.1 DUTY CYCLE                     | 33  |
| 10.2 26 dB Bandwidth                | 36  |
| 10.3 6 dB BANDWIDTH                 | 42  |
| 10.4 OUTPUT POWER MEASUREMENT       | 46  |
| 10.5 POWER SPECTRAL DENSITY         | 52  |
| 10.6 FREQUENCY STABILITY            | 59  |
| 10.6.1 802.11ac 80 MHz BW           | 60  |
| 10.7 STRADDLE CHANNEL               | 64  |
| 10.8 RADIATED SPURIOUS EMISSIONS    | 85  |
| 10.9 RADIATED RESTRICTED BAND EDGE  | 91  |
| 10.10 POWERLINE CONDUCTED EMISSIONS | 107 |
| 11. LIST OF TEST EQUIPMENT          | 108 |
| 12. ANNEX A_ TEST SETUP PHOTO       | 110 |

## 1. GENERAL INFORMATION

### EUT DESCRIPTION

|                             |                                                     |                                                                               |
|-----------------------------|-----------------------------------------------------|-------------------------------------------------------------------------------|
| Model                       | SM-A376U                                            |                                                                               |
| Additional Model            | SM-A376U1, SM-S376V                                 |                                                                               |
| EUT Type                    | Mobile Phone                                        |                                                                               |
| Power Supply                | DC 3.90 V                                           |                                                                               |
| Modulation Type             | OFDM : 802.11a, 802.11n, 802.11ac                   |                                                                               |
| Frequency Range<br>(MHz)    | U-NII-1                                             | 20 MHz BW : 5180 - 5240<br>40 MHz BW : 5190 - 5230<br>80 MHz BW : 5210        |
|                             | U-NII-2A                                            | 20 MHz BW : 5260 - 5320<br>40 MHz BW : 5270 - 5310<br>80 MHz BW : 5290        |
|                             | U-NII-2C                                            | 20 MHz BW : 5500 - 5720<br>40 MHz BW : 5510 - 5710<br>80 MHz BW : 5530 - 5690 |
|                             | U-NII-3                                             | 20 MHz BW : 5745 - 5825<br>40 MHz BW : 5755 - 5795<br>80 MHz BW : 5775        |
|                             | U-NII-4                                             | 20 MHz BW : 5845 - 5885<br>40 MHz BW : 5835 - 5875<br>80 MHz BW : 5855        |
|                             |                                                     |                                                                               |
|                             |                                                     |                                                                               |
|                             |                                                     |                                                                               |
|                             |                                                     |                                                                               |
|                             |                                                     |                                                                               |
| Straddle channel            | Supported                                           |                                                                               |
| TDWR Band                   | Supported                                           |                                                                               |
| Dynamic Frequency Selection | Slave without radar detection                       |                                                                               |
| Antenna Information         | Please refer to the Antenna Specification document. |                                                                               |
| Serial number               | Conducted : R3CY90Z7ZCZ                             |                                                                               |
|                             | Radiated : R3CY90Z80FT                              |                                                                               |

## ANTENNA CONFIGURATIONS

### 1. Antenna configuration

| Configurations | SISO  |       | MIMO |     |
|----------------|-------|-------|------|-----|
|                | Ant.1 | Ant.2 | CDD  | SDM |
| 802.11a        | O     | X     | O    | X   |
| 802.11n        | O     | X     | X    | O   |
| 802.11ac       | O     | X     | X    | O   |

#### Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz Bands simultaneously on each antenna.

| Simultaneous transmission Scenario | 5 GHz WiFi Ant.1 | 5 GHz WiFi Ant.2 | BT Ant.1 | BT Ant.2 | Test Case  |
|------------------------------------|------------------|------------------|----------|----------|------------|
| BT ANT.1 +<br>5 GHz WiFi MIMO      | on               | on               | on       | -        | Scenario 1 |
| BT ANT.1 +<br>5 GHz WiFi ANT.1     | on               | -                | on       | -        | Scenario 2 |

### 3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left( \sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT}/N_{SS})$$

| Band    | Ant Gain (dBi) |       | N <sub>ANT</sub> / N <sub>SS</sub> | Directional Gain (dBi) |       |
|---------|----------------|-------|------------------------------------|------------------------|-------|
|         | ANT1           | ANT2  |                                    | CDD                    | SDM   |
| UNII 1  | -2.80          | -5.00 | 2 / 2                              | -0.82                  | -2.80 |
| UNII 2A | -2.80          | -5.50 |                                    | -1.04                  | -2.80 |
| UNII 2C | -2.20          | -4.70 |                                    | -0.35                  | -2.20 |
| UNII 3  | -2.90          | -3.80 |                                    | -0.33                  | -2.90 |
| UNII 4  | -3.90          | -3.90 |                                    | -0.89                  | -3.90 |

#### Note

According to Ansi C63.10-2020 section 14.6.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log \left( \left( 10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT}/N_{SS})$$

#### Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

#### Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

## 2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

| Band                             | Mode             | MIMO (Ant.1+ Ant.2) |       |             |       |                     |       |
|----------------------------------|------------------|---------------------|-------|-------------|-------|---------------------|-------|
|                                  |                  | Ant.1 Power         |       | Ant.2 Power |       | Ant.1 + Ant.2 Power |       |
|                                  |                  | (dBm)               | (W)   | (dBm)       | (W)   | (dBm)               | (W)   |
| UNII1                            | 802.11a          | 15.36               | 0.034 | 15.43       | 0.035 | 18.40               | 0.069 |
|                                  | 802.11n (HT20)   | 14.84               | 0.030 | 14.87       | 0.031 | 17.86               | 0.061 |
|                                  | 802.11n (HT40)   | 13.97               | 0.025 | 14.00       | 0.025 | 17.00               | 0.050 |
|                                  | 802.11ac (VHT20) | 14.77               | 0.030 | 14.83       | 0.030 | 17.82               | 0.060 |
|                                  | 802.11ac (VHT40) | 13.69               | 0.023 | 13.97       | 0.025 | 16.84               | 0.048 |
|                                  | 802.11ac (VHT80) | 11.22               | 0.013 | 10.86       | 0.012 | 14.05               | 0.025 |
| UNII2A                           | 802.11a          | 15.22               | 0.033 | 15.51       | 0.036 | 18.38               | 0.069 |
|                                  | 802.11n (HT20)   | 14.80               | 0.030 | 15.05       | 0.032 | 17.94               | 0.062 |
|                                  | 802.11n (HT40)   | 14.17               | 0.026 | 14.23       | 0.027 | 17.21               | 0.053 |
|                                  | 802.11ac (VHT20) | 14.76               | 0.030 | 15.06       | 0.032 | 17.93               | 0.062 |
|                                  | 802.11ac (VHT40) | 14.02               | 0.025 | 14.31       | 0.027 | 17.18               | 0.052 |
|                                  | 802.11ac (VHT80) | 10.09               | 0.010 | 9.64        | 0.009 | 12.88               | 0.019 |
| UNII2C                           | 802.11a          | 15.13               | 0.033 | 15.76       | 0.038 | 18.47               | 0.070 |
|                                  | 802.11n (HT20)   | 13.85               | 0.024 | 15.78       | 0.038 | 17.93               | 0.062 |
|                                  | 802.11n (HT40)   | 13.17               | 0.021 | 14.51       | 0.028 | 16.90               | 0.049 |
|                                  | 802.11ac (VHT20) | 13.98               | 0.025 | 15.83       | 0.038 | 18.01               | 0.063 |
|                                  | 802.11ac (VHT40) | 13.12               | 0.021 | 14.51       | 0.028 | 16.88               | 0.049 |
|                                  | 802.11ac (VHT80) | 13.08               | 0.020 | 13.58       | 0.023 | 16.35               | 0.043 |
| UNII3                            | 802.11a          | 14.86               | 0.031 | 15.53       | 0.036 | 18.22               | 0.066 |
|                                  | 802.11n (HT20)   | 14.87               | 0.031 | 16.01       | 0.040 | 18.49               | 0.071 |
|                                  | 802.11n (HT40)   | 12.72               | 0.019 | 15.18       | 0.033 | 17.13               | 0.052 |
|                                  | 802.11ac (VHT20) | 14.52               | 0.028 | 15.84       | 0.038 | 18.24               | 0.067 |
|                                  | 802.11ac (VHT40) | 12.71               | 0.019 | 14.78       | 0.030 | 16.88               | 0.049 |
|                                  | 802.11ac (VHT80) | 12.57               | 0.018 | 13.63       | 0.023 | 16.14               | 0.041 |
| UNII4<br>(Conducted<br>For inf.) | 802.11a          | 13.15               | 0.021 | 15.60       | 0.036 | 17.56               | 0.057 |
|                                  | 802.11n (HT20)   | 14.40               | 0.028 | 15.80       | 0.038 | 18.16               | 0.066 |
|                                  | 802.11n (HT40)   | 13.50               | 0.022 | 15.08       | 0.032 | 17.38               | 0.055 |
|                                  | 802.11ac (VHT20) | 13.89               | 0.025 | 15.91       | 0.039 | 18.03               | 0.063 |
|                                  | 802.11ac (VHT40) | 13.41               | 0.022 | 15.09       | 0.032 | 17.34               | 0.054 |
|                                  | 802.11ac (VHT80) | 12.33               | 0.017 | 14.30       | 0.027 | 16.44               | 0.044 |

| Band            | Mode             | MIMO (Ant.1+ Ant.2) (EIRP) |                  |               |       |             |                  |               |      |                       |                  |               |      |
|-----------------|------------------|----------------------------|------------------|---------------|-------|-------------|------------------|---------------|------|-----------------------|------------------|---------------|------|
|                 |                  | Ant.1 Power                |                  |               |       | Ant.2 Power |                  |               |      | (Ant.1 + Ant.2) Power |                  |               |      |
|                 |                  | (dBm)                      | ANT<br>Gain(dBi) | EIRP<br>(dBm) | (W)   | (dBm)       | ANT<br>Gain(dBi) | EIRP<br>(dBm) | (W)  | (dBm)                 | ANT<br>Gain(dBi) | EIRP<br>(dBm) | (W)  |
| UNII4<br>(EIRP) | 802.11a          | 13.15                      | -3.90            | 9.25          | 0.008 | 15.60       | -3.90            | 11.70         | 0.01 | 17.56                 | -0.89            | 16.67         | 0.05 |
|                 | 802.11n (HT20)   | 14.40                      | -3.90            | 10.50         | 0.011 | 15.80       | -3.90            | 11.90         | 0.02 | 18.16                 | -3.90            | 14.26         | 0.03 |
|                 | 802.11n (HT40)   | 13.50                      | -3.90            | 9.60          | 0.009 | 15.08       | -3.90            | 11.18         | 0.01 | 17.38                 | -3.90            | 13.48         | 0.02 |
|                 | 802.11ac (VHT20) | 13.89                      | -3.90            | 9.99          | 0.010 | 15.91       | -3.90            | 12.01         | 0.02 | 18.03                 | -3.90            | 14.13         | 0.03 |
|                 | 802.11ac (VHT40) | 13.41                      | -3.90            | 9.51          | 0.009 | 15.09       | -3.90            | 11.19         | 0.01 | 17.34                 | -3.90            | 13.44         | 0.02 |
|                 | 802.11ac (VHT80) | 12.33                      | -3.90            | 8.43          | 0.007 | 14.30       | -3.90            | 10.40         | 0.01 | 16.44                 | -3.90            | 12.54         | 0.02 |

### 3. TEST METHODOLOGY

Unlicensed wireless device were tested using the following measurement procedure.

- [1] KDB 789033 D02 15.407 Meas Guidance v02r01.
- [2] KDB 291074 D02 U-NII-4 band EMC Meas Guidance v01.
- [3] ANSI C63.10-2020.

#### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

#### GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average Measurement Typeor modes.

##### Radiated Emissions

According to the requirements in Section 6.3 ~ Section 6.6 of ANSI C63.10-2020

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes.

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of ANSI C63.5-2017.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea. The site is constructed in conformance with the requirements of ANSI C63.4-2014 and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to ANSI/USEMCSC C63.2-2023, "American National Standard for Specifications of Electromagnetic Interference and Field Strength Measuring Instrumentation in the Frequency Range 9 kHz to 40 GHz".

## 6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter           | Expanded Uncertainty ( $\pm$ kHz)        |
|---------------------|------------------------------------------|
| X dB, 99% Bandwidth | 95 (Confidence level about 95 %, $k=2$ ) |
| Frequency stability | 28 (Confidence level about 95 %, $k=2$ ) |


| Parameter                                | Expanded Uncertainty ( $\pm$ dB)           |
|------------------------------------------|--------------------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.54 (Confidence level about 95 %, $k=2$ ) |
| Conducted Output Power(Power Meter)      | 0.54 (Confidence level about 95 %, $k=2$ ) |
| Conducted Output Power(Signal Analyzer)  | 0.68 (Confidence level about 95 %, $k=2$ ) |
| Power Spectral Density                   | 1.03 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.36 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.68 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.75 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.82 (Confidence level about 95 %, $k=2$ ) |

## 8. DESCRIPTION OF TESTS

| Test Item                            | Test Procedure                                                                                                                                                         |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Duty Cycle                           | - KDB 789033 D02 – Section B.2                                                                                                                                         |
| 6 dB Bandwidth &<br>26dB Bandwidth   | - KDB 789033 D02 - Section C<br>- KDB 291074 D02 – Section 2.11                                                                                                        |
| Output Power                         | - KDB 789033 D02 - Section E                                                                                                                                           |
| Power Spectral Density               | - KDB 789033 D02 - Section F                                                                                                                                           |
| Frequency Stability                  | - ANSI C63.10-2020 - Section 6.8                                                                                                                                       |
| AC Power line Conducted<br>Emissions | - ANSI C63.10-2020– Section 6.2                                                                                                                                        |
| Radiated Test                        | - KDB 789033 D02 – Section II.G<br>- KDB 291074 D02 – Section 2.10<br>- ANSI C63.10-2020 – Section 6.5 (Below 1 GHz)<br>- ANSI C63.10-2020 – Section 6.6 (Above 1 GHz) |

### 8.1. Duty Cycle

#### Test Configuration

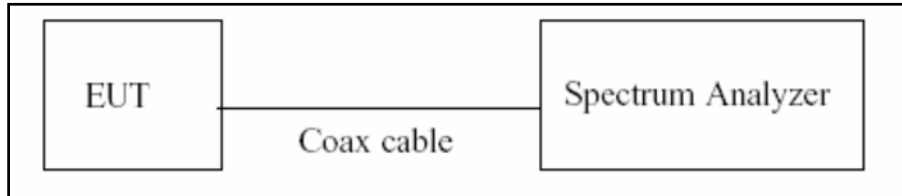

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Average
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure  $T_{\text{total}}$  and  $T_{\text{on}}$
8. Calculate Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 8.2. 6 dB Bandwidth & 26 dB Bandwidth

### Limit

Within the 5.725-5.85 GHz(NII-3) & 5.85-5.925 GHz(NII-4) band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Configuration

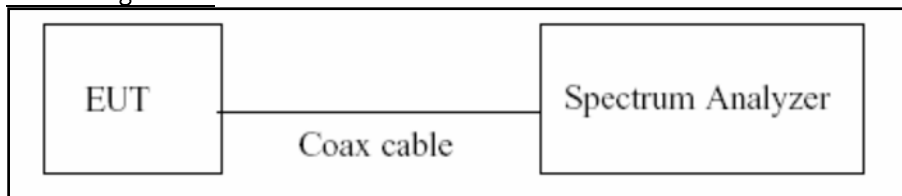

### Test Procedure (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

### Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

1. RBW = 100 kHz
2.  $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, we performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


### 8.3. Output Power Measurement

#### Limit


| Band        | Limit                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------|
| UNII 1      | - Master : Not exceed 1 W(=30 dBm)<br>- Slave : Not exceed 250 mW(=23.98 dBm)                                    |
| UNII 2A, 2C | Not exceed the lesser of 250 mW or 11 dBm + 10 log B,<br>(where B is the 26 dB emission bandwidth in megahertz.) |
| UNII 3      | Not exceed 1 W(=30 dBm)                                                                                          |
| UNII 4      | EIRP 30 dBm                                                                                                      |

#### Test Configuration

##### Power Meter

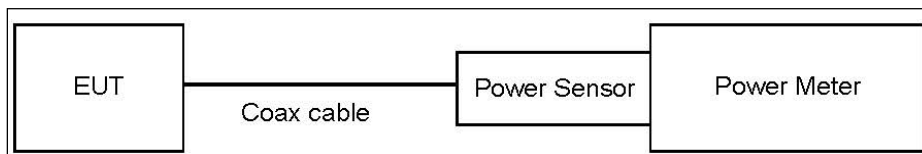

##### Spectrum Analyzer(Only Straddle Channel)

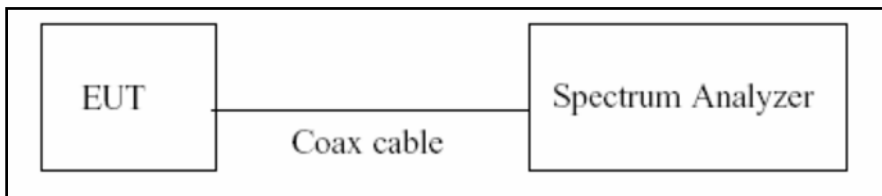

#### Test Procedure(Power Meter)

The transmitter output is connected to the Power Meter.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

### Test Procedure (Spectrum Analyzer)

We use the spectrum analyzer's integrated band power measurement function

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW  $\geq$  3 MHz.
5. Number of points in sweep  $\geq$  2 x span/RBW.
6. Sweep time = auto.
7. Measurement Type or = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add  $10\log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

### Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

### Note

1. Spectrum Measured Levels are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Actual value of loss for the attenuator and cable combination is below table.

| Band     | Loss(dB) |
|----------|----------|
| UNII 1   | 11.10    |
| UNII 2A  | 11.10    |
| UNII 2C  | 11.10    |
| UNII 3&4 | 11.10    |


(Actual value of loss for the attenuator and cable combination)

#### 8.4. Power Spectral Density

##### Limit

| Band        | Limit           |
|-------------|-----------------|
| UNII 1      | 11 dBm/MHz      |
| UNII 2A, 2C | 11 dBm/MHz      |
| UNII 3      | 30 dBm/500 kHz  |
| UNII 4      | EIRP 14 dBm/MHz |

##### Test Configuration

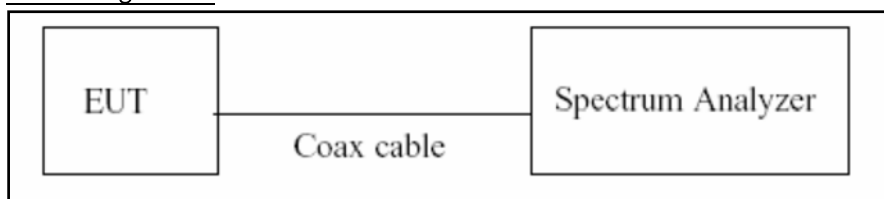

##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)  
→For portion within the NII-3 be used RBW 510kHz
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2 x span/RBW.
5. Sweep time = auto.
6. Measurement Typeor = RMS(i.e., power averaging), if available. Otherwise, use sample Measurement Typeor mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.

**Sample Calculation**

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Actual value of loss for the attenuator and cable combination is below table.

| Band     | Loss(dB) |
|----------|----------|
| UNII 1   | 11.10    |
| UNII 2A  | 11.10    |
| UNII 2C  | 11.10    |
| UNII 3&4 | 11.10    |


(Actual value of loss for the attenuator and cable combination)

## 8.5. Frequency Stability

### Limit

Maintained within the band

### Test Configuration

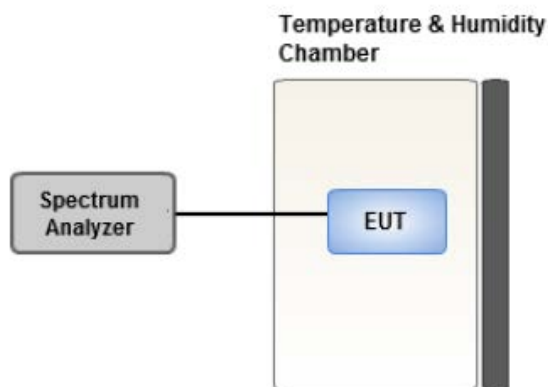

### Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

## 8.6. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V)     |                         |
|-----------------------|-------------------------|-------------------------|
|                       | Quasi-peak              | Average                 |
| 0.15 to 0.50          | 66 to 56 <sup>(a)</sup> | 56 to 46 <sup>(a)</sup> |
| 0.50 to 5             | 56                      | 46                      |
| 5 to 30               | 60                      | 50                      |

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

## 8.7. Radiated Test

### Limit


1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4. UNII 4: [Low Channel O.O.B.E] measured with a Peak detector

For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of  $-27$  dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

[High Channel O.O.B.E] measured with a RMS detector

For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of  $-5$  dBm/MHz and shall decrease linearly to an e.i.r.p. of  $-27$  dBm/MHz at or above 5.925 GHz.

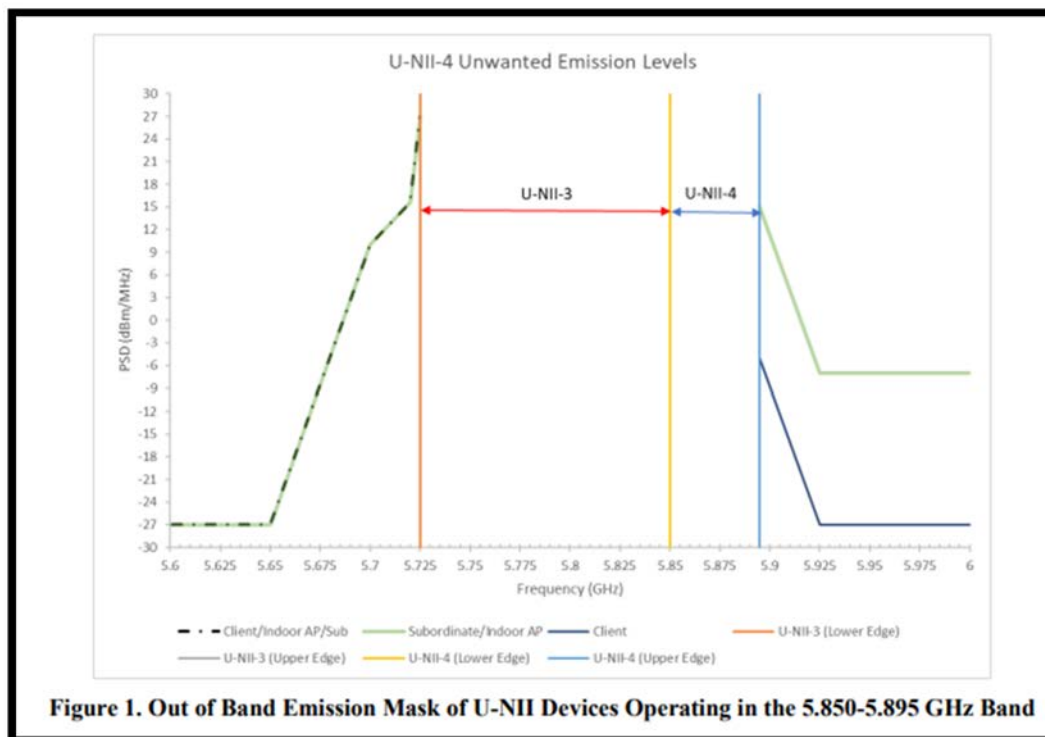


5. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 – 0.490   | $2400/F(\text{kHz})$               | 300                      |
| 0.490 – 1.705   | $24000/F(\text{kHz})$              | 30                       |
| 1.705 – 30      | 30                                 | 30                       |
| 30-88           | 100                                | 3                        |
| 88-216          | 150                                | 3                        |
| 216-960         | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

## Test Configuration


Below 30 MHz

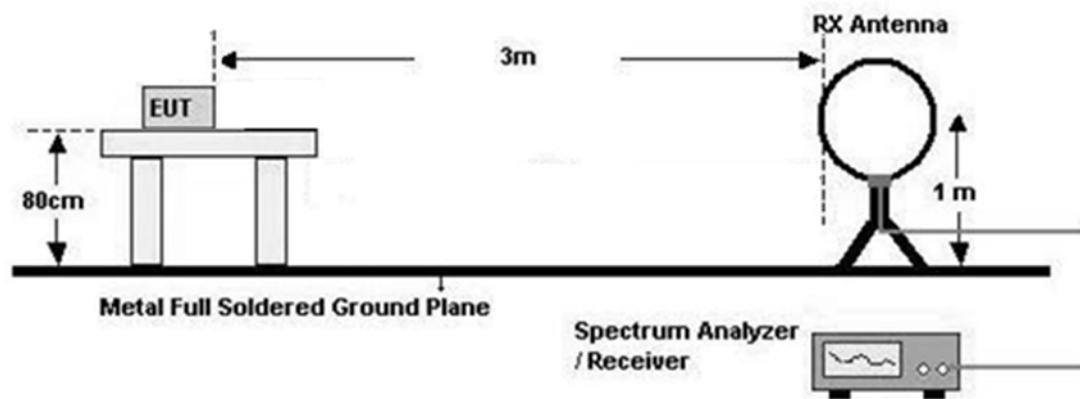

30 MHz - 1 GHz

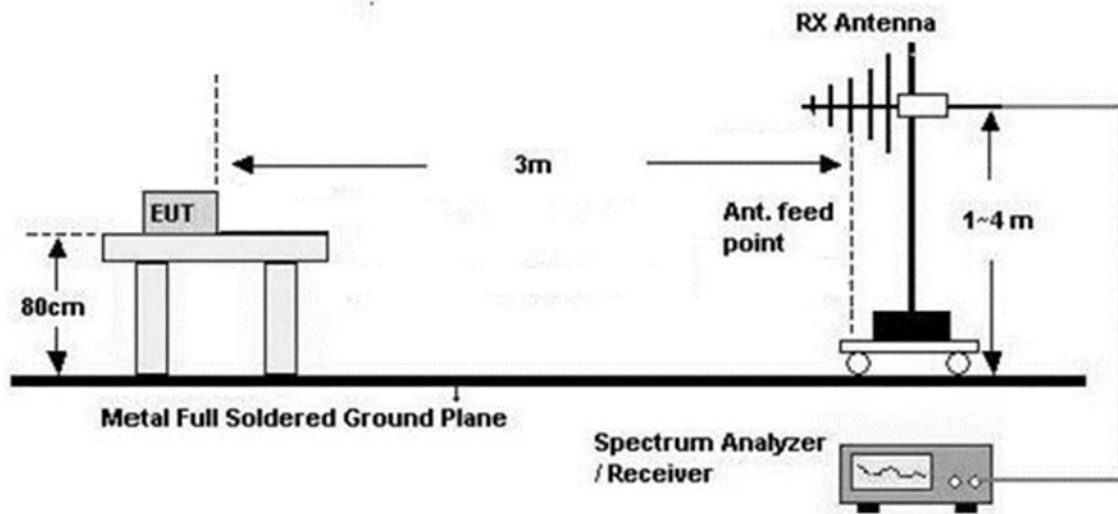

Above 1 GHz

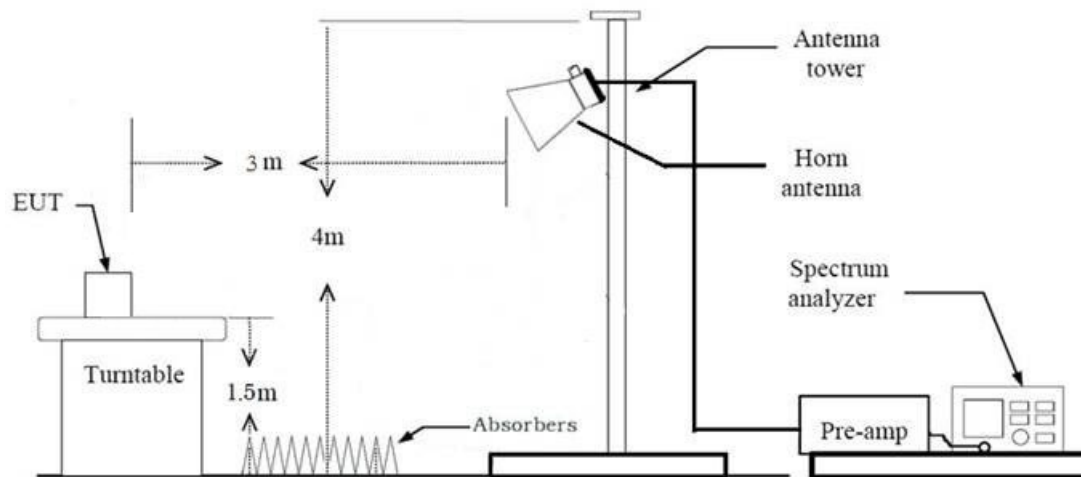

**Test Procedure of Radiated spurious emissions (Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. .We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Analyzer Setting  
Measurement Type(Peak) :
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max Hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions (Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

**6. Spectrum Analyzer Setting****(1) Measurement Type(Peak) :**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

**(2) Measurement Type(Quasi-peak) :**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

#### 7. Spectrum Analyzer Setting

##### (1) Measurement Type (Peak) :

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

##### (2) Measurement Type (Average) :

- RBW = 1 MHz
- VBW(Duty cycle  $\geq$  98 percent) = VBW  $\leq$  RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle  $<$  98 percent) = VBW  $\geq$   $1/T$ , where  $T$  is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor
9. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)  
+ Distance Factor(D.F)

### Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

#### 7. Spectrum Analyzer Setting

##### (1) Measurement Type (Peak) :

- RBW = 1 MHz
  - VBW  $\geq$  3 MHz
  - Detector = Peak
  - Sweep Time = auto
  - Trace mode = Max Hold
  - Allow sweeps to continue until the trace stabilizes.
- Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

##### (2) Measurement Type (Peak, Integration Method) :

- RBW = 100 KHz
- VBW  $\geq$  3 x RBW
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.
- Perform a band-power integration across the 1 MHz bandwidth in which the bandedge emission level is to be measured.

##### (3) Measurement Type (Average) :

- RBW = 1 MHz
- VBW(Duty cycle  $\geq$  98 percent) = VBW  $\leq$  RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle  $<$  98 percent) = VBW  $\geq$   $1/T$ , where  $T$  is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

## 8. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 350 MHz ~ 5 460 MHz
- 5 460 MHz ~ 5 470 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

## 9. Distance extrapolation factor = 20log (test distance / specific distance) (dB)

## 10. Total

## (1) Measurement(Peak)

= Measured Value(Peak)

## (2) Measurement(Avg)

= Measured Value (Avg)

- We apply to the offset in the range 1 GHz - 18 GHz.

- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp. Gain(A.G) + Attenuator (ATT)

The actual setting value of VBW(SISO)

| Mode            | Worst Data rate<br>(Mbps) | Duty Cycle | Duty Cycle<br>Factor<br>(dB) | The actual<br>setting<br>value of VBW<br>(Hz) |
|-----------------|---------------------------|------------|------------------------------|-----------------------------------------------|
| 802.11a         | 6                         | 0.919      | 0.367                        | 1 000                                         |
| 802.11n(HT20)   | MCS0                      | 0.925      | 0.338                        | 1 000                                         |
| 802.11n(HT40)   | MCS0                      | 0.860      | 0.654                        | 3 000                                         |
| 802.11ac(VHT20) | MCS0                      | 0.920      | 0.364                        | 1 000                                         |
| 802.11ac(VHT40) | MCS0                      | 0.841      | 0.750                        | 3 000                                         |
| 802.11ac(VHT80) | MCS0                      | 0.755      | 1.222                        | 5 000                                         |

The actual setting value of VBW(MIMO)

| Mode            | Worst Data rate<br>(Mbps) | Duty Cycle | Duty Cycle<br>Factor<br>(dB) | The actual<br>setting<br>value of VBW<br>(Hz) |
|-----------------|---------------------------|------------|------------------------------|-----------------------------------------------|
| 802.11a         | 6                         | 0.919      | 0.367                        | 1 000                                         |
| 802.11n(HT20)   | MCS8                      | 0.855      | 0.678                        | 3 000                                         |
| 802.11n(HT40)   | MCS8                      | 0.753      | 1.234                        | 3 000                                         |
| 802.11ac(VHT20) | MCS0                      | 0.865      | 0.628                        | 3 000                                         |
| 802.11ac(VHT40) | MCS0                      | 0.756      | 1.216                        | 3 000                                         |
| 802.11ac(VHT80) | MCS0                      | 0.623      | 2.053                        | 10 000                                        |

## 8.8. Worst case configuration and mode

### Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. SM-A376U, Additional Models were tested and the worst case results are reported.  
(Worst case: SM-A376U)

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories
  - Worstcase : Stand alone
2. All Antennas of operation were investigated and the worst case results are reported
  - Antenna Operation Type : SISO, MIMO\_CDD(Ant.1+Ant.2), MIMO\_SDM(Ant.1+Ant.2)
  - Worstcase :
    - Band Edge : MIMO\_CDD(Ant.1+Ant.2), MIMO\_SDM(Ant.1+Ant.2)
    - R.S.E : MIMO\_CDD(Ant.1+Ant.2),
3. EUT Axis
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : X
4. All datarate of operation were investigated and the worst case datarate results are reported.
  - 802.11a : 6 Mbps
  - 802.11n\_HT20 : MCS8
  - 802.11n\_HT40 : MCS8
  - 802.11ac\_VHT20 : MCS0
  - 802.11ac\_VHT40 : MCS0
  - 802.11ac\_VHT80 : MCS0
5. Radiated Spurious Emission
  - All modulations of operation were investigated and the worst case modulation results are reported.
  - Worst-case : 802.11a\_6 Mbps
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position: Horizontal, Vertical, Parallel to the ground plane
7. SM-A376U, Additional Models were tested and the worst case results are reported.  
(Worst case: SM-A376U)

### Radiated test(Simultaneous transmission Scenario)

1. Please refer to the [BT LE], [UNII ax] Test Report.

**AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories + Travel Adapter,

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-A376U, Additional Models were tested and the worst case results are reported.

(Worst case: SM-A376U)

## 9. SUMMARY OF TEST RESULTS

| Test Item                                                                    | FCC Part Section(s)                                                          | Test Limit                                                                                                                                                                                | Test Condition | Test Result |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------|
| 26 dB Bandwidth                                                              | § 15.407<br>(for Power Measurement)                                          | N/A                                                                                                                                                                                       | Conducted      | PASS        |
| 6 dB Bandwidth                                                               | § 15.407(e)                                                                  | >500 kHz<br>(5725-5850 MHz)(UNII-3)<br>(5850-5895 MHz)(UNII-4)                                                                                                                            |                | PASS        |
| Maximum Conducted Output Power                                               | § 15.407(a)(1),(2),(3)                                                       | < 250 mW(5150-5250 MHz)<br><br>< 250 mW or 11+10log <sub>10</sub> (BW) dBm (5250-5350 MHz)<br><br>< 250 mW or 11+10log <sub>10</sub> (BW) dBm (5470-5725 MHz)<br><br><1 W (5725-5850 MHz) |                | PASS        |
| Maximum EIRP Output Power                                                    | § 15.407(a)(3)(iii)                                                          | < EIRP 30dBm (5850-5895 MHz)                                                                                                                                                              |                | PASS        |
| Maximum Power Spectral Density                                               | § 15.407(a)(1),(2),(3)                                                       | <11 dBm/ MHz (5150-5250 MHz)<br><11 dBm/ MHz (5250-5350 MHz)<br><11 dBm/ MHz (5470-5725 MHz)<br><30 dBm/500 kHz(5725-5850 MHz)<br>< EIRP 14 dBm/MHz(5850-5895 MHz)                        |                | PASS        |
| Frequency Stability                                                          | § 15.407(g)<br>§ 2.1055                                                      | Maintained within the band                                                                                                                                                                |                | PASS        |
| AC Conducted Emissions<br>150 kHz-30 MHz                                     | 15.207<br>15.407(b)(9)                                                       | <FCC 15.207 limits                                                                                                                                                                        |                | PASS        |
| Undesirable Emissions                                                        | § 15.407(b)<br>(1),(2),(3),(4)<br><br>§ 15.407(b)(5)(ii),(iii)<br>§ 15.35(b) | <-27 dBm/MHz EIRP<br>(UNII1, 2A, 2C)<br>cf. Section 8.6 (UNII 3&4)                                                                                                                        | Radiated       | PASS        |
| General Field Strength Limits(Restricted Bands and Radiated Emission Limits) | 15.205,<br>15.407(b)(9),(10)                                                 | Emissions in restricted bands must meet the radiated limits detailed in 15.209                                                                                                            |                | PASS        |

### Note:

1. UNII 2A, 2C: TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.
2. The decision rule applies 'simple acceptance'

## 10. TEST RESULT

### 10.1 DUTY CYCLE

#### [SISO(Ant.1)]

| Mode            | Data Rate (Mbps) | T <sub>on</sub> (ms) | T <sub>total</sub> (ms) | Duty Cycle | Duty Cycle Factor(dB) |
|-----------------|------------------|----------------------|-------------------------|------------|-----------------------|
| 802.11a         | 6M               | 1.428                | 1.554                   | 0.919      | 0.367                 |
| 802.11n(HT20)   | MCS0             | 1.337                | 1.445                   | 0.925      | 0.338                 |
| 802.11n(HT40)   | MCS0             | 0.664                | 0.772                   | 0.860      | 0.654                 |
| 802.11ac(VHT20) | MCS0             | 1.344                | 1.462                   | 0.920      | 0.364                 |
| 802.11ac(VHT40) | MCS0             | 0.668                | 0.794                   | 0.841      | 0.750                 |
| 802.11ac(VHT80) | MCS0             | 0.333                | 0.441                   | 0.755      | 1.222                 |


#### [MIMO(Ant.1+ Ant.2)]

| Mode            | Data Rate (Mbps) | T <sub>on</sub> (ms) | T <sub>total</sub> (ms) | Duty Cycle | Duty Cycle Factor(dB) |
|-----------------|------------------|----------------------|-------------------------|------------|-----------------------|
| 802.11a         | 6M               | 1.428                | 1.554                   | 0.919      | 0.367                 |
| 802.11n(HT20)   | MCS8             | 0.692                | 0.809                   | 0.855      | 0.678                 |
| 802.11n(HT40)   | MCS8             | 0.356                | 0.474                   | 0.753      | 1.234                 |
| 802.11ac(VHT20) | MCS0             | 0.696                | 0.805                   | 0.865      | 0.628                 |
| 802.11ac(VHT40) | MCS0             | 0.361                | 0.478                   | 0.756      | 1.216                 |
| 802.11ac(VHT80) | MCS0             | 0.193                | 0.309                   | 0.623      | 2.053                 |


## Test Plots\_

[SISO(Ant.1)]


802.11a

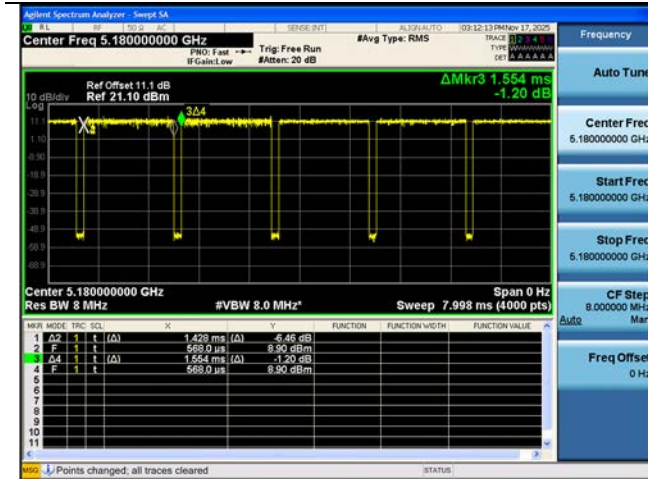


802.11n(HT20)

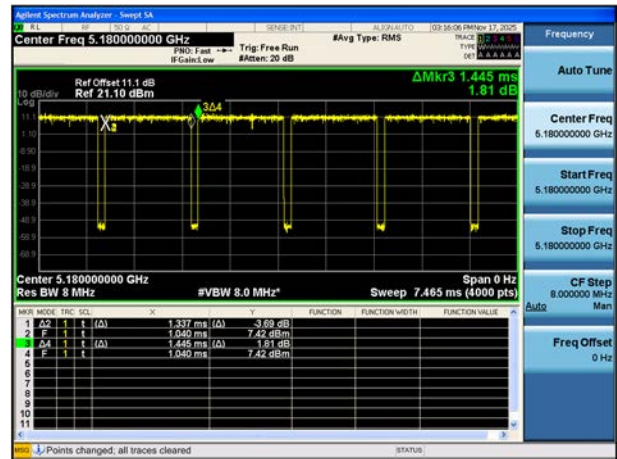


802.11n(HT40)

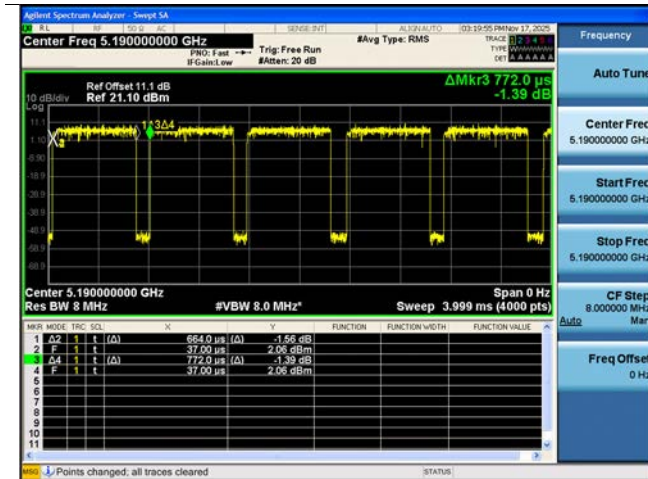


802.11ac(VHT20)

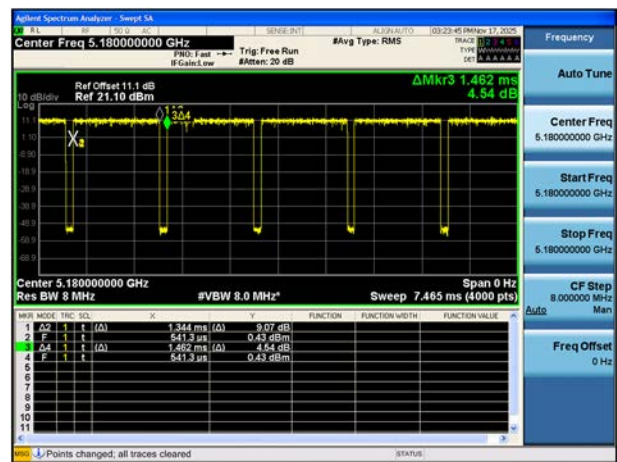

802.11ac(VHT40)

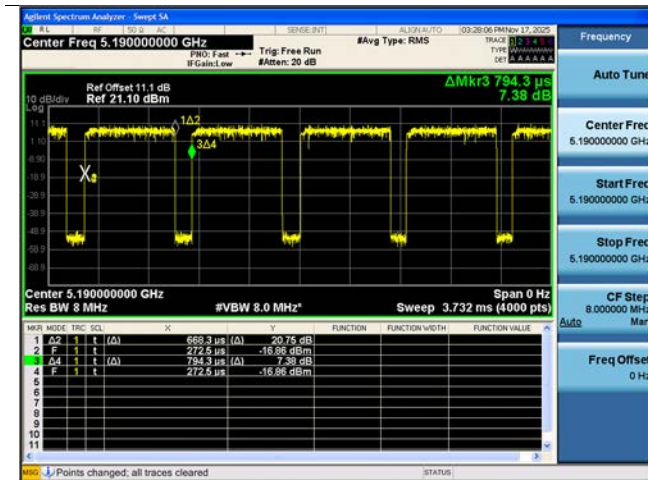


802.11ac(VHT80)

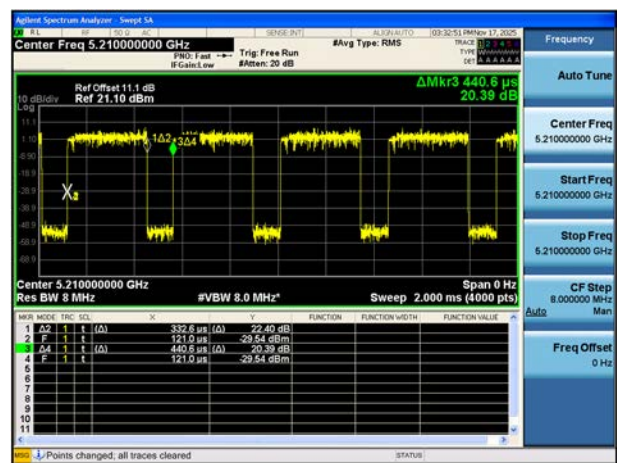


[MIMO(Ant.1+ Ant.2)]


802.11a

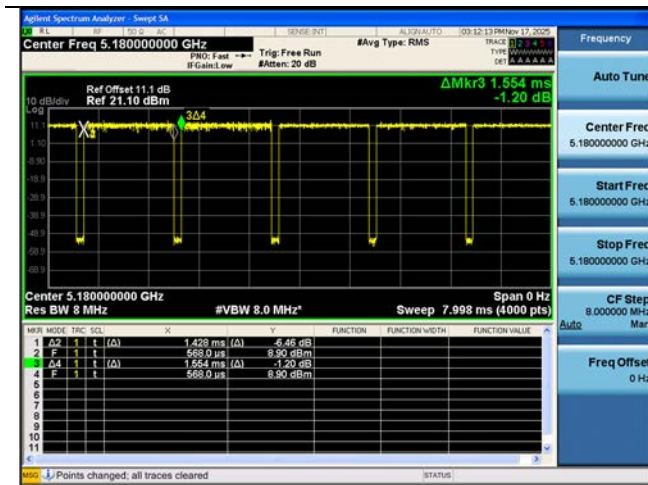


802.11n(HT20)

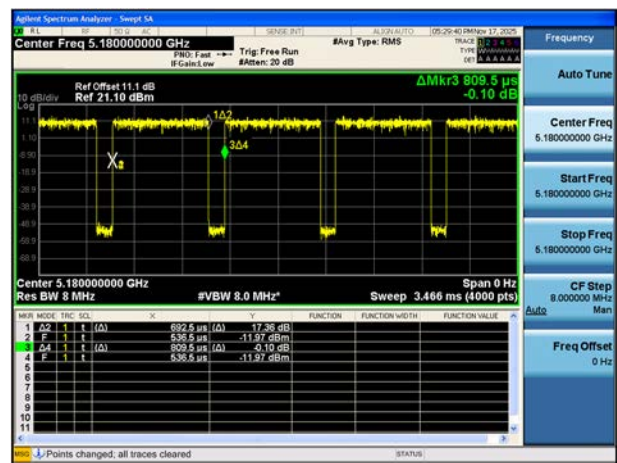


802.11n(HT40)

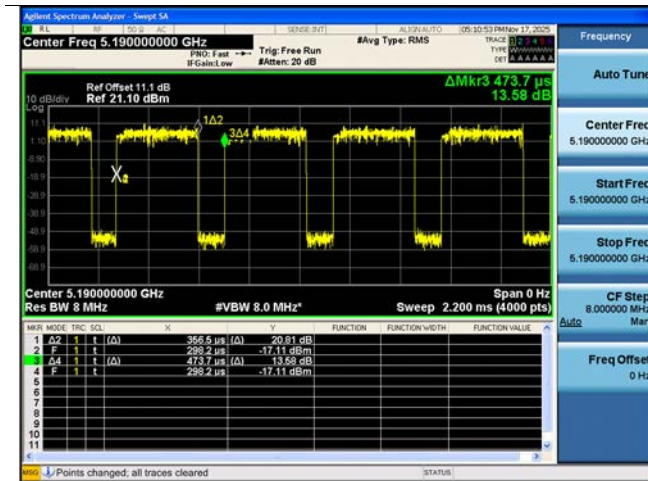


802.11ac(VHT20)

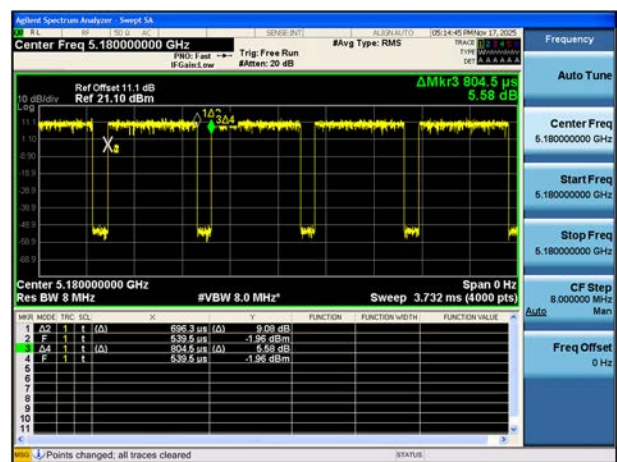

802.11ac(VHT40)

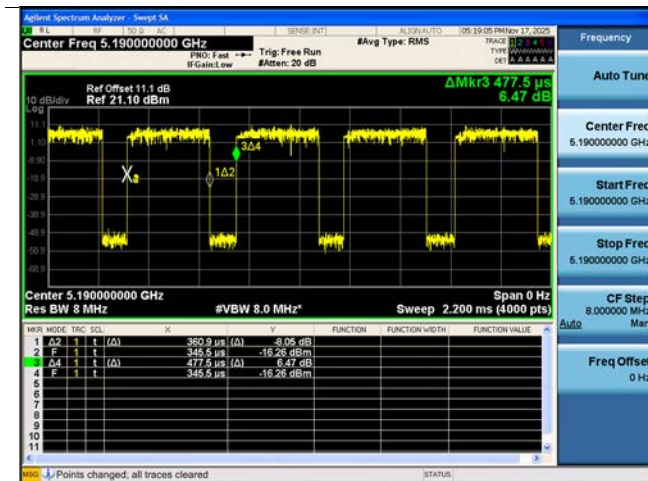

802.11ac(VHT80)

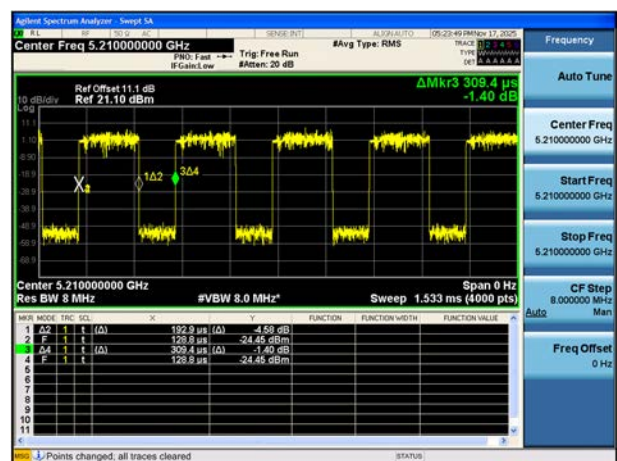

## 10.2 26 dB Bandwidth

### Note:

Straddle channel data in the table below are for reporting purposes only. Straddle channel data were added in section 10.7.1.

### [Ant.1]

| Mode : 802.11a |             |     |                       |                              |
|----------------|-------------|-----|-----------------------|------------------------------|
| BAND           | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1          | 5180        | 36  | 21.34                 | 16.585                       |
|                | 5200        | 40  | 21.66                 | 16.608                       |
|                | 5240        | 48  | 21.21                 | 16.597                       |
| UNII2A         | 5260        | 52  | 21.00                 | 16.608                       |
|                | 5300        | 60  | 21.07                 | 16.586                       |
|                | 5320        | 64  | 20.75                 | 16.615                       |
| UNII2C         | 5500        | 100 | 21.22                 | 16.616                       |
|                | 5600        | 120 | 21.01                 | 16.600                       |
|                | 5720        | 144 | 21.30                 | 16.590                       |
| UNII3          | 5745        | 149 | 21.29                 | 16.622                       |
|                | 5785        | 157 | 21.18                 | 16.602                       |
|                | 5825        | 165 | 20.98                 | 16.614                       |
| UNII4          | 5845        | 169 | 21.46                 | 16.605                       |
|                | 5865        | 173 | 21.32                 | 16.620                       |
|                | 5885        | 177 | 21.31                 | 16.612                       |

| Mode : 802.11n(HT20) |             |     |                       |                              |
|----------------------|-------------|-----|-----------------------|------------------------------|
| BAND                 | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                | 5180        | 36  | 22.46                 | 17.758                       |
|                      | 5200        | 40  | 22.13                 | 17.759                       |
|                      | 5240        | 48  | 22.41                 | 17.754                       |
| UNII2A               | 5260        | 52  | 22.22                 | 17.768                       |
|                      | 5300        | 60  | 22.37                 | 17.770                       |
|                      | 5320        | 64  | 21.72                 | 17.745                       |
| UNII2C               | 5500        | 100 | 22.10                 | 17.771                       |
|                      | 5600        | 120 | 22.08                 | 17.770                       |
|                      | 5720        | 144 | 22.36                 | 17.790                       |
| UNII3                | 5745        | 149 | 22.23                 | 17.750                       |
|                      | 5785        | 157 | 22.08                 | 17.757                       |
|                      | 5825        | 165 | 22.24                 | 17.758                       |
| UNII4                | 5845        | 169 | 22.35                 | 17.771                       |
|                      | 5865        | 173 | 22.35                 | 17.767                       |
|                      | 5885        | 177 | 22.30                 | 17.732                       |

| Mode : 802.11ac(VHT20) |             |     |                       |                              |
|------------------------|-------------|-----|-----------------------|------------------------------|
| BAND                   | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                  | 5180        | 36  | 21.85                 | 17.752                       |
|                        | 5200        | 40  | 21.91                 | 17.742                       |
|                        | 5240        | 48  | 22.20                 | 17.773                       |
| UNII2A                 | 5260        | 52  | 22.37                 | 17.764                       |
|                        | 5300        | 60  | 21.64                 | 17.780                       |
|                        | 5320        | 64  | 22.22                 | 17.735                       |
| UNII2C                 | 5500        | 100 | 22.06                 | 17.766                       |
|                        | 5600        | 120 | 22.23                 | 17.758                       |
|                        | 5720        | 144 | 22.26                 | 17.753                       |
| UNII3                  | 5745        | 149 | 22.01                 | 17.775                       |
|                        | 5785        | 157 | 21.88                 | 17.773                       |
|                        | 5825        | 165 | 22.31                 | 17.729                       |
| UNII4                  | 5845        | 169 | 22.26                 | 17.750                       |
|                        | 5865        | 173 | 21.78                 | 17.751                       |
|                        | 5885        | 177 | 22.38                 | 17.770                       |

| Mode : 802.11n(HT40) |             |     |                       |                              |
|----------------------|-------------|-----|-----------------------|------------------------------|
| BAND                 | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                | 5190        | 38  | 44.03                 | 36.603                       |
|                      | 5230        | 46  | 42.92                 | 36.443                       |
| UNII2A               | 5270        | 54  | 44.90                 | 36.570                       |
|                      | 5310        | 62  | 44.92                 | 36.561                       |
| UNII2C               | 5510        | 102 | 44.43                 | 36.599                       |
|                      | 5590        | 118 | 45.20                 | 36.604                       |
|                      | 5710        | 142 | 44.54                 | 36.658                       |
| UNII3                | 5755        | 151 | 45.00                 | 36.596                       |
|                      | 5795        | 159 | 43.88                 | 36.613                       |
| UNII4                | 5835        | 167 | 44.27                 | 36.579                       |
|                      | 5875        | 175 | 44.02                 | 36.608                       |

| Mode : 802.11ac(VHT40) |             |     |                       |                              |
|------------------------|-------------|-----|-----------------------|------------------------------|
| BAND                   | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                  | 5190        | 38  | 45.29                 | 36.627                       |
|                        | 5230        | 46  | 44.72                 | 36.601                       |
| UNII2A                 | 5270        | 54  | 44.34                 | 36.599                       |
|                        | 5310        | 62  | 44.60                 | 36.585                       |
| UNII2C                 | 5510        | 102 | 45.12                 | 36.561                       |
|                        | 5590        | 118 | 44.84                 | 36.561                       |
|                        | 5710        | 142 | 45.08                 | 36.594                       |
| UNII3                  | 5755        | 151 | 44.66                 | 36.534                       |
|                        | 5795        | 159 | 44.61                 | 36.606                       |
| UNII4                  | 5835        | 167 | 44.18                 | 36.580                       |
|                        | 5875        | 175 | 45.04                 | 36.573                       |

| Mode : 802.11ac(VHT80) |             |     |                       |                              |
|------------------------|-------------|-----|-----------------------|------------------------------|
| BAND                   | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                  | 5210        | 42  | 86.65                 | 76.256                       |
| UNII2A                 | 5290        | 58  | 86.28                 | 76.210                       |
| UNII2C                 | 5530        | 106 | 84.57                 | 76.184                       |
|                        | 5610        | 122 | 85.04                 | 76.091                       |
|                        | 5690        | 138 | 85.69                 | 76.139                       |
| UNII3                  | 5775        | 155 | 86.75                 | 76.282                       |
| UNII4                  | 5855        | 171 | 86.37                 | 76.153                       |

[Ant.2]

| Mode : 802.11a |             |     |                       |                              |
|----------------|-------------|-----|-----------------------|------------------------------|
| BAND           | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1          | 5180        | 36  | 21.21                 | 16.652                       |
|                | 5200        | 40  | 21.69                 | 16.641                       |
|                | 5240        | 48  | 21.93                 | 16.629                       |
| UNII2A         | 5260        | 52  | 21.85                 | 16.599                       |
|                | 5300        | 60  | 21.03                 | 16.613                       |
|                | 5320        | 64  | 21.07                 | 16.594                       |
| UNII2C         | 5500        | 100 | 20.91                 | 16.603                       |
|                | 5600        | 120 | 22.09                 | 16.624                       |
|                | 5720        | 144 | 22.35                 | 16.661                       |
| UNII3          | 5745        | 149 | 21.34                 | 16.632                       |
|                | 5785        | 157 | 21.78                 | 16.644                       |
|                | 5825        | 165 | 22.08                 | 16.647                       |
| UNII4          | 5845        | 169 | 21.82                 | 16.656                       |
|                | 5865        | 173 | 21.38                 | 16.659                       |
|                | 5885        | 177 | 21.94                 | 16.663                       |

| Mode : 802.11n(HT20) |             |     |                       |                              |
|----------------------|-------------|-----|-----------------------|------------------------------|
| BAND                 | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                | 5180        | 36  | 23.32                 | 17.776                       |
|                      | 5200        | 40  | 23.60                 | 17.817                       |
|                      | 5240        | 48  | 22.62                 | 17.790                       |
| UNII2A               | 5260        | 52  | 22.30                 | 17.797                       |
|                      | 5300        | 60  | 22.38                 | 17.797                       |
|                      | 5320        | 64  | 21.90                 | 17.726                       |
| UNII2C               | 5500        | 100 | 22.14                 | 17.741                       |
|                      | 5600        | 120 | 23.78                 | 17.846                       |
|                      | 5720        | 144 | 23.10                 | 17.817                       |
| UNII3                | 5745        | 149 | 22.65                 | 17.829                       |
|                      | 5785        | 157 | 23.21                 | 17.812                       |
|                      | 5825        | 165 | 24.20                 | 17.830                       |
| UNII4                | 5845        | 169 | 23.36                 | 17.816                       |
|                      | 5865        | 173 | 25.95                 | 17.861                       |
|                      | 5885        | 177 | 25.29                 | 17.831                       |

| Mode : 802.11ac(VHT20) |             |     |                       |                              |
|------------------------|-------------|-----|-----------------------|------------------------------|
| BAND                   | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                  | 5180        | 36  | 22.24                 | 17.777                       |
|                        | 5200        | 40  | 22.46                 | 17.796                       |
|                        | 5240        | 48  | 23.37                 | 17.768                       |
| UNII2A                 | 5260        | 52  | 22.16                 | 17.760                       |
|                        | 5300        | 60  | 22.42                 | 17.775                       |
|                        | 5320        | 64  | 21.80                 | 17.743                       |
| UNII2C                 | 5500        | 100 | 22.07                 | 17.741                       |
|                        | 5600        | 120 | 23.61                 | 17.824                       |
|                        | 5720        | 144 | 23.51                 | 17.830                       |
| UNII3                  | 5745        | 149 | 22.78                 | 17.809                       |
|                        | 5785        | 157 | 23.97                 | 17.848                       |
|                        | 5825        | 165 | 24.79                 | 17.817                       |
| UNII4                  | 5845        | 169 | 24.34                 | 17.858                       |
|                        | 5865        | 173 | 23.61                 | 17.832                       |
|                        | 5885        | 177 | 24.50                 | 17.799                       |

| Mode : 802.11n(HT40) |             |     |                       |                              |
|----------------------|-------------|-----|-----------------------|------------------------------|
| BAND                 | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                | 5190        | 38  | 45.61                 | 36.594                       |
|                      | 5230        | 46  | 45.70                 | 36.609                       |
| UNII2A               | 5270        | 54  | 44.56                 | 36.704                       |
|                      | 5310        | 62  | 45.15                 | 36.660                       |
| UNII2C               | 5510        | 102 | 57.38                 | 36.755                       |
|                      | 5590        | 118 | 46.44                 | 36.614                       |
|                      | 5710        | 142 | 45.35                 | 36.675                       |
| UNII3                | 5755        | 151 | 47.01                 | 36.598                       |
|                      | 5795        | 159 | 56.36                 | 36.698                       |
| UNII4                | 5835        | 167 | 56.90                 | 36.850                       |
|                      | 5875        | 175 | 38.30                 | 36.482                       |

| Mode : 802.11ac(VHT40) |             |     |                       |                              |
|------------------------|-------------|-----|-----------------------|------------------------------|
| BAND                   | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                  | 5190        | 38  | 44.44                 | 36.606                       |
|                        | 5230        | 46  | 44.09                 | 36.600                       |
| UNII2A                 | 5270        | 54  | 45.94                 | 36.664                       |
|                        | 5310        | 62  | 45.26                 | 36.653                       |
| UNII2C                 | 5510        | 102 | 43.96                 | 36.697                       |
|                        | 5590        | 118 | 45.65                 | 36.631                       |
|                        | 5710        | 142 | 46.40                 | 36.590                       |
| UNII3                  | 5755        | 151 | 45.93                 | 36.769                       |
|                        | 5795        | 159 | 46.39                 | 36.731                       |
| UNII4                  | 5835        | 167 | 45.74                 | 36.646                       |
|                        | 5875        | 175 | 45.80                 | 36.627                       |


| Mode : 802.11ac(VHT80) |             |     |                       |                              |
|------------------------|-------------|-----|-----------------------|------------------------------|
| BAND                   | Freq. [MHz] | CH. | 26 dB Bandwidth [MHz] | 99% Occupied Bandwidth [MHz] |
| UNII1                  | 5210        | 42  | 85.72                 | 76.164                       |
| UNII2A                 | 5290        | 58  | 85.72                 | 76.277                       |
| UNII2C                 | 5530        | 106 | 86.13                 | 76.292                       |
|                        | 5610        | 122 | 86.08                 | 76.148                       |
|                        | 5690        | 138 | 92.13                 | 76.154                       |
| UNII3                  | 5775        | 155 | 92.09                 | 76.175                       |
| UNII4                  | 5855        | 171 | 86.71                 | 76.216                       |

[ANT. 1]


## Test Plots

**Note:** In order to simplify the report, attached plots were only the widest channel per channel bandwidth.


Bandwidth 20M, 802.11n(HT20) Ch.36

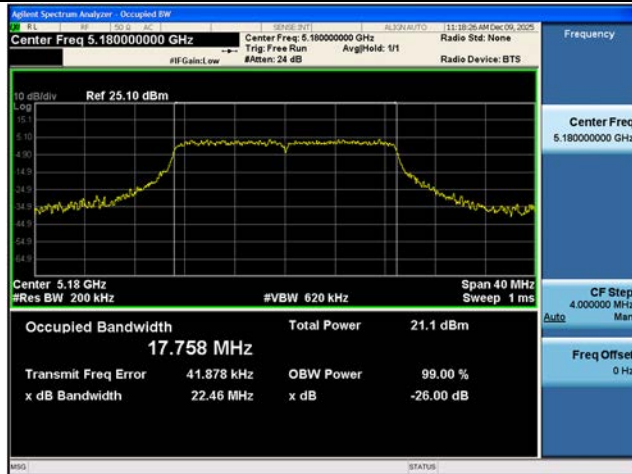

Bandwidth 40M, 802.11ac(VHT40) Ch.38

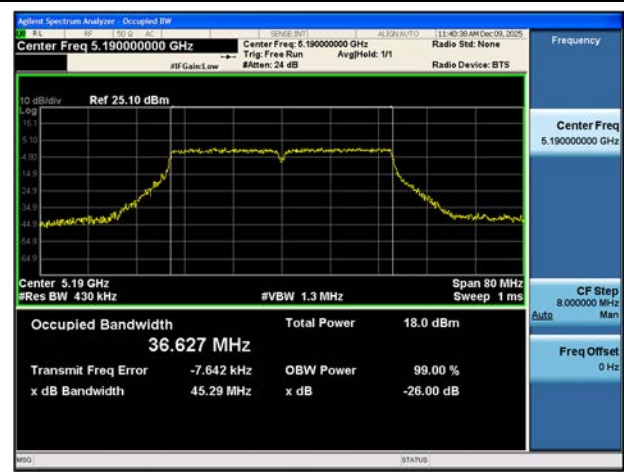

Bandwidth 80M, 802.11ac(VHT80) Ch.155

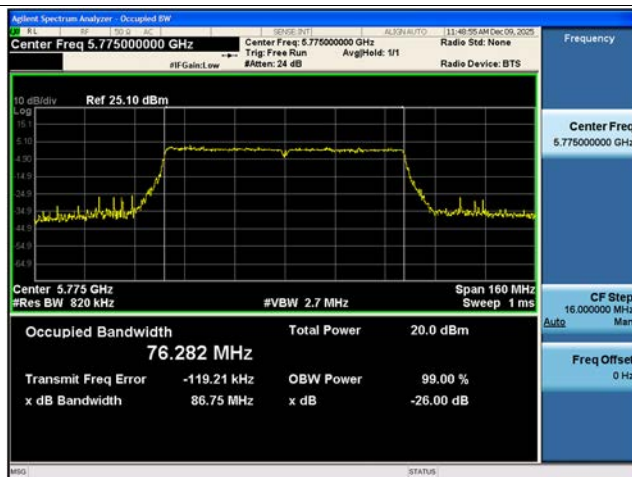


[ANT. 2]


## Test Plots

**Note:** In order to simplify the report, attached plots were only the widest channel per channel bandwidth.

Bandwidth 20M, 802.11n(HT20) Ch.173

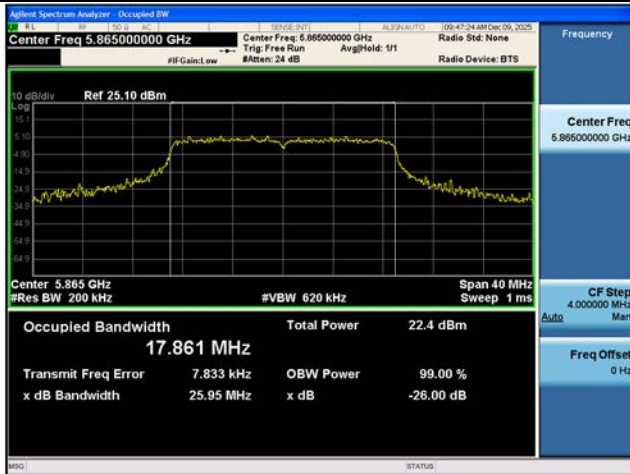

Bandwidth 40M, 802.11n(HT40) Ch.102

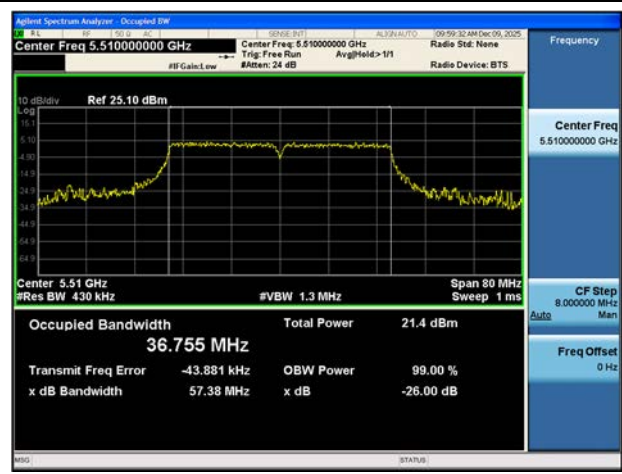

Bandwidth 80M, 802.11ac(VHT80) Ch.138



### 10.3 6 dB BANDWIDTH

[Ant.1]

| Mode : 802.11a         |             |     |                      |             |
|------------------------|-------------|-----|----------------------|-------------|
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5745        | 149 | 16.39                | > 0.5       |
|                        | 5785        | 157 | 16.39                | > 0.5       |
|                        | 5825        | 165 | 16.38                | > 0.5       |
| UNII4                  | 5845        | 169 | 16.38                | > 0.5       |
|                        | 5865        | 173 | 16.38                | > 0.5       |
|                        | 5885        | 177 | 16.38                | > 0.5       |
| Mode : 802.11n(HT20)   |             |     |                      |             |
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5745        | 149 | 17.62                | > 0.5       |
|                        | 5785        | 157 | 17.61                | > 0.5       |
|                        | 5825        | 165 | 17.59                | > 0.5       |
| UNII4                  | 5845        | 169 | 17.60                | > 0.5       |
|                        | 5865        | 173 | 17.60                | > 0.5       |
|                        | 5885        | 177 | 17.59                | > 0.5       |
| Mode : 802.11ac(VHT20) |             |     |                      |             |
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5745        | 149 | 17.61                | > 0.5       |
|                        | 5785        | 157 | 17.61                | > 0.5       |
|                        | 5825        | 165 | 17.61                | > 0.5       |
| UNII4                  | 5845        | 169 | 17.63                | > 0.5       |
|                        | 5865        | 173 | 17.60                | > 0.5       |
|                        | 5885        | 177 | 17.62                | > 0.5       |
| Mode : 802.11n(HT40)   |             |     |                      |             |
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5755        | 151 | 36.44                | > 0.5       |
|                        | 5795        | 159 | 36.45                | > 0.5       |
| UNII4                  | 5835        | 167 | 36.41                | > 0.5       |
|                        | 5875        | 175 | 36.42                | > 0.5       |
| Mode : 802.11ac(VHT40) |             |     |                      |             |
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5755        | 151 | 36.43                | > 0.5       |
|                        | 5795        | 159 | 36.44                | > 0.5       |
| UNII4                  | 5835        | 167 | 36.41                | > 0.5       |
|                        | 5875        | 175 | 36.44                | > 0.5       |
| Mode : 802.11ac(VHT80) |             |     |                      |             |
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5775        | 155 | 76.43                | > 0.5       |
| UNII4                  | 5855        | 171 | 76.39                | > 0.5       |

[Ant.2]

| Mode : 802.11a |             |     |                      |             |
|----------------|-------------|-----|----------------------|-------------|
| BAND           | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3          | 5745        | 149 | 16.36                | > 0.5       |
|                | 5785        | 157 | 16.38                | > 0.5       |
|                | 5825        | 165 | 16.37                | > 0.5       |
| UNII4          | 5845        | 169 | 16.37                | > 0.5       |
|                | 5865        | 173 | 16.37                | > 0.5       |
|                | 5885        | 177 | 16.38                | > 0.5       |

| Mode : 802.11n(HT20) |             |     |                      |             |
|----------------------|-------------|-----|----------------------|-------------|
| BAND                 | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                | 5745        | 149 | 17.57                | > 0.5       |
|                      | 5785        | 157 | 17.36                | > 0.5       |
|                      | 5825        | 165 | 17.58                | > 0.5       |
| UNII4                | 5845        | 169 | 17.60                | > 0.5       |
|                      | 5865        | 173 | 17.59                | > 0.5       |
|                      | 5885        | 177 | 17.38                | > 0.5       |

| Mode : 802.11ac(VHT20) |             |     |                      |             |
|------------------------|-------------|-----|----------------------|-------------|
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5745        | 149 | 17.57                | > 0.5       |
|                        | 5785        | 157 | 17.59                | > 0.5       |
|                        | 5825        | 165 | 17.62                | > 0.5       |
| UNII4                  | 5845        | 169 | 17.57                | > 0.5       |
|                        | 5865        | 173 | 17.59                | > 0.5       |
|                        | 5885        | 177 | 17.59                | > 0.5       |

| Mode : 802.11n(HT40) |             |     |                      |             |
|----------------------|-------------|-----|----------------------|-------------|
| BAND                 | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                | 5755        | 151 | 36.43                | > 0.5       |
|                      | 5795        | 159 | 36.41                | > 0.5       |
| UNII4                | 5835        | 167 | 36.39                | > 0.5       |
|                      | 5875        | 175 | 36.41                | > 0.5       |

| Mode : 802.11ac(VHT40) |             |     |                      |             |
|------------------------|-------------|-----|----------------------|-------------|
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5755        | 151 | 36.42                | > 0.5       |
|                        | 5795        | 159 | 36.43                | > 0.5       |
| UNII4                  | 5835        | 167 | 36.42                | > 0.5       |
|                        | 5875        | 175 | 36.41                | > 0.5       |

| Mode : 802.11ac(VHT80) |             |     |                      |             |
|------------------------|-------------|-----|----------------------|-------------|
| BAND                   | Freq. [MHz] | CH. | 6 dB Bandwidth [MHz] | Limit [MHz] |
| UNII3                  | 5775        | 155 | 76.34                | > 0.5       |
| UNII4                  | 5855        | 171 | 76.32                | > 0.5       |

[ANT. 1]


## Test Plots

Note: In order to simplify the report, attached plots were only the narrowest channel.


Bandwidth 20M, 802.11a Ch.169



Bandwidth 40M, 802.11n(HT40) Ch.167

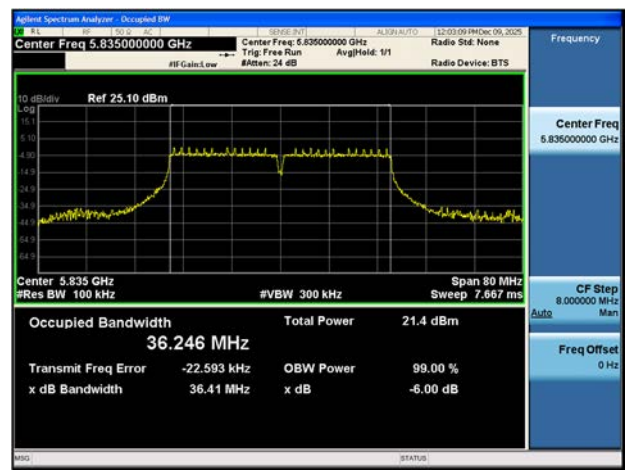


Bandwidth 80M, 802.11ac(VHT80) Ch.171

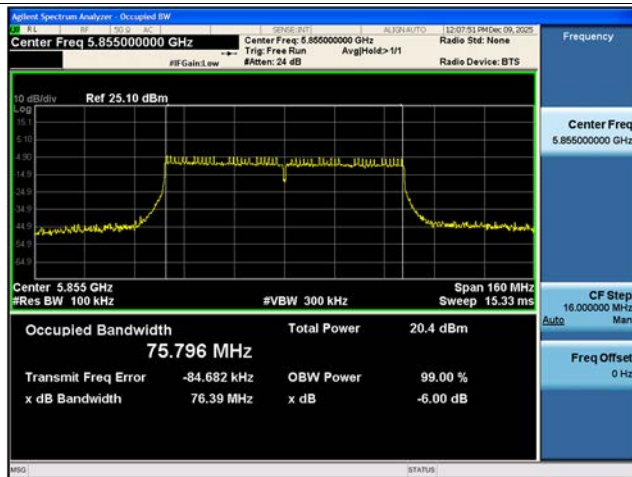


[ANT. 2]

**Note:** In order to simplify the report, attached plots were only the narrowest channel.


Bandwidth 20M, 802.11a Ch.149

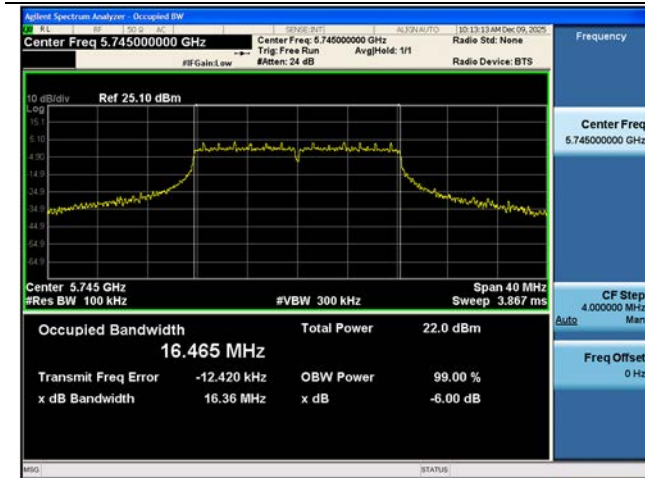

Bandwidth 40M, 802.11n(HT40) Ch.167

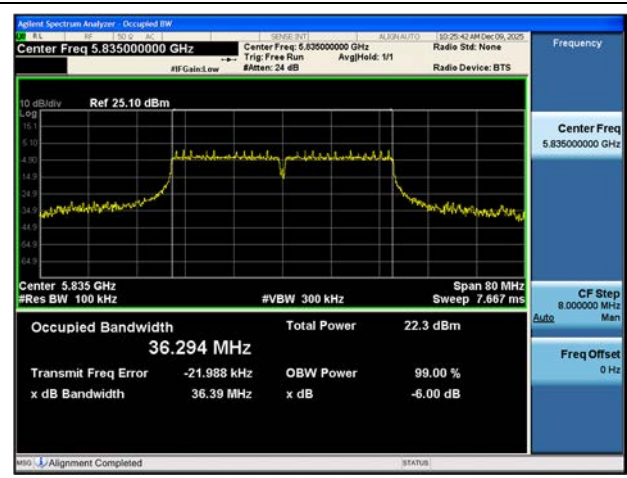

Bandwidth 80M, 802.11ac(VHT80) Ch.171

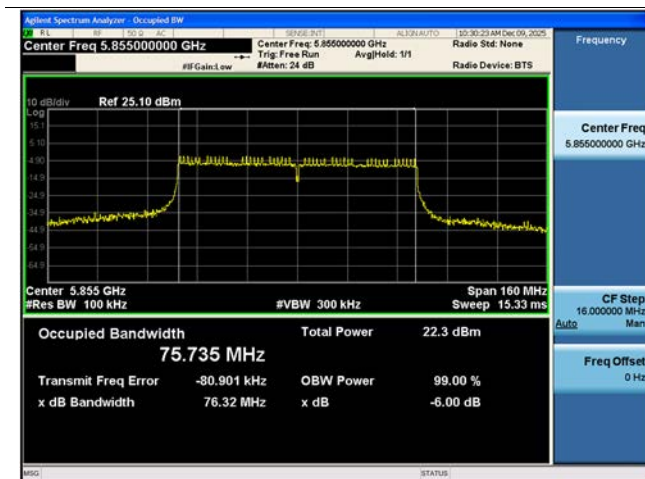

## 10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

### # Limit

(UNII 1) : 23.98 dBm

(UNII 2A, 2C) : 23.98 dBm or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)

(UNII 3) : 30.00 dBm

(UNII 4) : EIRP 30.0 dBm/MHz

(UNII 3&4) : Worst limit 30.00 dBm → UNII 4 Band Antenna Gain Negative

### [SISO(Ant.1)]

# Ant Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

# EIRP = Total Power [dBm] + Antenna Gain [dBi]

| Mode : 802.11a |             |     |                    |                      |                        |                   |                    |            |             |
|----------------|-------------|-----|--------------------|----------------------|------------------------|-------------------|--------------------|------------|-------------|
| Band           | Freq. [MHz] | CH. | Worstcase Datarate | Measured Power [dBm] | Duty cycle Fcator [dB] | Total Power [dBm] | Antenna Gain [dBi] | EIRP [dBm] | Limit [dBm] |
| UNII1          | 5180        | 36  | 6M                 | 14.25                | 0.37                   | 14.62             | -                  | -          | 23.98       |
|                | 5200        | 40  | 6M                 | 15.21                | 0.37                   | 15.58             | -                  | -          | 23.98       |
|                | 5240        | 48  | 6M                 | 14.99                | 0.37                   | 15.36             | -                  | -          | 23.98       |
| UNII2A         | 5260        | 52  | 6M                 | 14.85                | 0.37                   | 15.22             | -                  | -          | 23.98       |
|                | 5300        | 60  | 6M                 | 14.19                | 0.37                   | 14.56             | -                  | -          | 23.98       |
|                | 5320        | 64  | 6M                 | 11.91                | 0.37                   | 12.28             | -                  | -          | 23.98       |
| UNII2C         | 5500        | 100 | 6M                 | 9.25                 | 0.37                   | 9.62              | -                  | -          | 23.98       |
|                | 5600        | 120 | 6M                 | 13.96                | 0.37                   | 14.32             | -                  | -          | 23.98       |
|                | 5720        | 144 | 6M                 | 14.77                | 0.37                   | 15.13             | -                  | -          | 23.98       |
| UNII3          | 5745        | 149 | 6M                 | 14.49                | 0.37                   | 14.86             | -                  | -          | 30.00       |
|                | 5785        | 157 | 6M                 | 12.73                | 0.37                   | 13.10             | -                  | -          | 30.00       |
|                | 5825        | 165 | 6M                 | 13.22                | 0.37                   | 13.58             | -                  | -          | 30.00       |
| UNII4          | 5825        | 169 | 6M                 | 12.78                | 0.37                   | 13.15             | -3.90              | 9.25       | 30 dBm/EIRP |
|                | 5825        | 173 | 6M                 | 12.61                | 0.37                   | 12.98             | -3.90              | 9.08       | 30 dBm/EIRP |
|                | 5825        | 177 | 6M                 | 11.68                | 0.37                   | 12.04             | -3.90              | 8.14       | 30 dBm/EIRP |

| Mode : 802.11n(HT20) |             |     |                    |                      |                        |                   |                    |            |             |
|----------------------|-------------|-----|--------------------|----------------------|------------------------|-------------------|--------------------|------------|-------------|
| Band                 | Freq. [MHz] | CH. | Worstcase Datarate | Measured Power [dBm] | Duty cycle Fcator [dB] | Total Power [dBm] | Antenna Gain [dBi] | EIRP [dBm] | Limit [dBm] |
| UNII1                | 5180        | 36  | MCS0               | 14.48                | 0.34                   | 14.82             | -                  | -          | 23.98       |
|                      | 5200        | 40  | MCS0               | 14.70                | 0.34                   | 15.04             | -                  | -          | 23.98       |
|                      | 5240        | 48  | MCS0               | 14.55                | 0.34                   | 14.89             | -                  | -          | 23.98       |
| UNII2A               | 5260        | 52  | MCS0               | 14.72                | 0.34                   | 15.05             | -                  | -          | 23.98       |
|                      | 5300        | 60  | MCS0               | 14.19                | 0.34                   | 14.53             | -                  | -          | 23.98       |
|                      | 5320        | 64  | MCS0               | 11.99                | 0.34                   | 12.33             | -                  | -          | 23.98       |
| UNII2C               | 5500        | 100 | MCS0               | 9.96                 | 0.34                   | 10.30             | -                  | -          | 23.98       |
|                      | 5600        | 120 | MCS0               | 14.15                | 0.34                   | 14.49             | -                  | -          | 23.98       |
|                      | 5720        | 144 | MCS0               | 14.56                | 0.34                   | 14.89             | -                  | -          | 23.98       |
| UNII3                | 5745        | 149 | MCS0               | 14.24                | 0.34                   | 14.58             | -                  | -          | 30.00       |
|                      | 5785        | 157 | MCS0               | 14.01                | 0.34                   | 14.35             | -                  | -          | 30.00       |
|                      | 5825        | 165 | MCS0               | 14.71                | 0.34                   | 15.04             | -                  | -          | 30.00       |
| UNII4                | 5825        | 169 | MCS0               | 13.88                | 0.34                   | 14.21             | -3.90              | 10.31      | 30 dBm/EIRP |
|                      | 5825        | 173 | MCS0               | 13.66                | 0.34                   | 14.00             | -3.90              | 10.10      | 30 dBm/EIRP |
|                      | 5825        | 177 | MCS0               | 13.12                | 0.34                   | 13.46             | -3.90              | 9.56       | 30 dBm/EIRP |

| Mode : 802.11ac(VHT20) |             |     |                    |                      |                        |                   |                    |            |             |
|------------------------|-------------|-----|--------------------|----------------------|------------------------|-------------------|--------------------|------------|-------------|
| Band                   | Freq. [MHz] | CH. | Worstcase Datarate | Measured Power [dBm] | Duty cycle Fcator [dB] | Total Power [dBm] | Antenna Gain [dBi] | EIRP [dBm] | Limit [dBm] |
| UNII1                  | 5180        | 36  | MCS0               | 14.36                | 0.36                   | 14.73             | -                  | -          | 23.98       |
|                        | 5200        | 40  | MCS0               | 14.93                | 0.36                   | 15.29             | -                  | -          | 23.98       |
|                        | 5240        | 48  | MCS0               | 14.60                | 0.36                   | 14.97             | -                  | -          | 23.98       |
| UNII2A                 | 5260        | 52  | MCS0               | 14.88                | 0.36                   | 15.25             | -                  | -          | 23.98       |
|                        | 5300        | 60  | MCS0               | 14.29                | 0.36                   | 14.65             | -                  | -          | 23.98       |
|                        | 5320        | 64  | MCS0               | 11.94                | 0.36                   | 12.30             | -                  | -          | 23.98       |
| UNII2C                 | 5500        | 100 | MCS0               | 9.70                 | 0.36                   | 10.06             | -                  | -          | 23.98       |
|                        | 5600        | 120 | MCS0               | 14.14                | 0.36                   | 14.51             | -                  | -          | 23.98       |
|                        | 5720        | 144 | MCS0               | 14.46                | 0.36                   | 14.83             | -                  | -          | 23.98       |
| UNII3                  | 5745        | 149 | MCS0               | 14.27                | 0.36                   | 14.64             | -                  | -          | 30.00       |
|                        | 5785        | 157 | MCS0               | 14.08                | 0.36                   | 14.45             | -                  | -          | 30.00       |
|                        | 5825        | 165 | MCS0               | 14.62                | 0.36                   | 14.98             | -                  | -          | 30.00       |
| UNII4                  | 5825        | 169 | MCS0               | 14.09                | 0.36                   | 14.45             | -3.90              | 10.55      | 30 dBm/EIRP |
|                        | 5825        | 173 | MCS0               | 13.61                | 0.36                   | 13.97             | -3.90              | 10.07      | 30 dBm/EIRP |
|                        | 5825        | 177 | MCS0               | 12.87                | 0.36                   | 13.24             | -3.90              | 9.34       | 30 dBm/EIRP |

| Mode : 802.11n(HT40) |             |     |                    |                      |                        |                   |                    |            |             |
|----------------------|-------------|-----|--------------------|----------------------|------------------------|-------------------|--------------------|------------|-------------|
| Band                 | Freq. [MHz] | CH. | Worstcase Datarate | Measured Power [dBm] | Duty cycle Fcator [dB] | Total Power [dBm] | Antenna Gain [dBi] | EIRP [dBm] | Limit [dBm] |
| UNII1                | 5190        | 38  | MCS0               | 10.70                | 0.65                   | 11.35             | -                  | -          | 23.98       |
|                      | 5230        | 46  | MCS0               | 13.58                | 0.65                   | 14.23             | -                  | -          | 23.98       |
| UNII2A               | 5270        | 54  | MCS0               | 13.66                | 0.65                   | 14.31             | -                  | -          | 23.98       |
|                      | 5310        | 62  | MCS0               | 10.07                | 0.65                   | 10.73             | -                  | -          | 23.98       |
| UNII2C               | 5510        | 102 | MCS0               | 11.54                | 0.65                   | 12.19             | -                  | -          | 23.98       |
|                      | 5590        | 118 | MCS0               | 12.95                | 0.65                   | 13.60             | -                  | -          | 23.98       |
|                      | 5710        | 142 | MCS0               | 13.30                | 0.65                   | 13.96             | -                  | -          | 23.98       |
| UNII3                | 5755        | 151 | MCS0               | 12.82                | 0.65                   | 13.48             | -                  | -          | 30.00       |
|                      | 5795        | 159 | MCS0               | 12.50                | 0.65                   | 13.15             | -                  | -          | 30.00       |
| UNII4                | 5755        | 167 | MCS0               | 13.38                | 0.65                   | 14.03             | -3.90              | 10.13      | 30 dBm/EIRP |
|                      | 5795        | 175 | MCS0               | 12.08                | 0.65                   | 12.73             | -3.90              | 8.83       | 30 dBm/EIRP |

| Mode : 802.11ac(VHT40) |             |     |                    |                      |                        |                   |                    |            |             |
|------------------------|-------------|-----|--------------------|----------------------|------------------------|-------------------|--------------------|------------|-------------|
| Band                   | Freq. [MHz] | CH. | Worstcase Datarate | Measured Power [dBm] | Duty cycle Fcator [dB] | Total Power [dBm] | Antenna Gain [dBi] | EIRP [dBm] | Limit [dBm] |
| UNII1                  | 5190        | 38  | MCS0               | 10.71                | 0.75                   | 11.46             | -                  | -          | 23.98       |
|                        | 5230        | 46  | MCS0               | 13.64                | 0.75                   | 14.39             | -                  | -          | 23.98       |
| UNII2A                 | 5270        | 54  | MCS0               | 13.80                | 0.75                   | 14.55             | -                  | -          | 23.98       |
|                        | 5310        | 62  | MCS0               | 10.02                | 0.75                   | 10.77             | -                  | -          | 23.98       |
| UNII2C                 | 5510        | 102 | MCS0               | 11.38                | 0.75                   | 12.13             | -                  | -          | 23.98       |
|                        | 5590        | 118 | MCS0               | 13.16                | 0.75                   | 13.91             | -                  | -          | 23.98       |
|                        | 5710        | 142 | MCS0               | 13.44                | 0.75                   | 14.19             | -                  | -          | 23.98       |
| UNII3                  | 5755        | 151 | MCS0               | 13.05                | 0.75                   | 13.80             | -                  | -          | 30.00       |
|                        | 5795        | 159 | MCS0               | 12.66                | 0.75                   | 13.41             | -                  | -          | 30.00       |
| UNII4                  | 5755        | 167 | MCS0               | 13.23                | 0.75                   | 13.98             | -3.90              | 10.08      | 30 dBm/EIRP |
|                        | 5795        | 175 | MCS0               | 11.91                | 0.75                   | 12.66             | -3.90              | 8.76       | 30 dBm/EIRP |

| Mode : 802.11ac(VHT80) |             |     |                    |                      |                        |                   |                    |            |             |
|------------------------|-------------|-----|--------------------|----------------------|------------------------|-------------------|--------------------|------------|-------------|
| Band                   | Freq. [MHz] | CH. | Worstcase Datarate | Measured Power [dBm] | Duty cycle Fcator [dB] | Total Power [dBm] | Antenna Gain [dBi] | EIRP [dBm] | Limit [dBm] |
| UNII1                  | 5210        | 42  | MCS0               | 10.23                | 1.222                  | 11.45             | -                  | -          | 23.98       |
| UNII2A                 | 5290        | 58  | MCS0               | 9.08                 | 1.222                  | 10.30             | -                  | -          | 23.98       |
| UNII2C                 | 5530        | 106 | MCS0               | 9.76                 | 1.222                  | 10.98             | -                  | -          | 23.98       |
|                        | 5610        | 122 | MCS0               | 11.16                | 1.222                  | 12.38             | -                  | -          | 23.98       |
|                        | 5690        | 138 | MCS0               | 11.79                | 1.222                  | 13.01             | -                  | -          | 23.98       |
| UNII3                  | 5775        | 155 | MCS0               | 11.20                | 1.222                  | 12.43             | -                  | -          | 30.00       |
| UNII4                  | 5775        | 171 | MCS0               | 10.77                | 1.222                  | 11.99             | -3.90              | 8.09       | 30 dBm/EIRP |

### [MIMO (Ant.1+ Ant.2)]

# Ant Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

# MIMO Total Power [dBm] = Ant.1 Total Power [dBm] + Ant.2 Total Power [dBm]

# Max EIRP = MIMO Total Power [dBm] + Directional Gain [dBi]

| Mode : 802.11a |             |     |          |                           |       |       |           |           |                  |       |             |
|----------------|-------------|-----|----------|---------------------------|-------|-------|-----------|-----------|------------------|-------|-------------|
| BAND           | Freq. [MHz] | CH. | Datarate | Total Average Power [dBm] |       |       | Ant1 Gain | Ant2 Gain | Directional Gain | EIRP  | Limit       |
|                |             |     |          | ANT1                      | ANT2  | MIMO  | [dBi]     | [dBi]     | [dBi]            | [dBm] | [dBm]       |
| UNII1          | 5180        | 36  | 6M       | 14.62                     | 15.00 | 17.82 | -         | -         | -                | -     | 23.98       |
|                | 5200        | 40  | 6M       | 15.58                     | 15.16 | 18.39 | -         | -         | -                | -     | 23.98       |
|                | 5240        | 48  | 6M       | 15.36                     | 15.43 | 18.40 | -         | -         | -                | -     | 23.98       |
| UNII2A         | 5260        | 52  | 6M       | 15.22                     | 15.51 | 18.38 | -         | -         | -                | -     | 23.98       |
|                | 5300        | 60  | 6M       | 14.56                     | 14.69 | 17.63 | -         | -         | -                | -     | 23.98       |
|                | 5320        | 64  | 6M       | 12.28                     | 11.92 | 15.11 | -         | -         | -                | -     | 23.98       |
| UNII2C         | 5500        | 100 | 6M       | 9.62                      | 10.48 | 13.08 | -         | -         | -                | -     | 23.98       |
|                | 5600        | 120 | 6M       | 14.32                     | 15.80 | 18.14 | -         | -         | -                | -     | 23.98       |
|                | 5720        | 144 | 6M       | 15.13                     | 15.76 | 18.47 | -         | -         | -                | -     | 23.98       |
| UNII3          | 5745        | 149 | 6M       | 14.86                     | 15.53 | 18.22 | -         | -         | -                | -     | 30.00       |
|                | 5785        | 157 | 6M       | 13.10                     | 15.60 | 17.53 | -         | -         | -                | -     | 30.00       |
|                | 5825        | 165 | 6M       | 13.58                     | 15.87 | 17.88 | -         | -         | -                | -     | 30.00       |
| UNII4          | 5845        | 169 | 6M       | 13.15                     | 15.60 | 17.56 | -3.90     | -3.90     | -0.89            | 16.67 | 30 dBm/EIRP |
|                | 5865        | 173 | 6M       | 12.98                     | 15.63 | 17.51 | -3.90     | -3.90     | -0.89            | 16.62 | 30 dBm/EIRP |
|                | 5885        | 177 | 6M       | 12.04                     | 15.62 | 17.20 | -3.90     | -3.90     | -0.89            | 16.31 | 30 dBm/EIRP |

| Mode : 802.11n(HT20) |             |     |          |                           |       |       |           |           |                  |       |             |
|----------------------|-------------|-----|----------|---------------------------|-------|-------|-----------|-----------|------------------|-------|-------------|
| BAND                 | Freq. [MHz] | CH. | Datarate | Total Average Power [dBm] |       |       | Ant1 Gain | Ant2 Gain | Directional Gain | EIRP  | Limit       |
|                      |             |     |          | ANT1                      | ANT2  | MIMO  | [dBi]     | [dBi]     | [dBi]            | [dBm] | [dBm]       |
| UNII1                | 5180        | 36  | MCS8     | 14.72                     | 14.24 | 17.50 | -         | -         | -                | -     | 23.98       |
|                      | 5200        | 40  | MCS8     | 14.72                     | 14.69 | 17.72 | -         | -         | -                | -     | 23.98       |
|                      | 5240        | 48  | MCS8     | 14.84                     | 14.87 | 17.86 | -         | -         | -                | -     | 23.98       |
| UNII2A               | 5260        | 52  | MCS8     | 14.80                     | 15.05 | 17.94 | -         | -         | -                | -     | 23.98       |
|                      | 5300        | 60  | MCS8     | 14.52                     | 14.24 | 17.39 | -         | -         | -                | -     | 23.98       |
|                      | 5320        | 64  | MCS8     | 12.16                     | 11.72 | 14.96 | -         | -         | -                | -     | 23.98       |
| UNII2C               | 5500        | 100 | MCS8     | 9.54                      | 10.49 | 13.05 | -         | -         | -                | -     | 23.98       |
|                      | 5600        | 120 | MCS8     | 13.85                     | 15.78 | 17.93 | -         | -         | -                | -     | 23.98       |
|                      | 5720        | 144 | MCS8     | 13.74                     | 15.07 | 17.46 | -         | -         | -                | -     | 23.98       |
| UNII3                | 5745        | 149 | MCS8     | 13.29                     | 15.11 | 17.30 | -         | -         | -                | -     | 30.00       |
|                      | 5785        | 157 | MCS8     | 13.70                     | 15.80 | 17.88 | -         | -         | -                | -     | 30.00       |
|                      | 5825        | 165 | MCS8     | 14.87                     | 16.01 | 18.49 | -         | -         | -                | -     | 30.00       |
| UNII4                | 5845        | 169 | MCS8     | 14.40                     | 15.80 | 18.16 | -3.90     | -3.90     | -3.90            | 14.26 | 30 dBm/EIRP |
|                      | 5865        | 173 | MCS8     | 13.67                     | 15.77 | 17.85 | -3.90     | -3.90     | -3.90            | 13.95 | 30 dBm/EIRP |
|                      | 5885        | 177 | MCS8     | 13.00                     | 15.53 | 17.45 | -3.90     | -3.90     | -3.90            | 13.55 | 30 dBm/EIRP |

| Mode : 802.11ac(VHT20) |                |     |          |                              |       |       |              |              |                     |       |             |
|------------------------|----------------|-----|----------|------------------------------|-------|-------|--------------|--------------|---------------------|-------|-------------|
| BAND                   | Freq.<br>[MHz] | CH. | Datarate | Total Average Power<br>[dBm] |       |       | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP  | Limit       |
|                        |                |     |          | ANT1                         | ANT2  | MIMO  | [dBi]        | [dBi]        | [dBi]               | [dBm] | [dBm]       |
| UNII1                  | 5180           | 36  | MCS0     | 14.57                        | 14.39 | 17.49 | -            | -            | -                   | -     | 23.98       |
|                        | 5200           | 40  | MCS0     | 14.75                        | 14.71 | 17.74 | -            | -            | -                   | -     | 23.98       |
|                        | 5240           | 48  | MCS0     | 14.77                        | 14.83 | 17.82 | -            | -            | -                   | -     | 23.98       |
| UNII2A                 | 5260           | 52  | MCS0     | 14.76                        | 15.06 | 17.93 | -            | -            | -                   | -     | 23.98       |
|                        | 5300           | 60  | MCS0     | 14.45                        | 14.16 | 17.32 | -            | -            | -                   | -     | 23.98       |
|                        | 5320           | 64  | MCS0     | 11.98                        | 11.40 | 14.71 | -            | -            | -                   | -     | 23.98       |
| UNII2C                 | 5500           | 100 | MCS0     | 9.50                         | 10.67 | 13.14 | -            | -            | -                   | -     | 23.98       |
|                        | 5600           | 120 | MCS0     | 13.98                        | 15.83 | 18.01 | -            | -            | -                   | -     | 23.98       |
|                        | 5720           | 144 | MCS0     | 13.73                        | 15.20 | 17.54 | -            | -            | -                   | -     | 23.98       |
| UNII3                  | 5745           | 149 | MCS0     | 13.31                        | 15.07 | 17.29 | -            | -            | -                   | -     | 30.00       |
|                        | 5785           | 157 | MCS0     | 13.61                        | 15.65 | 17.76 | -            | -            | -                   | -     | 30.00       |
|                        | 5825           | 165 | MCS0     | 14.52                        | 15.84 | 18.24 | -            | -            | -                   | -     | 30.00       |
| UNII4                  | 5845           | 169 | MCS0     | 13.89                        | 15.91 | 18.03 | -3.90        | -3.90        | -3.90               | 14.13 | 30 dBm/EIRP |
|                        | 5865           | 173 | MCS0     | 13.32                        | 15.68 | 17.67 | -3.90        | -3.90        | -3.90               | 13.77 | 30 dBm/EIRP |
|                        | 5885           | 177 | MCS0     | 12.66                        | 15.86 | 17.56 | -3.90        | -3.90        | -3.90               | 13.66 | 30 dBm/EIRP |

| Mode : 802.11n(HT40) |                |     |          |                              |       |       |              |              |                     |       |             |
|----------------------|----------------|-----|----------|------------------------------|-------|-------|--------------|--------------|---------------------|-------|-------------|
| BAND                 | Freq.<br>[MHz] | CH. | Datarate | Total Average Power<br>[dBm] |       |       | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP  | Limit       |
|                      |                |     |          | ANT1                         | ANT2  | MIMO  | [dBi]        | [dBi]        | [dBi]               | [dBm] | [dBm]       |
| UNII1                | 5190           | 38  | MCS8     | 11.04                        | 11.11 | 14.08 | -            | -            | -                   | -     | 23.98       |
|                      | 5230           | 46  | MCS8     | 13.97                        | 14.00 | 17.00 | -            | -            | -                   | -     | 23.98       |
| UNII2A               | 5270           | 54  | MCS8     | 14.17                        | 14.23 | 17.21 | -            | -            | -                   | -     | 23.98       |
|                      | 5310           | 62  | MCS8     | 10.48                        | 10.11 | 13.31 | -            | -            | -                   | -     | 23.98       |
| UNII2C               | 5510           | 102 | MCS8     | 11.75                        | 12.42 | 15.11 | -            | -            | -                   | -     | 23.98       |
|                      | 5590           | 118 | MCS8     | 13.17                        | 14.51 | 16.90 | -            | -            | -                   | -     | 23.98       |
|                      | 5710           | 142 | MCS8     | 12.91                        | 14.42 | 16.74 | -            | -            | -                   | -     | 23.98       |
| UNII3                | 5755           | 151 | MCS8     | 12.39                        | 14.50 | 16.58 | -            | -            | -                   | -     | 30.00       |
|                      | 5795           | 159 | MCS8     | 12.72                        | 15.18 | 17.13 | -            | -            | -                   | -     | 30.00       |
| UNII4                | 5835           | 167 | MCS8     | 13.50                        | 15.08 | 17.38 | -3.90        | -3.90        | -3.90               | 13.48 | 30 dBm/EIRP |
|                      | 5875           | 175 | MCS8     | 12.20                        | 14.68 | 16.63 | -3.90        | -3.90        | -3.90               | 12.73 | 30 dBm/EIRP |

| Mode : 802.11ac(VHT40) |                |     |          |                              |       |       |              |              |                     |       |             |
|------------------------|----------------|-----|----------|------------------------------|-------|-------|--------------|--------------|---------------------|-------|-------------|
| BAND                   | Freq.<br>[MHz] | CH. | Datarate | Total Average Power<br>[dBm] |       |       | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP  | Limit       |
|                        |                |     |          | ANT1                         | ANT2  | MIMO  | [dBi]        | [dBi]        | [dBi]               | [dBm] | [dBm]       |
| UNII1                  | 5190           | 38  | MCS0     | 10.77                        | 11.07 | 13.94 | -            | -            | -                   | -     | 23.98       |
|                        | 5230           | 46  | MCS0     | 13.69                        | 13.97 | 16.84 | -            | -            | -                   | -     | 23.98       |
| UNII2A                 | 5270           | 54  | MCS0     | 14.02                        | 14.31 | 17.18 | -            | -            | -                   | -     | 23.98       |
|                        | 5310           | 62  | MCS0     | 10.57                        | 10.18 | 13.39 | -            | -            | -                   | -     | 23.98       |
| UNII2C                 | 5510           | 102 | MCS0     | 11.63                        | 12.70 | 15.21 | -            | -            | -                   | -     | 23.98       |
|                        | 5590           | 118 | MCS0     | 13.12                        | 14.51 | 16.88 | -            | -            | -                   | -     | 23.98       |
|                        | 5710           | 142 | MCS0     | 12.97                        | 14.23 | 16.66 | -            | -            | -                   | -     | 23.98       |
| UNII3                  | 5755           | 151 | MCS0     | 12.36                        | 14.09 | 16.32 | -            | -            | -                   | -     | 30.00       |
|                        | 5795           | 159 | MCS0     | 12.71                        | 14.78 | 16.88 | -            | -            | -                   | -     | 30.00       |
| UNII4                  | 5835           | 167 | MCS0     | 13.41                        | 15.09 | 17.34 | -3.90        | -3.90        | -3.90               | 13.44 | 30 dBm/EIRP |
|                        | 5875           | 175 | MCS0     | 12.27                        | 15.17 | 16.96 | -3.90        | -3.90        | -3.90               | 13.06 | 30 dBm/EIRP |

| Mode : 802.11ac(VHT80) |                |     |          |                              |       |       |              |              |                     |       |             |
|------------------------|----------------|-----|----------|------------------------------|-------|-------|--------------|--------------|---------------------|-------|-------------|
| BAND                   | Freq.<br>[MHz] | CH. | Datarate | Total Average Power<br>[dBm] |       |       | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP  | Limit       |
|                        |                |     |          | ANT1                         | ANT2  | MIMO  | [dBi]        | [dBi]        | [dBi]               | [dBm] | [dBm]       |
| UNII1                  | 5210           | 42  | MCS0     | 11.22                        | 10.86 | 14.05 | -            | -            | -                   | -     | 23.98       |
| UNII2A                 | 5290           | 58  | MCS0     | 10.09                        | 9.64  | 12.88 | -            | -            | -                   | -     | 23.98       |
| UNII2C                 | 5530           | 106 | MCS0     | 10.67                        | 10.98 | 13.84 | -            | -            | -                   | -     | 23.98       |
|                        | 5610           | 122 | MCS0     | 12.26                        | 13.98 | 16.22 | -            | -            | -                   | -     | 23.98       |
|                        | 5690           | 138 | MCS0     | 13.08                        | 13.58 | 16.35 | -            | -            | -                   | -     | 23.98       |
| UNII3                  | 5775           | 155 | MCS0     | 12.57                        | 13.63 | 16.14 | -            | -            | -                   | -     | 30.00       |
| UNII4                  | 5855           | 171 | MCS0     | 12.33                        | 14.30 | 16.44 | -3.90        | -3.90        | -3.90               | 12.54 | 30 dBm/EIRP |

## 10.5 POWER SPECTRAL DENSITY

### Note :

1. UNII3 Measured PSD, Total PSD Unit : [dBm/500kHz]

[SISO(Ant.1)]

# Ant Total PSD [dBm/MHz] = Measured PSD [dBm/MHz] + Duty Cycle Factor [dB]

# EIRP = Total PSD [dBm/MHz] + Antenna Gain [dBi]

| Mode : 802.11a |             |     |                    |                                  |                        |                               |                    |                |                 |
|----------------|-------------|-----|--------------------|----------------------------------|------------------------|-------------------------------|--------------------|----------------|-----------------|
| Band           | Freq. [MHz] | CH. | Worstcase Datarate | Measured PSD [dBm/MHz]<br>Note.1 | Duty cycle Fcator [dB] | Total PSD [dBm/MHz]<br>Note.1 | Antenna Gain [dBi] | EIRP [dBm/MHz] | Limit [dBm/MHz] |
| UNII1          | 5180        | 36  | 6M                 | 3.418                            | 0.367                  | 3.785                         | -                  | -              | 11              |
|                | 5200        | 40  | 6M                 | 3.706                            | 0.367                  | 4.073                         | -                  | -              | 11              |
|                | 5240        | 48  | 6M                 | 3.835                            | 0.367                  | 4.202                         | -                  | -              | 11              |
| UNII2A         | 5260        | 52  | 6M                 | 3.700                            | 0.367                  | 4.067                         | -                  | -              | 11              |
|                | 5300        | 60  | 6M                 | 2.965                            | 0.367                  | 3.332                         | -                  | -              | 11              |
|                | 5320        | 64  | 6M                 | 0.771                            | 0.367                  | 1.138                         | -                  | -              | 11              |
| UNII2C         | 5500        | 100 | 6M                 | -2.299                           | 0.367                  | -1.932                        | -                  | -              | 11              |
|                | 5600        | 120 | 6M                 | 2.525                            | 0.367                  | 2.892                         | -                  | -              | 11              |
|                | 5720        | 144 | 6M                 | 3.373                            | 0.367                  | 3.740                         | -                  | -              | 11              |
| UNII3          | 5745        | 149 | 6M                 | 0.393                            | 0.367                  | 0.760                         | -                  | -              | 30 dBm/500kHz   |
|                | 5785        | 157 | 6M                 | -0.132                           | 0.367                  | 0.235                         | -                  | -              | 30 dBm/500kHz   |
|                | 5825        | 165 | 6M                 | -0.001                           | 0.367                  | 0.366                         | -                  | -              | 30 dBm/500kHz   |
| UNII4          | 5845        | 169 | 6M                 | 2.678                            | 0.367                  | 3.045                         | -3.90              | -0.855         | 14 dBm/EIRP     |
|                | 5865        | 173 | 6M                 | 2.087                            | 0.367                  | 2.454                         | -3.90              | -1.446         | 14 dBm/EIRP     |
|                | 5885        | 177 | 6M                 | 1.449                            | 0.367                  | 1.816                         | -3.90              | -2.084         | 14 dBm/EIRP     |

| Mode : 802.11n(HT20) |             |     |                    |                                  |                        |                               |                    |                |                 |
|----------------------|-------------|-----|--------------------|----------------------------------|------------------------|-------------------------------|--------------------|----------------|-----------------|
| Band                 | Freq. [MHz] | CH. | Worstcase Datarate | Measured PSD [dBm/MHz]<br>Note.1 | Duty cycle Fcator [dB] | Total PSD [dBm/MHz]<br>Note.1 | Antenna Gain [dBi] | EIRP [dBm/MHz] | Limit [dBm/MHz] |
| UNII1                | 5180        | 36  | MCS0               | 2.886                            | 0.338                  | 3.224                         | -                  | -              | 11              |
|                      | 5200        | 40  | MCS0               | 3.480                            | 0.338                  | 3.818                         | -                  | -              | 11              |
|                      | 5240        | 48  | MCS0               | 3.323                            | 0.338                  | 3.661                         | -                  | -              | 11              |
| UNII2A               | 5260        | 52  | MCS0               | 3.030                            | 0.338                  | 3.368                         | -                  | -              | 11              |
|                      | 5300        | 60  | MCS0               | 2.807                            | 0.338                  | 3.145                         | -                  | -              | 11              |
|                      | 5320        | 64  | MCS0               | 0.378                            | 0.338                  | 0.716                         | -                  | -              | 11              |
| UNII2C               | 5500        | 100 | MCS0               | -2.416                           | 0.338                  | -2.078                        | -                  | -              | 11              |
|                      | 5600        | 120 | MCS0               | 2.464                            | 0.338                  | 2.802                         | -                  | -              | 11              |
|                      | 5720        | 144 | MCS0               | 3.012                            | 0.338                  | 3.350                         | -                  | -              | 11              |
| UNII3                | 5745        | 149 | MCS0               | 0.031                            | 0.338                  | 0.369                         | -                  | -              | 30 dBm/500kHz   |
|                      | 5785        | 157 | MCS0               | -0.208                           | 0.338                  | 0.130                         | -                  | -              | 30 dBm/500kHz   |
|                      | 5825        | 165 | MCS0               | 0.678                            | 0.338                  | 1.016                         | -                  | -              | 30 dBm/500kHz   |
| UNII4                | 5845        | 169 | MCS0               | 2.896                            | 0.338                  | 3.234                         | -3.90              | -0.666         | 14 dBm/EIRP     |
|                      | 5865        | 173 | MCS0               | 2.000                            | 0.338                  | 2.338                         | -3.90              | -1.562         | 14 dBm/EIRP     |
|                      | 5885        | 177 | MCS0               | 1.662                            | 0.338                  | 2.000                         | -3.90              | -1.900         | 14 dBm/EIRP     |

Mode : 802.11ac(VHT20)

| Band   | Freq.<br>[MHz] | CH. | Worstcase<br>Datarate | Measured<br>PSD<br>[dBm/MHz]<br>Note.1 | Duty<br>cycle<br>Fcator<br>[dB] | Total PSD<br>[dBm/MHz]<br>Note.1 | Antenna<br>Gain<br>[dBi] | EIRP<br>[dBm/MHz] | Limit<br>[dBm/MHz] |
|--------|----------------|-----|-----------------------|----------------------------------------|---------------------------------|----------------------------------|--------------------------|-------------------|--------------------|
| UNII1  | 5180           | 36  | MCS0                  | 2.548                                  | 0.364                           | 2.912                            | -                        | -                 | 11                 |
|        | 5200           | 40  | MCS0                  | 2.963                                  | 0.364                           | 3.327                            | -                        | -                 | 11                 |
|        | 5240           | 48  | MCS0                  | 3.161                                  | 0.364                           | 3.525                            | -                        | -                 | 11                 |
| UNII2A | 5260           | 52  | MCS0                  | 3.446                                  | 0.364                           | 3.810                            | -                        | -                 | 11                 |
|        | 5300           | 60  | MCS0                  | 2.794                                  | 0.364                           | 3.158                            | -                        | -                 | 11                 |
|        | 5320           | 64  | MCS0                  | 0.649                                  | 0.364                           | 1.013                            | -                        | -                 | 11                 |
| UNII2C | 5500           | 100 | MCS0                  | -1.868                                 | 0.364                           | -1.504                           | -                        | -                 | 11                 |
|        | 5600           | 120 | MCS0                  | 2.775                                  | 0.364                           | 3.139                            | -                        | -                 | 11                 |
|        | 5720           | 144 | MCS0                  | 3.221                                  | 0.364                           | 3.585                            | -                        | -                 | 11                 |
| UNII3  | 5745           | 149 | MCS0                  | 0.015                                  | 0.364                           | 0.379                            | -                        | -                 | 30 dBm/500kHz      |
|        | 5785           | 157 | MCS0                  | -0.199                                 | 0.364                           | 0.165                            | -                        | -                 | 30 dBm/500kHz      |
|        | 5825           | 165 | MCS0                  | 0.441                                  | 0.364                           | 0.805                            | -                        | -                 | 30 dBm/500kHz      |
| UNII4  | 5845           | 169 | MCS0                  | 2.590                                  | 0.364                           | 2.954                            | -3.90                    | -0.946            | 14 dBm/EIRP        |
|        | 5865           | 173 | MCS0                  | 2.146                                  | 0.364                           | 2.510                            | -3.90                    | -1.390            | 14 dBm/EIRP        |
|        | 5885           | 177 | MCS0                  | 1.636                                  | 0.364                           | 2.000                            | -3.90                    | -1.900            | 14 dBm/EIRP        |

Mode : 802.11n(HT40)

| Band   | Freq.<br>[MHz] | CH. | Worstcase<br>Datarate | Measured<br>PSD<br>[dBm/MHz]<br>Note.1 | Duty<br>cycle<br>Fcator<br>[dB] | Total PSD<br>[dBm/MHz]<br>Note.1 | Antenna<br>Gain<br>[dBi] | EIRP<br>[dBm/MHz] | Limit<br>[dBm/MHz] |
|--------|----------------|-----|-----------------------|----------------------------------------|---------------------------------|----------------------------------|--------------------------|-------------------|--------------------|
| UNII1  | 5190           | 38  | MCS0                  | -3.650                                 | 0.654                           | -2.996                           | -                        | -                 | 11                 |
|        | 5230           | 46  | MCS0                  | -1.089                                 | 0.654                           | -0.435                           | -                        | -                 | 11                 |
| UNII2A | 5270           | 54  | MCS0                  | -0.614                                 | 0.654                           | 0.040                            | -                        | -                 | 11                 |
|        | 5310           | 62  | MCS0                  | -4.227                                 | 0.654                           | -3.573                           | -                        | -                 | 11                 |
| UNII2C | 5510           | 102 | MCS0                  | -3.522                                 | 0.654                           | -2.868                           | -                        | -                 | 11                 |
|        | 5590           | 118 | MCS0                  | -1.682                                 | 0.654                           | -1.028                           | -                        | -                 | 11                 |
|        | 5710           | 142 | MCS0                  | -1.044                                 | 0.654                           | -0.390                           | -                        | -                 | 11                 |
| UNII3  | 5755           | 151 | MCS0                  | -4.574                                 | 0.654                           | -3.920                           | -                        | -                 | 30 dBm/500kHz      |
|        | 5795           | 159 | MCS0                  | -5.182                                 | 0.654                           | -4.528                           | -                        | -                 | 30 dBm/500kHz      |
| UNII4  | 5835           | 167 | MCS0                  | -1.174                                 | 0.654                           | -0.520                           | -3.90                    | -4.420            | 14 dBm/EIRP        |
|        | 5875           | 175 | MCS0                  | -2.381                                 | 0.654                           | -1.727                           | -3.90                    | -5.627            | 14 dBm/EIRP        |

Mode : 802.11ac(VHT40)

| Band   | Freq.<br>[MHz] | CH. | Worstcase<br>Datarate | Measured<br>PSD<br>[dBm/MHz]<br>Note.1 | Duty<br>cycle<br>Fcator<br>[dB] | Total PSD<br>[dBm/MHz]<br>Note.1 | Antenna<br>Gain<br>[dBi] | EIRP<br>[dBm/MHz] | Limit<br>[dBm/MHz] |
|--------|----------------|-----|-----------------------|----------------------------------------|---------------------------------|----------------------------------|--------------------------|-------------------|--------------------|
| UNII1  | 5190           | 38  | MCS0                  | -4.002                                 | 0.750                           | -3.252                           | -                        | -                 | 11                 |
|        | 5230           | 46  | MCS0                  | -0.788                                 | 0.750                           | -0.038                           | -                        | -                 | 11                 |
| UNII2A | 5270           | 54  | MCS0                  | -0.744                                 | 0.750                           | 0.006                            | -                        | -                 | 11                 |
|        | 5310           | 62  | MCS0                  | -4.719                                 | 0.750                           | -3.969                           | -                        | -                 | 11                 |
| UNII2C | 5510           | 102 | MCS0                  | -3.225                                 | 0.750                           | -2.475                           | -                        | -                 | 11                 |
|        | 5590           | 118 | MCS0                  | -1.433                                 | 0.750                           | -0.683                           | -                        | -                 | 11                 |
|        | 5710           | 142 | MCS0                  | -0.894                                 | 0.750                           | -0.144                           | -                        | -                 | 11                 |
| UNII3  | 5755           | 151 | MCS0                  | -4.376                                 | 0.750                           | -3.626                           | -                        | -                 | 30 dBm/500kHz      |
|        | 5795           | 159 | MCS0                  | -4.745                                 | 0.750                           | -3.995                           | -                        | -                 | 30 dBm/500kHz      |
| UNII4  | 5835           | 167 | MCS0                  | -1.305                                 | 0.750                           | -0.555                           | -3.90                    | -4.455            | 14 dBm/EIRP        |
|        | 5875           | 175 | MCS0                  | -2.525                                 | 0.750                           | -1.775                           | -3.90                    | -5.675            | 14 dBm/EIRP        |

Mode : 802.11ac(VHT80)

| Band   | Freq.<br>[MHz] | CH. | Worstcase<br>Datarate | Measured<br>PSD<br>[dBm/MHz]<br><small>Note.1</small> | Duty<br>cycle<br>Fcator<br>[dB] | Total PSD<br>[dBm/MHz]<br><small>Note.1</small> | Antenna<br>Gain<br>[dBi] | EIRP<br>[dBm/MHz] | Limit<br>[dBm/MHz] |
|--------|----------------|-----|-----------------------|-------------------------------------------------------|---------------------------------|-------------------------------------------------|--------------------------|-------------------|--------------------|
| UNII1  | 5210           | 42  | MCS0                  | -6.296                                                | 1.222                           | -5.074                                          | -                        | -                 | 11                 |
| UNII2A | 5290           | 58  | MCS0                  | -8.433                                                | 1.222                           | -7.211                                          | -                        | -                 | 11                 |
| UNII2C | 5530           | 106 | MCS0                  | -7.174                                                | 1.222                           | -5.952                                          | -                        | -                 | 11                 |
|        | 5610           | 122 | MCS0                  | -5.559                                                | 1.222                           | -4.337                                          | -                        | -                 | 11                 |
|        | 5690           | 138 | MCS0                  | -5.210                                                | 1.222                           | -3.988                                          | -                        | -                 | 11                 |
| UNII3  | 5775           | 155 | MCS0                  | -8.532                                                | 1.222                           | -7.310                                          | -                        | -                 | 30 dBm/500kHz      |
| UNII4  | 5855           | 171 | MCS0                  | -5.721                                                | 1.222                           | -4.499                                          | -3.90                    | -8.399            | 14 dBm/EIRP        |

### [MIMO (Ant.1+ Ant.2)]

# Ant Total PSD [dBm/MHz] = Measured PSD [dBm/MHz] + Duty Cycle Factor [dB]

# MIMO Total PSD [dBm/MHz] = Ant.1 Total PSD [dBm/MHz] + Ant.2 Total PSD [dBm/MHz]

# EIRP = MIMO Total PSD [dBm/MHz] + Directional Gain [dBi]

#### Mode : 802.11a

| BAND   | Freq.<br>[MHz] | CH. | Datarate | Total PSD<br>[dBm/MHz]<br>Note.1 |        |       | Ant1<br>Gain<br>[dBi] | Ant2<br>Gain<br>[dBi] | Directional<br>Gain<br>[dBi] | EIRP<br>[dBm/MHz] | Limit<br>[dBm/MHz] |
|--------|----------------|-----|----------|----------------------------------|--------|-------|-----------------------|-----------------------|------------------------------|-------------------|--------------------|
|        |                |     |          | ANT1                             | ANT2   | MIMO  |                       |                       |                              |                   |                    |
| UNII1  | 5180           | 36  | 6M       | 3.785                            | 3.697  | 6.752 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5200           | 40  | 6M       | 4.073                            | 3.973  | 7.034 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5240           | 48  | 6M       | 4.202                            | 4.308  | 7.266 | -                     | -                     | -                            | -                 | 11.00              |
| UNII2A | 5260           | 52  | 6M       | 4.067                            | 4.622  | 7.364 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5300           | 60  | 6M       | 3.332                            | 3.772  | 6.568 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5320           | 64  | 6M       | 1.138                            | 0.821  | 3.993 | -                     | -                     | -                            | -                 | 11.00              |
| UNII2C | 5500           | 100 | 6M       | -1.932                           | -0.386 | 1.920 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5600           | 120 | 6M       | 2.892                            | 4.701  | 6.901 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5720           | 144 | 6M       | 3.740                            | 4.692  | 7.253 | -                     | -                     | -                            | -                 | 11.00              |
| UNII3  | 5745           | 149 | 6M       | 0.760                            | 1.688  | 4.259 | -                     | -                     | -                            | -                 | 30 dBm/500kHz      |
|        | 5785           | 157 | 6M       | 0.235                            | 2.062  | 4.254 | -                     | -                     | -                            | -                 | 30 dBm/500kHz      |
|        | 5825           | 165 | 6M       | 0.366                            | 2.328  | 4.467 | -                     | -                     | -                            | -                 | 30 dBm/500kHz      |
| UNII4  | 5845           | 169 | 6M       | 3.045                            | 5.008  | 7.147 | -3.90                 | -3.90                 | -0.89                        | 6.257             | 14 dBm/EIRP        |
|        | 5865           | 173 | 6M       | 2.454                            | 4.830  | 6.813 | -3.90                 | -3.90                 | -0.89                        | 5.923             | 14 dBm/EIRP        |
|        | 5885           | 177 | 6M       | 1.816                            | 4.537  | 6.397 | -3.90                 | -3.90                 | -0.89                        | 5.507             | 14 dBm/EIRP        |

#### Mode : 802.11n(HT20)

| BAND   | Freq.<br>[MHz] | CH. | Datarate | Total PSD<br>[dBm/MHz]<br>Note.1 |        |       | Ant1<br>Gain<br>[dBi] | Ant2<br>Gain<br>[dBi] | Directional<br>Gain<br>[dBi] | EIRP<br>[dBm/MHz] | Limit<br>[dBm/MHz] |
|--------|----------------|-----|----------|----------------------------------|--------|-------|-----------------------|-----------------------|------------------------------|-------------------|--------------------|
|        |                |     |          | ANT1                             | ANT2   | MIMO  |                       |                       |                              |                   |                    |
| UNII1  | 5180           | 36  | MCS8     | 2.872                            | 2.743  | 5.818 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5200           | 40  | MCS8     | 3.437                            | 3.076  | 6.271 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5240           | 48  | MCS8     | 3.361                            | 3.269  | 6.326 | -                     | -                     | -                            | -                 | 11.00              |
| UNII2A | 5260           | 52  | MCS8     | 3.453                            | 3.425  | 6.449 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5300           | 60  | MCS8     | 2.880                            | 2.859  | 5.880 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5320           | 64  | MCS8     | 0.501                            | -0.064 | 3.238 | -                     | -                     | -                            | -                 | 11.00              |
| UNII2C | 5500           | 100 | MCS8     | -2.247                           | -0.647 | 1.637 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5600           | 120 | MCS8     | 1.911                            | 3.738  | 5.930 | -                     | -                     | -                            | -                 | 11.00              |
|        | 5720           | 144 | MCS8     | 2.739                            | 3.397  | 6.091 | -                     | -                     | -                            | -                 | 11.00              |
| UNII3  | 5745           | 149 | MCS8     | -0.183                           | 0.574  | 3.222 | -                     | -                     | -                            | -                 | 30 dBm/500kHz      |
|        | 5785           | 157 | MCS8     | -0.863                           | 1.481  | 3.476 | -                     | -                     | -                            | -                 | 30 dBm/500kHz      |
|        | 5825           | 165 | MCS8     | 0.197                            | 1.723  | 4.037 | -                     | -                     | -                            | -                 | 30 dBm/500kHz      |
| UNII4  | 5845           | 169 | MCS8     | 2.364                            | 4.417  | 6.521 | -3.90                 | -3.90                 | -3.90                        | 2.621             | 14 dBm/EIRP        |
|        | 5865           | 173 | MCS8     | 2.081                            | 4.084  | 6.207 | -3.90                 | -3.90                 | -3.90                        | 2.307             | 14 dBm/EIRP        |
|        | 5885           | 177 | MCS8     | 0.838                            | 3.823  | 5.592 | -3.90                 | -3.90                 | -3.90                        | 1.692             | 14 dBm/EIRP        |

Mode : 802.11ac(VHT20)

| BAND   | Freq.<br>[MHz] | CH. | Datarate | Total PSD<br>[dBm/MHz]<br><small>Note.11</small> |        |       | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP  | Limit         |
|--------|----------------|-----|----------|--------------------------------------------------|--------|-------|--------------|--------------|---------------------|-------|---------------|
|        |                |     |          | ANT1                                             | ANT2   | MIMO  |              |              |                     |       |               |
| UNII1  | 5180           | 36  | MCS0     | 2.697                                            | 2.763  | 5.740 | -            | -            | -                   | -     | 11.00         |
|        | 5200           | 40  | MCS0     | 3.098                                            | 3.173  | 6.146 | -            | -            | -                   | -     | 11.00         |
|        | 5240           | 48  | MCS0     | 3.248                                            | 3.152  | 6.210 | -            | -            | -                   | -     | 11.00         |
| UNII2A | 5260           | 52  | MCS0     | 3.327                                            | 3.569  | 6.460 | -            | -            | -                   | -     | 11.00         |
|        | 5300           | 60  | MCS0     | 2.591                                            | 2.594  | 5.602 | -            | -            | -                   | -     | 11.00         |
|        | 5320           | 64  | MCS0     | 0.378                                            | -0.069 | 3.170 | -            | -            | -                   | -     | 11.00         |
| UNII2C | 5500           | 100 | MCS0     | -2.054                                           | -1.448 | 1.270 | -            | -            | -                   | -     | 11.00         |
|        | 5600           | 120 | MCS0     | 1.991                                            | 4.032  | 6.140 | -            | -            | -                   | -     | 11.00         |
|        | 5720           | 144 | MCS0     | 2.564                                            | 3.246  | 5.928 | -            | -            | -                   | -     | 11.00         |
| UNII3  | 5745           | 149 | MCS0     | -0.267                                           | 0.395  | 3.087 | -            | -            | -                   | -     | 30 dBm/500kHz |
|        | 5785           | 157 | MCS0     | -0.939                                           | 1.439  | 3.421 | -            | -            | -                   | -     | 30 dBm/500kHz |
|        | 5825           | 165 | MCS0     | 0.369                                            | 1.479  | 3.969 | -            | -            | -                   | -     | 30 dBm/500kHz |
| UNII4  | 5845           | 169 | MCS0     | 2.240                                            | 4.425  | 6.478 | -3.90        | -3.90        | -3.90               | 2.578 | 14 dBm/EIRP   |
|        | 5865           | 173 | MCS0     | 1.824                                            | 4.027  | 6.074 | -3.90        | -3.90        | -3.90               | 2.174 | 14 dBm/EIRP   |
|        | 5885           | 177 | MCS0     | 0.560                                            | 3.624  | 5.367 | -3.90        | -3.90        | -3.90               | 1.467 | 14 dBm/EIRP   |

Mode : 802.11n(HT40)

| BAND   | Freq.<br>[MHz] | CH. | Datarate | Total PSD<br>[dBm/MHz]<br><small>Note.1</small> |        |        | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP   | Limit         |
|--------|----------------|-----|----------|-------------------------------------------------|--------|--------|--------------|--------------|---------------------|--------|---------------|
|        |                |     |          | ANT1                                            | ANT2   | MIMO   |              |              |                     |        |               |
| UNII1  | 5190           | 38  | MCS8     | -3.104                                          | -3.885 | -0.466 | -            | -            | -                   | -      | 11.00         |
|        | 5230           | 46  | MCS8     | -0.543                                          | -0.934 | 2.276  | -            | -            | -                   | -      | 11.00         |
| UNII2A | 5270           | 54  | MCS8     | 0.111                                           | -0.129 | 3.003  | -            | -            | -                   | -      | 11.00         |
|        | 5310           | 62  | MCS8     | -3.783                                          | -3.906 | -0.833 | -            | -            | -                   | -      | 11.00         |
| UNII2C | 5510           | 102 | MCS8     | -2.752                                          | -1.773 | 0.776  | -            | -            | -                   | -      | 11.00         |
|        | 5590           | 118 | MCS8     | -1.108                                          | 0.237  | 2.627  | -            | -            | -                   | -      | 11.00         |
|        | 5710           | 142 | MCS8     | -0.685                                          | 0.106  | 2.739  | -            | -            | -                   | -      | 11.00         |
| UNII3  | 5755           | 151 | MCS8     | -4.288                                          | -2.294 | -0.167 | -            | -            | -                   | -      | 30 dBm/500kHz |
|        | 5795           | 159 | MCS8     | -4.745                                          | -2.437 | -0.429 | -            | -            | -                   | -      | 30 dBm/500kHz |
| UNII4  | 5835           | 167 | MCS8     | -1.160                                          | 0.614  | 2.828  | -3.90        | -3.90        | -3.90               | -1.072 | 14 dBm/EIRP   |
|        | 5875           | 175 | MCS8     | -1.783                                          | 0.170  | 2.313  | -3.90        | -3.90        | -3.90               | -1.587 | 14 dBm/EIRP   |

## Mode : 802.11ac(VHT40)

| BAND   | Freq.<br>[MHz] | CH. | Datarate | Total PSD<br>[dBm/MHz]<br>Note.1 |        |        | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP   | Limit         |
|--------|----------------|-----|----------|----------------------------------|--------|--------|--------------|--------------|---------------------|--------|---------------|
|        |                |     |          | ANT1                             | ANT2   | MIMO   |              |              |                     |        |               |
| UNII1  | 5190           | 38  | MCS0     | -2.860                           | -3.607 | -0.207 | -            | -            | -                   | -      | 11.00         |
|        | 5230           | 46  | MCS0     | -0.040                           | -0.039 | 2.971  | -            | -            | -                   | -      | 11.00         |
| UNII2A | 5270           | 54  | MCS0     | -0.125                           | -0.182 | 2.857  | -            | -            | -                   | -      | 11.00         |
|        | 5310           | 62  | MCS0     | -3.804                           | -4.538 | -1.145 | -            | -            | -                   | -      | 11.00         |
| UNII2C | 5510           | 102 | MCS0     | -3.009                           | -1.530 | 0.804  | -            | -            | -                   | -      | 11.00         |
|        | 5590           | 118 | MCS0     | -1.074                           | 0.095  | 2.560  | -            | -            | -                   | -      | 11.00         |
|        | 5710           | 142 | MCS0     | -0.670                           | -0.022 | 2.677  | -            | -            | -                   | -      | 11.00         |
| UNII3  | 5755           | 151 | MCS0     | -4.130                           | -2.777 | -0.391 | -            | -            | -                   | -      | 30 dBm/500kHz |
|        | 5795           | 159 | MCS0     | -4.473                           | -2.242 | -0.205 | -            | -            | -                   | -      | 30 dBm/500kHz |
| UNII4  | 5835           | 167 | MCS0     | -1.108                           | 0.510  | 2.786  | -3.90        | -3.90        | -3.90               | -1.114 | 14 dBm/EIRP   |
|        | 5875           | 175 | MCS0     | -2.048                           | 0.590  | 2.479  | -3.90        | -3.90        | -3.90               | -1.421 | 14 dBm/EIRP   |

## Mode : 802.11ac(VHT80)

| BAND   | Freq.<br>[MHz] | CH. | Datarate | Total PSD<br>[dBm/MHz]<br>Note.1 |        |        | Ant1<br>Gain | Ant2<br>Gain | Directional<br>Gain | EIRP   | Limit         |
|--------|----------------|-----|----------|----------------------------------|--------|--------|--------------|--------------|---------------------|--------|---------------|
|        |                |     |          | ANT1                             | ANT2   | MIMO   |              |              |                     |        |               |
| UNII1  | 5210           | 42  | MCS0     | -5.467                           | -6.049 | -2.738 | -            | -            | -                   | -      | 11.00         |
| UNII2A | 5290           | 58  | MCS0     | -6.682                           | -6.809 | -3.735 | -            | -            | -                   | -      | 11.00         |
| UNII2C | 5530           | 106 | MCS0     | -6.408                           | -5.141 | -2.718 | -            | -            | -                   | -      | 11.00         |
|        | 5610           | 122 | MCS0     | -5.183                           | -2.859 | -0.857 | -            | -            | -                   | -      | 11.00         |
|        | 5690           | 138 | MCS0     | -3.636                           | -3.336 | -0.473 | -            | -            | -                   | -      | 11.00         |
| UNII3  | 5775           | 155 | MCS0     | -7.948                           | -6.270 | -4.018 | -            | -            | -                   | -      | 30 dBm/500kHz |
| UNII4  | 5855           | 171 | MCS0     | -6.485                           | -3.049 | -1.425 | -3.90        | -3.90        | -3.90               | -5.325 | 14 dBm/EIRP   |

[MIMO (Ant.1+ Ant.2)]


☐ Test Plots

Note: In order to simplify the report, attached plots were only channel of the highest PSD.


ANT. 1

ANT. 2


Bandwidth 20M, 802.11a(Ch. 52)

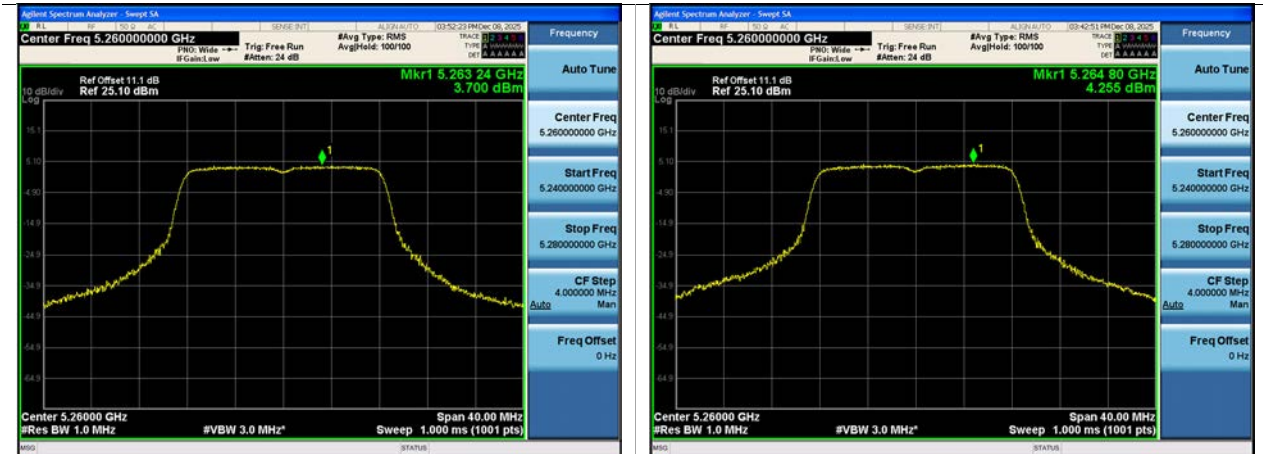

Bandwidth 40M, 802.11n(HT40) (Ch. 54)

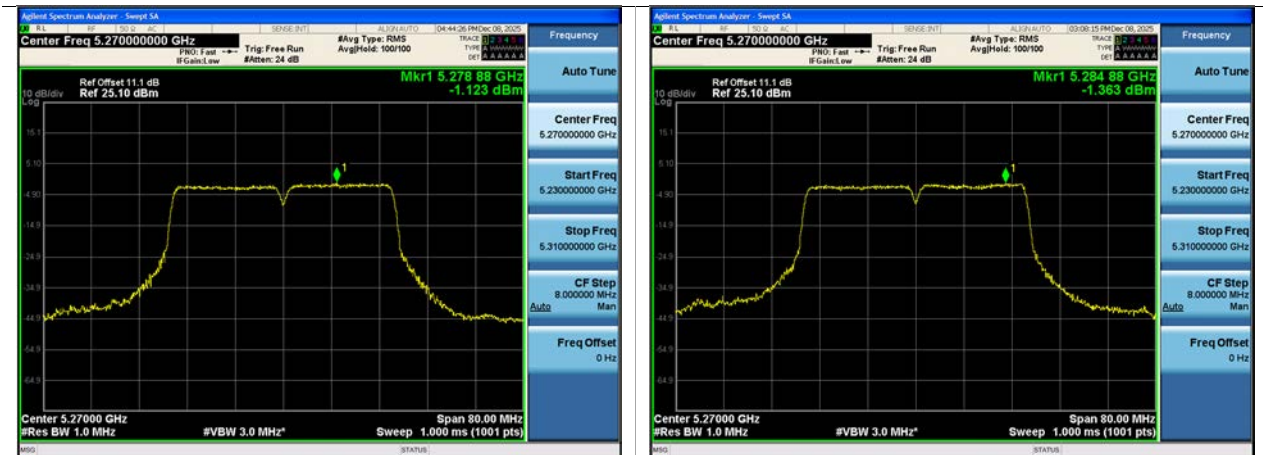

Bandwidth 80M, 802.11ac(VHT80) (Ch. 138)

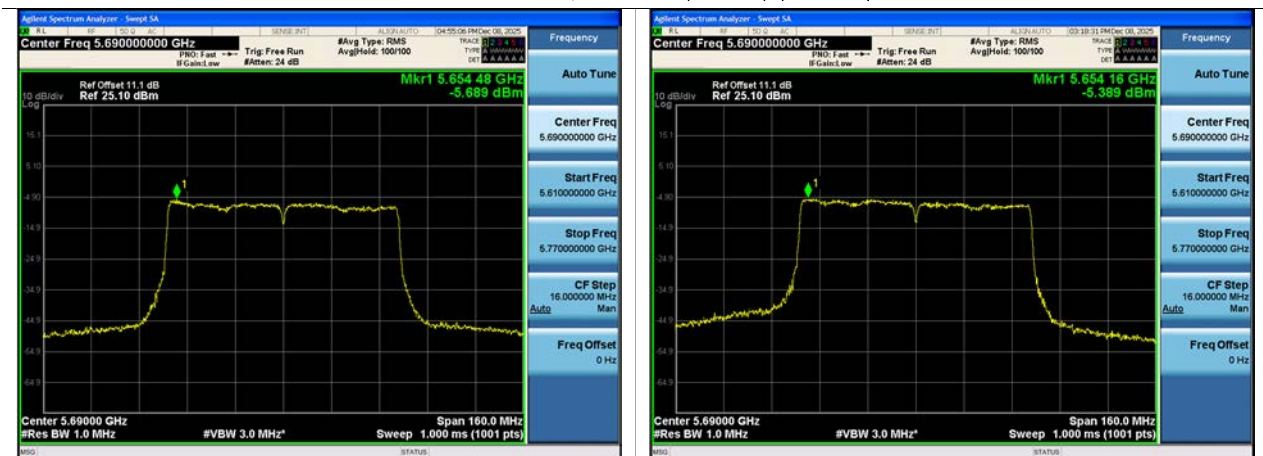

## 10.6 FREQUENCY STABILITY

**Note:**

1. All modes of operation were investigated and the worst case configuration results are reported.
2. Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## 10.6.1 802.11ac 80 MHz BW

[MIMO (Ant1+Ant2)]

REFERENCE VOLTAGE: 3.90 VDC

Startup after the EUT is energized

| OPERATING BAND:      |       |       | UNII Band 1      |                 | UNII Band 2A     |                 | UNII Band 2C      |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,210,000,000 Hz |                 | 5,290,000,000 Hz |                 | 5, 530,000,000 Hz |                 |
| CHANNEL:             |       |       | 42               |                 | 58               |                 | 106               |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error | Frequency         | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           | (kHz)             | (kHz)           |
| 100%                 | 3.90  | +20   | 5210035.46       | 35.46           | 5290035.42       | 35.42           | 5530031.44        | 31.44           |
| 100%                 |       | -30   | 5210007.29       | 7.29            | 5290005.87       | 5.87            | 5530007.51        | 7.51            |
| 100%                 |       | -20   | 5210012.50       | 12.50           | 5290015.54       | 15.54           | 5530012.98        | 12.98           |
| 100%                 |       | -10   | 5210017.05       | 17.05           | 5290020.06       | 20.06           | 5530019.69        | 19.69           |
| 100%                 |       | 0     | 5210020.78       | 20.78           | 5290022.47       | 22.47           | 5530024.12        | 24.12           |
| 100%                 |       | +10   | 5210029.32       | 29.32           | 5290030.83       | 30.83           | 5530026.13        | 26.13           |
| 100%                 |       | +30   | 5210040.30       | 40.30           | 5290038.60       | 38.60           | 5530037.61        | 37.61           |
| 100%                 |       | +40   | 5210041.12       | 41.12           | 5290041.42       | 41.42           | 5530046.34        | 46.34           |
| 100%                 |       | +50   | 5210050.46       | 50.46           | 5290051.04       | 51.04           | 5530051.40        | 51.40           |
| High                 | 4.50  | +20   | 5210033.80       | 33.80           | 5290034.87       | 34.87           | 5530035.56        | 35.56           |
| End Point            | 3.40  | +20   | 5210031.15       | 31.15           | 5290030.40       | 30.40           | 5530034.93        | 34.93           |

| OPERATING BAND:      |       |       | UNII Band 3      |                 | UNII Band 4      |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,775,000,000 Hz |                 | 5,855,000,000 Hz |                 |
| CHANNEL:             |       |       | 155              |                 | 171              |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           |
| 100%                 | 3.90  | +20   | 5775031.18       | 31.18           | 5855034.97       | 34.97           |
| 100%                 |       | -30   | 5775010.48       | 10.48           | 5855007.40       | 7.40            |
| 100%                 |       | -20   | 5775014.69       | 14.69           | 5855011.59       | 11.59           |
| 100%                 |       | -10   | 5775019.74       | 19.74           | 5855019.61       | 19.61           |
| 100%                 |       | 0     | 5775020.50       | 20.50           | 5855020.11       | 20.11           |
| 100%                 |       | +10   | 5775027.06       | 27.06           | 5855028.65       | 28.65           |
| 100%                 |       | +30   | 5775038.63       | 38.63           | 5855036.96       | 36.96           |
| 100%                 |       | +40   | 5775048.56       | 48.56           | 5855047.45       | 47.45           |
| 100%                 |       | +50   | 5775051.28       | 51.28           | 5855056.79       | 56.79           |
| High                 | 4.50  | +20   | 5775033.61       | 33.61           | 5855031.28       | 31.28           |
| End Point            | 3.40  | +20   | 5775031.60       | 31.60           | 5855030.96       | 30.96           |

2 minutes after the EUT is energized

| OPERATING BAND:      |       |       | UNII Band 1      |                 | UNII Band 2A     |                 | UNII Band 2C     |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,210,000,000 Hz |                 | 5,290,000,000 Hz |                 | 5,530,000,000 Hz |                 |
| CHANNEL:             |       |       | 42               |                 | 58               |                 | 106              |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error | Frequency        | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           | (kHz)            | (kHz)           |
| 100%                 | 3.90  | +20   | 5210032.62       | 32.62           | 5290034.54       | 34.54           | 5530032.97       | 32.97           |
| 100%                 |       | -30   | 5210005.77       | 5.77            | 5290005.85       | 5.85            | 5530006.21       | 6.21            |
| 100%                 |       | -20   | 5210011.41       | 11.41           | 5290011.33       | 11.33           | 5530010.60       | 10.60           |
| 100%                 |       | -10   | 5210020.49       | 20.49           | 5290015.58       | 15.58           | 5530019.68       | 19.68           |
| 100%                 |       | 0     | 5210021.36       | 21.36           | 5290024.76       | 24.76           | 5530023.31       | 23.31           |
| 100%                 |       | +10   | 5210030.44       | 30.44           | 5290025.81       | 25.81           | 5530029.55       | 29.55           |
| 100%                 |       | +30   | 5210036.56       | 36.56           | 5290035.82       | 35.82           | 5530036.22       | 36.22           |
| 100%                 |       | +40   | 5210049.32       | 49.32           | 5290050.09       | 50.09           | 5530045.85       | 45.85           |
| 100%                 |       | +50   | 5210054.70       | 54.70           | 5290057.59       | 57.59           | 5530058.06       | 58.06           |
| High                 | 4.50  | +20   | 5210032.45       | 32.45           | 5290032.11       | 32.11           | 5530031.02       | 31.02           |
| End Point            | 3.40  | +20   | 5210033.47       | 33.47           | 5290031.68       | 31.68           | 5530033.65       | 33.65           |

| OPERATING BAND:      |       |       | UNII Band 3      |                 | UNII Band 4      |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,775,000,000 Hz |                 | 5,855,000,000 Hz |                 |
| CHANNEL:             |       |       | 155              |                 | 171              |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           |
| 100%                 | 3.90  | +20   | 5775030.31       | 30.31           | 5855034.28       | 34.28           |
| 100%                 |       | -30   | 5775010.91       | 10.91           | 5855006.65       | 6.65            |
| 100%                 |       | -20   | 5775012.14       | 12.14           | 5855010.30       | 10.30           |
| 100%                 |       | -10   | 5775018.38       | 18.38           | 5855020.88       | 20.88           |
| 100%                 |       | 0     | 5775025.33       | 25.33           | 5855025.78       | 25.78           |
| 100%                 |       | +10   | 5775029.31       | 29.31           | 5855025.34       | 25.34           |
| 100%                 |       | +30   | 5775039.98       | 39.98           | 5855038.78       | 38.78           |
| 100%                 |       | +40   | 5775042.26       | 42.26           | 5855047.26       | 47.26           |
| 100%                 |       | +50   | 5775055.98       | 55.98           | 5855060.24       | 60.24           |
| High                 | 4.50  | +20   | 5775034.08       | 34.08           | 5855031.08       | 31.08           |
| End Point            | 3.40  | +20   | 5775033.65       | 33.65           | 5855032.41       | 32.41           |

5 minutes after the EUT is energized

| OPERATING BAND:      |       |       | UNII Band 1      |                 | UNII Band 2A     |                 | UNII Band 2C      |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,210,000,000 Hz |                 | 5,290,000,000 Hz |                 | 5, 530,000,000 Hz |                 |
| CHANNEL:             |       |       | 42               |                 | 58               |                 | 106               |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error | Frequency         | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           | (kHz)             | (kHz)           |
| 100%                 | 3.90  | +20   | 5210034.62       | 34.62           | 5290031.70       | 31.70           | 5530032.61        | 32.61           |
| 100%                 |       | -30   | 5210005.05       | 5.05            | 5290009.36       | 9.36            | 5530010.78        | 10.78           |
| 100%                 |       | -20   | 5210015.46       | 15.46           | 5290011.91       | 11.91           | 5530010.64        | 10.64           |
| 100%                 |       | -10   | 5210018.94       | 18.94           | 5290018.31       | 18.31           | 5530020.99        | 20.99           |
| 100%                 |       | 0     | 5210025.57       | 25.57           | 5290020.20       | 20.20           | 5530023.24        | 23.24           |
| 100%                 |       | +10   | 5210030.20       | 30.20           | 5290025.03       | 25.03           | 5530028.86        | 28.86           |
| 100%                 |       | +30   | 5210039.97       | 39.97           | 5290040.31       | 40.31           | 5530040.22        | 40.22           |
| 100%                 |       | +40   | 5210046.46       | 46.46           | 5290045.72       | 45.72           | 5530047.96        | 47.96           |
| 100%                 |       | +50   | 5210055.39       | 55.39           | 5290058.78       | 58.78           | 5530060.13        | 60.13           |
| High                 | 4.50  | +20   | 5210032.52       | 32.52           | 5290030.98       | 30.98           | 5530034.54        | 34.54           |
| End Point            | 3.40  | +20   | 5210032.72       | 32.72           | 5290034.30       | 34.30           | 5530030.86        | 30.86           |

| OPERATING BAND:      |       |       | UNII Band 3      |                 | UNII Band 4      |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,775,000,000 Hz |                 | 5,855,000,000 Hz |                 |
| CHANNEL:             |       |       | 155              |                 | 171              |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           |
| 100%                 | 3.90  | +20   | 5775033.13       | 33.13           | 5855034.40       | 34.40           |
| 100%                 |       | -30   | 5775007.26       | 7.26            | 5855007.60       | 7.60            |
| 100%                 |       | -20   | 5775014.69       | 14.69           | 5855012.08       | 12.08           |
| 100%                 |       | -10   | 5775019.62       | 19.62           | 5855017.12       | 17.12           |
| 100%                 |       | 0     | 5775020.24       | 20.24           | 5855021.21       | 21.21           |
| 100%                 |       | +10   | 5775026.76       | 26.76           | 5855030.02       | 30.02           |
| 100%                 |       | +30   | 5775039.68       | 39.68           | 5855039.20       | 39.20           |
| 100%                 |       | +40   | 5775043.23       | 43.23           | 5855045.22       | 45.22           |
| 100%                 |       | +50   | 5775059.71       | 59.71           | 5855059.11       | 59.11           |
| High                 | 4.50  | +20   | 5775035.49       | 35.49           | 5855034.27       | 34.27           |
| End Point            | 3.40  | +20   | 5775033.81       | 33.81           | 5855031.58       | 31.58           |

10 minutes after the EUT is energized

| OPERATING BAND:      |       |       | UNII Band 1      |                 | UNII Band 2A     |                 | UNII Band 2C     |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,210,000,000 Hz |                 | 5,290,000,000 Hz |                 | 5,530,000,000 Hz |                 |
| CHANNEL:             |       |       | 42               |                 | 58               |                 | 106              |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error | Frequency        | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           | (kHz)            | (kHz)           |
| 100%                 | 3.90  | +20   | 5210031.97       | 31.97           | 5290034.38       | 34.38           | 5530035.83       | 35.83           |
| 100%                 |       | -30   | 5210005.40       | 5.40            | 5290008.06       | 8.06            | 5530009.68       | 9.68            |
| 100%                 |       | -20   | 5210012.74       | 12.74           | 5290012.99       | 12.99           | 5530012.99       | 12.99           |
| 100%                 |       | -10   | 5210018.04       | 18.04           | 5290019.71       | 19.71           | 5530017.93       | 17.93           |
| 100%                 |       | 0     | 5210020.35       | 20.35           | 5290024.96       | 24.96           | 5530024.13       | 24.13           |
| 100%                 |       | +10   | 5210027.98       | 27.98           | 5290025.38       | 25.38           | 5530026.21       | 26.21           |
| 100%                 |       | +30   | 5210038.34       | 38.34           | 5290036.05       | 36.05           | 5530039.20       | 39.20           |
| 100%                 |       | +40   | 5210045.82       | 45.82           | 5290044.10       | 44.10           | 5530045.59       | 45.59           |
| 100%                 |       | +50   | 5210056.25       | 56.25           | 5290056.42       | 56.42           | 5530051.15       | 51.15           |
| High                 | 4.50  | +20   | 5210035.24       | 35.24           | 5290034.62       | 34.62           | 5530033.42       | 33.42           |
| End Point            | 3.40  | +20   | 5210033.03       | 33.03           | 5290031.88       | 31.88           | 5530031.77       | 31.77           |

| OPERATING BAND:      |       |       | UNII Band 3      |                 | UNII Band 4      |                 |
|----------------------|-------|-------|------------------|-----------------|------------------|-----------------|
| OPERATING FREQUENCY: |       |       | 5,775,000,000 Hz |                 | 5,855,000,000 Hz |                 |
| CHANNEL:             |       |       | 155              |                 | 171              |                 |
| Voltage              | Power | Temp. | Frequency        | Frequency Error | Frequency        | Frequency Error |
| (%)                  | (VDC) | (°C)  | (kHz)            | (kHz)           | (kHz)            | (kHz)           |
| 100%                 | 3.90  | +20   | 5775035.81       | 35.81           | 5855031.99       | 31.99           |
| 100%                 |       | -30   | 5775008.83       | 8.83            | 5855008.28       | 8.28            |
| 100%                 |       | -20   | 5775012.12       | 12.12           | 5855012.41       | 12.41           |
| 100%                 |       | -10   | 5775017.53       | 17.53           | 5855016.69       | 16.69           |
| 100%                 |       | 0     | 5775022.57       | 22.57           | 5855024.21       | 24.21           |
| 100%                 |       | +10   | 5775025.66       | 25.66           | 5855027.19       | 27.19           |
| 100%                 |       | +30   | 5775039.02       | 39.02           | 5855039.34       | 39.34           |
| 100%                 |       | +40   | 5775048.94       | 48.94           | 5855043.29       | 43.29           |
| 100%                 |       | +50   | 5775052.42       | 52.42           | 5855060.61       | 60.61           |
| High                 | 4.50  | +20   | 5775033.14       | 33.14           | 5855033.23       | 33.23           |
| End Point            | 3.40  | +20   | 5775031.71       | 31.71           | 5855030.97       | 30.97           |

## 10.7 STRADDLE CHANNEL

| Test Description       | Note                                                                                                                                                                                                                                                                    |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 26 dB Bandwidth        | <ol style="list-style-type: none"> <li>[UNII 2C] 26 dB Bandwidth = 5725 MHz - Measured Frequency[MHz]</li> <li>[UNII 3] 26 dB Bandwidth = Measured Frequency[MHz] - 5725 MHz</li> </ol>                                                                                 |
| 6 dB Bandwidth         | <ol style="list-style-type: none"> <li>6 dB Bandwidth = Measured Frequency[MHz] – 5725 MHz</li> <li>Limit : &gt; 0.5 MHz</li> </ol>                                                                                                                                     |
| Output Power           | <ol style="list-style-type: none"> <li>Limit(UNII2C) : 23.98 dBm or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)</li> <li>Limit(UNII 3) : 30.00 dBm</li> <li>Total Power (dBm) = Measured Value (dBm) + Duty Cycle Factor (dB)</li> </ol> |
| Power Spectral Density | <ol style="list-style-type: none"> <li>Limit(UNII 2C) : 11.0 dBm/MHz</li> <li>Limit(UNII 3) : 30.0 dBm/500kHz</li> <li>Total PSD (dBm/MHz) = Measured Value (dBm/MHz) + Duty Cycle Factor (dB)</li> </ol>                                                               |

## [SISO(Ant.1)]

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11a         | UNII2C | 5720           | 144 | 15.92            | -               | 13.56                   | 3.372              |
| 802.11n(HT20)   |        |                |     | 16.16            | -               | 13.72                   | 2.998              |
| 802.11ac(VHT20) |        |                |     | 16.24            | -               | 13.62                   | 3.240              |
| 802.11a         | UNII3  | 5720           | 144 | 5.44             | 3.20            | 7.29                    | 0.266              |
| 802.11n(HT20)   |        |                |     | 6.36             | 3.84            | 7.93                    | 0.186              |
| 802.11ac(VHT20) |        |                |     | 5.96             | 3.84            | 7.78                    | 0.243              |

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11n(HT40)   | UNII2C | 5710           | 142 | 36.68            | -               | 13.58                   | -0.354             |
| 802.11ac(VHT40) |        |                |     | 37.72            | -               | 13.63                   | -0.414             |
| 802.11n(HT40)   | UNII3  | 5710           | 142 | 6.28             | 3.24            | 3.33                    | -3.802             |
| 802.11ac(VHT40) |        |                |     | 7.16             | 3.24            | 3.43                    | -3.810             |

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11ac(VHT80) | UNII2C | 5690           | 138 | 77.88            | -               | 13.00                   | -4.136             |
| 802.11ac(VHT80) | UNII3  | 5690           | 138 | 8.04             | 3.24            | -0.97                   | -7.890             |

## [MIMO (Ant.1)]

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11a         | UNII2C | 5720           | 144 | 15.68            | -               | 12.85                   | 2.951              |
| 802.11n(HT20)   |        |                |     | 16.00            | -               | 12.56                   | 2.265              |
| 802.11ac(VHT20) |        |                |     | 16.00            | -               | 12.62                   | 2.255              |
| 802.11a         | UNII3  | 5720           | 144 | 5.60             | 3.20            | 6.78                    | -0.201             |
| 802.11n(HT20)   |        |                |     | 6.12             | 3.60            | 6.84                    | -0.958             |
| 802.11ac(VHT20) |        |                |     | 6.24             | 3.60            | 6.78                    | -0.942             |

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11n(HT40)   | UNII2C | 5710           | 142 | 37.32            | -               | 12.71                   | -1.199             |
| 802.11ac(VHT40) |        |                |     | 37.16            | -               | 12.92                   | -1.195             |
| 802.11n(HT40)   | UNII3  | 5710           | 142 | 6.92             | 3.24            | 2.46                    | -4.567             |
| 802.11ac(VHT40) |        |                |     | 6.68             | 3.24            | 2.68                    | -4.229             |

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11ac(VHT80) | UNII2C | 5690           | 138 | 77.40            | -               | 12.34                   | -4.897             |
| 802.11ac(VHT80) | UNII3  | 5690           | 138 | 7.88             | 3.24            | -1.52                   | -8.540             |

## [MIMO (Ant.2)]

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11a         | UNII2C | 5720           | 144 | 15.52            | -               | 13.73                   | 3.643              |
| 802.11n(HT20)   |        |                |     | 16.28            | -               | 13.88                   | 3.453              |
| 802.11ac(VHT20) |        |                |     | 16.52            | -               | 13.76                   | 3.301              |
| 802.11a         | UNII3  | 5720           | 144 | 6.00             | 3.24            | 7.22                    | 0.189              |
| 802.11n(HT20)   |        |                |     | 6.24             | 3.80            | 8.02                    | 0.101              |
| 802.11ac(VHT20) |        |                |     | 5.96             | 3.80            | 7.65                    | 0.165              |

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11n(HT40)   | UNII2C | 5710           | 142 | 36.60            | -               | 13.60                   | -0.272             |
| 802.11ac(VHT40) |        |                |     | 37.32            | -               | 13.61                   | -0.313             |
| 802.11n(HT40)   | UNII3  | 5710           | 142 | 6.84             | 3.24            | 3.24                    | -4.150             |
| 802.11ac(VHT40) |        |                |     | 7.08             | 3.24            | 3.16                    | -4.072             |

| Mode            | Band   | Freq.<br>[MHz] | CH. | 26dB BW<br>[MHz] | 6dB BW<br>[MHz] | Total<br>Power<br>[dBm] | Total PSD<br>[dBm] |
|-----------------|--------|----------------|-----|------------------|-----------------|-------------------------|--------------------|
| 802.11ac(VHT80) | UNII2C | 5690           | 138 | 78.20            | -               | 13.24                   | -3.453             |
| 802.11ac(VHT80) | UNII3  | 5690           | 138 | 7.08             | 3.24            | -1.34                   | -7.851             |

☐ Test Plots (26 dB Bandwidth)  
[SISO(Ant.1)]

802.11a UNII Band



802.11n(HT20) UNII Band




802.11ac(VHT20) UNII Band




802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band

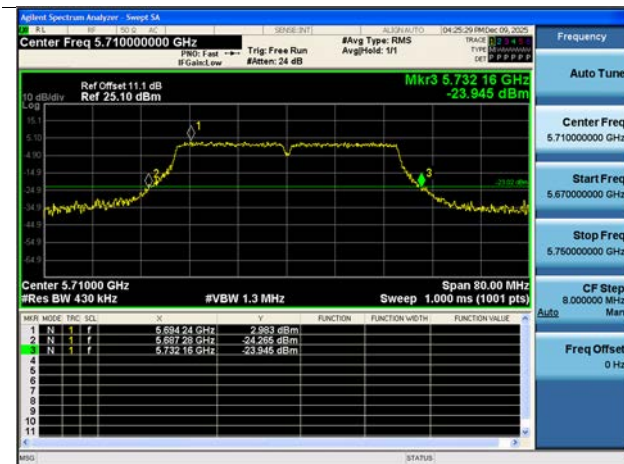

802.11ac(VHT80) UNII Band

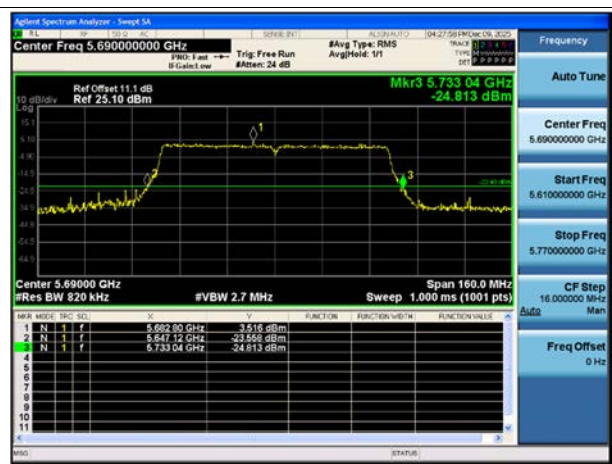

[MIMO (Ant.1)]


802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band

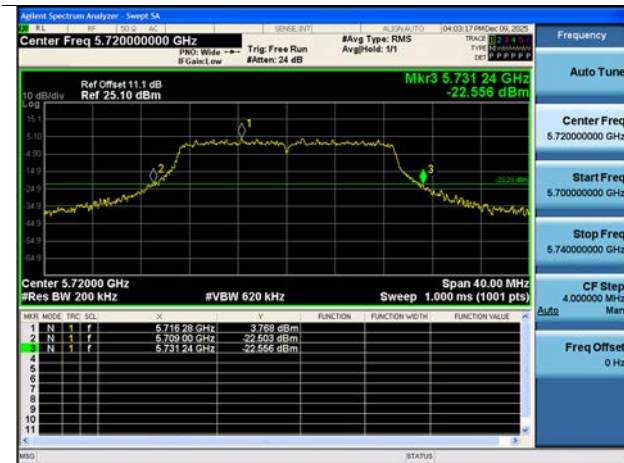


802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band



802.11ac(VHT80) UNII Band

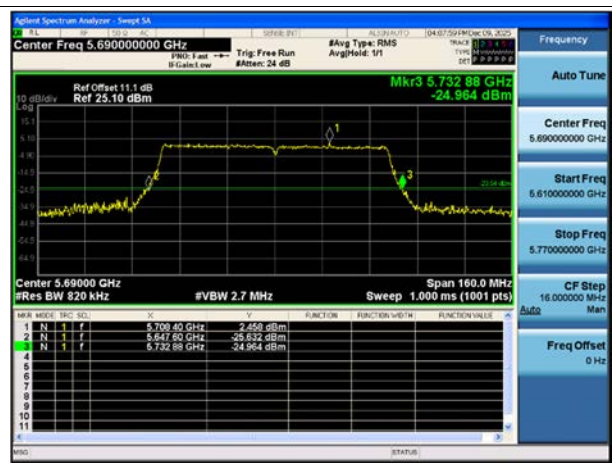

[MIMO (Ant.2)]

802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band




802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band




802.11ac(VHT80) UNII Band

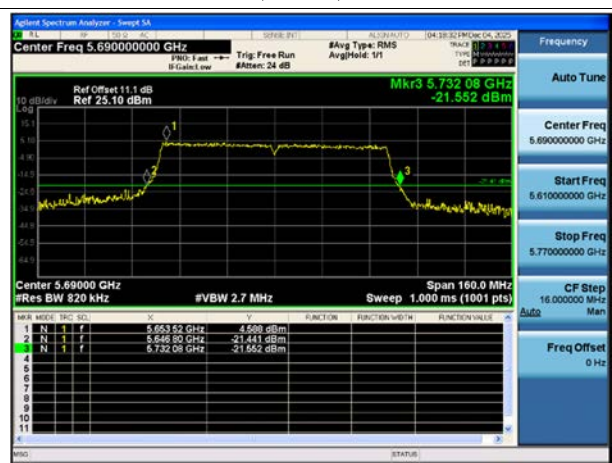


□ Test Plots(UNII 3 Band 6 dB Bandwidth)  
[SISO(Ant.1)]


802.11a UNII Band

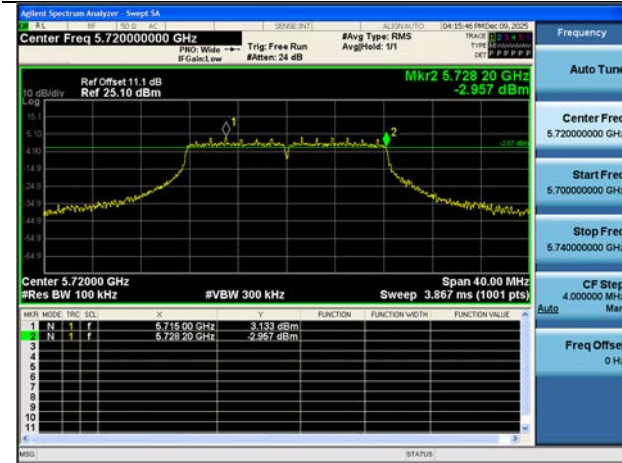


802.11n(HT20) UNII Band

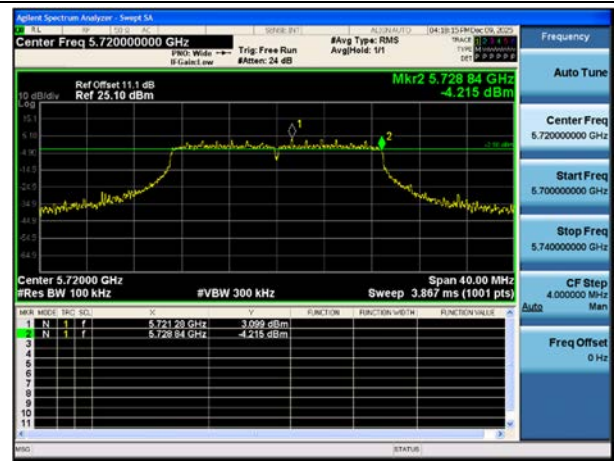


802.11ac(VHT20) UNII Band

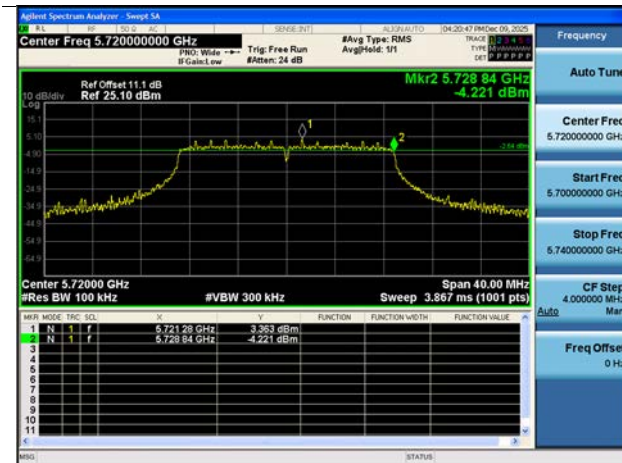


802.11n(HT40) UNII Band

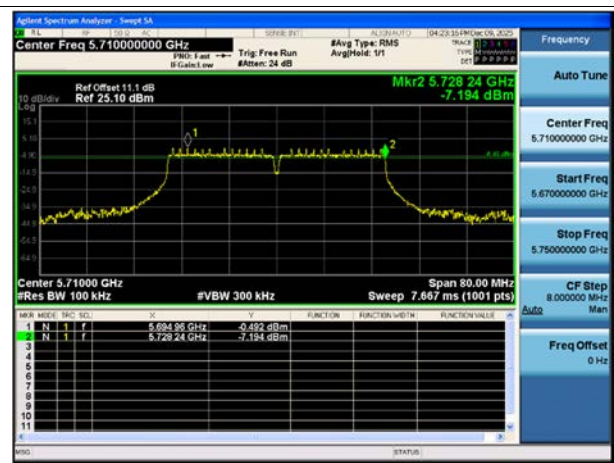

802.11ac(VHT40) UNII Band

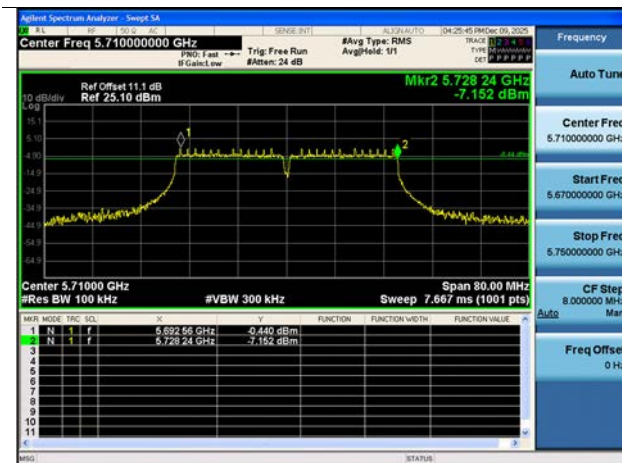


802.11ac(VHT80) UNII Band

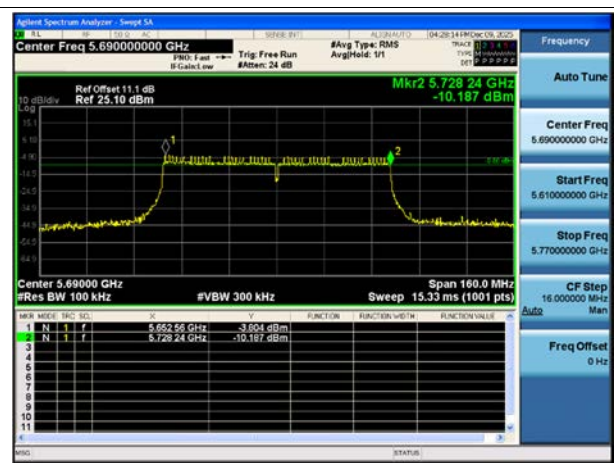


[MIMO (Ant.1)]


802.11a UNII Band

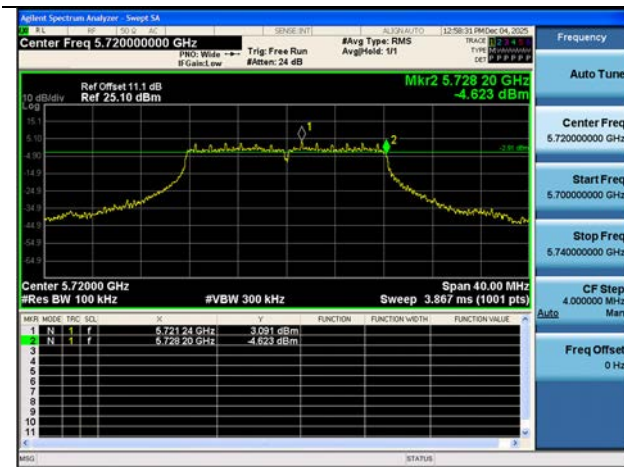


802.11n(HT20) UNII Band

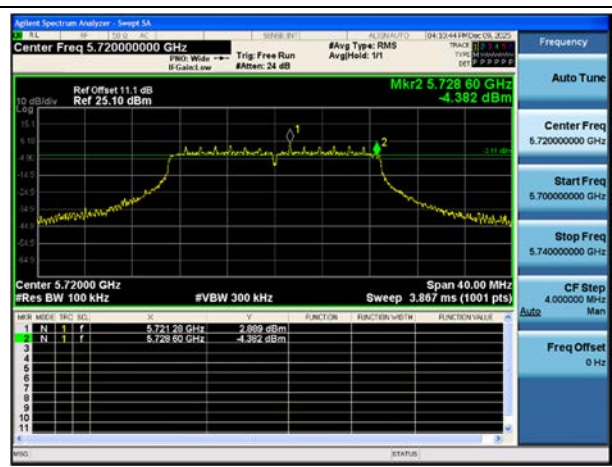


802.11ac(VHT20) UNII Band

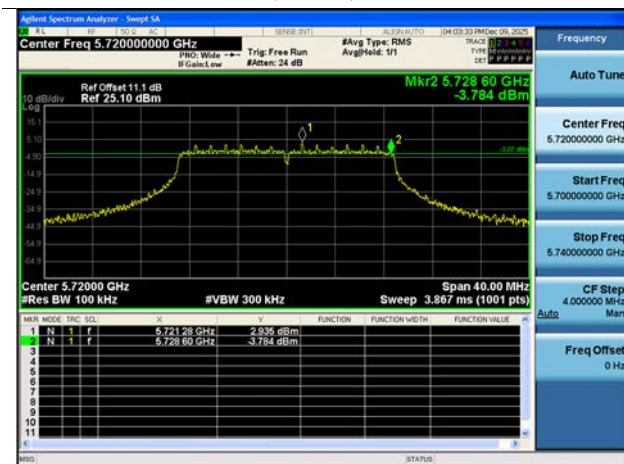


802.11n(HT40) UNII Band

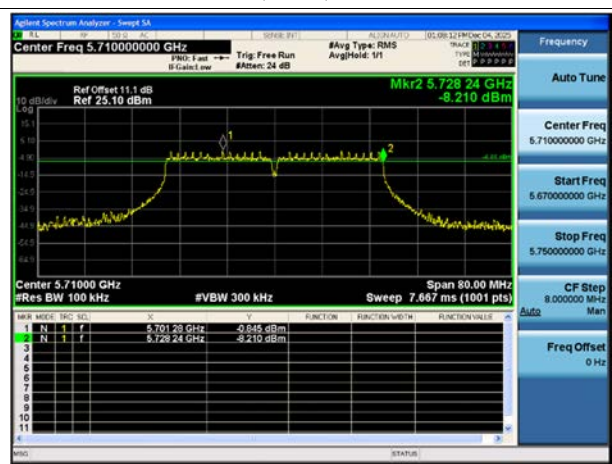

802.11ac(VHT40) UNII Band

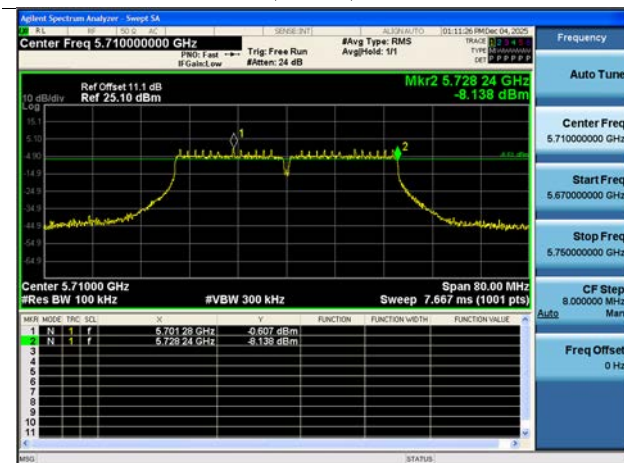


802.11ac(VHT80) UNII Band

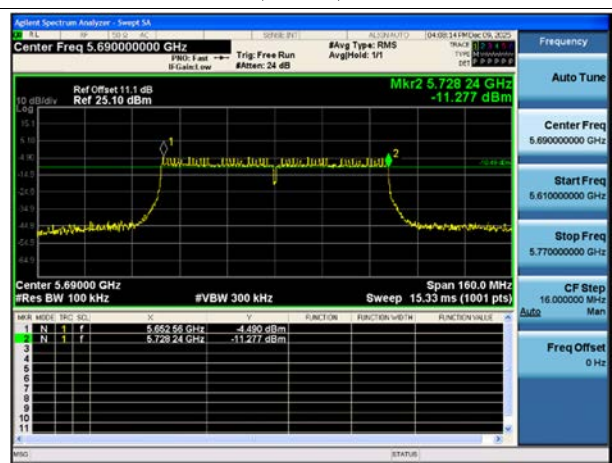

[MIMO (Ant.2)]

802.11a UNII Band

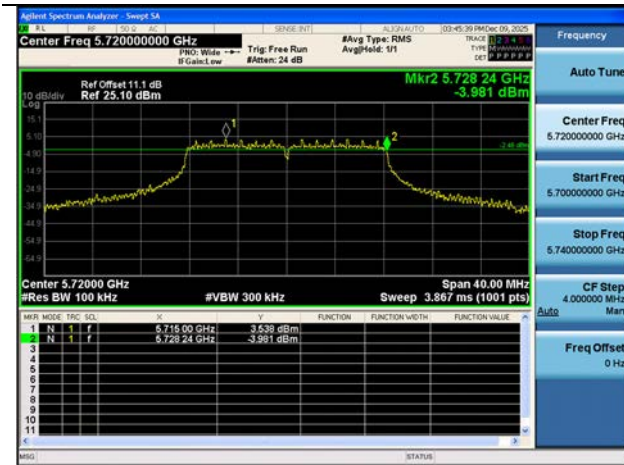


802.11n(HT20) UNII Band




802.11ac(VHT20) UNII Band




802.11n(HT40) UNII Band

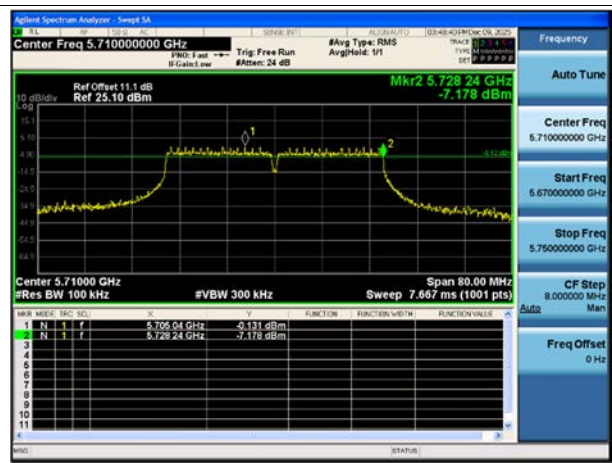

802.11ac(VHT40) UNII Band

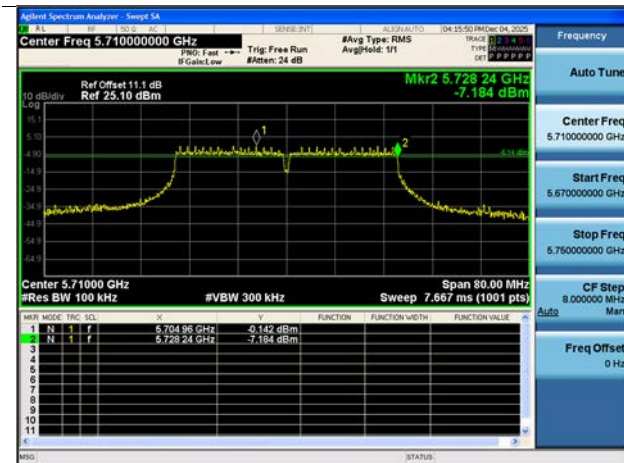


802.11ac(VHT80) UNII Band

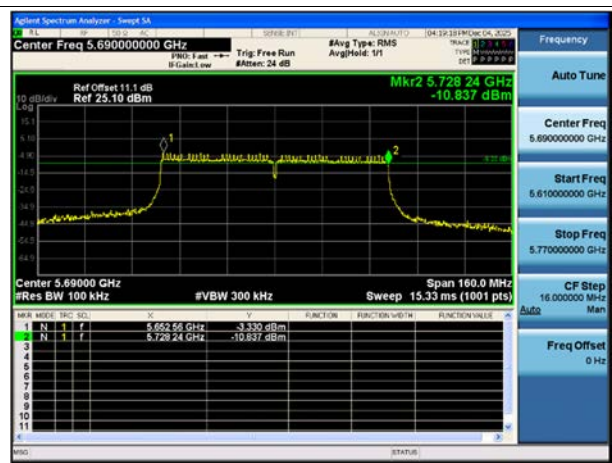


Test Plots(Output Power)  
[SISO(Ant.1)]


802.11a UNII 2C Band

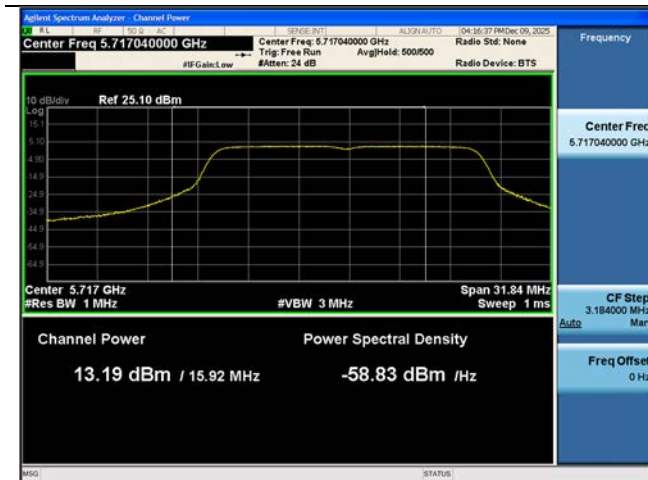


802.11a UNII 3 Band

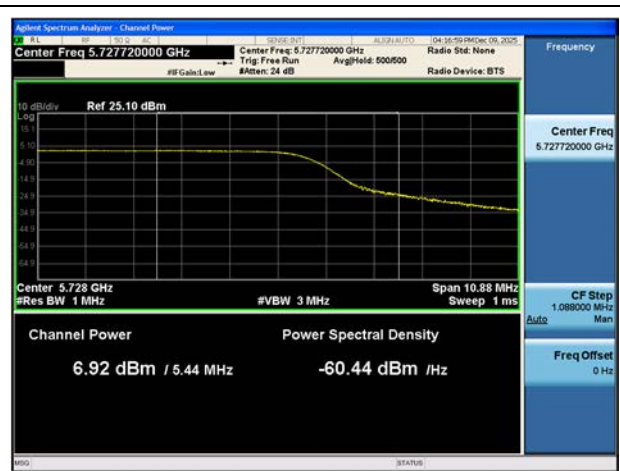

802.11n(HT20) UNII 2C Band

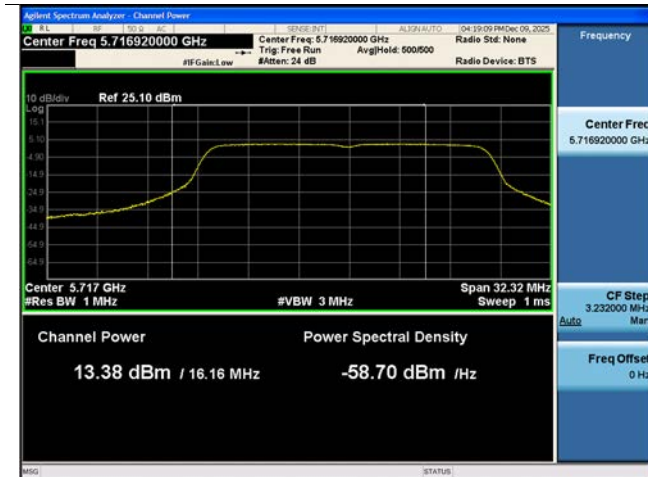


802.11n(HT20) UNII 3 Band

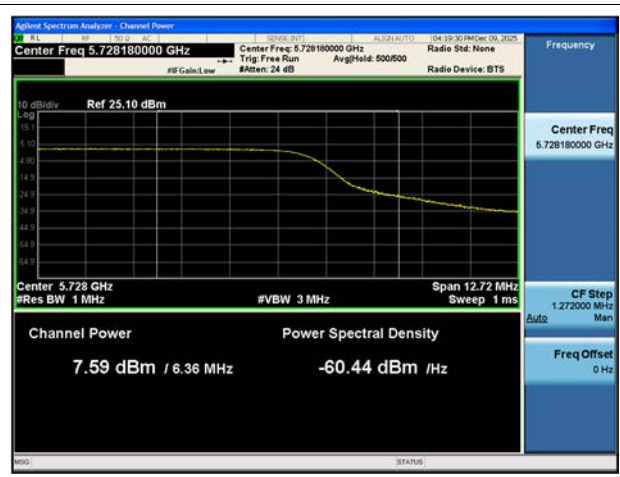


802.11ac(VHT20) UNII 2C Band



802.11ac(VHT20) UNII 3 Band

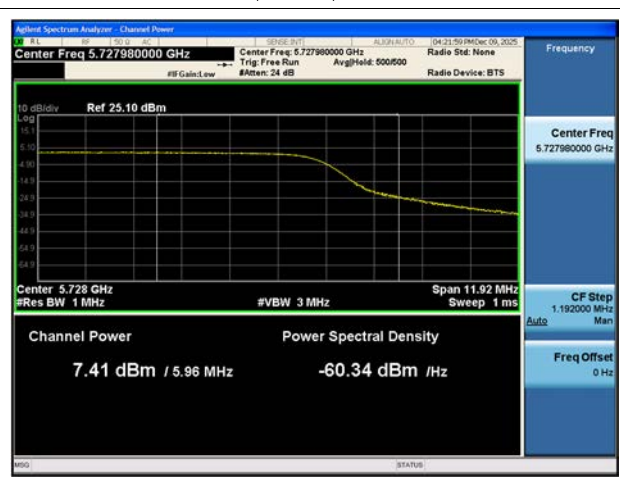


802.11n(HT40) UNII 2C Band

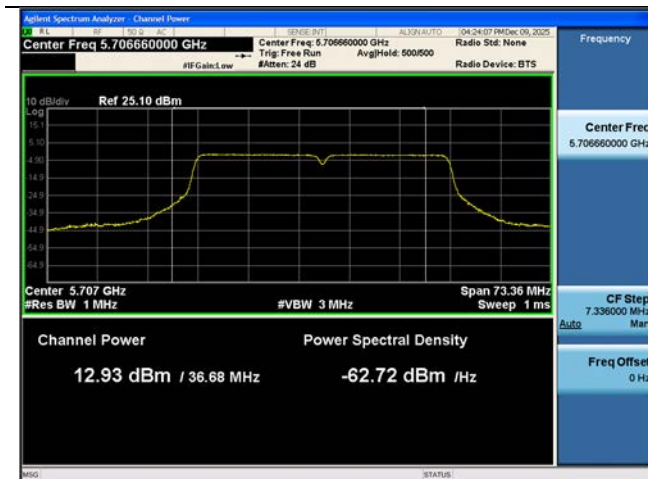


802.11n(HT40) UNII 3 Band




802.11ac(VHT40) UNII 2C Band

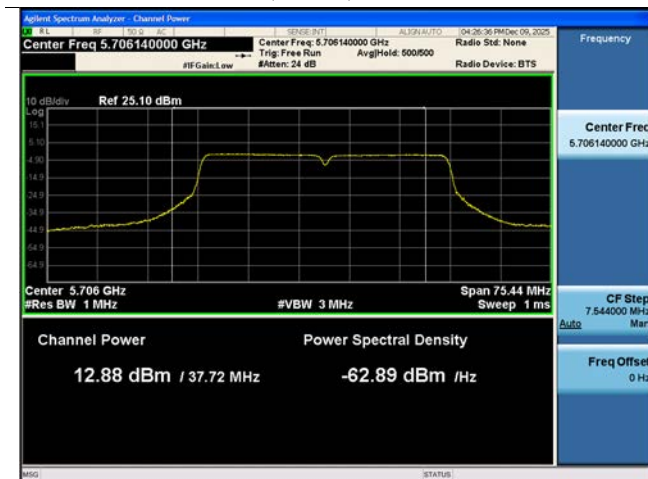


802.11ac(VHT40) UNII 3 Band

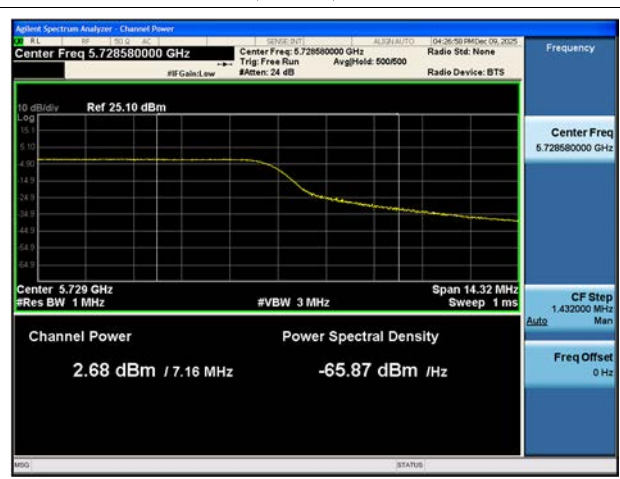

802.11ac(VHT80) UNII 2C Band

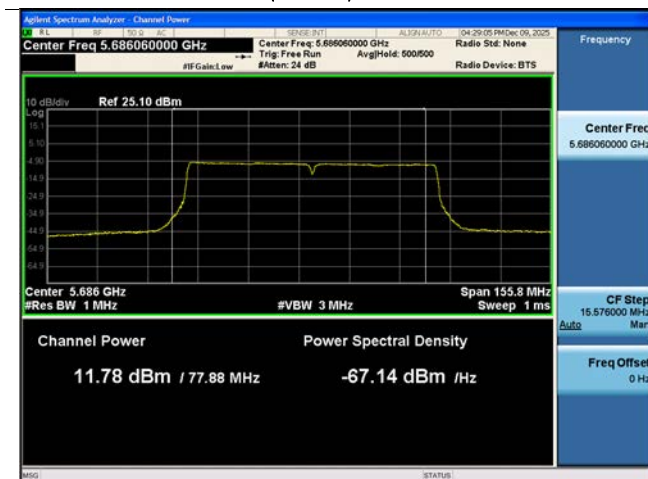


802.11ac(VHT80) UNII 3 Band

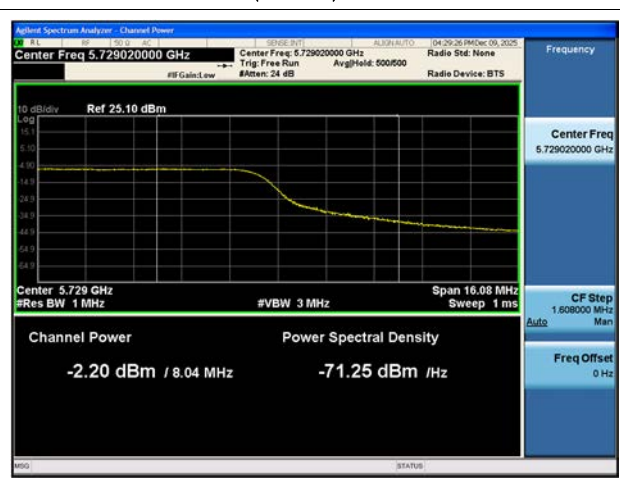

[MIMO (Ant.1)]


802.11a UNII 2C Band

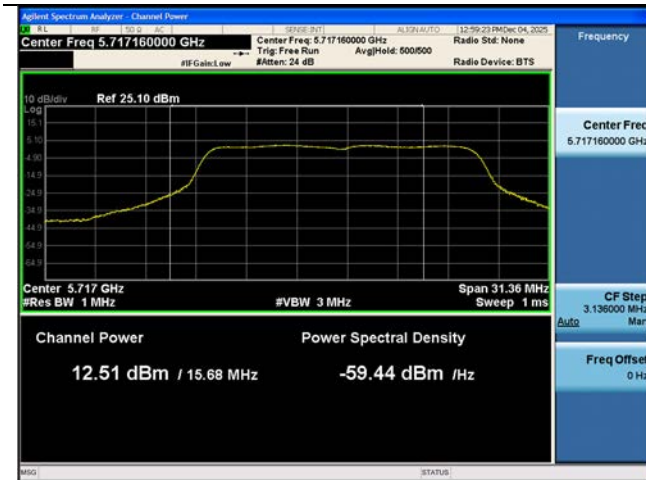

802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band

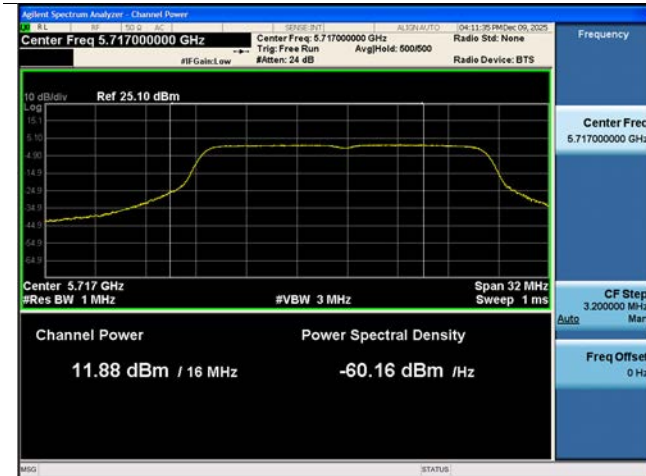


802.11n(HT20) UNII 3 Band




802.11ac(VHT20) UNII 2C Band

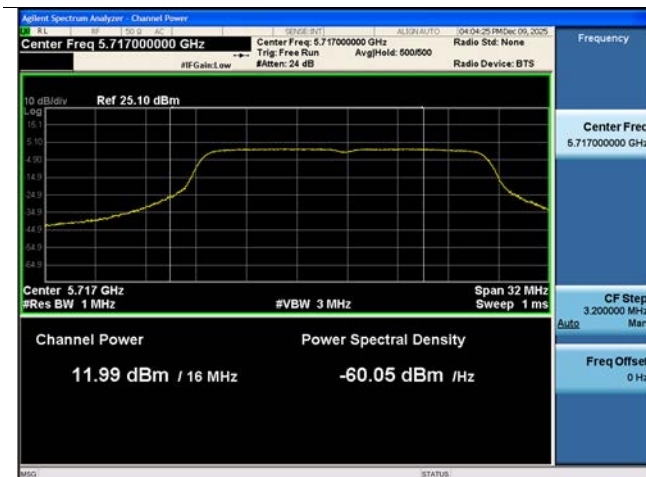

802.11ac(VHT20) UNII 3 Band

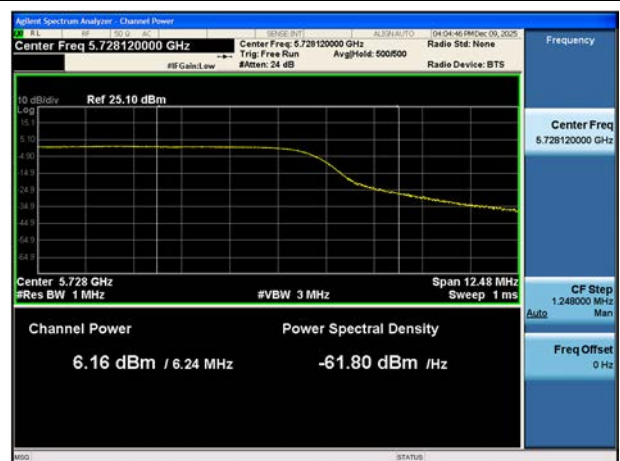


802.11n(HT40) UNII 2C Band

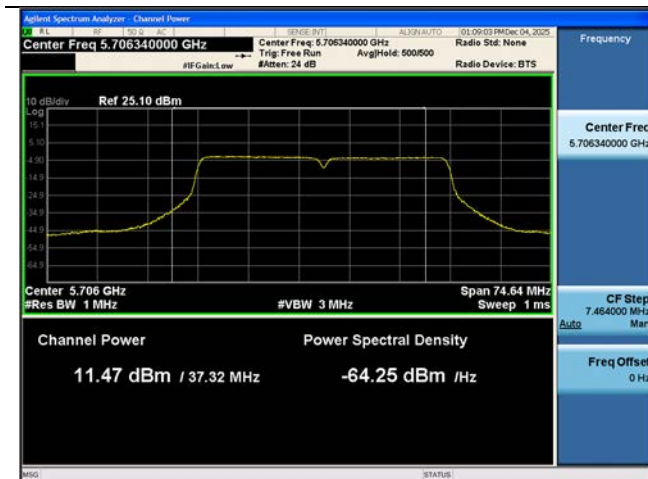


802.11n(HT40) UNII 3 Band




802.11ac(VHT40) UNII 2C Band

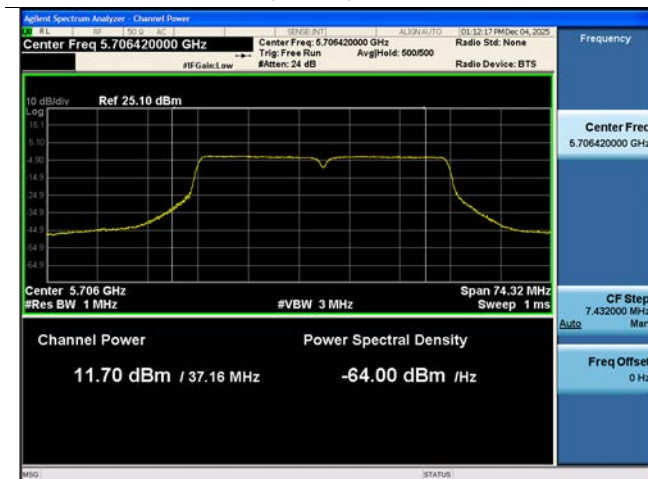


802.11ac(VHT40) UNII 3 Band

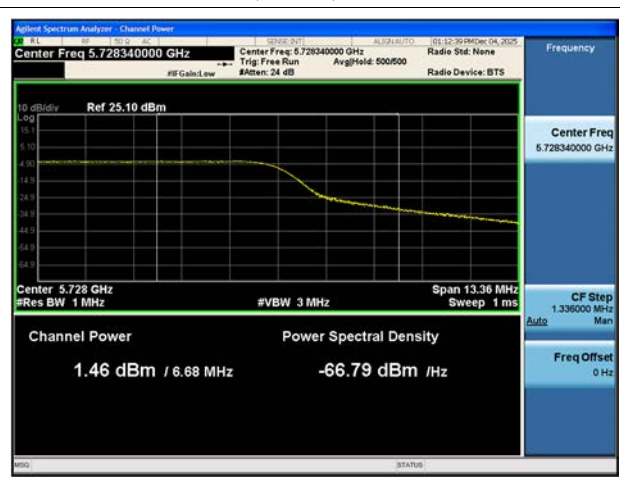

802.11ac(VHT80) UNII 2C Band

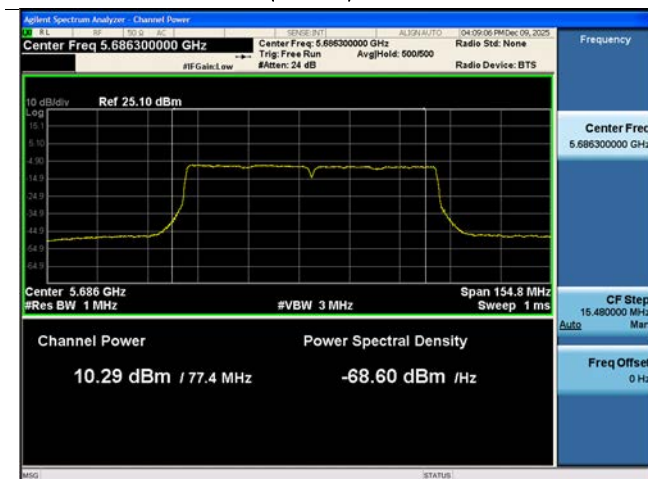


802.11ac(VHT80) UNII 3 Band

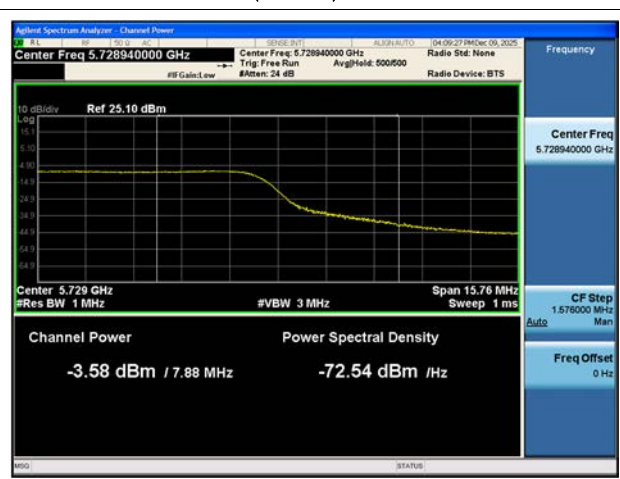

[MIMO (Ant.2)]


802.11a UNII 2C Band

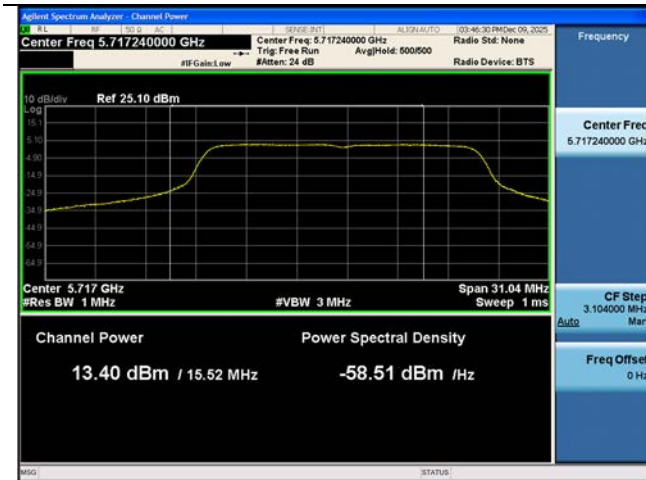

802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band

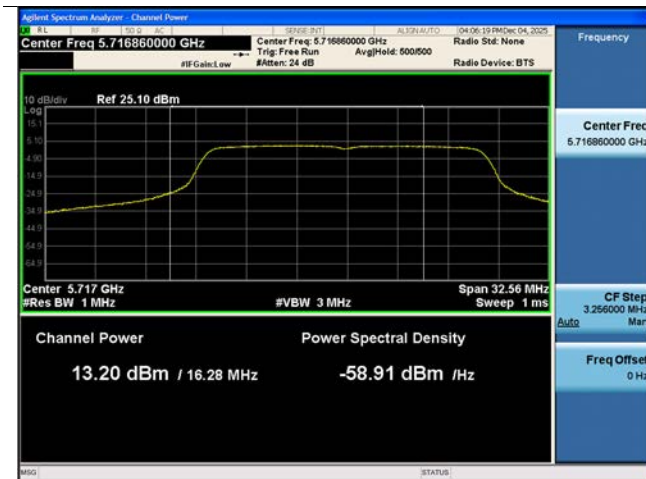


802.11n(HT20) UNII 3 Band




802.11ac(VHT20) UNII 2C Band

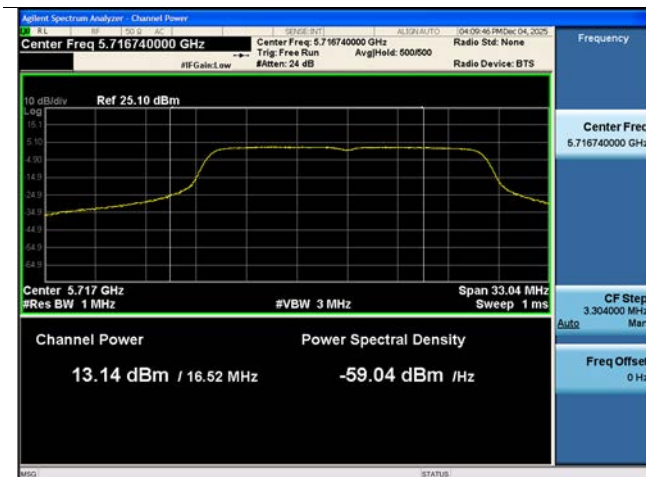

802.11ac(VHT20) UNII 3 Band

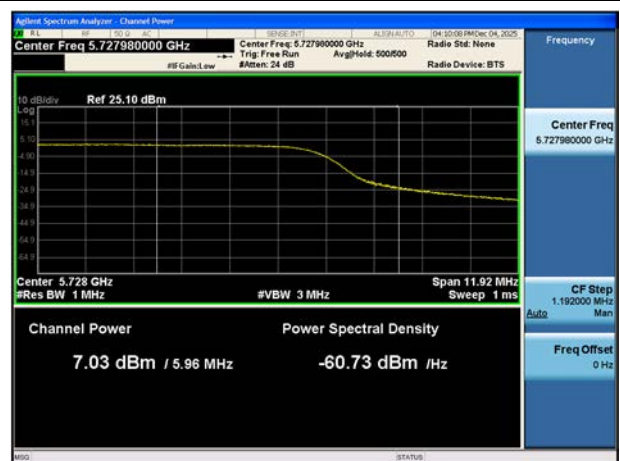


802.11n(HT40) UNII 2C Band

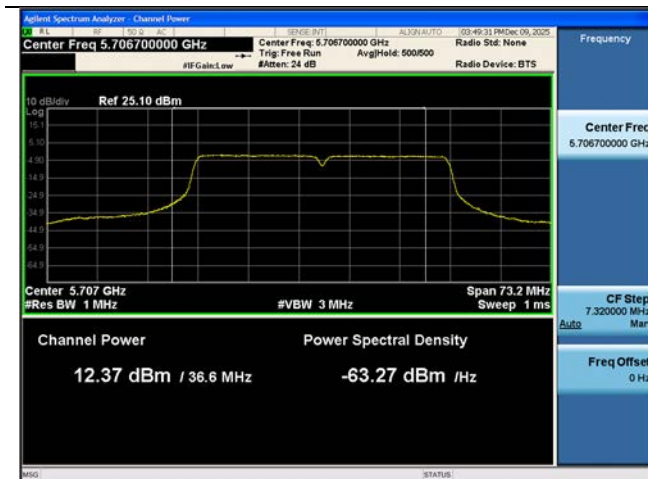

802.11n(HT40) UNII 3 Band



802.11ac(VHT40) UNII 2C Band

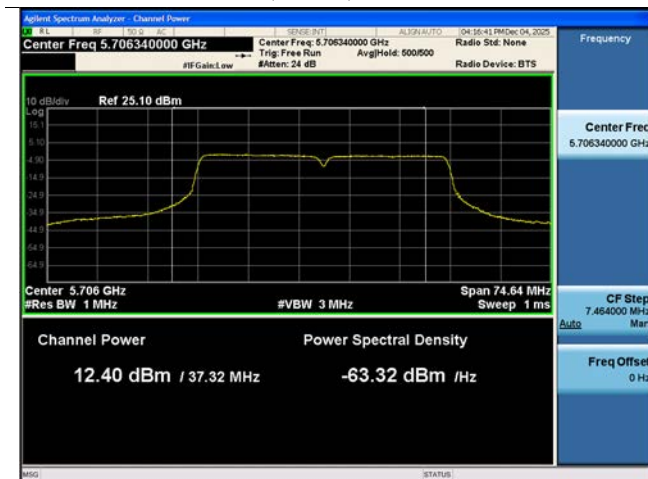


802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band




802.11ac(VHT80) UNII 3 Band

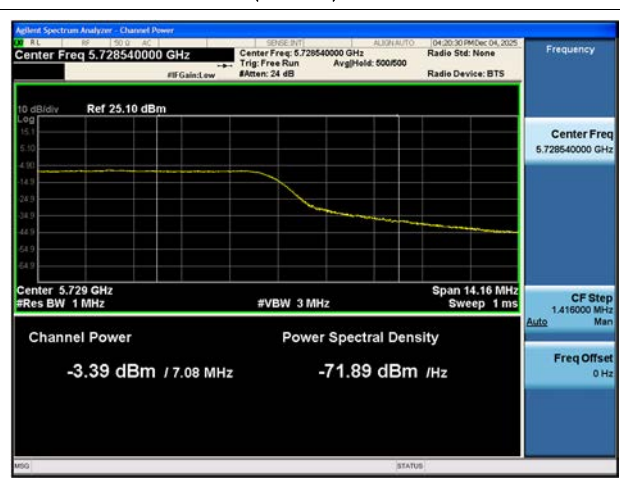

Test Plots(Power Spectral Density)  
[SISO(Ant.1)]

802.11a UNII 2C Band

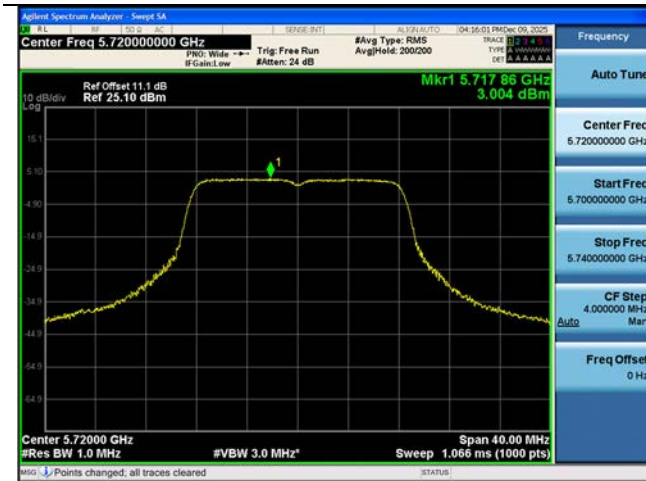


802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band




802.11n(HT20) UNII 3 Band

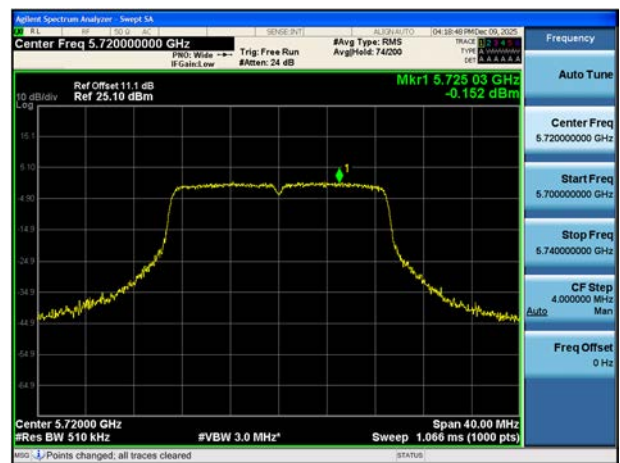

802.11ac(VHT20) UNII 2C Band

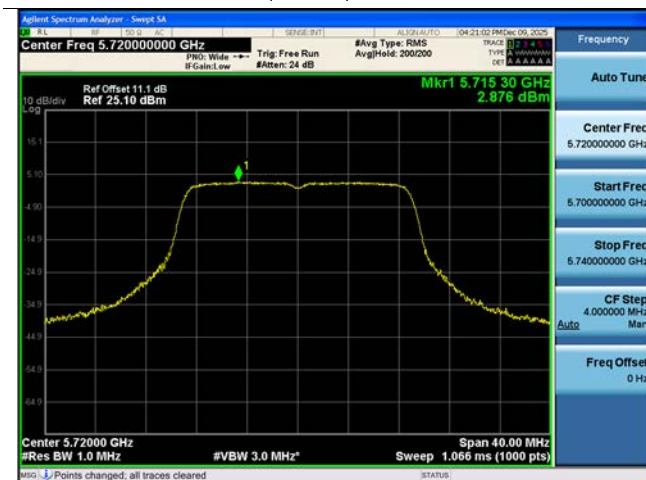

802.11ac(VHT20) UNII 3 Band

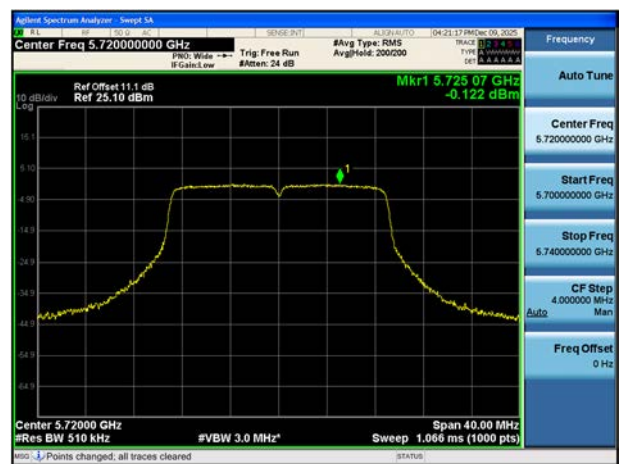

802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band




802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band

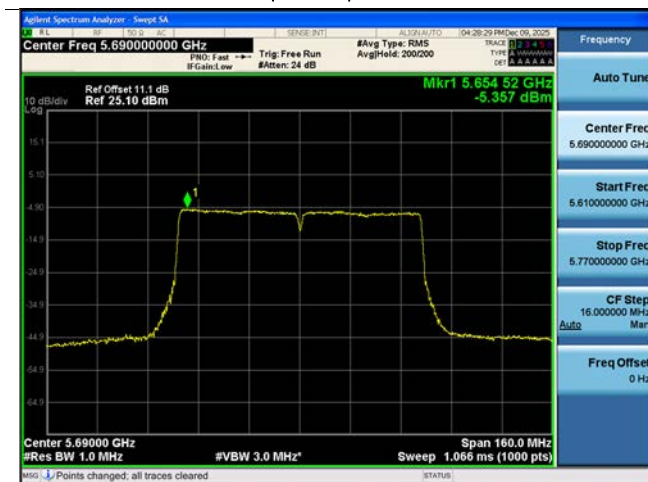

802.11ac(VHT80) UNII 3 Band




[MIMO (Ant.1)]

802.11a UNII 2C Band




802.11a UNII 3 Band

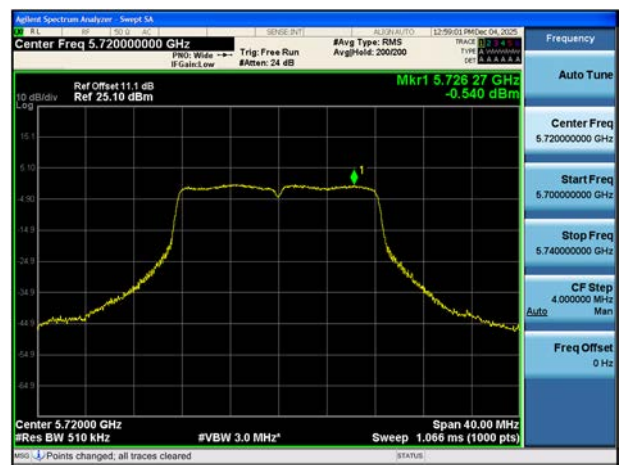

802.11n(HT20) UNII 2C Band




802.11n(HT20) UNII 3 Band

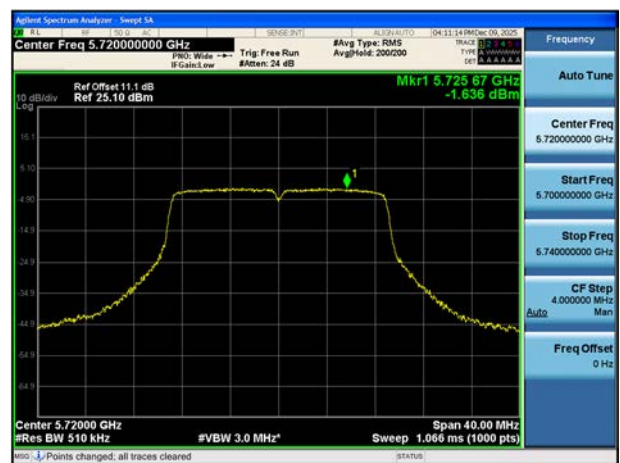

802.11ac(VHT20) UNII 2C Band




802.11ac(VHT20) UNII 3 Band

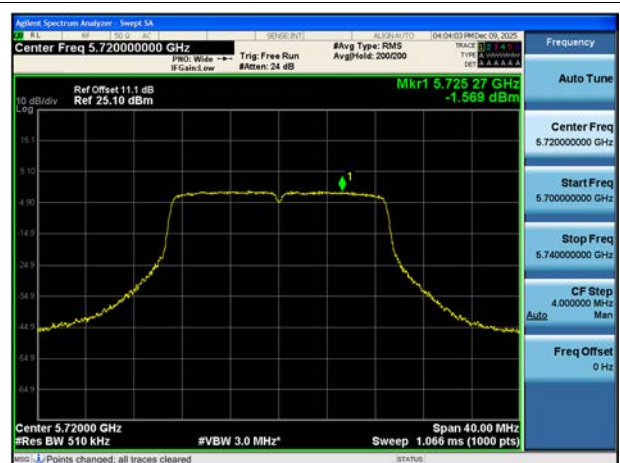

802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band

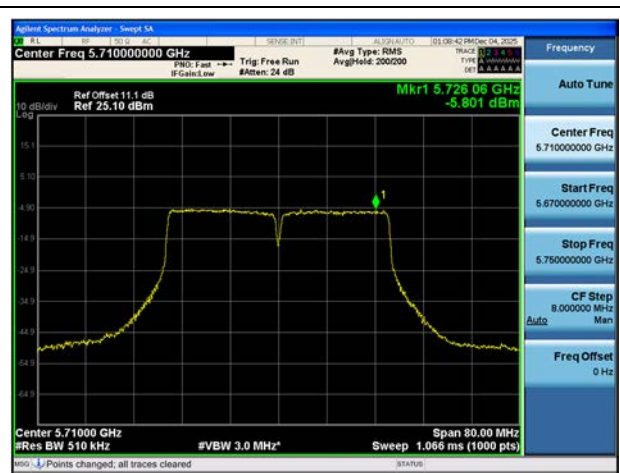


802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band

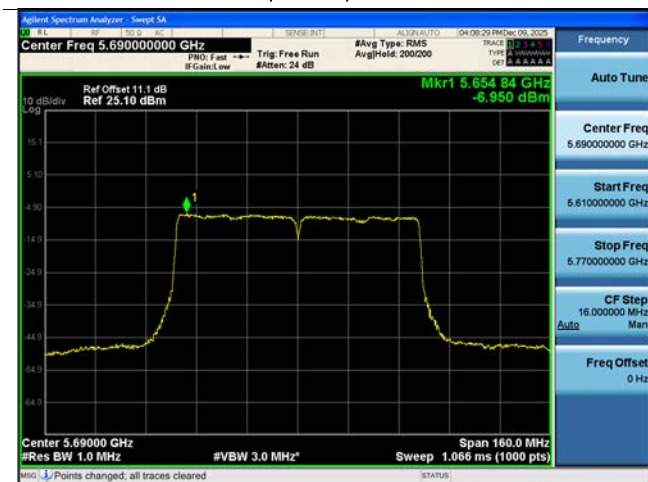

802.11ac(VHT80) UNII 3 Band



[MIMO (Ant.2)]

802.11a UNII 2C Band



802.11a UNII 3 Band



802.11n(HT20) UNII 2C Band




802.11n(HT20) UNII 3 Band



802.11ac(VHT20) UNII 2C Band




802.11ac(VHT20) UNII 3 Band

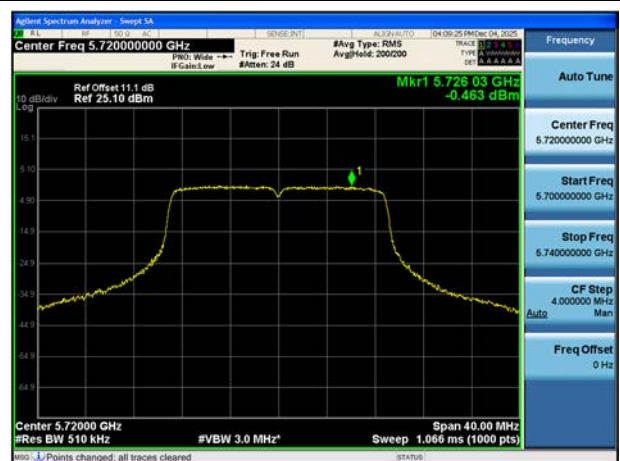

802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band

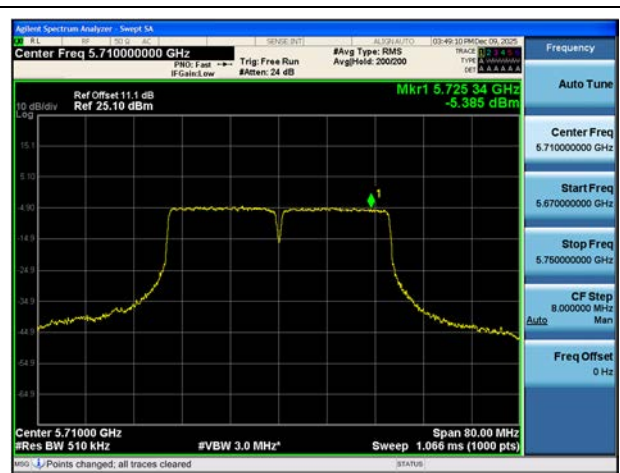

802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band



802.11ac(VHT80) UNII 3 Band



## 10.8 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

| Frequency               | Measured Value | CL+AF+DF-AG | ANT. POL | Total          | Limit          | Margin |
|-------------------------|----------------|-------------|----------|----------------|----------------|--------|
| [MHz]                   | [dB $\mu$ V]   | [dB/m]      | [H/V]    | [dB $\mu$ V/m] | [dB $\mu$ V/m] | [dB]   |
| No Critical peaks found |                |             |          |                |                |        |

**Note:**

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

| Frequency               | Measured Value | A.F+C.L | ANT. POL | Total          | Limit          | Margin |
|-------------------------|----------------|---------|----------|----------------|----------------|--------|
| [MHz]                   | [dB $\mu$ V]   | [dB/m]  | [H/V]    | [dB $\mu$ V/m] | [dB $\mu$ V/m] | [dB]   |
| No Critical peaks found |                |         |          |                |                |        |

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode