



**FCC CFR47 PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE Phone with Bluetooth, DTS/UNII a/b/g/n, ANT+ & NFC**

**FCC ID: A3LSMA500Y**

**REPORT NUMBER: 14U19435-E4**

**ISSUE DATE: NOVEMBER 24, 2014**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 Samsung-ro, Yeongtong-gu, Suwon-si,**  
**Gyeonggi-do, 443-742, Korea**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| Rev. | Issue Date | Revisions     | Revised By |
|------|------------|---------------|------------|
| --   | 11/24/14   | Initial issue | P. Zhang   |

## TABLE OF CONTENTS

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS.....</b>                 | <b>4</b>  |
| <b>2. TEST METHODOLOGY .....</b>                           | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION.....</b>                | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>                | <b>5</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....                | 5         |
| 4.2. SAMPLE CALCULATION.....                               | 5         |
| 4.3. MEASUREMENT UNCERTAINTY .....                         | 5         |
| <b>5. EQUIPMENT UNDER TEST .....</b>                       | <b>6</b>  |
| 5.1. GENERAL DESCRIPTION OF EUT.....                       | 6         |
| 5.2. ANTENNA REQUIREMENTS .....                            | 6         |
| 5.3. WORST-CASE CONFIGURATION AND MODE.....                | 6         |
| 5.4. DESCRIPTION OF TEST SETUP.....                        | 7         |
| 5.5. SUPPORT EQUIPMENT.....                                | 7         |
| 5.6. TEST SETUP .....                                      | 7         |
| 5.7. SETUP DIAGRAM FOR TESTS.....                          | 8         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>             | <b>9</b>  |
| <b>7. MEASUREMENT METHODS.....</b>                         | <b>10</b> |
| <b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS.....</b> | <b>11</b> |
| 8.1. ON TIME AND DUTY CYCLE RESULTS.....                   | 11        |
| <b>9. SUMMARY .....</b>                                    | <b>12</b> |
| <b>10. ANTENNA PORT TEST RESULTS .....</b>                 | <b>13</b> |
| 6 dB BANDWIDTH .....                                       | 13        |
| 10.1. 6 dB BANDWIDTH PLOTS AND TABLE .....                 | 14        |
| 10.2. 99% BANDWIDTH.....                                   | 17        |
| 10.3. OUTPUT POWER.....                                    | 21        |
| 10.4. POWER SPECTRAL DENSITY.....                          | 24        |
| 10.5. CONDUCTED SPURIOUS EMISSIONS .....                   | 28        |
| <b>11. RADIATED TEST RESULTS .....</b>                     | <b>32</b> |
| 11.1. TRANSMITTER ABOVE 1 GHz.....                         | 33        |
| 11.2. TRANSMITTER BELOW 1 GHz .....                        | 63        |
| <b>12. AC POWER LINE CONDUCTED EMISSIONS.....</b>          | <b>65</b> |
| <b>13. SETUP PHOTOS.....</b>                               | <b>68</b> |

## 1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.  
EUT DESCRIPTION: GSM/WCDMA/LTE Phone with Bluetooth, DTS/UNII a/b/g/n,  
ANT+ & NFC  
MODEL: SM-A500Y  
SERIAL NUMBER: 1989213 (CONDUCTED); 1989211 (RADIATED)  
DATE TESTED: NOVEMBER 3-7, 2014

| APPLICABLE STANDARDS            |              |
|---------------------------------|--------------|
| STANDARD                        | TEST RESULTS |
| CFR 47 Part 15 Subpart C 15.247 | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



PENG ZHANG  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL VERIFICATION SERVICES INC

Tested By:



CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.247.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                                        | 47266 Benicia Street                             |
|-------------------------------------------------------------|--------------------------------------------------|
| <input type="checkbox"/> Chamber A (IC: 2324B-1)            | <input type="checkbox"/> Chamber D (IC: 2324B-4) |
| <input checked="" type="checkbox"/> Chamber B (IC: 2324B-2) | <input type="checkbox"/> Chamber E (IC: 2324B-5) |
| <input checked="" type="checkbox"/> Chamber C (IC: 2324B-3) | <input type="checkbox"/> Chamber F (IC: 2324B-6) |
|                                                             | <input type="checkbox"/> Chamber G (IC: 2324B-7) |
|                                                             | <input type="checkbox"/> Chamber H (IC: 2324B-8) |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 26000 MHz | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%

## 5. EQUIPMENT UNDER TEST

### 5.1. GENERAL DESCRIPTION OF EUT

|                            |                                                                  |              |                    |                   |
|----------------------------|------------------------------------------------------------------|--------------|--------------------|-------------------|
| <b>EUT DESCRIPTION</b>     | GSM/WCDMA/LTE Phone with Bluetooth, DTS/UNII a/b/g/n, ANT+ & NFC |              |                    |                   |
| <b>MODEL NUMBER</b>        | SM-A500Y                                                         |              |                    |                   |
| <b>RADIO TYPE</b>          | WLAN 2.4GHz b/g/nHT20                                            |              |                    |                   |
| <b>MODULATION TYPE</b>     | DSSS: CCK, DQPSK, DBPSK<br>OFDM: 64QAM, 16QAM, QPSK, BPSK        |              |                    |                   |
| <b>OPERATING FREQUENCY</b> | 2412 ~ 2462 MHz                                                  |              |                    |                   |
| <b>NUMBER OF CHANNEL</b>   | 802.11b/g/nHT20: 11                                              |              |                    |                   |
| <b>CHANNEL SPACING</b>     | 5 MHz                                                            |              |                    |                   |
| <b>MAX OUTPUT POWER</b>    | Frequency Range (MHz)                                            | Mode         | Output Power (dBm) | Output Power (mW) |
|                            | 2412 - 2462                                                      | 802.11b      | 17.04              | 50.58             |
|                            | 2412 - 2462                                                      | 802.11g      | 13.19              | 20.84             |
|                            | 2412 - 2462                                                      | 802.11n HT20 | 12.17              | 16.48             |
| <b>ANTENNA TYPE</b>        | FPCB                                                             |              |                    |                   |
| <b>ANTENNA GAIN</b>        | -4.08 dBi                                                        |              |                    |                   |

### 5.2. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203 an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

\*The antennas of this device are permanently attached.

\*\*The device Complies with the requirements of §15.203.

### 5.3. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.4. DESCRIPTION OF TEST SETUP

## 5.5. SUPPORT EQUIPMENT

| Support Equipment List |              |            |               |        |
|------------------------|--------------|------------|---------------|--------|
| Description            | Manufacturer | Model      | Serial Number | FCC ID |
| AC Adapter             | SAMSUNG      | EP-TA50EWE | N/A           | N/A    |
| Headset                | SAMSUNG      | EHS64AVFWE | N/A           | N/A    |


## I/O CABLES

| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | DC Power             | 1              | Mini-USB   | Shielded         | 1.2m    |
| 2              | Audio    | Audio                | 1              | Mini-Jack  | Unshielded       | 1m      |

## 5.6. TEST SETUP

The EUT is a stand-alone unit during the tests. Test software EUT was set in the Samsung Keystoring menu to exercise the radio card.

## 5.7. SETUP DIAGRAM FOR TESTS

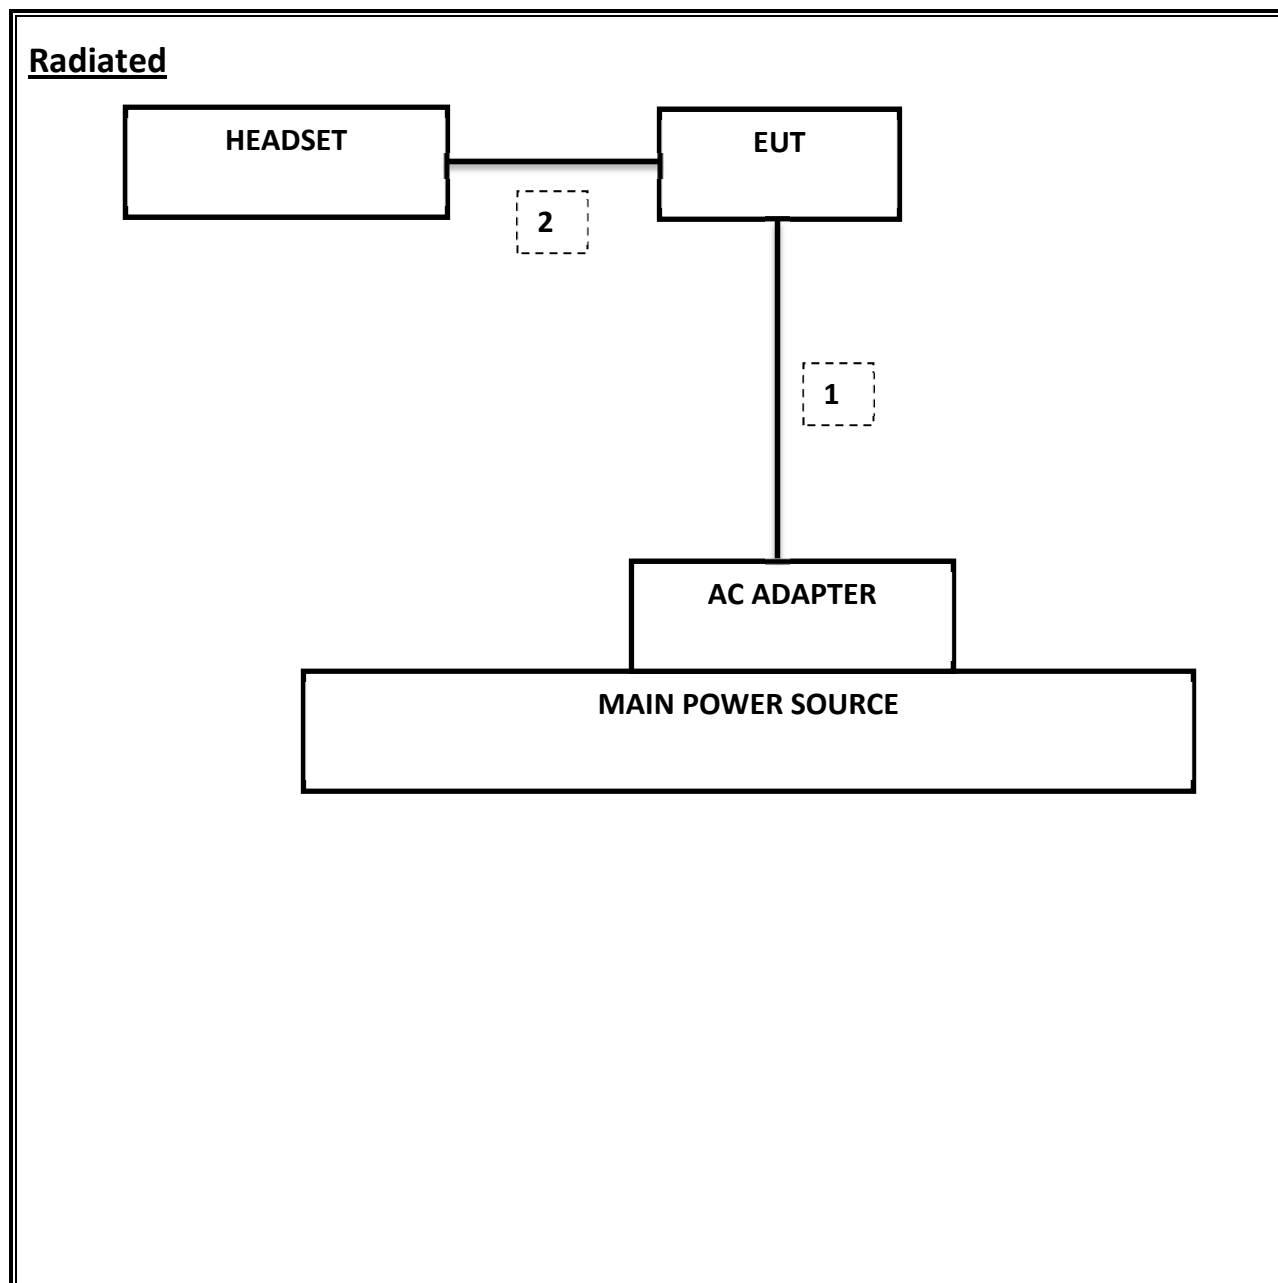

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                                                                                                             |                |             |         |          |
|---------------------------------------------------------------------------------------------------------------------------------|----------------|-------------|---------|----------|
| Description                                                                                                                     | Manufacturer   | Model       | Asset   | Cal Due  |
| Spectrum Analyzer, 44 GHz                                                                                                       | Agilent / HP   | E4446A      | C01069  | 12/20/14 |
| Spectrum Analyzer, 9KHz-40GHz                                                                                                   | HP             | 8564E       | C00986  | 04/01/15 |
| EMI Test Receiver, 9 kHz-7 GHz                                                                                                  | R & S          | ESCI 7      | 1000741 | 08/13/15 |
| EMI Test Receiver, 30 MHz                                                                                                       | R & S          | ESHS 20     | N02396  | 08/18/15 |
| Peak Power Meter                                                                                                                | Agilent / HP   | E4416A      | C00963  | 12/13/14 |
| Peak / Average Power Sensor                                                                                                     | Agilent / HP   | E9327A      | C00964  | 12/13/14 |
| Antenna, Horn, 1-18 GHz                                                                                                         | ETS            | 3117        | C01022  | 02/21/15 |
| Antenna, Horn, 18- 26 GHz                                                                                                       | ARA            | MWH-1826/B  | C00946  | 11/12/14 |
| Antenna, Horn, 26-40 GHz                                                                                                        | ARA            | MWH-2640    | C00891  | 06/28/15 |
| Antenna, Bilog, 30MHz-1 GHz                                                                                                     | Sunol Sciences | JB1         | T243    | 03/06/15 |
| RF Preamplifier, 100KHz -> 1300MHz                                                                                              | HP             | TBD         | C00825  | 06/01/15 |
| RF Preamplifier, 1GHz - 18GHz                                                                                                   | Miteq          | NSP4000-SP2 | 924343  | 03/23/15 |
| RF Preamplifier, 1GHz - 26.5GHz                                                                                                 | HP             | 8449B       | F00351  | 06/27/15 |
| AC Power Supply, 2,500VA 45-500Hz                                                                                               | Elgar-Ametek   | CW2501M     | F00013  | CNR      |
| RF Preamplifier, 1GHz - 40GHz                                                                                                   | Miteq          | NSP4000-SP2 | C00990  | 08/20/15 |
| Attenuator / Switch driver                                                                                                      | HP             | 11713A      | F00204  | CNR      |
| Low Pass Filter 3GHz                                                                                                            | Micro-Tronics  | LPS17541    | F00219  | 05/23/15 |
| High Pass Filter 5GHz                                                                                                           | Micro-Tronics  | HPS17542    | F00222  | 05/22/15 |
| High Pass Filter 6GHz                                                                                                           | Micro-Tronics  | HPM17543    | F00224  | 05/22/15 |
| <b>NOTE:</b> The calibration interval of the above test instrument is 12 months and the calibrations are traceable to NIST USA. |                |             |         |          |

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power and AVGPS-3 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.

### PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

### 8.1. ON TIME AND DUTY CYCLE RESULTS

| Mode                 | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/T Minimum VBW (kHz) |
|----------------------|------------------|---------------|-----------------------|----------------|-----------------------------------|-----------------------|
| <b>2400MHz Bands</b> |                  |               |                       |                |                                   |                       |
| 802.11b              | 8.39             | 9             | 0.986                 | 98.6%          | 0.00                              | 0.010                 |
| 802.11g              | 1.31             | 1             | 0.929                 | 92.9%          | 0.32                              | 0.763                 |
| 802.11n HT20         | 1.29             | 1.39          | 0.93                  | 92.8%          | 0.32                              | 0.78                  |

## 9. SUMMARY

The model FCC ID: A3LSMG500Y shares the same enclosure and circuit board as mode FCC ID: A3LSMA500FU. The WLAN/Bluetooth/NFC/ANT+ circuitry and layout, including antenna, are almost identical between the two units. The WLAN/Bluetooth/NFC/ANT+ antenna and surrounding circuitry is the same between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMA500FU remains representative of this model (FCC ID A3LSMA500Y) test data for FCC ID: A3LSMA500FU is being submitted for this application.

| FCC Part Section   | RSS Section(s)                       | Test Description                        | Test Limit | Test Condition | Test Result | Worst Case  |
|--------------------|--------------------------------------|-----------------------------------------|------------|----------------|-------------|-------------|
| 15.247 (a)(2)      | RSS-210 A8.2(a)                      | Occupied Band width (6dB)               | >500KHz    | Conducted      | Pass        | 9.99MHz     |
| 2.1051, 15.247 (d) | RSS-210 A8.5                         | Band Edge / Conducted Spurious Emission | -20dBc     |                | Pass        | -30.37dBm   |
| 15.247             | RSS-210 A8.4                         | TX conducted output power               | <30dBm     |                | Pass        | 17.04dBm    |
| 15.247             | RSS-210 A8.2                         | PSD                                     | <8dBm      |                | Pass        | -11.22dBm   |
| 15.207 (a)         | RSS-GEN 7.2.2                        | AC Power Line conducted emissions       | Section 10 |                | Pass        | 41.72dBuV   |
| 15.205, 15.209     | RSS-210 Clause 2.6, RSS-210 Clause 6 | Radiated Spurious Emission              | < 54dBuV/m | Radiated       | Pass        | 45.08dBuV/m |

### WLAN 2.4GHz 802.11 b/g/nHT20 Channels and Frequency List

| Channel | Frequency (MHz) |
|---------|-----------------|
| 1       | 2412            |
| 2       | 2417            |
| 3       | 2422            |
| 4       | 2427            |
| 5       | 2432            |
| 6       | 2437            |
| 7       | 2442            |
| 8       | 2447            |
| 9       | 2452            |
| 10      | 2457            |
| 11      | 2462            |

## **10. ANTENNA PORT TEST RESULTS**

### **6 dB BANDWIDTH**

#### **LIMITS**

FCC §15.247 (a) (2)


The minimum 6 dB bandwidth shall be at least 500 kHz.


#### **TEST PROCEDURE**


Reference to KDB 558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### **RESULTS**

## 10.1. 6 dB BANDWIDTH PLOTS AND TABLE

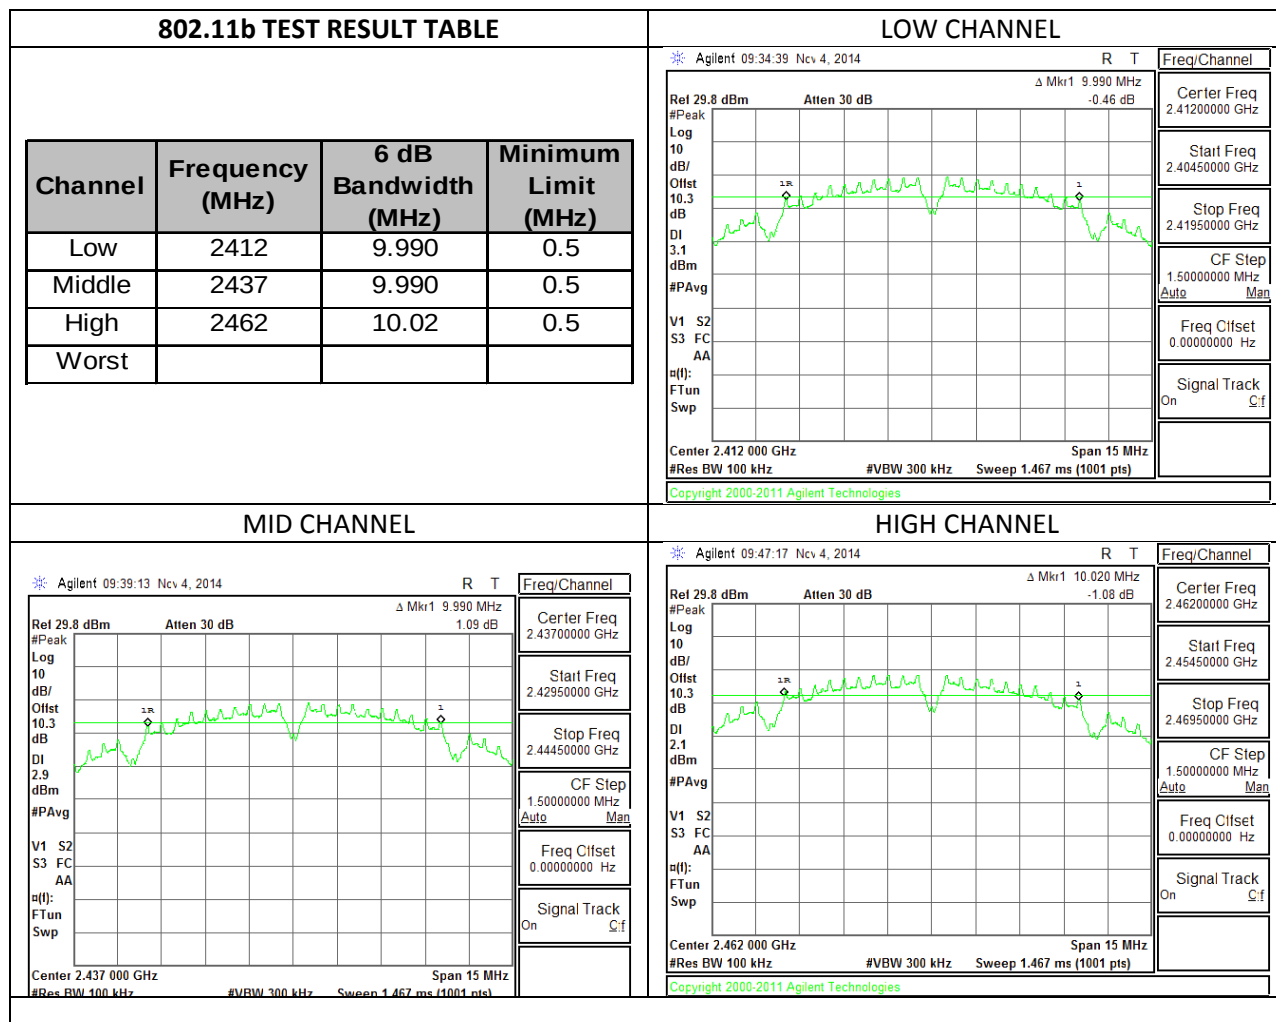

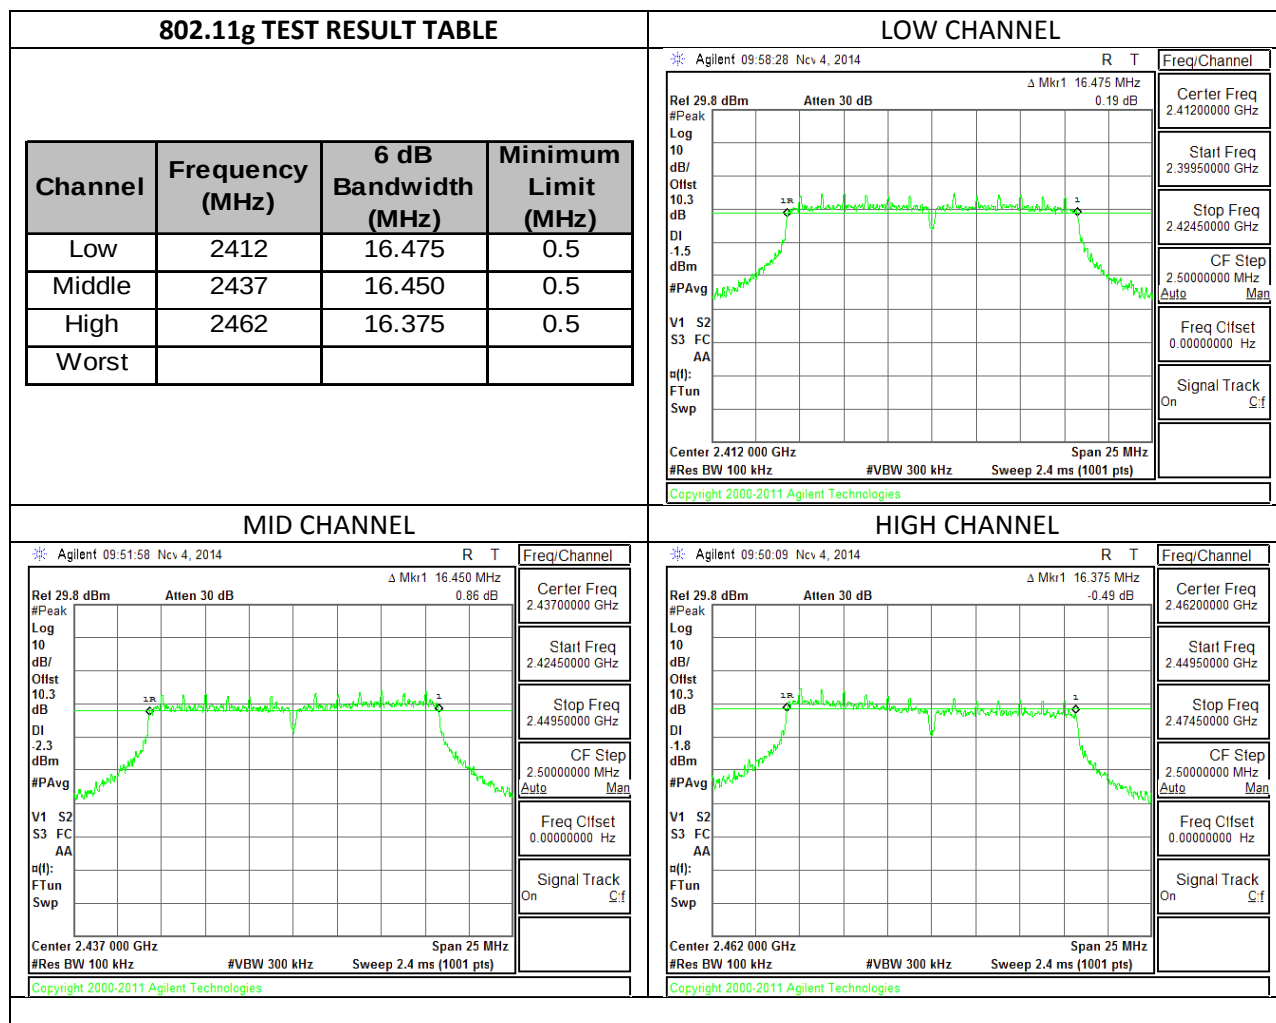

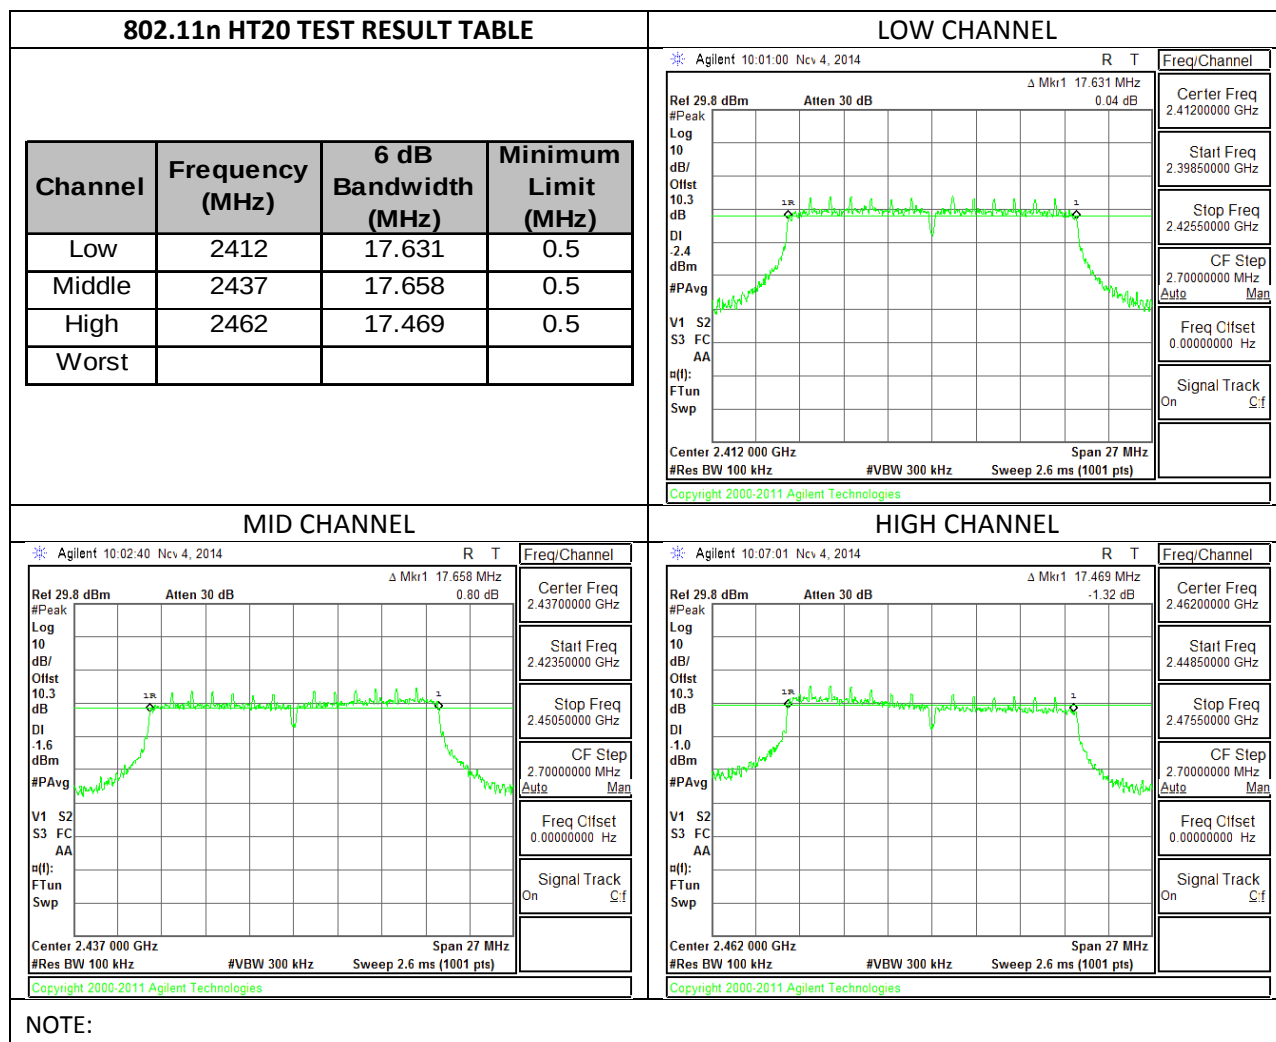


## **10.2. 99% BANDWIDTH**


### **LIMITS**


None; for reporting purposes only.

### **RESULTS**

# **99% BANDWIDTH PLOTS AND TABLE**

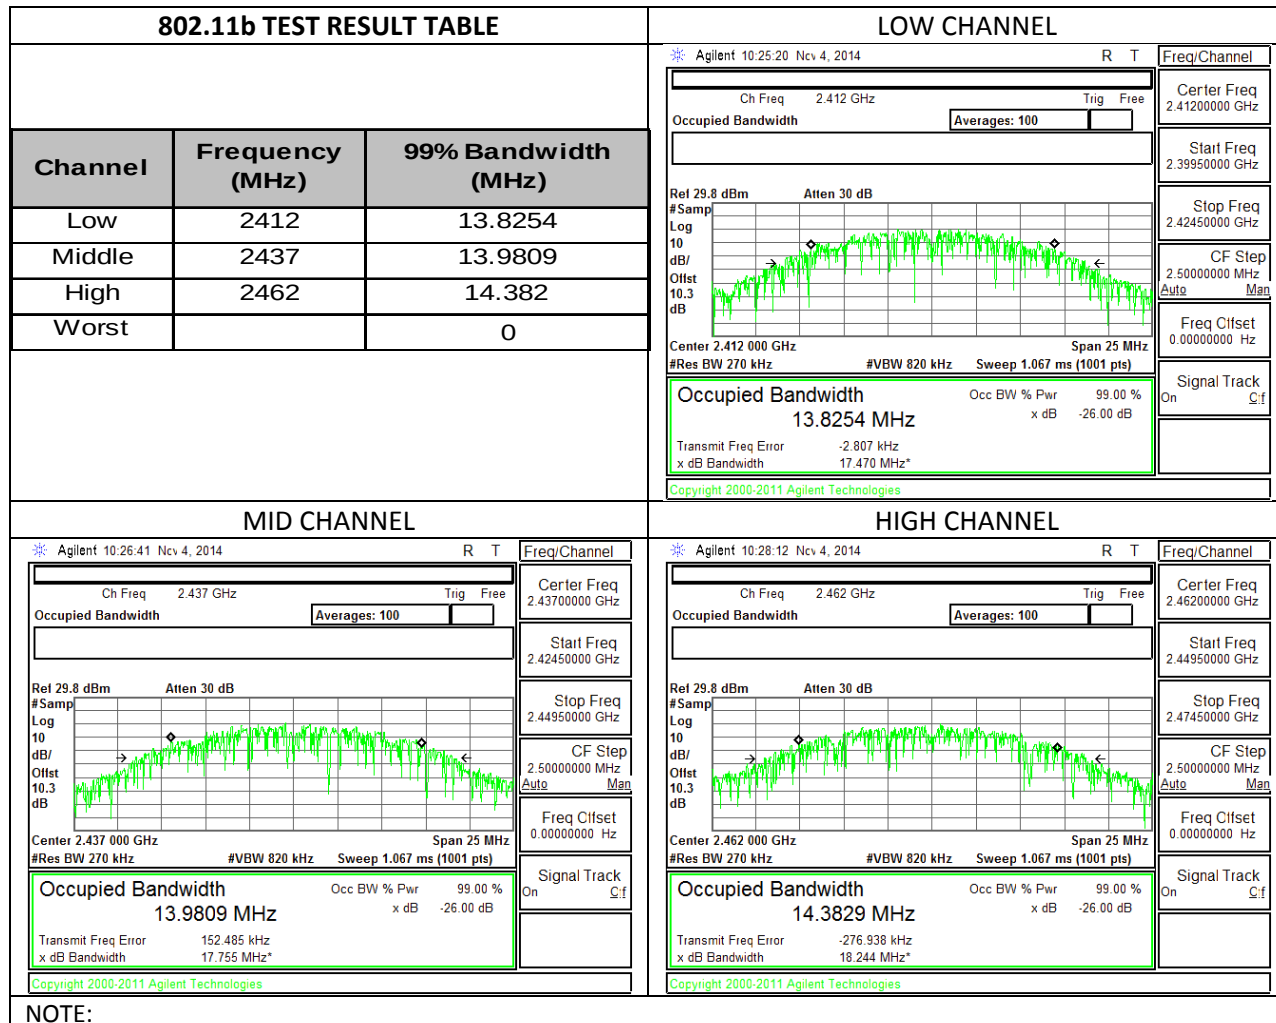

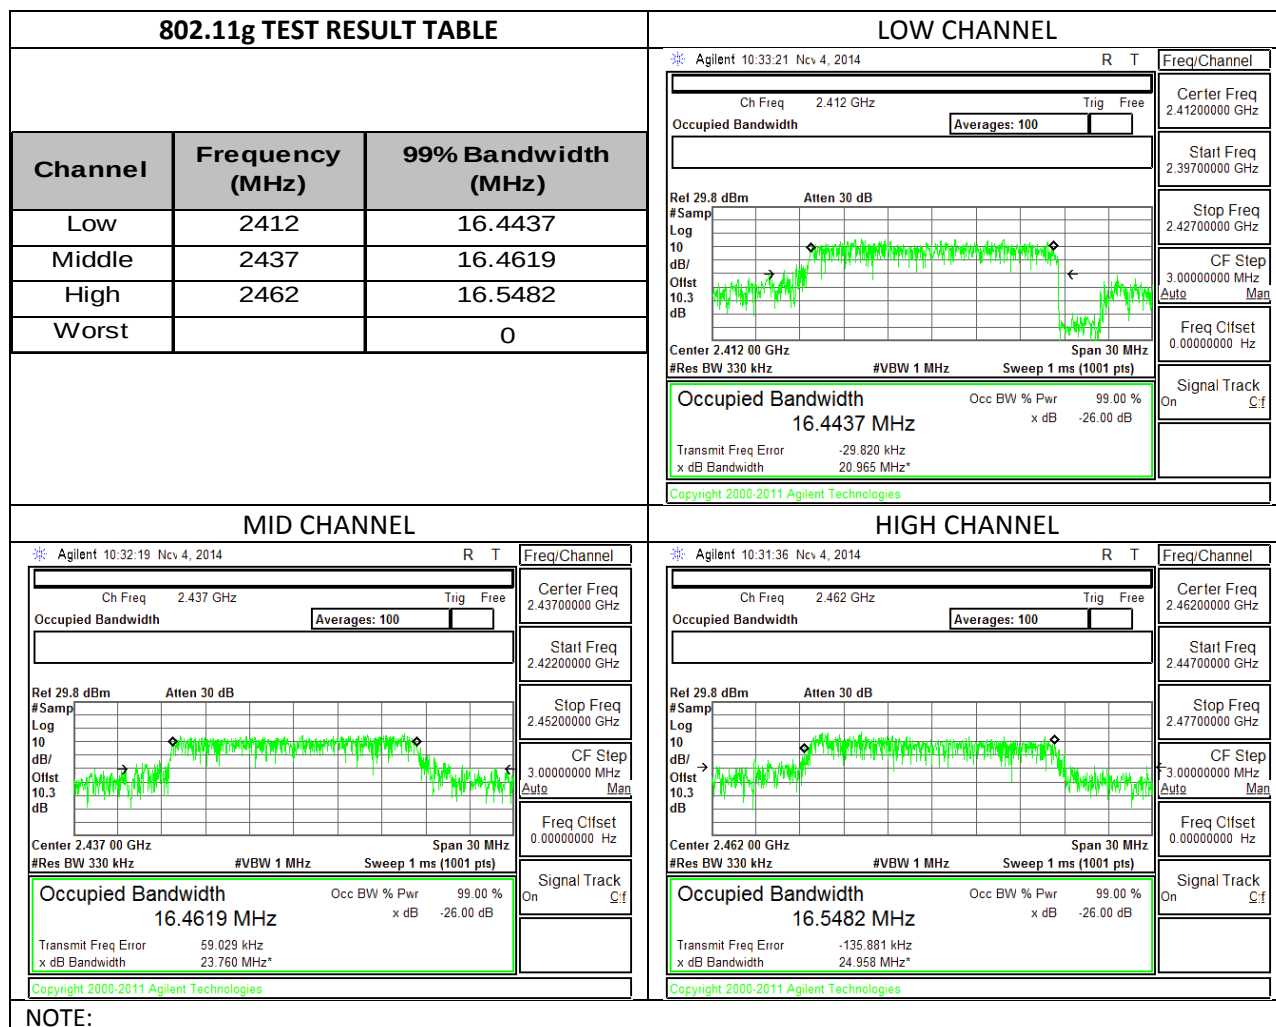

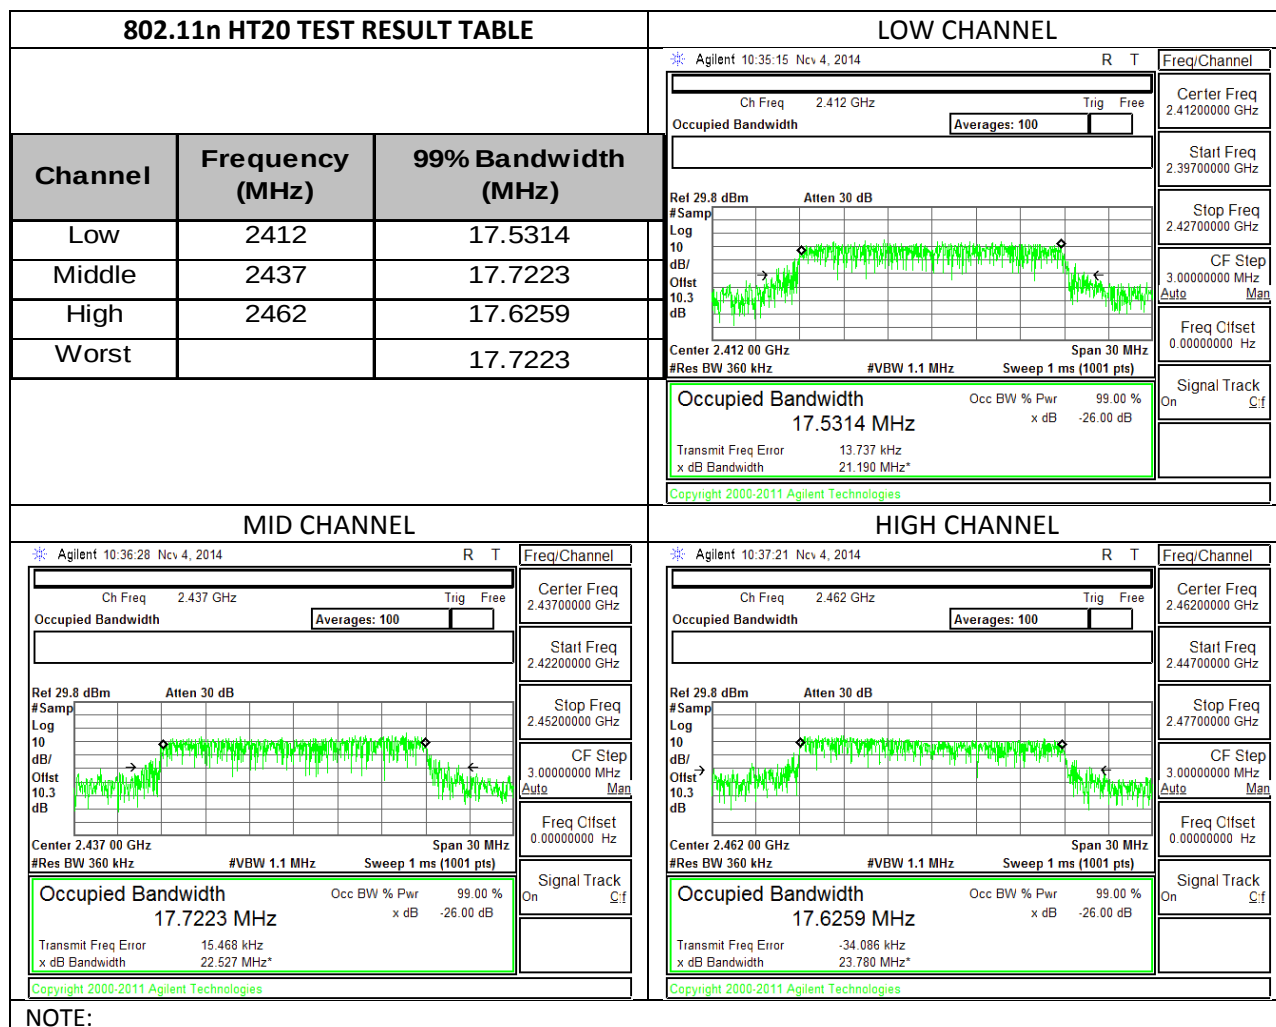

### **10.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power.

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 0.2 dB (including 10 dB pad and 0.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### **RESULTS**

**OUTPUT POWER TEST RESULT**

**802.11b TEST RESULT TABLE**

**Limits**

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|-----------------|------------------------|-----------------------|----------------------|---------------------|-----------------|
| Low     | 2412            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |
| Mid     | 2437            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |
| High    | 2462            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |

**Results**

| Channel | Frequency (MHz) | Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dBm) |
|---------|-----------------|------------------|--------------------------|-------------------|--------------|
| Low     | 2412            | 16.98            | 16.98                    | 30.00             | -13.02       |
| Mid     | 2437            | 17.04            | 17.04                    | 30.00             | -12.96       |
| High    | 2462            | 16.84            | 16.84                    | 30.00             | -13.16       |
| Worst   |                 |                  | 17.04                    |                   |              |

**802.11g TEST RESULT TABLE**

**Limits**

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|-----------------|------------------------|-----------------------|----------------------|---------------------|-----------------|
| Low     | 2412            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |
| Mid     | 2437            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |
| High    | 2462            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |

**Results**

| Channel | Frequency (MHz) | Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dBm) |
|---------|-----------------|------------------|--------------------------|-------------------|--------------|
| Low     | 2412            | 12.70            | 12.70                    | 30.00             | -17.30       |
| Mid     | 2437            | 13.19            | 13.19                    | 30.00             | -16.81       |
| High    | 2462            | 12.72            | 12.72                    | 30.00             | -17.28       |
| Worst   |                 |                  | 13.19                    |                   |              |

NOTE:

**802.11n HT20 TEST RESULT TABLE**

**Limits**

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|-----------------|------------------------|-----------------------|----------------------|---------------------|-----------------|
| Low     | 2412            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |
| Mid     | 2437            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |
| High    | 2462            | -4.08                  | 30.00                 | 30                   | 36                  | 30.00           |

**Results**

| Channel | Frequency (MHz) | Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dBm) |
|---------|-----------------|------------------|--------------------------|-------------------|--------------|
| Low     | 2412            | 11.93            | 11.93                    | 30.00             | -18.07       |
| Mid     | 2437            | 12.17            | 12.17                    | 30.00             | -17.83       |
| High    | 2462            | 12.06            | 12.06                    | 30.00             | -17.94       |
| Worst   |                 |                  | 12.17                    |                   |              |

NOTE:

## **10.4. POWER SPECTRAL DENSITY**

### **LIMITS**

FCC §15.247 (e)


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### **TEST PROCEDURE**


Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r02.

### **RESULTS**

# POWER SPECTRAL DENSITY PLOTS AND TABLE

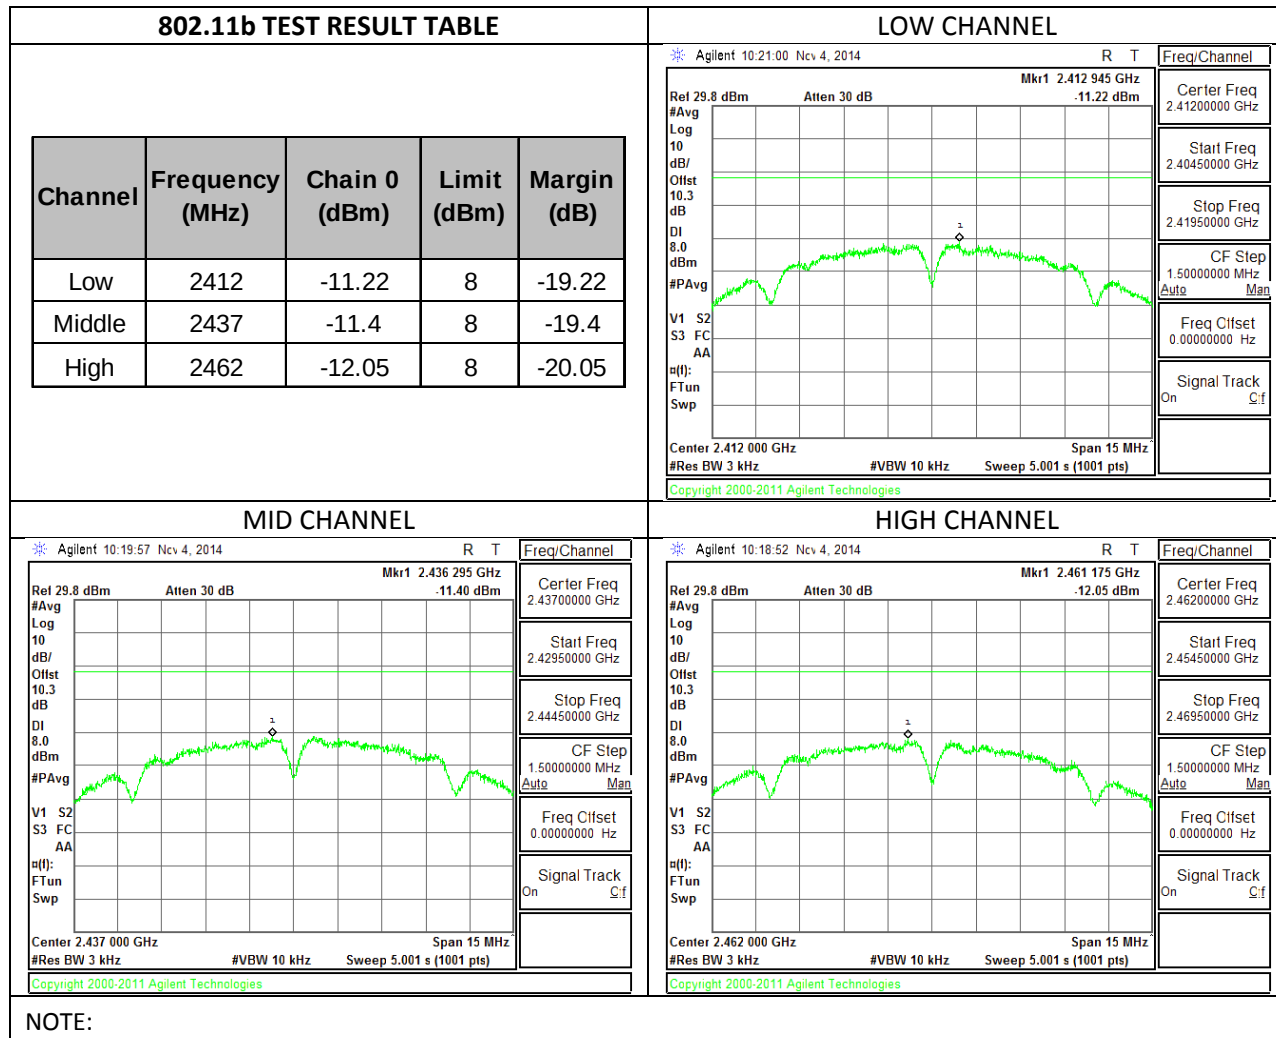

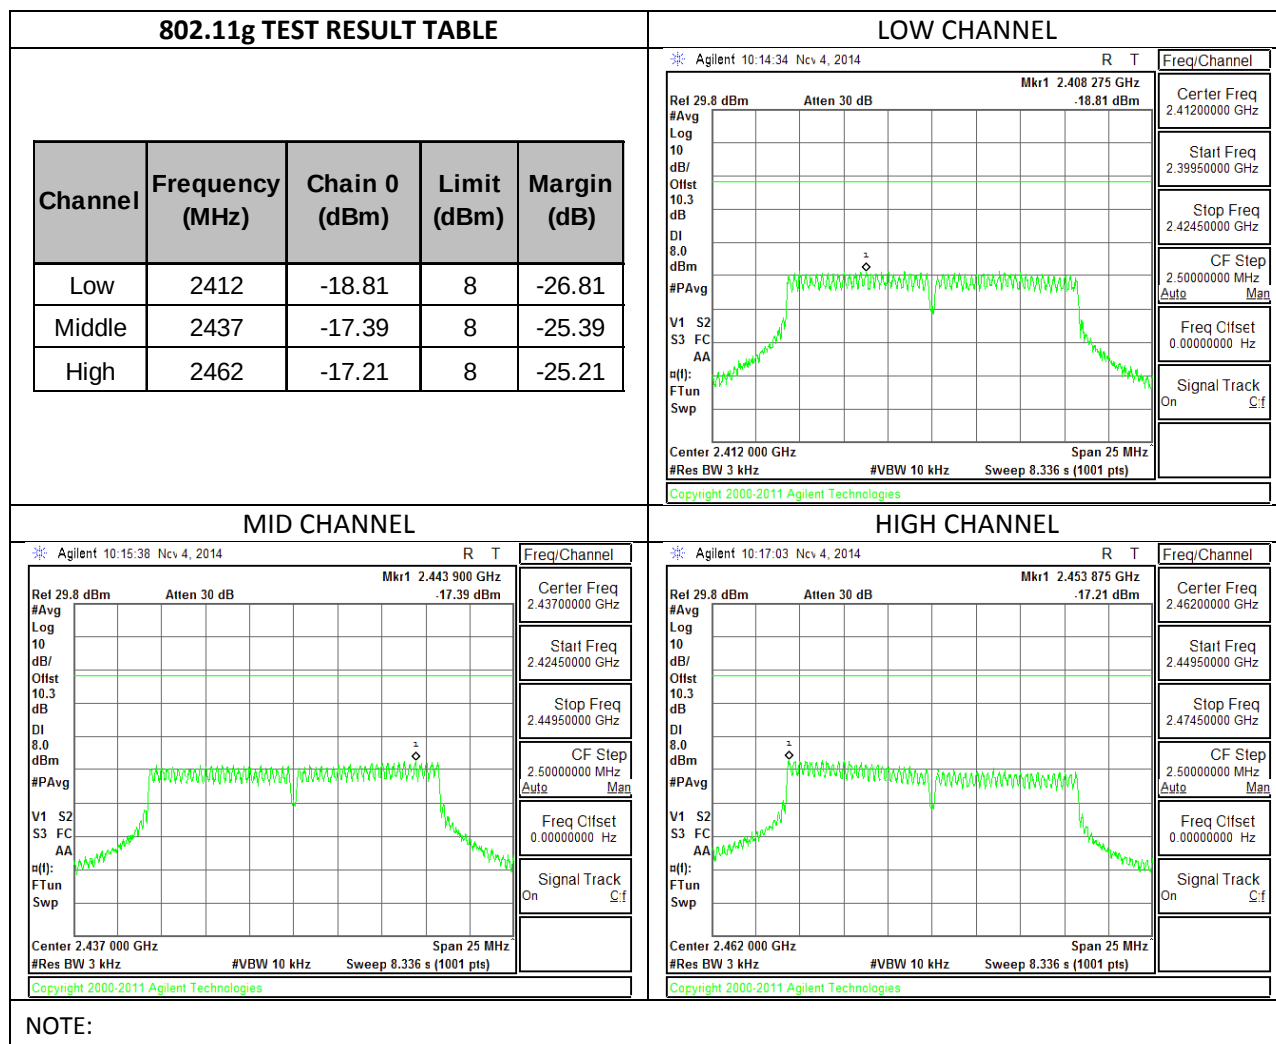

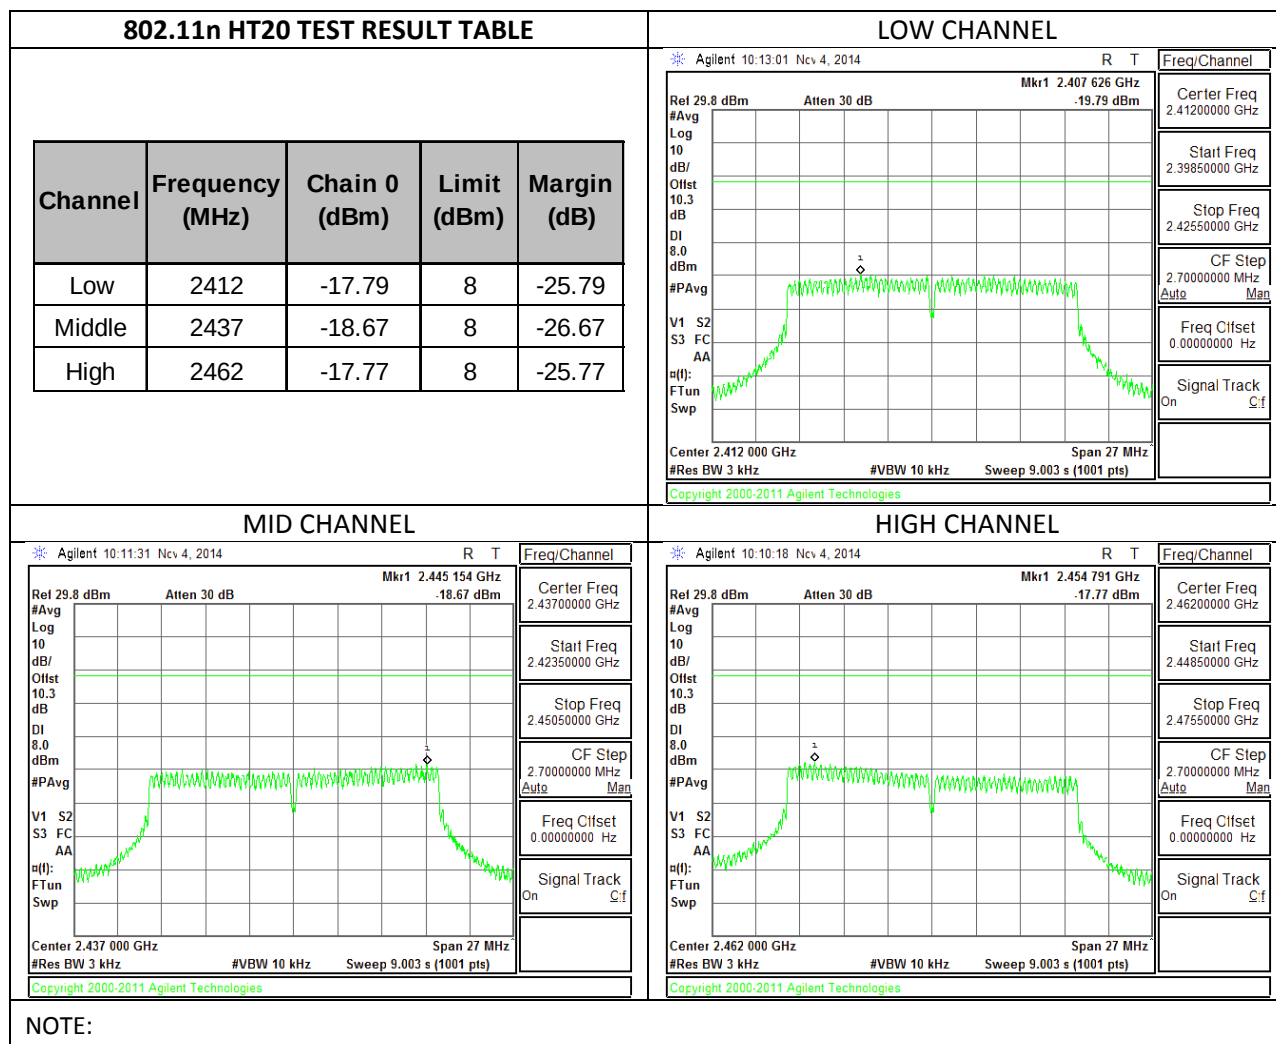

## **10.5. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

### **RESULTS**


# **BANDEDGE AND SPURIOUS EMISSIONS PLOTS**

## **802.11b – CHAIN 0**

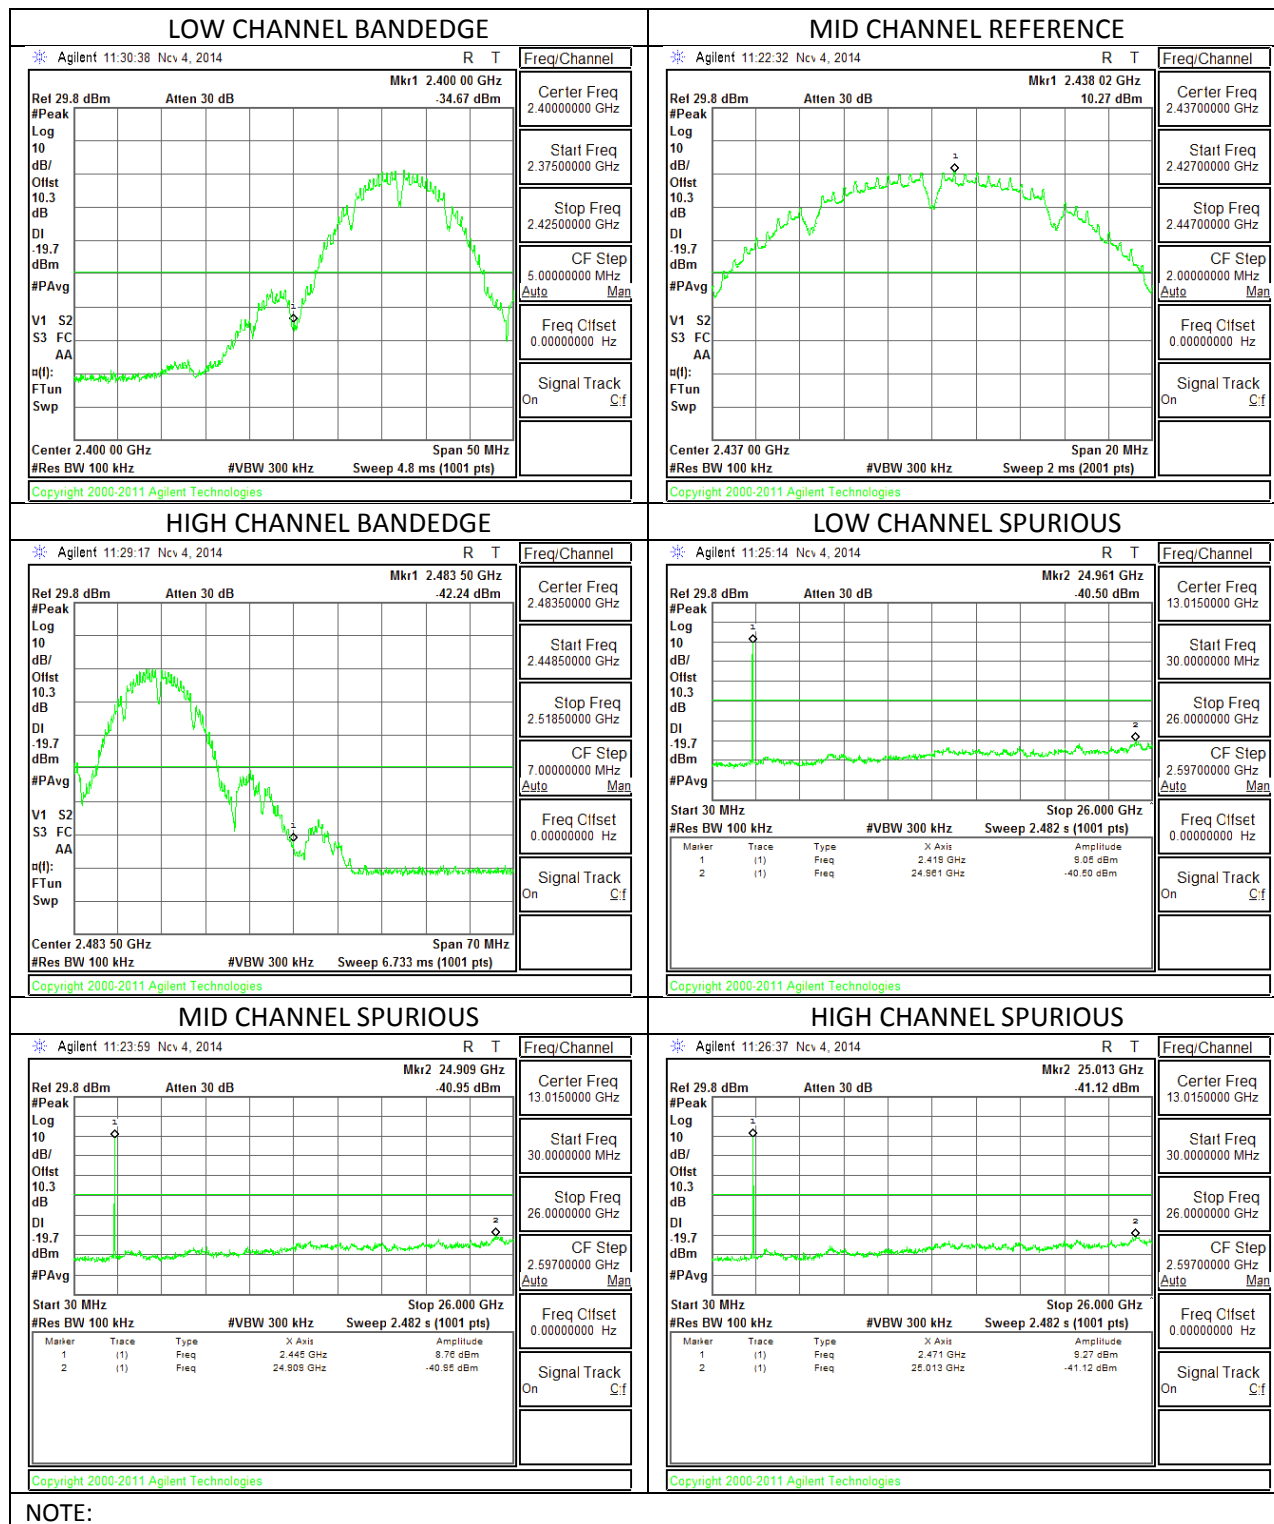


# **BANDEDGE AND SPURIOUS EMISSIONS PLOTS**

## **802.11g – CHAIN 0**

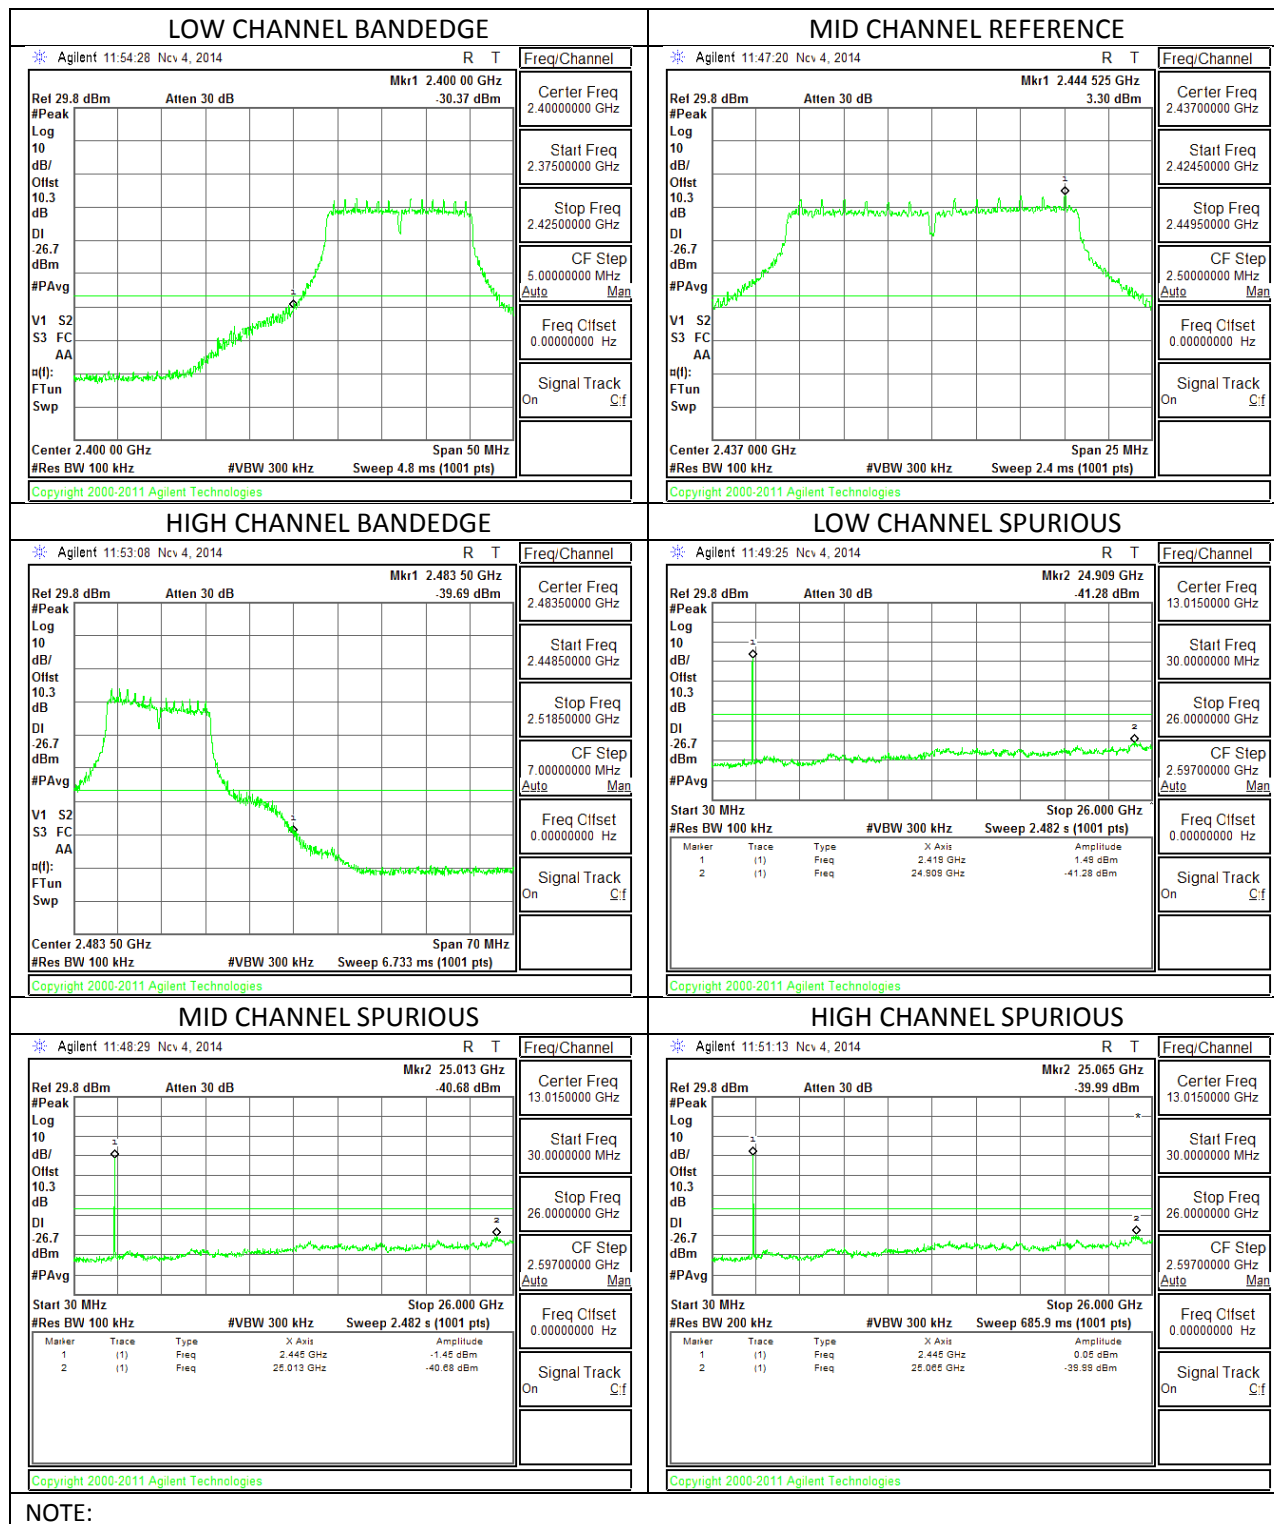

# **BANDEDGE AND SPURIOUS EMISSIONS PLOTS**

## **802.11n HT20 – CHAIN 0**

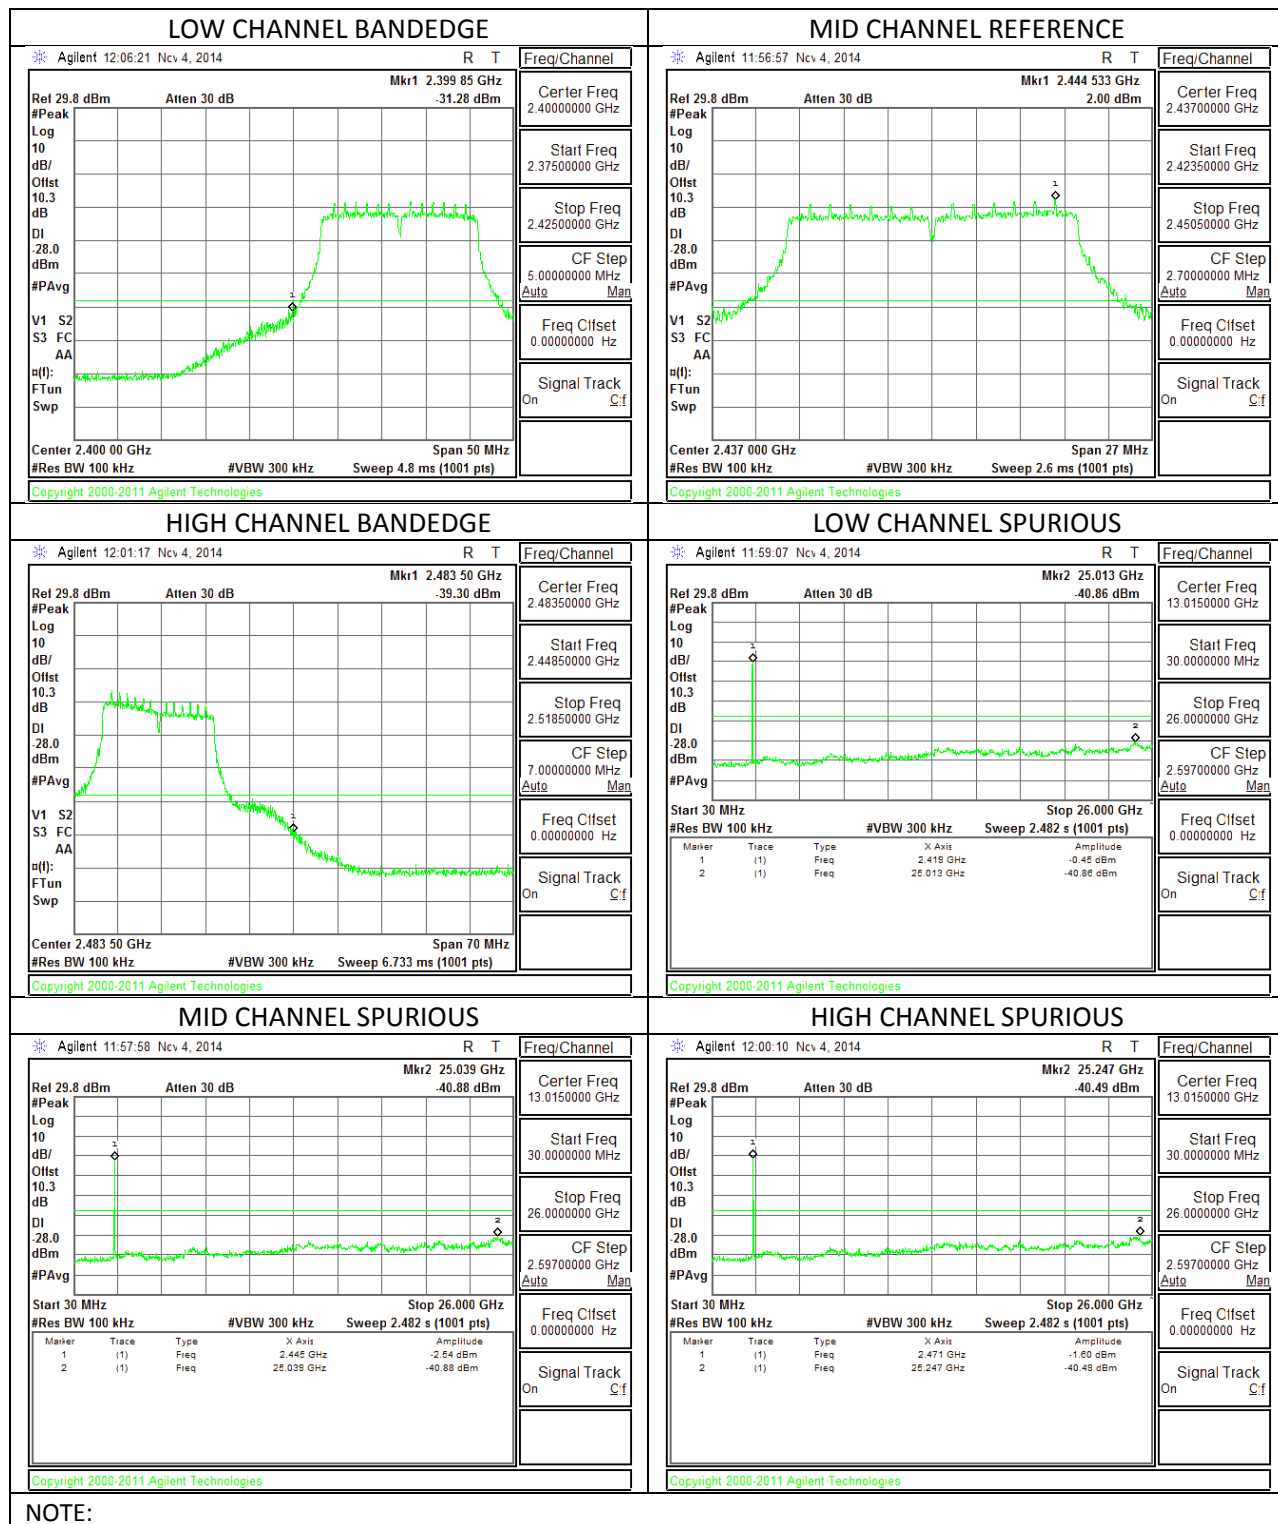

NOTE:

## 11. RADIATED TEST RESULTS

### LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor=  $10\log(1/x)$  For this sample b/g/n mode = 0dB (duty cycle >98%).

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### RESULTS

## 11.1. TRANSMITTER ABOVE 1 GHz

### 802.11b mode

#### RESTRICTED BANDEDGE (LOW CHANNEL)

##### HORIZONTAL PEAK AND AVERAGE PLOT

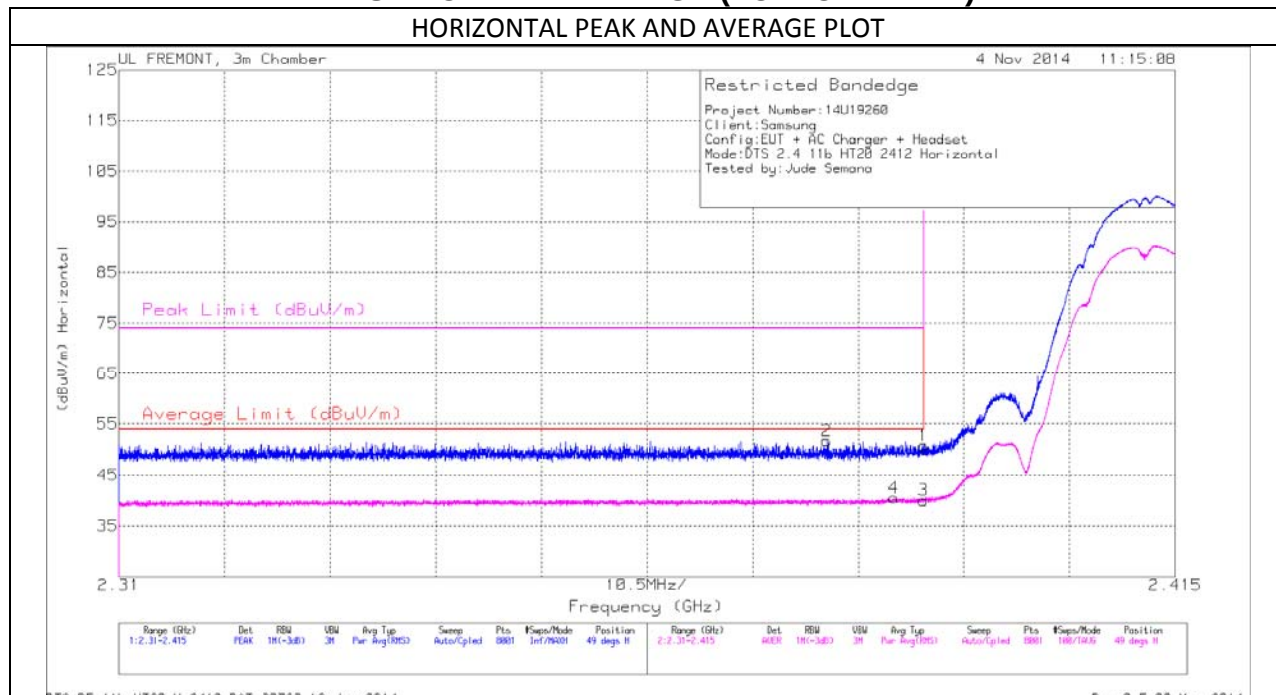

##### HORIZONTAL VERTICAL PEAK AND AVERAGE DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fitter/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | 2.38            | 42.68                | PK  | 32.1           | -23.1                   | 0            | 51.68                      | -                      | -           | 74                  | -22.32         | 49             | 322         | H        |
| 4      | 2.387           | 31.52                | RMS | 32.1           | -23.1                   | 0            | 40.52                      | 54                     | -13.48      | -                   | -              | 49             | 322         | H        |
| 1      | 2.39            | 41.74                | PK  | 32.1           | -23.1                   | 0            | 50.74                      | -                      | -           | 74                  | -23.26         | 49             | 322         | H        |
| 3      | 2.39            | 31.02                | RMS | 32.1           | -23.1                   | 0            | 40.02                      | 54                     | -13.98      | -                   | -              | 49             | 322         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (LOW CHANNEL)

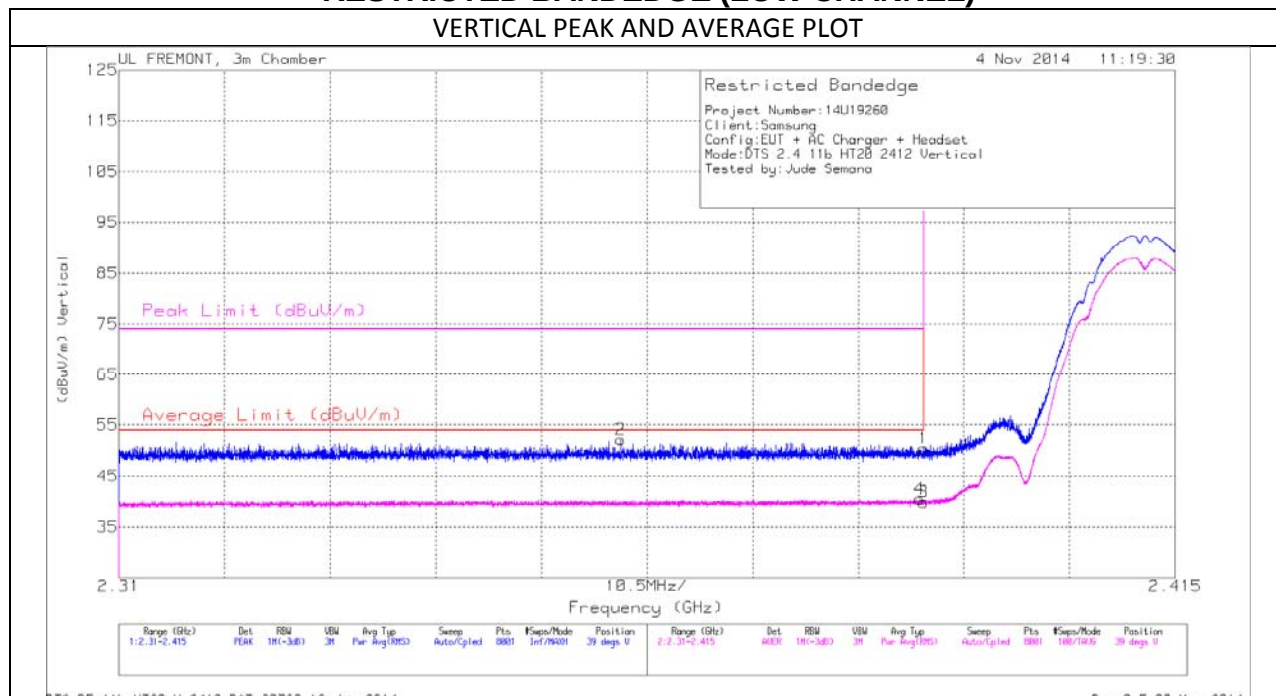

## VERTICAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | 2.36            | 43.23                | PK  | 32             | -23.1                  | 0            | 52.13                      | -                      | -           | 74                  | -21.87         | 39             | 396         | V        |
| 1      | 2.39            | 41.42                | PK  | 32.1           | -23.1                  | 0            | 50.42                      | -                      | -           | 74                  | -23.58         | 39             | 396         | V        |
| 3      | 2.39            | 30.88                | RMS | 32.1           | -23.1                  | 0            | 39.88                      | 54                     | -14.12      | -                   | -              | 39             | 396         | V        |
| 4      | 2.39            | 31.48                | RMS | 32.1           | -23.1                  | 0            | 40.48                      | 54                     | -13.52      | -                   | -              | 39             | 396         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

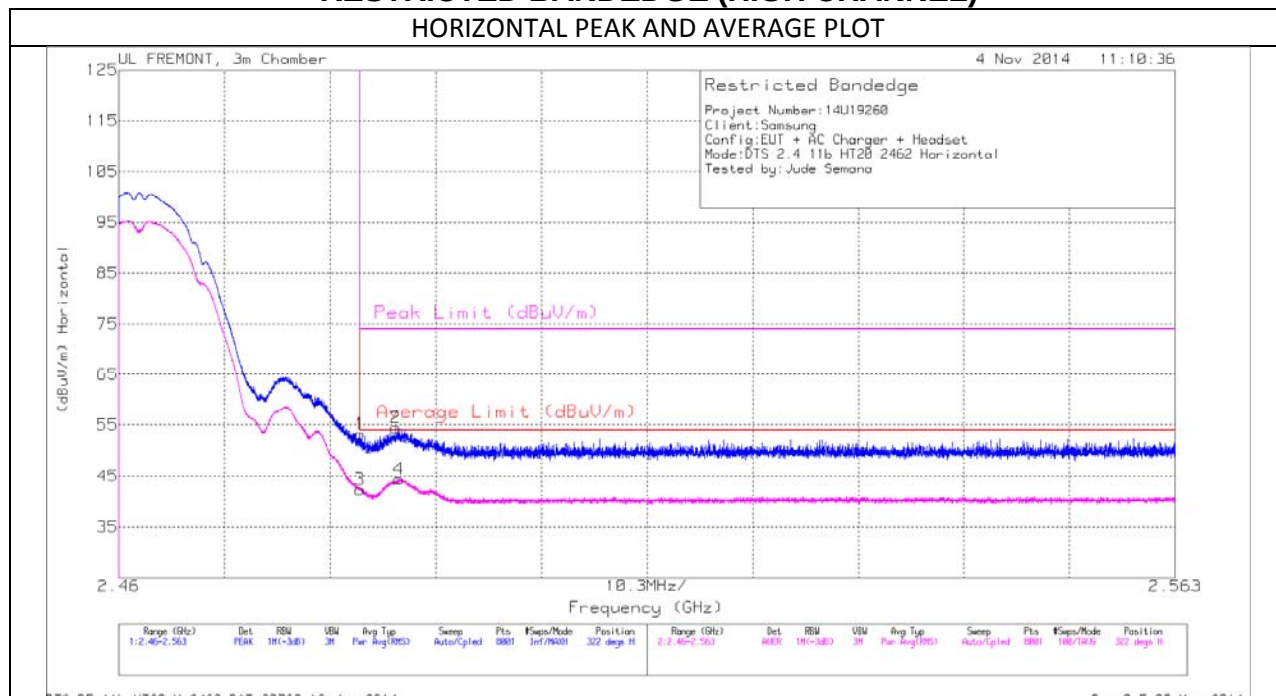

### HORIZONTAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.484           | 43.73                | PK  | 32.3          | -22.8                  | 0            | 53.23                      | -                      | -           | 74                  | -20.77         | 322            | 253         | H        |
| 3      | 2.484           | 32.86                | RMS | 32.3          | -22.8                  | 0            | 42.36                      | 54                     | -11.64      | -                   | -              | 322            | 253         | H        |
| 2      | 2.487           | 44.99                | PK  | 32.3          | -22.8                  | 0            | 54.49                      | -                      | -           | 74                  | -19.51         | 322            | 253         | H        |
| 4      | 2.487           | 34.88                | RMS | 32.3          | -22.8                  | 0            | 44.38                      | 54                     | -9.62       | -                   | -              | 322            | 253         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (HIGH CHANNEL)

### VERTICAL PEAK AND AVERAGE PLOT

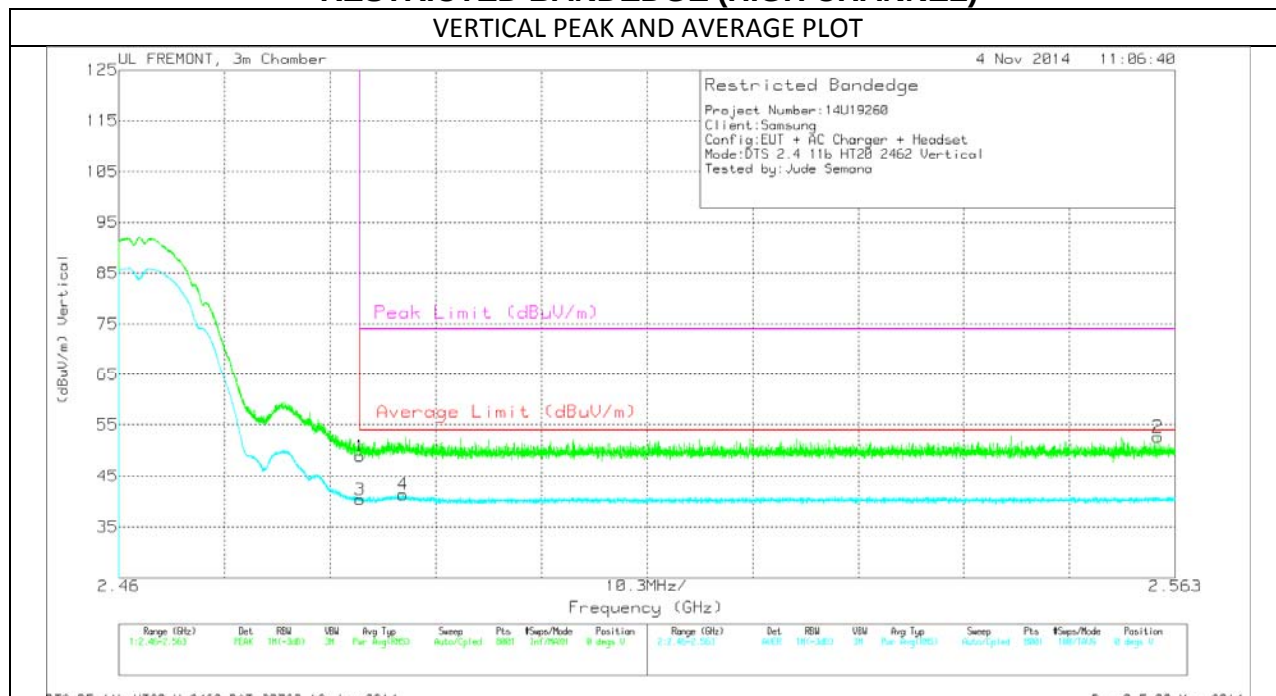

### VERTICAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.484           | 39.38                | PK  | 32.3          | -22.8                  | 0            | 48.88                      | -                      | -           | 74                  | -25.12         | 0              | 116         | V        |
| 3      | 2.484           | 30.87                | RMS | 32.3          | -22.8                  | 0            | 40.37                      | 54                     | -13.63      | -                   | -              | 0              | 116         | V        |
| 4      | 2.488           | 31.84                | RMS | 32.3          | -22.8                  | 0            | 41.34                      | 54                     | -12.66      | -                   | -              | 0              | 116         | V        |
| 2      | 2.561           | 42.94                | PK  | 32.4          | -22.7                  | 0            | 52.64                      | -                      | -           | 74                  | -21.36         | 0              | 116         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


## HARMONICS AND SPURIOUS EMISSIONS

### SPURIOUS (LOW CHANNEL)

#### HORIZONTAL PLOT

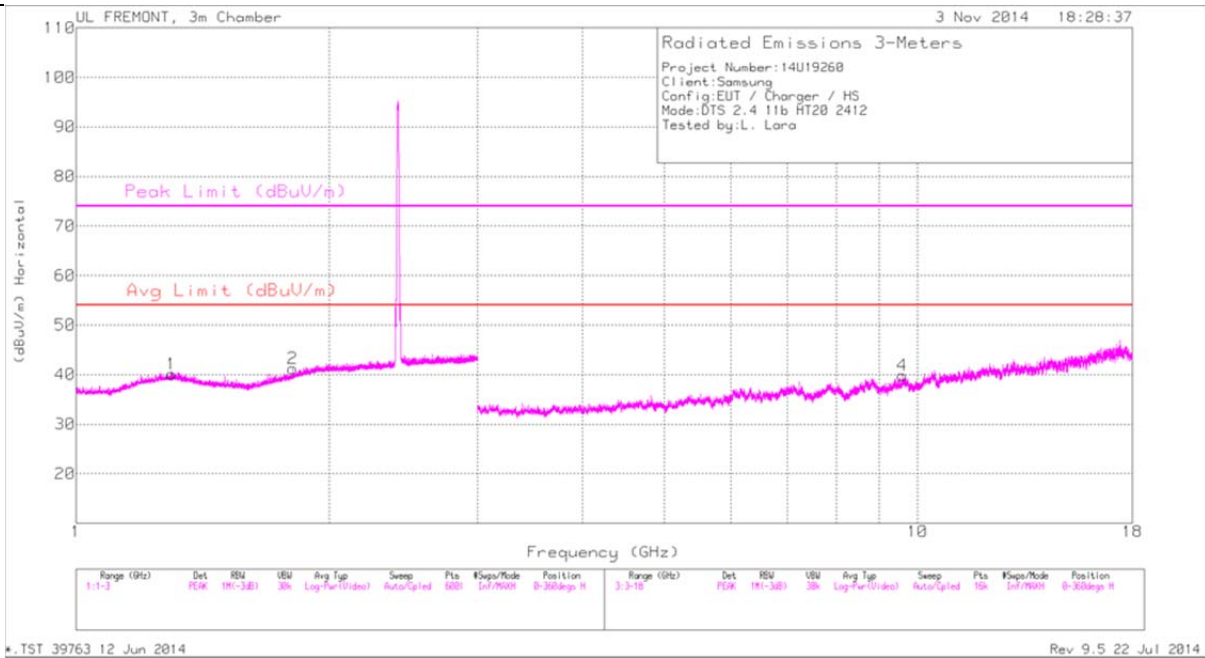

#### VERTICAL PLOT

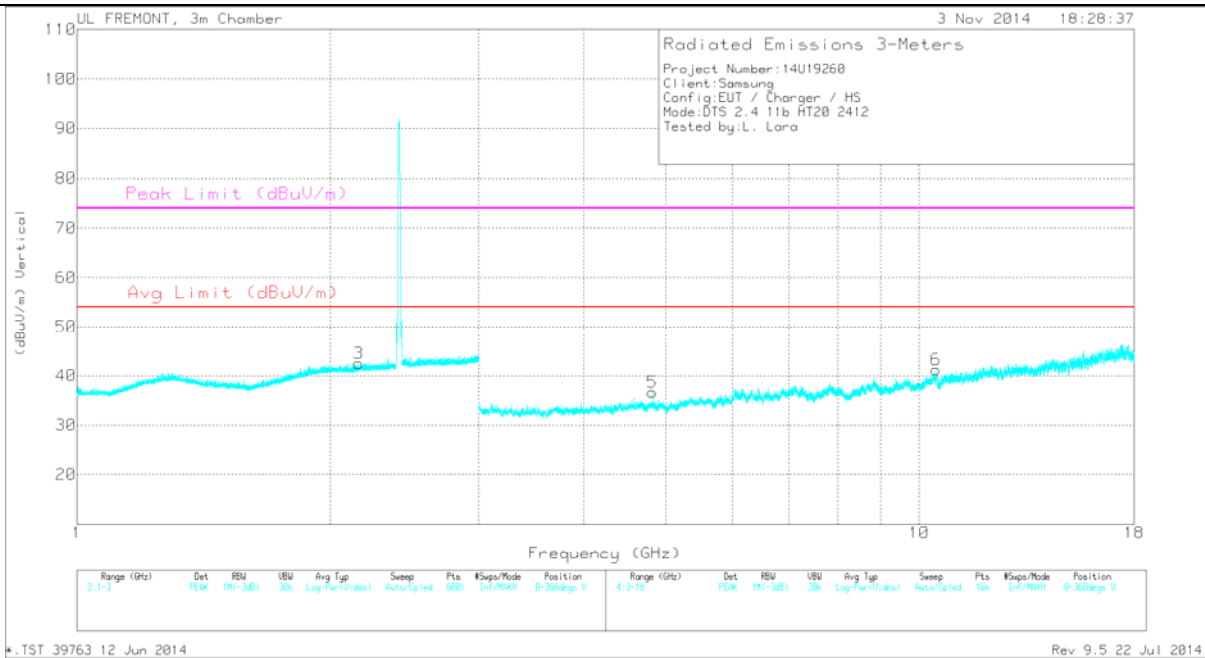

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 1.299           | 33.71                | PK  | 30.2           | -23.8                  | 40.11                      | -                  | -           | 74                  | -33.89         | 0-360          | 200         | H        |
| 2      | 1.81            | 34.29                | PK  | 30.3           | -23.3                  | 41.29                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 3      | 2.158           | 33.86                | PK  | 31.6           | -22.9                  | 42.56                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 5      | 4.823           | 32.95                | PK  | 34             | -30.3                  | 36.65                      | -                  | -           | 74                  | -37.35         | 0-360          | 200         | V        |
| 4      | 9.599           | 28.69                | PK  | 36.7           | -25.6                  | 39.79                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 6      | 10.463          | 28.93                | PK  | 37.4           | -25.1                  | 41.23                      | -                  | -           | -                   | -              | 0-360          | 100         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 4.824           | 41.2                 | PK2  | 34             | -30.3                  | 44.9                       | -                  | -           | 74                  | -29.1          | 360            | 200         | V        |
| 4.824           | 30.84                | MAV1 | 34             | -30.3                  | 34.54                      | 54                 | -19.46      | -                   | -              | 360            | 200         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAV1 - KDB558074 Option 1 Maximum RMS Average

## SPURIOUS (MID CHANNEL)

### HORIZONTAL PLOT

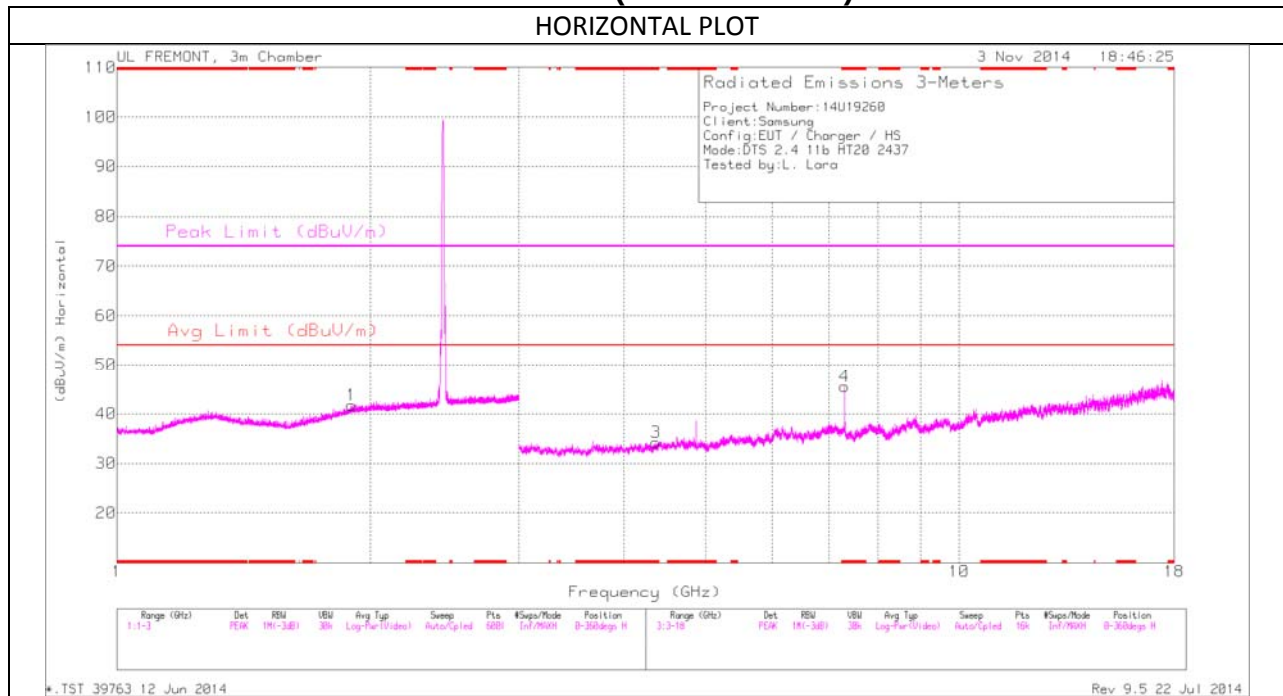

### VERTICAL PLOT

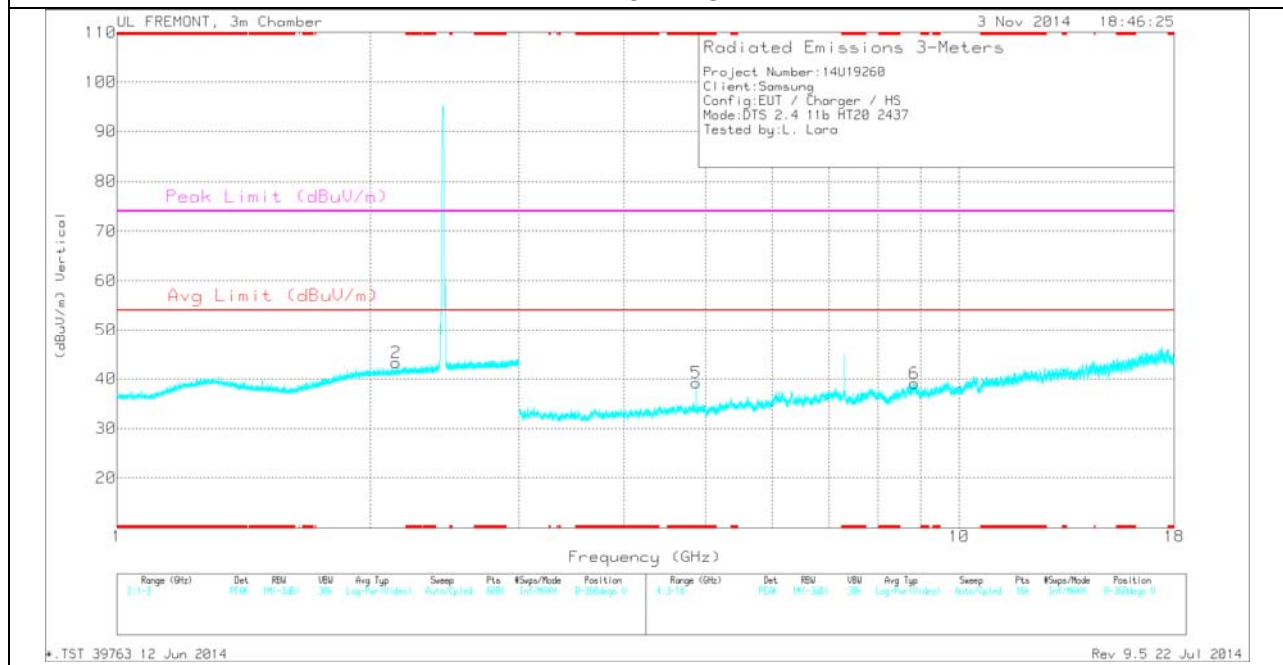

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 3      | * 4.362         | 31.04                | PK  | 33.6           | -30.4                  | 34.24                      | -                  | -           | 74                  | -39.76         | 0-360          | 100         | H        |
| 4      | * 7.311         | 38.53                | PK  | 35.6           | -28.6                  | 45.53                      | -                  | -           | 74                  | -28.47         | 0-360          | 200         | H        |
| 5      | * 4.874         | 35.35                | PK  | 34             | -30.1                  | 39.25                      | -                  | -           | 74                  | -34.75         | 0-360          | 200         | V        |
| 1      | 1.9             | 33.81                | PK  | 31.2           | -23.3                  | 41.71                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 2      | 2.146           | 34.67                | PK  | 31.6           | -23                    | 43.27                      | -                  | -           | -                   | -              | 0-360          | 100         | V        |
| 6      | 8.84            | 29.71                | PK  | 36             | -26.6                  | 39.11                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 7.313         | 40.71                | PK2  | 35.6           | -28.6                  | 47.71                      | -                  | -           | 74                  | -26.29         | 360            | 200         | H        |
| * 7.312         | 30.85                | MAV1 | 35.6           | -28.6                  | 37.85                      | 54                 | -16.15      | -                   | -              | 360            | 200         | H        |
| * 4.873         | 40.79                | PK2  | 34             | -30.1                  | 44.69                      | -                  | -           | 74                  | -29.31         | 360            | 200         | V        |
| * 4.874         | 30.77                | MAV1 | 34             | -30.1                  | 34.67                      | 54                 | -19.33      | -                   | -              | 360            | 200         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAV1 - KDB558074 Option 1 Maximum RMS Average

## SPURIOUS (HIGH CHANNEL)

### HORIZONTAL PLOT

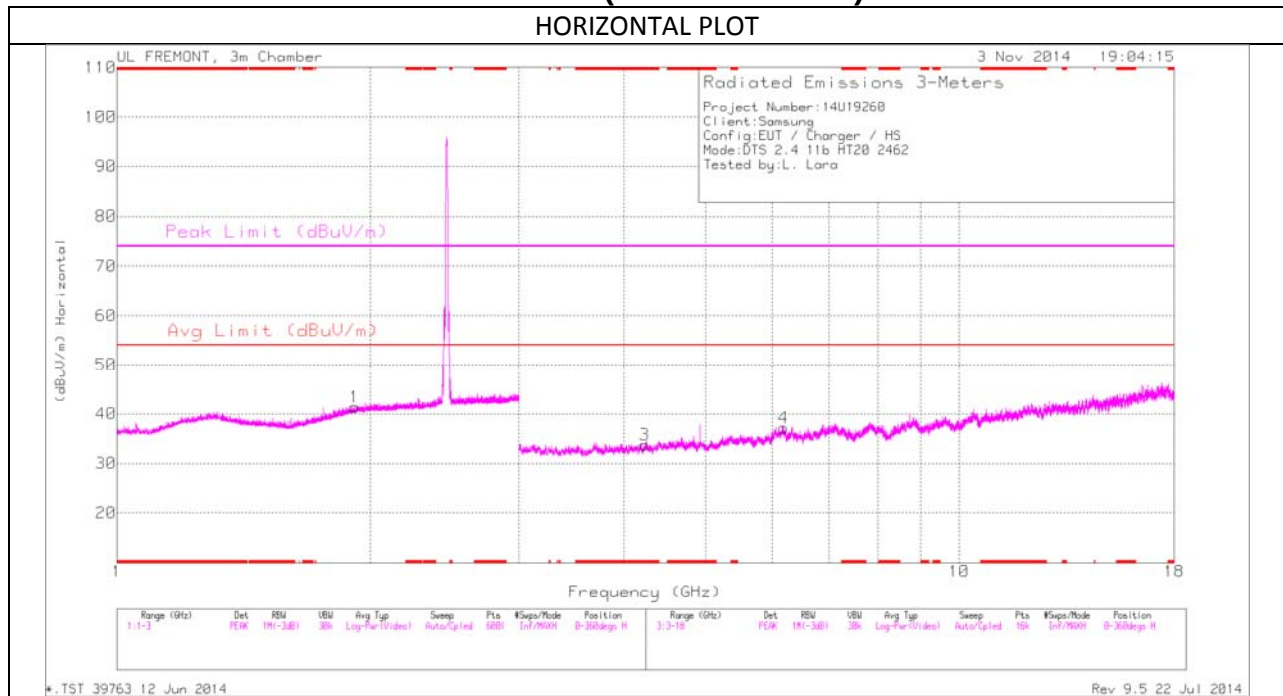

### VERTICAL PLOT

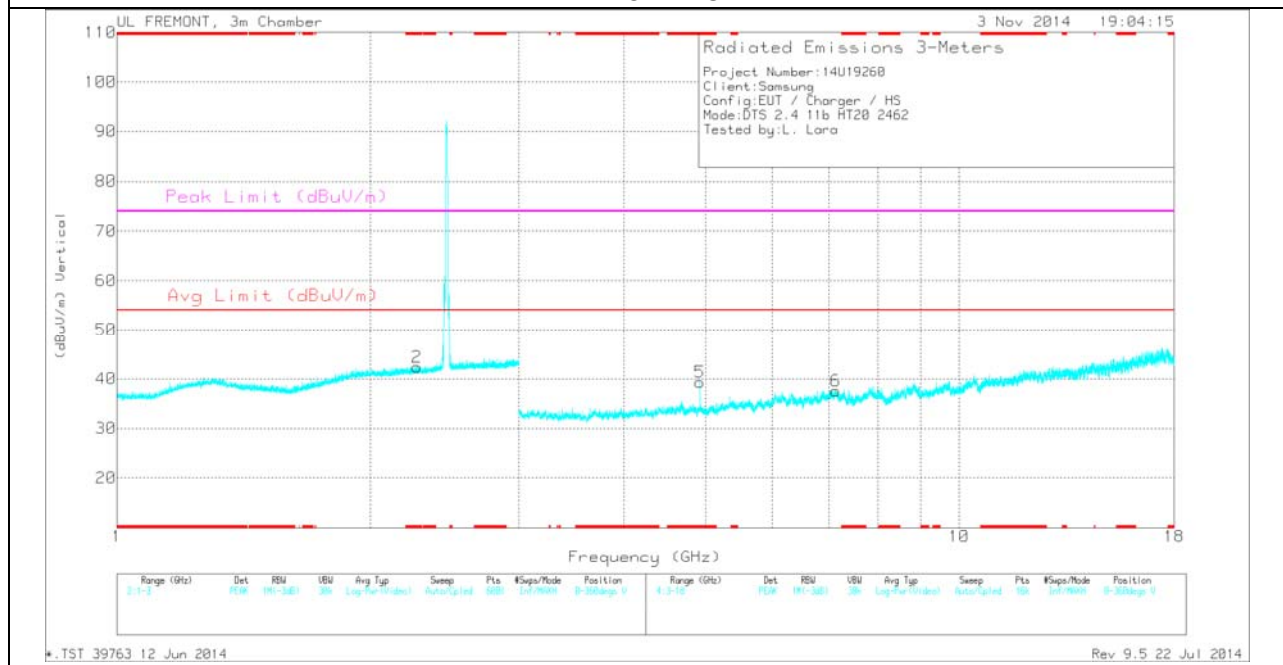

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.271         | 33.54                | PK  | 31.8           | -23                    | 42.34                      | -                  | -           | 74                  | -31.66         | 0-360          | 100         | V        |
| 3      | * 4.231         | 31.16                | PK  | 33.5           | -30.9                  | 33.76                      | -                  | -           | 74                  | -40.24         | 0-360          | 100         | H        |
| 5      | * 4.924         | 35.69                | PK  | 34             | -30.4                  | 39.29                      | -                  | -           | 74                  | -34.71         | 0-360          | 200         | V        |
| 1      | 1.914           | 33.37                | PK  | 31.3           | -23.3                  | 41.37                      | -                  | -           | -                   | -              | 0-360          | 200         | H        |
| 4      | 6.188           | 31.98                | PK  | 35.3           | -30.1                  | 37.18                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 6      | 7.141           | 30.2                 | PK  | 35.6           | -28.2                  | 37.6                       | -                  | -           | -                   | -              | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.924         | 42.88                | PK2  | 34             | -30.4                  | 46.48                      | -                  | -           | 74                  | -27.52         | 360            | 200         | V        |
| * 4.924         | 34.16                | MAv1 | 34             | -30.4                  | 37.76                      | 54                 | -16.24      | -                   | -              | 360            | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

**802.11g mode**

**RESTRICTED BANDEDGE (LOW CHANNEL)**

**HORIZONTAL PEAK AND AVERAGE PLOT**

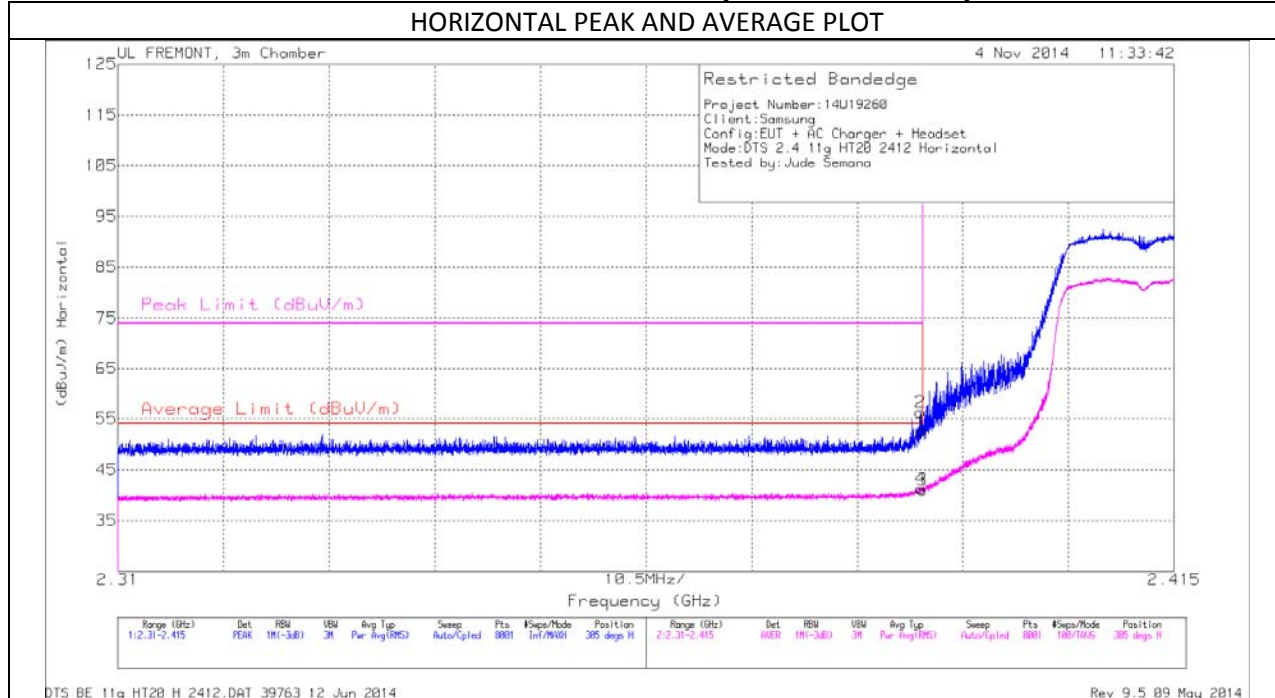

**HORIZONTAL VERTICAL PEAK AND AVERAGE DATA**


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.39            | 43.7                 | PK  | 32.1          | -23.1                  | 0            | 52.7                       | -                      | -           | 74                  | -21.3          | 305            | 103         | H        |
| 2      | 2.39            | 47.26                | PK  | 32.1          | -23.1                  | 0            | 56.26                      | -                      | -           | 74                  | -17.74         | 305            | 103         | H        |
| 3      | 2.39            | 32.01                | RMS | 32.1          | -23.1                  | 0.32         | 41.01                      | 54                     | -12.99      | -                   | -              | 305            | 103         | H        |
| 4      | 2.39            | 32.29                | RMS | 32.1          | -23.1                  | 0.32         | 41.29                      | 54                     | -12.71      | -                   | -              | 305            | 103         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (LOW CHANNEL)

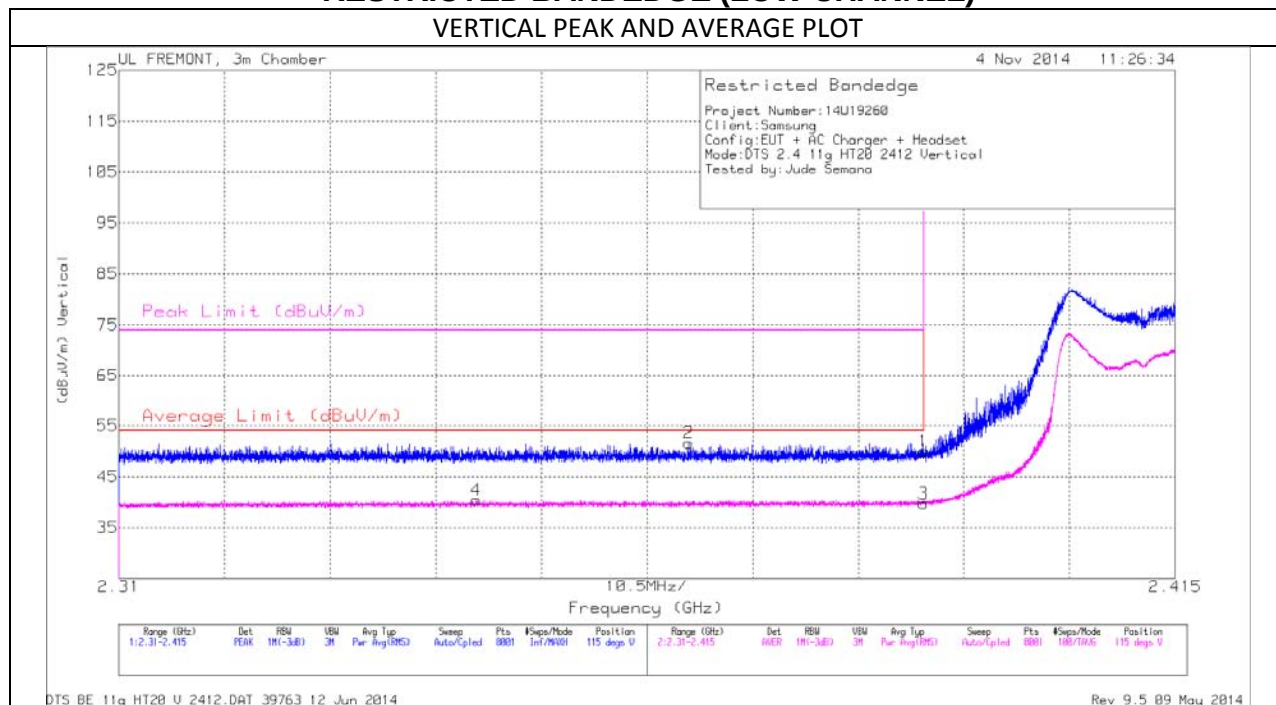

## VERTICAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 4      | 2.346           | 31.5                 | RMS | 32             | -23.1                  | 0.32         | 40.4                       | 54                     | -13.6       | -                   | -              | 115            | 148         | V        |
| 2      | 2.367           | 42.71                | PK  | 32             | -23.1                  | 0            | 51.61                      | -                      | -           | 74                  | -22.39         | 115            | 148         | V        |
| 1      | 2.39            | 41                   | PK  | 32.1           | -23.1                  | 0            | 50                         | -                      | -           | 74                  | -24            | 115            | 148         | V        |
| 3      | 2.39            | 30.68                | RMS | 32.1           | -23.1                  | 0.32         | 39.68                      | 54                     | -14.32      | -                   | -              | 115            | 148         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

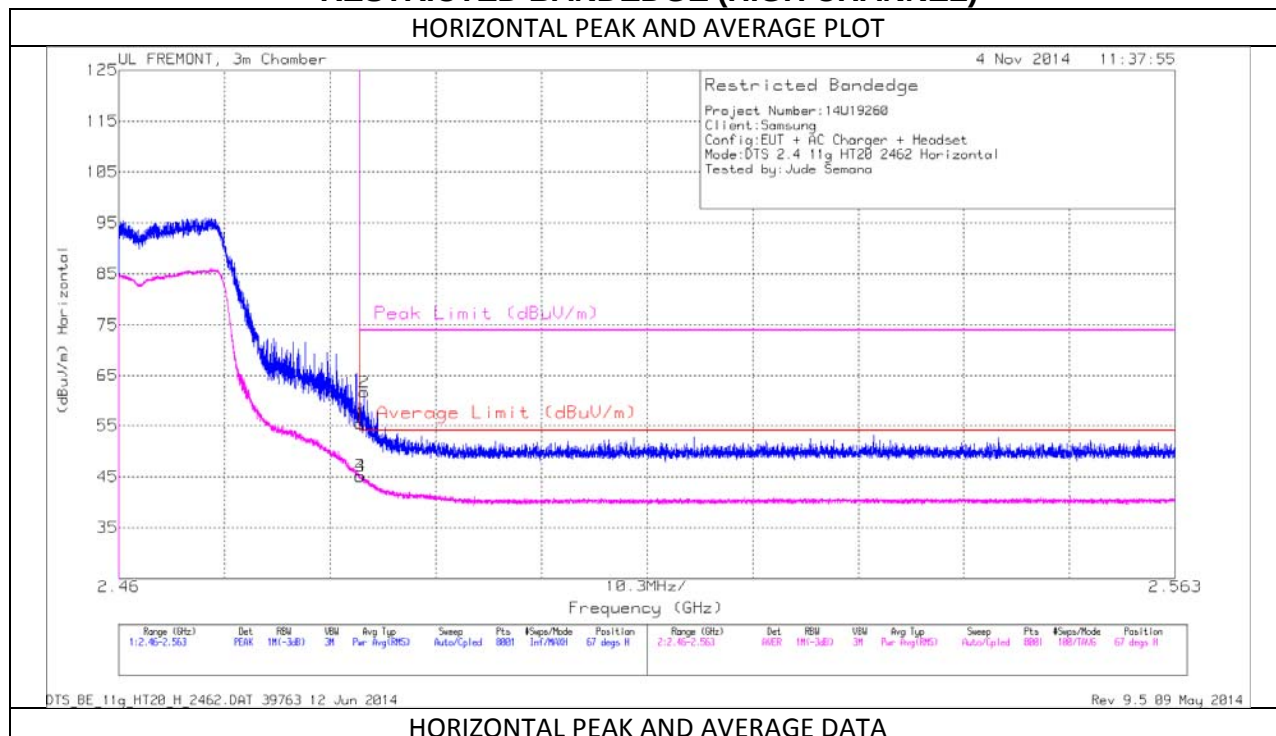

### HORIZONTAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Flt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.484           | 45.91                | PK  | 32.3           | -22.8                 | 0            | 55.41                      | -                      | -           | 74                  | -18.59         | 67             | 103         | H        |
| 2      | 2.484           | 52.17                | PK  | 32.3           | -22.8                 | 0            | 61.67                      | -                      | -           | 74                  | -12.33         | 67             | 103         | H        |
| 3      | 2.484           | 35.58                | RMS | 32.3           | -22.8                 | 0.32         | 45.08                      | 54                     | -8.92       | -                   | -              | 67             | 103         | H        |
| 4      | 2.484           | 35.58                | RMS | 32.3           | -22.8                 | 0.32         | 45.08                      | 54                     | -8.92       | -                   | -              | 67             | 103         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (HIGH CHANNEL)

### VERTICAL PEAK AND AVERAGE PLOT

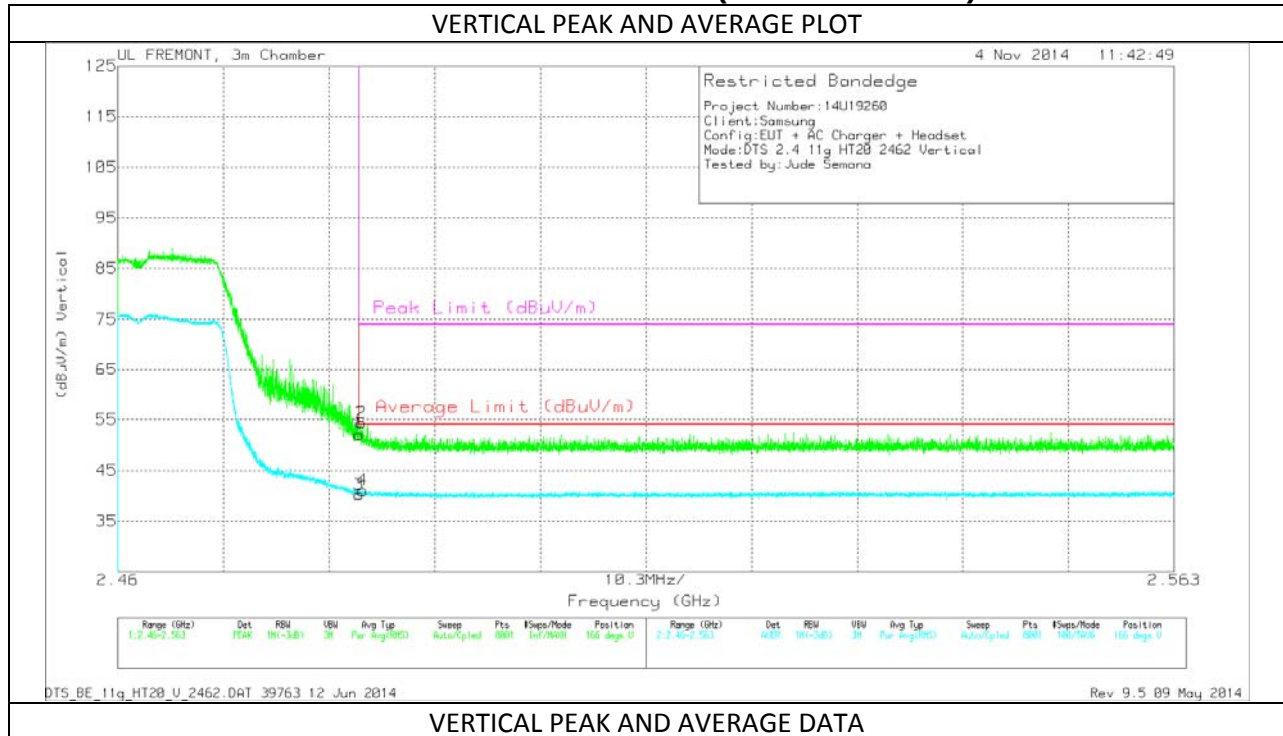

### VERTICAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.484           | 42.53                | PK  | 32.3           | -22.8                  | 0            | 52.03                      | -                      | -           | 74                  | -21.97         | 166            | 260         | V        |
| 2      | 2.484           | 44.89                | PK  | 32.3           | -22.8                  | 0            | 54.39                      | -                      | -           | 74                  | -19.61         | 166            | 260         | V        |
| 3      | 2.484           | 30.75                | RMS | 32.3           | -22.8                  | 0.32         | 40.25                      | 54                     | -13.75      | -                   | -              | 166            | 260         | V        |
| 4      | 2.484           | 31.58                | RMS | 32.3           | -22.8                  | 0.32         | 41.08                      | 54                     | -12.92      | -                   | -              | 166            | 260         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


## HARMONICS AND SPURIOUS EMISSIONS

### SPURIOUS (LOW CHANNEL)

#### HORIZONTAL PLOT

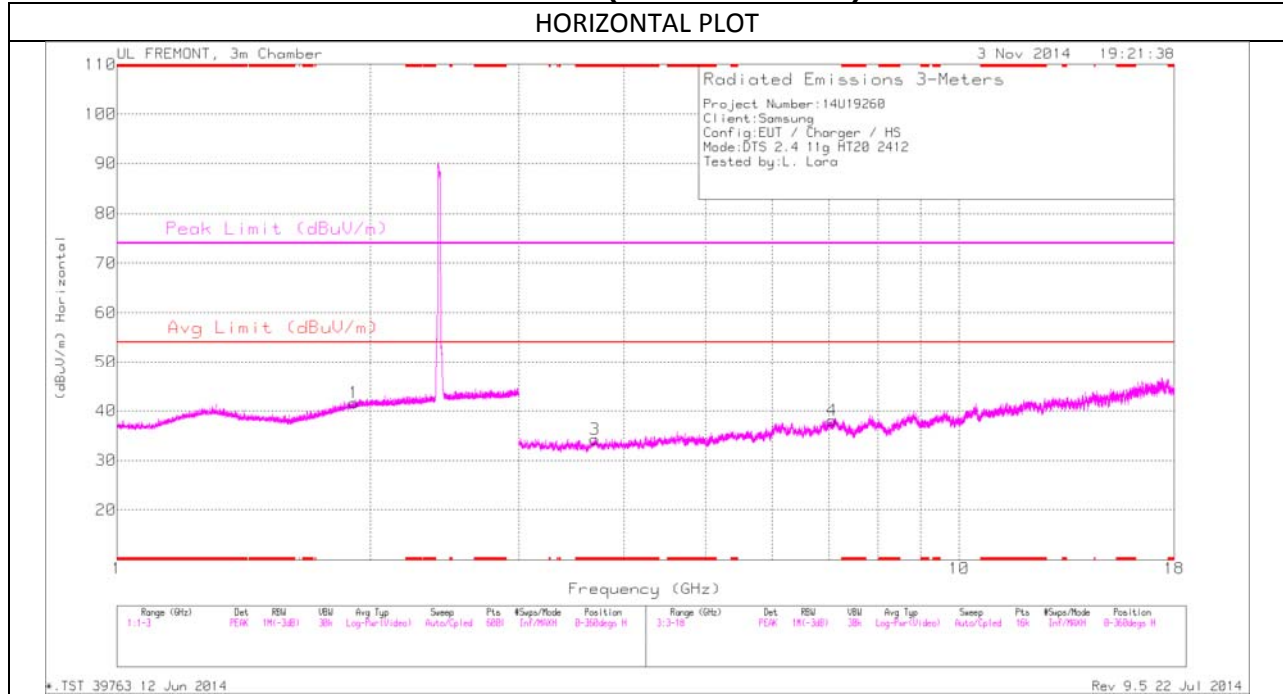

#### VERTICAL PLOT

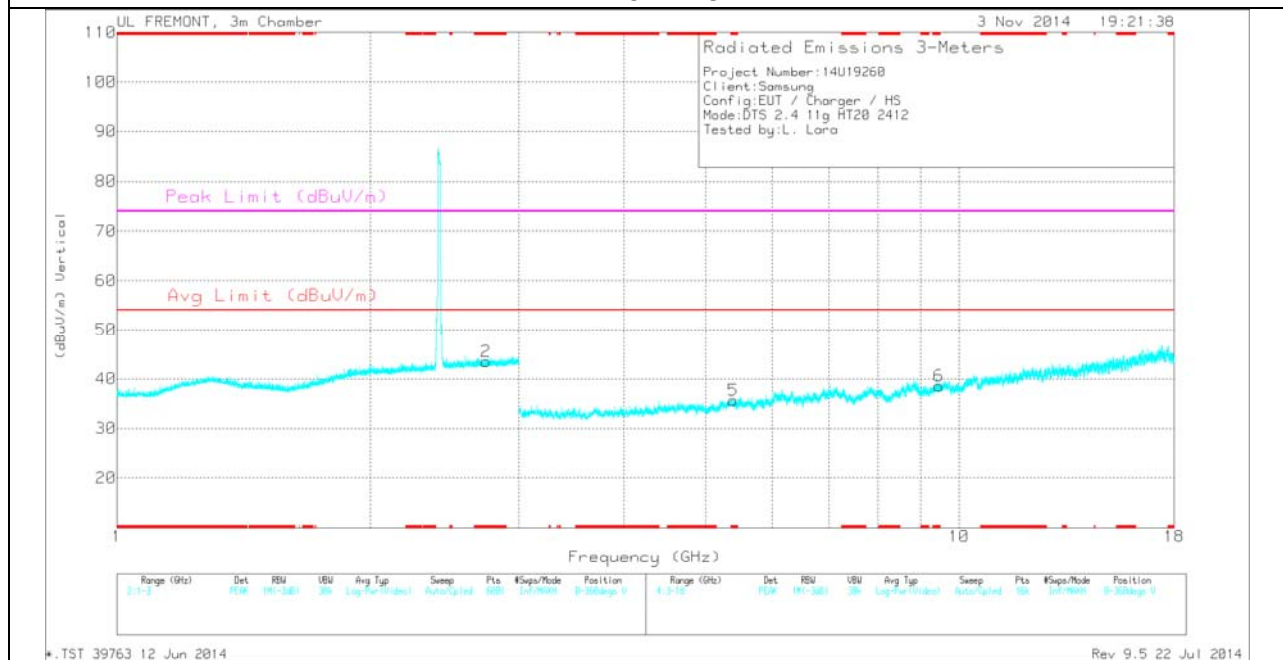

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.742         | 33.16                | PK  | 32.7           | -22.8                  | 0            | 43.48                      | -                  | -           | 74                  | -30.52         | 0-360          | 200         | V        |
| 3      | * 3.691         | 31.39                | PK  | 33.2           | -30.8                  | 0            | 34.21                      | -                  | -           | 74                  | -39.79         | 0-360          | 100         | H        |
| 5      | * 5.389         | 31.28                | PK  | 34.6           | -30.6                  | 0            | 35.7                       | -                  | -           | 74                  | -38.3          | 0-360          | 200         | V        |
| 6      | * 9.465         | 27.7                 | PK  | 36.5           | -26                    | 0            | 38.62                      | -                  | -           | 74                  | -35.38         | 0-360          | 100         | V        |
| 1      | 1.913           | 33.16                | PK  | 31.3           | -23.3                  | 0            | 41.58                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 4      | 7.059           | 30.45                | PK  | 35.6           | -28.4                  | 0            | 38.07                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.742         | 33.16                | PK  | 32.7           | -22.8                  | 0            | 43.48                      | -                  | -           | 74                  | -30.52         | 0-360          | 200         | V        |
| 3      | * 3.691         | 31.39                | PK  | 33.2           | -30.8                  | 0            | 34.21                      | -                  | -           | 74                  | -39.79         | 0-360          | 100         | H        |
| 5      | * 5.389         | 31.28                | PK  | 34.6           | -30.6                  | 0            | 35.7                       | -                  | -           | 74                  | -38.3          | 0-360          | 200         | V        |
| 6      | * 9.465         | 27.7                 | PK  | 36.5           | -26                    | 0            | 38.62                      | -                  | -           | 74                  | -35.38         | 0-360          | 100         | V        |
| 1      | 1.913           | 33.16                | PK  | 31.3           | -23.3                  | 0            | 41.58                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 4      | 7.059           | 30.45                | PK  | 35.6           | -28.4                  | 0            | 38.07                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## SPURIOUS (MID CHANNEL)

### HORIZONTAL PLOT

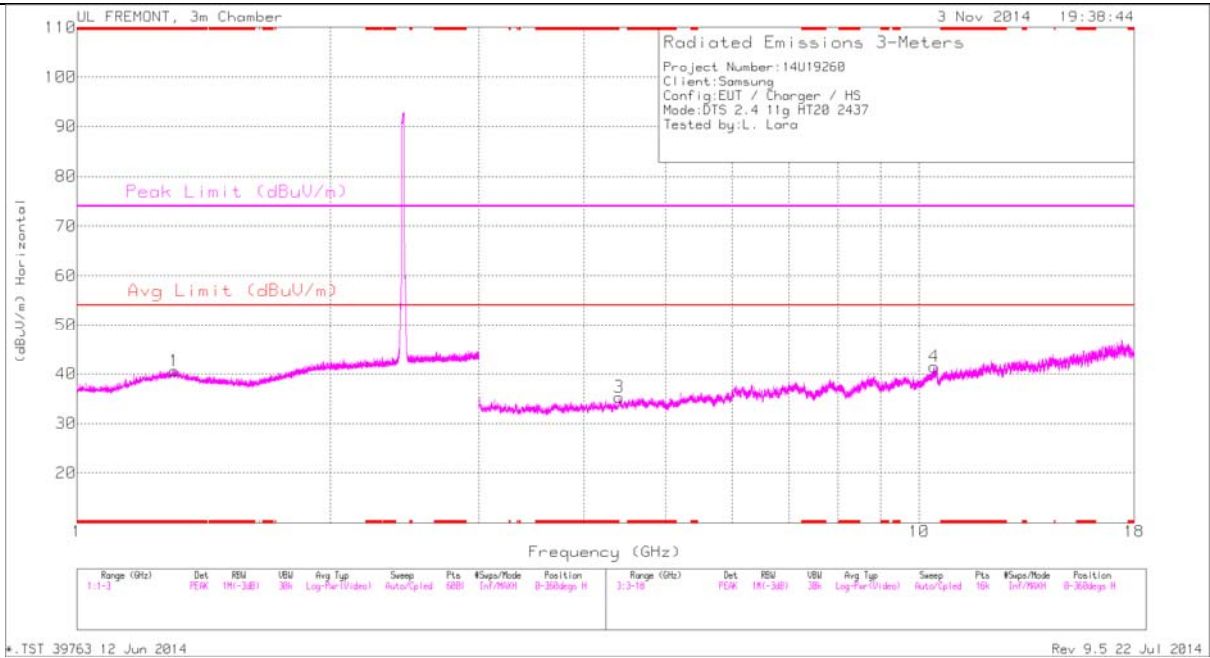

### VERTICAL PLOT

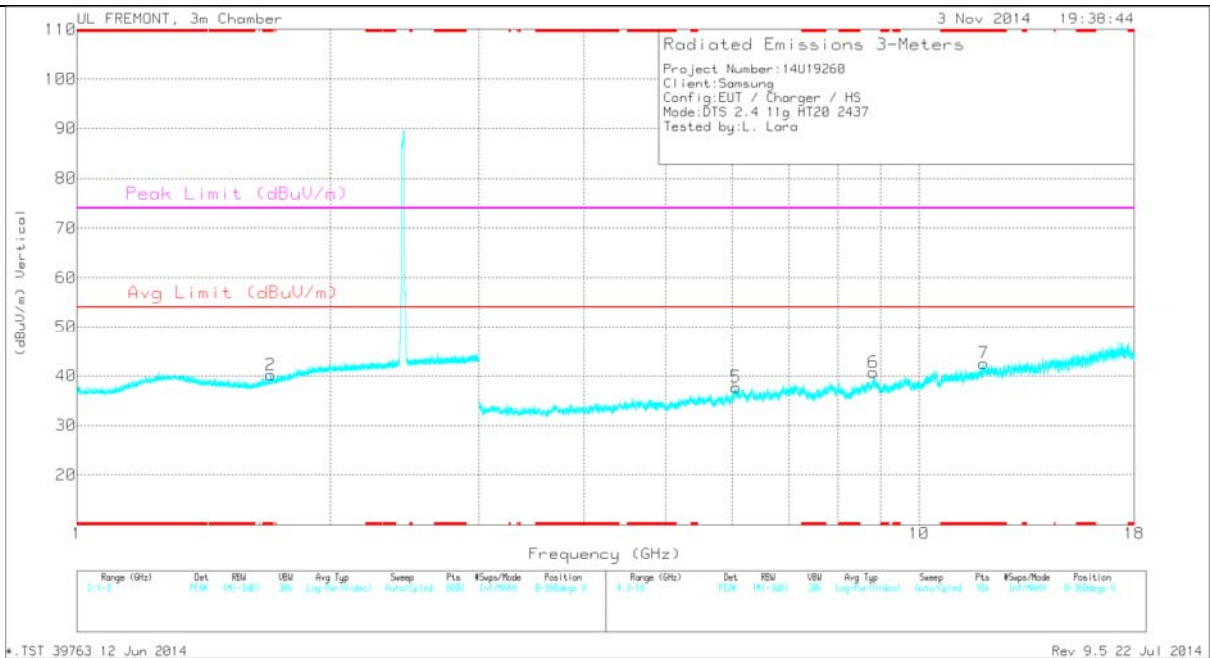

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.305         | 33.73                | PK  | 30.2           | -23.8                 | 0            | 40.55                      | -                  | -           | 74                  | -33.45         | 0-360          | 100         | H        |
| 2      | * 1.697         | 34.22                | PK  | 29             | -23.4                 | 0            | 40.24                      | -                  | -           | 74                  | -33.76         | 0-360          | 200         | V        |
| 7      | * 11.934        | 29.25                | PK  | 39             | -26.1                 | 0            | 42.57                      | -                  | -           | 74                  | -31.43         | 0-360          | 200         | V        |
| 3      | 4.403           | 31.31                | PK  | 33.7           | -30.1                 | 0            | 35.33                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 5      | 6.055           | 31.12                | PK  | 35.3           | -29.1                 | 0            | 37.74                      | -                  | -           | -                   | -              | 0-360          | 100         | V        |
| 6      | 8.823           | 30.85                | PK  | 36             | -26.6                 | 0            | 40.67                      | -                  | -           | -                   | -              | 0-360          | 100         | V        |
| 4      | 10.411          | 28.71                | PK  | 37.4           | -25.1                 | 0            | 41.43                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 11.935        | 38.2                 | PK2  | 39             | -26.1                 | 0            | 51.52                      | -                  | -           | 74                  | -22.48         | 228            | 200         | V        |
| * 11.934        | 26.8                 | MAV1 | 39             | -26.1                 | 0.32         | 39.7                       | 54                 | -14.3       | -                   | -              | 228            | 200         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## SPURIOUS (HIGH CHANNEL)

### HORIZONTAL PLOT

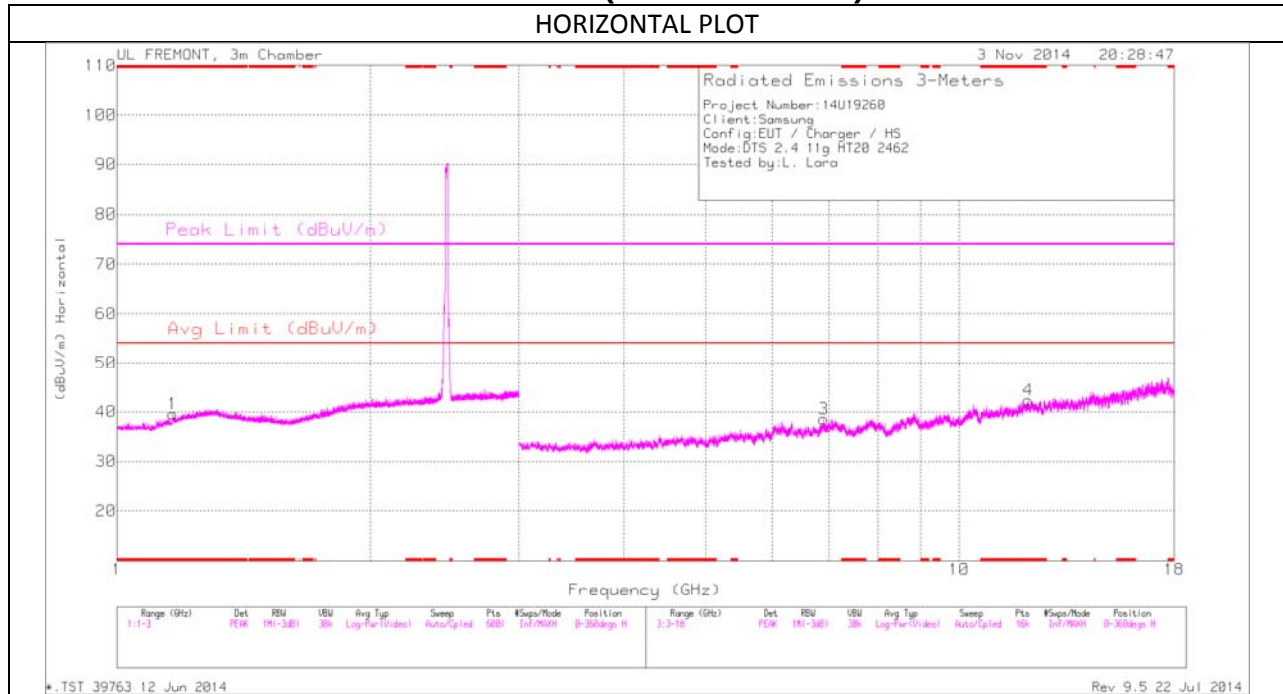

### VERTICAL PLOT

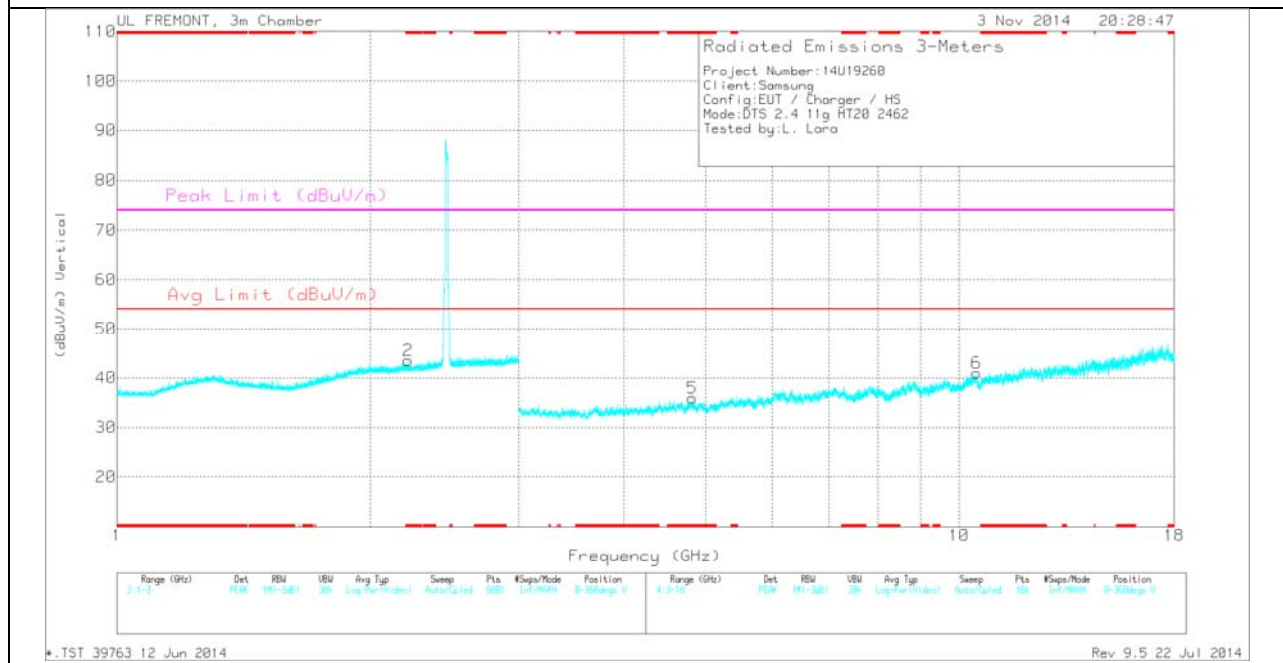

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Filtr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.166         | 34.42                | PK  | 28.6           | -23.8                   | 0            | 39.64                      | -                  | -           | 74                  | -34.36         | 0-360          | 200         | H        |
| 2      | * 2.217         | 34.26                | PK  | 31.7           | -22.9                   | 0            | 43.48                      | -                  | -           | 74                  | -30.52         | 0-360          | 200         | V        |
| 4      | * 12.083        | 29.22                | PK  | 39.1           | -26.4                   | 0            | 42.34                      | -                  | -           | 74                  | -31.66         | 0-360          | 200         | H        |
| 5      | * 4.821         | 31.8                 | PK  | 34             | -30.3                   | 0            | 35.92                      | -                  | -           | 74                  | -38.08         | 0-360          | 200         | V        |
| 3      | 6.902           | 31.07                | PK  | 35.6           | -28.5                   | 0            | 38.59                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 6      | 10.493          | 28.66                | PK  | 37.5           | -25.6                   | 0            | 40.98                      | -                  | -           | -                   | -              | 0-360          | 100         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filtr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.821         | 40.69                | PK2  | 34             | -30.3                   | 0            | 44.81                      | -                  | -           | 74                  | -29.19         | 139            | 195         | V        |
| * 4.82          | 28.5                 | MAV1 | 34             | -30.3                   | 0.32         | 32.2                       | 54                 | -21.8       | -                   | -              | 139            | 195         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**802.11n HT20 mode**

**RESTRICTED BANDEDGE (LOW CHANNEL)**

**HORIZONTAL PEAK AND AVERAGE PLOT**

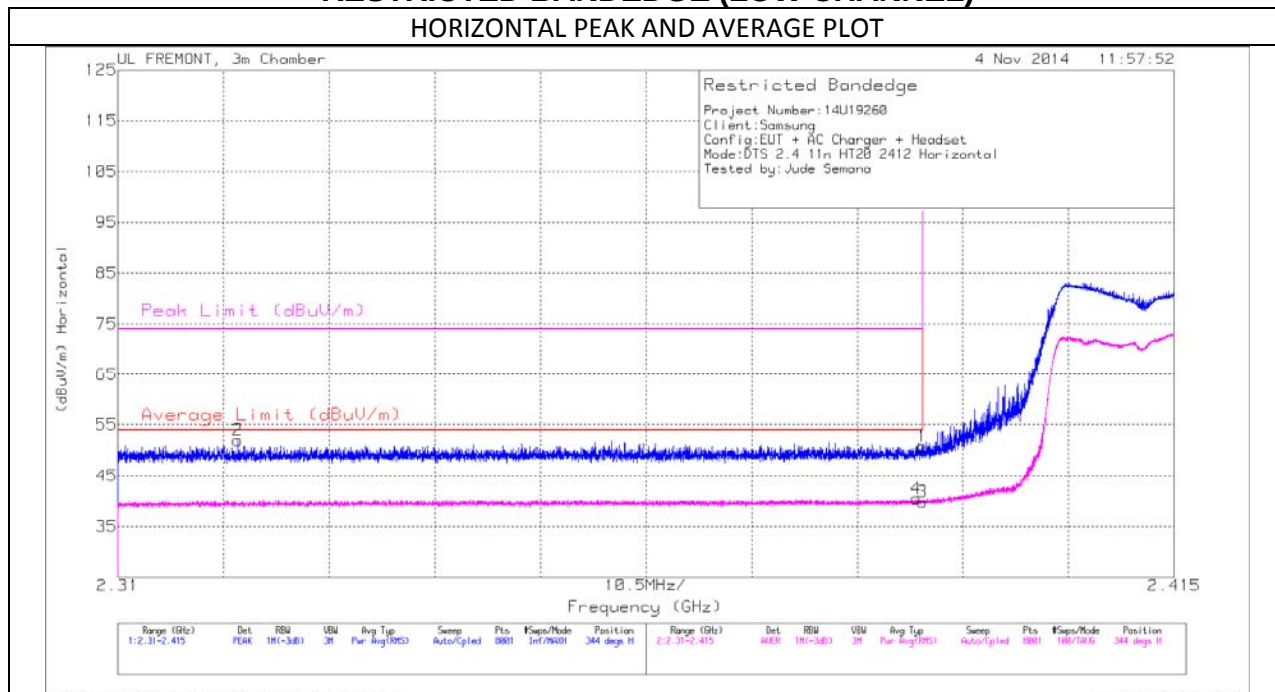

**HORIZONTAL VERTICAL PEAK AND AVERAGE DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | 2.322           | 43.17                | PK  | 31.9           | -23.1                  | 0            | 51.97                      | -                      | -           | 74                  | -22.03         | 344            | 222         | H        |
| 4      | 2.389           | 31.5                 | RMS | 32.1           | -23.1                  | 0.32         | 40.5                       | 54                     | -13.5       | -                   | -              | 344            | 222         | H        |
| 1      | 2.39            | 41.8                 | PK  | 32.1           | -23.1                  | 0            | 50.8                       | -                      | -           | 74                  | -23.2          | 344            | 222         | H        |
| 3      | 2.39            | 30.82                | RMS | 32.1           | -23.1                  | 0.32         | 39.82                      | 54                     | -14.18      | -                   | -              | 344            | 222         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (LOW CHANNEL)

### VERTICAL PEAK AND AVERAGE PLOT

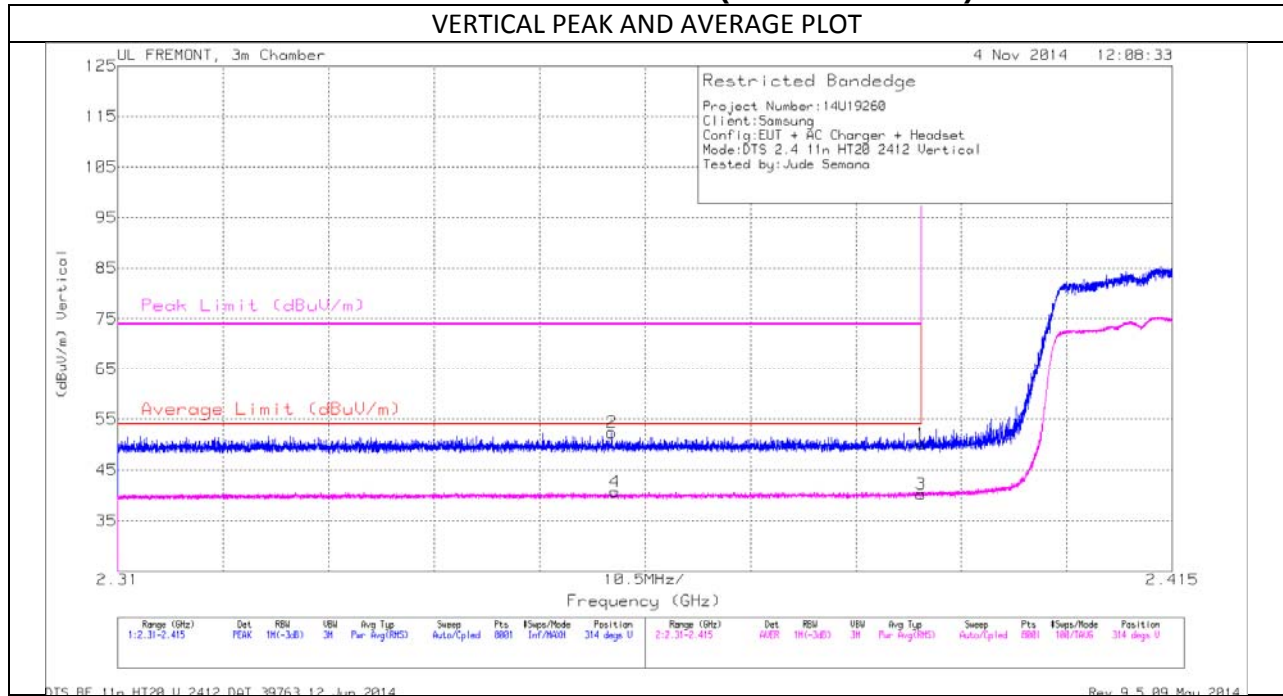

### VERTICAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | 2.359           | 43.47                | PK  | 32            | -23.1                  | 0            | 52.37                      | -                      | -           | 74                  | -21.63         | 314            | 148         | V        |
| 4      | 2.36            | 31.46                | RMS | 32            | -23.1                  | .32          | 40.66                      | 54                     | -13.34      | -                   | -              | 314            | 148         | V        |
| 1      | 2.39            | 41.09                | PK  | 32.1          | -23.1                  | 0            | 50.09                      | -                      | -           | 74                  | -23.91         | 314            | 148         | V        |
| 3      | 2.39            | 30.89                | RMS | 32.1          | -23.1                  | .32          | 40.19                      | 54                     | -13.81      | -                   | -              | 314            | 148         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

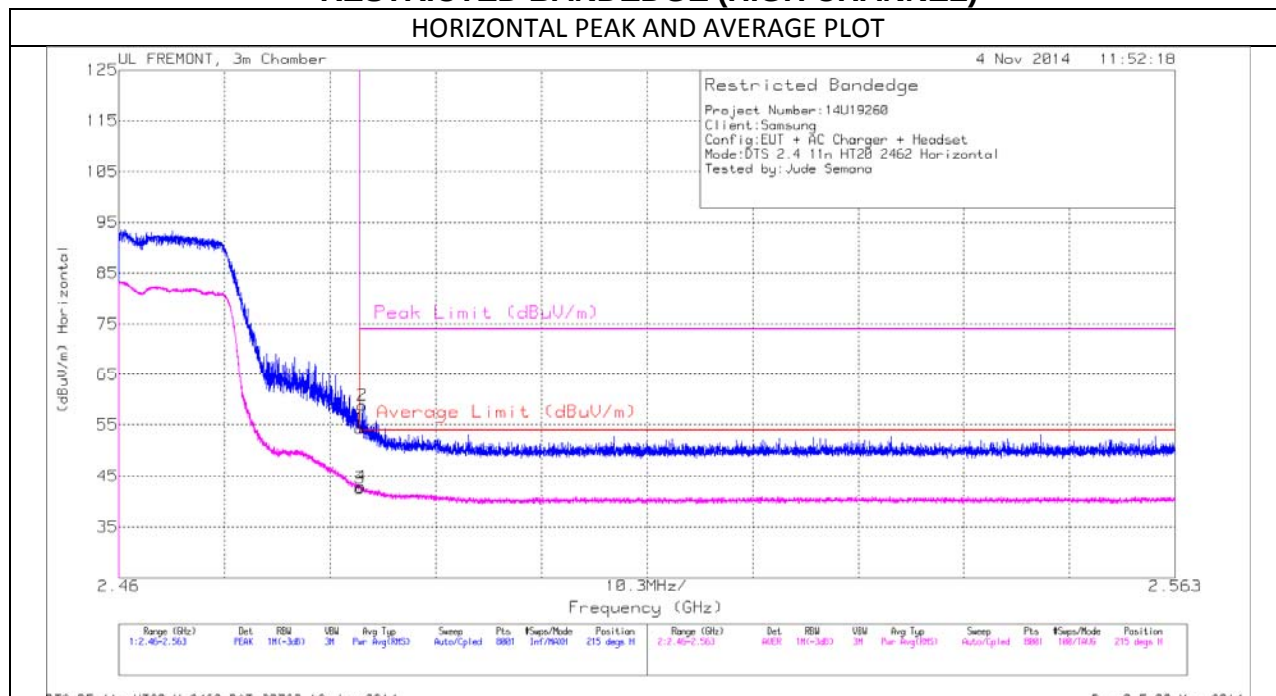

### HORIZONTAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.484           | 44.89                | PK  | 32.3          | -22.8                  | 0            | 54.39                      | -                      | -           | 74                  | -19.61         | 215            | 100         | H        |
| 2      | 2.484           | 49.34                | PK  | 32.3          | -22.8                  | 0            | 58.84                      | -                      | -           | 74                  | -15.16         | 215            | 100         | H        |
| 3      | 2.484           | 33.1                 | RMS | 32.3          | -22.8                  | 0.32         | 42.6                       | 54                     | -11.4       | -                   | -              | 215            | 100         | H        |
| 4      | 2.484           | 33.34                | RMS | 32.3          | -22.8                  | 0.32         | 42.84                      | 54                     | -11.16      | -                   | -              | 215            | 100         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## RESTRICTED BANDEDGE (HIGH CHANNEL)

### VERTICAL PEAK AND AVERAGE PLOT

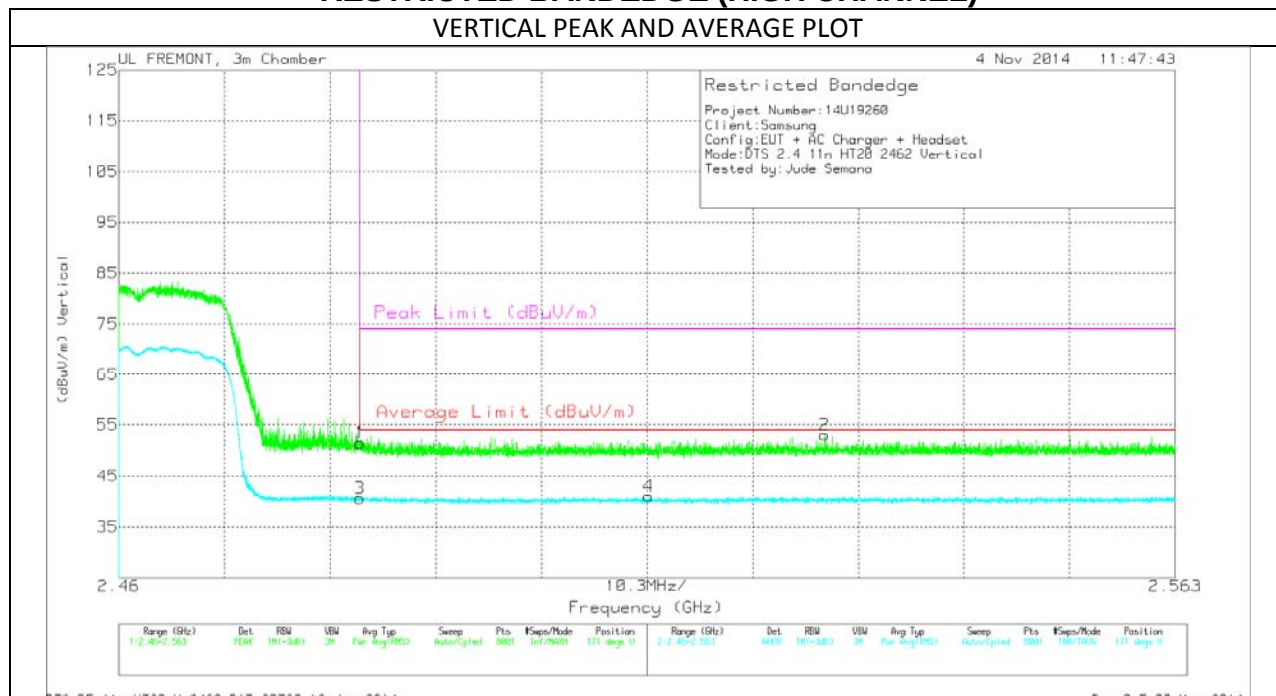

### VERTICAL PEAK AND AVERAGE DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.484           | 42.03                | PK  | 32.3          | -22.8                  | 0            | 51.53                      | -                      | -           | 74                  | -22.47         | 171            | 106         | V        |
| 3      | 2.484           | 31.1                 | RMS | 32.3          | -22.8                  | 0.32         | 40.6                       | 54                     | -13.4       | -                   | -              | 171            | 106         | V        |
| 4      | 2.512           | 31.51                | RMS | 32.3          | -22.8                  | 0.32         | 41.01                      | 54                     | -12.99      | -                   | -              | 171            | 106         | V        |
| 2      | 2.529           | 43.26                | PK  | 32.4          | -22.6                  | 0            | 53.06                      | -                      | -           | 74                  | -20.94         | 171            | 106         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


## HARMONICS AND SPURIOUS EMISSIONS

### SPURIOUS (LOW CHANNEL)

#### HORIZONTAL PLOT

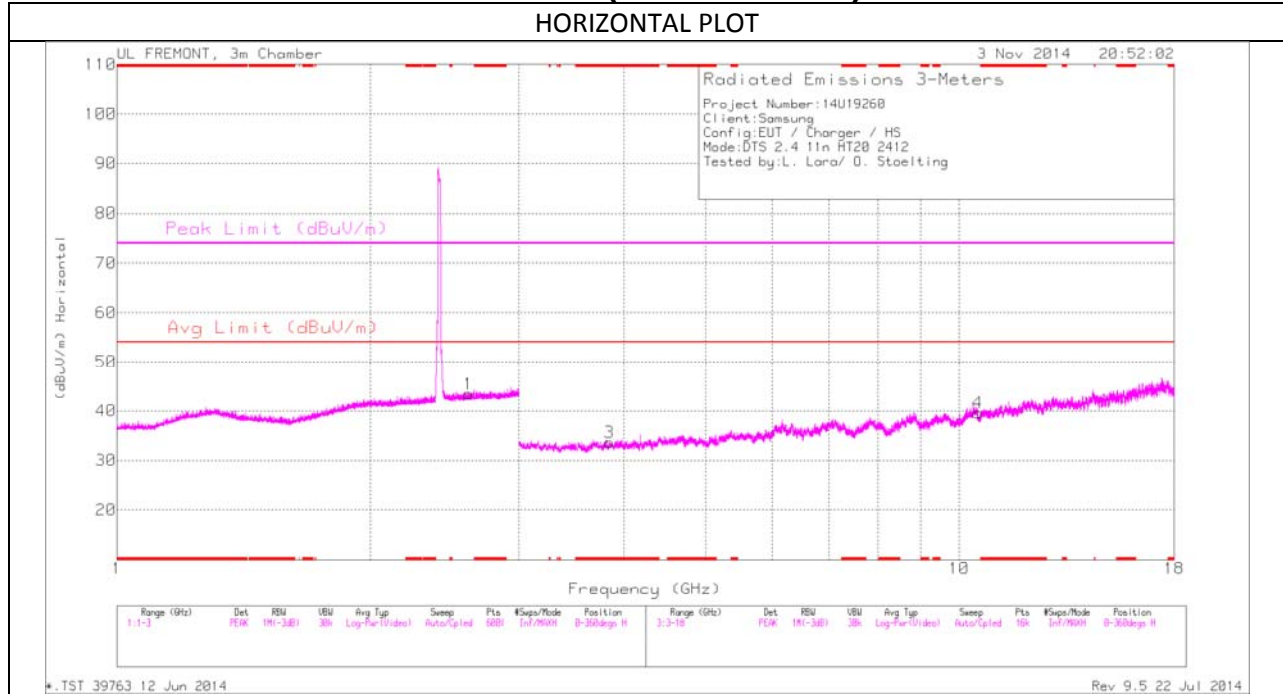

#### VERTICAL PLOT

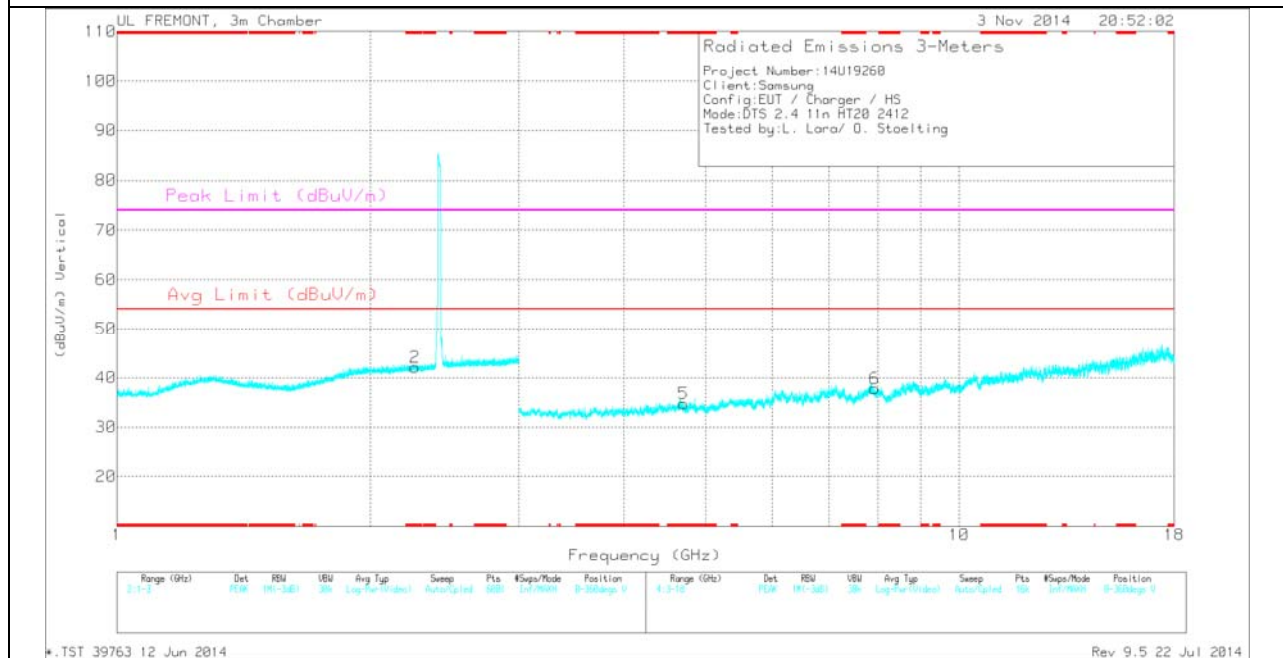

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.26          | 32.98                | PK  | 31.8           | -23                    | 0            | 42.13                      | -                  | -           | 74                  | -31.87         | 0-360          | 100         | V        |
| 3      | * 3.841         | 31.21                | PK  | 33.2           | -31.1                  | 0            | 33.66                      | -                  | -           | 74                  | -40.34         | 0-360          | 100         | H        |
| 5      | * 4.703         | 31.35                | PK  | 34.1           | -31                    | 0            | 34.8                       | -                  | -           | 74                  | -39.2          | 0-360          | 100         | V        |
| 1      | 2.613           | 33.28                | PK  | 32.5           | -22.7                  | 0            | 43.43                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 6      | 7.939           | 29.72                | PK  | 35.8           | -28.1                  | 0            | 37.77                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 4      | 10.529          | 26.89                | PK  | 37.6           | -25.3                  | 0            | 39.54                      | -                  | -           | -                   | -              | 0-360          | 200         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.705         | 40.85                | PK2  | 34.1           | -31                    | 0            | 44.3                       | -                  | -           | 74                  | -29.7          | 0              | 100         | V        |
| * 4.702         | 29.54                | MAv1 | 34.1           | -30.9                  | 0.32         | 32.74                      | 54                 | -21.26      | -                   | -              | 0              | 100         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

## SPURIOUS (MID CHANNEL)

### HORIZONTAL PLOT

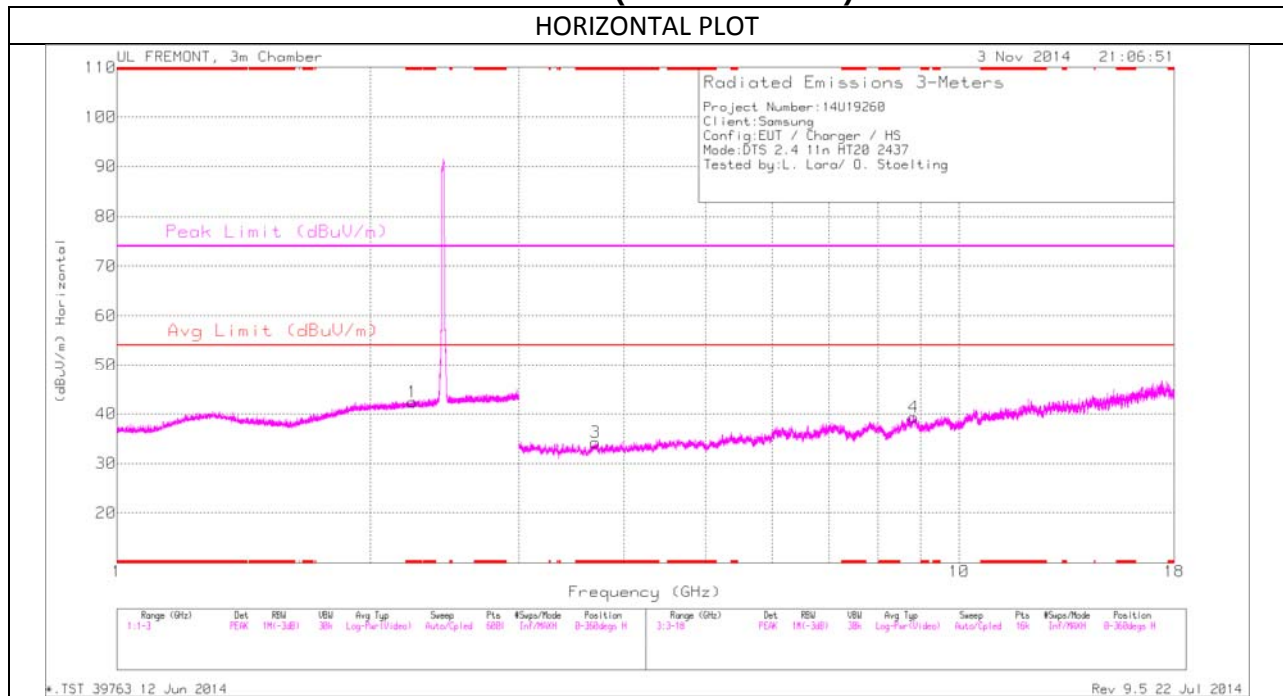

### VERTICAL PLOT

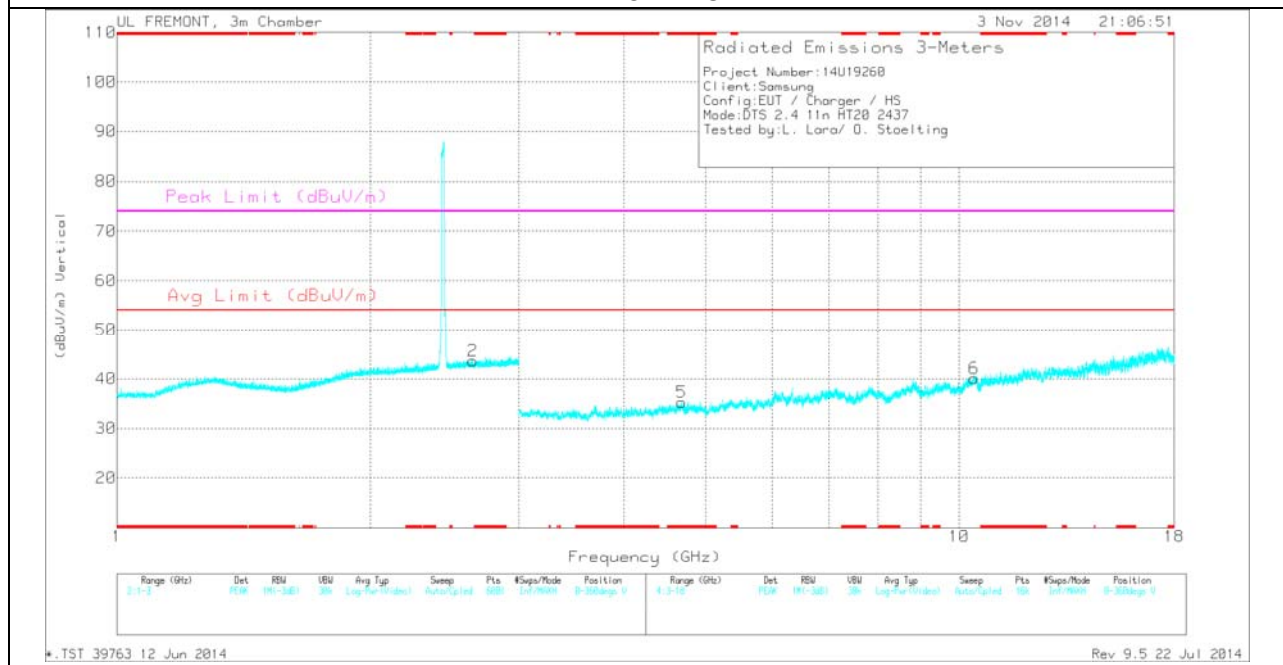

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.245         | 33.23                | PK  | 31.8           | -23                    | 0            | 42.38                      | -                  | -           | 74                  | -31.62         | 0-360          | 100         | H        |
| 3      | * 3.697         | 31.49                | PK  | 33.2           | -30.8                  | 0            | 34.24                      | -                  | -           | 74                  | -39.76         | 0-360          | 100         | H        |
| 5      | * 4.683         | 31.54                | PK  | 34.1           | -30.7                  | 0            | 35.29                      | -                  | -           | 74                  | -38.71         | 0-360          | 100         | V        |
| 2      | 2.645           | 33.54                | PK  | 32.6           | -22.8                  | 0            | 43.69                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 4      | 8.836           | 29.53                | PK  | 36             | -26.5                  | 0            | 39.38                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 6      | 10.421          | 27.45                | PK  | 37.4           | -25.1                  | 0            | 40.1                       | -                  | -           | -                   | -              | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.682         | 41.1                 | PK2  | 34.1           | -30.7                  | 0            | 44.85                      | -                  | -           | 74                  | -29.15         | 0              | 100         | V        |
| * 4.682         | 29.3                 | MAV1 | 34.1           | -30.7                  | 0.32         | 32.7                       | 54                 | -21.3       | -                   | -              | 0              | 100         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAV1 - KDB558074 Option 1 Maximum RMS Average

## SPURIOUS (HIGH CHANNEL)

### HORIZONTAL PLOT

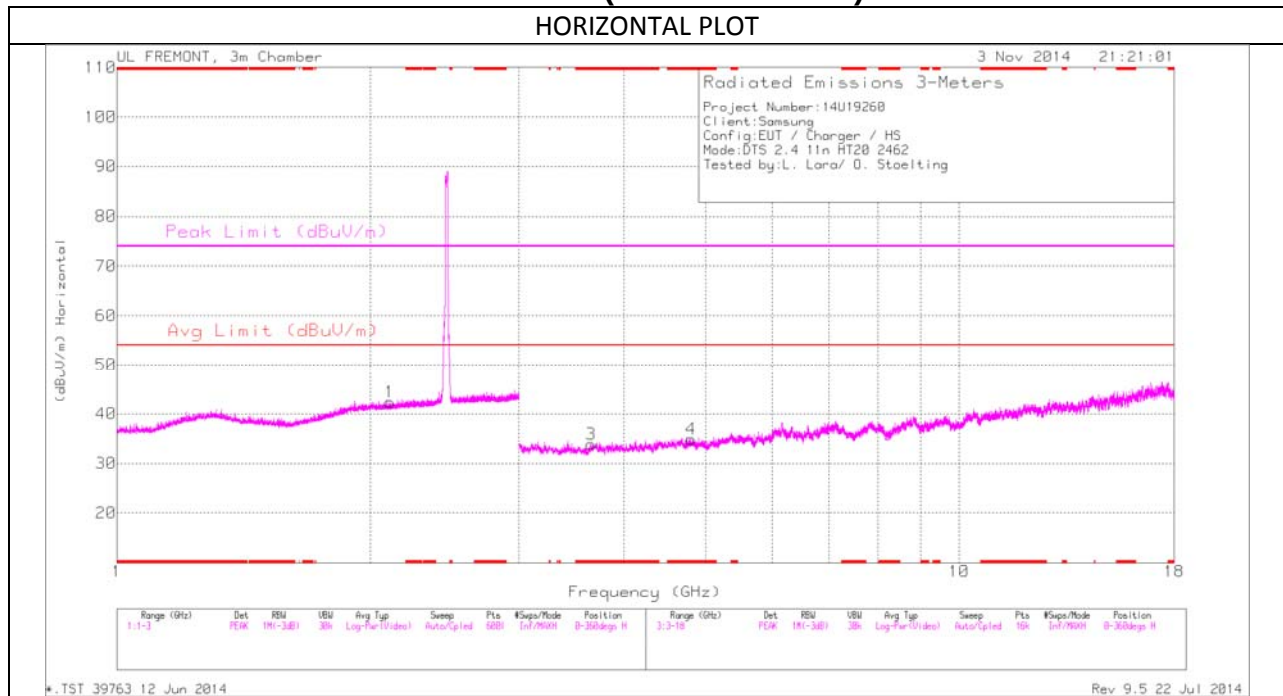

### VERTICAL PLOT

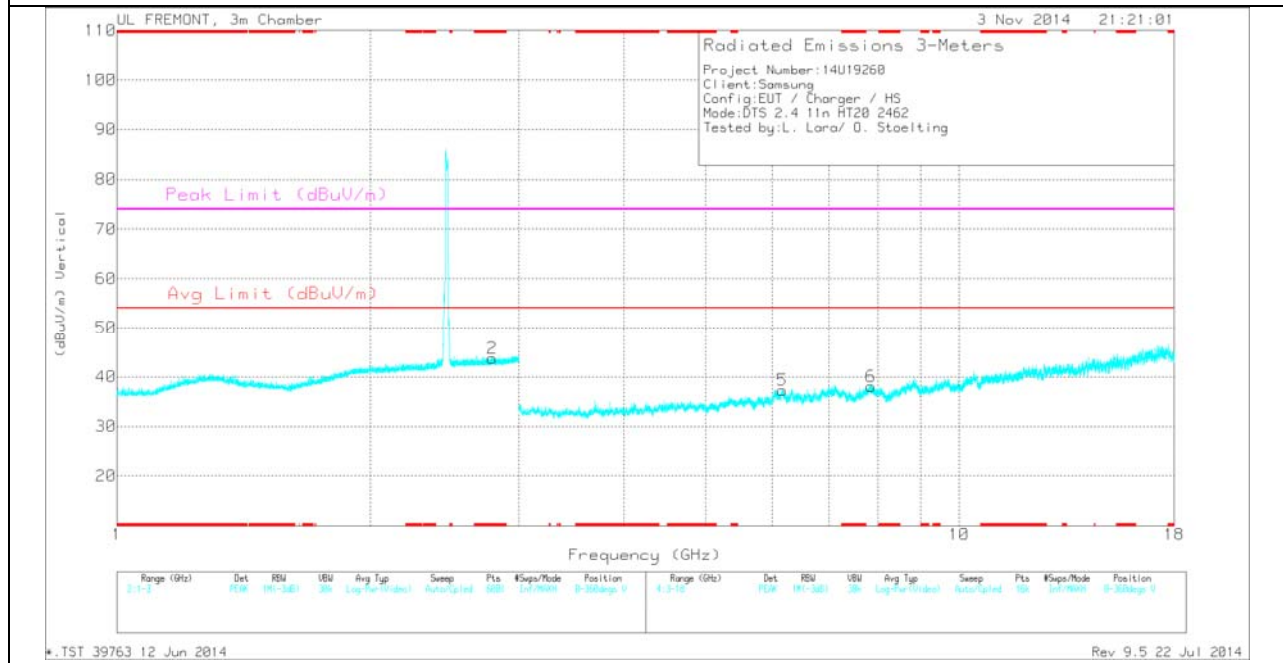

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.792         | 33.57                | PK  | 32.7           | -22.8                  | 0            | 43.82                      | -                  | -           | 74                  | -30.18         | 0-360          | 100         | V        |
| 3      | * 3.652         | 31.65                | PK  | 33.1           | -31.2                  | 0            | 33.9                       | -                  | -           | 74                  | -40.1          | 0-360          | 200         | H        |
| 4      | * 4.802         | 30.71                | PK  | 34.1           | -30.3                  | 0            | 34.86                      | -                  | -           | 74                  | -39.14         | 0-360          | 100         | H        |
| 1      | 2.108           | 33.55                | PK  | 31.5           | -23                    | 0            | 42.4                       | -                  | -           | -                   | -              | 0-360          | 200         | H        |
| 5      | 6.162           | 31.41                | PK  | 35.3           | -29.8                  | 0            | 37.26                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 6      | 7.861           | 29.19                | PK  | 35.8           | -27.3                  | 0            | 38.04                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.803         | 40.44                | PK2  | 34.1           | -30.3                  | 0            | 44.59                      | -                  | -           | 74                  | -29.41         | 0              | 100         | H        |
| * 4.803         | 29.24                | MAV1 | 34.1           | -30.3                  | 0.32         | 33.04                      | 54                 | -20.96      | -                   | -              | 0              | 100         | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

## 11.2. TRANSMITTER BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

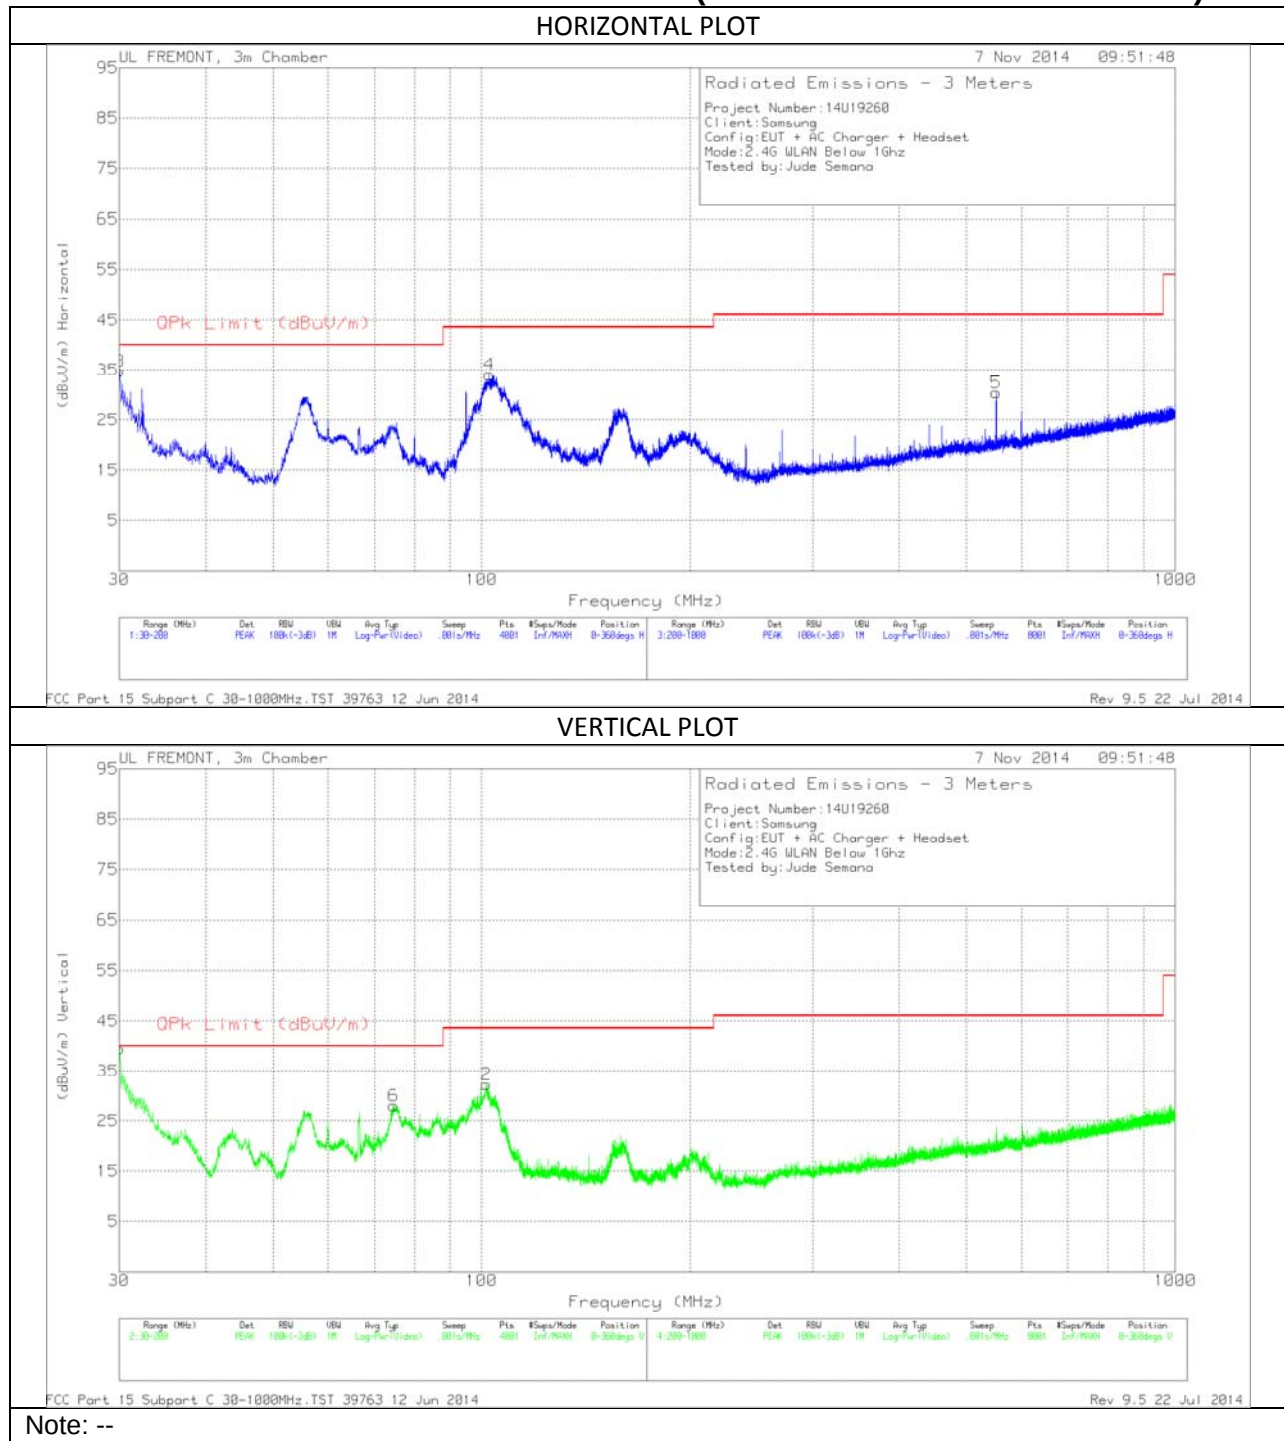

**BELOW 1 GHz TABLE**

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T185 (dB/m) | Amp/Cbl (dB/m) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 3      | 30.0425         | 41.26                | PK  | 21             | -27.5          | 34.76                      | 40                 | -5.24       | 0-360          | 200         | H        |
| 1      | 30.0425         | 46.03                | PK  | 21             | -27.5          | 39.53                      | 40                 | -.47        | 0-360          | 100         | V        |
| 6      | 74.6675         | 47.13                | PK  | 8              | -27.1          | 28.03                      | 40                 | -11.97      | 0-360          | 100         | V        |
| 2      | 101.5275        | 48.82                | PK  | 10.3           | -26.8          | 32.32                      | 43.52              | -11.2       | 0-360          | 100         | V        |
| 4      | 102.5475        | 50.3                 | PK  | 10.6           | -26.8          | 34.1                       | 43.52              | -9.42       | 0-360          | 200         | H        |
| 5      | 552             | 38.12                | PK  | 18.1           | -25.8          | 30.42                      | 46.02              | -15.6       | 0-360          | 200         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Note: --

## 12. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS AND PROCEDURE

#### LIMITS

FCC §15.207 (a)

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |


\*Decreases with the logarithm of the frequency.


### TEST PROCEDURE

ANSI C63.4 - 2009

### RESULTS

## 6 WORST EMISSIONS

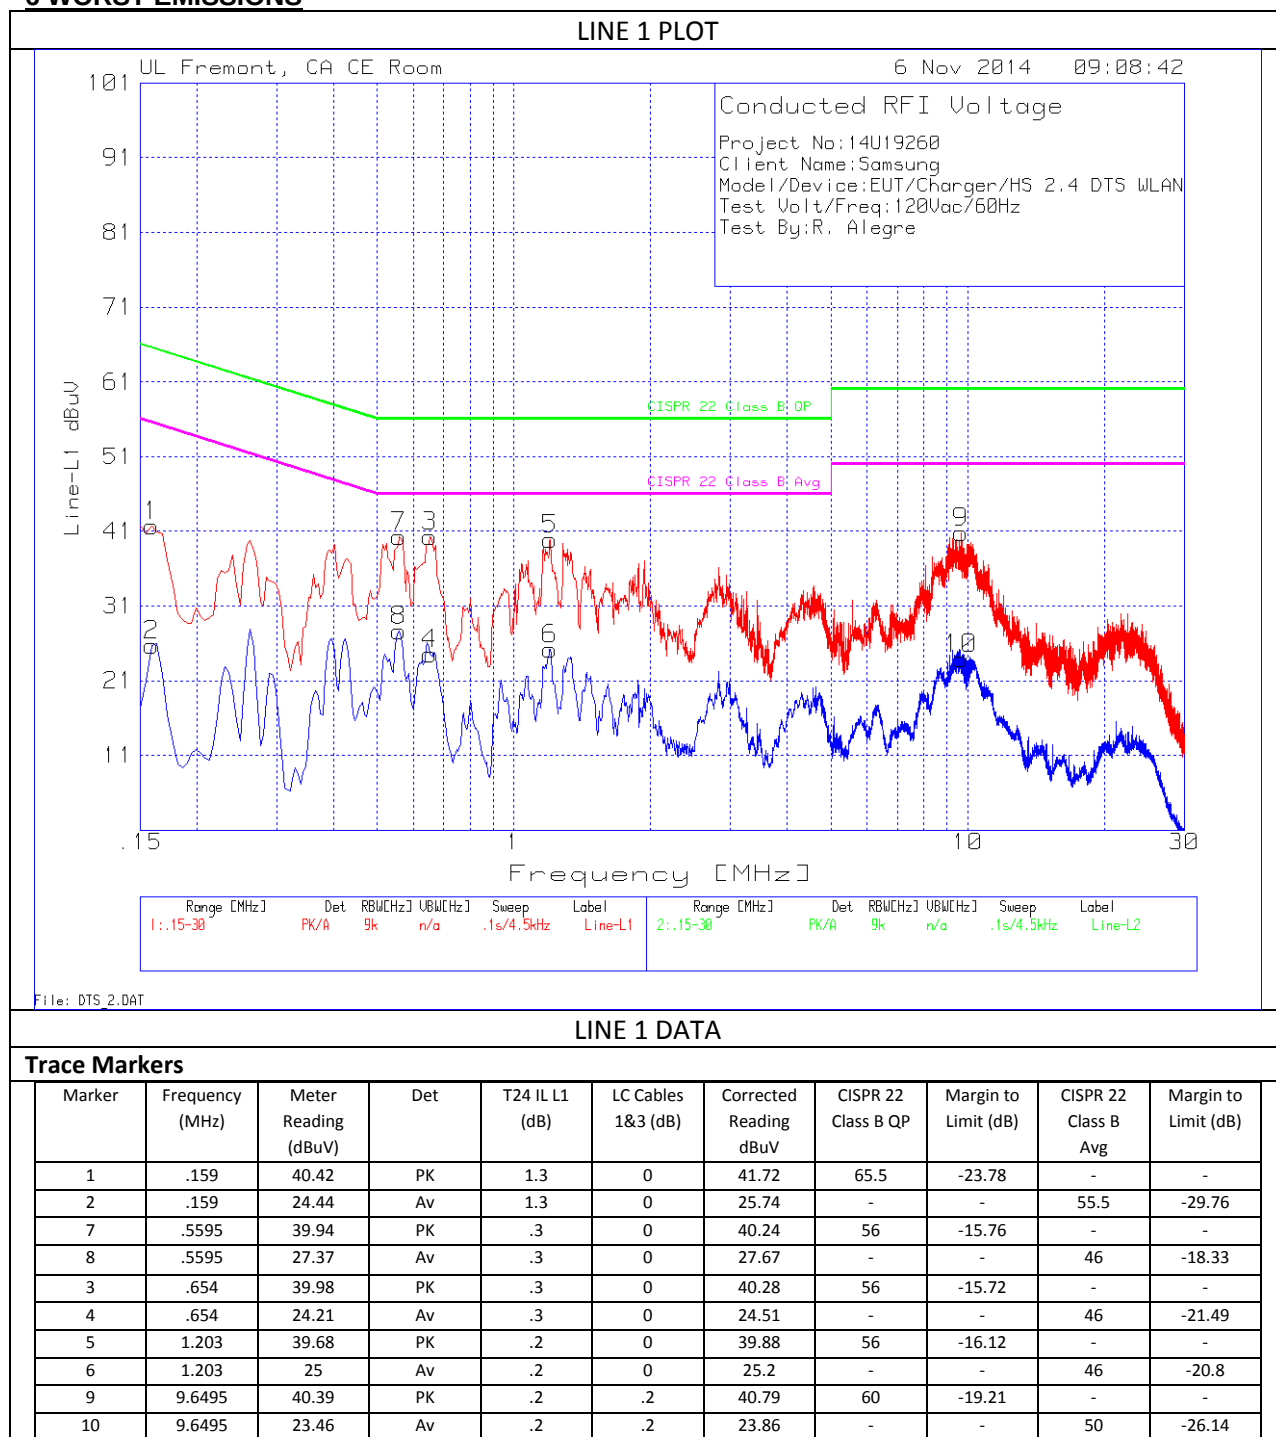

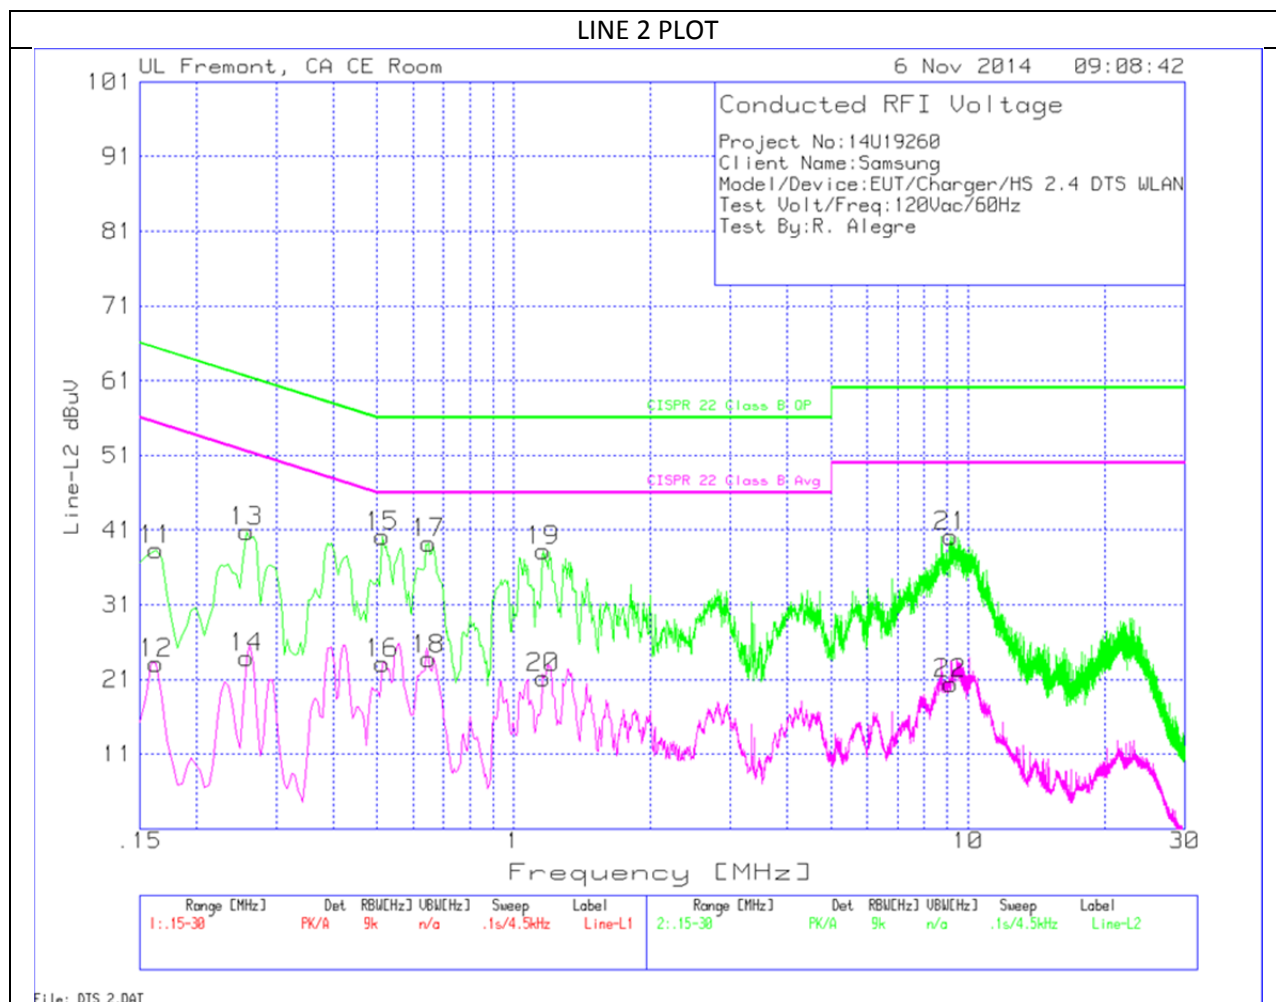

**LINE 2 DATA**

**Trace Markers**

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 (dB) | LC Cables 2&3 (dB) | Corrected Reading dBuV | CISPR 22 Class B QP | Margin to Limit (dB) | CISPR 22 Class B Avg | Margin to Limit (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|------------------------|---------------------|----------------------|----------------------|----------------------|
| 11     | .1635           | 37.04                | PK  | 1.3            | 0                  | 38.34                  | 65.3                | -26.96               | -                    | -                    |
| 12     | .1635           | 21.79                | Av  | 1.3            | 0                  | 23.09                  | -                   | -                    | 55.3                 | -32.21               |
| 13     | .258            | 40.1                 | PK  | .7             | 0                  | 40.8                   | 61.5                | -20.7                | -                    | -                    |
| 14     | .258            | 23.15                | Av  | .7             | 0                  | 23.85                  | -                   | -                    | 51.5                 | -27.65               |
| 15     | .5145           | 39.72                | PK  | .4             | 0                  | 40.12                  | 56                  | -15.88               | -                    | -                    |
| 16     | .5145           | 22.76                | Av  | .4             | 0                  | 23.16                  | -                   | -                    | 46                   | -22.84               |
| 17     | .6495           | 38.93                | PK  | .3             | 0                  | 39.23                  | 56                  | -16.77               | -                    | -                    |
| 18     | .6495           | 23.41                | Av  | .3             | 0                  | 23.71                  | -                   | -                    | 46                   | -22.29               |
| 19     | 1.1625          | 37.93                | PK  | .3             | 0                  | 38.23                  | 56                  | -17.77               | -                    | -                    |
| 20     | 1.1625          | 20.93                | Av  | .3             | 0                  | 21.23                  | -                   | -                    | 46                   | -24.77               |
| 21     | 9.141           | 39.74                | PK  | .2             | .2                 | 40.14                  | 60                  | -19.86               | -                    | -                    |
| 22     | 9.141           | 20.02                | Av  | .2             | .2                 | 20.42                  | -                   | -                    | 50                   | -29.58               |