

# FCC RF Test Report

**APPLICANT** : Samsung Electronics Co., Ltd.  
**EQUIPMENT** : Mobile phone  
**BRAND NAME** : SAMSUNG  
**MODEL NAME** : SM-A500YZ  
**FCC ID** : A3LSMA500YZ  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Aug. 25, 2014 and testing was completed on Oct. 09, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



---

Reviewed by: Joseph Lin / Supervisor



---

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL (SHENZHEN) INC.**

**No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.**



## TABLE OF CONTENTS

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                          | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                           | <b>5</b>  |
| 1.1 Applicant .....                                          | 5         |
| 1.2 Manufacturer .....                                       | 5         |
| 1.3 Feature of Equipment Under Test .....                    | 5         |
| 1.4 Product Specification of Equipment Under Test .....      | 6         |
| 1.5 Modification of EUT .....                                | 7         |
| 1.6 Testing Location .....                                   | 7         |
| 1.7 Applicable Standards .....                               | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>    | <b>8</b>  |
| 2.1 Carrier Frequency Channel .....                          | 9         |
| 2.2 Pre-Scanned RF Power .....                               | 10        |
| 2.3 Test Mode .....                                          | 12        |
| 2.4 Connection Diagram of Test System .....                  | 14        |
| 2.5 Support Unit used in test configuration and system ..... | 15        |
| 2.6 EUT Operation Test Setup .....                           | 15        |
| 2.7 Measurement Results Explanation Example .....            | 16        |
| <b>3 TEST RESULT .....</b>                                   | <b>17</b> |
| 3.1 26dB & 99% Occupied Bandwidth Measurement .....          | 17        |
| 3.2 Maximum Conducted Output Power Measurement .....         | 22        |
| 3.3 Power Spectral Density Measurement .....                 | 26        |
| 3.4 Unwanted Radiated Emission Measurement .....             | 31        |
| 3.5 AC Conducted Emission Measurement .....                  | 71        |
| 3.6 Frequency Stability Measurement .....                    | 75        |
| 3.7 Automatically Discontinue Transmission .....             | 77        |
| 3.8 Antenna Requirements .....                               | 78        |
| <b>4 LIST OF MEASURING EQUIPMENTS .....</b>                  | <b>79</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                     | <b>80</b> |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION                                                                                                                | ISSUED DATE   |
|------------|---------|----------------------------------------------------------------------------------------------------------------------------|---------------|
| FR482502D  | Rev. 01 | Initial issue of report                                                                                                    | Oct. 20, 2014 |
| FR482502D  | Rev. 02 | Update report for correcting the antenna gain and the title of the power table on page 10&11 which revising "2.4G" to "5G" | Oct. 23, 2014 |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |
|            |         |                                                                                                                            |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | Description                            | Limit                                          | Result | Remark                                    |
|----------------|-----------------------|----------------------------------------|------------------------------------------------|--------|-------------------------------------------|
| 3.1            | 2.1049<br>15.403(i)   | 26dB & 99% Bandwidth                   | -                                              | Pass   | -                                         |
| 3.2            | 15.407(a)             | Maximum Conducted Output Power         | $\leq 24$ dBm                                  | Pass   | -                                         |
| 3.3            | 15.407(a)             | Power Spectral Density                 | $\leq 11$ dBm                                  | Pass   | -                                         |
| 3.4            | 15.407(b)             | Unwanted Emissions                     | $\leq -17, -27$ dBm (depend on band)&15.209(a) | Pass   | Under limit<br>3.03 dB at<br>5150.000 MHz |
| 3.5            | 15.207                | AC Conducted Emission                  | 15.207(a)                                      | Pass   | Under limit<br>13.15 dB at<br>11.320 MHz  |
| 3.6            | 15.407(g)             | Frequency Stability                    | Within Operation Band                          | Pass   | -                                         |
| 3.7            | 15.407(c)             | Automatically Discontinue Transmission | Discontinue Transmission                       | Pass   | -                                         |
| 3.8            | 15.203 &<br>15.407(a) | Antenna Requirement                    | N/A                                            | Pass   | -                                         |

# 1 General Description

## 1.1 Applicant

Samsung Electronics Co., Ltd.

No.9 WeiWu Rd., Micro Electronic Industrial Park, Jingang Highway, Xiqing District, Tianjin, China

## 1.2 Manufacturer

Samsung Electronics Co., Ltd.

256, 6th Road Zhongkai, Chenjiang Town Huizhou City, Guangdong Province, China

## 1.3 Feature of Equipment Under Test

| Product Feature            |                                                      |
|----------------------------|------------------------------------------------------|
| Equipment                  | Mobile phone                                         |
| Brand Name                 | SAMSUNG                                              |
| Model Name                 | SM-A500YZ                                            |
| FCC ID                     | A3LSMA500YZ                                          |
| GSM Operating Band(s)      | GSM850/900/1800/1900MHz                              |
| GPRS/EGPRS Multislot Class | GPRS Class 33, EGPRS Class 33                        |
| WCDMA Operating Band(s)    | Band I/II/V/VIII                                     |
| LTE Operating Band(s)      | FDD Band 3/8/28                                      |
| Wi-Fi Specification        | 2.4GHz 802.11b/g/n HT20/<br>5GHz 802.11a/n HT20/HT40 |
| Bluetooth Version          | Bluetooth v3.0 + EDR/Bluetooth v4.0 LE               |
| HW Version                 | REV1.0                                               |
| SW Version                 | A500YZ.001                                           |
| EUT Stage                  | Identical Prototype                                  |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx/Rx Frequency Range</b>                      | 5180 MHz ~ 5240 MHz<br>5260 MHz ~ 5320 MHz<br>5500 MHz ~ 5700 MHz                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Maximum (Average) Output Power to Antenna</b>  | <b>&lt;5180 MHz ~ 5240 MHz&gt;</b><br>802.11a : 12.37 dBm / 0.0173 W<br>802.11n HT20 : 12.00 dBm / 0.0158 W<br>802.11n HT40 : 10.35 dBm / 0.0108 W<br><b>&lt;5260 MHz ~ 5320 MHz&gt;</b><br>802.11a : 12.86 dBm / 0.0193 W<br>802.11n HT20 : 12.30 dBm / 0.0170 W<br>802.11n HT40 : 10.71 dBm / 0.0118 W<br><b>&lt;5500 MHz ~ 5700 MHz&gt;</b><br>802.11a : 11.07 dBm / 0.0128 W<br>802.11n HT20 : 10.67 dBm / 0.0117 W<br>802.11n HT40 : 9.10 dBm / 0.0081 W |
| <b>Antenna Type</b>                               | PIFA Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Antenna Gain</b>                               | <b>&lt;5180 MHz ~ 5240 MHz&gt;</b> : -8.60 dBi<br><b>&lt;5260 MHz ~ 5320 MHz&gt;</b> : -8.60 dBi<br><b>&lt;5500 MHz ~ 5700 MHz&gt;</b> : -12.3 dBi                                                                                                                                                                                                                                                                                                            |
| <b>Type of Modulation</b>                         | 802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                                                                                                                                                                                                                                                                                                                |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

|                           |                                                                                                                  |         |                             |
|---------------------------|------------------------------------------------------------------------------------------------------------------|---------|-----------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (KUNSHAN) INC.                                                                             |         |                             |
| <b>Test Site Location</b> | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |         |                             |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                          |         | <b>FCC Registration No.</b> |
|                           | 03CH01-KS                                                                                                        | CO01-KS | 149928                      |

|                           |                                                                                                                                                           |  |                             |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                                                                                                     |  |                             |
| <b>Test Site Location</b> | No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.<br>TEL: +86-755-3320-2398 |  |                             |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                   |  | <b>FCC Registration No.</b> |
|                           | TH01-SZ                                                                                                                                                   |  | 831040                      |

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ANSI C63.4-2003

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## **2 Test Configuration of Equipment Under Test**

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

## 2.1 Carrier Frequency Channel

| Frequency Band                       | Channel   | Freq. (MHz) | Channel   | Freq. (MHz) |
|--------------------------------------|-----------|-------------|-----------|-------------|
| 5150-5250 MHz<br>Band 1<br>(U-NII-1) | 36        | 5180        | 44        | 5220        |
|                                      | <b>38</b> | <b>5190</b> | <b>46</b> | <b>5230</b> |
|                                      | 40        | 5200        | 48        | 5240        |

| Frequency Band                        | Channel   | Freq. (MHz) | Channel   | Freq. (MHz) |
|---------------------------------------|-----------|-------------|-----------|-------------|
| 5250-5350 MHz<br>Band 2<br>(U-NII-2A) | 52        | 5260        | 60        | 5300        |
|                                       | <b>54</b> | <b>5270</b> | <b>62</b> | <b>5310</b> |
|                                       | 56        | 5280        | 64        | 5320        |

| Frequency Band                                                | Channel    | Freq. (MHz) | Channel    | Freq. (MHz) |
|---------------------------------------------------------------|------------|-------------|------------|-------------|
| 5470-5600 MHz<br>and<br>5650-5725 MHz<br>Band 3<br>(U-NII-2C) | 100        | 5500        | 116        | 5580        |
|                                                               | <b>102</b> | <b>5510</b> | 132        | 5660        |
|                                                               | 104        | 5520        | <b>134</b> | <b>5670</b> |
|                                                               | 108        | 5540        | 136        | 5680        |
|                                                               | <b>110</b> | <b>5550</b> | 140        | 5700        |
|                                                               | 112        | 5560        |            |             |

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

| 5GHz 802.11a RF Output Power (dBm) |                 |                    |                     |        |        |        |        |        |        |        |
|------------------------------------|-----------------|--------------------|---------------------|--------|--------|--------|--------|--------|--------|--------|
| Power vs. Channel                  |                 |                    | Power vs. MCS Index |        |        |        |        |        |        |        |
| Channel                            | Frequency (MHz) | MCS Index<br>6Mbps | Channel             | 9M bps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
| CH 36                              | 5180            | 12.20              | CH 48               | 12.28  | 12.30  | 12.24  | 12.21  | 12.22  | 12.27  | 12.32  |
| CH 44                              | 5220            | 12.27              |                     |        |        |        |        |        |        |        |
| CH 48                              | 5240            | 12.37              |                     |        |        |        |        |        |        |        |
| CH 52                              | 5260            | 12.48              | CH 64               | 12.81  | 12.79  | 12.70  | 12.71  | 12.72  | 12.72  | 12.82  |
| CH 60                              | 5300            | 12.11              |                     |        |        |        |        |        |        |        |
| CH 64                              | 5320            | 12.86              |                     |        |        |        |        |        |        |        |
| CH 100                             | 5500            | 11.07              | CH 100              | 10.93  | 10.93  | 10.94  | 10.87  | 10.92  | 10.89  | 10.98  |
| CH 116                             | 5580            | 10.70              |                     |        |        |        |        |        |        |        |
| CH 140                             | 5700            | 10.61              |                     |        |        |        |        |        |        |        |



| 5GHz 802.11n HT20 RF Output Power (dBm) |                 |                   |                     |       |       |       |       |       |       |       |
|-----------------------------------------|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                       |                 |                   | Power vs. MCS Index |       |       |       |       |       |       |       |
| Channel                                 | Frequency (MHz) | MCS Index<br>MCS0 | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 36                                   | 5180            | 11.74             | CH 48               | 11.92 | 11.70 | 11.81 | 11.84 | 11.89 | 11.85 | 11.94 |
| CH 44                                   | 5220            | 11.88             |                     |       |       |       |       |       |       |       |
| CH 48                                   | 5240            | 12.00             |                     |       |       |       |       |       |       |       |
| CH 52                                   | 5260            | 12.10             | CH 64               | 12.24 | 12.02 | 12.15 | 12.15 | 12.20 | 12.27 | 12.24 |
| CH 60                                   | 5300            | 11.77             |                     |       |       |       |       |       |       |       |
| CH 64                                   | 5320            | 12.30             |                     |       |       |       |       |       |       |       |
| CH 100                                  | 5500            | 10.57             | CH 116              | 10.60 | 10.33 | 10.50 | 10.47 | 10.54 | 10.59 | 10.61 |
| CH 116                                  | 5580            | 10.67             |                     |       |       |       |       |       |       |       |
| CH 140                                  | 5700            | 10.49             |                     |       |       |       |       |       |       |       |

| 5GHz 802.11n HT40 RF Output Power (dBm) |                 |                   |                     |       |       |       |       |       |       |       |
|-----------------------------------------|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                       |                 |                   | Power vs. MCS Index |       |       |       |       |       |       |       |
| Channel                                 | Frequency (MHz) | MCS Index<br>MCS0 | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 38                                   | 5190            | 10.20             | CH 46               | 10.11 | 10.09 | 10.14 | 10.13 | 10.21 | 10.18 | 10.15 |
| CH 46                                   | 5230            | 10.35             |                     |       |       |       |       |       |       |       |
| CH 54                                   | 5270            | 10.61             | CH 62               | 10.56 | 10.48 | 10.55 | 10.55 | 10.66 | 10.57 | 10.56 |
| CH 62                                   | 5310            | 10.71             |                     |       |       |       |       |       |       |       |
| CH 102                                  | 5510            | 9.10              | CH 102              | 8.92  | 8.81  | 8.92  | 8.91  | 9.00  | 8.94  | 8.89  |
| CH 110                                  | 5550            | 9.07              |                     |       |       |       |       |       |       |       |
| CH 134                                  | 5670            | 9.06              |                     |       |       |       |       |       |       |       |

## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

| Test Cases                                                                                      |                                                                                                        |              |           |              |
|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------|-----------|--------------|
| Conducted<br>TCs                                                                                | Test Items                                                                                             | Mode         | Data rate | Test Channel |
|                                                                                                 | 26dB and 99% BW<br>Power Spectral<br>Density                                                           | 802.11a      | 6 Mbps    | L/M/H        |
|                                                                                                 |                                                                                                        | 802.11n HT20 | MCS0      | L/M/H        |
|                                                                                                 |                                                                                                        | 802.11n HT40 | MCS0      | L/M/H        |
|                                                                                                 | 20dB Occupied<br>Bandwidth                                                                             | 802.11a      | 6 Mbps    | H            |
|                                                                                                 |                                                                                                        | 802.11n HT20 | MCS0      | H            |
|                                                                                                 |                                                                                                        | 802.11n HT40 | MCS0      | H            |
|                                                                                                 | Output Power                                                                                           | 802.11a      | 6 Mbps    | L/M/H        |
|                                                                                                 |                                                                                                        | 802.11n HT20 | MCS0      | L/M/H        |
|                                                                                                 |                                                                                                        | 802.11n HT40 | MCS0      | L/M/H        |
|                                                                                                 | Frequency Stability                                                                                    | 802.11a      | 6 Mbps    | L/H          |
| Radiated<br>TCs                                                                                 | Radiated Band Edge                                                                                     | 802.11a      | 6 Mbps    | L/H          |
|                                                                                                 |                                                                                                        | 802.11n HT20 | MCS0      | L/H          |
|                                                                                                 |                                                                                                        | 802.11n HT40 | MCS0      | L/H          |
|                                                                                                 | Radiated Spurious<br>Emission                                                                          | 802.11a      | 6 Mbps    | L/M/H        |
|                                                                                                 |                                                                                                        | 802.11n HT20 | MCS0      | L/M/H        |
|                                                                                                 |                                                                                                        | 802.11n HT40 | MCS0      | L/M/H        |
| AC<br>Conducted<br>Emission                                                                     | Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN 5GHz Link + USB Cable (Charging from Adapter) + Earphone |              |           |              |
| Remark: For radiated test cases, the tests were performed with adapter, earphone and USB cable. |                                                                                                        |              |           |              |




| Ch. # |        | Band I : 5150-5250 MHz | Band II : 5250-5350 MHz | Band III : 5470-5600 MHz<br>and 5650-5725MHz |
|-------|--------|------------------------|-------------------------|----------------------------------------------|
|       |        | 802.11a                | 802.11a                 | 802.11a                                      |
| L     | Low    | 36                     | 52                      | 100                                          |
| M     | Middle | 44                     | 60                      | 116                                          |
| H     | High   | 48                     | 64                      | 140                                          |

| Ch. # |        | Band I : 5150-5250 MHz | Band II : 5250-5350 MHz | Band III : 5470-5600 MHz<br>and 5650-5725MHz |
|-------|--------|------------------------|-------------------------|----------------------------------------------|
|       |        | 802.11n HT20           | 802.11n HT20            | 802.11n HT20                                 |
| L     | Low    | 36                     | 52                      | 100                                          |
| M     | Middle | 44                     | 60                      | 116                                          |
| H     | High   | 48                     | 64                      | 140                                          |


| Ch. # |        | Band I : 5150-5250 MHz | Band II : 5250-5350 MHz | Band III : 5470-5600 MHz<br>and 5650-5725MHz |
|-------|--------|------------------------|-------------------------|----------------------------------------------|
|       |        | 802.11n HT40           | 802.11n HT40            | 802.11n HT40                                 |
| L     | Low    | 38                     | 54                      | 102                                          |
| M     | Middle | -                      | -                       | 110                                          |
| H     | High   | 46                     | 62                      | 134                                          |

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

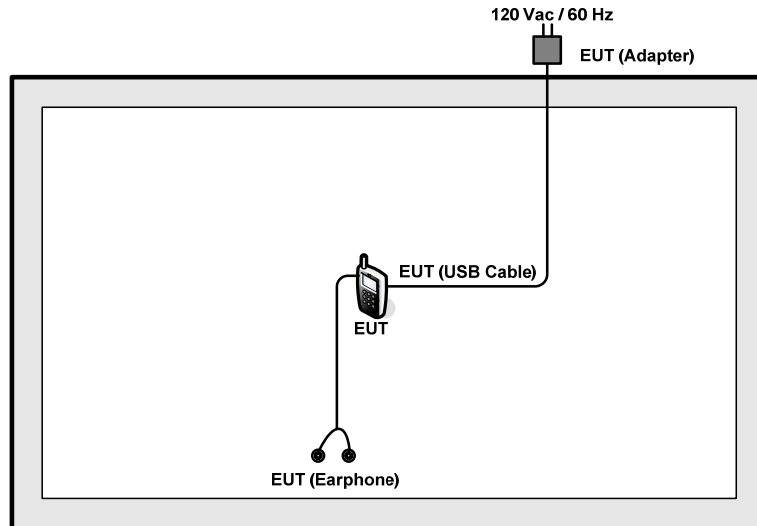

### <AC Conducted Emission Mode>

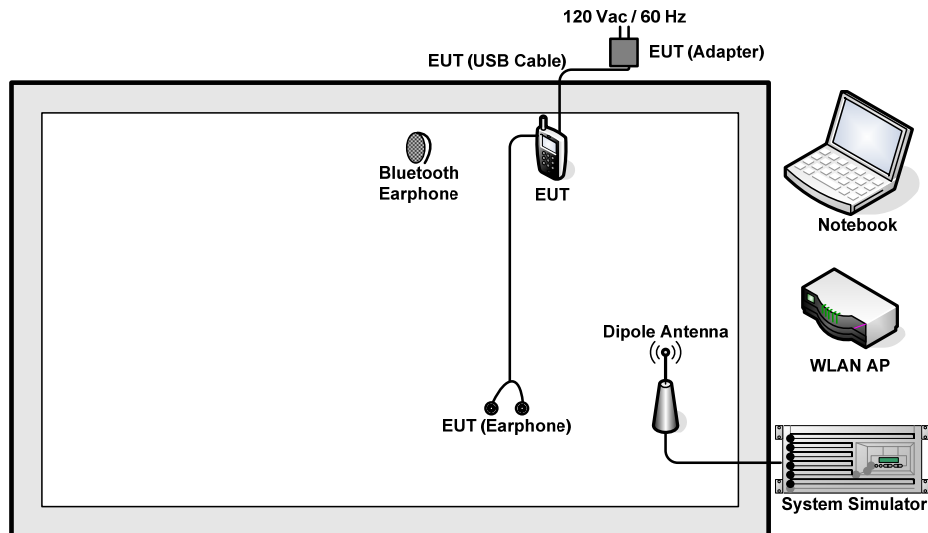

## 2.5 Support Unit used in test configuration and system

| Item | Equipment          | Trade Name | Model Name | FCC ID      | Data Cable | Power Cord                                                 |
|------|--------------------|------------|------------|-------------|------------|------------------------------------------------------------|
| 1.   | System Simulator   | R&S        | CMU 200    | N/A         | N/A        | Unshielded, 1.8 m                                          |
| 2.   | Notebook           | Lenovo     | G480       | FCC DoC     | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 3.   | WLAN AP            | D-Link     | DIR-855    | KA2DIR855A2 | N/A        | Unshielded, 1.8 m                                          |
| 4.   | Bluetooth Earphone | Nokia      | BH-108     | PYAHS-107W  | N/A        | N/A                                                        |

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 8 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss (dB)} + \text{attenuator factor (dB)} \\ &= 8 + 10 = 18 \text{ (dB)}\end{aligned}$$

### **3 Test Result**

#### **3.1 26dB & 99% Occupied Bandwidth Measurement**

##### **3.1.1 Description of 26dB & 99% Occupied Bandwidth**

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### **3.1.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

##### **3.1.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
8. Measure and record the results in the test report.

##### **3.1.4 Test Setup**

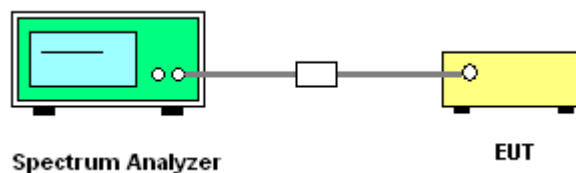



## 3.1.5 Test Result of 26dB &amp; 99% Occupied Bandwidth Plots

|                 |             |                     |        |
|-----------------|-------------|---------------------|--------|
| Test Band :     | 5GHz band 1 | Temperature :       | 24~26℃ |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | 99% Bandwidth (MHz) | 99% Bandwidth EIRP Limit (dBm) |
|------|-----------|-----------------|---------|-------------|---------------------|--------------------------------|
| 11a  | 6Mbps     | 1               | 36      | 5180        | 19.40               | 22.88                          |
| 11a  | 6Mbps     | 1               | 44      | 5220        | 19.35               | 22.87                          |
| 11a  | 6Mbps     | 1               | 48      | 5240        | 19.35               | 22.87                          |
| HT20 | MCS0      | 1               | 36      | 5180        | 19.50               | 22.90                          |
| HT20 | MCS0      | 1               | 44      | 5220        | 19.45               | 22.89                          |
| HT20 | MCS0      | 1               | 48      | 5240        | 19.60               | 22.92                          |
| HT40 | MCS0      | 1               | 38      | 5190        | 36.70               | 23.01                          |
| HT40 | MCS0      | 1               | 46      | 5230        | 36.60               | 23.01                          |


|                 |             |                     |        |
|-----------------|-------------|---------------------|--------|
| Test Band :     | 5GHz band 2 | Temperature :       | 24~26℃ |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | 26dB Bandwidth (MHz) | FCC 26dB Bandwidth Power Limit (dBm) |
|------|-----------|-----------------|---------|-------------|----------------------|--------------------------------------|
| 11a  | 6Mbps     | 1               | 52      | 5260        | 37.30                | 23.98                                |
| 11a  | 6Mbps     | 1               | 60      | 5300        | 29.85                | 23.98                                |
| 11a  | 6Mbps     | 1               | 64      | 5320        | 36.70                | 23.98                                |
| HT20 | MCS0      | 1               | 52      | 5260        | 30.25                | 23.98                                |
| HT20 | MCS0      | 1               | 60      | 5300        | 32.50                | 23.98                                |
| HT20 | MCS0      | 1               | 64      | 5320        | 31.95                | 23.98                                |
| HT40 | MCS0      | 1               | 54      | 5270        | 47.79                | 23.98                                |
| HT40 | MCS0      | 1               | 62      | 5310        | 48.42                | 23.98                                |



|                 |             |                     |         |
|-----------------|-------------|---------------------|---------|
| Test Band :     | 5GHz band 3 | Temperature :       | 24~26°C |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53%  |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | 26dB Bandwidth (MHz) | FCC 26dB Bandwidth Power Limit (dBm) |
|------|-----------|-----------------|---------|-------------|----------------------|--------------------------------------|
| 11a  | 6Mbps     | 1               | 100     | 5500        | 32.50                | 23.98                                |
| 11a  | 6Mbps     | 1               | 116     | 5580        | 32.55                | 23.98                                |
| 11a  | 6Mbps     | 1               | 140     | 5700        | 33.30                | 23.98                                |
| HT20 | MCS0      | 1               | 100     | 5500        | 32.95                | 23.98                                |
| HT20 | MCS0      | 1               | 116     | 5580        | 32.15                | 23.98                                |
| HT20 | MCS0      | 1               | 140     | 5700        | 32.20                | 23.98                                |
| HT40 | MCS0      | 1               | 102     | 5510        | 58.32                | 23.98                                |
| HT40 | MCS0      | 1               | 110     | 5550        | 59.31                | 23.98                                |
| HT40 | MCS0      | 1               | 134     | 5670        | 60.84                | 23.98                                |

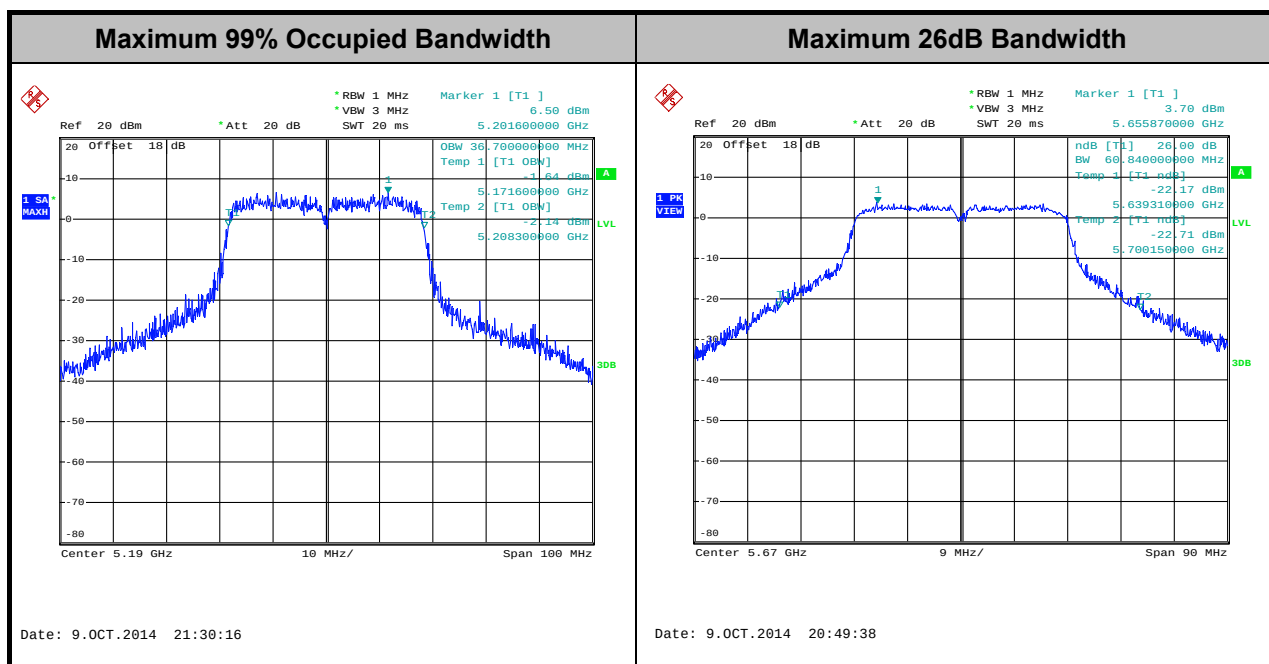

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


**3.1.6 Test Result of 20dB Occupied Bandwidth**

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | 20dB Bandwidth (MHz) | 20dB Bandwidth Upper Frequency (FH) (MHz) | Upper Limit Line (MHz) | Pass/Fail |
|------|-----------|-----------------|---------|-------------|----------------------|-------------------------------------------|------------------------|-----------|
| 11a  | 6Mbps     | 1               | 48      | 5240        | 19.88                | 5249.89                                   | 5250                   | Pass      |
| HT20 | MCS0      | 1               | 48      | 5240        | 19.93                | 5249.89                                   |                        | Pass      |
| HT40 | MCS0      | 1               | 46      | 5230        | 39.83                | 5249.87                                   |                        | Pass      |




## 20dB Occupied Bandwidth


## 802.11a CH48 5240MHz

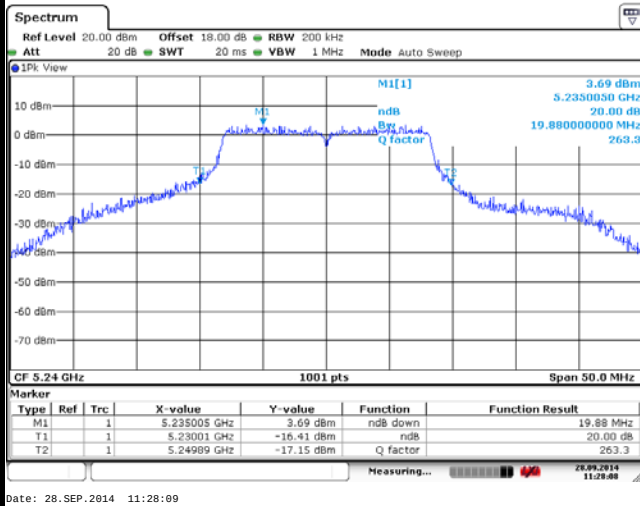

## 802.11n HT20 CH48 5240MHz

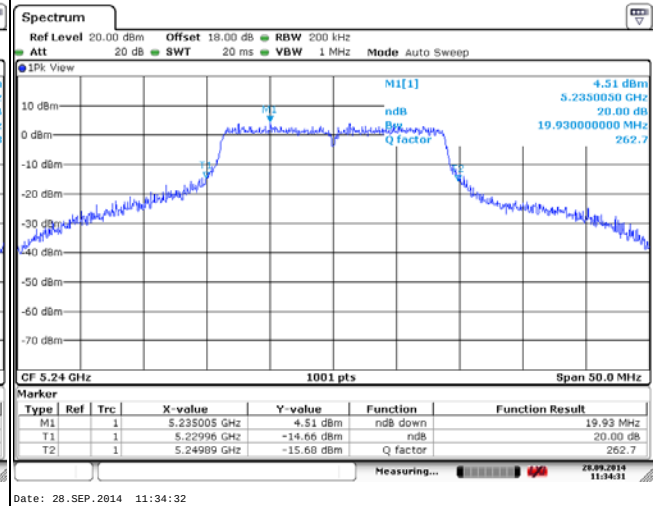

## 802.11n HT40 CH46 5230MHz

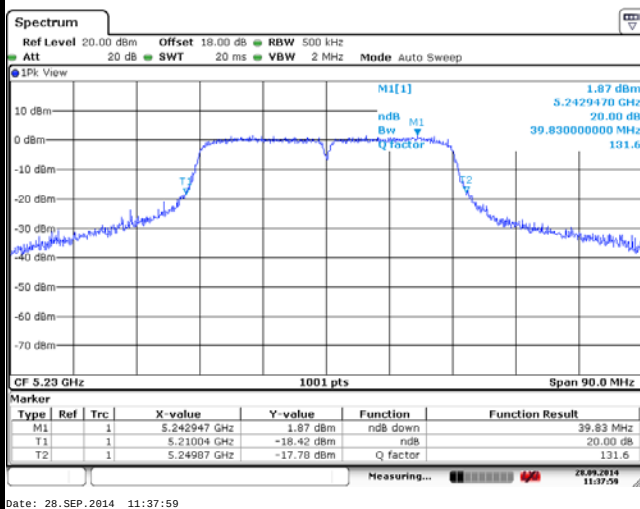

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

#### <FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

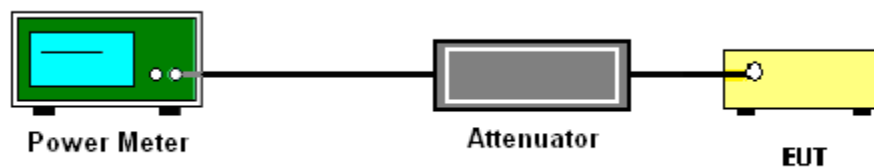



## 3.2.5 Test Result of Maximum Conducted Output Power

|                 |             |                     |        |
|-----------------|-------------|---------------------|--------|
| Test Band :     | 5GHz band 1 | Temperature :       | 24~26℃ |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | Pass/Fail |
|------|-----------|-----------------|---------|-------------|------------------|-------------------------------|---------------------------------|----------|-----------|
| 11a  | 6Mbps     | 1               | 36      | 5180        | 0.31             | 12.20                         | 23.98                           | -8.60    | Pass      |
| 11a  | 6Mbps     | 1               | 44      | 5220        | 0.31             | 12.27                         | 23.98                           | -8.60    | Pass      |
| 11a  | 6Mbps     | 1               | 48      | 5240        | 0.31             | 12.37                         | 23.98                           | -8.60    | Pass      |
| HT20 | MCS0      | 1               | 36      | 5180        | 0.32             | 11.74                         | 23.98                           | -8.60    | Pass      |
| HT20 | MCS0      | 1               | 44      | 5220        | 0.32             | 11.88                         | 23.98                           | -8.60    | Pass      |
| HT20 | MCS0      | 1               | 48      | 5240        | 0.32             | 12.00                         | 23.98                           | -8.60    | Pass      |
| HT40 | MCS0      | 1               | 38      | 5190        | 0.63             | 10.20                         | 23.98                           | -8.60    | Pass      |
| HT40 | MCS0      | 1               | 46      | 5230        | 0.63             | 10.35                         | 23.98                           | -8.60    | Pass      |

|                 |             |                     |        |
|-----------------|-------------|---------------------|--------|
| Test Band :     | 5GHz band 2 | Temperature :       | 24~26℃ |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | Pass/Fail |
|------|-----------|-----------------|---------|-------------|------------------|-------------------------------|---------------------------------|----------|-----------|
| 11a  | 6Mbps     | 1               | 52      | 5260        | 0.31             | 12.48                         | 23.98                           | -8.60    | Pass      |
| 11a  | 6Mbps     | 1               | 60      | 5300        | 0.31             | 12.11                         | 23.98                           | -8.60    | Pass      |
| 11a  | 6Mbps     | 1               | 64      | 5320        | 0.31             | 12.86                         | 23.98                           | -8.60    | Pass      |
| HT20 | MCS0      | 1               | 52      | 5260        | 0.32             | 12.10                         | 23.98                           | -8.60    | Pass      |
| HT20 | MCS0      | 1               | 60      | 5300        | 0.32             | 11.77                         | 23.98                           | -8.60    | Pass      |
| HT20 | MCS0      | 1               | 64      | 5320        | 0.32             | 12.30                         | 23.98                           | -8.60    | Pass      |
| HT40 | MCS0      | 1               | 54      | 5270        | 0.63             | 10.61                         | 23.98                           | -8.60    | Pass      |
| HT40 | MCS0      | 1               | 62      | 5310        | 0.63             | 10.71                         | 23.98                           | -8.60    | Pass      |



|                        |             |                            |        |
|------------------------|-------------|----------------------------|--------|
| <b>Test Band :</b>     | 5GHz band 3 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Fly Liang   | <b>Relative Humidity :</b> | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | Duty<br>Factor<br>(dB) | Average<br>Conducted<br>Power<br>(dBm) | FCC<br>Conducted<br>Power Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|---------|----------------|------------------------|----------------------------------------|------------------------------------------|-------------|-----------|
| 11a  | 6Mbps     | 1               | 100     | 5500           | 0.31                   | 11.07                                  | 23.98                                    | -12.30      | Pass      |
| 11a  | 6Mbps     | 1               | 116     | 5580           | 0.31                   | 10.70                                  | 23.98                                    | -12.30      | Pass      |
| 11a  | 6Mbps     | 1               | 140     | 5700           | 0.31                   | 10.61                                  | 23.98                                    | -12.30      | Pass      |
| HT20 | MCS0      | 1               | 100     | 5500           | 0.32                   | 10.57                                  | 23.98                                    | -12.30      | Pass      |
| HT20 | MCS0      | 1               | 116     | 5580           | 0.32                   | 10.67                                  | 23.98                                    | -12.30      | Pass      |
| HT20 | MCS0      | 1               | 140     | 5700           | 0.32                   | 10.49                                  | 23.98                                    | -12.30      | Pass      |
| HT40 | MCS0      | 1               | 102     | 5510           | 0.63                   | 9.10                                   | 23.98                                    | -12.30      | Pass      |
| HT40 | MCS0      | 1               | 110     | 5550           | 0.63                   | 9.07                                   | 23.98                                    | -12.30      | Pass      |
| HT40 | MCS0      | 1               | 134     | 5670           | 0.63                   | 9.06                                   | 23.98                                    | -12.30      | Pass      |



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.


Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

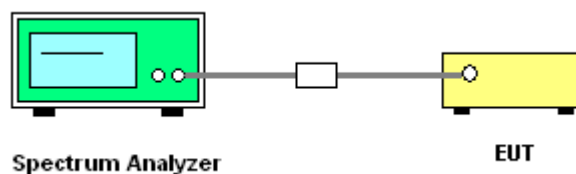



## 3.3.5 Test Result of Power Spectral Density

|                 |             |                     |        |
|-----------------|-------------|---------------------|--------|
| Test Band :     | 5GHz band 1 | Temperature :       | 24~26℃ |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | CH | Freq.<br>(MHz) | Duty<br>Factor<br>(dB) | Average<br>Power<br>Density<br>(dBm/MHz) | Average<br>PSD<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|----|----------------|------------------------|------------------------------------------|----------------------------------|-------------|-----------|
| 11a  | 6Mbps     | 1               | 36 | 5180           | 0.31                   | 4.07                                     | 11.00                            | -8.60       | Pass      |
| 11a  | 6Mbps     | 1               | 44 | 5220           | 0.31                   | 3.97                                     | 11.00                            | -8.60       | Pass      |
| 11a  | 6Mbps     | 1               | 48 | 5240           | 0.31                   | 3.67                                     | 11.00                            | -8.60       | Pass      |
| HT20 | MCS0      | 1               | 36 | 5180           | 0.32                   | 2.83                                     | 11.00                            | -8.60       | Pass      |
| HT20 | MCS0      | 1               | 44 | 5220           | 0.32                   | 3.16                                     | 11.00                            | -8.60       | Pass      |
| HT20 | MCS0      | 1               | 48 | 5240           | 0.32                   | 2.80                                     | 11.00                            | -8.60       | Pass      |
| HT40 | MCS0      | 1               | 38 | 5190           | 0.63                   | -1.60                                    | 11.00                            | -8.60       | Pass      |
| HT40 | MCS0      | 1               | 46 | 5230           | 0.63                   | -1.64                                    | 11.00                            | -8.60       | Pass      |


|                 |             |                     |        |
|-----------------|-------------|---------------------|--------|
| Test Band :     | 5GHz band 2 | Temperature :       | 24~26℃ |
| Test Engineer : | Fly Liang   | Relative Humidity : | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | CH | Freq.<br>(MHz) | Duty<br>Factor<br>(dB) | Average<br>Power<br>Density<br>(dBm/MHz) | Average<br>PSD<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|----|----------------|------------------------|------------------------------------------|----------------------------------|-------------|-----------|
| 11a  | 6Mbps     | 1               | 52 | 5260           | 0.31                   | 3.79                                     | 11.00                            | -8.60       | Pass      |
| 11a  | 6Mbps     | 1               | 60 | 5300           | 0.31                   | 3.34                                     | 11.00                            | -8.60       | Pass      |
| 11a  | 6Mbps     | 1               | 64 | 5320           | 0.31                   | 4.14                                     | 11.00                            | -8.60       | Pass      |
| HT20 | MCS0      | 1               | 52 | 5260           | 0.32                   | 2.98                                     | 11.00                            | -8.60       | Pass      |
| HT20 | MCS0      | 1               | 60 | 5300           | 0.32                   | 2.36                                     | 11.00                            | -8.60       | Pass      |
| HT20 | MCS0      | 1               | 64 | 5320           | 0.32                   | 2.77                                     | 11.00                            | -8.60       | Pass      |
| HT40 | MCS0      | 1               | 54 | 5270           | 0.63                   | -1.56                                    | 11.00                            | -8.60       | Pass      |
| HT40 | MCS0      | 1               | 62 | 5310           | 0.63                   | -1.52                                    | 11.00                            | -8.60       | Pass      |



|                        |             |                            |        |
|------------------------|-------------|----------------------------|--------|
| <b>Test Band :</b>     | 5GHz band 3 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Fly Liang   | <b>Relative Humidity :</b> | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | CH  | Freq.<br>(MHz) | Duty<br>Factor<br>(dB) | Average<br>Power<br>Density<br>(dBm/MHz) | Average<br>PSD<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|-----|----------------|------------------------|------------------------------------------|----------------------------------|-------------|-----------|
| 11a  | 6Mbps     | 1               | 100 | 5500           | 0.31                   | -0.65                                    | 11.00                            | -12.30      | Pass      |
| 11a  | 6Mbps     | 1               | 116 | 5580           | 0.31                   | -1.43                                    | 11.00                            | -12.30      | Pass      |
| 11a  | 6Mbps     | 1               | 140 | 5700           | 0.31                   | -2.22                                    | 11.00                            | -12.30      | Pass      |
| HT20 | MCS0      | 1               | 100 | 5500           | 0.32                   | -2.15                                    | 11.00                            | -12.30      | Pass      |
| HT20 | MCS0      | 1               | 116 | 5580           | 0.32                   | -2.28                                    | 11.00                            | -12.30      | Pass      |
| HT20 | MCS0      | 1               | 140 | 5700           | 0.32                   | -2.69                                    | 11.00                            | -12.30      | Pass      |
| HT40 | MCS0      | 1               | 102 | 5510           | 0.63                   | -5.72                                    | 11.00                            | -12.30      | Pass      |
| HT40 | MCS0      | 1               | 110 | 5550           | 0.63                   | -5.65                                    | 11.00                            | -12.30      | Pass      |
| HT40 | MCS0      | 1               | 134 | 5670           | 0.63                   | -5.70                                    | 11.00                            | -12.30      | Pass      |

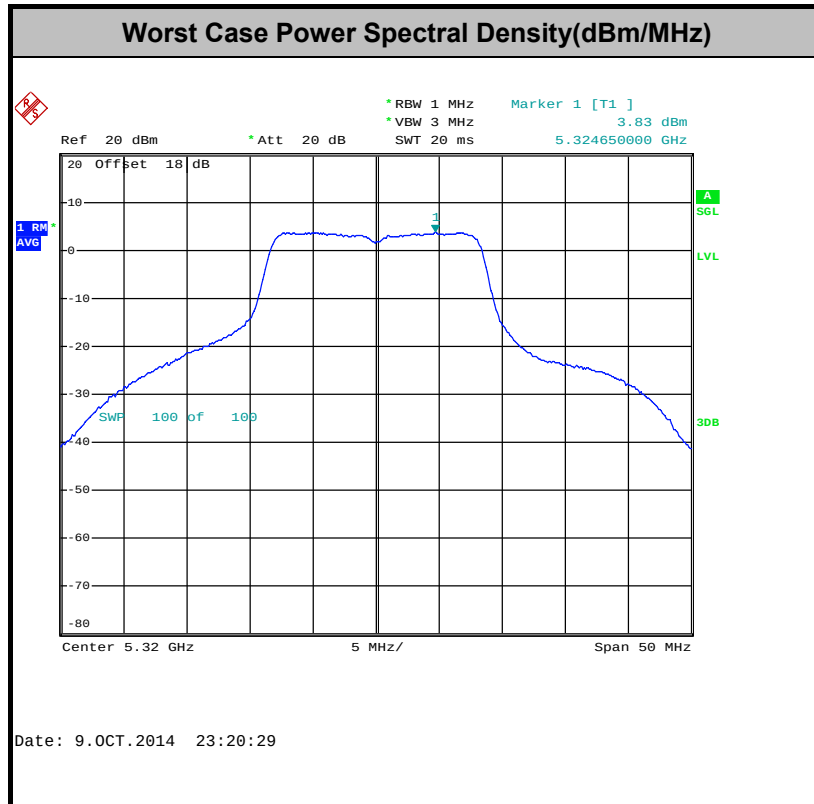

**Note:** Average Power Density (dB) = Measured value+ Duty Factor

### 3.4 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

| EIRP (dBm) | Field Strength at 3m (dB $\mu$ V/m) |
|------------|-------------------------------------|
| -17        | 78.3                                |
| - 27       | 68.3                                |

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

| Band         | Duty Cycle(%) | T( $\mu$ s) | 1/T(kHz) | VBW Setting |
|--------------|---------------|-------------|----------|-------------|
| 802.11a      | 93.05         | 1.39        | 0.72     | 1kHz        |
| 802.11n HT20 | 92.88         | 1.30        | 0.77     | 1kHz        |
| 802.11n HT40 | 86.45         | 0.64        | 1.57     | 3kHz        |


2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


**For radiated emissions below 30MHz**

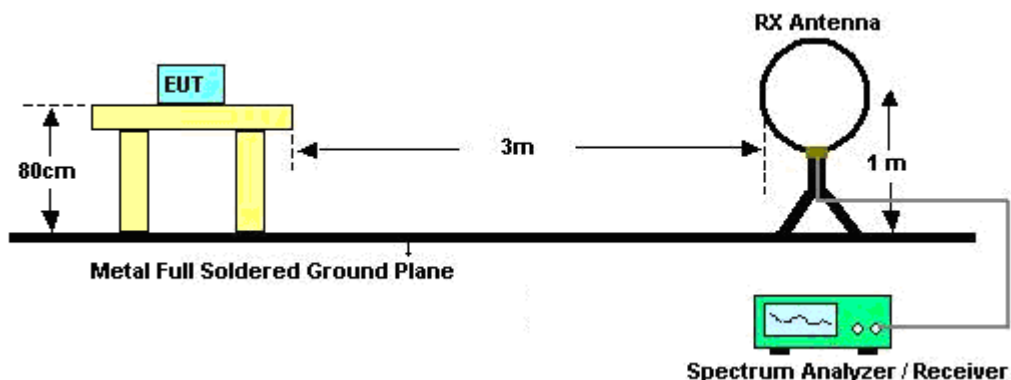

For radiated emissions from 30MHz to 1GHz

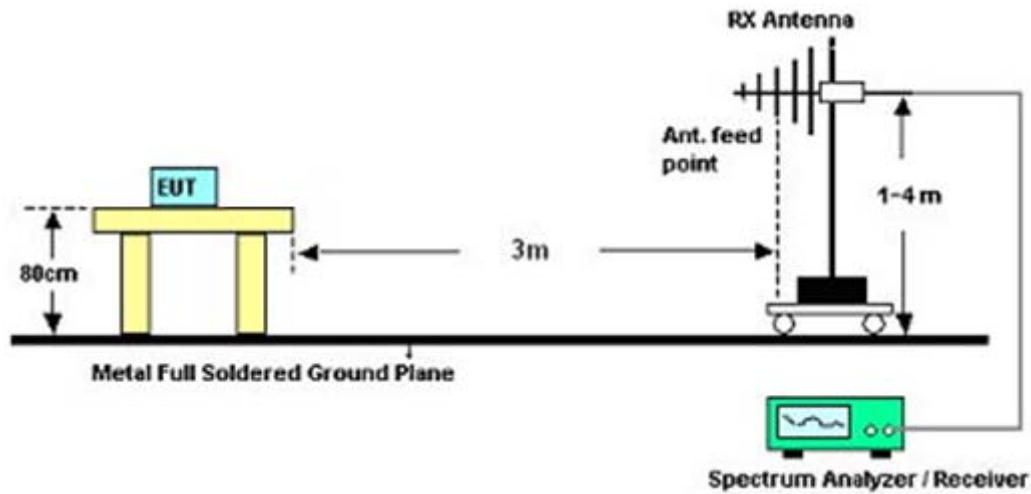

For radiated emissions above 1GHz

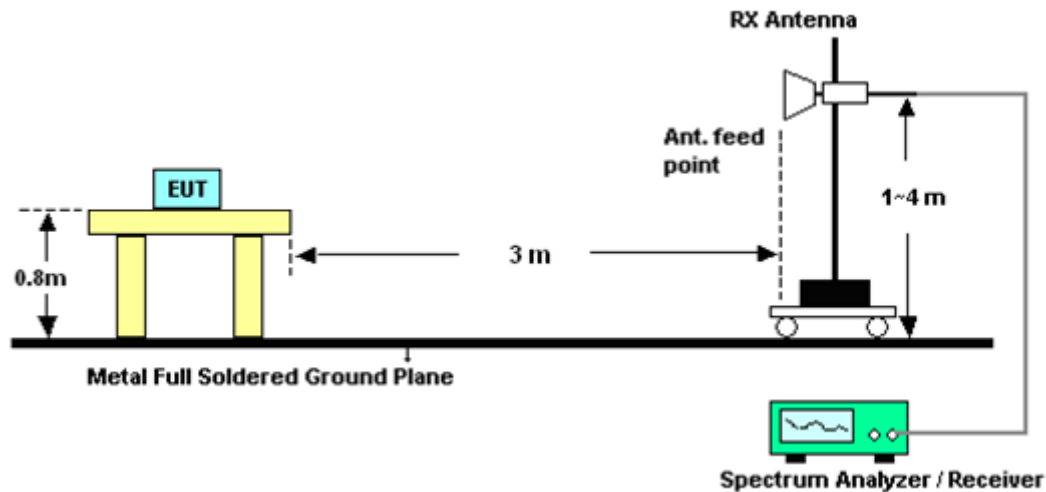

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.4.6 Test Result

#### 3.4.6.1 Test Result of Radiated Band Edges

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 802.11a  | Temperature :       | 22~23°C |
| Test Channel :  | 36       | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5148.45                       | 68.95               | -5.05                   | 74                          | 68.59                     | 34.32                       | 3.9                     | 37.86                      | 100                  | 152                     | Peak    |
| 5150                          | 46.56               | -7.44                   | 54                          | 46.2                      | 34.32                       | 3.9                     | 37.86                      | 100                  | 152                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5149.8                      | 70.4                | -3.6                    | 74                          | 70.04                     | 34.32                       | 3.9                     | 37.86                      | 100                  | 180                     | Peak    |
| 5149.95                     | 49.24               | -4.76                   | 54                          | 48.88                     | 34.32                       | 3.9                     | 37.86                      | 100                  | 180                     | Average |

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 802.11a  | Temperature :       | 22~23°C |
| Test Channel :  | 48       | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5387                          | 48.37               | -25.63                  | 74                          | 49.26                     | 34.4                        | 4.02                    | 39.31                      | 109                  | 152                     | Peak    |
| 5385.25                       | 36.02               | -17.98                  | 54                          | 36.91                     | 34.4                        | 4.02                    | 39.31                      | 109                  | 152                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5371.1                      | 47.93               | -26.07                  | 74                          | 48.72                     | 34.4                        | 4.01                    | 39.2                       | 100                  | 168                     | Peak    |
| 5386.45                     | 36.08               | -17.92                  | 54                          | 36.97                     | 34.4                        | 4.02                    | 39.31                      | 100                  | 168                     | Average |



|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 802.11a  | Temperature :       | 22~23°C |
| Test Channel :  | 52       | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5110.05                       | 48.89               | -25.11                  | 74                          | 48.46                     | 34.29                       | 3.87                    | 37.73                      | 107                  | 151                     | Peak    |
| 5110.05                       | 36.64               | -17.36                  | 54                          | 36.21                     | 34.29                       | 3.87                    | 37.73                      | 107                  | 151                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5135.2                      | 49.1                | -24.9                   | 74                          | 48.71                     | 34.31                       | 3.88                    | 37.8                       | 100                  | 165                     | Peak    |
| 5111.15                     | 36.77               | -17.23                  | 54                          | 36.34                     | 34.29                       | 3.87                    | 37.73                      | 100                  | 165                     | Average |

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 802.11a  | Temperature :       | 22~23°C |
| Test Channel :  | 64       | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5350.95                       | 65.92               | -8.08                   | 74                          | 66.6                      | 34.4                        | 4                       | 39.08                      | 106                  | 148                     | Peak    |
| 5350                          | 43.79               | -10.21                  | 54                          | 44.47                     | 34.4                        | 4                       | 39.08                      | 106                  | 148                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5350.1                      | 68.92               | -5.08                   | 74                          | 69.6                      | 34.4                        | 4                       | 39.08                      | 107                  | 169                     | Peak    |
| 5350.15                     | 46.65               | -7.35                   | 54                          | 47.33                     | 34.4                        | 4                       | 39.08                      | 107                  | 169                     | Average |



|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 802.11a  | Temperature :       | 22~23°C |
| Test Channel :  | 100      | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5470                          | 52.04               | -21.96                  | 74                          | 52.7                      | 34.4                        | 4                       | 39.06                      | 100                  | 141                     | Peak    |
| 5470                          | 37.1                | -16.9                   | 54                          | 37.76                     | 34.4                        | 4                       | 39.06                      | 100                  | 141                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5470                        | 53.81               | -20.19                  | 74                          | 54.47                     | 34.4                        | 4                       | 39.06                      | 104                  | 202                     | Peak    |
| 5470                        | 37.64               | -16.36                  | 54                          | 38.3                      | 34.4                        | 4                       | 39.06                      | 104                  | 202                     | Average |

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 802.11a  | Temperature :       | 22~23°C |
| Test Channel :  | 140      | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5725                          | 50.54               | -23.46                  | 74                          | 50.44                     | 34.59                       | 4.15                    | 38.64                      | 100                  | 169                     | Peak    |
| 5725                          | 37.47               | -16.53                  | 54                          | 37.37                     | 34.59                       | 4.15                    | 38.64                      | 100                  | 169                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5725                        | 51.64               | -22.36                  | 74                          | 51.54                     | 34.59                       | 4.15                    | 38.64                      | 100                  | 26                      | Peak    |
| 5725                        | 37.73               | -16.27                  | 54                          | 37.63                     | 34.59                       | 4.15                    | 38.64                      | 100                  | 26                      | Average |



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT20 | Temperature :       | 22~23°C |
| Test Channel :  | 36           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5149.8                        | 68.64               | -5.36                   | 74                          | 68.28                     | 34.32                       | 3.9                     | 37.86                      | 112                  | 151                     | Peak    |
| 5149.8                        | 45.68               | -8.32                   | 54                          | 45.32                     | 34.32                       | 3.9                     | 37.86                      | 112                  | 150                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5148.8                      | 65.74               | -8.26                   | 74                          | 65.38                     | 34.32                       | 3.9                     | 37.86                      | 100                  | 0                       | Peak    |
| 5150                        | 44.79               | -9.21                   | 54                          | 44.43                     | 34.32                       | 3.9                     | 37.86                      | 100                  | 0                       | Average |

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT20 | Temperature :       | 22~23°C |
| Test Channel :  | 48           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5373.5                        | 47.98               | -26.02                  | 74                          | 48.77                     | 34.4                        | 4.01                    | 39.2                       | 131                  | 149                     | Peak    |
| 5385.2                        | 35.87               | -18.13                  | 54                          | 36.76                     | 34.4                        | 4.02                    | 39.31                      | 131                  | 149                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5394.75                     | 47.11               | -26.89                  | 74                          | 48.1                      | 34.4                        | 4.03                    | 39.42                      | 123                  | 157                     | Peak    |
| 5362.55                     | 35.93               | -18.07                  | 54                          | 36.72                     | 34.4                        | 4.01                    | 39.2                       | 123                  | 157                     | Average |



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT20 | Temperature :       | 22~23°C |
| Test Channel :  | 52           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5133.6                        | 48.44               | -25.56                  | 74                          | 48.05                     | 34.31                       | 3.88                    | 37.8                       | 103                  | 121                     | Peak    |
| 5111.85                       | 36.81               | -17.19                  | 54                          | 36.38                     | 34.29                       | 3.87                    | 37.73                      | 103                  | 121                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5146.5                      | 48.78               | -25.22                  | 74                          | 48.42                     | 34.32                       | 3.9                     | 37.86                      | 100                  | 162                     | Peak    |
| 5134.3                      | 36.83               | -17.17                  | 54                          | 36.44                     | 34.31                       | 3.88                    | 37.8                       | 100                  | 162                     | Average |

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT20 | Temperature :       | 22~23°C |
| Test Channel :  | 64           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5354.85                       | 60.37               | -13.63                  | 74                          | 61.05                     | 34.4                        | 4                       | 39.08                      | 167                  | 206                     | Peak    |
| 5350.05                       | 40.09               | -13.91                  | 54                          | 40.77                     | 34.4                        | 4                       | 39.08                      | 167                  | 206                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5351.05                     | 64.9                | -9.1                    | 74                          | 65.58                     | 34.4                        | 4                       | 39.08                      | 108                  | 192                     | Peak    |
| 5350                        | 43.17               | -10.83                  | 54                          | 43.85                     | 34.4                        | 4                       | 39.08                      | 108                  | 192                     | Average |



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT20 | Temperature :       | 22~23°C |
| Test Channel :  | 100          | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5470                          | 49.77               | -24.23                  | 74                          | 50.43                     | 34.4                        | 4                       | 39.06                      | 147                  | 145                     | Peak    |
| 5470                          | 36.61               | -17.39                  | 54                          | 37.27                     | 34.4                        | 4                       | 39.06                      | 147                  | 145                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5470                        | 49.07               | -24.93                  | 74                          | 49.73                     | 34.4                        | 4                       | 39.06                      | 103                  | 226                     | Peak    |
| 5470                        | 36.74               | -17.26                  | 54                          | 37.4                      | 34.4                        | 4                       | 39.06                      | 103                  | 226                     | Average |

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT20 | Temperature :       | 22~23°C |
| Test Channel :  | 140          | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5725                          | 50.43               | -23.57                  | 74                          | 49.4                      | 35.52                       | 4.15                    | 38.64                      | 106                  | 144                     | Peak    |
| 5725                          | 38.49               | -15.51                  | 54                          | 37.46                     | 35.52                       | 4.15                    | 38.64                      | 106                  | 144                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5725                        | 50.66               | -23.34                  | 74                          | 49.63                     | 35.52                       | 4.15                    | 38.64                      | 100                  | 172                     | Peak    |
| 5725                        | 38.41               | -15.59                  | 54                          | 37.38                     | 35.52                       | 4.15                    | 38.64                      | 100                  | 172                     | Average |



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT40 | Temperature :       | 22~23°C |
| Test Channel :  | 38           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5149.75                       | 69.17               | -4.83                   | 74                          | 67.88                     | 35.25                       | 3.9                     | 37.86                      | 100                  | 183                     | Peak    |
| 5150                          | 50.97               | -3.03                   | 54                          | 49.68                     | 35.25                       | 3.9                     | 37.86                      | 100                  | 184                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5149.75                     | 68.83               | -5.17                   | 74                          | 67.54                     | 35.25                       | 3.9                     | 37.86                      | 200                  | 168                     | Peak    |
| 5149.75                     | 50.2                | -3.8                    | 54                          | 48.91                     | 35.25                       | 3.9                     | 37.86                      | 200                  | 168                     | Average |

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT40 | Temperature :       | 22~23°C |
| Test Channel :  | 46           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5377.2                        | 49.25               | -24.75                  | 74                          | 49.1                      | 35.33                       | 4.02                    | 39.2                       | 100                  | 191                     | Peak    |
| 5385.25                       | 37.36               | -16.64                  | 54                          | 37.31                     | 35.34                       | 4.02                    | 39.31                      | 100                  | 191                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5376.8                      | 49.17               | -24.83                  | 74                          | 49.02                     | 35.33                       | 4.02                    | 39.2                       | 100                  | 193                     | Peak    |
| 5350.5                      | 37.35               | -16.65                  | 54                          | 37.11                     | 35.32                       | 4                       | 39.08                      | 100                  | 193                     | Average |



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT40 | Temperature :       | 22~23°C |
| Test Channel :  | 54           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5104.1                        | 50.41               | -23.59                  | 74                          | 48.99                     | 35.23                       | 3.86                    | 37.67                      | 100                  | 158                     | Peak    |
| 5109.05                       | 37.96               | -16.04                  | 54                          | 36.59                     | 35.23                       | 3.87                    | 37.73                      | 100                  | 158                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5110.65                     | 50.13               | -23.87                  | 74                          | 48.76                     | 35.23                       | 3.87                    | 37.73                      | 100                  | 188                     | Peak    |
| 5110.45                     | 37.82               | -16.18                  | 54                          | 36.45                     | 35.23                       | 3.87                    | 37.73                      | 100                  | 188                     | Average |

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT40 | Temperature :       | 22~23°C |
| Test Channel :  | 62           | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5353.15                       | 69.02               | -4.98                   | 74                          | 68.78                     | 35.32                       | 4                       | 39.08                      | 100                  | 125                     | Peak    |
| 5350                          | 49.91               | -4.09                   | 54                          | 49.67                     | 35.32                       | 4                       | 39.08                      | 100                  | 125                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5350.35                     | 63.69               | -10.31                  | 74                          | 63.45                     | 35.32                       | 4                       | 39.08                      | 100                  | 190                     | Peak    |
| 5350.6                      | 45.26               | -8.74                   | 54                          | 45.02                     | 35.32                       | 4                       | 39.08                      | 100                  | 190                     | Average |



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT40 | Temperature :       | 22~23°C |
| Test Channel :  | 102          | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5470                          | 63.64               | -10.36                  | 74                          | 63.31                     | 35.39                       | 4                       | 39.06                      | 100                  | 207                     | Peak    |
| 5470                          | 44.46               | -9.54                   | 54                          | 44.13                     | 35.39                       | 4                       | 39.06                      | 100                  | 207                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5470                        | 59.67               | -14.33                  | 74                          | 59.34                     | 35.39                       | 4                       | 39.06                      | 100                  | 149                     | Peak    |
| 5470                        | 41.72               | -12.28                  | 54                          | 41.39                     | 35.39                       | 4                       | 39.06                      | 100                  | 149                     | Average |

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | 802.11n HT40 | Temperature :       | 22~23°C |
| Test Channel :  | 134          | Relative Humidity : | 42~43%  |
| Test Engineer : | Simon Lu     |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5725                          | 49.39               | -24.61                  | 74                          | 48.36                     | 35.52                       | 4.15                    | 38.64                      | 100                  | 327                     | Peak    |
| 5725                          | 38.1                | -15.9                   | 54                          | 37.07                     | 35.52                       | 4.15                    | 38.64                      | 100                  | 327                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 5725                        | 48.06               | -25.94                  | 74                          | 47.03                     | 35.52                       | 4.15                    | 38.64                      | 100                  | 148                     | Peak    |
| 5725                        | 37.77               | -16.23                  | 54                          | 36.74                     | 35.52                       | 4.15                    | 38.64                      | 100                  | 148                     | Average |

### 3.4.6.2 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

|                        |                                                                                                                                                                   |                            |            |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                                           | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 36                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5180 MHz is fundamental signal which can be ignored.<br>2. 10360 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5180                 | 95.78               | -                       | -                           | 95.51                   | 34.35                       | 3.92                    | 38                         | 100                  | 151                     | Peak    |
| 5180                 | 84.13               | -                       | -                           | 83.86                   | 34.35                       | 3.92                    | 38                         | 100                  | 151                     | Average |
| 10360                | 55.84               | -18.16                  | 74                          | 85.3                    | 1.46                        | 5.85                    | 36.77                      | 167                  | 156                     | Peak    |
| 10360                | 37.44               | -16.56                  | 54                          | 66.9                    | 1.46                        | 5.85                    | 36.77                      | 167                  | 156                     | Average |

|                        |                                                                                                                                                                                                                                                                |                            |          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                                                                                                                                        | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 36                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5180 MHz is fundamental signal which can be ignored.<br>2. 10360 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5180                 | 98.04               | -                       | -                           | 97.77                   | 34.35                       | 3.92                    | 38                         | 100                  | 181                     | Peak    |
| 5180                 | 86.92               | -                       | -                           | 86.65                   | 34.35                       | 3.92                    | 38                         | 100                  | 181                     | Average |
| 10360                | 49.73               | -24.27                  | 74                          | 79.19                   | 1.46                        | 5.85                    | 36.77                      | 100                  | 124                     | Peak    |



|                 |                                                                                                                                                                   |                     |            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Test Mode :     | 802.11a                                                                                                                                                           | Temperature :       | 22~23°C    |
| Test Channel :  | 44                                                                                                                                                                | Relative Humidity : | 42~43%     |
| Test Engineer : | Simon Lu                                                                                                                                                          | Polarization :      | Horizontal |
| Remark :        | 1. 5220 MHz is fundamental signal which can be ignored.<br>2. 10440 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                     |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5220                 | 95.96               | -                       | -                           | 95.82                   | 34.37                       | 3.95                    | 38.18                      | 100                  | 156                     | Peak    |
| 5220                 | 84.46               | -                       | -                           | 84.32                   | 34.37                       | 3.95                    | 38.18                      | 100                  | 156                     | Average |
| 10440                | 56.99               | -17.01                  | 74                          | 86.39                   | 1.53                        | 5.89                    | 36.82                      | 122                  | 115                     | Peak    |
| 10440                | 39.99               | -14.01                  | 54                          | 69.39                   | 1.53                        | 5.89                    | 36.82                      | 122                  | 115                     | Average |

|                 |                                                                                                                                                                   |                     |          |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Test Mode :     | 802.11a                                                                                                                                                           | Temperature :       | 22~23°C  |
| Test Channel :  | 44                                                                                                                                                                | Relative Humidity : | 42~43%   |
| Test Engineer : | Simon Lu                                                                                                                                                          | Polarization :      | Vertical |
| Remark :        | 1. 5220 MHz is fundamental signal which can be ignored.<br>2. 10440 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                     |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5220                 | 99.13               | -                       | -                           | 98.99                   | 34.37                       | 3.95                    | 38.18                      | 100                  | 180                     | Peak    |
| 5220                 | 87.79               | -                       | -                           | 87.65                   | 34.37                       | 3.95                    | 38.18                      | 100                  | 180                     | Average |
| 10440                | 53.91               | -20.09                  | 74                          | 83.31                   | 1.53                        | 5.89                    | 36.82                      | 100                  | 316                     | Peak    |
| 10440                | 36.47               | -17.53                  | 54                          | 65.87                   | 1.53                        | 5.89                    | 36.82                      | 100                  | 316                     | Average |



|                        |                                                                                                                                                                   |                            |            |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                                           | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 48                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5240 MHz is fundamental signal which can be ignored.<br>2. 10480 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5240                 | 95.29               | -                       | -                           | 95.24                   | 34.39                       | 3.95                    | 38.29                      | 109                  | 152                     | Peak    |
| 5240                 | 82.79               | -                       | -                           | 82.74                   | 34.39                       | 3.95                    | 38.29                      | 109                  | 152                     | Average |
| 10480                | 56.86               | -17.14                  | 74                          | 86.29                   | 1.56                        | 5.92                    | 36.91                      | 121                  | 120                     | Peak    |
| 10480                | 39.99               | -14.01                  | 54                          | 69.42                   | 1.56                        | 5.92                    | 36.91                      | 121                  | 120                     | Average |

|                        |                                                                                                                                                                   |                            |          |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                                           | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 48                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5240 MHz is fundamental signal which can be ignored.<br>2. 10480 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5240                 | 98.6                | -                       | -                           | 98.55                   | 34.39                       | 3.95                    | 38.29                      | 100                  | 168                     | Peak    |
| 5240                 | 87.39               | -                       | -                           | 87.34                   | 34.39                       | 3.95                    | 38.29                      | 100                  | 168                     | Average |
| 10480                | 53.74               | -20.26                  | 74                          | 83.17                   | 1.56                        | 5.92                    | 36.91                      | 100                  | 0                       | Peak    |
| 10480                | 37.24               | -16.76                  | 54                          | 66.67                   | 1.56                        | 5.92                    | 36.91                      | 100                  | 0                       | Average |



|                        |                                                                                                                                                                                                                                                                |                            |            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                                                                                                                                        | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 52                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5260 MHz is fundamental signal which can be ignored.<br>2. 10520 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5260                 | 95.24               | -                       | -                           | 95.4                    | 34.4                        | 3.96                    | 38.52                      | 107                  | 151                     | Peak    |
| 5260                 | 84.29               | -                       | -                           | 84.45                   | 34.4                        | 3.96                    | 38.52                      | 107                  | 151                     | Average |
| 10520                | 50.81               | -23.19                  | 74                          | 80.26                   | 1.58                        | 5.94                    | 36.97                      | 103                  | 231                     | Peak    |

|                        |                                                                                                                                                                   |                            |          |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                                           | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 52                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5260 MHz is fundamental signal which can be ignored.<br>2. 10520 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5260                 | 98.74               | -                       | -                           | 98.9                    | 34.4                        | 3.96                    | 38.52                      | 100                  | 165                     | Peak    |
| 5260                 | 86.8                | -                       | -                           | 86.96                   | 34.4                        | 3.96                    | 38.52                      | 100                  | 165                     | Average |
| 10520                | 55.95               | -18.05                  | 74                          | 85.4                    | 1.58                        | 5.94                    | 36.97                      | 100                  | 352                     | Peak    |
| 10520                | 38.45               | -15.55                  | 54                          | 67.9                    | 1.58                        | 5.94                    | 36.97                      | 100                  | 352                     | Average |



|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 60                                                   | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 5300 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5300                 | 95.16               | -                       | -                           | 95.52                   | 34.4                        | 3.98                    | 38.74                      | 106                  | 148                     | Peak    |
| 5300                 | 82.88               | -                       | -                           | 83.24                   | 34.4                        | 3.98                    | 38.74                      | 106                  | 148                     | Average |
| 10600                | 54.95               | -19.05                  | 74                          | 84.44                   | 1.66                        | 5.96                    | 37.11                      | 153                  | 160                     | Peak    |
| 10600                | 39.63               | -14.37                  | 54                          | 69.12                   | 1.66                        | 5.96                    | 37.11                      | 153                  | 160                     | Average |

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 60                                                   | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 5300 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5300                 | 94.61               | -                       | -                           | 94.97                   | 34.4                        | 3.98                    | 38.74                      | 100                  | 175                     | Peak    |
| 5300                 | 83.73               | -                       | -                           | 84.09                   | 34.4                        | 3.98                    | 38.74                      | 100                  | 175                     | Average |
| 10600                | 54.87               | -19.13                  | 74                          | 84.36                   | 1.66                        | 5.96                    | 37.11                      | 104                  | 2                       | Peak    |
| 10600                | 38.65               | -15.35                  | 54                          | 68.14                   | 1.66                        | 5.96                    | 37.11                      | 104                  | 2                       | Average |



|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 64                                                   | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 5320 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5320                 | 94.63               | -                       | -                           | 95.1                    | 34.4                        | 3.99                    | 38.86                      | 106                  | 148                     | Peak    |
| 5320                 | 82.18               | -                       | -                           | 82.65                   | 34.4                        | 3.99                    | 38.86                      | 106                  | 148                     | Average |
| 10640                | 56.58               | -17.42                  | 74                          | 85.79                   | 1.7                         | 5.98                    | 36.89                      | 154                  | 152                     | Peak    |
| 10640                | 40.81               | -13.19                  | 54                          | 70.02                   | 1.7                         | 5.98                    | 36.89                      | 154                  | 152                     | Average |

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 64                                                   | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 5320 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5320                 | 96.84               | -                       | -                           | 97.31                   | 34.4                        | 3.99                    | 38.86                      | 107                  | 169                     | Peak    |
| 5320                 | 85.45               | -                       | -                           | 85.92                   | 34.4                        | 3.99                    | 38.86                      | 107                  | 169                     | Average |
| 10640                | 56.23               | -17.77                  | 74                          | 85.44                   | 1.7                         | 5.98                    | 36.89                      | 155                  | 357                     | Peak    |
| 10640                | 40.89               | -13.11                  | 54                          | 70.1                    | 1.7                         | 5.98                    | 36.89                      | 155                  | 357                     | Average |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 100                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5500 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5500                 | 89.27               | -                       | -                           | 89.75                   | 34.4                        | 4                       | 38.88                      | 100                  | 141                     | Peak    |
| 5500                 | 78.05               | -                       | -                           | 78.53                   | 34.4                        | 4                       | 38.88                      | 100                  | 141                     | Average |
| 11000                | 50.07               | -23.93                  | 74                          | 78.17                   | 2.21                        | 6.11                    | 36.42                      | 100                  | 153                     | Peak    |

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 100                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 5500 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5500                 | 91.83               | -                       | -                           | 92.31                   | 34.4                        | 4                       | 38.88                      | 104                  | 202                     | Peak    |
| 5500                 | 80.7                | -                       | -                           | 81.18                   | 34.4                        | 4                       | 38.88                      | 104                  | 202                     | Average |
| 11000                | 55.14               | -18.86                  | 74                          | 83.24                   | 2.21                        | 6.11                    | 36.42                      | 100                  | 27                      | Peak    |
| 11000                | 34                  | -20                     | 54                          | 62.1                    | 2.21                        | 6.11                    | 36.42                      | 100                  | 27                      | Average |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 116                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5580 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5580                 | 89.66               | -                       | -                           | 89.75                   | 34.46                       | 3.97                    | 38.52                      | 100                  | 141                     | Peak    |
| 5580                 | 76.74               | -                       | -                           | 76.83                   | 34.46                       | 3.97                    | 38.52                      | 100                  | 141                     | Average |
| 11160                | 43.73               | -30.27                  | 74                          | 70.56                   | 2.9                         | 6.19                    | 35.92                      | 164                  | 290                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 116                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5580 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5580                 | 90.98               | -                       | -                           | 91.07                   | 34.46                       | 3.97                    | 38.52                      | 102                  | 211                     | Peak    |
| 5580                 | 78.97               | -                       | -                           | 79.06                   | 34.46                       | 3.97                    | 38.52                      | 102                  | 211                     | Average |
| 11160                | 45.78               | -28.22                  | 74                          | 72.75                   | 2.82                        | 6.18                    | 35.97                      | 105                  | 308                     | Peak    |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 140                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5700 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5700                 | 88.14               | -                       | -                           | 88                      | 34.56                       | 4.13                    | 38.55                      | 100                  | 169                     | Peak    |
| 5700                 | 76.28               | -                       | -                           | 76.14                   | 34.56                       | 4.13                    | 38.55                      | 100                  | 169                     | Average |
| 11400                | 34.12               | -39.88                  | 74                          | 60.33                   | 4.13                        | 6.29                    | 36.63                      | 108                  | 95                      | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 140                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5700 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5700                 | 90.1                | -                       | -                           | 89.96                   | 34.56                       | 4.13                    | 38.55                      | 100                  | 26                      | Peak    |
| 5700                 | 78.16               | -                       | -                           | 78.02                   | 34.56                       | 4.13                    | 38.55                      | 100                  | 26                      | Average |
| 11400                | 38.48               | -35.52                  | 74                          | 64.69                   | 4.13                        | 6.29                    | 36.63                      | 137                  | 164                     | Peak    |



|                        |                                                                                                                                                                   |                            |            |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                                      | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 36                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5180 MHz is fundamental signal which can be ignored.<br>2. 10360 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5180                 | 94.81               | -                       | -                           | 94.54                   | 34.35                       | 3.92                    | 38                         | 112                  | 151                     | Peak    |
| 5180                 | 83.18               | -                       | -                           | 82.91                   | 34.35                       | 3.92                    | 38                         | 112                  | 151                     | Average |
| 10360                | 55.75               | -18.25                  | 74                          | 85.21                   | 1.46                        | 5.85                    | 36.77                      | 100                  | 158                     | Peak    |
| 10360                | 39.01               | -14.99                  | 54                          | 68.47                   | 1.46                        | 5.85                    | 36.77                      | 100                  | 158                     | Average |

|                        |                                                                                                                                                                   |                            |          |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                                      | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 36                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5180 MHz is fundamental signal which can be ignored.<br>2. 10360 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5180                 | 97.21               | -                       | -                           | 96.94                   | 34.35                       | 3.92                    | 38                         | 100                  | 0                       | Peak    |
| 5180                 | 84.2                | -                       | -                           | 83.93                   | 34.35                       | 3.92                    | 38                         | 100                  | 0                       | Average |
| 10360                | 54.84               | -19.16                  | 74                          | 84.3                    | 1.46                        | 5.85                    | 36.77                      | 100                  | 344                     | Peak    |
| 10360                | 37.07               | -16.93                  | 54                          | 66.53                   | 1.46                        | 5.85                    | 36.77                      | 100                  | 344                     | Average |



|                 |                                                                                                                                                                   |                     |            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Test Mode :     | 802.11n HT20                                                                                                                                                      | Temperature :       | 22~23°C    |
| Test Channel :  | 44                                                                                                                                                                | Relative Humidity : | 42~43%     |
| Test Engineer : | Simon Lu                                                                                                                                                          | Polarization :      | Horizontal |
| Remark :        | 1. 5220 MHz is fundamental signal which can be ignored.<br>2. 10440 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                     |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5220                 | 93.08               | -                       | -                           | 92.94                   | 34.37                       | 3.95                    | 38.18                      | 109                  | 201                     | Peak    |
| 5220                 | 80.86               | -                       | -                           | 80.72                   | 34.37                       | 3.95                    | 38.18                      | 109                  | 201                     | Average |
| 10440                | 54.27               | -19.73                  | 74                          | 83.67                   | 1.53                        | 5.89                    | 36.82                      | 113                  | 160                     | Peak    |
| 10440                | 36.78               | -17.22                  | 54                          | 66.18                   | 1.53                        | 5.89                    | 36.82                      | 113                  | 160                     | Average |

|                 |                                                                                                                                                                   |                     |          |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Test Mode :     | 802.11n HT20                                                                                                                                                      | Temperature :       | 22~23°C  |
| Test Channel :  | 44                                                                                                                                                                | Relative Humidity : | 42~43%   |
| Test Engineer : | Simon Lu                                                                                                                                                          | Polarization :      | Vertical |
| Remark :        | 1. 5220 MHz is fundamental signal which can be ignored.<br>2. 10440 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                     |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5220                 | 96.85               | -                       | -                           | 96.71                   | 34.37                       | 3.95                    | 38.18                      | 100                  | 165                     | Peak    |
| 5220                 | 84.51               | -                       | -                           | 84.37                   | 34.37                       | 3.95                    | 38.18                      | 100                  | 165                     | Average |
| 10440                | 53.47               | -20.53                  | 74                          | 82.87                   | 1.53                        | 5.89                    | 36.82                      | 101                  | 18                      | Peak    |
| 10440                | 35.96               | -18.04                  | 54                          | 65.36                   | 1.53                        | 5.89                    | 36.82                      | 101                  | 18                      | Average |



|                 |                                                                                                                                                                   |                     |            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Test Mode :     | 802.11n HT20                                                                                                                                                      | Temperature :       | 22~23°C    |
| Test Channel :  | 48                                                                                                                                                                | Relative Humidity : | 42~43%     |
| Test Engineer : | Simon Lu                                                                                                                                                          | Polarization :      | Horizontal |
| Remark :        | 1. 5240 MHz is fundamental signal which can be ignored.<br>2. 10480 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                     |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5240                 | 92.33               | -                       | -                           | 92.28                   | 34.39                       | 3.95                    | 38.29                      | 131                  | 149                     | Peak    |
| 5240                 | 80.14               | -                       | -                           | 80.09                   | 34.39                       | 3.95                    | 38.29                      | 131                  | 149                     | Average |
| 10480                | 54.79               | -19.21                  | 74                          | 84.22                   | 1.56                        | 5.92                    | 36.91                      | 151                  | 156                     | Peak    |
| 10480                | 37.37               | -16.63                  | 54                          | 66.8                    | 1.56                        | 5.92                    | 36.91                      | 151                  | 156                     | Average |

|                 |                                                                                                                                                                   |                     |          |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Test Mode :     | 802.11n HT20                                                                                                                                                      | Temperature :       | 22~23°C  |
| Test Channel :  | 48                                                                                                                                                                | Relative Humidity : | 42~43%   |
| Test Engineer : | Simon Lu                                                                                                                                                          | Polarization :      | Vertical |
| Remark :        | 1. 5240 MHz is fundamental signal which can be ignored.<br>2. 10480 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                     |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5240                 | 94.68               | -                       | -                           | 94.63                   | 34.39                       | 3.95                    | 38.29                      | 123                  | 157                     | Peak    |
| 5240                 | 82.7                | -                       | -                           | 82.65                   | 34.39                       | 3.95                    | 38.29                      | 123                  | 157                     | Average |
| 10480                | 54.72               | -19.28                  | 74                          | 84.15                   | 1.56                        | 5.92                    | 36.91                      | 100                  | 347                     | Peak    |
| 10480                | 37.15               | -16.85                  | 54                          | 66.58                   | 1.56                        | 5.92                    | 36.91                      | 100                  | 347                     | Average |

|                        |                                                                                                                                                                   |                            |            |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                                      | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 52                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5260 MHz is fundamental signal which can be ignored.<br>2. 10520 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5260                 | 92.94               | -                       | -                           | 93.1                    | 34.4                        | 3.96                    | 38.52                      | 103                  | 121                     | Peak    |
| 5260                 | 80.59               | -                       | -                           | 80.75                   | 34.4                        | 3.96                    | 38.52                      | 103                  | 121                     | Average |
| 10520                | 53.54               | -20.46                  | 74                          | 82.99                   | 1.58                        | 5.94                    | 36.97                      | 148                  | 156                     | Peak    |
| 10520                | 36.52               | -17.48                  | 54                          | 65.97                   | 1.58                        | 5.94                    | 36.97                      | 148                  | 156                     | Average |

|                        |                                                                                                                                                                   |                            |          |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                                      | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 52                                                                                                                                                                | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5260 MHz is fundamental signal which can be ignored.<br>2. 10520 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5260                 | 94.35               | -                       | -                           | 94.51                   | 34.4                        | 3.96                    | 38.52                      | 100                  | 162                     | Peak    |
| 5260                 | 82.24               | -                       | -                           | 82.4                    | 34.4                        | 3.96                    | 38.52                      | 100                  | 162                     | Average |
| 10520                | 52.84               | -21.16                  | 74                          | 82.29                   | 1.58                        | 5.94                    | 36.97                      | 100                  | 25                      | Peak    |
| 10520                | 35.19               | -18.81                  | 54                          | 64.64                   | 1.58                        | 5.94                    | 36.97                      | 100                  | 25                      | Average |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 60                                                                                                                                                   | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5300 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5300                 | 91.31               | -                       | -                           | 91.67                   | 34.4                        | 3.98                    | 38.74                      | 118                  | 156                     | Peak    |
| 5300                 | 79.74               | -                       | -                           | 80.1                    | 34.4                        | 3.98                    | 38.74                      | 118                  | 156                     | Average |
| 10600                | 48.89               | -25.11                  | 74                          | 78.37                   | 1.64                        | 5.96                    | 37.08                      | 125                  | 146                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 60                                                                                                                                                   | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5300 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5300                 | 93.48               | -                       | -                           | 93.84                   | 34.4                        | 3.98                    | 38.74                      | 100                  | 186                     | Peak    |
| 5300                 | 82.17               | -                       | -                           | 82.53                   | 34.4                        | 3.98                    | 38.74                      | 100                  | 186                     | Average |
| 10600                | 49.47               | -24.53                  | 74                          | 78.95                   | 1.64                        | 5.96                    | 37.08                      | 157                  | 325                     | Peak    |



|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 64                                                   | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 5320 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5320                 | 90.06               | -                       | -                           | 90.53                   | 34.4                        | 3.99                    | 38.86                      | 167                  | 206                     | Peak    |
| 5320                 | 78.32               | -                       | -                           | 78.79                   | 34.4                        | 3.99                    | 38.86                      | 167                  | 206                     | Average |
| 10640                | 55.75               | -18.25                  | 74                          | 84.96                   | 1.7                         | 5.98                    | 36.89                      | 142                  | 151                     | Peak    |
| 10640                | 38.81               | -15.19                  | 54                          | 68.02                   | 1.7                         | 5.98                    | 36.89                      | 142                  | 151                     | Average |

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 64                                                   | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 5320 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5320                 | 93.49               | -                       | -                           | 93.96                   | 34.4                        | 3.99                    | 38.86                      | 108                  | 192                     | Peak    |
| 5320                 | 82.55               | -                       | -                           | 83.02                   | 34.4                        | 3.99                    | 38.86                      | 108                  | 192                     | Average |
| 10640                | 54.16               | -19.84                  | 74                          | 83.37                   | 1.7                         | 5.98                    | 36.89                      | 176                  | 0                       | Peak    |
| 10640                | 37.43               | -16.57                  | 54                          | 66.64                   | 1.7                         | 5.98                    | 36.89                      | 176                  | 0                       | Average |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 100                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5500 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5500                 | 87.78               | -                       | -                           | 88.26                   | 34.4                        | 4                       | 38.88                      | 147                  | 145                     | Peak    |
| 5500                 | 76.33               | -                       | -                           | 76.81                   | 34.4                        | 4                       | 38.88                      | 147                  | 145                     | Average |
| 11000                | 44.06               | -29.94                  | 74                          | 72.16                   | 2.21                        | 6.11                    | 36.42                      | 195                  | 138                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 100                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5500 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5500                 | 89.53               | -                       | -                           | 90.01                   | 34.4                        | 4                       | 38.88                      | 103                  | 226                     | Peak    |
| 5500                 | 77.6                | -                       | -                           | 78.08                   | 34.4                        | 4                       | 38.88                      | 103                  | 226                     | Average |
| 11000                | 48.47               | -25.53                  | 74                          | 76.57                   | 2.21                        | 6.11                    | 36.42                      | 120                  | 110                     | Peak    |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 116                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5580 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5580                 | 88.03               | -                       | -                           | 88.12                   | 34.46                       | 3.97                    | 38.52                      | 121                  | 148                     | Peak    |
| 5580                 | 76.55               | -                       | -                           | 76.64                   | 34.46                       | 3.97                    | 38.52                      | 121                  | 148                     | Average |
| 11160                | 35.75               | -38.25                  | 74                          | 62.59                   | 2.9                         | 6.18                    | 35.92                      | 130                  | 217                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 116                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5580 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5580                 | 89                  | -                       | -                           | 89.09                   | 34.46                       | 3.97                    | 38.52                      | 113                  | 12                      | Peak    |
| 5580                 | 77.25               | -                       | -                           | 77.34                   | 34.46                       | 3.97                    | 38.52                      | 113                  | 12                      | Average |
| 11160                | 40.86               | -33.14                  | 74                          | 67.69                   | 2.9                         | 6.19                    | 35.92                      | 171                  | 313                     | Peak    |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 140                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5700 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5700                 | 87.78               | -                       | -                           | 86.7                    | 35.5                        | 4.13                    | 38.55                      | 106                  | 143                     | Peak    |
| 5700                 | 75.91               | -                       | -                           | 74.83                   | 35.5                        | 4.13                    | 38.55                      | 106                  | 143                     | Average |
| 11400                | 33.41               | -40.59                  | 74                          | 59.62                   | 4.13                        | 6.29                    | 36.63                      | 102                  | 319                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT20                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 140                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5700 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5700                 | 88.24               | -                       | -                           | 87.16                   | 35.5                        | 4.13                    | 38.55                      | 100                  | 172                     | Peak    |
| 5700                 | 76.33               | -                       | -                           | 75.25                   | 35.5                        | 4.13                    | 38.55                      | 100                  | 172                     | Average |
| 11400                | 33.8                | -40.2                   | 74                          | 60.01                   | 4.13                        | 6.29                    | 36.63                      | 108                  | 341                     | Peak    |



|                        |                                                                                                                                                                                                                                                                                                                 |                            |            |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                                                                                                                                                                                    | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 38                                                                                                                                                                                                                                                                                                              | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                                                                        | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | <ol style="list-style-type: none"><li>5190 MHz is fundamental signal which can be ignored.</li><li>10380 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.</li><li>Average measurement was not performed if peak level went lower than the average limit.</li></ol> |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 54.25                | 25.02               | -14.98                  | 40                          | 50.82                   | 6.49                        | 0.31                    | 32.6                       | 100                  | 255                     | Peak    |
| 64.92                | 23.99               | -16.01                  | 40                          | 50.91                   | 5.2                         | 0.47                    | 32.59                      | -                    | -                       | Peak    |
| 102.75               | 25.54               | -17.96                  | 43.5                        | 46.88                   | 10.87                       | 0.43                    | 32.64                      | -                    | -                       | Peak    |
| 108.57               | 27.62               | -15.88                  | 43.5                        | 48.15                   | 11.68                       | 0.43                    | 32.64                      | -                    | -                       | Peak    |
| 199.75               | 23.41               | -20.09                  | 43.5                        | 46.17                   | 9                           | 0.71                    | 32.47                      | -                    | -                       | Peak    |
| 300.63               | 22.12               | -23.88                  | 46                          | 40.68                   | 13.02                       | 0.81                    | 32.39                      | -                    | -                       | Peak    |
| 5190                 | 91.29               | -                       | -                           | 90.11                   | 35.26                       | 3.92                    | 38                         | 100                  | 182                     | Peak    |
| 5190                 | 80.42               | -                       | -                           | 79.24                   | 35.26                       | 3.92                    | 38                         | 100                  | 182                     | Average |
| 10380                | 41.75               | -32.25                  | 74                          | 71.18                   | 1.48                        | 5.86                    | 36.77                      | 124                  | 210                     | Peak    |



|                        |                                                                                                                                                                                                                                                                |                            |          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                                                                                                                                   | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 38                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5190 MHz is fundamental signal which can be ignored.<br>2. 10380 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30                   | 22.69               | -17.31                  | 40                          | 37.16                   | 18                          | 0.19                    | 32.66                      | -                    | -                       | Peak    |
| 45.52                | 21.52               | -18.48                  | 40                          | 44.62                   | 9.25                        | 0.31                    | 32.66                      | -                    | -                       | Peak    |
| 56.19                | 25.71               | -14.29                  | 40                          | 52.02                   | 5.98                        | 0.31                    | 32.6                       | 123                  | 78                      | Peak    |
| 64.92                | 19.96               | -20.04                  | 40                          | 46.88                   | 5.2                         | 0.47                    | 32.59                      | -                    | -                       | Peak    |
| 103.72               | 23.23               | -20.27                  | 43.5                        | 44.43                   | 11.01                       | 0.43                    | 32.64                      | -                    | -                       | Peak    |
| 200.72               | 20.01               | -23.49                  | 43.5                        | 42.69                   | 9.04                        | 0.75                    | 32.47                      | -                    | -                       | Peak    |
| 5190                 | 90.24               | -                       | -                           | 89.06                   | 35.26                       | 3.92                    | 38                         | 200                  | 168                     | Peak    |
| 5190                 | 80.81               | -                       | -                           | 79.63                   | 35.26                       | 3.92                    | 38                         | 200                  | 168                     | Average |
| 10380                | 43.17               | -30.83                  | 74                          | 72.6                    | 1.48                        | 5.86                    | 36.77                      | 125                  | 83                      | Peak    |



|                        |                                                                                                                                                                                                                                                                |                            |            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                                                                                                                                   | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 46                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5230 MHz is fundamental signal which can be ignored.<br>2. 10460 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5230                 | 86.5                | -                       | -                           | 85.56                   | 35.28                       | 3.95                    | 38.29                      | 100                  | 191                     | Peak    |
| 5230                 | 75.82               | -                       | -                           | 74.88                   | 35.28                       | 3.95                    | 38.29                      | 100                  | 191                     | Average |
| 10460                | 40.9                | -33.1                   | 74                          | 70.32                   | 1.55                        | 5.91                    | 36.88                      | 198                  | 110                     | Peak    |

|                        |                                                                                                                                                                                                                                                                |                            |          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                                                                                                                                   | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 46                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5230 MHz is fundamental signal which can be ignored.<br>2. 10460 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5230                 | 86.85               | -                       | -                           | 85.91                   | 35.28                       | 3.95                    | 38.29                      | 100                  | 193                     | Peak    |
| 5230                 | 75.95               | -                       | -                           | 75.01                   | 35.28                       | 3.95                    | 38.29                      | 100                  | 193                     | Average |
| 10460                | 41.53               | -32.47                  | 74                          | 70.94                   | 1.54                        | 5.9                     | 36.85                      | 120                  | 132                     | Peak    |



|                        |                                                                                                                                                                                                                                                                |                            |            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                                                                                                                                   | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 54                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5270 MHz is fundamental signal which can be ignored.<br>2. 10540 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5270                 | 90.72               | -                       | -                           | 89.98                   | 35.29                       | 3.97                    | 38.52                      | 100                  | 158                     | Peak    |
| 5270                 | 79.85               | -                       | -                           | 79.11                   | 35.29                       | 3.97                    | 38.52                      | 100                  | 158                     | Average |
| 10540                | 38.78               | -35.22                  | 74                          | 68.25                   | 1.61                        | 5.95                    | 37.03                      | 195                  | 103                     | Peak    |

|                        |                                                                                                                                                                                                                                                                |                            |          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                                                                                                                                   | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 54                                                                                                                                                                                                                                                             | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                                                                                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5270 MHz is fundamental signal which can be ignored.<br>2. 10540 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.<br>3. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5270                 | 85.07               | -                       | -                           | 84.33                   | 35.29                       | 3.97                    | 38.52                      | 100                  | 188                     | Peak    |
| 5270                 | 73.94               | -                       | -                           | 73.2                    | 35.29                       | 3.97                    | 38.52                      | 100                  | 188                     | Average |
| 10540                | 39.22               | -34.78                  | 74                          | 68.68                   | 1.6                         | 5.94                    | 37                         | 165                  | 130                     | Peak    |



|                 |                                                                                                                                                      |                     |            |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Test Mode :     | 802.11n HT40                                                                                                                                         | Temperature :       | 22~23°C    |
| Test Channel :  | 62                                                                                                                                                   | Relative Humidity : | 42~43%     |
| Test Engineer : | Simon Lu                                                                                                                                             | Polarization :      | Horizontal |
| Remark :        | 1. 5310 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                     |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5310                 | 89.92               | -                       | -                           | 89.48                   | 35.31                       | 3.99                    | 38.86                      | 100                  | 125                     | Peak    |
| 5310                 | 79.23               | -                       | -                           | 78.79                   | 35.31                       | 3.99                    | 38.86                      | 100                  | 125                     | Average |
| 10620                | 39.24               | -34.76                  | 74                          | 68.59                   | 1.68                        | 5.97                    | 37                         | 125                  | 301                     | Peak    |

|                 |                                                                                                                                                      |                     |          |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Test Mode :     | 802.11n HT40                                                                                                                                         | Temperature :       | 22~23°C  |
| Test Channel :  | 62                                                                                                                                                   | Relative Humidity : | 42~43%   |
| Test Engineer : | Simon Lu                                                                                                                                             | Polarization :      | Vertical |
| Remark :        | 1. 5310 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                     |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5310                 | 84.28               | -                       | -                           | 83.84                   | 35.31                       | 3.99                    | 38.86                      | 100                  | 190                     | Peak    |
| 5310                 | 73.55               | -                       | -                           | 73.11                   | 35.31                       | 3.99                    | 38.86                      | 100                  | 190                     | Average |
| 10620                | 38.9                | -35.1                   | 74                          | 68.24                   | 1.68                        | 5.98                    | 37                         | 125                  | 319                     | Peak    |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 102                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5510 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5510                 | 89.71               | -                       | -                           | 89.19                   | 35.41                       | 3.99                    | 38.88                      | 100                  | 206                     | Peak    |
| 5510                 | 78.1                | -                       | -                           | 77.58                   | 35.41                       | 3.99                    | 38.88                      | 100                  | 206                     | Average |
| 11020                | 31.4                | -42.6                   | 74                          | 59.38                   | 2.27                        | 6.12                    | 36.37                      | 165                  | 251                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 102                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5510 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5510                 | 88.51               | -                       | -                           | 87.99                   | 35.41                       | 3.99                    | 38.88                      | 100                  | 150                     | Peak    |
| 5510                 | 76.55               | -                       | -                           | 76.03                   | 35.41                       | 3.99                    | 38.88                      | 100                  | 150                     | Average |
| 11020                | 32.31               | -41.69                  | 74                          | 60.29                   | 2.27                        | 6.12                    | 36.37                      | 109                  | 87                      | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 110                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5550 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5550                 | 83.73               | -                       | -                           | 82.92                   | 35.44                       | 3.98                    | 38.61                      | 100                  | 227                     | Peak    |
| 5550                 | 71.8                | -                       | -                           | 70.99                   | 35.44                       | 3.98                    | 38.61                      | 100                  | 227                     | Average |
| 11100                | 32.98               | -41.02                  | 74                          | 60.35                   | 2.6                         | 6.15                    | 36.12                      | 100                  | 250                     | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 110                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5550 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5550                 | 85.27               | -                       | -                           | 84.46                   | 35.44                       | 3.98                    | 38.61                      | 100                  | 123                     | Peak    |
| 5550                 | 72.5                | -                       | -                           | 71.69                   | 35.44                       | 3.98                    | 38.61                      | 100                  | 123                     | Average |
| 11100                | 32.88               | -41.12                  | 74                          | 60.25                   | 2.6                         | 6.15                    | 36.12                      | 100                  | 124                     | Peak    |



|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 134                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%     |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5670 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5670                 | 84.37               | -                       | -                           | 83.31                   | 35.5                        | 4.07                    | 38.51                      | 100                  | 350                     | Peak    |
| 5670                 | 73.15               | -                       | -                           | 72.09                   | 35.5                        | 4.07                    | 38.51                      | 100                  | 350                     | Average |
| 11340                | 35.25               | -38.75                  | 74                          | 61.52                   | 3.83                        | 6.26                    | 36.36                      | 100                  | 64                      | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11n HT40                                                                                                                                         | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 134                                                                                                                                                  | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Engineer :</b> | Simon Lu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5670 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5670                 | 81.11               | -                       | -                           | 80.05                   | 35.5                        | 4.07                    | 38.51                      | 100                  | 148                     | Peak    |
| 5670                 | 70.03               | -                       | -                           | 68.97                   | 35.5                        | 4.07                    | 38.51                      | 100                  | 148                     | Average |
| 11340                | 34.31               | -39.69                  | 74                          | 60.58                   | 3.83                        | 6.26                    | 36.36                      | 100                  | 59                      | Peak    |

### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

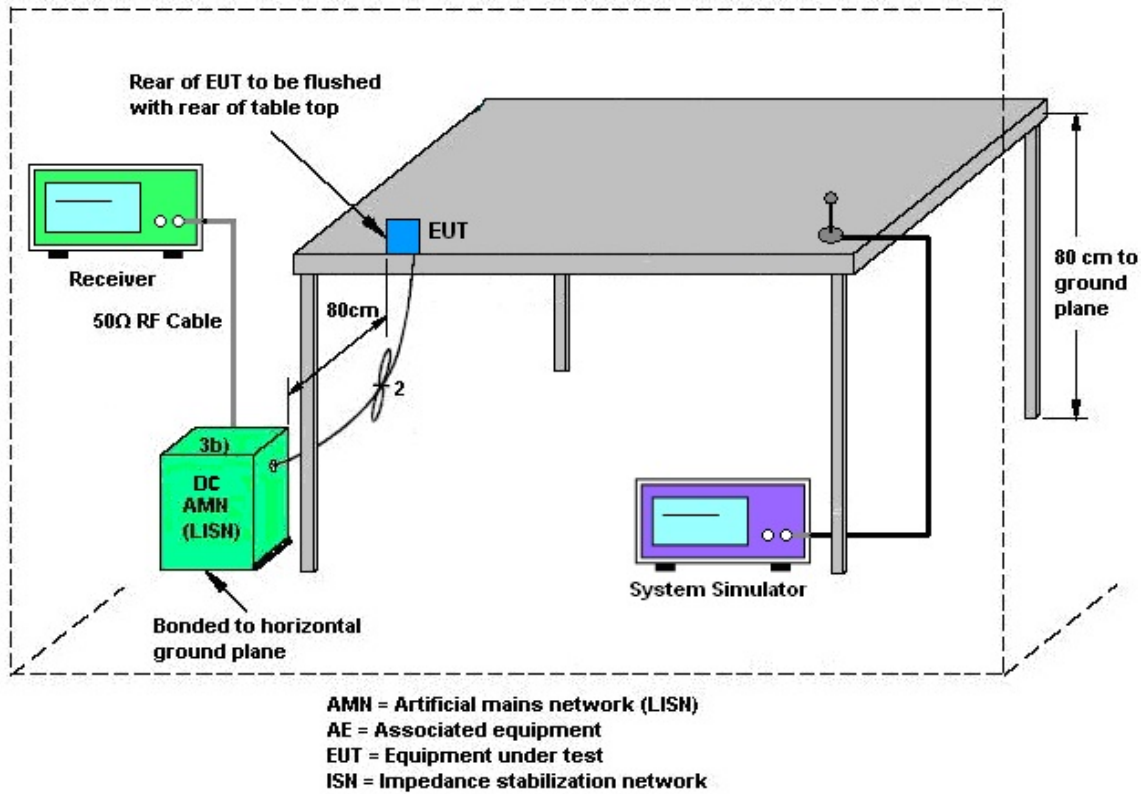



## 3.5.5 Test Result of AC Conducted Emission

|                 |                                                                                               |                     |        |
|-----------------|-----------------------------------------------------------------------------------------------|---------------------|--------|
| Test Mode :     | Mode 1                                                                                        | Temperature :       | 22~24℃ |
| Test Engineer : | Eligah Wang                                                                                   | Relative Humidity : | 55~58% |
| Test Voltage :  | 120Vac / 60Hz                                                                                 | Phase :             | Line   |
| Function Type : | GSM1900 Idle + Bluetooth Link + WLAN 5GHz Link + USB Cable (Charging from Adapter) + Earphone |                     |        |

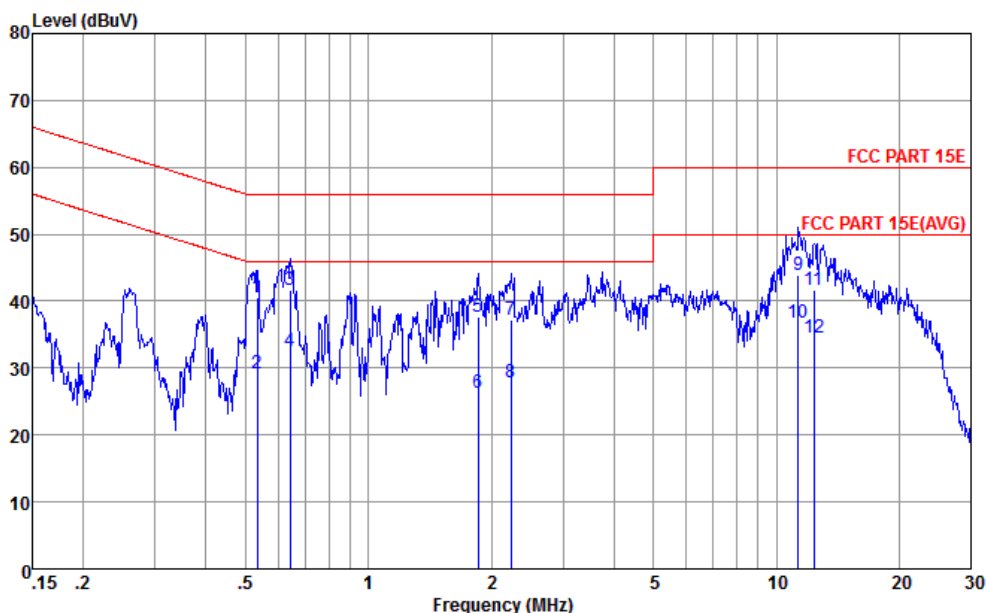


Site : CO01-KS  
Condition : FCC PART 15E LISN-L20140306 LINE

mode : Mode 1

|    | Freq  | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|-------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.53  | 40.46 | -15.54     | 56.00      | 30.00      | 0.20        | 10.26      | QP      |
| 2  | 0.53  | 29.16 | -16.84     | 46.00      | 18.70      | 0.20        | 10.26      | Average |
| 3  | 0.64  | 41.63 | -14.37     | 56.00      | 31.20      | 0.20        | 10.23      | QP      |
| 4  | 0.64  | 32.63 | -13.37     | 46.00      | 22.20      | 0.20        | 10.23      | Average |
| 5  | 1.86  | 37.59 | -18.41     | 56.00      | 27.30      | 0.10        | 10.19      | QP      |
| 6  | 1.86  | 26.19 | -19.81     | 46.00      | 15.90      | 0.10        | 10.19      | Average |
| 7  | 2.24  | 37.20 | -18.80     | 56.00      | 26.89      | 0.11        | 10.20      | QP      |
| 8  | 2.24  | 27.90 | -18.10     | 46.00      | 17.59      | 0.11        | 10.20      | Average |
| 9  | 11.32 | 43.95 | -16.05     | 60.00      | 33.40      | 0.20        | 10.35      | QP      |
| 10 | 11.32 | 36.85 | -13.15     | 50.00      | 26.30      | 0.20        | 10.35      | Average |
| 11 | 12.38 | 41.65 | -18.35     | 60.00      | 31.10      | 0.20        | 10.35      | QP      |
| 12 | 12.38 | 34.45 | -15.55     | 50.00      | 23.90      | 0.20        | 10.35      | Average |



|                 |                                                                                               |                     |         |
|-----------------|-----------------------------------------------------------------------------------------------|---------------------|---------|
| Test Mode :     | Mode 1                                                                                        | Temperature :       | 22~24℃  |
| Test Engineer : | Eligah Wang                                                                                   | Relative Humidity : | 55~58%  |
| Test Voltage :  | 120Vac / 60Hz                                                                                 | Phase :             | Neutral |
| Function Type : | GSM1900 Idle + Bluetooth Link + WLAN 5GHz Link + USB Cable (Charging from Adapter) + Earphone |                     |         |

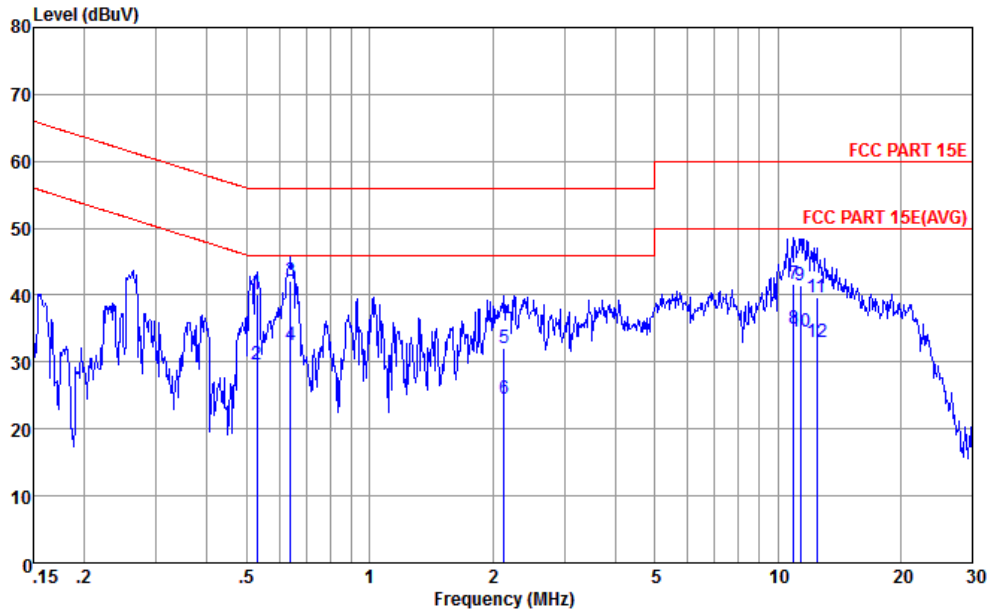

Site : CO01-KS  
Condition : FCC PART 15E LISN-N20140306 NEUTRAL

mode : Mode 1

|    | Freq  | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|-------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.53  | 40.16 | -15.84     | 56.00      | 29.61      | 0.29        | 10.26      | QP      |
| 2  | 0.53  | 29.66 | -16.34     | 46.00      | 19.11      | 0.29        | 10.26      | Average |
| 3  | 0.64  | 42.13 | -13.87     | 56.00      | 31.68      | 0.22        | 10.23      | QP      |
| 4  | 0.64  | 32.43 | -13.57     | 46.00      | 21.98      | 0.22        | 10.23      | Average |
| 5  | 2.13  | 32.09 | -23.91     | 56.00      | 21.80      | 0.10        | 10.19      | QP      |
| 6  | 2.13  | 24.49 | -21.51     | 46.00      | 14.20      | 0.10        | 10.19      | Average |
| 7  | 10.96 | 41.76 | -18.24     | 60.00      | 31.18      | 0.22        | 10.36      | QP      |
| 8  | 10.96 | 34.96 | -15.04     | 50.00      | 24.38      | 0.22        | 10.36      | Average |
| 9  | 11.38 | 41.45 | -18.55     | 60.00      | 30.87      | 0.23        | 10.35      | QP      |
| 10 | 11.38 | 34.45 | -15.55     | 50.00      | 23.87      | 0.23        | 10.35      | Average |
| 11 | 12.45 | 39.65 | -20.35     | 60.00      | 29.04      | 0.26        | 10.35      | QP      |
| 12 | 12.45 | 32.95 | -17.05     | 50.00      | 22.34      | 0.26        | 10.35      | Average |

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

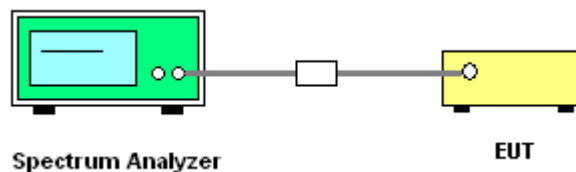



## 3.6.5 Test Result of Frequency Stability

|             |                 |                 |           |
|-------------|-----------------|-----------------|-----------|
| Test Band : | 5GHz band 1,2,3 | Test Engineer : | Fly Liang |
|-------------|-----------------|-----------------|-----------|

| Mod. | Data Rate | NTX | Channel | Freq. (MHz) | Center Frequency (MHz) | Frequency Deviation (MHz) | Frequency Stability (ppm) | Temperature (°C) | Voltage (V) |
|------|-----------|-----|---------|-------------|------------------------|---------------------------|---------------------------|------------------|-------------|
| 11a  | 6Mbps     | 1   | 36      | 5180        | 5180.050               | 0.050                     | 9.65                      | 20               | 3.6         |
| 11a  | 6Mbps     | 1   | 36      | 5180        | 5180.050               | 0.050                     | 9.65                      | 20               | 4.2         |
| 11a  | 6Mbps     | 1   | 36      | 5180        | 5180.000               | 0.000                     | 0.00                      | 20               | 3.8         |
| 11a  | 6Mbps     | 1   | 36      | 5180        | 5180.050               | 0.050                     | 9.65                      | -30              | 3.8         |
| 11a  | 6Mbps     | 1   | 36      | 5180        | 5180.000               | 0.000                     | 0.00                      | 50               | 3.8         |

| Mod. | Data Rate | NTX | Channel | Freq. (MHz) | Center Frequency (MHz) | Frequency Deviation (MHz) | Frequency Stability (ppm) | Temperature (°C) | Voltage (V) |
|------|-----------|-----|---------|-------------|------------------------|---------------------------|---------------------------|------------------|-------------|
| 11a  | 6Mbps     | 1   | 64      | 5320        | 5320.050               | 0.050                     | 9.40                      | 20               | 3.6         |
| 11a  | 6Mbps     | 1   | 64      | 5320        | 5320.000               | 0.000                     | 0.00                      | 20               | 4.2         |
| 11a  | 6Mbps     | 1   | 64      | 5320        | 5320.000               | 0.000                     | 0.00                      | 20               | 3.8         |
| 11a  | 6Mbps     | 1   | 64      | 5320        | 5320.050               | 0.050                     | 9.40                      | -30              | 3.8         |
| 11a  | 6Mbps     | 1   | 64      | 5320        | 5320.050               | 0.050                     | 9.40                      | 50               | 3.8         |

| Mod. | Data Rate | NTX | Channel | Freq. (MHz) | Center Frequency (MHz) | Frequency Deviation (MHz) | Frequency Stability (ppm) | Temperature (°C) | Voltage (V) |
|------|-----------|-----|---------|-------------|------------------------|---------------------------|---------------------------|------------------|-------------|
| 11a  | 6Mbps     | 1   | 100     | 5500        | 5500.050               | 0.050                     | 9.09                      | 20               | 3.6         |
| 11a  | 6Mbps     | 1   | 100     | 5500        | 5500.050               | 0.050                     | 9.09                      | 20               | 4.2         |
| 11a  | 6Mbps     | 1   | 100     | 5500        | 5500.050               | 0.050                     | 9.09                      | 20               | 3.8         |
| 11a  | 6Mbps     | 1   | 100     | 5500        | 5500.050               | 0.050                     | 9.09                      | -30              | 3.8         |
| 11a  | 6Mbps     | 1   | 100     | 5500        | 5500.000               | 0.000                     | 0.00                      | 50               | 3.8         |

**Note:** Center Frequency = (Low Frequency + High Frequency) / 2.

### **3.7 Automatically Discontinue Transmission**

#### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

#### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.8.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.8.3 Antenna Gain**

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipments

| Instrument                           | Manufacturer | Model No. | Serial No.       | Characteristics            | Calibration Date | Test Date                       | Due Date      | Remark                |
|--------------------------------------|--------------|-----------|------------------|----------------------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer                    | R&S          | FSP30     | 101400           | 9kHz~30GHz                 | Mar. 03, 2014    | Sep. 28, 2014~<br>Oct. 09, 2014 | Mar. 02, 2015 | Conducted (TH01-SZ)   |
| Spectrum Analyzer                    | R&S          | FSV40     | 101078           | 10Hz~40GHz                 | May 08, 2014     | Sep. 28, 2014~<br>Oct. 09, 2014 | May 07, 2015  | Conducted (TH01-SZ)   |
| Power Meter                          | Anritsu      | ML2495A   | 1218010          | 13dBm<br>~-20dBm           | Mar. 03, 2014    | Sep. 28, 2014~<br>Oct. 09, 2014 | Mar. 02, 2015 | Conducted (TH01-SZ)   |
| Power Sensor                         | Dare         | RPR3006W  | TH01SZ00<br>019  | 0.3GHz~6GHz                | Mar. 14, 2014    | Sep. 28, 2014~<br>Oct. 09, 2014 | Mar. 13, 2015 | Conducted (TH01-SZ)   |
| EMI Test Receiver                    | R&S          | ESCI      | 100534           | 9kHz~3GHz                  | Nov. 05, 2013    | Sep. 24, 2014~<br>Sep. 25, 2014 | Nov. 04, 2014 | Radiation (03CH01-KS) |
| Spectrum Analyzer                    | R&S          | FSP40     | 100319           | 9kHz~40GHz                 | Dec. 28, 2013    | Sep. 24, 2014~<br>Sep. 25, 2014 | Dec. 27, 2014 | Radiation (03CH01-KS) |
| Loop Antenna                         | R&S          | HFH2-Z2   | 100321           | 9kHz~30MHz                 | Oct. 09, 2013    | Sep. 24, 2014~<br>Sep. 25, 2014 | Oct. 08, 2014 | Radiation (03CH01-KS) |
| Bilog Antenna                        | SCHAFFNER    | CBL6112D  | 23182            | 25MHz~2GHz                 | Jan. 08, 2014    | Sep. 24, 2014~<br>Sep. 25, 2014 | Jan. 07, 2015 | Radiation (03CH01-KS) |
| Double Ridge Horn Antenna            | ETS-Lindgren | 3117      | 75959            | 1GHz~18GHz                 | Jan. 08, 2014    | Sep. 24, 2014~<br>Sep. 25, 2014 | Jan. 07, 2015 | Radiation (03CH01-KS) |
| Active Horn Antenna                  | com-power    | AHA-118   | 701030           | 1GHz~18GHz                 | Nov. 18, 2013    | Sep. 24, 2014~<br>Sep. 25, 2014 | Nov. 17, 2014 | Radiation (03CH01-KS) |
| SHF-EHF Horn                         | Schwarzbeck  | BBHA 9170 | BBHA1702<br>49   | 15GHz~40GHz                | Mar. 10, 2014    | Sep. 24, 2014~<br>Sep. 25, 2014 | Mar. 09, 2015 | Radiation (03CH01-KS) |
| Amplifier                            | com-power    | PA-103A   | 161073           | 1MHz~1GHz                  | May 04, 2014     | Sep. 24, 2014~<br>Sep. 25, 2014 | May 03, 2015  | Radiation (03CH01-KS) |
| Amplifier                            | Agilent      | 8449B     | 3008A023<br>71   | 1GHz~26.5GHz               | Dec. 10, 2013    | Sep. 24, 2014~<br>Sep. 25, 2014 | Dec. 09, 2014 | Radiation (03CH01-KS) |
| AC Power Source                      | Chroma       | 61601     | F1040900<br>04   | N/A                        | NCR              | Sep. 24, 2014~<br>Sep. 25, 2014 | NCR           | Radiation (03CH01-KS) |
| Turn Table                           | MF           | MF7802    | N/A              | 0~360 degree               | NCR              | Sep. 24, 2014~<br>Sep. 25, 2014 | NCR           | Radiation (03CH01-KS) |
| Antenna Mast                         | MF           | MF7802    | N/A              | 1 m~4 m                    | NCR              | Sep. 24, 2014~<br>Sep. 25, 2014 | NCR           | Radiation (03CH01-KS) |
| EMI Receiver                         | R&S          | ESCI7     | 100768           | 9kHz~7GHz;                 | May 04, 2014     | Sep. 07, 2014                   | May 03, 2015  | Conduction (CO01-KS)  |
| AC LISN                              | MessTec      | AN3016    | 060103           | 9kHz~30MHz                 | Dec. 10, 2013    | Sep. 07, 2014                   | Dec. 09, 2014 | Conduction (CO01-KS)  |
| AC LISN<br>(for auxiliary equipment) | MessTec      | AN3016    | 060105           | 9kHz~30MHz                 | Dec. 10, 2013    | Sep. 07, 2014                   | Dec. 09, 2014 | Conduction (CO01-KS)  |
| AC Power Source                      | Chroma       | 61602     | ABP00000<br>0811 | AC 0V~300V,<br>45Hz~1000Hz | Nov. 12, 2013    | Sep. 07, 2014                   | Nov. 11, 2014 | Conduction (CO01-KS)  |



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.3 |
|-------------------------------------------------------------------------|-----|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.5 |
|-------------------------------------------------------------------------|-----|