On your side

TEST REPORT

FCC DTS Test for SM-A507FN/DS

Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-1908-FC003-R2

DATE OF ISSUE
August 29, 2019

HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401

HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC DTS Test for SM-A507FN/DS

REPORT NO.
HCT-RF-1908-FC003-R2

DATE OF ISSUE
August 29, 2019

FCC ID
A3LSMA507FN

Applicant	SAMSUNG Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Eut Type Model Name	Mobile Phone SM-A507FN/DS
Average Output Power	802.11b : 19.68 dBm / 802.11g : 18.74 dBm / 802.11n(HT20) : 18.61 dBm
Modulation type	CCK/DSSS/OFDM
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Tested by
Jung Ki Lim (signature)

Technical Manager
Jong Seok Lee (signature)

HCT CO., LTD.
Soo Chan Lee
SooChan Lee / CEO
Accredited by KOLAS, Republic of KOREA

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 05, 2019	Initial Release
1	August 14, 2019	Revised the Radiated Restricted Band Edges
2	August 29, 2019	Added the ISO 17025 KOLAS logo.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Engineering Statement:
The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

CONTENTS

1. EUT DESCRIPTION 5
2. TEST METHODOLOGY 6
EUT CONFIGURATION 6
EUT EXERCISE 6
GENERAL TEST PROCEDURES 6
DESCRIPTION OF TEST MODES 7
3. INSTRUMENT CALIBRATION 7
4. FACILITIES AND ACCREDITATIONS 7
FACILITIES 7
EQUIPMENT 7
5. ANTENNA REQUIREMENTS 8
6. MEASUREMENT UNCERTAINTY 8
7. DESCRIPTION OF TESTS 9
8. SUMMARY TEST OF RESULTS 25
9. TEST RESULT 26
9.1 DUTY CYCLE 26
9.2 6dB BANDWIDTH 29
9.3 OUTPUT POWER 32
9.4 POWER SPECTRAL DENSITY 38
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 41
9.6 RADIATED SPURIOUS EMISSIONS 55
9.7 RADIATED RESTRICTED BAND EDGES 66
9.8 POWERLINE CONDUCTED EMISSIONS 78
10. LIST OF TEST EQUIPMENT 82
11. ANNEX A_ TEST SETUP PHOTO 84

1. EUT DESCRIPTION

Model	SM-A507FN/DS	
EUT Type	Mobile Phone	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BA505ABU Type: Li-ion Battery	
Travel Adapter Information	Model : EP-TA200 Manufacture: SOLUM	
Data Cable Information	Model : EP-DR140ABE Manufacture: KSD	
Ear-jack Information	Model : EHS61ASFBE Manufacture: FOSTER	
Frequency Range	2412 MHz - 2472 MHz	
Max. RF Output Power	Peak Power (For information only)	802.11b : 21.91 dBm 802.11g : 25.78 dBm 802.11n(HT20) : 26.48 dBm
	Average Power	802.11b : 19.68 dBm 802.11g : 18.74 dBm 802.11n(HT20) : 18.61 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n	
Number of Channels	13 Channels	
Antenna Specification	Antenna type: INTERNAL Peak Gain : -1.30 dBi	
Date(s) of Tests	July 12, 2019 ~ August 14, 2019	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpse of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.
Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.
Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.
Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.
All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of

ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (±dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

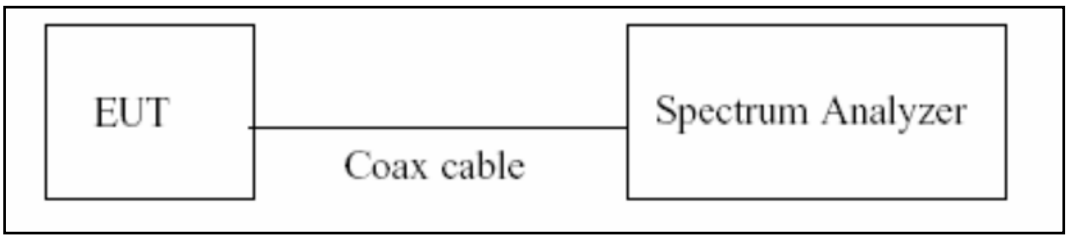

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest availble value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if T ≤ 6.25 microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/ *T*.

1. RBW = 8 MHz (the largest availble value)
2. VBW = 8 MHz (≥ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/ T_{total} and Duty Cycle Factor = 10*log(1/Duty Cycle)

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

1) RBW = 100 kHz
2) VBW ≥ 3 x RBW
3) Detector = Peak
4) Trace mode = max hold
5) Sweep = auto couple
6) Allow the trace to stabilize
7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

▪ Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)

: Measure the peak power of the transmitter.

▪ Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)

1) Measure the duty cycle.
2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

▪ Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss

▪ Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

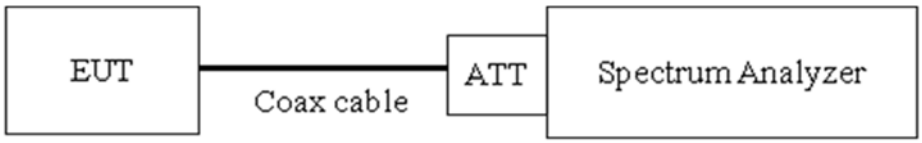

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

1) Set analyzer center frequency to DTS channel center frequency.
2) Set span to at least 1.5 times the OBW.
3) RBW = 3 kHz ≤ RBW ≤ 100 kHz.
4) VBW ≥ 3 x RBW.
5) Sweep = auto couple
6) Detector = power averaging (rms) or sample detector (when rms not available).
7) Ensure that the number of measurement points in the sweep ≥[2 ×span / RBW].
8) Employ trace averaging (rms) modeover a minimum of 100 traces
9) Use the peak marker function to determine the maximum amplitude level.
10) Use the peak marker function to determine the maximum amplitude level within the RBW.
    If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

Sample Calculation

▪ Power Spectral Density = Reading Value + ATT loss + Cable loss

7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least

30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

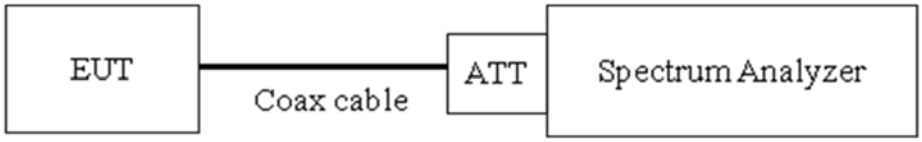

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

1) RBW = 100 kHz
2) VBW ≥ 3 x RBW
3) Set span to encompass the spectrum to be examined
4) Detector = Peak
5) Trace Mode = max hold
6) Sweep time = auto couple
7) Ensure that the number of measurement points ≥ 2*Span/RBW
8) Allow trace to fully stabilize.
9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53
26000	11.07

Note : 1. '*' is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration

Below 30 MHz

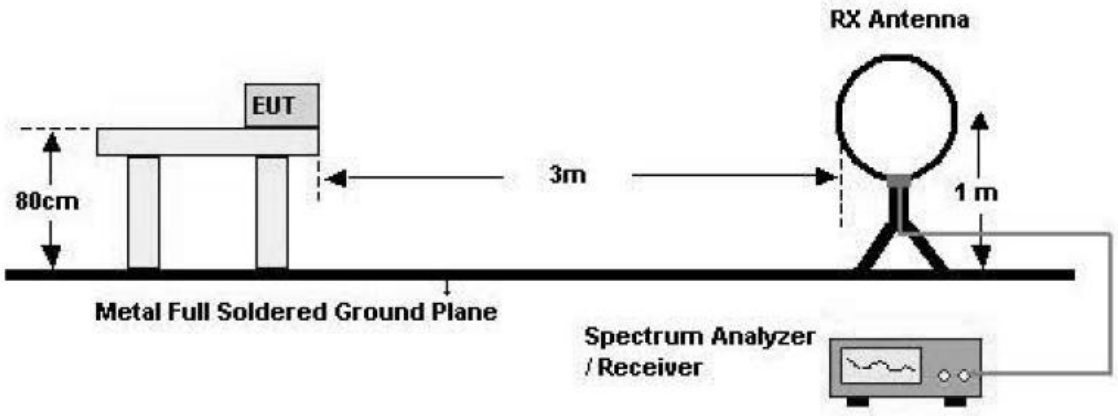

30 MHz - 1 GHz

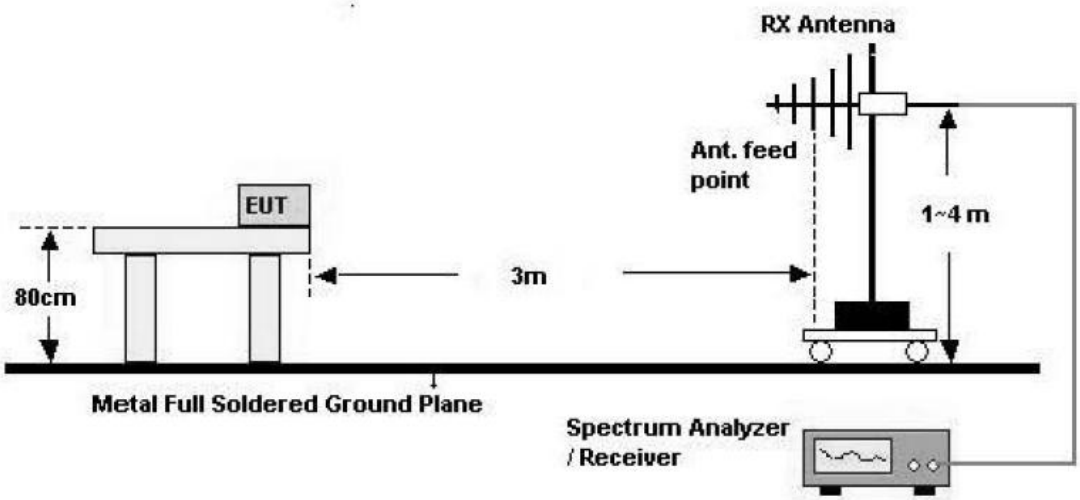

Above 1 GHz

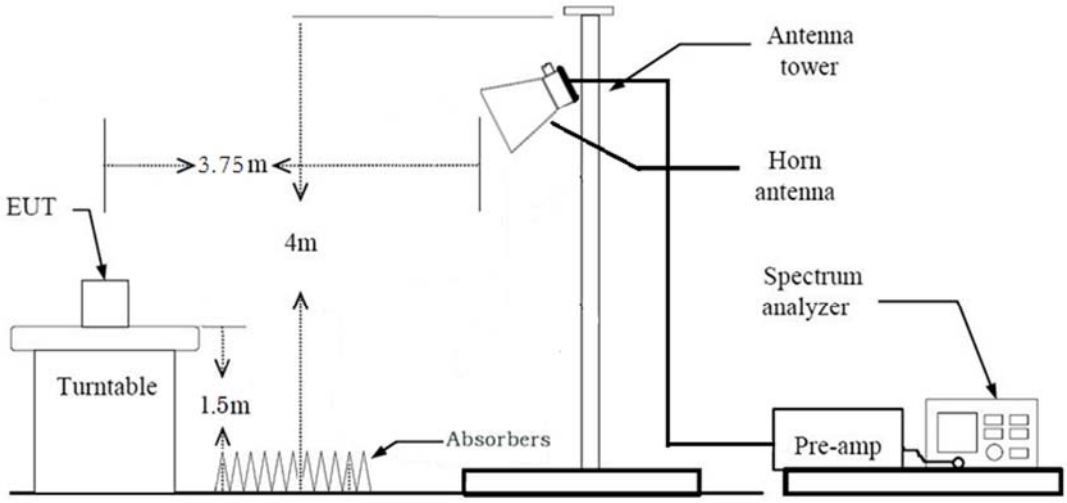

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = 40*log(3 m/300 m) = - 80 dB
   Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = 40*log(3 m/30 m) = - 40 dB
   Measurement Distance : 3 m
8. Spectrum Setting
   - Frequency Range = 9 kHz ~ 30 MHz
   - Detector = Peak
   - Trace = Maxhold
   - RBW = 9 kHz
   - VBW ≥ 3*RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 30 MHz – 1 GHz
      - Detector = Peak
      - Trace = Maxhold
      - RBW = 100 kHz
      - VBW ≥ 3*RBW
   (2) Measurement Type(Quasi-peak):
      - Measured Frequency Range : 30 MHz – 1 GHz
      - Detector = Quasi-Peak
      - RBW = 120 kHz
   *In general, (1) is used mainly
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
   *Distance extrapolation factor = 20*log (test distance / specific distance) (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 1 GHz – 25 GHz
      - Detector = Peak
      - Trace = Maxhold
      - RBW = 1 MHz
      - VBW ≥ 3*RBW
   (2) Measurement Type(Average): Duty cycle ≥ 98%
      - Measured Frequency Range : 1 GHz – 25 GHz
      - Detector = RMS
      - Averaging type = power (*i.e.*, RMS)
      - RBW = 1 MHz
      - VBW ≥ 3*RBW
      - Sweep time = auto.
      - Trace mode = average (at least 100 traces).

   (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than ±2%
      - Measured Frequency Range : 1 GHz – 25 GHz
      - Detector = RMS
      - Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz
- VBW ≥ 3*RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle ≥ 98%)
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = 20*log (test distance / specific distance) (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
      - Detector = Peak
      - Trace = Maxhold
      - RBW = 1 MHz
      - VBW ≥ 3*RBW
   (2) Measurement Type(Average): Duty cycle ≥ 98%,
      - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
      - Detector = RMS
      - Averaging type = power (*i.e.*, RMS)
      - RBW = 1 MHz
      - VBW ≥ 3*RBW
      - Sweep time = auto.
      - Trace mode = average (at least 100 traces).
   (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than ±2%
      - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
      - Detector = RMS
      - Averaging type = power (*i.e.*, RMS)
      - RBW = 1 MHz
      - VBW ≥ 3*RBW
      - Sweep time = auto.
      - Trace mode = average (at least 100 traces).
      - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
      - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G) +Attenuator(ATT)

Total(Measurement Type : Average, Duty cycle ≥ 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G) +Attenuator(ATT)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G) +Attenuator(ATT) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
   - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
   - Worstcase : Stand alone
2. EUT Axis
   - Radiated Spurious Emissions : Y
   - Radiated Restricted Band Edge : Z
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
   - 802.11b : 1Mbps
   - 802.11g : 6Mbps
   - 802.11n_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
   - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
   - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter, Stand alone + Travel Adapter
   - Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.618	8.648	0.997	0.015
	2	4.309	4.339	0.993	0.030
	5.5	1.629	1.656	0.984	0.072
	11	0.861	0.972	0.886	0.527
802.11g	6	1.427	1.530	0.933	0.301
	9	0.960	1.058	0.907	0.423
	12	0.723	0.836	0.865	0.631
	18	0.493	0.612	0.805	0.940
	24	0.372	0.491	0.757	1.211
	36	0.256	0.375	0.681	1.667
	48	0.196	0.315	0.624	2.051
	54	0.180	0.300	0.602	2.206
802.11n (HT20)	6.5 (MCS0)	1.337	1.457	0.918	0.373
	13 (MCS1)	0.688	0.787	0.874	0.585
	19.5 (MCS2)	0.473	0.592	0.798	0.979
	26 (MCS3)	0.364	0.484	0.752	1.237
	39 (MCS4)	0.256	0.375	0.682	1.659
	52 (MCS5)	0.200	0.320	0.626	2.033
	58.5 (MCS6)	0.184	0.303	0.607	2.165
	65 (MCS7)	0.168	0.287	0.587	2.315

▣ Test Plots

Duty cycle plot (802.11b(1Mbps))

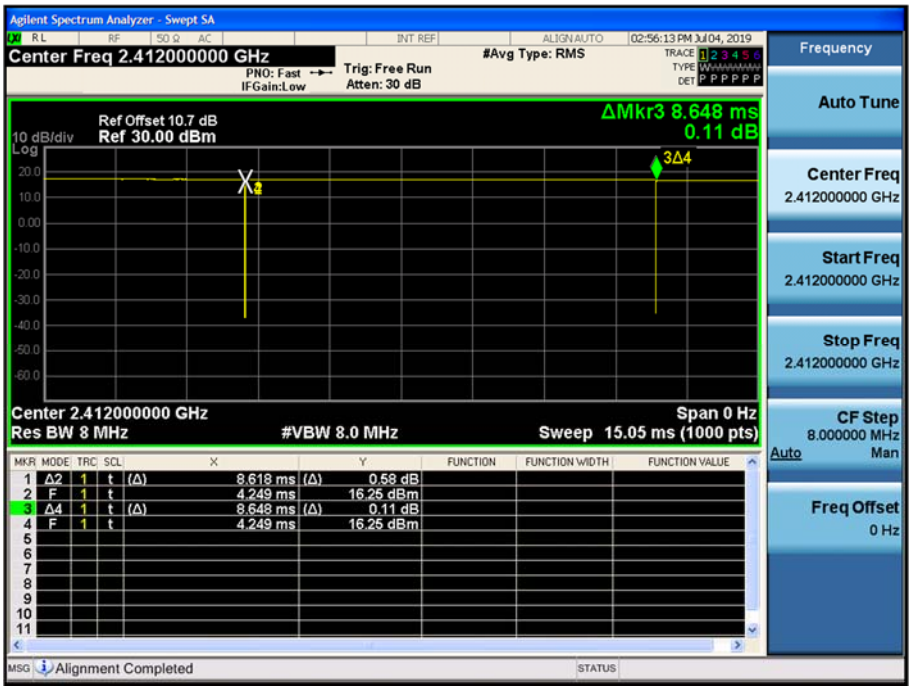

Duty cycle plot (802.11g(6Mbps))

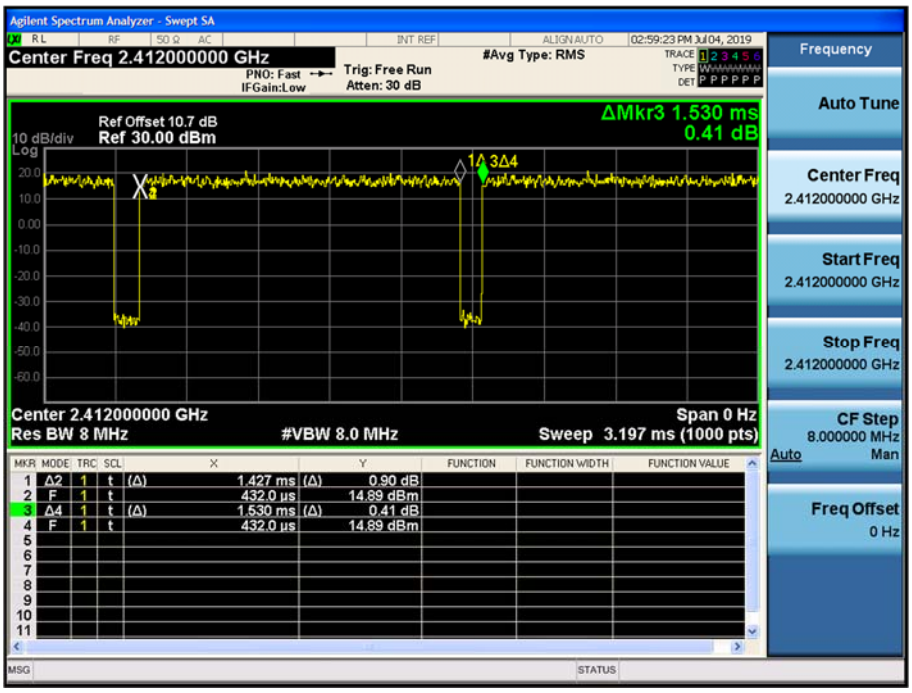

Duty cycle plot (802.11n(MCS0))

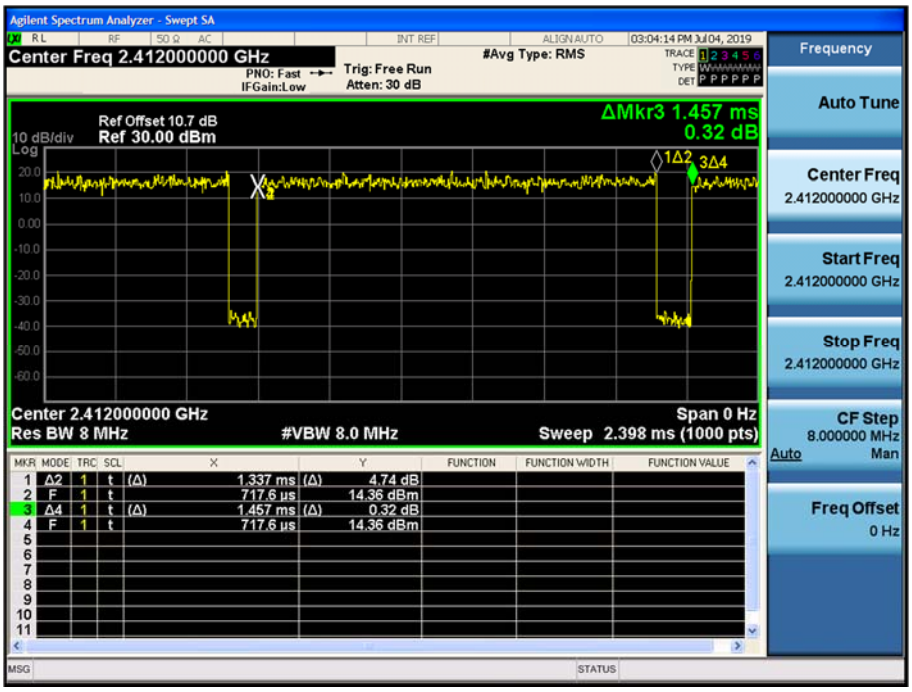

Note:

In order to simplify the report, attached plots were only the most lowest datarate.

9.2 6dB BANDWIDTH

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	11.099	0.5
2437	6	11.069	0.5
2462	11	12.060	0.5
2467	12	11.090	0.5
2472	13	11.120	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.16	0.5
2437	6	15.15	0.5
2462	11	15.49	0.5
2467	12	15.53	0.5
2472	13	15.49	0.5

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.15	0.5
2437	6	15.48	0.5
2462	11	15.38	0.5
2467	12	15.49	0.5
2472	13	15.53	0.5

▣ Test Plots

6dB Bandwidth plot (802.11b-CH 6)

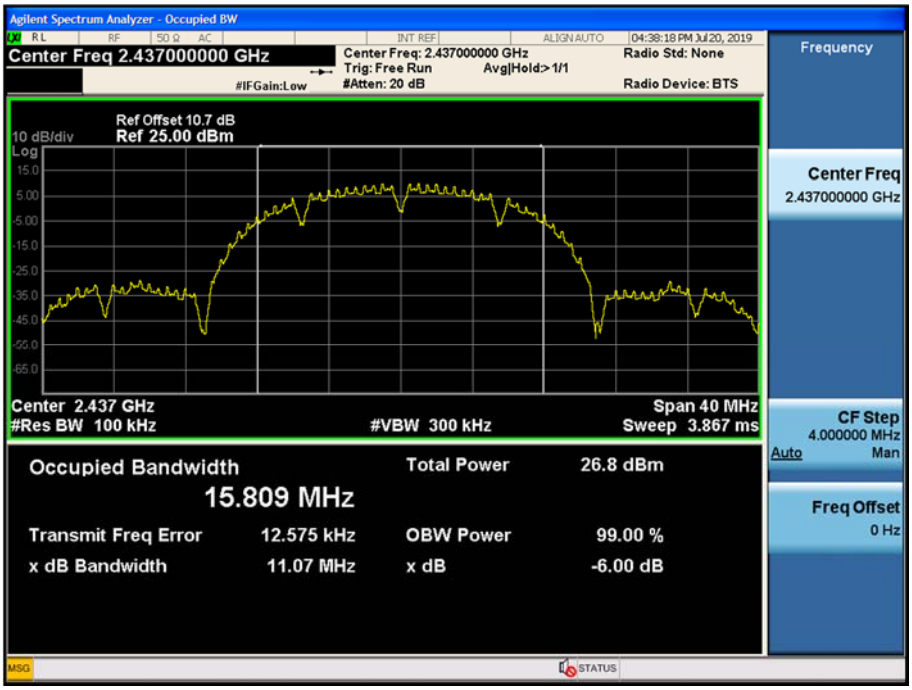

6dB Bandwidth plot (802.11g-CH 6)

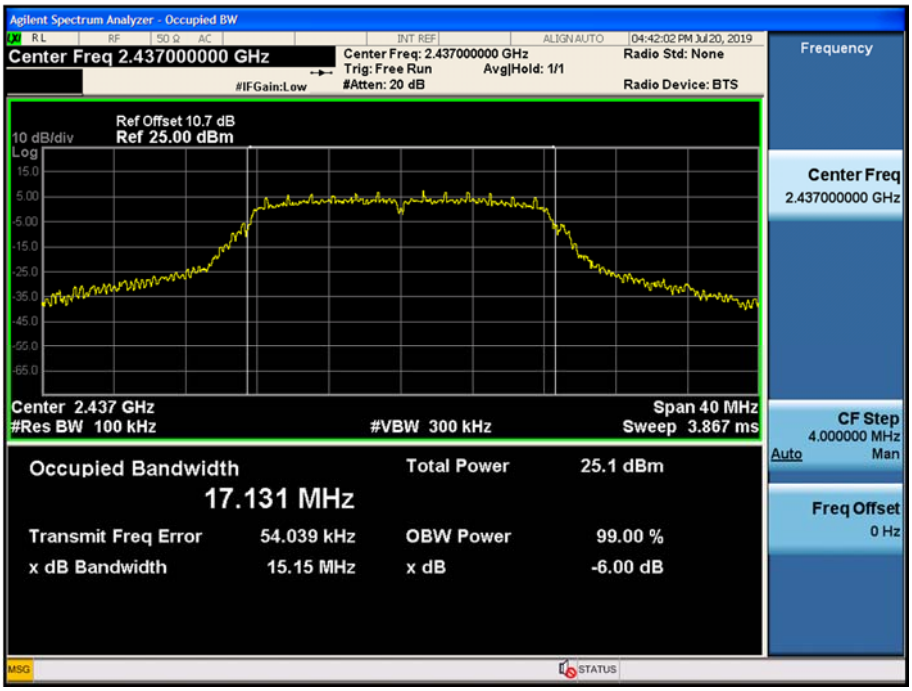

6dB Bandwidth plot (802.11n_HT20-CH 1)

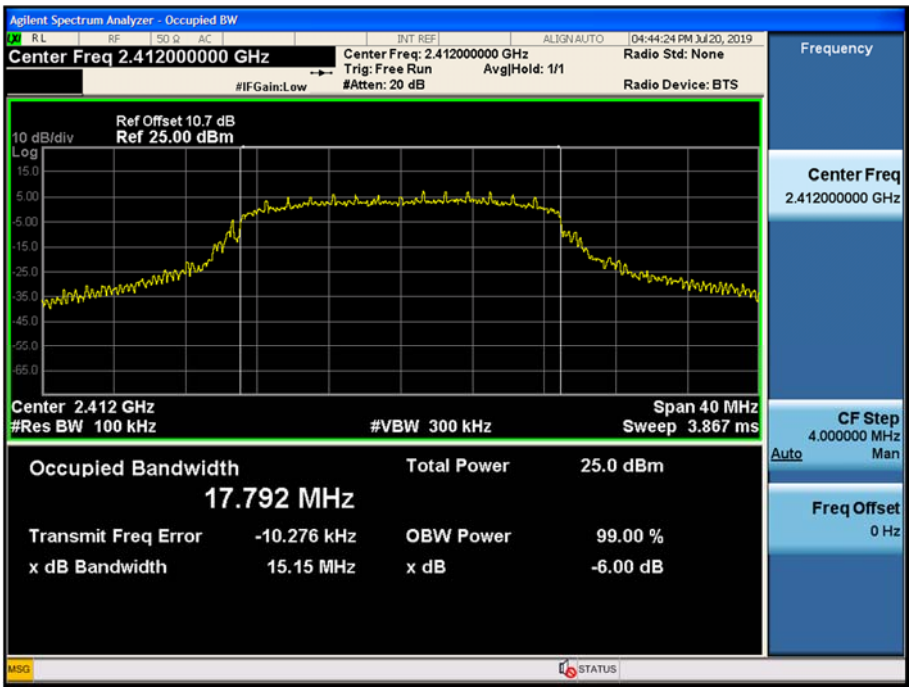

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.7 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	21.11	30	19.5
		2	21.42	30	
		5.5	21.52	30	
		11	21.80	30	
2437	6	1	21.85	30	19.5
		2	21.88	30	
		5.5	21.60	30	
		11	21.89	30	
2462	11	1	21.79	30	19.5
		2	21.73	30	
		5.5	21.71	30	
		11	21.91	30	
2467	12	1	20.21	30	16.5
		2	20.28	30	
		5.5	20.21	30	
		11	20.38	30	
2472	13	1	19.21	30	15.5
		2	19.43	30	
		5.5	19.37	30	
		11	19.58	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	24.70	30	18
		9	25.57	30	
		12	24.96	30	
		18	25.11	30	
		24	25.36	30	
		36	25.55	30	
		48	24.61	30	
		54	24.63	30	
2437	6	6	25.47	30	18
		9	25.78	30	
		12	25.52	30	
		18	25.58	30	
		24	25.44	30	
		36	25.43	30	
		48	25.12	30	
		54	25.10	30	
2462	11	6	25.20	30	18
		9	25.59	30	
		12	25.06	30	
		18	25.20	30	
		24	25.58	30	
		36	25.37	30	
		48	25.00	30	
		54	24.86	30	
2467	12	6	24.95	30	15.5
		9	25.53	30	
		12	24.89	30	
		18	24.78	30	
		24	24.91	30	
		36	24.97	30	
		48	24.80	30	
		54	24.92	30	
2472	13	6	20.59	30	8
		9	22.17	30	
		12	20.82	30	
		18	20.88	30	
		24	21.13	30	
		36	20.95	30	
		48	20.30	30	
		54	20.84	30	

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	25.31	30	18
		1	25.46	30	
		2	25.22	30	
		3	25.44	30	
		4	25.34	30	
		5	24.58	30	
		6	24.77	30	
		7	25.14	30	
2437	6	0	25.36	30	18
		1	26.16	30	
		2	25.72	30	
		3	25.79	30	
		4	25.81	30	
		5	25.16	30	
		6	25.53	30	
		7	25.73	30	
2462	11	0	25.60	30	18
		1	26.48	30	
		2	25.25	30	
		3	25.49	30	
		4	25.41	30	
		5	25.70	30	
		6	25.52	30	
		7	25.73	30	
2467	12	0	25.00	30	15.5
		1	25.29	30	
		2	25.25	30	
		3	24.76	30	
		4	24.74	30	
		5	24.81	30	
		6	25.18	30	
		7	25.16	30	
2472	13	0	21.04	30	8
		1	21.82	30	
		2	20.81	30	
		3	20.96	30	
		4	20.70	30	
		5	20.76	30	
		6	21.25	30	
		7	21.56	30	

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
   So, 10.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	19.14	0.015	19.16	30	19.5
		2	19.04	0.030	19.07	30	
		5.5	18.95	0.072	19.02	30	
		11	18.89	0.527	19.42	30	
2437	6	1	19.60	0.015	19.62	30	19.5
		2	19.41	0.030	19.44	30	
		5.5	19.20	0.072	19.27	30	
		11	19.15	0.527	19.68	30	
2462	11	1	19.30	0.015	19.32	30	19.5
		2	19.31	0.030	19.34	30	
		5.5	19.13	0.072	19.20	30	
		11	18.98	0.527	19.51	30	
2467	12	1	17.11	0.015	17.13	30	16.5
		2	16.94	0.030	16.97	30	
		5.5	16.84	0.072	16.91	30	
		11	16.64	0.527	17.17	30	
2472	13	1	16.27	0.015	16.29	30	15.5
		2	16.18	0.030	16.21	30	
		5.5	15.98	0.072	16.05	30	
		11	15.91	0.527	16.44	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	17.74	0.301	18.04	30	18
		9	17.51	0.423	17.93	30	
		12	17.48	0.631	18.11	30	
		18	17.27	0.940	18.21	30	
		24	17.02	1.211	18.23	30	
		36	16.62	1.667	18.29	30	
		48	15.51	2.051	17.56	30	
		54	15.29	2.206	17.50	30	
2437	6	6	18.01	0.301	18.31	30	18
		9	17.99	0.423	18.41	30	
		12	17.77	0.631	18.40	30	
		18	17.62	0.940	18.56	30	
		24	17.50	1.211	18.71	30	
		36	17.07	1.667	18.74	30	
		48	15.84	2.051	17.89	30	
		54	15.59	2.206	17.80	30	
2462	11	6	18.15	0.301	18.45	30	18
		9	17.85	0.423	18.27	30	
		12	17.70	0.631	18.33	30	
		18	17.65	0.940	18.59	30	
		24	17.40	1.211	18.61	30	
		36	16.96	1.667	18.63	30	
		48	15.90	2.051	17.95	30	
		54	15.72	2.206	17.93	30	
2467	12	6	15.82	0.301	16.12	30	15.5
		9	15.64	0.423	16.06	30	
		12	15.55	0.631	16.18	30	
		18	15.48	0.940	16.42	30	
		24	15.24	1.211	16.45	30	
		36	14.88	1.667	16.55	30	
		48	14.61	2.051	16.66	30	
		54	14.42	2.206	16.63	30	
2472	13	6	11.31	0.301	11.61	30	8
		9	11.21	0.423	11.63	30	
		12	10.88	0.631	11.51	30	
		18	10.77	0.940	11.71	30	
		24	10.38	1.211	11.59	30	
		36	10.11	1.667	11.78	30	
		48	9.76	2.051	11.81	30	
		54	9.51	2.206	11.72	30	

802.11n Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	17.71	0.373	18.08	30	18
		1	17.35	0.585	17.93	30	
		2	17.25	0.979	18.23	30	
		3	17.00	1.237	18.24	30	
		4	16.59	1.659	18.25	30	
		5	15.40	2.033	17.43	30	
		6	15.34	2.165	17.50	30	
		7	15.19	2.315	17.50	30	
2437	6	0	18.04	0.373	18.41	30	18
		1	17.58	0.585	18.16	30	
		2	17.51	0.979	18.49	30	
		3	17.32	1.237	18.56	30	
		4	16.92	1.659	18.58	30	
		5	15.68	2.033	17.71	30	
		6	15.62	2.165	17.78	30	
		7	15.39	2.315	17.70	30	
2462	11	0	17.91	0.373	18.28	30	18
		1	17.68	0.585	18.26	30	
		2	17.43	0.979	18.41	30	
		3	17.25	1.237	18.49	30	
		4	16.95	1.659	18.61	30	
		5	15.91	2.033	17.94	30	
		6	15.80	2.165	17.96	30	
		7	15.54	2.315	17.85	30	
2467	12	0	15.82	0.373	16.19	30	15.5
		1	15.59	0.585	16.17	30	
		2	15.20	0.979	16.18	30	
		3	15.11	1.237	16.35	30	
		4	14.71	1.659	16.37	30	
		5	14.55	2.033	16.58	30	
		6	14.41	2.165	16.57	30	
		7	14.28	2.315	16.59	30	
2472	13	0	11.11	0.373	11.48	30	8
		1	10.72	0.585	11.30	30	
		2	10.48	0.979	11.46	30	
		3	10.29	1.237	11.53	30	
		4	10.07	1.659	11.73	30	
		5	9.68	2.033	11.71	30	
		6	9.48	2.165	11.64	30	
		7	9.43	2.315	11.74	30	

9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	1.650	0.527	2.177	8
	2437	6	1.961	0.527	2.488	
	2462	11	2.076	0.527	2.603	
	2467	12	-0.973	0.527	-0.446	
	2472	13	-1.220	0.527	-0.693	
802.11g	2412	1	-2.160	1.667	-0.493	
	2437	6	-1.991	1.667	-0.324	
	2462	11	-1.960	1.667	-0.293	
	2467	12	-4.440	2.051	-2.389	
	2472	13	-8.638	2.051	-6.587	
802.11n	2412	1	-1.549	1.659	0.110	
	2437	6	-1.396	1.659	0.263	
	2462	11	-1.319	1.659	0.340	
	2467	12	-5.949	2.315	-3.634	
	2472	13	-8.745	2.315	-6.430	

Note :

1. Spectrum reading values are not plot data.
   The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. 10.7 dB is offset for 2.4 GHz Band.

▣ Test Plots

Power Spectral Density (802.11b-CH 11)

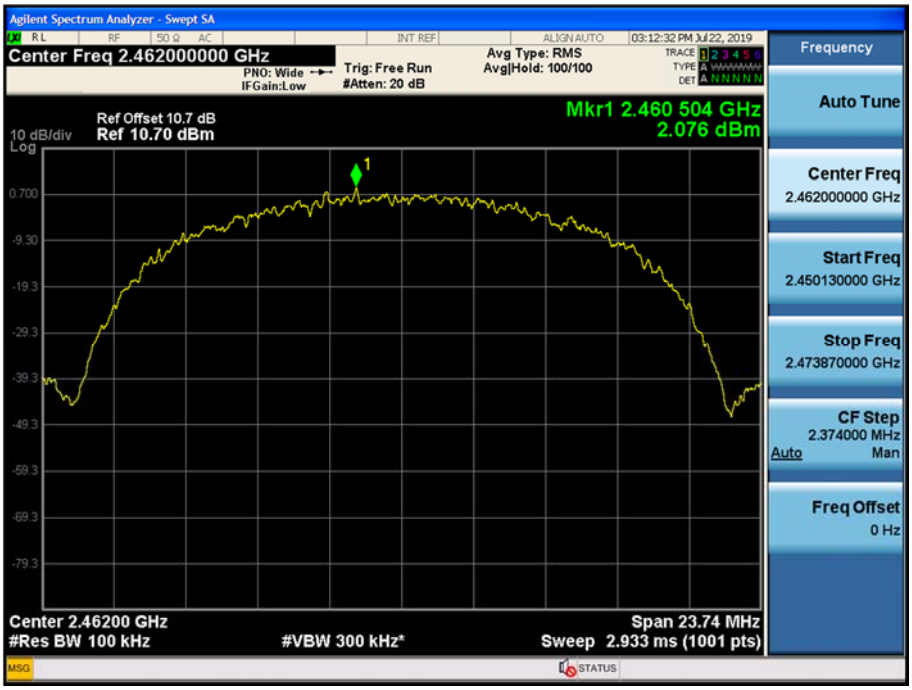

Power Spectral Density (802.11g-CH 11)

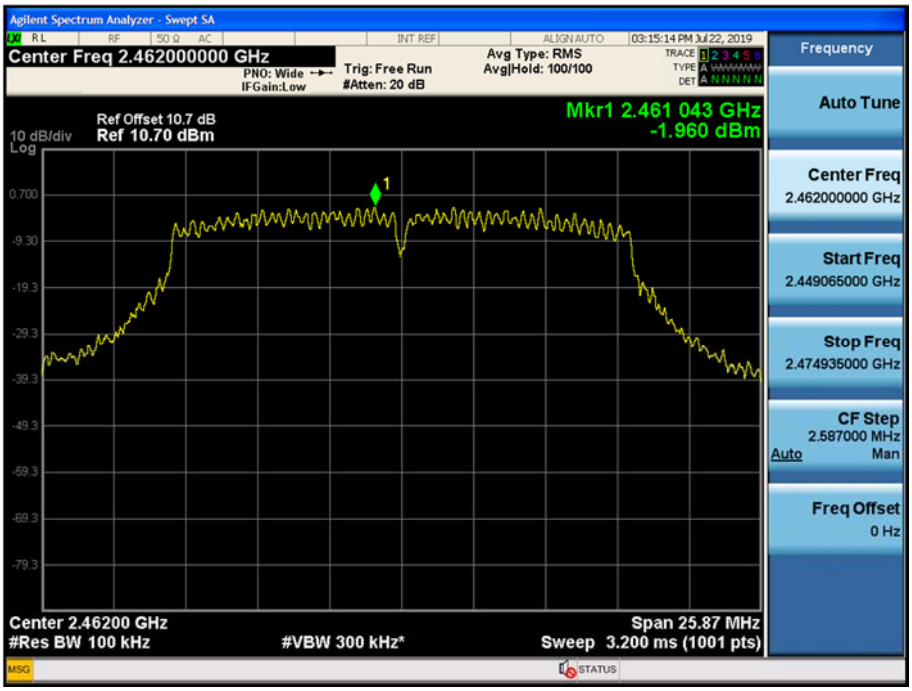

Power Spectral Density (802.11n_HT20 -CH 11)

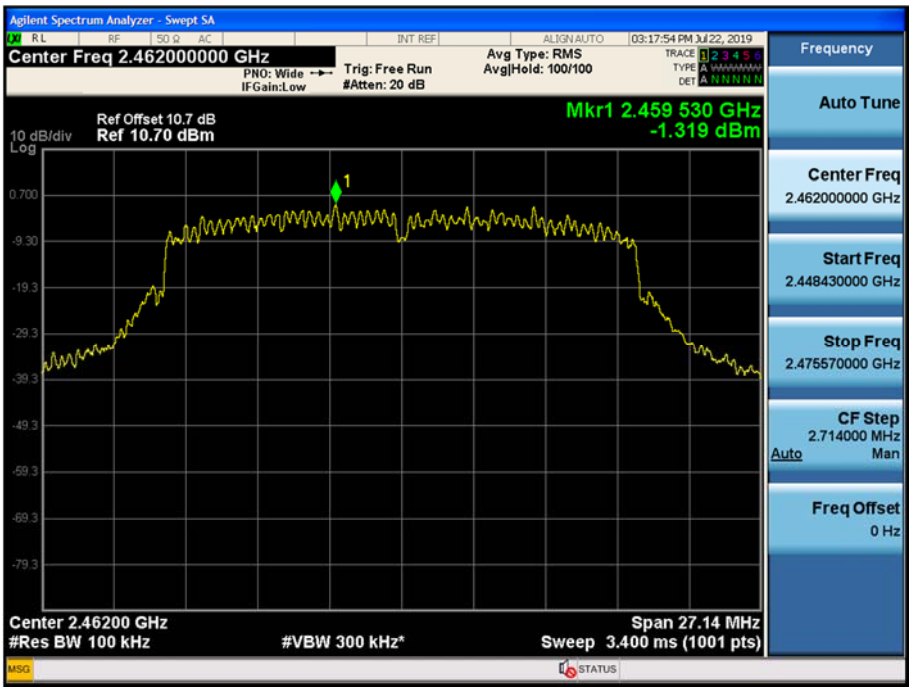

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.
In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

Band Edge (802.11b-CH11)

Band Edge (802.11b-CH12)

Band Edge (802.11b-CH13)

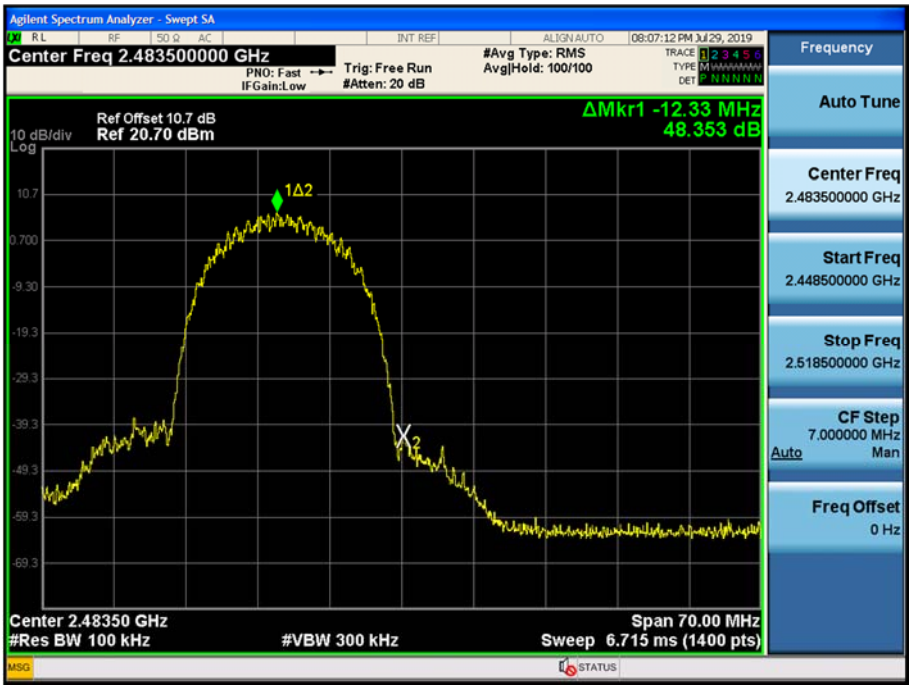

Band Edge (802.11g-CH1)

Band Edge (802.11g-CH11)

Band Edge (802.11g-CH12)

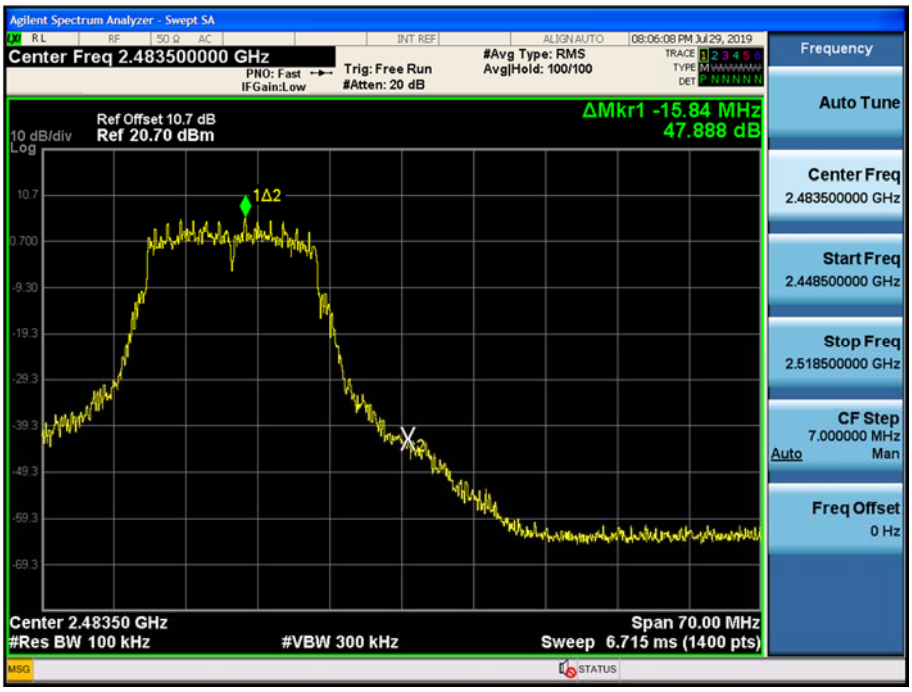

Band Edge (802.11g-CH13)

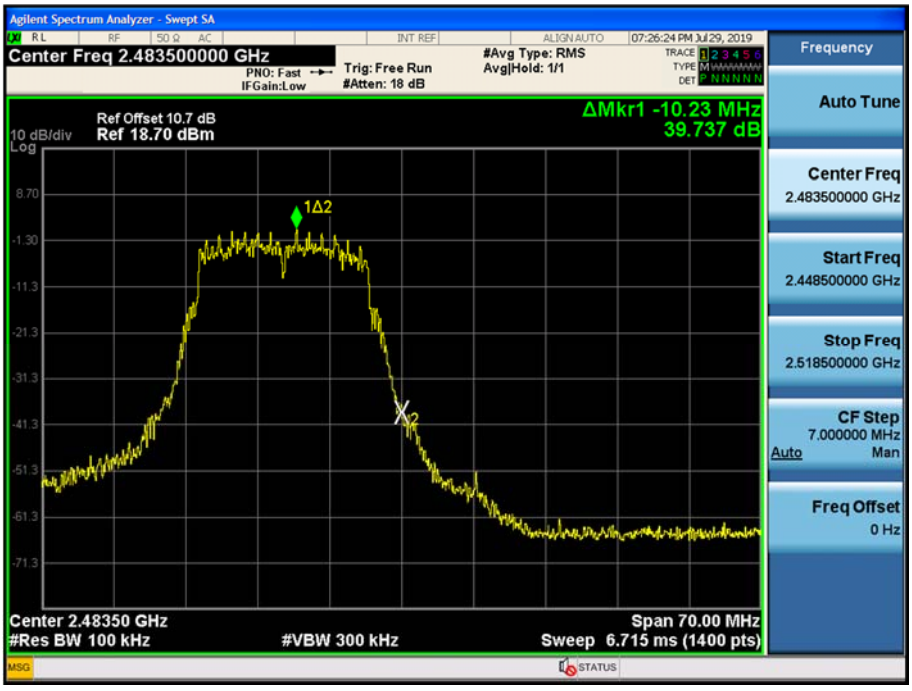

Band Edge (802.11n_HT20 -CH1)

Band Edge (802.11n_HT20 -CH11)

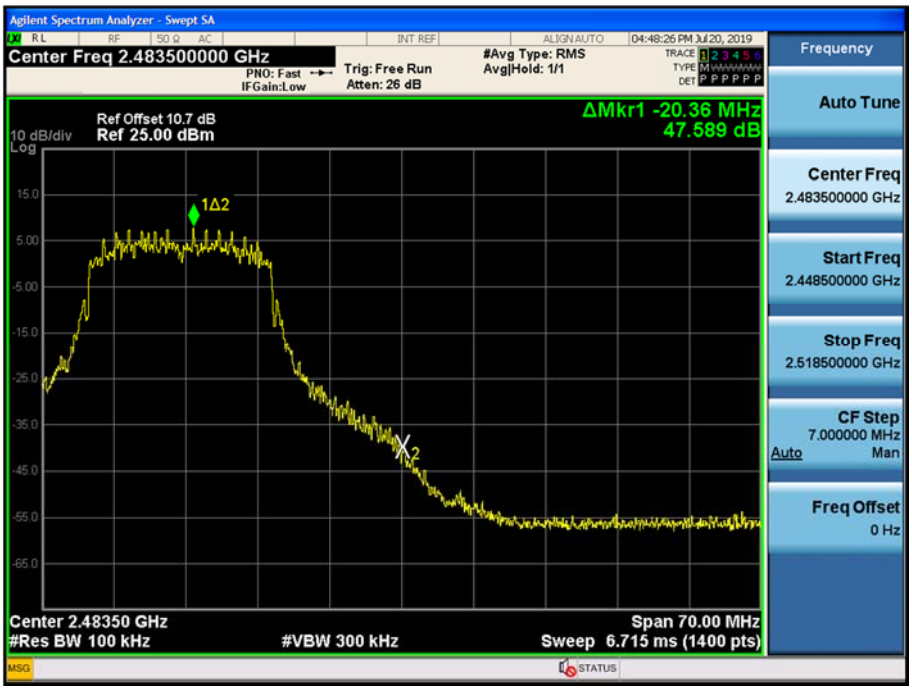

Band Edge (802.11n_HT20 -CH12)

Band Edge (802.11n_HT20 -CH13)

▣ Test Plots(Conducted Spurious Emission)

30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

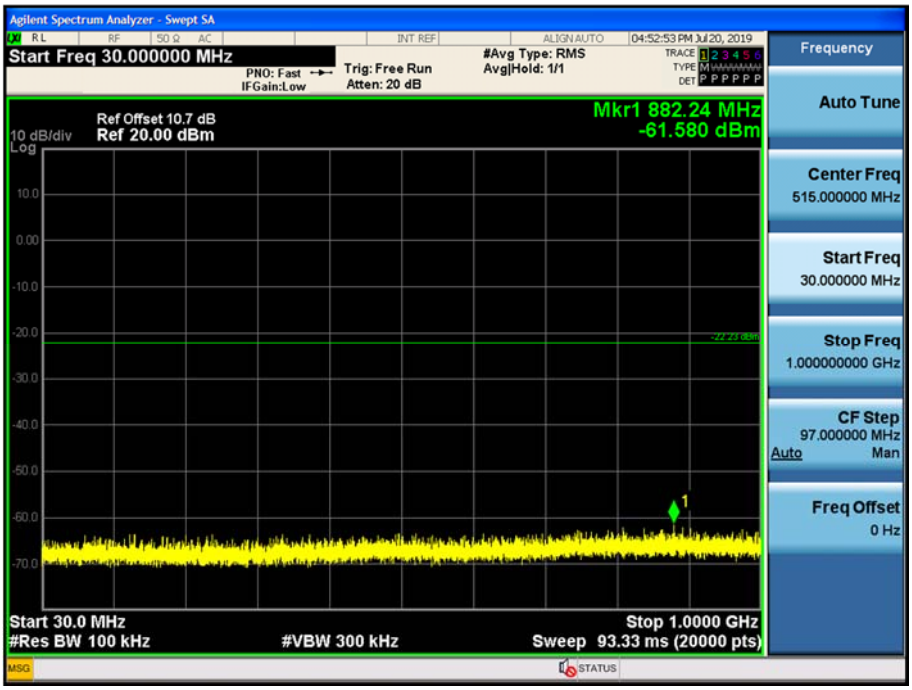

1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

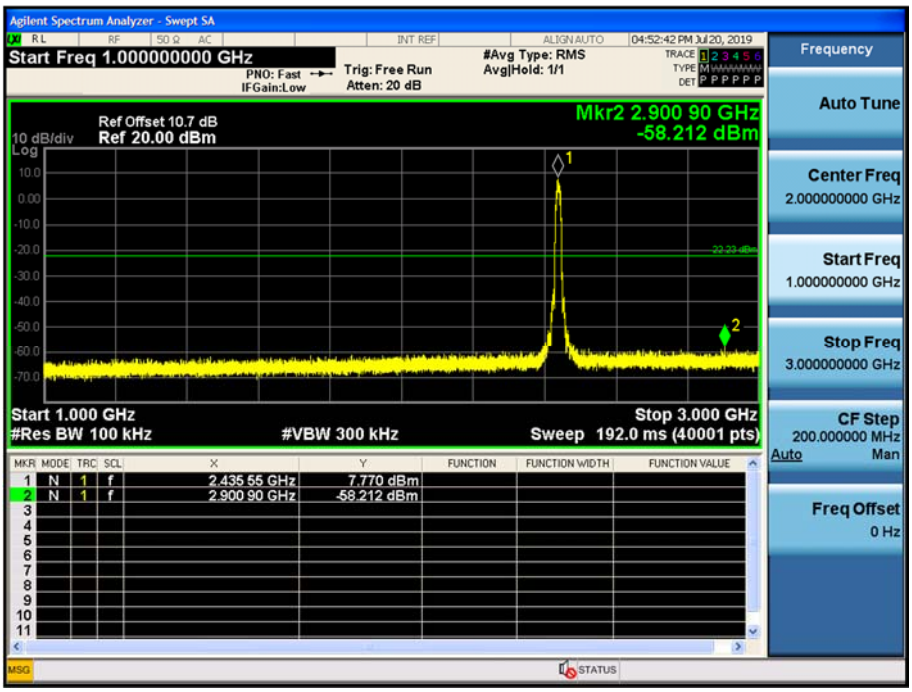

3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

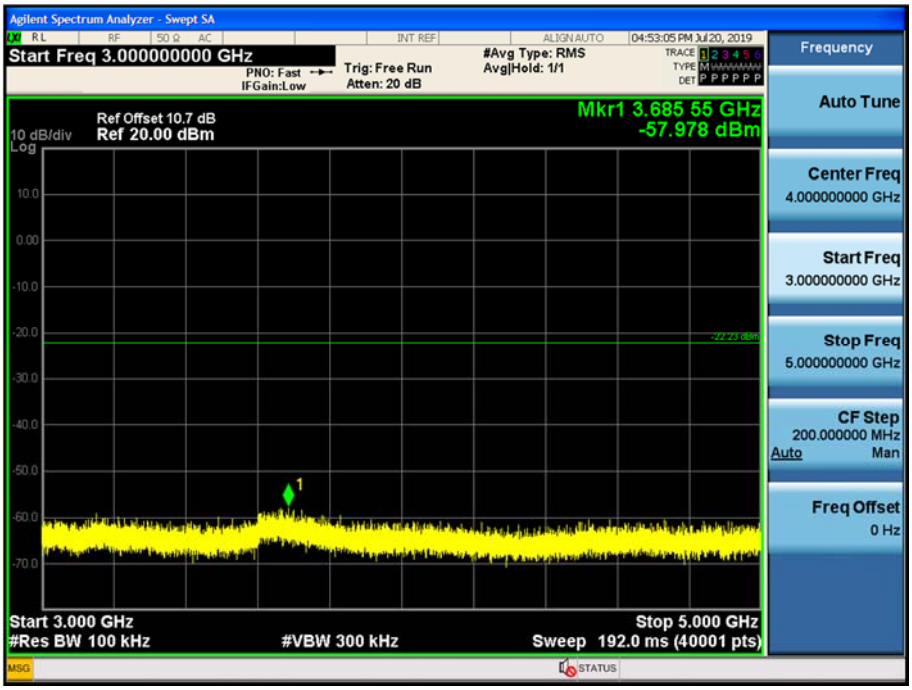

5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

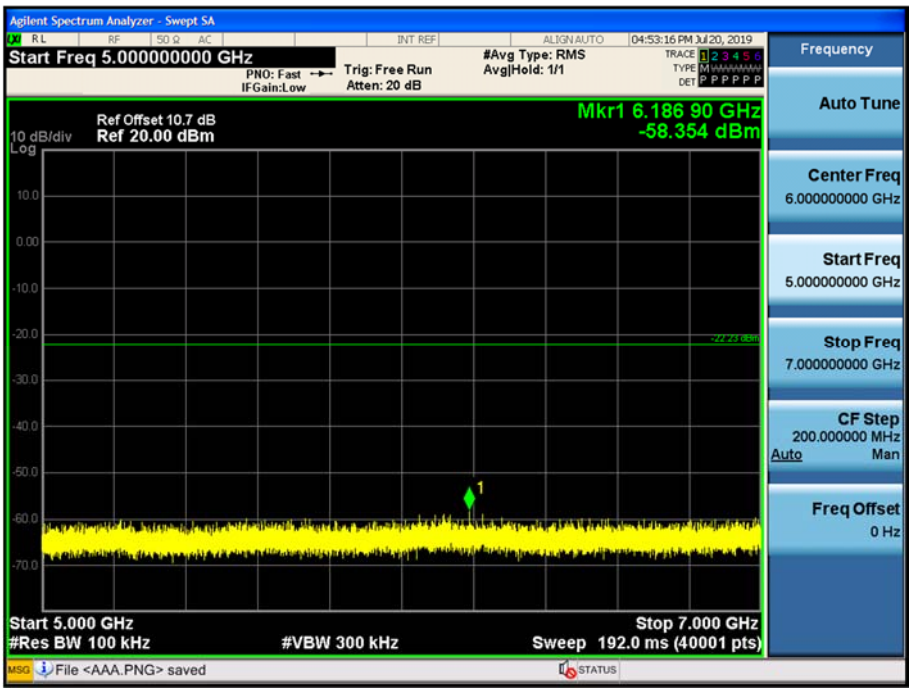

7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

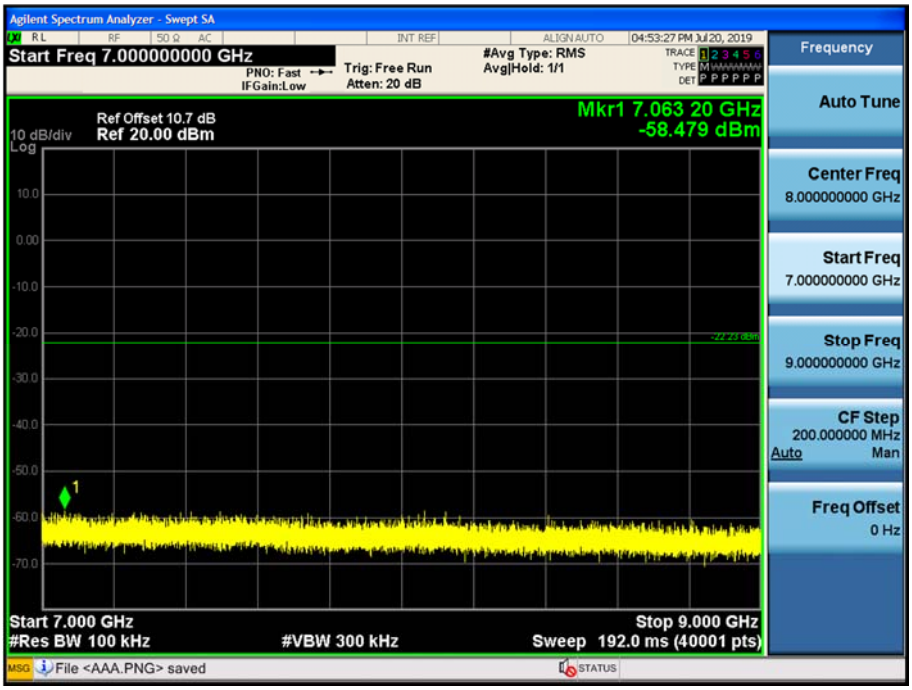

9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

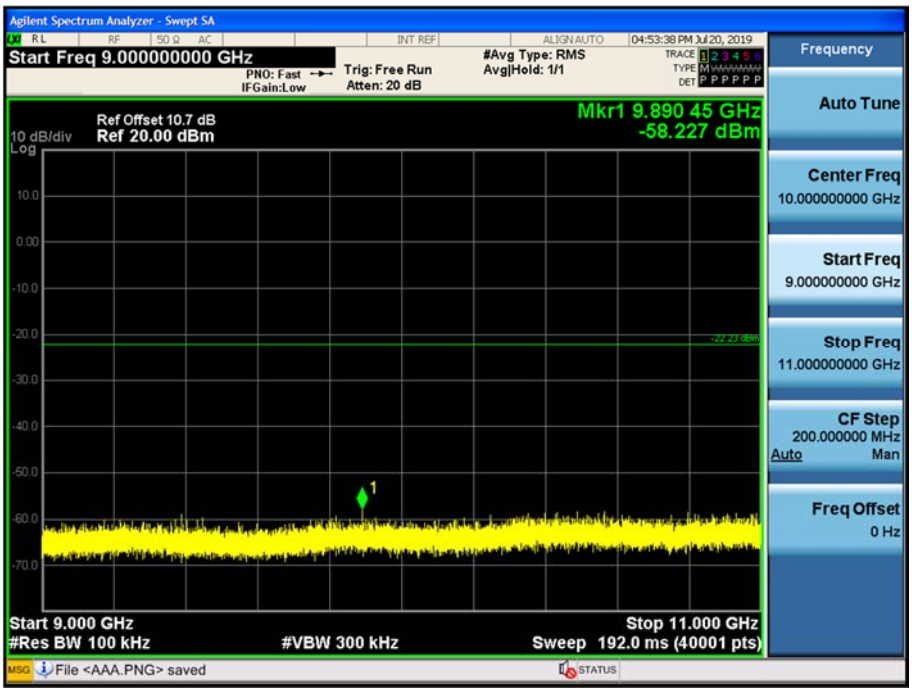

11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

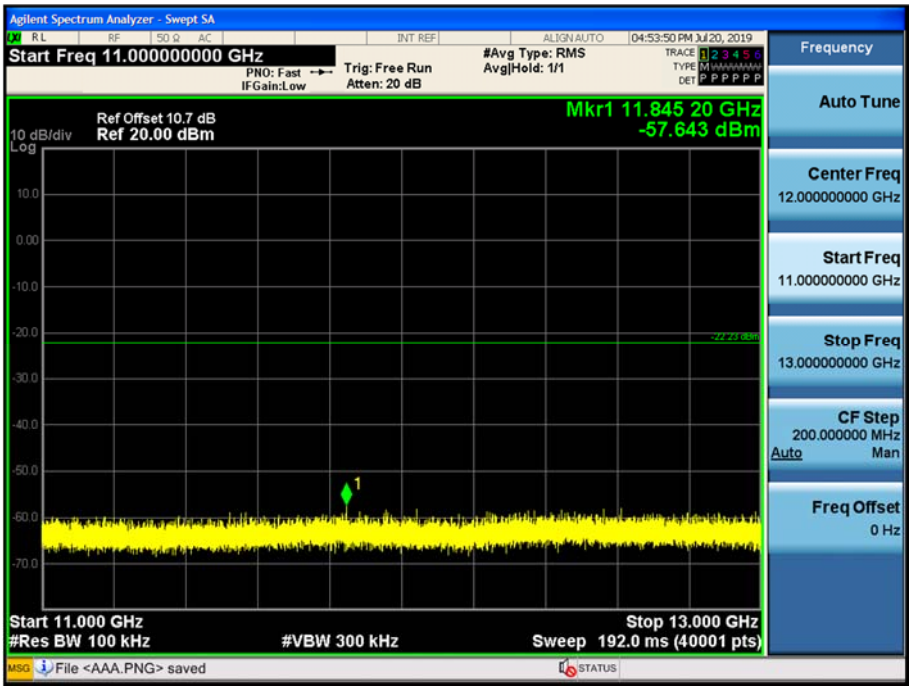

13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

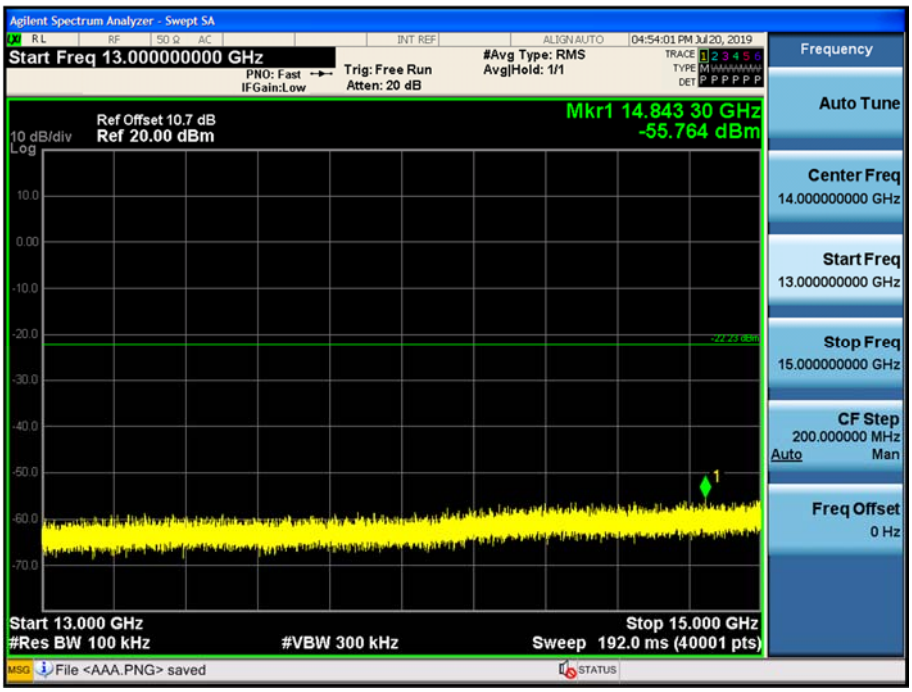

15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

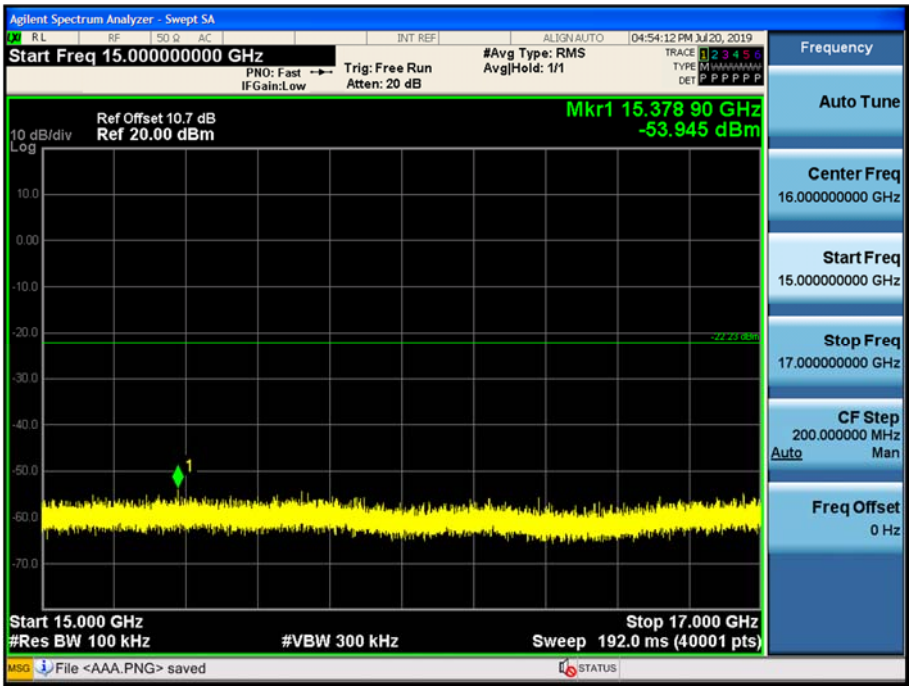

17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

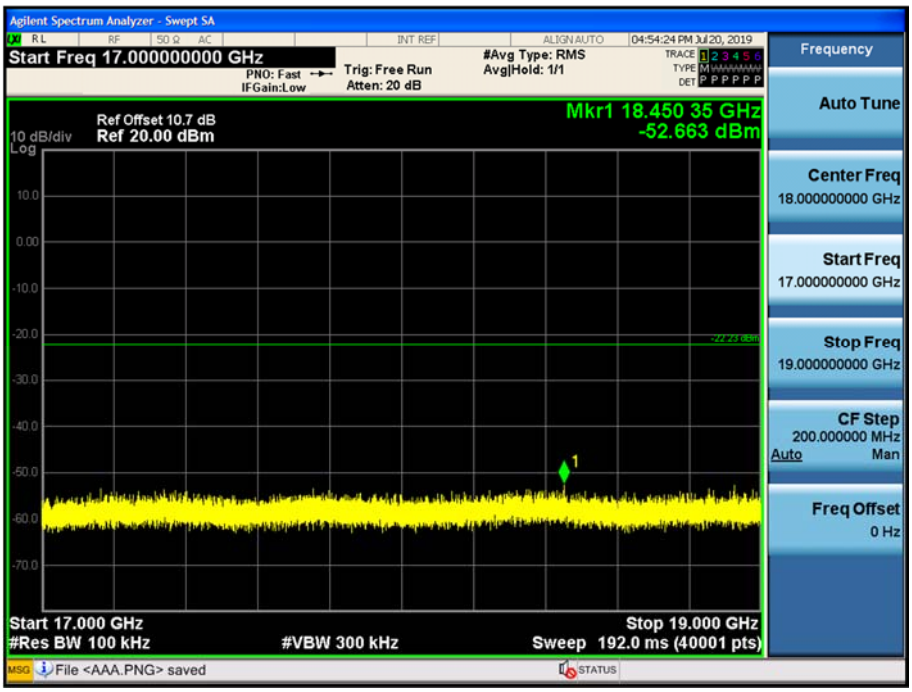

19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

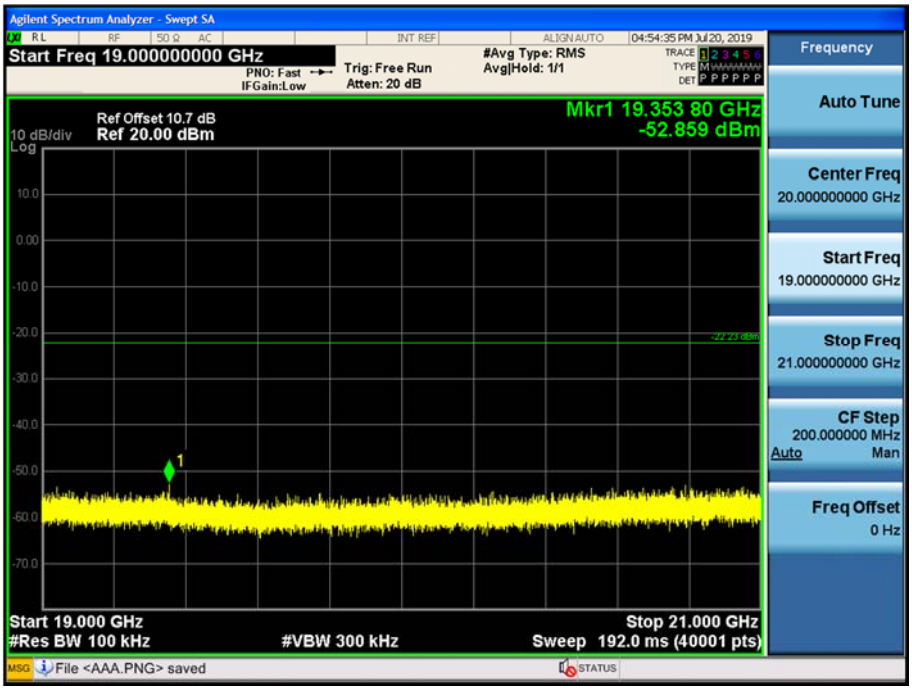

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

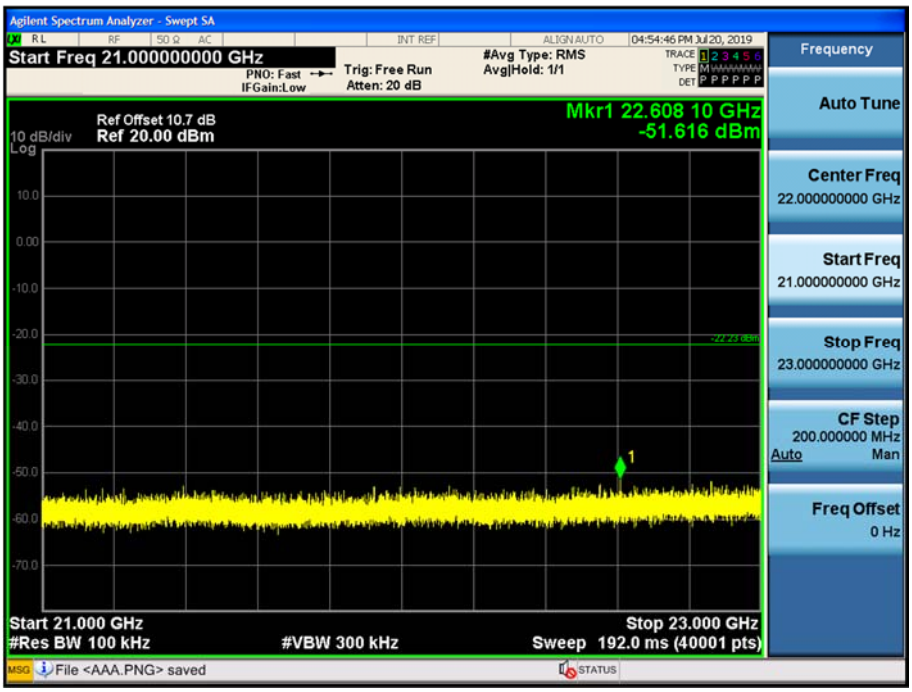

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

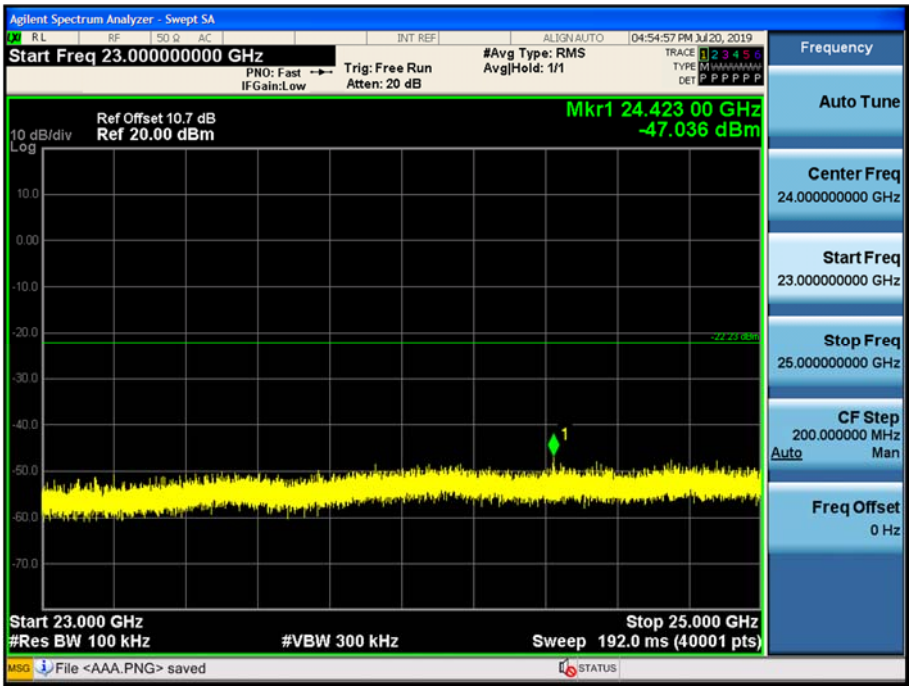

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = 40*log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	48.67	0.56	V	49.23	73.98	24.76	PK
4824	38.12	0.56	V	38.68	53.98	15.31	AV
7236	46.95	9.47	V	56.42	73.98	17.56	PK
7236	36.01	9.47	V	45.48	53.98	8.50	AV
4824	49.25	0.56	H	49.81	73.98	24.18	PK
4824	38.60	0.56	H	39.16	53.98	14.83	AV
7236	47.63	9.47	H	57.10	73.98	16.88	PK
7236	36.08	9.47	H	45.55	53.98	8.43	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.87	0.87	V	49.74	73.98	24.25	PK
4874	36.84	0.87	V	37.71	53.98	16.28	AV
7311	48.05	9.16	V	57.21	73.98	16.77	PK
7311	36.19	9.16	V	45.35	53.98	8.63	AV
4874	49.30	0.87	H	50.17	73.98	23.82	PK
4874	37.10	0.87	H	37.97	53.98	16.02	AV
7311	48.17	9.16	H	57.33	73.98	16.65	PK
7311	36.28	9.16	H	45.44	53.98	8.54	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.01	0.81	V	48.82	73.98	25.17	PK
4924	37.59	0.81	V	38.40	53.98	15.59	AV
7386	47.26	9.38	V	56.64	73.98	17.34	PK
7386	34.94	9.38	V	44.32	53.98	9.66	AV
4924	48.37	0.81	H	49.18	73.98	24.81	PK
4924	37.75	0.81	H	38.56	53.98	15.43	AV
7386	47.60	9.38	H	56.98	73.98	17.00	PK
7386	35.10	9.38	H	44.48	53.98	9.50	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	47.21	0.79	V	48.00	73.98	25.98	PK
4934	36.81	0.79	V	37.60	53.98	16.38	AV
7401	45.87	9.50	V	55.37	73.98	18.61	PK
7401	33.90	9.50	V	43.40	53.98	10.58	AV
4934	48.69	0.79	H	49.48	73.98	24.50	PK
4934	37.23	0.79	H	38.02	53.98	15.96	AV
7401	46.02	9.50	H	55.52	73.98	18.46	PK
7401	34.83	9.50	H	44.33	53.98	9.65	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	47.82	0.84	V	48.66	73.98	25.32	PK
4944	36.91	0.84	V	37.75	53.98	16.23	AV
7416	45.80	9.97	V	55.77	73.98	18.21	PK
7416	33.82	9.97	V	43.79	53.98	10.19	AV
4944	48.93	0.84	H	49.77	73.98	24.21	PK
4944	37.22	0.84	H	38.06	53.98	15.92	AV
7416	46.37	9.97	H	56.34	73.98	17.64	PK
7416	34.62	9.97	H	44.59	53.98	9.39	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	48.42	0.00	0.56	V	48.98	73.98	25.01	PK
4824	37.48	0.30	0.56	V	38.34	53.98	15.64	AV
7236	46.92	0.00	9.47	V	56.39	73.98	17.59	PK
7236	35.89	0.30	9.47	V	45.66	53.98	8.32	AV
4824	48.94	0.00	0.56	H	49.50	73.98	24.49	PK
4824	37.56	0.30	0.56	H	38.42	53.98	15.56	AV
7236	47.64	0.00	9.47	H	57.11	73.98	16.87	PK
7236	36.00	0.30	9.47	H	45.77	53.98	8.21	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.55	0.00	0.87	V	49.42	73.98	24.57	PK
4874	36.57	0.30	0.87	V	37.74	53.98	16.24	AV
7311	48.12	0.00	9.16	V	57.28	73.98	16.70	PK
7311	35.86	0.30	9.16	V	45.32	53.98	8.66	AV
4874	48.81	0.00	0.87	H	49.68	73.98	24.31	PK
4874	36.70	0.30	0.87	H	37.87	53.98	16.11	AV
7311	48.38	0.00	9.16	H	57.54	73.98	16.44	PK
7311	35.99	0.30	9.16	H	45.45	53.98	8.53	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	47.95	0.00	0.81	V	48.76	73.98	25.23	PK
4924	35.88	0.30	0.81	V	36.99	53.98	16.99	AV
7386	47.33	0.00	9.38	V	56.71	73.98	17.27	PK
7386	34.89	0.30	9.38	V	44.57	53.98	9.41	AV
4924	48.61	0.00	0.81	H	49.42	73.98	24.57	PK
4924	35.90	0.30	0.81	H	37.01	53.98	16.97	AV
7386	47.57	0.00	9.38	H	56.95	73.98	17.03	PK
7386	34.99	0.30	9.38	H	44.67	53.98	9.31	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2467
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	47.11	0.00	0.79	V	47.90	73.98	26.08	PK
4934	35.91	0.30	0.79	V	37.00	53.98	16.98	AV
7401	46.17	0.00	9.50	V	55.67	73.98	18.31	PK
7401	33.86	0.30	9.50	V	43.66	53.98	10.32	AV
4934	48.59	0.00	0.79	H	49.38	73.98	24.60	PK
4934	36.55	0.30	0.79	H	37.64	53.98	16.34	AV
7401	46.98	0.00	9.50	H	56.48	73.98	17.50	PK
7401	34.78	0.30	9.50	H	44.58	53.98	9.40	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	47.87	0.00	0.84	V	48.71	73.98	25.27	PK
4944	35.80	0.30	0.84	V	36.94	53.98	17.04	AV
7416	45.81	0.00	9.97	V	55.78	73.98	18.20	PK
7416	34.02	0.30	9.97	V	44.29	53.98	9.69	AV
4944	48.17	0.00	0.84	H	49.01	73.98	24.97	PK
4944	36.44	0.30	0.84	H	37.58	53.98	16.40	AV
7416	46.89	0.00	9.97	H	56.86	73.98	17.12	PK
7416	34.62	0.30	9.97	H	44.89	53.98	9.09	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.12	0.00	0.56	V	49.68	73.98	24.31	PK
4824	37.55	0.37	0.56	V	38.48	53.98	15.50	AV
7236	47.35	0.00	9.47	V	56.82	73.98	17.16	PK
7236	35.91	0.37	9.47	V	45.75	53.98	8.23	AV
4824	48.81	0.00	0.56	H	49.37	73.98	24.62	PK
4824	37.61	0.37	0.56	H	38.54	53.98	15.44	AV
7236	48.30	0.00	9.47	H	57.77	73.98	16.21	PK
7236	36.09	0.37	9.47	H	45.93	53.98	8.05	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.71	0.00	0.87	V	49.58	73.98	24.41	PK
4874	36.66	0.37	0.87	V	37.90	53.98	16.08	AV
7311	48.48	0.00	9.16	V	57.64	73.98	16.34	PK
7311	35.91	0.37	9.16	V	45.44	53.98	8.54	AV
4874	48.99	0.00	0.87	H	49.86	73.98	24.13	PK
4874	36.71	0.37	0.87	H	37.95	53.98	16.03	AV
7311	48.51	0.00	9.16	H	57.67	73.98	16.31	PK
7311	35.95	0.37	9.16	H	45.48	53.98	8.50	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.12	0.00	0.81	V	48.93	73.98	25.06	PK
4924	36.09	0.37	0.81	V	37.27	53.98	16.71	AV
7386	47.61	0.00	9.38	V	56.99	73.98	16.99	PK
7386	34.91	0.37	9.38	V	44.66	53.98	9.32	AV
4924	49.02	0.00	0.81	H	49.83	73.98	24.16	PK
4924	36.01	0.37	0.81	H	37.19	53.98	16.79	AV
7386	47.99	0.00	9.38	H	57.37	73.98	16.61	PK
7386	35.03	0.37	9.38	H	44.78	53.98	9.20	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2467
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	47.86	0.00	0.79	V	48.65	73.98	25.33	PK
4934	35.71	0.37	0.79	V	36.87	53.98	17.11	AV
7401	45.91	0.00	9.50	V	55.41	73.98	18.57	PK
7401	33.70	0.37	9.50	V	43.57	53.98	10.41	AV
4934	48.72	0.00	0.79	H	49.51	73.98	24.47	PK
4934	36.47	0.37	0.79	H	37.63	53.98	16.35	AV
7401	46.60	0.00	9.50	H	56.10	73.98	17.88	PK
7401	34.81	0.37	9.50	H	44.68	53.98	9.30	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	47.45	0.00	0.84	V	48.29	73.98	25.69	PK
4944	35.62	0.37	0.84	V	36.83	53.98	17.15	AV
7416	46.92	0.00	9.97	V	56.89	73.98	17.09	PK
7416	33.90	0.37	9.97	V	44.24	53.98	9.74	AV
4944	48.62	0.00	0.84	H	49.46	73.98	24.52	PK
4944	36.42	0.37	0.84	H	37.63	53.98	16.35	AV
7416	47.41	0.00	9.97	H	57.38	73.98	16.60	PK
7416	34.64	0.37	9.97	H	44.98	53.98	9.00	AV

▣ Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (802.11n(HT20), Ch.1 3rd Harmonic)

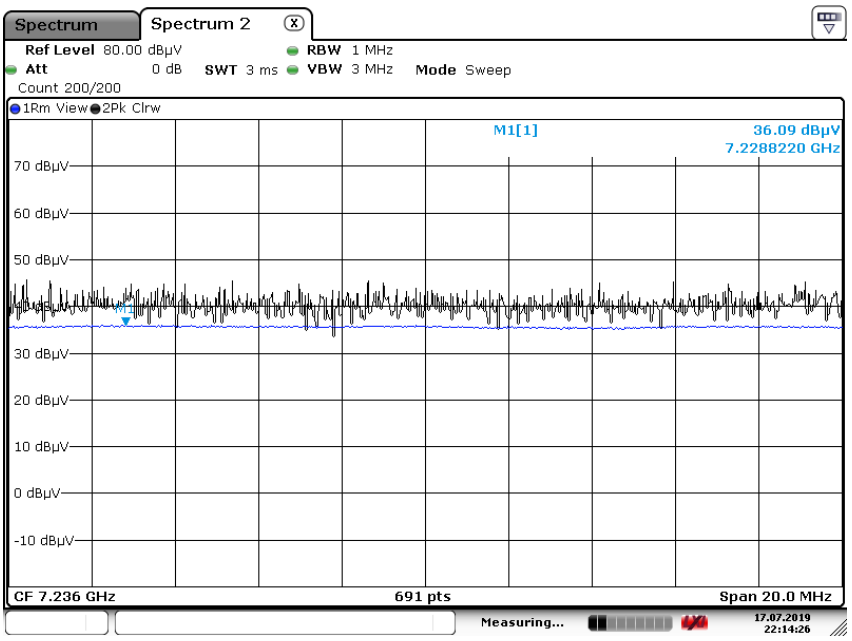

Date: 17.JUL.2019 22:14:26

Radiated Spurious Emissions plot – Peak Reading (802.11n(HT20), Ch.1 3rd Harmonic)

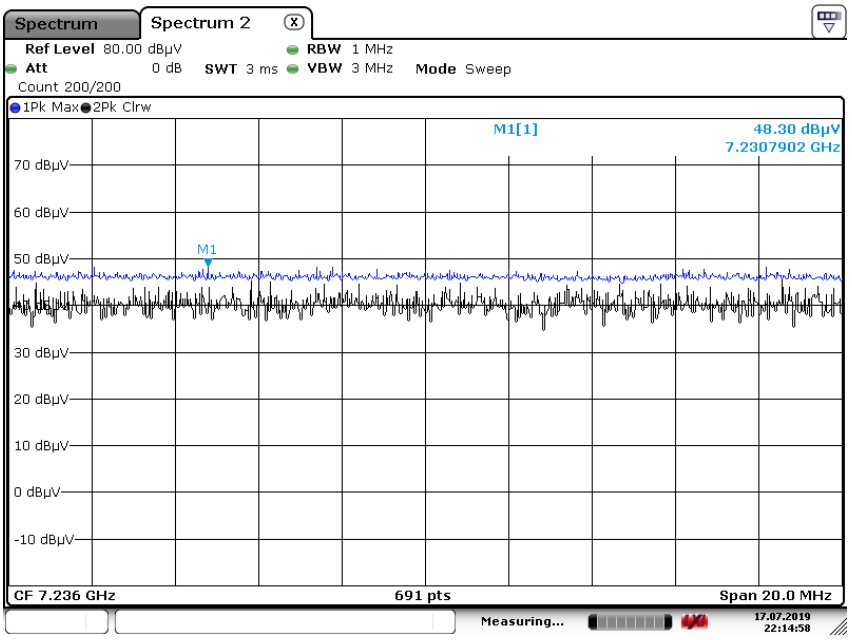

Date: 17.JUL.2019 22:14:58

Radiated Spurious Emissions plot – Average Reading (802.11n(HT20), Ch.13 3rd Harmonic)

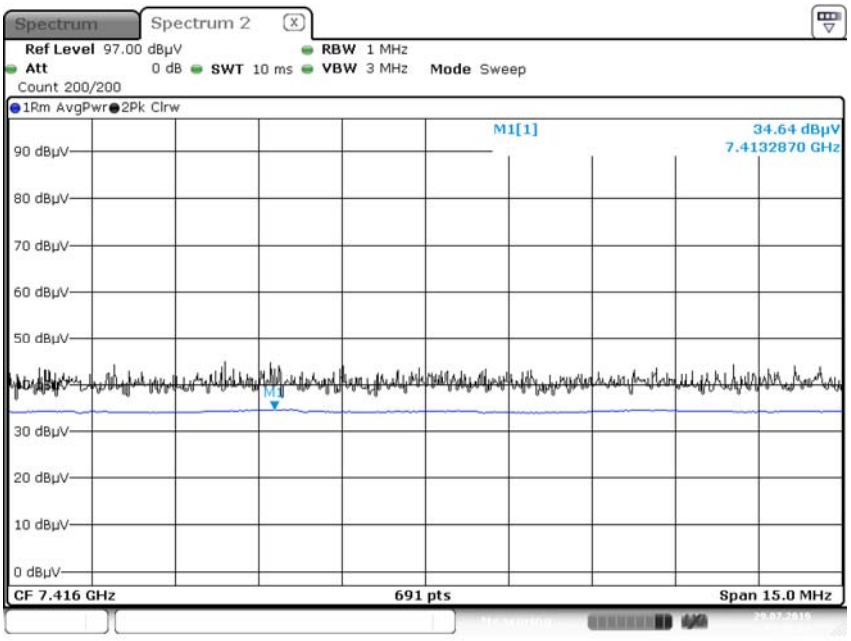

Radiated Spurious Emissions plot – Peak Reading (802.11n(HT20), Ch.13 3rd Harmonic)

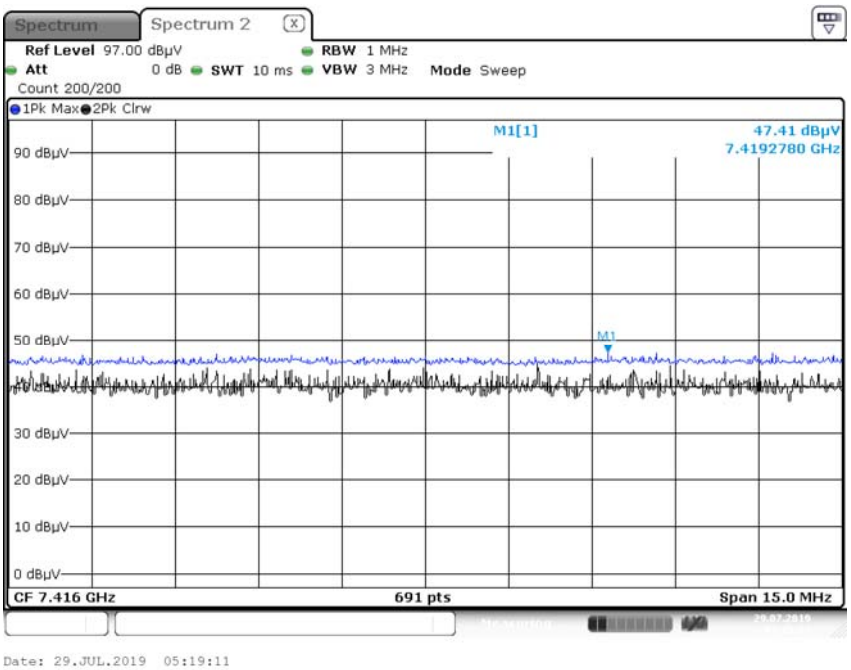

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.75	1.16	H	52.91	73.98	21.07	PK
2390.0	40.70	1.16	H	41.86	53.98	12.12	AV
2390.0	51.97	1.16	V	53.13	73.98	20.85	PK
2390.0	40.88	1.16	V	42.04	53.98	11.94	AV
2483.5	53.00	1.12	H	54.12	73.98	19.87	PK
2483.5	40.96	1.12	H	42.08	53.98	11.91	AV
2483.5	52.84	1.12	V	53.96	73.98	20.03	PK
2483.5	41.10	1.12	V	42.22	53.98	11.77	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	54.98	1.12	H	56.10	73.98	17.89	PK
2483.5	47.31	1.12	H	48.43	53.98	5.55	AV
2483.5	55.88	1.12	V	57.00	73.98	16.99	PK
2483.5	47.64	1.12	V	48.76	53.98	5.22	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	56.54	1.12	H	57.66	73.98	16.33	PK
2483.5	47.91	1.12	H	49.03	53.98	4.96	AV
2483.5	56.98	1.12	V	58.10	73.98	15.89	PK
2483.5	48.77	1.12	V	49.89	53.98	4.09	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	63.02	0.00	1.16	H	64.18	73.98	9.80	PK
2390.0	47.59	0.30	1.16	H	49.05	53.98	4.93	AV
2390.0	64.00	0.00	1.16	V	65.16	73.98	8.82	PK
2390.0	48.95	0.30	1.16	V	50.41	53.98	3.57	AV
2483.5	66.93	0.00	1.12	H	68.05	73.98	5.94	PK
2483.5	47.85	0.30	1.12	H	49.27	53.98	4.71	AV
2483.5	67.91	0.00	1.12	V	69.03	73.98	4.96	PK
2483.5	48.30	0.30	1.12	V	49.72	53.98	4.26	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	61.61	0.00	1.12	H	62.73	73.98	11.26	PK
2483.5	48.17	0.30	1.12	H	49.59	53.98	4.39	AV
2483.5	62.32	0.00	1.12	V	63.44	73.98	10.55	PK
2483.5	49.08	0.30	1.12	V	50.50	53.98	3.48	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5*(2484)	61.31	0.00	1.12	V	62.43	73.98	11.56	PK
2483.5*(2484)	49.10	0.30	1.12	V	50.52	53.98	3.46	AV
2483.5*(2485)	56.66	0.00	1.12	V	57.78	73.98	16.21	PK
2483.5*(2485)	45.00	0.30	1.12	V	46.42	53.98	7.56	AV
2485.5~2500	60.34	0.00	1.12	V	61.46	73.98	12.53	PK
2485.5~2500	44.44	0.30	1.12	V	45.86	53.98	8.12	AV
2483.5*(2484)	60.95	0.00	1.12	H	62.07	73.98	11.92	PK
2483.5*(2484)	48.85	0.30	1.12	H	50.27	53.98	3.71	AV
2483.5*(2485)	56.12	0.00	1.12	H	57.24	73.98	16.75	PK
2483.5*(2485)	44.75	0.30	1.12	H	46.17	53.98	7.81	AV
2485.5~2500	59.73	0.00	1.12	H	60.85	73.98	13.14	PK
2485.5~2500	44.08	0.30	1.12	H	45.50	53.98	8.48	AV

 # Note :

* integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11n (HT20)
Transfer Rate:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	63.48	0.00	1.16	H	64.64	73.98	9.34	PK
2390.0	48.31	0.37	1.16	H	49.84	53.98	4.14	AV
2390.0	65.08	0.00	1.16	V	66.24	73.98	7.74	PK
2390.0	49.28	0.37	1.16	V	50.81	53.98	3.17	AV
2483.5	64.61	0.00	1.12	H	65.73	73.98	8.26	PK
2483.5	47.68	0.37	1.12	H	49.17	53.98	4.81	AV
2483.5	67.68	0.00	1.12	V	68.80	73.98	5.19	PK
2483.5	49.82	0.37	1.12	V	51.31	53.98	2.67	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	0
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	64.99	0.00	1.12	H	66.11	73.98	7.87	PK
2483.5	48.16	0.37	1.12	H	49.65	53.98	4.33	AV
2483.5	66.26	0.00	1.12	V	67.38	73.98	6.61	PK
2483.5	49.24	0.37	1.12	V	50.73	53.98	3.25	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5*(2484)	63.81	0.00	1.12	V	64.93	73.98	9.05	PK
2483.5*(2484)	49.13	0.37	1.12	V	50.62	53.98	3.36	AV
2483.5*(2485)	58.53	0.00	1.12	V	59.65	73.98	14.34	PK
2483.5*(2485)	44.48	0.37	1.12	V	45.97	53.98	8.01	AV
2485.5~2500	63.58	0.00	1.12	V	64.70	73.98	9.29	PK
2485.5~2500	43.48	0.37	1.12	V	44.97	53.98	9.01	AV
2483.5*(2484)	63.12	0.00	1.12	H	64.24	73.98	9.74	PK
2483.5*(2484)	49.01	0.37	1.12	H	50.50	53.98	3.48	AV
2483.5*(2485)	58.10	0.00	1.12	H	59.22	73.98	14.77	PK
2483.5*(2485)	44.19	0.37	1.12	H	45.68	53.98	8.30	AV
2485.5~2500	62.91	0.00	1.12	H	64.03	73.98	9.96	PK
2485.5~2500	43.25	0.37	1.12	H	44.74	53.98	9.24	AV

Note:

* integration method Used (ANSI C63.10 Section11.13.3)

▣ Test Plots (Worst case : Z-V)

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.13)_integration method Used 2484 MHz

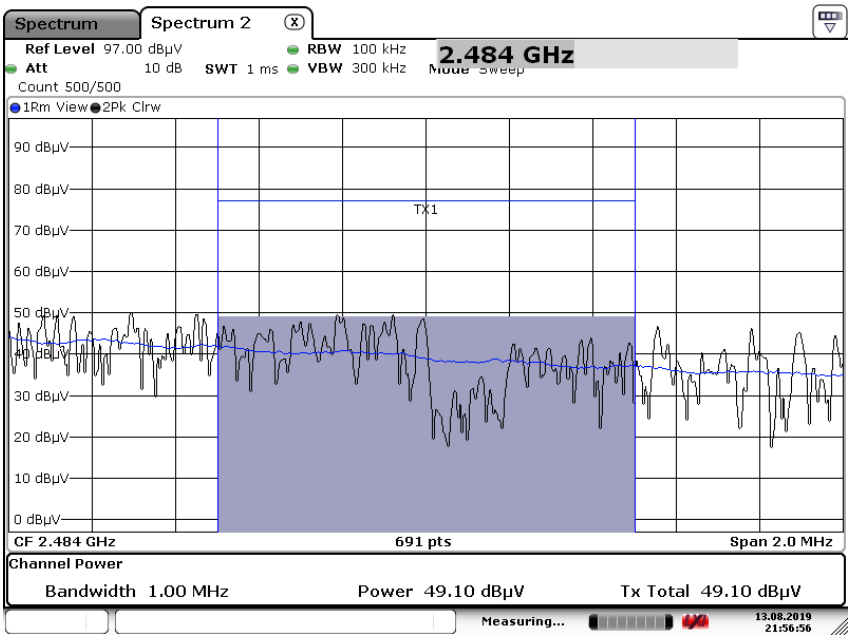

Date: 13.AUG.2019 21:56:56

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.13)_integration method Used 2484 MHz

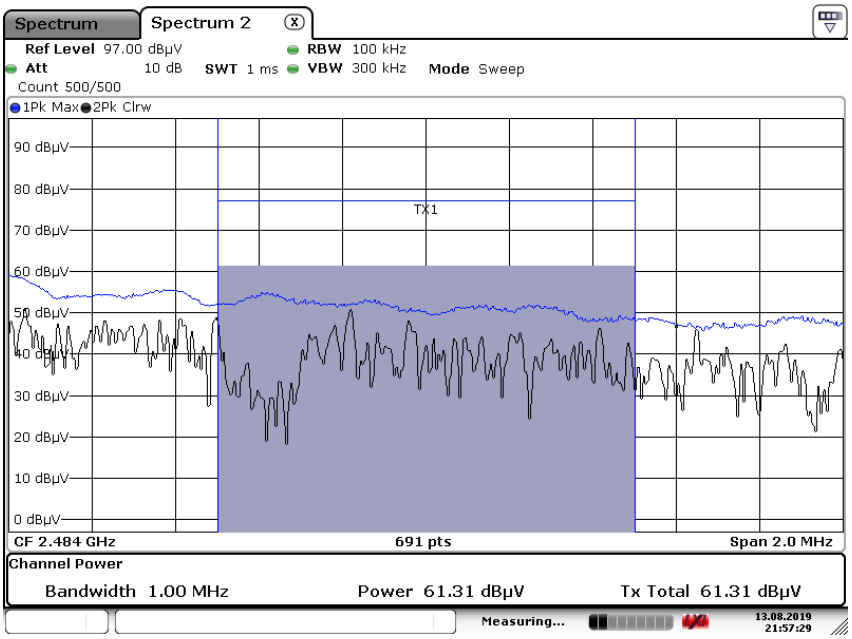

Date: 13.AUG.2019 21:57:29

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.13)_integration method Used 2485 MHz

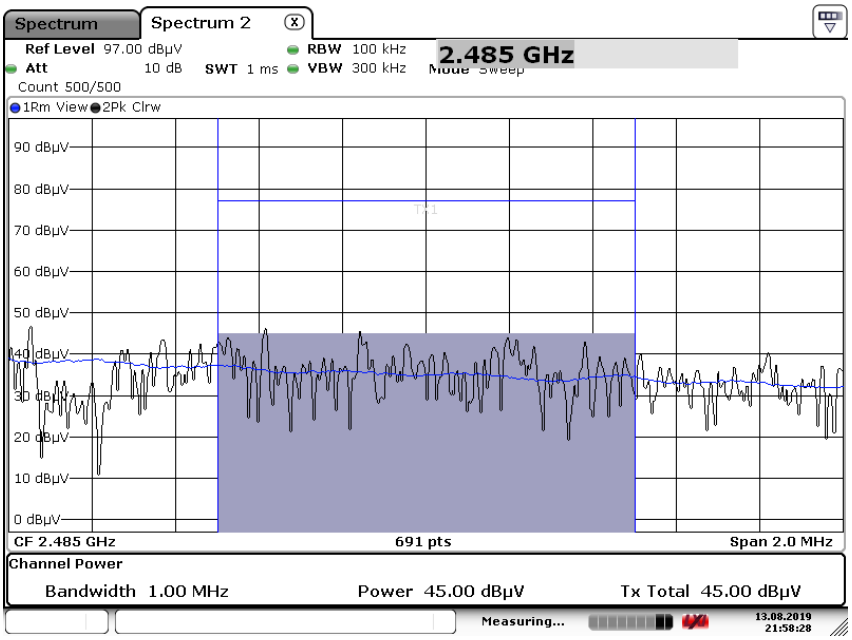

Date: 13.AUG.2019 21:58:28

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.13)_integration method Used 2485 MHz

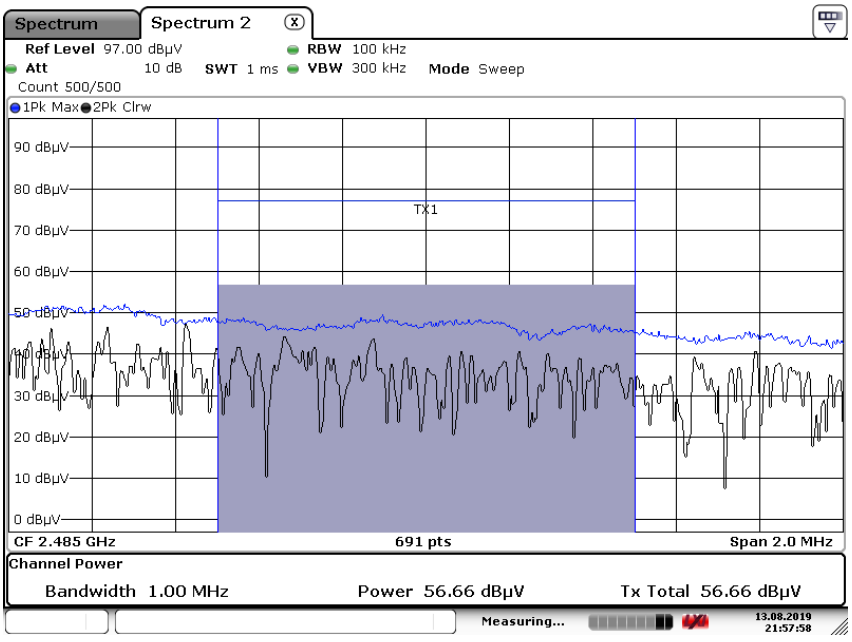

Date: 13.AUG.2019 21:57:59

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.13)_ 2485.5 MHz ~ 2500 MHz

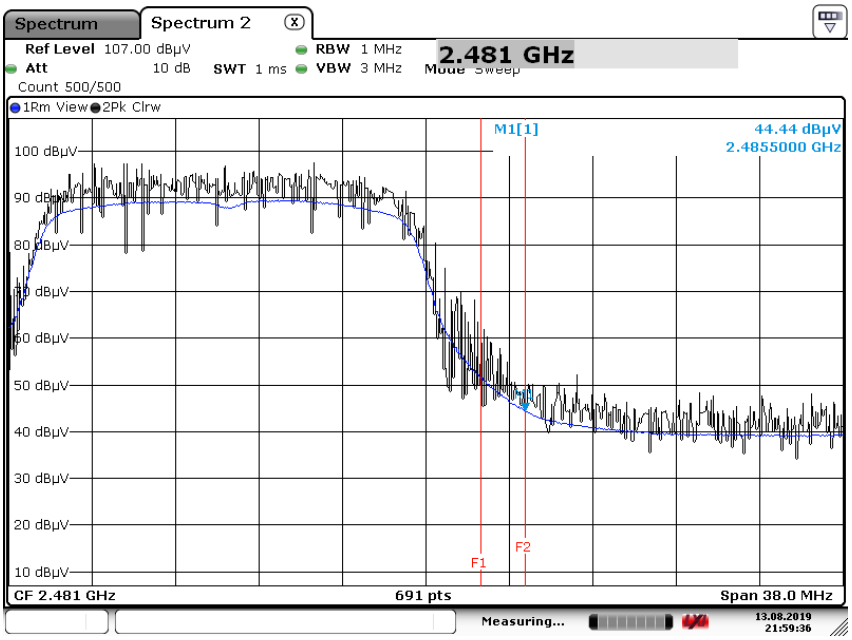

Date: 13.AUG.2019 21:59:36

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.13)_ 2 485.5 MHz ~ 2500 MHz

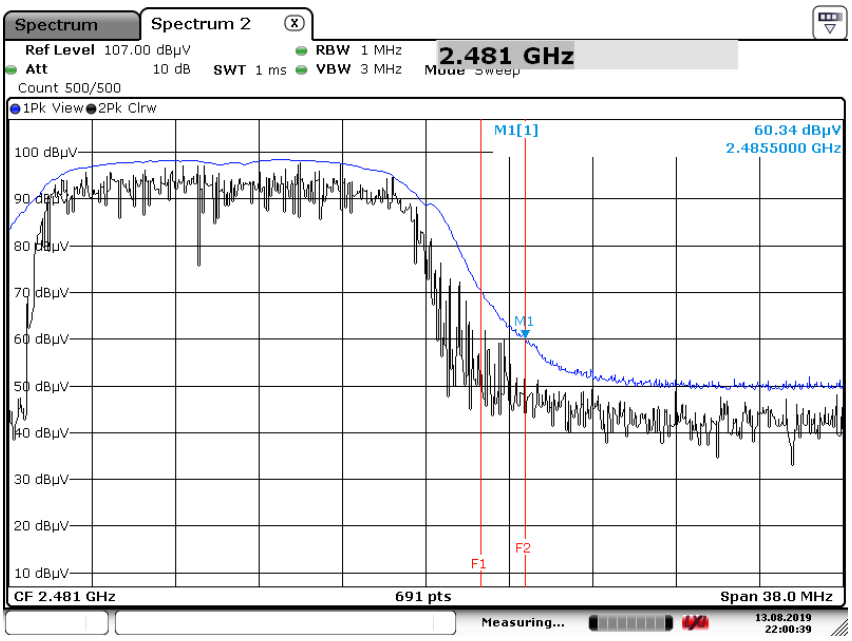

Date: 13.AUG.2019 22:00:39

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.11)

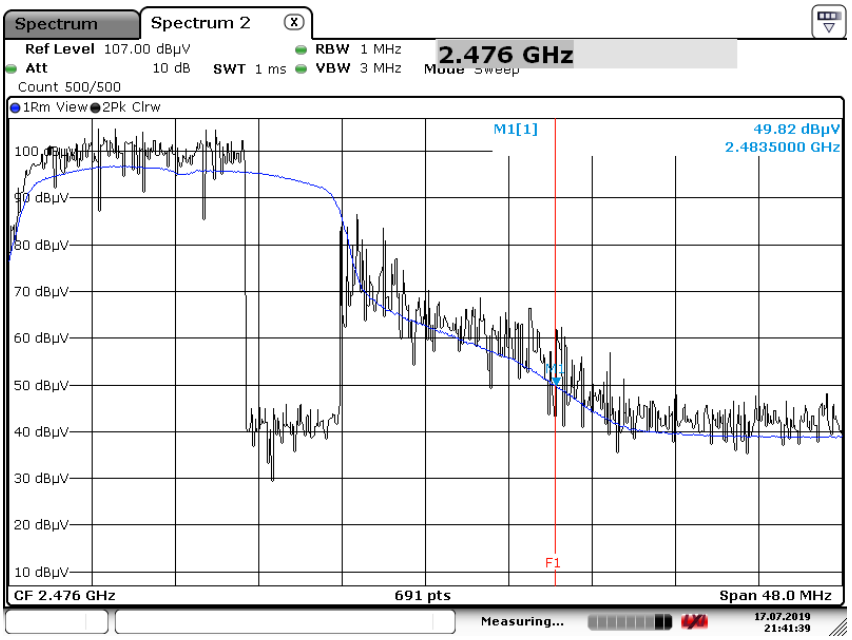

Date: 17.JUL.2019 21:41:39

Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.11)

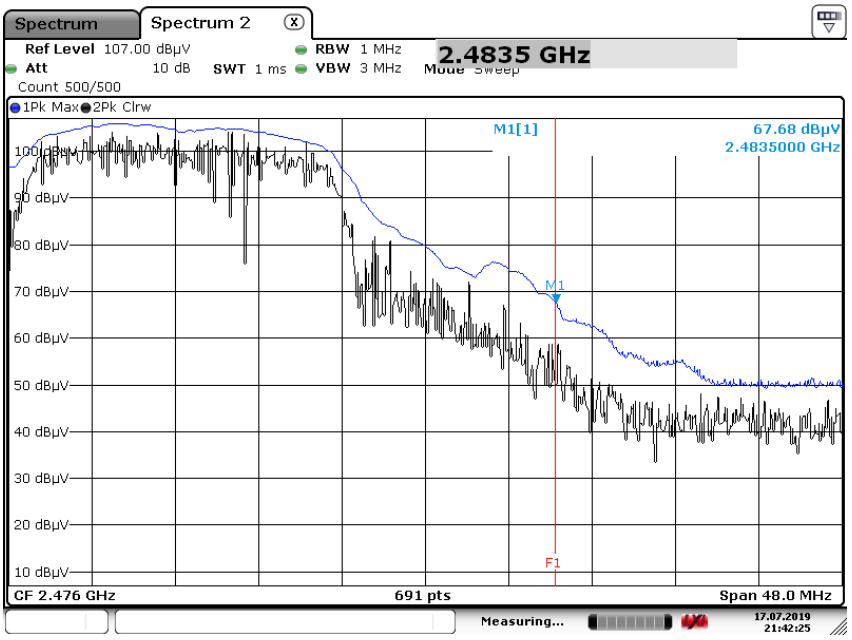

Date: 17.JUL.2019 21:42:25

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.13)_integration method Used 2484 MHz

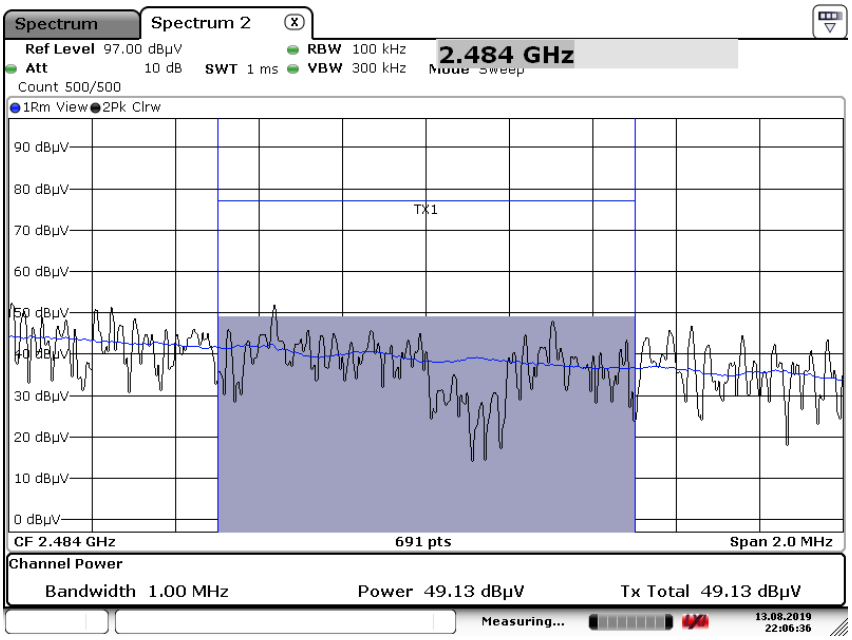

Date: 13.AUG.2019 22:06:36

Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.13)_integration method Used 2484 MHz

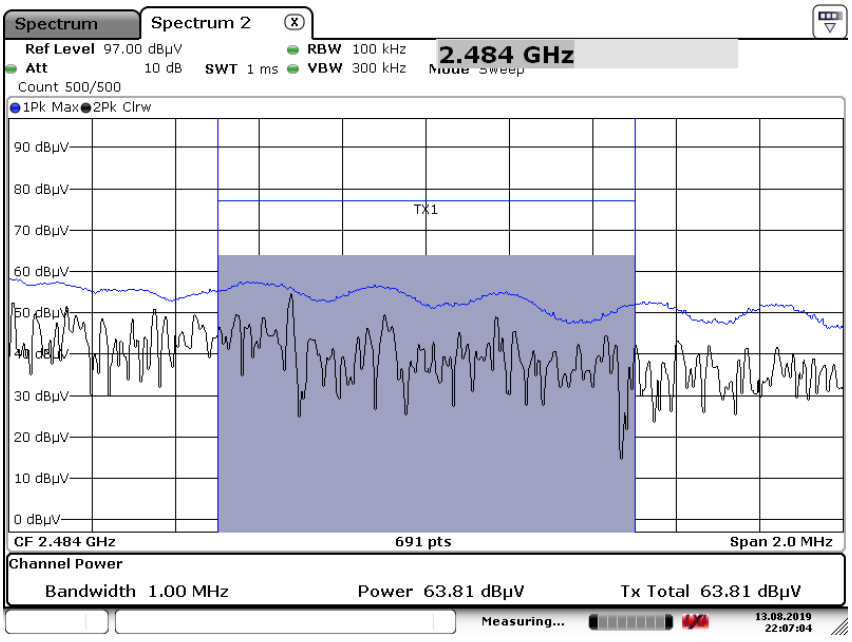

Date: 13.AUG.2019 22:07:04

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.13)_integration method Used 2485 MHz

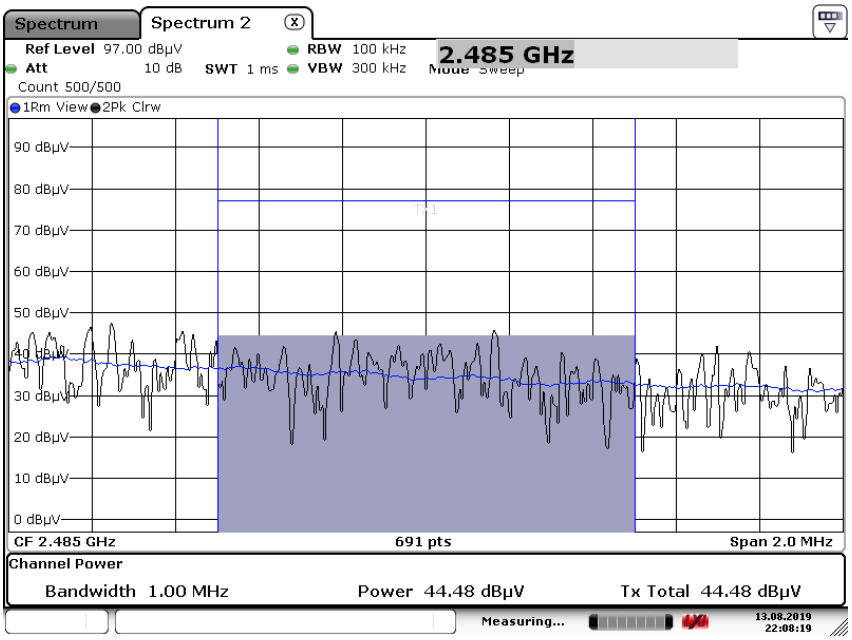

Date: 13.AUG.2019 22:08:19

Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.13)_integration method Used 2485 MHz

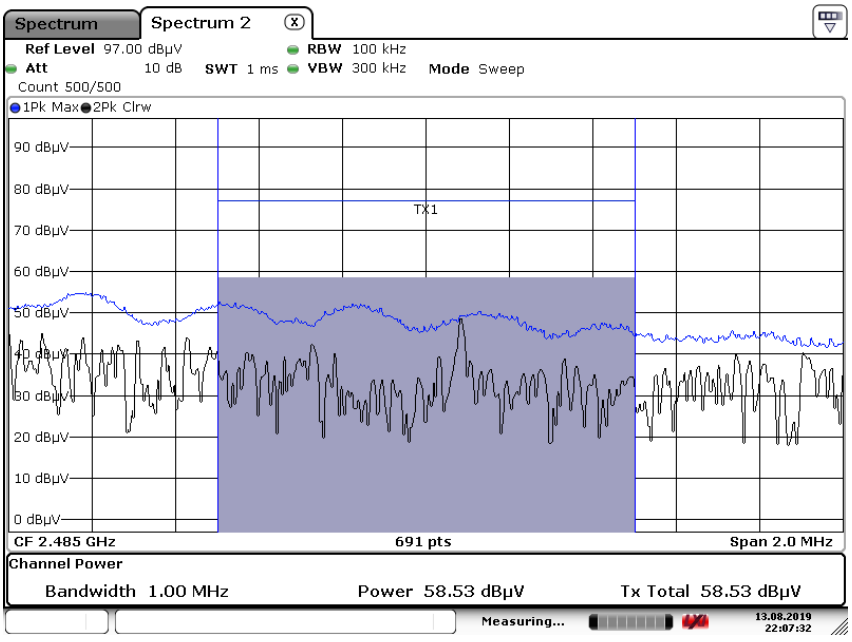

Date: 13.AUG.2019 22:07:33

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.13)_2485.5 MHz ~ 2500 MHz

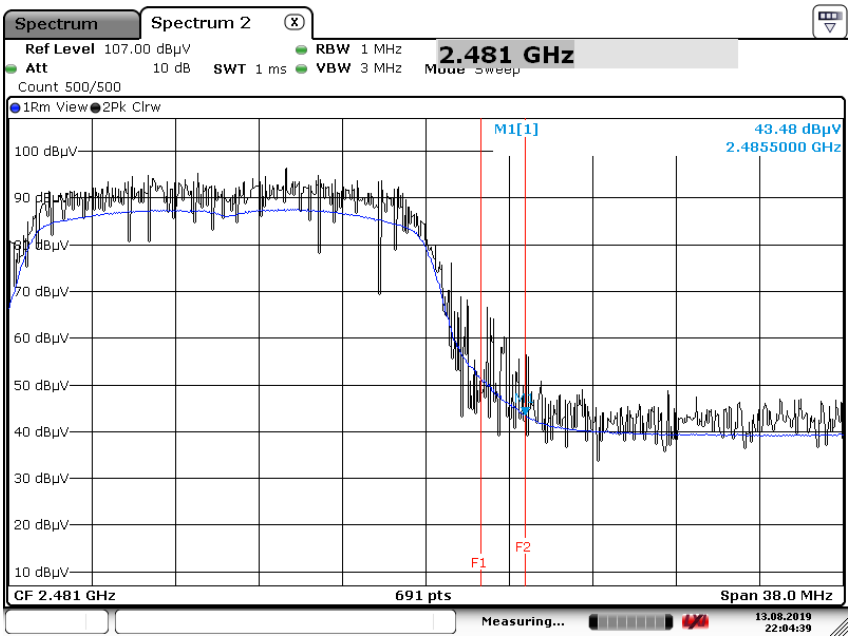

Date: 13.AUG.2019 22:04:39

Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.13)_ 2485.5 MHz ~ 2500 MHz

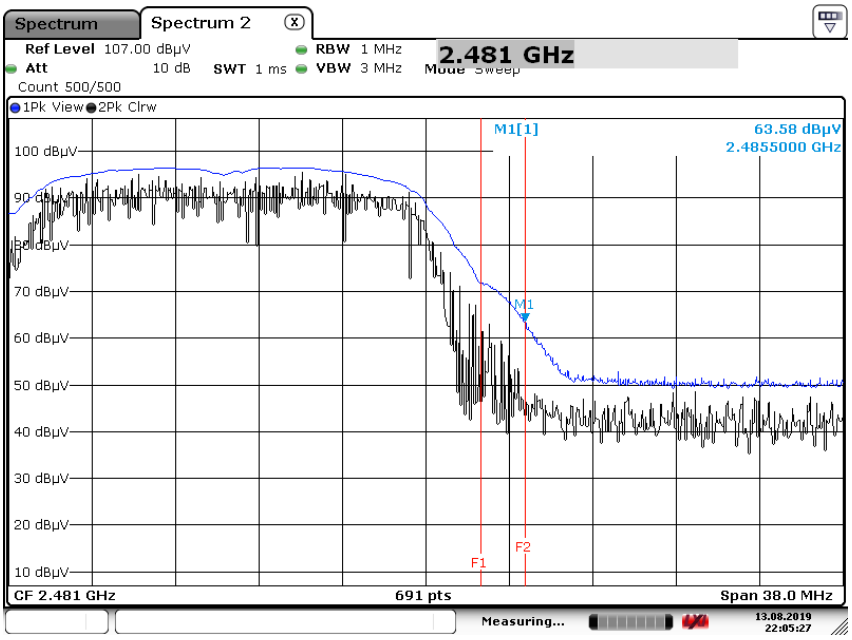

Date: 13.AUG.2019 22:05:27

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

2.4G WLAN MODE L1 1 / 2

HCT TEST Report

Common Information

EUT:	SM-A507FN/DS
Manufacturer:	SAMSUNG
Test Site:	SHIELD ROOM
Operating Conditions:	2.4G WLAN MODE L1

FCC CLASS B_Exten Cable

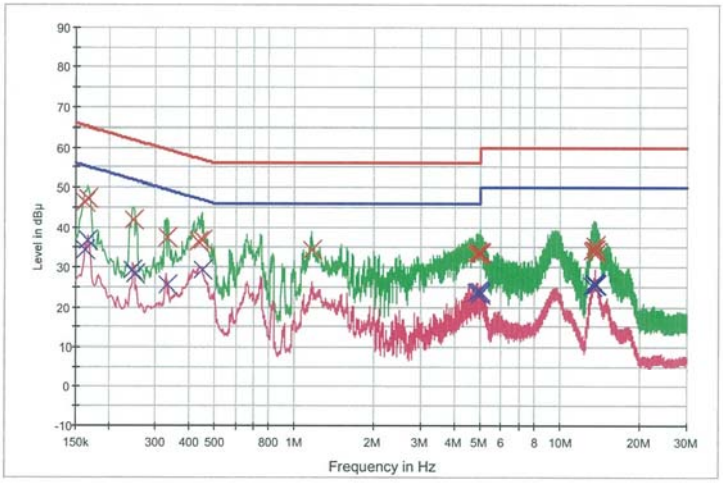

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.162000	46.4	9.000	Off	L1	9.7	19.0	65.4
0.166000	47.3	9.000	Off	L1	9.7	17.9	65.2
0.248000	41.8	9.000	Off	L1	9.7	20.0	61.8
0.334000	37.4	9.000	Off	L1	9.7	21.9	59.4
0.436000	36.3	9.000	Off	L1	9.7	20.8	57.1
0.448000	36.8	9.000	Off	L1	9.7	20.1	56.9
1.162000	34.3	9.000	Off	L1	9.8	21.7	56.0
4.826000	33.3	9.000	Off	L1	10.0	22.7	56.0
4.906000	33.9	9.000	Off	L1	10.0	22.1	56.0
4.978000	33.4	9.000	Off	L1	10.0	22.6	56.0
4.986000	33.8	9.000	Off	L1	10.0	22.2	56.0
4.998000	33.5	9.000	Off	L1	10.0	22.5	56.0
13.290000	34.1	9.000	Off	L1	10.3	25.9	60.0
13.460000	34.5	9.000	Off	L1	10.4	25.5	60.0
13.562000	35.4	9.000	Off	L1	10.4	24.6	60.0
13.598000	34.5	9.000	Off	L1	10.4	25.5	60.0
13.618000	34.3	9.000	Off	L1	10.4	25.7	60.0
13.668000	33.8	9.000	Off	L1	10.4	26.2	60.0

2019-07-24 오전 8:39:30

2.4G WLAN MODE L1 2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.162000	34.4	9.000	Off	L1	9.7	21.0	55.4
0.166000	36.9	9.000	Off	L1	9.7	18.3	55.2
0.246000	29.4	9.000	Off	L1	9.7	22.5	51.9
0.250000	28.3	9.000	Off	L1	9.7	23.5	51.8
0.334000	25.7	9.000	Off	L1	9.7	23.7	49.4
0.448000	29.4	9.000	Off	L1	9.7	17.5	46.9
4.826000	23.7	9.000	Off	L1	10.0	22.3	46.0
4.900000	23.7	9.000	Off	L1	10.0	22.3	46.0
4.904000	23.9	9.000	Off	L1	10.0	22.1	46.0
4.986000	23.9	9.000	Off	L1	10.0	22.1	46.0
4.994000	23.4	9.000	Off	L1	10.0	22.6	46.0
4.998000	23.2	9.000	Off	L1	10.0	22.8	46.0
13.290000	25.1	9.000	Off	L1	10.3	24.9	50.0
13.460000	25.9	9.000	Off	L1	10.4	24.1	50.0
13.598000	25.8	9.000	Off	L1	10.4	24.2	50.0
13.618000	25.7	9.000	Off	L1	10.4	24.3	50.0
13.668000	25.7	9.000	Off	L1	10.4	24.3	50.0
13.720000	25.5	9.000	Off	L1	10.4	24.5	50.0

2019-07-24 오전 8:39:30

Conducted Emissions (Line 2)

2.4G WLAN MODE N 1 / 2

HCT TEST Report

Common Information

EUT:	SM-A507FN/DS
Manufacturer:	SAMSUNG
Test Site:	SHIELD ROOM
Operating Conditions:	2.4G WLAN MODE N

FCC CLASS B_Exten Cable

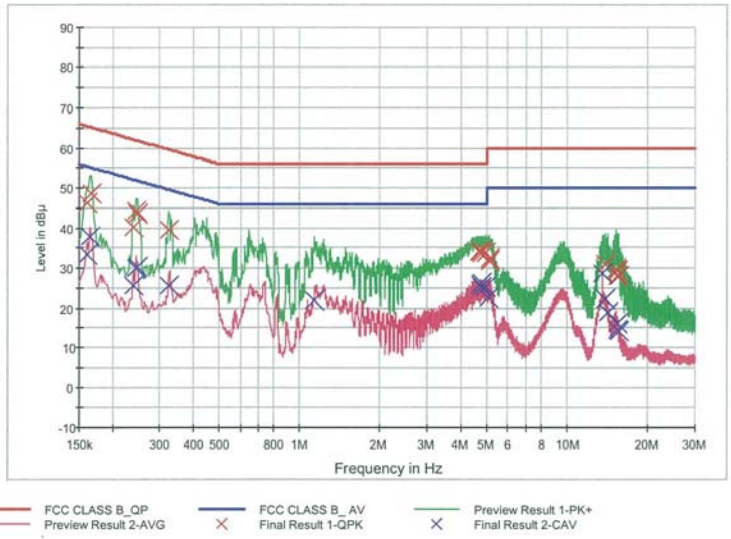

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	46.3	9.000	Off	N	9.8	19.1	65.5
0.166000	48.5	9.000	Off	N	9.8	16.7	65.2
0.240000	40.2	9.000	Off	N	9.9	21.9	62.1
0.244000	44.3	9.000	Off	N	9.9	17.7	62.0
0.248000	43.5	9.000	Off	N	9.9	18.3	61.8
0.324000	39.6	9.000	Off	N	9.9	20.0	59.6
4.648000	34.2	9.000	Off	N	10.2	21.8	56.0
4.718000	34.0	9.000	Off	N	10.2	22.0	56.0
4.792000	33.9	9.000	Off	N	10.2	22.1	56.0
4.968000	33.6	9.000	Off	N	10.2	22.4	56.0
5.106000	31.8	9.000	Off	N	10.2	28.2	60.0
5.134000	32.4	9.000	Off	N	10.2	27.6	60.0
13.814000	31.1	9.000	Off	N	10.6	28.9	60.0
13.822000	31.0	9.000	Off	N	10.6	29.0	60.0
15.308000	29.6	9.000	Off	N	10.7	30.4	60.0
15.324000	29.2	9.000	Off	N	10.7	30.8	60.0
15.460000	28.0	9.000	Off	N	10.7	32.0	60.0
15.500000	28.1	9.000	Off	N	10.7	31.9	60.0

2019-07-24 오전 8:30:29

2.4G WLAN MODE N 2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	33.3	9.000	Off	N	9.8	22.2	55.5
0.164000	37.8	9.000	Off	N	9.8	17.4	55.3
0.240000	25.4	9.000	Off	N	9.9	26.7	52.1
0.244000	30.0	9.000	Off	N	9.9	21.9	52.0
0.248000	30.4	9.000	Off	N	9.9	21.4	51.8
0.324000	25.5	9.000	Off	N	9.9	24.1	49.6
1.132000	21.8	9.000	Off	N	10.0	24.2	46.0
4.718000	26.0	9.000	Off	N	10.2	20.0	46.0
4.792000	25.1	9.000	Off	N	10.2	20.9	46.0
4.804000	26.1	9.000	Off	N	10.2	19.9	46.0
4.966000	25.3	9.000	Off	N	10.2	20.7	46.0
5.100000	22.5	9.000	Off	N	10.2	27.5	50.0
13.560000	28.8	9.000	Off	N	10.6	21.2	50.0
13.822000	22.3	9.000	Off	N	10.6	27.7	50.0
14.176000	18.7	9.000	Off	N	10.6	31.3	50.0
15.324000	16.0	9.000	Off	N	10.7	34.0	50.0
15.460000	14.4	9.000	Off	N	10.7	35.6	50.0
15.500000	13.9	9.000	Off	N	10.7	36.1	50.0

2019-07-24 오전 8:30:29

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9020A / Signal Analyzer	05/24/2019	Annual	MY52090906
Agilent	N9030A / Signal Analyzer	01/10/2019	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/24/2019	Annual	101231
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	05/23/2019	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/15/2019	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/01/2019	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/01/2019	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.

2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1908-FC003-P