



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

11/05/15 - 11/16/15

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1511051909-R1.A3L

FCC ID:

A3LSMA510M

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-A510M/DS

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.16	0.29	0.55
PCE	UMTS 850	826.40 - 846.60 MHz	0.16	0.25	0.44
PCE	UMTS 1750	1712.4 - 1752.5 MHz	0.23	0.74	1.04
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.14	0.45	1.09
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.27	0.79	1.01
PCE	LTE Band 17	706.5 - 713.5 MHz	< 0.1	0.17	0.24
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.14	0.23	0.47
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.24	0.81	1.06
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.21	0.54	1.03
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.80	0.11	0.22
NII	U-NII-1	5180 - 5240 MHz	N/A		
NII	U-NII-2A	5260 - 5320 MHz	0.36	< 0.1	
NII	U-NII-2C	5500 - 5720 MHz	0.68	< 0.1	
NII	U-NII-3	5745 - 5825 MHz	0.77	< 0.1	< 0.1
DSS/DTS	Bluetooth	2402 - 2480 MHz	N/A		
Simultaneous SAR per KDB 690783 D01v01r03:			1.06	0.96	1.31

Note: This revised Test Report (S/N: 0Y1511051909-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 1 of 78		

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	9
3	INTRODUCTION	10
4	DOSIMETRIC ASSESSMENT	11
5	DEFINITION OF REFERENCE POINTS	12
6	TEST CONFIGURATION POSITIONS FOR HANDSETS	13
7	RF EXPOSURE LIMITS	16
8	FCC MEASUREMENT PROCEDURES.....	17
9	RF CONDUCTED POWERS.....	22
10	SYSTEM VERIFICATION.....	55
11	SAR DATA SUMMARY	57
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	67
13	SAR MEASUREMENT VARIABILITY	72
14	EQUIPMENT LIST.....	73
15	MEASUREMENT UNCERTAINTIES	74
16	CONCLUSION.....	76
17	REFERENCES	77
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 2 of 78	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
2.4 GHz WLAN	Data	2412 - 2472 MHz
U-NII-1	Data	5180 - 5240 MHz
U-NII-2A	Data	5260 - 5320 MHz
U-NII-2C	Data	5500 - 5720 MHz
U-NII-3	Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
ANT+	Data	2402 - 2480 MHz
MST	Data	1 - 8.3 kHz

1.2 Power Reduction for SAR

This device utilizes a single step power reduction mechanism for SAR compliance under portable hotspot conditions for some wireless modes and bands. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. The reduced powers were confirmed via conducted power measurements at the RF port (see Section 9). Detailed descriptions of the hotspot power reduction are included in the operational description.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05r02.

1.3.1 Maximum Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)					Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	
GSM/GPRS/EDGE 850	Maximum	34.0	34.0	32.0	30.5	29.0	27.5	26.0	24.5	23.0	
	Nominal	33.5	33.5	31.5	30.0	28.5	27.0	25.5	24.0	22.5	
GSM/GPRS/EDGE 1900	Maximum	30.5	30.5	29.0	27.5	26.0	26.5	24.0	22.7	21.5	
	Nominal	30.0	30.0	28.5	27.0	25.5	26.0	23.5	22.2	21.0	

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 3 of 78	

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	23.5	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0	23.0
UMTS Band 4 (1750 MHz)	Maximum	23.5	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	23.5	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0	23.0

Mode / Band		Modulated Average (dBm)
LTE Band 17	Maximum	23.5
	Nominal	23.0
LTE Band 5 (Cell)	Maximum	23.0
	Nominal	22.5
LTE Band 4 (AWS)	Maximum	23.5
	Nominal	23.0
LTE Band 2 (PCS)	Maximum	23.0
	Nominal	22.5

Mode / Band		Modulated Average (dBm)	
		Channels 1-11	Channels 12-13
IEEE 802.11b (2.4 GHz)	Maximum	17.5	8.0
	Nominal	17.0	7.5
IEEE 802.11g (2.4 GHz)	Maximum	14.5	8.0
	Nominal	14.0	7.5
IEEE 802.11n (2.4 GHz)	Maximum	13.5	8.0
	Nominal	13.0	7.5

Mode / Band		Modulated Average (dBm)	
		20 MHz Bandwidth	40 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	12.5	
	Nominal	12.0	
IEEE 802.11n (5 GHz)	Maximum	12.5	12.5
	Nominal	12.0	12.0

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 4 of 78	

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	10.5
	Nominal	10.0
Bluetooth LE	Maximum	5.5
	Nominal	5.0

1.3.2 Reduced Power – Hotspot Mode Active

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 1900	Maximum	N/A	29.0	26.5	25.0	23.5	26.5	23.5	22.0	20.5
	Nominal	N/A	28.5	26.0	24.5	23.0	26.0	23.0	21.5	20.0

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	20.5	20.5	20.5	20.5
	Nominal	20.0	20.0	20.0	20.0
UMTS Band 2 (1900 MHz)	Maximum	20.5	20.5	20.5	20.5
	Nominal	20.0	20.0	20.0	20.0

Mode / Band		Modulated Average (dBm)
LTE Band 4 (AWS)	Maximum	20.5
	Nominal	20.0
LTE Band 2 (PCS)	Maximum	20.0
	Nominal	19.5

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 5 of 78

1.4 DUT Antenna Locations

The overall dimensions of this device are $\geq 9 \times 5$ cm. The overall diagonal dimension of the device is ≤ 160 mm and the diagonal display is ≤ 150 mm. A diagram showing the location of the device antennas can be found in Appendix F.

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 17	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02 guidance, page 2. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, UNII-2A, UNII-2C WLAN operations are disabled. Therefore U-NII-1, UNII-2A, UNII-2C WLAN operations are not considered in this section.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device. Therefore, all SAR tests were performed with the NFC incorporated. A diagram showing the location of the NFC antenna can be found in Appendix F.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v05r02, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

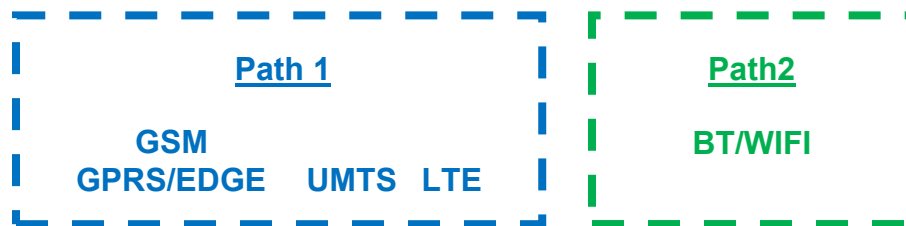


Figure 1-1
Simultaneous Transmission Paths

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 6 of 78	

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05r02 3) procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router
1	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A
2	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A
3	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A
4	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes
5	UMTS + 5 GHz WI-FI	Yes	Yes	Yes
6	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A
7	LTE + 2.4 GHz WI-FI	Yes	Yes	Yes
8	LTE + 5 GHz WI-FI	Yes	Yes	Yes
9	LTE + 2.4 GHz Bluetooth	N/A	Yes	N/A
10	GPRS/EDGE + 2.4 GHz WI-FI	N/A	N/A	Yes
11	GPRS/EDGE + 5 GHz WI-FI	N/A	N/A	Yes
12	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	N/A

1. 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02.

Per FCC KDB 447498 D01v05r02, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(11/15) * \sqrt{2.480}] = 1.2 < 3.0$. Per KDB Publication 447498 D01v05r02, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports channel 1-13 for 2.4 GHz WLAN. However, due to the reduced output power for channels 12 and 13, channels 1, 6, and 11 were considered for SAR testing per KDB 248227 D01v02r01.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 7 of 78

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r03.

1.8 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01v03, D05v02r03, D06v02 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r01 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r01 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number
GSM/GPRS/EDGE 850	4720B	4729B	4729B
UMTS 850	4720B	4720B	4720B
UMTS 1750	4729B	4720B	4729B
GSM/GPRS/EDGE 1900	4729B	4720B	4729B
UMTS 1900	4729B	4720B	4729B
LTE Band 17	4729B	E7207	E7207
LTE Band 5 (Cell)	4720B	4720B	4720B
LTE Band 4 (AWS)	4729B	4729B	4729B
LTE Band 2 (PCS)	4729B	4729B	4729B
2.4 GHz WLAN	E7207	5721B	E7207
5 GHz WLAN	5721B	E7207	E7207

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset

2

LTE INFORMATION

LTE Information			
FCC ID	A3LSMA510M		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
UE Category	6		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		
LTE Release 10 Additional Information	This device does not support full CA features on 3GPP Release 10 in the US. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: LTE Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eICI, WIFI Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.		

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 9 of 78	

3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 10 of 78	

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.





Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 11 of 78

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

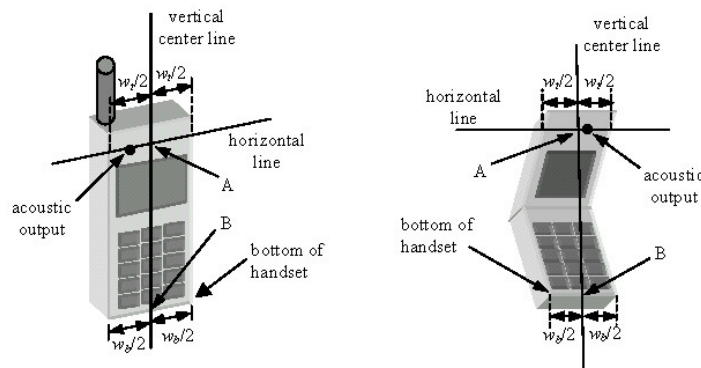


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 12 of 78

6

TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

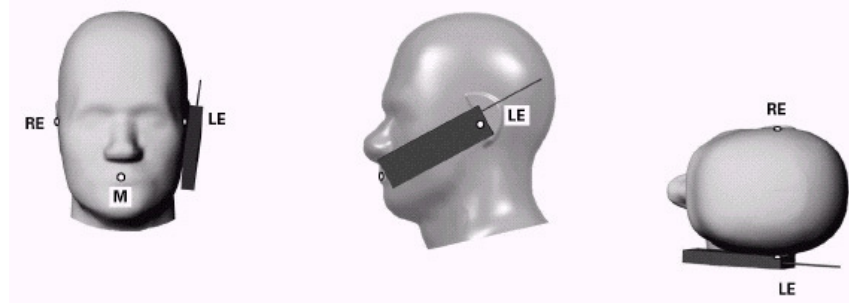


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 13 of 78

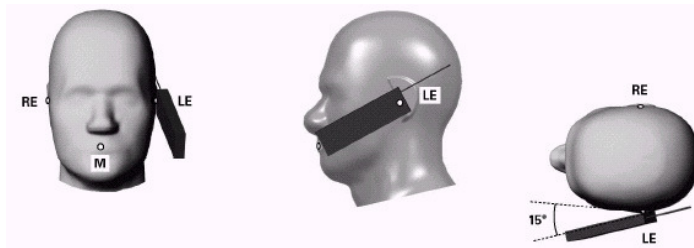


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r02. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r02, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

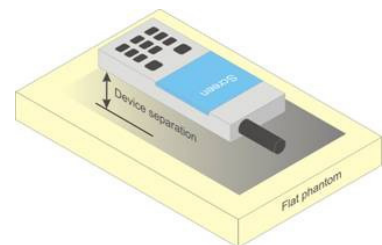


Figure 6-4 Sample Body-Worn Diagram

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 14 of 78

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v05r02 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v05r02, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 15 of 78	

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 16 of 78	

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05r02, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
		Page 17 of 78

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r03 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 18 of 78	

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r03:

- a. Per Section 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 4.2.1.
- c. Per Section 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 4.2.4 and 4.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 4.2.1 through 4.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r01 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 19 of 78	

scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 20 of 78

rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6).

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 21 of 78	

9 RF CONDUCTED POWERS

9.1 GSM Conducted Powers

9.1.1 Maximum Conducted Powers

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.81	33.85	31.66	30.09	28.72	27.20	25.35	24.21	22.64
	190	33.85	33.88	31.74	30.17	28.81	27.24	25.44	24.25	22.57
	251	33.71	33.72	31.60	30.03	28.53	27.17	25.16	24.00	22.47
GSM 1900	512	30.40	30.36	28.92	27.28	25.56	26.07	23.86	22.46	21.33
	661	30.17	30.15	28.91	27.31	25.72	25.94	23.88	22.50	21.27
	810	30.02	29.99	28.91	27.42	25.73	26.10	23.92	22.43	21.41

		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.78	24.82	25.64	25.83	25.71	18.17	19.33	19.95	19.63
	190	24.82	24.85	25.72	25.91	25.80	18.21	19.42	19.99	19.56
	251	24.68	24.69	25.58	25.77	25.52	18.14	19.14	19.74	19.46
GSM 1900	512	21.37	21.33	22.90	23.02	22.55	17.04	17.84	18.20	18.32
	661	21.14	21.12	22.89	23.05	22.71	16.91	17.86	18.24	18.26
	810	20.99	20.96	22.89	23.16	22.72	17.07	17.90	18.17	18.40
GSM 850	Frame	24.47	24.47	25.48	25.74	25.49	17.97	19.48	19.74	19.49
GSM 1900	Avg.Targets:	20.97	20.97	22.48	22.74	22.49	16.97	17.48	17.94	17.99

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 22 of 78

9.1.2 Reduced Conducted Powers - Hotspot Mode Active

		Maximum Burst-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	29.00	26.14	24.61	22.21	26.03	23.22	21.43	20.20
	661	28.98	26.12	24.75	22.39	26.15	23.50	21.85	20.16
	810	28.94	26.25	24.86	22.42	26.01	23.48	21.91	20.45

		Calculated Maximum Frame-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	19.97	20.12	20.35	19.20	17.00	17.20	17.17	17.19
	661	19.95	20.10	20.49	19.38	17.12	17.48	17.59	17.15
	810	19.91	20.23	20.60	19.41	16.98	17.46	17.65	17.44
GSM 1900	Frame Avg. Targets:	19.47	19.98	20.24	19.99	16.97	16.98	17.24	16.99

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A




Figure 9-1
Power Measurement Setup

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 23 of 78	

9.2 UMTS Conducted Powers

9.2.1 Maximum Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.38	23.39	23.31	23.28	23.50	23.47	22.86	22.79	22.75	-
99		12.2 kbps AMR	22.96	22.95	22.86	23.35	23.49	23.46	22.46	22.41	22.30	-
6	HSDPA	Subtest 1	23.12	23.14	23.16	22.58	22.79	22.81	22.97	22.99	22.96	0
6		Subtest 2	23.14	23.16	23.18	22.36	22.62	22.66	22.16	22.11	22.15	0
6		Subtest 3	22.16	22.20	22.20	22.44	22.69	22.73	22.60	22.52	22.50	0.5
6		Subtest 4	22.16	22.18	22.17	21.38	21.61	21.61	21.75	21.66	21.77	0.5
6	HSUPA	Subtest 1	21.08	21.09	21.12	21.25	21.50	21.53	20.45	20.37	20.48	0
6		Subtest 2	19.19	19.22	19.23	18.30	18.49	18.44	18.41	18.45	18.26	2
6		Subtest 3	22.10	22.18	22.17	21.40	21.80	21.82	22.00	21.92	21.93	1
6		Subtest 4	19.13	19.16	19.15	18.30	18.54	18.60	18.38	18.35	18.26	2
6		Subtest 5	23.06	23.10	23.15	22.58	22.82	22.86	23.00	22.98	22.99	0
8	DC-HSDPA	Subtest 1	23.25	23.26	23.17	22.60	23.00	23.02	23.42	23.25	23.28	0
8		Subtest 2	23.28	23.28	23.20	22.50	22.91	22.91	22.92	22.82	22.83	0
8		Subtest 3	22.72	22.75	22.70	21.71	22.05	22.02	21.76	21.71	21.75	0.5
8		Subtest 4	22.25	22.26	22.20	21.37	21.79	21.79	22.09	21.93	22.06	0.5

9.2.2 Reduced Conducted Powers - Hotspot Mode Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	20.27	20.50	20.49	19.91	19.94	20.05	-
99		12.2 kbps AMR	20.22	20.45	20.47	19.92	19.94	20.00	-
6	HSDPA	Subtest 1	19.60	19.88	19.89	20.02	19.95	20.00	0
6		Subtest 2	19.62	19.86	19.89	20.03	19.98	19.96	0
6		Subtest 3	19.67	19.95	19.95	20.09	19.98	20.00	0.5
6		Subtest 4	19.68	19.93	19.94	20.08	20.01	20.03	0.5
6	HSUPA	Subtest 1	18.50	18.67	18.71	19.00	18.85	18.90	0
6		Subtest 2	18.20	18.53	18.54	18.44	18.32	18.26	2
6		Subtest 3	18.46	18.71	18.74	19.02	18.91	18.90	1
6		Subtest 4	18.20	18.55	18.56	18.50	18.39	18.31	2
6		Subtest 5	19.66	19.89	19.91	20.06	20.00	20.00	0
8	DC-HSDPA	Subtest 1	19.64	20.08	20.08	20.36	20.23	20.30	0
8		Subtest 2	19.67	20.09	20.09	20.39	20.27	20.27	0
8		Subtest 3	19.68	20.12	20.11	20.38	20.23	20.29	0.5
8		Subtest 4	19.70	20.12	20.12	20.30	20.28	20.33	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 9-2
Power Measurement Setup

FCC ID: A3LSMA510M	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 24 of 78

9.3 LTE Conducted Powers

9.3.1 LTE Band 17

Table 9-1
LTE Band 17 Conducted Powers - 10 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	710.0	23790	10	QPSK	1	0	23.50	0	0
	710.0	23790	10	QPSK	1	25	23.45	0	0
	710.0	23790	10	QPSK	1	49	23.47	0	0
	710.0	23790	10	QPSK	25	0	22.15	0-1	1
	710.0	23790	10	QPSK	25	12	22.16	0-1	1
	710.0	23790	10	QPSK	25	25	22.15	0-1	1
	710.0	23790	10	QPSK	50	0	22.14	0-1	1
	710.0	23790	10	16QAM	1	0	21.87	0-1	1
	710.0	23790	10	16QAM	1	25	21.82	0-1	1
	710.0	23790	10	16QAM	1	49	21.80	0-1	1
	710.0	23790	10	16QAM	25	0	21.08	0-2	2
	710.0	23790	10	16QAM	25	12	21.01	0-2	2
	710.0	23790	10	16QAM	25	25	21.05	0-2	2
	710.0	23790	10	16QAM	50	0	21.11	0-2	2

Note: LTE Band 17 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-2
LTE Band 17 Conducted Powers - 5 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	710.0	23790	5	QPSK	1	0	23.13	0	0
	710.0	23790	5	QPSK	1	12	23.01	0	0
	710.0	23790	5	QPSK	1	24	23.10	0	0
	710.0	23790	5	QPSK	12	0	22.08	0-1	1
	710.0	23790	5	QPSK	12	6	22.06	0-1	1
	710.0	23790	5	QPSK	12	13	22.05	0-1	1
	710.0	23790	5	QPSK	25	0	22.04	0-1	1
	710.0	23790	5	16-QAM	1	0	21.98	0-1	1
	710.0	23790	5	16-QAM	1	12	21.90	0-1	1
	710.0	23790	5	16-QAM	1	24	22.03	0-1	1
	710.0	23790	5	16-QAM	12	0	21.05	0-2	2
	710.0	23790	5	16-QAM	12	6	20.99	0-2	2
	710.0	23790	5	16-QAM	12	13	21.02	0-2	2
	710.0	23790	5	16-QAM	25	0	21.10	0-2	2

Note: LTE Band 17 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 25 of 78	

9.3.2

LTE Band 5 (Cell)

Table 9-3
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	22.99	0	0
	836.5	20525	10	QPSK	1	25	23.00	0	0
	836.5	20525	10	QPSK	1	49	22.85	0	0
	836.5	20525	10	QPSK	25	0	21.91	0-1	1
	836.5	20525	10	QPSK	25	12	21.86	0-1	1
	836.5	20525	10	QPSK	25	25	21.84	0-1	1
	836.5	20525	10	QPSK	50	0	21.90	0-1	1
	836.5	20525	10	16QAM	1	0	21.91	0-1	1
	836.5	20525	10	16QAM	1	25	21.86	0-1	1
	836.5	20525	10	16QAM	1	49	21.82	0-1	1
	836.5	20525	10	16QAM	25	0	21.00	0-2	2
	836.5	20525	10	16QAM	25	12	20.98	0-2	2
	836.5	20525	10	16QAM	25	25	20.95	0-2	2
	836.5	20525	10	16QAM	50	0	21.00	0-2	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset

Table 9-4
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	23.00	0	0
	826.5	20425	5	QPSK	1	12	22.93	0	0
	826.5	20425	5	QPSK	1	24	22.97	0	0
	826.5	20425	5	QPSK	12	0	21.94	0-1	1
	826.5	20425	5	QPSK	12	6	21.93	0-1	1
	826.5	20425	5	QPSK	12	13	21.93	0-1	1
	826.5	20425	5	QPSK	25	0	21.93	0-1	1
	826.5	20425	5	16-QAM	1	0	21.75	0-1	1
	826.5	20425	5	16-QAM	1	12	21.80	0-1	1
	826.5	20425	5	16-QAM	1	24	21.72	0-1	1
	826.5	20425	5	16-QAM	12	0	20.87	0-2	2
	826.5	20425	5	16-QAM	12	6	20.93	0-2	2
	826.5	20425	5	16-QAM	12	13	20.91	0-2	2
Mid	826.5	20425	5	16-QAM	25	0	21.00	0-2	2
	836.5	20525	5	QPSK	1	0	22.99	0	0
	836.5	20525	5	QPSK	1	12	22.98	0	0
	836.5	20525	5	QPSK	1	24	23.00	0	0
	836.5	20525	5	QPSK	12	0	21.86	0-1	1
	836.5	20525	5	QPSK	12	6	21.89	0-1	1
	836.5	20525	5	QPSK	12	13	21.87	0-1	1
	836.5	20525	5	QPSK	25	0	21.89	0-1	1
	836.5	20525	5	16-QAM	1	0	21.68	0-1	1
	836.5	20525	5	16-QAM	1	12	21.54	0-1	1
	836.5	20525	5	16-QAM	1	24	21.76	0-1	1
	836.5	20525	5	16-QAM	12	0	20.93	0-2	2
	836.5	20525	5	16-QAM	12	6	20.93	0-2	2
	836.5	20525	5	16-QAM	12	13	20.94	0-2	2
High	836.5	20525	5	16-QAM	25	0	21.00	0-2	2
	846.5	20625	5	QPSK	1	0	22.99	0	0
	846.5	20625	5	QPSK	1	12	22.97	0	0
	846.5	20625	5	QPSK	1	24	23.00	0	0
	846.5	20625	5	QPSK	12	0	21.88	0-1	1
	846.5	20625	5	QPSK	12	6	21.86	0-1	1
	846.5	20625	5	QPSK	12	13	21.85	0-1	1
	846.5	20625	5	QPSK	25	0	21.85	0-1	1
	846.5	20625	5	16-QAM	1	0	21.58	0-1	1
	846.5	20625	5	16-QAM	1	12	21.57	0-1	1
	846.5	20625	5	16-QAM	1	24	21.64	0-1	1
	846.5	20625	5	16-QAM	12	0	20.93	0-2	2
	846.5	20625	5	16-QAM	12	6	20.89	0-2	2
	846.5	20625	5	16-QAM	12	13	20.93	0-2	2
	846.5	20625	5	16-QAM	25	0	21.00	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 27 of 78		

Table 9-5
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	825.5	20415	3	QPSK	1	0	23.00	0	0
	825.5	20415	3	QPSK	1	7	22.97	0	0
	825.5	20415	3	QPSK	1	14	22.98	0	0
	825.5	20415	3	QPSK	8	0	21.95	0-1	1
	825.5	20415	3	QPSK	8	4	21.94	0-1	1
	825.5	20415	3	QPSK	8	7	21.97	0-1	1
	825.5	20415	3	QPSK	15	0	21.98	0-1	1
	825.5	20415	3	16-QAM	1	0	21.94	0-1	1
	825.5	20415	3	16-QAM	1	7	21.67	0-1	1
	825.5	20415	3	16-QAM	1	14	21.76	0-1	1
	825.5	20415	3	16-QAM	8	0	20.99	0-2	2
	825.5	20415	3	16-QAM	8	4	20.91	0-2	2
	825.5	20415	3	16-QAM	8	7	20.99	0-2	2
Mid	825.5	20415	3	16-QAM	15	0	20.95	0-2	2
	836.5	20525	3	QPSK	1	0	22.97	0	0
	836.5	20525	3	QPSK	1	7	22.98	0	0
	836.5	20525	3	QPSK	1	14	23.00	0	0
	836.5	20525	3	QPSK	8	0	21.92	0-1	1
	836.5	20525	3	QPSK	8	4	21.89	0-1	1
	836.5	20525	3	QPSK	8	7	21.90	0-1	1
	836.5	20525	3	QPSK	15	0	21.94	0-1	1
	836.5	20525	3	16-QAM	1	0	22.00	0-1	1
	836.5	20525	3	16-QAM	1	7	21.97	0-1	1
	836.5	20525	3	16-QAM	1	14	21.94	0-1	1
	836.5	20525	3	16-QAM	8	0	20.98	0-2	2
	836.5	20525	3	16-QAM	8	4	21.00	0-2	2
High	836.5	20525	3	16-QAM	8	7	20.97	0-2	2
	836.5	20525	3	16-QAM	15	0	21.00	0-2	2
	847.5	20635	3	QPSK	1	0	22.99	0	0
	847.5	20635	3	QPSK	1	7	22.97	0	0
	847.5	20635	3	QPSK	1	14	23.00	0	0
	847.5	20635	3	QPSK	8	0	21.88	0-1	1
	847.5	20635	3	QPSK	8	4	21.85	0-1	1
	847.5	20635	3	QPSK	8	7	21.86	0-1	1
	847.5	20635	3	QPSK	15	0	21.90	0-1	1
	847.5	20635	3	16-QAM	1	0	21.98	0-1	1
	847.5	20635	3	16-QAM	1	7	21.98	0-1	1
	847.5	20635	3	16-QAM	1	14	22.00	0-1	1
	847.5	20635	3	16-QAM	8	0	20.91	0-2	2
	847.5	20635	3	16-QAM	8	4	20.92	0-2	2
	847.5	20635	3	16-QAM	8	7	20.92	0-2	2
	847.5	20635	3	16-QAM	15	0	21.00	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 28 of 78		

Table 9-6
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	824.7	20407	1.4	QPSK	1	0	22.97	0	0
	824.7	20407	1.4	QPSK	1	2	22.98	0	0
	824.7	20407	1.4	QPSK	1	5	23.00	0	0
	824.7	20407	1.4	QPSK	3	0	22.94	0	0
	824.7	20407	1.4	QPSK	3	2	22.95	0	0
	824.7	20407	1.4	QPSK	3	3	22.94	0	0
	824.7	20407	1.4	QPSK	6	0	21.91	0-1	1
	824.7	20407	1.4	16-QAM	1	0	21.91	0-1	1
	824.7	20407	1.4	16-QAM	1	2	21.88	0-1	1
	824.7	20407	1.4	16-QAM	1	5	21.97	0-1	1
	824.7	20407	1.4	16-QAM	3	0	21.89	0-1	1
	824.7	20407	1.4	16-QAM	3	2	21.89	0-1	1
	824.7	20407	1.4	16-QAM	3	3	21.84	0-1	1
	824.7	20407	1.4	16-QAM	6	0	21.00	0-2	2
Mid	836.5	20525	1.4	QPSK	1	0	22.99	0	0
	836.5	20525	1.4	QPSK	1	2	22.99	0	0
	836.5	20525	1.4	QPSK	1	5	23.00	0	0
	836.5	20525	1.4	QPSK	3	0	22.96	0	0
	836.5	20525	1.4	QPSK	3	2	22.96	0	0
	836.5	20525	1.4	QPSK	3	3	22.97	0	0
	836.5	20525	1.4	QPSK	6	0	21.90	0-1	1
	836.5	20525	1.4	16-QAM	1	0	21.83	0-1	1
	836.5	20525	1.4	16-QAM	1	2	21.91	0-1	1
	836.5	20525	1.4	16-QAM	1	5	21.93	0-1	1
	836.5	20525	1.4	16-QAM	3	0	21.81	0-1	1
	836.5	20525	1.4	16-QAM	3	2	21.84	0-1	1
	836.5	20525	1.4	16-QAM	3	3	21.90	0-1	1
	836.5	20525	1.4	16-QAM	6	0	20.92	0-2	2
High	848.3	20643	1.4	QPSK	1	0	22.99	0	0
	848.3	20643	1.4	QPSK	1	2	23.00	0	0
	848.3	20643	1.4	QPSK	1	5	23.00	0	0
	848.3	20643	1.4	QPSK	3	0	22.96	0	0
	848.3	20643	1.4	QPSK	3	2	22.99	0	0
	848.3	20643	1.4	QPSK	3	3	22.98	0	0
	848.3	20643	1.4	QPSK	6	0	21.86	0-1	1
	848.3	20643	1.4	16-QAM	1	0	21.86	0-1	1
	848.3	20643	1.4	16-QAM	1	2	21.97	0-1	1
	848.3	20643	1.4	16-QAM	1	5	21.83	0-1	1
	848.3	20643	1.4	16-QAM	3	0	21.85	0-1	1
	848.3	20643	1.4	16-QAM	3	2	21.87	0-1	1
	848.3	20643	1.4	16-QAM	3	3	21.85	0-1	1
	848.3	20643	1.4	16-QAM	6	0	20.97	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 29 of 78		

9.3.3

LTE Band 4 (AWS)

Table 9-7
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	23.40	0	0
	1732.5	20175	20	QPSK	1	50	23.46	0	0
	1732.5	20175	20	QPSK	1	99	23.42	0	0
	1732.5	20175	20	QPSK	50	0	22.34	0-1	1
	1732.5	20175	20	QPSK	50	25	22.36	0-1	1
	1732.5	20175	20	QPSK	50	50	22.34	0-1	1
	1732.5	20175	20	QPSK	100	0	22.33	0-1	1
	1732.5	20175	20	16QAM	1	0	22.33	0-1	1
	1732.5	20175	20	16QAM	1	50	22.34	0-1	1
	1732.5	20175	20	16QAM	1	99	22.35	0-1	1
	1732.5	20175	20	16QAM	50	0	21.30	0-2	2
	1732.5	20175	20	16QAM	50	25	21.34	0-2	2
	1732.5	20175	20	16QAM	50	50	21.32	0-2	2
	1732.5	20175	20	16QAM	100	0	21.33	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset

Table 9-8
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	23.23	0	0
	1717.5	20025	15	QPSK	1	36	23.25	0	0
	1717.5	20025	15	QPSK	1	74	23.32	0	0
	1717.5	20025	15	QPSK	36	0	21.93	0-1	1
	1717.5	20025	15	QPSK	36	18	21.94	0-1	1
	1717.5	20025	15	QPSK	36	37	21.96	0-1	1
	1717.5	20025	15	QPSK	75	0	21.92	0-1	1
	1717.5	20025	15	16QAM	1	0	22.22	0-1	1
	1717.5	20025	15	16QAM	1	36	22.14	0-1	1
	1717.5	20025	15	16QAM	1	74	22.09	0-1	1
	1717.5	20025	15	16QAM	36	0	20.89	0-2	2
	1717.5	20025	15	16QAM	36	18	20.92	0-2	2
	1717.5	20025	15	16QAM	36	37	20.97	0-2	2
Mid	1732.5	20175	15	QPSK	1	0	23.43	0	0
	1732.5	20175	15	QPSK	1	36	23.46	0	0
	1732.5	20175	15	QPSK	1	74	23.44	0	0
	1732.5	20175	15	QPSK	36	0	22.14	0-1	1
	1732.5	20175	15	QPSK	36	18	22.15	0-1	1
	1732.5	20175	15	QPSK	36	37	22.15	0-1	1
	1732.5	20175	15	QPSK	75	0	22.15	0-1	1
	1732.5	20175	15	16QAM	1	0	22.37	0-1	1
	1732.5	20175	15	16QAM	1	36	22.46	0-1	1
	1732.5	20175	15	16QAM	1	74	22.45	0-1	1
	1732.5	20175	15	16QAM	36	0	21.09	0-2	2
	1732.5	20175	15	16QAM	36	18	21.12	0-2	2
	1732.5	20175	15	16QAM	36	37	21.10	0-2	2
	1732.5	20175	15	16QAM	75	0	21.13	0-2	2
High	1747.5	20325	15	QPSK	1	0	23.31	0	0
	1747.5	20325	15	QPSK	1	36	23.32	0	0
	1747.5	20325	15	QPSK	1	74	23.33	0	0
	1747.5	20325	15	QPSK	36	0	22.01	0-1	1
	1747.5	20325	15	QPSK	36	18	22.02	0-1	1
	1747.5	20325	15	QPSK	36	37	22.03	0-1	1
	1747.5	20325	15	QPSK	75	0	22.02	0-1	1
	1747.5	20325	15	16QAM	1	0	22.23	0-1	1
	1747.5	20325	15	16QAM	1	36	22.04	0-1	1
	1747.5	20325	15	16QAM	1	74	22.06	0-1	1
	1747.5	20325	15	16QAM	36	0	21.06	0-2	2
	1747.5	20325	15	16QAM	36	18	20.98	0-2	2
	1747.5	20325	15	16QAM	36	37	21.01	0-2	2
	1747.5	20325	15	16QAM	75	0	21.04	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 31 of 78		

Table 9-9
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	23.26	0	0
	1715	20000	10	QPSK	1	25	23.28	0	0
	1715	20000	10	QPSK	1	49	23.32	0	0
	1715	20000	10	QPSK	25	0	21.91	0-1	1
	1715	20000	10	QPSK	25	12	21.93	0-1	1
	1715	20000	10	QPSK	25	25	21.91	0-1	1
	1715	20000	10	QPSK	50	0	21.93	0-1	1
	1715	20000	10	16QAM	1	0	22.22	0-1	1
	1715	20000	10	16QAM	1	25	21.99	0-1	1
	1715	20000	10	16QAM	1	49	22.11	0-1	1
	1715	20000	10	16QAM	25	0	20.92	0-2	2
	1715	20000	10	16QAM	25	12	20.96	0-2	2
	1715	20000	10	16QAM	25	25	20.90	0-2	2
Mid	1732.5	20175	10	QPSK	1	0	23.45	0	0
	1732.5	20175	10	QPSK	1	25	23.46	0	0
	1732.5	20175	10	QPSK	1	49	23.50	0	0
	1732.5	20175	10	QPSK	25	0	22.14	0-1	1
	1732.5	20175	10	QPSK	25	12	22.15	0-1	1
	1732.5	20175	10	QPSK	25	25	22.14	0-1	1
	1732.5	20175	10	QPSK	50	0	22.15	0-1	1
	1732.5	20175	10	16QAM	1	0	22.37	0-1	1
	1732.5	20175	10	16QAM	1	25	22.46	0-1	1
	1732.5	20175	10	16QAM	1	49	22.45	0-1	1
	1732.5	20175	10	16QAM	25	0	21.13	0-2	2
	1732.5	20175	10	16QAM	25	12	21.12	0-2	2
	1732.5	20175	10	16QAM	25	25	21.10	0-2	2
	1732.5	20175	10	16QAM	50	0	21.13	0-2	2
High	1750	20350	10	QPSK	1	0	23.31	0	0
	1750	20350	10	QPSK	1	25	23.31	0	0
	1750	20350	10	QPSK	1	49	23.24	0	0
	1750	20350	10	QPSK	25	0	21.97	0-1	1
	1750	20350	10	QPSK	25	12	21.97	0-1	1
	1750	20350	10	QPSK	25	25	21.96	0-1	1
	1750	20350	10	QPSK	50	0	21.97	0-1	1
	1750	20350	10	16QAM	1	0	22.28	0-1	1
	1750	20350	10	16QAM	1	25	22.22	0-1	1
	1750	20350	10	16QAM	1	49	22.09	0-1	1
	1750	20350	10	16QAM	25	0	20.93	0-2	2
	1750	20350	10	16QAM	25	12	20.97	0-2	2
	1750	20350	10	16QAM	25	25	20.96	0-2	2
	1750	20350	10	16QAM	50	0	20.97	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 32 of 78		

Table 9-10
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	23.15	0	0
	1712.5	19975	5	QPSK	1	12	23.17	0	0
	1712.5	19975	5	QPSK	1	24	23.20	0	0
	1712.5	19975	5	QPSK	12	0	21.93	0-1	1
	1712.5	19975	5	QPSK	12	6	21.91	0-1	1
	1712.5	19975	5	QPSK	12	13	21.92	0-1	1
	1712.5	19975	5	QPSK	25	0	21.94	0-1	1
	1712.5	19975	5	16-QAM	1	0	22.05	0-1	1
	1712.5	19975	5	16-QAM	1	12	22.04	0-1	1
	1712.5	19975	5	16-QAM	1	24	22.22	0-1	1
	1712.5	19975	5	16-QAM	12	0	20.80	0-2	2
	1712.5	19975	5	16-QAM	12	6	20.83	0-2	2
	1712.5	19975	5	16-QAM	12	13	20.84	0-2	2
Mid	1732.5	20175	5	QPSK	1	0	23.38	0	0
	1732.5	20175	5	QPSK	1	12	23.17	0	0
	1732.5	20175	5	QPSK	1	24	23.32	0	0
	1732.5	20175	5	QPSK	12	0	22.13	0-1	1
	1732.5	20175	5	QPSK	12	6	22.14	0-1	1
	1732.5	20175	5	QPSK	12	13	22.13	0-1	1
	1732.5	20175	5	QPSK	25	0	22.12	0-1	1
	1732.5	20175	5	16-QAM	1	0	22.38	0-1	1
	1732.5	20175	5	16-QAM	1	12	22.39	0-1	1
	1732.5	20175	5	16-QAM	1	24	22.36	0-1	1
	1732.5	20175	5	16-QAM	12	0	20.99	0-2	2
	1732.5	20175	5	16-QAM	12	6	20.98	0-2	2
	1732.5	20175	5	16-QAM	12	13	20.98	0-2	2
	1732.5	20175	5	16-QAM	25	0	21.18	0-2	2
High	1752.5	20375	5	QPSK	1	0	23.31	0	0
	1752.5	20375	5	QPSK	1	12	23.22	0	0
	1752.5	20375	5	QPSK	1	24	23.34	0	0
	1752.5	20375	5	QPSK	12	0	22.03	0-1	1
	1752.5	20375	5	QPSK	12	6	22.05	0-1	1
	1752.5	20375	5	QPSK	12	13	22.06	0-1	1
	1752.5	20375	5	QPSK	25	0	22.05	0-1	1
	1752.5	20375	5	16-QAM	1	0	22.30	0-1	1
	1752.5	20375	5	16-QAM	1	12	22.05	0-1	1
	1752.5	20375	5	16-QAM	1	24	22.23	0-1	1
	1752.5	20375	5	16-QAM	12	0	20.93	0-2	2
	1752.5	20375	5	16-QAM	12	6	20.95	0-2	2
	1752.5	20375	5	16-QAM	12	13	20.94	0-2	2
	1752.5	20375	5	16-QAM	25	0	21.10	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 33 of 78		

Table 9-11
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	23.34	0	0
	1711.5	19965	3	QPSK	1	7	23.32	0	0
	1711.5	19965	3	QPSK	1	14	23.35	0	0
	1711.5	19965	3	QPSK	8	0	21.92	0-1	1
	1711.5	19965	3	QPSK	8	4	21.91	0-1	1
	1711.5	19965	3	QPSK	8	7	21.93	0-1	1
	1711.5	19965	3	QPSK	15	0	21.96	0-1	1
	1711.5	19965	3	16-QAM	1	0	22.20	0-1	1
	1711.5	19965	3	16-QAM	1	7	21.95	0-1	1
	1711.5	19965	3	16-QAM	1	14	22.18	0-1	1
	1711.5	19965	3	16-QAM	8	0	20.88	0-2	2
	1711.5	19965	3	16-QAM	8	4	20.91	0-2	2
Mid	1711.5	19965	3	16-QAM	8	7	20.83	0-2	2
	1711.5	19965	3	16-QAM	15	0	20.90	0-2	2
	1732.5	20175	3	QPSK	1	0	23.48	0	0
	1732.5	20175	3	QPSK	1	7	23.41	0	0
	1732.5	20175	3	QPSK	1	14	23.44	0	0
	1732.5	20175	3	QPSK	8	0	22.12	0-1	1
	1732.5	20175	3	QPSK	8	4	22.12	0-1	1
	1732.5	20175	3	QPSK	8	7	22.11	0-1	1
	1732.5	20175	3	QPSK	15	0	22.17	0-1	1
	1732.5	20175	3	16-QAM	1	0	22.46	0-1	1
	1732.5	20175	3	16-QAM	1	7	22.39	0-1	1
	1732.5	20175	3	16-QAM	1	14	22.42	0-1	1
High	1732.5	20175	3	16-QAM	8	0	21.10	0-2	2
	1732.5	20175	3	16-QAM	8	4	21.18	0-2	2
	1732.5	20175	3	16-QAM	8	7	21.08	0-2	2
	1732.5	20175	3	16-QAM	15	0	21.13	0-2	2
	1753.5	20385	3	QPSK	1	0	23.44	0	0
	1753.5	20385	3	QPSK	1	7	23.39	0	0
	1753.5	20385	3	QPSK	1	14	23.43	0	0
	1753.5	20385	3	QPSK	8	0	22.02	0-1	1
	1753.5	20385	3	QPSK	8	4	22.00	0-1	1
	1753.5	20385	3	QPSK	8	7	22.00	0-1	1
	1753.5	20385	3	QPSK	15	0	22.07	0-1	1
	1753.5	20385	3	16-QAM	1	0	22.21	0-1	1
	1753.5	20385	3	16-QAM	1	7	22.37	0-1	1
	1753.5	20385	3	16-QAM	1	14	22.31	0-1	1
	1753.5	20385	3	16-QAM	8	0	21.02	0-2	2
	1753.5	20385	3	16-QAM	8	4	20.91	0-2	2
	1753.5	20385	3	16-QAM	8	7	21.01	0-2	2
	1753.5	20385	3	16-QAM	15	0	20.98	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 34 of 78		

Table 9-12
LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	23.03	0	0
	1710.7	19957	1.4	QPSK	1	2	23.11	0	0
	1710.7	19957	1.4	QPSK	1	5	23.13	0	0
	1710.7	19957	1.4	QPSK	3	0	22.89	0	0
	1710.7	19957	1.4	QPSK	3	2	22.91	0	0
	1710.7	19957	1.4	QPSK	3	3	22.92	0	0
	1710.7	19957	1.4	QPSK	6	0	21.92	0-1	1
	1710.7	19957	1.4	16-QAM	1	0	21.99	0-1	1
	1710.7	19957	1.4	16-QAM	1	2	22.10	0-1	1
	1710.7	19957	1.4	16-QAM	1	5	21.95	0-1	1
	1710.7	19957	1.4	16-QAM	3	0	21.90	0-1	1
	1710.7	19957	1.4	16-QAM	3	2	21.90	0-1	1
	1710.7	19957	1.4	16-QAM	3	3	21.85	0-1	1
Mid	1732.5	20175	1.4	QPSK	1	0	23.23	0	0
	1732.5	20175	1.4	QPSK	1	2	23.33	0	0
	1732.5	20175	1.4	QPSK	1	5	23.29	0	0
	1732.5	20175	1.4	QPSK	3	0	23.08	0	0
	1732.5	20175	1.4	QPSK	3	2	23.12	0	0
	1732.5	20175	1.4	QPSK	3	3	23.10	0	0
	1732.5	20175	1.4	QPSK	6	0	22.12	0-1	1
	1732.5	20175	1.4	16-QAM	1	0	22.19	0-1	1
	1732.5	20175	1.4	16-QAM	1	2	22.27	0-1	1
	1732.5	20175	1.4	16-QAM	1	5	22.26	0-1	1
	1732.5	20175	1.4	16-QAM	3	0	22.19	0-1	1
	1732.5	20175	1.4	16-QAM	3	2	22.24	0-1	1
	1732.5	20175	1.4	16-QAM	3	3	22.18	0-1	1
	1732.5	20175	1.4	16-QAM	6	0	21.26	0-2	2
High	1754.3	20393	1.4	QPSK	1	0	23.34	0	0
	1754.3	20393	1.4	QPSK	1	2	23.25	0	0
	1754.3	20393	1.4	QPSK	1	5	23.24	0	0
	1754.3	20393	1.4	QPSK	3	0	22.98	0	0
	1754.3	20393	1.4	QPSK	3	2	23.02	0	0
	1754.3	20393	1.4	QPSK	3	3	23.01	0	0
	1754.3	20393	1.4	QPSK	6	0	22.02	0-1	1
	1754.3	20393	1.4	16-QAM	1	0	22.07	0-1	1
	1754.3	20393	1.4	16-QAM	1	2	22.32	0-1	1
	1754.3	20393	1.4	16-QAM	1	5	22.08	0-1	1
	1754.3	20393	1.4	16-QAM	3	0	22.06	0-1	1
	1754.3	20393	1.4	16-QAM	3	2	22.06	0-1	1
	1754.3	20393	1.4	16-QAM	3	3	22.11	0-1	1
	1754.3	20393	1.4	16-QAM	6	0	21.06	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 35 of 78		

Table 9-13
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	20.31	0	0
	1732.5	20175	20	QPSK	1	50	20.29	0	0
	1732.5	20175	20	QPSK	1	99	20.33	0	0
	1732.5	20175	20	QPSK	50	0	20.47	0-1	0
	1732.5	20175	20	QPSK	50	25	20.50	0-1	0
	1732.5	20175	20	QPSK	50	50	20.49	0-1	0
	1732.5	20175	20	QPSK	100	0	20.32	0-1	0
	1732.5	20175	20	16QAM	1	0	20.39	0-1	0
	1732.5	20175	20	16QAM	1	50	20.41	0-1	0
	1732.5	20175	20	16QAM	1	99	20.39	0-1	0
	1732.5	20175	20	16QAM	50	0	20.42	0-2	0
	1732.5	20175	20	16QAM	50	25	20.45	0-2	0
	1732.5	20175	20	16QAM	50	50	20.44	0-2	0
	1732.5	20175	20	16QAM	100	0	20.49	0-2	0

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset

Table 9-14
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	20.17	0	0
	1717.5	20025	15	QPSK	1	36	20.29	0	0
	1717.5	20025	15	QPSK	1	74	20.16	0	0
	1717.5	20025	15	QPSK	36	0	20.21	0-1	0
	1717.5	20025	15	QPSK	36	18	20.21	0-1	0
	1717.5	20025	15	QPSK	36	37	20.18	0-1	0
	1717.5	20025	15	QPSK	75	0	20.10	0-1	0
	1717.5	20025	15	16QAM	1	0	20.13	0-1	0
	1717.5	20025	15	16QAM	1	36	20.12	0-1	0
	1717.5	20025	15	16QAM	1	74	20.11	0-1	0
	1717.5	20025	15	16QAM	36	0	20.15	0-2	0
	1717.5	20025	15	16QAM	36	18	20.22	0-2	0
Mid	1717.5	20025	15	16QAM	36	37	20.18	0-2	0
	1717.5	20025	15	16QAM	75	0	20.22	0-2	0
	1732.5	20175	15	QPSK	1	0	20.43	0	0
	1732.5	20175	15	QPSK	1	36	20.50	0	0
	1732.5	20175	15	QPSK	1	74	20.41	0	0
	1732.5	20175	15	QPSK	36	0	20.38	0-1	0
	1732.5	20175	15	QPSK	36	18	20.39	0-1	0
	1732.5	20175	15	QPSK	36	37	20.41	0-1	0
	1732.5	20175	15	QPSK	75	0	20.37	0-1	0
	1732.5	20175	15	16QAM	1	0	20.21	0-1	0
	1732.5	20175	15	16QAM	1	36	20.20	0-1	0
	1732.5	20175	15	16QAM	1	74	20.15	0-1	0
High	1732.5	20175	15	16QAM	36	0	20.31	0-2	0
	1732.5	20175	15	16QAM	36	18	20.32	0-2	0
	1732.5	20175	15	16QAM	36	37	20.28	0-2	0
	1732.5	20175	15	16QAM	75	0	20.29	0-2	0
	1747.5	20325	15	QPSK	1	0	20.22	0	0
	1747.5	20325	15	QPSK	1	36	20.20	0	0
	1747.5	20325	15	QPSK	1	74	20.17	0	0
	1747.5	20325	15	QPSK	36	0	20.33	0-1	0
	1747.5	20325	15	QPSK	36	18	20.31	0-1	0
	1747.5	20325	15	QPSK	36	37	20.29	0-1	0
	1747.5	20325	15	QPSK	75	0	20.30	0-1	0
	1747.5	20325	15	16QAM	1	0	20.23	0-1	0
	1747.5	20325	15	16QAM	1	36	20.18	0-1	0
	1747.5	20325	15	16QAM	1	74	20.14	0-1	0
	1747.5	20325	15	16QAM	36	0	20.31	0-2	0
	1747.5	20325	15	16QAM	36	18	20.32	0-2	0
	1747.5	20325	15	16QAM	36	37	20.25	0-2	0
	1747.5	20325	15	16QAM	75	0	20.29	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 37 of 78		

Table 9-15
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	20.10	0	0
	1715	20000	10	QPSK	1	25	20.14	0	0
	1715	20000	10	QPSK	1	49	20.12	0	0
	1715	20000	10	QPSK	25	0	20.24	0-1	0
	1715	20000	10	QPSK	25	12	20.28	0-1	0
	1715	20000	10	QPSK	25	25	20.20	0-1	0
	1715	20000	10	QPSK	50	0	20.28	0-1	0
	1715	20000	10	16QAM	1	0	20.16	0-1	0
	1715	20000	10	16QAM	1	25	20.17	0-1	0
	1715	20000	10	16QAM	1	49	20.20	0-1	0
	1715	20000	10	16QAM	25	0	20.23	0-2	0
	1715	20000	10	16QAM	25	12	20.32	0-2	0
	1715	20000	10	16QAM	25	25	20.23	0-2	0
Mid	1732.5	20175	10	QPSK	1	0	20.42	0	0
	1732.5	20175	10	QPSK	1	25	20.46	0	0
	1732.5	20175	10	QPSK	1	49	20.43	0	0
	1732.5	20175	10	QPSK	25	0	20.36	0-1	0
	1732.5	20175	10	QPSK	25	12	20.34	0-1	0
	1732.5	20175	10	QPSK	25	25	20.40	0-1	0
	1732.5	20175	10	QPSK	50	0	20.32	0-1	0
	1732.5	20175	10	16QAM	1	0	20.13	0-1	0
	1732.5	20175	10	16QAM	1	25	20.06	0-1	0
	1732.5	20175	10	16QAM	1	49	20.10	0-1	0
	1732.5	20175	10	16QAM	25	0	20.31	0-2	0
	1732.5	20175	10	16QAM	25	12	20.39	0-2	0
	1732.5	20175	10	16QAM	25	25	20.39	0-2	0
	1732.5	20175	10	16QAM	50	0	20.44	0-2	0
High	1750	20350	10	QPSK	1	0	20.28	0	0
	1750	20350	10	QPSK	1	25	20.23	0	0
	1750	20350	10	QPSK	1	49	20.24	0	0
	1750	20350	10	QPSK	25	0	20.33	0-1	0
	1750	20350	10	QPSK	25	12	20.26	0-1	0
	1750	20350	10	QPSK	25	25	20.26	0-1	0
	1750	20350	10	QPSK	50	0	20.25	0-1	0
	1750	20350	10	16QAM	1	0	20.06	0-1	0
	1750	20350	10	16QAM	1	25	20.01	0-1	0
	1750	20350	10	16QAM	1	49	20.07	0-1	0
	1750	20350	10	16QAM	25	0	20.27	0-2	0
	1750	20350	10	16QAM	25	12	20.31	0-2	0
	1750	20350	10	16QAM	25	25	20.29	0-2	0
	1750	20350	10	16QAM	50	0	20.25	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset

Table 9-16
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	20.17	0	0
	1712.5	19975	5	QPSK	1	12	20.16	0	0
	1712.5	19975	5	QPSK	1	24	20.24	0	0
	1712.5	19975	5	QPSK	12	0	20.18	0-1	0
	1712.5	19975	5	QPSK	12	6	20.19	0-1	0
	1712.5	19975	5	QPSK	12	13	20.18	0-1	0
	1712.5	19975	5	QPSK	25	0	20.19	0-1	0
	1712.5	19975	5	16-QAM	1	0	20.05	0-1	0
	1712.5	19975	5	16-QAM	1	12	20.06	0-1	0
	1712.5	19975	5	16-QAM	1	24	20.15	0-1	0
	1712.5	19975	5	16-QAM	12	0	20.09	0-2	0
	1712.5	19975	5	16-QAM	12	6	20.17	0-2	0
Mid	1712.5	19975	5	16-QAM	12	13	20.15	0-2	0
	1732.5	20175	5	QPSK	1	0	20.34	0	0
	1732.5	20175	5	QPSK	1	12	20.35	0	0
	1732.5	20175	5	QPSK	1	24	20.43	0	0
	1732.5	20175	5	QPSK	12	0	20.33	0-1	0
	1732.5	20175	5	QPSK	12	6	20.31	0-1	0
	1732.5	20175	5	QPSK	12	13	20.38	0-1	0
	1732.5	20175	5	QPSK	25	0	20.35	0-1	0
	1732.5	20175	5	16-QAM	1	0	20.21	0-1	0
	1732.5	20175	5	16-QAM	1	12	20.14	0-1	0
	1732.5	20175	5	16-QAM	1	24	20.16	0-1	0
	1732.5	20175	5	16-QAM	12	0	20.30	0-2	0
High	1732.5	20175	5	16-QAM	12	6	20.28	0-2	0
	1732.5	20175	5	16-QAM	12	13	20.24	0-2	0
	1732.5	20175	5	16-QAM	25	0	20.35	0-2	0
	1752.5	20375	5	QPSK	1	0	20.13	0	0
	1752.5	20375	5	QPSK	1	12	20.17	0	0
	1752.5	20375	5	QPSK	1	24	20.24	0	0
	1752.5	20375	5	QPSK	12	0	20.34	0-1	0
	1752.5	20375	5	QPSK	12	6	20.29	0-1	0
	1752.5	20375	5	QPSK	12	13	20.33	0-1	0
	1752.5	20375	5	QPSK	25	0	20.32	0-1	0
	1752.5	20375	5	16-QAM	1	0	20.09	0-1	0
	1752.5	20375	5	16-QAM	1	12	20.03	0-1	0
	1752.5	20375	5	16-QAM	1	24	20.10	0-1	0
	1752.5	20375	5	16-QAM	12	0	20.28	0-2	0
	1752.5	20375	5	16-QAM	12	6	20.25	0-2	0
	1752.5	20375	5	16-QAM	12	13	20.27	0-2	0
	1752.5	20375	5	16-QAM	25	0	20.35	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 39 of 78		

Table 9-17
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	20.31	0	0
	1711.5	19965	3	QPSK	1	7	20.36	0	0
	1711.5	19965	3	QPSK	1	14	20.37	0	0
	1711.5	19965	3	QPSK	8	0	20.17	0-1	0
	1711.5	19965	3	QPSK	8	4	20.22	0-1	0
	1711.5	19965	3	QPSK	8	7	20.23	0-1	0
	1711.5	19965	3	QPSK	15	0	20.23	0-1	0
	1711.5	19965	3	16-QAM	1	0	20.13	0-1	0
	1711.5	19965	3	16-QAM	1	7	20.11	0-1	0
	1711.5	19965	3	16-QAM	1	14	20.16	0-1	0
	1711.5	19965	3	16-QAM	8	0	20.09	0-2	0
	1711.5	19965	3	16-QAM	8	4	20.06	0-2	0
Mid	1711.5	19965	3	16-QAM	8	7	20.06	0-2	0
	1711.5	19965	3	16-QAM	15	0	20.12	0-2	0
	1732.5	20175	3	QPSK	1	0	20.48	0	0
	1732.5	20175	3	QPSK	1	7	20.46	0	0
	1732.5	20175	3	QPSK	1	14	20.49	0	0
	1732.5	20175	3	QPSK	8	0	20.40	0-1	0
	1732.5	20175	3	QPSK	8	4	20.36	0-1	0
	1732.5	20175	3	QPSK	8	7	20.40	0-1	0
	1732.5	20175	3	QPSK	15	0	20.39	0-1	0
	1732.5	20175	3	16-QAM	1	0	20.32	0-1	0
	1732.5	20175	3	16-QAM	1	7	20.31	0-1	0
	1732.5	20175	3	16-QAM	1	14	20.25	0-1	0
High	1732.5	20175	3	16-QAM	8	0	20.32	0-2	0
	1732.5	20175	3	16-QAM	8	4	20.28	0-2	0
	1732.5	20175	3	16-QAM	8	7	20.32	0-2	0
	1732.5	20175	3	16-QAM	15	0	20.30	0-2	0
	1753.5	20385	3	QPSK	1	0	20.40	0	0
	1753.5	20385	3	QPSK	1	7	20.36	0	0
	1753.5	20385	3	QPSK	1	14	20.37	0	0
	1753.5	20385	3	QPSK	8	0	20.28	0-1	0
	1753.5	20385	3	QPSK	8	4	20.24	0-1	0
	1753.5	20385	3	QPSK	8	7	20.29	0-1	0
	1753.5	20385	3	QPSK	15	0	20.27	0-1	0
	1753.5	20385	3	16-QAM	1	0	20.20	0-1	0
	1753.5	20385	3	16-QAM	1	7	20.09	0-1	0
	1753.5	20385	3	16-QAM	1	14	20.14	0-1	0
	1753.5	20385	3	16-QAM	8	0	20.07	0-2	0
	1753.5	20385	3	16-QAM	8	4	20.03	0-2	0
	1753.5	20385	3	16-QAM	8	7	20.05	0-2	0
	1753.5	20385	3	16-QAM	15	0	20.21	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 40 of 78		

Table 9-18
LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	20.16	0	0
	1710.7	19957	1.4	QPSK	1	2	20.18	0	0
	1710.7	19957	1.4	QPSK	1	5	20.23	0	0
	1710.7	19957	1.4	QPSK	3	0	20.09	0	0
	1710.7	19957	1.4	QPSK	3	2	20.18	0	0
	1710.7	19957	1.4	QPSK	3	3	20.19	0	0
	1710.7	19957	1.4	QPSK	6	0	20.17	0-1	0
	1710.7	19957	1.4	16-QAM	1	0	20.15	0-1	0
	1710.7	19957	1.4	16-QAM	1	2	20.18	0-1	0
	1710.7	19957	1.4	16-QAM	1	5	20.22	0-1	0
	1710.7	19957	1.4	16-QAM	3	0	20.05	0-1	0
	1710.7	19957	1.4	16-QAM	3	2	20.14	0-1	0
	1710.7	19957	1.4	16-QAM	3	3	20.06	0-1	0
Mid	1710.7	19957	1.4	16-QAM	6	0	20.02	0-2	0
	1732.5	20175	1.4	QPSK	1	0	20.35	0	0
	1732.5	20175	1.4	QPSK	1	2	20.29	0	0
	1732.5	20175	1.4	QPSK	1	5	20.32	0	0
	1732.5	20175	1.4	QPSK	3	0	20.30	0	0
	1732.5	20175	1.4	QPSK	3	2	20.34	0	0
	1732.5	20175	1.4	QPSK	3	3	20.31	0	0
	1732.5	20175	1.4	QPSK	6	0	20.29	0-1	0
	1732.5	20175	1.4	16-QAM	1	0	20.29	0-1	0
	1732.5	20175	1.4	16-QAM	1	2	20.30	0-1	0
	1732.5	20175	1.4	16-QAM	1	5	20.34	0-1	0
	1732.5	20175	1.4	16-QAM	3	0	20.36	0-1	0
	1732.5	20175	1.4	16-QAM	3	2	20.37	0-1	0
High	1732.5	20175	1.4	16-QAM	3	3	20.35	0-1	0
	1732.5	20175	1.4	16-QAM	6	0	20.33	0-2	0
	1754.3	20393	1.4	QPSK	1	0	20.27	0	0
	1754.3	20393	1.4	QPSK	1	2	20.25	0	0
	1754.3	20393	1.4	QPSK	1	5	20.25	0	0
	1754.3	20393	1.4	QPSK	3	0	20.12	0	0
	1754.3	20393	1.4	QPSK	3	2	20.16	0	0
	1754.3	20393	1.4	QPSK	3	3	20.13	0	0
	1754.3	20393	1.4	QPSK	6	0	20.15	0-1	0
	1754.3	20393	1.4	16-QAM	1	0	20.09	0-1	0
	1754.3	20393	1.4	16-QAM	1	2	20.06	0-1	0
	1754.3	20393	1.4	16-QAM	1	5	20.09	0-1	0
	1754.3	20393	1.4	16-QAM	3	0	20.12	0-1	0
	1754.3	20393	1.4	16-QAM	3	2	20.16	0-1	0
	1754.3	20393	1.4	16-QAM	3	3	20.12	0-1	0
	1754.3	20393	1.4	16-QAM	6	0	20.19	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 41 of 78		

9.3.4

LTE Band 2 (PCS)

Table 9-19
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	22.55	0	0
	1860	18700	20	QPSK	1	50	22.53	0	0
	1860	18700	20	QPSK	1	99	22.55	0	0
	1860	18700	20	QPSK	50	0	21.77	0-1	1
	1860	18700	20	QPSK	50	25	21.78	0-1	1
	1860	18700	20	QPSK	50	50	21.69	0-1	1
	1860	18700	20	QPSK	100	0	21.68	0-1	1
	1860	18700	20	16QAM	1	0	21.69	0-1	1
	1860	18700	20	16QAM	1	50	21.68	0-1	1
	1860	18700	20	16QAM	1	99	21.67	0-1	1
	1860	18700	20	16QAM	50	0	20.59	0-2	2
	1860	18700	20	16QAM	50	25	20.62	0-2	2
	1860	18700	20	16QAM	50	50	20.70	0-2	2
	1860	18700	20	16QAM	100	0	20.65	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	22.65	0	0
	1880.0	18900	20	QPSK	1	50	22.64	0	0
	1880.0	18900	20	QPSK	1	99	22.59	0	0
	1880.0	18900	20	QPSK	50	0	21.56	0-1	1
	1880.0	18900	20	QPSK	50	25	21.61	0-1	1
	1880.0	18900	20	QPSK	50	50	21.61	0-1	1
	1880.0	18900	20	QPSK	100	0	21.55	0-1	1
	1880.0	18900	20	16QAM	1	0	21.53	0-1	1
	1880.0	18900	20	16QAM	1	50	21.52	0-1	1
	1880.0	18900	20	16QAM	1	99	21.57	0-1	1
	1880.0	18900	20	16QAM	50	0	20.50	0-2	2
	1880.0	18900	20	16QAM	50	25	20.51	0-2	2
	1880.0	18900	20	16QAM	50	50	20.52	0-2	2
	1880.0	18900	20	16QAM	100	0	20.56	0-2	2
High	1900	19100	20	QPSK	1	0	22.54	0	0
	1900	19100	20	QPSK	1	50	22.56	0	0
	1900	19100	20	QPSK	1	99	22.51	0	0
	1900	19100	20	QPSK	50	0	21.59	0-1	1
	1900	19100	20	QPSK	50	25	21.52	0-1	1
	1900	19100	20	QPSK	50	50	21.62	0-1	1
	1900	19100	20	QPSK	100	0	21.48	0-1	1
	1900	19100	20	16QAM	1	0	21.49	0-1	1
	1900	19100	20	16QAM	1	50	21.40	0-1	1
	1900	19100	20	16QAM	1	99	21.43	0-1	1
	1900	19100	20	16QAM	50	0	20.47	0-2	2
	1900	19100	20	16QAM	50	25	20.42	0-2	2
	1900	19100	20	16QAM	50	50	20.49	0-2	2
	1900	19100	20	16QAM	100	0	20.53	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 42 of 78

Table 9-20
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	22.73	0	0
	1857.5	18675	15	QPSK	1	36	22.72	0	0
	1857.5	18675	15	QPSK	1	74	22.78	0	0
	1857.5	18675	15	QPSK	36	0	21.38	0-1	1
	1857.5	18675	15	QPSK	36	18	21.41	0-1	1
	1857.5	18675	15	QPSK	36	37	21.41	0-1	1
	1857.5	18675	15	QPSK	75	0	21.41	0-1	1
	1857.5	18675	15	16QAM	1	0	21.43	0-1	1
	1857.5	18675	15	16QAM	1	36	21.48	0-1	1
	1857.5	18675	15	16QAM	1	74	21.47	0-1	1
	1857.5	18675	15	16QAM	36	0	20.38	0-2	2
	1857.5	18675	15	16QAM	36	18	20.37	0-2	2
Mid	1857.5	18675	15	16QAM	36	37	20.37	0-2	2
	1857.5	18675	15	16QAM	75	0	20.42	0-2	2
	1880.0	18900	15	QPSK	1	0	22.75	0	0
	1880.0	18900	15	QPSK	1	36	22.72	0	0
	1880.0	18900	15	QPSK	1	74	22.85	0	0
	1880.0	18900	15	QPSK	36	0	21.38	0-1	1
	1880.0	18900	15	QPSK	36	18	21.42	0-1	1
	1880.0	18900	15	QPSK	36	37	21.44	0-1	1
	1880.0	18900	15	QPSK	75	0	21.43	0-1	1
	1880.0	18900	15	16QAM	1	0	21.52	0-1	1
	1880.0	18900	15	16QAM	1	36	21.48	0-1	1
	1880.0	18900	15	16QAM	1	74	21.68	0-1	1
High	1880.0	18900	15	16QAM	36	0	20.38	0-2	2
	1880.0	18900	15	16QAM	36	18	20.39	0-2	2
	1880.0	18900	15	16QAM	36	37	20.39	0-2	2
	1880.0	18900	15	16QAM	75	0	20.43	0-2	2
	1902.5	19125	15	QPSK	1	0	22.70	0	0
	1902.5	19125	15	QPSK	1	36	22.75	0	0
	1902.5	19125	15	QPSK	1	74	22.84	0	0
	1902.5	19125	15	QPSK	36	0	21.40	0-1	1
	1902.5	19125	15	QPSK	36	18	21.44	0-1	1
	1902.5	19125	15	QPSK	36	37	21.45	0-1	1
	1902.5	19125	15	QPSK	75	0	21.45	0-1	1
	1902.5	19125	15	16QAM	1	0	21.51	0-1	1
	1902.5	19125	15	16QAM	1	36	21.35	0-1	1
	1902.5	19125	15	16QAM	1	74	21.50	0-1	1
	1902.5	19125	15	16QAM	36	0	20.36	0-2	2
	1902.5	19125	15	16QAM	36	18	20.39	0-2	2
	1902.5	19125	15	16QAM	36	37	20.40	0-2	2
	1902.5	19125	15	16QAM	75	0	20.44	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 43 of 78		

Table 9-21
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	22.74	0	0
	1855	18650	10	QPSK	1	25	22.72	0	0
	1855	18650	10	QPSK	1	49	22.78	0	0
	1855	18650	10	QPSK	25	0	21.39	0-1	1
	1855	18650	10	QPSK	25	12	21.41	0-1	1
	1855	18650	10	QPSK	25	25	21.41	0-1	1
	1855	18650	10	QPSK	50	0	21.43	0-1	1
	1855	18650	10	16QAM	1	0	21.63	0-1	1
	1855	18650	10	16QAM	1	25	21.64	0-1	1
	1855	18650	10	16QAM	1	49	21.69	0-1	1
	1855	18650	10	16QAM	25	0	20.33	0-2	2
	1855	18650	10	16QAM	25	12	20.37	0-2	2
Mid	1855	18650	10	16QAM	25	25	20.41	0-2	2
	1855	18650	10	16QAM	50	0	20.42	0-2	2
	1880.0	18900	10	QPSK	1	0	22.75	0	0
	1880.0	18900	10	QPSK	1	25	22.72	0	0
	1880.0	18900	10	QPSK	1	49	22.85	0	0
	1880.0	18900	10	QPSK	25	0	21.40	0-1	1
	1880.0	18900	10	QPSK	25	12	21.41	0-1	1
	1880.0	18900	10	QPSK	25	25	21.43	0-1	1
	1880.0	18900	10	QPSK	50	0	21.44	0-1	1
	1880.0	18900	10	16QAM	1	0	21.52	0-1	1
	1880.0	18900	10	16QAM	1	25	21.55	0-1	1
	1880.0	18900	10	16QAM	1	49	21.69	0-1	1
High	1880.0	18900	10	16QAM	25	0	20.38	0-2	2
	1880.0	18900	10	16QAM	25	12	20.38	0-2	2
	1880.0	18900	10	16QAM	25	25	20.42	0-2	2
	1880.0	18900	10	16QAM	50	0	20.45	0-2	2
	1905	19150	10	QPSK	1	0	22.78	0	0
	1905	19150	10	QPSK	1	25	22.82	0	0
	1905	19150	10	QPSK	1	49	22.90	0	0
	1905	19150	10	QPSK	25	0	21.41	0-1	1
	1905	19150	10	QPSK	25	12	21.45	0-1	1
	1905	19150	10	QPSK	25	25	21.45	0-1	1
	1905	19150	10	QPSK	50	0	21.46	0-1	1
	1905	19150	10	16QAM	1	0	21.56	0-1	1
	1905	19150	10	16QAM	1	25	21.71	0-1	1
	1905	19150	10	16QAM	1	49	21.55	0-1	1
	1905	19150	10	16QAM	25	0	20.39	0-2	2
	1905	19150	10	16QAM	25	12	20.39	0-2	2
	1905	19150	10	16QAM	25	25	20.44	0-2	2
	1905	19150	10	16QAM	50	0	20.44	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 44 of 78		

Table 9-22
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	22.51	0	0
	1852.5	18625	5	QPSK	1	12	22.56	0	0
	1852.5	18625	5	QPSK	1	24	22.48	0	0
	1852.5	18625	5	QPSK	12	0	21.39	0-1	1
	1852.5	18625	5	QPSK	12	6	21.39	0-1	1
	1852.5	18625	5	QPSK	12	13	21.40	0-1	1
	1852.5	18625	5	QPSK	25	0	21.43	0-1	1
	1852.5	18625	5	16-QAM	1	0	21.56	0-1	1
	1852.5	18625	5	16-QAM	1	12	21.51	0-1	1
	1852.5	18625	5	16-QAM	1	24	21.67	0-1	1
	1852.5	18625	5	16-QAM	12	0	20.24	0-2	2
	1852.5	18625	5	16-QAM	12	6	20.26	0-2	2
Mid	1852.5	18625	5	16-QAM	12	13	20.24	0-2	2
	1852.5	18625	5	16-QAM	25	0	20.50	0-2	2
	1880.0	18900	5	QPSK	1	0	22.58	0	0
	1880.0	18900	5	QPSK	1	12	22.48	0	0
	1880.0	18900	5	QPSK	1	24	22.60	0	0
	1880.0	18900	5	QPSK	12	0	21.43	0-1	1
	1880.0	18900	5	QPSK	12	6	21.42	0-1	1
	1880.0	18900	5	QPSK	12	13	21.43	0-1	1
	1880.0	18900	5	QPSK	25	0	21.44	0-1	1
	1880.0	18900	5	16-QAM	1	0	21.51	0-1	1
	1880.0	18900	5	16-QAM	1	12	21.44	0-1	1
	1880.0	18900	5	16-QAM	1	24	21.44	0-1	1
High	1880.0	18900	5	16-QAM	12	0	20.27	0-2	2
	1880.0	18900	5	16-QAM	12	6	20.30	0-2	2
	1880.0	18900	5	16-QAM	12	13	20.35	0-2	2
	1880.0	18900	5	16-QAM	25	0	20.49	0-2	2
	1907.5	19175	5	QPSK	1	0	22.66	0	0
	1907.5	19175	5	QPSK	1	12	22.66	0	0
	1907.5	19175	5	QPSK	1	24	22.75	0	0
	1907.5	19175	5	QPSK	12	0	21.50	0-1	1
	1907.5	19175	5	QPSK	12	6	21.53	0-1	1
	1907.5	19175	5	QPSK	12	13	21.56	0-1	1
	1907.5	19175	5	QPSK	25	0	21.54	0-1	1
	1907.5	19175	5	16-QAM	1	0	21.48	0-1	1
	1907.5	19175	5	16-QAM	1	12	21.44	0-1	1
	1907.5	19175	5	16-QAM	1	24	21.63	0-1	1
	1907.5	19175	5	16-QAM	12	0	20.37	0-2	2
	1907.5	19175	5	16-QAM	12	6	20.37	0-2	2
	1907.5	19175	5	16-QAM	12	13	20.41	0-2	2
	1907.5	19175	5	16-QAM	25	0	20.59	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 45 of 78		

Table 9-23
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	22.80	0	0
	1851.5	18615	3	QPSK	1	7	22.75	0	0
	1851.5	18615	3	QPSK	1	14	22.84	0	0
	1851.5	18615	3	QPSK	8	0	21.33	0-1	1
	1851.5	18615	3	QPSK	8	4	21.32	0-1	1
	1851.5	18615	3	QPSK	8	7	21.35	0-1	1
	1851.5	18615	3	QPSK	15	0	21.39	0-1	1
	1851.5	18615	3	16-QAM	1	0	21.61	0-1	1
	1851.5	18615	3	16-QAM	1	7	21.59	0-1	1
	1851.5	18615	3	16-QAM	1	14	21.69	0-1	1
	1851.5	18615	3	16-QAM	8	0	20.28	0-2	2
	1851.5	18615	3	16-QAM	8	4	20.34	0-2	2
Mid	1851.5	18615	3	16-QAM	8	7	20.37	0-2	2
	1851.5	18615	3	16-QAM	15	0	20.36	0-2	2
	1880.0	18900	3	QPSK	1	0	22.88	0	0
	1880.0	18900	3	QPSK	1	7	22.85	0	0
	1880.0	18900	3	QPSK	1	14	22.92	0	0
	1880.0	18900	3	QPSK	8	0	21.43	0-1	1
	1880.0	18900	3	QPSK	8	4	21.42	0-1	1
	1880.0	18900	3	QPSK	8	7	21.42	0-1	1
	1880.0	18900	3	QPSK	15	0	21.46	0-1	1
	1880.0	18900	3	16-QAM	1	0	21.64	0-1	1
	1880.0	18900	3	16-QAM	1	7	21.67	0-1	1
	1880.0	18900	3	16-QAM	1	14	21.55	0-1	1
High	1880.0	18900	3	16-QAM	8	0	20.37	0-2	2
	1880.0	18900	3	16-QAM	8	4	20.37	0-2	2
	1880.0	18900	3	16-QAM	8	7	20.46	0-2	2
	1880.0	18900	3	16-QAM	15	0	20.41	0-2	2
	1908.5	19185	3	QPSK	1	0	22.98	0	0
	1908.5	19185	3	QPSK	1	7	22.92	0	0
	1908.5	19185	3	QPSK	1	14	22.95	0	0
	1908.5	19185	3	QPSK	8	0	21.46	0-1	1
	1908.5	19185	3	QPSK	8	4	21.50	0-1	1
	1908.5	19185	3	QPSK	8	7	21.49	0-1	1
	1908.5	19185	3	QPSK	15	0	21.55	0-1	1
	1908.5	19185	3	16-QAM	1	0	21.85	0-1	1
	1908.5	19185	3	16-QAM	1	7	21.71	0-1	1
	1908.5	19185	3	16-QAM	1	14	21.80	0-1	1
	1908.5	19185	3	16-QAM	8	0	20.39	0-2	2
	1908.5	19185	3	16-QAM	8	4	20.50	0-2	2
	1908.5	19185	3	16-QAM	8	7	20.45	0-2	2
	1908.5	19185	3	16-QAM	15	0	20.49	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 46 of 78		

Table 9-24
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth
Maximum Power

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	22.43	0	0
	1850.7	18607	1.4	QPSK	1	2	22.51	0	0
	1850.7	18607	1.4	QPSK	1	5	22.40	0	0
	1850.7	18607	1.4	QPSK	3	0	22.29	0	0
	1850.7	18607	1.4	QPSK	3	2	22.30	0	0
	1850.7	18607	1.4	QPSK	3	3	22.32	0	0
	1850.7	18607	1.4	QPSK	6	0	21.26	0-1	1
	1850.7	18607	1.4	16-QAM	1	0	21.27	0-1	1
	1850.7	18607	1.4	16-QAM	1	2	21.55	0-1	1
	1850.7	18607	1.4	16-QAM	1	5	21.30	0-1	1
	1850.7	18607	1.4	16-QAM	3	0	21.25	0-1	1
	1850.7	18607	1.4	16-QAM	3	2	21.19	0-1	1
	1850.7	18607	1.4	16-QAM	3	3	21.41	0-1	1
Mid	1880.0	18900	1.4	16-QAM	6	0	20.32	0-2	2
	1880.0	18900	1.4	QPSK	1	0	22.62	0	0
	1880.0	18900	1.4	QPSK	1	2	22.57	0	0
	1880.0	18900	1.4	QPSK	1	5	22.63	0	0
	1880.0	18900	1.4	QPSK	3	0	22.41	0	0
	1880.0	18900	1.4	QPSK	3	2	22.45	0	0
	1880.0	18900	1.4	QPSK	3	3	22.42	0	0
	1880.0	18900	1.4	QPSK	6	0	21.44	0-1	1
	1880.0	18900	1.4	16-QAM	1	0	21.59	0-1	1
	1880.0	18900	1.4	16-QAM	1	2	21.73	0-1	1
	1880.0	18900	1.4	16-QAM	1	5	21.58	0-1	1
	1880.0	18900	1.4	16-QAM	3	0	21.58	0-1	1
	1880.0	18900	1.4	16-QAM	3	2	21.62	0-1	1
High	1880.0	18900	1.4	16-QAM	3	3	21.60	0-1	1
	1880.0	18900	1.4	16-QAM	6	0	20.51	0-2	2
	1909.3	19193	1.4	QPSK	1	0	22.69	0	0
	1909.3	19193	1.4	QPSK	1	2	22.67	0	0
	1909.3	19193	1.4	QPSK	1	5	22.68	0	0
	1909.3	19193	1.4	QPSK	3	0	22.45	0	0
	1909.3	19193	1.4	QPSK	3	2	22.48	0	0
	1909.3	19193	1.4	QPSK	3	3	22.49	0	0
	1909.3	19193	1.4	QPSK	6	0	21.44	0-1	1
	1909.3	19193	1.4	16-QAM	1	0	21.70	0-1	1
	1909.3	19193	1.4	16-QAM	1	2	21.54	0-1	1
	1909.3	19193	1.4	16-QAM	1	5	21.81	0-1	1
	1909.3	19193	1.4	16-QAM	3	0	21.53	0-1	1
	1909.3	19193	1.4	16-QAM	3	2	21.43	0-1	1
	1909.3	19193	1.4	16-QAM	3	3	21.42	0-1	1
	1909.3	19193	1.4	16-QAM	6	0	20.50	0-2	2

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 47 of 78		

Table 9-25
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	19.70	0	0
	1860	18700	20	QPSK	1	50	19.73	0	0
	1860	18700	20	QPSK	1	99	19.71	0	0
	1860	18700	20	QPSK	50	0	19.77	0-1	0
	1860	18700	20	QPSK	50	25	19.79	0-1	0
	1860	18700	20	QPSK	50	50	19.73	0-1	0
	1860	18700	20	QPSK	100	0	19.72	0-1	0
	1860	18700	20	16QAM	1	0	19.74	0-1	0
	1860	18700	20	16QAM	1	50	19.71	0-1	0
	1860	18700	20	16QAM	1	99	19.77	0-1	0
	1860	18700	20	16QAM	50	0	19.77	0-2	0
	1860	18700	20	16QAM	50	25	19.79	0-2	0
	1860	18700	20	16QAM	50	50	19.78	0-2	0
	1860	18700	20	16QAM	100	0	19.78	0-2	0
	1880.0	18900	20	QPSK	1	0	19.44	0	0
	1880.0	18900	20	QPSK	1	50	19.49	0	0
	1880.0	18900	20	QPSK	1	99	19.46	0	0
	1880.0	18900	20	QPSK	50	0	19.58	0-1	0
	1880.0	18900	20	QPSK	50	25	19.59	0-1	0
	1880.0	18900	20	QPSK	50	50	19.67	0-1	0
	1880.0	18900	20	QPSK	100	0	19.60	0-1	0
	1880.0	18900	20	16QAM	1	0	19.55	0-1	0
	1880.0	18900	20	16QAM	1	50	19.57	0-1	0
	1880.0	18900	20	16QAM	1	99	19.64	0-1	0
	1880.0	18900	20	16QAM	50	0	19.57	0-2	0
	1880.0	18900	20	16QAM	50	25	19.65	0-2	0
	1880.0	18900	20	16QAM	50	50	19.64	0-2	0
	1880.0	18900	20	16QAM	100	0	19.59	0-2	0
High	1900	19100	20	QPSK	1	0	19.39	0	0
	1900	19100	20	QPSK	1	50	19.47	0	0
	1900	19100	20	QPSK	1	99	19.51	0	0
	1900	19100	20	QPSK	50	0	19.55	0-1	0
	1900	19100	20	QPSK	50	25	19.57	0-1	0
	1900	19100	20	QPSK	50	50	19.59	0-1	0
	1900	19100	20	QPSK	100	0	19.60	0-1	0
	1900	19100	20	16QAM	1	0	19.21	0-1	0
	1900	19100	20	16QAM	1	50	19.26	0-1	0
	1900	19100	20	16QAM	1	99	19.35	0-1	0
	1900	19100	20	16QAM	50	0	19.51	0-2	0
	1900	19100	20	16QAM	50	25	19.25	0-2	0
	1900	19100	20	16QAM	50	50	19.51	0-2	0
	1900	19100	20	16QAM	100	0	19.52	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 48 of 78		

Table 9-26
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	19.56	0	0
	1857.5	18675	15	QPSK	1	36	19.61	0	0
	1857.5	18675	15	QPSK	1	74	19.55	0	0
	1857.5	18675	15	QPSK	36	0	19.56	0-1	0
	1857.5	18675	15	QPSK	36	18	19.56	0-1	0
	1857.5	18675	15	QPSK	36	37	19.59	0-1	0
	1857.5	18675	15	QPSK	75	0	19.59	0-1	0
	1857.5	18675	15	16QAM	1	0	19.60	0-1	0
	1857.5	18675	15	16QAM	1	36	19.65	0-1	0
	1857.5	18675	15	16QAM	1	74	19.70	0-1	0
	1857.5	18675	15	16QAM	36	0	19.55	0-2	0
	1857.5	18675	15	16QAM	36	18	19.61	0-2	0
Mid	1857.5	18675	15	16QAM	36	37	19.57	0-2	0
	1857.5	18675	15	16QAM	75	0	19.56	0-2	0
	1880.0	18900	15	QPSK	1	0	19.50	0	0
	1880.0	18900	15	QPSK	1	36	19.48	0	0
	1880.0	18900	15	QPSK	1	74	19.49	0	0
	1880.0	18900	15	QPSK	36	0	19.59	0-1	0
	1880.0	18900	15	QPSK	36	18	19.64	0-1	0
	1880.0	18900	15	QPSK	36	37	19.58	0-1	0
	1880.0	18900	15	QPSK	75	0	19.59	0-1	0
	1880.0	18900	15	16QAM	1	0	19.27	0-1	0
	1880.0	18900	15	16QAM	1	36	19.26	0-1	0
	1880.0	18900	15	16QAM	1	74	19.29	0-1	0
High	1880.0	18900	15	16QAM	36	0	19.57	0-2	0
	1880.0	18900	15	16QAM	36	18	19.56	0-2	0
	1880.0	18900	15	16QAM	36	37	19.57	0-2	0
	1880.0	18900	15	16QAM	75	0	19.54	0-2	0
	1902.5	19125	15	QPSK	1	0	19.63	0	0
	1902.5	19125	15	QPSK	1	36	19.62	0	0
	1902.5	19125	15	QPSK	1	74	19.67	0	0
	1902.5	19125	15	QPSK	36	0	19.56	0-1	0
	1902.5	19125	15	QPSK	36	18	19.49	0-1	0
	1902.5	19125	15	QPSK	36	37	19.54	0-1	0
	1902.5	19125	15	QPSK	75	0	19.57	0-1	0
	1902.5	19125	15	16QAM	1	0	19.50	0-1	0
	1902.5	19125	15	16QAM	1	36	19.51	0-1	0
	1902.5	19125	15	16QAM	1	74	19.63	0-1	0
	1902.5	19125	15	16QAM	36	0	19.52	0-2	0
	1902.5	19125	15	16QAM	36	18	19.45	0-2	0
	1902.5	19125	15	16QAM	36	37	19.49	0-2	0
	1902.5	19125	15	16QAM	75	0	19.62	0-2	0

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 49 of 78	

Table 9-27
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	19.71	0	0
	1855	18650	10	QPSK	1	25	19.67	0	0
	1855	18650	10	QPSK	1	49	19.70	0	0
	1855	18650	10	QPSK	25	0	19.51	0-1	0
	1855	18650	10	QPSK	25	12	19.54	0-1	0
	1855	18650	10	QPSK	25	25	19.54	0-1	0
	1855	18650	10	QPSK	50	0	19.58	0-1	0
	1855	18650	10	16QAM	1	0	19.31	0-1	0
	1855	18650	10	16QAM	1	25	19.26	0-1	0
	1855	18650	10	16QAM	1	49	19.26	0-1	0
	1855	18650	10	16QAM	25	0	19.52	0-2	0
	1855	18650	10	16QAM	25	12	19.57	0-2	0
	1855	18650	10	16QAM	25	25	19.57	0-2	0
Mid	1880.0	18900	10	QPSK	1	0	19.57	0	0
	1880.0	18900	10	QPSK	1	25	19.56	0	0
	1880.0	18900	10	QPSK	1	49	19.59	0	0
	1880.0	18900	10	QPSK	25	0	19.53	0-1	0
	1880.0	18900	10	QPSK	25	12	19.56	0-1	0
	1880.0	18900	10	QPSK	25	25	19.52	0-1	0
	1880.0	18900	10	QPSK	50	0	19.61	0-1	0
	1880.0	18900	10	16QAM	1	0	19.60	0-1	0
	1880.0	18900	10	16QAM	1	25	19.56	0-1	0
	1880.0	18900	10	16QAM	1	49	19.60	0-1	0
	1880.0	18900	10	16QAM	25	0	19.66	0-2	0
	1880.0	18900	10	16QAM	25	12	19.62	0-2	0
	1880.0	18900	10	16QAM	25	25	19.60	0-2	0
	1880.0	18900	10	16QAM	50	0	19.56	0-2	0
High	1905	19150	10	QPSK	1	0	19.53	0	0
	1905	19150	10	QPSK	1	25	19.49	0	0
	1905	19150	10	QPSK	1	49	19.53	0	0
	1905	19150	10	QPSK	25	0	19.60	0-1	0
	1905	19150	10	QPSK	25	12	19.57	0-1	0
	1905	19150	10	QPSK	25	25	19.57	0-1	0
	1905	19150	10	QPSK	50	0	19.60	0-1	0
	1905	19150	10	16QAM	1	0	19.41	0-1	0
	1905	19150	10	16QAM	1	25	19.35	0-1	0
	1905	19150	10	16QAM	1	49	19.46	0-1	0
	1905	19150	10	16QAM	25	0	19.56	0-2	0
	1905	19150	10	16QAM	25	12	19.64	0-2	0
	1905	19150	10	16QAM	25	25	19.64	0-2	0
	1905	19150	10	16QAM	50	0	19.66	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 50 of 78		

Table 9-28
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	19.52	0	0
	1852.5	18625	5	QPSK	1	12	19.50	0	0
	1852.5	18625	5	QPSK	1	24	19.62	0	0
	1852.5	18625	5	QPSK	12	0	19.53	0-1	0
	1852.5	18625	5	QPSK	12	6	19.54	0-1	0
	1852.5	18625	5	QPSK	12	13	19.56	0-1	0
	1852.5	18625	5	QPSK	25	0	19.50	0-1	0
	1852.5	18625	5	16-QAM	1	0	19.40	0-1	0
	1852.5	18625	5	16-QAM	1	12	19.32	0-1	0
	1852.5	18625	5	16-QAM	1	24	19.42	0-1	0
	1852.5	18625	5	16-QAM	12	0	19.51	0-2	0
	1852.5	18625	5	16-QAM	12	6	19.50	0-2	0
Mid	1852.5	18625	5	16-QAM	12	13	19.52	0-2	0
	1852.5	18625	5	16-QAM	25	0	19.51	0-2	0
	1880.0	18900	5	QPSK	1	0	19.39	0	0
	1880.0	18900	5	QPSK	1	12	19.29	0	0
	1880.0	18900	5	QPSK	1	24	19.41	0	0
	1880.0	18900	5	QPSK	12	0	19.53	0-1	0
	1880.0	18900	5	QPSK	12	6	19.63	0-1	0
	1880.0	18900	5	QPSK	12	13	19.57	0-1	0
	1880.0	18900	5	QPSK	25	0	19.54	0-1	0
	1880.0	18900	5	16-QAM	1	0	19.22	0-1	0
	1880.0	18900	5	16-QAM	1	12	19.15	0-1	0
	1880.0	18900	5	16-QAM	1	24	19.23	0-1	0
High	1880.0	18900	5	16-QAM	12	0	19.51	0-2	0
	1880.0	18900	5	16-QAM	12	6	19.56	0-2	0
	1880.0	18900	5	16-QAM	12	13	19.51	0-2	0
	1880.0	18900	5	16-QAM	25	0	19.66	0-2	0
	1907.5	19175	5	QPSK	1	0	19.50	0	0
	1907.5	19175	5	QPSK	1	12	19.43	0	0
	1907.5	19175	5	QPSK	1	24	19.59	0	0
	1907.5	19175	5	QPSK	12	0	19.65	0-1	0
	1907.5	19175	5	QPSK	12	6	19.69	0-1	0
	1907.5	19175	5	QPSK	12	13	19.69	0-1	0
	1907.5	19175	5	QPSK	25	0	19.66	0-1	0
	1907.5	19175	5	16-QAM	1	0	19.12	0-1	0
	1907.5	19175	5	16-QAM	1	12	19.10	0-1	0
	1907.5	19175	5	16-QAM	1	24	19.20	0-1	0
	1907.5	19175	5	16-QAM	12	0	19.51	0-2	0
	1907.5	19175	5	16-QAM	12	6	19.58	0-2	0
	1907.5	19175	5	16-QAM	12	13	19.64	0-2	0
	1907.5	19175	5	16-QAM	25	0	19.63	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 51 of 78		

Table 9-29
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	19.67	0	0
	1851.5	18615	3	QPSK	1	7	19.61	0	0
	1851.5	18615	3	QPSK	1	14	19.68	0	0
	1851.5	18615	3	QPSK	8	0	19.46	0-1	0
	1851.5	18615	3	QPSK	8	4	19.48	0-1	0
	1851.5	18615	3	QPSK	8	7	19.46	0-1	0
	1851.5	18615	3	QPSK	15	0	19.49	0-1	0
	1851.5	18615	3	16-QAM	1	0	19.80	0-1	0
	1851.5	18615	3	16-QAM	1	7	19.81	0-1	0
	1851.5	18615	3	16-QAM	1	14	19.82	0-1	0
	1851.5	18615	3	16-QAM	8	0	19.42	0-2	0
	1851.5	18615	3	16-QAM	8	4	19.42	0-2	0
	1851.5	18615	3	16-QAM	8	7	19.41	0-2	0
Mid	1880.0	18900	3	QPSK	1	0	19.66	0	0
	1880.0	18900	3	QPSK	1	7	19.62	0	0
	1880.0	18900	3	QPSK	1	14	19.68	0	0
	1880.0	18900	3	QPSK	8	0	19.53	0-1	0
	1880.0	18900	3	QPSK	8	4	19.51	0-1	0
	1880.0	18900	3	QPSK	8	7	19.48	0-1	0
	1880.0	18900	3	QPSK	15	0	19.61	0-1	0
	1880.0	18900	3	16-QAM	1	0	19.38	0-1	0
	1880.0	18900	3	16-QAM	1	7	19.35	0-1	0
	1880.0	18900	3	16-QAM	1	14	19.39	0-1	0
	1880.0	18900	3	16-QAM	8	0	19.42	0-2	0
	1880.0	18900	3	16-QAM	8	4	19.40	0-2	0
	1880.0	18900	3	16-QAM	8	7	19.38	0-2	0
	1880.0	18900	3	16-QAM	15	0	19.49	0-2	0
High	1908.5	19185	3	QPSK	1	0	19.74	0	0
	1908.5	19185	3	QPSK	1	7	19.72	0	0
	1908.5	19185	3	QPSK	1	14	19.72	0	0
	1908.5	19185	3	QPSK	8	0	19.55	0-1	0
	1908.5	19185	3	QPSK	8	4	19.56	0-1	0
	1908.5	19185	3	QPSK	8	7	19.58	0-1	0
	1908.5	19185	3	QPSK	15	0	19.58	0-1	0
	1908.5	19185	3	16-QAM	1	0	19.50	0-1	0
	1908.5	19185	3	16-QAM	1	7	19.48	0-1	0
	1908.5	19185	3	16-QAM	1	14	19.46	0-1	0
	1908.5	19185	3	16-QAM	8	0	19.55	0-2	0
	1908.5	19185	3	16-QAM	8	4	19.56	0-2	0
	1908.5	19185	3	16-QAM	8	7	19.58	0-2	0
	1908.5	19185	3	16-QAM	15	0	19.67	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 52 of 78		

Table 9-30
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth
Reduced Power – Hotspot Mode Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	19.54	0	0
	1850.7	18607	1.4	QPSK	1	2	19.53	0	0
	1850.7	18607	1.4	QPSK	1	5	19.51	0	0
	1850.7	18607	1.4	QPSK	3	0	19.48	0	0
	1850.7	18607	1.4	QPSK	3	2	19.55	0	0
	1850.7	18607	1.4	QPSK	3	3	19.53	0	0
	1850.7	18607	1.4	QPSK	6	0	19.55	0-1	0
	1850.7	18607	1.4	16-QAM	1	0	19.43	0-1	0
	1850.7	18607	1.4	16-QAM	1	2	19.38	0-1	0
	1850.7	18607	1.4	16-QAM	1	5	19.40	0-1	0
	1850.7	18607	1.4	16-QAM	3	0	19.46	0-1	0
	1850.7	18607	1.4	16-QAM	3	2	19.47	0-1	0
	1850.7	18607	1.4	16-QAM	3	3	19.46	0-1	0
Mid	1850.7	18607	1.4	16-QAM	6	0	19.50	0-2	0
	1880.0	18900	1.4	QPSK	1	0	19.59	0	0
	1880.0	18900	1.4	QPSK	1	2	19.63	0	0
	1880.0	18900	1.4	QPSK	1	5	19.60	0	0
	1880.0	18900	1.4	QPSK	3	0	19.55	0	0
	1880.0	18900	1.4	QPSK	3	2	19.58	0	0
	1880.0	18900	1.4	QPSK	3	3	19.57	0	0
	1880.0	18900	1.4	QPSK	6	0	19.61	0-1	0
	1880.0	18900	1.4	16-QAM	1	0	19.72	0-1	0
	1880.0	18900	1.4	16-QAM	1	2	19.64	0-1	0
	1880.0	18900	1.4	16-QAM	1	5	19.80	0-1	0
	1880.0	18900	1.4	16-QAM	3	0	19.45	0-1	0
	1880.0	18900	1.4	16-QAM	3	2	19.54	0-1	0
High	1880.0	18900	1.4	16-QAM	3	3	19.45	0-1	0
	1880.0	18900	1.4	16-QAM	6	0	19.41	0-2	0
	1909.3	19193	1.4	QPSK	1	0	19.64	0	0
	1909.3	19193	1.4	QPSK	1	2	19.60	0	0
	1909.3	19193	1.4	QPSK	1	5	19.66	0	0
	1909.3	19193	1.4	QPSK	3	0	19.51	0	0
	1909.3	19193	1.4	QPSK	3	2	19.59	0	0
	1909.3	19193	1.4	QPSK	3	3	19.49	0	0
	1909.3	19193	1.4	QPSK	6	0	19.50	0-1	0
	1909.3	19193	1.4	16-QAM	1	0	19.54	0-1	0
	1909.3	19193	1.4	16-QAM	1	2	19.48	0-1	0
	1909.3	19193	1.4	16-QAM	1	5	19.58	0-1	0
	1909.3	19193	1.4	16-QAM	3	0	19.47	0-1	0
	1909.3	19193	1.4	16-QAM	3	2	19.43	0-1	0
	1909.3	19193	1.4	16-QAM	3	3	19.47	0-1	0
	1909.3	19193	1.4	16-QAM	6	0	19.46	0-2	0

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset
Page 53 of 78		

9.4 WLAN Conducted Powers

Table 9-31
IEEE 802.11b/g Average RF Power

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11b	802.11g
2412	1	16.92	14.25
2437	6	16.80	14.46
2462	11	16.93	14.33

Table 9-32
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]
		IEEE Transmission Mode
		802.11n
5190	38	11.93
5230	46	11.77
5270	54	11.72
5310	62	11.73
5510	102	11.84
5590	118	11.83
5630	126	11.72
5710	142	11.71
5755	151	11.91
5795	159	11.92

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

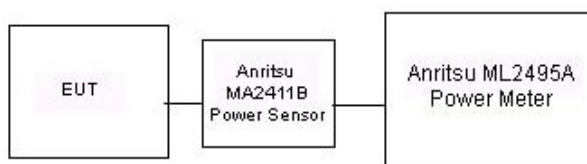


Figure 9-3
Power Measurement Setup

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 54 of 78	

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/6/2015	750H	22.5	710	0.856	43.208	0.890	42.149	-3.82%	2.51%
			740	0.882	42.672	0.893	41.994	-1.23%	1.61%
			755	0.896	42.477	0.894	41.916	0.22%	1.34%
11/5/2015	835H	22.4	820	0.915	41.668	0.899	41.578	1.78%	0.22%
			835	0.930	41.473	0.900	41.500	3.33%	-0.07%
			850	0.944	41.294	0.916	41.500	3.06%	-0.50%
11/9/2015	835H	23.8	820	0.923	41.794	0.899	41.578	2.67%	0.52%
			835	0.938	41.620	0.900	41.500	4.22%	0.29%
			850	0.952	41.436	0.916	41.500	3.93%	-0.15%
11/5/2015	1750H	22.7	1710	1.299	38.803	1.348	40.142	-3.64%	-3.34%
			1750	1.345	38.698	1.371	40.079	-1.90%	-3.45%
			1790	1.391	38.547	1.394	40.016	-0.22%	-3.67%
11/11/2015	1900H	22.5	1850	1.371	38.574	1.400	40.000	-2.07%	-3.57%
			1880	1.406	38.496	1.400	40.000	0.43%	-3.76%
			1910	1.429	38.386	1.400	40.000	2.07%	-4.03%
11/12/2015	2450H	21.8	2400	1.819	38.708	1.756	39.289	3.59%	-1.48%
			2450	1.870	38.469	1.800	39.200	3.89%	-1.86%
			2500	1.928	38.242	1.855	39.136	3.94%	-2.28%
11/16/2015	5200H-5800H	20.6	5300	4.549	34.975	4.758	35.871	-4.39%	-2.50%
			5320	4.553	34.931	4.778	35.849	-4.71%	-2.56%
			5500	4.751	34.770	4.963	35.643	-4.27%	-2.45%
			5520	4.764	34.724	4.983	35.620	-4.39%	-2.52%
			5785	5.053	34.324	5.255	35.317	-3.84%	-2.81%
11/11/2015	750B	23.4	5800	5.069	34.405	5.270	35.300	-3.81%	-2.54%
			710	0.925	54.478	0.960	55.687	-3.65%	-2.17%
			740	0.951	54.215	0.963	55.570	-1.25%	-2.44%
11/9/2015	835B	20.4	755	0.965	54.052	0.964	55.512	0.10%	-2.63%
			820	0.944	54.303	0.969	55.258	-2.58%	-1.73%
			835	0.960	54.116	0.970	55.200	-1.03%	-1.96%
11/7/2015	1750B	22.2	850	0.973	53.959	0.988	55.154	-1.52%	-2.17%
			1710	1.456	51.515	1.463	53.537	-0.48%	-3.78%
			1750	1.498	51.383	1.488	53.432	0.67%	-3.83%
11/9/2015	1900B	21.0	1790	1.532	51.164	1.514	53.326	1.19%	-4.05%
			1850	1.480	51.802	1.520	53.300	-2.63%	-2.81%
			1880	1.517	51.730	1.520	53.300	-0.20%	-2.95%
11/11/2015	1900B	21.5	1910	1.550	51.603	1.520	53.300	1.97%	-3.18%
			1850	1.513	51.397	1.520	53.300	-0.46%	-3.57%
			1880	1.547	51.287	1.520	53.300	1.78%	-3.78%
11/12/2015	2450B	22.5	1910	1.582	51.171	1.520	53.300	4.08%	-3.99%
			2400	1.894	51.263	1.902	52.767	-0.42%	-2.85%
			2450	1.958	51.088	1.950	52.700	0.41%	-3.06%
11/16/2015	2450B	21.8	2500	2.025	50.911	2.021	52.636	0.20%	-3.28%
			2400	1.973	51.321	1.902	52.767	3.73%	-2.74%
			2450	2.039	51.134	1.950	52.700	4.56%	-2.97%
11/16/2015	5200B-5800B	21.2	2500	2.106	50.864	2.021	52.636	4.21%	-3.37%
			5300	5.351	47.063	5.416	48.879	-1.20%	-3.72%
			5320	5.376	47.029	5.439	48.851	-1.16%	-3.73%
			5500	5.618	46.813	5.650	48.607	-0.57%	-3.69%
			5520	5.639	46.786	5.673	48.580	-0.60%	-3.69%
			5785	5.954	46.288	5.982	48.220	-0.47%	-4.01%
			5800	5.975	46.277	6.000	48.200	-0.42%	-3.99%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 55 of 78	

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-2
System Verification Results

SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
I	750	HEAD	11/06/2015	23.3	22.5	0.200	1003	3333	1.570	8.090	7.850	-2.97%
C	835	HEAD	11/05/2015	23.5	22.4	0.200	4d132	3288	1.860	9.250	9.300	0.54%
C	835	HEAD	11/09/2015	23.4	23.8	0.200	4d132	3288	1.890	9.250	9.450	2.16%
H	1750	HEAD	11/05/2015	23.1	22.4	0.100	1051	3263	3.850	36.200	38.500	6.35%
I	1900	HEAD	11/11/2015	23.2	22.5	0.100	5d149	3333	3.930	40.700	39.300	-3.44%
G	2450	HEAD	11/12/2015	21.6	20.9	0.100	719	3318	5.400	54.200	54.000	-0.37%
D	5300	HEAD	11/16/2015	21.9	20.4	0.050	1057	7357	4.150	84.700	83.000	-2.01%
D	5500	HEAD	11/16/2015	21.9	20.4	0.050	1057	7357	3.920	84.300	78.400	-7.00%
D	5800	HEAD	11/16/2015	21.9	20.4	0.050	1057	7357	3.870	81.100	77.400	-4.56%
H	750	BODY	11/11/2015	24.1	23.0	0.200	1003	3263	1.750	8.460	8.750	3.43%
H	835	BODY	11/09/2015	22.3	20.5	0.200	4d119	3263	1.840	9.200	9.200	0.00%
H	1750	BODY	11/07/2015	22.3	22.2	0.100	1051	3263	3.900	37.100	39.000	5.12%
I	1900	BODY	11/09/2015	20.7	21.0	0.100	5d149	3333	4.060	40.400	40.600	0.50%
K	1900	BODY	11/11/2015	23.5	21.5	0.100	5d141	3022	4.000	40.000	40.000	0.00%
H	2450	BODY	11/12/2015	23.9	22.4	0.100	719	3263	5.030	51.900	50.300	-3.08%
E	2450	BODY	11/16/2015	20.7	20.8	0.100	797	3351	4.900	51.500	49.000	-4.85%
A	5300	BODY	11/16/2015	21.6	20.8	0.050	1120	3914	3.900	75.200	78.000	3.72%
A	5500	BODY	11/16/2015	21.6	20.8	0.050	1120	3914	4.050	79.500	81.000	1.89%
A	5800	BODY	11/16/2015	21.6	20.8	0.050	1120	3914	3.780	76.300	75.600	-0.92%

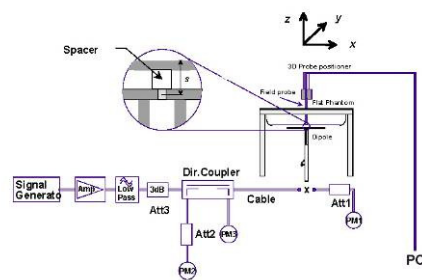


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 56 of 78

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

**Table 11-1
GSM 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.85	-0.04	Right	Cheek	4720B	1:8.3	0.158	1.035	0.164	A1
836.60	190	GSM 850	GSM	34.0	33.85	-0.02	Right	Tilt	4720B	1:8.3	0.064	1.035	0.066	
836.60	190	GSM 850	GSM	34.0	33.85	0.19	Left	Cheek	4720B	1:8.3	0.123	1.035	0.127	
836.60	190	GSM 850	GSM	34.0	33.85	0.03	Left	Tilt	4720B	1:8.3	0.093	1.035	0.096	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.5	23.39	-0.03	Right	Cheek	4720B	1:1	0.160	1.026	0.164	A2
836.60	4183	UMTS 850	RMC	23.5	23.39	0.03	Right	Tilt	4720B	1:1	0.071	1.026	0.073	
836.60	4183	UMTS 850	RMC	23.5	23.39	0.19	Left	Cheek	4720B	1:1	0.115	1.026	0.118	
836.60	4183	UMTS 850	RMC	23.5	23.39	0.07	Left	Tilt	4720B	1:1	0.091	1.026	0.093	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-3
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	23.5	23.50	0.04	Right	Cheek	4729B	1:1	0.230	1.000	0.230	
1732.40	1412	UMTS 1750	RMC	23.5	23.50	-0.08	Right	Tilt	4729B	1:1	0.177	1.000	0.177	
1732.40	1412	UMTS 1750	RMC	23.5	23.50	0.12	Left	Cheek	4729B	1:1	0.231	1.000	0.231	A3
1732.40	1412	UMTS 1750	RMC	23.5	23.50	0.00	Left	Tilt	4729B	1:1	0.185	1.000	0.185	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 57 of 78

Table 11-4
GSM 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.5	30.17	0.07	Right	Cheek	4729B	1:8.3	0.122	1.079	0.132	
1880.00	661	GSM 1900	GSM	30.5	30.17	0.04	Right	Tilt	4729B	1:8.3	0.110	1.079	0.119	
1880.00	661	GSM 1900	GSM	30.5	30.17	0.18	Left	Cheek	4729B	1:8.3	0.133	1.079	0.144	A4
1880.00	661	GSM 1900	GSM	30.5	30.17	0.03	Left	Tilt	4729B	1:8.3	0.056	1.079	0.060	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	23.5	22.79	0.11	Right	Cheek	4729B	1:1	0.183	1.178	0.216	
1880.00	9400	UMTS 1900	RMC	23.5	22.79	0.04	Right	Tilt	4729B	1:1	0.148	1.178	0.174	
1880.00	9400	UMTS 1900	RMC	23.5	22.79	0.12	Left	Cheek	4729B	1:1	0.227	1.178	0.267	A5
1880.00	9400	UMTS 1900	RMC	23.5	22.79	0.08	Left	Tilt	4729B	1:1	0.097	1.178	0.114	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-6
LTE Band 17 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.14	0	Right	Cheek	QPSK	1	0	4729B	1:1	0.065	1.000	0.065	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.11	1	Right	Cheek	QPSK	25	12	4729B	1:1	0.050	1.081	0.054	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.16	0	Right	Tilt	QPSK	1	0	4729B	1:1	0.037	1.000	0.037	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.17	1	Right	Tilt	QPSK	25	12	4729B	1:1	0.029	1.081	0.031	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.07	0	Left	Cheek	QPSK	1	0	4729B	1:1	0.067	1.000	0.067	A6
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.09	1	Left	Cheek	QPSK	25	12	4729B	1:1	0.052	1.081	0.056	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.16	0	Left	Tilt	QPSK	1	0	4729B	1:1	0.038	1.000	0.038	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.18	1	Left	Tilt	QPSK	25	12	4729B	1:1	0.029	1.081	0.031	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 58 of 78

Table 11-7
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	-0.03	0	Right	Cheek	QPSK	1	25	4720B	1:1	0.138	1.000	0.138	A7
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.02	1	Right	Cheek	QPSK	25	0	4720B	1:1	0.107	1.021	0.109	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	0.11	0	Right	Tilt	QPSK	1	25	4720B	1:1	0.057	1.000	0.057	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.13	1	Right	Tilt	QPSK	25	0	4720B	1:1	0.046	1.021	0.047	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	-0.02	0	Left	Cheek	QPSK	1	25	4720B	1:1	0.095	1.000	0.095	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.05	1	Left	Cheek	QPSK	25	0	4720B	1:1	0.072	1.021	0.074	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	-0.01	0	Left	Tilt	QPSK	1	25	4720B	1:1	0.065	1.000	0.065	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.04	1	Left	Tilt	QPSK	25	0	4720B	1:1	0.051	1.021	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-8
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	0.01	0	Right	Cheek	QPSK	1	50	4729B	1:1	0.237	1.009	0.239	A8
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.36	-0.03	1	Right	Cheek	QPSK	50	25	4729B	1:1	0.182	1.033	0.188	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	-0.05	0	Right	Tilt	QPSK	1	50	4729B	1:1	0.143	1.009	0.144	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.36	-0.03	1	Right	Tilt	QPSK	50	25	4729B	1:1	0.113	1.033	0.117	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	-0.15	0	Left	Cheek	QPSK	1	50	4729B	1:1	0.235	1.009	0.237	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.36	0.07	1	Left	Cheek	QPSK	50	25	4729B	1:1	0.171	1.033	0.177	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	0.00	0	Left	Tilt	QPSK	1	50	4729B	1:1	0.127	1.009	0.128	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.36	0.00	1	Left	Tilt	QPSK	50	25	4729B	1:1	0.106	1.033	0.109	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-9
LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.0	22.65	0.15	0	Right	Cheek	QPSK	1	0	4729B	1:1	0.147	1.084	0.159	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.0	21.78	0.06	1	Right	Cheek	QPSK	50	25	4729B	1:1	0.126	1.052	0.133	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.0	22.65	-0.02	0	Right	Tilt	QPSK	1	0	4729B	1:1	0.149	1.084	0.162	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.0	21.78	0.13	1	Right	Tilt	QPSK	50	25	4729B	1:1	0.121	1.052	0.127	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.0	22.65	0.18	0	Left	Cheek	QPSK	1	0	4729B	1:1	0.190	1.084	0.206	A9
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.0	21.78	0.19	1	Left	Cheek	QPSK	50	25	4729B	1:1	0.183	1.052	0.193	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.0	22.65	0.14	0	Left	Tilt	QPSK	1	0	4729B	1:1	0.091	1.084	0.099	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.0	21.78	-0.02	1	Left	Tilt	QPSK	50	25	4729B	1:1	0.067	1.052	0.070	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 59 of 78	

**Table 11-10
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	17.5	16.93	0.06	Right	Cheek	E7207	1	99.9	0.768	0.698	1.140	1.001	0.797	A10
2462	11	802.11b	DSSS	22	17.5	16.93	0.01	Right	Tilt	E7207	1	99.9	0.681	0.590	1.140	1.001	0.674	
2462	11	802.11b	DSSS	22	17.5	16.93	-	Left	Cheek	E7207	1	99.9	0.462	-	1.140	1.001	-	
2462	11	802.11b	DSSS	22	17.5	16.93	-	Left	Tilt	E7207	1	99.9	0.383	-	1.140	1.001	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-11
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)		(W/kg)		
5310	62	802.11n	OFDM	40	12.5	11.73	-	Right	Cheek	5721B	13.5	96.4	0.450	-	1.194	1.037	-	
5310	62	802.11n	OFDM	40	12.5	11.73	0.02	Right	Tilt	5721B	13.5	96.4	0.621	0.288	1.194	1.037	0.357	
5310	62	802.11n	OFDM	40	12.5	11.73	-	Left	Cheek	5721B	13.5	96.4	0.315	-	1.194	1.037	-	
5310	62	802.11n	OFDM	40	12.5	11.73	-	Left	Tilt	5721B	13.5	96.4	0.331	-	1.194	1.037	-	
5510	102	802.11n	OFDM	40	12.5	11.84	0.17	Right	Cheek	5721B	13.5	96.4	1.109	0.489	1.164	1.037	0.590	
5510	102	802.11n	OFDM	40	12.5	11.84	0.18	Right	Tilt	5721B	13.5	96.4	1.097	0.563	1.164	1.037	0.679	
5510	102	802.11n	OFDM	40	12.5	11.84	-	Left	Cheek	5721B	13.5	96.4	0.643	-	1.164	1.037	-	
5510	102	802.11n	OFDM	40	12.5	11.84	-	Left	Tilt	5721B	13.5	96.4	0.729	-	1.164	1.037	-	
5795	159	802.11n	OFDM	40	12.5	11.92	0.12	Right	Cheek	5721B	13.5	96.4	1.402	0.579	1.143	1.037	0.686	
5795	159	802.11n	OFDM	40	12.5	11.92	0.14	Right	Tilt	5721B	13.5	96.4	1.433	0.647	1.143	1.037	0.767	A11
5795	159	802.11n	OFDM	40	12.5	11.92	-	Left	Cheek	5721B	13.5	96.4	1.052	-	1.143	1.037	-	
5795	159	802.11n	OFDM	40	12.5	11.92	-	Left	Tilt	5721B	13.5	96.4	0.771	-	1.143	1.037	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

11.2 Standalone Body-Worn SAR Data

**Table 11-12
GSM/UMTS/ Body-Worn SAR Data**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.85	0.00	15 mm	4729B	1:1	back	0.277	1.035	0.287	A12
836.60	4183	UMTS 850	RMC	23.5	23.39	-0.03	15 mm	4720B	1:1	back	0.243	1.026	0.249	A14
1732.40	1412	UMTS 1750	RMC	23.5	23.50	0.02	15 mm	4720B	1:1	back	0.744	1.000	0.744	A16
1880.00	661	GSM 1900	GSM	30.5	30.17	0.05	15 mm	4720B	1:1	back	0.418	1.079	0.451	A18
1880.00	9400	UMTS 1900	RMC	23.5	22.79	-0.01	15 mm	4720B	1:1	back	0.667	1.178	0.786	A20
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram						


FCC ID: A3LSMA510M			SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset			Page 60 of 78

Table 11-13
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.02	0	E7207	QPSK	1	0	15 mm	back	1:1	0.167	1.000	0.167	A22
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.03	1	E7207	QPSK	25	12	15 mm	back	1:1	0.134	1.081	0.145	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	-0.01	0	4720B	QPSK	1	25	15 mm	back	1:1	0.231	1.000	0.231	A24
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.01	1	4720B	QPSK	25	0	15 mm	back	1:1	0.180	1.021	0.184	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	-0.02	0	4729B	QPSK	1	50	15 mm	back	1:1	0.800	1.009	0.807	A26
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.36	0.04	1	4729B	QPSK	50	25	15 mm	back	1:1	0.607	1.033	0.627	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.33	-0.03	1	4729B	QPSK	100	0	15 mm	back	1:1	0.538	1.040	0.560	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.0	22.65	0.01	0	4729B	QPSK	1	0	15 mm	back	1:1	0.500	1.084	0.542	A28
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.0	21.78	0.02	1	4729B	QPSK	50	25	15 mm	back	1:1	0.394	1.052	0.414	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-14
DTS Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	17.5	16.93	0.04	15 mm	5721B	1	back	99.9	0.116	0.100	1.140	1.001	0.114	A30
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-15
NII Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)	(W/kg)			
5310	62	802.11n	OFDM	40	12.5	11.73	0.13	15 mm	E7207	13.5	back	96.4	0.124	0.045	1.194	1.037	0.056	A32
5510	102	802.11n	OFDM	40	12.5	11.84	0.10	15 mm	E7207	13.5	back	96.4	0.048	0.018	1.164	1.037	0.022	
5795	159	802.11n	OFDM	40	12.5	11.92	0.11	15 mm	E7207	13.5	back	96.4	0.022	0.009	1.143	1.037	0.010	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 61 of 78

11.3 Standalone Wireless Router SAR Data

Table 11-16
GPRS/UMTS Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	30.5	30.17	-0.02	10 mm	4729B	3	1:2.76	back	0.511	1.079	0.551	A13
836.60	190	GSM 850	GPRS	30.5	30.17	-0.04	10 mm	4729B	3	1:2.76	front	0.510	1.079	0.550	
836.60	190	GSM 850	GPRS	30.5	30.17	0.04	10 mm	4729B	3	1:2.76	bottom	0.296	1.079	0.319	
836.60	190	GSM 850	GPRS	30.5	30.17	0.00	10 mm	4729B	3	1:2.76	right	0.374	1.079	0.404	
836.60	190	GSM 850	GPRS	30.5	30.17	-0.03	10 mm	4729B	3	1:2.76	left	0.083	1.079	0.090	
836.60	4183	UMTS 850	RMC	23.5	23.39	0.00	10 mm	4720B	N/A	1:1	back	0.423	1.026	0.434	
836.60	4183	UMTS 850	RMC	23.5	23.39	-0.03	10 mm	4720B	N/A	1:1	front	0.432	1.026	0.443	A15
836.60	4183	UMTS 850	RMC	23.5	23.39	-0.03	10 mm	4720B	N/A	1:1	bottom	0.253	1.026	0.260	
836.60	4183	UMTS 850	RMC	23.5	23.39	0.00	10 mm	4720B	N/A	1:1	right	0.288	1.026	0.295	
836.60	4183	UMTS 850	RMC	23.5	23.39	-0.02	10 mm	4720B	N/A	1:1	left	0.064	1.026	0.066	
1732.40	1412	UMTS 1750	RMC	20.5	20.50	0.04	10 mm	4729B	N/A	1:1	back	0.729	1.000	0.729	
1732.40	1412	UMTS 1750	RMC	20.5	20.50	-0.10	10 mm	4729B	N/A	1:1	front	0.611	1.000	0.611	
1712.40	1312	UMTS 1750	RMC	20.5	20.27	-0.05	10 mm	4729B	N/A	1:1	bottom	0.948	1.054	0.999	
1732.40	1412	UMTS 1750	RMC	20.5	20.50	-0.03	10 mm	4729B	N/A	1:1	bottom	1.040	1.000	1.040	A17
1752.50	1862	UMTS 1750	RMC	20.5	20.49	-0.01	10 mm	4729B	N/A	1:1	bottom	1.020	1.002	1.022	
1732.40	1412	UMTS 1750	RMC	20.5	20.50	-0.01	10 mm	4729B	N/A	1:1	right	0.106	1.000	0.106	
1732.40	1412	UMTS 1750	RMC	20.5	20.50	0.00	10 mm	4729B	N/A	1:1	left	0.166	1.000	0.166	
1732.40	1412	UMTS 1750	RMC	20.5	20.50	-0.08	10 mm	4729B	N/A	1:1	bottom	1.010	1.000	1.010	
1880.00	661	GSM 1900	GPRS	25.0	24.75	0.11	10 mm	4729B	3	1:2.76	back	0.620	1.059	0.657	
1880.00	661	GSM 1900	GPRS	25.0	24.75	-0.12	10 mm	4729B	3	1:2.76	front	0.523	1.059	0.554	
1850.20	512	GSM 1900	GPRS	25.0	24.61	-0.08	10 mm	4729B	3	1:2.76	bottom	0.989	1.094	1.082	
1880.00	661	GSM 1900	GPRS	25.0	24.75	-0.12	10 mm	4729B	3	1:2.76	bottom	1.030	1.059	1.091	A19
1909.80	810	GSM 1900	GPRS	25.0	24.86	-0.04	10 mm	4729B	3	1:2.76	bottom	0.988	1.033	1.021	
1880.00	661	GSM 1900	GPRS	25.0	24.75	0.00	10 mm	4729B	3	1:2.76	right	0.144	1.059	0.152	
1880.00	661	GSM 1900	GPRS	25.0	24.75	-0.06	10 mm	4729B	3	1:2.76	left	0.121	1.059	0.128	
1880.00	661	GSM 1900	GPRS	25.0	24.75	-0.10	10 mm	4729B	3	1:2.76	bottom	0.985	1.059	1.043	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	0.01	10 mm	4729B	N/A	1:1	back	0.515	1.138	0.586	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	-0.02	10 mm	4729B	N/A	1:1	front	0.479	1.138	0.545	
1852.40	9262	UMTS 1900	RMC	20.5	19.91	0.04	10 mm	4729B	N/A	1:1	bottom	0.882	1.146	1.011	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	0.01	10 mm	4729B	N/A	1:1	bottom	0.888	1.138	1.011	
1907.60	9538	UMTS 1900	RMC	20.5	20.05	0.06	10 mm	4729B	N/A	1:1	bottom	0.911	1.109	1.010	A21
1880.00	9400	UMTS 1900	RMC	20.5	19.94	0.06	10 mm	4729B	N/A	1:1	right	0.130	1.138	0.148	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	0.05	10 mm	4729B	N/A	1:1	left	0.098	1.138	0.112	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries represent variability measurement

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 62 of 78

Table 11-17
LTE Band 17 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maxium Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	-0.03	0	E7207	QPSK	1	0	10 mm	back	1:1	0.242	1.000	0.242	A23
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	-0.06	1	E7207	QPSK	25	12	10 mm	back	1:1	0.191	1.081	0.206	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.01	0	E7207	QPSK	1	0	10 mm	front	1:1	0.206	1.000	0.206	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	-0.06	1	E7207	QPSK	25	12	10 mm	front	1:1	0.166	1.081	0.179	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.02	0	E7207	QPSK	1	0	10 mm	bottom	1:1	0.088	1.000	0.088	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.09	1	E7207	QPSK	25	12	10 mm	bottom	1:1	0.076	1.081	0.082	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	0.00	0	E7207	QPSK	1	0	10 mm	right	1:1	0.115	1.000	0.115	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.06	1	E7207	QPSK	25	12	10 mm	right	1:1	0.107	1.081	0.116	
710.00	23790	Mid	LTE Band 17	10	23.5	23.50	-0.01	0	E7207	QPSK	1	0	10 mm	left	1:1	0.090	1.000	0.090	
710.00	23790	Mid	LTE Band 17	10	22.5	22.16	0.02	1	E7207	QPSK	25	12	10 mm	left	1:1	0.071	1.081	0.077	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-18
LTE Band 5 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	0.01	0	4720B	QPSK	1	25	10 mm	back	1:1	0.468	1.000	0.468	A25
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.07	1	4720B	QPSK	25	0	10 mm	back	1:1	0.367	1.021	0.375	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	-0.03	0	4720B	QPSK	1	25	10 mm	front	1:1	0.417	1.000	0.417	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.00	1	4720B	QPSK	25	0	10 mm	front	1:1	0.318	1.021	0.325	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	-0.02	0	4720B	QPSK	1	25	10 mm	bottom	1:1	0.250	1.000	0.250	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.01	1	4720B	QPSK	25	0	10 mm	bottom	1:1	0.189	1.021	0.193	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	0.03	0	4720B	QPSK	1	25	10 mm	right	1:1	0.279	1.000	0.279	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	0.01	1	4720B	QPSK	25	0	10 mm	right	1:1	0.206	1.021	0.210	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	23.00	0.02	0	4720B	QPSK	1	25	10 mm	left	1:1	0.062	1.000	0.062	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.0	21.91	-0.11	1	4720B	QPSK	25	0	10 mm	left	1:1	0.052	1.021	0.053	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-19
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.33	0.01	0	4729B	QPSK	1	99	10 mm	back	1:1	0.724	1.040	0.753	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.50	-0.04	0	4729B	QPSK	50	25	10 mm	back	1:1	0.702	1.000	0.702	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.33	0.07	0	4729B	QPSK	1	99	10 mm	front	1:1	0.630	1.040	0.655	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.50	-0.01	0	4729B	QPSK	50	25	10 mm	front	1:1	0.606	1.000	0.606	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.33	-0.04	0	4729B	QPSK	1	99	10 mm	bottom	1:1	1.020	1.040	1.061	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.50	0.01	0	4729B	QPSK	50	25	10 mm	bottom	1:1	1.010	1.000	1.010	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.32	0.10	0	4729B	QPSK	100	0	10 mm	bottom	1:1	1.020	1.042	1.063	A27
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.33	-0.01	0	4729B	QPSK	1	99	10 mm	right	1:1	0.112	1.040	0.116	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.50	-0.02	0	4729B	QPSK	50	25	10 mm	right	1:1	0.111	1.000	0.111	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.33	-0.02	0	4729B	QPSK	1	99	10 mm	left	1:1	0.172	1.040	0.179	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.50	-0.02	0	4729B	QPSK	50	25	10 mm	left	1:1	0.156	1.000	0.156	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 63 of 78	

Table 11-20
LTE Band 2 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.73	0.07	0	4729B	QPSK	1	50	10 mm	back	1:1	0.516	1.064	0.549	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.79	0.02	0	4729B	QPSK	50	25	10 mm	back	1:1	0.519	1.050	0.545	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.73	-0.04	0	4729B	QPSK	1	50	10 mm	front	1:1	0.406	1.064	0.432	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.79	0.06	0	4729B	QPSK	50	25	10 mm	front	1:1	0.410	1.050	0.431	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.73	0.06	0	4729B	QPSK	1	50	10 mm	bottom	1:1	0.837	1.064	0.891	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	20.0	19.49	0.02	0	4729B	QPSK	1	50	10 mm	bottom	1:1	0.850	1.125	0.956	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.0	19.51	0.07	0	4729B	QPSK	1	99	10 mm	bottom	1:1	0.911	1.119	1.019	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.79	0.07	0	4729B	QPSK	50	25	10 mm	bottom	1:1	0.876	1.050	0.920	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	20.0	19.67	-0.03	0	4729B	QPSK	50	50	10 mm	bottom	1:1	0.902	1.079	0.973	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.0	19.59	-0.07	0	4729B	QPSK	50	50	10 mm	bottom	1:1	0.936	1.099	1.029	A29
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.72	0.06	0	4729B	QPSK	100	0	10 mm	bottom	1:1	0.866	1.067	0.924	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.73	0.16	0	4729B	QPSK	1	50	10 mm	right	1:1	0.128	1.064	0.136	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.79	0.13	0	4729B	QPSK	50	25	10 mm	right	1:1	0.128	1.050	0.134	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.73	-0.04	0	4729B	QPSK	1	50	10 mm	left	1:1	0.116	1.064	0.123	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.0	19.79	0.03	0	4729B	QPSK	50	25	10 mm	left	1:1	0.115	1.050	0.121	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-21
WLAN Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan (W/kg)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)
MHz	Ch.																(W/kg)
2462	11	802.11b	DSSS	22	17.5	16.93	-	10 mm	E7207	1	back	99.9	0.204	-	1.140	1.001	-
2462	11	802.11b	DSSS	22	17.5	16.93	0.00	10 mm	E7207	1	front	99.9	0.226	0.192	1.140	1.001	0.219
2462	11	802.11b	DSSS	22	17.5	16.93	-	10 mm	E7207	1	top	99.9	0.200	-	1.140	1.001	-
2462	11	802.11b	DSSS	22	17.5	16.93	-	10 mm	E7207	1	left	99.9	0.085	-	1.140	1.001	-
5795	159	802.11n	OFDM	40	12.5	11.92	-	10 mm	E7207	13.5	back	96.4	0.108	-	1.143	1.037	-
5795	159	802.11n	OFDM	40	12.5	11.92	-	10 mm	E7207	13.5	front	96.4	0.114	-	1.143	1.037	-
5795	159	802.11n	OFDM	40	12.5	11.92	0.10	10 mm	E7207	13.5	top	96.4	0.135	0.046	1.143	1.037	0.055
5795	159	802.11n	OFDM	40	12.5	11.92	-	10 mm	E7207	13.5	left	96.4	0.032	-	1.143	1.037	-
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body									
Spatial Peak								1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population								averaged over 1 gram									

11.4 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05r02.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05r02.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 64 of 78	

7. Per FCC KDB Publication 648474 D04v01r02, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05r02, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03.
2. Per FCC KDB Publication 447498 D01v05r02, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r03. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 65 of 78

maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.

3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.6.6 for more information. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 66 of 78

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05r02 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05r02 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2480	10.50	15	0.154

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05r02, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 67 of 78

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	GSM 850	0.164	0.797	0.961
	UMTS 850	0.164	0.797	0.961
	UMTS 1750	0.231	0.797	1.028
	GSM 1900	0.144	0.797	0.941
	UMTS 1900	0.267	0.797	1.064
	LTE Band 17	0.067	0.797	0.864
	LTE Band 5 (Cell)	0.138	0.797	0.935
	LTE Band 4 (AWS)	0.239	0.797	1.036
	LTE Band 2 (PCS)	0.206	0.797	1.003

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	GSM 850	0.164	0.767	0.931
	UMTS 850	0.164	0.767	0.931
	UMTS 1750	0.231	0.767	0.998
	GSM 1900	0.144	0.767	0.911
	UMTS 1900	0.267	0.767	1.034
	LTE Band 17	0.067	0.767	0.834
	LTE Band 5 (Cell)	0.138	0.767	0.905
	LTE Band 4 (AWS)	0.239	0.767	1.006
	LTE Band 2 (PCS)	0.206	0.767	0.973

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 68 of 78	

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.287	0.114	0.401
	UMTS 850	0.249	0.114	0.363
	UMTS 1750	0.744	0.114	0.858
	GSM 1900	0.451	0.114	0.565
	UMTS 1900	0.786	0.114	0.900
	LTE Band 17	0.167	0.114	0.281
	LTE Band 5 (Cell)	0.231	0.114	0.345
	LTE Band 4 (AWS)	0.807	0.114	0.921
	LTE Band 2 (PCS)	0.542	0.114	0.656

Table 12-5
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.287	0.056	0.343
	UMTS 850	0.249	0.056	0.305
	UMTS 1750	0.744	0.056	0.800
	GSM 1900	0.451	0.056	0.507
	UMTS 1900	0.786	0.056	0.842
	LTE Band 17	0.167	0.056	0.223
	LTE Band 5 (Cell)	0.231	0.056	0.287
	LTE Band 4 (AWS)	0.807	0.056	0.863
	LTE Band 2 (PCS)	0.542	0.056	0.598

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 69 of 78	

Table 12-6
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.287	0.154	0.441
	UMTS 850	0.249	0.154	0.403
	UMTS 1750	0.744	0.154	0.898
	GSM 1900	0.451	0.154	0.605
	UMTS 1900	0.786	0.154	0.940
	LTE Band 17	0.167	0.154	0.321
	LTE Band 5 (Cell)	0.231	0.154	0.385
	LTE Band 4 (AWS)	0.807	0.154	0.961
	LTE Band 2 (PCS)	0.542	0.154	0.696

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR.

Table 12-7
Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	GPRS 850	0.551	0.219	0.770
	UMTS 850	0.443	0.219	0.662
	UMTS 1750	1.040	0.219	1.259
	GPRS 1900	1.091	0.219	1.310
	UMTS 1900	1.011	0.219	1.230
	LTE Band 17	0.242	0.219	0.461
	LTE Band 5 (Cell)	0.468	0.219	0.687
	LTE Band 4 (AWS)	1.063	0.219	1.282
	LTE Band 2 (PCS)	1.029	0.219	1.248

FCC ID: A3LSMA510M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 70 of 78	

Table 12-8
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	GPRS 850	0.551	0.055	0.606
	UMTS 850	0.443	0.055	0.498
	UMTS 1750	1.040	0.055	1.095
	GPRS 1900	1.091	0.055	1.146
	UMTS 1900	1.011	0.055	1.066
	LTE Band 17	0.242	0.055	0.297
	LTE Band 5 (Cell)	0.468	0.055	0.523
	LTE Band 4 (AWS)	1.063	0.055	1.118
	LTE Band 2 (PCS)	1.029	0.055	1.084

12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05r02 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 71 of 78	

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 13-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	# of Time Slots	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1732.40	1412	UMTS 1750	RMC	N/A	bottom	10 mm	1.040	1.010	1.03	N/A	N/A	N/A	N/A
1900	1880.00	661	GSM 1900	GPRS	3	bottom	10 mm	1.030	0.985	1.05	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body							
Spatial Peak							1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population							averaged over 1 gram							

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 72 of 78

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	3/15/2015	Annual	3/15/2016	3629U00687
Agilent	8753E	(30kHz-6GHz) Network Analyzer	12/30/2014	Annual	12/30/2015	JP38020182
Agilent	8753ES	S-Parameter Network Analyzer	1/20/2015	Annual	1/20/2016	US39170122
Agilent	8753ES	Network Analyzer	3/20/2015	Annual	3/20/2016	MY40001472
Agilent	E4438C	ESG Vector Signal Generator	3/12/2015	Annual	3/12/2016	MY45090700
Agilent	E5515C	Wireless Communications Test Set	4/13/2015	Annual	4/13/2016	GB43460554
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/15/2015	Annual	3/15/2016	MY45470194
Agilent	N5182A	MXG Vector Signal Generator	3/16/2015	Annual	3/16/2016	MY47420800
Amplifier Research	1551G6	Amplifier	N/A	CBT	N/A	433971
Anritsu	MA24106A	USB Power Sensor	3/2/2015	Annual	3/2/2016	1344555
Anritsu	MA24106A	USB Power Sensor	3/2/2015	Annual	3/2/2016	1344556
Anritsu	MA2411B	Pulse Power Sensor	11/17/2014	Annual	11/17/2015	1207364
Anritsu	MA2411B	Pulse Power Sensor	3/13/2015	Annual	3/13/2016	1207470
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	1039008
Anritsu	ML2496A	Power Meter	3/13/2015	Annual	3/13/2016	1306009
Anritsu	MT8820C	Radio Communication Analyzer	9/1/2015	Annual	9/1/2016	6201144419
COMTech	AR85729-5	Solid State Amplifier	N/A	CBT	N/A	M155A00-009
Control Company	4040	Digital Thermometer	3/15/2015	Biennial	3/15/2017	150194929
Control Company	4353	Long Stem Thermometer	1/22/2015	Biennial	1/22/2017	150053081
Keysight	772D	Dual Directional Coupler	N/A	CBT	N/A	MY52180215
MCL	BW-N6W5+	6dB Attenuator	N/A	CBT	N/A	1139
MiniCircuits	SLP-2400+	Low Pass Filter	N/A	CBT	N/A	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	N/A	CBT	N/A	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	N/A	CBT	N/A	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	N/A	CBT	N/A	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	N/A	CBT	N/A	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	N/A	CBT	N/A	N/A
Mitutoyo	CD-6°CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264162
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	N/A	CBT	N/A	N/A
Narda	4772-3	Attenuator (3dB)	N/A	CBT	N/A	9406
Pasternack	NC-100	Torque Wrench	5/21/2015	Biennial	5/21/2017	N/A
Pasternack	PE2208-6	Bidirectional Coupler	N/A	CBT	N/A	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	3/18/2015	Annual	3/18/2016	128633
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
SPEAG	D1750V2	1750 MHz SAR Dipole	4/15/2015	Annual	4/15/2016	1051
SPEAG	D1900V2	1900 MHz SAR Dipole	4/14/2015	Annual	4/14/2016	5d141
SPEAG	D1900V2	1900 MHz SAR Dipole	7/14/2015	Annual	7/14/2016	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	8/20/2015	Annual	8/20/2016	719
SPEAG	D2450V2	2450 MHz SAR Dipole	10/21/2015	Annual	10/21/2016	797
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/21/2015	Annual	1/21/2016	1057
SPEAG	D5GHzV2	5 GHz SAR Dipole	2/17/2015	Annual	2/17/2016	1120
SPEAG	D750V3	750 MHz SAR Dipole	1/16/2015	Annual	1/16/2016	1003
SPEAG	D835V2	835 MHz SAR Dipole	1/16/2015	Annual	1/16/2016	4d132
SPEAG	D835V2	835 MHz SAR Dipole	4/13/2015	Annual	4/13/2016	4d119
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/14/2015	Annual	1/14/2016	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2015	Annual	3/13/2016	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/17/2015	Annual	6/17/2016	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/24/2015	Annual	8/24/2016	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/16/2015	Annual	9/16/2016	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2015	Annual	2/18/2016	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/18/2015	Annual	9/18/2016	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/27/2015	Annual	10/27/2016	1333
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/12/2015	Annual	5/12/2016	1070
SPEAG	DAKS VNA R140	VNA for Portable DAK	8/16/2015	Annual	8/16/2016	80513
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	7/14/2015	Annual	7/14/2016	1039
SPEAG	ES3DV3	SAR Probe	1/23/2015	Annual	1/23/2016	3318
SPEAG	ES3DV3	SAR Probe	5/20/2015	Annual	5/20/2016	3263
SPEAG	ES3DV3	SAR Probe	9/18/2015	Annual	9/18/2016	3288
SPEAG	ES3DV3	SAR Probe	10/29/2015	Annual	10/29/2016	3333
SPEAG	EX3DV4	SAR Probe	2/10/2015	Annual	2/10/2016	3914
SPEAG	EX3DV4	SAR Probe	4/23/2015	Annual	4/23/2016	7357
SPEAG	ES3DV2	SAR Probe	8/26/2015	Annual	8/26/2016	3022
SPEAG	ES3DV3	SAR Probe	6/22/2015	Annual	6/22/2016	3351

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 73 of 78	

15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty							k=2	24.2	23.5
(95% CONFIDENCE LEVEL)									

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 74 of 78	

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x i/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 75 of 78	

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMA510M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset		Page 76 of 78

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 77 of 78

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01v02r01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMA510M	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1511051909-R1.A3L	Test Dates: 11/05/15 - 11/16/15	DUT Type: Portable Handset	Page 78 of 78

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.454$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-05-2015; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/18/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2015

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.27 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.158 W/kg

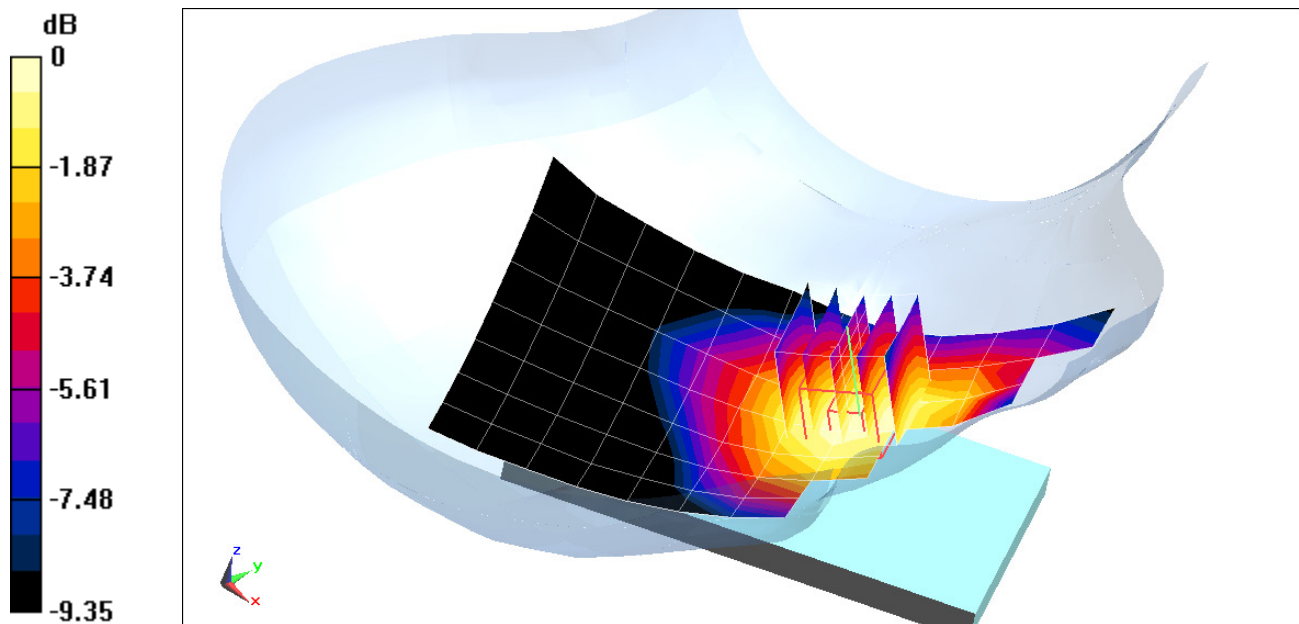

0 dB = 0.171 W/kg = -7.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.454$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-05-2015; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/18/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2015

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.42 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.160 W/kg

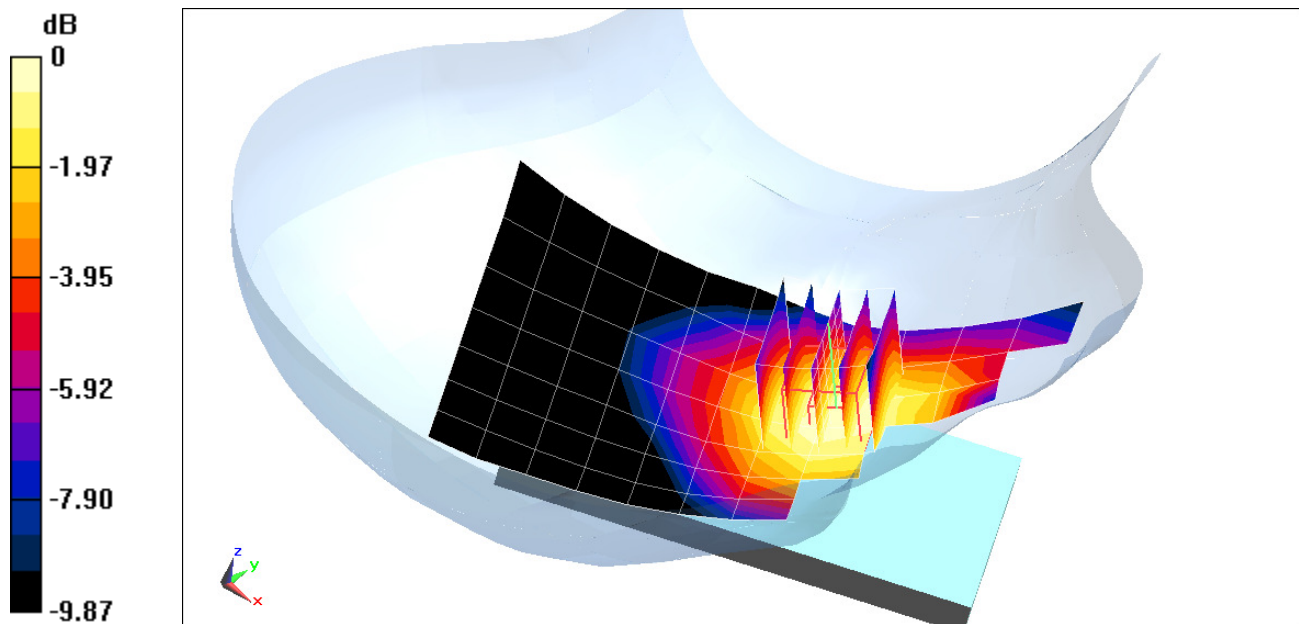

0 dB = 0.174 W/kg = -7.59 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B


Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Head; Medium parameters used (interpolated):
 $f = 1732.4 \text{ MHz}$; $\sigma = 1.325 \text{ S/m}$; $\epsilon_r = 38.744$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 11-05-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3263; ConvF(5.27, 5.27, 5.27); Calibrated: 5/20/2015;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 6/17/2015
Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.64 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.347 W/kg
SAR(1 g) = 0.231 W/kg

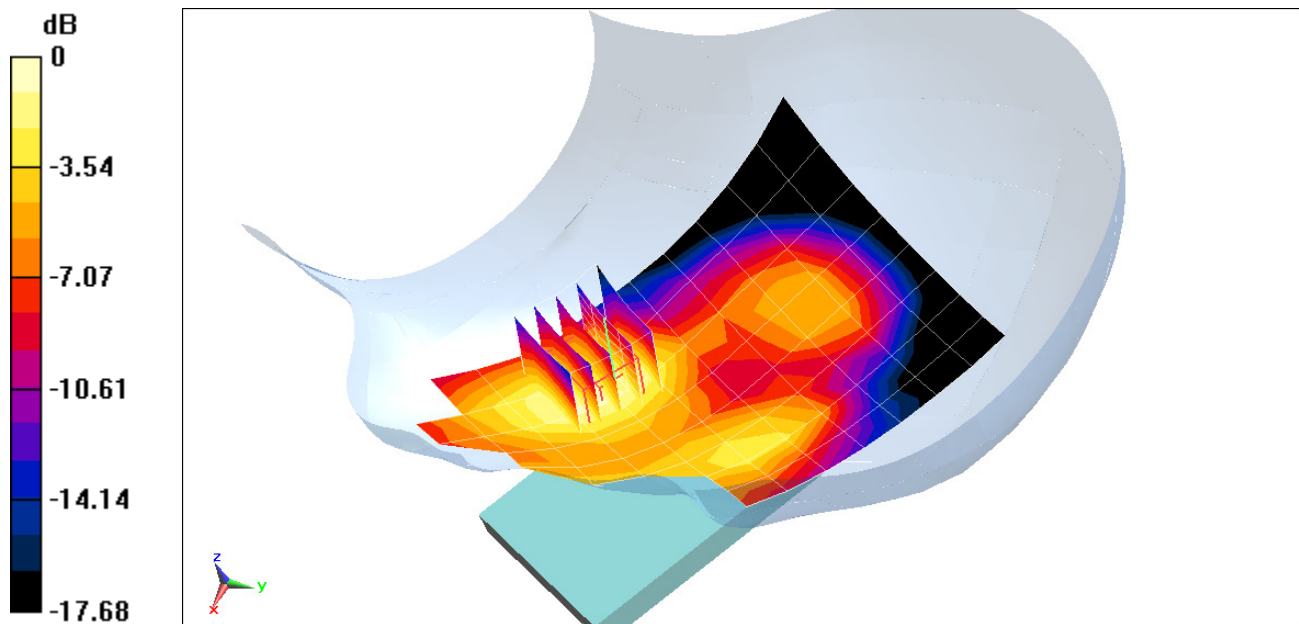

0 dB = 0.272 W/kg = -5.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 38.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-11-2015; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3333; ConvF(5.03, 5.03, 5.03); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.27 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.133 W/kg

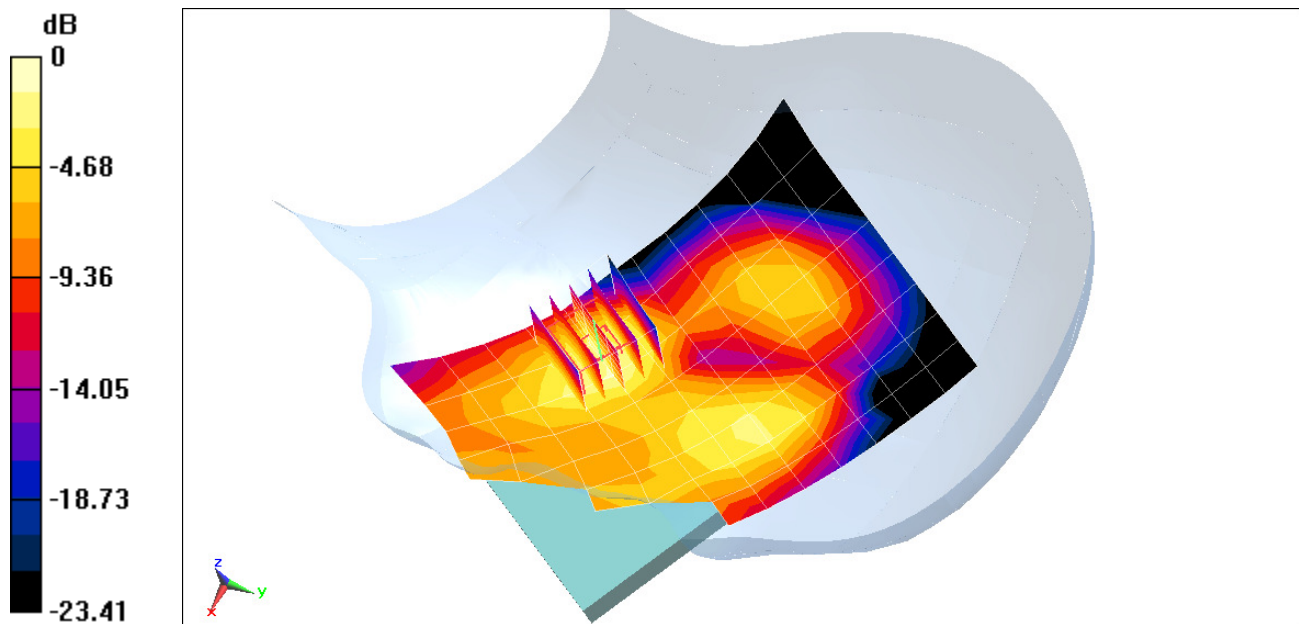

0 dB = 0.160 W/kg = -7.96 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 38.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-11-2015; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3333; ConvF(5.03, 5.03, 5.03); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch



Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.455 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.227 W/kg

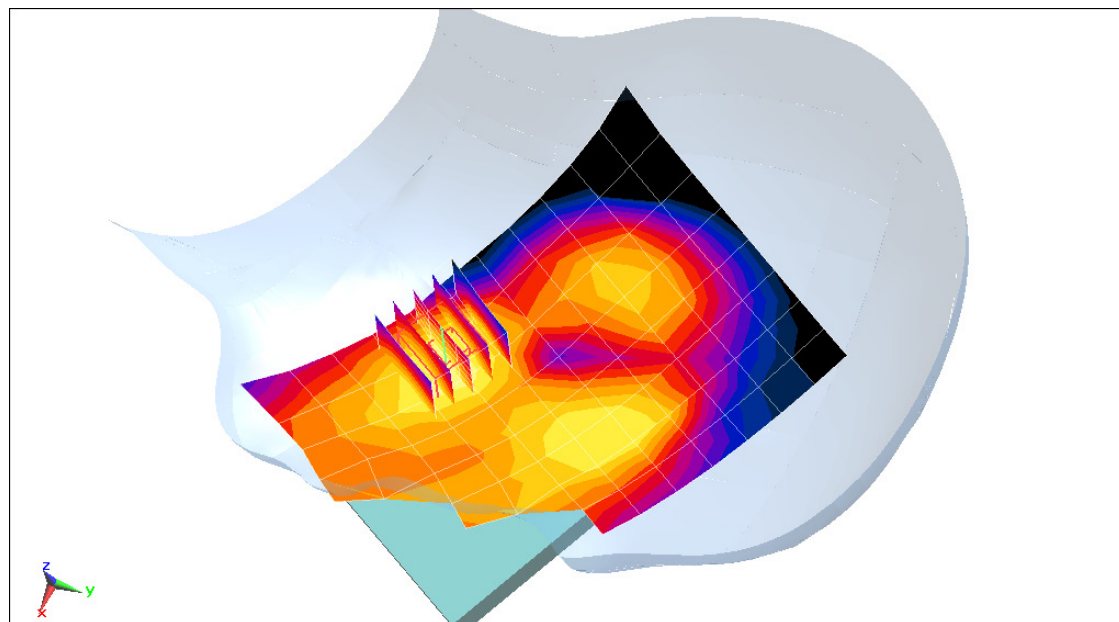

0 dB = 0.287 W/kg = -5.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.856 \text{ S/m}$; $\epsilon_r = 43.208$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-06-2015; Ambient Temp: 23.3°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3333; ConvF(6.46, 6.46, 6.46); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 17, Left Head, Cheek, Mid.ch

QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.376 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.067 W/kg

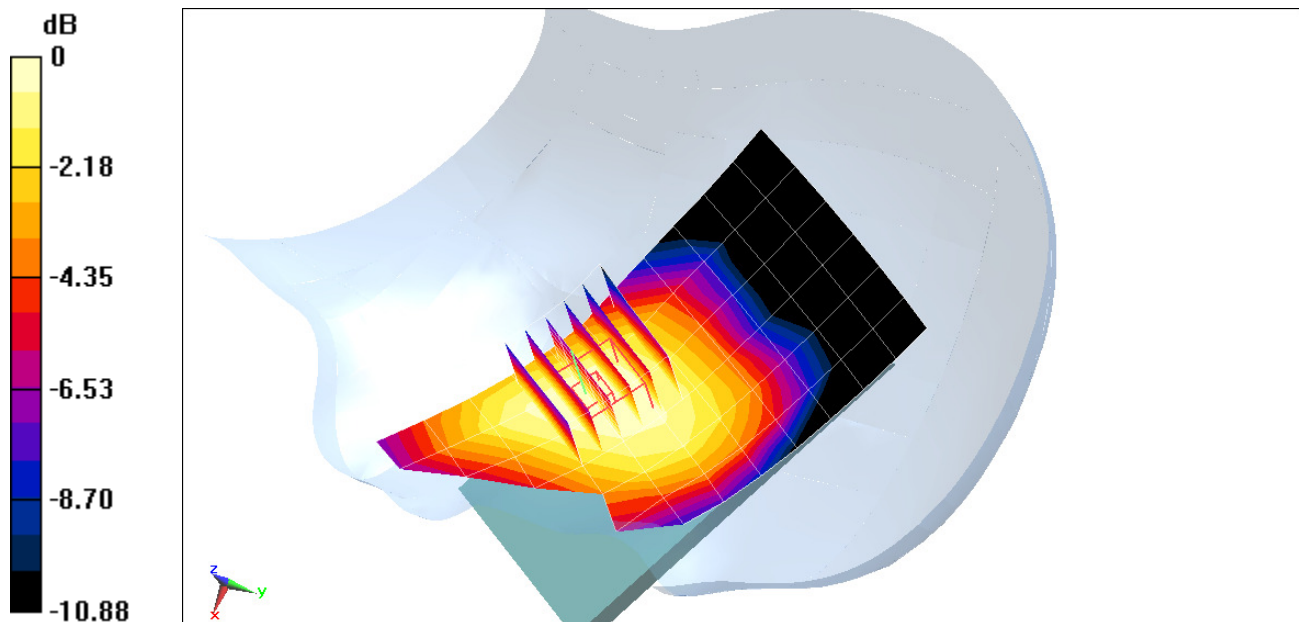

0 dB = 0.0732 W/kg = -11.35 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 41.602$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-09-2015; Ambient Temp: 23.4°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/18/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2015

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.83 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.138 W/kg

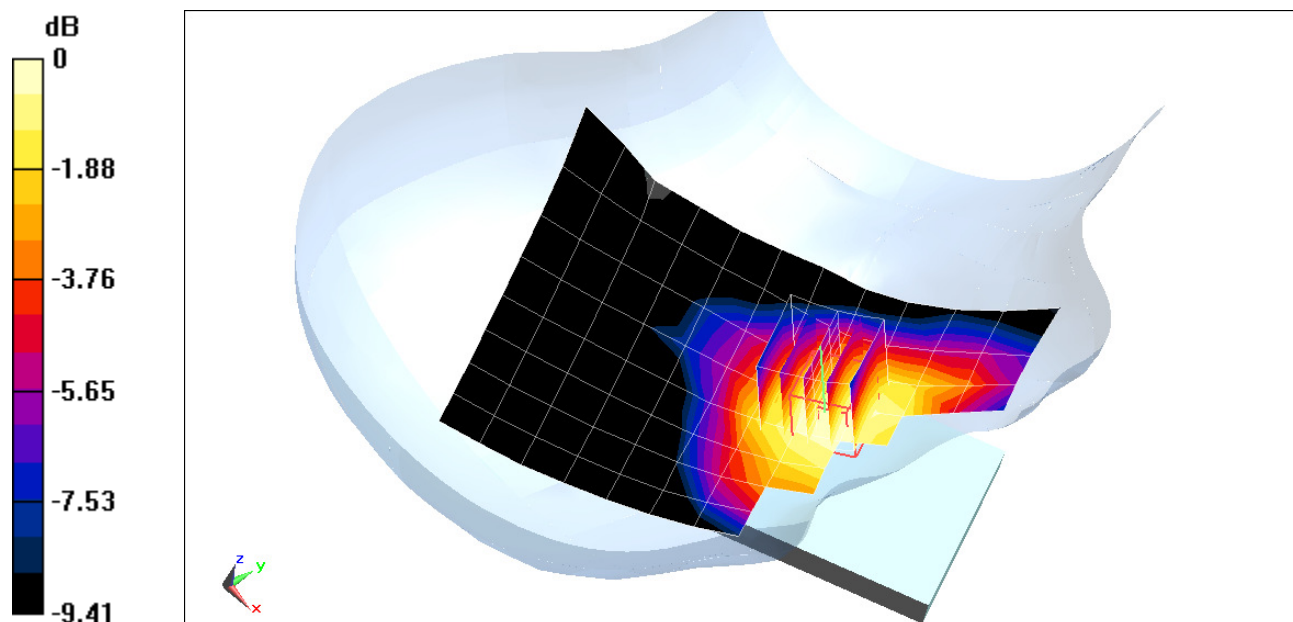

0 dB = 0.148 W/kg = -8.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.325 \text{ S/m}$; $\epsilon_r = 38.744$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-05-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3263; ConvF(5.27, 5.27, 5.27); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 4 (AWS), Right Head, Cheek, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.83 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.237 W/kg

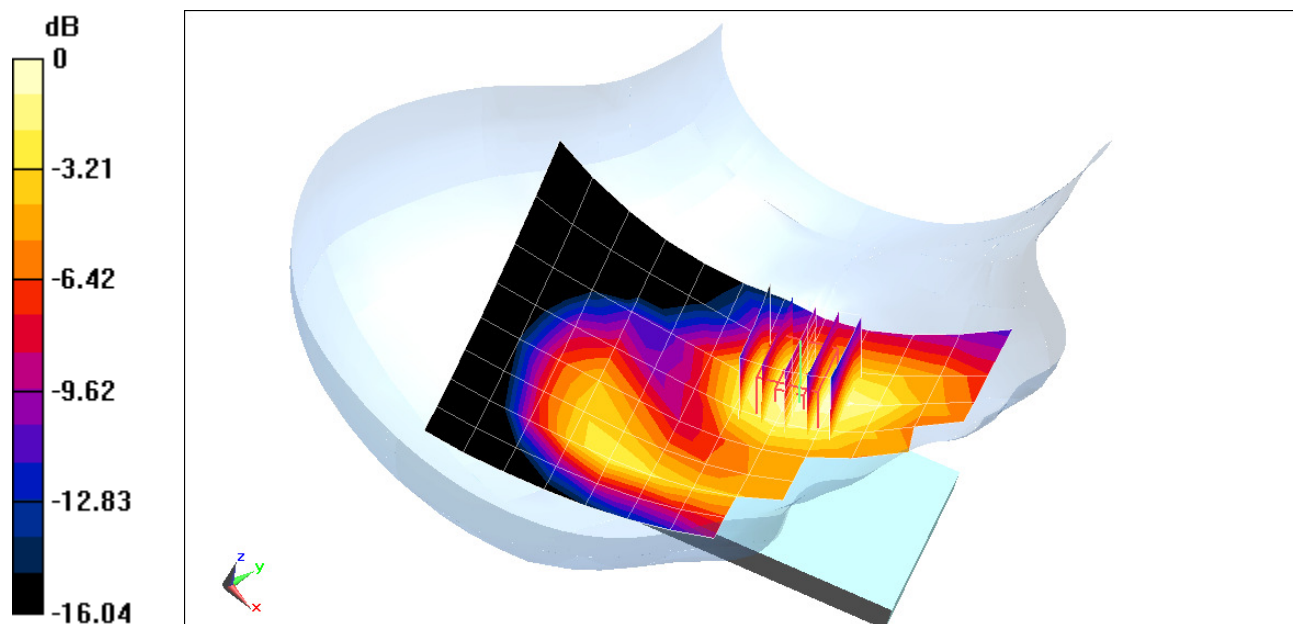

0 dB = 0.270 W/kg = -5.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 38.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-11-2015; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3333; ConvF(5.03, 5.03, 5.03); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 2 (PCS), Left Head, Cheek, Mid.ch

20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.915 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.190 W/kg

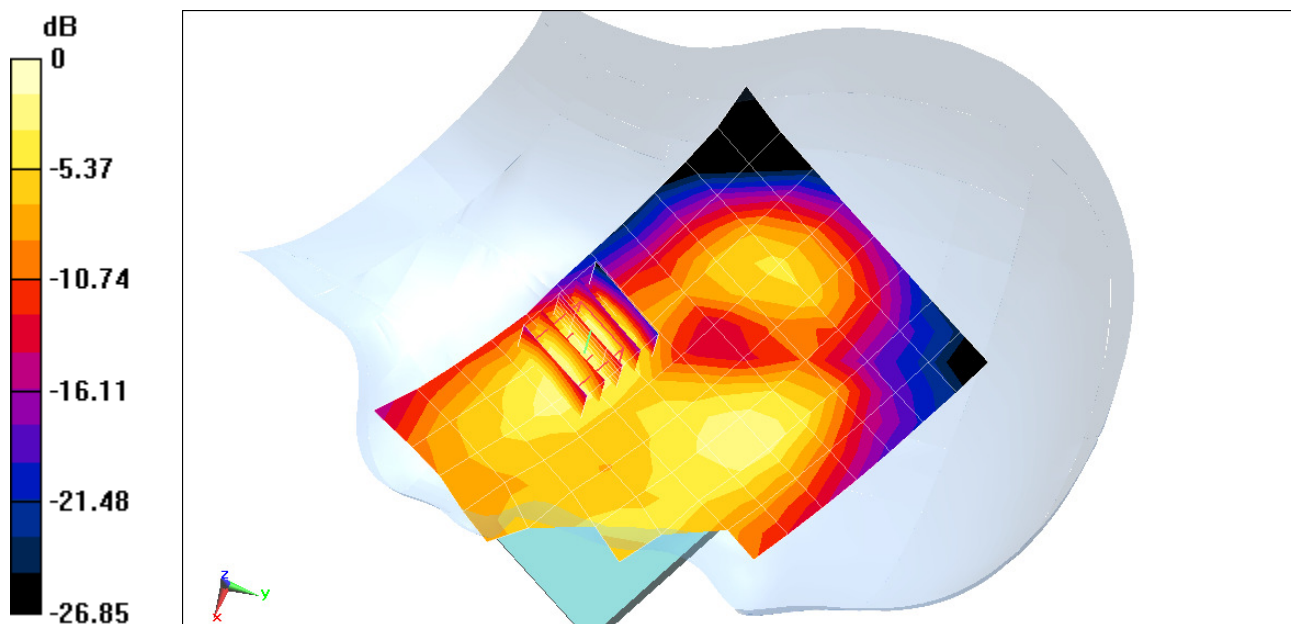

0 dB = 0.248 W/kg = -6.06 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: E7207

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.884 \text{ S/m}$; $\epsilon_r = 38.415$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-12-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3318; ConvF(4.5, 4.5, 4.5); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Right Head, Cheek, Ch 11, 1 Mbps


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.08 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.698 W/kg

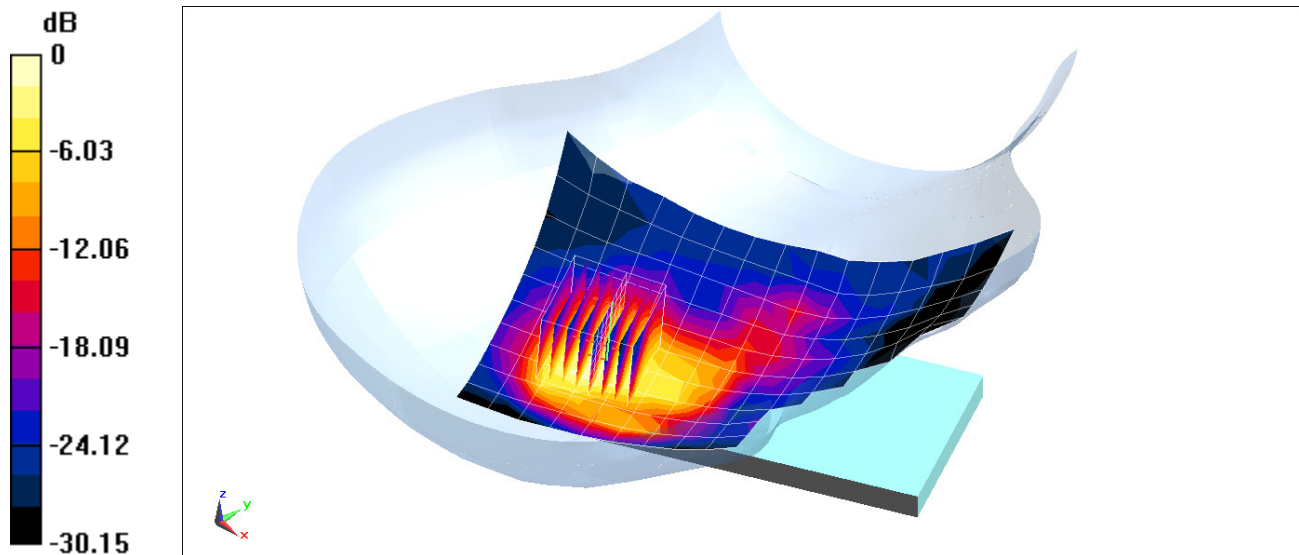

0 dB = 0.903 W/kg = -0.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 5721B

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used (interpolated):

$f = 5795 \text{ MHz}$; $\sigma = 5.064 \text{ S/m}$; $\epsilon_r = 34.378$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-16-2015; Ambient Temp: 21.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF(4.41, 4.41, 4.41); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11n, U-NII-3, 40 MHz Bandwidth, Right Tilt, Cheek, Ch 159, 13.5 Mbps


Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 12.31 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 0.647 W/kg

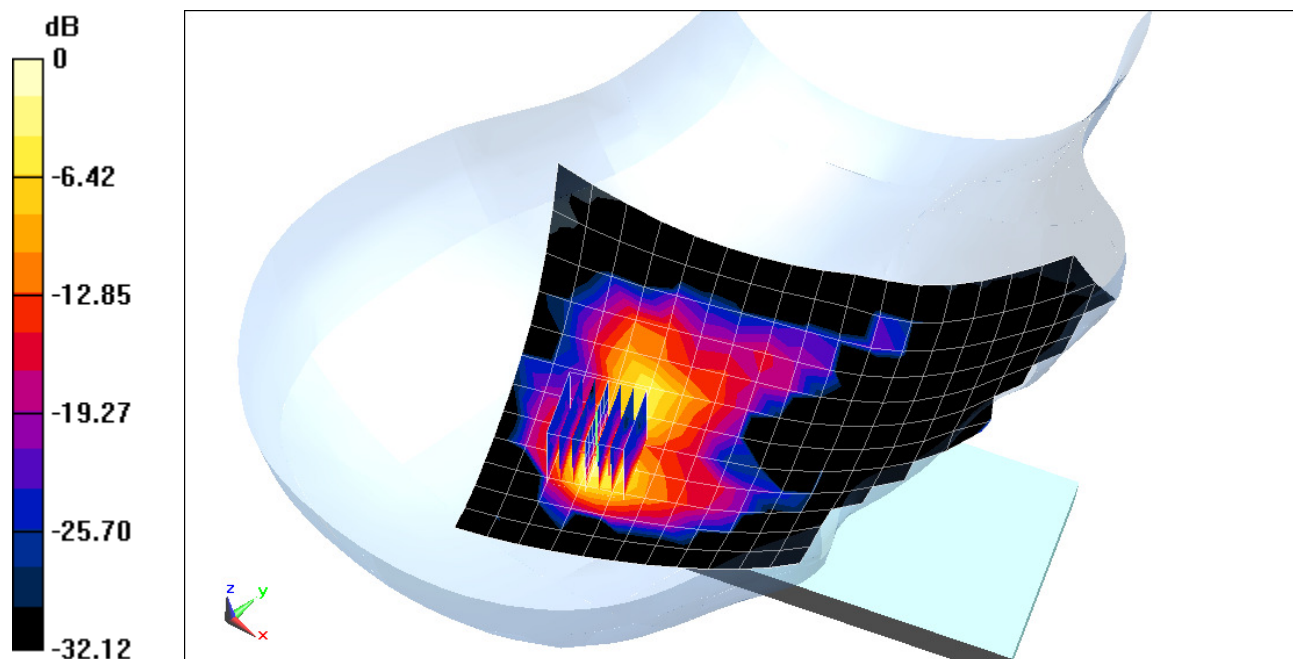

0 dB = 1.83 W/kg = 2.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.099$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.00 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.277 W/kg

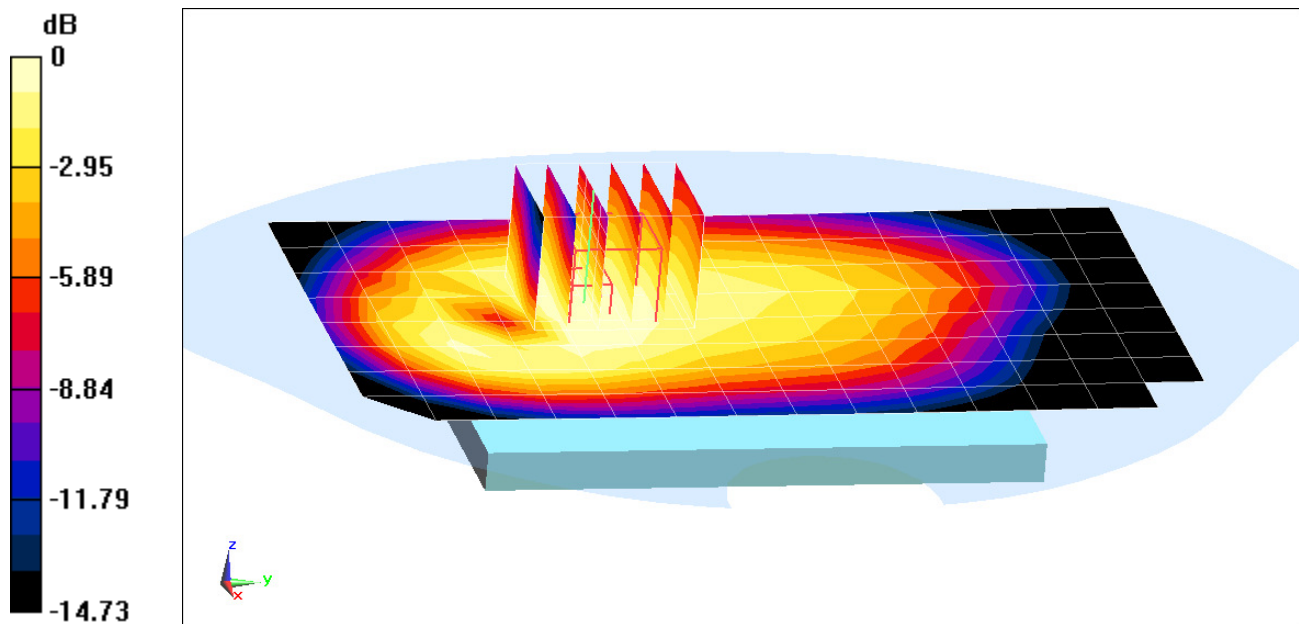

0 dB = 0.308 W/kg = -5.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.099$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.61 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.511 W/kg

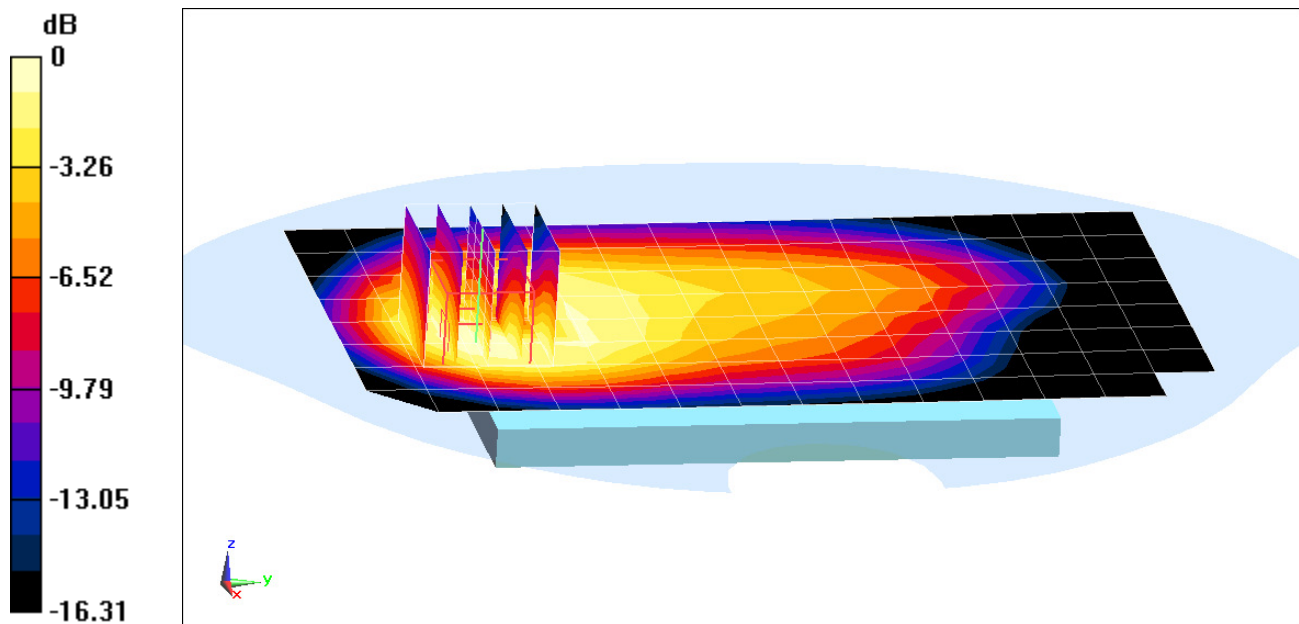

0 dB = 0.613 W/kg = -2.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.099$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.41 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.243 W/kg

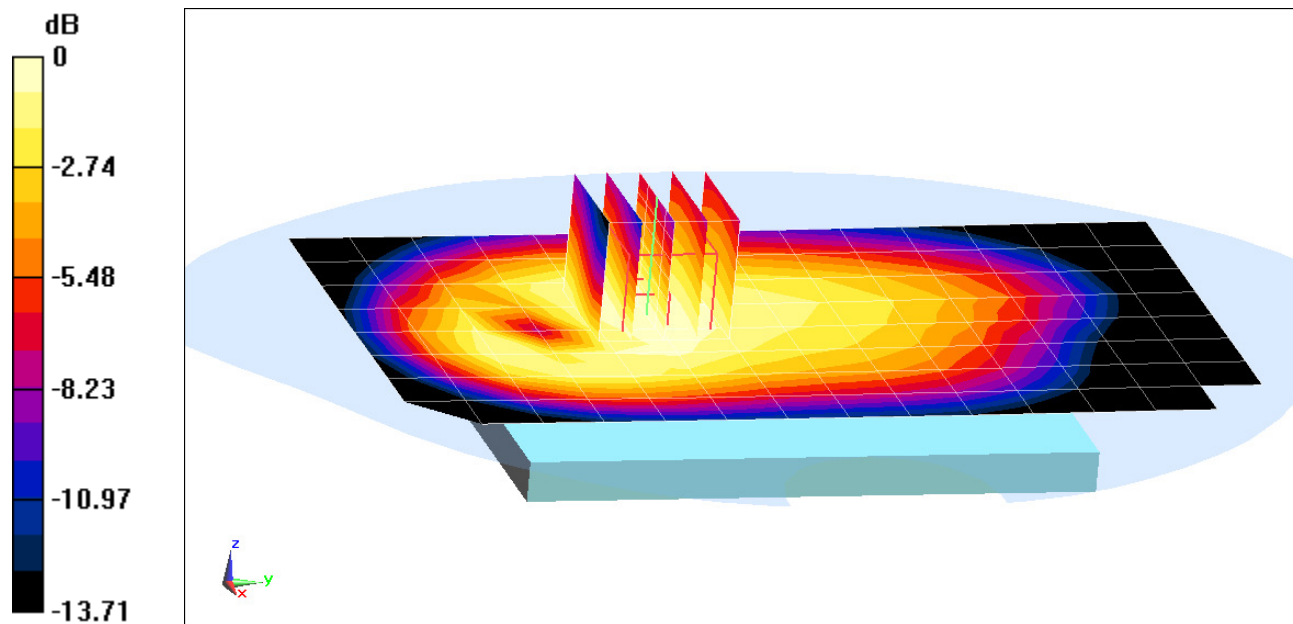

0 dB = 0.269 W/kg = -5.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.099$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Front side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.39 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.432 W/kg

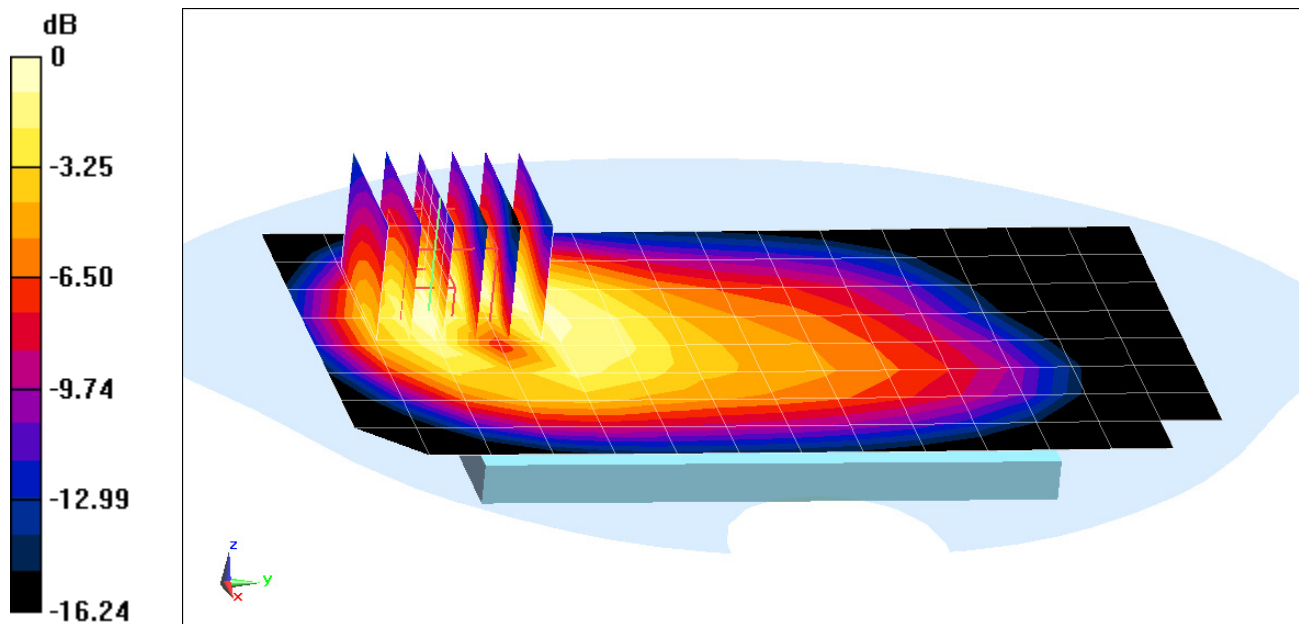

0 dB = 0.527 W/kg = -2.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 51.441$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-07-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3263; ConvF(4.88, 4.88, 4.88); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Back side, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.05 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.744 W/kg

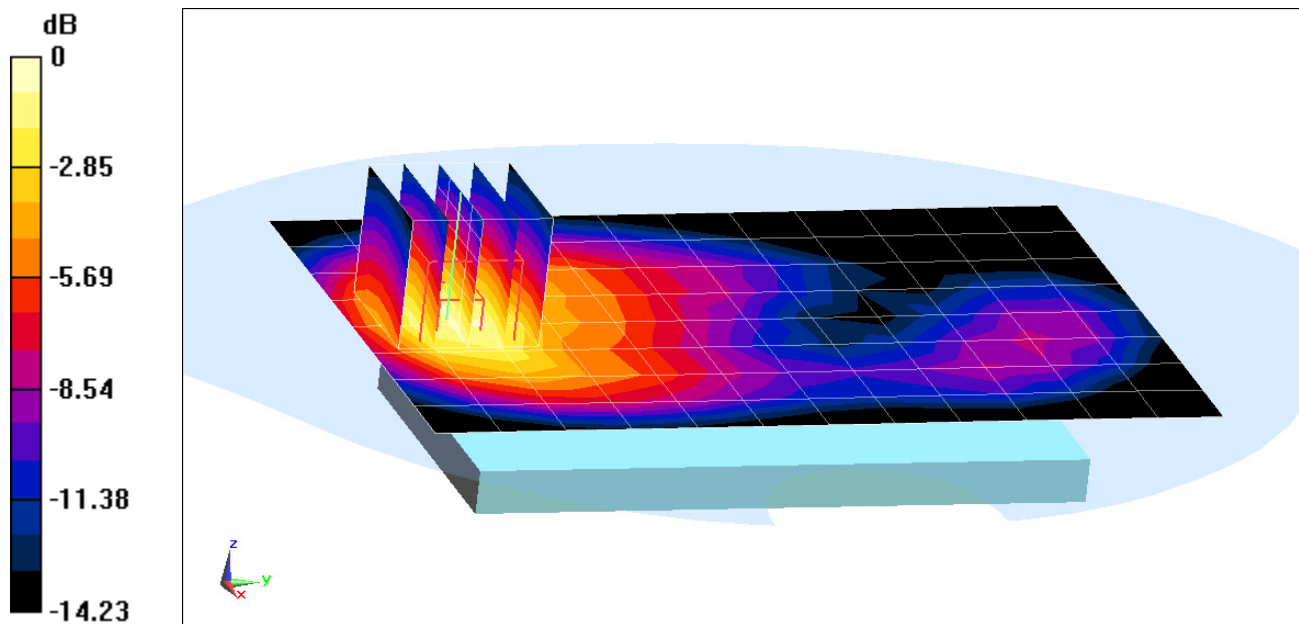

0 dB = 0.891 W/kg = -0.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 51.441$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-07-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3263; ConvF(4.88, 4.88, 4.88); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Bottom Edge, Mid.ch


Area Scan (10x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.80 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 1.04 W/kg

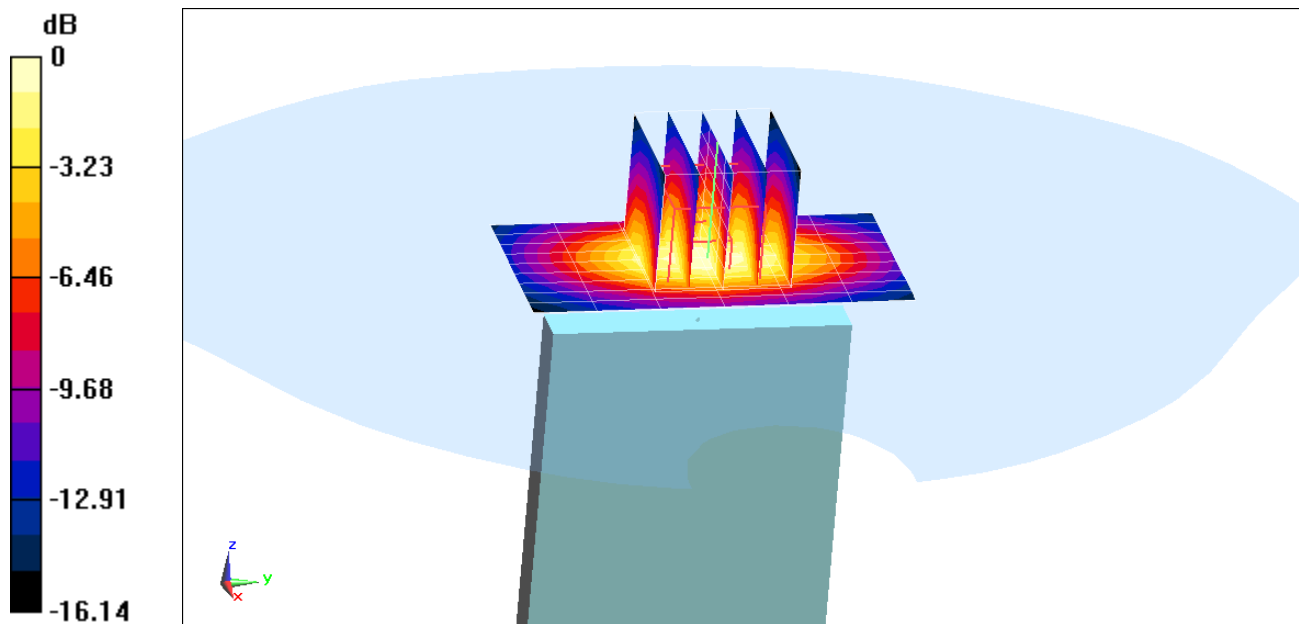

0 dB = 1.28 W/kg = 1.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 51.73$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Body SAR, Back side, Mid.ch



Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.65 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.418 W/kg

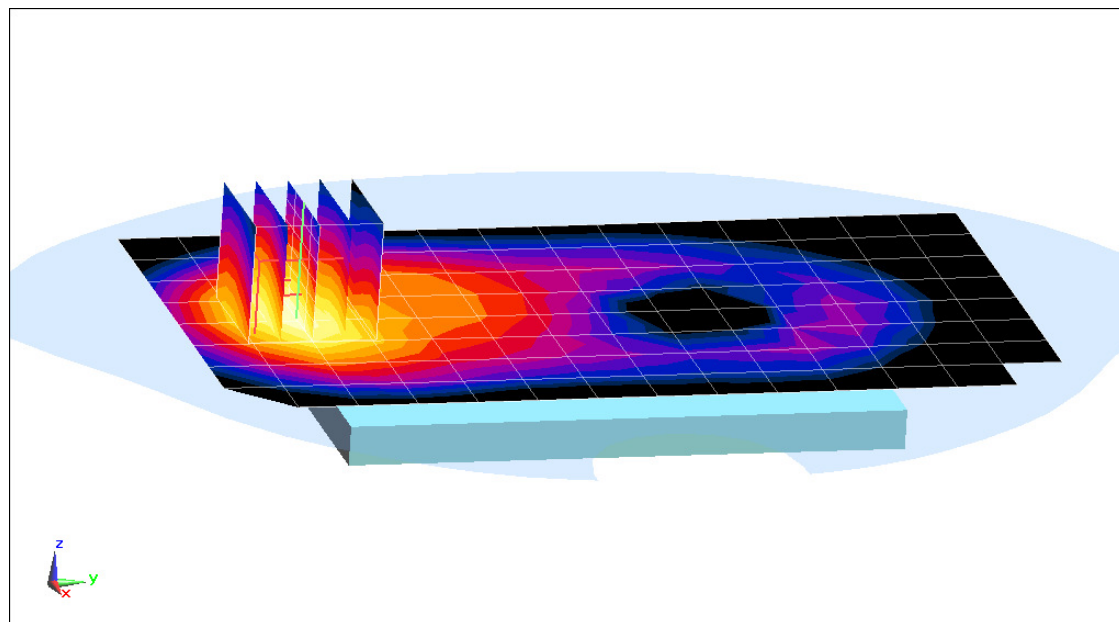

0 dB = 0.500 W/kg = -3.01 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 51.73$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots


Area Scan (10x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.05 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.03 W/kg

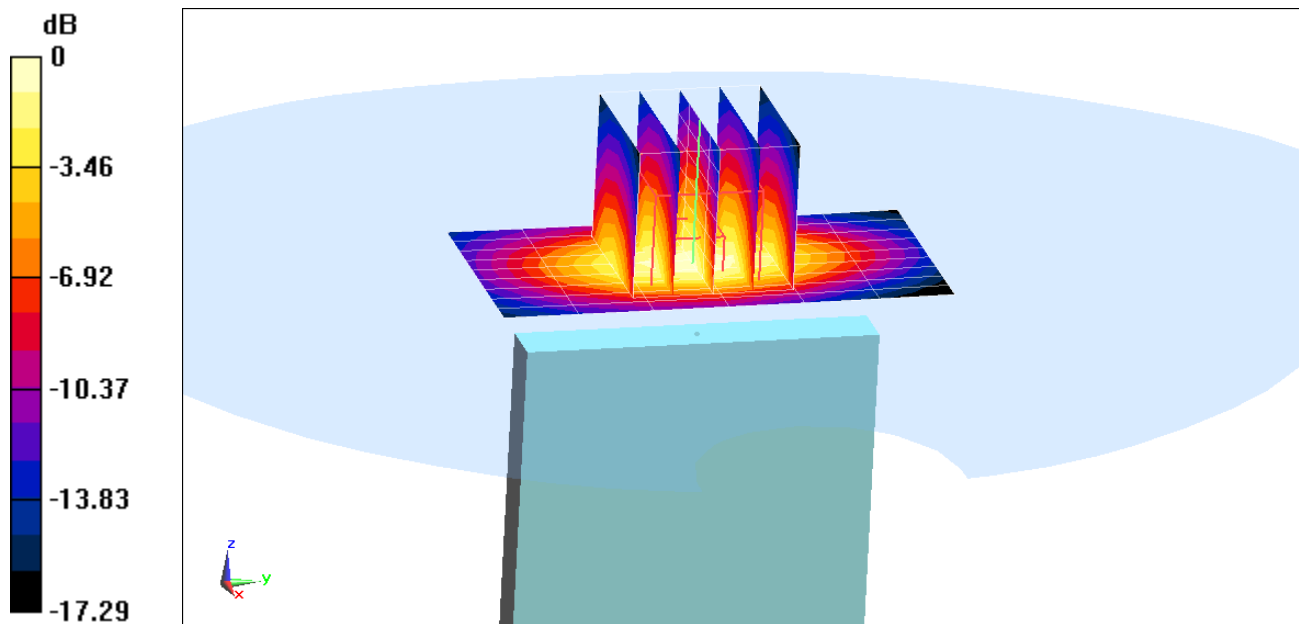

0 dB = 1.27 W/kg = 1.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 51.73$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.667 W/kg

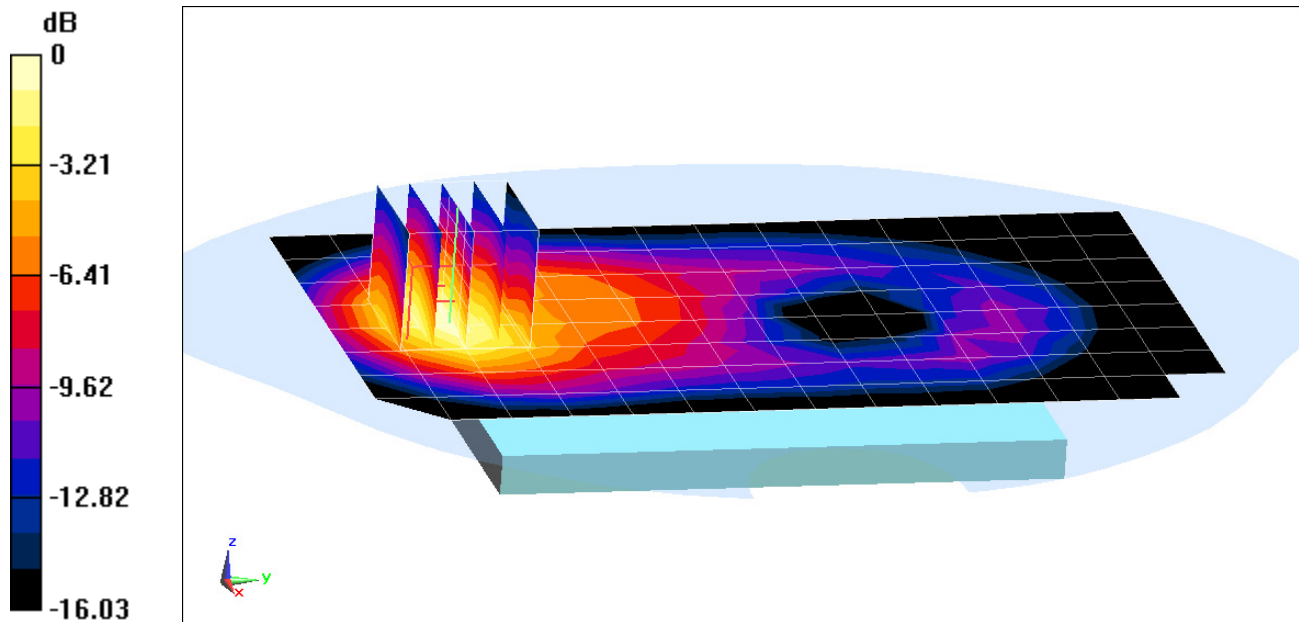

0 dB = 0.799 W/kg = -0.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.547 \text{ S/m}$; $\epsilon_r = 51.613$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.96 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.911 W/kg

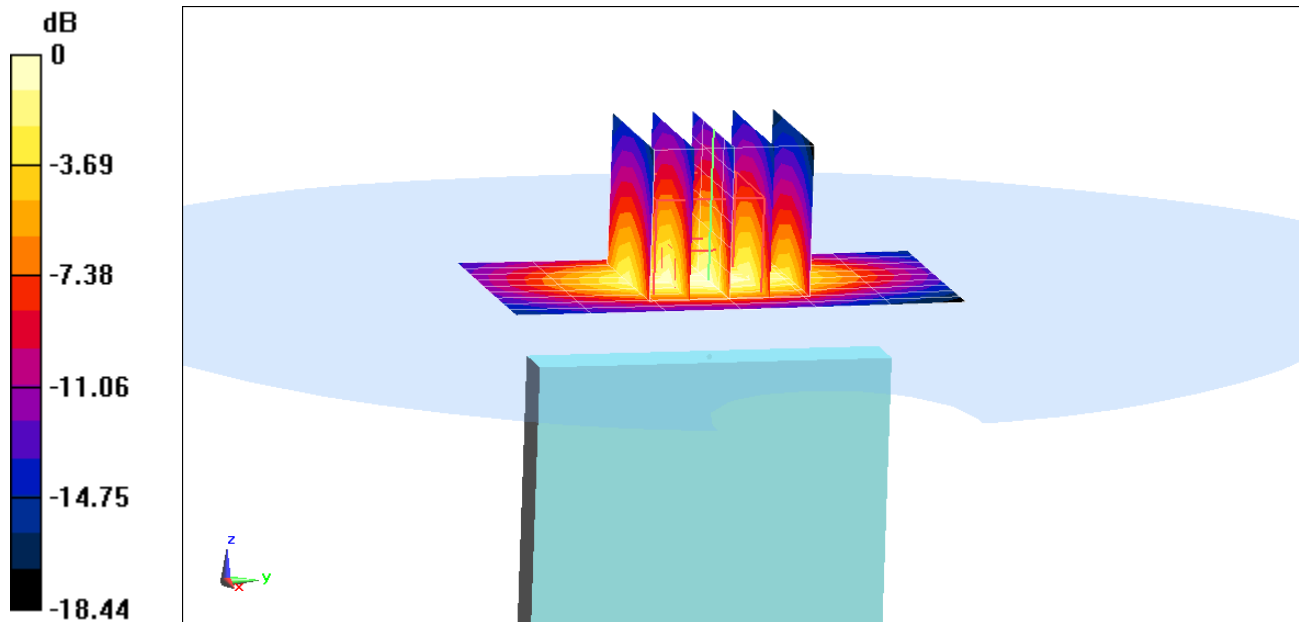

0 dB = 1.11 W/kg = 0.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: E7207

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 54.478$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-11-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.07, 6.07, 6.07); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 17, Body SAR, Back side, Mid.ch

10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.79 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.167 W/kg

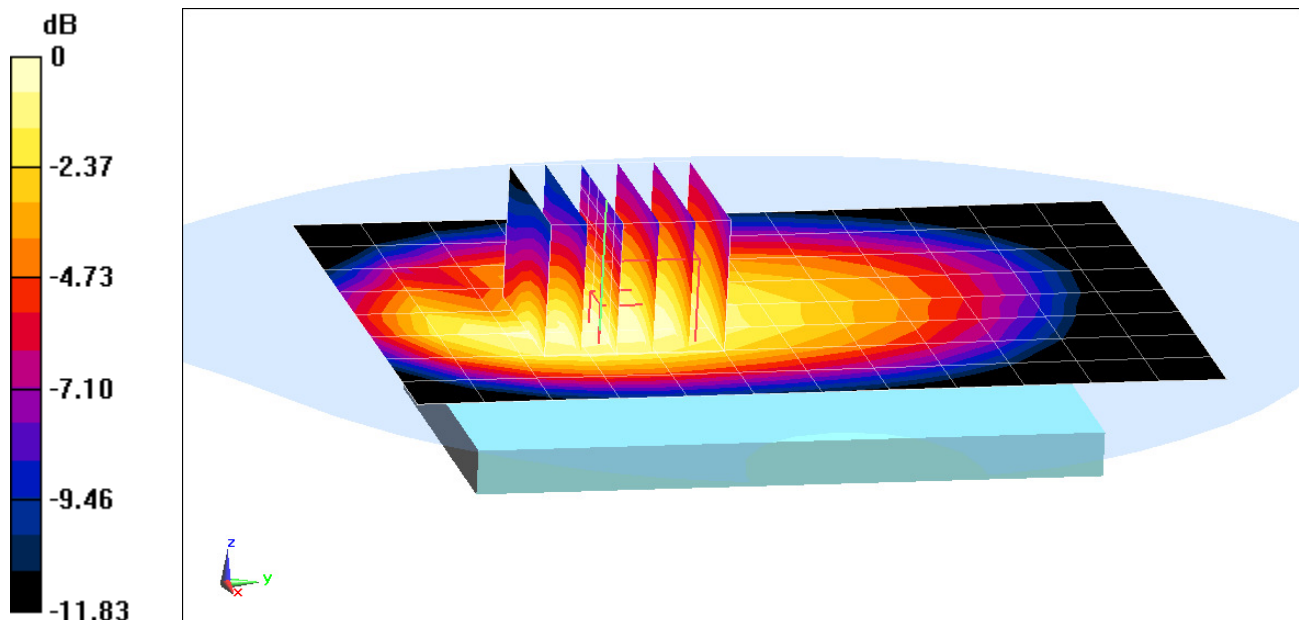

0 dB = 0.187 W/kg = -7.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: E7207

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 54.478$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-11-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.07, 6.07, 6.07); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 17, Body SAR, Back side, Mid.ch

10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.87 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.242 W/kg

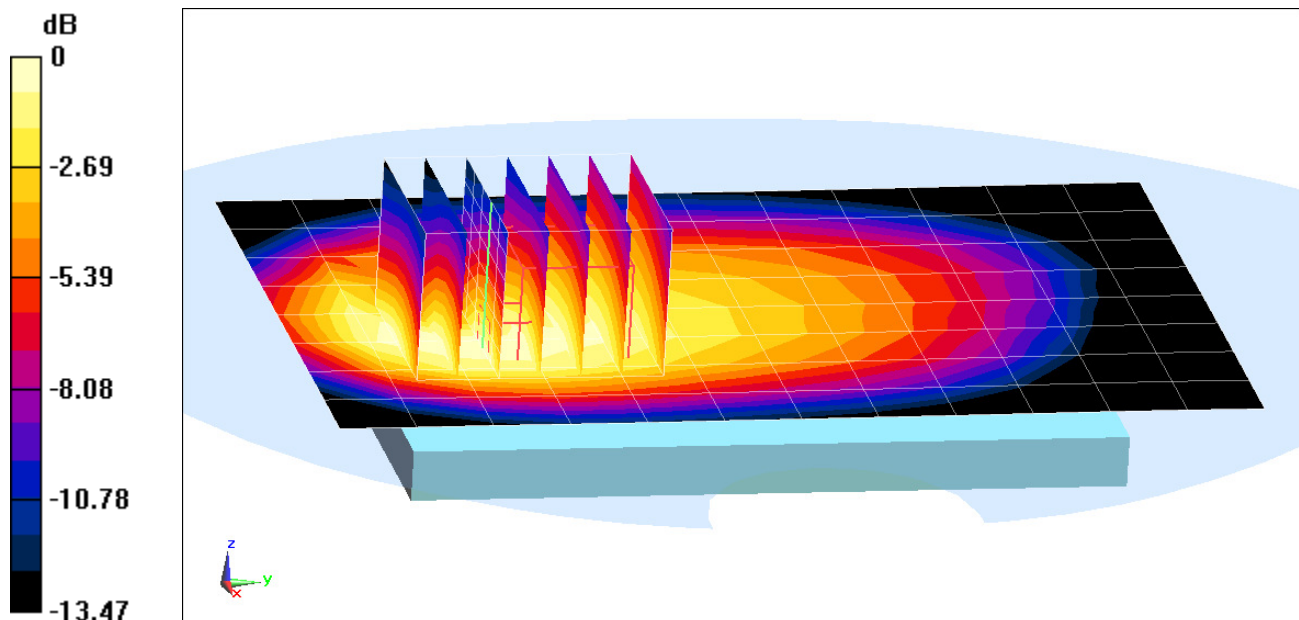

0 dB = 0.282 W/kg = -5.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.65 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.231 W/kg

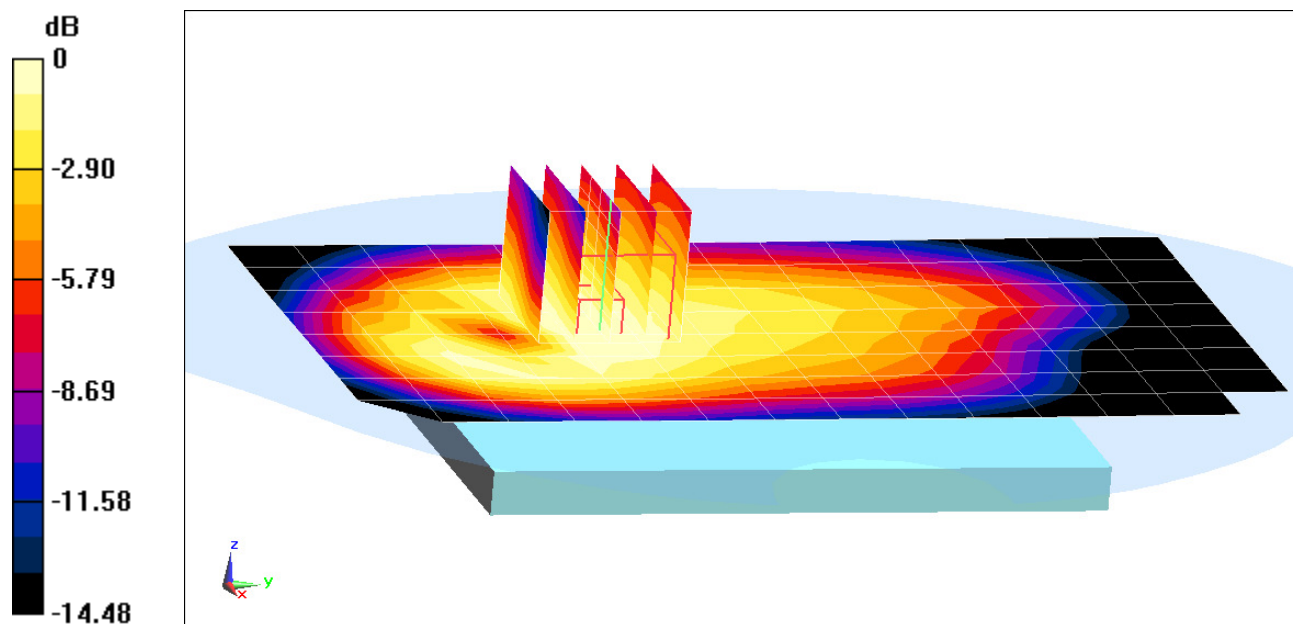

0 dB = 0.258 W/kg = -5.88 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4720B

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch

10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.50 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.468 W/kg

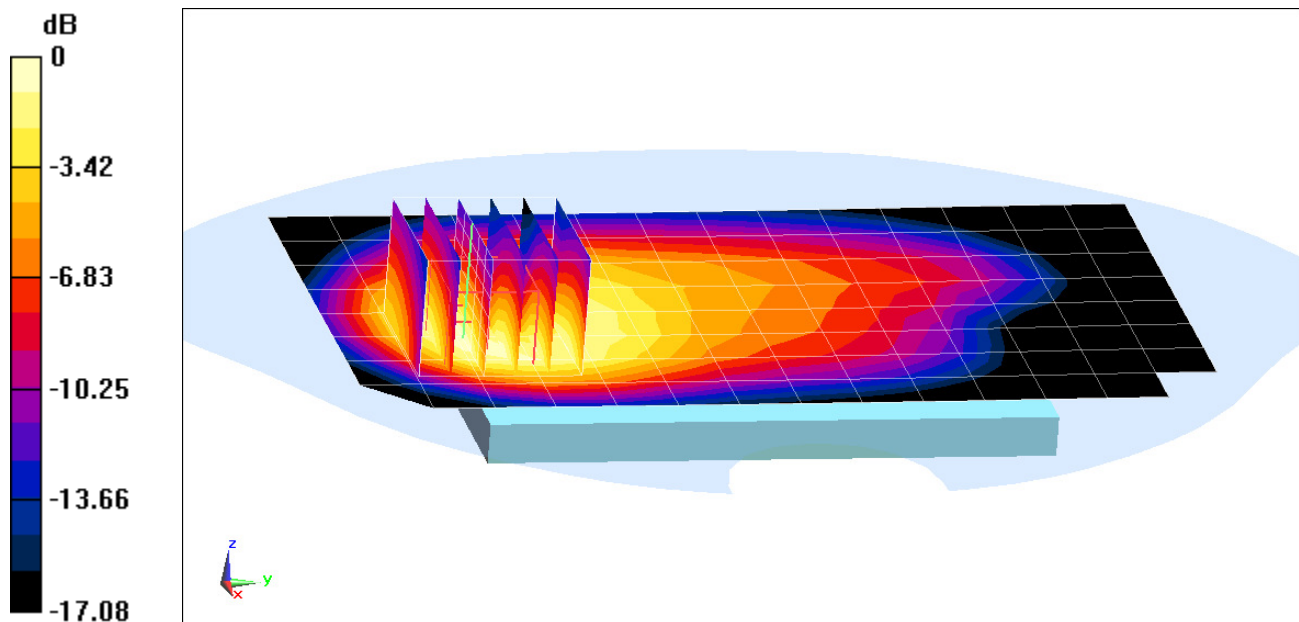

0 dB = 0.576 W/kg = -2.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 51.441$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-07-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3263; ConvF(4.88, 4.88, 4.88); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.69 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.800 W/kg

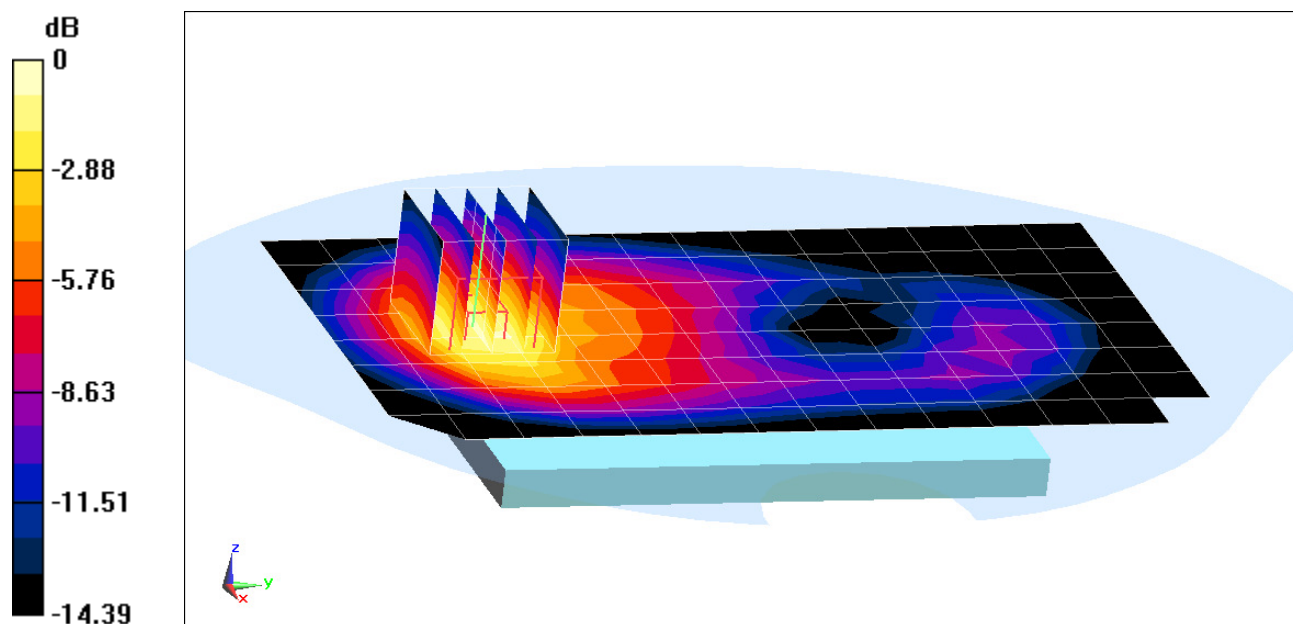

0 dB = 0.959 W/kg = -0.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 51.441$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-07-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3263; ConvF(4.88, 4.88, 4.88); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 4 (AWS), Body SAR, Bottom Edge, Mid.ch

20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset


Area Scan (13x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.25 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.02 W/kg

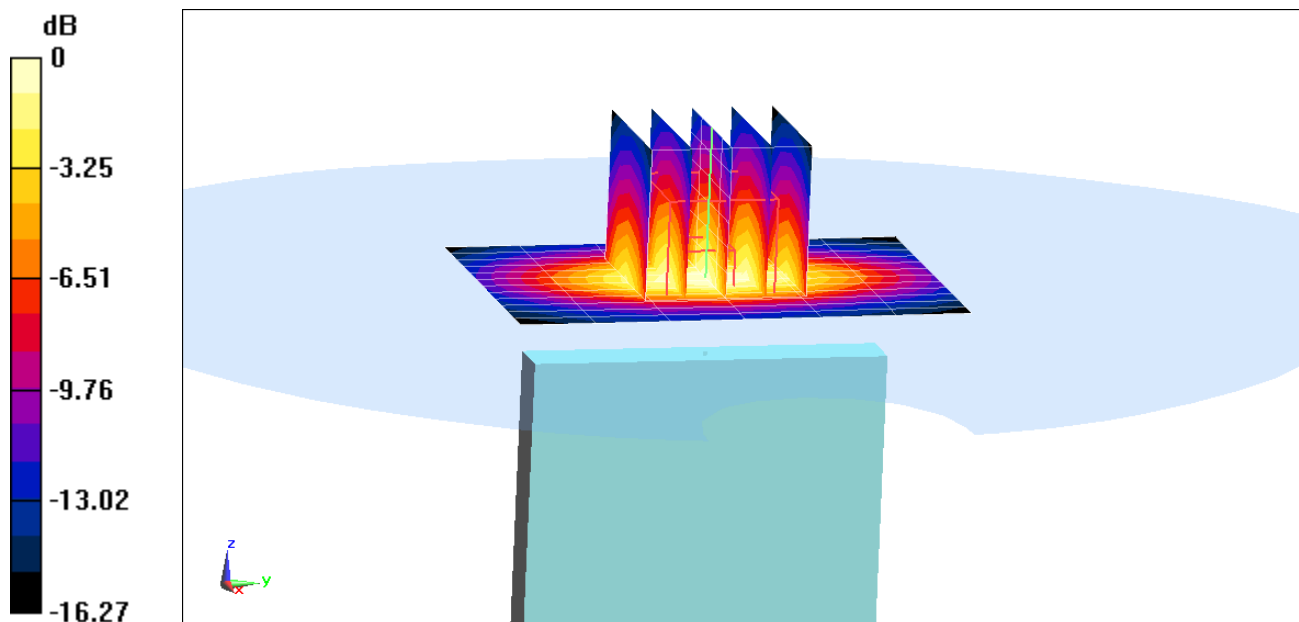

0 dB = 1.25 W/kg = 0.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 51.73$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 2 (PCS), Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.14 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.500 W/kg

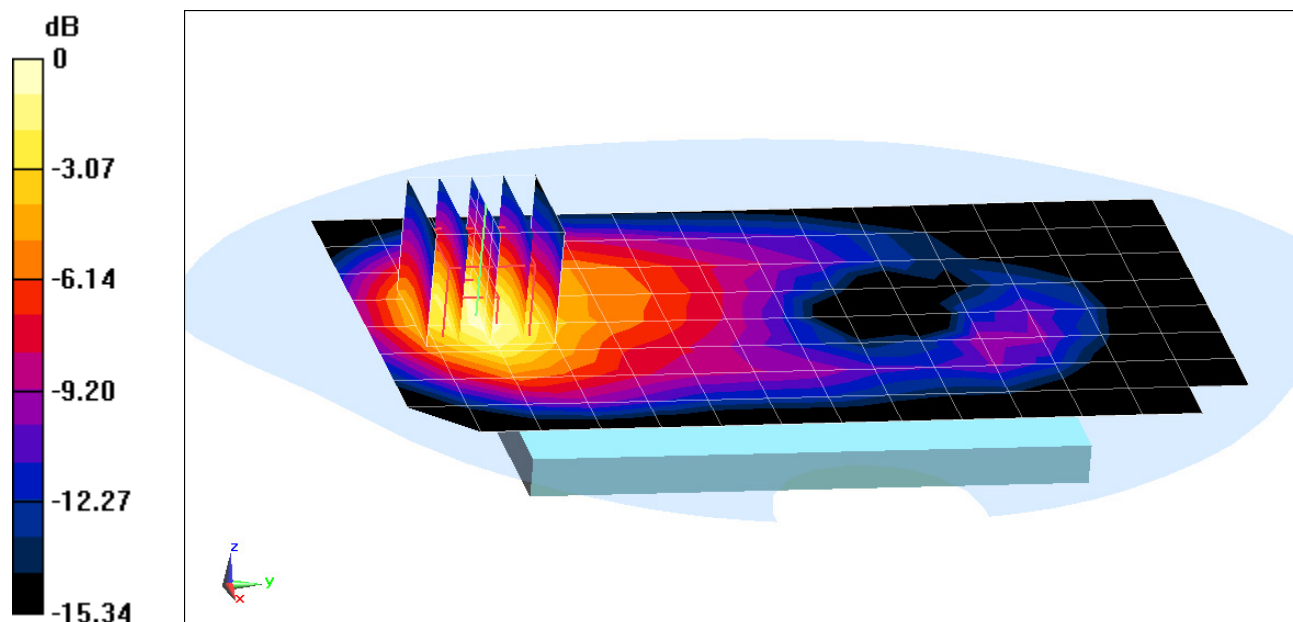

0 dB = 0.607 W/kg = -2.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 4729B

Communication System: UID 0, LTE Band 2 (PCS), Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.539 \text{ S/m}$; $\epsilon_r = 51.645$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 2 (PCS), Body SAR, Bottom Edge, High.ch

20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.936 W/kg

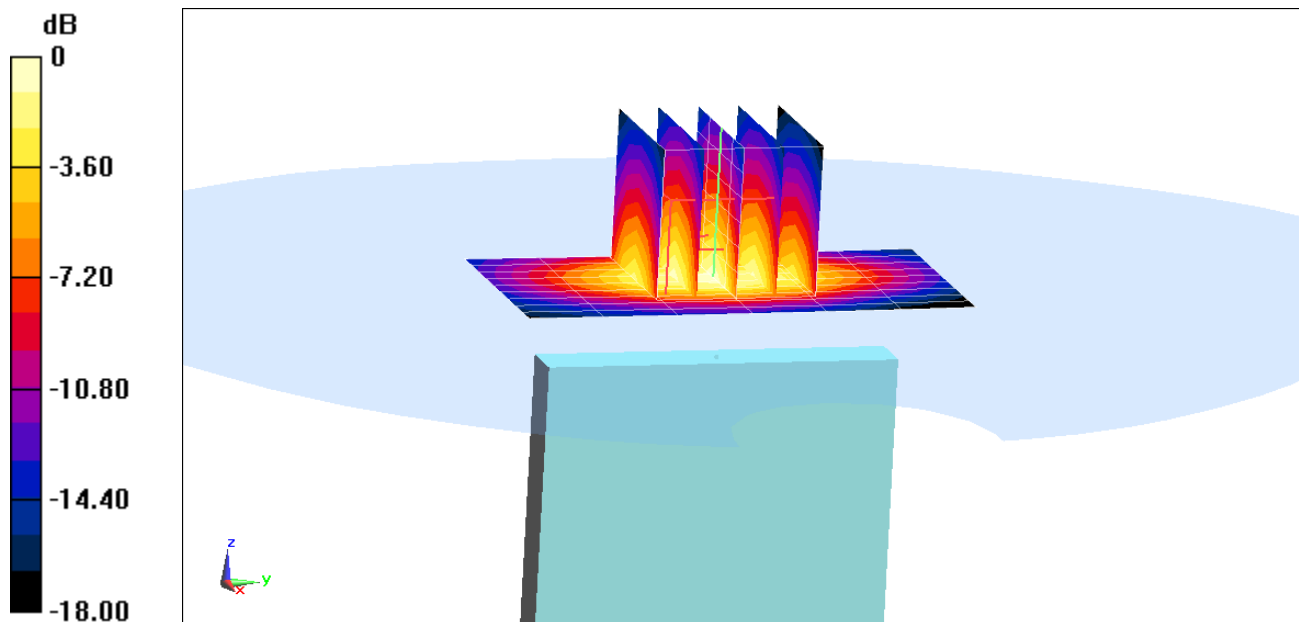

0 dB = 1.17 W/kg = 0.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: 5721B

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 2.055 \text{ S/m}$; $\epsilon_r = 51.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-16-2015; Ambient Temp: 20.7°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3351; ConvF(4.3, 4.3, 4.3); Calibrated: 6/22/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2015

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 11, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.045 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.100 W/kg

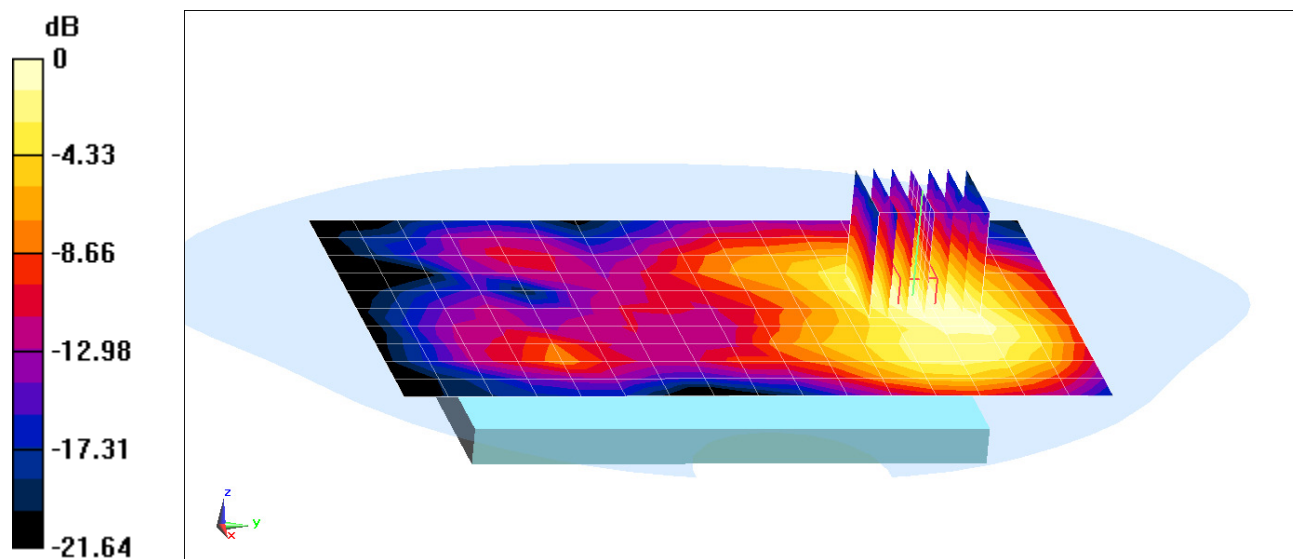

0 dB = 0.124 W/kg = -9.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: E7207

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.974 \text{ S/m}$; $\epsilon_r = 51.046$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-12-2015; Ambient Temp: 23.9°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3263; ConvF(4.28, 4.28, 4.28); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 11, 1 Mbps, Front Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.192 W/kg

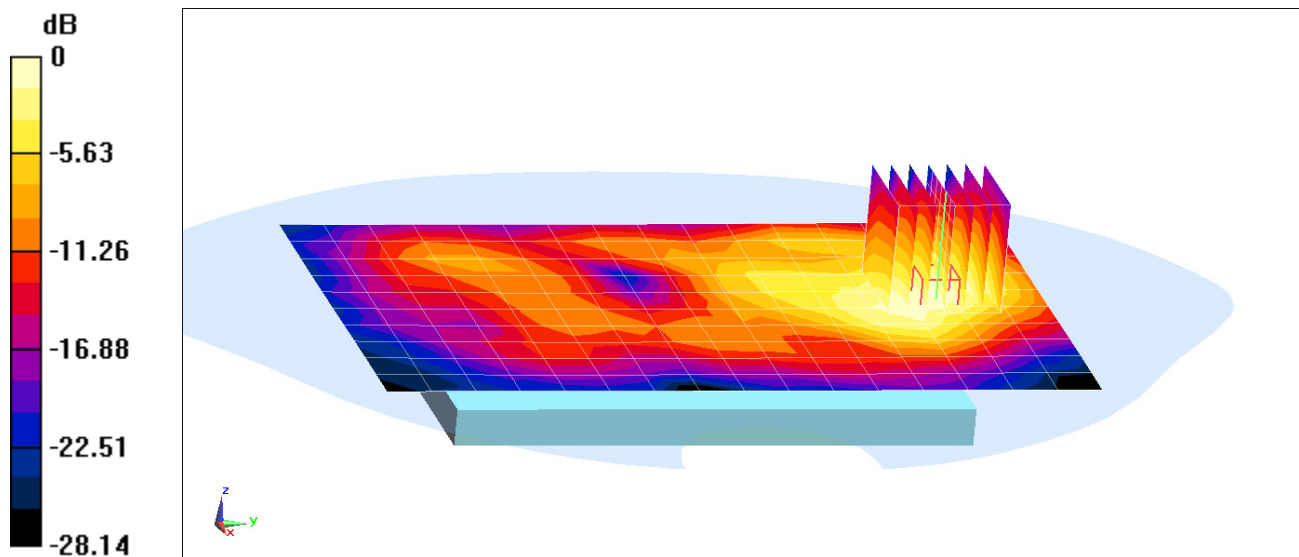

0 dB = 0.237 W/kg = -6.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: E7207

Communication System: UID 0, IEEE 802.11n; Frequency: 5310 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5310 \text{ MHz}$; $\sigma = 5.364 \text{ S/m}$; $\epsilon_r = 47.046$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.5 cm

Test Date: 11-16-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/16/2015

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, U-NII-2A, 40 MHz Bandwidth, Body SAR
Ch 62, 13.5 Mbps, Back Side**


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 2.786 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.045 W/kg

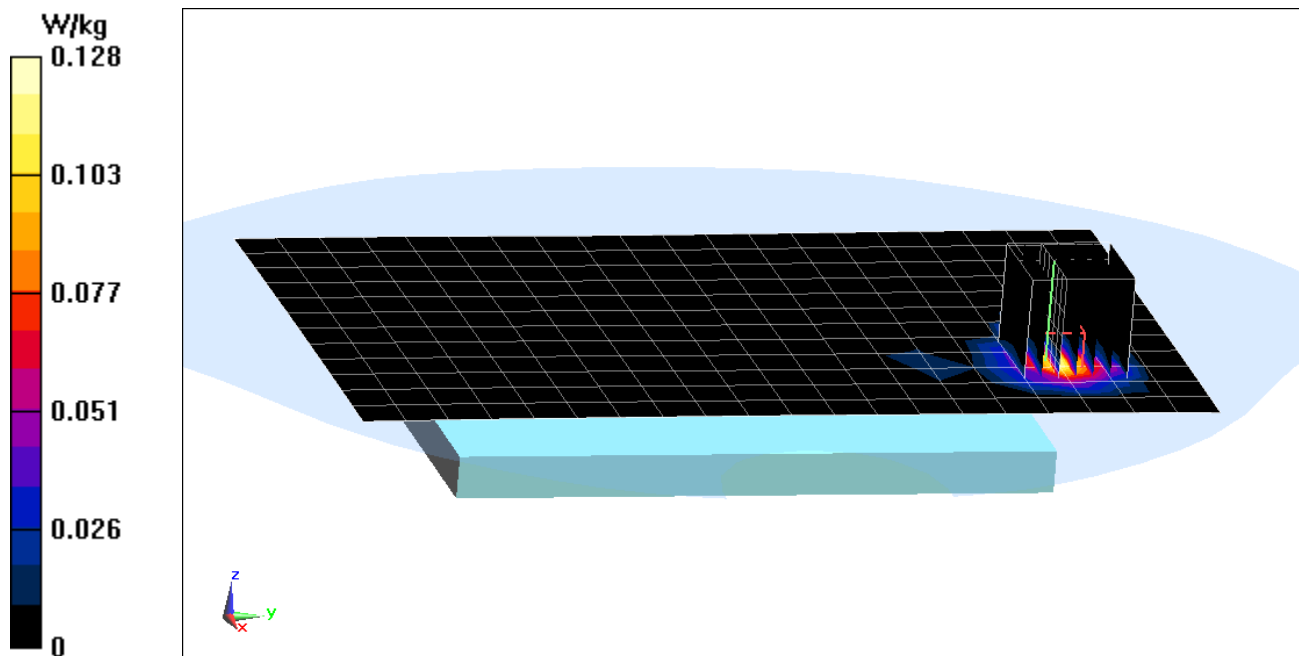

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA510M; Type: Portable Handset; Serial: E7207

Communication System: UID 0, IEEE 802.11n; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5795 \text{ MHz}$; $\sigma = 5.968 \text{ S/m}$; $\epsilon_r = 46.281$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/16/2015

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11n, U-NII-3, 40 MHz Bandwidth, Body SAR
Ch 159, 13.5 Mbps, Top Edge


Area Scan (7x15x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 3.048 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.046 W/kg

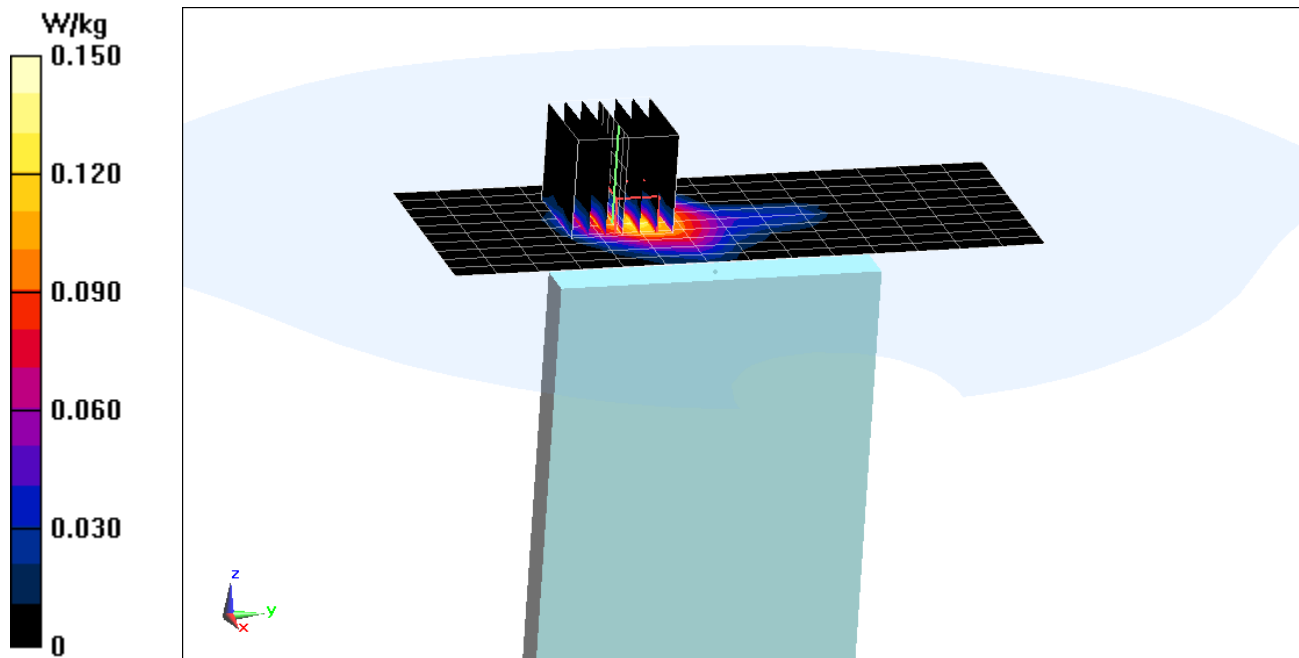

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.891 \text{ S/m}$; $\epsilon_r = 42.542$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-06-2015; Ambient Temp: 23.3°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3333; ConvF(6.46, 6.46, 6.46); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.57 W/kg

Deviation(1 g) = -2.97%

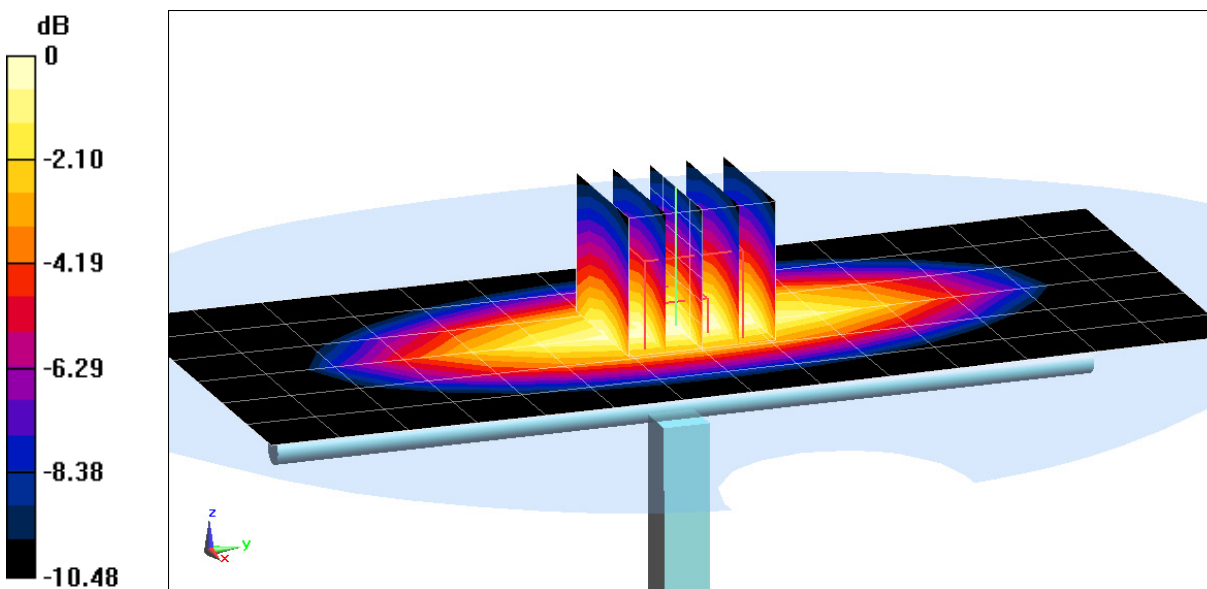

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.938 \text{ S/m}$; $\epsilon_r = 41.62$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 23.4°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/18/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2015

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.82 W/kg

SAR(1 g) = 1.89 W/kg

Deviation(1 g) = 2.16%

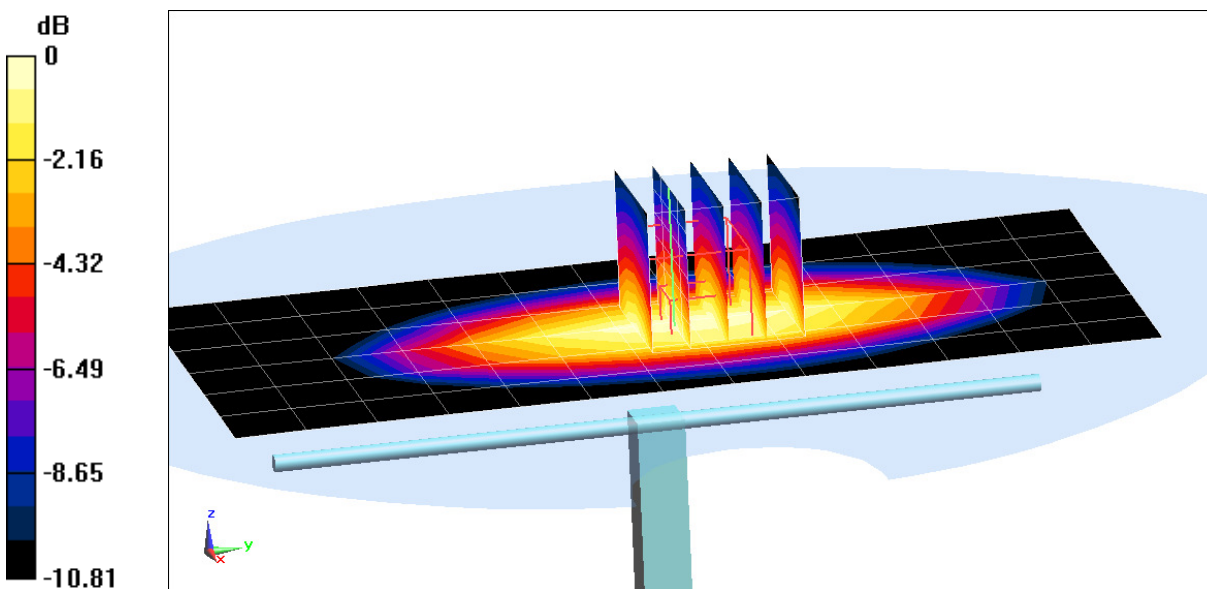

0 dB = 2.21 W/kg = 3.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.345 \text{ S/m}$; $\epsilon_r = 38.698$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-05-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3263; ConvF(5.27, 5.27, 5.27); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.89 W/kg

SAR(1 g) = 3.85 W/kg

Deviation(1 g) = 6.35 %

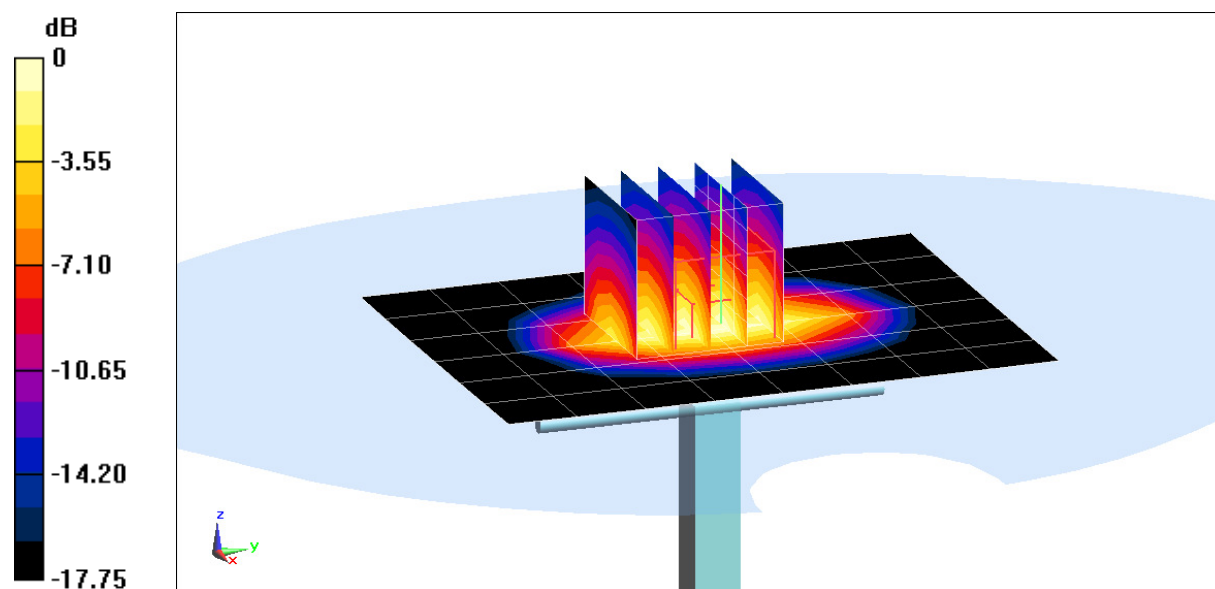

0 dB = 4.77 W/kg = 6.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.421 \text{ S/m}$; $\epsilon_r = 38.423$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-11-2015; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3333; ConvF(5.03, 5.03, 5.03); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.17 W/kg

SAR(1 g) = 3.93 W/kg

Deviation(1 g) = -3.44%%

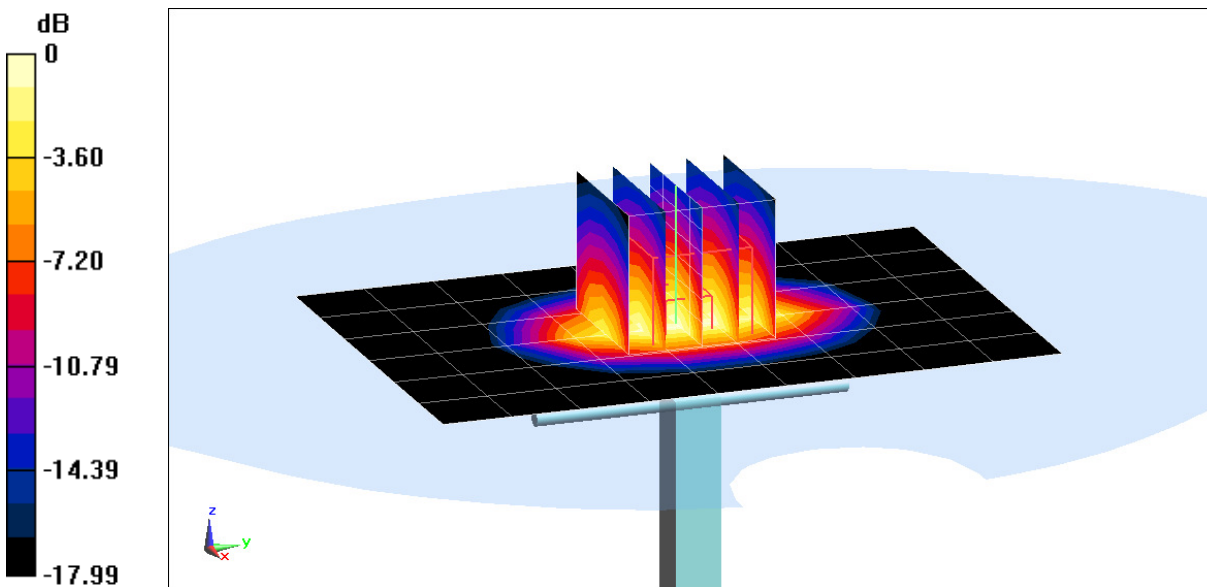

0 dB = 5.01 W/kg = 7.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.469$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3318; ConvF(4.5, 4.5, 4.5); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.40 W/kg

Deviation(1 g) = -0.37%

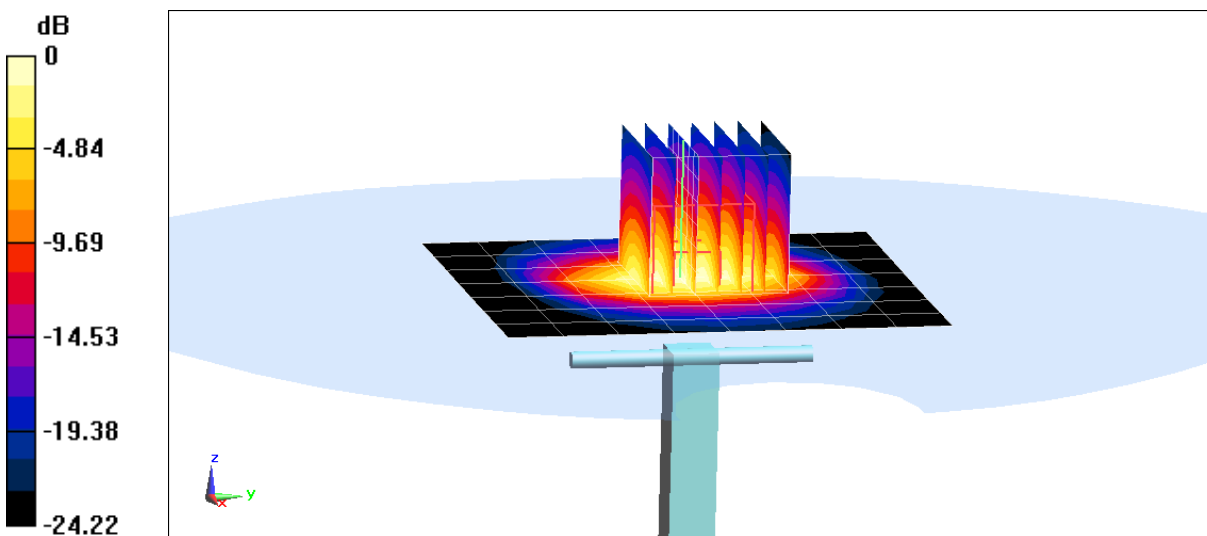

0 dB = 7.12 W/kg = 8.52 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 4.549 \text{ S/m}$; $\epsilon_r = 34.975$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification at 17 dBm (50 mW)


Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 4.15 W/kg

Deviation(1 g) = -2.01%

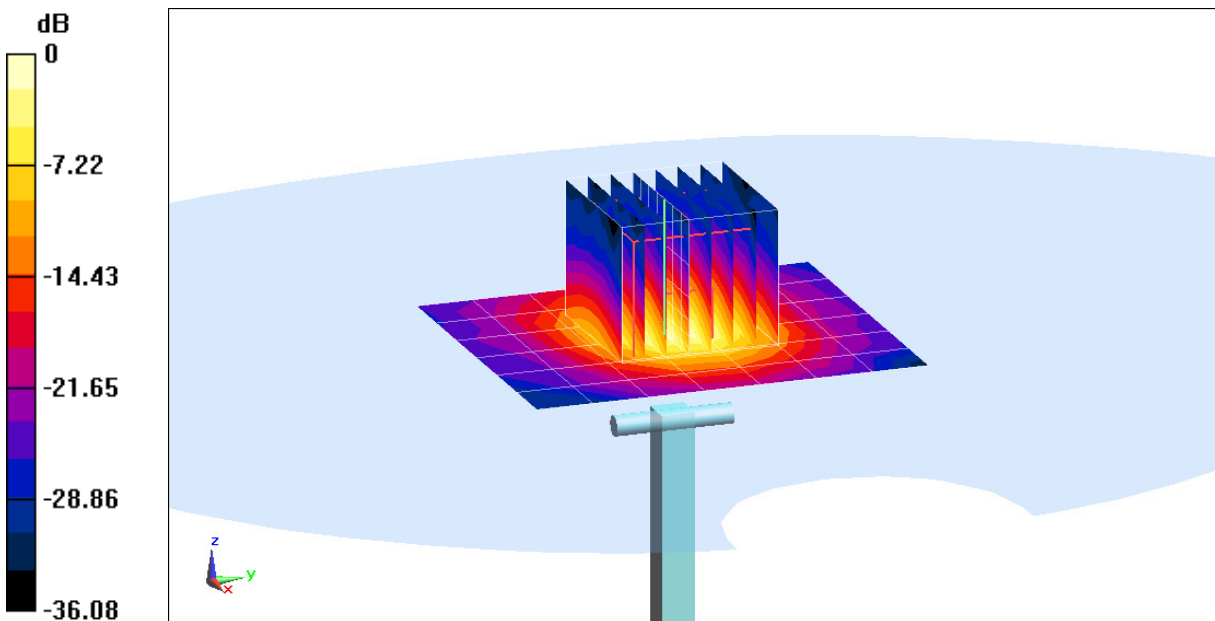

0 dB = 9.88 W/kg = 9.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 4.751 \text{ S/m}$; $\epsilon_r = 34.77$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF(4.7, 4.7, 4.7); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification at 17 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 3.92 W/kg

Deviation(1 g) = -7.00%

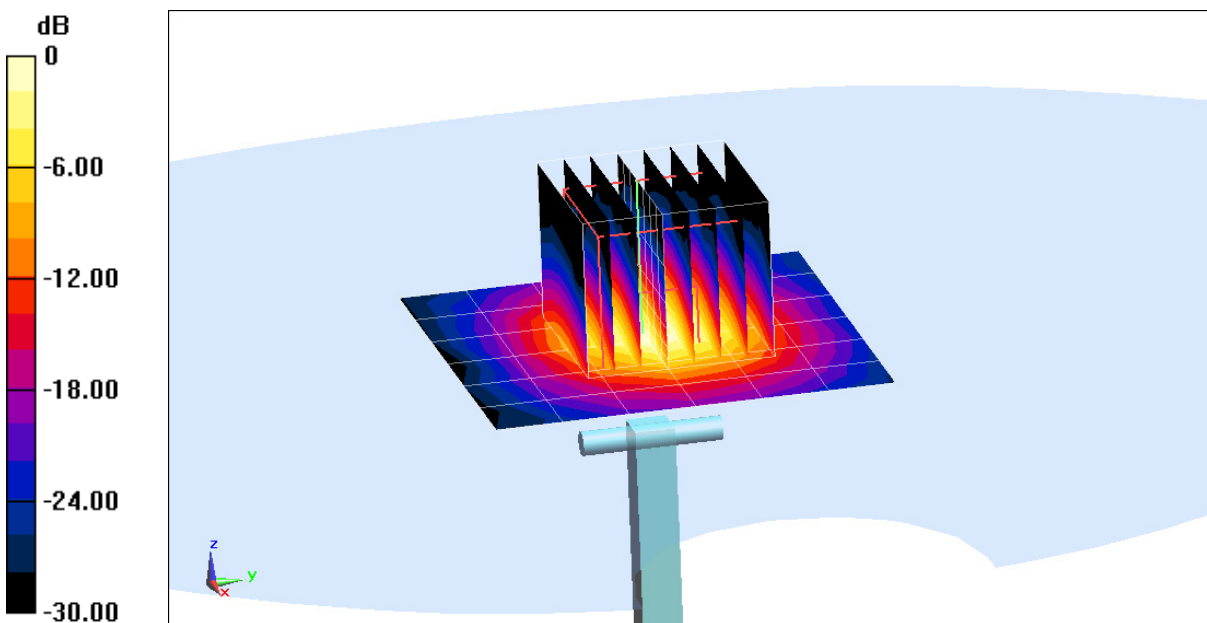

0 dB = 9.21 W/kg = 9.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.069 \text{ S/m}$; $\epsilon_r = 34.405$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7357; ConvF(4.41, 4.41, 4.41); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification at 17 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio = 1.4

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.87 W/kg

Deviation(1 g) = -4.56%

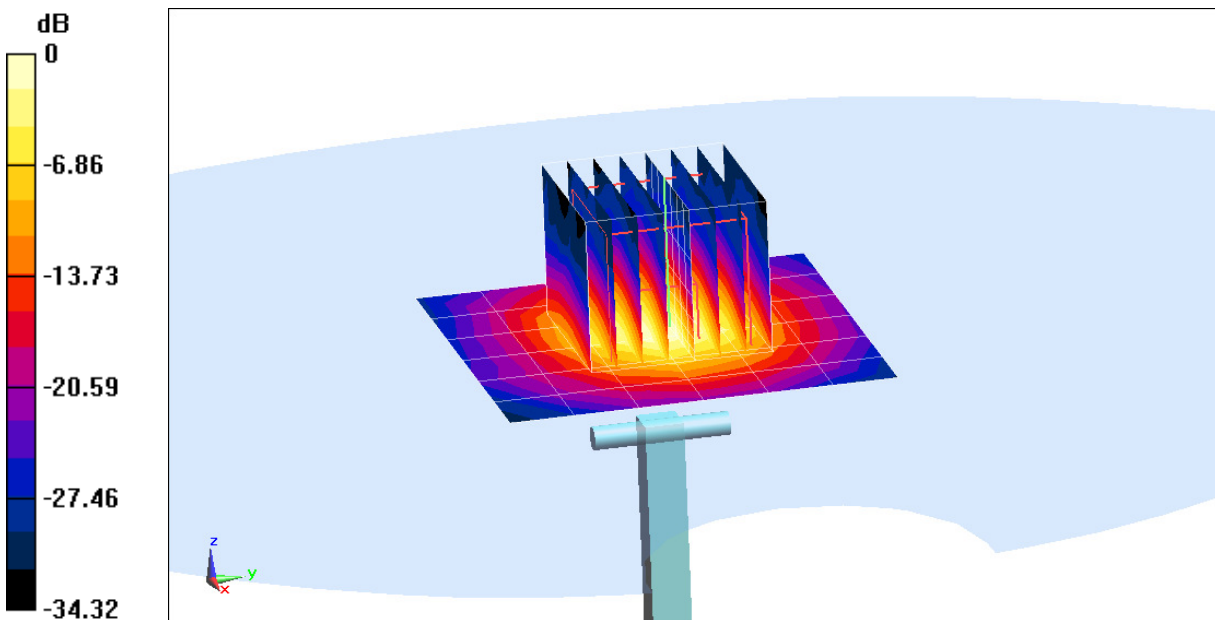

0 dB = 9.71 W/kg = 9.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 54.106$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-11-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.07, 6.07, 6.07); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.75 W/kg

Deviation(1 g) = 3.43%

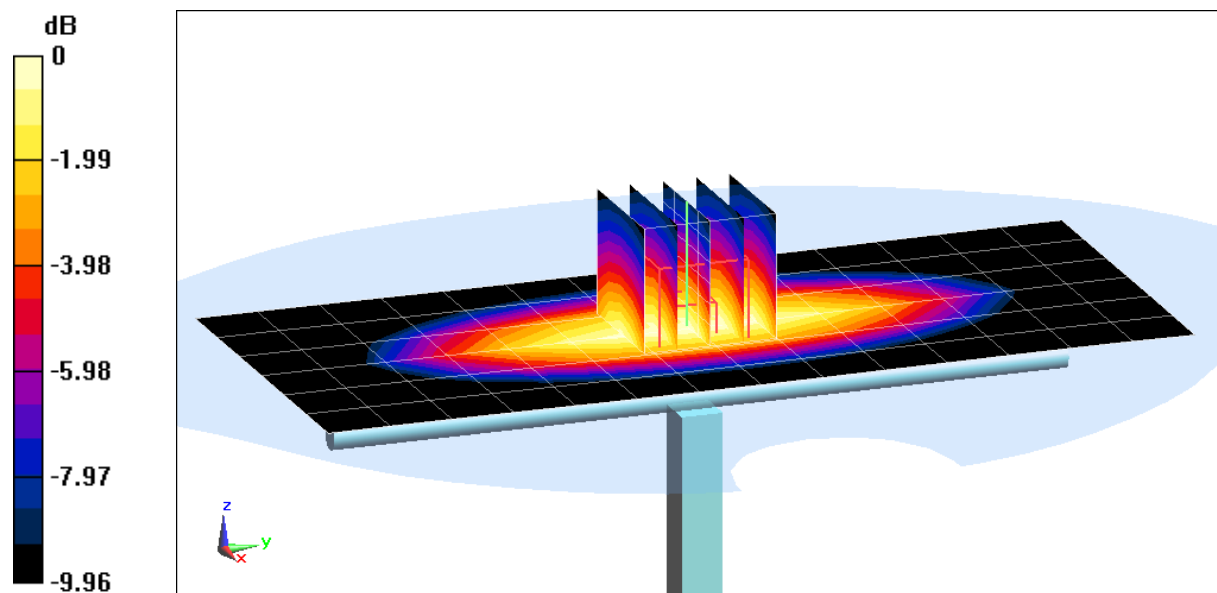

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 54.116$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-09-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3263; ConvF(6.08, 6.08, 6.08); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.84 W/kg

Deviation(1 g) = 0.00%

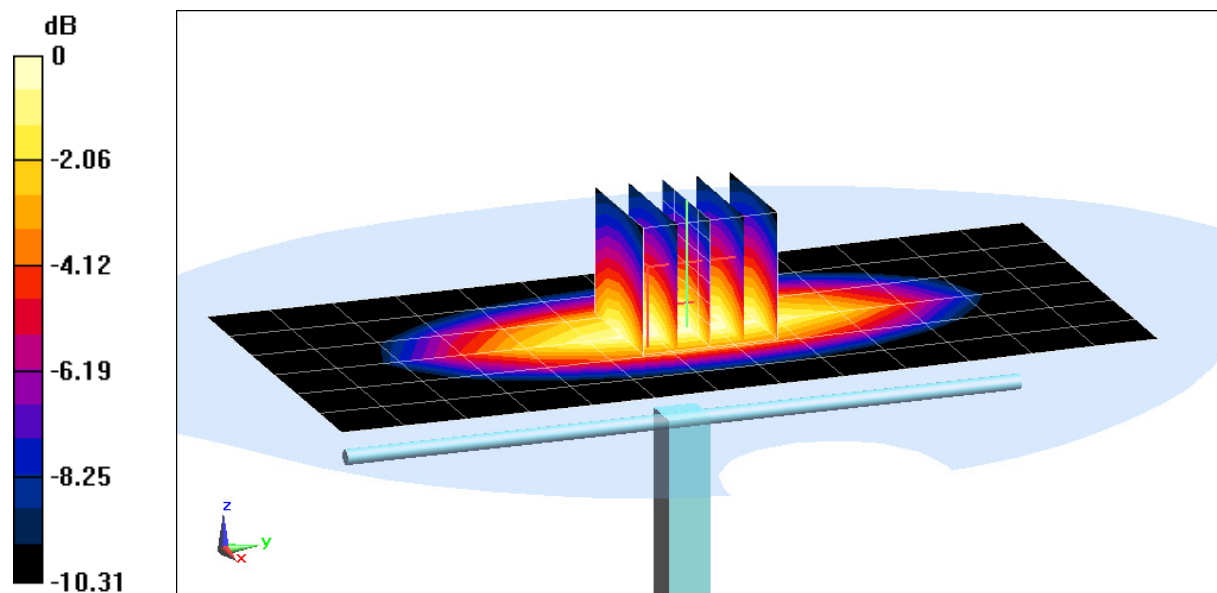

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.498$ S/m; $\epsilon_r = 51.383$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-07-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3263; ConvF(4.88, 4.88, 4.88); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.70 W/kg

SAR(1 g) = 3.90 W/kg

Deviation(1 g) = 5.12%

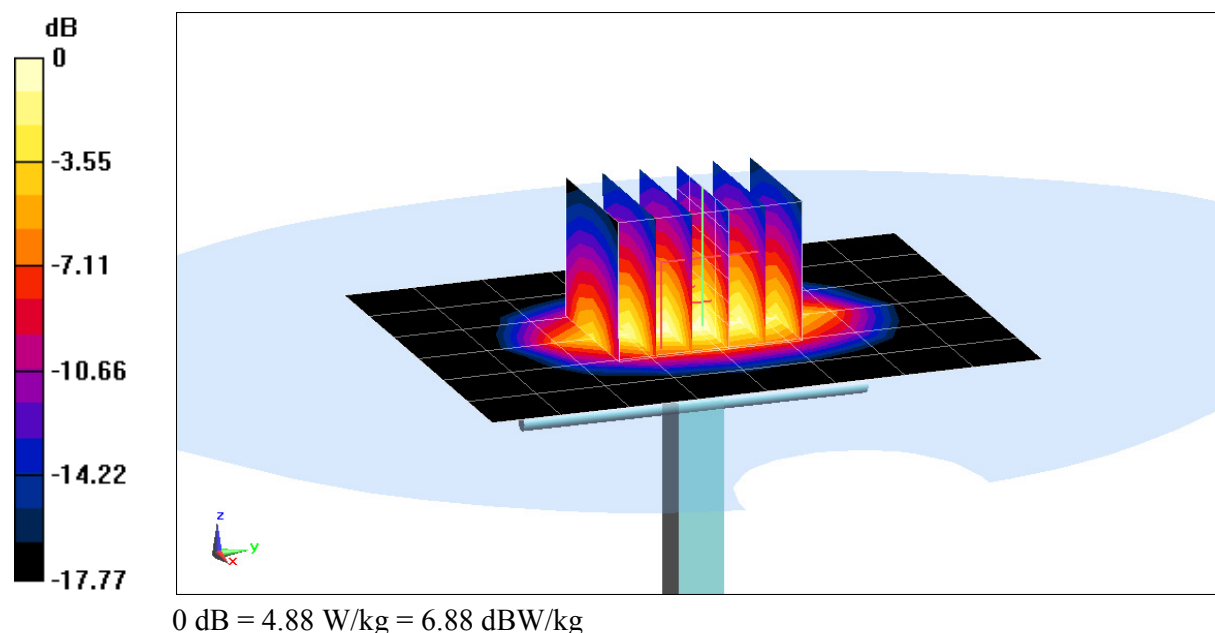

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.539 \text{ S/m}$; $\epsilon_r = 51.645$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-09-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3333; ConvF(4.7, 4.7, 4.7); Calibrated: 10/29/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/27/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.29 W/kg

SAR(1 g) = 4.06 W/kg

Deviation(1 g) = 0.50%

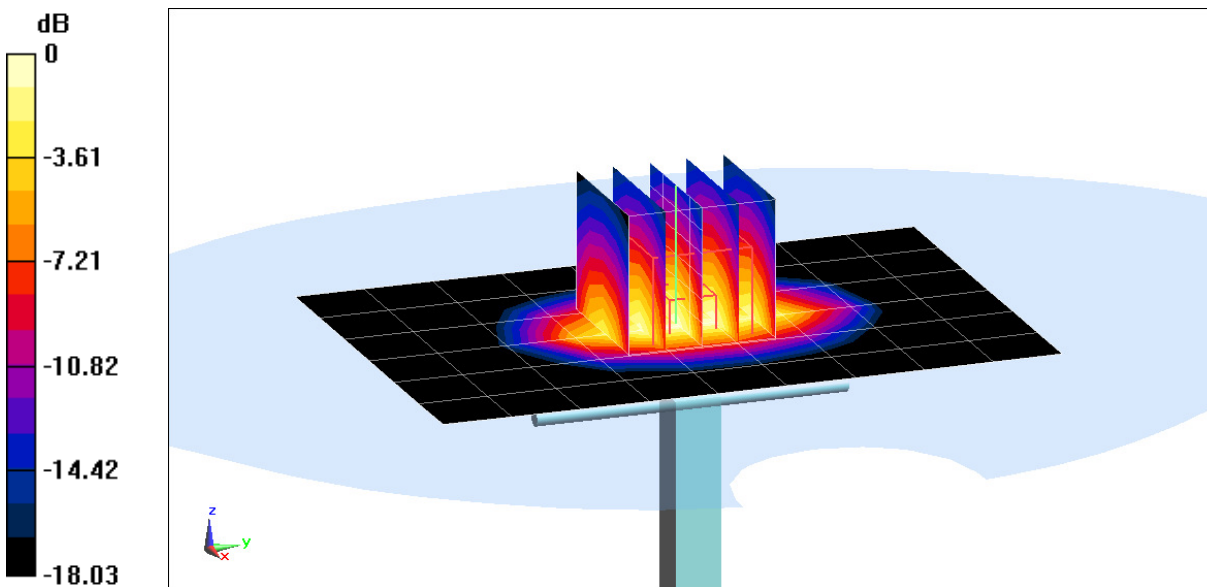

0 dB = 5.12 W/kg = 7.09 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d141

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.21$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space = 1.0 cm

Test Date: 11/11/2015; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: ES3DV2 - SN3022; ConvF(4.56, 4.56, 4.56); Calibrated: 8/26/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.97 W/kg

SAR(1 g) = 4.00 W/kg

Deviation(1 g) = 0.00%

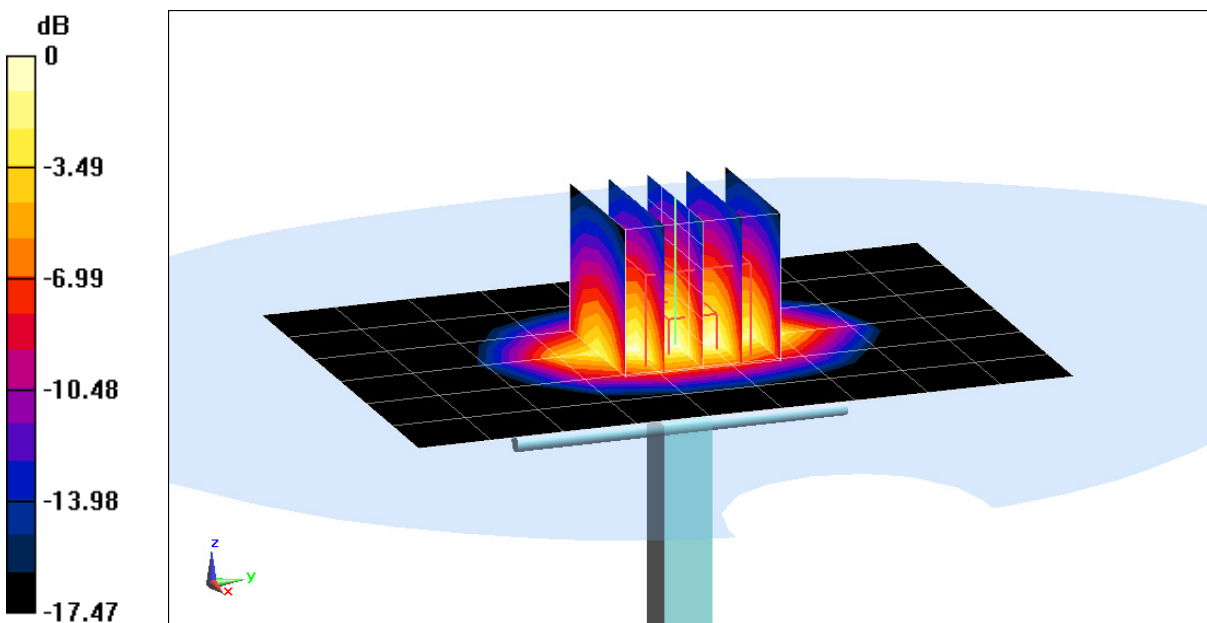

0 dB = 5.01 W/kg = 7.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.958 \text{ S/m}$; $\epsilon_r = 51.088$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2015; Ambient Temp: 23.9°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3263; ConvF(4.28, 4.28, 4.28); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 6/17/2015

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.03 W/kg

Deviation(1 g) = -3.08%

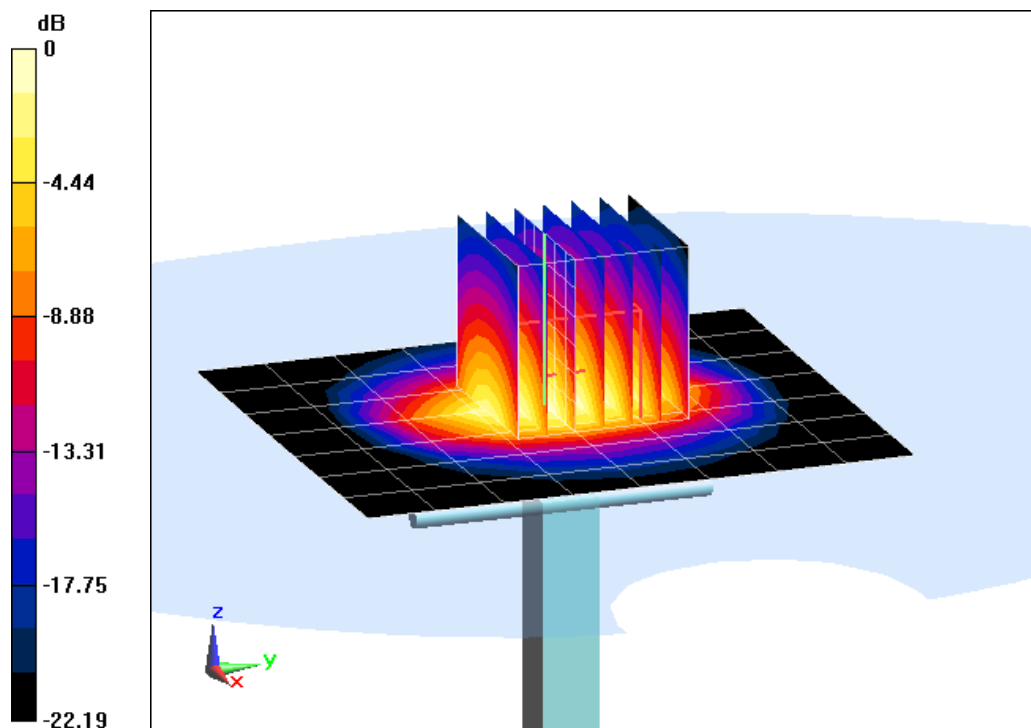

0 dB = 6.57 W/kg = 8.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.039 \text{ S/m}$; $\epsilon_r = 51.134$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 20.7°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3351; ConvF(4.3, 4.3, 4.3); Calibrated: 6/22/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2015

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 4.90 W/kg

Deviation(1 g) = -4.85%

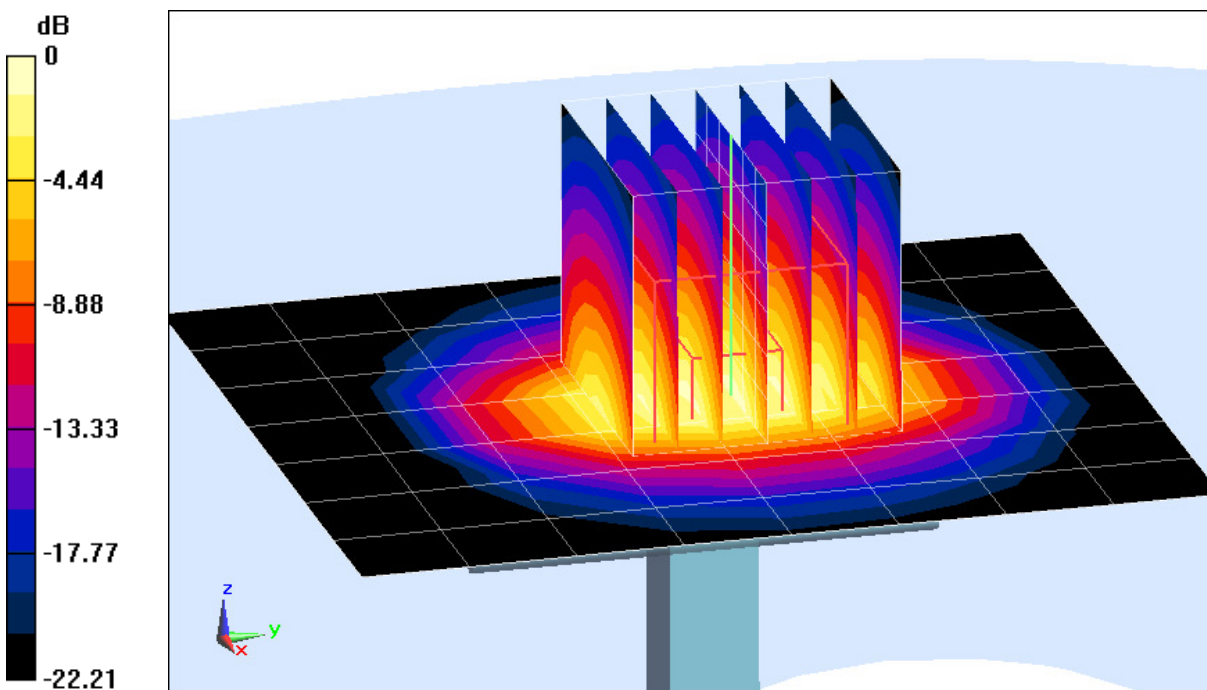

0 dB = 6.47 W/kg = 8.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.351 \text{ S/m}$; $\epsilon_r = 47.063$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/16/2015

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.90 W/kg

Deviation(1 g) = 3.72%

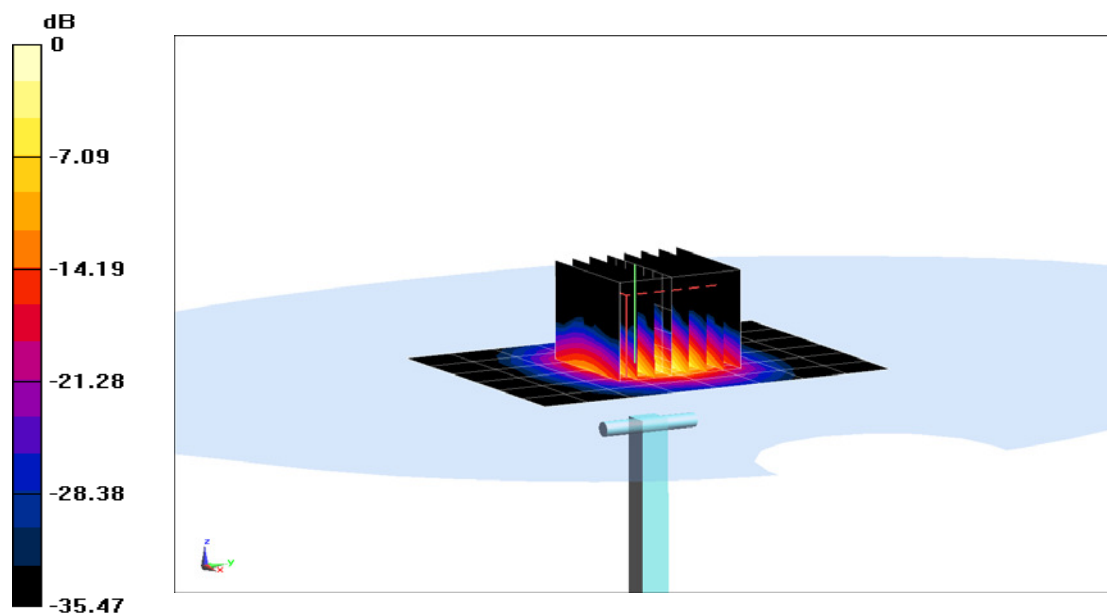

0 dB = 10.1 W/kg = 10.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5500$ MHz; $\sigma = 5.618$ S/m; $\epsilon_r = 46.813$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3914; ConvF(3.91, 3.91, 3.91); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/16/2015

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 4.05 W/kg

Deviation(1 g) = 1.89%

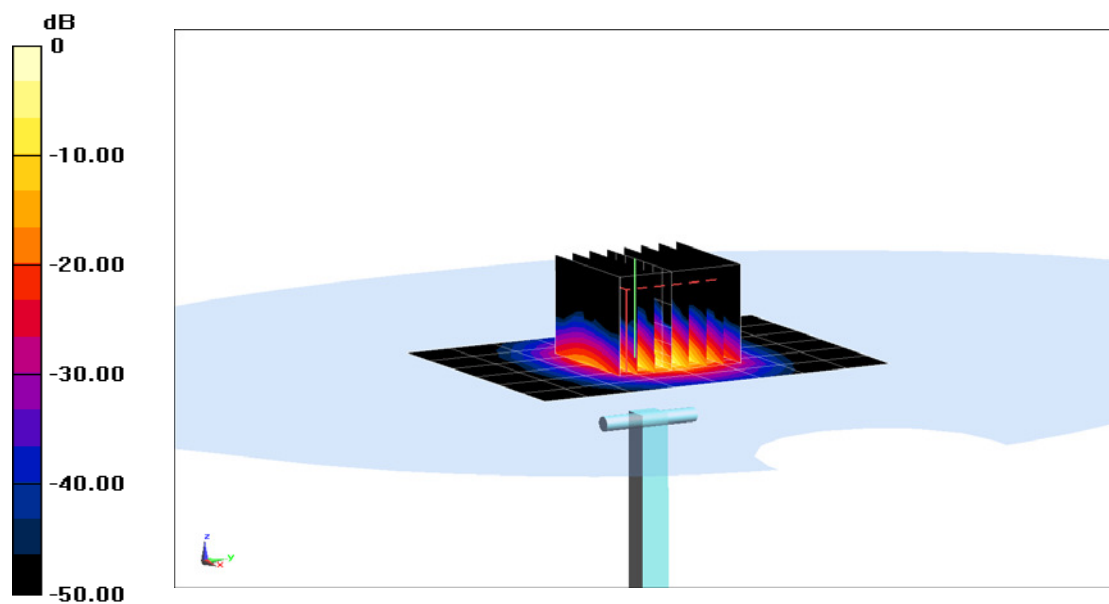

0 dB = 10.8 W/kg = 10.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.975 \text{ S/m}$; $\epsilon_r = 46.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-16-2015; Ambient Temp: 21.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/16/2015

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.78 W/kg

Deviation(1 g) = -0.92%

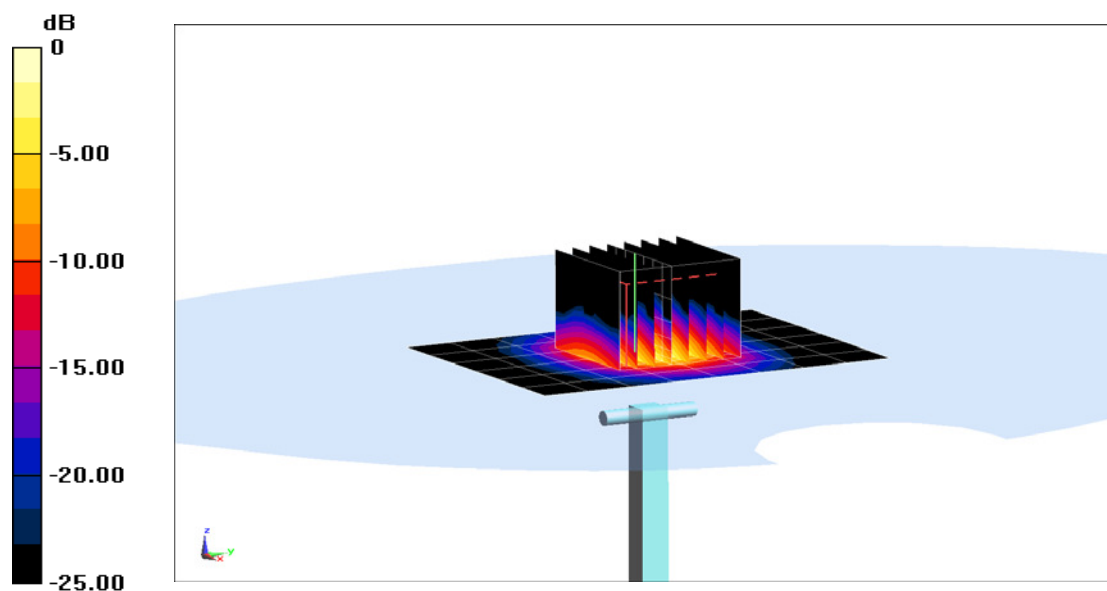

0 dB = 9.77 W/kg = 9.90 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **ES3-3333_Oct15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3333**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

*DN ✓
14/03/15*

Calibration date: **October 29, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (In house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Lutz Klysner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Issued: October 29, 2015



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865604, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3333

Manufactured: January 24, 2012
Calibrated: October 29, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.07	0.90	0.88	$\pm 10.1 \%$
DCP (mV) ^B	106.8	108.5	106.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	201.0	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		187.1	
		Z	0.0	0.0	1.0		184.8	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.43	80.7	11.4	10.00	41.6	$\pm 2.2 \%$
		Y	4.35	67.4	13.2		35.6	
		Z	1.46	57.0	8.7		36.2	
10011- CAB	UMTS-FDD (WCDMA)	X	3.35	67.9	19.1	2.91	138.2	$\pm 0.5 \%$
		Y	3.48	68.8	19.2		127.5	
		Z	3.37	67.6	18.6		149.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	3.80	72.8	20.8	1.87	141.0	$\pm 0.7 \%$
		Y	3.68	73.3	20.8		128.0	
		Z	3.01	69.3	18.8		128.2	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	11.52	71.7	23.9	9.46	139.3	$\pm 3.0 \%$
		Y	10.94	70.4	22.9		147.1	
		Z	10.95	70.8	23.4		144.5	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	21.45	95.2	26.5	9.39	139.9	$\pm 2.5 \%$
		Y	9.12	82.9	21.9		142.0	
		Z	11.47	88.1	23.9		127.6	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	20.81	95.6	27.0	9.57	135.8	$\pm 2.2 \%$
		Y	9.78	84.4	22.7		135.3	
		Z	9.12	83.5	22.1		144.6	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	39.84	99.8	25.2	6.56	140.9	$\pm 1.9 \%$
		Y	35.07	100.0	25.0		128.4	
		Z	35.20	99.8	24.7		131.9	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	47.16	99.8	23.9	4.80	124.9	$\pm 2.5 \%$
		Y	49.75	99.6	22.8		145.4	
		Z	45.37	99.9	23.1		148.5	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	56.24	99.6	22.6	3.55	140.4	$\pm 2.7 \%$
		Y	56.95	99.7	21.9		129.1	
		Z	48.45	99.6	22.1		133.2	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	18.03	98.1	22.8	1.16	127.5	$\pm 1.9 \%$
		Y	35.17	99.6	20.7		141.1	
		Z	21.08	99.9	21.9		127.5	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.36	87.6	19.8	5.67	137.5	$\pm 1.2 \%$
		Y	6.29	87.4	19.6		128.9	
		Z	6.35	87.5	19.7		139.5	

10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	10.85	76.6	28.4	9.29	130.8	±2.7 %
		Y	9.58	73.7	24.8		143.0	
		Z	9.94	75.6	26.2		149.3	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.21	67.0	19.7	5.80	128.9	±1.2 %
		Y	6.16	66.9	19.5		129.2	
		Z	6.22	67.2	19.7		138.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.05	68.7	21.2	8.07	126.1	±2.5 %
		Y	10.13	69.0	21.3		146.1	
		Z	9.97	68.7	21.1		126.2	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	10.11	75.5	26.0	9.28	125.8	±3.3 %
		Y	9.08	73.2	24.7		138.2	
		Z	9.32	74.8	26.0		143.1	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	5.97	66.8	19.6	5.75	133.4	±1.2 %
		Y	5.92	66.7	19.5		127.0	
		Z	5.91	68.7	19.5		134.2	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.40	67.3	19.9	5.82	137.8	±1.2 %
		Y	6.31	67.1	19.6		130.7	
		Z	6.32	67.1	19.8		139.8	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.05	67.3	20.1	5.73	136.8	±1.2 %
		Y	4.89	67.0	19.9		131.1	
		Z	4.93	67.2	20.0		137.4	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	10.74	83.9	30.3	9.21	136.8	±2.7 %
		Y	7.34	74.3	25.5		125.9	
		Z	7.74	76.6	27.1		131.2	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.97	66.9	19.9	5.72	130.8	±1.2 %
		Y	4.86	66.9	19.8		128.5	
		Z	4.97	67.3	20.1		137.0	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.99	67.0	19.9	5.72	130.1	±1.2 %
		Y	4.88	67.0	19.9		127.6	
		Z	4.95	67.2	20.0		136.2	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	10.00	69.2	21.7	8.10	137.9	±2.2 %
		Y	9.75	68.7	21.2		137.5	
		Z	9.94	69.4	21.7		145.3	
10225-CAB	UMTS-FDD (HSPA+)	X	7.08	67.5	19.8	5.97	147.1	±1.4 %
		Y	7.06	67.7	19.8		142.3	
		Z	7.04	67.7	19.9		148.8	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	10.66	83.5	30.1	9.21	144.0	±3.0 %
		Y	7.43	74.7	25.7		127.6	
		Z	7.86	77.1	27.4		132.3	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	10.81	78.7	27.9	9.24	139.7	±3.0 %
		Y	8.48	72.4	24.4		130.1	
		Z	8.71	74.1	25.8		135.2	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	11.73	79.9	28.3	9.30	148.6	±3.3 %
		Y	9.11	73.2	24.8		139.0	
		Z	9.38	74.9	26.1		142.7	

10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Ref8.4)	X	4.52	67.6	19.3	3.96	144.5	±0.7 %
		Y	4.67	68.3	19.6		146.0	
		Z	4.41	67.0	18.9		130.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	3.66	67.2	19.0	3.46	134.5	±0.5 %
		Y	3.91	68.9	19.9		133.2	
		Z	3.86	68.5	19.6		146.9	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	3.63	67.5	19.1	3.39	134.9	±0.5 %
		Y	3.93	69.3	20.0		136.0	
		Z	3.81	68.5	19.6		148.6	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.20	67.1	19.7	5.81	129.0	±1.2 %
		Y	6.20	67.0	19.6		128.0	
		Z	6.32	67.5	19.9		142.7	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.76	67.6	20.0	6.06	134.7	±1.4 %
		Y	6.75	67.5	19.9		133.5	
		Z	6.90	68.1	20.3		149.2	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	10.30	69.7	22.1	8.37	140.1	±2.5 %
		Y	10.05	69.0	21.5		141.2	
		Z	9.94	69.0	21.7		126.3	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.80	68.5	19.0	3.76	129.3	±0.5 %
		Y	5.30	71.1	20.2		148.4	
		Z	5.10	70.4	19.9		135.2	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.77	68.8	19.2	3.77	127.3	±0.7 %
		Y	5.35	71.7	20.5		145.4	
		Z	5.03	70.6	20.1		133.3	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.77	69.7	19.7	1.54	147.0	±0.7 %
		Y	3.73	75.4	22.2		143.7	
		Z	3.25	72.2	20.7		133.9	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 8 Mbps, 99pc duty cycle)	X	10.11	69.4	21.8	8.23	144.7	±2.5 %
		Y	9.86	68.8	21.4		139.3	
		Z	9.72	68.6	21.3		126.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 7 and 8).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Calibration Parameter Determined In Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	6.46	6.46	6.46	0.75	1.22	± 12.0 %
835	41.5	0.90	6.16	6.16	6.16	0.36	1.67	± 12.0 %
1750	40.1	1.37	5.21	5.21	5.21	0.80	1.19	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.73	1.25	± 12.0 %
2300	39.5	1.67	4.73	4.73	4.73	0.60	1.43	± 12.0 %
2450	39.2	1.80	4.53	4.53	4.53	0.80	1.28	± 12.0 %
2600	39.0	1.96	4.39	4.39	4.39	0.80	1.29	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth (mm)	Unc (k=2)
750	55.5	0.98	6.31	6.31	6.31	0.70	1.26	± 12.0 %
835	55.2	0.97	6.25	6.25	6.25	0.47	1.54	± 12.0 %
1750	53.4	1.49	4.90	4.90	4.90	0.49	1.63	± 12.0 %
1900	53.3	1.52	4.70	4.70	4.70	0.54	1.49	± 12.0 %
2300	52.9	1.81	4.51	4.51	4.51	0.80	1.15	± 12.0 %
2450	52.7	1.95	4.34	4.34	4.34	0.80	1.15	± 12.0 %
2600	52.5	2.16	4.23	4.23	4.23	0.80	1.03	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 160 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

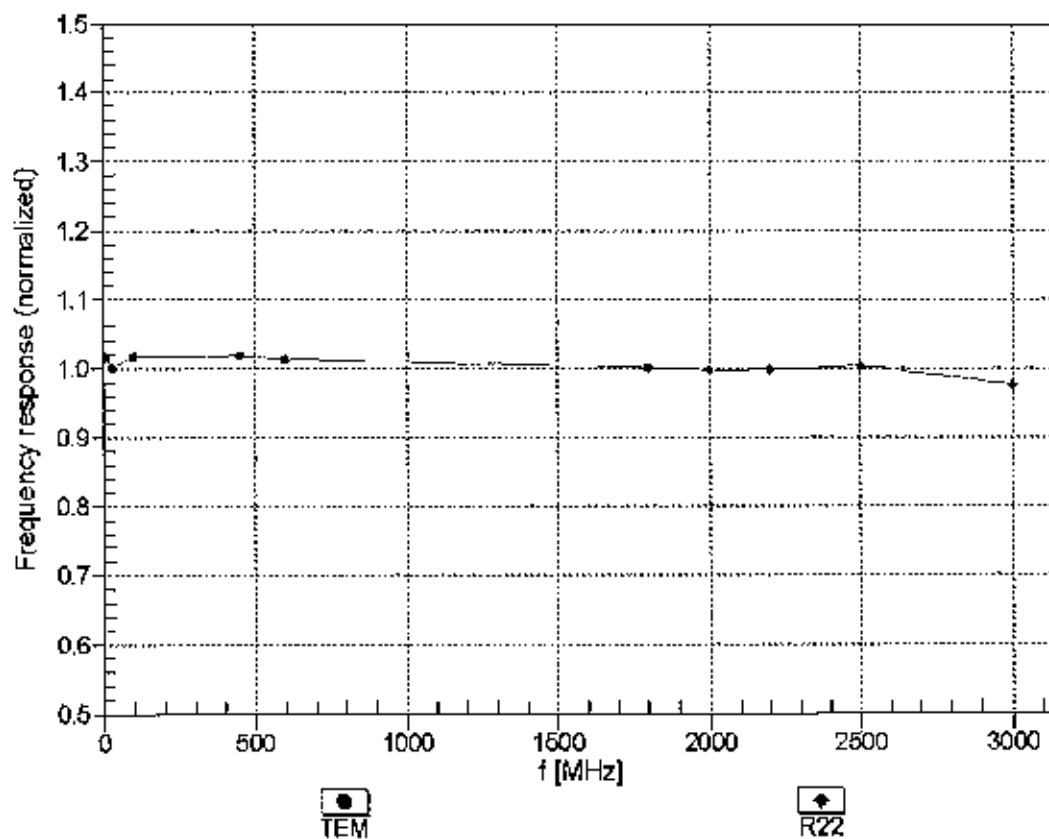



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM

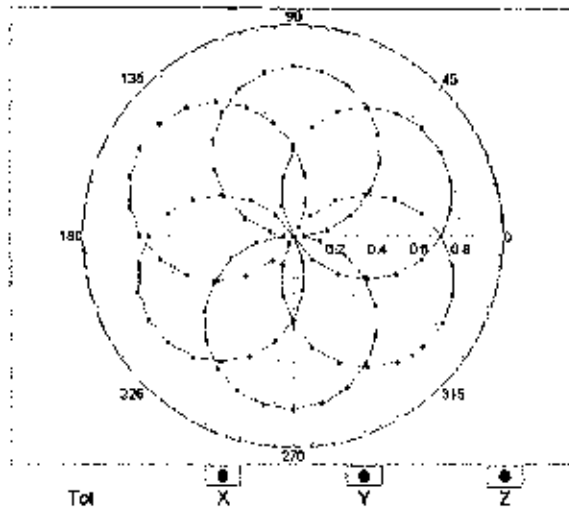


f=1800 MHz,R22

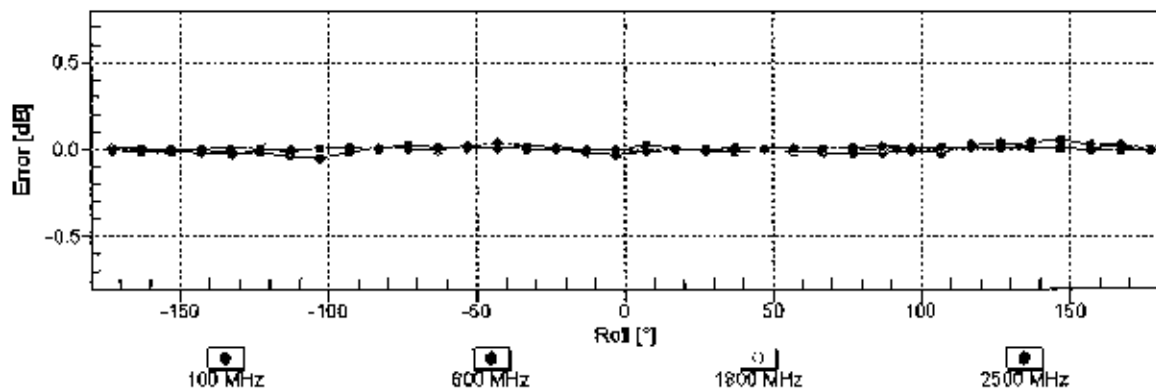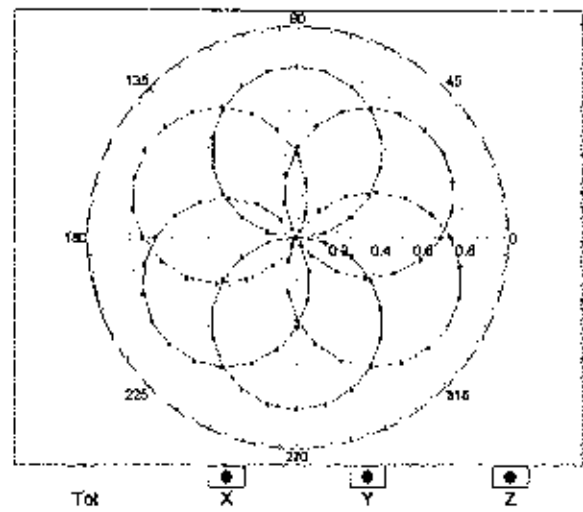


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ **(TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)**

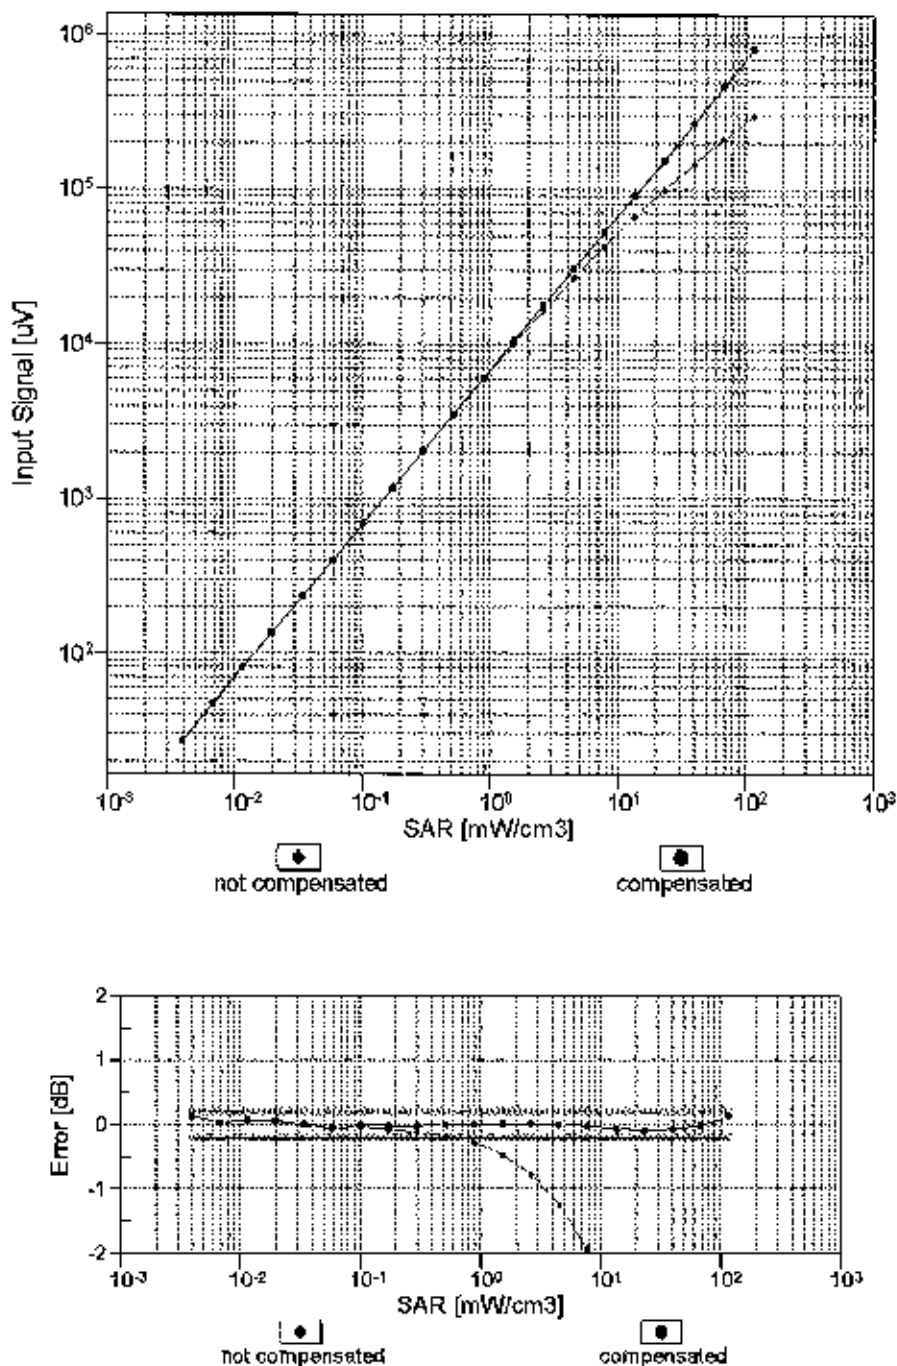


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

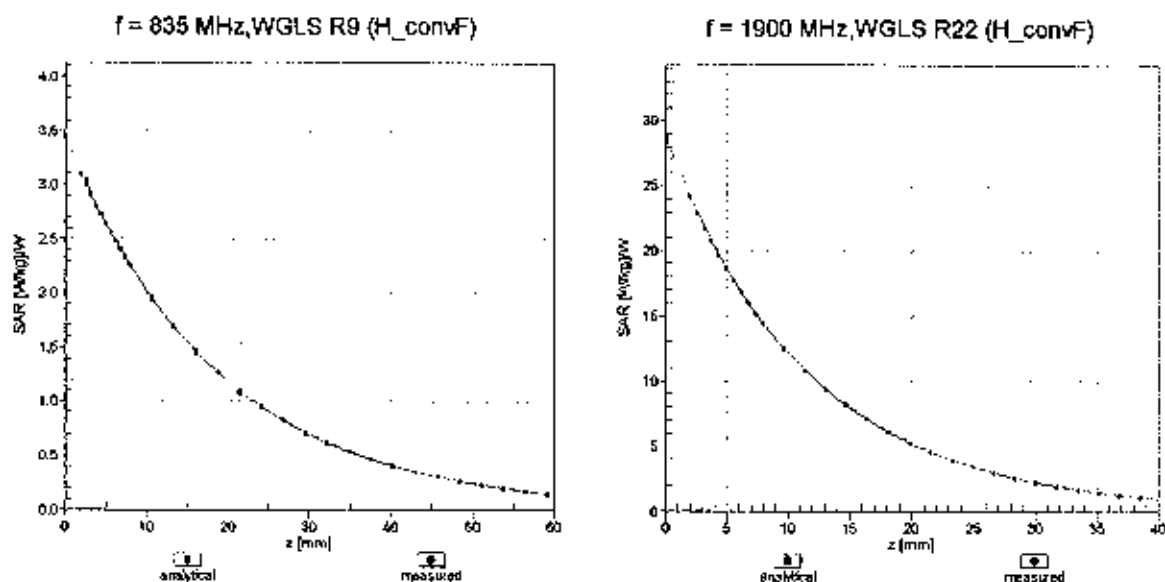

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

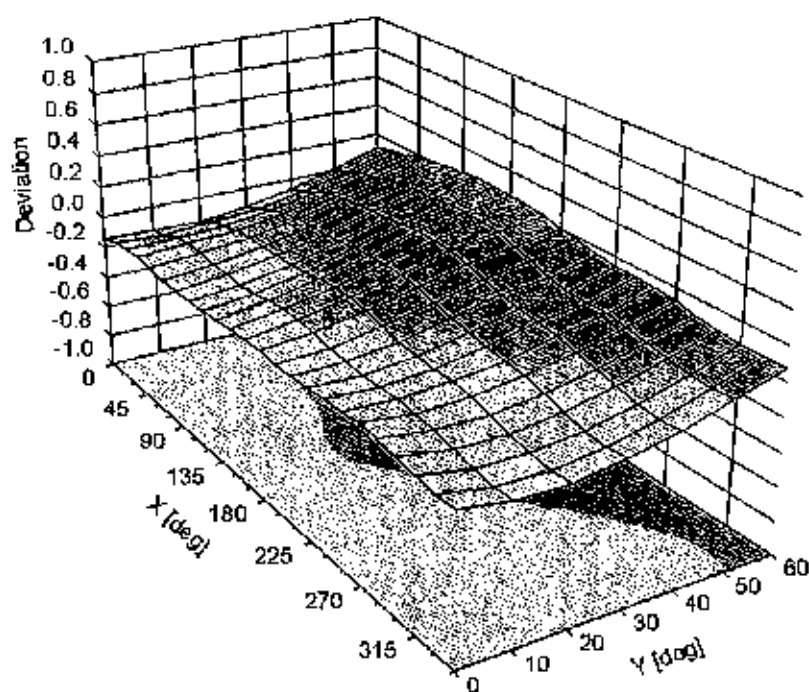

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-32.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3288_Sep15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3288**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dipolemic E-field probes

BN ✓
10/02/15

Calibration date: **September 18, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 560	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Issued: September 19, 2015



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3288

Manufactured: July 6, 2010
Calibrated: September 18, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.05	1.16	0.92	$\pm 10.1 \%$
DCP (mV) ^B	106.9	106.9	107.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X	0.0	0.0	1.0	0.00	190.7	$\pm 3.0 \%$
		Y	0.0	0.0	1.0		181.4	
		Z	0.0	0.0	1.0		179.1	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.56	61.8	10.9	10.00	38.0	$\pm 1.2 \%$
		Y	99.34	97.0	21.5		36.6	
		Z	6.26	70.5	13.9		36.2	
10011- CAB	UMTS-FDD (WCDMA)	X	3.28	67.4	18.7	2.91	129.4	$\pm 0.5 \%$
		Y	3.60	69.3	19.8		143.8	
		Z	3.38	67.9	18.8		143.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	3.07	70.1	19.4	1.87	131.0	$\pm 0.7 \%$
		Y	3.79	74.2	21.4		145.4	
		Z	3.15	70.5	19.4		144.5	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	10.64	69.8	22.8	9.46	122.7	$\pm 2.7 \%$
		Y	10.89	70.2	22.9		140.0	
		Z	10.70	70.2	23.0		136.7	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	10.49	86.3	22.8	9.39	138.5	$\pm 2.2 \%$
		Y	13.76	90.7	24.6		145.7	
		Z	7.99	82.4	21.3		141.8	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	9.73	85.3	22.7	9.57	149.4	$\pm 2.7 \%$
		Y	9.12	84.3	22.7		131.8	
		Z	8.21	83.4	22.1		134.8	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	34.75	99.7	24.5	6.56	135.8	$\pm 2.5 \%$
		Y	22.21	94.5	23.5		148.5	
		Z	8.93	81.8	18.8		148.3	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	51.22	100.0	22.6	4.80	132.9	$\pm 1.9 \%$
		Y	45.95	99.6	23.0		139.7	
		Z	14.90	87.0	19.2		138.0	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	56.25	99.8	21.6	3.55	141.8	$\pm 1.9 \%$
		Y	61.05	99.6	21.6		149.8	
		Z	70.48	99.7	20.8		126.6	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	98.24	98.4	18.0	1.16	135.4	$\pm 1.9 \%$
		Y	71.59	99.7	19.3		144.2	
		Z	98.96	91.6	15.1		148.2	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.44	67.9	19.9	5.67	148.9	$\pm 1.4 \%$
		Y	6.27	67.2	19.6		131.4	
		Z	6.28	67.3	19.5		137.9	

10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	9.52	74.2	25.3	9.29	134.3	±2.5 %
		Y	9.97	75.1	25.7		146.8	
		Z	9.47	74.4	25.4		147.4	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.31	67.5	19.8	5.80	147.4	±1.4 %
		Y	6.21	67.1	19.6		131.0	
		Z	6.16	67.0	19.5		136.4	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.11	68.9	21.2	8.07	137.9	±2.2 %
		Y	10.26	69.3	21.5		147.7	
		Z	9.85	68.3	20.9		126.0	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.90	73.2	25.0	9.28	129.8	±3.3 %
		Y	9.32	74.0	25.2		142.5	
		Z	8.86	73.4	25.1		142.1	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	5.98	66.9	19.6	5.75	143.7	±1.2 %
		Y	5.91	66.6	19.4		128.0	
		Z	5.84	66.5	19.3		133.4	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.43	67.5	19.8	5.82	148.9	±1.4 %
		Y	6.31	67.0	19.6		132.2	
		Z	6.30	67.1	19.5		138.0	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.93	67.3	20.0	5.73	145.7	±1.2 %
		Y	4.89	66.9	19.8		131.7	
		Z	4.82	66.9	19.7		134.9	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	7.96	77.5	27.4	9.21	143.6	±2.7 %
		Y	7.61	75.5	26.3		129.2	
		Z	7.10	74.5	25.9		129.7	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.89	67.1	19.9	5.72	138.9	±1.2 %
		Y	5.02	67.5	20.1		148.1	
		Z	4.77	66.7	19.6		129.3	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.93	67.3	20.0	5.72	143.8	±1.2 %
		Y	5.08	67.8	20.3		149.0	
		Z	4.73	66.5	19.5		129.4	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.73	68.7	21.3	8.10	130.0	±1.9 %
		Y	9.74	68.6	21.2		132.7	
		Z	9.78	69.0	21.4		138.2	
10225-CAB	UMTS-FDD (HSPA+)	X	6.83	66.9	19.4	5.97	134.3	±1.4 %
		Y	6.98	67.3	19.6		139.3	
		Z	6.92	67.4	19.6		142.7	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	7.94	77.5	27.4	9.21	143.5	±2.7 %
		Y	7.44	74.8	25.9		125.0	
		Z	7.14	74.7	26.0		131.4	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.95	74.9	26.1	9.24	140.8	±2.7 %
		Y	8.53	72.8	24.7		127.2	
		Z	8.14	72.3	24.6		127.1	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	9.66	75.7	26.4	9.30	149.7	±3.0 %
		Y	9.20	73.6	25.1		135.1	
		Z	8.81	73.3	25.1		134.3	

10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	4.39	67.0	18.8	3.96	138.0	±0.7 %
		Y	4.51	67.5	19.2		141.4	
		Z	4.46	67.3	18.9		146.2	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	3.59	67.1	18.7	3.46	128.3	±0.5 %
		Y	3.80	68.2	19.5		130.9	
		Z	3.74	68.1	19.2		135.6	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	3.55	67.3	18.9	3.39	129.6	±0.5 %
		Y	3.73	68.2	19.4		132.7	
		Z	3.63	67.8	19.0		137.7	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.30	67.4	19.8	5.81	145.6	±1.4 %
		Y	6.38	67.7	19.9		148.2	
		Z	6.12	66.8	19.4		129.8	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.56	66.9	19.5	6.06	126.9	±1.2 %
		Y	6.71	67.4	19.8		129.7	
		Z	6.71	67.5	19.8		136.5	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	9.96	68.8	21.5	8.37	132.0	±2.2 %
		Y	10.06	69.0	21.6		137.4	
		Z	10.06	69.3	21.7		140.2	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.89	69.6	19.3	3.76	139.4	±0.5 %
		Y	5.05	70.0	19.6		143.9	
		Z	4.98	70.0	19.5		146.8	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.81	69.6	19.4	3.77	136.6	±0.7 %
		Y	5.07	70.4	19.9		146.8	
		Z	4.90	70.2	19.6		144.5	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.82	69.8	19.4	1.54	136.4	±0.7 %
		Y	3.19	72.3	20.7		145.1	
		Z	2.84	69.7	19.1		145.5	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	9.77	68.6	21.3	8.23	130.4	±2.2 %
		Y	9.95	69.0	21.5		140.4	
		Z	9.88	69.0	21.5		138.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 7 and 8).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
750	41.9	0.89	6.69	6.69	6.69	0.80	1.17	± 12.0 %
835	41.5	0.90	6.41	6.41	6.41	0.68	1.22	± 12.0 %
1750	40.1	1.37	5.40	5.40	5.40	0.57	1.39	± 12.0 %
1900	40.0	1.40	5.17	5.17	5.17	0.76	1.14	± 12.0 %
2300	39.5	1.67	4.85	4.85	4.85	0.64	1.32	± 12.0 %
2450	39.2	1.80	4.57	4.57	4.57	0.75	1.34	± 12.0 %
2600	39.0	1.96	4.44	4.44	4.44	0.68	1.38	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	6.57	6.57	6.57	0.80	1.13	± 12.0 %
835	55.2	0.97	6.40	6.40	6.40	0.53	1.45	± 12.0 %
1750	53.4	1.49	4.99	4.99	4.99	0.37	1.82	± 12.0 %
1900	53.3	1.52	4.81	4.81	4.81	0.42	1.72	± 12.0 %
2300	52.9	1.81	4.54	4.54	4.54	0.80	1.24	± 12.0 %
2450	52.7	1.95	4.37	4.37	4.37	0.80	1.20	± 12.0 %
2600	52.5	2.16	4.23	4.23	4.23	0.80	1.18	± 12.0 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)

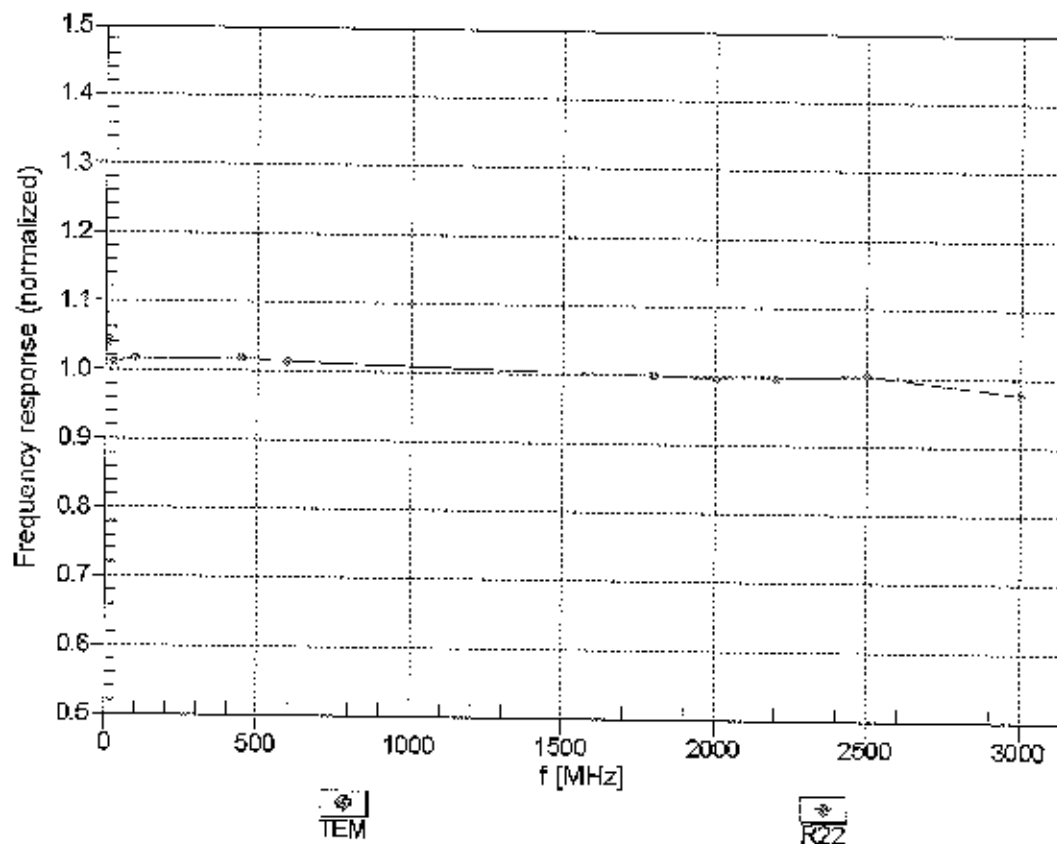



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

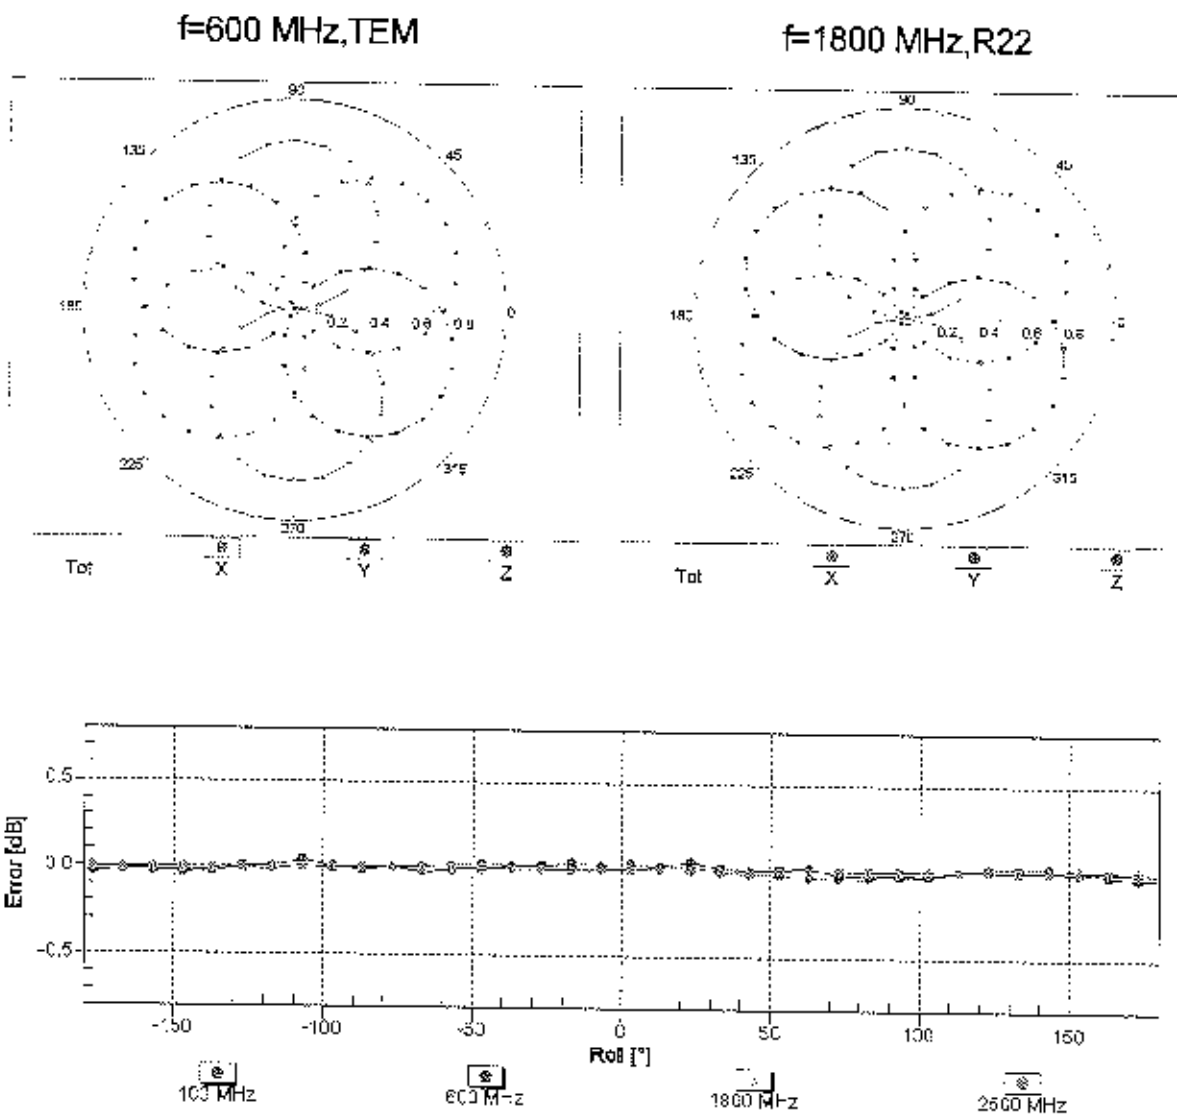


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

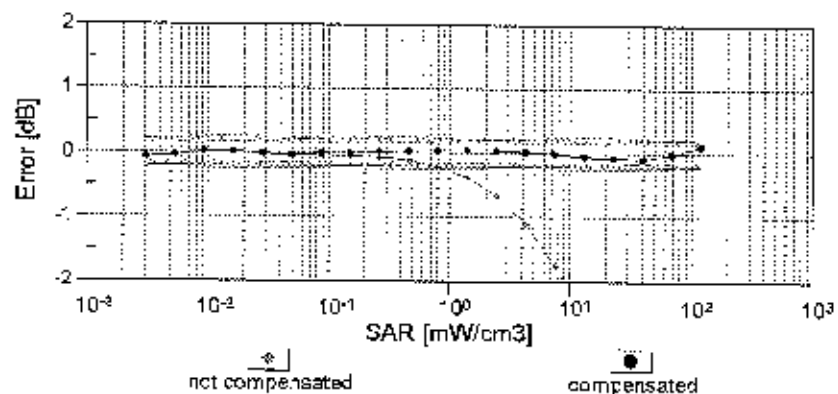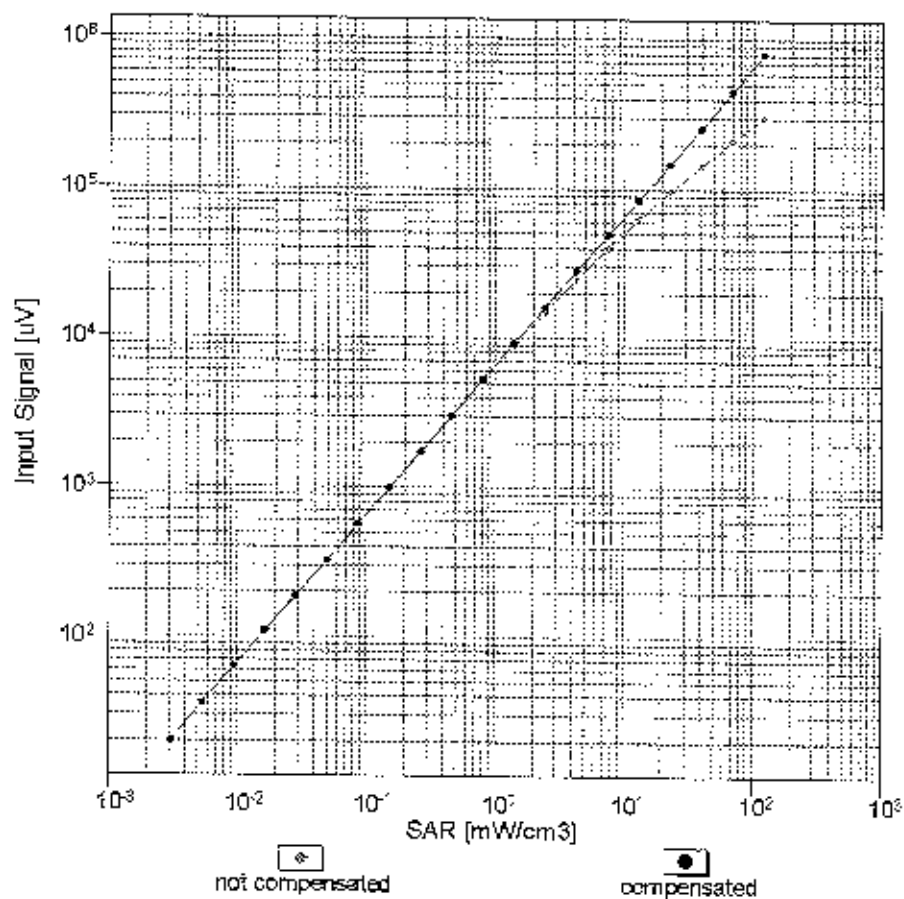



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

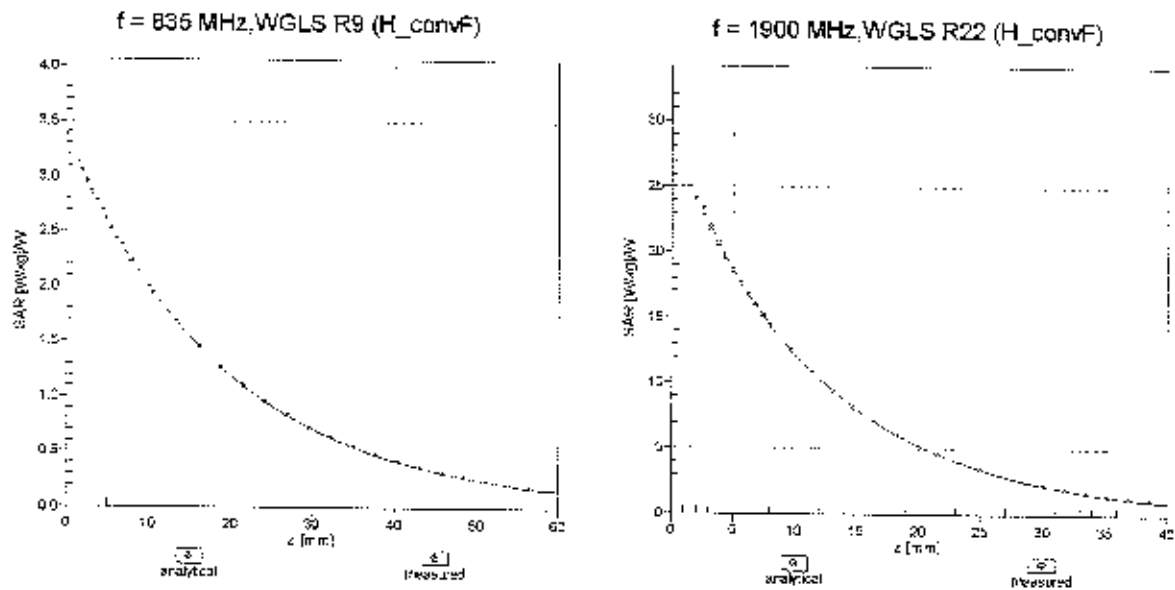

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900$ MHz

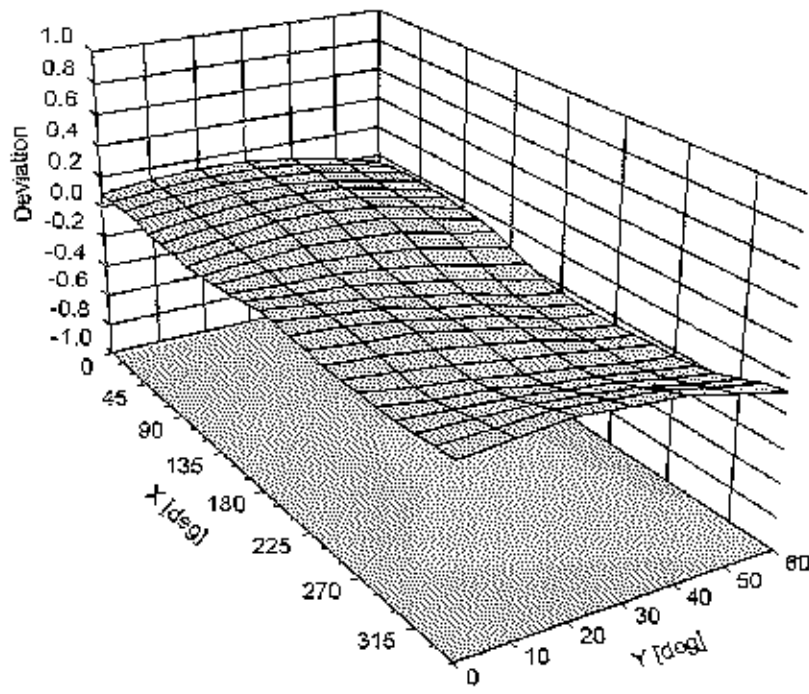

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	73.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3263_May15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3263**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **May 20, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: May 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

BN ✓
5/28/15



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3263

Manufactured: January 25, 2010
Calibrated: May 20, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.21	1.25	1.13	$\pm 10.1 \%$
DCP (mV) ^B	106.1	103.6	108.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	205.3	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		207.3	
		Z	0.0	0.0	1.0		199.5	
10010-CAA	SAR Validation (Square, 100ms, 10ms)	X	1.83	58.4	9.4	10.00	41.2	$\pm 1.4 \%$
		Y	3.88	63.3	12.9		47.5	
		Z	1.42	56.8	8.7		39.5	
10011-CAB	UMTS-FDD (WCDMA)	X	3.27	67.4	18.6	2.91	140.1	$\pm 0.7 \%$
		Y	3.39	67.5	18.7		142.7	
		Z	3.32	67.6	18.6		136.9	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.85	68.8	18.8	1.87	142.2	$\pm 0.7 \%$
		Y	3.38	70.7	19.5		144.8	
		Z	3.07	70.0	19.1		138.1	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	10.99	70.8	23.4	9.46	135.9	$\pm 2.5 \%$
		Y	11.36	70.3	22.8		124.7	
		Z	10.57	70.0	22.9		129.4	
10021-DAB	GSM-FDD (TDMA, GMSK)	X	9.38	84.7	22.1	9.39	139.8	$\pm 1.9 \%$
		Y	27.79	100.0	28.7		129.4	
		Z	9.29	86.8	23.8		134.5	
10023-DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	9.63	84.9	22.1	9.57	134.1	$\pm 2.5 \%$
		Y	25.29	98.2	28.2		124.0	
		Z	9.65	87.7	24.3		128.2	
10024-DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	16.20	88.9	21.0	6.56	145.2	$\pm 1.4 \%$
		Y	41.82	99.7	25.6		128.5	
		Z	24.57	96.8	24.1		142.0	
10027-DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	55.77	99.6	22.1	4.80	138.5	$\pm 2.2 \%$
		Y	53.39	99.7	23.9		140.5	
		Z	40.28	99.6	23.2		134.3	
10028-DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	81.43	99.8	20.7	3.55	148.6	$\pm 1.7 \%$
		Y	60.49	99.7	22.9		146.0	
		Z	62.69	99.6	21.2		145.0	
10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	96.06	93.7	16.0	1.16	140.3	$\pm 1.9 \%$
		Y	77.08	99.9	20.1		149.0	
		Z	99.64	99.9	18.6		138.0	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.24	67.2	19.6	5.67	131.7	$\pm 1.4 \%$
		Y	6.39	67.3	19.5		133.8	
		Z	6.19	67.2	19.6		126.8	

10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	10.13	76.3	26.6	9.29	142.6	±2.7 %
		Y	12.07	77.9	26.6		138.9	
		Z	9.41	74.3	25.6		134.1	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.13	66.9	19.5	5.80	129.6	±1.4 %
		Y	6.35	67.1	19.5		133.7	
		Z	6.39	68.0	20.1		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.34	69.6	21.7	8.07	147.0	±1.9 %
		Y	10.05	68.3	20.9		123.4	
		Z	10.08	69.1	21.3		138.2	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	9.44	75.3	26.3	9.28	137.0	±3.5 %
		Y	11.36	76.9	26.3		134.5	
		Z	8.85	73.5	25.3		130.3	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	5.79	66.2	19.2	5.75	126.9	±1.2 %
		Y	6.05	66.5	19.3		130.9	
		Z	5.92	66.9	19.5		145.5	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.25	66.9	19.5	5.82	131.8	±1.4 %
		Y	6.47	67.0	19.5		135.4	
		Z	6.09	66.5	19.3		127.5	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.78	66.7	19.7	5.73	130.0	±1.2 %
		Y	5.14	66.7	19.5		135.0	
		Z	4.83	67.1	19.9		147.9	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	8.63	80.4	29.1	9.21	147.7	±2.7 %
		Y	9.72	78.5	27.2		123.9	
		Z	7.63	76.7	27.2		142.5	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.75	66.6	19.6	5.72	128.2	±1.2 %
		Y	5.12	66.6	19.5		134.3	
		Z	4.87	67.1	19.9		148.0	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.76	66.6	19.6	5.72	127.9	±1.2 %
		Y	5.12	66.6	19.5		134.5	
		Z	4.87	67.3	20.0		147.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.87	69.1	21.6	8.10	135.8	±2.2 %
		Y	10.19	69.1	21.4		145.3	
		Z	9.65	68.8	21.3		130.5	
10225-CAB	UMTS-FDD (HSPA+)	X	6.90	67.2	19.5	5.97	139.2	±1.7 %
		Y	7.22	67.3	19.6		148.0	
		Z	6.75	67.0	19.4		134.1	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	8.68	80.6	29.2	9.21	148.0	±3.0 %
		Y	9.82	78.8	27.3		125.0	
		Z	7.85	77.6	27.7		143.5	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.56	73.7	25.6	9.24	126.6	±3.5 %
		Y	10.58	76.0	25.9		126.3	
		Z	8.84	74.8	26.1		146.7	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	9.24	74.6	25.9	9.30	133.6	±3.3 %
		Y	11.38	76.9	26.2		134.3	
		Z	8.79	73.2	25.1		128.6	

10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	4.39	67.0	18.9	3.96	143.8	±0.9 %
		Y	4.55	67.1	18.8		147.3	
		Z	4.42	67.4	19.0		139.9	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	3.59	67.2	18.9	3.46	132.2	±0.5 %
		Y	3.68	66.7	18.5		136.0	
		Z	3.57	67.1	18.6		128.5	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	3.50	67.0	18.7	3.39	134.0	±0.7 %
		Y	3.62	66.6	18.4		138.6	
		Z	3.50	67.2	18.7		129.8	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.11	66.8	19.4	5.81	127.7	±1.4 %
		Y	6.33	67.0	19.5		132.1	
		Z	6.28	67.6	19.9		146.6	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.71	67.5	19.9	6.06	134.2	±1.7 %
		Y	6.93	67.7	19.9		138.0	
		Z	6.57	67.2	19.6		128.0	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	10.17	69.5	21.9	8.37	138.5	±2.5 %
		Y	10.55	69.5	21.8		148.0	
		Z	9.92	69.0	21.6		132.5	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.79	69.2	19.1	3.76	144.1	±0.7 %
		Y	4.71	67.0	18.2		129.2	
		Z	4.72	69.3	19.2		139.3	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.69	69.2	19.2	3.77	142.1	±0.7 %
		Y	4.71	67.5	18.5		126.7	
		Z	4.51	68.6	18.8		137.3	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.55	68.0	18.5	1.54	141.7	±0.7 %
		Y	2.67	68.4	18.6		144.0	
		Z	2.98	70.8	19.5		138.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	10.01	69.3	21.8	8.23	137.3	±2.5 %
		Y	10.31	69.3	21.6		146.0	
		Z	9.69	68.8	21.4		129.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 7 and 8).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	6.27	6.27	6.27	0.29	1.87	± 12.0 %
835	41.5	0.90	6.18	6.18	6.18	0.49	1.42	± 12.0 %
1750	40.1	1.37	5.27	5.27	5.27	0.49	1.46	± 12.0 %
1900	40.0	1.40	4.96	4.96	4.96	0.66	1.28	± 12.0 %
2300	39.5	1.67	4.63	4.63	4.63	0.58	1.41	± 12.0 %
2450	39.2	1.80	4.40	4.40	4.40	0.71	1.34	± 12.0 %
2600	39.0	1.96	4.25	4.25	4.25	0.80	1.25	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	6.07	6.07	6.07	0.53	1.42	± 12.0 %
835	55.2	0.97	6.08	6.08	6.08	0.57	1.36	± 12.0 %
1750	53.4	1.49	4.88	4.88	4.88	0.54	1.50	± 12.0 %
1900	53.3	1.52	4.66	4.66	4.66	0.56	1.51	± 12.0 %
2300	52.9	1.81	4.42	4.42	4.42	0.69	1.33	± 12.0 %
2450	52.7	1.95	4.28	4.28	4.28	0.80	1.08	± 12.0 %
2600	52.5	2.16	4.11	4.11	4.11	0.80	1.09	± 12.0 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

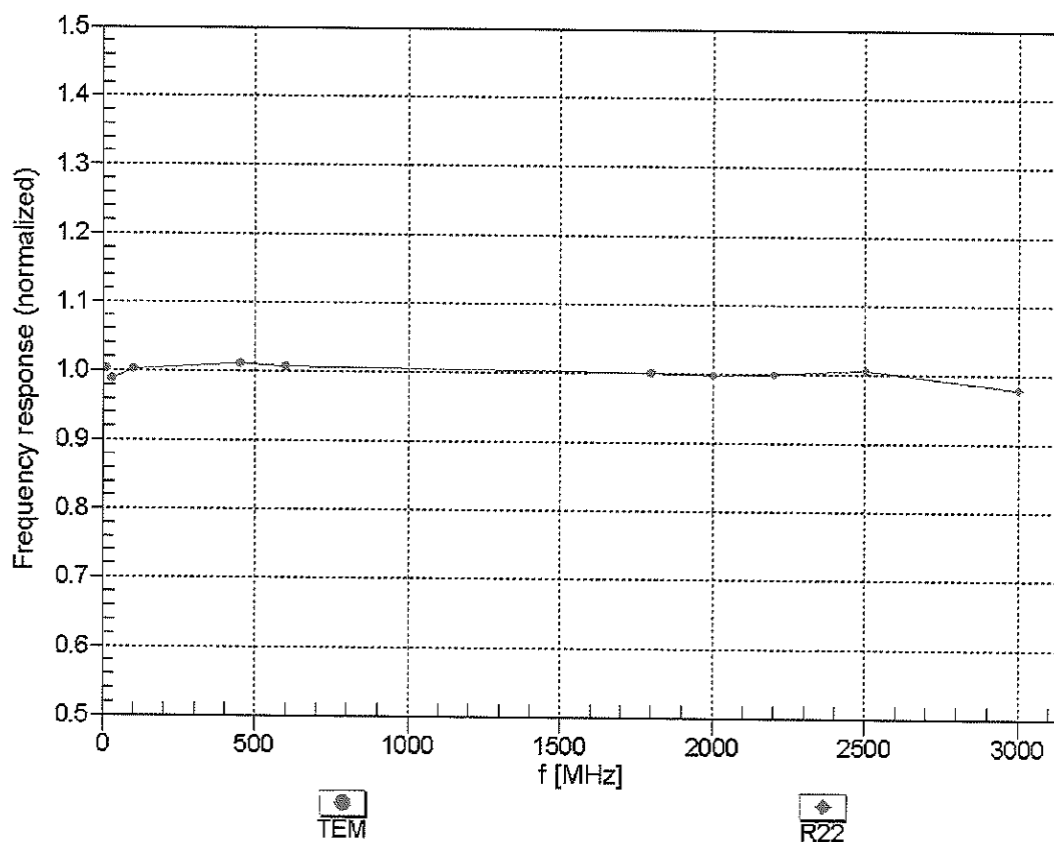



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


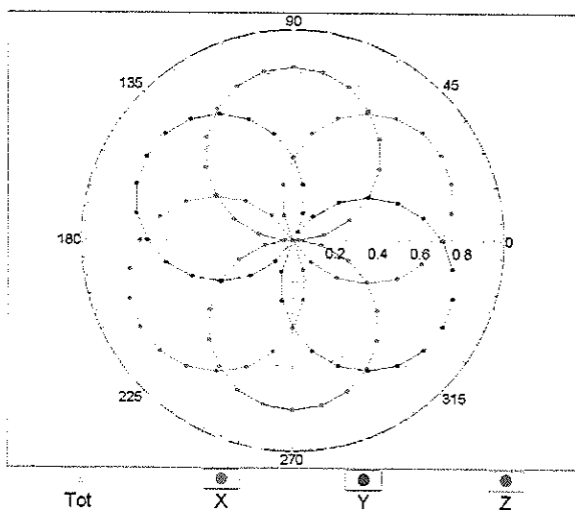


f=1800 MHz,R22

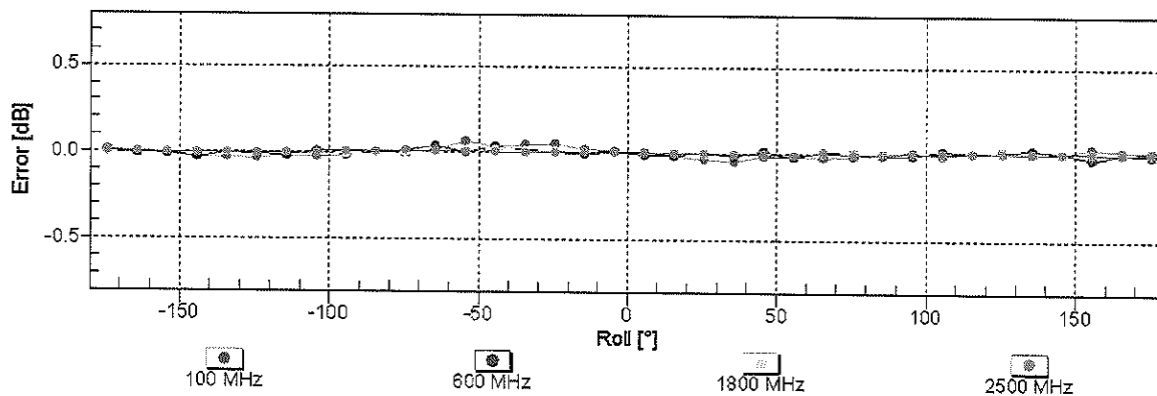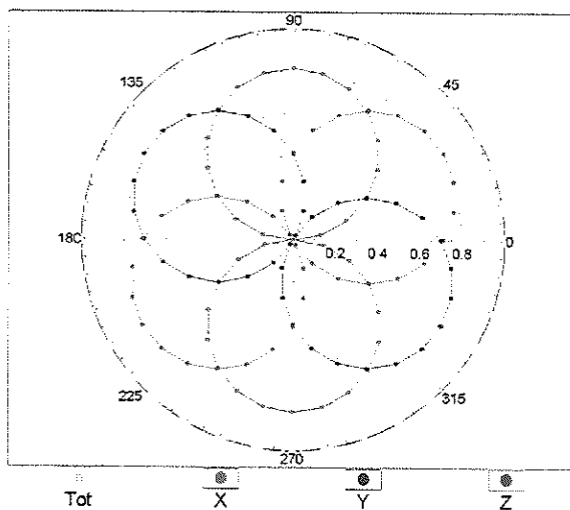


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

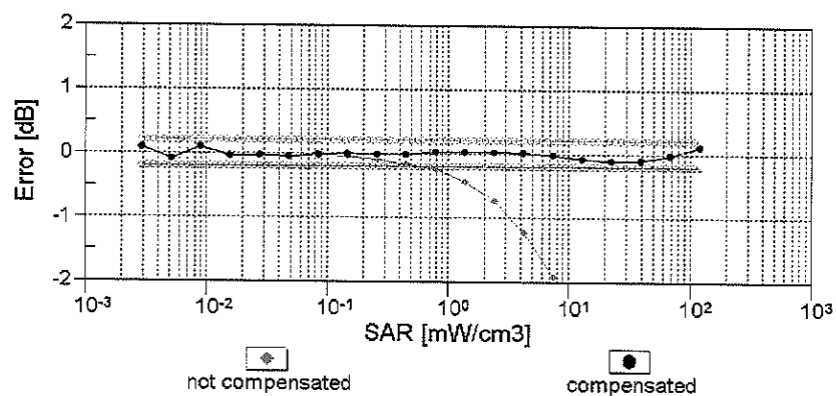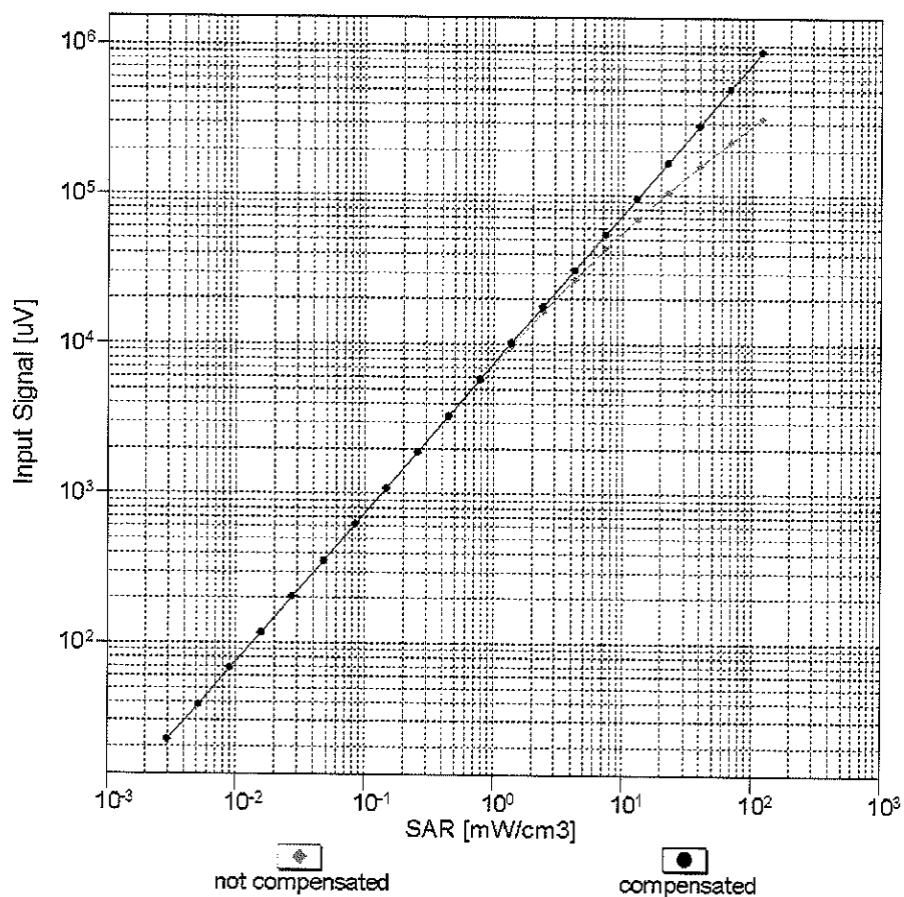



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

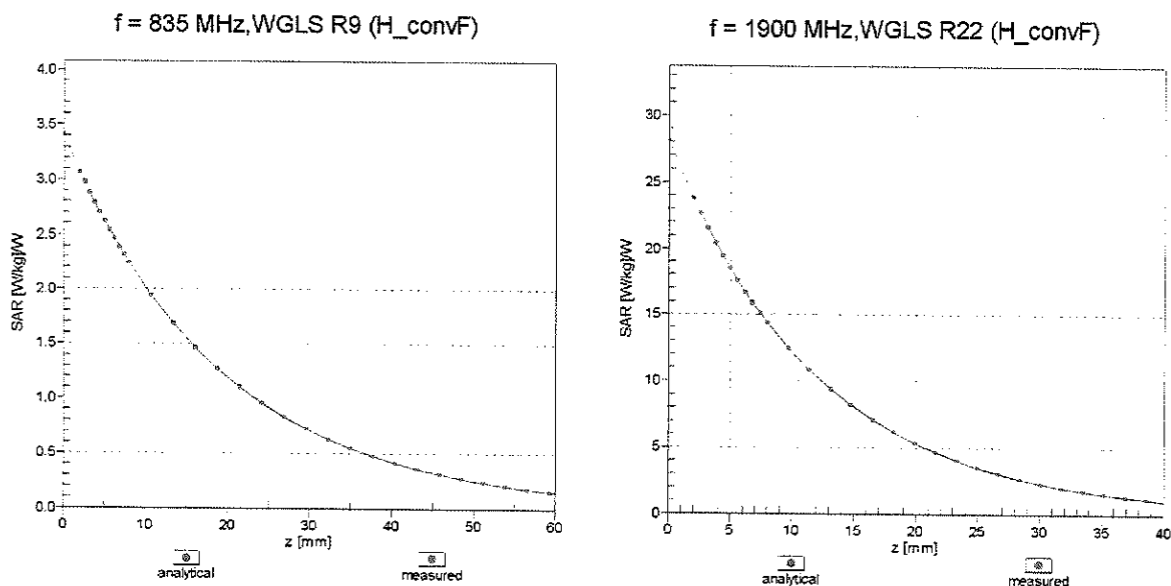

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

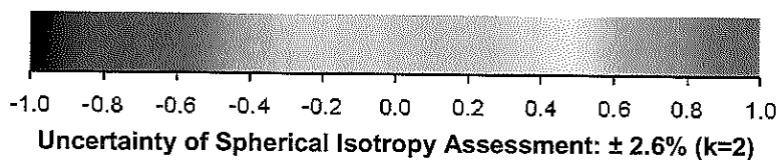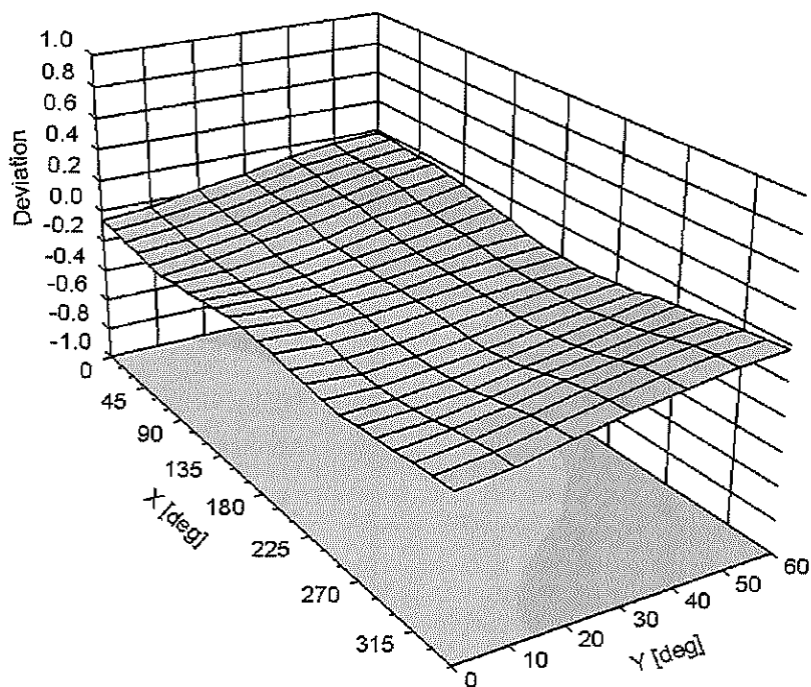

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	65.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm