HCT CO.,LTD.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
TEL: +82-31-645-6300 **FAX: +82-31-645-6401**

FCC UNII REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
June 26, 2020

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2006-FC010

FCC ID:	**A3LSMA516U**
APPLICANT:	**SAMSUNG Electronics Co., Ltd.**

Model:	SM-A516U
Additional Model:	SM-A516U1
EUT Type:	Mobile Phone
Modulation type	OFDM
FCC Classification:	Unlicensed National Information Infrastructure(NII)
FCC Rule Part(s):	Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

REVIEWED BY

Report prepared by : Jeong Ho Kim Engineer of Telecommunication Testing Center	Report approved by : Jong Seok Lee Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2006-FC010	June 26, 2020	- First Approval Report

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Table of Contents

REVIEWED BY 2
1. GENERAL INFORMATION 5
EUT DESCRIPTION 5
2. MAXIMUM OUTPUT POWER 6
3. TEST METHODOLOGY 7
EUT CONFIGURATION 7
EUT EXERCISE 7
GENERAL TEST PROCEDURES 7
DESCRIPTION OF TEST MODES 7
4. INSTRUMENT CALIBRATION 8
5. FACILITIES AND ACCREDITATIONS 8
5.1 FACILITIES 8
5.2 EQUIPMENT 8
6. ANTENNA REQUIREMENTS 8
7. MEASUREMENT UNCERTAINTY 9
8. DESCRIPTION OF TESTS 10
9. SUMMARY OF TEST RESULTS 26
10. TEST RESULT 27
10.1 DUTY CYCLE 27
10.2 26 dB BANDWIDTH 30
10.3 6dB BANDWIDTH 39
10.4 OUTPUT POWER MEASUREMENT 41
10.5 POWER SPECTRAL DENSITY 44
10.6 FREQUENCY STABILITY. 53
10.6.1 80MHz BW 53
10.7 STRADDLE CHANNEL 69
10.7.1 26dB Bandwidth 69
10.7.2 6dB Bandwidth 72
10.7.3 Output Power 75
10.7.4 Power Spectral Density 78
10.8 RADIATED SPURIOUS EMISSIONS 81
10.9 RADIATED RESTRICTED BAND EDGE 113
10.10 POWERLINE CONDUCTED EMISSIONS 135
11. LIST OF TEST EQUIPMENT 139
12. ANNEX A_ TEST SETUP PHOTO 141

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SM-A516U	
Additional Model	SM-A516U1	
EUT Type	Mobile Phone	
Power Supply	DC 3.86 V	
Battery Information	Model: EB-BA516ABY Type: Li-ion Battery	
Travel Adapter Information	Model : EP-TA200 Manufacture: DONG YANG E&P	
Data Cable Information	Model : EP-DR140AWE Manufacture: KSD	
Ear-jack Information	Model : EHS64AVFWE Manufacture: CRESYN	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20MHz BW : 5180 - 5240 40MHz BW : 5190 - 5230 80MHz BW : 5210
	U-NII-2A	20MHz BW : 5260 - 5320 40MHz BW : 5270 - 5310 80MHz BW : 5290
	U-NII-2C	20MHz BW : 5500 - 5720 40MHz BW : 5510 - 5710 80MHz BW : 5530 – 5690
	U-NII-3	20MHz BW : 5745 - 5825 40MHz BW : 5755 - 5795 80MHz BW : 5775
Antenna Specification	Antenna type: MFA Peak Gain : -5.81 dBi(UNII 1), -7.60 dBi(UNII 2A), -8.20 dBi(UNII 2C), -11.40 dBi(UNII 3)	
Straddle channel	Supported	
TDWR Band	Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	May 01, 2020 ~ June 02, 2020	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	RF Output Power	
		(dBm)	(W)
UNII1	802.11a	17.44	0.056
	802.11n (HT20)	17.34	0.054
	802.11n (HT40)	16.22	0.042
	802.11ac (VHT20)	15.73	0.037
	802.11ac (VHT40)	15.55	0.036
	802.11ac (VHT80)	13.97	0.025
UNII2A	802.11a	17.23	0.053
	802.11n (HT20)	16.87	0.049
	802.11n (HT40)	16.42	0.044
	802.11ac (VHT20)	15.16	0.033
	802.11ac (VHT40)	15.58	0.036
	802.11ac (VHT80)	13.82	0.024
UNII2C	802.11a	17.63	0.058
	802.11n (HT20)	17.21	0.053
	802.11n (HT40)	16.92	0.049
	802.11ac (VHT20)	15.70	0.037
	802.11ac (VHT40)	15.65	0.037
	802.11ac (VHT80)	13.71	0.024
UNII3	802.11a	17.05	0.051
	802.11n (HT20)	16.89	0.049
	802.11n (HT40)	16.61	0.046
	802.11ac (VHT20)	15.71	0.037
	802.11ac (VHT40)	15.67	0.037
	802.11ac (VHT80)	13.98	0.025

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E" and ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices' were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2) The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (±dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

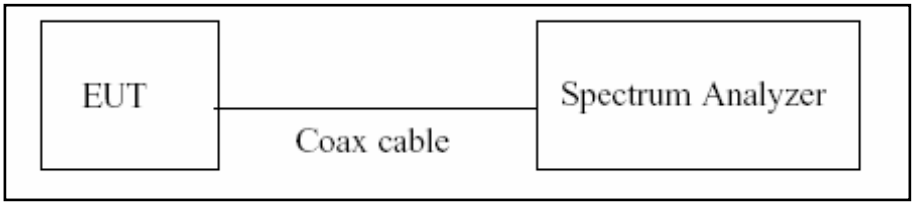

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.

1. RBW = 8 MHz (the largest availble value)
2. VBW = 8 MHz (≥ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/ T_{total} and Duty Cycle Factor = 10log(1/Duty Cycle)

8.2. 6dB Bandwidth & 26dB Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

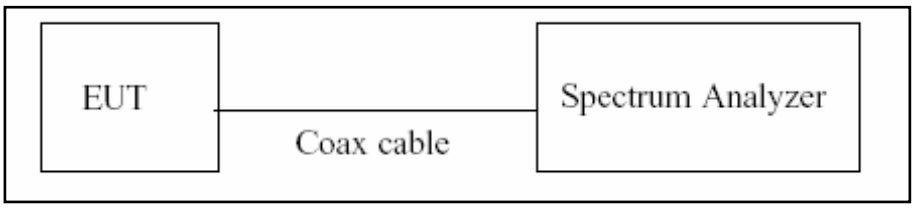

Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW ≥ 3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum lever measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

8.3. Output Power Measurement

Limit

Band	Limit
UNII 1	- Master : Not exceed 1 W(=30dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

Test Configuration

Power Meter

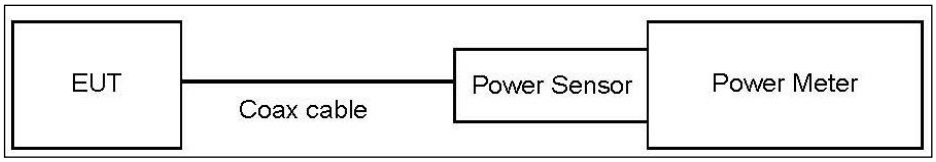

Spectrum Analyzer(Only Straddle Channel)

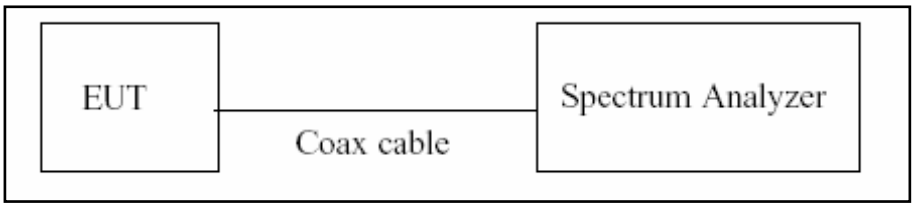

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW ≥ 3 MHz.
5. Number of points in sweep ≥ 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to “free run”.
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add 10log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.
   The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss(10 dB) + Cable loss
3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	10.78
UNII 2A	10.78
UNII 2C	10.78
UNII 3	10.78

(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

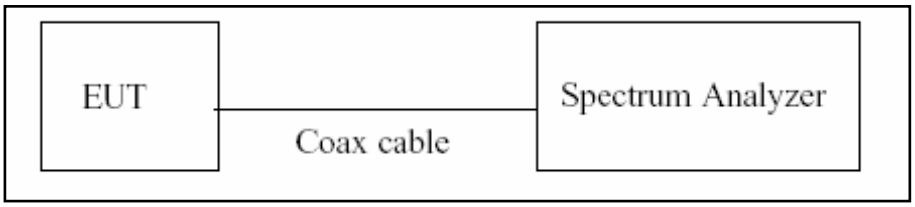

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW ≥ 3 MHz
4. Number of points in sweep ≥ 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add 10 log(1/x), where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.
   The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss(10 dB) + Cable loss
3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	10.78
UNII 2A	10.78
UNII 2C	10.78
UNII 3	10.78

(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

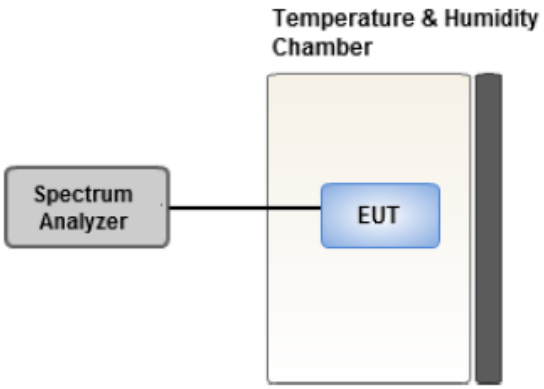

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 ℃ and 50 ℃.
2. The temperature was incremented by 10 ℃ intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battety operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56[(a)]	56 to 46[(a)]
0.50 to 5	56	46
5 to 30	60	50

[(a)]Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8.7. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of −27 dBm/MHz.

2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of −27 dBm/MHz.

3. UNII 3: All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration

Below 30 MHz

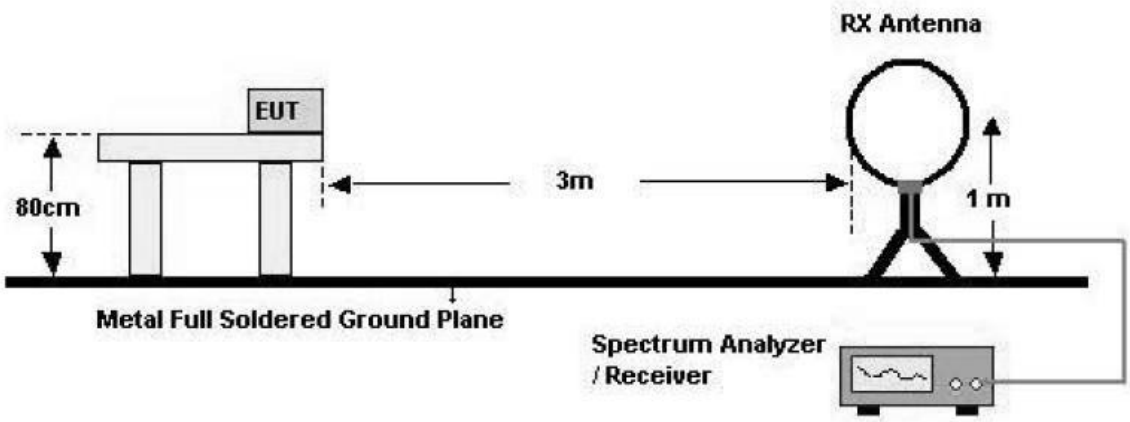

30 MHz - 1 GHz

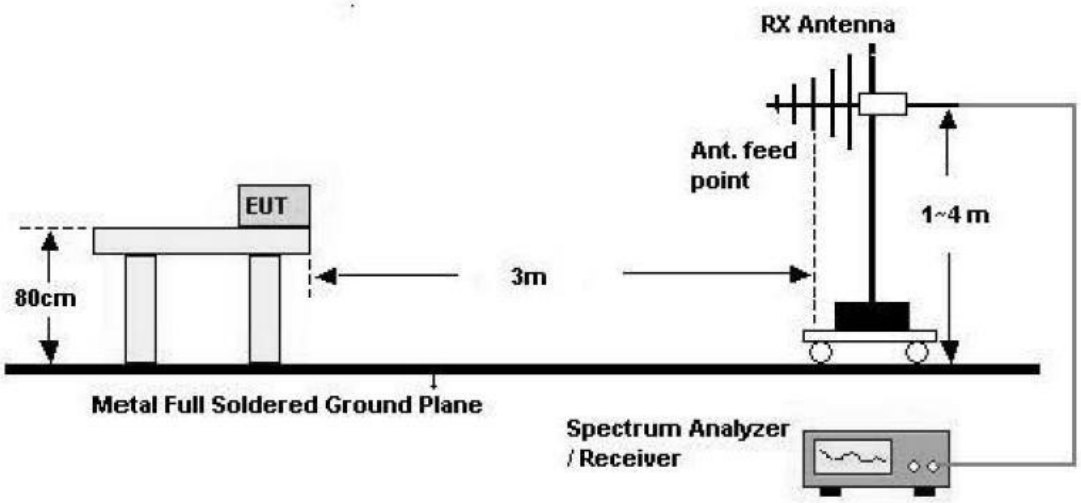

Above 1 GHz

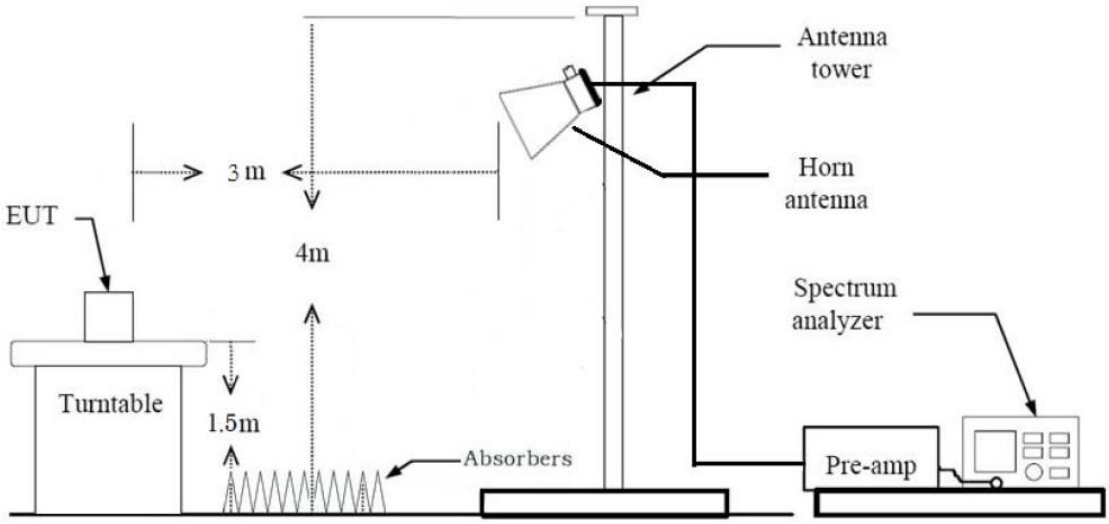

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. .We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = 40log(3 m/300 m) = - 80 dB
   Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = 40log(3 m/30 m) = - 40 dB
   Measurement Distance : 3 m
8. Spectrum Setting
   - Frequency Range = 9 kHz ~ 30 MHz
   - Detector = Peak
   - Trace = Maxhold
   - RBW = 9 kHz
   - VBW ≥ 3 x RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making
measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 30 MHz – 1 GHz
      - Detector = Peak
      - Trace = Maxhold
      - RBW = 100 kHz
      - VBW ≥ 3 x RBW
   (2) Measurement Type(Quasi-peak):
      - Measured Frequency Range : 30 MHz – 1 GHz
      - Detector = Quasi-Peak
      - RBW = 120 kHz
   ※In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle ≥ 98 percent) = VBW ≤ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW ≥ 1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimym number of traces by a factor of 1/x, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = 20log (test distance / specific distance) (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.
  Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle ≥ 98 percent) = VBW ≤ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW ≥ 1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimym number of traces by a factor of 1/x, where x is the duty cycle.

9. Measured Frequency Range :
   - 4500MHz ~ 5150MHz
   - 5350MHz ~ 5460MHz
   - 5460MHz ~ 5470MHz
   - (75 MHz or more below the 5725MHz) ~ 5725MHz
   - 5850MHz ~ (75 MHz or more above the 5850MHz)
10. Distance extrapolation factor = 20log (test distance / specific distance) (dB)
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator + Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.938	0.280	1000
802.11n(HT20)	MCS 0	0.925	0.340	1000
802.11n(HT40)	MCS 0	0.861	0.652	3000
802.11ac(VHT20)	MCS 0	0.927	0.331	1000
802.11ac(VHT40)	MCS 0	0.864	0.637	3000
802.11ac(VHT80)	MCS 0	0.851	0.701	3000

8.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
   - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
   - Worstcase : Stand alone
2. EUT Axis
   - Radiated Spurious Emissions : Z
   - Radiated Restricted Band Edge : Y
3. All datarate of operation were investigated and the worst case datarate results are reported
   - 802.11a : 6Mbps
   - 802.11n : MCS0
   - 802.11ac : MCS0
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
   - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
   - Mode : Stand alone + External accessories(Earphone, etc) + Travel Adapter,
     Stand alone + Travel Adapter

   - Worstcase : Stand alone + Travel Adapter

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10 log $\log_{10}$ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log $\log_{10}$ (BW) dBm (5470-5725 MHz) <1 W(5725-5850 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g) §2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)	Radiated	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.428	1.523	0.938	0.280
	9	0.961	1.086	0.885	0.530
	12	0.723	0.839	0.862	0.644
	18	0.492	0.597	0.824	0.843
	24	0.372	0.487	0.763	1.176
	36	0.256	0.362	0.708	1.500
	48	0.196	0.294	0.666	1.767
	54	0.180	0.288	0.627	2.026

Mode	MCS Index	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.336	1.445	0.925	0.340
	1	0.688	0.795	0.865	0.628
	2	0.472	0.570	0.828	0.819
	3	0.364	0.462	0.788	1.035
	4	0.257	0.371	0.693	1.594
	5	0.200	0.325	0.615	2.113
	6	0.185	0.301	0.614	2.117
	7	0.168	0.284	0.592	2.277
802.11n (HT40)	0	0.664	0.771	0.861	0.652
	1	0.352	0.459	0.766	1.157
	2	0.248	0.355	0.698	1.562
	3	0.196	0.312	0.628	2.020
	4	0.144	0.251	0.574	2.409
	5	0.116	0.241	0.482	3.173
	6	0.108	0.224	0.481	3.183
	7	0.100	0.217	0.461	3.359

Mode	MCS Index	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.345	1.452	0.927	0.331
	1	0.692	0.817	0.847	0.719
	2	0.477	0.575	0.829	0.814
	3	0.368	0.484	0.760	1.190
	4	0.260	0.367	0.708	1.497
	5	0.204	0.302	0.674	1.714
	6	0.188	0.296	0.636	1.962
	7	0.172	0.288	0.597	2.243
	8	0.152	0.260	0.585	2.327
802.11ac (VHT40)	0	0.669	0.775	0.864	0.637
	1	0.355	0.471	0.754	1.228
	2	0.252	0.368	0.684	1.648
	3	0.200	0.307	0.651	1.864
	4	0.148	0.255	0.580	2.369
	5	0.120	0.236	0.508	2.939
	6	0.112	0.228	0.490	3.096
	7	0.104	0.221	0.471	3.268
	8	0.097	0.213	0.454	3.427
	9	0.089	0.204	0.435	3.617
802.11ac (VHT80)	0	0.611	0.718	0.851	0.701
	1	0.328	0.444	0.738	1.318
	2	0.232	0.348	0.667	1.761
	3	0.184	0.291	0.632	1.994
	4	0.136	0.261	0.522	2.824
	5	0.112	0.229	0.491	3.092
	6	0.104	0.220	0.472	3.262
	7	0.100	0.217	0.460	3.374
	8	0.088	0.205	0.428	3.684
	9	0.084	0.201	0.417	3.795

Note:

In order to simplify the report, attached plots were only lowest datarate.

802.11a	802.11n(HT20)
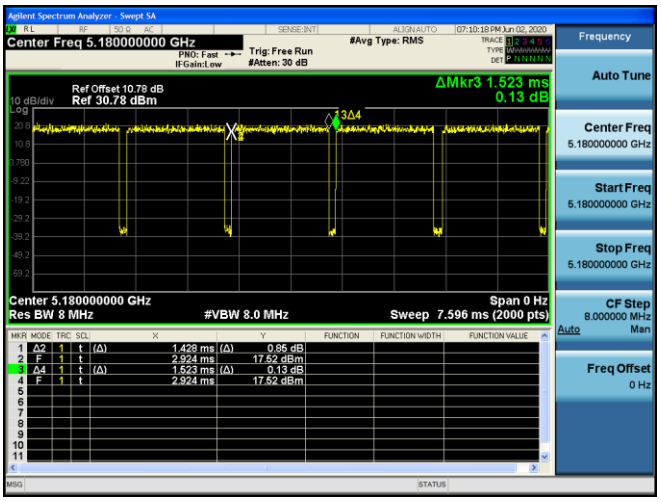	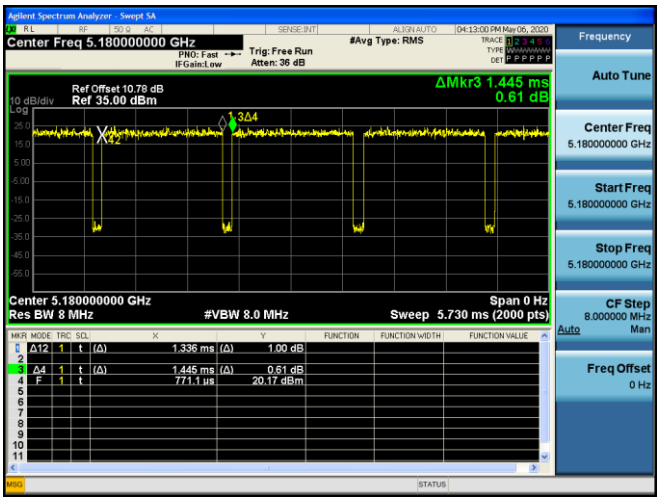
802.11n(HT40)	**802.11ac(VHT20)**
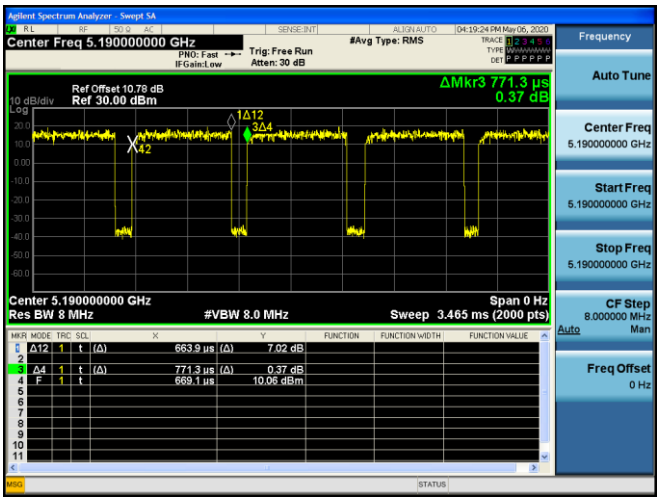	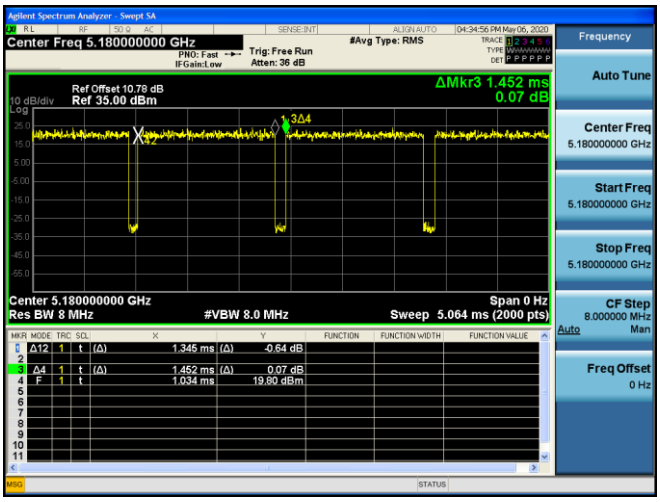
802.11ac(VHT40)	**802.11ac(VHT80)**
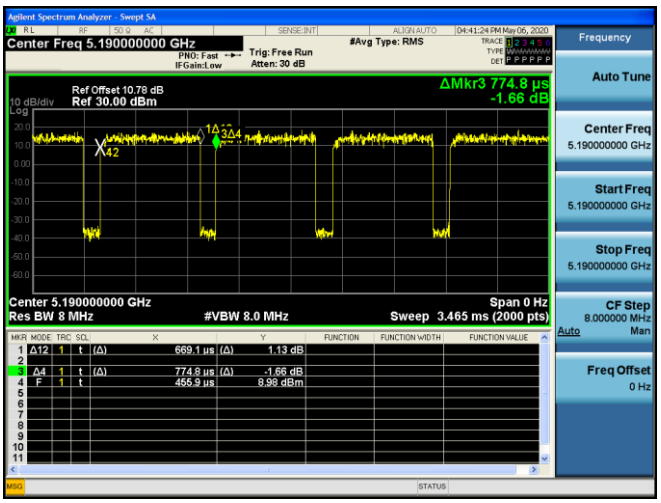	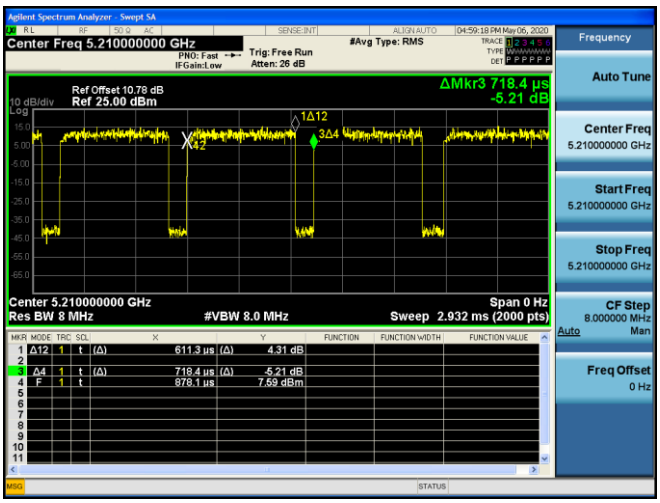

10.2 26 dB BANDWIDTH

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.1.

802.11a Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.39	17.286
5200	40	22.07	17.083
5240	48	21.28	17.007
5260	52	22.60	17.069
5300	60	21.27	17.223
5320	64	21.25	17.177
5500	100	22.42	17.315
5600	120	22.47	17.141
5720	144	21.52	17.308
5745	149	22.73	17.212
5785	157	22.99	17.030
5825	165	21.54	17.276

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	24.06	18.213
5200	40	24.56	18.203
5240	48	23.00	18.288
5260	52	24.70	18.455
5300	60	24.23	18.405
5320	64	23.69	18.429
5500	100	24.27	18.168
5600	120	23.62	18.397
5720	144	23.44	18.427
5745	149	23.90	18.417
5785	157	25.13	18.454
5825	165	24.84	18.365

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	41.06	36.180
5230	46	42.79	37.471
5270	54	43.14	37.722
5310	62	42.17	36.403
5510	102	40.90	36.263
5590	118	43.71	37.403
5710	142	43.04	37.583
5755	151	43.43	37.448
5795	159	43.45	37.509

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	23.21	18.234
5200	40	23.83	18.191
5240	48	23.44	18.325
5260	52	23.38	18.541
5300	60	23.45	18.174
5320	64	23.03	18.242
5500	100	22.53	18.027
5600	120	23.71	18.149
5720	144	22.51	18.153
5745	149	22.98	18.307
5785	157	22.55	18.382
5825	165	22.38	18.170

802.11ac(VHT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	41.77	36.178
5230	46	43.53	37.395
5270	54	42.14	37.096
5310	62	41.36	36.219
5510	102	41.59	36.096
5590	118	42.62	37.109
5710	142	43.06	37.014
5755	151	43.02	37.588
5795	159	42.67	37.264

802.11ac(VHT80) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	81.92	75.884
5290	58	81.94	75.869
5530	106	81.48	75.955
5610	122	82.91	75.893
5690	138	81.65	76.213
5775	155	81.78	76.028

▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 1 BAND 26dB Bandwidth (CH 40)	802.11a UNII 2A BAND 26dB Bandwidth (CH 52)
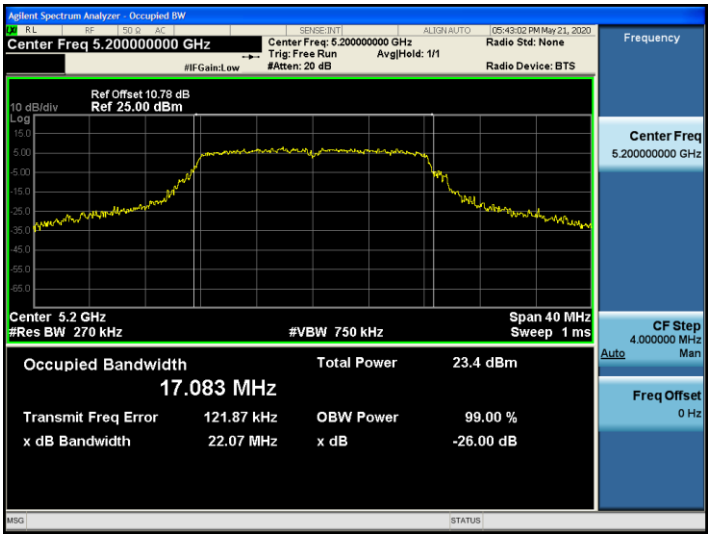	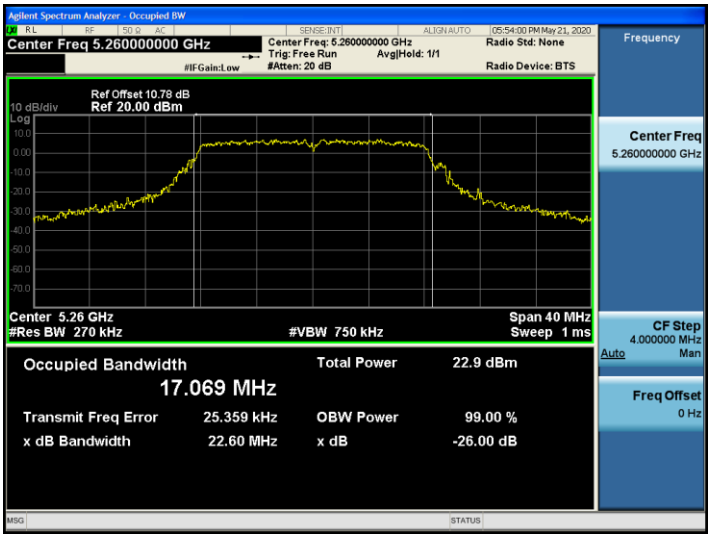
802.11a UNII 2C BAND 26dB Bandwidth (CH 120)	**802.11a UNII 3 BAND 26dB Bandwidth (CH 157)**
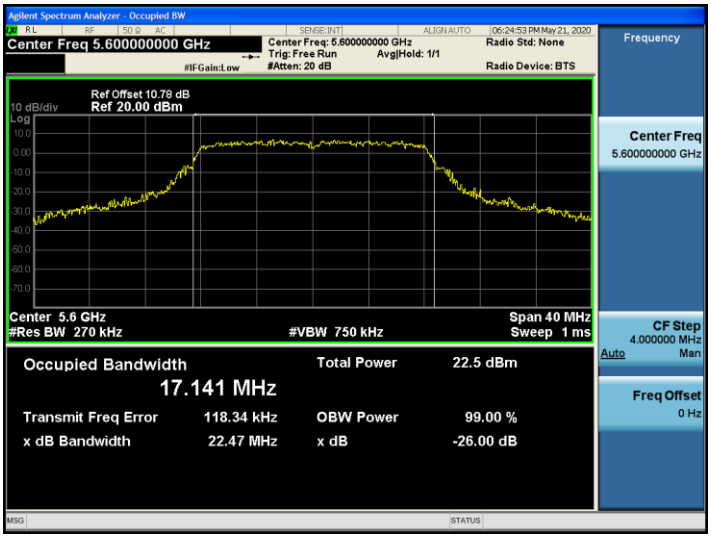	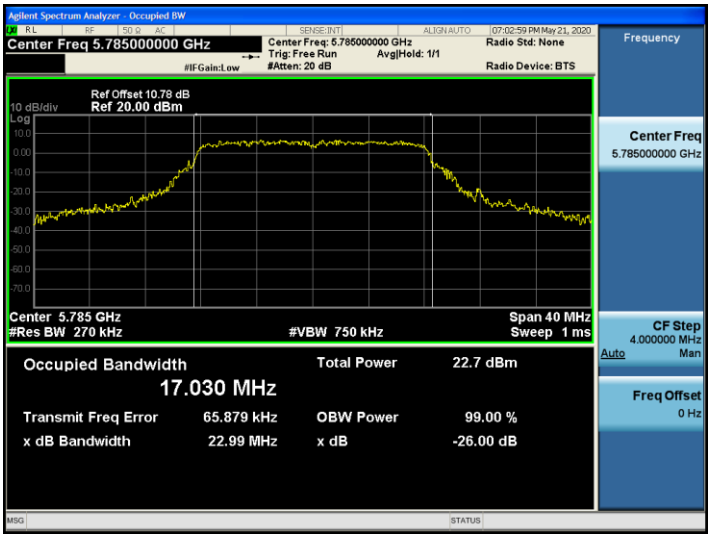

▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 40)	802.11n_HT20 UNII 2A BAND 26dB Bandwidth(CH 52)
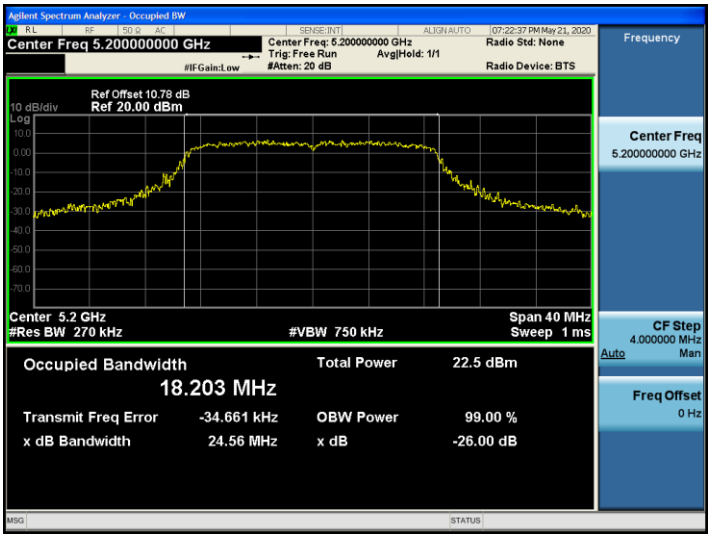	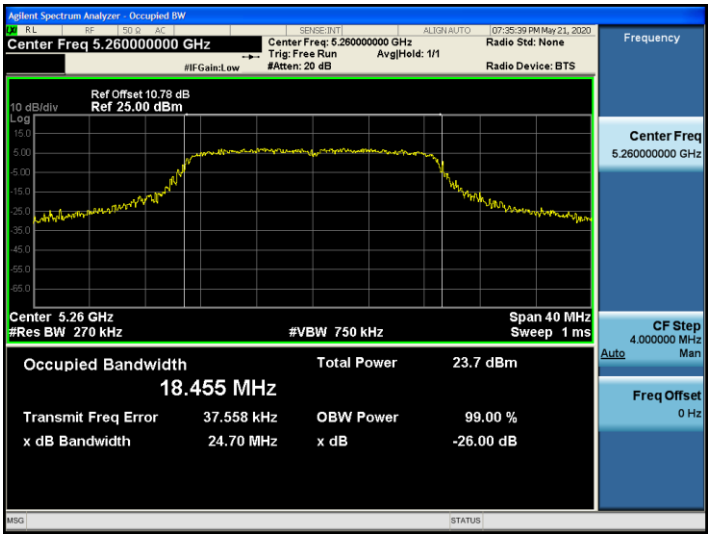
802.11n_HT20 UNII 2C BAND 26dB Bandwidth(CH 100)	**802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 157)**
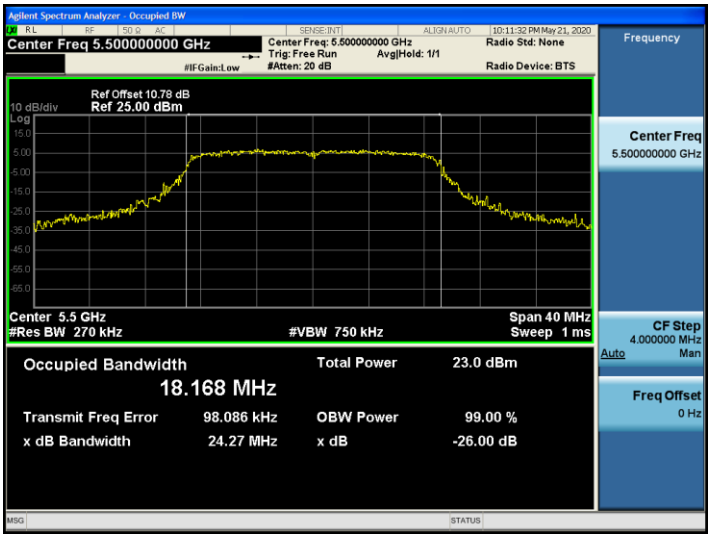	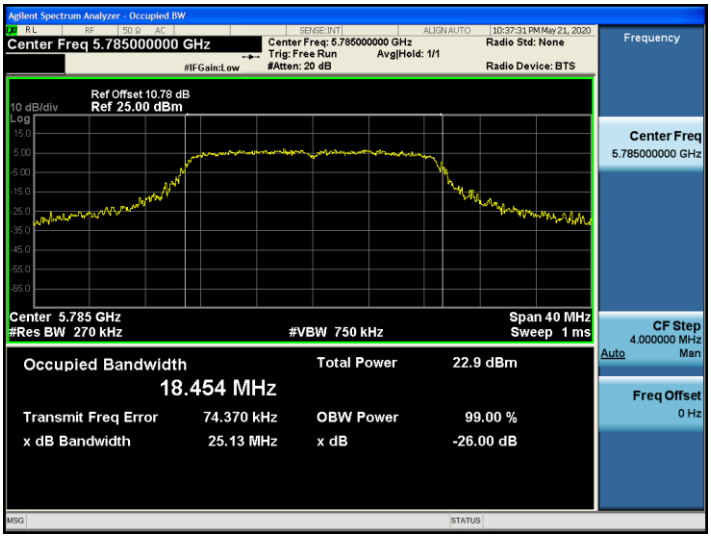

▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)	802.11n_HT40 UNII 2A BAND 26dB Bandwidth (CH 54)
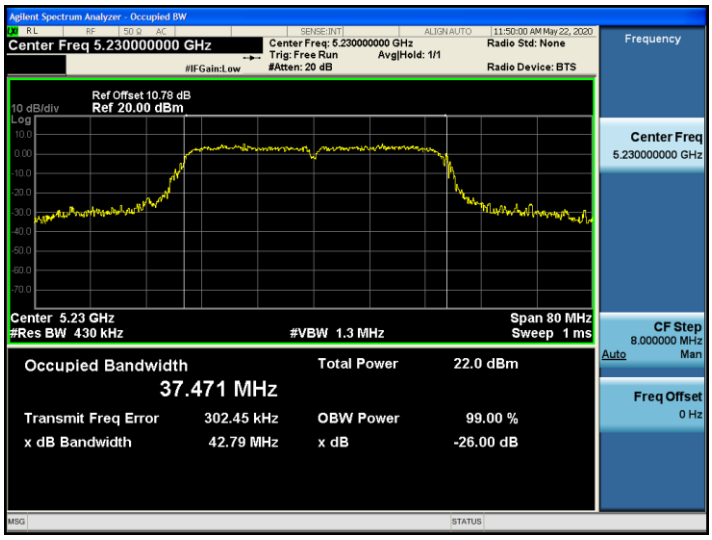	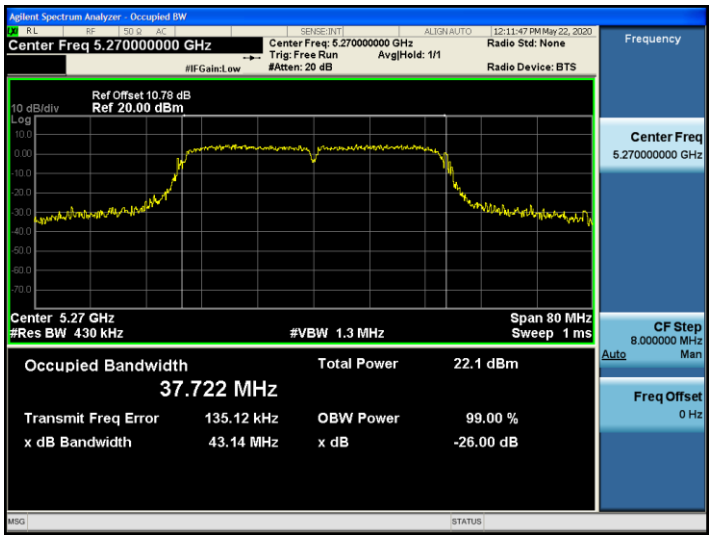
802.11n_HT40 UNII 2C BAND 26dB Bandwidth(CH 118)	**802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)**
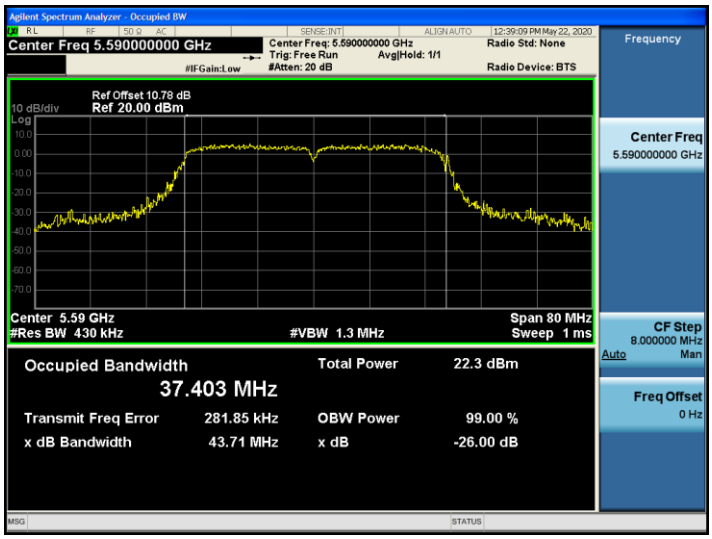	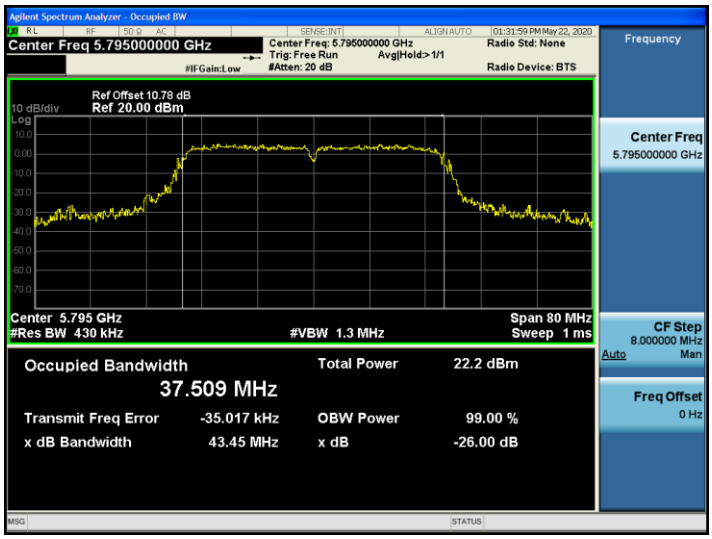

▣ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac_VHT20 UNII 1 BAND 26dB Bandwidth(CH 40)

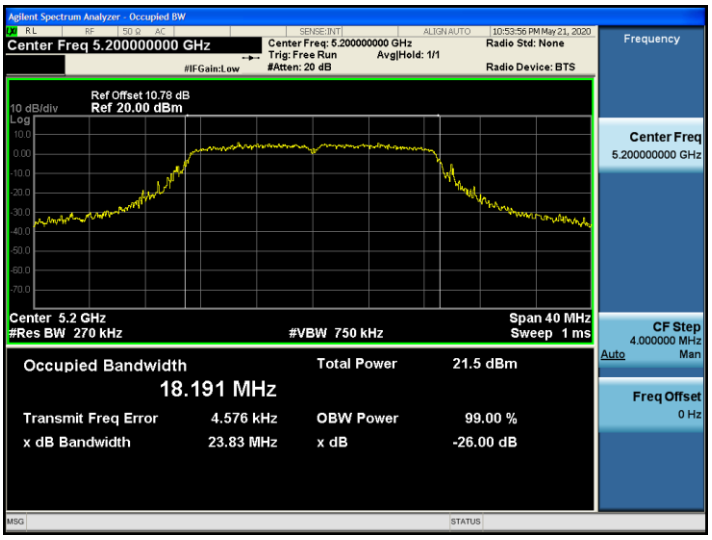

802.11ac_VHT20 UNII 2A BAND 26dB Bandwidth(CH 60)

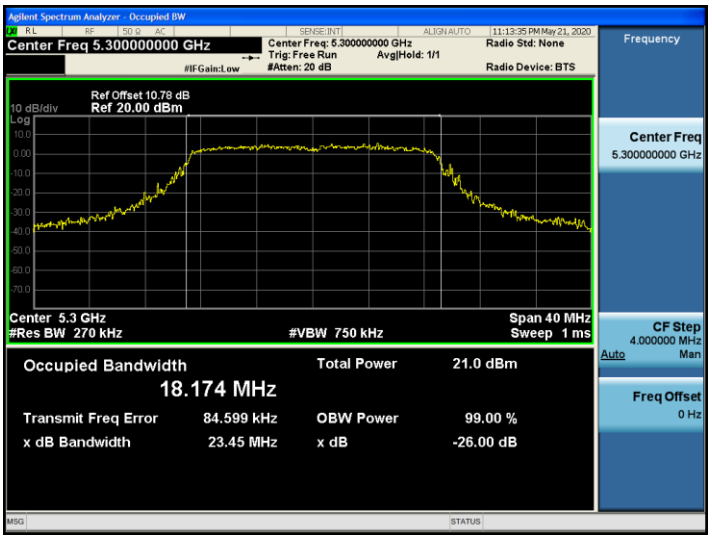

802.11ac_VHT20 UNII 2C BAND 26dB Bandwidth(CH 120)

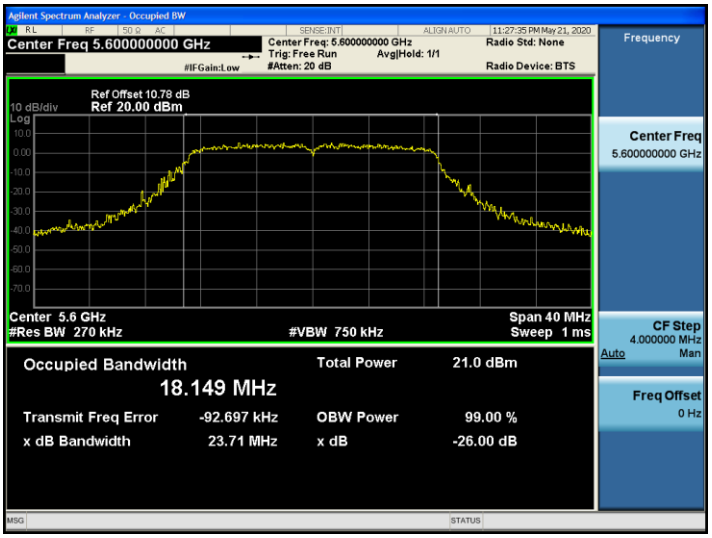

802.11ac_VHT20 UNII 3 BAND 26dB Bandwidth(CH 149)

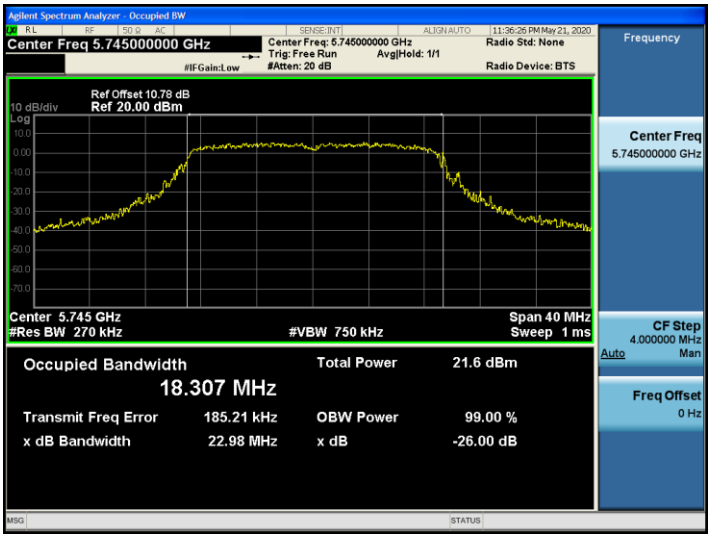

▣ Test Plots(802.11ac(VHT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 46)	802.11ac_VHT40 UNII 2A BAND 26dB Bandwidth (CH 54)
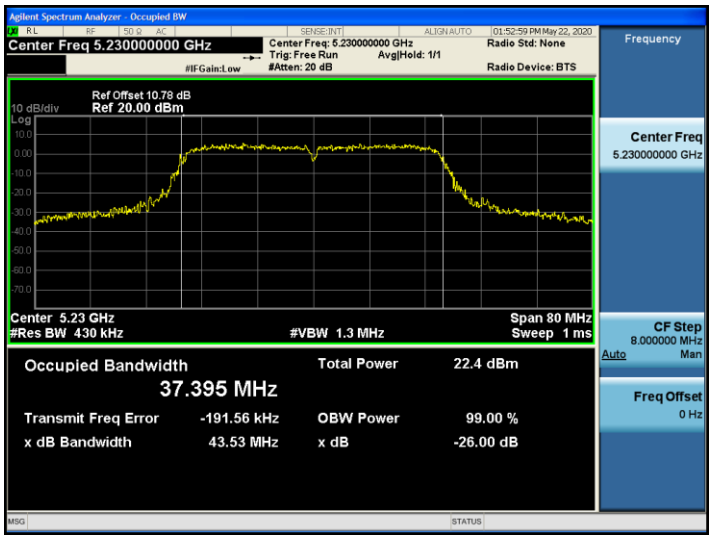	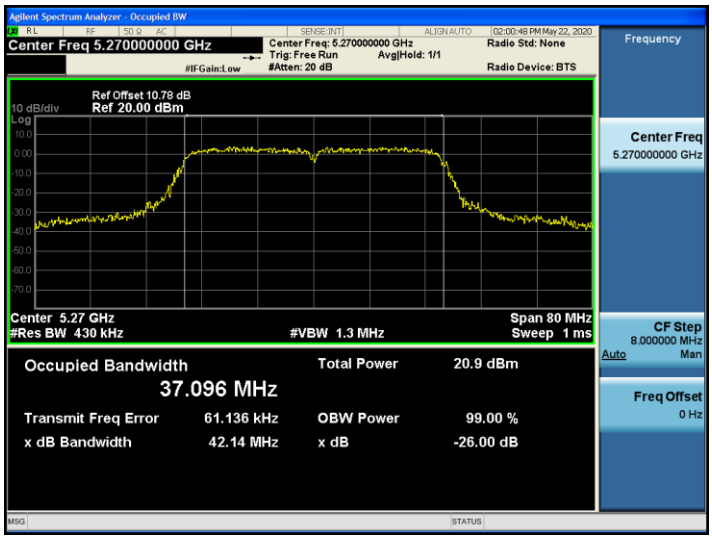
802.11ac_VHT40 UNII 2C BAND 26dB Bandwidth(CH 142)	**802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 151)**
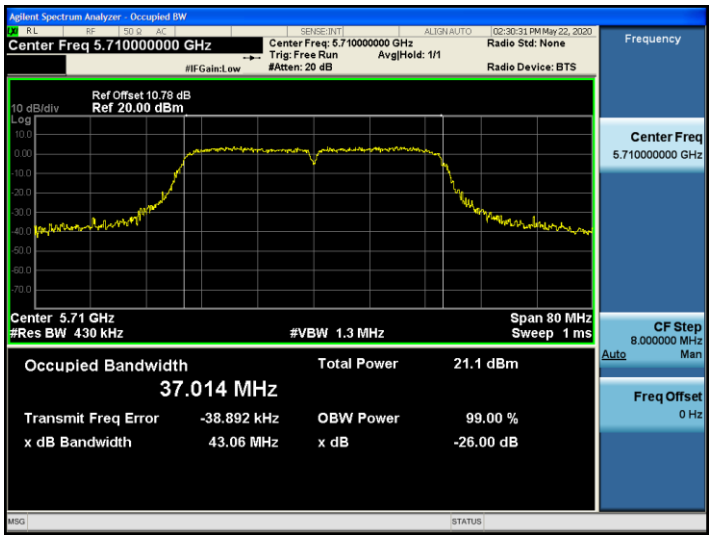	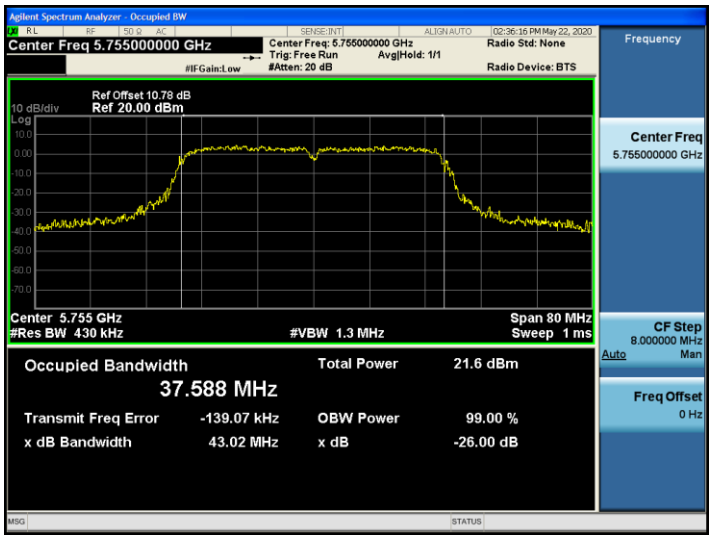

▣ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)	802.11ac_VHT80 UNII 2A BAND 26dB Bandwidth (CH 58)
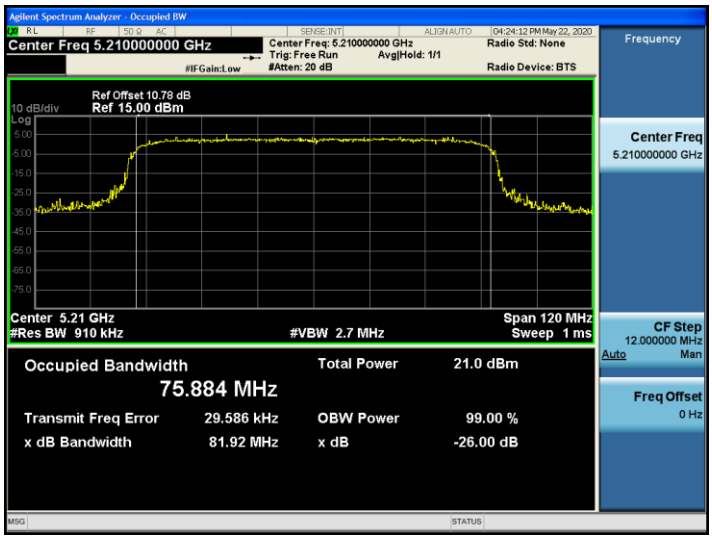	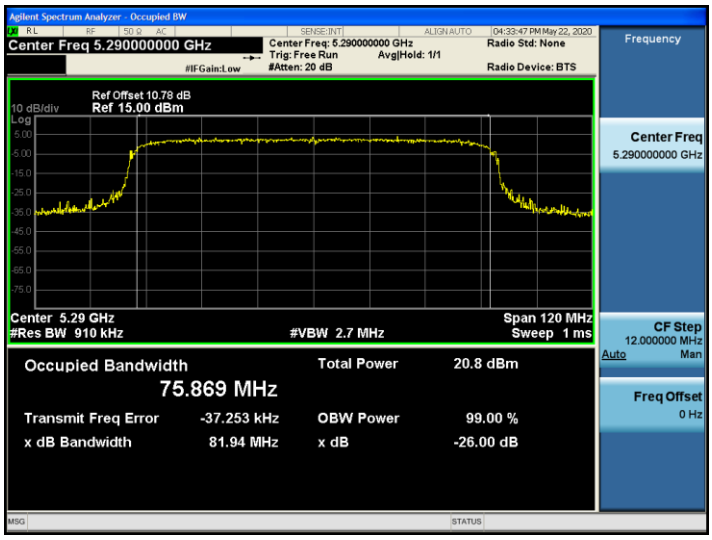
802.11ac_VHT80 UNII 2C BAND 26dB Bandwidth(CH 122)	**802.11ac_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)**
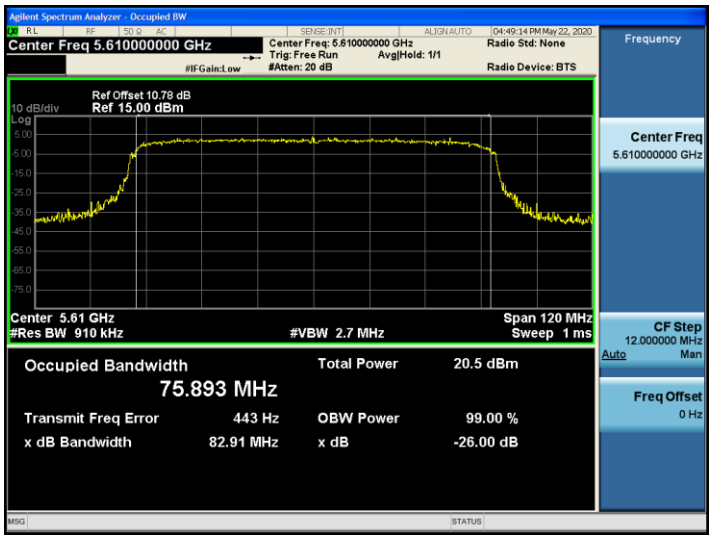	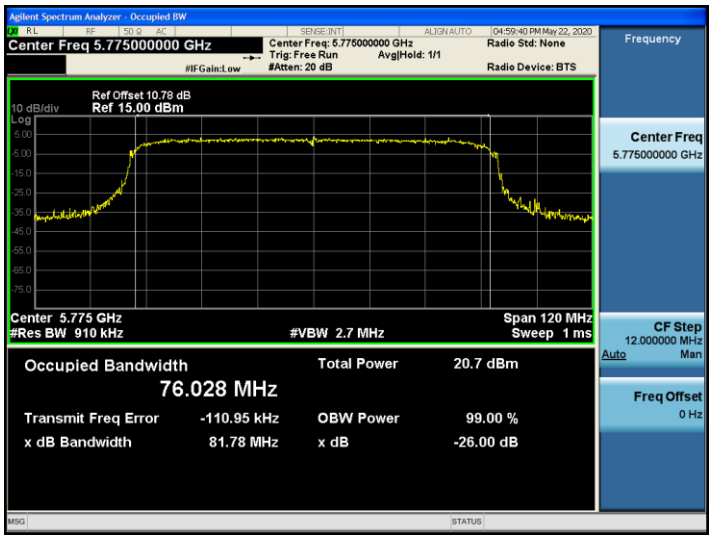

10.3 6dB BANDWIDTH

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.32	> 0.5	Pass
5785	157	16.08	> 0.5	Pass
5825	165	16.32	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.19	> 0.5	Pass
5785	157	17.08	> 0.5	Pass
5825	165	16.36	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.57	> 0.5	Pass
5795	159	35.64	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.40	> 0.5	Pass
5785	157	16.66	> 0.5	Pass
5825	165	16.57	> 0.5	Pass

802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.95	> 0.5	Pass
5795	159	35.54	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.24	> 0.5	Pass

▣ Test Plots

Note: In order to simplify the report, attached plots were only the most narrow channel.

802.11a (CH.157)

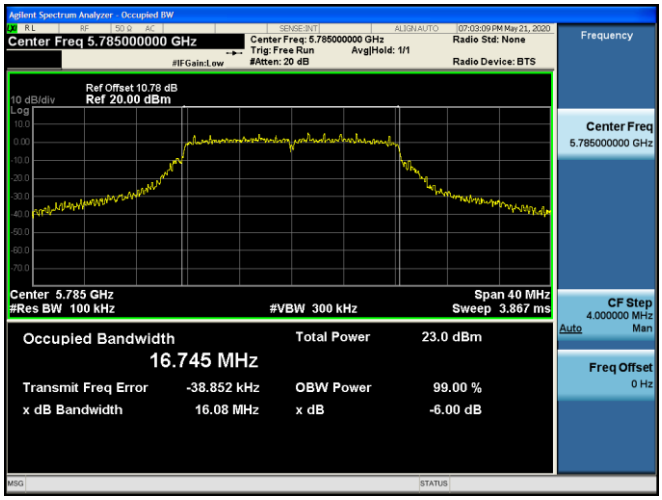

802.11n(HT20) (CH.165)

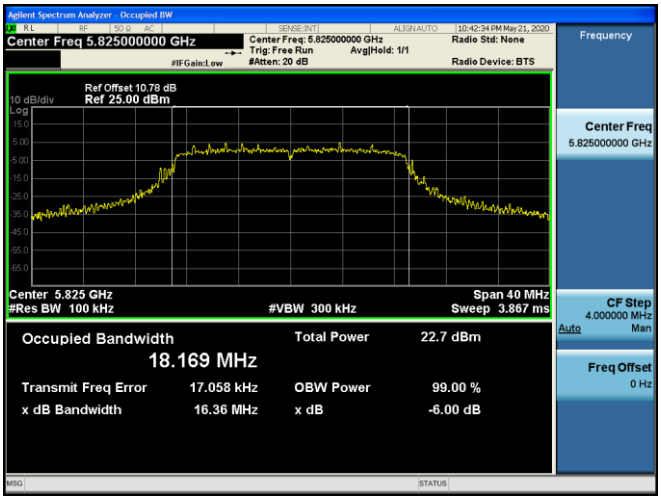

802.11n(HT40) (CH.151)

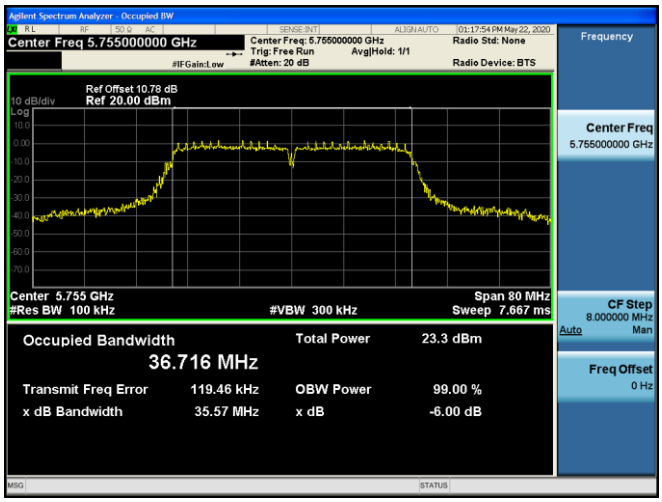

802.11ac(VHT20) (CH.149)

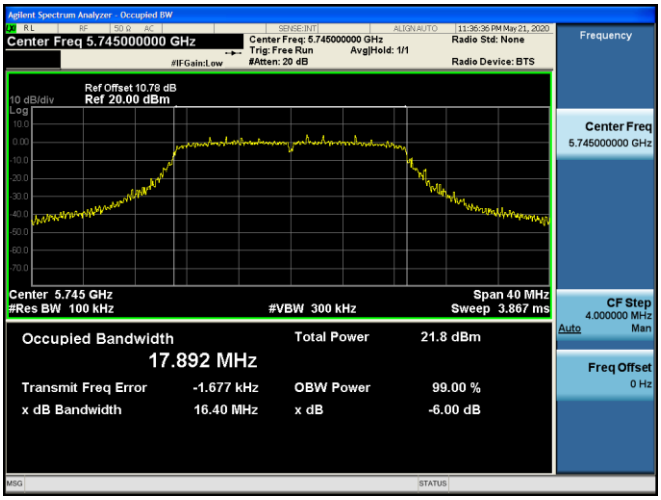

802.11ac(VHT40) (CH.159)

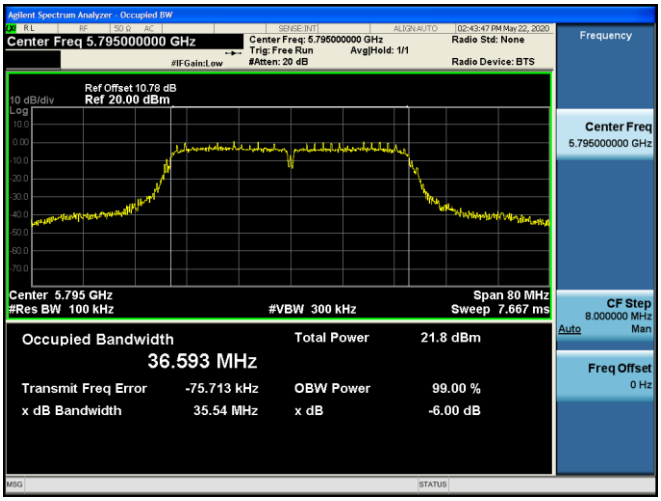

802.11ac(VHT80) (CH.155)

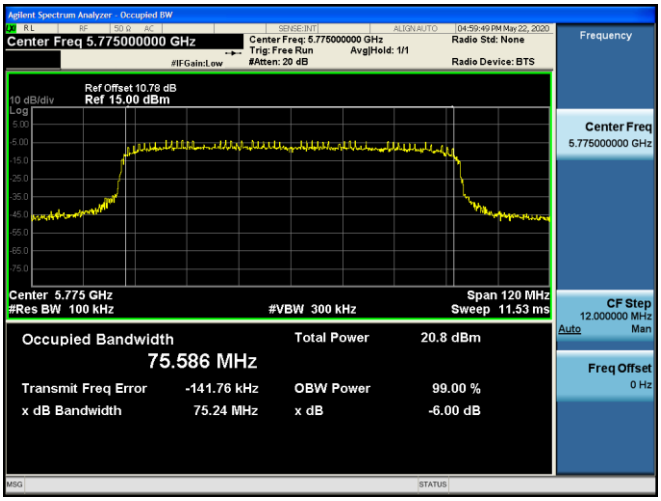

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

802.11a Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	16.00	16.25	1.176	17.42	23.98
5200	40	16.00	16.27	1.176	17.44	23.98
5240	48	16.00	15.67	1.500	17.17	23.98
5260	52	16.00	15.90	1.176	17.08	23.98
5300	60	16.00	16.39	0.843	17.23	23.98
5320	64	17.00	15.81	1.176	16.99	23.98
5500	100	17.00	15.64	1.500	17.14	23.98
5600	120	17.00	16.26	0.530	16.79	23.98
5720	144	17.00	16.13	1.500	17.63	23.98
5745	149	16.00	16.41	0.644	17.05	30.00
5785	157	16.00	15.50	1.500	17.00	30.00
5825	165	16.00	15.33	1.500	16.83	30.00

802.11n(20MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	16.00	15.74	1.594	17.34	23.98
5200	40	16.00	15.23	1.594	16.82	23.98
5240	48	16.00	14.84	1.594	16.44	23.98
5260	52	16.00	15.05	1.594	16.65	23.98
5300	60	16.00	15.28	1.594	16.87	23.98
5320	64	16.00	15.07	1.594	16.66	23.98
5500	100	17.00	15.62	1.594	17.21	23.98
5600	120	17.00	15.32	1.594	16.91	23.98
5720	144	17.00	15.45	1.594	17.04	23.98
5745	149	17.00	15.29	1.594	16.89	30.00
5785	157	17.00	15.28	1.594	16.87	30.00
5825	165	17.00	15.14	1.594	16.73	30.00

802.11n(40MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	16.00	14.42	1.157	15.58	23.98
5230	46	15.00	14.66	1.562	16.22	23.98
5270	54	15.00	14.40	2.020	16.42	23.98
5310	62	16.00	13.78	2.020	15.80	23.98
5510	102	16.00	14.03	2.020	16.05	23.98
5590	118	15.00	14.50	1.562	16.06	23.98
5710	142	15.00	14.90	2.020	16.92	23.98
5755	151	15.00	14.20	2.409	16.61	30.00
5795	159	15.00	14.19	2.020	16.21	30.00

802.11ac(20MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	14.00	14.54	1.190	15.73	23.98
5200	40	14.00	14.43	1.190	15.62	23.98
5240	48	14.00	13.76	1.190	14.95	23.98
5260	52	14.00	13.79	1.190	14.98	23.98
5300	60	14.00	13.97	1.190	15.16	23.98
5320	64	14.00	13.89	1.190	15.08	23.98
5500	100	14.00	14.46	0.719	15.18	23.98
5600	120	14.00	13.81	1.190	15.00	23.98
5720	144	14.00	14.20	1.497	15.70	23.98
5745	149	14.00	14.52	1.190	15.71	30.00
5785	157	14.00	14.68	0.814	15.50	30.00
5825	165	14.00	14.04	1.190	15.23	30.00

802.11ac(40MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	15.00	13.18	2.369	15.55	23.98
5230	46	14.00	12.49	2.369	14.86	23.98
5270	54	14.00	13.32	1.648	14.97	23.98
5310	62	15.00	13.21	2.369	15.58	23.98
5510	102	14.00	12.53	2.369	14.90	23.98
5590	118	14.00	12.76	2.369	15.13	23.98
5710	142	14.00	14.00	1.648	15.65	23.98
5755	151	14.00	13.30	2.369	15.67	30.00
5795	159	14.00	13.07	2.369	15.44	30.00

802.11ac(80MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	13.00	11.14	2.824	13.97	23.98
5290	58	13.00	10.99	2.824	13.82	23.98
5530	106	13.00	10.89	2.824	13.71	23.98
5610	122	13.00	10.79	2.824	13.61	23.98
5690	138	13.00	10.80	2.824	13.62	23.98
5775	155	13.00	11.15	2.824	13.98	30.00

10.5 POWER SPECTRAL DENSITY

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	5.445	1.176	6.621	11 dBm/MHz
5200	40	5.681	1.176	6.857	
5240	48	5.202	1.500	6.702	
5260	52	5.030	1.176	6.206	
5300	60	5.569	0.843	6.412	
5320	64	4.982	1.176	6.158	
5500	100	4.840	1.500	6.340	
5600	120	4.966	0.530	5.496	
5720	144	5.434	1.500	6.934	
5745	149	2.591	0.644	3.235	30 dBm/500kHz
5785	157	1.797	1.500	3.297	
5825	165	1.749	1.500	3.249	

802.11n(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	4.276	1.594	5.870	11 dBm/MHz
5200	40	4.293	1.594	5.887	
5240	48	3.944	1.594	5.538	
5260	52	4.181	1.594	5.775	
5300	60	4.554	1.594	6.148	
5320	64	4.282	1.594	5.876	
5500	100	4.878	1.594	6.472	
5600	120	3.922	1.594	5.516	
5720	144	4.490	1.594	6.084	
5745	149	1.834	1.594	3.428	30 dBm/500kHz
5785	157	1.760	1.594	3.354	
5825	165	1.430	1.594	3.024	

802.11n(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5190	38	0.422	1.157	1.579	11 dBm/MHz
5230	46	0.615	1.562	2.177	
5270	54	0.191	2.020	2.211	
5310	62	0.106	2.020	2.126	
5510	102	1.031	2.020	3.051	
5590	118	0.505	1.562	2.067	
5710	142	0.697	2.020	2.717	
5755	151	-2.118	2.409	0.291	30 dBm /500kHz
5795	159	-2.618	2.020	-0.598	

802.11ac(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	3.609	1.190	4.799	11 dBm/MHz
5200	40	3.518	1.190	4.708	
5240	48	2.758	1.190	3.948	
5260	52	2.659	1.190	3.849	
5300	60	2.890	1.190	4.080	
5320	64	2.822	1.190	4.012	
5500	100	3.301	0.719	4.020	
5600	120	3.052	1.190	4.242	
5720	144	3.301	1.497	4.798	
5745	149	0.650	1.190	1.840	30 dBm/500kHz
5785	157	0.791	0.814	1.605	
5825	165	0.176	1.190	1.366	

802.11ac(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5190	38	-0.001	2.369	2.368	11 dBm/MHz
5230	46	-1.329	2.369	1.040	
5270	54	-0.874	1.648	0.774	
5310	62	-0.617	2.369	1.752	
5510	102	-0.478	2.369	1.891	
5590	118	-1.401	2.369	0.968	
5710	142	-0.434	1.648	1.214	
5755	151	-2.825	2.369	-0.456	30 dBm/500kHz
5795	159	-3.462	2.369	-1.093	

802.11ac(80MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5210	42	-5.639	2.824	-2.815	11 dBm/MHz
5290	58	-5.813	2.824	-2.989	
5530	106	-5.994	2.824	-3.170	
5610	122	-5.888	2.824	-3.064	
5690	138	-6.177	2.824	-3.353	
5775	155	-8.378	2.824	-5.554	30 dBm/500kHz

▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only channel of highest power.

UNII 1 (Ch. 40)	UNII 2A (Ch. 60)
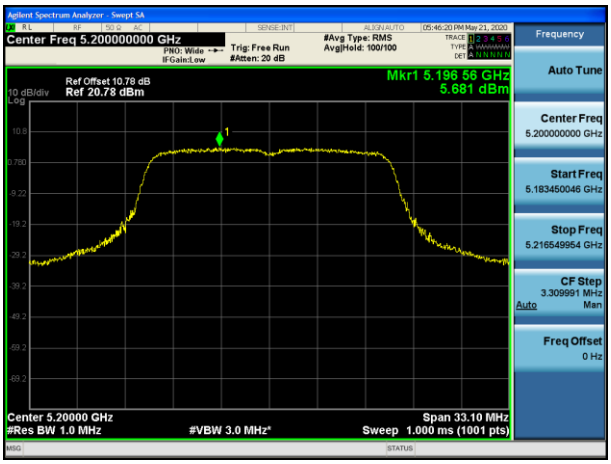	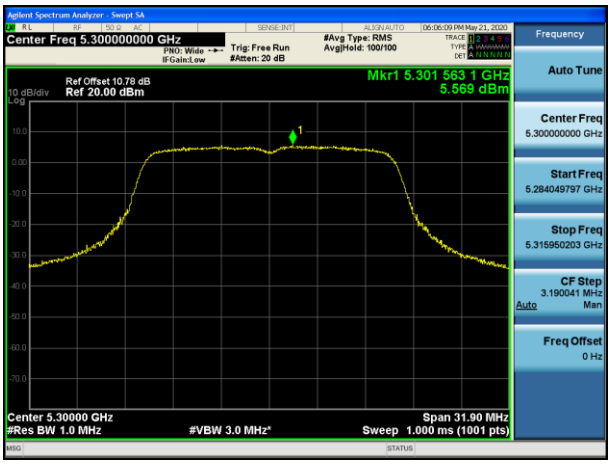

UNII 2C (Ch. 144)	UNII 3 (Ch. 157)
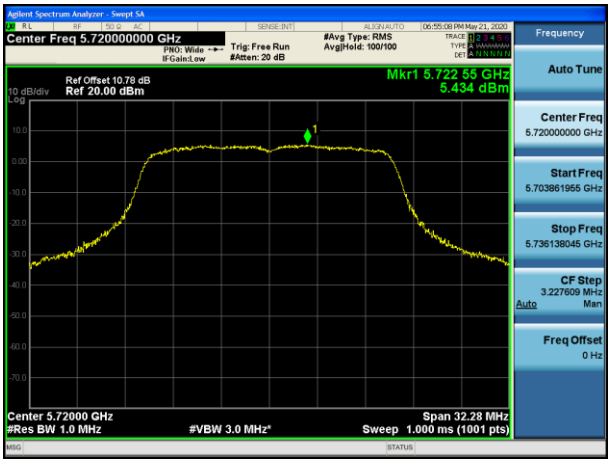	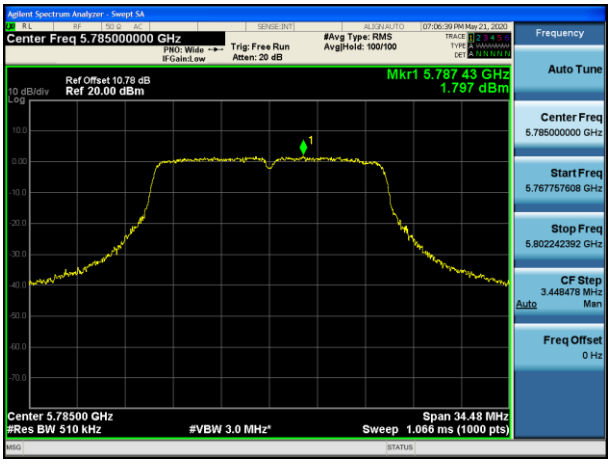

▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only channel of highest power.

UNII 1 (Ch. 40)	UNII 2A (Ch. 60)
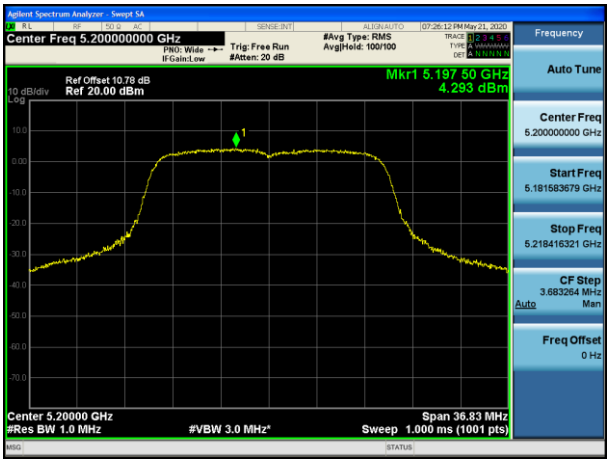	

UNII 2C (Ch. 100)	UNII 3 (Ch. 149)
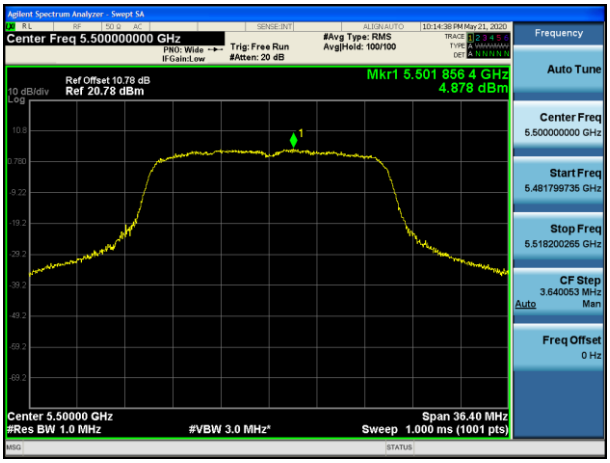	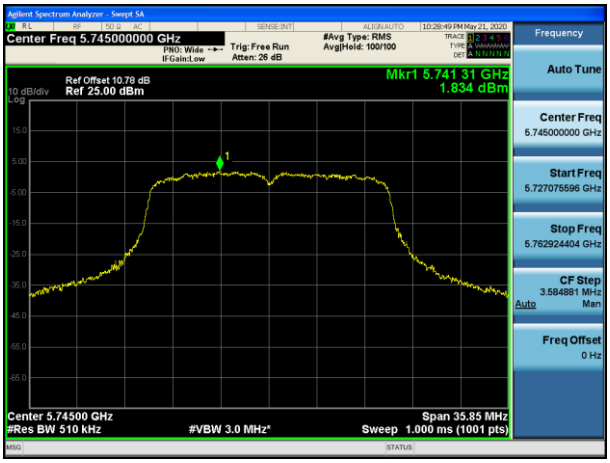

▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only channel of highest power.

UNII 1 (Ch. 46)	UNII 2A (Ch. 54)
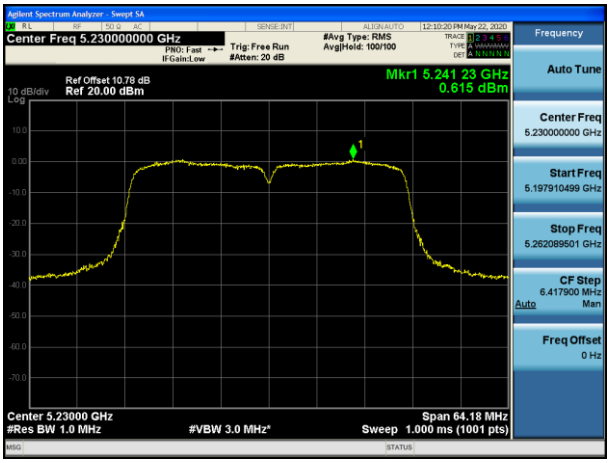	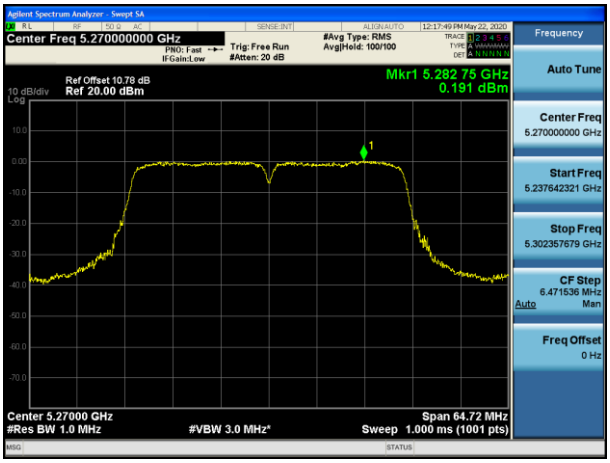

UNII 2C (Ch. 102)	UNII 3 (Ch. 151)
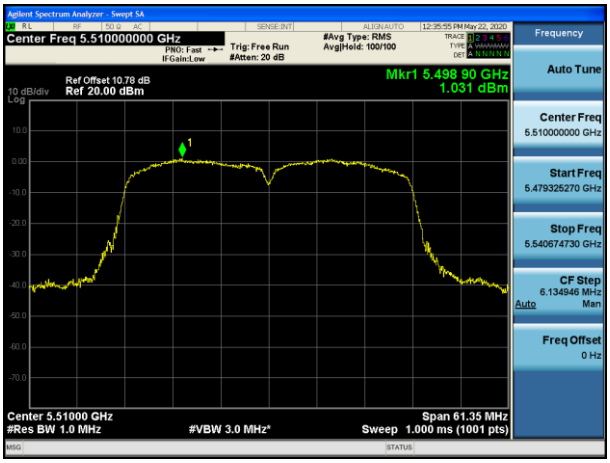	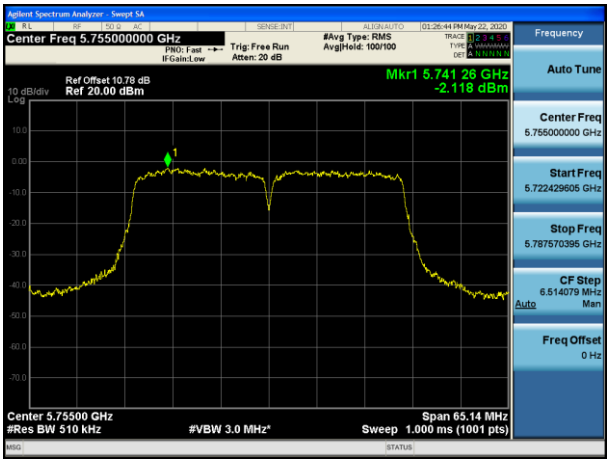

▣ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only channel of highest power.

UNII 1 (Ch. 36)	UNII 2A (Ch. 60)
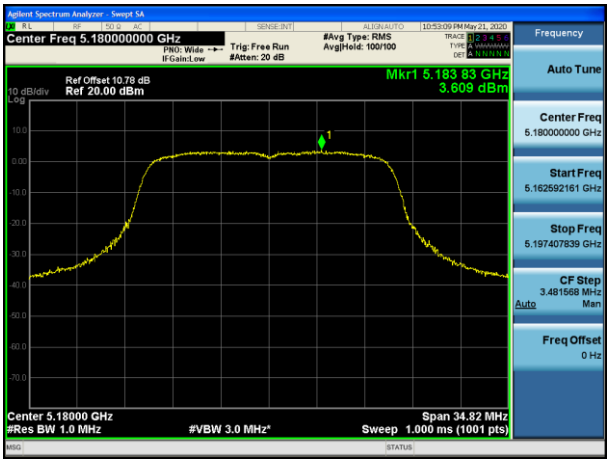	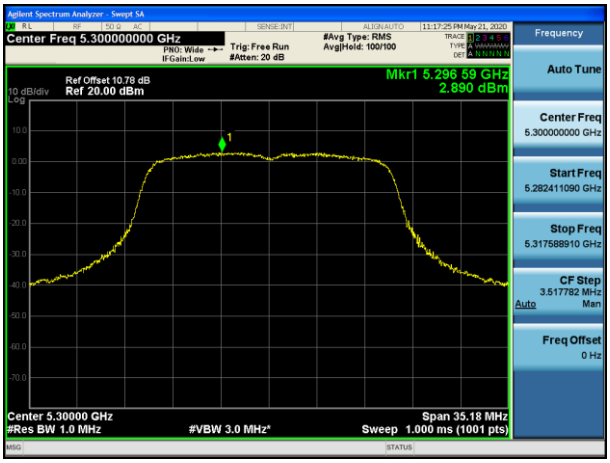
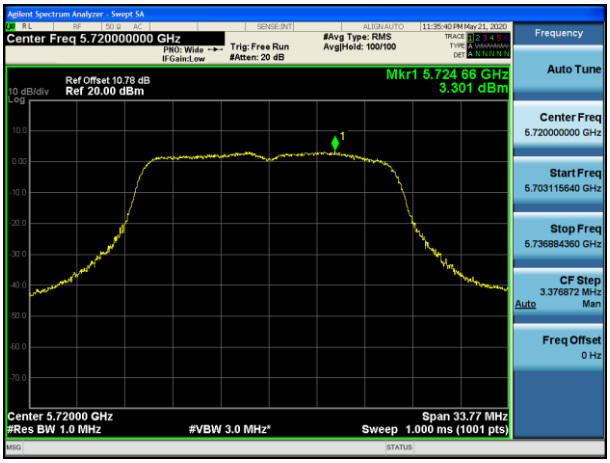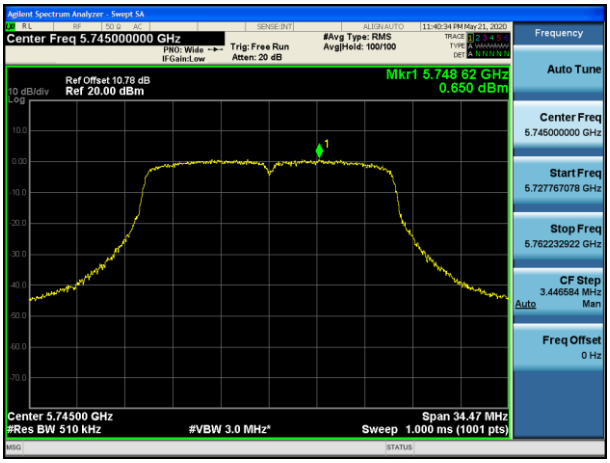
UNII 2C (Ch. 144)	UNII 3 (Ch. 149)