

# TEST REPORT

FCC DTS ax Test for SM-A566E/DS  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2412-FC078

**DATE OF ISSUE**  
December 23, 2024

**Tested by**  
Kyung Jun Woo



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

**REPORT NO.**

HCT-RF-2412-FC078

**DATE OF ISSUE**

December 23, 2024

**Additional Model**

SM-A566E

**Applicant**

**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name**

Mobile Phone

**Model Name**

SM-A566E/DS

**FCC ID**

A3LSMA566E

**Date of Test**

November 07, 2024 ~ December 23, 2024

**FCC Classification**

Digital Transmission System(DTS)

**Test Standard Used**

FCC Rule Part(s): Part 15.247

**Test Results**

PASS

**Location of Test**

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue     | Description     |
|--------------|-------------------|-----------------|
| 0            | December 23, 2024 | Initial Release |

## Notice

### Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

## CONTENTS

|                                              |    |
|----------------------------------------------|----|
| 1. EUT DESCRIPTION                           | 5  |
| ANTENNA CONFIGURATIONS                       | 6  |
| 2. TEST METHODOLOGY                          | 8  |
| EUT CONFIGURATION                            | 8  |
| EUT EXERCISE                                 | 8  |
| GENERAL TEST PROCEDURES                      | 8  |
| DESCRIPTION OF TEST MODES                    | 8  |
| 3. INSTRUMENT CALIBRATION                    | 9  |
| 4. FACILITIES AND ACCREDITATIONS             | 9  |
| FACILITIES                                   | 9  |
| EQUIPMENT                                    | 9  |
| 5. ANTENNA REQUIREMENTS                      | 10 |
| 6. MEASUREMENT UNCERTAINTY                   | 10 |
| 7. DESCRIPTION OF TESTS                      | 11 |
| 8. SUMMARY TEST OF RESULTS                   | 29 |
| 9. TEST RESULT                               | 30 |
| 9.1 DUTY CYCLE                               | 30 |
| 9.2 6 dB BANDWIDTH                           | 33 |
| 9.3 OUTPUT POWER                             | 37 |
| 9.4 POWER SPECTRAL DENSITY                   | 43 |
| 9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS | 48 |
| 9.6 RADIATED SPURIOUS EMISSIONS              | 58 |
| 9.7 RADIATED RESTRICTED BAND EDGES           | 62 |
| 10. LIST OF TEST EQUIPMENT                   | 68 |
| 11. ANNEX A_ TEST SETUP PHOTO                | 70 |

## 1. EUT DESCRIPTION

|                              |                                                   |                        |           |
|------------------------------|---------------------------------------------------|------------------------|-----------|
| <b>Model</b>                 | SM-A566E/DS                                       |                        |           |
| <b>Additional Model</b>      | SM-A566E                                          |                        |           |
| <b>EUT Type</b>              | Mobile Phone                                      |                        |           |
| <b>Power Supply</b>          | DC 4.20 V                                         |                        |           |
| <b>Frequency Range</b>       | 2 412 MHz ~ 2 472 MHz                             |                        |           |
| <b>Max. RF Output Power</b>  | <u>Peak Power</u>                                 | SISO(Ant.1)            | 25.94 dBm |
|                              |                                                   | SISO(Ant.2)            | 24.12 dBm |
|                              |                                                   | MIMO_SDM(Ant.1+ Ant.2) | 26.93 dBm |
|                              | <u>Average Power</u>                              | SISO(Ant.1)            | 16.85 dBm |
|                              |                                                   | SISO(Ant.2)            | 14.77 dBm |
|                              |                                                   | MIMO_SDM(Ant.1+ Ant.2) | 18.09 dBm |
| <b>Modulation Type</b>       | OFDM, OFDMA                                       |                        |           |
| <b>Number of Channels</b>    | 13 Channels                                       |                        |           |
| <b>Antenna Specification</b> | Type: Metal                                       |                        |           |
| <b>Serial number</b>         | Conducted : R3CX90QEV1T<br>Radiated : R3CXB08Q3KA |                        |           |

## ANTENNA CONFIGURATIONS

### 1. Antenna configuration

| Configurations | SISO  |       | MIMO |     |
|----------------|-------|-------|------|-----|
|                | ANT.1 | ANT.2 | CDD  | SDM |
| 802.11ax       | O     | O     | X    | O   |

#### **Note:**

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz bands simultaneously on each antenna.

| Simultaneous transmission<br>Scenario | 2.4 GHz<br>WiFi<br>Ant.1 | 2.4 GHz<br>WiFi<br>Ant.2 | 5 GHz<br>WiFi<br>Ant.1 | 5 GHz<br>WiFi<br>Ant.2 | Bluetooth<br>Ant.1 | Bluetooth<br>Ant.2 | Test Case |
|---------------------------------------|--------------------------|--------------------------|------------------------|------------------------|--------------------|--------------------|-----------|
| Bluetooth ANT.1 +<br>5 GHz WiFi ANT.2 |                          |                          |                        | on                     | on                 |                    |           |
| Bluetooth ANT.1 +<br>5 GHz WiFi MIMO  |                          |                          | on                     | on                     | on                 |                    | Scenario1 |

### 3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

| Ant Gain (dBi) |        | N <sub>ANT</sub> / N <sub>SS</sub> | Directional Gain (dBi) |       |
|----------------|--------|------------------------------------|------------------------|-------|
|                |        |                                    | CDD                    | SDM   |
| ANT.1          | -8.70  | 2/2                                | -6.41                  | -8.70 |
| ANT.2          | -10.20 |                                    |                        |       |

#### Note

According to ANSI C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where G<sub>N</sub> is the gain of the nth antenna and N<sub>ANT</sub> is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log \left( \left( 10^{(\text{ANT.0 Gain}/20)} + 10^{(\text{ANT.1 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT} / N_{SS})$$

#### Sample MIMO Calculation:

Ex) ANT.1 : 11.58 dBm ANT.2 : 12.08 dBm

$$\text{MIMO} = \text{ANT.1} + \text{ANT.2}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter           | Expanded Uncertainty ( $\pm$ kHz)        |
|---------------------|------------------------------------------|
| X dB, 99% Bandwidth | 95 (Confidence level about 95 %, $k=2$ ) |
| Frequency stability | 28 (Confidence level about 95 %, $k=2$ ) |


  

| Parameter                                | Expanded Uncertainty ( $\pm$ dB)           |
|------------------------------------------|--------------------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.98 (Confidence level about 95 %, $k=2$ ) |
| Conducted Output Power(Power Meter)      | 0.54 (Confidence level about 95 %, $k=2$ ) |
| Conducted Output Power(Signal Analyzer)  | 0.68 (Confidence level about 95 %, $k=2$ ) |
| Power Spectral Density                   | 1.03 (Confidence level about 95 %, $k=2$ ) |
| Band Edge (Out of Band Emissions)        | 0.70 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.36 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.70 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.52 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.66 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (Above 40 GHz)      | 5.58 (Confidence level about 95 %, $k=2$ ) |

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{\text{total}}$  and  $T_{\text{on}}$
8. Calculate Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6 dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

##### Test Configuration



##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

##### Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


## 7.5. Conducted Band Edge (Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Allow trace to fully stabilize.
- 8) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

### Factors for frequency

| Freq(MHz) | Factor(dB)   |
|-----------|--------------|
| 30        | 10.30        |
| 100       | 10.37        |
| 200       | 10.40        |
| 300       | 10.38        |
| 400       | 10.49        |
| 500       | 10.57        |
| 600       | 10.60        |
| 700       | 10.74        |
| 800       | 10.86        |
| 900       | 10.96        |
| 1000      | 10.98        |
| 2000      | 10.98        |
| 2400      | <b>11.02</b> |
| 2500      | <b>11.02</b> |
| 3000      | 11.44        |
| 4000      | 11.52        |
| 5000      | 12.02        |
| 5850      | 12.02        |
| 6000      | 12.16        |
| 7000      | 12.17        |
| 8000      | 12.21        |
| 9000      | 12.28        |
| 10000     | 12.27        |
| 11000     | 12.30        |
| 12000     | 12.32        |
| 13000     | 12.45        |
| 14000     | 12.40        |
| 15000     | 12.46        |
| 16000     | 12.50        |
| 17000     | 12.54        |
| 18000     | 12.60        |
| 19000     | 12.64        |
| 20000     | 12.66        |
| 21000     | 12.70        |
| 22000     | 12.77        |
| 23000     | 12.81        |
| 24000     | 12.82        |
| 25000     | 12.86        |

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


## 7.6. Radiated Test

### Limit


| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 – 0.490   | $2400/F(\text{kHz})$               | 300                      |
| 0.490 – 1.705   | $24000/F(\text{kHz})$              | 30                       |
| 1.705 – 30      | 30                                 | 30                       |
| 30-88           | 100                                | 3                        |
| 88-216          | 150                                | 3                        |
| 216-960         | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

### Test Configuration


Below 30 MHz

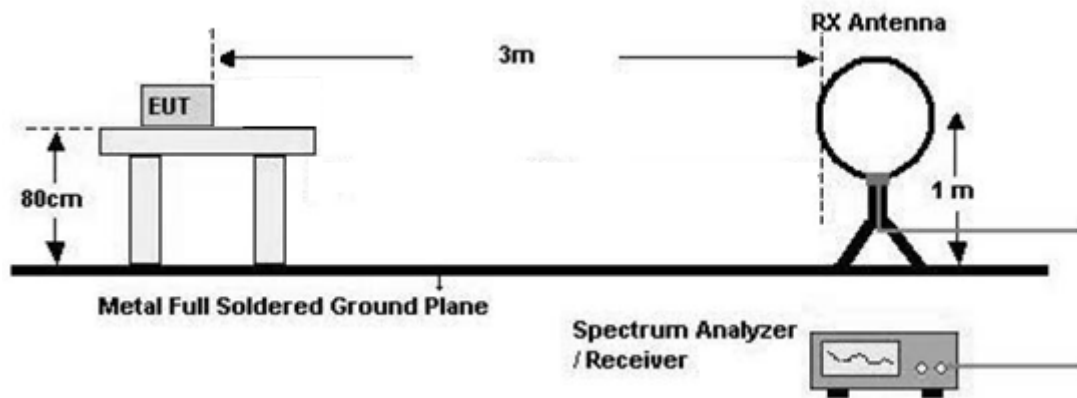

30 MHz - 1 GHz

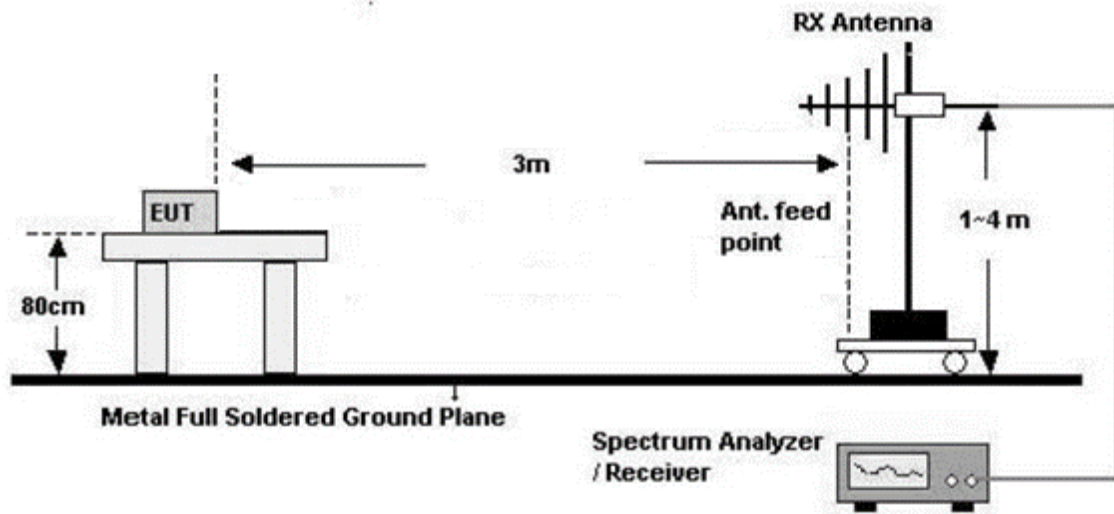

Above 1 GHz

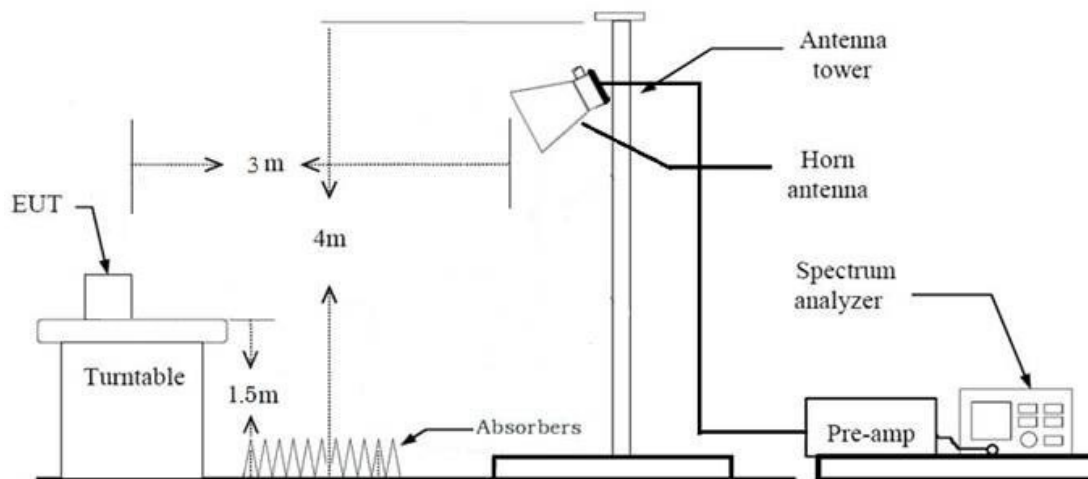

**Test Procedure of Radiated spurious emissions (Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions (Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

**(2) Measurement Type(Quasi-peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

**(1) Measurement Type(Peak):**

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold

- RBW = 1 MHz

- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average): Duty cycle  $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW  $\geq 3 \times$  RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle  $< 98 \%$ , duty cycle variations are less than  $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW  $\geq 3 \times$  RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98 \%$ )

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $< 98 \%$ )

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

+ Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq 98 \%$ ,
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
  - (3) Measurement Type(Average): Duty cycle  $< 98 \%$ , duty cycle variations are less than  $\pm 2 \%$ 
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions

from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total (Measurement Type : Peak)

= Peak Measured Value

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Average Measured Value

Total(Measurement Type : Average, Duty cycle < 98 %)

= Average Measured Value + Duty Cycle Factor

- We apply to the offset in the range 1 GHz - 18 GHz.
- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V)     |                         |
|-----------------------|-------------------------|-------------------------|
|                       | Quasi-peak              | Average                 |
| 0.15 to 0.50          | 66 to 56 <sup>(a)</sup> | 56 to 46 <sup>(a)</sup> |
| 0.50 to 5             | 56                      | 46                      |
| 5 to 30               | 60                      | 50                      |

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak (Final Result) = Measured Value + Correction Factor

**7.8. Test RU offset for Tones**

| BW<br>(MHz) | Tones<br>(T) | RU offset | Test RU offset |     |      |
|-------------|--------------|-----------|----------------|-----|------|
|             |              |           | Low            | Mid | High |
| 20          | 26           | 0~8       | 0              | 4   | 8    |
|             | 52           | 37~40     | 37             | 38  | 40   |
|             | 106          | 53~54     | 53             | -   | 54   |
|             | 242          | 61        | -              | 61  | -    |

## 7.9. Worst case configuration and mode

### Conducted test

1. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS0)

2. Band Edge (Conducted)

: All Mode (Channel, Tones, RU Offset) of operation were investigated and the worst case configuration results are reported.

| Tones | Channel       | RU Index |
|-------|---------------|----------|
| 26    | 1             | 0        |
|       | 11, 12 ,13    | 8        |
| 52    | 1             | 37       |
|       | 11, 12 ,13    | 40       |
| 106   | 1             | 53       |
|       | 11, 12, 13    | 54       |
| 242   | 1, 11, 12, 13 | 61       |
| SU    | 1, 11, 12, 13 | -        |

3. SM-A566E/DS, SM-A566E were tested and the worst case results are reported.

(Worst case: SM-A566E/DS)

**Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories (Earphone, etc)
  - Worst case : Stand alone
2. All data rate of operation were investigated and the worst case results are reported.  
(Worst case : MCS 0)
3. All Antenna of operation were investigated and the worst case results are reported
  - Antenna Operation Type : SISO\_Ant.1, SISO\_Ant.2, MIMO\_SDM(Ant.1+Ant.2)
  - Worstcase: MIMO\_SDM(Ant.1+Ant.2)
4. EUT Axis
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : Y
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported
7. SM-A566E/DS, SM-A566E were tested and the worst case results are reported.  
(Worst case: SM-A566E/DS)

**[RSE Worst case]**

| BW<br>(MHz) | Test | Tones<br>(T) | Offset |
|-------------|------|--------------|--------|
| 20          | RSE  | 26           | 4      |
|             |      | SU           | -      |

**[Bandedge Worst case]**

| BW<br>(MHz) | Test      | Tones<br>(T) | Offset |       |
|-------------|-----------|--------------|--------|-------|
|             |           |              | Lower  | Upper |
| 20          | Band Edge | 26           | 0      | 8     |
|             |           | 52           | 37     | 40    |
|             |           | 106          | 53     | 54    |
|             |           | 242          | 61     | 61    |
|             |           | SU           | -      | -     |

**Radiated test(Simultaneous transmission Scenario)**

1. Please refer to the [BT], [UNII] Test Report.
2. SM-A566E/DS, SM-A566E were tested and the worst case results are reported.  
(Worst case: SM-A566E/DS)

**AC Power line Conducted Emissions**

1. Please refer to the [DTS] Test Report.
2. SM-A566E/DS, SM-A566E were tested and the worst case results are reported.  
(Worst case: SM-A566E/DS)

## 8. SUMMARY TEST OF RESULTS

| Test Description                     | FCC Part Section(s)               | Test Limit           | Test Condition | Test Result     |
|--------------------------------------|-----------------------------------|----------------------|----------------|-----------------|
| 6 dB Bandwidth                       | § 15.247(a)(2)                    | > 500 kHz            | Conducted      | PASS            |
| Conducted Maximum Output Power       | § 15.247(b)(3)                    | < 1 Watt             |                | PASS            |
| Power Spectral Density               | § 15.247(e)                       | < 8 dBm / 3 kHz Band |                | PASS            |
| Band Edge<br>(Out of Band Emissions) | § 15.247(d)                       | Conducted > 30 dBc   |                | PASS            |
| AC Power line Conducted Emissions    | § 15.207                          | cf. Section 7.7      |                | PASS<br>(Note1) |
| Radiated Spurious Emissions          | § 15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      | Radiated       | PASS            |
| Radiated Restricted Band Edge        | § 15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      |                | PASS            |

### **Note1:**

1. Please refer to the [DTS] Test Report.

## 9. TEST RESULT

### 9.1 DUTY CYCLE

#### [SISO]

| Mode               | Tone<br>(T) | Worst Data rate | T <sub>on</sub><br>(ms) | T <sub>total</sub><br>(ms) | Duty Cycle | Duty Cycle Factor<br>(dB) |
|--------------------|-------------|-----------------|-------------------------|----------------------------|------------|---------------------------|
| 802.11ax<br>(HE20) | 26          | MCS0            | 5.504                   | 5.654                      | 0.973      | 0.117                     |
|                    | 52          | MCS0            | 5.132                   | 5.272                      | 0.973      | 0.117                     |
|                    | 106         | MCS0            | 2.448                   | 2.591                      | 0.945      | 0.247                     |
|                    | 242         | MCS0            | 1.106                   | 1.243                      | 0.890      | 0.507                     |
| 802.11ax(SU)       | BW 20       | MCS0            | 1.107                   | 1.243                      | 0.891      | 0.503                     |

#### [MIMO\_SDM(Ant.1+Ant.2)]

| Mode               | Tone<br>(T) | Worst Data rate | T <sub>on</sub><br>(ms) | T <sub>total</sub><br>(ms) | Duty Cycle | Duty Cycle Factor<br>(dB) |
|--------------------|-------------|-----------------|-------------------------|----------------------------|------------|---------------------------|
| 802.11ax<br>(HE20) | 26          | MCS0            | 5.150                   | 5.267                      | 0.978      | 0.098                     |
|                    | 52          | MCS0            | 2.608                   | 2.709                      | 0.963      | 0.165                     |
|                    | 106         | MCS0            | 1.268                   | 1.402                      | 0.904      | 0.436                     |
|                    | 242         | MCS0            | 0.593                   | 0.730                      | 0.813      | 0.900                     |
| 802.11ax(SU)       | BW 20       | MCS0            | 0.592                   | 0.728                      | 0.813      | 0.900                     |


## Test Plots

### Note:


In order to simplify the report, attached plots were only the lowest data rate.

[SISO]


26 Tones (MCS 0)

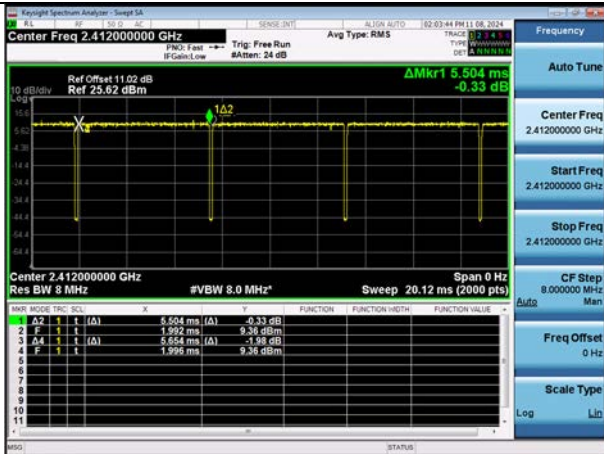


52 Tones (MCS 0)

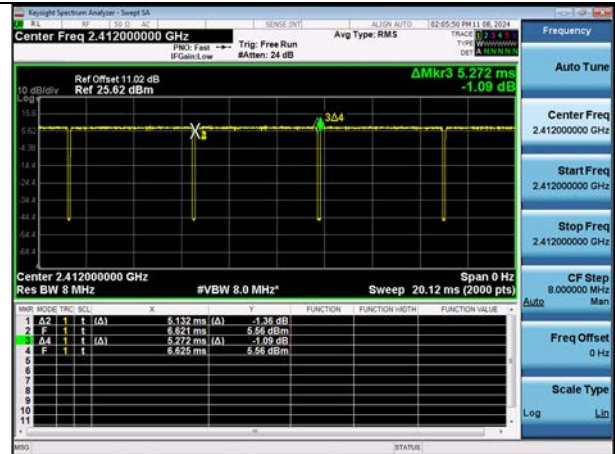


106 Tones (MCS 0)

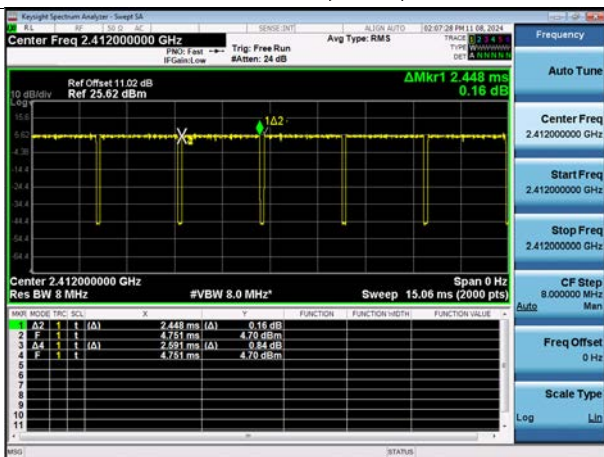

242 Tones (MCS 0)

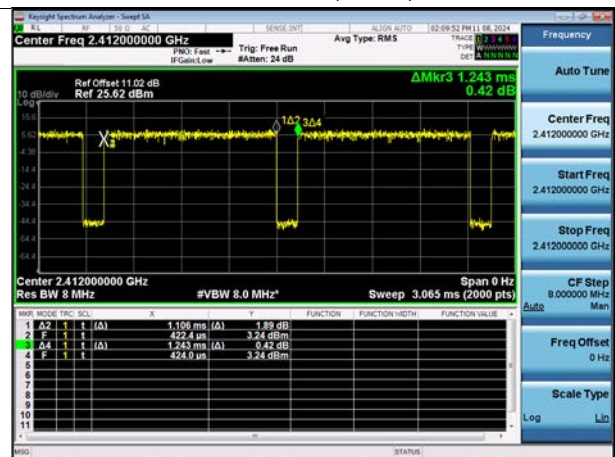


SU (MCS 0)

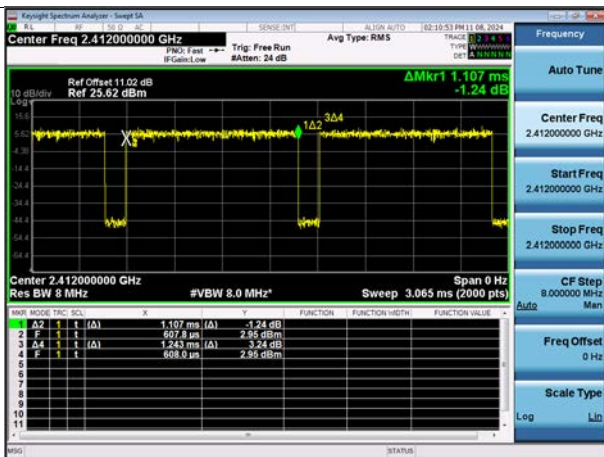


[MIMO\_SDM(Ant.1+Ant.2)]


26 Tones (MCS 0)

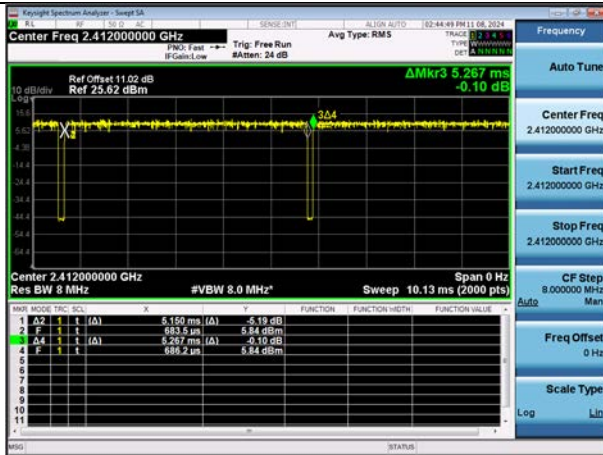


52 Tones (MCS 0)

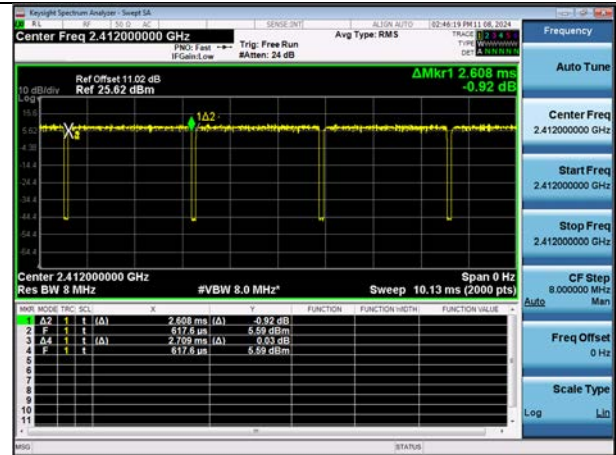


106 Tones (MCS 0)

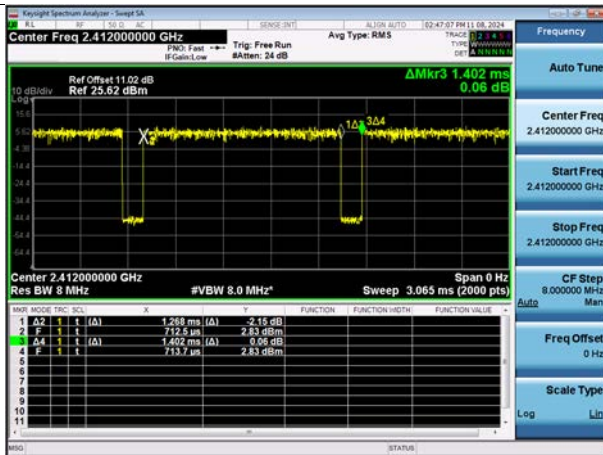

242 Tones (MCS 0)

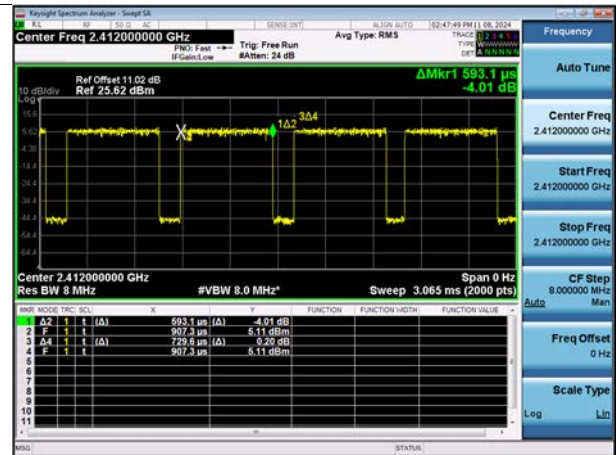

SU (MCS 0)

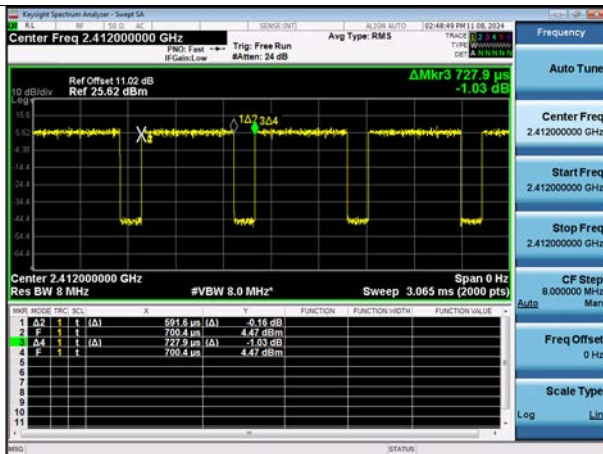

## 9.2 6 dB BANDWIDTH

# Limit : > 500 kHz

[Ant. 1]

| Mode         | Freq.<br>[MHz] | CH. | 6dB Bandwidth [MHz] |                   |                    | 99% Occupied Bandwidth [MHz] |                   |                    |
|--------------|----------------|-----|---------------------|-------------------|--------------------|------------------------------|-------------------|--------------------|
|              |                |     | RU Index :<br>Low   | RU Index :<br>Mid | RU Index :<br>High | RU Index :<br>Low            | RU Index :<br>Mid | RU Index :<br>High |
|              |                |     | ANT1                | ANT1              | ANT1               | ANT1                         | ANT1              | ANT1               |
| HE20<br>26T  | 2412           | 1   | 15.74               | 2.657             | 13.25              | 17.933                       | 15.357            | 17.723             |
|              | 2437           | 6   | 17.00               | 2.690             | 8.221              | 18.073                       | 15.746            | 17.698             |
|              | 2462           | 11  | 14.49               | 2.686             | 14.50              | 17.854                       | 15.852            | 17.673             |
|              | 2467           | 12  | 14.47               | 2.691             | 11.99              | 17.940                       | 15.659            | 17.803             |
|              | 2472           | 13  | 14.48               | 2.677             | 14.49              | 17.760                       | 15.385            | 17.795             |
| HE20<br>52T  | 2412           | 1   | 15.59               | 7.868             | 15.68              | 17.706                       | 15.610            | 17.447             |
|              | 2437           | 6   | 16.99               | 10.36             | 11.93              | 17.918                       | 15.998            | 17.393             |
|              | 2462           | 11  | 15.70               | 6.671             | 14.43              | 17.756                       | 16.008            | 17.644             |
|              | 2467           | 12  | 16.96               | 7.863             | 15.66              | 17.761                       | 15.989            | 17.594             |
|              | 2472           | 13  | 15.72               | 9.104             | 14.39              | 17.585                       | 15.692            | 17.575             |
| HE20<br>106T | 2412           | 1   | 14.56               | -                 | 15.22              | 17.508                       | -                 | 17.496             |
|              | 2437           | 6   | 16.46               | -                 | 15.70              | 17.718                       | -                 | 17.439             |
|              | 2462           | 11  | 16.86               | -                 | 15.00              | 17.626                       | -                 | 17.628             |
|              | 2467           | 12  | 16.47               | -                 | 15.41              | 17.642                       | -                 | 17.573             |
|              | 2472           | 13  | 14.99               | -                 | 14.24              | 17.458                       | -                 | 17.510             |
| HE20<br>242T | 2412           | 1   | -                   | 15.12             | -                  | -                            | 18.682            | -                  |
|              | 2437           | 6   | -                   | 16.48             | -                  | -                            | 18.803            | -                  |
|              | 2462           | 11  | -                   | 16.05             | -                  | -                            | 18.782            | -                  |
|              | 2467           | 12  | -                   | 15.60             | -                  | -                            | 18.767            | -                  |
|              | 2472           | 13  | -                   | 15.12             | -                  | -                            | 18.667            | -                  |
| HE20<br>SU   | 2412           | 1   | -                   | 15.12             | -                  | -                            | 18.678            | -                  |
|              | 2437           | 6   | -                   | 16.74             | -                  | -                            | 18.744            | -                  |
|              | 2462           | 11  | -                   | 15.90             | -                  | -                            | 18.830            | -                  |
|              | 2467           | 12  | -                   | 16.29             | -                  | -                            | 18.749            | -                  |
|              | 2472           | 13  | -                   | 15.12             | -                  | -                            | 18.661            | -                  |

**[Ant. 2]**


| Mode         | Freq.<br>[MHz] | CH. | 6dB Bandwidth [MHz] |                |                 | 99% Occupied Bandwidth [MHz] |                |                 |
|--------------|----------------|-----|---------------------|----------------|-----------------|------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low      | RU Index : Mid | RU Index : High | RU Index : Low               | RU Index : Mid | RU Index : High |
|              |                |     | ANT2                | ANT2           | ANT2            | ANT2                         | ANT2           | ANT2            |
| HE20<br>26T  | 2412           | 1   | 15.74               | 2.665          | 11.99           | 17.991                       | 15.610         | 17.735          |
|              | 2437           | 6   | 14.50               | 2.647          | 14.50           | 17.846                       | 15.529         | 17.749          |
|              | 2462           | 11  | 14.53               | 2.683          | 14.51           | 17.809                       | 15.733         | 17.823          |
|              | 2467           | 12  | 14.50               | 2.695          | 13.25           | 17.810                       | 15.642         | 17.797          |
|              | 2472           | 13  | 14.49               | 2.646          | 15.78           | 17.683                       | 15.362         | 17.777          |
| HE20<br>52T  | 2412           | 1   | 15.68               | 10.37          | 13.21           | 17.758                       | 16.003         | 17.571          |
|              | 2437           | 6   | 15.72               | 7.839          | 15.73           | 17.690                       | 15.922         | 17.604          |
|              | 2462           | 11  | 15.72               | 9.126          | 15.70           | 17.701                       | 15.937         | 17.685          |
|              | 2467           | 12  | 15.65               | 7.887          | 14.29           | 17.635                       | 15.877         | 17.645          |
|              | 2472           | 13  | 14.49               | 6.673          | 15.58           | 17.533                       | 15.730         | 17.681          |
| HE20<br>106T | 2412           | 1   | 16.91               | -              | 13.81           | 17.658                       | -              | 17.534          |
|              | 2437           | 6   | 16.29               | -              | 14.78           | 17.580                       | -              | 17.553          |
|              | 2462           | 11  | 16.32               | -              | 16.74           | 17.582                       | -              | 17.598          |
|              | 2467           | 12  | 16.66               | -              | 16.30           | 17.554                       | -              | 17.584          |
|              | 2472           | 13  | 15.16               | -              | 14.15           | 17.365                       | -              | 17.563          |
| HE20<br>242T | 2412           | 1   | -                   | 16.05          | -               | -                            | 18.741         | -               |
|              | 2437           | 6   | -                   | 15.73          | -               | -                            | 18.737         | -               |
|              | 2462           | 11  | -                   | 16.59          | -               | -                            | 18.759         | -               |
|              | 2467           | 12  | -                   | 15.42          | -               | -                            | 18.708         | -               |
|              | 2472           | 13  | -                   | 15.24          | -               | -                            | 18.643         | -               |
| HE20<br>SU   | 2412           | 1   | -                   | 16.04          | -               | -                            | 18.787         | -               |
|              | 2437           | 6   | -                   | 15.78          | -               | -                            | 18.837         | -               |
|              | 2462           | 11  | -                   | 16.22          | -               | -                            | 18.760         | -               |
|              | 2467           | 12  | -                   | 16.46          | -               | -                            | 18.741         | -               |
|              | 2472           | 13  | -                   | 15.40          | -               | -                            | 18.601         | -               |

## ☐ Test Plots

**Note:** In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

[Ant. 1]


**BW20M Ch.1(2412 MHz) RU 4**

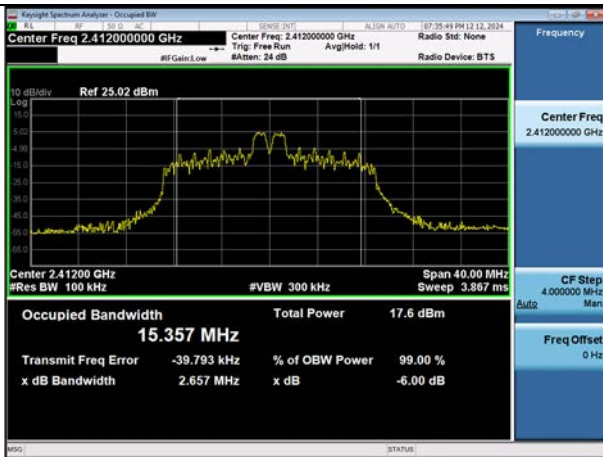


**BW20M Ch.6(2437 MHz) RU 4**




**BW20M Ch.11(2462 MHz) RU 4**

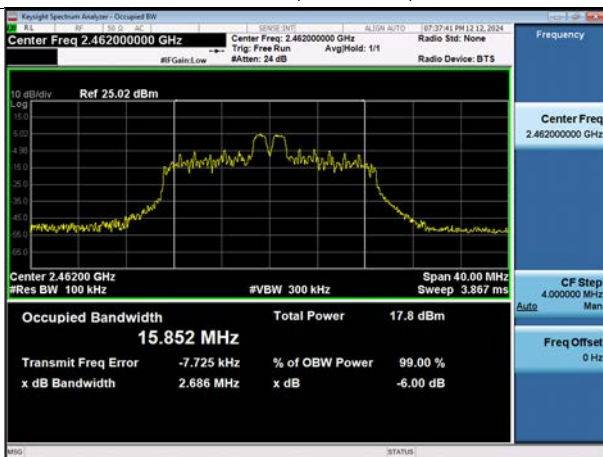

**BW20M Ch.12(2467 MHz) RU 4**

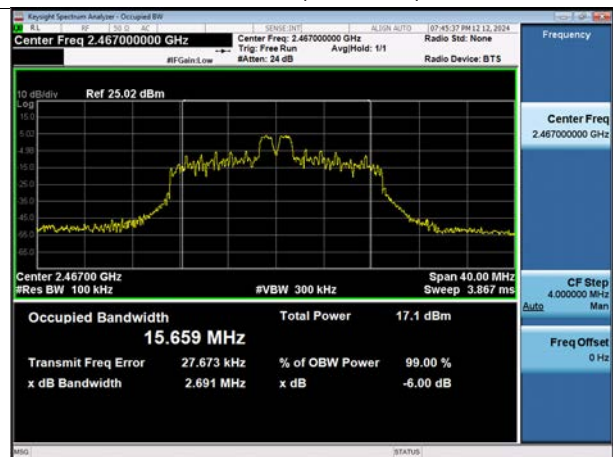


**BW20M Ch.13(2472 MHz) RU 4**

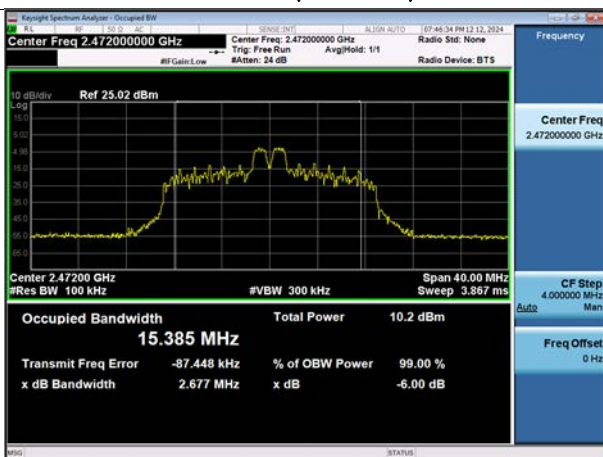


[Ant. 2]


BW20M Ch.1(2412 MHz) RU 4

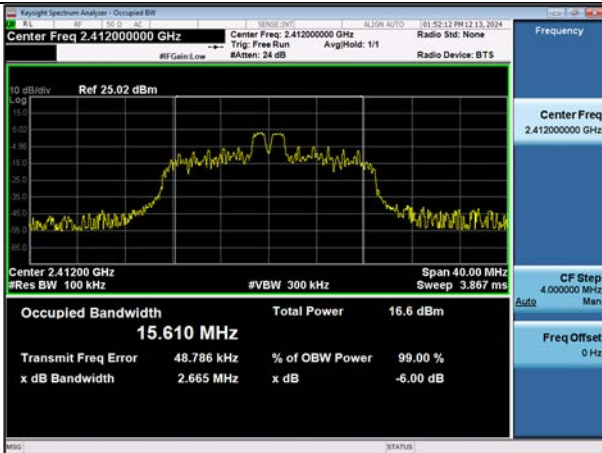


BW20M Ch.6(2437 MHz) RU 4

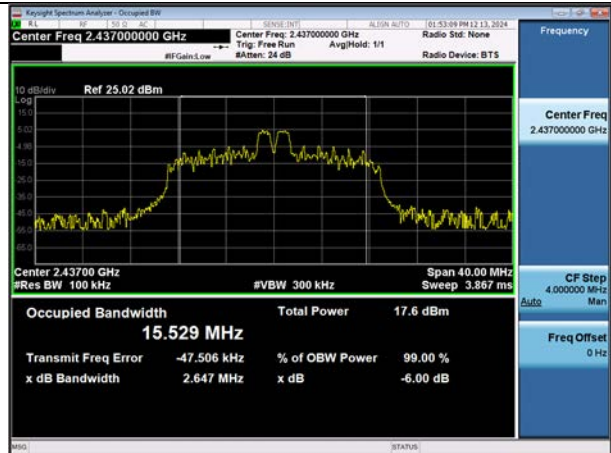


BW20M Ch.11(2462 MHz) RU 4

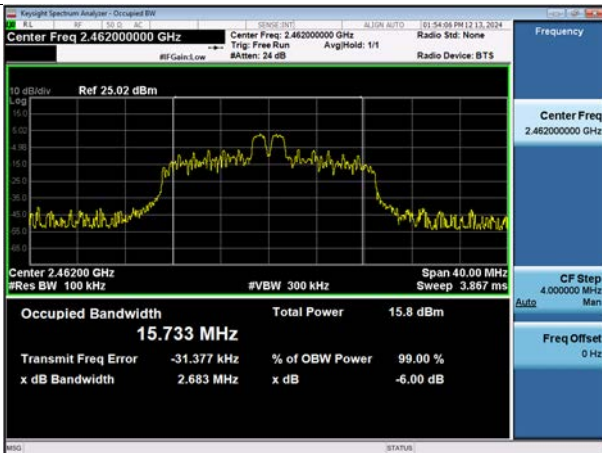

BW20M Ch.12(2467 MHz) RU 4

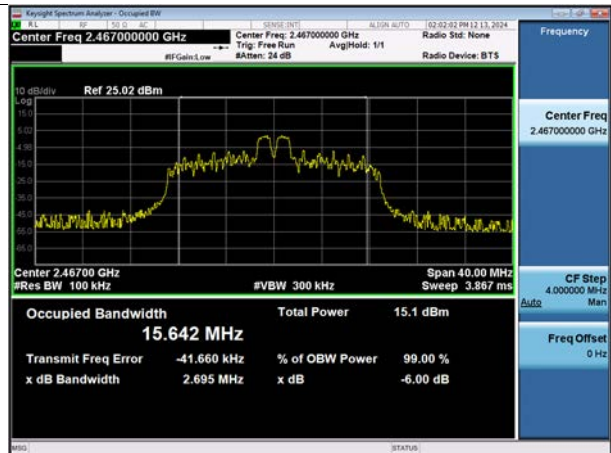

BW20M Ch.13(2472 MHz) RU 4

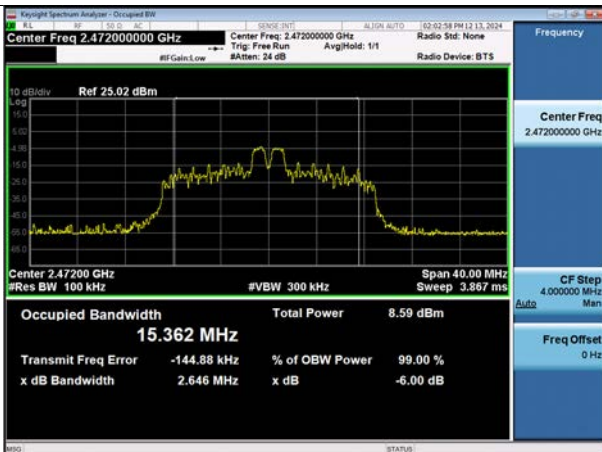

### 9.3 OUTPUT POWER

#### Note:

1. MIMO Peak Power =  $10 \cdot \log((10^{(\text{Ant.1 Peak power} / 10)}) + (10^{(\text{Ant.2 Peak power} / 10)}))$

#### Peak Power

##### [SISO Ant.1]

| Mode         | Freq.<br>[MHz] | CH. | Total Peak Power [dBm] |                |                 |
|--------------|----------------|-----|------------------------|----------------|-----------------|
|              |                |     | RU Index : Low         | RU Index : Mid | RU Index : High |
|              |                |     | ANT1                   | ANT1           | ANT1            |
| HE20<br>26T  | 2412           | 1   | 16.95                  | 20.41          | 17.17           |
|              | 2437           | 6   | 16.89                  | 20.18          | 17.89           |
|              | 2462           | 11  | 17.78                  | 20.47          | 17.88           |
|              | 2467           | 12  | 17.27                  | 20.14          | 17.51           |
|              | 2472           | 13  | 7.64                   | 10.89          | 7.38            |
| HE20<br>52T  | 2412           | 1   | 17.74                  | 19.81          | 18.03           |
|              | 2437           | 6   | 17.57                  | 19.35          | 18.55           |
|              | 2462           | 11  | 18.50                  | 20.02          | 18.56           |
|              | 2467           | 12  | 17.81                  | 19.49          | 18.09           |
|              | 2472           | 13  | 10.66                  | 12.42          | 10.61           |
| HE20<br>106T | 2412           | 1   | 18.66                  | -              | 18.77           |
|              | 2437           | 6   | 18.39                  | -              | 19.25           |
|              | 2462           | 11  | 19.19                  | -              | 19.24           |
|              | 2467           | 12  | 18.43                  | -              | 18.79           |
|              | 2472           | 13  | 13.87                  | -              | 14.08           |
| HE20<br>242T | 2412           | 1   | -                      | 18.16          | -               |
|              | 2437           | 6   | -                      | 18.18          | -               |
|              | 2462           | 11  | -                      | 18.66          | -               |
|              | 2467           | 12  | -                      | 17.96          | -               |
|              | 2472           | 13  | -                      | 14.53          | -               |
| HE20<br>SU   | 2412           | 1   | -                      | 25.94          | -               |
|              | 2437           | 6   | -                      | 25.90          | -               |
|              | 2462           | 11  | -                      | 25.81          | -               |
|              | 2467           | 12  | -                      | 18.05          | -               |
|              | 2472           | 13  | -                      | 15.54          | -               |

## [SISO Ant.2]

| Mode         | Freq.<br>[MHz] | CH. | Total Peak Power [dBm] |                |                 |
|--------------|----------------|-----|------------------------|----------------|-----------------|
|              |                |     | RU Index : Low         | RU Index : Mid | RU Index : High |
|              |                |     | ANT2                   | ANT2           | ANT2            |
| HE20<br>26T  | 2412           | 1   | 14.17                  | 17.68          | 14.95           |
|              | 2437           | 6   | 15.01                  | 18.43          | 15.23           |
|              | 2462           | 11  | 14.02                  | 16.98          | 13.90           |
|              | 2467           | 12  | 13.47                  | 16.52          | 13.29           |
|              | 2472           | 13  | 8.67                   | 11.80          | 8.07            |
| HE20<br>52T  | 2412           | 1   | 14.97                  | 16.92          | 15.70           |
|              | 2437           | 6   | 15.73                  | 17.63          | 15.96           |
|              | 2462           | 11  | 14.66                  | 16.15          | 14.52           |
|              | 2467           | 12  | 14.28                  | 15.90          | 14.28           |
|              | 2472           | 13  | 12.08                  | 13.82          | 11.73           |
| HE20<br>106T | 2412           | 1   | 16.59                  | -              | 17.11           |
|              | 2437           | 6   | 17.54                  | -              | 17.64           |
|              | 2462           | 11  | 16.42                  | -              | 16.34           |
|              | 2467           | 12  | 15.92                  | -              | 15.88           |
|              | 2472           | 13  | 14.08                  | -              | 13.97           |
| HE20<br>242T | 2412           | 1   | -                      | 16.47          | -               |
|              | 2437           | 6   | -                      | 17.08          | -               |
|              | 2462           | 11  | -                      | 15.80          | -               |
|              | 2467           | 12  | -                      | 15.21          | -               |
|              | 2472           | 13  | -                      | 13.70          | -               |
| HE20<br>SU   | 2412           | 1   | -                      | 23.35          | -               |
|              | 2437           | 6   | -                      | 24.12          | -               |
|              | 2462           | 11  | -                      | 19.65          | -               |
|              | 2467           | 12  | -                      | 16.10          | -               |
|              | 2472           | 13  | -                      | 12.81          | -               |

**[MIMO\_SDM(Ant.1+Ant.2)]**

| Mode         | Freq.<br>[MHz] | CH. | Total Peak Power [dBm] |       |       |                |       |       |                 |       |       | Limit<br>[dBm] |
|--------------|----------------|-----|------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|----------------|
|              |                |     | RU Index : Low         |       |       | RU Index : Mid |       |       | RU Index : High |       |       |                |
|              |                |     | ANT1                   | ANT2  | MIMO  | ANT1           | ANT2  | MIMO  | ANT1            | ANT2  | MIMO  |                |
| HE20<br>26T  | 2412           | 1   | 15.11                  | 14.40 | 17.77 | 18.62          | 17.37 | 21.04 | 15.38           | 15.03 | 18.19 | 30             |
|              | 2437           | 6   | 14.85                  | 15.42 | 18.13 | 17.86          | 18.46 | 21.06 | 15.71           | 15.52 | 18.62 | 30             |
|              | 2462           | 11  | 16.09                  | 14.10 | 18.22 | 18.66          | 16.86 | 20.77 | 16.04           | 13.88 | 18.09 | 30             |
|              | 2467           | 12  | 15.45                  | 13.45 | 17.43 | 18.29          | 16.51 | 20.49 | 15.64           | 13.35 | 17.60 | 30             |
|              | 2472           | 13  | 7.91                   | 6.55  | 10.21 | 11.23          | 9.80  | 13.58 | 7.81            | 5.99  | 9.94  | 30             |
| HE20<br>52T  | 2412           | 1   | 15.89                  | 14.99 | 18.47 | 17.81          | 16.72 | 20.28 | 16.10           | 15.51 | 18.79 | 30             |
|              | 2437           | 6   | 15.47                  | 15.97 | 18.73 | 16.99          | 17.81 | 20.43 | 16.37           | 16.12 | 19.26 | 30             |
|              | 2462           | 11  | 16.64                  | 14.67 | 18.78 | 18.07          | 16.05 | 20.19 | 16.63           | 14.46 | 18.69 | 30             |
|              | 2467           | 12  | 16.12                  | 14.33 | 18.33 | 17.55          | 15.93 | 19.83 | 16.34           | 14.19 | 18.41 | 30             |
|              | 2472           | 13  | 11.04                  | 9.84  | 13.48 | 12.89          | 11.64 | 15.31 | 11.08           | 9.48  | 13.35 | 30             |
| HE20<br>106T | 2412           | 1   | 17.08                  | 16.13 | 19.64 | -              | -     | -     | 17.28           | 16.66 | 19.95 | 30             |
|              | 2437           | 6   | 16.42                  | 17.23 | 19.86 | -              | -     | -     | 17.34           | 17.39 | 20.37 | 30             |
|              | 2462           | 11  | 17.61                  | 15.70 | 19.77 | -              | -     | -     | 17.74           | 15.75 | 19.81 | 30             |
|              | 2467           | 12  | 17.14                  | 15.51 | 19.41 | -              | -     | -     | 17.44           | 15.58 | 19.62 | 30             |
|              | 2472           | 13  | 13.69                  | 12.31 | 16.07 | -              | -     | -     | 13.92           | 12.18 | 16.14 | 30             |
| HE20<br>242T | 2412           | 1   | -                      | -     | -     | 16.57          | 15.97 | 19.29 | -               | -     | -     | 30             |
|              | 2437           | 6   | -                      | -     | -     | 16.27          | 16.78 | 19.55 | -               | -     | -     | 30             |
|              | 2462           | 11  | -                      | -     | -     | 16.98          | 15.18 | 19.18 | -               | -     | -     | 30             |
|              | 2467           | 12  | -                      | -     | -     | 16.66          | 14.94 | 18.89 | -               | -     | -     | 30             |
|              | 2472           | 13  | -                      | -     | -     | 14.30          | 12.71 | 16.59 | -               | -     | -     | 30             |
| HE20<br>SU   | 2412           | 1   | -                      | -     | -     | 23.76          | 23.19 | 26.49 | -               | -     | -     | 30             |
|              | 2437           | 6   | -                      | -     | -     | 23.96          | 23.87 | 26.93 | -               | -     | -     | 30             |
|              | 2462           | 11  | -                      | -     | -     | 21.40          | 19.45 | 23.54 | -               | -     | -     | 30             |
|              | 2467           | 12  | -                      | -     | -     | 17.92          | 12.60 | 18.99 | -               | -     | -     | 30             |
|              | 2472           | 13  | -                      | -     | -     | 14.15          | 12.57 | 16.41 | -               | -     | -     | 30             |

### Average Power

#### Note:

1. Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

#### [SISO Ant.1]

| Mode         | Freq.<br>[MHz] | CH. | Total Average Power [dBm] |                |                 |
|--------------|----------------|-----|---------------------------|----------------|-----------------|
|              |                |     | RU Index : Low            | RU Index : Mid | RU Index : High |
|              |                |     | ANT1                      | ANT1           | ANT1            |
| HE20<br>26T  | 2412           | 1   | 3.70                      | 9.87           | 4.62            |
|              | 2437           | 6   | 4.14                      | 9.80           | 6.32            |
|              | 2462           | 11  | 5.33                      | 9.84           | 5.55            |
|              | 2467           | 12  | 4.69                      | 9.36           | 5.01            |
|              | 2472           | 13  | -4.78                     | 0.64           | -5.03           |
| HE20<br>52T  | 2412           | 1   | 5.74                      | 9.44           | 6.49            |
|              | 2437           | 6   | 5.90                      | 9.22           | 7.88            |
|              | 2462           | 11  | 7.14                      | 9.75           | 7.27            |
|              | 2467           | 12  | 6.20                      | 8.84           | 6.85            |
|              | 2472           | 13  | -0.90                     | 2.45           | -1.22           |
| HE20<br>106T | 2412           | 1   | 8.17                      | -              | 8.40            |
|              | 2437           | 6   | 7.67                      | -              | 9.30            |
|              | 2462           | 11  | 8.69                      | -              | 8.77            |
|              | 2467           | 12  | 7.89                      | -              | 8.46            |
|              | 2472           | 13  | 3.49                      | -              | 3.69            |
| HE20<br>242T | 2412           | 1   | -                         | 8.71           | -               |
|              | 2437           | 6   | -                         | 8.98           | -               |
|              | 2462           | 11  | -                         | 9.11           | -               |
|              | 2467           | 12  | -                         | 8.53           | -               |
|              | 2472           | 13  | -                         | 4.91           | -               |
| HE20<br>SU   | 2412           | 1   | -                         | 16.85          | -               |
|              | 2437           | 6   | -                         | 16.71          | -               |
|              | 2462           | 11  | -                         | 16.65          | -               |
|              | 2467           | 12  | -                         | 6.56           | -               |
|              | 2472           | 13  | -                         | 5.61           | -               |

## [SISO Ant.2]

| Mode         | Freq.<br>[MHz] | CH. | Total Average Power [dBm] |                |                 |
|--------------|----------------|-----|---------------------------|----------------|-----------------|
|              |                |     | RU Index : Low            | RU Index : Mid | RU Index : High |
|              |                |     | ANT2                      | ANT2           | ANT2            |
| HE20<br>26T  | 2412           | 1   | 2.15                      | 7.53           | 3.60            |
|              | 2437           | 6   | 2.56                      | 7.90           | 2.59            |
|              | 2462           | 11  | 2.35                      | 7.04           | 2.32            |
|              | 2467           | 12  | 1.86                      | 6.74           | 1.73            |
|              | 2472           | 13  | -3.08                     | 1.88           | -4.12           |
| HE20<br>52T  | 2412           | 1   | 3.56                      | 6.72           | 4.75            |
|              | 2437           | 6   | 4.73                      | 7.77           | 5.09            |
|              | 2462           | 11  | 3.62                      | 6.38           | 3.50            |
|              | 2467           | 12  | 3.05                      | 6.02           | 3.02            |
|              | 2472           | 13  | 0.47                      | 3.44           | 0.01            |
| HE20<br>106T | 2412           | 1   | 6.08                      | -              | 6.90            |
|              | 2437           | 6   | 7.20                      | -              | 7.29            |
|              | 2462           | 11  | 6.28                      | -              | 6.41            |
|              | 2467           | 12  | 5.78                      | -              | 5.76            |
|              | 2472           | 13  | 3.67                      | -              | 3.45            |
| HE20<br>242T | 2412           | 1   | -                         | 6.83           | -               |
|              | 2437           | 6   | -                         | 7.60           | -               |
|              | 2462           | 11  | -                         | 6.67           | -               |
|              | 2467           | 12  | -                         | 6.16           | -               |
|              | 2472           | 13  | -                         | 4.40           | -               |
| HE20<br>SU   | 2412           | 1   | -                         | 13.88          | -               |
|              | 2437           | 6   | -                         | 14.77          | -               |
|              | 2462           | 11  | -                         | 10.21          | -               |
|              | 2467           | 12  | -                         | 4.73           | -               |
|              | 2472           | 13  | -                         | 3.57           | -               |

## [MIMO\_SDM(Ant.1+Ant.2)]

| Mode         | Freq.<br>[MHz] | CH. | Total Average Power [dBm] |       |       |                |       |       |                 |       |       | Limit<br>[dBm] |
|--------------|----------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|----------------|
|              |                |     | RU Index : Low            |       |       | RU Index : Mid |       |       | RU Index : High |       |       |                |
|              |                |     | ANT1                      | ANT2  | MIMO  | ANT1           | ANT2  | MIMO  | ANT1            | ANT2  | MIMO  |                |
| HE20<br>26T  | 2412           | 1   | 2.42                      | 1.77  | 5.12  | 8.27           | 7.40  | 10.86 | 2.75            | 2.80  | 5.78  | 30             |
|              | 2437           | 6   | 2.50                      | 2.94  | 5.73  | 7.80           | 7.96  | 10.89 | 3.85            | 2.99  | 6.45  | 30             |
|              | 2462           | 11  | 3.78                      | 2.14  | 6.04  | 8.29           | 6.63  | 10.55 | 3.50            | 1.43  | 5.60  | 30             |
|              | 2467           | 12  | 2.86                      | 0.92  | 5.01  | 7.90           | 5.97  | 10.05 | 3.09            | 0.40  | 4.96  | 30             |
|              | 2472           | 13  | -4.43                     | -5.43 | -1.89 | 0.89           | -0.55 | 3.24  | -4.66           | -6.56 | -2.50 | 30             |
| HE20<br>52T  | 2412           | 1   | 3.89                      | 3.18  | 6.55  | 7.47           | 6.41  | 9.98  | 4.05            | 4.02  | 7.04  | 30             |
|              | 2437           | 6   | 3.74                      | 4.17  | 6.97  | 6.97           | 7.35  | 10.17 | 4.82            | 4.23  | 7.54  | 30             |
|              | 2462           | 11  | 4.95                      | 3.19  | 7.16  | 7.73           | 5.95  | 9.94  | 4.64            | 2.56  | 6.73  | 30             |
|              | 2467           | 12  | 4.05                      | 2.23  | 6.24  | 7.21           | 5.47  | 9.43  | 4.25            | 1.91  | 6.24  | 30             |
|              | 2472           | 13  | -0.62                     | -1.68 | 1.89  | 2.80           | 1.23  | 5.09  | -0.76           | -2.45 | 1.48  | 30             |
| HE20<br>106T | 2412           | 1   | 6.68                      | 5.83  | 9.28  | -              | -     | -     | 6.67            | 6.55  | 9.62  | 30             |
|              | 2437           | 6   | 6.47                      | 6.67  | 9.58  | -              | -     | -     | 7.69            | 6.92  | 10.33 | 30             |
|              | 2462           | 11  | 7.20                      | 5.20  | 9.32  | -              | -     | -     | 7.33            | 5.15  | 9.38  | 30             |
|              | 2467           | 12  | 6.59                      | 4.91  | 8.84  | -              | -     | -     | 6.99            | 4.83  | 9.05  | 30             |
|              | 2472           | 13  | 2.99                      | 2.13  | 5.59  | -              | -     | -     | 3.25            | 1.79  | 5.59  | 30             |
| HE20<br>242T | 2412           | 1   | -                         | -     | -     | 7.24           | 6.46  | 9.88  | -               | -     | -     | 30             |
|              | 2437           | 6   | -                         | -     | -     | 7.40           | 7.13  | 10.28 | -               | -     | -     | 30             |
|              | 2462           | 11  | -                         | -     | -     | 7.56           | 5.53  | 9.67  | -               | -     | -     | 30             |
|              | 2467           | 12  | -                         | -     | -     | 6.95           | 5.05  | 9.11  | -               | -     | -     | 30             |
|              | 2472           | 13  | -                         | -     | -     | 4.91           | 3.38  | 7.22  | -               | -     | -     | 30             |
| HE20<br>SU   | 2412           | 1   | -                         | -     | -     | 14.91          | 14.12 | 17.54 | -               | -     | -     | 30             |
|              | 2437           | 6   | -                         | -     | -     | 15.10          | 15.06 | 18.09 | -               | -     | -     | 30             |
|              | 2462           | 11  | -                         | -     | -     | 12.35          | 7.44  | 13.57 | -               | -     | -     | 30             |
|              | 2467           | 12  | -                         | -     | -     | 5.98           | 3.93  | 8.09  | -               | -     | -     | 30             |
|              | 2472           | 13  | -                         | -     | -     | 4.52           | 2.90  | 6.80  | -               | -     | -     | 30             |

## 9.4 POWER SPECTRAL DENSITY

# Limit : 8 [dBm/3 kHz]

### Note :

1. MIMO Total PSD =  $10 \cdot \log(((10^{\text{Ant.1 PSD}/10}) + (10^{\text{Ant.2 PSD}/10})))$

2. Total PSD = Measured Value + Duty Cycle Factor

### [SISO Ant.1]

| Mode         | Freq.<br>[MHz] | CH. | Total Power Spectral Density [dBm/MHz] |                |                 |
|--------------|----------------|-----|----------------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low                         | RU Index : Mid | RU Index : High |
|              |                |     | ANT1                                   | ANT1           | ANT1            |
| HE20<br>26T  | 2412           | 1   | -11.443                                | -6.782         | -11.174         |
|              | 2437           | 6   | -11.246                                | -6.778         | -9.627          |
|              | 2462           | 11  | -9.722                                 | -6.023         | -10.085         |
|              | 2467           | 12  | -11.623                                | -6.855         | -10.172         |
|              | 2472           | 13  | -20.437                                | -16.298        | -20.982         |
| HE20<br>52T  | 2412           | 1   | -12.912                                | -9.869         | -12.252         |
|              | 2437           | 6   | -13.760                                | -10.317        | -11.263         |
|              | 2462           | 11  | -11.789                                | -9.909         | -11.802         |
|              | 2467           | 12  | -13.088                                | -10.217        | -12.517         |
|              | 2472           | 13  | -20.009                                | -17.195        | -19.344         |
| HE20<br>106T | 2412           | 1   | -13.388                                | -              | -13.447         |
|              | 2437           | 6   | -13.447                                | -              | -12.509         |
|              | 2462           | 11  | -12.896                                | -              | -13.148         |
|              | 2467           | 12  | -13.589                                | -              | -13.051         |
|              | 2472           | 13  | -18.047                                | -              | -17.733         |
| HE20<br>242T | 2412           | 1   | -                                      | -15.616        | -               |
|              | 2437           | 6   | -                                      | -15.529        | -               |
|              | 2462           | 11  | -                                      | -15.313        | -               |
|              | 2467           | 12  | -                                      | -15.818        | -               |
|              | 2472           | 13  | -                                      | -19.161        | -               |
| HE20<br>SU   | 2412           | 1   | -                                      | -7.877         | -               |
|              | 2437           | 6   | -                                      | -7.973         | -               |
|              | 2462           | 11  | -                                      | -8.240         | -               |
|              | 2467           | 12  | -                                      | -18.567        | -               |
|              | 2472           | 13  | -                                      | -19.189        | -               |

## [SISO Ant.2]

| Mode         | Freq.<br>[MHz] | CH. | Total Power Spectral Density [dBm/MHz] |                |                 |
|--------------|----------------|-----|----------------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low                         | RU Index : Mid | RU Index : High |
|              |                |     | ANT2                                   | ANT2           | ANT2            |
| HE20<br>26T  | 2412           | 1   | -14.341                                | -9.789         | -12.904         |
|              | 2437           | 6   | -13.416                                | -8.986         | -12.945         |
|              | 2462           | 11  | -14.615                                | -10.706        | -14.654         |
|              | 2467           | 12  | -14.987                                | -10.879        | -14.945         |
|              | 2472           | 13  | -19.696                                | -15.528        | -20.462         |
| HE20<br>52T  | 2412           | 1   | -15.232                                | -13.049        | -14.400         |
|              | 2437           | 6   | -14.343                                | -12.152        | -13.886         |
|              | 2462           | 11  | -15.619                                | -13.816        | -15.789         |
|              | 2467           | 12  | -16.063                                | -14.149        | -15.949         |
|              | 2472           | 13  | -18.113                                | -16.106        | -18.627         |
| HE20<br>106T | 2412           | 1   | -15.145                                | -              | -14.743         |
|              | 2437           | 6   | -14.154                                | -              | -14.241         |
|              | 2462           | 11  | -15.688                                | -              | -15.731         |
|              | 2467           | 12  | -16.128                                | -              | -16.200         |
|              | 2472           | 13  | -17.705                                | -              | -17.746         |
| HE20<br>242T | 2412           | 1   | -                                      | -17.953        | -               |
|              | 2437           | 6   | -                                      | -16.757        | -               |
|              | 2462           | 11  | -                                      | -18.675        | -               |
|              | 2467           | 12  | -                                      | -18.756        | -               |
|              | 2472           | 13  | -                                      | -20.371        | -               |
| HE20<br>SU   | 2412           | 1   | -                                      | -13.294        | -               |
|              | 2437           | 6   | -                                      | -12.746        | -               |
|              | 2462           | 11  | -                                      | -14.239        | -               |
|              | 2467           | 12  | -                                      | -19.980        | -               |
|              | 2472           | 13  | -                                      | -18.018        | -               |

[MIMO\_SDM(Ant.1+Ant.2)]

| Mode         | Freq.<br>[MHz] | CH. | Total Power Spectral Density [dBm/MHz] |         |         |                |         |         |                 |         |         | Limit<br>[dBm/3<br>kHz] |
|--------------|----------------|-----|----------------------------------------|---------|---------|----------------|---------|---------|-----------------|---------|---------|-------------------------|
|              |                |     | RU Index : Low                         |         |         | RU Index : Mid |         |         | RU Index : High |         |         |                         |
|              |                |     | ANT1                                   | ANT2    | MIMO    | ANT1           | ANT2    | MIMO    | ANT1            | ANT2    | MIMO    |                         |
| HE20<br>26T  | 2412           | 1   | -15.459                                | -15.556 | -12.497 | -8.967         | -9.784  | -6.346  | -13.372         | -13.250 | -10.301 | 8                       |
|              | 2437           | 6   | -14.035                                | -13.504 | -10.752 | -9.107         | -8.969  | -6.028  | -11.931         | -12.954 | -9.403  | 8                       |
|              | 2462           | 11  | -12.597                                | -14.743 | -10.529 | -8.860         | -10.856 | -6.734  | -12.528         | -14.888 | -10.540 | 8                       |
|              | 2467           | 12  | -13.637                                | -15.529 | -11.471 | -9.390         | -11.383 | -7.263  | -12.941         | -15.645 | -11.076 | 8                       |
|              | 2472           | 13  | -20.742                                | -22.018 | -18.323 | -16.042        | -17.826 | -13.833 | -21.019         | -22.969 | -18.876 | 8                       |
| HE20<br>52T  | 2412           | 1   | -14.432                                | -15.350 | -11.856 | -12.196        | -13.307 | -9.706  | -14.399         | -14.604 | -11.490 | 8                       |
|              | 2437           | 6   | -14.937                                | -14.486 | -11.695 | -12.640        | -12.245 | -9.428  | -13.548         | -14.017 | -10.766 | 8                       |
|              | 2462           | 11  | -13.792                                | -15.846 | -11.688 | -11.912        | -13.998 | -9.821  | -13.716         | -16.001 | -11.700 | 8                       |
|              | 2467           | 12  | -14.542                                | -16.533 | -12.414 | -12.812        | -14.516 | -10.571 | -14.078         | -16.592 | -12.145 | 8                       |
|              | 2472           | 13  | -19.077                                | -20.808 | -16.847 | -16.945        | -18.743 | -14.741 | -19.187         | -21.123 | -17.038 | 8                       |
| HE20<br>106T | 2412           | 1   | -14.704                                | -15.724 | -12.174 | -              | -       | -       | -14.762         | -15.459 | -12.086 | 8                       |
|              | 2437           | 6   | -15.204                                | -14.774 | -11.973 | -              | -       | -       | -14.483         | -14.586 | -11.524 | 8                       |
|              | 2462           | 11  | -14.362                                | -16.683 | -12.359 | -              | -       | -       | -14.387         | -16.561 | -12.329 | 8                       |
|              | 2467           | 12  | -15.090                                | -16.825 | -12.861 | -              | -       | -       | -15.014         | -16.829 | -12.817 | 8                       |
|              | 2472           | 13  | -18.046                                | -19.701 | -15.785 | -              | -       | -       | -17.756         | -19.671 | -15.598 | 8                       |
| HE20<br>242T | 2412           | 1   | -                                      | -       | -       | -17.433        | -17.983 | -14.689 | -               | -       | -       | 8                       |
|              | 2437           | 6   | -                                      | -       | -       | -17.424        | -17.180 | -14.290 | -               | -       | -       | 8                       |
|              | 2462           | 11  | -                                      | -       | -       | -17.300        | -18.618 | -14.899 | -               | -       | -       | 8                       |
|              | 2467           | 12  | -                                      | -       | -       | -17.707        | -19.548 | -15.521 | -               | -       | -       | 8                       |
|              | 2472           | 13  | -                                      | -       | -       | -19.662        | -20.741 | -17.158 | -               | -       | -       | 8                       |
| HE20<br>SU   | 2412           | 1   | -                                      | -       | -       | -9.144         | -10.252 | -6.652  | -               | -       | -       | 8                       |
|              | 2437           | 6   | -                                      | -       | -       | -9.077         | -9.279  | -6.166  | -               | -       | -       | 8                       |
|              | 2462           | 11  | -                                      | -       | -       | -12.182        | -14.151 | -10.045 | -               | -       | -       | 8                       |
|              | 2467           | 12  | -                                      | -       | -       | -19.468        | -21.459 | -17.340 | -               | -       | -       | 8                       |
|              | 2472           | 13  | -                                      | -       | -       | -19.243        | -21.493 | -17.213 | -               | -       | -       | 8                       |

## Test Plots



**Note:** In order to simplify the report, attached plots were only the worst case PSD channel.

[MIMO\_SDM(Ant.1+Ant.2)]



ANT.1

ANT.2



BW20M Ch.1(2412 MHz) RU 4

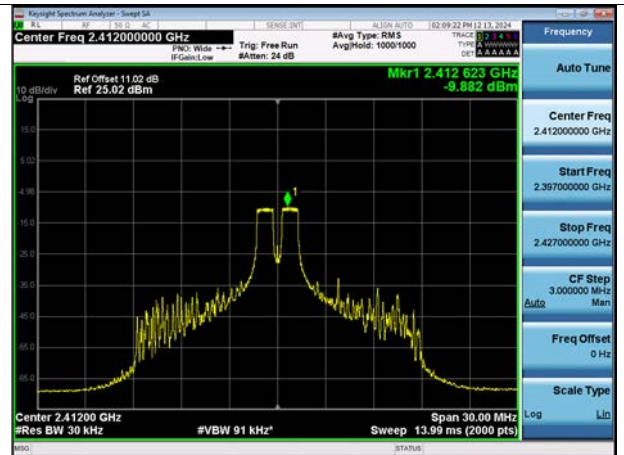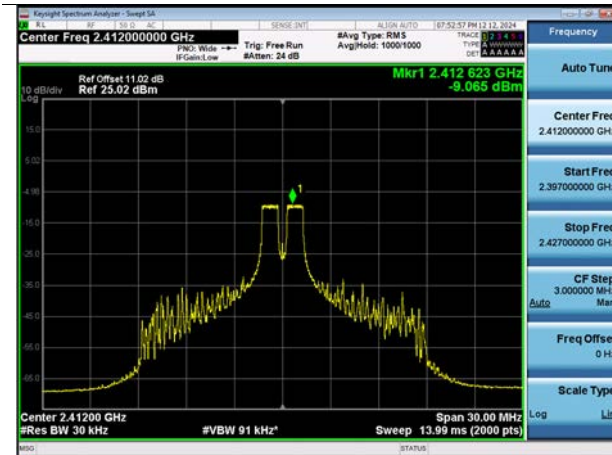

BW20M Ch.6(2437 MHz) RU 4

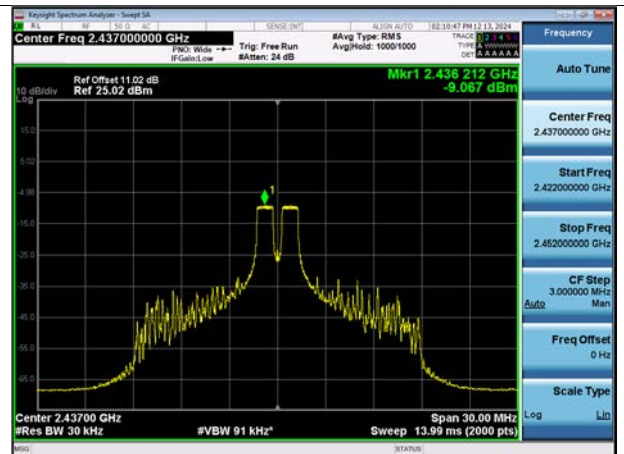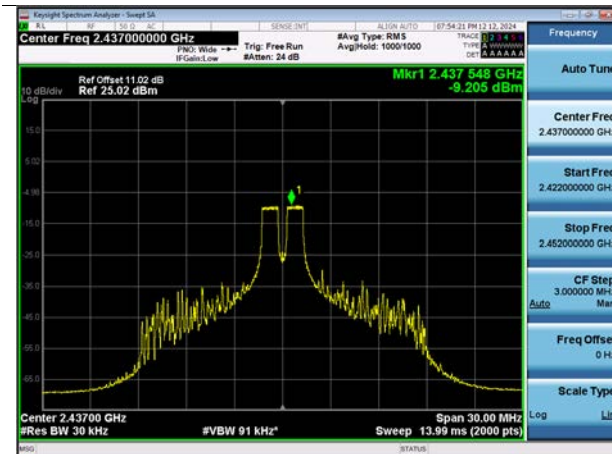



BW20M Ch.11(2462 MHz) RU 4

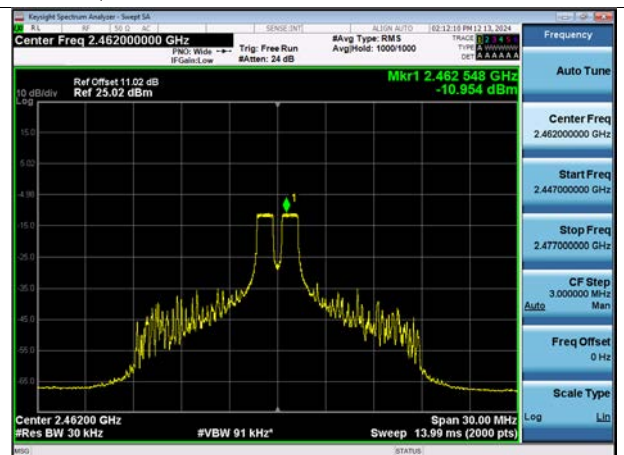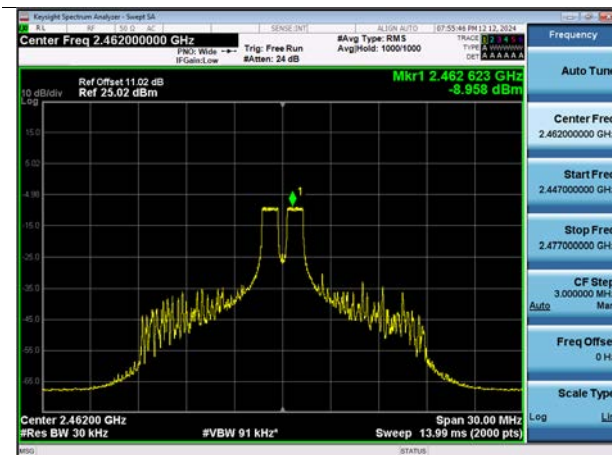



ANT.1

ANT.2

BW20M Ch.12(2467 MHz) 26T RU 4

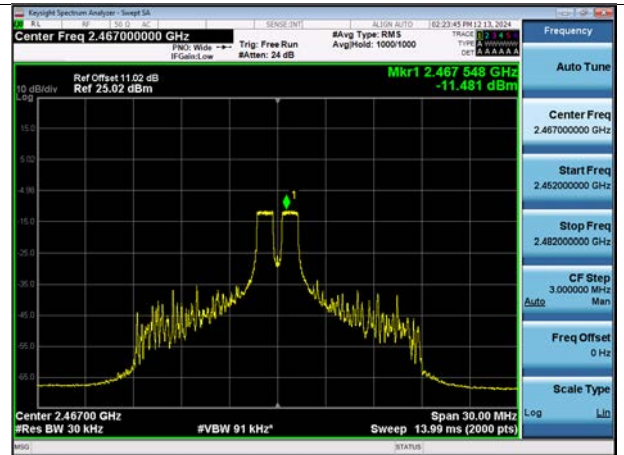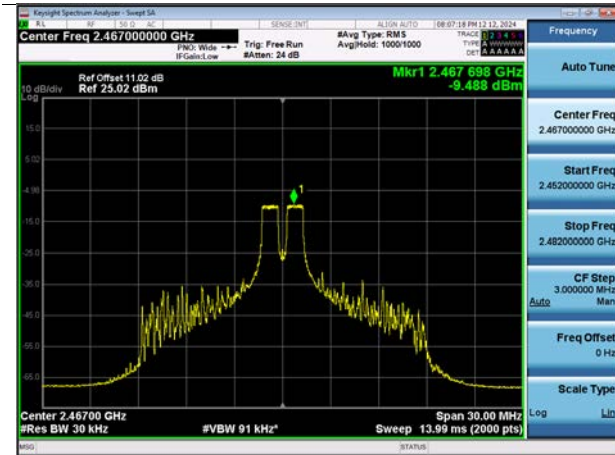

BW20M Ch.13(2472 MHz) 26T RU 4

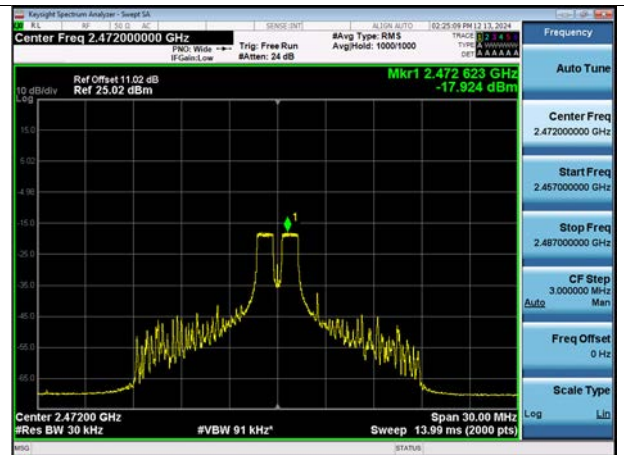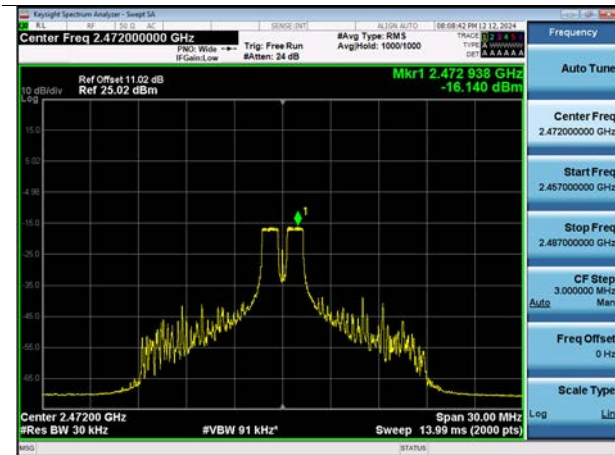

## 9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

### Band Edge

# Limit : 30 dBc

#### [SISO Ant.1]

| Mode         | Freq.<br>[MHz] | CH. | RU Index | Measured Position | Band edge [dB] |
|--------------|----------------|-----|----------|-------------------|----------------|
| HE20<br>26T  | 2412           | 1   | Low      | Lowest Bandedge   | 38.096         |
|              | 2462           | 11  | High     | Highest Bandedge  | 53.967         |
|              | 2467           | 12  | High     | Highest Bandedge  | 45.225         |
|              | 2472           | 13  | High     | Highest Bandedge  | 34.570         |
| HE20<br>52T  | 2412           | 1   | Low      | Lowest Bandedge   | 38.281         |
|              | 2462           | 11  | High     | Highest Bandedge  | 52.981         |
|              | 2467           | 12  | High     | Highest Bandedge  | 52.074         |
|              | 2472           | 13  | High     | Highest Bandedge  | 37.956         |
| HE20<br>106T | 2412           | 1   | Low      | Lowest Bandedge   | 39.224         |
|              | 2462           | 11  | High     | Highest Bandedge  | 53.947         |
|              | 2467           | 12  | High     | Highest Bandedge  | 49.748         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.786         |
| HE20<br>242T | 2412           | 1   | Low      | Lowest Bandedge   | 41.246         |
|              | 2462           | 11  | High     | Highest Bandedge  | 50.175         |
|              | 2467           | 12  | High     | Highest Bandedge  | 48.293         |
|              | 2472           | 13  | High     | Highest Bandedge  | 38.219         |
| HE20<br>SU   | 2412           | 1   | Low      | Lowest Bandedge   | 33.976         |
|              | 2462           | 11  | High     | Highest Bandedge  | 46.495         |
|              | 2467           | 12  | High     | Highest Bandedge  | 45.622         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.401         |

**[SISO Ant.2]**

| Mode         | Freq.<br>[MHz] | CH. | RU Index | Measured Position | Band edge [dB] |
|--------------|----------------|-----|----------|-------------------|----------------|
| HE20<br>26T  | 2412           | 1   | Low      | Lowest Bandedge   | 36.906         |
|              | 2462           | 11  | High     | Highest Bandedge  | 51.048         |
|              | 2467           | 12  | High     | Highest Bandedge  | 44.954         |
|              | 2472           | 13  | High     | Highest Bandedge  | 34.112         |
| HE20<br>52T  | 2412           | 1   | Low      | Lowest Bandedge   | 37.909         |
|              | 2462           | 11  | High     | Highest Bandedge  | 49.940         |
|              | 2467           | 12  | High     | Highest Bandedge  | 49.133         |
|              | 2472           | 13  | High     | Highest Bandedge  | 35.541         |
| HE20<br>106T | 2412           | 1   | Low      | Lowest Bandedge   | 38.244         |
|              | 2462           | 11  | High     | Highest Bandedge  | 49.468         |
|              | 2467           | 12  | High     | Highest Bandedge  | 49.799         |
|              | 2472           | 13  | High     | Highest Bandedge  | 37.530         |
| HE20<br>242T | 2412           | 1   | Low      | Lowest Bandedge   | 38.457         |
|              | 2462           | 11  | High     | Highest Bandedge  | 47.558         |
|              | 2467           | 12  | High     | Highest Bandedge  | 47.791         |
|              | 2472           | 13  | High     | Highest Bandedge  | 35.263         |
| HE20<br>SU   | 2412           | 1   | Low      | Lowest Bandedge   | 31.475         |
|              | 2462           | 11  | High     | Highest Bandedge  | 48.618         |
|              | 2467           | 12  | High     | Highest Bandedge  | 47.079         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.546         |

**[MIMO\_SDM(Ant. 1)]**

| Mode         | Freq.<br>[MHz] | CH. | RU Index | Measured Position | Band edge [dB] |
|--------------|----------------|-----|----------|-------------------|----------------|
| HE20<br>26T  | 2412           | 1   | Low      | Lowest Bandedge   | 37.103         |
|              | 2462           | 11  | High     | Highest Bandedge  | 52.008         |
|              | 2467           | 12  | High     | Highest Bandedge  | 49.938         |
|              | 2472           | 13  | High     | Highest Bandedge  | 32.681         |
| HE20<br>52T  | 2412           | 1   | Low      | Lowest Bandedge   | 40.106         |
|              | 2462           | 11  | High     | Highest Bandedge  | 51.416         |
|              | 2467           | 12  | High     | Highest Bandedge  | 51.635         |
|              | 2472           | 13  | High     | Highest Bandedge  | 34.192         |
| HE20<br>106T | 2412           | 1   | Low      | Lowest Bandedge   | 39.993         |
|              | 2462           | 11  | High     | Highest Bandedge  | 50.293         |
|              | 2467           | 12  | High     | Highest Bandedge  | 49.521         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.714         |
| HE20<br>242T | 2412           | 1   | Low      | Lowest Bandedge   | 39.864         |
|              | 2462           | 11  | High     | Highest Bandedge  | 48.403         |
|              | 2467           | 12  | High     | Highest Bandedge  | 47.606         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.327         |
| HE20<br>SU   | 2412           | 1   | Low      | Lowest Bandedge   | 37.081         |
|              | 2462           | 11  | High     | Highest Bandedge  | 50.739         |
|              | 2467           | 12  | High     | Highest Bandedge  | 46.041         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.345         |

**[MIMO\_SDM(Ant. 2)]**


| Mode         | Freq.<br>[MHz] | CH. | RU Index | Measured Position | Band edge [dB] |
|--------------|----------------|-----|----------|-------------------|----------------|
| HE20<br>26T  | 2412           | 1   | Low      | Lowest Bandedge   | 37.321         |
|              | 2462           | 11  | High     | Highest Bandedge  | 45.738         |
|              | 2467           | 12  | High     | Highest Bandedge  | 45.607         |
|              | 2472           | 13  | High     | Highest Bandedge  | 34.177         |
| HE20<br>52T  | 2412           | 1   | Low      | Lowest Bandedge   | 36.803         |
|              | 2462           | 11  | High     | Highest Bandedge  | 45.892         |
|              | 2467           | 12  | High     | Highest Bandedge  | 44.555         |
|              | 2472           | 13  | High     | Highest Bandedge  | 36.032         |
| HE20<br>106T | 2412           | 1   | Low      | Lowest Bandedge   | 39.524         |
|              | 2462           | 11  | High     | Highest Bandedge  | 43.130         |
|              | 2467           | 12  | High     | Highest Bandedge  | 42.010         |
|              | 2472           | 13  | High     | Highest Bandedge  | 38.655         |
| HE20<br>242T | 2412           | 1   | Low      | Lowest Bandedge   | 38.279         |
|              | 2462           | 11  | High     | Highest Bandedge  | 40.634         |
|              | 2467           | 12  | High     | Highest Bandedge  | 41.397         |
|              | 2472           | 13  | High     | Highest Bandedge  | 38.235         |
| HE20<br>SU   | 2412           | 1   | Low      | Lowest Bandedge   | 34.789         |
|              | 2462           | 11  | High     | Highest Bandedge  | 41.784         |
|              | 2467           | 12  | High     | Highest Bandedge  | 41.908         |
|              | 2472           | 13  | High     | Highest Bandedge  | 37.220         |

## Test Plots


**Note:** In order to simplify the report, attached plots were only the worst case.

[MIMO\_SDM(Ant. 1)]


BW 20M Ch.1(2412 MHz) SU

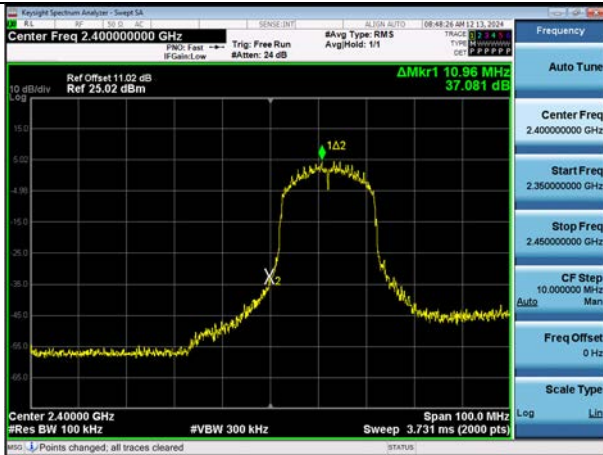


BW 20M Ch.11(2462 MHz) 242T RU 61

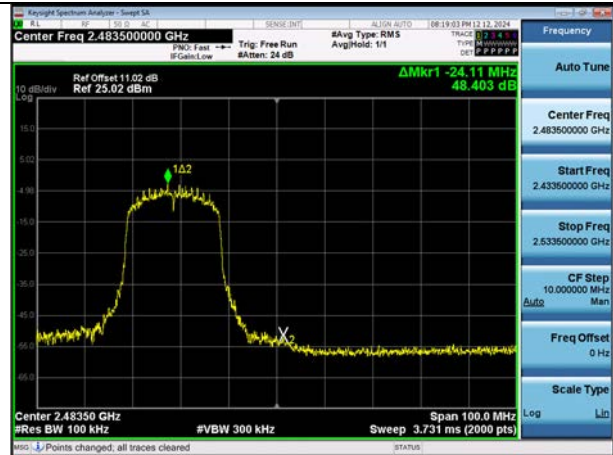

BW 20M Ch.12(2467 MHz) SU

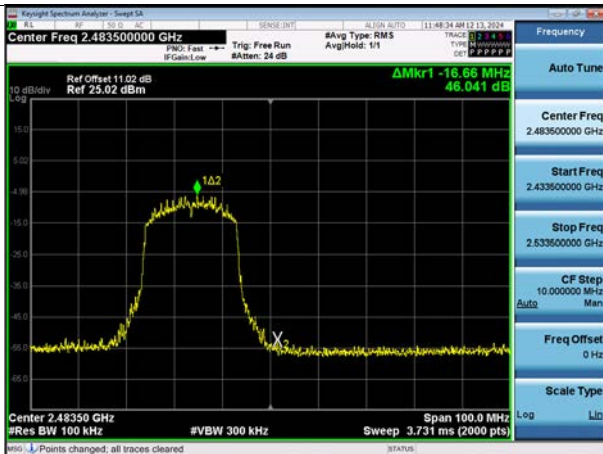


BW 20M Ch.13(2472 MHz) 26T RU 8

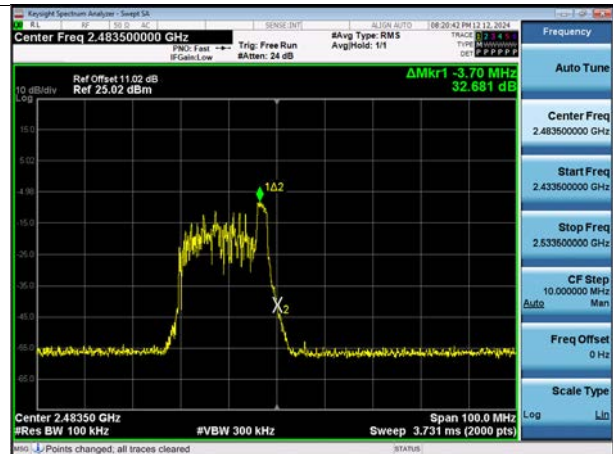


[MIMO\_SDM(Ant. 2)]


BW 20M Ch.1(2412 MHz) SU

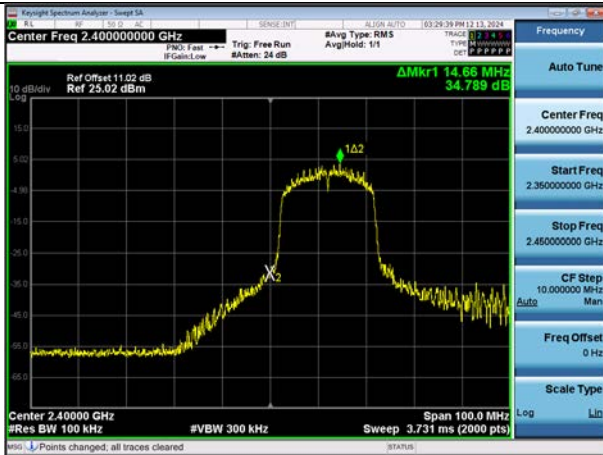

BW 20M Ch.11(2462 MHz) 242T RU 61

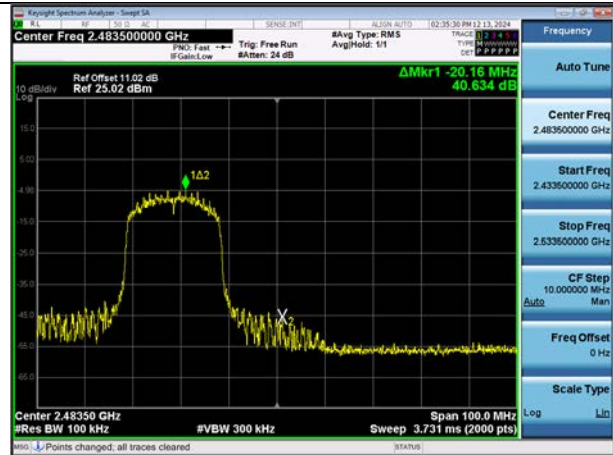

BW 20M Ch.12(2467 MHz) 242T RU 61

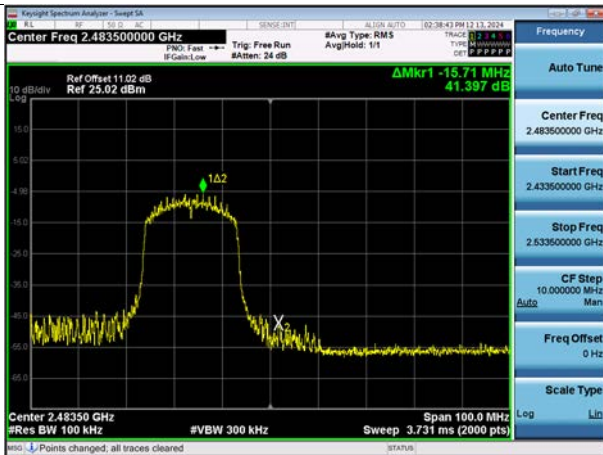

BW 20M Ch.13(2472 MHz) 26T RU 8



### Conducted Spurious Emissions

# Limit : 30 dBc

#### [SISO ANT.1]

| Mode         | Freq.<br>[MHz] | CH. | Conducted Spurious Emissions [dB] |                |                 |
|--------------|----------------|-----|-----------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low                    | RU Index : Mid | RU Index : High |
|              |                |     | ANT1                              | ANT1           | ANT1            |
| HE20<br>26T  | 2412           | 1   | 53.463                            | 57.807         | 53.599          |
|              | 2437           | 6   | 53.319                            | 59.250         | 54.855          |
|              | 2462           | 11  | 54.848                            | 59.387         | 55.502          |
|              | 2467           | 12  | 54.614                            | 58.573         | 53.826          |
|              | 2472           | 13  | 44.266                            | 47.777         | 44.252          |
| HE20<br>52T  | 2412           | 1   | 53.853                            | 56.035         | 52.285          |
|              | 2437           | 6   | 52.278                            | 55.387         | 55.693          |
|              | 2462           | 11  | 53.993                            | 57.906         | 54.410          |
|              | 2467           | 12  | 53.230                            | 53.569         | 53.617          |
|              | 2472           | 13  | 46.029                            | 46.706         | 45.273          |
| HE20<br>106T | 2412           | 1   | 51.184                            | -              | 51.773          |
|              | 2437           | 6   | 52.508                            | -              | 53.811          |
|              | 2462           | 11  | 52.864                            | -              | 54.401          |
|              | 2467           | 12  | 51.074                            | -              | 52.010          |
|              | 2472           | 13  | 46.663                            | -              | 47.700          |
| HE20<br>242T | 2412           | 1   | -                                 | 52.341         | -               |
|              | 2437           | 6   | -                                 | 51.656         | -               |
|              | 2462           | 11  | -                                 | 50.057         | -               |
|              | 2467           | 12  | -                                 | 52.589         | -               |
|              | 2472           | 13  | -                                 | 46.296         | -               |
| HE20<br>SU   | 2412           | 1   | -                                 | 52.583         | -               |
|              | 2437           | 6   | -                                 | 50.645         | -               |
|              | 2462           | 11  | -                                 | 49.859         | -               |
|              | 2467           | 12  | -                                 | 51.555         | -               |
|              | 2472           | 13  | -                                 | 46.367         | -               |

## [SISO ANT.2]

| Mode         | Freq.<br>[MHz] | CH. | Conducted Spurious Emissions [dB] |                |                 |
|--------------|----------------|-----|-----------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low                    | RU Index : Mid | RU Index : High |
|              |                |     | ANT2                              | ANT2           | ANT2            |
| HE20<br>26T  | 2412           | 1   | 50.324                            | 55.763         | 52.675          |
|              | 2437           | 6   | 51.332                            | 57.490         | 50.833          |
|              | 2462           | 11  | 50.808                            | 54.974         | 50.532          |
|              | 2467           | 12  | 50.651                            | 55.593         | 51.950          |
|              | 2472           | 13  | 45.785                            | 49.552         | 45.230          |
| HE20<br>52T  | 2412           | 1   | 51.084                            | 52.590         | 50.798          |
|              | 2437           | 6   | 49.623                            | 52.638         | 50.874          |
|              | 2462           | 11  | 48.860                            | 53.461         | 51.331          |
|              | 2467           | 12  | 49.063                            | 51.880         | 48.189          |
|              | 2472           | 13  | 48.520                            | 49.833         | 45.671          |
| HE20<br>106T | 2412           | 1   | 51.097                            | -              | 51.044          |
|              | 2437           | 6   | 51.012                            | -              | 49.801          |
|              | 2462           | 11  | 50.358                            | -              | 50.634          |
|              | 2467           | 12  | 49.106                            | -              | 49.500          |
|              | 2472           | 13  | 49.762                            | -              | 48.236          |
| HE20<br>242T | 2412           | 1   | -                                 | 47.394         | -               |
|              | 2437           | 6   | -                                 | 48.961         | -               |
|              | 2462           | 11  | -                                 | 48.195         | -               |
|              | 2467           | 12  | -                                 | 45.964         | -               |
|              | 2472           | 13  | -                                 | 44.896         | -               |
| HE20<br>SU   | 2412           | 1   | -                                 | 49.593         | -               |
|              | 2437           | 6   | -                                 | 50.324         | -               |
|              | 2462           | 11  | -                                 | 48.695         | -               |
|              | 2467           | 12  | -                                 | 48.243         | -               |
|              | 2472           | 13  | -                                 | 44.956         | -               |

## [MIMO\_SDM(Ant. 1)]

| Mode         | Freq.<br>[MHz] | CH. | Conducted Spurious Emissions [dB] |                |                 |
|--------------|----------------|-----|-----------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low                    | RU Index : Mid | RU Index : High |
|              |                |     | ANT1                              | ANT1           | ANT1            |
| HE20<br>26T  | 2412           | 1   | 51.324                            | 57.166         | 51.155          |
|              | 2437           | 6   | 50.742                            | 56.060         | 53.774          |
|              | 2462           | 11  | 52.921                            | 53.562         | 50.856          |
|              | 2467           | 12  | 50.904                            | 57.336         | 51.494          |
|              | 2472           | 13  | 44.584                            | 50.004         | 42.109          |
| HE20<br>52T  | 2412           | 1   | 50.252                            | 54.122         | 50.891          |
|              | 2437           | 6   | 50.698                            | 53.472         | 51.398          |
|              | 2462           | 11  | 52.426                            | 54.391         | 51.797          |
|              | 2467           | 12  | 50.567                            | 51.466         | 51.459          |
|              | 2472           | 13  | 46.967                            | 48.531         | 44.027          |
| HE20<br>106T | 2412           | 1   | 51.075                            | -              | 50.056          |
|              | 2437           | 6   | 51.096                            | -              | 49.430          |
|              | 2462           | 11  | 51.613                            | -              | 51.729          |
|              | 2467           | 12  | 51.339                            | -              | 50.337          |
|              | 2472           | 13  | 46.985                            | -              | 48.354          |
| HE20<br>242T | 2412           | 1   | -                                 | 50.432         | -               |
|              | 2437           | 6   | -                                 | 48.406         | -               |
|              | 2462           | 11  | -                                 | 50.145         | -               |
|              | 2467           | 12  | -                                 | 48.828         | -               |
|              | 2472           | 13  | -                                 | 48.097         | -               |
| HE20<br>SU   | 2412           | 1   | -                                 | 49.712         | -               |
|              | 2437           | 6   | -                                 | 52.073         | -               |
|              | 2462           | 11  | -                                 | 51.829         | -               |
|              | 2467           | 12  | -                                 | 50.287         | -               |
|              | 2472           | 13  | -                                 | 49.119         | -               |

## [MIMO\_SDM(Ant. 2)]


| Mode         | Freq.<br>[MHz] | CH. | Conducted Spurious Emissions [dB] |                |                 |
|--------------|----------------|-----|-----------------------------------|----------------|-----------------|
|              |                |     | RU Index : Low                    | RU Index : Mid | RU Index : High |
|              |                |     | ANT2                              | ANT2           | ANT2            |
| HE20<br>26T  | 2412           | 1   | 50.155                            | 55.938         | 50.385          |
|              | 2437           | 6   | 51.342                            | 55.561         | 49.894          |
|              | 2462           | 11  | 51.915                            | 53.844         | 48.078          |
|              | 2467           | 12  | 49.071                            | 52.150         | 46.822          |
|              | 2472           | 13  | 42.212                            | 47.219         | 43.945          |
| HE20<br>52T  | 2412           | 1   | 49.443                            | 51.416         | 49.705          |
|              | 2437           | 6   | 49.300                            | 52.668         | 51.205          |
|              | 2462           | 11  | 49.285                            | 51.395         | 49.771          |
|              | 2467           | 12  | 47.926                            | 51.902         | 48.282          |
|              | 2472           | 13  | 44.466                            | 46.709         | 43.837          |
| HE20<br>106T | 2412           | 1   | 49.325                            | -              | 50.085          |
|              | 2437           | 6   | 50.565                            | -              | 49.483          |
|              | 2462           | 11  | 48.089                            | -              | 49.265          |
|              | 2467           | 12  | 48.599                            | -              | 48.546          |
|              | 2472           | 13  | 45.171                            | -              | 47.652          |
| HE20<br>242T | 2412           | 1   | -                                 | 47.491         | -               |
|              | 2437           | 6   | -                                 | 50.210         | -               |
|              | 2462           | 11  | -                                 | 45.196         | -               |
|              | 2467           | 12  | -                                 | 48.210         | -               |
|              | 2472           | 13  | -                                 | 47.245         | -               |
| HE20<br>SU   | 2412           | 1   | -                                 | 57.231         | -               |
|              | 2437           | 6   | -                                 | 56.269         | -               |
|              | 2462           | 11  | -                                 | 52.271         | -               |
|              | 2467           | 12  | -                                 | 46.775         | -               |
|              | 2472           | 13  | -                                 | 45.885         | -               |

## Test Plots


### Note:

In order to simplify the report, attached plots were only the worst case.

MIMO\_SDM(Ant. 1) BW20M Ch.13(2 472 MHz) 26T RU 8

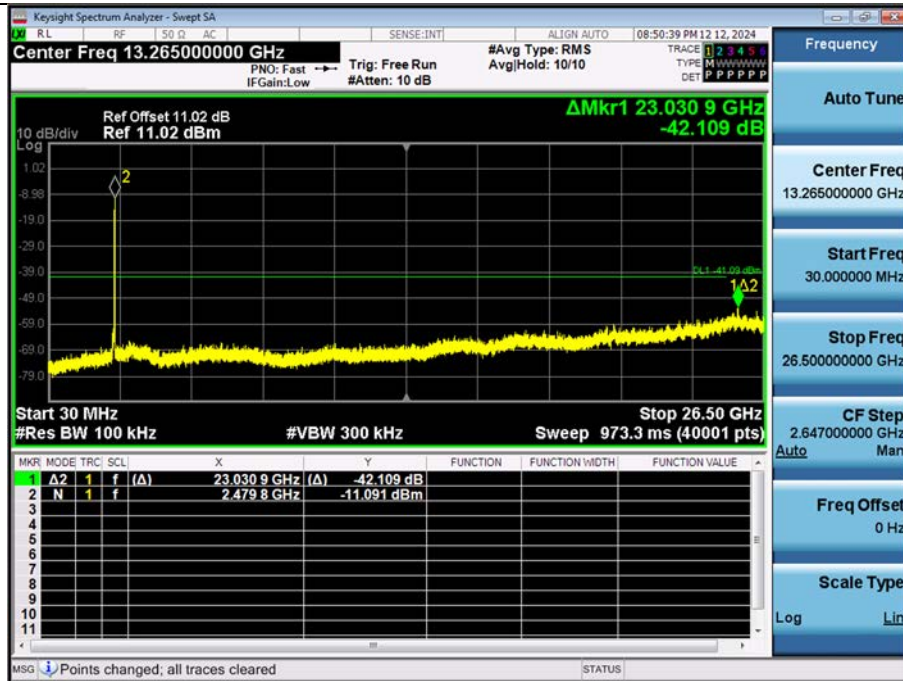

MIMO\_SDM(Ant. 2) BW20M Ch.13(2 472 MHz) 26T RU 0

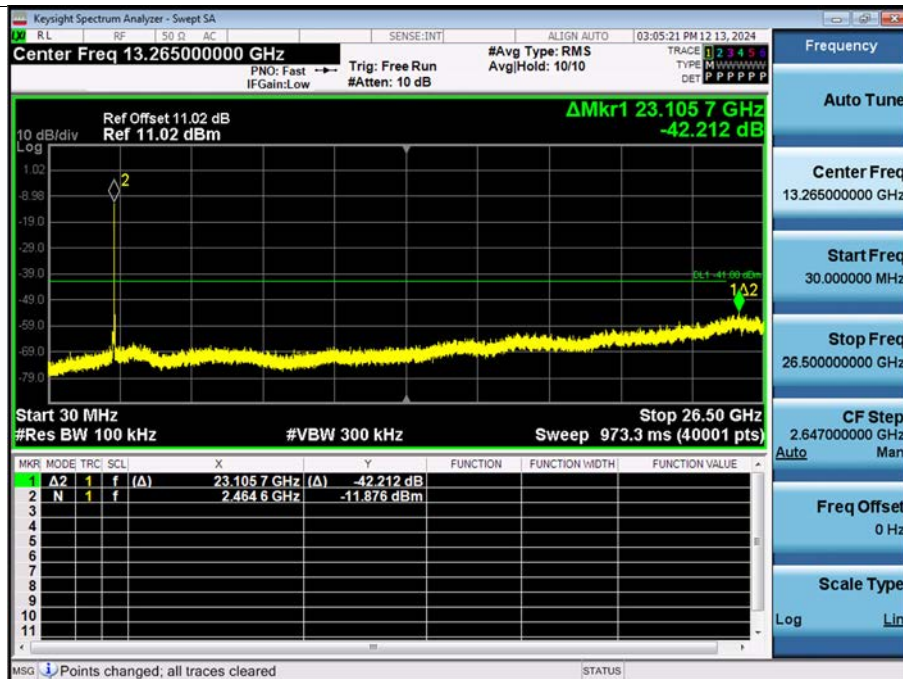

## 9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

| Frequency               | Measured Value | A.F+C.L+D.F | POL   | Total    | Limit    | Margin |
|-------------------------|----------------|-------------|-------|----------|----------|--------|
| [MHz]                   | [dBμV/m]       | [dB/m]      | [H/V] | [dBμV/m] | [dBμV/m] | [dB]   |
| No Critical peaks found |                |             |       |          |          |        |

**Note:**

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

| Frequency               | Measured Value | A.F+C.L | POL   | Total    | Limit    | Margin |
|-------------------------|----------------|---------|-------|----------|----------|--------|
| [MHz]                   | [dBμV/m]       | [dB/m]  | [H/V] | [dBμV/m] | [dBμV/m] | [dB]   |
| No Critical peaks found |                |         |       |          |          |        |

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

[MIMO\_SDM(Ant.1+Ant.2)]

| Band : DTS      |                       |            | Operation Mode :   |                | 802.11ax_HT20 MCS0 26T RU4 |                |             |                  |
|-----------------|-----------------------|------------|--------------------|----------------|----------------------------|----------------|-------------|------------------|
| CH.1 2412 MHz   |                       |            | Transfer Rate :    |                | MCS0                       |                |             |                  |
| Frequency [MHz] | Measured value [dBμV] | D.C.F [dB] | CL+AF+DF-AG [dB/m] | ANT. POL [H/V] | Total [dBμV/m]             | Limit [dBμV/m] | Margin [dB] | Measurement Type |
| 4824            | 48.27                 | 0.00       | 3.91               | V              | 52.18                      | 73.98          | 21.80       | PK               |
| 4824            | 35.36                 | 0.17       | 3.91               | V              | 39.43                      | 53.98          | 14.55       | AV               |
| 7236            | 49.94                 | 0.00       | 9.99               | V              | 59.93                      | 73.98          | 14.05       | PK               |
| 7236            | 34.23                 | 0.17       | 9.99               | V              | 44.39                      | 53.98          | 9.59        | AV               |
| 4824            | 48.49                 | 0.00       | 3.91               | H              | 52.40                      | 73.98          | 21.58       | PK               |
| 4824            | 35.68                 | 0.17       | 3.91               | H              | 39.76                      | 53.98          | 14.22       | AV               |
| 7236            | 49.26                 | 0.00       | 9.99               | H              | 59.25                      | 73.98          | 14.73       | PK               |
| 7236            | 34.18                 | 0.17       | 9.99               | H              | 44.34                      | 53.98          | 9.64        | AV               |

| Band : DTS      |                       |            | Operation Mode :   |                | 802.11ax_HT20 MCS0 26T RU4 |                |             |                  |
|-----------------|-----------------------|------------|--------------------|----------------|----------------------------|----------------|-------------|------------------|
| CH.6 2437 MHz   |                       |            | Transfer Rate :    |                | MCS0                       |                |             |                  |
| Frequency [MHz] | Measured value [dBμV] | D.C.F [dB] | CL+AF+DF-AG [dB/m] | ANT. POL [H/V] | Total [dBμV/m]             | Limit [dBμV/m] | Margin [dB] | Measurement Type |
| 4874            | 44.72                 | 0.00       | 4.16               | V              | 48.88                      | 73.98          | 25.10       | PK               |
| 4874            | 33.08                 | 0.17       | 4.16               | V              | 37.41                      | 53.98          | 16.57       | AV               |
| 7311            | 45.29                 | 0.00       | 10.47              | V              | 55.76                      | 73.98          | 18.22       | PK               |
| 7311            | 31.85                 | 0.17       | 10.47              | V              | 42.49                      | 53.98          | 11.49       | AV               |
| 4874            | 45.07                 | 0.00       | 4.16               | H              | 49.23                      | 73.98          | 24.75       | PK               |
| 4874            | 33.20                 | 0.17       | 4.16               | H              | 37.53                      | 53.98          | 16.45       | AV               |
| 7311            | 46.04                 | 0.00       | 10.47              | H              | 56.51                      | 73.98          | 17.47       | PK               |
| 7311            | 32.25                 | 0.17       | 10.47              | H              | 42.89                      | 53.98          | 11.09       | AV               |

| Band : DTS      |                       |            | Operation Mode :   |                | 802.11ax_HT20 MCS0 26T RU4 |                |             |                  |
|-----------------|-----------------------|------------|--------------------|----------------|----------------------------|----------------|-------------|------------------|
| CH.11 2462 MHz  |                       |            | Transfer Rate :    |                | MCS0                       |                |             |                  |
| Frequency [MHz] | Measured value [dBμV] | D.C.F [dB] | CL+AF+DF-AG [dB/m] | ANT. POL [H/V] | Total [dBμV/m]             | Limit [dBμV/m] | Margin [dB] | Measurement Type |
| 4924            | 45.10                 | 0.00       | 3.45               | V              | 48.55                      | 73.98          | 25.43       | PK               |
| 4924            | 32.75                 | 0.17       | 3.45               | V              | 36.37                      | 53.98          | 17.61       | AV               |
| 7386            | 44.29                 | 0.00       | 11.22              | V              | 55.51                      | 73.98          | 18.47       | PK               |
| 7386            | 30.51                 | 0.17       | 11.22              | V              | 41.90                      | 53.98          | 12.08       | AV               |
| 4924            | 45.14                 | 0.00       | 3.45               | H              | 48.59                      | 73.98          | 25.39       | PK               |
| 4924            | 33.10                 | 0.17       | 3.45               | H              | 36.72                      | 53.98          | 17.26       | AV               |
| 7386            | 44.55                 | 0.00       | 11.22              | H              | 55.77                      | 73.98          | 18.21       | PK               |
| 7386            | 30.78                 | 0.17       | 11.22              | H              | 42.17                      | 53.98          | 11.81       | AV               |

| Band : DTS      |                       |            | Operation Mode :   |                | 802.11ax_HT20 MCS0 SU |                |             |                  |
|-----------------|-----------------------|------------|--------------------|----------------|-----------------------|----------------|-------------|------------------|
| CH.1 2412 MHz   |                       |            | Transfer Rate :    |                | MCS0                  |                |             |                  |
| Frequency [MHz] | Measured value [dBμV] | D.C.F [dB] | CL+AF+DF-AG [dB/m] | ANT. POL [H/V] | Total [dBμV/m]        | Limit [dBμV/m] | Margin [dB] | Measurement Type |
| 4824            | 47.51                 | 0.00       | 3.91               | V              | 51.42                 | 73.98          | 22.56       | PK               |
| 4824            | 35.32                 | 0.90       | 3.91               | V              | 40.13                 | 53.98          | 13.85       | AV               |
| 7236            | 48.55                 | 0.00       | 9.99               | V              | 58.54                 | 73.98          | 15.44       | PK               |
| 7236            | 34.47                 | 0.90       | 9.99               | V              | 45.36                 | 53.98          | 8.62        | AV               |
| 4824            | 46.35                 | 0.00       | 3.91               | H              | 50.26                 | 73.98          | 23.72       | PK               |
| 4824            | 34.29                 | 0.90       | 3.91               | H              | 39.10                 | 53.98          | 14.88       | AV               |
| 7236            | 48.19                 | 0.00       | 9.99               | H              | 58.18                 | 73.98          | 15.80       | PK               |
| 7236            | 34.27                 | 0.90       | 9.99               | H              | 45.16                 | 53.98          | 8.82        | AV               |

| Band : DTS      |                       |            | Operation Mode :   |                | 802.11ax_HT20 MCS0 SU |                |             |                  |
|-----------------|-----------------------|------------|--------------------|----------------|-----------------------|----------------|-------------|------------------|
| CH.6 2437 MHz   |                       |            | Transfer Rate :    |                | MCS0                  |                |             |                  |
| Frequency [MHz] | Measured value [dBμV] | D.C.F [dB] | CL+AF+DF-AG [dB/m] | ANT. POL [H/V] | Total [dBμV/m]        | Limit [dBμV/m] | Margin [dB] | Measurement Type |
| 4874            | 44.43                 | 0.00       | 4.16               | V              | 48.59                 | 73.98          | 25.39       | PK               |
| 4874            | 32.51                 | 0.90       | 4.16               | V              | 37.57                 | 53.98          | 16.41       | AV               |
| 7311            | 47.98                 | 0.00       | 10.47              | V              | 58.45                 | 73.98          | 15.53       | PK               |
| 7311            | 33.76                 | 0.90       | 10.47              | V              | 45.13                 | 53.98          | 8.85        | AV               |
| 4874            | 45.30                 | 0.00       | 4.16               | H              | 49.46                 | 73.98          | 24.52       | PK               |
| 4874            | 32.97                 | 0.90       | 4.16               | H              | 38.03                 | 53.98          | 15.95       | AV               |
| 7311            | 47.28                 | 0.00       | 10.47              | H              | 57.75                 | 73.98          | 16.23       | PK               |
| 7311            | 33.59                 | 0.90       | 10.47              | H              | 44.96                 | 53.98          | 9.02        | AV               |


| Band : DTS      |                       |            | Operation Mode :   |                | 802.11ax_HT20 MCS0 SU |                |             |                  |
|-----------------|-----------------------|------------|--------------------|----------------|-----------------------|----------------|-------------|------------------|
| CH.11 2462 MHz  |                       |            | Transfer Rate :    |                | MCS0                  |                |             |                  |
| Frequency [MHz] | Measured value [dBμV] | D.C.F [dB] | CL+AF+DF-AG [dB/m] | ANT. POL [H/V] | Total [dBμV/m]        | Limit [dBμV/m] | Margin [dB] | Measurement Type |
| 4924            | 44.57                 | 0.00       | 3.45               | V              | 48.02                 | 73.98          | 25.96       | PK               |
| 4924            | 33.16                 | 0.90       | 3.45               | V              | 37.51                 | 53.98          | 16.47       | AV               |
| 7386            | 44.16                 | 0.00       | 11.22              | V              | 55.38                 | 73.98          | 18.60       | PK               |
| 7386            | 31.71                 | 0.90       | 11.22              | V              | 43.83                 | 53.98          | 10.15       | AV               |
| 4924            | 44.86                 | 0.00       | 3.45               | H              | 48.31                 | 73.98          | 25.67       | PK               |
| 4924            | 33.34                 | 0.90       | 3.45               | H              | 37.69                 | 53.98          | 16.29       | AV               |
| 7386            | 44.03                 | 0.00       | 11.22              | H              | 55.25                 | 73.98          | 18.73       | PK               |
| 7386            | 31.55                 | 0.90       | 11.22              | H              | 43.67                 | 53.98          | 10.31       | AV               |

## Test Plots


[MIMO\_SDM(Ant.1+Ant.2)]

**Note:** In order to simplify, Plots of worst case are only reported.

Radiated Spurious Emissions plot – Average result (802.11ax(HE20), Ch.1 3rd Harmonic, Z-V, SU)

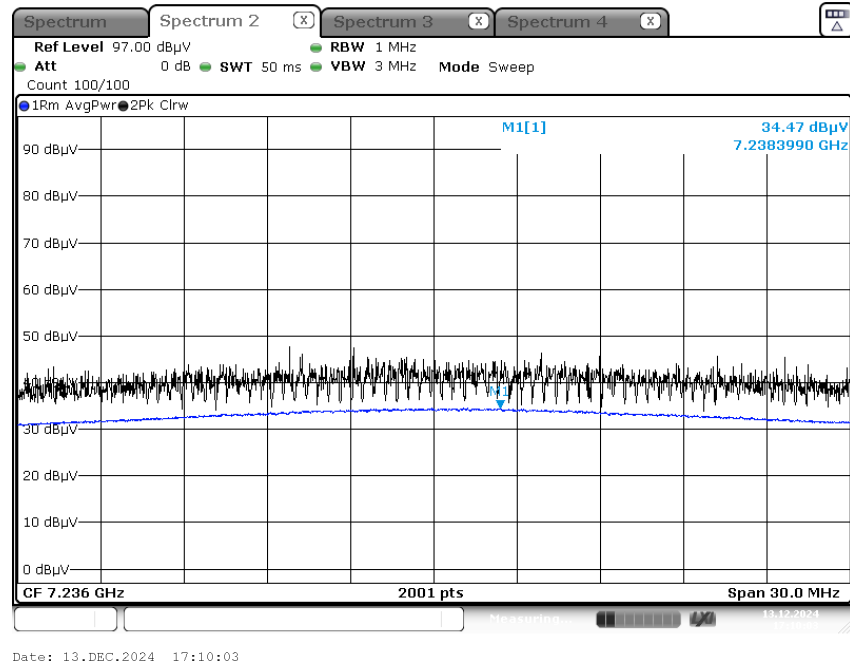

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20), Ch.1 3rd Harmonic, Z-V, SU)

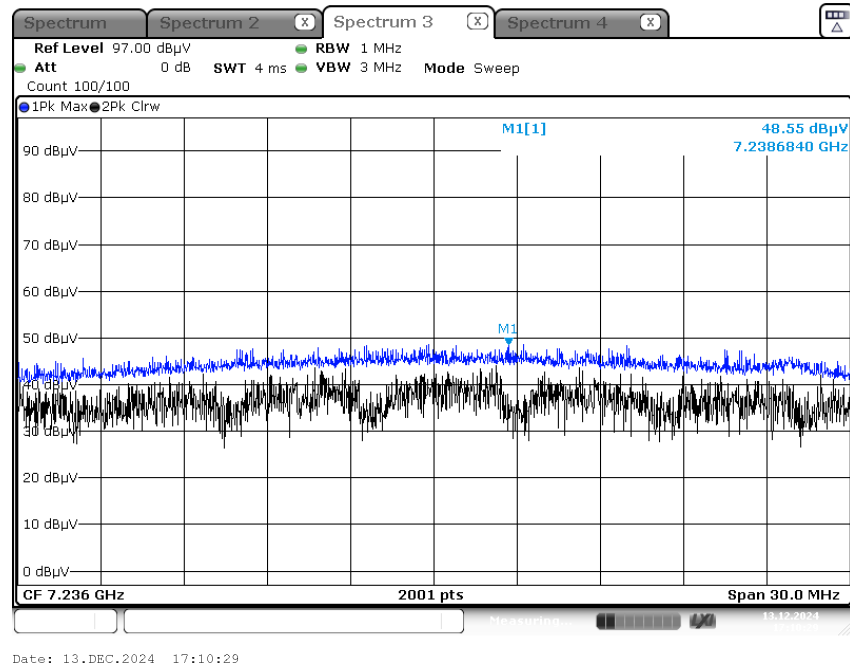

## 9.7 RADIATED RESTRICTED BAND EDGES

Note : # integration method Used (ANSI C63.10 Section11.13.3)

[MIMO\_SDM(Ant.1+Ant.2)]

| 802.11ax(MCS0) |                |                   | HE20        |          |          | SU       |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|----------|--------|------------------|
| Channel        | CH 1           |                   | Freq        | 2412 MHz |          |          |        |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit    | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m] | [dB]   |                  |
| #2390          | 64.67          | 0.00              | -           | H        | 64.67    | 73.98    | 9.31   | PK               |
| #2390          | 50.86          | 0.91              | -           | H        | 51.77    | 53.98    | 2.21   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        |          |          | SU       |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|----------|--------|------------------|
| Channel        | CH 10          |                   | Freq        | 2457 MHz |          |          |        |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit    | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m] | [dB]   |                  |
| #2483.5        | 62.00          | 0.00              | -           | H        | 62.00    | 73.98    | 11.98  | PK               |
| #2483.5        | 50.77          | 0.91              | -           | H        | 51.68    | 53.98    | 2.30   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        |          |          | SU       |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|----------|--------|------------------|
| Channel        | CH 11          |                   | Freq        | 2462 MHz |          |          |        |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit    | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m] | [dB]   |                  |
| #2483.5        | 62.08          | 0.00              | -           | H        | 62.08    | 73.98    | 11.90  | PK               |
| #2483.5        | 50.22          | 0.91              | -           | H        | 51.13    | 53.98    | 2.85   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        |          |          | SU       |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|----------|--------|------------------|
| Channel        | CH 12          |                   | Freq        | 2467 MHz |          |          |        |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit    | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m] | [dB]   |                  |
| #2483.5        | 56.06          | 0.00              | -           | H        | 56.06    | 73.98    | 17.92  | PK               |
| #2483.5        | 45.49          | 0.91              | -           | H        | 46.40    | 53.98    | 7.58   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        |          |          | SU       |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|----------|--------|------------------|
| Channel        | CH 13          |                   | Freq        | 2472 MHz |          |          |        |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit    | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m] | [dB]   |                  |
| #2483.5        | 61.59          | 0.00              | -           | H        | 61.59    | 73.98    | 12.39  | PK               |
| #2483.5        | 50.24          | 0.91              | -           | H        | 51.15    | 53.98    | 2.83   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 242T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 1           |                   | Freq        | 2412 MHz |          | RU offset | 61     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2390          | 59.86          | 0.00              | -           | H        | 59.86    | 73.98     | 14.12  | PK               |
| #2390          | 44.22          | 0.90              | -           | H        | 45.12    | 53.98     | 8.86   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 242T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 11          |                   | Freq        | 2462 MHz |          | RU offset | 61     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 53.05          | 0.00              | -           | H        | 53.05    | 73.98     | 20.93  | PK               |
| #2483.5        | 43.84          | 0.90              | -           | H        | 44.74    | 53.98     | 9.24   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 242T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 12          |                   | Freq        | 2467 MHz |          | RU offset | 61     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 53.44          | 0.00              | -           | H        | 53.44    | 73.98     | 20.54  | PK               |
| #2483.5        | 43.88          | 0.90              | -           | H        | 44.78    | 53.98     | 9.20   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 242T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 13          |                   | Freq        | 2472 MHz |          | RU offset | 61     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 63.05          | 0.00              | -           | H        | 63.05    | 73.98     | 10.93  | PK               |
| #2483.5        | 50.22          | 0.90              | -           | H        | 51.12    | 53.98     | 2.86   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 106T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 1           |                   | Freq        | 2412 MHz |          | RU offset | 53     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2390          | 60.06          | 0.00              | -           | H        | 60.06    | 73.98     | 13.92  | PK               |
| #2390          | 44.08          | 0.44              | -           | H        | 44.52    | 53.98     | 9.46   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 106T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 11          |                   | Freq        | 2462 MHz |          | RU offset | 54     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 52.84          | 0.00              | -           | H        | 52.84    | 73.98     | 21.14  | PK               |
| #2483.5        | 43.90          | 0.44              | -           | H        | 44.34    | 53.98     | 9.64   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 106T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 12          |                   | Freq        | 2467 MHz |          | RU offset | 54     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 53.46          | 0.00              | -           | H        | 53.46    | 73.98     | 20.52  | PK               |
| #2483.5        | 43.89          | 0.44              | -           | H        | 44.33    | 53.98     | 9.65   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 106T     |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 13          |                   | Freq        | 2472 MHz |          | RU offset | 54     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 64.11          | 0.00              | -           | H        | 64.11    | 73.98     | 9.87   | PK               |
| #2483.5        | 50.60          | 0.44              | -           | H        | 51.04    | 53.98     | 2.94   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 52T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 1           |                   | Freq        | 2412 MHz |          | RU offset | 37     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2390          | 58.23          | 0.00              | -           | H        | 58.23    | 73.98     | 15.75  | PK               |
| #2390          | 43.98          | 0.10              | -           | H        | 44.08    | 53.98     | 9.90   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 52T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 11          |                   | Freq        | 2462 MHz |          | RU offset | 40     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 53.78          | 0.00              | -           | H        | 53.78    | 73.98     | 20.20  | PK               |
| #2483.5        | 43.85          | 0.10              | -           | H        | 43.95    | 53.98     | 10.03  | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 52T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 12          |                   | Freq        | 2467 MHz |          | RU offset | 40     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 53.14          | 0.00              | -           | H        | 53.14    | 73.98     | 20.84  | PK               |
| #2483.5        | 43.89          | 0.10              | -           | H        | 43.99    | 53.98     | 9.99   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 52T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 13          |                   | Freq        | 2472 MHz |          | RU offset | 40     |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 64.10          | 0.00              | -           | H        | 64.10    | 73.98     | 9.88   | PK               |
| #2483.5        | 51.22          | 0.10              | -           | H        | 51.32    | 53.98     | 2.66   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 26T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 1           |                   | Freq        | 2412 MHz |          | RU offset | 0      |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2390          | 59.16          | 0.00              | -           | H        | 59.16    | 73.98     | 14.82  | PK               |
| #2390          | 44.00          | 0.91              | -           | H        | 44.91    | 53.98     | 9.07   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 26T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 11          |                   | Freq        | 2462 MHz |          | RU offset | 8      |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 54.21          | 0.00              | -           | H        | 54.21    | 73.98     | 19.77  | PK               |
| #2483.5        | 43.85          | 0.17              | -           | H        | 44.02    | 53.98     | 9.96   | AV               |

| 802.11ax(MCS0) |                |                   | HE20        | 26T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 12          |                   | Freq        | 2467 MHz |          | RU offset | 8      |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 53.65          | 0.00              | -           | H        | 53.65    | 73.98     | 20.33  | PK               |
| #2483.5        | 43.90          | 0.17              | -           | H        | 44.07    | 53.98     | 9.91   | AV               |


| 802.11ax(MCS0) |                |                   | HE20        | 26T      |          |           |        |                  |
|----------------|----------------|-------------------|-------------|----------|----------|-----------|--------|------------------|
| Channel        | CH 13          |                   | Freq        | 2472 MHz |          | RU offset | 8      |                  |
| Frequency      | Measured Value | Duty Cycle Factor | A.F+C.L+D.F | ANT. POL | Total    | Limit     | Margin | Measurement Type |
| [MHz]          | [dBμV]         | [dB]              | [dB/m]      | [H/V]    | [dBμV/m] | [dBμV/m]  | [dB]   |                  |
| #2483.5        | 64.65          | 0.00              | -           | H        | 64.65    | 73.98     | 9.33   | PK               |
| #2483.5        | 50.94          | 0.17              | -           | H        | 51.11    | 53.98     | 2.87   | AV               |

## Test Plots

[MIMO\_SDM(Ant.1+Ant.2)]


**Note:** In order to simplify the report, Plots of worst case are only reported.

Integration method Used\_ Average result(802.11ax HE20, MCS0, SU, ch.1, Y-H)

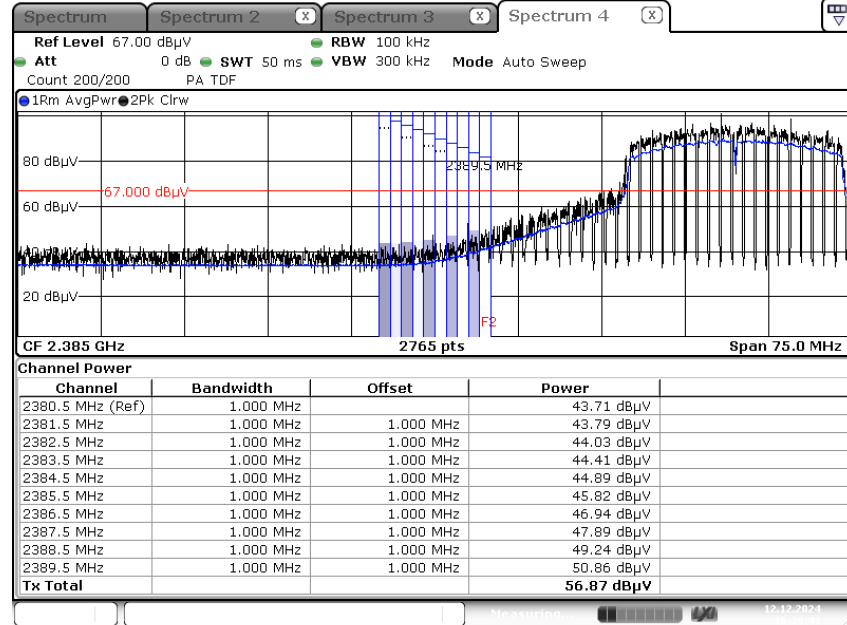

Date: 12.DEC.2024 16:36:43

Integration method Used\_ Peak result(802.11ax HE20, MCS0, SU, ch.1, Y-H)

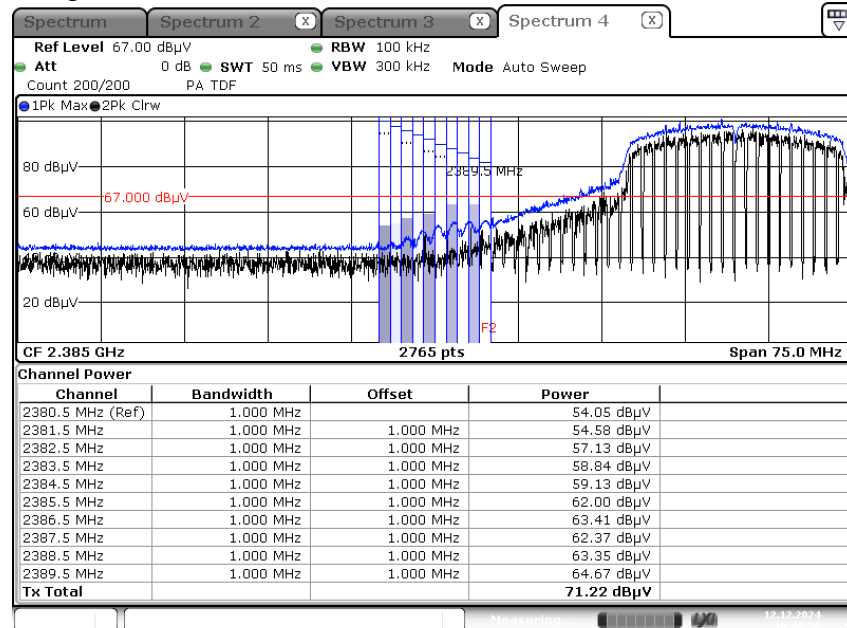

Date: 12.DEC.2024 16:40:56

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

| Equipment                                    | Model     | Manufacturer    | Serial No. | Due to Calibration | Calibration Interval |
|----------------------------------------------|-----------|-----------------|------------|--------------------|----------------------|
| LISN                                         | ENV216    | Rohde & Schwarz | 102245     | 07/17/2025         | Annual               |
| EMI Test Receiver                            | ESR       | Rohde & Schwarz | 101910     | 07/02/2025         | Annual               |
| Temperature Chamber                          | SU-642    | ESPEC           | 93008124   | 02/19/2025         | Annual               |
| Signal Analyzer                              | N9030A    | Keysight        | MY55410508 | 08/23/2025         | Annual               |
| Power Measurement Set                        | OSP 120   | Rohde & Schwarz | 100935     | 08/01/2025         | Annual               |
| Power Meter                                  | N1911A    | Agilent         | MY45100523 | 02/28/2025         | Annual               |
| Power Sensor                                 | N1921A    | Agilent         | MY57820067 | 02/22/2025         | Annual               |
| Directional Coupler                          | 87300B    | Agilent         | 3116A03621 | 10/21/2025         | Annual               |
| Power Splitter                               | 11667B    | Hewlett Packard | 10545      | 02/06/2025         | Annual               |
| DC Power Supply                              | E3632A    | Agilent         | KR75305528 | 01/02/2025         | Annual               |
| Attenuator(10 dB)(DC-26.5 GHz)               | 8493C-010 | Agilent         | 08285      | 05/28/2025         | Annual               |
| Attenuator(20 dB)                            | 18N-20dB  | Rohde & Schwarz | 8          | 02/20/2025         | Annual               |
| Software                                     | EMC32     | Rohde & Schwarz | N/A        | N/A                | N/A                  |
| FCC WLAN&BT&BLE Conducted Test Software v3.0 | N/A       | HCT CO., LTD.   | N/A        | N/A                | N/A                  |
| Bluetooth Tester                             | CBT       | Rohde & Schwarz | 100808     | 02/15/2025         | Annual               |

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

### Radiated Test

| Equipment                           | Model                              | Manufacturer           | Serial No.  | Due to Calibration | Calibration Interval |
|-------------------------------------|------------------------------------|------------------------|-------------|--------------------|----------------------|
| Controller(Antenna mast)            | CO3000                             | Innco system           | CO3000-4p   | N/A                | N/A                  |
| Antenna Position Tower              | MA4640/800-XP-EP                   | Innco system           | S3AM        | 07/30/2025         | Annual               |
| Controller                          | EM2090                             | Emco                   | 060520      | N/A                | N/A                  |
| Turn Table                          | N/A                                | Ets                    | N/A         | N/A                | N/A                  |
| Amp & Filter Bank Switch Controller | FBSM-01A                           | TNM system             | 0           | N/A                | N/A                  |
| Loop Antenna                        | FMZB 1513                          | Rohde & Schwarz        | 1513-333    | 03/07/2026         | Biennial             |
| Hybrid Antenna                      | VULB 9168                          | Schwarzbeck            | 9168-0895   | 08/28/2026         | Biennial             |
| Horn Antenna                        | BBHA 9120D                         | Schwarzbeck            | 9120D-1191  | 11/07/2025         | Biennial             |
| Horn Antenna(15 GHz ~ 40 GHz)       | BBHA9170                           | Schwarzbeck            | BBHA9170124 | 03/28/2025         | Biennial             |
| Band Reject Filter                  | WRCJV2400/2483.5-2370/2520-60/12SS | Wainwright Instruments | 2           | 01/02/2025         | Annual               |
| Band Reject Filter                  | WRCJV12-4900-5100-5900-6100-50SS   | Wainwright Instruments | 5           | 06/04/2025         | Annual               |
| Band Reject Filter                  | WRCJV12-4900-5100-5900-6100-50SS   | Wainwright Instruments | 6           | 06/04/2025         | Annual               |
| Band Reject Filter                  | WRCJV5100/5850-40/50-8EEK          | Wainwright Instruments | 1           | 02/14/2025         | Annual               |
| RF Switching System                 | FBSR-03A (3G HPF+LNA)              | T&M SYSTEM             | S3L1        | 10/31/2025         | Annual               |
| RF Switching System                 | FBSR-03A (10dB ATT+LNA)            | T&M SYSTEM             | S3L2        | 10/31/2025         | Annual               |
| RF Switching System                 | FBSR-03A (7G HPF+LNA)              | T&M SYSTEM             | S3L3        | 10/31/2025         | Annual               |
| RF Switching System                 | FBSR-03A (3dB ATT+LNA)             | T&M SYSTEM             | S3L4        | 10/31/2025         | Annual               |
| Power Amplifier                     | CBL18265035                        | CERNEX                 | 22966       | 11/07/2025         | Annual               |
| Power Amplifier                     | CBL26405040                        | CERNEX                 | 25956       | 02/26/2025         | Annual               |
| Bluetooth Tester                    | TC-3000C                           | TESCOM                 | 3000C000175 | 03/19/2025         | Annual               |
| Spectrum Analyzer                   | FSV40 (9 kHz ~ 40 GHz)             | Rohde & Schwarz        | 100900      | 08/27/2025         | Annual               |

### Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2412-FC078-P |