



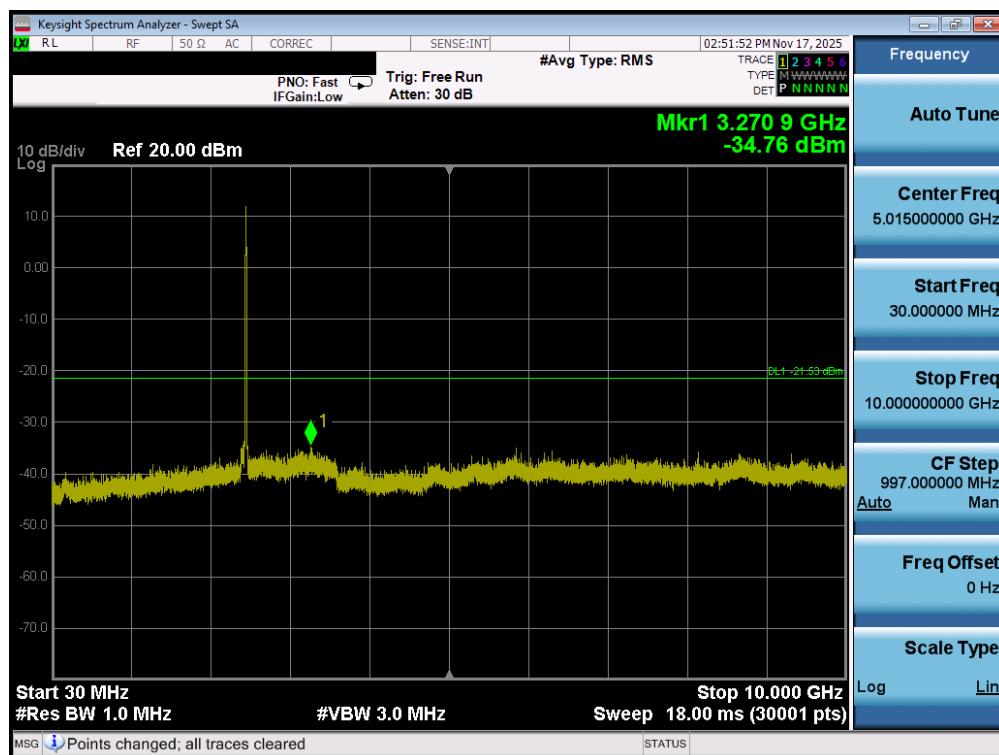


Plot 7-99. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

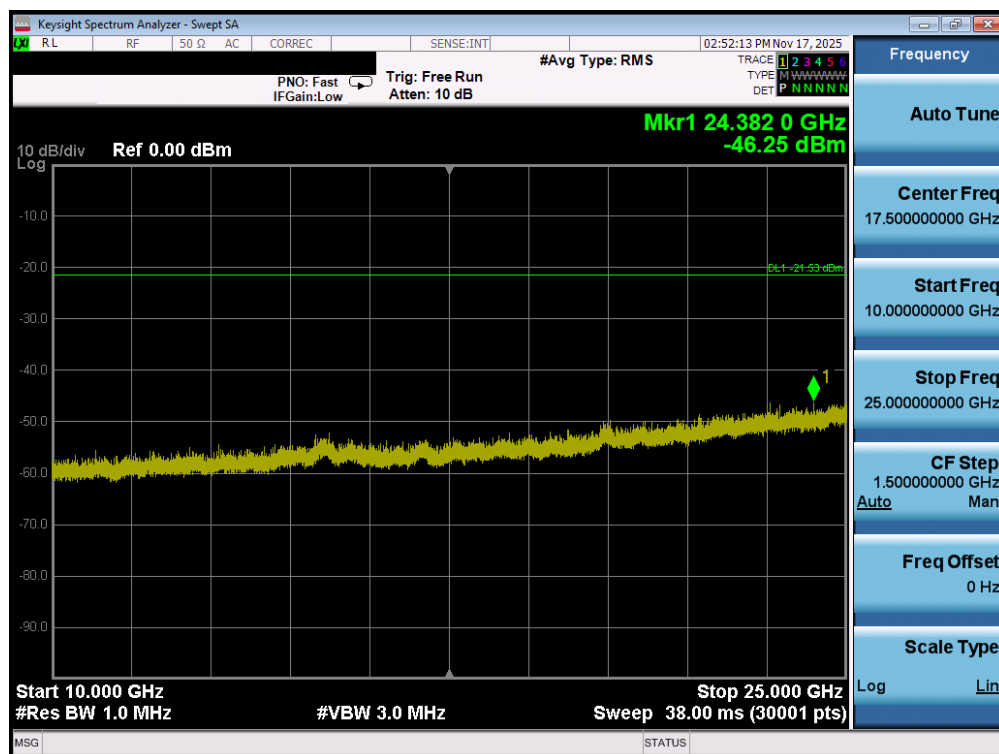


Plot 7-100. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2-A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 78 of 95

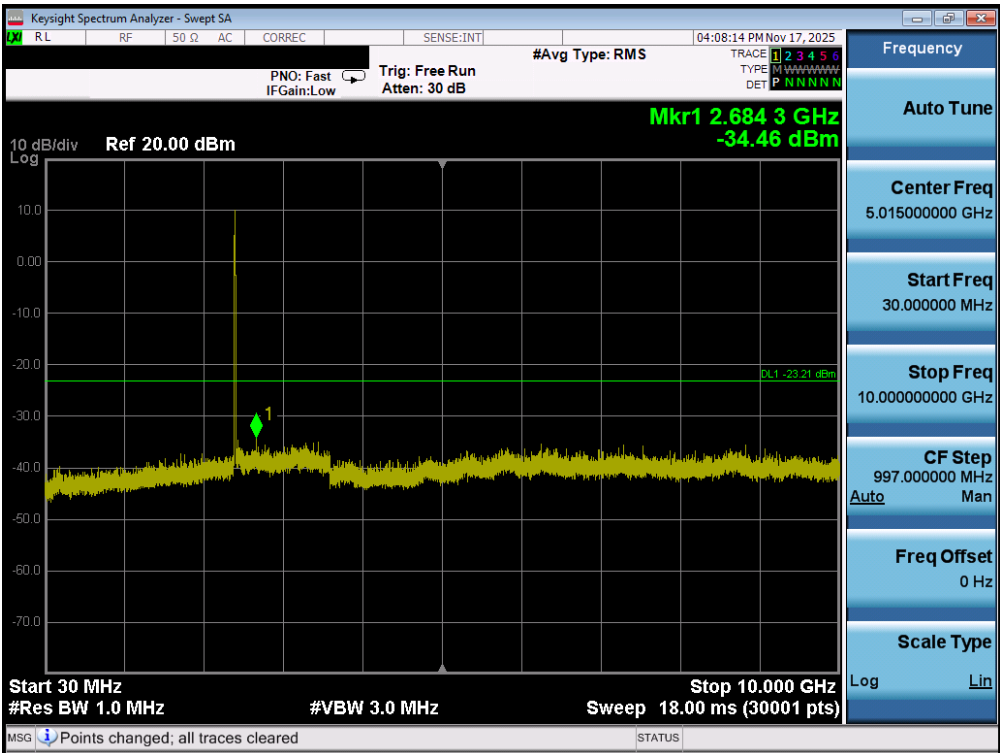


Plot 7-101. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

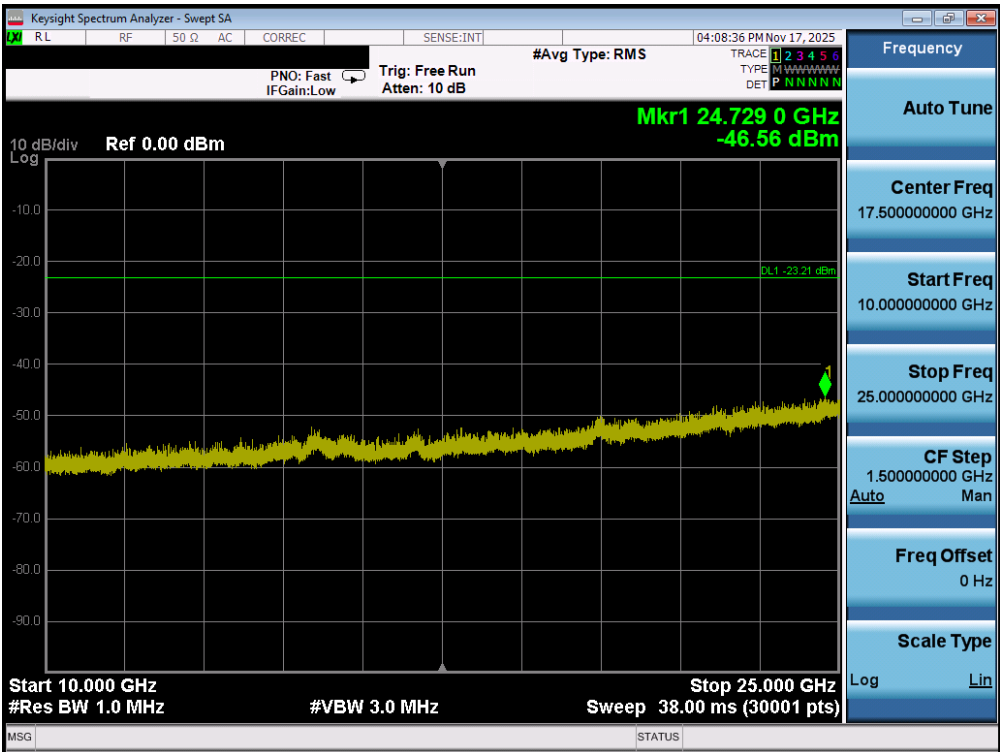


Plot 7-102. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 79 of 95

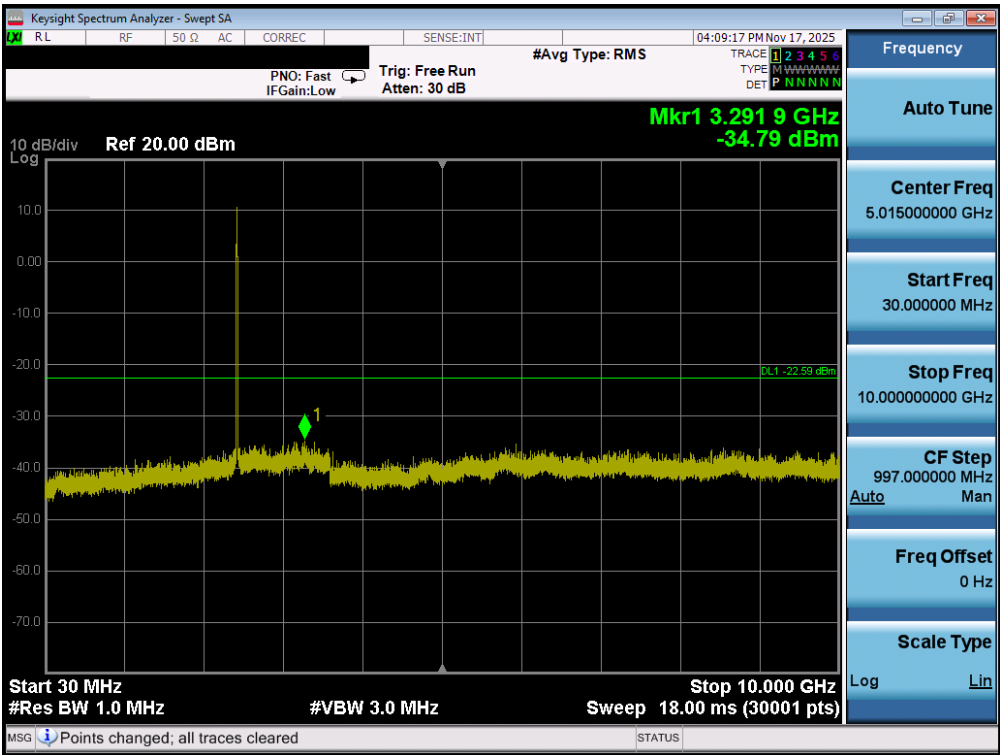


Plot 7-103. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

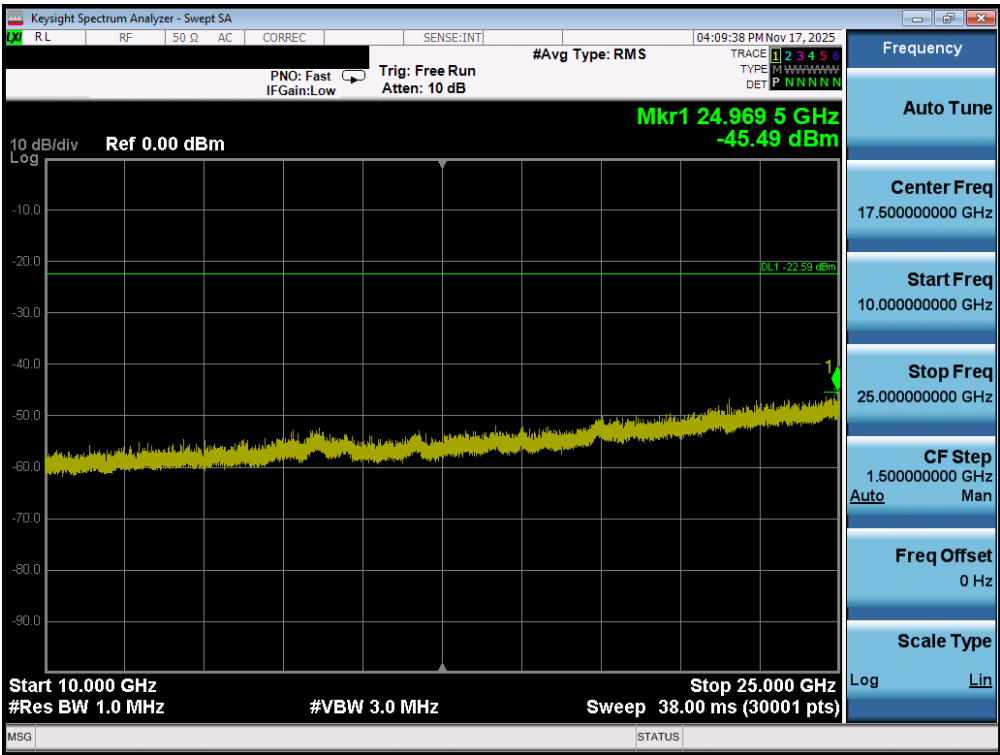


Plot 7-104. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMA576U IC: 649E-SMA576W		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2-A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset		Page 80 of 95

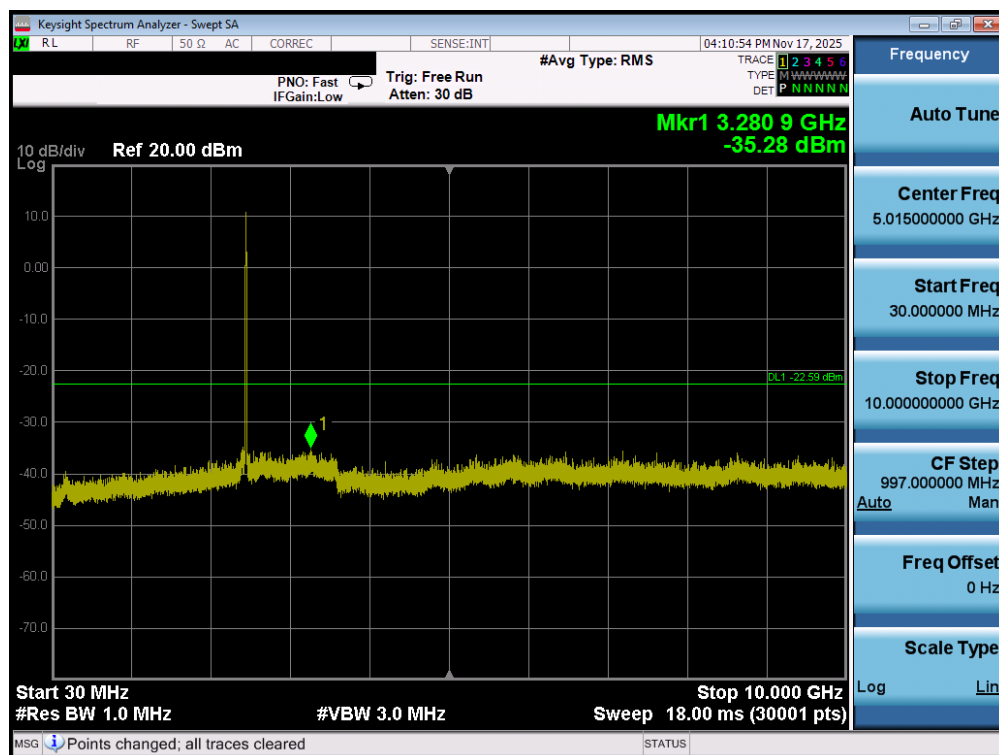

Plot 7-105. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

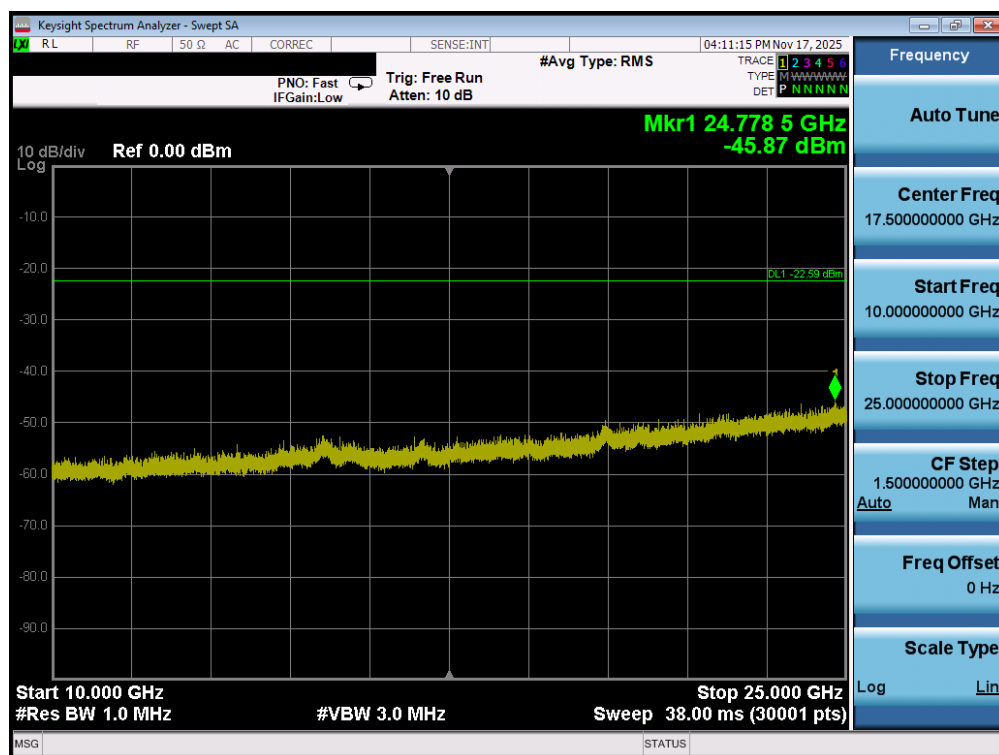

Plot 7-106. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 81 of 95

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings – Above 1GHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 82 of 95

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

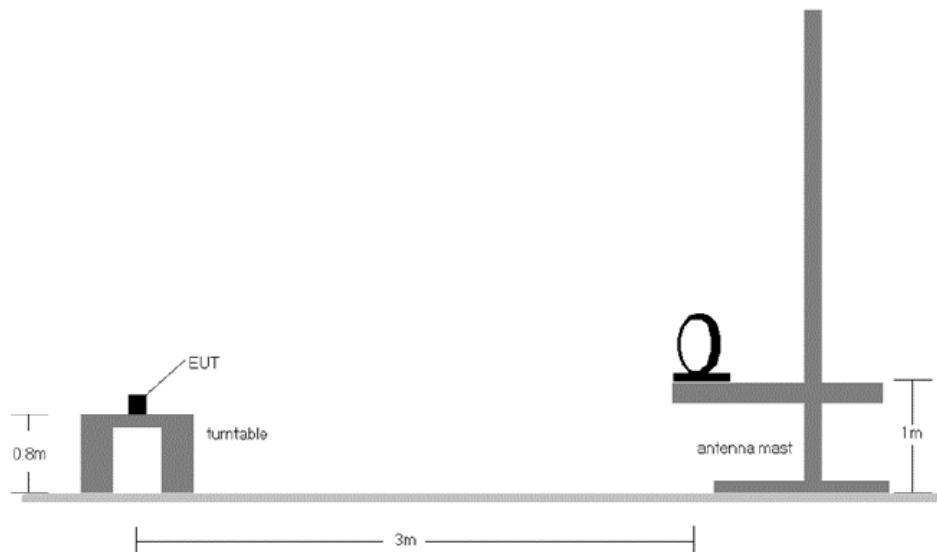


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 83 of 95

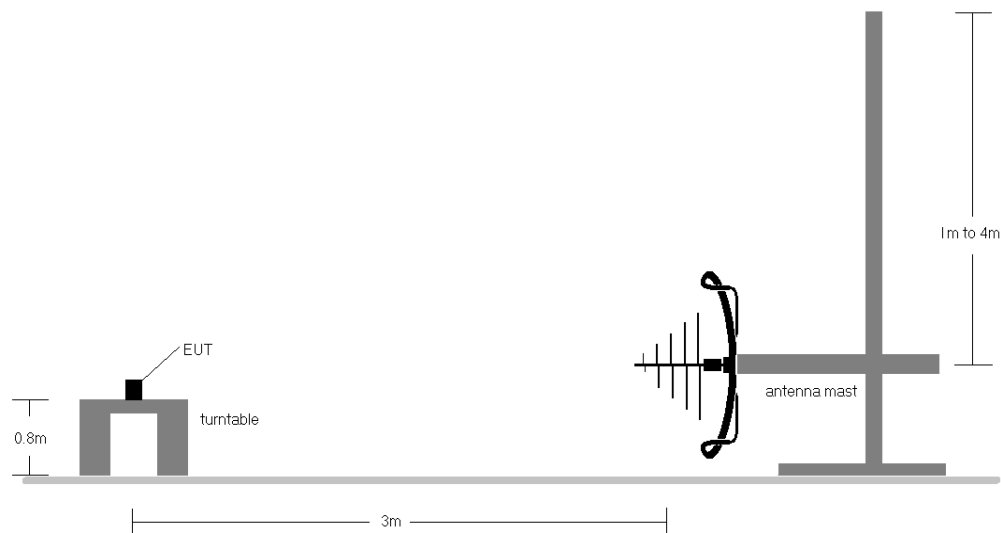


Figure 7-7. Radiated Test Setup < 1GHz

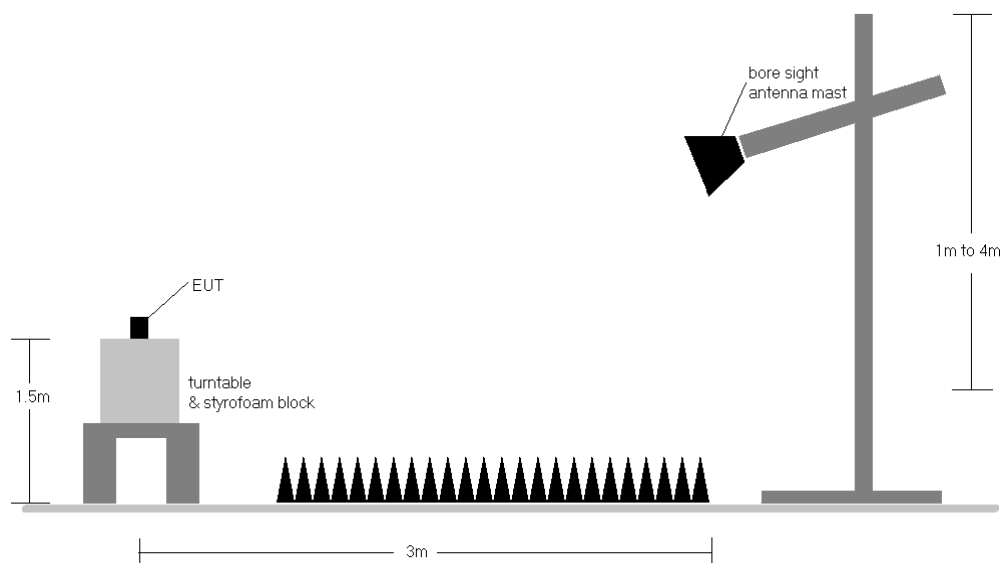


Figure 7-8. Radiated Test Setup > 1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10:2020 Section 11.12.2 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 84 of 95

4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
10. No spurious emissions were detected within 20dB of the limit below 30MHz.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 85 of 95

MIMO Radiated Spurious Emission Measurements

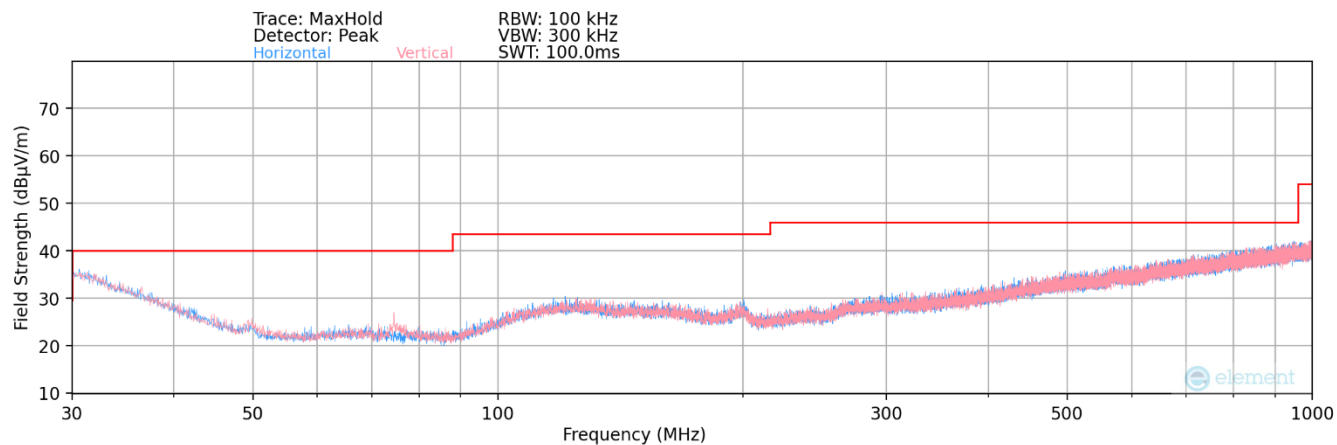


Plot 7-107. Radiated Spurious Plot below 1GHz MIMO


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
75.00	Peak	H	-	-	-92.03	14.79	29.76	40.00	-10.24
200.00	Peak	H	-	-	-91.60	20.10	35.50	43.52	-8.02
475.00	Peak	H	-	-	-91.10	25.50	41.40	46.02	-4.62

Table 7-10. Radiated Measurements below 1GHz MIMO


FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset		Page 86 of 95

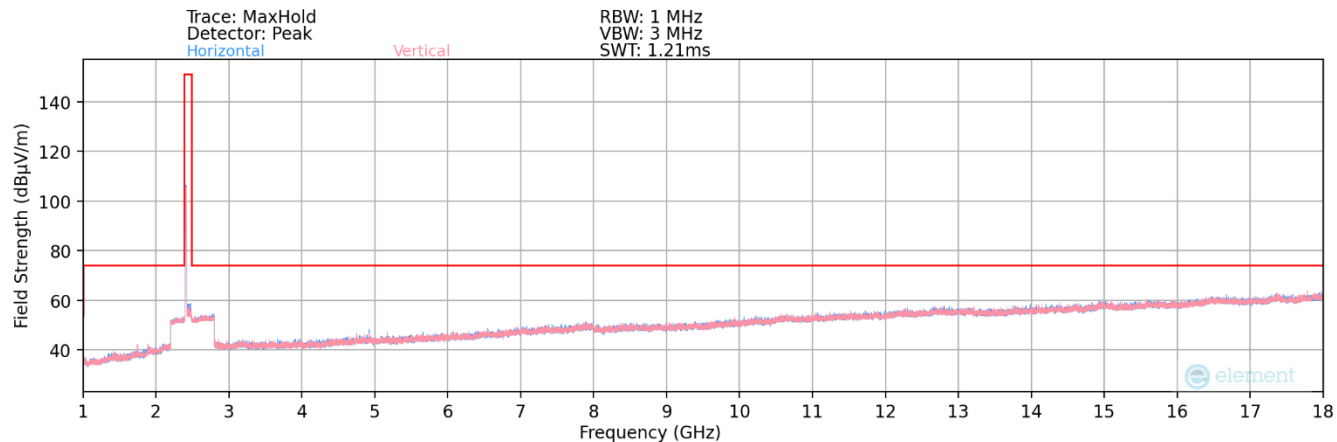

Plot 7-108. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 1)

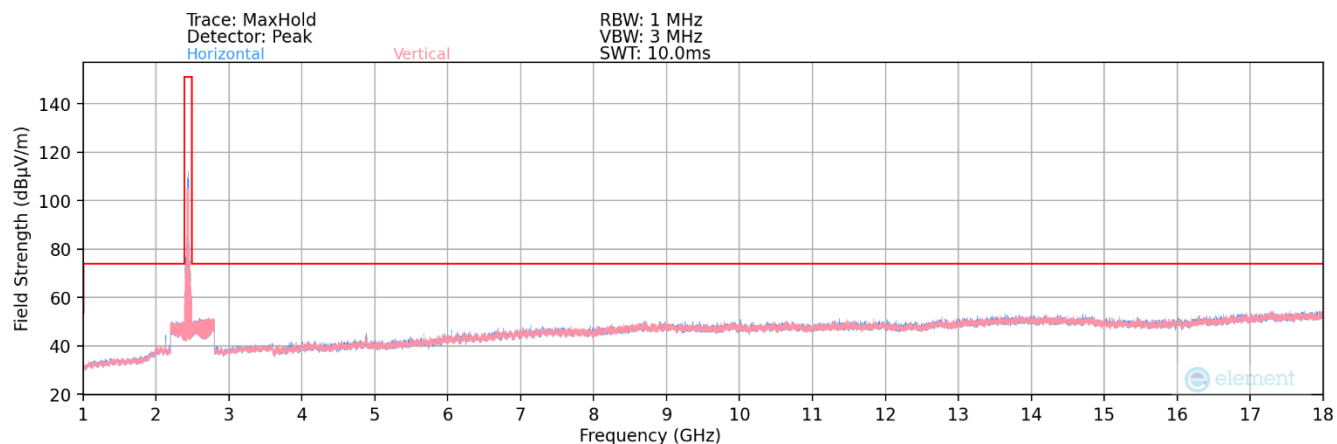


Plot 7-109. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 6)

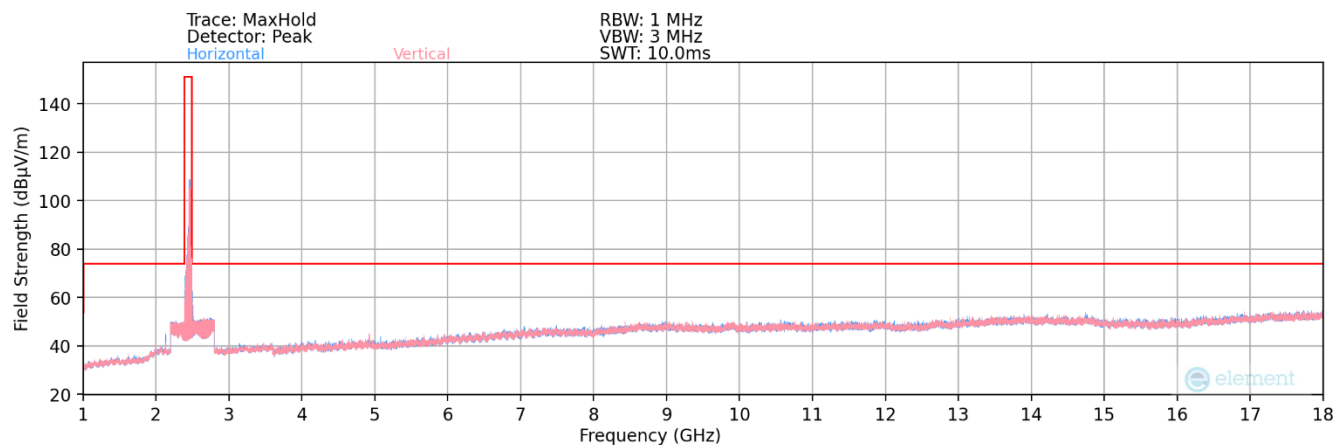

Plot 7-110. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 11)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 87 of 95

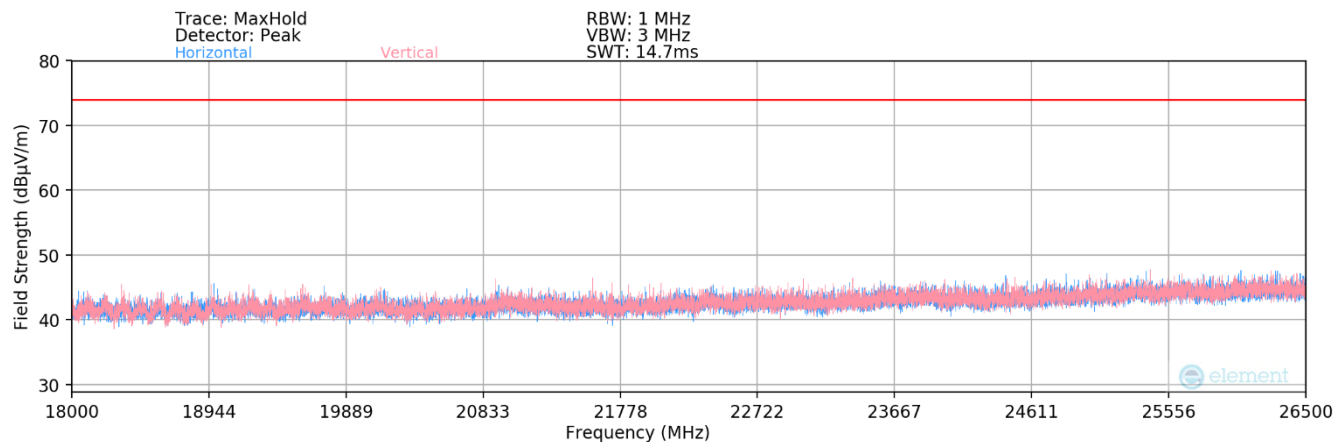

Plot 7-111. Radiated Spurious Plot above 18GHz MIMO

Worst Case Mode: 802.11b

Worst Case Transfer Rate: 1Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	123	303	-69.63	6.62	43.99	53.98	-9.99
4824.00	Peak	H	123	303	-63.98	6.62	49.64	73.98	-24.34
12060.00	Avg	H	-	-	-81.69	18.90	44.21	53.98	-9.77
12060.00	Peak	H	-	-	-70.67	18.90	55.23	73.98	-18.75

Table 7-11. Radiated Measurements MIMO

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 88 of 95

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	123	305	-68.09	6.58	45.49	53.98	-8.49
4874.00	Peak	H	123	305	-63.35	6.58	50.23	73.98	-23.75
7311.00	Avg	H	-	-	-80.32	12.38	39.06	53.98	-14.92
7311.00	Peak	H	-	-	-68.95	12.38	50.43	73.98	-23.55
12185.00	Avg	H	-	-	-81.33	19.03	44.70	53.98	-9.28
12185.00	Peak	H	-	-	-70.80	19.03	55.23	73.98	-18.75

Table 7-12. Radiated Measurements MIMO

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	119	305	-68.55	7.00	45.45	53.98	-8.53
4924.00	Peak	H	119	305	-63.39	7.00	50.61	73.98	-23.37
7386.00	Avg	H	-	-	-80.85	12.89	39.04	53.98	-14.94
7386.00	Peak	H	-	-	-69.91	12.89	49.98	73.98	-24.00
12310.00	Avg	H	-	-	-81.85	19.57	44.72	53.98	-9.26
12310.00	Peak	H	-	-	-71.16	19.57	55.41	73.98	-18.57


Table 7-13. Radiated Measurements MIMO

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset		Page 89 of 95

MIMO Radiated Restricted Band Edge Measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

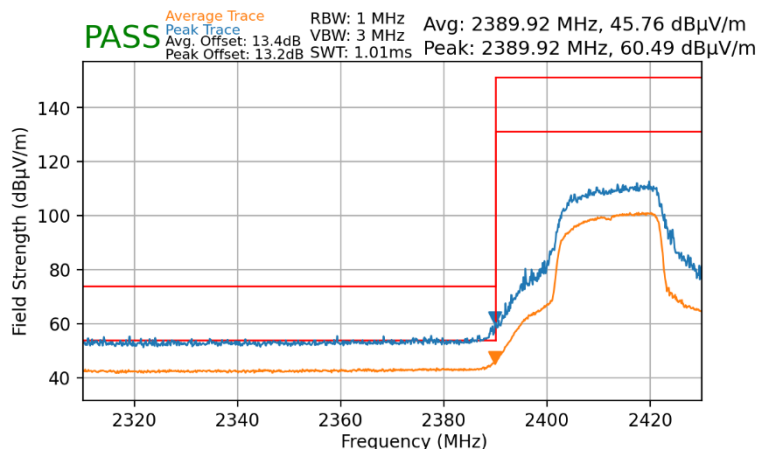

Plot 7-112. Radiated Restricted Lower Band Edge Measurement MIMO (Average & Peak)


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

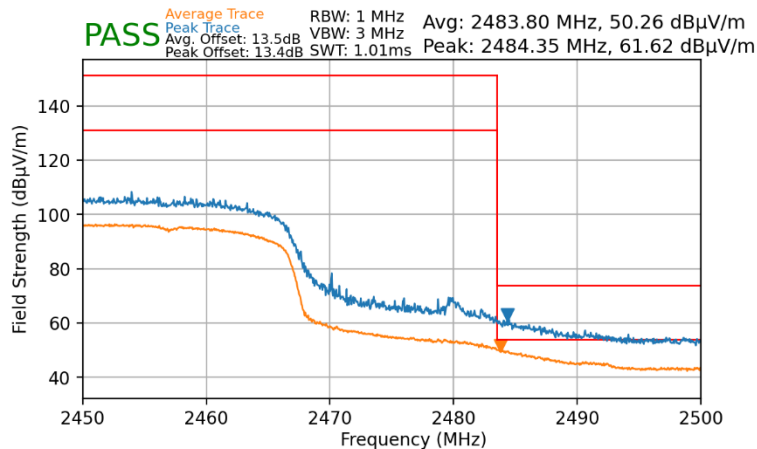

Plot 7-113. Radiated Restricted Upper Band Edge Measurement MIMO (Average & Peak)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 90 of 95

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

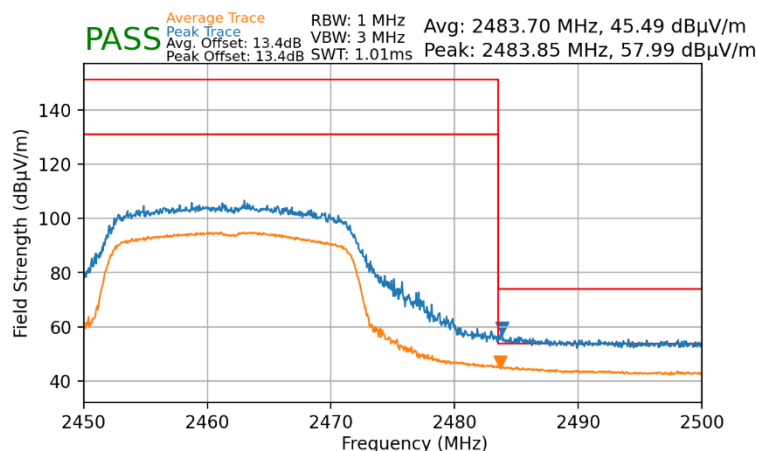

Plot 7-114. Radiated Restricted Upper Band Edge Measurement MIMO (Average & Peak)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 91 of 95

7.8 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-14. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMA576U IC: 649E-SMA576W		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset		Page 92 of 95

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


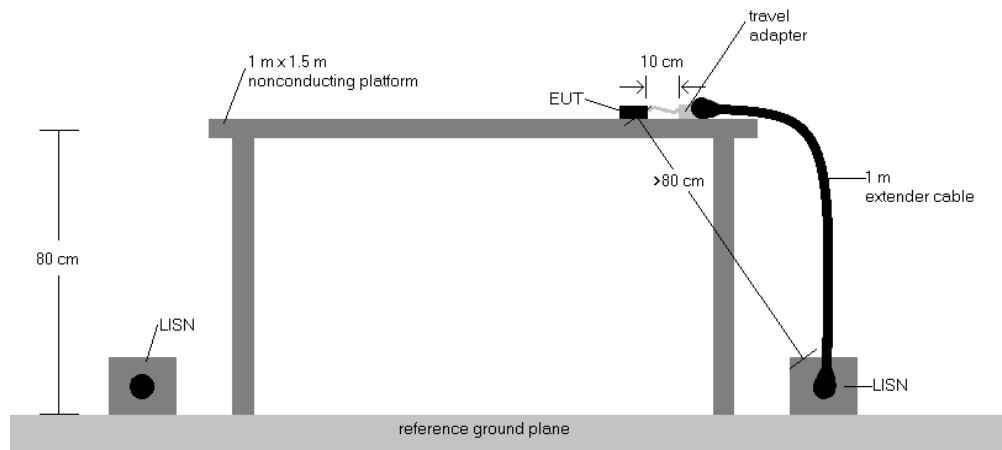


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 93 of 95

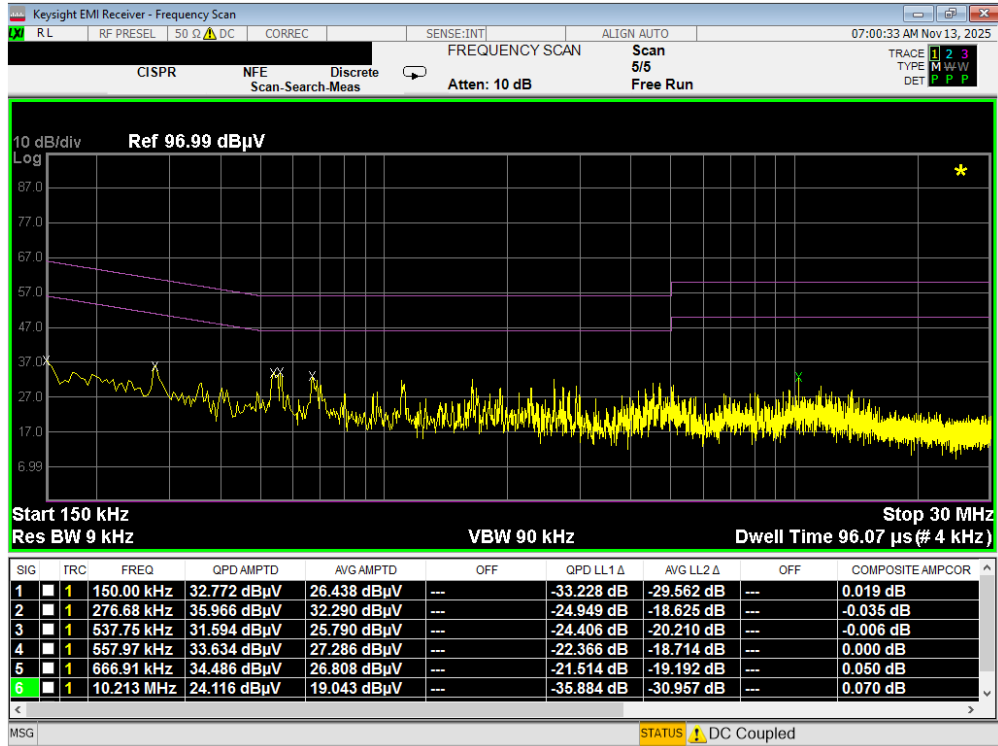

Plot 7-115. Line Conducted Plot with 802.11b (L1)

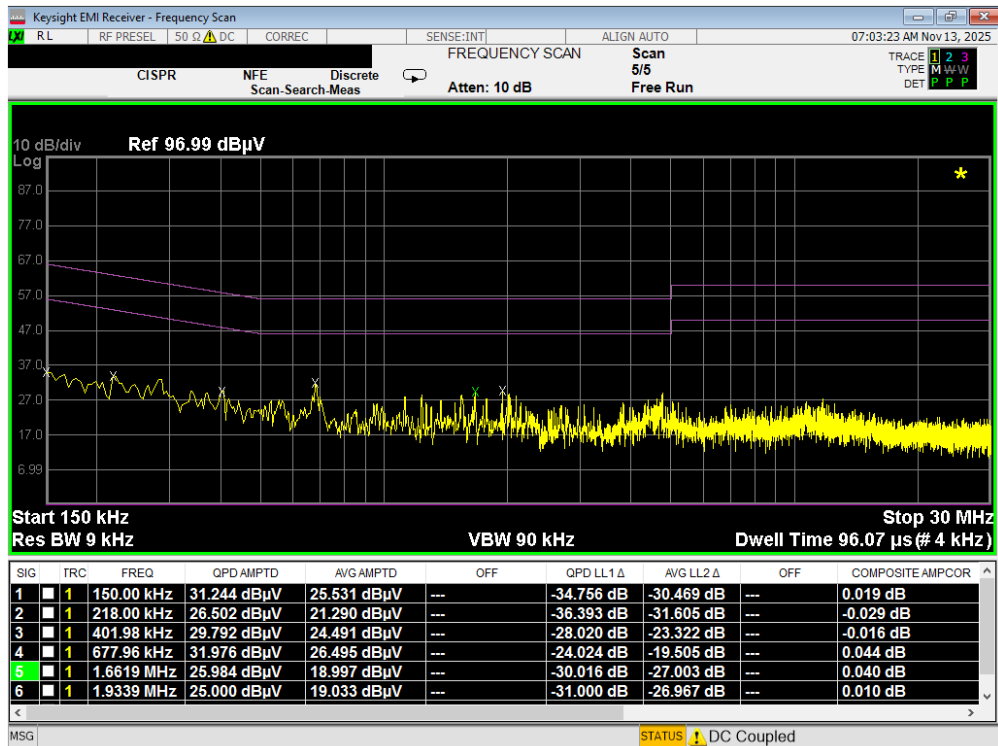

Plot 7-116. Line Conducted Plot with 802.11b (N)

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 94 of 95

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMA576U, IC: 649E-SMA576W** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISED Rules.

- END OF TEST REPORT -

FCC ID: A3LSMA576U IC: 649E-SMA576W	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2510280090-14-R2.A3L	Test Dates: 10/29/2025-12/18/2025	EUT Type: Portable Handset	Page 95 of 95