



**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n ANT+ and NFC

MODEL NUMBER: SM-A6050, SM-A605XC, SM-A6058

FCC ID: A3LSMA6050

REPORT NUMBER: 4788388893-S1V1

ISSUE DATE: 4/25/2018

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
**UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



TL-637

Revision History


Rev.	Date	Revisions	Revised By
V1	4/25/2018	Initial Issue	Eunji Choi

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	10
6.	Device Under Test (DUT) Information	11
6.1.	DUT Description	11
6.2.	Wireless Technologies.....	12
6.3.	Nominal and Maximum Output Power.....	13
6.4.	General LTE SAR Test and Reporting Considerations.....	15
6.5.	LTE Carrier Aggregation	16
6.6.	LTE (TDD) Considerations.....	17
6.7.	Power Reduction by Proximity Sensing	18
6.7.1.	Proximity Sensor Triggering Distance (KDB 616217 §6.2).....	18
6.7.2.	Proximity Sensor Coverage (KDB 616217 §6.3)	30
6.7.3.	Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4).....	30
6.7.4.	Resulting test positions for SAR measurements	31
7	RF Exposure Conditions (Test Configurations)	32
8	Dielectric Property Measurements & System Check	33
8.1	Dielectric Property Measurements.....	33
8.2	System Check.....	37
9	Conducted Output Power Measurements.....	40
9.1	GSM	40
9.2	W-CDMA	42
9.3	LTE.....	47
9.3.1	LTE Rel. 10 Carrier Aggregation	59
9.4	Wi-Fi 2.4 GHz (DTS Band).....	60
9.5	Wi-Fi 5GHz (U-NII Bands).....	61
9.6	Bluetooth	62
10.	Measured and Reported (Scaled) SAR Results.....	63

10.1	GSM 850	65
10.2	GSM1900	65
10.3	W-CDMA Band II	66
10.4	W-CDMA Band V	66
10.5	LTE Band 5 (10MHz Bandwidth).....	67
10.6	LTE Band 41 (20MHz Bandwidth).....	67
10.7	Wi-Fi (DTS Band)	68
10.8	Wi-Fi (U-NII Bands)	69
10.9	Bluetooth	70
11.	SAR Measurement Variability.....	71
12.	Simultaneous Transmission SAR Analysis.....	72
12.1	Sum of the SAR for GSM 850 & Wi-Fi & BT.....	73
12.2	Sum of the SAR for GSM 1900 & Wi-Fi & BT.....	73
12.3	Sum of the SAR for WCDMA Band II & Wi-Fi & BT.....	74
12.4	Sum of the SAR for WCDMA Band V & Wi-Fi & BT	74
12.5	Sum of the SAR for LTE Band 5 & Wi-Fi & BT.....	75
12.6	Sum of the SAR for LTE Band 41 & Wi-Fi & BT	75
Appendixes		76
	4788388893-S1V1 FCC Report SAR_App A_Photos & Ant. Locations.....	76
	4788388893-S1V1 FCC Report SAR_App B_Highest SAR Test Plots.....	76
	4788388893-S1V1 FCC Report SAR_App C_System Check Plots.....	76
	4788388893-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients	76
	4788388893-S1V1 FCC Report SAR_App E_Probe Cal. Certificates	76
	4788388893-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates.....	76

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.				
FCC ID	A3LSMA6050				
Model Number	SM-A6050, SM-A605XC, SM-A6058				
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013				
SAR Limits (W/Kg)					
Exposure Category	Peak spatial-average(1g of tissue)			Phablet (10g of tissue)	
General population / Uncontrolled exposure	1.6			4.0	
The Highest Reported SAR (W/kg)					
RF Exposure Conditions		Equipment Class			
		Licensed	DTS	U-NII	DSS(BT)
Head		0.30	0.27	1.10	0.15
Body-worn		1.03	0.14	0.56	N/A
Hotspot		0.92	0.27	0.99	
Phablet-10g		1.30	N/A	2.41	
Simultaneous TX	Head	1.39	0.57	1.39	0.45
	Body-worn	1.17	1.17	1.15	N/A
	Hotspot	1.40	1.19	1.40	
	Phablet-10g	3.71	N/A	3.71	
Date Tested	3/6/2018 to 4/9/2018				
Test Results	Pass				
UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.					
Approved & Released By:			Prepared By:		
					
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory			Eunji Choi Associate Test Engineer UL Korea, Ltd. Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

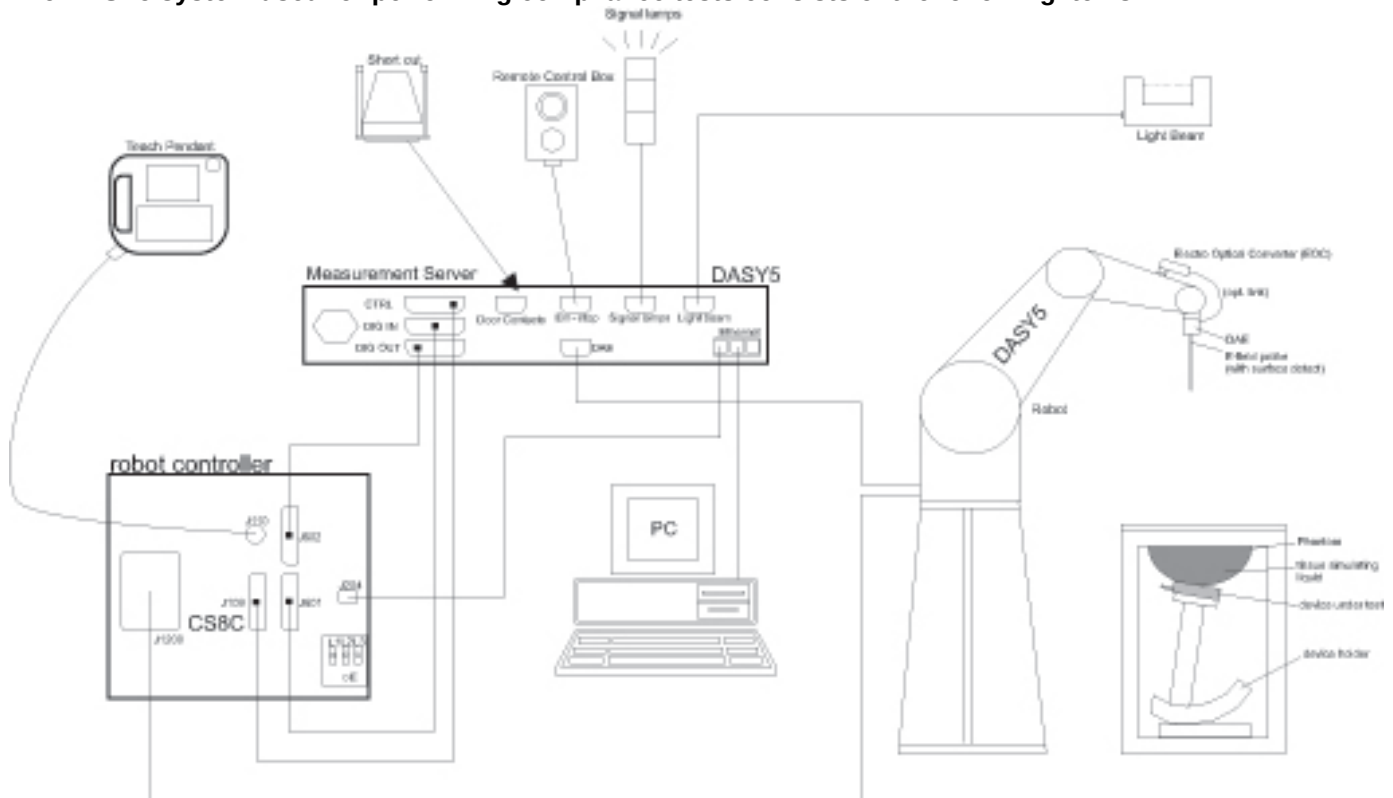

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-8-2018
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-2-2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-11-2018
Thermometer	Lutron	MHB-382SD	AH.91478	8-10-2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-7-2018
Power Sensor	Agilent	U2000A	MY54260010	8-8-2018
Power Sensor	Agilent	U2000A	MY54260007	8-8-2018
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2018
Directional Coupler	Agilent	772D	MY52180193	8-7-2018
Directional Coupler	Agilent	778D	MY52180432	8-7-2018
Low Pass Filter	MICROLAB	LA-15N	03943	8-7-2018
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2018
Low Pass Filter	MICROLAB	LA-60N	03942	8-7-2018
Attenuator	Agilent	8491B/003	MY39269292	8-7-2018
Attenuator	Agilent	8491B/010	MY39269315	8-7-2018
Attenuator	Agilent	8491B/020	MY39269298	8-7-2018
E-Field Probe (SAR1)	SPEAG	EX3DV4	7376	8-22-2018
E-Field Probe (SAR2)	SPEAG	EX3DV4	7330	1-22-2019
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	9-28-2018
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1468	8-22-2018
Data Acquisition Electronics (SAR2)	SPEAG	DAE3	479	10-23-2018
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	7-20-2018
System Validation Dipole	SPEAG	D835V2	4d194	7-19-2018
System Validation Dipole	SPEAG	D1900V2	5d190	9-20-2018
System Validation Dipole	SPEAG	D2450V2	939	9-19-2018
System Validation Dipole	SPEAG	D2600V2	1097	1-17-2019
System Validation Dipole	SPEAG	D5GHzV2	1209	2-15-2019
System Validation Dipole	SPEAG	D5GHzV2	1184	8-23-2018
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-10-2018
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	2-9-2019
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-16-2018

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	12-08-2018
Base Station Simulator	R & S	CMW500	150314	12-05-2018
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	8-7-2018

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 160.2 mm x 75.7 mm Overall Diagonal: 169.0 mm Display Diagonal: 154.0 mm		
Back Cover	☒ The Back Cover is not removable.		
Battery Options	☒ The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5 GHz_Ch.149 – Ch.165)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5 GHz_Ch.36 – Ch.48, Ch 149 – Ch165)		
Test Sample Information	No.	S/N	Notes
	1	R38K200N66F	Main conduction
	2	R38K200N9EL	SAR
	3	R38K200N9ZP	SAR
	4	R38K200N9FF	SAR
	5	R38K200N92D	SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Release.7) HSUPA (Release.9) DC-HSDPA (Release 8) HSPA+ (Release.9)		100%
LTE	FDD Band 5 TDD Band 41	QPSK 16QAM Rel. 10 Carrier Aggregation (1 Uplink and 2 Downlinks)		100%(FDD) 63.3%(TDD) ¹
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		99.7% (802.11b) 98.2% (802.11g) 98.1% (802.11n 20MHz BW)
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40)		98.2% (802.11a) 98.1% (802.11n 20MHz BW) 96.0% (802.11n 40MHz BW)
	Does this device support bands 5.60 ~ 5.65 GHz? ☐ Yes ☒ No			
	Does this device support Band gap channel(s)? ☐ Yes ☒ No			
Bluetooth	2.4 GHz	Version 4.2 LE		76.9% (DH5)

Notes:

1. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
2. The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.9% and was considered and used for SAR Testing.
3. Duty cycle for Wi-Fi is referenced from the DTS and UNII report.

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power Hotspot back-off (dBm)		Reduced. RF Output Power Proximity sensor back-off (dBm)	
			Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr
GSM850	Voice/GPRS	1	34.0	25.0	32.5	23.5	32.5	23.5
	GPRS	2	31.5	25.5	29.5	23.5	29.5	23.5
	GPRS	3	29.7	25.4	27.7	23.4	27.7	23.4
	GPRS	4	28.5	25.5	26.5	23.5	26.5	23.5
	EGPRS	1	27.5	18.5	25.5	16.5	25.5	16.5
	EGPRS	2	25.5	19.5	23.5	17.5	23.5	17.5
	EGPRS	3	23.5	19.2	22.0	17.7	22.0	17.7
	EGPRS	4	23.5	20.5	21.0	18.0	21.0	18.0
GSM1900	Voice/GPRS	1	30.5	21.5	28.0	19.0	28.0	19.0
	GPRS	2	28.0	22.0	25.0	19.0	25.0	19.0
	GPRS	3	26.2	21.9	23.2	18.9	23.2	18.9
	GPRS	4	25.0	22.0	22.0	19.0	22.0	19.0
	EGPRS	1	26.5	17.5	23.5	14.5	23.5	14.5
	EGPRS	2	24.5	18.5	21.5	15.5	21.5	15.5
	EGPRS	3	23.0	18.7	20.0	15.7	20.0	15.7
	EGPRS	4	21.5	18.5	18.5	15.5	18.5	15.5

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
W-CDMA Band II	R99	24.0	20.0	20.0
	HSDPA	23.5	19.5	19.5
	HSUPA	23.5	19.5	19.5
	DC-HSDPA	23.0	19.0	19.0
W-CDMA Band V	R99	24.5	22.5	22.5
	HSDPA	24.0	22.0	22.0
	HSUPA	24.0	22.0	22.0
	DC-HSDPA	24.0	22.0	22.0

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
LTE Band 5	QPSK	25.0	23.0	23.0
LTE Band 41	QPSK	24.5	23.5	23.5

Notes:

1. The device utilizes power reduction under some portable hotspot conditions for SAR compliance. There is power reduction for WWAN bands. The reduced powers were confirmed via conducted power measurements the RF port. Detailed description of the hotspot power reduction mechanism is included in the operational description.
2. WWAN bands support to proximity sensor back-off function. It is operating during extremity (hand-held) use conditions. And this function is applied to phablet 10-g SAR exposure condition. Other Head and Body exposure conditions are performed SAR test at full power. The proximity sensor details explain in SAR report according to Section 6 in KDB 616217.
3. Both back-off functions are not operating at the same time.
4. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

RF Air interface	Mode	Max . RF Output Pow er (dBm)	Reduced. RF Output Pow er IR Proximity sensor back-off (dBm)
WiFi 2.4 GHz (Ch.1 - Ch.11)	802.11b	19.5	13.5
	802.11g	13.5	13.5
	802.11n HT20	13.5	13.5
WiFi 2.4 GHz (Ch.12)	802.11b	13.5	
	802.11g	10.5	
	802.11n HT20	10.5	
WiFi 2.4 GHz (Ch.13)	802.11b	13.5	
	802.11g	5.5	
	802.11n HT20	5.5	
WiFi 5 GHz	802.11a	18.5	11.5
	802.11n HT20	18.5	11.5
	802.11n HT40	15.5	11.5
Bluetooth		10.5	
Bluetooth LE		1.5	

Note(s):

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																																																				
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 – 849 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																																														
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																																														
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																																														
	Band 41	Frequency range: 2555 – 2655 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low	40340/ 2565	40315/ 2562.5	40290/ 2560	40265/ 2557.5																																																																
	Mid	40740/ 2605	40740/ 2605	40740/ 2605	40740/ 2605																																																																
	High	41140/ 2645	41165/ 2647.5	41190/ 2650	41215/ 2652.5																																																																
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																				
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table> <tr> <th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr> <tr> <th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr> <tr> <td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr> <tr> <td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr> </table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing							Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
Power reduction	Yes																																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

Notes:

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.5. LTE Carrier Aggregation

Combination	CA configuration	BCS Configuration	Reverse Y/N	Bandwidth (MHz)												Max Aggregated BW (MHz)			
				Carrier 1						Carrier 2									
				20	15	10	5	3	1.4	20	15	10	5	3	1.4				
Intra-Band contiguous	41C	(0)	Yes			√				√						40			
					√					√	√								
		(1)		√					√	√	√								
					√		√			√	√								
		(2)		√		√			√	√	√	√							
					√					√	√	√							
		(3)		√		√			√	√	√	√							
					√					√									
		Intra-Band non-contiguous		41A-41A	(0)	Yes	√	√	√				√	√	√				40
							√	√	√	√			√	√	√		√		40

Note(s):

For supported channels, please refer to §6.4

6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7


6.7. Power Reduction by Proximity Sensing

6.7.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Front, Rear and Edge 3 of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

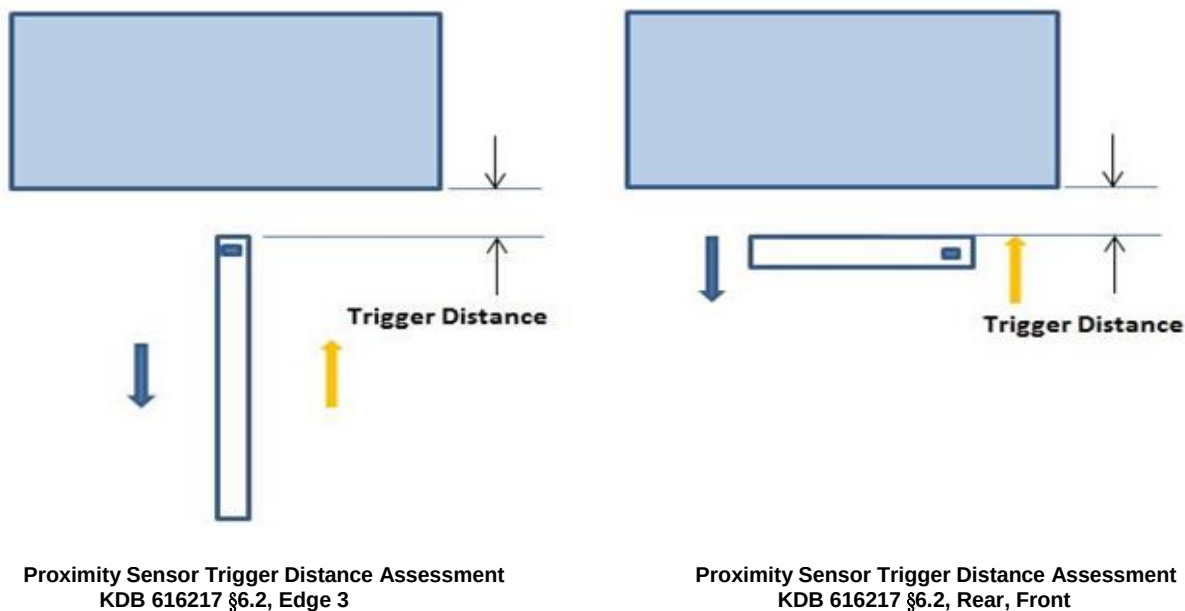

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point


Summary of Trigger Distances

Tissue simulating liquid	Trigger distance - Front		Trigger distance - Rear		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
850 Body	7 mm	7 mm	14 mm	14 mm	14 mm	14 mm
1900 Body	7 mm	7 mm	14 mm	14 mm	14 mm	14 mm
2600 Body	7 mm	7 mm	14 mm	14 mm	14 mm	14 mm
2450 Head	70 mm	70 mm	N/A		N/A	
5G Head	70 mm	70 mm	N/A		N/A	

Proximity Sensor Triggering Distance Measurement Results**GSM 850**


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
GSM850 Voice 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.5	33.5
GSM850 GPRS 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	29.1	29.1	29.1	29.1	29.1	31.1	31.2	31.2	31.1	31.2
GSM850 GPRS 3 Slots	27.3	27.3	27.2	27.2	27.3	29.3	29.4	29.4	29.3	29.3
GSM850 GPRS 4 Slots	26.1	26.0	26.1	26.0	26.1	28.1	28.1	28.1	28.0	28.0
GSM850 EGPRS 1 Slot	25.1	25.1	25.2	25.1	25.1	27.2	27.2	27.2	27.2	27.1
GSM850 EGPRS 2 Slots	23.1	23.1	23.0	23.0	23.1	25.1	25.1	25.1	25.1	25.0
GSM850 EGPRS 3 Slots	21.5	21.6	21.5	21.6	21.5	23.2	23.2	23.2	23.1	23.2
GSM850 EGPRS 4 Slots	20.5	20.5	20.5	20.5	20.5	23.1	23.1	23.1	23.2	23.1

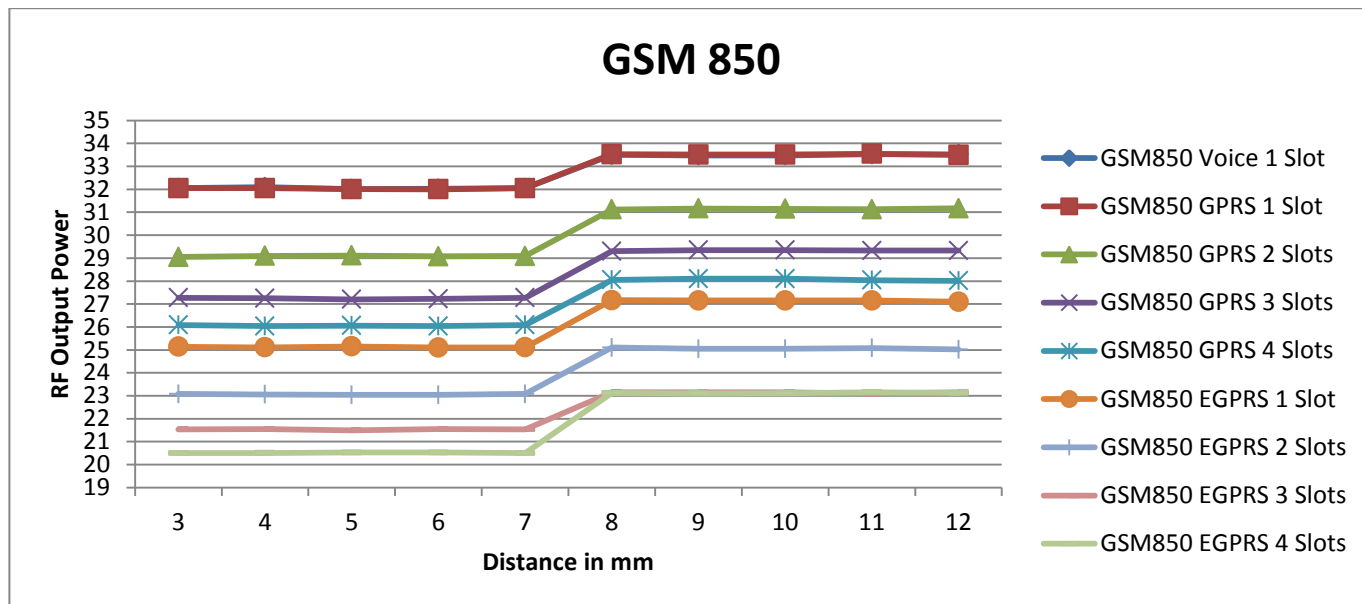


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
GSM850 Voice 1 Slot	32.1	32.1	32.0	32.1	32.0	33.5	33.5	33.5	33.5	33.5
GSM850 GPRS 1 Slot	32.1	32.1	32.0	32.1	32.0	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	29.1	29.1	29.1	29.1	29.1	31.2	31.2	31.1	31.1	31.1
GSM850 GPRS 3 Slots	27.3	27.2	27.2	27.3	27.2	29.4	29.3	29.4	29.3	29.3
GSM850 GPRS 4 Slots	26.0	26.1	26.0	26.1	26.0	28.1	28.0	28.1	28.0	28.1
GSM850 EGPRS 1 Slot	25.1	25.1	25.1	25.1	25.1	27.2	27.1	27.2	27.1	27.2
GSM850 EGPRS 2 Slots	23.1	23.0	23.0	23.1	23.0	25.1	25.0	25.1	25.1	25.1
GSM850 EGPRS 3 Slots	21.6	21.5	21.6	21.5	21.6	23.2	23.1	23.1	23.1	23.2
GSM850 EGPRS 4 Slots	20.5	20.5	20.5	20.5	20.5	23.1	23.2	23.1	23.2	23.1

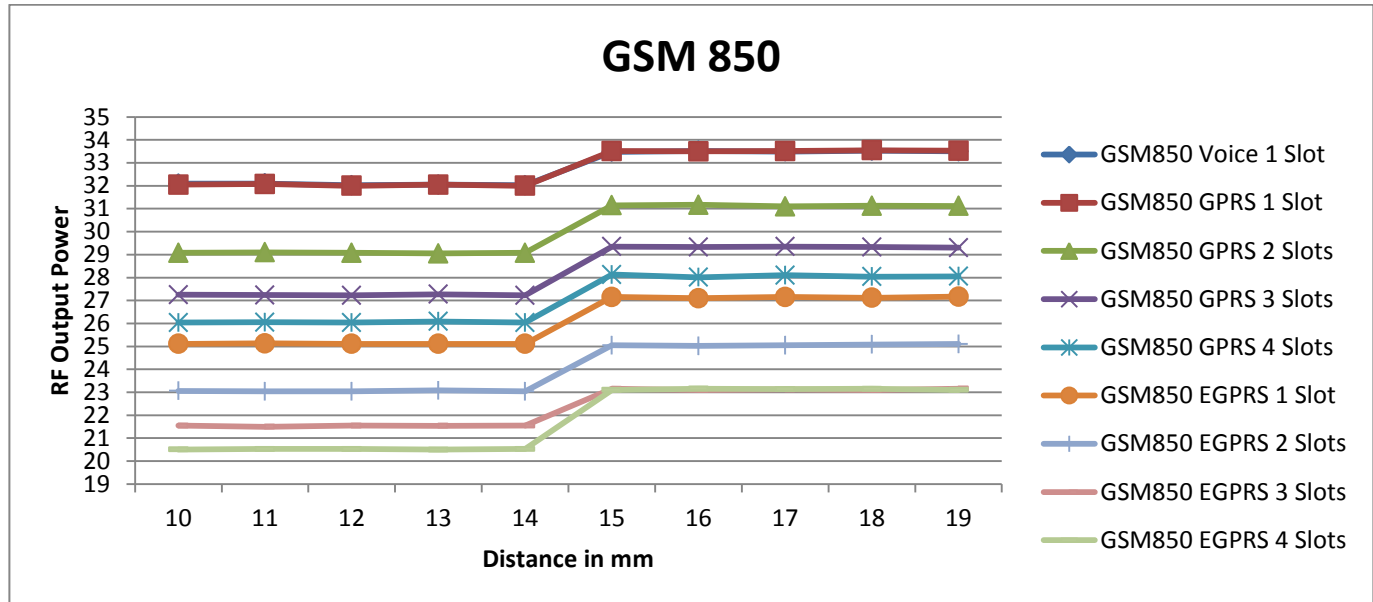

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
GSM850 Voice 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.5	33.5
GSM850 GPRS 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	29.1	29.1	29.1	29.1	29.1	31.1	31.1	31.2	31.1	31.2
GSM850 GPRS 3 Slots	27.3	27.3	27.2	27.2	27.3	29.3	29.4	29.4	29.3	29.3
GSM850 GPRS 4 Slots	26.1	26.0	26.1	26.0	26.1	28.1	28.1	28.1	28.0	28.0
GSM850 EGPRS 1 Slot	25.1	25.1	25.2	25.1	25.1	27.2	27.1	27.1	27.2	27.1
GSM850 EGPRS 2 Slots	23.1	23.1	23.0	23.0	23.1	25.1	25.1	25.1	25.1	25.0
GSM850 EGPRS 3 Slots	21.5	21.5	21.5	21.6	21.5	23.2	23.2	23.1	23.1	23.2
GSM850 EGPRS 4 Slots	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5

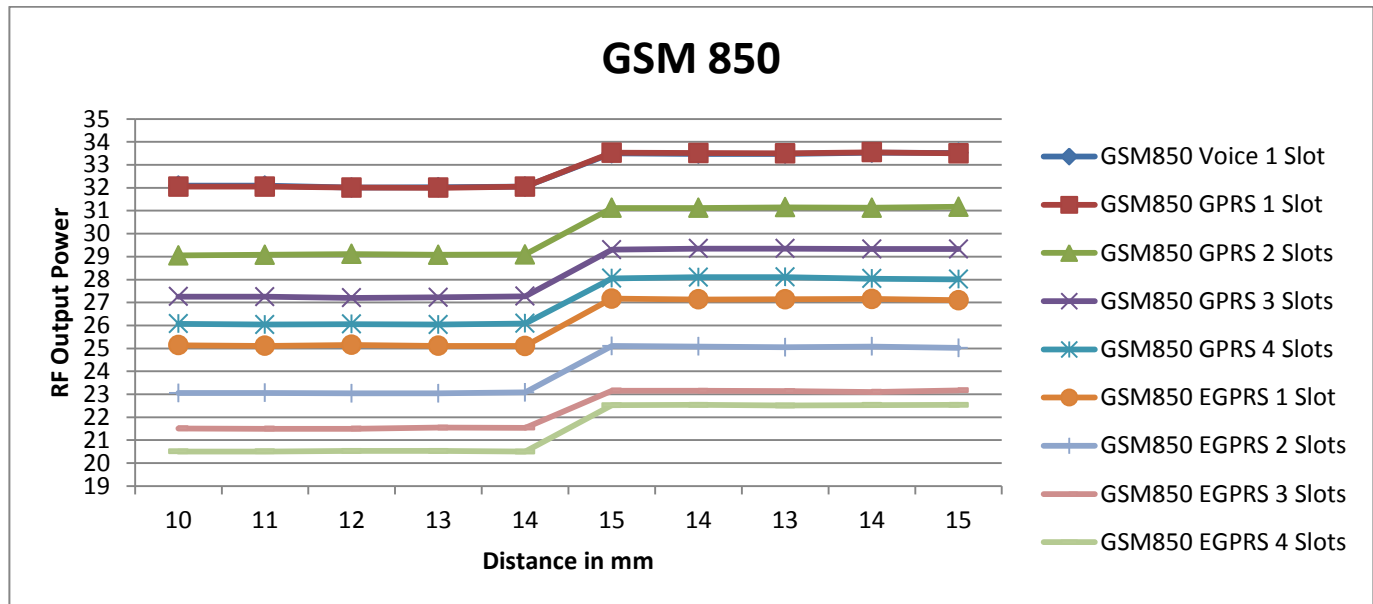

GSM 1900


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
GSM1900 Voice 1 Slot	27.5	27.1	27.2	27.6	27.5	30.2	30.3	30.2	30.2	30.2
GSM1900 GPRS 1 Slot	27.5	27.5	27.5	27.5	27.5	30.1	30.0	30.1	30.1	30.0
GSM1900 GPRS 2 Slots	24.5	24.5	24.5	24.5	24.5	27.6	27.5	27.5	27.6	27.6
GSM1900 GPRS 3 Slots	22.7	22.7	22.7	22.7	22.7	25.8	25.7	25.7	25.7	25.7
GSM1900 GPRS 4 Slots	21.5	21.5	21.5	21.6	21.5	24.5	24.6	24.5	24.5	24.5
GSM1900 EGPRS 1 Slot	23.1	23.1	23.1	23.2	23.1	26.1	26.0	26.0	26.1	26.1
GSM1900 EGPRS 2 Slots	21.1	21.1	21.0	21.1	21.1	24.1	24.0	24.0	24.0	24.1
GSM1900 EGPRS 3 Slots	19.5	19.5	19.5	19.6	19.5	22.6	22.5	22.5	22.6	22.6
GSM1900 EGPRS 4 Slots	18.0	18.1	18.0	18.1	18.0	21.2	21.1	21.1	21.1	21.2

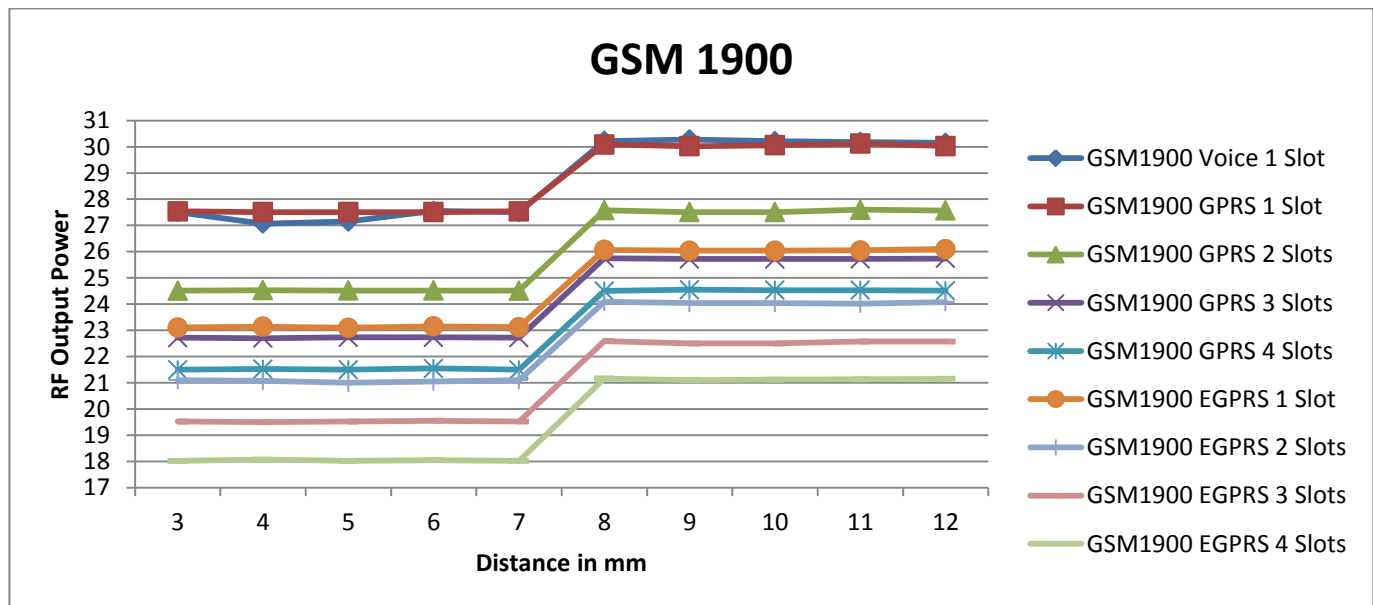


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
GSM1900 Voice 1 Slot	27.1	27.1	27.6	27.5	27.6	30.2	30.2	30.3	30.2	30.2
GSM1900 GPRS 1 Slot	27.5	27.5	27.5	27.5	27.5	30.0	30.0	30.1	30.1	30.1
GSM1900 GPRS 2 Slots	24.5	24.5	24.5	24.5	24.5	27.5	27.6	27.5	27.6	27.6
GSM1900 GPRS 3 Slots	22.7	22.7	22.7	22.7	22.7	25.7	25.7	25.7	25.7	25.8
GSM1900 GPRS 4 Slots	21.5	21.5	21.6	21.5	21.6	24.6	24.5	24.5	24.5	24.5
GSM1900 EGPRS 1 Slot	23.1	23.1	23.2	23.1	23.2	26.0	26.1	26.1	26.1	26.1
GSM1900 EGPRS 2 Slots	21.1	21.1	21.1	21.1	21.1	24.0	24.1	24.0	24.0	24.1
GSM1900 EGPRS 3 Slots	19.5	19.5	19.6	19.5	19.6	22.5	22.6	22.5	22.6	22.6
GSM1900 EGPRS 4 Slots	18.1	18.1	18.1	18.0	18.1	21.1	21.2	21.2	21.1	21.2

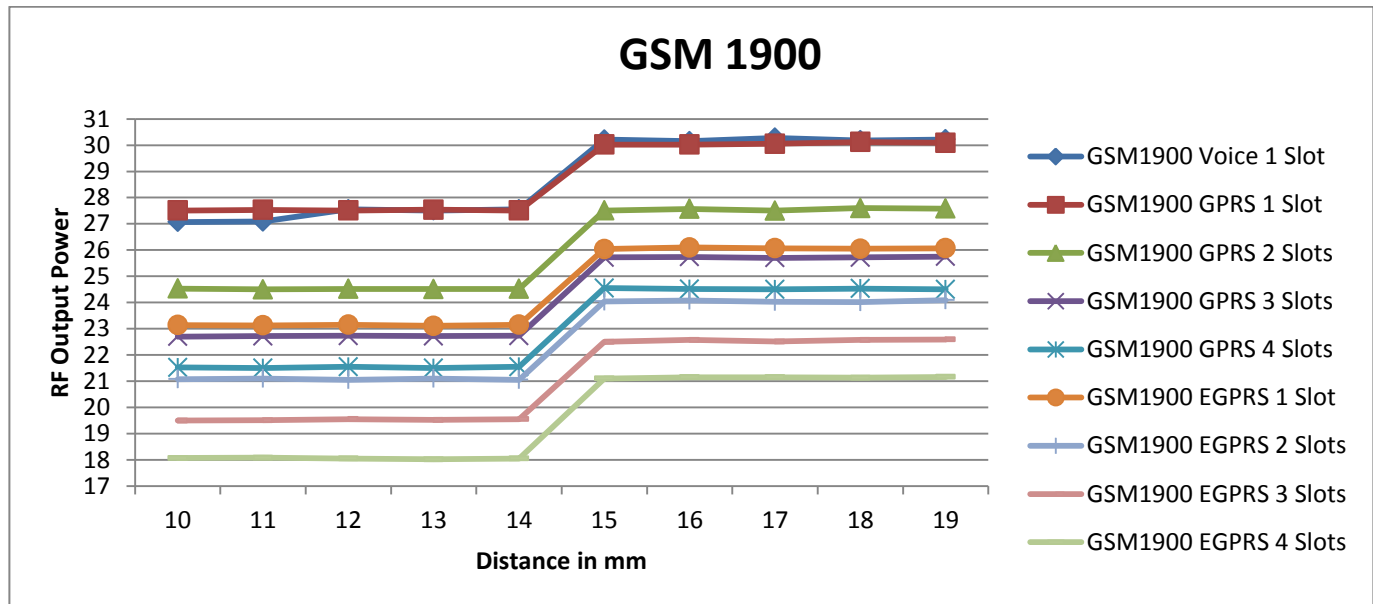

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
GSM1900 Voice 1 Slot	27.5	27.1	27.2	27.6	27.5	30.2	30.3	30.2	30.2	30.2
GSM1900 GPRS 1 Slot	27.6	27.5	27.5	27.5	27.5	30.1	30.1	30.0	30.1	30.0
GSM1900 GPRS 2 Slots	24.5	24.5	24.5	24.5	24.5	27.6	27.5	27.5	27.6	27.6
GSM1900 GPRS 3 Slots	22.8	22.7	22.7	22.7	22.7	25.8	25.7	25.7	25.7	25.7
GSM1900 GPRS 4 Slots	21.5	21.5	21.5	21.6	21.5	24.5	24.6	24.5	24.5	24.5
GSM1900 EGPRS 1 Slot	23.1	23.1	23.1	23.2	23.1	26.1	26.1	26.0	26.1	26.1
GSM1900 EGPRS 2 Slots	21.1	21.1	21.0	21.1	21.1	24.1	24.0	24.1	24.0	24.1
GSM1900 EGPRS 3 Slots	19.5	19.5	19.5	19.6	19.5	22.6	22.5	22.5	22.6	22.6
GSM1900 EGPRS 4 Slots	18.1	18.1	18.0	18.1	18.0	21.2	21.1	21.1	21.1	21.2

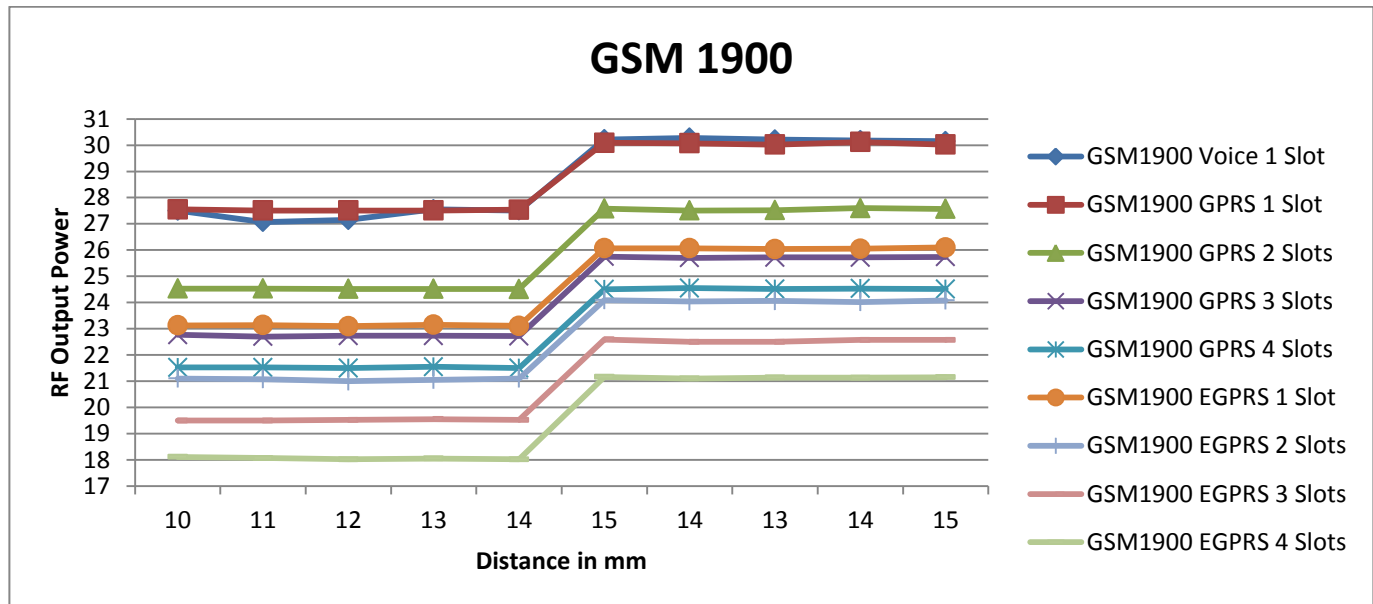

WCDMA Band V/II


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
WCDMA Band V	22.2	22.1	22.2	22.1	22.2	24.1	24.2	24.0	24.0	24.1
WCDMA Band II	19.5	19.5	19.6	19.5	19.5	23.5	23.5	23.5	23.6	23.6

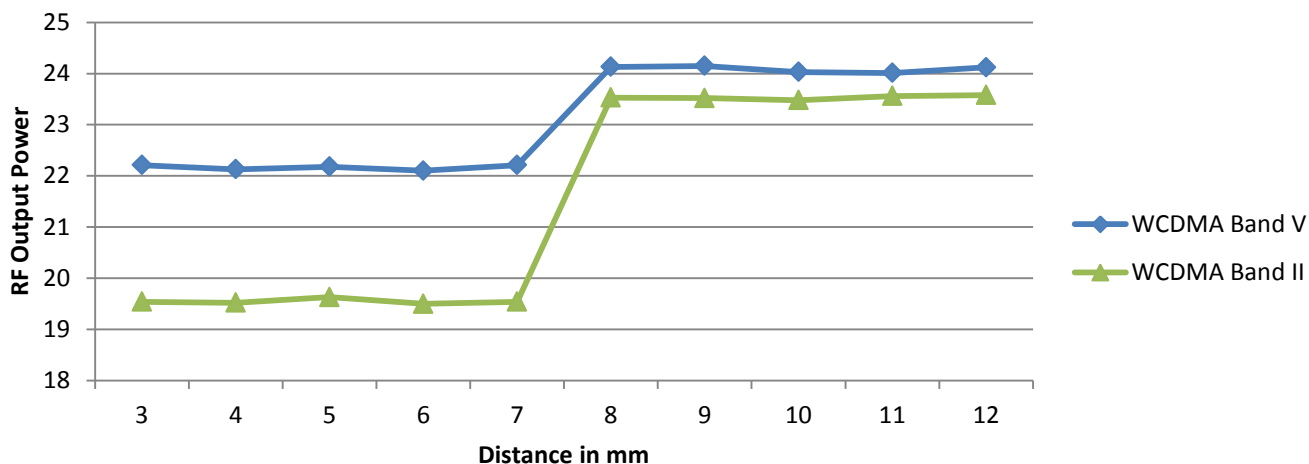WCDMA Bands V / II


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
WCDMA Band V	22.1	22.1	22.1	22.2	22.1	24.0	24.1	24.2	24.0	24.1
WCDMA Band II	19.5	19.6	19.5	19.5	19.5	23.5	23.6	23.5	23.6	23.5

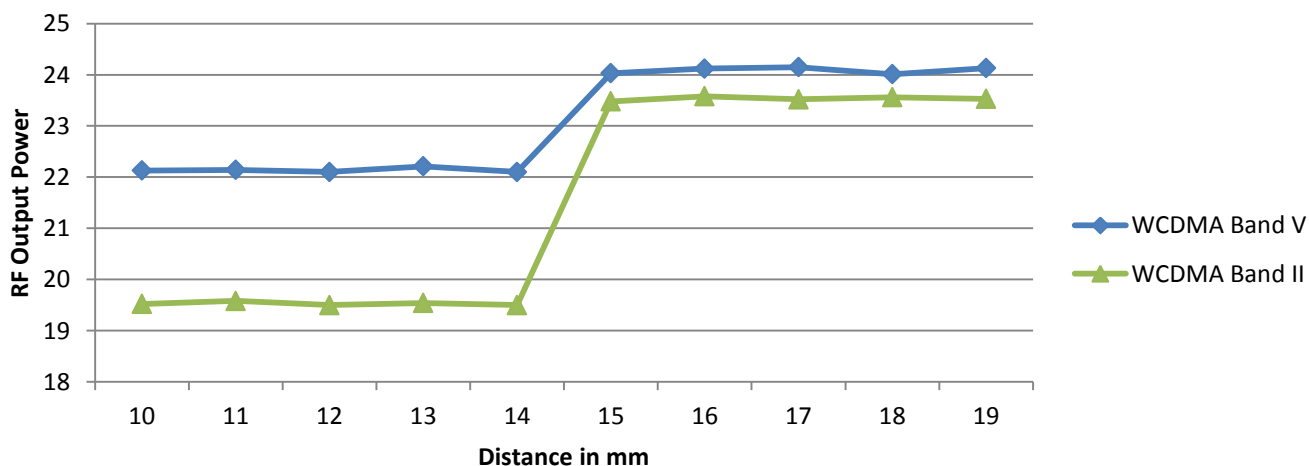WCDMA Bands V / II

Edge 3, DUT Moving Toward (Trigger) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
WCDMA Band V	22.2	22.1	22.2	22.1	22.2	24.1	24.2	24.0	24.0	24.1
WCDMA Band II	19.5	19.5	19.6	19.5	19.5	23.5	23.5	23.5	23.6	23.6

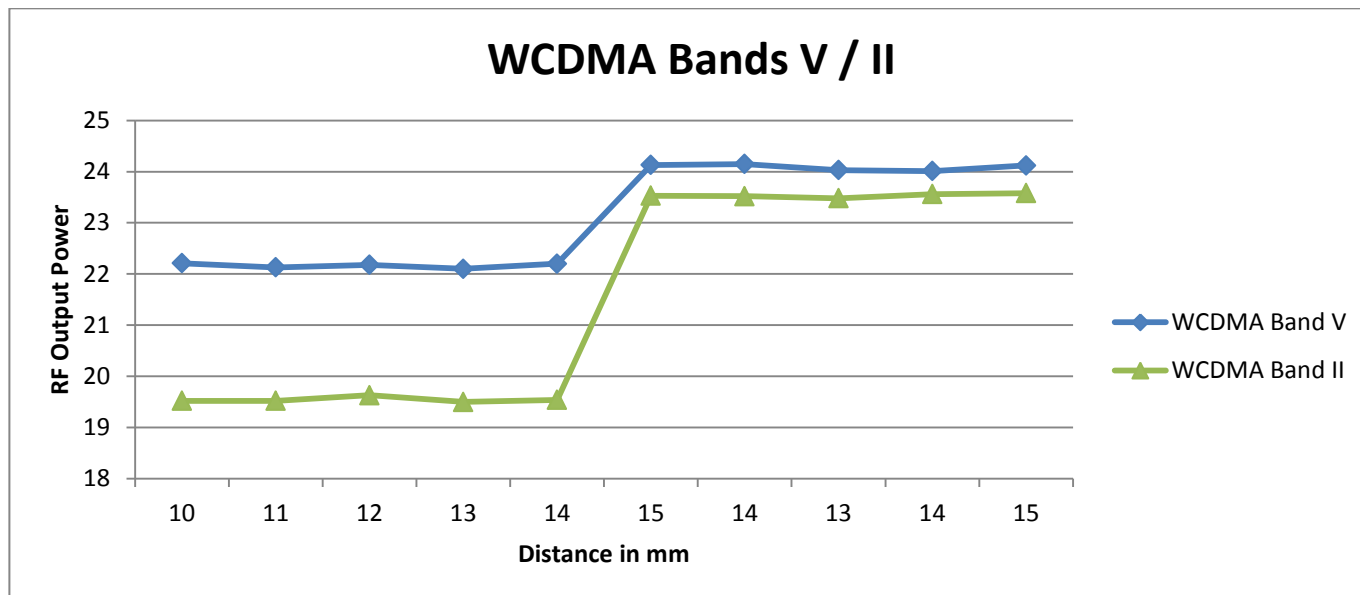

LTE Band 5/41


Front, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
LTE Band 5	22.6	22.6	22.6	22.5	22.6	24.5	24.6	24.6	24.6	24.5
LTE Band 41	22.9	22.9	22.9	22.8	22.8	23.9	23.9	23.9	23.9	23.9

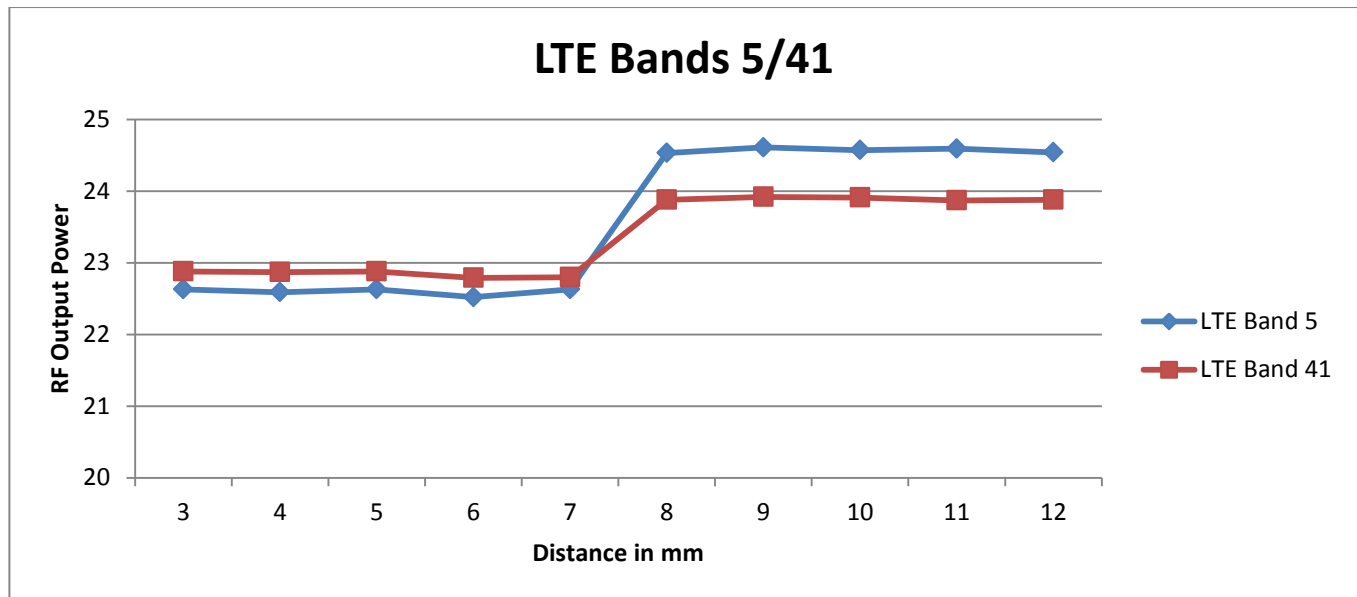


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
LTE Band 5	22.6	22.6	22.5	22.6	22.5	24.6	24.5	24.6	24.6	24.5
LTE Band 41	22.8	22.9	22.9	22.8	22.8	23.9	23.9	23.9	23.9	23.9

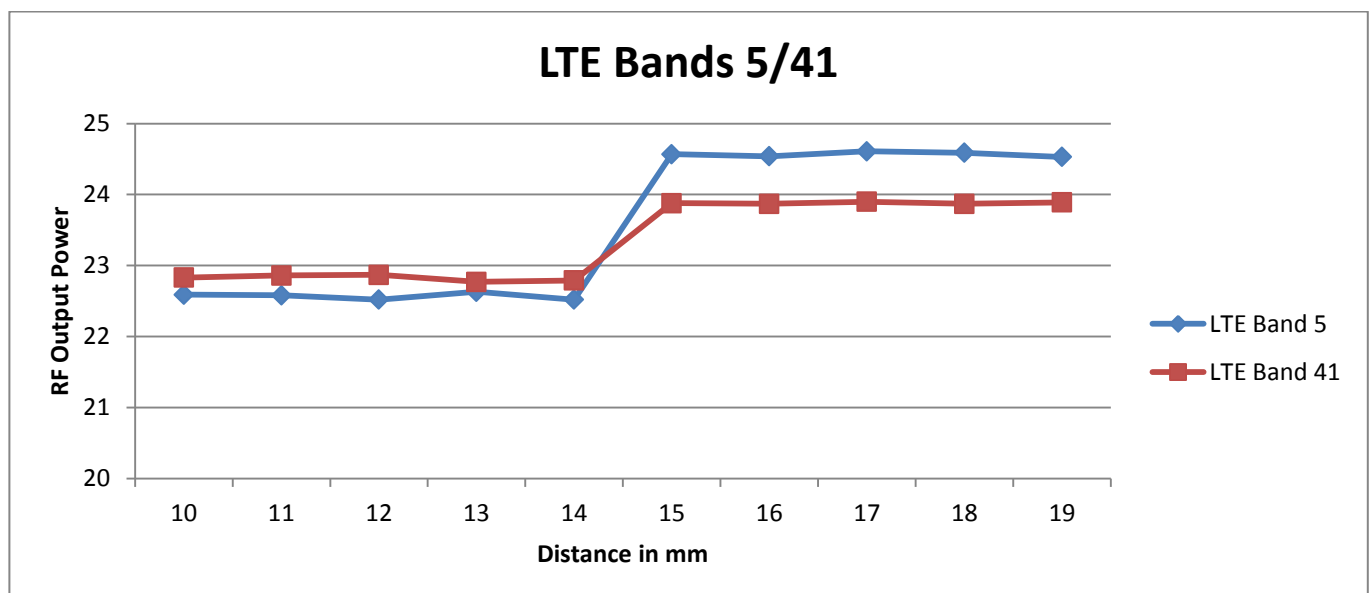

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
LTE Band 5	22.6	22.6	22.6	22.5	22.6	24.5	24.6	24.6	24.6	24.5
LTE Band 41	22.8	22.9	22.9	22.8	22.9	23.9	23.9	23.9	23.9	23.9

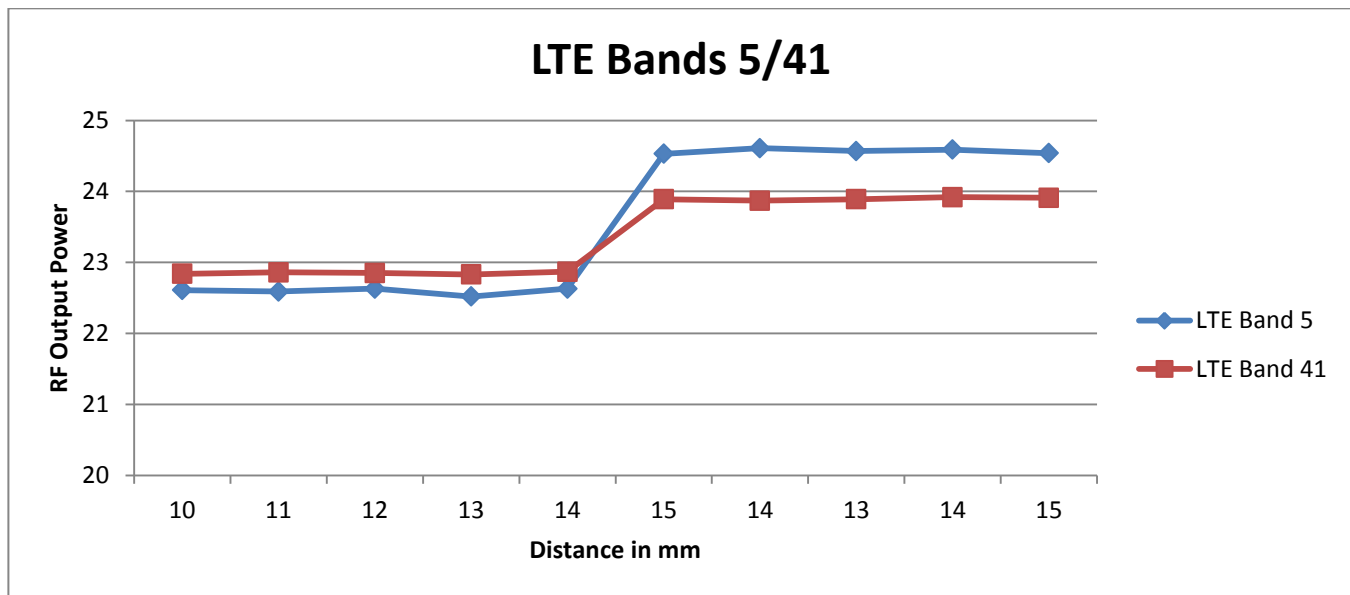

WLAN

Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance	66	67	68	69	70	71	72	73	74	75
2.4 GHz 802.11b	13.1	13.1	13.1	13.1	13.1	19.2	19.2	19.1	19.1	19.1
2.4 GHz 802.11g	13.1	13.1	13.1	13.1	13.1	13.1	13.2	13.1	13.2	13.2
2.4 GHz 802.11n	13.1	13.1	13.1	13.1	13.1	13.2	13.2	13.2	13.1	13.2
5 GHz 802.11a	11.2	11.1	11.2	11.1	11.1	18.1	18.1	18.0	18.0	18.1
5 GHz 802.11n HT20	11.1	11.2	11.1	11.1	11.1	18.1	18.1	18.1	18.2	18.1
5 GHz 802.11n HT40	11.1	11.1	11.1	11.1	11.1	15.1	15.2	15.2	15.1	15.2

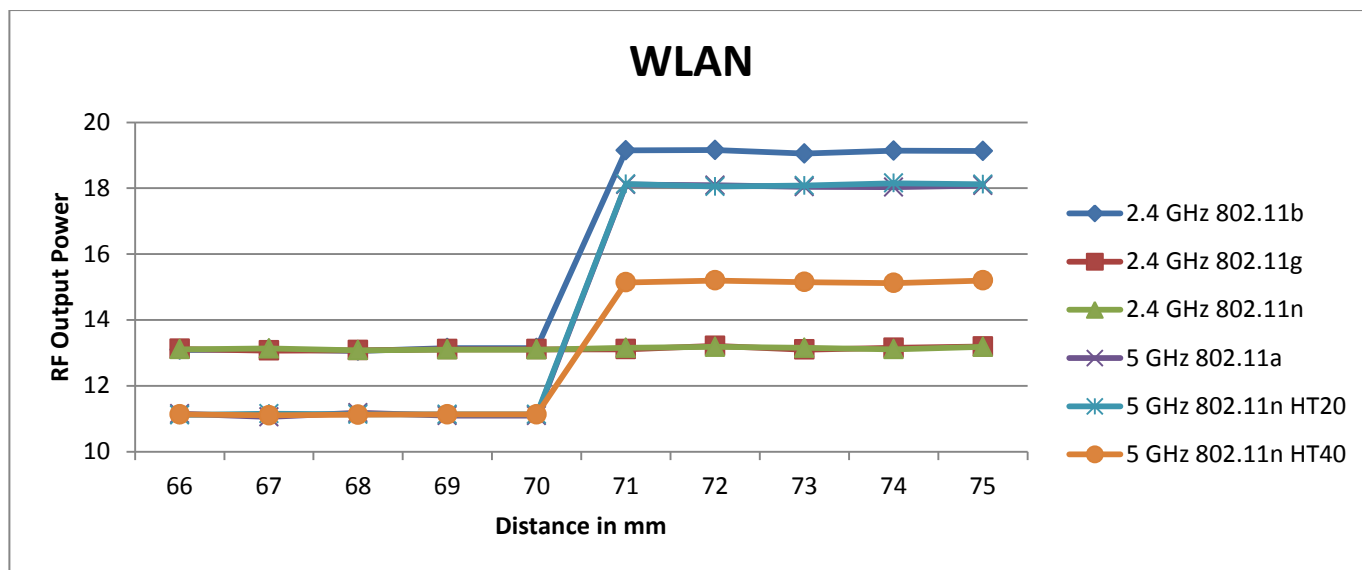


6.7.2 Proximity Sensor Coverage (KDB 616217 §6.3)

Except WLAN, As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

6.7.3 Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 3 parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 3 for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

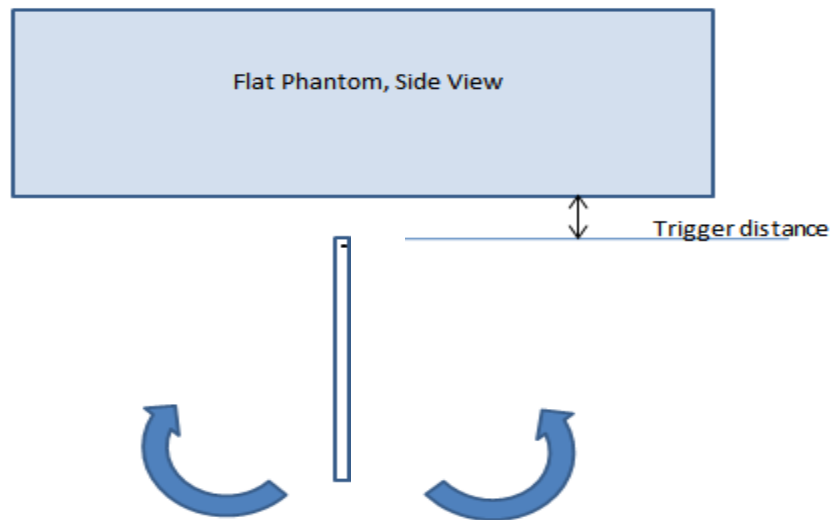

Proximity sensor tilt angle assessment (Edge 3) KDB 616217 §6.4

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Edge 3)

Band (MHz)	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over $\pm 45^\circ$	Power reduction status										
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
850	14 mm	14 mm	On	On	On	On	On	On	On	On	On	On	On
1900	14 mm	14 mm	On	On	On	On	On	On	On	On	On	On	On
2600	14 mm	14 mm	On	On	On	On	On	On	On	On	On	On	On

6.7.4 Resulting test positions for SAR measurements

Wireless technologies	DUT Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
WWAN	Front	7 mm	N/A	N/A	6 mm
	Rear	14 mm	N/A	N/A	13 mm
	Edge 3	14 mm	N/A	14 mm	13 mm
WLAN	Front	70 mm	N/A	70 mm	69 mm

Notes:

1. Worst case distance for WLAN SAR is not considered for body exposure condition. Because Power reduction is applied only voice or VoIP held to ear scenarios.
2. For WLAN, This proximity sensor is only operating in Head exposure condition. So tilt (15 degree) position of Head exposure was additional verified.

7 RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
	Phablet-10g	0 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Phablet-10g	0 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Phablet SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g Phablet SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Phablet SAR is required for all surfaces and Edges within 25mm of the antenna.

8 Dielectric Property Measurements & System Check

8.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
3-6-2018	Body 1900	e'	53.9900	Relative Permittivity (ϵ_r):	53.99	53.30	1.29	5
		e''	14.9300	Conductivity (σ):	1.58	1.52	3.77	5
	Body 1850	e'	54.1600	Relative Permittivity (ϵ_r):	54.16	53.30	1.61	5
		e''	14.8800	Conductivity (σ):	1.53	1.52	0.70	5
	Body 1910	e'	53.9500	Relative Permittivity (ϵ_r):	53.95	53.30	1.22	5
		e''	14.9400	Conductivity (σ):	1.59	1.52	4.39	5
3-21-2018	Body 1900	e'	51.8300	Relative Permittivity (ϵ_r):	51.83	53.30	-2.76	5
		e''	14.9700	Conductivity (σ):	1.58	1.52	4.05	5
	Body 1850	e'	51.9800	Relative Permittivity (ϵ_r):	51.98	53.30	-2.48	5
		e''	14.9100	Conductivity (σ):	1.53	1.52	0.90	5
	Body 1910	e'	51.8000	Relative Permittivity (ϵ_r):	51.80	53.30	-2.81	5
		e''	14.9900	Conductivity (σ):	1.59	1.52	4.73	5
3-28-2018	Head 5180	e'	37.1800	Relative Permittivity (ϵ_r):	37.18	36.01	3.24	5
		e''	15.6900	Conductivity (σ):	4.52	4.63	-2.41	5
	Head 5300	e'	37.1500	Relative Permittivity (ϵ_r):	37.15	35.88	3.55	5
		e''	15.7200	Conductivity (σ):	4.63	4.75	-2.54	5
	Head 5600	e'	36.5800	Relative Permittivity (ϵ_r):	36.58	35.53	2.94	5
		e''	15.9200	Conductivity (σ):	4.96	5.06	-2.04	5
	Head 5800	e'	36.3000	Relative Permittivity (ϵ_r):	36.30	35.30	2.83	5
		e''	16.0800	Conductivity (σ):	5.19	5.27	-1.60	5
	Head 5825	e'	36.2600	Relative Permittivity (ϵ_r):	36.26	35.30	2.72	5
		e''	16.0700	Conductivity (σ):	5.20	5.27	-1.24	5
4-3-2018	Head 5180	e'	37.1400	Relative Permittivity (ϵ_r):	37.14	36.01	3.13	5
		e''	15.5300	Conductivity (σ):	4.47	4.63	-3.40	5
	Head 5300	e'	37.0200	Relative Permittivity (ϵ_r):	37.02	35.88	3.19	5
		e''	15.6100	Conductivity (σ):	4.60	4.75	-3.22	5
	Head 5600	e'	36.6200	Relative Permittivity (ϵ_r):	36.62	35.53	3.06	5
		e''	15.7300	Conductivity (σ):	4.90	5.06	-3.21	5
	Head 5800	e'	36.3700	Relative Permittivity (ϵ_r):	36.37	35.30	3.03	5
		e''	15.8500	Conductivity (σ):	5.11	5.27	-3.01	5
	Head 5825	e'	36.3200	Relative Permittivity (ϵ_r):	36.32	35.30	2.89	5
		e''	15.8500	Conductivity (σ):	5.13	5.27	-2.59	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
3-15-2018	Head 835	e'	42.9300	Relative Permittivity (ϵ_r):	42.93	41.50	3.45	5
		e''	19.3500	Conductivity (σ):	0.90	0.90	-0.18	5
	Head 820	e'	43.0700	Relative Permittivity (ϵ_r):	43.07	41.60	3.53	5
		e''	19.4100	Conductivity (σ):	0.88	0.90	-1.50	5
	Head 850	e'	42.8000	Relative Permittivity (ϵ_r):	42.80	41.50	3.13	5
		e''	19.3300	Conductivity (σ):	0.91	0.92	-0.15	5
3-15-2018	Body 835	e'	55.0800	Relative Permittivity (ϵ_r):	55.08	55.20	-0.22	5
		e''	21.0600	Conductivity (σ):	0.98	0.97	0.80	5
	Body 820	e'	55.1900	Relative Permittivity (ϵ_r):	55.19	55.28	-0.16	5
		e''	21.1400	Conductivity (σ):	0.96	0.97	-0.47	5
	Body 850	e'	55.0000	Relative Permittivity (ϵ_r):	55.00	55.16	-0.28	5
		e''	21.0200	Conductivity (σ):	0.99	0.99	0.64	5
3-30-2018	Body 835	e'	53.3900	Relative Permittivity (ϵ_r):	53.39	55.20	-3.28	5
		e''	21.5200	Conductivity (σ):	1.00	0.97	3.00	5
	Body 820	e'	53.5000	Relative Permittivity (ϵ_r):	53.50	55.28	-3.21	5
		e''	21.5800	Conductivity (σ):	0.98	0.97	1.60	5
	Body 850	e'	53.2800	Relative Permittivity (ϵ_r):	53.28	55.16	-3.40	5
		e''	21.4900	Conductivity (σ):	1.02	0.99	2.89	5
3-31-2018	Head 2450	e'	38.3100	Relative Permittivity (ϵ_r):	38.31	39.20	-2.27	5
		e''	13.2200	Conductivity (σ):	1.80	1.80	0.05	5
	Head 2400	e'	38.4600	Relative Permittivity (ϵ_r):	38.46	39.30	-2.13	5
		e''	13.1100	Conductivity (σ):	1.75	1.75	-0.12	5
	Head 2480	e'	38.2100	Relative Permittivity (ϵ_r):	38.21	39.16	-2.43	5
		e''	13.3100	Conductivity (σ):	1.84	1.83	0.16	5
3-31-2018	Head 2600	e'	37.8000	Relative Permittivity (ϵ_r):	37.80	39.01	-3.10	5
		e''	13.6200	Conductivity (σ):	1.97	1.96	0.35	5
	Head 2500	e'	38.1400	Relative Permittivity (ϵ_r):	38.14	39.14	-2.55	5
		e''	13.3500	Conductivity (σ):	1.86	1.85	0.09	5
	Head 2700	e'	37.4400	Relative Permittivity (ϵ_r):	37.44	38.88	-3.72	5
		e''	13.8500	Conductivity (σ):	2.08	2.07	0.44	5
4-4-2018	Head 2450	e'	37.7700	Relative Permittivity (ϵ_r):	37.77	39.20	-3.65	5
		e''	13.5100	Conductivity (σ):	1.84	1.80	2.25	5
	Head 2400	e'	37.9100	Relative Permittivity (ϵ_r):	37.91	39.30	-3.53	5
		e''	13.3800	Conductivity (σ):	1.79	1.75	1.93	5
	Head 2480	e'	37.6700	Relative Permittivity (ϵ_r):	37.67	39.16	-3.81	5
		e''	13.5900	Conductivity (σ):	1.87	1.83	2.27	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
3-21-2018	Head 1900	e'	38.5400	Relative Permittivity (ϵ_r):	38.54	40.00	-3.65	5
		e''	13.5600	Conductivity (σ):	1.43	1.40	2.33	5
	Head 1850	e'	38.7400	Relative Permittivity (ϵ_r):	38.74	40.00	-3.15	5
		e''	13.5000	Conductivity (σ):	1.39	1.40	-0.81	5
	Head 1910	e'	38.5100	Relative Permittivity (ϵ_r):	38.51	40.00	-3.73	5
		e''	13.5800	Conductivity (σ):	1.44	1.40	3.02	5
3-31-2018	Body 2450	e'	52.4900	Relative Permittivity (ϵ_r):	52.49	52.70	-0.40	5
		e''	14.9900	Conductivity (σ):	2.04	1.95	4.72	5
	Body 2400	e'	52.5800	Relative Permittivity (ϵ_r):	52.58	52.77	-0.36	5
		e''	14.8600	Conductivity (σ):	1.98	1.90	4.48	5
	Body 2480	e'	52.4200	Relative Permittivity (ϵ_r):	52.42	52.66	-0.46	5
		e''	15.0900	Conductivity (σ):	2.08	1.99	4.45	5
3-31-2018	Body 2600	e'	52.0800	Relative Permittivity (ϵ_r):	52.08	52.51	-0.82	5
		e''	15.4600	Conductivity (σ):	2.24	2.16	3.43	5
	Body 2500	e'	52.3700	Relative Permittivity (ϵ_r):	52.37	52.64	-0.51	5
		e''	15.1000	Conductivity (σ):	2.10	2.02	3.90	5
	Body 2700	e'	51.7500	Relative Permittivity (ϵ_r):	51.75	52.38	-1.21	5
		e''	15.7200	Conductivity (σ):	2.36	2.30	2.55	5
4-2-2018	Body 5250	e'	47.9900	Relative Permittivity (ϵ_r):	47.99	48.95	-1.96	5
		e''	18.8300	Conductivity (σ):	5.50	5.35	2.69	5
	Body 5260	e'	47.9600	Relative Permittivity (ϵ_r):	47.96	48.94	-2.00	5
		e''	18.8400	Conductivity (σ):	5.51	5.36	2.71	5
	Body 5600	e'	47.3900	Relative Permittivity (ϵ_r):	47.39	48.48	-2.24	5
		e''	19.1500	Conductivity (σ):	5.96	5.76	3.50	5
	Body 5750	e'	47.1500	Relative Permittivity (ϵ_r):	47.15	48.27	-2.33	5
		e''	19.2900	Conductivity (σ):	6.17	5.94	3.90	5
	Body 5825	e'	47.0300	Relative Permittivity (ϵ_r):	47.03	48.20	-2.43	5
		e''	19.3700	Conductivity (σ):	6.27	6.00	4.56	5
4-9-2018	Body 5250	e'	47.2500	Relative Permittivity (ϵ_r):	47.25	48.95	-3.48	5
		e''	18.0700	Conductivity (σ):	5.27	5.35	-1.46	5
	Body 5260	e'	47.2300	Relative Permittivity (ϵ_r):	47.23	48.94	-3.49	5
		e''	18.0800	Conductivity (σ):	5.29	5.36	-1.43	5
	Body 5600	e'	46.7100	Relative Permittivity (ϵ_r):	46.71	48.48	-3.65	5
		e''	18.3100	Conductivity (σ):	5.70	5.76	-1.04	5
	Body 5750	e'	46.5100	Relative Permittivity (ϵ_r):	46.51	48.27	-3.66	5
		e''	18.4400	Conductivity (σ):	5.90	5.94	-0.68	5
	Body 5825	e'	46.4000	Relative Permittivity (ϵ_r):	46.40	48.20	-3.73	5
		e''	18.5100	Conductivity (σ):	6.00	6.00	-0.08	5

8.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d194	7-19-2017	835	1g	9.33	9.30
				10g	6.03	6.09
D1900V2	5d190	9-20-2017	1900	1g	38.30	40.00
				10g	20.10	21.10
D2450V2	939	9-19-2017	2450	1g	52.30	50.70
				10g	24.60	23.90
D2600V2	1097	1-17-2018	2600	1g	56.40	54.40
				10g	25.30	24.20
D5GHzV2	1184	8-23-2017	5300	1g	81.30	76.40
				10g	23.20	21.30
			5500	1g	80.60	77.10
				10g	22.90	21.30
			5600	1g	82.30	79.20
				10g	23.40	22.20
D5GHzV2	1209	2-15-2018	5800	1g	78.10	76.40
				10g	22.20	21.20
			5250	1g	80.80	75.70
				10g	23.10	21.00
			5600	1g	83.40	79.00
				10g	23.80	21.90
D5GHzV2	1209	2-15-2018	5750	1g	80.70	75.60
				10g	22.90	20.80

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
3-6-2018	D1900V2	5d190	Body	1g	3.94	39.40	40.00	-1.50
				10g	2.02	20.20	21.10	-4.27
3-21-2018	D1900V2	5d190	Body	1g	4.03	40.30	40.00	0.75
				10g	2.07	20.70	21.10	-1.90
3-28-2018	D5GHzV2 (5300)	1184	Head	1g	7.59	75.90	81.30	-6.64
				10g	2.15	21.50	23.20	-7.33
3-28-2018	D5GHzV2 (5500)	1184	Head	1g	7.58	75.80	80.60	-5.96
				10g	2.16	21.60	22.90	-5.68
3-28-2018	D5GHzV2 (5600)	1184	Head	1g	7.83	78.30	82.30	-4.86
				10g	2.21	22.10	23.40	-5.56
3-28-2018	D5GHzV2 (5800)	1184	Head	1g	7.28	72.80	78.10	-6.79
				10g	2.06	20.60	22.20	-7.21
4-3-2018	D5GHzV2 (5300)	1184	Head	1g	7.86	78.60	81.30	-3.32
				10g	2.23	22.30	23.20	-3.88
4-3-2018	D5GHzV2 (5500)	1184	Head	1g	7.52	75.20	80.60	-6.70
				10g	2.14	21.40	22.90	-6.55
4-3-2018	D5GHzV2 (5600)	1184	Head	1g	8.09	80.90	82.30	-1.70
				10g	2.30	23.00	23.40	-1.71
4-3-2018	D5GHzV2 (5800)	1184	Head	1g	7.10	71.00	78.10	-9.09
				10g	2.01	20.10	22.20	-9.46

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
3-15-2018	D835V2	4d194	Head	1g	0.93	9.29	9.33	-0.43
				10g	0.61	6.11	6.03	1.33
3-15-2018	D835V2	4d194	Body	1g	1.00	9.96	9.30	7.10
				10g	0.65	6.54	6.09	7.39
3-30-2018	D835V2	4d194	Body	1g	1.00	9.96	9.30	7.10
				10g	0.66	6.55	6.09	7.55
3-31-2018	D2450V2	939	Head	1g	5.28	52.80	52.30	0.96
				10g	2.41	24.10	24.60	-2.03
3-31-2018	D2600V2	1097	Head	1g	6.11	61.10	56.40	8.33
				10g	2.68	26.80	25.30	5.93
4-4-2018	D2450V2	939	Head	1g	5.57	55.70	52.30	6.50
				10g	2.55	25.50	24.60	3.66

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
3-21-2018	D1900V2	5d190	Head	1g	4.10	41.00	38.30	7.05
				10g	2.08	20.80	20.10	3.48
3-31-2018	D2450V2	939	Body	1g	4.95	49.50	50.70	-2.37
				10g	2.28	22.80	23.90	-4.60
3-31-2018	D2600V2	1097	Body	1g	5.12	51.20	54.40	-5.88
				10g	2.26	22.60	24.20	-6.61
4-2-2018	D5GHzV2 (5250)	1209	Body	1g	7.33	73.30	75.70	-3.17
				10g	2.07	20.70	21.00	-1.43
4-2-2018	D5GHzV2 (5600)	1209	Body	1g	8.02	80.20	79.00	1.52
				10g	2.24	22.40	21.90	2.28
4-2-2018	D5GHzV2 (5750)	1209	Body	1g	6.94	69.40	75.60	-8.20
				10g	1.94	19.40	20.80	-6.73
4-9-2018	D5GHzV2 (5250)	1209	Body	1g	7.63	76.30	75.70	0.79
				10g	2.10	21.00	21.00	0.00
4-9-2018	D5GHzV2 (5600)	1209	Body	1g	8.15	81.50	79.00	3.16
				10g	2.23	22.30	21.90	1.83
4-9-2018	D5GHzV2 (5750)	1209	Body	1g	7.09	70.90	75.60	-6.22
				10g	1.95	19.50	20.80	-6.25

9 Conducted Output Power Measurements

9.1 GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity sensor back-off		
					Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.4	33.6	24.6	25.0	32.2	23.1	23.5	32.0	23.0	23.5
			190	836.6	33.7	24.6		32.2	23.2		32.0	23.0	
			251	848.8	33.6	24.6		32.1	23.1		31.9	22.9	
GPRS (GMSK)	CS1	1	128	824.4	33.6	24.6	25.0	32.2	23.2	23.5	31.9	22.9	23.5
			190	836.6	33.5	24.4		32.1	23.1		31.8	22.8	
			251	848.8	33.4	24.3		31.9	22.9		31.7	22.6	
		2	128	824.4	31.5	25.5	25.5	29.5	23.5	23.5	29.1	23.1	23.5
			190	836.6	31.5	25.5		29.4	23.4		29.0	23.0	
			251	848.8	31.3	25.3		29.2	23.2		28.8	22.8	
		3	128	824.4	29.5	25.2	25.4	27.3	23.0	23.4	26.9	22.7	23.4
			190	836.6	29.4	25.2		27.3	23.0		26.9	22.6	
			251	848.8	29.3	25.1		27.2	22.9		26.7	22.4	
		4	128	824.4	27.5	24.5	25.5	25.8	22.7	23.5	25.3	22.3	23.5
			190	836.6	27.5	24.5		25.8	22.8		25.4	22.4	
			251	848.8	27.4	24.4		25.6	22.6		25.2	22.2	
EGPRS (8PSK)	MCS5	1	128	824.4	27.0	18.0	18.5	25.4	16.3	16.5	25.2	16.2	16.5
			190	836.6	27.1	18.1		25.4	16.4		25.2	16.2	
			251	848.8	26.9	17.9		25.2	16.2		25.0	16.0	
		2	128	824.4	24.9	18.9	19.5	23.2	17.2	17.5	23.0	16.9	17.5
			190	836.6	25.0	19.0		23.2	17.2		23.0	17.0	
			251	848.8	24.9	18.8		23.1	17.1		22.9	16.9	
		3	128	824.4	22.6	18.4	19.2	20.7	16.4	17.7	20.7	16.5	17.7
			190	836.6	22.9	18.6		20.8	16.5		20.8	16.5	
			251	848.8	22.8	18.5		20.6	16.4		20.6	16.3	
		4	128	824.4	23.0	20.0	20.5	20.9	17.9	18.0	20.8	17.8	18.0
			190	836.6	23.0	20.0		21.0	18.0		20.9	17.9	
			251	848.8	23.0	20.0		20.8	17.8		20.7	17.7	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power and 4 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity sensor back-off		
					Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.2	21.1	21.5	27.3	18.2	19.0	27.3	18.2	19.0
			661	1880.0	30.2	21.2		27.3	18.2		27.3	18.3	
			810	1909.8	30.2	21.1		27.3	18.3		27.3	18.3	
GPRS (GMSK)	CS1	1	512	1850.2	30.1	21.1	21.5	27.2	18.2	19.0	27.2	18.2	19.0
			661	1880.0	30.0	21.0		27.0	18.0		27.1	18.0	
			810	1909.8	29.9	20.9		27.0	18.0		27.0	18.0	
		2	512	1850.2	27.9	21.8	22.0	24.4	18.4	19.0	24.4	18.4	19.0
			661	1880.0	27.8	21.8		24.2	18.2		24.3	18.3	
			810	1909.8	27.7	21.7		24.4	18.4		24.4	18.4	
		3	512	1850.2	26.2	21.9	21.9	22.3	18.1	18.9	22.3	18.1	18.9
			661	1880.0	26.0	21.7		22.1	17.8		22.1	17.8	
			810	1909.8	26.2	21.9		22.2	18.0		22.2	18.0	
		4	512	1850.2	24.3	21.3	22.0	20.7	17.7	19.0	20.7	17.7	19.0
			661	1880.0	24.2	21.2		20.6	17.6		20.7	17.7	
			810	1909.8	24.2	21.2		20.8	17.7		20.8	17.8	
EGPRS (8PSK)	MCS5	1	512	1850.2	25.5	16.4	17.5	22.5	13.4	14.5	22.5	13.4	14.5
			661	1880.0	25.4	16.3		22.3	13.3		22.3	13.3	
			810	1909.8	25.5	16.5		22.4	13.4		22.4	13.4	
		2	512	1850.2	23.2	17.2	18.5	20.2	14.2	15.5	20.2	14.2	15.5
			661	1880.0	23.2	17.1		20.1	14.1		20.1	14.1	
			810	1909.8	23.3	17.2		20.1	14.1		20.2	14.2	
		3	512	1850.2	21.5	17.2	18.7	18.5	14.2	15.7	18.5	14.2	15.7
			661	1880.0	21.4	17.1		18.4	14.1		18.4	14.1	
			810	1909.8	21.5	17.2		18.4	14.2		18.5	14.2	
		4	512	1850.2	20.6	17.6	18.5	16.6	13.6	15.5	16.7	13.7	15.5
			661	1880.0	20.5	17.5		16.6	13.6		16.6	13.6	
			810	1909.8	20.6	17.6		16.7	13.7		16.7	13.7	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power and 4 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

9.2 W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13.
A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

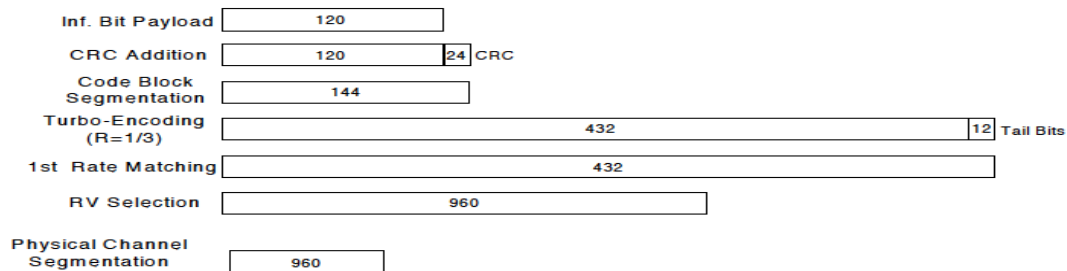**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 12			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	A _{hs} = β_{hs}/β_c	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7. Therefore, the RF conducted power is not measured.

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. RF output power (dBm)	Reduced. RF output power Hotspot back-off (dBm)	Reduced. RF output power Proximity sensor back-off (dBm)
						Meas. Avg Pwr	Meas. Avg Pwr	Meas. Avg Pwr
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	23.2	19.2	19.2
			9400	1880.0		23.2	19.2	19.2
			9538	1907.6		22.4	18.9	18.9
	HSDPA	Subtest 1	9262	1852.4	0	22.2	18.2	18.1
			9400	1880.0		22.2	18.1	18.2
			9538	1907.6		21.7	17.8	17.8
		Subtest 2	9262	1852.4	0	22.2	18.1	18.1
			9400	1880.0		22.1	18.1	18.1
			9538	1907.6		21.6	17.8	17.8
		Subtest 3	9262	1852.4	0.5	21.7	17.6	17.6
			9400	1880.0		21.6	17.6	17.6
			9538	1907.6		21.2	17.3	17.3
		Subtest 4	9262	1852.4	0.5	21.7	17.6	17.6
			9400	1880.0		21.6	17.6	17.6
			9538	1907.6		21.2	17.3	17.3
	HSUPA	Subtest 1	9262	1852.4	0	22.1	18.1	18.1
			9400	1880.0		22.1	18.1	18.1
			9538	1907.6		21.8	17.8	17.8
		Subtest 2	9262	1852.4	2	20.1	16.1	16.1
			9400	1880.0		20.1	16.1	16.1
			9538	1907.6		19.8	15.8	15.8
		Subtest 3	9262	1852.4	1	21.2	17.1	17.1
			9400	1880.0		21.1	17.1	17.1
			9538	1907.6		20.8	16.8	16.8
		Subtest 4	9262	1852.4	2	20.1	16.1	16.1
			9400	1880.0		20.1	16.1	16.1
			9538	1907.6		19.8	15.8	15.8
		Subtest 5	9262	1852.4	0	22.2	18.2	18.2
			9400	1880.0		22.2	18.2	18.2
			9538	1907.6		21.8	17.9	17.9
	DC-HSDPA	Subtest 1	9262	1852.4	0	22.2	18.2	18.2
			9400	1880.0		22.2	18.2	18.2
			9538	1907.6		21.7	17.8	17.8
		Subtest 2	9262	1852.4	0	22.2	18.2	18.2
			9400	1880.0		22.2	18.1	18.2
			9538	1907.6		21.5	17.8	17.8
		Subtest 3	9262	1852.4	0.5	21.7	17.7	17.7
			9400	1880.0		21.7	17.6	17.7
			9538	1907.6		21.1	17.3	17.3
		Subtest 4	9262	1852.4	0.5	21.7	17.6	17.7
			9400	1880.0		21.6	17.6	17.7
			9538	1907.6		21.1	17.3	17.3

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. RF output power (dBm)	Reduced. RF output power Hotspot back-off (dBm)	Reduced. RF output power Proximity sensor back-off (dBm)
						Meas. Avg Pwr	Meas. Avg Pwr	Meas. Avg Pwr
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.9	21.9	22.0
			4183	836.6		23.9	21.9	21.9
			4233	846.6		24.0	22.1	22.0
	HSDPA	Subtest 1	4132	826.4	0	23.3	21.2	21.2
			4183	836.6		23.3	21.3	21.3
			4233	846.6		23.4	21.4	21.4
		Subtest 2	4132	826.4	0	23.2	21.2	21.2
			4183	836.6		23.3	21.3	21.3
			4233	846.6		23.4	21.4	21.4
		Subtest 3	4132	826.4	0.5	22.7	20.9	20.7
			4183	836.6		22.8	20.8	20.8
			4233	846.6		22.9	20.9	20.9
		Subtest 4	4132	826.4	0.5	22.7	20.7	20.7
			4183	836.6		22.8	20.8	20.8
			4233	846.6		22.9	20.9	20.9
	HSUPA	Subtest 1	4132	826.4	0	23.3	21.2	21.2
			4183	836.6		23.3	21.4	21.3
			4233	846.6		23.4	21.4	21.4
		Subtest 2	4132	826.4	2	21.2	19.2	19.2
			4183	836.6		21.3	19.3	19.3
			4233	846.6		21.4	19.4	19.4
		Subtest 3	4132	826.4	1	22.3	20.4	20.4
			4183	836.6		22.3	20.3	20.3
			4233	846.6		22.4	20.4	20.4
		Subtest 4	4132	826.4	2	21.4	19.2	19.2
			4183	836.6		21.3	19.3	19.3
			4233	846.6		21.4	19.4	19.4
		Subtest 5	4132	826.4	0	23.2	21.2	21.2
			4183	836.6		23.3	21.3	21.3
			4233	846.6		23.4	21.4	21.4
	DC-HSDPA	Subtest 1	4132	826.4	0	22.8	20.8	20.8
			4183	836.6		22.9	20.9	20.9
			4233	846.6		22.9	21.0	21.0
		Subtest 2	4132	826.4	0	22.8	20.7	20.7
			4183	836.6		22.9	20.9	20.9
			4233	846.6		22.9	21.0	20.9
		Subtest 3	4132	826.4	0.5	22.3	20.3	20.2
			4183	836.6		22.4	20.3	20.4
			4233	846.6		22.4	20.4	20.5
		Subtest 4	4132	826.4	0.5	22.3	20.2	20.3
			4183	836.6		22.4	20.4	20.4
			4233	846.6		22.4	20.4	20.4

9.3 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
256 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
256 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3, 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10	6.6.2.2.1, 6.6.3.3.13	20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.3.3.15				
NS_21	6.6.2.2.1, 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 5 Measured Results - Max power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0		24.6	
			1	25	0		24.4	
			1	49	0		24.7	
			25	0	1		23.4	
			25	12	1		23.4	
			25	25	1		23.5	
		16QAM	50	0	1		23.5	
			1	0	1		23.9	
			1	25	1		23.8	
			1	49	1		23.9	
			25	0	2		22.5	
			25	12	2		22.5	
			25	25	2		22.5	
			50	0	2		22.5	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	24.4	24.5	24.6
			1	12	0	24.2	24.4	24.5
			1	24	0	24.3	24.4	24.5
			12	0	1	23.5	23.4	23.4
			12	7	1	23.4	23.4	23.4
			12	13	1	23.4	23.4	23.4
			25	0	1	23.4	23.4	23.5
		16QAM	1	0	1	24.0	23.6	23.5
			1	12	1	23.9	23.5	23.5
			1	24	1	23.9	23.4	23.5
			12	0	2	22.6	22.5	22.5
			12	7	2	22.5	22.5	22.5
			12	13	2	22.5	22.5	22.5
			25	0	2	22.5	22.5	22.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	24.4	24.3	24.4
			1	8	0	24.3	24.4	24.5
			1	14	0	24.3	24.3	24.1
			8	0	1	23.4	23.3	23.3
			8	4	1	23.5	23.4	23.4
			8	7	1	23.5	23.4	23.4
			15	0	1	23.4	23.4	23.3
		16QAM	1	0	1	23.4	23.5	23.9
			1	8	1	23.6	23.5	24.0
			1	14	1	23.3	23.5	23.6
			8	0	2	22.6	22.4	22.4
			8	4	2	22.6	22.5	22.5
			8	7	2	22.6	22.4	22.5
			15	0	2	22.5	22.4	22.5

LTE Band 5 Measured Results - Max power (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	24.6	24.5	24.6
			1	3	0	24.5	24.4	24.5
			1	5	0	24.4	24.4	24.5
			3	0	0	24.5	24.5	24.5
			3	1	0	24.4	24.5	24.5
			3	3	0	24.4	24.4	24.5
			6	0	1	23.4	23.4	23.3
		16QAM	1	0	1	23.5	23.6	23.6
			1	3	1	23.3	23.4	23.5
			1	5	1	23.5	23.4	23.5
			3	0	1	23.8	23.9	23.8
			3	1	1	23.8	23.8	23.8
			3	3	1	23.8	23.8	23.8
			6	0	2	22.3	22.6	22.6

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 5 Measured Results - Reduced power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						829 MHz	836.5 MHz	844 MHz	829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0		22.1			22.0	
			1	25	0		21.8			21.8	
			1	49	0		22.2			22.2	
			25	0	0		21.9			21.9	
			25	12	0		22.0			21.9	
			25	25	0		21.9			21.9	
			50	0	0		22.0			22.0	
		16QAM	1	0	0		22.4			22.0	
			1	25	0		22.3			21.8	
			1	49	0		22.6			22.1	
			25	0	0		21.9			21.9	
			25	12	0		22.0			21.9	
			25	25	0		21.9			21.9	
			50	0	0		22.0			21.9	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.1	21.8	22.0	21.8	22.0	22.0
			1	12	0	21.9	21.6	21.9	21.7	21.9	21.7
			1	24	0	21.9	21.7	21.9	21.7	21.8	21.8
			12	0	0	21.9	21.9	21.8	21.9	21.9	21.8
			12	7	0	22.0	21.9	21.8	21.9	21.9	21.8
			12	13	0	21.8	21.8	21.8	21.9	21.8	21.9
			25	0	0	21.9	21.9	21.8	21.9	21.9	21.8
		16QAM	1	0	0	22.1	22.4	22.1	22.4	22.0	22.1
			1	12	0	22.1	22.3	21.9	22.4	22.0	21.9
			1	24	0	22.0	22.4	21.9	22.3	22.0	22.0
			12	0	0	22.0	22.0	21.9	22.1	22.0	21.9
			12	7	0	22.0	22.0	21.9	22.1	22.0	21.9
			12	13	0	21.9	21.9	21.9	22.0	21.9	21.9
			25	0	0	21.9	22.0	21.8	22.0	21.9	21.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	21.8	21.8	21.8	21.9	21.8	21.8
			1	8	0	22.0	21.8	21.6	22.0	21.8	21.8
			1	14	0	21.9	21.8	21.7	21.8	21.9	21.8
			8	0	0	21.9	21.7	21.8	21.9	21.8	21.8
			8	4	0	21.9	21.9	21.8	21.9	21.9	21.9
			8	7	0	21.9	21.8	21.8	21.9	21.9	21.9
			15	0	0	21.9	21.8	21.8	21.9	21.9	21.8
		16QAM	1	0	0	22.1	22.5	21.8	22.4	21.8	22.1
			1	8	0	22.2	22.2	22.0	22.4	21.9	22.1
			1	14	0	22.1	22.3	21.8	22.3	21.8	21.9
			8	0	0	21.9	21.9	21.9	22.0	22.0	21.8
			8	4	0	22.0	21.9	22.0	22.1	22.1	21.9
			8	7	0	22.0	21.9	21.9	22.0	22.0	21.9
			15	0	0	21.9	21.9	21.9	22.0	21.9	21.8

LTE Band 5 Measured Results - Reduced power (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	21.8	21.8	21.8	21.8	21.8	21.9
			1	3	0	21.9	21.8	22.0	21.9	21.9	21.9
			1	5	0	21.9	21.8	21.7	21.8	21.8	21.8
			3	0	0	21.8	21.7	21.8	21.8	21.8	21.7
			3	1	0	21.9	21.8	21.8	21.8	21.9	21.7
			3	3	0	21.8	21.8	21.8	21.8	21.8	21.8
			6	0	0	21.9	21.8	21.8	21.9	21.9	21.8
		16QAM	1	0	0	22.4	21.8	21.9	21.9	22.3	22.0
			1	3	0	22.4	22.1	22.0	22.0	22.5	22.1
			1	5	0	22.2	22.0	21.9	22.0	22.2	22.0
			3	0	0	21.9	21.8	21.9	22.0	22.0	21.8
			3	1	0	22.0	21.9	21.8	22.1	22.0	21.9
			3	3	0	22.0	21.9	21.9	22.1	22.0	21.9
			6	0	0	21.8	22.0	22.0	22.1	21.8	22.0

Note(s):


10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band TDD Measured Results


Procedure used to establish SAR test signal for LTE TDD Band

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band 41 and TDD
- Go to “Config...”

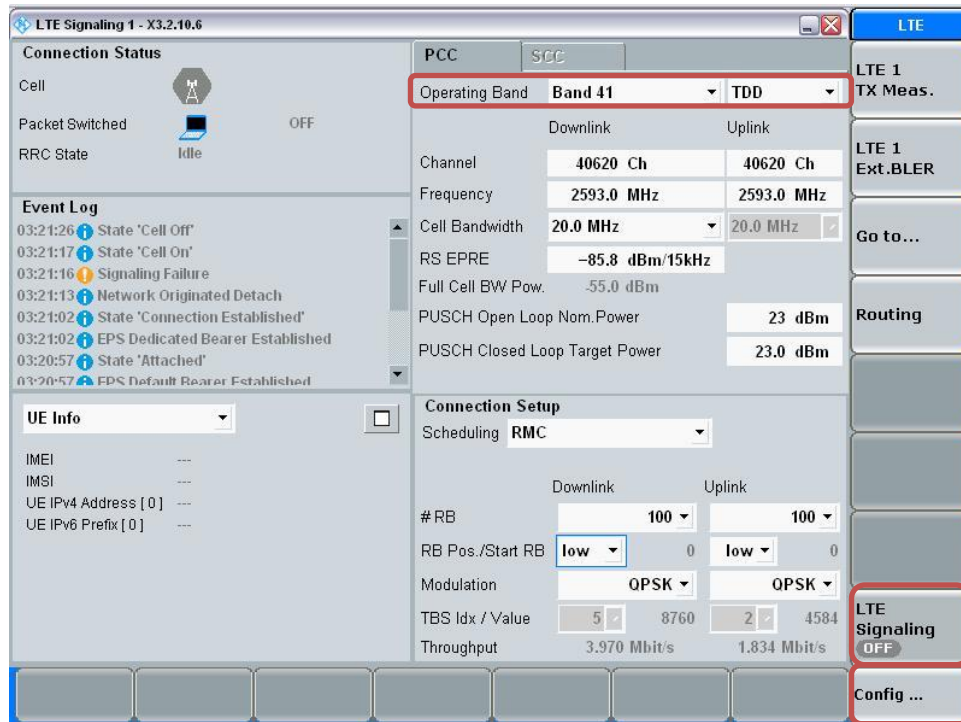


- Go to “Physical Cell Setup”
- Select “TDD” and Set “Uplink Downlink Configuration” to “0”
- Turn the cell on using “ON | OFF” key

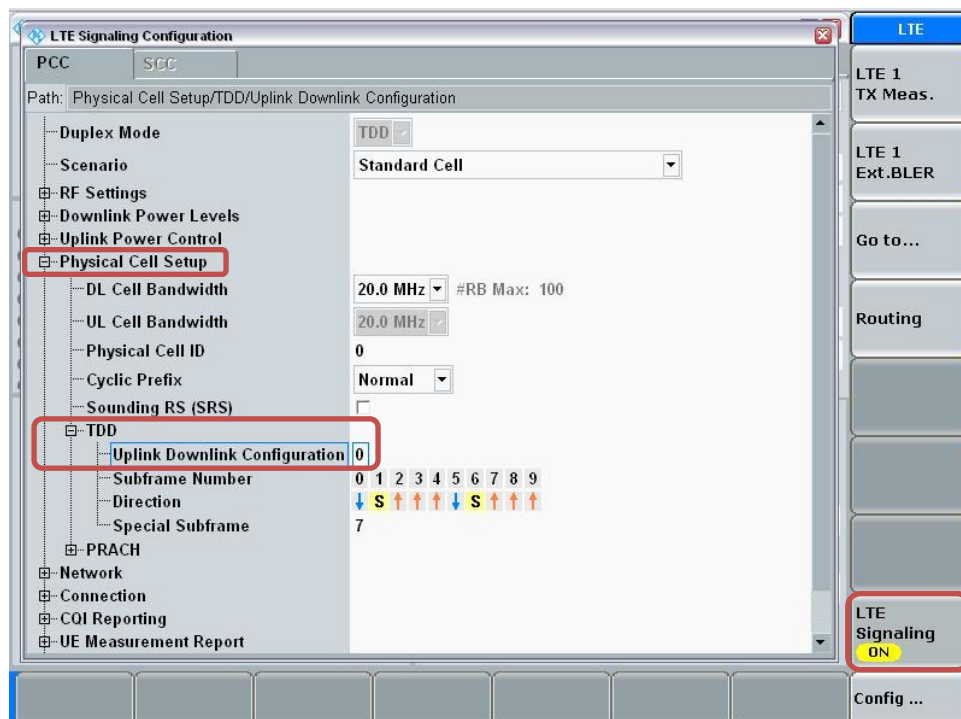


Connect to EUT


- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

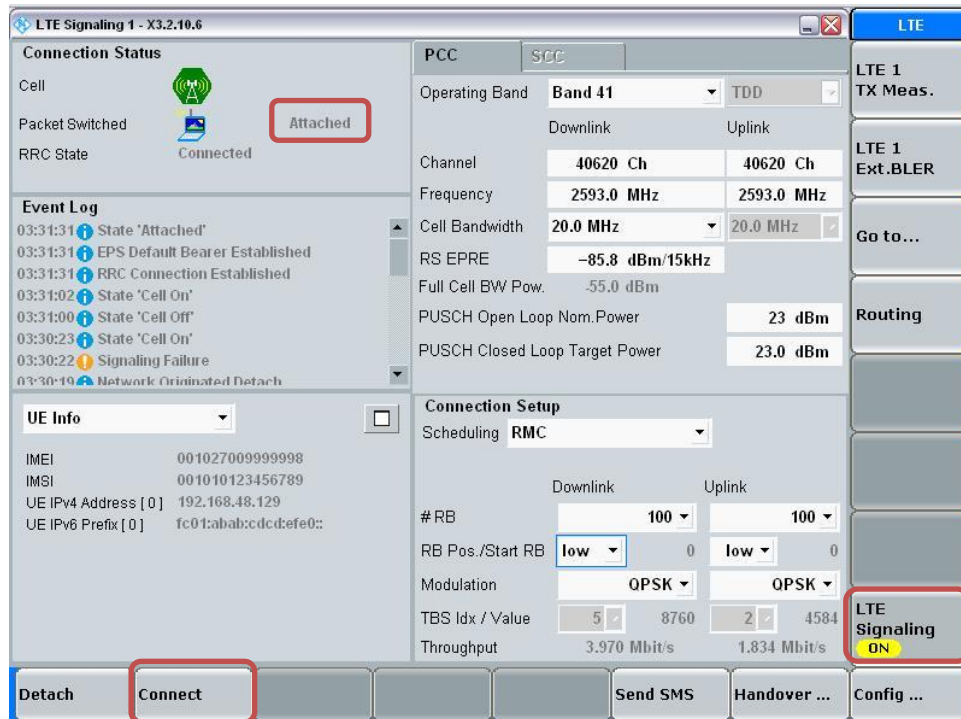**Max Power Setting**

- Select “LTE 1 TX Meas.”
- Press “RESTART | STOP” Soft key

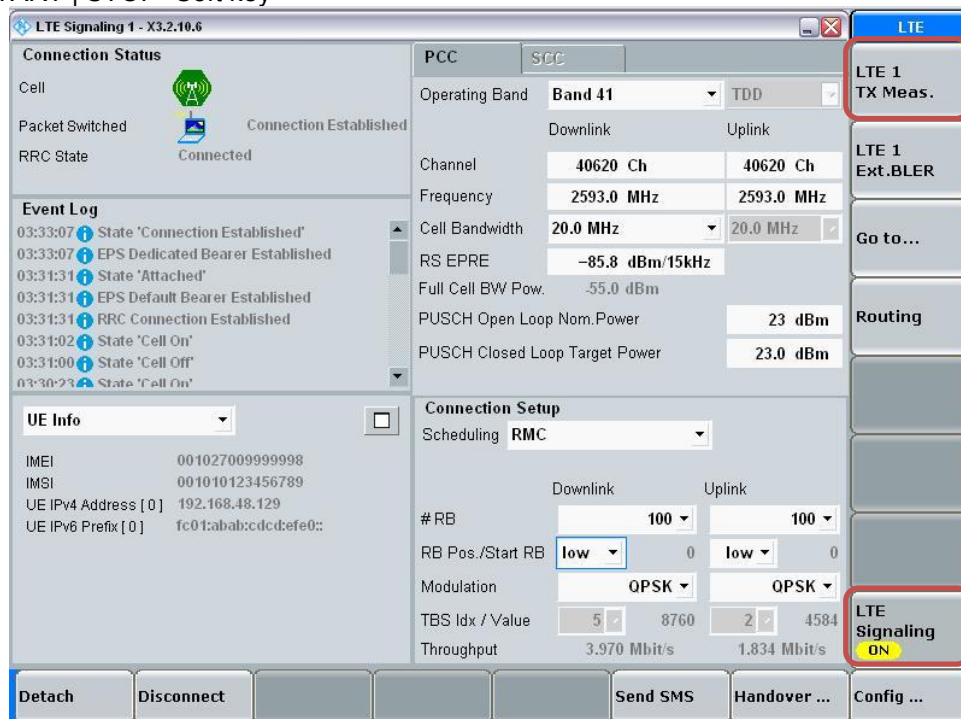

- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

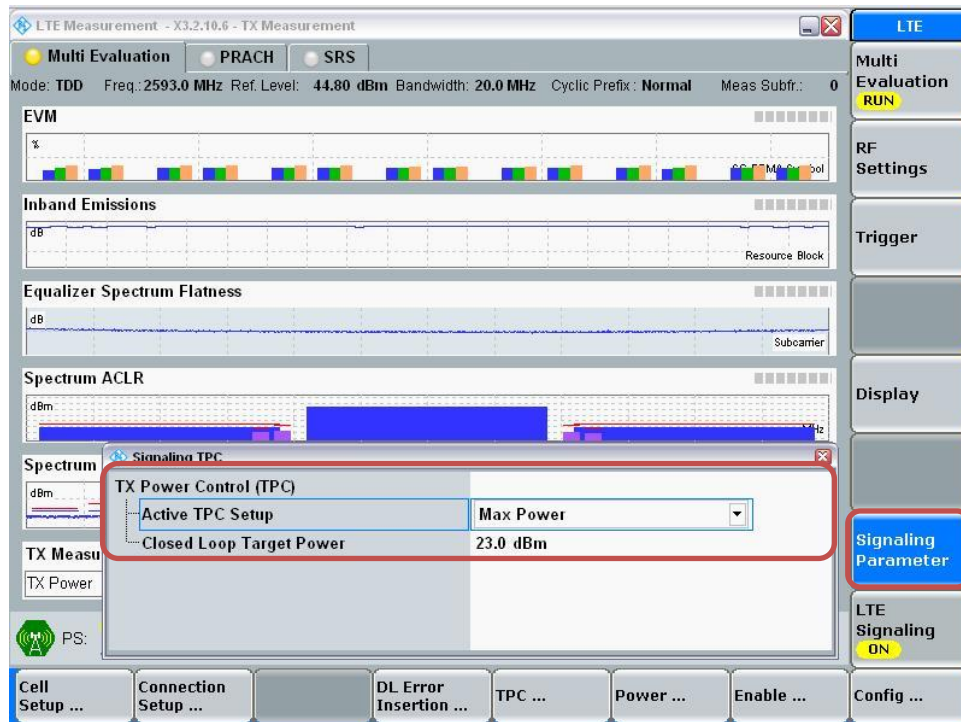

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”



LTE Band 41 Measured Results - Max power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						2565 MHz	2605 MHz	2645 MHz
LTE Band 41	20	QPSK	1	0	0	23.3	24.2	24.2
			1	49	0	23.7	24.4	24.3
			1	99	0	24.1	24.4	24.5
			50	0	1	23.0	23.4	23.5
			50	24	1	23.0	23.4	23.4
			50	50	1	23.1	23.3	23.5
			100	0	1	23.0	23.4	23.5
		16QAM	1	0	1	22.3	23.2	23.0
			1	49	1	22.9	23.0	23.3
			1	99	1	23.0	23.4	22.7
			50	0	2	22.0	22.4	22.5
			50	24	2	22.0	22.4	22.4
			50	50	2	22.1	22.4	22.5
			100	0	2	22.0	22.3	22.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						2562.5 MHz	2605 MHz	2647.5 MHz
LTE Band 41	15	QPSK	1	0	0	23.3	24.4	24.5
			1	37	0	22.9	24.3	24.1
			1	74	0	24.0	24.4	23.5
			36	0	1	22.9	23.4	23.5
			36	20	1	23.0	23.4	23.5
			36	39	1	22.9	23.3	23.5
			75	0	1	22.9	23.4	23.5
		16QAM	1	0	1	22.1	23.2	23.5
			1	37	1	23.0	23.0	23.2
			1	74	1	23.1	23.4	22.7
			36	0	2	22.1	22.3	22.4
			36	20	2	21.7	22.3	22.4
			36	39	2	21.9	22.3	22.4
			75	0	2	21.8	22.5	22.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						2560 MHz	2605 MHz	2650 MHz
LTE Band 41	10	QPSK	1	0	0	22.6	24.3	24.2
			1	25	0	23.5	24.3	24.0
			1	49	0	23.6	24.5	23.4
			25	0	1	23.1	23.3	23.5
			25	12	1	23.2	23.2	23.2
			25	25	1	23.2	23.4	23.4
			50	0	1	23.2	23.3	23.5
		16QAM	1	0	1	21.8	23.5	23.3
			1	25	1	22.7	23.1	23.1
			1	49	1	22.9	23.4	22.5
			25	0	2	22.2	22.3	22.3
			25	12	2	22.1	22.4	22.3
			25	25	2	22.1	22.3	22.4
			50	0	2	22.2	22.3	22.5

LTE Band 41 Measured Results - Max power (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						2557.5 MHz	2605 MHz	2652.5 MHz
LTE Band 41	5	QPSK	1	0	0	22.7	24.2	24.0
			1	12	0	23.1	24.2	23.8
			1	24	0	23.2	24.3	23.5
			12	0	1	22.9	23.3	23.3
			12	7	1	23.2	23.3	23.5
			12	13	1	23.0	23.3	23.4
			25	0	1	23.1	23.3	23.5
		16QAM	1	0	1	21.7	23.3	23.1
			1	12	1	22.2	23.1	23.0
			1	24	1	22.3	23.2	22.8
			12	0	2	22.1	22.3	22.5
			12	7	2	21.9	22.3	22.5
			12	13	2	21.9	22.1	22.4
			25	0	2	22.1	22.3	22.4

LTE Band 41 Measured Results - Reduced power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						2565 MHz	2605 MHz	2645 MHz	2565 MHz	2605 MHz	2645 MHz
LTE Band 41	20	QPSK	1	0	0	22.6	23.2	23.1	22.6	23.3	23.2
			1	49	0	22.9	23.4	23.3	23.0	23.4	23.3
			1	99	0	23.1	23.4	23.5	23.1	23.5	23.4
			50	0	0	22.9	23.4	23.3	23.0	23.3	23.5
			50	24	0	23.0	23.3	23.3	22.9	23.3	23.4
			50	50	0	23.1	23.3	23.4	23.0	23.3	23.5
		16QAM	100	0	0	23.0	23.4	23.4	23.0	23.4	23.5
			1	0	0	22.2	22.9	23.0	22.0	23.0	23.2
			1	49	0	23.0	23.2	23.2	22.8	23.1	23.4
			1	99	0	23.0	23.2	22.8	22.9	23.2	22.7
			50	0	0	21.9	22.4	22.3	21.9	22.4	22.5
			50	24	0	22.0	22.3	22.3	22.0	22.4	22.5
			50	50	0	22.0	22.3	22.4	21.9	22.4	22.5
			100	0	0	22.0	22.3	22.3	22.0	22.4	22.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						2562.5 MHz	2605 MHz	2647.5 MHz	2562.5 MHz	2605 MHz	2647.5 MHz
LTE Band 41	15	QPSK	1	0	0	22.9	23.5	23.5	22.9	23.5	23.5
			1	37	0	22.2	23.4	23.3	22.6	23.3	22.4
			1	74	0	23.2	23.5	23.5	23.2	23.5	23.5
			36	0	0	22.9	23.3	23.3	22.8	23.4	23.5
			36	20	0	23.1	23.3	23.3	22.9	23.3	23.5
			36	39	0	23.0	23.3	23.2	22.9	23.3	23.5
		16QAM	75	0	0	23.0	23.4	23.5	22.9	23.4	23.5
			1	0	0	22.1	23.4	23.4	21.9	23.4	23.5
			1	37	0	22.9	23.2	22.8	22.3	23.4	23.3
			1	74	0	23.1	23.3	22.8	23.1	23.3	22.6
			36	0	0	22.1	22.4	22.3	21.9	22.4	22.5
			36	20	0	22.1	22.3	22.3	22.0	22.4	22.5
			36	39	0	22.1	22.3	22.3	22.0	22.4	22.5
			75	0	0	22.0	22.3	22.5	21.9	22.4	22.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						2560 MHz	2605 MHz	2650 MHz	2560 MHz	2605 MHz	2650 MHz
LTE Band 41	10	QPSK	1	0	0	22.8	23.5	23.3	22.7	23.5	23.5
			1	25	0	23.1	23.3	23.3	23.0	23.1	23.3
			1	49	0	23.5	23.5	23.4	23.3	23.4	23.3
			25	0	0	23.2	23.4	23.1	23.0	23.3	23.3
			25	12	0	23.0	23.4	23.0	23.1	23.2	23.4
			25	25	0	23.1	23.3	23.3	23.2	23.3	23.5
		16QAM	50	0	0	23.2	23.3	23.3	23.1	23.3	23.4
			1	0	0	21.9	23.4	23.2	21.8	23.4	23.3
			1	25	0	22.8	23.1	22.9	22.7	23.2	23.0
			1	49	0	22.9	23.4	22.6	22.8	23.5	22.4
			25	0	0	22.2	22.4	22.3	22.0	22.3	22.4
			25	12	0	22.2	22.3	22.4	22.2	22.3	22.5
			25	25	0	21.9	22.4	22.3	22.2	22.4	22.4
			50	0	0	22.1	22.4	22.2	21.9	22.3	22.4

LTE Band 41 Measured Results - Reduced power (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						2557.5 MHz	2605 MHz	2652.5 MHz	2557.5 MHz	2605 MHz	2652.5 MHz
LTE Band 41	5	QPSK	1	0	0	23.0	23.2	23.2	23.0	23.3	23.4
			1	12	0	23.2	23.1	23.1	23.0	23.1	23.4
			1	24	0	23.0	23.1	23.1	23.2	23.2	23.3
			12	0	0	23.1	23.3	23.2	23.1	23.3	23.4
			12	7	0	23.1	23.2	23.2	23.2	23.1	23.5
			12	13	0	23.1	23.2	23.1	22.9	23.1	23.4
			25	0	0	22.8	23.1	23.3	23.0	23.3	23.4
		16QAM	1	0	0	21.9	23.1	23.2	22.0	23.3	22.9
			1	12	0	22.4	23.1	23.2	22.4	23.2	22.9
			1	24	0	22.5	23.0	23.2	22.6	23.1	22.6
			12	0	0	22.1	22.3	22.3	22.2	22.3	22.2
			12	7	0	22.1	22.3	22.2	22.2	22.3	22.2
			12	13	0	22.0	22.2	22.1	22.1	22.2	22.2
			25	0	0	22.1	22.3	22.3	22.1	22.1	22.4

9.3.1 LTE Rel. 10 Carrier Aggregation

LTE Release 10 Carrier Aggregation

The following power measurements were performed with a single carrier uplink; CA for this particular project only supports one (1) uplink and two (2) downlinks.

1) Max power results

Type	LTE CA combinations		PCC (UL)					SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel				Freq. (MHz)
Intra Contiguous	41C (0), (1), (2), (3)		QPSK	10	40740	2605.0	1/49	15	40860	2617.0	24.50	24.23	-0.27	
Intra Non- Contiguous	41A	+	41A (0), (1)	QPSK	10	40740	2605.0	1/49	10	41190	2650.0	24.50	24.19	-0.31

2) Reduction power results of Hotspot back-off

Type	LTE CA combinations		PCC (UL)					SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel				Freq. (MHz)
Intra Contiguous	41C (0), (1), (2), (3)		QPSK	20	41140	2645.0	1/99	20	40942	2625.2	23.50	23.20	-0.30	
Intra Non- Contiguous	41A	+	41A (0), (1)	QPSK	20	41140	2645.0	1/99	20	40340	2565.0	23.50	23.17	-0.33

3) Reduction power results of Proximity sensor back-off

Type	LTE CA combinations		PCC (UL)					SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel				Freq. (MHz)
Intra Contiguous	41C (0), (1), (2), (3)		QPSK	20	41140	2645.0	50/0	20	40942	2625.2	23.50	23.08	-0.42	
Intra Non- Contiguous	41A	+	41A (0), (1)	QPSK	20	41140	2645.0	50/0	20	40340	2565.0	23.50	23.11	-0.39

Note(s):

1. Per KDB 941225 D05A LTE Rel. 10 KDB inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power doesn't exceed LTE Release 8 by more than a 1/4 dB.
2. When the same frequency band is used for both contiguous and non-contiguous in DL CA Intra band, power was measured using the configuration with the largest aggregated bandwidth and maximum output power among the contiguous and non-contiguous in DL CA Intra band configurations.

9.4 Wi-Fi 2.4 GHz (DTS Band)

Measured Results (Max power)

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412	18.5	19.5	Yes
		6	2437	18.7		
		11	2462	18.7		
		12	2467	12.4	13.5	No
		13	2472	12.5	13.5	
802.11g	6 Mbps	1	2412	Not Require	13.5	No
		6	2437			
		11	2462			
		12	2467		10.5	
		13	2472		5.5	
802.11n (HT20)	6.5 Mbps	1	2412	Not Require	13.5	No
		6	2437			
		11	2462			
		12	2467		10.5	
		13	2472		5.5	

Measured Results (Reduced power)

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Reduced Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412	12.5	13.5	Yes
		6	2437	12.6		
		11	2462	13.4		
		12	2467	12.4	13.5	No
		13	2472	12.5	13.5	
802.11g	6 Mbps	1	2412	12.5	13.5	No
		6	2437	12.7		
		11	2462	13.5		
		12	2467	9.6	10.5	
		13	2472	4.9	5.5	
802.11n (HT20)	6.5 Mbps	1	2412	12.6	13.5	No
		6	2437	12.7		
		11	2462	13.5		
		12	2467	9.6	10.5	
		13	2472	4.9	5.5	

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the tune-up limit and the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

9.5 Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr		
					Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	17.9	18.5	Yes	Not Required	11.5	No
			56	5280	17.7					
			60	5300	18.1					
			64	5320	18.3					
	802.11n (HT20)	6.5 Mbps	52	5260	18.0	18.5	No	Not Required	11.5	No
			56	5280	17.7					
			60	5300	18.4					
			64	5320	18.4					
	802.11n (HT40)	13.5 Mbps	54	5270	Not Required	15.5	No	11.1	11.5	Yes
			62	5310				10.7		
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	18.3	18.5	Yes	Not Required	11.5	No
			116	5580	18.4					
			132	5660	18.2					
			140	5700	18.1					
	802.11n (HT20)	6.5 Mbps	100	5500	18.3	18.5	No	Not Required	11.5	No
			116	5580	18.4					
			132	5660	18.2					
			140	5700	18.0					
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	15.5	No	11.2	11.5	Yes
			118	5590				11.4		
			142	5710				11.1		
5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	18.1	18.5	Yes	Not Required	11.5	No
			157	5785	18.2					
			165	5825	17.7					
	802.11n (HT20)	6.5 Mbps	149	5745	18.1	18.5	No	Not Required	11.5	No
			157	5785	18.1					
			165	5825	17.7					
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	15.5	No	11.4	11.5	Yes
			159	5795				11.1		

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6 Bluetooth

Average Power Measured Results


Band (GHz)	Mode	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)
2.4	GFSK	0	2402	10.3
		39	2441	9.4
		78	2480	9.3
	EDR, $\pi/4$ DQPSK	0	2402	8.2
		39	2441	7.4
		78	2480	7.2
	EDR, 8-DPSK	0	2402	8.2
		39	2441	7.4
		78	2480	7.2
	LE, GFSK	0	2402	1.1
		19	2440	0.8
		39	2480	0.8

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.884	3.750	76.9%	1.30

Duty Cycle plots

GFSK

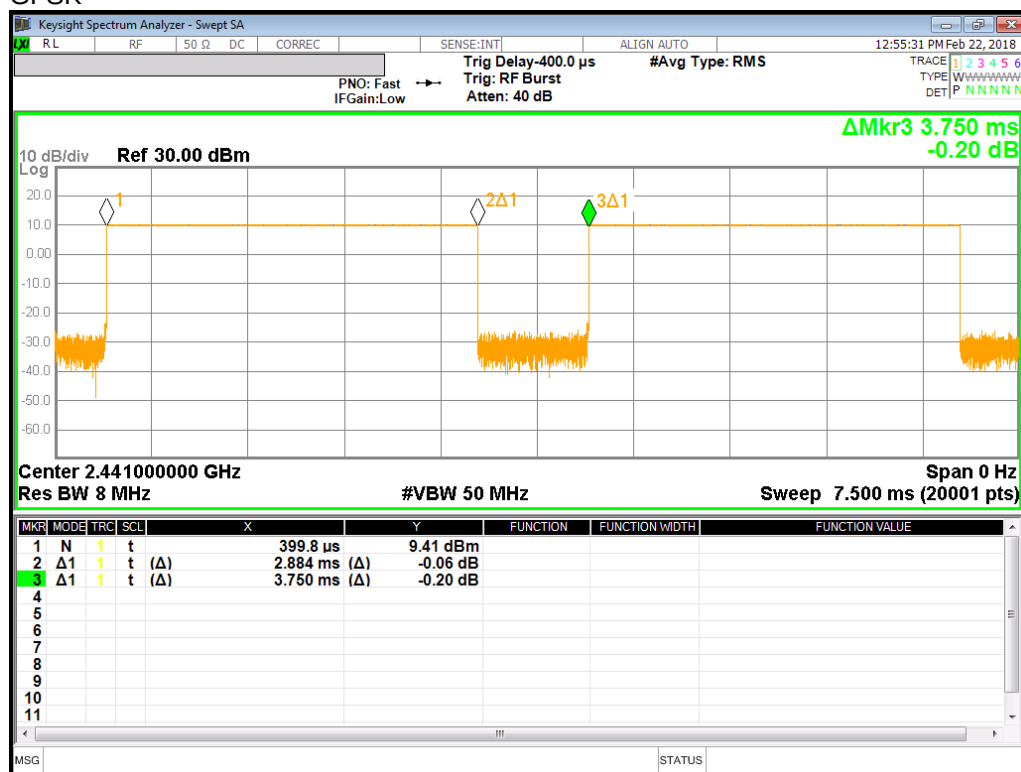

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg .

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1 GSM 850

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head (VoIP)	GPRS 4 Slot	Off	0	Left Touch	190	836.6	28.5	27.5	0.166	0.208	1
				Left Tilt	190	836.6	28.5	27.5	0.108	0.136	
				Right Touch	190	836.6	28.5	27.5	0.235	0.295	
				Right Tilt	190	836.6	28.5	27.5	0.114	0.143	
Body-worn	GPRS 4 Slot	Off	15	Rear	190	836.6	28.5	27.5	0.367	0.461	2
				Front	190	836.6	28.5	27.5	0.227	0.285	
Hotspot	GPRS 4 Slot	On	10	Rear	190	836.6	26.5	25.3	0.451	0.591	3
				Front	190	836.6	26.5	25.3	0.228	0.299	
				Edge 2	190	836.6	26.5	25.3	0.193	0.253	
				Edge 3	190	836.6	26.5	25.3	0.191	0.250	
				Edge 4	190	836.6	26.5	25.3	0.049	0.064	

10.2 GSM1900

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head (VoIP)	GPRS 4 Slot	Off	0	Left Touch	661	1880.0	25.0	24.2	0.048	0.058	4
				Left Tilt	661	1880.0	25.0	24.2	0.027	0.033	
				Right Touch	661	1880.0	25.0	24.2	0.030	0.037	
				Right Tilt	661	1880.0	25.0	24.2	0.032	0.039	
Body-worn	GPRS 4 Slot	Off	15	Rear	661	1880.0	25.0	24.2	0.394	0.476	5
				Front	661	1880.0	25.0	24.2	0.191	0.231	
Hotspot	GPRS 4 Slot	On	10	Rear	661	1880.0	22.0	20.6	0.381	0.521	6
				Front	661	1880.0	22.0	20.6	0.187	0.255	
				Edge 2	661	1880.0	22.0	20.6	0.028	0.038	
				Edge 3	661	1880.0	22.0	20.6	0.404	0.552	
				Edge 4	661	1880.0	22.0	20.6	0.038	0.052	

10.3 W-CDMA Band II

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	9400	1880.0	24.0	23.4	0.122	0.141	7
				Left Tilt	9400	1880.0	24.0	23.4	0.077	0.088	
				Right Touch	9400	1880.0	24.0	23.4	0.066	0.076	
				Right Tilt	9400	1880.0	24.0	23.4	0.063	0.072	
Bod-worn	Rel 99 RMC	Off	15	Rear	9262	1852.4	24.0	23.4	0.699	0.812	
					9400	1880.0	24.0	23.4	0.889	1.028	8
					9538	1907.6	24.0	22.3	0.677	1.001	
				Front	9400	1880.0	24.0	23.4	0.399	0.461	
Hotspot	Rel 99 RMC	On	10	Rear	9262	1852.4	20.0	19.3	0.608	0.709	
					9400	1880.0	20.0	19.4	0.794	0.920	9
					9538	1907.6	20.0	19.0	0.595	0.744	
				Front	9400	1880.0	20.0	19.4	0.351	0.407	
				Edge 2	9400	1880.0	20.0	19.4	0.073	0.085	
				Edge 3	9262	1852.4	20.0	19.3	0.602	0.702	
					9400	1880.0	20.0	19.4	0.763	0.884	
					9538	1907.6	20.0	19.0	0.545	0.681	
				Edge 4	9400	1880.0	20.0	19.4	0.089	0.103	
RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Phablet-10g	Rel 99 RMC	Off	13	Rear	9400	1880.0	24.0	23.4	0.375	0.434	
			6	Front	9400	1880.0	24.0	23.4	0.619	0.716	
			0	Edge 2	9400	1880.0	24.0	23.4	0.294	0.340	
			13	Edge 3	9400	1880.0	24.0	23.4	0.547	0.632	
			0	Edge 4	9400	1880.0	24.0	23.4	0.325	0.376	
		On	0	Rear	9400	1880.0	20.0	19.4	1.000	1.161	
			0	Front	9400	1880.0	20.0	19.4	1.080	1.254	
			0	Edge 3	9400	1880.0	20.0	19.4	1.120	1.301	10

10.4 W-CDMA Band V

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	4183	836.6	24.5	23.9	0.133	0.152	
				Left Tilt	4183	836.6	24.5	23.9	0.087	0.099	
				Right Touch	4183	836.6	24.5	23.9	0.198	0.226	11
				Right Tilt	4183	836.6	24.5	23.9	0.108	0.123	
Body-worn	Rel 99 RMC	Off	15	Rear	4183	836.6	24.5	23.9	0.377	0.430	12
				Front	4183	836.6	24.5	23.9	0.238	0.271	
Hotspot	Rel 99 RMC	On	10	Rear	4183	836.6	22.5	21.9	0.536	0.610	13
				Front	4183	836.6	22.5	21.9	0.274	0.312	
				Edge 2	4183	836.6	22.5	21.9	0.169	0.192	
				Edge 3	4183	836.6	22.5	21.9	0.209	0.238	
				Edge 4	4183	836.6	22.5	21.9	0.044	0.050	

10.5 LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	Off	0	Left Touch	20525	836.5	1	49	25.0	24.7	0.152	0.164	14
							25	25	24.0	23.5	0.111	0.126	
				Left Tilt	20525	836.5	1	49	25.0	24.7	0.099	0.106	
							25	25	24.0	23.5	0.072	0.081	
				Right Touch	20525	836.5	1	49	25.0	24.7	0.208	0.225	
							25	25	24.0	23.5	0.156	0.177	
				Right Tilt	20525	836.5	1	49	25.0	24.7	0.103	0.111	
							25	25	24.0	23.5	0.075	0.084	
Body-worn	QPSK	Off	15	Rear	20525	836.5	1	49	25.0	24.7	0.484	0.523	15
							25	25	24.0	23.5	0.359	0.407	
				Front	20525	836.5	1	49	25.0	24.7	0.295	0.319	
							25	25	24.0	23.5	0.218	0.247	
Hotspot	QPSK	On	10	Rear	20525	836.5	1	49	23.0	22.2	0.556	0.671	16
							25	12	23.0	22.0	0.507	0.643	
				Front	20525	836.5	1	49	23.0	22.2	0.314	0.379	
							25	12	23.0	22.0	0.280	0.355	
				Edge 2	20525	836.5	1	49	23.0	22.2	0.188	0.227	
							25	12	23.0	22.0	0.168	0.213	
				Edge 3	20525	836.5	1	49	23.0	22.2	0.257	0.310	
							25	12	23.0	22.0	0.231	0.293	
				Edge 4	20525	836.5	1	49	23.0	22.2	0.044	0.053	
							25	12	23.0	22.0	0.039	0.050	

10.6 LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	Off	0	Left Touch	41140	2645.0	1	99	24.5	24.5	0.151	0.151	17
							50	50	23.5	23.5	0.130	0.130	
				Left Tilt	41140	2645.0	1	99	24.5	24.5	0.081	0.081	
							50	50	23.5	23.5	0.062	0.062	
				Right Touch	41140	2645.0	1	99	24.5	24.5	0.054	0.054	
							50	50	23.5	23.5	0.048	0.048	
				Right Tilt	41140	2645.0	1	99	24.5	24.5	0.112	0.112	
							50	50	23.5	23.5	0.099	0.099	
Body-worn	QPSK	Off	15	Rear	41140	2645.0	1	99	24.5	24.5	0.388	0.388	18
							50	50	23.5	23.5	0.332	0.332	
				Front	41140	2645.0	1	99	24.5	24.5	0.203	0.203	
							50	50	23.5	23.5	0.186	0.186	
Hotspot	QPSK	On	10	Rear	41140	2645.0	1	99	23.5	23.5	0.644	0.644	19
							50	50	23.5	23.4	0.607	0.616	
				Front	41140	2645.0	1	99	23.5	23.5	0.323	0.323	
							50	50	23.5	23.4	0.319	0.324	
				Edge 2	41140	2645.0	1	99	23.5	23.5	0.095	0.095	
							50	50	23.5	23.4	0.100	0.101	
				Edge 3	41140	2645.0	1	99	23.5	23.5	0.790	0.790	
							50	50	23.5	23.4	0.688	0.698	
				Edge 4	41140	2645.0	1	99	23.5	23.5	0.209	0.209	
							50	50	23.5	23.4	0.207	0.210	

10.7 Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head	On	0	Left Touch	11	2462.0	0.136	99.7	13.5	13.4			
					Left Tilt	11	2462.0	0.180	99.7	13.5	13.4			
					Right Touch	11	2462.0	0.261	99.7	13.5	13.4			
					Right Tilt	11	2462.0	0.331	99.7	13.5	13.4	0.264	0.270	20
		Body-worn	Off	15	Rear	6	2437.0	0.151	99.7	19.5	18.7	0.118	0.142	21
					Front	6	2437.0	0.065	99.7	19.5	18.7			
		Hotspot	Off	10	Rear	6	2437.0	0.288	99.7	19.5	18.7	0.228	0.274	22
					Front	6	2437.0	0.126	99.7	19.5	18.7			
					Edge 1	6	2437.0	0.274	99.7	19.5	18.7			
					Edge 4	6	2437.0	0.092	99.7	19.5	18.7			

Note(s):

1. When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.
2. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.8 Wi-Fi (U-NII Bands)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	54	5270.0	0.611	96.0	11.5	11.1					
					Left Tilt	54	5270.0	0.590	96.0	11.5	11.1					
					Right Touch	54	5270.0	1.015	96.0	11.5	11.1	0.496	0.561			
					Right Tilt	54	5270.0	1.137	96.0	11.5	11.1	0.523	0.592			23
	802.11a 6 Mbps	Body-worn	Off	15	Rear	64	5320.0	0.233	98.2	18.5	18.3	0.111	0.118			
					Front	64	5320.0	0.726	98.2	18.5	18.3	0.396	0.421			24
	802.11a 6 Mbps	Phablet-10g	Off	0	Rear	64	5320.0	8.783	98.2	18.5	18.3					
					Front	64	5320.0	18.077	98.2	18.5	18.3			1.570	1.670	25
					Edge 1	64	5320.0	10.158	98.2	18.5	18.3			1.460	1.553	
					Edge 4	64	5320.0	1.340	98.2	18.5	18.3					
Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled											
5.5 GHz U-NII 2C	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	110	5550.0	1.146	96.0	11.5	11.4	0.547	0.583			
					Left Tilt	110	5550.0	1.071	96.0	11.5	11.4					
					Right Touch	102	5510.0	1.739	96.0	11.5	11.2	0.942	1.056			
						110	5550.0	1.973	96.0	11.5	11.4	1.030	1.097			26
					Right Tilt	102	5510.0	1.591	96.0	11.5	11.2	0.807	0.904			
						110	5550.0	1.833	96.0	11.5	11.4	0.957	1.020			
	802.11a 6 Mbps	Body-worn	Off	15	Rear	116	5580.0	0.260	98.2	18.5	18.4	0.118	0.124			
					Front	116	5580.0	1.090	98.2	18.5	18.4	0.522	0.549			27
	802.11a 6 Mbps	Phablet-10g	Off	0	Rear	116	5580.0	4.289	98.2	18.5	18.4					
					Front	100	5500.0	25.250	98.2	18.5	18.3			2.210	2.351	
						116	5580.0	22.771	98.2	18.5	18.4			2.290	2.408	28
					Edge 1	116	5580.0	9.403	98.2	18.5	18.4			1.240	1.304	
Edge 4					116	5580.0	0.127	98.2	18.5	18.4						
Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)				Plot No.
Tune-up limit	Meas.	Meas.	Scaled													
5.8 GHz U-NII 3	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	151	5755.0	1.107	96.0	11.5	11.4	0.546	0.580			
					Left Tilt	151	5755.0	1.079	96.0	11.5	11.4					
					Right Touch	151	5755.0	1.737	96.0	11.5	11.4	0.936	0.995			29
						159	5795.0	1.596	96.0	11.5	11.1	0.818	0.940			
					Right Tilt	151	5755.0	1.481	96.0	11.5	11.4	0.820	0.872			
						159	5795.0	1.415	96.0	11.5	11.1	0.764	0.878			
	802.11a 6 Mbps	Body-worn	Off	15	Rear	157	5785.0	0.236	98.2	18.5	18.2	0.101	0.110			
					Front	157	5785.0	1.222	98.2	18.5	18.2	0.508	0.555			30
	802.11a 6 Mbps	Hotspot	Off	10	Rear	157	5785.0	0.349	98.2	18.5	18.2	0.158	0.173			
					Front	149	5745.0	2.202	98.2	18.5	18.1	0.893	0.992			31
						157	5785.0	2.049	98.2	18.5	18.2	0.866	0.947			
					Edge 1	157	5785.0	0.920	98.2	18.5	18.2	0.432	0.472			
					Edge 4	157	5785.0	0.172	98.2	18.5	18.2					

10.9 Bluetooth

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	GFSK	Head	0	Left Touch	0	2402.0	76.9	10.5	10.3	0.041	0.055	
				Left Tilt	0	2402.0	76.9	10.5	10.3	0.050	0.068	
				Right Touch	0	2402.0	76.9	10.5	10.3	0.084	0.114	
				Righttt Tilt	0	2402.0	76.9	10.5	10.3	0.110	0.150	32

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-w orn	2.480	10.5	11	15	1.2	0.154
	Hotspot	2.480	10.5	11	10	1.7	0.231

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
835	GSM 850	Hotspot	Rear	No	0.451	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.536	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.556	N/A	N/A
1900	GSM 1900	Hotspot	Edge 3	No	0.404	N/A	N/A
	WCDMA Band II	Body	Rear	Yes	0.889	0.881	1.01
2400	Wi-Fi 802.11b/g/n	Head	Right Tilt	No	0.264	N/A	N/A
	Bluetooth	Head	Right Tilt	No	0.110	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	No	0.790	N/A	N/A
5300	Wi-Fi 802.11a/n	Head	Right Tilt	No	0.523	N/A	N/A
5500	Wi-Fi 802.11a/n	Head	Right Touch	Yes	1.030	0.995	1.04
5800	Wi-Fi 802.11a/n	Head	Right Touch	Yes	0.936	0.891	1.05

Peak spatial-average (10g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
1900	WCDMA Band II	Phablet-10g	Edge 3	No	1.120	N/A	N/A
5300	Wi-Fi 802.11a/n	Phablet-10g	Front	No	1.570	N/A	N/A
5500	Wi-Fi 802.11a/n	Phablet-10g	Front	Yes	2.290	2.24	1.02

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations	
Head	1	GSM(Voice/GPRS)	+ DTS
	2	GSM(Voice/GPRS)	+ BT
	3	GSM(Voice/GPRS)	+ U-NII
	4	W-CDMA	+ DTS
	5	W-CDMA	+ BT
	6	W-CDMA	+ U-NII
	7	LTE	+ DTS
	8	LTE	+ BT
	9	LTE	+ U-NII
Body-worn	10	GSM(Voice/GPRS)	+ DTS
	11	GSM(Voice/GPRS)	+ BT
	12	GSM(Voice/GPRS)	+ U-NII
	13	W-CDMA	+ DTS
	14	W-CDMA	+ BT
	15	W-CDMA	+ U-NII
	16	LTE	+ DTS
	17	LTE	+ BT
	18	LTE	+ U-NII
Hotspot	19	GSM(GPRS)	+ DTS
	20	GSM(GPRS)	+ BT
	21	GSM(GPRS)	+ U-NII
	22	WCDMA	+ DTS
	23	WCDMA	+ BT
	24	WCDMA	+ U-NII
	25	LTE	+ DTS
	26	LTE	+ BT
	27	LTE	+ U-NII
Phablet-10g	28	WCDMA	+ U-NII

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. U-NII supports Wi-Fi Direct, Hotspot and VoIP.
3. GPRS, W-CDMA, LTE supports Hotspot and VoIP.
4. DTS or U-NII Radio cannot transmit simultaneously with Bluetooth Radio.
5. DTS Radio cannot transmit simultaneously with U-NII Radio.
6. BT tethering is consider about each RF exposure conditions

12.1 Sum of the SAR for GSM 850 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.295	0.270	1.097	0.150	0.565	No	1.392	No	0.445	No
Body-worn	Rear	0.461	0.142	0.124	0.154	0.603	No	0.585	No	0.615	No
	Front	0.285	0.142	0.555	0.154	0.427	No	0.840	No	0.439	No
Hotspot	Rear	0.591	0.274	0.173	0.231	0.865	No	0.764	No	0.822	No
	Front	0.299	0.274	0.992	0.231	0.573	No	1.291	No	0.530	No
	Edge 1		0.274	0.472	0.231	0.345	No	0.411	No	0.231	No
	Edge 2	0.253				0.253	No	0.253	No	0.253	No
	Edge 3	0.250				0.250	No	0.250	No	0.250	No
	Edge 4	0.064	0.274	0.992	0.231	0.338	No	1.056	No	0.295	No

12.2 Sum of the SAR for GSM 1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.058	0.270	1.097	0.150	0.328	No	1.155	No	0.208	No
Body-worn	Rear	0.476	0.142	0.124	0.154	0.618	No	0.600	No	0.630	No
	Front	0.231	0.142	0.555	0.154	0.373	No	0.786	No	0.385	No
Hotspot	Rear	0.521	0.274	0.173	0.231	0.795	No	0.694	No	0.752	No
	Front	0.255	0.274	0.992	0.231	0.529	No	1.247	No	0.486	No
	Edge 1		0.274	0.472	0.231	0.345	No	0.411	No	0.231	No
	Edge 2	0.038				0.038	No	0.038	No	0.038	No
	Edge 3	0.552				0.552	No	0.552	No	0.552	No
	Edge 4	0.052	0.274	0.992	0.231	0.326	No	1.044	No	0.283	No

12.3 Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.141	0.270	1.097	0.150	0.411	No	1.238	No	0.291	No
Body-worn	Rear	1.028	0.142	0.124	0.154	1.170	No	1.152	No	1.182	No
	Front	0.461	0.142	0.555	0.154	0.603	No	1.016	No	0.615	No
Hotspot	Rear	0.920	0.274	0.173	0.231	1.194	No	1.093	No	1.151	No
	Front	0.407	0.274	0.992	0.231	0.681	No	1.399	No	0.638	No
	Edge 1		0.274	0.472	0.231	0.345	No	0.411	No	0.231	No
	Edge 2	0.085				0.085	No	0.085	No	0.085	No
	Edge 3	0.884				0.884	No	0.884	No	0.884	No
	Edge 4	0.103	0.274	0.992	0.231	0.377	No	1.095	No	0.334	No
RF Exposure conditions	Test Position	① WWAN	② U-NII	① + ② WWAN + U-NII							
				Σ 10-g SAR (mW/g)	SPLSR (Yes/ No)						
Phablet-10g	All position	1.301	2.408	3.709	No						

12.4 Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.226	0.270	1.097	0.150	0.496	No	1.323	No	0.376	No
Body-worn	Rear	0.430	0.142	0.124	0.154	0.572	No	0.554	No	0.584	No
	Front	0.271	0.142	0.555	0.154	0.413	No	0.826	No	0.425	No
Hotspot	Rear	0.610	0.274	0.173	0.231	0.884	No	0.783	No	0.841	No
	Front	0.312	0.274	0.992	0.231	0.586	No	1.304	No	0.543	No
	Edge 1		0.274	0.472	0.231	0.345	No	0.411	No	0.231	No
	Edge 2	0.192				0.192	No	0.192	No	0.192	No
	Edge 3	0.238				0.238	No	0.238	No	0.238	No
	Edge 4	0.050	0.274	0.992	0.231	0.324	No	1.042	No	0.281	No

12.5 Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.225	0.270	1.097	0.150	0.495	No	1.322	No	0.375	No
Body-worn	Rear	0.523	0.142	0.124	0.154	0.665	No	0.647	No	0.677	No
	Front	0.319	0.142	0.555	0.154	0.461	No	0.874	No	0.473	No
Hotspot	Rear	0.671	0.274	0.173	0.231	0.945	No	0.844	No	0.902	No
	Front	0.379	0.274	0.992	0.231	0.653	No	1.371	No	0.610	No
	Edge 1		0.274	0.472	0.231	0.345	No	0.411	No	0.231	No
	Edge 2	0.227				0.227	No	0.227	No	0.227	No
	Edge 3	0.310				0.310	No	0.310	No	0.310	No
	Edge 4	0.053	0.274	0.992	0.231	0.327	No	1.045	No	0.284	No

12.6 Sum of the SAR for LTE Band 41 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.151	0.270	1.097	0.150	0.421	No	1.248	No	0.301	No
Body-worn	Rear	0.388	0.142	0.124	0.154	0.530	No	0.512	No	0.542	No
	Front	0.203	0.142	0.555	0.154	0.345	No	0.758	No	0.357	No
Hotspot	Rear	0.644	0.274	0.173	0.231	0.918	No	0.817	No	0.875	No
	Front	0.324	0.274	0.992	0.231	0.598	No	1.316	No	0.555	No
	Edge 1		0.274	0.472	0.231	0.345	No	0.411	No	0.231	No
	Edge 2	0.101				0.101	No	0.101	No	0.101	No
	Edge 3	0.790				0.790	No	0.790	No	0.790	No
	Edge 4	0.210	0.274	0.992	0.231	0.484	No	1.202	No	0.441	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg (10-g SAR is < 4.0 W/kg) or the SPLSR is < 1-g 0.04 (10-g 0.10) for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

4788388893-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

4788388893-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

4788388893-S1V1 FCC Report SAR_App C_System Check Plots

4788388893-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

4788388893-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

4788388893-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT