



FCC CFR47 PART 15 SUBPART C

Bluetooth Low Energy

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER : SM-A6050, SM-A6058, SM-A605XC

FCC ID: A3LSMA6050

REPORT NUMBER: 4788388893-E2V1

ISSUE DATE: APR 24, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	04/24/18	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. REFERENCE MEASUREMENT RESULTS	14
7.1. ON TIME AND DUTY CYCLE RESULTS	14
7.2. 99% BANDWIDTH	15
8. MEASUREMENT METHODS	17
9. SUMMARY TABLE	18
10. ANTENNA PORT TEST RESULTS	19
10.1. 6 dB BANDWIDTH	19
10.2. OUTPUT POWER	21
10.3. AVERAGE POWER	23
10.4. PSD	24
10.5. OUT-OF-BAND EMISSIONS	26

11.	RADIATED TEST RESULTS	30
11.1.	LIMITS AND PROCEDURE.....	30
11.2.	TRANSMITTER ABOVE 1 GHz.....	32
11.3.	WORST-CASE BELOW 1 GHz	42
12.	AC POWER LINE CONDUCTED EMISSIONS	44
13.	SETUP PHOTOS	49

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER: SM-A6050, SM-A6058, SM-A605XC

SERIAL NUMBER: R38K104PV9X (RADIATED, Original);
R38K104QEYH (CONDUCTED, Original);
R38K1200N9FF (RADIATED, Spot check & additional test)

DATE TESTED: FEB 22, 2018 - MAR 03, 2018 (Original)
MAR 26, 2018 - MAR 29, 2018 (Spot check, Spot check & additional test)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMA605FN BLE(FCC CFR 47 Part 15C).
And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMA6050 shares the same enclosure and circuit board as FCC ID: A3LSMA605FN. The BLE antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA605FN remains representative of FCC ID: A3LSMA6050. The test data of FCC ID: A3LSMA605FN being submitted for this application to cover BLE features.

Due to difference of charger, radiated emission under 1GHz and AC line conducted test were performed newly.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
				SM-A605FN/DS Results	SM-A6050 Results		
				FCC ID : A3LSMA605FN	FCC ID : A3LSMA6050		
DTS BLE (2.4GHz)	Band Edge	2480 MHz	54 dBuV/m	44.69 dBuV/m	44.53 dBuV/m	-0.16 dB	
	RSE	2441 MHz	74 dBuV/m	40.73 dBuV/m	40.02 dBuV/m	-0.71 dB	Noise Floor

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
DTS	A3LSMA605FN	Grant	4788372835-E1V2	Test	FCC Report DTS WLAN / All sections (Except section 11.3 and 12)
			4788372835-E2V2	Test	FCC Report BLE All sections (Except section 11.3 and 12)
DSS	A3LSMA605FN	Grant	4788372835-E3V2	Test	FCC Report BT / All sections (Except section 11.3 and 12)
NII	A3LSMA605FN	Grant	4788372835-E4V3	Test	FCC Report UNII WLAN / All sections (Except section 12 and 13)
DXX	A3LSMA605FN	Grant	4788372835-E5V2	Test	FCC Report ANT+ / All sections (Except section 7.2.5 and 8)
			4788372835-E6V3		FCC Report NFC / All sections (Except section 8.1.3 and 9)
PCE	A3LSMA605FN	Grant	4788372835-E7V2	Test	FCC Report WWAN / All sections (Except conducted Output power)

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v04.
4. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☐ Chamber 2
☒ Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC.
This test report addresses the DTS (BLE) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	BLE	Peak	1.315	1.35
		Average	1.062	1.28

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -3.25 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

Note : All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50CBC	DK5J808HS/A- E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFW	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable BLE mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

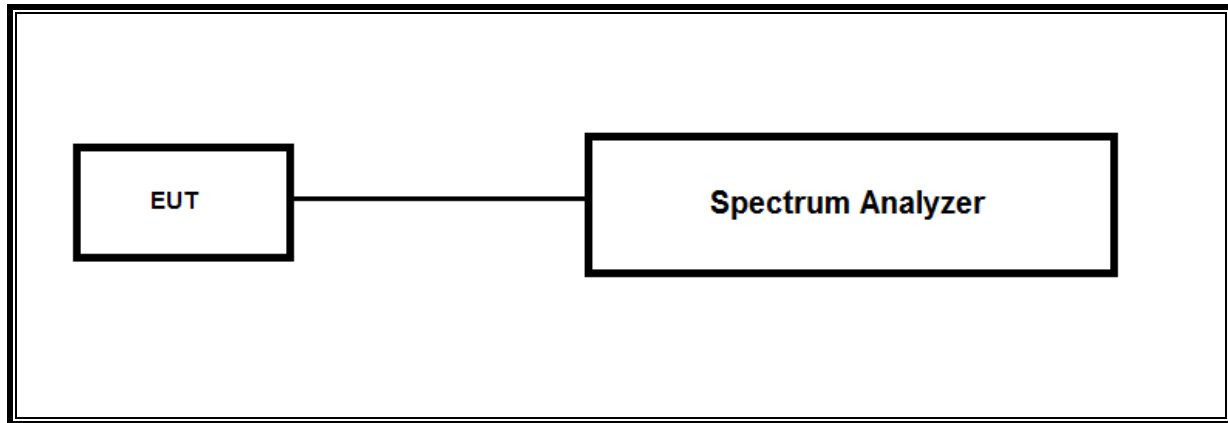

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

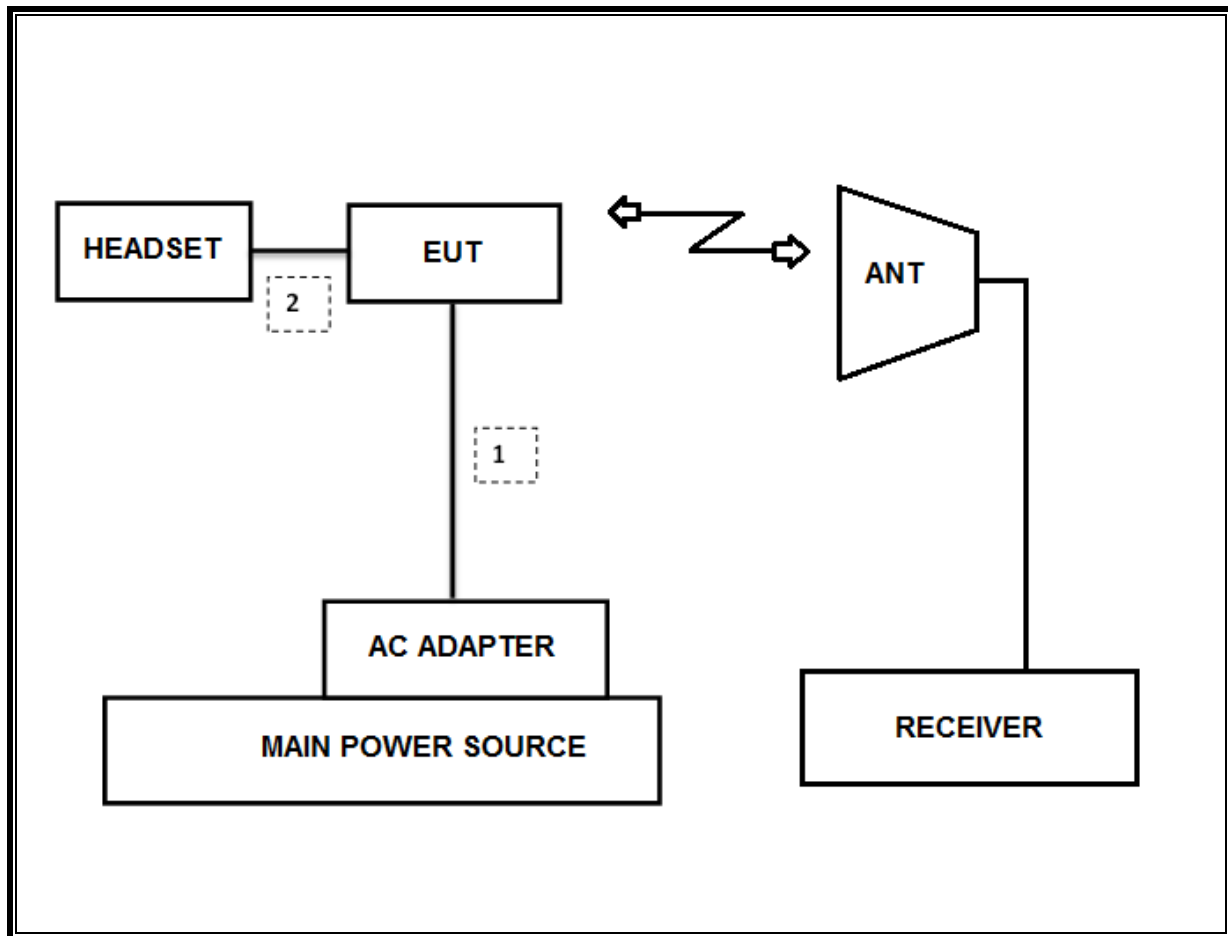

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	


7. REFERENCE MEASUREMENT RESULTS

7.1. ON TIME AND DUTY CYCLE RESULTS

LIMITS

None: for reporting purposes only.

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
BLE	0.389	0.625	0.623	62.3%	2.06	2.569

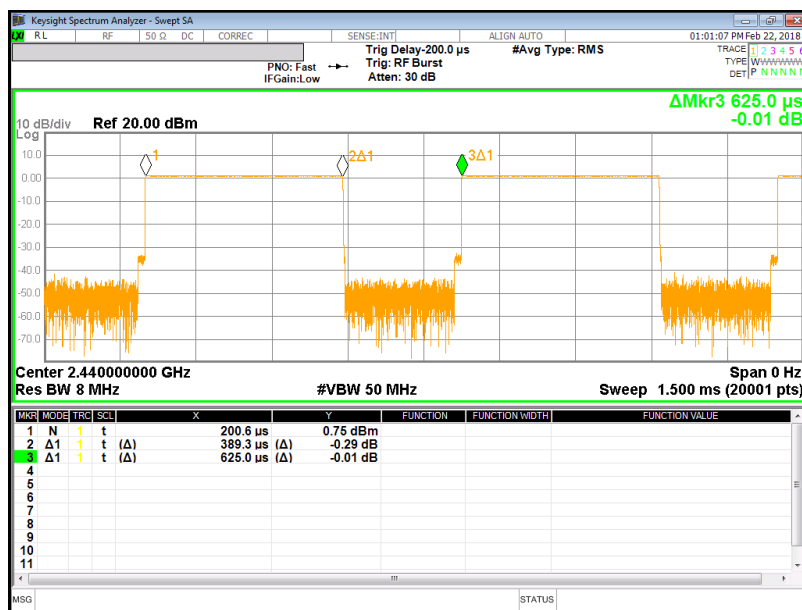

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.




TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to ≥ 3 times the RBW. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2402	1.065
Mid	2440	1.065
High	2480	1.066
Worst		1.066

99% BANDWIDTH PLOTS

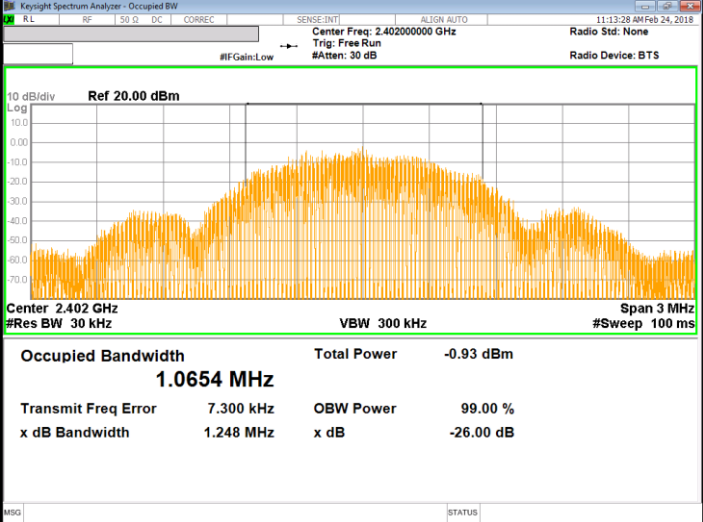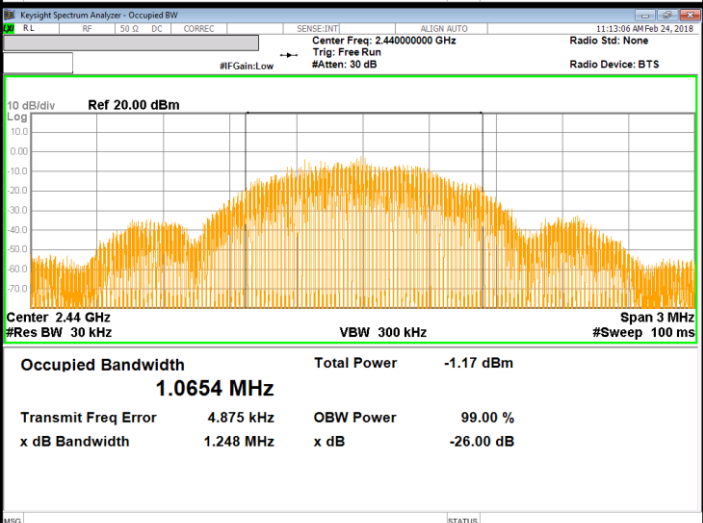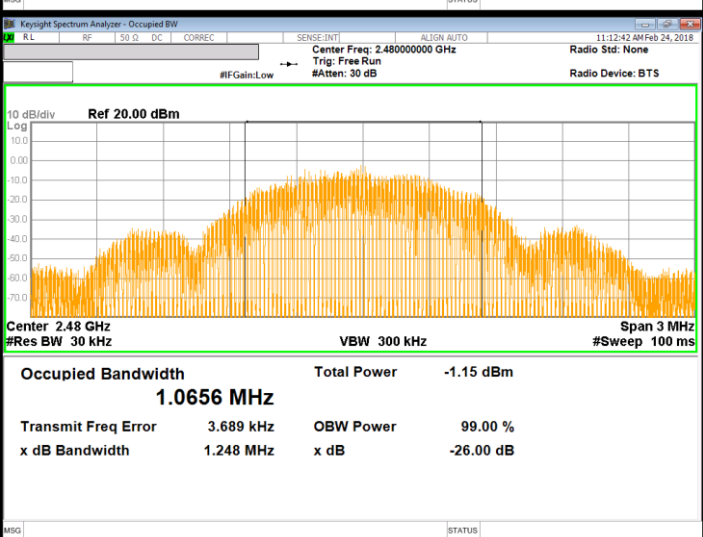Low CH	 Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.402 GHz Span 3 MHz #Res BW 30 kHz VBW 300 kHz #Sweep 100 ms Occupied Bandwidth 1.0654 MHz Total Power -0.93 dBm Transmit Freq Error 7.300 kHz OBW Power 99.00 % x dB Bandwidth 1.248 MHz x dB -26.00 dB
Middle CH	 Center Freq: 2.440000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.44 GHz Span 3 MHz #Res BW 30 kHz VBW 300 kHz #Sweep 100 ms Occupied Bandwidth 1.0654 MHz Total Power -1.17 dBm Transmit Freq Error 4.875 kHz OBW Power 99.00 % x dB Bandwidth 1.248 MHz x dB -26.00 dB
High CH	 Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.48 GHz Span 3 MHz #Res BW 30 kHz VBW 300 kHz #Sweep 100 ms Occupied Bandwidth 1.0656 MHz Total Power -1.15 dBm Transmit Freq Error 3.689 kHz OBW Power 99.00 % x dB Bandwidth 1.248 MHz x dB -26.00 dB

8. MEASUREMENT METHODS

6 dB BW : KDB 558074 D01 v04, Section 8.1.

OUTPUT POWER : KDB 558074 D01 v04, Section 9.1.1.

POWER SPECTRAL DENSITY : KDB 558074 D01 v04, Section 10.2.

Out-of-band EMISSIONS (Conducted) : KDB 558074 D01 v04, Section 11.1, 11.2.

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: KDB 558074 D01 v04, Section 11.0.

Out-of-band EMISSIONS IN RESTRICTED BANDS : KDB 558074 D01 v04, Section 12.1.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass
15.247 (b)(3)	TX conducted output power	<30dBm		Pass
15.247 (e)	PSD	<8dBm		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Pass

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v04: The transmitter output is connected to a spectrum analyzer with the RBW set to 100 KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
Low	2402	669.00	500.0
Mid	2440	666.74	500.0
High	2480	665.55	500.0
Worst		665.55	500.0

Low CH

Mkr1 2.401 999 400 GHz
0.919 dBm

Mkr1 2.439 993 775 GHz
0.668 dBm

Mkr1 2.480 001 200 GHz
0.699 dBm

Center 2.4020000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep 1.333 ms (20001 pts)

Center 2.4400000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep 1.333 ms (20001 pts)

Center 2.4800000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep 1.333 ms (20001 pts)

10.2. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v04 under section 9.1.1 utilizing spectrum analyzer.

RESULTS

Channel	Frequency [MHz]	Peak Power Reading [dBm]	Limit [dBm]	Margin [dB]
Low	2402	1.315	30.000	-28.685
Mid	2440	1.083	30.000	-28.917
High	2480	1.087	30.000	-28.913
Worst		1.315		-28.685

OUTPUT POWER PLOTS

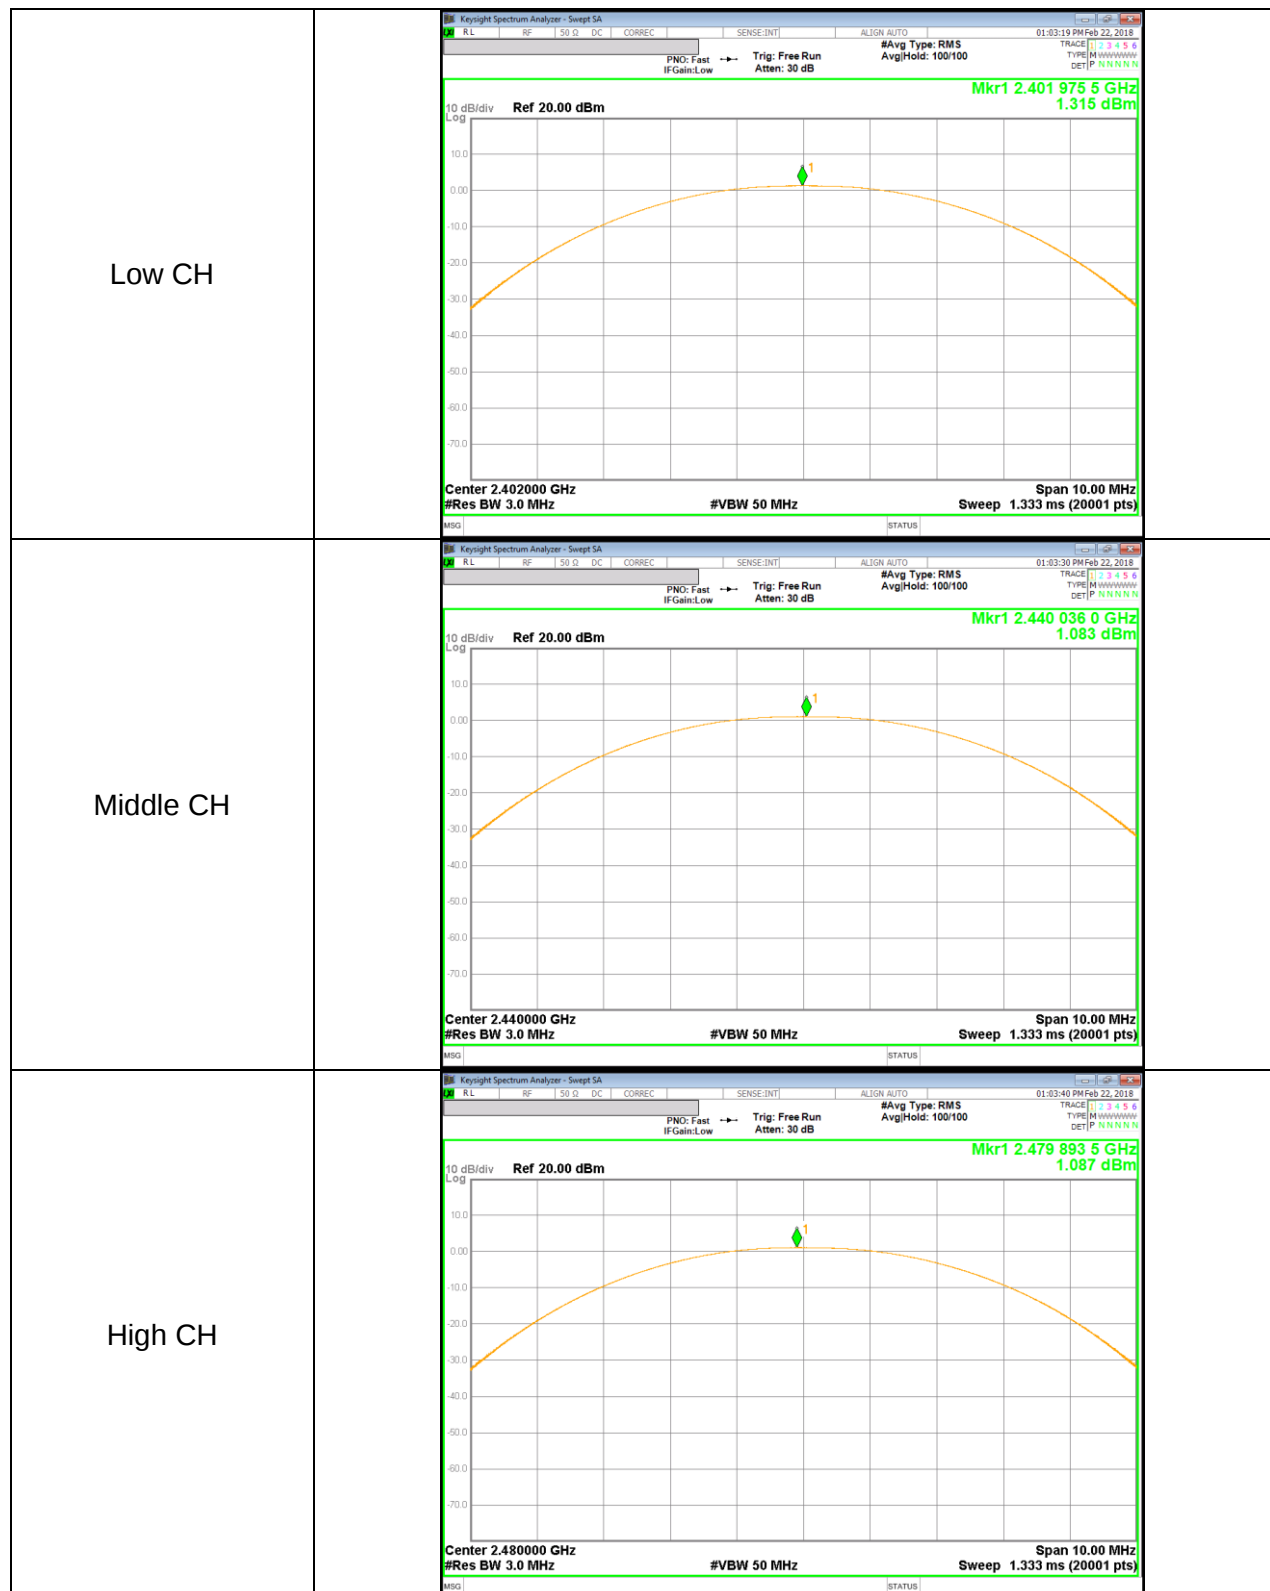

10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	1.062	1.277
Middle	2440	0.841	1.214
High	2480	0.817	1.207

10.4. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE

Power Spectral Density was performed utilizing the “§10.2 Method PKPSD (Peak PSD)” under KDB558074 D01 DTS Meas Guidance v04

RESULTS

Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
Low	2402	-14.04	8.00	-22.04
Mid	2440	-14.18	8.00	-22.18
High	2480	-14.26	8.00	-22.26

POWER SPECTRAL DENSITY PLOTS

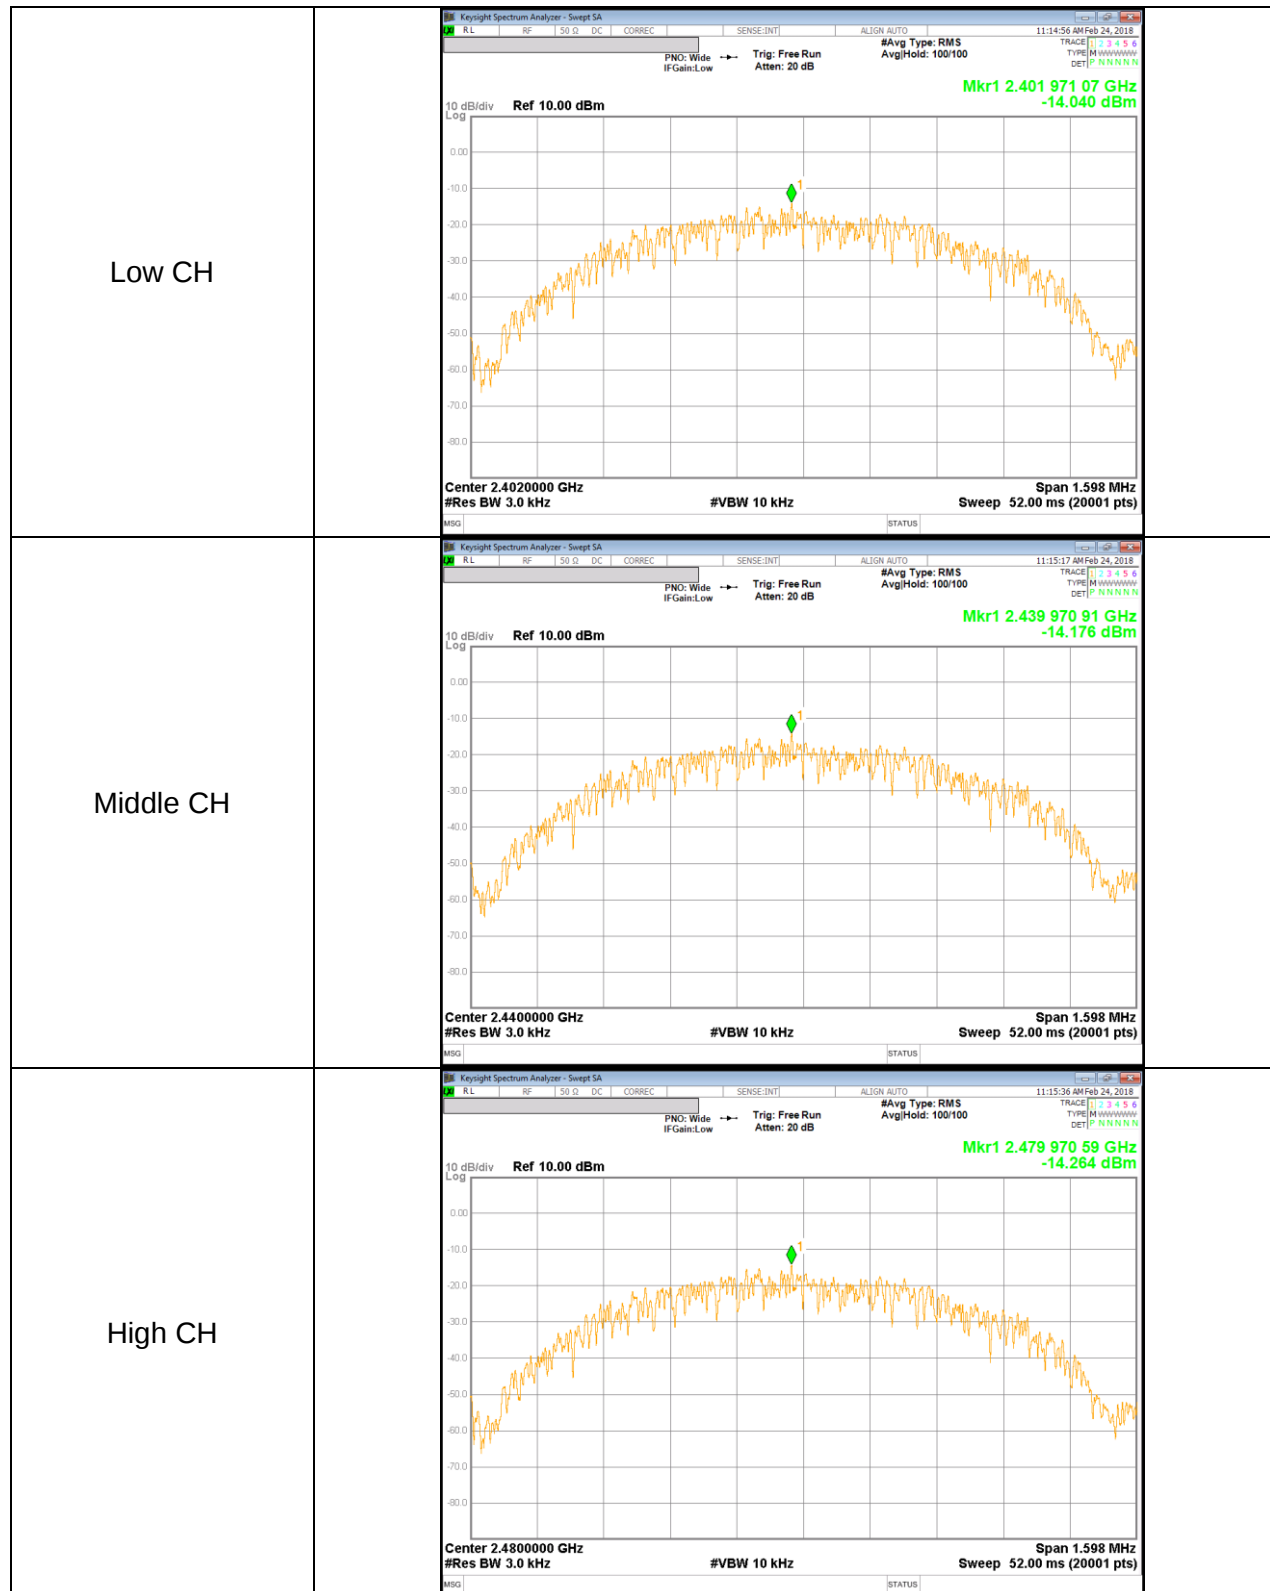

10.5. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

RESULTS


BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL

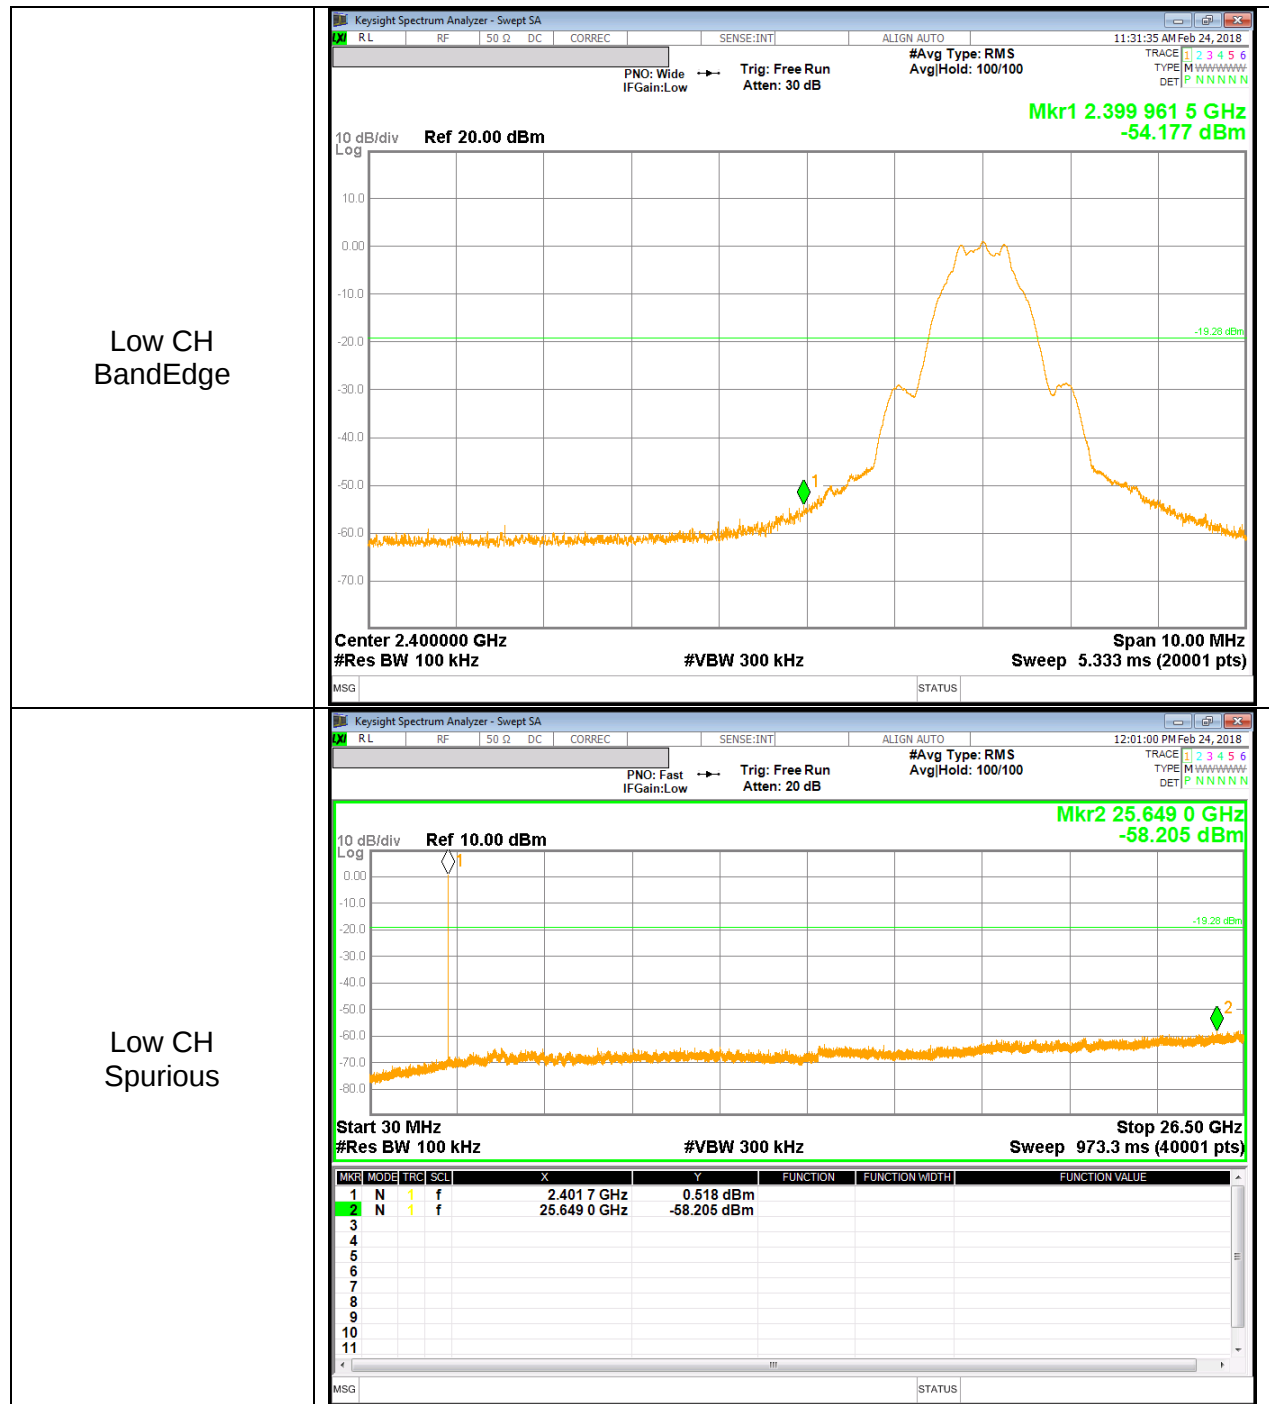

SPURIOUS EMISSIONS, MID CHANNEL

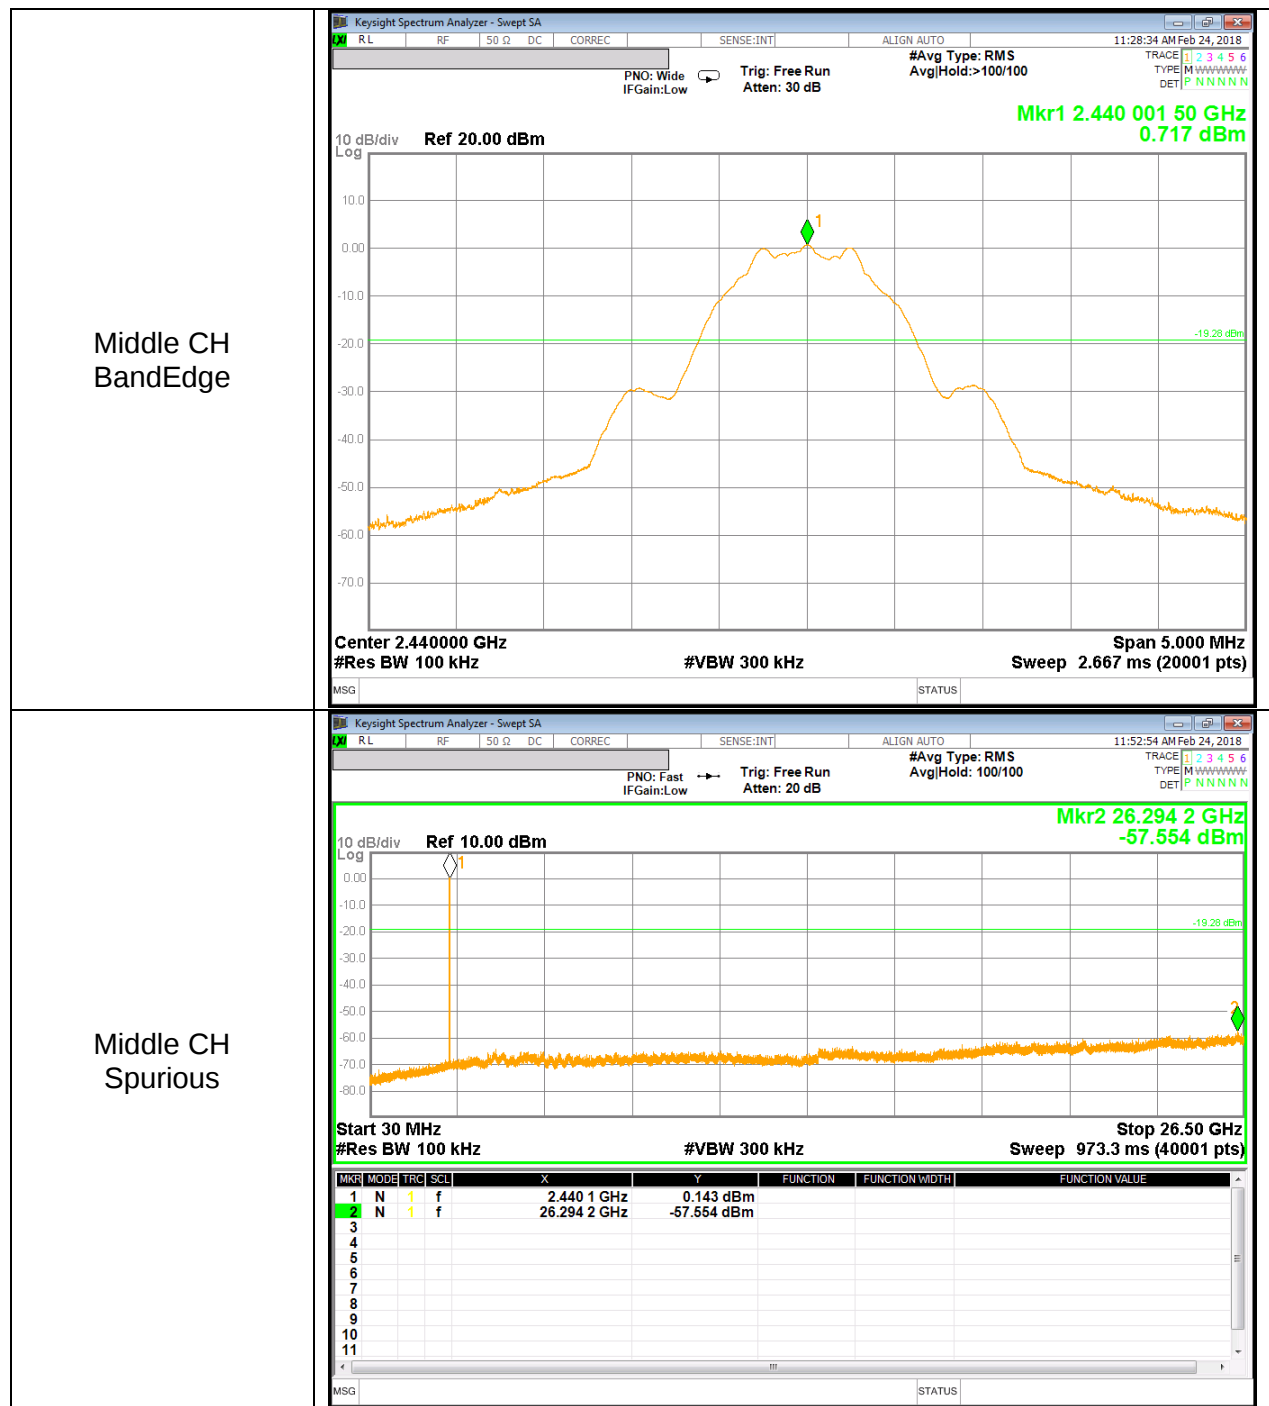

SPURIOUS EMISSIONS, HIGH CHANNEL

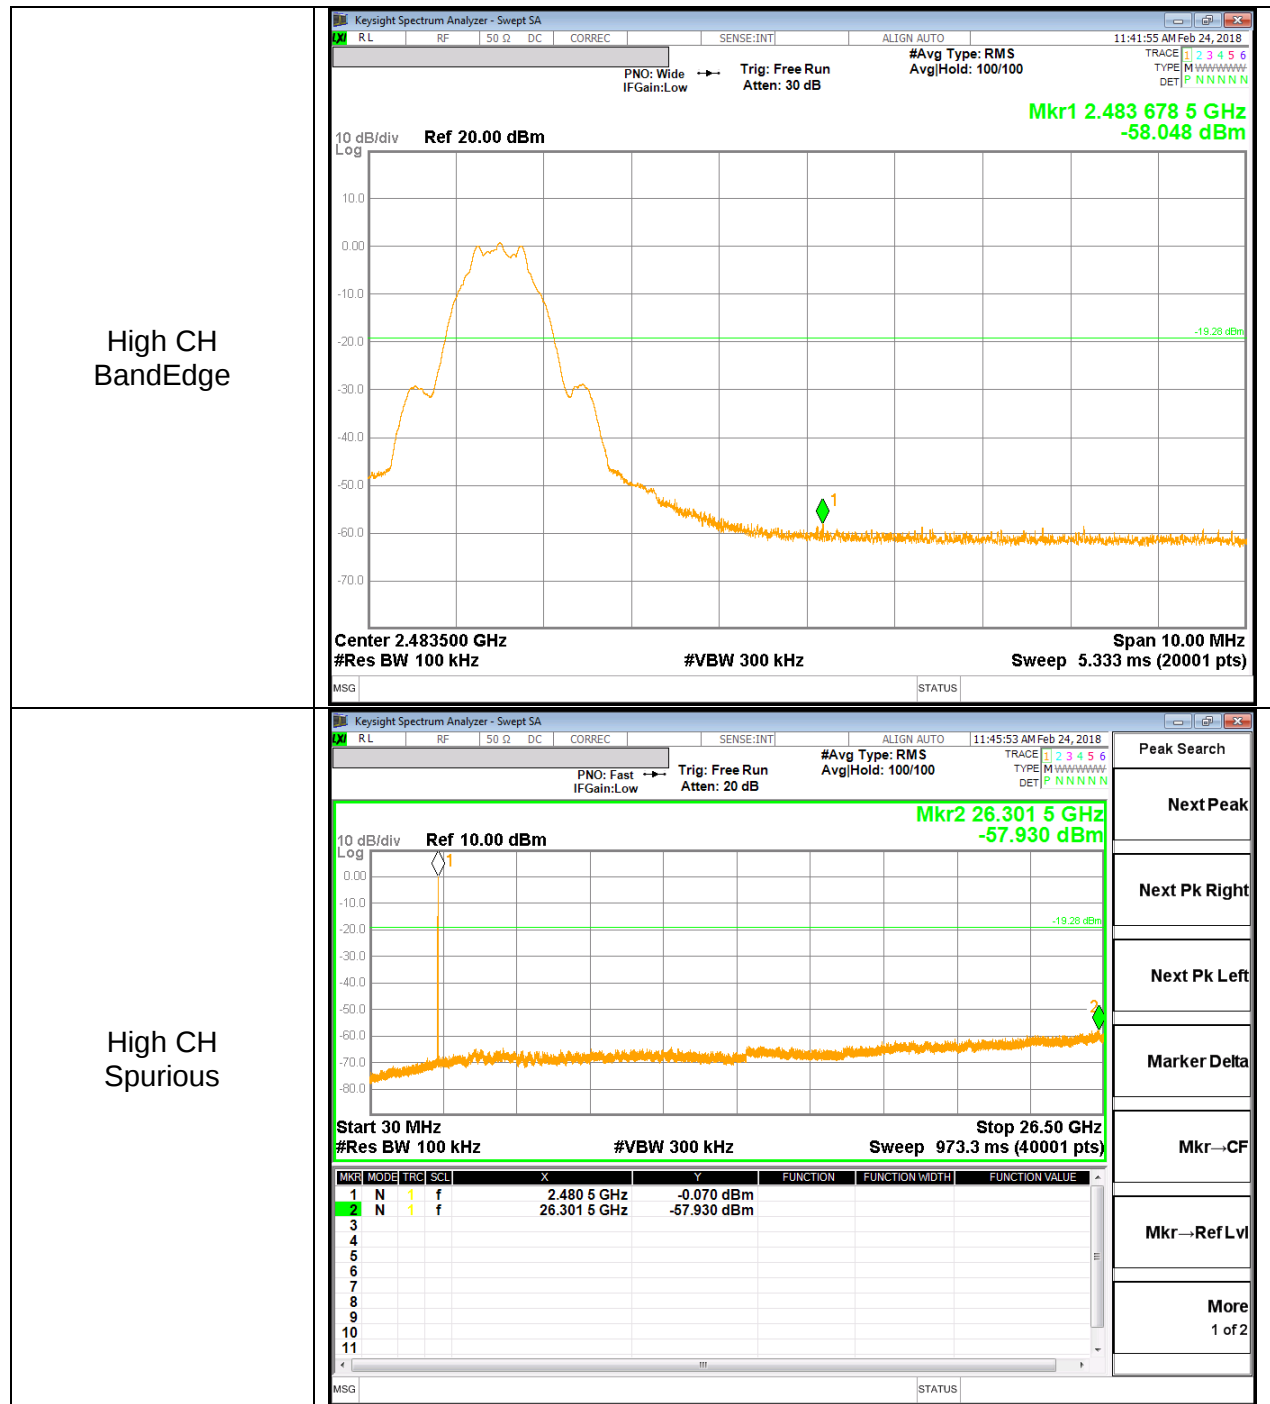

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (μV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions) Duty cycle factor = $10 \log(1/x)$. For this sample: DCF = $10 \log(1/0.623) = 2.06 \text{ dB}$ (Spectrum Analyzer round it up to 2.06dB)


Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

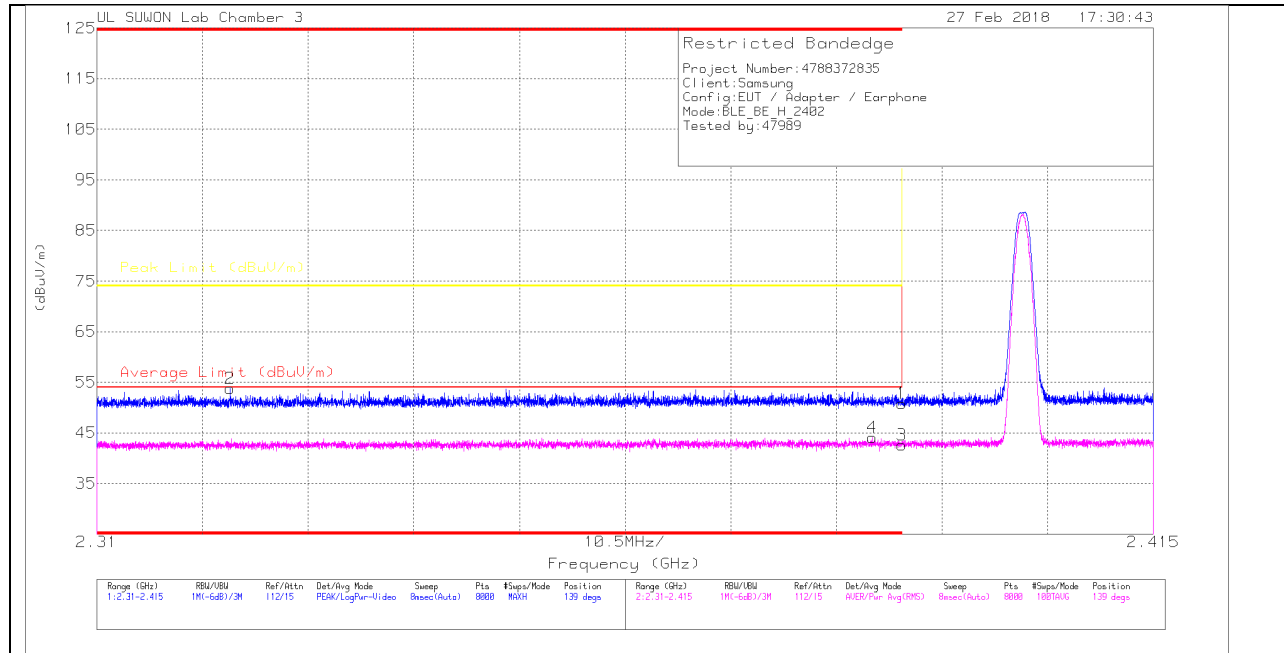

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)
1	* 2.39	42.35	Pk	31.8	-23.3	0	50.85	-	-	74	-23.15	139
2	* 2.323	45.36	Pk	31.6	-23.2	0	53.76	-	-	74	-20.24	139
3	* 2.39	32.06	RMS	31.8	-23.3	2.06	42.62	54	-11.38	-	-	139
4	* 2.387	33.49	RMS	31.8	-23.3	2.06	44.05	54	-9.95	-	-	139

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

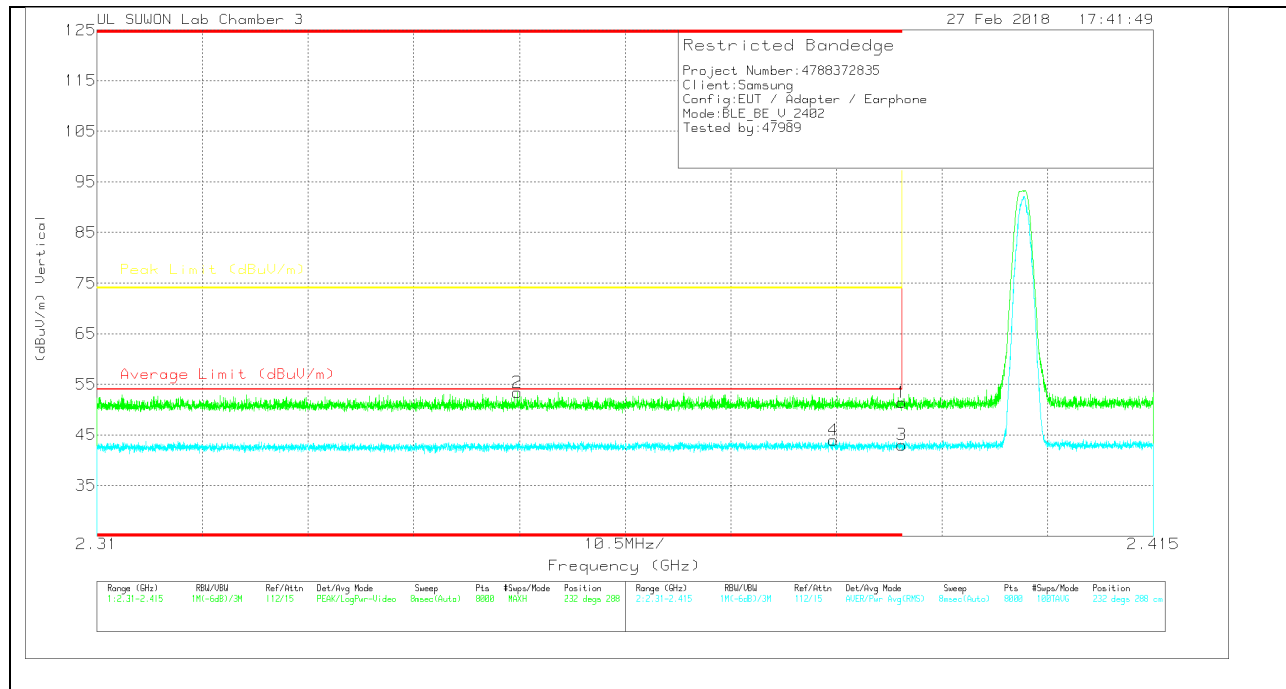

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	42.87	Pk	31.8	-23.3	0	51.37	-	-	74	-22.63	232	288	V
2	* 2.352	45.02	Pk	31.7	-23.3	0	53.42	-	-	74	-20.58	232	288	V
3	* 2.39	32.47	RMS	31.8	-23.3	2.06	43.03	54	-10.97	-	-	232	288	V
4	* 2.383	33.31	RMS	31.8	-23.2	2.06	43.97	54	-10.03	-	-	232	288	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

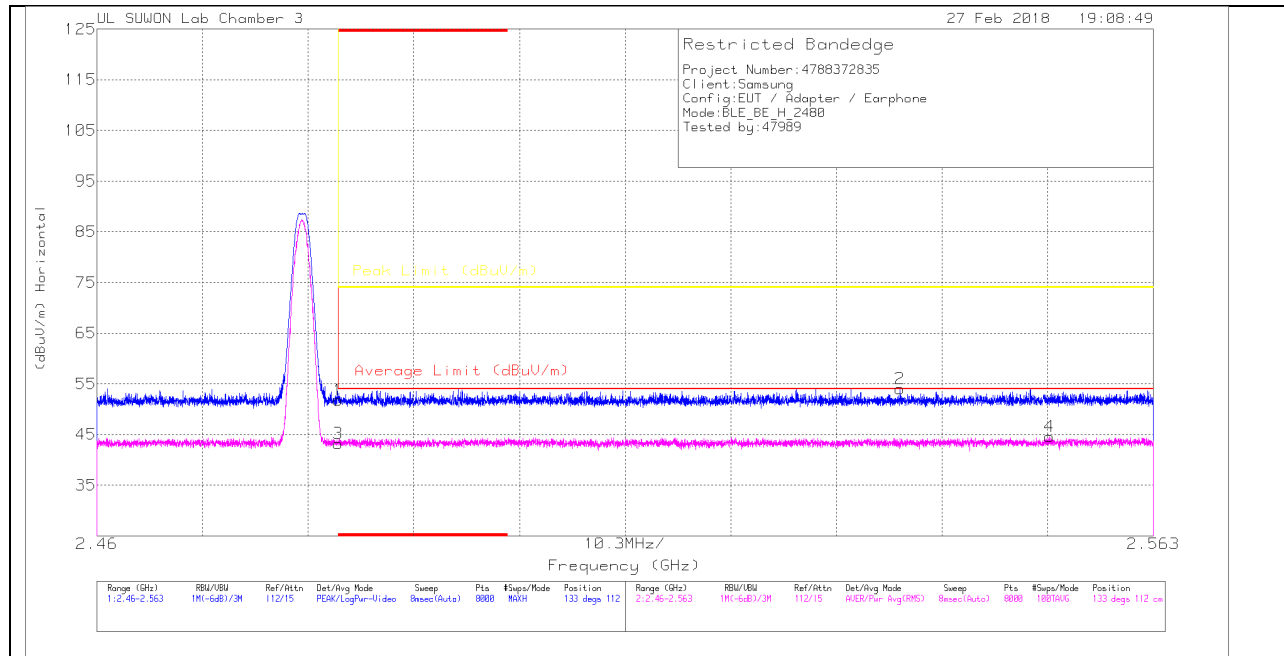

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[0020599]	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	42.69	Pk	32.1	-23	0	51.79	-	-	74	-22.21	133	112	H
2	2.538	44.94	Pk	32.1	-23	0	54.04	-	-	74	-19.96	133	112	H
3	* 2.484	32.02	RMS	32.1	-23	2.06	43.18	54	-10.82	-	-	133	112	H
4	2.553	33.4	RMS	32.1	-23	2.06	44.56	54	-9.44	-	-	133	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

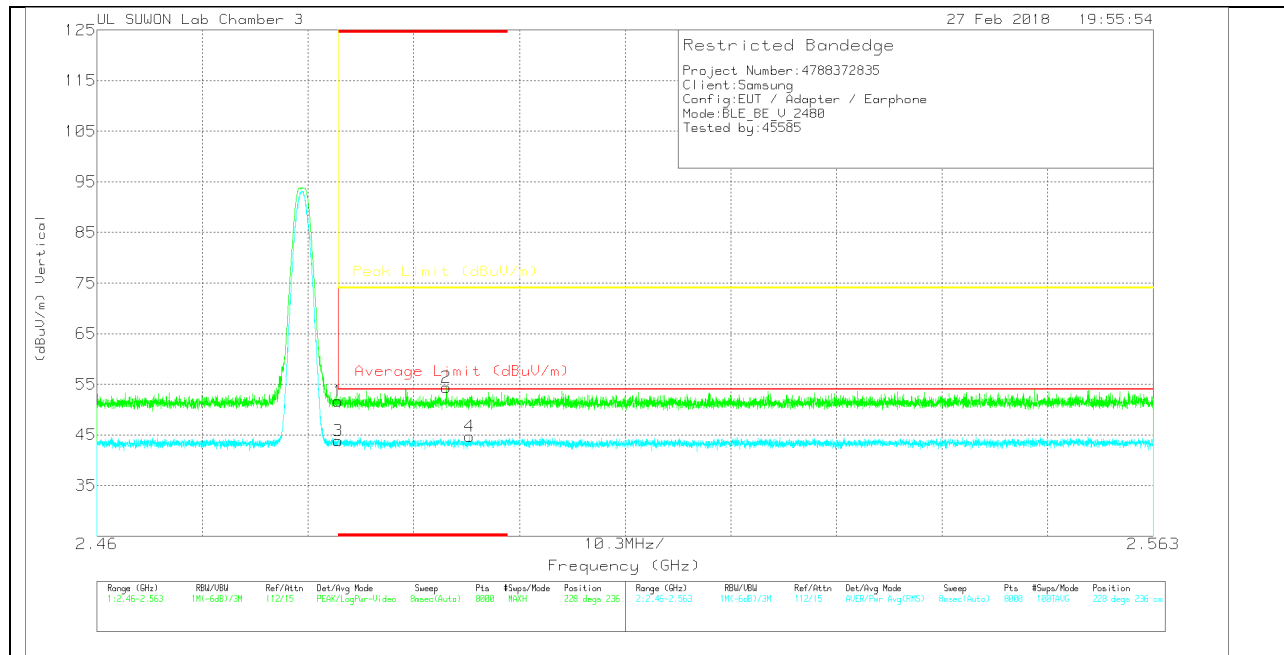

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	42.59	Pk	32.1	-23	0	51.69	-	-	74	-22.31	228	236	V
2	* 2.494	45.34	Pk	32.1	-23.1	0	54.34	-	-	74	-19.66	228	236	V
3	* 2.484	32.66	RMS	32.1	-23	2.06	43.82	54	-10.18	-	-	228	236	V
4	* 2.496	33.53	RMS	32.1	-23	2.06	44.69	54	-9.31	-	-	228	236	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

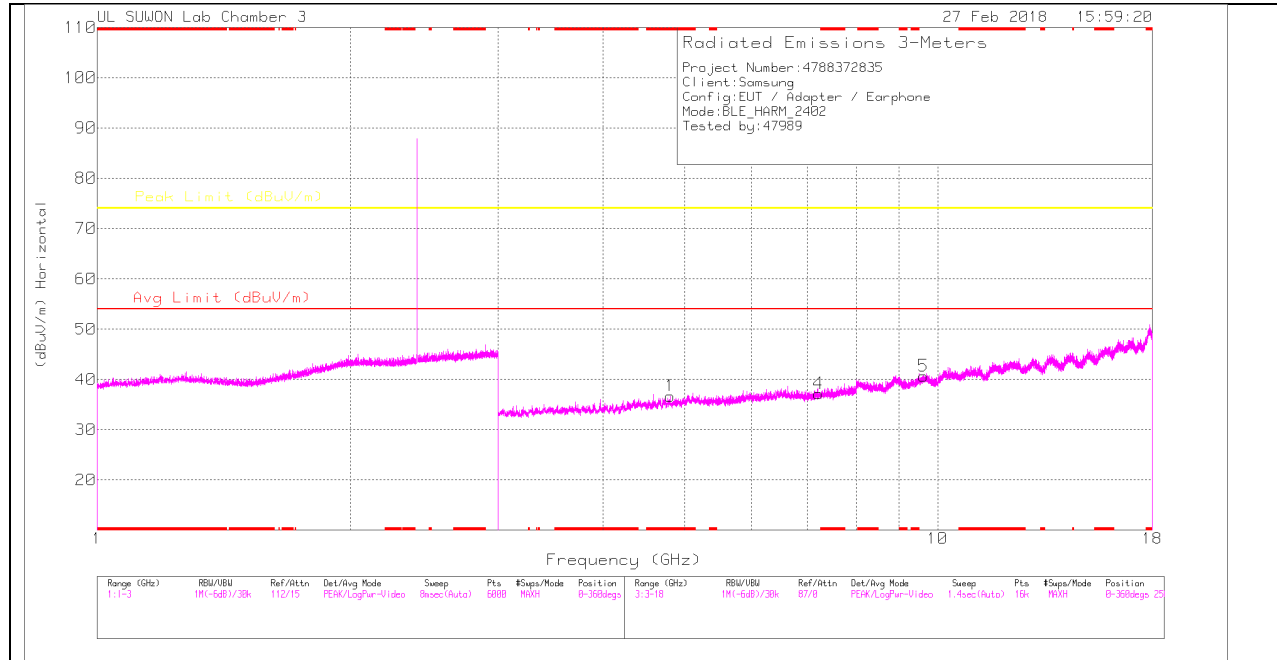

LOW CHANNEL VERTICAL

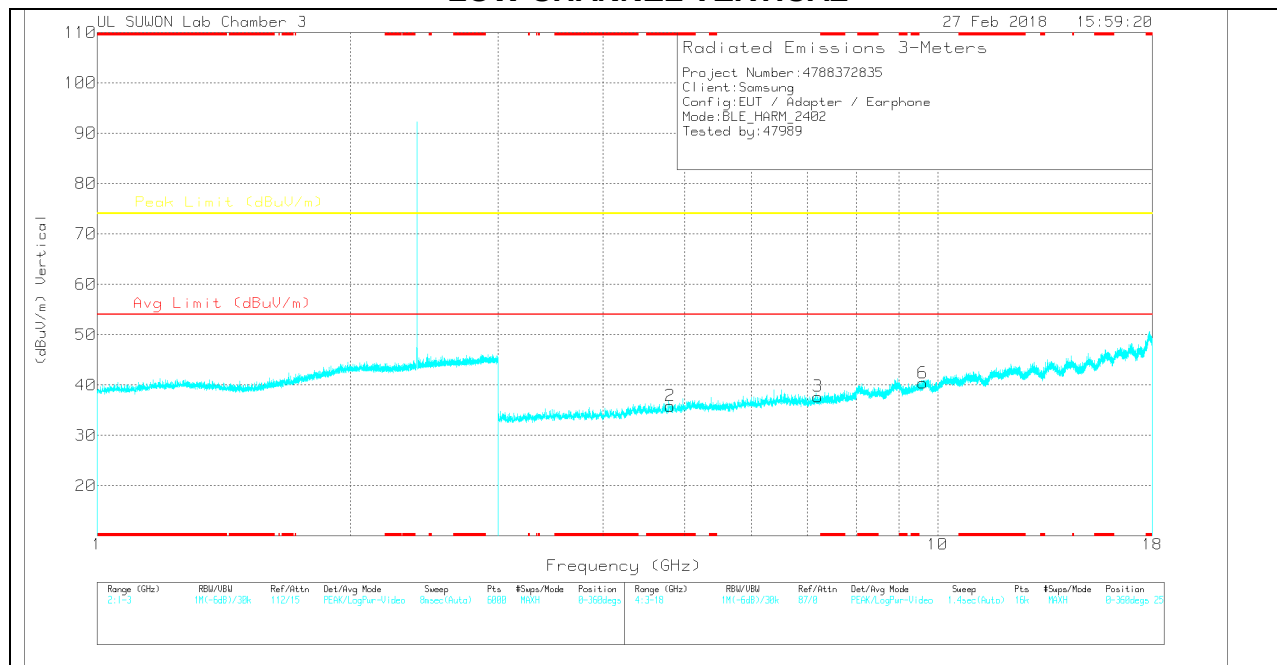

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.808	31.02	PK	33.9	-28.2	0	36.72	-	-	74	-37.28	0-360	150	H
4	7.212	25.59	PK	35.6	-24	0	37.19	-	-	74	-36.81	0-360	150	H
5	9.613	23.87	PK	36.7	-19.9	0	40.67	-	-	74	-33.33	0-360	150	H
2	* 4.805	30.15	PK	33.9	-28.2	0	35.85	-	-	74	-38.15	0-360	251	V
3	7.202	26.11	PK	35.6	-24	0	37.71	-	-	74	-36.29	0-360	149	V
6	9.606	23.59	PK	36.7	-19.9	0	40.39	-	-	74	-33.61	0-360	251	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

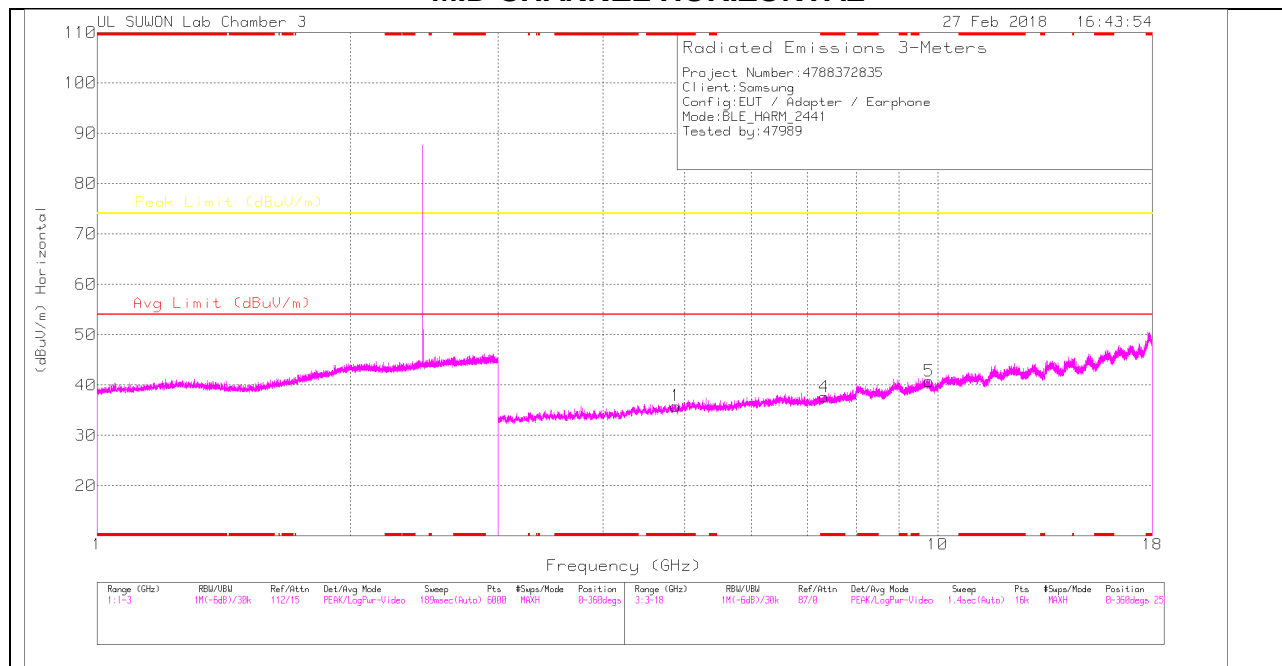

MID CHANNEL VERTICAL

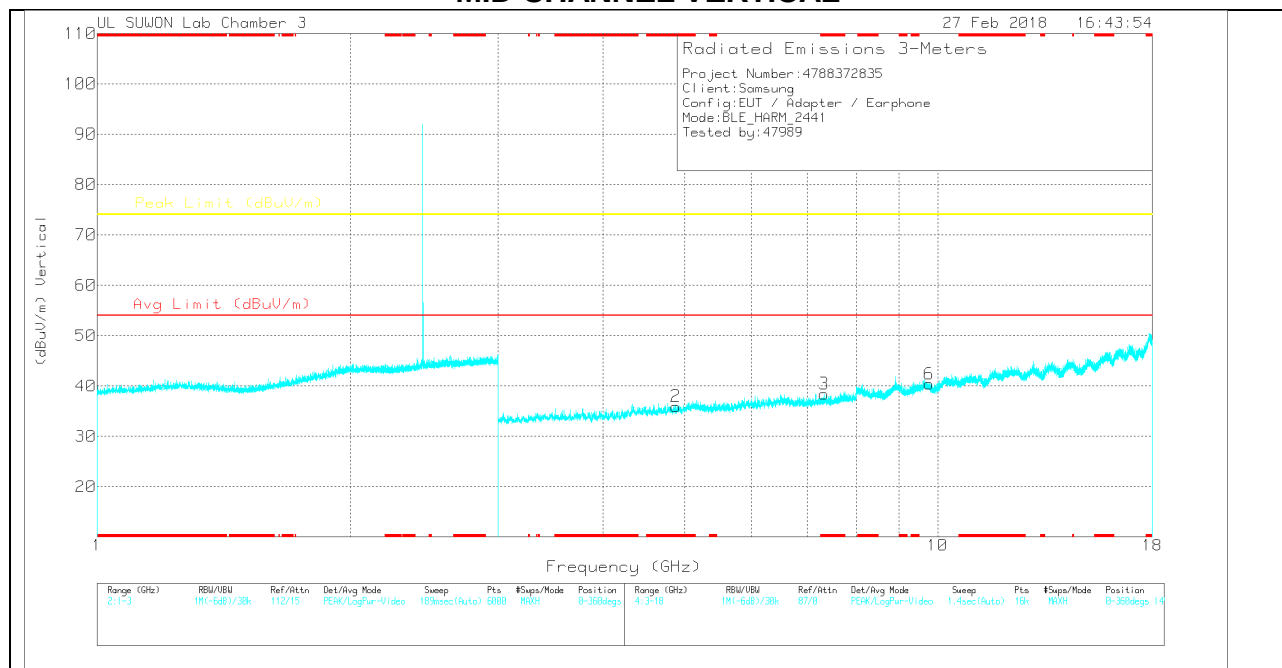

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	30.74	PK	34	-28.9	0	35.84	-	-	74	-38.16	0-360	250	H
4	* 7.33	25.33	PK	35.6	-23.3	0	37.63	-	-	74	-36.37	0-360	150	H
5	9.773	23.33	PK	36.9	-19.5	0	40.73	-	-	74	-33.27	0-360	250	H
2	* 4.884	30.85	PK	34	-28.9	0	35.95	-	-	74	-38.05	0-360	250	V
3	* 7.325	26.23	PK	35.6	-23.4	0	38.43	-	-	74	-35.57	0-360	149	V
6	9.766	23.08	PK	36.9	-19.6	0	40.38	-	-	74	-33.62	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

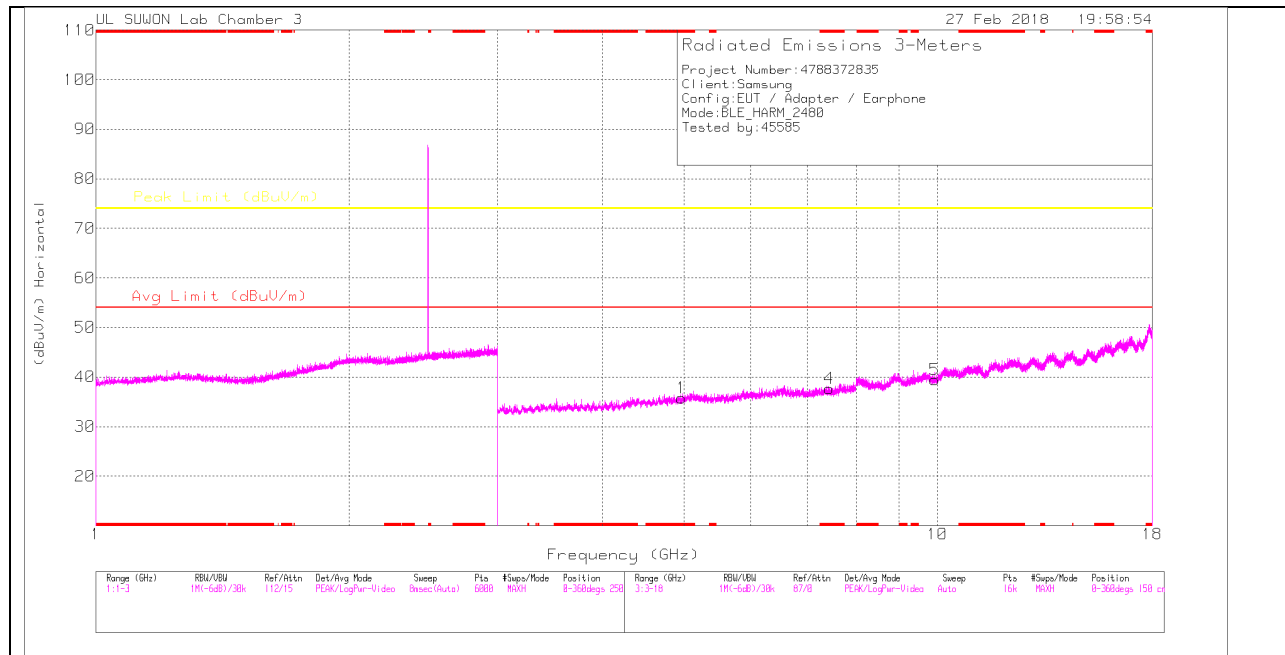

HIGH CHANNEL VERTICAL

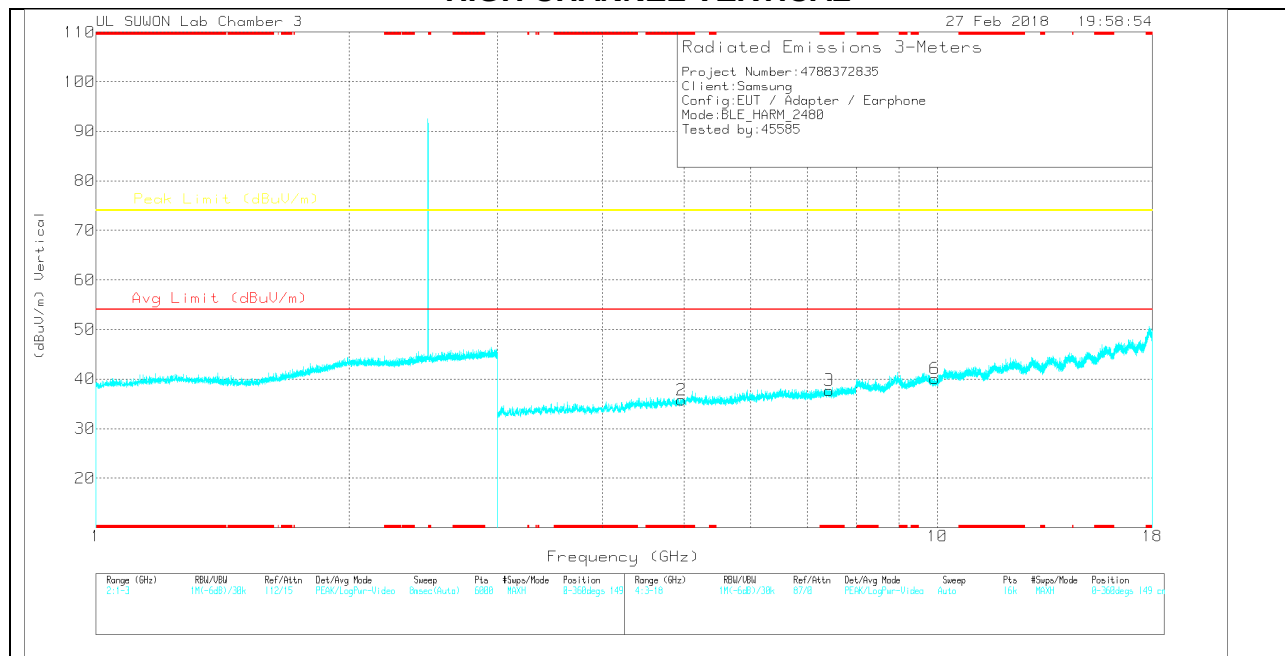

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	30.15	PK	34.1	-28.5	0	35.75	-	-	74	-38.25	0-360	150	H
4	* 7.44	25.26	PK	35.6	-23.2	0	37.66	-	-	74	-36.34	0-360	150	H
5	9.921	22.17	PK	37	-19.7	0	39.47	-	-	74	-34.53	0-360	150	H
2	* 4.96	30.18	PK	34.1	-28.5	0	35.78	-	-	74	-38.22	0-360	250	V
3	* 7.44	25.34	PK	35.6	-23.2	0	37.74	-	-	74	-36.26	0-360	250	V
6	9.92	22.75	PK	37	-19.7	0	40.05	-	-	74	-33.95	0-360	149	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

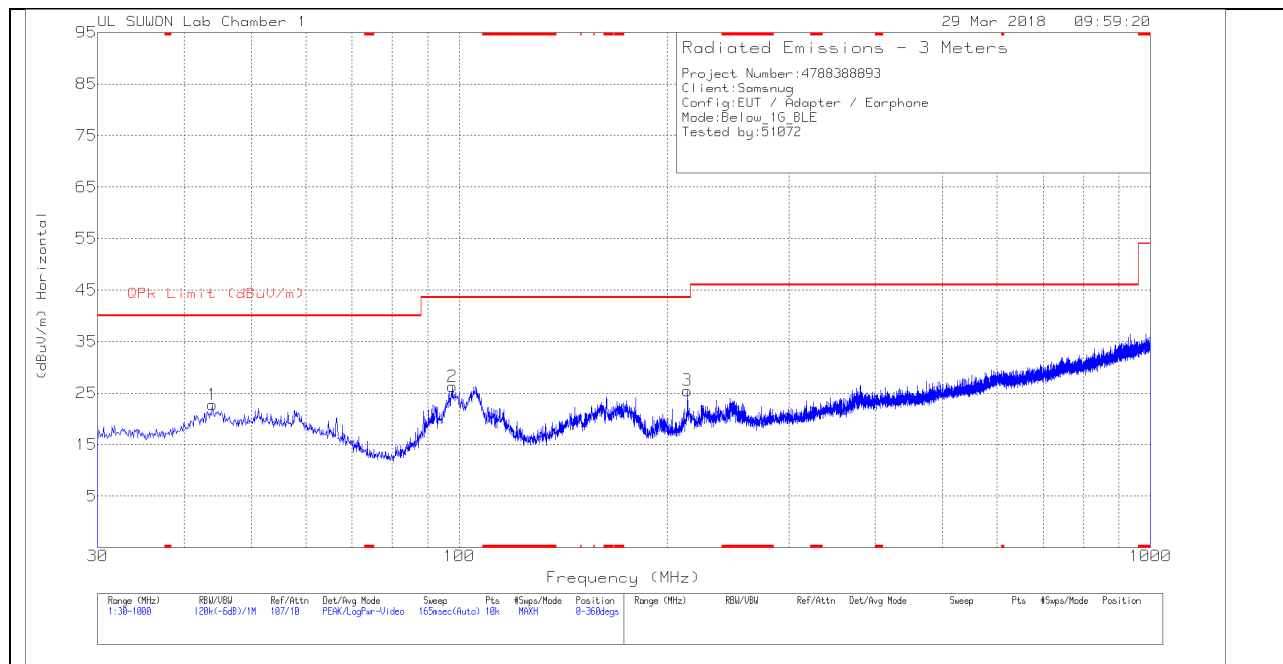

VERTICAL PLOT

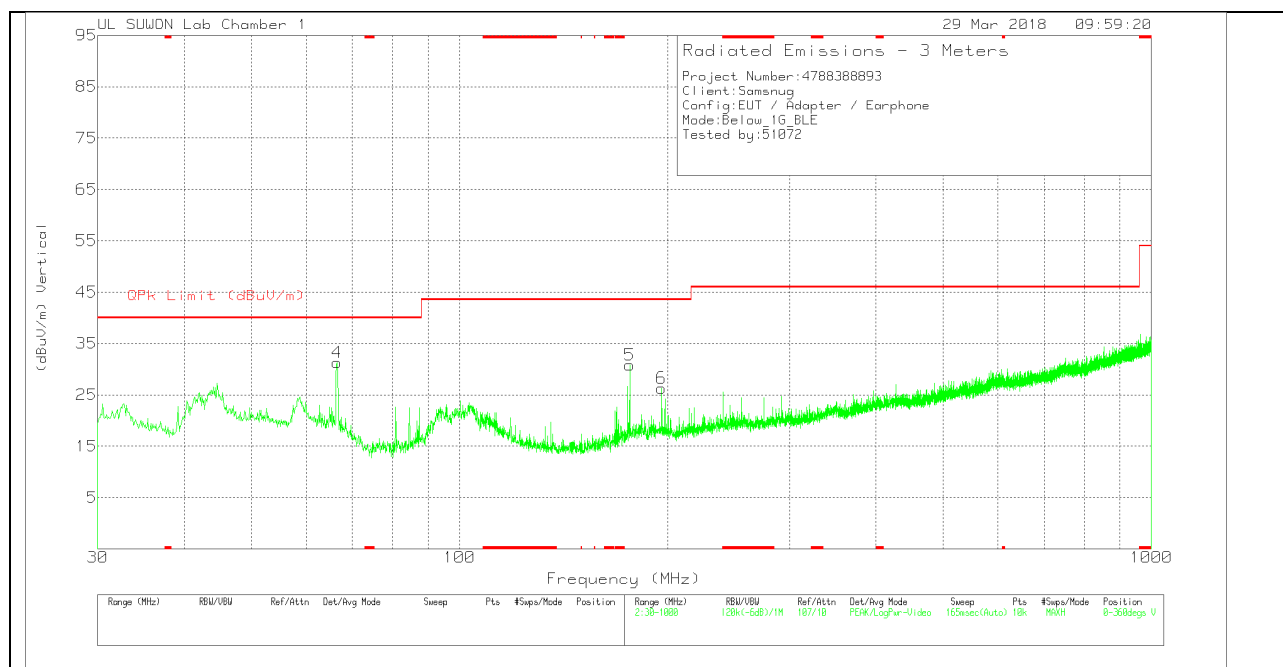

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	750_20170831	30-1000MHz[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	43.968	32.65	Pk	19.5	-29.4	0	22.75	40	-17.25	0-360	400	H
2	97.803	37.68	Pk	17.1	-28.5	0	26.28	43.52	-17.24	0-360	300	H
3	213.815	36.08	Pk	16.9	-27.5	0	25.48	43.52	-18.04	0-360	200	H
4	66.569	43.81	Pk	16.4	-28.9	0	31.31	40	-8.69	0-360	100	V
5	176.179	43.3	Pk	15.1	-27.6	0	30.8	43.52	-12.72	0-360	200	V
6	195.773	36.91	Pk	17	-27.6	0	26.31	43.52	-17.21	0-360	100	V

Pk - Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS

LINE 1 PLOT

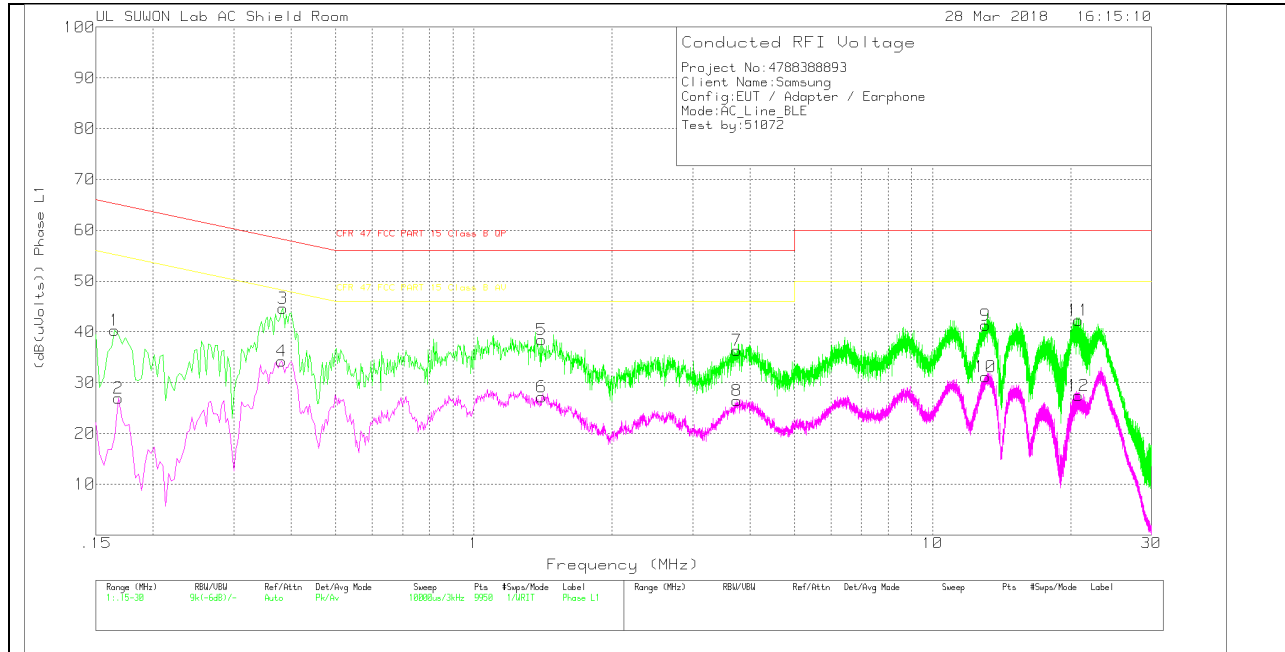

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L1_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.165	30.2	Pk	10	.1	40.3	65.21	-24.91	-	-
2	.168	16.89	Av	10	.1	26.99	-	-	55.06	-28.07
3	.384	34.77	Pk	9.7	.2	44.67	58.19	-13.52	-	-
4	.381	24.3	Av	9.7	.2	34.2	-	-	48.26	-14.06
5	1.407	28.19	Pk	9.9	.3	38.39	56	-17.61	-	-
6	1.407	16.96	Av	9.9	.3	27.16	-	-	46	-18.84
7	3.747	26.2	Pk	9.8	.3	36.3	56	-19.7	-	-
8	3.747	16.34	Av	9.8	.3	26.44	-	-	46	-19.56
9	13.056	31.13	Pk	9.8	.4	41.33	60	-18.67	-	-
10	13.053	20.97	Av	9.8	.4	31.17	-	-	50	-18.83
11	20.805	31.74	Pk	10.1	.4	42.24	60	-17.76	-	-
12	20.814	16.89	Av	10.1	.4	27.39	-	-	50	-22.61

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L1_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.16575	27.9	Qp	10	.1	38	65.17	-27.17	-	-
.16875	28.06	Qp	10	.1	38.16	65.02	-26.86	-	-
.38325	31.06	Qp	9.7	.2	40.96	58.21	-17.25	-	-
.38175	31.15	Qp	9.7	.2	41.05	58.24	-17.19	-	-
1.40775	23.24	Qp	9.9	.3	33.44	56	-22.56	-	-
3.74715	22.39	Qp	9.8	.3	32.49	56	-23.51	-	-
13.0553	27.66	Qp	9.8	.4	37.86	60	-22.14	-	-
13.0532	27.65	Qp	9.8	.4	37.85	60	-22.15	-	-
20.8052	26.55	Qp	10.1	.4	37.05	60	-22.95	-	-
20.8142	26.56	Qp	10.1	.4	37.06	60	-22.94	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

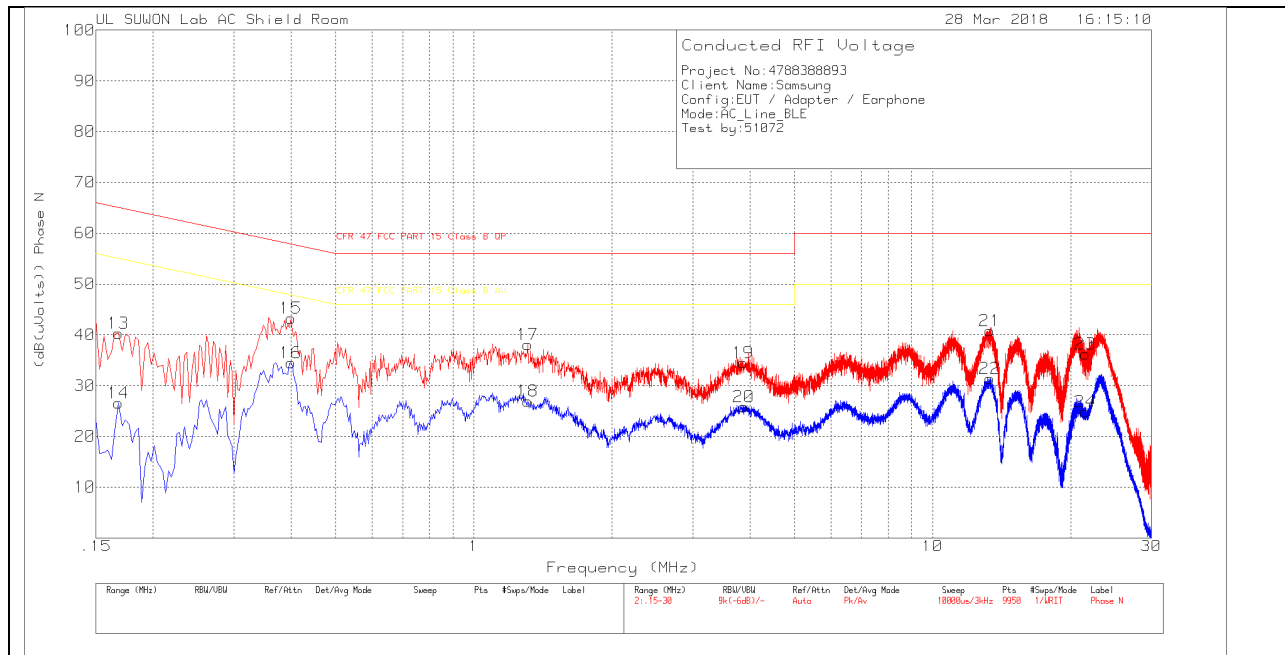

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.168	30.19	Pk	10	.1	40.29	65.06	-24.77	-	-
14	.168	16.42	Av	10	.1	26.52	-	-	55.06	-28.54
15	.399	33.27	Pk	9.8	.2	43.27	57.87	-14.6	-	-
16	.399	24.5	Av	9.8	.2	34.5	-	-	47.87	-13.37
17	1.311	27.92	Pk	9.9	.3	38.12	56	-17.88	-	-
18	1.311	16.72	Av	9.9	.3	26.92	-	-	46	-19.08
19	3.87	24.36	Pk	9.8	.3	34.46	56	-21.54	-	-
20	3.876	15.7	Av	9.8	.3	25.8	-	-	46	-20.2
21	13.323	30.62	Pk	9.8	.4	40.82	60	-19.18	-	-
22	13.323	21.2	Av	9.8	.4	31.4	-	-	50	-18.6
23	21.54	25.67	Pk	10.1	.4	36.17	60	-23.83	-	-
24	21.54	14.28	Av	10.1	.4	24.78	-	-	50	-25.22

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.16875	28.87	Qp	10	.1	38.97	65.02	-26.05	-	-
.39825	29.79	Qp	9.8	.2	39.79	57.89	-18.1	-	-
1.31175	23	Qp	9.9	.3	33.2	56	-22.8	-	-
3.87075	21.09	Qp	9.8	.3	31.19	56	-24.81	-	-
3.87525	20.87	Qp	9.8	.3	30.97	56	-25.03	-	-
13.3223	26.96	Qp	9.8	.4	37.16	60	-22.84	-	-
21.5393	22.54	Qp	10.1	.4	33.04	60	-26.96	-	-

Qp - Quasi-Peak detector