



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART M

WWAN

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER : SM-A6050, SM-A6058, SM-A605XC

FCC ID: A3LSMA6050

REPORT NUMBER: 4788388893-E7V1

ISSUE DATE: APR 24, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	04/24/18	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.4. WORST-CASE ORIENTATION	12
5.5. DESCRIPTION OF TEST SETUP	12
6. TEST AND MEASUREMENT EQUIPMENT	14
7. Summary Table	15
8. PEAK TO AVERAGE RATIO	17
8.1. CONDUCTED PEAK TO AVERAGE RESULT	17
8.2. CONDUCTED PEAK TO AVERAGE PLOTS	19
9. LIMITS AND CONDUCTED RESULTS	23
9.1. OCCUPIED BANDWIDTH	23
9.1.1. OCCUPIED BANDWIDTH RESULTS	23
9.1.2. OCCUPIED BANDWIDTH PLOTS	27
9.2. BAND EDGE EMISSIONS	39
9.2.1. BAND EDGE PLOTS	46
9.2.2. EMISSION MASK PLOTS	52
9.3. OUT OF BAND EMISSIONS	56
9.3.1. OUT OF BAND EMISSIONS PLOTS	60
9.4. FREQUENCY STABILITY	72
9.4.1. FREQUENCY STABILITY RESULTS	73

10.	RADIATED TEST RESULTS	79
10.1.	<i>RADIATED POWER (ERP & EIRP).....</i>	79
10.1.1.	ERP/EIRP Results.....	80
10.1.2.	ERP/EIRP DATA.....	83
10.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	95
10.2.1.	SPURIOUS RADIATION PLOTS.....	96
11.	SETUP PHOTOS	108

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER: SM-A6050, SM-A6058, SM-A605XC

SERIAL NUMBER: R38K108QG5F, R38K104R4WF(RADIATED, Original);
R38K104QAPL (CONDUCTED, Original);
R38K1200N9FF, R38K200N9ZP (RADIATED, Spot check & additional test)
R38K200N9FF (Conducted, Additional test)

DATE TESTED: FEB 22, 2018 - MAR 19, 2018 (Original)
MAR 24, 2018 - APR 02, 2018 (Spot check, Spot check & additional test)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E and 27M	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMA605FN WWAN(FCC CFR 47 Part 22/24). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMA6050 shares the same enclosure and circuit board as FCC ID: A3LSMA605FN. The WWAN antennas and surrounding circuitry and layout regarding test data re-used bands are identical between these two units. The FCC ID: A3LSMA6050, some components for additional band newly mounted and additional bands enabled by SW. Difference for these two units, PED document described in details.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA605FN remains representative of FCC ID: A3LSMA6050. The test data of FCC ID: A3LSMA605FN being submitted for this application to cover WWAN re-used bands features.

- Reuse bands - GSM850, GSM1900, WCDMA Band 5, WCDMA Band 2, LTE Band 5
- Additional test band for FCC ID : A3LSMA6050 - LTE Band 41.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Worst Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-A605FN/DS Results	SM-A6050 Results		
					FCC ID : A3LSMA605FN	FCC ID : A3LSMA6050		
GSM850	ERP	GPRS	836.6 MHz	38.50 dBm	27.04 dBm	26.78 dBm	-0.26 dB	Spot check data measured on low Ch.
	RSE	GPRS	1697.6 MHz	-13.00 dBm	-34.10 dBm	-34.00 dBm	0.10 dB	
GSM1900	EIRP	GPRS	1880 MHz	33.00 dBm	29.66 dBm	28.82 dBm	-0.84 dB	
	RSE	GPRS	7520 MHz	-13.00 dBm	-43.80 dBm	-43.50 dBm	0.30 dB	
WCDMA Band 2	EIRP	REL99	1852.4 MHz	33.00 dBm	21.40 dBm	21.04 dBm	-0.36 dB	
	RSE	HSDPA	7630 MHz	-13.00 dBm	-48.00 dBm	-45.10 dBm	2.90 dB	
WCDMA Band 5	ERP	REL99	826.4 MHz	38.50 dBm	17.93 dBm	17.73 dBm	-0.20 dB	
	RSE	REL99	3305.6 MHz	-13.00 dBm	-50.20 dBm	-50.70 dBm	-0.50 dB	
LTE Band 5	EIRP	3M QPSK	825.5 MHz	38.50 dBm	16.45 dBm	15.54 dBm	-0.91 dB	
	RSE	1.4M 16QAM	1696.6 MHz	-13.00 dBm	-46.20 dBm	-47.40 dBm	-1.20 dB	

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
DTS	A3LSMA605FN	Grant	4788372835-E1V2	Test	FCC Report DTS WLAN / All sections (Except section 11.3 and 12)
			4788372835-E2V2	Test	FCC Report BLE All sections (Except section 11.3 and 12)
DSS	A3LSMA605FN	Grant	4788372835-E3V2	Test	FCC Report BT / All sections (Except section 11.3 and 12)
NII	A3LSMA605FN	Grant	4788372835-E4V3	Test	FCC Report UNII WLAN / All sections (Except section 12 and 13)
DXX	A3LSMA605FN	Grant	4788372835-E5V2	Test	FCC Report ANT+ / All sections (Except section 7.2.5 and 8)
			4788372835-E6V3		FCC Report NFC / All sections (Except section 8.1.3 and 9)
PCE	A3LSMA605FN	Grant	4788372835-E7V2	Test	FCC Report WWAN / All sections (Except conducted Output power)

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 22.
3. FCC CFR 47 Part 24.
4. FCC CFR 47 Part 27.
5. ANSI TIA-603-E, 2016
6. KDB 971168 D01 Power Meas License Digital Systems v03

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1
☒	Chamber 2
☒	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n and ANT+ and NFC.
This test report addresses the WWAN operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted and radiated ERP / EIRP output powers as follows:

Note : Conducted output power results were excerpted from RF exposure test report.(4788388893-S1 FCC Report SAR)

GSM

FCC Part 22/24						
Band	Frequency Range	Modulation	Conducted		Radiated	
	[MHz]	Peak	Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
GSM850	824~849	GMSK	33.9	2454.71		
		GPRS	33.8	2398.83	27.04	505.82
		EGPRS	27.0	501.19	20.78	119.67
GSM1900	1850~1910	GMSK	30.5	1122.02		
		GPRS	30.3	1071.52	29.66	924.70
		EGPRS	25.7	371.54	26.30	426.58

WCDMA

FCC Part 22/24						
Band	Frequency Range	Modulation	Conducted		Radiated	
	[MHz]	Peak	Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	824~849	REL99	24.1	257.04	17.93	62.09
		HSDPA	23.1	204.17	17.43	55.34
		HSUPA	23.1	204.17		
		DC-HSDPA	23.1	204.17		
Band 2	1850~1910	REL99	23.6	229.09	21.40	138.04
		HSDPA	22.6	181.97	20.43	110.41
		HSUPA	22.6	181.97		
		DC-HSDPA	22.6	181.97		

LTE Band 5

FCC Part 22							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation Peak	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	824 ~ 849	10	QPSK	24.7	295.12	16.32	42.85
			16QAM	23.8	239.88	15.50	35.48
		5	QPSK	24.4	275.42	16.08	40.55
			16QAM	23.9	245.47	15.07	32.14
		3	QPSK	24.4	275.42	16.45	44.16
			16QAM	23.9	245.47	15.42	34.83
		1.4	QPSK	24.4	275.42	13.98	25.00
			16QAM	23.7	234.42	13.14	20.61

LTE Band 41

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation Peak	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 41	2555~2655	20	QPSK	24.5	281.84	20.29	106.91
			16QAM	23.4	218.78	19.29	84.92
		15	QPSK	24.5	281.84	20.14	103.28
			16QAM	23.5	223.87	19.06	80.54
		10	QPSK	24.5	281.84	20.42	110.15
			16QAM	23.5	223.87	19.68	92.90
		5	QPSK	24.3	269.15	20.63	115.61
			16QAM	23.3	213.80	20.07	101.62

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a internal antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850 / WCDMA Band 5 / LTE Band 5 824 ~ 849 MHz	-4.45
GSM1900 / WCDMA Band 2 1850 ~ 1910 MHz	-2.78
LTE Band 41 2555 ~ 2655 MHz	-2.68

5.4. WORST-CASE ORIENTATION

For GSM1900/WCDMA Band 2, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

For GSM850/WCDMA Band 5 / LTE Band 5 / LTE Band 41, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note : All radiated spurious tests were performed connected with earphone and charger for evaluation of worst case mode.(For erp/eirp tests, the EUT didn't connected with earphone and charger)

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50CBC	DK5J808HS/A- E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

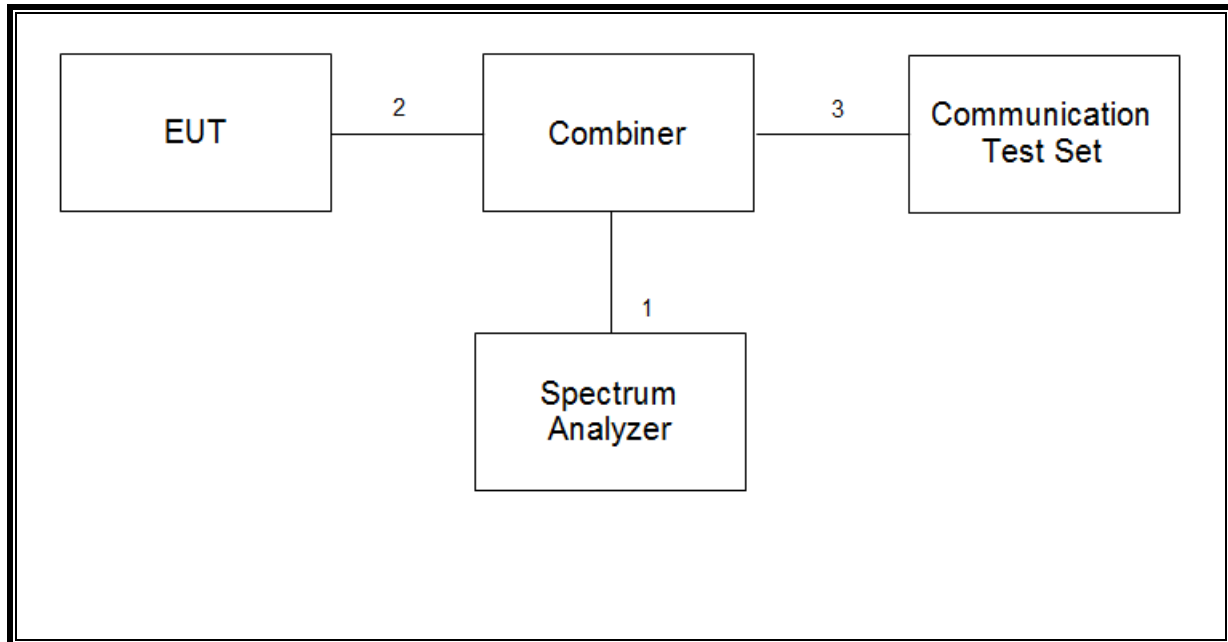

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

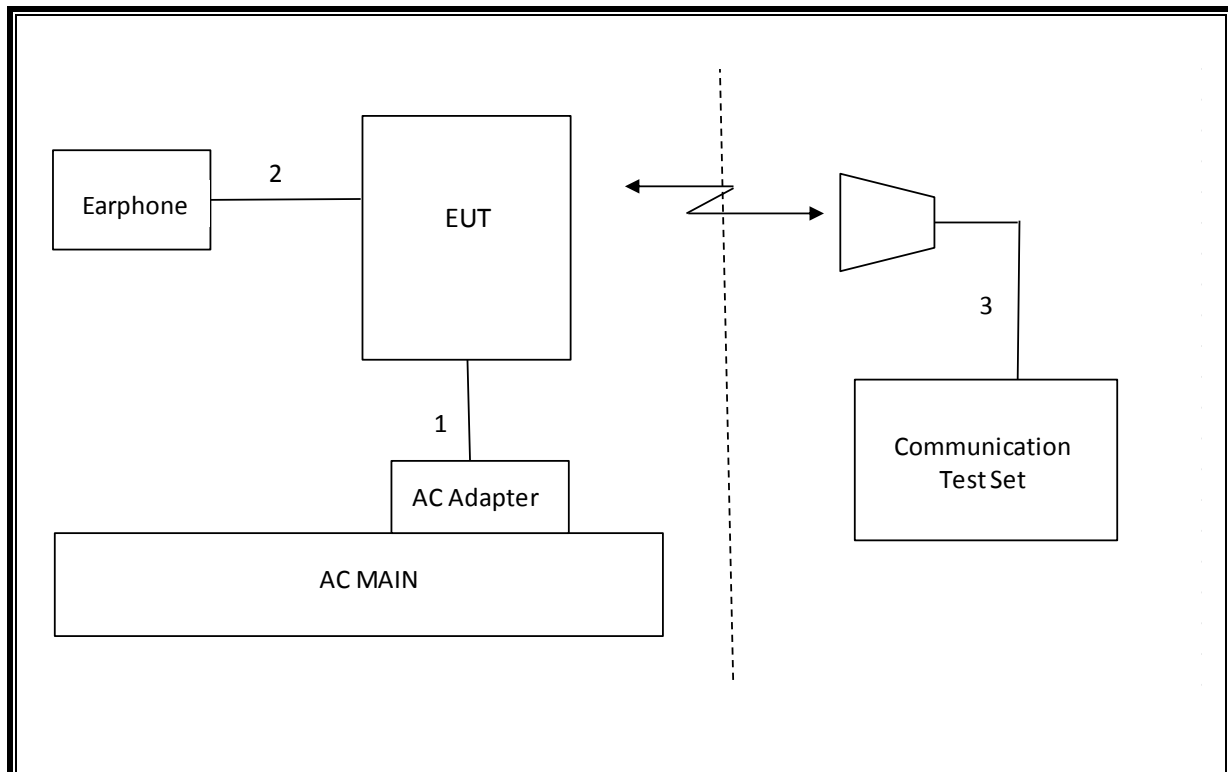

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	06-30-19
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Preamplifier	ETS	3116C-PA	00168841	11-13-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Combiner	WEINSCHTEL	1575	2152	08-08-18
Communications Test Set	R&S	CMW500	115331	08-07-18
DC Power Supply	Agilent / HP	E3640A	MY54226395	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW40	101590	08-09-18
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G005	08-09-18
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G006	08-08-18
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	010	08-09-18
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	011	08-08-18
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G001	08-09-18
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G002	08-08-18
Attenuator	PASTERNAK	PE7087-10	A009	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
Attenuator	PASTERNAK	PE7395-10	A011	02-12-19
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
Temperature Chamber	ESPEC	SH-642	93001109	08-08-18
UL Software				
Description	Manufacturer	Model	Version	
Antenna port test software	UL	CLT	Ver 2.4	

7. Summary Table

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass
22.917(a) 24.238(a)	Band Edge / Conducted Spurious Emission	-13dBm		Pass
27.53(m)	Conducted Spurious Emission	-25dBm		Pass
27.53(m)	Emission Mask	Section 9.2		Pass
2.1046	Conducted output power	N/A		Pass
22.355 24.235 27.54	Frequency Stability	2.5PPM		Pass
22.913(a)(2)	Effective Radiated Power	38.5 dBm	Radiated	Pass
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power	33dBm		Pass
22.917(a) 24.238(a)	Radiated Spurious Emission	-13dBm		Pass
27.53(m)	Radiated Spurious Emission	-25dBm		Pass

FCC Rule Part	Frequency Range [MHz]	Output Power [W]	Frequency Tolerance	Emission Designator	Emission Bandwidth [MHz]	Communication Type
GSM						
22H	824.2 - 848.8	0.506	2.5 ppm	246KGXW		GSM850
22H	824.2 - 848.8	0.120	2.5 ppm	255KG7W		EDGE850
24E	1850.2 - 1909.8	0.925	2.5 ppm	248KGXW		GSM1900
24E	1850.2 - 1909.8	0.427	2.5 ppm	246KG7W		EDGE1900
WCDMA						
22H	826.4 - 846.6	0.062	2.5 ppm	4M13F9W		WCDMA B5
24E	1852.4 - 1907.6	0.138	2.5 ppm	4M16F9W		WCDMA B2
LTE Band 5						
22H	829.0 - 844.0	0.043	2.5 ppm	8M97G7W	10	QPSK
22H	829.0 - 844.0	0.035	2.5 ppm	8M97D7W	10	16QAM
22H	825.5 - 847.5	0.044	2.5 ppm	2M69G7W	3	QPSK
LTE Band 41						
27M	2565.0 - 2645.0	0.107	2.5 ppm	17M9G7W	20	QPSK
27M	2565.0 - 2645.0	0.085	2.5 ppm	17M9D7W	20	16QAM
27M	2557.5 - 2652.5	0.116	2.5 ppm	4M50G7W	5	QPSK
27M	2557.5 - 2652.5	0.102	2.5 ppm	4M49D7W	5	16QAM

8. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v03;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

8.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
GSM850	190	836.6	GPRS	0.38	13.00
			EGPRS	3.45	
GSM1900	661	1880.0	GPRS	0.41	
			EGPRS	3.52	

WCDMA

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 5	4183	836.6	REL99	2.93	13.00
			HSDPA	3.08	
Band 2	9400	1880.0	REL99	2.89	
			HSDPA	3.04	

LTE Band 5


Band	BW [MHz]	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 5	10	20525	836.5	QPSK	3.54	13.00
				16QAM	4.29	
	5			QPSK	3.51	
				16QAM	4.27	
	3			QPSK	3.49	
				16QAM	4.32	
	1.4			QPSK	3.48	
				16QAM	4.34	

LTE Band 41


Band	BW [MHz]	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 41	20	40740	2605.0	QPSK	4.27	13.00
				16QAM	5.28	
	15			QPSK	4.25	
				16QAM	5.62	
	10			QPSK	4.35	
				16QAM	5.53	
	5			QPSK	4.18	
				16QAM	5.26	

8.2. CONDUCTED PEAK TO AVERAGE PLOTS


GSM

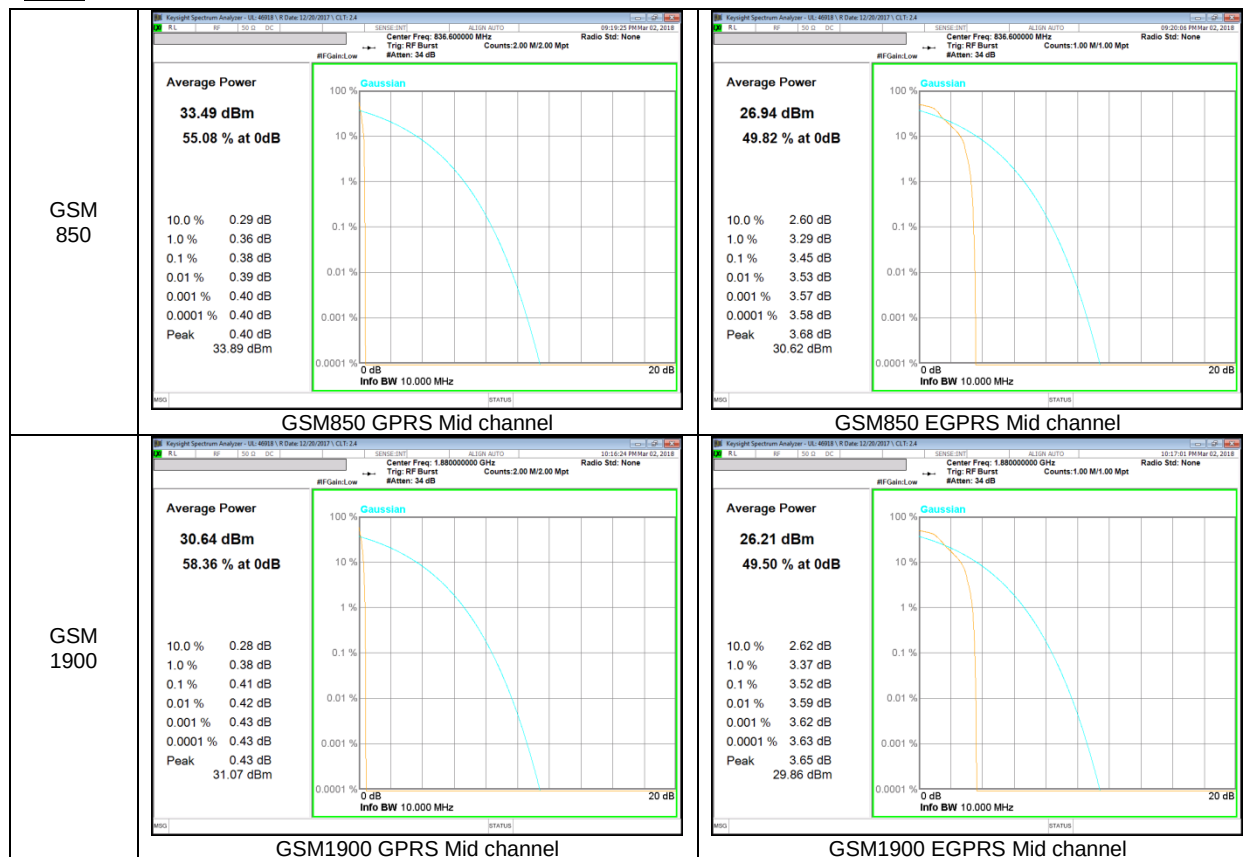


WCDMA

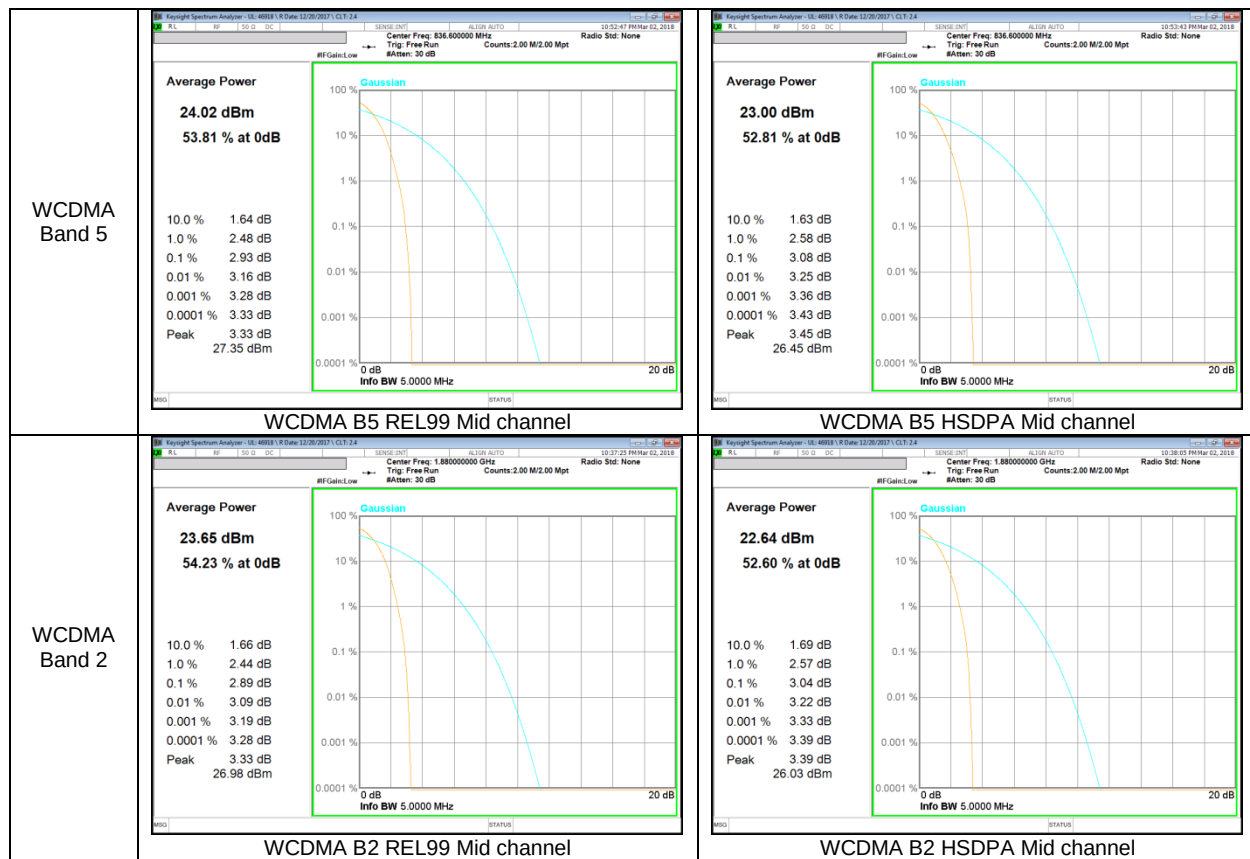

LTE Band 5

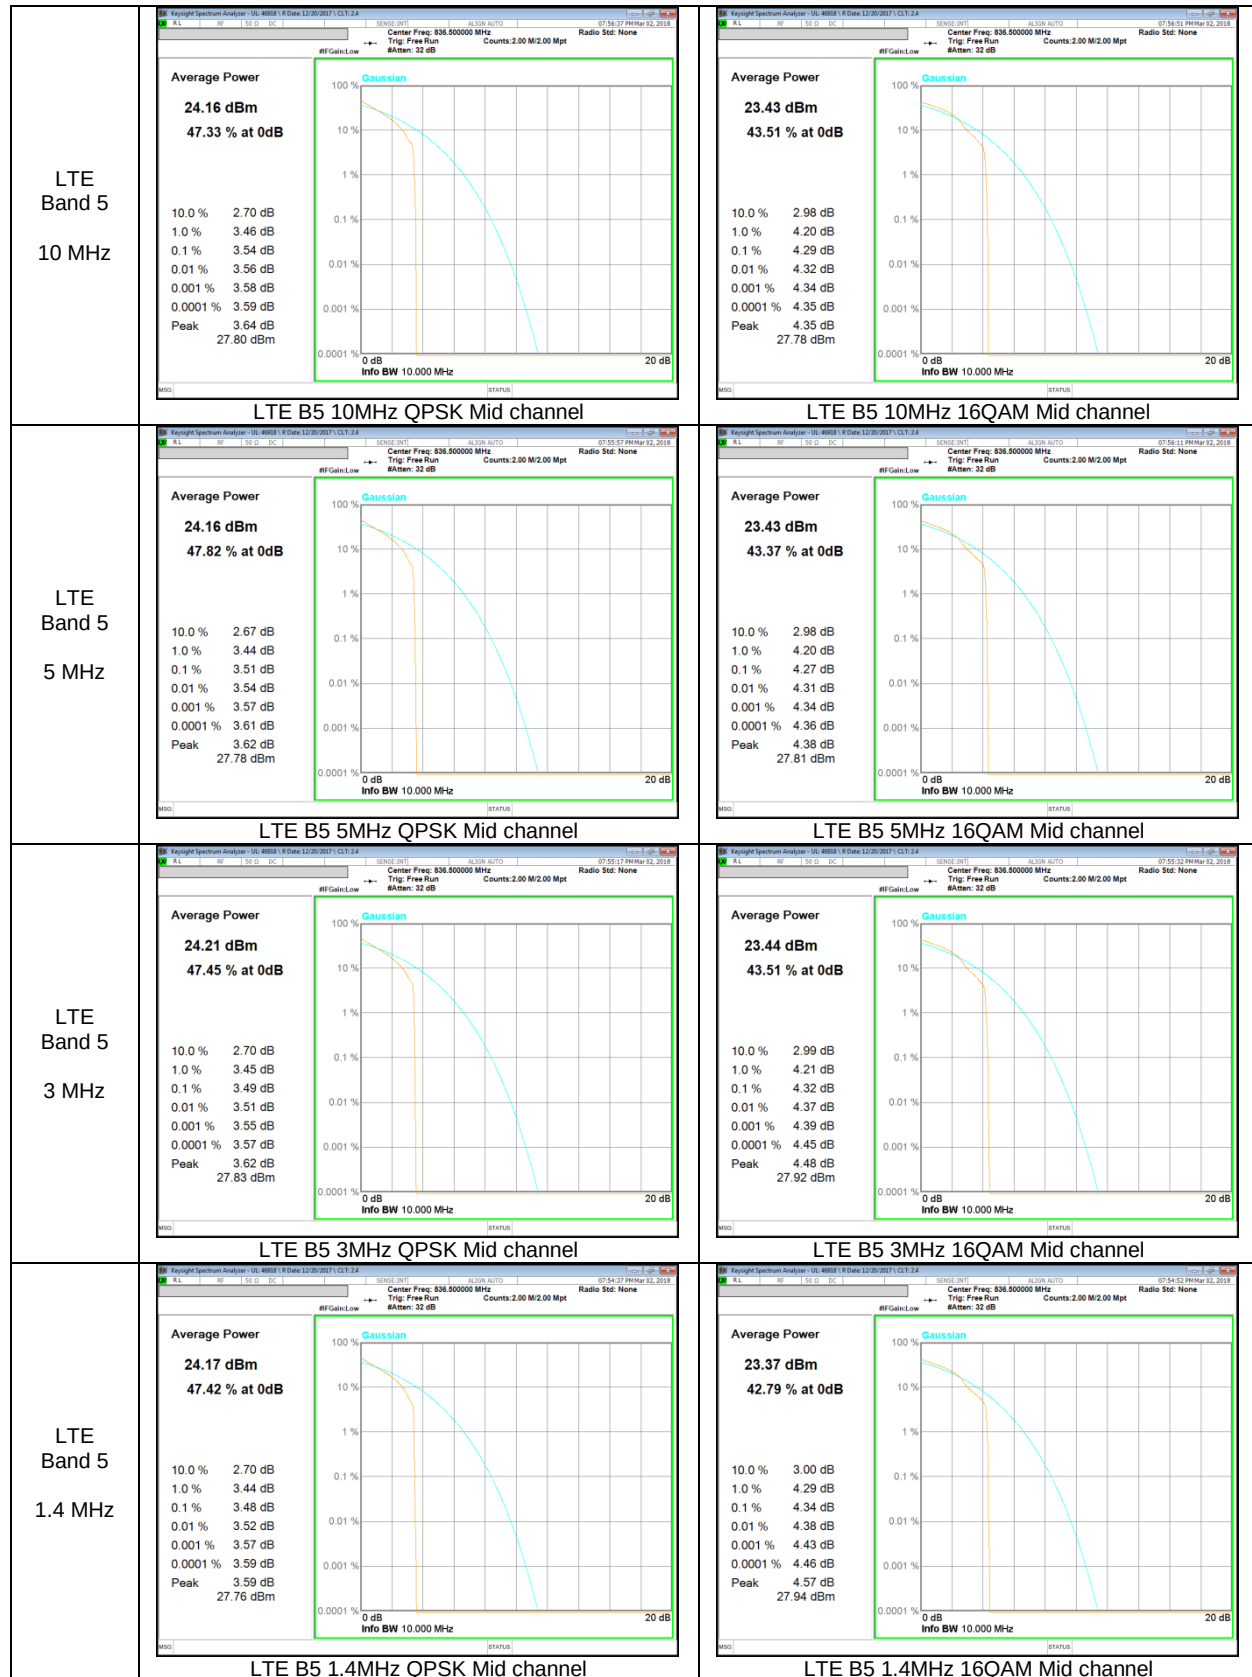

LTE Band 41

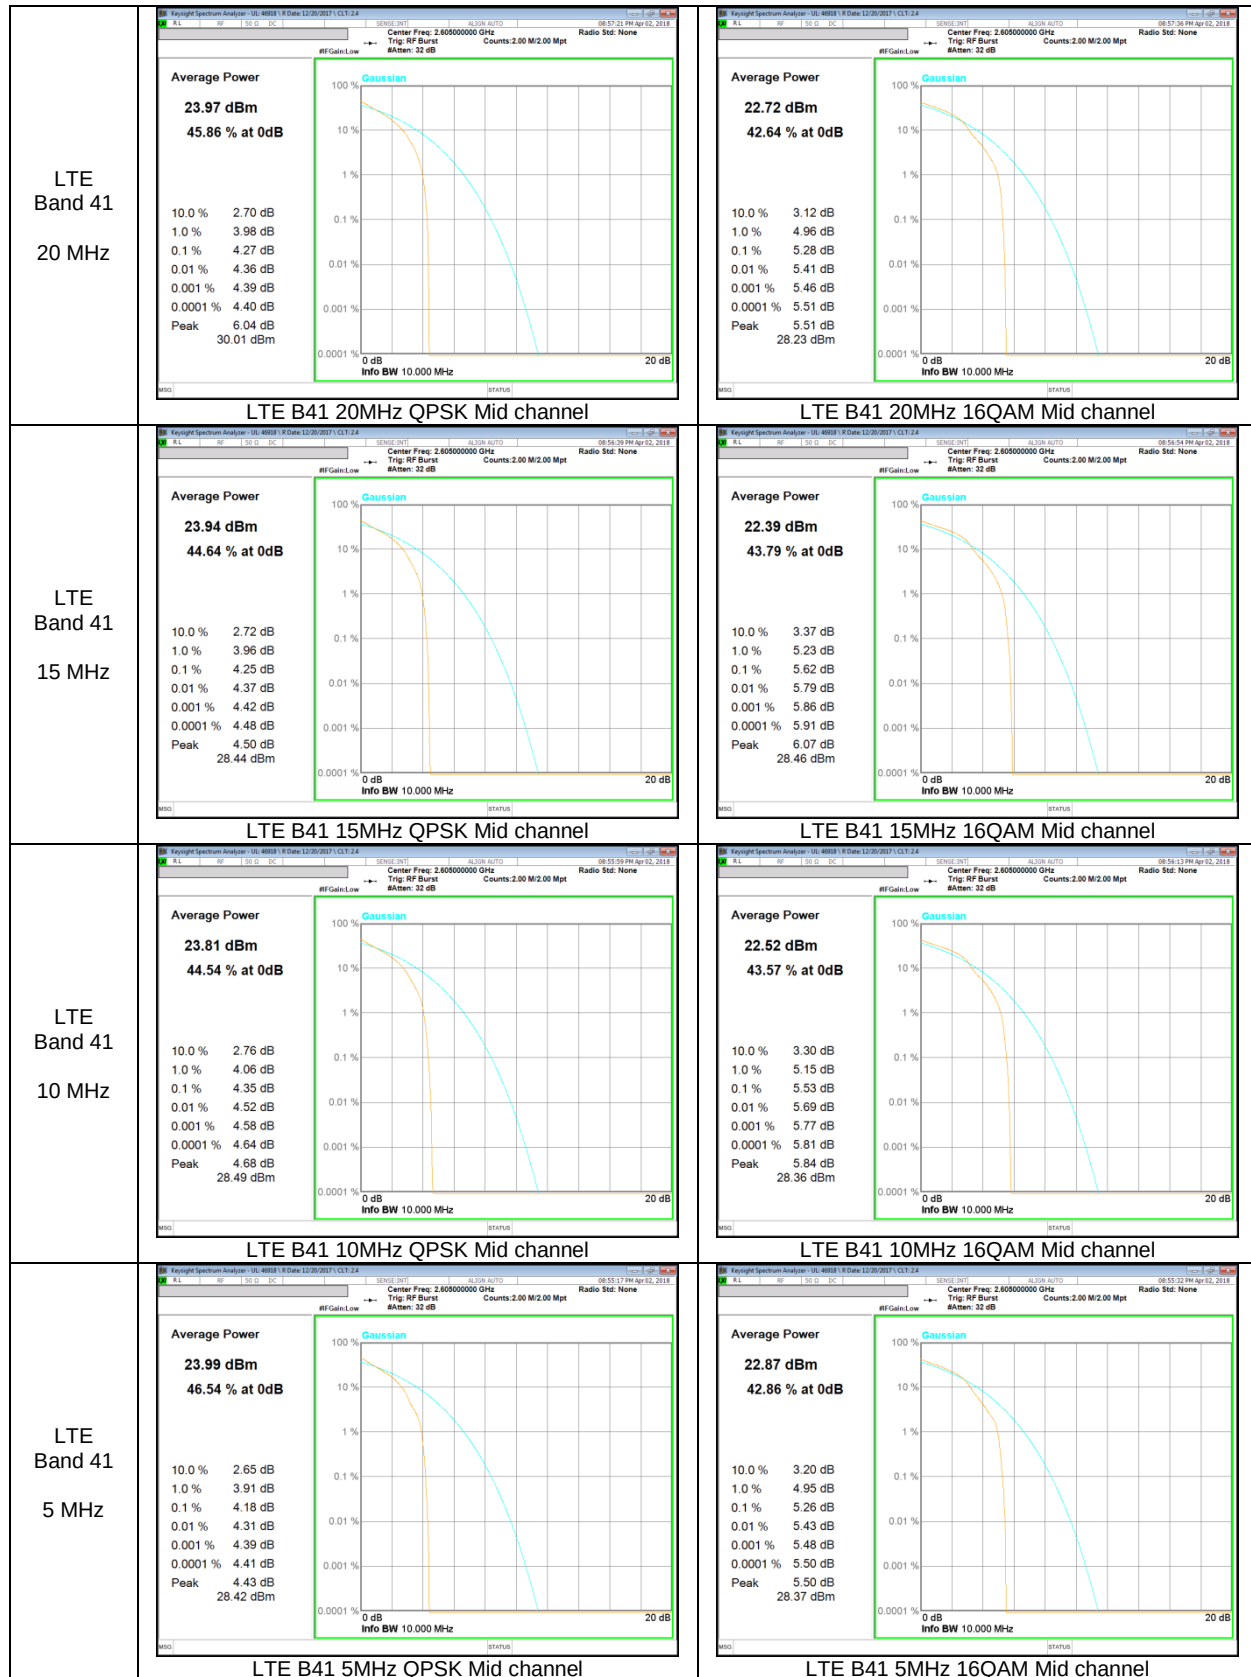

9. LIMITS AND CONDUCTED RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v03)

9.1.1. OCCUPIED BANDWIDTH RESULTS

GSM

Band	Mode	Channel	f [MHz]	99% BW [KHz]	26dB BW [KHz]
GSM850	GPRS	128	824.2	244.47	315.1
		190	836.6	245.59	326.2
		251	848.8	241.08	316.9
	EGPRS	128	824.2	255.07	319.0
		190	836.6	238.34	302.6
		251	848.8	245.21	296.3
GSM1900	GPRS	512	1850.2	242.43	315.3
		661	1880.0	248.32	313.6
		810	1909.8	247.01	320.2
	EGPRS	512	1850.2	245.93	303.4
		661	1880.0	234.08	301.2
		810	1909.8	241.77	309.4

WCDMA

Band	Mode	Channel	f [MHz]	99% BW [MHz]	26dB BW [MHz]
Band 5	REL99	4132	826.4	4.1265	4.657
		4183	836.6	4.1261	4.695
		4233	846.6	4.1333	4.680
	HSDPA	4132	826.4	4.1294	4.666
		4183	836.6	4.1271	4.696
		4233	846.6	4.1328	4.679
Band 2	REL99	9262	1852.4	4.1481	4.696
		9400	1880.0	4.1353	4.682
		9538	1907.6	4.1463	4.704
	HSDPA	9262	1852.4	4.1531	4.667
		9400	1880.0	4.1562	4.684
		9538	1907.6	4.1522	4.670

LTE Band 5

Band	BW [MHz]	Channel	f [MHz]	Mode	99% BW [MHz]	26dB BW [MHz]
Band 5	10	20450	829.0	QPSK	8.9549	9.768
				16QAM	8.9694	9.814
		20524	836.5	QPSK	8.9428	9.812
				16QAM	8.9557	9.780
		20599	844.0	QPSK	8.9689	9.749
				16QAM	8.9419	9.729
	5	20425	826.5	QPSK	4.4985	4.970
				16QAM	4.4927	4.985
		20524	836.5	QPSK	4.4889	4.952
				16QAM	4.4881	4.952
		20624	846.5	QPSK	4.4950	4.945
				16QAM	4.4826	4.928
	3	20415	825.5	QPSK	2.6919	2.975
				16QAM	2.6949	2.948
		20524	836.5	QPSK	2.6909	2.970
				16QAM	2.6908	2.969
		20634	847.5	QPSK	2.6931	2.979
				16QAM	2.6898	2.980
	1.4	20407	824.7	QPSK	1.0952	1.296
				16QAM	1.0834	1.283
		20524	836.5	QPSK	1.0830	1.269
				16QAM	1.0842	1.283
		20624	848.3	QPSK	1.0873	1.311
				16QAM	1.0930	1.287

LTE Band 41

Band	BW [MHz]	Channel	f [MHz]	Mode	99% BW [MHz]	26dB BW [MHz]
Band 41	20	40340	2565.0	QPSK	17.909	19.29
				16QAM	17.900	19.47
		40740	2605.0	QPSK	17.873	19.33
				16QAM	17.899	20.26
		41140	2645.0	QPSK	17.901	20.67
				16QAM	17.893	19.41
	15	40315	2562.5	QPSK	13.427	14.53
				16QAM	13.439	15.19
		40740	2605.0	QPSK	13.426	14.66
				16QAM	13.419	15.09
		41165	2647.5	QPSK	13.434	14.70
				16QAM	13.416	14.58
	10	40290	2560.0	QPSK	8.9361	9.773
				16QAM	8.9608	9.635
		40740	2605.0	QPSK	8.9577	9.962
				16QAM	8.9379	9.854
		41190	2650.0	QPSK	8.9621	9.870
				16QAM	8.9734	9.763
	5	40265	2557.5	QPSK	4.4860	5.159
				16QAM	4.4870	4.945
		40740	2605.0	QPSK	4.4876	4.932
				16QAM	4.4808	4.946
		41215	2652.5	QPSK	4.5023	4.981
				16QAM	4.4760	4.936

9.1.2. OCCUPIED BANDWIDTH PLOTS


GSM 850




GSM 1900




WCDMA Band 5

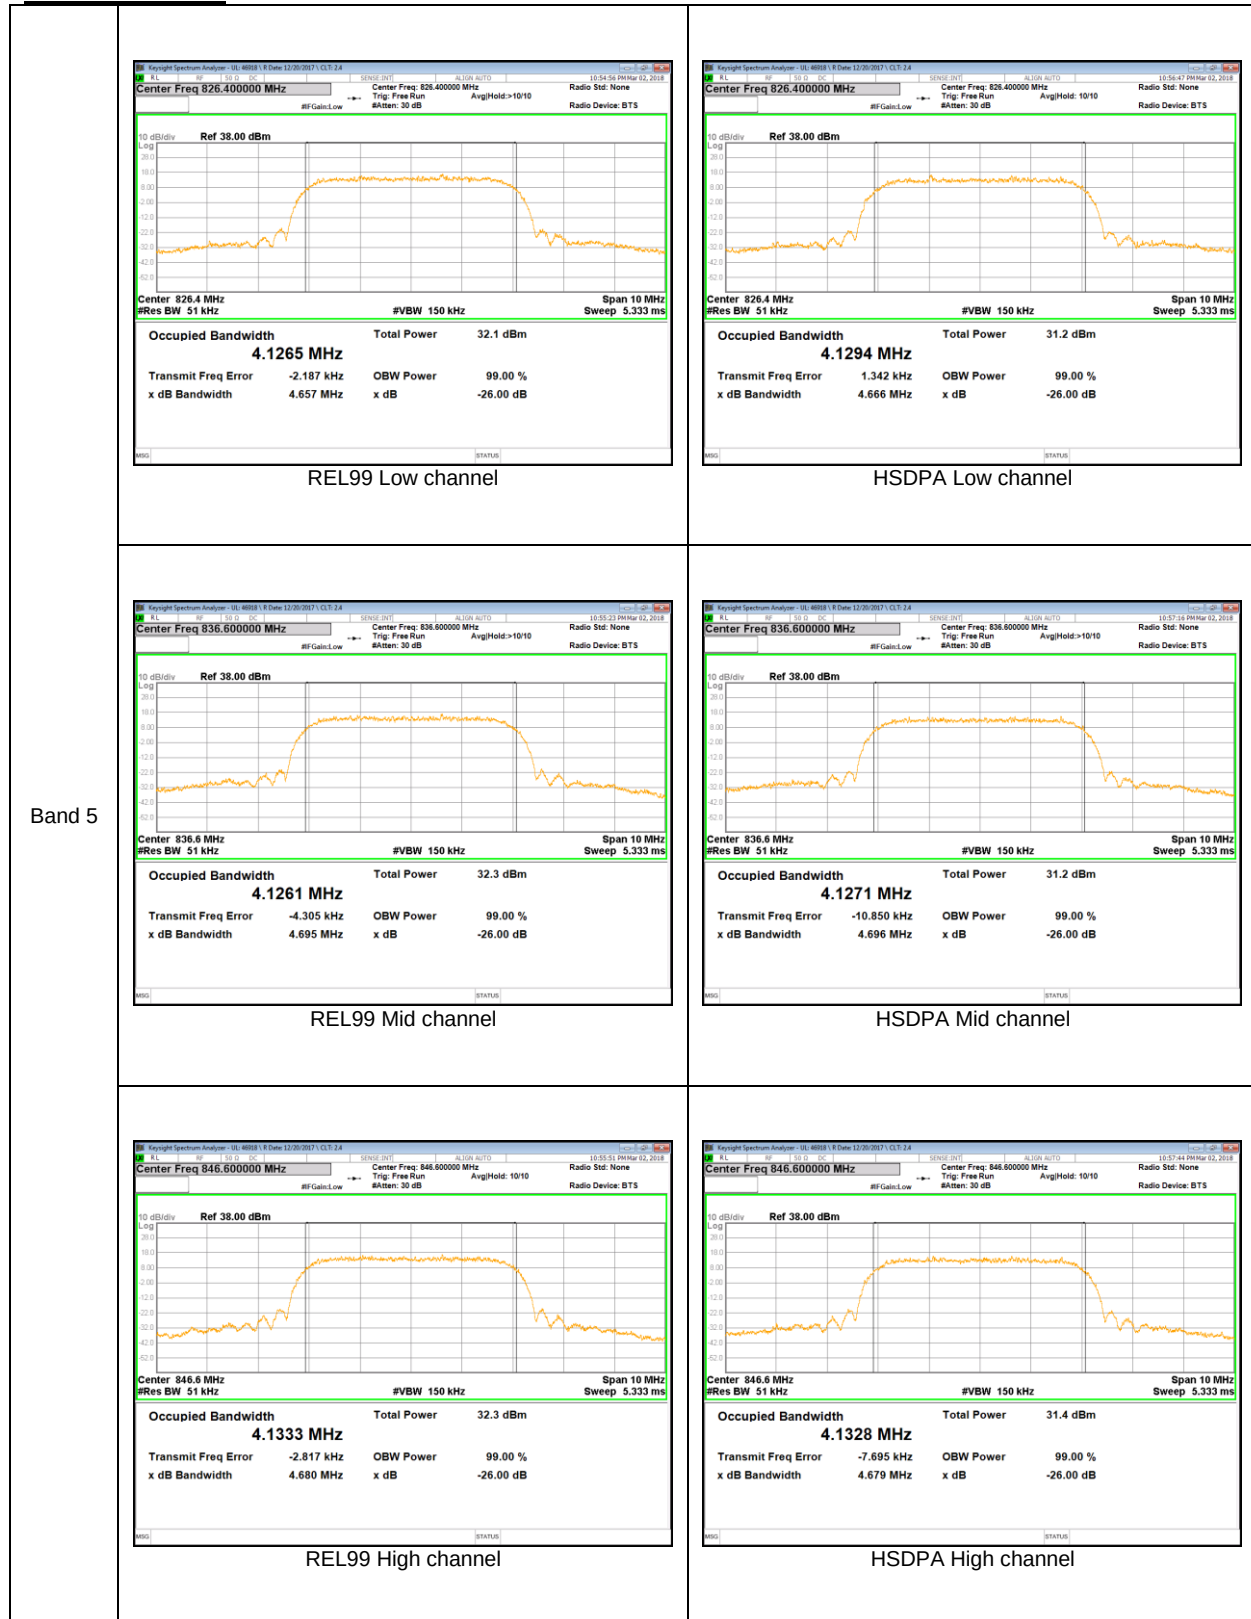



WCDMA Band 2

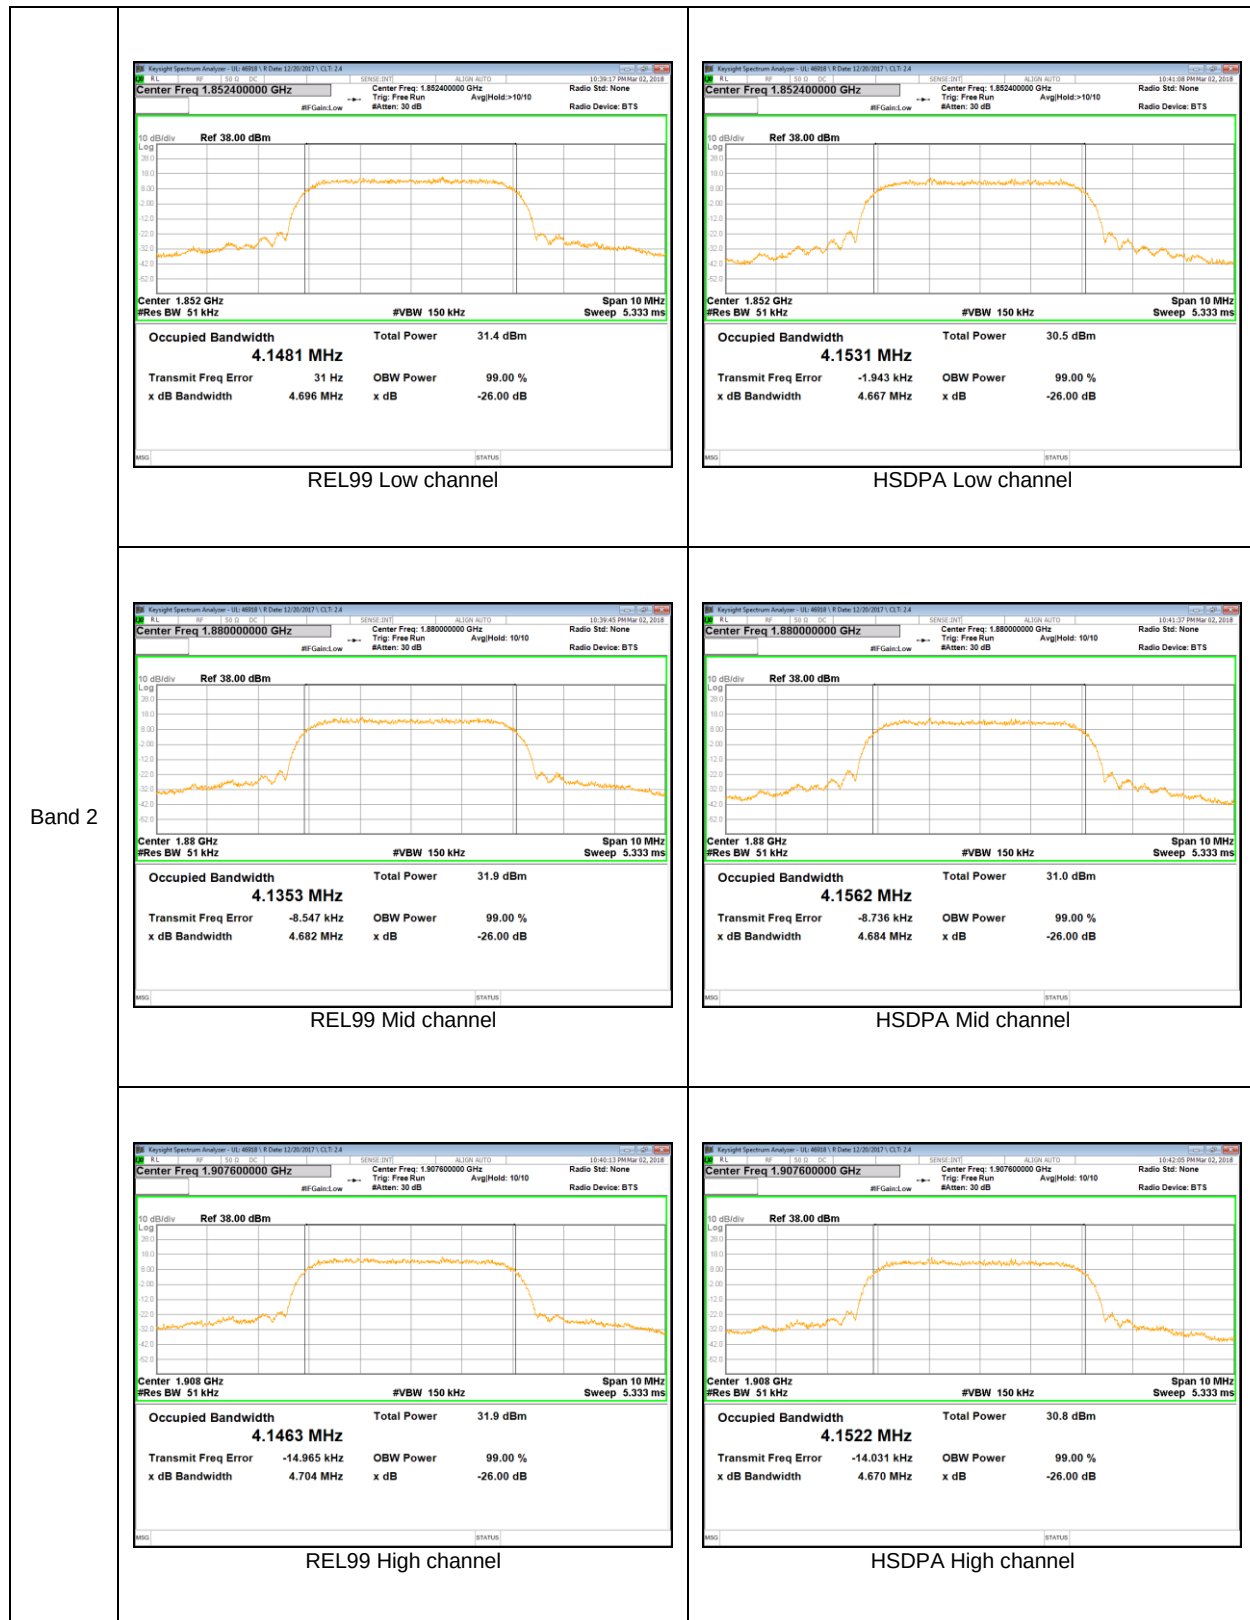


LTE Band 5

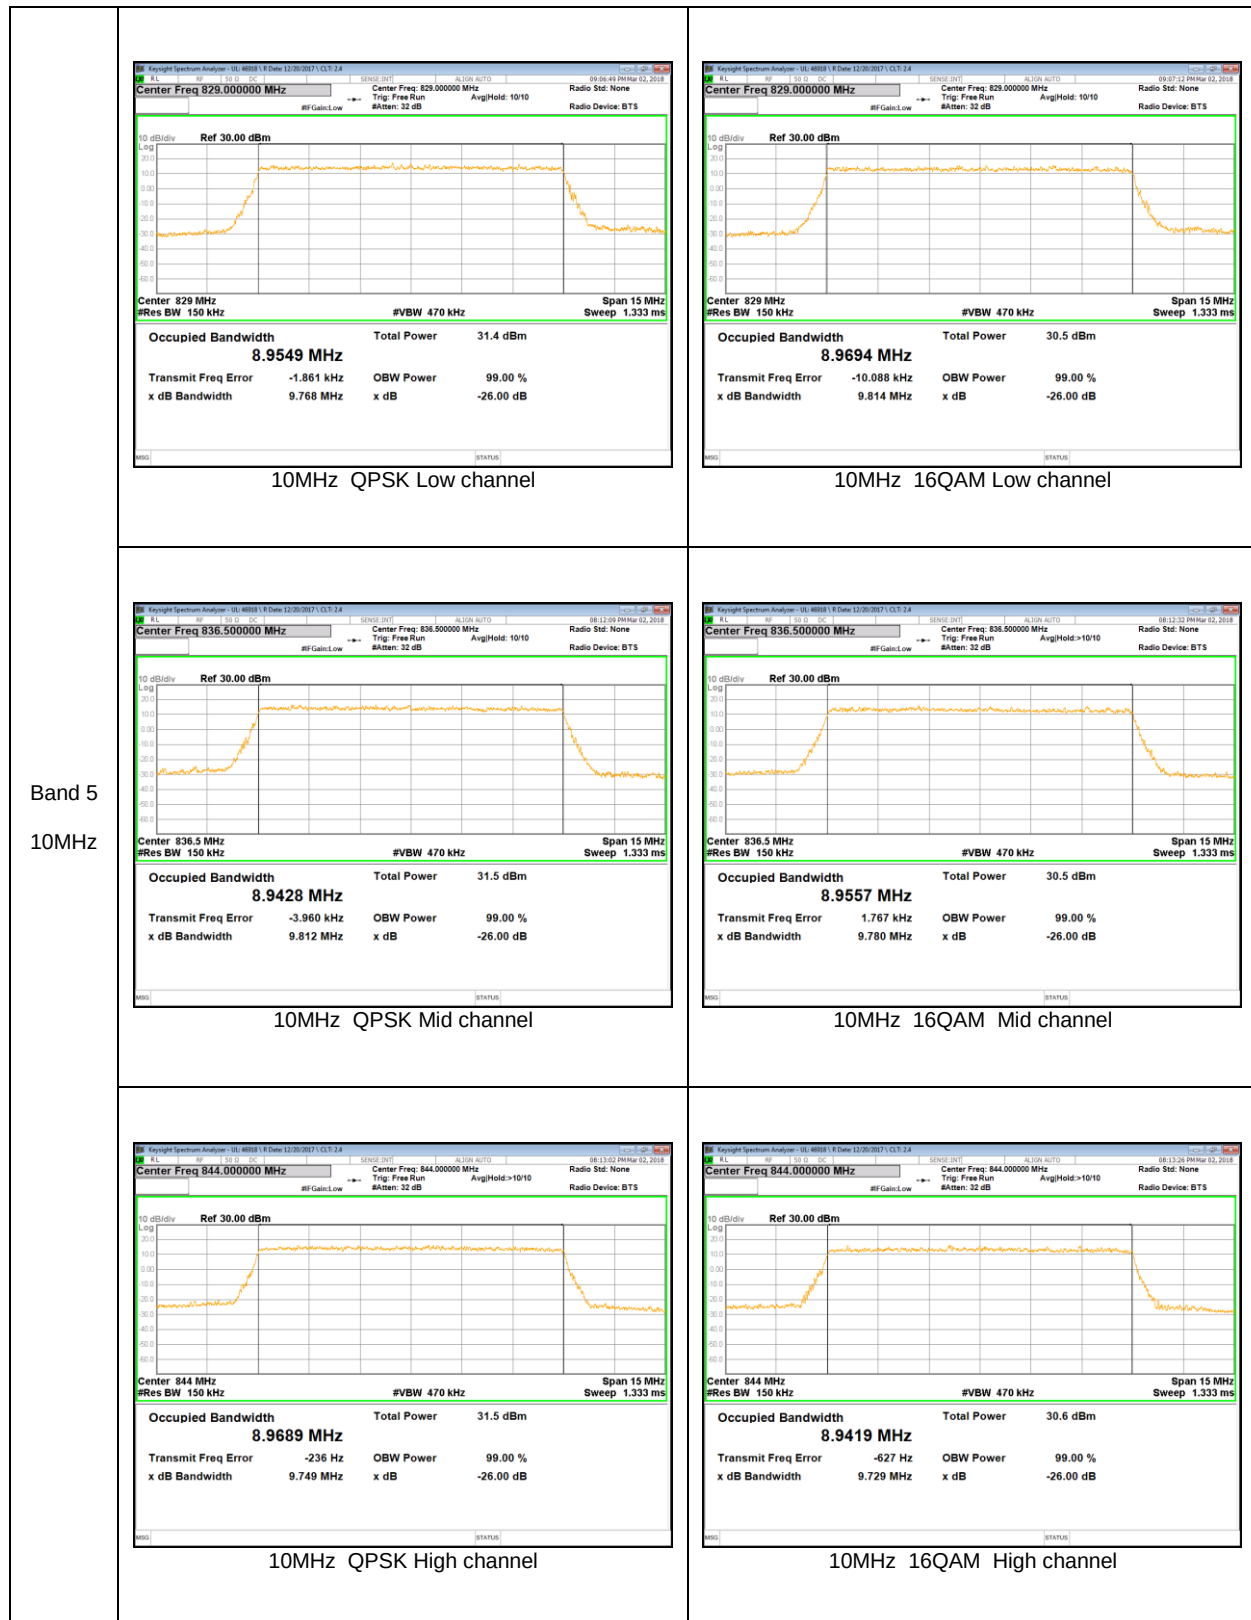

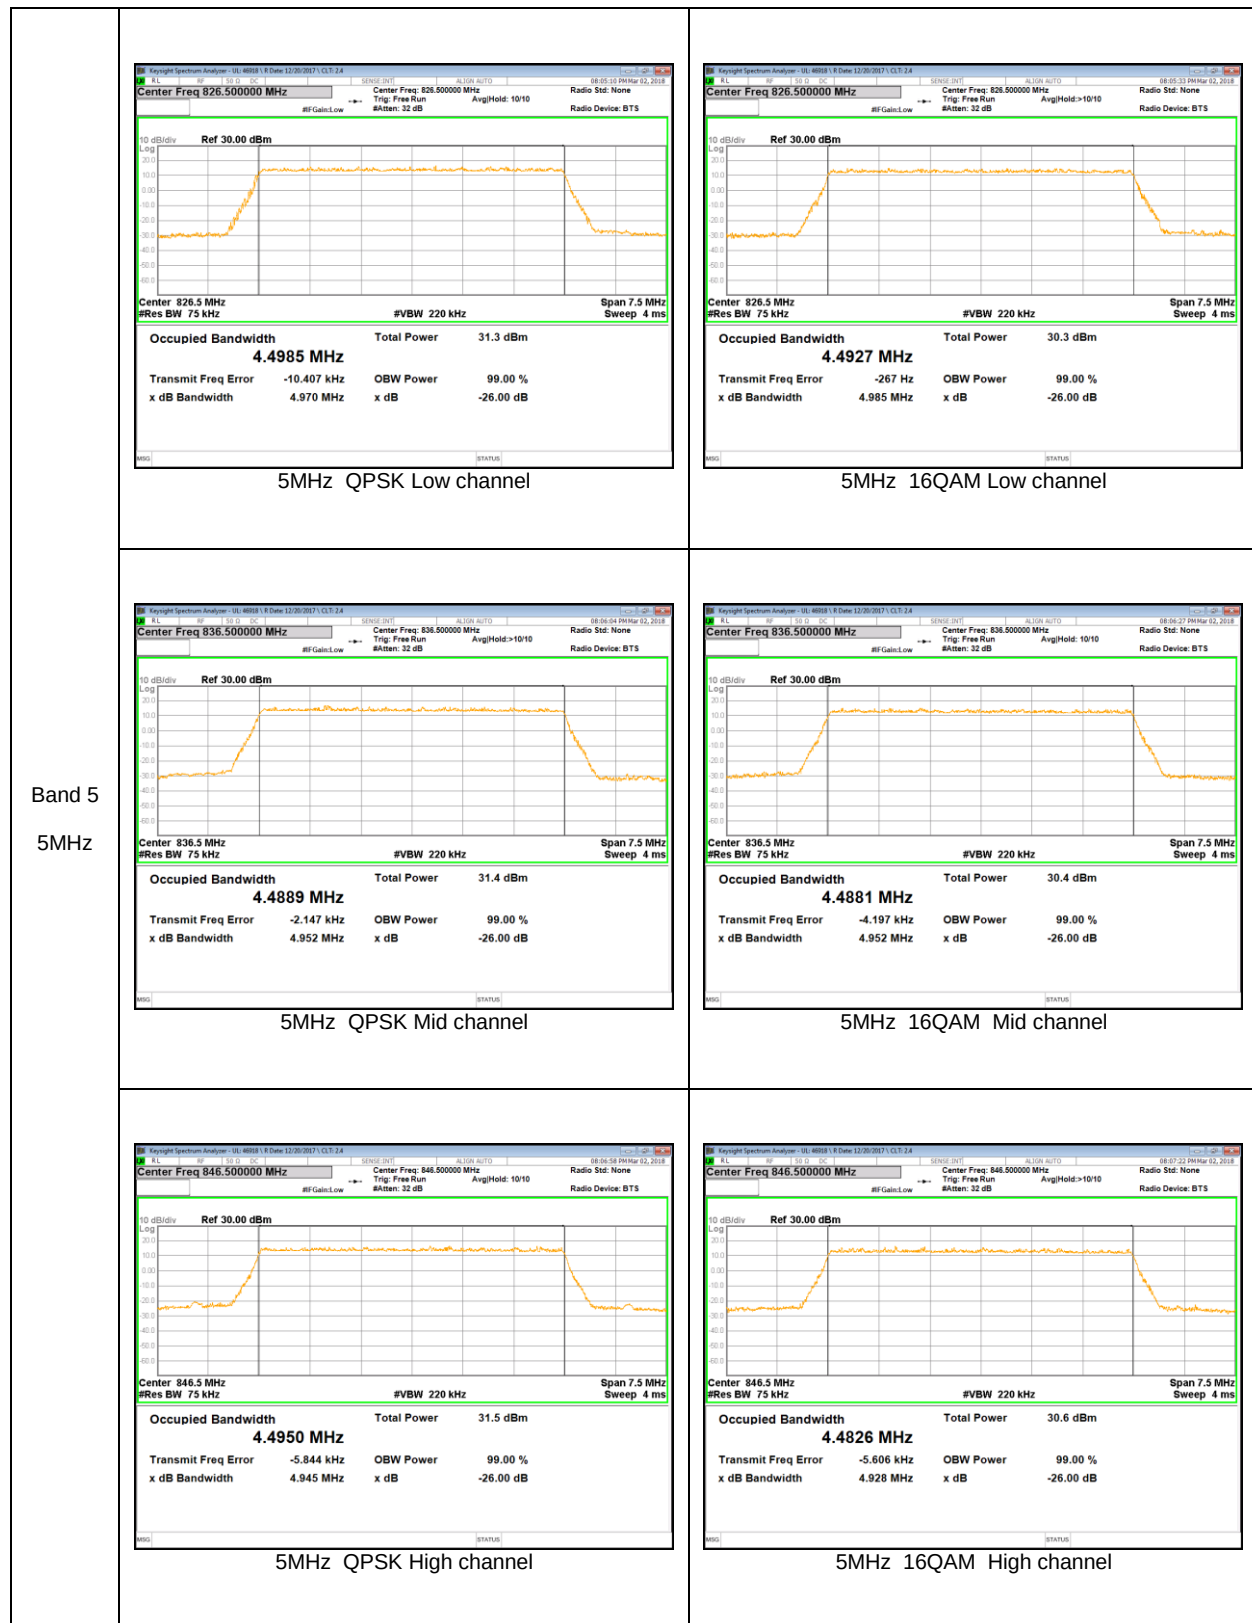

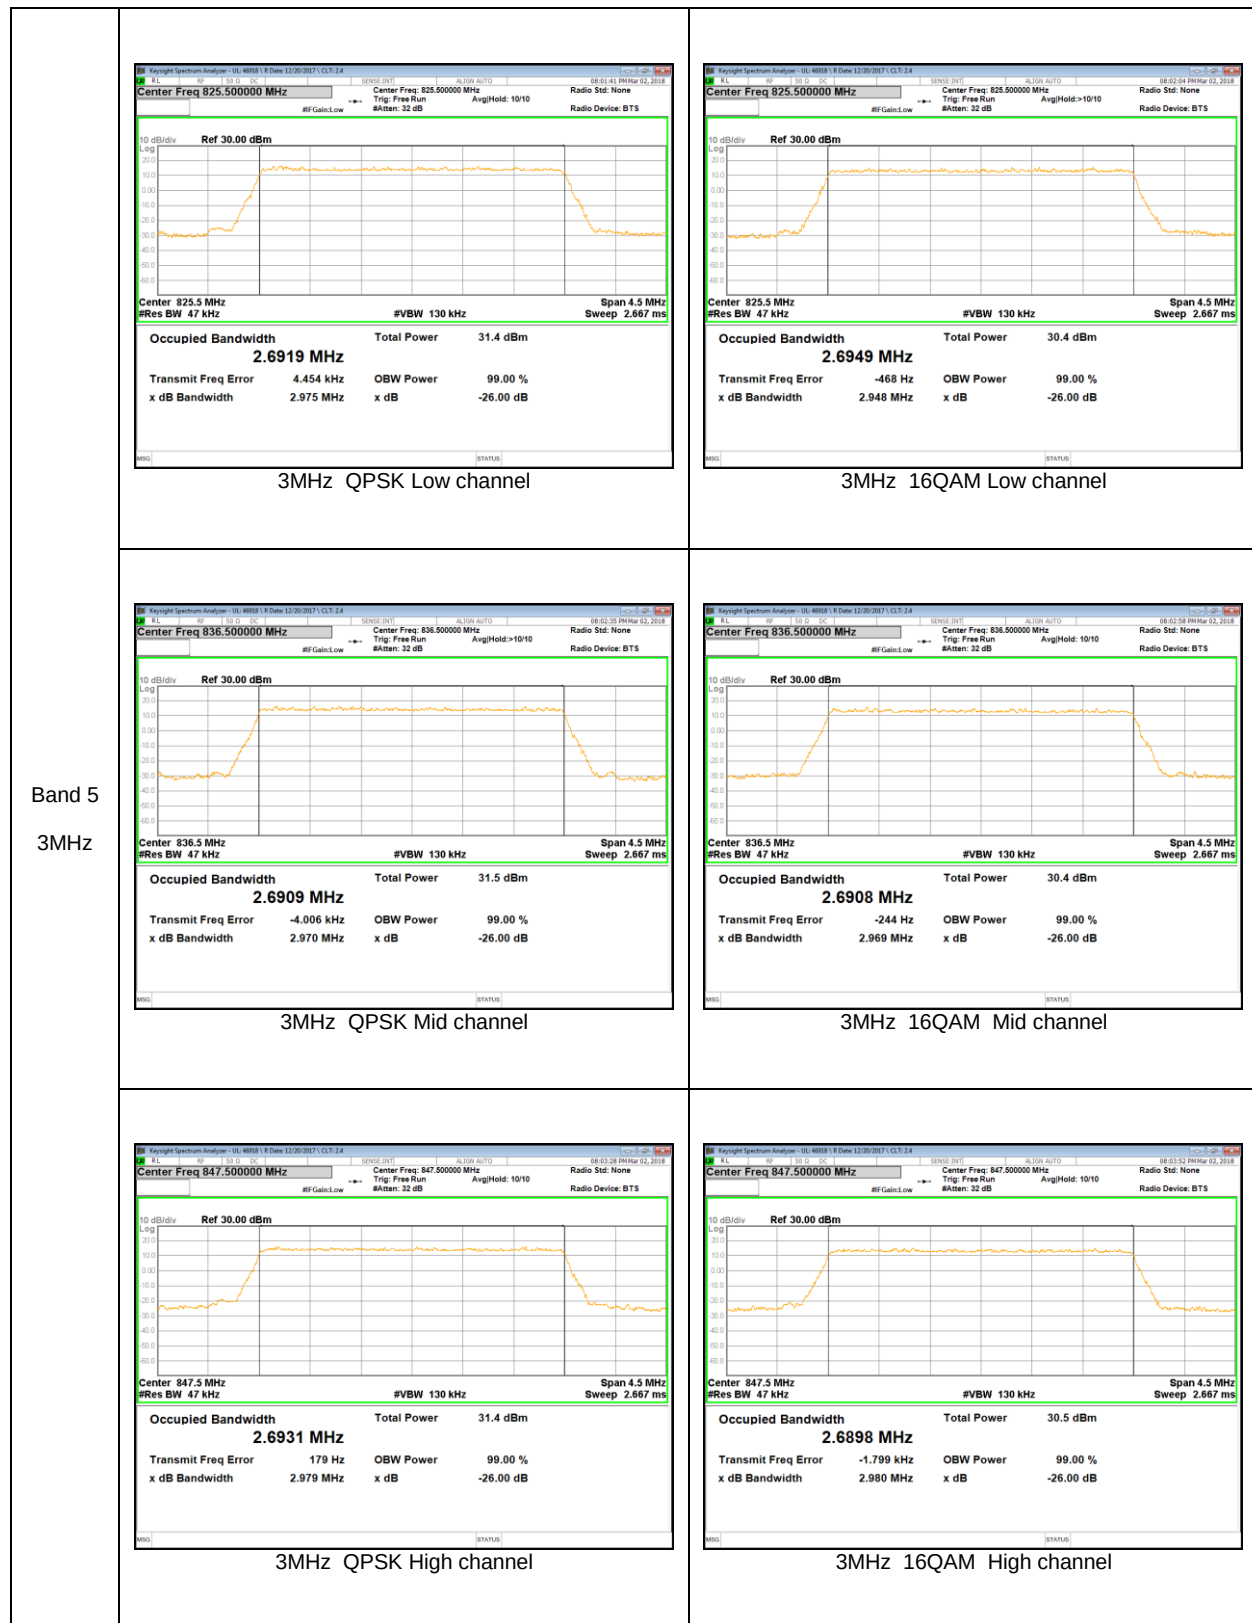

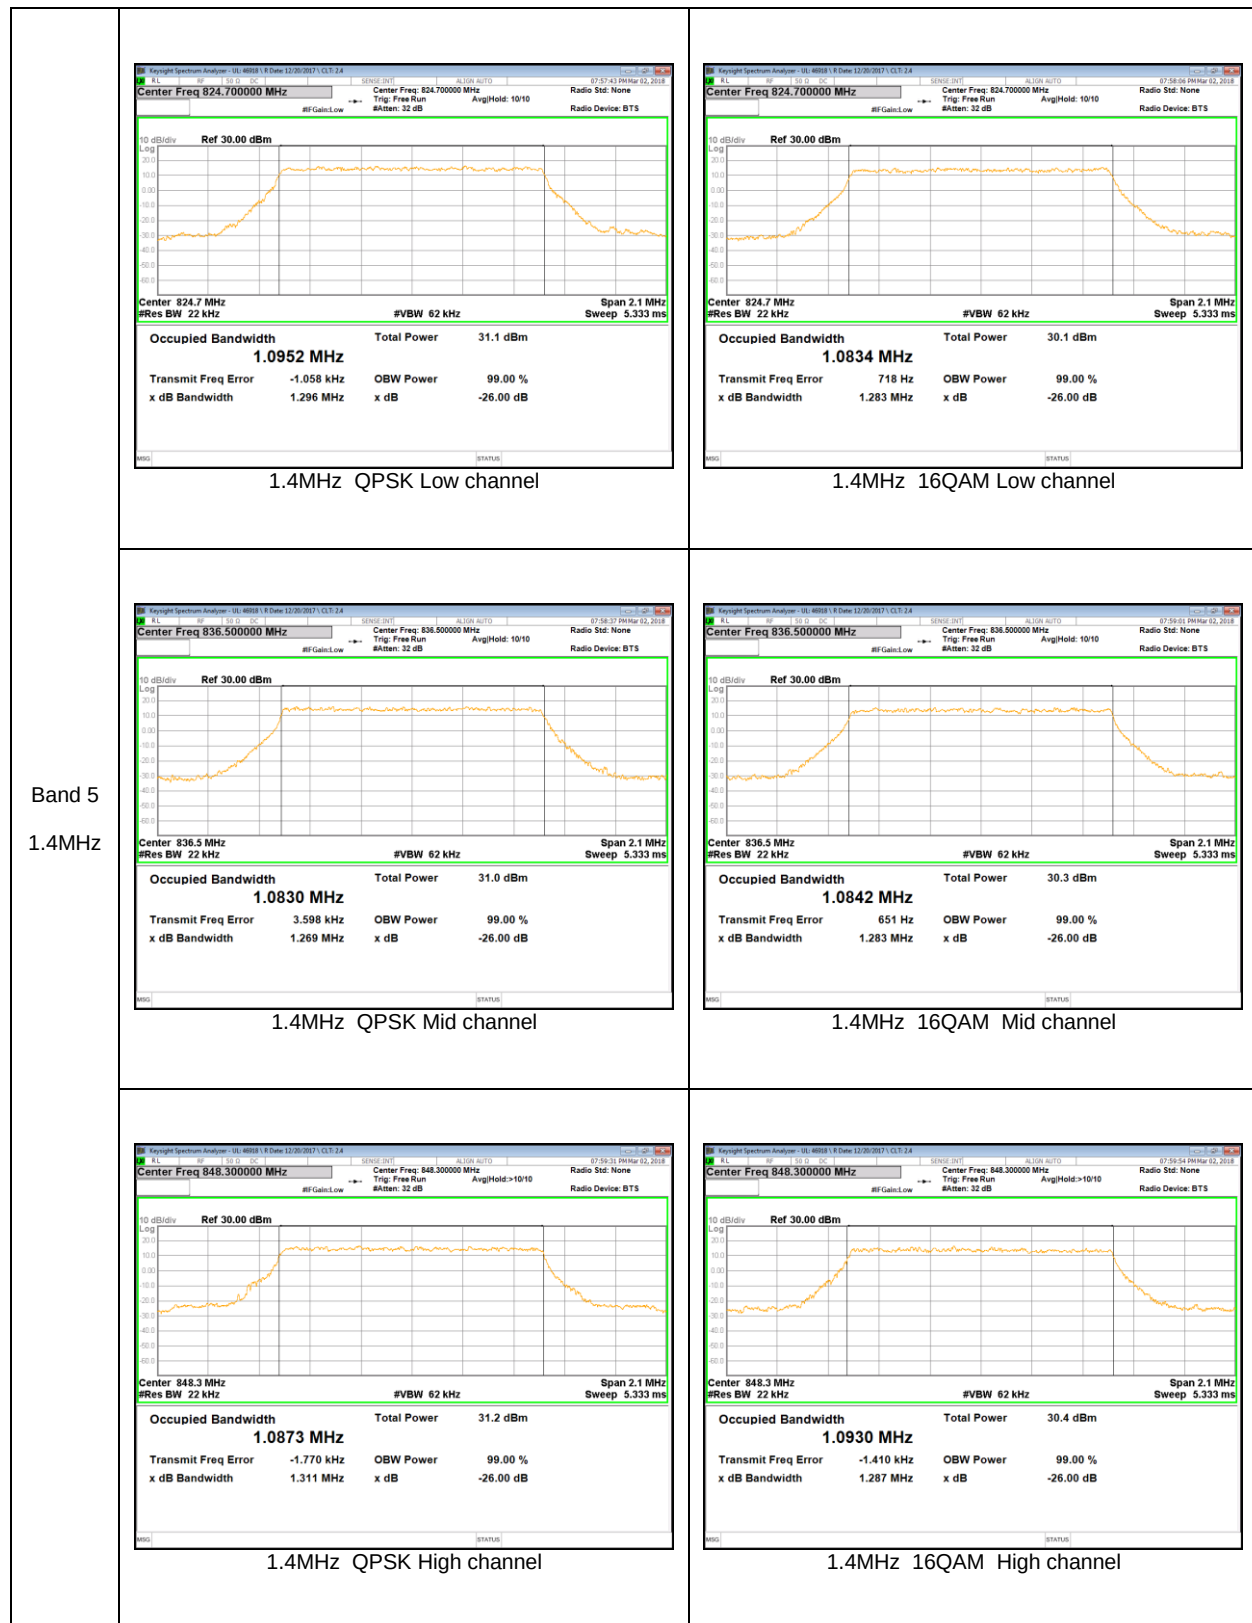

LTE Band 41

