



**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER: SM-A605FN/DS, SM-A605FN and SM-A605X

FCC ID: A3LSMA605FN

REPORT NUMBER: 4788372835-S1V1

ISSUE DATE: 3/21/2018

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
**UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	3/21/2018	Initial Issue	Sunghoon Kim

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	11
6.1.	DUT Description	11
6.2.	Wireless Technologies.....	12
6.3.	Nominal and Maximum Output Power.....	13
6.4.	General LTE SAR Test and Reporting Considerations.....	15
6.5.	Power Reduction by Proximity Sensing	16
6.5.1.	Proximity Sensor Triggering Distance (KDB 616217 §6.2).....	16
6.5.2.	Proximity Sensor Coverage (KDB 616217 §6.3)	28
6.5.3.	Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4).....	28
6.5.4.	Resulting test positions for SAR measurements	29
7	RF Exposure Conditions (Test Configurations)	30
8	Dielectric Property Measurements & System Check	31
8.1	Dielectric Property Measurements.....	31
8.2	System Check.....	35
9	Conducted Output Power Measurements.....	38
9.1	GSM	38
9.2	W-CDMA	40
9.3	LTE.....	45
9.4	Wi-Fi 2.4 GHz (DTS Band).....	50
9.5	Wi-Fi 5GHz (U-NII Bands).....	51
9.6	Bluetooth	52
10.	Measured and Reported (Scaled) SAR Results.....	53
10.1	GSM 850	55
10.2	GSM1900	55
10.3	W-CDMA Band II.....	56

10.4	W-CDMA Band V	56
10.5	LTE Band 5 (10MHz Bandwidth).....	57
10.6	Wi-Fi (DTS Band)	57
10.7	Wi-Fi (U-NII Bands)	58
10.8	Bluetooth	59
11.	SAR Measurement Variability.....	60
12.	Simultaneous Transmission SAR Analysis.....	61
12.1	Sum of the SAR for GSM 850 & Wi-Fi & BT.....	62
12.2	Sum of the SAR for GSM 1900 & Wi-Fi & BT.....	62
12.3	Sum of the SAR for WCDMA Band II & Wi-Fi & BT.....	63
12.4	Sum of the SAR for WCDMA Band V & Wi-Fi & BT	63
12.5	Sum of the SAR for LTE Band 5 & Wi-Fi & BT.....	64
Appendixes		65
	4788372835-S1V1 FCC Report SAR_App A_Photos & Ant. Locations.....	65
	4788372835-S1V1 FCC Report SAR_App B_Highest SAR Test Plots.....	65
	4788372835-S1V1 FCC Report SAR_App C_System Check Plots.....	65
	4788372835-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients	65
	4788372835-S1V1 FCC Report SAR_App E_Probe Cal. Certificates	65
	4788372835-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates.....	65

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.				
FCC ID	A3LSMA605FN				
Model Number	SM-A605FN/DS, SM-A605FN and SM-A605X				
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013				
SAR Limits (W/Kg)					
Exposure Category	Peak spatial-average(1g of tissue)			Phablet (10g of tissue)	
General population / Uncontrolled exposure	1.6			4.0	
The Highest Reported SAR (W/kg)					
RF Exposure Conditions		Equipment Class			
		Licensed	DTS	U-NII	DSS(BT)
Head		0.24	0.32	1.10	0.16
Body-worn		1.03	0.11	0.57	N/A
Hotspot		1.04	0.23	0.85	
Phablet-10g		1.39	N/A	2.35	
Simultaneous TX	Head	1.34	0.56	1.34	0.41
	Body-worn	1.17	1.14	1.17	N/A
	Hotspot	1.31	1.28	1.31	
	Phablet-10g	3.74	N/A	3.74	
Date Tested		2/21/2018 to 3/16/2018			
Test Results		Pass			
UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.					
Approved & Released By:			Prepared By:		
					
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory			Sunghoon Kim Associate Test Engineer UL Korea, Ltd. Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

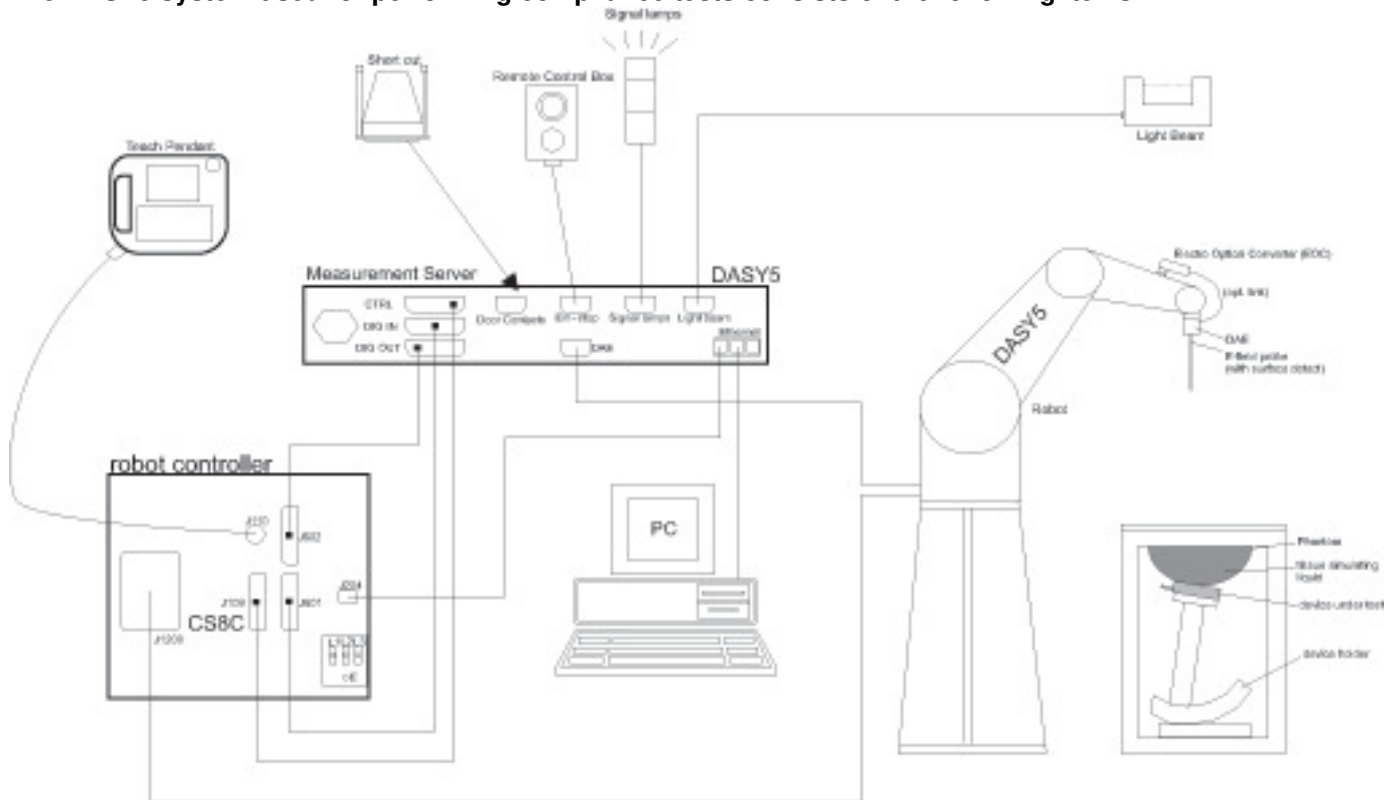

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-8-2018
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-2-2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-11-2018
Thermometer	Lutron	MHB-382SD	AH.91478	8-10-2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-7-2018
Power Sensor	Agilent	U2000A	MY54260010	8-8-2018
Power Sensor	Agilent	U2000A	MY54260007	8-8-2018
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2018
Directional Coupler	Agilent	772D	MY52180193	8-7-2018
Directional Coupler	Agilent	778D	MY52180432	8-7-2018
Low Pass Filter	MICROLAB	LA-15N	03943	8-7-2018
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2018
Low Pass Filter	MICROLAB	LA-60N	03942	8-7-2018
Attenuator	Agilent	8491B/003	MY39269292	8-7-2018
Attenuator	Agilent	8491B/010	MY39269315	8-7-2018
Attenuator	Agilent	8491B/020	MY39269298	8-7-2018
E-Field Probe (SAR1)	SPEAG	EX3DV4	7376	8-22-2018
E-Field Probe (SAR2)	SPEAG	EX3DV4	7330	1-22-2019
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	9-28-2018
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1468	8-22-2018
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1447	11-22-2018
Data Acquisition Electronics (SAR2)	SPEAG	DAE3	479	10-23-2018
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	7-20-2018
System Validation Dipole	SPEAG	D835V2	4d194	7-19-2018
System Validation Dipole	SPEAG	D1900V2	5d190	9-20-2018
System Validation Dipole	SPEAG	D2450V2	939	9-19-2018
System Validation Dipole	SPEAG	D5GHzV2	1209	2-15-2019
System Validation Dipole	SPEAG	D5GHzV2	1184	8-23-2018
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-10-2018
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	2-9-2019
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-16-2018

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	12-08-2018
Base Station Simulator	R & S	CMW500	150314	12-05-2018
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	8-7-2018

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 160.2 mm x 75.7 mm Overall Diagonal: 169.0 mm Display Diagonal: 154.0 mm		
Back Cover	☒ The Back Cover is not removable.		
Battery Options	☒ The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5 GHz_Ch.149 – Ch.165)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5 GHz_Ch.36 – Ch.48, Ch 149 – Ch165)		
Test Sample Information	No.	S/N	Notes
	1	RB90179H	Wi-Fi/BT conduction
	2	R38K104QAPL	Main conduction
	3	R38K104QFAK	SAR
	4	R38K104QFDB	SAR
	5	R38K104R4LJ	SAR
	6	R38K104R5DF	SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Release.7) HSUPA (Release.9) DC-HSDPA (Release 8) HSPA+ (Release.9)		100%
LTE	FDD Band 5	QPSK 16QAM ☒ Rel. 10 Does not support Carrier Aggregation (CA)		100%
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b		99.7% (802.11b)
		802.11g		98.2% (802.11g)
		802.11n (HT20)		98.1% (802.11n 20MHz BW)
	5 GHz	802.11a		98.2% (802.11a)
802.11n (HT20)		98.1% (802.11n 20MHz BW)		
802.11n (HT40)		96.0% (802.11n 40MHz BW)		
Does this device support bands 5.60 ~ 5.65 GHz? ☐ Yes ☒ No				
Does this device support Band gap channel(s)? ☐ Yes ☒ No				
Bluetooth	2.4 GHz	Version 4.2 LE		76.9% (DH5)

Notes:

1. The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.9% and was considered and used for SAR Testing.
2. Duty cycle for Wi-Fi is referenced from the DTS and UNII report.

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power Hotspot back-off (dBm)		Reduced. RF Output Power Proximity sensor back-off (dBm)	
			Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr	Tune-up Limit	Frame Pwr
GSM850	Voice/GPRS	1	34.0	25.0	32.5	23.5	32.5	23.5
	GPRS	2	31.5	25.5	29.5	23.5	29.5	23.5
	GPRS	3	29.7	25.4	27.7	23.4	27.7	23.4
	GPRS	4	28.5	25.5	26.5	23.5	26.5	23.5
	EGPRS	1	27.5	18.5	25.5	16.5	25.5	16.5
	EGPRS	2	25.5	19.5	23.5	17.5	23.5	17.5
	EGPRS	3	23.5	19.2	22.0	17.7	22.0	17.7
	EGPRS	4	23.5	20.5	21.0	18.0	21.0	18.0
GSM1900	Voice/GPRS	1	30.5	21.5	28.0	19.0	28.0	19.0
	GPRS	2	28.0	22.0	25.0	19.0	25.0	19.0
	GPRS	3	26.2	21.9	23.2	18.9	23.2	18.9
	GPRS	4	25.0	22.0	22.0	19.0	22.0	19.0
	EGPRS	1	26.5	17.5	23.5	14.5	23.5	14.5
	EGPRS	2	24.5	18.5	21.5	15.5	21.5	15.5
	EGPRS	3	23.0	18.7	20.0	15.7	20.0	15.7
	EGPRS	4	21.5	18.5	18.5	15.5	18.5	15.5

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
W-CDMA Band II	R99	24.0	20.0	20.0
	HSDPA	23.5	19.5	19.5
	HSUPA	23.5	19.5	19.5
	DC-HSDPA	23.0	19.0	19.0
W-CDMA Band V	R99	24.5	22.5	22.5
	HSDPA	24.0	22.0	22.0
	HSUPA	24.0	22.0	22.0
	DC-HSDPA	24.0	22.0	22.0

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
LTE Band 5	QPSK	25.0	23.0	23.0

Notes:

1. The device utilizes power reduction under some portable hotspot conditions for SAR compliance. There is power reduction for WWAN bands. The reduced powers were confirmed via conducted power measurements the RF port. Detailed description of the hotspot power reduction mechanism is included in the operational description.
2. WWAN bands has support to proximity sensor back-off function. it is operating during extremity (hand-held) use conditions. And This function is apply to phablet 10-g SAR exposure condition. Other Head and Body exposure conditions are performed SAR test at full power. The proximity sensor details explain in SAR report according to Section 6 in KDB 616217.
3. Both back-off functions are not operating at the same time.
4. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

RF Air interface	Mode	Max. RF Output Pow er (dBm)	Reduced. RF Output Pow er IR Proximity sensor back-off (dBm)
WiFi 2.4 GHz (Ch.1 - Ch.11)	802.11b	19.5	13.5
	802.11g	13.5	13.5
	802.11n HT20	13.5	13.5
WiFi 2.4 GHz (Ch.12)	802.11b	13.5	
	802.11g	10.5	
	802.11n HT20	10.5	
WiFi 2.4 GHz (Ch.13)	802.11b	13.5	
	802.11g	5.5	
	802.11n HT20	5.5	
WiFi 5 GHz	802.11a	18.5	11.5
	802.11n HT20	18.5	11.5
	802.11n HT40	15.5	11.5
Bluetooth		10.5	
Bluetooth LE		1.5	

Note(s):

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																																																				
	Band 5	Frequency range: 824 – 849 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																																														
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																																														
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																																														
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																				
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table> <tr> <th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr> <tr> <th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr> <tr> <td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr> <tr> <td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr> </table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing							Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
Power reduction	Yes																																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

Notes:

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).


6.5. Power Reduction by Proximity Sensing

6.5.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Front, Rear and Edge 3 of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

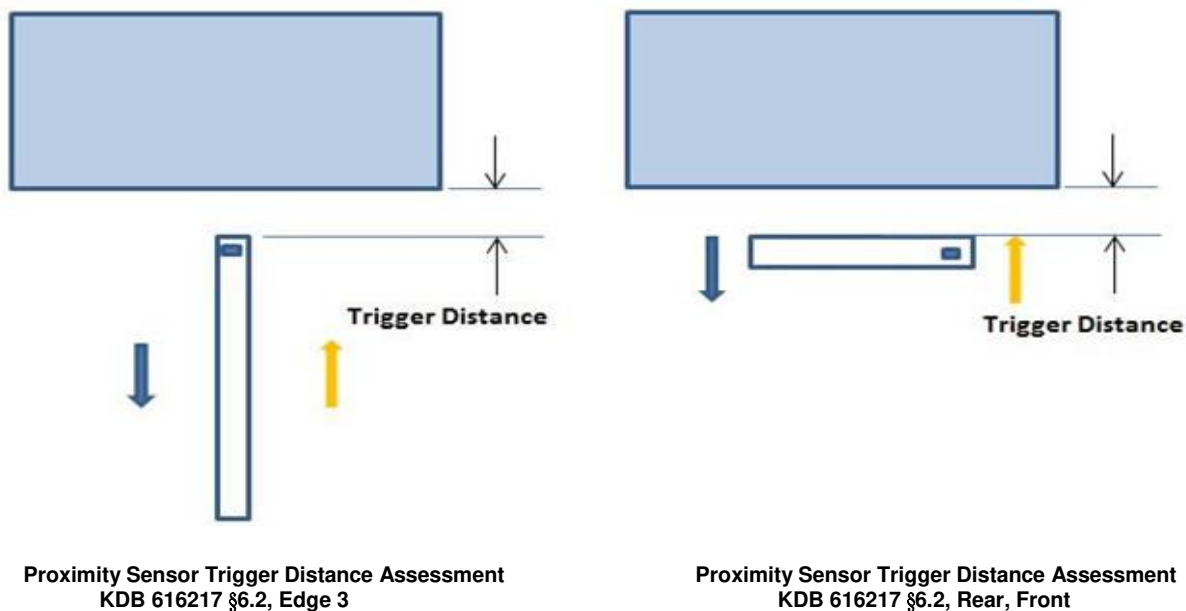

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point


Summary of Trigger Distances

Tissue simulating liquid	Trigger distance - Front		Trigger distance - Rear		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
850 Body	7 mm	7 mm	14 mm	14 mm	14 mm	14 mm
1900 Body	7 mm	7 mm	14 mm	14 mm	14 mm	14 mm
2450 Head	70 mm	70 mm	N/A		N/A	
5G Head	70 mm	70 mm	N/A		N/A	

Proximity Sensor Triggering Distance Measurement Results**GSM 850**


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
GSM850 Voice 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.5	33.5
GSM850 GPRS 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	29.1	29.1	29.1	29.1	29.1	31.1	31.2	31.2	31.1	31.2
GSM850 GPRS 3 Slots	27.3	27.3	27.2	27.2	27.3	29.3	29.4	29.4	29.3	29.3
GSM850 GPRS 4 Slots	26.1	26.0	26.1	26.0	26.1	28.1	28.1	28.1	28.0	28.0
GSM850 EGPRS 1 Slot	25.1	25.1	25.2	25.1	25.1	27.2	27.2	27.2	27.2	27.1
GSM850 EGPRS 2 Slots	23.1	23.1	23.0	23.0	23.1	25.1	25.1	25.1	25.1	25.0
GSM850 EGPRS 3 Slots	21.5	21.6	21.5	21.6	21.5	23.2	23.2	23.2	23.1	23.2
GSM850 EGPRS 4 Slots	20.5	20.5	20.5	20.5	20.5	23.1	23.1	23.1	23.2	23.1

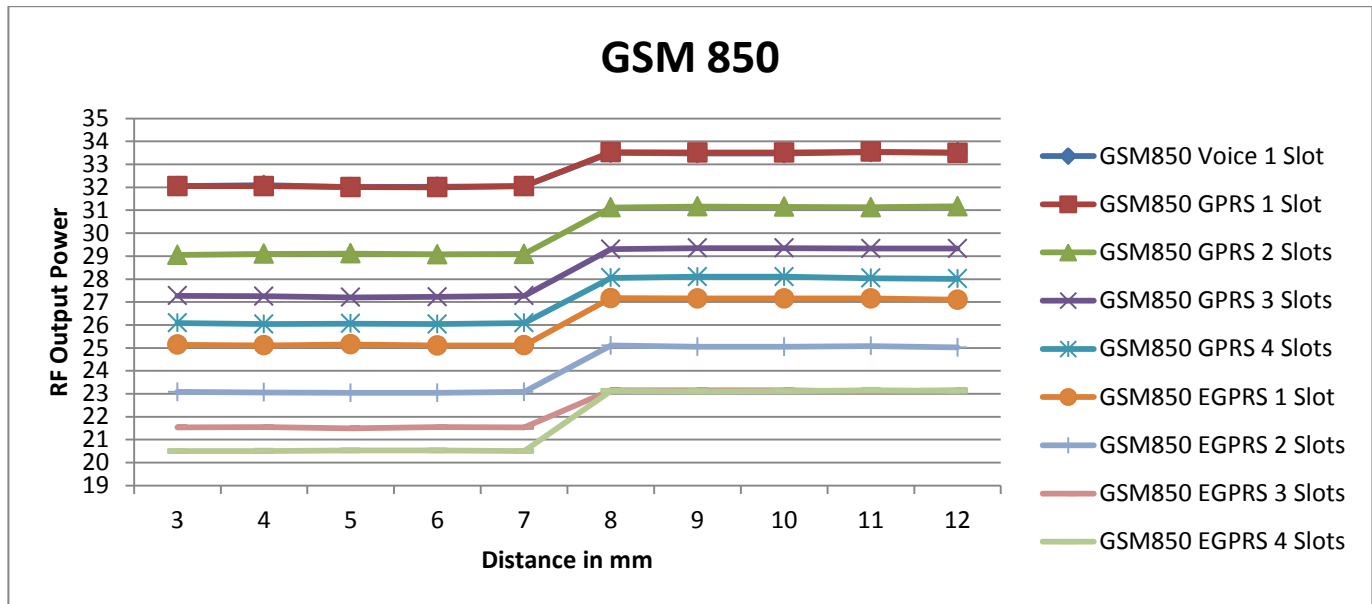


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
GSM850 Voice 1 Slot	32.1	32.1	32.0	32.1	32.0	33.5	33.5	33.5	33.5	33.5
GSM850 GPRS 1 Slot	32.1	32.1	32.0	32.1	32.0	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	29.1	29.1	29.1	29.1	29.1	31.2	31.2	31.1	31.1	31.1
GSM850 GPRS 3 Slots	27.3	27.2	27.2	27.3	27.2	29.4	29.3	29.4	29.3	29.3
GSM850 GPRS 4 Slots	26.0	26.1	26.0	26.1	26.0	28.1	28.0	28.1	28.0	28.1
GSM850 EGPRS 1 Slot	25.1	25.1	25.1	25.1	25.1	27.2	27.1	27.2	27.1	27.2
GSM850 EGPRS 2 Slots	23.1	23.0	23.0	23.1	23.0	25.1	25.0	25.1	25.1	25.1
GSM850 EGPRS 3 Slots	21.6	21.5	21.6	21.5	21.6	23.2	23.1	23.1	23.1	23.2
GSM850 EGPRS 4 Slots	20.5	20.5	20.5	20.5	20.5	23.1	23.2	23.1	23.2	23.1

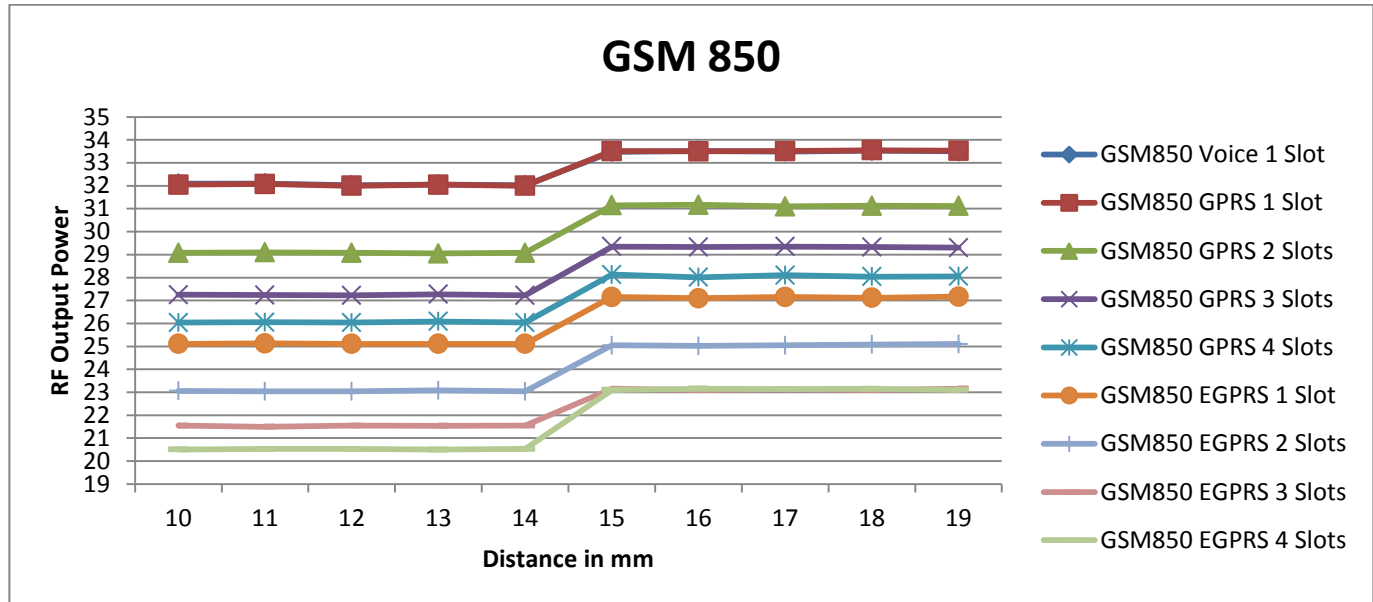

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
GSM850 Voice 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.5	33.5
GSM850 GPRS 1 Slot	32.1	32.1	32.0	32.0	32.1	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	29.1	29.1	29.1	29.1	29.1	31.1	31.1	31.2	31.1	31.2
GSM850 GPRS 3 Slots	27.3	27.3	27.2	27.2	27.3	29.3	29.4	29.4	29.3	29.3
GSM850 GPRS 4 Slots	26.1	26.0	26.1	26.0	26.1	28.1	28.1	28.1	28.0	28.0
GSM850 EGPRS 1 Slot	25.1	25.1	25.2	25.1	25.1	27.2	27.1	27.1	27.2	27.1
GSM850 EGPRS 2 Slots	23.1	23.1	23.0	23.0	23.1	25.1	25.1	25.1	25.1	25.0
GSM850 EGPRS 3 Slots	21.5	21.5	21.5	21.6	21.5	23.2	23.2	23.1	23.1	23.2
GSM850 EGPRS 4 Slots	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5

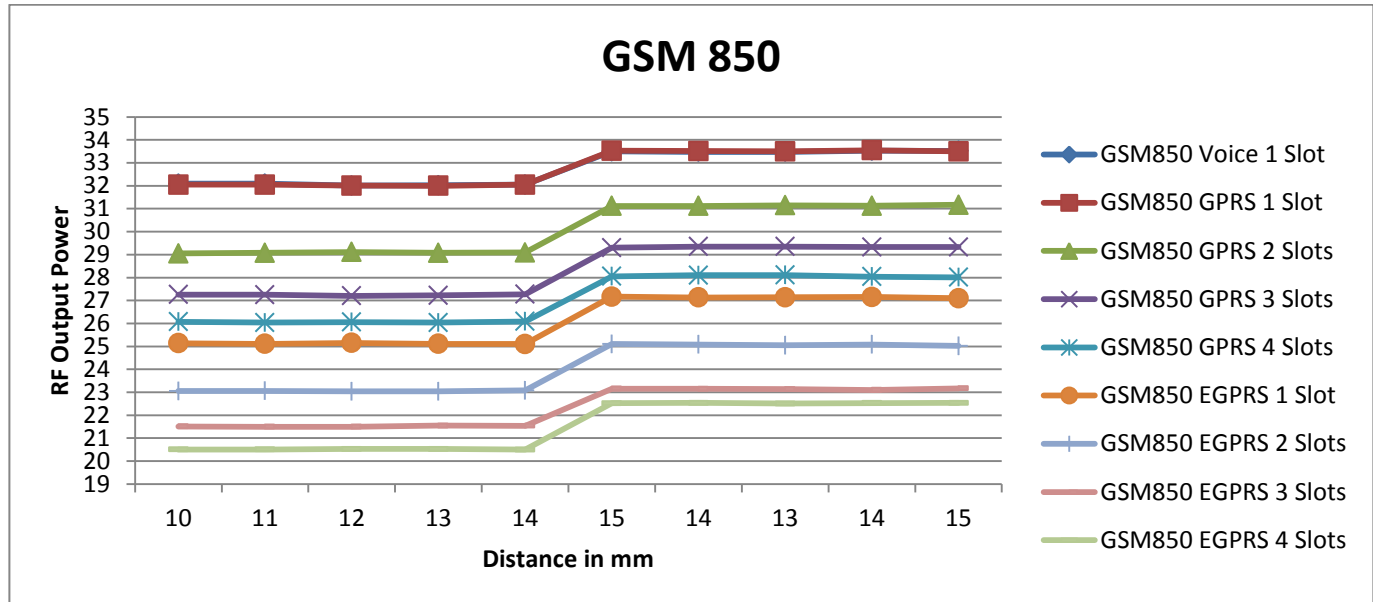

GSM 1900


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
GSM1900 Voice 1 Slot	27.5	27.1	27.2	27.6	27.5	30.2	30.3	30.2	30.2	30.2
GSM1900 GPRS 1 Slot	27.5	27.5	27.5	27.5	27.5	30.1	30.0	30.1	30.1	30.0
GSM1900 GPRS 2 Slots	24.5	24.5	24.5	24.5	24.5	27.6	27.5	27.5	27.6	27.6
GSM1900 GPRS 3 Slots	22.7	22.7	22.7	22.7	22.7	25.8	25.7	25.7	25.7	25.7
GSM1900 GPRS 4 Slots	21.5	21.5	21.5	21.6	21.5	24.5	24.6	24.5	24.5	24.5
GSM1900 EGPRS 1 Slot	23.1	23.1	23.1	23.2	23.1	26.1	26.0	26.0	26.1	26.1
GSM1900 EGPRS 2 Slots	21.1	21.1	21.0	21.1	21.1	24.1	24.0	24.0	24.0	24.1
GSM1900 EGPRS 3 Slots	19.5	19.5	19.5	19.6	19.5	22.6	22.5	22.5	22.6	22.6
GSM1900 EGPRS 4 Slots	18.0	18.1	18.0	18.1	18.0	21.2	21.1	21.1	21.1	21.2

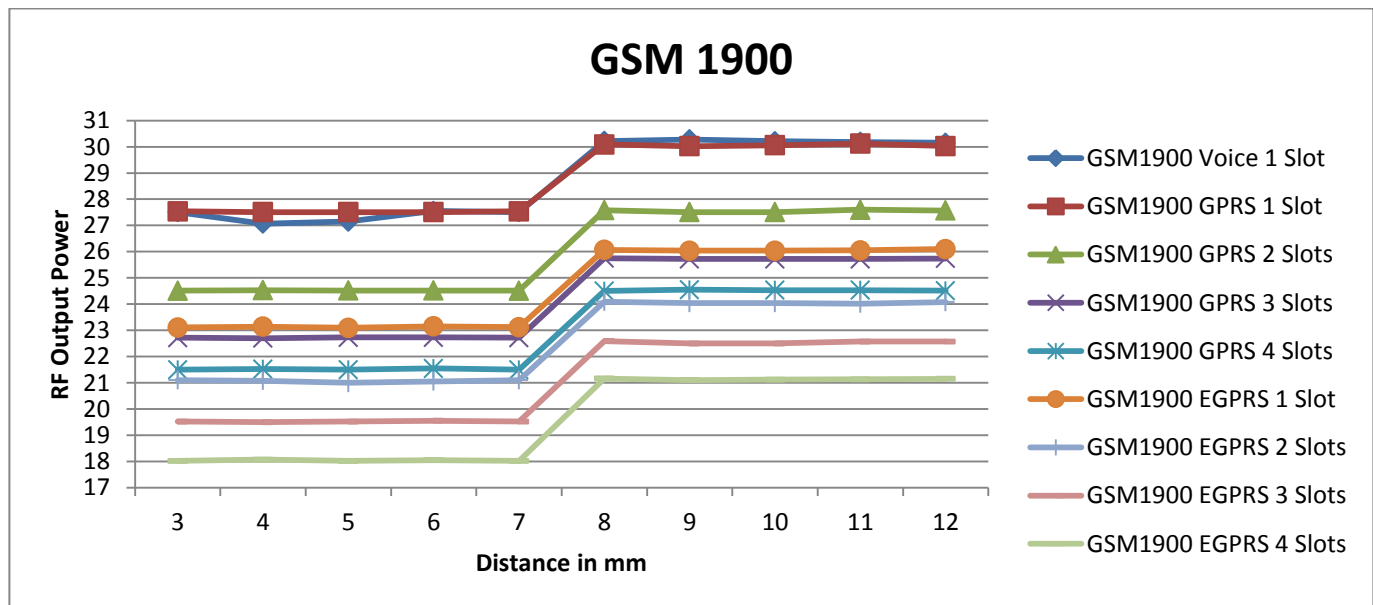


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
GSM1900 Voice 1 Slot	27.1	27.1	27.6	27.5	27.6	30.2	30.2	30.3	30.2	30.2
GSM1900 GPRS 1 Slot	27.5	27.5	27.5	27.5	27.5	30.0	30.0	30.1	30.1	30.1
GSM1900 GPRS 2 Slots	24.5	24.5	24.5	24.5	24.5	27.5	27.6	27.5	27.6	27.6
GSM1900 GPRS 3 Slots	22.7	22.7	22.7	22.7	22.7	25.7	25.7	25.7	25.7	25.8
GSM1900 GPRS 4 Slots	21.5	21.5	21.6	21.5	21.6	24.6	24.5	24.5	24.5	24.5
GSM1900 EGPRS 1 Slot	23.1	23.1	23.2	23.1	23.2	26.0	26.1	26.1	26.1	26.1
GSM1900 EGPRS 2 Slots	21.1	21.1	21.1	21.1	21.1	24.0	24.1	24.0	24.0	24.1
GSM1900 EGPRS 3 Slots	19.5	19.5	19.6	19.5	19.6	22.5	22.6	22.5	22.6	22.6
GSM1900 EGPRS 4 Slots	18.1	18.1	18.1	18.0	18.1	21.1	21.2	21.2	21.1	21.2

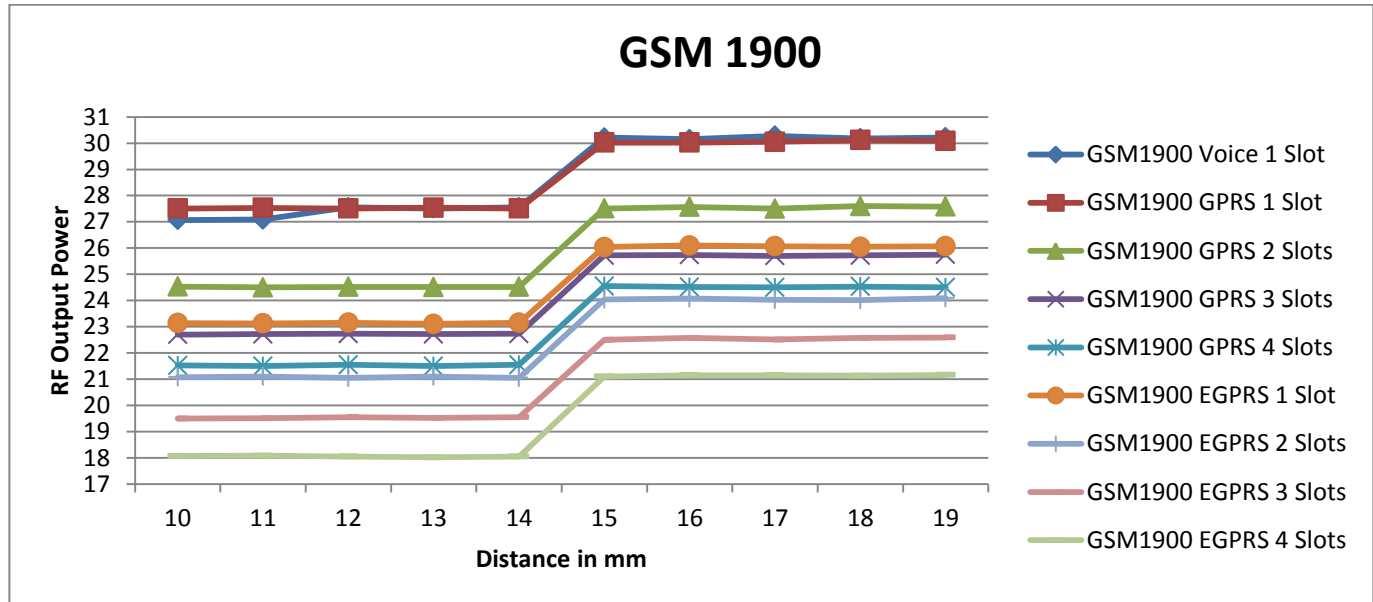

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
GSM1900 Voice 1 Slot	27.5	27.1	27.2	27.6	27.5	30.2	30.3	30.2	30.2	30.2
GSM1900 GPRS 1 Slot	27.6	27.5	27.5	27.5	27.5	30.1	30.1	30.0	30.1	30.0
GSM1900 GPRS 2 Slots	24.5	24.5	24.5	24.5	24.5	27.6	27.5	27.5	27.6	27.6
GSM1900 GPRS 3 Slots	22.8	22.7	22.7	22.7	22.7	25.8	25.7	25.7	25.7	25.7
GSM1900 GPRS 4 Slots	21.5	21.5	21.5	21.6	21.5	24.5	24.6	24.5	24.5	24.5
GSM1900 EGPRS 1 Slot	23.1	23.1	23.1	23.2	23.1	26.1	26.1	26.0	26.1	26.1
GSM1900 EGPRS 2 Slots	21.1	21.1	21.0	21.1	21.1	24.1	24.0	24.1	24.0	24.1
GSM1900 EGPRS 3 Slots	19.5	19.5	19.5	19.6	19.5	22.6	22.5	22.5	22.6	22.6
GSM1900 EGPRS 4 Slots	18.1	18.1	18.0	18.1	18.0	21.2	21.1	21.1	21.1	21.2

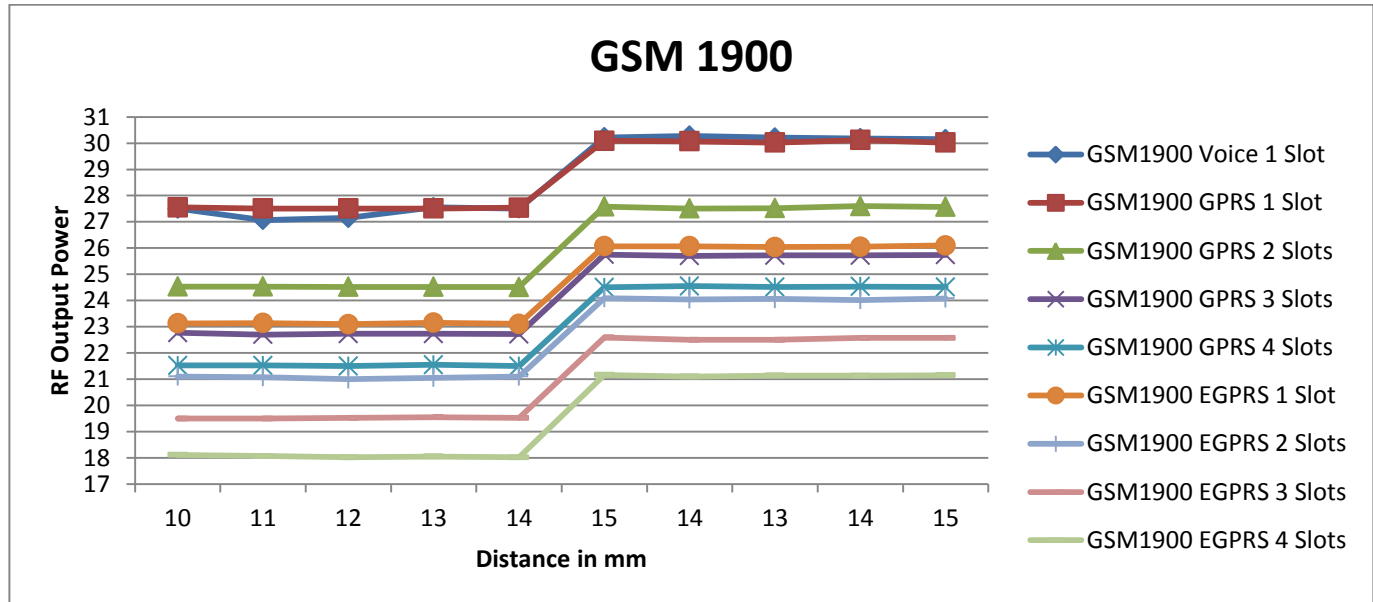

WCDMA Band V/II


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
WCDMA Band V	22.2	22.1	22.2	22.1	22.2	24.1	24.2	24.0	24.0	24.1
WCDMA Band II	19.5	19.5	19.6	19.5	19.5	23.5	23.5	23.5	23.6	23.6

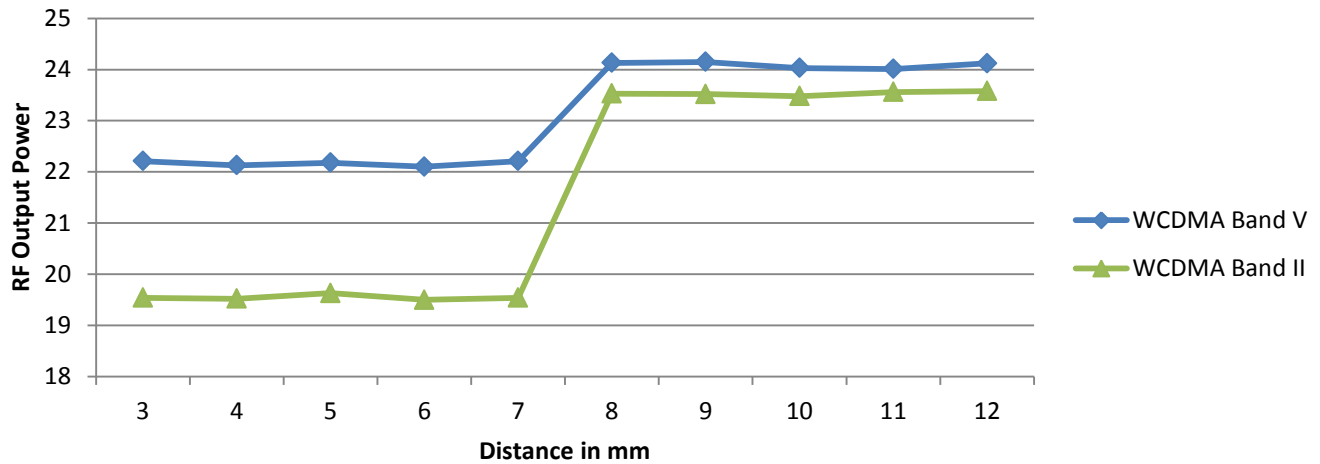WCDMA Bands V / II


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
WCDMA Band V	22.1	22.1	22.1	22.2	22.1	24.0	24.1	24.2	24.0	24.1
WCDMA Band II	19.5	19.6	19.5	19.5	19.5	23.5	23.6	23.5	23.6	23.5

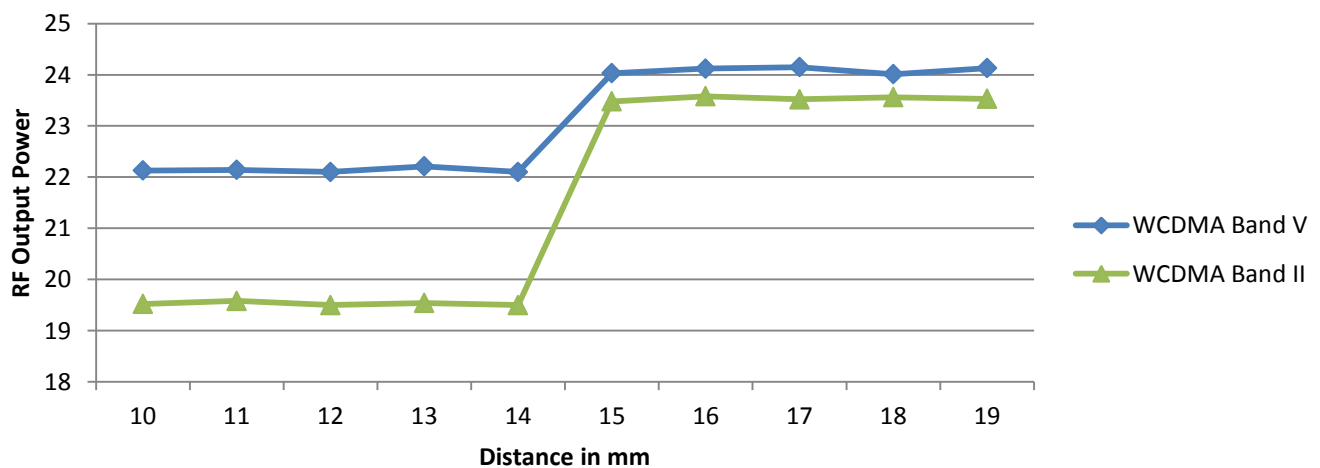WCDMA Bands V / II

Edge 3, DUT Moving Toward (Trigger) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
WCDMA Band V	22.2	22.1	22.2	22.1	22.2	24.1	24.2	24.0	24.0	24.1
WCDMA Band II	19.5	19.5	19.6	19.5	19.5	23.5	23.5	23.5	23.6	23.6

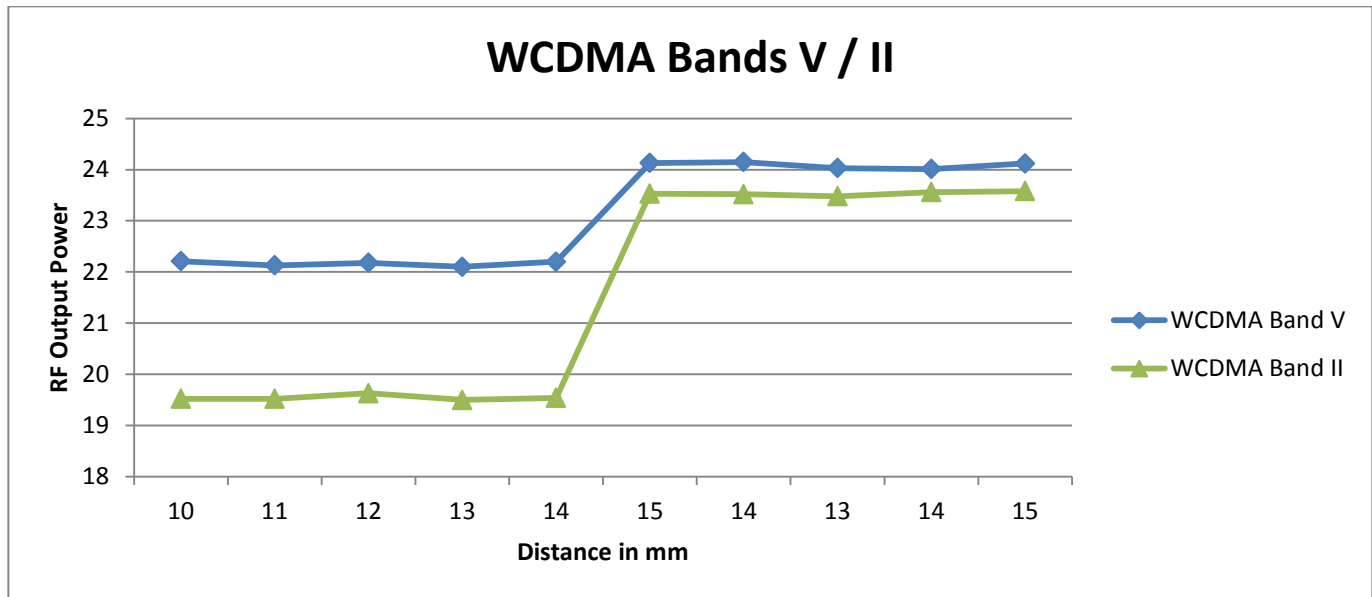

LTE Band 5


Front, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	3	4	5	6	7	8	9	10	11	12
LTE Band 5	22.6	22.6	22.6	22.5	22.6	24.5	24.6	24.6	24.6	24.5

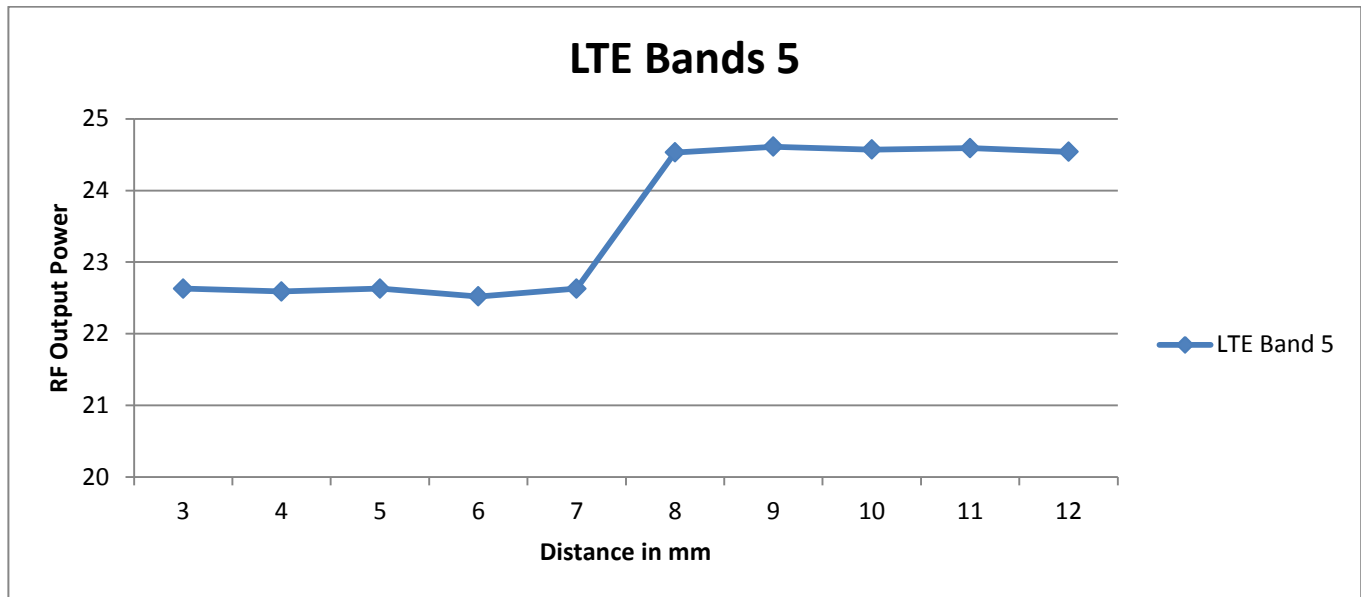


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
LTE Band 5	22.6	22.6	22.5	22.6	22.5	24.6	24.5	24.6	24.6	24.5

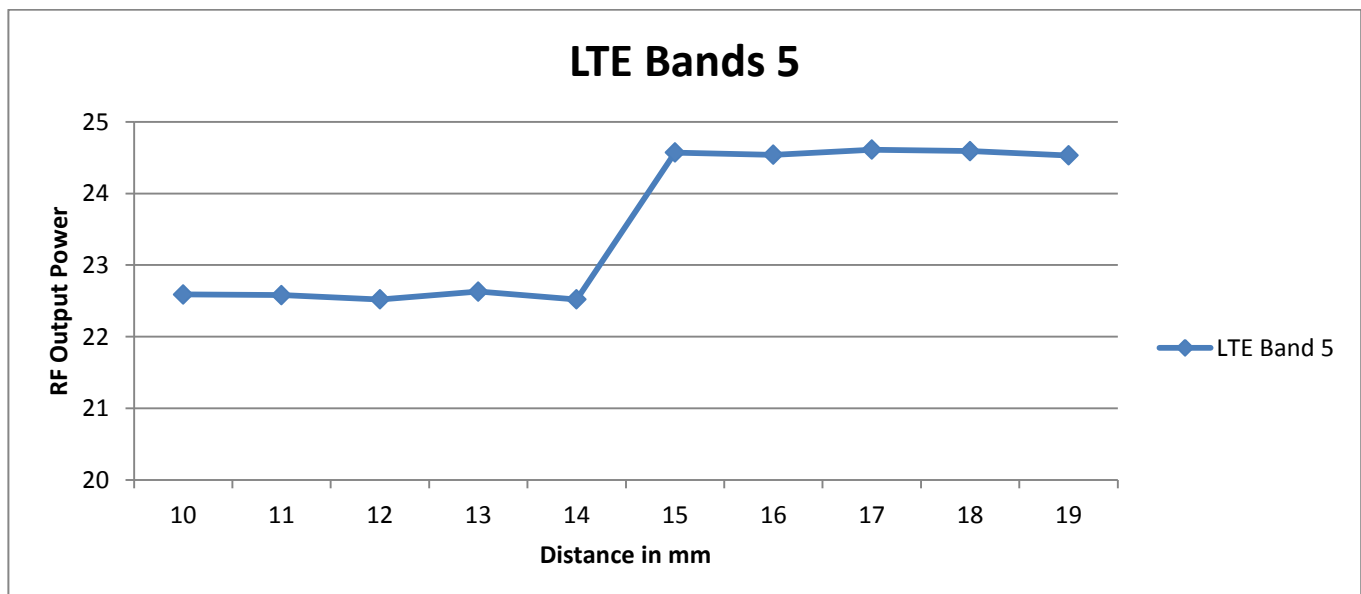

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	14	13	14	15
LTE Band 5	22.6	22.6	22.6	22.5	22.6	24.5	24.6	24.6	24.6	24.5

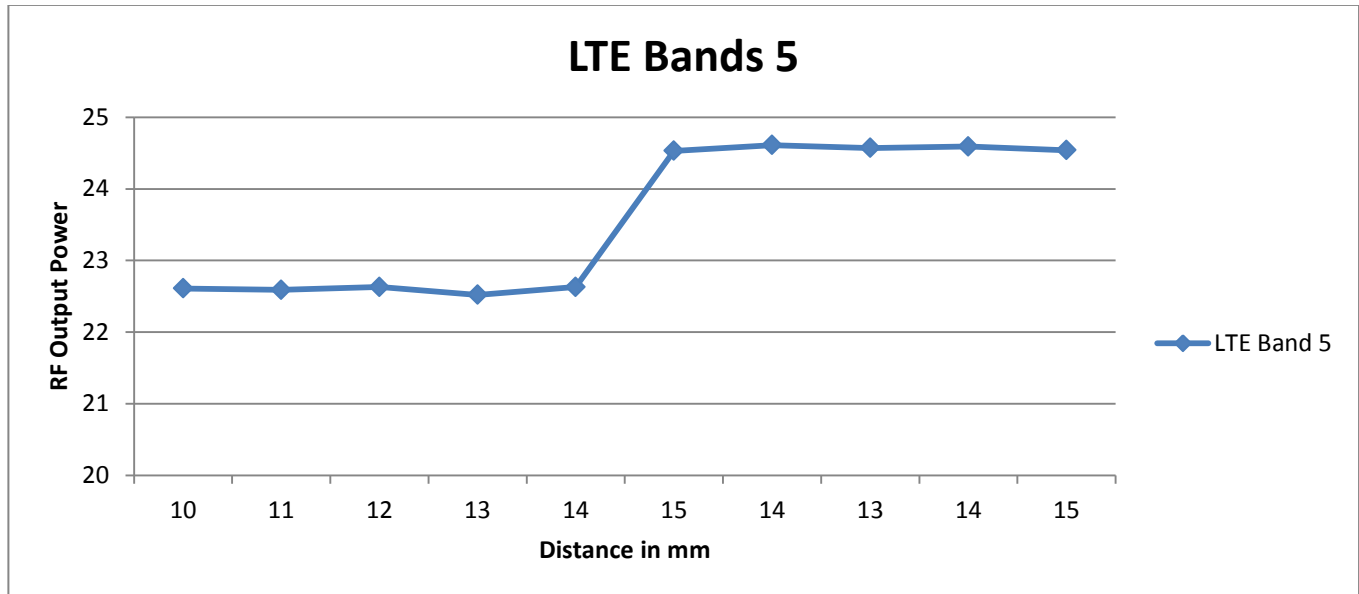

WLAN

Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance	66	67	68	69	70	71	72	73	74	75
2.4 GHz 802.11b	13.1	13.1	13.1	13.1	13.1	19.2	19.2	19.1	19.1	19.1
2.4 GHz 802.11g	13.1	13.1	13.1	13.1	13.1	13.1	13.2	13.1	13.2	13.2
2.4 GHz 802.11n	13.1	13.1	13.1	13.1	13.1	13.2	13.2	13.2	13.1	13.2
5 GHz 802.11a	11.2	11.1	11.2	11.1	11.1	18.1	18.1	18.0	18.0	18.1
5 GHz 802.11n HT20	11.1	11.2	11.1	11.1	11.1	18.1	18.1	18.1	18.2	18.1
5 GHz 802.11n HT40	11.1	11.1	11.1	11.1	11.1	15.1	15.2	15.2	15.1	15.2

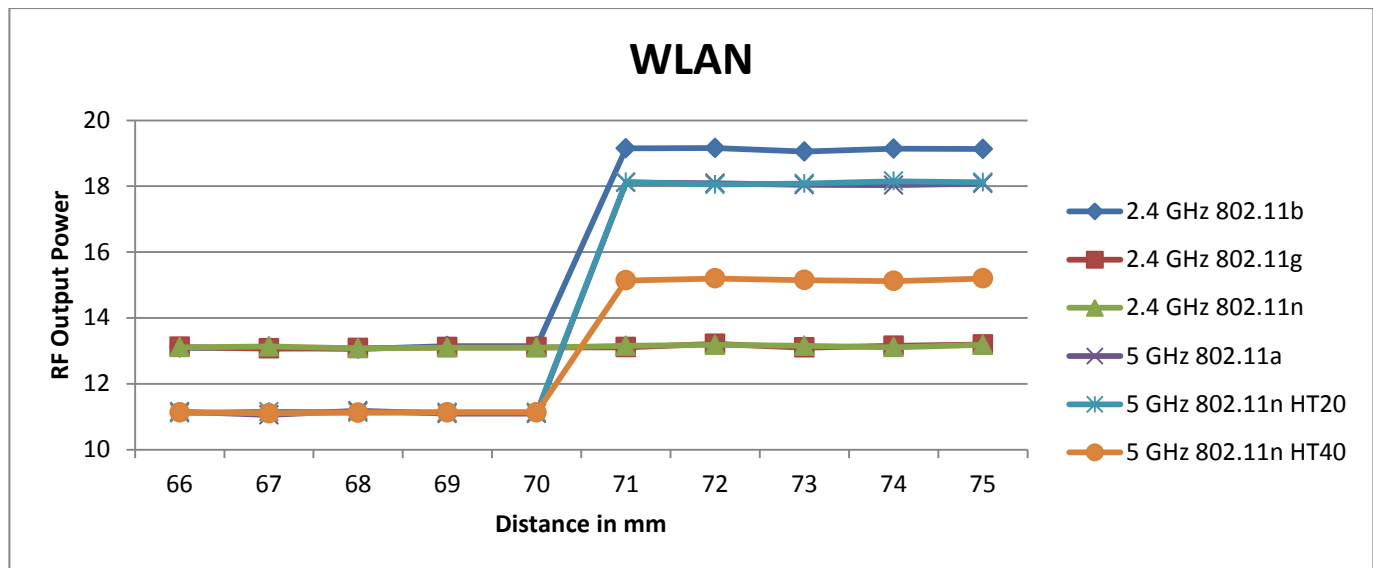


6.5.2 Proximity Sensor Coverage (KDB 616217 §6.3)

Except WLAN, As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

6.5.3 Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 3 parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 3 for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

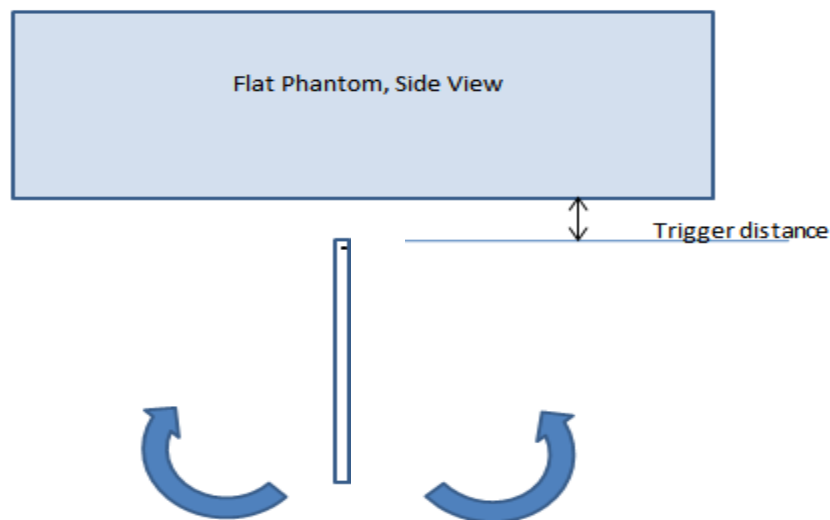

Proximity sensor tilt angle assessment (Edge 3) KDB 616217 §6.4

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Edge 1)

Band (MHz)	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over $\pm 45^\circ$	Power reduction status										
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
850	14 mm	14 mm	On	On	On	On	On	On	On	On	On	On	On
1900	14 mm	14 mm	On	On	On	On	On	On	On	On	On	On	On

6.5.4 Resulting test positions for SAR measurements

Wireless technologies	DUT Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
WWAN	Front	7 mm	N/A	7 mm	6 mm
	Rear	14 mm	N/A	14 mm	13 mm
	Edge 3	14 mm	N/A	14 mm	13 mm
WLAN	Front	70 mm	N/A	70 mm	69 mm

Notes:

1. Worst case distance for WLAN SAR is not considered for body exposure condition. Because Power reduction is applied only voice or VoIP held to ear scenarios.
2. For WLAN, This proximity sensor is only operating in Head exposure condition. So tilt (15 degree) position of Head exposure was additional verified.

7 RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
	Phablet-10g	0 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Phablet-10g	0 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Phablet SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g Phablet SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Phablet SAR is required for all surfaces and Edges within 25mm of the antenna.

8 Dielectric Property Measurements & System Check

8.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)
3-1-2018	Head 5180	e'	36.6600	Relative Permittivity (ϵ_r):	36.66	36.01	1.80	5
		e"	15.5600	Conductivity (σ):	4.48	4.63	-3.21	5
	Head 5300	e'	36.6300	Relative Permittivity (ϵ_r):	36.63	35.88	2.10	5
		e"	15.5800	Conductivity (σ):	4.59	4.75	-3.41	5
	Head 5600	e'	36.2100	Relative Permittivity (ϵ_r):	36.21	35.53	1.90	5
		e"	15.7100	Conductivity (σ):	4.89	5.06	-3.33	5
	Head 5800	e'	36.0000	Relative Permittivity (ϵ_r):	36.00	35.30	1.98	5
		e"	15.8600	Conductivity (σ):	5.11	5.27	-2.94	5
	Head 5825	e'	35.9600	Relative Permittivity (ϵ_r):	35.96	35.30	1.87	5
		e"	15.8600	Conductivity (σ):	5.14	5.27	-2.53	5
3-1-2018	Body 5180	e'	48.0800	Relative Permittivity (ϵ_r):	48.08	49.05	-1.97	5
		e"	18.5900	Conductivity (σ):	5.35	5.27	1.57	5
	Body 5300	e'	47.8700	Relative Permittivity (ϵ_r):	47.87	48.88	-2.07	5
		e"	18.7000	Conductivity (σ):	5.51	5.41	1.84	5
	Body 5600	e'	47.3600	Relative Permittivity (ϵ_r):	47.36	48.48	-2.31	5
		e"	19.0000	Conductivity (σ):	5.92	5.76	2.69	5
	Body 5800	e'	47.0300	Relative Permittivity (ϵ_r):	47.03	48.20	-2.43	5
		e"	19.2200	Conductivity (σ):	6.20	6.00	3.31	5
	Body 5825	e'	46.9900	Relative Permittivity (ϵ_r):	46.99	48.20	-2.51	5
		e"	19.2400	Conductivity (σ):	6.23	6.00	3.86	5
3-7-2018	Head 2450	e'	38.5200	Relative Permittivity (ϵ_r):	38.52	39.20	-1.73	5
		e"	12.9800	Conductivity (σ):	1.77	1.80	-1.76	5
	Head 2400	e'	38.6700	Relative Permittivity (ϵ_r):	38.67	39.30	-1.59	5
		e"	12.8300	Conductivity (σ):	1.71	1.75	-2.26	5
	Head 2480	e'	38.4300	Relative Permittivity (ϵ_r):	38.43	39.16	-1.87	5
		e"	13.0700	Conductivity (σ):	1.80	1.83	-1.64	5
3-9-2018	Head 5180	e'	36.5200	Relative Permittivity (ϵ_r):	36.52	36.01	1.41	5
		e"	15.4900	Conductivity (σ):	4.46	4.63	-3.65	5
	Head 5300	e'	36.4200	Relative Permittivity (ϵ_r):	36.42	35.88	1.52	5
		e"	15.5900	Conductivity (σ):	4.59	4.75	-3.34	5
	Head 5600	e'	36.0600	Relative Permittivity (ϵ_r):	36.06	35.53	1.48	5
		e"	15.7500	Conductivity (σ):	4.90	5.06	-3.08	5
	Head 5800	e'	35.8100	Relative Permittivity (ϵ_r):	35.81	35.30	1.44	5
		e"	15.8900	Conductivity (σ):	5.12	5.27	-2.76	5
	Head 5825	e'	35.7700	Relative Permittivity (ϵ_r):	35.77	35.30	1.33	5
		e"	15.9000	Conductivity (σ):	5.15	5.27	-2.28	5
3-12-2018	Body 1900	e'	54.1500	Relative Permittivity (ϵ_r):	54.15	53.30	1.59	5
		e"	14.9600	Conductivity (σ):	1.58	1.52	3.98	5
	Body 1850	e'	54.3600	Relative Permittivity (ϵ_r):	54.36	53.30	1.99	5
		e"	14.8900	Conductivity (σ):	1.53	1.52	0.77	5
	Body 1910	e'	54.1200	Relative Permittivity (ϵ_r):	54.12	53.30	1.54	5
		e"	14.9800	Conductivity (σ):	1.59	1.52	4.66	5
3-15-2018	Body 1900	e'	53.8000	Relative Permittivity (ϵ_r):	53.80	53.30	0.94	5
		e"	14.7800	Conductivity (σ):	1.56	1.52	2.73	5
	Body 1850	e'	53.9100	Relative Permittivity (ϵ_r):	53.91	53.30	1.14	5
		e"	14.7600	Conductivity (σ):	1.52	1.52	-0.11	5
	Body 1910	e'	53.7800	Relative Permittivity (ϵ_r):	53.78	53.30	0.90	5
		e"	14.7900	Conductivity (σ):	1.57	1.52	3.34	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
2-21-2018	Head 835	e'	41.0900	Relative Permittivity (ϵ_r):	41.09	41.50	-0.99	5
		e"	19.2100	Conductivity (σ):	0.89	0.90	-0.90	5
	Head 820	e'	41.2700	Relative Permittivity (ϵ_r):	41.27	41.60	-0.80	5
		e"	19.2700	Conductivity (σ):	0.88	0.90	-2.21	5
	Head 850	e'	40.9100	Relative Permittivity (ϵ_r):	40.91	41.50	-1.42	5
		e"	19.1600	Conductivity (σ):	0.91	0.92	-1.03	5
2-21-2018	Body 835	e'	54.0500	Relative Permittivity (ϵ_r):	54.05	55.20	-2.08	5
		e"	21.4600	Conductivity (σ):	1.00	0.97	2.72	5
	Body 820	e'	54.1900	Relative Permittivity (ϵ_r):	54.19	55.28	-1.97	5
		e"	21.5300	Conductivity (σ):	0.98	0.97	1.36	5
	Body 850	e'	53.9100	Relative Permittivity (ϵ_r):	53.91	55.16	-2.26	5
		e"	21.3800	Conductivity (σ):	1.01	0.99	2.36	5
2-24-2018	Head 835	e'	42.5500	Relative Permittivity (ϵ_r):	42.55	41.50	2.53	5
		e"	19.5600	Conductivity (σ):	0.91	0.90	0.90	5
	Head 820	e'	42.6900	Relative Permittivity (ϵ_r):	42.69	41.60	2.61	5
		e"	19.5200	Conductivity (σ):	0.89	0.90	-0.94	5
	Head 850	e'	42.3800	Relative Permittivity (ϵ_r):	42.38	41.50	2.12	5
		e"	19.5100	Conductivity (σ):	0.92	0.92	0.78	5
2-24-2018	Body 835	e'	52.9600	Relative Permittivity (ϵ_r):	52.96	55.20	-4.06	5
		e"	21.4600	Conductivity (σ):	1.00	0.97	2.72	5
	Body 820	e'	53.1000	Relative Permittivity (ϵ_r):	53.10	55.28	-3.94	5
		e"	21.5000	Conductivity (σ):	0.98	0.97	1.22	5
	Body 850	e'	52.8100	Relative Permittivity (ϵ_r):	52.81	55.16	-4.26	5
		e"	21.4100	Conductivity (σ):	1.01	0.99	2.51	5
2-26-2018	Head 2450	e'	39.3000	Relative Permittivity (ϵ_r):	39.30	39.20	0.26	5
		e"	13.6400	Conductivity (σ):	1.86	1.80	3.23	5
	Head 2400	e'	39.4600	Relative Permittivity (ϵ_r):	39.46	39.30	0.42	5
		e"	13.5500	Conductivity (σ):	1.81	1.75	3.23	5
	Head 2480	e'	39.2200	Relative Permittivity (ϵ_r):	39.22	39.16	0.15	5
		e"	13.7300	Conductivity (σ):	1.89	1.83	3.32	5
3-5-2018	Body 2450	e'	52.7900	Relative Permittivity (ϵ_r):	52.79	52.70	0.17	5
		e"	14.6700	Conductivity (σ):	2.00	1.95	2.49	5
	Body 2400	e'	52.8900	Relative Permittivity (ϵ_r):	52.89	52.77	0.22	5
		e"	14.5400	Conductivity (σ):	1.94	1.90	2.23	5
	Body 2480	e'	52.7000	Relative Permittivity (ϵ_r):	52.70	52.66	0.07	5
		e"	14.7200	Conductivity (σ):	2.03	1.99	1.89	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)	
2-21-2018	Head 1900	e'	38.6600	Relative Permittivity (ϵ_r):	38.66	40.00	-3.35	5	
		e"	13.5800	Conductivity (σ):	1.43	1.40	2.48	5	
	Head 1850	e'	38.8700	Relative Permittivity (ϵ_r):	38.87	40.00	-2.83	5	
		e"	13.4600	Conductivity (σ):	1.38	1.40	-1.10	5	
	Head 1910	e'	38.6200	Relative Permittivity (ϵ_r):	38.62	40.00	-3.45	5	
		e"	13.6300	Conductivity (σ):	1.45	1.40	3.40	5	
2-21-2018	Body 1900	e'	54.0400	Relative Permittivity (ϵ_r):	54.04	53.30	1.39	5	
		e"	14.5300	Conductivity (σ):	1.54	1.52	0.99	5	
	Body 1850	e'	54.1400	Relative Permittivity (ϵ_r):	54.14	53.30	1.58	5	
		e"	14.4700	Conductivity (σ):	1.49	1.52	-2.07	5	
	Body 1910	e'	54.0000	Relative Permittivity (ϵ_r):	54.00	53.30	1.31	5	
		e"	14.5400	Conductivity (σ):	1.54	1.52	1.59	5	
2-24-2018	Head 1900	e'	39.7500	Relative Permittivity (ϵ_r):	39.75	40.00	-0.63	5	
		e"	13.4500	Conductivity (σ):	1.42	1.40	1.50	5	
	Head 1850	e'	39.8700	Relative Permittivity (ϵ_r):	39.87	40.00	-0.33	5	
		e"	13.4300	Conductivity (σ):	1.38	1.40	-1.32	5	
	Head 1910	e'	39.7200	Relative Permittivity (ϵ_r):	39.72	40.00	-0.70	5	
		e"	13.4700	Conductivity (σ):	1.43	1.40	2.18	5	
2-24-2018	Body 1900	e'	54.3400	Relative Permittivity (ϵ_r):	54.34	53.30	1.95	5	
		e"	14.9600	Conductivity (σ):	1.58	1.52	3.98	5	
	Body 1850	e'	54.4200	Relative Permittivity (ϵ_r):	54.42	53.30	2.10	5	
		e"	14.8700	Conductivity (σ):	1.53	1.52	0.63	5	
	Body 1910	e'	54.3100	Relative Permittivity (ϵ_r):	54.31	53.30	1.89	5	
		e"	14.9700	Conductivity (σ):	1.59	1.52	4.59	5	
3-5-2018	Body 5250	e'	50.1600	Relative Permittivity (ϵ_r):	50.16	48.95	2.47	5	
		e"	18.0100	Conductivity (σ):	5.26	5.35	-1.79	5	
	Body 5260	e'	50.1600	Relative Permittivity (ϵ_r):	50.16	48.94	2.50	5	
		e"	18.0400	Conductivity (σ):	5.28	5.36	-1.65	5	
	Body 5600	e'	49.6900	Relative Permittivity (ϵ_r):	49.69	48.48	2.50	5	
		e"	18.3300	Conductivity (σ):	5.71	5.76	-0.93	5	
	Body 5750	e'	49.5400	Relative Permittivity (ϵ_r):	49.54	48.27	2.62	5	
		e"	18.4500	Conductivity (σ):	5.90	5.94	-0.62	5	
	Body 5825	e'	49.3700	Relative Permittivity (ϵ_r):	49.37	48.20	2.43	5	
		e"	18.5600	Conductivity (σ):	6.01	6.00	0.19	5	
	3-8-2018	Body 5250	e'	48.7700	Relative Permittivity (ϵ_r):	48.77	48.95	-0.37	5
			e"	18.8300	Conductivity (σ):	5.50	5.35	2.69	5
Body 5260		e'	48.7500	Relative Permittivity (ϵ_r):	48.75	48.94	-0.38	5	
		e"	18.8500	Conductivity (σ):	5.51	5.36	2.77	5	
Body 5600		e'	48.1900	Relative Permittivity (ϵ_r):	48.19	48.48	-0.59	5	
		e"	19.1500	Conductivity (σ):	5.96	5.76	3.50	5	
Body 5750		e'	47.9600	Relative Permittivity (ϵ_r):	47.96	48.27	-0.65	5	
		e"	19.3100	Conductivity (σ):	6.17	5.94	4.01	5	
Body 5825		e'	47.8300	Relative Permittivity (ϵ_r):	47.83	48.20	-0.77	5	
		e"	19.3800	Conductivity (σ):	6.28	6.00	4.62	5	
3-12-2018		Body 2450	e'	50.9700	Relative Permittivity (ϵ_r):	50.97	52.70	-3.28	5
			e"	14.7300	Conductivity (σ):	2.01	1.95	2.90	5
	Body 2400	e'	51.0700	Relative Permittivity (ϵ_r):	51.07	52.77	-3.23	5	
		e"	14.6100	Conductivity (σ):	1.95	1.90	2.72	5	
	Body 2480	e'	50.8800	Relative Permittivity (ϵ_r):	50.88	52.66	-3.38	5	
		e"	14.8100	Conductivity (σ):	2.04	1.99	2.51	5	

8.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d194	7-19-2017	835	1g	9.33	9.30
				10g	6.03	6.09
D1900V2	5d190	9-20-2017	1900	1g	38.30	40.00
				10g	20.10	21.10
D2450V2	939	9-19-2017	2450	1g	52.30	50.70
				10g	24.60	23.90
D5GHzV2	1184	8-23-2017	5300	1g	81.30	76.40
				10g	23.20	21.30
D5GHzV2	1184	8-23-2017	5500	1g	80.60	77.10
				10g	22.90	21.30
D5GHzV2	1184	8-23-2017	5600	1g	82.30	79.20
				10g	23.40	22.20
D5GHzV2	1184	8-23-2017	5800	1g	78.10	76.40
				10g	22.20	21.20
D5GHzV2	1209	2-15-2018	5250	1g	80.80	75.70
				10g	23.10	21.00
D5GHzV2	1209	2-15-2018	5600	1g	83.40	79.00
				10g	23.80	21.90
D5GHzV2	1209	2-15-2018	5750	1g	80.70	75.60
				10g	22.90	20.80

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
3-1-2018	D5GHzV2 (5300)	1184	Head	1g	7.64	76.40	81.30	-6.03
				10g	2.16	21.60	23.20	-6.90
3-1-2018	D5GHzV2 (5500)	1184	Head	1g	7.58	75.80	80.60	-5.96
				10g	2.16	21.60	22.90	-5.68
3-1-2018	D5GHzV2 (5600)	1184	Head	1g	8.03	80.30	82.30	-2.43
				10g	2.27	22.70	23.40	-2.99
3-1-2018	D5GHzV2 (5800)	1184	Head	1g	7.49	74.90	78.10	-4.10
				10g	2.12	21.20	22.20	-4.50
3-1-2018	D5GHzV2 (5300)	1184	Body	1g	8.18	81.80	76.40	7.07
				10g	2.30	23.00	21.30	7.98
3-1-2018	D5GHzV2 (5500)	1184	Body	1g	8.29	82.90	77.10	7.52
				10g	2.31	23.10	21.30	8.45
3-1-2018	D5GHzV2 (5600)	1184	Body	1g	8.05	80.50	79.20	1.64
				10g	2.26	22.60	22.20	1.80
3-1-2018	D5GHzV2 (5800)	1184	Body	1g	7.57	75.70	76.40	-0.92
				10g	2.11	21.10	21.20	-0.47
3-7-2018	D2450V2	939	Head	1g	5.31	53.10	52.30	1.53
				10g	2.43	24.30	24.60	-1.22
3-9-2018	D5GHzV2 (5300)	1184	Head	1g	7.56	75.60	81.30	-7.01
				10g	2.13	21.30	23.20	-8.19
3-9-2018	D5GHzV2 (5500)	1184	Head	1g	7.72	77.20	80.60	-4.22
				10g	2.21	22.10	22.90	-3.49
3-9-2018	D5GHzV2 (5600)	1184	Head	1g	7.69	76.90	82.30	-6.56
				10g	2.18	21.80	23.40	-6.84
3-9-2018	D5GHzV2 (5800)	1184	Head	1g	7.32	73.20	78.10	-6.27
				10g	2.07	20.70	22.20	-6.76
3-12-2018	D1900V2	5d190	Body	1g	4.05	40.50	40.00	1.25
				10g	2.06	20.60	21.10	-2.37
3-15-2018	D1900V2	5d190	Body	1g	4.07	40.70	40.00	1.75
				10g	2.09	20.90	21.10	-0.95

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2-21-2018	D835V2	4d194	Head	1g	0.94	9.41	9.33	0.86
				10g	0.62	6.17	6.03	2.32
2-21-2018	D835V2	4d194	Body	1g	1.01	10.10	9.30	8.60
				10g	0.66	6.61	6.09	8.54
2-24-2018	D835V2	4d194	Head	1g	0.93	9.25	9.33	-0.86
				10g	0.61	6.07	6.03	0.66
2-24-2018	D835V2	4d194	Body	1g	1.01	10.10	9.30	8.60
				10g	0.66	6.64	6.09	9.03
2-26-2018	D2450V2	939	Head	1g	5.45	54.50	52.30	4.21
				10g	2.51	25.10	24.60	2.03
3-5-2018	D2450V2	939	Body	1g	5.15	51.50	50.70	1.58
				10g	2.35	23.50	23.90	-1.67

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2-21-2018	D1900V2	5d190	Head	1g	4.06	40.60	38.30	6.01
				10g	2.06	20.60	20.10	2.49
2-21-2018	D1900V2	5d190	Body	1g	3.97	39.70	40.00	-0.75
				10g	2.03	20.30	21.10	-3.79
2-24-2018	D1900V2	5d190	Head	1g	3.85	38.50	38.30	0.52
				10g	1.98	19.80	20.10	-1.49
2-24-2018	D1900V2	5d190	Body	1g	4.06	40.60	40.00	1.50
				10g	2.08	20.80	21.10	-1.42
3-5-2018	D5GHzV2 (5250)	1209	Body	1g	7.14	71.40	75.70	-5.68
				10g	2.01	20.10	21.00	-4.29
3-5-2018	D5GHzV2 (5600)	1209	Body	1g	7.58	75.80	79.00	-4.05
				10g	2.13	21.30	21.90	-2.74
3-5-2018	D5GHzV2 (5750)	1209	Body	1g	6.94	69.40	75.60	-8.20
				10g	1.94	19.40	20.80	-6.73
3-8-2018	D5GHzV2 (5250)	1209	Body	1g	6.92	69.20	75.70	-8.59
				10g	1.95	19.50	21.00	-7.14
3-8-2018	D5GHzV2 (5600)	1209	Body	1g	7.72	77.20	79.00	-2.28
				10g	2.17	21.70	21.90	-0.91
3-8-2018	D5GHzV2 (5750)	1209	Body	1g	6.87	68.70	75.60	-9.13
				10g	1.92	19.20	20.80	-7.69
3-12-2018	D2450V2	939	Body	1g	4.89	48.90	50.70	-3.55
				10g	2.23	22.30	23.90	-6.69

9 Conducted Output Power Measurements

9.1 GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity sensor back-off		
					Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.4	33.8	24.8	25.0	32.1	23.0	23.5	31.7	22.7	23.5
			190	836.6	33.9	24.8		32.2	23.2		31.8	22.8	
			251	848.8	33.9	24.8		31.6	22.6		31.8	22.7	
GPRS (GMSK)	CS1	1	128	824.4	33.8	24.8	25.0	32.1	23.1	23.5	31.6	22.6	23.5
			190	836.6	33.7	24.6		32.2	23.2		31.5	22.4	
			251	848.8	33.6	24.6		31.7	22.6		31.4	22.4	
		2	128	824.4	31.0	25.0	25.5	28.9	22.8	23.5	28.8	22.8	23.5
			190	836.6	31.0	25.0		28.8	22.8		28.7	22.7	
			251	848.8	30.9	24.9		28.7	22.7		28.6	22.6	
		3	128	824.4	29.2	24.9	25.4	26.6	22.4	23.4	26.7	22.4	23.4
			190	836.6	29.2	24.9		26.6	22.4		26.6	22.4	
			251	848.8	29.1	24.8		26.6	22.3		26.5	22.3	
		4	128	824.4	27.5	24.5	25.5	25.2	22.2	23.5	25.2	22.1	23.5
			190	836.6	27.5	24.5		25.2	22.2		25.2	22.1	
			251	848.8	27.5	24.5		25.2	22.2		25.0	22.0	
EGPRS (8PSK)	MCS5	1	128	824.4	26.9	17.9	18.5	24.9	15.9	16.5	25.1	16.1	16.5
			190	836.6	27.0	18.0		25.1	16.0		25.3	16.2	
			251	848.8	27.0	17.9		25.0	15.9		25.2	16.1	
		2	128	824.4	24.7	18.7	19.5	22.7	16.7	17.5	23.0	17.0	17.5
			190	836.6	24.9	18.8		22.9	16.9		23.1	17.1	
			251	848.8	24.8	18.8		22.8	16.8		23.0	17.0	
		3	128	824.4	22.6	18.4	19.2	21.8	17.5	17.7	22.0	17.7	17.7
			190	836.6	22.8	18.5		22.0	17.7		22.0	17.7	
			251	848.8	22.7	18.5		21.9	17.7		22.0	17.7	
		4	128	824.4	22.6	19.6	20.5	20.6	17.6	18.0	20.8	17.8	18.0
			190	836.6	22.7	19.7		20.8	17.8		21.0	18.0	
			251	848.8	22.8	19.8		20.8	17.8		20.9	17.9	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power and 4 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity sensor back-off		
					Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.4	21.3	21.5	27.5	18.5	19.0	27.6	18.5	19.0
			661	1880.0	30.5	21.5		27.8	18.8		27.8	18.8	
			810	1909.8	30.5	21.5		27.7	18.7		27.6	18.5	
GPRS (GMSK)	CS1	1	512	1850.2	30.3	21.3	21.5	27.5	18.4	19.0	27.5	18.5	19.0
			661	1880.0	30.3	21.3		27.8	18.7		27.5	18.5	
			810	1909.8	30.3	21.3		27.7	18.7		27.3	18.2	
		2	512	1850.2	27.9	21.9	22.0	24.8	18.8	19.0	24.6	18.6	19.0
			661	1880.0	27.9	21.9		24.7	18.7		24.6	18.6	
			810	1909.8	27.6	21.6		24.6	18.6		24.5	18.5	
		3	512	1850.2	25.7	21.4	21.9	22.6	18.3	18.9	22.5	18.2	18.9
			661	1880.0	25.8	21.5		22.7	18.4		22.4	18.2	
			810	1909.8	25.5	21.3		22.5	18.3		22.3	18.1	
		4	512	1850.2	24.0	21.0	22.0	20.9	17.9	19.0	20.8	17.8	19.0
			661	1880.0	24.2	21.2		21.1	18.1		20.9	17.9	
			810	1909.8	24.0	21.0		21.0	18.0		20.7	17.7	
EGPRS (8PSK)	MCS5	1	512	1850.2	25.6	16.5	17.5	22.7	13.7	14.5	22.8	13.8	14.5
			661	1880.0	25.7	16.7		22.7	13.7		22.8	13.8	
			810	1909.8	25.6	16.6		22.6	13.5		22.7	13.6	
		2	512	1850.2	23.3	17.3	18.5	20.4	14.4	15.5	20.6	14.6	15.5
			661	1880.0	23.4	17.4		20.5	14.5		20.6	14.6	
			810	1909.8	23.3	17.3		20.3	14.3		20.3	14.3	
		3	512	1850.2	21.5	17.3	18.7	18.6	14.4	15.7	18.7	14.5	15.7
			661	1880.0	21.6	17.3		18.7	14.4		18.7	14.4	
			810	1909.8	21.5	17.2		18.5	14.3		18.6	14.4	
		4	512	1850.2	19.7	16.7	18.5	16.7	13.7	15.5	16.8	13.8	15.5
			661	1880.0	19.8	16.8		16.8	13.8		16.9	13.9	
			810	1909.8	19.7	16.7		16.7	13.7		16.7	13.7	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power and 4 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

9.2 W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13.
A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

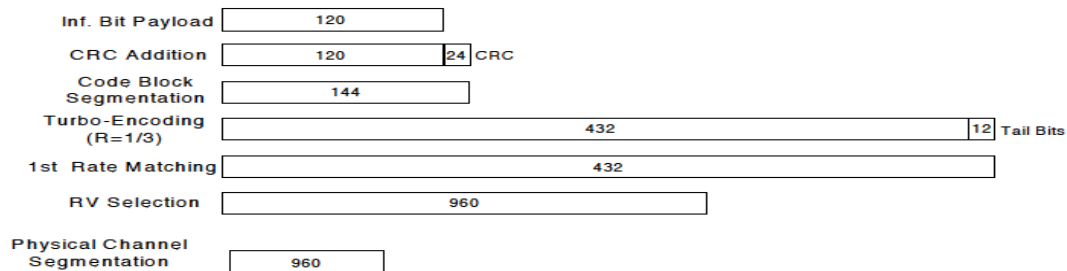**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 12			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7. Therefore, the RF conducted power is not measured.

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. RF output power (dBm)	Reduced. RF output power Hotspot back-off (dBm)	Reduced. RF output power Proximity sensor back-off (dBm)
						Meas. Avg Pwr	Meas. Avg Pwr	Meas. Avg Pwr
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	23.5	19.4	19.4
			9400	1880.0		23.6	19.6	19.6
			9538	1907.6		23.3	19.3	19.4
	HSDPA	Subtest 1	9262	1852.4	0	22.4	18.4	18.4
			9400	1880.0		22.6	18.6	18.6
			9538	1907.6		22.3	18.3	18.3
		Subtest 2	9262	1852.4	0	22.3	18.2	18.4
			9400	1880.0		22.4	18.4	18.6
			9538	1907.6		22.2	18.0	18.3
		Subtest 3	9262	1852.4	0.5	22.0	17.9	17.9
			9400	1880.0		22.1	18.1	18.1
			9538	1907.6		21.8	17.8	17.8
		Subtest 4	9262	1852.4	0.5	22.0	17.9	17.9
			9400	1880.0		22.1	18.1	18.1
			9538	1907.6		21.8	17.8	17.8
	HSUPA	Subtest 1	9262	1852.4	0	22.5	18.4	18.4
			9400	1880.0		22.6	18.6	18.6
			9538	1907.6		22.4	18.3	18.3
		Subtest 2	9262	1852.4	2	20.4	16.4	16.4
			9400	1880.0		20.6	16.6	16.6
			9538	1907.6		20.3	16.3	16.3
		Subtest 3	9262	1852.4	1	21.5	17.4	17.4
			9400	1880.0		21.6	17.6	17.6
			9538	1907.6		21.3	17.3	17.3
		Subtest 4	9262	1852.4	2	20.5	16.4	16.4
			9400	1880.0		20.6	16.6	16.6
			9538	1907.6		20.3	16.3	16.3
		Subtest 5	9262	1852.4	0	22.5	18.4	18.5
			9400	1880.0		22.6	18.6	18.6
			9538	1907.6		22.3	18.3	18.4
	DC-HSDPA	Subtest 1	9262	1852.4	0	22.5	18.5	18.5
			9400	1880.0		22.6	18.6	18.6
			9538	1907.6		22.3	18.3	17.8
		Subtest 2	9262	1852.4	0	22.5	18.4	18.4
			9400	1880.0		22.6	18.6	18.6
			9538	1907.6		22.3	18.3	18.3
		Subtest 3	9262	1852.4	0.5	22.0	17.9	17.9
			9400	1880.0		22.1	18.1	18.1
			9538	1907.6		21.8	17.8	17.8
		Subtest 4	9262	1852.4	0.5	22.0	17.9	17.9
			9400	1880.0		22.1	18.1	18.1
			9538	1907.6		21.8	17.8	17.8

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. RF output power (dBm)	Reduced. RF output power Hotspot back-off (dBm)	Reduced. RF output power Proximity sensor back-off (dBm)
						Meas. Avg Pwr	Meas. Avg Pwr	Meas. Avg Pwr
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.1	22.0	22.1
			4183	836.6		24.1	22.1	22.1
			4233	846.6		24.1	22.1	22.1
	HSDPA	Subtest 1	4132	826.4	0	23.0	21.0	21.0
			4183	836.6		23.1	21.0	21.1
			4233	846.6		23.1	21.1	21.1
		Subtest 2	4132	826.4	0	23.0	21.0	21.1
			4183	836.6		23.1	21.0	21.1
			4233	846.6		23.1	21.1	21.1
		Subtest 3	4132	826.4	0.5	22.5	20.5	20.6
			4183	836.6		22.6	20.5	20.6
			4233	846.6		22.6	20.5	20.6
		Subtest 4	4132	826.4	0.5	22.5	20.5	20.6
			4183	836.6		22.6	20.5	20.6
			4233	846.6		22.6	20.5	20.6
	HSUPA	Subtest 1	4132	826.4	0	23.0	21.0	21.1
			4183	836.6		23.1	21.0	21.2
			4233	846.6		23.1	21.1	21.2
		Subtest 2	4132	826.4	2	21.0	19.0	19.1
			4183	836.6		21.1	19.1	19.2
			4233	846.6		21.1	19.1	19.2
		Subtest 3	4132	826.4	1	22.0	20.0	20.1
			4183	836.6		22.1	20.1	20.2
			4233	846.6		22.1	20.1	20.2
		Subtest 4	4132	826.4	2	21.0	19.0	19.1
			4183	836.6		21.1	19.0	19.2
			4233	846.6		21.1	19.1	19.2
		Subtest 5	4132	826.4	0	23.0	21.0	21.1
			4183	836.6		23.1	21.1	21.2
			4233	846.6		23.1	21.1	21.1
	DC-HSDPA	Subtest 1	4132	826.4	0	23.0	21.0	21.1
			4183	836.6		23.1	21.0	21.1
			4233	846.6		23.1	21.0	21.1
		Subtest 2	4132	826.4	0	23.0	21.0	21.1
			4183	836.6		23.1	21.1	21.1
			4233	846.6		23.1	21.0	21.1
		Subtest 3	4132	826.4	0.5	22.5	20.5	20.6
			4183	836.6		22.6	20.5	20.6
			4233	846.6		22.6	20.6	20.6
		Subtest 4	4132	826.4	0.5	22.5	20.5	20.6
			4183	836.6		22.6	20.6	20.6
			4233	846.6		22.6	20.6	20.6

9.3 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3, 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10	6.6.2.2.1, 6.6.3.3.13	20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.3.3.15				
NS_21	6.6.2.2.1, 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
	6.6.3.3.26				
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 5 Measured Results - Max power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0		24.4	
			1	25	0		24.3	
			1	49	0		24.7	
			25	0	1		23.4	
			25	12	1		23.4	
			25	25	1		23.4	
		16QAM	50	0	1		23.5	
			1	0	1		23.8	
			1	25	1		23.8	
			1	49	1		23.7	
			25	0	2		22.4	
			25	12	2		22.4	
			25	25	2		22.4	
			50	0	2		22.4	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	24.3	24.4	24.4
			1	12	0	24.2	24.4	24.4
			1	24	0	24.3	24.4	24.4
			12	0	1	23.4	23.3	23.4
			12	7	1	23.3	23.4	23.4
			12	13	1	23.4	23.3	23.3
			25	0	1	23.4	23.4	23.4
		16QAM	1	0	1	23.9	23.5	23.5
			1	12	1	23.8	23.4	23.4
			1	24	1	23.8	23.4	23.4
			12	0	2	22.5	22.4	22.5
			12	7	2	22.5	22.4	22.5
			12	13	2	22.5	22.4	22.4
			25	0	2	22.4	22.4	22.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	24.2	24.3	24.3
			1	8	0	24.2	24.3	24.4
			1	14	0	24.3	24.3	24.3
			8	0	1	23.3	23.3	23.4
			8	4	1	23.4	23.4	23.4
			8	7	1	23.4	23.3	23.4
			15	0	1	23.3	23.3	23.4
		16QAM	1	0	1	23.2	23.4	23.9
			1	8	1	23.2	23.4	23.9
			1	14	1	23.3	23.3	23.7
			8	0	2	22.4	22.3	22.4
			8	4	2	22.5	22.4	22.5
			8	7	2	22.4	22.4	22.5
			15	0	2	22.4	22.3	22.5

LTE Band 5 Measured Results - Max power (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	24.1	24.4	24.3
			1	3	0	24.4	24.4	24.3
			1	5	0	24.3	24.3	24.4
			3	0	0	24.4	24.4	24.4
			3	1	0	24.4	24.3	24.3
			3	3	0	24.4	24.3	24.3
			6	0	1	23.3	23.2	23.3
		16QAM	1	0	1	23.5	23.3	23.4
			1	3	1	23.3	23.3	23.3
			1	5	1	23.3	23.3	23.3
			3	0	1	23.7	23.7	23.7
			3	1	1	23.7	23.7	23.6
			3	3	1	23.6	23.6	23.7
			6	0	2	22.3	22.3	22.3

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 5 Measured Results - Reduced power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						829 MHz	836.5 MHz	844 MHz	829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0		22.4			22.3	
			1	25	0		22.2			22.2	
			1	49	0		22.7			22.6	
			25	0	0		22.3			22.3	
			25	12	0		22.4			22.4	
			25	25	0		22.4			22.4	
			50	0	0		22.4			22.4	
		16QAM	1	0	0		22.3			22.3	
			1	25	0		22.2			22.2	
			1	49	0		22.5			22.6	
			25	0	0		22.4			22.3	
			25	12	0		22.4			22.4	
			25	25	0		22.4			22.4	
			50	0	0		22.4			22.4	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.4	22.2	22.5	22.2	22.4	22.4
			1	12	0	22.3	22.2	22.5	22.2	22.3	22.3
			1	24	0	22.3	22.2	22.4	22.2	22.2	22.4
			12	0	0	22.3	22.3	22.3	22.3	22.3	22.3
			12	7	0	22.4	22.3	22.4	22.3	22.3	22.3
			12	13	0	22.3	22.3	22.4	22.3	22.3	22.3
			25	0	0	22.4	22.3	22.4	22.3	22.3	22.3
		16QAM	1	0	0	22.5	22.8	22.5	22.8	22.4	22.5
			1	12	0	22.4	22.8	22.4	22.8	22.3	22.4
			1	24	0	22.5	22.8	22.5	22.8	22.4	22.4
			12	0	0	22.4	22.4	22.4	22.5	22.4	22.3
			12	7	0	22.4	22.5	22.4	22.4	22.4	22.4
			12	13	0	22.4	22.4	22.5	22.4	22.4	22.4
			25	0	0	22.3	22.4	22.4	22.4	22.3	22.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.3	22.2	22.3	22.2	22.2	22.3
			1	8	0	22.2	22.3	22.3	22.2	22.2	22.3
			1	14	0	22.3	22.3	22.3	22.2	22.3	22.3
			8	0	0	22.3	22.3	22.3	22.3	22.2	22.3
			8	4	0	22.3	22.3	22.4	22.3	22.3	22.3
			8	7	0	22.3	22.3	22.3	22.2	22.3	22.4
			15	0	0	22.3	22.3	22.3	22.3	22.3	22.3
		16QAM	1	0	0	22.7	22.2	22.2	22.4	22.7	22.3
			1	8	0	22.7	22.2	22.2	22.3	22.7	22.4
			1	14	0	22.7	22.2	22.2	22.3	22.6	22.3
			8	0	0	22.4	22.4	22.4	22.3	22.3	22.4
			8	4	0	22.4	22.4	22.5	22.3	22.4	22.5
			8	7	0	22.4	22.4	22.5	22.3	22.4	22.4
			15	0	0	22.3	22.4	22.4	22.2	22.3	22.4

LTE Band 5 Measured Results - Reduced power (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced. Meas. Avg Pwr Hotspot back-off (dBm)			Reduced. Meas. Avg Pwr Proximity sensor back-off (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.2	22.3	22.4	22.2	22.3	22.2
			1	3	0	22.2	22.3	22.4	22.2	22.3	22.3
			1	5	0	22.2	22.2	22.4	22.2	22.2	22.2
			3	0	0	22.2	22.3	22.2	22.2	22.2	22.2
			3	1	0	22.2	22.3	22.3	22.2	22.2	22.2
			3	3	0	22.2	22.3	22.3	22.2	22.2	22.2
			6	0	0	22.3	22.3	22.3	22.2	22.3	22.3
		16QAM	1	0	0	22.3	22.7	22.4	22.6	22.3	22.3
			1	3	0	22.4	22.7	22.5	22.6	22.4	22.4
			1	5	0	22.3	22.6	22.4	22.6	22.2	22.3
			3	0	0	22.4	22.4	22.3	22.3	22.3	22.3
			3	1	0	22.4	22.5	22.4	22.4	22.3	22.3
			3	3	0	22.4	22.4	22.3	22.4	22.3	22.3
			6	0	0	22.5	22.2	22.5	22.2	22.4	22.4

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.4 Wi-Fi 2.4 GHz (DTS Band)

Measured Results (Max power)

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412	18.5	19.5	Yes
		6	2437	18.7		
		11	2462	18.7		
		12	2467	12.4	13.5	No
		13	2472	12.5	13.5	
802.11g	6 Mbps	1	2412	Not Require	13.5	No
		6	2437			
		11	2462		10.5	
		12	2467			
		13	2472		5.5	
802.11n (HT20)	6.5 Mbps	1	2412	Not Require	13.5	No
		6	2437			
		11	2462		10.5	
		12	2467			
		13	2472		5.5	

Measured Results (Reduced power)

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Reduced Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412	12.5	13.5	Yes
		6	2437	12.6		
		11	2462	13.4		
		12	2467	12.4	13.5	No
		13	2472	12.5	13.5	
802.11g	6 Mbps	1	2412	12.5	13.5	No
		6	2437	12.7		
		11	2462	13.5		
		12	2467	9.6	10.5	
		13	2472	4.9	5.5	
802.11n (HT20)	6.5 Mbps	1	2412	12.6	13.5	No
		6	2437	12.7		
		11	2462	13.5		
		12	2467	9.6	10.5	
		13	2472	4.9	5.5	

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the tune-up limit and the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

9.5 Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr		
					Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	17.9	18.5	Yes	Not Required	11.5	No
			56	5280	17.7					
			60	5300	18.1					
			64	5320	18.3					
	802.11n (HT20)	6.5 Mbps	52	5260	18.0	18.5	No		11.5	No
			56	5280	17.7					
			60	5300	18.4					
			64	5320	18.4					
	802.11n (HT40)	13.5 Mbps	54	5270	Not Required	15.5	No	11.1	11.5	Yes
			62	5310				10.7		
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	18.3	18.5	Yes	Not Required	11.5	No
			116	5580	18.4					
			132	5660	18.2					
			140	5700	18.1					
	802.11n (HT20)	6.5 Mbps	100	5500	18.3	18.5	No		11.5	No
			116	5580	18.4					
			132	5660	18.2					
			140	5700	18.0					
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	15.5	No	11.2	11.5	Yes
			118	5590				11.4		
			142	5710				11.1		
5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	18.1	18.5	Yes	Not Required	11.5	No
			157	5785	18.2					
			165	5825	17.7					
	802.11n (HT20)	6.5 Mbps	149	5745	18.1	18.5	No		11.5	No
			157	5785	18.1					
			165	5825	17.7					
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	15.5	No	11.4	11.5	Yes
			159	5795				11.1		

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6 Bluetooth

Average Power Measured Results


Band (GHz)	Mode	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)
2.4	GFSK	0	2402	10.3
		39	2441	9.4
		78	2480	9.3
	EDR, $\pi/4$ DQPSK	0	2402	8.2
		39	2441	7.4
		78	2480	7.2
	EDR, 8-DPSK	0	2402	8.2
		39	2441	7.4
		78	2480	7.2
	LE, GFSK	0	2402	1.1
		19	2440	0.8
		39	2480	0.8

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.884	3.750	76.9%	1.30

Duty Cycle plots

GFSK

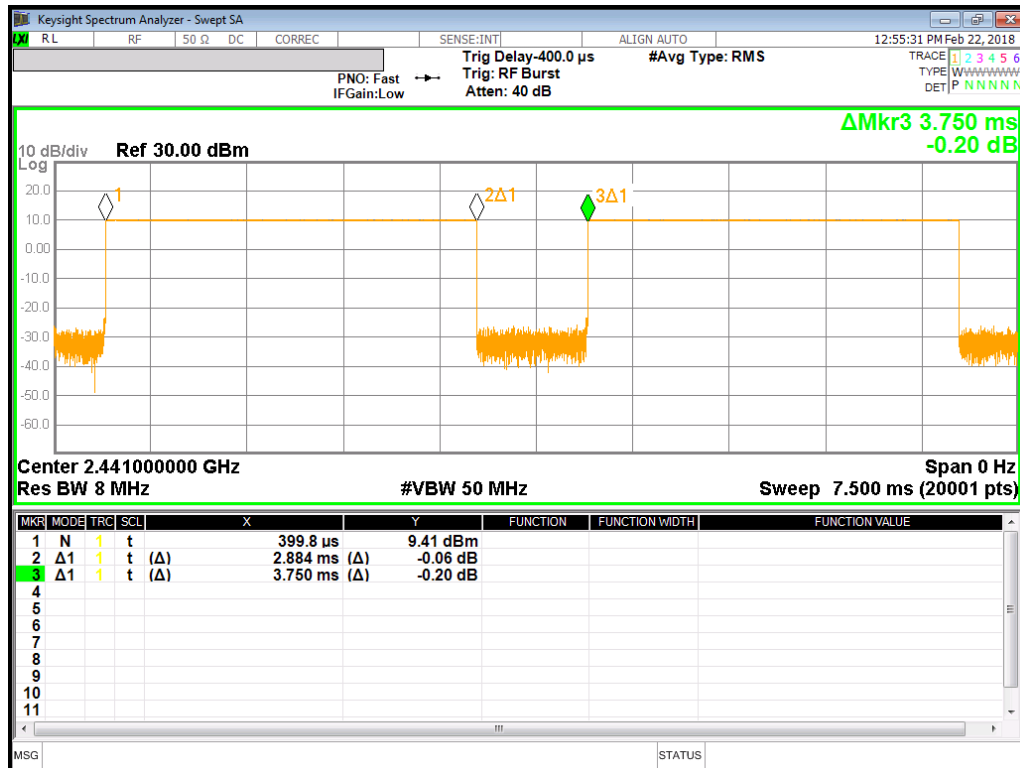

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg .

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1 GSM 850

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head (VoIP)	GPRS 4 Slot	Off	0	Left Touch	190	836.6	28.5	27.5	0.120	0.150	1
				Left Tilt	190	836.6	28.5	27.5	0.079	0.098	
				Right Touch	190	836.6	28.5	27.5	0.178	0.222	
				Right Tilt	190	836.6	28.5	27.5	0.094	0.117	
Body-worn	GPRS 4 Slot	Off	15	Rear	190	836.6	28.5	27.5	0.408	0.510	2
				Front	190	836.6	28.5	27.5	0.229	0.286	
Hotspot	GPRS 4 Slot	On	10	Rear	190	836.6	26.5	25.2	0.504	0.678	3
				Front	190	836.6	26.5	25.2	0.262	0.353	
				Edge 2	190	836.6	26.5	25.2	0.179	0.241	
				Edge 3	190	836.6	26.5	25.2	0.219	0.295	
				Edge 4	190	836.6	26.5	25.2	0.041	0.056	

10.2 GSM1900

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head (VoIP)	GPRS 4 Slot	Off	0	Left Touch	661	1880.0	25.0	24.2	0.038	0.046	4
				Left Tilt	661	1880.0	25.0	24.2	0.027	0.032	
				Right Touch	661	1880.0	25.0	24.2	0.035	0.042	
				Right Tilt	661	1880.0	25.0	24.2	0.034	0.040	
Body-worn	GPRS 4 Slot	Off	15	Rear	661	1880.0	25.0	24.2	0.515	0.618	5
				Front	661	1880.0	25.0	24.2	0.244	0.293	
Hotspot	GPRS 4 Slot	On	10	Rear	661	1880.0	22.0	21.1	0.538	0.664	6
				Front	661	1880.0	22.0	21.1	0.256	0.316	
				Edge 2	661	1880.0	22.0	21.1	0.051	0.063	
				Edge 3	661	1880.0	22.0	21.1	0.526	0.649	
				Edge 4	661	1880.0	22.0	21.1	0.071	0.087	
RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Phablet-10g	GPRS 4 Slot	Off	13	Rear	661	1880.0	25.0	24.2	0.314	0.377	7
			6	Front	661	1880.0	25.0	24.2	0.458	0.549	
			0	Edge 2	661	1880.0	25.0	24.2	0.218	0.262	
			13	Edge 3	661	1880.0	25.0	24.2	0.347	0.416	
			0	Edge 4	661	1880.0	25.0	24.2	0.232	0.278	
		On	0	Rear	661	1880.0	22.0	20.9	1.020	1.310	
			0	Front	661	1880.0	22.0	20.9	0.762	0.979	
			0	Edge 3	661	1880.0	22.0	20.9	0.694	0.892	

10.3 W-CDMA Band II

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	9400	1880.0	24.0	23.6	0.104	0.114	8
				Left Tilt	9400	1880.0	24.0	23.6	0.066	0.072	
				Right Touch	9400	1880.0	24.0	23.6	0.065	0.071	
				Right Tilt	9400	1880.0	24.0	23.6	0.071	0.078	
Bod-worn	Rel 99 RMC	Off	15	Rear	9262	1852.4	24.0	23.5	0.764	0.857	9
					9400	1880.0	24.0	23.6	0.939	1.030	
					9538	1907.6	24.0	23.3	0.709	0.833	
				Front	9400	1880.0	24.0	23.6	0.419	0.459	
Hotspot	Rel 99 RMC	On	10	Rear	9262	1852.4	20.0	19.4	0.742	0.852	10
					9400	1880.0	20.0	19.6	0.951	1.043	
					9538	1907.6	20.0	19.3	0.707	0.831	
				Front	9400	1880.0	20.0	19.6	0.417	0.457	
				Edge 2	9400	1880.0	20.0	19.6	0.090	0.098	
				Edge 3	9262	1852.4	20.0	19.4	0.700	0.804	
					9400	1880.0	20.0	19.6	0.897	0.984	
					9538	1907.6	20.0	19.3	0.668	0.785	
				Edge 4	9400	1880.0	20.0	19.6	0.103	0.113	
RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Phablet-10g	Rel 99 RMC	Off	13	Rear	9400	1880.0	24.0	23.6	0.664	0.728	11
			6	Front	9400	1880.0	24.0	23.6	0.850	0.932	
			0	Edge 2	9400	1880.0	24.0	23.6	0.334	0.366	
			13	Edge 3	9400	1880.0	24.0	23.6	0.719	0.788	
			0	Edge 4	9400	1880.0	24.0	23.6	0.362	0.397	
			0	Rear	9400	1880.0	20.0	19.6	1.280	1.391	
		On	0	Front	9400	1880.0	20.0	19.6	1.030	1.119	
			0	Edge 3	9400	1880.0	20.0	19.6	0.999	1.085	
			0	Edge 3	9400	1880.0	20.0	19.6	0.999	1.085	

10.4 W-CDMA Band V

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	4183	836.6	24.5	24.1	0.129	0.141	12
				Left Tilt	4183	836.6	24.5	24.1	0.088	0.096	
				Right Touch	4183	836.6	24.5	24.1	0.184	0.202	
				Right Tilt	4183	836.6	24.5	24.1	0.096	0.105	
Body-worn	Rel 99 RMC	Off	15	Rear	4183	836.6	24.5	24.1	0.434	0.476	13
				Front	4183	836.6	24.5	24.1	0.264	0.289	
Hotspot	Rel 99 RMC	On	10	Rear	4183	836.6	22.5	22.1	0.674	0.741	14
				Front	4183	836.6	22.5	22.1	0.315	0.346	
				Edge 2	4183	836.6	22.5	22.1	0.240	0.264	
				Edge 3	4183	836.6	22.5	22.1	0.229	0.252	
				Edge 4	4183	836.6	22.5	22.1	0.049	0.054	

10.5 LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	Off	0	Left Touch	20525	836.5	1	49	25.0	24.7	0.154	0.164	15
							25	25	24.0	23.4	0.107	0.122	
				Left Tilt	20525	836.5	1	49	25.0	24.7	0.104	0.111	
							25	25	24.0	23.4	0.070	0.079	
				Right Touch	20525	836.5	1	49	25.0	24.7	0.229	0.244	
							25	25	24.0	23.4	0.162	0.185	
				Right Tilt	20525	836.5	1	49	25.0	24.7	0.111	0.118	
							25	25	24.0	23.4	0.077	0.087	
Body-worn	QPSK	Off	15	Rear	20525	836.5	1	49	25.0	24.7	0.504	0.536	16
							25	25	24.0	23.4	0.365	0.416	
				Front	20525	836.5	1	49	25.0	24.7	0.308	0.328	
							25	25	24.0	23.4	0.215	0.245	
Hotspot	QPSK	On	10	Rear	20525	836.5	1	49	23.0	22.7	0.707	0.751	17
							25	12	23.0	22.4	0.632	0.727	
				Front	20525	836.5	1	49	23.0	22.7	0.355	0.377	
							25	12	23.0	22.4	0.314	0.361	
				Edge 2	20525	836.5	1	49	23.0	22.7	0.251	0.266	
							25	12	23.0	22.4	0.245	0.282	
				Edge 3	20525	836.5	1	49	23.0	22.7	0.249	0.264	
							25	12	23.0	22.4	0.218	0.251	
				Edge 4	20525	836.5	1	49	23.0	22.7	0.048	0.051	
							25	12	23.0	22.4	0.046	0.053	

10.6 Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head	On	0	Left Touch	11	2462.0	0.153	99.7	13.5	13.4			
					Left Tilt	11	2462.0	0.190	99.7	13.5	13.4			
					Right Touch	11	2462.0	0.330	99.7	13.5	13.4			
					Right Tilt	11	2462.0	0.444	99.7	13.5	13.4	0.310	0.317	18
		Body-worn	Off	15	Rear	6	2437.0	0.124	99.7	19.5	18.7	0.095	0.114	19
					Front	6	2437.0	0.064	99.7	19.5	18.7			
		Hotspot	Off	10	Rear	6	2437.0	0.251	99.7	19.5	18.7	0.195	0.234	20
					Front	6	2437.0	0.134	99.7	19.5	18.7			
					Edge 1	6	2437.0	0.203	99.7	19.5	18.7			
					Edge 4	6	2437.0	0.081	99.7	19.5	18.7			

Note(s):

- When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.
- SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.7 Wi-Fi (U-NII Bands)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	54	5270.0	0.557	96.0	11.5	11.1					21
					Left Tilt	54	5270.0	0.575	96.0	11.5	11.1					
					Right Touch	54	5270.0	0.989	96.0	11.5	11.1	0.413	0.467			
					Right Tilt	54	5270.0	0.846	96.0	11.5	11.1	0.411	0.465			
	802.11a 6 Mbps	Body-worn	Off	15	Rear	64	5320.0	0.223	98.2	18.5	18.3					22
					Front	64	5320.0	0.487	98.2	18.5	18.3	0.220	0.234			
	802.11a 6 Mbps	Phablet-10g	Off	0	Rear	64	5320.0	7.237	98.2	18.5	18.3			0.728	0.774	23
					Front	64	5320.0	6.181	98.2	18.5	18.3					
					Edge 1	64	5320.0	6.514	98.2	18.5	18.3					
					Edge 4	64	5320.0	1.021	98.2	18.5	18.3					
Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.5 GHz U-NII 2C	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	110	5550.0	1.318	96.0	11.5	11.4	0.653	0.696			24
					Left Tilt	110	5550.0	1.301	96.0	11.5	11.4					
					Right Touch	102	5510.0	1.738	96.0	11.5	11.2	0.923	1.034			
						110	5550.0	1.922	96.0	11.5	11.4	1.030	1.097			
					Right Tilt	102	5510.0	1.711	96.0	11.5	11.2	0.898	1.006			
						110	5550.0	1.868	96.0	11.5	11.4	0.962	1.025			
	802.11a 6 Mbps	Body-worn	Off	15	Rear	116	5580.0	0.259	98.2	18.5	18.4	0.115	0.121			25
					Front	116	5580.0	1.196	98.2	18.5	18.4	0.524	0.551			
	802.11a 6 Mbps	Phablet-10g	Off	0	Rear	116	5580.0	5.555	98.2	18.5	18.4					26
					Front	100	5500.0	19.352	98.2	18.5	18.4			1.910	2.008	
						116	5580.0	23.755	98.2	18.5	18.4			2.230	2.345	
					Edge 1	116	5580.0	9.320	98.2	18.5	18.4			1.410	1.482	
					Edge 4	116	5580.0	1.967	98.2	18.5	18.4					
						116	5580.0	1.967	98.2	18.5	18.4					
Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	151	5755.0	1.164	96.0	11.5	11.4					27
					Left Tilt	151	5755.0	1.266	96.0	11.5	11.4	0.533	0.567			
					Right Touch	151	5755.0	1.718	96.0	11.5	11.4	0.855	0.909			
						159	5795.0	1.627	96.0	11.5	11.1	0.793	0.912			
					Right Tilt	151	5755.0	1.742	96.0	11.5	11.4	0.862	0.916			
						159	5795.0	1.732	96.0	11.5	11.1	0.796	0.915			
	802.11a 6 Mbps	Body-worn	Off	15	Rear	157	5785.0	0.267	98.2	18.5	18.2	0.127	0.139			28
					Front	157	5785.0	1.159	98.2	18.5	18.2	0.525	0.574			
	802.11a 6 Mbps	Hotspot	Off	10	Rear	157	5785.0	0.389	98.2	18.5	18.2	0.196	0.214			29
					Front	149	5745.0	1.729	98.2	18.5	18.1	0.767	0.852			
						157	5785.0	1.759	98.2	18.5	18.2	0.769	0.841			
					Edge 1	157	5785.0	0.953	98.2	18.5	18.2	0.434	0.475			
					Edge 4	157	5785.0	0.141	98.2	18.5	18.2					
						157	5785.0	0.141	98.2	18.5	18.2					

10.8 Bluetooth

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	GFSK	Head	0	Left Touch	0	2402.0	76.9	10.5	10.3	0.057	0.077	
				Left Tilt	0	2402.0	76.9	10.5	10.3	0.063	0.087	
				Right Touch	0	2402.0	76.9	10.5	10.3	0.095	0.129	
				Righttt Tilt	0	2402.0	76.9	10.5	10.3	0.119	0.162	30

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-w orn	2.480	10.5	11	15	1.2	0.154
	Hotspot	2.480	10.5	11	10	1.7	0.231

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
835	GSM 850	Hotspot	Rear	No	0.504	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.674	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.707	N/A	N/A
1900	GSM 1900	Hotspot	Rear	No	0.538	N/A	N/A
	WCDMA Band II	Hotspot	Rear	Yes	0.951	0.937	1.01
2400	Wi-Fi 802.11b/g/n	Head	Right Tilt	No	0.310	N/A	N/A
	Bluetooth	Head	Right Tilt	No	0.119	N/A	N/A
5300	Wi-Fi 802.11a/n	Head	Right Touch	No	0.413	N/A	N/A
5500	Wi-Fi 802.11a/n	Head	Right Touch	Yes	1.030	1.02	1.01
5800	Wi-Fi 802.11a/n	Head	Right Tilt	Yes	0.862	0.860	1.00

Peak spatial-average (10g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
1900	GSM 1900	Phablet-10g	Rear	No	1.020	N/A	N/A
	WCDMA Band II	Phablet-10g	Rear	No	1.280	N/A	N/A
5300	Wi-Fi 802.11a/n	Phablet-10g	Rear	No	0.728	N/A	N/A
5500	Wi-Fi 802.11a/n	Phablet-10g	Front	Yes	2.230	2.21	1.01

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations	
Head	1	GSM(Voice/GPRS)	+ DTS
	2	GSM(Voice/GPRS)	+ BT
	3	GSM(Voice/GPRS)	+ U-NII
	4	W-CDMA	+ DTS
	5	W-CDMA	+ BT
	6	W-CDMA	+ U-NII
	7	LTE	+ DTS
	8	LTE	+ BT
	9	LTE	+ U-NII
Body-w orn	10	GSM(Voice/GPRS)	+ DTS
	11	GSM(Voice/GPRS)	+ BT
	12	GSM(Voice/GPRS)	+ U-NII
	13	W-CDMA	+ DTS
	14	W-CDMA	+ BT
	15	W-CDMA	+ U-NII
	16	LTE	+ DTS
	17	LTE	+ BT
	18	LTE	+ U-NII
Hotspot	19	GSM(GPRS)	+ DTS
	20	GSM(GPRS)	+ BT
	21	GSM(GPRS)	+ U-NII
	22	WCDMA	+ DTS
	23	WCDMA	+ BT
	24	WCDMA	+ U-NII
	25	LTE	+ DTS
	26	LTE	+ BT
	27	LTE	+ U-NII
Phablet-10g	28	GSM(Voice/GPRS)	+ U-NII
	29	WCDMA	+ U-NII

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. U-NII supports Wi-Fi Direct, Hotspot and VoIP.
3. GPRS, W-CDMA, LTE supports Hotspot and VoIP.
4. DTS or U-NII Radio cannot transmit simultaneously with Bluetooth Radio.
5. DTS Radio cannot transmit simultaneously with U-NII Radio.
6. BT tethering is consider about each RF exposure conditions

12.1 Sum of the SAR for GSM 850 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.222	0.317	1.097	0.162	0.539	No	1.319	No	0.384	No
Body-worn	Rear	0.510	0.114	0.139	0.154	0.624	No	0.649	No	0.664	No
	Front	0.286	0.114	0.574	0.154	0.400	No	0.860	No	0.440	No
Hotspot	Rear	0.678	0.234	0.214	0.231	0.912	No	0.892	No	0.909	No
	Front	0.353	0.234	0.852	0.231	0.587	No	1.205	No	0.584	No
	Edge 1		0.234	0.475	0.231	0.228	No	0.475	No	0.231	No
	Edge 2	0.241				0.241	No	0.241	No	0.241	No
	Edge 3	0.295				0.295	No	0.295	No	0.295	No
	Edge 4	0.056	0.234	0.852	0.231	0.290	No	0.908	No	0.287	No

12.2 Sum of the SAR for GSM 1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.046	0.317	1.097	0.162	0.363	No	1.143	No	0.208	No
Body-worn	Rear	0.618	0.114	0.139	0.154	0.732	No	0.757	No	0.772	No
	Front	0.293	0.114	0.574	0.154	0.407	No	0.867	No	0.447	No
Hotspot	Rear	0.664	0.234	0.214	0.231	0.898	No	0.878	No	0.895	No
	Front	0.316	0.234	0.852	0.231	0.550	No	1.168	No	0.547	No
	Edge 1		0.234	0.475	0.231	0.228	No	0.475	No	0.231	No
	Edge 2	0.063				0.063	No	0.063	No	0.063	No
	Edge 3	0.649				0.649	No	0.649	No	0.649	No
	Edge 4	0.087	0.234	0.852	0.231	0.321	No	0.939	No	0.318	No
RF Exposure conditions	Test Position	① WWAN	② U-NII	① + ② WWAN + U-NII							
				Σ 10-g SAR (mW/g)	SPLSR (Yes/ No)						
Phablet-10g	All position	1.310	2.345	3.655	No						

12.3 Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.114	0.317	1.097	0.162	0.431	No	1.211	No	0.276	No
Body-worn	Rear	1.030	0.114	0.139	0.154	1.144	No	1.169	No	1.184	No
	Front	0.459	0.114	0.574	0.154	0.573	No	1.033	No	0.613	No
Hotspot	Rear	1.043	0.234	0.214	0.231	1.277	No	1.257	No	1.274	No
	Front	0.457	0.234	0.852	0.231	0.691	No	1.309	No	0.688	No
	Edge 1		0.234	0.475	0.231	0.228	No	0.475	No	0.231	No
	Edge 2	0.098				0.098	No	0.098	No	0.098	No
	Edge 3	0.984				0.984	No	0.984	No	0.984	No
	Edge 4	0.113	0.234	0.852	0.231	0.347	No	0.965	No	0.344	No
RF Exposure conditions	Test Position	① WWAN	② U-NII	① + ② WWAN + U-NII							
				Σ 10-g SAR (mW/g)	SPLSR (Yes/ No)						
Phablet-10g	All position	1.391	2.345	3.736	No						

12.4 Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.202	0.317	1.097	0.162	0.519	No	1.299	No	0.364	No
Body-worn	Rear	0.476	0.114	0.139	0.154	0.590	No	0.615	No	0.630	No
	Front	0.289	0.114	0.574	0.154	0.403	No	0.863	No	0.443	No
Hotspot	Rear	0.741	0.234	0.214	0.231	0.975	No	0.955	No	0.972	No
	Front	0.346	0.234	0.852	0.231	0.580	No	1.198	No	0.577	No
	Edge 1		0.234	0.475	0.231	0.228	No	0.475	No	0.231	No
	Edge 2	0.264				0.264	No	0.264	No	0.264	No
	Edge 3	0.252				0.252	No	0.252	No	0.252	No
	Edge 4	0.054	0.234	0.852	0.231	0.288	No	0.906	No	0.285	No

12.5 Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All position	0.244	0.317	1.097	0.162	0.561	No	1.341	No	0.406	No
Body -worn	Rear	0.536	0.114	0.139	0.154	0.650	No	0.675	No	0.690	No
	Front	0.328	0.114	0.574	0.154	0.442	No	0.902	No	0.482	No
Hotspot	Rear	0.751	0.234	0.214	0.231	0.985	No	0.965	No	0.982	No
	Front	0.377	0.234	0.852	0.231	0.611	No	1.229	No	0.608	No
	Edge 1		0.234	0.475	0.231	0.228	No	0.475	No	0.231	No
	Edge 2	0.282				0.282	No	0.282	No	0.282	No
	Edge 3	0.264				0.264	No	0.264	No	0.264	No
	Edge 4	0.053	0.234	0.852	0.231	0.287	No	0.905	No	0.284	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg (10-g SAR is < 4.0 W/kg) or the SPLSR is < 1-g 0.04 (10-g 0.10) for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

4788372835-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

4788372835-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

4788372835-S1V1 FCC Report SAR_App C_System Check Plots

4788372835-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

4788372835-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

4788372835-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT