



FCC 47 CFR PART 15 SUBPART E

UNII

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER : SM-A605K

FCC ID: A3LSMA605K

REPORT NUMBER: 4788480738-E4V2

ISSUE DATE: MAY 30, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED*

Testing
Laboratory

TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	05/25/18	Initial issue	Junwhan Lee
V2	05/30/18	Updated to address TCB's question	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. SUMMARY TABLE	14
8. MEASUREMENT METHODS	15
9. REFERENCE MEASUREMENTS RESULTS	16
9.1. ON TIME AND DUTY CYCLE RESULTS.....	16
9.2. DUTY CYCLE PLOTS	16
9.3. 26 dB BANDWIDTH.....	18
9.3.1. 802.11a MODE IN THE 5.2 GHz BAND	18
9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	18
9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	18
9.3.4. 802.11a MODE IN THE 5.3 GHz BAND	19
9.3.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND	19
9.3.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND	19
9.3.7. 802.11a MODE IN THE 5.5 GHz BAND	19
9.3.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND	19
9.3.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND	20
9.3.10. 802.11a MODE IN THE 5.8 GHz BAND	20
9.3.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND	20
9.3.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND	20
9.3.13. 26 dB BANDWIDTH PLOTS	21

10. ANTENNA PORT TEST RESULTS	33
10.1. 6 dB BANDWIDTH	33
10.1.1. 802.11a MODE IN THE 5.8 GHz BAND	33
10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND	33
10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND	33
10.1.4. 6 dB BANDWIDTH PLOTS	34
10.2. OUTPUT POWER AND PPSD	37
10.2.1. 802.11a MODE IN THE 5.2 GHz BAND	38
10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	39
10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	40
10.2.4. 802.11a MODE IN THE 5.3 GHz BAND	41
10.2.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND	42
10.2.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND	43
10.2.7. 802.11a MODE IN THE 5.5 GHz BAND	44
10.2.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND	45
10.2.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND	46
10.2.10. 802.11a MODE IN THE 5.8 GHz BAND	47
10.2.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND	48
10.2.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND	49
10.2.13. PPSD PLOTS	50
11. TRANSMITTER ABOVE 1 GHz.....	62
11.1. 5.2 GHz.....	64
11.1.1. TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND	64
11.1.2. TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND.....	72
11.1.3. TX Above 1GHz 802.11n HT40 MODE IN THE 5.2GHz BAND.....	80
11.2. 5.3 GHz.....	86
11.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	86
11.2.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.3GHz BAND.....	94
11.2.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.3GHz BAND.....	102
11.3. 5.5-5.6 GHz.....	108
11.3.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND	108
11.3.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND.....	118
11.3.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND.....	128
11.4. 5.8 GHz.....	138
11.4.1. TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND	138
11.4.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND.....	148
11.4.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.8GHz BAND.....	158
12. WORST-CASE BELOW 1 GHz	166
13. AC POWER LINE CONDUCTED EMISSIONS	168
14. DYNAMIC FREQUENCY SELECTION.....	173
14.1. OVERVIEW.....	173
14.1.1. LIMITS.....	173
14.1.1. TEST AND MEASUREMENT SYSTEM	177
14.1.2. SETUP OF EUT.....	180

14.1.3. DESCRIPTION OF EUT	181
14.2. RESULTS FOR 20 MHz BANDWIDTH.....	182
14.2.1. TEST CHANNEL	182
14.2.2. RADAR WAVEFORM AND TRAFFIC.....	182
14.2.3. OVERLAPPING CHANNEL TESTS.....	184
14.2.4. MOVE AND CLOSING TIME	184
14.3. RESULTS FOR 40 MHz BANDWIDTH.....	187
14.3.1. TEST CHANNEL	187
14.3.2. RADAR WAVEFORM AND TRAFFIC.....	187
14.3.3. OVERLAPPING CHANNEL TESTS.....	189
14.3.4. MOVE AND CLOSING TIME	189
15. SETUP PHOTOS.....	192

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER: SM-A605K

SERIAL NUMBER: R39K30GTZ6H (RADIATED);
R39K30GTV6B, R39K30GTWVB (CONDUCTED)

DATE TESTED: MAY 09, 2018 - MAR 24, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☐	Chamber 1
☒	Chamber 2
☐	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC.
This test report addresses the NII (UNII) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5180 - 5240	802.11a	15.83	38.28
	802.11n HT20	15.88	38.73
5190 - 5230	802.11n HT40	15.60	36.31
5260 - 5320	802.11a	15.52	35.65
	802.11n HT20	15.48	35.32
5270 - 5310	802.11n HT40	15.90	38.90
5500 - 5700	802.11a	15.86	38.55
	802.11n HT20	15.84	38.37
5510 - 5690	802.11n HT40	15.81	38.11
5745 - 5825	802.11a	15.69	37.07
	802.11n HT20	15.86	38.55
5755 - 5795	802.11n HT40	15.53	35.73

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of:

Frequency Range [MHz]	Antenna Gain [dBi]
UNII 1 5150 – 5250	-1.41
UNII 2A 5250 – 5350	-2.72
UNII 2C 5470 – 5725	-3.66
UNII 3 5725 – 5850	-5.64

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0

Note : All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50KWK	DK4K207VS/A- E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

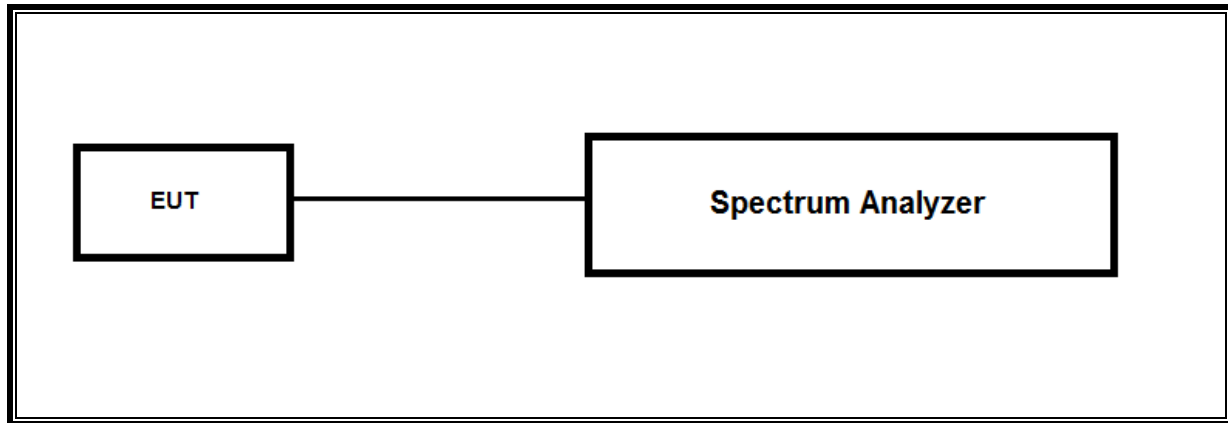

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

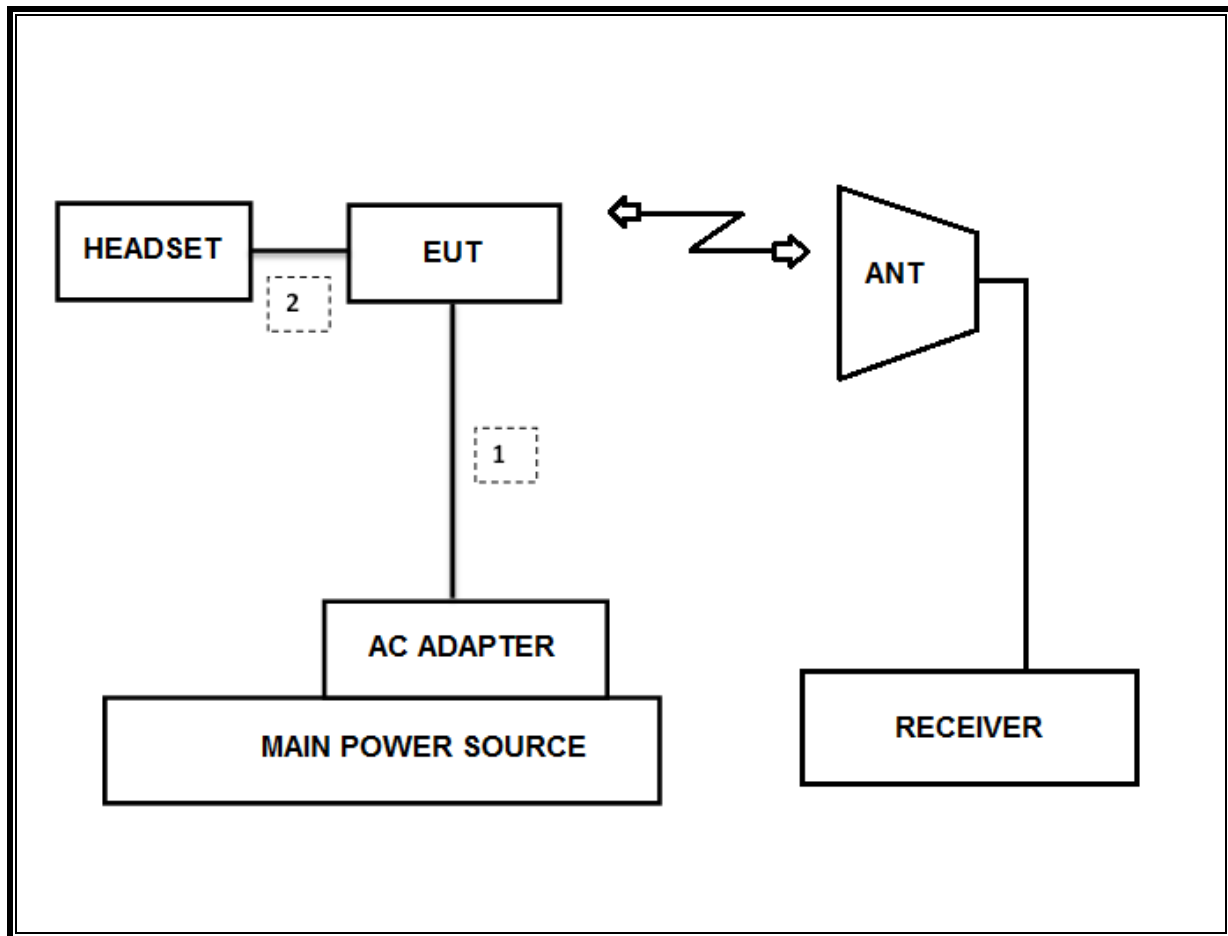

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
Attenuator	PASTERNAK	PE7087-10	A009	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8Ghz)	500KHz	Condcuted	PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	PASS

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section B.

6dB Emission BW : KDB 789033 D02 v02r01, Section C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section D.

Conducted Output Power : KDB 789033 D02 v02r01, Section E.3.a(Method PM)

Power Spectral Density : KDB 789033 D02 v02r01, Section F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section G.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section G.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11a	5.484	5.583	0.982	98.2%	0.00	0.010
802.11n HT20	5.068	5.166	0.981	98.1%	0.00	0.010
802.11n HT40	2.455	2.556	0.960	96.0%	0.18	0.407

9.2. DUTY CYCLE PLOTS

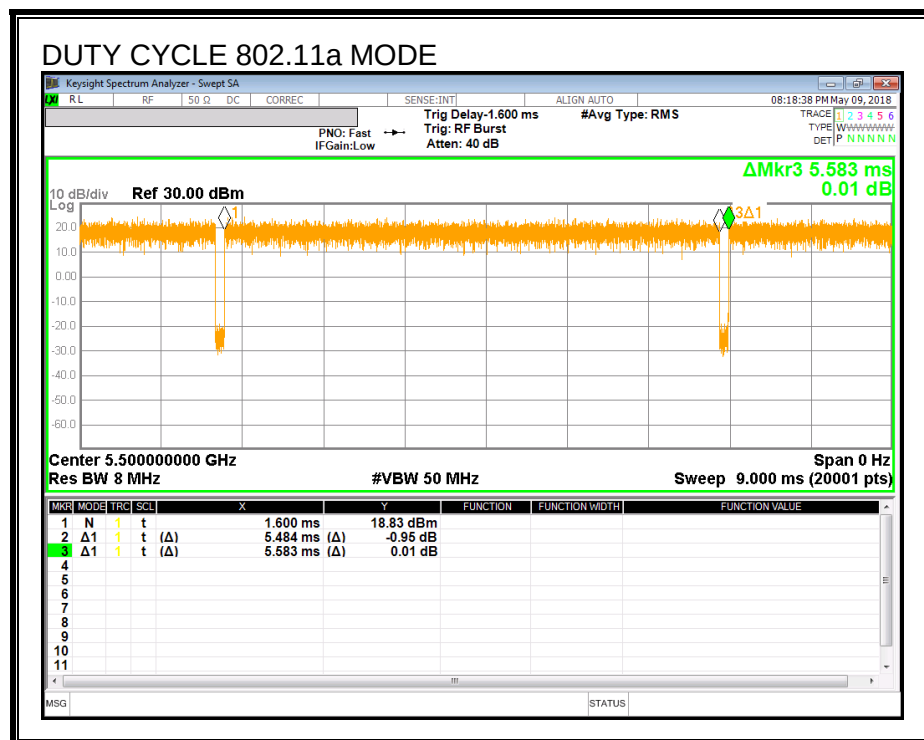

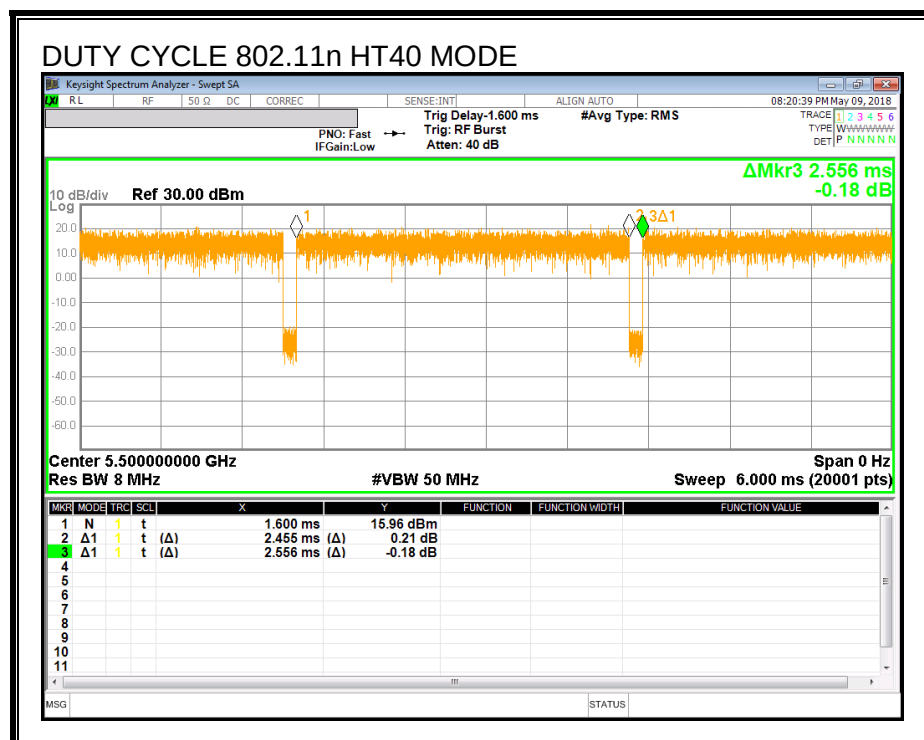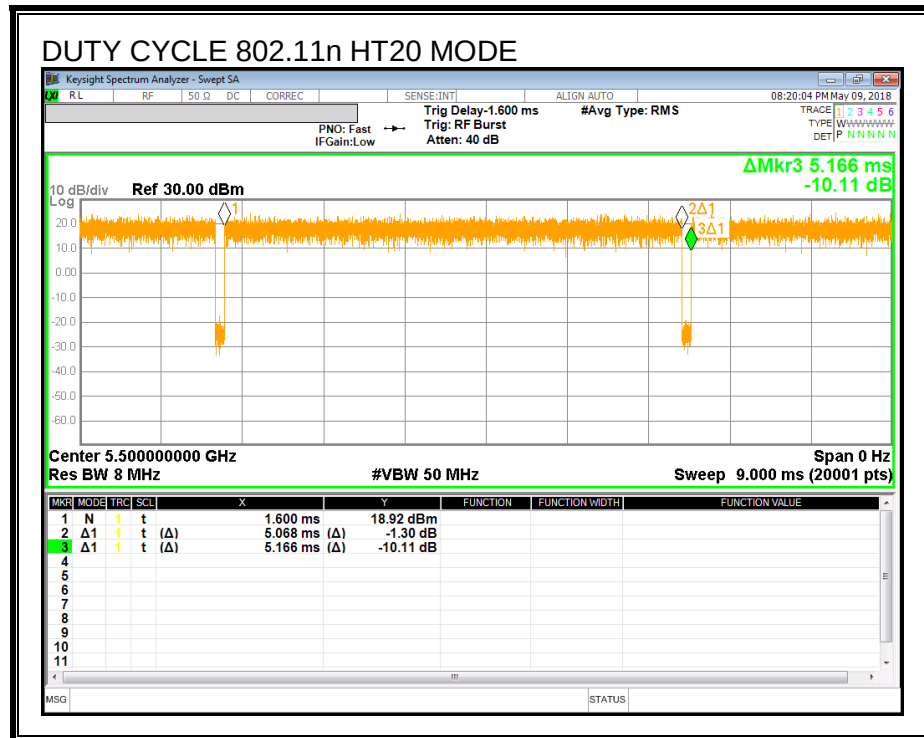

9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

RESULTS

9.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	19.99
Mid	5200	20.47
High	5240	20.69
Worst		20.69

9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	21.02
Mid	5200	20.86
High	5240	20.65
Worst		21.02

9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5190	42.76
High	5230	43.21
Worst		43.21

9.3.4. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	20.83
Mid	5300	20.31
High	5320	19.99
Worst		20.83

9.3.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	20.75
Mid	5300	20.52
High	5320	20.91
Worst		20.91

9.3.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5270	42.51
High	5310	44.16
Worst		44.16

9.3.7. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	19.86
Mid	5580	20.25
High	5700	21.16
Worst		21.16

9.3.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	20.88
Mid	5580	20.44
High	5700	20.73
Worst		20.88

9.3.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5510	42.88
Mid	5550	42.30
High	5670	43.04
Worst		43.04

9.3.10. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5745	20.52
Mid	5785	20.21
High	5825	20.41
Worst		20.52

9.3.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5745	20.75
Mid	5785	20.78
High	5825	20.89
Worst		20.89


9.3.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5755	43.27
High	5795	42.94
Worst		43.27


9.3.13. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

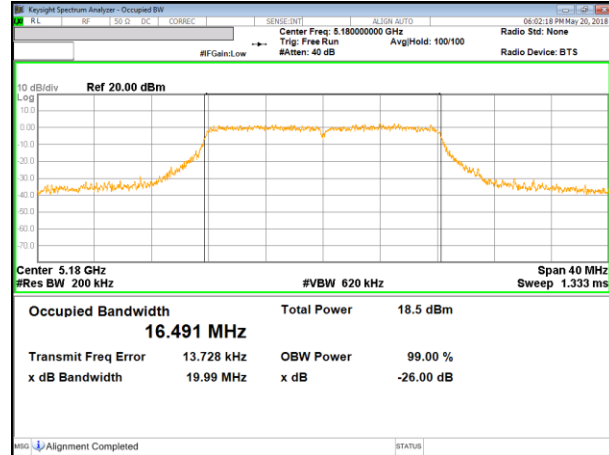

11a Mode Middle Channel

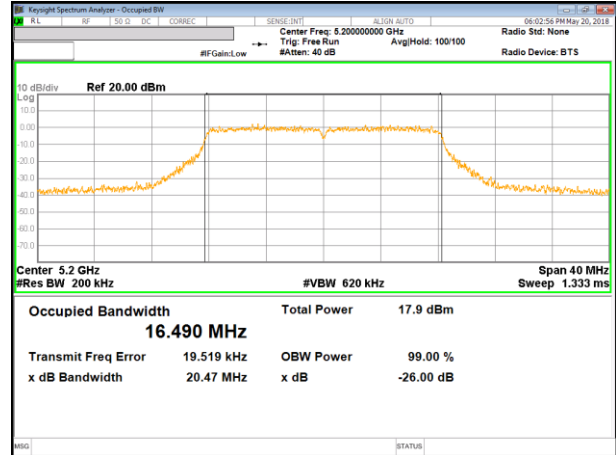


11a Mode High Channel

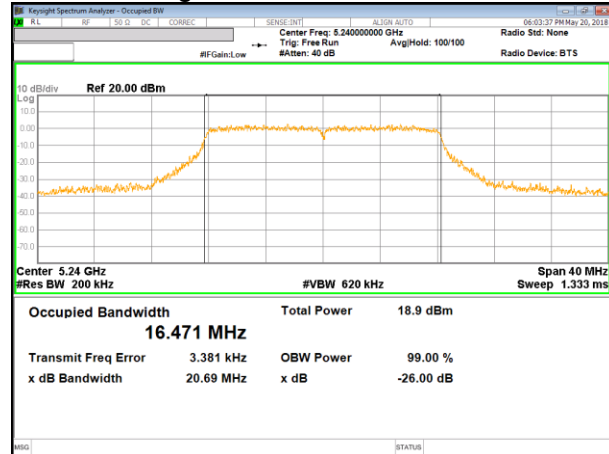


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

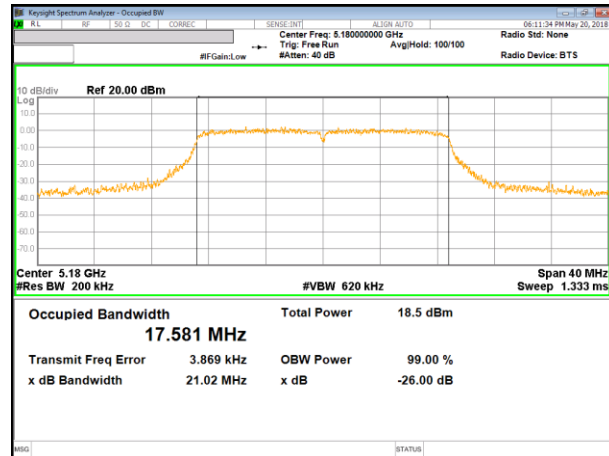


11n HT20 Mode Middle Channel

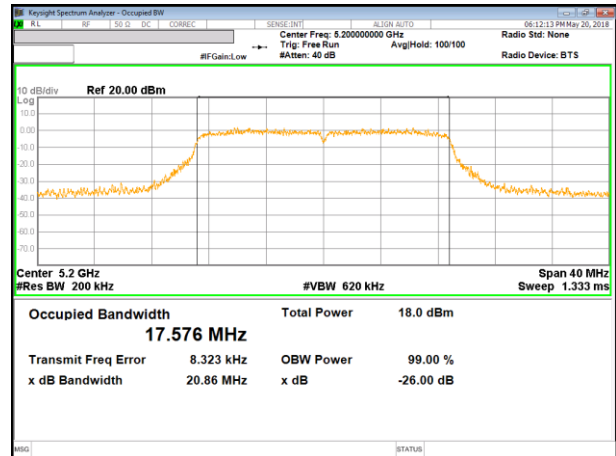

11n HT20 Mode High Channel

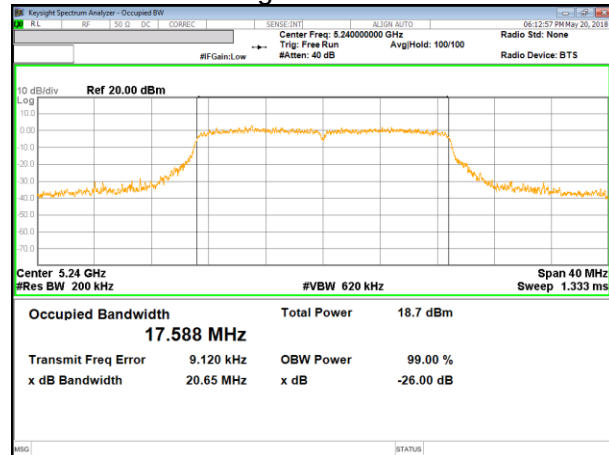


UNII 5.2 GHz IEEE 802.11n HT40 mode

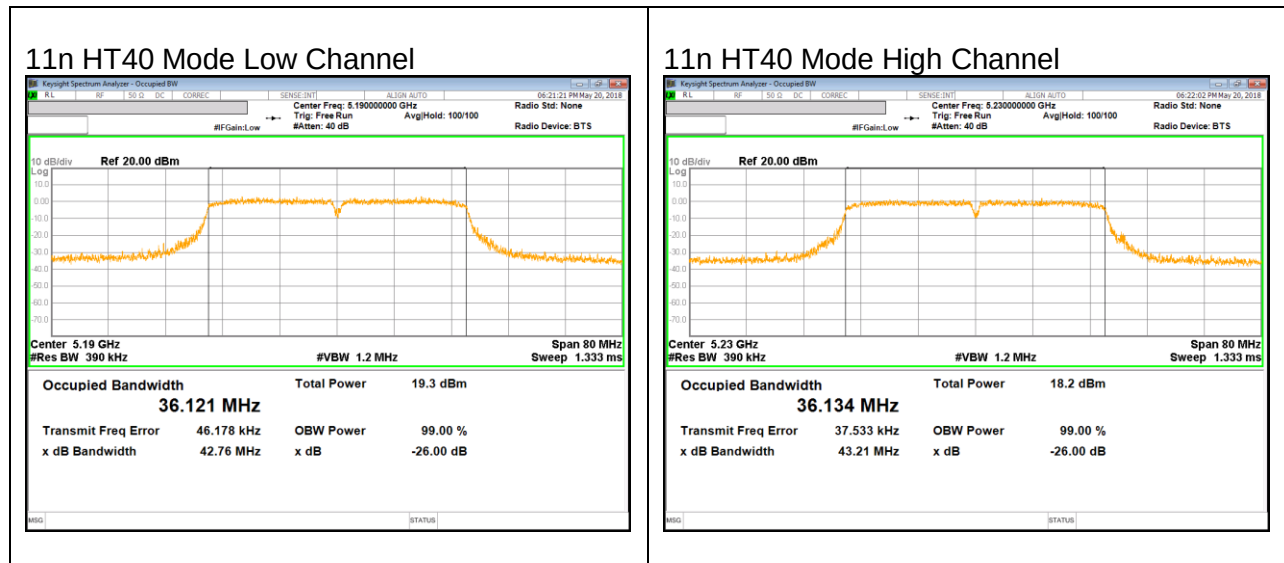


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

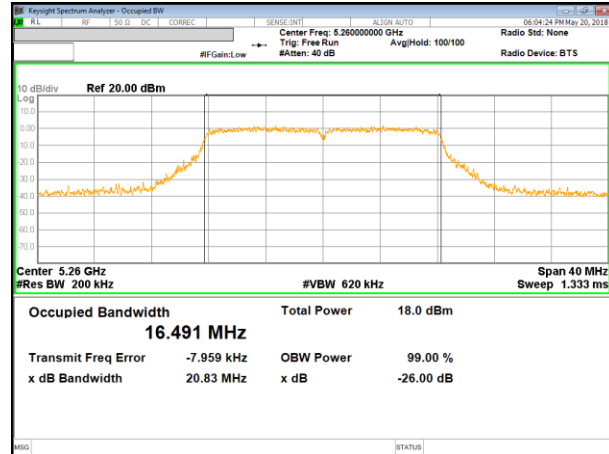

11a Mode Middle Channel

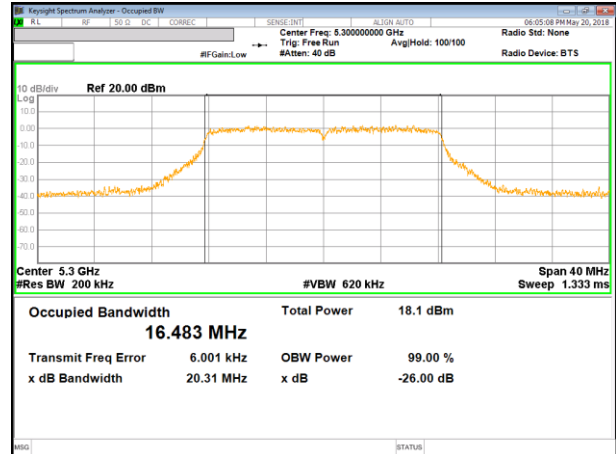


11a Mode High Channel

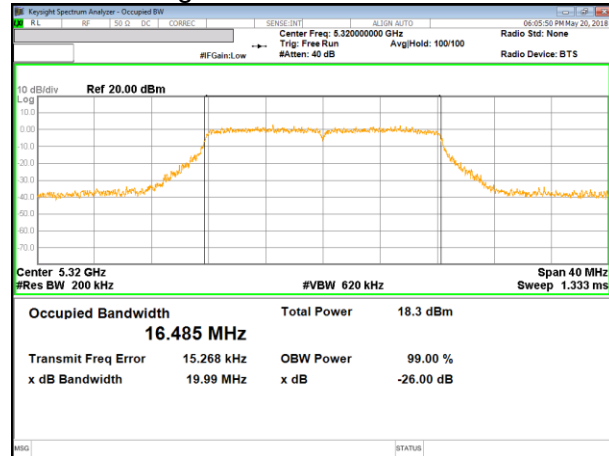


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

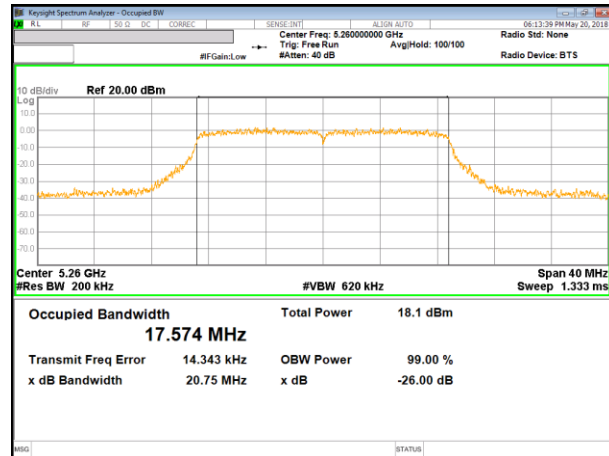


11n HT20 Mode Middle Channel

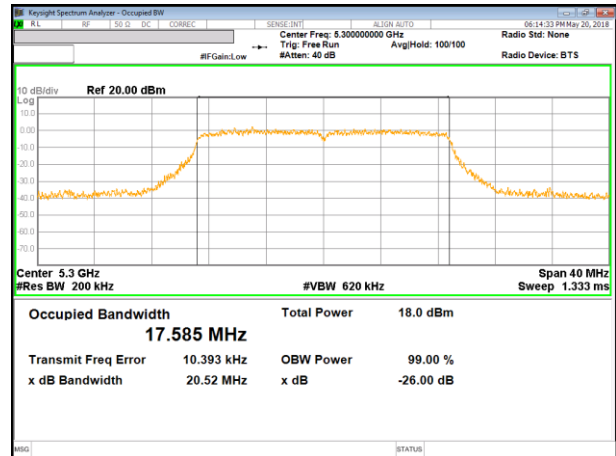

11n HT20 Mode High Channel

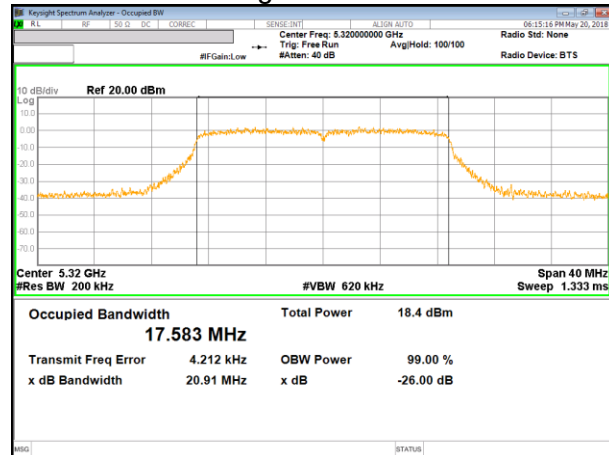


UNII 5.3 GHz IEEE 802.11n HT40 mode

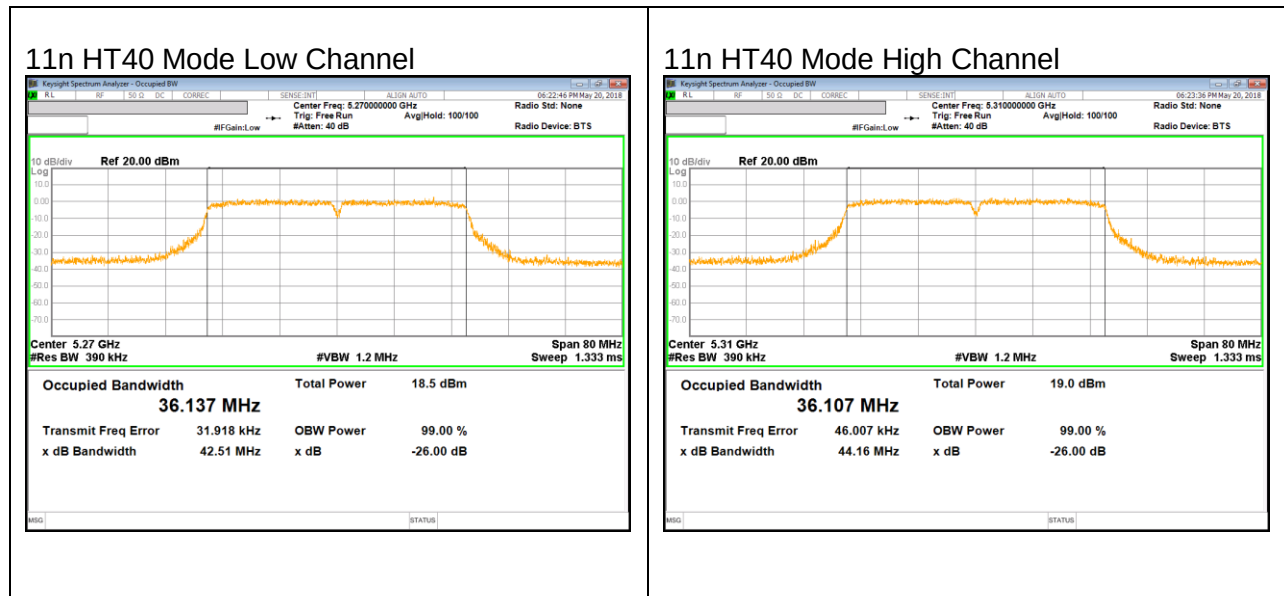


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

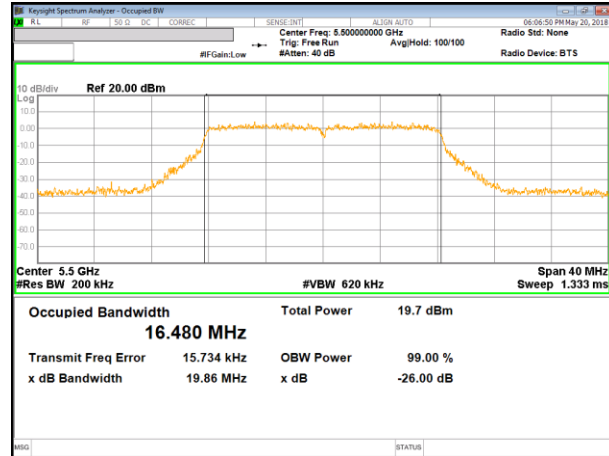

11a Mode Middle Channel

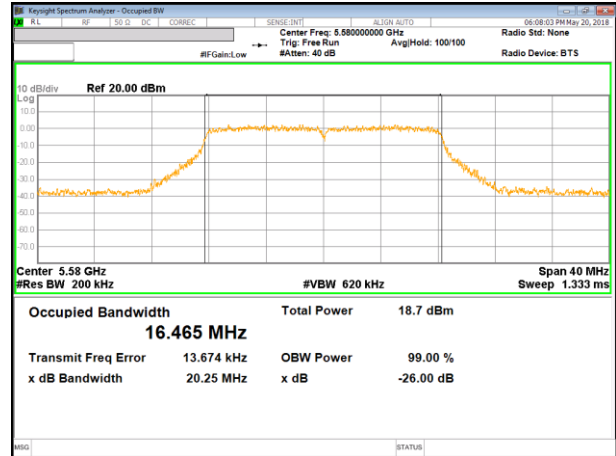


11a Mode High Channel

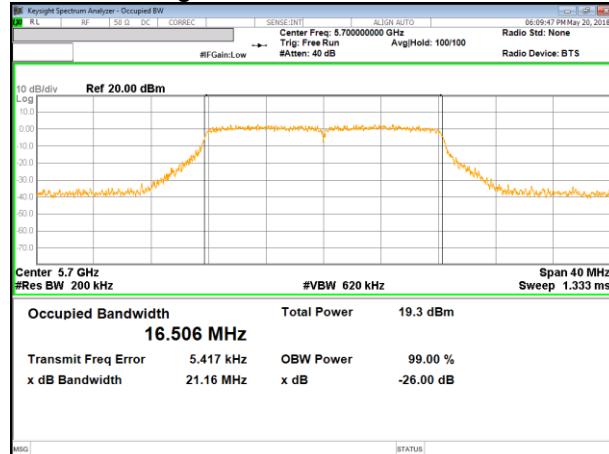


UNII 5.5 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

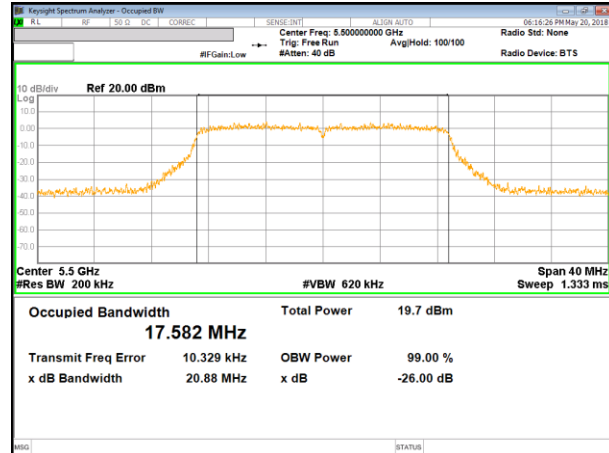

11n HT20 Mode Middle Channel

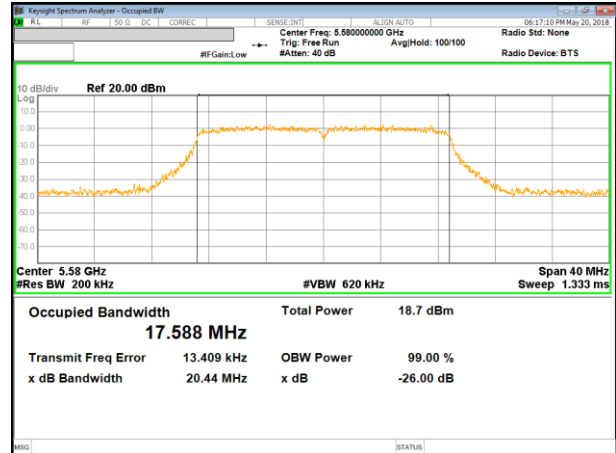


11n HT20 Mode High Channel

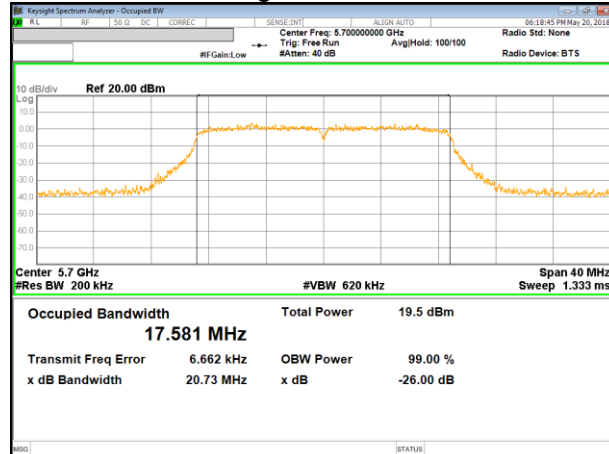


UNII 5.5 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Low Channel

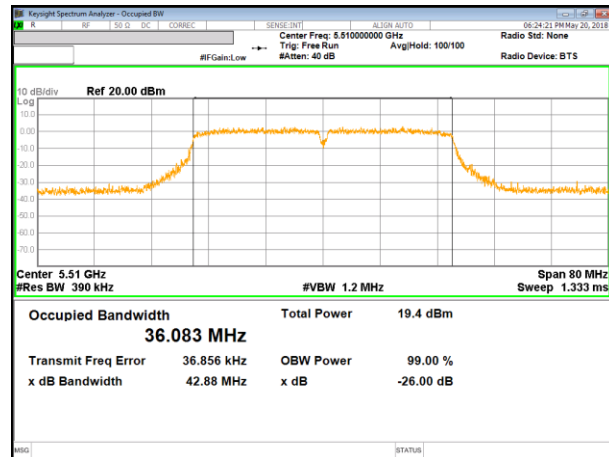

11n HT40 Mode Middle Channel

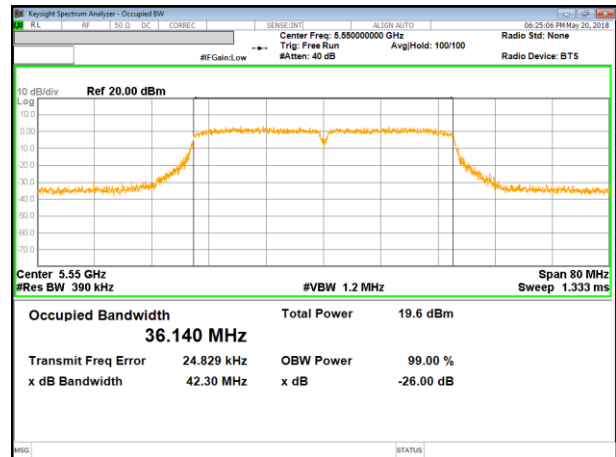


11n HT40 Mode High Channel

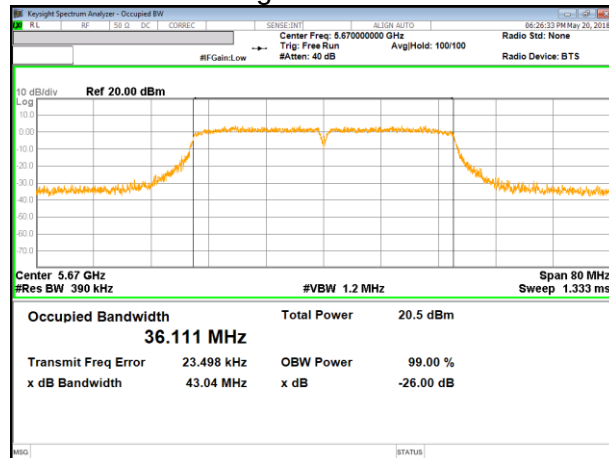


UNII 5.8 GHz IEEE 802.11a mode


11a Mode Low Channel

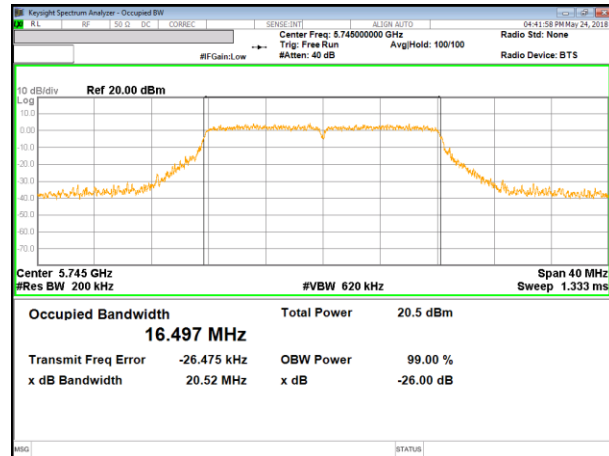

11a Mode Middle Channel

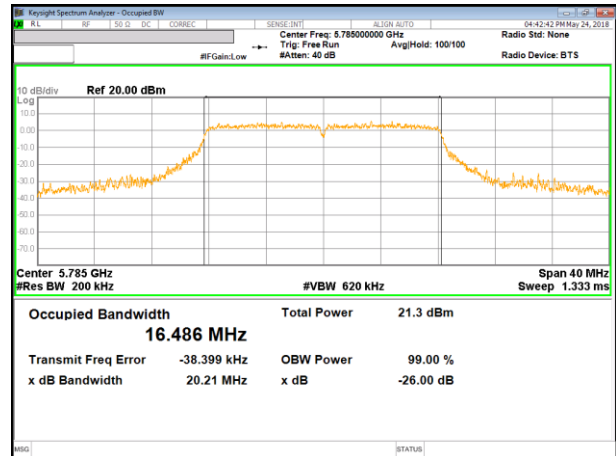


11a Mode High Channel

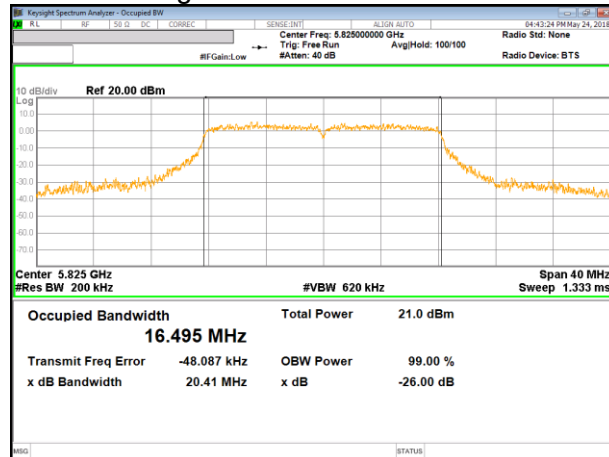


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

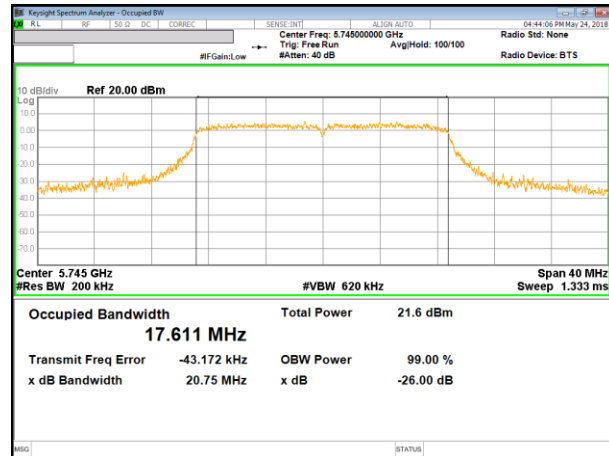

11n HT20 Mode Middle Channel

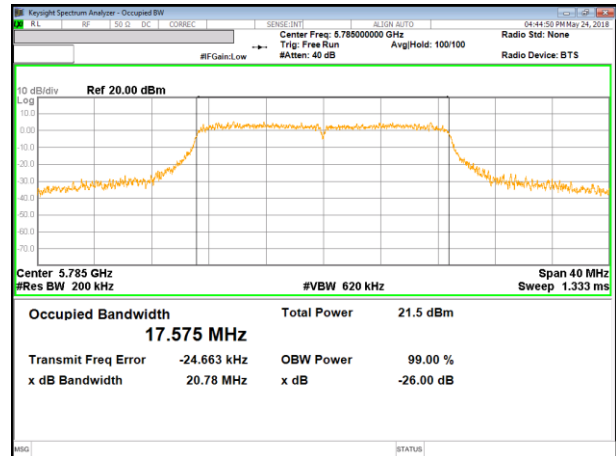


11n HT20 Mode High Channel

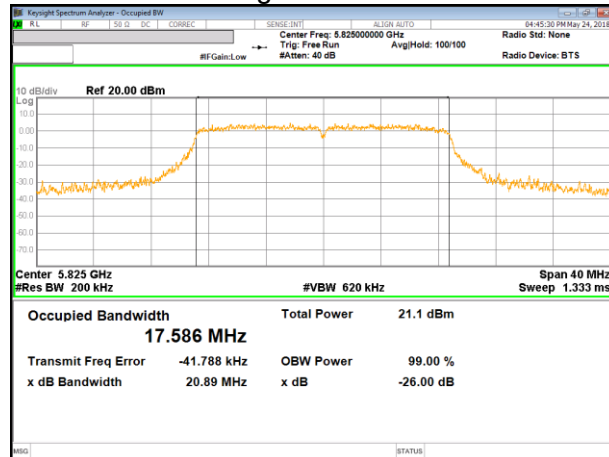


UNII 5.8 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

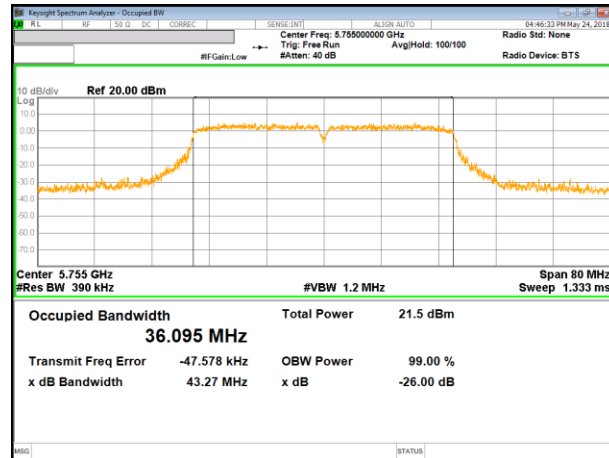

11n HT40 Mode High Channel

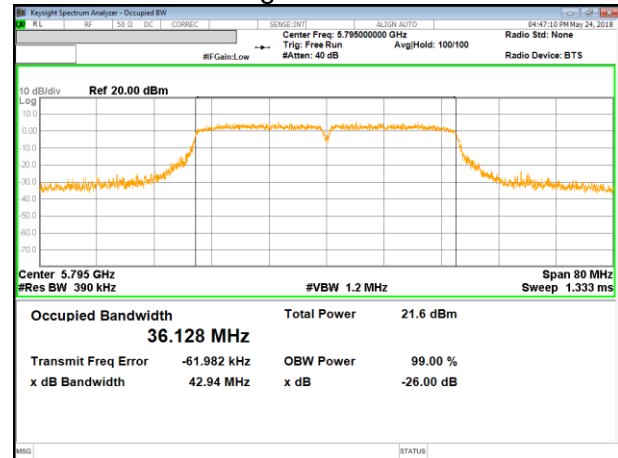

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

10.1.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	5745	16.320	0.5
Mid	5785	16.330	0.5
High	5825	16.320	0.5
Worst		16.320	

10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	5745	17.550	0.5
Mid	5785	17.590	0.5
High	5825	17.270	0.5
Worst		17.270	


10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	5755	35.040	0.5
High	5795	35.260	0.5
Worst		35.040	


10.1.4. 6 dB BANDWIDTH PLOTS

UNII 5.8 GHz IEEE 802.11a mode


11a Mode Low Channel

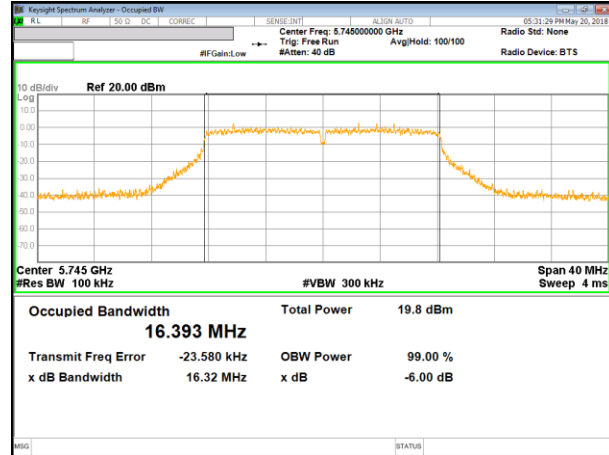

11a Mode Middle Channel

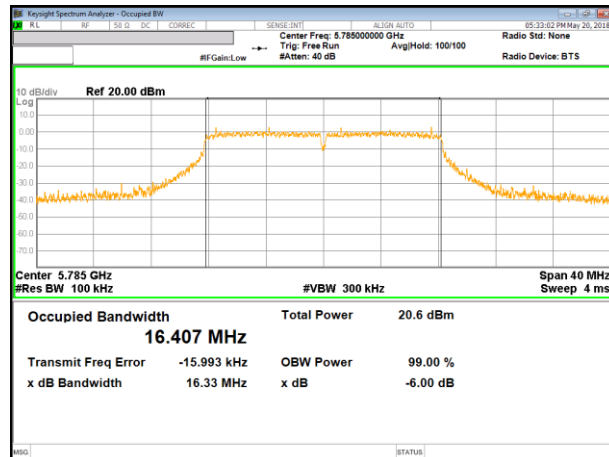


11a Mode High Channel

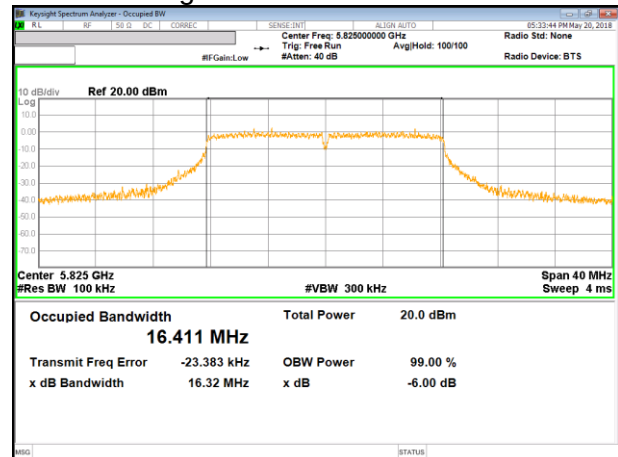


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

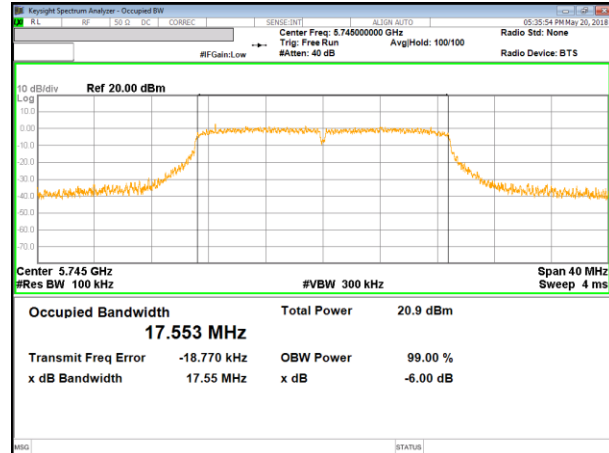

11n HT20 Mode Middle Channel

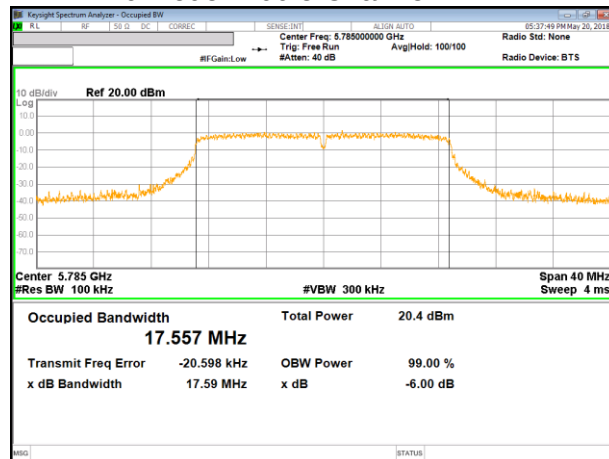


11n HT20 Mode High Channel

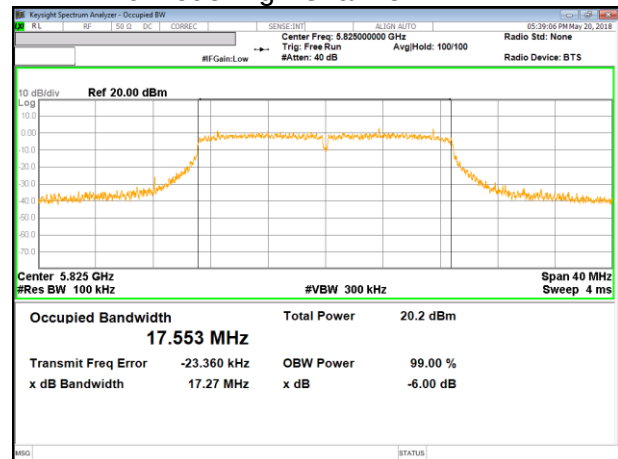


UNII 5.8 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

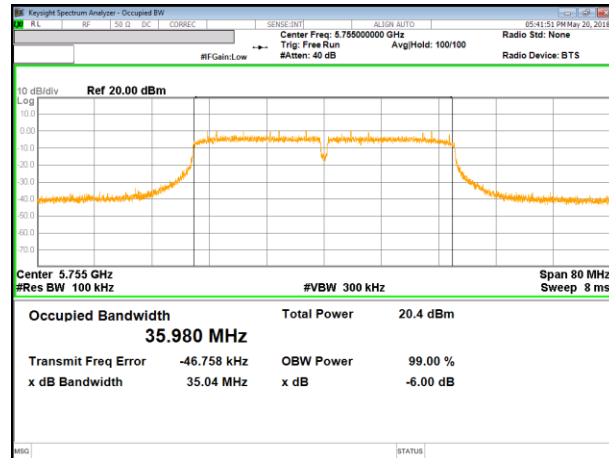

11n HT40 Mode High Channel

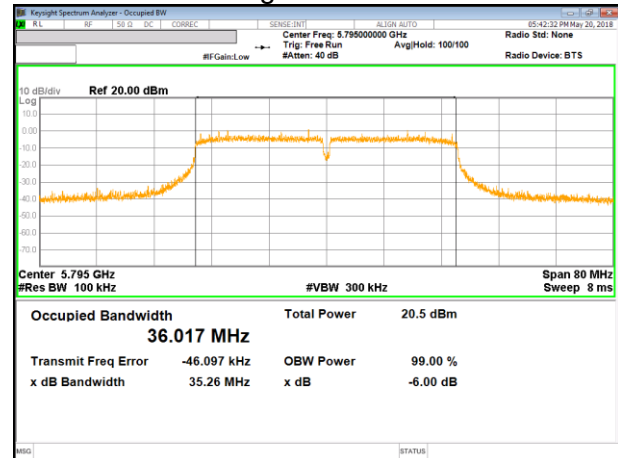

10.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

TEST PROCEDURE

KDB 789033 Method SA-1 and SA-2 are used for PPSD. RBW set to 1 MHz (500 kHz for the band 5.725-5.85 GHz, the VBW $\geq 3 \times$ RBW, RMS detector and trace averaging). Peak marker value of the spectrum is used for PSD. Add duty cycle correction factor for HT40.

KDB 789033 Method PM is used for output power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

5 GHz

Frequency Band [MHz]	Antenna Gain [dBi]
5150 - 5250	-1.41
5250 - 5350	-2.72
5470 - 5725	-3.66
5725 - 5850	-5.64

RESULTS

10.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	19.99	-1.41	-1.41
Mid	5200	20.47	-1.41	-1.41
High	5240	20.69	-1.41	-1.41

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5180	24.00	24.00	11.00
Mid	5200	24.00	24.00	11.00
High	5240	24.00	24.00	11.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	15.36	15.36	24.00	-8.64
Mid	5200	14.92	14.92	24.00	-9.08
High	5240	15.83	15.83	24.00	-8.17

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5180	2.76	2.76	11.00	-8.24
Mid	5200	2.37	2.37	11.00	-8.63
High	5240	3.05	3.05	11.00	-7.95

10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	21.02	-1.41	-1.41
Mid	5200	20.86	-1.41	-1.41
High	5240	20.65	-1.41	-1.41

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5180	24.00	24.00	11.00
Mid	5200	24.00	24.00	11.00
High	5240	24.00	24.00	11.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	15.41	15.41	24.00	-8.59
Mid	5200	14.86	14.86	24.00	-9.14
High	5240	15.88	15.88	24.00	-8.12

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5180	2.61	2.61	11.00	-8.39
Mid	5200	2.04	2.04	11.00	-8.96
High	5240	2.96	2.96	11.00	-8.04

10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5190	42.76	-1.41	-1.41
High	5230	43.21	-1.41	-1.41

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5190	24.00	24.00	11.00
High	5230	24.00	24.00	11.00

Duty Cycle CF [dB]	0.18	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5190	15.42	15.60	24.00	-8.40
High	5230	14.69	14.87	24.00	-9.13

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5190	-0.28	-0.10	11.00	-11.10
High	5230	-0.71	-0.53	11.00	-11.53

10.2.4. 802.11a MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	20.83	-2.72	-2.72
Mid	5300	20.31	-2.72	-2.72
High	5320	19.99	-2.72	-2.72

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5260	24.00	24.00	11.00
Mid	5300	24.00	24.00	11.00
High	5320	24.00	24.00	11.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	15.23	15.23	24.00	-8.77
Mid	5300	15.22	15.22	24.00	-8.78
High	5320	15.52	15.52	24.00	-8.48

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5260	2.42	2.42	11.00	-8.58
Mid	5300	2.72	2.72	11.00	-8.28
High	5320	2.80	2.80	11.00	-8.20

10.2.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	20.75	-2.72	-2.72
Mid	5300	20.52	-2.72	-2.72
High	5320	20.91	-2.72	-2.72

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5260	24.00	24.00	11.00
Mid	5300	24.00	24.00	11.00
High	5320	24.00	24.00	11.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	15.18	15.18	24.00	-8.82
Mid	5300	15.19	15.19	24.00	-8.81
High	5320	15.48	15.48	24.00	-8.52

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5260	2.33	2.33	11.00	-8.67
Mid	5300	2.54	2.54	11.00	-8.47
High	5320	2.67	2.67	11.00	-8.33

10.2.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5270	42.51	-2.72	-2.72
High	5310	44.16	-2.72	-2.72

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5270	24.00	24.00	11.00
High	5310	24.00	24.00	11.00

Duty Cycle CF [dB]	0.18	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5270	14.93	15.11	24.00	-8.89
High	5310	15.72	15.90	24.00	-8.10

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5270	-0.56	-0.38	11.00	-11.38
High	5310	-0.09	0.09	11.00	-10.91

10.2.7. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5500	19.86	-3.66	-3.66
Mid	5580	20.25	-3.66	-3.66
High	5700	21.16	-3.66	-3.66

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5500	23.98	23.98	11.00
Mid	5580	24.00	24.00	11.00
High	5700	24.00	24.00	11.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	15.86	15.86	23.98	-8.12
Mid	5580	14.81	14.81	24.00	-9.19
High	5700	14.83	14.83	24.00	-9.17

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5500	4.02	4.02	11.00	-6.98
Mid	5580	3.11	3.11	11.00	-7.89
High	5700	3.77	3.77	11.00	-7.23

10.2.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5500	20.88	-3.66	-3.66
Mid	5580	20.44	-3.66	-3.66
High	5700	20.73	-3.66	-3.66

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5500	24.00	24.00	11.00
Mid	5580	24.00	24.00	11.00
High	5700	24.00	24.00	11.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	15.84	15.84	24.00	-8.16
Mid	5580	14.78	14.78	24.00	-9.22
High	5700	14.79	14.79	24.00	-9.21

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5500	3.67	3.67	11.00	-7.33
Mid	5580	2.85	2.85	11.00	-8.15
High	5700	3.49	3.49	11.00	-7.51

10.2.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5510	42.88	-3.66	-3.66
Mid	5590	42.30	-3.66	-3.66
High	5670	43.04	-3.66	-3.66

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5510	24.00	24.00	11.00
Mid	5590	24.00	24.00	11.00
High	5670	24.00	24.00	11.00

Duty Cycle CF [dB]	0.18	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5510	15.47	15.65	24.00	-8.35
Mid	5590	15.63	15.81	24.00	-8.19
High	5670	15.55	15.73	24.00	-8.27

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5510	-0.05	0.13	11.00	-10.87
Mid	5590	0.19	0.36	11.00	-10.64
High	5670	0.97	1.14	11.00	-9.86

10.2.10. 802.11a MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5745	20.52	-5.64	-5.64
Mid	5785	20.21	-5.64	-5.64
High	5825	20.41	-5.64	-5.64

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/500kHz]
Low	5745	30.00	30.00	30.00
Mid	5785	30.00	30.00	30.00
High	5825	30.00	30.00	30.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	14.81	14.81	30.00	-15.19
Mid	5785	15.69	15.69	30.00	-14.31
High	5825	15.40	15.40	30.00	-14.60

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/500kHz]	Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]	PPSD Margin [dB]
Low	5745	0.52	0.52	30.00	-29.48
Mid	5785	1.68	1.68	30.00	-28.33
High	5825	1.38	1.38	30.00	-28.62

10.2.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5745	20.75	-5.64	-5.64
Mid	5785	20.78	-5.64	-5.64
High	5825	20.89	-5.64	-5.64

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm/500kHz]
Low	5745	30.00	30.00	30.00
Mid	5785	30.00	30.00	30.00
High	5825	30.00	30.00	30.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	15.86	15.86	30.00	-14.14
Mid	5785	15.56	15.56	30.00	-14.44
High	5825	15.44	15.44	30.00	-14.56

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm/500kHz]	Total Corr'd PPSP [dBm/500kHz]	PPSP Limit [dBm/500kHz]	PPSP Margin [dB]
Low	5745	1.55	1.55	30.00	-28.45
Mid	5785	1.54	1.54	30.00	-28.46
High	5825	1.19	1.19	30.00	-28.81

10.2.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5755	43.27	-5.64	-5.64
High	5795	42.94	-5.64	-5.64

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/500kHz]
Low	5755	30.00	30.00	30.00
High	5795	30.00	30.00	30.00

Duty Cycle CF [dB]	0.18	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5755	14.99	15.17	30.00	-14.83
High	5795	15.35	15.53	30.00	-14.47


PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/500kHz]	Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]	PPSD Margin [dB]
Low	5755	-1.59	-1.42	30.00	-31.42
High	5795	-1.55	-1.37	30.00	-31.37


10.2.13. PPSD PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

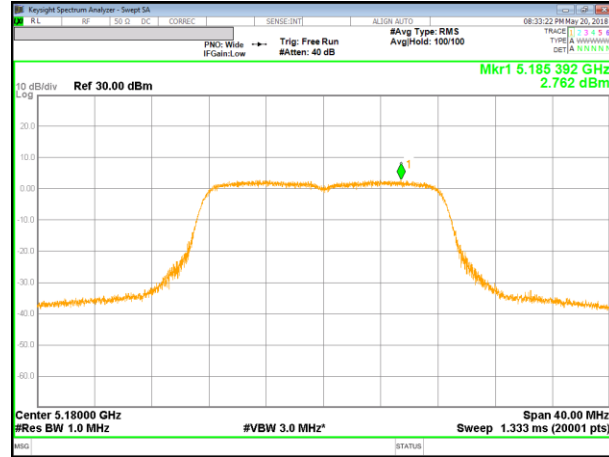

11a Mode Middle Channel

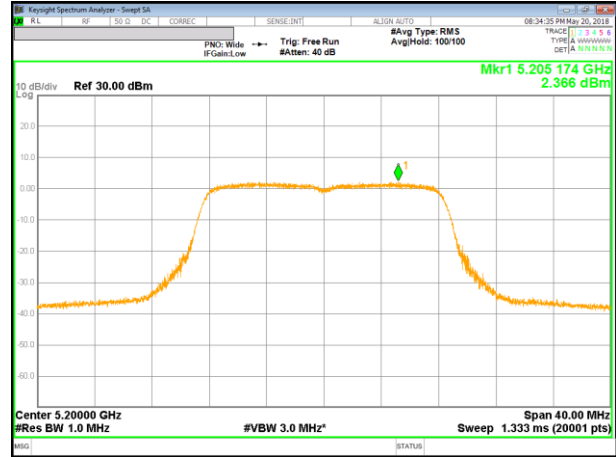


11a Mode High Channel

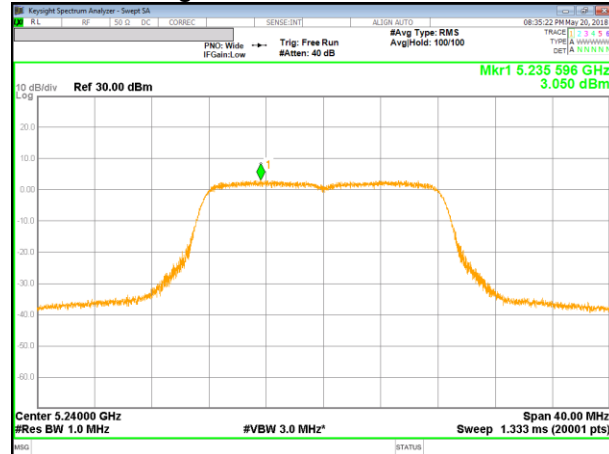


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

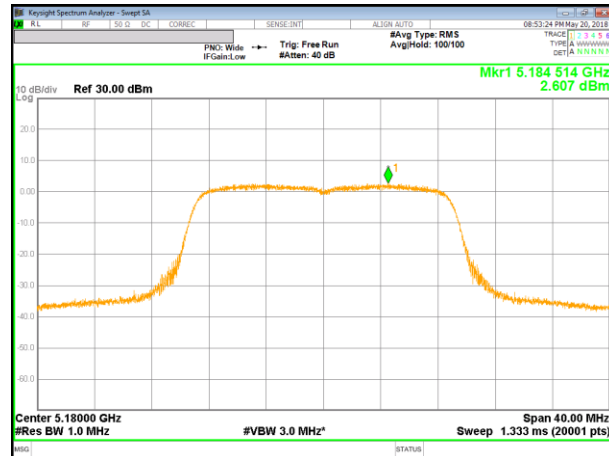


11n HT20 Mode Middle Channel

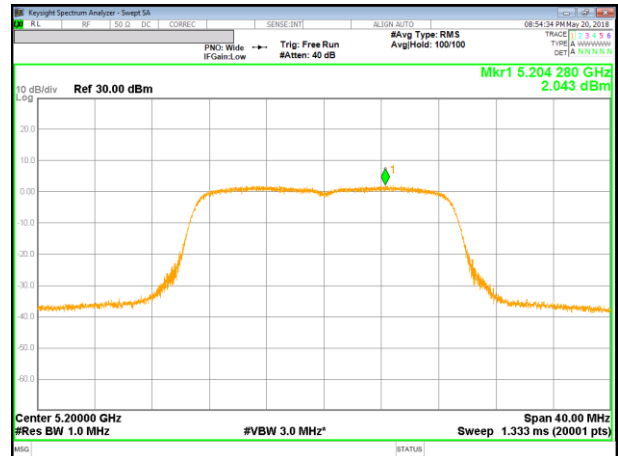

11n HT20 Mode High Channel

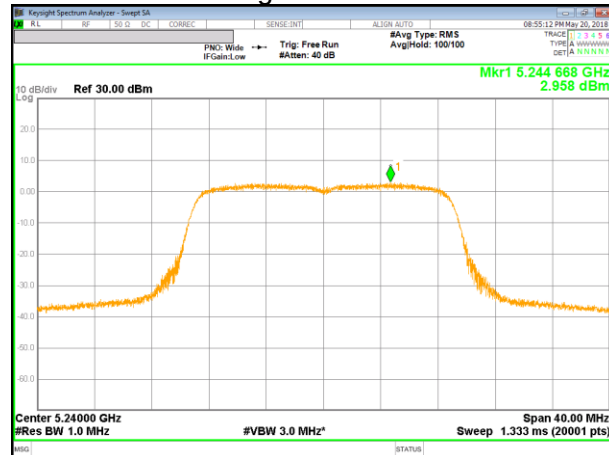


UNII 5.2 GHz IEEE 802.11n HT40 mode

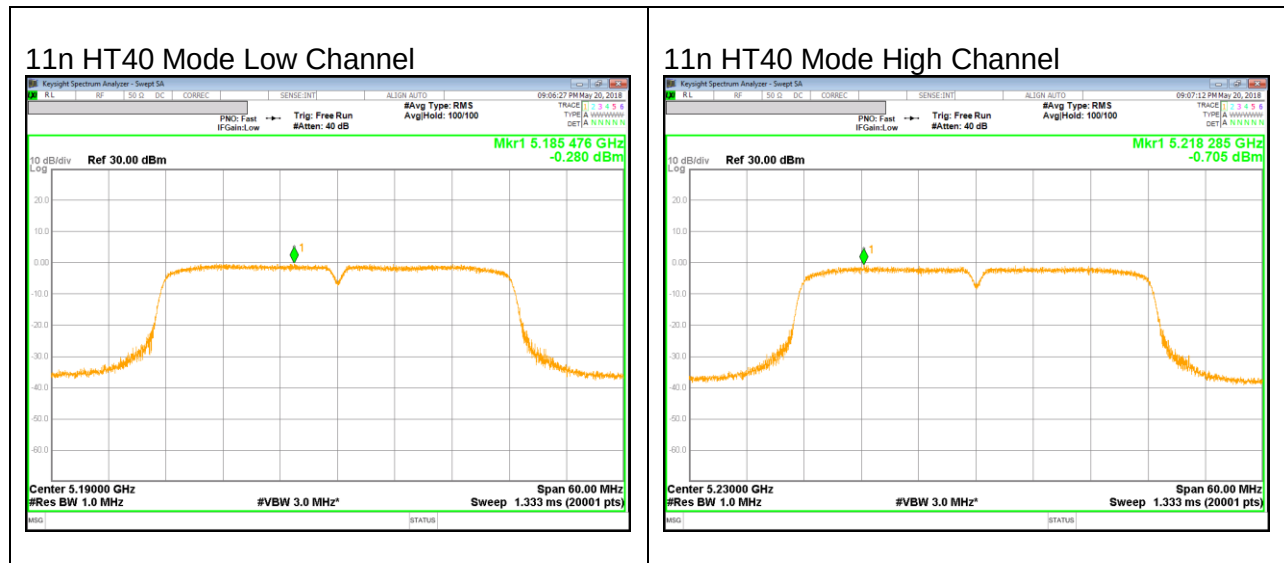


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

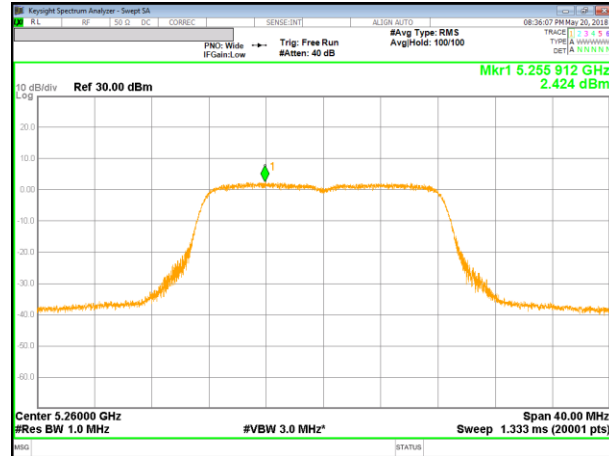

11a Mode Middle Channel

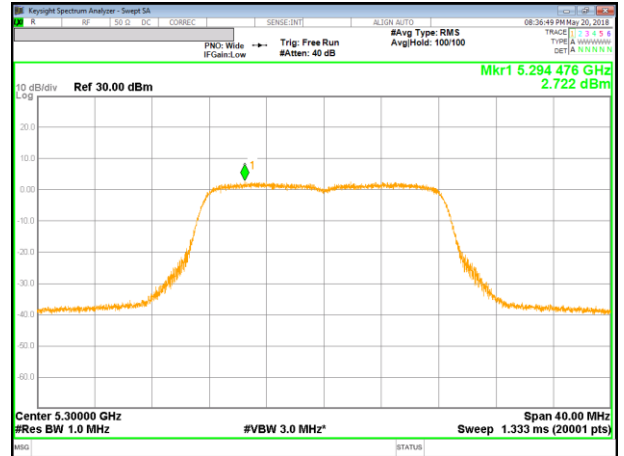


11a Mode High Channel

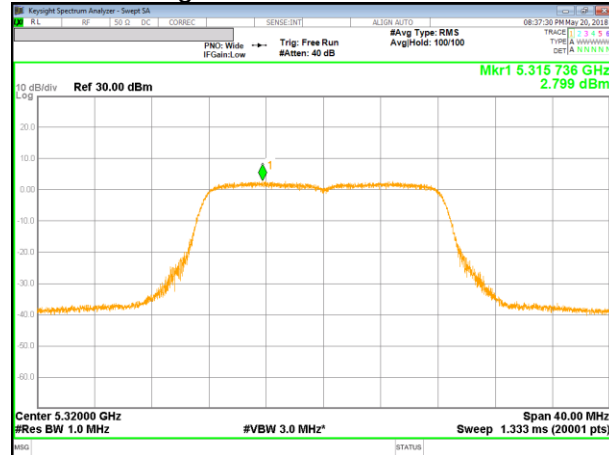


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

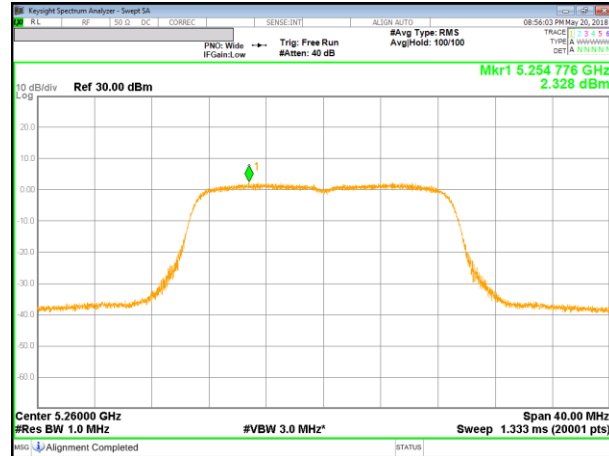


11n HT20 Mode Middle Channel

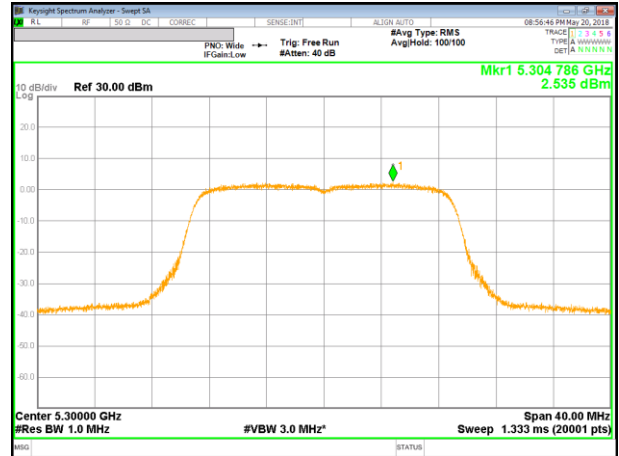

11n HT20 Mode High Channel

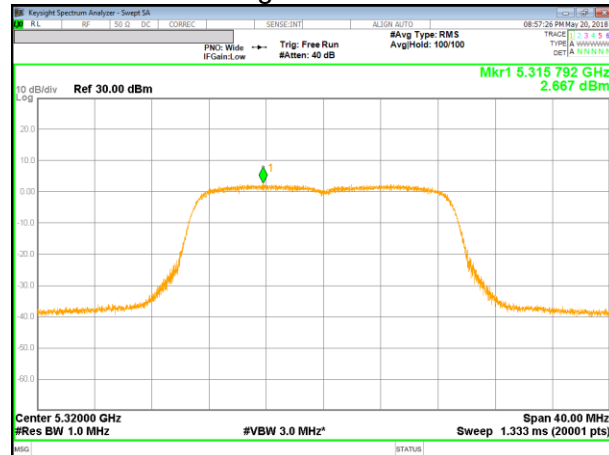


UNII 5.3 GHz IEEE 802.11n HT40 mode

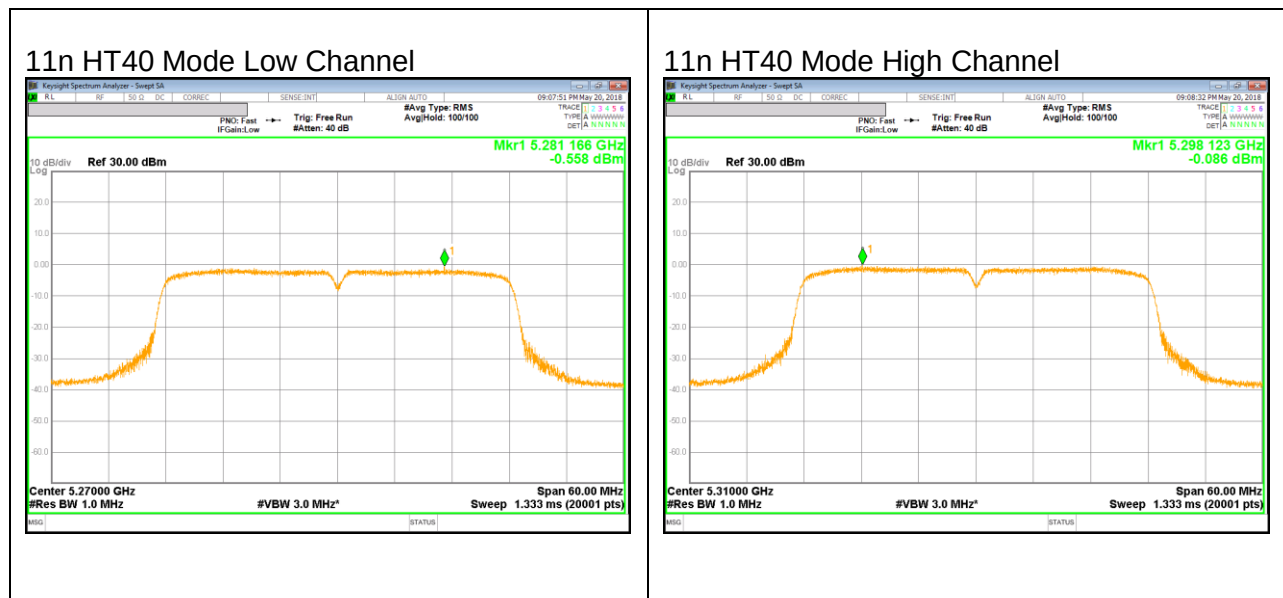


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

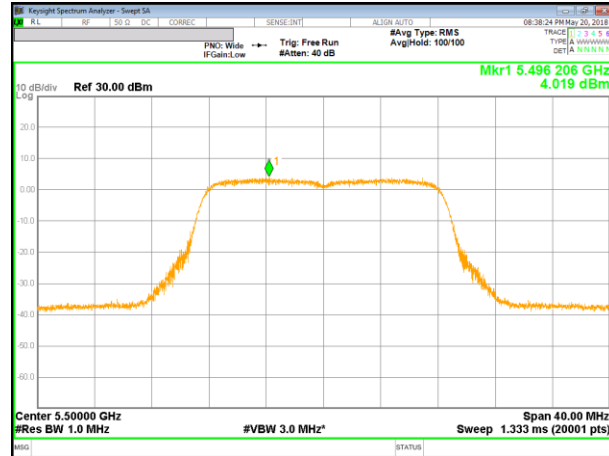


11a Mode Middle Channel

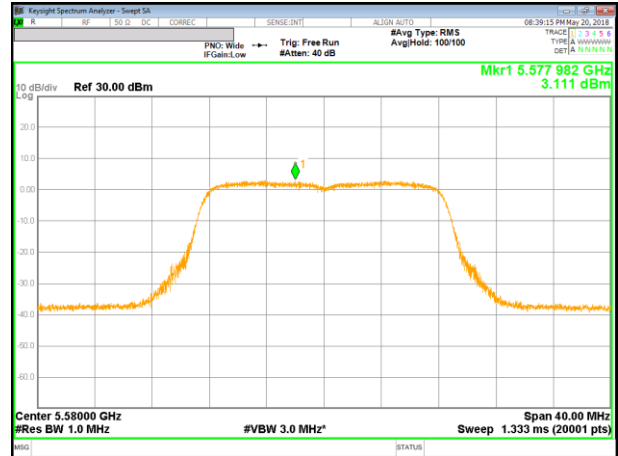

11a Mode High Channel

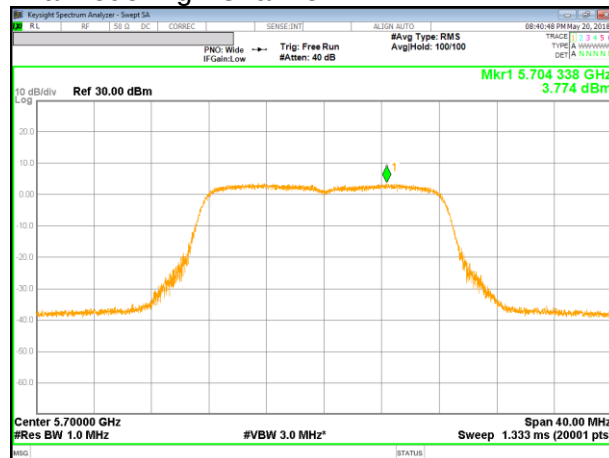


UNII 5.5 GHz IEEE 802.11n HT20 mode

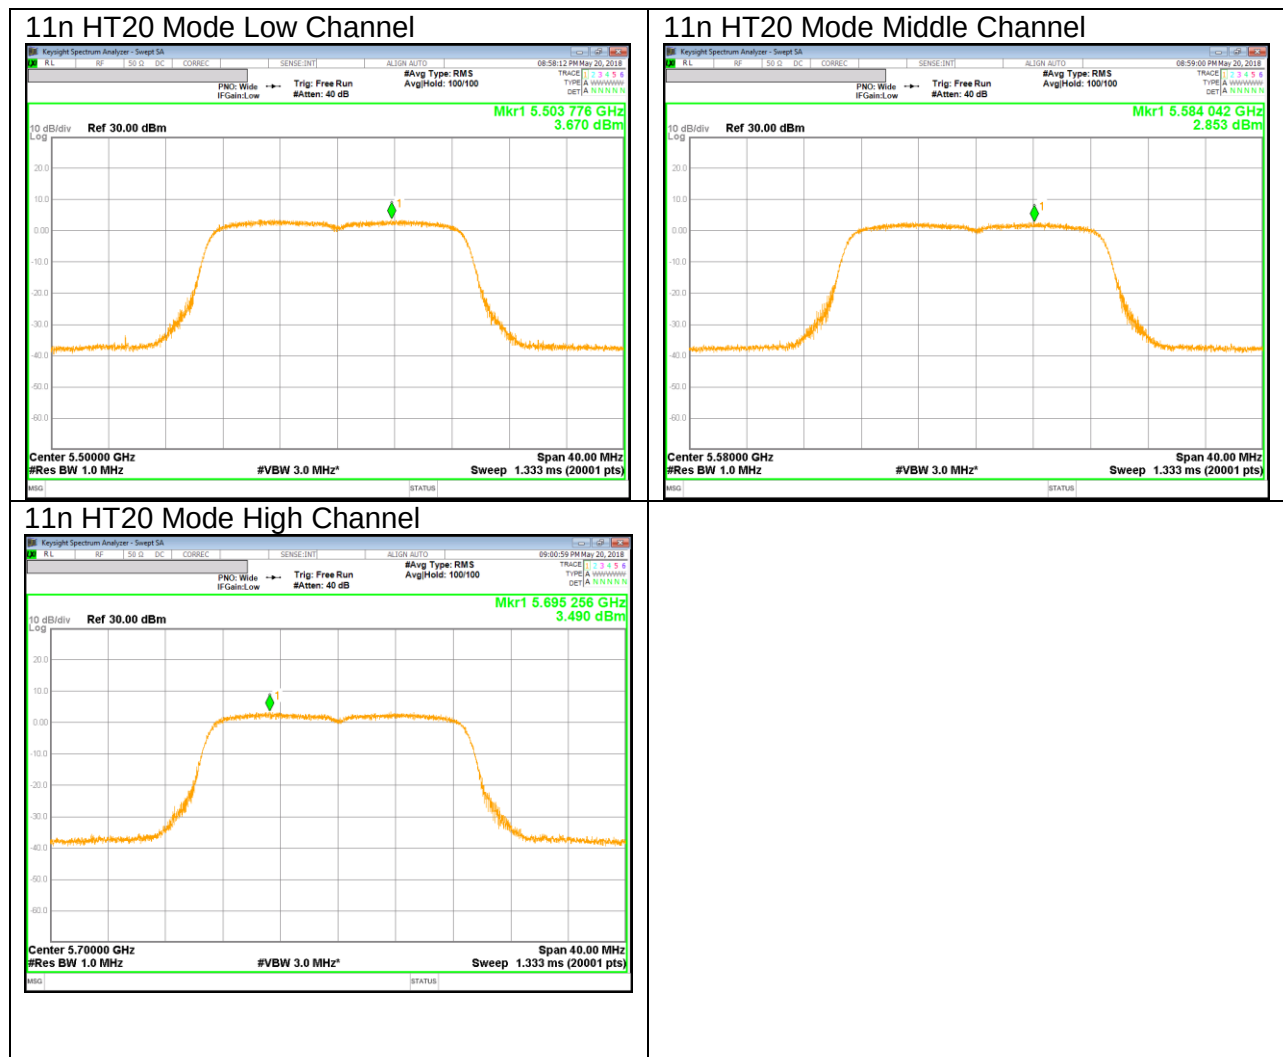


UNII 5.5 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Low Channel

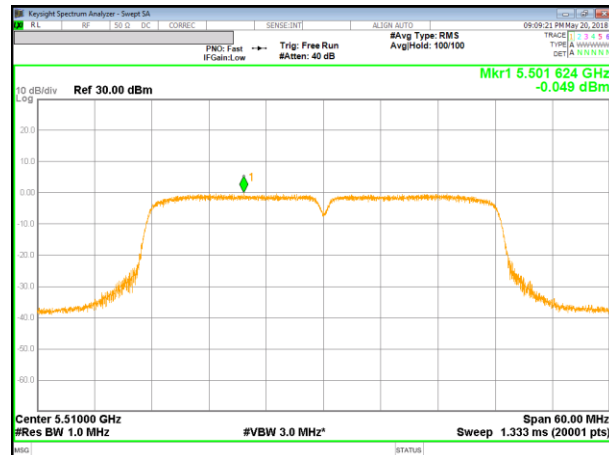

11n HT40 Mode Middle Channel

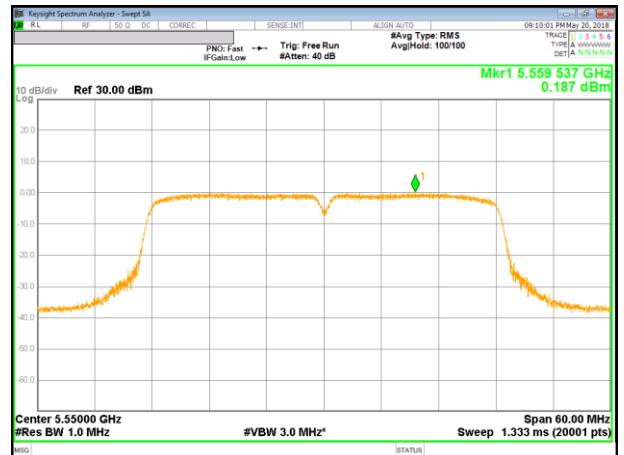


11n HT40 Mode High Channel

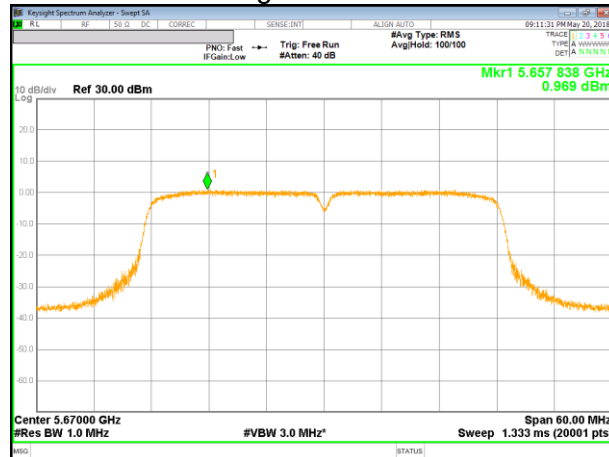


UNII 5.8 GHz IEEE 802.11a mode


11a Mode Low Channel

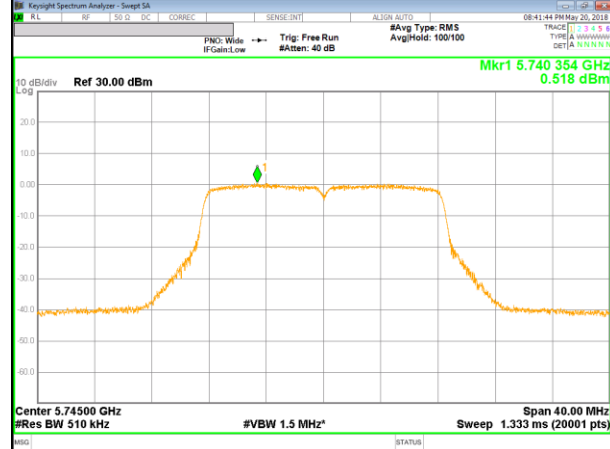

11a Mode Middle Channel

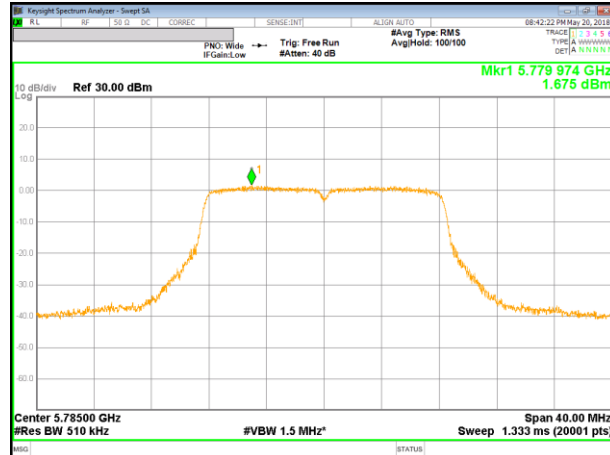


11a Mode High Channel

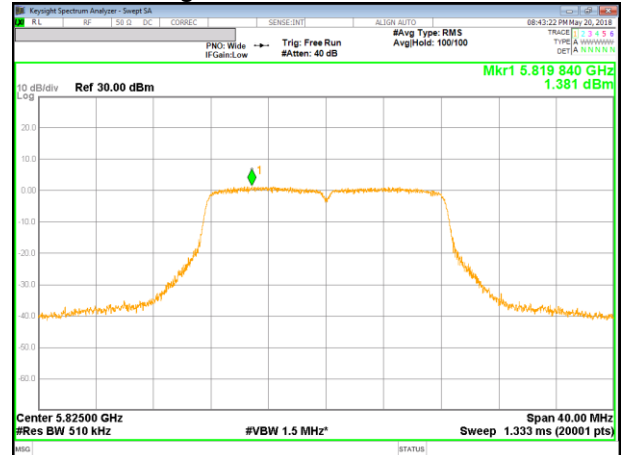


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

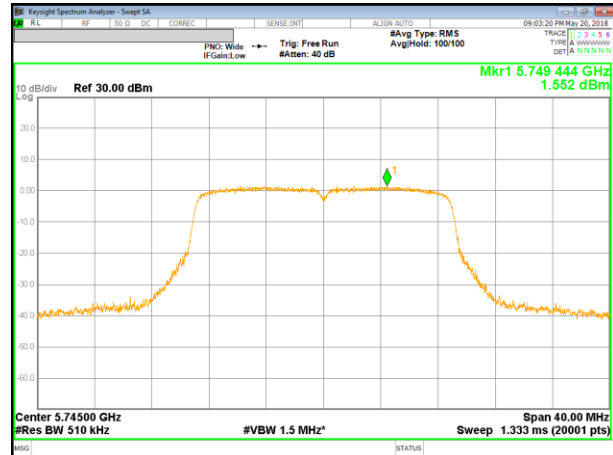


11n HT20 Mode Middle Channel

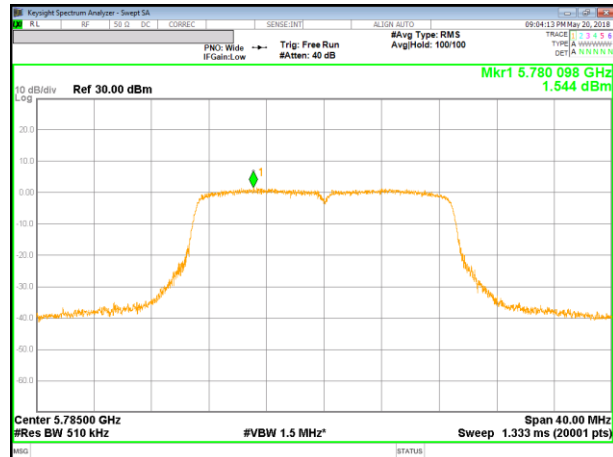

11n HT20 Mode High Channel

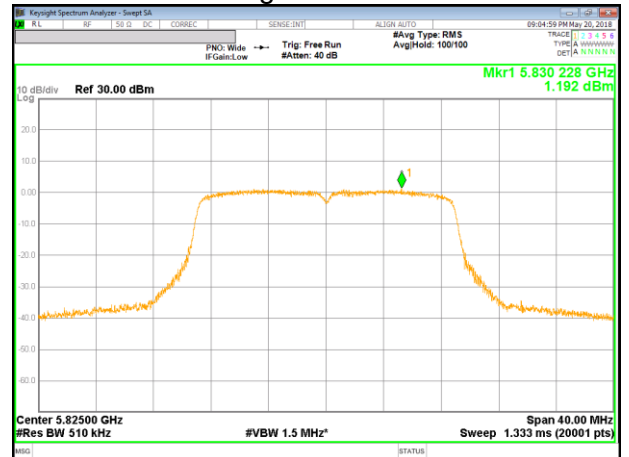

UNII 5.8 GHz IEEE 802.11n HT40 mode

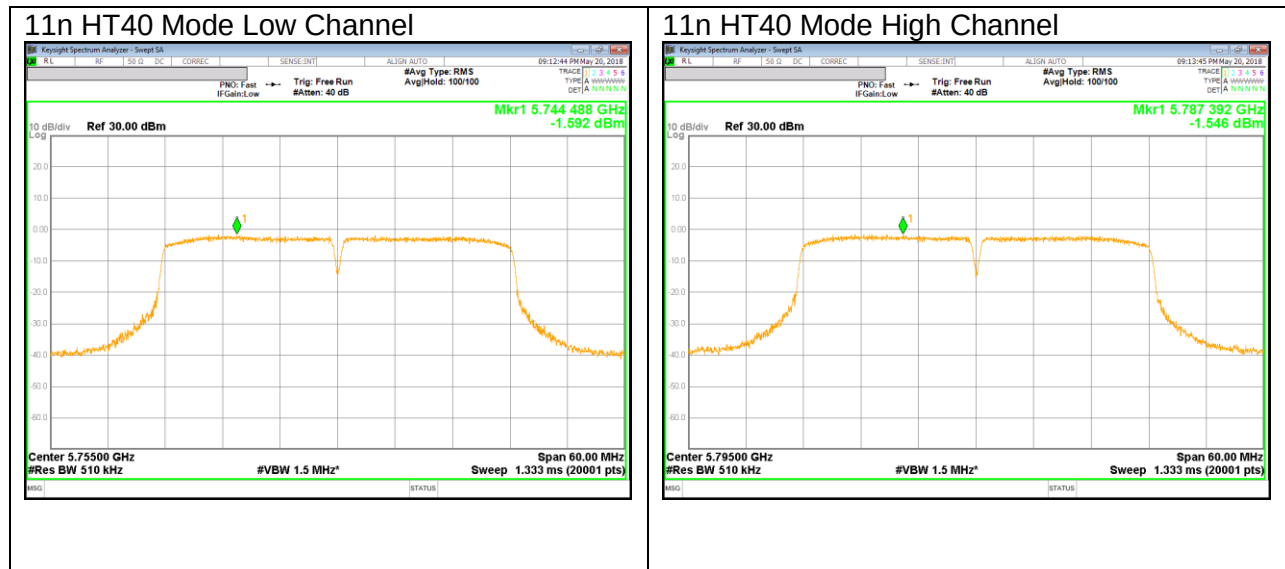

11. TRANSMITTER ABOVE 1 GHz

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC §15.407 (b)

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth

in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Note

- Limit translation to field strength level (FCC §15.407)

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 = -27\text{dBm} + 95.2 = 68.2\text{dBuV/m}$$

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 = -17\text{dBm} + 95.2 = 78.2\text{dBuV/m}$$

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Reference to KDB 789033 D02 v02r01 UNII part G) 6) c) Method AD:

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor to the reading offset for average measurements.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.1. 5.2 GHz

11.1.1. TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

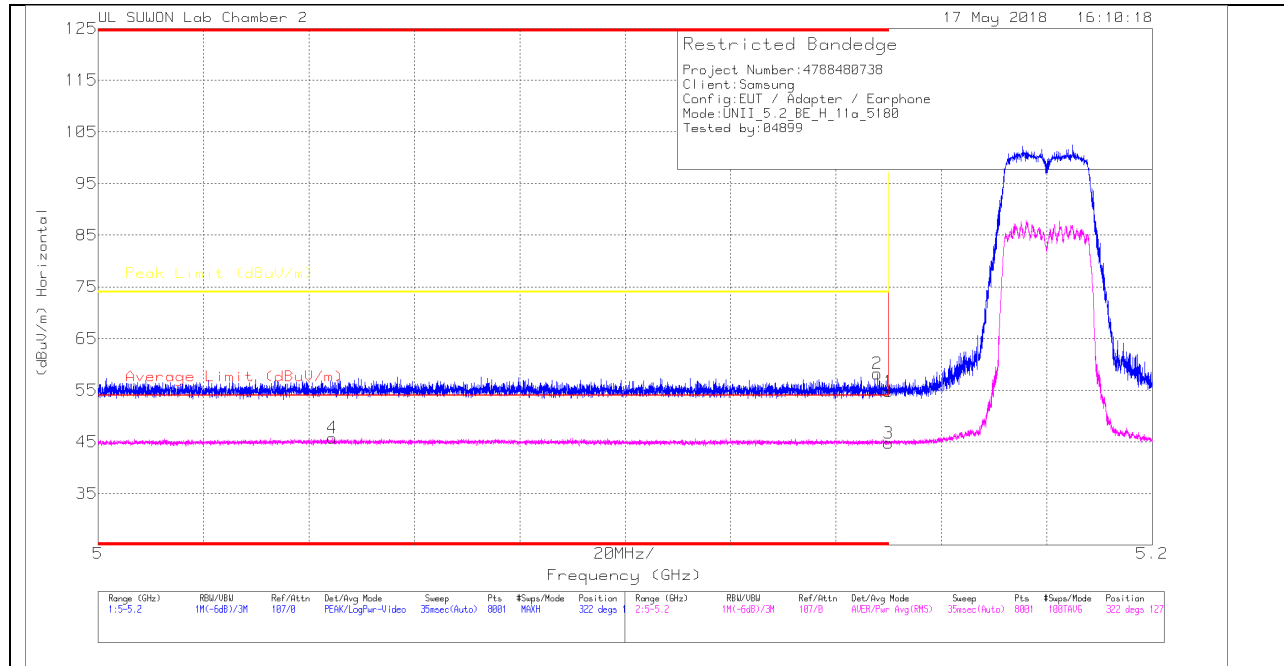

HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_311700168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	5.15	36.02	Pk	34	-15.3	0	54.72	-	-	74	-19.28	322	127	H
2	* 5.148	39.52	Pk	34	-15.3	0	58.22	-	-	74	-15.78	322	127	H
3	5.15	26.04	RMS	34	-15.3	0	44.74	54	-9.26	-	-	322	127	H
4	* 5.044	27.05	RMS	33.9	-15.2	0	45.75	54	-8.25	-	-	322	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT



VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117(00168724)	10dB(dB)	OC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	33.68	Pk	34	-15.3	0	52.38	-	-	74	-21.62	333	212	V
2	* 5.113	38.49	Pk	33.9	-15.3	0	57.09	-	-	74	-16.91	333	212	V
3	5.15	26.45	RMS	34	-15.3	0	45.15	54	-8.85	-	-	333	212	V
4	* 5.048	27.01	RMS	33.9	-15.2	0	45.71	54	-8.29	-	-	333	212	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

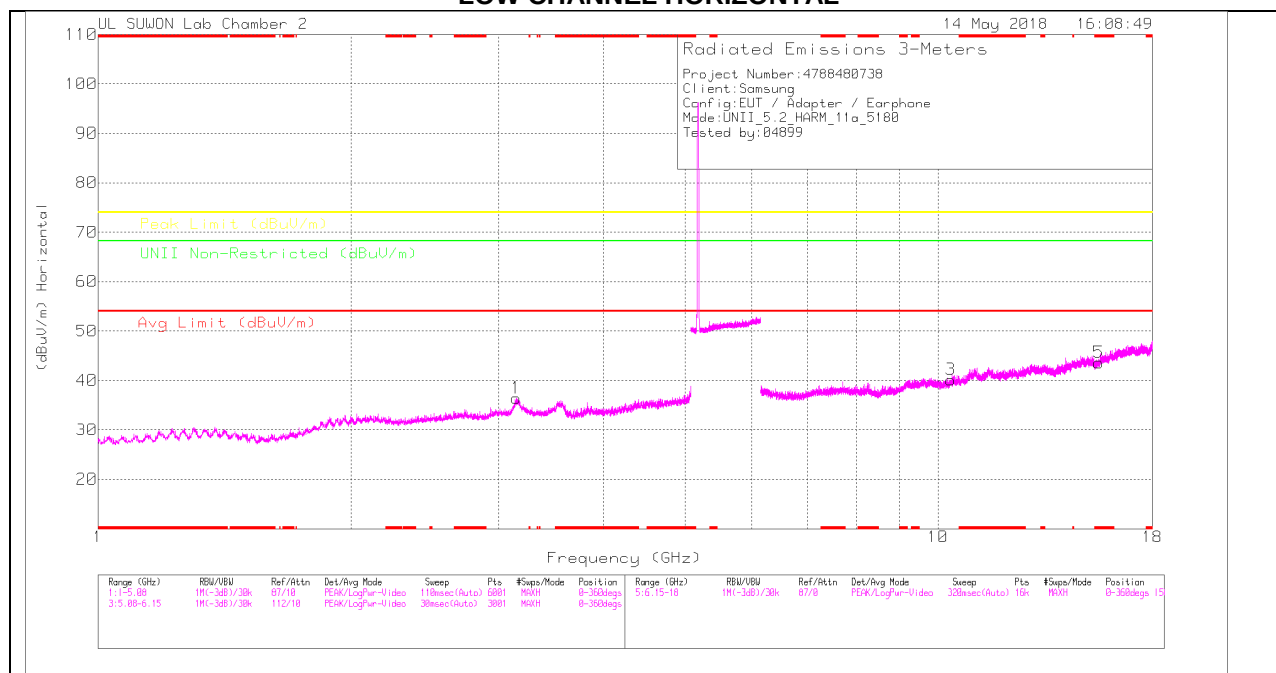

LOW CHANNEL VERTICAL

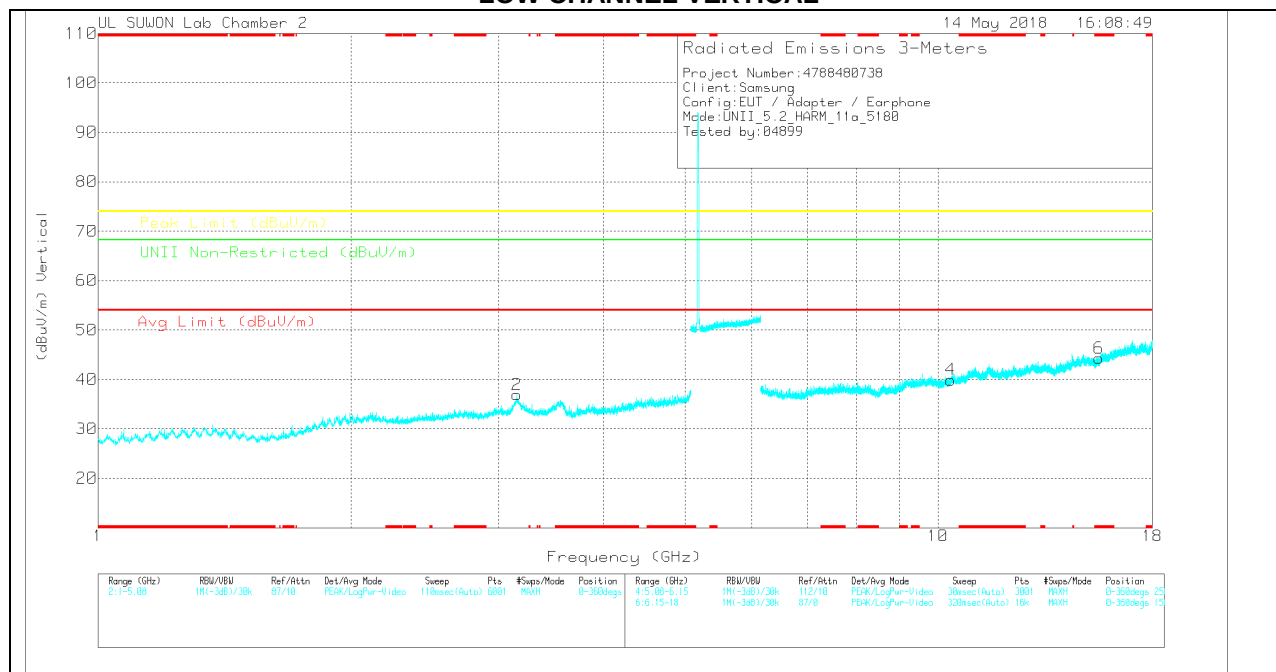

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170331_31170016 8724	SGHz_LF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULRI Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	3.149	27.85	PK	34.8	-26.2	0	36.45	-	-	-	-	68.2	-31.75	0-360	150	H
2	3.153	28.12	PK	34.8	-26	0	36.92	-	-	-	-	68.2	-31.28	0-360	250	V
3	10.36	19.37	PK	37.5	-16.7	0	40.17	-	-	-	-	68.2	-28.03	0-360	150	H
5	* 15.537	18.41	PK	39.7	-14.5	0	43.61	-	-	74	-30.39	-	-	0-360	250	H
4	10.362	19.12	PK	37.5	-16.7	0	39.92	-	-	-	-	68.2	-28.28	0-360	150	V
6	* 15.538	18.88	PK	39.8	-14.4	0	44.28	-	-	74	-29.72	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

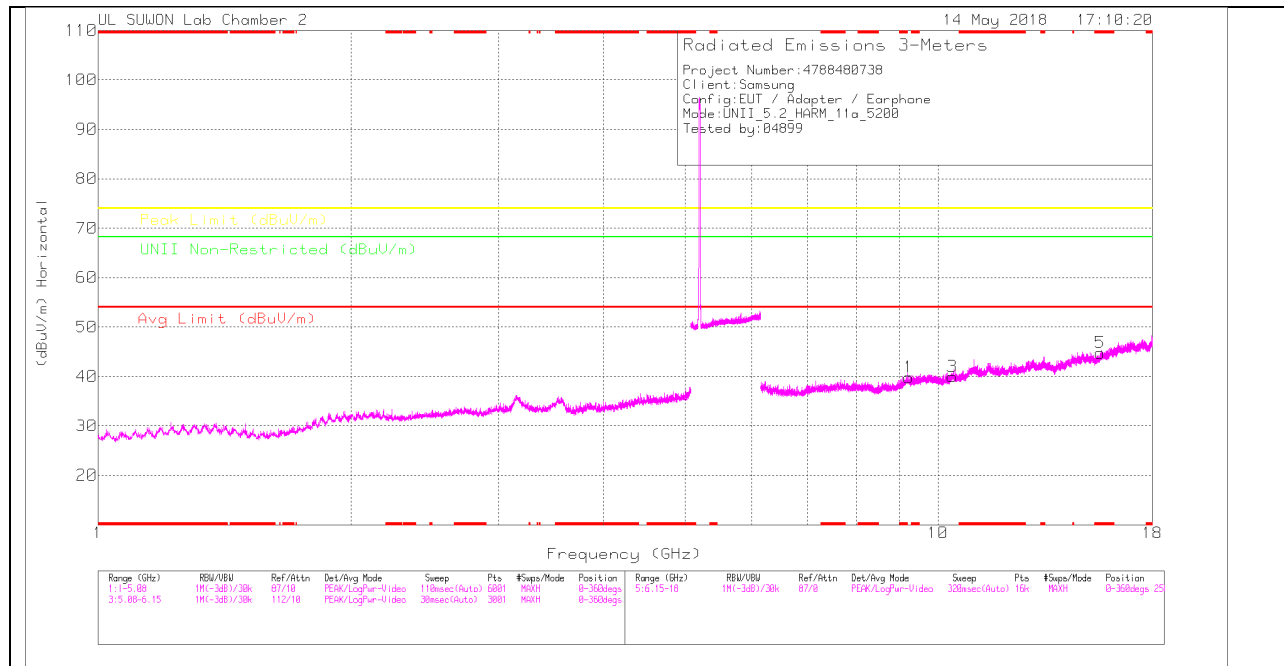

MID CHANNEL VERTICAL

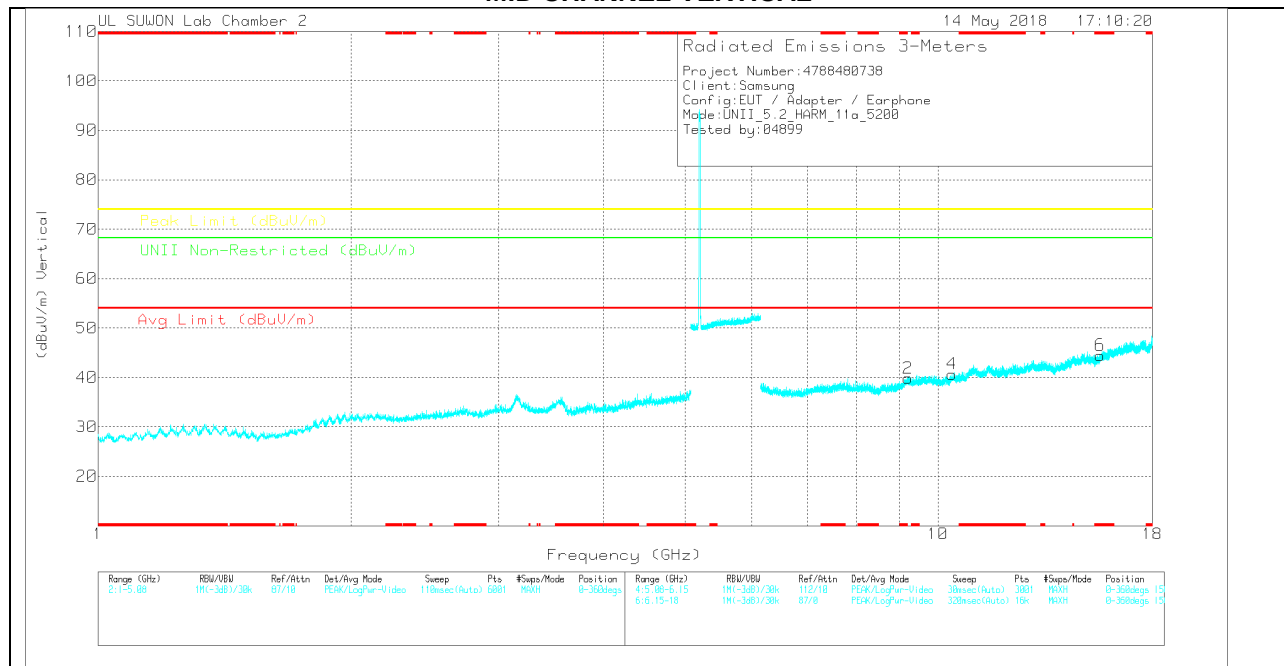

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	170531_1117(001887 24)	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	9.229	21	PK	36.4	-17.6	0	39.8	-	-	-	-	68.2	-28.4	0-360	250	H
3	10.402	18.88	PK	37.5	-16.4	0	39.98	-	-	-	-	68.2	-28.22	0-360	250	H
5	* 15.598	19.57	PK	39.8	-14.6	0	44.77	-	-	74	-29.23	-	-	0-360	150	H
2	9.21	21.12	PK	36.4	-17.7	0	39.82	-	-	-	-	68.2	-28.38	0-360	250	V
4	10.398	19.58	PK	37.5	-16.4	0	40.68	-	-	-	-	68.2	-27.52	0-360	150	V
6	* 15.601	19.17	PK	39.8	-14.5	0	44.47	-	-	74	-29.53	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

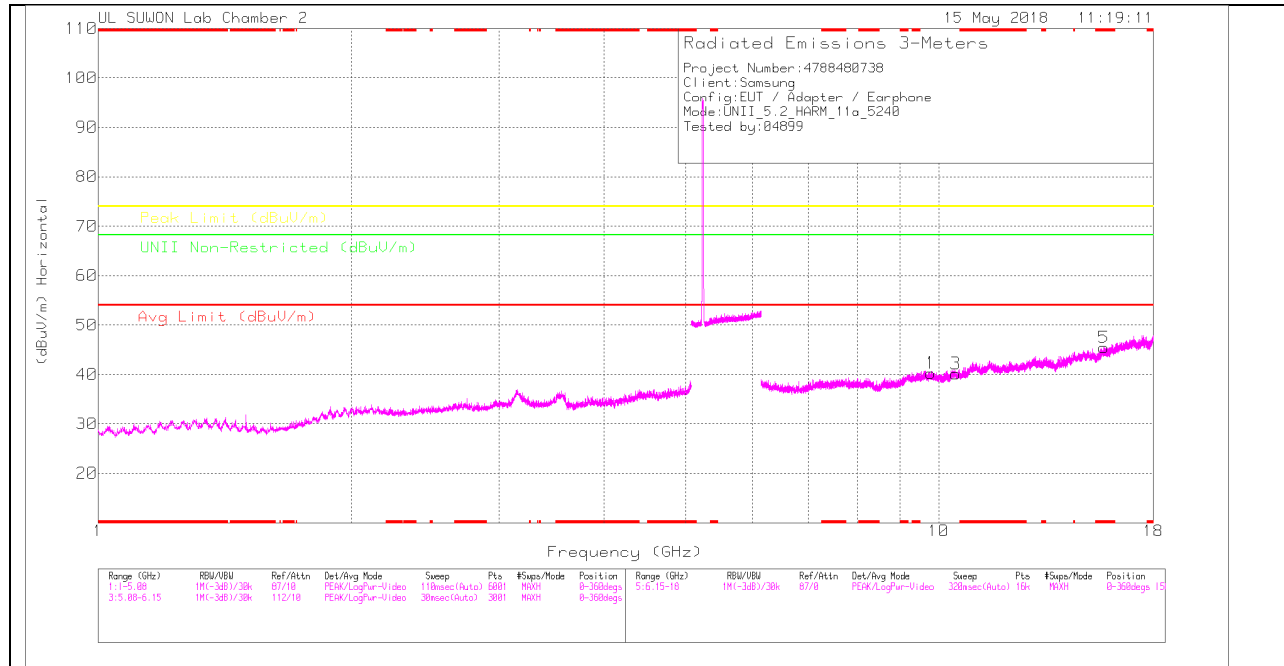

HIGH CHANNEL VERTICAL

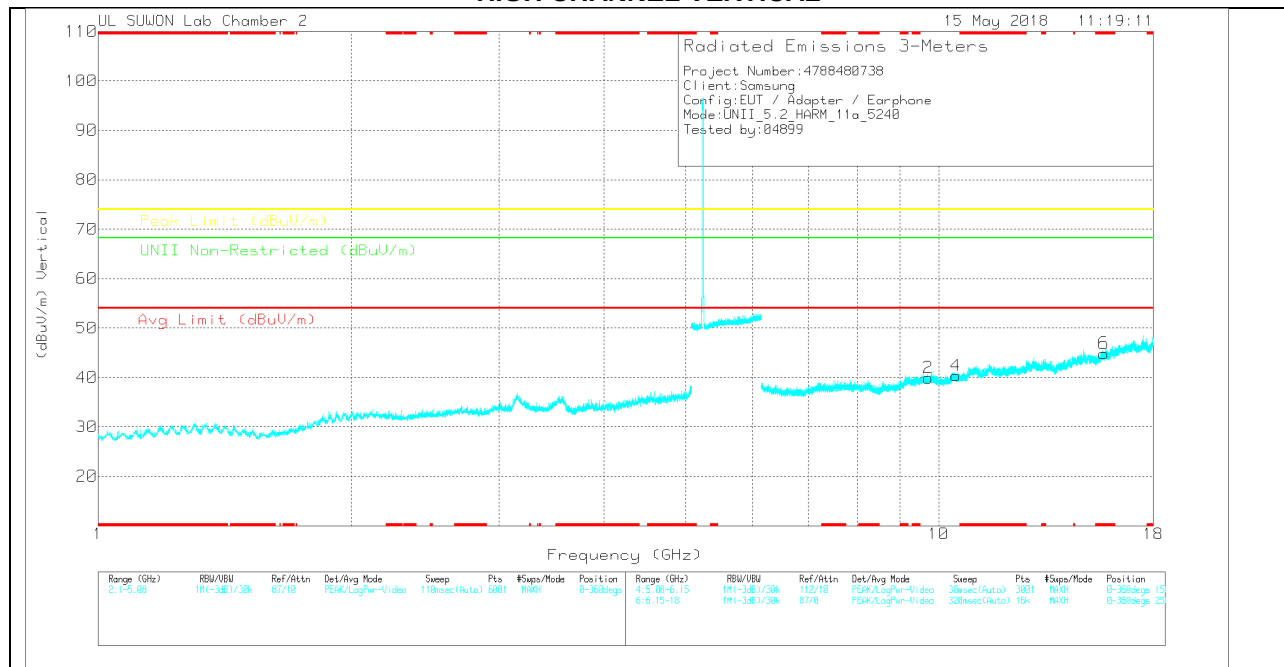

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117003887 24]	60Hz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unid Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	9.783	20.56	PK	37	-17.3	0	40.26	-	-	-	-	68.2	-27.94	0-360	150	H
3	10.475	19.04	PK	37.5	-16.4	0	40.14	-	-	-	-	68.2	-28.06	0-360	250	H
5	* 15.721	20.35	PK	39.9	-14.8	0	45.45	-	-	74	-28.55	-	-	0-360	150	H
2	9.716	20.83	PK	36.8	-17.7	0	39.93	-	-	-	-	68.2	-28.27	0-360	150	V
4	10.479	19.25	PK	37.5	-16.4	0	40.35	-	-	-	-	68.2	-27.85	0-360	150	V
6	* 15.721	19.75	PK	39.9	-14.8	0	44.85	-	-	74	-29.15	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.1.2. TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

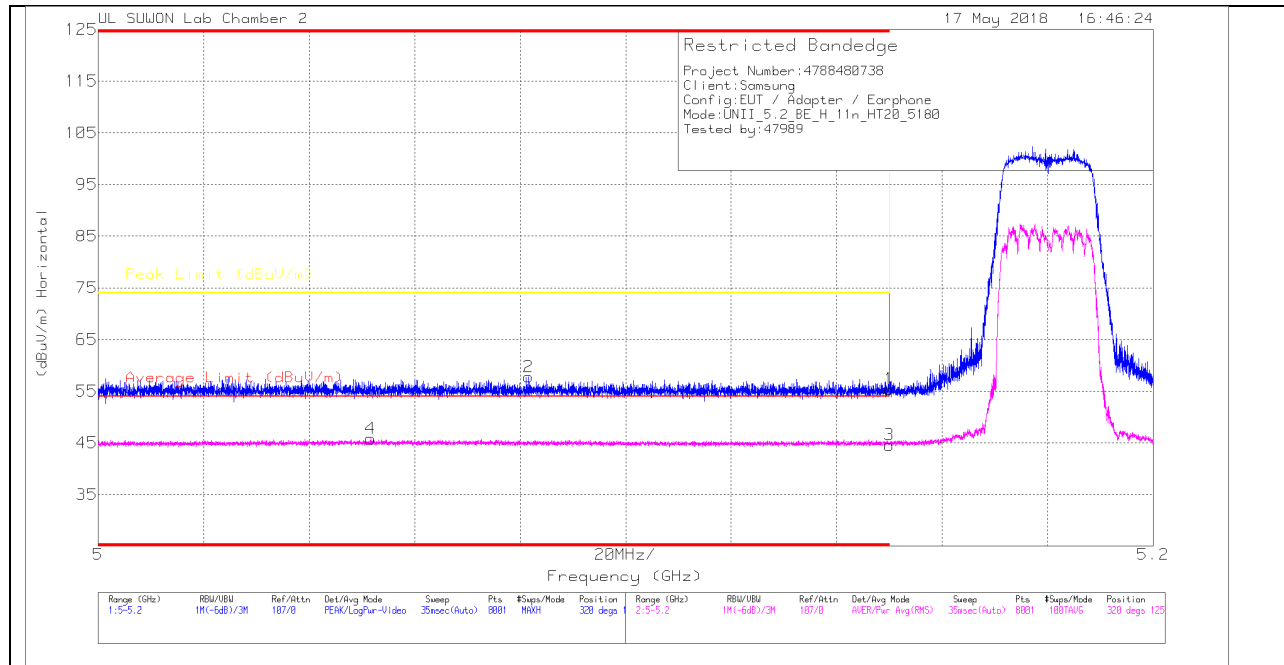

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117(00168724)	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	5.15	36.71	Pk	34	-15.3	0	55.41	-	-	74	-18.59	320	125	H
2	* 5.082	39.06	Pk	33.9	-15.2	0	57.76	-	-	74	-16.24	320	125	H
3	5.15	25.9	RMS	34	-15.3	0	44.6	54	-9.4	-	-	320	125	H
4	* 5.052	27.12	RMS	33.9	-15.2	0	45.82	54	-8.18	-	-	320	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

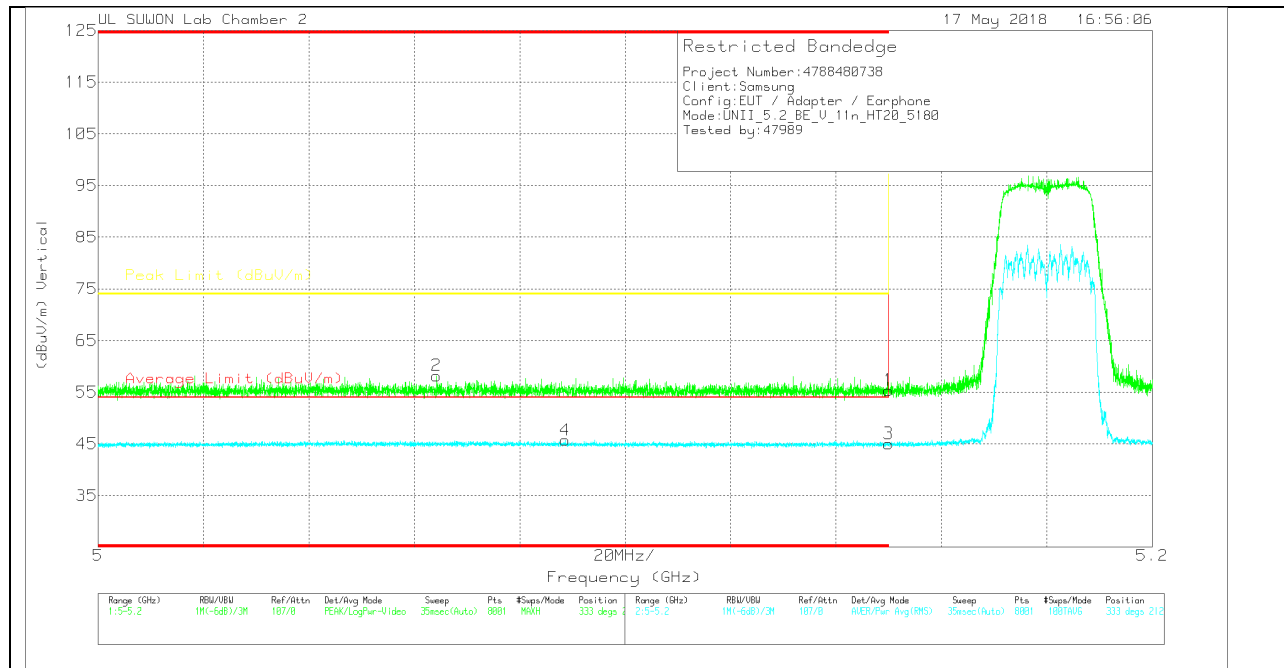

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_311700168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	5.15	36.68	Pk	34	-15.3	0	55.38	-	-	74	-18.62	333	212	V
2	* 5.064	39.51	Pk	33.9	-15.2	0	58.21	-	-	74	-15.79	333	212	V
3	5.15	26.34	RMS	34	-15.3	0	45.04	54	-8.96	-	-	333	212	V
4	* 5.089	27.04	RMS	33.9	-15.2	0	45.74	54	-8.26	-	-	333	212	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

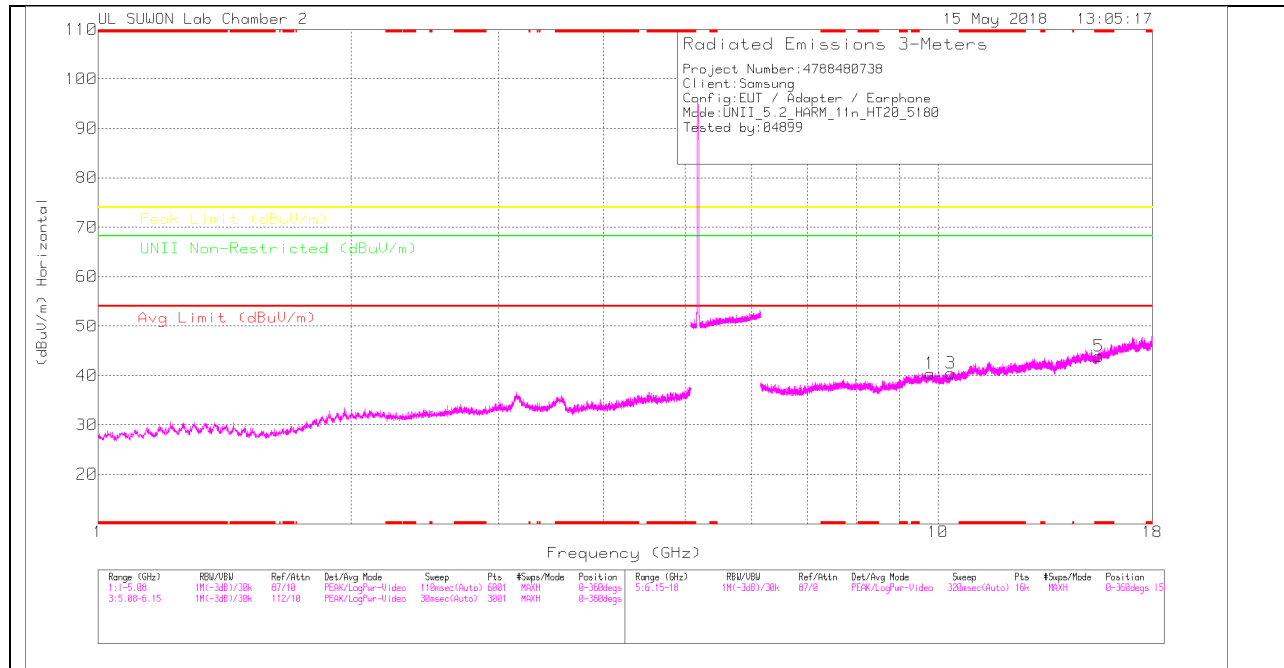

LOW CHANNEL VERTICAL

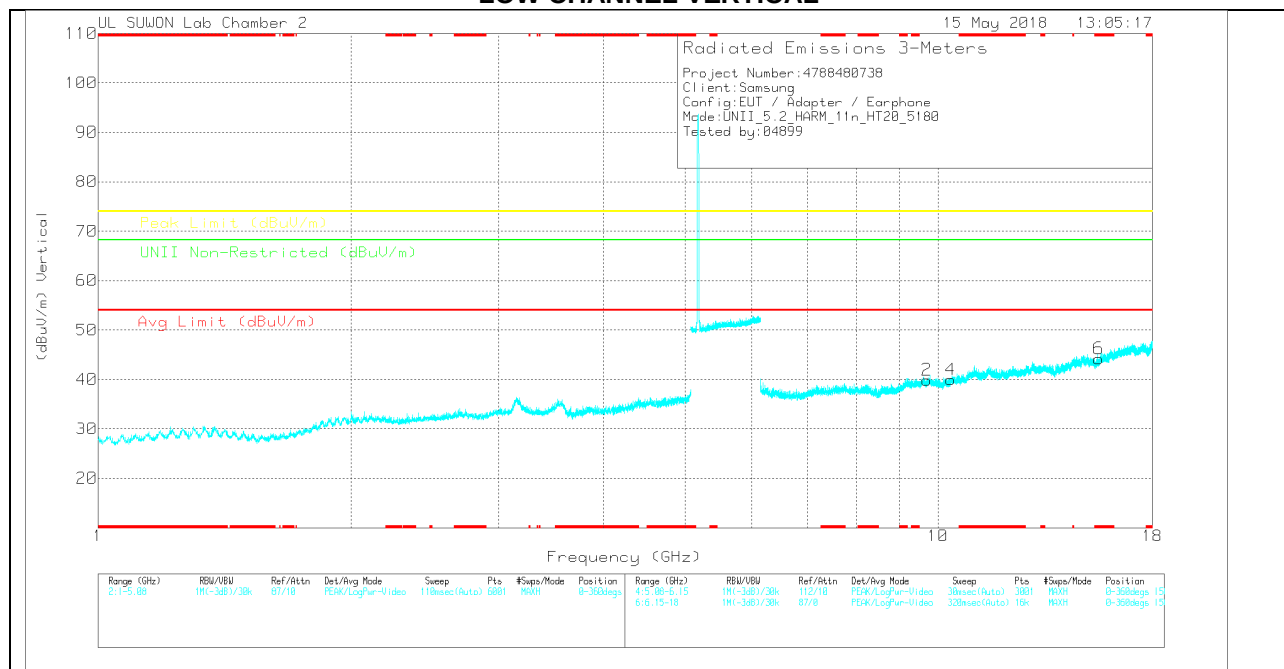

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	170531_1117(001887 24)	6GHz_HF(0dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	9.788	20.69	PK	37	-17.3	0	40.39	-	-	-	-	68.2	-27.81	0-360	150	H
3	10.354	19.75	PK	37.5	-16.8	0	40.45	-	-	-	-	68.2	-27.75	0-360	150	H
5	* 15.546	18.58	PK	39.8	-14.5	0	43.88	-	-	74	-30.12	-	-	0-360	250	H
2	9.703	20.9	PK	36.8	-17.8	0	39.9	-	-	-	-	68.2	-28.3	0-360	250	V
4	10.36	19.17	PK	37.5	-16.7	0	39.97	-	-	-	-	68.2	-28.23	0-360	150	V
6	* 15.537	19.02	PK	39.7	-14.5	0	44.22	-	-	74	-29.78	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

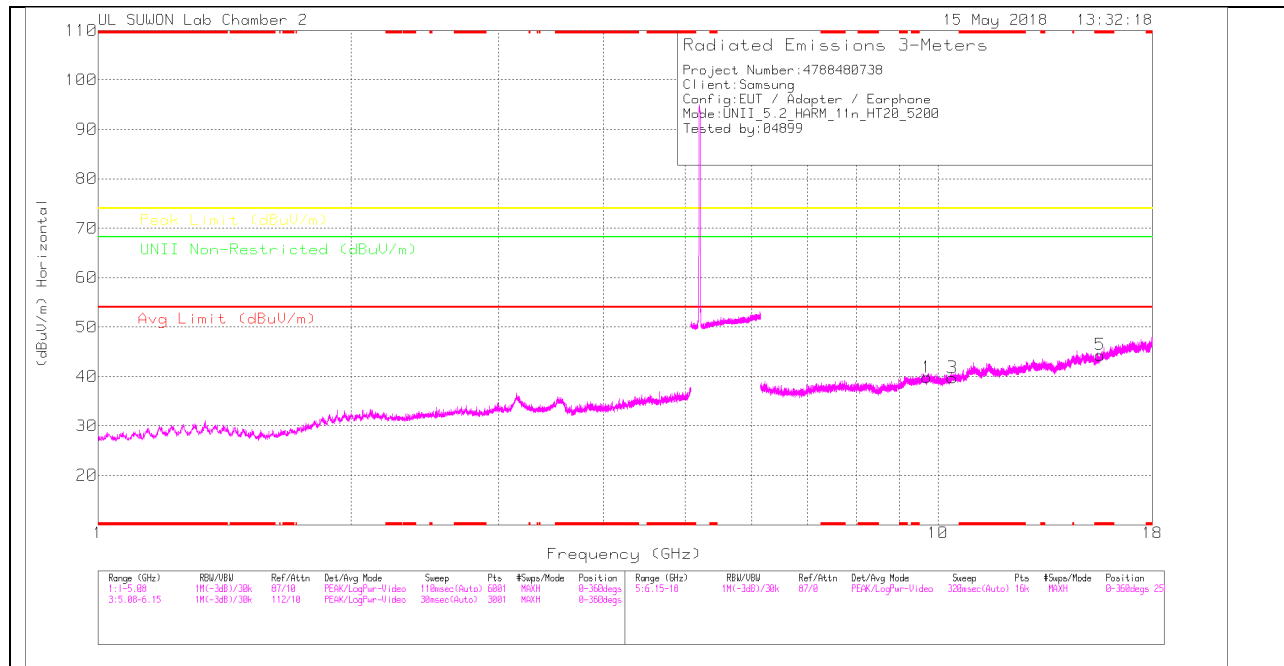

MID CHANNEL VERTICAL

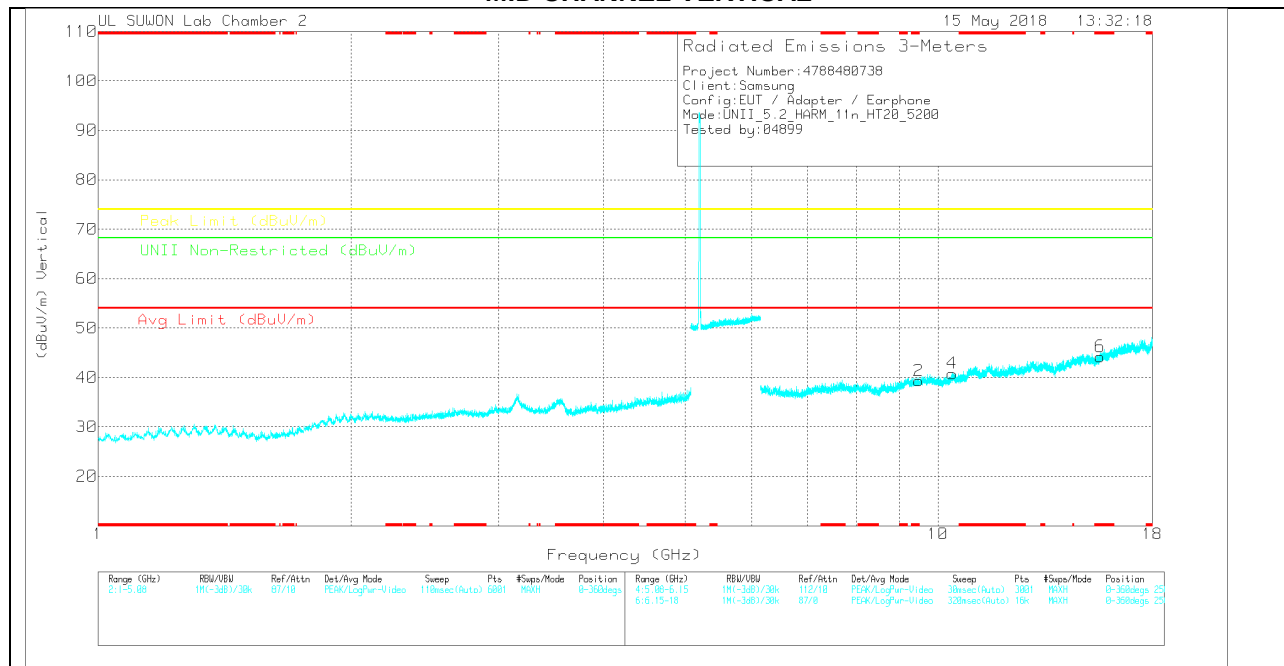

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117(30)1687 24)	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	9.7	20.86	PK	36.8	-17.8	0	39.86	-	-	-	-	68.2	-28.34	0-360	150	H
3	10.4	18.65	PK	37.5	-16.4	0	39.75	-	-	-	-	68.2	-28.45	0-360	150	H
5	* 15.6	19.06	PK	39.8	-14.5	0	44.36	-	-	74	-29.64	-	-	0-360	250	H
2	* 9.488	20.54	PK	36.6	-17.8	0	39.34	-	-	74	-34.66	-	-	0-360	250	V
4	10.4	19.7	PK	37.5	-16.4	0	40.8	-	-	-	-	68.2	-27.4	0-360	250	V
6	* 15.601	18.92	PK	39.8	-14.5	0	44.22	-	-	74	-29.78	-	-	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

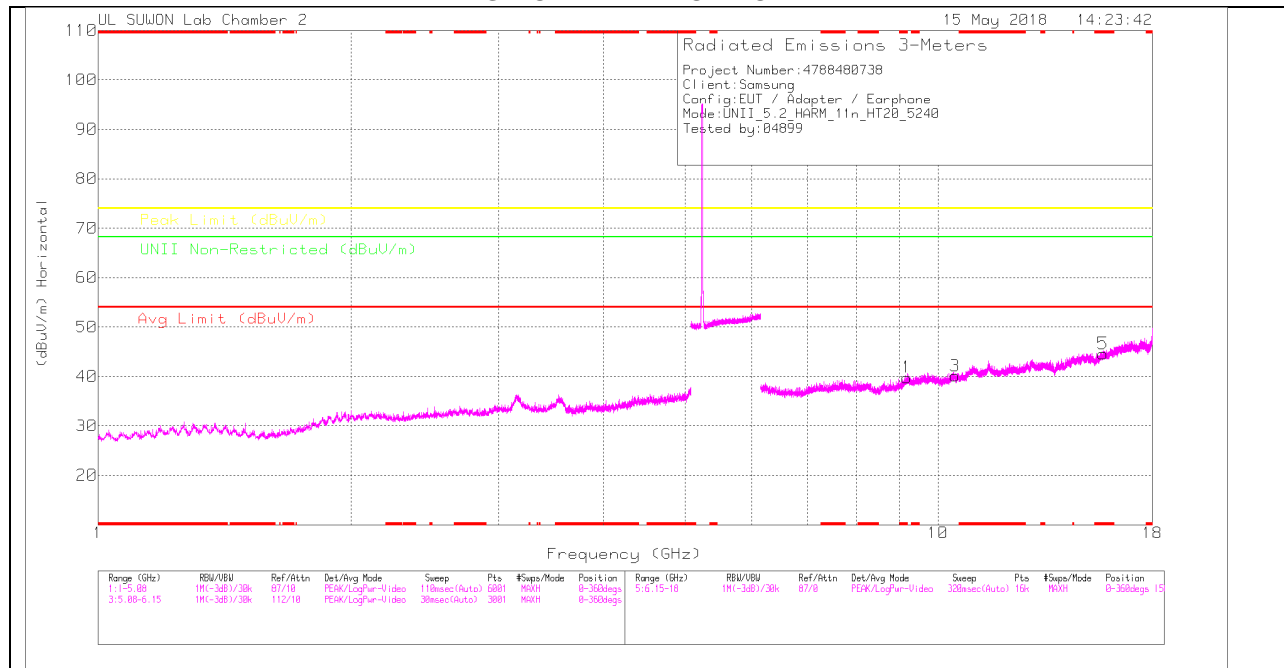

HIGH CHANNEL VERTICAL

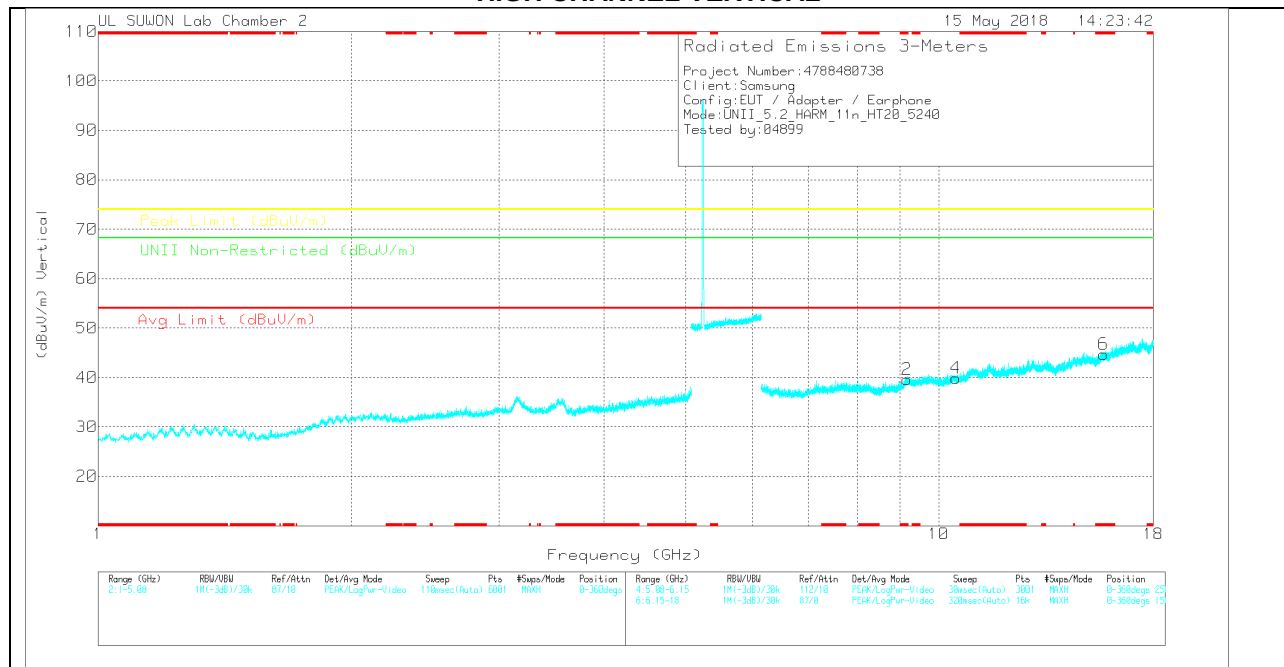

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	170531_1117(001887 24)	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 9.18	20.89	PK	36.4	-17.5	0	39.79	-	-	74	-34.21	-	-	0-360	150	H
3	10.477	18.97	PK	37.5	-16.4	0	40.07	-	-	-	-	68.2	-28.13	0-360	150	H
5	* 15.722	19.49	PK	39.9	-14.8	0	44.59	-	-	74	-29.41	-	-	0-360	250	H
2	* 9.165	20.81	PK	36.4	-17.6	0	39.61	-	-	74	-34.39	-	-	0-360	250	V
4	10.481	18.79	PK	37.5	-16.4	0	39.89	-	-	-	-	68.2	-28.31	0-360	250	V
6	* 15.718	19.73	PK	39.9	-14.9	0	44.73	-	-	74	-29.27	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.1.3. TX Above 1GHz 802.11n HT40 MODE IN THE 5.2GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

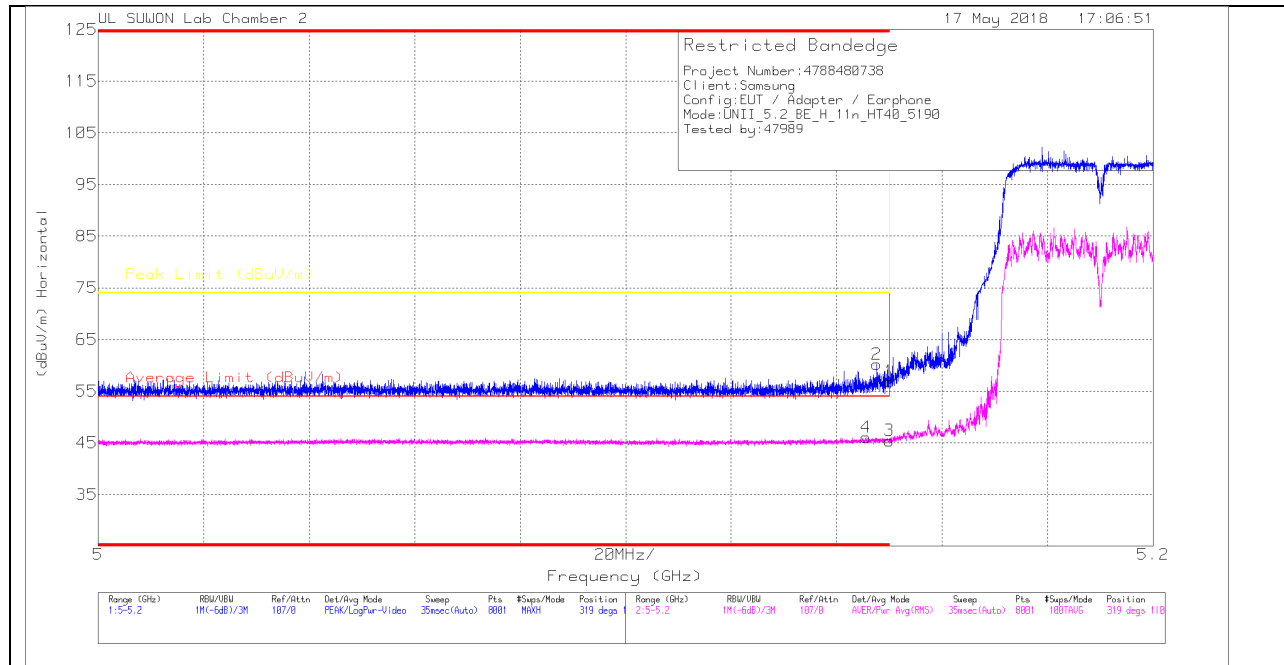

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	1705311_3117(00168724)	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	5.15	38.16	Pk	34	-15.3	0	56.86	-	-	74	-17.14	319	110	H
2	* 5.148	41.53	Pk	34	-15.3	0	60.23	-	-	74	-13.77	319	110	H
3	5.15	26.55	RMS	34	-15.3	.18	45.43	54	-8.57	-	-	319	110	H
4	* 5.146	27.2	RMS	34	-15.3	.18	46.08	54	-7.92	-	-	319	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

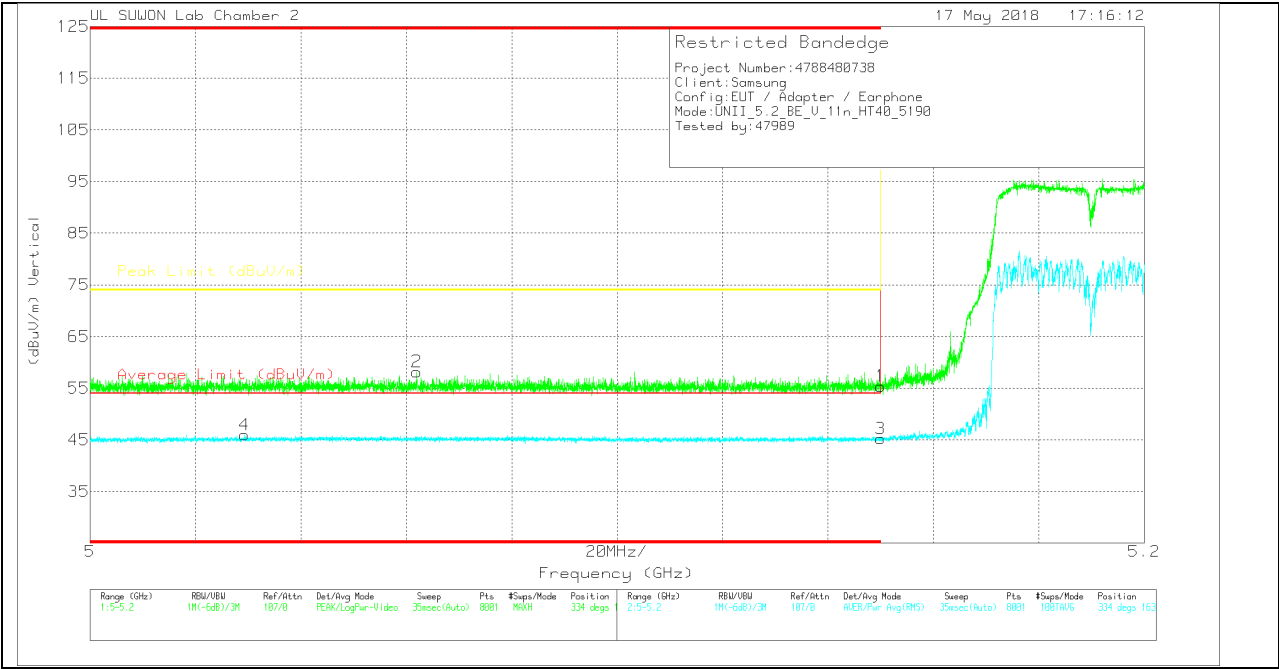

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_311700168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	5.15	36.68	Pk	34	-15.3	0	55.38	-	-	74	-18.62	334	163	V
2	* 5.062	39.48	Pk	33.9	-15.2	0	58.18	-	-	74	-15.82	334	163	V
3	5.15	26.36	RMS	34	-15.3	.18	45.24	54	-8.76	-	-	334	163	V
4	* 5.029	27.11	RMS	33.9	-15.2	.18	45.99	54	-8.01	-	-	334	163	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

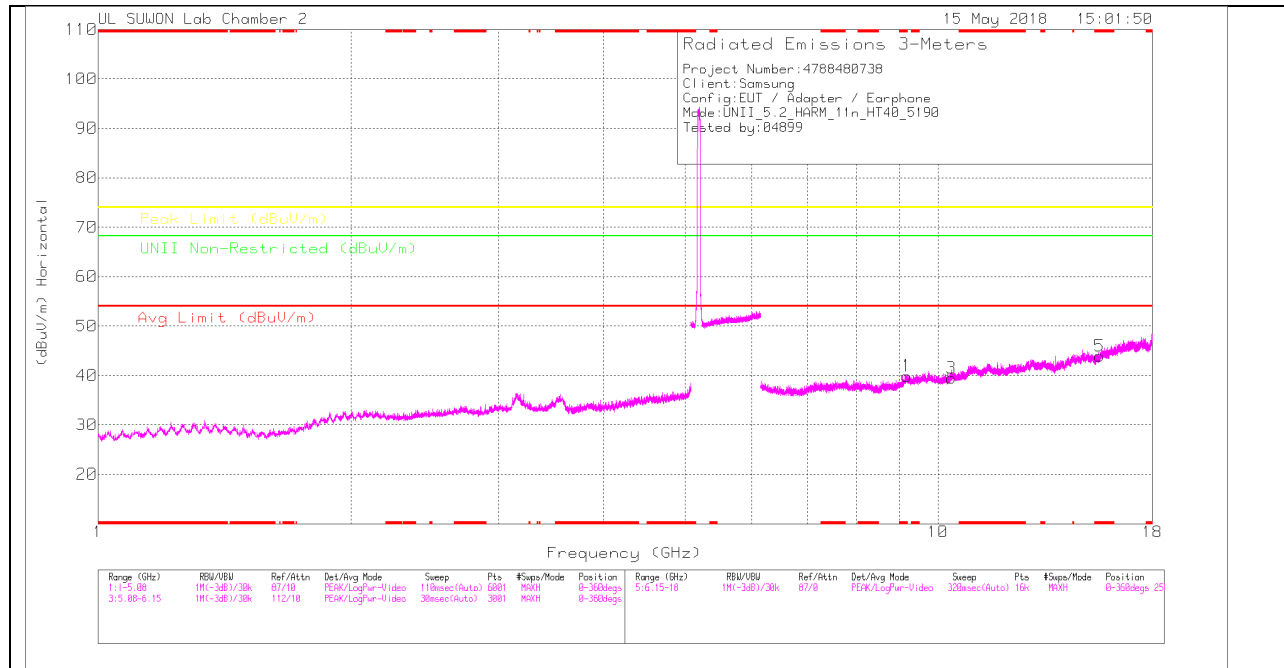

LOW CHANNEL VERTICAL

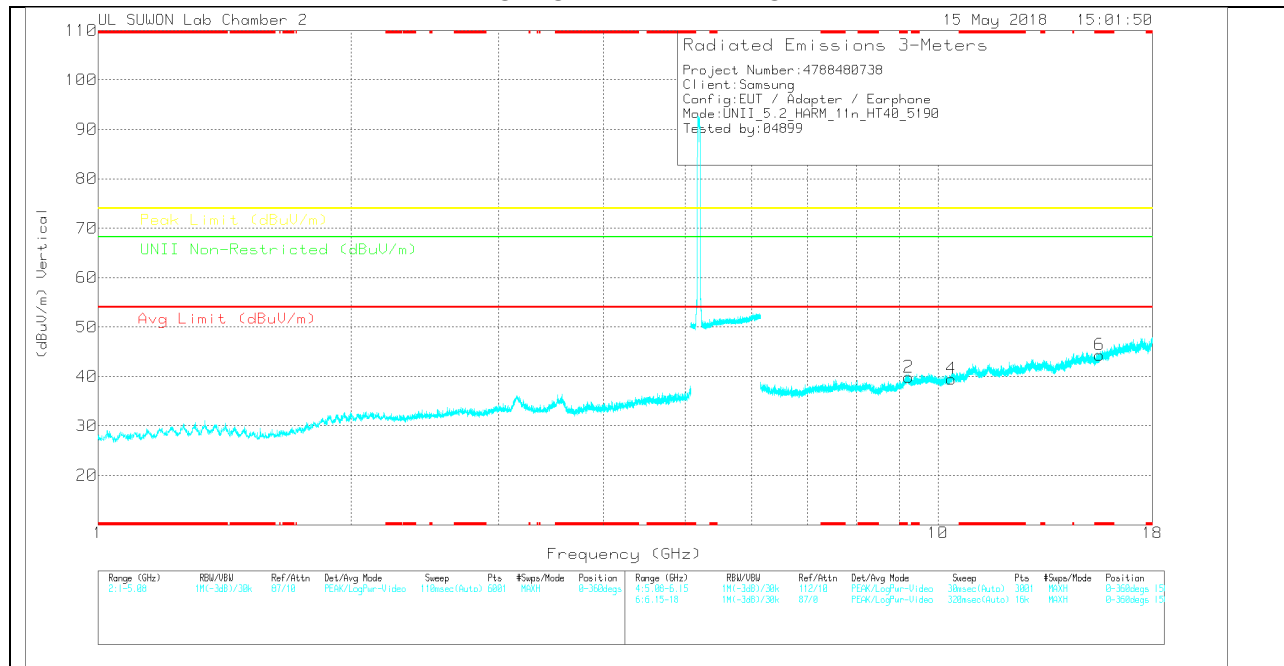

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117003887 24]	60Hz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unid Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 9.18	21	PK	36.4	-17.5	0	39.9	-	-	74	-34.1	-	-	0-360	150	H
3	10.38	18.48	PK	37.5	-16.5	0	39.48	-	-	-	-	68.2	-28.72	0-360	250	H
5	* 15.576	18.63	PK	39.8	-14.5	0	43.93	-	-	74	-30.07	-	-	0-360	150	H
2	9.229	21.07	PK	36.4	-17.6	0	39.87	-	-	-	-	68.2	-28.33	0-360	150	V
4	10.38	18.53	PK	37.5	-16.5	0	39.53	-	-	-	-	68.2	-28.67	0-360	250	V
6	* 15.573	19.17	PK	39.8	-14.6	0	44.37	-	-	74	-29.63	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).