SAR EVALUATION REPORT

IEEE Std 1528-2013

For

GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, ANT+, & NFC

FCC ID: A3LSMA705MN
Model Name: SM-A705MN/DS & SM-A705MN

Report Number: 12726919-S1V3
Issue Date: 4/9/2019

Prepared for

Samsung Electronics Co. Ltd
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

Prepared by

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	3/28/2019	Initial Issue	--
V2	4/3/2019	Updated in accordance with TCB feedback	Christopher Kuwatani
V3	4/9/2019	Section 9.3: Updated Grip Sensor Target Power	Coltyce Sanders

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Table of Contents

1. Attestation of Test Results 5

2. Test Specification, Methods and Procedures 6

3. Facilities and Accreditation 6

4. SAR Measurement System & Test Equipment 7

4.1. SAR Measurement System 7

4.2. SAR Scan Procedures 8

4.3. Test Equipment 10

5. Measurement Uncertainty 11

6. Device Under Test (DUT) Information 11

6.1. DUT Description 11

6.2. Wireless Technologies 12

6.3. General LTE SAR Test and Reporting Considerations 13

6.4. LTE (TDD) Considerations 15

6.5. Power Back-off Operation 16

7. RF Exposure Conditions (Test Configurations) 17

8. Dielectric Property Measurements & System Check 19

8.1. Dielectric Property Measurements 19

8.2. System Check 22

9. Conducted Output Power Measurements 24

9.1. GSM 24

9.2. W-CDMA 26

9.3. LTE 30

9.4. LTE Carrier Aggregation 44

9.5. Wi-Fi 2.4GHz (DTS Band) 48

9.6. Wi-Fi 5GHz (U-NII Bands) 50

9.7. Bluetooth 53

10. Measured and Reported (Scaled) SAR Results 55

10.1. GSM850 57

10.2. GSM1900 57

10.3. W-CDMA Band II 58

10.4. W-CDMA Band IV 58

10.5. W-CDMA Band V 59

10.6. LTE Band 2 (20MHz Bandwidth) 59

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.7. LTE Band 4 (20MHz Bandwidth) ... 60
10.8. LTE Band 5 (10MHz Bandwidth) ... 61
10.9. LTE Band 12 (10MHz Bandwidth) ... 62
10.10. LTE Band 13 (10MHz Bandwidth) ... 63
10.11. LTE Band 41 (20MHz Bandwidth) ... 64
10.12. LTE Band 66 (20MHz Bandwidth) ... 65
10.13. Wi-Fi (DTS Band) ... 66
10.14. Wi-Fi (U-NII Band) ... 66
10.15. Bluetooth ... 68

11. SAR Measurement Variability ... 69

12. Simultaneous Transmission Conditions ... 70
12.1. Simultaneous transmission SAR test exclusion considerations ... 70
12.1.1. Sum of SAR ... 70
12.2. Sum of the SAR for WWAN & Wi-Fi & BT ... 70

Appendixes ... 71
Appendix A: SAR Setup Photos ... 71
Appendix B: SAR System Check Plots ... 71
Appendix C: SAR Highest Test Plots ... 71
Appendix D: SAR Tissue Ingredients ... 71
Appendix E: SAR Probe Certificates ... 71
Appendix F: SAR Dipole Certificates ... 71

This report shall not be reproduced without the written approval of UL Verification Services Inc.

1. Attestation of Test Results

Applicant Name		Samsung Electronics Co. Ltd			
FCC ID		A3LSMA705MN			
Model Name		SM-A705MN/DS & SM-A705MN			
Applicable Standards		Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category		SAR Limits (W/Kg)			
		Peak spatial-average (1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure		1.6		4	
RF Exposure Conditions		Equipment Class - Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
Head		0.327	0.052	0.296	0.013
Body-worn		0.514	0.064	0.701	0.005
Hotspot		0.625	0.171	0.742	0.017
Product specific 10g SAR		N/A	N/A	1.914	N/A
Simultaneous TX	Head	0.623	0.379	0.623	0.340
	Body-worn	1.215	0.578	1.215	0.519
	Hotspot	1.367	0.796	1.367	0.642
Date Tested		3/15/2019 to 3/29/2019			
Test Results		Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.
The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.
This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released By:	Prepared By:
Devin Chang Senior Test Engineer UL Verification Services Inc.	Christopher Kuwatani Laboratory Technician UL Verification Services Inc.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- TCB workshop October 2014; RF Exposure Procedures (Other LTE Considerations)
- TCB workshop October 2015; RF Exposure Procedures (KDB 941225 D05A)
- TCB workshop April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- TCB workshop April 2016; RF Exposure Procedures (LTE Carrier Aggregation for DL)
- TCB workshop October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- TCB workshop October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- TCB workshop May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- TCB workshop April 2018; RF Exposure Procedures (LTE DL CA SAR Test Exclusion)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

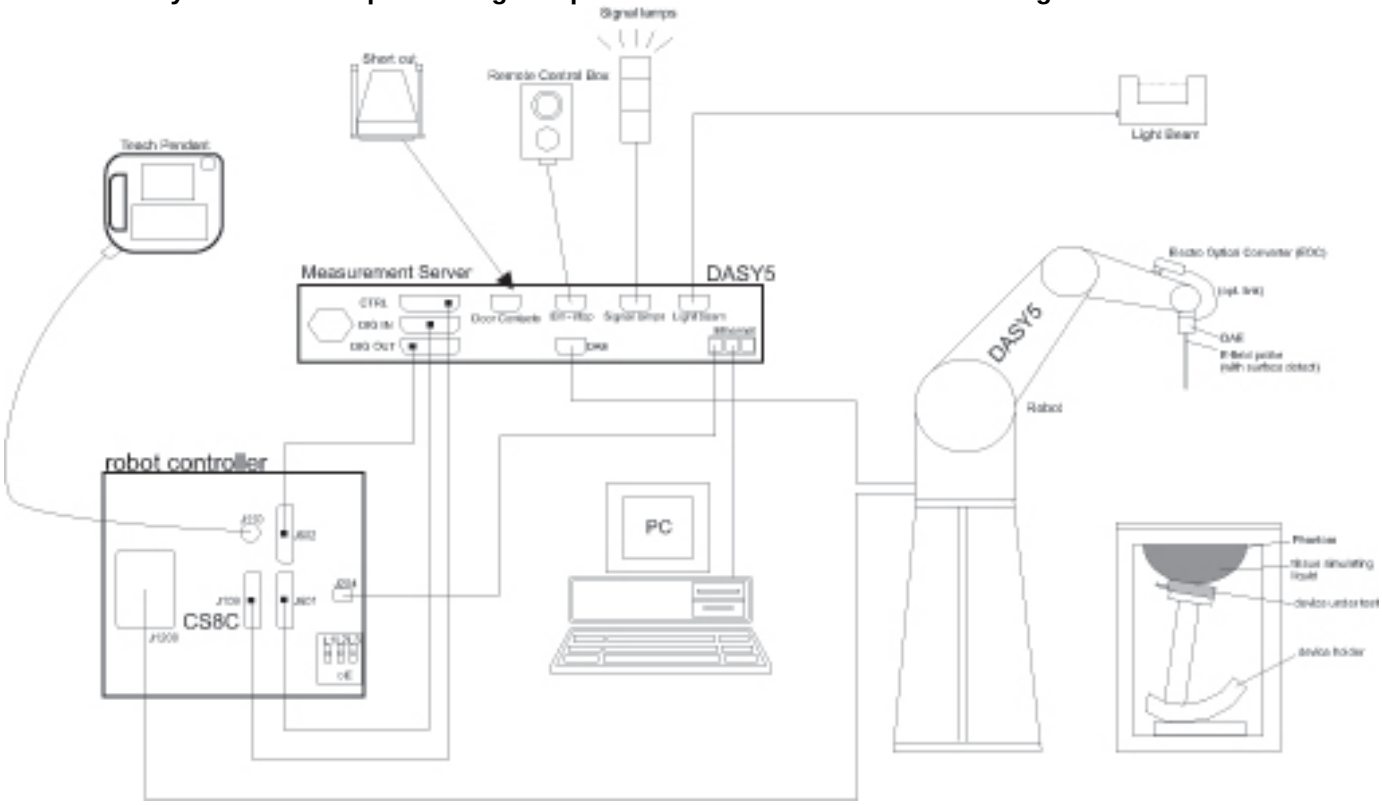

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	R&S	ZNLE6	101273-VA	7/16/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/11/2019
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	9/11/2019
Thermometer	Fisher Scientific	Traceable	140562250	3/5/2020

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Rhode & Schwarz	SMB100A	180970	2/13/2020
Power Sensor	Rhode & Schwarz	NRP18A	100994	2/15/2020
Synthesized Signal Generator	Agilent	N5181A	MY50140610	1/31/2020
Power Meter	Keysight	N1912A	MY50001018	1/30/2020
Power Sensor	Agilent	N1921A	MY53020038	4/23/2019
Power Sensor	Agilent	N1921A	MY52260009	2/5/2020
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2149	N/A
DC Power Supply	Sorensen	XT 15-4	1817A02680	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3990	8/17/2019
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3902	5/24/2019
E-Field Probe (SAR Lab G)	SPEAG	EX3DV4	7463	7/20/2019
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	7482	7/23/2019
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1548	5/3/2019
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1439	7/10/2019
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1257	9/14/2019
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1239	7/11/2019
System Validation Dipole	SPEAG	D750V3	1024	5/16/2019
System Validation Dipole	SPEAG	D835V2	4d142	8/23/2019
System Validation Dipole	SPEAG	D1750V2	1050	4/10/2019
System Validation Dipole	SPEAG	D1900V2	5d140	4/11/2019
System Validation Dipole	SPEAG	D2450V2	706	5/18/2019
System Validation Dipole	SPEAG	D2600V2	1006	10/16/2019
System Validation Dipole	SPEAG	D5GHzV2	1138	8/21/2019

Other

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	T1263	MY55196004	1/30/2020
Power Sensor	Agilent	N1921A	T309	MY52270022	2/6/2020
Base Station Simulator	R & S	CMW500	T959	135384	2/16/2020
Base Station Simulator	R & S	CBT Bluetooth Tester	T438	100987	2/14/2020

This report shall not be reproduced without the written approval of UL Verification Services Inc.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Refer to Appendix A This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm)
Back Cover	The Back Cover is not removable
Battery Options	The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5.8 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other. Wi-Fi Direct is only available in hand use configurations. ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5.2/5.8 GHz)
Bluetooth Tethering (Hotspot)	BT Tethering mode permits the device to share its cellular data connection with other devices. ☒ BT Tethering (Bluetooth 2.4 GHz)
Test sample information	**S/N** / **IMEI** / **Notes** R38M10NPS4J / 356003100003890 / Conducted R38M10NPS7H / 356003100003924 / Conducted R38M10NPS5B / 356003100003908 / Conducted R38M10NPSLM / 356003100004054 / Conducted R38M10NPSMK / 356003100004062 / Conducted R38M10NPL4X / 356003100001910 / Radiated R38M10NPKKK / 356003100001738 / Radiated R38M10NPGKL / 356003100000748 / Radiated R38M10NPSGE / 35600310004013 / Radiated R38M10NPSHW / 356003100004021 / Radiated
Hardware Version	REV0.1
Software Version	A705MN.001

This report shall not be reproduced without the written approval of UL Verification Services Inc.

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	GSM Class : B Multi-Slot Class: Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
	Does this device support SV-DO (1xRTT-1xEVDO)? ☐ Yes ☒ No			
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7) DL only		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41 FDD Band 66	QPSK 16QAM 64AQM Rel. 12 Carrier Aggregation support downlink only		100% (FDD) 63.3% (TDD) Refer to §6.4
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		98.64% (802.11b) [1]
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		97.18% (802.11a/n/ac 20MHz BW) [2] 89.95% (802.11ac 80MHz BW) [2]
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	BR, EDR, LE		77.05%[3]

Notes:

1. Refer to §9.5 for measured Duty Cycle.
2. Refer to §9.6 for measured Duty Cycle.
3. Refer to §9.7 for measured Duty Cycle.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	**18700 /1860**	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	**18900/ 1880**	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	**19100/ 1900**	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)					
		Channel Bandwidth					
		20 MHz [1]	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	**20175/ 1732.5**	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz [1]	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			**20525/ 836.5**	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 – 716 MHz (BW = 17 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz [1]	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			**23095/ 707.5**	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz [1]	5 MHz [1]	3 MHz	1.4 MHz
	Low				23205/ 779.5		
	Mid			**23230/ 782**	23230/ 782		
	High				23255/ 784.5		
	Band 14	Frequency range: 788 - 798 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz [1]	5 MHz [1]	3 MHz	1.4 MHz
	Low				23305/ 790.5		
	Mid			**23330/ 793**	23330/ 793		
	High				23355/ 795.5		
	Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz [1]	5 MHz [1]	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
	Mid			**23790/ 710**	23790/ 710		
	High			23800/	23825/		

This report shall not be reproduced without the written approval of UL Verification Services Inc.

				711	713.5		
	Band 41[2]	Frequency range: 2496 - 2690 MHz (BW = 194MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	**39750 / 2506.0**					
	Low-Mid	**40185 / 2549.5**					
	Mid	**40620 / 2593.0**					
	Mid-High	**41055 / 2636.5**					
	High	**41490 / 2680.0**					
	Band 66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	**132072/ 1720**	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7
	Mid	**132322/ 1745**	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745
	High	**132572/ 1770**	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3

LTE transmitter and antenna implementation	Refer to Appendix A.
Maximum power reduction (MPR)	**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

MPR Built-in by design
The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.
A-MPR (additional MPR) was disabled during SAR testing

Power reduction	Yes for LTE B2/4/41/66
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.

Notes:

1. Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
2. LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
3. SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

This report shall not be reproduced without the written approval of UL Verification Services Inc.

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U / period

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

6.5. Power Back-off Operation

This device supports multiple power back-off modes: WWAN (Hotspot), WWAN (Grip Sensor), and WLAN (RCV+IR Sensor). Each of the power back-off modes operates within specific exposure conditions for certain technologies.

WWAN (Hotspot) and WWAN (Grip Sensor) operate separately. Also, in a situation where both WWAN power back-off modes could be active, WWAN (Grip Sensor) power back-off takes priority. For a detailed description of the grip sensor refer to the WWAN sensor triggering distance data shown in the Operational Description.

WLAN back-off power supports an RCV+IR Sensor. This sensor activates in a held to ear exposure condition. When the sensor activates in this exposure condition, the output power level is reduced. For a detailed description of the RCV+IR sensor refer to the WLAN sensor triggering distance data shown in the Operational Description.

For full details on how each power back-off mode operates, refer to the Operational Description.

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Product Specific 10g
WWAN (Hotspot)	GSM 1900 W-CDMA B2 W-CDMA B4 LTE B2 LTE B4 LTE B66	N/A	N/A	✓	N/A
WWAN (Grip Sensor)	GSM 1900 W-CDMA B2 W-CDMA B4 LTE B4 LTE B41 LTE B66	N/A	N/A	N/A	✓
WLAN	Wi-Fi 2.4GHz Wi-Fi 5GHz	✓	N/A	N/A	N/A

Note(s):
Tune-Up Limits for WWAN (Hotspot) and WWAN (Grip Sensor) are both Reduced Average Powers. Please refer to §9 for all power measurements.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Main Ant. 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specifc 10g	0 mm	Rear	Refer to notes 2 & 3		
			Front			
			Edge 1 (Top)			
			Edge 2 (Right)			
			Edge 3 (Bottom)			
			Edge 4 (Left)			
WWAN (Main Ant. 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specifc 10g	0 mm	Rear	Refer to notes 2 & 3		
			Front			
			Edge 1 (Top)			
			Edge 2 (Right)			
			Edge 3 (Bottom)			
			Edge 4 (Left)			

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
2. For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
3. For Phablet devices: when hotspot mode applies and power reduction applies to hotspot mode, Product Specific 10-g SAR is required for each test position that has an adjusted SAR to maximum power that is > 1.2 W/kg.
4. WWAN Main Antenna #2 supports LTE B41.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1
	Product Specifc 10g	0 mm	Rear	Refer to notes 2 & 3		
			Front			
			Edge 1 (Top)			
			Edge 2 (Right)			
			Edge 3 (Bottom)			
			Edge 4 (Left)			

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
2. For Phablet devices: when Hotspot Mode is not supported, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
3. For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
4. Wi-Fi Direct is only available in Hand use configuration.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (εr) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within ± 5% of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for εr and σ may be relaxed to ± 10%. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ε_r	σ (S/m)	ε_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (εr)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
E	3/18/2019	5250	Head	5250	34.70	35.93	-3.43	4.56	4.70	-3.04
				5150	34.89	36.05	-3.21	4.45	4.60	-3.21
				5350	34.49	35.82	-3.71	4.67	4.80	-2.76
E	3/18/2019	5600	Head	5600	34.09	35.53	-4.06	4.92	5.06	-2.77
				5500	34.27	35.65	-3.87	4.81	4.96	-3.08
				5725	33.81	35.39	-4.47	5.07	5.19	-2.22
E	3/18/2019	5750	Head	5750	33.78	35.36	-4.48	5.11	5.21	-2.01
				5700	33.89	35.42	-4.32	5.04	5.16	-2.41
				5850	33.63	35.30	-4.73	5.21	5.27	-1.20
E	3/18/2019	5250	Body	5250	48.05	48.95	-1.84	5.25	5.35	-1.89
				5150	48.24	49.09	-1.73	5.12	5.24	-2.28
				5350	47.86	48.82	-1.96	5.39	5.47	-1.40
E	3/18/2019	5600	Body	5600	47.43	48.48	-2.16	5.72	5.76	-0.69
				5500	47.62	48.61	-2.04	5.57	5.64	-1.27
				5725	47.17	48.31	-2.36	5.91	5.91	0.11
E	3/18/2019	5750	Body	5750	47.14	48.27	-2.35	5.95	5.94	0.31
				5700	47.23	48.34	-2.30	5.87	5.88	-0.10
				5850	46.98	48.20	-2.53	6.09	6.00	1.50
F	3/18/2019	835	Head	835	41.84	41.50	0.82	0.90	0.90	0.04
				805	41.87	41.68	0.46	0.89	0.90	-1.02
				850	41.81	41.50	0.75	0.91	0.92	-0.91
F	3/18/2019	835	Body	835	54.12	55.20	-1.96	1.00	0.97	3.30
				805	54.12	55.33	-2.20	0.99	0.97	2.22
				850	54.09	55.16	-1.93	1.01	0.99	2.21
F	3/20/2019	750	Head	750	39.93	41.96	-4.84	0.89	0.89	-0.56
				660	40.44	42.42	-4.67	0.86	0.89	-3.43
				800	39.89	41.71	-4.35	0.91	0.90	1.12
F	3/20/2019	750	Body	750	53.75	55.55	-3.23	0.96	0.96	-0.27
				660	54.13	55.89	-3.15	0.93	0.96	-3.11
				800	53.66	55.35	-3.06	0.98	0.97	1.40
F	3/25/2019	1750	Head	1750	39.42	40.08	-1.66	1.32	1.37	-3.87
				1710	39.50	40.15	-1.61	1.29	1.35	-3.89
				1755	39.41	40.08	-1.66	1.32	1.37	-3.92
F	3/25/2019	1750	Body	1750	52.23	53.44	-2.27	1.47	1.49	-1.15
				1710	52.30	53.54	-2.32	1.44	1.46	-1.34
				1755	52.21	53.43	-2.28	1.47	1.49	-1.16
G	3/19/2019	2450	Head	2450	38.25	39.20	-2.42	1.73	1.80	-4.11
				2400	38.30	39.30	-2.54	1.69	1.75	-3.52
				2480	38.25	39.16	-2.33	1.74	1.83	-4.83
G	3/19/2019	2450	Body	2450	50.09	52.70	-4.95	1.97	1.95	0.92
				2400	50.14	52.77	-4.99	1.92	1.90	1.32
				2480	50.08	52.66	-4.90	1.99	1.99	-0.06

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Dielectric Property Measurements Results (continued):

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (εr)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
G	3/21/2019	2600	Head	2600	38.09	39.01	-2.36	1.90	1.96	-2.96
				2495	38.20	39.14	-2.41	1.82	1.85	-1.82
				2690	37.93	38.90	-2.49	1.98	2.06	-4.05
G	3/21/2019	2600	Body	2600	50.48	52.51	-3.87	2.15	2.16	-0.55
				2495	50.60	52.64	-3.88	2.05	2.01	1.68
				2690	50.32	52.40	-3.96	2.24	2.29	-2.20
H	3/15/2019	1900	Head	1900	38.27	40.00	-4.32	1.45	1.40	3.79
				1850	38.34	40.00	-4.15	1.42	1.40	1.57
				1920	38.27	40.00	-4.32	1.47	1.40	4.86
H	3/15/2019	1900	Body	1900	55.70	53.30	4.50	1.54	1.52	1.12
				1850	55.67	53.30	4.45	1.58	1.52	3.68
				1920	55.65	53.30	4.41	1.59	1.52	4.74
H	3/18/2019	1900	Head	1900	38.07	40.00	-4.83	1.38	1.40	-1.50
				1850	38.12	40.00	-4.70	1.35	1.40	-3.36
				1920	38.06	40.00	-4.85	1.39	1.40	-0.50
H	3/18/2019	1900	Body	1900	52.94	53.30	-0.68	1.58	1.52	3.82
				1850	53.05	53.30	-0.47	1.55	1.52	1.78
				1920	52.92	53.30	-0.71	1.59	1.52	4.80
H	3/20/2019	1750	Head	1750	38.93	40.08	-2.88	1.36	1.37	-0.73
				1710	39.04	40.15	-2.76	1.33	1.35	-0.92
				1755	38.90	40.08	-2.94	1.36	1.37	-0.79
H	3/20/2019	1750	Body	1750	50.80	53.44	-4.94	1.51	1.49	1.81
				1710	50.91	53.54	-4.92	1.48	1.46	1.40
				1755	50.78	53.43	-4.96	1.52	1.49	1.86

This report shall not be reproduced without the written approval of UL Verification Services Inc.

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
  For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
  For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within ±10% of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
E	3/18/2019	Head	D5GHzV2 SN:1138 (5.25 GHz)	8/21/2019	8.260	82.60	82.60	0.00	2.390	23.90	23.80	0.42	
E	3/18/2019	Head	D5GHzV2 SN:1138 (5.6 GHz)	8/21/2019	9.000	90.00	86.00	4.65	2.560	25.60	24.60	4.07	
E	3/18/2019	Head	D5GHzV2 SN:1138 (5.75 GHz)	8/21/2019	7.460	74.60	82.40	**-9.47**	2.150	21.50	23.60	-8.90	1,2
E	3/18/2019	Body	D5GHzV2 SN:1138 (5.25 GHz)	8/21/2019	7.140	71.40	76.60	**-6.79**	2.020	20.20	21.40	-5.61	3,4
E	3/18/2019	Body	D5GHzV2 SN:1138 (5.6 GHz)	8/21/2019	8.380	83.80	79.50	**5.41**	2.360	23.60	22.20	6.31	5,6
E	3/18/2019	Body	D5GHzV2 SN:1138 (5.75 GHz)	8/21/2019	7.630	76.30	74.10	2.97	2.140	21.40	20.60	3.88	
F	3/18/2019	Head	D835V2 SN:4d142	8/23/2019	0.935	9.35	9.48	-1.37	0.612	6.12	6.10	0.33	
F	3/18/2019	Body	D835V2 SN:4d142	8/23/2019	0.931	9.31	9.68	**-3.82**	0.609	6.09	6.36	-4.25	7,8
F	3/20/2019	Head	D750V3 SN:1024	5/16/2019	0.834	8.34	8.28	0.72	0.551	5.51	5.41	1.85	
F	3/20/2019	Body	D750V3 SN:1024	5/16/2019	0.853	8.53	9.03	**-5.54**	0.565	5.65	6.05	-6.61	9,10
F	3/25/2019	Head	D1750V2 SN:1050	4/10/2019	3.480	34.80	36.50	-4.66	1.850	18.50	19.42	-4.74	
F	3/25/2019	Body	D1750V2 SN:1050	4/10/2019	3.500	35.00	37.18	**-5.86**	1.860	18.60	19.74	-5.78	11,12
G	3/19/2019	Body	D2450V2 SN:706	5/18/2019	4.870	48.70	50.60	-3.75	2.270	22.70	23.70	-4.22	
G	3/19/2019	Head	D2450V2 SN:706	5/18/2019	4.950	49.50	52.60	**-5.89**	2.300	23.00	24.60	-6.50	13,14
G	3/21/2019	Head	D2600V2 SN:1006	10/16/2019	5.360	53.60	59.31	**-9.63**	2.410	24.10	26.43	-8.82	15,16
G	3/21/2019	Body	D2600V2 SN:1006	10/16/2019	5.650	56.50	58.52	-3.45	2.510	25.10	26.15	-4.02	
H	3/15/2019	Head	D1900V2 SN:5d140	4/11/2019	3.990	39.90	38.93	2.49	2.050	20.50	20.14	1.79	
H	3/15/2019	Body	D1900V2 SN:5d140	4/11/2019	4.030	40.30	41.00	-1.71	2.090	20.90	21.05	-0.71	
H	3/18/2019	Head	D1900V2 SN:5d140	4/11/2019	4.110	41.10	38.93	5.57	2.100	21.00	20.14	4.27	
H	3/18/2019	Body	D1900V2 SN:5d140	4/11/2019	4.420	44.20	41.00	**7.80**	2.300	23.00	21.05	9.26	17,18
H	3/20/2019	Head	D1750V2 SN:1050	4/10/2019	3.960	39.60	36.50	**8.49**	2.100	21.00	19.42	8.14	19,20
H	3/20/2019	Body	D1750V2 SN:1050	4/10/2019	4.010	40.10	37.18	7.85	2.120	21.20	19.74	7.40	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Maximum Output Power (Tune-up Limit) for GSM

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2W/kg.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.8	23.8	34.0	25.0
			190	836.6	32.8	23.8		
			251	848.8	32.6	23.6		
		2	128	824.2	29.1	23.1	31.0	25.0
			190	836.6	29.5	23.5		
			251	848.8	29.4	23.3		
		3	128	824.2	27.0	22.8	29.0	24.7
			190	836.6	27.3	23.0		
			251	848.8	27.1	22.8		
		4	128	824.2	26.0	23.0	28.0	**25.0**
			190	836.6	26.1	23.1		
			251	848.8	26.1	23.1		
EDGE (8PSK)	MCS5	1	128	824.2	25.6	16.6	27.5	18.5
			190	836.6	25.8	16.7		
			251	848.8	25.5	16.5		
		2	128	824.2	23.3	17.3	25.0	19.0
			190	836.6	23.4	17.4		
			251	848.8	23.2	17.2		
		3	128	824.2	22.1	17.8	23.5	19.2
			190	836.6	22.1	17.8		
			251	848.8	21.8	17.5		
		4	128	824.2	20.4	17.3	22.0	19.0
			190	836.6	20.7	17.6		
			251	848.8	20.5	17.5		

Notes:

GPRS/EDGE (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				Hotspot Mode Power (dBm)				Grip Sensor Power (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	29.0	20.0	31.0	22.0	26.5	17.5	29.0	20.0	26.1	17.1	28.0	19.0
			661	1880.0	29.5	20.5			26.5	17.5			26.5	17.5		
			810	1909.8	29.6	20.5			26.5	17.5			26.3	17.3		
		2	512	1850.2	27.3	21.3	28.5	22.5	25.2	19.2	26.5	20.5	24.2	18.2	25.5	19.5
			661	1880.0	27.6	21.6			25.5	19.5			24.5	18.5		
			810	1909.8	27.5	21.5			25.5	19.5			24.4	18.4		
		3	512	1850.2	25.1	20.8	26.5	22.2	23.0	18.7	24.5	20.2	22.1	17.9	23.5	19.2
			661	1880.0	25.5	21.2			23.4	19.1			22.4	18.1		
			810	1909.8	25.5	21.2			23.4	19.1			22.4	18.1		
		4	512	1850.2	24.4	21.4	25.5	**22.5**	22.5	19.5	23.5	**20.5**	21.5	18.5	22.5	**19.5**
			661	1880.0	24.8	21.8			22.8	19.8			21.8	18.8		
			810	1909.8	24.8	21.8			22.8	19.7			21.8	18.8		
EDGE (8PSK)	MCS5	1	512	1850.2	24.7	15.6	26.0	17.0	22.6	13.6	24.0	15.0	21.7	12.7	23.0	14.0
			661	1880.0	25.0	16.0			23.0	14.0			22.0	13.0		
			810	1909.8	24.9	15.9			23.0	14.0			22.1	13.0		
		2	512	1850.2	22.5	16.5	24.0	18.0	20.5	14.5	22.0	16.0	19.6	13.6	21.0	15.0
			661	1880.0	22.9	16.8			20.9	14.8			20.0	13.9		
			810	1909.8	23.0	16.9			20.9	14.9			20.0	14.0		
		3	512	1850.2	21.9	17.6	23.0	18.7	20.3	16.1	21.0	16.7	19.0	14.8	20.5	16.2
			661	1880.0	22.3	18.0			20.3	16.0			19.4	15.1		
			810	1909.8	22.3	18.1			20.4	16.1			19.5	15.2		
		4	512	1850.2	20.2	17.2	21.0	18.0	18.2	15.1	19.0	16.0	17.3	14.3	18.5	15.5
			661	1880.0	20.6	17.5			18.6	15.5			17.7	14.7		
			810	1909.8	20.7	17.7			18.7	15.7			17.8	14.8		

Notes:

GPRS/EDGE (GMSK) mode with 4 time slots for Max power, 4 time slots for Hotspot Reduced Power, and 4 time slots for Grip Sensor Reduced power, based on the Tune-up Procedure.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9.2. W-CDMA

Per KDB 941225 D01 3G SAR Procedures for W-CDMA:

Maximum output power is verified on the high, middle and low channels and using the appropriate 12.2 kbps RMC with TPC (transmit power control) set to all "1's"

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1. A summary of these settings is illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	βc/βd	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to procedures in table C.10.1.4 of 3GPP TS 34.121-1
A summary of these settings is illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and Δ_{NACK} = 30/15 with β_{hs} = 30/15 * β_c, and Δ_{CQI} = 24/15 with β_{hs} = 24/15 * β_c.

Note 3: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 11/15 and β_d = 15/15.

HSUPA Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}1$: 47/15 $\beta_{ed}2$: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c. For sub-test 5, Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 5/15 with β_{hs} = 5/15 * β_c.

Note 2: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 10/15 and β_d = 15/15.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

HSPA+

DUT supports HSPA+ DL only. Therefore, conducted power measurements is not required.

SAR measurement is not required for the HSDPA, HSUPA and HSPA+. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is ≤ ¼ dB higher than the primary mode

This report shall not be reproduced without the written approval of UL Verification Services Inc.

W-CDMA Band II Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Hotspot Mode (dBm)			Grip Sensor Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.8	N/A	24.5	22.2	N/A	22.5	21.1	N/A	21.5
		9400	1880.0	24.0			22.4			21.5		
		9538	1907.6	23.5			22.4			21.0		
HSDPA	Subtest 1	9262	1852.4	22.2	0.0	23.5	20.7	0.0	21.5	19.7	0.0	20.5
		9400	1880.0	22.4			20.9			20.0		
		9538	1907.6	22.0			20.5			19.5		
	Subtest 2	9262	1852.4	22.2	0.0	23.5	20.6	0.0	21.5	19.6	0.0	20.5
		9400	1880.0	22.4			20.9			20.0		
		9538	1907.6	22.0			20.5			19.5		
	Subtest 3	9262	1852.4	21.0	0.5	23.0	19.5	0.5	21.0	18.5	0.5	20.0
		9400	1880.0	21.4			20.0			18.9		
		9538	1907.6	21.0			19.5			18.5		
	Subtest 4	9262	1852.4	21.0	0.5	23.0	19.5	0.5	21.0	18.5	0.5	20.0
		9400	1880.0	21.4			20.0			18.9		
		9538	1907.6	21.0			19.5			18.5		
HSUPA	Subtest 1	9262	1852.4	22.2	0.0	23.5	19.7	0.0	21.5	20.5	0.0	20.5
		9400	1880.0	22.5			20.0			20.5		
		9538	1907.6	22.0			19.5			20.5		
	Subtest 2	9262	1852.4	20.2	2.0	21.5	18.6	2.0	19.5	18.5	2.0	18.5
		9400	1880.0	20.2			18.9			18.5		
		9538	1907.6	20.0			18.4			18.5		
	Subtest 3	9262	1852.4	21.2	1.0	22.5	19.7	1.0	20.5	19.5	1.0	19.5
		9400	1880.0	21.4			19.9			19.5		
		9538	1907.6	20.9			19.3			19.5		
	Subtest 4	9262	1852.4	20.2	2.0	21.5	18.6	2.0	19.5	18.5	2.0	18.5
		9400	1880.0	20.2			18.9			18.5		
		9538	1907.6	20.0			18.4			18.5		
	Subtest 5	9262	1852.4	22.2	0.0	23.5	19.7	0.0	21.5	20.5	0.0	20.5
		9400	1880.0	22.5			20.0			20.5		
		9538	1907.6	22.0			19.5			20.5		
DC-HSDPA	Subtest 1	9262	1852.4	22.0	0.0	23.5	20.5	0.0	21.5	19.4	0.0	20.5
		9400	1880.0	22.2			20.7			19.9		
		9538	1907.6	21.8			20.3			19.2		
	Subtest 2	9262	1852.4	22.0	0.0	23.5	20.5	0.0	21.5	19.4	0.0	20.5
		9400	1880.0	22.2			20.7			19.9		
		9538	1907.6	21.8			20.3			19.2		
	Subtest 3	9262	1852.4	21.4	0.5	23.0	20.0	0.5	21.0	19.0	0.5	20.0
		9400	1880.0	21.7			20.2			19.1		
		9538	1907.6	21.3			19.8			18.8		
	Subtest 4	9262	1852.4	21.4	0.5	23.0	20.0	0.5	21.0	19.0	0.5	20.0
		9400	1880.0	21.7			20.2			19.1		
		9538	1907.6	21.2			19.8			18.8		

This report shall not be reproduced without the written approval of UL Verification Services Inc.

W-CDMA Band IV Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Hotspot Mode Power (dBm)			Grip Sensor Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	24.2	N/A	24.5	21.8	N/A	22.5	20.7	N/A	21.5
		1413	1732.6	24.4			22.0			21.0		
		1513	1752.6	24.3			21.9			20.9		
HSDPA	Subtest 1	1312	1712.4	22.2	0.0	23.5	20.1	0.0	21.5	19.4	0.0	20.5
		1413	1732.6	22.3			20.2			19.5		
		1513	1752.6	22.3			20.1			19.4		
	Subtest 2	1312	1712.4	21.7	0.0	23.5	19.7	0.0	21.5	18.9	0.0	20.5
		1413	1732.6	21.8			19.8			19.0		
		1513	1752.6	21.7			19.6			18.8		
	Subtest 3	1312	1712.4	21.0	0.5	23.0	18.9	0.5	21.0	18.2	0.5	20.0
		1413	1732.6	21.1			19.0			18.4		
		1513	1752.6	21.0			19.0			18.3		
	Subtest 4	1312	1712.4	21.0	0.5	23.0	18.8	0.5	21.0	18.2	0.5	20.0
		1413	1732.6	21.2			19.3			18.1		
		1513	1752.6	21.0			18.7			18.1		
HSUPA	Subtest 1	1312	1712.4	22.5	0.0	23.5	20.1	0.0	21.5	19.5	0.0	20.5
		1413	1732.6	22.7			20.3			19.5		
		1513	1752.6	22.7			20.2			19.6		
	Subtest 2	1312	1712.4	20.5	2.0	21.5	18.1	2.0	19.5	17.3	2.0	18.5
		1413	1732.6	20.8			18.3			17.6		
		1513	1752.6	20.7			18.2			17.5		
	Subtest 3	1312	1712.4	21.6	1.0	22.5	19.0	1.0	20.5	18.3	1.0	19.5
		1413	1732.6	21.8			19.3			18.6		
		1513	1752.6	21.8			19.2			18.5		
	Subtest 4	1312	1712.4	20.6	2.0	21.5	18.0	2.0	19.5	17.3	2.0	18.5
		1413	1732.6	20.8			18.2			17.6		
		1513	1752.6	20.8			18.2			17.5		
	Subtest 5	1312	1712.4	22.6	0.0	23.5	20.0	0.0	21.5	19.3	0.0	20.5
		1413	1732.6	22.7			20.2			19.6		
		1513	1752.6	22.6			20.1			19.5		
DC-HSDPA	Subtest 1	1312	1712.4	22.0	0.0	23.5	20.0	0.0	21.5	19.0	0.0	20.5
		1413	1732.6	22.2			20.1			19.2		
		1513	1752.6	22.0			20.0			19.0		
	Subtest 2	1312	1712.4	22.0	0.0	23.5	20.0	0.0	21.5	19.0	0.0	20.5
		1413	1732.6	22.2			20.1			19.2		
		1513	1752.6	22.0			20.0			19.0		
	Subtest 3	1312	1712.4	21.4	0.5	23.0	19.6	0.5	21.0	18.5	0.5	20.0
		1413	1732.6	21.8			19.8			18.8		
		1513	1752.6	21.6			19.6			18.5		
	Subtest 4	1312	1712.4	21.4	0.5	23.0	19.6	0.5	21.0	18.5	0.5	20.0
		1413	1732.6	21.8			19.8			18.8		
		1513	1752.6	21.6			19.6			18.5		

This report shall not be reproduced without the written approval of UL Verification Services Inc.

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.0	N/A	25.0
		4183	836.6	24.0		
		4233	846.6	24.1		
HSDPA	Subtest 1	4132	826.4	23.9	0.0	24.0
		4183	836.6	24.0		
		4233	846.6	23.9		
	Subtest 2	4132	826.4	23.9	0.0	24.0
		4183	836.6	24.0		
		4233	846.6	23.9		
	Subtest 3	4132	826.4	23.5	0.5	23.5
		4183	836.6	23.5		
		4233	846.6	23.5		
	Subtest 4	4132	826.4	23.5	0.5	23.5
		4183	836.6	23.5		
		4233	846.6	23.5		
HSUPA	Subtest 1	4132	826.4	22.9	0.0	24.0
		4183	836.6	22.9		
		4233	846.6	22.8		
	Subtest 2	4132	826.4	21.0	2.0	22.0
		4183	836.6	21.0		
		4233	846.6	20.8		
	Subtest 3	4132	826.4	21.9	1.0	23.0
		4183	836.6	21.9		
		4233	846.6	21.9		
	Subtest 4	4132	826.4	21.0	2.0	22.0
		4183	836.6	20.9		
		4233	846.6	20.9		
	Subtest 5	4132	826.4	22.5	0.0	24.0
		4183	836.6	22.5		
		4233	846.6	22.5		
DC-HSDPA	Subtest 1	4132	826.4	22.8	0.0	24.0
		4183	836.6	22.8		
		4233	846.6	22.8		
	Subtest 2	4132	826.4	22.8	0.0	24.0
		4183	836.6	22.8		
		4233	846.6	22.7		
	Subtest 3	4132	826.4	23.4	0.5	23.5
		4183	836.6	23.4		
		4233	846.6	23.4		
	Subtest 4	4132	826.4	23.4	0.5	23.5
		4183	836.6	23.4		
		4233	846.6	23.4		

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of “NS_01”.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

a) The maximum output power, including tolerance, for the smaller band must be ≤ the larger band to qualify for the SAR test exclusion.
b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
   - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is ≤ ½ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

Please refer to section 6.3. for LTE detail test channels.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 2 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				18700	18900	19100	MPR	Tune-up Limit	18700	18900	19100	MPR	Tune-up Limit	18700	18900	19100	MPR	Tune-up Limit
				1860 MHz	1880 MHz	1900 MHz			1860 MHz	1880 MHz	1900 MHz			1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	23.3	23.5	23.2	0.0	24.5	21.8	22.0	21.6	0.0	22.5	20.6	20.7	20.5	0.0	21.5
		1	49	23.3	23.5	23.1	0.0	24.5	21.8	22.0	21.5	0.0	22.5	20.7	20.8	20.4	0.0	21.5
		1	99	23.4	23.4	22.9	0.0	24.5	21.8	21.8	21.4	0.0	22.5	20.6	20.6	20.2	0.0	21.5
		50	0	22.4	22.5	22.2	1.0	23.5	21.9	22.0	21.7	0.0	22.5	20.7	20.8	20.5	0.0	21.5
		50	24	22.4	22.5	22.3	1.0	23.5	21.9	22.0	21.7	0.0	22.5	20.7	20.8	20.6	0.0	21.5
		50	50	22.4	22.5	22.2	1.0	23.5	21.9	22.0	21.6	0.0	22.5	20.8	20.8	20.4	0.0	21.5
		100	0	22.3	22.5	22.2	1.0	23.5	21.8	22.0	21.7	0.0	22.5	20.6	20.8	20.5	0.0	21.5
	16QAM	1	0	22.7	23.0	22.6	1.0	23.5	22.1	22.5	22.1	0.0	22.5	21.1	21.4	21.0	0.0	21.5
		1	49	22.7	23.0	22.5	1.0	23.5	22.2	22.5	22.0	0.0	22.5	21.1	21.4	20.9	0.0	21.5
		1	99	22.7	22.9	22.4	1.0	23.5	22.2	22.4	21.9	0.0	22.5	21.1	21.3	20.8	0.0	21.5
		50	0	21.4	21.6	21.3	2.0	22.5	21.4	21.6	21.2	0.0	22.5	20.8	21.0	20.7	0.0	21.5
		50	24	21.5	21.7	21.3	2.0	22.5	21.4	21.6	21.3	0.0	22.5	20.8	21.0	20.6	0.0	21.5
		50	50	21.5	21.6	21.2	2.0	22.5	21.4	21.6	21.2	0.0	22.5	20.8	21.0	20.5	0.0	21.5
		100	0	21.4	21.7	21.3	2.0	22.5	21.4	21.6	21.3	0.0	22.5	20.7	20.9	20.6	0.0	21.5
	64QAM	1	0	21.9	21.7	21.5	2.0	22.5	21.9	21.6	21.4	0.0	22.5	20.0	20.5	20.8	0.0	21.5
		1	49	21.9	21.7	21.4	2.0	22.5	21.9	21.6	21.3	0.0	22.5	20.0	20.5	20.7	0.0	21.5
		1	99	22.0	21.6	21.3	2.0	22.5	21.9	21.5	21.2	0.0	22.5	20.1	20.4	20.5	0.0	21.5
		50	0	20.4	20.6	20.3	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.3	20.5	20.1	0.0	21.5
		50	24	20.4	20.7	20.3	3.0	21.5	20.5	20.6	20.5	0.0	22.5	20.3	20.5	20.2	0.0	21.5
		50	50	20.4	20.6	20.2	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.3	20.4	20.1	0.0	21.5
		100	0	20.4	20.6	20.3	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.3	20.4	20.1	0.0	21.5

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				18675.0	18900.0	19125.0	MPR	Tune-up Limit	18675.0	18900.0	19125.0	MPR	Tune-up Limit	18675.0	18900.0	19125.0	MPR	Tune-up Limit
				1857.5 MHz	1880 MHz	1902.5 MHz			1857.5 MHz	1880 MHz	1902.5 MHz			1857.5 MHz	1880 MHz	1902.5 MHz		
15 MHz	QPSK	1	0	23.3	23.4	23.2	0.0	24.5	21.9	22.0	21.6	0.0	22.5	20.7	20.7	20.5	0.0	21.5
		1	37	23.4	23.6	23.2	0.0	24.5	21.9	22.0	21.6	0.0	22.5	20.7	20.8	20.4	0.0	21.5
		1	74	23.3	23.3	23.0	0.0	24.5	21.8	21.9	21.4	0.0	22.5	20.6	20.6	20.3	0.0	21.5
		36	0	22.4	22.6	22.2	1.0	23.5	21.9	22.0	21.7	0.0	22.5	20.7	20.8	20.5	0.0	21.5
		36	20	22.4	22.6	22.2	1.0	23.5	21.9	22.0	21.6	0.0	22.5	20.7	20.9	20.5	0.0	21.5
		36	39	22.3	22.6	22.2	1.0	23.5	21.9	22.0	21.7	0.0	22.5	20.6	20.8	20.4	0.0	21.5
		75	0	22.4	22.5	22.1	1.0	23.5	21.9	22.0	21.6	0.0	22.5	20.7	20.8	20.4	0.0	21.5
	16QAM	1	0	22.7	22.3	22.6	1.0	23.5	22.1	22.3	21.6	0.0	22.5	21.1	20.7	20.9	0.0	21.5
		1	37	22.7	22.4	22.5	1.0	23.5	22.2	22.4	21.5	0.0	22.5	21.2	20.8	20.9	0.0	21.5
		1	74	22.7	22.3	22.4	1.0	23.5	22.1	22.3	21.4	0.0	22.5	21.0	20.7	20.7	0.0	21.5
		36	0	21.5	21.6	21.3	2.0	22.5	21.4	21.6	21.3	0.0	22.5	20.8	21.0	20.7	0.0	21.5
		36	20	21.5	21.7	21.3	2.0	22.5	21.5	21.6	21.2	0.0	22.5	20.8	21.0	20.6	0.0	21.5
		36	39	21.4	21.6	21.3	2.0	22.5	21.4	21.5	21.2	0.0	22.5	20.7	20.9	20.6	0.0	21.5
		75	0	21.5	21.6	21.2	2.0	22.5	21.5	21.6	21.2	0.0	22.5	20.8	21.0	20.5	0.0	21.5
	64QAM	1	0	21.9	21.7	21.4	2.0	22.5	21.9	21.6	21.2	0.0	22.5	20.4	20.9	20.4	0.0	21.5
		1	37	22.0	21.8	21.3	2.0	22.5	22.0	21.7	21.2	0.0	22.5	20.4	21.0	20.4	0.0	21.5
		1	74	21.9	21.7	21.1	2.0	22.5	21.9	21.5	21.0	0.0	22.5	20.3	20.9	20.2	0.0	21.5
		36	0	20.5	20.6	20.3	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.5	20.5	20.2	0.0	21.5
		36	20	20.5	20.6	20.3	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.5	20.6	20.1	0.0	21.5
		36	39	20.4	20.6	20.3	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.4	20.5	20.2	0.0	21.5
		75	0	20.5	20.6	20.2	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.4	20.6	20.1	0.0	21.5

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				18650.0	18900.0	19150.0	MPR	Tune-up Limit	18650.0	18900.0	19150.0	MPR	Tune-up Limit	18650.0	18900.0	19150.0	MPR	Tune-up Limit
				1855 MHz	1880 MHz	1905 MHz			1855 MHz	1880 MHz	1905 MHz			1855 MHz	1880 MHz	1905 MHz		
10 MHz	QPSK	1	0	23.5	23.7	23.1	0.0	24.5	21.9	22.1	21.6	0.0	22.5	20.7	20.9	20.5	0.0	21.5
		1	25	23.3	23.6	23.0	0.0	24.5	21.8	22.0	21.5	0.0	22.5	20.6	20.8	20.3	0.0	21.5
		1	49	23.4	23.5	22.9	0.0	24.5	21.9	22.0	21.5	0.0	22.5	20.7	20.8	20.3	0.0	21.5
		25	0	21.8	22.0	21.7	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.6	20.9	20.5	0.0	21.5
		25	12	21.9	22.1	21.7	1.0	23.5	21.9	22.0	21.7	0.0	22.5	20.8	20.9	20.5	0.0	21.5
		25	25	21.9	22.1	21.6	1.0	23.5	21.9	22.0	21.5	0.0	22.5	20.7	20.8	20.4	0.0	21.5
		50	0	21.9	22.0	21.7	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.7	20.9	20.5	0.0	21.5
	16QAM	1	0	22.3	23.0	22.2	1.0	23.5	21.9	22.1	22.0	0.0	22.5	20.9	20.9	20.9	0.0	21.5
		1	25	22.2	22.9	22.0	1.0	23.5	21.8	22.0	21.9	0.0	22.5	20.7	20.8	20.8	0.0	21.5
		1	49	22.3	22.8	22.0	1.0	23.5	21.9	21.9	21.9	0.0	22.5	20.8	20.8	20.8	0.0	21.5
		25	0	21.9	22.1	21.8	2.0	22.5	21.9	22.1	21.7	0.0	22.5	20.8	21.0	20.6	0.0	21.5
		25	12	22.0	22.1	21.8	2.0	22.5	22.0	22.1	21.7	0.0	22.5	20.9	21.0	20.6	0.0	21.5
		25	25	21.9	22.1	21.7	2.0	22.5	22.0	22.1	21.6	0.0	22.5	20.9	20.9	20.5	0.0	21.5
		50	0	21.9	22.1	21.7	2.0	22.5	21.9	22.1	21.6	0.0	22.5	20.9	20.9	20.6	0.0	21.5
	64QAM	1	0	21.6	22.0	21.3	2.0	22.5	21.7	21.6	21.2	0.0	22.5	20.9	21.3	20.5	0.0	21.5
		1	25	21.5	21.9	21.2	2.0	22.5	21.6	21.6	21.0	0.0	22.5	20.8	21.2	20.5	0.0	21.5
		1	49	21.6	21.8	21.1	2.0	22.5	21.6	21.5	21.0	0.0	22.5	20.9	21.1	20.4	0.0	21.5
		25	0	20.4	20.7	20.3	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.2	20.4	20.1	0.0	21.5
		25	12	20.6	20.7	20.3	3.0	21.5	20.5	20.6	20.5	0.0	22.5	20.3	20.5	20.1	0.0	21.5
		25	25	20.5	20.6	20.2	3.0	21.5	20.5	20.6	20.5	0.0	22.5	20.3	20.4	20.0	0.0	21.5
		50	0	20.5	20.6	20.2	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.2	20.4	20.0	0.0	21.5

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 2 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				18625.0	18900.0	19175.0	MPR	Tune-up Limit	18625.0	18900.0	19175.0	MPR	Tune-up Limit	18625.0	18900.0	19175.0	MPR	Tune-up Limit
				1852.5 MHz	1880 MHz	1907.5 MHz			1852.5 MHz	1880 MHz	1907.5 MHz			1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	23.4	23.6	23.0	0.0	24.5	21.8	22.1	21.5	0.0	22.5	20.6	20.9	20.3	0.0	21.5
		1	12	23.4	23.7	23.0	0.0	24.5	21.9	22.1	21.5	0.0	22.5	20.7	20.9	20.4	0.0	21.5
		1	24	23.3	23.6	23.0	0.0	24.5	21.8	22.1	21.5	0.0	22.5	20.6	20.9	20.3	0.0	21.5
		12	0	22.3	22.5	22.1	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.7	20.9	20.4	0.0	21.5
		12	7	22.3	22.5	22.1	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.7	20.8	20.4	0.0	21.5
		12	13	22.3	22.5	22.1	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.6	20.8	20.4	0.0	21.5
		25	0	21.8	22.0	21.6	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.6	20.9	20.4	0.0	21.5
	16QAM	1	0	22.4	22.7	22.5	1.0	23.5	21.9	22.2	22.0	0.0	22.5	20.9	21.1	21.0	0.0	21.5
		1	12	22.4	22.7	22.6	1.0	23.5	21.9	22.2	22.1	0.0	22.5	20.8	21.1	21.0	0.0	21.5
		1	24	22.4	22.7	22.5	1.0	23.5	21.9	22.2	22.0	0.0	22.5	20.8	21.1	20.9	0.0	21.5
		12	0	21.4	21.7	21.3	2.0	22.5	21.4	21.6	21.2	0.0	22.5	20.8	21.0	20.6	0.0	21.5
		12	7	21.4	21.7	21.3	2.0	22.5	21.4	21.6	21.2	0.0	22.5	20.8	21.0	20.7	0.0	21.5
		12	13	21.4	21.7	21.3	2.0	22.5	21.4	21.7	21.2	0.0	22.5	20.8	21.0	20.6	0.0	21.5
		25	0	21.3	21.6	21.2	2.0	22.5	21.3	21.6	21.1	0.0	22.5	20.7	21.0	20.5	0.0	21.5
	64QAM	1	0	21.5	21.5	21.3	2.0	22.5	21.5	21.4	21.3	0.0	22.5	20.6	20.8	20.6	0.0	21.5
		1	12	21.6	21.5	21.4	2.0	22.5	21.5	21.4	21.2	0.0	22.5	20.9	20.8	20.7	0.0	21.5
		1	24	21.5	21.5	21.3	2.0	22.5	21.4	21.3	21.2	0.0	22.5	20.9	20.8	20.6	0.0	21.5
		12	0	20.4	20.7	20.1	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.2	20.4	19.9	0.0	21.5
		12	7	20.4	20.6	20.1	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.2	20.4	19.9	0.0	21.5
		12	13	20.4	20.6	20.1	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.2	20.4	19.8	0.0	21.5
		25	0	20.4	20.6	20.1	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.2	20.4	19.9	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				18615.0	18900.0	19185.0	MPR	Tune-up Limit	18615.0	18900.0	19185.0	MPR	Tune-up Limit	18615.0	18900.0	19185.0	MPR	Tune-up Limit
				1851.5 MHz	1880 MHz	1908.5 MHz			1851.5 MHz	1880 MHz	1908.5 MHz			1851.5 MHz	1880 MHz	1908.5 MHz		
3 MHz	QPSK	1	0	23.3	23.5	23.0	0.0	24.5	21.8	21.9	21.5	0.0	22.5	20.7	20.8	20.3	0.0	21.5
		1	8	23.4	23.7	23.1	0.0	24.5	21.9	22.1	21.6	0.0	22.5	20.7	20.9	20.5	0.0	21.5
		1	14	23.3	23.5	23.0	0.0	24.5	21.7	21.9	21.5	0.0	22.5	20.6	20.8	20.3	0.0	21.5
		8	0	22.3	22.5	22.1	1.0	23.5	21.8	22.0	21.5	0.0	22.5	20.6	20.8	20.3	0.0	21.5
		8	4	22.3	22.6	22.1	1.0	23.5	21.8	22.0	21.6	0.0	22.5	20.6	20.8	20.4	0.0	21.5
		8	7	22.4	22.6	22.1	1.0	23.5	21.8	22.0	21.5	0.0	22.5	20.6	20.8	20.4	0.0	21.5
		15	0	22.3	22.5	22.1	1.0	23.5	21.8	22.0	21.5	0.0	22.5	20.6	20.8	20.4	0.0	21.5
	16QAM	1	0	22.2	22.9	22.1	1.0	23.5	21.8	21.9	21.9	0.0	22.5	20.8	20.8	20.8	0.0	21.5
		1	8	22.3	23.0	22.1	1.0	23.5	21.9	22.0	22.0	0.0	22.5	20.8	20.9	20.9	0.0	21.5
		1	14	22.2	22.9	22.0	1.0	23.5	21.8	21.9	21.9	0.0	22.5	20.7	20.8	20.8	0.0	21.5
		8	0	21.5	21.7	21.1	2.0	22.5	21.4	21.6	21.1	0.0	22.5	20.8	21.0	20.5	0.0	21.5
		8	4	21.5	21.7	21.2	2.0	22.5	21.4	21.7	21.2	0.0	22.5	20.8	21.0	20.5	0.0	21.5
		8	7	21.5	21.6	21.2	2.0	22.5	21.4	21.7	21.2	0.0	22.5	20.8	21.0	20.5	0.0	21.5
		15	0	21.4	21.6	21.1	2.0	22.5	21.3	21.6	21.1	0.0	22.5	20.7	20.9	20.5	0.0	21.5
	64QAM	1	0	21.6	21.8	21.1	2.0	22.5	21.6	21.5	21.2	0.0	22.5	20.8	21.1	20.4	0.0	21.5
		1	8	21.6	22.0	21.3	2.0	22.5	21.7	21.6	21.3	0.0	22.5	20.9	21.2	20.6	0.0	21.5
		1	14	21.5	21.8	21.2	2.0	22.5	21.6	21.5	21.2	0.0	22.5	20.7	21.1	20.4	0.0	21.5
		8	0	20.3	20.6	20.1	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.1	20.4	19.9	0.0	21.5
		8	4	20.3	20.7	20.2	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.1	20.4	19.9	0.0	21.5
		8	7	20.3	20.6	20.2	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.1	20.4	19.9	0.0	21.5
		15	0	20.4	20.6	20.1	3.0	21.5	20.5	20.5	20.5	0.0	22.5	20.1	20.3	19.9	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				18607.0	18900.0	19193.0	MPR	Tune-up Limit	18607.0	18900.0	19193.0	MPR	Tune-up Limit	18607.0	18900.0	19193.0	MPR	Tune-up Limit
				1850.7 MHz	1880 MHz	1909.3 MHz			1850.7 MHz	1880 MHz	1909.3 MHz			1850.7 MHz	1880 MHz	1909.3 MHz		
1.4 MHz	QPSK	1	0	23.2	23.5	23.0	0.0	24.5	21.8	21.9	21.5	0.0	22.5	20.6	20.8	20.4	0.0	21.5
		1	3	23.3	23.6	23.0	0.0	24.5	21.8	21.9	21.5	0.0	22.5	20.7	20.8	20.4	0.0	21.5
		1	5	23.2	23.5	22.9	0.0	24.5	21.8	21.9	21.4	0.0	22.5	20.6	20.8	20.4	0.0	21.5
		3	0	23.2	23.4	23.0	0.0	24.5	21.8	21.9	21.4	0.0	22.5	20.7	20.7	20.4	0.0	21.5
		3	1	23.3	23.5	23.0	0.0	24.5	21.9	21.9	21.5	0.0	22.5	20.8	20.8	20.5	0.0	21.5
		3	3	23.2	23.5	23.0	0.0	24.5	21.9	21.9	21.5	0.0	22.5	20.7	20.8	20.4	0.0	21.5
		6	0	22.3	22.5	22.0	1.0	23.5	21.8	21.9	21.5	0.0	22.5	20.7	20.8	20.3	0.0	21.5
	16QAM	1	0	22.2	22.6	22.3	1.0	23.5	22.2	22.0	21.5	0.0	22.5	20.7	21.0	20.7	0.0	21.5
		1	3	22.3	22.6	22.4	1.0	23.5	22.2	22.0	21.6	0.0	22.5	20.8	21.0	20.8	0.0	21.5
		1	5	22.3	22.5	22.3	1.0	23.5	22.2	22.0	21.6	0.0	22.5	20.8	21.0	20.7	0.0	21.5
		3	0	22.4	22.5	22.1	1.0	23.5	22.0	22.1	21.5	0.0	22.5	20.9	20.9	20.6	0.0	21.5
		3	1	22.5	22.6	22.2	1.0	23.5	22.0	22.2	21.5	0.0	22.5	21.0	21.0	20.6	0.0	21.5
		3	3	22.4	22.6	22.2	1.0	23.5	22.0	22.2	21.6	0.0	22.5	21.0	20.9	20.6	0.0	21.5
		6	0	21.5	21.6	21.0	2.0	22.5	21.2	21.7	21.2	0.0	22.5	20.9	21.0	20.3	0.0	21.5
	64QAM	1	0	21.5	21.9	21.2	2.0	22.5	21.6	21.5	21.1	0.0	22.5	20.8	21.2	20.4	0.0	21.5
		1	3	21.5	22.0	21.3	2.0	22.5	21.7	21.6	21.2	0.0	22.5	20.9	21.3	20.5	0.0	21.5
		1	5	21.5	21.8	21.1	2.0	22.5	21.6	21.5	21.1	0.0	22.5	20.8	21.2	20.3	0.0	21.5
		3	0	21.3	21.8	21.1	2.0	22.5	21.5	21.5	20.9	0.0	22.5	20.6	21.1	20.4	0.0	21.5
		3	1	21.4	21.9	21.2	2.0	22.5	21.6	21.6	21.0	0.0	22.5	20.7	21.2	20.5	0.0	21.5
		3	3	21.4	21.8	21.2	2.0	22.5	21.6	21.6	21.0	0.0	22.5	20.6	21.1	20.5	0.0	21.5
		6	0	20.5	20.5	20.3	3.0	21.5	20.6	20.7	20.5	0.0	22.5	20.1	20.3	20.1	0.0	21.5

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 4 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
					20175		MPR	Tune-up Limit		20175		MPR	Tune-up Limit		20175		MPR	Tune-up Limit
					1732.5 MHz					1732.5 MHz					1732.5 MHz			
20 MHz	QPSK	1	0		23.8		0.0	24.5		21.8		0.0	22.5		20.8		0.0	21.5
		1	49		23.6		0.0	24.5		21.6		0.0	22.5		20.6		0.0	21.5
		1	99		23.7		0.0	24.5		21.6		0.0	22.5		20.6		0.0	21.5
		50	0		22.8		1.0	23.5		21.8		0.0	22.5		20.8		0.0	21.5
		50	24		22.7		1.0	23.5		21.7		0.0	22.5		20.7		0.0	21.5
		50	50		22.6		1.0	23.5		21.6		0.0	22.5		20.7		0.0	21.5
		100	0		22.7		1.0	23.5		21.7		0.0	22.5		20.7		0.0	21.5
	16QAM	1	0		23.2		1.0	23.5		22.3		0.0	22.5		21.4		0.0	21.5
		1	49		23.2		1.0	23.5		22.2		0.0	22.5		21.3		0.0	21.5
		1	99		23.1		1.0	23.5		22.1		0.0	22.5		21.2		0.0	21.5
		50	0		21.9		2.0	22.5		21.9		0.0	22.5		21.0		0.0	21.5
		50	24		21.8		2.0	22.5		21.8		0.0	22.5		20.9		0.0	21.5
		50	50		21.7		2.0	22.5		21.7		0.0	22.5		20.8		0.0	21.5
		100	0		21.8		2.0	22.5		21.8		0.0	22.5		20.8		0.0	21.5
	64QAM	1	0		21.9		2.0	22.5		22.1		0.0	22.5		21.5		0.0	21.5
		1	49		21.9		2.0	22.5		22.1		0.0	22.5		21.5		0.0	21.5
		1	99		21.8		2.0	22.5		22.0		0.0	22.5		21.5		0.0	21.5
		50	0		20.8		3.0	21.5		21.0		0.0	22.5		20.8		0.0	21.5
		50	24		20.7		3.0	21.5		20.9		0.0	22.5		20.7		0.0	21.5
		50	50		20.6		3.0	21.5		20.8		0.0	22.5		20.6		0.0	21.5
		100	0		20.6		3.0	21.5		20.9		0.0	22.5		20.7		0.0	21.5

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				20025.0	20175.0	20325.0	MPR	Tune-up Limit	20025.0	20175.0	20325.0	MPR	Tune-up Limit	20025.0	20175.0	20325.0	MPR	Tune-up Limit
				1717.5 MHz	1732.5 MHz	1747.5 MHz			1717.5 MHz	1732.5 MHz	1747.5 MHz			1717.5 MHz	1732.5 MHz	1747.5 MHz		
15 MHz	QPSK	1	0	23.7	23.8	23.9	0.0	24.5	21.6	21.8	21.8	0.0	22.5	20.6	20.8	20.8	0.0	21.5
		1	37	23.7	23.7	23.7	0.0	24.5	21.6	21.7	21.6	0.0	22.5	20.5	20.6	20.6	0.0	21.5
		1	74	23.7	23.7	23.8	0.0	24.5	21.7	21.7	21.7	0.0	22.5	20.6	20.7	20.7	0.0	21.5
		36	0	22.7	22.8	22.8	1.0	23.5	21.6	21.8	21.7	0.0	22.5	20.6	20.8	20.7	0.0	21.5
		36	20	22.7	22.7	22.7	1.0	23.5	21.6	21.7	21.7	0.0	22.5	20.6	20.7	20.6	0.0	21.5
		36	39	22.7	22.7	22.7	1.0	23.5	21.7	21.7	21.7	0.0	22.5	20.6	20.6	20.6	0.0	21.5
		75	0	22.7	22.7	22.7	1.0	23.5	21.8	21.7	21.7	0.0	22.5	20.7	20.7	20.7	0.0	21.5
	16QAM	1	0	22.9	22.6	23.1	1.0	23.5	22.0	21.7	22.2	0.0	22.5	21.0	20.8	21.2	0.0	21.5
		1	37	22.7	22.6	22.8	1.0	23.5	21.9	21.6	21.9	0.0	22.5	21.0	20.7	21.0	0.0	21.5
		1	74	22.9	22.6	22.9	1.0	23.5	22.0	21.6	22.0	0.0	22.5	21.1	20.6	21.1	0.0	21.5
		36	0	21.7	21.9	21.9	2.0	22.5	21.7	21.9	21.9	0.0	22.5	20.7	20.9	20.9	0.0	21.5
		36	20	21.7	21.8	21.8	2.0	22.5	21.7	21.8	21.8	0.0	22.5	20.7	20.8	20.8	0.0	21.5
		36	39	21.7	21.7	21.7	2.0	22.5	21.8	21.7	21.7	0.0	22.5	20.7	20.7	20.7	0.0	21.5
		75	0	21.8	21.8	21.8	2.0	22.5	21.8	21.8	21.8	0.0	22.5	20.8	20.8	20.8	0.0	21.5
	64QAM	1	0	22.0	21.9	21.8	2.0	22.5	22.2	22.1	22.0	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	37	21.9	21.9	21.5	2.0	22.5	22.1	22.1	21.7	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	74	22.1	21.9	21.6	2.0	22.5	22.2	22.0	21.8	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		36	0	20.6	20.7	20.7	3.0	21.5	20.8	20.9	20.9	0.0	22.5	20.6	20.7	20.7	0.0	21.5
		36	20	20.6	20.6	20.7	3.0	21.5	20.7	20.8	20.8	0.0	22.5	20.6	20.6	20.6	0.0	21.5
		36	39	20.6	20.6	20.6	3.0	21.5	20.8	20.8	20.8	0.0	22.5	20.6	20.6	20.6	0.0	21.5
		75	0	20.7	20.6	20.6	3.0	21.5	20.9	20.8	20.8	0.0	22.5	20.7	20.6	20.6	0.0	21.5

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				20000.0	20175.0	20350.0	MPR	Tune-up Limit	20000.0	20175.0	20350.0	MPR	Tune-up Limit	20000.0	20175.0	20350.0	MPR	Tune-up Limit
				1715 MHz	1732.5 MHz	1750 MHz			1715 MHz	1732.5 MHz	1750 MHz			1715 MHz	1732.5 MHz	1750 MHz		
10 MHz	QPSK	1	0	23.4	23.8	23.8	0.0	24.5	21.4	21.8	21.6	0.0	22.5	20.3	20.8	20.7	0.0	21.5
		1	25	23.4	23.7	23.8	0.0	24.5	21.4	21.6	21.6	0.0	22.5	20.4	20.6	20.6	0.0	21.5
		1	49	23.5	23.7	23.8	0.0	24.5	21.4	21.6	21.6	0.0	22.5	20.4	20.6	20.6	0.0	21.5
		25	0	22.5	22.7	22.6	1.0	23.5	21.5	21.8	21.6	0.0	22.5	20.5	20.8	20.7	0.0	21.5
		25	12	22.5	22.7	22.6	1.0	23.5	21.5	21.7	21.6	0.0	22.5	20.5	20.7	20.6	0.0	21.5
		25	25	22.5	22.6	22.7	1.0	23.5	21.5	21.7	21.7	0.0	22.5	20.5	20.6	20.7	0.0	21.5
		50	0	22.5	22.7	22.6	1.0	23.5	21.5	21.7	21.6	0.0	22.5	20.5	20.7	20.7	0.0	21.5
	16QAM	1	0	22.4	22.7	23.0	1.0	23.5	21.4	22.2	21.7	0.0	22.5	20.5	20.8	21.0	0.0	21.5
		1	25	22.4	22.5	22.9	1.0	23.5	21.3	22.0	21.6	0.0	22.5	20.5	20.6	21.0	0.0	21.5
		1	49	22.4	22.5	22.9	1.0	23.5	21.4	22.0	21.6	0.0	22.5	20.5	20.6	21.0	0.0	21.5
		25	0	22.5	22.5	22.5	2.0	22.5	21.6	21.9	21.7	0.0	22.5	20.7	20.9	20.7	0.0	21.5
		25	12	22.5	22.5	22.5	2.0	22.5	21.6	21.8	21.7	0.0	22.5	20.7	20.8	20.7	0.0	21.5
		25	25	22.5	22.5	22.5	2.0	22.5	21.5	21.8	21.7	0.0	22.5	20.6	20.8	20.8	0.0	21.5
		50	0	22.5	22.5	22.5	2.0	22.5	21.5	21.8	21.6	0.0	22.5	20.6	20.8	20.7	0.0	21.5
	64QAM	1	0	21.4	22.0	21.6	2.0	22.5	21.5	22.0	21.9	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	25	21.5	21.9	21.5	2.0	22.5	21.6	21.9	21.9	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	49	21.4	21.8	21.6	2.0	22.5	21.6	21.8	21.9	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		25	0	21.0	21.2	21.0	3.0	21.5	21.6	22.0	21.7	0.0	22.5	20.6	20.7	20.7	0.0	21.5
		25	12	21.0	21.1	20.9	3.0	21.5	21.6	21.9	21.7	0.0	22.5	20.6	20.6	20.6	0.0	21.5
		25	25	20.9	21.1	21.0	3.0	21.5	21.6	21.9	21.7	0.0	22.5	20.6	20.6	20.6	0.0	21.5
		50	0	20.9	21.1	20.9	3.0	21.5	21.6	21.9	21.7	0.0	22.5	20.7	20.6	20.6	0.0	21.5

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 4 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				19975.0	20175.0	20375.0	MPR	Tune-up Limit	19975.0	20175.0	20375.0	MPR	Tune-up Limit	19975.0	20175.0	20375.0	MPR	Tune-up Limit
				1712.5 MHz	1732.5 MHz	1752.5 MHz			1712.5 MHz	1732.5 MHz	1752.5 MHz			1712.5 MHz	1732.5 MHz	1752.5 MHz		
5 MHz	QPSK	1	0	23.4	23.9	23.9	0.0	24.5	21.4	21.8	21.7	0.0	22.5	20.4	20.8	20.7	0.0	21.5
		1	12	23.4	23.8	23.7	0.0	24.5	21.4	21.7	21.6	0.0	22.5	20.3	20.7	20.6	0.0	21.5
		1	24	23.6	23.8	23.8	0.0	24.5	21.5	21.7	21.7	0.0	22.5	20.4	20.7	20.6	0.0	21.5
		12	0	22.4	22.7	22.7	1.0	23.5	21.4	21.7	21.7	0.0	22.5	20.4	20.7	20.7	0.0	21.5
		12	7	22.4	22.7	22.7	1.0	23.5	21.4	21.7	21.7	0.0	22.5	20.3	20.7	20.7	0.0	21.5
		12	13	22.5	22.6	22.7	1.0	23.5	21.5	21.7	21.7	0.0	22.5	20.4	20.6	20.7	0.0	21.5
		25	0	22.4	22.7	22.7	1.0	23.5	21.4	21.7	21.7	0.0	22.5	20.5	20.7	20.7	0.0	21.5
	16QAM	1	0	22.4	22.9	23.1	1.0	23.5	21.5	21.9	22.2	0.0	22.5	20.6	20.9	21.3	0.0	21.5
		1	12	22.4	22.8	23.1	1.0	23.5	21.4	21.8	22.1	0.0	22.5	20.5	20.9	21.2	0.0	21.5
		1	24	22.5	22.8	23.1	1.0	23.5	21.6	21.8	22.2	0.0	22.5	20.6	20.9	21.2	0.0	21.5
		12	0	21.5	21.8	21.8	2.0	22.5	21.5	21.8	21.8	0.0	22.5	20.5	20.9	20.9	0.0	21.5
		12	7	21.5	21.8	21.8	2.0	22.5	21.5	21.8	21.8	0.0	22.5	20.5	20.9	20.9	0.0	21.5
		12	13	21.5	21.8	21.8	2.0	22.5	21.6	21.8	21.8	0.0	22.5	20.6	20.8	20.9	0.0	21.5
		25	0	21.4	21.7	21.7	2.0	22.5	21.5	21.8	21.7	0.0	22.5	20.5	20.8	20.8	0.0	21.5
	64QAM	1	0	21.5	21.6	21.8	2.0	22.5	21.7	21.7	22.0	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	12	21.4	21.5	21.8	2.0	22.5	21.7	21.7	21.9	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	24	21.5	21.5	21.7	2.0	22.5	21.7	21.7	21.9	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		12	0	20.4	20.7	20.5	3.0	21.5	20.5	20.8	20.7	0.0	22.5	20.4	20.6	20.5	0.0	21.5
		12	7	20.4	20.6	20.5	3.0	21.5	20.5	20.8	20.7	0.0	22.5	20.4	20.7	20.5	0.0	21.5
		12	13	20.5	20.6	20.5	3.0	21.5	20.6	20.8	20.7	0.0	22.5	20.4	20.6	20.5	0.0	21.5
		25	0	20.4	20.6	20.6	3.0	21.5	20.6	20.8	20.7	0.0	22.5	20.4	20.6	20.5	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				19965.0	20175.0	20385.0	MPR	Tune-up Limit	19965.0	20175.0	20385.0	MPR	Tune-up Limit	19965.0	20175.0	20385.0	MPR	Tune-up Limit
				1711.5 MHz	1732.5 MHz	1753.5 MHz			1711.5 MHz	1732.5 MHz	1753.5 MHz			1711.5 MHz	1732.5 MHz	1753.5 MHz		
3 MHz	QPSK	1	0	23.3	23.7	23.8	0.0	24.5	21.3	21.6	21.7	0.0	22.5	20.3	20.6	20.7	0.0	21.5
		1	8	23.4	23.7	23.9	0.0	24.5	21.4	21.7	21.8	0.0	22.5	20.3	20.7	20.7	0.0	21.5
		1	14	23.3	23.7	23.8	0.0	24.5	21.3	21.6	21.7	0.0	22.5	20.2	20.6	20.7	0.0	21.5
		8	0	22.4	22.7	22.7	1.0	23.5	21.3	21.7	21.7	0.0	22.5	20.3	20.7	20.7	0.0	21.5
		8	4	22.4	22.7	22.8	1.0	23.5	21.4	21.7	21.8	0.0	22.5	20.3	20.7	20.7	0.0	21.5
		8	7	22.4	22.7	22.7	1.0	23.5	21.4	21.7	21.7	0.0	22.5	20.3	20.7	20.7	0.0	21.5
		15	0	22.3	22.7	22.7	1.0	23.5	21.4	21.7	21.7	0.0	22.5	20.3	20.7	20.7	0.0	21.5
	16QAM	1	0	22.3	22.6	22.9	1.0	23.5	21.4	21.6	22.0	0.0	22.5	20.5	20.7	21.1	0.0	21.5
		1	8	22.4	22.7	23.0	1.0	23.5	21.5	21.7	22.1	0.0	22.5	20.5	20.7	21.1	0.0	21.5
		1	14	22.3	22.5	22.9	1.0	23.5	21.4	21.6	22.0	0.0	22.5	20.4	20.6	21.1	0.0	21.5
		8	0	21.4	21.8	21.7	2.0	22.5	21.4	21.8	21.8	0.0	22.5	20.4	20.9	20.8	0.0	21.5
		8	4	21.4	21.8	21.8	2.0	22.5	21.5	21.9	21.8	0.0	22.5	20.5	20.9	20.8	0.0	21.5
		8	7	21.4	21.8	21.8	2.0	22.5	21.5	21.8	21.8	0.0	22.5	20.4	20.9	20.8	0.0	21.5
		15	0	21.4	21.8	21.7	2.0	22.5	21.4	21.8	21.7	0.0	22.5	20.4	20.8	20.8	0.0	21.5
	64QAM	1	0	21.4	21.9	21.6	2.0	22.5	21.7	22.1	21.8	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	8	21.4	22.0	21.6	2.0	22.5	21.7	22.2	21.9	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	14	21.3	21.8	21.6	2.0	22.5	21.6	22.0	21.8	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		8	0	20.2	20.6	20.6	3.0	21.5	20.5	20.8	20.8	0.0	22.5	20.3	20.7	20.6	0.0	21.5
		8	4	20.3	20.7	20.6	3.0	21.5	20.5	20.8	20.8	0.0	22.5	20.4	20.7	20.6	0.0	21.5
		8	7	20.3	20.7	20.6	3.0	21.5	20.5	20.8	20.8	0.0	22.5	20.4	20.7	20.6	0.0	21.5
		15	0	20.3	20.6	20.6	3.0	21.5	20.6	20.7	20.8	0.0	22.5	20.4	20.6	20.6	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				19957.0	20175.0	20393.0	MPR	Tune-up Limit	19957.0	20175.0	20393.0	MPR	Tune-up Limit	19957.0	20175.0	20393.0	MPR	Tune-up Limit
				1710.7 MHz	1732.5 MHz	1754.3 MHz			1710.7 MHz	1732.5 MHz	1754.3 MHz			1710.7 MHz	1732.5 MHz	1754.3 MHz		
1.4 MHz	QPSK	1	0	23.3	23.7	23.7	0.0	24.5	21.4	21.5	21.7	0.0	22.5	20.2	20.6	20.6	0.0	21.5
		1	3	23.4	23.7	23.7	0.0	24.5	21.4	21.6	21.7	0.0	22.5	20.2	20.6	20.6	0.0	21.5
		1	5	23.3	23.6	23.7	0.0	24.5	21.4	21.5	21.6	0.0	22.5	20.2	20.6	20.6	0.0	21.5
		3	0	23.1	23.6	23.5	0.0	24.5	21.4	21.6	21.6	0.0	22.5	20.2	20.6	20.6	0.0	21.5
		3	1	23.2	23.7	23.6	0.0	24.5	21.4	21.7	21.7	0.0	22.5	20.3	20.6	20.7	0.0	21.5
		3	3	23.2	23.6	23.6	0.0	24.5	21.4	21.7	21.6	0.0	22.5	20.2	20.6	20.7	0.0	21.5
		6	0	22.3	22.6	22.7	1.0	23.5	21.3	21.6	21.7	0.0	22.5	20.2	20.6	20.6	0.0	21.5
	16QAM	1	0	22.2	22.7	22.9	1.0	23.5	21.7	21.6	21.6	0.0	22.5	20.3	20.8	21.0	0.0	21.5
		1	3	22.3	22.8	22.9	1.0	23.5	21.7	21.7	21.7	0.0	22.5	20.4	20.8	21.1	0.0	21.5
		1	5	22.2	22.7	22.9	1.0	23.5	21.7	21.7	21.7	0.0	22.5	20.3	20.8	21.0	0.0	21.5
		3	0	22.4	22.7	22.7	1.0	23.5	21.5	21.8	21.7	0.0	22.5	20.5	20.7	20.9	0.0	21.5
		3	1	22.5	22.8	22.8	1.0	23.5	21.6	21.9	21.8	0.0	22.5	20.5	20.8	20.9	0.0	21.5
		3	3	22.4	22.7	22.8	1.0	23.5	21.6	21.9	21.7	0.0	22.5	20.6	20.8	20.9	0.0	21.5
		6	0	21.5	21.8	21.5	2.0	22.5	21.2	21.8	21.8	0.0	22.5	20.4	20.8	20.6	0.0	21.5
	64QAM	1	0	21.3	21.6	21.8	2.0	22.5	21.6	22.1	21.7	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	3	21.3	21.7	21.8	2.0	22.5	21.6	22.2	21.8	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		1	5	21.2	21.7	21.7	2.0	22.5	21.6	22.1	21.7	0.0	22.5	21.5	21.5	21.5	0.0	21.5
		3	0	21.3	21.5	21.7	2.0	22.5	21.4	22.1	21.8	0.0	22.5	20.5	20.6	20.9	0.0	21.5
		3	1	21.4	21.6	21.8	2.0	22.5	21.5	22.2	21.9	0.0	22.5	20.6	20.7	20.9	0.0	21.5
		3	3	21.3	21.6	21.8	2.0	22.5	21.5	22.1	21.9	0.0	22.5	20.6	20.7	21.0	0.0	21.5
		6	0	20.5	20.6	20.4	3.0	21.5	20.5	20.6	21.0	0.0	22.5	20.6	20.6	20.4	0.0	21.5

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				[redacted]	20525	[redacted]		
					836.5 MHz			
10 MHz	QPSK	1	0		24.3		0.0	25.0
		1	25		24.3		0.0	25.0
		1	49		24.3		0.0	25.0
		25	0		23.3		1.0	24.0
		25	12		23.4		1.0	24.0
		25	25		23.3		1.0	24.0
		50	0		23.3		1.0	24.0
	16QAM	1	0		23.5		1.0	24.0
		1	25		23.6		1.0	24.0
		1	49		23.6		1.0	24.0
		25	0		21.9		2.0	23.0
		25	12		21.9		2.0	23.0
		25	25		21.9		2.0	23.0
		50	0		21.9		2.0	23.0
	64QAM	1	0		22.5		2.0	23.0
		1	25		22.6		2.0	23.0
		1	49		22.6		2.0	23.0
		25	0		22.0		3.0	22.0
		25	12		22.0		3.0	22.0
		25	25		21.9		3.0	22.0
		50	0		21.9		3.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				20425.0	20525.0	20625.0		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	24.3	24.4	24.3	0.0	25.0
		1	12	24.2	24.4	24.2	0.0	25.0
		1	24	24.3	24.4	24.2	0.0	25.0
		12	0	23.3	23.3	23.3	1.0	24.0
		12	7	23.4	23.3	23.3	1.0	24.0
		12	13	23.3	23.3	23.3	1.0	24.0
		25	0	23.3	23.3	23.2	1.0	24.0
	16QAM	1	0	23.3	23.5	23.7	1.0	24.0
		1	12	23.3	23.4	23.6	1.0	24.0
		1	24	23.4	23.5	23.6	1.0	24.0
		12	0	22.4	22.4	22.4	2.0	23.0
		12	7	22.4	22.4	22.4	2.0	23.0
		12	13	22.4	22.4	22.4	2.0	23.0
		25	0	22.3	22.4	22.3	2.0	23.0
	64QAM	1	0	22.6	22.3	22.6	2.0	23.0
		1	12	22.4	22.2	22.5	2.0	23.0
		1	24	22.5	22.3	22.5	2.0	23.0
		12	0	21.4	21.4	21.3	3.0	22.0
		12	7	21.5	21.5	21.3	3.0	22.0
		12	13	21.5	21.4	21.2	3.0	22.0
		25	0	21.5	21.4	21.3	3.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 5 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				20415.0	20525.0	20635.0		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	24.2	24.3	24.3	0.0	25.0
		1	8	24.3	24.4	24.3	0.0	25.0
		1	14	24.2	24.3	24.2	0.0	25.0
		8	0	23.3	23.3	23.2	1.0	24.0
		8	4	23.3	23.3	23.3	1.0	24.0
		8	7	23.3	23.3	23.2	1.0	24.0
		15	0	23.3	23.3	23.2	1.0	24.0
	16QAM	1	0	23.3	23.1	23.5	1.0	24.0
		1	8	23.3	23.2	23.5	1.0	24.0
		1	14	23.2	23.1	23.5	1.0	24.0
		8	0	22.3	22.4	22.3	2.0	23.0
		8	4	22.4	22.5	22.3	2.0	23.0
		8	7	22.4	22.4	22.3	2.0	23.0
		15	0	22.2	22.4	22.3	2.0	23.0
	64QAM	1	0	22.5	22.6	22.3	2.0	23.0
		1	8	22.5	22.7	22.4	2.0	23.0
		1	14	22.4	22.6	22.3	2.0	23.0
		8	0	21.3	21.4	21.3	3.0	22.0
		8	4	21.3	21.5	21.4	3.0	22.0
		8	7	21.3	21.4	21.4	3.0	22.0
		15	0	21.4	21.4	21.3	3.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				20407.0	20525.0	20643.0		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	24.2	24.2	24.1	0.0	25.0
		1	3	24.3	24.3	24.1	0.0	25.0
		1	5	24.2	24.2	24.1	0.0	25.0
		3	0	24.1	24.2	24.0	0.0	25.0
		3	1	24.1	24.3	24.1	0.0	25.0
		3	3	24.2	24.2	24.1	0.0	25.0
		6	0	23.2	23.3	23.2	1.0	24.0
	16QAM	1	0	23.2	23.5	23.0	1.0	24.0
		1	3	23.3	23.6	23.1	1.0	24.0
		1	5	23.2	23.6	23.1	1.0	24.0
		3	0	23.2	23.4	23.2	1.0	24.0
		3	1	23.3	23.4	23.3	1.0	24.0
		3	3	23.2	23.4	23.3	1.0	24.0
		6	0	22.3	22.2	22.3	2.0	23.0
	64QAM	1	0	21.2	22.3	22.3	2.0	23.0
		1	3	22.6	22.4	22.3	2.0	23.0
		1	5	22.5	22.3	22.3	2.0	23.0
		3	0	22.4	22.4	22.1	2.0	23.0
		3	1	22.5	22.5	22.2	2.0	23.0
		3	3	22.5	22.4	22.2	2.0	23.0
		6	0	21.2	21.6	21.3	3.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
					23095			
					707.5 MHz			
10 MHz	QPSK	1	0		24.1		0.0	25.0
		1	25		24.2		0.0	25.0
		1	49		24.1		0.0	25.0
		25	0		23.2		1.0	24.0
		25	12		23.2		1.0	24.0
		25	25		23.2		1.0	24.0
		50	0		23.2		1.0	24.0
	16QAM	1	0		23.1		1.0	24.0
		1	25		23.1		1.0	24.0
		1	49		23.0		1.0	24.0
		25	0		22.3		2.0	23.0
		25	12		22.3		2.0	23.0
		25	25		22.3		2.0	23.0
		50	0		22.3		2.0	23.0
	64QAM	1	0		22.4		2.0	23.0
		1	25		22.4		2.0	23.0
		1	49		22.3		2.0	23.0
		25	0		21.5		3.0	22.0
		25	12		21.5		3.0	22.0
		25	25		21.4		3.0	22.0
		50	0		21.4		3.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				23035.0	23095.0	23155.0		
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	24.3	24.3	24.0	0.0	25.0
		1	12	24.3	24.3	23.8	0.0	25.0
		1	24	24.3	24.2	23.9	0.0	25.0
		12	0	23.3	23.2	23.1	1.0	24.0
		12	7	23.3	23.2	23.0	1.0	24.0
		12	13	23.2	23.2	22.9	1.0	24.0
		25	0	23.3	23.2	23.0	1.0	24.0
	16QAM	1	0	23.4	23.4	23.5	1.0	24.0
		1	12	23.3	23.3	23.4	1.0	24.0
		1	24	23.4	23.3	23.4	1.0	24.0
		12	0	22.4	22.4	22.3	2.0	23.0
		12	7	22.4	22.4	22.1	2.0	23.0
		12	13	22.3	22.3	22.1	2.0	23.0
		25	0	22.3	22.3	22.2	2.0	23.0
	64QAM	1	0	22.6	22.2	22.5	2.0	23.0
		1	12	22.5	22.2	22.4	2.0	23.0
		1	24	22.6	22.2	22.3	2.0	23.0
		12	0	21.4	21.4	21.2	3.0	22.0
		12	7	21.4	21.4	21.1	3.0	22.0
		12	13	21.4	21.3	21.1	3.0	22.0
		25	0	21.5	21.3	21.2	3.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 12 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				23025.0	23095.0	23165.0		
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	24.3	24.2	23.9	0.0	25.0
		1	8	24.3	24.2	24.0	0.0	25.0
		1	14	24.2	24.2	23.9	0.0	25.0
		8	0	23.3	23.2	22.9	1.0	24.0
		8	4	23.3	23.2	23.0	1.0	24.0
		8	7	23.2	23.2	23.0	1.0	24.0
		15	0	23.3	23.2	22.9	1.0	24.0
	16QAM	1	0	23.3	23.1	23.3	1.0	24.0
		1	8	23.3	23.1	23.3	1.0	24.0
		1	14	23.2	23.0	23.2	1.0	24.0
		8	0	22.3	22.3	22.0	2.0	23.0
		8	4	22.3	22.4	22.0	2.0	23.0
		8	7	22.3	22.4	22.0	2.0	23.0
		15	0	22.2	22.3	22.0	2.0	23.0
	64QAM	1	0	22.5	22.6	22.2	2.0	23.0
		1	8	22.6	22.6	22.3	2.0	23.0
		1	14	22.5	22.5	22.2	2.0	23.0
		8	0	21.3	21.3	21.1	3.0	22.0
		8	4	21.4	21.4	21.2	3.0	22.0
		8	7	21.3	21.4	21.2	3.0	22.0
		15	0	21.4	21.3	21.2	3.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				23017.0	23095.0	23173.0		
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.3	24.1	23.7	0.0	25.0
		1	3	24.3	24.2	23.8	0.0	25.0
		1	5	24.2	24.1	23.8	0.0	25.0
		3	0	24.1	24.1	23.7	0.0	25.0
		3	1	24.2	24.2	23.8	0.0	25.0
		3	3	24.2	24.1	23.8	0.0	25.0
		6	0	23.2	23.1	22.8	1.0	24.0
	16QAM	1	0	23.3	23.5	22.8	1.0	24.0
		1	3	23.3	23.5	22.8	1.0	24.0
		1	5	23.3	23.5	22.8	1.0	24.0
		3	0	23.3	23.3	23.0	1.0	24.0
		3	1	23.3	23.4	23.1	1.0	24.0
		3	3	23.3	23.4	23.0	1.0	24.0
		6	0	22.4	22.1	22.0	2.0	23.0
	64QAM	1	0	22.4	22.3	22.4	2.0	23.0
		1	3	22.5	22.4	22.4	2.0	23.0
		1	5	22.4	22.4	22.3	2.0	23.0
		3	0	22.4	22.2	22.3	2.0	23.0
		3	1	22.5	22.3	22.4	2.0	23.0
		3	3	22.5	22.2	22.4	2.0	23.0
		6	0	21.6	21.3	21.0	3.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 13 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				[redacted]	23230 782 MHz	[redacted]		
10 MHz	QPSK	1	0	[redacted]	24.3	[redacted]	0.0	25.0
		1	25	[redacted]	24.4	[redacted]	0.0	25.0
		1	49	[redacted]	24.2	[redacted]	0.0	25.0
		25	0	[redacted]	23.2	[redacted]	1.0	24.0
		25	12	[redacted]	23.2	[redacted]	1.0	24.0
		25	25	[redacted]	23.2	[redacted]	1.0	24.0
		50	0	[redacted]	23.2	[redacted]	1.0	24.0
	16QAM	1	0	[redacted]	22.9	[redacted]	1.0	24.0
		1	25	[redacted]	23.0	[redacted]	1.0	24.0
		1	49	[redacted]	22.9	[redacted]	1.0	24.0
		25	0	[redacted]	22.1	[redacted]	2.0	23.0
		25	12	[redacted]	22.2	[redacted]	2.0	23.0
		25	25	[redacted]	22.2	[redacted]	2.0	23.0
		50	0	[redacted]	22.2	[redacted]	2.0	23.0
	64QAM	1	0	[redacted]	22.3	[redacted]	2.0	23.0
		1	25	[redacted]	22.4	[redacted]	2.0	23.0
		1	49	[redacted]	22.4	[redacted]	2.0	23.0
		25	0	[redacted]	21.2	[redacted]	3.0	22.0
		25	12	[redacted]	21.3	[redacted]	3.0	22.0
		25	25	[redacted]	21.3	[redacted]	3.0	22.0
		50	0	[redacted]	21.3	[redacted]	3.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				[redacted]	23230.0 782 MHz	[redacted]		
5 MHz	QPSK	1	0	[redacted]	24.3	[redacted]	0.0	25.0
		1	12	[redacted]	24.2	[redacted]	0.0	25.0
		1	24	[redacted]	24.2	[redacted]	0.0	25.0
		12	0	[redacted]	23.2	[redacted]	1.0	24.0
		12	7	[redacted]	23.2	[redacted]	1.0	24.0
		12	13	[redacted]	23.1	[redacted]	1.0	24.0
		25	0	[redacted]	23.2	[redacted]	1.0	24.0
	16QAM	1	0	[redacted]	23.2	[redacted]	1.0	24.0
		1	12	[redacted]	23.3	[redacted]	1.0	24.0
		1	24	[redacted]	23.2	[redacted]	1.0	24.0
		12	0	[redacted]	22.2	[redacted]	2.0	23.0
		12	7	[redacted]	22.2	[redacted]	2.0	23.0
		12	13	[redacted]	22.2	[redacted]	2.0	23.0
		25	0	[redacted]	22.1	[redacted]	2.0	23.0
	64QAM	1	0	[redacted]	22.0	[redacted]	2.0	23.0
		1	12	[redacted]	22.0	[redacted]	2.0	23.0
		1	24	[redacted]	22.0	[redacted]	2.0	23.0
		12	0	[redacted]	21.2	[redacted]	3.0	22.0
		12	7	[redacted]	21.2	[redacted]	3.0	22.0
		12	13	[redacted]	21.2	[redacted]	3.0	22.0
		25	0	[redacted]	21.1	[redacted]	3.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							Grip Sensor Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	24.0	23.9	23.6	23.7	23.8	0.0	24.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	49	23.8	23.6	23.4	23.5	23.6	0.0	24.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		1	99	23.8	23.4	23.5	23.5	23.6	0.0	24.0	21.4	21.4	21.5	21.5	21.5	0.0	22.0
		50	0	22.9	22.8	22.5	22.7	22.8	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		50	24	22.9	22.6	22.5	22.7	22.8	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		50	50	22.8	22.5	22.5	22.6	22.7	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		100	0	22.9	22.6	22.5	22.6	22.7	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	16QAM	1	0	23.0	22.9	22.5	22.9	22.8	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	49	22.9	22.6	22.3	22.8	22.7	1.0	23.0	21.5	21.5	21.4	21.5	21.5	0.0	22.0
		1	99	23.0	22.4	22.3	22.8	22.6	1.0	23.0	21.5	21.4	21.4	21.5	21.5	0.0	22.0
		50	0	21.9	21.8	21.6	21.9	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		50	24	21.9	21.6	21.6	21.9	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		50	50	21.9	21.5	21.5	21.8	21.8	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		100	0	21.9	21.6	21.5	21.8	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	64QAM	1	0	21.9	22.0	21.5	21.9	22.0	2.0	22.0	20.9	21.5	21.5	21.5	21.5	0.0	22.0
		1	49	21.8	22.0	21.4	21.7	22.0	2.0	22.0	20.8	21.4	21.2	21.5	21.5	0.0	22.0
		1	99	21.8	21.7	21.3	21.7	22.0	2.0	22.0	20.8	21.4	21.2	21.5	21.5	0.0	22.0
		50	0	20.9	20.8	20.6	20.9	20.9	3.0	21.0	20.0	20.2	20.3	20.8	20.7	0.0	22.0
		50	24	20.9	20.7	20.6	20.8	20.9	3.0	21.0	20.0	20.3	20.3	20.7	20.7	0.0	22.0
		50	50	20.9	20.6	20.5	20.8	20.9	3.0	21.0	19.9	20.2	20.3	20.7	20.6	0.0	22.0
		100	0	20.9	20.6	20.5	20.8	20.9	3.0	21.0	20.0	20.2	20.3	20.7	20.6	0.0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							Grip Sensor Power (dBm)						
				39750.0	40185.0	40620.0	41055.0	41490.0	MPR	Tune-up Limit	39750.0	40185.0	40620.0	41055.0	41490.0	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15 MHz	QPSK	1	0	22.8	23.8	23.5	23.6	23.7	0.0	24.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	37	23.7	23.7	23.4	23.5	23.6	0.0	24.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		1	74	23.8	23.5	23.4	23.5	23.5	0.0	24.0	21.4	21.4	21.4	21.5	21.5	0.0	22.0
		36	0	22.9	22.8	22.5	22.6	22.6	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		36	20	22.9	22.6	22.5	22.6	22.6	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		36	39	22.8	22.6	22.5	22.5	22.6	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		75	0	22.9	22.6	22.5	22.6	22.6	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	16QAM	1	0	22.9	22.8	22.6	22.7	22.8	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	37	22.8	22.6	22.5	22.6	22.7	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	74	22.8	22.4	22.5	22.7	22.7	1.0	23.0	21.5	21.4	21.5	21.5	21.5	0.0	22.0
		36	0	21.9	21.8	21.6	21.7	21.7	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		36	20	21.9	21.7	21.6	21.7	21.7	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		36	39	21.8	21.6	21.6	21.6	21.7	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		75	0	21.9	21.7	21.6	21.7	21.7	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	64QAM	1	0	22.0	21.6	21.1	22.0	21.7	2.0	22.0	20.5	21.1	21.5	21.3	21.5	0.0	22.0
		1	37	22.0	21.5	21.0	22.0	21.6	2.0	22.0	20.4	20.9	21.5	21.2	21.4	0.0	22.0
		1	74	22.0	21.3	21.0	22.0	21.6	2.0	22.0	20.4	20.9	21.4	21.2	21.3	0.0	22.0
		36	0	20.9	20.7	20.6	20.8	20.8	3.0	21.0	20.0	20.1	20.3	20.7	20.6	0.0	22.0
		36	20	20.9	20.6	20.6	20.8	20.7	3.0	21.0	20.0	20.2	20.3	20.7	20.6	0.0	22.0
		36	39	20.9	20.5	20.6	20.7	20.7	3.0	21.0	20.0	20.1	20.3	20.6	20.5	0.0	22.0
		75	0	20.9	20.7	20.6	20.7	20.7	3.0	21.0	19.9	20.2	20.3	20.6	20.6	0.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 41 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							Grip Sensor Power (dBm)						
				39750.0	40185.0	40620.0	41055.0	41490.0	MPR	Tune-up Limit	39750.0	40185.0	40620.0	41055.0	41490.0	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	23.8	23.7	23.5	22.8	23.6	0.0	24.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	25	23.8	23.6	23.4	22.7	23.5	0.0	24.0	21.4	21.4	21.5	21.5	21.5	0.0	22.0
		1	49	23.7	23.5	23.4	22.0	23.6	0.0	24.0	21.4	21.4	21.5	21.5	21.5	0.0	22.0
		25	0	22.3	22.2	22.0	21.8	22.2	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		25	12	22.3	22.1	22.0	21.8	22.2	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		25	25	22.3	22.0	21.9	21.8	22.2	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		50	0	22.3	22.0	21.9	23.0	22.2	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	16QAM	1	0	23.0	22.7	22.5	23.0	22.7	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	25	22.9	22.6	22.5	23.0	22.6	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	49	22.9	22.4	22.4	22.2	22.6	1.0	23.0	21.5	21.4	21.5	21.5	21.5	0.0	22.0
		25	0	21.9	21.7	21.5	22.0	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		25	12	21.9	21.6	21.5	22.0	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		25	25	21.8	21.6	21.5	22.0	21.8	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		50	0	21.9	21.6	21.6	22.0	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	64QAM	1	0	22.0	21.8	21.1	22.0	21.9	2.0	22.0	20.5	21.2	21.5	21.3	21.5	0.0	22.0
		1	25	22.0	21.7	21.0	22.0	21.8	2.0	22.0	20.5	21.1	21.5	21.2	21.5	0.0	22.0
		1	49	22.0	21.5	21.0	21.9	21.8	2.0	22.0	20.5	21.1	21.4	21.1	21.5	0.0	22.0
		25	0	20.8	20.7	20.5	20.8	20.8	3.0	21.0	20.0	20.1	20.3	20.8	20.6	0.0	22.0
		25	12	20.8	20.6	20.6	20.8	20.8	3.0	21.0	20.0	20.2	20.2	20.8	20.6	0.0	22.0
		25	25	20.8	20.5	20.5	20.7	20.8	3.0	21.0	19.9	20.1	20.2	20.7	20.6	0.0	22.0
		50	0	20.8	20.6	20.5	20.7	20.8	3.0	21.0	19.9	20.2	20.2	20.7	20.6	0.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							Grip Sensor Power (dBm)						
				39750.0	40185.0	40620.0	41055.0	41490.0	MPR	Tune-up Limit	39750.0	40185.0	40620.0	41055.0	41490.0	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	23.8	23.6	23.5	23.5	23.5	0.0	24.0	21.3	21.4	21.5	21.5	21.5	0.0	22.0
		1	12	23.7	23.6	23.4	23.5	23.5	0.0	24.0	21.4	21.4	21.5	21.5	21.5	0.0	22.0
		1	24	23.8	23.4	23.4	23.5	23.5	0.0	24.0	21.3	21.4	21.5	21.5	21.5	0.0	22.0
		12	0	22.8	22.7	22.5	22.6	22.6	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		12	7	22.8	22.6	22.5	22.6	22.6	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		12	13	22.8	22.5	22.5	22.6	22.7	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
		25	0	22.8	22.6	22.5	22.6	22.7	1.0	23.0	21.4	21.5	21.5	21.5	21.5	0.0	22.0
	16QAM	1	0	22.9	22.6	22.4	22.8	22.6	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	12	22.9	22.5	22.4	22.8	22.7	1.0	23.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		1	24	22.9	22.4	22.4	22.8	22.6	1.0	23.0	21.5	21.4	21.5	21.5	21.5	0.0	22.0
		12	0	21.9	21.7	21.5	21.8	21.8	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		12	7	21.9	21.6	21.5	21.8	21.9	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		12	13	21.9	21.6	21.5	21.8	21.8	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
		25	0	21.8	21.6	21.5	21.8	21.8	2.0	22.0	21.5	21.5	21.5	21.5	21.5	0.0	22.0
	64QAM	1	0	22.0	21.4	21.8	21.8	21.4	2.0	22.0	20.6	21.2	21.5	21.5	21.5	0.0	22.0
		1	12	21.9	21.4	21.8	21.8	21.4	2.0	22.0	20.6	21.2	21.5	21.4	21.5	0.0	22.0
		1	24	21.9	21.2	21.8	21.8	21.3	2.0	22.0	20.6	21.2	21.5	21.3	21.5	0.0	22.0
		12	0	20.8	20.7	20.6	20.7	20.8	3.0	21.0	19.9	20.1	20.3	20.7	20.5	0.0	22.0
		12	7	20.8	20.6	20.6	20.8	20.8	3.0	21.0	19.9	20.1	20.4	20.7	20.5	0.0	22.0
		12	13	20.8	20.6	20.6	20.7	20.8	3.0	21.0	19.9	20.1	20.3	20.7	20.4	0.0	22.0
		25	0	20.8	20.6	20.5	20.7	20.8	3.0	21.0	19.9	20.1	20.2	20.8	20.4	0.0	22.0

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 66 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	23.0	23.2	23.0	0.0	24.0	21.4	21.5	21.5	0.0	22.5	20.4	20.6	20.5	0.0	21.5
		1	49	22.8	23.0	22.7	0.0	24.0	21.3	21.6	21.2	0.0	22.5	20.3	20.5	20.2	0.0	21.5
		1	99	23.0	22.8	22.6	0.0	24.0	21.4	21.3	21.1	0.0	22.5	20.4	20.3	20.1	0.0	21.5
		50	0	22.0	22.2	22.0	1.0	23.0	21.5	21.7	21.4	0.0	22.5	20.5	20.7	20.4	0.0	21.5
		50	24	22.0	22.1	21.8	1.0	23.0	21.5	21.6	21.3	0.0	22.5	20.5	20.7	20.3	0.0	21.5
		50	50	22.0	22.0	21.8	1.0	23.0	21.5	21.6	21.3	0.0	22.5	20.6	20.5	20.3	0.0	21.5
		100	0	22.0	22.1	21.8	1.0	23.0	21.5	21.6	21.3	0.0	22.5	20.5	20.6	20.3	0.0	21.5
	16QAM	1	0	22.3	22.7	22.4	1.0	23.0	21.8	22.2	22.0	0.0	22.5	20.9	21.2	21.0	0.0	21.5
		1	49	22.2	22.5	22.2	1.0	23.0	21.8	22.1	21.8	0.0	22.5	20.8	21.1	20.7	0.0	21.5
		1	99	22.4	22.3	22.1	1.0	23.0	21.9	21.9	21.7	0.0	22.5	20.9	20.9	20.6	0.0	21.5
		50	0	21.1	21.3	21.1	2.0	22.0	21.0	21.3	21.1	0.0	22.5	20.6	20.8	20.6	0.0	21.5
		50	24	21.1	21.2	21.0	2.0	22.0	21.1	21.2	20.9	0.0	22.5	20.6	20.7	20.4	0.0	21.5
		50	50	21.1	21.1	20.9	2.0	22.0	21.1	21.1	20.9	0.0	22.5	20.7	20.6	20.4	0.0	21.5
		100	0	21.1	21.2	20.9	2.0	22.0	21.1	21.2	20.9	0.0	22.5	20.6	20.7	20.4	0.0	21.5
	64QAM	1	0	21.2	21.6	21.7	2.0	22.0	21.2	21.6	21.7	0.0	22.5	20.7	21.3	20.9	0.0	21.5
		1	49	21.1	21.4	21.5	2.0	22.0	21.2	21.4	21.5	0.0	22.5	20.6	21.2	20.6	0.0	21.5
		1	99	21.3	21.3	21.4	2.0	22.0	21.3	21.3	21.4	0.0	22.5	20.8	21.0	20.6	0.0	21.5
		50	0	20.2	20.4	20.2	3.0	21.0	21.2	21.4	21.2	0.0	22.5	20.1	20.3	20.1	0.0	21.5
		50	24	20.2	20.3	20.0	3.0	21.0	21.2	21.3	21.0	0.0	22.5	20.1	20.3	20.0	0.0	21.5
		50	50	20.2	20.3	20.0	3.0	21.0	21.2	21.2	20.9	0.0	22.5	20.2	20.2	19.9	0.0	21.5
		100	0	20.2	20.3	20.0	3.0	21.0	21.1	21.3	21.0	0.0	22.5	20.1	20.2	19.9	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				132047.0	132322.0	132597.0	MPR	Tune-up Limit	132047.0	132322.0	132597.0	MPR	Tune-up Limit	132047.0	132322.0	132597.0	MPR	Tune-up Limit
				1717.5 MHz	1745 MHz	1772.5 MHz			1717.5 MHz	1745 MHz	1772.5 MHz			1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	QPSK	1	0	23.0	23.2	23.0	0.0	24.0	21.5	21.6	21.5	0.0	22.5	20.5	20.6	20.4	0.0	21.5
		1	37	22.9	23.1	22.8	0.0	24.0	21.4	21.5	21.3	0.0	22.5	20.4	20.5	20.3	0.0	21.5
		1	74	23.0	22.9	22.7	0.0	24.0	21.4	21.3	21.2	0.0	22.5	20.4	20.3	20.2	0.0	21.5
		36	0	22.0	22.2	21.8	1.0	23.0	21.5	21.6	21.3	0.0	22.5	20.4	20.7	20.3	0.0	21.5
		36	20	21.9	22.1	21.8	1.0	23.0	21.4	21.6	21.3	0.0	22.5	20.4	20.6	20.3	0.0	21.5
		36	39	22.0	22.1	21.8	1.0	23.0	21.5	21.5	21.3	0.0	22.5	20.5	20.5	20.3	0.0	21.5
		75	0	22.0	22.1	21.8	1.0	23.0	21.5	21.6	21.3	0.0	22.5	20.5	20.6	20.3	0.0	21.5
	16QAM	1	0	22.3	22.0	22.3	1.0	23.0	21.8	21.6	21.9	0.0	22.5	20.9	20.6	20.9	0.0	21.5
		1	37	22.2	21.9	22.2	1.0	23.0	21.8	21.4	21.7	0.0	22.5	20.8	20.5	20.7	0.0	21.5
		1	74	22.4	21.8	22.1	1.0	23.0	21.9	21.3	21.6	0.0	22.5	20.9	20.4	20.6	0.0	21.5
		36	0	21.0	21.2	21.0	2.0	22.0	21.0	21.2	21.0	0.0	22.5	20.5	20.8	20.5	0.0	21.5
		36	20	21.0	21.2	21.0	2.0	22.0	21.0	21.2	21.0	0.0	22.5	20.5	20.7	20.4	0.0	21.5
		36	39	21.0	21.1	20.9	2.0	22.0	21.0	21.2	20.9	0.0	22.5	20.5	20.6	20.5	0.0	21.5
		75	0	21.1	21.2	21.0	2.0	22.0	21.1	21.2	21.0	0.0	22.5	20.6	20.7	20.4	0.0	21.5
	64QAM	1	0	21.6	21.5	21.2	2.0	22.0	21.6	21.5	21.2	0.0	22.5	21.1	20.8	20.8	0.0	21.5
		1	37	21.5	21.4	21.0	2.0	22.0	21.5	21.4	21.0	0.0	22.5	21.1	20.7	20.7	0.0	21.5
		1	74	21.7	21.3	20.9	2.0	22.0	21.7	21.2	20.9	0.0	22.5	21.1	20.6	20.6	0.0	21.5
		36	0	20.1	20.3	20.0	3.0	21.0	21.1	21.3	21.0	0.0	22.5	20.1	20.3	20.0	0.0	21.5
		36	20	20.0	20.2	20.0	3.0	21.0	21.1	21.3	21.0	0.0	22.5	20.0	20.2	19.9	0.0	21.5
		36	39	20.1	20.2	20.0	3.0	21.0	21.1	21.2	21.0	0.0	22.5	20.0	20.2	19.9	0.0	21.5
		75	0	20.2	20.3	20.0	3.0	21.0	21.2	21.2	20.9	0.0	22.5	20.2	20.2	19.9	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				132022.0	132322.0	132622.0	MPR	Tune-up Limit	132022.0	132322.0	132622.0	MPR	Tune-up Limit	132022.0	132322.0	132622.0	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	22.8	23.0	22.8	0.0	24.0	21.3	21.5	21.3	0.0	22.5	20.3	20.5	20.3	0.0	21.5
		1	25	22.8	23.0	22.7	0.0	24.0	21.3	21.5	21.1	0.0	22.5	20.3	20.5	20.1	0.0	21.5
		1	49	22.8	23.0	22.7	0.0	24.0	21.3	21.5	21.2	0.0	22.5	20.3	20.5	20.2	0.0	21.5
		25	0	21.9	22.1	21.8	1.0	23.0	21.5	21.6	21.3	0.0	22.5	20.5	20.6	20.3	0.0	21.5
		25	12	21.9	22.1	21.8	1.0	23.0	21.4	21.6	21.3	0.0	22.5	20.4	20.6	20.3	0.0	21.5
		25	25	21.9	22.1	21.7	1.0	23.0	21.4	21.5	21.2	0.0	22.5	20.4	20.6	20.2	0.0	21.5
		50	0	21.9	22.1	21.8	1.0	23.0	21.4	21.6	21.4	0.0	22.5	20.4	20.6	20.3	0.0	21.5
	16QAM	1	0	21.9	21.9	22.3	1.0	23.0	21.4	21.4	21.8	0.0	22.5	20.4	20.5	20.8	0.0	21.5
		1	25	21.9	21.9	22.0	1.0	23.0	21.4	21.4	21.6	0.0	22.5	20.4	20.5	20.6	0.0	21.5
		1	49	21.9	21.8	22.1	1.0	23.0	21.4	21.4	21.6	0.0	22.5	20.4	20.4	20.6	0.0	21.5
		25	0	21.1	21.2	20.9	2.0	22.0	21.1	21.2	21.0	0.0	22.5	20.6	20.7	20.5	0.0	21.5
		25	12	21.1	21.2	20.9	2.0	22.0	21.1	21.1	20.9	0.0	22.5	20.6	20.7	20.5	0.0	21.5
		25	25	21.1	21.1	20.8	2.0	22.0	21.1	21.1	20.8	0.0	22.5	20.6	20.6	20.3	0.0	21.5
		50	0	21.0	21.1	20.9	2.0	22.0	21.1	21.2	20.9	0.0	22.5	20.6	20.6	20.4	0.0	21.5
	64QAM	1	0	21.1	21.4	21.1	2.0	22.0	21.1	21.4	21.1	0.0	22.5	20.6	20.7	20.7	0.0	21.5
		1	25	21.1	21.4	20.9	2.0	22.0	21.1	21.4	20.9	0.0	22.5	20.6	20.6	20.5	0.0	21.5
		1	49	21.1	21.3	20.9	2.0	22.0	21.1	21.3	20.9	0.0	22.5	20.6	20.7	20.6	0.0	21.5
		25	0	20.2	20.3	20.1	3.0	21.0	21.2	21.3	21.1	0.0	22.5	20.2	20.3	20.0	0.0	21.5
		25	12	20.2	20.2	20.0	3.0	21.0	21.2	21.2	21.0	0.0	22.5	20.1	20.2	20.0	0.0	21.5
		25	25	20.1	20.2	19.9	3.0	21.0	21.1	21.2	20.9	0.0	22.5	20.1	20.2	19.8	0.0	21.5
		50	0	20.1	20.3	20.0	3.0	21.0	21.1	21.2	21.0	0.0	22.5	20.1	20.2	20.0	0.0	21.5

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Band 66 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				131997.0	132322.0	132647.0	MPR	Tune-up Limit	131997.0	132322.0	132647.0	MPR	Tune-up Limit	131997.0	132322.0	132647.0	MPR	Tune-up Limit
				1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	22.9	23.2	22.7	0.0	24.0	21.4	21.7	21.2	0.0	22.5	20.4	20.7	20.2	0.0	21.5
		1	12	22.8	23.1	22.7	0.0	24.0	21.3	21.6	21.1	0.0	22.5	20.3	20.6	20.1	0.0	21.5
		1	24	22.9	23.1	22.7	0.0	24.0	21.4	21.6	21.2	0.0	22.5	20.4	20.6	20.2	0.0	21.5
		12	0	21.8	22.1	21.7	1.0	23.0	21.3	21.6	21.3	0.0	22.5	20.4	20.6	20.2	0.0	21.5
		12	7	21.8	22.1	21.7	1.0	23.0	21.3	21.6	21.3	0.0	22.5	20.4	20.6	20.2	0.0	21.5
		12	13	21.9	22.0	21.7	1.0	23.0	21.4	21.5	21.2	0.0	22.5	20.4	20.6	20.2	0.0	21.5
		25	0	21.9	22.1	21.7	1.0	23.0	21.4	21.6	21.2	0.0	22.5	20.4	20.6	20.3	0.0	21.5
	16QAM	1	0	21.9	22.2	22.3	1.0	23.0	21.5	21.8	21.8	0.0	22.5	20.5	20.8	20.8	0.0	21.5
		1	12	21.9	22.1	22.3	1.0	23.0	21.4	21.7	21.8	0.0	22.5	20.4	20.7	20.8	0.0	21.5
		1	24	22.0	22.2	22.3	1.0	23.0	21.5	21.7	21.8	0.0	22.5	20.6	20.7	20.8	0.0	21.5
		12	0	21.0	21.2	20.9	2.0	22.0	20.9	21.2	20.9	0.0	22.5	20.5	20.7	20.4	0.0	21.5
		12	7	20.9	21.2	20.9	2.0	22.0	20.9	21.2	20.9	0.0	22.5	20.4	20.7	20.5	0.0	21.5
		12	13	21.0	21.2	20.9	2.0	22.0	21.0	21.2	20.9	0.0	22.5	20.5	20.7	20.4	0.0	21.5
		25	0	20.9	21.1	20.8	2.0	22.0	21.0	21.2	20.9	0.0	22.5	20.5	20.6	20.4	0.0	21.5
	64QAM	1	0	21.1	21.1	21.1	2.0	22.0	21.2	21.1	21.1	0.0	22.5	20.5	20.9	20.3	0.0	21.5
		1	12	21.1	21.0	21.1	2.0	22.0	21.1	21.0	21.1	0.0	22.5	20.6	20.9	20.2	0.0	21.5
		1	24	21.2	21.1	21.1	2.0	22.0	21.2	21.0	21.1	0.0	22.5	20.7	20.9	20.2	0.0	21.5
		12	0	20.0	20.3	19.8	3.0	21.0	21.0	21.2	20.8	0.0	22.5	19.9	20.1	19.8	0.0	21.5
		12	7	20.0	20.2	19.8	3.0	21.0	21.0	21.2	20.8	0.0	22.5	20.0	20.1	19.8	0.0	21.5
		12	13	20.1	20.2	19.8	3.0	21.0	21.1	21.2	20.8	0.0	22.5	20.0	20.1	19.8	0.0	21.5
		25	0	20.1	20.2	19.8	3.0	21.0	21.1	21.2	20.8	0.0	22.5	20.0	20.1	19.8	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				131987.0	132322.0	132657.0	MPR	Tune-up Limit	131987.0	132322.0	132657.0	MPR	Tune-up Limit	131987.0	132322.0	132657.0	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	22.7	23.0	22.7	0.0	24.0	21.3	21.4	21.1	0.0	22.5	20.3	20.5	20.2	0.0	21.5
		1	8	22.7	23.1	22.7	0.0	24.0	21.3	21.5	21.2	0.0	22.5	20.3	20.6	20.3	0.0	21.5
		1	14	22.7	23.0	22.7	0.0	24.0	21.2	21.5	21.1	0.0	22.5	20.2	20.6	20.3	0.0	21.5
		8	0	21.7	22.0	21.7	1.0	23.0	21.3	21.5	21.2	0.0	22.5	20.3	20.6	20.2	0.0	21.5
		8	4	21.8	22.0	21.7	1.0	23.0	21.3	21.5	21.2	0.0	22.5	20.4	20.6	20.3	0.0	21.5
		8	7	21.7	22.0	21.7	1.0	23.0	21.2	21.5	21.2	0.0	22.5	20.3	20.6	20.3	0.0	21.5
		15	0	21.7	22.0	21.6	1.0	23.0	21.3	21.5	21.2	0.0	22.5	20.4	20.6	20.2	0.0	21.5
	16QAM	1	0	21.8	21.9	22.1	1.0	23.0	21.7	21.4	21.3	0.0	22.5	20.4	20.5	20.7	0.0	21.5
		1	8	21.8	21.9	22.1	1.0	23.0	21.7	21.5	21.3	0.0	22.5	20.5	20.6	20.7	0.0	21.5
		1	14	21.7	21.8	22.0	1.0	23.0	21.6	21.3	21.3	0.0	22.5	20.4	20.5	20.7	0.0	21.5
		8	0	20.8	21.1	20.8	2.0	22.0	20.9	21.2	20.8	0.0	22.5	20.4	20.7	20.4	0.0	21.5
		8	4	20.9	21.2	20.8	2.0	22.0	20.9	21.2	20.8	0.0	22.5	20.5	20.8	20.4	0.0	21.5
		8	7	20.8	21.2	20.8	2.0	22.0	20.9	21.2	20.8	0.0	22.5	20.4	20.8	20.4	0.0	21.5
		15	0	20.7	21.1	20.7	2.0	22.0	20.8	21.1	20.7	0.0	22.5	20.3	20.7	20.4	0.0	21.5
	64QAM	1	0	21.1	21.4	20.9	2.0	22.0	21.1	21.4	20.9	0.0	22.5	20.5	20.9	20.6	0.0	21.5
		1	8	21.1	21.5	21.0	2.0	22.0	21.1	21.5	21.0	0.0	22.5	20.6	21.0	20.6	0.0	21.5
		1	14	21.0	21.4	20.9	2.0	22.0	21.0	21.4	20.9	0.0	22.5	20.5	20.9	20.5	0.0	21.5
		8	0	19.8	20.2	19.9	3.0	21.0	20.9	21.2	20.9	0.0	22.5	20.0	20.2	19.8	0.0	21.5
		8	4	19.9	20.2	19.9	3.0	21.0	20.9	21.2	20.9	0.0	22.5	20.0	20.3	19.8	0.0	21.5
		8	7	19.9	20.2	19.9	3.0	21.0	20.9	21.2	20.9	0.0	22.5	20.0	20.2	19.8	0.0	21.5
		15	0	20.0	20.2	19.9	3.0	21.0	20.9	21.2	20.9	0.0	22.5	20.0	20.2	19.9	0.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Hotspot Mode Power (dBm)					Grip Sensor Power (dBm)				
				131979.0	132322.0	132665.0	MPR	Tune-up Limit	131979.0	132322.0	132665.0	MPR	Tune-up Limit	131979.0	132322.0	132665.0	MPR	Tune-up Limit
				1710.7 MHz	1745 MHz	1779.3 MHz			1710.7 MHz	1745 MHz	1779.3 MHz			1710.7 MHz	1745 MHz	1779.3 MHz		
1.4 MHz	QPSK	1	0	22.8	23.0	22.5	0.0	24.0	21.2	21.4	21.1	0.0	22.5	20.2	20.6	20.2	0.0	21.5
		1	3	22.8	23.0	22.6	0.0	24.0	21.2	21.4	21.2	0.0	22.5	20.2	20.6	20.2	0.0	21.5
		1	5	22.7	22.9	22.6	0.0	24.0	21.1	21.4	21.1	0.0	22.5	20.2	20.6	20.2	0.0	21.5
		3	0	22.6	22.9	22.5	0.0	24.0	21.1	21.4	21.1	0.0	22.5	20.2	20.5	20.2	0.0	21.5
		3	1	22.7	22.9	22.6	0.0	24.0	21.2	21.4	21.2	0.0	22.5	20.3	20.6	20.3	0.0	21.5
		3	3	22.7	22.9	22.6	0.0	24.0	21.2	21.5	21.1	0.0	22.5	20.3	20.6	20.2	0.0	21.5
		6	0	21.7	21.9	21.6	1.0	23.0	21.2	21.4	21.1	0.0	22.5	20.3	20.5	20.1	0.0	21.5
	16QAM	1	0	21.8	22.3	21.6	1.0	23.0	21.3	21.5	21.5	0.0	22.5	20.3	20.6	20.6	0.0	21.5
		1	3	21.8	22.2	21.7	1.0	23.0	21.3	21.5	21.6	0.0	22.5	20.3	20.7	20.7	0.0	21.5
		1	5	21.8	22.2	21.6	1.0	23.0	21.3	21.5	21.5	0.0	22.5	20.3	20.6	20.6	0.0	21.5
		3	0	21.8	22.1	21.8	1.0	23.0	21.3	21.6	21.4	0.0	22.5	20.5	20.6	20.4	0.0	21.5
		3	1	21.8	22.2	21.9	1.0	23.0	21.3	21.7	21.4	0.0	22.5	20.5	20.7	20.5	0.0	21.5
		3	3	21.8	22.1	21.8	1.0	23.0	21.3	21.7	21.4	0.0	22.5	20.6	20.7	20.5	0.0	21.5
		6	0	20.8	20.9	20.8	2.0	22.0	20.8	21.2	20.6	0.0	22.5	20.4	20.7	20.2	0.0	21.5
	64QAM	1	0	20.9	21.2	21.1	2.0	22.0	21.0	21.4	20.9	0.0	22.5	20.7	20.7	20.4	0.0	21.5
		1	3	21.0	21.2	21.2	2.0	22.0	21.0	21.5	20.9	0.0	22.5	20.8	20.8	20.5	0.0	21.5
		1	5	20.9	21.2	21.1	2.0	22.0	21.0	21.4	20.9	0.0	22.5	20.7	20.7	20.3	0.0	21.5
		3	0	21.0	21.0	21.1	2.0	22.0	21.8	22.4	21.9	0.0	22.5	20.7	20.6	20.4	0.0	21.5
		3	1	21.1	21.1	21.1	2.0	22.0	21.9	22.5	22.0	0.0	22.5	20.8	20.6	20.5	0.0	21.5
		3	3	21.0	21.1	21.1	2.0	22.0	21.9	22.4	22.0	0.0	22.5	20.8	20.6	20.5	0.0	21.5
		6	0	20.1	20.2	19.7	3.0	21.0	20.9	21.0	21.0	0.0	22.5	19.8	20.2	20.1	0.0	21.5

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9.4. LTE Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 1
QPSK	> 25	> 50	> 75	> 100	≤ 2
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 2
16 QAM	> 25	> 50	> 75	> 100	≤ 3
64 QAM	≤ 8 and allocation wholly contained within a single CC	≤ 12 and allocation wholly contained within a single CC	≤ 16 and allocation wholly contained within a single CC	≤ 18 and allocation wholly contained within a single CC	≤ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	≤ 3

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPDK modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$MPR = CEIL\ \{\min(M_A, M_{IM5}), 0.5\}$$

Where M_A is defined as follows

$$M_A = \begin{cases} 8.2 & ;0 \le A < 0.025 \\ 9.2 - 40A & ;0.025 \le A < 0.05 \\ 8 - 16A & ;0.05 \le A < 0.25 \\ 4.83 - 3.33A & ;0.25 \le A \le 0.4 \end{cases}$$

This report shall not be reproduced without the written approval of UL Verification Services Inc.

$$3.83 - 0.83A \quad ;0.4 \le A \le 1$$

and M_{IM5} is defined as follows

$$M_{IM5} = \begin{cases} 4.5 & ; \Delta_{IM5} < 1.5 * BW_{Channel_CA} \\ 6.0 & ; 1.5 * BW_{Channel_CA} \le \Delta_{IM5} < BW_{Channel_CA}/2 + \Delta f_{ooB} \\ M_A & ; \Delta_{IM5} \ge BW_{Channel_CA}/2 + \Delta f_{ooB} \end{cases}$$

Where

$A = N_{RB_alloc} / N_{RB_agg}$

$\Delta_{IM5} = \max(\left| F_{C_agg} - (3*F_{agg_alloc_low} - 2*F_{agg_alloc_high}) \right|, \left| F_{C_agg} - (3*F_{agg_alloc_high} - 2*F_{agg_alloc_low}) \right|)$

CEIL{M_A, 0.5} means rounding upwards to closest 0.5dB, i.e. MPR ∈ [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined tfor those E-UTRA bands where maximum possible $W_{GAP} \le 42.2$ MHz as follows

$$MPR = CEIL\{M_A, 0.5\}$$

Where M_N is defined as follows

$$M_N = \begin{cases} -0.125N + 18.25 & ; 2 \le N \le 50 \\ -0.0333\,N + 13.67 & ; 50 < N \le 200 \end{cases}$$

Where $N = N_{RB_alloc}$ is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

LTE Down-Link Carrier Aggregation

The tables below show the supported frequency bands of the device for DL Inter-band and DL Intra-band combinations.

Power measurements were performed on the channel with the highest maximum output power from Tune-up Procedure.

When carrier aggregation is limited to downlink only, uplink maximum output power (single carrier) is measured for the supported combinations of downlink carrier aggregation listed in the table below. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs (far right most configuration highlighted in the table below).

Index	2CC	Restriction	Completely Covered by Measurement Superset
Intra-Band Contiguous			
2CC # 1	CA_2C	N/A	No
2CC # 2	CA_5B	N/A	No
2CC # 3	CA_12B	N/A	No
2CC # 4	CA_41C	N/A	No
2CC # 5	CA_66B	N/A	No
2CC # 6	CA_66C	N/A	No
Intra-Band Non-Contiguous			
2CC # 7	CA_2A-2A	N/A	No
2CC # 8	CA_4A-4A	N/A	No
2CC # 9	CA_5A-5A	N/A	No
2CC # 10	CA_12A-12A	N/A	No
2CC # 11	CA_41A-41A	N/A	No
2CC # 12	CA_66A-66A	N/A	No
Inter-Band			
2CC # 13	CA_2A+5A	N/A	No
2CC # 14	CA_2A+12A	N/A	No
2CC # 15	CA_2A+13A	N/A	No
2CC # 16	CA_2A+17A	N/A	No
2CC # 19	CA_4A+5A	N/A	No
2CC # 20	CA_4A+12A	12A SCC Only	3CC #1
2CC # 21	CA_4A+13A	N/A	No
2CC # 22	CA_4A+17A	17A SCC Only	No
2CC # 23	CA_5A+41A	41A SCC Only	No
2CC # 24	CA_66A+12A	12A SCC Only	No

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Index	3CC	Restriction	Completely Covered by Measurement Superset
Inter-Band			
3CC # 1	CA_4A-12A-12A	12A SCC1/SCC2 Only	No
3CC # 2	CA_41A-41C	N/A	No

In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the CA configuration with the largest aggregated DL CA BW in each frequency band, independently for contiguous and non-contiguous CA; however, if the same frequency band is used for both contiguous and non-contiguous CA, power measurement was performed using the configuration with the largest aggregated BW and maximum output power among contiguous and non-contiguous CA.

DL Intra-Band Contiguous Measured Results

E-UTRA CA configuration (BCS)	CC1 (UL)					CC2 (DL)			Aggregated BW	MPR	CA Inactive (dBm)	CA Active (dBm)	Delta
	Mode	BW (MHz)	Channel	Freq (MHz)	RB,Offset	BW (MHz)	Channel	Freq (MHz)					
CA_2C	QPSK	20	18801	1870.1	1,0	20	999	1969.9	40	0	23.8	23.9	0.08
CA_5B	QPSK	10	20476	831.6	1,0	10	2575	886.5	20	0	23.9	23.9	-0.02
CA_12B	QPSK	5	23048	702.8	1,0	10	5120	740	40	0	24.1	24.1	0.03
CA_41C	QPSK	20	40521	2583.1	1,0	20	40719	2602.9	40	0	22.7	22.7	-0.02
CA_66B	QPSK	10	132622	1775	1,0	10	67185	2184.9	60	0	23.6	23.5	-0.02
CA_66C	QPSK	20	132323	1745.1	1,0	20	66985	2164.9	60	0	23.7	23.8	0.05

DL Intra-Band Non-Contiguous Measured Results

E-UTRA CA configuration	CC1 (UL)					CC2 (DL)			Aggregated BW	MPR	CA Inactive (dBm)	CA Active (dBm)	Delta
	Mode	BW (MHz)	Channel	Freq (MHz)	RB,Offset	BW (MHz)	Channel	Freq (MHz)					
CA_2A-2A	QPSK	20	18700	1860	1,0	20	1100	1980	40	0	23.7	23.8	0.10
CA_4A-4A	QPSK	20	20050	1720	1,0	20	2300	2145	40	0	23.5	23.5	0.00
CA_5A-5A	QPSK	10	20450	829	1,0	10	2600	889	40	0	23.9	23.9	-0.10
CA_12A-12A	QPSK	5	23095	707.5	1,0	5	5035	731.5	60	0	24.0	24.0	0.00
CA_41A-41A	QPSK	20	39750	2506	1,0	20	41490	2680	80	0	22.8	22.8	0.00
CA_66A-66A	QPSK	20	132072	1720	1,0	20	67111	2190	100	0	23.5	23.6	0.10

DL Inter-Band (2 Bands) Measured Results

E-UTRA CA configuration	CC1 (UL)					CC2 (DL)			Aggregated BW	MPR	CA Inactive (dBm)	CA Active (dBm)	Delta
	Mode	BW (MHz)	Channel	Freq (MHz)	RB,Offset	BW (MHz)	Channel	Freq (MHz)					
CA_2A+5A	QPSK	20	18900	1880	1,0	10	2525	881.5	30	0	23.9	23.9	0.03
CA_2A+12A	QPSK	20	18900	1880	1,0	10	5095	737.5	30	0	23.9	24.0	0.05
CA_2A+13A	QPSK	20	18900	1880	1,0	10	5230	751	30	0	23.9	24.0	0.09
CA_2A+17A	QPSK	20	18900	1880	1,0	10	5790	740	30	0	23.7	23.7	0.02
CA_4A+5A	QPSK	20	20175	1723.5	1,0	10	2525	881.5	30	0	23.6	23.7	0.03
CA_4A+12A	QPSK	20	20175	1723.5	1,0	10	5095	737.5	30	0	23.6	23.7	0.08
CA_4A+13A	QPSK	20	20175	1723.5	1,0	10	5230	751	30	0	23.6	23.6	-0.01
CA_4A+17A	QPSK	20	20175	1723.5	1,0	10	5790	740	30	0	23.6	23.6	0.01
CA_5A+41A	QPSK	10	20525	836.5	1,0	20	39750	2506	30	0	24.0	24.0	0.03
CA_66A+12A	QPSK	20	132322	1745	1,0	10	5095	737.5	30	0	23.8	23.9	0.05

DL Inter-Band (3 Bands) Measured Results

E-UTRA CA configuration	CC1 (UL)					CC2 (DL)			CC3 (DL)			Aggregated BW	MPR	CA Inactive (dBm)	CA Active (dBm)	Delta
	Mode	BW (MHz)	Channel	Freq (MHz)	RB,Offset	BW (MHz)	Channel	Freq (MHz)	BW (MHz)	Channel	Freq (MHz)					
CA_4A+12A+12A	QPSK	20	20175	1723.5	1,49	5	5095	737.5	5	5035	731.5	30	0	23.6	23.6	-0.03
CA_41A-41C	QPSK	20	39750	2506	1,0	20	41292	2660.2	20	41490	2680	80	0	22.8	22.8	0.00

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9.5. Wi-Fi 2.4GHz (DTS Band)

Wi-Fi 2.4GHz Measured Results

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.
SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power(dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1 Mbps	1	2412	19.0	19.0	Yes	14.0	14.0	Yes
			6	2437	19.0	19.0		14.0	14.0	
			11	2462	19.0	19.0		14.0	14.0	
			12	2467	19.0	19.0		14.0	14.0	
			13	2472	19.0	19.0		14.0	14.0	
OFDM 2.4 GHz	802.11g	6 Mbps	1	2412		16.0	No		14.0	No
			2	2417		18.0			14.0	
			6	2437		18.0			14.0	
			11	2462		18.0			14.0	
			12	2467		18.0			14.0	
			13	2472		4.0			4.0	
	802.11n (HT20)	6.5 Mbps	1	2412		16.0	No		14.0	No
			2	2417		18.0			14.0	
			6	2437		18.0			14.0	
			11	2462		18.0			14.0	
			12	2467		18.0			14.0	
			13	2472		3.0			3.0	

Note(s):
SAR is not required for channel 12 and 13 because the tune-up limit and the measured output power for these two channels are not greater than those for the default test channels. Refer to KDB 248227 D01 section 3.1

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11b	1 Mbps	8.625	8.744	98.64%	1.01

Note(s):
Duty Cycle = (T on / period) * 100%

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Duty Cycle plots

802.11b

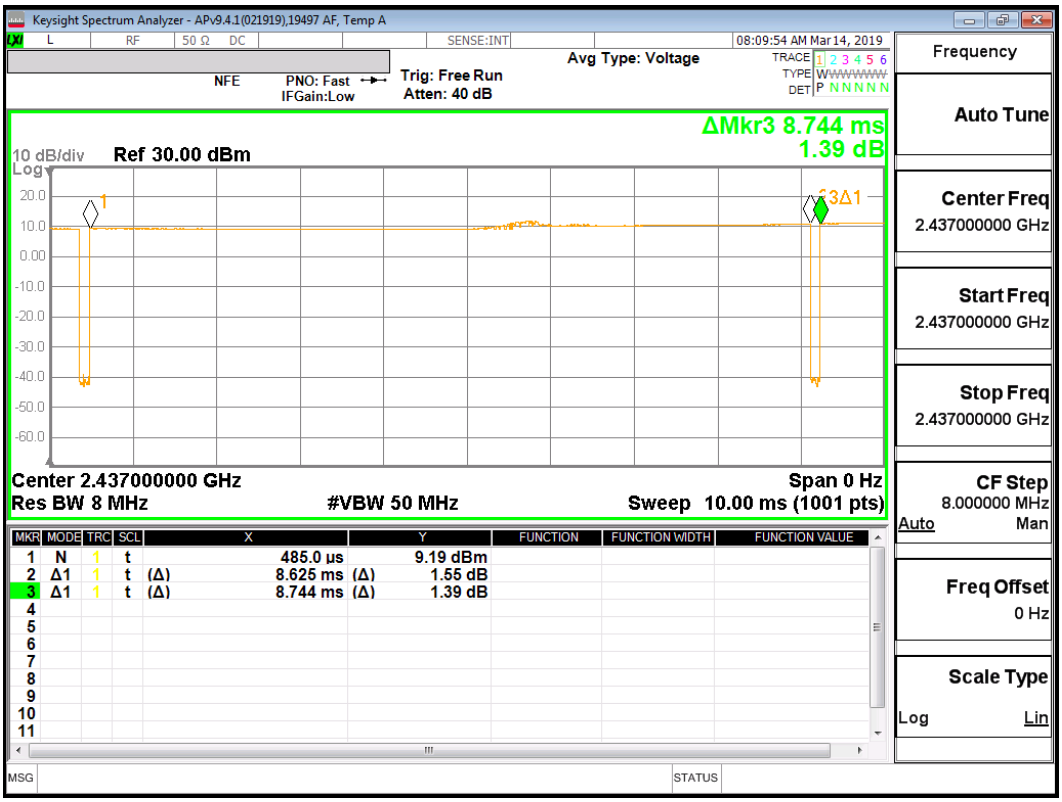

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9.6. Wi-Fi 5GHz (U-NII Bands)

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

Wi-Fi 5 GHz Measured Results

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power(dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 5.2 GHz	802.11a	6 Mbps	36	5180		18.0	No		11.0	No
			40	5200		18.0			11.0	
			44	5220		18.0			11.0	
			48	5240		18.0			11.0	
	802.11n (HT20)	6.5 Mbps	36	5180	19.0	19.0	Yes		11.0	No
			40	5200	19.0	19.0			11.0	
			44	5220	19.0	19.0			11.0	
			48	5240	19.0	19.0			11.0	
	802.11ac (VHT20)	6.5 Mbps	36	5180		19.0	No		11.0	No
			40	5200		19.0			11.0	
			44	5220		19.0			11.0	
			48	5240		19.0			11.0	
	802.11n (HT40)	13.5 Mbps	38	5190		17.0	No		11.0	No
			46	5230		18.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	38	5190		17.0	No		11.0	No
			46	5230		18.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	42	5210		16.0	No	11.0	11.0	Yes
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power(dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2A 5.3 GHz	802.11a	6 Mbps	52	5260		18.0	No		11.0	No
			56	5280		18.0			11.0	
			60	5300		18.0			11.0	
			64	5320		18.0			11.0	
	802.11n (HT20)	6.5 Mbps	52	5260	19.0	19.0	Yes		11.0	No
			56	5280	19.0	19.0			11.0	
			60	5300	19.0	19.0			11.0	
			64	5320	19.0	19.0			11.0	
	802.11ac (VHT20)	6.5 Mbps	52	5260		19.0	No		11.0	No
			56	5280		19.0			11.0	
			60	5300		19.0			11.0	
			64	5320		19.0			11.0	
	802.11n (HT40)	13.5 Mbps	54	5270		18.0	No		11.0	No
			62	5310		18.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	54	5270		18.0	No		11.0	No
			62	5310		18.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	58	5290		16.0	No	11.0	11.0	Yes

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power(dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11a	6 Mbps	100	5500		16.0	No		11.0	No
			116	5580		18.0			11.0	
			124	5620		18.0			11.0	
			144	5720		18.0			11.0	
	802.11n (HT20)	6.5 Mbps	100	5500	19.0	19.0	Yes		11.0	No
			116	5580	19.0	19.0			11.0	
			124	5620	19.0	19.0			11.0	
			144	5720	19.0	19.0			11.0	
	802.11ac (VHT20)	6.5 Mbps	100	5500		19.0	No		11.0	No
			116	5580		19.0			11.0	
			124	5620		19.0			11.0	
			144	5720		19.0			11.0	
	802.11n (HT40)	13.5 Mbps	102	5510		17.0	No		11.0	No
			118	5590		18.0			11.0	
			126	5630		18.0			11.0	
			142	5710		18.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	102	5510		17.0	No		11.0	No
			118	5590		18.0			11.0	
			126	5630		18.0			11.0	
			142	5710		18.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	106	5530		16.0	No	11.0	11.0	Yes
			122	5610		16.0		10.9	11.0	
			138	5690		16.0		11.0	11.0	
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power(dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-3 5.8 GHz	802.11a	6 Mbps	149	5745		18.0	No		11.0	No
			157	5785		18.0			11.0	
			165	5825		18.0			11.0	
	802.11n (HT20)	6.5 Mbps	149	5745	19.0	19.0	Yes		11.0	No
			157	5785	19.0	19.0			11.0	
			165	5825	19.0	19.0			11.0	
	802.11ac (VHT20)	6.5 Mbps	149	5745		19.0	No		11.0	No
			157	5785		19.0			11.0	
			165	5825		19.0			11.0	
	802.11n (HT40)	13.5 Mbps	151	5755		18.0	No		11.0	No
			159	5795		18.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	151	5755		18.0	No		11.0	No
			159	5795		18.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	155	5775		16.0	No	11.0	11.0	Yes

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11n	HT20	1.345	1.384	97.18%	1.03
802.11ac	VHT80	0.331	0.368	89.95%	1.11

Note(s):

Duty Cycle = (T on / period) * 100%

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Duty Cycle plots

802.11n HT20

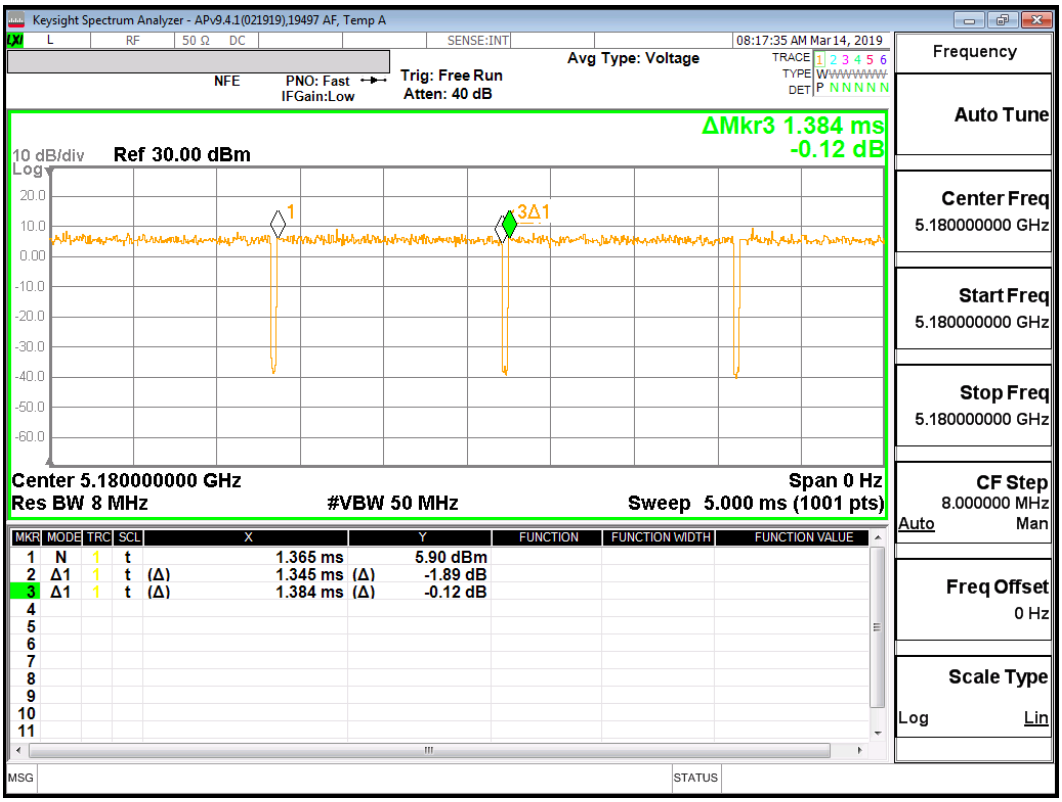

802.11ac VHT80

This report shall not be reproduced without the written approval of UL Verification Services Inc.

9.7. Bluetooth

Bluetooth Measured Results

SAR measurement is not required for the QPSK, 8PSK, and BLE. When the secondary mode is ≤ ¼ dB higher than the primary mode.

Band	Mode	Ch #	Freq. (MHz)	Maximum Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)
2.4	BDR GFSK	0	2402	12.0	12.0	Yes
		39	2441	12.0	12.0	
		78	2480	11.7	12.0	
	EDR, π/4 DQPSK	0	2402	10.3	12.0	No
		39	2441	9.8	12.0	
		78	2480	9.8	12.0	
	EDR, 8-DPSK	0	2402	10.1	12.0	No
		39	2441	9.5	12.0	
		78	2480	9.6	12.0	
	LE, GFSK	0	2402	0.5	2.0	No
		19	2440	0.5	2.0	
		39	2480	0.5	2.0	

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.89	3.752	77.05%	1.30

Note(s):

Duty Cycle = (T on / period) * 100%

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Duty Cycle plots

GFSK

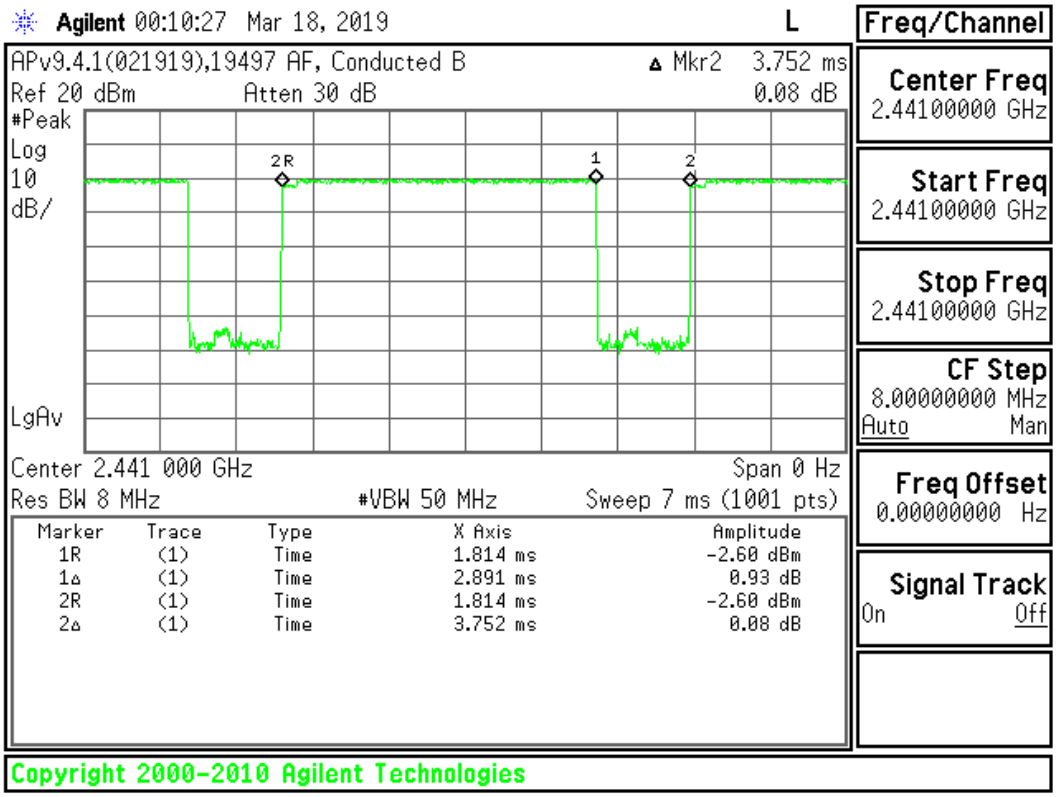

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN and Bluetooth = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.
When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). Initial Test Position SAR Test Reduction Procedure is outlined in KDB 248227 D01 §5.1.1. To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.1. GSM850

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	OFF	0	Left Touch	190	836.6	28.0	26.1	0.092	0.142	
				Left Tilt	190	836.6	28.0	26.1	0.044	0.068	
				Right Touch	190	836.6	28.0	26.1	0.101	**0.156**	1
				Right Tilt	190	836.6	28.0	26.1	0.046	0.071	
Body-worn	GPRS 4 Slots	OFF	15	Rear	190	836.6	28.0	26.1	0.150	**0.231**	2
				Front	190	836.6	28.0	26.1	0.076	0.117	
Hotspot	GPRS 4 Slots	OFF	10	Rear	190	836.6	28.0	26.1	0.362	**0.558**	3
				Front	190	836.6	28.0	26.1	0.081	0.125	
				Edge 2	190	836.6	28.0	26.1	0.114	0.176	
				Edge 3	190	836.6	28.0	26.1	0.121	0.187	
				Edge 4	190	836.6	28.0	26.1	0.032	0.049	

10.2. GSM1900

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	OFF	0	Left Touch	661	1880.0	25.5	24.8	0.060	0.071	
				Left Tilt	661	1880.0	25.5	24.8	0.048	0.057	
				Right Touch	661	1880.0	25.5	24.8	0.083	**0.098**	4
				Right Tilt	661	1880.0	25.5	24.8	0.038	0.045	
Body-worn	GPRS 4 Slots	OFF	15	Rear	661	1880.0	25.5	24.8	0.118	**0.139**	5
				Front	661	1880.0	25.5	24.8	0.076	0.090	
Hotspot	GPRS 4 Slots	ON	10	Rear	661	1880.0	23.5	22.8	0.113	**0.133**	6
				Front	661	1880.0	23.5	22.8	0.084	0.099	
				Edge 2	661	1880.0	23.5	22.8	0.057	0.067	
				Edge 3	661	1880.0	23.5	22.8	0.085	0.100	
				Edge 4	661	1880.0	23.5	22.8	0.026	0.031	

Note(s):

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Product Specific 10g SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.3. W-CDMA Band II

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC	OFF	0	Left Touch	9400	1880.0	24.5	24.0	0.134	0.150	
				Left Tilt	9400	1880.0	24.5	24.0	0.117	0.131	
				Right Touch	9400	1880.0	24.5	24.0	0.198	**0.222**	7
				Right Tilt	9400	1880.0	24.5	24.0	0.087	0.098	
Body-worn	Rel. 99 RMC	OFF	15	Rear	9400	1880.0	24.5	24.0	0.261	**0.293**	8
				Front	9400	1880.0	24.5	24.0	0.135	0.151	
Hotspot	Rel. 99 RMC	ON	10	Rear	9400	1880.0	22.5	22.4	0.437	0.447	
				Front	9400	1880.0	22.5	22.4	0.347	0.355	
				Edge 2	9400	1880.0	22.5	22.4	0.159	0.163	
				Edge 3	9400	1880.0	22.5	22.4	0.514	**0.526**	9
				Edge 4	9400	1880.0	22.5	22.4	0.285	0.292	

Note(s):
Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Product Specific 10g SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC	OFF	0	Left Touch	1413	1732.6	24.5	24.4	0.130	**0.132**	10
				Left Tilt	1413	1732.6	24.5	24.4	0.063	0.064	
				Right Touch	1413	1732.6	24.5	24.4	0.088	0.089	
				Right Tilt	1413	1732.6	24.5	24.4	0.071	0.072	
Body-worn	Rel. 99 RMC	OFF	15	Rear	1413	1732.6	24.5	24.4	0.126	0.128	
				Front	1413	1732.6	24.5	24.4	0.193	**0.196**	11
Hotspot	Rel. 99 RMC	ON	10	Rear	1413	1732.6	22.5	22.0	0.398	**0.447**	12
				Front	1413	1732.6	22.5	22.0	0.325	0.365	
				Edge 2	1413	1732.6	22.5	22.0	0.096	0.108	
				Edge 3	1413	1732.6	22.5	22.0	0.226	0.254	
				Edge 4	1413	1732.6	22.5	22.0	0.216	0.242	

Note(s):
Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Product Specific 10g SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.5. W-CDMA Band V

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC 12.2 kbps	OFF	0	Left Touch	4183	836.6	25.0	24.0	0.068	0.085	
				Left Tilt	4183	836.6	25.0	24.0	0.037	0.047	
				Right Touch	4183	836.6	25.0	24.0	0.087	**0.110**	13
				Right Tilt	4183	836.6	25.0	24.0	0.037	0.046	
Body-worn	Rel 99 RMC 12.2 kbps	OFF	15	Rear	4183	836.6	25.0	24.0	0.147	**0.185**	14
				Front	4183	836.6	25.0	24.0	0.057	0.072	
Hotspot	Rel 99 RMC 12.2 kbps	OFF	10	Rear	4183	836.6	25.0	24.0	0.306	**0.385**	15
				Front	4183	836.6	25.0	24.0	0.065	0.082	
				Edge 2	4183	836.6	25.0	24.0	0.091	0.115	
				Edge 3	4183	836.6	25.0	24.0	0.103	0.130	
				Edge 4	4183	836.6	25.0	24.0	0.035	0.043	

10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	18900	1880.0	1	49	24.5	23.5	0.078	0.098	
							50	24	23.5	22.5	0.063	0.079	
				Left Tiilt	18900	1880.0	1	49	24.5	23.5	0.073	0.092	
							50	24	23.5	22.5	0.058	0.072	
				Right Touch	18900	1880.0	1	49	24.5	23.5	0.122	**0.154**	16
							50	24	23.5	22.5	0.097	0.121	
				Right Tilt	18900	1880.0	1	49	24.5	23.5	0.058	0.073	
							50	24	23.5	22.5	0.046	0.057	
Body-worn	QPSK	OFF	15	Rear	18900	1880.0	1	49	24.5	23.5	0.407	**0.514**	17
							50	24	23.5	22.5	0.322	0.402	
				Front	18900	1880.0	1	49	24.5	23.5	0.173	0.218	
							50	24	23.5	22.5	0.134	0.167	
Hotspot	QPSK	ON	10	Rear	18900	1880.0	1	49	22.5	22.0	0.551	0.618	
							50	24	22.5	22.0	0.561	**0.625**	18
				Front	18900	1880.0	1	49	22.5	22.0	0.364	0.408	
							50	24	22.5	22.0	0.290	0.323	
				Edge 2	18900	1880.0	1	49	22.5	22.0	0.137	0.154	
							50	24	22.5	22.0	0.106	0.118	
				Edge 3	18900	1880.0	1	49	22.5	22.0	0.500	0.561	
							50	24	22.5	22.0	0.396	0.441	
				Edge 4	18900	1880.0	1	49	22.5	22.0	0.250	0.281	
							50	24	22.5	22.0	0.197	0.220	

Note(s):

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Product Specific 10g SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.7. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-Off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20175	1732.5	1	0	24.5	23.8	0.066	0.077	
							50	0	23.5	22.8	0.054	0.063	
				Left Tilt	20175	1732.5	1	0	24.5	23.8	0.023	0.027	
							50	0	23.5	22.8	0.021	0.025	
				Right Touch	20175	1732.5	1	0	24.5	23.8	0.069	**0.080**	19
							50	0	23.5	22.8	0.057	0.067	
				Right Tilt	20175	1732.5	1	0	24.5	23.8	0.026	0.030	
							50	0	23.5	22.8	0.022	0.026	
Body & Hotspot	QPSK	OFF	15	Rear	20175	1732.5	1	0	24.5	23.8	0.072	0.084	
							50	0	23.5	22.8	0.075	0.088	
				Front	20175	1732.5	1	0	24.5	23.8	0.129	**0.150**	20
							50	0	23.5	22.8	0.103	0.121	
Hotspot	QPSK	ON	10	Rear	20175	1732.5	1	0	22.5	21.8	0.233	0.276	
							50	0	22.5	21.8	0.240	**0.283**	21
				Front	20175	1732.5	1	0	22.5	21.8	0.141	0.167	
							50	0	22.5	21.8	0.162	0.191	
				Edge 2	20175	1732.5	1	0	22.5	21.8	0.046	0.054	
							50	0	22.5	21.8	0.035	0.041	
				Edge 3	20175	1732.5	1	0	22.5	21.8	0.204	0.241	
							50	0	22.5	21.8	0.161	0.190	
				Edge 4	20175	1732.5	1	0	22.5	21.8	0.149	0.176	
							50	0	22.5	21.8	0.116	0.137	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20525	836.5	1	0	25.0	24.3	0.069	0.082	
							25	12	24.0	23.4	0.055	0.064	
				Left Tilt (15°)	20525	836.5	1	0	25.0	24.3	0.040	0.048	
							25	12	24.0	23.4	0.031	0.036	
				Right Touch	20525	836.5	1	0	25.0	24.3	0.082	**0.097**	22
							25	12	24.0	23.4	0.067	0.078	
				Right Tilt (15°)	20525	836.5	1	0	25.0	24.3	0.035	0.042	
							25	12	24.0	23.4	0.028	0.033	
Body-worn	QPSK	OFF	15	Rear	20525	836.5	1	0	25.0	24.3	0.118	**0.140**	23
							25	12	24.0	23.4	0.096	0.111	
				Front	20525	836.5	1	0	25.0	24.3	0.059	0.070	
							25	12	24.0	23.4	0.048	0.055	
Hotspot	QPSK	OFF	10	Rear	20525	836.5	1	0	25.0	24.3	0.244	**0.290**	24
							25	12	24.0	23.4	0.208	0.242	
				Front	20525	836.5	1	0	25.0	24.3	0.059	0.070	
							25	12	24.0	23.4	0.048	0.056	
				Edge 2	20525	836.5	1	0	25.0	24.3	0.124	0.147	
							25	12	24.0	23.4	0.106	0.123	
				Edge 3	20525	836.5	1	0	25.0	24.3	0.128	0.152	
							25	12	24.0	23.4	0.112	0.130	
				Edge 4	20525	836.5	1	0	25.0	24.3	0.044	0.052	
							25	12	24.0	23.4	0.037	0.043	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.9. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23095	707.5	1	25	25.0	24.2	0.050	0.060	
							25	12	24.0	23.2	0.040	0.048	
				Left Tilt (15°)	23095	707.5	1	25	25.0	24.2	0.028	0.034	
							25	12	24.0	23.2	0.022	0.026	
				Right Touch	23095	707.5	1	25	25.0	24.2	0.052	**0.063**	25
							25	12	24.0	23.2	0.042	0.050	
				Right Tilt (15°)	23095	707.5	1	25	25.0	24.2	0.027	0.032	
							25	12	24.0	23.2	0.021	0.025	
Body-worn	QPSK	OFF	15	Rear	23095	707.5	1	25	25.0	24.2	0.171	**0.206**	26
							25	12	24.0	23.2	0.137	0.165	
				Front	23095	707.5	1	25	25.0	24.2	0.087	0.105	
							25	12	24.0	23.2	0.071	0.085	
Hotspot	QPSK	OFF	10	Rear	23095	707.5	1	25	25.0	24.2	0.177	**0.213**	27
							25	12	24.0	23.2	0.143	0.172	
				Front	23095	707.5	1	25	25.0	24.2	0.070	0.084	
							25	12	24.0	23.2	0.056	0.067	
				Edge 2	23095	707.5	1	25	25.0	24.2	0.169	0.203	
							25	12	24.0	23.2	0.136	0.164	
				Edge 3	23095	707.5	1	25	25.0	24.2	0.022	0.027	
							25	12	24.0	23.2	0.018	0.021	
				Edge 4	23095	707.5	1	25	25.0	24.2	0.092	0.110	
							25	12	24.0	23.2	0.074	0.088	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.10. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23230	782.0	1	25	25.0	24.4	0.103	0.118	
							25	0	24.0	23.2	0.078	0.094	
				Left Tilt (15°)	23230	782.0	1	25	25.0	24.4	0.063	0.072	
							25	0	24.0	23.2	0.047	0.057	
				Right Touch	23230	782.0	1	25	25.0	24.4	0.111	**0.127**	28
							25	0	24.0	23.2	0.094	0.113	
				Right Tilt (15°)	23230	782.0	1	25	25.0	24.4	0.060	0.069	
							25	0	24.0	23.2	0.044	0.053	
Body-worn	QPSK	OFF	15	Rear	23230	782.0	1	25	25.0	24.4	0.228	**0.262**	29
							25	0	24.0	23.2	0.169	0.203	
				Front	23230	782.0	1	25	25.0	24.4	0.132	0.152	
							25	0	24.0	23.2	0.100	0.120	
Hotspot	QPSK	OFF	10	Rear	23230	782.0	1	25	25.0	24.4	0.314	**0.361**	30
							25	0	24.0	23.2	0.268	0.322	
				Front	23230	782.0	1	25	25.0	24.4	0.122	0.140	
							25	0	24.0	23.2	0.092	0.111	
				Edge 2	23230	782.0	1	25	25.0	24.4	0.195	0.224	
							25	0	24.0	23.2	0.149	0.179	
				Edge 3	23230	782.0	1	25	25.0	24.4	0.111	0.127	
							25	0	24.0	23.2	0.080	0.096	
				Edge 4	23230	782.0	1	25	25.0	24.4	0.069	0.080	
							25	0	24.0	23.2	0.052	0.063	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.11. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	40620	2593.0	1	0	24.0	23.6	0.106	0.116	
							50	0	23.0	22.5	0.080	0.090	
				Left Tilt	40620	2593.0	1	0	24.0	23.6	0.129	0.141	
							50	0	23.0	22.5	0.098	0.110	
				Right Touch	40620	2593.0	1	0	24.0	23.6	0.298	**0.327**	31
							50	0	23.0	22.5	0.237	0.266	
				Right Tilt	40620	2593.0	1	0	24.0	23.6	0.149	0.163	
							50	0	23.0	22.5	0.114	0.128	
Body-worn	QPSK	OFF	15	Rear	40620	2593.0	1	0	24.0	23.6	0.142	**0.156**	32
							50	0	23.0	22.5	0.108	0.121	
				Front	40620	2593.0	1	0	24.0	23.6	0.045	0.049	
							50	0	23.0	22.5	0.034	0.038	
Hotspot	QPSK	OFF	10	Rear	40620	2593.0	1	0	24.0	23.6	0.198	**0.217**	33
							50	0	23.0	22.5	0.191	0.214	
				Front	40620	2593.0	1	0	24.0	23.6	0.083	0.091	
							50	0	23.0	22.5	0.064	0.072	
				Edge 1	40620	2593.0	1	0	24.0	23.6	0.032	0.035	
							50	0	23.0	22.5	0.030	0.033	
				Edge 4	40620	2593.0	1	0	24.0	23.6	0.172	0.189	
							50	0	23.0	22.5	0.131	0.147	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.12. LTE Band 66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-Off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offest	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	132322	1745.0	1	49	24.0	23.1	0.115	**0.141**	34
							50	24	23.0	22.1	0.090	0.111	
				Left Tilt	132322	1745.0	1	49	24.0	23.1	0.054	0.066	
							50	24	23.0	22.1	0.043	0.053	
				Right Touch	132322	1745.0	1	49	24.0	23.1	0.095	0.117	
							50	24	23.0	22.1	0.076	0.094	
				Right Tilt	132322	1745.0	1	49	24.0	23.1	0.059	0.073	
							50	24	23.0	22.1	0.049	0.061	
Body-worn	QPSK	OFF	15	Rear	132322	1745.0	1	49	24.0	23.1	0.214	**0.263**	35
							50	24	23.0	22.1	0.121	0.150	
				Front	132322	1745.0	1	49	24.0	23.1	0.163	0.201	
							50	24	23.0	22.1	0.130	0.161	
Hotspot	QPSK	ON	10	Rear	132322	1745.0	1	49	22.5	21.6	0.262	0.322	
							50	0	22.5	21.7	0.269	**0.323**	36
				Front	132322	1745.0	1	49	22.5	21.6	0.245	0.301	
							50	0	22.5	21.7	0.195	0.234	
				Edge 2	132322	1745.0	1	49	22.5	21.6	0.079	0.097	
							50	0	22.5	21.7	0.061	0.073	
				Edge 3	132322	1745.0	1	49	22.5	21.6	0.235	0.289	
							50	0	22.5	21.7	0.188	0.226	
				Edge 4	132322	1745.0	1	49	22.5	21.6	0.183	0.225	
							50	0	22.5	21.7	0.144	0.173	

Note(s):

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Product Specific 10g SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.13. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.
SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11b 1 Mbps	ON	0	Left Touch	6	2437	98.64%	14.0	14.0			
				Left Tilt	6	2437	98.64%	14.0	14.0	0.051	**0.052**	37
				Right Touch	6	2437	98.64%	14.0	14.0			
				Right Tilt	6	2437	98.64%	14.0	14.0			
Body-worn	802.11b 1 Mbps	OFF	15	Rear	6	2437	98.64%	19.0	19.0	0.063	**0.064**	39
				Front	6	2437	98.64%	19.0	19.0			
Hotspot	802.11b 1 Mbps	OFF	10	Rear	6	2437	98.64%	19.0	19.0	0.169	**0.171**	39
				Front	6	2437	98.64%	19.0	19.0			
				Edge 1	6	2437	98.64%	19.0	19.0			
				Edge 2	6	2437	98.64%	19.0	19.0			

10.14. Wi-Fi (U-NII Band)

UNII-1 & 2A

When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest *reported* SAR for UNII band 2A is

- ≤ 1.2 W/kg, SAR is not required for UNII band I
- > 1.2 W/kg, both bands should be tested independently for SAR.

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11ac (VHT80)	ON	0	Left Touch	58	5290	89.95%	11.0	11.0			
				Left Tilt	58	5290	89.95%	11.0	11.0	0.266	**0.296**	40
				Right Touch	58	5290	89.95%	11.0	11.0			
				Right Tilt	58	5290	89.95%	11.0	11.0			
Body-worn	802.11n HT20	OFF	15	Rear	60	5300	97.18%	19.0	19.0	0.559	**0.575**	41
				Front	60	5300	97.18%	19.0	19.0	0.111	0.114	
RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Product Specific 10g	802.11n HT20	OFF	0	Rear	60	5300	97.18%	19.0	19.0	1.860	**1.914**	42
				Front	60	5300	97.18%	19.0	19.0			
				Edge 1	60	5300	97.18%	19.0	19.0	1.190	1.225	
				Edge 2	60	5300	97.18%	19.0	19.0			

Note(s):

1. Highest Reported 1-g SAR for U-NII 2A mode is < 1.2 W/kg, therefore SAR testing is not required for U-NII 1 mode.
2. Highest Reported 10-g SAR for U-NII 2A mode is < 3.0 W/kg, therefor SAR testing is not required for U-NII 1 mode.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

UNII-2C

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11ac (VHT80)	ON	0	Left Touch	138	5690	89.95%	11.0	11.0			
				Left Tilt	138	5690	89.95%	11.0	11.0			
				Right Touch	138	5690	89.95%	11.0	11.0			
				Right Tilt	138	5690	89.95%	11.0	11.0	0.089	**0.099**	43
Body-worn	802.11n HT20	OFF	15	Rear	124	5620	97.18%	19.0	19.0	0.681	**0.701**	44
				Front	124	5620	97.18%	19.0	19.0	0.149	0.153	
RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Product Specific 10g	802.11n HT20	OFF	0	Rear	124	5620	97.18%	19.0	19.0	1.840	**1.893**	45
				Front	124	5620	97.18%	19.0	19.0			
				Edge 1	124	5620	97.18%	19.0	19.0	1.320	1.358	
				Edge 2	124	5620	97.18%	19.0	19.0			

UNII-3

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11b 1 Mbps	ON	0	Left Touch	155	5775	89.95%	11.0	11.0			
				Left Tilt	155	5775	89.95%	11.0	11.0	0.076	**0.084**	46
				Right Touch	155	5775	89.95%	11.0	11.0			
				Right Tilt	155	5775	89.95%	11.0	11.0			
Body-worn	802.11b 1 Mbps	OFF	15	Rear	157	5785	97.18%	19.0	19.0	0.473	**0.487**	47
				Front	157	5785	97.18%	19.0	19.0	0.079	0.081	
Hotspot	802.11b 1 Mbps	OFF	10	Rear	157	5785	97.18%	19.0	19.0	0.721	**0.742**	48
				Front	157	5785	97.18%	19.0	19.0			
				Edge 1	157	5785	97.18%	19.0	19.0	0.570	0.587	
				Edge 2	157	5785	97.18%	19.0	19.0			

This report shall not be reproduced without the written approval of UL Verification Services Inc.

10.15. Bluetooth

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up Limit	Meas.	Meas.	Scaled	
Head	GFSK	0	Left Touch	39	2441	12.0	12.0	0.008	0.008	
			Left Tilt	39	2441	12.0	12.0	0.013	**0.013**	49
			Right Touch	39	2441	12.0	12.0	0.006	0.006	
			Right Tilt	39	2441	12.0	12.0	0.009	0.009	
Body-worn	GFSK	15	Rear	39	2441	12.0	12.0	0.005	**0.005**	50
			Front	39	2441	12.0	12.0	<0.001	<0.001	
Hotspot	GFSK	10	Rear	39	2441	12.0	12.0	0.017	**0.017**	51
			Front	39	2441	12.0	12.0	<0.001	<0.001	
			Edge 1	39	2441	12.0	12.0	0.003	0.003	
			Edge 2	39	2441	12.0	12.0	<0.001	<0.001	

This report shall not be reproduced without the written approval of UL Verification Services Inc.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Note(s):

Repeated measurements are not required since the original highest measured SAR is <0.8 W/kg(1-g) or 2 W/kg (10-g) .

This report shall not be reproduced without the written approval of UL Verification Services Inc.

12. Simultaneous Transmission Conditions

RF Exposure Condition	Item	Capable Transmit Configurations		
Head Body-worn Hotspot	1	GSM(Voice)	+	DTS
	2	GSM(Voice)	+	U-NII
	3	GSM(Voice)	+	BT
	4	GSM(GPRS/EDGE)	+	DTS
	5	GSM(GPRS/EDGE)	+	U-NII
	6	GSM(GPRS/EDGE)	+	BT
	7	W-CDMA	+	DTS
	8	W-CDMA	+	U-NII
	9	W-CDMA	+	BT
	10	LTE	+	DTS
	11	LTE	+	U-NII
	12	LTE	+	BT

Notes:
1. DTS & UNII (5.8GHz) supports Hotspot.
2. GPRS/EDGE, W-CDMA, and LTE support Hotspot.
3. VoIP is supported in GPRS/EDGE, W-CDMA, and LTE.
4. DTS Radio cannot transmit simultaneously with Bluetooth Radio.
5. U-NII Radio cannot transmit simultaneously with Bluetooth Radio.

Note(s):
Product Specific 10g SAR does not require simultaneous transmission analysis.

12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

12.1.1. Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.2. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Standalone SAR (W/kg)				∑ 1-g SAR (W/kg)		
	1	2	3	4	1+2	1+3	1+4
	WWAN	Wi-Fi 2.4G	Wi-Fi 5G	BT			
Head	0.327	0.052	0.296	0.013	**0.379**	**0.623**	**0.340**
Body-worn	0.514	0.064	0.701	0.005	**0.578**	**1.215**	**0.519**
Hotspot	0.625	0.171	0.742	0.017	**0.796**	**1.367**	**0.642**

Conclusion:
Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

This report shall not be reproduced without the written approval of UL Verification Services Inc.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT

This report shall not be reproduced without the written approval of UL Verification Services Inc.