



## HAC T-COIL SIGNAL TEST REPORT

FCC 47 CFR § 20.19  
ANSI C63.19-2011  
CTIA Test Plan for Hearing Aid Compatibility Ver.3.1.1

*For*

GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

MODEL NUMBER : SM-A716V

FCC ID: A3LSMA716V

REPORT NUMBER: 4789424849-S3V3

ISSUE DATE: 6/30/2020

*Prepared for*  
SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

*Prepared by*  
UL Korea, Ltd.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433



Testing Laboratory

TL-637




**Revision History**

| Rev. | Date      | Revisions                          | Revised By  |
|------|-----------|------------------------------------|-------------|
| V1   | 5/18/2020 | Initial Issue                      |             |
| V2   | 6/16/2020 | Updated Sec.8.1 HAC Summary Table. | Sanghwa Lee |
| V3   | 6/30/2020 | Updated Sec.8.1 HAC Summary Table. | Sanghwa Lee |

## Table of Contents

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. Attestation of Test Results.....</b>             | <b>4</b>  |
| <b>2. Test Methodology .....</b>                       | <b>5</b>  |
| <b>3. Facilities and Accreditation .....</b>           | <b>5</b>  |
| <b>4. Calibration and Uncertainty .....</b>            | <b>5</b>  |
| 4.1. Measuring Instrument Calibration.....             | 5         |
| 4.2. Measurement Uncertainty .....                     | 6         |
| 4.3. Decision Rule.....                                | 6         |
| <b>5. Test Procedures for all Technologies .....</b>   | <b>7</b>  |
| 5.1. General Procedures C63.19-2011, Section 7 .....   | 7         |
| 5.2. VoWiFi – For PAG REUSE .....                      | 8         |
| 5.3. Over the Top (OTT)– For PAG REUSE.....            | 9         |
| <b>6. Audio Level and Gain Measurements.....</b>       | <b>11</b> |
| 6.1. GSM / W-CDMA.....                                 | 11        |
| 6.2. VoLTE.....                                        | 11        |
| 6.3. VoWi-Fi.....                                      | 12        |
| 6.4. Over the Top (OTT) – For PAG REUSE.....           | 12        |
| <b>7. T-coil Measurement Criteria.....</b>             | <b>13</b> |
| 7.1. Frequency Response .....                          | 13        |
| 7.2. Signal to Noise.....                              | 14        |
| <b>8. Device Under Test.....</b>                       | <b>15</b> |
| 8.1. Air Interfaces and Operating Mode.....            | 15        |
| <b>9. HAC (T-coil) Test Results .....</b>              | <b>16</b> |
| 9.1. Antenna Investigation.....                        | 16        |
| 9.2. GSM/WCDMA/VoLTE Codec Investigation .....         | 16        |
| 9.3. GSM/WCDMA/VoLTE Air Interface Investigation ..... | 18        |
| 9.4. VoWi-Fi Codec Investigation .....                 | 21        |
| 9.5. VoWi-Fi Air Interface Investigation .....         | 21        |
| 9.6. OTT Codec Investigation.....                      | 24        |
| 9.7. OTT Air Interface Investigation.....              | 25        |
| 9.8. OTT NR Air Interface investigation.....           | 26        |
| 9.9. HAC (T-coil) Test Results.....                    | 28        |
| 9.10. Worst Case T-Coil Test Plot.....                 | 30        |
| <b>Appendix .....</b>                                  | <b>31</b> |
| 4789424849-S3_T-coil App A: Setup Photo .....          | 31        |
| 4789424849-S3_T-coil App B: Test Plots.....            | 31        |
| 4789424849-S3_T-coil App C: Probe Certificates .....   | 31        |

## 1. Attestation of Test Results

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Applicant Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | SAMSUNG ELECTRONICS CO.,LTD.                                                                     |
| FCC ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A3LSMA716V                                                                                       |
| Model Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | SM-A716V                                                                                         |
| Applicable Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | FCC 47 CFR § 20.19<br>ANSI C63.19-2011<br>CTIA Test Plan for Hearing Aid Compatibility Ver.3.1.1 |
| HAC Rating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | T3                                                                                               |
| Date Tested                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4/14/2020 to 5/12/2020                                                                           |
| Test Results                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Pass                                                                                             |
| <p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p> |                                                                                                  |
| Approved & Released By:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Prepared By:                                                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |
| Justin Park<br>Operations Leader<br>UL Korea, Ltd. Suwon Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Sanghwa Lee<br>Senior Laboratory Technician<br>UL Korea, Ltd. Suwon Laboratory                   |

## 2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05

KDB 285076 D02 T-Coil testing for CMRS IP v03

KDB 285076 D03 HAC FAQ v01

TCB workshop updates

CTIA Test Plan for Hearing Aid Compatibility Ver.3.1.1

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

|                  |
|------------------|
| Suwon            |
| SAR 2 Room (HAC) |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>

## 4. Calibration and Uncertainty

### 4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

| Name of Equipment            | Manufacturer  | Type/Model                               | Serial No.    | Cal. Due Date |
|------------------------------|---------------|------------------------------------------|---------------|---------------|
| ABM Probe                    | SPEAG         | AM1DV3                                   | 3140          | 09-16-2020    |
| Data Acquisition Electronics | SPEAG         | DAE4                                     | 1447          | 03-20-2021    |
| Radio Communication Tester   | R & S         | CMW 500                                  | 150314        | 08-08-2020    |
| Wireless Test Platform       | Keysight      | E7515B                                   | MY57510596    | 02-05-2021    |
| Support Device               | Samsung       | SM-G770U1                                | R38MC0CE4ZN   | N/A           |
| DAC                          | Sound Devices | USBPre 2                                 | HB1218172005  | N/A           |
| AP                           | Cisco         | Air-CAP3702I-A-K9                        | FTX1902S5JZ   | N/A           |
| Series Wireless Controller   | Cisco         | WLAN 2500 Series Controller              | PSZ173000ZG   | N/A           |
| Switch                       | Netgear       | ProSafe 5 Port Gigabit Switch<br>GS105v5 | 3TL1865A1173B | N/A           |

## 4.2. Measurement Uncertainty

### Measurement Uncertainty for Audio Band Magnetic Measurement

#### Measurement Uncertainty for Audio Band Magnetic Measurement

| Error Description                                                   | Explanasion | Uncertainty value (±%) | Probe Dist. | Divisor | (Ci) ABM1 | (Ci) ABM2 | Std. Unc.(±%) |      |
|---------------------------------------------------------------------|-------------|------------------------|-------------|---------|-----------|-----------|---------------|------|
|                                                                     |             |                        |             |         |           |           | ABM1          | ABM2 |
| Probe Sensitivity                                                   |             |                        |             |         |           |           |               |      |
| Reference Level                                                     | B.1         | 3.0                    | Normal      | 1       | 1         | 1         | 3.0           | 3.0  |
| AMCC Geometry                                                       | B.2         | 0.4                    | Rectangular | 1.732   | 1         | 1         | 0.2           | 0.2  |
| AMCC Current                                                        | B.3         | 1.0                    | Rectangular | 1.732   | 1         | 1         | 0.6           | 0.6  |
| Probe Positioning during Calibration                                | B.4         | 0.1                    | Rectangular | 1.732   | 1         | 1         | 0.1           | 0.1  |
| Noise Contribution                                                  | B.5         | 0.7                    | Rectangular | 1.732   | 0.0143    | 1         | 0.0           | 0.4  |
| Frequency Slope                                                     | B.6         | 5.9                    | Rectangular | 1.732   | 0.1       | 1         | 0.3           | 3.41 |
| Probe System                                                        |             |                        |             |         |           |           |               |      |
| Repeatability / Drift                                               | B.7         | 1.0                    | Rectangular | 1.732   | 1         | 1         | 0.6           | 0.6  |
| Linearity / Dynamic Range                                           | B.8         | 0.6                    | Rectangular | 1.732   | 1         | 1         | 0.3           | 0.3  |
| Acoustic Noise                                                      | B.9         | 1.0                    | Rectangular | 1.732   | 0.1       | 1         | 0.1           | 0.6  |
| Probe Angle                                                         | B.10        | 2.3                    | Rectangular | 1.732   | 1         | 1         | 1.3           | 1.3  |
| Spectral Processing                                                 | B.11        | 0.9                    | Rectangular | 1.732   | 1         | 1         | 0.5           | 0.5  |
| Integration Time                                                    | B.12        | 0.6                    | Normal      | 1       | 1         | 5         | 0.6           | 3.0  |
| Field Disturbation                                                  | B.13        | 0.2                    | Rectangular | 1.732   | 1         | 1         | 0.1           | 0.1  |
| Test Signal                                                         |             |                        |             |         |           |           |               |      |
| Ref. Signal Spectral Response                                       | B.14        | 0.6                    | Rectangular | 1.732   | 0         | 1         | 0.0           | 0.3  |
| Positioning                                                         |             |                        |             |         |           |           |               |      |
| Probe Positioning                                                   | B.15        | 1.9                    | Rectangular | 1.732   | 1         | 1         | 1.1           | 1.1  |
| Phantom Thickness                                                   | B.16        | 0.9                    | Rectangular | 1.732   | 1         | 1         | 0.5           | 0.5  |
| DUT Positioning                                                     | B.17        | 1.9                    | Rectangular | 1.732   | 1         | 1         | 1.1           | 1.1  |
| External Contributions                                              |             |                        |             |         |           |           |               |      |
| RF interference                                                     | B.18        | 0.0                    | Rectangular | 1.732   | 1         | 0.3       | 0.0           | 0.0  |
| Test Signal Varistion                                               | B.19        | 2.0                    | Rectangular | 1.732   | 1         | 1         | 1.2           | 1.2  |
| Combined Std, Uncertainty (ABM Field)                               |             |                        |             |         |           |           | 4.0           | 6.1  |
| Expanded Std. Uncertainty                                           |             |                        |             |         |           |           | 8.1           | 12.2 |
| Notes for table                                                     |             |                        |             |         |           |           |               |      |
| 1. Ci - is te sensitivity coefficient                               |             |                        |             |         |           |           |               |      |
| 2. Expanded Std. Uncertainty, Coverage Factor = 2, > 95% Confidence |             |                        |             |         |           |           |               |      |

## 4.3. Decision Rule

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

## 5. Test Procedures for all Technologies

### 5.1. General Procedures C63.19-2011, Section 7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1<sup>1</sup> and ABM2<sup>2</sup>. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.<sup>46</sup> The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.
- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.


Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

<sup>1</sup> **Audio Band Magnetic signal - desired (ABM1):** Measured quantity of the desired magnetic signal

<sup>2</sup> **Audio Band Magnetic signal - undesired (ABM2):** Measured quantity of the undesired magnetic signal, such as interference from battery current and similar non-signal elements.

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

- f. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- g. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

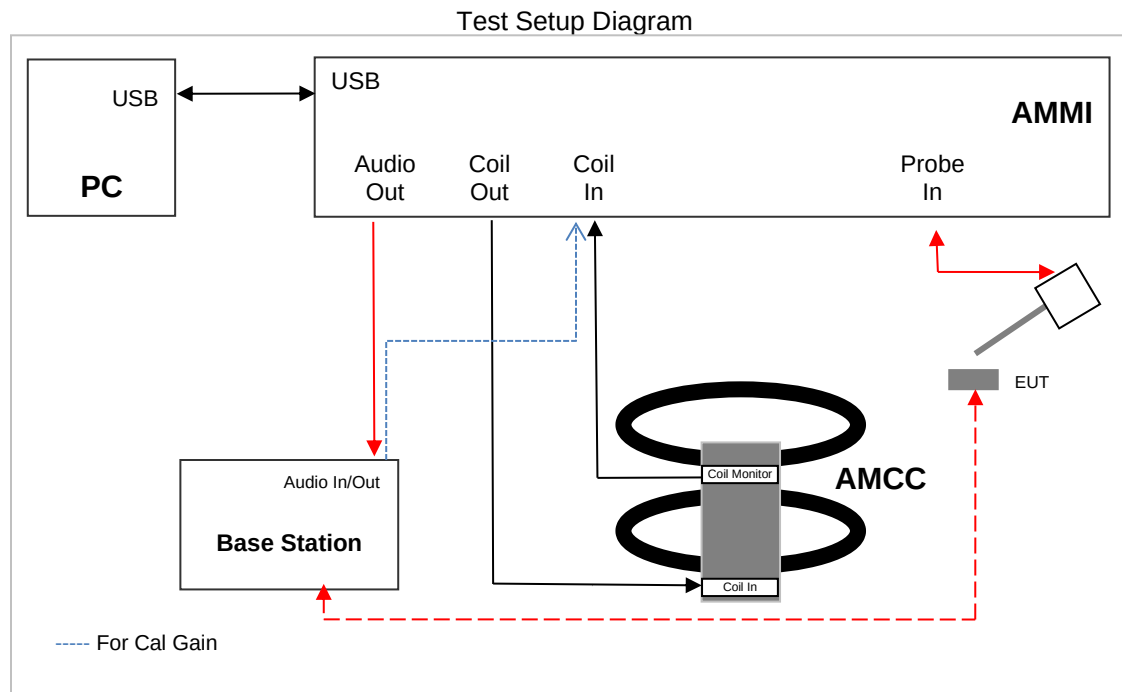

## 5.2. VoWiFi – For PAG REUSE

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWiFi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over WI-FI via the internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.

The set up for VoWiFi uses the Base station as described in section 5.15.1 with the exception that the reference audio level is set at -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to section 6.3).


An investigation was performed to determine worst case codec, bit rate and air interface configuration (refer to section 9).

### 5.3. Over the Top (OTT)– For PAG REUSE

This device supports VoIP via a preinstalled application that uses the **Google Duo service** and related codec “**OPUS**”. VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. This support device includes test software that allows the codec bit rate for the IP call to be selected. The support device connects to the cloud-based Google Duo service via a Wi-Fi access point and router. The DUT connects to the VoIP service via a cellular air interface to the call box and an ethernet connection from call box to internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to section 9).

Test Setup configuration for EGPRS, HSUPA and LTE (OTT Calls)

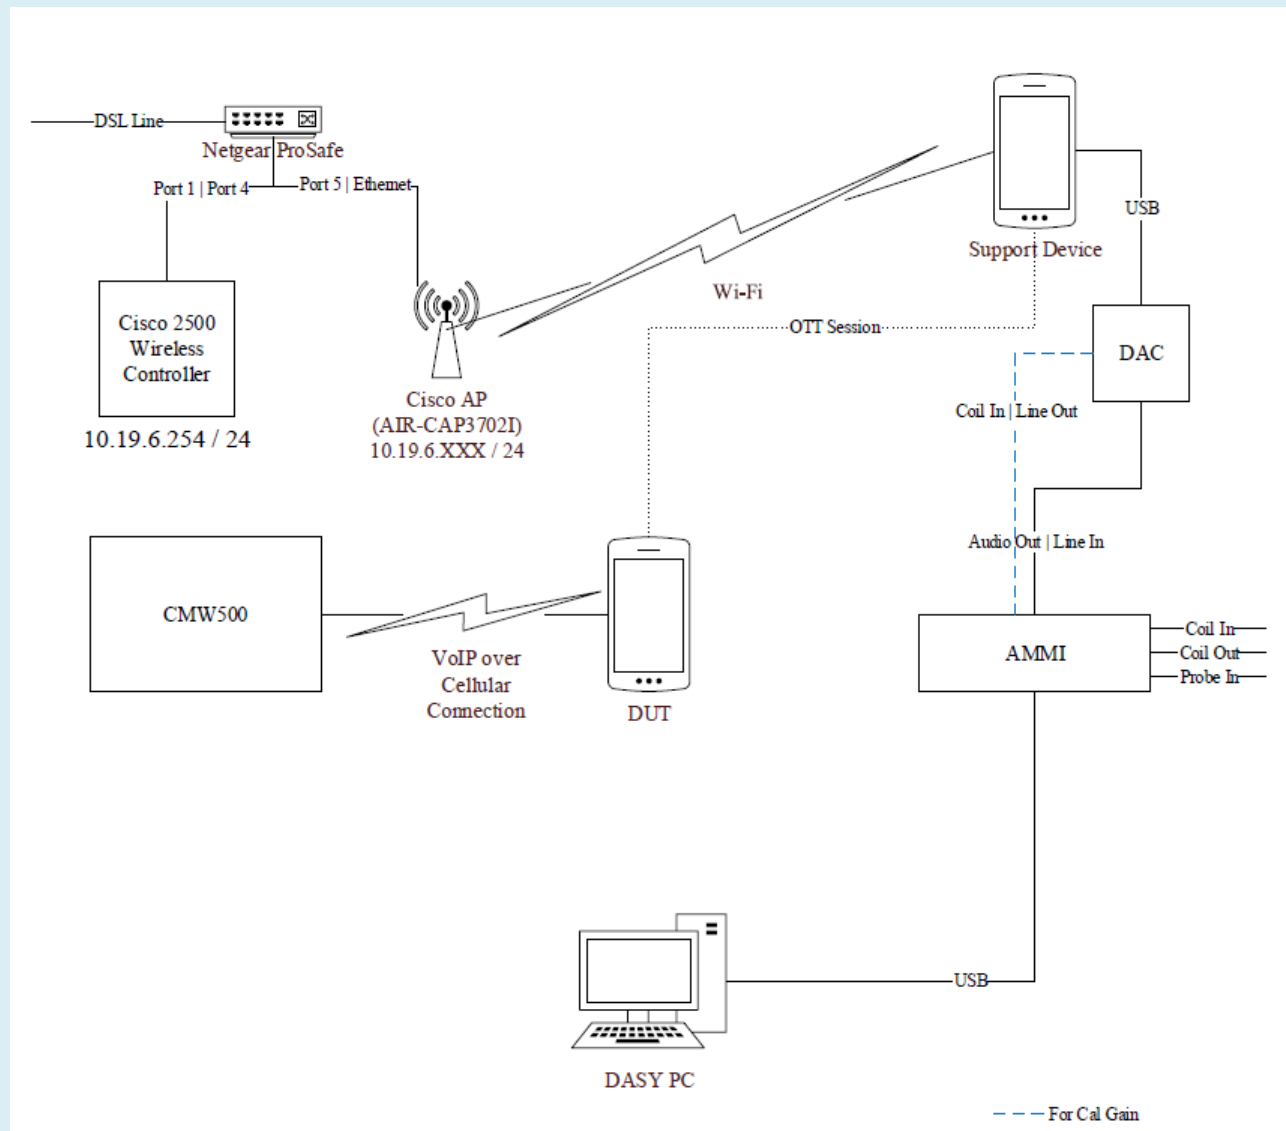

For the OTT call the calibrated audio card cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

As this test set up uses an external DAC between the AMMI's audio output and support device the appropriate gain factor for the OTT call has to be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

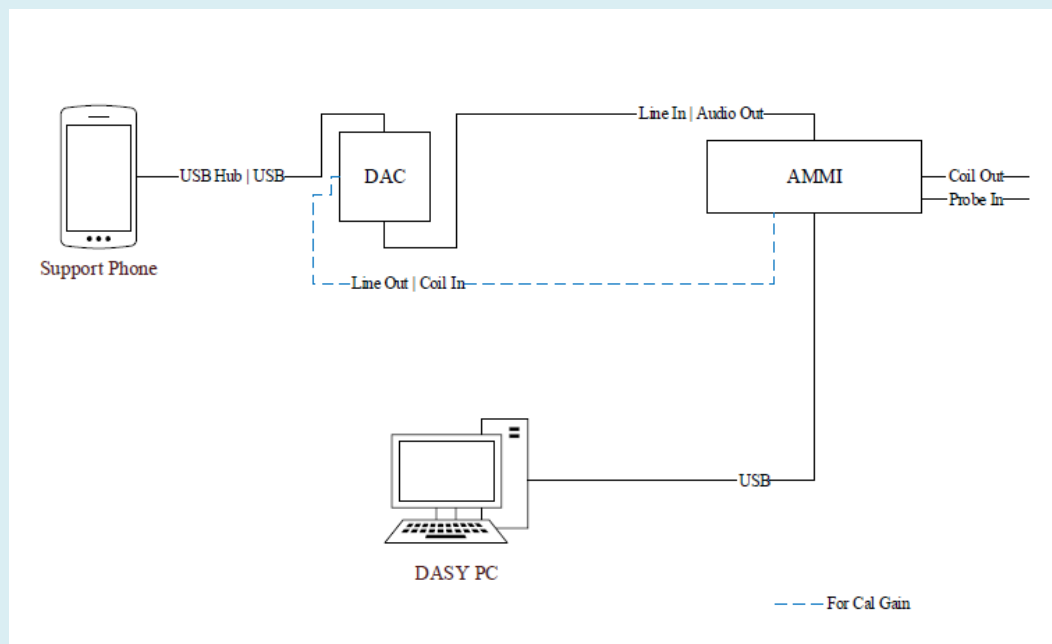

Using the metering function on the DAC, the DAC gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A). SPEAG's "TN-LK-05042018-C-T-Coil\_Levels" document steps E through H are then followed to determine the adjusted gain values as detailed in section 6.4 so that the reference level is set 23.14 dB below full scale, i.e. at -20dBm0.

## 6. Audio Level and Gain Measurements

### 6.1. GSM / W-CDMA

Refer to the below table for the gains used to measure GSM and W-CDMA.

| Signal Type       | Audio Level [dBm0] | Gain [dB] | Gain [linear] |
|-------------------|--------------------|-----------|---------------|
| Voice 1 kHz       | -16.00             | 27.73     | <b>24.35</b>  |
| Voice 300 - 3 kHz | -19.00             | 34.40     | <b>52.48</b>  |

### 6.2. VoLTE

Refer to the below table for the gains used to measure VoLTE.

The following software/firmware was used to simulate the VoLTE server for testing:

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.30 for LTE   | KS500        | LTE FDD R8 SIG BASIC  |
|                   | KS550        | LTE TDD R8 SIG BASIC  |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv4 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |

| Signal Type       | Audio Level [dBm0] | Gain [dB] | Gain [linear] |
|-------------------|--------------------|-----------|---------------|
| Voice 1 kHz       | -16.00             | 27.73     | <b>24.35</b>  |
| Voice 300 - 3 kHz | -19.00             | 34.40     | <b>52.48</b>  |

### 6.3. VoWi-Fi

Refer to the below table for the gains used to measure VoWi-Fi.

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.50 for WLAN  | KS650        | WLAN A/B/G SIG BASIC  |
|                   | KS651        | WLAN N SIG BASIC      |
|                   | KS656        | WLAN IEEE 802.11ac    |
|                   | KS657        | WLAN IEEE 802.11ax    |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv4 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |

| Signal Type       | Audio Level [dBm0] | Gain [dB] | Gain [linear] |
|-------------------|--------------------|-----------|---------------|
| Voice 1 kHz       | -20.00             | 23.73     | <b>15.36</b>  |
| Voice 300 - 3 kHz | -20.00             | 33.40     | <b>46.77</b>  |

### 6.4. Over the Top (OTT) – For PAG REUSE

For EDGE, HSPA, LTE, and Wi-Fi, the linear gain levels listed below were used. The results below are based on a reference input level of -20 dBm0.

To calibrate the DAC (refer section 5.2), three .wav audio files (sine wave, 1 kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.


| Signal Type       | Audio Level [dBm0] | Gain [dB] | Gain [linear] |
|-------------------|--------------------|-----------|---------------|
| Voice 1 kHz       | -20.00             | 26.02     | <b>20.00</b>  |
| Voice 300 - 3 kHz | -20.00             | 35.69     | <b>60.88</b>  |

## 7. T-coil Measurement Criteria

### 7.1. Frequency Response


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

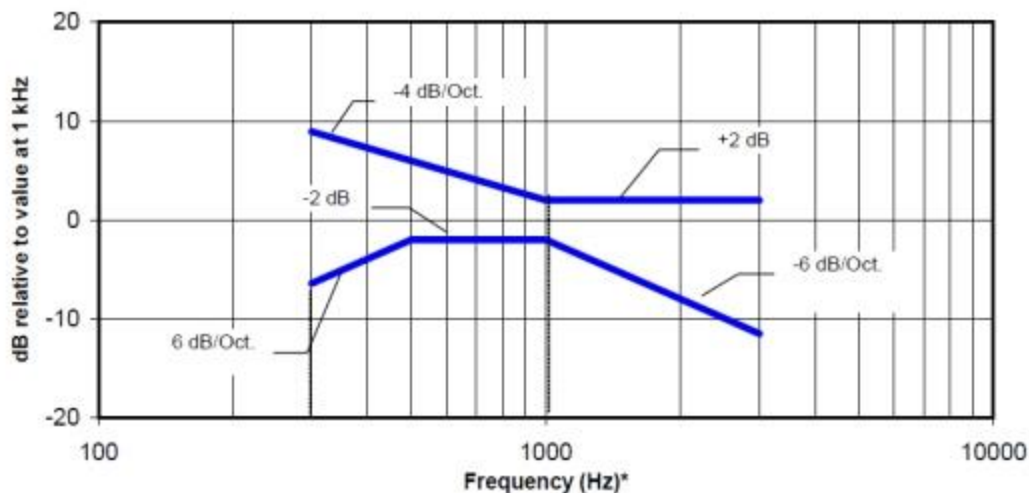

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.1—Magnetic field frequency response for WDs with field strength  $\leq -15$  dB (A/m) at 1 kHz**

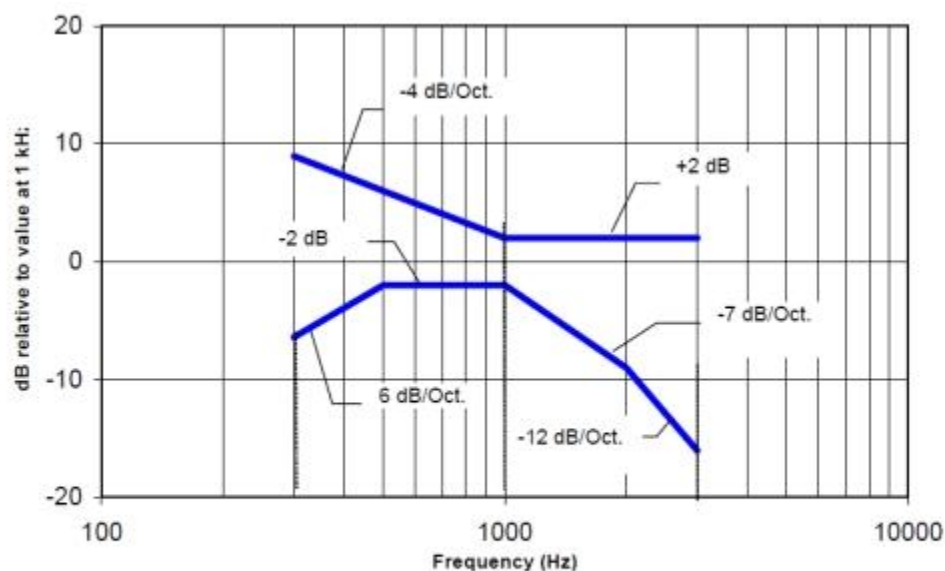

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

## 7.2. Signal to Noise


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

**Table 8.5—T-Coil signal-to-noise categories**

| Category    | Telephone parameters<br>WD signal quality<br>[(signal + noise)-to-noise ratio in decibels] |
|-------------|--------------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                              |
| Category T2 | 10 dB to 20 dB                                                                             |
| Category T3 | 20 dB to 30 dB                                                                             |
| Category T4 | >30 dB                                                                                     |

Measurement locations and reference plane to be used for the T-coil measurements

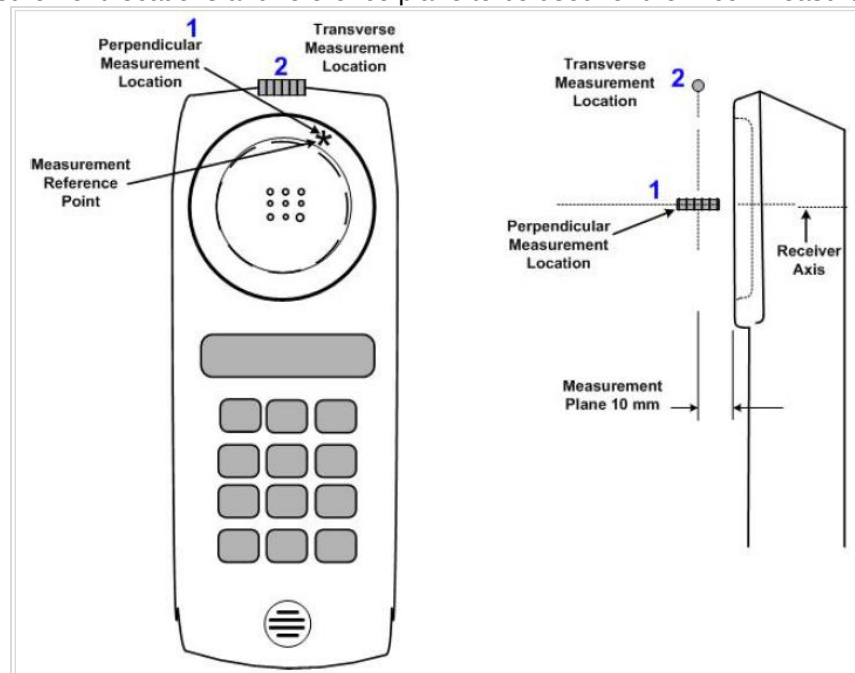

## 8. Device Under Test

| Normal operation        | Held to head                                                                                                                                                                                                                                                      |     |       |             |             |             |             |             |             |             |             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Back Cover              | The Back Cover is not removable                                                                                                                                                                                                                                   |     |       |             |             |             |             |             |             |             |             |
| Test sample information | <table> <tr> <th>S/N</th><th>Notes</th></tr> <tr> <td>R3CN20P1LJR</td><td>T-coil Test</td></tr> <tr> <td>R3CN20P1JBT</td><td>T-coil Test</td></tr> <tr> <td>R3CN20PIE6X</td><td>T-coil Test</td></tr> <tr> <td>R3CN20P1C0X</td><td>T-coil Test</td></tr> </table> | S/N | Notes | R3CN20P1LJR | T-coil Test | R3CN20P1JBT | T-coil Test | R3CN20PIE6X | T-coil Test | R3CN20P1C0X | T-coil Test |
| S/N                     | Notes                                                                                                                                                                                                                                                             |     |       |             |             |             |             |             |             |             |             |
| R3CN20P1LJR             | T-coil Test                                                                                                                                                                                                                                                       |     |       |             |             |             |             |             |             |             |             |
| R3CN20P1JBT             | T-coil Test                                                                                                                                                                                                                                                       |     |       |             |             |             |             |             |             |             |             |
| R3CN20PIE6X             | T-coil Test                                                                                                                                                                                                                                                       |     |       |             |             |             |             |             |             |             |             |
| R3CN20P1C0X             | T-coil Test                                                                                                                                                                                                                                                       |     |       |             |             |             |             |             |             |             |             |

### 8.1. Air Interfaces and Operating Mode

| Air Interface       | Bands (MHz)     | Type | C63.19 Tested               | Simultaneous Transmitter   | OTT Testing Required?<br>Name of Voice Service | Audio Codecs Evaluated                          |
|---------------------|-----------------|------|-----------------------------|----------------------------|------------------------------------------------|-------------------------------------------------|
| GSM                 | 850             | VO   | Yes                         | Wi-Fi and BT               | NA                                             | EFR                                             |
|                     | 1900            |      |                             |                            |                                                |                                                 |
|                     | GPRS/EDGE       | VD   | Yes                         | Wi-Fi and BT               | Yes <sup>3</sup><br>Google Duo <sup>2</sup>    | OPUS                                            |
| W-CDMA (UMTS)       | 850 (V)         | VO   | Yes                         | Wi-Fi and BT               | NA                                             | AMR-NB & AMR-WB                                 |
|                     | 1900 (II)       |      |                             |                            |                                                |                                                 |
|                     | HSPA            | VD   | Yes                         | Wi-Fi and BT               | Yes <sup>3</sup><br>Google Duo <sup>2</sup>    | OPUS                                            |
| LTE - FDD           | 700 (B12)       | VD   | Yes                         | Wi-Fi and BT               | Yes <sup>1, 3</sup><br>Google Duo <sup>2</sup> | VoLTE<br>AMR-NB, AMR-WB,<br>EVS<br>OTT<br>OPUS  |
|                     | 780 (B13)       |      |                             |                            |                                                |                                                 |
|                     | 850 (B5)        |      |                             |                            |                                                |                                                 |
|                     | 1700 (B4/66)    |      |                             |                            |                                                |                                                 |
|                     | 1900 (B2)       |      |                             |                            |                                                |                                                 |
|                     | 2600 (B7)       |      |                             |                            |                                                |                                                 |
| NR FR1 (Sub 6) FDD  | 850 (n5)        | VD   | VoNR No <sup>6</sup>        | Wi-Fi and BT               | Google Duo <sup>2, 5</sup>                     | VoNR Not Support <sup>6</sup>                   |
|                     | 1700 (n66)      |      | OTT Yes                     |                            |                                                | OTT<br>OPUS                                     |
|                     | 1900 (n2)       |      |                             |                            |                                                |                                                 |
| NR FR2 (mmWave) TDD | 28000 (n261)    | VD   | Not Tested <sup>4</sup>     | Wi-Fi and BT               | Not Tested <sup>4</sup>                        | Not Tested                                      |
|                     | 39000 (n260)    |      |                             |                            |                                                |                                                 |
| Wi-Fi               | 2450            | VD   | Yes <sup>2,3</sup> (VoWiFi) | WWAN and Wi-Fi 5 GHz       | Yes <sup>3</sup><br>Google Duo <sup>2</sup>    | VoWiFi<br>AMR-NB, AMR-WB,<br>EVS<br>OTT<br>OPUS |
|                     | 5200 (U-NII-1)  |      |                             | WWAN, Wi-Fi 2.4 GHz and BT |                                                |                                                 |
|                     | 5300 (U-NII-2A) |      |                             |                            |                                                |                                                 |
|                     | 5500 (U-NII-2C) |      |                             |                            |                                                |                                                 |
|                     | 5800 (U-NII-3)  |      |                             |                            |                                                |                                                 |
| BT                  | 2450            | DT   | NA                          | WWAN and Wi-Fi 5 GHz       | NA                                             | NA                                              |

#### Type

VO: Legacy Cellular Voice Service

DT: Digital Transport only (no voice)

VD: IP Voice Service over Digital Transport (CMRS and/or VoWiFi)

BT: Bluetooth

#### Note:

1. Ref Lev in accordance with the July 2012 VoLTE interpretation

2. Ref Lev -20 dBm0

3. **For PAG REUSE**

4. mmWave air interface is outside the scope of current C63.19 test procedures for CMRS and for OTT

5. 5GNR AMB1 measurements were not possible due to limitations with the call-box. T-Coil value calculated using the AMB2 measurement for 5GNR and AMB1 measurement for the corresponding LTE codec.

6. This device does not support VoNR.

## 9. HAC (T-coil) Test Results

### 9.1. Antenna Investigation

| Mode:                                  | Channel and Frequency | Bandwidth | Bandwidth / Modulation | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position        |
|----------------------------------------|-----------------------|-----------|------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| 802.11a<br>Codec : EVS SWB 24.4 kbit/s | CH.40<br>5200 MHz     | 20 MHz    | BPSK<br>6 Mbps         | 1       | z (Axial)       | -4.08        | -47.07       | -50.36                | 1.79                | 42.99        | T4       | 7.9, 7.9, 3.7   |
|                                        |                       |           |                        |         | y (Transversal) | -12.09       | -46.97       | -50.39                |                     | 34.88        | T4       | 10, 16.7, 3.7   |
|                                        | CH.40<br>5200 MHz     | 20 MHz    | BPSK<br>6 Mbps         | 2       | z (Axial)       | -4.08        | -47.59       | -50.36                | 1.71                | 43.51        | T4       | 7.9, 7.9, 3.7   |
|                                        |                       |           |                        |         | y (Transversal) | -11.48       | -46.77       | -50.39                |                     | 35.29        | T4       | 10, 16.7, 3.7   |
| 802.11a<br>Codec : EVS SWB 24.4 kbit/s | CH.6<br>2437 MHz      | 20 MHz    | DSSS<br>1 Mbps         | 1       | z (Axial)       | -3.89        | -43.44       | -50.36                | 1.70                | 39.55        | T4       | 8.3, 6.2, 3.7   |
|                                        |                       |           |                        |         | y (Transversal) | -11.49       | -46.99       | -50.39                |                     | 35.50        | T4       | 5, 0.4, 3.7     |
|                                        | CH.6<br>2437 MHz      | 20 MHz    | DSSS<br>1 Mbps         | 2       | z (Axial)       | -1.68        | -45.72       | -50.38                | 1.84                | 44.04        | T4       | 5.4, 4.6, 3.7   |
|                                        |                       |           |                        |         | y (Transversal) | -9.73        | -45.99       | -50.42                |                     | 36.26        | T4       | 12.1, 16.7, 3.7 |

### 9.2. GSM/WCDMA/VoLTE Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband and Wideband) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations.

A codec investigation was performed on one band of each GSM, W-CDMA, LTE FDD.

The highlighted results below were determined to be the worst case codec configuration(s) for GSM, W-CDMA and LTE.

| Codec Investigation |        |        |                 |                                |
|---------------------|--------|--------|-----------------|--------------------------------|
| Codec State         | FR V1  | HR V1  | Orientation     | Band/<br>BandWidth/<br>Channel |
| ABM1 (dB/m)         | 8.15   | 7.75   | z<br>(Axial)    | GSM 850<br>CH.190              |
| ABM2 (dBA/m)        | -20.71 | -24.06 |                 |                                |
| S+N/N (dB)          | 28.86  | 31.81  |                 |                                |
| Freq. Resposne (dB) | 1.86   | 1.37   |                 |                                |
| ABM1 (dB/m)         | -1.11  | -0.70  | y (Transversal) |                                |
| ABM2 (dBA/m)        | -24.30 | -27.74 |                 |                                |
| S+N/N (dB)          | 23.19  | 27.04  |                 |                                |

#### Note(s):

A bitrate investigation was performed on the pre-install phone application to determine the worst-case bitrate;

- For GSM, it is observed that FR V1 is the worst-case.

| Codec Investigation |                 |        |        |                 |        |        |                 |                                      |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--------------------------------------|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | Orientation     | Band/<br>BandWidth/<br>Channel       |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  |                 |                                      |
| ABM1 (dB/m)         | 6.34            | 6.75   | 7.03   | 4.19            | 4.73   | 4.91   | z<br>(Axial)    | WCDMA<br>Band V<br>Rel.99<br>CH.4183 |
| ABM2 (dBA/m)        | -36.61          | -35.95 | -34.95 | -39.92          | -39.56 | -39.42 |                 |                                      |
| S+N/N (dB)          | 42.95           | 42.70  | 41.98  | 44.11           | 44.29  | 44.33  |                 |                                      |
| Freq. Resposne (dB) | 2.00            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | y (Transversal) |                                      |
| ABM1 (dB/m)         | -2.40           | -2.37  | -1.74  | -4.39           | -3.85  | -4.76  |                 |                                      |
| ABM2 (dBA/m)        | -44.25          | -43.90 | -42.76 | -46.00          | -46.22 | -46.55 |                 |                                      |
| S+N/N (dB)          | 41.85           | 41.53  | 41.02  | 41.61           | 42.37  | 41.79  |                 |                                      |

#### Note(s):

A bitrate investigation was performed on the pre-install phone application to determine the worst-case bitrate;

- For WCDMA, it is observed that AMR-NB 12.2 kbit/s is the worst-case.

| Codec Investigation |                 |        |        |                 |        |        |                 |        |        |                 |        |        |                  |        |        |                 |                                                      |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|------------------------------------------------------|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | EVS nb (kbit/s) |        |        | EVS wb (kbit/s) |        |        | EVS swb (kbit/s) |        |        | Orientation     | Band/<br>BandWidth/<br>Channel                       |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  | 5.9             | 13.2   | 24.4   | 5.9             | 13.2   | 24.4   | 9.6              | 16.4   | 24.4   |                 |                                                      |
| ABM1 (dB/m)         | 5.35            | 5.69   | 5.70   | 3.44            | 4.47   | 4.75   | 5.68            | 5.74   | 5.94   | -1.42           | 4.78   | 4.32   | -3.08            | -2.51  | -2.48  | z<br>(Axial)    | LTE Band 66<br>20 MHz<br>16QAM<br>RB1/0<br>CH.132322 |
| ABM2 (dBA/m)        | -33.53          | -33.39 | -32.78 | -34.16          | -34.04 | -33.87 | -31.55          | -31.91 | -32.43 | -34.09          | -33.87 | -34.07 | -35.38           | -34.94 | -34.83 |                 |                                                      |
| S+N/N (dB)          | 38.88           | 39.08  | 38.48  | 37.60           | 38.51  | 38.62  | 37.23           | 37.65  | 38.37  | 32.67           | 38.65  | 38.39  | 32.30            | 32.43  | 32.35  |                 |                                                      |
| Freq. Resposne (dB) | 1.46            | 1.86   | 1.99   | 2.00            | 2.00   | 2.00   | 1.84            | 1.95   | 1.94   | 2.00            | 1.90   | 2.00   | 1.66             | 2.00   | 1.94   | y (Transversal) |                                                      |
| ABM1 (dB/m)         | -3.45           | -3.16  | -2.71  | -5.02           | -4.00  | -3.94  | -5.86           | -2.73  | -2.93  | -7.10           | -4.05  | -4.32  | -10.45           | -10.92 | -10.79 |                 |                                                      |
| ABM2 (dBA/m)        | -41.73          | -41.30 | -41.04 | -42.16          | -42.07 | -41.66 | -39.81          | -40.16 | -40.32 | -41.67          | -41.82 | -42.09 | -42.73           | -42.58 | -42.38 |                 |                                                      |
| S+N/N (dB)          | 38.28           | 38.14  | 38.33  | 37.14           | 38.07  | 37.72  | 33.95           | 37.43  | 37.39  | 34.57           | 37.77  | 37.77  | 32.28            | 31.66  | 31.59  |                 |                                                      |

**Note(s):**

A bitrate investigation was performed on the pre-install phone application to determine the worst-case bitrate;

- For LTE-FDD, it is observed that EVS-SWB 24.4 kbit/s is the worst-case.

### 9.3. GSM/WCDMA/VoLTE Air Interface Investigation

Using the worst-case bitrate found in Sec.9.1, a limited set of bands/channels/bandwidths were then tested to confirm that there is no effect to the T-rating when charging the band/channel/bandwidth.

#### GSM / W-CDMA (UMTS) Air interface Investigation:

| Mode:                                                         | Channel and Frequency  | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Position       |
|---------------------------------------------------------------|------------------------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|----------------|
| GSM 850<br>Voice Coder<br>Speech Codec: FR V1                 | CH.128<br>824.20 MHz   | z (Axial)       | 7.51            | -22.53          | -50.30                      | 1.98                      | 30.04           | T4       | 8.3, 7.9, 3.7  |
|                                                               |                        | y (Transversal) | -0.81           | -26.19          | -50.37                      |                           | 25.38           | T3       | 8.3, 16.7, 3.7 |
|                                                               | CH.190<br>836.60 MHz   | z (Axial)       | 8.15            | -20.71          | -50.30                      | 1.86                      | 28.86           | T3       | 8.3, 7.9, 3.7  |
|                                                               |                        | y (Transversal) | -1.11           | -24.30          | -50.37                      |                           | 23.19           | T3       | 8.3, 16.7, 3.7 |
|                                                               | CH.251<br>848.60 MHz   | z (Axial)       | 7.58            | -23.52          | -50.30                      | 1.94                      | 31.10           | T4       | 8.3, 7.9, 3.7  |
|                                                               |                        | y (Transversal) | -1.00           | -27.30          | -50.37                      |                           | 26.30           | T3       | 8.3, 16.7, 3.7 |
| GSM 1900<br>Voice Coder<br>Speech Codec: FR V1                | CH.661<br>1880.00 MHz  | z (Axial)       | 7.63            | -28.96          | -50.30                      | 1.82                      | 36.59           | T4       | 8.3, 8.3, 3.7  |
|                                                               |                        | y (Transversal) | -0.78           | -33.35          | -50.37                      |                           | 32.57           | T4       | 8.3, 16.7, 3.7 |
| W-CDMA Band II<br>Voice Narrow band AMR<br>Codec: 12.2 kbit/s | CH.9400<br>1880.00 MHz | z (Axial)       | 6.93            | -35.30          | -50.44                      | 2.00                      | 42.23           | T4       | 8.3, 8.3, 3.7  |
|                                                               |                        | y (Transversal) | -1.73           | -42.90          | -50.44                      |                           | 41.17           | T4       | 8.3, 17.1, 3.7 |
| W-CDMA Band V<br>Voice Narrow band AMR<br>Codec: 12.2 kbit/s  | CH.4132<br>826.4 MHz   | z (Axial)       | 6.89            | -35.12          | -50.44                      | 2.00                      | 42.01           | T4       | 8.3, 8.3, 3.7  |
|                                                               |                        | y (Transversal) | -1.97           | -43.13          | -50.44                      |                           | 41.16           | T4       | 8.3, 17.1, 3.7 |
|                                                               | CH.4183<br>836.6 MHz   | z (Axial)       | 7.03            | -34.95          | -50.44                      | 2.00                      | 41.98           | T4       | 8.3, 8.3, 3.7  |
|                                                               |                        | y (Transversal) | -1.74           | -42.76          | -50.44                      |                           | 41.02           | T4       | 8.3, 17.1, 3.7 |
|                                                               | CH.4233<br>846.6 MHz   | z (Axial)       | 6.84            | -35.05          | -50.44                      | 2.00                      | 41.89           | T4       | 8.3, 8.3, 3.7  |
|                                                               |                        | y (Transversal) | -1.92           | -43.21          | -50.44                      |                           | 41.29           | T4       | 8.3, 17.1, 3.7 |

## VoLTE (FDD) Air Interface Investigation:

| Mode:                                              | Channel and Frequency  | Bandw idth | Bandw idth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m)    | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position       |               |
|----------------------------------------------------|------------------------|------------|-------------------------|------------------|-----------------|-----------------|--------------|-----------------------|---------------------|--------------|----------|----------------|---------------|
| LTE Band 66<br>Voice EVS SWB<br>Codec: 24.4 kbit/s | CH.132322<br>1745 MHz  | 20MHz      | QPSK                    | 1/0              | z (Axial)       | -4.38           | -42.51       | -50.43                | 2.00                | 38.13        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.38          | -46.60       | -50.45                |                     | 35.22        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 1/49             | z (Axial)       | -2.89           | -41.20       | -50.43                | 1.89                | 38.31        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.36          | -46.23       | -50.45                |                     | 34.87        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 1/99             | z (Axial)       | -2.77           | -46.39       | -50.43                | 2.00                | 43.62        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.35          | -47.90       | -50.45                |                     | 36.55        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 50/0             | z (Axial)       | -2.75           | -48.88       | -50.43                | 1.94                | 46.13        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.09          | -48.35       | -50.45                |                     | 37.26        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 50/24            | z (Axial)       | -2.72           | -48.51       | -50.43                | 1.91                | 45.79        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.62          | -47.77       | -50.45                |                     | 36.15        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 50/50            | z (Axial)       | -2.68           | -49.80       | -50.43                | 2.00                | 47.12        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.42          | -47.93       | -50.45                |                     | 36.51        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 100/0            | z (Axial)       | -2.69           | -49.20       | -50.43                | 1.86                | 46.51        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.46          | -48.10       | -50.45                |                     | 36.64        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 16QAM            | 1/0             | z (Axial)       | -2.48        | -34.83                | -50.43              | 1.94         | 32.35    | T4             | 8.3, 7.9, 3.7 |
|                                                    |                        |            |                         |                  |                 | y (Transversal) | -10.79       | -42.38                | -50.45              |              | 31.59    | T4             | 8.3, 0, 3.7   |
|                                                    |                        |            |                         | 64QAM            | 1/0             | z (Axial)       | -2.66        | -36.41                | -50.43              | 1.90         | 33.75    | T4             | 8.3, 7.9, 3.7 |
|                                                    |                        |            |                         |                  |                 | y (Transversal) | -11.55       | -44.35                | -50.45              |              | 32.80    | T4             | 8.3, 0, 3.7   |
|                                                    |                        | 15 MHz     | 16QAM                   | 1/0              | z (Axial)       | -1.94           | -33.75       | -50.36                | 1.92                | 31.81        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -10.41          | -42.05       | -50.39                |                     | 31.64        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 1/0              | z (Axial)       | -2.27           | -33.88       | -50.36                | 2.00                | 31.61        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -11.14          | -42.80       | -50.39                |                     | 31.66        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 1/0              | z (Axial)       | -2.11           | -33.93       | -50.36                | 1.92                | 31.82        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -10.65          | -42.35       | -50.39                |                     | 31.70        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 1/0              | z (Axial)       | -1.83           | -33.69       | -50.42                | 1.93                | 31.86        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -10.14          | -41.88       | -50.48                |                     | 31.74        | T4       | 8.3, 0, 3.7    |               |
|                                                    |                        |            |                         | 1/0              | z (Axial)       | -1.28           | -33.08       | -50.42                | 1.95                | 31.80        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -9.51           | -41.45       | -50.48                |                     | 31.94        | T4       | 8.3, 0, 3.7    |               |
|                                                    | CH.132072<br>1720 MHz  | 20 MHz     | 16QAM                   | 1/0              | z (Axial)       | -1.37           | -33.02       | -50.42                | 2.00                | 31.65        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -9.40           | -41.26       | -50.48                |                     | 31.86        | T4       | 8.3, 0, 3.7    |               |
|                                                    | CH.132572<br>1770 MHz  | 20 MHz     | 16QAM                   | 1/0              | z (Axial)       | -1.28           | -37.42       | -50.42                | 1.98                | 36.14        | T4       | 8.3, 7.9, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -10.16          | -44.18       | -50.48                |                     | 34.02        | T4       | 8.3, 0, 3.7    |               |
| LTE Band 2<br>Voice EVS SWB<br>Codec: 24.4 kbit/s  | CH.18900<br>1880.0 MHz | 20 MHz     | 16QAM                   | 1/0              | z (Axial)       | -1.98           | -41.83       | -50.36                | 1.96                | 39.85        | T4       | 8.3, 8.3, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -10.72          | -47.02       | -50.39                |                     | 36.30        | T4       | 8.3, 17.1, 3.7 |               |
|                                                    |                        | 15 MHz     |                         |                  | z (Axial)       | -1.12           | -40.01       | -50.42                | 1.93                | 38.89        | T4       | 8.3, 8.3, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -10.17          | -49.28       | -50.48                |                     | 39.11        | T4       | 8.3, 17.1, 3.7 |               |
|                                                    |                        | 10 MHz     |                         |                  | z (Axial)       | -1.50           | -39.95       | -50.42                | 1.99                | 38.45        | T4       | 8.3, 8.3, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -9.04           | -45.84       | -50.48                |                     | 36.80        | T4       | 8.3, 17.1, 3.7 |               |
|                                                    |                        | 5 MHz      |                         |                  | z (Axial)       | -1.30           | -38.67       | -50.42                | 1.89                | 37.37        | T4       | 8.3, 8.3, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -9.84           | -47.62       | -50.48                |                     | 37.78        | T4       | 8.3, 17.1, 3.7 |               |
|                                                    |                        | 3 MHz      |                         |                  | z (Axial)       | -1.00           | -39.67       | -50.42                | 1.92                | 38.67        | T4       | 8.3, 8.3, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -9.14           | -45.65       | -50.48                |                     | 36.51        | T4       | 8.3, 17.1, 3.7 |               |
|                                                    |                        | 1.4 MHz    |                         |                  | z (Axial)       | -1.00           | -40.07       | -50.42                | 2.00                | 39.07        | T4       | 8.3, 8.3, 3.7  |               |
|                                                    |                        |            |                         |                  | y (Transversal) | -9.50           | -45.88       | -50.48                |                     | 36.38        | T4       | 8.3, 17.1, 3.7 |               |

**VoLTE (FDD) Air Interface Investigation (continued):**

| Mode:                                              | Channel and Frequency | Bandw idth | Bandw idth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position       |
|----------------------------------------------------|-----------------------|------------|-------------------------|------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------------|
| LTE Band 5<br>Voice EVS SWB<br>Codec: 24.4 kbit/s  | CH.20525<br>836.5 MHz | 10 MHz     | 16QAM                   | 1/0              | z (Axial)       | -2.31        | -39.56       | -50.36                | 1.97                | 37.25        | T4       | 7.9, 7.9, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -10.79       | -45.37       | -50.39                |                     | 34.58        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 5 MHz      |                         |                  | z (Axial)       | -1.39        | -38.79       | -50.42                | 1.97                | 37.40        | T4       | 7.9, 7.9, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.97        | -44.86       | -50.48                |                     | 34.89        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 3 MHz      |                         |                  | z (Axial)       | -1.35        | -37.77       | -50.42                | 1.92                | 36.42        | T4       | 7.9, 7.9, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.50        | -44.40       | -50.48                |                     | 34.90        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 1.4 MHz    |                         |                  | z (Axial)       | -1.11        | -38.33       | -50.42                | 1.98                | 37.22        | T4       | 7.9, 7.9, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.90        | -44.94       | -50.48                |                     | 35.04        | T4       | 7.9, 16.7, 3.7 |
| LTE Band 7<br>Voice EVS SWB<br>Codec: 24.4 kbit/s  | CH.21100<br>2535 MHz  | 20 MHz     | 16QAM                   | 1/0              | z (Axial)       | -0.84        | -41.56       | -50.42                | 2.00                | 40.72        | T4       | 8.3, 7.5, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.76        | -45.77       | -50.48                |                     | 36.01        | T4       | 8.3, 15.4, 3.7 |
|                                                    |                       | 15 MHz     |                         |                  | z (Axial)       | -1.11        | -41.08       | -50.42                | 1.98                | 39.97        | T4       | 8.3, 7.5, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.32        | -46.13       | -50.48                |                     | 36.81        | T4       | 8.3, 15.4, 3.7 |
|                                                    |                       | 10 MHz     |                         |                  | z (Axial)       | -0.87        | -41.68       | -50.42                | 1.97                | 40.81        | T4       | 8.3, 7.5, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.20        | -46.95       | -50.48                |                     | 37.75        | T4       | 8.3, 15.4, 3.7 |
|                                                    |                       | 5 MHz      |                         |                  | z (Axial)       | -0.78        | -41.88       | -50.42                | 1.91                | 41.10        | T4       | 8.3, 7.5, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.55        | -46.12       | -50.48                |                     | 36.57        | T4       | 8.3, 15.4, 3.7 |
| LTE Band 12<br>Voice EVS SWB<br>Codec: 24.4 kbit/s | CH.23095<br>707.5 MHz | 10 MHz     | 16QAM                   | 1/0              | z (Axial)       | -2.52        | -39.31       | -50.36                | 1.98                | 36.79        | T4       | 7.9, 8.3, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -10.65       | -44.65       | -50.39                |                     | 34.00        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 5 MHz      |                         |                  | z (Axial)       | -1.38        | -38.10       | -50.42                | 2.00                | 36.72        | T4       | 7.9, 8.3, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.95        | -44.07       | -50.48                |                     | 34.12        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 3 MHz      |                         |                  | z (Axial)       | -1.25        | -37.24       | -50.42                | 1.90                | 35.99        | T4       | 7.9, 8.3, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -8.92        | -43.42       | -50.48                |                     | 34.50        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 1.4 MHz    |                         |                  | z (Axial)       | -1.46        | -38.05       | -50.42                | 1.95                | 36.59        | T4       | 7.9, 8.3, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -9.89        | -44.23       | -50.48                |                     | 34.34        | T4       | 7.9, 16.7, 3.7 |
| LTE Band 13<br>Voice EVS SWB<br>Codec: 24.4 kbit/s | CH.23230<br>782 MHz   | 10 MHz     | 16QAM                   | 1/0              | z (Axial)       | -2.35        | -39.14       | -50.36                | 1.91                | 36.79        | T4       | 7.9, 8.3, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -10.95       | -45.15       | -50.39                |                     | 34.20        | T4       | 7.9, 16.7, 3.7 |
|                                                    |                       | 5 MHz      |                         |                  | z (Axial)       | -1.46        | -41.73       | -50.42                | 1.94                | 40.27        | T4       | 7.9, 8.3, 3.7  |
|                                                    |                       |            |                         |                  | y (Transversal) | -10.02       | -47.19       | -50.48                |                     | 37.17        | T4       | 7.9, 16.7, 3.7 |

## 9.4. VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/High bit rates for Narrowband and Wideband) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4GHz and 5GHz.

The highlighted results below were determined to be the worst case codec configuration(s) for Wi-Fi 2.4GHz and 5GHz

| Codec Investigation |                 |        |        |                 |        |        |                 |        |        |                 |        |        |                  |        |        |                 |                                    |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|------------------------------------|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | EVS nb (kbit/s) |        |        | EVS wb (kbit/s) |        |        | EVS swb (kbit/s) |        |        | Orientation     | Band/<br>BandWidth/<br>Channel     |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  | 5.9             | 13.2   | 24.4   | 5.9             | 13.2   | 24.4   | 9.6              | 16.4   | 24.4   |                 |                                    |
| ABM1 (dB/m)         | 3.82            | 3.64   | 3.99   | -1.39           | 0.33   | 1.43   | 4.22            | 4.34   | 3.72   | -3.50           | 0.68   | -0.07  | -4.93            | -2.95  | -3.89  | z<br>(Axial)    | 802.11b<br>DSSS<br>1 Mbps<br>CH.6  |
| ABM2 (dBA/m)        | -35.52          | -35.40 | -34.40 | -37.72          | -37.54 | -37.63 | -32.94          | -32.37 | -33.55 | -40.20          | -38.48 | -39.71 | -42.39           | -43.67 | -43.44 |                 |                                    |
| S+N/N (dB)          | 39.34           | 39.04  | 38.39  | 36.33           | 37.87  | 39.06  | 37.16           | 36.71  | 37.27  | 36.70           | 39.16  | 39.64  | 37.46            | 40.72  | 39.55  |                 |                                    |
| Freq. Resposne (dB) | 1.81            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | 1.99             | 1.89   | 1.70   | y (Transversal) |                                    |
| ABM1 (dB/m)         | -5.46           | -4.78  | -4.41  | -7.54           | -7.74  | -7.63  | -4.28           | -4.52  | -4.70  | -9.32           | -8.53  | -8.87  | -11.10           | -11.74 | -11.49 |                 |                                    |
| ABM2 (dBA/m)        | -42.47          | -42.20 | -41.43 | -43.15          | -43.67 | -43.59 | -40.20          | -40.42 | -41.11 | -45.75          | -45.12 | -45.72 | -47.32           | -47.42 | -46.99 |                 |                                    |
| S+N/N (dB)          | 37.01           | 37.42  | 37.02  | 35.61           | 35.93  | 35.96  | 35.92           | 35.90  | 36.41  | 36.43           | 36.59  | 36.85  | 36.22            | 35.68  | 35.50  | z<br>(Axial)    | 802.11a<br>BPSK<br>6 Mbps<br>CH.40 |
| ABM1 (dB/m)         | 4.27            | 4.03   | 4.65   | -1.85           | 0.42   | 0.24   | 4.38            | 4.75   | 4.49   | -4.75           | 1.01   | 0.07   | -3.47            | -4.34  | -4.08  |                 |                                    |
| ABM2 (dBA/m)        | -36.06          | -36.06 | -34.99 | -39.31          | -38.80 | -38.84 | -31.54          | -32.64 | -33.74 | -40.69          | -39.23 | -40.53 | -45.97           | -45.87 | -47.07 |                 |                                    |
| S+N/N (dB)          | 40.33           | 40.09  | 39.64  | 37.46           | 39.22  | 39.08  | 35.92           | 37.39  | 38.23  | 35.94           | 40.24  | 40.60  | 42.50            | 41.53  | 42.99  | y (Transversal) |                                    |
| Freq. Resposne (dB) | 1.84            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | 2.00            | 2.00   | 2.00   | 1.75             | 1.76   | 1.79   |                 |                                    |
| ABM1 (dB/m)         | -4.53           | -4.45  | -3.88  | -8.65           | -8.63  | -8.32  | -3.84           | -3.88  | -4.45  | -9.62           | -8.11  | -7.68  | -10.73           | -11.50 | -12.09 |                 |                                    |
| ABM2 (dBA/m)        | -42.23          | -41.98 | -41.91 | -43.98          | -44.37 | -43.50 | -39.41          | -40.08 | -40.76 | -44.95          | -44.23 | -44.76 | -46.36           | -46.44 | -46.97 | y (Transversal) |                                    |
| S+N/N (dB)          | 37.70           | 37.53  | 38.03  | 35.33           | 35.74  | 35.18  | 35.57           | 36.20  | 36.31  | 35.33           | 36.12  | 37.08  | 35.63            | 34.94  | 34.88  |                 |                                    |

### Note(s):

A bitrate investigation was performed on the pre-install phone application to determine the worst-case bitrate;

1. For 802.11b, it is observed that EVS-SWB 24.4 kbit/s is the worst-case.
2. For 802.11a, it is observed that EVS-SWB 24.4 kbit/s is the worst-case.

## 9.5. VoWi-Fi Air Interface Investigation

Using the data from Sec.9.3, further testing was performed on the remaining 802.11 modes. The objective of these measurements is to ensure that changing the modulation, bandwidth, and data rate, whilst using the worst case codec configuration measured in Sec.9.3, yields no unexpected variations.

### VoWi-Fi 2.4GHz Air Interface Investigation:

| Mode:           | Channel and Frequency | Bandwidth | Bandwidth / Modulation | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position      |
|-----------------|-----------------------|-----------|------------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|---------------|
| 802.11b         | CH.6<br>2437 MHz      | 20 MHz    | DSSS<br>1 Mbps         | z (Axial)       | -3.89        | -43.44       | -50.36                | 1.70                | 39.55        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.49       | -46.99       | -50.39                |                     | 35.50        | T4       | 5, 0.4, 3.7   |
|                 |                       |           | CCK<br>5.5 Mbps        | z (Axial)       | -4.40        | -44.37       | -50.36                | 1.87                | 39.97        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.53       | -47.11       | -50.39                |                     | 35.58        | T4       | 5, 0.4, 3.7   |
|                 |                       |           | CCK<br>11 Mbps         | z (Axial)       | -4.20        | -43.16       | -50.36                | 1.75                | 38.96        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.40       | -47.28       | -50.39                |                     | 35.88        | T4       | 5, 0.4, 3.7   |
| 802.11g         | CH.6<br>2437 MHz      | 20 MHz    | BPSK<br>6 Mbps         | z (Axial)       | -4.55        | -43.34       | -50.36                | 1.63                | 38.79        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.77       | -47.95       | -50.39                |                     | 36.18        | T4       | 5, 0.4, 3.7   |
| 802.11n<br>HT20 | CH.6<br>2437 MHz      | 20 MHz    | MCS 0<br>6.5 Mbps      | z (Axial)       | -3.05        | -44.21       | -50.36                | 1.41                | 41.16        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.58       | -47.47       | -50.39                |                     | 35.89        | T4       | 5, 0.4, 3.7   |
| 802.11b         | CH.1<br>2412 MHz      | 20 MHz    | DSSS<br>1 Mbps         | z (Axial)       | -4.73        | -42.70       | -50.36                | 1.78                | 37.97        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.06       | -47.19       | -50.39                |                     | 36.13        | T4       | 5, 0.4, 3.7   |
|                 | CH.11<br>2462 MHz     | 20 MHz    |                        | z (Axial)       | -4.51        | -42.87       | -50.36                | 1.77                | 38.36        | T4       | 8.3, 6.2, 3.7 |
|                 |                       |           |                        | y (Transversal) | -11.20       | -47.17       | -50.39                |                     | 35.97        | T4       | 5, 0.4, 3.7   |

**VoWi-Fi 5GHz Air Interface Investigation:**

| Mode:             | Channel and Frequency | Bandwidth | Bandwidth / Modulation | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position      |
|-------------------|-----------------------|-----------|------------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|---------------|
| 802.11a           | CH.40<br>5200 MHz     | 20 MHz    | BPSK<br>6 Mbps         | z (Axial)       | -4.08        | -47.07       | -50.36                | 1.79                | 42.99        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -12.09       | -46.97       | -50.39                |                     | 34.88        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | QPSK<br>18 Mbps        | z (Axial)       | -4.10        | -46.68       | -50.36                | 1.77                | 42.58        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.01       | -46.76       | -50.39                |                     | 35.75        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | 64QAM<br>54 Mbps       | z (Axial)       | -3.90        | -46.25       | -50.36                | 1.87                | 42.35        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.05       | -47.12       | -50.39                |                     | 36.07        | T4       | 10, 16.7, 3.7 |
| 802.11n<br>HT20   | CH.40<br>5200 MHz     | 20 MHz    | MCS 0<br>6.5 Mbps      | z (Axial)       | -2.83        | -45.88       | -50.36                | 1.87                | 43.05        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.57       | -46.64       | -50.39                |                     | 35.07        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 3<br>26 Mbps       | z (Axial)       | -4.22        | -46.25       | -50.36                | 1.59                | 42.03        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.31       | -46.44       | -50.39                |                     | 35.13        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 7<br>65 Mbps       | z (Axial)       | -3.97        | -45.75       | -50.36                | 1.80                | 41.78        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -10.93       | -46.15       | -50.39                |                     | 35.22        | T4       | 10, 16.7, 3.7 |
| 802.11n<br>HT40   | CH.38<br>5190 MHz     | 40 MHz    | MCS 0<br>13.5 Mbps     | z (Axial)       | -2.75        | -45.59       | -50.36                | 1.80                | 42.84        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -10.92       | -46.64       | -50.39                |                     | 35.72        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 3<br>54 Mbps       | z (Axial)       | -3.83        | -46.29       | -50.36                | 1.67                | 42.46        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.48       | -46.42       | -50.39                |                     | 34.94        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 7<br>135 Mbps      | z (Axial)       | -4.10        | -47.09       | -50.36                | 1.80                | 42.99        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -10.77       | -46.96       | -50.39                |                     | 36.19        | T4       | 10, 16.7, 3.7 |
| 802.11ac<br>VHT20 | CH.40<br>5200 MHz     | 20 MHz    | MCS 0<br>6.5 Mbps      | z (Axial)       | -3.98        | -45.10       | -50.36                | 1.58                | 41.12        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.01       | -46.31       | -50.39                |                     | 35.30        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 4<br>39 Mbps       | z (Axial)       | -4.38        | -46.28       | -50.36                | 1.76                | 41.90        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.23       | -46.36       | -50.39                |                     | 35.13        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 8<br>78 Mbps       | z (Axial)       | -4.11        | -46.14       | -50.36                | 1.76                | 42.03        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.21       | -46.21       | -50.39                |                     | 35.00        | T4       | 10, 16.7, 3.7 |
| 802.11ac<br>VHT40 | CH.38<br>5190 MHz     | 40 MHz    | MCS 0<br>13.5 Mbps     | z (Axial)       | -4.26        | -45.93       | -50.36                | 1.82                | 41.67        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.05       | -46.59       | -50.39                |                     | 35.54        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 4<br>108 Mbps      | z (Axial)       | -4.13        | -46.60       | -50.36                | 1.60                | 42.47        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.42       | -46.80       | -50.39                |                     | 35.38        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 9<br>180 Mbps      | z (Axial)       | -3.81        | -46.40       | -50.36                | 1.61                | 42.59        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -11.04       | -46.87       | -50.39                |                     | 35.83        | T4       | 10, 16.7, 3.7 |
| 802.11ac<br>VHT80 | CH.42<br>5210 MHz     | 80 MHz    | MCS 0<br>29.3 Mbps     | z (Axial)       | -4.31        | -45.65       | -50.36                | 1.72                | 41.34        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -10.55       | -46.81       | -50.39                |                     | 36.26        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 4<br>175.5 Mbps    | z (Axial)       | -2.30        | -45.74       | -50.36                | 1.62                | 43.44        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -10.81       | -46.74       | -50.39                |                     | 35.93        | T4       | 10, 16.7, 3.7 |
|                   |                       |           | MCS 9<br>390 Mbps      | z (Axial)       | -4.26        | -46.40       | -50.36                | 1.81                | 42.14        | T4       | 7.9, 7.9, 3.7 |
|                   |                       |           |                        | y (Transversal) | -10.63       | -46.57       | -50.39                |                     | 35.94        | T4       | 10, 16.7, 3.7 |

**VoWi-Fi 5GHz Air Interface Investigation (Continued):**

| Mode:   | Channel and Frequency | Bandw idth | Bandw idth / Modulation | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position        |
|---------|-----------------------|------------|-------------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| 802.11a | CH.56<br>5280 MHz     | 20 MHz     | BPSK<br>6 Mbps          | z (Axial)       | -4.11        | -47.39       | -50.36                | 1.67                | 43.28        | T4       | 8.3, 8.3, 3.7   |
|         |                       |            |                         | y (Transversal) | -12.03       | -47.64       | -50.39                |                     | 35.61        | T4       | 8.3, 16.7, 3.7  |
|         | CH.120<br>5600 MHz    |            |                         | z (Axial)       | -3.73        | -48.11       | -50.36                | 1.78                | 44.38        | T4       | 8.3, 8.3, 3.7   |
|         |                       |            |                         | y (Transversal) | -11.74       | -45.70       | -50.39                |                     | 33.96        | T4       | 11.7, 16.7, 3.7 |
|         | CH.157<br>5785 MHz    |            |                         | z (Axial)       | -3.36        | -46.34       | -50.36                | 1.66                | 42.98        | T4       | 11.3, 8.3, 3.7  |
|         |                       |            |                         | y (Transversal) | -11.98       | -47.67       | -50.39                |                     | 35.69        | T4       | 8.3, 16.7, 3.7  |
|         | CH.36<br>5180 MHz     |            |                         | z (Axial)       | -4.28        | -46.20       | -50.36                | 1.94                | 41.92        | T4       | 7.9, 7.9, 3.7   |
|         |                       |            |                         | y (Transversal) | -10.91       | -46.70       | -50.39                |                     | 35.79        | T4       | 10, 16.7, 3.7   |
|         | CH.48<br>5240 MHz     |            |                         | z (Axial)       | -3.93        | -47.01       | -50.36                | 1.69                | 43.08        | T4       | 7.9, 7.9, 3.7   |
|         |                       |            |                         | y (Transversal) | -11.01       | -46.67       | -50.39                |                     | 35.66        | T4       | 10, 16.7, 3.7   |

## 9.6. OTT Codec Investigation

The DUT's nested OTT application supports range of codec bit rate 6 – 75 kbit/s, thus an investigation between the various codec configurations (6/40/75 as Low/Mid/High bit rates) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each service type. The table below compares the varying codec configurations.

| Codec Investigation |                         |        |        |                 |                                                                |                                         |
|---------------------|-------------------------|--------|--------|-----------------|----------------------------------------------------------------|-----------------------------------------|
| Codec State         | codec bit rate (kbit/s) |        |        | Orientation     | Band/<br>BandWidth/<br>Channel                                 |                                         |
|                     | 6                       | 40     | 75     |                 |                                                                |                                         |
| ABM1 (dB/m)         | 4.58                    | 4.19   | 4.09   | z<br>(Axial)    | GSM850<br>EGPRS 2slots<br>CH.190                               |                                         |
| ABM2 (dBA/m)        | -26.53                  | -26.53 | -26.06 |                 |                                                                |                                         |
| S+N/N (dB)          | 31.11                   | 30.72  | 30.15  |                 |                                                                |                                         |
| Freq. Resposne (dB) | 2.00                    | 2.00   | 2.00   |                 |                                                                |                                         |
| ABM1 (dB/m)         | -4.61                   | -4.16  | -4.16  | y (Transversal) |                                                                |                                         |
| ABM2 (dBA/m)        | -29.89                  | -31.68 | -31.88 |                 |                                                                |                                         |
| S+N/N (dB)          | 25.28                   | 27.52  | 27.72  |                 |                                                                |                                         |
| ABM1 (dB/m)         | 2.64                    | 4.01   | 3.28   |                 |                                                                |                                         |
| ABM2 (dBA/m)        | -49.36                  | -49.12 | -49.14 | z<br>(Axial)    | WCDMA<br>Band V<br>HSUPA<br>Subtest1<br>CH.4183                |                                         |
| S+N/N (dB)          | 52.00                   | 53.13  | 52.42  |                 |                                                                |                                         |
| Freq. Resposne (dB) | 2.00                    | 2.00   | 2.00   |                 |                                                                |                                         |
| ABM1 (dB/m)         | -4.83                   | -5.40  | -4.66  |                 |                                                                |                                         |
| ABM2 (dBA/m)        | -48.22                  | -49.36 | -48.14 | y (Transversal) |                                                                |                                         |
| S+N/N (dB)          | 43.39                   | 43.96  | 43.48  |                 |                                                                |                                         |
| ABM1 (dB/m)         | 5.45                    | 5.42   | 5.65   |                 |                                                                |                                         |
| ABM2 (dBA/m)        | -35.71                  | -34.51 | -35.74 |                 |                                                                |                                         |
| S+N/N (dB)          | 41.16                   | 39.93  | 41.39  | z<br>(Axial)    | LTE FDD<br>LTE Band 66<br>20MHz<br>16QAM<br>RB1/0<br>CH.132322 |                                         |
| Freq. Resposne (dB) | 2.00                    | 2.00   | 2.00   |                 |                                                                |                                         |
| ABM1 (dB/m)         | -4.49                   | -3.93  | -4.61  |                 |                                                                |                                         |
| ABM2 (dBA/m)        | -39.98                  | -40.82 | -44.20 |                 |                                                                |                                         |
| S+N/N (dB)          | 35.49                   | 36.89  | 39.59  | y (Transversal) |                                                                |                                         |
| ABM1 (dB/m)         | 3.33                    | 2.49   | 3.88   |                 |                                                                |                                         |
| ABM2 (dBA/m)        | -37.09                  | -35.03 | -36.82 |                 |                                                                |                                         |
| S+N/N (dB)          | 40.42                   | 37.52  | 40.70  |                 |                                                                |                                         |
| Freq. Resposne (dB) | 2.00                    | 2.00   | 2.00   | z<br>(Axial)    | WLAN 2.4GHz<br>802.11b<br>1Mbps<br>CH.6                        |                                         |
| ABM1 (dB/m)         | -5.92                   | -5.74  | -5.65  |                 |                                                                |                                         |
| ABM2 (dBA/m)        | -39.14                  | -41.68 | -39.61 |                 |                                                                |                                         |
| S+N/N (dB)          | 33.22                   | 35.94  | 33.96  |                 |                                                                |                                         |
| ABM1 (dB/m)         | 4.69                    | 6.26   | 4.54   | z<br>(Axial)    |                                                                | WLAN 5GHz<br>802.11a<br>6Mbps<br>CH.120 |
| ABM2 (dBA/m)        | -39.34                  | -39.36 | -38.84 |                 |                                                                |                                         |
| S+N/N (dB)          | 44.03                   | 45.62  | 43.38  |                 |                                                                |                                         |
| Freq. Resposne (dB) | 2.00                    | 2.00   | 2.00   |                 |                                                                |                                         |
| ABM1 (dB/m)         | -2.58                   | -2.77  | -1.93  | y (Transversal) |                                                                |                                         |
| ABM2 (dBA/m)        | -44.18                  | -44.70 | -44.48 |                 |                                                                |                                         |
| S+N/N (dB)          | 41.60                   | 41.93  | 42.55  |                 |                                                                |                                         |

### Note(s):

A bitrate investigation was performed on the pre-install phone application to determine the worst-case bitrate;

- For GSM, W-CDMA, LTE-FDD, WLAN 2.4GHz, and WLAN 5GHz, it is observed that 6 kbps is the worst-case.

## 9.7. OTT Air Interface Investigation

| Mode:                                  | Channel and Frequency | Bandwidth | Bandwidth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position        |
|----------------------------------------|-----------------------|-----------|------------------------|------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| GSM850 EGPRS 2slots Codec : 6          | CH.190 836.6 MHz      |           |                        |                  | z (Axial)       | 4.58         | -26.53       | -50.40                | 2.00                | 31.11        | T4       | 8.3, 5.4, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -4.61        | -29.89       | -50.46                |                     | 25.28        | T3       | 11.7, 15, 3.7   |
| GSM1900 EGPRS 2slots Codec : 6         | CH.661 1880.0 MHz     |           |                        |                  | z (Axial)       | 1.55         | -30.36       | -50.38                | 2.00                | 31.91        | T4       | 8.3, 7.9, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -4.82        | -40.25       | -50.42                |                     | 35.43        | T4       | 8.3, 2.9, 3.7   |
| WCDMA Band II HSUPA Subtest1 Codec : 6 | CH.9400 1880.0 MHz    |           |                        |                  | z (Axial)       | 2.27         | -48.87       | -50.42                | 2.00                | 51.14        | T4       | 8.3, 7.1, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -5.03        | -48.10       | -50.48                |                     | 43.07        | T4       | 8.3, 0, 3.7     |
| WCDMA Band V HSUPA Subtest1 Codec : 6  | CH.4183 836.6 MHz     |           |                        |                  | z (Axial)       | 2.64         | -49.36       | -50.42                | 2.00                | 52.00        | T4       | 10.4, 7.9, 3.7  |
|                                        |                       |           |                        |                  | y (Transversal) | -4.83        | -48.22       | -50.48                |                     | 43.39        | T4       | 9.2, 0, 3.7     |
| LTE Band 2 Codec : 6                   | CH.18900 1880 MHz     | 20MHz     | 16QAM                  | 1/0              | z (Axial)       | 3.27         | -40.37       | -50.42                | 2.00                | 43.64        | T4       | 5.4, 7.9, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -5.09        | -44.21       | -50.48                |                     | 39.12        | T4       | 7.9, 2.5, 3.7   |
| LTE Band 5 Codec : 6                   | CH.20525 836.5 MHz    | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | 5.26         | -37.72       | -50.42                | 2.00                | 42.98        | T4       | 8.3, 7.5, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -4.22        | -46.23       | -50.48                |                     | 42.01        | T4       | 4.6, 0, 3.7     |
| LTE Band 7 Codec : 6                   | CH.21100 2535 MHz     | 20MHz     | 16QAM                  | 1/0              | z (Axial)       | 5.70         | -41.42       | -50.42                | 2.00                | 47.12        | T4       | 8.3, 7.9, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -5.86        | -45.69       | -50.48                |                     | 39.83        | T4       | 6.3, 2.1, 3.7   |
| LTE Band 12 Codec : 6                  | CH.23095 707.5 MHz    | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | 4.63         | -39.42       | -50.42                | 2.00                | 44.05        | T4       | 8.3, 8.3, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -3.27        | -44.64       | -50.48                |                     | 41.37        | T4       | 8.3, 0, 3.7     |
| LTE Band 13 Codec : 6                  | CH.23230 782 MHz      | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | 4.38         | -38.38       | -50.42                | 1.59                | 42.76        | T4       | 7.9, 5.8, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -4.85        | -43.06       | -50.48                |                     | 38.21        | T4       | 12.1, -0.4, 3.7 |
| LTE Band 66 Codec : 6                  | CH.132322 1745 MHz    | 20 MHz    | 16QAM                  | 1/0              | z (Axial)       | 5.45         | -35.71       | -50.42                | 2.00                | 41.16        | T4       | 7.9, 7.9, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -4.49        | -39.98       | -50.48                |                     | 35.49        | T4       | 12.1, 0, 3.7    |
| Wi-Fi 2.4 GHz Codec : 6                | CH.6 2437 MHz         | 20 MHz    | DSSS 1 Mbps            |                  | z (Axial)       | 3.33         | -37.09       | -50.40                | 2.00                | 40.42        | T4       | 7.5, 7.9, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -5.92        | -39.14       | -50.46                |                     | 33.22        | T4       | 10.8, 14.2, 3.7 |
| U-NII 1 Codec : 6                      | Ch.40 5200 MHz        | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 5.66         | -38.47       | -50.40                | 2.00                | 44.13        | T4       | 7.9, 4.6, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -2.00        | -43.28       | -50.46                |                     | 41.28        | T4       | 10, 16.7, 3.7   |
| U-NII 2A Codec : 6                     | Ch.56 5280 MHz        | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 6.85         | -43.06       | -50.40                | 2.00                | 49.91        | T4       | 8.3, 5.8, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -3.46        | -47.43       | -50.46                |                     | 43.97        | T4       | 8.3, 17.1, 3.7  |
| U-NII 2C Codec : 6                     | CH.120 5600 MHz       | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 4.69         | -39.34       | -50.40                | 2.00                | 44.03        | T4       | 8.3, 4.6, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -2.58        | -44.18       | -50.46                |                     | 41.60        | T4       | 11.7, 16.7, 3.7 |
| U-NII 3 Codec : 6                      | CH.157 5785 MHz       | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 2.98         | -40.04       | -50.40                | 2.00                | 43.02        | T4       | 8.3, 7.9, 3.7   |
|                                        |                       |           |                        |                  | y (Transversal) | -2.44        | -44.64       | -50.46                |                     | 42.20        | T4       | 10.4, 16.7, 3.7 |

## 9.8. OTT NR Air Interface investigation

| Mode:                 | Channel and Frequency | Bandwidth       | Bandwidth idth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m)    | ABM2 dB(A/m)    | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating      | Position      |               |               |
|-----------------------|-----------------------|-----------------|-----------------------------|------------------|-----------------|-----------------|-----------------|-----------------------|---------------------|--------------|---------------|---------------|---------------|---------------|
| NR Band n66 DFTs-OFDM | CH.349000 1745 MHz    | 20MHz           | QPSK                        | 1/0              | z (Axial)       | 3.27            | -29.65          | -49.67                | N/A                 | 32.92        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.02          | -49.68                |                     | 34.16        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 |                             | 1/53             | z (Axial)       | 3.27            | -29.67          | -49.67                | N/A                 | 32.94        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -39.91          | -49.68                |                     | 34.05        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 |                             | 1/104            | z (Axial)       | 3.27            | -31.51          | -49.67                | N/A                 | 34.78        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -41.00          | -49.68                |                     | 35.14        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 |                             | 50/0             | z (Axial)       | 3.27            | -30.67          | -49.67                | N/A                 | 33.94        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.69          | -49.68                |                     | 34.83        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 |                             | 50/28            | z (Axial)       | 3.27            | -29.92          | -49.67                | N/A                 | 33.19        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.11          | -49.68                |                     | 34.25        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 |                             | 50/56            | z (Axial)       | 3.27            | -31.72          | -49.67                | N/A                 | 34.99        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -41.23          | -49.68                |                     | 35.37        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 |                             | 100/0            | z (Axial)       | 3.27            | -31.09          | -49.67                | N/A                 | 34.36        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.86          | -49.68                |                     | 35.00        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 | 16QAM                       | 1/0              | z (Axial)       | 3.27            | -30.75          | -49.67                | N/A                 | 34.02        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.06          | -49.68                |                     | 34.20        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 | 64QAM                       | 1/0              | z (Axial)       | 3.27            | -31.03          | -49.67                | N/A                 | 34.30        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.20          | -49.68                |                     | 34.34        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 | 256QAM                      | 1/0              | z (Axial)       | 3.27            | -33.19          | -49.67                | N/A                 | 36.46        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -41.97          | -49.68                |                     | 36.11        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       |                 | 15 MHz                      | QPSK             | 1/0             | z (Axial)       | 3.27            | -30.41                | -49.67              | N/A          | 33.68         | T4            | 5.4, 7.9, 3.7 |               |
|                       |                       |                 |                             |                  |                 | y (Transversal) | -5.86           | -40.58                | -49.68              |              | 34.72         | T4            | 6.3, 2.1, 3.7 |               |
|                       |                       |                 |                             | 10 MHz           | QPSK            | 1/0             | z (Axial)       | 3.27                  | -30.71              | -49.67       | N/A           | 33.98         | T4            | 5.4, 7.9, 3.7 |
|                       |                       |                 |                             |                  |                 |                 | y (Transversal) | -5.86                 | -41.18              | -49.68       |               | 35.32         | T4            | 6.3, 2.1, 3.7 |
|                       |                       |                 |                             | 5 MHz            | QPSK            | 1/0             | z (Axial)       | 3.27                  | -30.80              | -49.67       | N/A           | 34.07         | T4            | 5.4, 7.9, 3.7 |
|                       |                       |                 |                             |                  |                 |                 | y (Transversal) | -5.86                 | -41.96              | -49.68       |               | 36.10         | T4            | 6.3, 2.1, 3.7 |
|                       | CH.344000 1720 MHz    | 20 MHz          | 16QAM                       | 1/0              | z (Axial)       | 3.27            | -30.90          | -49.67                | N/A                 | 34.17        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       | y (Transversal)       | -5.86           | -40.99                      |                  | -49.68          |                 | 35.13           | T4                    | 6.3, 2.1, 3.7       |              |               |               |               |               |
|                       | CH.354000 1770 MHz    | 20 MHz          | 16QAM                       | 1/0              | z (Axial)       | 3.27            | -30.40          | -49.67                | N/A                 | 33.67        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.50          | -49.68                |                     | 34.64        | T4            | 6.3, 2.1, 3.7 |               |               |
| NR Band n2 DFTs-OFDM  | CH.376000 1880 MHz    | 20 MHz          | QPSK                        | 1/0              | z (Axial)       | 3.27            | -28.50          | -49.25                | N/A                 | 31.77        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       | y (Transversal) |                             |                  | -5.86           | -38.90          | -49.24          |                       | 33.04               | T4           | 6.3, 2.1, 3.7 |               |               |               |
|                       |                       | 15 MHz          |                             |                  | z (Axial)       | 3.27            | -28.06          | -49.25                | N/A                 | 31.33        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       | y (Transversal) |                             |                  | -5.86           | -38.49          | -49.24          |                       | 32.63               | T4           | 6.3, 2.1, 3.7 |               |               |               |
|                       |                       | 10 MHz          |                             |                  | z (Axial)       | 3.27            | -27.76          | -49.25                | N/A                 | 31.03        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -37.40          | -49.24                |                     | 31.54        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       | 5 MHz           |                             |                  | z (Axial)       | 3.27            | -27.40          | -49.25                | N/A                 | 30.67        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -37.82          | -49.24                |                     | 31.96        | T4            | 6.3, 2.1, 3.7 |               |               |
| NR Band n5 DFTs-OFDM  | CH.167300 836.5 MHz   | 20 MHz          | QPSK                        | 1/0              | z (Axial)       | 3.27            | -34.33          | -49.25                | N/A                 | 37.60        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       | y (Transversal) |                             |                  | -5.86           | -42.04          | -49.24          |                       | 36.18               | T4           | 6.3, 2.1, 3.7 |               |               |               |
|                       |                       | 15 MHz          |                             |                  | z (Axial)       | 3.27            | -34.32          | -49.25                | N/A                 | 37.59        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       | y (Transversal) |                             |                  | -5.86           | -42.19          | -49.24          |                       | 36.33               | T4           | 6.3, 2.1, 3.7 |               |               |               |
|                       |                       | 10 MHz          |                             |                  | z (Axial)       | 3.27            | -35.37          | -49.25                | N/A                 | 38.64        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -42.20          | -49.24                |                     | 36.34        | T4            | 6.3, 2.1, 3.7 |               |               |
|                       |                       | 5 MHz           |                             |                  | z (Axial)       | 3.27            | -35.22          | -49.25                | N/A                 | 38.49        | T4            | 5.4, 7.9, 3.7 |               |               |
|                       |                       |                 |                             |                  | y (Transversal) | -5.86           | -40.93          | -49.24                |                     | 35.07        | T4            | 6.3, 2.1, 3.7 |               |               |

**OTT NR Air interface Investigation (Continued)**

| Mode:                  | Channel and Frequency | Bandwidth | Bandwidth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position      |
|------------------------|-----------------------|-----------|------------------------|------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|---------------|
| NR Band n66<br>CP-OFDM | CH.349000<br>1745 MHz | 20MHz     | QPSK                   | 1/0              | z (Axial)       | 3.27         | -31.08       | -49.67                | N/A                 | 34.35        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -40.90       | -49.68                |                     | 35.04        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           |                        | 1/53             | z (Axial)       | 3.27         | -31.14       | -49.67                | N/A                 | 34.41        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -41.15       | -49.68                |                     | 35.29        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           |                        | 1/104            | z (Axial)       | 3.27         | -32.88       | -49.67                | N/A                 | 36.15        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -41.85       | -49.68                |                     | 35.99        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           |                        | 53/0             | z (Axial)       | 3.27         | -32.67       | -49.67                | N/A                 | 35.94        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -41.78       | -49.68                |                     | 35.92        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           |                        | 53/26            | z (Axial)       | 3.27         | -31.57       | -49.67                | N/A                 | 34.84        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -41.03       | -49.68                |                     | 35.17        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           |                        | 53/53            | z (Axial)       | 3.27         | -33.54       | -49.67                | N/A                 | 36.81        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -41.77       | -49.68                |                     | 35.91        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           |                        | 106/0            | z (Axial)       | 3.27         | -33.18       | -49.67                | N/A                 | 36.45        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -41.93       | -49.68                |                     | 36.07        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           | 16QAM                  | 1/0              | z (Axial)       | 3.27         | -31.00       | -49.67                | N/A                 | 34.27        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -40.87       | -49.68                |                     | 35.01        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           | 64QAM                  | 1/0              | z (Axial)       | 3.27         | -31.81       | -49.67                | N/A                 | 35.08        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -40.16       | -49.68                |                     | 34.30        | T4       | 6.3, 2.1, 3.7 |
|                        |                       |           | 256QAM                 | 1/0              | z (Axial)       | 3.27         | -34.03       | -49.67                | N/A                 | 37.30        | T4       | 5.4, 7.9, 3.7 |
|                        |                       |           |                        |                  | y (Transversal) | -5.86        | -42.40       | -49.68                |                     | 36.54        | T4       | 6.3, 2.1, 3.7 |

**Note:**

Due to equipment limitations, ABM1 and Frequency Response measurements for NR were not possible. So, the worst-case ABM1 measurement from LTE FDD OTT VoIP testing for Axial, Transversal were combined with n2/n5 and n66 ABM2 measurement to obtain SNNR values.

## 9.9. HAC (T-coil) Test Results

| Mode:                                                   | Channel and Frequency                                                  | Bandwidth | Bandwidth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position        | Plot Page.# |
|---------------------------------------------------------|------------------------------------------------------------------------|-----------|------------------------|------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|-------------|
| GSM 850 Voice Coder Speech Codec: FR V1                 | CH.190 836.60 MHz                                                      |           |                        |                  | z (Axial)       | 8.15         | -20.71       | -50.30                | 1.86                | 28.86        | T3       | 8.3, 7.9, 3.7   | 1,2         |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -1.11        | -24.30       | -50.37                |                     | 23.19        | T3       | 8.3, 16.7, 3.7  | 3           |
| GSM 1900 Voice Coder Speech Codec: FR V1                | CH.661 1880.00 MHz                                                     |           |                        |                  | z (Axial)       | 7.63         | -28.96       | -50.30                | 1.82                | 36.59        | T4       | 8.3, 8.3, 3.7   | 4,5         |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -0.78        | -33.35       | -50.37                |                     | 32.57        | T4       | 8.3, 16.7, 3.7  | 6           |
| W-CDMA Band II Voice Narrow band AMR Codec: 12.2 kbit/s | CH.9400 1880.00 MHz                                                    |           |                        |                  | z (Axial)       | 6.93         | -35.30       | -50.44                | 2.00                | 42.23        | T4       | 8.3, 8.3, 3.7   | 7,8         |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -1.73        | -42.90       | -50.44                |                     | 41.17        | T4       | 8.3, 17.1, 3.7  | 9           |
| W-CDMA Band V Voice Narrow band AMR Codec: 12.2 kbit/s  | CH.4183 836.60 MHz                                                     |           |                        |                  | z (Axial)       | 7.03         | -34.95       | -50.44                | 2.00                | 41.98        | T4       | 8.3, 8.3, 3.7   | 10, 11      |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -1.74        | -42.76       | -50.44                |                     | 41.02        | T4       | 8.3, 17.1, 3.7  | 12          |
| LTE Band 2 Voice EVS SWB Codec: 24.4 kbit/s             | CH.18900 1880.0 MHz                                                    | 20 MHz    | 16QAM                  | 1/0              | z (Axial)       | -1.98        | -41.83       | -50.36                | 1.96                | 39.85        | T4       | 8.3, 8.3, 3.7   | 13, 14      |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -10.72       | -47.02       | -50.39                |                     | 36.30        | T4       | 8.3, 17.1, 3.7  | 15          |
| LTE Band 5 Voice EVS SWB Codec: 24.4 kbit/s             | CH.20525 836.5 MHz                                                     | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | -2.31        | -39.56       | -50.36                | 1.97                | 37.25        | T4       | 7.9, 7.9, 3.7   | 16,17       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -10.79       | -45.37       | -50.39                |                     | 34.58        | T4       | 7.9, 16.7, 3.7  | 18          |
| LTE Band 7 Voice EVS SWB Codec: 24.4 kbit/s             | CH.21100 2535 MHz                                                      | 20 MHz    | 16QAM                  | 1/0              | z (Axial)       | -0.84        | -41.56       | -50.42                | 2.00                | 40.72        | T4       | 8.3, 7.5, 3.7   | 19,20       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -9.76        | -45.77       | -50.48                |                     | 36.01        | T4       | 8.3, 15.4, 3.7  | 21          |
| LTE Band 12 Voice EVS SWB Codec: 24.4 kbit/s            | CH.23095 707.5 MHz                                                     | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | -2.52        | -39.31       | -50.36                | 1.98                | 36.79        | T4       | 7.9, 8.3, 3.7   | 22,23       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -10.65       | -44.65       | -50.39                |                     | 34.00        | T4       | 7.9, 16.7, 3.7  | 24          |
| LTE Band 13 Voice EVS SWB Codec: 24.4 kbit/s            | CH.23230 782 MHz                                                       | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | -2.35        | -39.14       | -50.36                | 1.91                | 36.79        | T4       | 7.9, 8.3, 3.7   | 25,26       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -10.95       | -45.15       | -50.39                |                     | 34.20        | T4       | 7.9, 16.7, 3.7  | 27          |
| LTE Band 66 Voice EVS SWB Codec: 24.4 kbit/s            | CH.132322 1745 MHz                                                     | 20 MHz    | 16QAM                  | 1/0              | z (Axial)       | -2.48        | -34.83       | -50.43                | 1.94                | 32.35        | T4       | 8.3, 7.9, 3.7   | 28, 29      |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -10.79       | -42.38       | -50.45                |                     | 31.59        | T4       | 8.3, 0, 3.7     | 30          |
| 802.11b                                                 | CH.6 2437 MHz                                                          | 20 MHz    | DSSS 1 Mbps            |                  | z (Axial)       | -3.89        | -43.44       | -50.36                | 1.70                | 39.55        | T4       | 8.3, 6.2, 3.7   | 31, 32      |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -11.49       | -46.99       | -50.39                |                     | 35.50        | T4       | 5, 0.4, 3.7     | 33          |
| 802.11a                                                 | CH.40 5200 MHz<br>CH.56 5280 MHz<br>CH.120 5600 MHz<br>CH.157 5785 MHz | 20 MHz    | BPSK 6 Mbps            |                  | z (Axial)       | -4.08        | -47.07       | -50.36                | 1.79                | 42.99        | T4       | 7.9, 7.9, 3.7   | 34,35       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -12.09       | -46.97       | -50.39                |                     | 34.88        | T4       | 10, 16.7, 3.7   | 36          |
|                                                         |                                                                        |           |                        |                  | z (Axial)       | -4.11        | -47.39       | -50.36                | 1.67                | 43.28        | T4       | 8.3, 8.3, 3.7   | 37,38       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -12.03       | -47.64       | -50.39                |                     | 35.61        | T4       | 8.3, 16.7, 3.7  | 39          |
|                                                         |                                                                        |           |                        |                  | z (Axial)       | -3.73        | -48.11       | -50.36                | 1.78                | 44.38        | T4       | 8.3, 8.3, 3.7   | 40,41       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -11.74       | -45.70       | -50.39                |                     | 33.96        | T4       | 11.7, 16.7, 3.7 | 42          |
|                                                         |                                                                        |           |                        |                  | z (Axial)       | -3.36        | -46.34       | -50.36                | 1.66                | 42.98        | T4       | 11.3, 8.3, 3.7  | 43,44       |
|                                                         |                                                                        |           |                        |                  | y (Transversal) | -11.98       | -47.67       | -50.39                |                     | 35.69        | T4       | 8.3, 16.7, 3.7  | 45          |

### Note:

The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19

## HAC (T-coil) Test Results (Continued)

| Mode:                                  | Channel and Frequency | Bandwidth | Bandwidth / Modulation | RB configuration | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Position        | Plot Page.# |
|----------------------------------------|-----------------------|-----------|------------------------|------------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|-------------|
| GSM850 EGPRS 2slots Codec : 6          | CH.190 836.6 MHz      |           |                        |                  | z (Axial)       | 4.58         | -26.53       | -50.40                | 2.00                | 31.11        | T4       | 8.3, 5.4, 3.7   | 46, 47      |
|                                        |                       |           |                        |                  | y (Transversal) | -4.61        | -29.89       | -50.46                |                     | 25.28        | T3       | 11.7, 15, 3.7   | 48          |
| GSM1900 EGPRS 2slots Codec : 6         | CH.661 1880.0 MHz     |           |                        |                  | z (Axial)       | 1.55         | -30.36       | -50.38                | 2.00                | 31.91        | T4       | 8.3, 7.9, 3.7   | 49,50       |
|                                        |                       |           |                        |                  | y (Transversal) | -4.82        | -40.25       | -50.42                |                     | 35.43        | T4       | 8.3, 2.9, 3.7   | 51          |
| WCDMA Band II HSUPA Subtest1 Codec : 6 | CH.9400 1880.0 MHz    |           |                        |                  | z (Axial)       | 2.27         | -48.87       | -50.42                | 2.00                | 51.14        | T4       | 8.3, 7.1, 3.7   | 52,53       |
|                                        |                       |           |                        |                  | y (Transversal) | -5.03        | -48.10       | -50.48                |                     | 43.07        | T4       | 8.3, 0, 3.7     | 54          |
| WCDMA Band V HSUPA Subtest1 Codec : 6  | CH.4183 836.6 MHz     |           |                        |                  | z (Axial)       | 2.64         | -49.36       | -50.42                | 2.00                | 52.00        | T4       | 10.4, 7.9, 3.7  | 55,56       |
|                                        |                       |           |                        |                  | y (Transversal) | -4.83        | -48.22       | -50.48                |                     | 43.39        | T4       | 9.2, 0, 3.7     | 57          |
| LTE Band 2 Codec : 6                   | CH.18900 1880 MHz     | 20MHz     | 16QAM                  | 1/0              | z (Axial)       | 3.27         | -40.37       | -50.42                | 2.00                | 43.64        | T4       | 5.4, 7.9, 3.7   | 58,59       |
|                                        |                       |           |                        |                  | y (Transversal) | -5.09        | -44.21       | -50.48                |                     | 39.12        | T4       | 7.9, 2.5, 3.7   | 60          |
| LTE Band 5 Codec : 6                   | CH.20525 836.5 MHz    | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | 5.26         | -37.72       | -50.42                | 2.00                | 42.98        | T4       | 8.3, 7.5, 3.7   | 61,62       |
|                                        |                       |           |                        |                  | y (Transversal) | -4.22        | -46.23       | -50.48                |                     | 42.01        | T4       | 4.6, 0, 3.7     | 63          |
| LTE Band 7 Codec : 6                   | CH.21100 2535 MHz     | 20MHz     | 16QAM                  | 1/0              | z (Axial)       | 5.70         | -41.42       | -50.42                | 2.00                | 47.12        | T4       | 8.3, 7.9, 3.7   | 64,65       |
|                                        |                       |           |                        |                  | y (Transversal) | -5.86        | -45.69       | -50.48                |                     | 39.83        | T4       | 6.3, 2.1, 3.7   | 66          |
| LTE Band 12 Codec : 6                  | CH.23095 707.5 MHz    | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | 4.63         | -39.42       | -50.42                | 2.00                | 44.05        | T4       | 8.3, 8.3, 3.7   | 67,68       |
|                                        |                       |           |                        |                  | y (Transversal) | -3.27        | -44.64       | -50.48                |                     | 41.37        | T4       | 8.3, 0, 3.7     | 69          |
| LTE Band 13 Codec : 6                  | CH.23230 782 MHz      | 10 MHz    | 16QAM                  | 1/0              | z (Axial)       | 4.38         | -38.38       | -50.42                | 1.59                | 42.76        | T4       | 7.9, 5.8, 3.7   | 70,71       |
|                                        |                       |           |                        |                  | y (Transversal) | -4.85        | -43.06       | -50.48                |                     | 38.21        | T4       | 12.1, -0.4, 3.7 | 72          |
| LTE Band 66 Codec : 6                  | CH.132322 1745 MHz    | 20 MHz    | 16QAM                  | 1/0              | z (Axial)       | 5.45         | -35.71       | -50.42                | 2.00                | 41.16        | T4       | 7.9, 7.9, 3.7   | 73,74       |
|                                        |                       |           |                        |                  | y (Transversal) | -4.49        | -39.98       | -50.48                |                     | 35.49        | T4       | 12.1, 0, 3.7    | 75          |
| NR Band n2                             | CH.376000 1880 MHz    | 5 MHz     | DFT-s-OFDM QPSK        | 1/0              | z (Axial)       | 3.27         | -27.40       | -49.25                | N/A                 | 30.67        | T4       | 5.4, 7.9, 3.7   | N/A         |
|                                        |                       |           |                        |                  | y (Transversal) | -5.86        | -37.82       | -49.24                |                     | 31.96        | T4       | 6.3, 2.1, 3.7   | N/A         |
| Wi-Fi 2.4 GHz Codec : 6                | CH.6 2437 MHz         | 20 MHz    | DSSS 1 Mbps            |                  | z (Axial)       | 3.33         | -37.09       | -50.40                | 2.00                | 40.42        | T4       | 7.5, 7.9, 3.7   | 76,77       |
|                                        |                       |           |                        |                  | y (Transversal) | -5.92        | -39.14       | -50.46                |                     | 33.22        | T4       | 10.8, 14.2, 3.7 | 78          |
| U-NII 1 Codec : 6                      | Ch.40 5200 MHz        | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 5.66         | -38.47       | -50.40                | 2.00                | 44.13        | T4       | 7.9, 4.6, 3.7   | 79,80       |
|                                        |                       |           |                        |                  | y (Transversal) | -2.00        | -43.28       | -50.46                |                     | 41.28        | T4       | 10, 16.7, 3.7   | 81          |
| U-NII 2A Codec : 6                     | Ch.56 5280 MHz        | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 6.85         | -43.06       | -50.40                | 2.00                | 49.91        | T4       | 8.3, 5.8, 3.7   | 82,83       |
|                                        |                       |           |                        |                  | y (Transversal) | -3.46        | -47.43       | -50.46                |                     | 43.97        | T4       | 8.3, 17.1, 3.7  | 84          |
| U-NII 2C Codec : 6                     | CH.120 5600 MHz       | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 4.69         | -39.34       | -50.40                | 2.00                | 44.03        | T4       | 8.3, 4.6, 3.7   | 85,86       |
|                                        |                       |           |                        |                  | y (Transversal) | -2.58        | -44.18       | -50.46                |                     | 41.60        | T4       | 11.7, 16.7, 3.7 | 87          |
| U-NII 3 Codec : 6                      | CH.157 5785 MHz       | 20MHz     | BPSK 6 Mbps            |                  | z (Axial)       | 2.98         | -40.04       | -50.40                | 2.00                | 43.02        | T4       | 8.3, 7.9, 3.7   | 88,89       |
|                                        |                       |           |                        |                  | y (Transversal) | -2.44        | -44.64       | -50.46                |                     | 42.20        | T4       | 10.4, 16.7, 3.7 | 90          |

### Note:

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19

## 9.10. Worst Case T-Coil Test Plot

Test Laboratory: UL Korea Ltd. Suwon Laboratory

Date: 2020-04-16.

### GSM

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3140; ; Calibrated: 2019-09-16

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn1447; Calibrated: 2020-03-20

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM850 Voice ch190 FR V1/y (transversal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z) (121x121x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.35

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm.

Cursor:

ABM1/ABM2 = 23.19 dB.


ABM1 = -1.11 dBA/m

ABM2 = -24.30 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 16.7, 3.7 mm.

↵

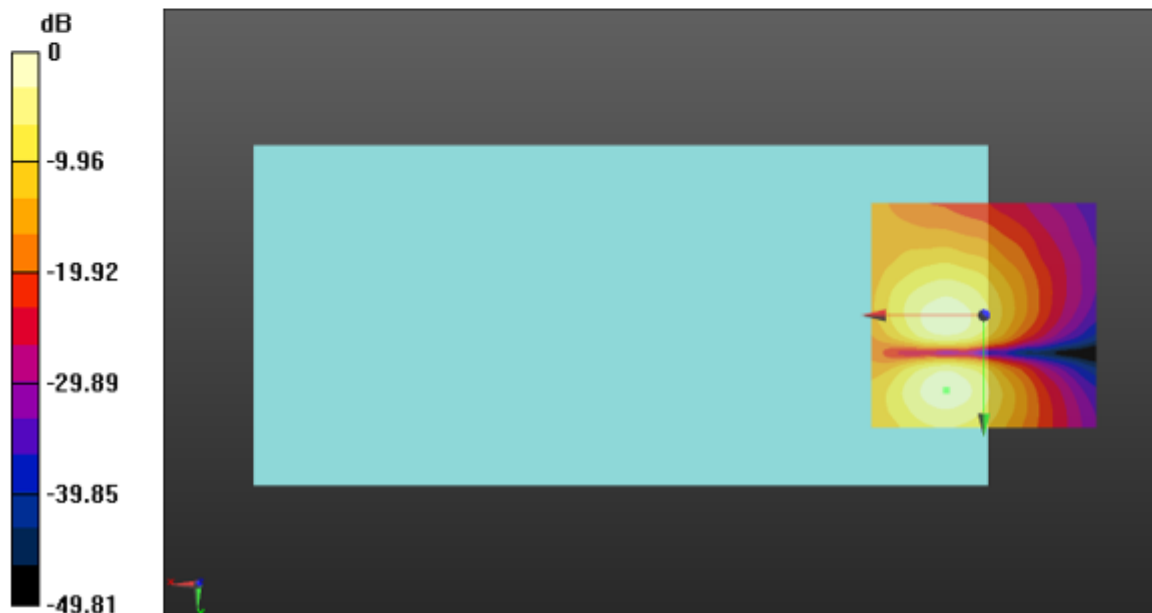

0 dB = 1,000 A/m = 0.00 dBA/m

## **Appendix**

**Refer to separated files for the following appendixes**

**4789424849-S3\_T-coil App A: Setup Photo**

**4789424849-S3\_T-coil App B: Test Plots**

**4789424849-S3\_T-coil App C: Probe Certificates**

**END OF REPORT**