



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E**

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-A800F

FCC ID: A3LSMA800F

REPORT NUMBER: 15K21022-E6

ISSUE DATE: JUNE 23, 2015

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by
**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

Rev.	Issue Date	Revisions	Revised By
--	06/23/15	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER (GSM)	7
5.3. MAXIMUM OUTPUT POWER (WCDMA)	7
5.1. MAXIMUM OUTPUT POWER (LTE).....	8
5.2. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. Summary Table	12
8. RF POWER OUTPUT VERIFICATION	13
8.1. GSM/GPRS/EDGE	13
8.1.1. GSM OUTPUT POWER RESULT.....	13
8.2. UMTS REL 99.....	14
8.2.1. WCDMA OUTPUT POWER RESULT	17
8.1. LTE OUTPUT VERIFICATION.....	18
8.1.1. LTE OUTPUT POWER RESULT	19
9. PEAK TO AVERAGE RATIO	20
9.1. CONDUCTED PEAK TO AVERAGE RESULT.....	20
9.2. CONDUCTED PEAK TO AVERAGE PLOTS.....	21
10. LIMITS AND CONDUCTED RESULTS.....	23
10.1. OCCUPIED BANDWIDTH.....	23
10.1.1. OCCUPIED BANDWIDTH RESULTS.....	23
10.1.2. OCCUPIED BANDWIDTH PLOTS	25
10.2. BAND EDGE EMISSIONS	30
10.2.1. BAND EDGE PLOTS	32
10.3. OUT OF BAND EMISSIONS	37
10.3.1. OUT OF BAND EMISSIONS RESULT	37

10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	39
10.4.	<i>FREQUENCY STABILITY</i>	44
10.4.1.	FREQUENCY STABILITY RESULTS.....	45
11.	RADIATED TEST RESULTS	46
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	46
11.1.1.	ERP/EIRP Results.....	47
11.1.2.	ERP/EIRP DATA.....	48
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	53
11.2.1.	SPURIOUS RADIATION PLOTS.....	54
12.	SETUP PHOTOS	59

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone+Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+
MODEL NUMBER: SM-A800F
SERIAL NUMBER: R38G608CSVE, 4100e2844799149 (RADIATED);
R38G608CSVE, 4100855ef27d91c3 (CONDUCTED)
DATE TESTED: JUN 06 - JUN 23, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☐ Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone+Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+.

5.2. MAXIMUM OUTPUT POWER (GSM)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range [MHz]	Modulation Peak	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
GSM850	824~849	GMSK	32.32	1706.87		
		GPRS	32.34	1713.56	23.86	243.22
		EGPRS	26.30	426.35	17.51	56.36
GSM1900	1850~1910	GMSK	29.22	834.92		
		GPRS	29.21	833.71	28.92	779.83
		EGPRS	25.32	340.36	23.43	220.29

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range [MHz]	Modulation Peak	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	824~849	REL99	22.00	158.49	10.38	10.91
		HSDPA	21.98	157.76	11.52	14.19
		HSUPA	21.98	157.76		
		DC-HSDPA	22.00	158.49		
Band 2	1850~1910	REL99	21.65	146.22	21.76	149.97
		HSDPA	21.62	145.21	21.44	139.32
		HSUPA	21.60	144.54		
		DC-HSDPA	21.68	147.23		

5.1. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

LTE Band 5

FCC Part 22							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation Peak	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	824 ~ 849	10	QPSK	23.02	200.45	8.69	7.40
			16QAM	22.38	172.98	7.84	6.08
		5	QPSK	22.92	195.88	9.47	8.85
			16QAM	22.06	160.69	8.80	7.59
		3	QPSK	23.04	201.37	10.42	11.02
			16QAM	22.36	172.19	9.88	9.73
		1.4	QPSK	22.96	197.70	10.85	12.16
			16QAM	22.31	170.22	9.85	9.66

DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a FPCB antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM 850 / WCDMA Band 5 / LTE Band 5 824 ~ 849 MHz	-1.9
GSM 1900 / WCDMA Band 2 1850 ~ 1910 MHz	4.2

5.2. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12UWE	N/A	N/A
Data Cable	SAMSUNG	EP-DG920UWE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

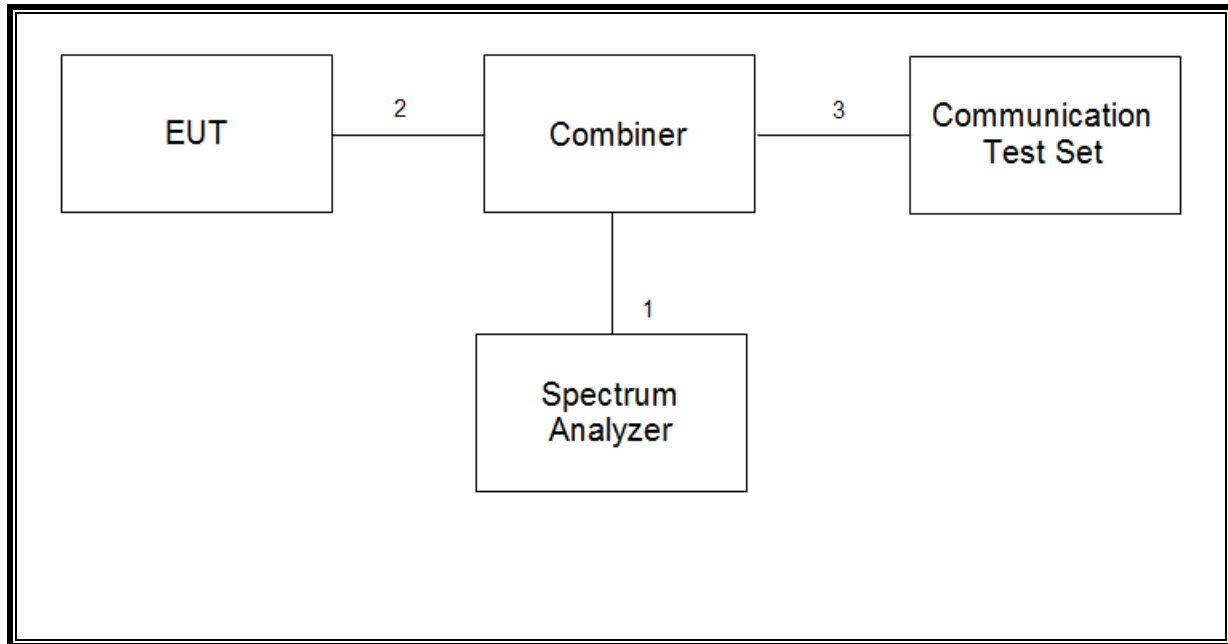

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

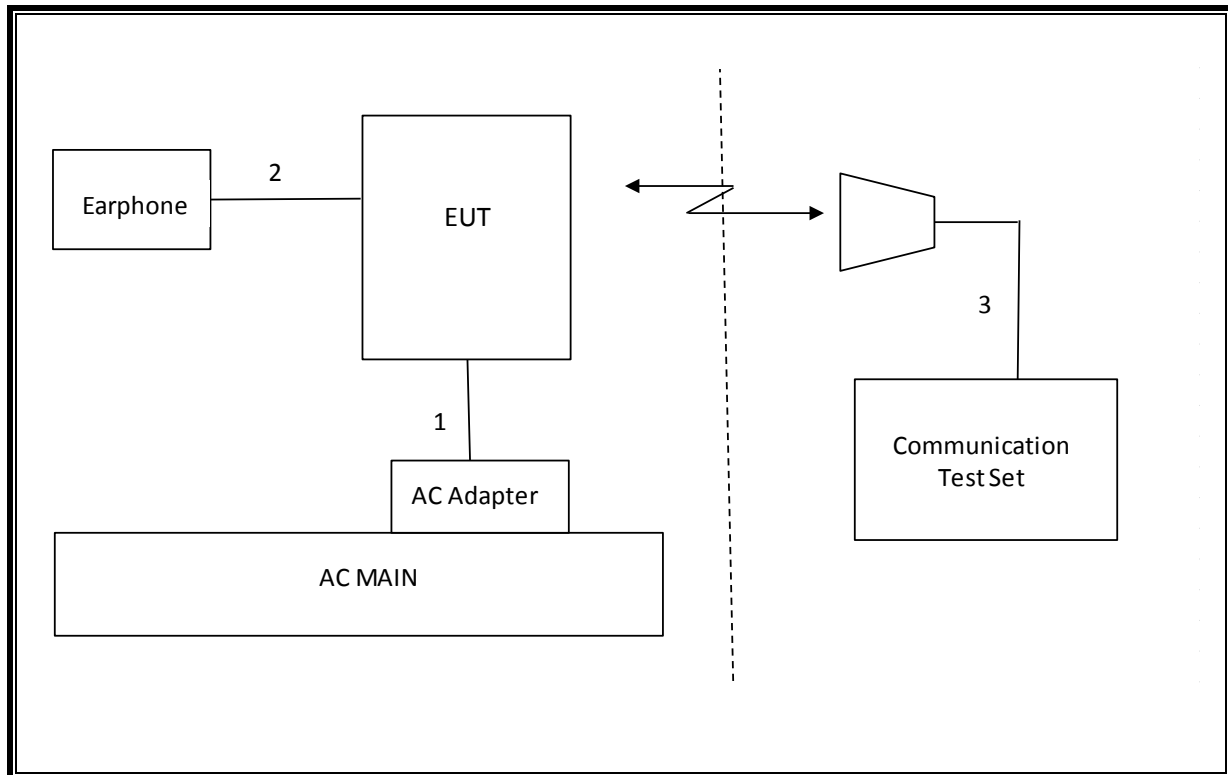

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	07-29-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	950	11-17-15
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	11-17-15
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	11-18-15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	09-23-15
Communications Test Set	R&S	CMW500	150312	08-13-15
Average Power Sensor	R&S	NRZ-Z91	102681	11-17-15
Average Power Sensor	Agilent / HP	U2000	MY54270007	09-23-15
EMI Test Receive, 40 GHz	R&S	ESU40	100439	11-17-15
EMI Test Receive, 3 GHz	R&S	ESR3	101832	11-17-15
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	11-17-15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	11-17-15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	11-17-15
Combiner	WEINSCHTEL	1575	2153	11-17-15
Temperature Chamber	ESPEC	SH-642	93001109	11-13-15
DC Power Supply	Agilent / HP	E3640A	MY54226395	09-23-15

7. Summary Table

The FCC ID: A3LSMA800F and A3LSMA800YZ have the same PCB design, all the chipset, component including antennas are same.

A3LSMA800F supports LTE Band 5.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA800YZ remains representative of FCC ID: A3LSMA800F, test data for FCC ID: A3LSMA800YZ is being submitted for this application to cover GSM850, GSM1900, WCDMA Band 2, WCDMA Band5 features.

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	8.986MHz
22.917(a) 24.238(a)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-16.23dBm
2.1046	Conducted output power	N/A		Pass	32.34dBm
22.355 24.235	Frequency Stability	2.5PPM		Pass	0.011PPM
22.913(a)(2)	Effective Radiated Power	38 dBm	Radiated	Pass	23.86dBm
24.232(c)	Equivalent Isotropic Radiated Power	33dBm		Pass	28.92dBm
22.917(a) 24.238(a)	Radiated Spurious Emission	-13dBm		Pass	-29.7dBm

FCC Rule Part	Frequency Range [MHz]	Output Power [W]	Frequency Tolerance	Emission Designator	Emission Bandwidth	Communication Type
GSM						
22H	824.2 - 848.8	0.243	2.5 ppm	243KGXW	243kHz	GPRS850
	824.2 - 848.8	0.056	2.5 ppm	247KG7W	247kHz	EGPRS850
24E	1850.2 - 1909.8	0.780	2.5 ppm	245KGXW	245kHz	GSM1900
	1850.2 - 1909.8	0.220	2.5 ppm	246KG7W	246kHz	EGSM1900
WCDMA						
22H	826.4 - 846.6	0.014	2.5 ppm	4M14F9W	4.144MHz	WCDMA BAND5
24E	1852.4 - 1907.6	0.150	2.5 ppm	4M15F9W	4.154MHz	WCDMA BAND2
LTE Band 5						
22H	829.0 - 844.0	0.007	2.5 ppm	8M98G7D	8.976MHz	QPSK
22H	829.0 - 844.0	0.006	2.5 ppm	8M99D9W	8.986MHz	16QAM
22H	824.7 - 848.3	0.012	2.5 ppm	1M10G7D	1.095MHz	QPSK
22H	825.5 - 847.5	0.010	2.5 ppm	2M70D9W	2.704MHz	16QAM

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

GSM850 Measured Results

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

GSM1900 Measured Results

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

8.2. UMTS REL 99

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

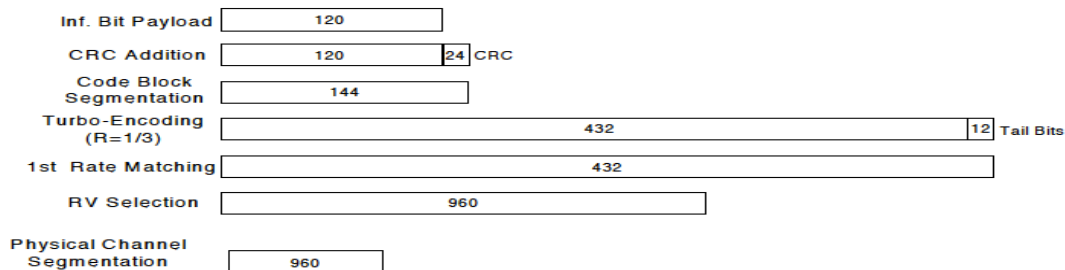


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

8.2.1. WCDMA OUTPUT POWER RESULT

WCDMA Band 5 Measured Results

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA Band 2 Measured Results

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

8.1. LTE OUTPUT VERIFICATION

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

8.1.1. LTE OUTPUT POWER RESULT

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.97	22.81	22.97
			1	25	0	23.01	22.84	23.02
			1	49	0	23.00	22.81	22.90
			25	0	1	21.70	21.55	21.66
			25	12	1	21.74	21.56	21.73
			25	25	1	21.72	21.48	21.73
		16QAM	50	0	1	21.67	21.60	21.61
			1	0	1	22.02	21.91	22.38
			1	25	1	21.94	21.86	22.36
			1	49	1	21.96	21.84	22.27
			25	0	2	20.59	20.51	20.69
			25	12	2	20.63	20.52	20.67
			25	25	2	20.62	20.44	20.67
			50	0	2	20.57	20.53	20.61
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.74	22.92	22.83
			1	12	0	22.67	22.89	22.88
			1	24	0	22.80	22.81	22.79
			12	0	1	21.64	21.59	21.60
			12	7	1	21.52	21.45	21.61
			12	13	1	21.47	21.41	21.62
		16QAM	25	0	1	21.53	21.47	21.53
			1	0	1	21.86	22.06	21.89
			1	12	1	21.80	21.98	21.89
			1	24	1	21.93	22.03	21.85
			12	0	2	20.42	20.38	20.51
			12	7	2	20.31	20.35	20.53
			12	13	2	20.39	20.32	20.56
			25	0	2	20.53	20.43	20.54
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.79	22.89	23.04
			1	8	0	22.77	22.82	22.99
			1	14	0	22.80	22.87	22.92
			8	0	1	21.61	21.62	21.67
			8	4	1	21.46	21.49	21.62
			8	7	1	21.51	21.54	21.63
		16QAM	15	0	1	21.49	21.52	21.60
			1	0	1	21.99	22.32	22.36
			1	8	1	21.92	22.16	22.32
			1	14	1	21.97	22.18	22.27
			8	0	2	20.41	20.47	20.63
			8	4	2	20.39	20.43	20.64
			8	7	2	20.33	20.45	20.61
			15	0	2	20.45	20.40	20.45
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.80	22.83	22.96
			1	3	0	22.82	22.86	22.88
			1	5	0	22.85	22.80	22.86
			3	0	0	22.69	22.62	22.78
			3	1	0	22.59	22.60	22.78
			3	3	0	22.53	22.72	22.75
		16QAM	6	0	1	21.47	21.57	21.62
			1	0	1	22.27	22.06	22.30
			1	3	1	22.24	22.08	22.27
			1	5	1	22.31	22.06	22.30
			3	0	1	21.51	21.61	21.80
			3	1	1	21.47	21.45	21.70
			3	3	1	21.44	21.60	21.71
			6	0	2	20.47	20.32	20.60

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

Band	BW [MHz]	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 5	10	20525	836.5	QPSK	4.15	13.00
				16QAM	5.20	
	5			QPSK	4.18	
				16QAM	4.89	
	3			QPSK	4.20	
				16QAM	5.37	
	1.4			QPSK	4.13	
				16QAM	4.91	

9.2. CONDUCTED PEAK TO AVERAGE PLOTS


GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

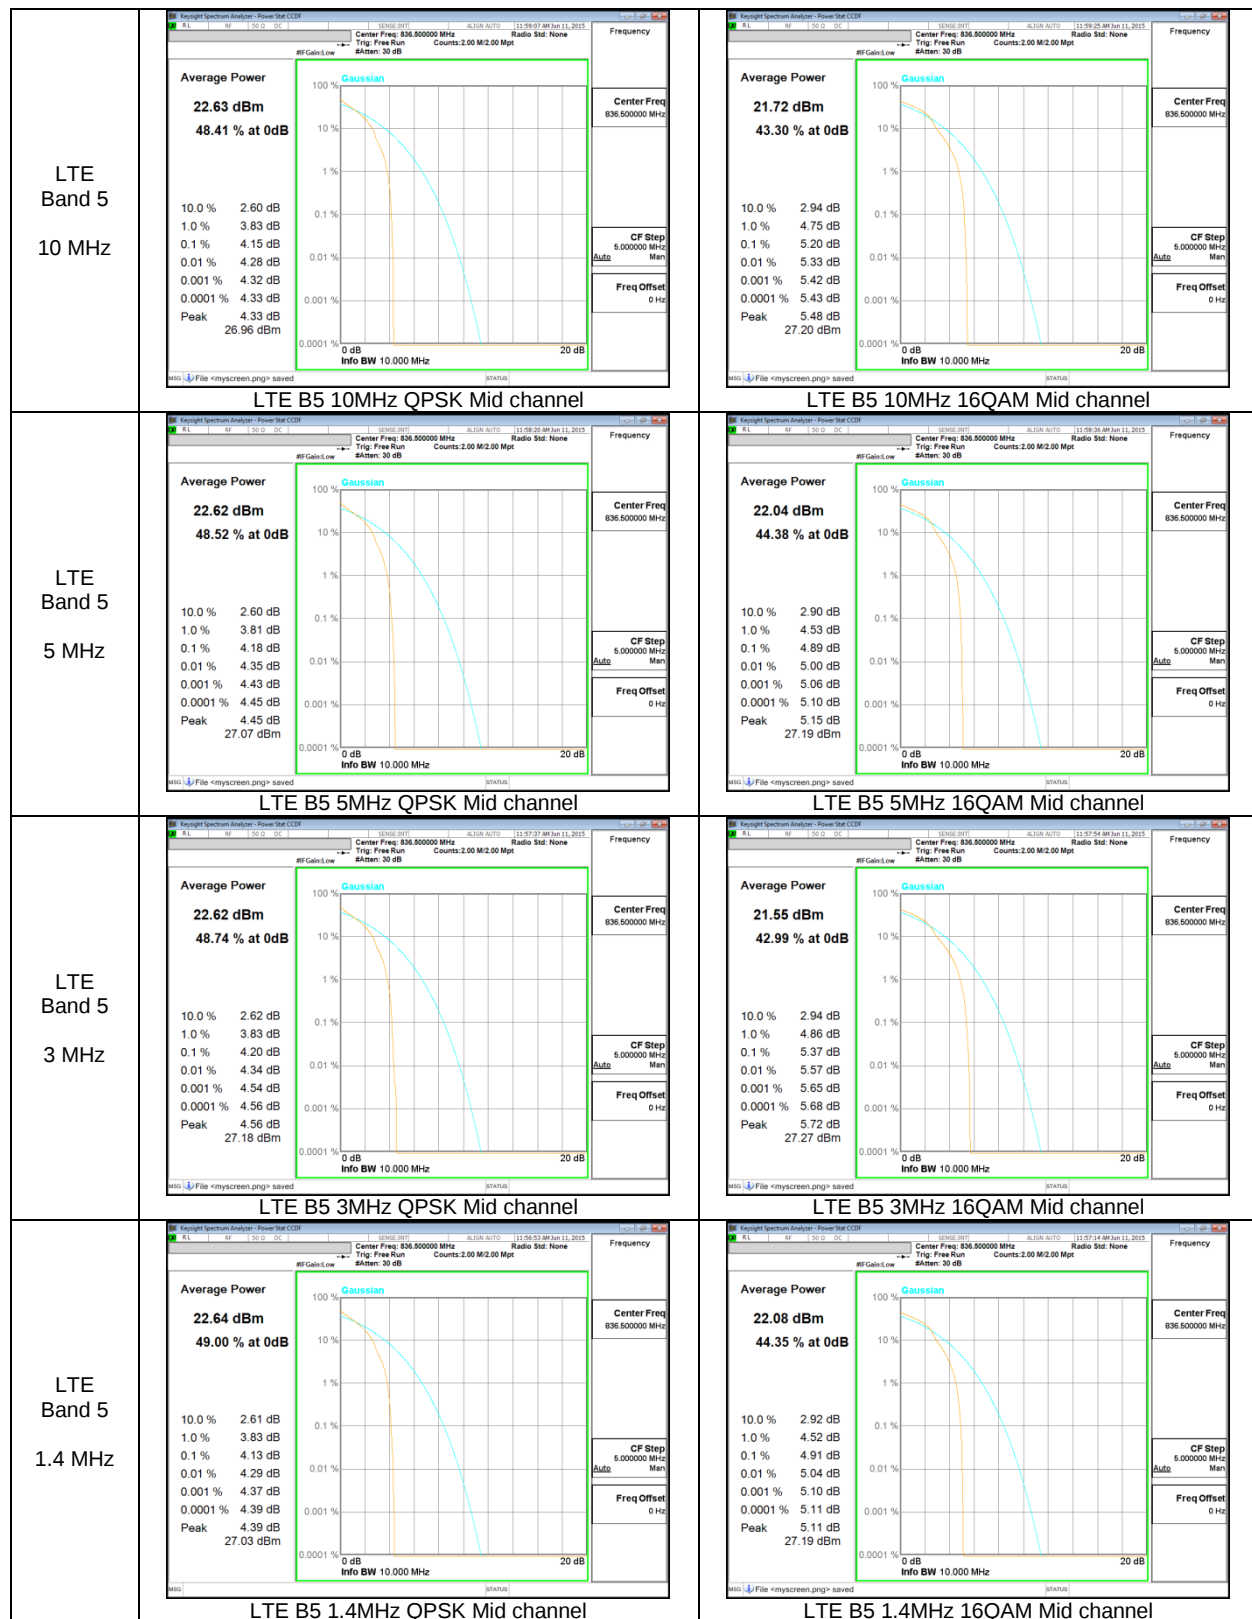

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

Band	BW [MHz]	Channel	f [MHz]	Mode	99% BW [MHz]	26dB BW [MHz]
Band 5	10	20450	829.0	QPSK	8.986	10.390
				16QAM	8.974	10.130
		20524	836.5	QPSK	8.927	9.994
				16QAM	8.934	9.905
		20599	844.0	QPSK	8.967	10.070
				16QAM	8.976	10.300
	5	20425	826.5	QPSK	4.513	5.253
				16QAM	4.516	5.379
		20524	836.5	QPSK	4.506	5.169
				16QAM	4.498	5.288
		20624	846.5	QPSK	4.498	5.277
				16QAM	4.501	5.217
	3	20415	825.5	QPSK	2.703	3.100
				16QAM	2.704	3.040
		20524	836.5	QPSK	2.700	3.088
				16QAM	2.700	3.102
		20634	847.5	QPSK	2.702	3.046
				16QAM	2.700	3.063
	1.4	20407	824.7	QPSK	1.090	1.342
				16QAM	1.092	1.397
		20524	836.5	QPSK	1.086	1.279
				16QAM	1.088	1.294
		20624	848.3	QPSK	1.095	1.373
				16QAM	1.092	1.364

10.1.2. OCCUPIED BANDWIDTH PLOTS


GSM


Please refer to WWAN test report of FCC ID: A3LSMA800YZ


WCDMA


Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

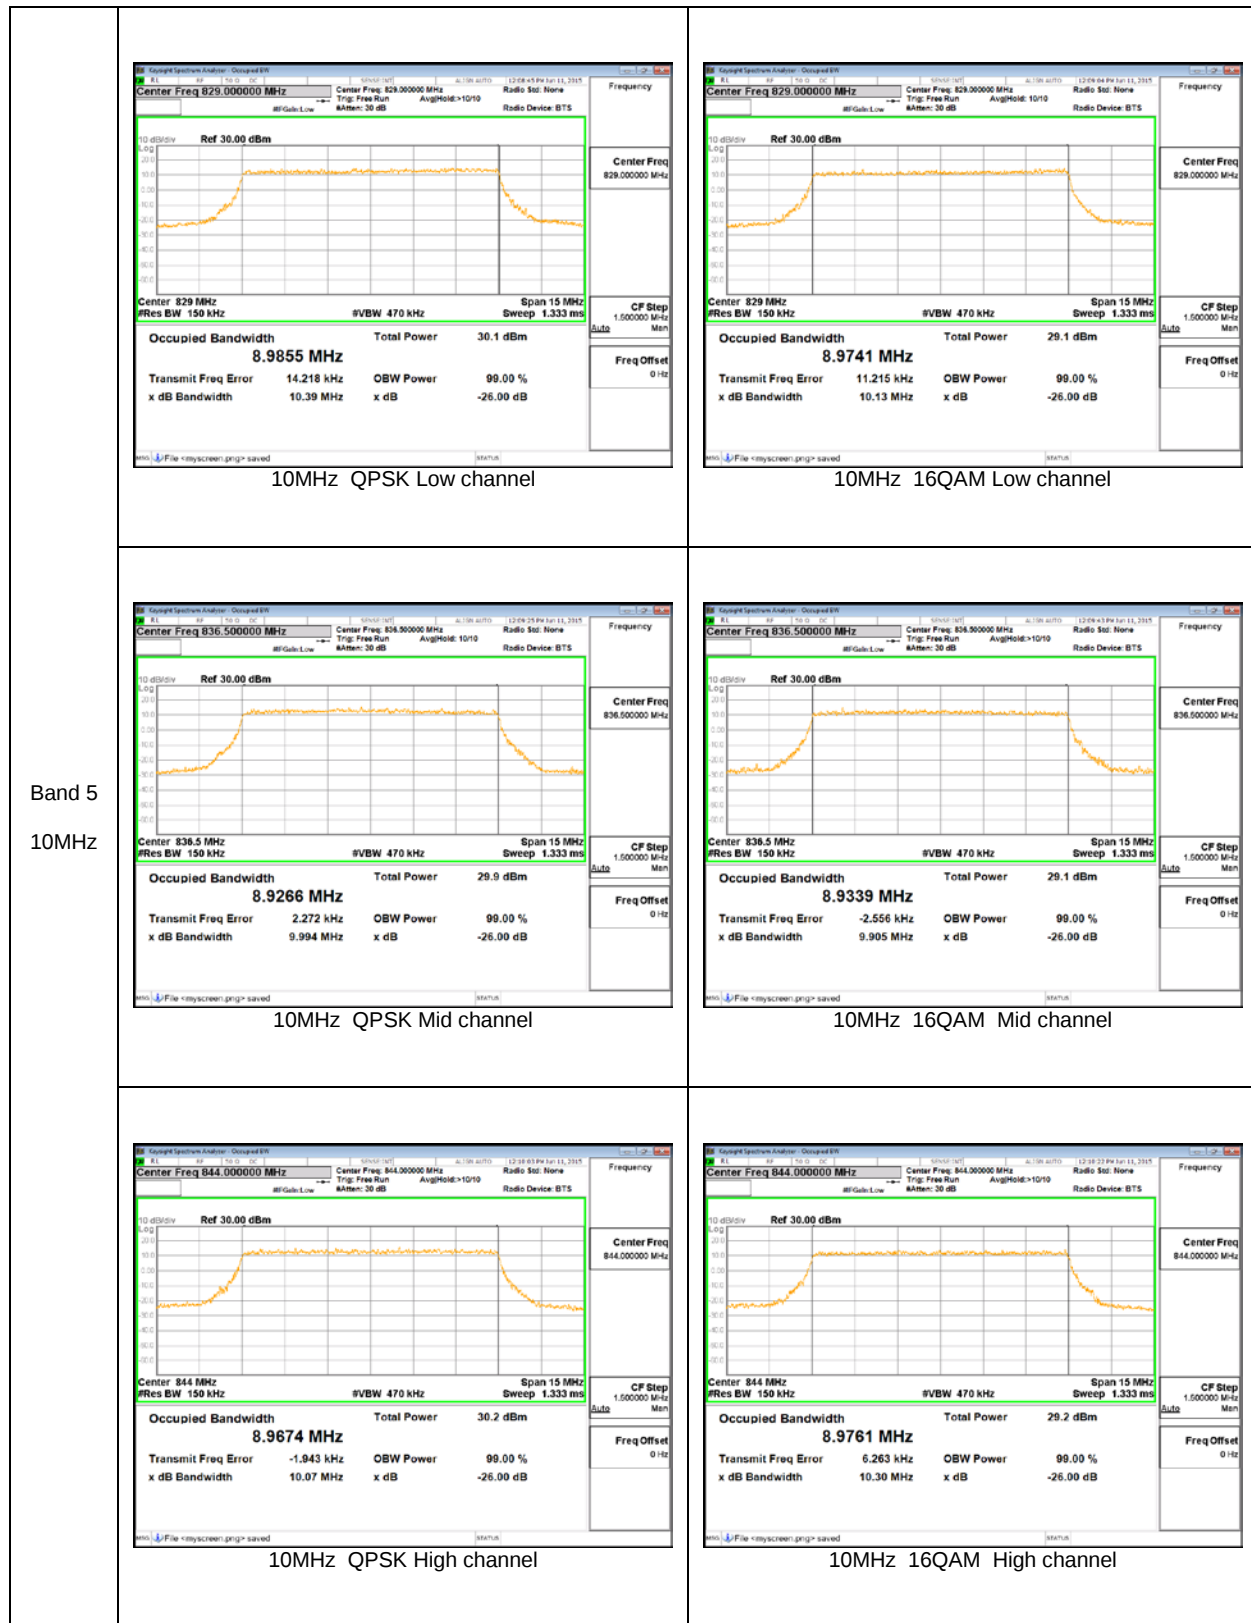

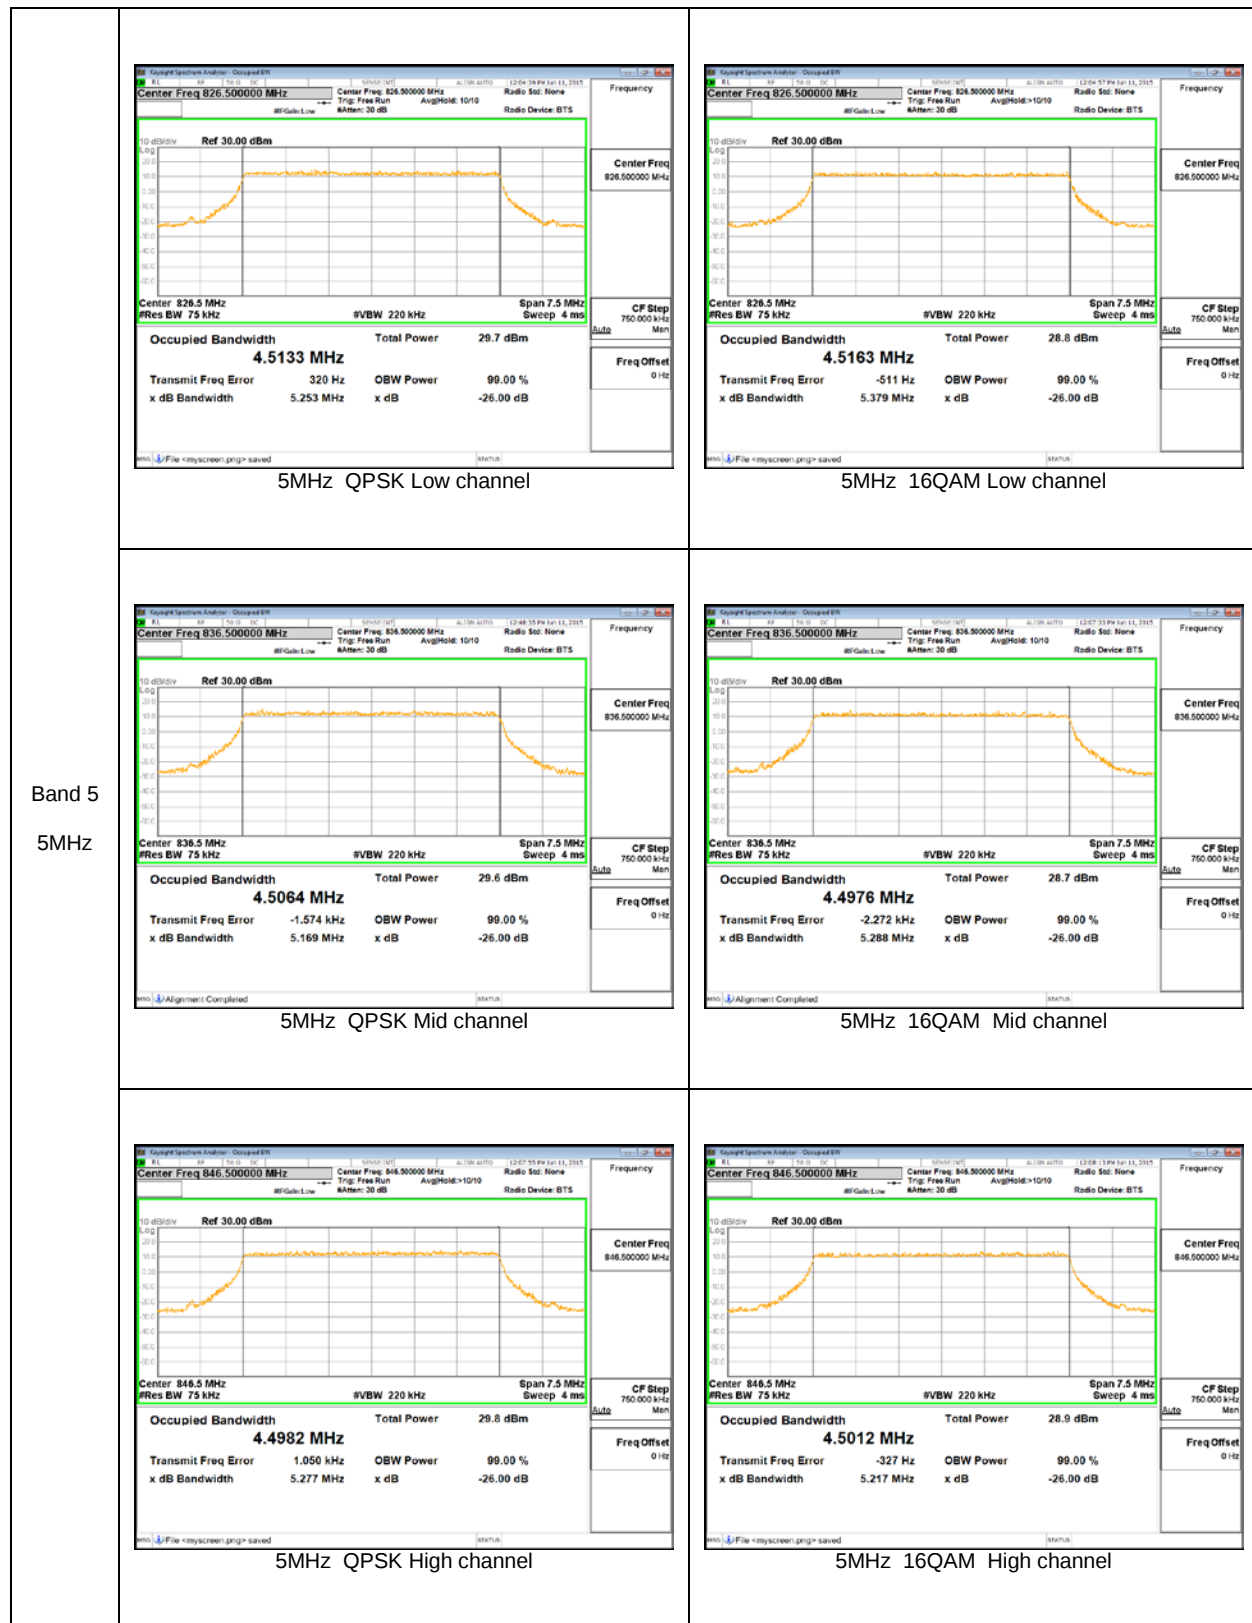

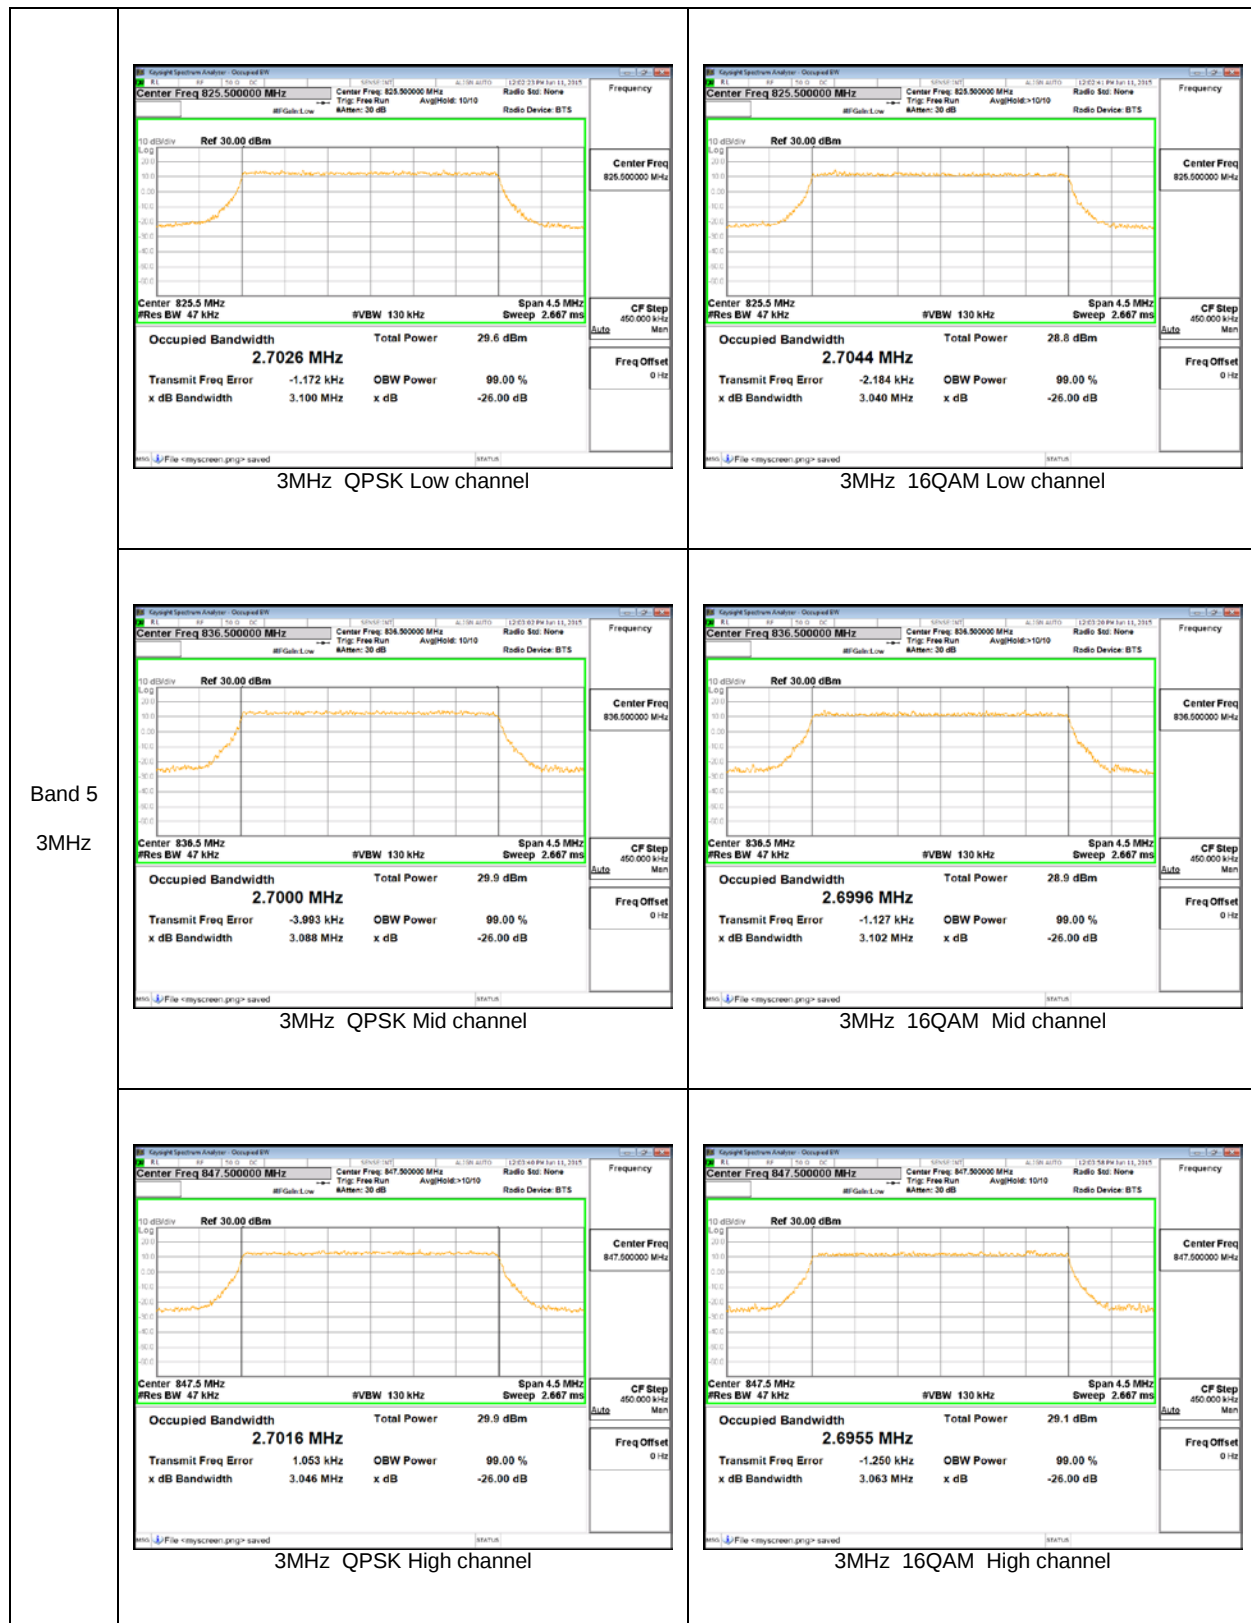

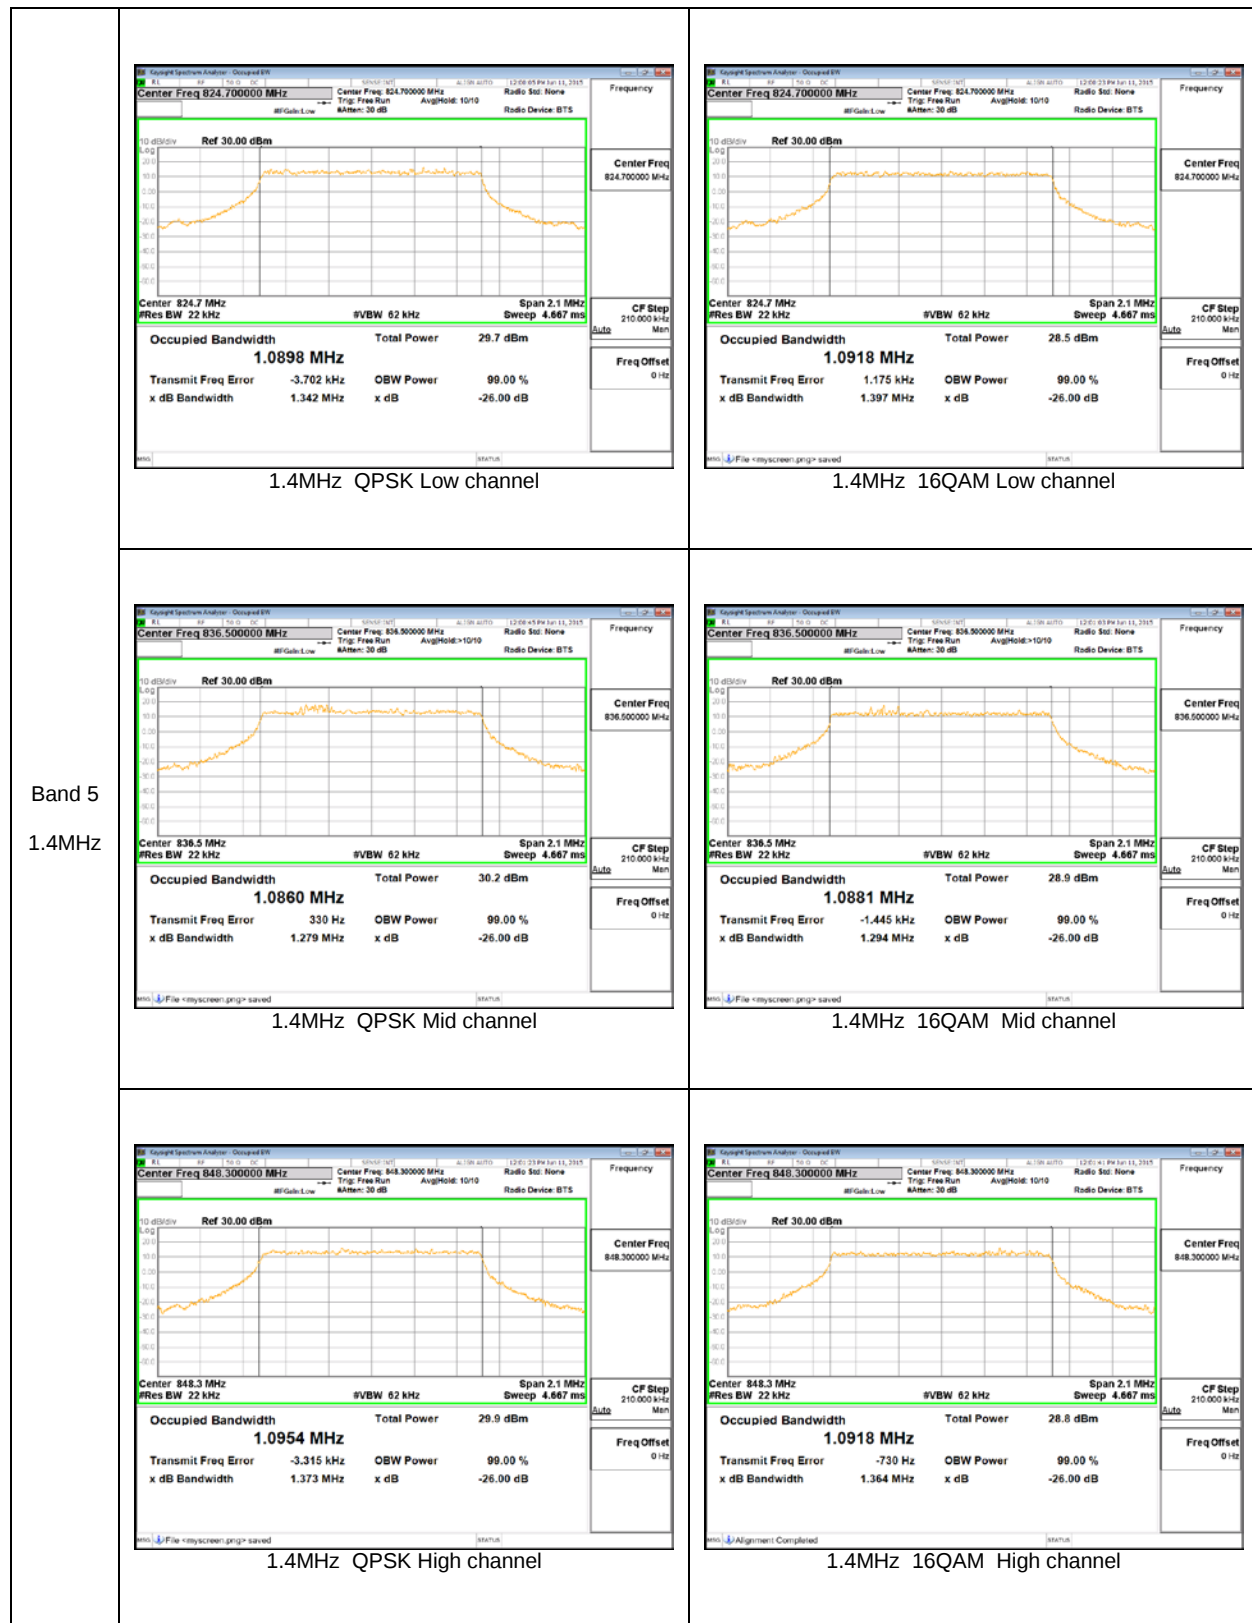

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE 5

Bandwidth	Mode	Side	RB Status	f [MHz]	Level [dBm]	Limit [dBm]
10 MHz	QPSK	Lower	1RB	824.000	-30.895	-13.00
			FRB	824.000	-27.319	
		Upper	1RB	849.000	-26.463	
			FRB	849.000	-26.606	
	16QAM	Lower	1RB	824.000	-28.926	
			FRB	824.000	-28.378	
		Upper	1RB	849.000	-29.317	
			FRB	849.000	-29.537	
5 MHz	QPSK	Lower	1RB	824.000	-22.412	
			FRB	824.000	-25.605	
		Upper	1RB	849.000	-17.682	
			FRB	849.000	-23.663	
	16QAM	Lower	1RB	824.000	-20.375	
			FRB	824.000	-25.687	
		Upper	1RB	849.000	-19.486	
			FRB	849.000	-26.660	
3 MHz	QPSK	Lower	1RB	824.000	-17.624	
			FRB	824.000	-22.486	
		Upper	1RB	849.000	-17.169	
			FRB	849.000	-23.953	
	16QAM	Lower	1RB	824.000	-18.951	
			FRB	824.000	-22.926	
		Upper	1RB	849.000	-16.230	
			FRB	849.000	-24.063	
1.4 MHz	QPSK	Lower	1RB	824.000	-21.639	
			FRB	824.000	-22.052	
		Upper	1RB	849.000	-21.221	
			FRB	849.000	-22.543	
	16QAM	Lower	1RB	824.000	-22.952	
			FRB	824.000	-24.475	
		Upper	1RB	849.000	-23.242	
			FRB	849.000	-23.163	

10.2.1. BAND EDGE PLOTS


GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ


WCDMA


Please refer to WWAN test report of FCC ID: A3LSMA800YZ


LTE Band 5

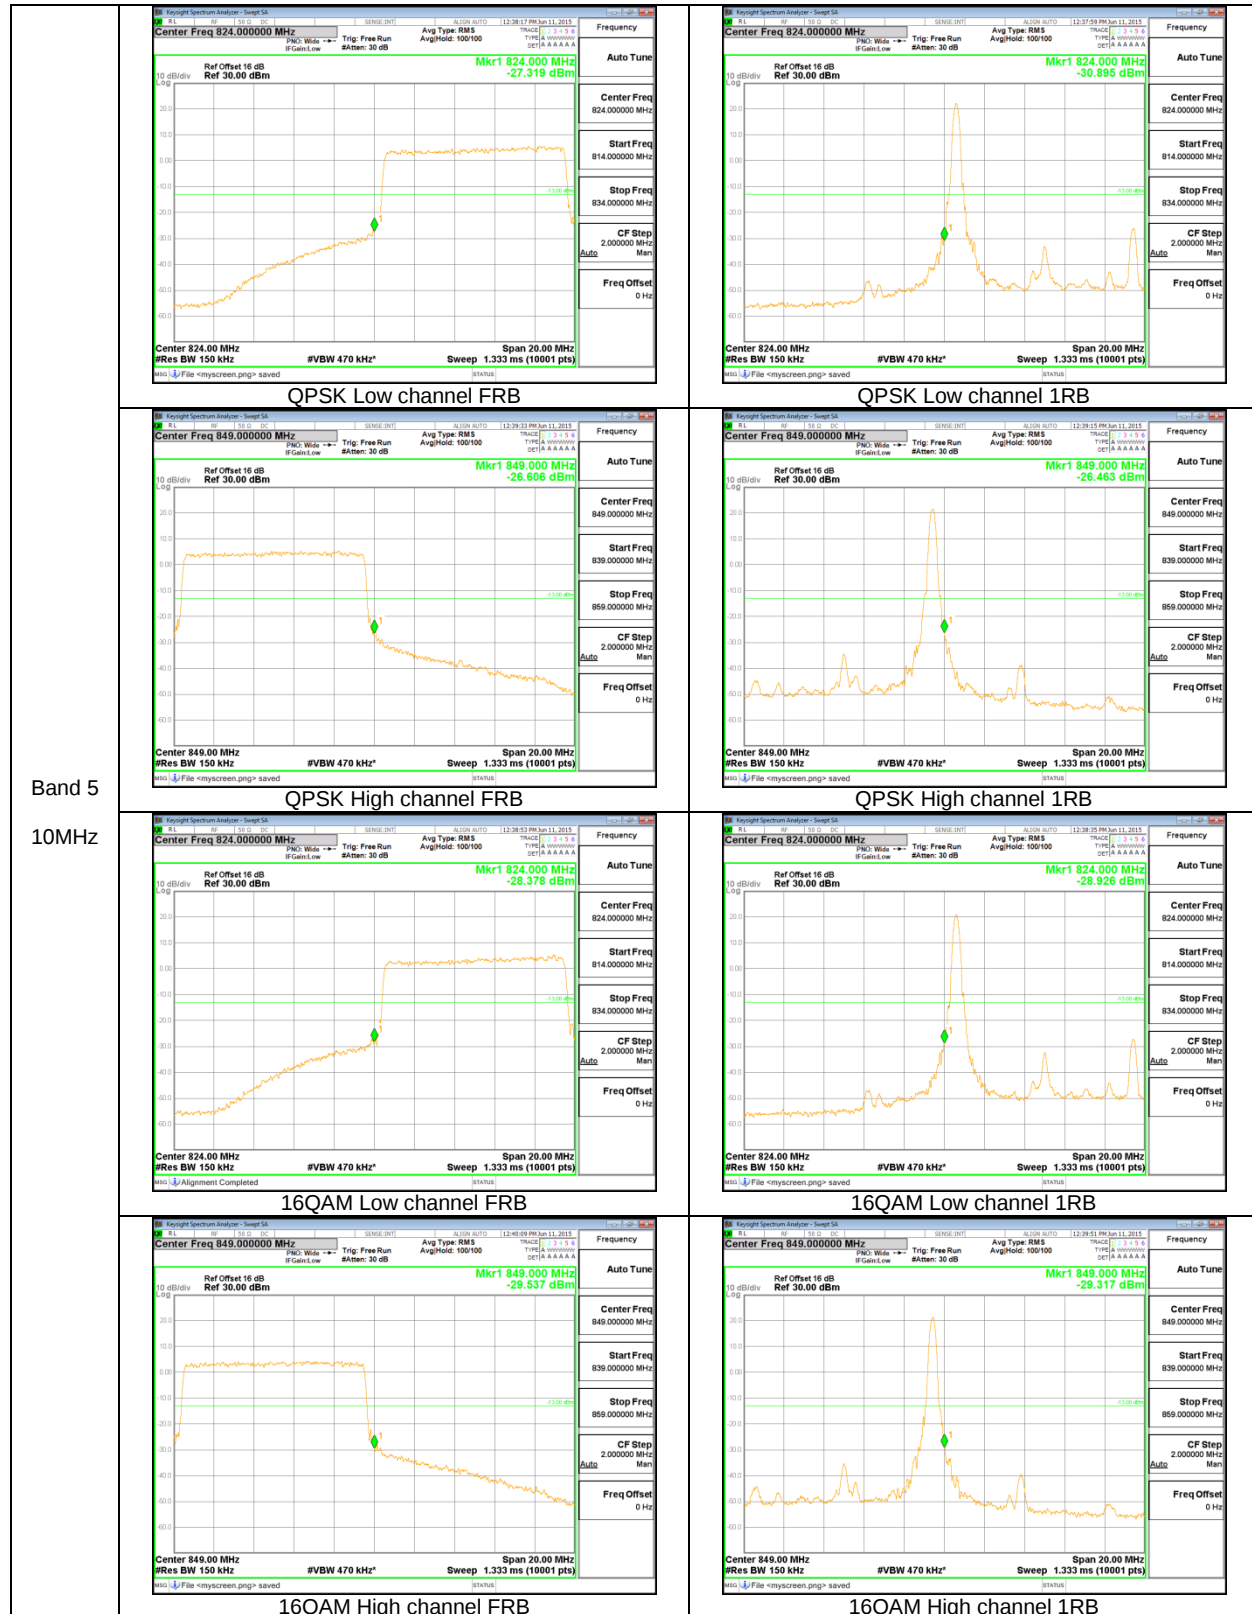

Band 5
10MHz

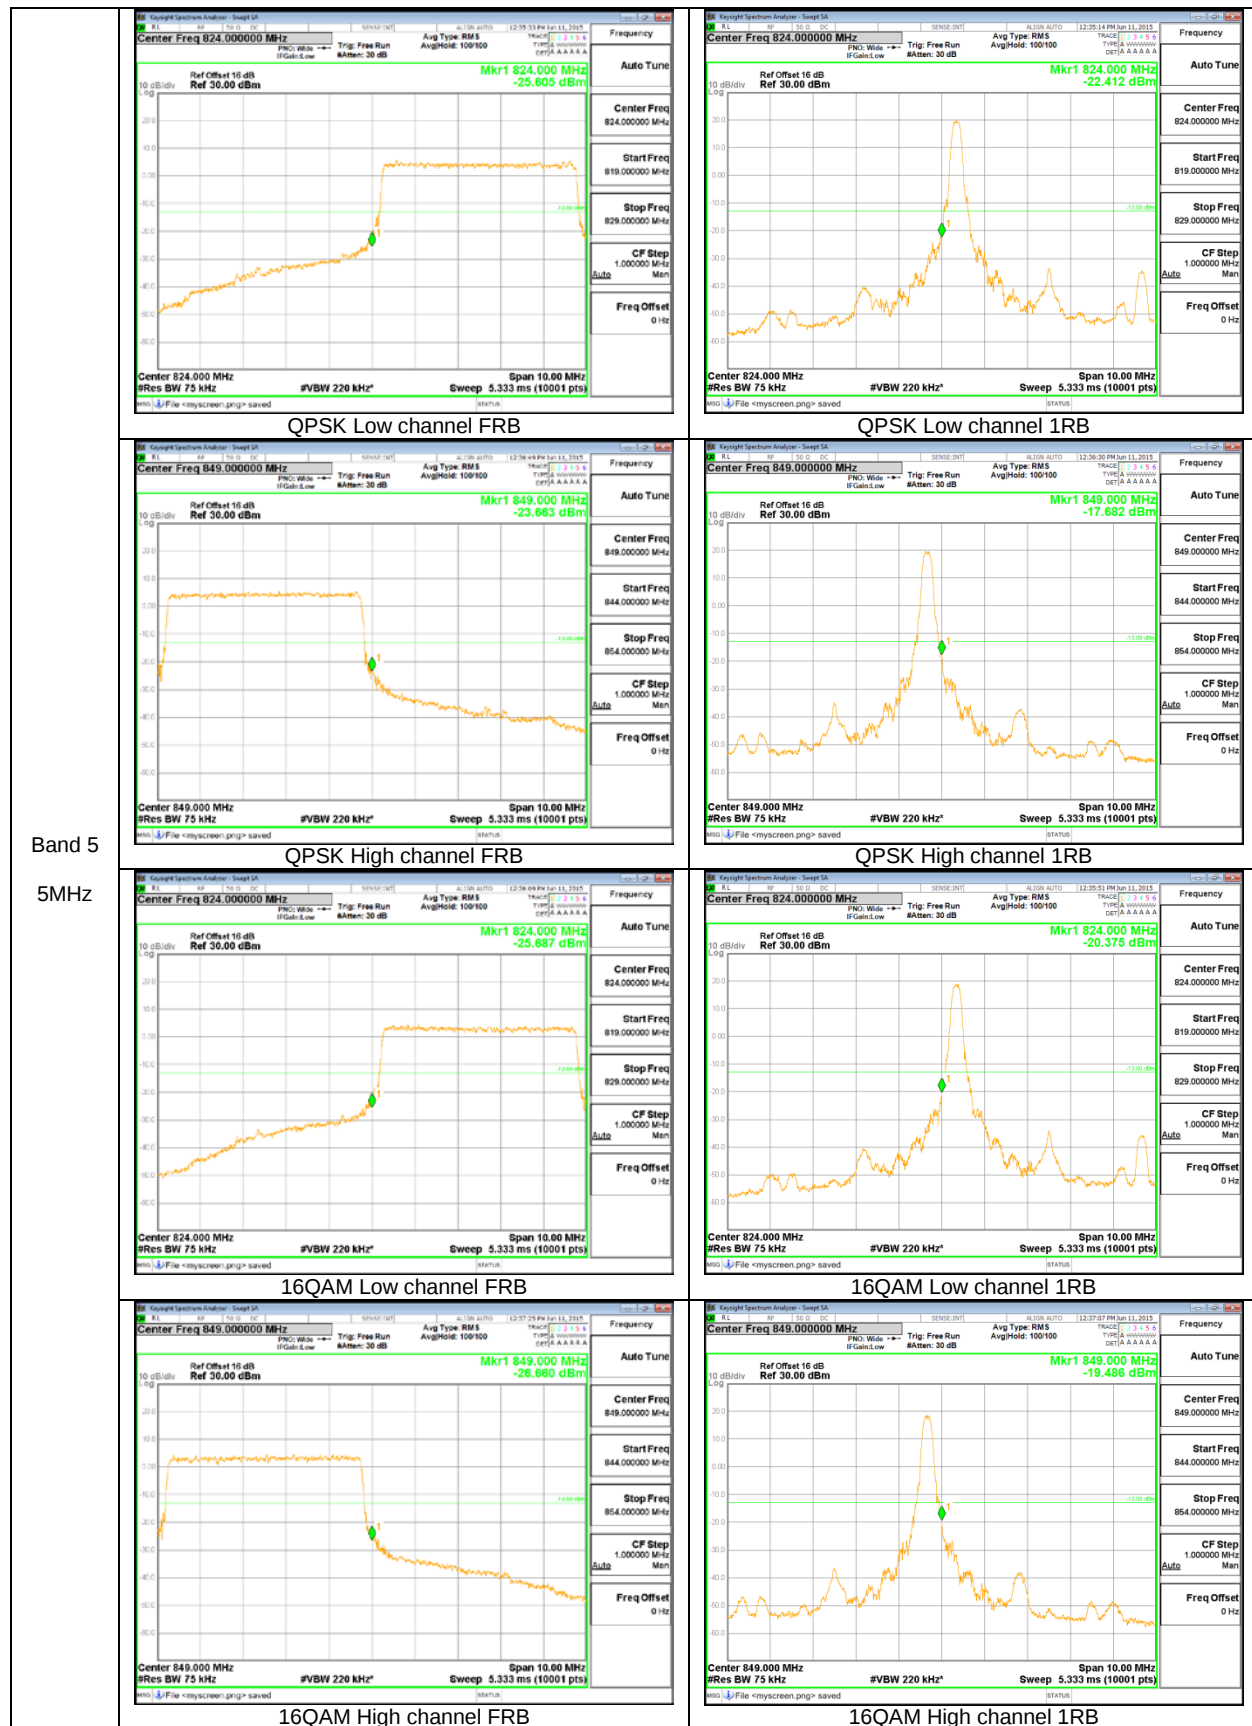

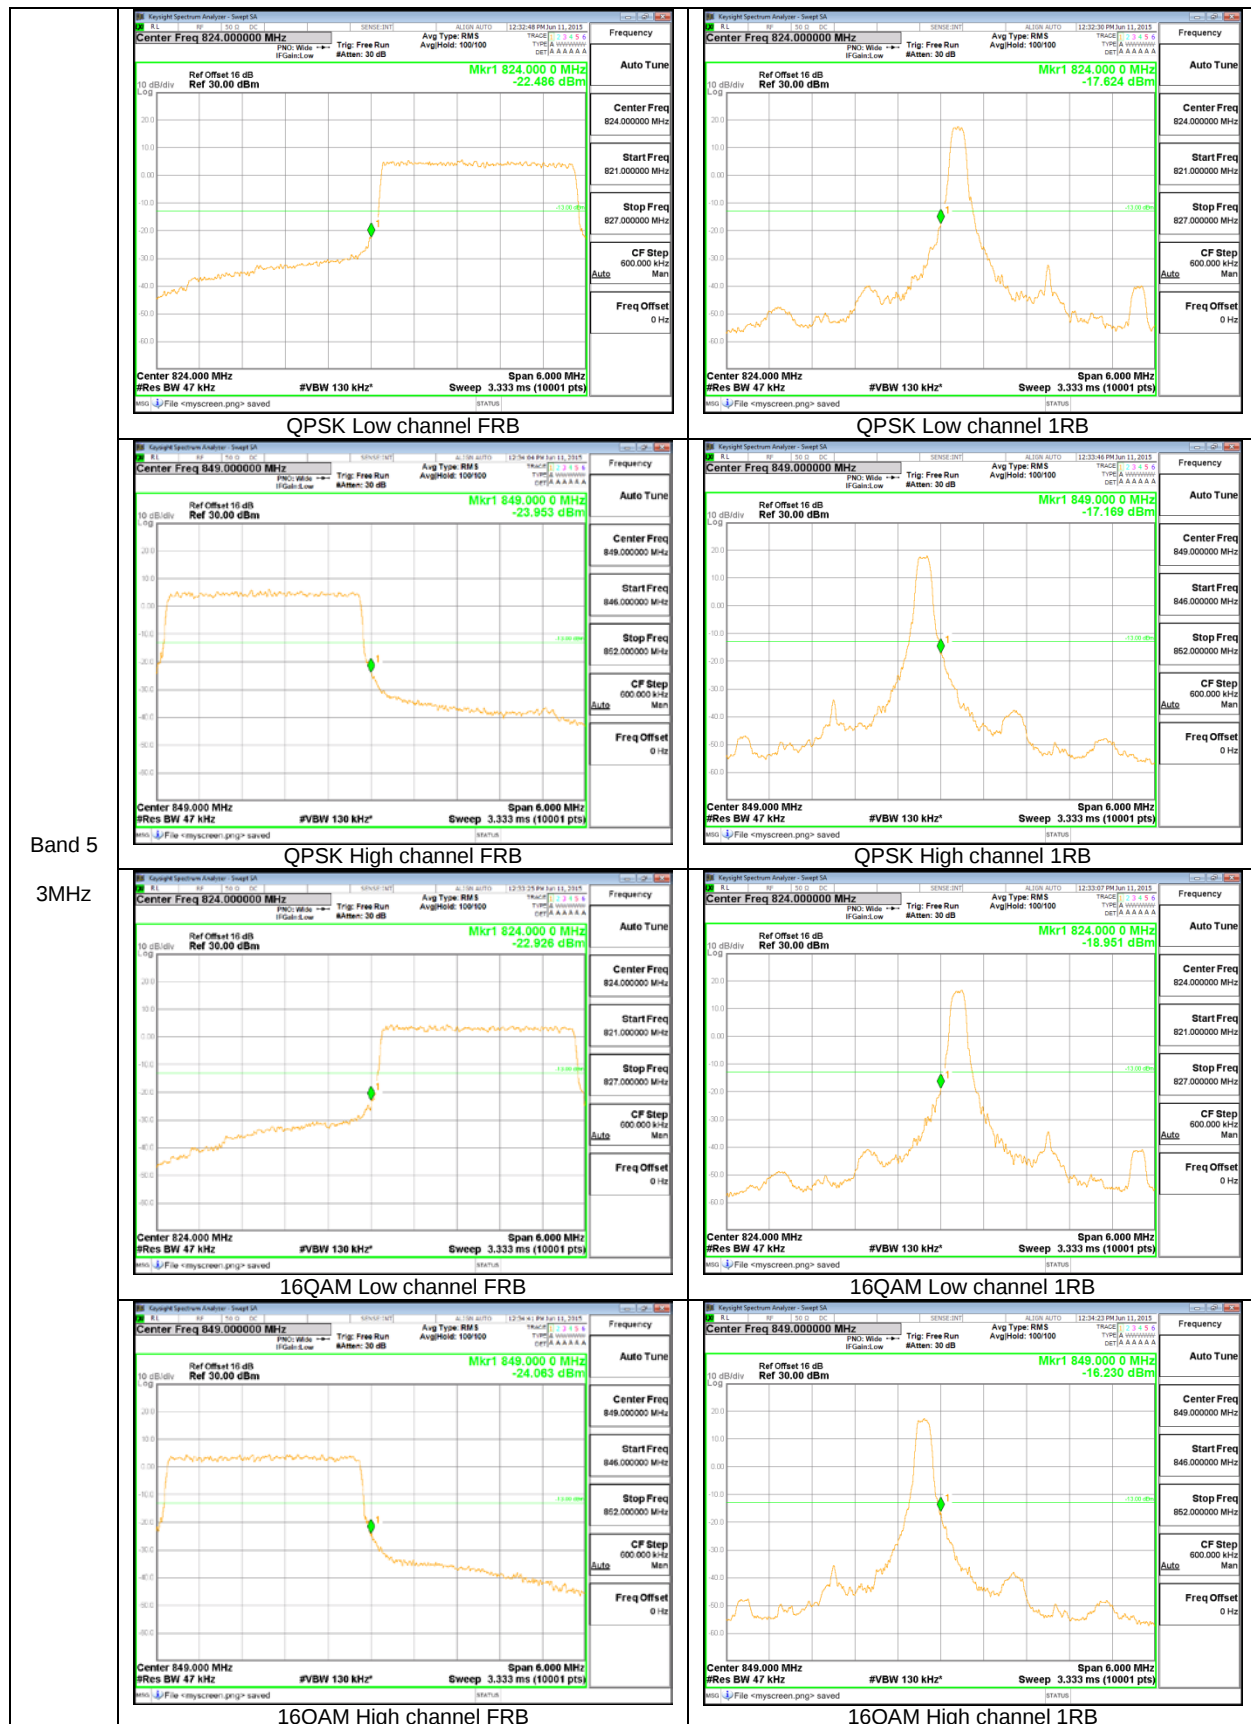

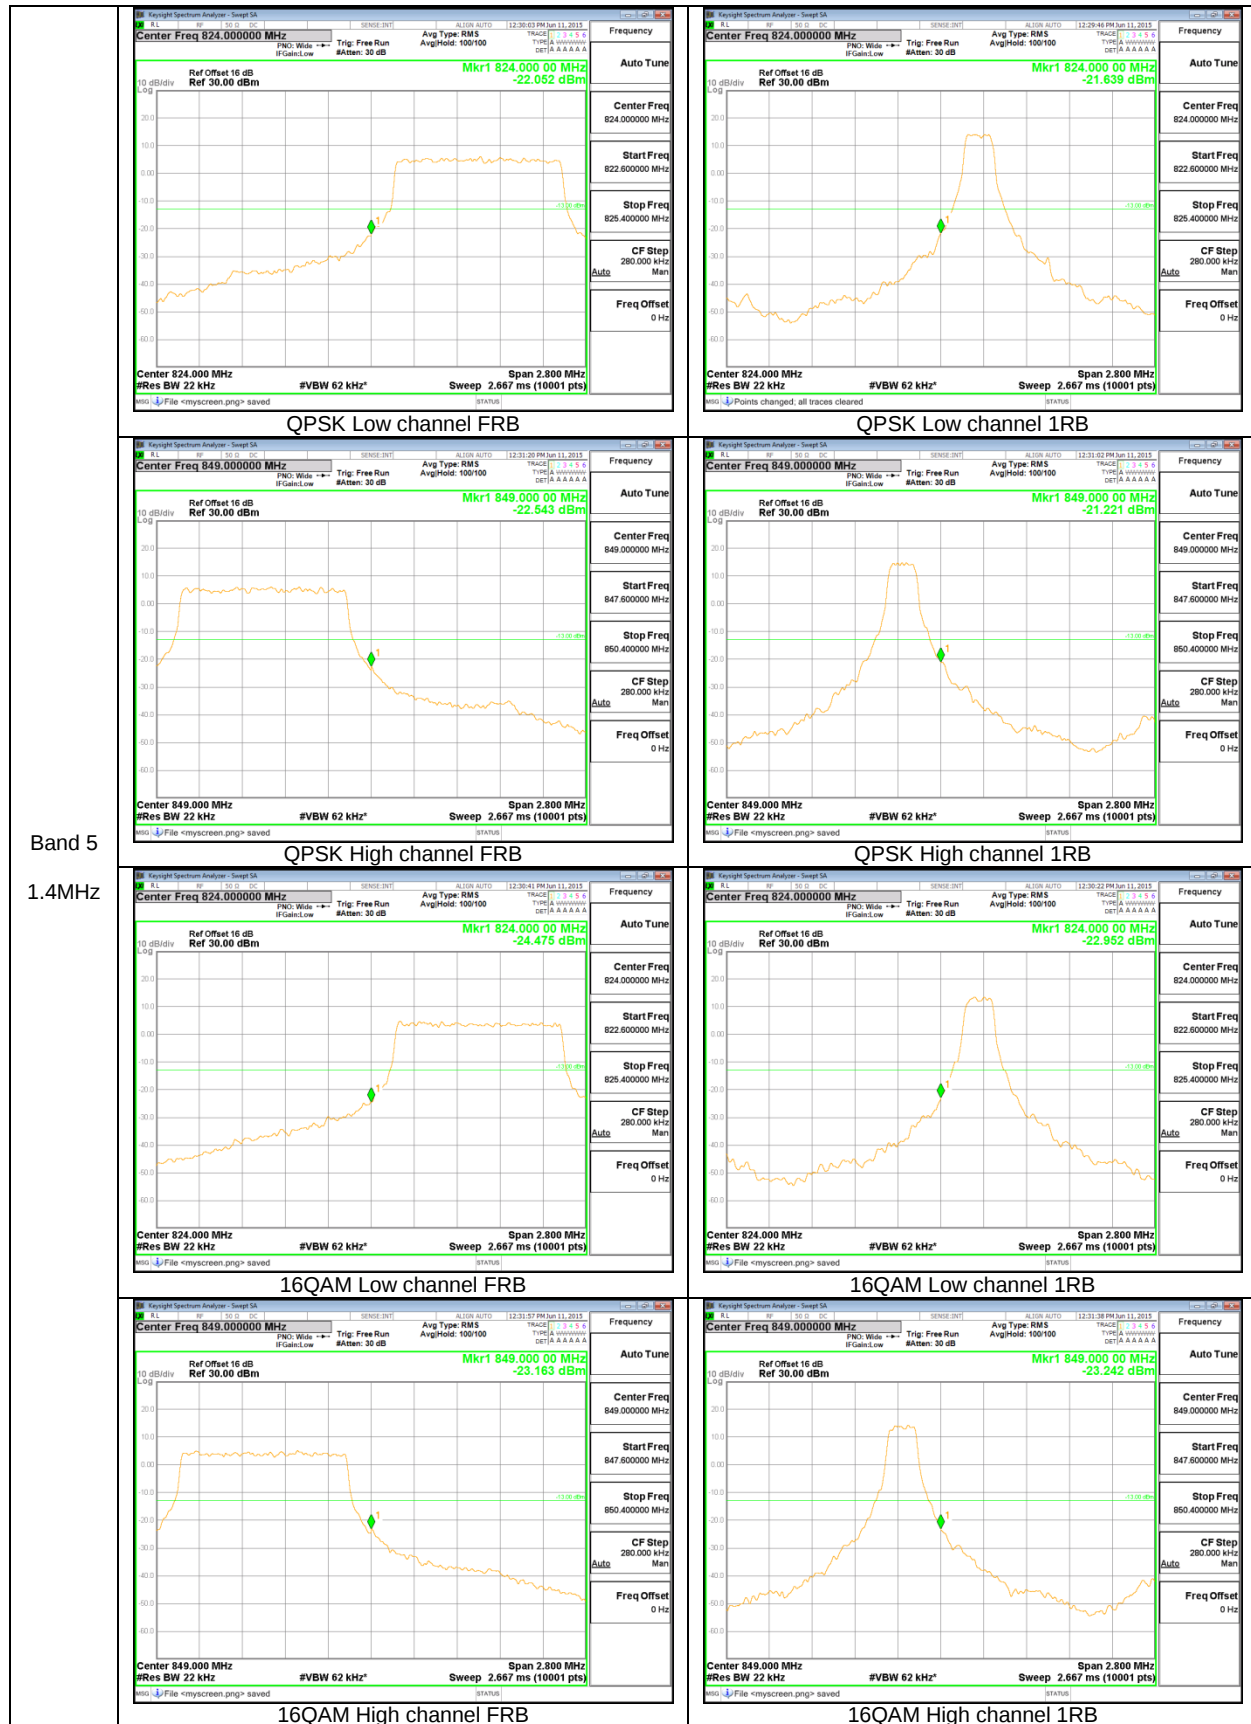

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE 5

Bandwidth	Mode	f [MHz]	Spurious [dBm]	Limit [dBm]	Margin [dB]
10 MHz	QPSK	829.0	-27.61	-13.00	14.61
		836.5	-27.35		14.35
		844.0	-26.88		13.88
	16QAM	829.0	-27.79		14.79
		836.5	-27.15		14.15
		844.0	-27.23		14.23
5 MHz	QPSK	826.5	-27.60		14.30
		836.5	-26.22		13.22
		846.5	-27.18		14.18
	16QAM	826.5	-27.24		14.24
		836.5	-26.94		13.94
		846.5	-27.38		14.38
3 MHz	QPSK	825.5	-26.96		13.96
		836.5	-27.40		14.40
		847.5	-28.03		15.03
	16QAM	825.5	-25.95		12.95
		836.5	-27.16		14.16
		847.5	-27.10		14.10
1.4 MHz	QPSK	824.7	-27.14		14.14
		836.5	-26.23		13.23
		848.3	-26.62		13.62
	16QAM	824.7	-28.50		15.50
		836.5	-26.22		13.22
		848.3	-27.05		14.05

10.3.2. OUT OF BAND EMISSIONS PLOTS


GSM


Please refer to WWAN test report of FCC ID: A3LSMA800YZ


WCDMA


Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

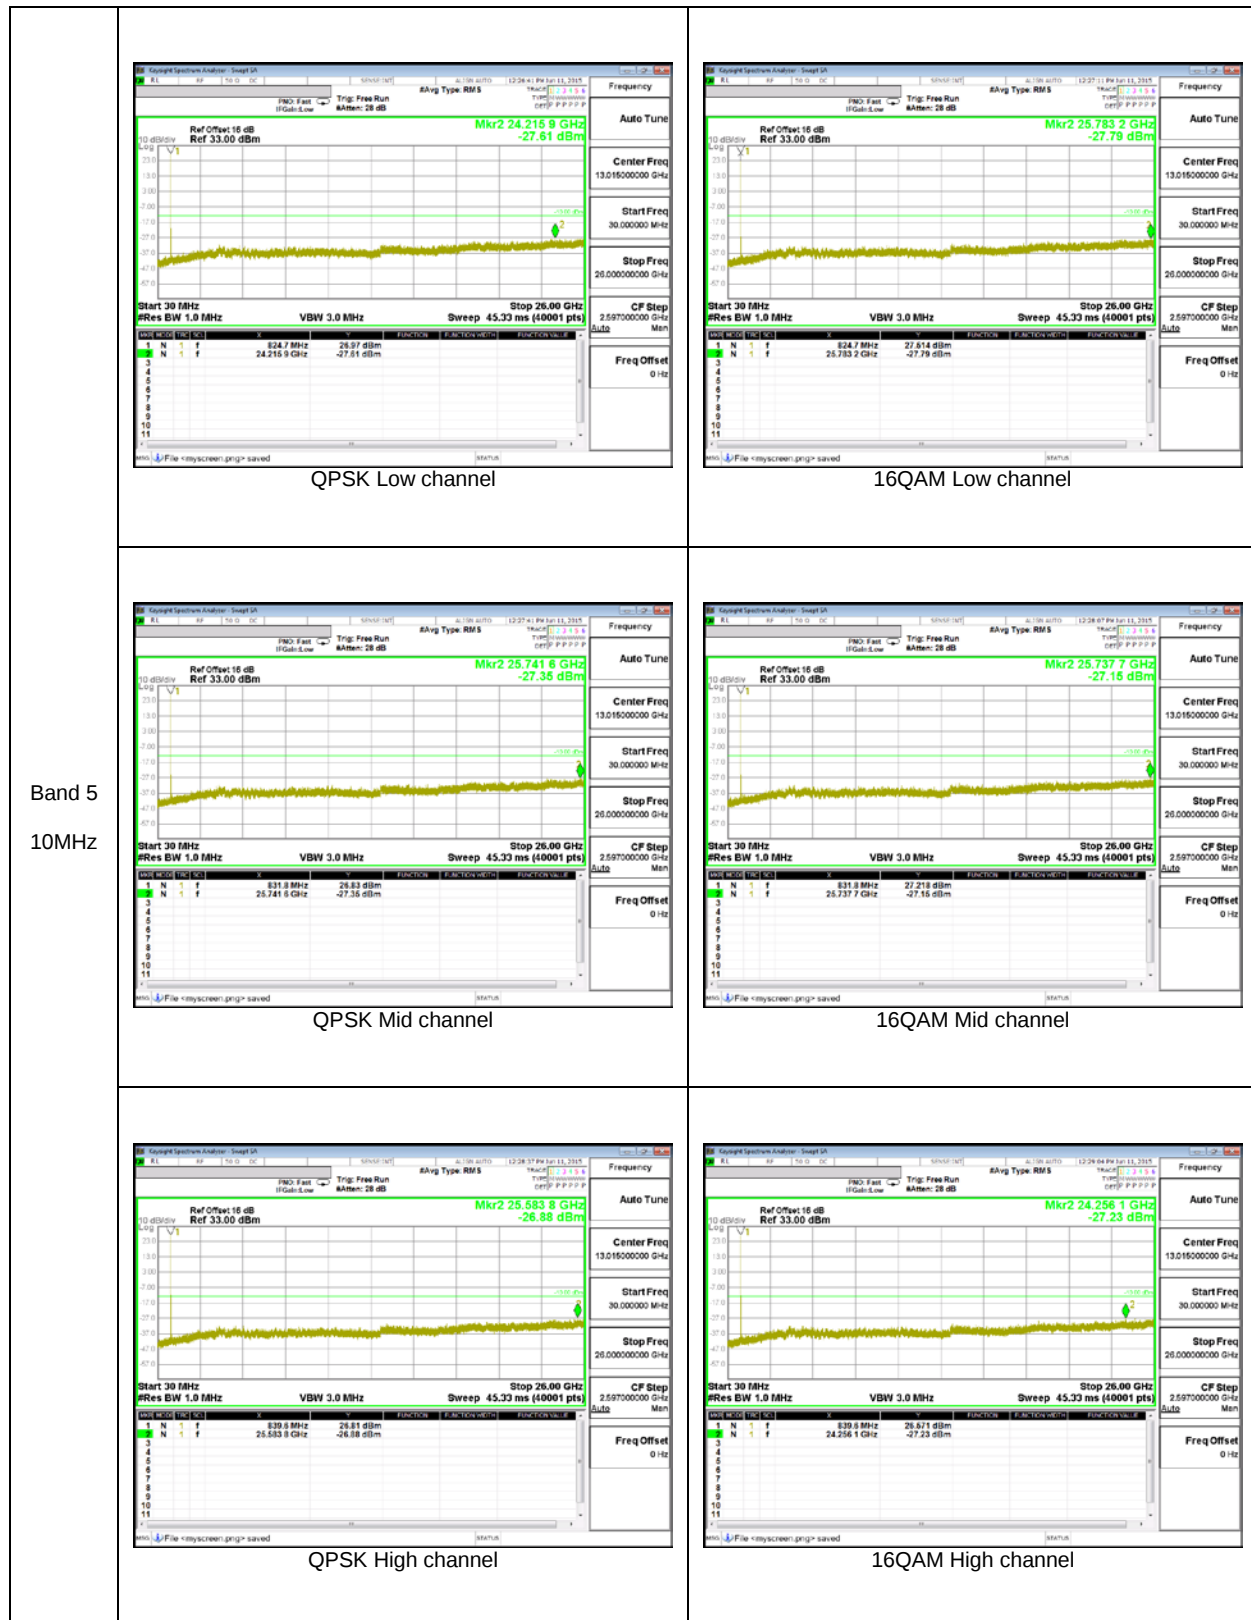

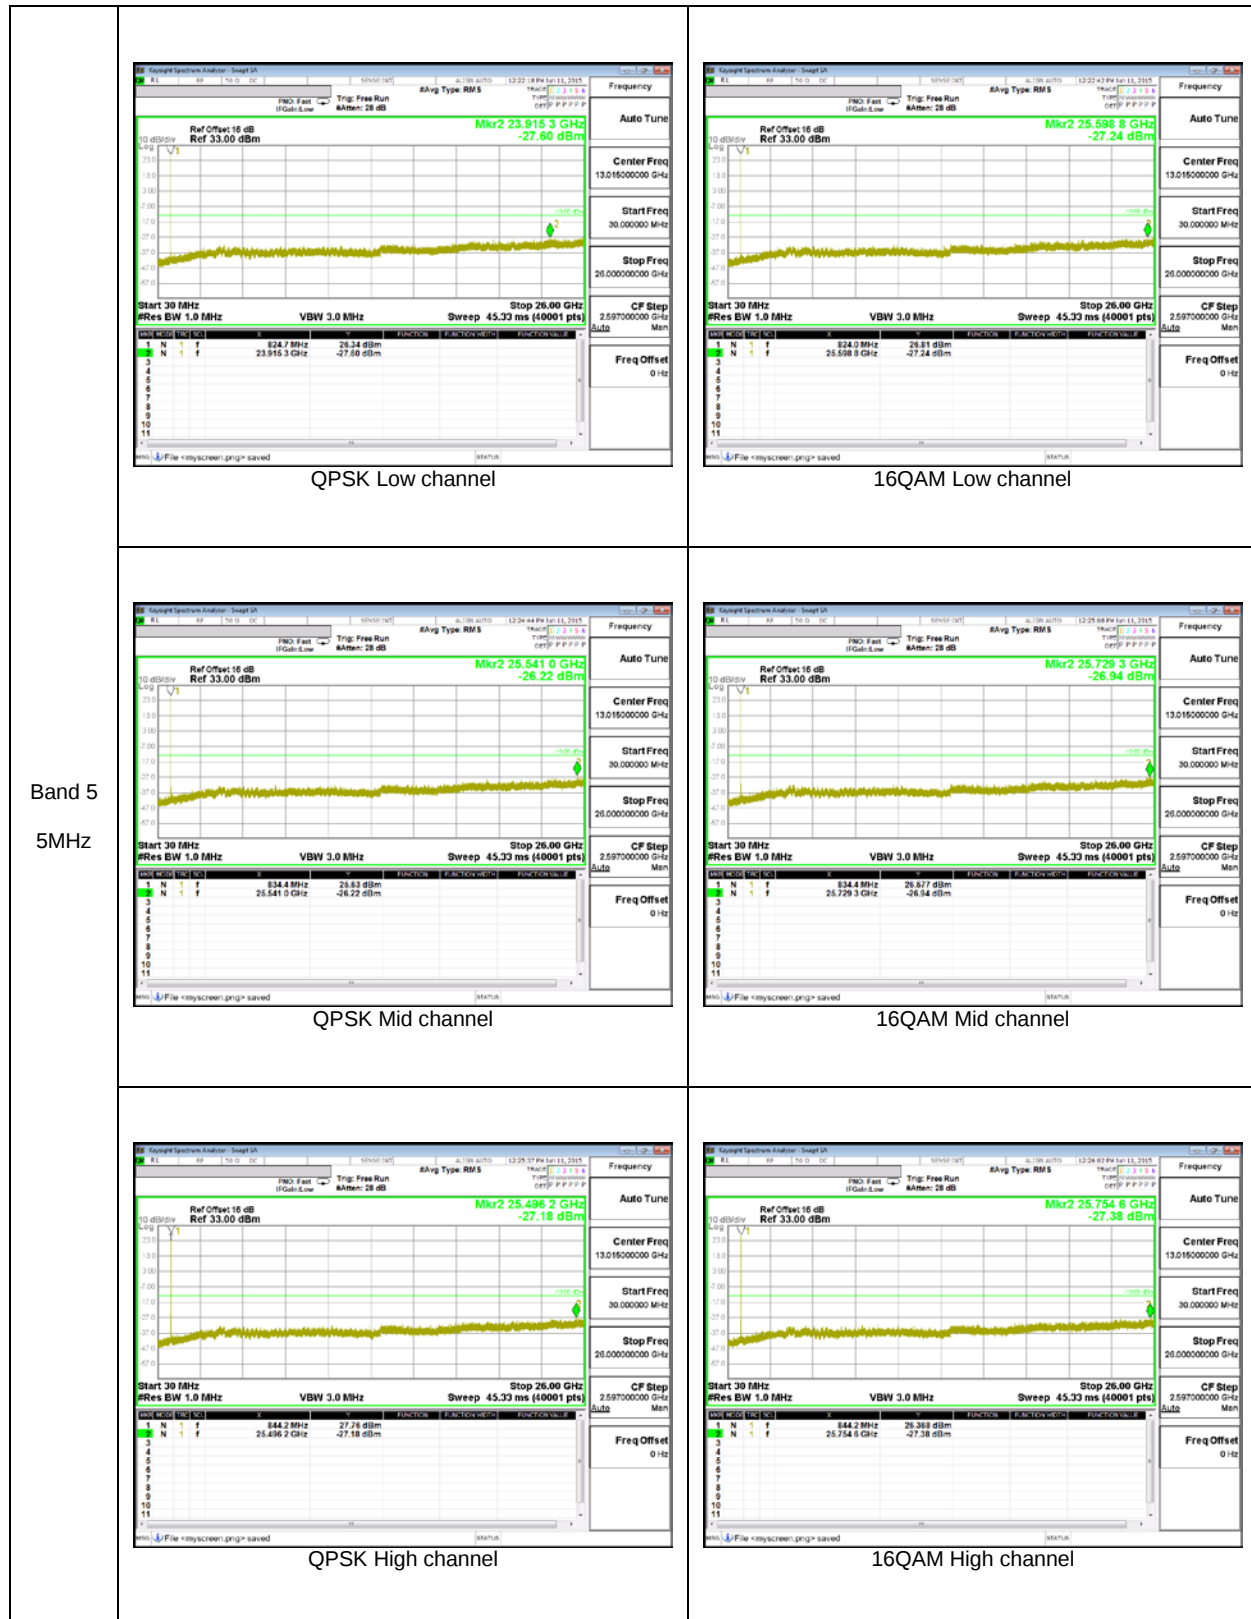

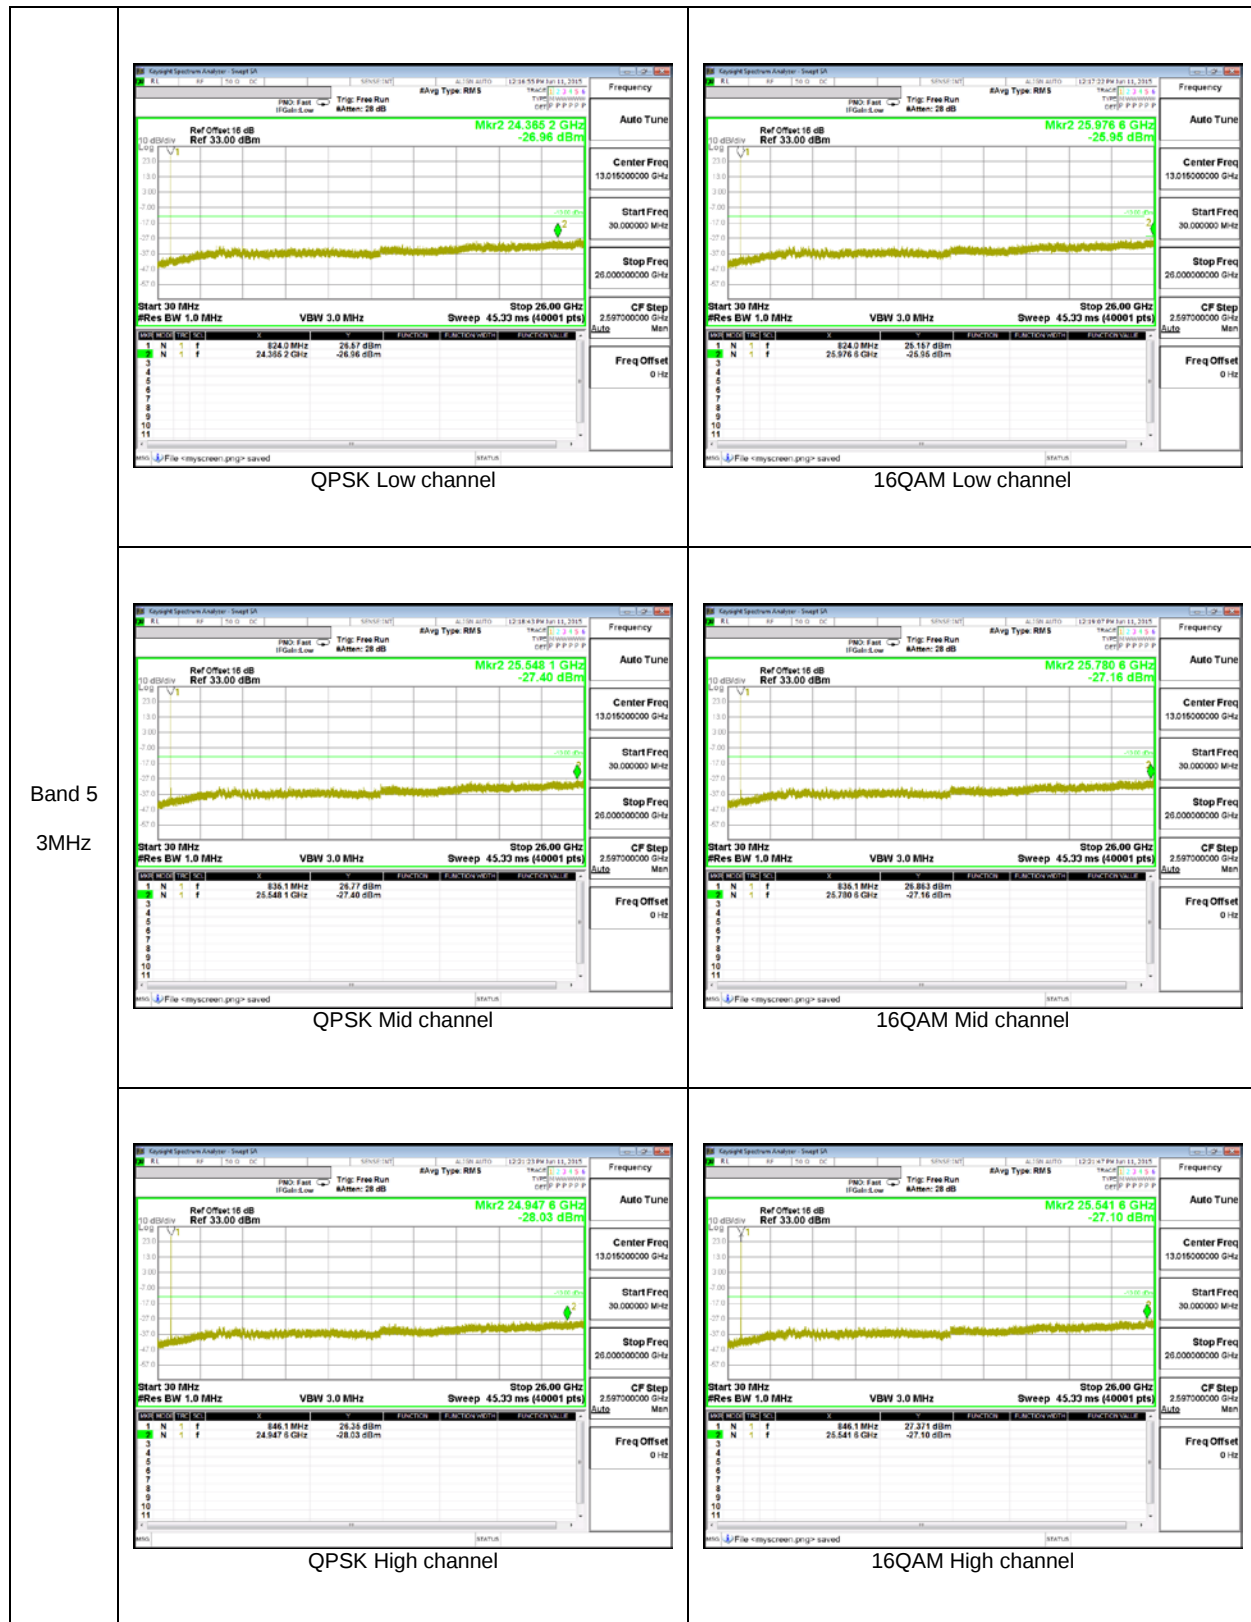

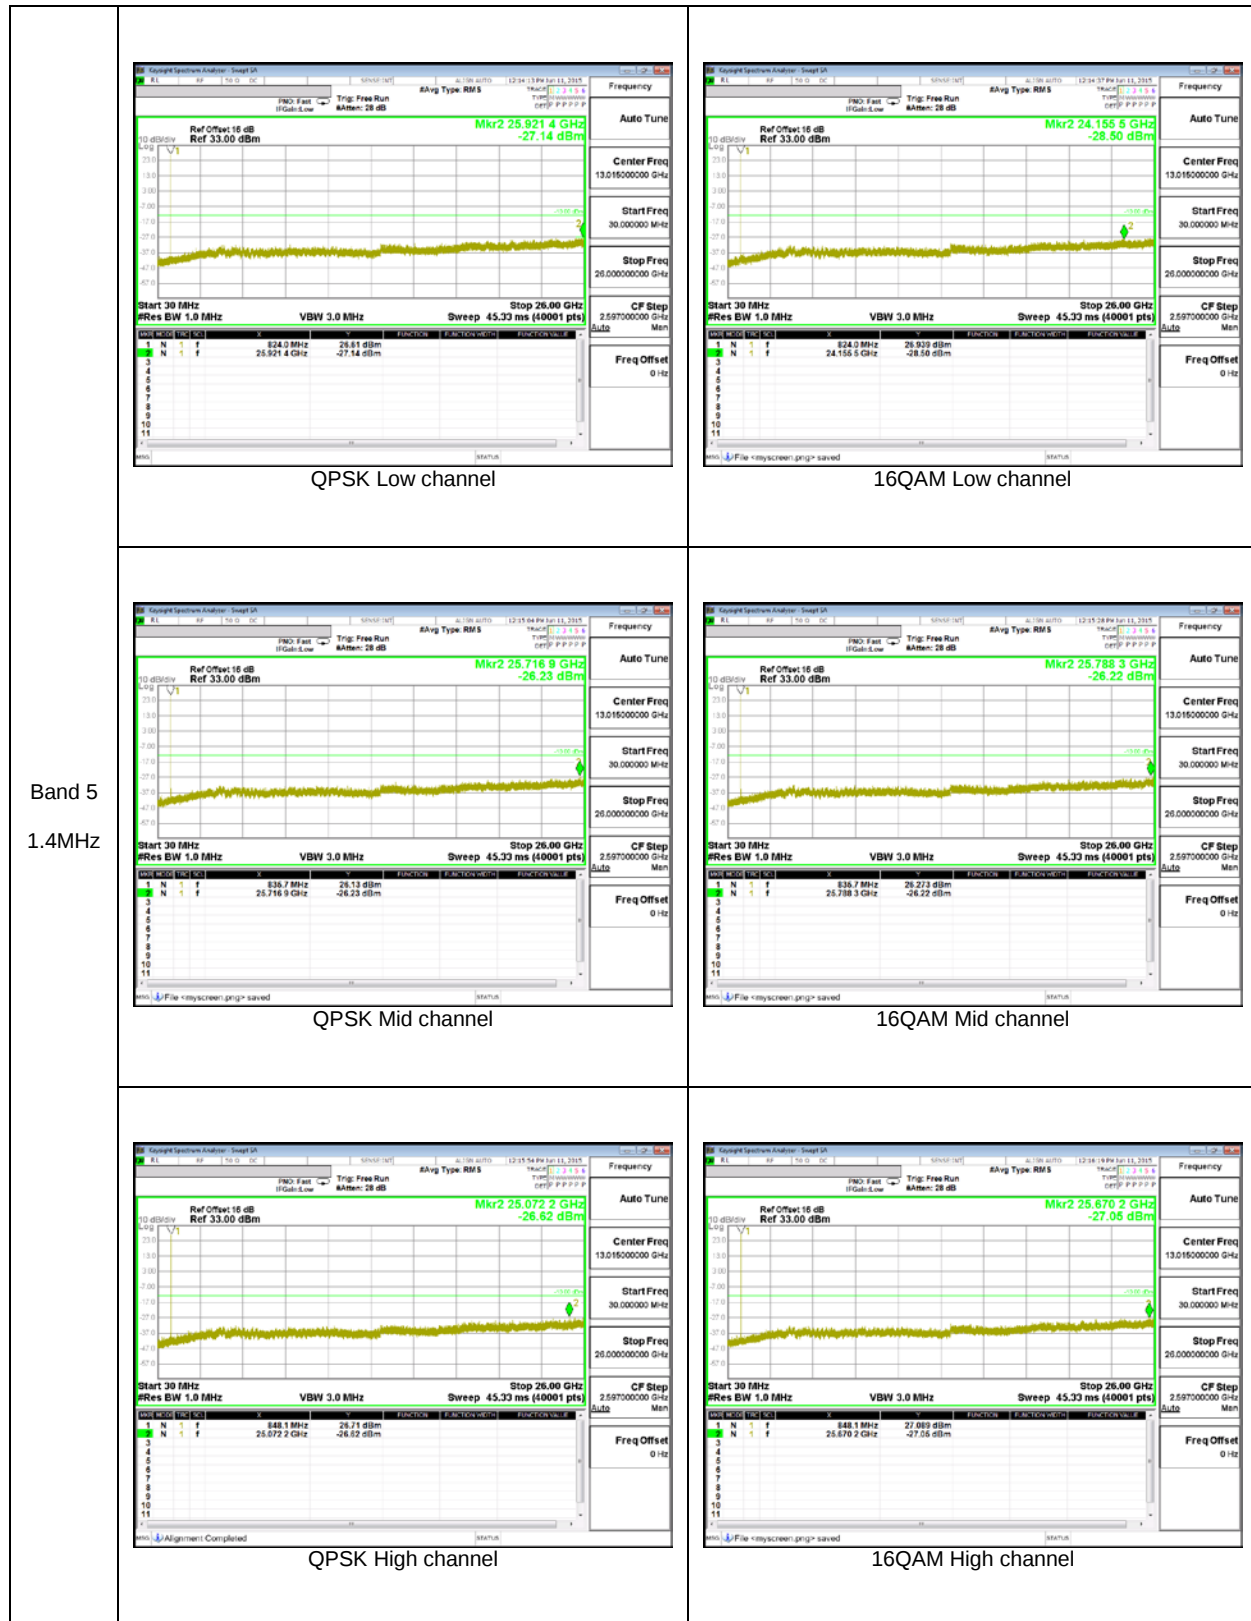

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

WCDMA Band 5, Channel 4183, Frequency 836.6 MHz

GSM 850, Channel 190, Frequency 836.6 MHz

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA Band 2, Channel 9400, Frequency 1880.0 MHz

GSM 1900, Channel 661, Frequency 1880.0 MHz

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5, Channel 20524, Frequency 836.5 MHz

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	836.50001598	-0.007	2.5
3.80	40	836.50000810	0.002	2.5
3.80	30	836.50000747	0.003	2.5
3.80	20	836.50000988	0	2.5
3.80	10	836.50001167	-0.002	2.5
3.80	0	836.50000930	0.001	2.5
3.80	-10	836.50000998	0.000	2.5
3.80	-20	836.50001091	-0.001	2.5
3.80	-30	836.50001332	-0.004	2.5

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	20	836.50000988	0	2.5
4.20	20	836.50000808	0.002	2.5
3.40	20	836.50000648	0.004	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; MXA setting reference to 971168 D01 v02r02

For peak power measurement with a MXA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a MXA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (i.e., RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 5	10	QPSK	50/0	1860.0	8.69	7.39
			50/0	1880.0	7.72	5.91
			50/0	1900.0	7.10	5.13
		16QAM	50/0	1860.0	7.84	6.08
			50/0	1880.0	6.83	4.82
			50/0	1900.0	6.06	4.04
	5	QPSK	25/0	1852.5	9.47	8.84
			25/0	1880.0	7.79	6.00
			25/0	1907.5	6.19	4.16
		16QAM	25/0	1852.5	8.80	7.58
			25/0	1880.0	6.52	4.48
			25/0	1907.5	5.79	3.79
	3	QPSK	15/0	1815.5	10.42	11.01
			15/0	1880.0	8.76	7.51
			15/0	1908.5	7.11	5.15
		16QAM	15/0	1815.5	9.88	9.72
			15/0	1880.0	7.99	6.29
			15/0	1908.5	7.14	5.17
	1.4	QPSK	6/0	1850.7	10.85	12.15
			6/0	1880.0	8.79	7.58
			6/0	1909.3	6.62	4.60
		16QAM	6/0	1850.7	9.85	9.65
			6/0	1880.0	8.02	6.33
			6/0	1909.3	6.22	4.18

11.1.2. ERP/EIRP DATA

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

LTE Band 5 10MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
	Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: TX, LTE BAND 5, 10MHz BW, QPSK							
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)
	Low Ch							
	829.00	11.27	V	1.1	-1.5	8.69	38.5	-29.8
	829.00	8.96	H	1.1	-1.5	6.38	38.5	-32.1
	Mid Ch							
	836.50	10.21	V	1.1	-1.4	7.72	38.5	-30.7
	836.50	8.25	H	1.1	-1.4	5.76	38.5	-32.7
	High Ch							
	844.00	9.49	V	1.1	-1.3	7.10	38.5	-31.4
	844.00	7.71	H	1.1	-1.3	5.29	38.5	-33.2
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
LTE Band 5 10MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
	Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: LTE5 10MHz FUND 16QAM							
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)
	Low Ch							
	829.00	10.42	V	1.1	-1.5	7.84	38.5	-30.6
	829.00	7.87	H	1.1	-1.5	5.29	38.5	-33.2
	Mid Ch							
	836.50	9.34	V	1.1	-1.4	6.83	38.5	-31.6
	836.50	7.68	H	1.1	-1.4	5.17	38.5	-33.3
	High Ch							
	844.00	8.48	V	1.1	-1.3	6.06	38.5	-32.4
	844.00	7.10	H	1.1	-1.3	4.68	38.5	-33.8
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

LTE Band 5 5MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2 Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: LTE5 5MHz FUND QPSK Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse. <table><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Margin (dB)</th><th>Notes</th></tr></thead><tbody><tr><td colspan="9">Low Ch</td></tr><tr><td>826.50</td><td>12.07</td><td>V</td><td>1.1</td><td>-1.5</td><td>9.47</td><td>38.5</td><td>-29.0</td><td></td></tr><tr><td>826.50</td><td>7.87</td><td>H</td><td>1.1</td><td>-1.5</td><td>5.27</td><td>38.5</td><td>-33.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>10.28</td><td>V</td><td>1.1</td><td>-1.4</td><td>7.79</td><td>38.5</td><td>-30.7</td><td></td></tr><tr><td>836.50</td><td>8.48</td><td>H</td><td>1.1</td><td>-1.4</td><td>5.99</td><td>38.5</td><td>-32.5</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>846.50</td><td>8.94</td><td>V</td><td>1.6</td><td>-1.3</td><td>6.06</td><td>38.5</td><td>-32.4</td><td></td></tr><tr><td>846.50</td><td>9.07</td><td>H</td><td>1.6</td><td>-1.3</td><td>6.19</td><td>38.5</td><td>-32.3</td><td></td></tr></tbody></table> Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									826.50	12.07	V	1.1	-1.5	9.47	38.5	-29.0		826.50	7.87	H	1.1	-1.5	5.27	38.5	-33.2		Mid Ch									836.50	10.28	V	1.1	-1.4	7.79	38.5	-30.7		836.50	8.48	H	1.1	-1.4	5.99	38.5	-32.5		High Ch									846.50	8.94	V	1.6	-1.3	6.06	38.5	-32.4		846.50	9.07	H	1.6	-1.3	6.19	38.5	-32.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																			
Low Ch																																																																																											
826.50	12.07	V	1.1	-1.5	9.47	38.5	-29.0																																																																																				
826.50	7.87	H	1.1	-1.5	5.27	38.5	-33.2																																																																																				
Mid Ch																																																																																											
836.50	10.28	V	1.1	-1.4	7.79	38.5	-30.7																																																																																				
836.50	8.48	H	1.1	-1.4	5.99	38.5	-32.5																																																																																				
High Ch																																																																																											
846.50	8.94	V	1.6	-1.3	6.06	38.5	-32.4																																																																																				
846.50	9.07	H	1.6	-1.3	6.19	38.5	-32.3																																																																																				
LTE Band 5 5MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2 Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: LTE5 5MHz FUND 16QAM Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse. <table><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Margin (dB)</th><th>Notes</th></tr></thead><tbody><tr><td colspan="9">Low Ch</td></tr><tr><td>826.50</td><td>11.40</td><td>V</td><td>1.1</td><td>-1.5</td><td>8.80</td><td>38.5</td><td>-29.7</td><td></td></tr><tr><td>826.50</td><td>6.35</td><td>H</td><td>1.1</td><td>-1.5</td><td>3.75</td><td>38.5</td><td>-34.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>9.01</td><td>V</td><td>1.1</td><td>-1.4</td><td>6.52</td><td>38.5</td><td>-31.9</td><td></td></tr><tr><td>836.50</td><td>7.09</td><td>H</td><td>1.1</td><td>-1.4</td><td>4.60</td><td>38.5</td><td>-33.9</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>846.50</td><td>7.81</td><td>V</td><td>1.1</td><td>-1.3</td><td>5.43</td><td>38.5</td><td>-33.0</td><td></td></tr><tr><td>846.50</td><td>8.17</td><td>H</td><td>1.1</td><td>-1.3</td><td>5.79</td><td>38.5</td><td>-32.7</td><td></td></tr></tbody></table> Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									826.50	11.40	V	1.1	-1.5	8.80	38.5	-29.7		826.50	6.35	H	1.1	-1.5	3.75	38.5	-34.7		Mid Ch									836.50	9.01	V	1.1	-1.4	6.52	38.5	-31.9		836.50	7.09	H	1.1	-1.4	4.60	38.5	-33.9		High Ch									846.50	7.81	V	1.1	-1.3	5.43	38.5	-33.0		846.50	8.17	H	1.1	-1.3	5.79	38.5	-32.7	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																			
Low Ch																																																																																											
826.50	11.40	V	1.1	-1.5	8.80	38.5	-29.7																																																																																				
826.50	6.35	H	1.1	-1.5	3.75	38.5	-34.7																																																																																				
Mid Ch																																																																																											
836.50	9.01	V	1.1	-1.4	6.52	38.5	-31.9																																																																																				
836.50	7.09	H	1.1	-1.4	4.60	38.5	-33.9																																																																																				
High Ch																																																																																											
846.50	7.81	V	1.1	-1.3	5.43	38.5	-33.0																																																																																				
846.50	8.17	H	1.1	-1.3	5.79	38.5	-32.7																																																																																				

LTE

Band 5

3MHz

QPSK

High Frequency Substitution Measurement

UL Korea, Ltd. Suwon Laboratory Chamber 2

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Test Equipment:

Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT)

Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
825.50	11.87	V	1.1	-1.5	9.27	38.5	-29.2	
825.50	13.02	H	1.1	-1.5	10.42	38.5	-28.0	
Mid Ch								
836.50	9.95	V	1.1	-1.4	7.46	38.5	-31.0	
836.50	11.25	H	1.1	-1.4	8.76	38.5	-29.7	
High Ch								
847.50	8.47	V	1.6	-1.3	5.59	38.5	-32.9	
847.50	9.99	H	1.6	-1.3	7.11	38.5	-31.3	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

LTE

Band 5

3MHz

16QAM

High Frequency Substitution Measurement

UL Korea, Ltd. Suwon Laboratory Chamber 2

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Test Equipment:

Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT)

Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
825.50	11.21	V	1.1	-1.5	8.61	38.5	-29.8	
825.50	12.48	H	1.1	-1.5	9.88	38.5	-28.6	
Mid Ch								
836.50	9.01	V	1.1	-1.4	6.52	38.5	-31.9	
836.50	10.48	H	1.1	-1.4	7.99	38.5	-30.5	
High Ch								
847.50	7.61	V	1.1	-1.3	5.23	38.5	-33.2	
847.50	9.52	H	1.1	-1.3	7.14	38.5	-31.3	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

LTE Band 5 1.4MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: LTE5 1.4MHz FUND QPSK								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	13.45	V	1.1	-1.5	10.85	38.5	-27.6	
	824.70	7.28	H	1.1	-1.5	4.68	38.5	-33.8	
	Mid Ch								
	836.50	11.29	V	1.1	-1.4	8.79	38.5	-29.7	
	836.50	6.13	H	1.1	-1.4	3.64	38.5	-34.8	
	High Ch								
	844.30	9.50	V	1.6	-1.3	6.62	38.5	-31.8	
	844.30	6.85	H	1.6	-1.3	3.97	38.5	-34.5	
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									
LTE Band 5 1.4MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: LTE5 1.4MHz FUND 16QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	12.45	V	1.1	-1.5	9.85	38.5	-28.6	
	824.70	6.51	H	1.1	-1.5	3.91	38.5	-34.5	
	Mid Ch								
	836.50	10.51	V	1.1	-1.4	8.02	38.5	-30.4	
	836.50	5.48	H	1.1	-1.4	2.99	38.5	-35.5	
	High Ch								
	844.30	8.60	V	1.1	-1.3	6.22	38.5	-32.2	
	844.30	5.80	H	1.1	-1.3	3.42	38.5	-35.0	
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

Part 22.917(a) & Part 24.238(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

GSM

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

WCDMA

Please refer to WWAN test report of FCC ID: A3LSMA800YZ

LTE Band 5

LTE Band 5 10MHz QPSK	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone, Z Position Mode: TX, LTE BAND 5, 10MHz BW,QPSK									
	Chamber Pre-amplifier Filter Limit Chamber 2 AFS42 Filter 1 Part 22									
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Channel (829MHz)									
	1.6580	-22.6	V	3.0	39.1	1.0	-60.8	-13.0	-47.8	
	2.4870	-30.5	V	3.0	39.5	1.0	-69.0	-13.0	-56.0	
	3.3160	-35.5	V	3.0	40.1	1.0	-74.6	-13.0	-61.6	
	1.6580	-16.8	H	3.0	39.1	1.0	-55.0	-13.0	-42.0	
	2.4870	-29.9	H	3.0	39.5	1.0	-68.4	-13.0	-55.4	
	3.3160	-35.8	H	3.0	40.1	1.0	-75.0	-13.0	-62.0	
	Mid Channel (836.5MHz)									
	1.6730	-19.0	V	3.0	39.1	1.0	-57.1	-13.0	-44.1	
	2.5090	-33.4	V	3.0	39.5	1.0	-72.0	-13.0	-59.0	
	3.3460	-35.5	V	3.0	40.1	1.0	-74.6	-13.0	-61.6	
	1.6730	-23.1	H	3.0	39.1	1.0	-61.2	-13.0	-48.2	
	2.5090	-34.2	H	3.0	39.5	1.0	-72.7	-13.0	-59.7	
	3.3460	-35.6	H	3.0	40.1	1.0	-74.8	-13.0	-61.8	
	High Channel (844MHz)									
	1.6880	-25.0	V	3.0	39.1	1.0	-63.1	-13.0	-50.1	
	2.5320	-30.7	V	3.0	39.5	1.0	-69.3	-13.0	-56.3	
	3.3760	-35.3	V	3.0	40.2	1.0	-74.5	-13.0	-61.5	
	1.6880	-17.7	H	3.0	39.1	1.0	-55.8	-13.0	-42.8	
	2.5320	-30.2	H	3.0	39.5	1.0	-68.8	-13.0	-55.8	
	3.3760	-35.4	H	3.0	40.2	1.0	-74.6	-13.0	-61.6	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									
LTE Band 5 10MHz 16QAM	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 15K21022 Date: 06-20-15 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone, Z Position Mode: TX, LTE BAND 5, 10MHz BW,16QAM									
	Chamber Pre-amplifier Filter Limit Chamber 2 AFS42 Filter 1 Part 22									
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Channel (829MHz)									
	1.6580	-23.6	V	3.0	39.1	1.0	-61.7	-13.0	-48.7	
	2.4870	-31.5	V	3.0	39.5	1.0	-70.0	-13.0	-57.0	
	3.3160	-35.5	V	3.0	40.1	1.0	-74.6	-13.0	-61.6	
	1.6580	-17.9	H	3.0	39.1	1.0	-56.0	-13.0	-43.0	
	2.4870	-30.8	H	3.0	39.5	1.0	-69.3	-13.0	-56.3	
	3.3160	-35.7	H	3.0	40.1	1.0	-74.8	-13.0	-61.8	
	Mid Channel (836.5MHz)									
	1.6730	-20.0	V	3.0	39.1	1.0	-58.1	-13.0	-45.1	
	2.5090	-34.7	V	3.0	39.5	1.0	-73.2	-13.0	-60.2	
	3.3460	-35.5	V	3.0	40.1	1.0	-74.6	-13.0	-61.6	
	1.6730	-24.1	H	3.0	39.1	1.0	-62.2	-13.0	-49.2	
	2.5090	-35.1	H	3.0	39.5	1.0	-73.6	-13.0	-60.6	
	3.3460	-35.5	H	3.0	40.1	1.0	-74.7	-13.0	-61.7	
	High Channel (844MHz)									
	1.6880	-26.4	V	3.0	39.1	1.0	-64.5	-13.0	-51.5	
	2.5320	-31.7	V	3.0	39.5	1.0	-70.3	-13.0	-57.3	
	3.3760	-35.3	V	3.0	40.2	1.0	-74.5	-13.0	-61.5	
	1.6880	-18.6	H	3.0	39.1	1.0	-56.7	-13.0	-43.7	
	2.5320	-31.2	H	3.0	39.5	1.0	-69.8	-13.0	-56.8	
	3.3760	-35.3	H	3.0	40.2	1.0	-74.5	-13.0	-61.5	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement										
	Company: Samsung										
	Project #: 15K21022										
	Date: 06-20-15										
	Test Engineer: Steven.Kim										
	Configuration: EUT / AC Adapter / Earphone, Z Position										
	Mode: TX, LTE BAND 5, 5MHz BW,QPSK										
	Chamber		Pre-amplifier		Filter		Limit				
	Chamber 2		AFS42		Filter 1		Part 22				
LTE	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band 5 5MHz QPSK	Low Channel (826.5MHz)										
	1.6530	-10.7	V	3.0	39.1	1.0	-48.8	-13.0	-35.8		
	2.4790	-28.1	V	3.0	39.5	1.0	-66.6	-13.0	-53.6		
	3.3060	-35.5	V	3.0	40.1	1.0	-74.6	-13.0	-61.6		
	1.6530	-15.6	H	3.0	39.1	1.0	-53.8	-13.0	-40.8		
	2.4790	-29.8	H	3.0	39.5	1.0	-68.3	-13.0	-55.3		
	3.3060	-35.6	H	3.0	40.1	1.0	-74.7	-13.0	-61.7		
	Mid Channel (836.5MHz)										
	1.6730	-18.3	V	3.0	39.1	1.0	-56.4	-13.0	-43.4		
	2.5090	-33.8	V	3.0	39.5	1.0	-72.4	-13.0	-59.4		
	3.3460	-35.6	V	3.0	40.1	1.0	-74.8	-13.0	-61.8		
	1.6730	-21.4	H	3.0	39.1	1.0	-59.5	-13.0	-46.5		
	2.5090	-34.7	H	3.0	39.5	1.0	-73.2	-13.0	-60.2		
	3.3460	-35.5	H	3.0	40.1	1.0	-74.6	-13.0	-61.6		
	High Channel (846.5MHz)										
	1.6930	-18.9	V	3.0	39.1	1.0	-57.1	-13.0	-44.1		
	2.5390	-26.1	V	3.0	39.6	1.0	-64.6	-13.0	-51.6		
	3.3860	-35.5	V	3.0	40.2	1.0	-74.7	-13.0	-61.7		
	1.6930	-21.0	H	3.0	39.1	1.0	-59.1	-13.0	-46.1		
	2.5390	-30.2	H	3.0	39.6	1.0	-68.8	-13.0	-55.8		
	3.3860	-35.5	H	3.0	40.2	1.0	-74.7	-13.0	-61.7		
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement										
	Company: Samsung										
	Project #: 15K21022										
	Date: 06-20-15										
	Test Engineer: Steven.Kim										
	Configuration: EUT / AC Adapter / Earphone, Z Position										
	Mode: TX, LTE BAND 5, 5MHz BW,16QAM										
	Chamber		Pre-amplifier		Filter		Limit				
	Chamber 2		AFS42		Filter 1		Part 22				
LTE	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Band 5 5MHz 16QAM	Low Channel (826.5MHz)										
	1.6530	-11.2	V	3.0	39.1	1.0	-49.3	-13.0	-36.3		
	2.4790	-28.4	V	3.0	39.5	1.0	-66.9	-13.0	-53.9		
	3.3060	-35.6	V	3.0	40.1	1.0	-74.7	-13.0	-61.7		
	1.6530	-16.6	H	3.0	39.1	1.0	-54.7	-13.0	-41.7		
	2.4790	-31.2	H	3.0	39.5	1.0	-69.7	-13.0	-56.7		
	3.3060	-35.6	H	3.0	40.1	1.0	-74.7	-13.0	-61.7		
	Mid Channel (836.5MHz)										
	1.6730	-19.3	V	3.0	39.1	1.0	-57.4	-13.0	-44.4		
	2.5090	-34.4	V	3.0	39.5	1.0	-73.0	-13.0	-60.0		
	3.3460	-35.3	V	3.0	40.1	1.0	-74.4	-13.0	-61.4		
	1.6730	-22.3	H	3.0	39.1	1.0	-60.4	-13.0	-47.4		
	2.5090	-35.8	H	3.0	39.5	1.0	-74.4	-13.0	-61.4		
	3.3460	-35.8	H	3.0	40.1	1.0	-75.0	-13.0	-62.0		
	High Channel (846.5MHz)										
	1.6930	-20.7	V	3.0	39.1	1.0	-58.8	-13.0	-45.8		
	2.5390	-27.0	V	3.0	39.6	1.0	-65.6	-13.0	-52.6		
	3.3860	-35.1	V	3.0	40.2	1.0	-74.3	-13.0	-61.3		
	1.6930	-21.5	H	3.0	39.1	1.0	-59.6	-13.0	-46.6		
	2.5390	-30.9	H	3.0	39.6	1.0	-69.5	-13.0	-56.5		
	3.3860	-35.4	H	3.0	40.2	1.0	-74.6	-13.0	-61.6		
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

LTE Band 5 3MHz QPSK	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung									
	Project #: 15K21022									
	Date: 06-20-15									
	Test Engineer: Steven.Kim									
	Configuration: EUT / AC Adapter / Earphone, Z Position									
	Mode: TX, LTE BAND 5, 3MHz BW,QPSK									
	Chamber		Pre-amplifier		Filter		Limit			
	Chamber 2		AFS42		Filter 1		Part 22			
	f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
	GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
	Low Channel (825.5MHz)									
	1.6510	-11.8	V	3.0	39.1	1.0	-49.9	-13.0	-36.9	
	2.4675	-27.9	V	3.0	39.5	1.0	-66.4	-13.0	-53.4	
	3.3020	-35.6	V	3.0	40.1	1.0	-74.7	-13.0	-61.7	
	1.6510	-17.8	H	3.0	39.1	1.0	-55.9	-13.0	-42.9	
	2.4675	-30.5	H	3.0	39.5	1.0	-69.0	-13.0	-56.0	
	3.3020	-35.6	H	3.0	40.1	1.0	-74.7	-13.0	-61.7	
	Mid Channel (836.5MHz)									
	1.6730	-18.0	V	3.0	39.1	1.0	-56.1	-13.0	-43.1	
	2.5090	-33.3	V	3.0	39.5	1.0	-71.8	-13.0	-58.8	
	3.3460	-35.4	V	3.0	40.1	1.0	-74.5	-13.0	-61.5	
	1.6730	-21.3	H	3.0	39.1	1.0	-59.4	-13.0	-46.4	
	2.5090	-34.1	H	3.0	39.5	1.0	-72.6	-13.0	-59.6	
	3.3460	-35.6	H	3.0	40.1	1.0	-74.8	-13.0	-61.8	
	High Channel (847.5MHz)									
1.6950	-23.2	V	3.0	39.1	1.0	-61.3	-13.0	-48.3		
2.5425	-26.7	V	3.0	39.6	1.0	-65.2	-13.0	-52.2		
3.3900	-35.2	V	3.0	40.2	1.0	-74.4	-13.0	-61.4		
1.6950	-27.4	H	3.0	39.1	1.0	-65.5	-13.0	-52.5		
2.5425	-30.7	H	3.0	39.6	1.0	-69.2	-13.0	-56.2		
3.3900	-35.3	H	3.0	40.2	1.0	-74.5	-13.0	-61.5		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

LTE Band 5 3MHz 16QAM	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung									
	Project #: 15K21022									
	Date: 06-20-15									
	Test Engineer: Steven.Kim									
	Configuration: EUT / AC Adapter / Earphone, Z Position									
	Mode: TX, LTE BAND 5, 3MHz BW,16QAM									
	Chamber		Pre-amplifier		Filter		Limit			
	Chamber 2		AFS42		Filter 1		Part 22			
	f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
	GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
	Low Channel (825.5MHz)									
	1.6510	-12.5	V	3.0	39.1	1.0	-50.6	-13.0	-37.6	
	2.4675	-28.8	V	3.0	39.5	1.0	-67.3	-13.0	-54.3	
	3.3020	-35.8	V	3.0	40.1	1.0	-74.9	-13.0	-61.9	
	1.6510	-18.9	H	3.0	39.1	1.0	-57.0	-13.0	-44.0	
	2.4675	-30.8	H	3.0	39.5	1.0	-69.4	-13.0	-56.4	
	3.3020	-35.7	H	3.0	40.1	1.0	-74.8	-13.0	-61.8	
	Mid Channel (836.5MHz)									
	1.6730	-19.9	V	3.0	39.1	1.0	-58.0	-13.0	-45.0	
	2.5090	-34.3	V	3.0	39.5	1.0	-72.8	-13.0	-59.8	
	3.3460	-35.3	V	3.0	40.1	1.0	-74.4	-13.0	-61.4	
	1.6730	-22.4	H	3.0	39.1	1.0	-60.5	-13.0	-47.5	
	2.5090	-35.5	H	3.0	39.5	1.0	-74.0	-13.0	-61.0	
	3.3460	-35.5	H	3.0	40.1	1.0	-74.7	-13.0	-61.7	
	High Channel (847.5MHz)									
1.6950	-24.6	V	3.0	39.1	1.0	-62.7	-13.0	-49.7		
2.5425	-27.5	V	3.0	39.6	1.0	-66.1	-13.0	-53.1		
3.3900	-35.4	V	3.0	40.2	1.0	-74.6	-13.0	-61.6		
1.6950	-28.2	H	3.0	39.1	1.0	-66.3	-13.0	-53.3		
2.5425	-32.4	H	3.0	39.6	1.0	-71.0	-13.0	-58.0		
3.3900	-35.4	H	3.0	40.2	1.0	-74.6	-13.0	-61.6		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

LTE Band 5 1.4MHz QPSK	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung									
	Project #: 15K21022									
	Date: 06-20-15									
	Test Engineer: Steven.Kim									
	Configuration: EUT / AC Adapter / Earphone, Z Position									
	Mode: TX, LTE BAND 5, 1.4MHz BW,QPSK									
	Chamber		Pre-amplifier		Filter		Limit			
	Chamber 2		AFS42		Filter 1		Part 22			
	f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
	GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
	Low Channel (824.7MHz)									
	1.6494	-13.1	V	3.0	39.1	1.0	-51.2	-13.0	-38.2	
	2.4741	-25.4	V	3.0	39.5	1.0	-63.9	-13.0	-50.9	
	3.2988	-35.8	V	3.0	40.1	1.0	-74.9	-13.0	-61.9	
	1.6494	-17.1	H	3.0	39.1	1.0	-55.2	-13.0	-42.2	
	2.4741	-30.0	H	3.0	39.5	1.0	-68.6	-13.0	-55.6	
	3.2988	-35.2	H	3.0	40.1	1.0	-74.3	-13.0	-61.3	
	Mid Channel (836.5MHz)									
	1.6730	-20.2	V	3.0	39.1	1.0	-58.3	-13.0	-45.3	
	2.5090	-35.2	V	3.0	39.5	1.0	-73.7	-13.0	-60.7	
	3.3460	-35.5	V	3.0	40.1	1.0	-74.7	-13.0	-61.7	
	1.6730	-23.4	H	3.0	39.1	1.0	-61.5	-13.0	-48.5	
	2.5090	-36.0	H	3.0	39.5	1.0	-74.6	-13.0	-61.6	
	3.3460	-35.7	H	3.0	40.1	1.0	-74.8	-13.0	-61.8	
	High Channel (844.3MHz)									
1.6886	-19.6	V	3.0	39.1	1.0	-57.7	-13.0	-44.7		
2.5329	-27.1	V	3.0	39.5	1.0	-65.6	-13.0	-52.6		
3.3772	-35.4	V	3.0	40.2	1.0	-74.6	-13.0	-61.6		
1.6886	-20.6	H	3.0	39.1	1.0	-58.7	-13.0	-45.7		
2.5329	-29.5	H	3.0	39.5	1.0	-68.1	-13.0	-55.1		
3.3772	-35.2	H	3.0	40.2	1.0	-74.4	-13.0	-61.4		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										
LTE Band 5 1.4MHz 16QAM	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung									
	Project #: 15K21022									
	Date: 06-20-15									
	Test Engineer: Steven.Kim									
	Configuration: EUT / AC Adapter / Earphone, Z Position									
	Mode: TX, LTE BAND 5, 1.4MHz BW,16QAM									
	Chamber		Pre-amplifier		Filter		Limit			
	Chamber 2		AFS42		Filter 1		Part 22			
	f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
	GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
	Low Channel (824.7MHz)									
	1.6494	-14.1	V	3.0	39.1	1.0	-52.2	-13.0	-39.2	
	2.4741	-26.5	V	3.0	39.5	1.0	-65.0	-13.0	-52.0	
	3.2988	-35.5	V	3.0	40.1	1.0	-74.6	-13.0	-61.6	
	1.6494	-17.5	H	3.0	39.1	1.0	-55.6	-13.0	-42.6	
	2.4741	-31.3	H	3.0	39.5	1.0	-69.8	-13.0	-56.8	
	3.2988	-35.2	H	3.0	40.1	1.0	-74.3	-13.0	-61.3	
	Mid Channel (836.5MHz)									
	1.6730	-21.3	V	3.0	39.1	1.0	-59.4	-13.0	-46.4	
	2.5090	-35.4	V	3.0	39.5	1.0	-73.9	-13.0	-60.9	
	3.3460	-35.6	V	3.0	40.1	1.0	-74.8	-13.0	-61.8	
	1.6730	-25.1	H	3.0	39.1	1.0	-63.2	-13.0	-50.2	
	2.5090	-36.9	H	3.0	39.5	1.0	-75.5	-13.0	-62.5	
	3.3460	-35.8	H	3.0	40.1	1.0	-74.9	-13.0	-61.9	
	High Channel (844.3MHz)									
1.6886	-20.0	V	3.0	39.1	1.0	-58.1	-13.0	-45.1		
2.5329	-27.7	V	3.0	39.5	1.0	-66.2	-13.0	-53.2		
3.3772	-35.5	V	3.0	40.2	1.0	-74.6	-13.0	-61.6		
1.6886	-21.4	H	3.0	39.1	1.0	-59.5	-13.0	-46.5		
2.5329	-31.6	H	3.0	39.5	1.0	-70.1	-13.0	-57.1		
3.3772	-35.5	H	3.0	40.2	1.0	-74.7	-13.0	-61.7		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										