



HIGH CHANNEL HORIZONTAL

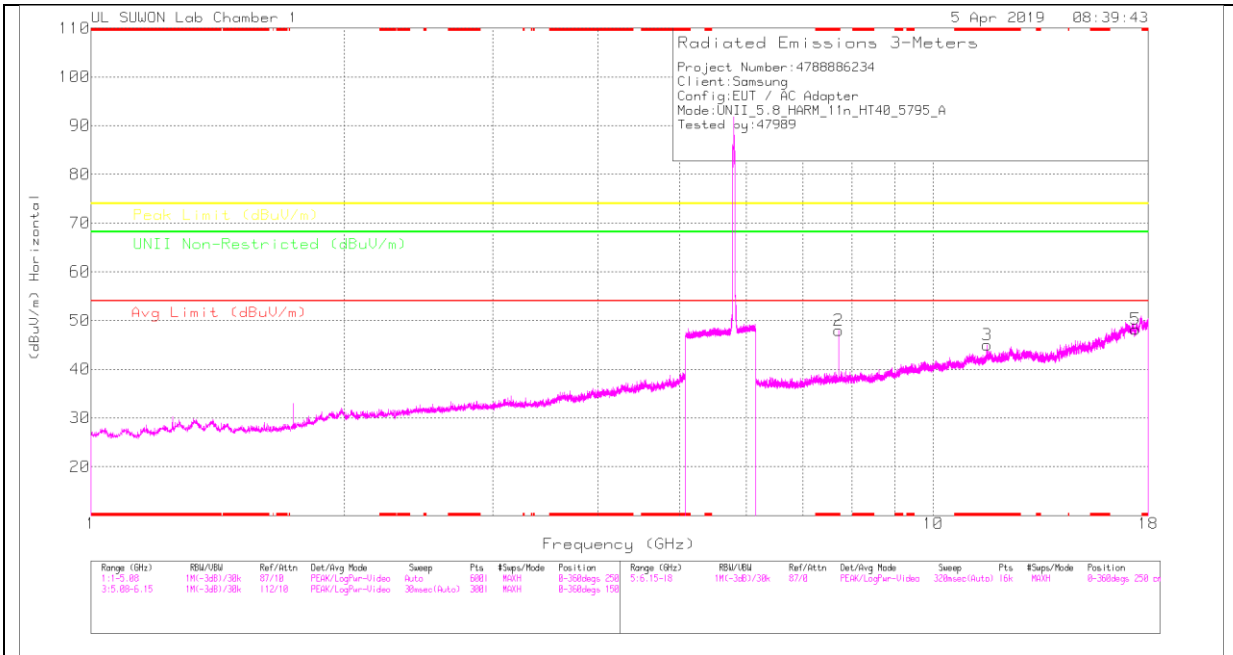

HIGH CHANNEL VERTICAL

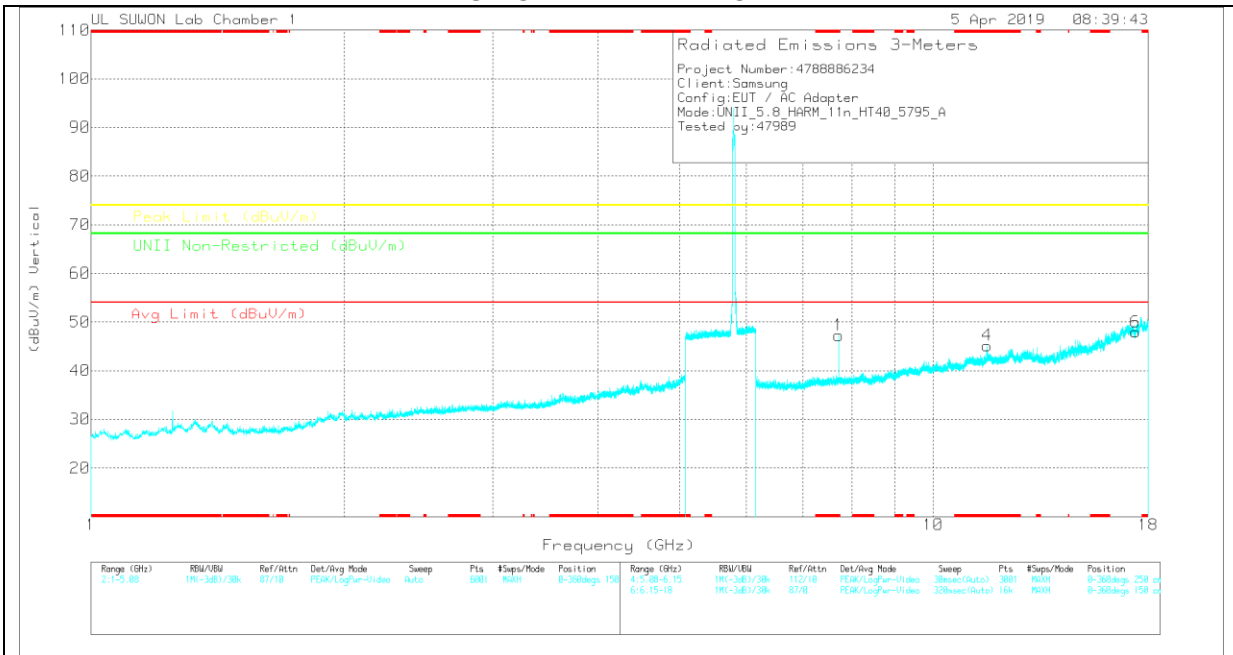

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
2	* 7.727	38.51	PK	35.9	-26.5	0	47.91	-	-	74	-26.09	-	-	0-360	150	H
3	* 11.59	28.83	PK	38.6	-22.4	0	45.03	-	-	74	-28.97	-	-	0-360	150	H
5	17.387	24.21	PK	41.2	-17.2	0	48.21	-	-	-	-	68.2	-19.99	0-360	250	H
1	* 7.726	37.85	PK	35.9	-26.5	0	47.25	-	-	74	-26.75	-	-	0-360	150	V
4	* 11.592	28.98	PK	38.6	-22.4	0	45.18	-	-	74	-28.82	-	-	0-360	150	V
6	17.388	23.8	PK	41.2	-17.1	0	47.9	-	-	-	-	68.2	-20.3	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
* 7.726	43.13	PK-U	35.9	-26.5	0	52.53	-	-	74	-21.47	-	-	110	305	H
* 7.727	38.59	ADR	35.9	-26.5	0	47.99	54	-6.01	-	-	-	-	110	305	H
* 7.727	43.34	PK-U	35.9	-26.5	0	52.74	-	-	74	-21.26	-	-	197	389	V
* 7.727	38.2	ADR	35.9	-26.5	0	47.6	54	-6.4	-	-	-	-	197	389	V
* 11.591	39.64	PK-U	38.6	-22.4	0	55.84	-	-	74	-18.16	-	-	178	155	V
* 11.59	28.11	ADR	38.6	-22.4	0	44.31	54	-9.69	-	-	-	-	178	155	V
* 11.59	39.55	PK-U	38.6	-22.4	0	55.75	-	-	74	-18.25	-	-	220	163	H
* 11.59	28.18	ADR	38.6	-22.4	0	44.38	54	-9.62	-	-	-	-	220	163	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.4.8.TX ABOVE 1GHz 802.11n HT40 1Tx ANT1 IN THE 5.8GHz BAND BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK PLOT

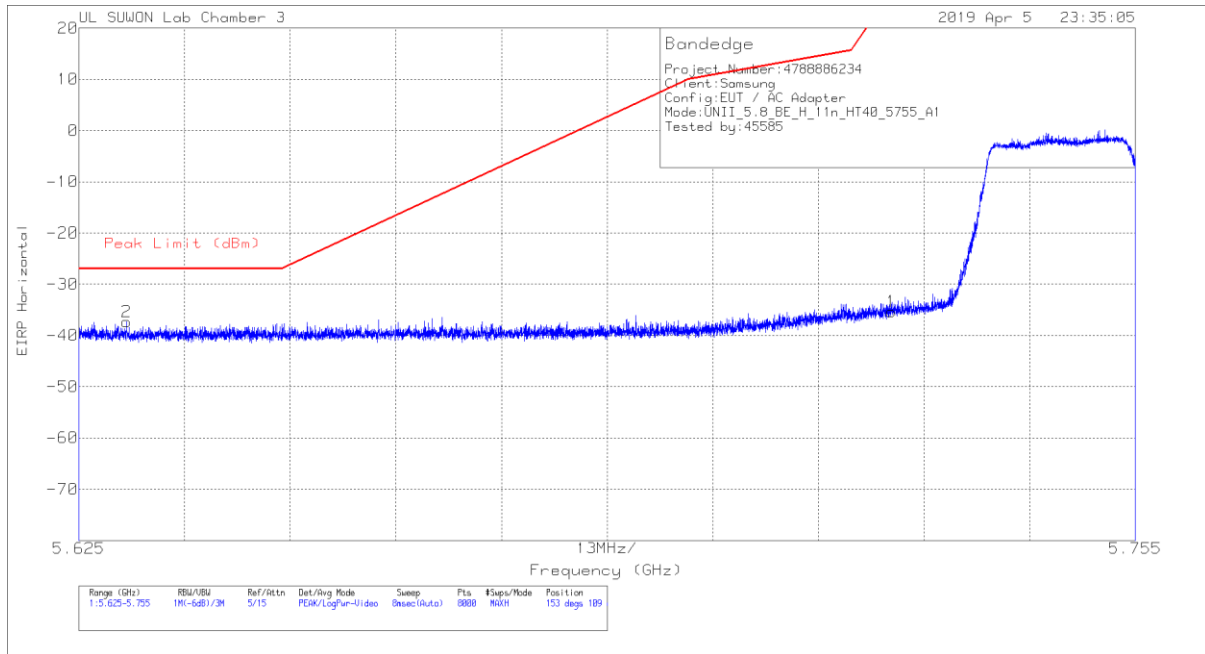


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-64.05	Pk	34.8	-17.9	11.8	0	-35.35	27	-62.35	153	109	H
2	5.631	-65.49	Pk	34.7	-18.3	11.8	0	-37.29	-27	-10.29	153	109	H

Pk - Peak detector

VERTICAL PEAK PLOT

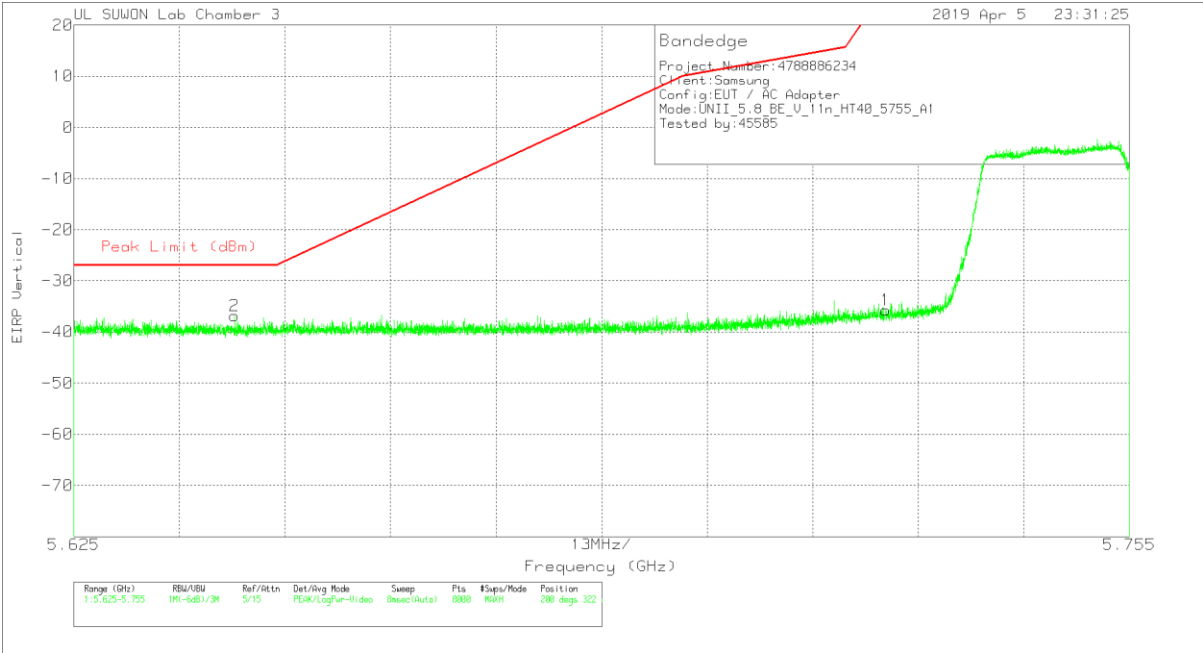


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-64.43	Pk	34.8	-17.9	11.8	0	-35.73	27	-62.73	200	322	V
2	5.645	-65.18	Pk	34.7	-18.2	11.8	0	-36.88	-27	-9.88	200	322	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

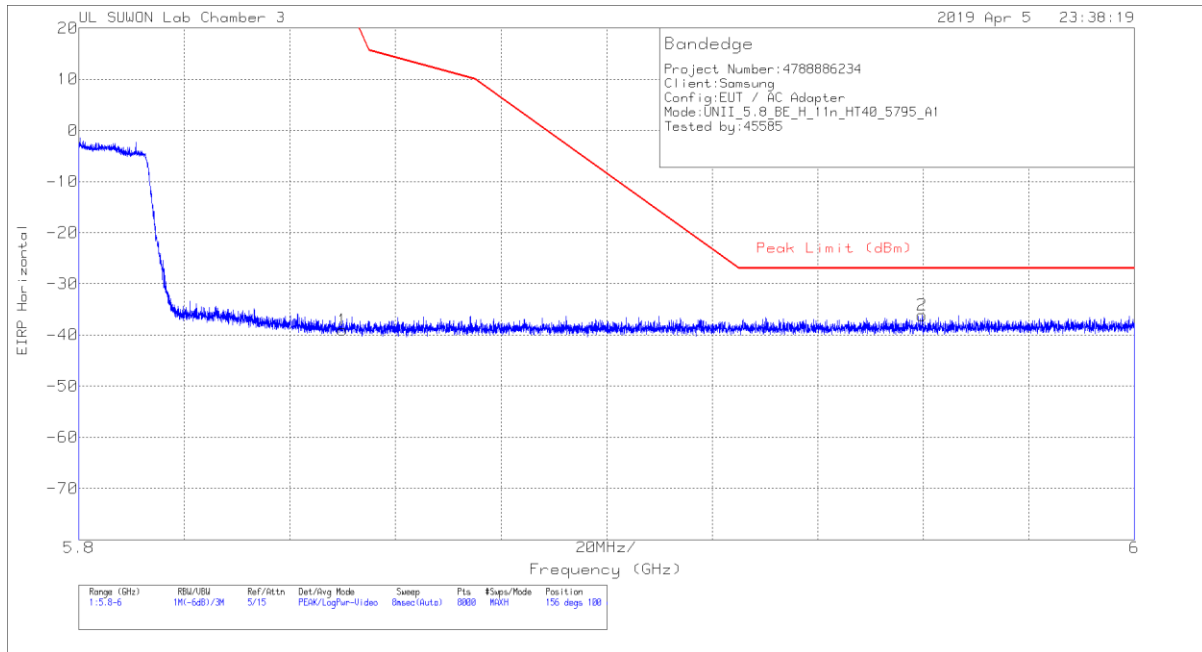


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.15	Pk	35	-17.7	11.8	0	-39.05	26.99	-66.04	156	100	H
2	5.96	-65.35	Pk	35.1	-17.7	11.8	0	-36.15	-27	-9.15	156	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

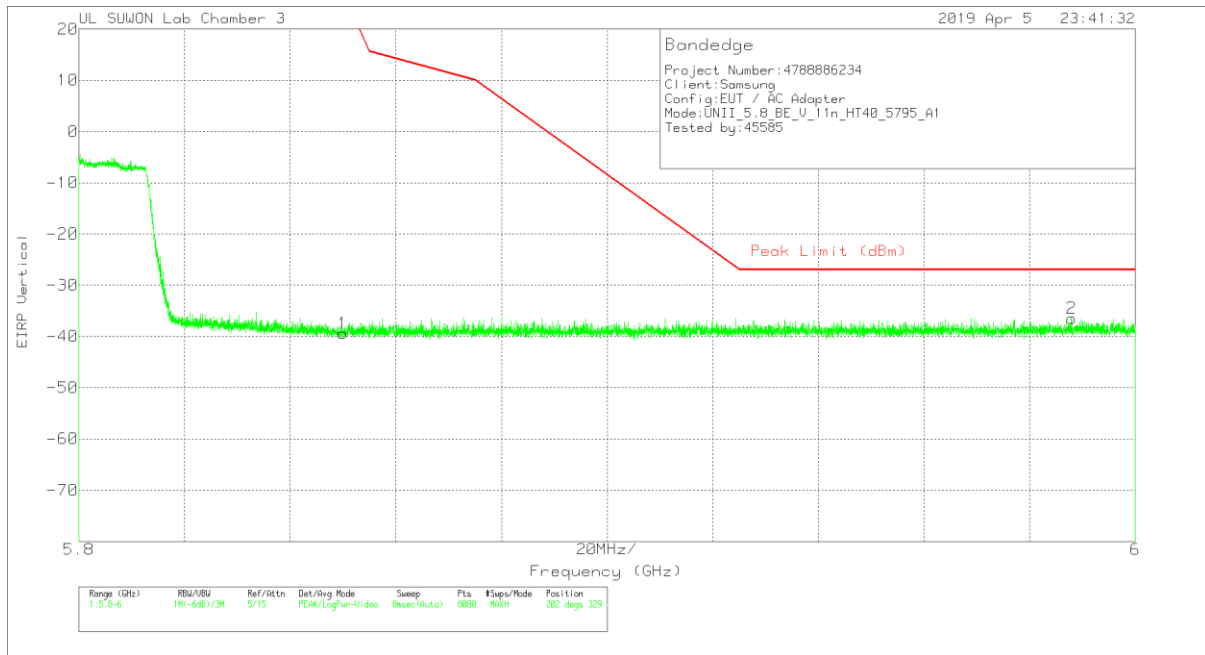


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.54	Pk	35	-17.7	11.8	0	-39.44	26.99	-66.43	202	329	V
2	5.988	-65.76	Pk	35.1	-17.6	11.8	0	-36.46	-27	-9.46	202	329	V

Pk - Peak detector

LOW CHANNEL HORIZONTAL

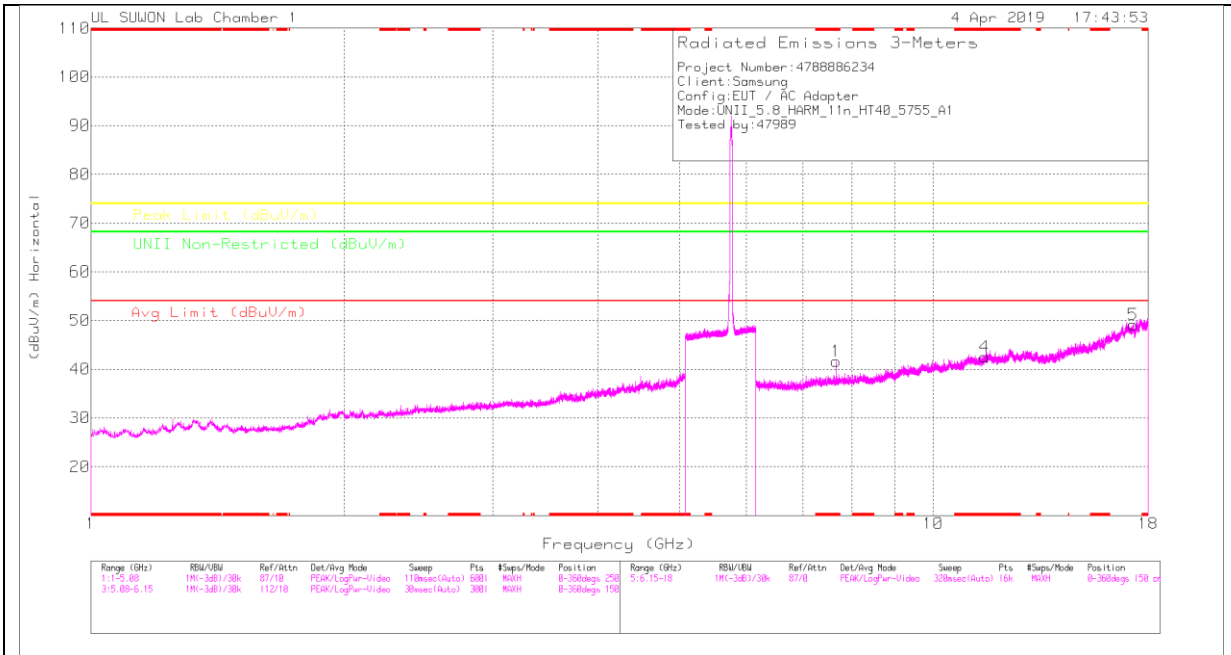

LOW CHANNEL VERTICAL

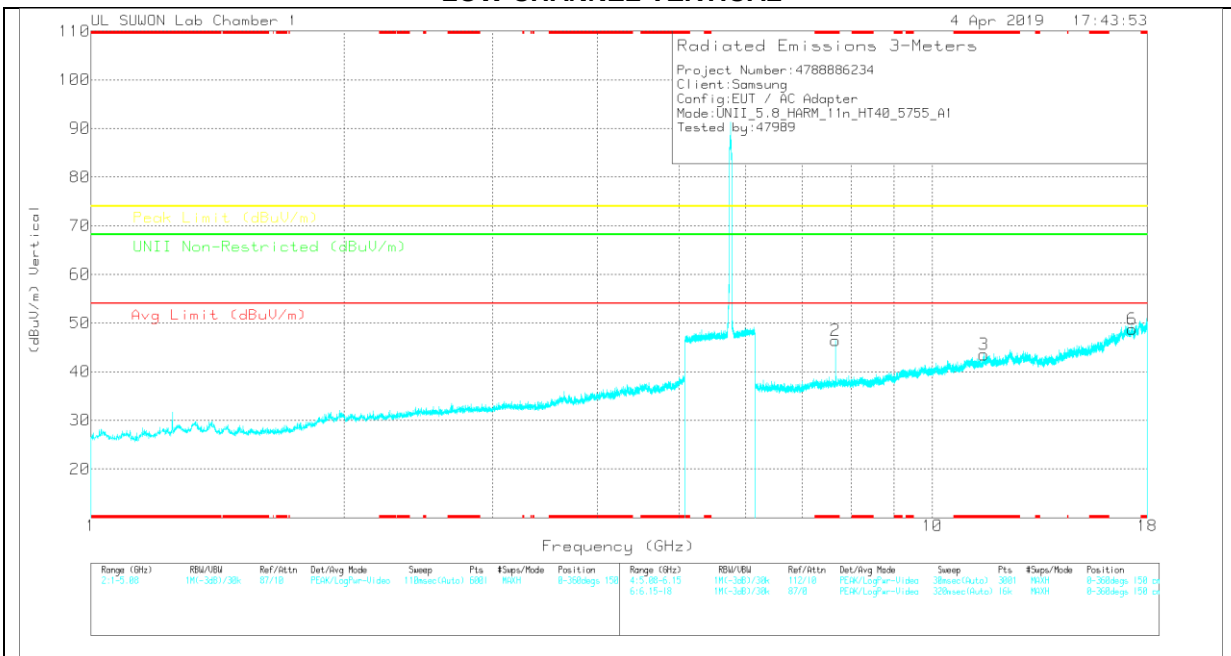

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.673	32.67	PK	35.9	-26.9	0	41.67	-	-	74	-32.33	-	-	-	150	H
4	* 11.513	26.27	PK	38.5	-22.3	0	42.47	-	-	74	-31.53	-	-	0-360	150	H
5	17.264	24.28	PK	41.3	-16.5	0	49.08	-	-	-	-	68.2	-19.12	0-360	150	H
2	* 7.673	37.43	PK	35.9	-26.9	0	46.43	-	-	74	-27.57	-	-	0-360	150	V
3	* 11.513	27.3	PK	38.5	-22.3	0	43.5	-	-	74	-30.5	-	-	0-360	250	V
6	17.266	23.85	PK	41.3	-16.4	0	48.75	-	-	-	-	68.2	-19.45	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.673	41.37	PK-U	35.9	-26.9	0	50.37	-	-	74	-23.63	-	-	102	100	H
* 7.673	33.72	ADR	35.9	-26.9	0	42.72	54	-11.28	-	-	-	-	102	100	H
* 7.673	43.29	PK-U	35.9	-26.9	0	52.29	-	-	74	-21.71	-	-	75	100	V
* 7.673	36.88	ADR	35.9	-26.9	0	45.88	54	-8.12	-	-	-	-	75	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

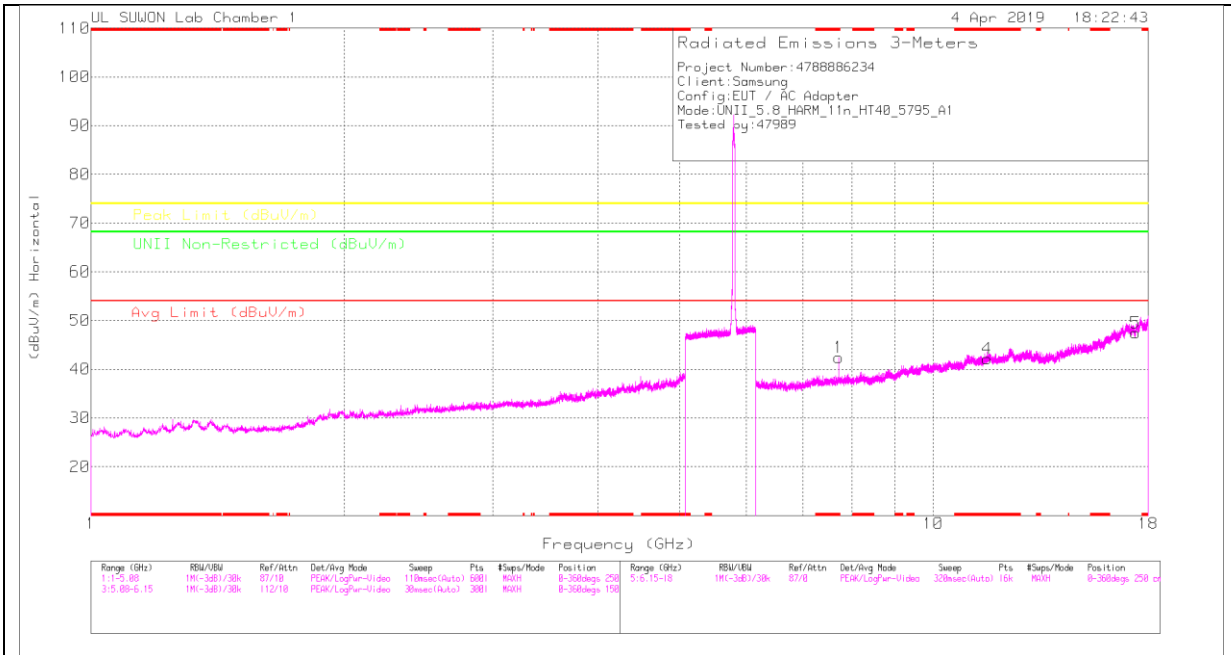

HIGH CHANNEL VERTICAL

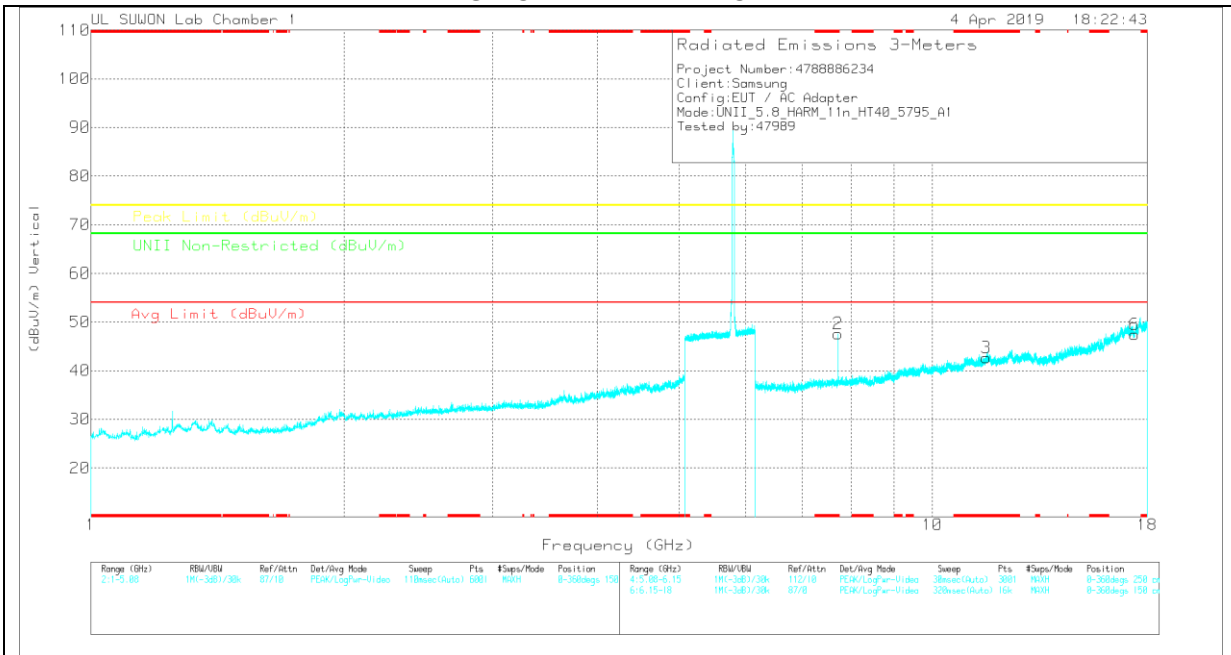

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	U/NR Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 7.726	33.03	PK	35.9	-26.5	0	42.43	-	-	74	-31.57	-	-	0-360	150	H
4	* 11.59	25.91	PK	38.6	-22.4	0	42.11	-	-	74	-31.89	-	-	0-360	250	H
5	17.385	23.39	PK	41.2	-17.2	0	47.39	-	-	-	-	68.2	-20.81	0-360	150	H
2	* 7.727	38.23	PK	35.9	-26.5	0	47.63	-	-	74	-26.37	-	-	0-360	150	V
3	* 11.591	26.45	PK	38.6	-22.4	0	42.65	-	-	74	-31.35	-	-	0-360	150	V
6	17.385	23.48	PK	41.2	-17.2	0	47.48	-	-	-	-	68.2	-20.72	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	U/NR Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 7.727	42.13	PK-U	35.9	-26.5	0	51.53	-	-	74	-22.47	-	-	22	112	H
* 7.727	33.84	ADR	35.9	-26.5	0	43.24	54	-10.76	-	-	-	-	22	112	H
* 7.727	43.93	PK-U	35.9	-26.5	0	53.33	-	-	74	-20.67	-	-	79	101	V
* 7.727	38.74	ADR	35.9	-26.5	0	48.14	54	-5.86	-	-	-	-	79	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.4.9.TX ABOVE 1GHz 802.11n HT40 1Tx ANT2 IN THE 5.8GHz BAND BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK PLOT

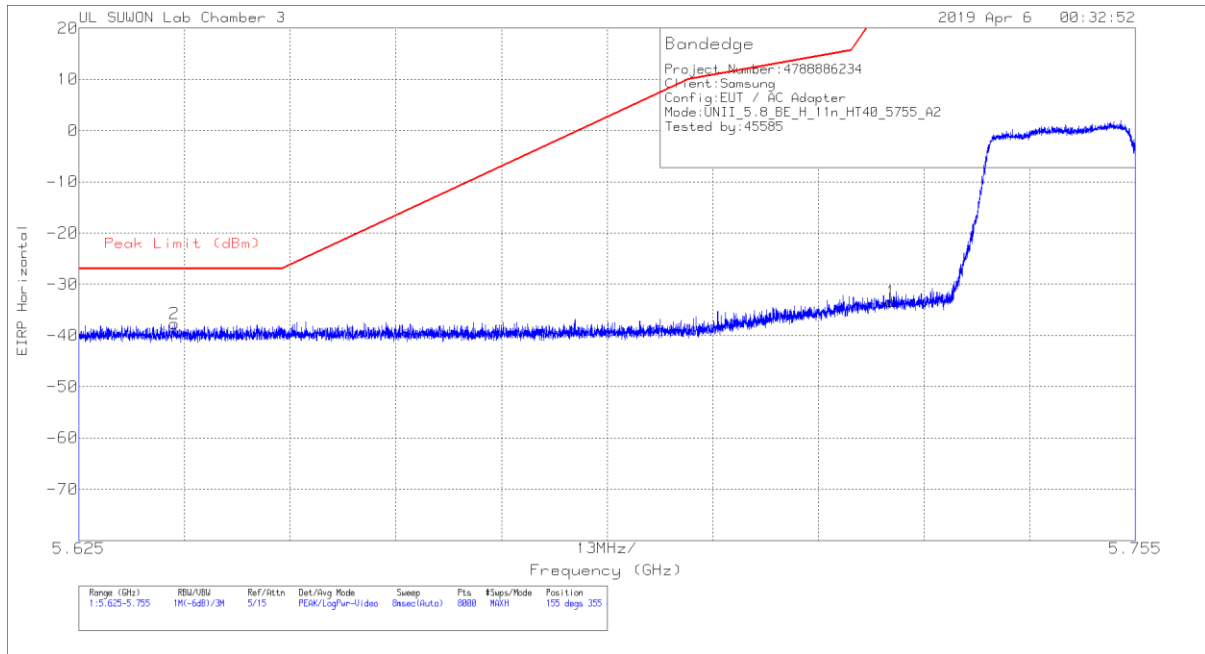


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-62.08	Pk	34.8	-17.9	11.8	0	-33.38	27	-60.38	155	355	H
2	5.637	-66.02	Pk	34.7	-18.2	11.8	0	-37.72	-27	-10.72	155	355	H

Pk - Peak detector

VERTICAL PEAK PLOT

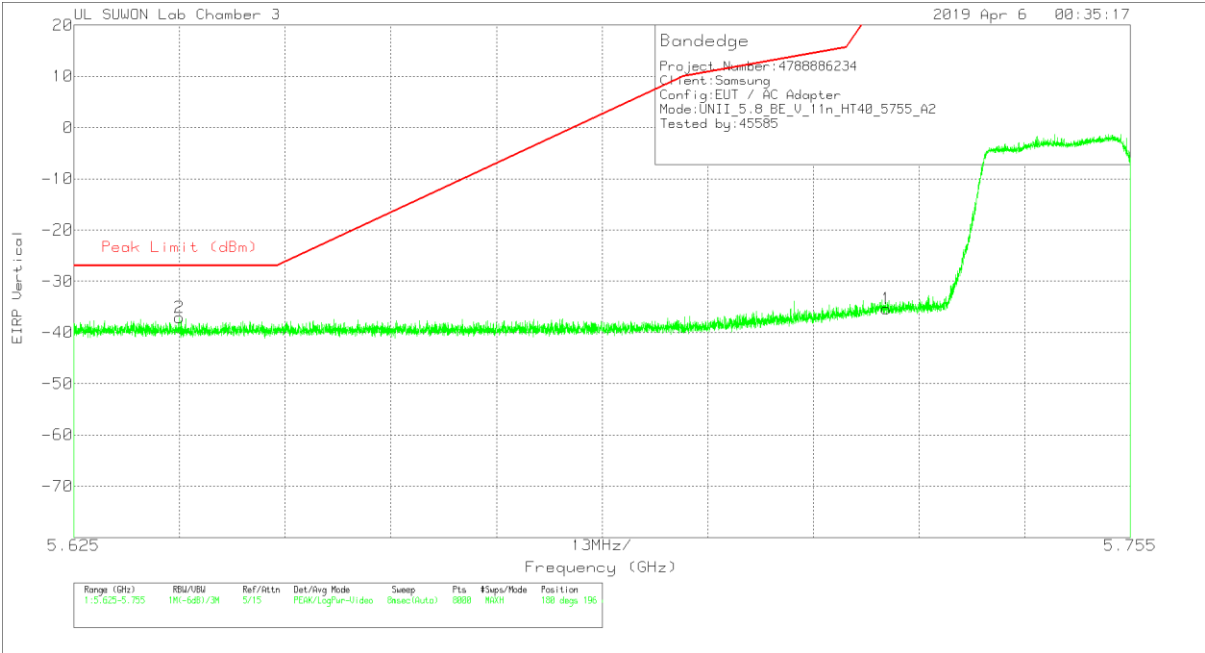


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-64.08	Pk	34.8	-17.9	11.8	0	-35.38	27	-62.38	180	196	V
2	5.638	-65.29	Pk	34.7	-18.3	11.8	0	-37.09	-27	-10.09	180	196	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

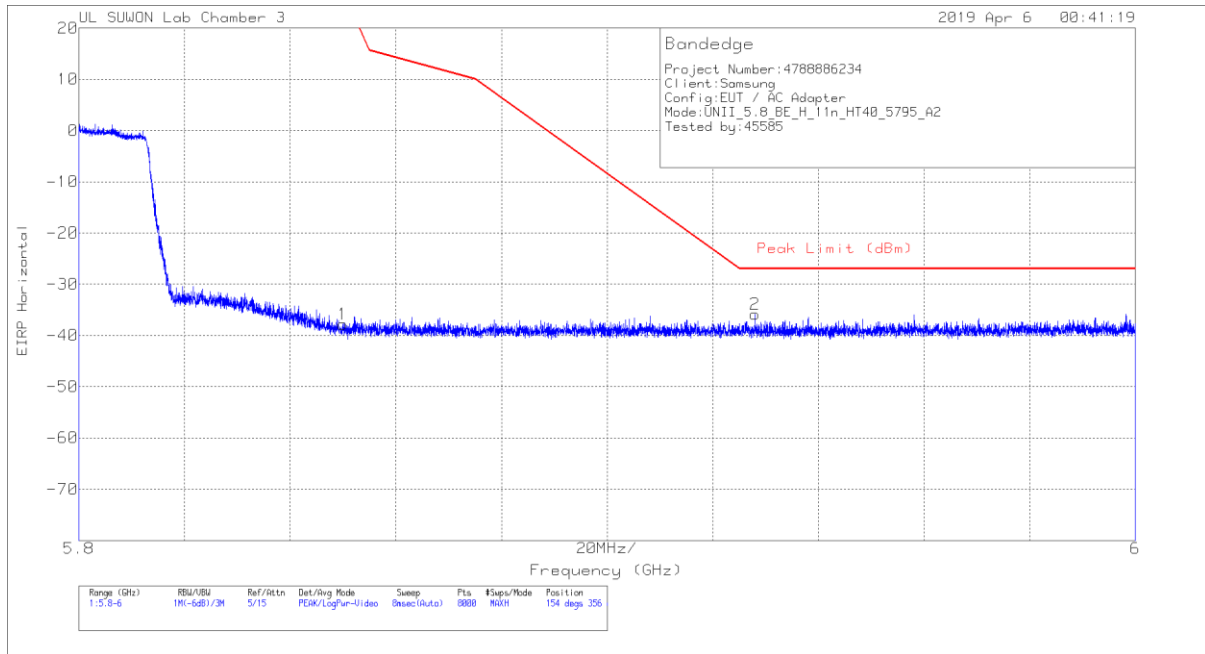


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.9	Pk	35	-17.7	11.8	0	-37.8	26.99	-64.79	154	356	H
2	5.928	-65.06	Pk	35.1	-17.7	11.8	0	-35.86	-27	-8.86	154	356	H

Pk - Peak detector

VERTICAL PEAK PLOT

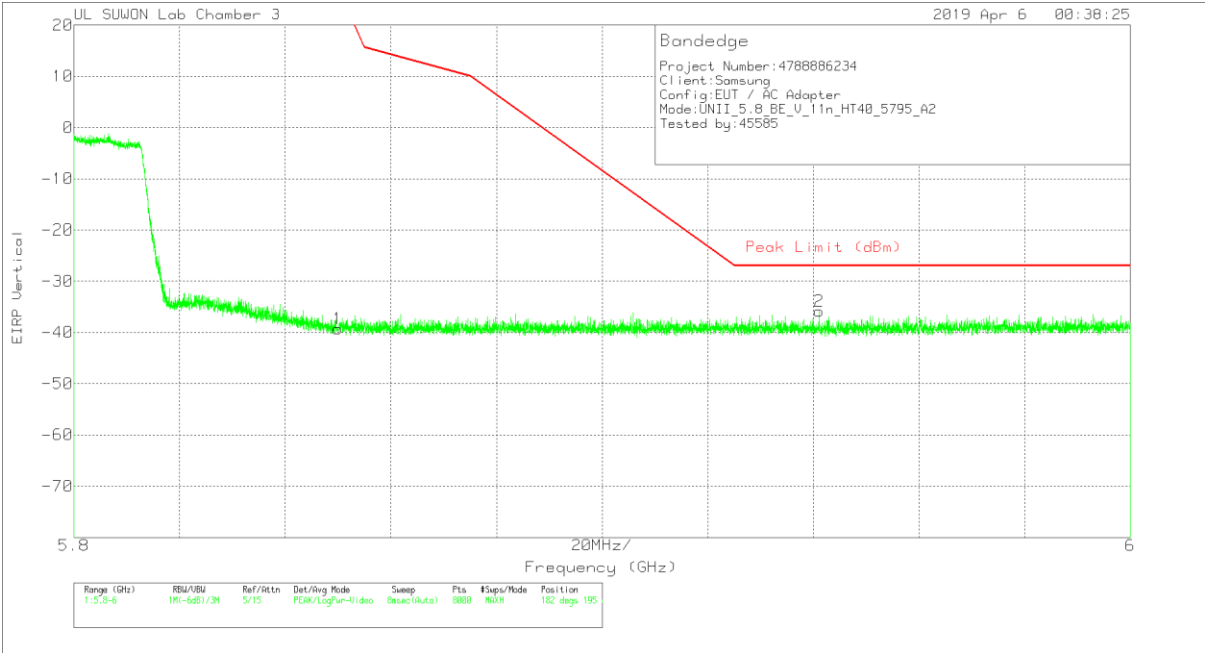


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.43	Pk	35	-17.7	11.8	0	-39.33	26.99	-66.32	182	195	V
2	5.941	-65.03	Pk	35.1	-17.7	11.8	0	-35.83	-27	-8.83	182	195	V

Pk - Peak detector

LOW CHANNEL HORIZONTAL

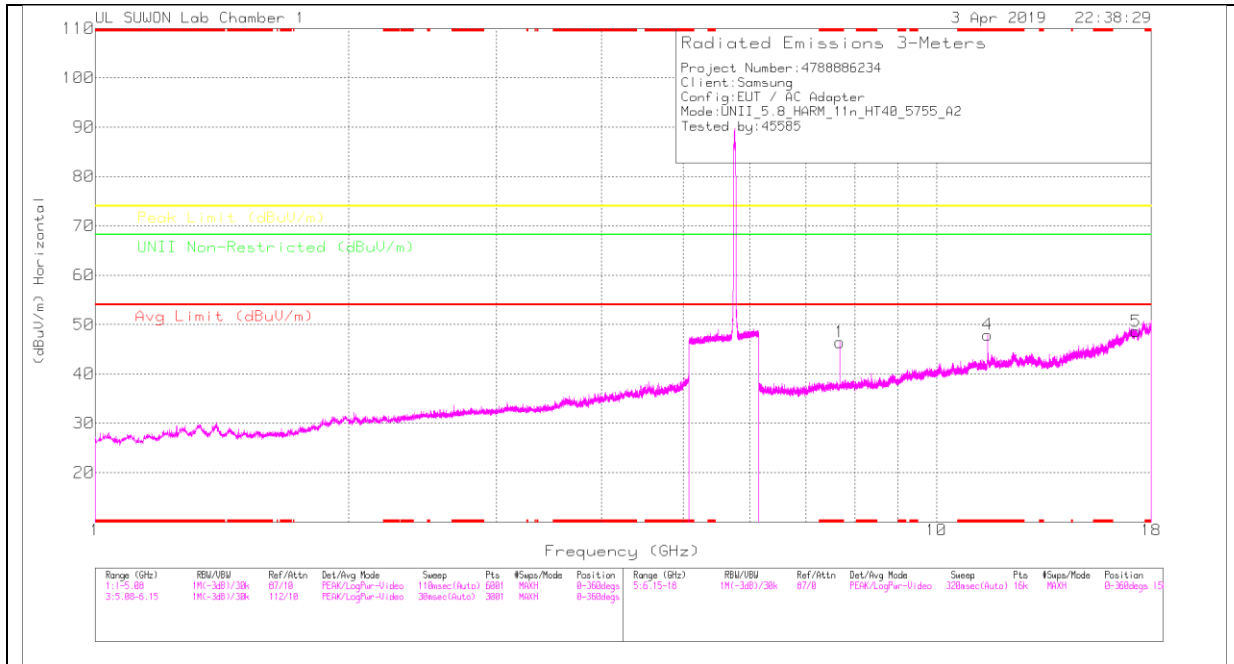

LOW CHANNEL VERTICAL

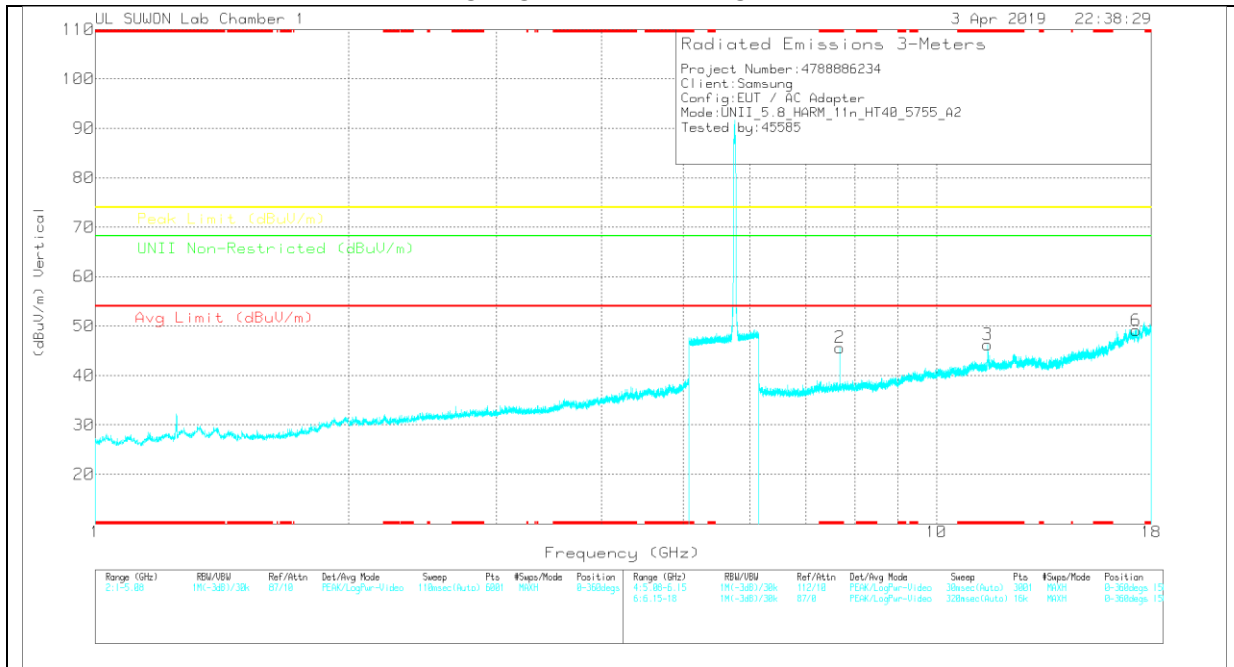

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 7.673	37.43	PK	35.9	-26.9	0	46.43	-	-	74	-27.57	-	-	-	150	H
4	* 11.51	31.73	PK	38.5	-22.3	0	47.93	-	-	74	-26.07	-	-	-	150	H
5	17.265	23.8	PK	41.3	-16.5	0	48.6	-	-	-	-	68.2	-19.6	-	250	H
2	* 7.673	36.64	PK	35.9	-26.9	0	45.64	-	-	74	-28.36	-	-	-	250	V
3	* 11.51	30.05	PK	38.5	-22.3	0	46.25	-	-	74	-27.75	-	-	-	150	V
6	17.265	24.35	PK	41.3	-16.5	0	49.15	-	-	-	-	68.2	-19.05	-	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBm)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBm/Hz)	Avg Limit (dBm/Hz)	Margin (dB)	Peak Limit (dBm/Hz)	Margin (dB)	UNII Non-Restricted (dBm/Hz)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 7.674	42.55	PK-U	35.9	-26.9	0	51.55	-	-	74	-22.45	-	-	100	136	H
* 7.673	35.93	ADR	35.9	-26.9	0	44.93	54	-9.07	-	-	-	-	100	136	H
* 7.673	42.63	PK-U	35.9	-26.9	0	51.63	-	-	74	-22.37	-	-	216	168	V
* 7.673	35.82	ADR	35.9	-26.9	0	44.82	54	-9.18	-	-	-	-	216	168	V
* 11.51	40.35	PK-U	38.5	-22.3	0	56.55	-	-	74	-17.45	-	-	183	133	V
* 11.51	30.21	ADR	38.5	-22.3	0	46.41	54	-7.59	-	-	-	-	183	133	V
* 11.51	42.44	PK-U	38.5	-22.3	0	58.64	-	-	74	-15.36	-	-	222	162	H
* 11.51	32.83	ADR	38.5	-22.3	0	49.03	54	-4.97	-	-	-	-	222	162	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

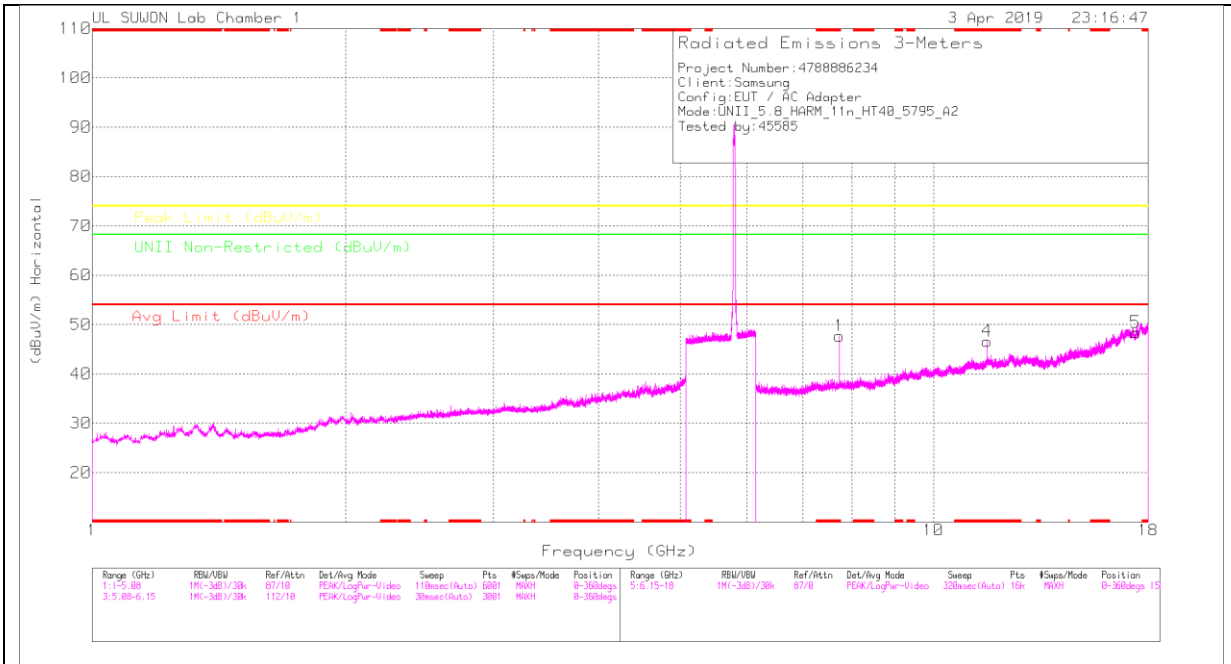

HIGH CHANNEL VERTICAL

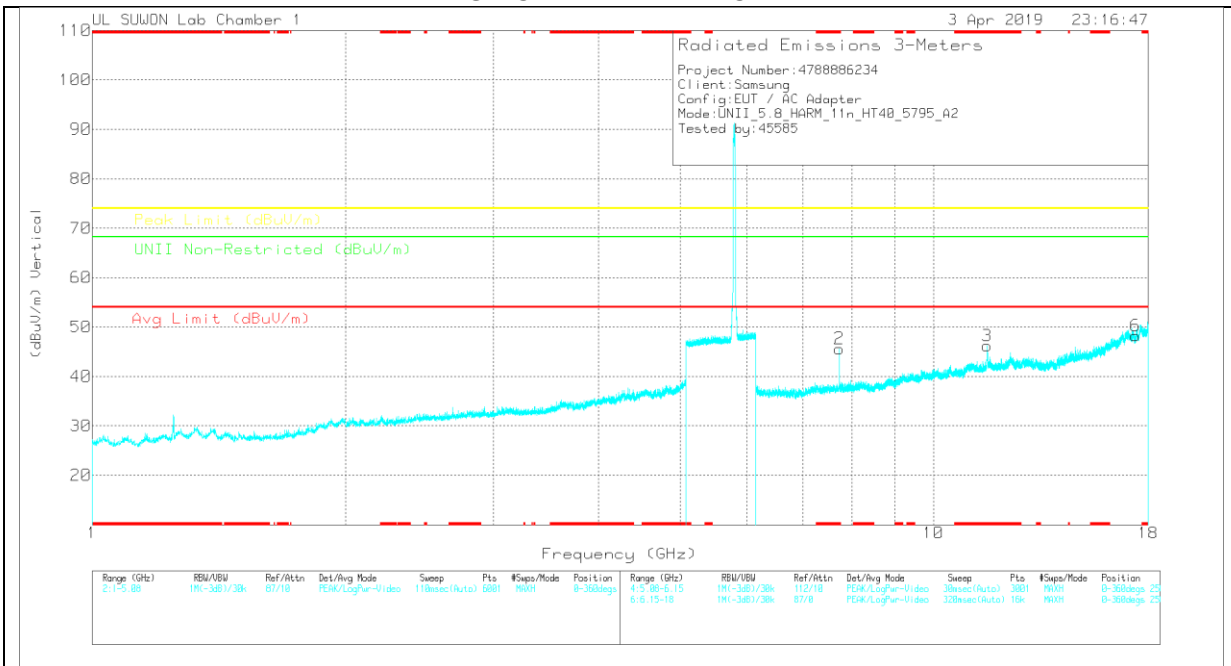

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UHF Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 7.727	38.3	PK	35.9	-26.5	0	47.7	-	-	74	-26.3	-	-	0-360	150	H
4	* 11.59	30.44	PK	38.6	-22.4	0	46.64	-	-	74	-27.36	-	-	0-360	150	H
5	17.378	24.6	PK	41.2	-17.4	0	48.4	-	-	-	-	68.2	-19.8	0-360	250	H
2	* 7.727	36.23	PK	35.9	-26.5	0	45.63	-	-	74	-28.37	-	-	0-360	150	V
3	* 11.59	29.99	PK	38.6	-22.4	0	46.19	-	-	74	-27.81	-	-	0-360	150	V
6	17.383	24.25	PK	41.2	-17.2	0	48.25	-	-	-	-	68.2	-19.95	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UHF Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
* 7.727	44.14	PK-U	35.9	-26.5	0	53.54	-	-	74	-20.46	-	-	98	159	H
* 7.727	37.74	ADR	35.9	-26.5	0	47.14	54	-6.86	-	-	-	-	98	159	H
* 7.726	44.34	PK-U	35.9	-26.5	0	53.74	-	-	74	-20.26	-	-	195	392	V
* 7.727	39.38	ADR	35.9	-26.5	0	48.78	54	-5.22	-	-	-	-	195	392	V
* 11.59	38.7	PK-U	38.6	-22.4	0	54.9	-	-	74	-19.1	-	-	194	145	V
* 11.59	28.2	ADR	38.6	-22.4	0	44.4	54	-9.6	-	-	-	-	194	145	V
* 11.59	40.25	PK-U	38.6	-22.4	0	56.45	-	-	74	-17.55	-	-	224	171	H
* 11.59	30.46	ADR	38.6	-22.4	0	46.66	54	-7.34	-	-	-	-	224	171	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.4.10. TX ABOVE 1GHz 802.11ac VHT80 2Tx CDD MODE IN THE 5.8GHz BAND BANDEDGE (Lower side)

HORIZONTAL PEAK PLOT

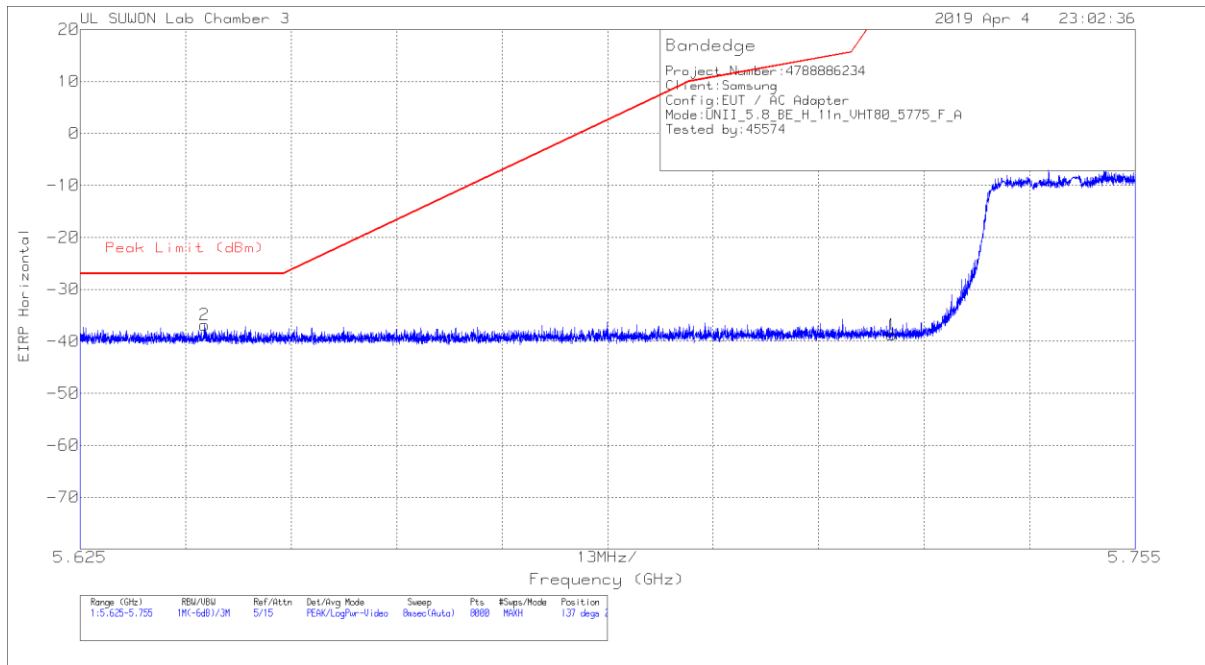


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_0020595 9	10dB[dB]	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-67.49	Pk	34.8	-17.9	11.8	-38.79	27	-65.79	137	212	H
2	5.64	-65.07	Pk	34.7	-18.3	11.8	-36.87	-27	-9.87	137	212	H

Pk - Peak detector

VERTICAL PEAK PLOT

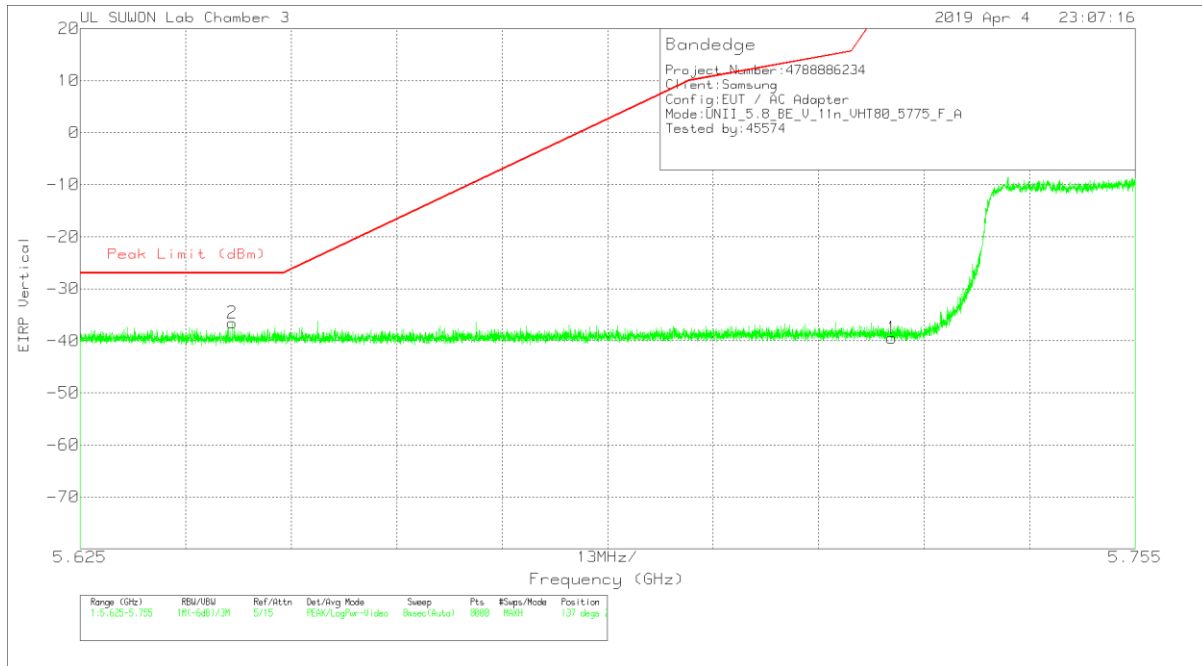


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_0020595 9	10dB[dB]	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-68.14	Pk	34.8	-17.9	11.8	-39.44	27	-66.44	137	235	V
2	5.644	-64.85	Pk	34.7	-18.2	11.8	-36.55	-27	-9.55	137	235	V

Pk - Peak detector

BANDEDGE (Upper side)

HORIZONTAL PEAK PLOT

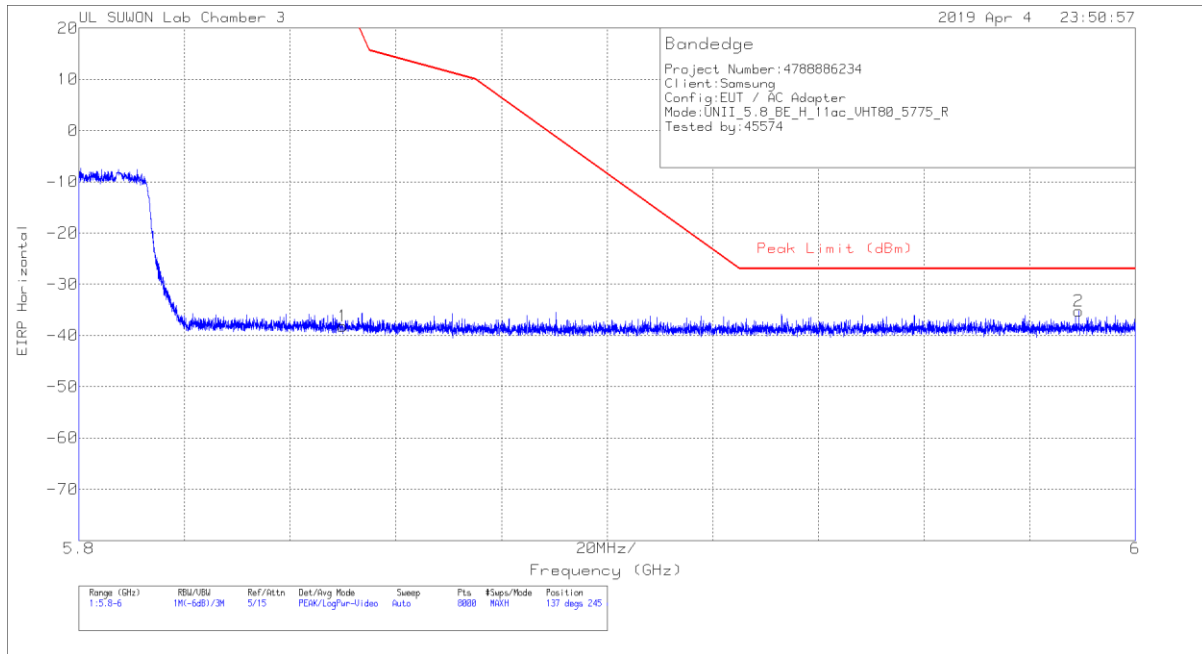


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_0020595 9	10dB[dB]	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.23	Pk	35	-17.7	11.8	-38.13	26.99	-65.12	137	245	H
2	5.989	-64.49	Pk	35.1	-17.6	11.8	-35.19	-27	-8.19	137	245	H

Pk - Peak detector

VERTICAL PEAK PLOT

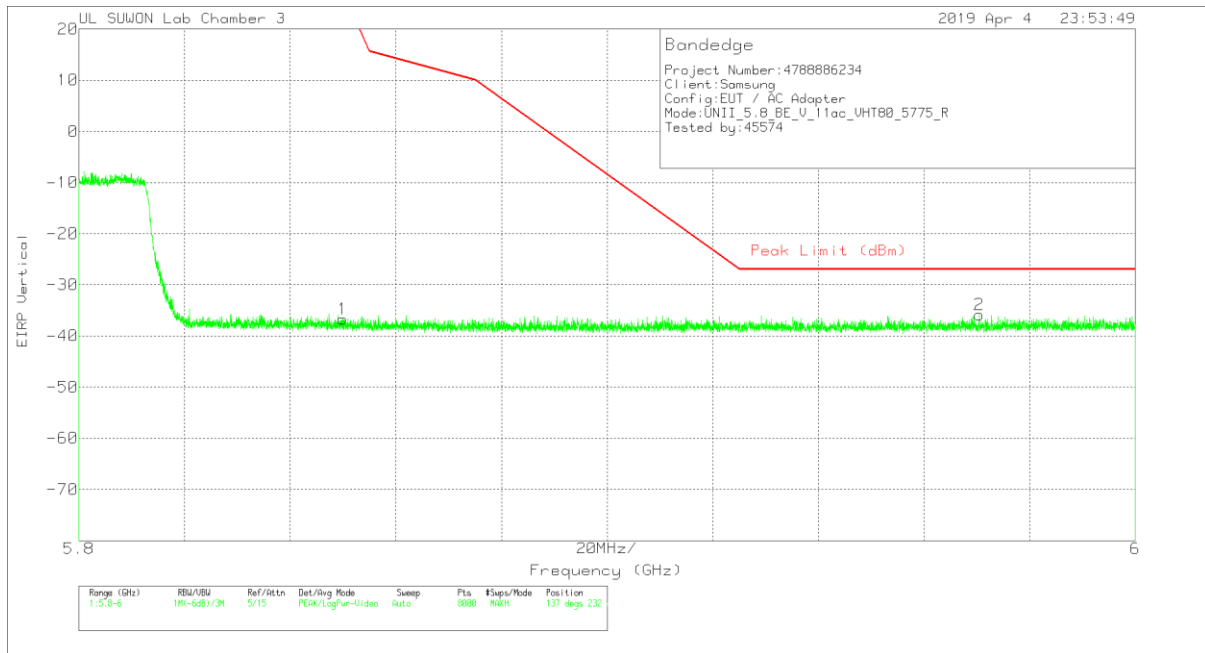


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_0020595 9	10dB[dB]	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.85	Pk	35	-17.7	11.8	-36.75	26.99	-63.74	137	232	V
2	5.97	-65	Pk	35.1	-17.7	11.8	-35.8	-27	-8.8	137	232	V

Pk - Peak detector

MID CHANNEL HORIZONTAL

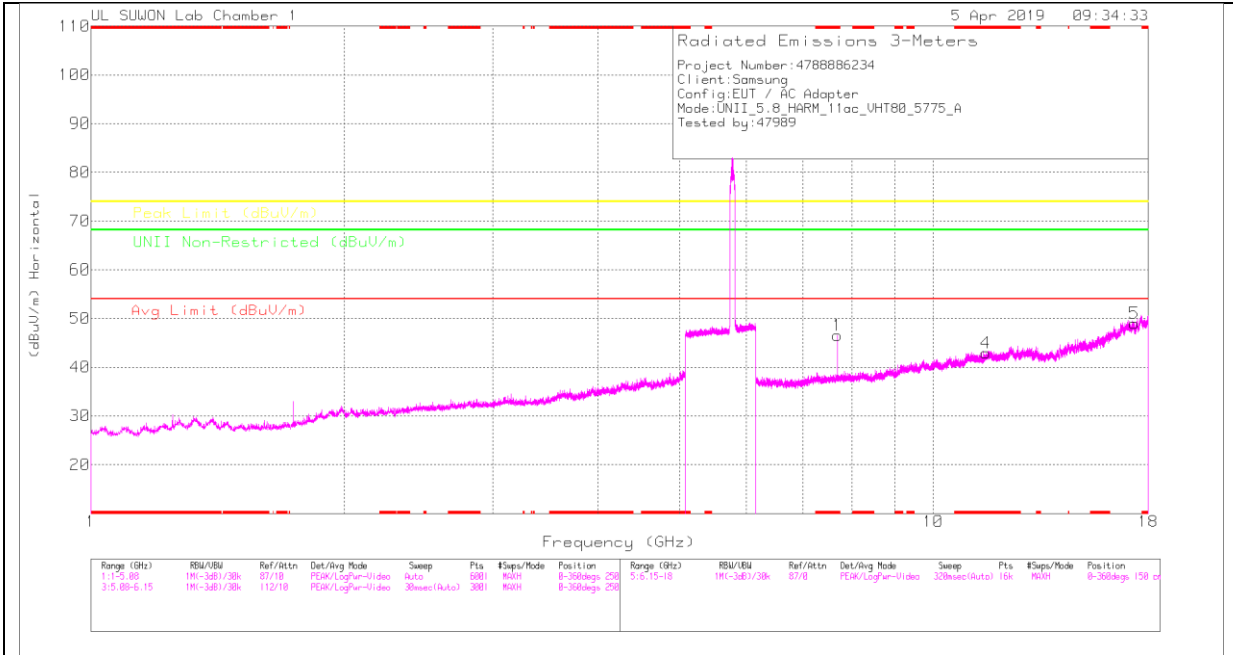

MID CHANNEL VERTICAL

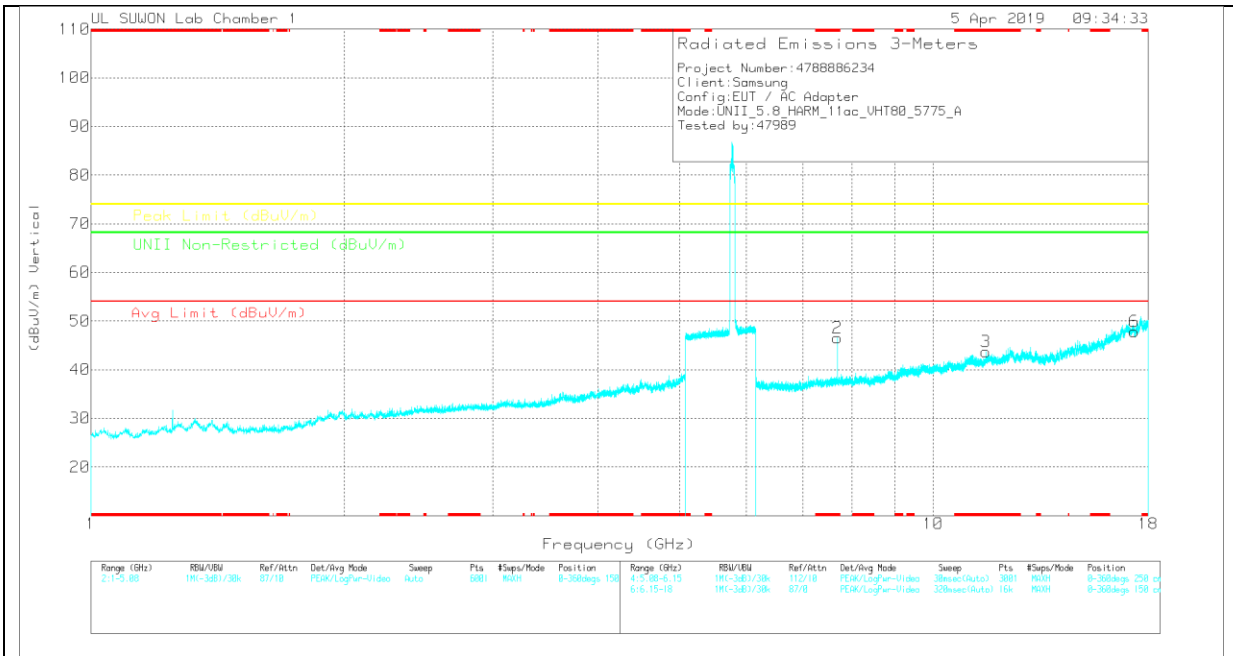

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.699	37.44	PK	35.9	-26.8	0	46.54	-	-	74	-27.46	-	-	0-360	150	H
4	* 11.55	26.88	PK	38.5	-22.5	0	42.88	-	-	74	-31.12	-	-	0-360	250	H
5	17.319	24.68	PK	41.3	-17	0	48.98	-	-	-	-	68.2	-19.22	0-360	250	H
2	* 7.699	37.47	PK	35.9	-26.8	0	46.57	-	-	74	-27.43	-	-	0-360	150	V
3	* 11.543	27.61	PK	38.5	-22.4	0	43.71	-	-	74	-30.29	-	-	0-360	150	V
6	17.324	23.67	PK	41.3	-17.1	0	47.87	-	-	-	-	68.2	-20.33	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.7	42.7	PK-U	35.9	-26.8	0	51.8	-	-	74	-22.2	-	-	112	152	H
* 7.7	36.95	ADR	35.9	-26.8	0	46.05	54	-7.95	-	-	-	-	112	152	H
* 7.7	42.8	PK-U	35.9	-26.8	0	51.9	-	-	74	-22.1	-	-	156	270	V
* 7.7	37.16	ADR	35.9	-26.8	0	46.26	54	-7.74	-	-	-	-	156	270	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.4.11. TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT1 IN THE 5.8GHz BAND BANDEDGE (Lower side)

HORIZONTAL PEAK PLOT

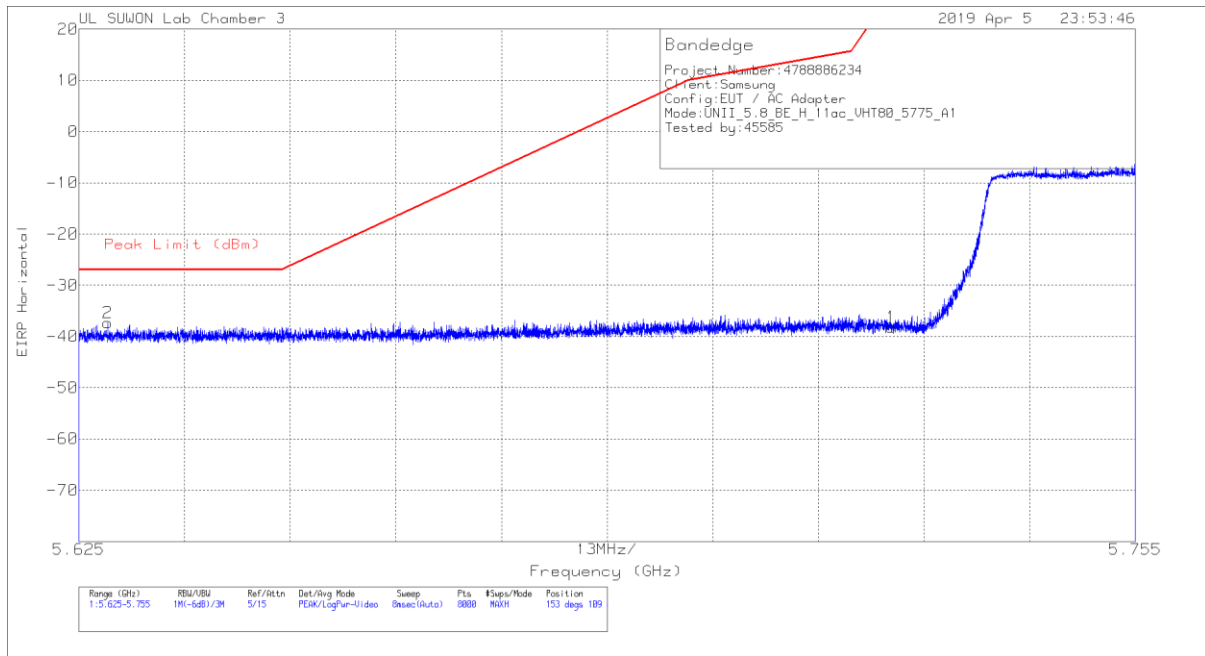


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_0020595 9	10dB[dB]	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-66.86	Pk	34.8	-17.9	11.8	-38.16	27	-65.16	153	109	H
2	5.629	-65.57	Pk	34.7	-18.3	11.8	-37.37	-27	-10.37	153	109	H

Pk - Peak detector

VERTICAL PEAK PLOT

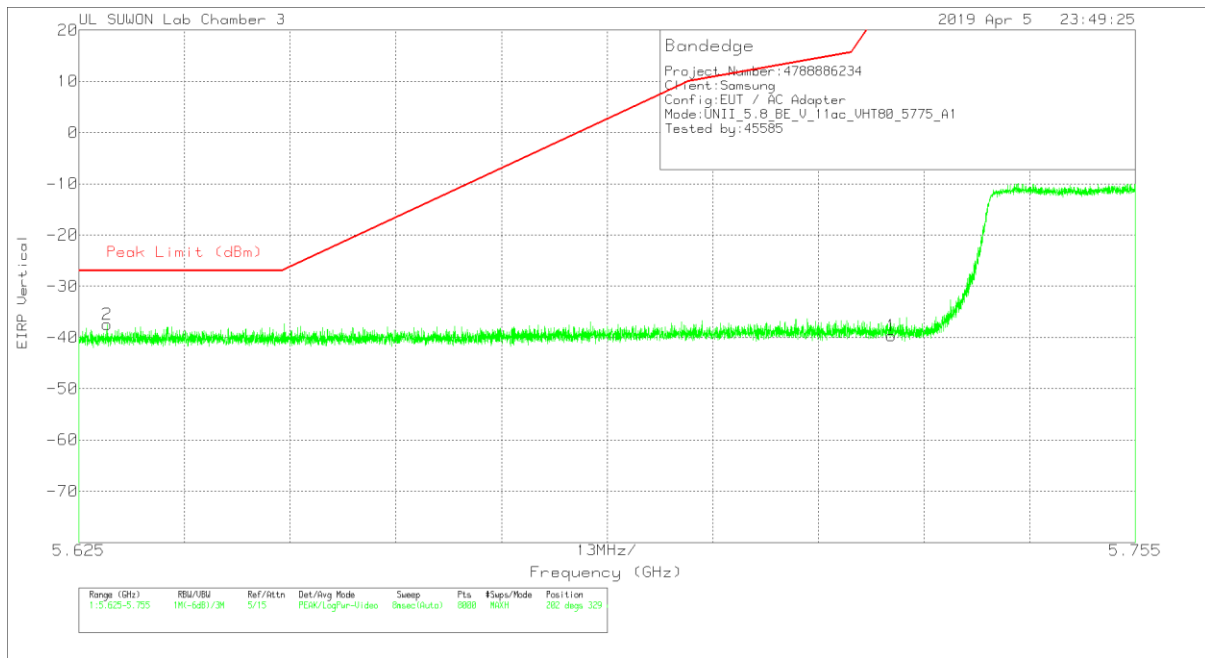


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059_59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-68.37	Pk	34.8	-17.9	11.8	0	-39.67	27	-66.67	202	329	V
2	5.628	-65.59	Pk	34.7	-18.3	11.8	0	-37.39	-27	-10.39	202	329	V

Pk - Peak detector

BANDEDGE (Upper side)

HORIZONTAL PEAK PLOT

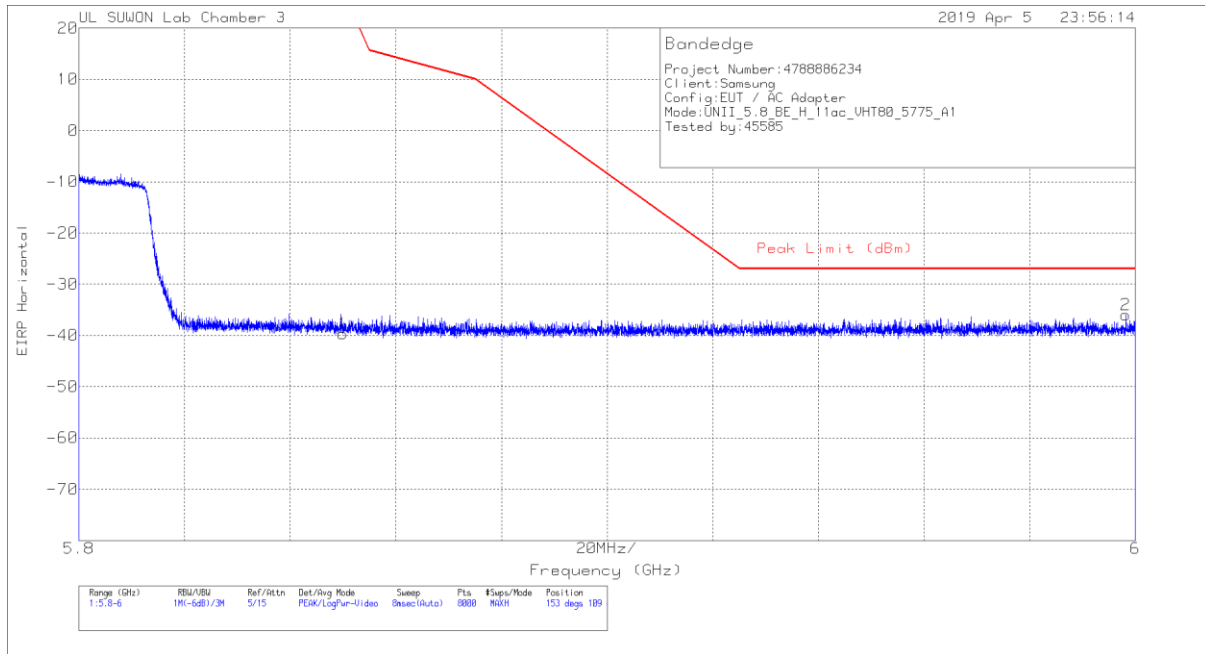


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.7	Pk	35	-17.7	11.8	0	-39.6	26.99	-66.59	153	109	H
2	5.998	-65.26	Pk	35.1	-17.6	11.8	0	-35.96	-27	-8.96	153	109	H

Pk - Peak detector

VERTICAL PEAK PLOT

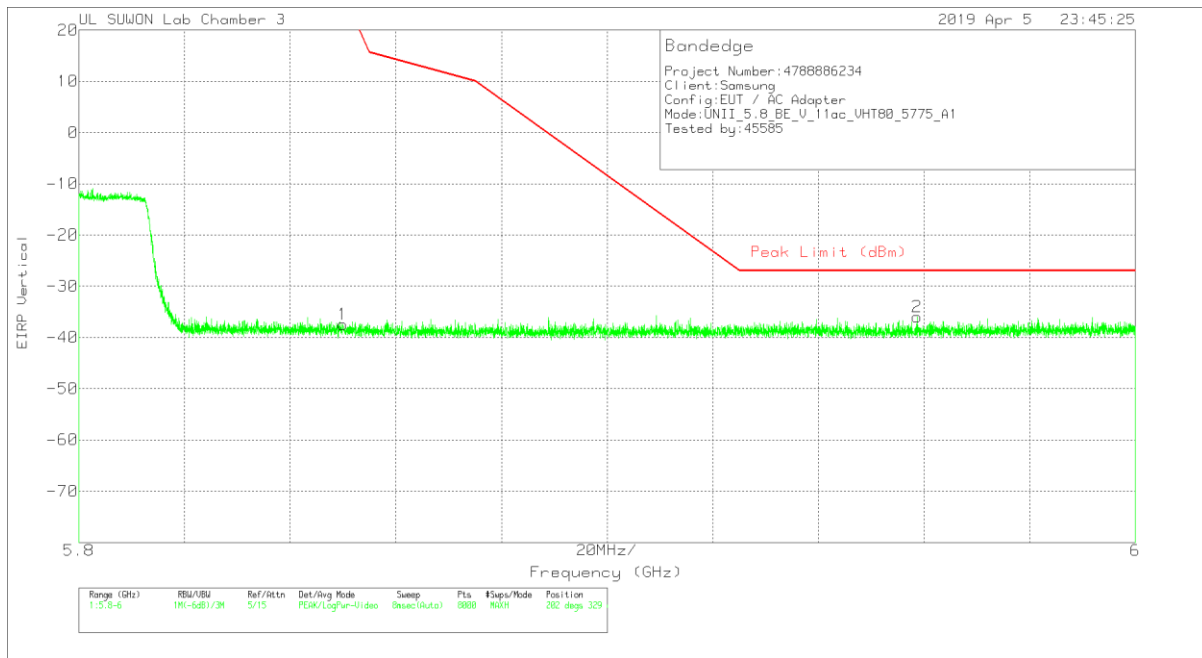


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059_59	10dB(dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.49	Pk	35	-17.7	11.8	0	-37.39	26.99	-64.38	202	329	V
2	5.959	-65.15	Pk	35.1	-17.7	11.8	0	-35.95	-27	-8.95	202	329	V

Pk - Peak detector

MID CHANNEL HORIZONTAL

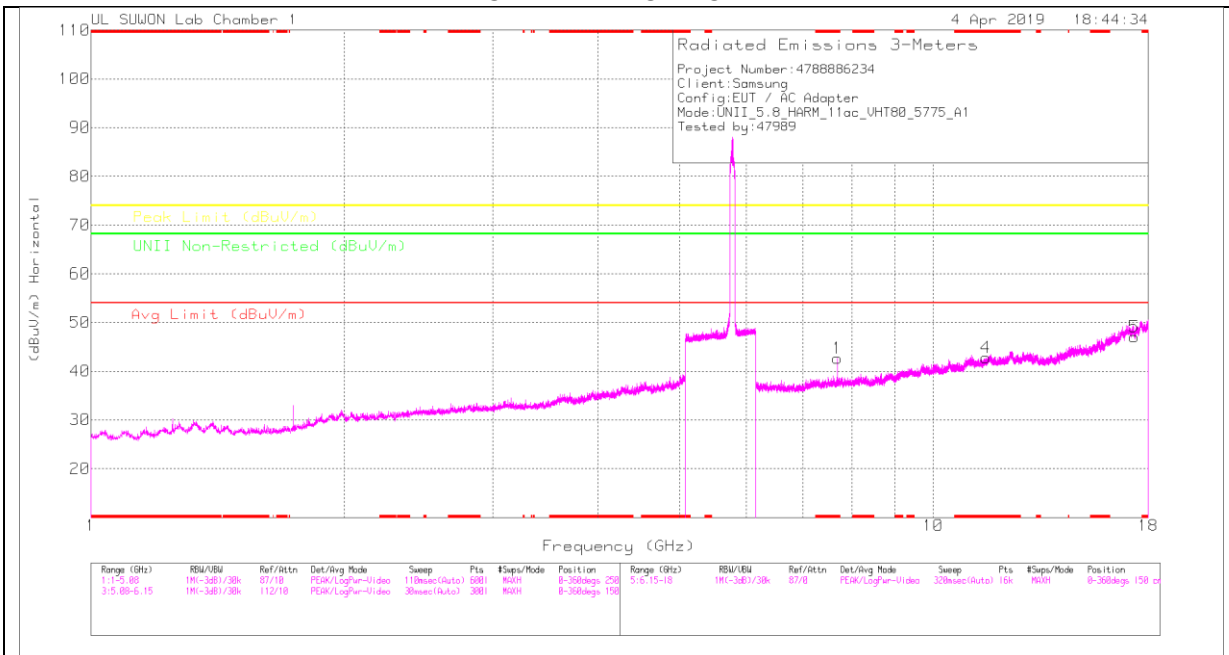

MID CHANNEL VERTICAL

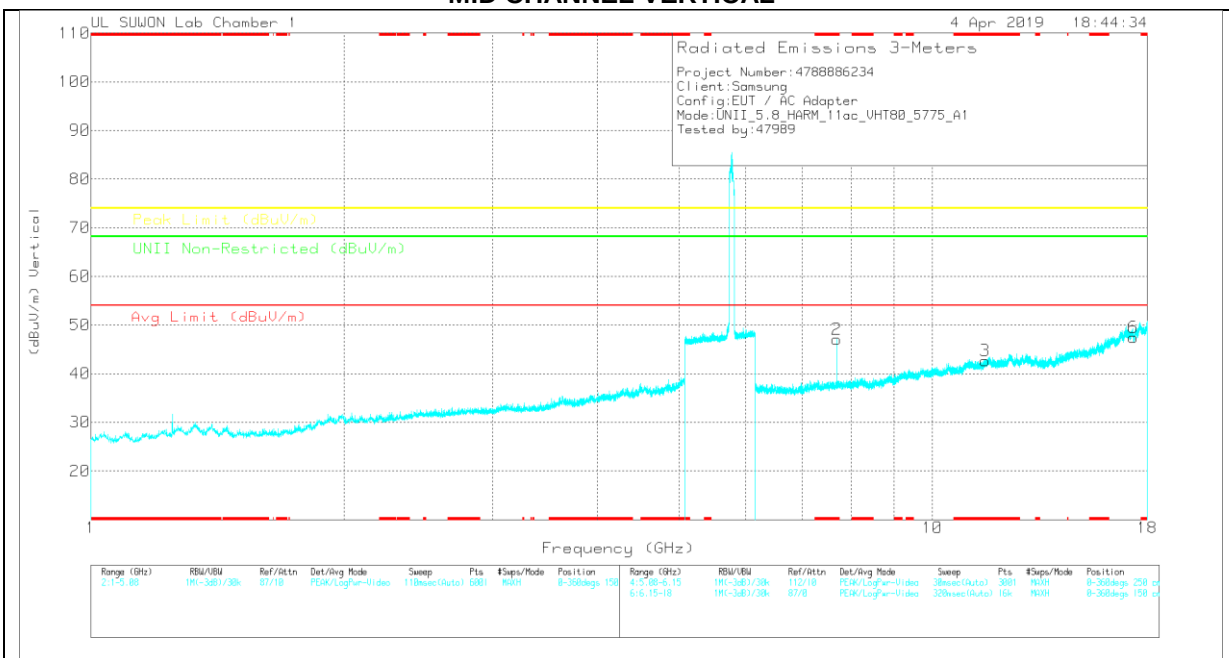

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UHF Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.699	33.56	PK	35.9	-26.8	0	43.66	-	-	74	-31.34	-	-	0-360	150	H
4	* 11.553	26.71	PK	38.6	-22.5	0	43.81	-	-	74	-31.19	-	-	0-360	150	H
5	17.325	23.01	PK	41.2	-17.1	0	47.11	-	-	-	-	68.2	-21.09	0-360	250	H
2	* 7.7	37.92	PK	35.9	-26.8	0	47.02	-	-	74	-26.98	-	-	0-360	150	V
3	* 11.546	26.65	PK	38.5	-22.5	0	42.65	-	-	74	-31.35	-	-	0-360	250	V
6	17.325	23.32	PK	41.2	-17.1	0	47.42	-	-	-	-	68.2	-20.78	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UHF Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.7	41.88	PK-U	35.9	-26.8	0	50.98	-	-	74	-23.02	-	-	79	351	H
* 7.7	34.59	ADR	35.9	-26.8	0	43.69	54	-10.31	-	-	-	-	79	351	H
* 7.7	43.68	PK-U	35.9	-26.8	0	52.78	-	-	74	-21.22	-	-	79	100	V
* 7.7	37.92	ADR	35.9	-26.8	0	47.02	54	-6.98	-	-	-	-	79	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.4.12. TX ABOVE 1GHz 802.11ac VHT80 1Tx ANT2 IN THE 5.8GHz BAND BANDEDGE (Lower side)

HORIZONTAL PEAK PLOT

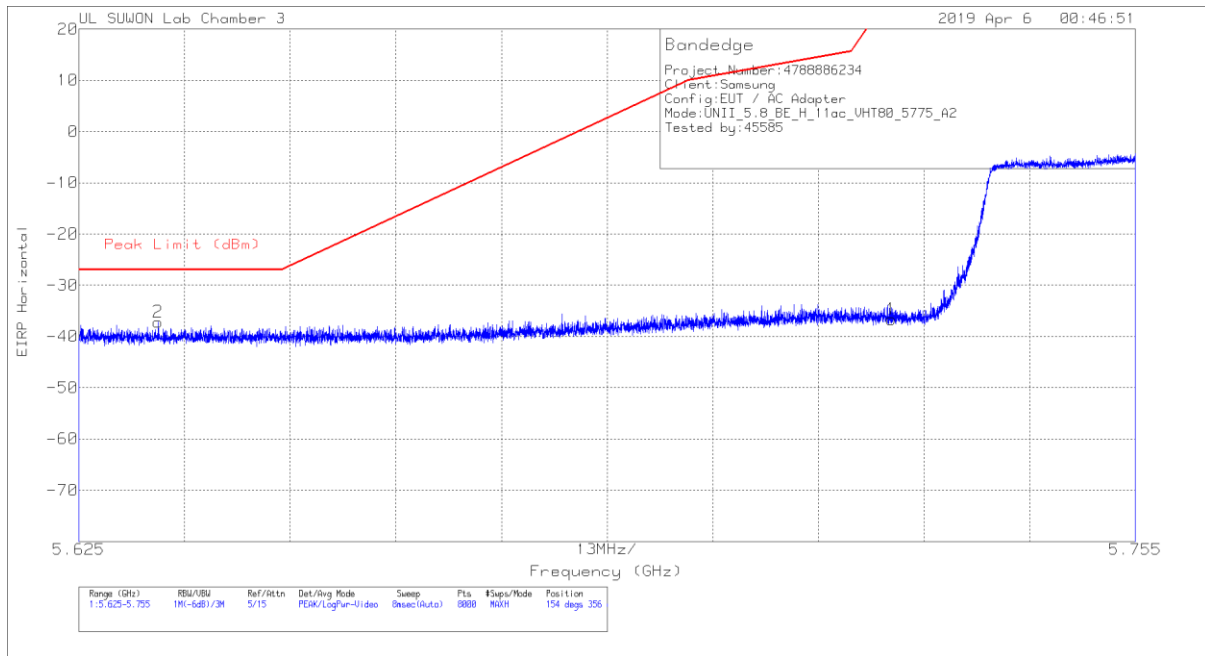


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-65.34	Pk	34.8	-17.9	11.8	0	-36.64	27	-63.64	154	356	H
2	5.635	-65.34	Pk	34.7	-18.3	11.8	0	-37.14	-27	-10.14	154	356	H

Pk - Peak detector

VERTICAL PEAK PLOT

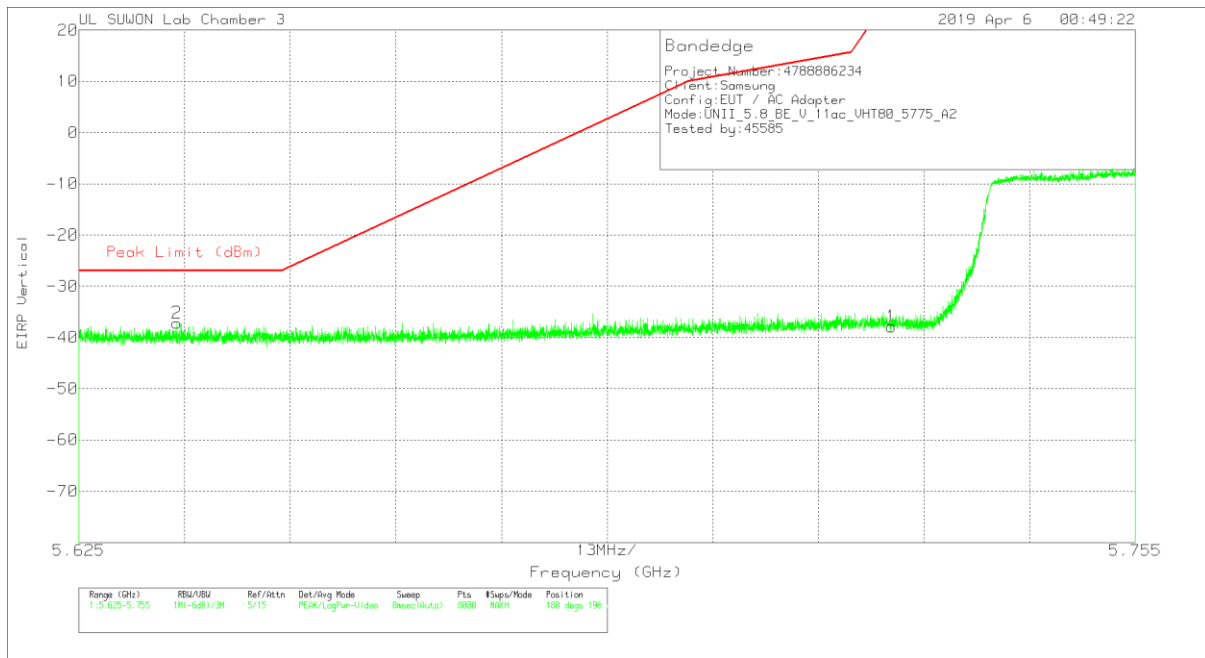


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059_59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-66.57	Pk	34.8	-17.9	11.8	0	-37.87	27	-64.87	180	196	V
2	5.637	-65.44	Pk	34.7	-18.2	11.8	0	-37.14	-27	-10.14	180	196	V

Pk - Peak detector

BANDEDGE (Upper side)

HORIZONTAL PEAK PLOT

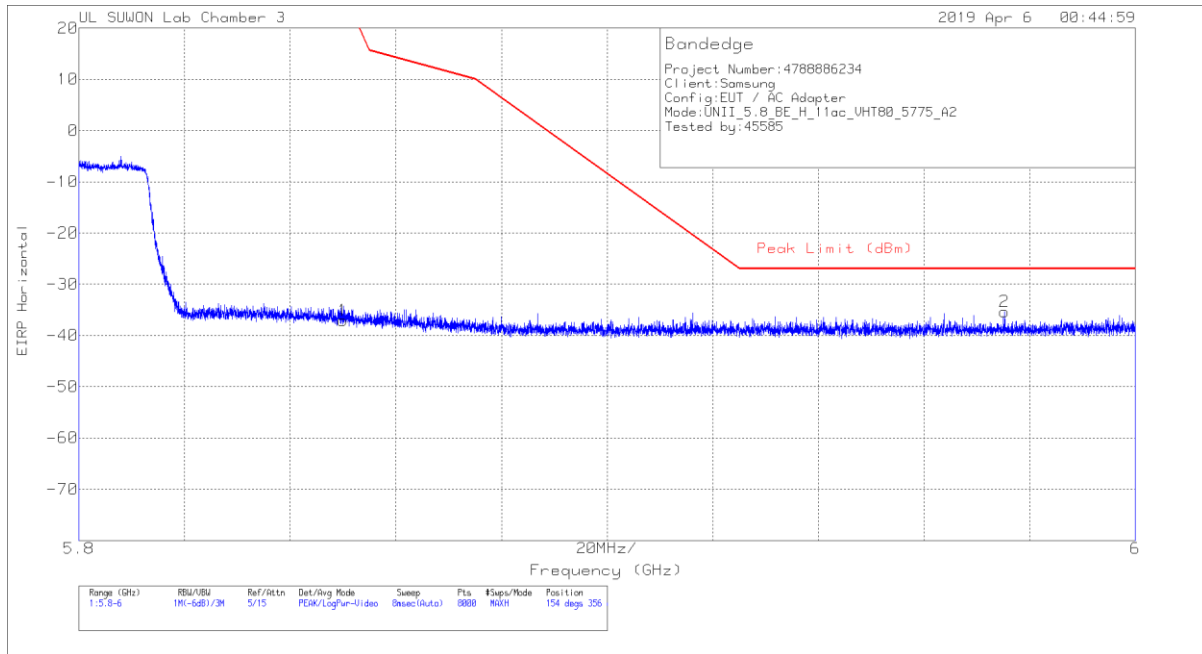


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.22	Pk	35	-17.7	11.8	0	-37.12	26.99	-64.11	154	356	H
2	5.975	-64.62	Pk	35.1	-17.6	11.8	0	-35.32	-27	-8.32	154	356	H

Pk - Peak detector

VERTICAL PEAK PLOT

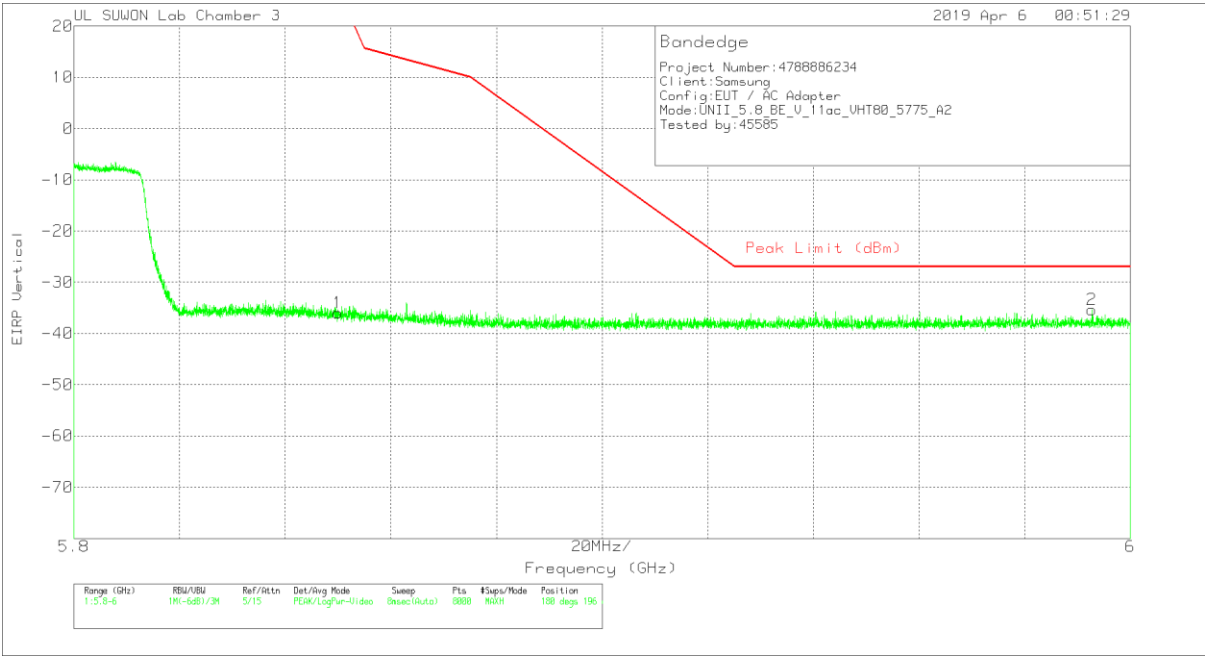


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059_59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.02	Pk	35	-17.7	11.8	0	-35.92	26.99	-62.91	180	196	V
2	5.993	-64.6	Pk	35.1	-17.7	11.8	0	-35.4	-27	-8.4	180	196	V

Pk - Peak detector

MID CHANNEL HORIZONTAL

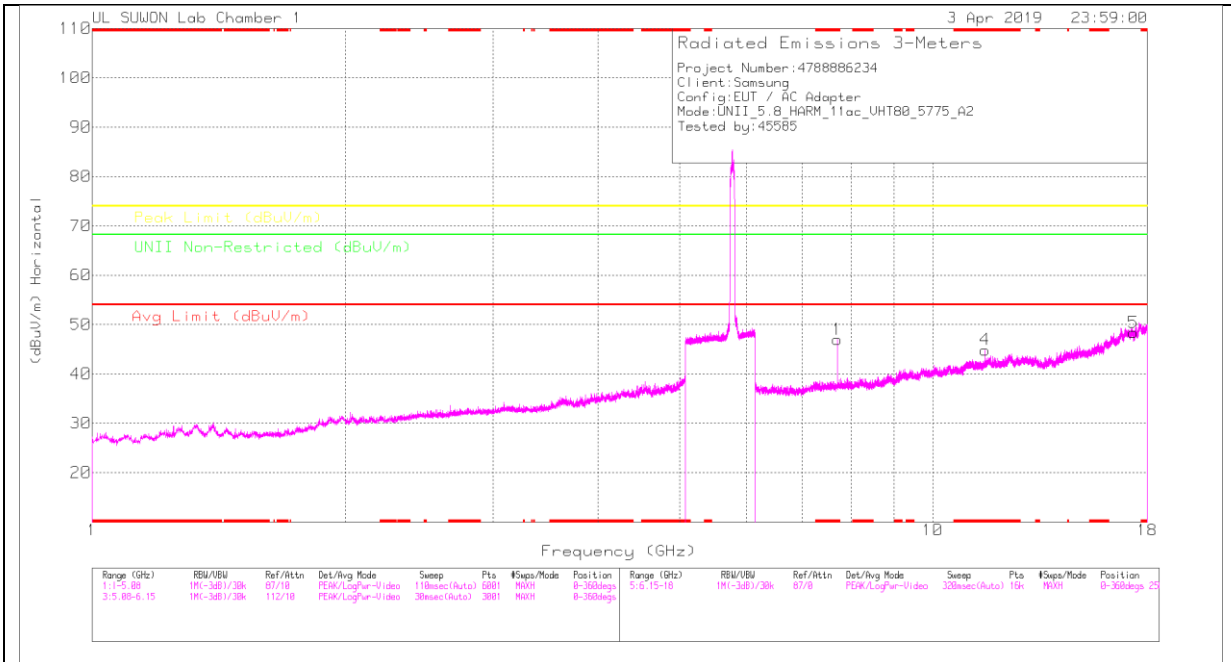

MID CHANNEL VERTICAL

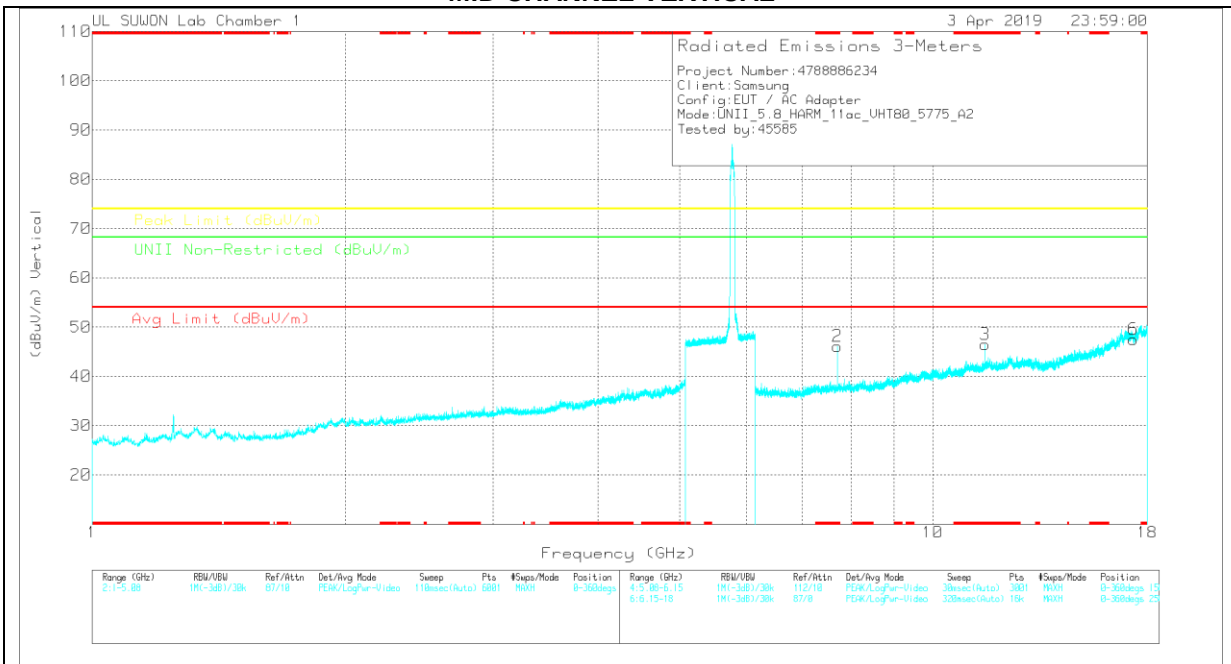

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.699	37.85	PK	35.9	-26.8	0	46.95	-	-	74	-27.05	-	-	0-360	150	H
4	* 11.55	28.88	PK	38.5	-22.5	0	44.88	-	-	74	-29.12	-	-	0-360	150	H
5	17.325	24.17	PK	41.3	-17.1	0	48.37	-	-	-	-	68.2	-19.83	0-360	150	H
2	* 7.699	37.01	PK	35.9	-26.8	0	46.11	-	-	74	-27.89	-	-	0-360	150	V
3	* 11.55	30.49	PK	38.5	-22.5	0	46.49	-	-	74	-27.51	-	-	0-360	150	V
6	17.325	23.34	PK	41.3	-17.1	0	47.54	-	-	-	-	68.2	-20.66	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.7	42.61	PK-U	35.9	-26.8	0	51.71	-	-	74	-22.29	-	-	103	119	H
* 7.7	36.32	ADR	35.9	-26.8	0	45.42	54	-8.58	-	-	-	-	103	119	H
* 7.7	43.18	PK-U	35.9	-26.8	0	52.28	-	-	74	-21.72	-	-	199	395	V
* 7.7	37.32	ADR	35.9	-26.8	0	46.42	54	-7.58	-	-	-	-	199	395	V
* 11.55	38.05	PK-U	38.5	-22.5	0	54.05	-	-	74	-19.95	-	-	191	144	V
* 11.55	28.07	ADR	38.5	-22.5	0	44.07	54	-9.93	-	-	-	-	191	144	V
* 11.55	39.37	PK-U	38.6	-22.5	0	55.47	-	-	74	-18.53	-	-	223	175	H
* 11.55	30.45	ADR	38.5	-22.5	0	46.45	54	-7.55	-	-	-	-	223	175	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

11.5. Spurious Emissions for Simultaneous Transmission

Simultaneous TX Condition

Frequency	Supported
2.4 GHz Antenna 1 + 5 GHz Antenna 2	Yes
2.4 GHz Antenna 2 + 5 GHz Antenna 1	No
2.4 GHz Antenna 1 + 5 GHz Antenna 1	No
2.4 GHz Antenna 2 + 5 GHz Antenna 2	No
2.4 GHz Antenna 1 + 5 GHz MIMO	No
2.4 GHz Antenna 2 + 5 GHz MIMO	No
2.4 GHz MIMO + 5 GHz Antenna 1	No
2.4 GHz MIMO + 5 GHz Antenna 2	No
2.4 GHz MIMO + 5 GHz MIMO	No
2.4 GHz Bluetooth Antenna 1 + 5 GHz Antenna 2	Yes

11.5.1. Worst test case condition

	ANTENNA 1 - 2.4GHz	ANTENNA 2 - 5GHz
Mode	802.11 b mode	802.11 n20 mode
Channel	6	100
Frequency	2437 MHz	5500 MHz
Data Rate	1 Mbps	MCS0

NOTE


Target power of 802.11a and 802.11n HT20 mode in each UNII band are different and therefore, the lowest margin condition among the channels and modes were selected for test. No significant emission detected and emission levels were lower than stand-alone condition.

	ANTENNA 1 - 2.4GHz	ANTENNA 2 - 5GHz
Mode	Bluetooth (GFSK)	802.11 n40 mode
Channel	0	100
Frequency	2402 MHz	5500 MHz
Data Rate	1Mbps	MCS 0


RESULTS

Spurious emission for Simultaneous Transmission

802.11b mode 6 CHANNEL + 802.11n HT20 mode 100 CHANNEL HORIZONTAL

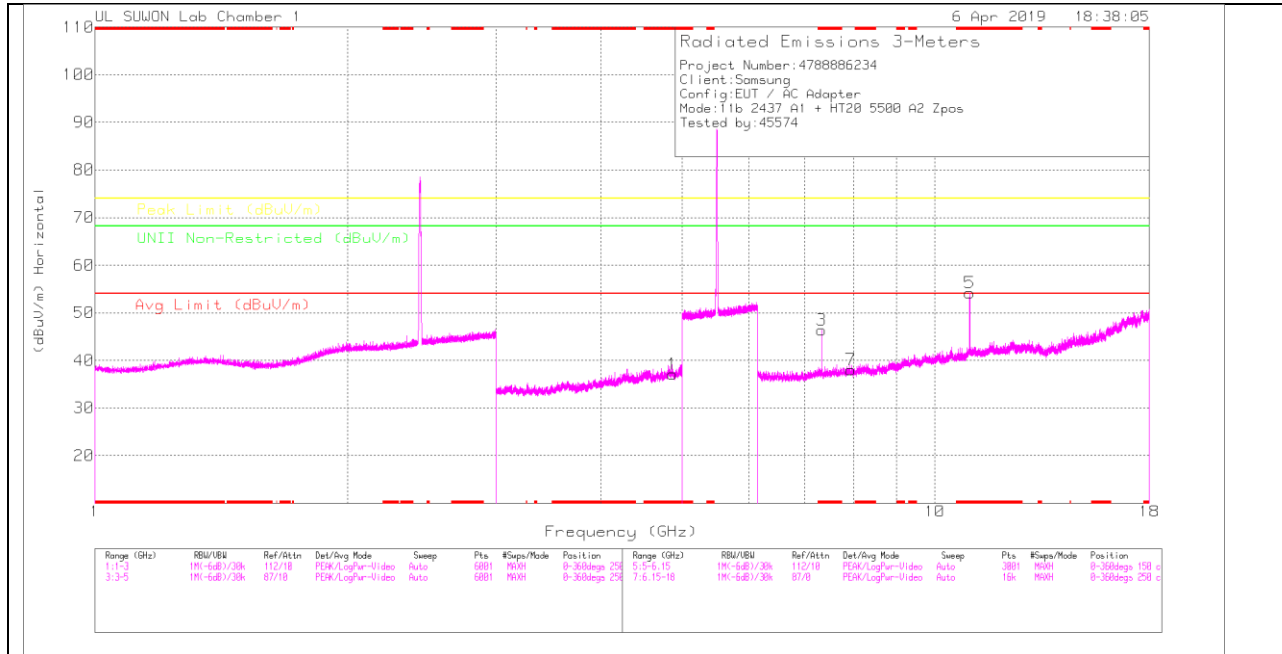

802.11b mode 6 CHANNEL + 802.11n HT20 mode 100 CHANNEL VERTICAL

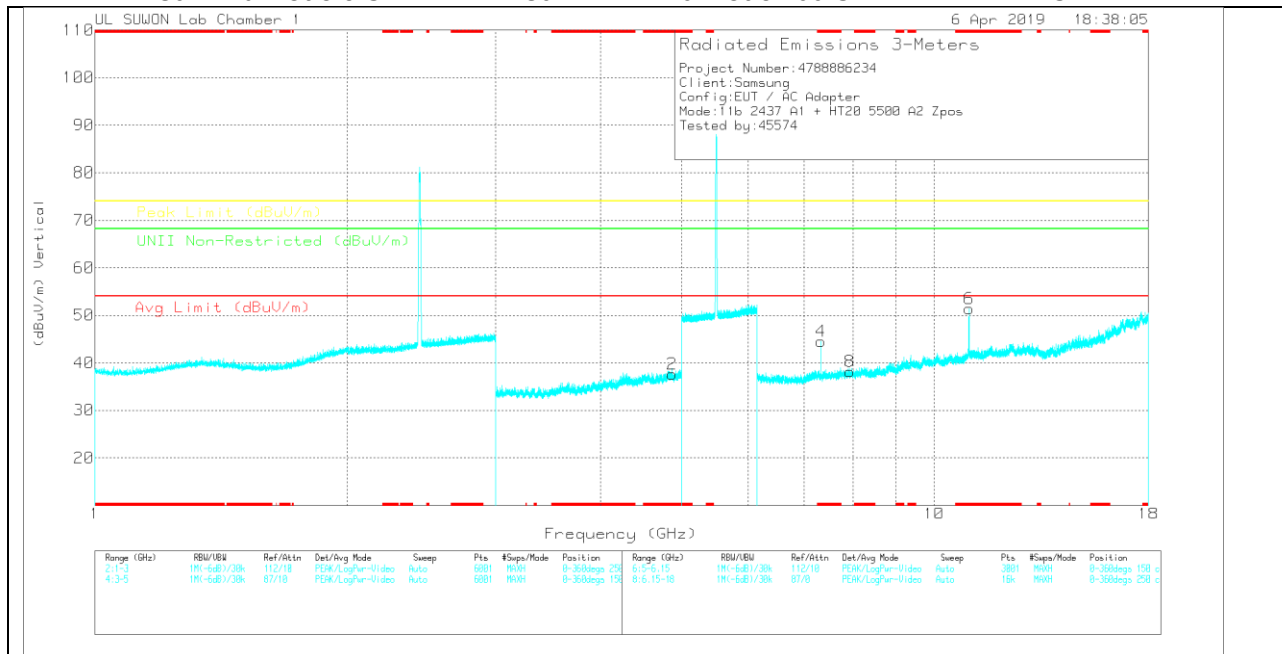

802.11b mode 6 CHANNEL + 802.11n HT20 mode 100 CHANNEL VERTICAL

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
3	* 7.333	37.72	PK	35.8	-27.2	0	46.32	-	-	74	-27.68	-	-	0-360	150	H
5	* 10.998	37.54	PK	38.2	-21.6	0	54.14	-	-	74	-19.86	-	-	0-360	250	H
7	7.941	28.2	PK	36	-26.2	0	38	-	-	-	-	68.2	-30.2	0-360	250	H
4	* 7.333	35.96	PK	35.8	-27.2	0	44.56	-	-	74	-29.44	-	-	0-360	150	V
6	* 11.001	34.8	PK	38.2	-21.6	0	51.4	-	-	74	-22.6	-	-	0-360	250	V
8	7.936	28.48	PK	36	-26.3	0	38.18	-	-	-	-	68.2	-30.02	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
* 7.333	42.84	PK-U	35.8	-27.2	0	51.44	-	-	74	-22.56	-	-	214	145	H
* 7.333	37.69	ADR	35.8	-27.2	0	46.29	54	-7.71	-	-	-	-	214	145	H
* 7.333	42.75	PK-U	35.8	-27.2	0	51.35	-	-	74	-22.65	-	-	185	170	V
* 7.333	37.44	ADR	35.8	-27.2	0	46.04	54	-7.96	-	-	-	-	185	170	V
* 11	42.77	PK-U	38.2	-21.6	0	59.37	-	-	74	-14.63	-	-	214	249	H
* 11	33.37	ADR	38.2	-21.6	0	49.97	54	-4.03	-	-	-	-	214	249	H
* 11.001	40.22	PK-U	38.2	-21.6	0	56.82	-	-	74	-17.18	-	-	195	305	V
* 11	28.81	ADR	38.2	-21.6	0	45.41	54	-8.59	-	-	-	-	195	305	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

Spurious emission for Simultaneous Transmission

BLUETOOTH GFSK 0 CHANNEL + 802.11n HT20 mode 100 CHANNEL HORIZONTAL

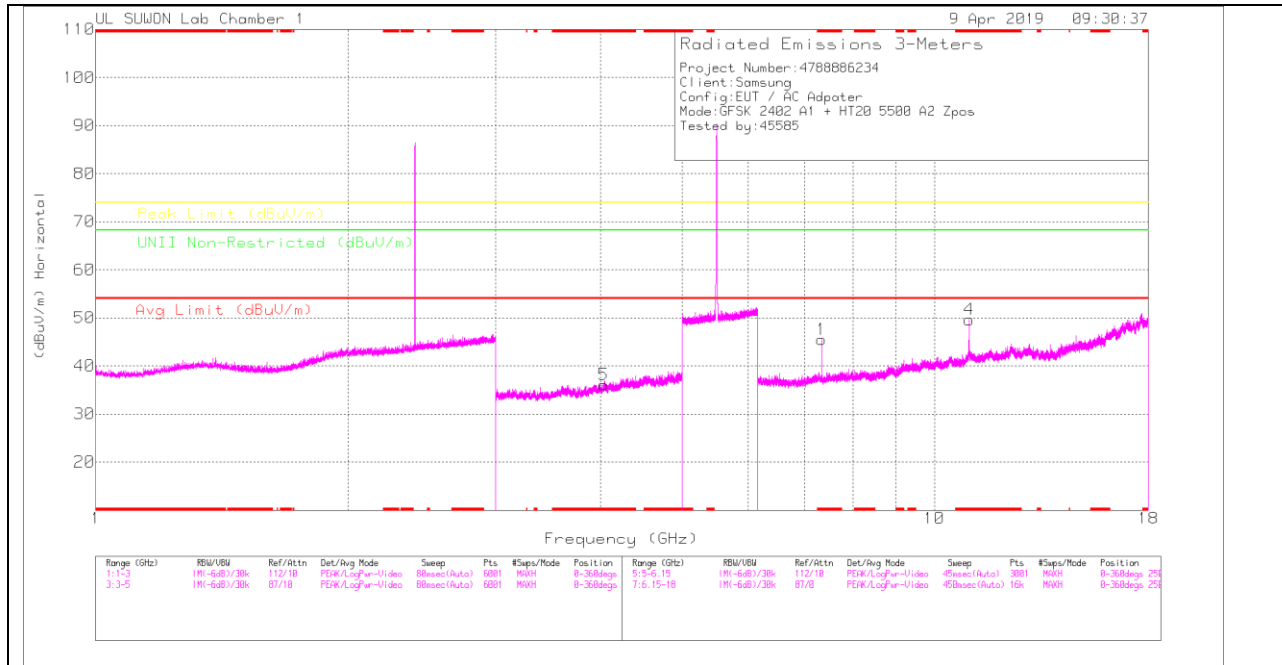

BLUETOOTH GFSK 0 CHANNEL + 802.11n HT20 mode 100 CHANNEL VERTICAL

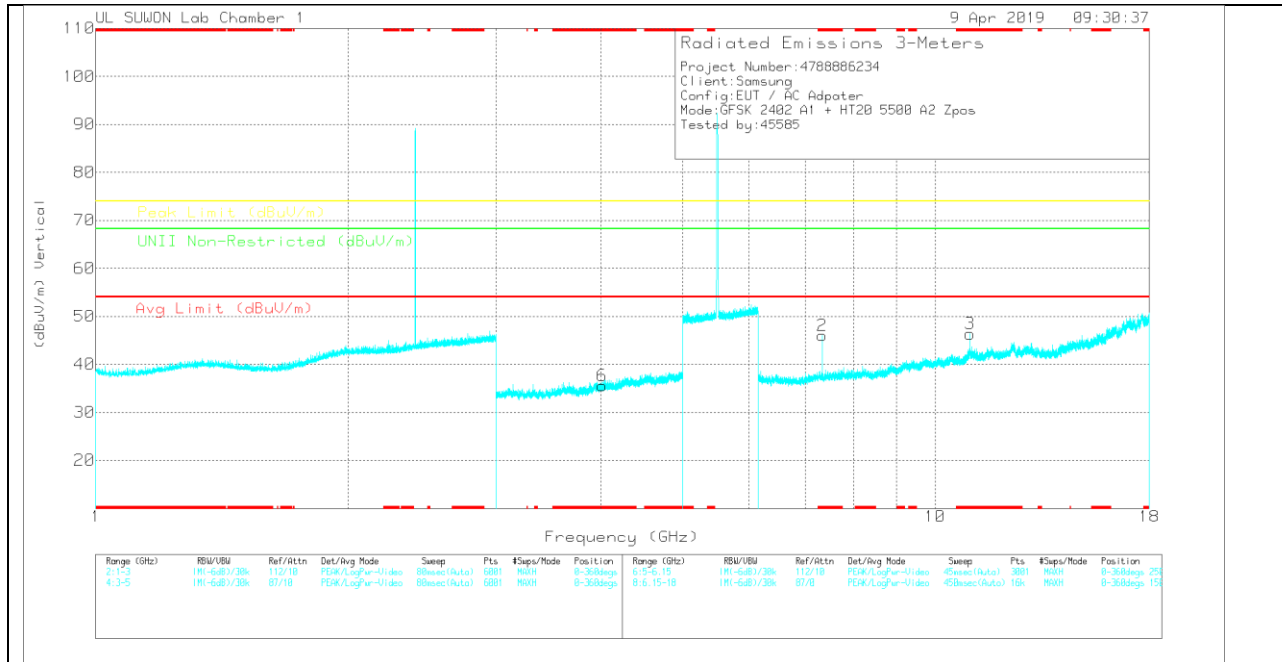

BLUETOOTH GFSK 0 CHANNEL + 802.11n HT20 mode 100 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	5GHz_HIP(dB)	D15_Noise	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 4.032	33.5	PK	33.6	-31.4	.4	0	36.1	-	-	74	-37.9	-	-	0-360	250	H
6	* 4.014	32.94	PK	33.6	-31.4	.4	0	35.54	-	-	74	-38.46	-	-	0-360	250	V

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	5GHz_HIP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.333	36.9	PK	35.8	-27.2	0	45.5	-	-	74	-28.5	-	-	0-360	150	H
4	* 11	33.03	PK	38.2	-21.6	0	49.63	-	-	74	-24.37	-	-	0-360	250	H
2	* 7.333	37.38	PK	35.8	-27.2	0	45.98	-	-	74	-28.02	-	-	0-360	150	V
3	* 11.002	29.76	PK	38.2	-21.6	0	46.36	-	-	74	-27.64	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	5GHz_HIP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.333	43.08	PK-U	35.8	-27.2	0	51.68	-	-	74	-22.32	-	-	245	179	H
* 7.333	38.07	ADR	35.8	-27.2	0	46.67	54	-7.33	-	-	-	-	245	179	H
* 7.333	43.02	PK-U	35.8	-27.2	0	51.62	-	-	74	-22.38	-	-	197	178	V
* 7.333	37.69	ADR	35.8	-27.2	0	46.29	54	-7.71	-	-	-	-	197	178	V
* 11	39.83	PK-U	38.2	-21.6	0	56.43	-	-	74	-17.57	-	-	208	282	V
* 11	28.81	ADR	38.2	-21.6	0	45.41	54	-8.59	-	-	-	-	208	282	V
* 11	41.91	PK-U	38.2	-21.6	0	58.51	-	-	74	-15.49	-	-	118	357	H
* 11	32.26	ADR	38.2	-21.6	0	48.86	54	-5.14	-	-	-	-	118	357	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

12. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

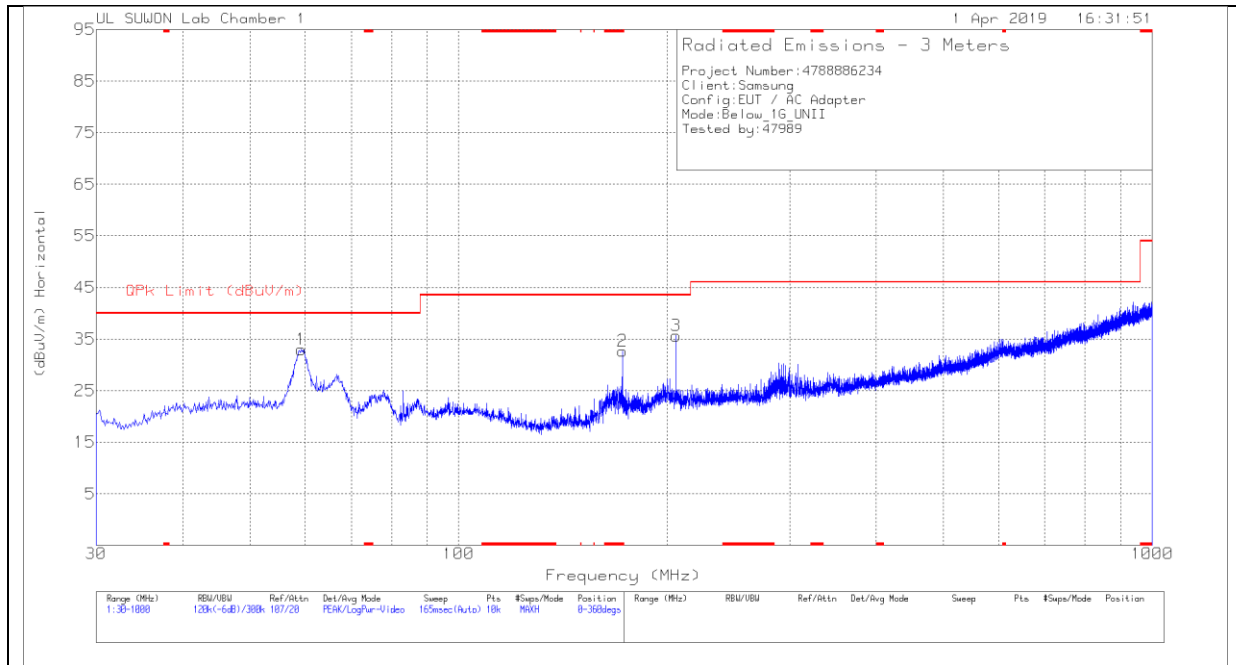

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

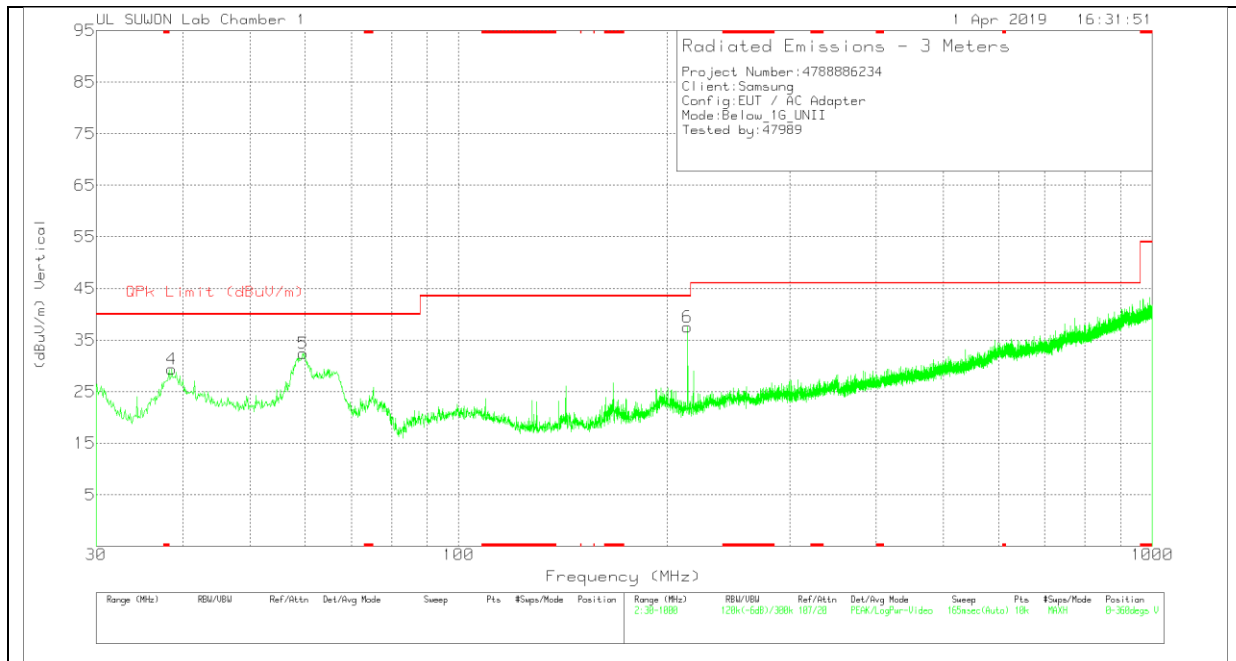

Below 1G Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	59.294	44.58	Pk	18.7	-30.3	0	32.98	40	-7.02	0-360	400	H
2	* 172.202	46.57	Pk	14.9	-28.8	0	32.67	43.52	-10.85	0-360	100	H
3	205.667	47.15	Pk	17	-28.5	0	35.65	43.52	-7.87	0-360	100	H
4	38.536	41.97	Pk	18.1	-30.7	0	29.37	40	-10.63	0-360	100	V
5	59.682	44.11	Pk	18.6	-30.3	0	32.41	40	-7.59	0-360	100	V
6	213.815	48.81	Pk	17.1	-28.4	0	37.51	43.52	-6.01	0-360	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

13. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
IC RSS-GEN Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

LINE 2 PLOT

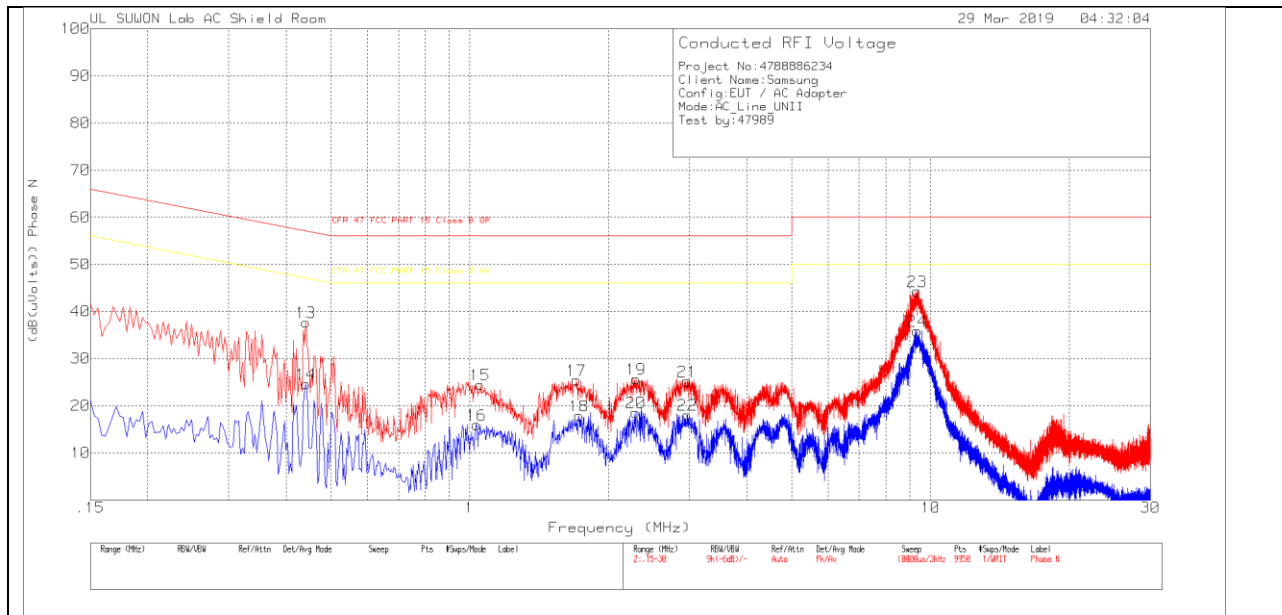

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_10183 6_With ex-cord_N	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.441	28.08	Pk	9.4	.2	37.68	57.04	-19.36	-	-
14	.441	15.04	Av	9.4	.2	24.64	-	-	47.04	-22.4
15	1.053	14.38	Pk	9.8	.3	24.48	56	-31.52	-	-
16	1.035	5.86	Av	9.8	.3	15.96	-	-	46	-30.04
17	1.704	15.46	Pk	9.7	.3	25.46	56	-30.54	-	-
18	1.725	7.89	Av	9.7	.3	17.89	-	-	46	-28.11
19	2.295	15.65	Pk	9.7	.3	25.65	56	-30.35	-	-
20	2.292	8.62	Av	9.7	.3	18.62	-	-	46	-27.38
21	2.964	15.19	Pk	9.7	.3	25.19	56	-30.81	-	-
22	2.964	8.04	Av	9.7	.3	18.04	-	-	46	-27.96
23	9.348	33.89	Pk	10	.4	44.29	60	-15.71	-	-
24	9.357	25.49	Av	10	.4	35.89	-	-	50	-14.11

Pk - Peak detector

Av - Average detection

14. DYNAMIC FREQUENCY SELECTION

14.1. OVERVIEW

14.1.1. LIMITS

FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.		

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see notes)
E.I.R.P. $\geq$ 200 mill watt	-64 dBm
E.I.R.P. < 200 mill watt and power spectral density < 10 dBm/MHz	-62 dBm
E.I.R.P. < 200 mill watt that do not meet power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds (See Note 1)
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. (See Note 3)
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests.					

Table 6 – Long Pulse Radar Test Signal


Radar Waveform Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

14.1.1. TEST AND MEASUREMENT SYSTEM

CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

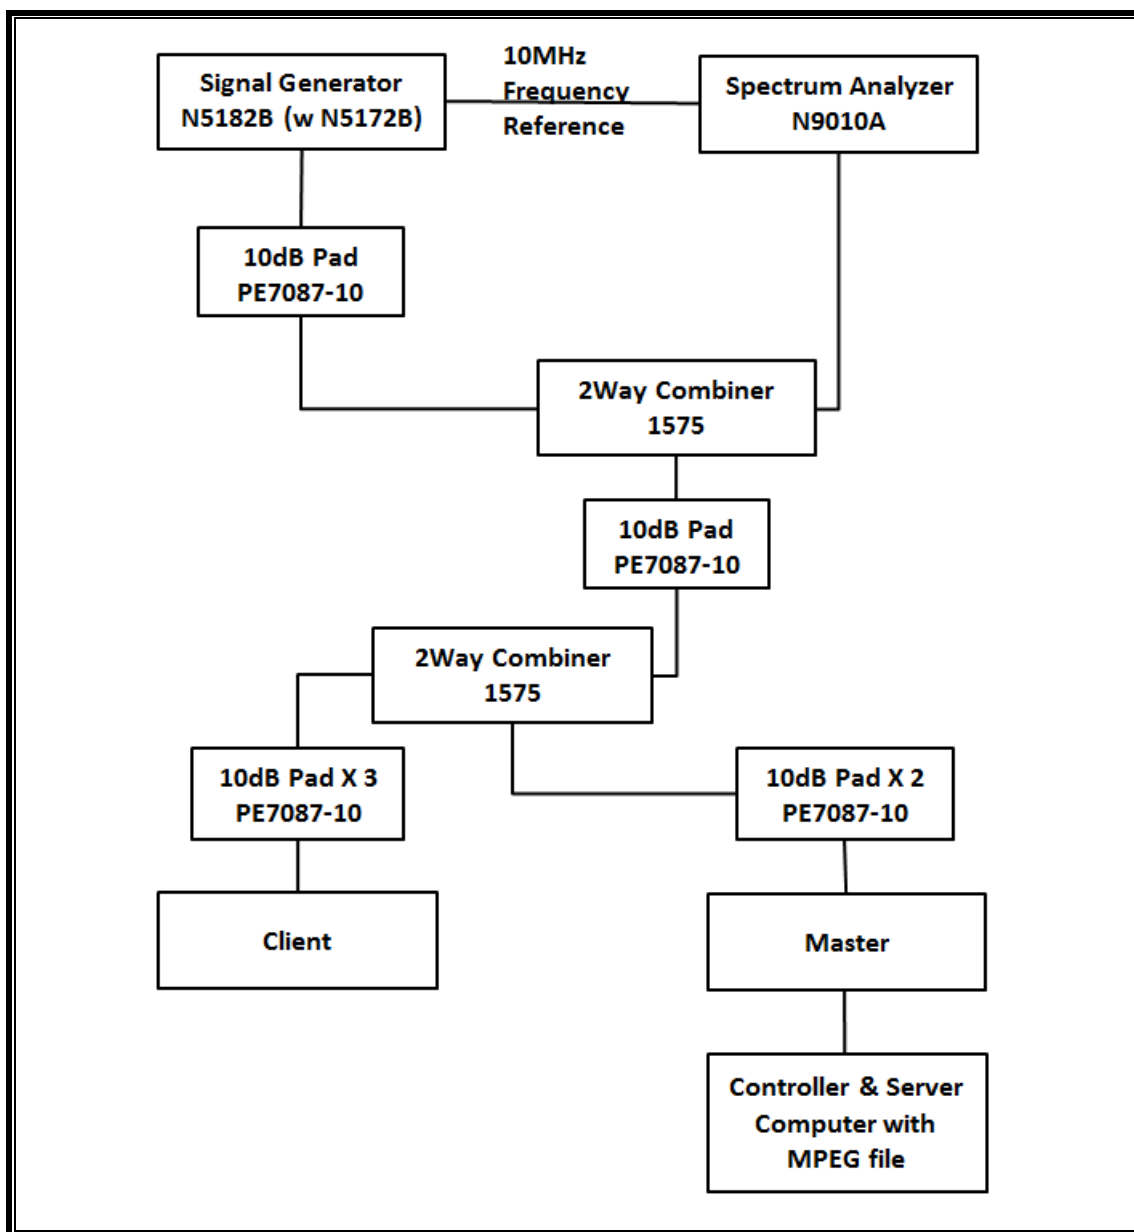

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the Keysite Signal Studio for Pulse Building as N5172B. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	Next Cal Due
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	08-07-19
Vector Signal Generator, 6GHz	Agilent / HP	N5182B	MY53051241	08-07-19

14.1.2. SETUP OF EUT

CONDUCTED METHOD EUT TEST SETUP

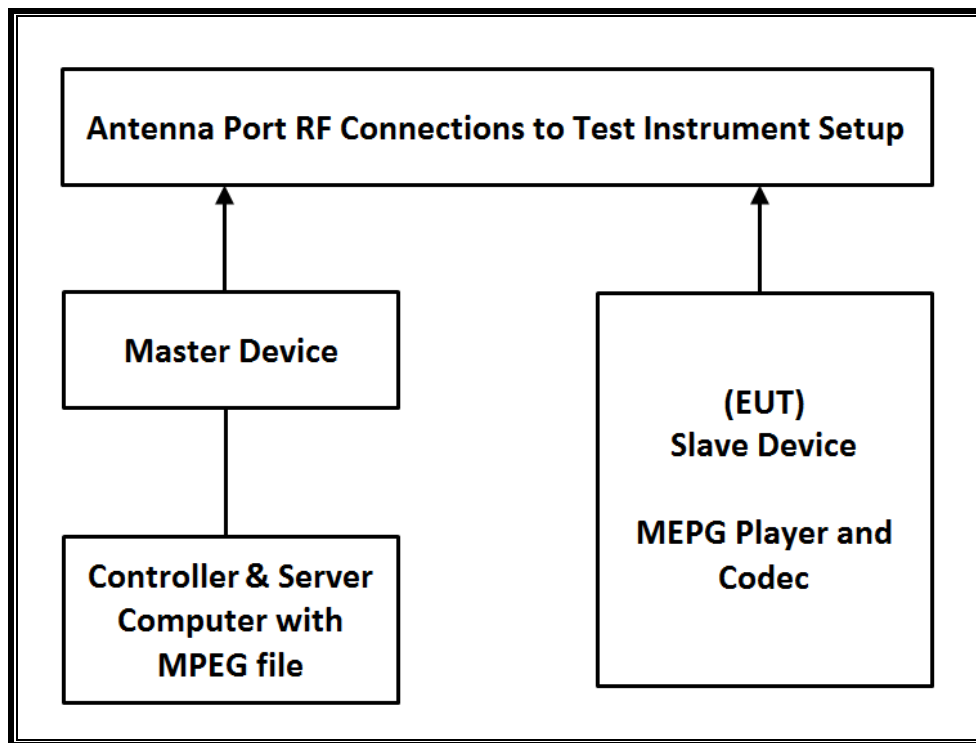

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point	Cisco	AIR-CAP3702E-A-K9	FTX182276QX	LDK102087
Notebook PC (Controller/Server)	HP	HP EliteDesk 800 G1 TWR	CZC4125J25	DoC

14.1.3. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 16.03 dBm in the 5250-5350 MHz band and 15.77 dBm in the 5470-5725 MHz band.

The antenna assembly utilized two antenna.

Gain of antenna 1 : -1.87 dBi for UNII 2A and -2.80 dBi for UNII 2C.

Gain of antenna 2 : -1.71 dBi for UNII 2A and -2.98 dBi for UNII 2C.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required conducted threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the controller/server PC to the EUT using iPerf version 2.0.5 software package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the access point is 12.4(25d)JA1.

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102087. The minimum antenna gain for the Master Device is 6 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.


14.2. RESULTS FOR 20 MHz BANDWIDTH

14.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

14.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

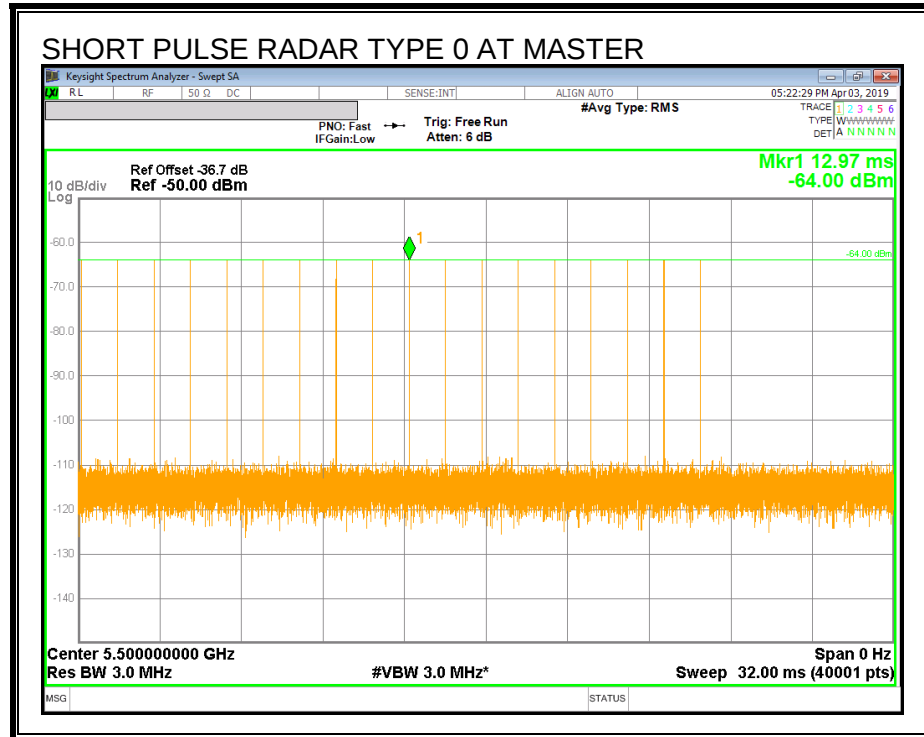

TRAFFIC

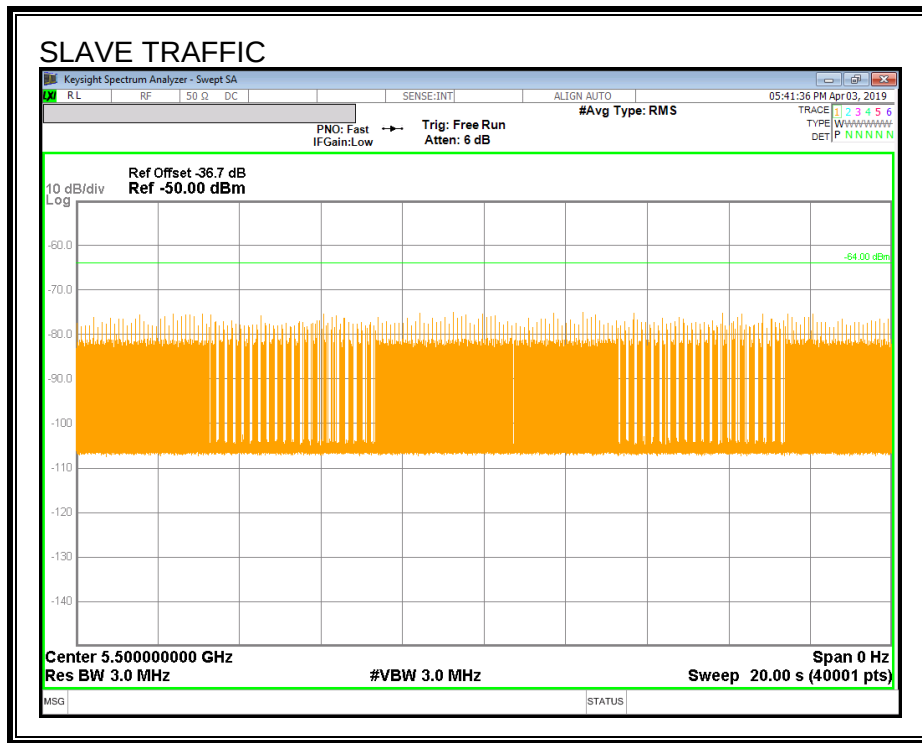

14.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.711	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
3.375	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

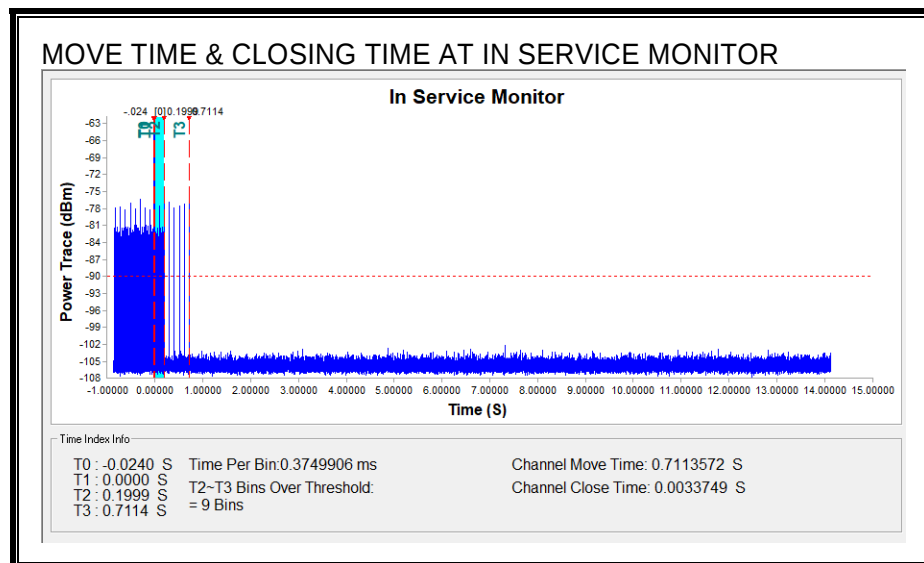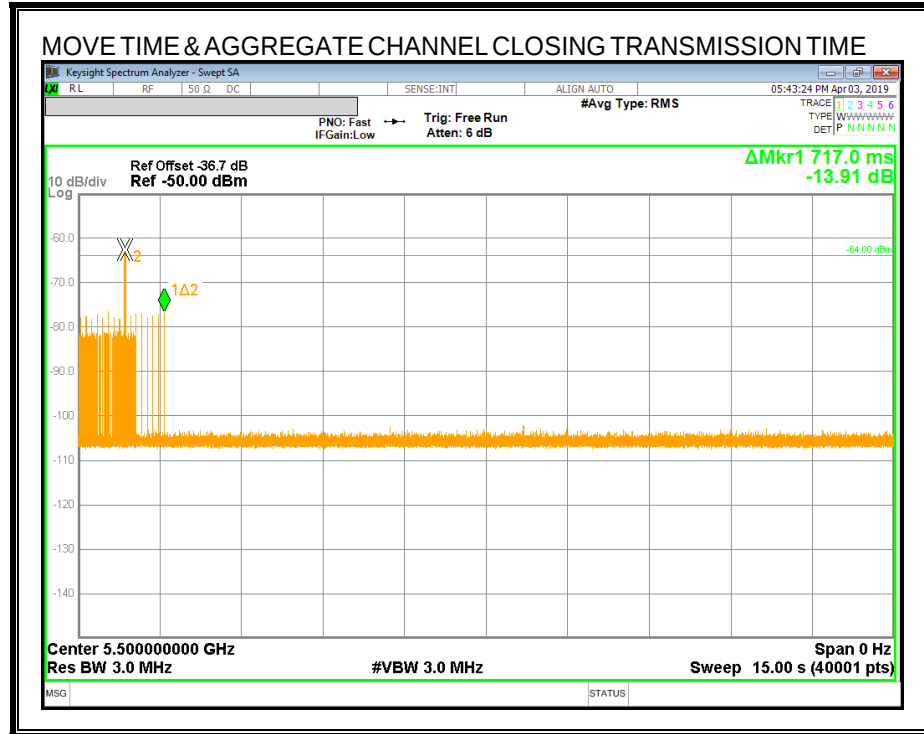

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

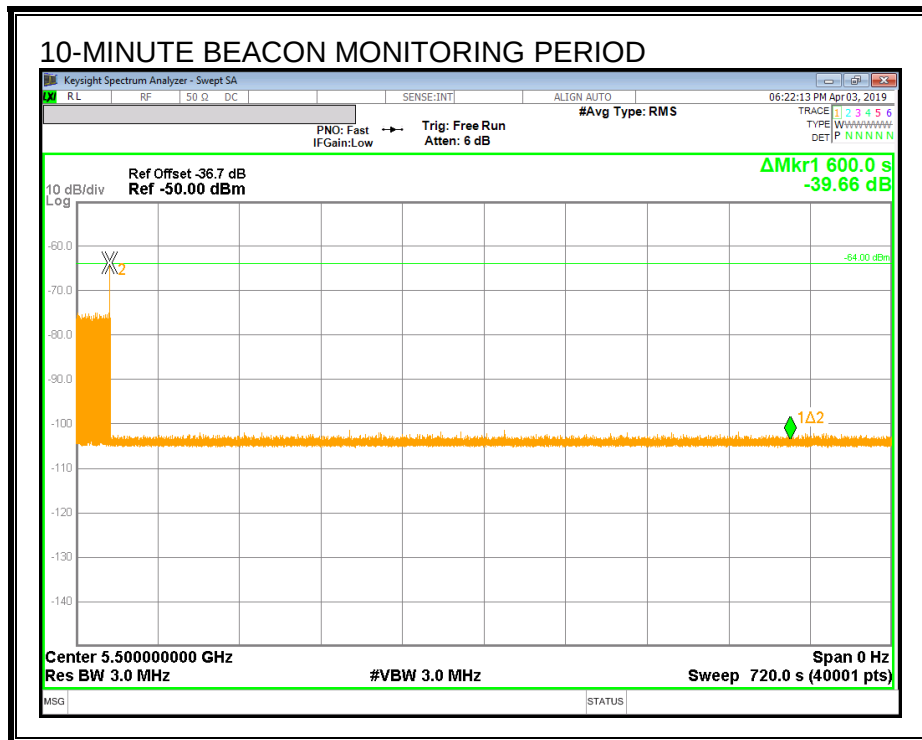


14.3. RESULTS FOR 40 MHz BANDWIDTH

14.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

14.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

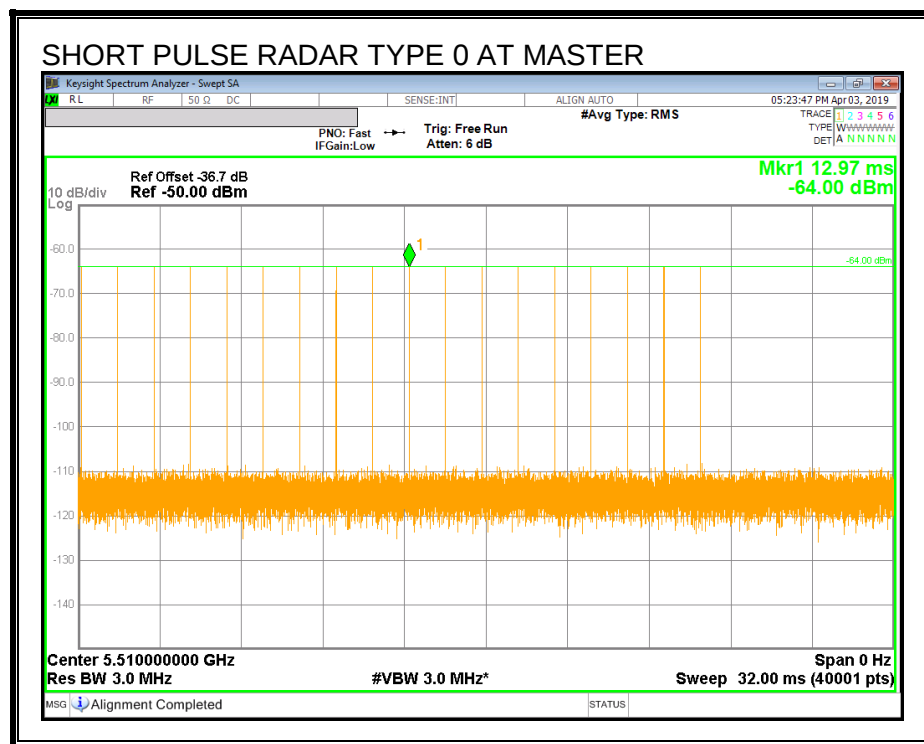

TRAFFIC

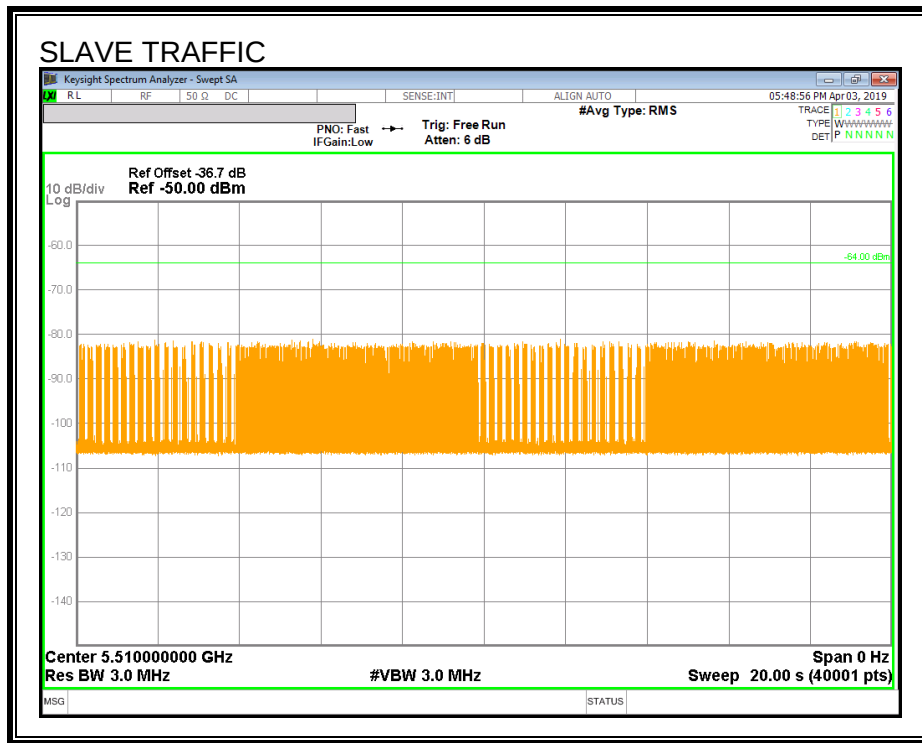

14.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.795	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
4.500	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

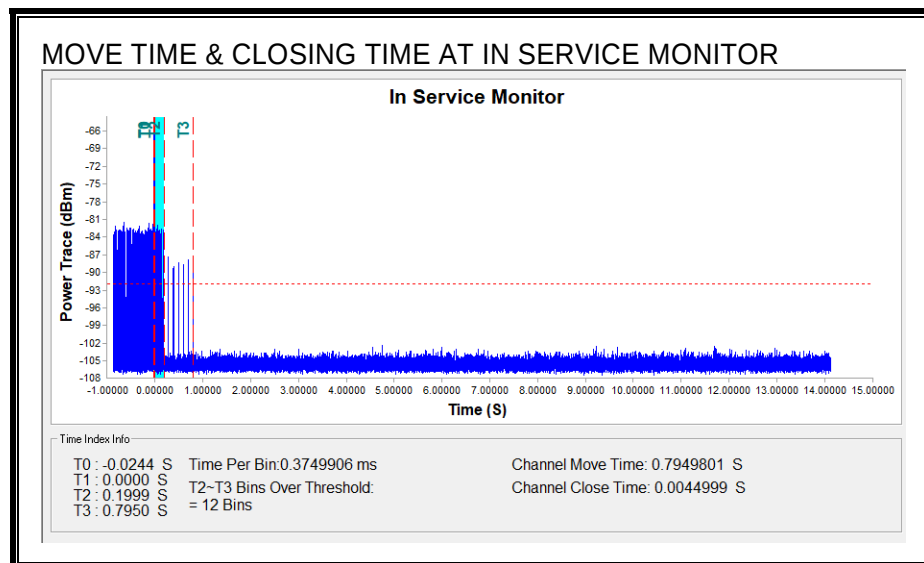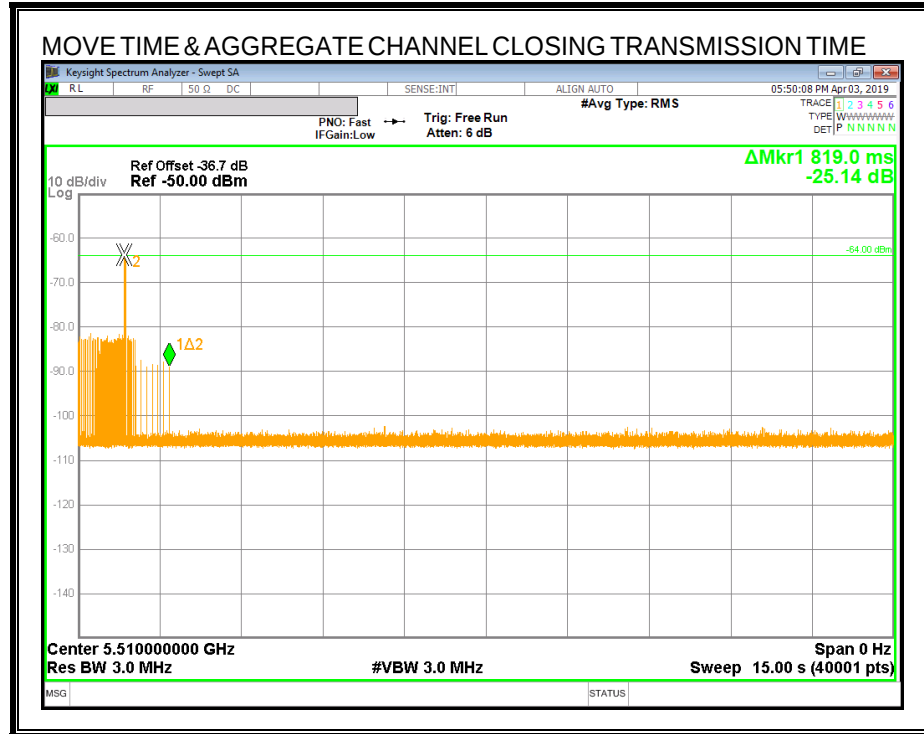

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

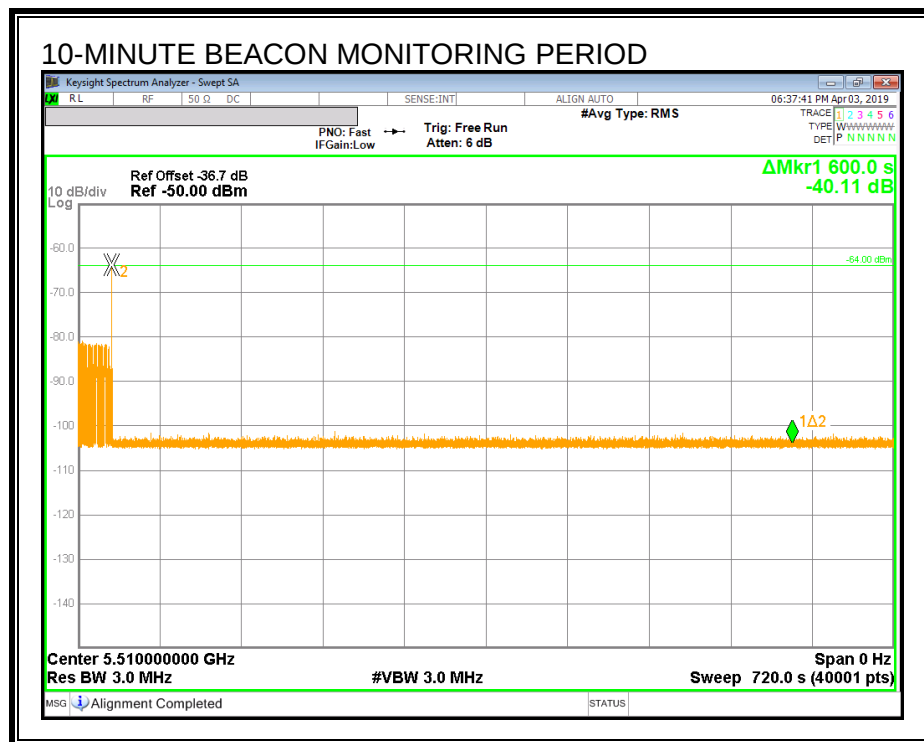


14.4. RESULTS FOR 80 MHz BANDWIDTH

14.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

14.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

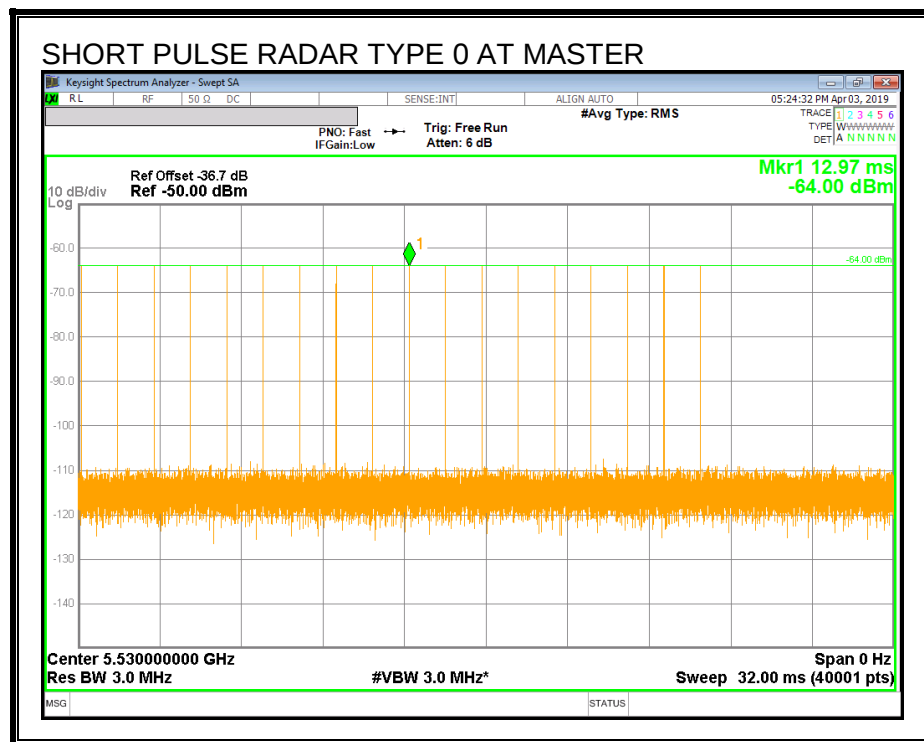

TRAFFIC

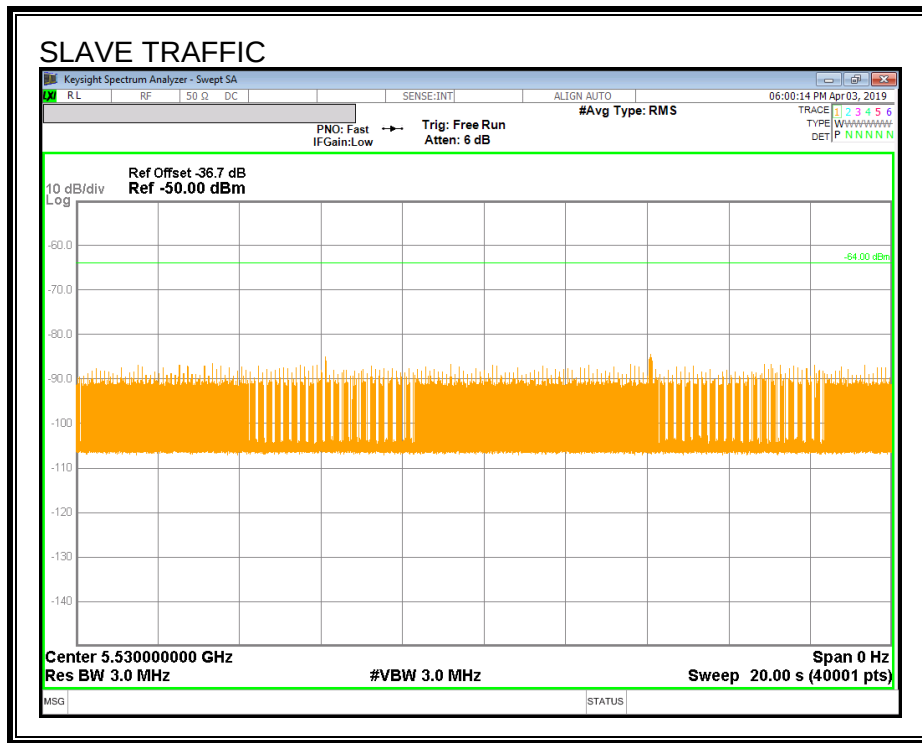

14.4.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.4.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.711	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
3.750	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

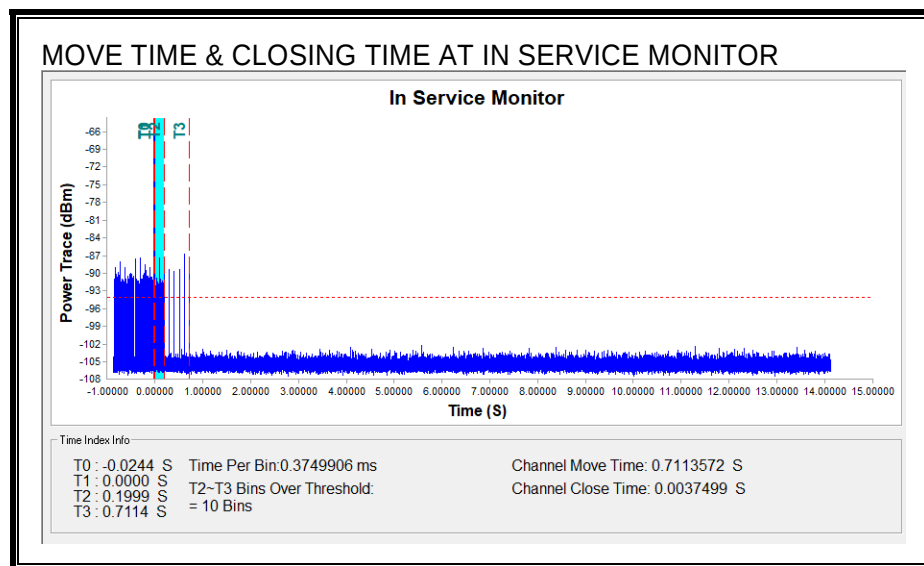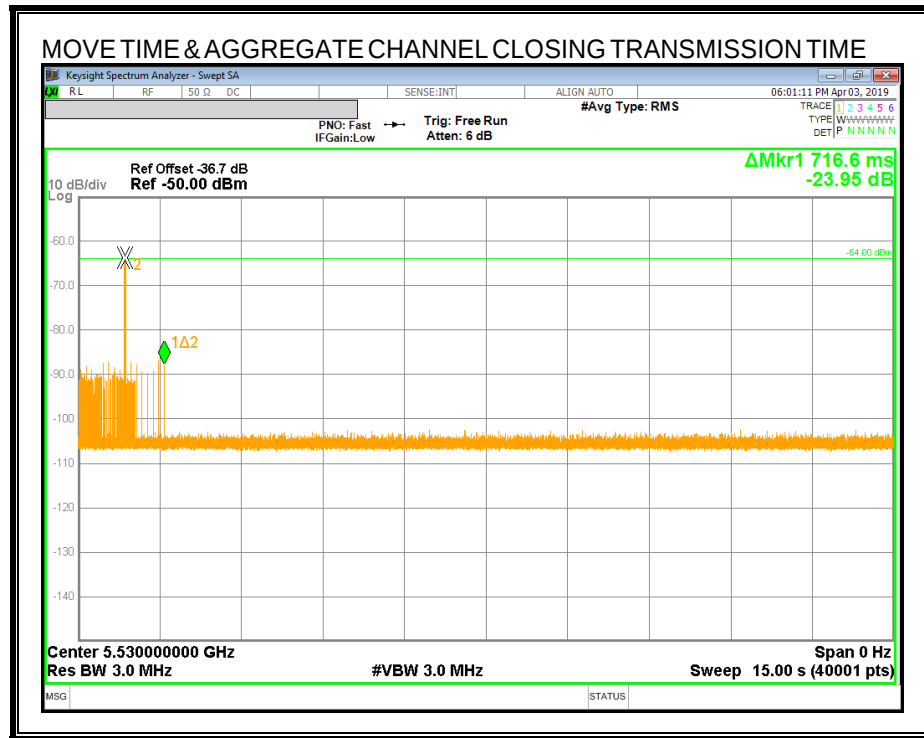

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

