



FCC 47 CFR PART 15 SUBPART E

UNII

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n

MODEL NUMBER : SM-C710F/DS

FCC ID: A3LSMC710F

REPORT NUMBER: 4788060266-E4V1

ISSUE DATE: AUG 01, 2017

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/01/17	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. SUMMARY TABLE	14
8. REFERENCE MEASUREMENTS RESULTS	15
8.1. ON TIME AND DUTY CYCLE RESULTS.....	15
8.2. DUTY CYCLE PLOTS	15
8.3. 26 dB BANDWIDTH.....	17
8.3.1. 802.11a MODE IN THE 5.2 GHz BAND	18
8.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	18
8.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	18
8.3.4. 802.11a MODE IN THE 5.3 GHz BAND	19
8.3.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND	19
8.3.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND	19
8.3.7. 802.11a MODE IN THE 5.5 GHz BAND.....	20
8.3.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND	20
8.3.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND	20
8.3.10. 802.11a MODE IN THE 5.8 GHz BAND	21
8.3.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND	21
8.3.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND	21
8.3.13. 26 dB BANDWIDTH PLOTS	22
9. ANTENNA PORT TEST RESULTS	34
9.1. 6 dB BANDWIDTH.....	34

9.1.1.	802.11a MODE IN THE 5.8 GHz BAND	35
9.1.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	35
9.1.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	35
9.1.4.	6 dB BANDWIDTH PLOTS	36
9.2.	OUTPUT POWER AND PPSD.....	39
9.2.1.	802.11a MODE IN THE 5.2 GHz BAND	40
9.2.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	41
9.2.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	42
9.2.4.	802.11a MODE IN THE 5.3 GHz BAND	43
9.2.5.	802.11n HT20 MODE IN THE 5.3 GHz BAND	44
9.2.6.	802.11n HT40 MODE IN THE 5.3 GHz BAND	45
9.2.7.	802.11a MODE IN THE 5.5 GHz BAND	46
9.2.8.	802.11n HT20 MODE IN THE 5.5 GHz BAND	47
9.2.9.	802.11n HT40 MODE IN THE 5.5 GHz BAND	48
9.2.10.	802.11a MODE IN THE 5.8 GHz BAND	49
9.2.11.	802.11n HT20 MODE IN THE 5.8 GHz BAND	50
9.2.12.	802.11n HT40 MODE IN THE 5.8 GHz BAND	51
9.2.13.	802.11a MODE AT STRADDLE CHANNEL	52
9.2.14.	802.11n HT20 MODE AT STRADDLE CHANNEL	53
9.2.15.	802.11n HT40 MODE AT STRADDLE CHANNEL	54
9.2.16.	OUTPUT POWER AND PPSD PLOTS	55
10.	TRANSMITTER ABOVE 1 GHz.....	67
10.1.	5.2 GHz	69
10.1.1.	TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND	69
10.1.2.	TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND	77
10.1.3.	TX Above 1GHz 802.11n HT40 MODE IN THE 5.2GHz BAND	85
10.2.	5.3 GHz	91
10.2.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	91
10.2.2.	TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.3GHz BAND	99
10.2.3.	TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.3GHz BAND	107
10.3.	5.5-5.6 GHz	113
10.3.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND	113
10.3.2.	TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND	125
10.3.3.	TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND	137
10.4.	5.8 GHz	149
10.4.1.	TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND	149
10.4.2.	TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND	159
10.4.3.	TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.8GHz BAND	169
11.	WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band).....	177
12.	AC POWER LINE CONDUCTED EMISSIONS	179
13.	DYNAMIC FREQUENCY SELECTION.....	184
13.1.	OVERVIEW.....	184
13.1.1.	LIMITS.....	184
13.1.1.	TEST AND MEASUREMENT SYSTEM	188

13.1.2. SETUP OF EUT	191
13.1.3. DESCRIPTION OF EUT	192
13.1. RESULTS FOR 20 MHz BANDWIDTH.....	193
13.1.1. TEST CHANNEL	193
13.1.2. RADAR WAVEFORM AND TRAFFIC.....	193
13.1.3. OVERLAPPING CHANNEL TESTS.....	195
13.1.4. MOVE AND CLOSING TIME	195
13.2. RESULTS FOR 40 MHz BANDWIDTH.....	198
13.2.1. TEST CHANNEL	198
13.2.2. RADAR WAVEFORM AND TRAFFIC.....	198
13.2.3. OVERLAPPING CHANNEL TESTS.....	200
13.2.4. MOVE AND CLOSING TIME	200
14. SETUP PHOTOS.....	203

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n

MODEL NUMBER: SM-C710F/DS

SERIAL NUMBER: R38J50E3XNE, 420042efacff44fb (RADIATED);
R38J50E4JCW (CONDUCTED)

DATE TESTED: JUL 17, 2017 - JUL 29, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v01r03
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☒ Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n.
This test report addresses the NII (UNII) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5180 - 5240	802.11a	14.347	27.21
	802.11n HT20	14.314	27.00
5190 - 5230	802.11n HT40	11.469	14.02
5260 - 5320	802.11a	14.305	26.95
	802.11n HT20	14.314	27.00
5270 - 5310	802.11n HT40	11.435	13.92
5500 - 5720	802.11a	13.937	24.76
	802.11n HT20	14.141	25.95
5510 - 5710	802.11n HT40	11.299	13.49
5745 - 5825	802.11a	13.627	23.05
	802.11n HT20	13.757	23.75
5755 - 5795	802.11n HT40	11.075	12.81

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of:

Frequency Range [MHz]	Antenna Gain [dBi]
UNII 1 5150 – 5250	-8.3
UNII 2A 5250 – 5350	-7.7
UNII 2C 5470 – 5725	-6.8
UNII 3 5725 – 5850	-7.0

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50EWE	DK5J311VS/A -E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.6m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS

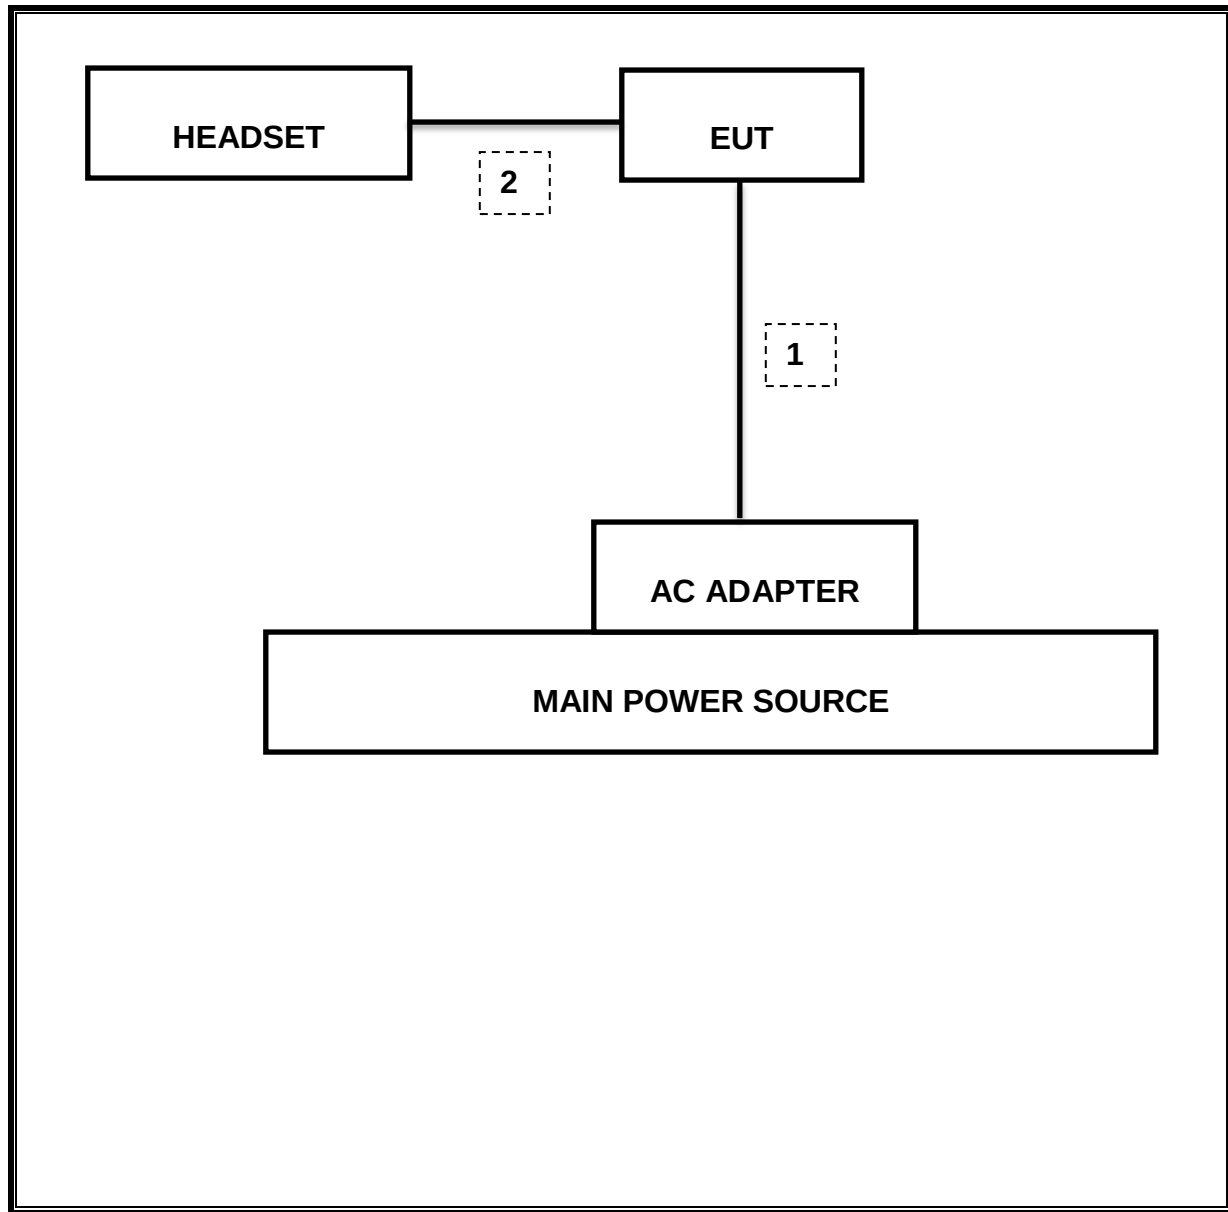

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	10-14-18
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-14-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-17-17
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-16-17
Preamplifier	ETS	3115-PA	00167475	08-17-17
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-16-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-17-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	03-09-18
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	11-25-17
Average Power Sensor	R&S	NRP-Z91	102681	08-16-17
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-16-17
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-16-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-17-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-16-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-17-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-16-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-17-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-16-17
LISN	R&S	ENV-216	101837	08-16-17
Attenuator	PASTERNAK	PE7087-10	A009	08-16-17
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8Ghz)	500KHz		2.535 MHz (Straddle Ch.)
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		14.347 dBm
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		13.627 dBm
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		4.578 dBm
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		0.761 dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	45.95 dBuV (Pk)
15.407 (b) & 15.209	Radiated Spurious Emission	< 68.2dBuV/m		65.12 dBuV/m (Pk)
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	Pass

8. REFERENCE MEASUREMENTS RESULTS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 D02 v01r03 Zero-Span Spectrum Analyzer Method.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11a	1.392	1.500	0.928	92.8%	0.32	0.718
802.11n HT20	1.300	1.408	0.923	92.3%	0.35	0.769
802.11n HT40	0.648	0.755	0.858	85.8%	0.67	1.544

8.2. DUTY CYCLE PLOTS

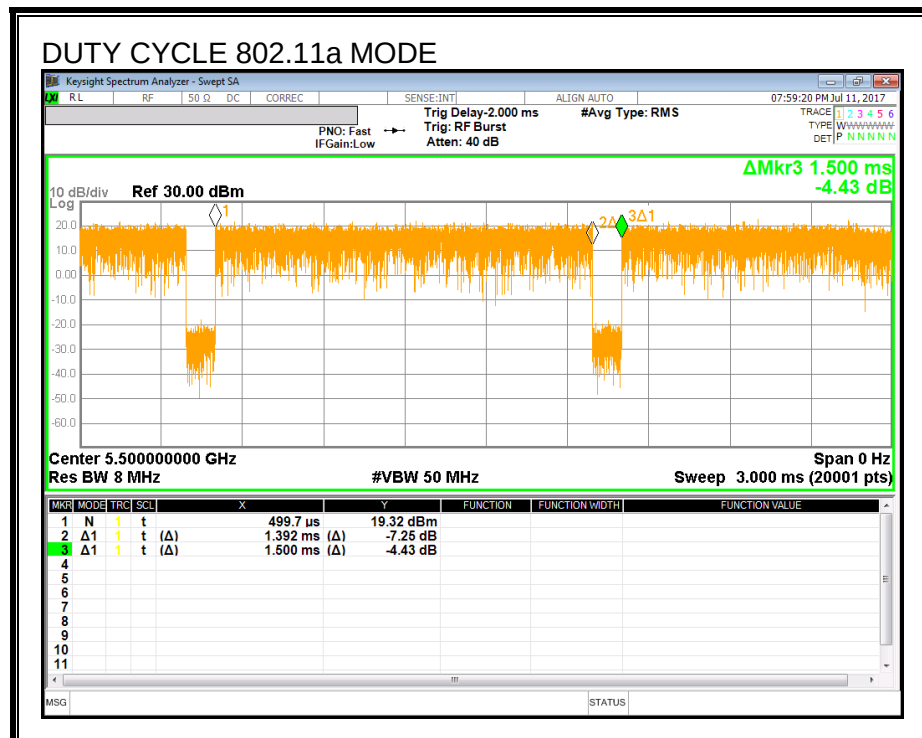

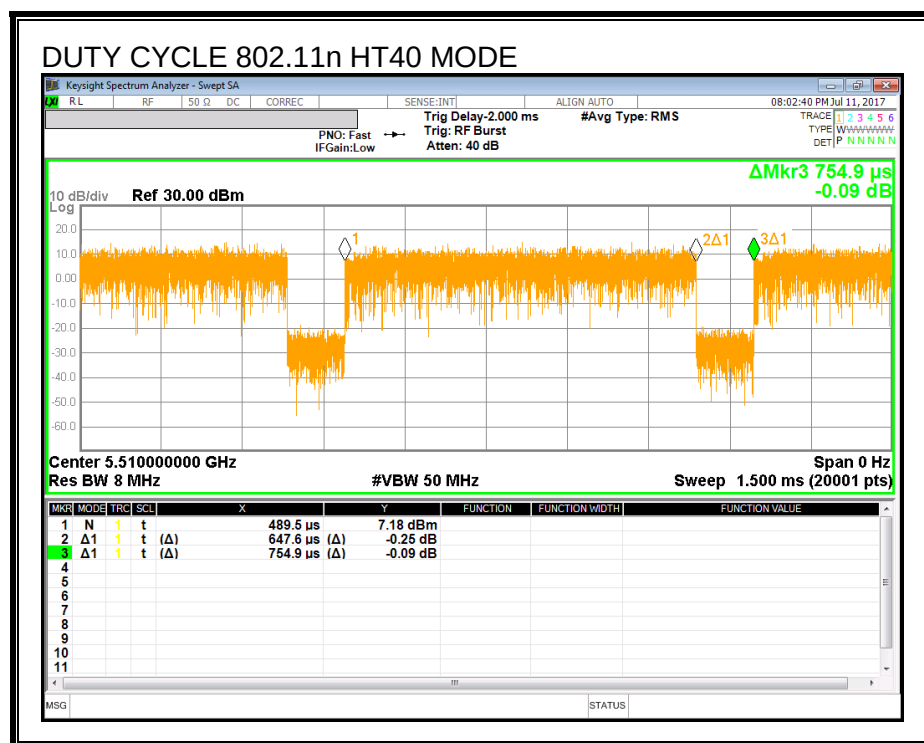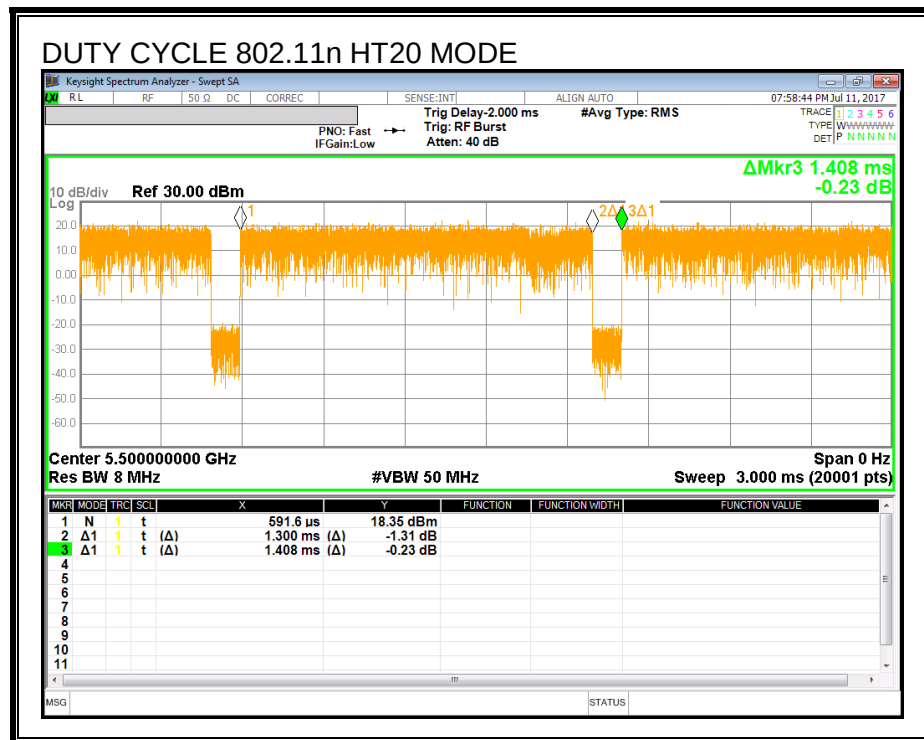

8.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01r03: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 26dB Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 26dB BW : 21.00MHz
- Turning Frequency : 5725MHz
- 26dB Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 + (21.00 / 2))) = 15.50 \text{ MHz}$
- 26dB Bandwidth of UNII-3 band Portion
 $= (5720 + (21.00 / 2) - 5725) = 5.50 \text{ MHz}$

RESULTS

8.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	19.33
Mid	5200	19.47
High	5240	19.39
Worst		19.47

8.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	19.75
Mid	5200	19.93
High	5240	19.66
Worst		19.93

8.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5190	39.76
High	5230	40.01
Worst		40.01

8.3.4. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	19.23
Mid	5300	19.29
High	5320	19.35
Worst		19.35

8.3.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	19.67
Mid	5300	19.75
High	5320	19.77
Worst		19.77

8.3.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5270	39.74
High	5310	39.68
Worst		39.74

8.3.7. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	19.52
Mid	5580	19.53
High	5700	20.12
Straddle	5720	14.77
Worst		20.12

8.3.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	19.62
Mid	5580	20.08
High	5700	19.92
Straddle	5720	14.96
Worst		20.08

8.3.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5510	39.62
Mid	5590	39.63
High	5670	39.62
Straddle	5710	34.86
Worst		39.63

8.3.10. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	4.77
Low	5745	19.55
Mid	5785	19.50
High	5825	19.45
Worst		19.55

8.3.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	4.96
Low	5745	19.61
Mid	5785	19.58
High	5825	19.38
Worst		19.61


8.3.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5710	4.86
Low	5755	39.85
High	5795	39.39
Worst		39.85


8.3.13. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

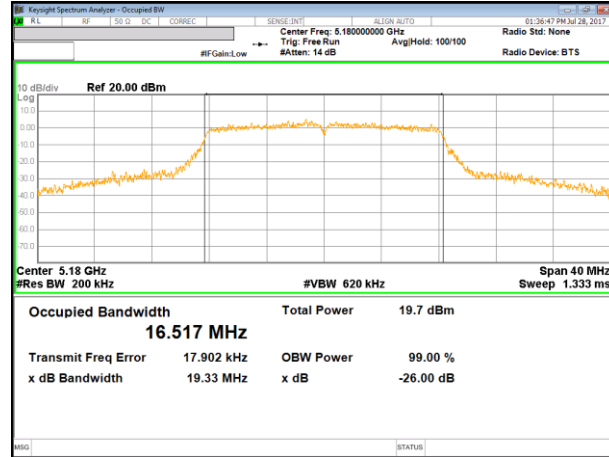

11a Mode Middle Channel

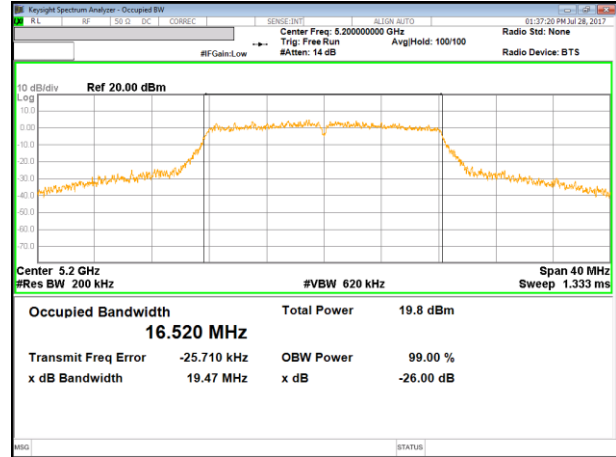


11a Mode High Channel

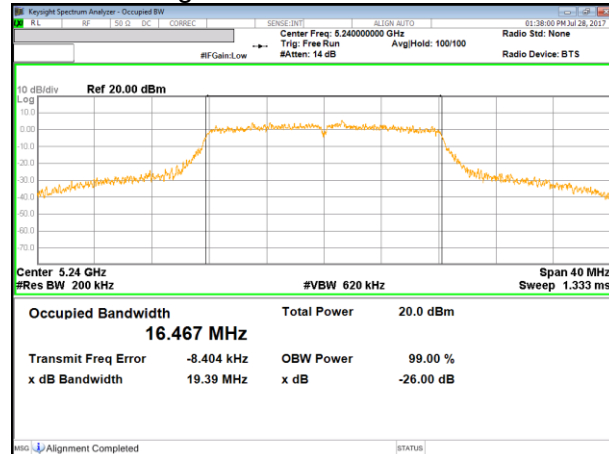


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

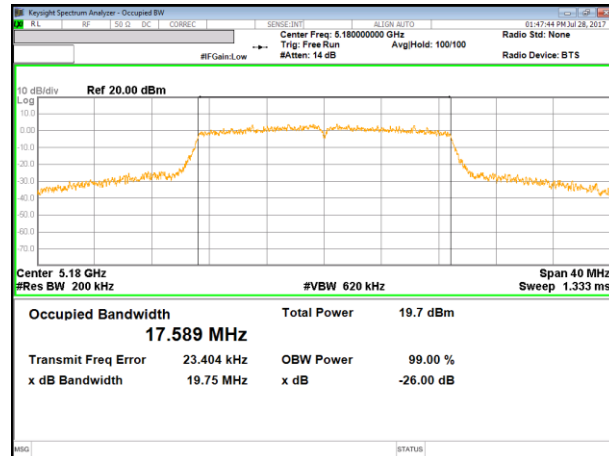


11n HT20 Mode Middle Channel

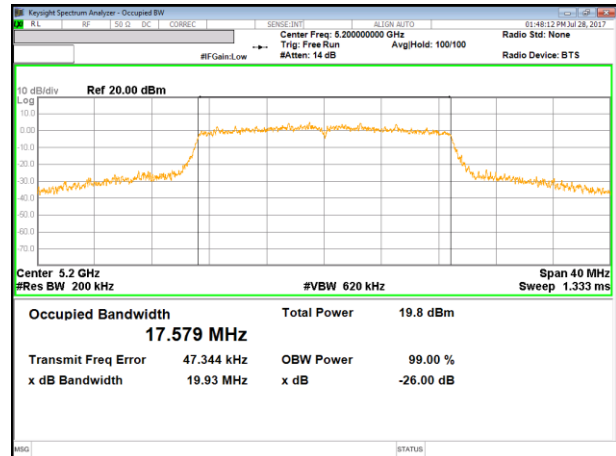

11n HT20 Mode High Channel

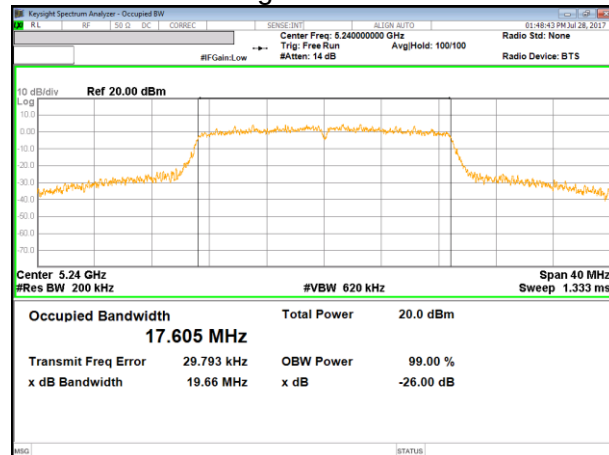


UNII 5.2 GHz IEEE 802.11n HT40 mode

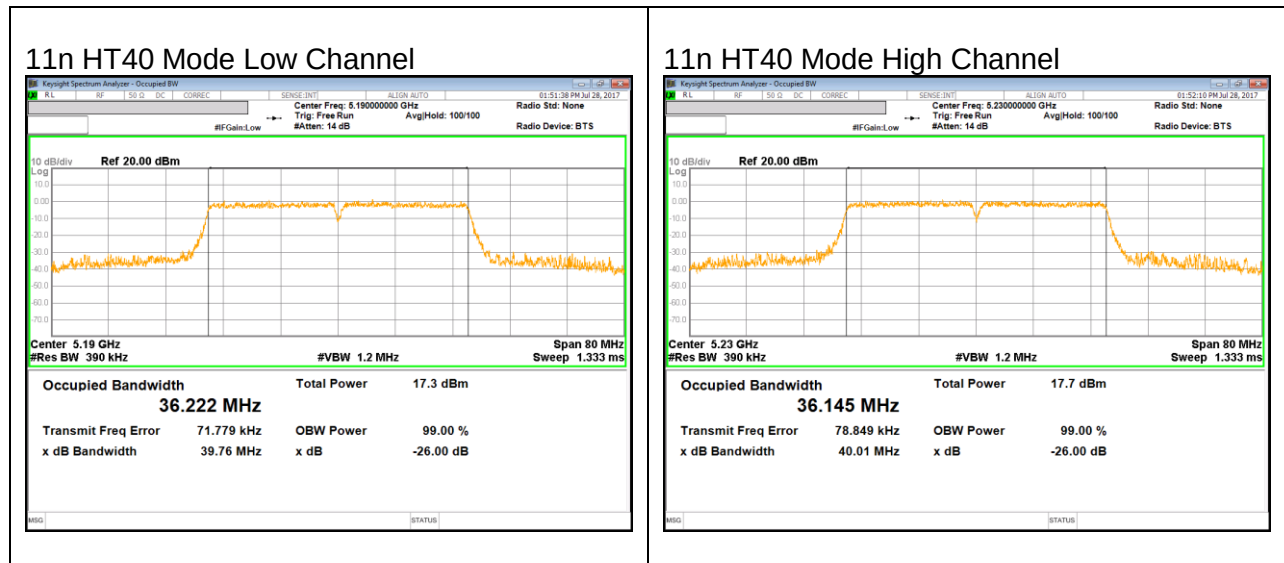


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

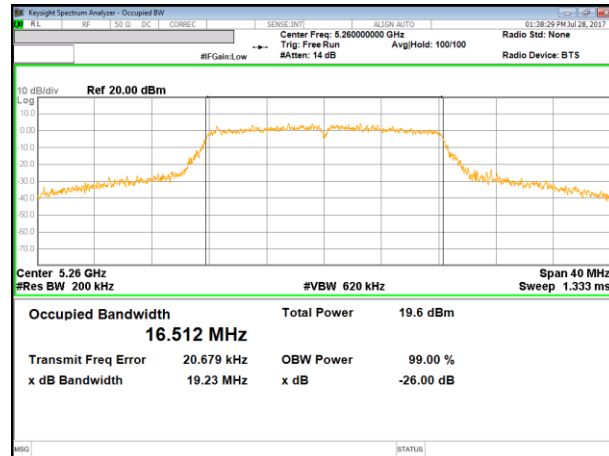

11a Mode Middle Channel

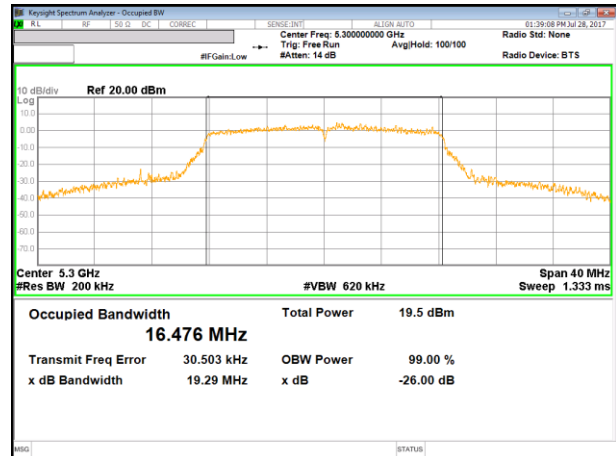


11a Mode High Channel

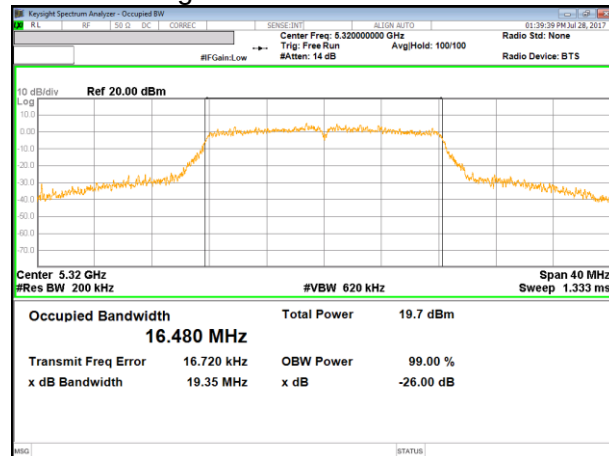


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

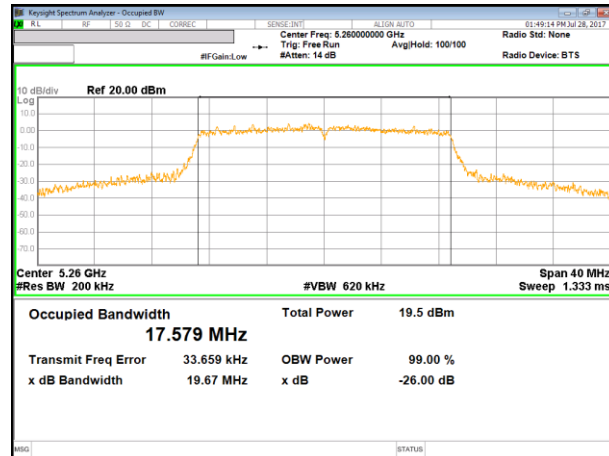


11n HT20 Mode Middle Channel

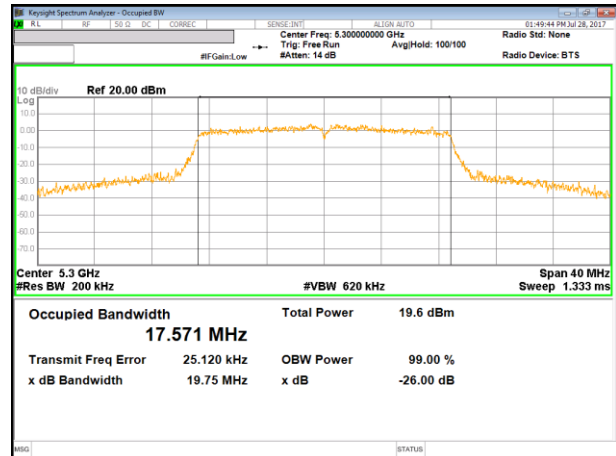

11n HT20 Mode High Channel

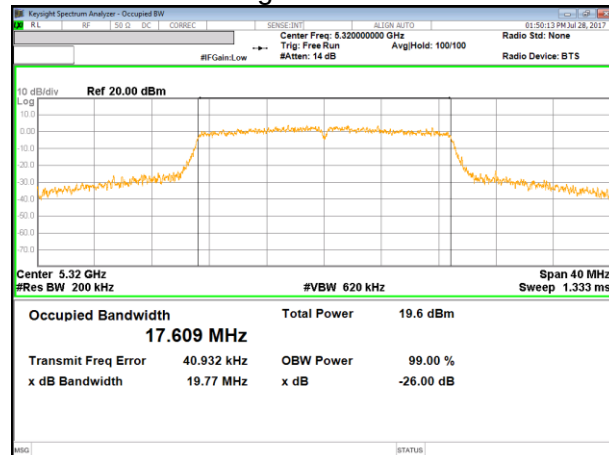


UNII 5.3 GHz IEEE 802.11n HT40 mode

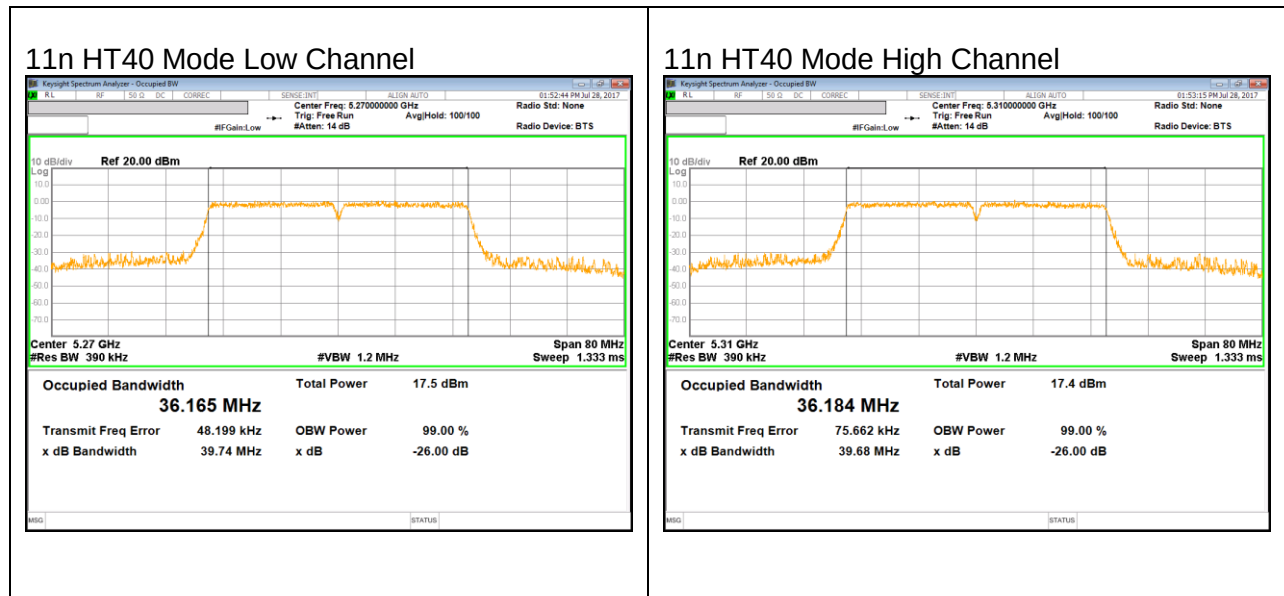


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

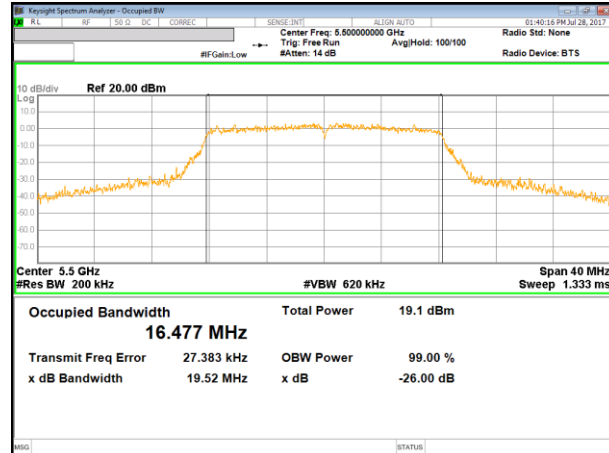


11a Mode Middle Channel

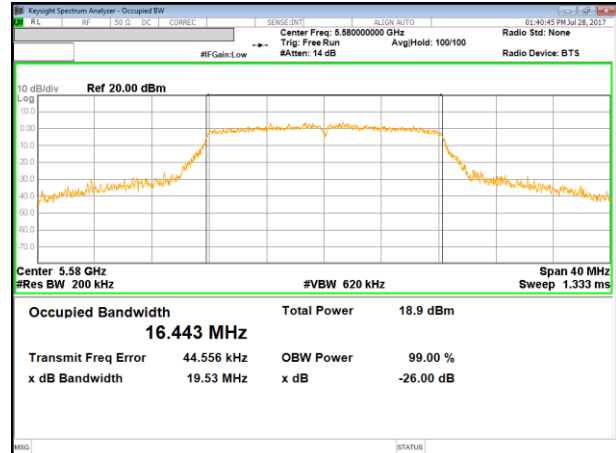

11a Mode High Channel

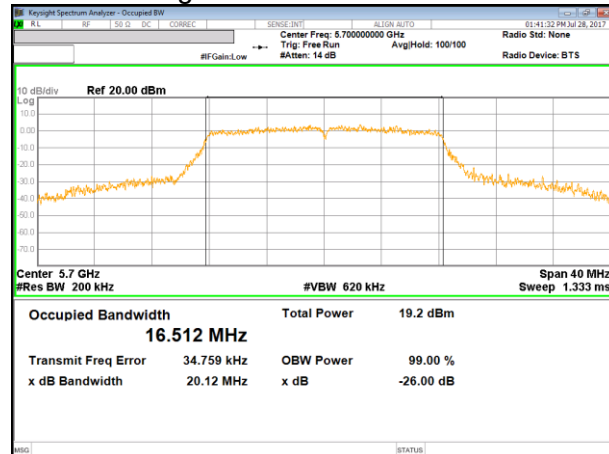


11a Mode Straddle Channel

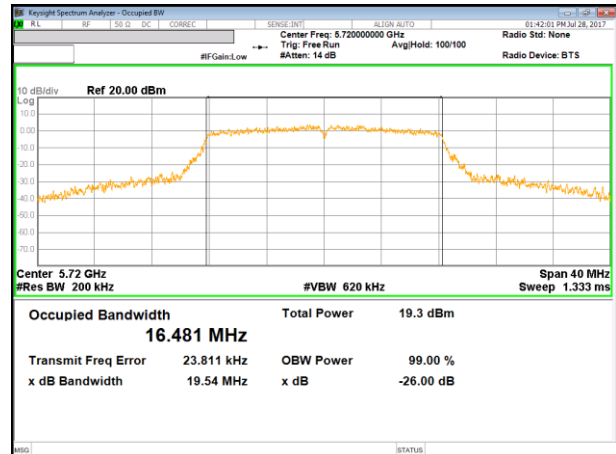


UNII 5.5 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

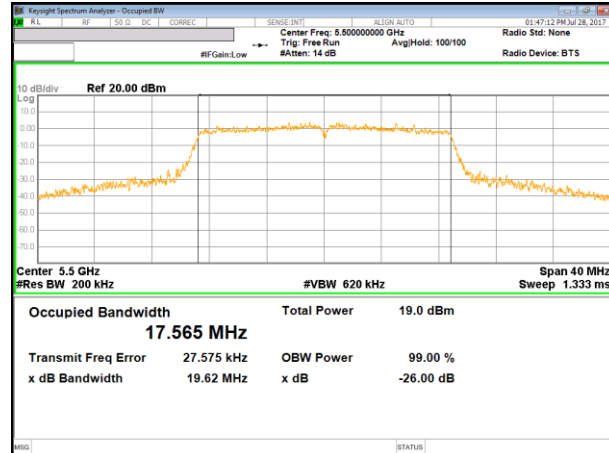


11n HT20 Mode Middle Channel

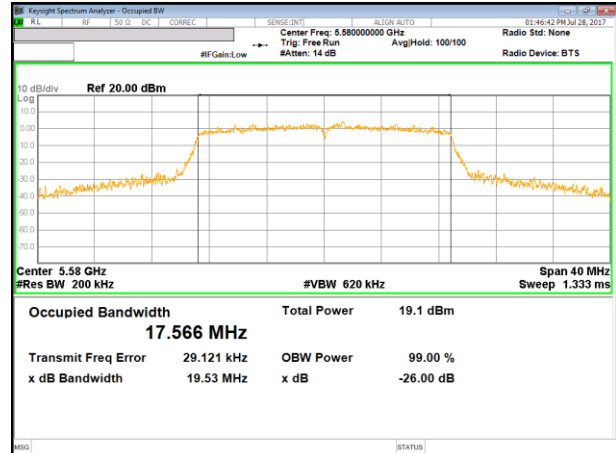

11n HT20 Mode High Channel

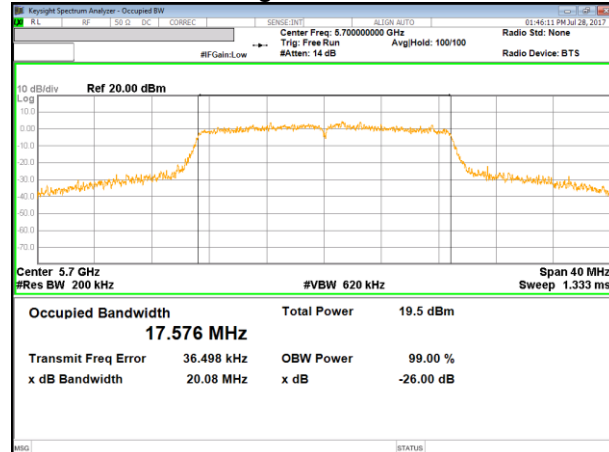


11n HT20 Mode Straddle Channel

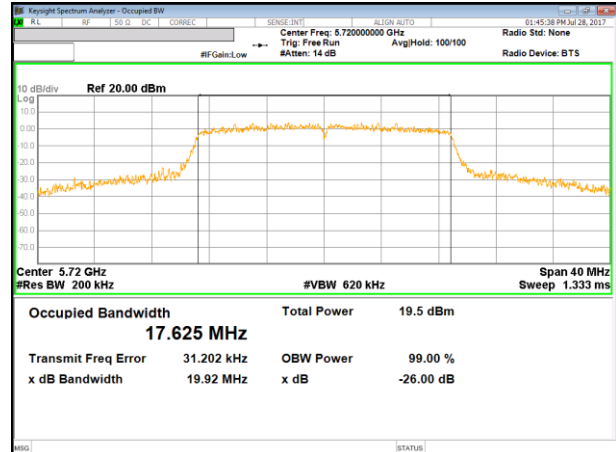


UNII 5.5 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Low Channel

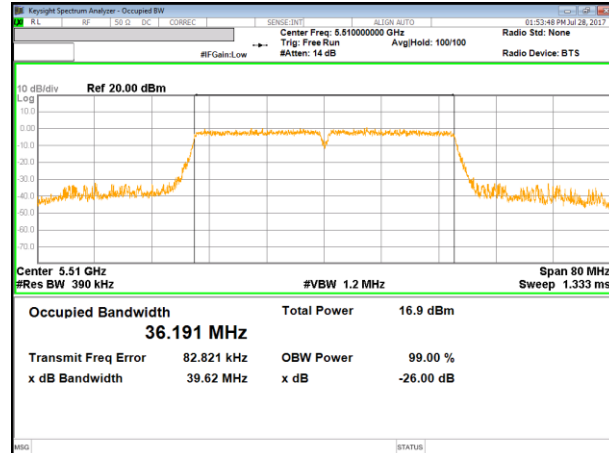


11n HT40 Mode Middle Channel

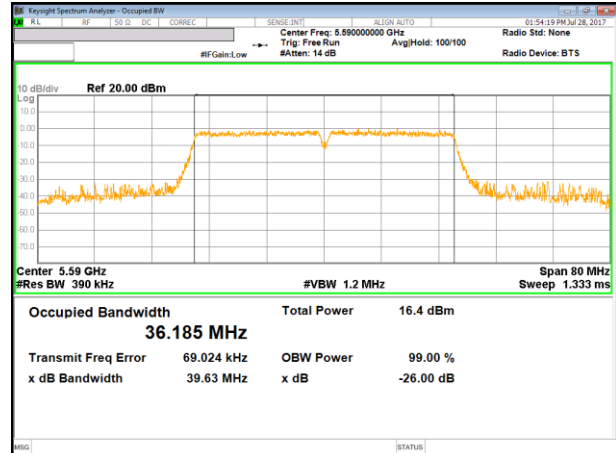

11n HT40 Mode High Channel

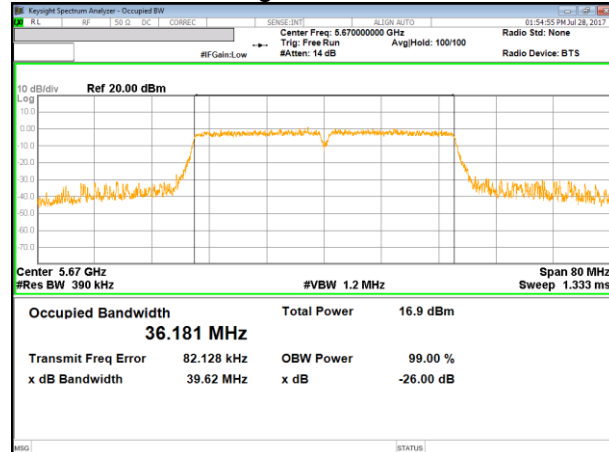


11n HT40 Mode Straddle Channel

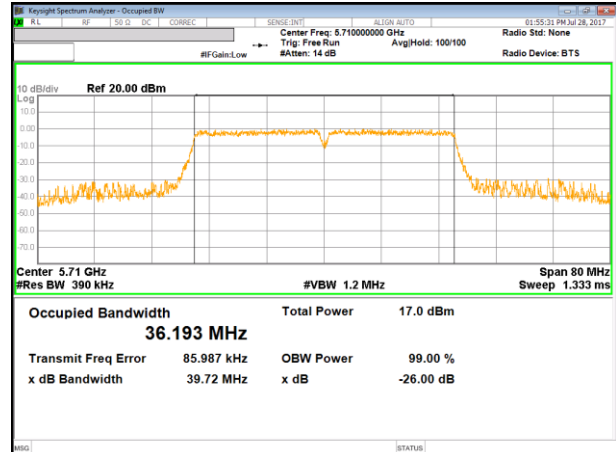


UNII 5.8 GHz IEEE 802.11a mode


11a Mode Low Channel

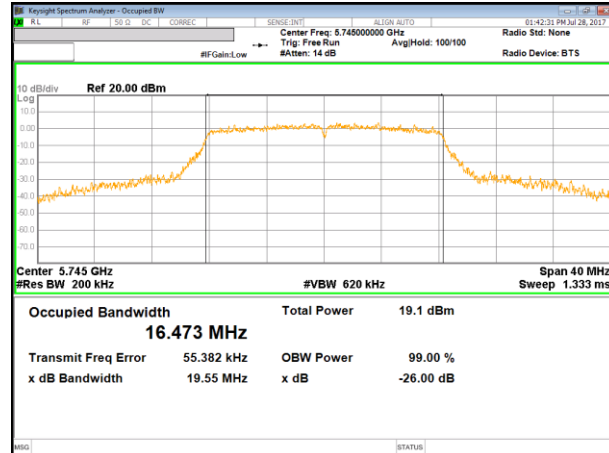

11a Mode Middle Channel

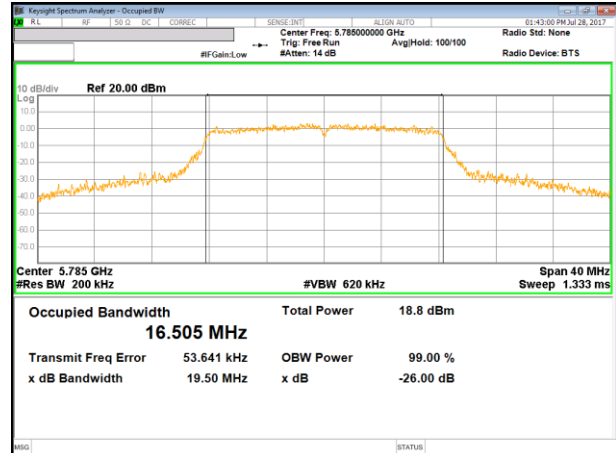


11a Mode High Channel

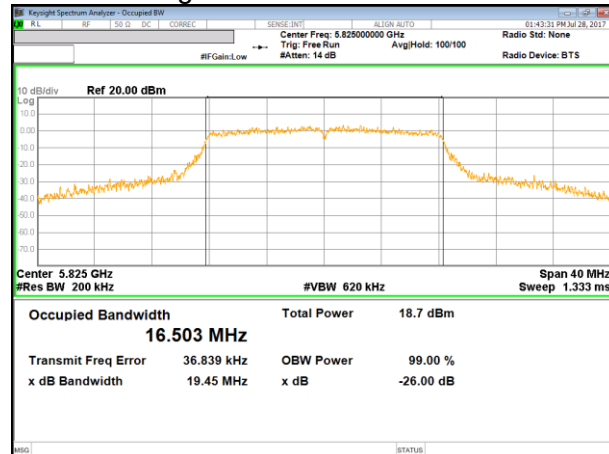


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

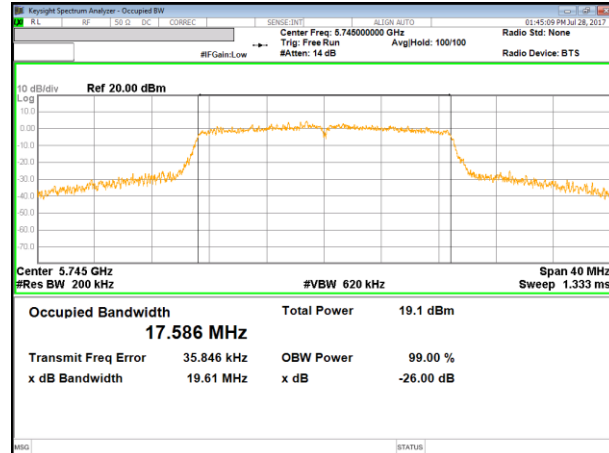

11n HT20 Mode Middle Channel

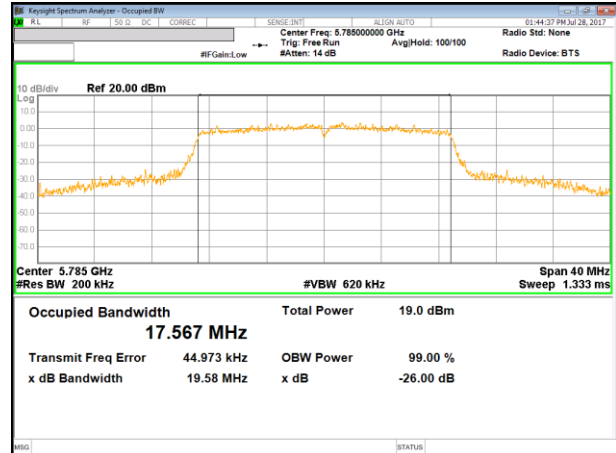


11n HT20 Mode High Channel

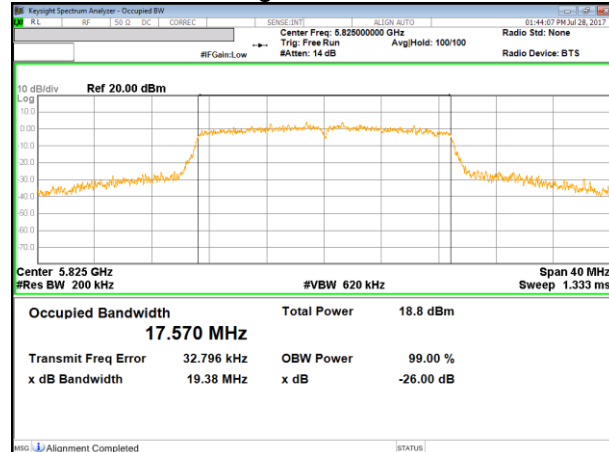


UNII 5.8 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

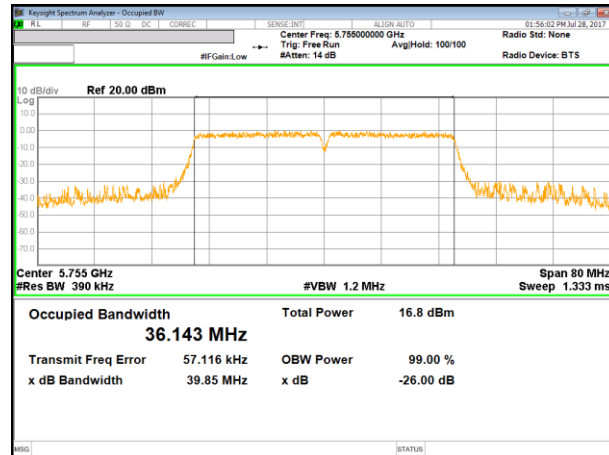

11n HT40 Mode High Channel

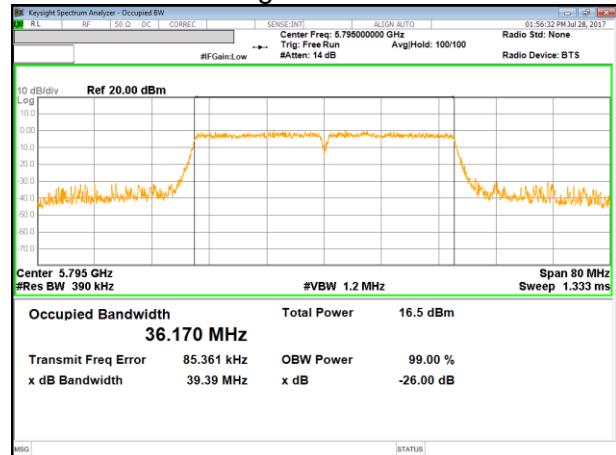

9. ANTENNA PORT TEST RESULTS

9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01r03: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

NOTE

- Calculation for 6dB Bandwidth of UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 6dB BW : 16.350MHz
- Starting Frequency of UNII-3 band : 5725MHz
- 6dB Bandwidth of UNII-3 band Portion
 $= (5720 + (16.350 / 2) - 5725) = 3.175 \text{ MHz}$

RESULTS

9.1.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5720	2.535	0.5
Low	5745	12.560	0.5
Mid	5785	15.130	0.5
High	5825	15.440	0.5
Worst		2.535	

9.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5720	2.565	0.5
Low	5745	17.290	0.5
Mid	5785	15.060	0.5
High	5825	15.020	0.5
Worst		2.565	


9.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5710	2.865	0.5
Low	5755	35.780	0.5
High	5795	35.830	0.5
Worst		2.865	


9.1.4. 6 dB BANDWIDTH PLOTS

IEEE 802.11a mode


11a Mode Low Channel

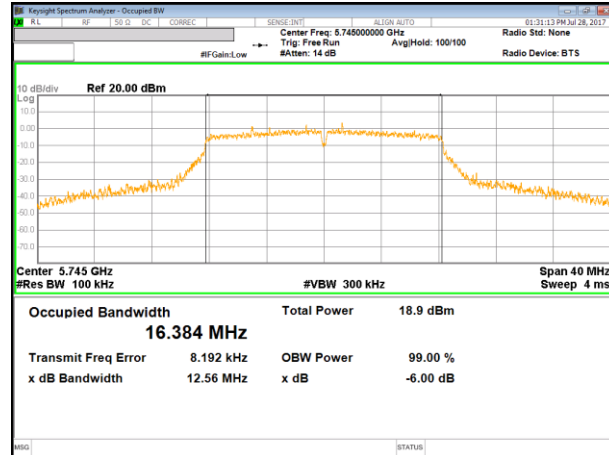


11a Mode Middle Channel

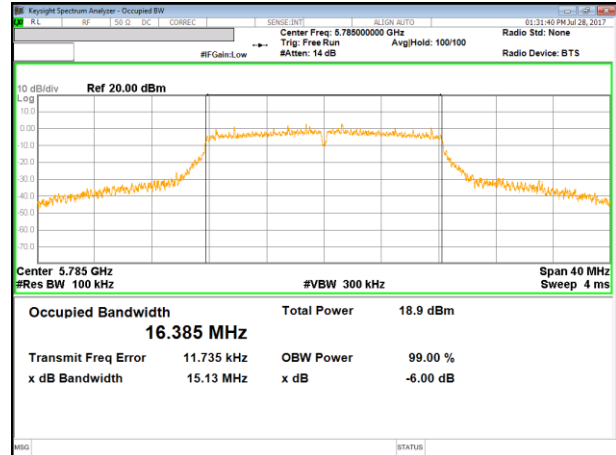

11a Mode High Channel

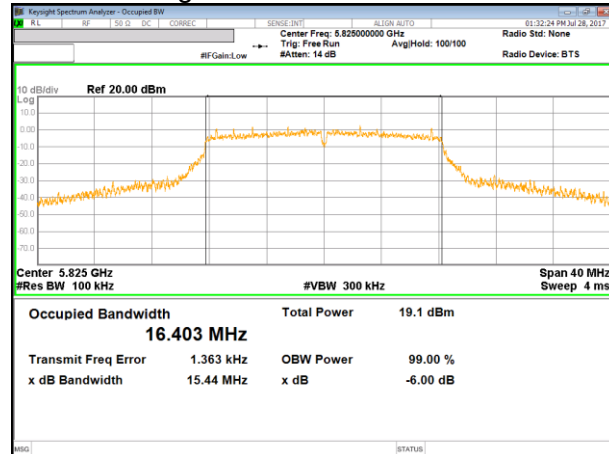


11a Mode Straddle Channel

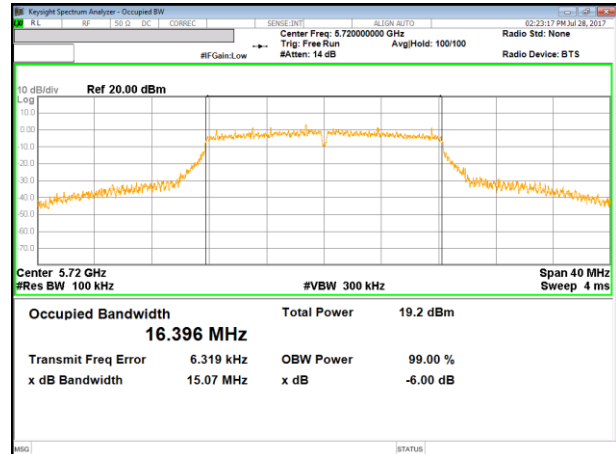


IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

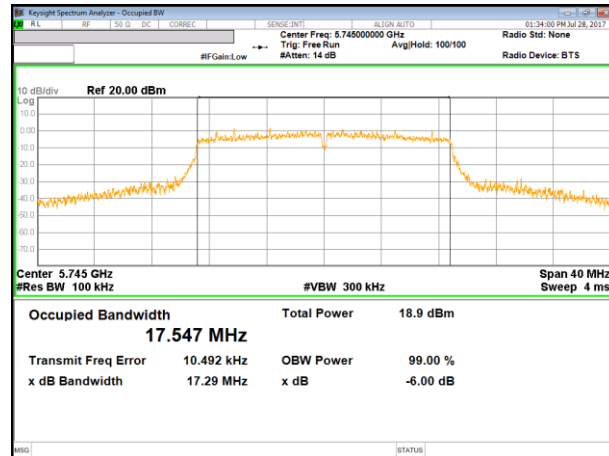


11n HT20 Mode Middle Channel

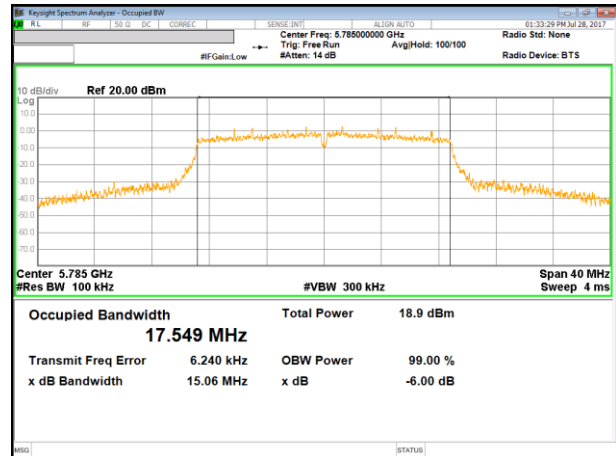

11n HT20 Mode High Channel

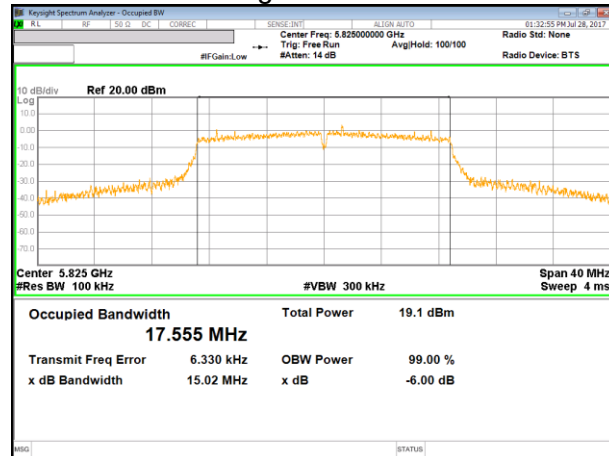


11n HT20 Mode Straddle Channel

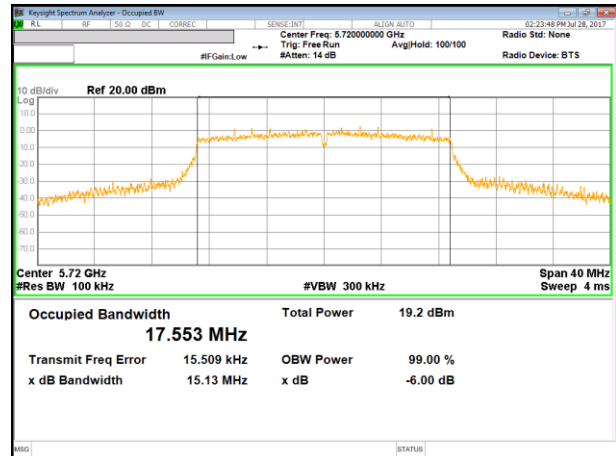


IEEE 802.11n HT40 mode


11n HT40 Mode Low Channel

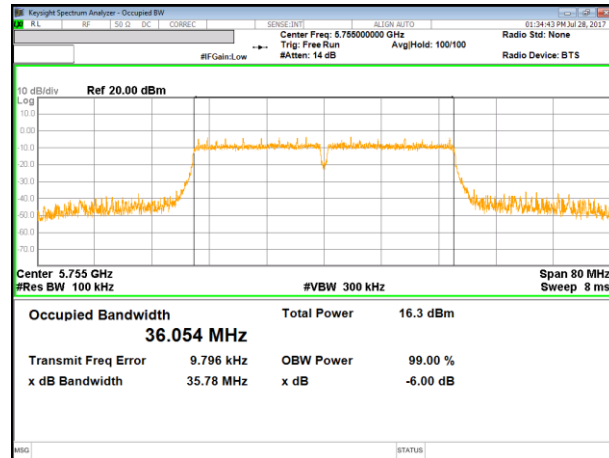

11n HT40 Mode High Channel

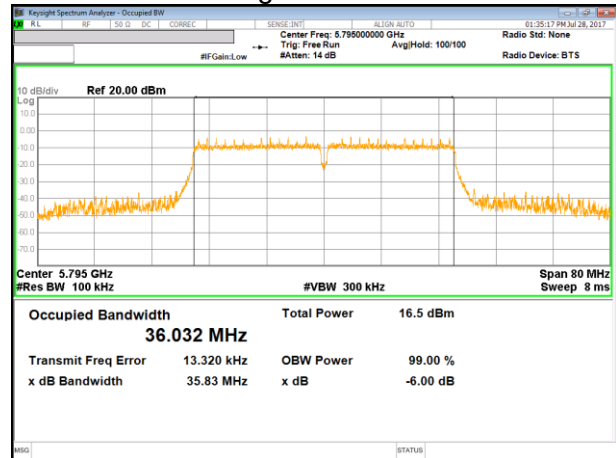

11n HT40 Mode Straddle Channel

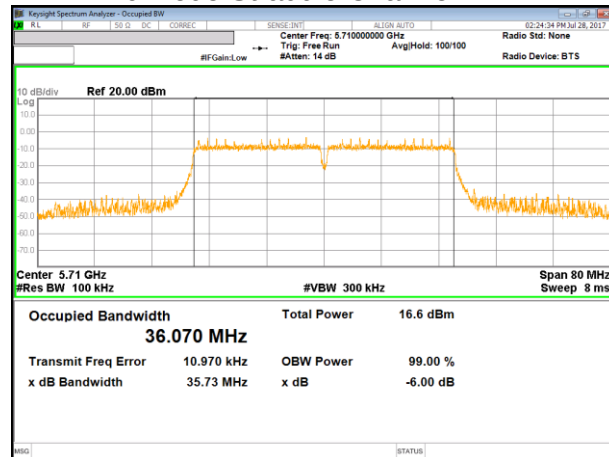

9.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

TEST PROCEDURE

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used for power and PPSD. RBW set to 1MHz (500kHz for the band 5.725-5.85 GHz, the VBW $\geq 3 \times$ RBW, RMS detector and trace averaging). Band power function used for power and peak marker value of the spectrum is used for PSD. Add duty cycle correction factor.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

5 GHz

Frequency Band [MHz]	Antenna Gain [dBi]
5150 - 5250	-8.30
5250 - 5350	-7.70
5470 - 5725	-6.80
5725 - 5850	-7.00

RESULTS

9.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	19.33	-8.30	-8.30
Mid	5200	19.47	-8.30	-8.30
High	5240	19.39	-8.30	-8.30

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5180	23.86	23.86	11.00
Mid	5200	23.89	23.89	11.00
High	5240	23.88	23.88	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	13.82	14.14	23.86	-9.72
Mid	5200	13.86	14.18	23.89	-9.71
High	5240	14.02	14.35	23.88	-9.53

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5180	4.58	4.90	11.00	-6.10
Mid	5200	4.41	4.73	11.00	-6.27
High	5240	4.38	4.70	11.00	-6.30

9.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	19.75	-8.30	-8.30
Mid	5200	19.93	-8.30	-8.30
High	5240	19.66	-8.30	-8.30

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5180	23.96	23.96	11.00
Mid	5200	24.00	24.00	11.00
High	5240	23.94	23.94	11.00

Duty Cycle CF [dB]	0.35	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	13.84	14.18	23.96	-9.77
Mid	5200	13.97	14.31	24.00	-9.68
High	5240	13.94	14.29	23.94	-9.65

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5180	4.30	4.64	11.00	-6.36
Mid	5200	4.12	4.47	11.00	-6.53
High	5240	3.91	4.25	11.00	-6.75

9.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5190	39.76	-8.30	-8.30
High	5230	40.01	-8.30	-8.30

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5190	24.00	24.00	11.00
High	5230	24.00	24.00	11.00

Duty Cycle CF [dB]	0.67	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5190	10.43	11.09	24.00	-12.91
High	5230	10.80	11.47	24.00	-12.53

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5190	-2.86	-2.19	11.00	-13.19
High	5230	-3.23	-2.56	11.00	-13.56

9.2.4. 802.11a MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5260	19.23	-7.70	-7.70
Mid	5300	19.29	-7.70	-7.70
High	5320	19.35	-7.70	-7.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5260	23.84	23.84	11.00
Mid	5300	23.85	23.85	11.00
High	5320	23.87	23.87	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	13.74	14.06	23.84	-9.78
Mid	5300	13.91	14.23	23.85	-9.62
High	5320	13.98	14.30	23.87	-9.56

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5260	4.17	4.50	11.00	-6.50
Mid	5300	4.32	4.65	11.00	-6.35
High	5320	4.38	4.70	11.00	-6.30

9.2.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	19.67	-7.70	-7.70
Mid	5300	19.75	-7.70	-7.70
High	5320	19.77	-7.70	-7.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5260	23.94	23.94	11.00
Mid	5300	23.96	23.96	11.00
High	5320	23.96	23.96	11.00

Duty Cycle CF [dB]	0.35	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	13.85	14.19	23.94	-9.74
Mid	5300	13.97	14.31	23.96	-9.64
High	5320	13.91	14.25	23.96	-9.71

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5260	4.25	4.60	11.00	-6.40
Mid	5300	3.88	4.23	11.00	-6.77
High	5320	3.85	4.20	11.00	-6.80

9.2.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5270	39.74	-7.70	-7.70
High	5310	39.68	-7.70	-7.70

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5270	24.00	24.00	11.00
High	5310	24.00	24.00	11.00

Duty Cycle CF [dB]	0.67	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5270	10.55	11.21	24.00	-12.79
High	5310	10.77	11.43	24.00	-12.57

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5270	-3.26	-2.59	11.00	-13.59
High	5310	-3.28	-2.62	11.00	-13.62

9.2.7. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5500	19.52	-6.80	-6.80
Mid	5580	19.53	-6.80	-6.80
High	5700	20.12	-6.80	-6.80

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5500	23.90	23.90	11.00
Mid	5580	23.91	23.91	11.00
High	5700	24.00	24.00	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	13.25	13.58	23.90	-10.33
Mid	5580	13.39	13.71	23.91	-10.20
High	5700	13.61	13.94	24.00	-10.06

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5500	3.68	4.01	11.00	-6.99
Mid	5580	3.89	4.21	11.00	-6.79
High	5700	4.11	4.44	11.00	-6.56

9.2.8. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5500	19.62	-6.80	-6.80
Mid	5580	19.53	-6.80	-6.80
High	5700	20.08	-6.80	-6.80

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5500	23.93	23.93	11.00
Mid	5580	23.91	23.91	11.00
High	5700	24.00	24.00	11.00

Duty Cycle CF [dB]	0.35	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	13.36	13.71	23.93	-10.22
Mid	5580	13.48	13.82	23.91	-10.09
High	5700	13.79	14.14	24.00	-9.86

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5500	3.81	4.15	11.00	-6.85
Mid	5580	3.57	3.91	11.00	-7.09
High	5700	3.86	4.21	11.00	-6.79

9.2.9. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5510	39.62	-6.80	-6.80
Mid	5550	39.63	-6.80	-6.80
High	5670	39.62	-6.80	-6.80

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5510	24.00	24.00	11.00
Mid	5550	24.00	24.00	11.00
High	5670	24.00	24.00	11.00

Duty Cycle CF [dB]	0.67	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5510	10.59	11.26	24.00	-12.74
Mid	5550	10.31	10.97	24.00	-13.03
High	5670	10.63	11.30	24.00	-12.70

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5510	-2.74	-2.08	11.00	-13.08
Mid	5550	-3.11	-2.45	11.00	-13.45
High	5670	-3.03	-2.37	11.00	-13.37

9.2.10. 802.11a MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5745	19.55	-7.00	-7.00
Mid	5785	19.50	-7.00	-7.00
High	5825	19.45	-7.00	-7.00

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5745	23.91	23.91	30.00
Mid	5785	23.90	23.90	30.00
High	5825	23.89	23.89	30.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	13.25	13.58	23.91	-10.34
Mid	5785	13.24	13.57	23.90	-10.33
High	5825	13.30	13.63	23.89	-10.26

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5745	0.76	1.09	30.00	-28.91
Mid	5785	0.68	1.00	30.00	-29.00
High	5825	0.61	0.94	30.00	-29.06

9.2.11. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
Low	5745	19.61	-7.00	-7.00
Mid	5785	19.58	-7.00	-7.00
High	5825	19.38	-7.00	-7.00

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
Low	5745	23.92	23.92	30.00
Mid	5785	23.92	23.92	30.00
High	5825	23.87	23.87	30.00

Duty Cycle CF [dB]	0.35	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	13.41	13.76	23.92	-10.17
Mid	5785	13.17	13.52	23.92	-10.40
High	5825	13.27	13.61	23.87	-10.26

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
Low	5745	0.75	1.10	30.00	-28.90
Mid	5785	0.51	0.86	30.00	-29.14
High	5825	0.56	0.91	30.00	-29.09

9.2.12. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5755	39.85	-7.00	-7.00
High	5795	39.39	-7.00	-7.00

Limits

Channel	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
Low	5755	24.00	24.00	30.00
High	5795	24.00	24.00	30.00

Duty Cycle CF [dB]	0.67	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5755	10.41	11.07	24.00	-12.93
High	5795	10.15	10.82	24.00	-13.18

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
Low	5755	-6.46	-5.80	30.00	-35.80
High	5795	-6.65	-5.98	30.00	-35.98

9.2.13. 802.11a MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
UNII-2C	5720	14.77	-6.80	-6.80
UNII-3	5720	4.77	-6.80	-6.80
Whole	5720	19.54	-6.80	-6.80

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
UNII-2C	5720	22.69	22.69	11.00
UNII-3	5720	17.79	17.79	11.00
Whole	5720	23.91	23.91	11.00

Duty Cycle CF [dB]	0.32	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5720	12.73	13.05	22.69	-9.64
UNII-3	5720	5.37	5.70	17.79	-12.09
Whole	5720	13.46	13.79	23.91	-10.12

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
144	5720	3.73	4.06	11.00	-6.94

9.2.14. 802.11n HT20 MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSP [dBi]
UNII-2C	5720	14.96	-6.80	-6.80
UNII-3	5720	4.96	-6.80	-6.80
Whole	5720	19.92	-6.80	-6.80

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSP Limit [dBm]
UNII-2C	5720	22.75	22.75	11.00
UNII-3	5720	17.95	17.95	11.00
Whole	5720	23.99	23.99	11.00

Duty Cycle CF [dB]	0.35	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5720	12.62	12.97	22.75	-9.78
UNII-3	5720	5.73	6.08	17.95	-11.88
Whole	5720	13.43	13.78	23.99	-10.22

PPSP Results

Channel	Frequency [MHz]	Meas PPSP [dBm]	Total Corr'd PPSP [dBm]	PPSP Limit [dBm]	PPSP Margin [dB]
144	5720	3.61	3.96	11.00	-7.04

9.2.15. 802.11n HT40 MODE AT STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
UNII-2C	5710	34.86	-6.80	-6.80
UNII-3	5710	4.86	-6.80	-6.80
Whole	5710	39.72	-6.80	-6.80

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm]
UNII-2C	5710	24.00	24.00	11.00
UNII-3	5710	17.87	17.87	11.00
Whole	5710	24.00	24.00	11.00

Duty Cycle CF [dB]	0.67	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Portion	Frequency [MHz]	Total Corr'd Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5710	10.15	10.82	24.00	-13.18
UNII-3	5710	-0.09	0.57	17.87	-17.29
Whole	5710	10.55	11.21	24.00	-12.79


PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm]	Total Corr'd PPSD [dBm]	PPSD Limit [dBm]	PPSD Margin [dB]
142	5710	-3.48	-2.82	11.00	-13.82


9.2.16. OUTPUT POWER AND PPSD PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

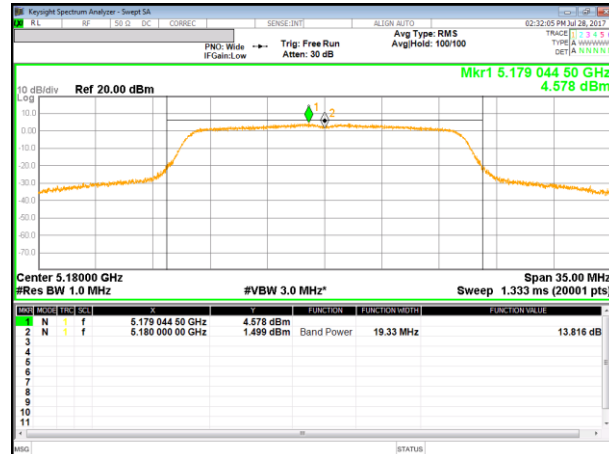

11a Mode Middle Channel

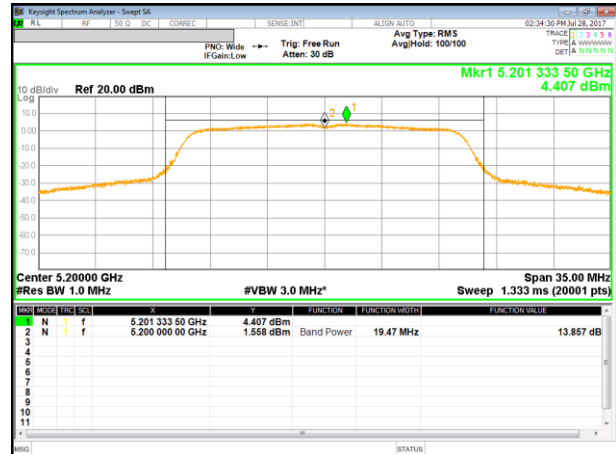


11a Mode High Channel

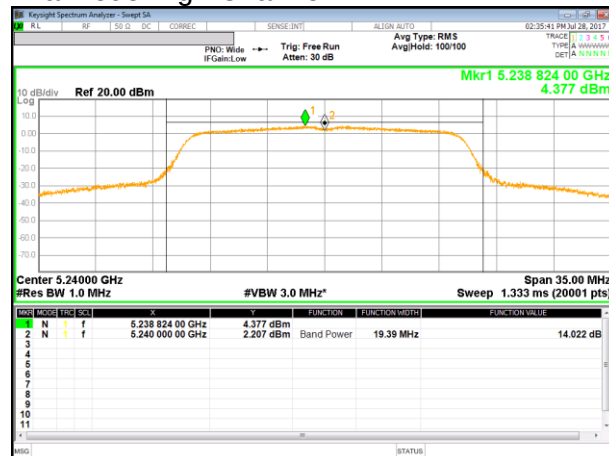


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

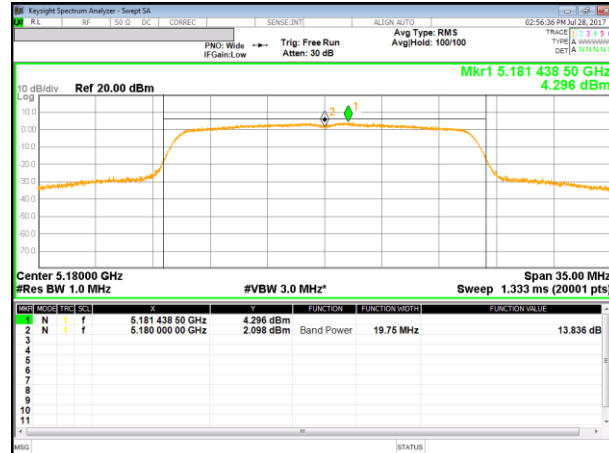


11n HT20 Mode Middle Channel

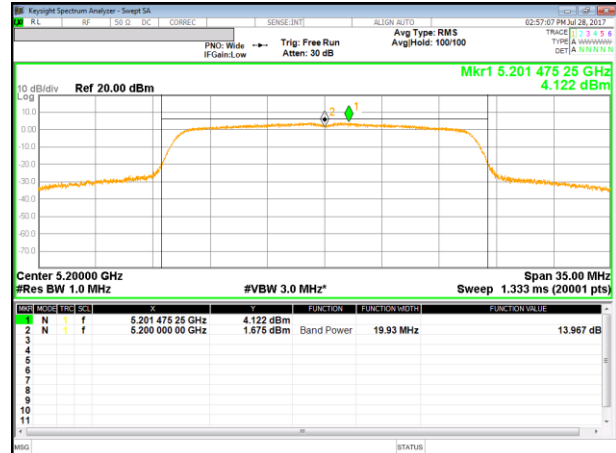

11n HT20 Mode High Channel

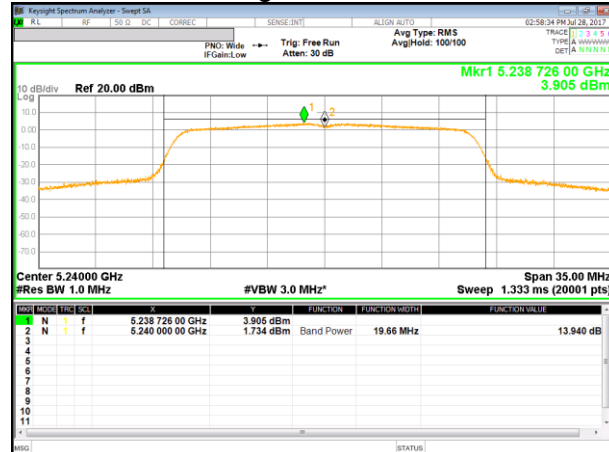


UNII 5.2 GHz IEEE 802.11n HT40 mode

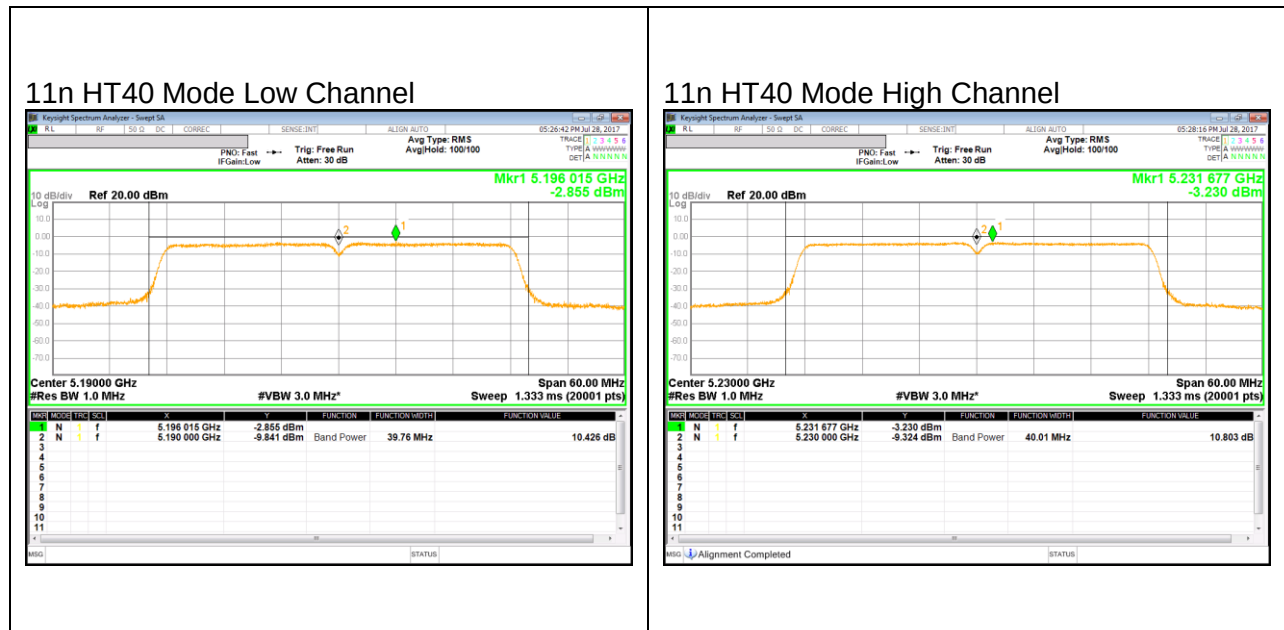


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel Primary

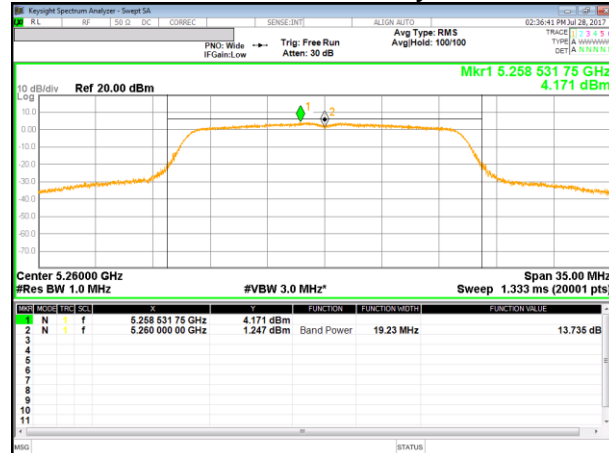

11a Mode Middle Channel Secondary

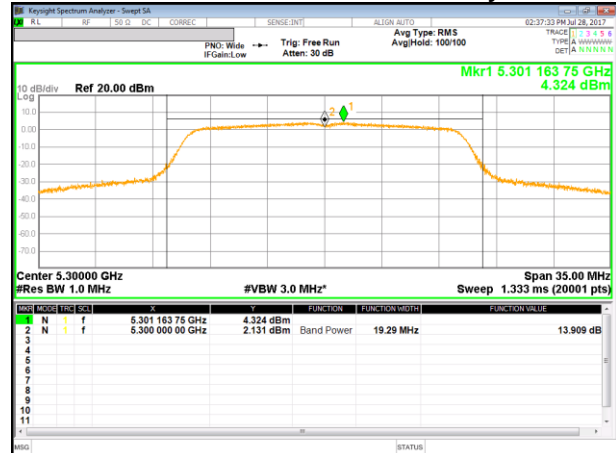


11a Mode High Channel Primary

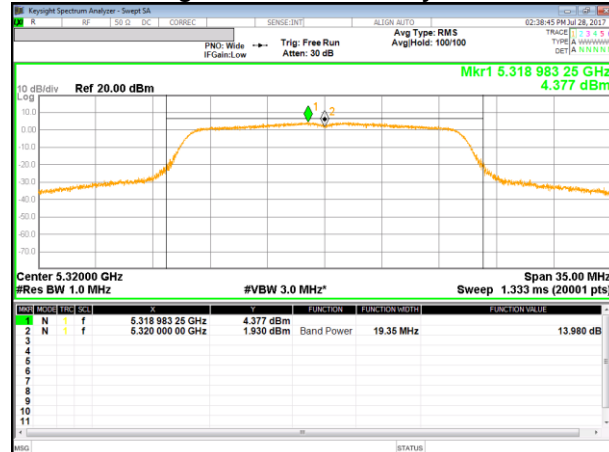


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

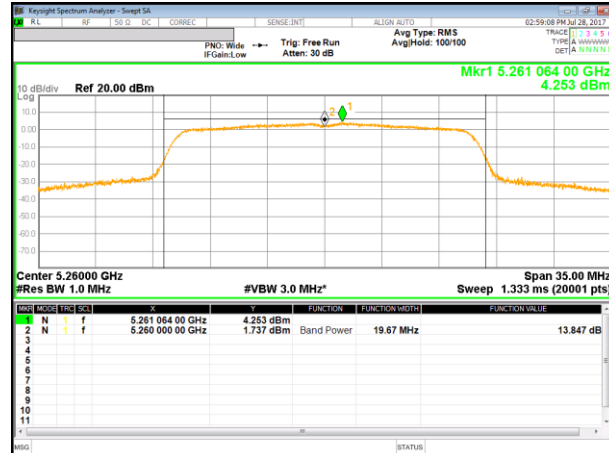


11n HT20 Mode Middle Channel

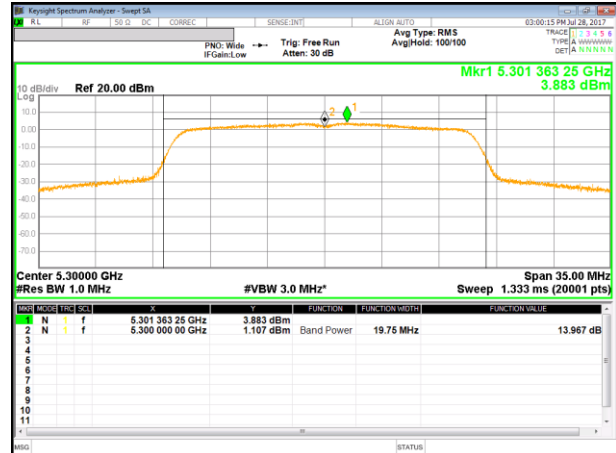

11n HT20 Mode High Channel

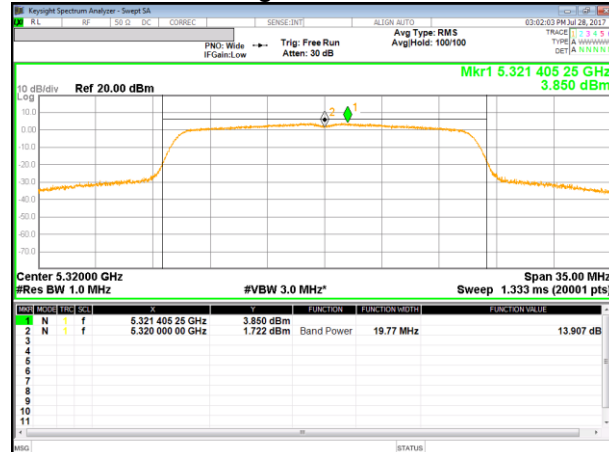


UNII 5.3 GHz IEEE 802.11n HT40 mode

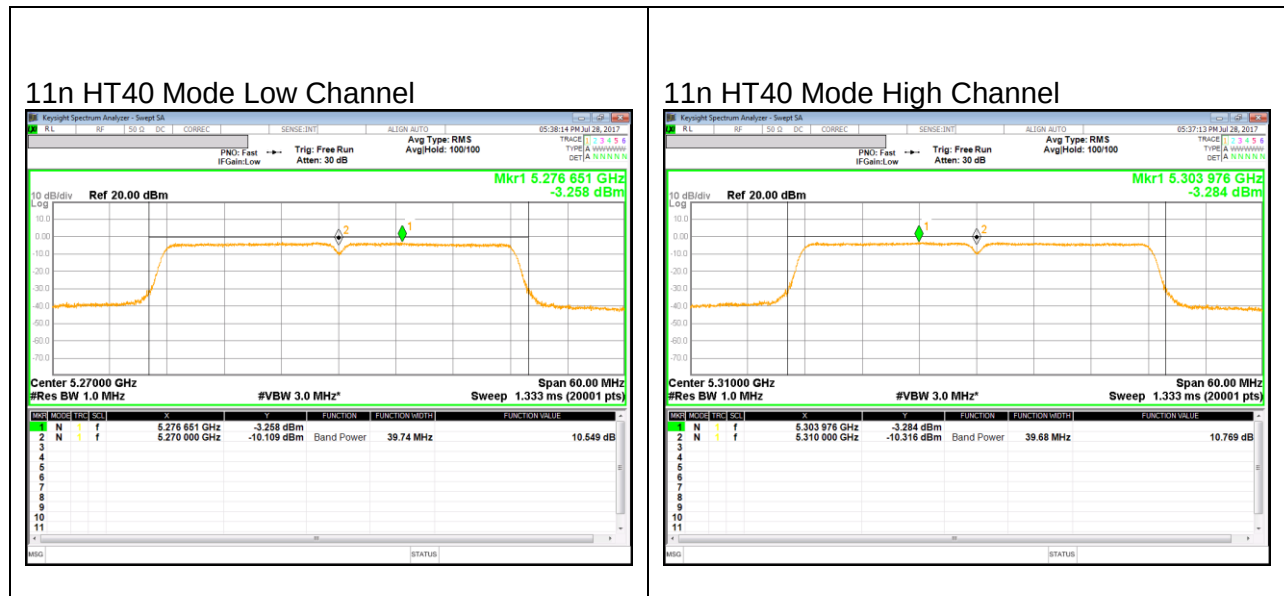


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

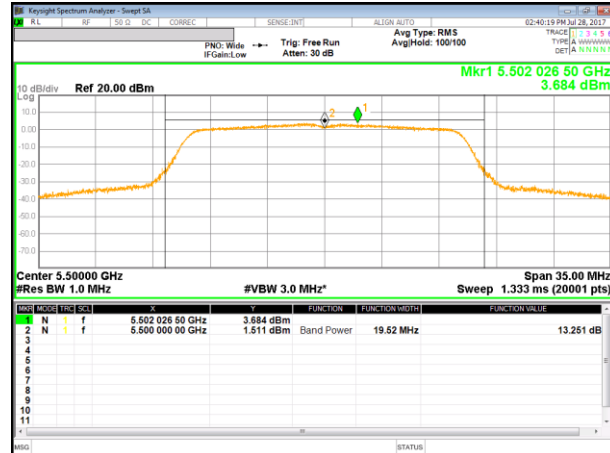


11a Mode Middle Channel

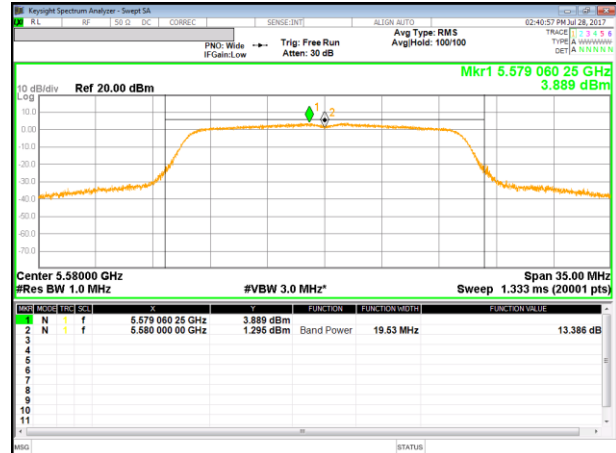

11a Mode High Channel

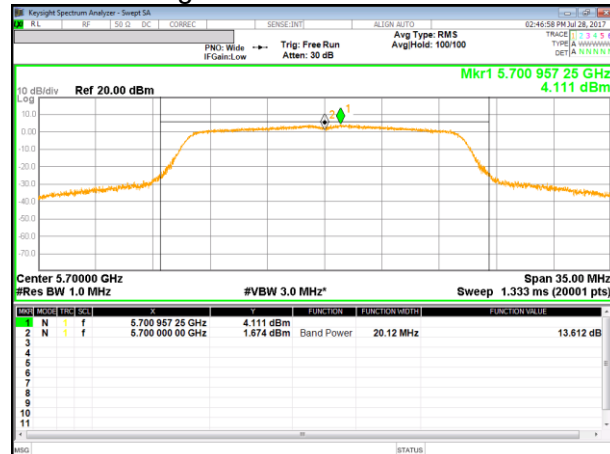


11a Mode Starddle Channel

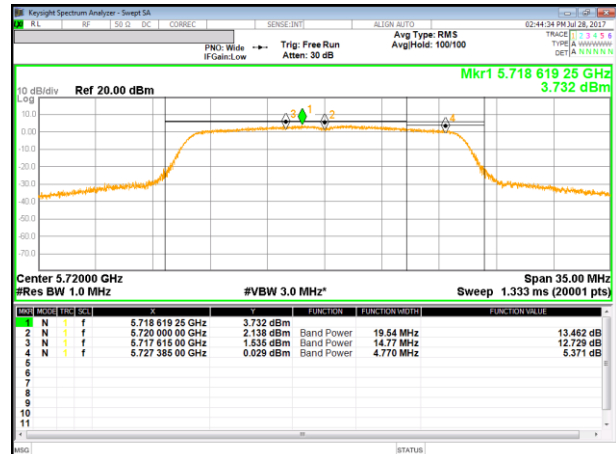


UNII 5.5 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

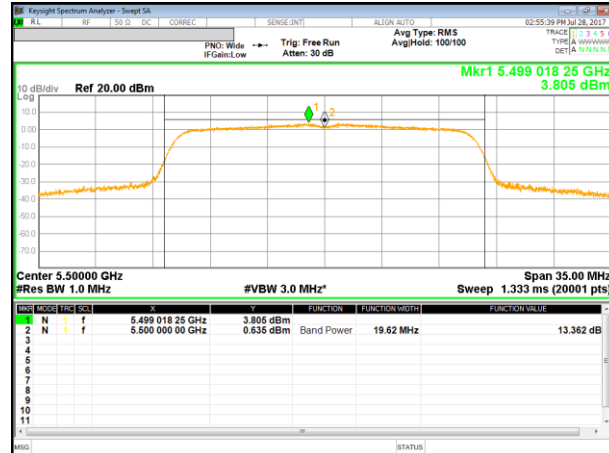


11n HT20 Mode Middle Channel

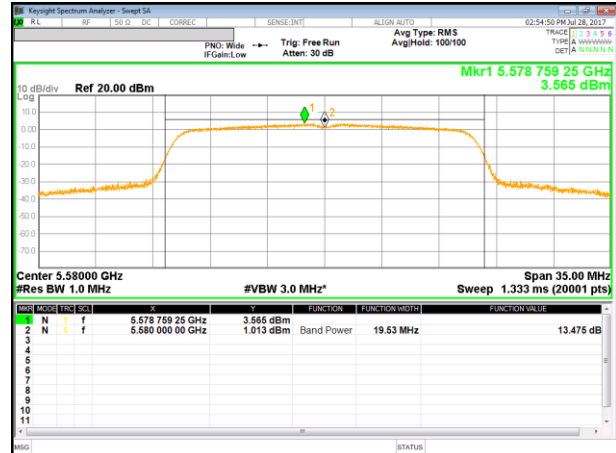

11n HT20 Mode High Channel

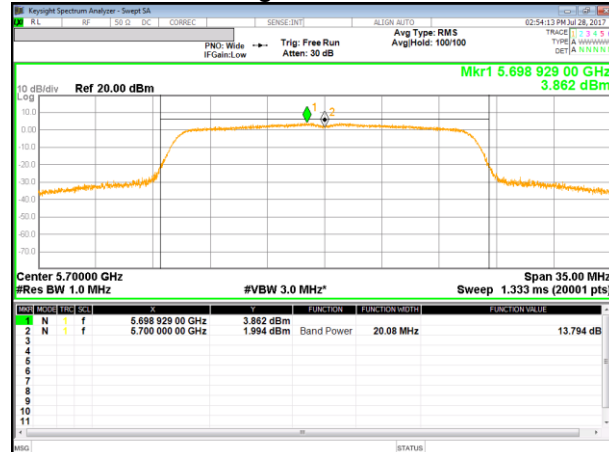


11n HT20 Mode Starddle Channel

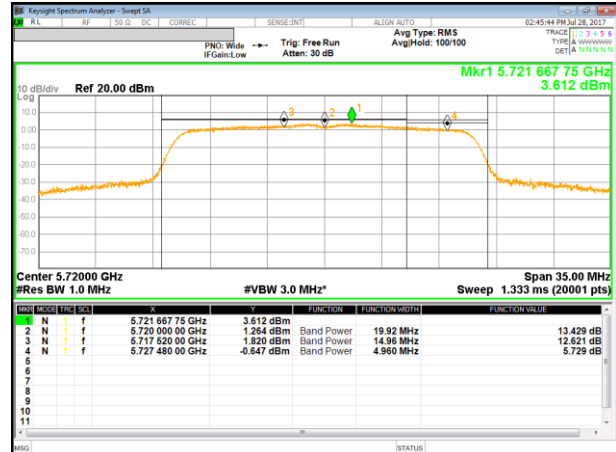


UNII 5.5 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

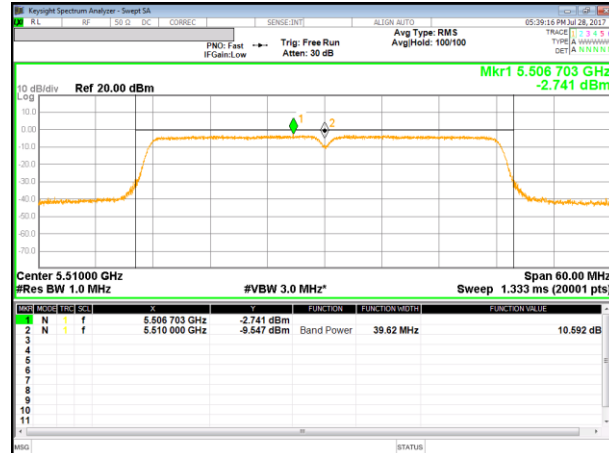

11n HT40 Mode Middle Channel

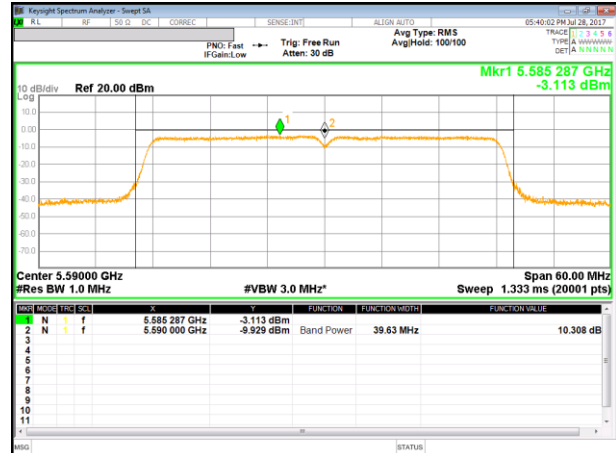

11n HT40 Mode High Channel



11n HT40 Mode Starddle Channel

