

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	31170016 87171_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.687	45.56	PK	29.5	-39.5	0	35.56	-	-	74	-38.44	-	-	0-360	150	H
2	* 1.25	45.78	PK	28.3	-40.2	0	33.88	-	-	74	-40.12	-	-	0-360	250	V
3	* 10.639	30.74	PK	37.9	-27.6	0	41.04	-	-	74	-32.96	-	-	0-360	250	H
5	* 15.959	23.97	PK	40.6	-19.8	0	44.77	-	-	74	-29.23	-	-	0-360	150	H
4	* 10.639	31.43	PK	37.9	-27.6	0	41.73	-	-	74	-32.27	-	-	0-360	250	V
6	* 15.955	23.21	PK	40.6	-19.7	0	44.11	-	-	74	-29.89	-	-	0-360	150	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.3GHz BAND AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

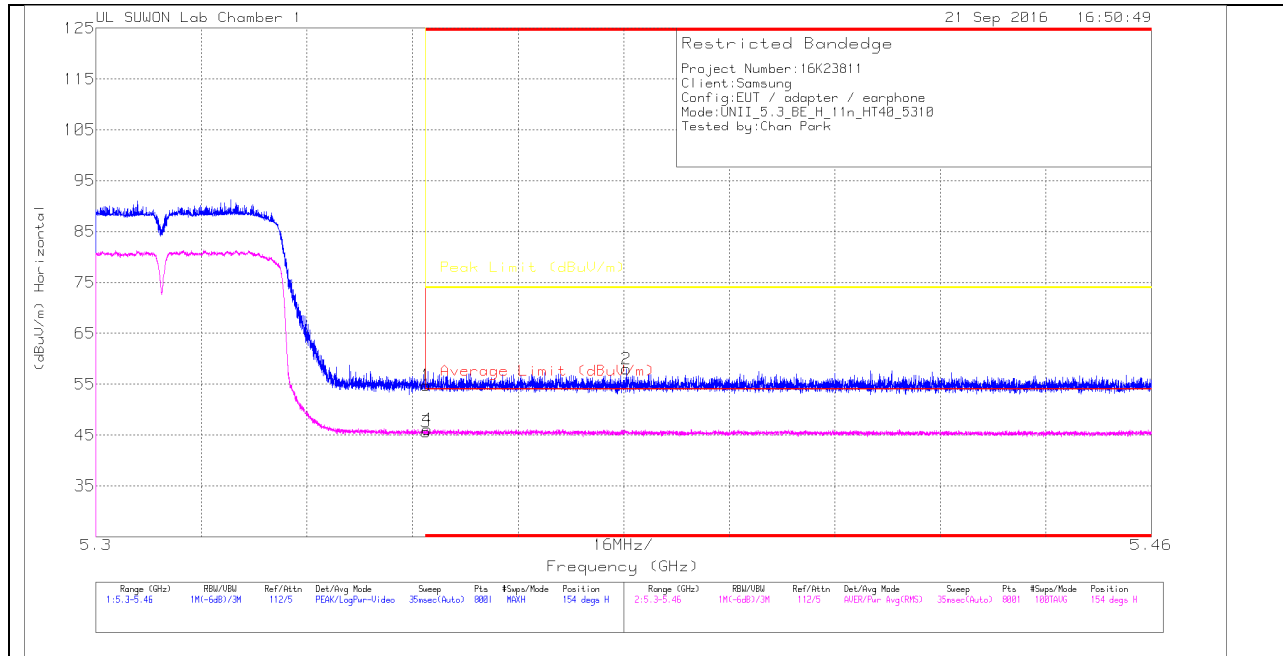

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.56	Pk	34.5	-23.3	0	54.76	-	-	74	-19.24	154	107	H
2	* 5.38	46.84	Pk	34.5	-23.3	0	58.04	-	-	74	-15.96	154	107	H
3	* 5.35	33.82	RMS	34.5	-23.3	.63	45.65	54	-8.35	-	-	154	107	H
4	* 5.35	34.31	RMS	34.5	-23.3	.63	46.14	54	-7.86	-	-	154	107	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

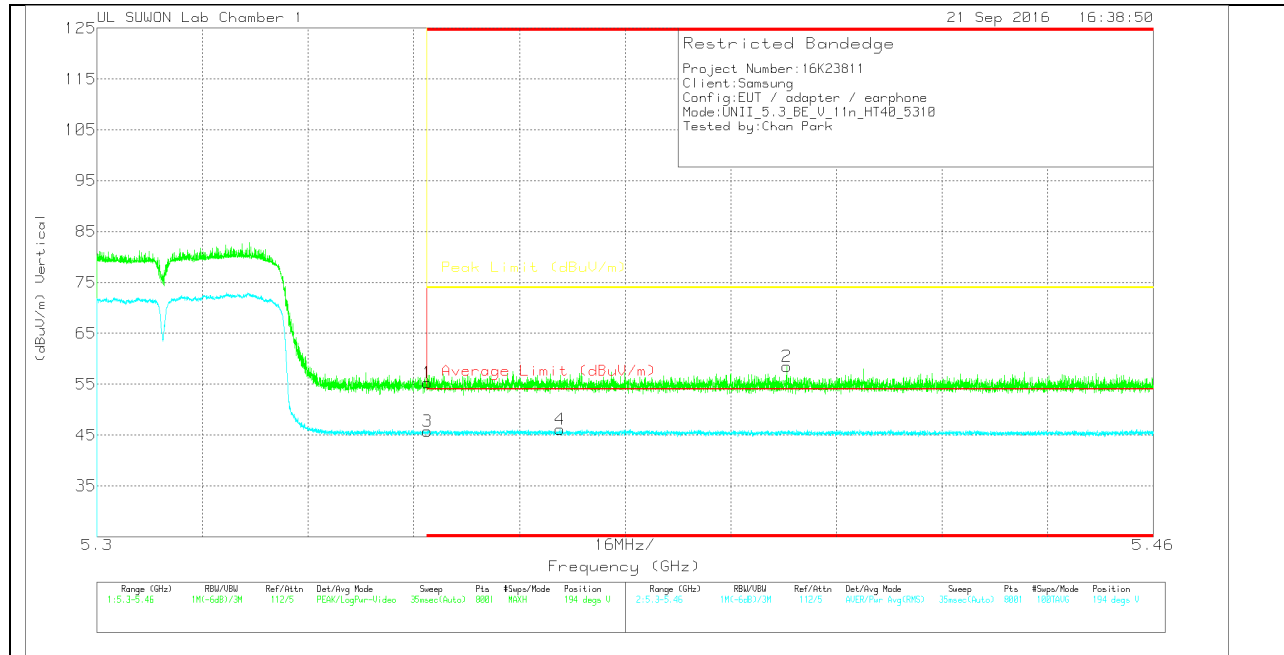

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.07	Pk	34.5	-23.3	0	55.27	-	-	74	-18.73	194	178	V
2	* 5.404	47.15	Pk	34.6	-23.3	0	58.45	-	-	74	-15.55	194	178	V
3	* 5.35	33.88	RMS	34.5	-23.3	.63	45.71	54	-8.29	-	-	194	178	V
4	* 5.37	34.31	RMS	34.5	-23.3	.63	46.14	54	-7.86	-	-	194	178	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

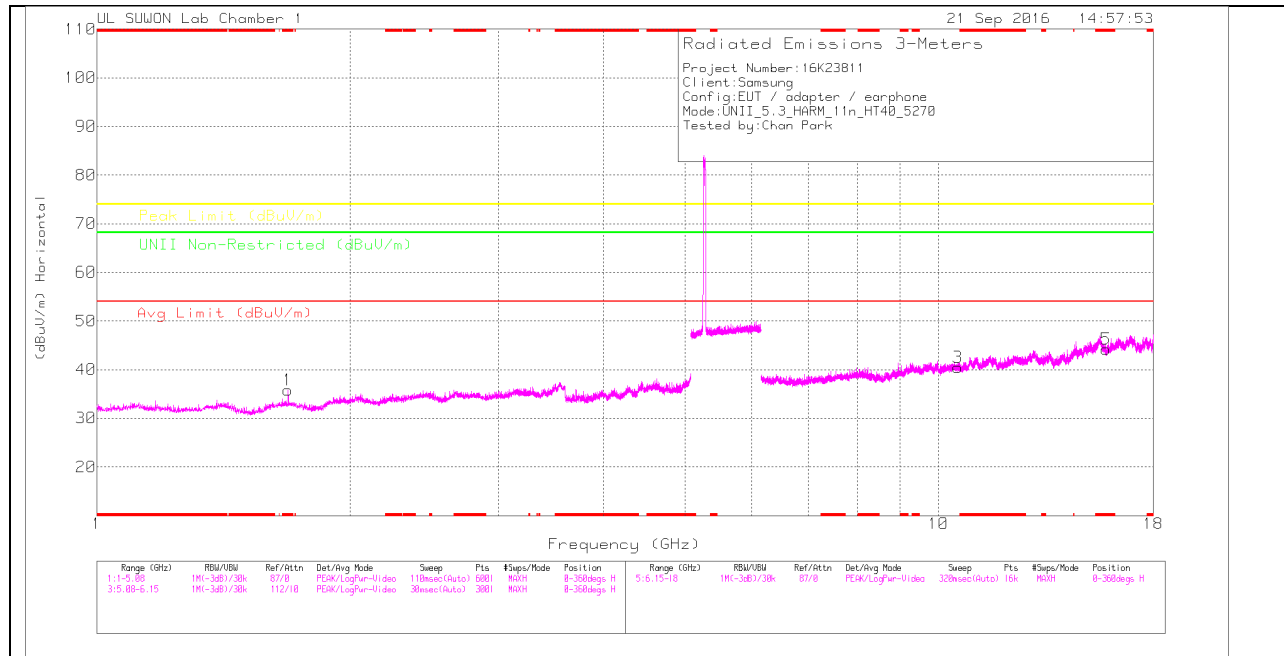

LOW CHANNEL VERTICAL

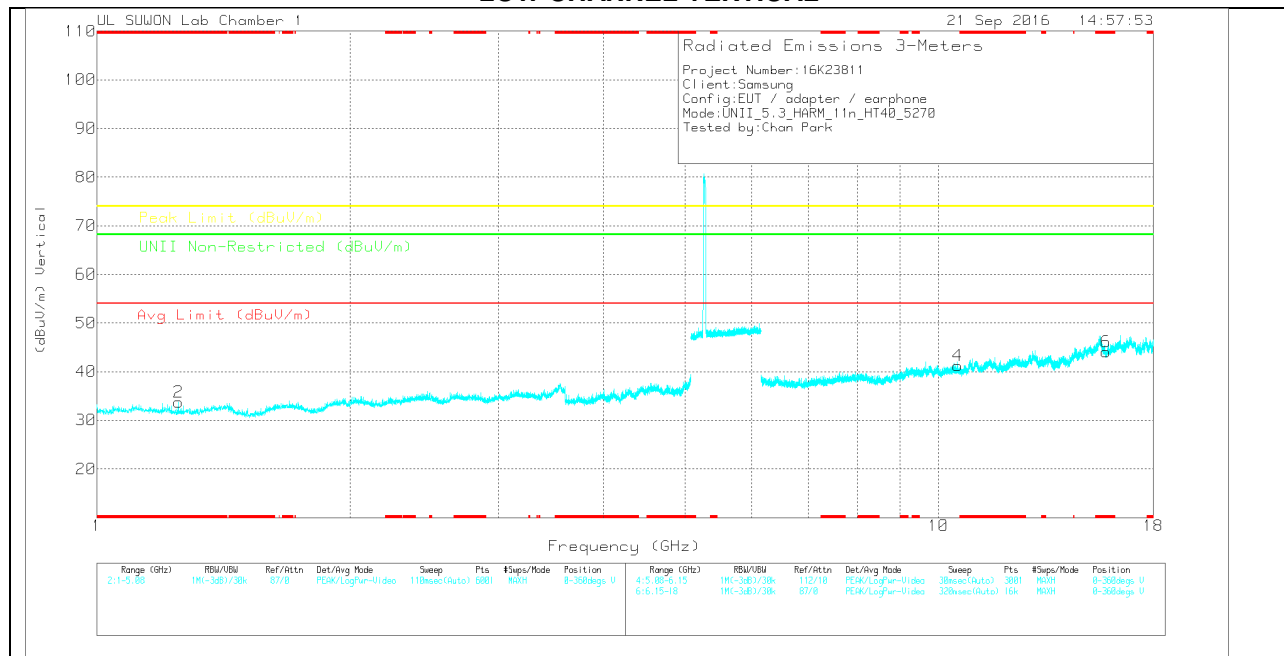

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.687	45.83	PK	29.5	-39.5	0	35.83	-	-	74	-38.17	-	-	0-360	150	H
2	* 1.25	45.65	PK	28.3	-40.2	0	33.75	-	-	74	-40.25	-	-	0-360	250	V
3	10.542	29.67	PK	37.9	-27.1	0	40.47	-	-	-	-	68.2	-27.73	0-360	250	H
5	* 15.811	22.25	PK	40.5	-18.5	0	44.25	-	-	74	-29.75	-	-	0-360	250	H
4	10.539	30.38	PK	37.9	-27.1	0	41.18	-	-	-	-	68.2	-27.02	0-360	250	V
6	* 15.809	22.02	PK	40.5	-18.4	0	44.12	-	-	74	-29.88	-	-	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

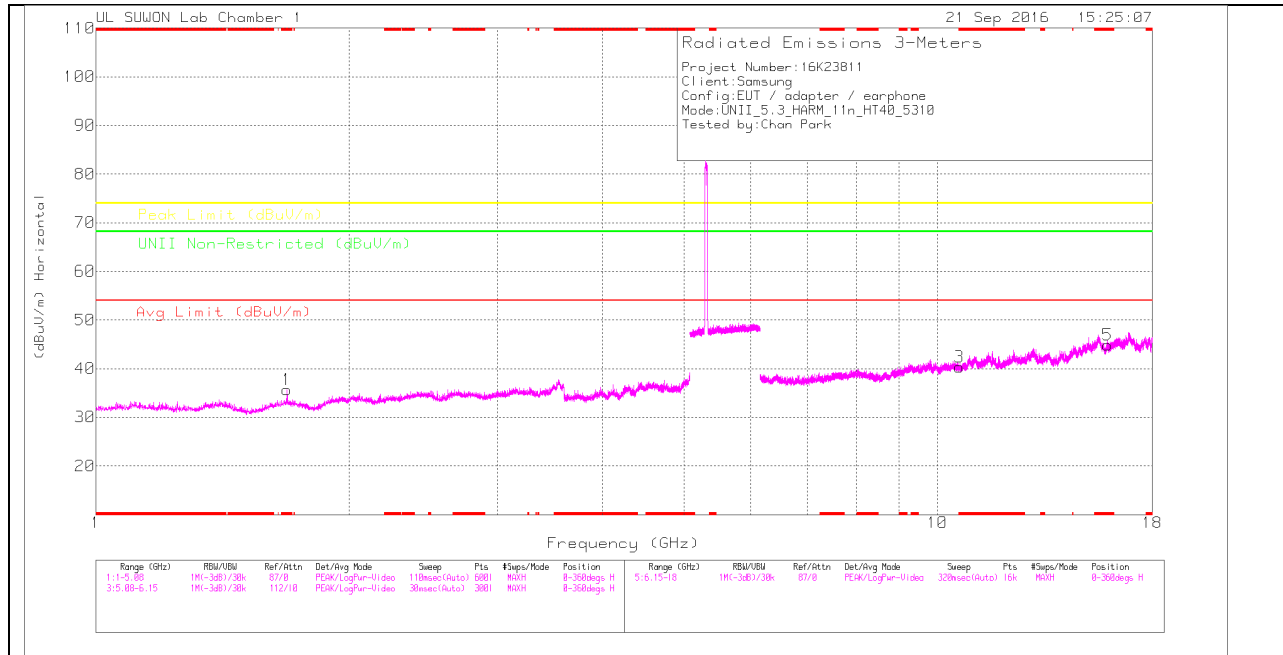

HIGH CHANNEL VERTICAL

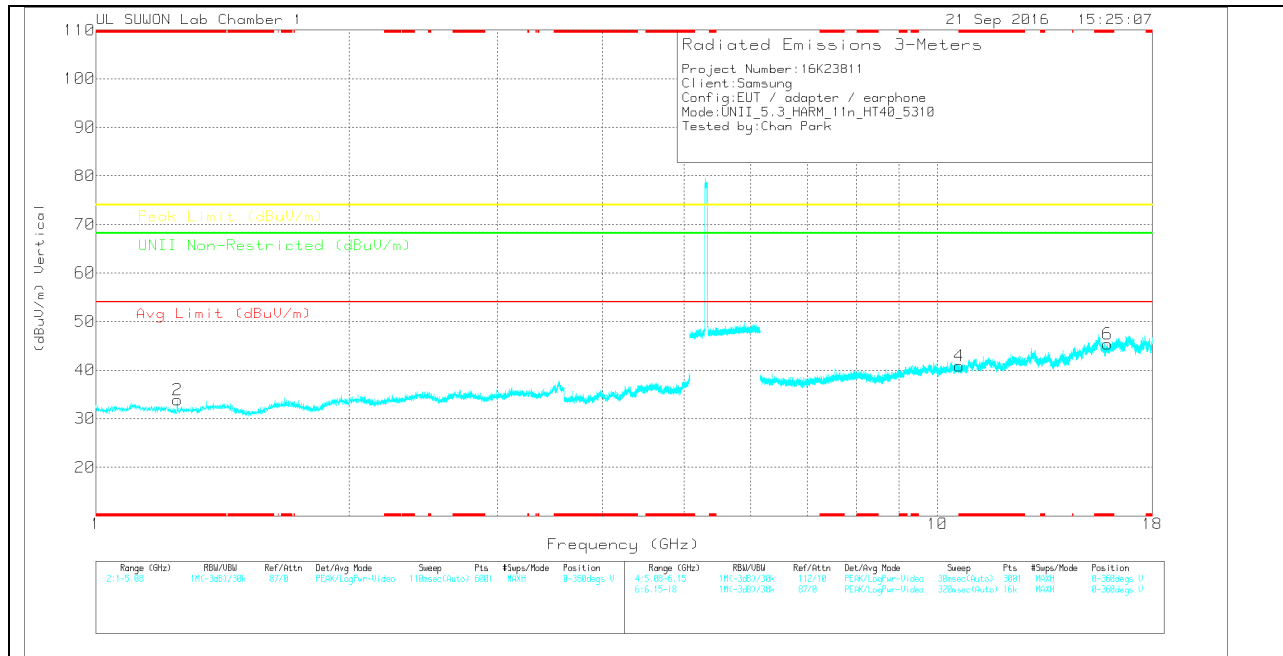

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717), 150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.687	45.71	PK	29.5	-39.5	0	35.71	-	-	74	-38.29	-	-	0-360	150	H
2	* 1.25	45.74	PK	28.3	-40.2	0	33.84	-	-	74	-40.16	-	-	0-360	250	V
3	* 10.622	29.52	PK	37.9	-27.1	0	40.32	-	-	74	-33.68	-	-	0-360	150	H
5	* 15.933	23.68	PK	40.6	-19.4	0	44.88	-	-	74	-29.12	-	-	0-360	250	H
4	* 10.619	30.08	PK	37.9	-27.1	0	40.88	-	-	74	-33.12	-	-	0-360	150	V
6	* 15.935	24.22	PK	40.6	-19.5	0	45.32	-	-	74	-28.68	-	-	0-360	150	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.3GHz BAND RESTRICTED BANDEDGE (High CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

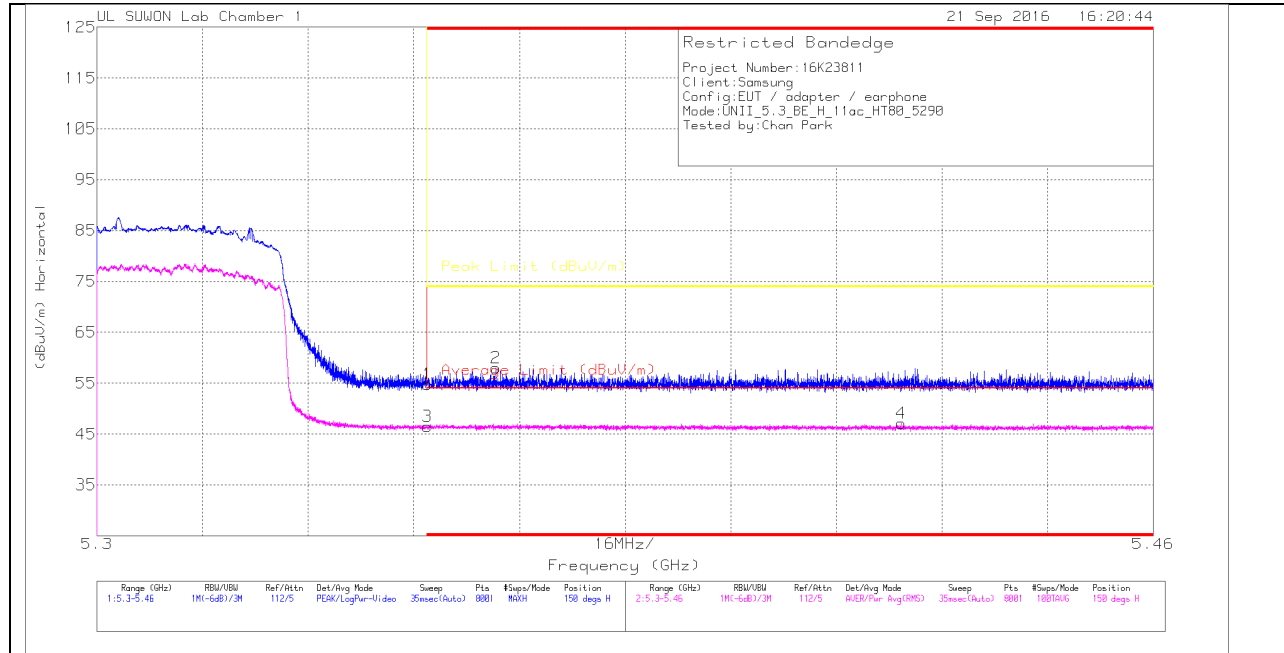

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.6	PK	34.5	-23.3	0	54.8	-	-	74	-19.2	150	104	H
2	* 5.36	46.82	PK	34.5	-23.3	0	58.02	-	-	74	-15.98	150	104	H
3	* 5.35	33.86	RMS	34.5	-23.3	1.48	46.54	54	-7.46	-	-	150	104	H
4	* 5.422	34.19	RMS	34.6	-23.2	1.48	47.07	54	-6.93	-	-	150	104	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

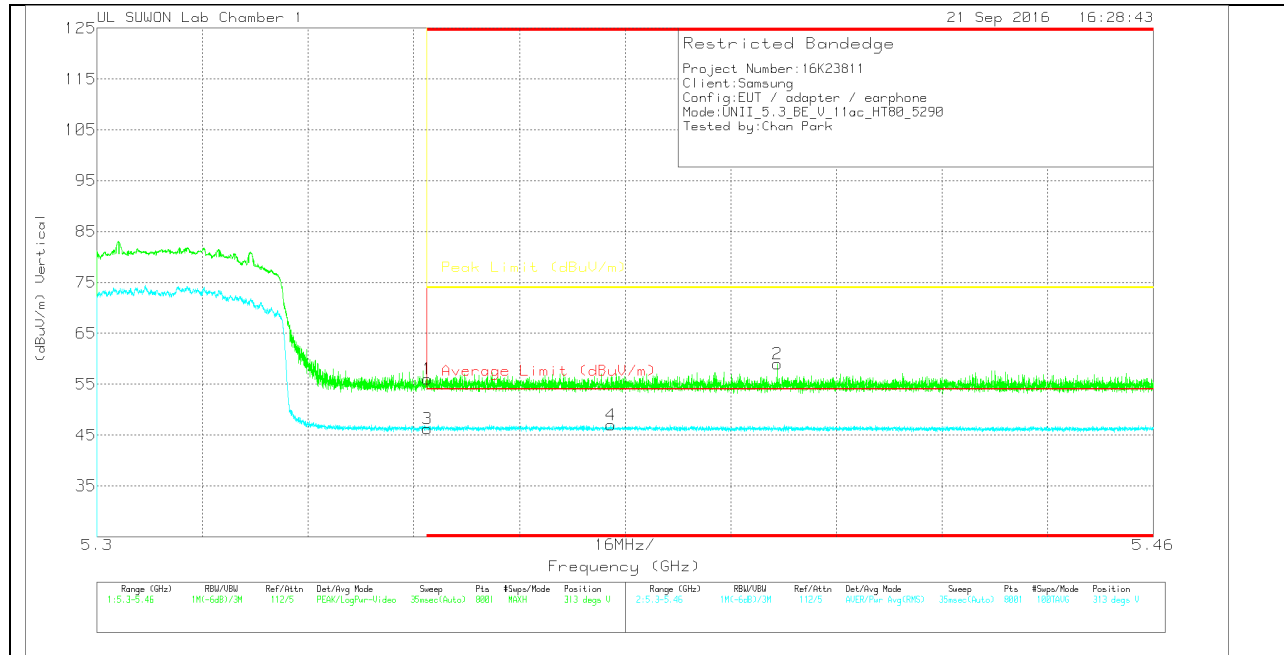

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.81	Pk	34.5	-23.3	0	56.01	-	-	74	-17.99	313	366	V
2	* 5.403	47.66	Pk	34.6	-23.3	0	58.96	-	-	74	-15.04	313	366	V
3	* 5.35	33.52	RMS	34.5	-23.3	1.48	46.2	54	-7.8	-	-	313	366	V
4	* 5.378	34.36	RMS	34.5	-23.3	1.48	47.04	54	-6.96	-	-	313	366	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL HORIZONTAL

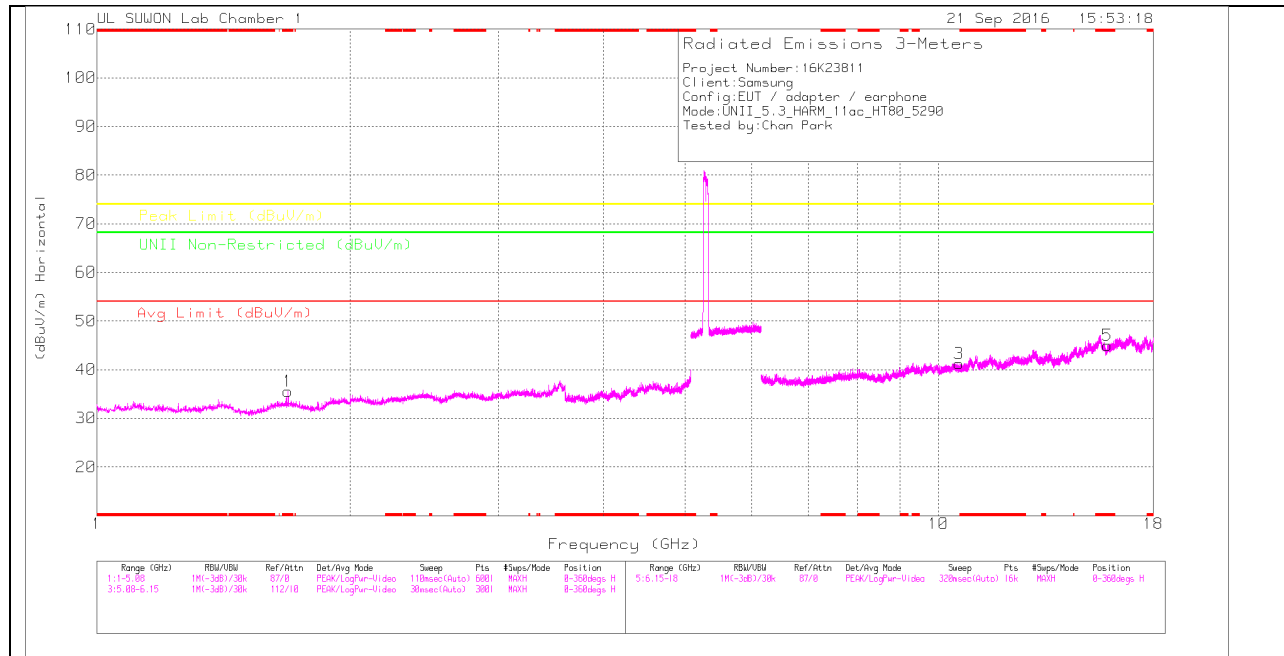

MID CHANNEL VERTICAL

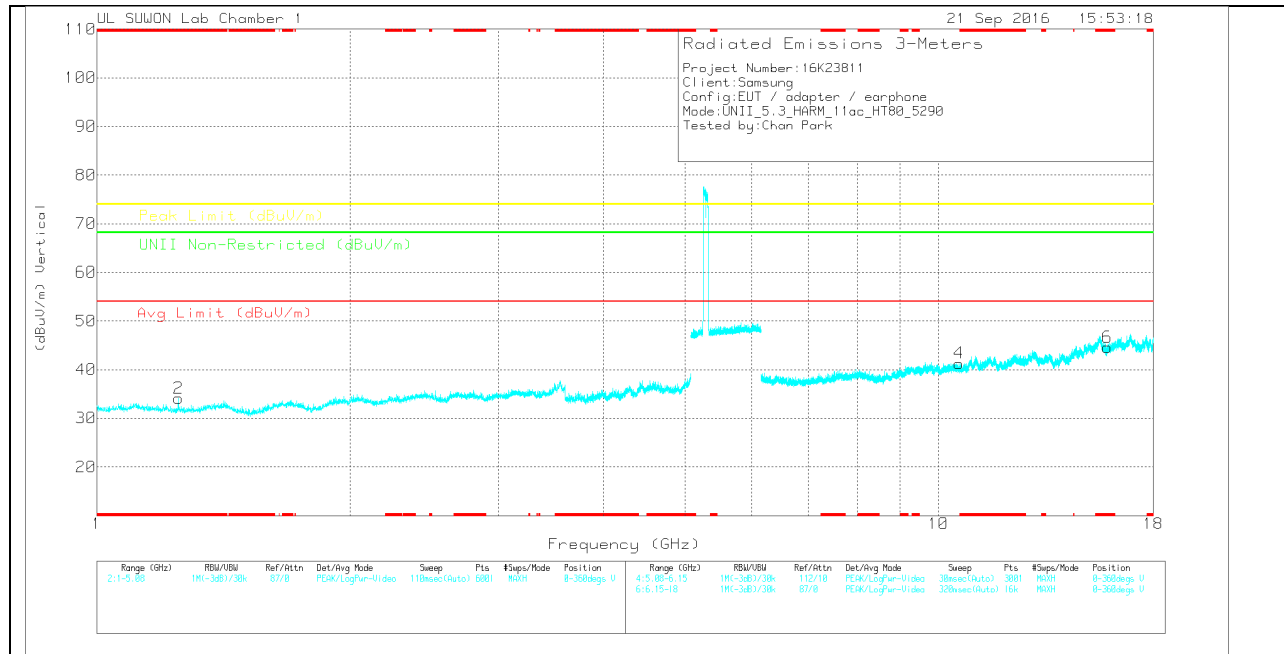

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.687	45.49	PK	29.5	-39.5	0	35.49	-	-	74	-38.51	-	-	0-360	150	H
2	* 1.25	46.01	PK	28.3	-40.2	0	34.11	-	-	74	-39.89	-	-	0-360	250	V
3	10.582	30.18	PK	37.9	-26.8	0	41.28	-	-	-	-	68.2	-26.92	0-360	150	H
5	* 15.874	24.23	PK	40.5	-19.7	0	45.03	-	-	74	-28.97	-	-	0-360	250	H
4	10.58	30.2	PK	37.9	-26.8	0	41.3	-	-	-	-	68.2	-26.9	0-360	250	V
6	* 15.875	23.81	PK	40.5	-19.7	0	44.61	-	-	74	-29.39	-	-	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3. 5.5-5.6 GHz

11.3.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

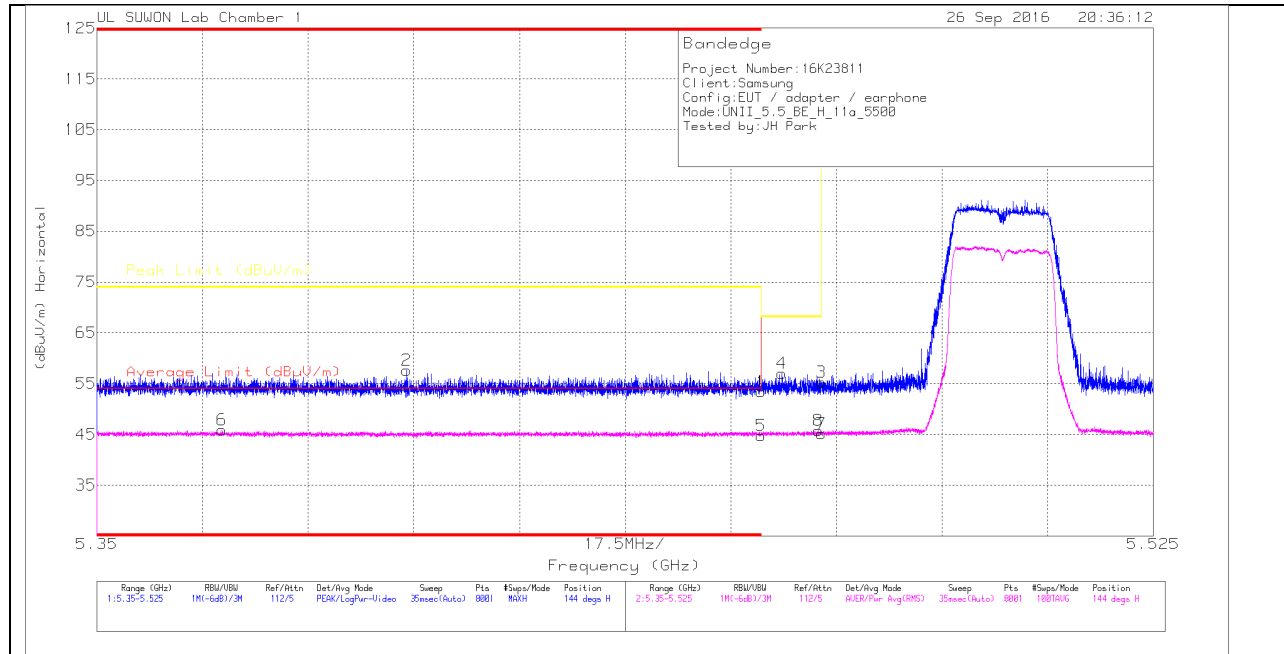

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.05	Pk	34.6	-23.2	0	53.45	-	-	74	-20.55	144	100	H
2	* 5.401	46.32	Pk	34.6	-23.3	0	57.62	-	-	74	-16.38	144	100	H
3	5.47	43.72	Pk	34.6	-23.1	0	55.22	-	-	68.2	-12.98	144	100	H
4	5.464	45.54	Pk	34.6	-23.1	0	57.04	-	-	68.2	-11.16	144	100	H
5	* 5.46	33.09	RMS	34.6	-23.2	.3	44.79	54	-9.21	-	-	144	100	H
6	* 5.371	34.42	RMS	34.5	-23.3	.3	45.92	54	-8.08	-	-	144	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

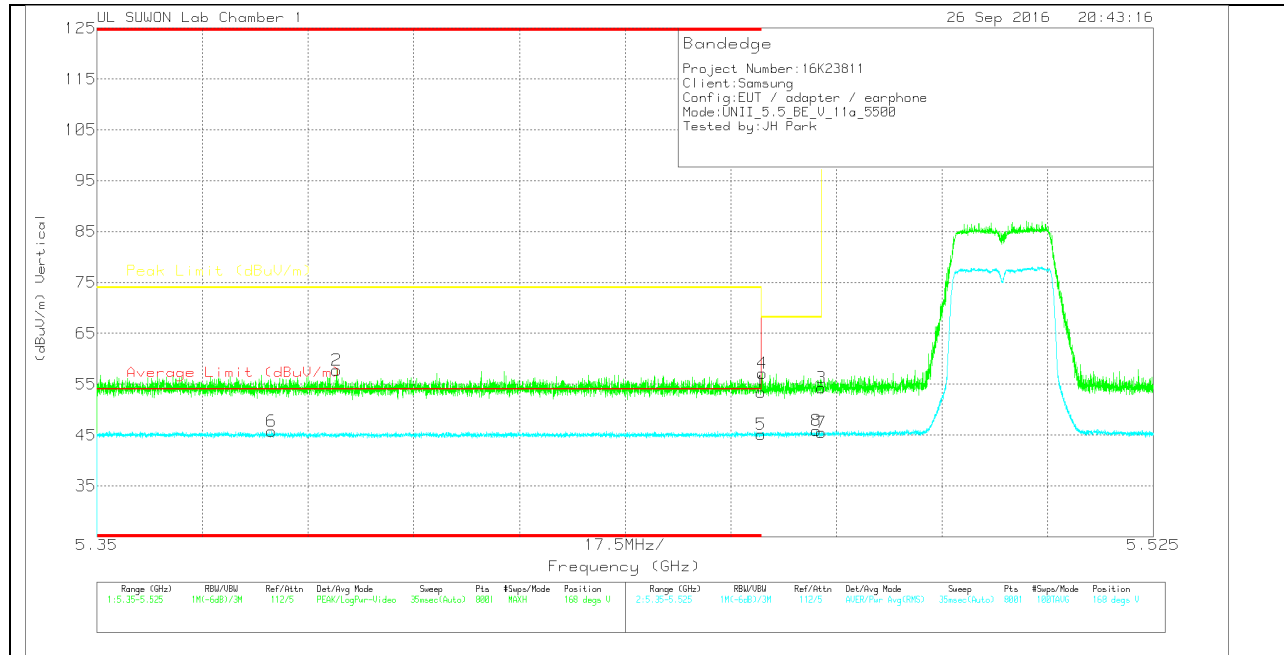

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.08	Pk	34.6	-23.2	0	53.48	-	-	74	-20.52	168	272	V
2	* 5.39	46.54	Pk	34.5	-23.3	0	57.74	-	-	74	-16.26	168	272	V
3	5.47	42.73	Pk	34.6	-23.1	0	54.23	-	-	68.2	-13.97	168	272	V
4	5.46	45.69	Pk	34.6	-23.2	0	57.09	-	-	68.2	-11.11	168	272	V
5	* 5.46	33.39	RMS	34.6	-23.2	.3	45.09	54	-8.91	-	-	168	272	V
6	* 5.379	34.29	RMS	34.5	-23.3	.3	45.79	54	-8.21	-	-	168	272	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

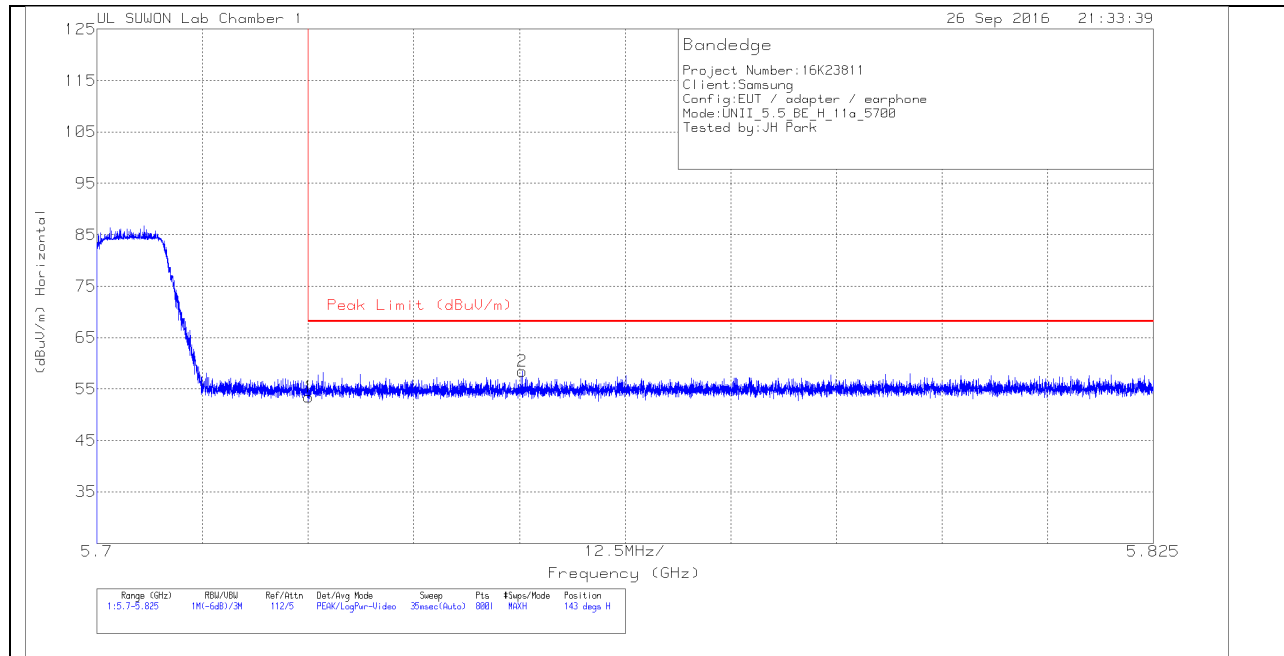


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.51	Pk	34.8	-22.8	0	53.51	68.2	-14.69	143	130	H
2	5.75	46.36	Pk	34.8	-22.7	0	58.46	68.2	-9.74	143	130	H

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

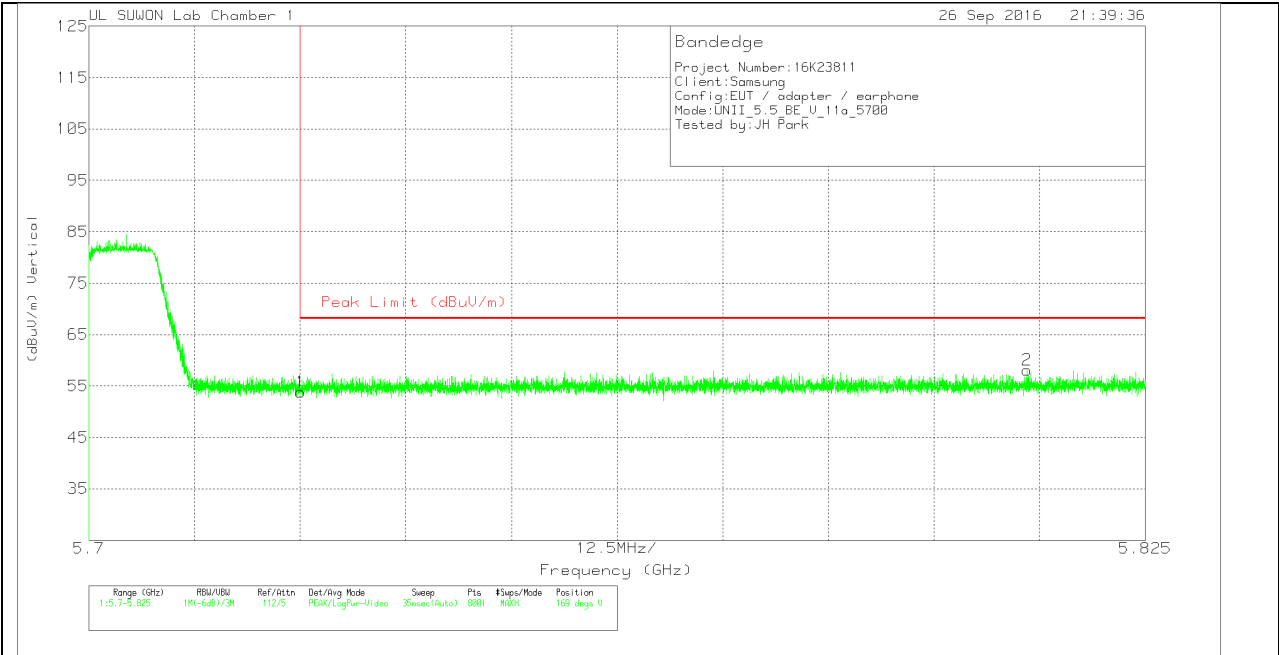

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.8	Pk	34.8	-22.8	0	53.8	68.2	-14.4	169	286	V
2	5.811	45.73	Pk	34.8	-22.4	0	58.13	68.2	-10.07	169	286	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

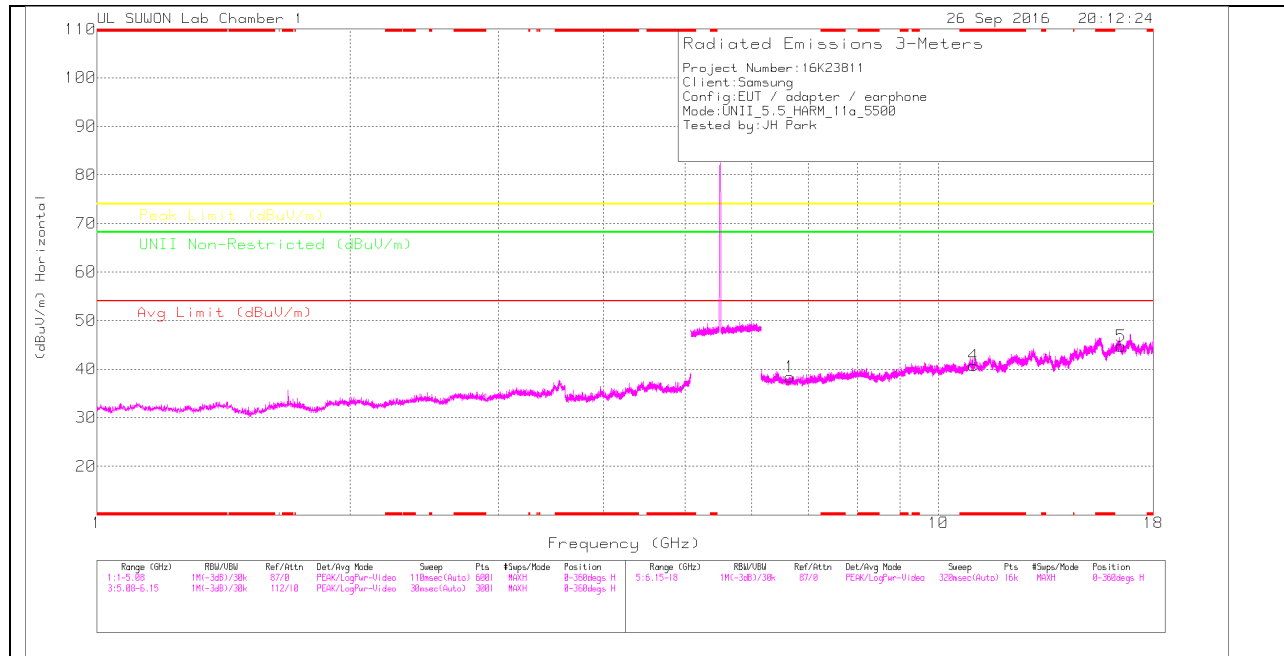

LOW CHANNEL VERTICAL

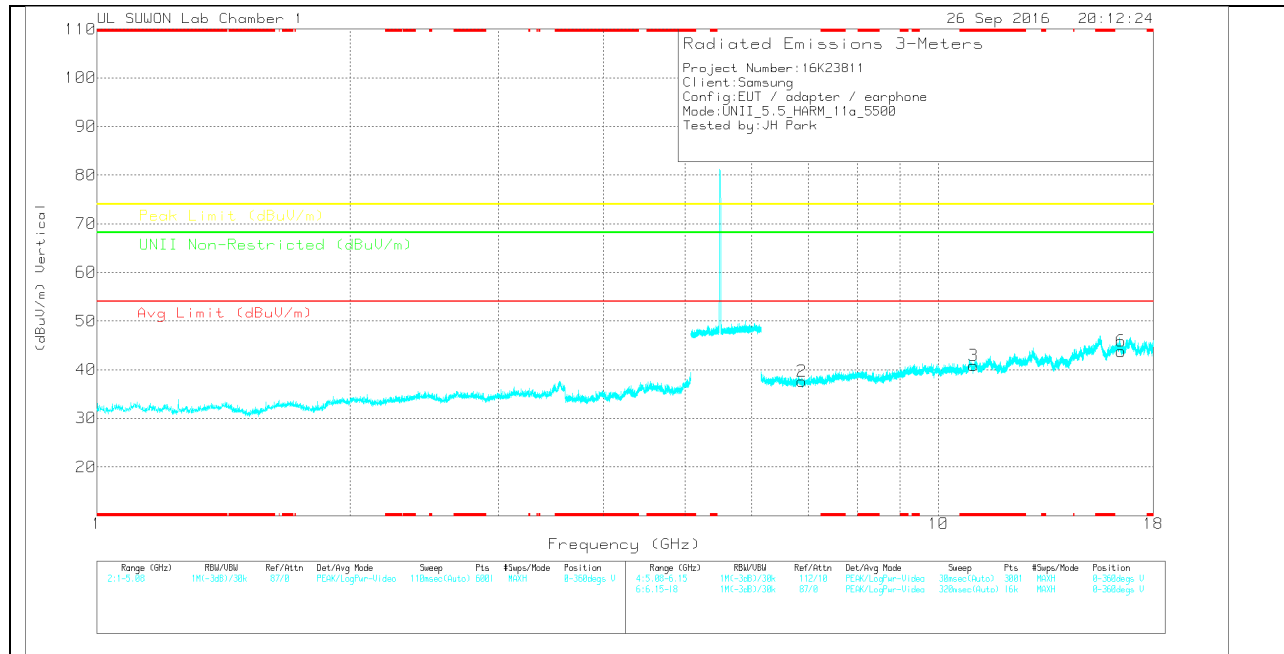

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717) 150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.66	33.59	PK	35.5	-30.7	0	38.39	-	-	-	-	68.2	-29.81	0-360	150	H
4	* 11.004	29.9	PK	38.2	-27.4	0	40.7	-	-	74	-33.3	-	-	0-360	150	H
5	16.493	25.82	PK	41.1	-22.2	0	44.72	-	-	-	-	68.2	-23.48	0-360	150	H
2	6.882	32.86	PK	35.6	-30.8	0	37.66	-	-	-	-	68.2	-30.54	0-360	150	V
3	* 11.011	29.91	PK	38.2	-27.3	0	40.81	-	-	74	-33.19	-	-	0-360	250	V
6	16.497	24.86	PK	41.1	-22.2	0	43.76	-	-	-	-	68.2	-24.44	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

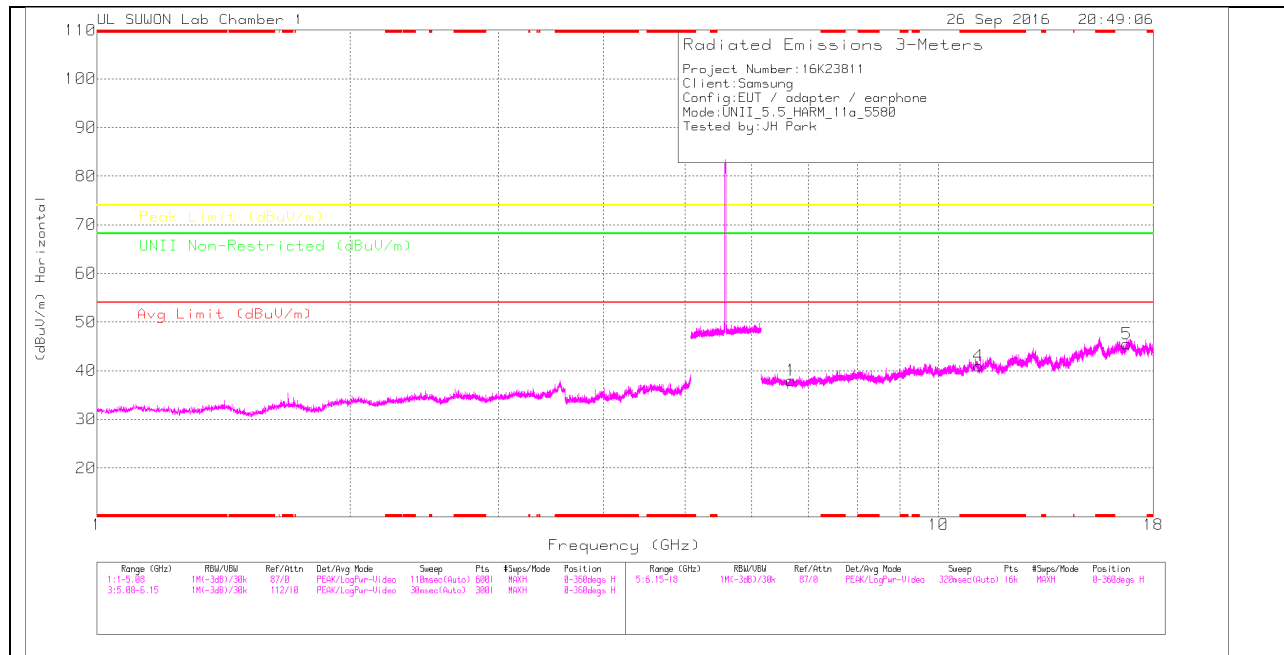

MID CHANNEL VERTICAL

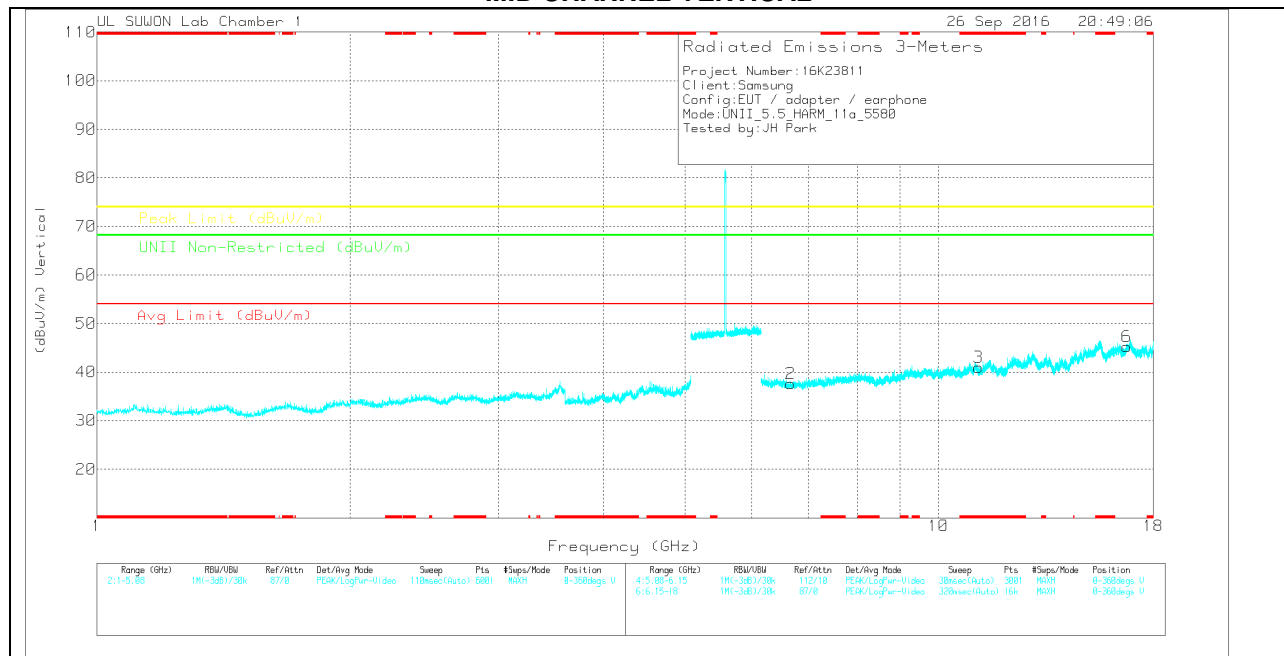

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.684	33.18	PK	35.5	-30.7	0	37.98	-	-	-	-	68.2	-30.22	0-360	250	H
4	* 11.166	29.76	PK	38.3	-27.1	0	40.96	-	-	74	-33.04	-	-	0-360	150	H
5	16.743	25.41	PK	41.3	-21.2	0	45.51	-	-	-	-	68.2	-22.69	0-360	250	H
2	6.673	32.87	PK	35.5	-30.7	0	37.67	-	-	-	-	68.2	-30.53	0-360	250	V
3	* 11.159	29.72	PK	38.3	-27.1	0	40.92	-	-	74	-33.08	-	-	0-360	150	V
6	16.741	25.18	PK	41.3	-21.2	0	45.28	-	-	-	-	68.2	-22.92	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

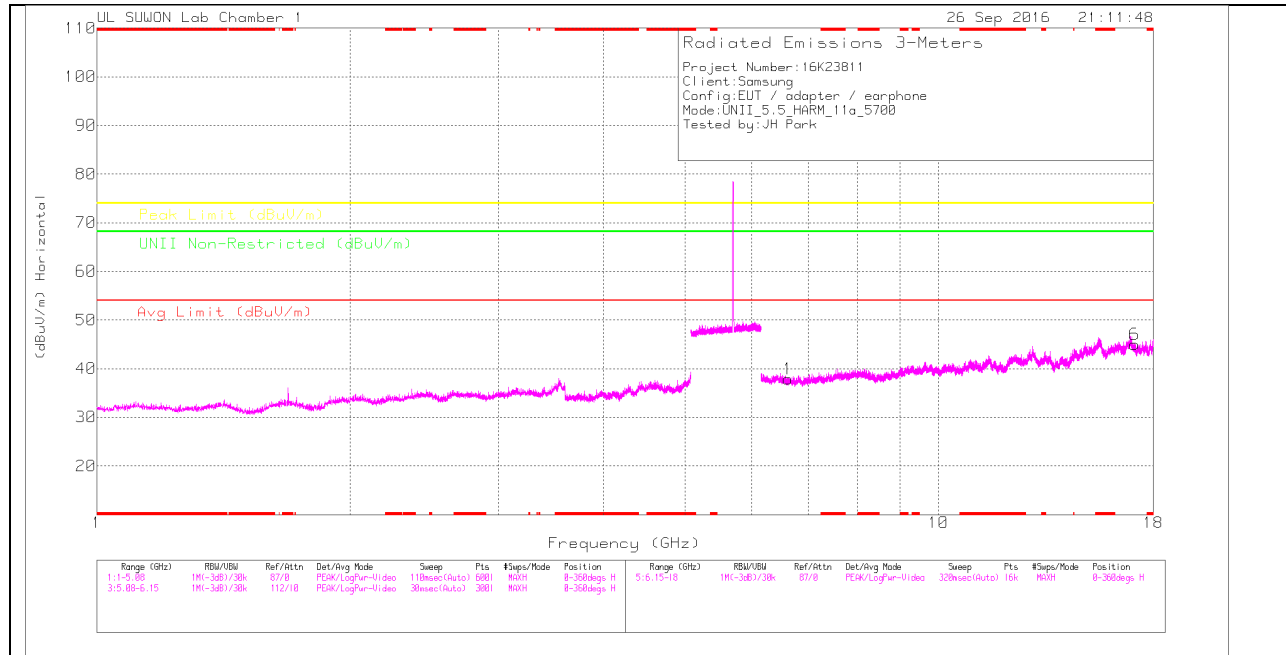

HIGH CHANNEL VERTICAL

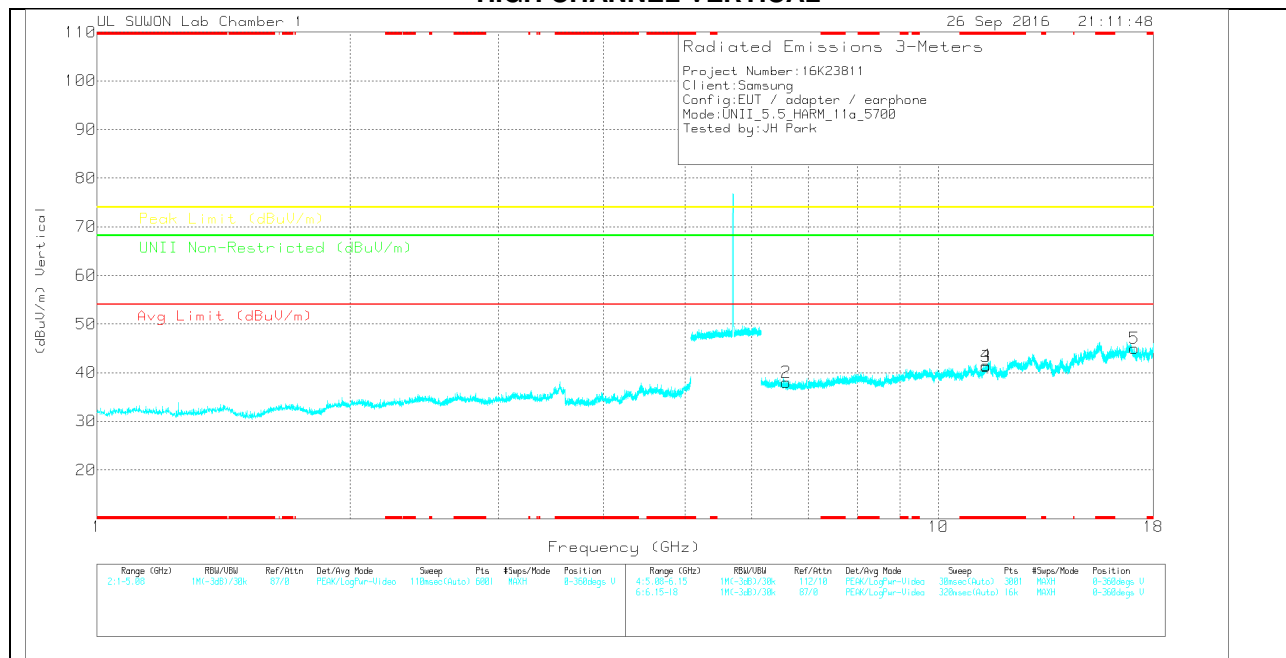

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717/150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.63	33.2	PK	35.5	-30.8	0	37.9	-	-	-	-	68.2	-30.3	0-360	150	H
6	17.105	25.18	PK	41.3	-21.5	0	44.98	-	-	-	-	68.2	-23.22	0-360	250	H
2	6.595	33.01	PK	35.5	-30.5	0	38.01	-	-	-	-	68.2	-30.19	0-360	250	V
3	* 11.399	30.04	PK	38.5	-27.3	0	41.24	-	-	74	-32.76	-	-	0-360	250	V
4	* 11.396	30.17	PK	38.5	-27.2	0	41.47	-	-	74	-32.53	-	-	0-360	250	V
5	17.102	25.15	PK	41.3	-21.5	0	44.95	-	-	-	-	68.2	-23.25	0-360	250	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

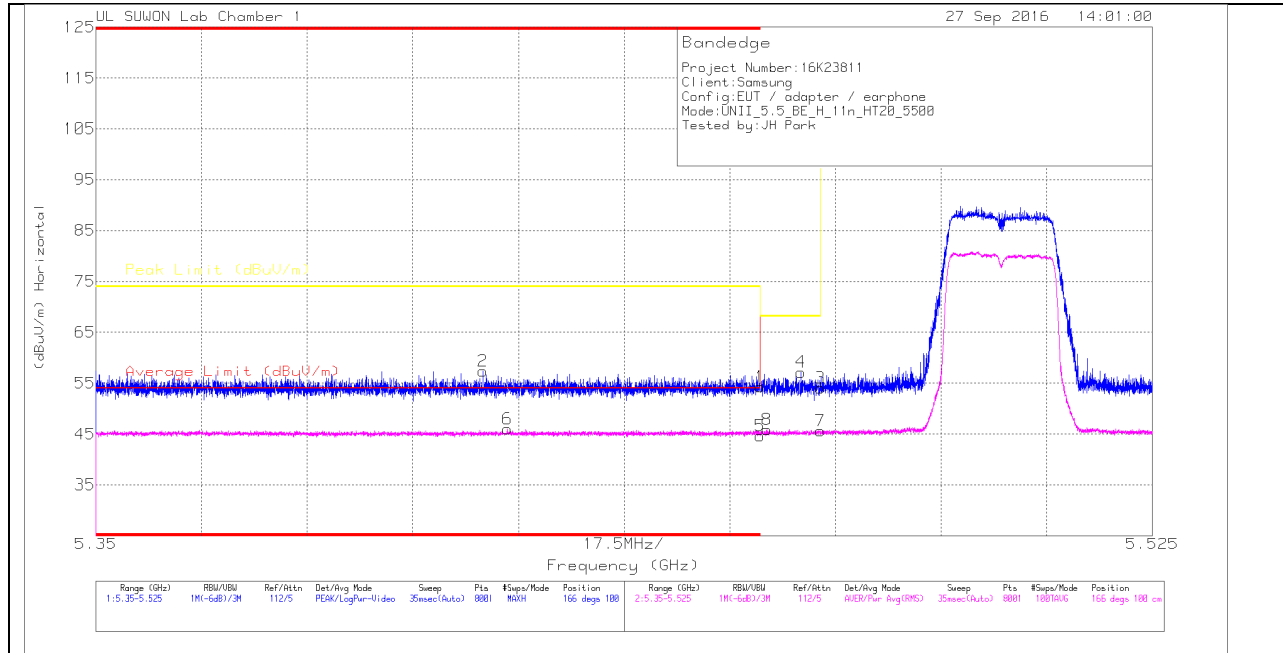

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.91	Pk	34.6	-23.2	0	54.31	-	-	74	-19.69	166	100	H
2	* 5.414	46.07	Pk	34.6	-23.3	0	57.37	-	-	74	-16.63	166	100	H
3	5.47	42.57	Pk	34.6	-23.1	0	54.07	-	-	68.2	-14.13	166	100	H
4	5.467	45.69	Pk	34.6	-23.1	0	57.19	-	-	68.2	-11.01	166	100	H
5	* 5.46	32.95	RMS	34.6	-23.2	.32	44.67	54	-9.33	-	-	166	100	H
6	* 5.418	34.39	RMS	34.6	-23.3	.32	46.01	54	-7.99	-	-	166	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

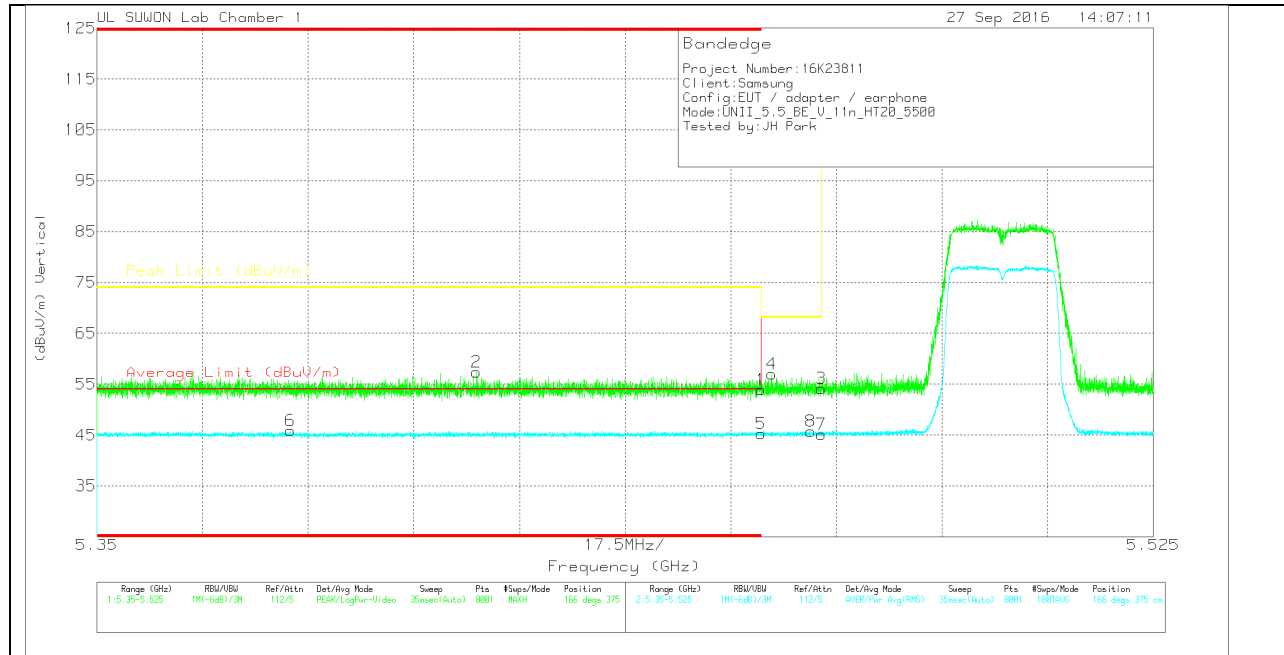

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.46	Pk	34.6	-23.2	0	53.86	-	-	74	-20.14	166	375	V
2	* 5.413	46.07	Pk	34.6	-23.3	0	57.37	-	-	74	-16.63	166	375	V
3	5.47	42.65	Pk	34.6	-23.1	0	54.15	-	-	68.2	-14.05	166	375	V
4	5.462	45.65	Pk	34.6	-23.2	0	57.05	-	-	68.2	-11.15	166	375	V
5	* 5.46	33.49	RMS	34.6	-23.2	.32	45.21	54	-8.79	-	-	166	375	V
6	* 5.382	34.34	RMS	34.5	-23.3	.32	45.86	54	-8.14	-	-	166	375	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

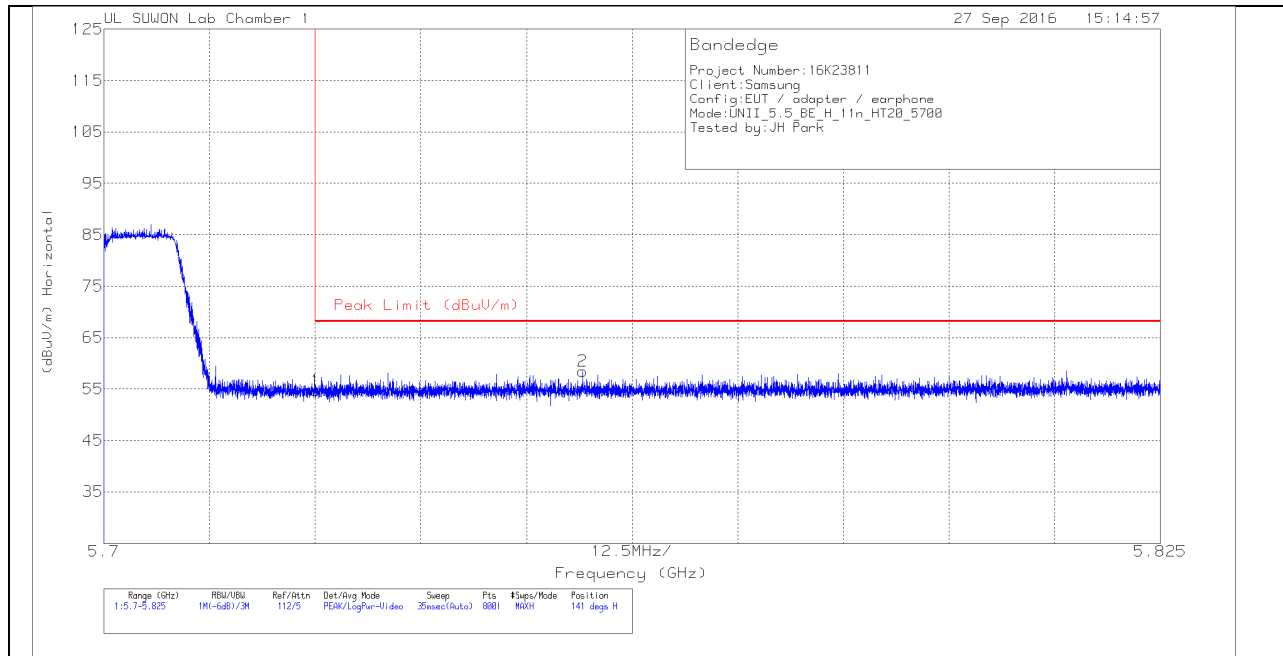


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.63	Pk	34.8	-22.8	0	54.63	68.2	-13.57	141	100	H
2	5.757	46.4	Pk	34.8	-22.7	0	58.5	68.2	-9.7	141	100	H

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

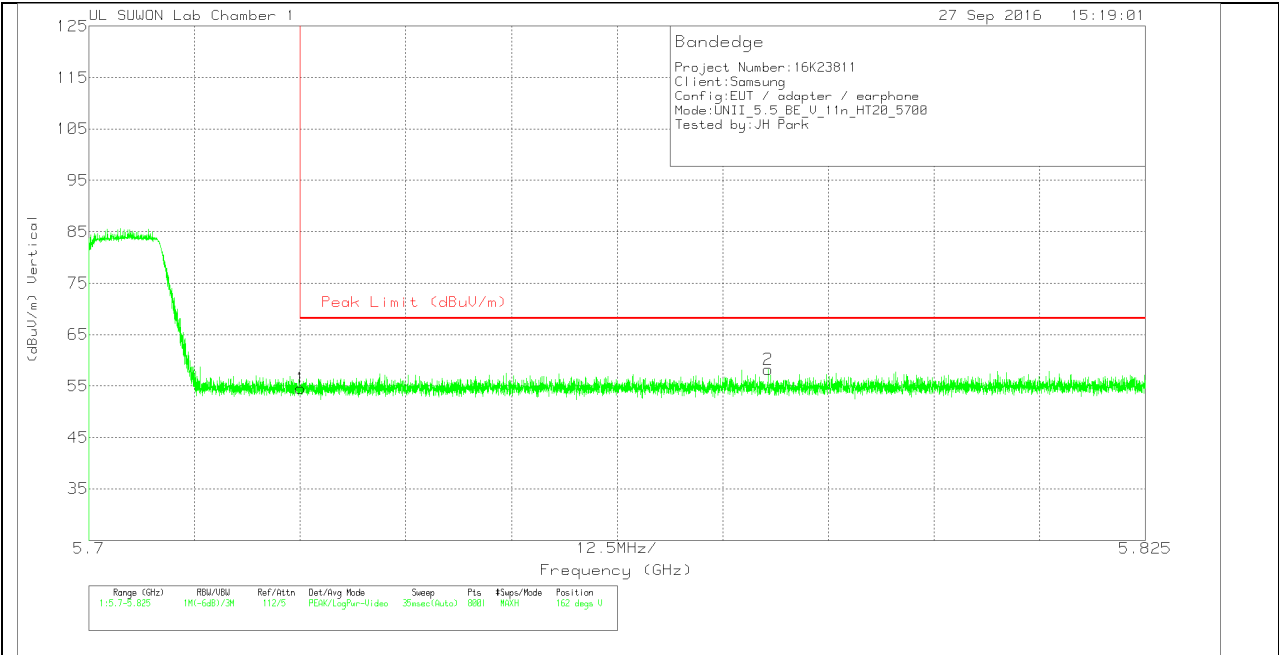

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.54	Pk	34.8	-22.8	0	54.54	68.2	-13.66	162	345	V
2	5.78	46.08	Pk	34.8	-22.7	0	58.18	68.2	-10.02	162	345	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

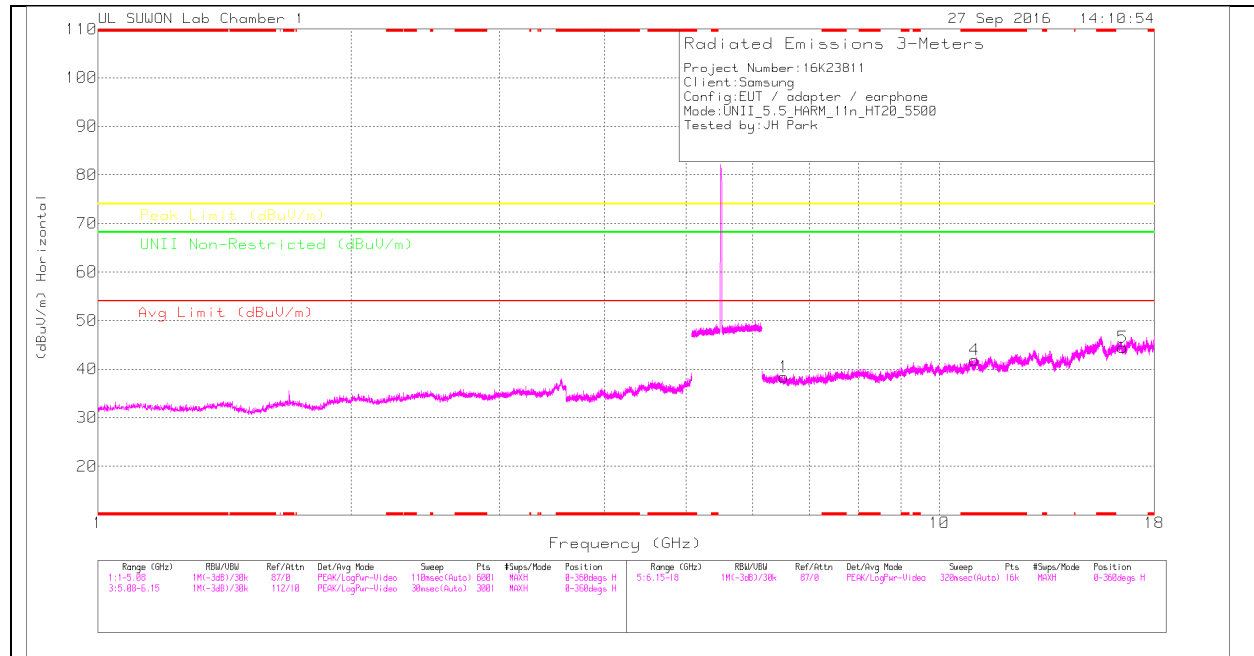

LOW CHANNEL VERTICAL

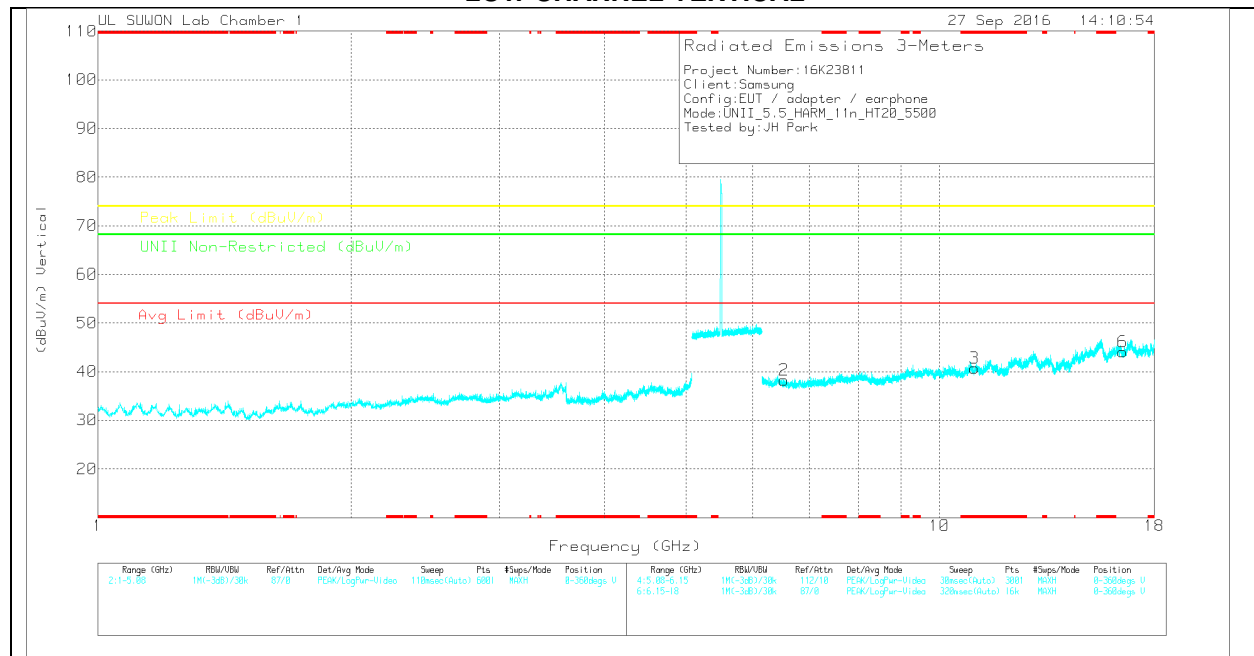

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717/150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.539	33.56	PK	35.5	-30.7	0	38.36	-	-	-	-	68.2	-29.84	0-360	150	H
4	* 11.005	31.08	PK	38.2	-27.4	0	41.88	-	-	74	-32.12	-	-	0-360	150	H
5	16.501	25.57	PK	41.1	-22.2	0	44.47	-	-	-	-	68.2	-23.73	0-360	150	H
2	6.535	33.5	PK	35.4	-30.7	0	38.2	-	-	-	-	68.2	-30	0-360	150	V
3	* 11	29.95	PK	38.2	-27.4	0	40.75	-	-	74	-33.25	-	-	0-360	250	V
6	16.505	25.13	PK	41.1	-22.2	0	44.03	-	-	-	-	68.2	-24.17	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

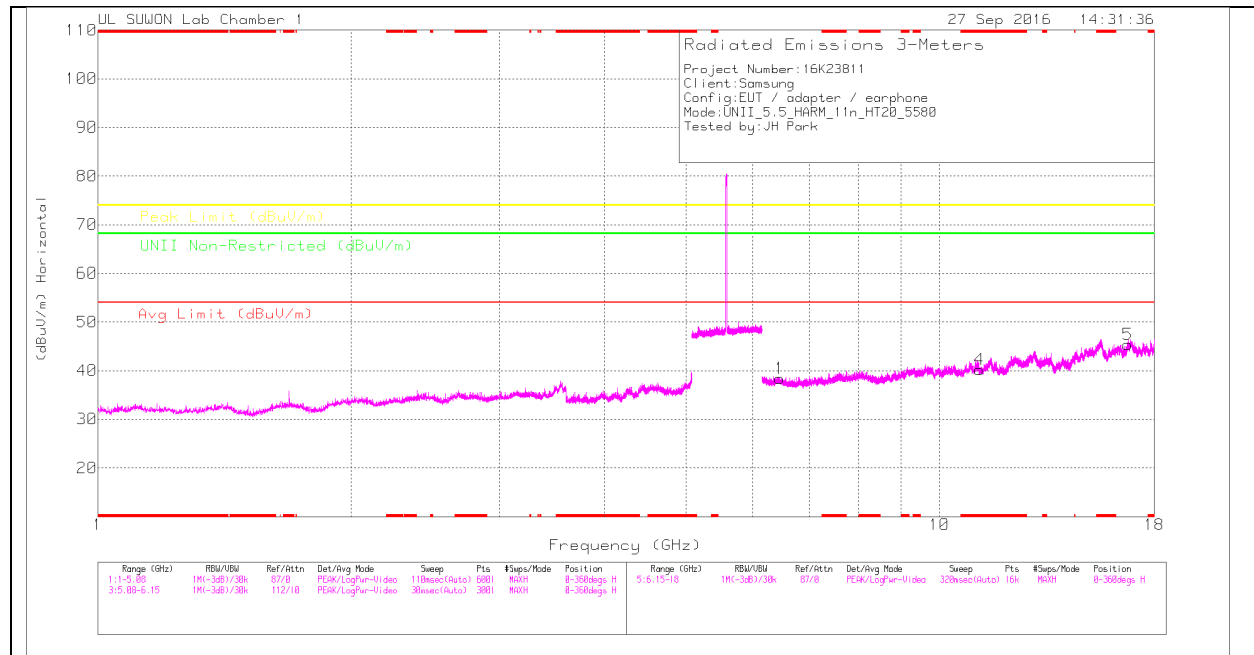

MID CHANNEL VERTICAL

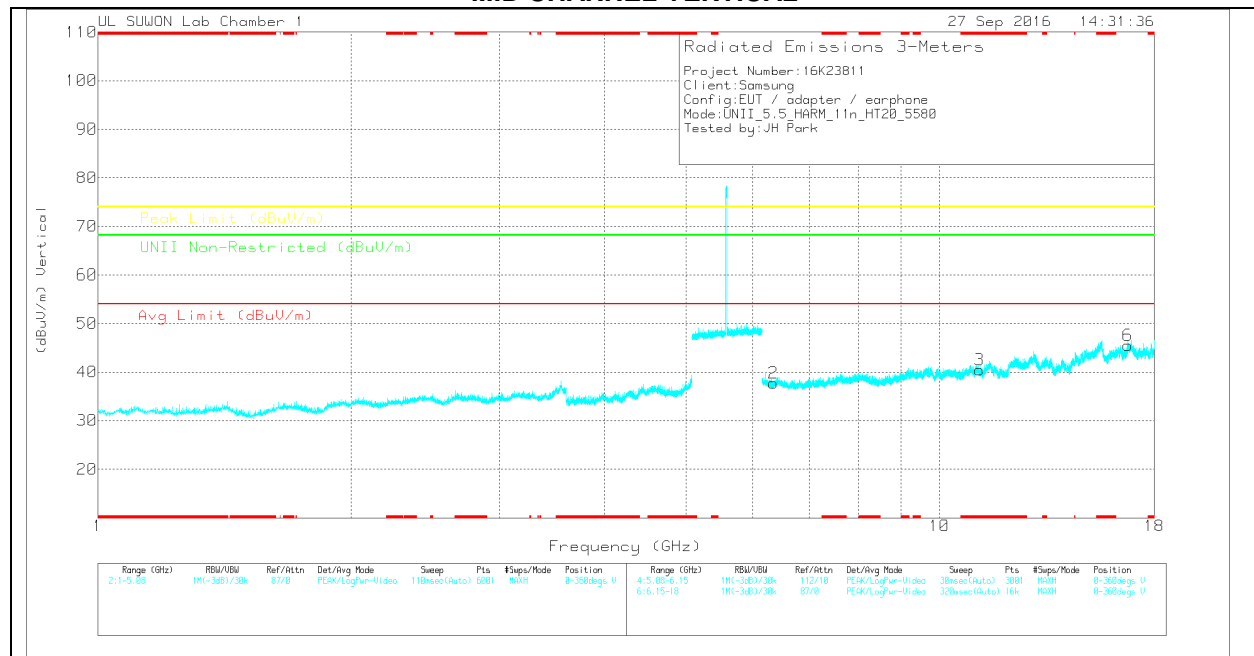

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.456	33.16	PK	35.4	-30.2	0	38.36	-	-	-	-	68.2	-29.84	0-360	150	H
4	* 11.16	29.05	PK	38.3	-27.1	0	40.25	-	-	74	-33.75	-	-	0-360	150	H
5	16.739	25.32	PK	41.2	-21.2	0	45.32	-	-	-	-	68.2	-22.88	0-360	250	H
2	6.351	33.37	PK	35.3	-30.9	0	37.77	-	-	-	-	68.2	-30.43	0-360	250	V
3	* 11.161	29.23	PK	38.3	-27.1	0	40.43	-	-	74	-33.57	-	-	0-360	250	V
6	16.74	25.36	PK	41.3	-21.2	0	45.46	-	-	-	-	68.2	-22.74	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

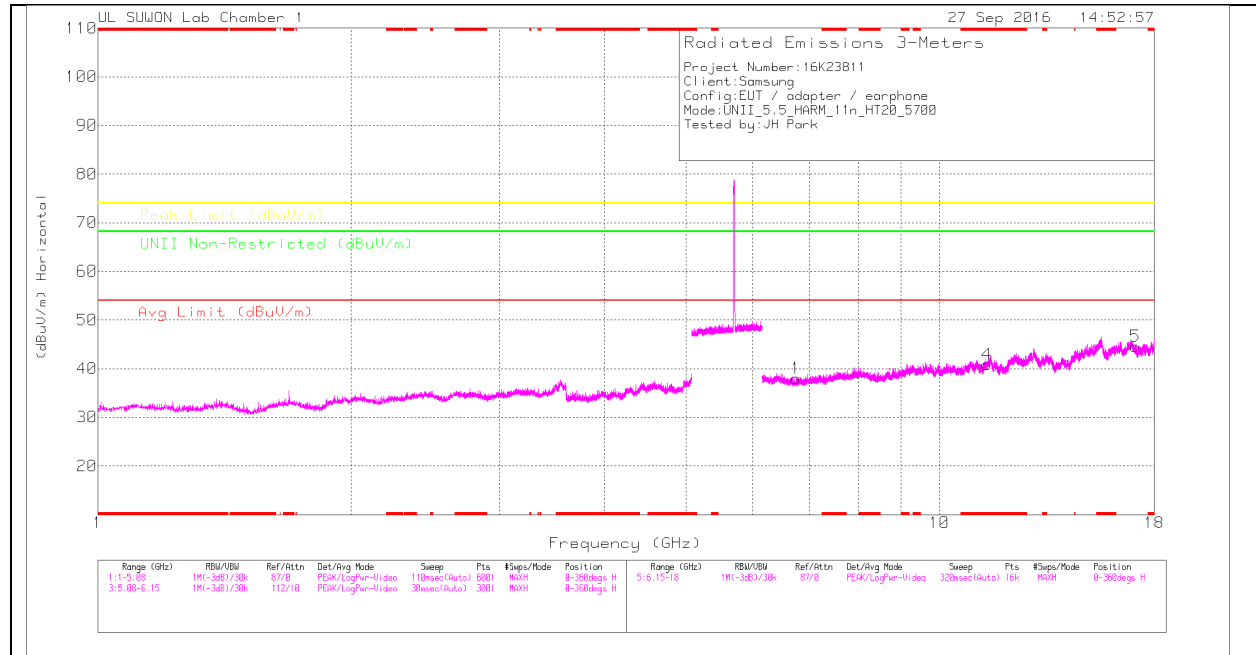

HIGH CHANNEL VERTICAL

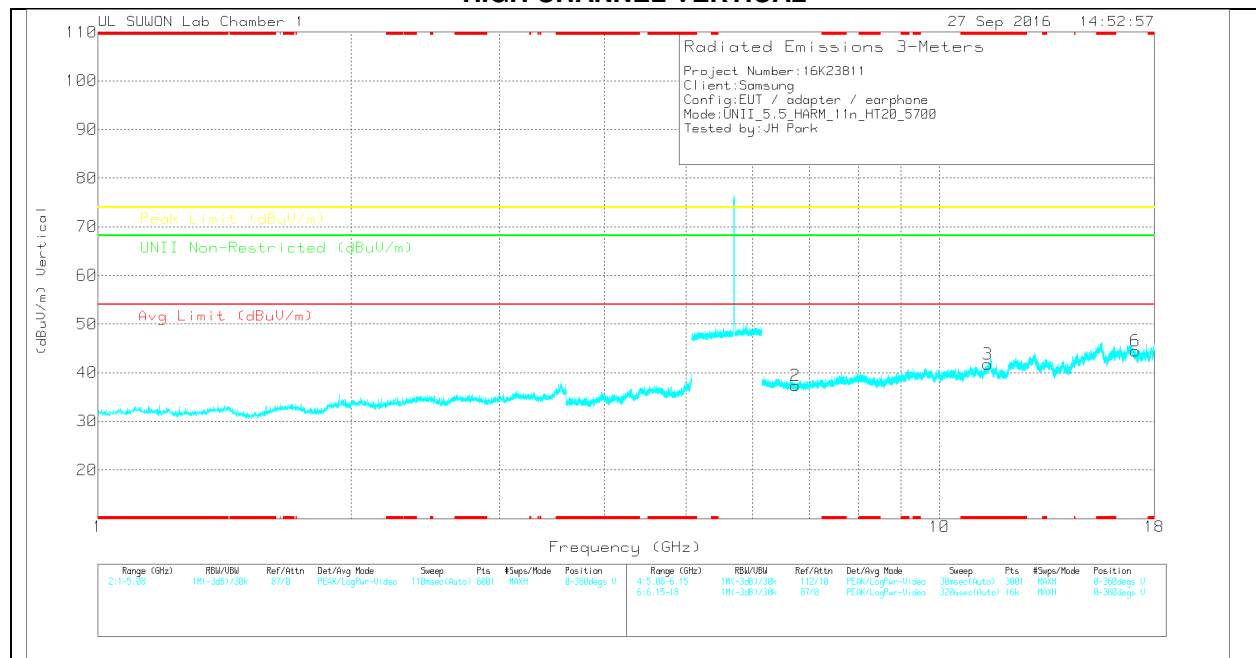

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717/150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.756	33.25	PK	35.6	-30.8	0	38.05	-	-	-	-	68.2	-30.15	0-360	250	H
4	* 11.392	29.59	PK	38.5	-27.2	0	40.89	-	-	74	-33.11	-	-	0-360	250	H
5	17.098	24.66	PK	41.3	-21.4	0	44.56	-	-	-	-	68.2	-23.64	0-360	150	H
2	6.743	32.64	PK	35.6	-30.9	0	37.34	-	-	-	-	68.2	-30.86	0-360	250	V
3	* 11.405	30.52	PK	38.5	-27.3	0	41.72	-	-	74	-32.28	-	-	0-360	250	V
6	17.101	24.62	PK	41.3	-21.5	0	44.42	-	-	-	-	68.2	-23.78	0-360	150	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

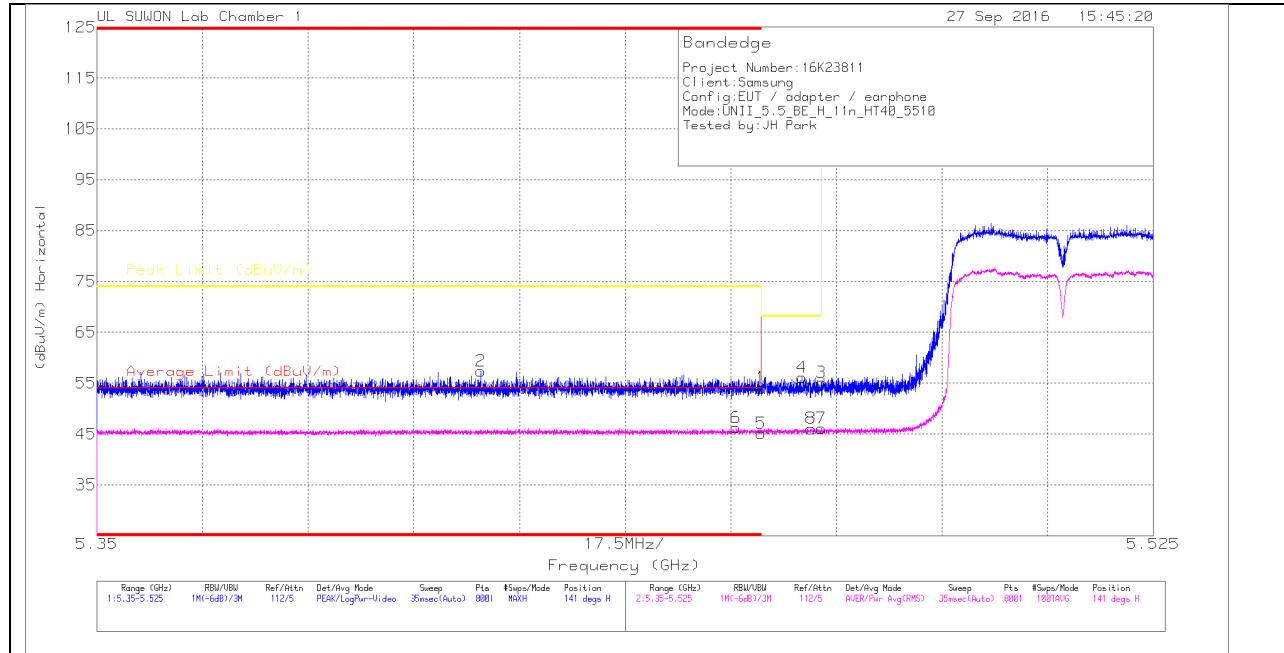

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.7	Pk	34.6	-23.2	0	54.1	-	-	74	-19.9	141	100	H
2	* 5.414	46.04	Pk	34.6	-23.3	0	57.34	-	-	74	-16.66	141	100	H
3	5.47	43.64	Pk	34.6	-23.1	0	55.14	-	-	68.2	-13.06	141	100	H
4	5.467	44.67	Pk	34.6	-23.1	0	56.17	-	-	68.2	-12.03	141	100	H
5	* 5.46	33.09	RMS	34.6	-23.2	.63	45.12	54	-8.88	-	-	141	100	H
6	* 5.456	34.24	RMS	34.6	-23.2	.63	46.27	54	-7.73	-	-	141	100	H
7	5.47	34.02	RMS	34.6	-23.1	.63	46.15	-	-	-	-	141	100	H
8	5.468	33.93	RMS	34.6	-23.1	.63	46.06	-	-	-	-	141	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

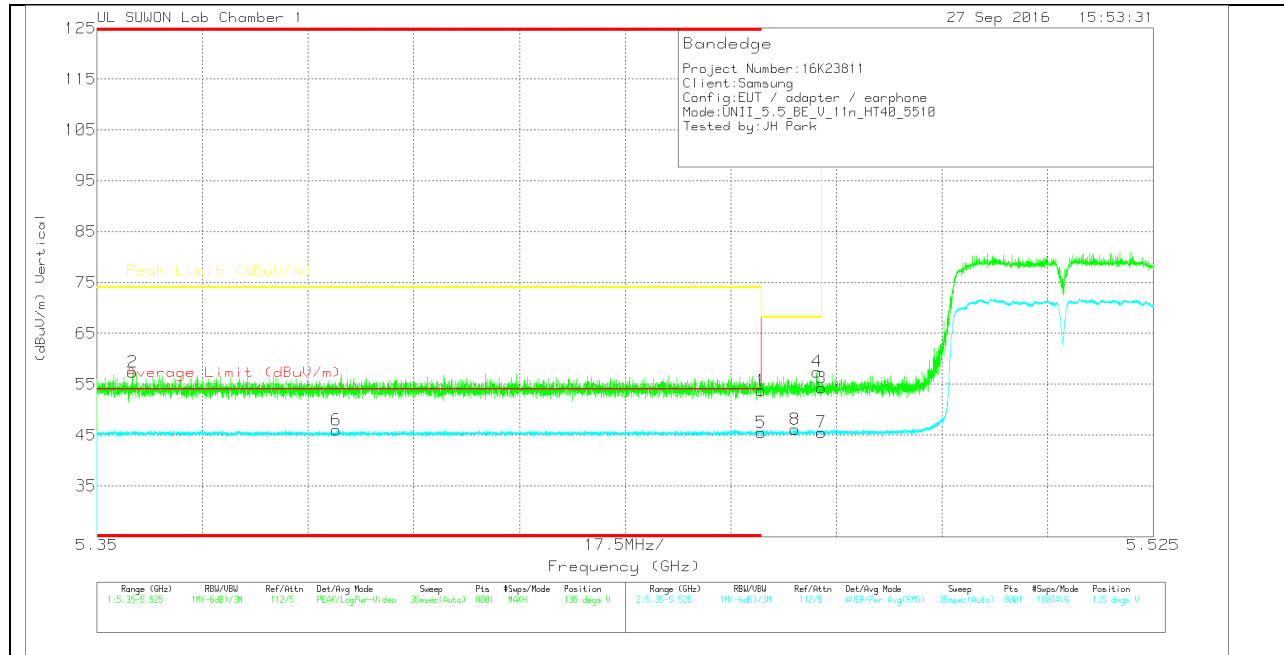

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.35	Pk	34.6	-23.2	0	53.75	-	-	74	-20.25	135	100	V
2	* 5.356	46.14	Pk	34.5	-23.3	0	57.34	-	-	74	-16.66	135	100	V
3	5.47	42.75	Pk	34.6	-23.1	0	54.25	-	-	68.2	-13.95	135	100	V
4	5.469	45.94	Pk	34.6	-23.1	0	57.44	-	-	68.2	-10.76	135	100	V
5	* 5.46	33.51	RMS	34.6	-23.2	.63	45.54	54	-8.46	-	-	135	100	V
6	* 5.39	34.21	RMS	34.5	-23.3	.63	46.04	54	-7.96	-	-	135	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

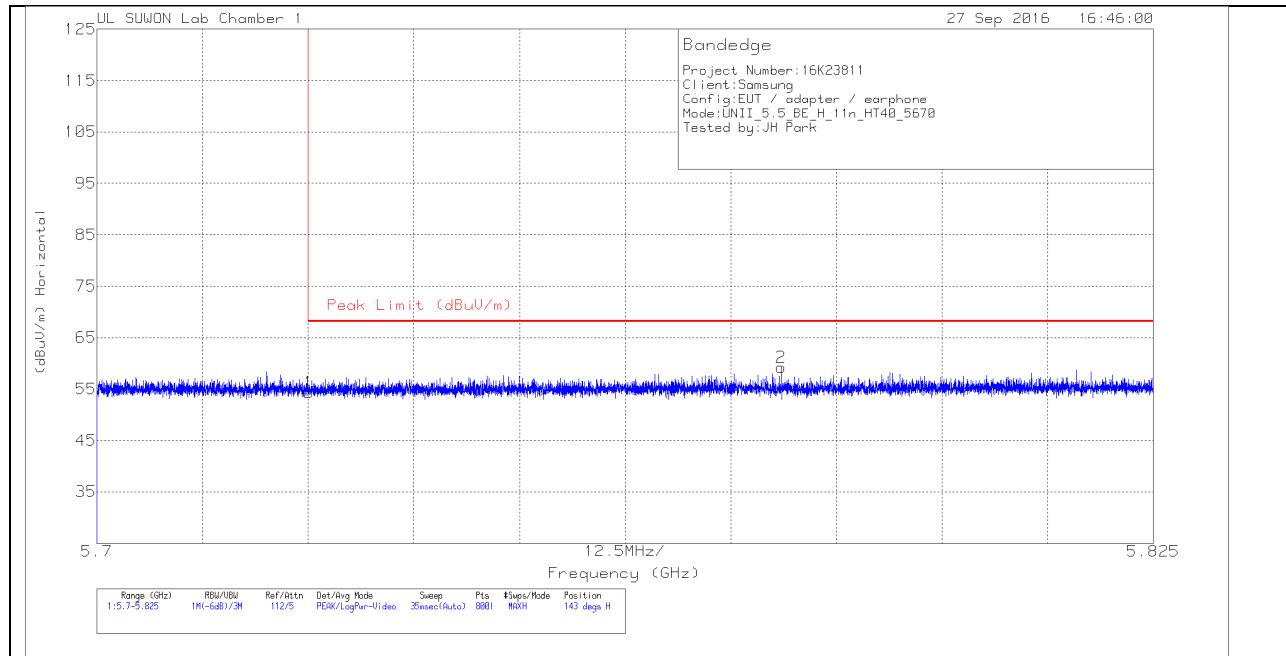


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.27	Pk	34.8	-22.8	0	54.27	68.2	-13.93	143	100	H
2	5.781	47.06	Pk	34.8	-22.7	0	59.16	68.2	-9.04	143	100	H

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

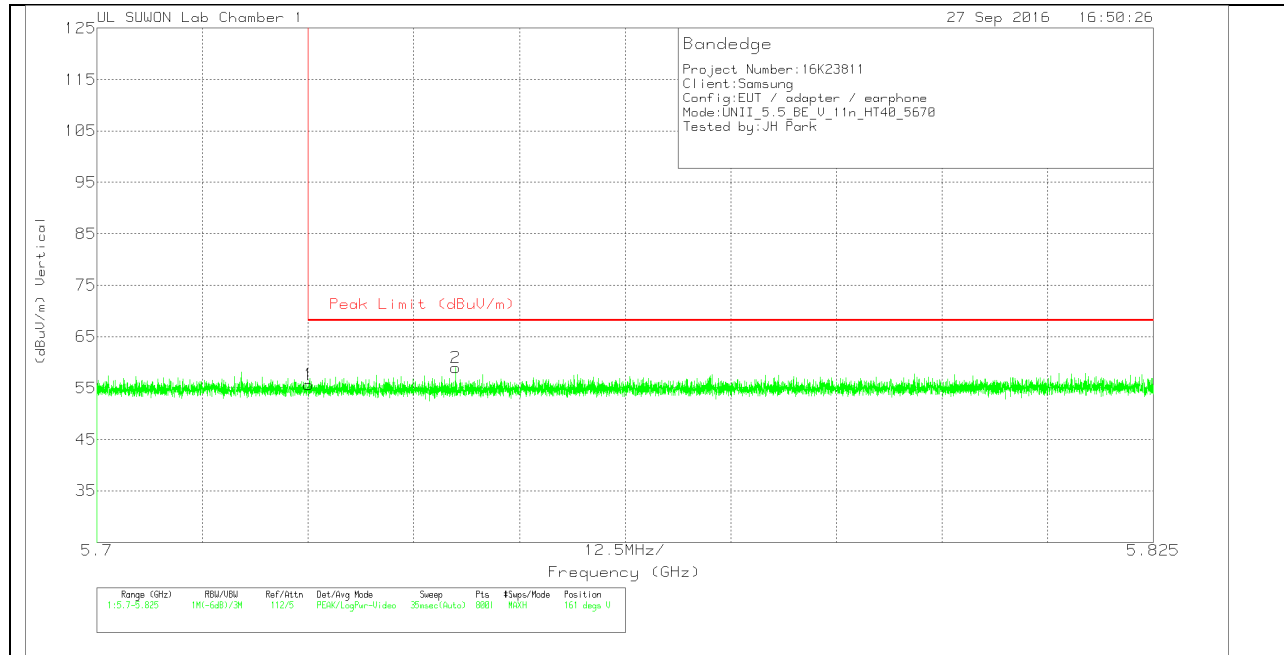

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.62	Pk	34.8	-22.8	0	55.62	68.2	-12.58	161	334	V
2	5.742	46.92	Pk	34.8	-22.8	0	58.92	68.2	-9.28	161	334	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

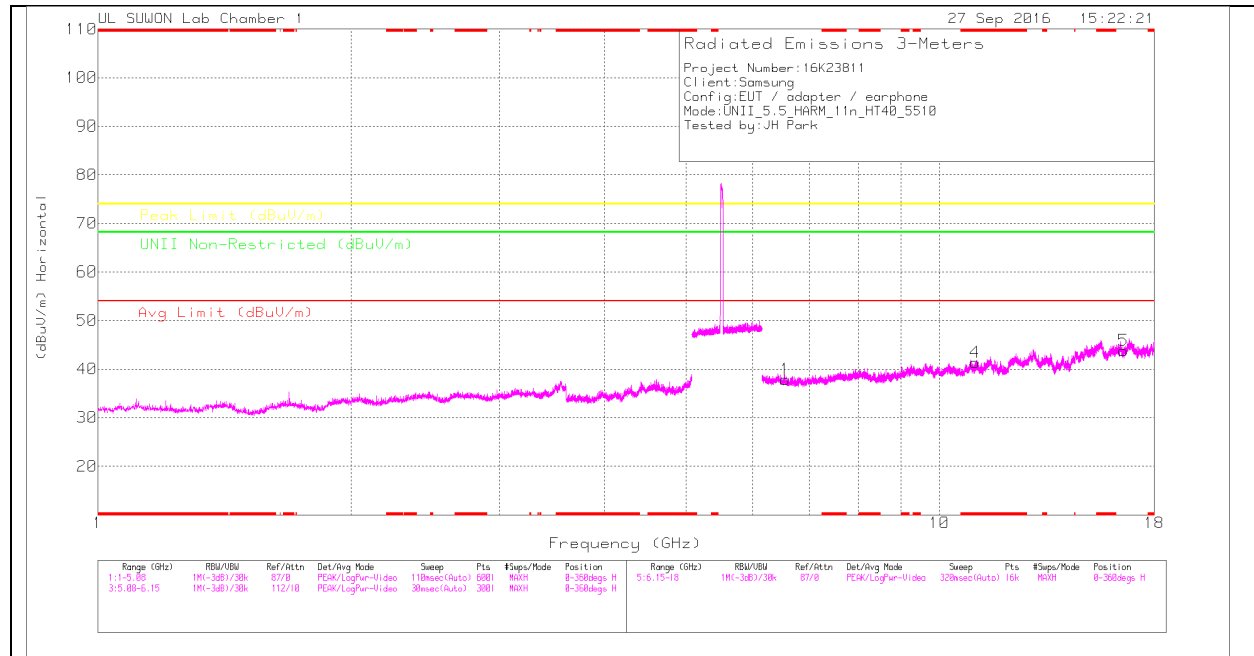

LOW CHANNEL VERTICAL

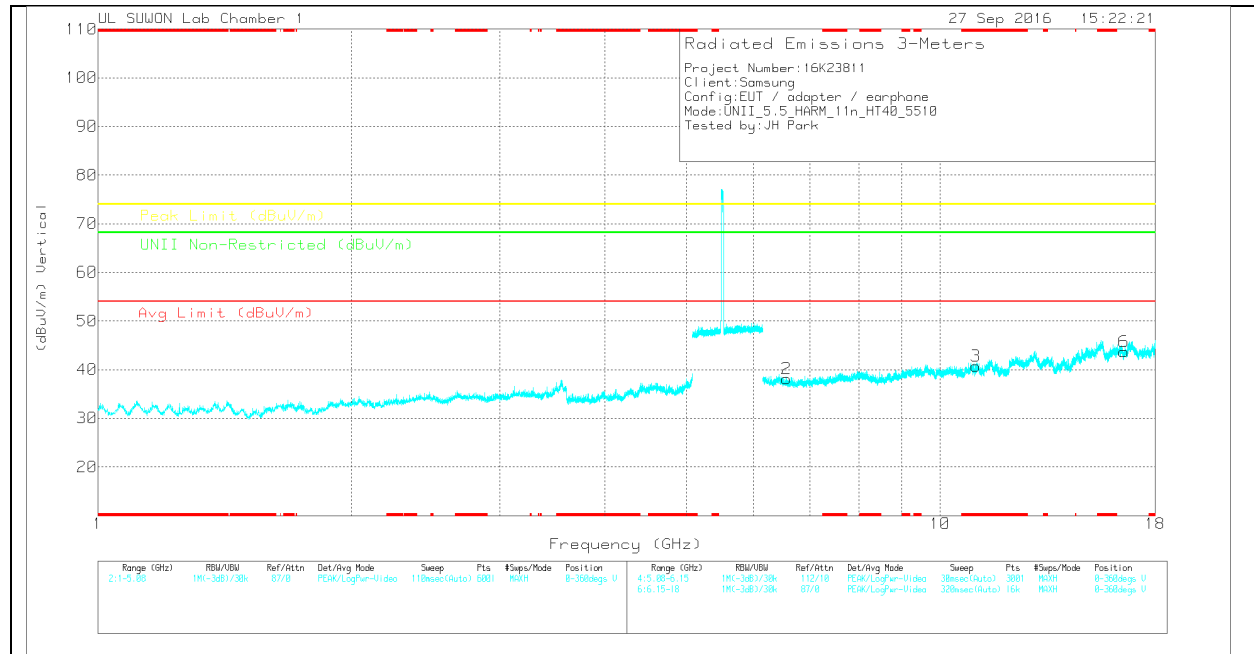

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717/150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.563	33.02	PK	35.5	-30.6	0	37.92	-	-	-	-	68.2	-30.28	0-360	250	H
4	* 11.022	30.35	PK	38.2	-27.2	0	41.35	-	-	74	-32.65	-	-	0-360	150	H
5	16.529	24.68	PK	41.2	-22.1	0	43.78	-	-	-	-	68.2	-24.42	0-360	150	H
2	6.568	33.27	PK	35.5	-30.6	0	38.17	-	-	-	-	68.2	-30.03	0-360	150	V
3	* 11.016	29.76	PK	38.2	-27.3	0	40.66	-	-	74	-33.34	-	-	0-360	150	V
6	16.527	24.54	PK	41.2	-22.1	0	43.64	-	-	-	-	68.2	-24.56	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

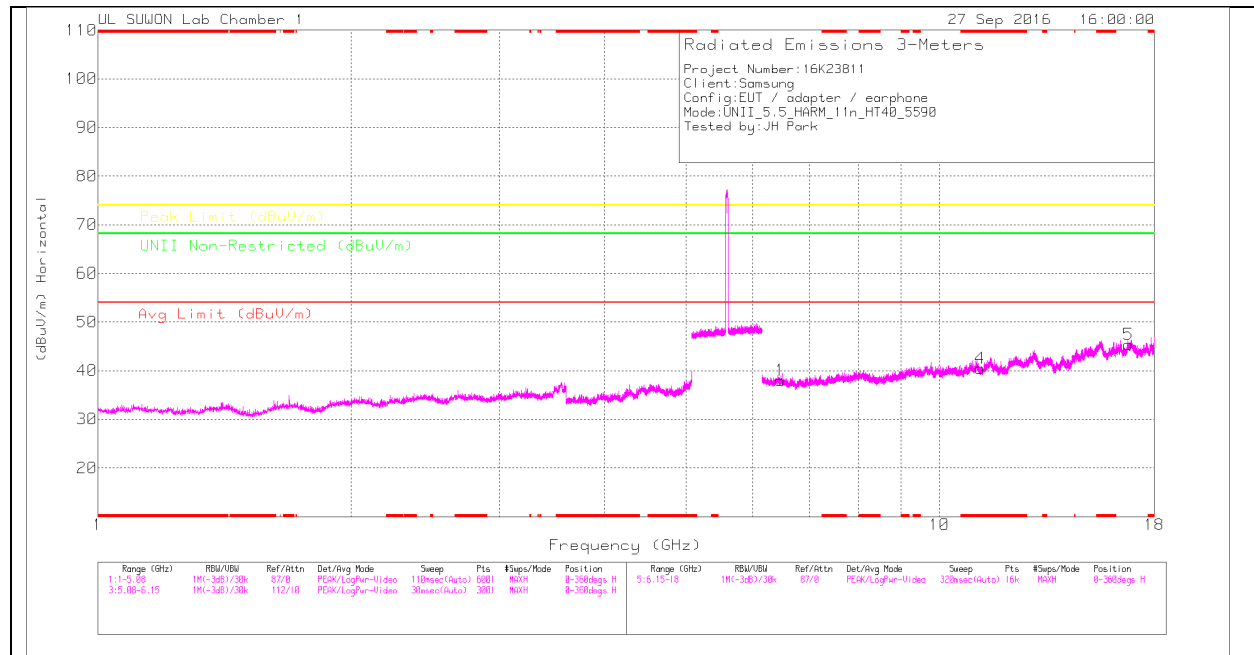

MID CHANNEL VERTICAL

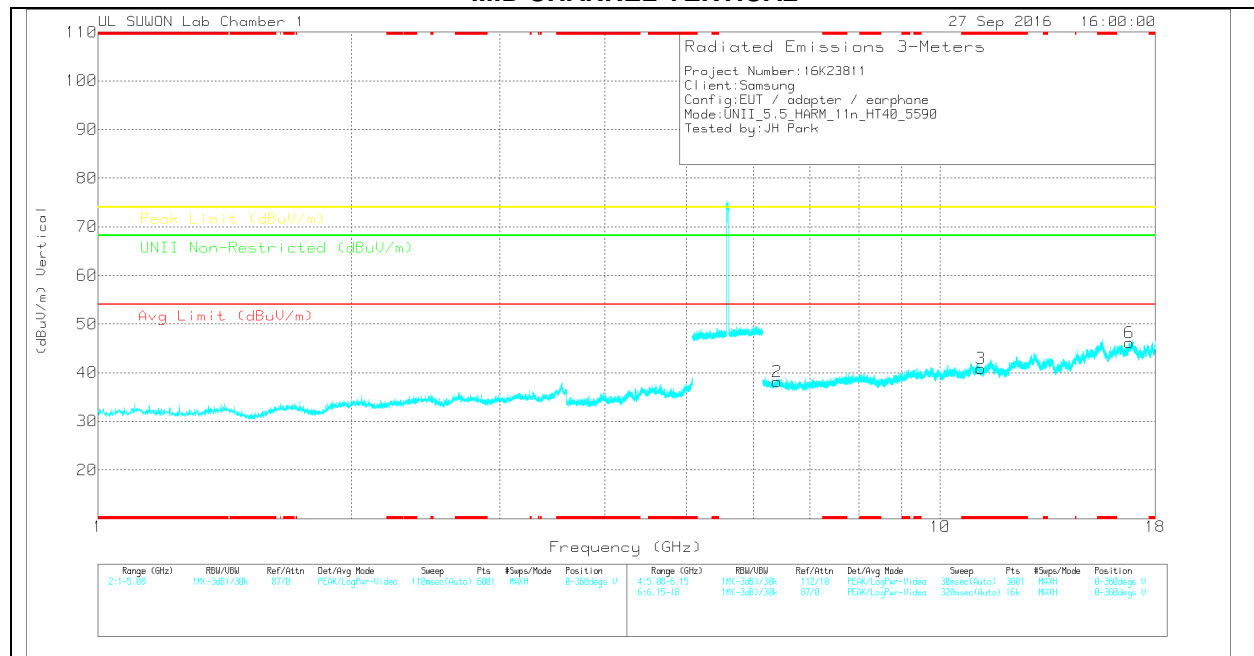

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.469	33.03	PK	35.4	-30.4	0	38.03	-	-	-	-	68.2	-30.17	0-360	250	H
4	* 11.178	29.31	PK	38.3	-27.1	0	40.51	-	-	74	-33.49	-	-	0-360	150	H
5	16.767	25.17	PK	41.3	-21.1	0	45.37	-	-	-	-	68.2	-22.83	0-360	150	H
2	6.404	33.27	PK	35.3	-30.4	0	38.17	-	-	-	-	68.2	-30.03	0-360	250	V
3	* 11.179	29.7	PK	38.3	-27.1	0	40.9	-	-	74	-33.1	-	-	0-360	250	V
6	16.771	25.79	PK	41.3	-21	0	46.09	-	-	-	-	68.2	-22.11	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

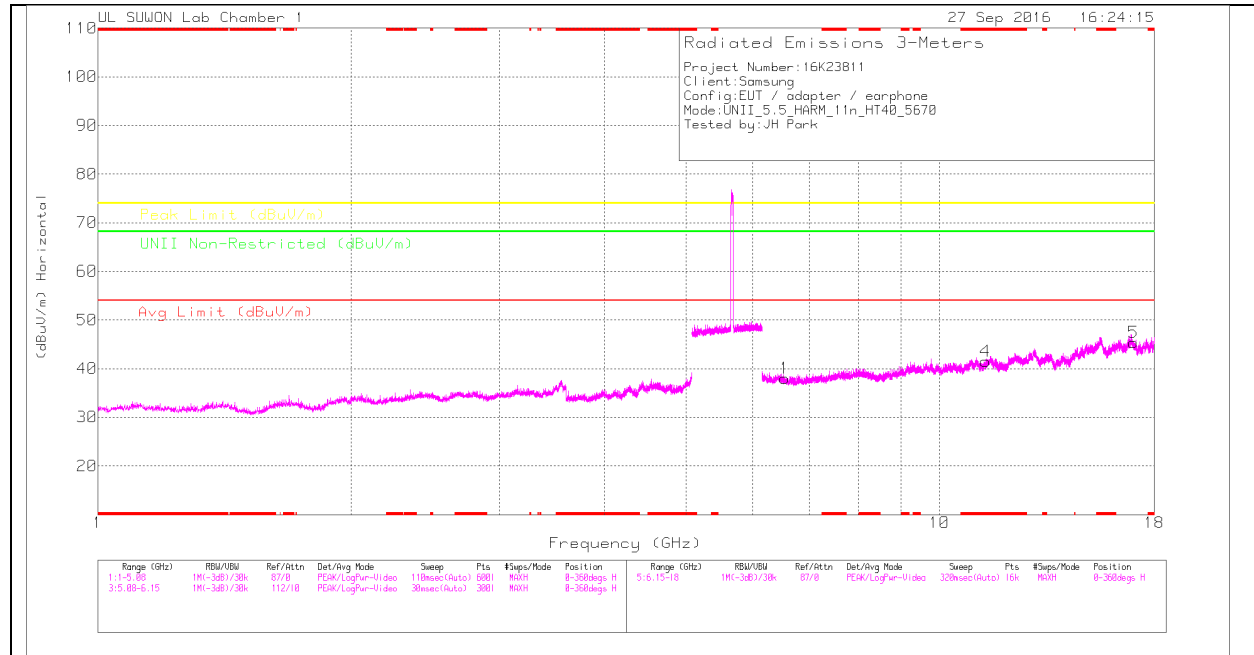

HIGH CHANNEL VERTICAL

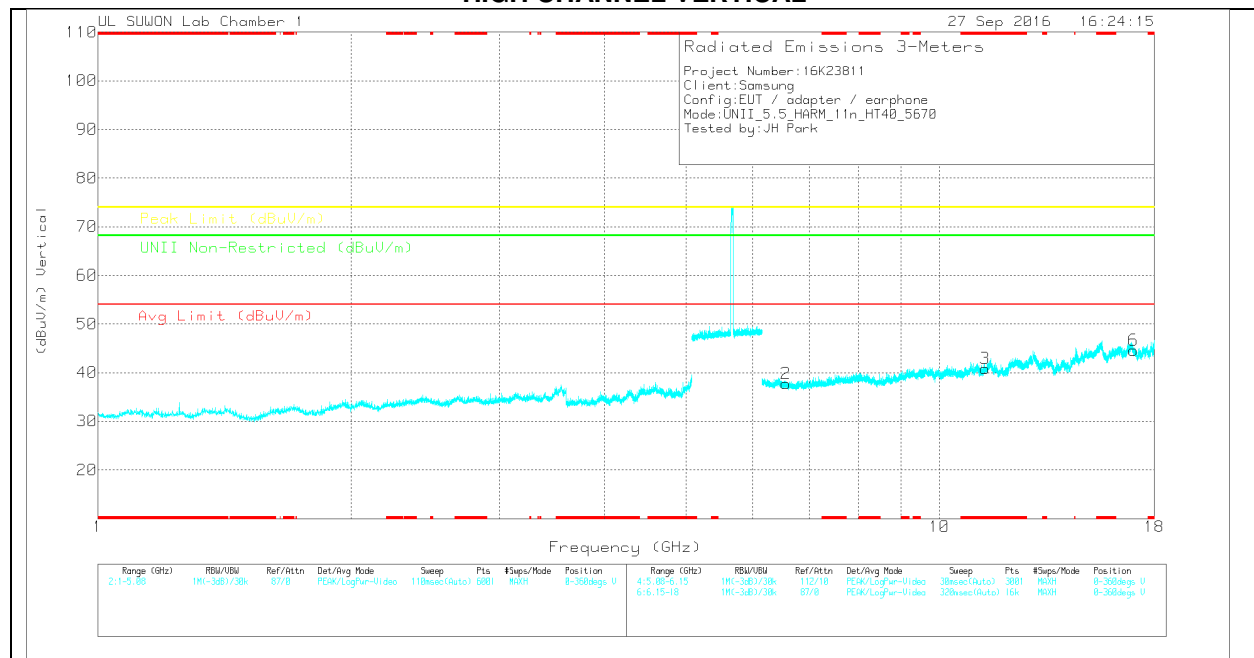

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717/150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.551	33.08	PK	35.5	-30.6	0	37.98	-	-	-	-	68.2	-30.22	0-360	250	H
4	* 11.341	29.79	PK	38.5	-26.8	0	41.49	-	-	74	-32.51	-	-	0-360	150	H
5	17.008	25.58	PK	41.4	-21.6	0	45.38	-	-	-	-	68.2	-22.82	0-360	150	H
2	6.571	32.86	PK	35.5	-30.6	0	37.76	-	-	-	-	68.2	-30.44	0-360	250	V
3	* 11.341	29.15	PK	38.5	-26.8	0	40.85	-	-	74	-33.15	-	-	0-360	250	V
6	17.011	24.74	PK	41.4	-21.5	0	44.64	-	-	-	-	68.2	-23.56	0-360	250	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

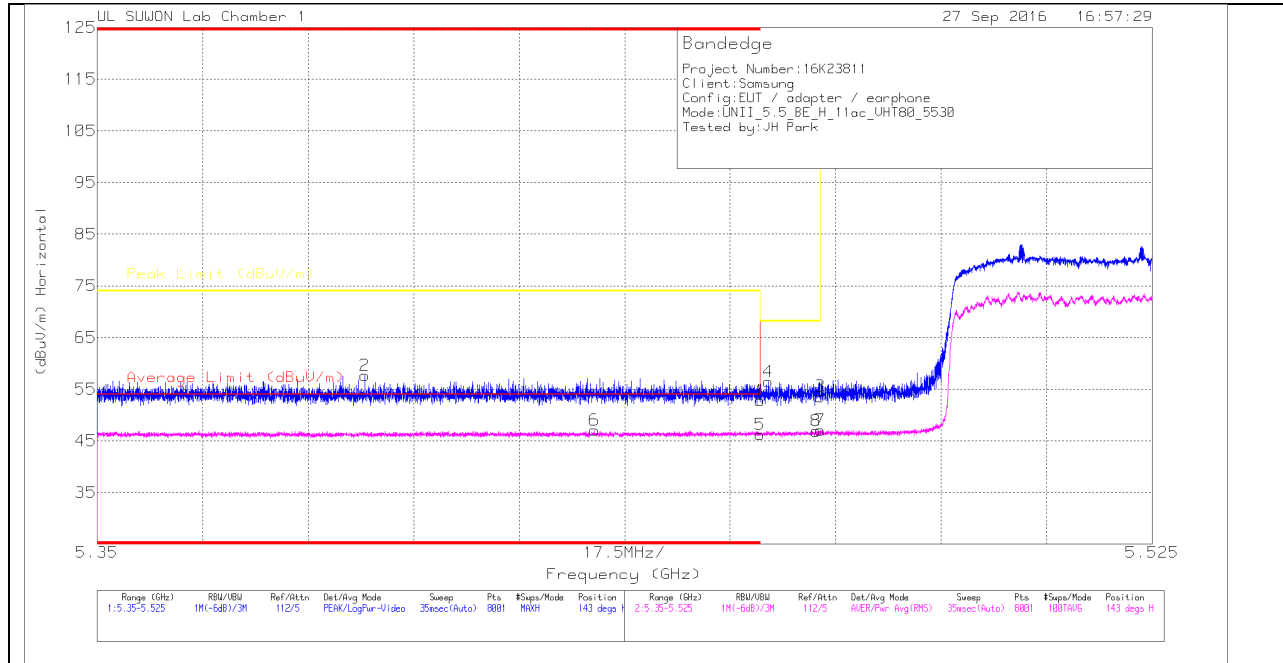

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.4	Pk	34.6	-23.2	0	52.8	-	-	74	-21.2	143	100	H
2	* 5.394	46.43	Pk	34.5	-23.3	0	57.63	-	-	74	-16.37	143	100	H
3	5.47	42.07	Pk	34.6	-23.1	0	53.57	-	-	68.2	-14.63	143	100	H
4	5.461	45.06	Pk	34.6	-23.2	0	56.46	-	-	68.2	-11.74	143	100	H
5	* 5.46	33.35	RMS	34.6	-23.2	1.48	46.23	54	-7.77	-	-	143	100	H
6	* 5.432	34.17	RMS	34.6	-23.2	1.48	47.05	54	-6.95	-	-	143	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

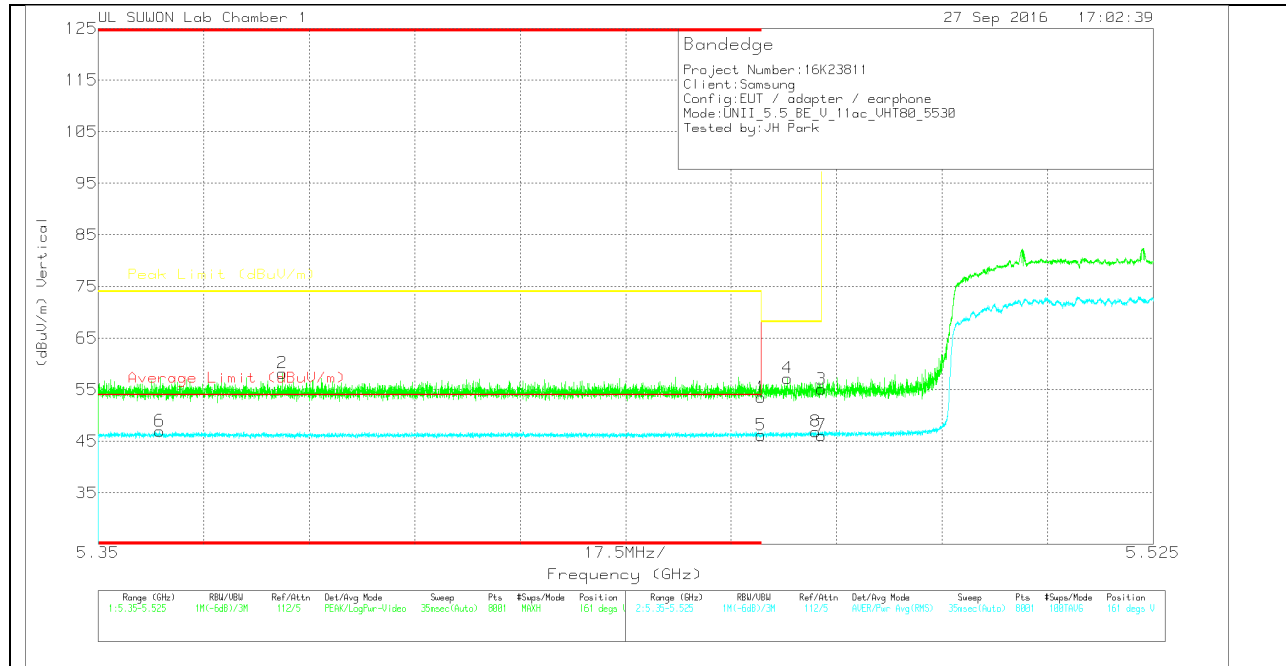

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.12	Pk	34.6	-23.2	0	53.52	-	-	74	-20.48	161	368	V
2	* 5.381	47.01	Pk	34.5	-23.3	0	58.21	-	-	74	-15.79	161	368	V
3	5.47	43.61	Pk	34.6	-23.1	0	55.11	-	-	68.2	-13.09	161	368	V
4	5.464	45.74	Pk	34.6	-23.1	0	57.24	-	-	68.2	-10.96	161	368	V
5	* 5.46	33.29	RMS	34.6	-23.2	1.48	46.17	54	-7.83	-	-	161	368	V
6	* 5.36	34.31	RMS	34.5	-23.3	1.48	46.99	54	-7.01	-	-	161	368	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

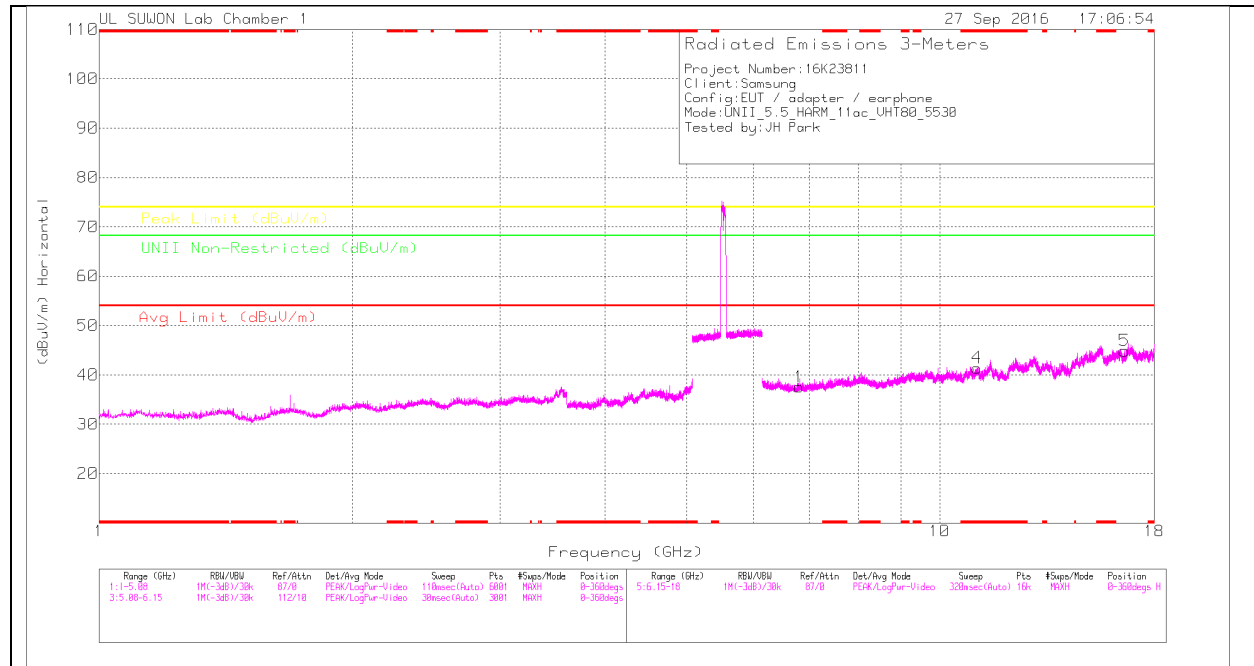

LOW CHANNEL VERTICAL

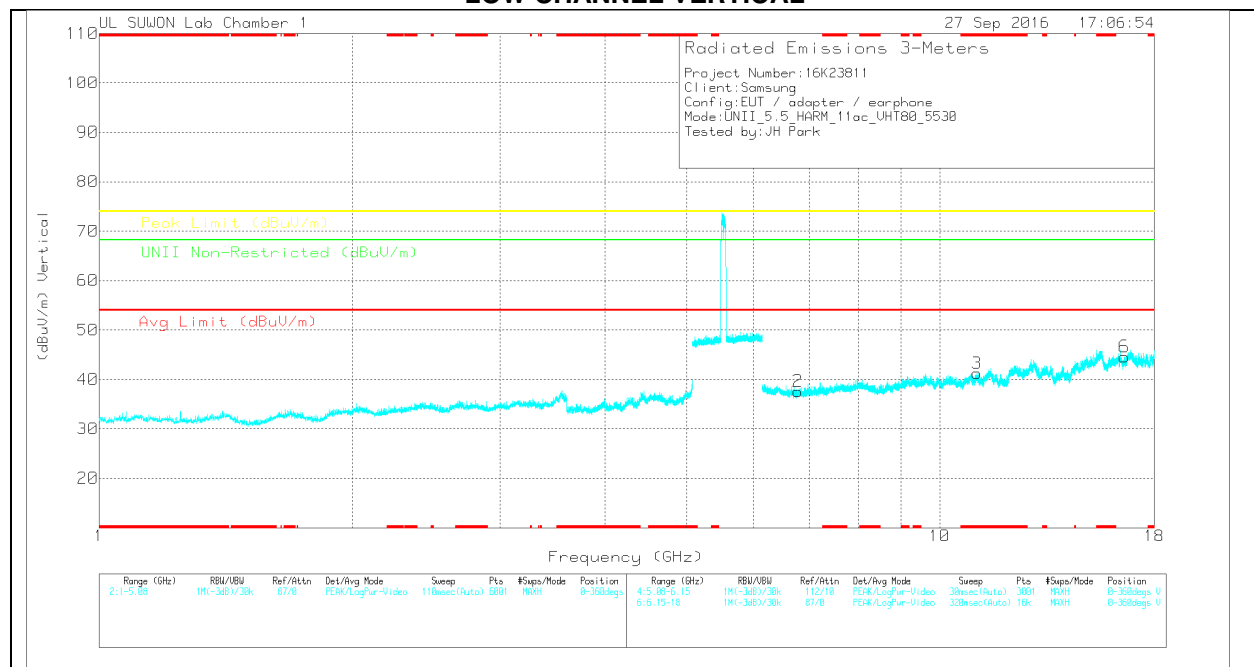

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.809	32.53	PK	35.6	-30.6	0	37.53	-	-	-	-	68.2	-30.67	0-360	250	H
4	* 11.071	30.23	PK	38.2	-27	0	41.43	-	-	74	-32.57	-	-	0-360	150	H
5	16.587	24.9	PK	41.2	-21.2	0	44.9	-	-	-	-	68.2	-23.3	0-360	150	H
2	6.779	32.71	PK	35.6	-30.7	0	37.61	-	-	-	-	68.2	-30.59	0-360	150	V
3	* 11.074	30.06	PK	38.2	-27	0	41.26	-	-	74	-32.74	-	-	0-360	150	V
6	16.583	24.59	PK	41.2	-21.2	0	44.59	-	-	-	-	68.2	-23.61	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

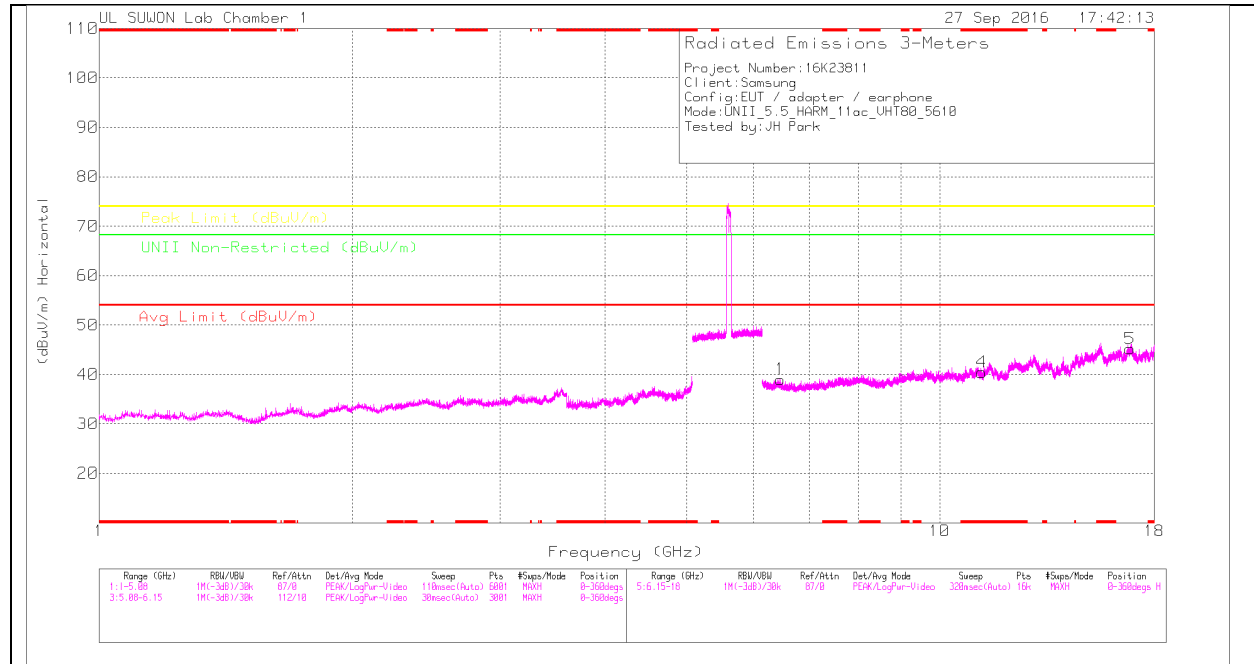

HIGH CHANNEL VERTICAL

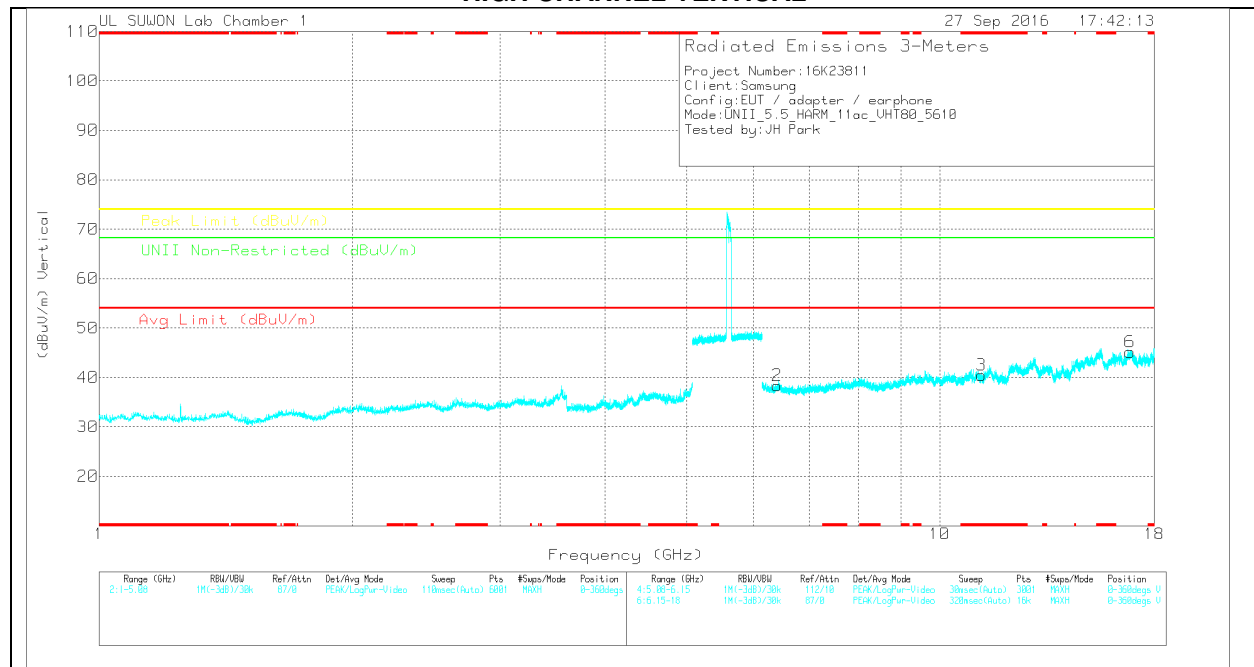

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.459	33.89	PK	35.4	-30.3	0	38.99	-	-	-	-	68.2	-29.21	0-360	250	H
4	* 11.22	29.63	PK	38.4	-27.6	0	40.43	-	-	74	-33.57	-	-	0-360	250	H
5	16.841	24.46	PK	41.3	-20.6	0	45.16	-	-	-	-	68.2	-23.04	0-360	150	H
2	6.409	33.36	PK	35.3	-30.3	0	38.36	-	-	-	-	68.2	-29.84	0-360	150	V
3	* 11.214	29.55	PK	38.4	-27.5	0	40.45	-	-	74	-33.55	-	-	0-360	150	V
6	16.841	24.45	PK	41.3	-20.6	0	45.15	-	-	-	-	68.2	-23.05	0-360	150	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.4. 5.8 GHz

11.4.1. TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

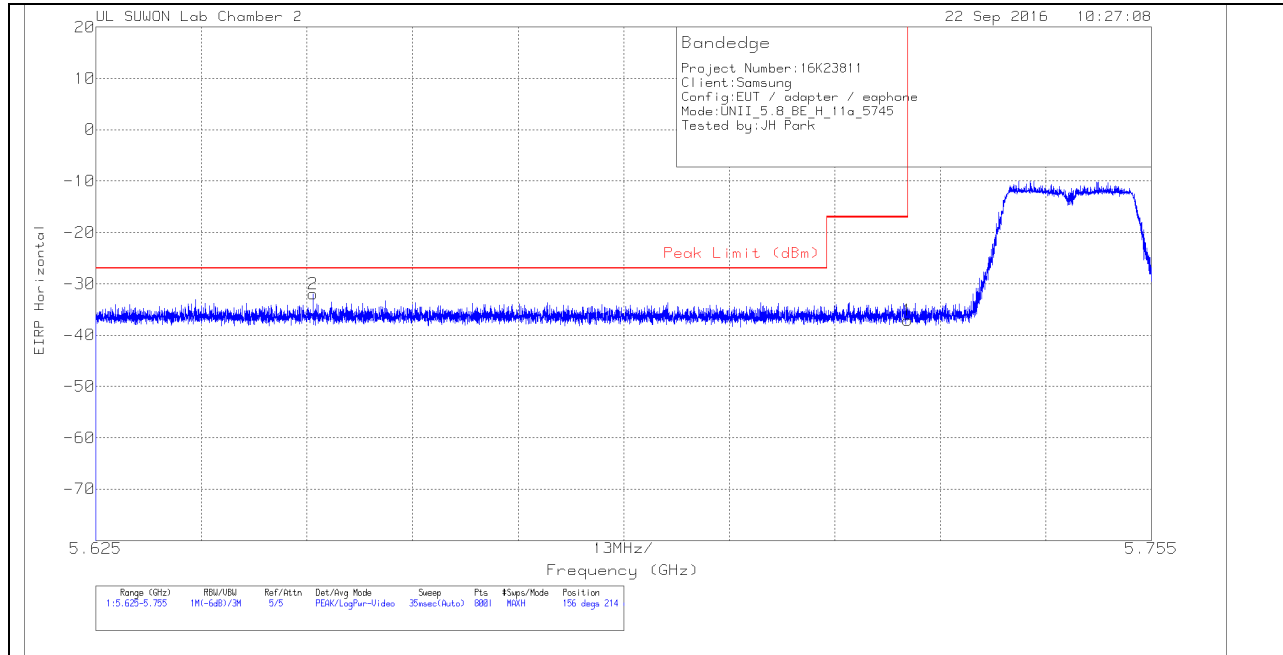


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117/0016 8724_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-68	Pk	34.7	-15.6	11.8	0	-37.1	-17	-20.1	156	214	H
2	5.652	-62.69	Pk	34.6	-15.7	11.8	0	-31.99	-27	-4.99	156	214	H

Pk - Peak detector

VERTICAL PEAK PLOT

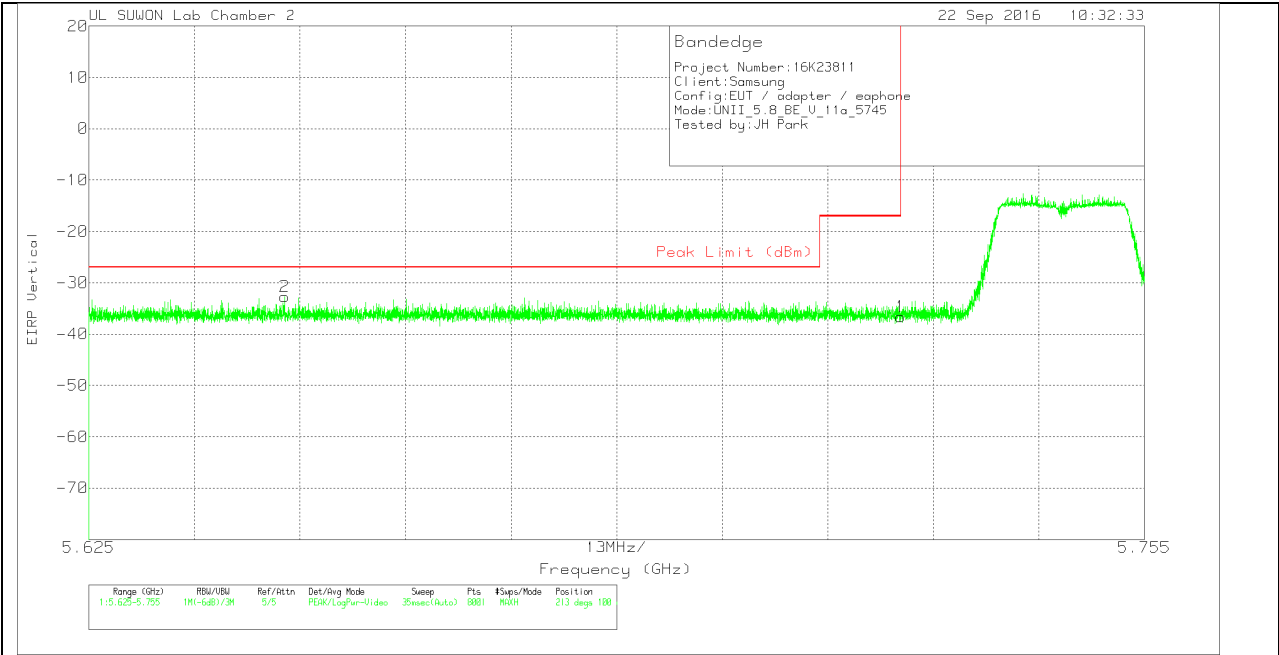

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-67.55	Pk	34.7	-15.6	11.8	0	-36.65	-17	-19.65	213	100	V
2	5.649	-63.43	Pk	34.6	-15.7	11.8	0	-32.73	-27	-5.73	213	100	V

Pk - Peak detector

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

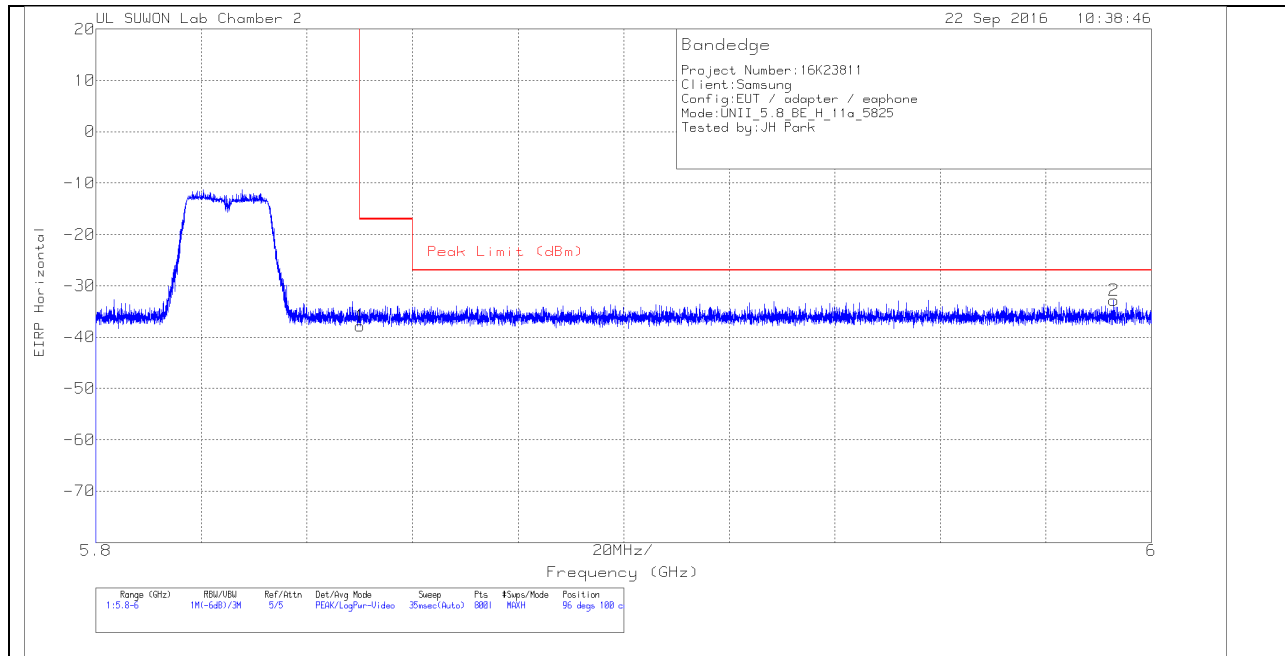


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.85	Pk	34.7	-15.5	11.8	0	-37.85	-17	-20.85	96	100	H
2	5.993	-64	Pk	34.8	-15.4	11.8	0	-32.8	-27	-5.8	96	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

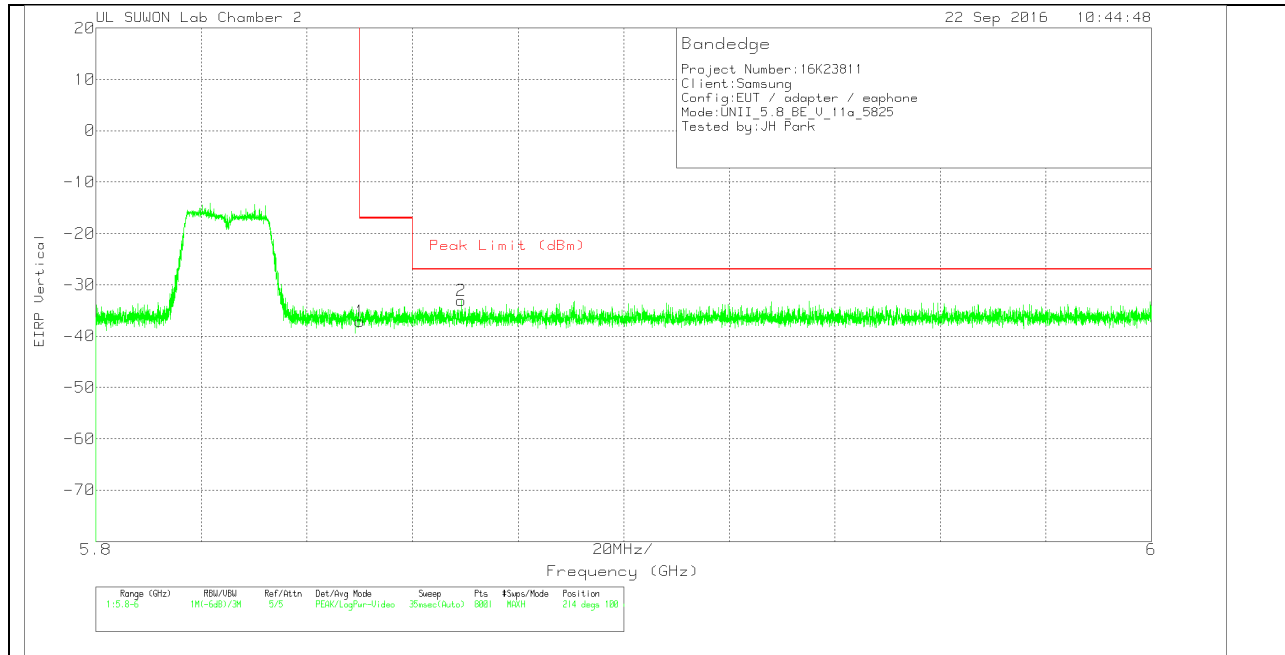


VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.11	Pk	34.7	-15.5	11.8	0	-37.11	-17	-20.11	214	100	V
2	5.869	-64.11	Pk	34.7	-15.5	11.8	0	-33.11	-27	-6.11	214	100	V

Pk - Peak detector

LOW CHANNEL HORIZONTAL

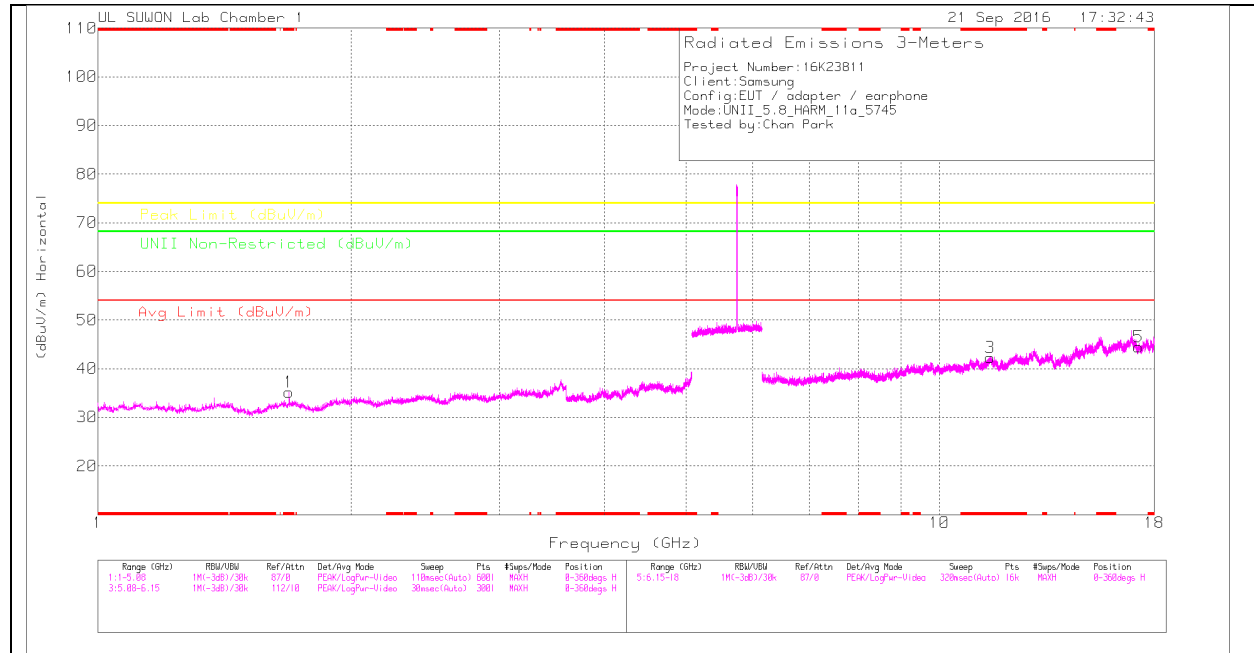

LOW CHANNEL VERTICAL

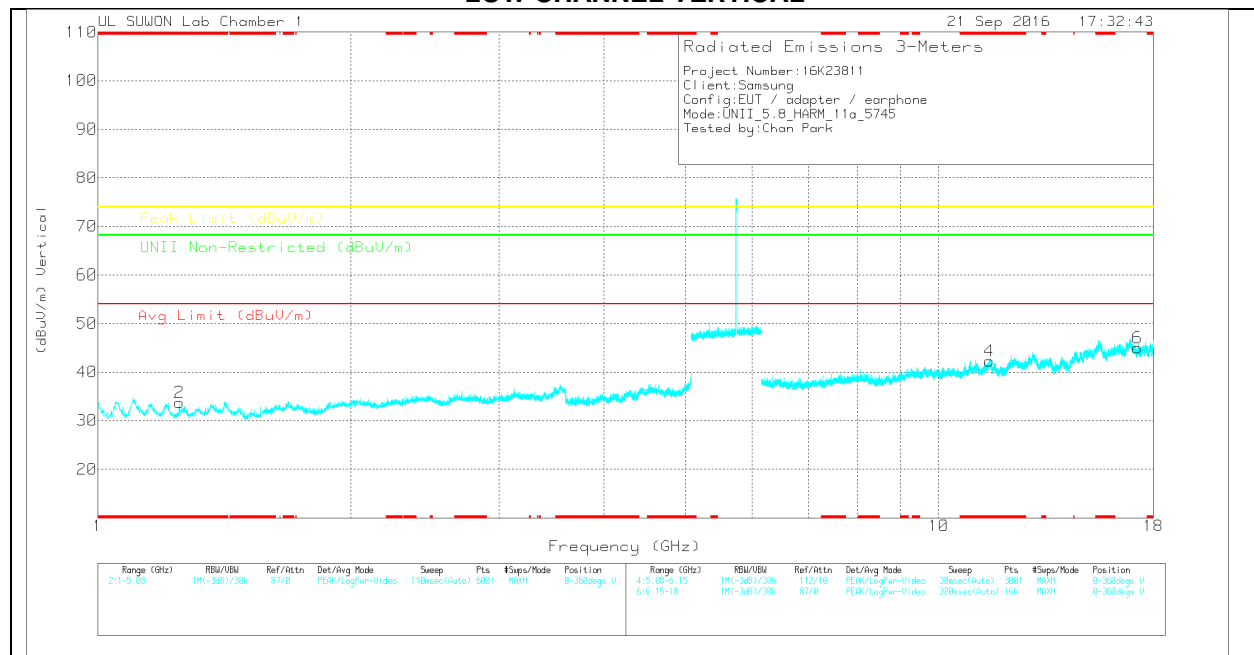

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	31170016 8717_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.687	45.21	PK	29.5	-39.5	0	35.21	-	-	74	-38.79	-	-	0-360	150	H
2	* 1.125	45.68	PK	28.3	-40.2	0	33.78	-	-	74	-40.22	-	-	0-360	149	V
3	* 11.492	30.7	PK	38.6	-27	0	42.3	-	-	74	-31.7	-	-	0-360	250	H
5	17.236	24.62	PK	41.2	-21.3	0	44.52	-	-	-	-	68.2	-23.68	0-360	150	H
4	* 11.493	30.7	PK	38.6	-27	0	42.3	-	-	74	-31.7	-	-	0-360	150	V
6	17.239	25.14	PK	41.2	-21.3	0	45.04	-	-	-	-	68.2	-23.16	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

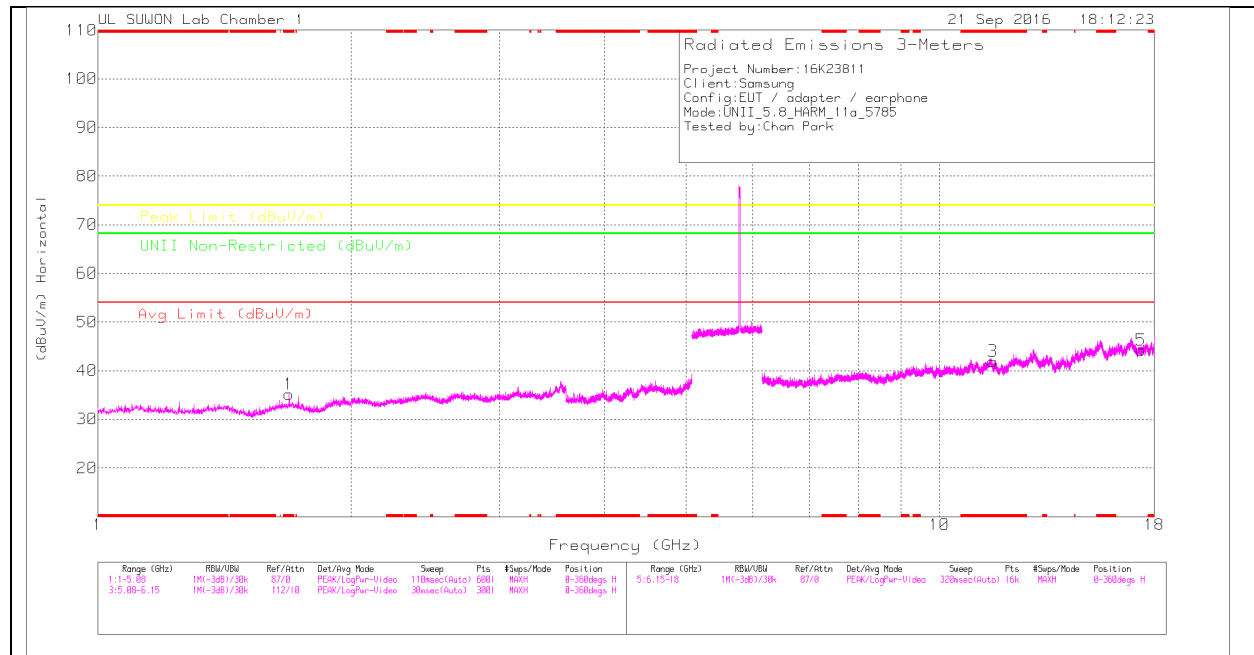

MID CHANNEL VERTICAL

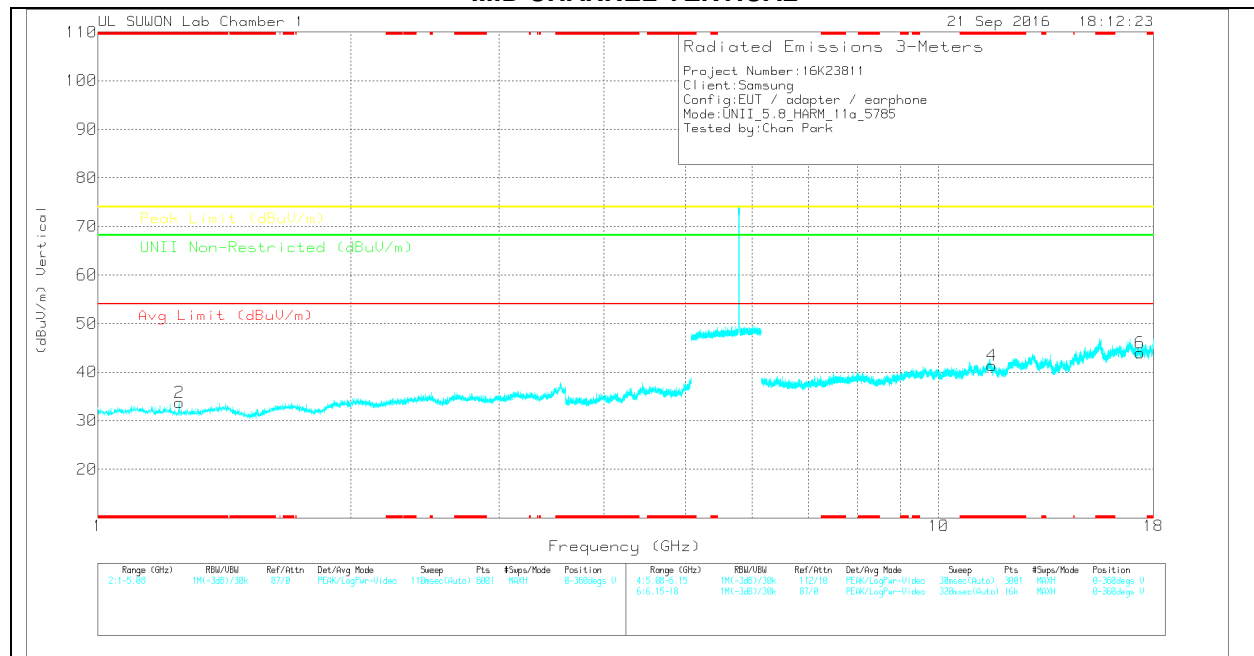

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.687	45.19	PK	29.5	-39.5	0	35.19	-	-	74	-38.81	-	-	0-360	150	H
2	* 1.125	45.59	PK	28.3	-40.2	0	33.69	-	-	74	-40.31	-	-	0-360	250	V
3	* 11.573	30.44	PK	38.7	-27.2	0	41.94	-	-	74	-32.06	-	-	0-360	150	H
5	17.356	24.71	PK	41.2	-21.7	0	44.21	-	-	-	-	68.2	-23.99	0-360	150	H
4	* 11.57	29.86	PK	38.7	-27.2	0	41.36	-	-	74	-32.64	-	-	0-360	250	V
6	17.356	24.5	PK	41.2	-21.7	0	44	-	-	-	-	68.2	-24.2	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

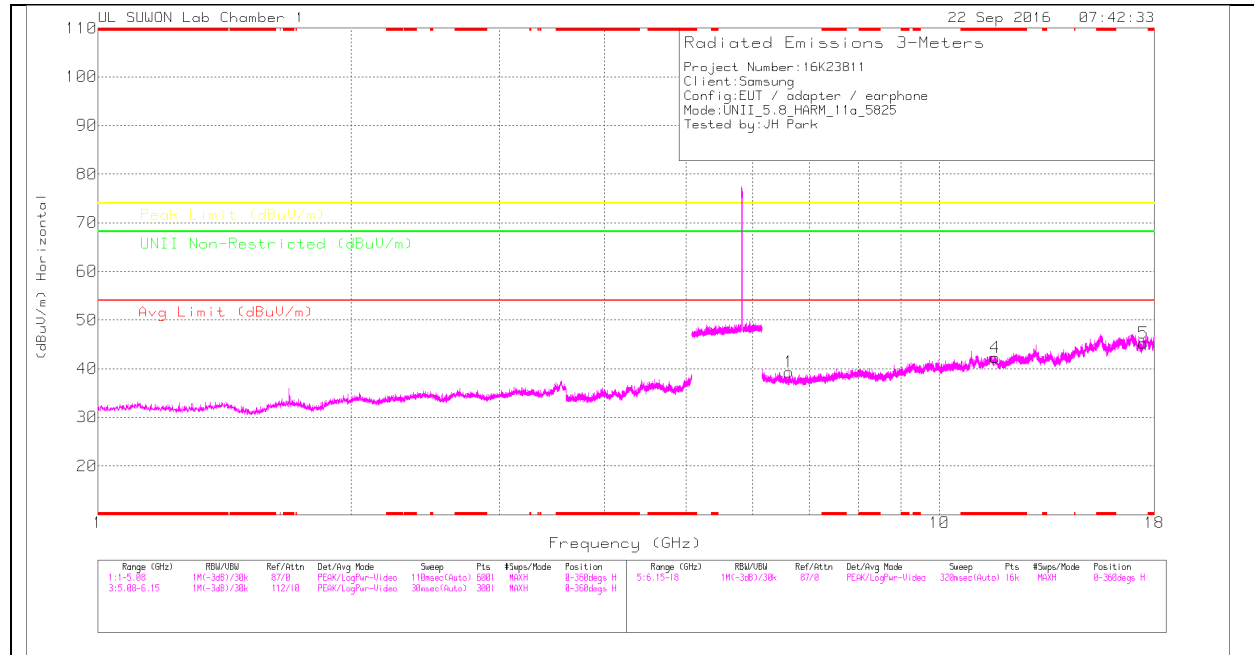

HIGH CHANNEL VERTICAL

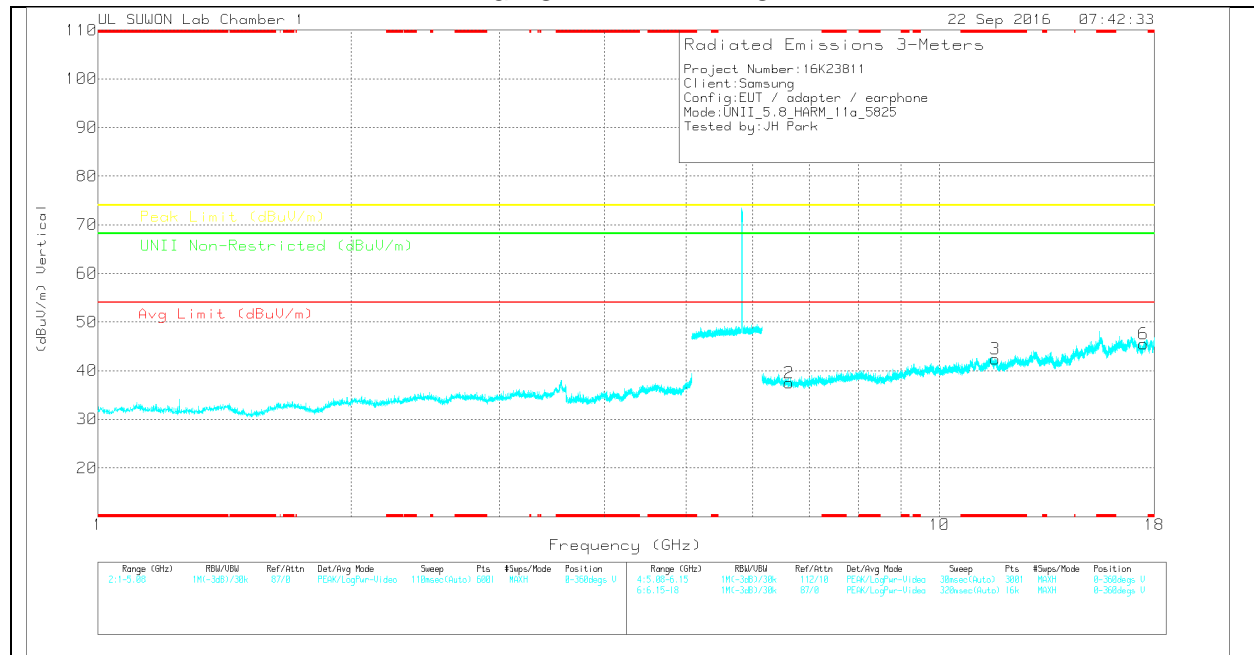

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 717)_15061 9	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.623	34.54	PK	35.5	-30.8	0	39.24	-	-	-	-	68.2	-28.96	0-360	150	H
4	* 11.647	31.12	PK	38.7	-27.6	0	42.22	-	-	74	-31.78	-	-	0-360	250	H
5	17.473	25.59	PK	41.1	-21.5	0	45.19	-	-	-	-	68.2	-23.01	0-360	150	H
2	6.631	32.78	PK	35.5	-30.8	0	37.48	-	-	-	-	68.2	-30.72	0-360	250	V
3	* 11.65	31.25	PK	38.7	-27.6	0	42.35	-	-	74	-31.65	-	-	0-360	250	V
6	17.477	26.02	PK	41.1	-21.6	0	45.52	-	-	-	-	68.2	-22.68	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.4.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

HORIZONTAL PEAK PLOT

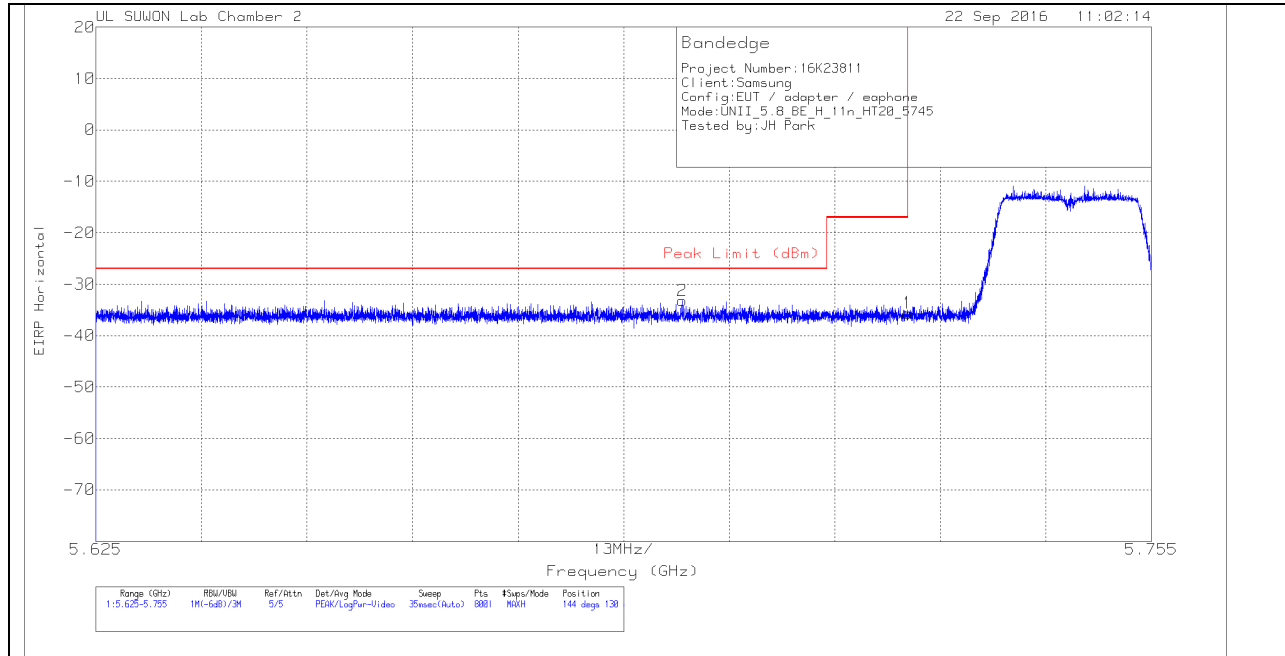


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-66.48	Pk	34.7	-15.6	11.8	0	-35.58	-17	-18.58	144	130	H
2	5.697	-64.08	Pk	34.7	-15.6	11.8	0	-33.18	-27	-6.18	144	130	H

Pk - Peak detector

VERTICAL PEAK PLOT

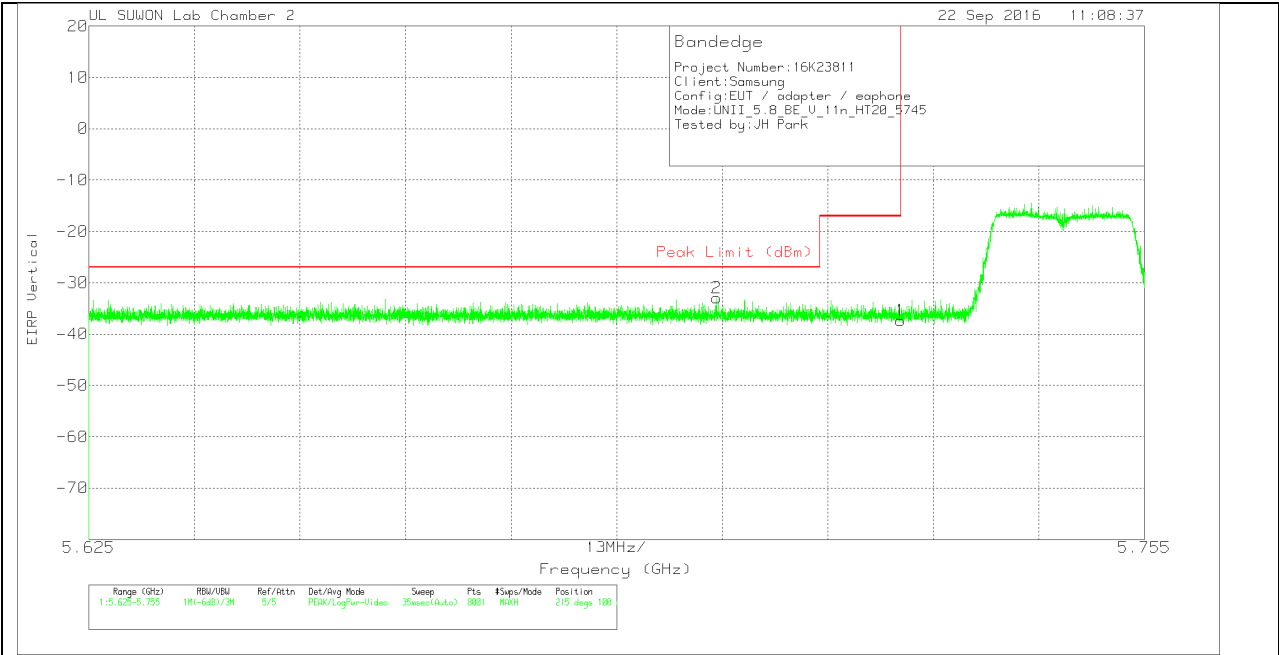

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-68.28	Pk	34.7	-15.6	11.8	0	-37.38	-17	-20.38	215	100	V
2	5.702	-63.82	Pk	34.7	-15.6	11.8	0	-32.92	-27	-5.92	215	100	V

Pk - Peak detector

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

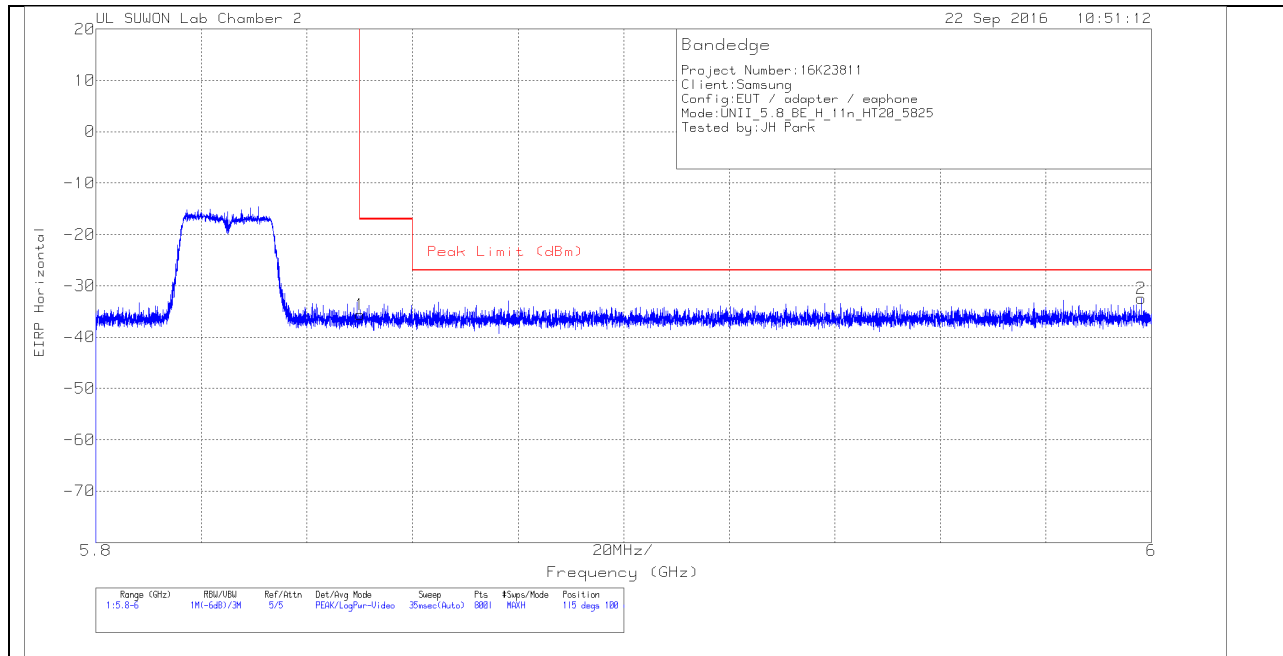


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.67	Pk	34.7	-15.5	11.8	0	-35.67	-17	-18.67	115	100	H
2	5.998	-63.65	Pk	34.8	-15.4	11.8	0	-32.45	-27	-5.45	115	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

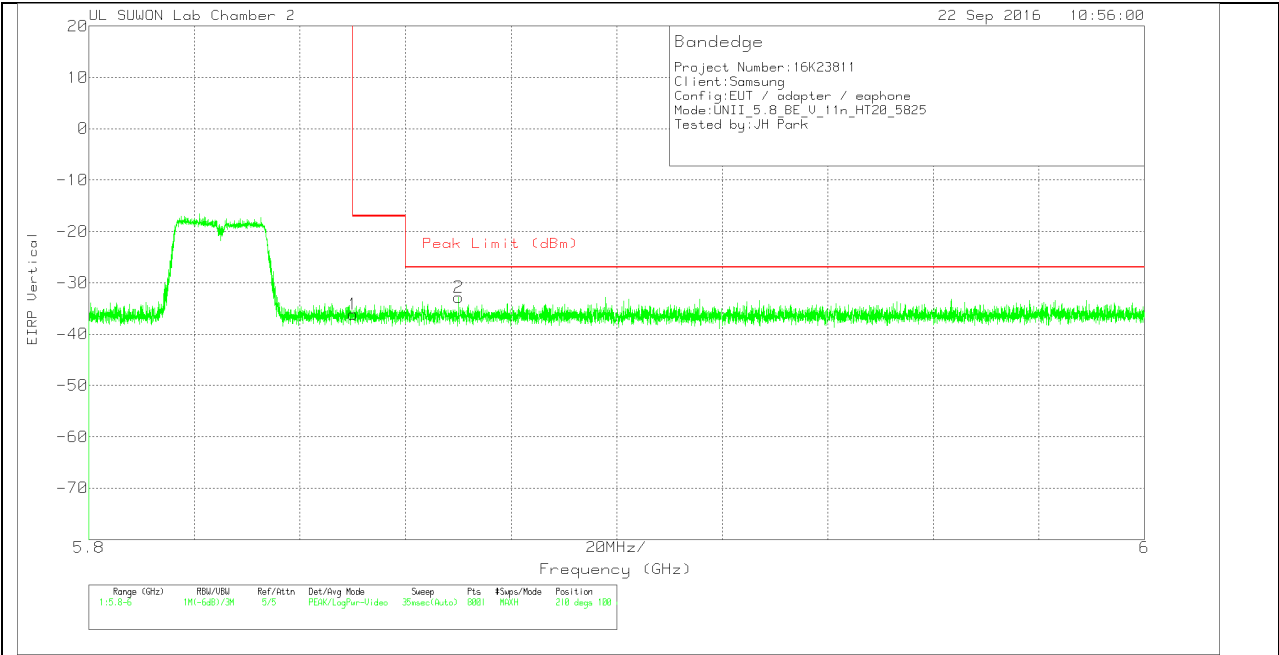


VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.14	Pk	34.7	-15.5	11.8	0	-36.14	-17	-19.14	210	100	V
2	5.87	-63.83	Pk	34.7	-15.5	11.8	0	-32.83	-27	-5.83	210	100	V

Pk - Peak detector

LOW CHANNEL HORIZONTAL

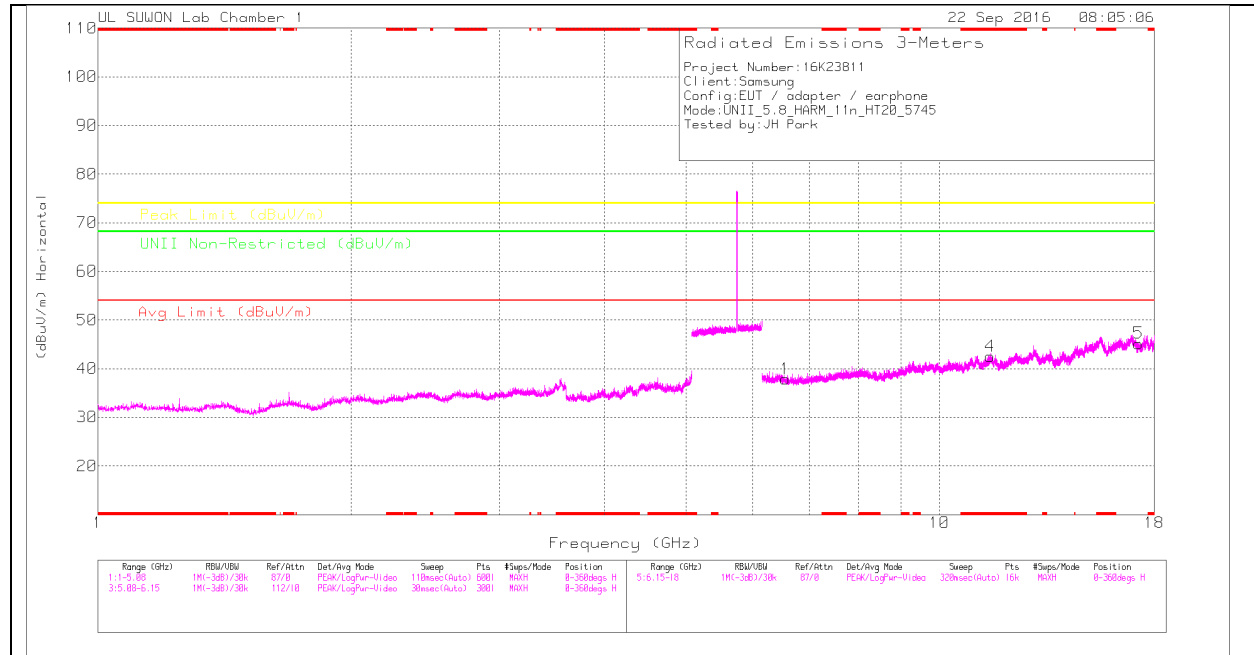

LOW CHANNEL VERTICAL

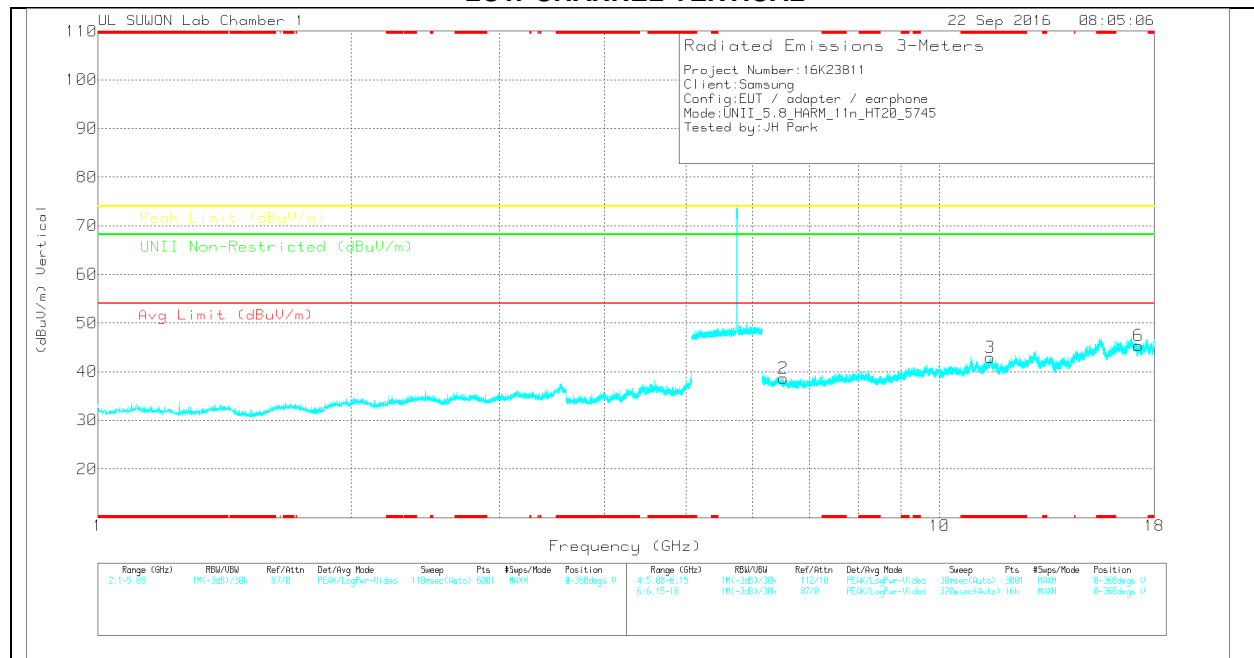

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	31170016 87171_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.559	33.01	PK	35.5	-30.6	0	37.91	-	-	-	-	68.2	-30.29	0-360	150	H
4	* 11.488	31.06	PK	38.6	-27.1	0	42.56	-	-	74	-31.44	-	-	0-360	150	H
5	17.229	25.28	PK	41.2	-21.3	0	45.18	-	-	-	-	68.2	-23.02	0-360	150	H
2	6.524	33.99	PK	35.4	-30.8	0	38.59	-	-	-	-	68.2	-29.61	0-360	150	V
3	* 11.49	31.37	PK	38.6	-27	0	42.97	-	-	74	-31.03	-	-	0-360	150	V
6	17.236	25.51	PK	41.2	-21.3	0	45.41	-	-	-	-	68.2	-22.79	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

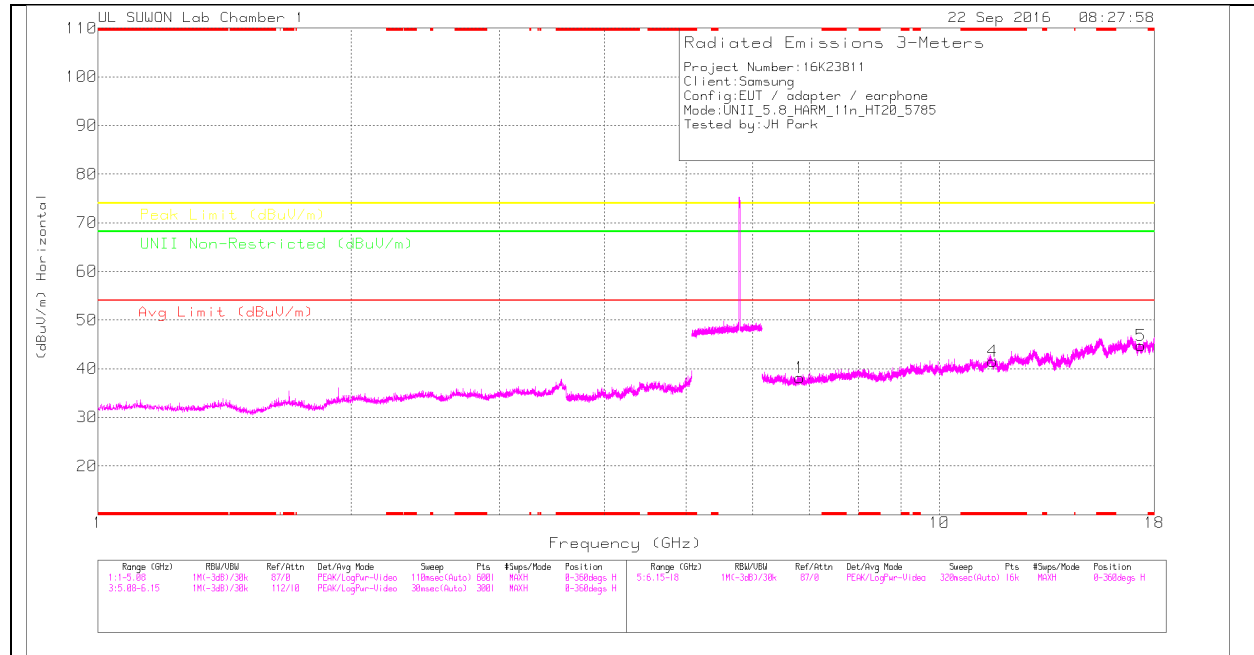

MID CHANNEL VERTICAL

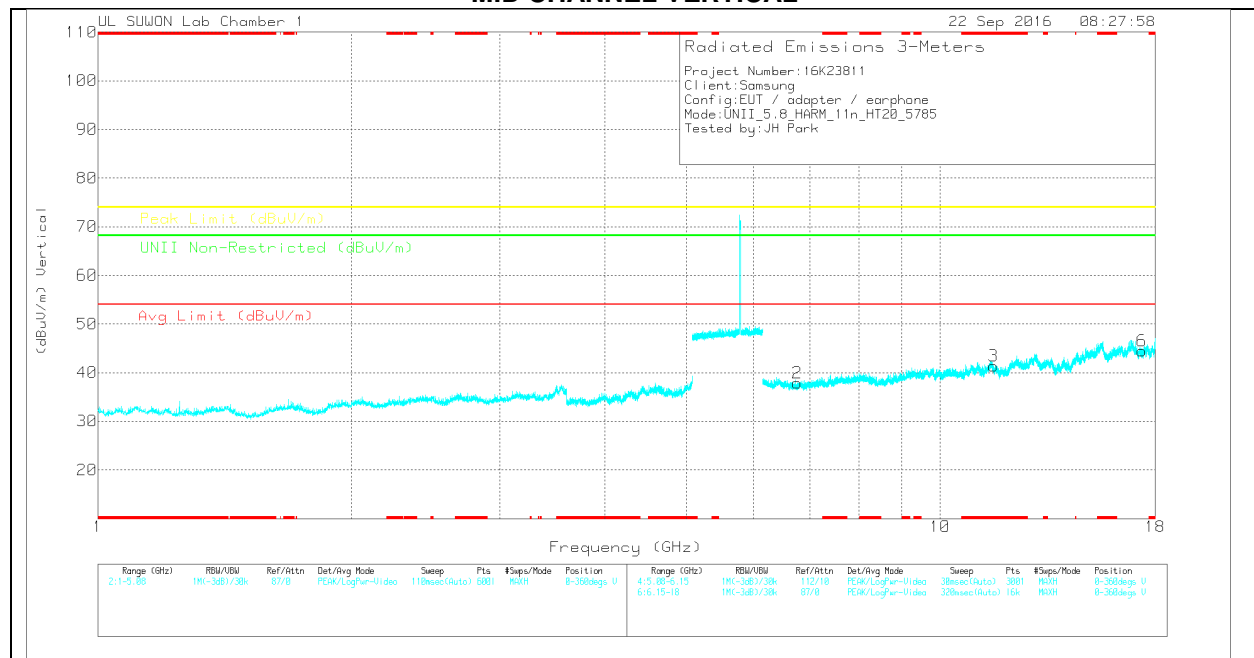

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717) 150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.822	33.01	PK	35.6	-30.5	0	38.11	-	-	-	-	68.2	-30.09	0-360	250	H
4	* 11.569	30.03	PK	38.7	-27.2	0	41.53	-	-	74	-32.47	-	-	0-360	150	H
5	17.351	25.36	PK	41.2	-21.8	0	44.76	-	-	-	-	68.2	-23.44	0-360	150	H
2	6.766	33.12	PK	35.6	-30.8	0	37.92	-	-	-	-	68.2	-30.28	0-360	250	V
3	* 11.571	29.88	PK	38.7	-27.2	0	41.38	-	-	74	-32.62	-	-	0-360	250	V
6	17.357	24.94	PK	41.2	-21.7	0	44.44	-	-	-	-	68.2	-23.76	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

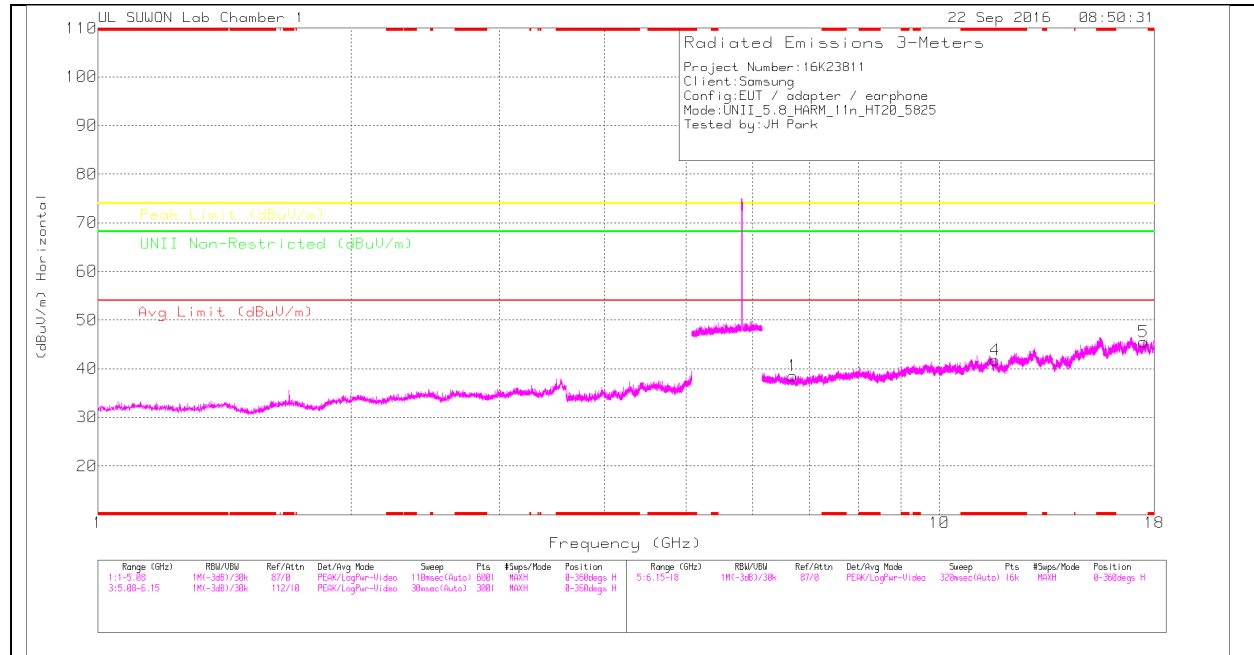

HIGH CHANNEL VERTICAL

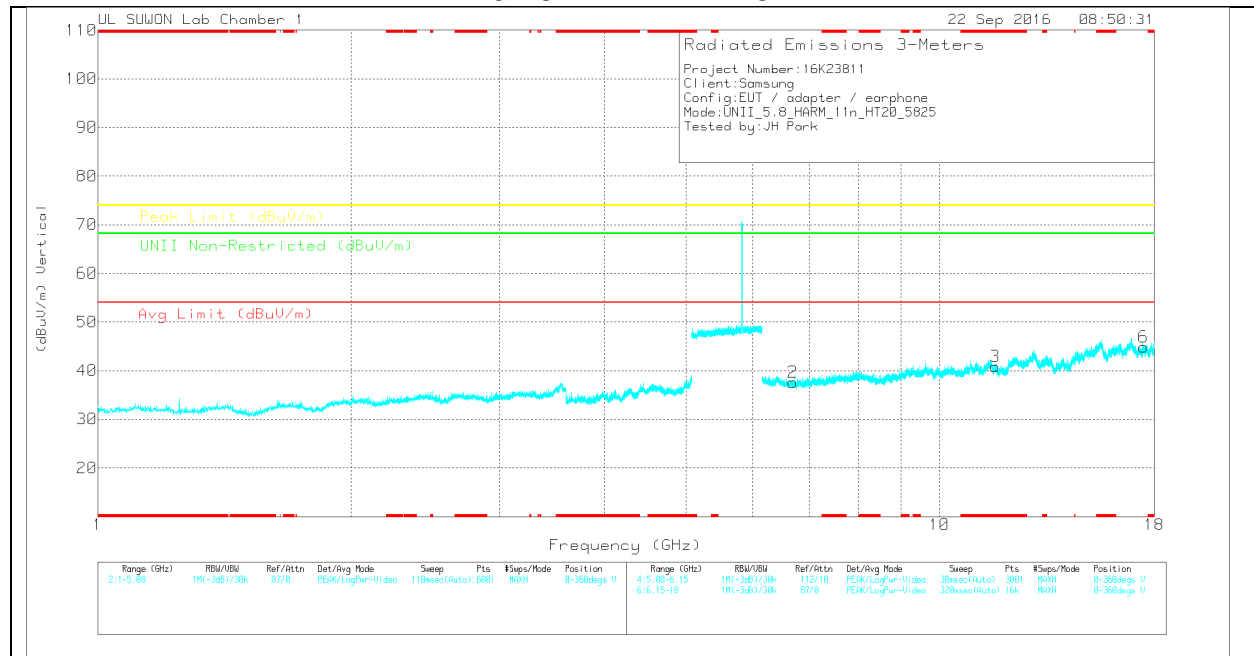

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	31170016 8717_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.694	33.87	PK	35.5	-30.8	0	38.57	-	-	-	-	68.2	-29.63	0-360	250	H
4	* 11.649	30.68	PK	38.7	-27.6	0	41.78	-	-	74	-32.22	-	-	0-360	150	H
5	17.477	25.95	PK	41.1	-21.6	0	45.45	-	-	-	-	68.2	-22.75	0-360	150	H
2	6.694	32.97	PK	35.5	-30.8	0	37.67	-	-	-	-	68.2	-30.53	0-360	250	V
3	* 11.65	29.73	PK	38.7	-27.6	0	40.83	-	-	74	-33.17	-	-	0-360	150	V
6	17.475	25.38	PK	41.1	-21.6	0	44.88	-	-	-	-	68.2	-23.32	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.4.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.8GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

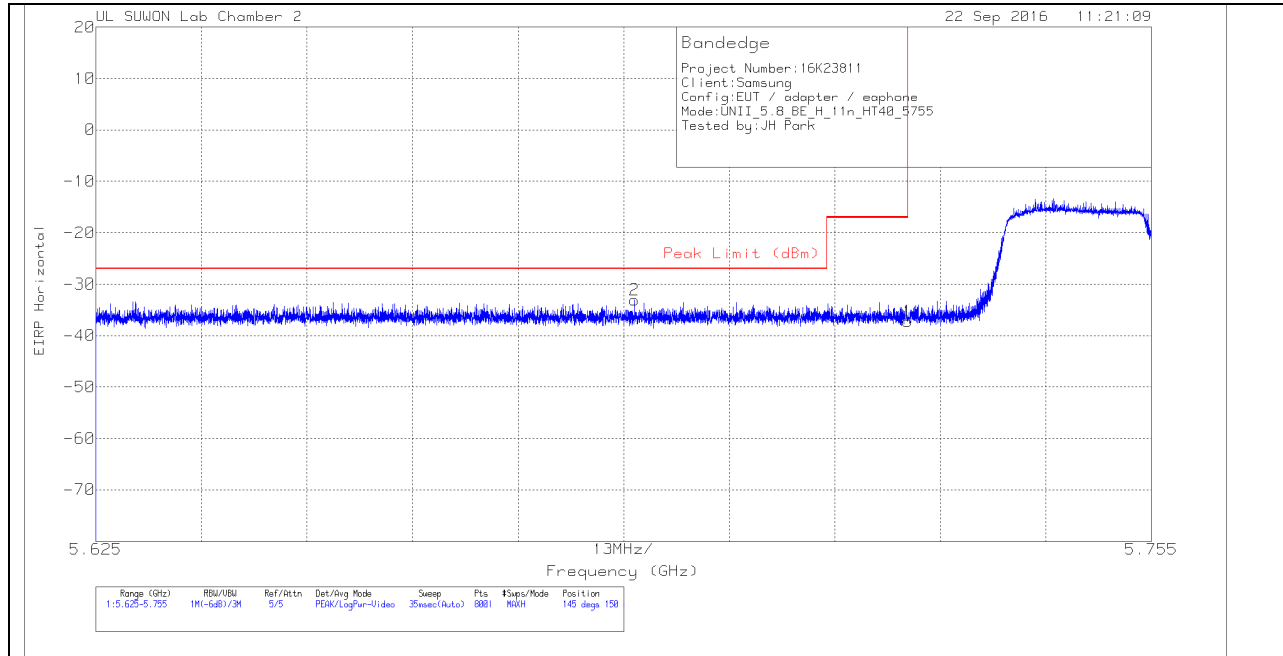


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-68.12	Pk	34.7	-15.6	11.8	0	-37.22	-17	-20.22	145	150	H
2	5.691	-63.87	Pk	34.6	-15.6	11.8	0	-33.07	-27	-6.07	145	150	H

Pk - Peak detector

VERTICAL PEAK PLOT

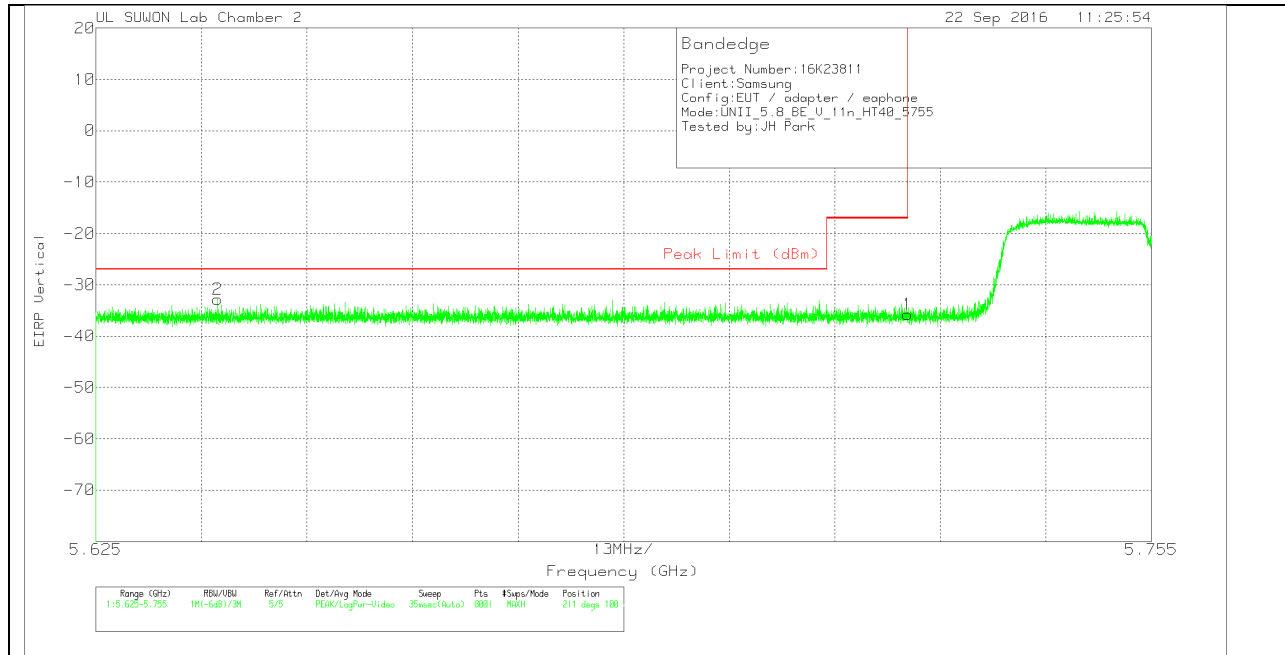

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-66.65	Pk	34.7	-15.6	11.8	0	-35.75	-17	-18.75	211	100	V
2	5.64	-63.52	Pk	34.6	-15.7	11.8	0	-32.82	-27	-5.82	211	100	V

Pk - Peak detector

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

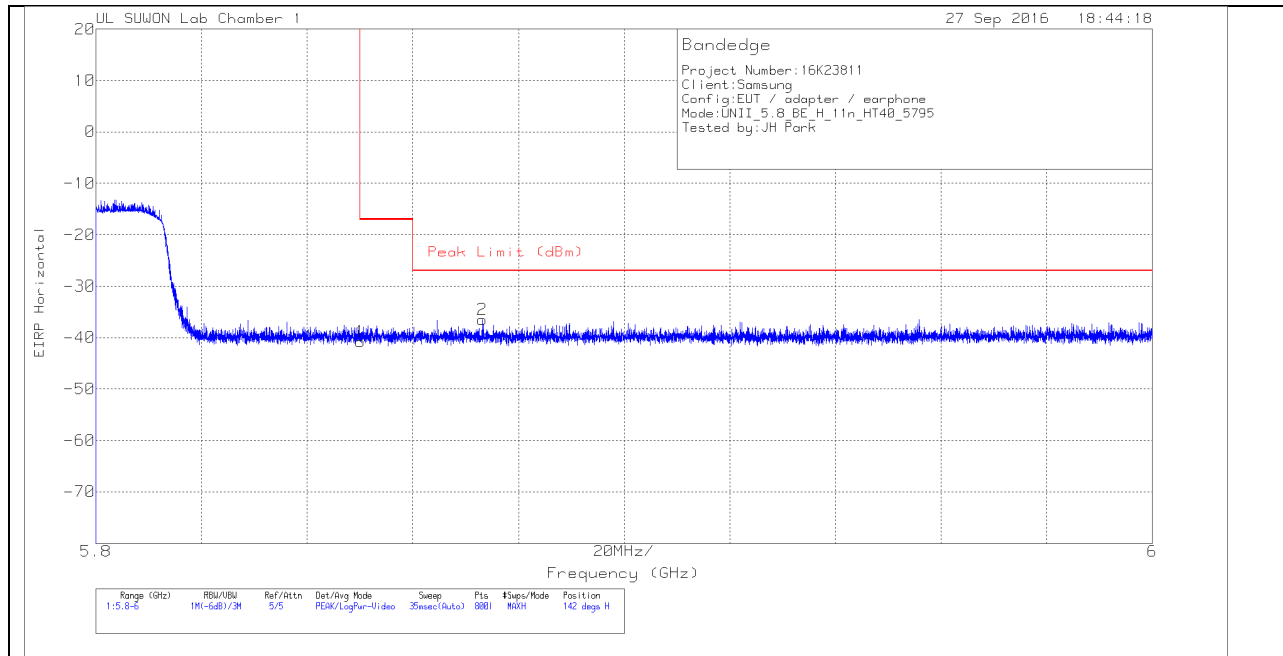


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.32	Pk	34.9	-22.2	11.8	0	-40.82	-17	-23.82	142	100	H
2	5.873	-60.88	Pk	34.9	-22.3	11.8	0	-36.48	-27	-9.48	142	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

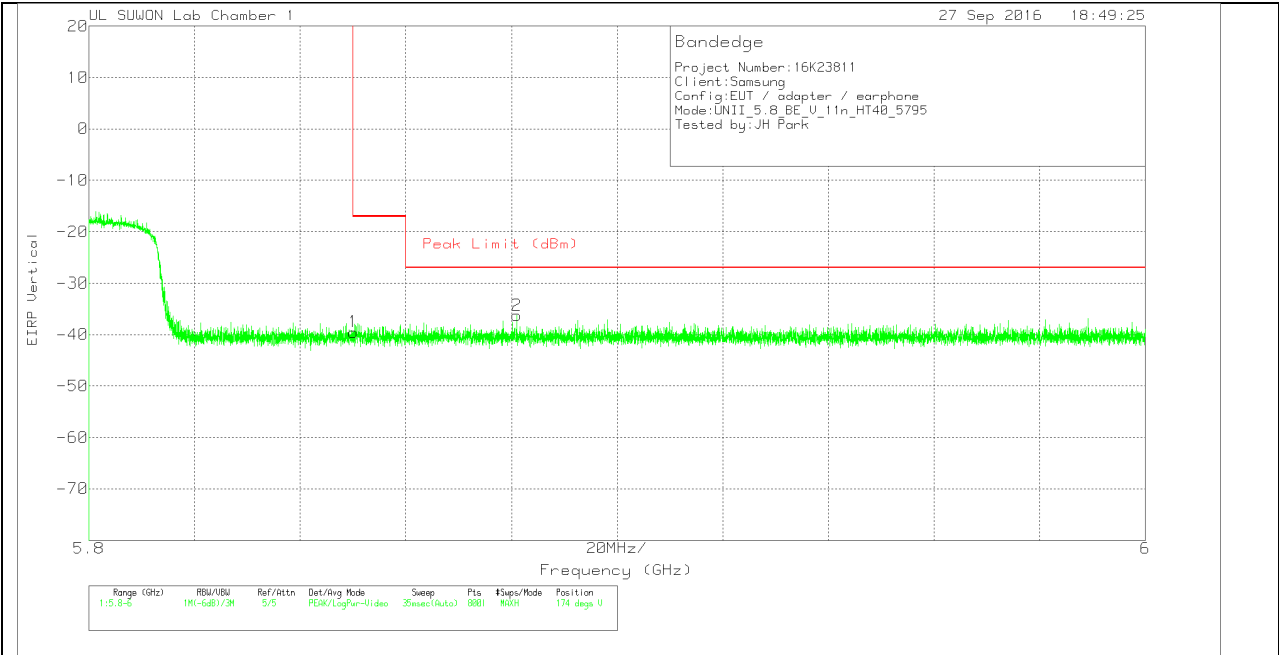


VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.99	Pk	34.9	-22.2	11.8	0	-39.49	-17	-22.49	174	373	V
2	5.881	-60.64	Pk	34.9	-22.3	11.8	0	-36.24	-27	-9.24	174	373	V

Pk - Peak detector

LOW CHANNEL HORIZONTAL

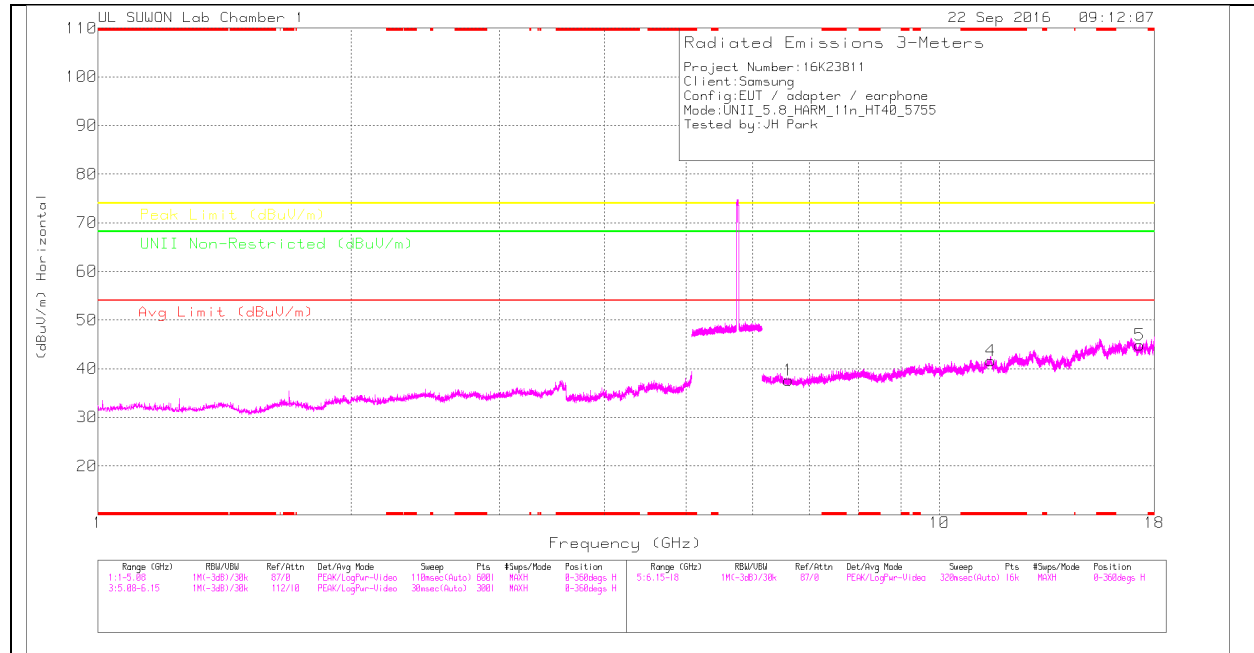

LOW CHANNEL VERTICAL

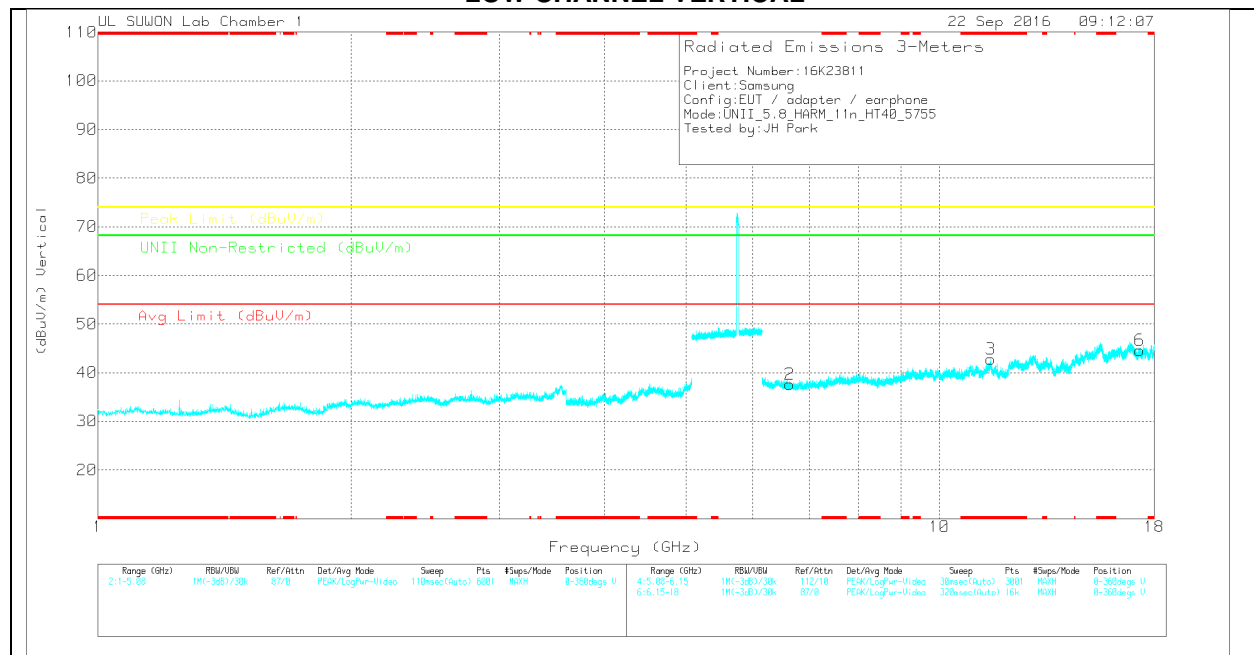

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	31170016 87171_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.614	32.81	PK	35.5	-30.7	0	37.61	-	-	-	-	68.2	-30.59	0-360	250	H
4	* 11.512	29.88	PK	38.6	-26.8	0	41.68	-	-	74	-32.32	-	-	0-360	250	H
5	17.298	25.77	PK	41.2	-22.1	0	44.87	-	-	-	-	68.2	-23.33	0-360	150	H
2	6.636	32.91	PK	35.5	-30.8	0	37.61	-	-	-	-	68.2	-30.59	0-360	250	V
3	* 11.516	31.04	PK	38.6	-26.8	0	42.84	-	-	74	-31.16	-	-	0-360	150	V
6	17.288	25.2	PK	41.2	-21.8	0	44.6	-	-	-	-	68.2	-23.6	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

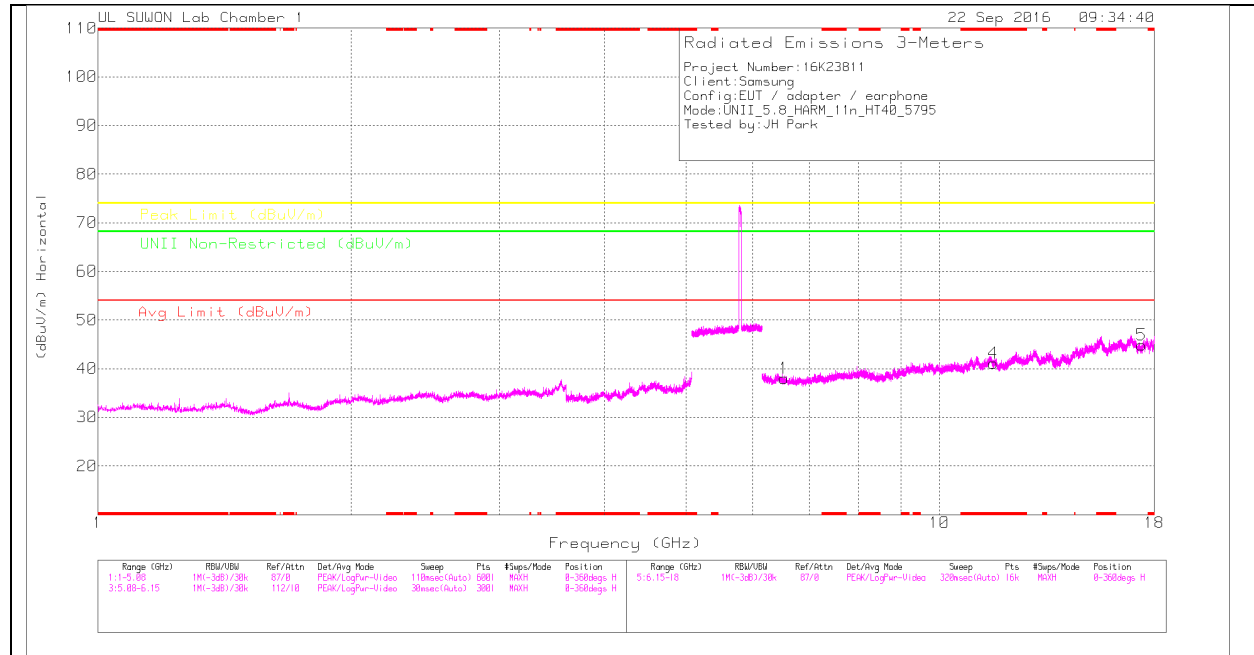

HIGH CHANNEL VERTICAL

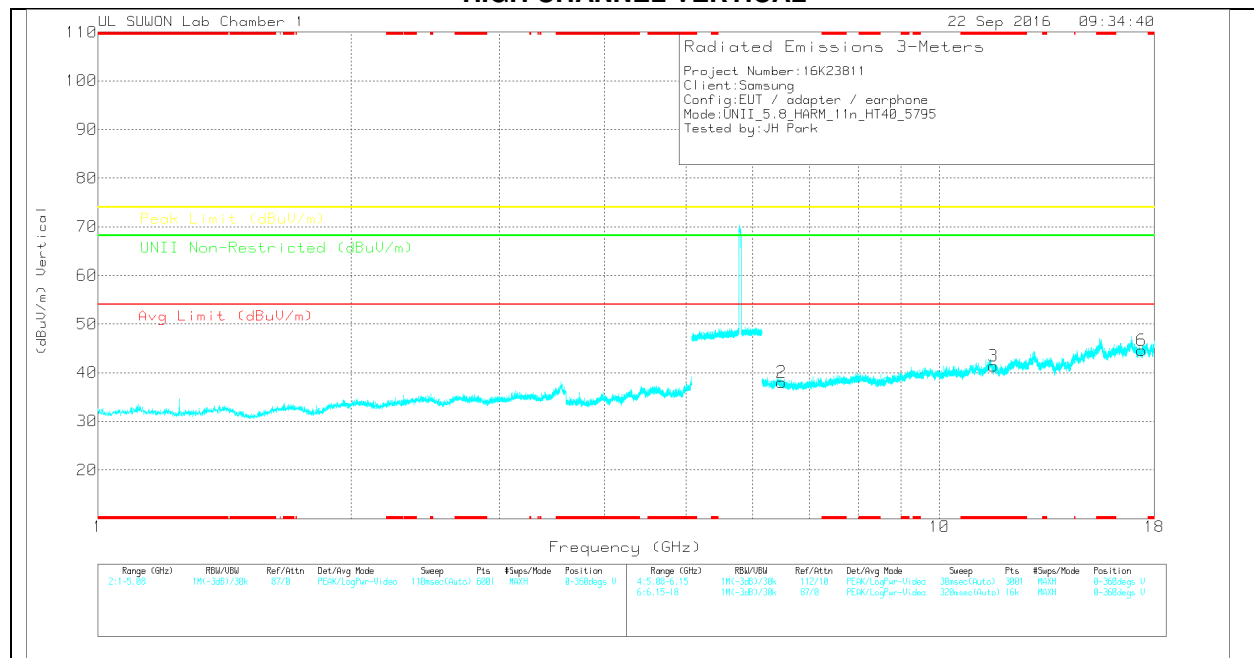

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	31170016 87171150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.538	33.21	PK	35.5	-30.7	0	38.01	-	-	-	-	68.2	-30.19	0-360	150	H
4	* 11.588	29.96	PK	38.7	-27.5	0	41.16	-	-	74	-32.84	-	-	0-360	150	H
5	17.377	25.1	PK	41.2	-21.4	0	44.9	-	-	-	-	68.2	-23.3	0-360	150	H
2	6.493	33.26	PK	35.4	-30.6	0	38.06	-	-	-	-	68.2	-30.14	0-360	250	V
3	* 11.585	30.18	PK	38.7	-27.5	0	41.38	-	-	74	-32.62	-	-	0-360	250	V
6	17.374	24.79	PK	41.2	-21.4	0	44.59	-	-	-	-	68.2	-23.61	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.4.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.8GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

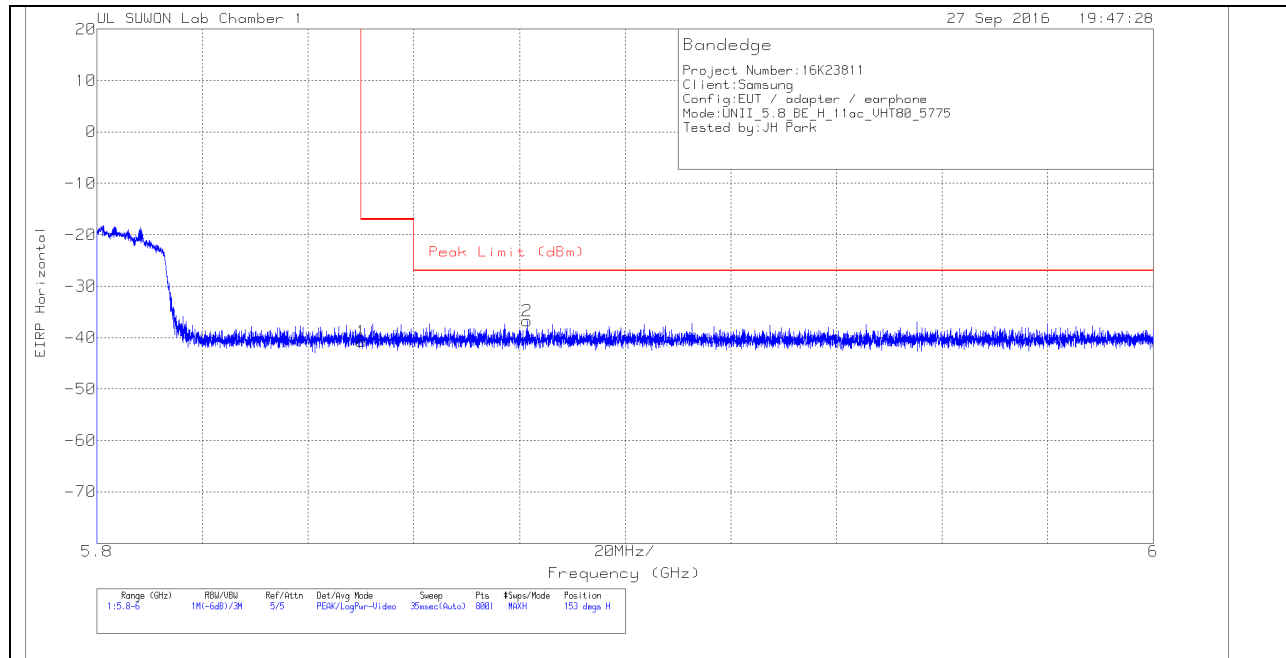


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.33	Pk	34.9	-22.2	11.8	0	-40.83	-17	-23.83	153	100	H
2	5.881	-61.15	Pk	34.9	-22.3	11.8	0	-36.75	-27	-9.75	153	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

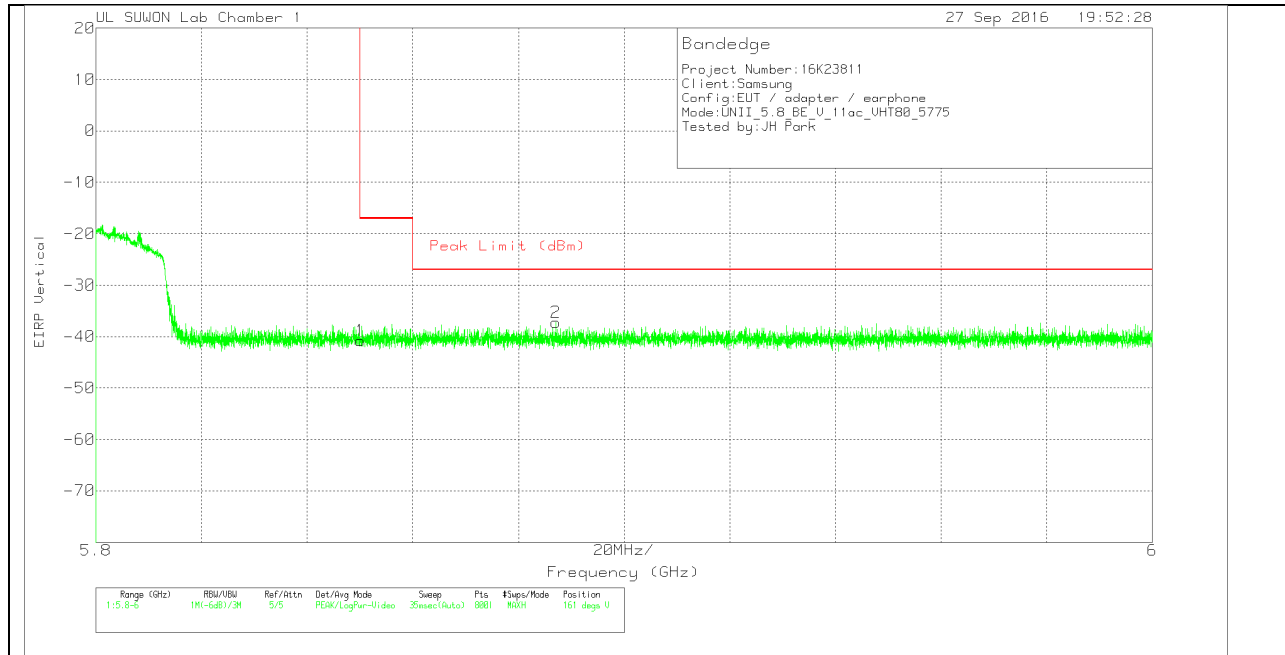


VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.29	Pk	34.9	-22.2	11.8	0	-40.79	-17	-23.79	161	336	V
2	5.887	-61.62	Pk	34.9	-22.3	11.8	0	-37.22	-27	-10.22	161	336	V

Pk - Peak detector

MID CHANNEL HORIZONTAL

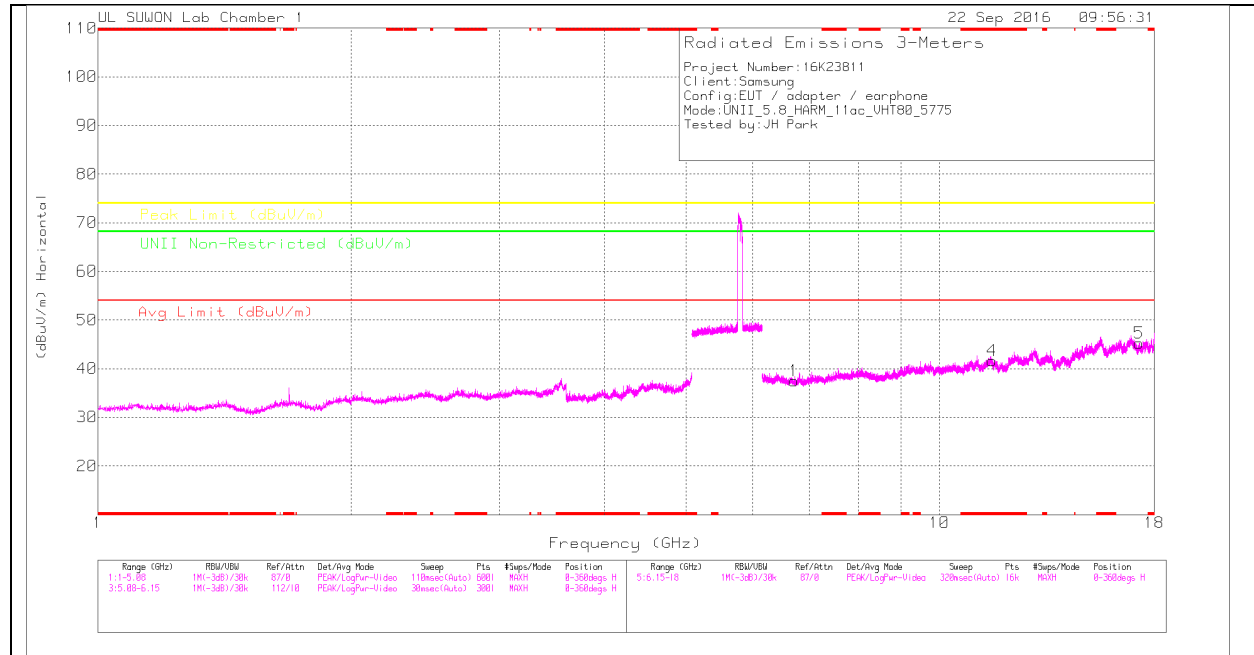

MID CHANNEL VERTICAL

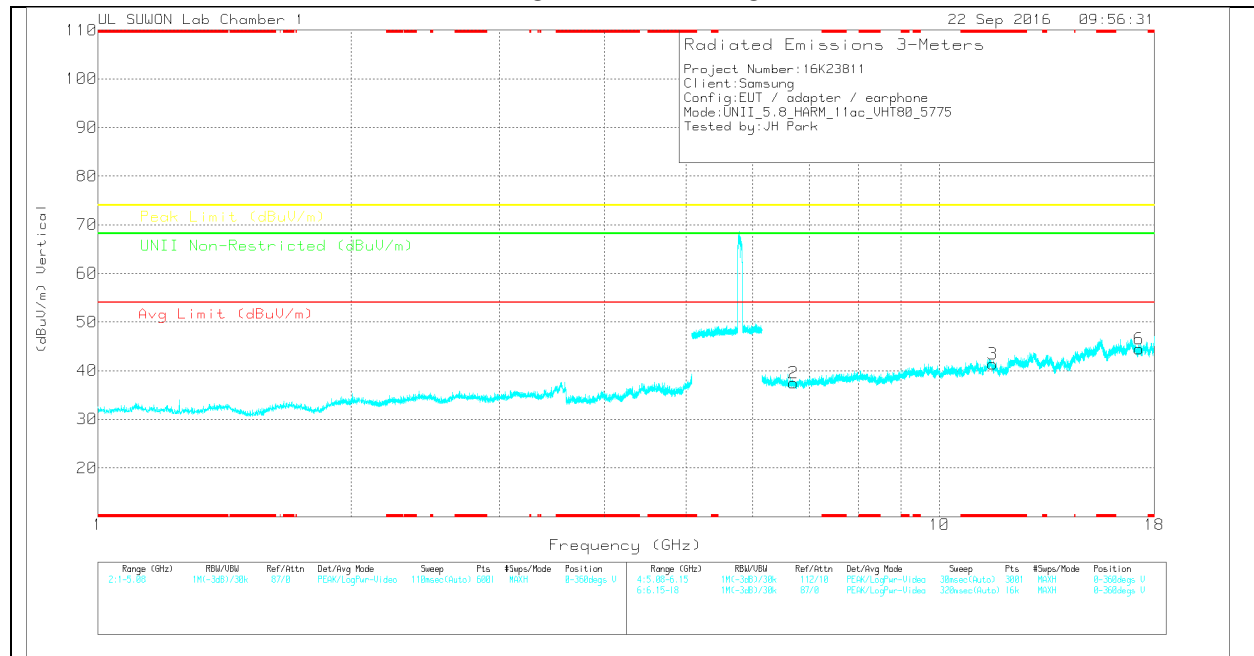

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.717	32.8	PK	35.5	-30.8	0	37.5	-	-	-	-	68.2	-30.7	0-360	250	H
4	* 11.555	29.94	PK	38.6	-26.9	0	41.64	-	-	74	-32.36	-	-	0-360	250	H
5	17.259	25.6	PK	41.2	-21.5	0	45.3	-	-	-	-	68.2	-22.9	0-360	150	H
2	6.708	32.79	PK	35.5	-30.8	0	37.49	-	-	-	-	68.2	-30.71	0-360	250	V
3	* 11.559	29.66	PK	38.7	-27	0	41.36	-	-	74	-32.64	-	-	0-360	250	V
6	17.261	24.75	PK	41.2	-21.5	0	44.45	-	-	-	-	68.2	-23.75	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

12. WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

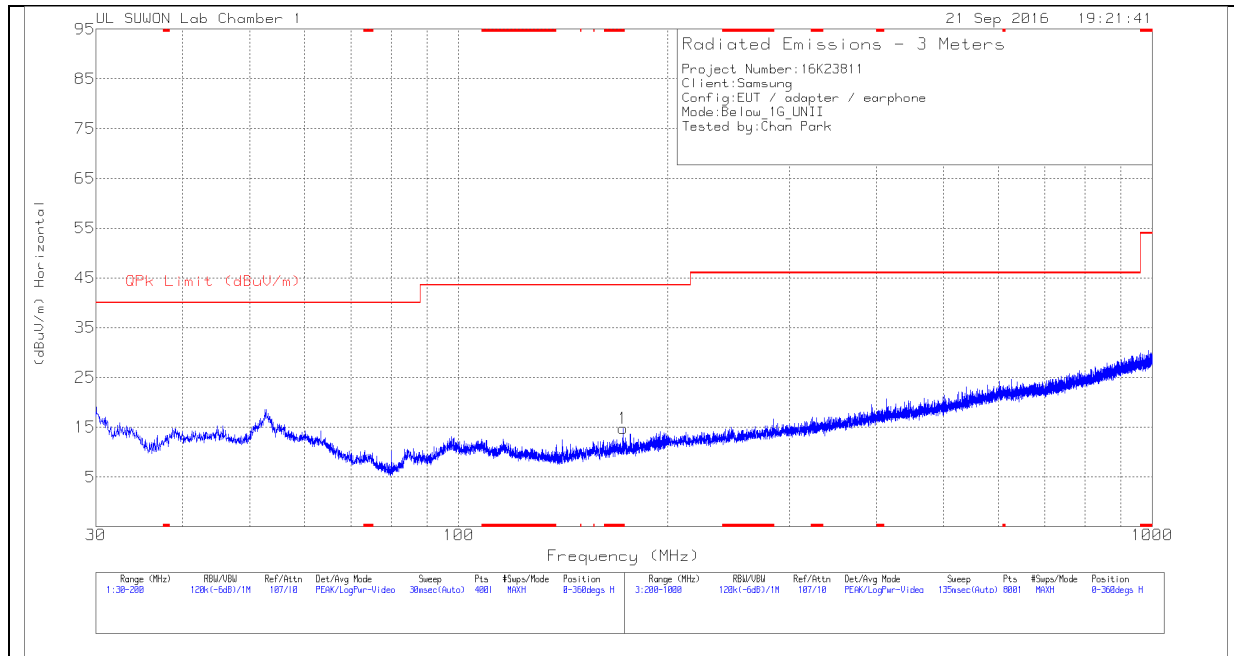

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

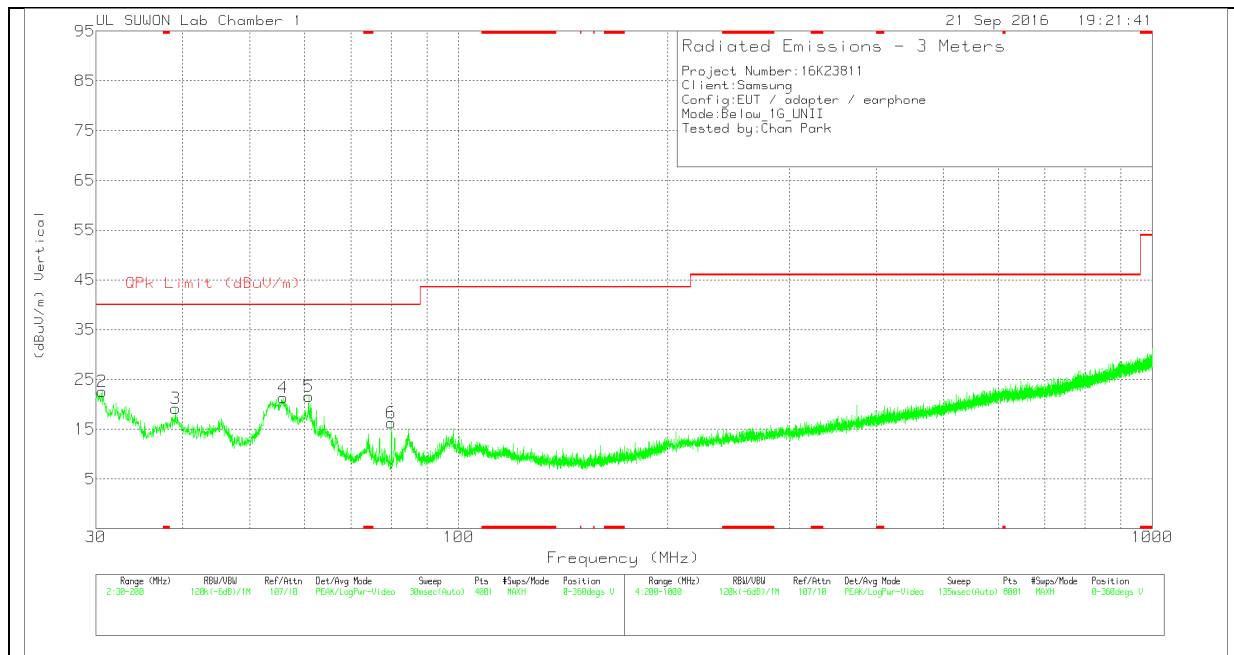

Below 1G Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 172.46	34.01	Pk	9.1	-28.4	14.71	43.52	-28.81	0-360	300	H
2	30.595	42.78	Pk	10.3	-30.5	22.58	40	-17.42	0-360	100	V
3	39.0525	37.38	Pk	12.1	-30.3	19.18	40	-20.82	0-360	100	V
4	55.7975	38.12	Pk	13.2	-30	21.32	40	-18.68	0-360	100	V
5	60.77	39.06	Pk	12.4	-29.9	21.56	40	-18.44	0-360	100	V
6	79.98	38.93	Pk	6.9	-29.6	16.23	40	-23.77	0-360	200	V
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

13. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

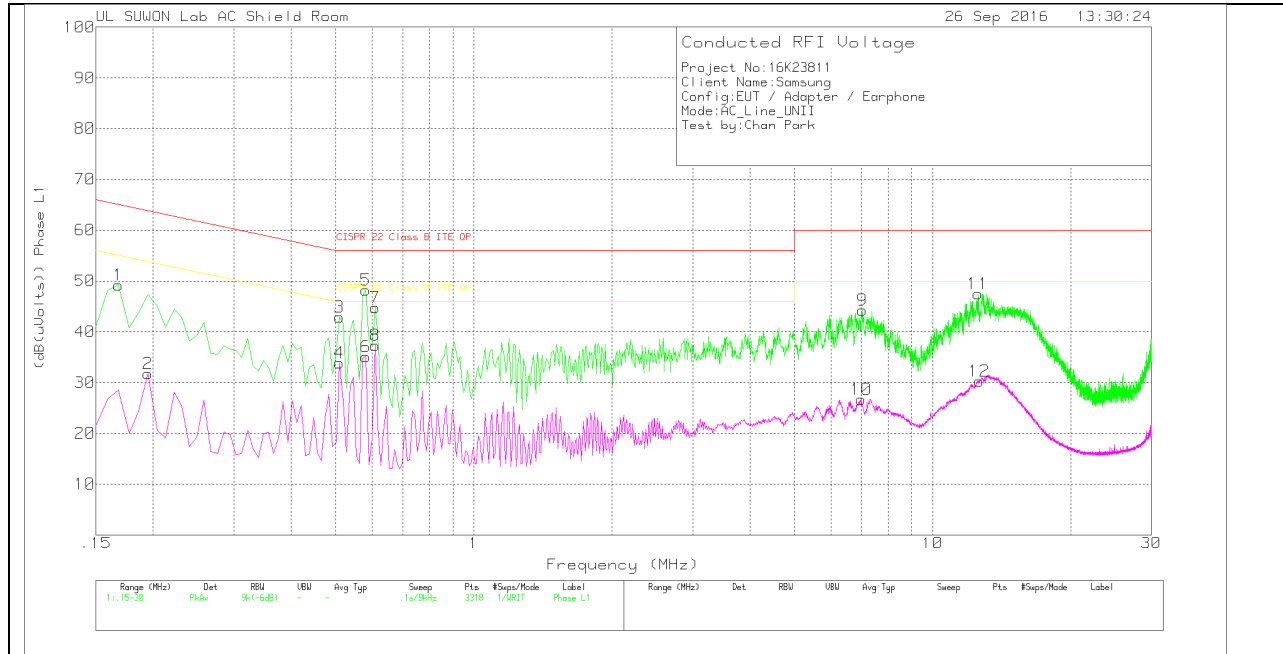

LINE 1 RESULTS

Trace Markers


Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_L1	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.168	39	Pk	10.2	0	49.2	65.06	-15.86	-	-
2	.195	21.79	Av	10	0	31.79	-	-	53.82	-22.03
3	.51	32.65	Pk	10.2	0	42.85	56	-13.15	-	-
4	.51	23.71	Av	10.2	0	33.91	-	-	46	-12.09
5	.582	38.1	Pk	10.1	0	48.2	56	-7.8	-	-
6	.582	24.98	Av	10.1	0	35.08	-	-	46	-10.92
7	.609	34.7	Pk	10.1	0	44.8	56	-11.2	-	-
8	.609	27.25	Av	10.1	0	37.35	-	-	46	-8.65
9	7.026	34.21	Pk	9.9	.1	44.21	60	-15.79	-	-
10	6.981	16.71	Av	9.9	.1	26.71	-	-	50	-23.29
11	12.552	37.15	Pk	10.1	.2	47.45	60	-12.55	-	-
12	12.642	19.98	Av	10.1	.2	30.28	-	-	50	-19.72

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

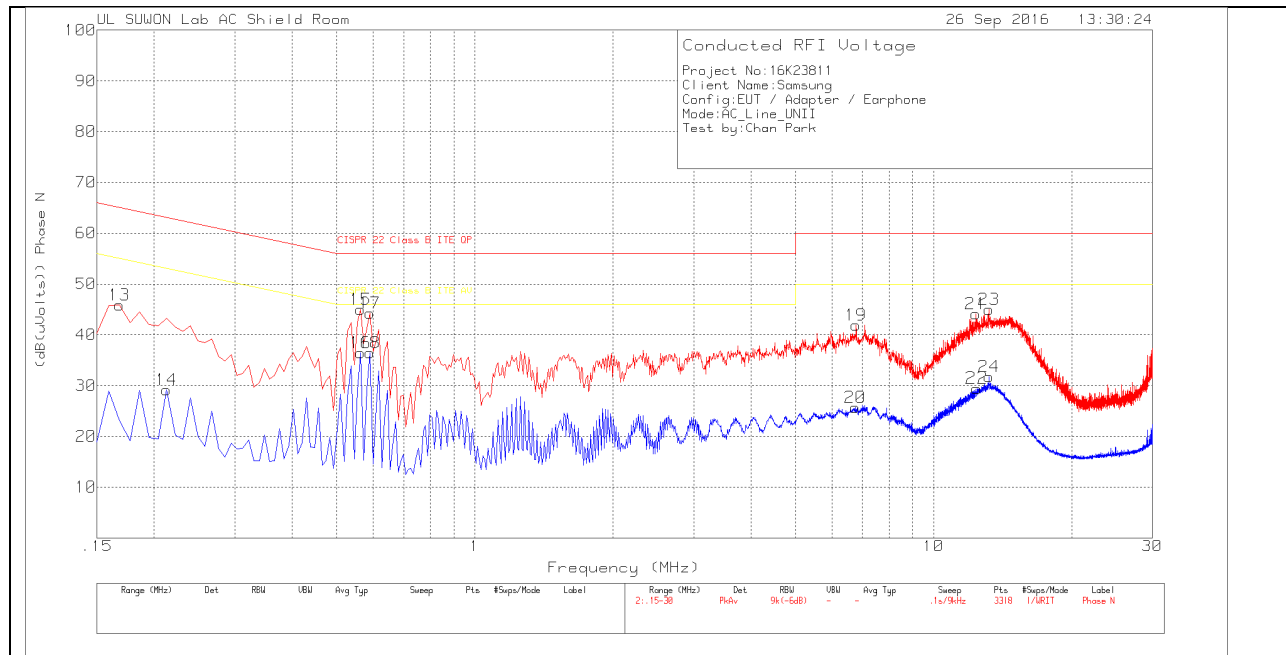

LINE 2 RESULTS

Trace Markers

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_N	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.168	35.71	Pk	10.2	0	45.91	65.06	-19.15	-	-
14	.213	19.25	Av	9.9	0	29.15	-	-	53.09	-23.94
15	.564	34.89	Pk	10.1	0	44.99	56	-11.01	-	-
16	.564	26.36	Av	10.1	0	36.46	-	-	46	-9.54
17	.591	34.19	Pk	10.1	0	44.29	56	-11.71	-	-
18	.591	26.36	Av	10.1	0	36.46	-	-	46	-9.54
19	6.783	31.85	Pk	9.9	.1	41.85	60	-18.15	-	-
20	6.747	15.69	Av	9.9	.1	25.69	-	-	50	-24.31
21	12.363	33.71	Pk	10.2	.2	44.11	60	-15.89	-	-
22	12.426	19.07	Av	10.2	.2	29.47	-	-	50	-20.53
23	13.209	34.64	Pk	10.2	.2	45.04	60	-14.96	-	-
24	13.218	21.34	Av	10.2	.2	31.74	-	-	50	-18.26

Pk - Peak detector

Av - Average detection

14. DYNAMIC FREQUENCY SELECTION

14.1. OVERVIEW

14.1.1. LIMITS

FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.		

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see notes)
E.I.R.P. $\geq$ 200 mill watt	-64 dBm
E.I.R.P. $<$ 200 mill watt and power spectral density $<$ 10 dBm/MHz	-62 dBm
E.I.R.P. $<$ 200 mill watt that do not meet power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds (See Note 1)
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. (See Note 3)
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests.					

Table 6 – Long Pulse Radar Test Signal


Radar Waveform Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

14.1.1. TEST AND MEASUREMENT SYSTEM

CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

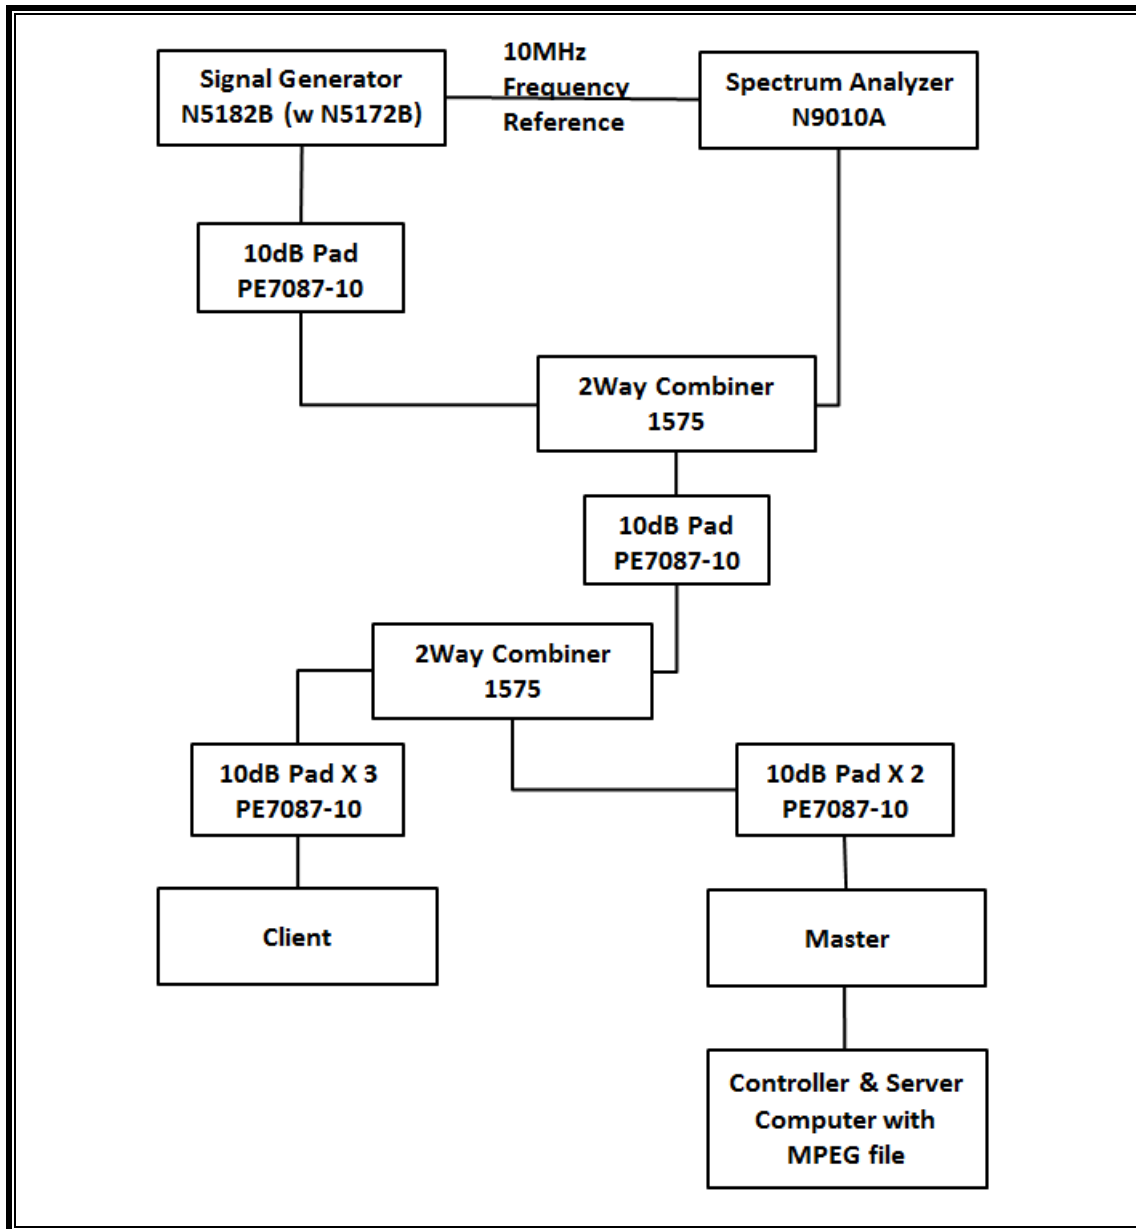

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the Keysite Signal Studio for Pulse Building as N5172B. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	Cal Due
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	08-17-17
Vector Signal Generator, 6GHz	Agilent / HP	N5182B	MY53051241	08-16-17

14.1.2. SETUP OF EUT

CONDUCTED METHOD EUT TEST SETUP

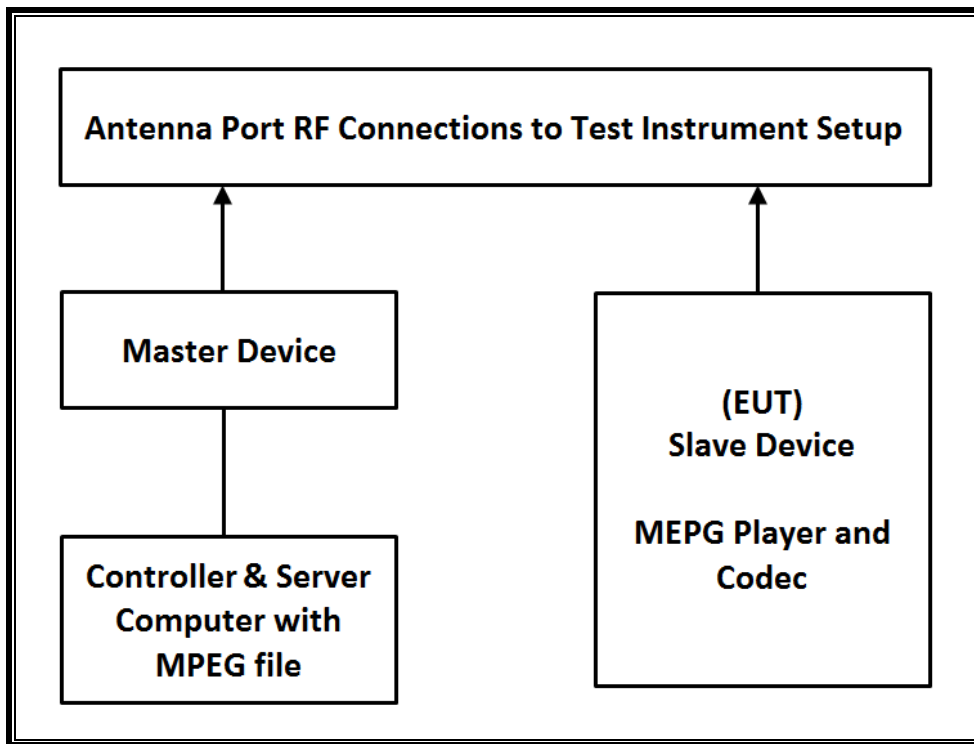

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point	Cisco	AIR-CAP3702E-A-K9	FTX182276QX	LDK102087
Notebook PC (Controller/Server)	HP	HP EliteDesk 800 G1 TWR	CZC4125J25	DoC

14.1.3. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 13.21 dBm in the 5250-5350 MHz band and 13.28 dBm in the 5470-5725 MHz band.

The antenna assembly utilized two antenna with the EUT is 2.83 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required conducted threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the controller/server PC to the EUT using iPerf version 2.0.5 software package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the access point is 12.4(25d)JA1.

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102087. The minimum antenna gain for the Master Device is 6 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.


14.2. RESULTS FOR 20 MHz BANDWIDTH

14.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

14.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

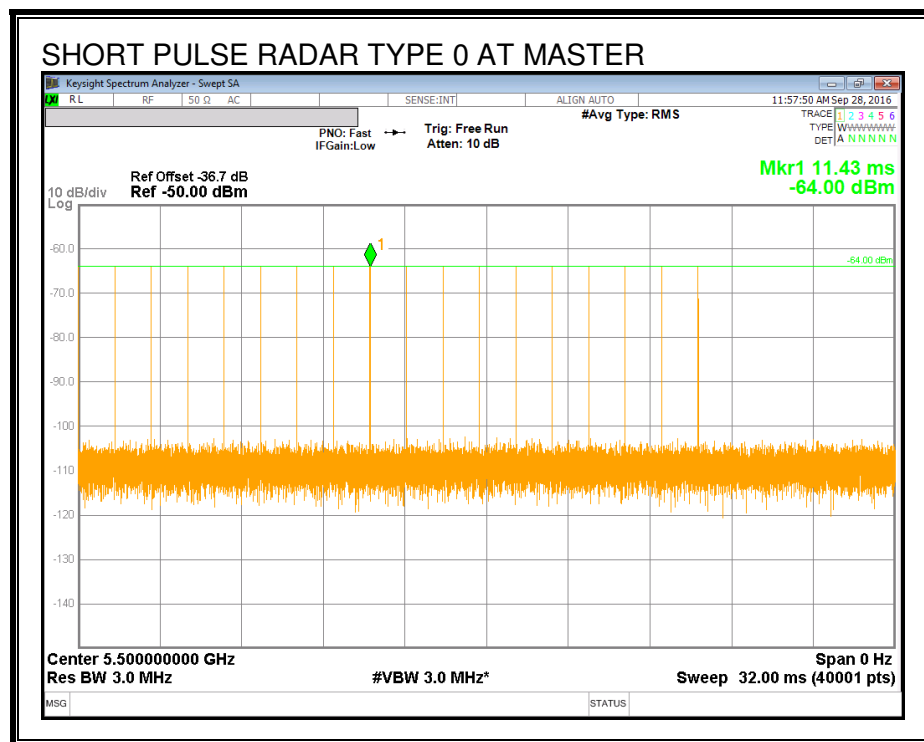

TRAFFIC

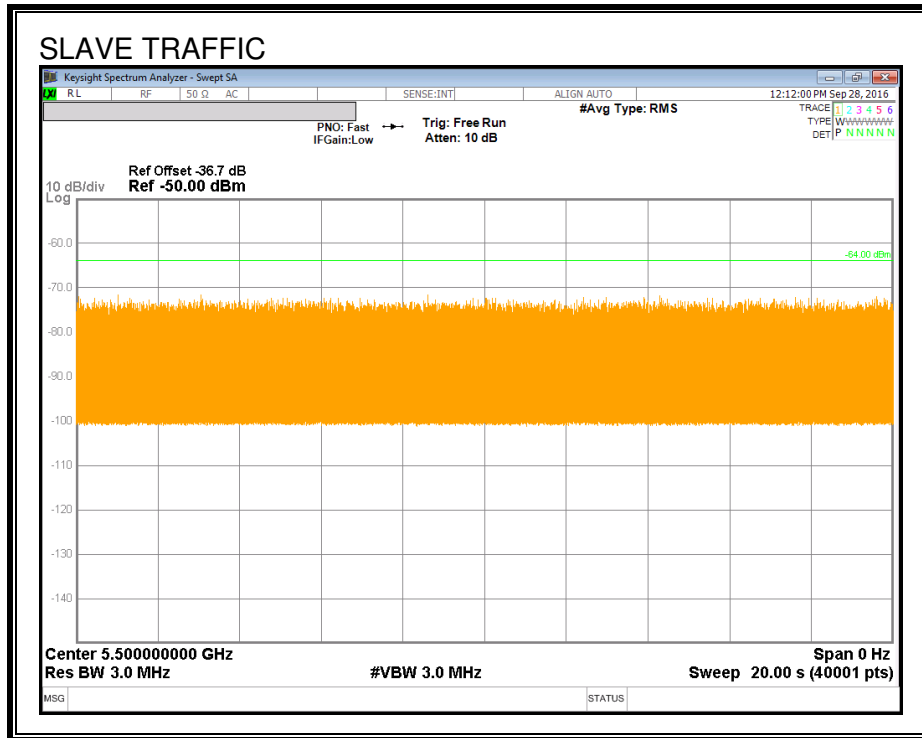

14.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.554	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
3.000	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

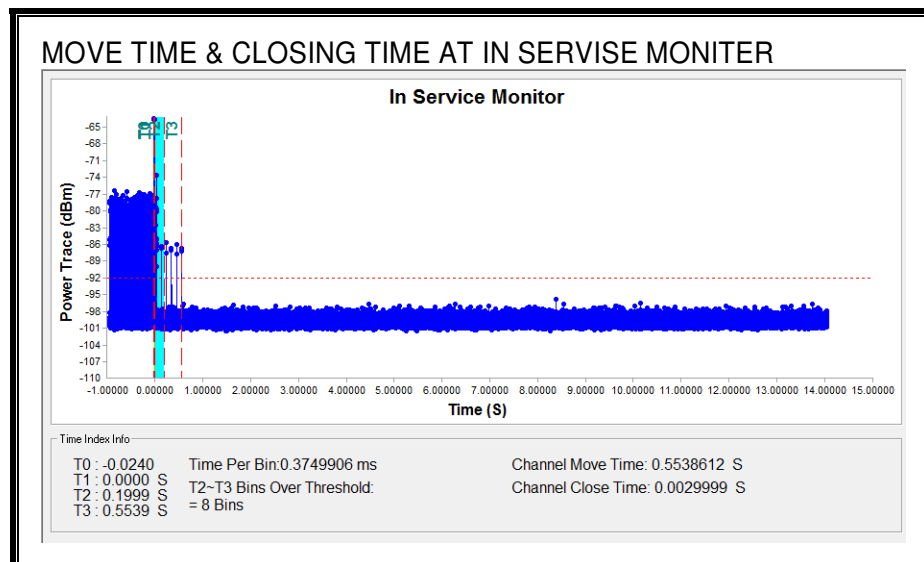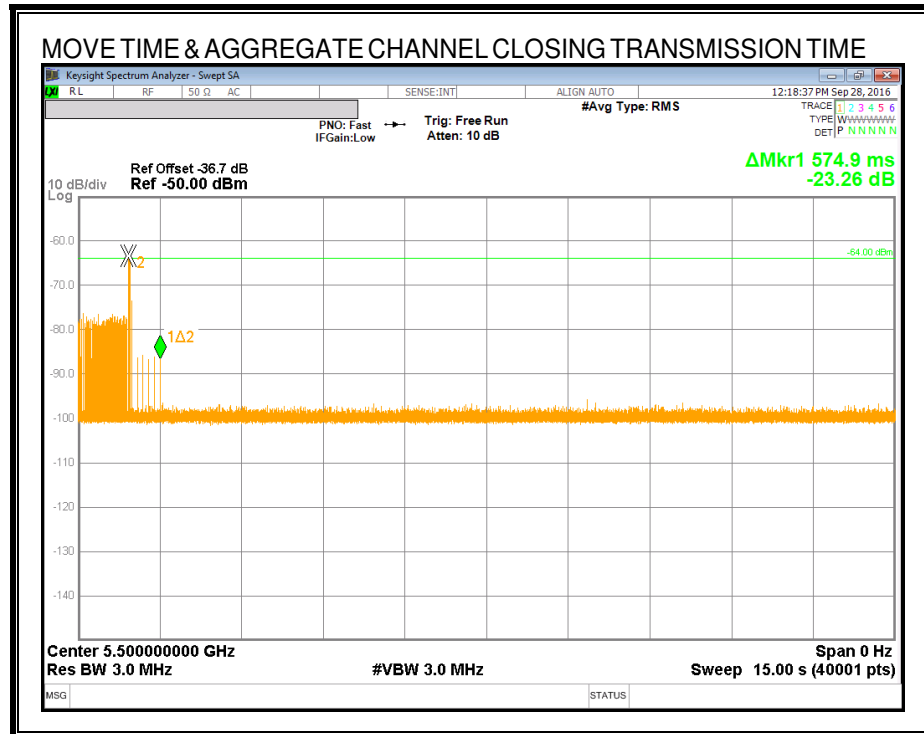

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

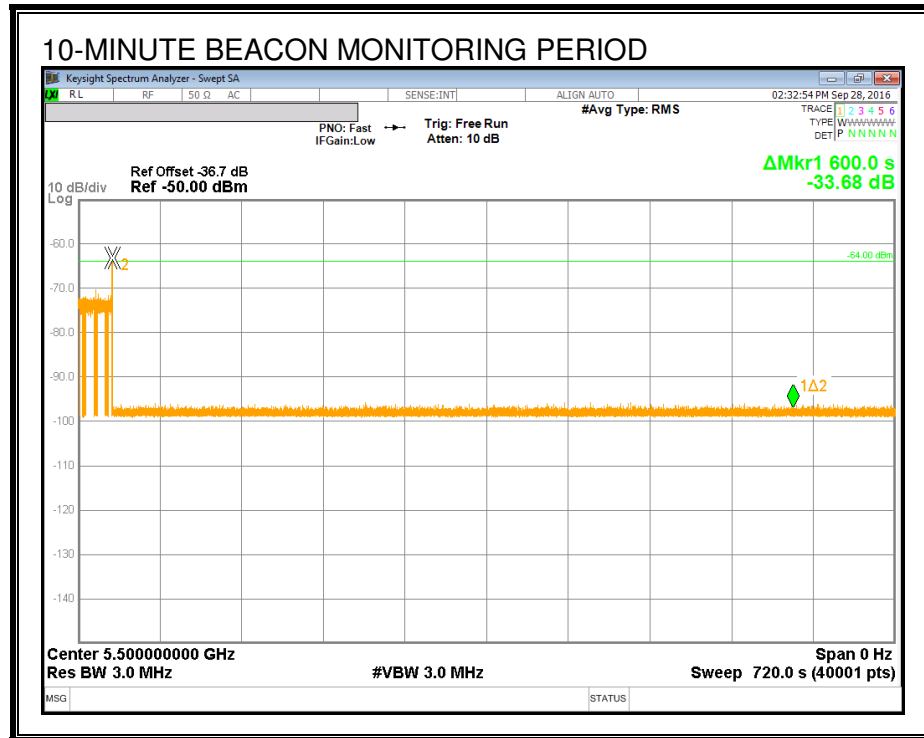


14.3. RESULTS FOR 40 MHz BANDWIDTH

14.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

14.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

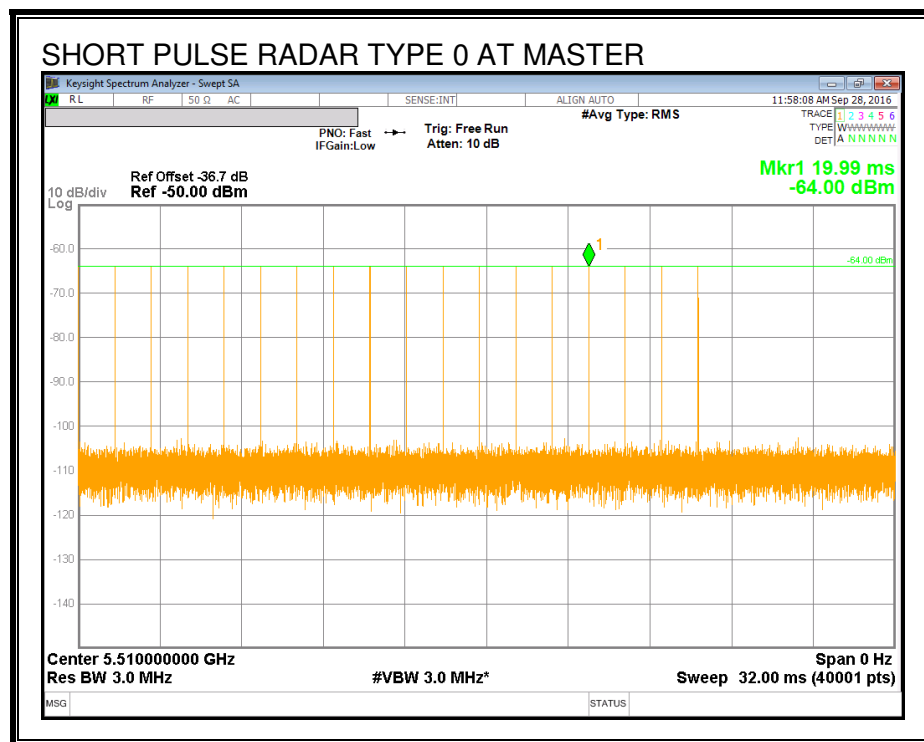

TRAFFIC

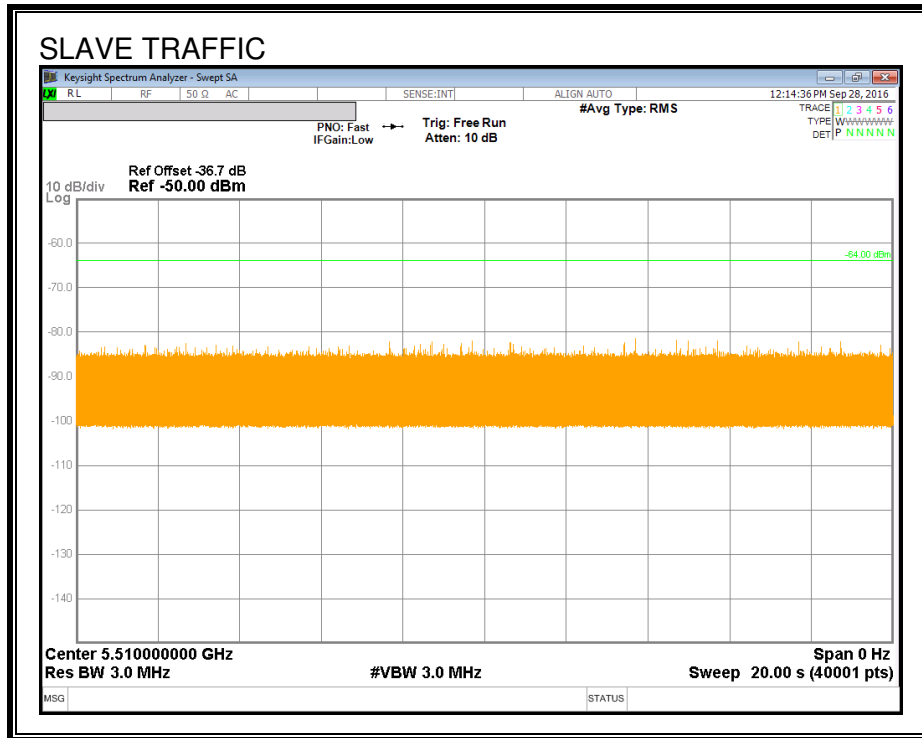

14.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.591	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
2.250	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

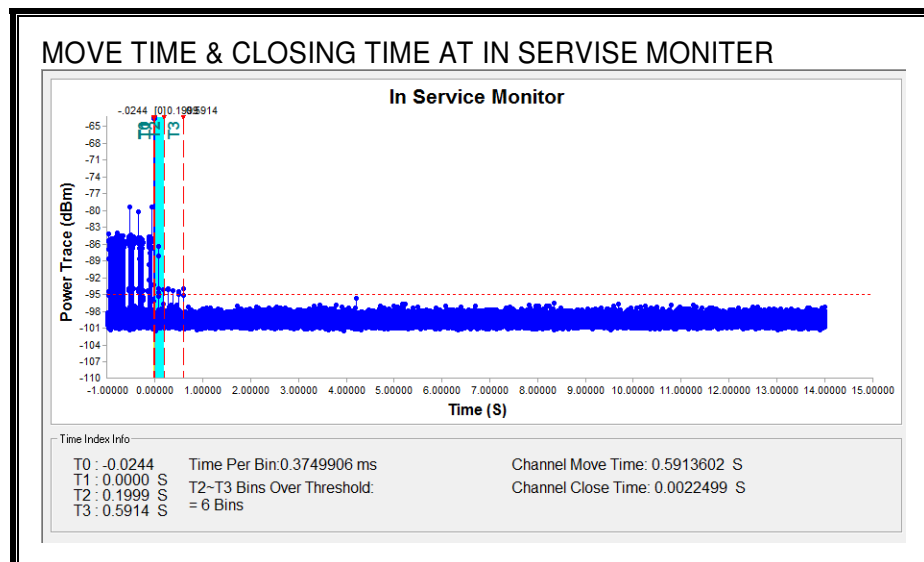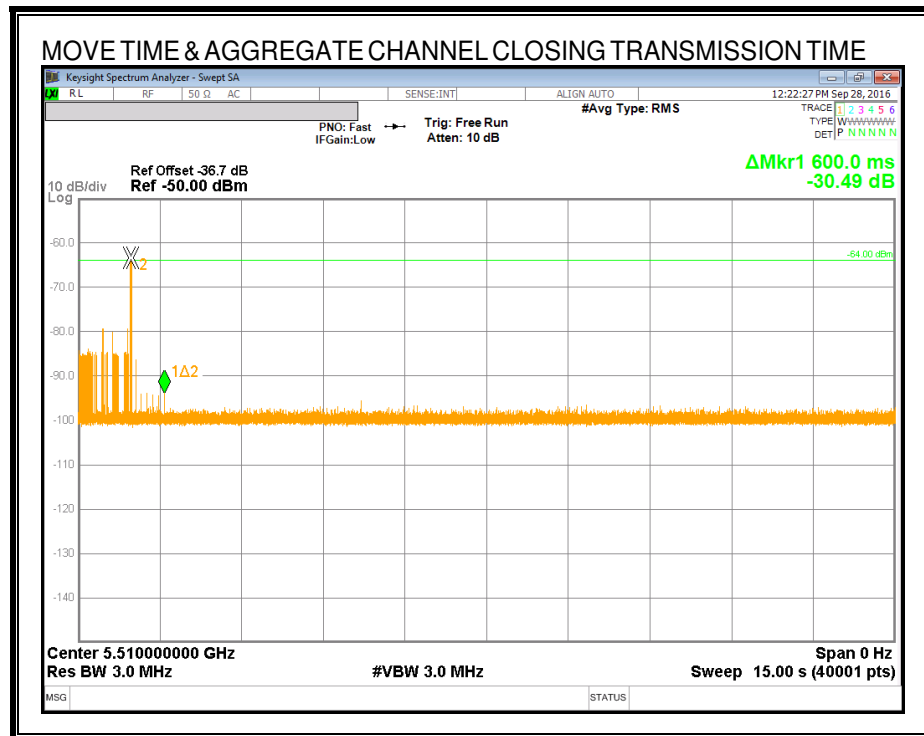

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

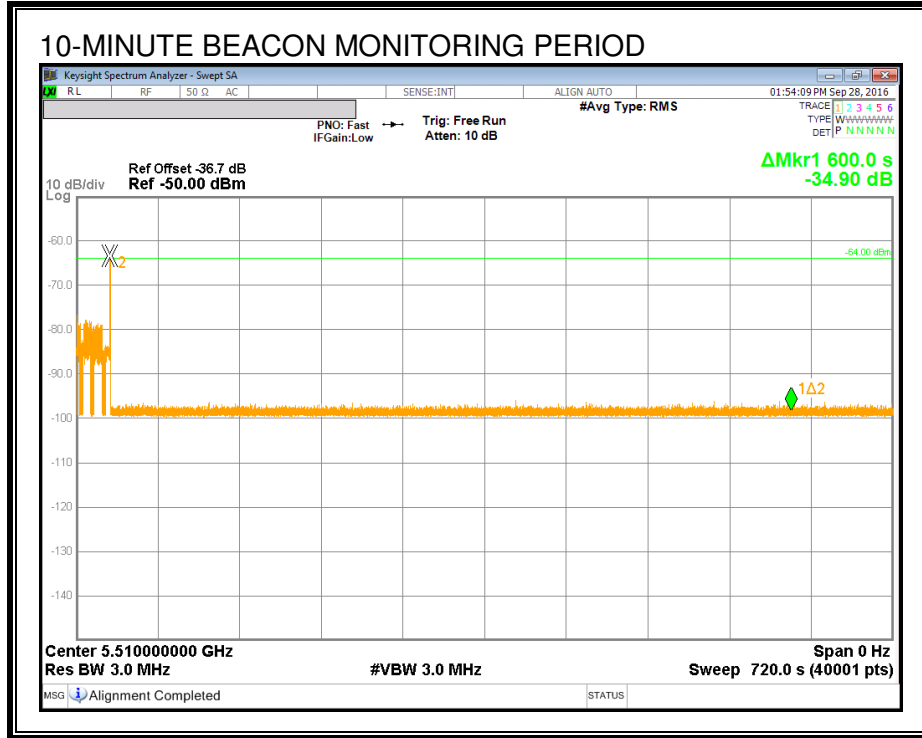


14.4. RESULTS FOR 80 MHz BANDWIDTH

14.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

14.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

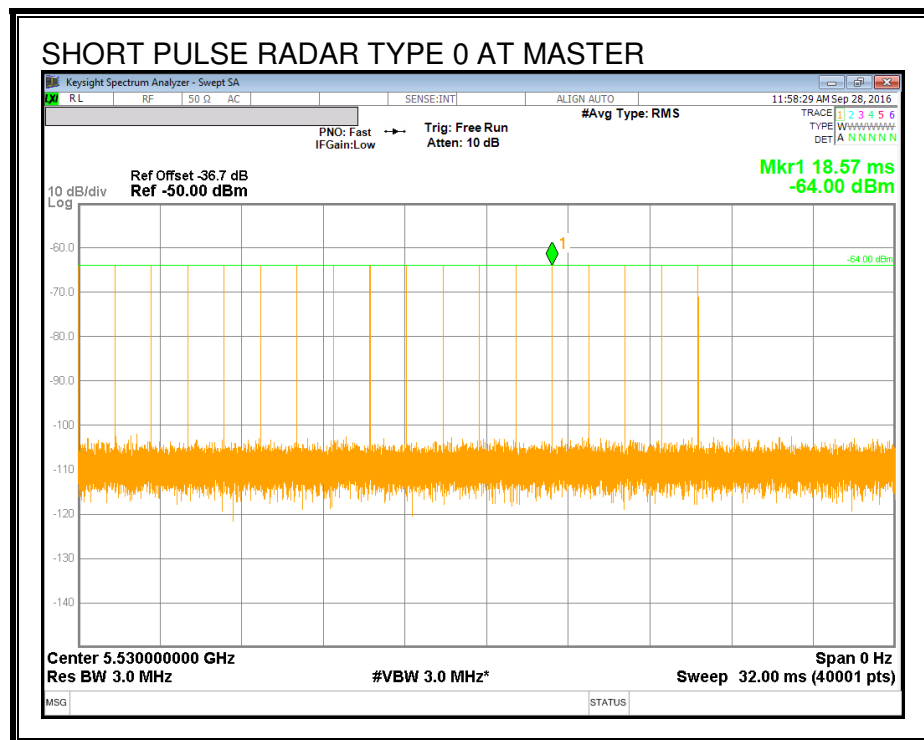

TRAFFIC

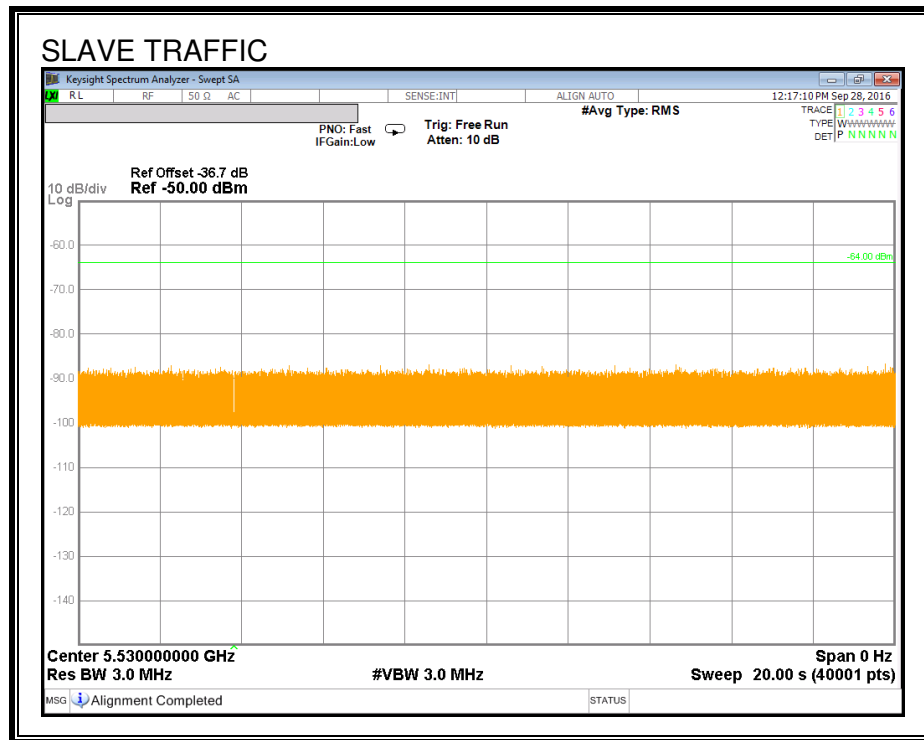

14.4.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.4.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
4.512	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.375	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

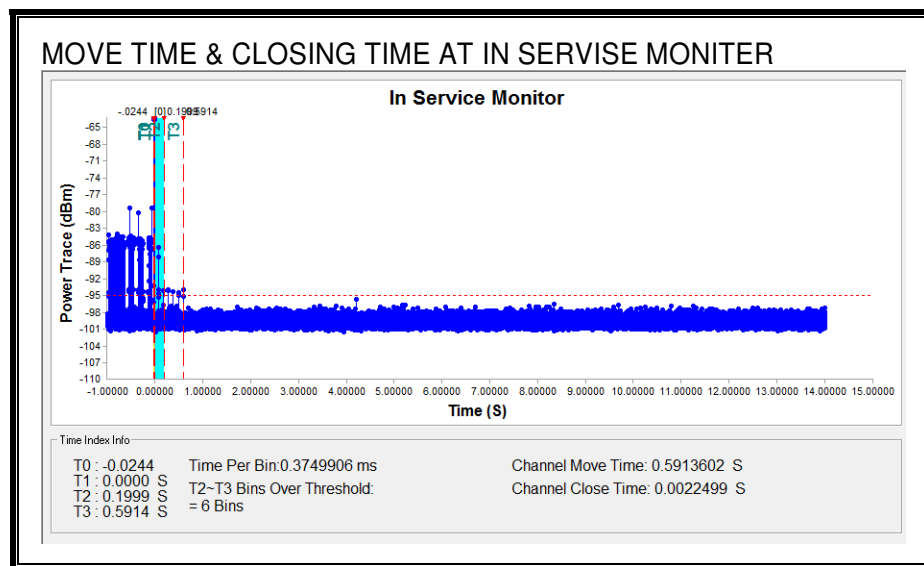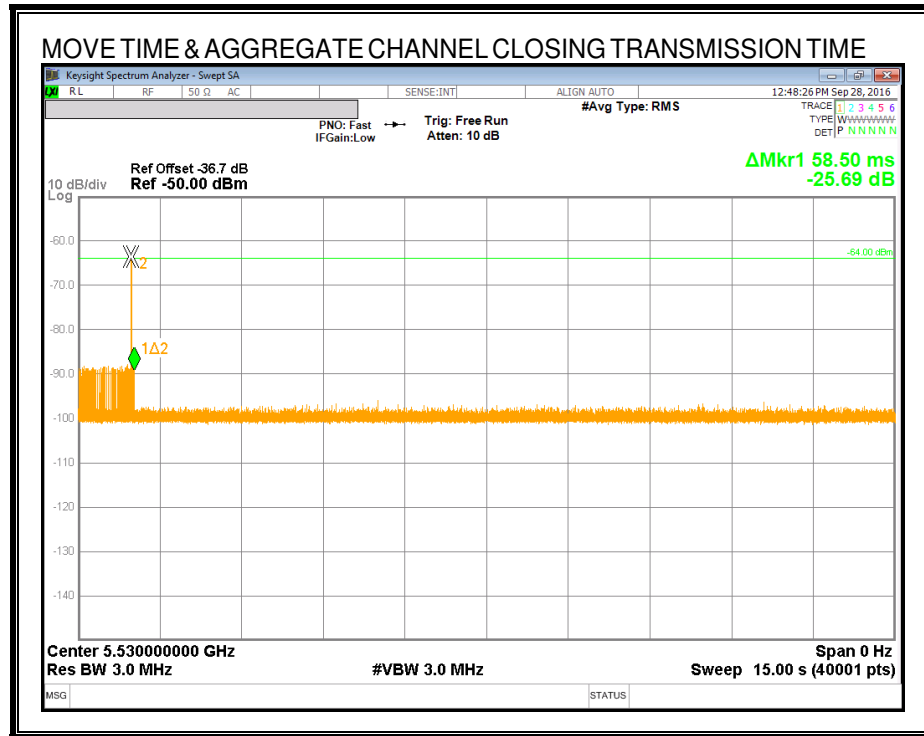

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

