

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.13$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/01/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 831.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.14 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.287 W/kg

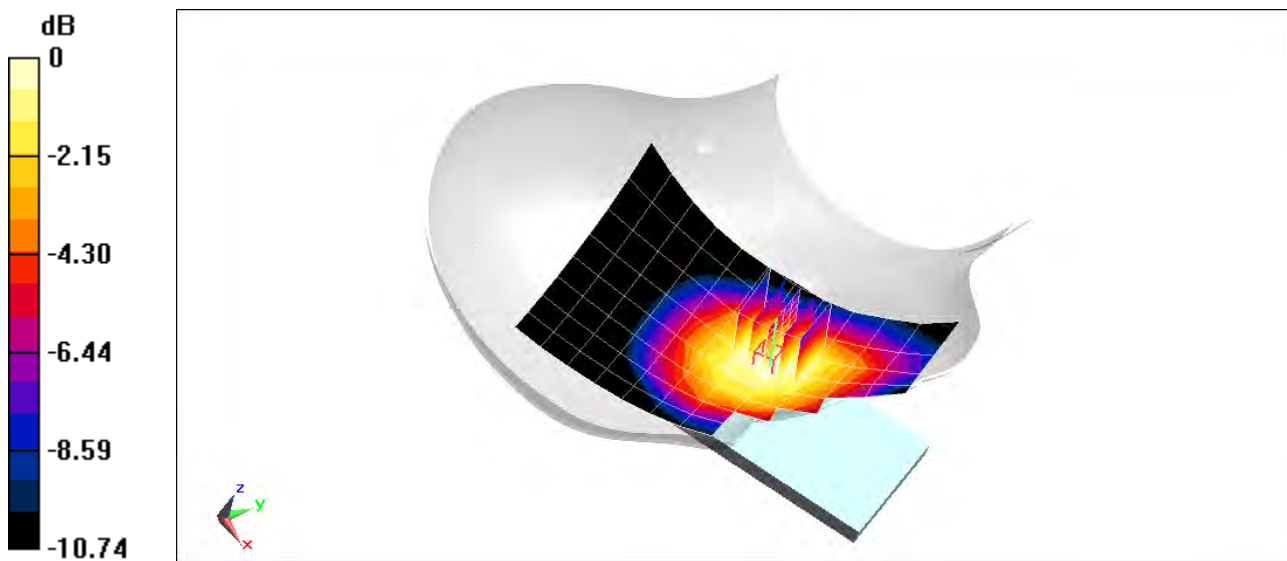

0 dB = 0.342 W/kg = -4.66 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17796

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.362 \text{ S/m}$; $\epsilon_r = 39.495$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7551; ConvF(8.34, 8.34, 8.34) @ 1745 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), CA_66C ULCA, Right Head, Cheek,

PCC: Ch. 132322, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch. 132124, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.32 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.155 W/kg

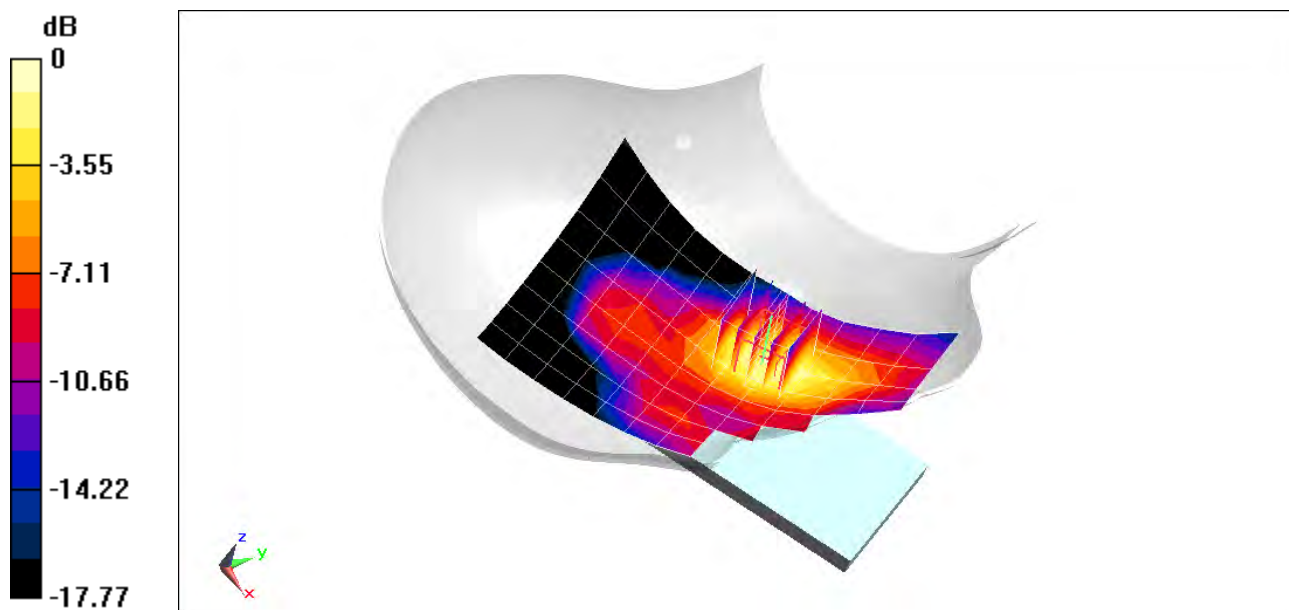

0 dB = 0.208 W/kg = -6.82 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17333

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 39.123$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/01/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1860 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Right Head, Cheek, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.228 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.084 W/kg

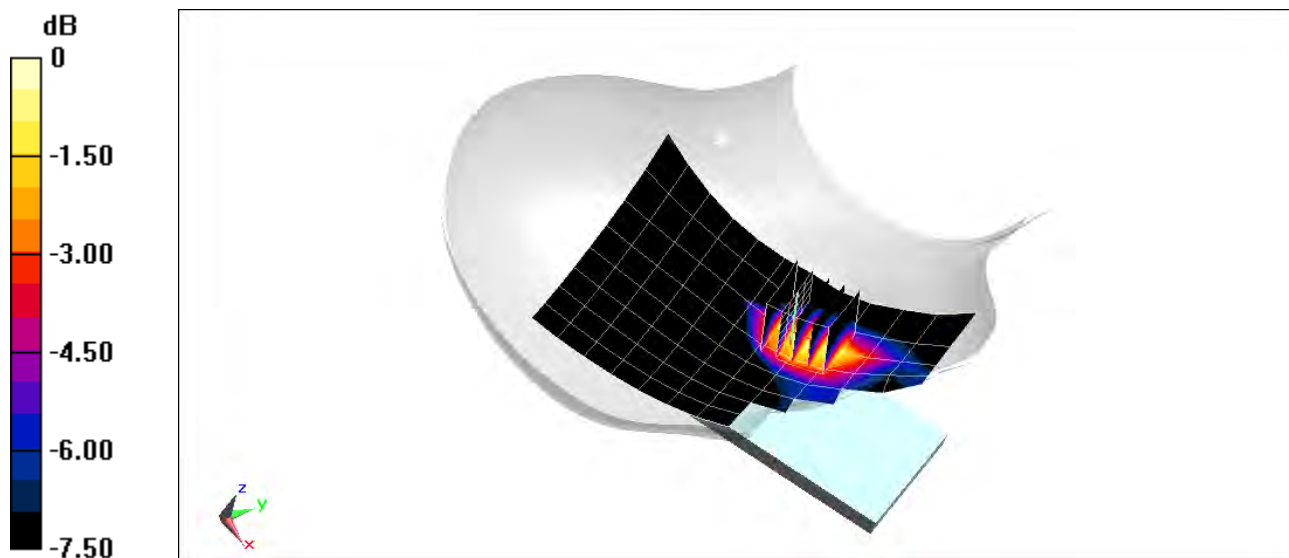

0 dB = 0.110 W/kg = -9.59 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12581

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.678 \text{ S/m}$; $\epsilon_r = 40.369$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/05/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3589; ConvF(7.11, 7.11, 7.11) @ 2310 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.909 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.030 W/kg

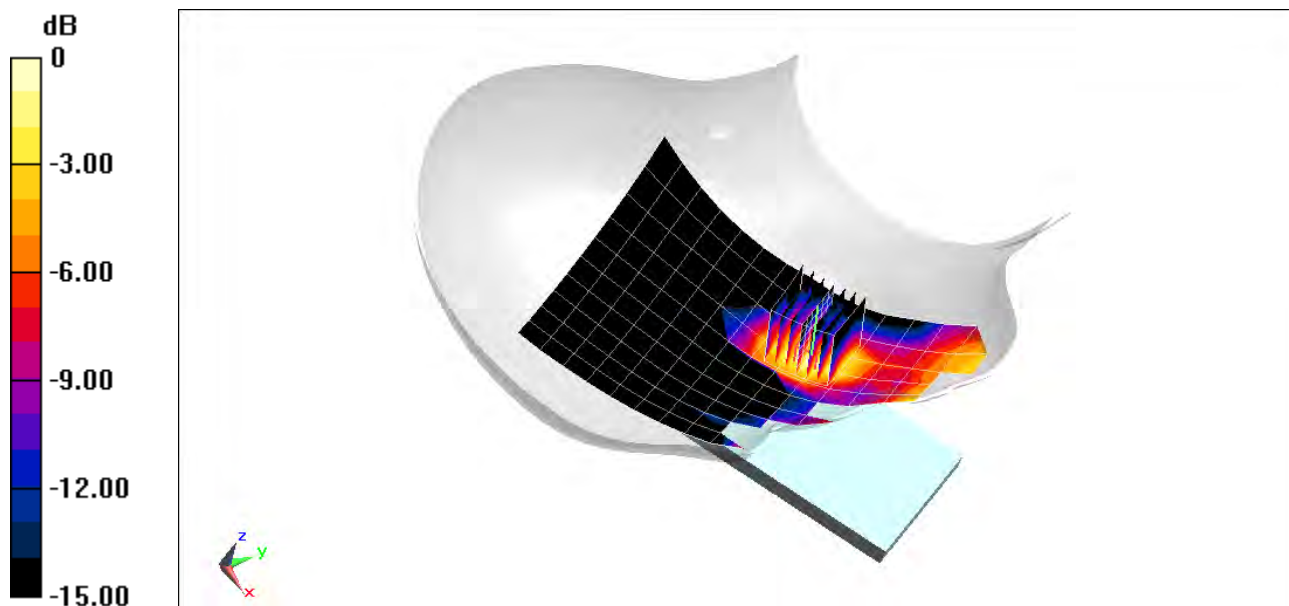

0 dB = 0.0465 W/kg = -13.33 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 18646

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2535 \text{ MHz}$; $\sigma = 1.863 \text{ S/m}$; $\epsilon_r = 39.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/03/2020; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2535 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Right Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.385 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.080 W/kg

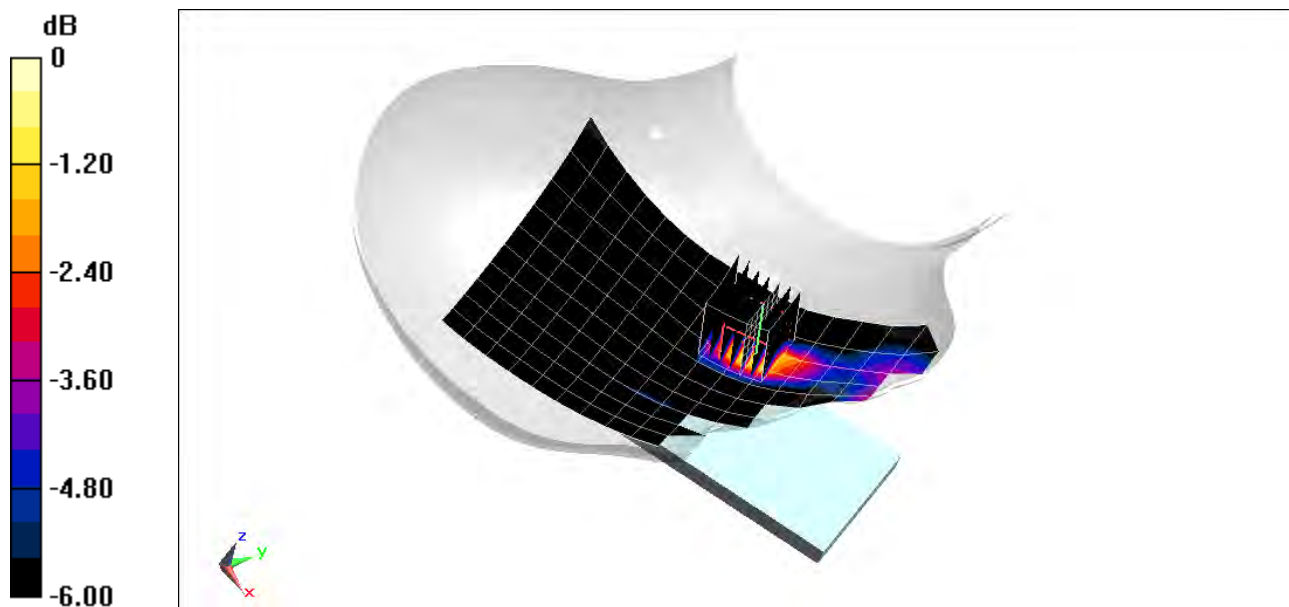

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17762

Communication System: UID 0, LTE Band 48; Frequency: 3603.3 MHz; Duty Cycle: 1:1.58

Medium: 3600 Head; Medium parameters used (interpolated):

$f = 3603.3 \text{ MHz}$; $\sigma = 2.931 \text{ S/m}$; $\epsilon_r = 38.703$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/30/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7488; ConvF(7.2, 7.2, 7.2) @ 3603.3 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 left 20; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, ULCA, Right Head, Cheek,

PCC: Ch. 55773, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

PCC: Ch. 55575, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 14.82 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.503 W/kg

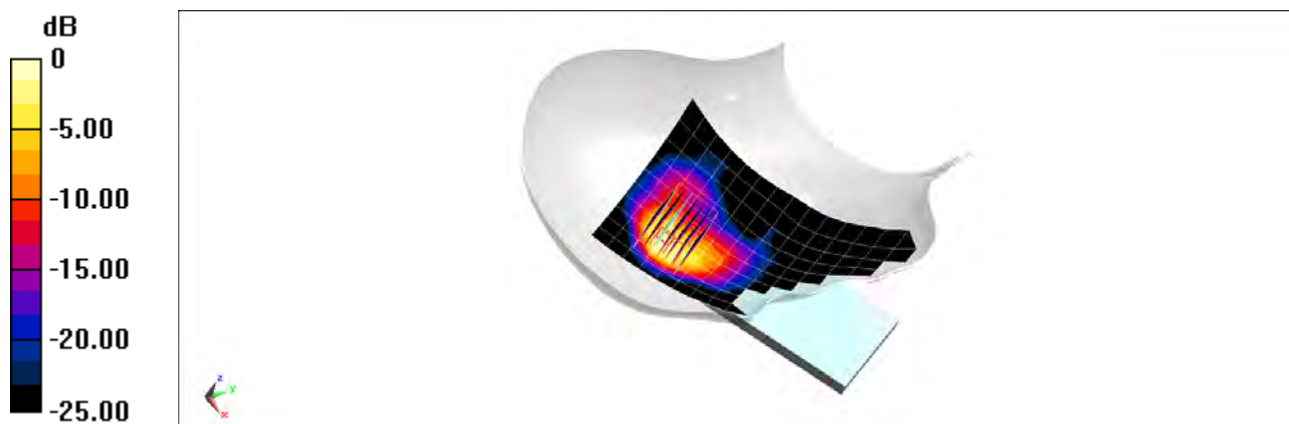

0 dB = 0.973 W/kg = -0.12 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12664

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Head; Medium parameters used:

$f = 2680$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 05/31/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2680 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 41, ULCA, PC3, Right Head, Cheek, High.ch,

PCC: Ch. 41490, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch. 41292, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.122 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.097 W/kg

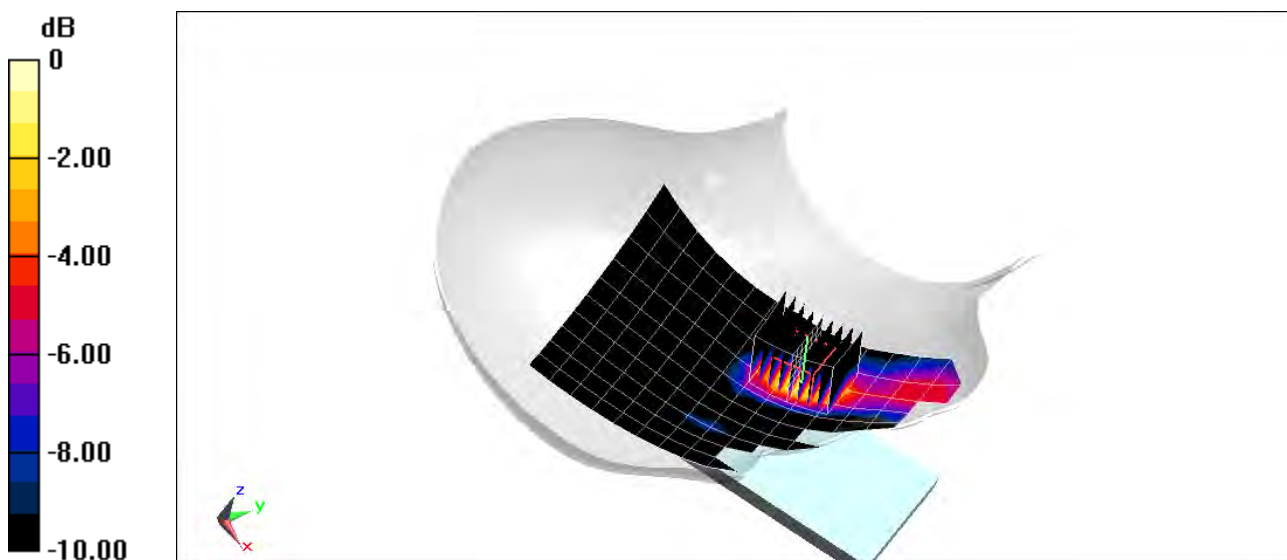

0 dB = 0.147 W/kg = -8.33 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12698

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.849 \text{ S/m}$; $\epsilon_r = 41.467$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/08/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n71, Right Head, Cheek,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 136100, 1 RB, 53 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.90 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.144 W/kg

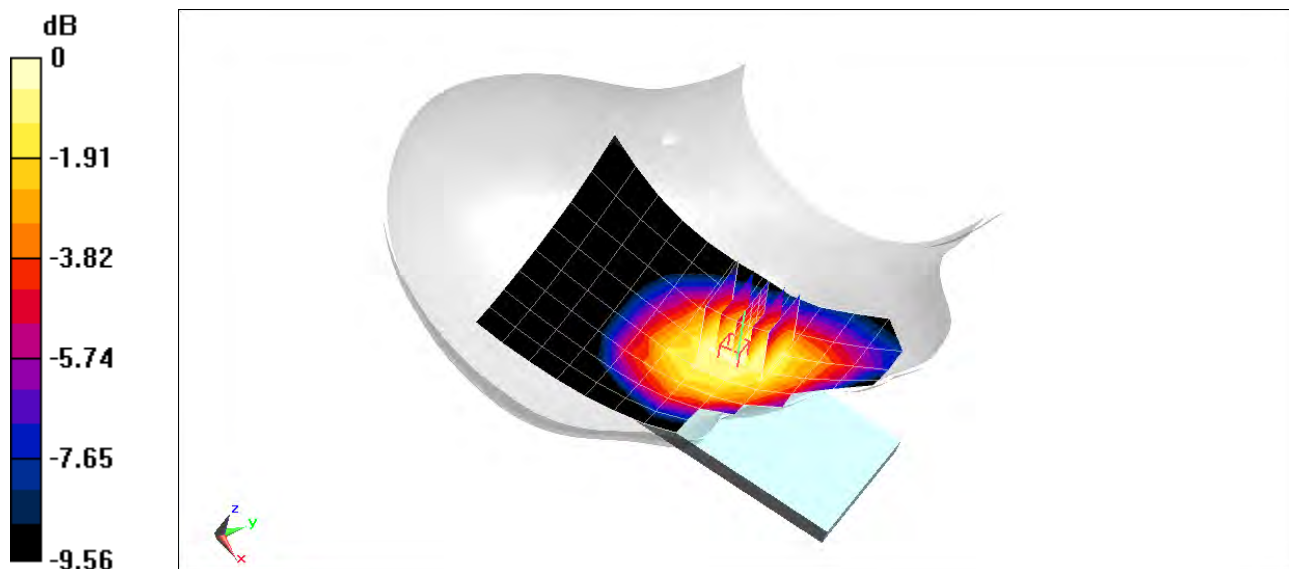

0 dB = 0.164 W/kg = -7.85 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12698

Communication System: UID 0, NR Band n5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.115$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/01/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 836.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n5, Right Head, Cheek,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 167300, 50 RB, 28 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.23 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.215 W/kg

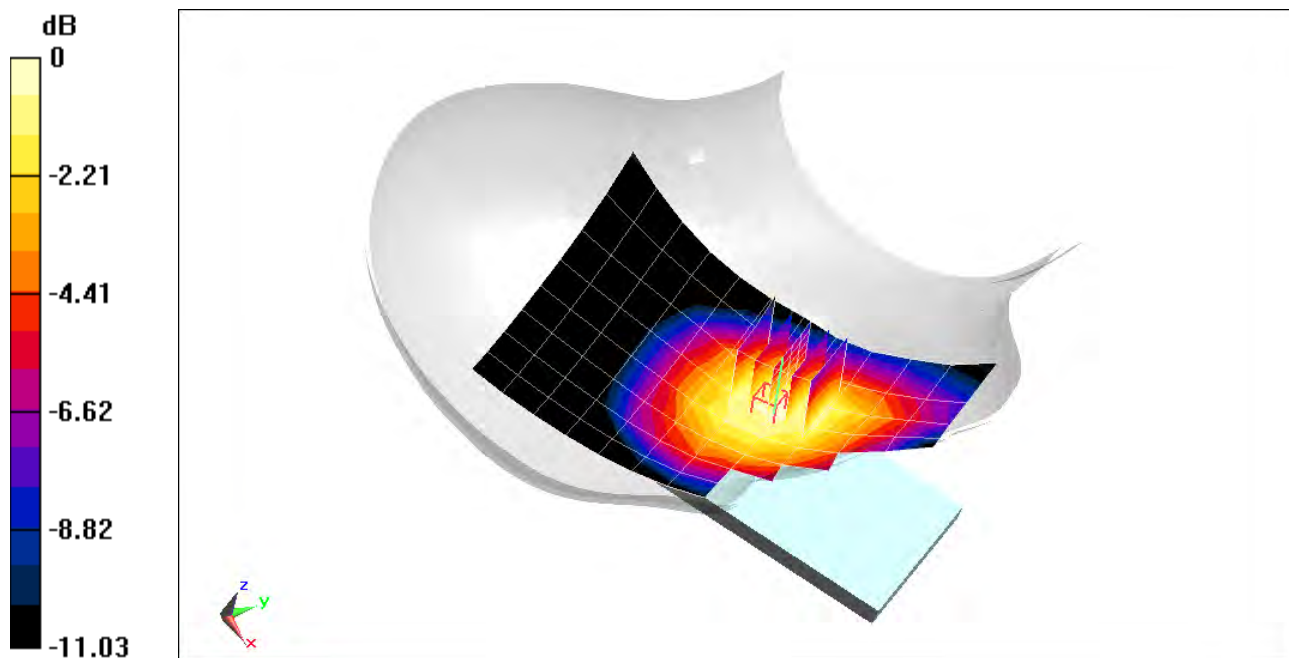

0 dB = 0.254 W/kg = -5.95 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17291

Communication System: UID 0, NR Band n66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.362 \text{ S/m}$; $\epsilon_r = 39.495$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7551; ConvF(8.34, 8.34, 8.34) @ 1745 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Right Head, Cheek,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 349000, 1 RB, 1 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.428 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.121 W/kg

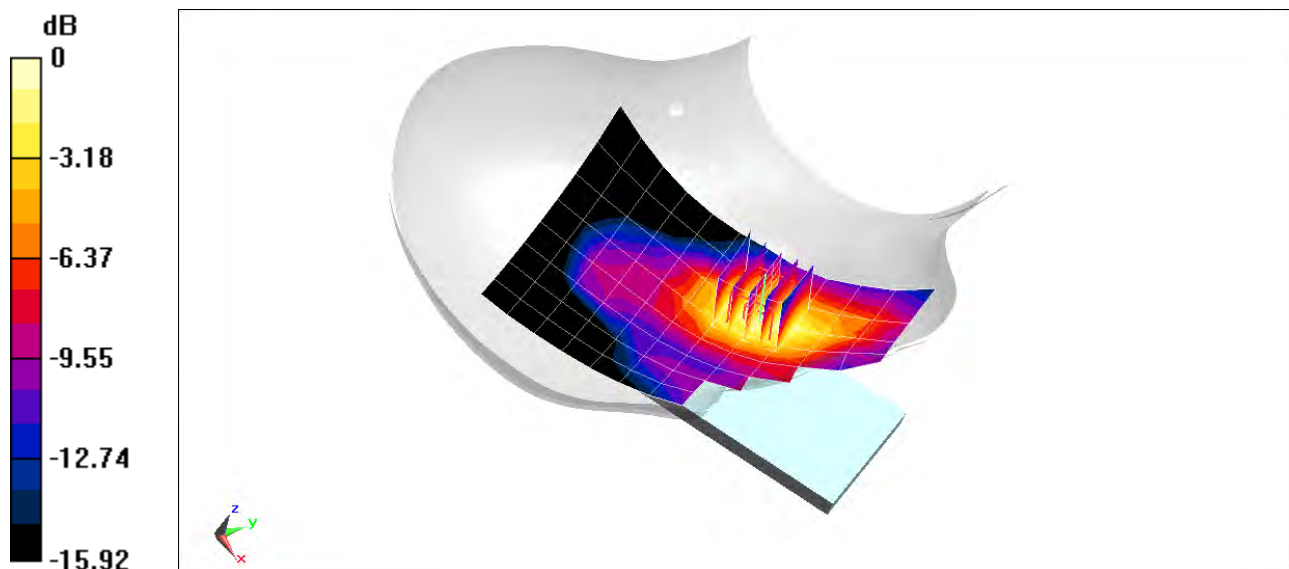

0 dB = 0.159 W/kg = -7.99 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12706

Communication System: UID 0, NR Band n25, Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1860$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.123$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/01/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1860 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n25, Right Head, Cheek,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 372000, 50 RB, 28 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.785 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.074 W/kg

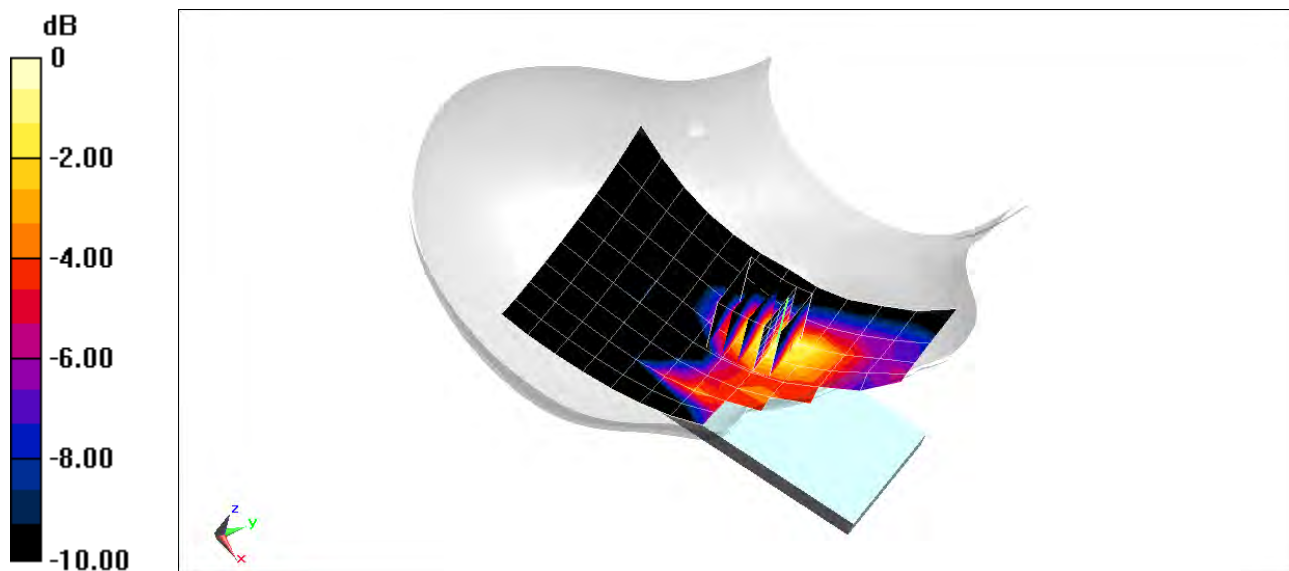

0 dB = 0.0980 W/kg = -10.09 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17705

Communication System: UID 0, NR Band n41; Frequency: 2592.99 MHz; Duty Cycle: 1:4

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2592.99$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 39.979$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/10/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2592.99 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n41, Right Head, Cheek,
100 MHz Bandwidth, CP-OFDM QPSK, Ch. 518598, 1 RB, 1 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.27 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.901 W/kg

SAR(1 g) = 0.397 W/kg

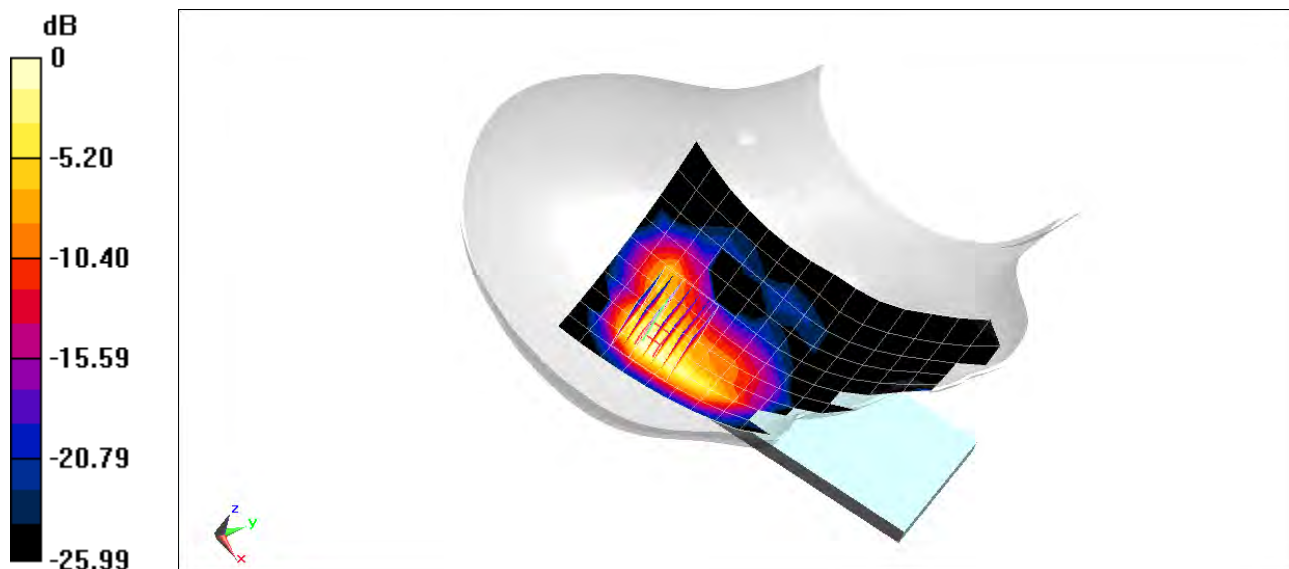

0 dB = 0.685 W/kg = -1.64 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 41929

Communication System: UID 0, 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.801 \text{ S/m}$; $\epsilon_r = 40.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06/19/2020; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7410; ConvF(7.47, 7.47, 7.47) @ 2462 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Left Head, Cheek, Ch 11, 1 Mbps


Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.638 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.688 W/kg

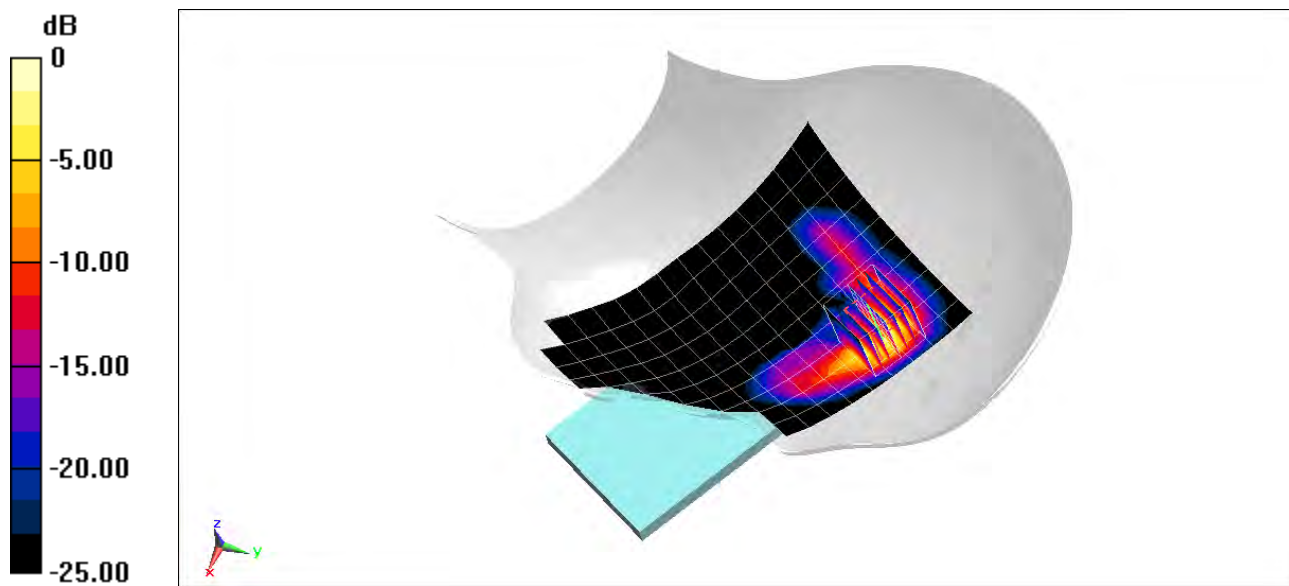

0 dB = 1.29 W/kg = 1.11 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 41929

Communication System: UID 0, IEEE 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head; Medium parameters used:

$f = 5290 \text{ MHz}$; $\sigma = 4.53 \text{ S/m}$; $\epsilon_r = 36.209$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06/29/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7357; ConvF(5.5, 5.5, 5.5) @ 5290 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11ac, U-NII-2A, MIMO, 80 MHz Bandwidth, Left Head, Cheek, Ch 58, 58.5 Mbps



Area Scan (13x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 3.790 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.398 W/kg

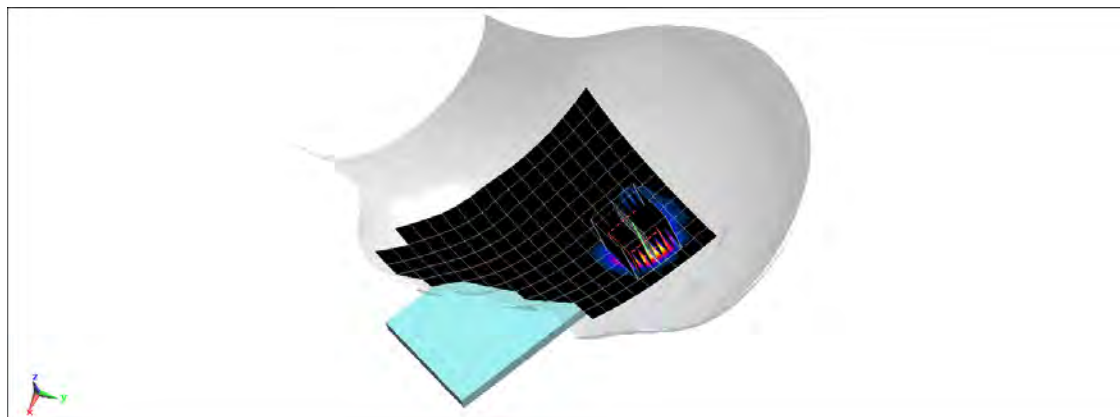

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 41929

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.814 \text{ S/m}$; $\epsilon_r = 41.119$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06/28/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2441 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Antenna 1, Left Head, Cheek, Ch 39, 1 Mbps


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.20 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.306 W/kg

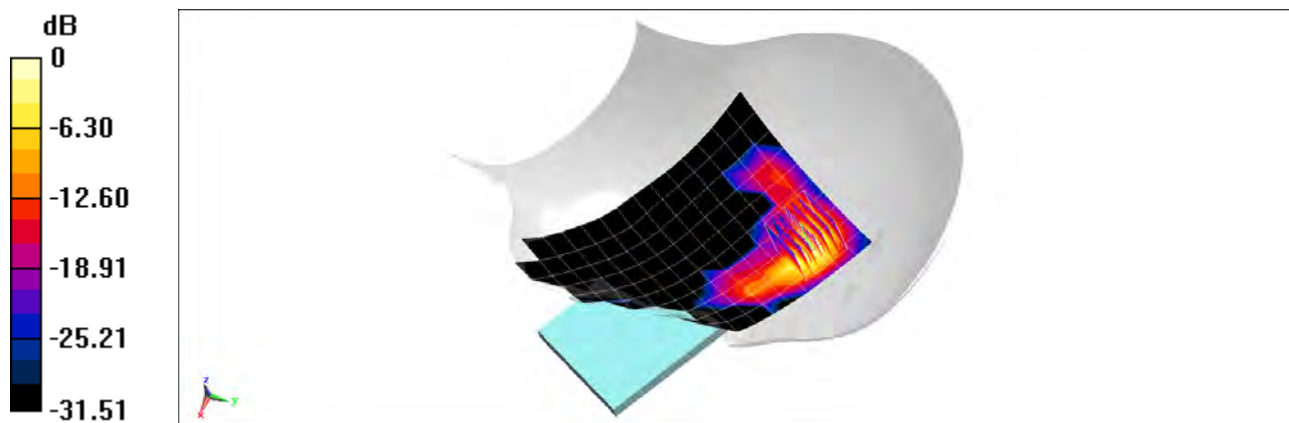

0 dB = 0.599 W/kg = -2.23 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 53.566$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/14/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 836.6 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 850, Body SAR, Back side, Mid.ch, Closed Configuration

Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.13 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

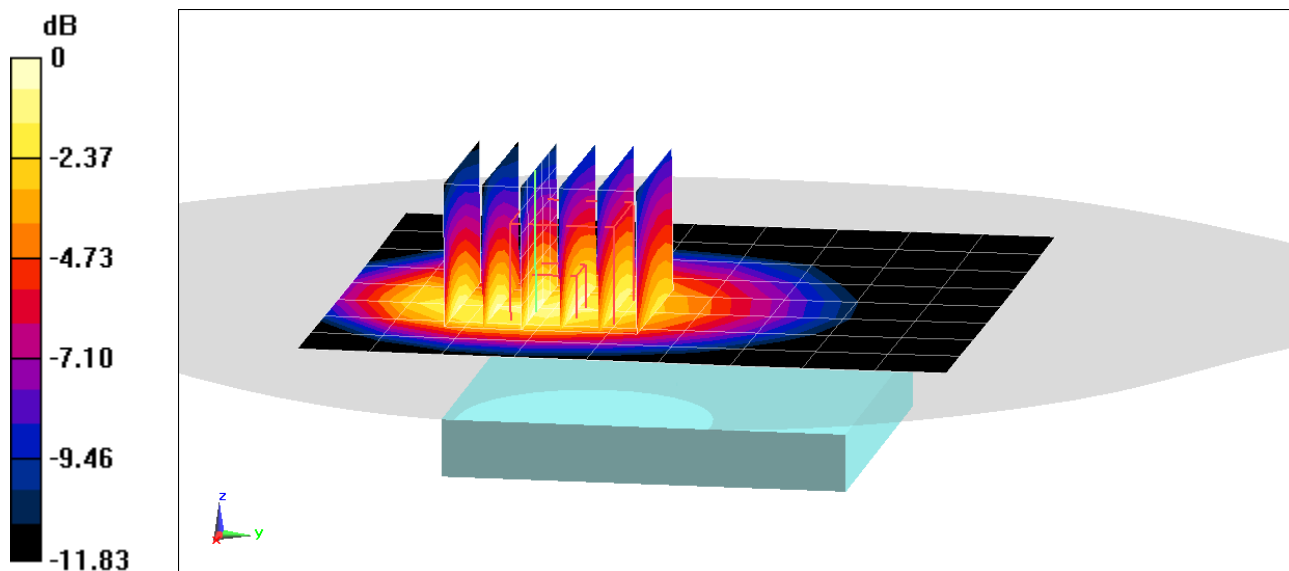

0 dB = 0.330 W/kg = -4.81 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 848.8$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 53.435$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/14/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 848.8 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 850, Body SAR, Back side, High.ch, 3 Tx Slots, Closed Configuration

Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.75 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.583 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

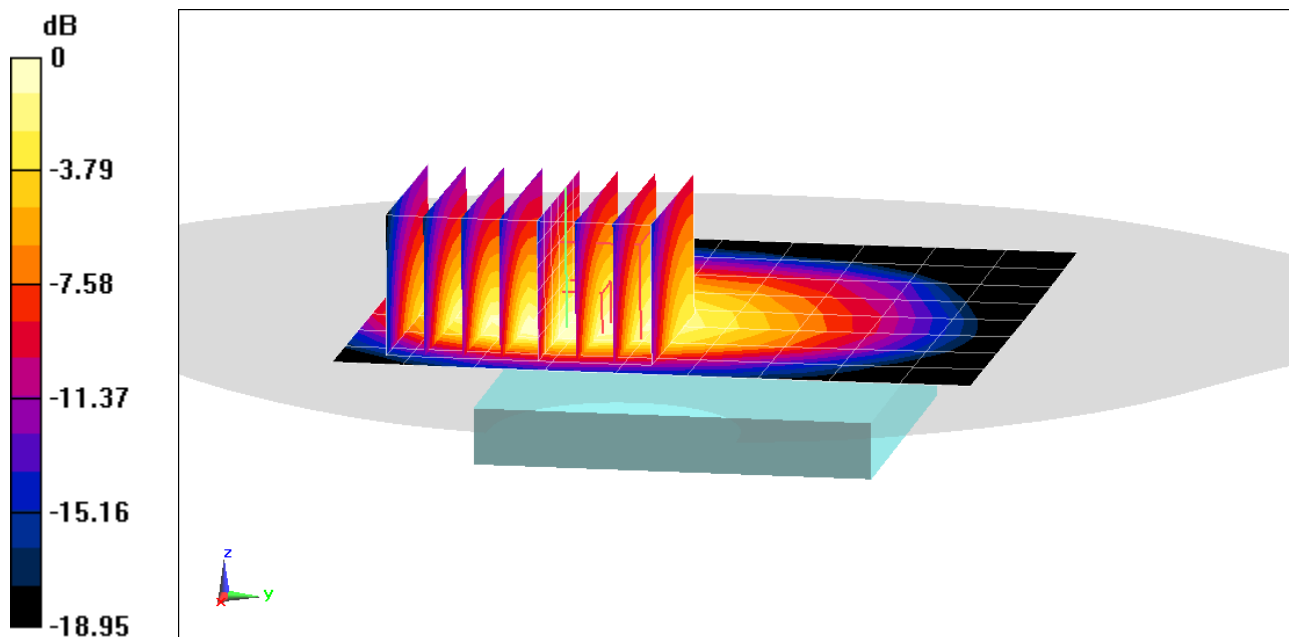

0 dB = 0.803 W/kg = -0.95 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.533 \text{ S/m}$; $\epsilon_r = 51.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/31/2020; Ambient Temp: 23.3°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 1900, Body SAR, Back side, Mid.ch, Open Configuration

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.24 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

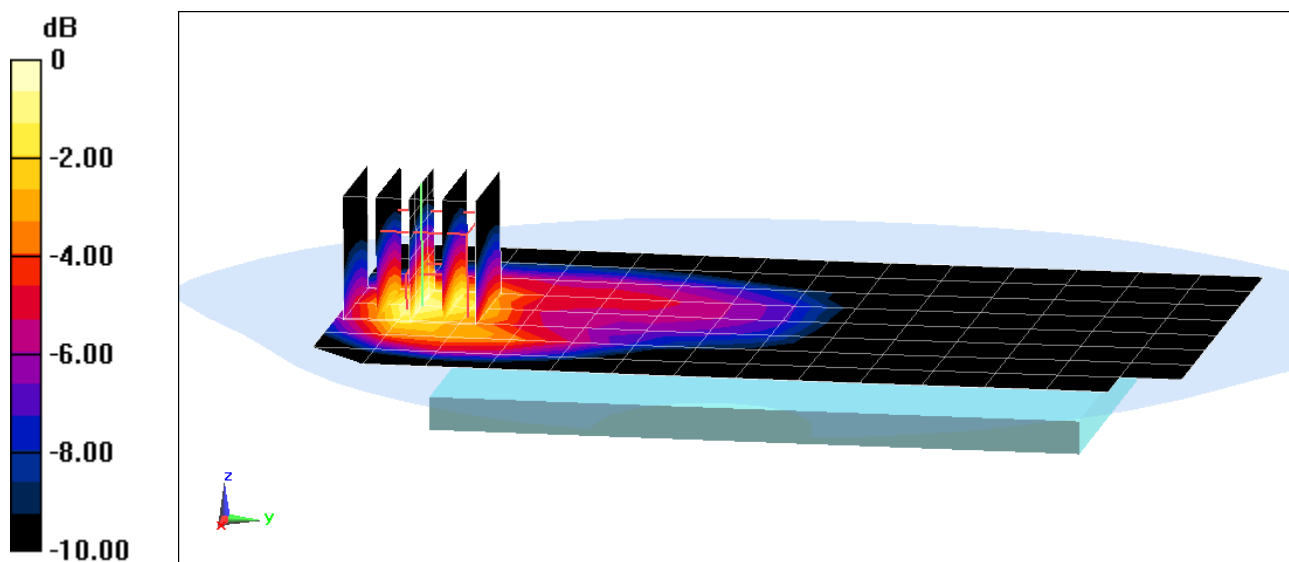

0 dB = 0.294 W/kg = -5.32 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.533 \text{ S/m}$; $\epsilon_r = 51.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/31/2020; Ambient Temp: 23.3°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots, Open Configuration

Area Scan (10x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 25.34 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.882 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

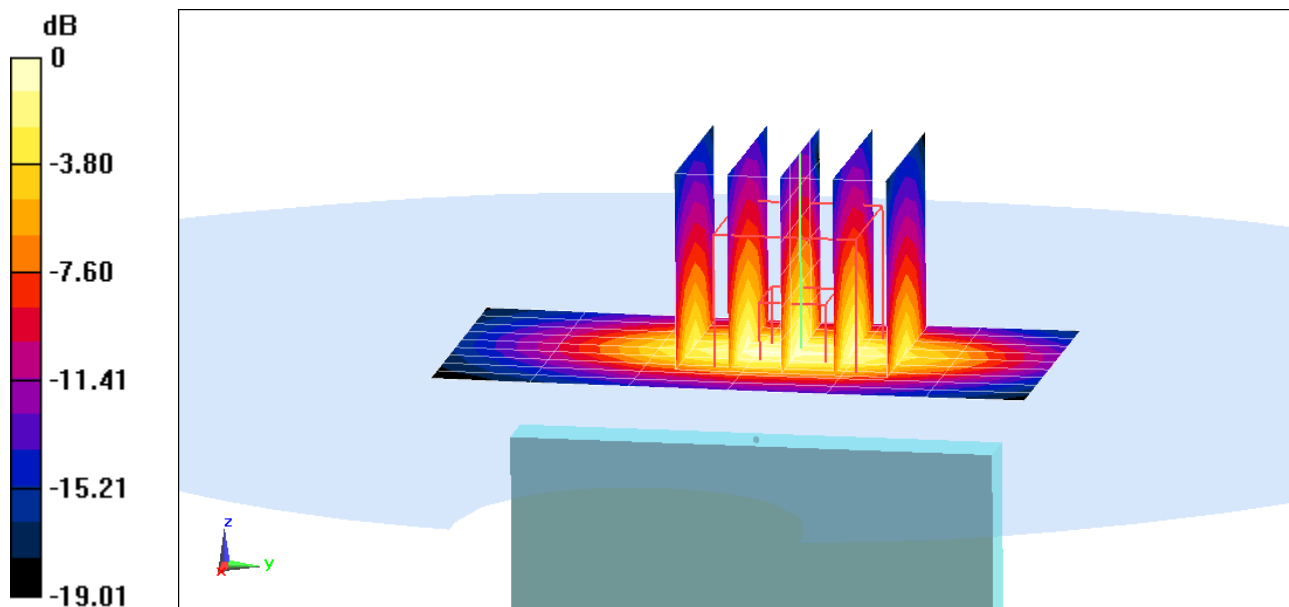

0 dB = 1.29 W/kg = 1.11 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 53.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/17/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Body SAR, Back side, Mid.ch, Closed Configuration

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.74 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.385 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

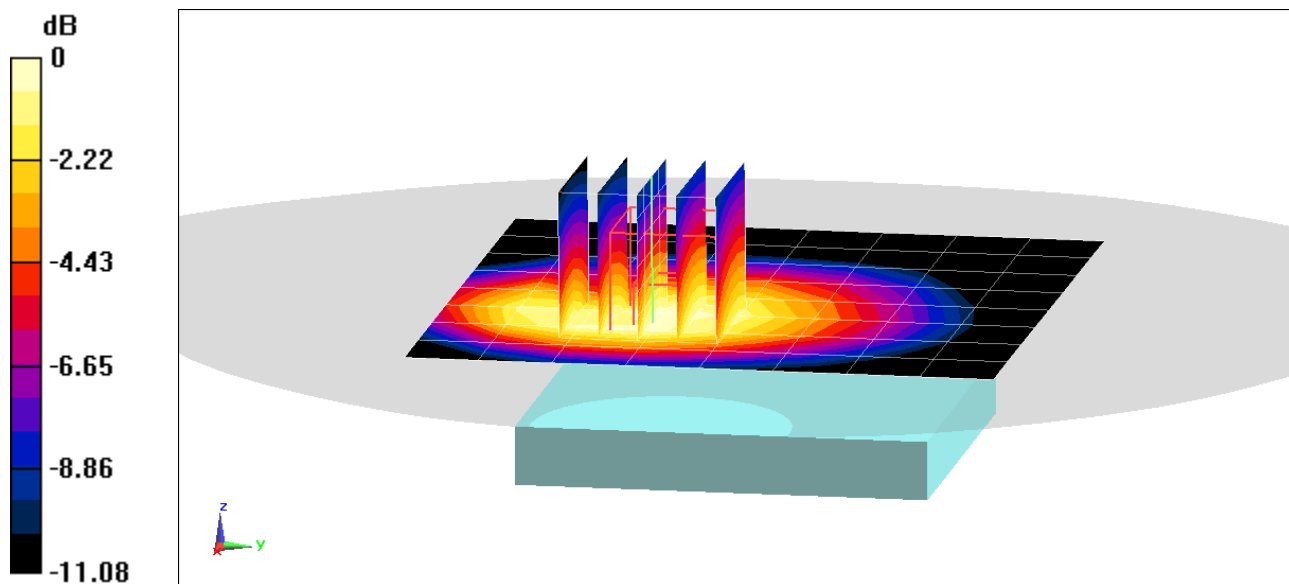

0 dB = 0.510 W/kg = -2.92 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 846.6 \text{ MHz}$; $\sigma = 0.962 \text{ S/m}$; $\epsilon_r = 52.956$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/17/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 846.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Body SAR, Back side, High.ch, Closed Configuration

Area Scan (9x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 25.85 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.634 W/kg

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

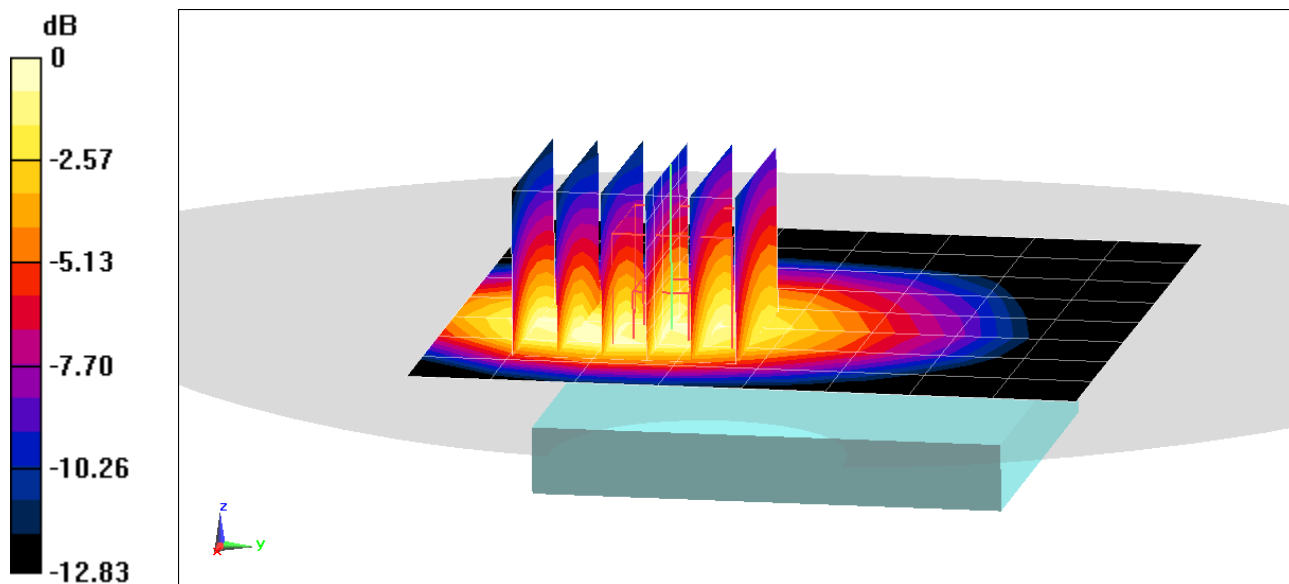

0 dB = 0.855 W/kg = -0.68 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17283

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1732.4 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch, Open Configuration

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.22 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.607 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

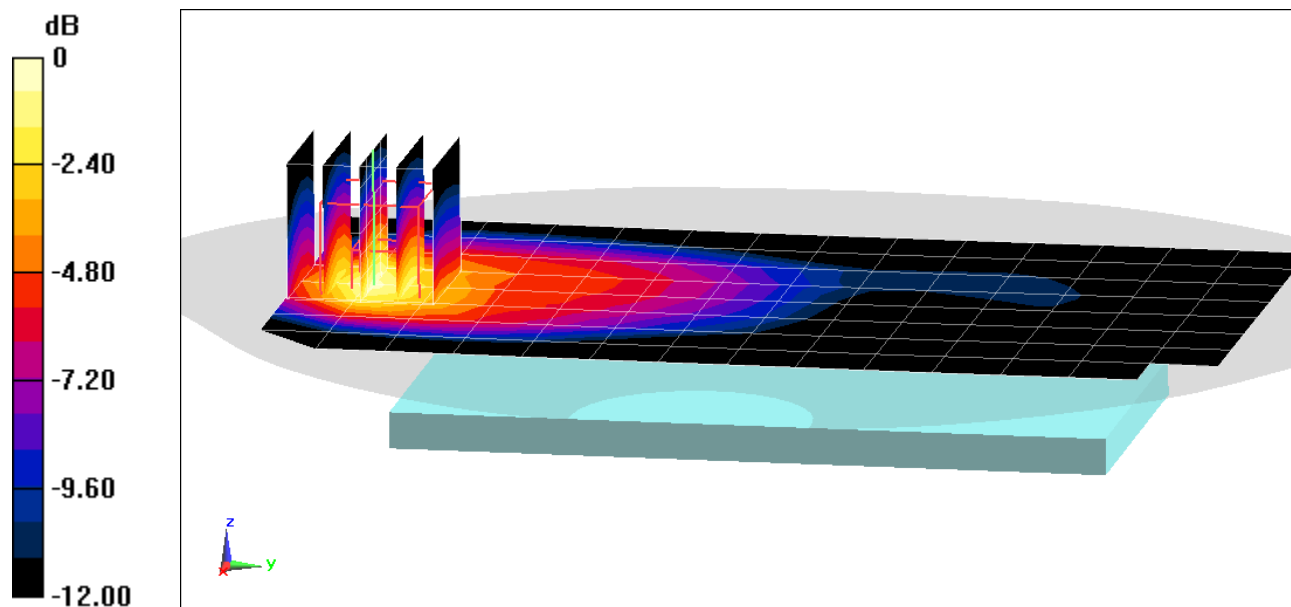

0 dB = 0.837 W/kg = -0.77 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17283

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1752.6$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1752.6 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Bottom Edge, High.ch, Open Configuration

Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.33 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.728 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

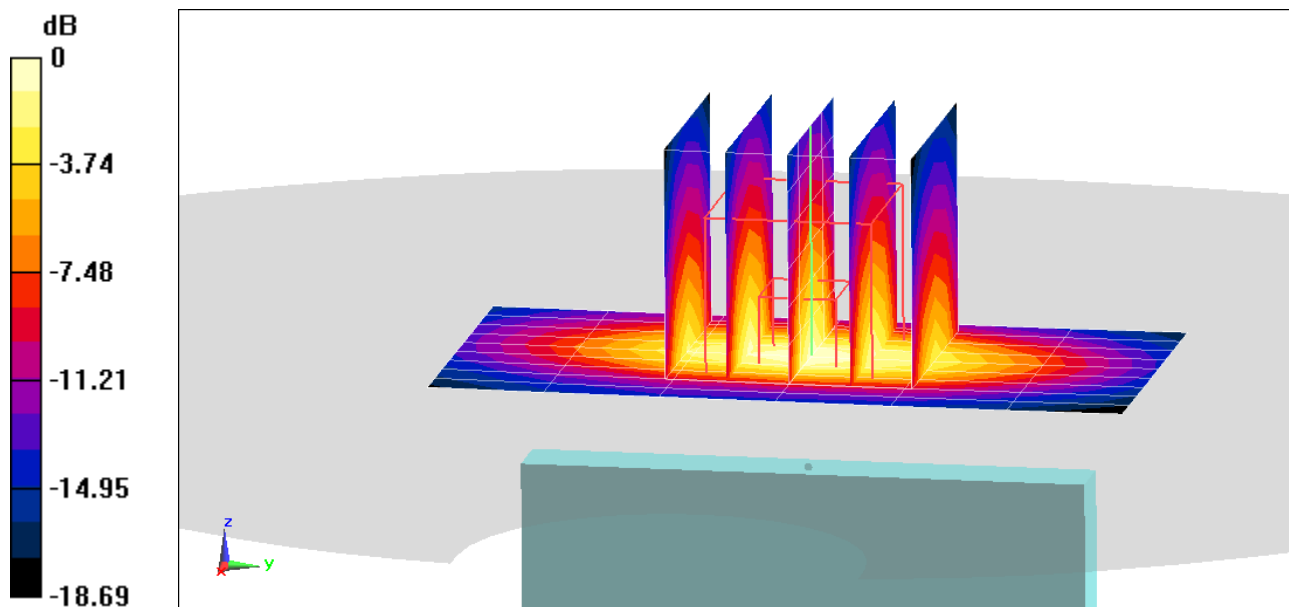

0 dB = 1.10 W/kg = 0.41 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$; $\sigma = 1.505 \text{ S/m}$; $\epsilon_r = 53.151$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/26/2020; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1852.4 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Back side, Low.ch, Open Configuration

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 22.69 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.694 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

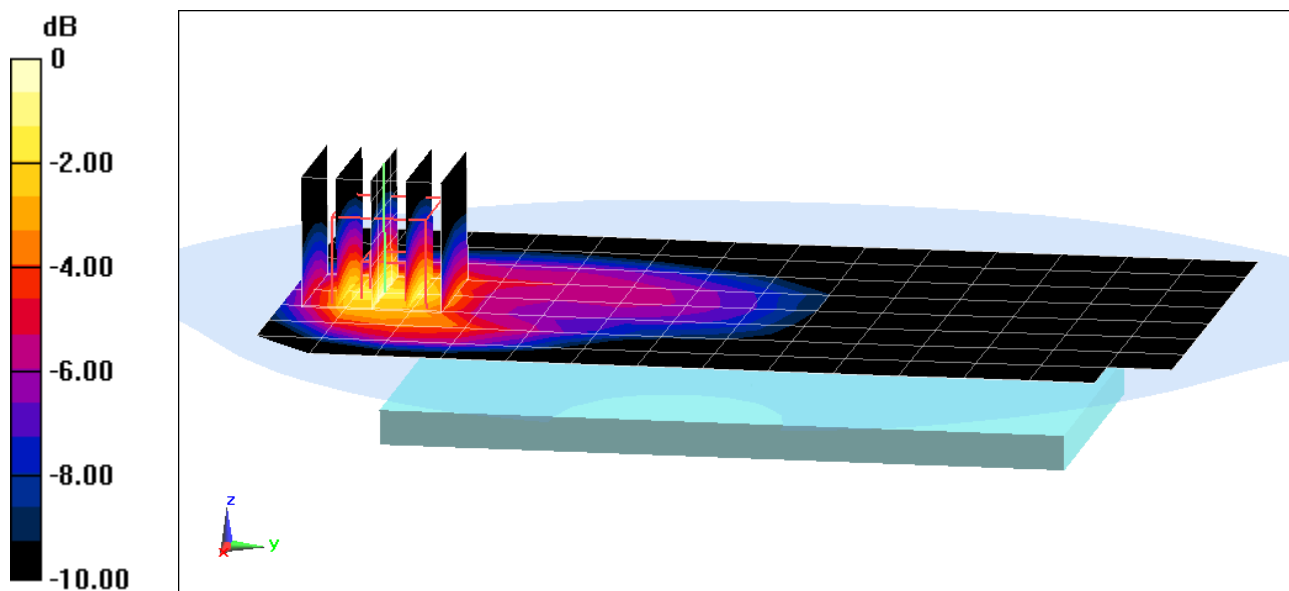

0 dB = 0.989 W/kg = -0.05 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1907.6$ MHz; $\sigma = 1.568$ S/m; $\epsilon_r = 52.998$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/26/2020; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1907.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Bottom Edge, High.ch, Open Configuration

Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.74 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.991 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

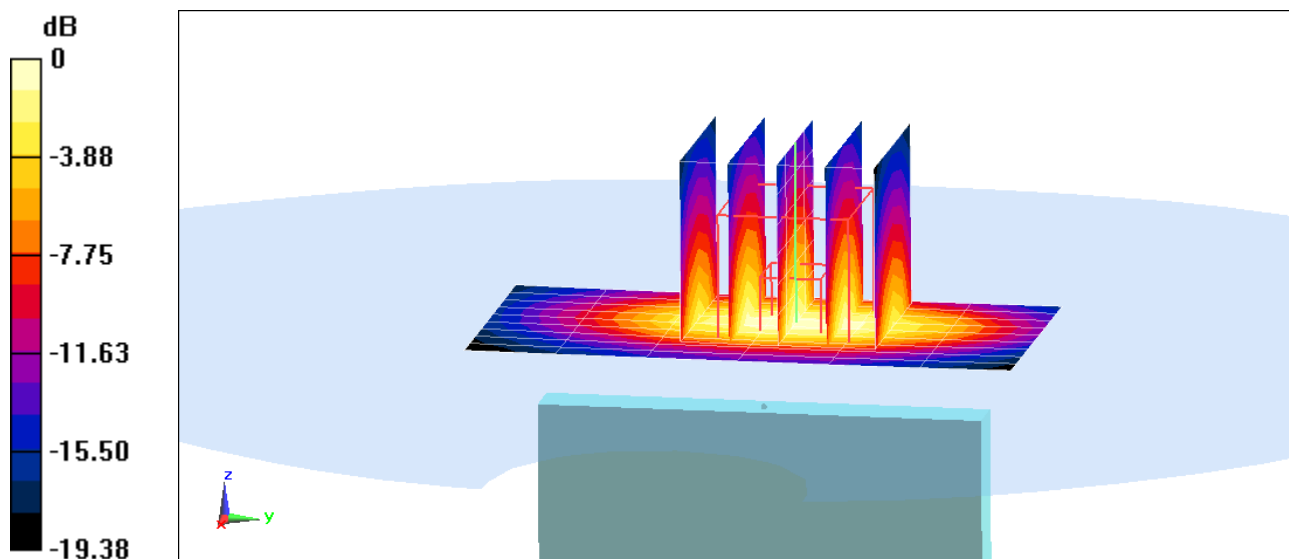

0 dB = 1.54 W/kg = 1.88 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 54.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 820.1 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. CDMA, Rule Part 90S, Body SAR, Back side, Mid.ch,
Closed Configuration**

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.72 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

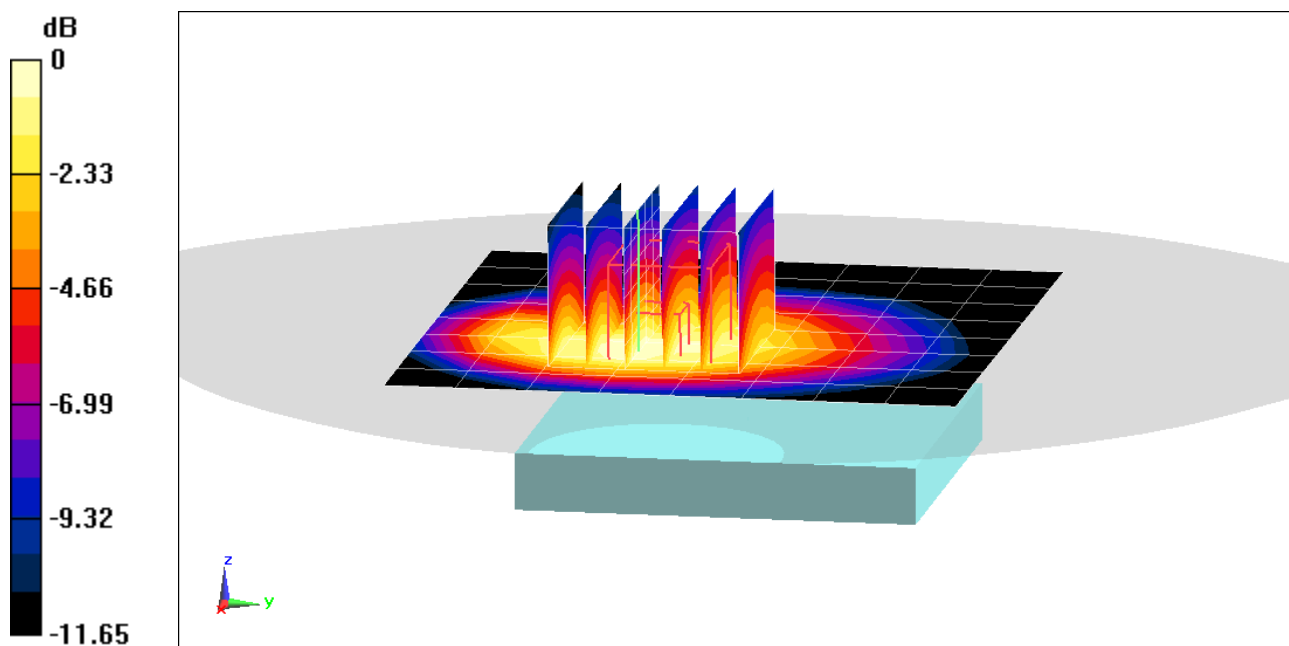

0 dB = 0.564 W/kg = -2.49 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 54.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 820.1 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. EVDO Rev. 0, Rule Part 90S, Body SAR, Back side, Mid.ch,
Closed Configuration**

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.56 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.932 W/kg

SAR(1 g) = 0.615 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.7%

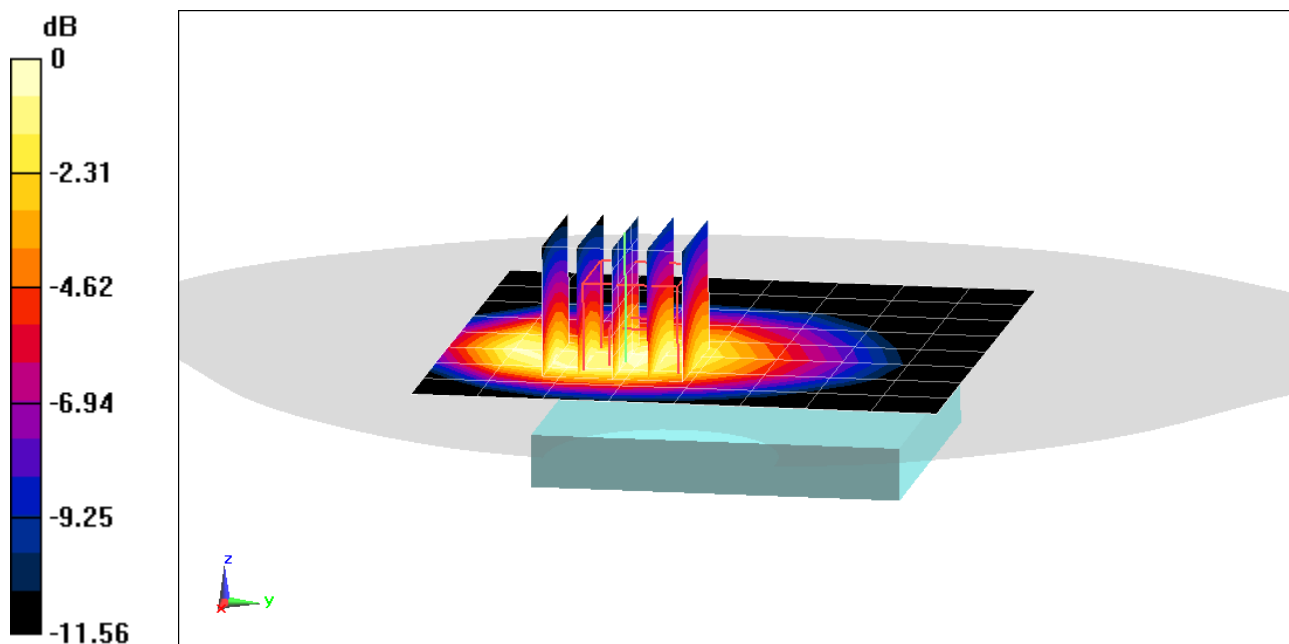

0 dB = 0.803 W/kg = -0.95 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.52 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. CDMA, Rule Part 22H, Body SAR, Back side, Mid.ch,
Closed Configuration**

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.38 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.639 W/kg

SAR(1 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

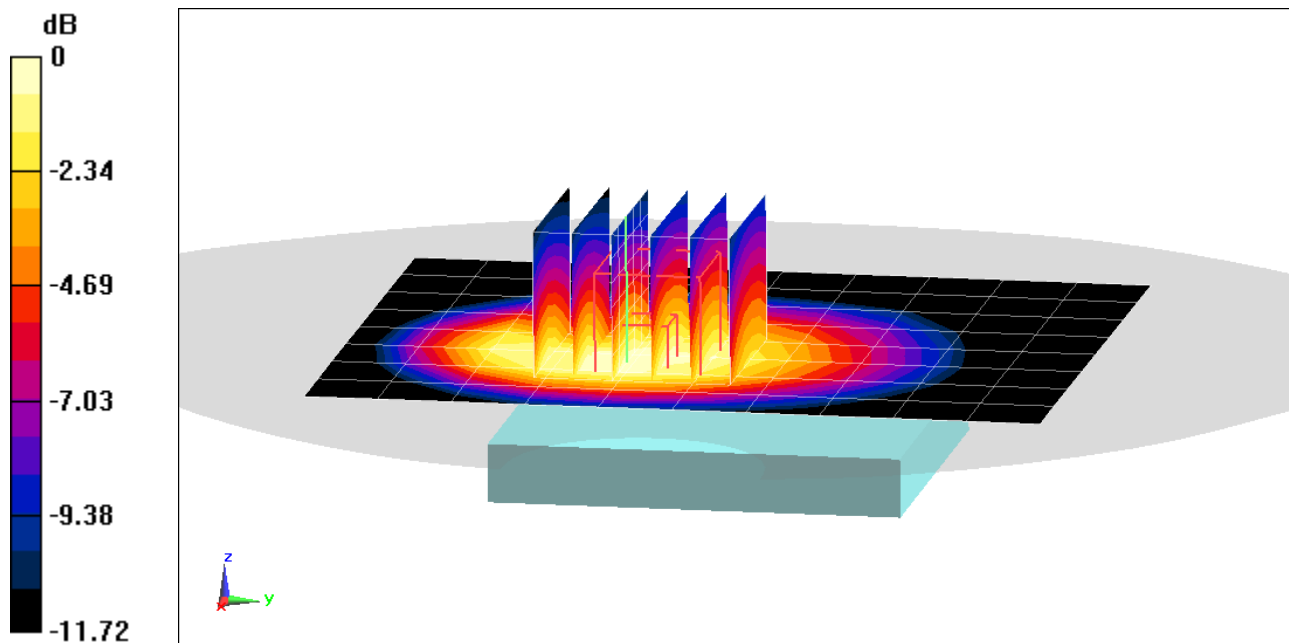

0 dB = 0.555 W/kg = -2.56 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12532

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.52 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. EVDO Rev. 0, Rule Part 22H, Body SAR, Back side, Mid.ch,
Closed Configuration**

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.11 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.708 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

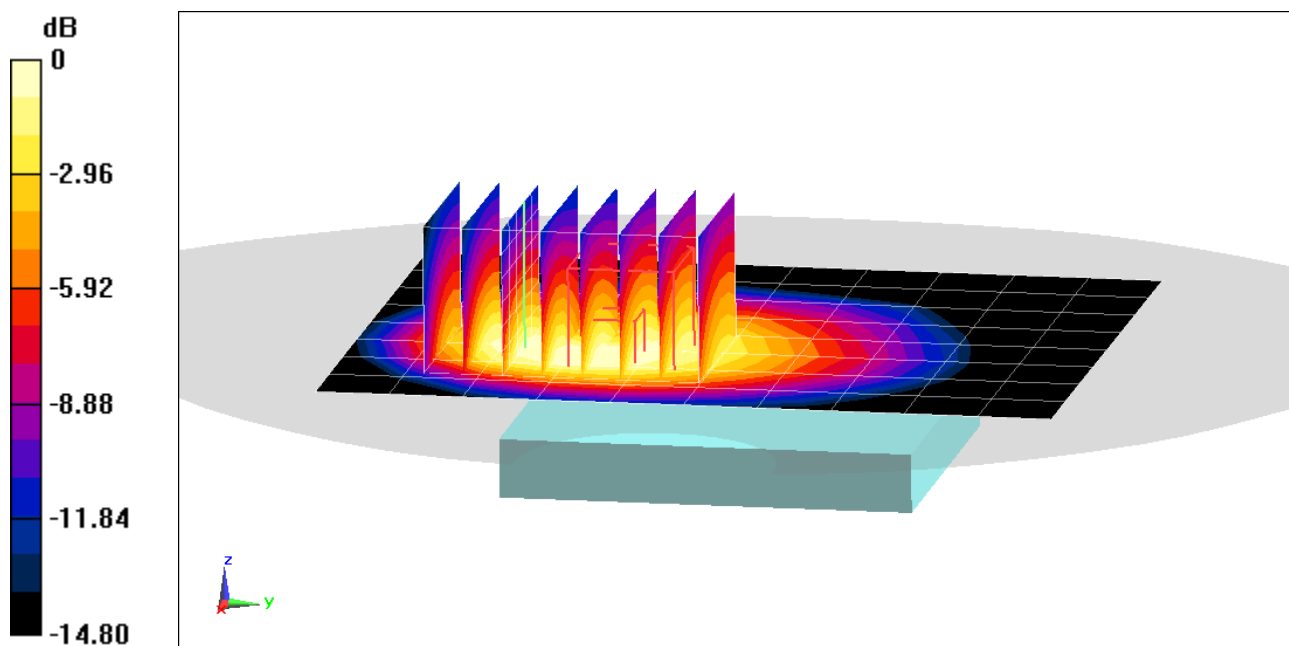

0 dB = 0.972 W/kg = -0.12 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.536 \text{ S/m}$; $\epsilon_r = 52.224$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/03/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch, Open Configuration

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

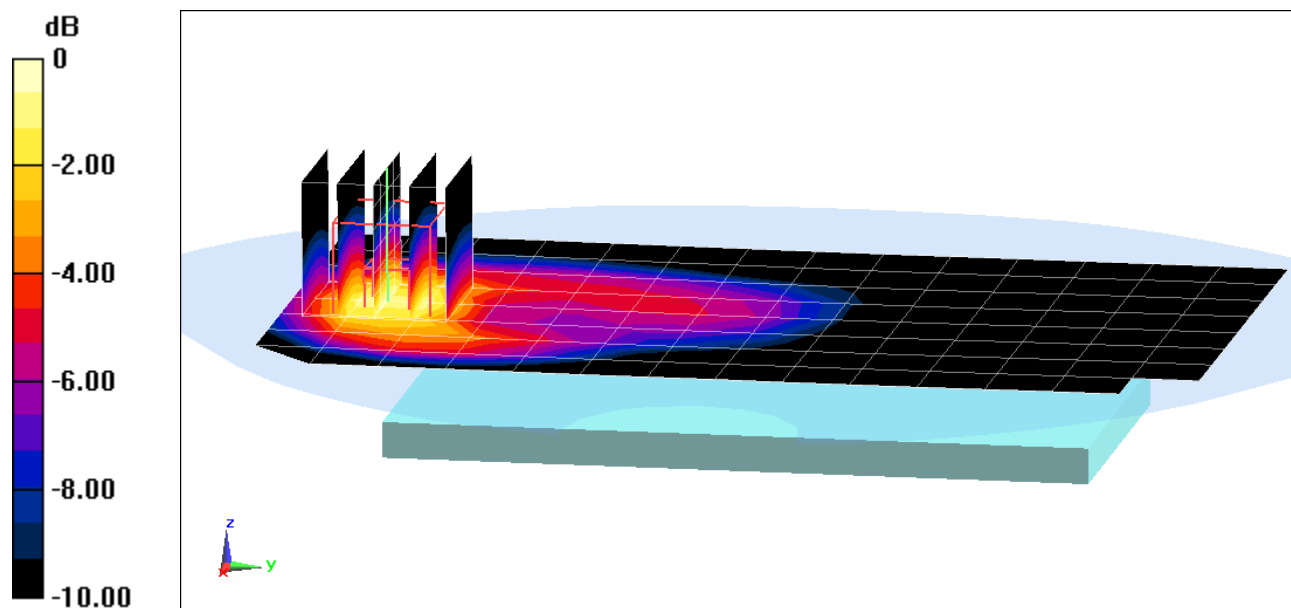

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used (interpolated):
 $f = 1908.75$ MHz; $\sigma = 1.569$ S/m; $\epsilon_r = 52.093$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/03/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1908.75 MHz; Calibrated: 12/11/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1533; Calibrated: 12/5/2019
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev. 0, Body SAR, Bottom Edge, High.ch, Open Configuration

Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.02 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.676 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

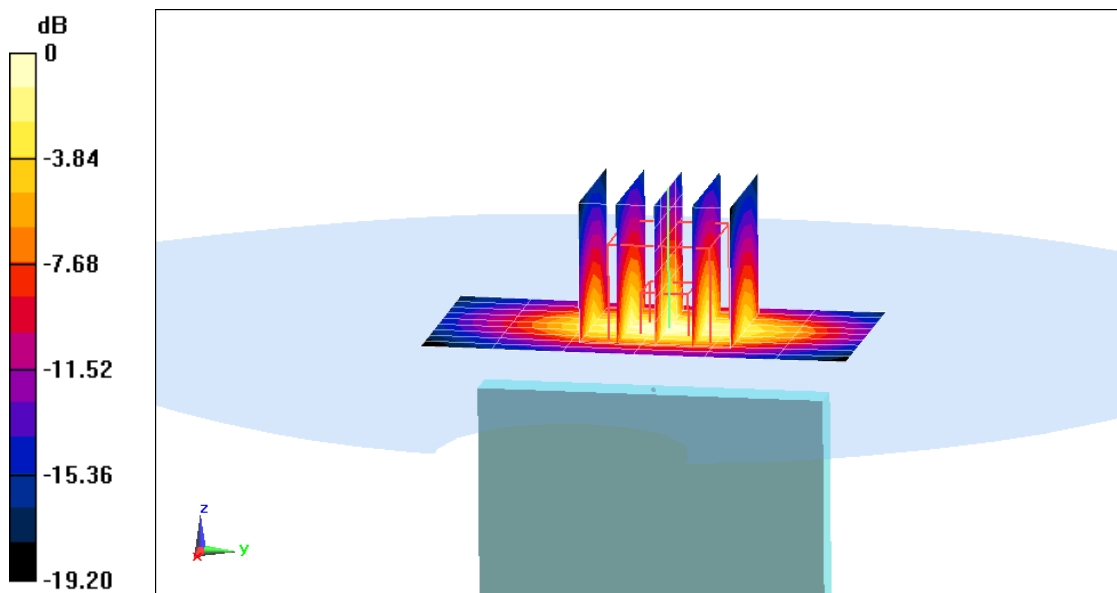

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 53.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/20/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch, Open Configuration,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75%

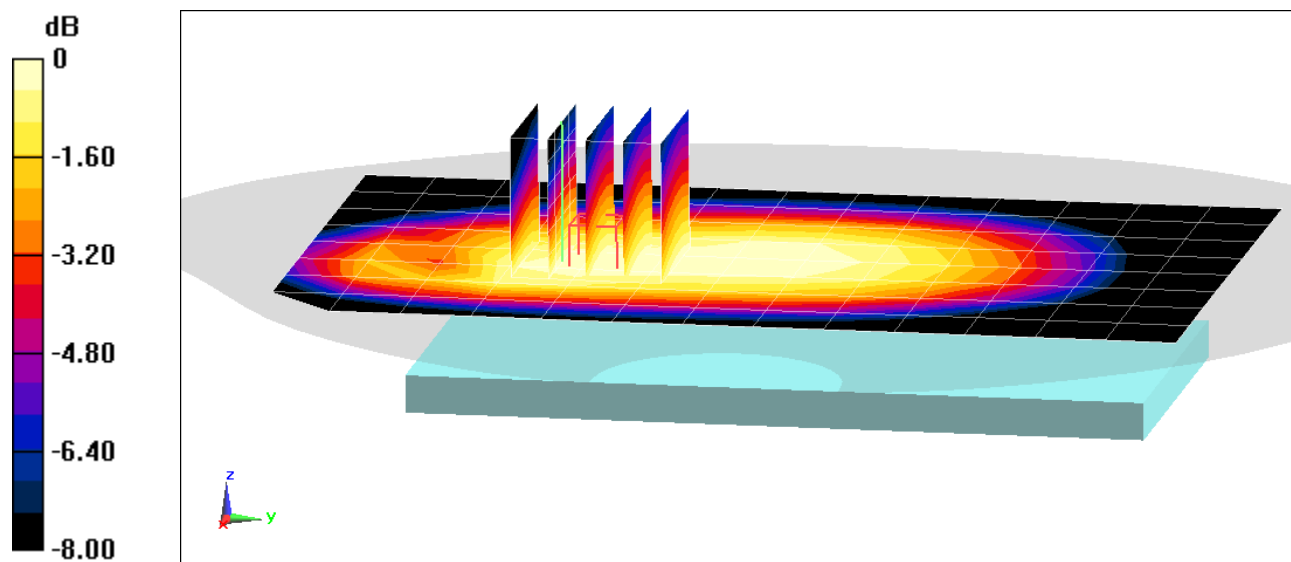

0 dB = 0.283 W/kg = -5.48 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 53.807$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/20/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch, Closed Configuration,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.08 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

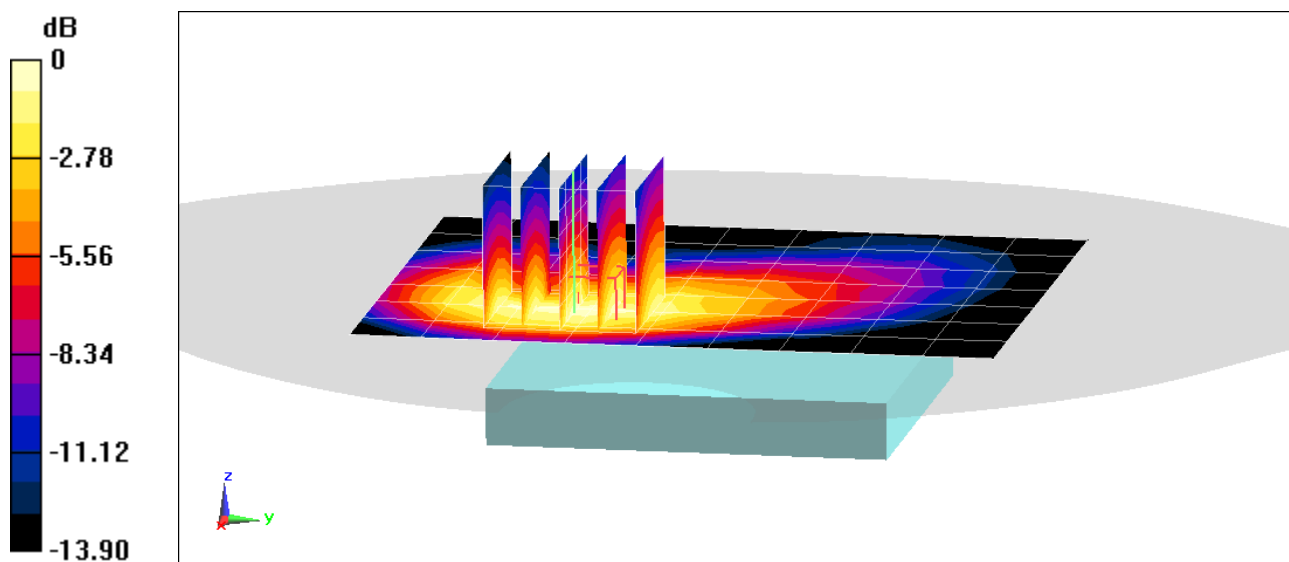

0 dB = 0.501 W/kg = -3.00 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 53.749$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/20/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch, Open Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.26 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.5%

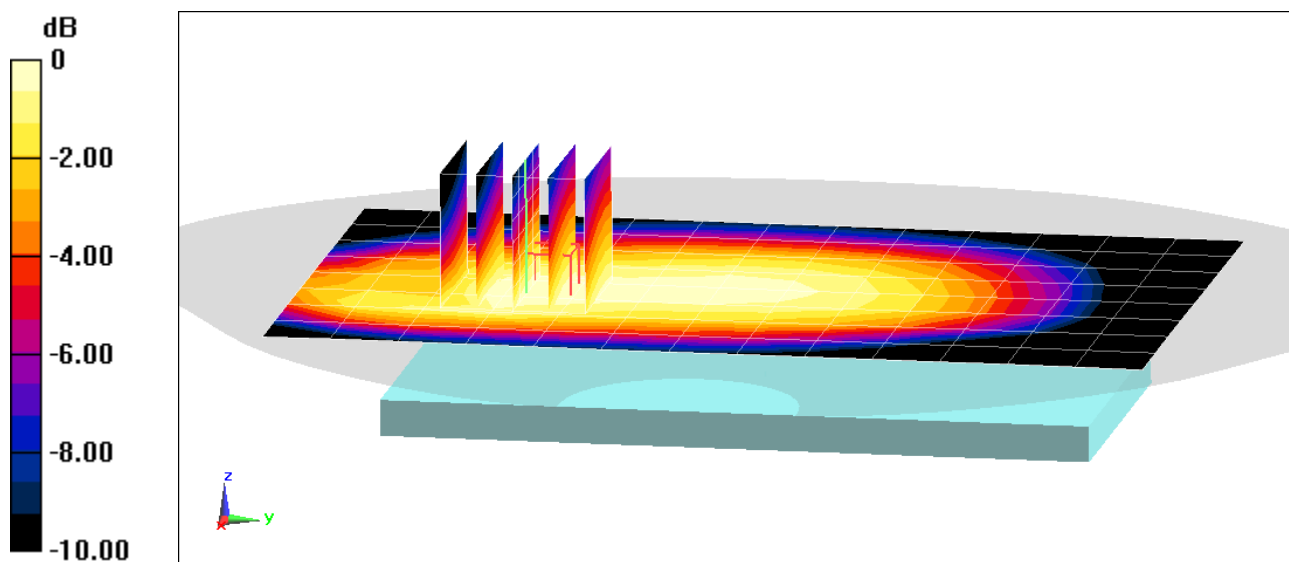

0 dB = 0.298 W/kg = -5.26 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 53.749$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/20/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch, Open Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.75 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 61.1%

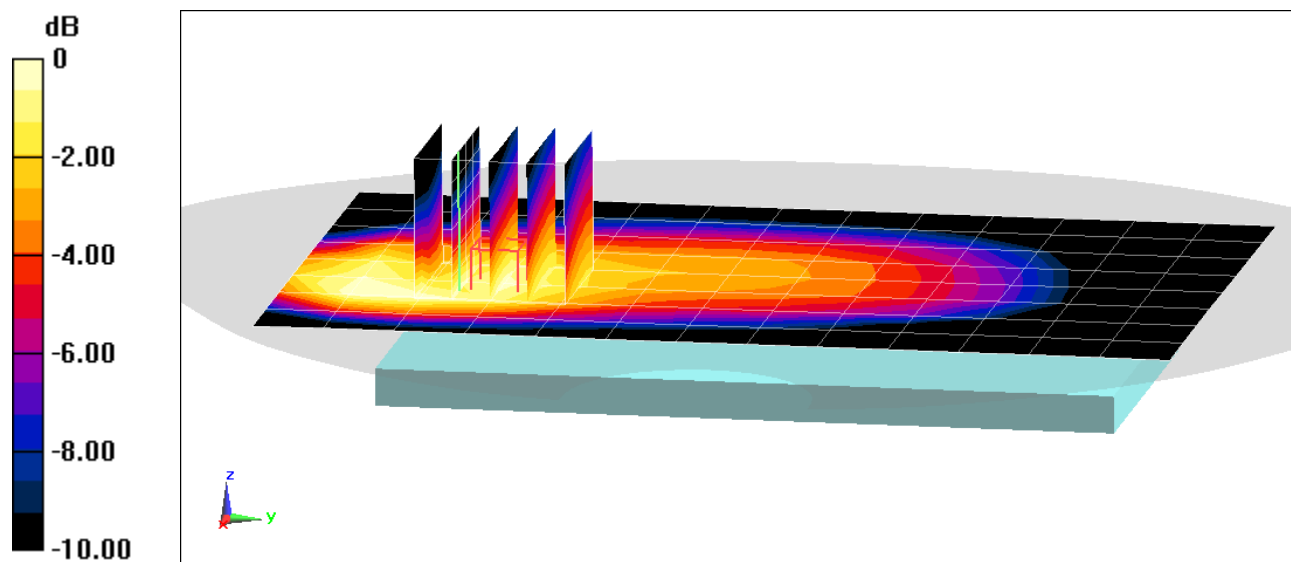

0 dB = 0.514 W/kg = -2.89 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.97 \text{ S/m}$; $\epsilon_r = 54.215$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, Closed Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.07 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.261 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

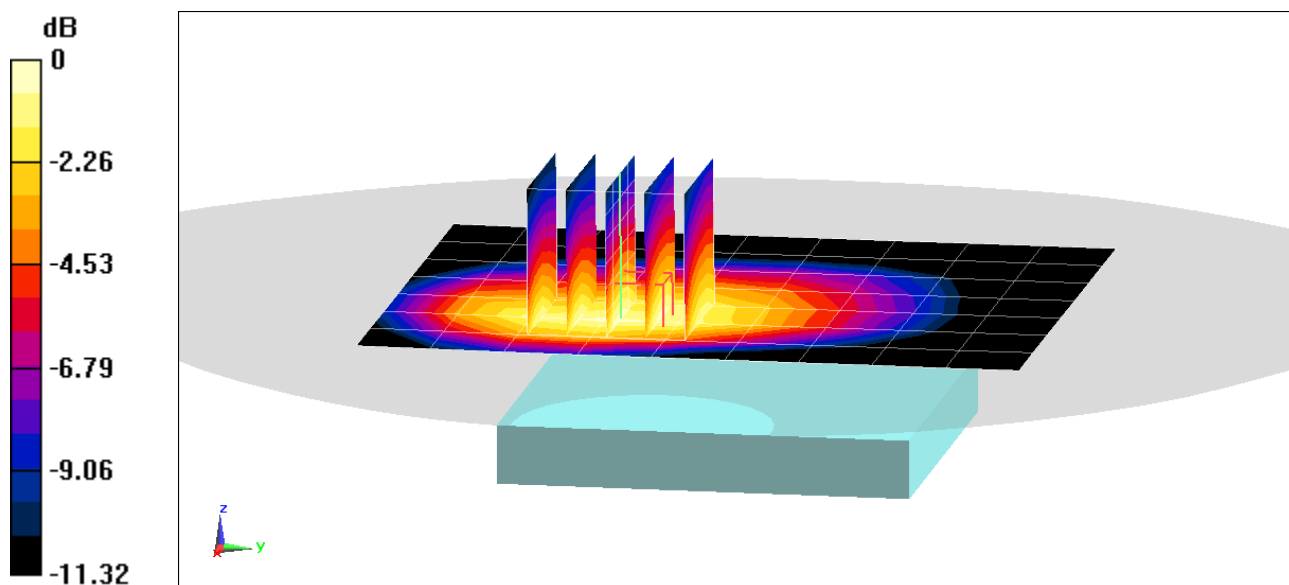

0 dB = 0.344 W/kg = -4.63 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.97 \text{ S/m}$; $\epsilon_r = 54.215$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, Open Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 21.29 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

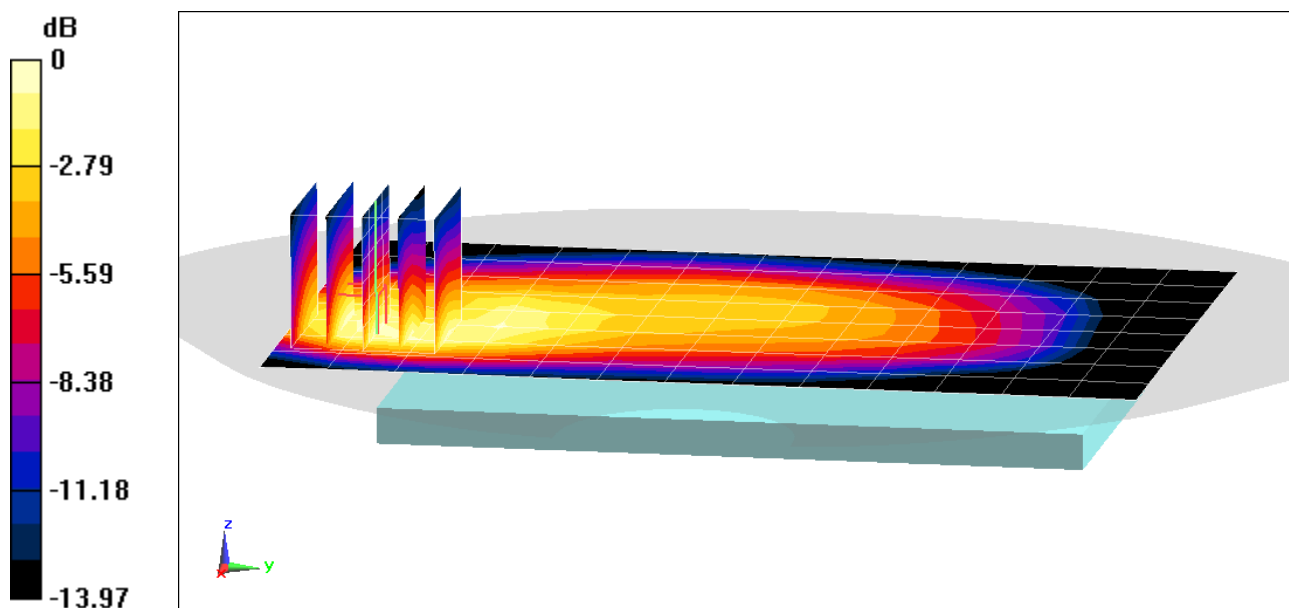

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 54.188$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 793 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 14, Body SAR, Back side, Mid.ch, Closed Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

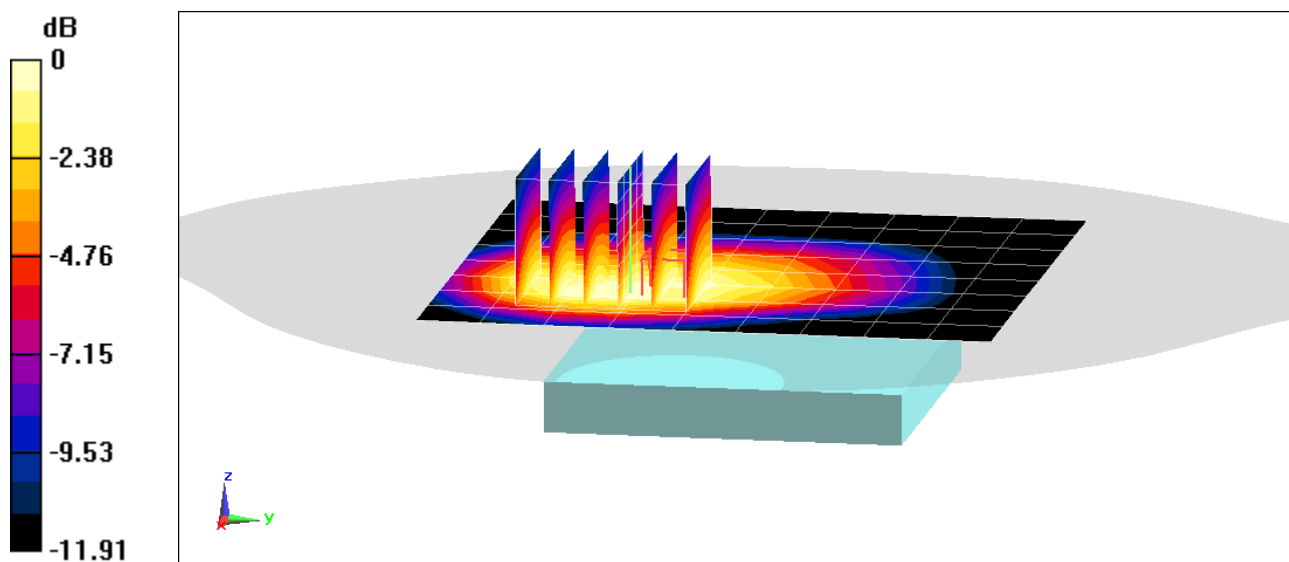

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12573

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 54.188$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 793 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 14, Body SAR, Back side, Mid.ch, Closed Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.90 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.406 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

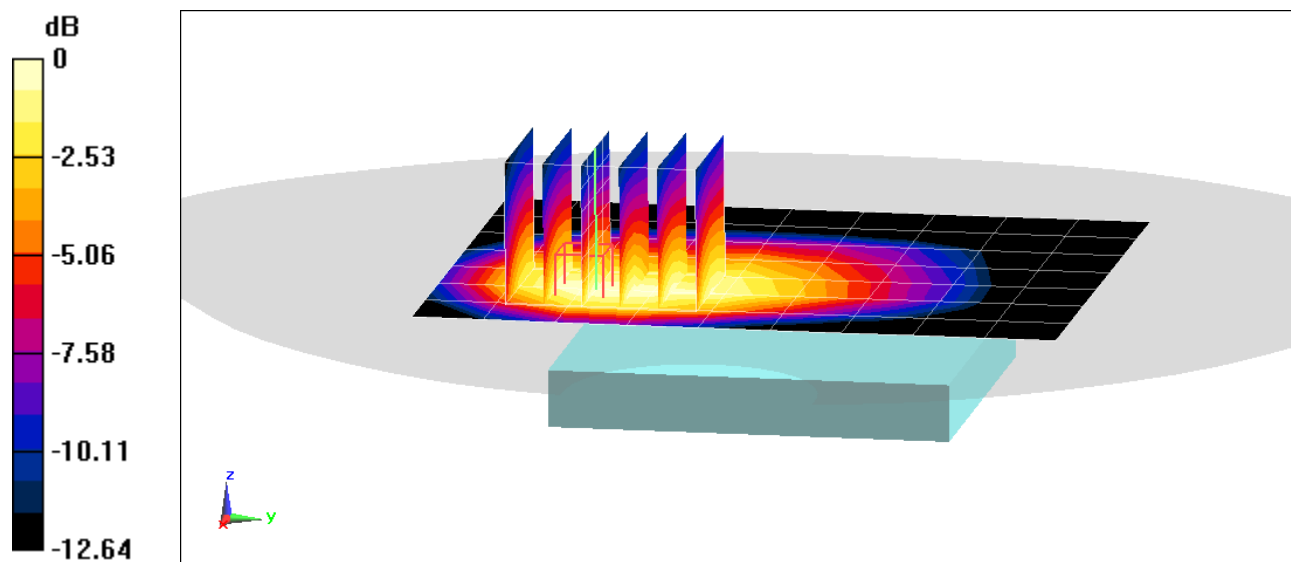

0 dB = 0.566 W/kg = -2.47 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12748

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 53.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/29/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 5 (Cell.), ULCA, Body SAR, Back side, Closed Configuration,

PCC: Ch. 20525, 10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset

SCC: Ch. 20597, 5 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.45 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

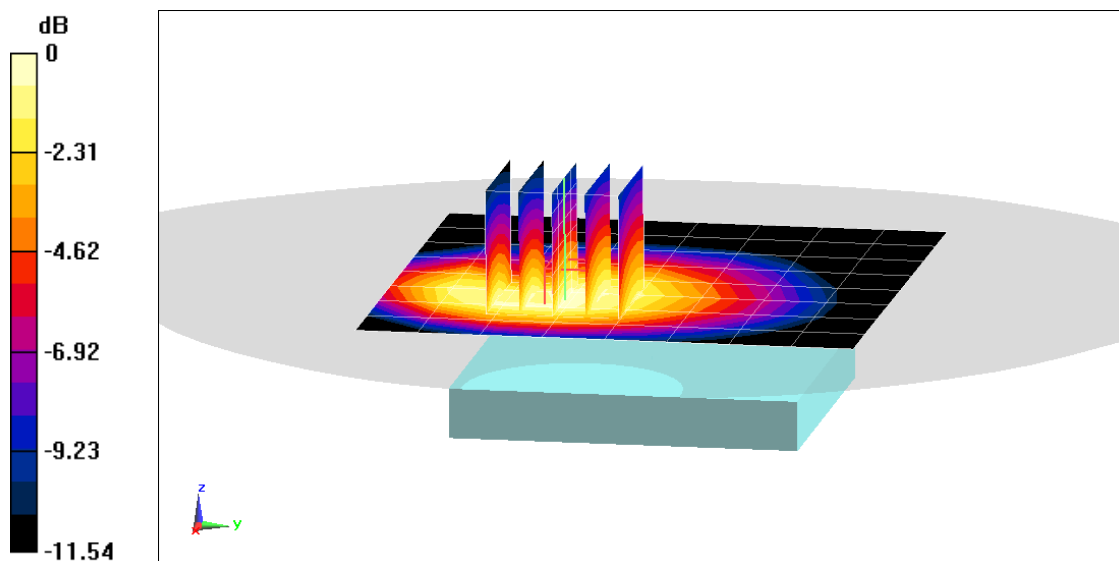

0 dB = 0.419 W/kg = -3.78 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12748

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch, Closed Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.95 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

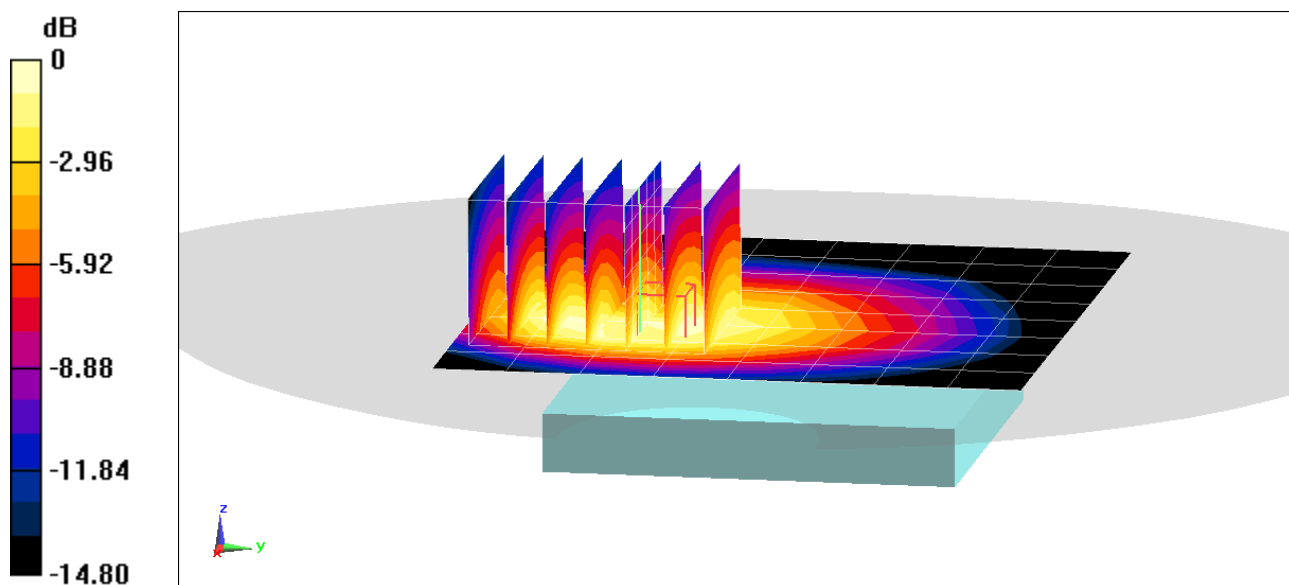

0 dB = 0.712 W/kg = -1.48 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12565

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.946$ S/m; $\epsilon_r = 53.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/17/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 831.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch, Closed Configuration,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.47 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.340 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

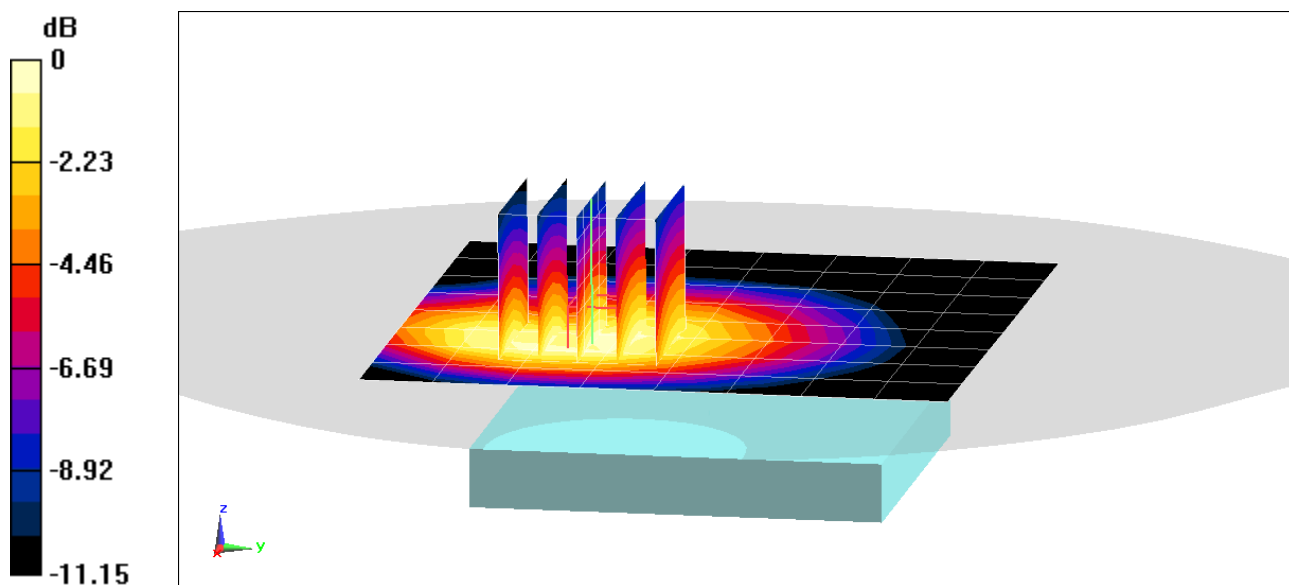

0 dB = 0.453 W/kg = -3.44 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12565

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.946$ S/m; $\epsilon_r = 53.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/17/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 831.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch, Closed Configuration,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.91 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.533 W/kg

Smallest distance from peaks to all points 3 dB below = 17.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

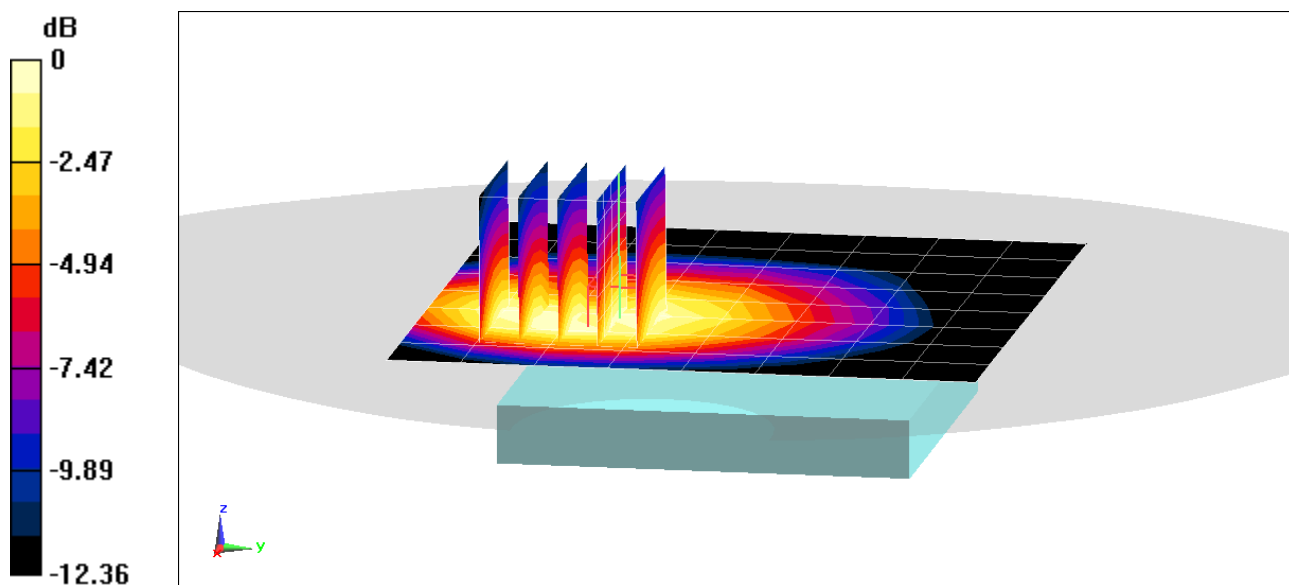

0 dB = 0.707 W/kg = -1.51 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17488

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.524 \text{ S/m}$; $\epsilon_r = 51.528$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/19/2020; Ambient Temp: 20.9°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1745 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), CA_66C ULCA, Body SAR, Back side,
Open Configuration,**

PCC: Ch. 132322, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch. 132124, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 23.80 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.776 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

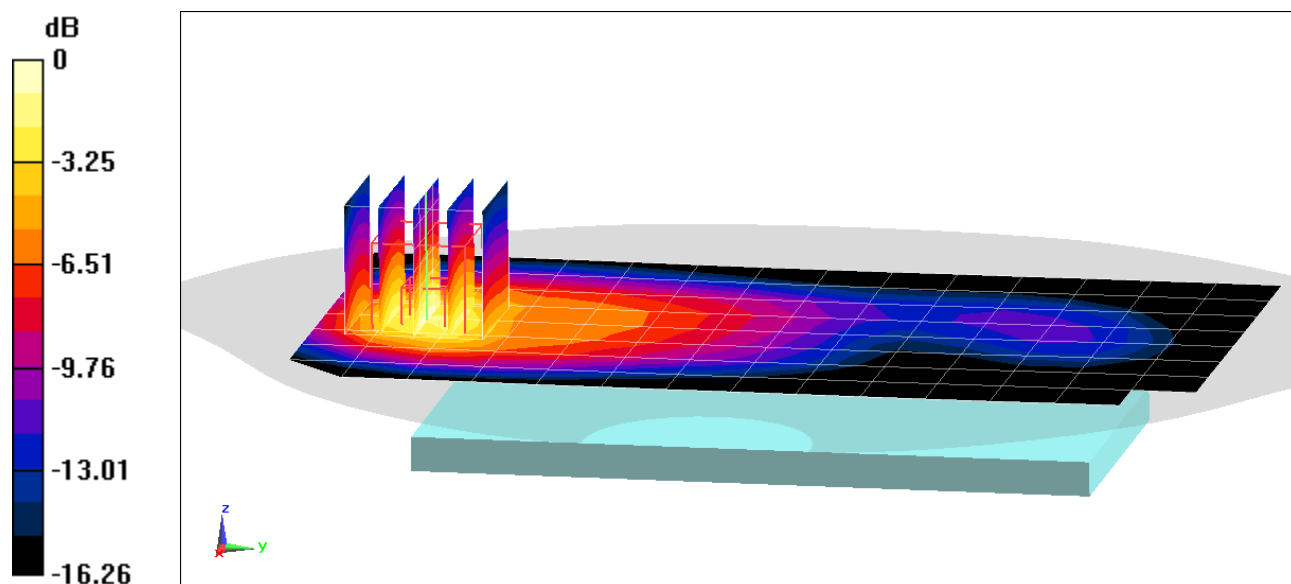

0 dB = 1.10 W/kg = 0.41 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17488

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.535 \text{ S/m}$; $\epsilon_r = 51.851$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 24.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1770 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), CA_66C ULCA, Body SAR, Bottom Edge,
Open Configuration,**

PCC: Ch. 132572, 20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset

PCC: Ch. 132374, 20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset

Area Scan (11x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 23.77 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.812 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

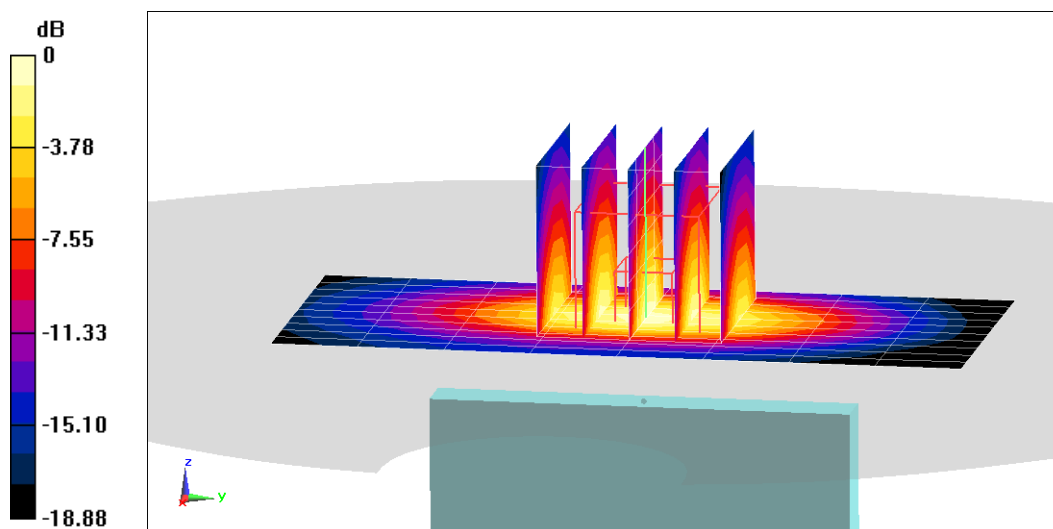

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12599

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.534 \text{ S/m}$; $\epsilon_r = 51.786$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/07/2020; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1860 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch, Open Configuration
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 22.28 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.684 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

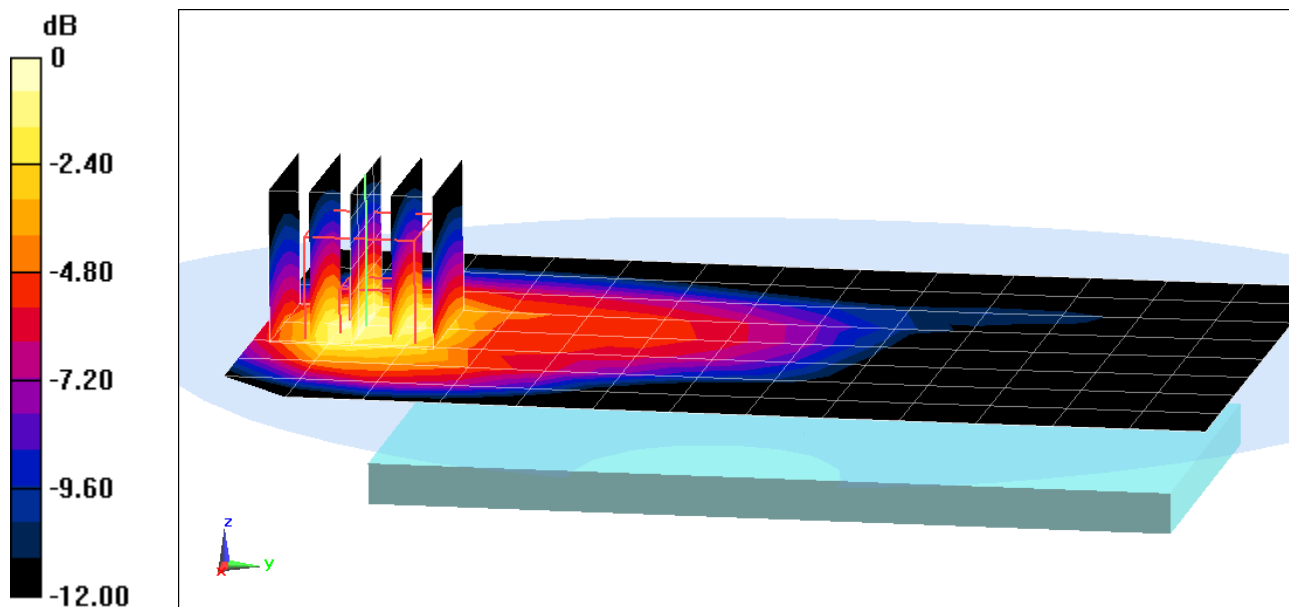

0 dB = 0.964 W/kg = -0.16 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17796

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2310$ MHz; $\sigma = 1.853$ S/m; $\epsilon_r = 52.091$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/17/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7547; ConvF(7.47, 7.47, 7.47) @ 2310 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Body SAR, Back side, Mid.ch, Open Configuration,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.95 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.367 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

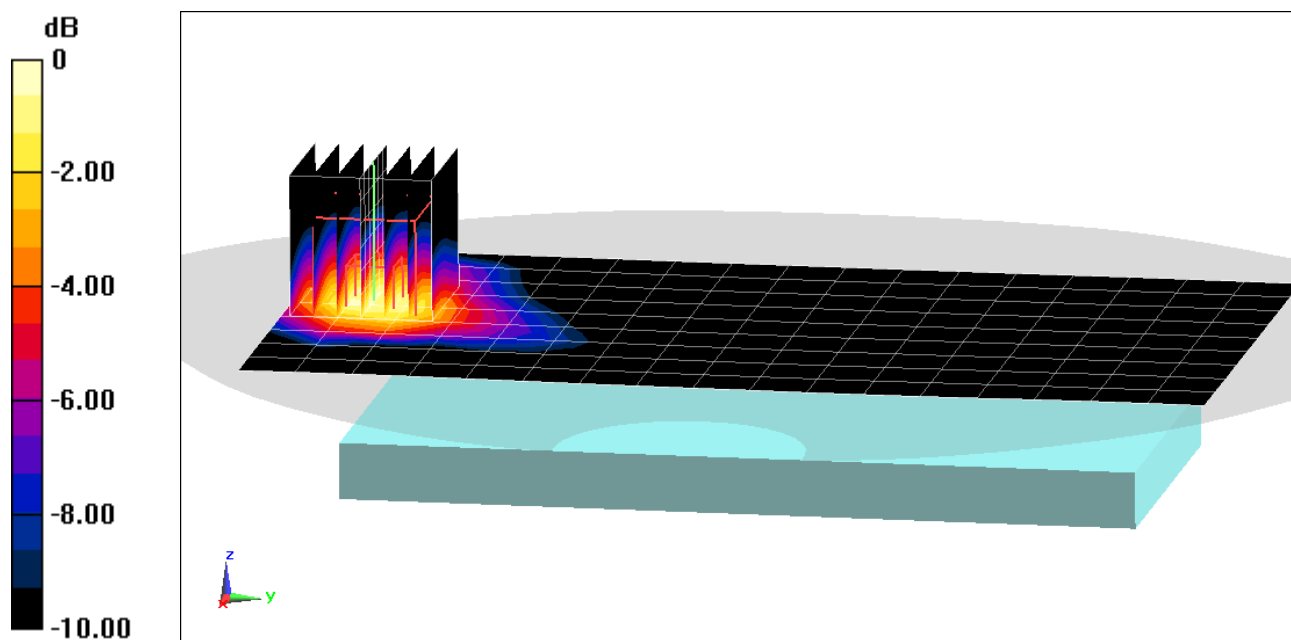

0 dB = 0.548 W/kg = -2.61 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17796

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.853 \text{ S/m}$; $\epsilon_r = 52.091$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/17/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7547; ConvF(7.47, 7.47, 7.47) @ 2310 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Body SAR, Bottom Edge, Mid.ch, Open Configuration,
10 MHz Bandwidth, QPSK, 25 RB, 12 RB Offset**

Area Scan (11x11x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 25.38 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.04 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

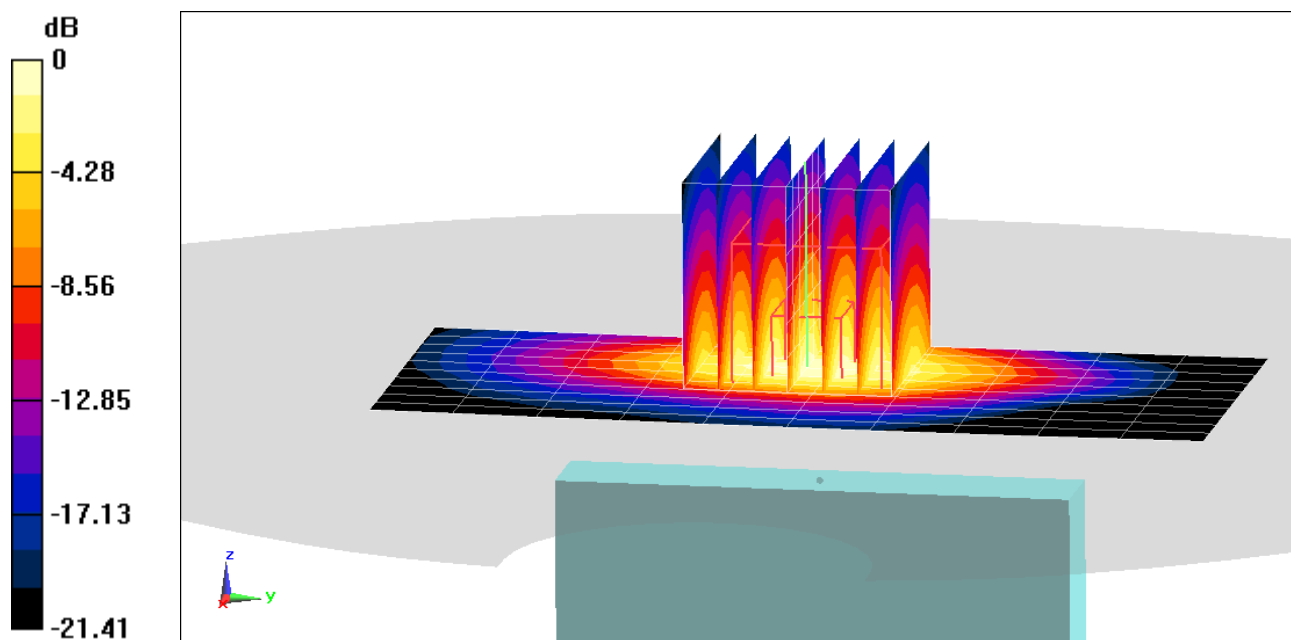

0 dB = 1.68 W/kg = 2.25 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 18646

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2535 \text{ MHz}$; $\sigma = 2.128 \text{ S/m}$; $\epsilon_r = 51.794$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/27/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2535 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Body SAR, Back side, Mid.ch, Open Configuration,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.18 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

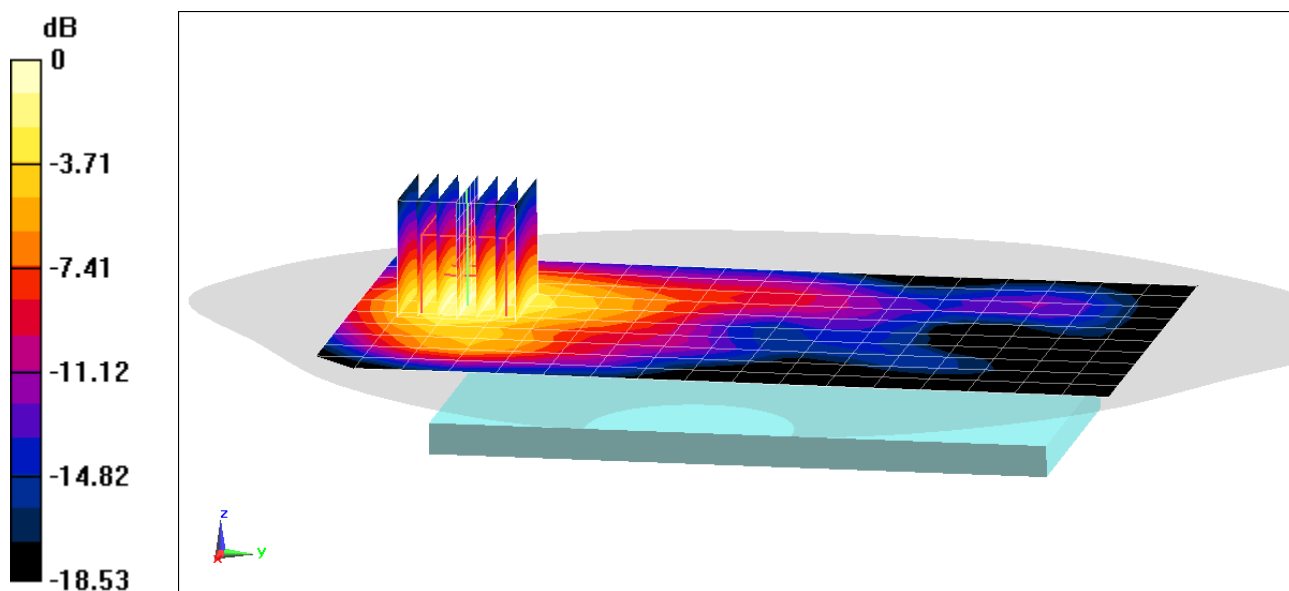

0 dB = 0.575 W/kg = -2.40 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17762

Communication System: UID 0, LTE Band 48; Frequency: 3646.7 MHz; Duty Cycle: 1:1.58

Medium: 3600 Body; Medium parameters used (interpolated):

$f = 3646.7 \text{ MHz}$; $\sigma = 3.533 \text{ S/m}$; $\epsilon_r = 48.986$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/24/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(6.85, 6.85, 6.85) @ 3646.7 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, ULCA, Body SAR, Back side, Open Configuration

PCC: Ch. 56207, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

PCC: Ch. 56009, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 6.963 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.153 W/kg

Smallest distance from source to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

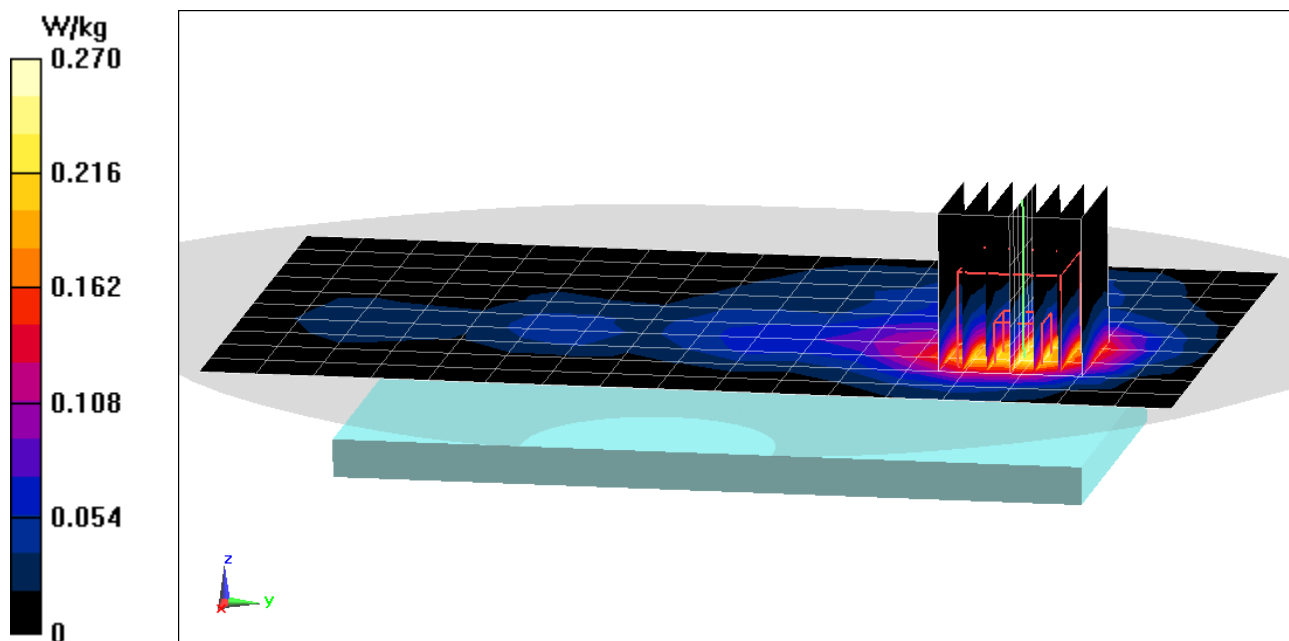

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17762

Communication System: UID 0, LTE Band 48; Frequency: 3646.7 MHz; Duty Cycle: 1:1.58

Medium: 3600 Body; Medium parameters used (interpolated):

$f = 3646.7 \text{ MHz}$; $\sigma = 3.533 \text{ S/m}$; $\epsilon_r = 48.986$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(6.85, 6.85, 6.85) @ 3646.7 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, ULCA, Body SAR, Left Edge, Open Configuration,

PCC: Ch. 56207, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

PCC: Ch. 56009, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (11x18x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x8x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4


Reference Value = 10.55 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.355 W/kg

Smallest distance from source to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.2%

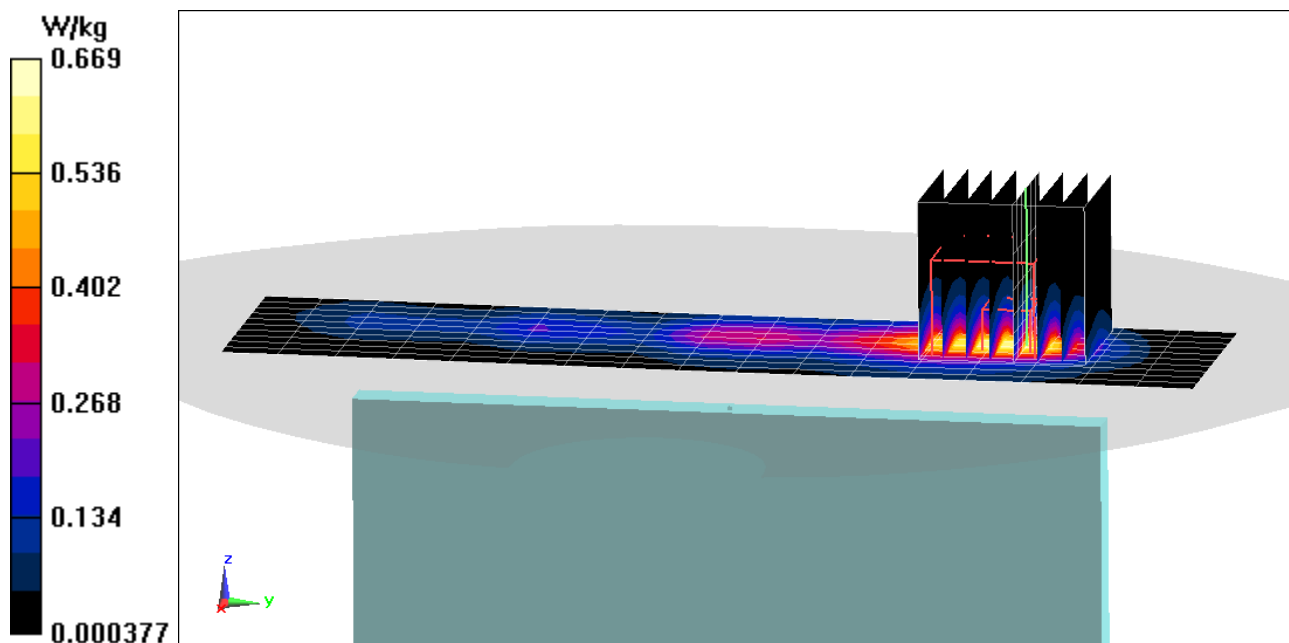

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12664

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body; Medium parameters used:

$f = 2680$ MHz; $\sigma = 2.317$ S/m; $\epsilon_r = 50.258$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/28/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2680 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 41, PC3, ULCA, Body SAR, Back side, Open Configuration,

PCC: Ch. 41490, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch. 41292, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.43 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 19.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

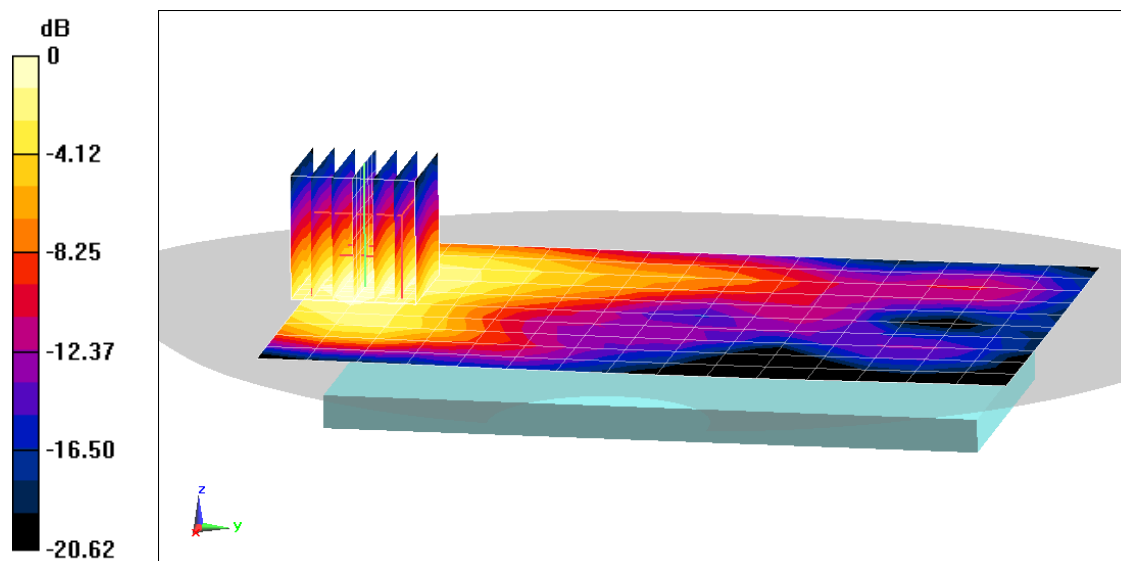

0 dB = 0.439 W/kg = -3.58 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12664

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body; Medium parameters used:

$f = 2680 \text{ MHz}$; $\sigma = 2.317 \text{ S/m}$; $\epsilon_r = 50.258$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/28/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2680 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 41, PC3, ULCA, Body SAR, Bottom Edge, Open Configuration,

PCC: Ch. 41490, 20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset

SCC: Ch. 41292, 20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset

Area Scan (11x10x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.65 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.626 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

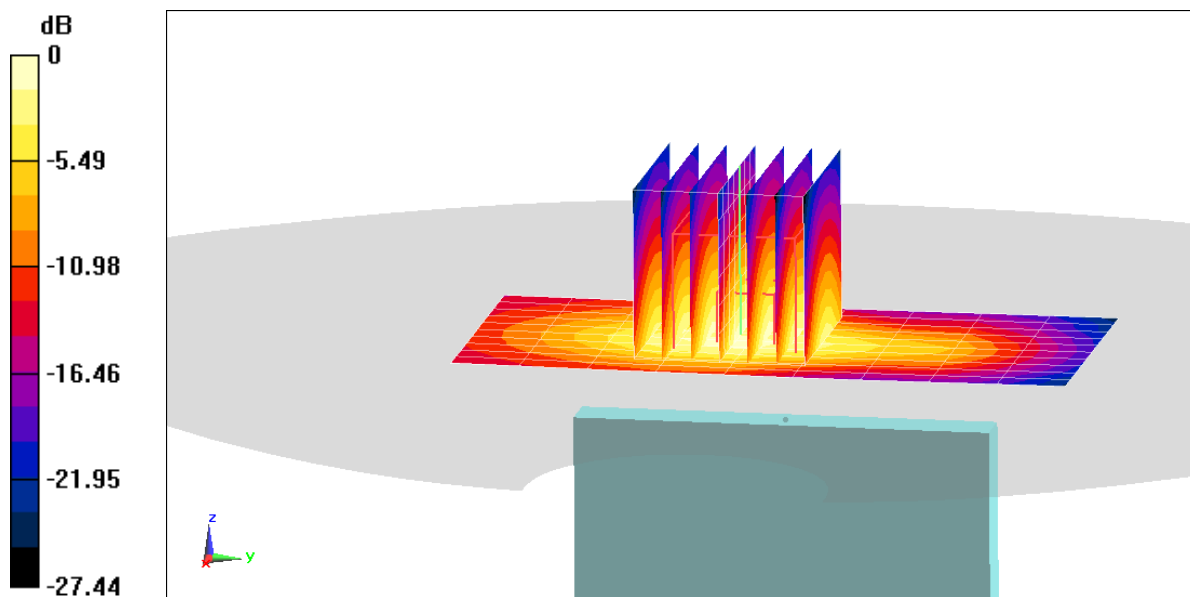

0 dB = 1.05 W/kg = 0.21 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12698

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 54.412$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n71, Body SAR, Back Side, Open Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 136100, 50 RB, 28 RB Offset**

Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.73 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.5%

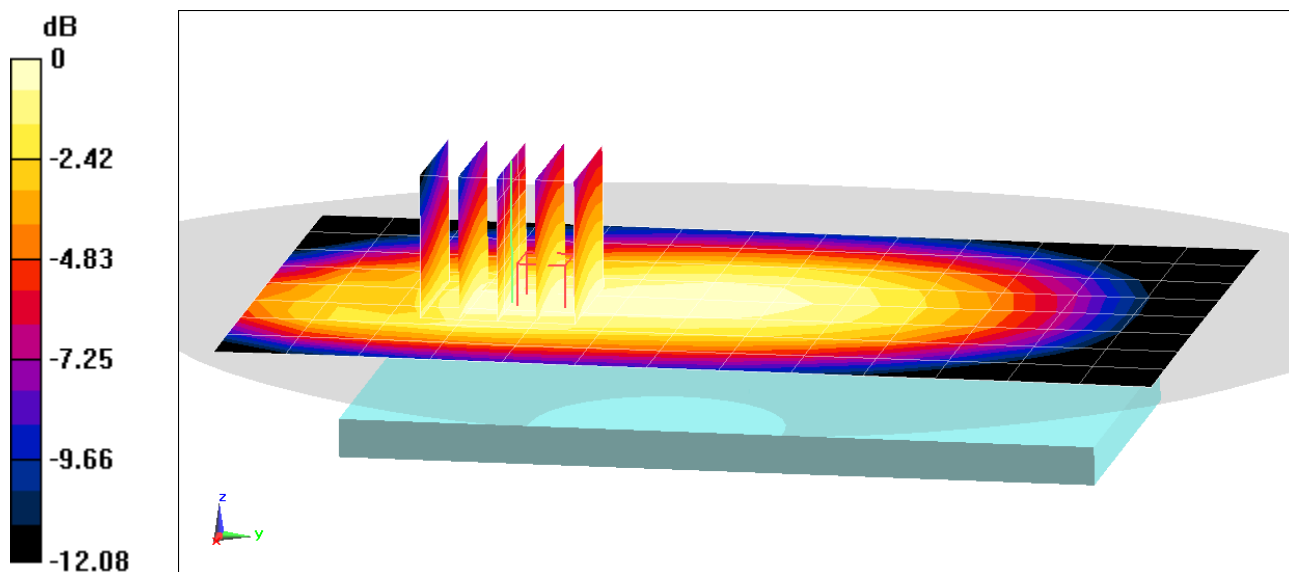

0 dB = 0.236 W/kg = -6.27 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12698

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 54.412$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n71, Body SAR, Right Edge, Open Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 136100, 1 RB, 53 RB Offset**

Area Scan (11x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.67 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 69.7%

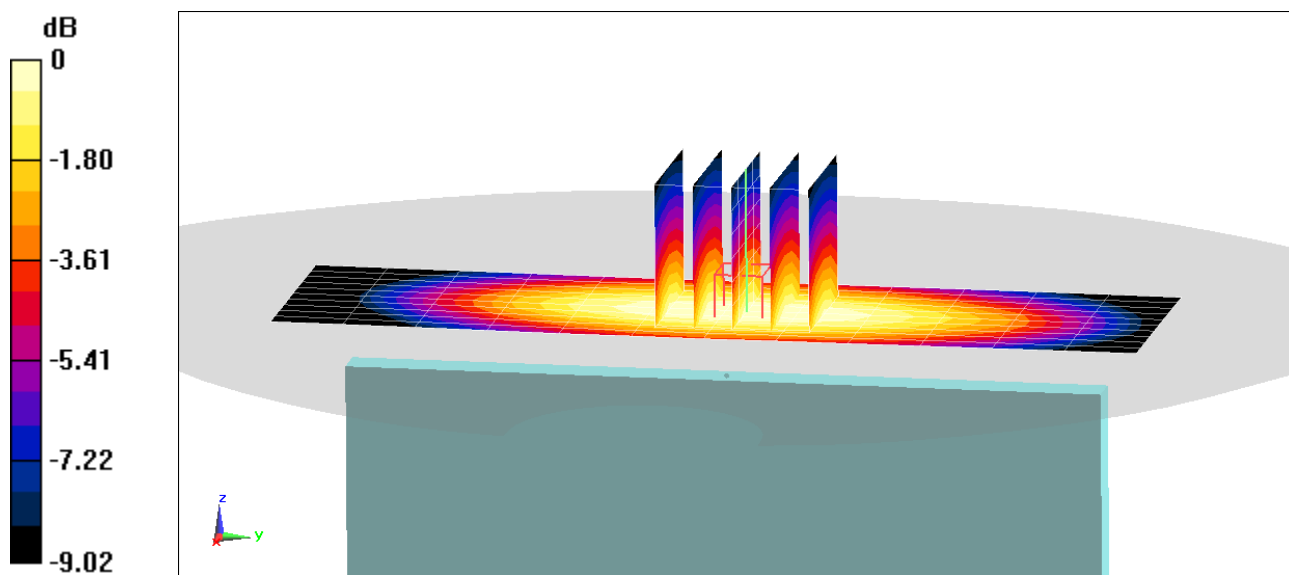

0 dB = 0.391 W/kg = -4.08 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12698

Communication System: UID 0, NR Band n5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n5, Body SAR, Back Side, Closed Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 167300, 50 RB, 28 RB Offset**

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.29 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 22.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

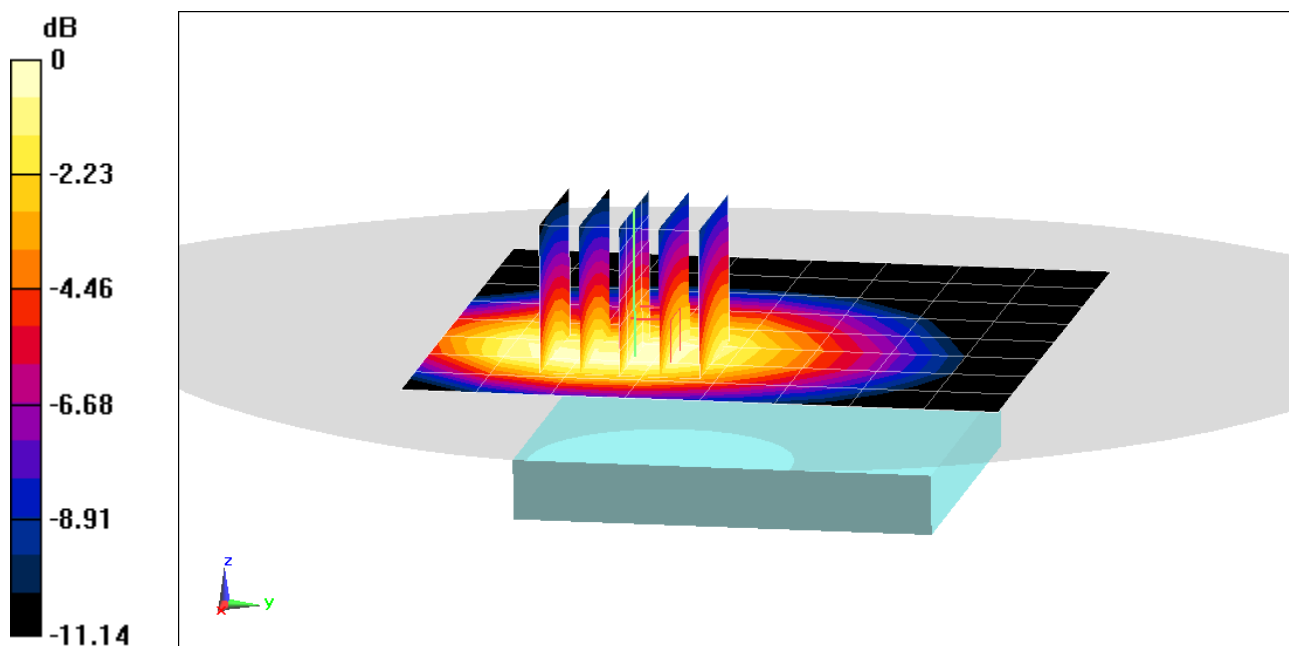

0 dB = 0.359 W/kg = -4.45 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12698

Communication System: UID 0, NR Band n5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: NR Band n5, Body SAR, Back Side, Closed Configuration
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 167300, 50 RB, 28 RB Offset

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.08 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.606 W/kg

SAR(1 g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

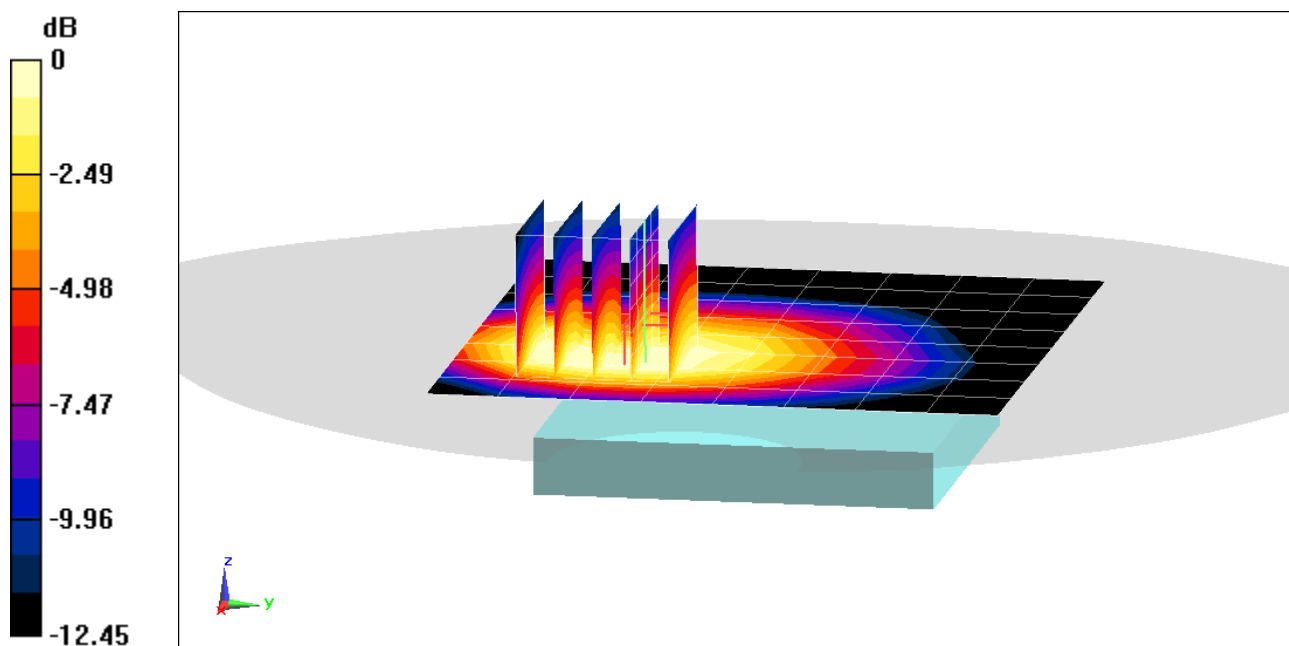

0 dB = 0.515 W/kg = -2.88 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17291

Communication System: UID 0, NR Band n66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.474 \text{ S/m}$; $\epsilon_r = 52.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/22/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1745 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Body SAR, Back Side, Open Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 349000, 50 RB, 28 RB Offset**

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.89 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.576 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

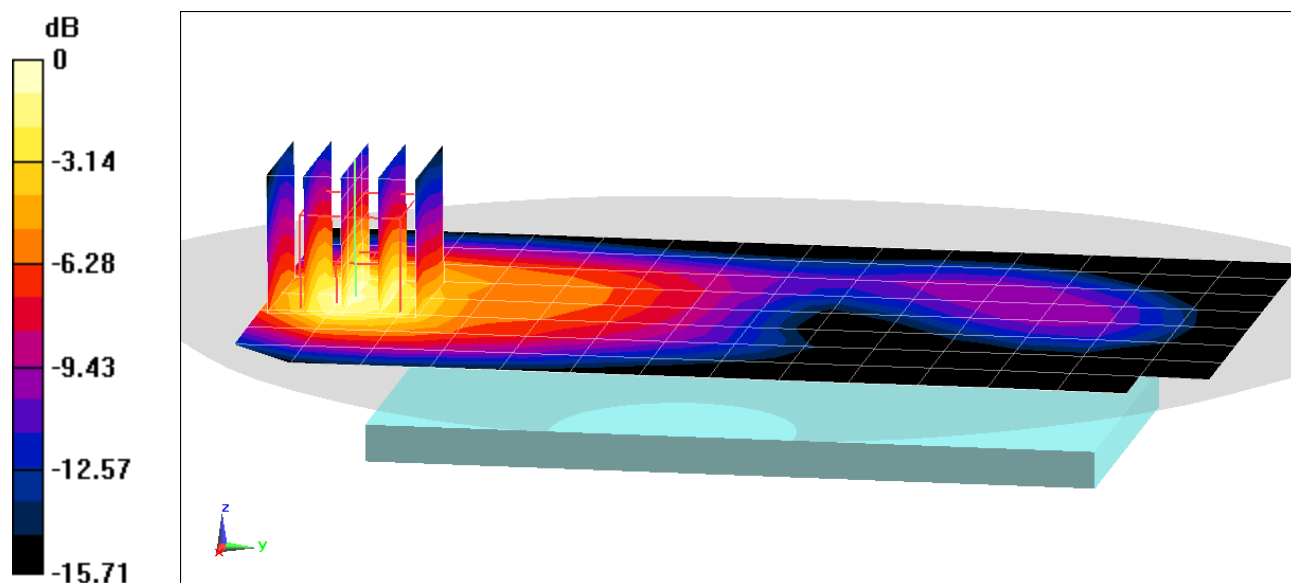

0 dB = 0.787 W/kg = -1.04 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17291

Communication System: UID 0, NR Band n66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 52.322$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/22/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1770 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Body SAR, Bottom Edge, Open Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 354000, 1 RB, 1 RB Offset**

Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 23.48 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.788 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

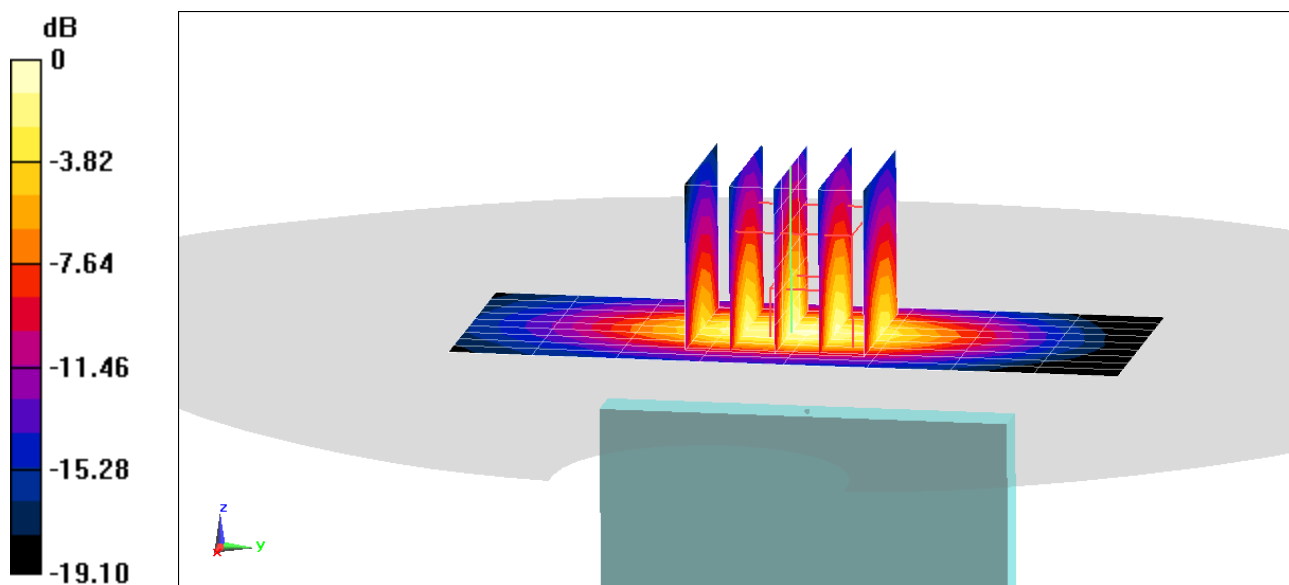

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12706

Communication System: UID 0, NR Band n25; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 52.937$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/10/2020; Ambient Temp: 22.0°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1860 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n25, Body SAR, Back Side, Open Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 372000, 50 RB, 28 RB Offset**

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

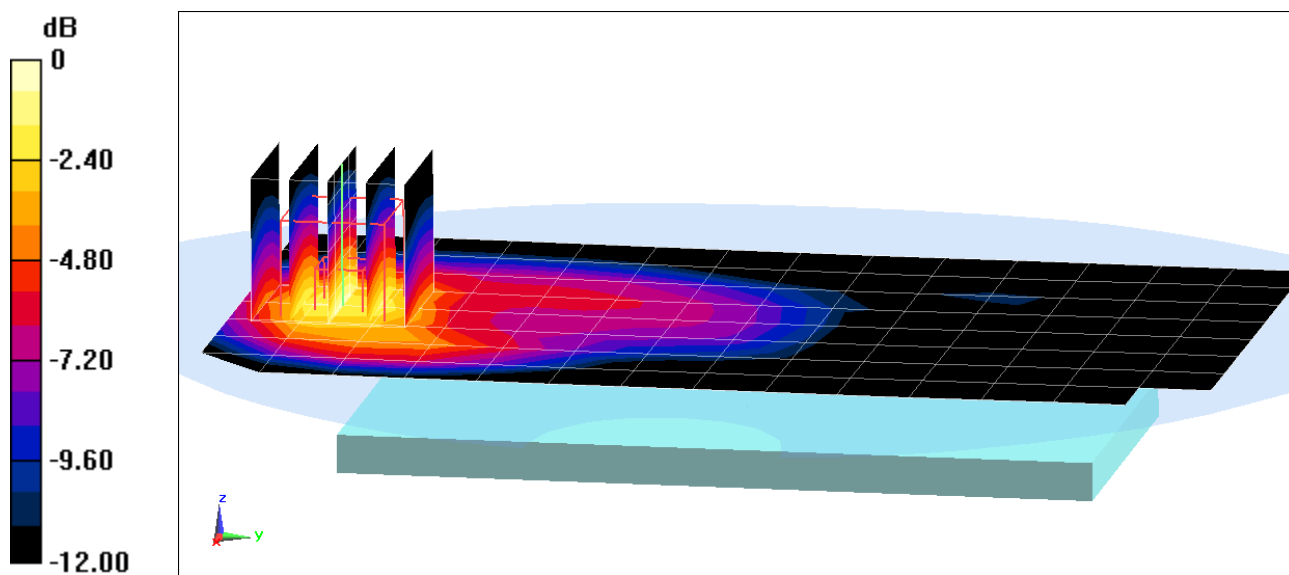

0 dB = 0.586 W/kg = -2.32 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12706

Communication System: UID 0, NR Band n25; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1905 \text{ MHz}$; $\sigma = 1.571 \text{ S/m}$; $\epsilon_r = 52.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/21/2020; Ambient Temp: 21.3°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1905 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n25, Body SAR, Bottom Edge, Open Configuration,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 381000, 1 RB, 53 RB Offset**

Area Scan (11x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.79 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.607 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

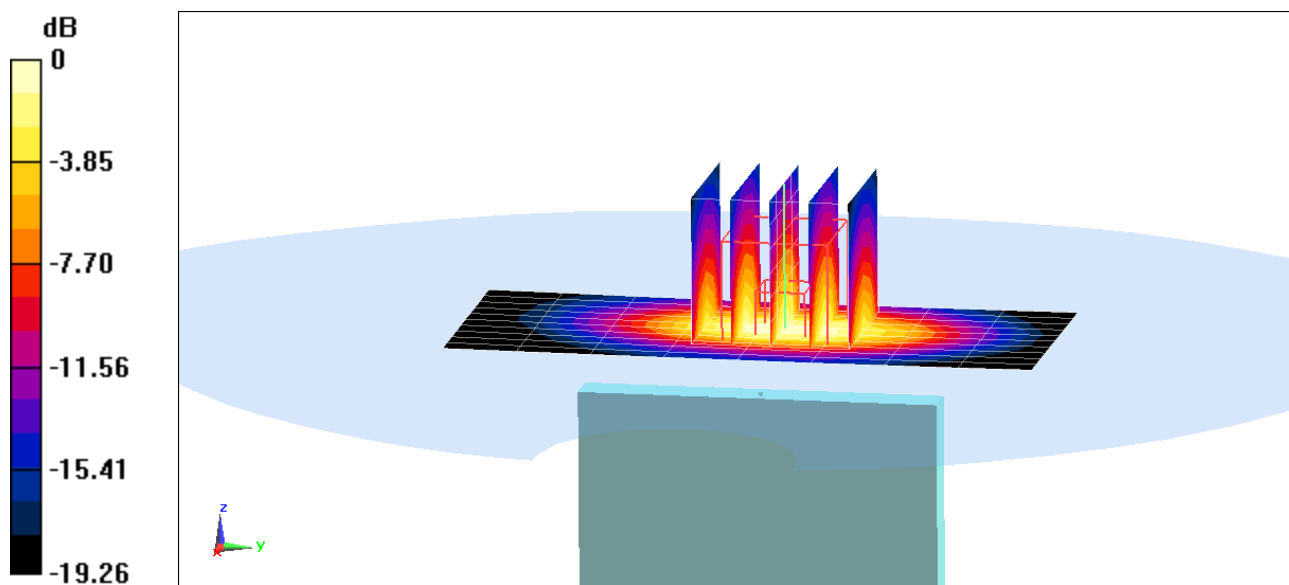

0 dB = 0.946 W/kg = -0.24 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17705

Communication System: UID 0, NR Band n41; Frequency: 2592.99 MHz; Duty Cycle: 1:4
Medium: 2450 Body; Medium parameters used (interpolated):
 $f = 2592.99$ MHz; $\sigma = 2.235$ S/m; $\epsilon_r = 51.02$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/17/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2592.99 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/12/2019
Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n41, Body SAR, Back Side, Open Configuration,
100 MHz Bandwidth, CP-OFDM QPSK, Ch. 518598, 1 RB, 1 RB Offset**

Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.967 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 17.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

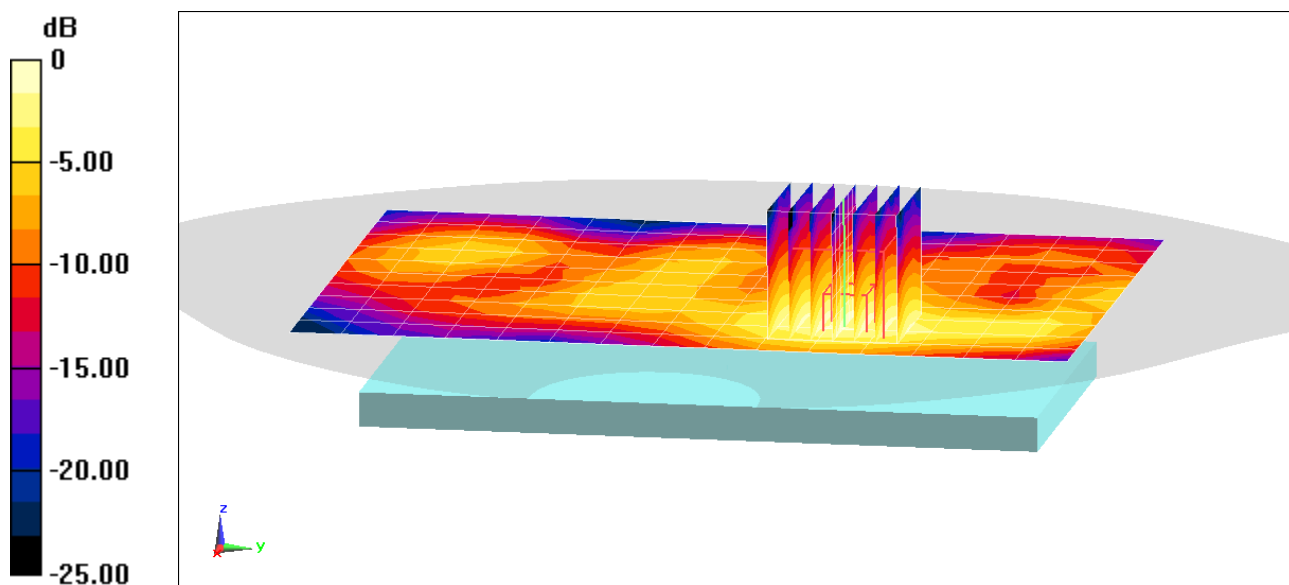

0 dB = 0.157 W/kg = -8.04 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17705


Communication System: UID 0, NR Band n41; Frequency: 2592.99 MHz; Duty Cycle: 1:4
Medium: 2450 Body; Medium parameters used (interpolated):
 $f = 2592.99$ MHz; $\sigma = 2.235$ S/m; $\epsilon_r = 51.02$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/17/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2592.99 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1449; Calibrated: 9/12/2019
Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: NR Band n41, Body SAR, Left Edge, Open Configuration
100 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 518598, 1 RB, 137 RB Offset

Area Scan (11x16x1): Measurement grid: dx=5mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.51 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.650 W/kg
SAR(1 g) = 0.310 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 48.6%

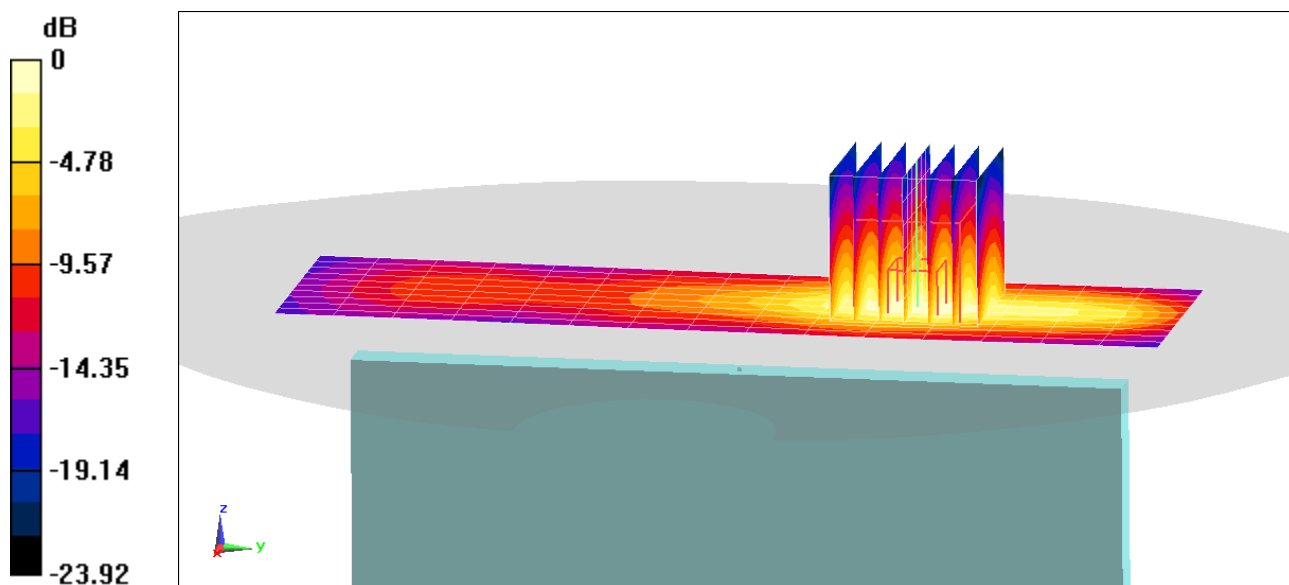

0 dB = 0.516 W/kg = -2.87 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 44923

Communication System: UID 0, IEEE 802.11n; Frequency: 2457 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2457 \text{ MHz}$; $\sigma = 1.997 \text{ S/m}$; $\epsilon_r = 51.436$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07/11/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2457 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11n, 20 MHz Bandwidth, Body SAR, Ch 10,
Back Side, Open Configuration**

Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.85 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

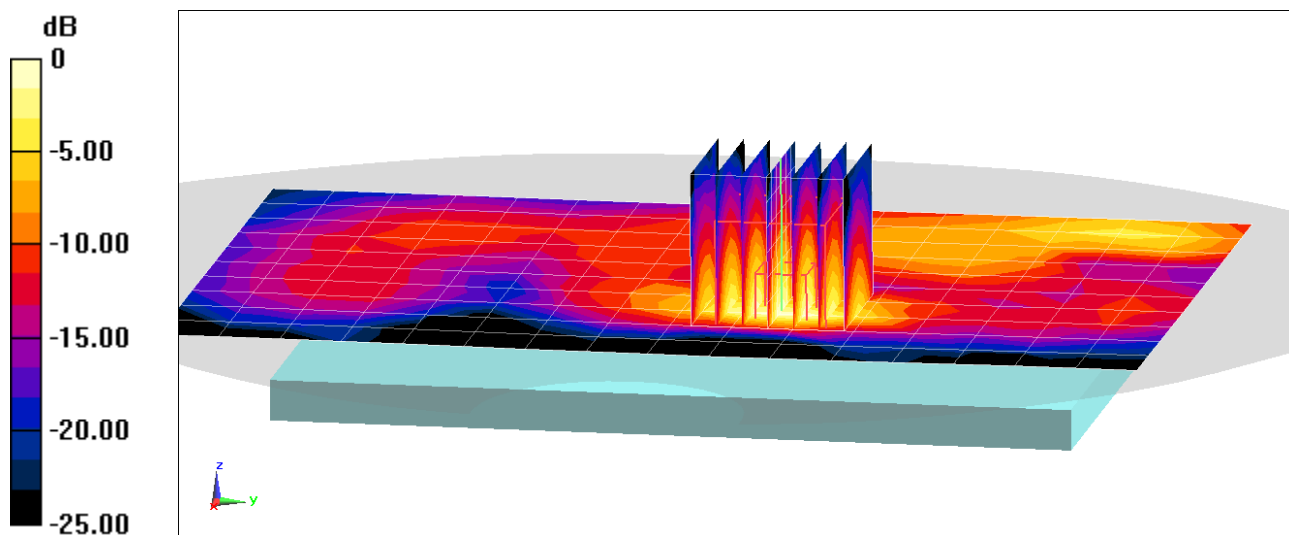

0 dB = 0.343 W/kg = -4.65 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 44923

Communication System: UID 0, 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 1.996 \text{ S/m}$; $\epsilon_r = 50.736$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07/02/2020; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2412 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11b, Antenna 2, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Front Side, Closed Configuration

Area Scan (11x12x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 0.4970 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.620 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45%

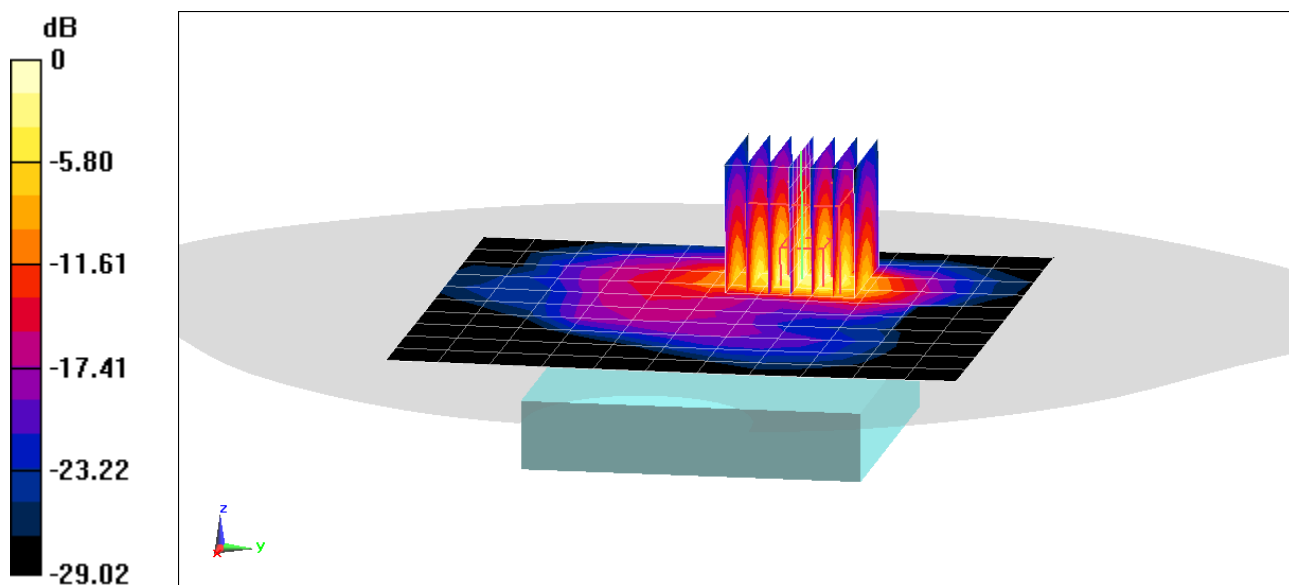

0 dB = 1.16 W/kg = 0.64 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 0009H

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5620 \text{ MHz}$; $\sigma = 5.934 \text{ S/m}$; $\epsilon_r = 46.948$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 6/14/2020; Ambient Temp: 22.6°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7538; ConvF(4.09, 4.09, 4.09) @ 5620 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11n, UNII-2C, MIMO, 20 MHz Bandwidth, Body SAR, Ch 124, 13 Mbps,
Back Side, Open Configuration**

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 6.093 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.841 W/kg

SAR(1 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

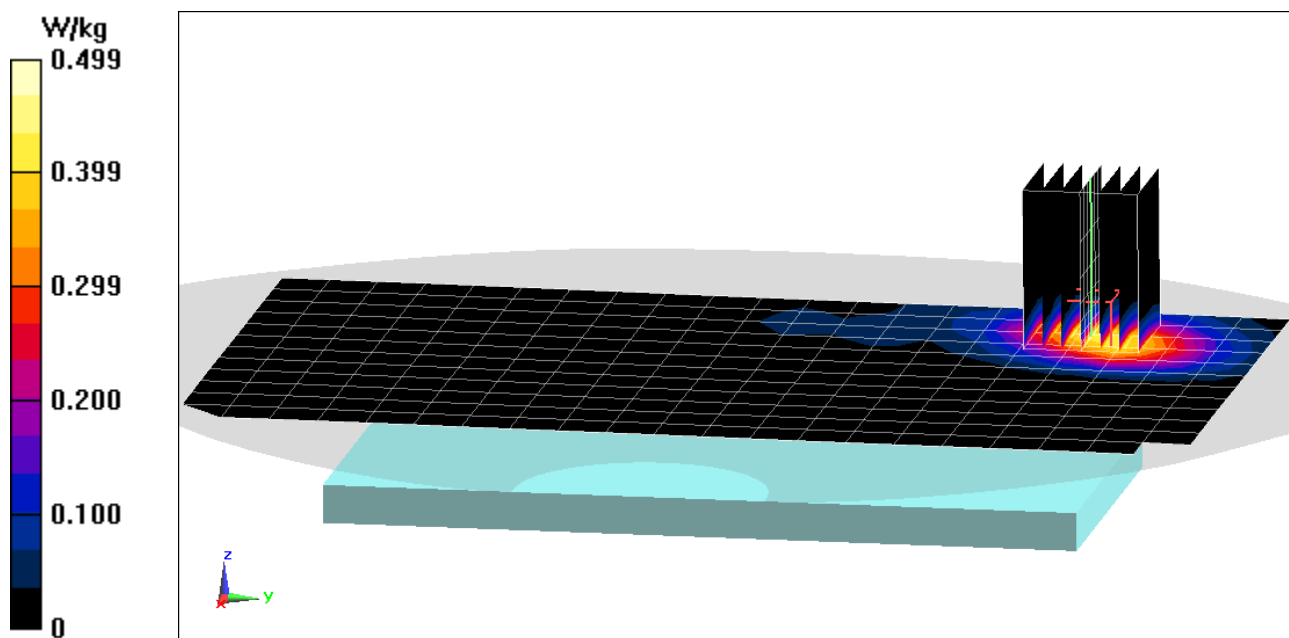

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 0009H

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5785 \text{ MHz}$; $\sigma = 6.159 \text{ S/m}$; $\epsilon_r = 46.687$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/14/2020; Ambient Temp: 22.6°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7538; ConvF(4.17, 4.17, 4.17) @ 5785 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11n, U-NII-3, MIMO, 20 MHz Bandwidth, Body SAR, Ch 149, 13 Mbps,
Right Edge, Open Configuration**

Area Scan (10x22x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 1.944 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

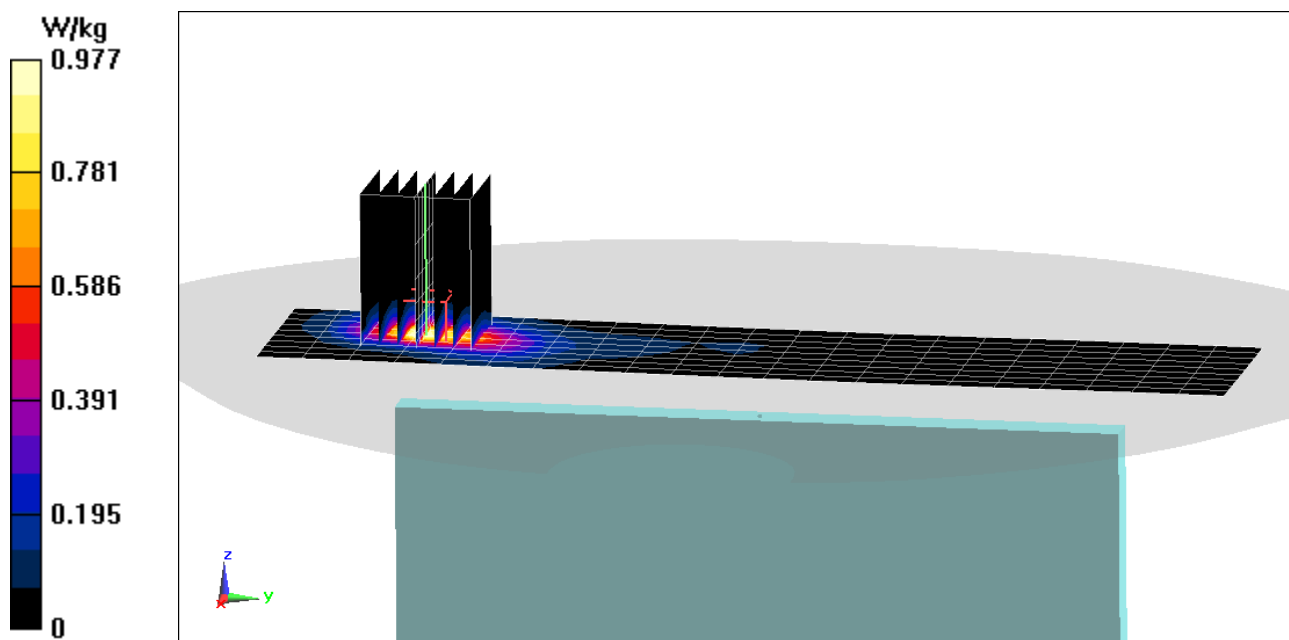

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 44923

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.031 \text{ S/m}$; $\epsilon_r = 50.988$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/28/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2441 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Antenna 1, Body SAR, Ch 39, 1 Mbps, Back Side, Open Configuration

Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 5.093 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 52.1%

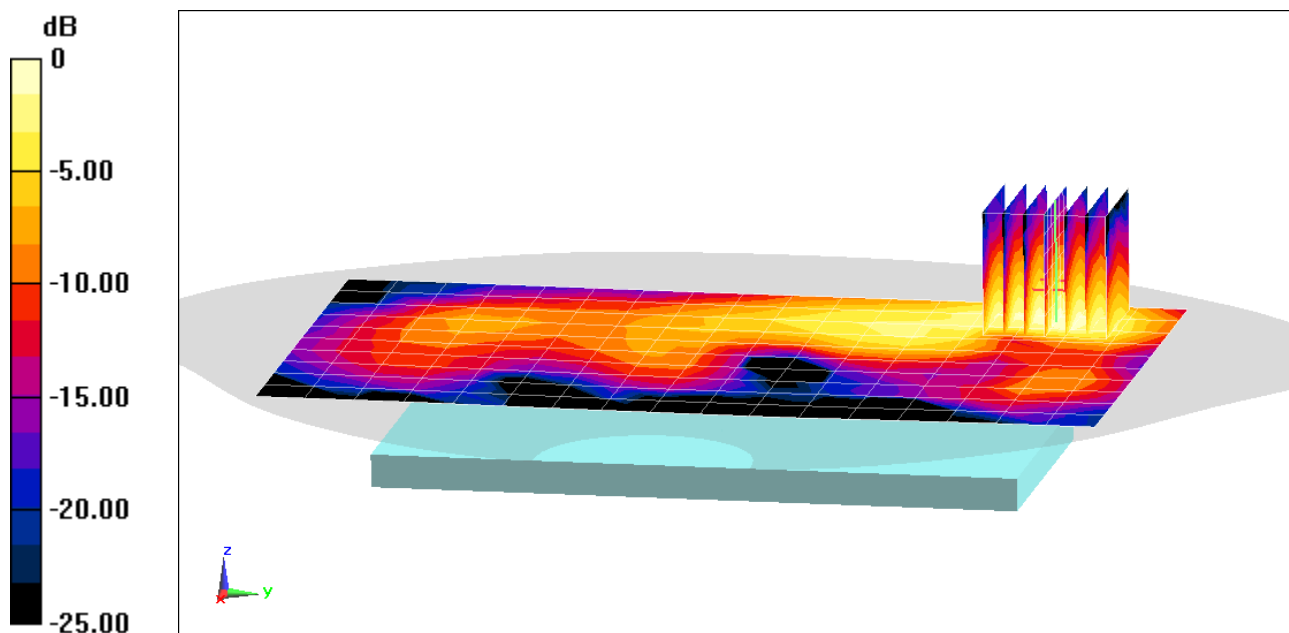

0 dB = 0.0741 W/kg = -11.30 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 44923

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.031 \text{ S/m}$; $\epsilon_r = 50.988$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/28/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2441 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Antenna 1, Body SAR, Ch 39, 1 Mbps, Right Edge, Open Configuration,

Area Scan (10x16x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 9.798 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

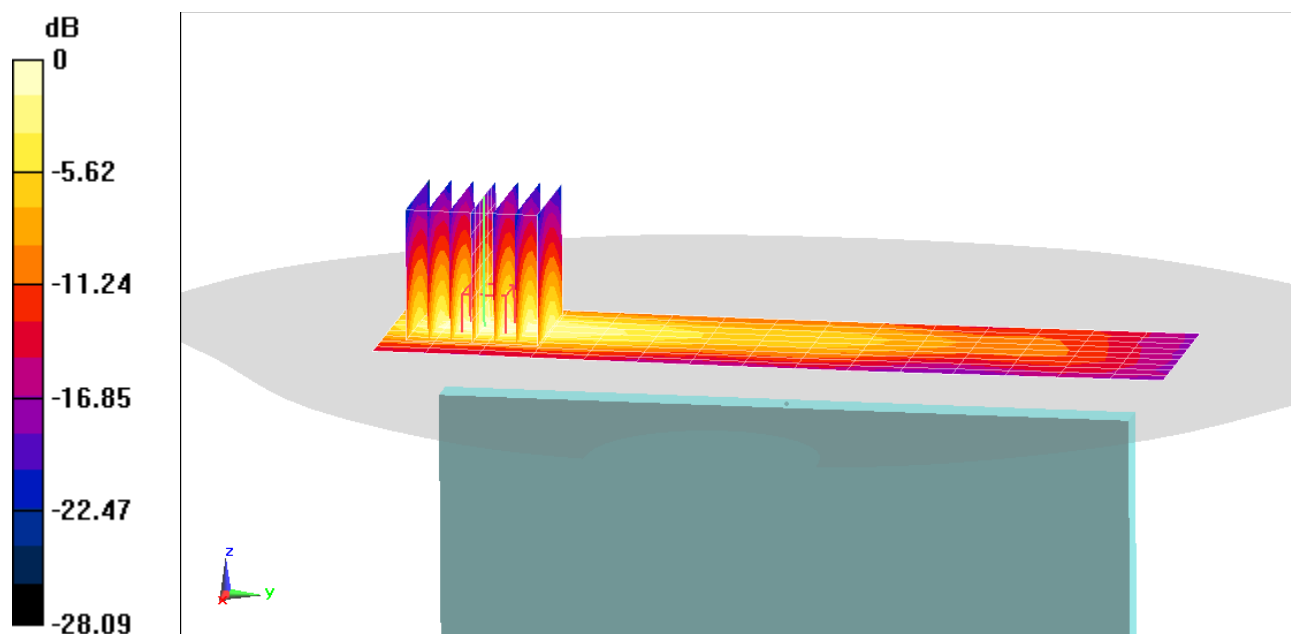

0 dB = 0.284 W/kg = -5.47 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.533 \text{ S/m}$; $\epsilon_r = 51.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 05/31/2020; Ambient Temp: 23.3°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 1900, Phablet SAR, Bottom Edge, Mid.ch, 3 Tx Slots

Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (10x10x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 54.55 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 11.8 W/kg

SAR(10 g) = 1.77 W/kg

Smallest distance from peaks to all points 3 dB below = 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.8%

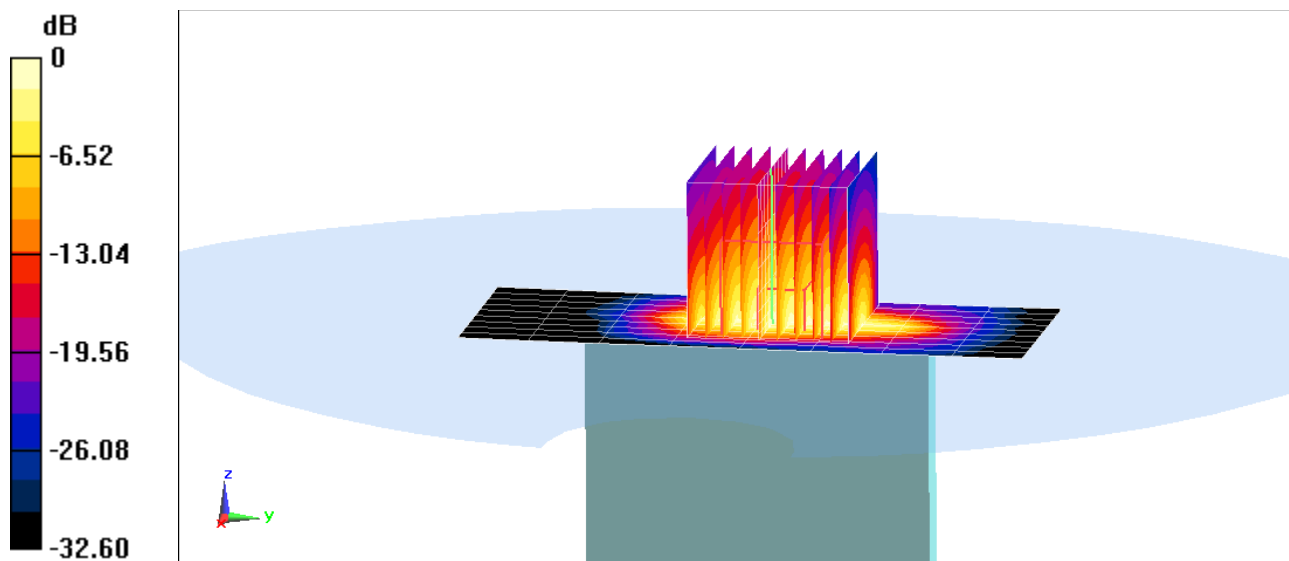

0 dB = 7.86 W/kg = 8.95 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17283

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1712.4$ MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1712.4 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Phablet SAR, Bottom Edge, Low.ch

Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (10x10x8)/Cube 0: Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4


Reference Value = 59.32 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 12.3 W/kg

SAR(10 g) = 1.68 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.7%

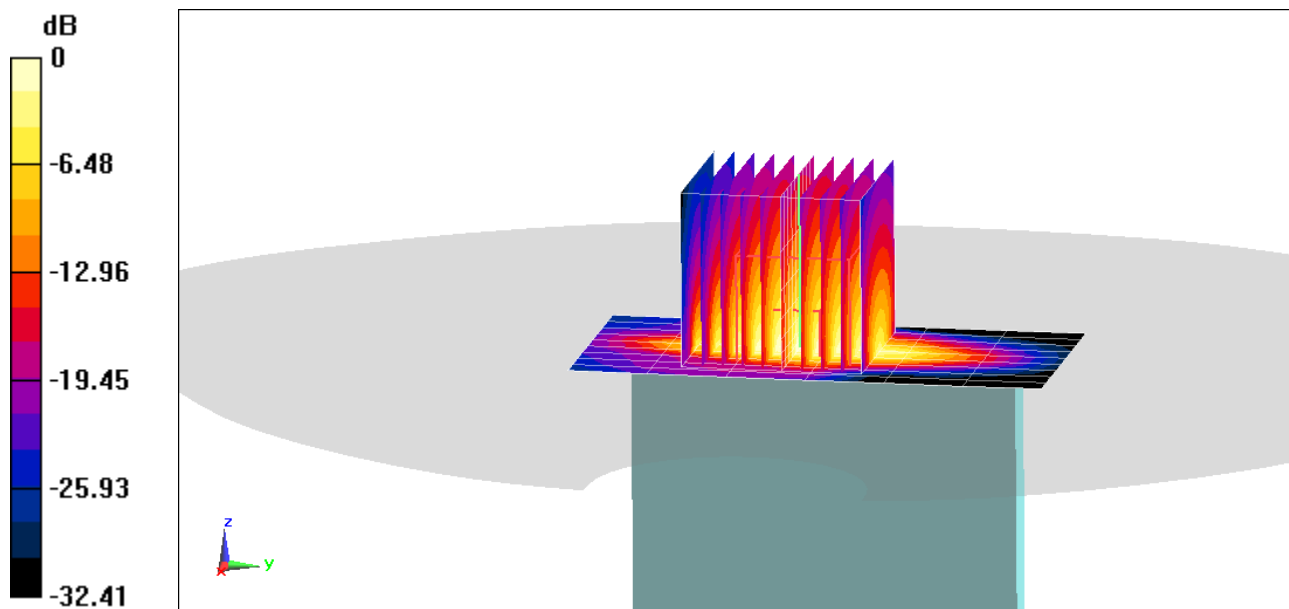

0 dB = 8.04 W/kg = 9.05 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1852.4$ MHz; $\sigma = 1.505$ S/m; $\epsilon_r = 53.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 05/26/2020; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1852.4 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Phablet SAR, Bottom Edge, Low.ch

Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (10x10x8)/Cube 0: Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4


Reference Value = 64.49 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(10 g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

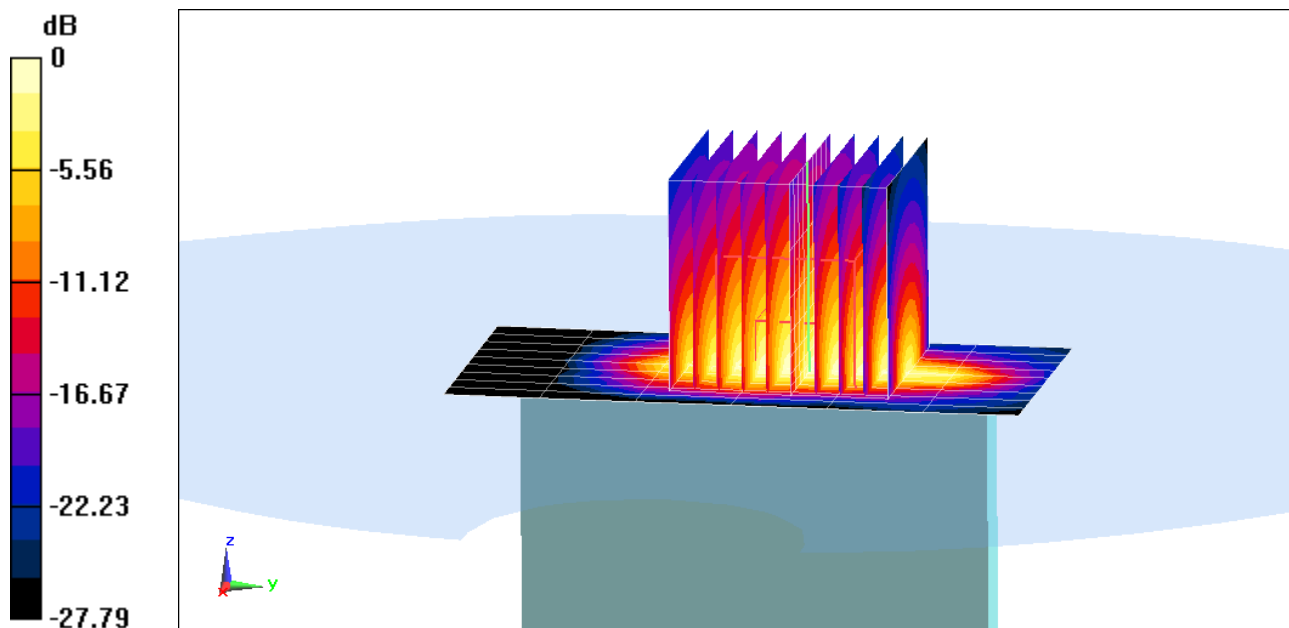

0 dB = 9.90 W/kg = 9.96 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12540

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1851.25$ MHz; $\sigma = 1.502$ S/m; $\epsilon_r = 52.309$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/03/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1851.25 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev. 0, Phablet SAR, Bottom Edge, Low.ch

Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (10x10x8)/Cube 0: Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4


Reference Value = 54.78 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 11.1 W/kg

SAR(10 g) = 1.58 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.3%

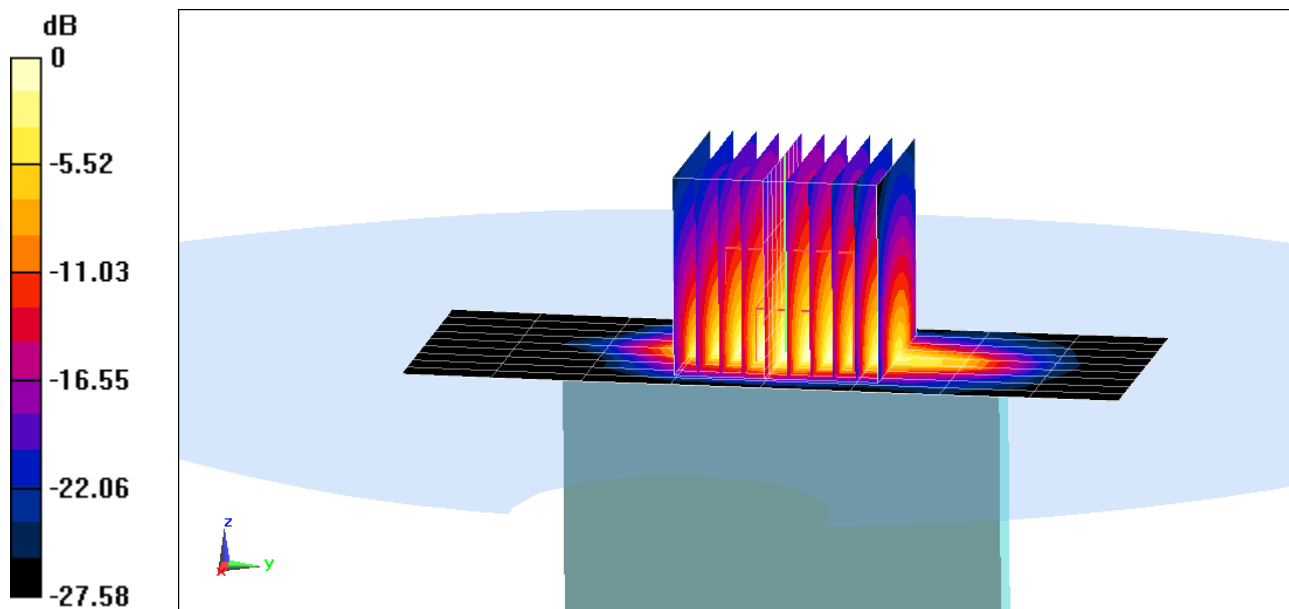

0 dB = 7.18 W/kg = 8.56 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17488

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 52.322$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/22/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1770 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), CA_66C ULCA, Phablet SAR, Bottom Edge,

PCC: Ch. 132572, 20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset

SCC: Ch. 132374, 20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset

Area Scan (11x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (13x14x8)/Cube 0: Measurement grid: $dx=2.8\text{mm}$, $dy=2.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 61.57 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 14.2 W/kg

SAR(10 g) = 2.08 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

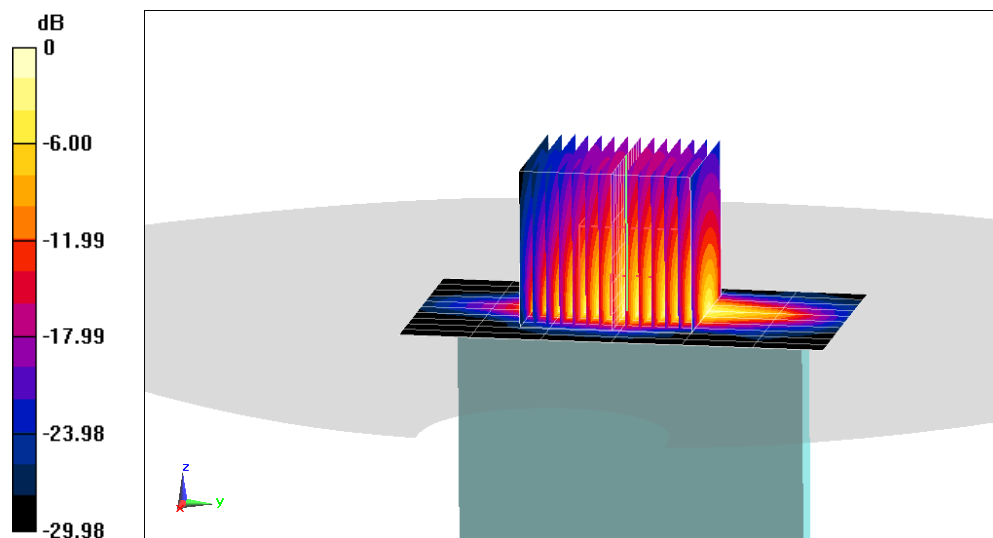

0 dB = 9.94 W/kg = 9.97 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12599

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.52 \text{ S/m}$; $\epsilon_r = 52.408$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/21/2020; Ambient Temp: 21.3°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1860 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Phablet SAR, Bottom Edge, Low.ch,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (11x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (10x11x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 52.43 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(10 g) = 1.72 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.7%

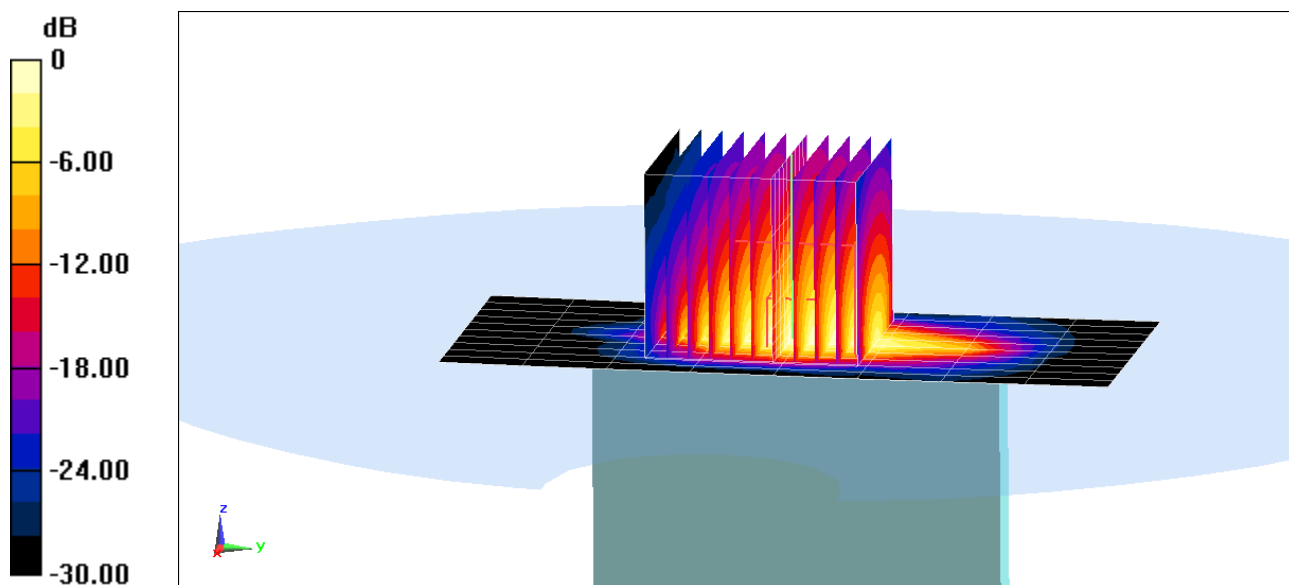

0 dB = 7.72 W/kg = 8.88 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17796

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.794 \text{ S/m}$; $\epsilon_r = 51.507$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/24/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7552; ConvF(7.52, 7.52, 7.52) @ 2310 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 30, Phablet SAR, Bottom Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 25 RB, 12 RB Offset**

Area Scan (11x11x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 53.76 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(10 g) = 1.64 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 36.5%

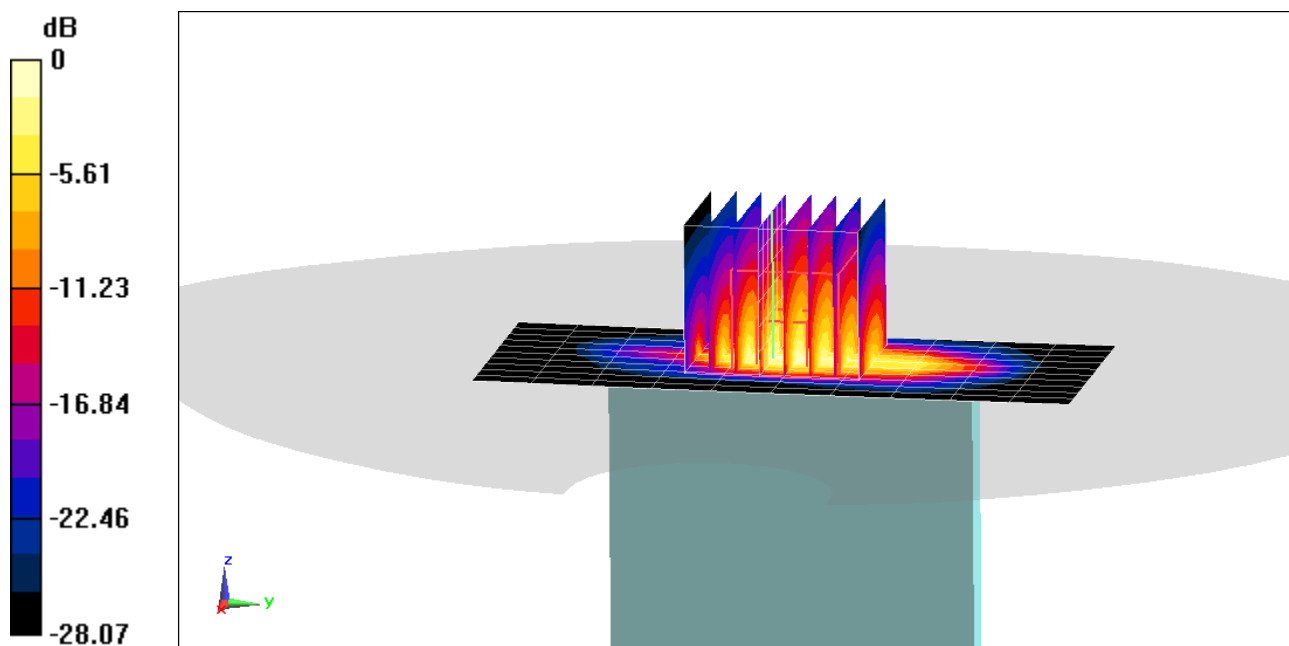

0 dB = 9.07 W/kg = 9.58 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 18646

Communication System: UID 0, LTE Band 7; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2510 \text{ MHz}$; $\sigma = 2.069 \text{ S/m}$; $\epsilon_r = 51.373$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/30/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7552; ConvF(7.47, 7.47, 7.47) @ 2510 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Phablet SAR, Bottom Edge, Low.ch,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (15x11x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (14x14x8)/Cube 0: Measurement grid: $dx=2.4\text{mm}$, $dy=2.4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 41.23 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 14.7 W/kg

SAR(10 g) = 0.995 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

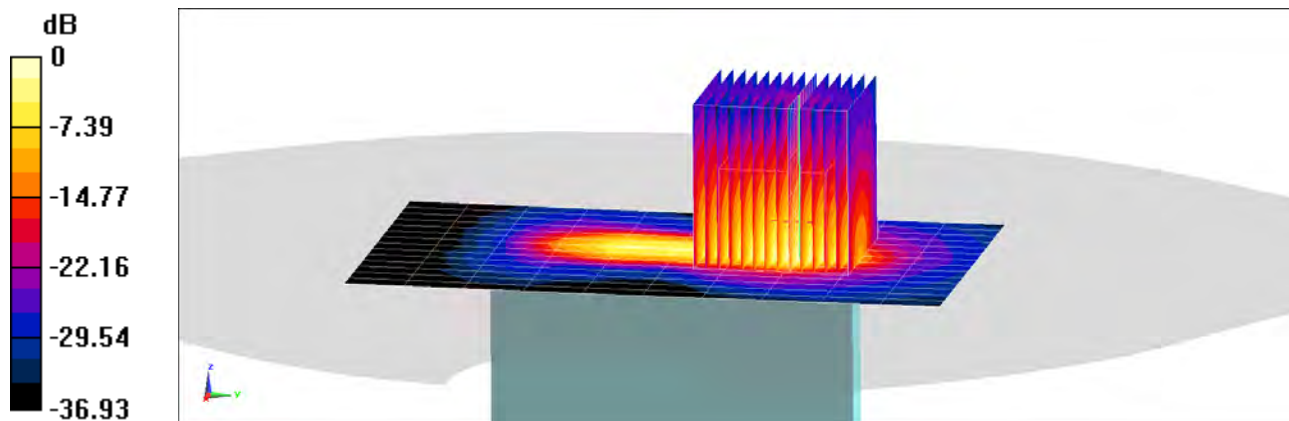

0 dB = 8.14 W/kg = 9.11 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12664

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2680 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used:

$f = 2680 \text{ MHz}$; $\sigma = 2.302 \text{ S/m}$; $\epsilon_r = 50.727$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/30/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2680 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 41, PC2, ULCA, Phablet SAR, Back side,
PCC: Ch. 41490, 20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset
SCC: Ch. 41292, 20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset

Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 26.28 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 5.47 W/kg

SAR(10 g) = 0.818 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.7%

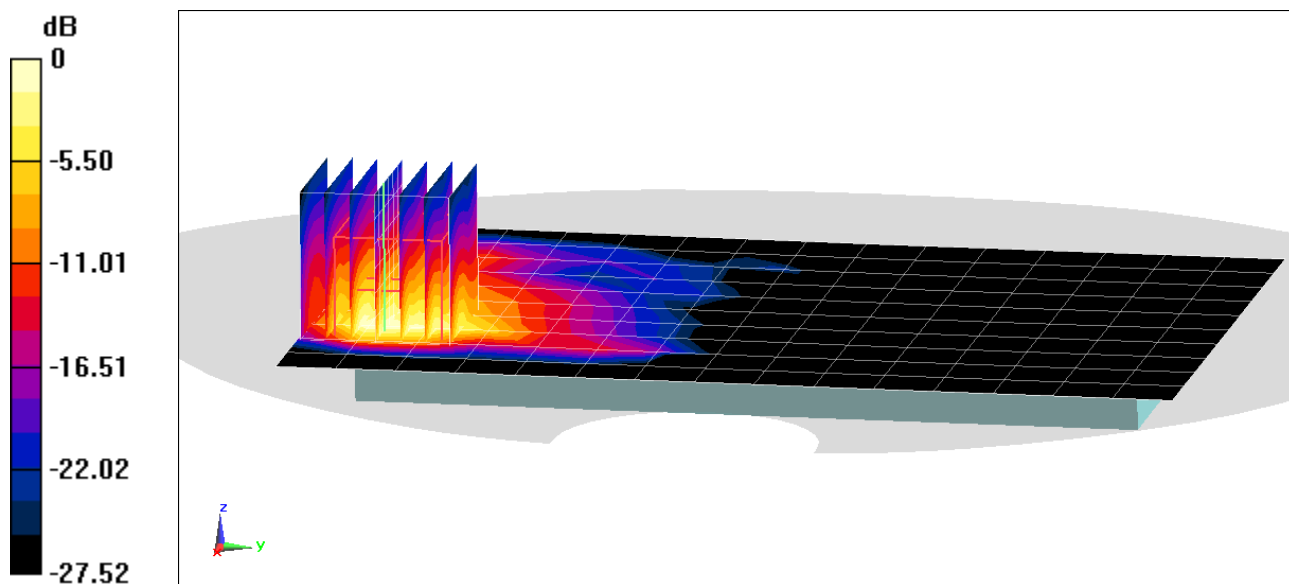

0 dB = 3.72 W/kg = 5.71 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 17291

Communication System: UID 0, NR Band n66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 52.322$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/22/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1770 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Phablet SAR, Bottom Edge,
20 MHz Bandwidth, DFT-s-OFDM QPSK, Ch. 354000, 50 RB, 0 RB Offset**

Area Scan (11x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (13x14x8)/Cube 0: Measurement grid: $dx=2.8\text{mm}$, $dy=2.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 57.81 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(10 g) = 1.93 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.8%

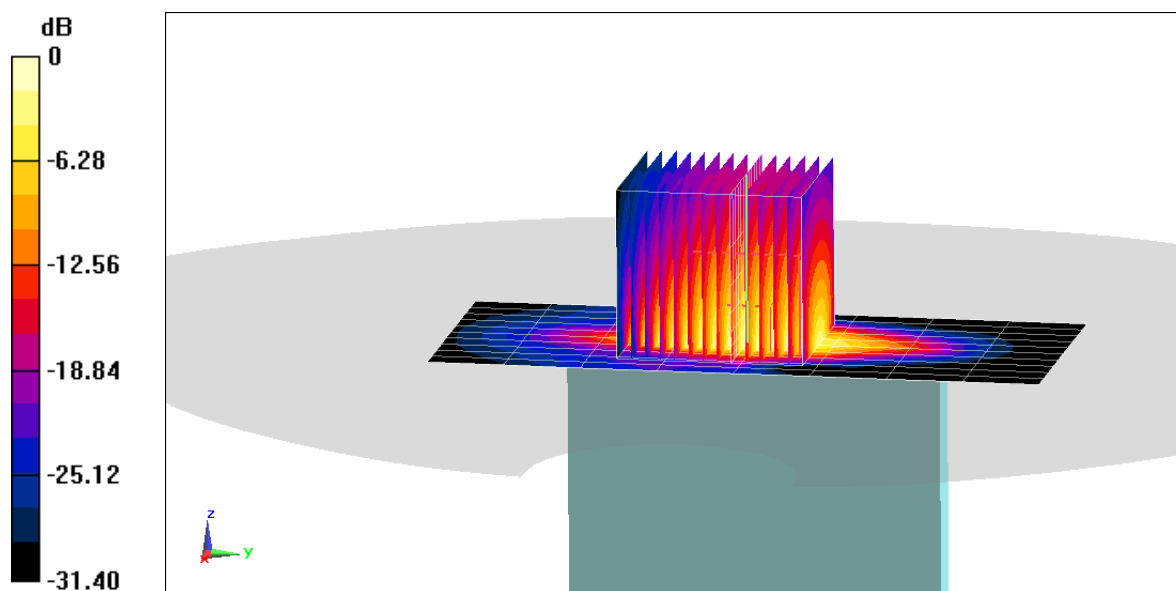

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 12706

Communication System: UID 0, NR Band n25; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1905 \text{ MHz}$; $\sigma = 1.571 \text{ S/m}$; $\epsilon_r = 52.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/21/2020; Ambient Temp: 21.3°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1905 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n25, Phablet SAR, Bottom Edge,
20 MHz Bandwidth, CP-OFDM QPSK, Ch. 381000, 1 RB, 1 RB Offset**

Area Scan (11x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (10x10x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4


Reference Value = 42.90 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 7.42 W/kg

SAR(10 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 70.6%

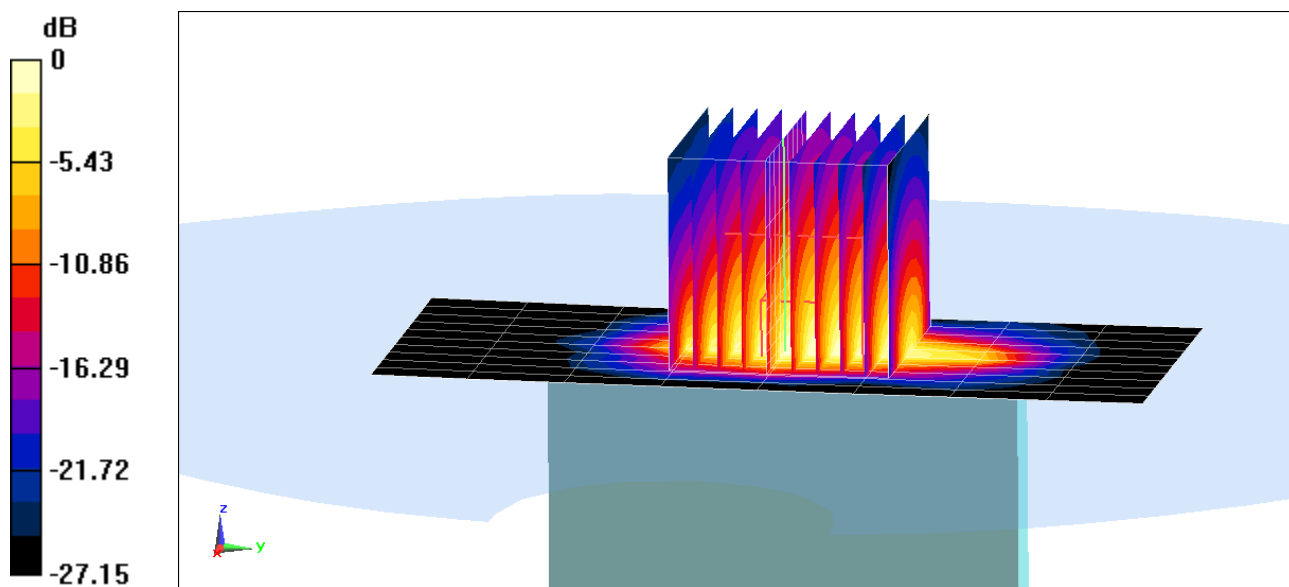

0 dB = 4.54 W/kg = 6.57 dBW/kg

PCTEST

DUT: A3LSMF707U; Type: Portable Handset; Serial: 0009H

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5620$ MHz; $\sigma = 5.901$ S/m; $\epsilon_r = 47.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06/01/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(4.22, 4.22, 4.22) @ 5620 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth, Antenna 1, Phablet SAR,
Ch 124, 6 Mbps, Right Edge**

Area Scan (10x22x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (17x17x8)/Cube 0: Measurement grid: dx=1.9mm, dy=1.9mm, dz=1.4mm; Graded Ratio: 1.4


Reference Value = 39.22 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 54.9 W/kg

SAR(10 g) = 1.43 W/kg

Smallest distance from peaks to all points 3 dB below = 3 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

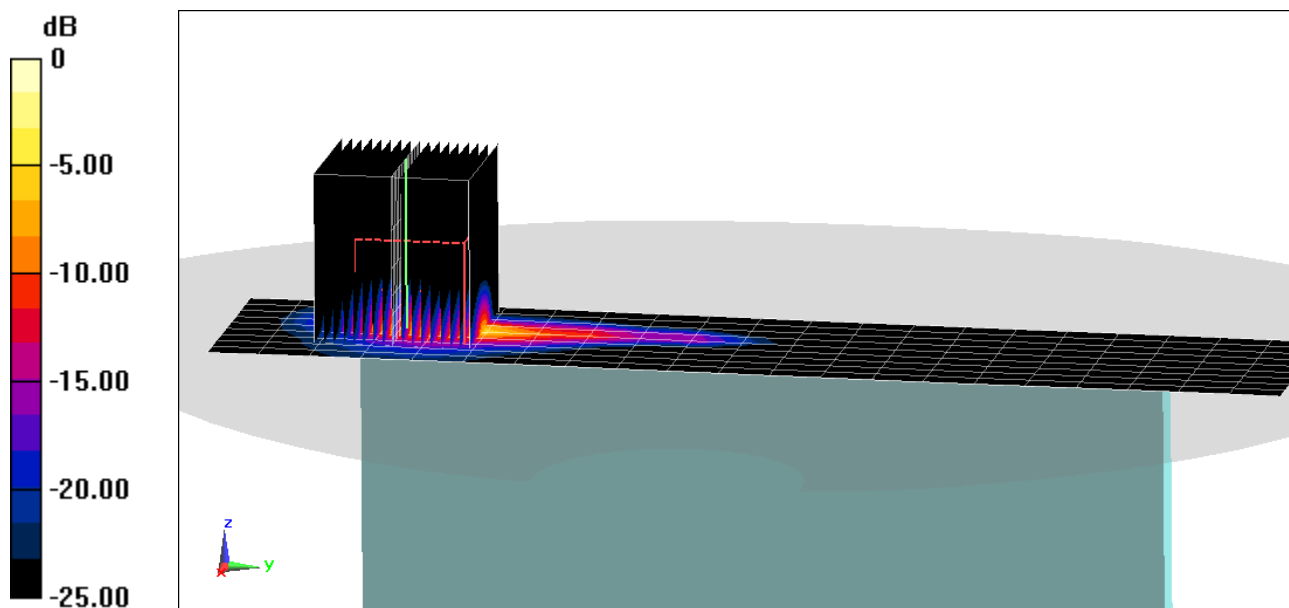

0 dB = 26.5 W/kg = 14.23 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 41.208$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/08/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 1.65 W/kg

Deviation(1 g) = -4.40%

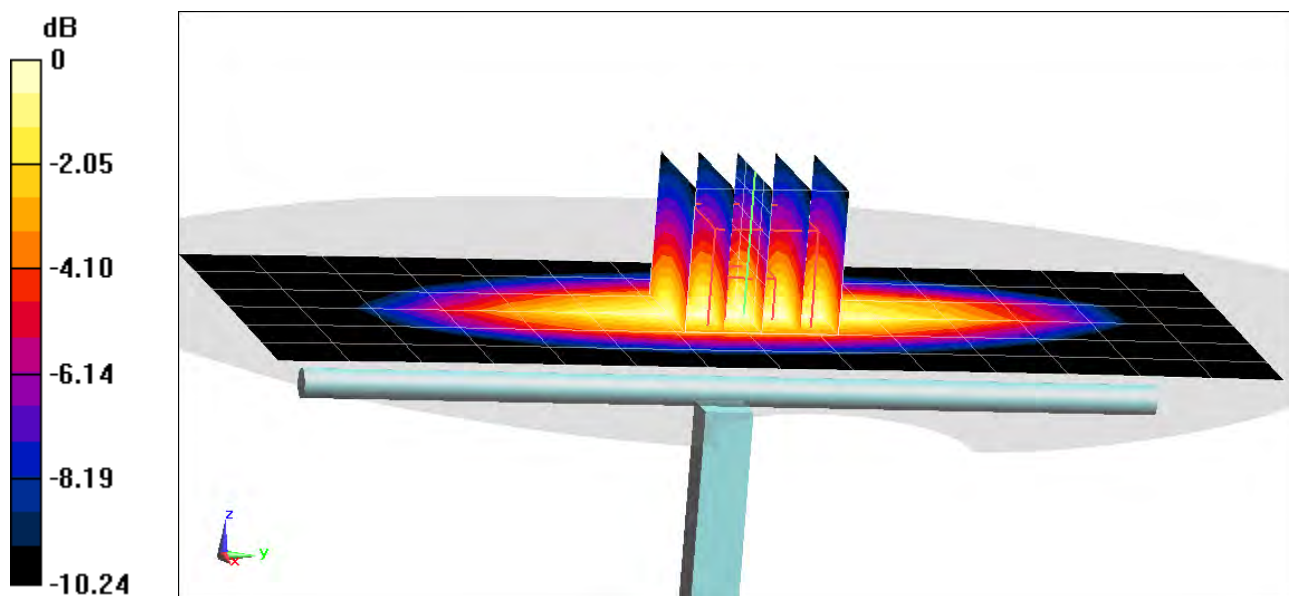

0 dB = 2.16 W/kg = 3.34 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.919 \text{ S/m}$; $\epsilon_r = 42.068$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/18/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 1.94 W/kg

Deviation(1 g) = 0.52%

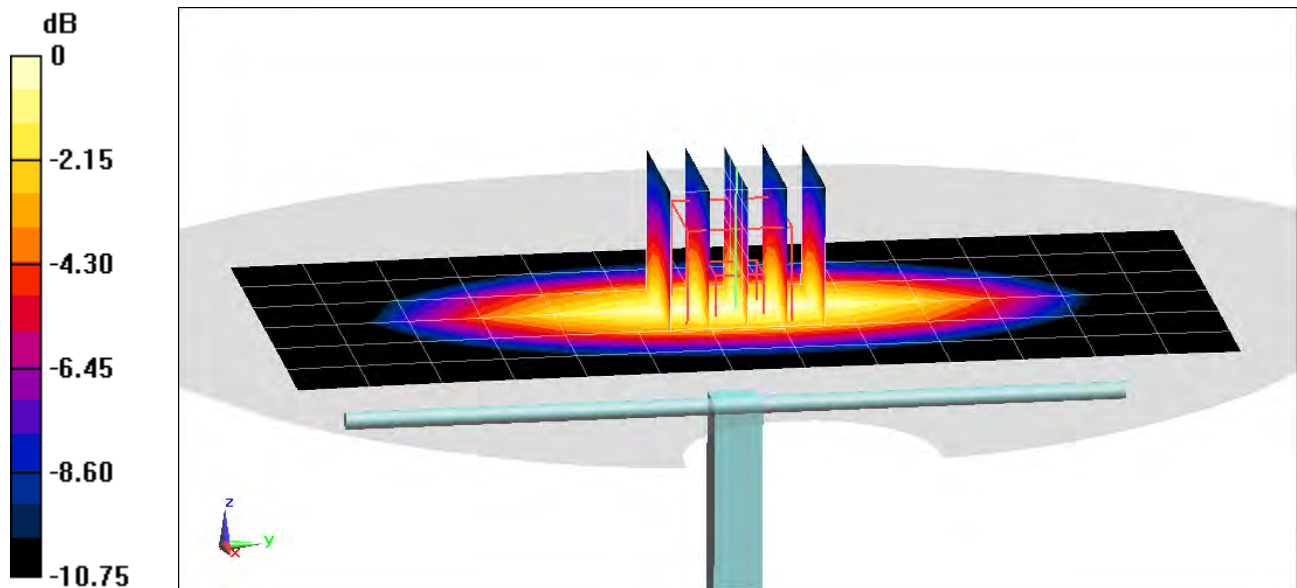

0 dB = 2.62 W/kg = 4.18 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 42.172$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/26/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 1.98 W/kg

Deviation(1 g) = 2.59%

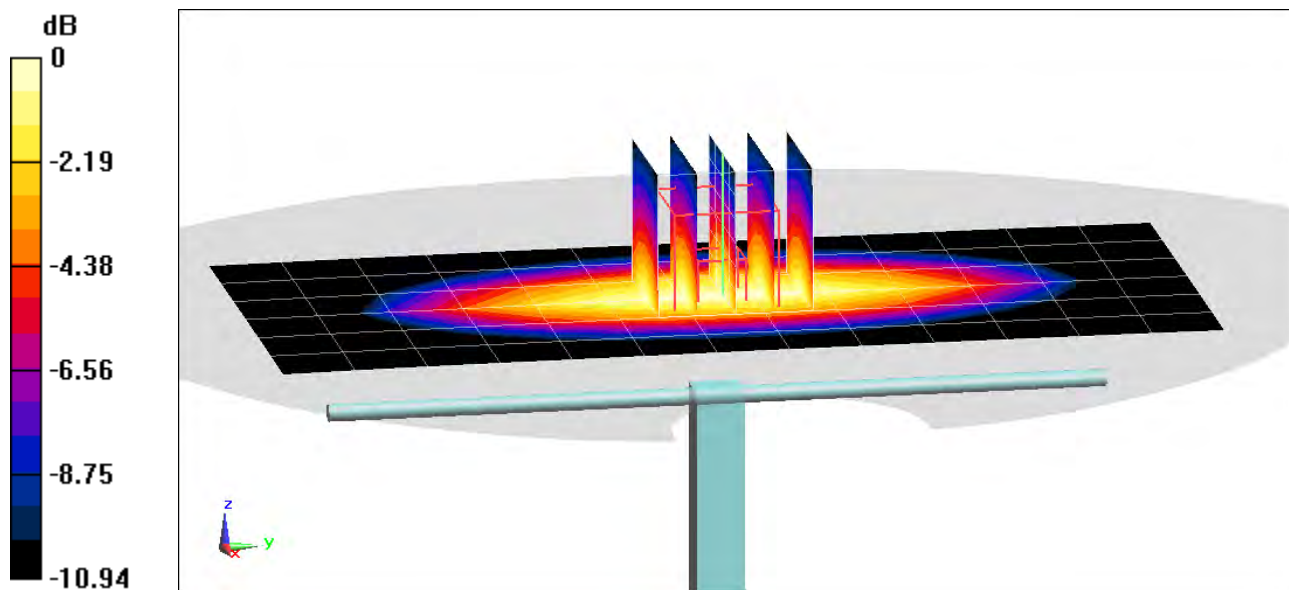

0 dB = 2.67 W/kg = 4.27 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.119$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/01/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.84 W/kg

Deviation(1 g) = -4.66%

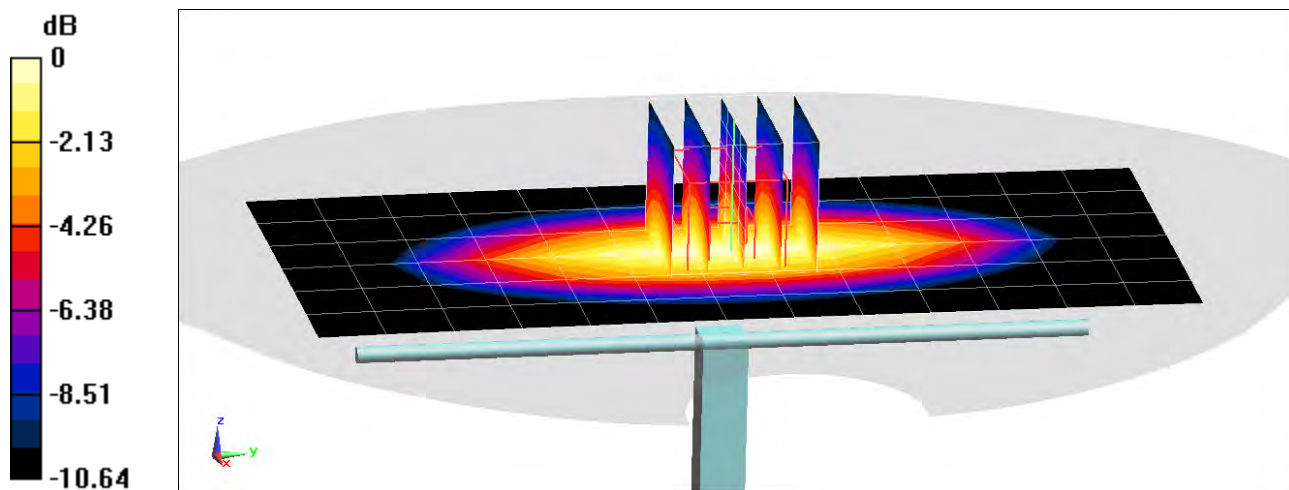

0 dB = 2.47 W/kg = 3.93 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.365 \text{ S/m}$; $\epsilon_r = 39.488$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7551; ConvF(8.34, 8.34, 8.34) @ 1750 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.41 W/kg

SAR(1 g) = 3.89 W/kg

Deviation(1 g) = 6.58%

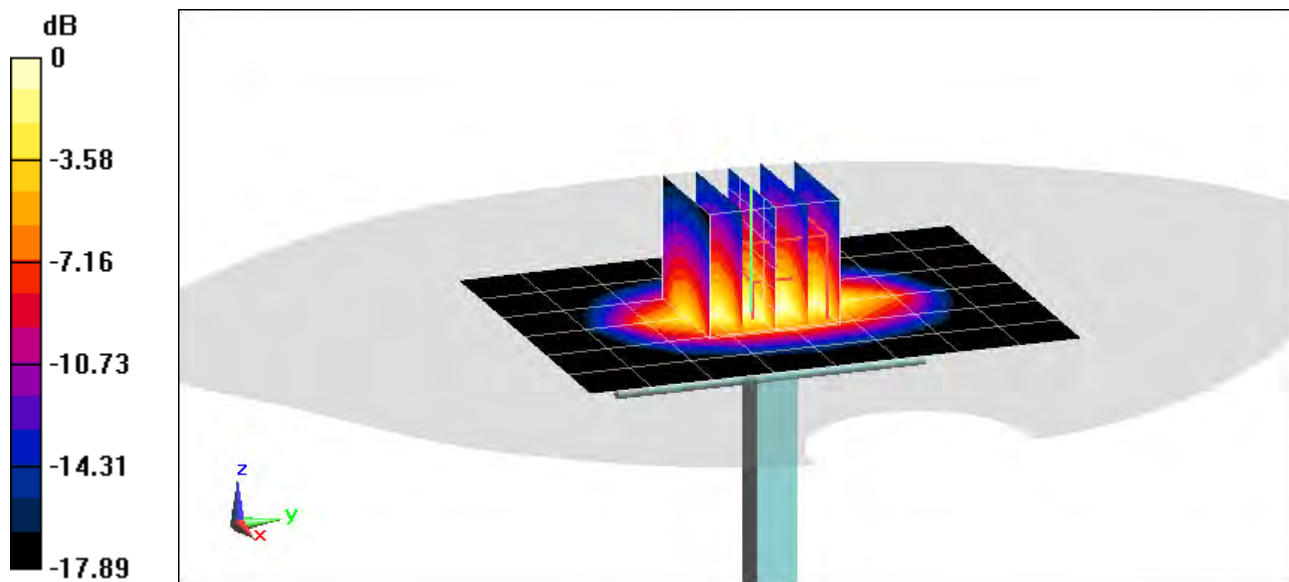

0 dB = 6.03 W/kg = 7.80 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 40.242$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/18/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7410; ConvF(8.11, 8.11, 8.11) @ 1900 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.91 W/kg

SAR(1 g) = 4.26 W/kg

Deviation(1 g) = 8.95%

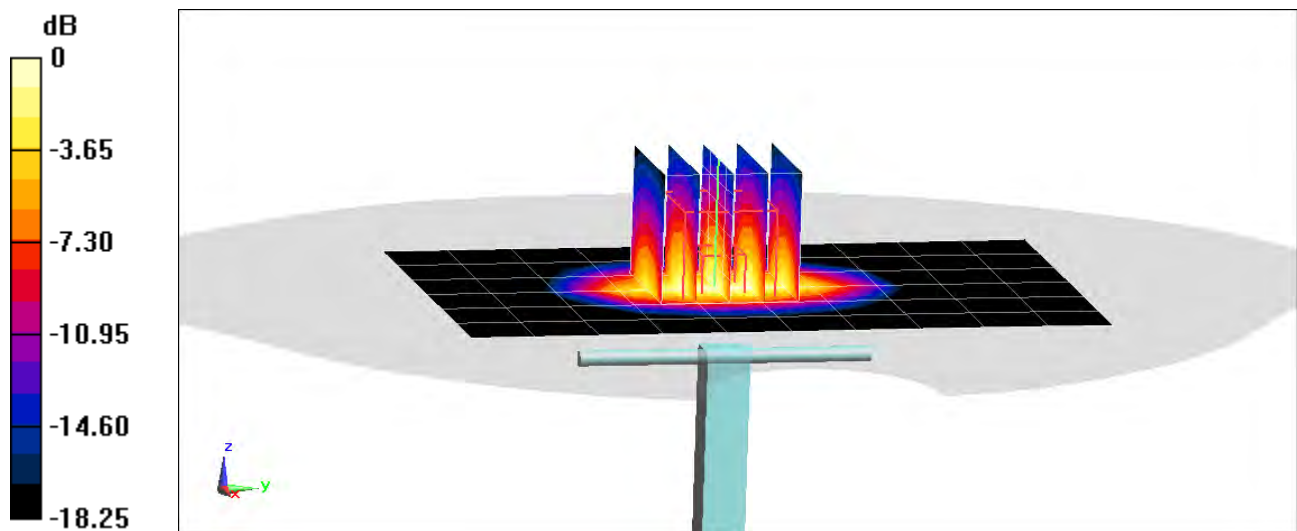

0 dB = 6.65 W/kg = 8.23 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 39.063$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/01/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1900 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.76 W/kg

SAR(1 g) = 4.07 W/kg

Deviation(1 g) = 4.09%

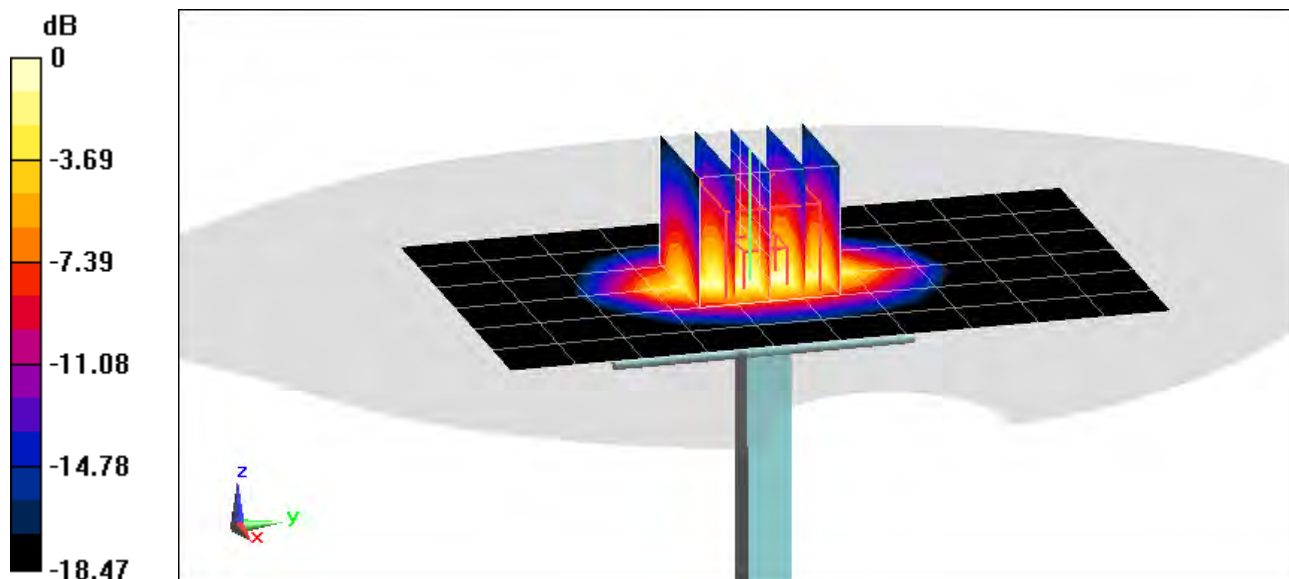

0 dB = 6.43 W/kg = 8.08 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.444 \text{ S/m}$; $\epsilon_r = 39.743$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/03/2020; Ambient Temp: 23.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1900 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.92 W/kg

SAR(1 g) = 4.14 W/kg

Deviation(1 g) = 5.88%

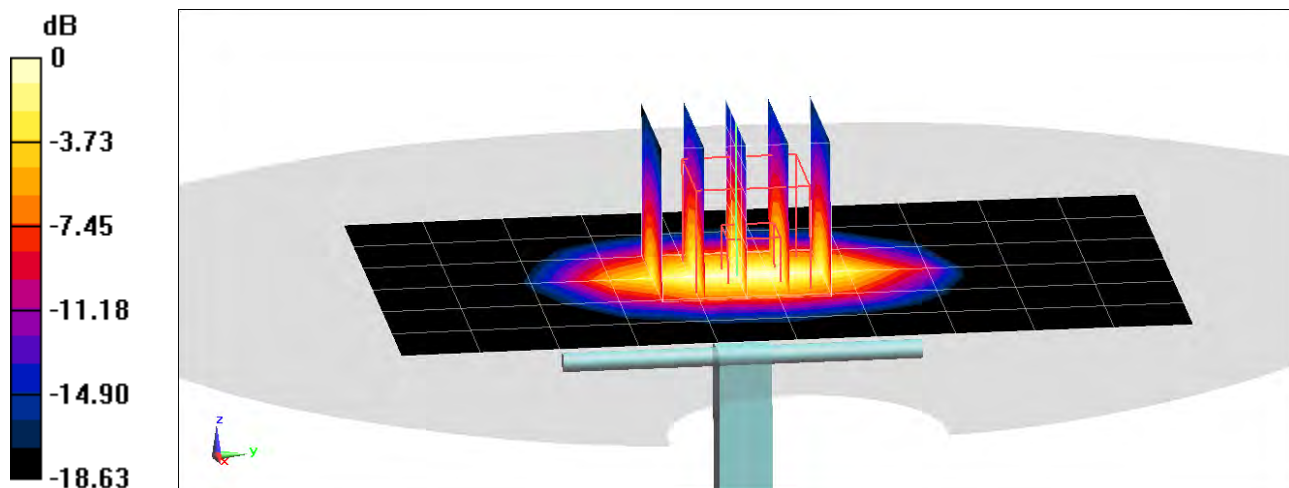

PCTEST

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1073

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.671 \text{ S/m}$; $\epsilon_r = 40.381$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/05/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3589; ConvF(7.11, 7.11, 7.11) @ 2300 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2300 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 9.85 W/kg

SAR(1 g) = 4.8 W/kg

Deviation(1 g) = -2.44%

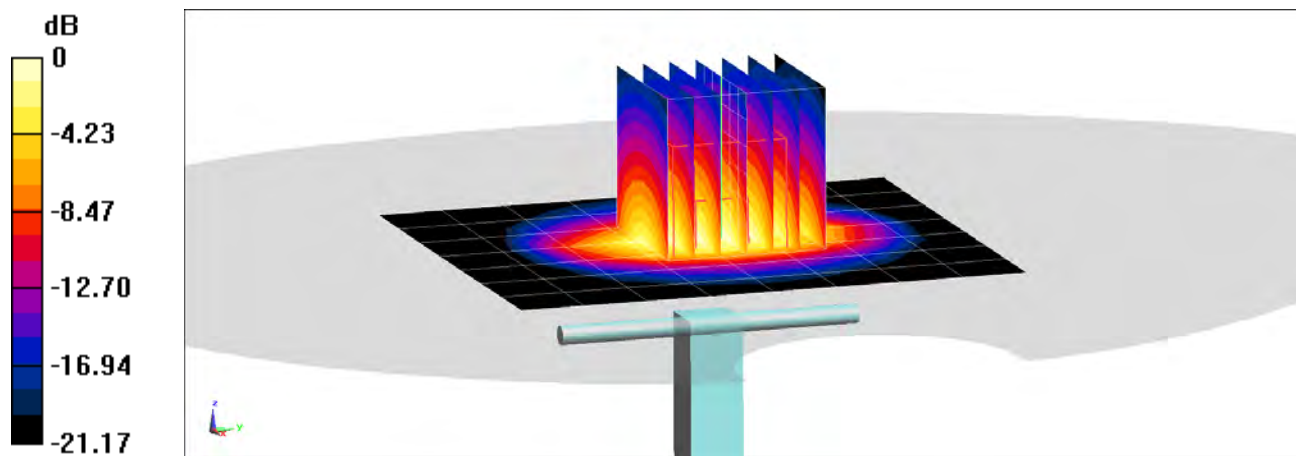

0 dB = 7.87 W/kg = 8.96 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.791 \text{ S/m}$; $\epsilon_r = 40.085$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/19/2020; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7410; ConvF(7.47, 7.47, 7.47) @ 2450 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.33 W/kg

Deviation(1 g) = 1.91%

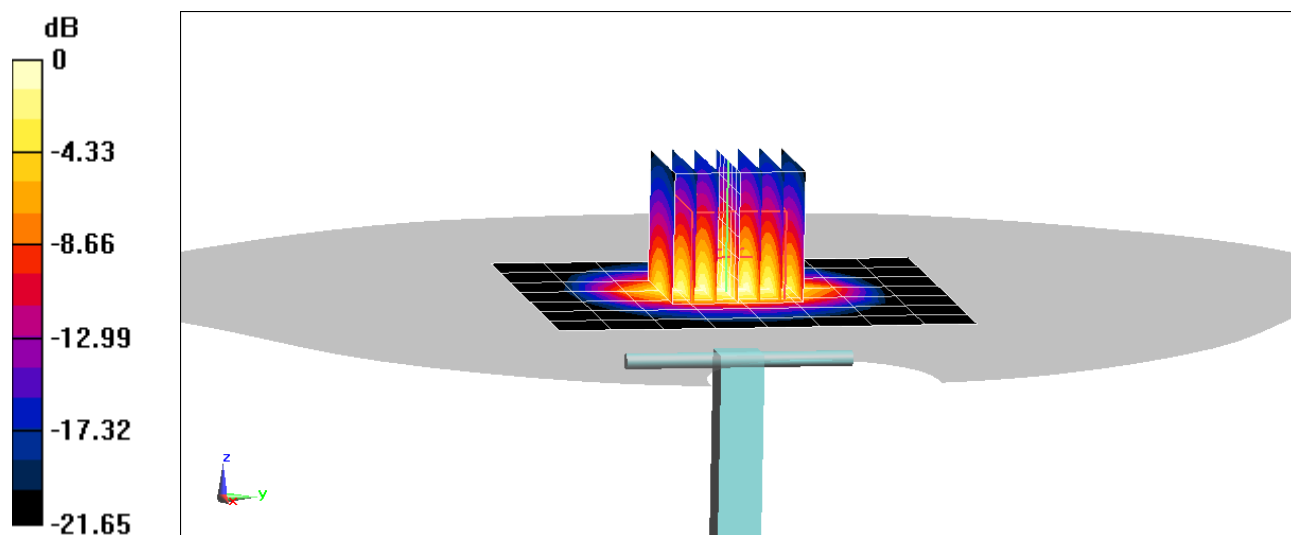

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.821 \text{ S/m}$; $\epsilon_r = 41.109$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/28/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2450 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.34 W/kg

Deviation(1 g) = 0.56%

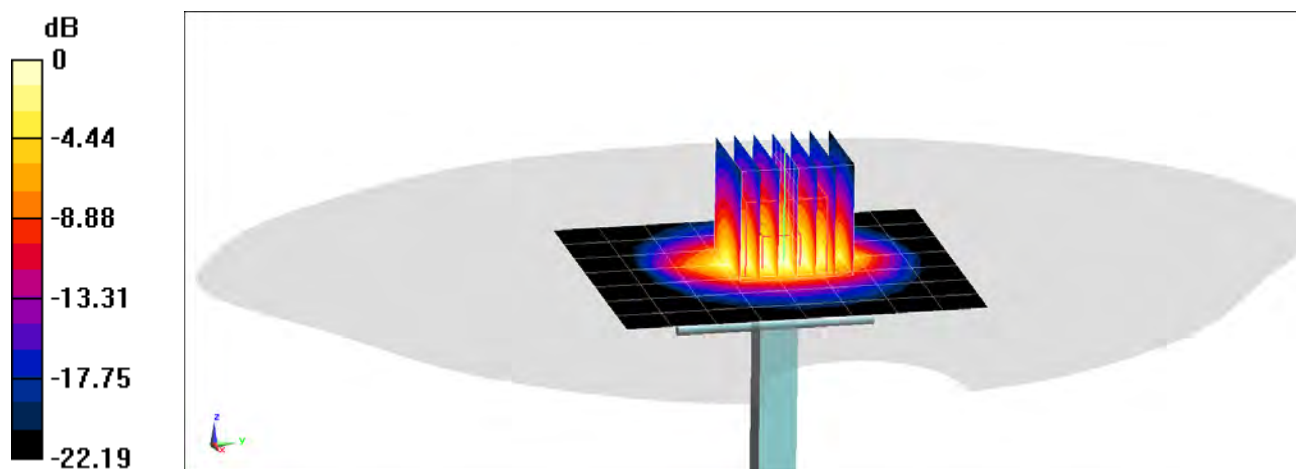

0 dB = 8.95 W/kg = 9.52 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 40.473$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/31/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2600 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.81 W/kg

Deviation(1 g) = 0.00%

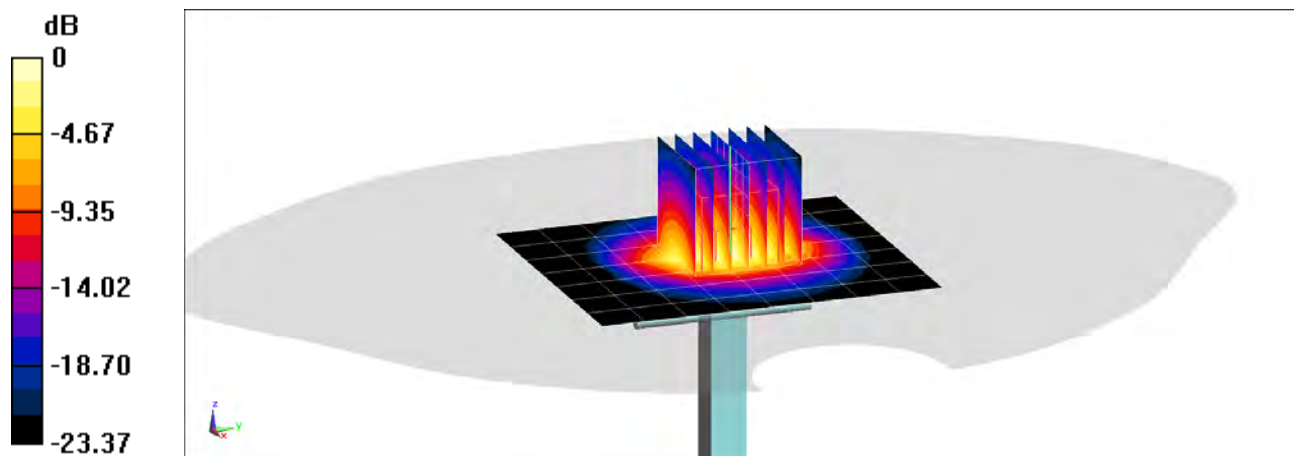

0 dB = 9.95 W/kg = 9.98 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 1.908 \text{ S/m}$; $\epsilon_r = 39.842$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/03/2020; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2600 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.54 W/kg

Deviation(1 g) = -4.65%

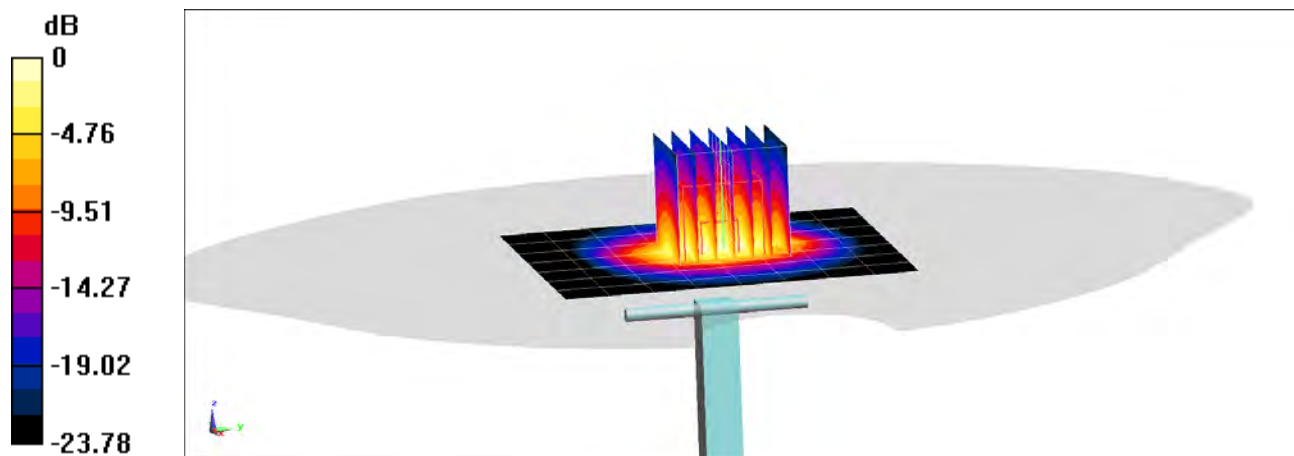

0 dB = 9.63 W/kg = 9.84 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.969$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/10/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2600 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 5.68 W/kg

Deviation(1 g) = -2.24%

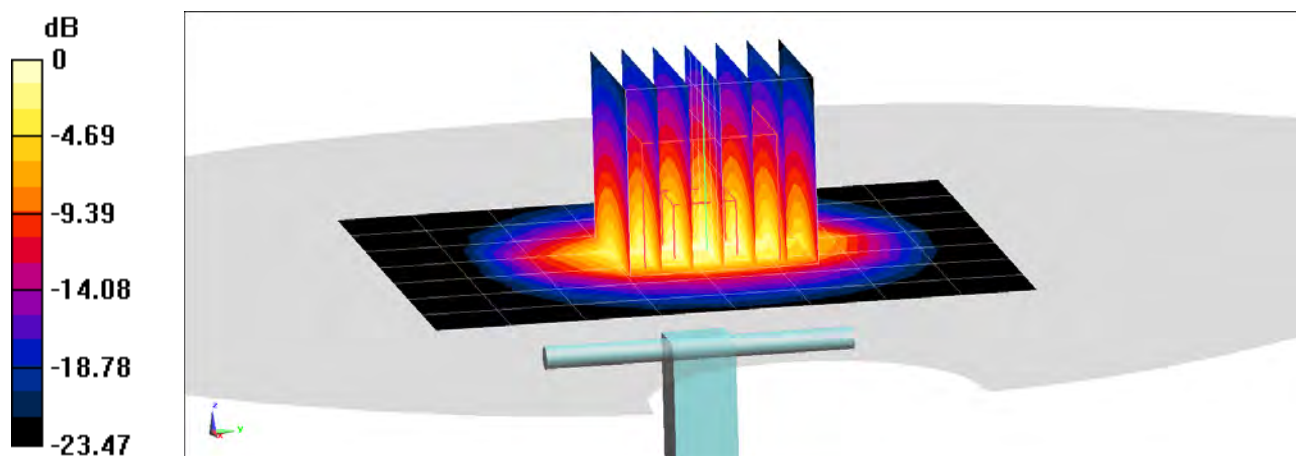

0 dB = 9.79 W/kg = 9.91 dBW/kg

PCTEST

DUT: Dipole 3500 MHz; Type: D3500V2; Serial: 1059

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: 3600 Head Medium parameters used:

$f = 3500$ MHz; $\sigma = 2.848$ S/m; $\epsilon_r = 38.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/30/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7488; ConvF(7.3, 7.3, 7.3) @ 3500 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 left 20; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

3500 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 6.2 W/kg

Deviation(1 g) = -4.02%

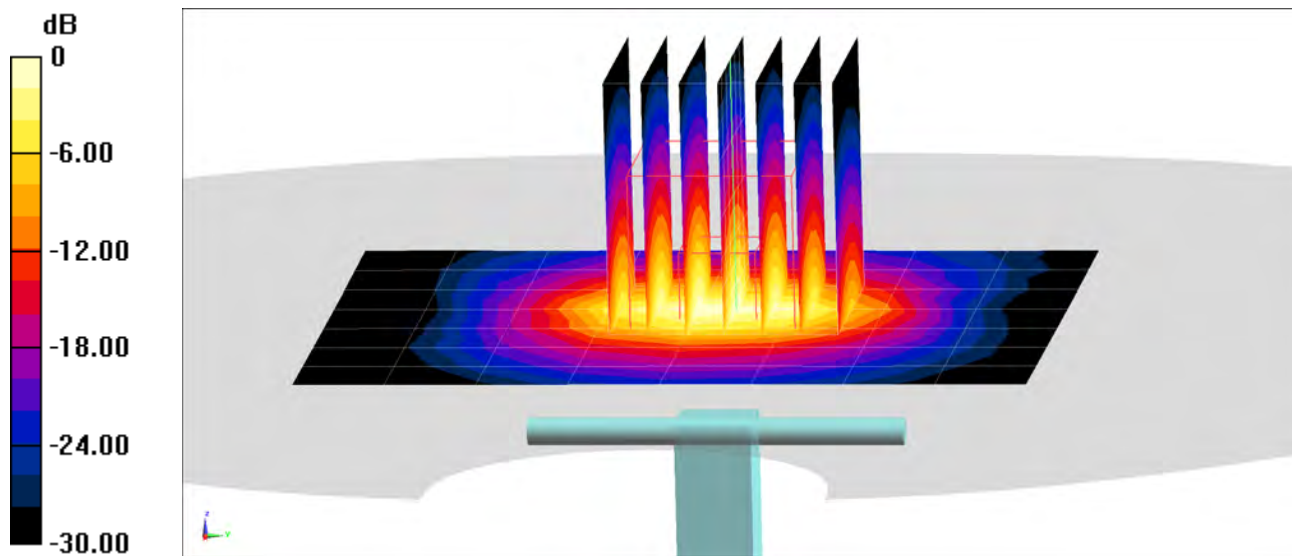

0 dB = 12.0 W/kg = 10.79 dBW/kg

PCTEST

DUT: Dipole 3700 MHz; Type: D3700V2; Serial: 1018

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: 3600 Head Medium parameters used:

$f = 3700 \text{ MHz}$; $\sigma = 3.01 \text{ S/m}$; $\epsilon_r = 38.571$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/30/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7488; ConvF(7.2, 7.2, 7.2) @ 3700 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 left 20; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

3700 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 6.16 W/kg

Deviation(1 g) = -6.38%

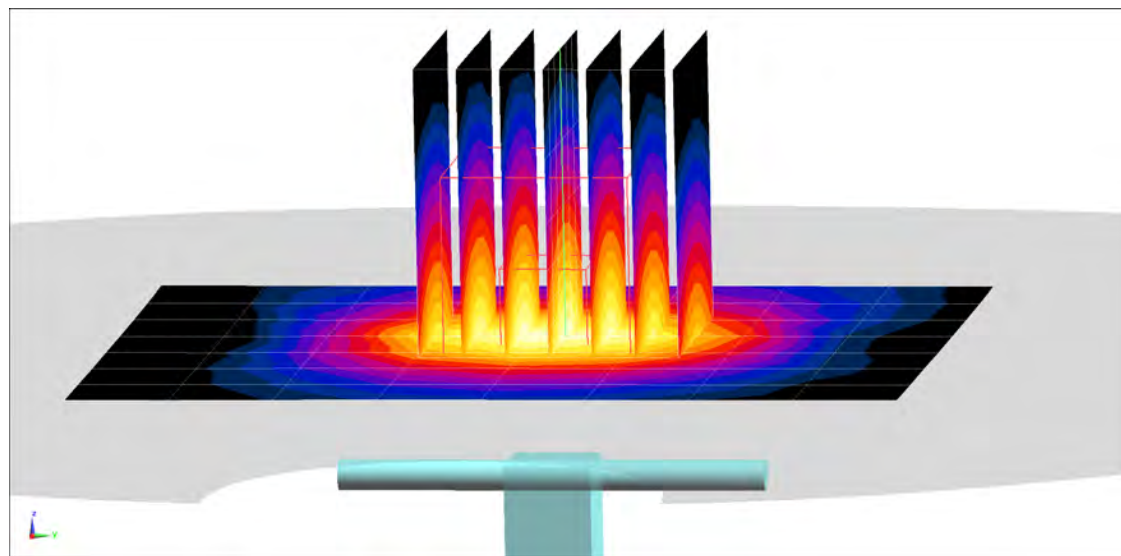

0 dB = 12.3 W/kg = 10.90 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5250$ MHz; $\sigma = 4.495$ S/m; $\epsilon_r = 36.293$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/29/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7357; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.5 W/kg

SAR(1 g) = 3.71 W/kg

Deviation(1 g) = -6.31%

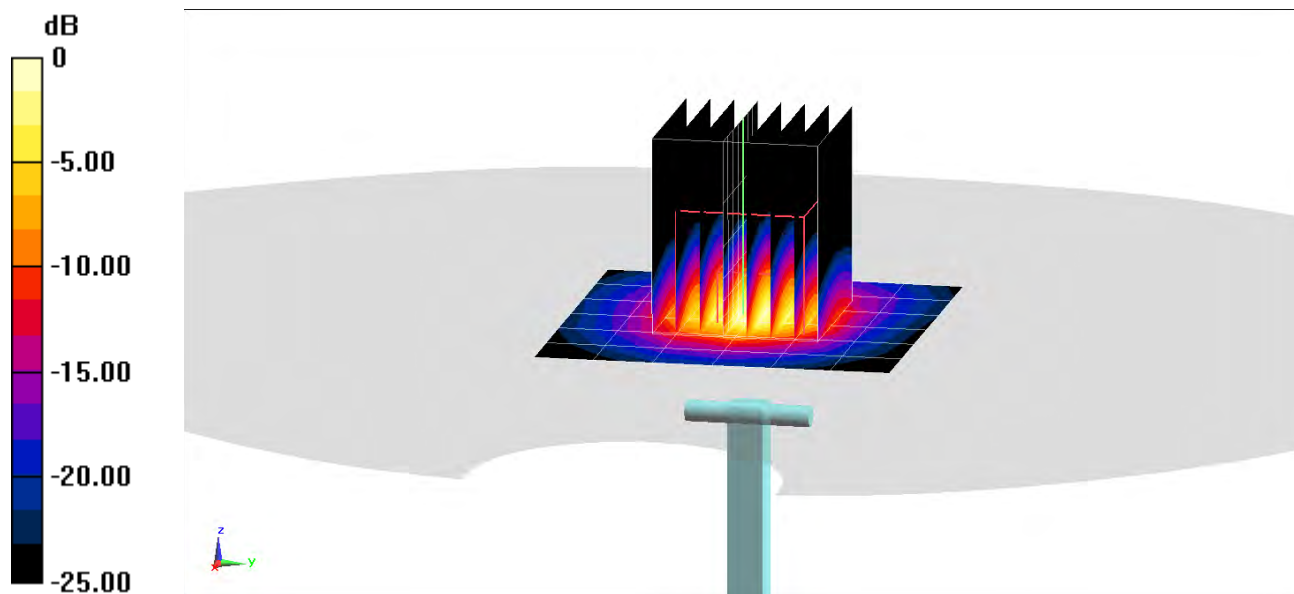

0 dB = 8.83 W/kg = 9.46 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.882 \text{ S/m}$; $\epsilon_r = 35.69$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/29/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93) @ 5600 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.98 W/kg

Deviation(1 g) = -5.35%

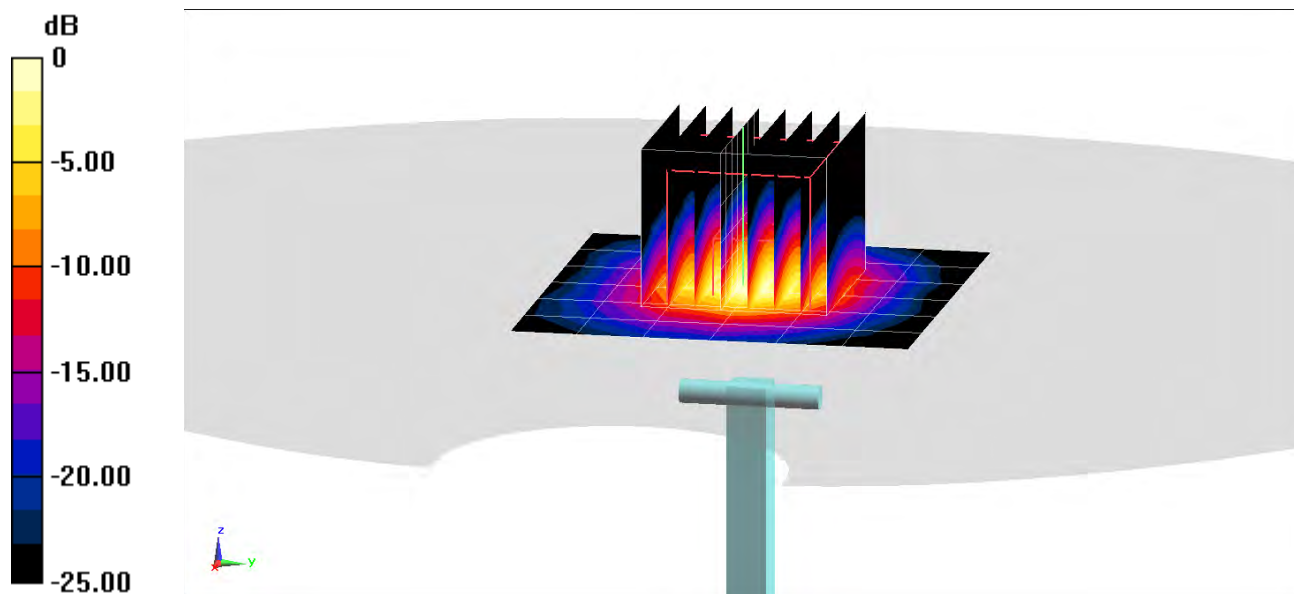

0 dB = 9.44 W/kg = 9.75 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5750$ MHz; $\sigma = 5.052$ S/m; $\epsilon_r = 35.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/29/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7357; ConvF(5.05, 5.05, 5.05) @ 5750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.83 W/kg

Deviation(1 g) = -4.84%

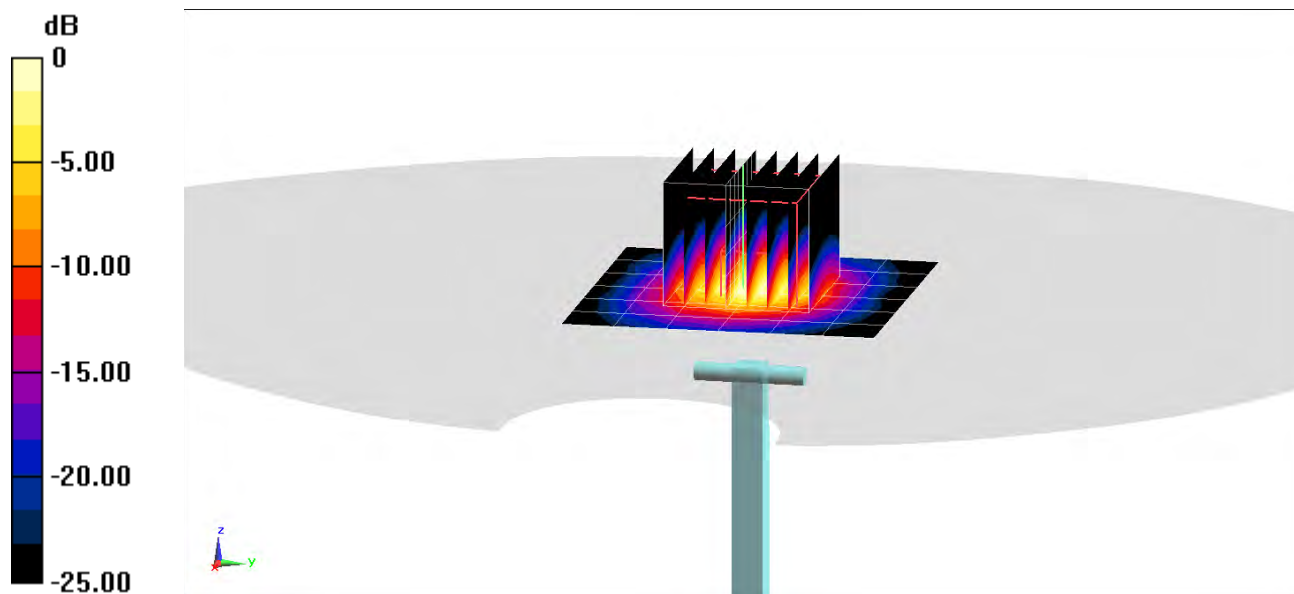

0 dB = 9.34 W/kg = 9.70 dBW/kg

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 53.65$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/20/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.59 W/kg

Deviation(1 g) = -6.80%

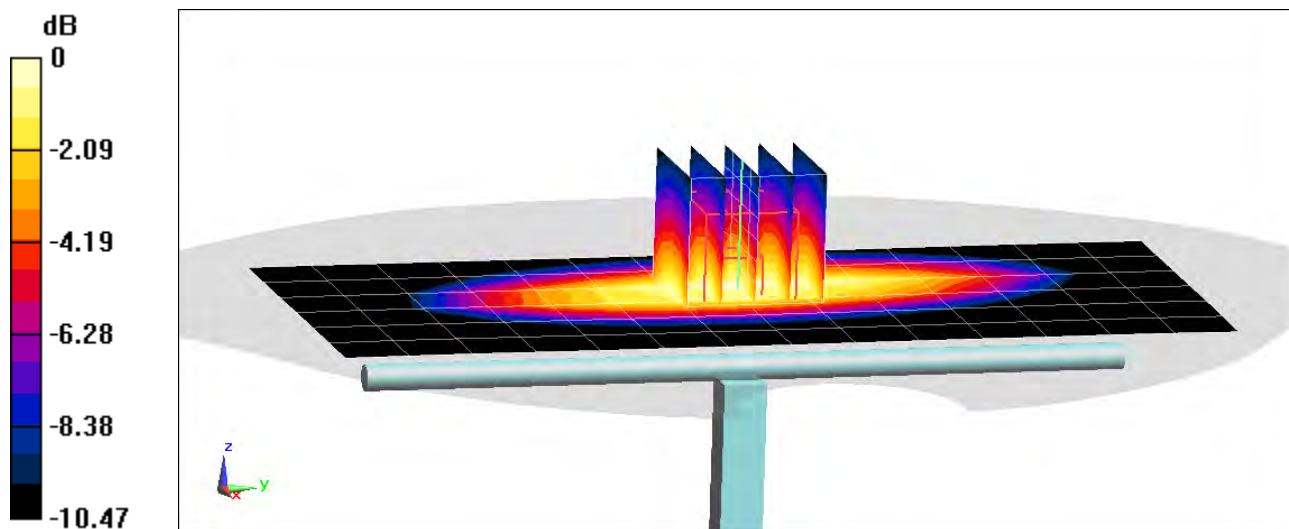

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.957 \text{ S/m}$; $\epsilon_r = 54.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/27/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 1.71 W/kg

Deviation(1 g) = 0.23%

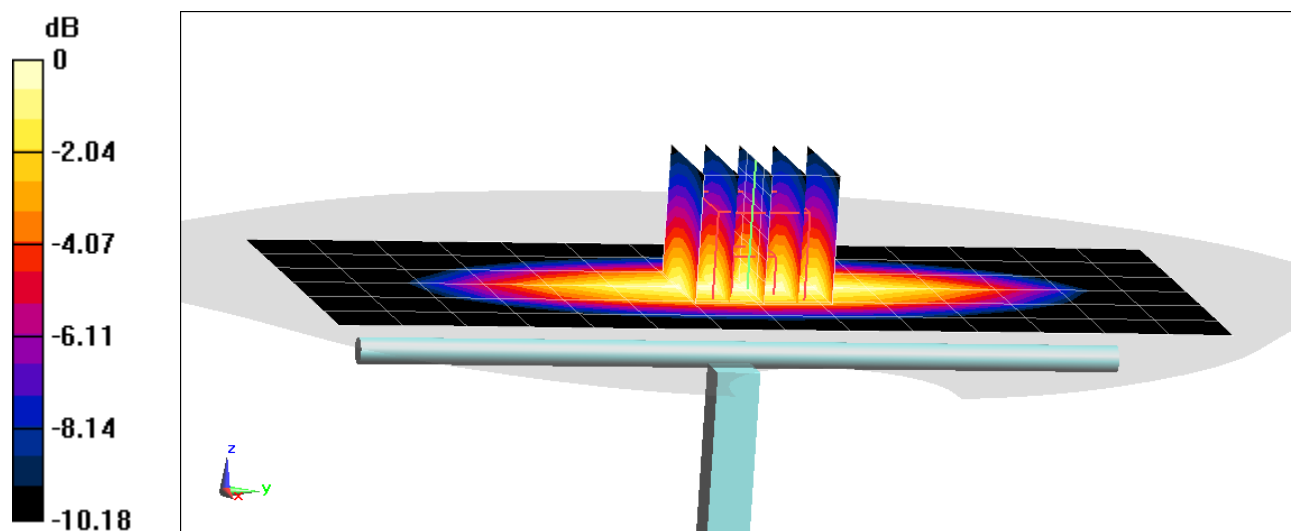

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 53.583$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/14/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 835 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 2.01 W/kg

Deviation(1 g) = 6.12%

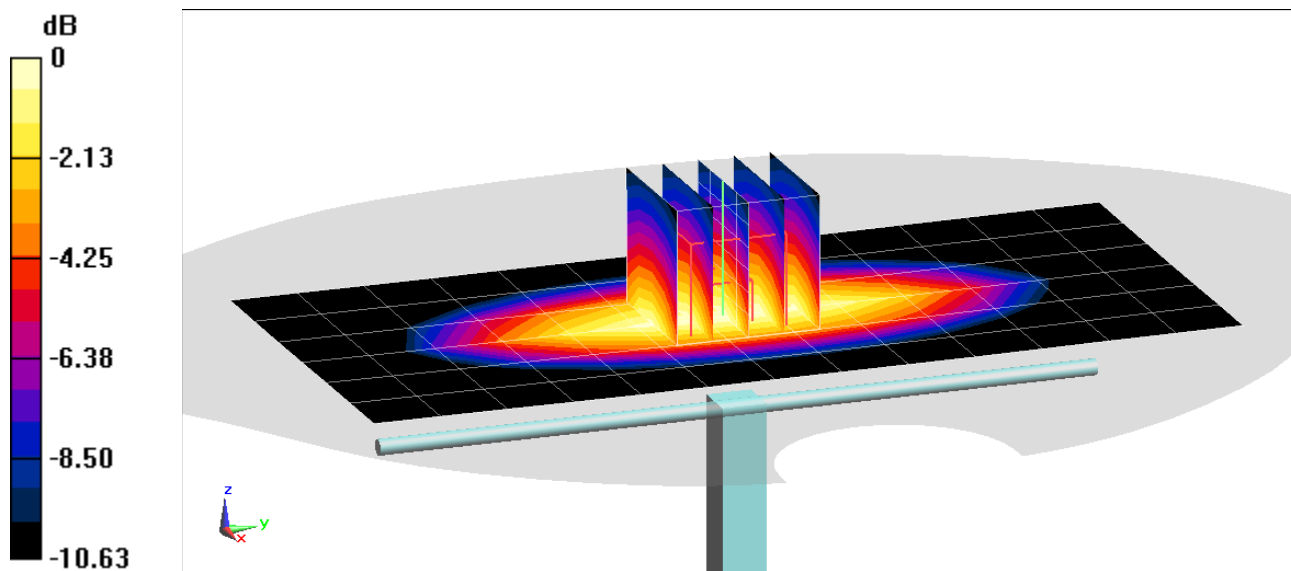

0 dB = 2.69 W/kg = 4.30 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 53.076$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/17/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)



Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 2.02 W/kg

Deviation(1 g) = 6.65%

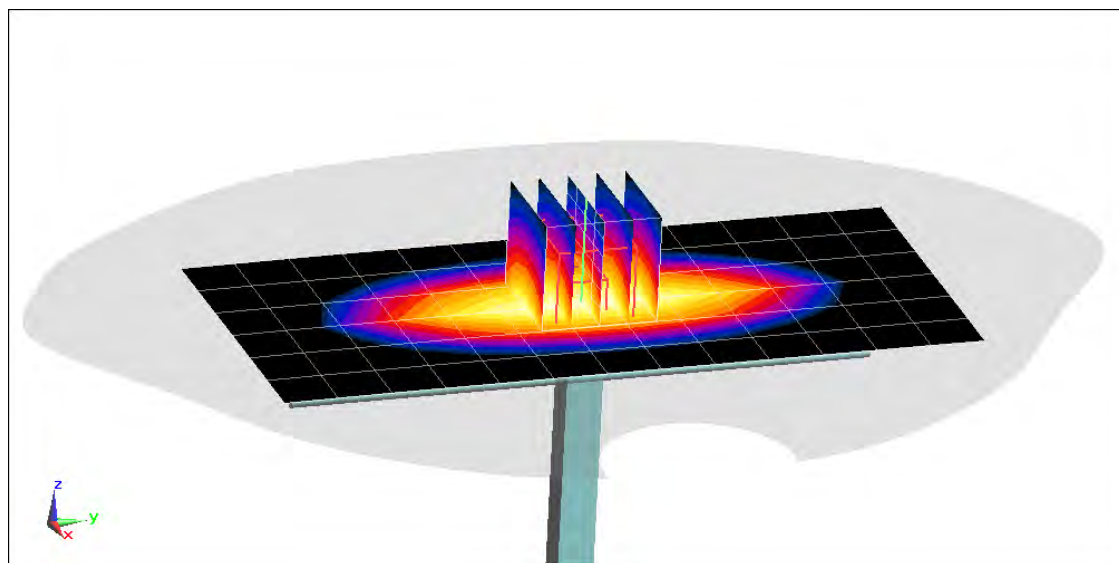

0 dB = 2.72 W/kg = 4.35 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.965 \text{ S/m}$; $\epsilon_r = 54.112$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/24/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 1.94 W/kg

Deviation(1 g) = -0.51%

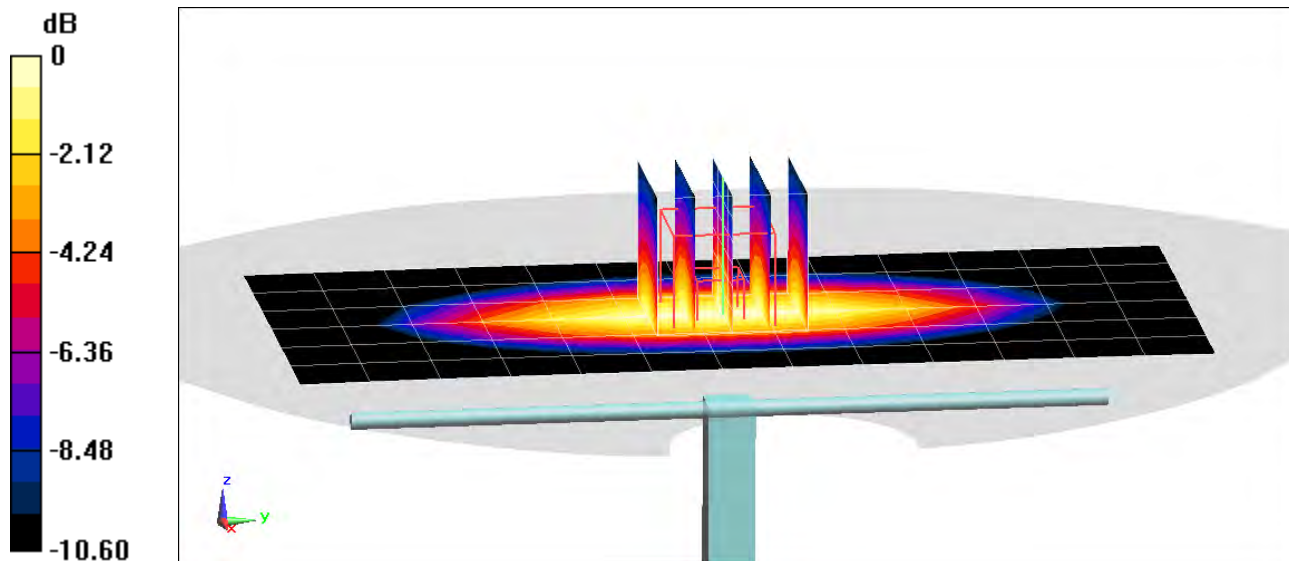

0 dB = 2.63 W/kg = 4.20 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 53.653$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06/29/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 2.01 W/kg

Deviation(1 g) = 0.90%

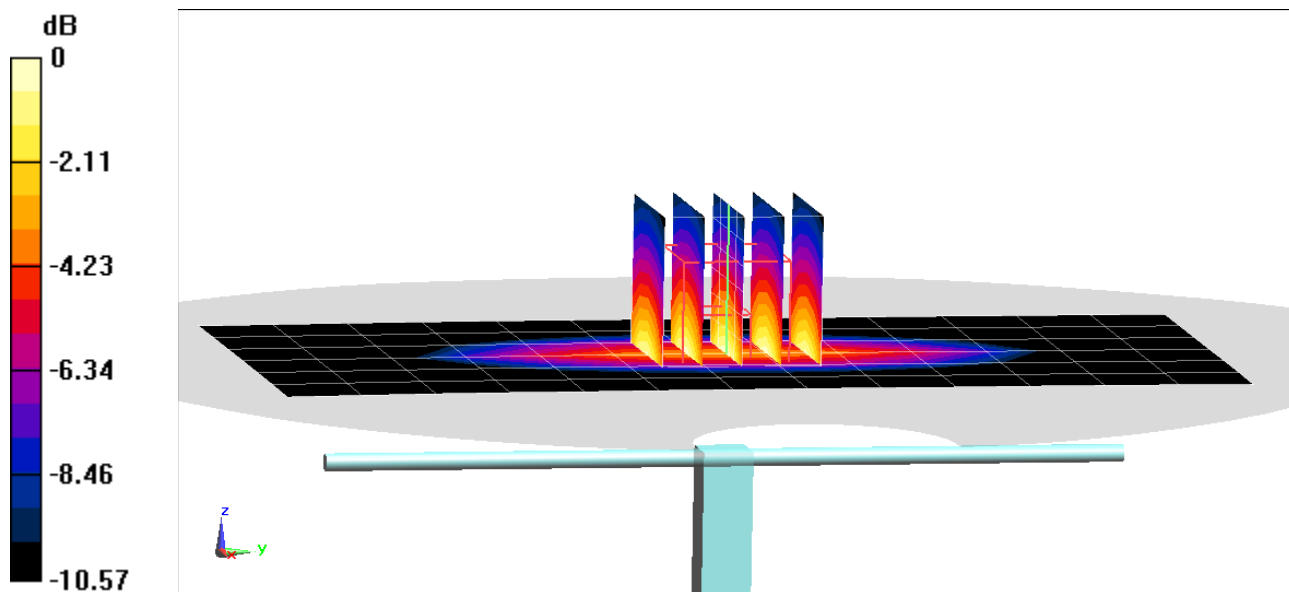

0 dB = 2.70 W/kg = 4.31 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.53 \text{ S/m}$; $\epsilon_r = 52.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/08/2020; Ambient Temp: 21.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1750 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.10 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.02 W/kg

Deviation(1 g) = 2.94%; Deviation(10 g) = 1.51%

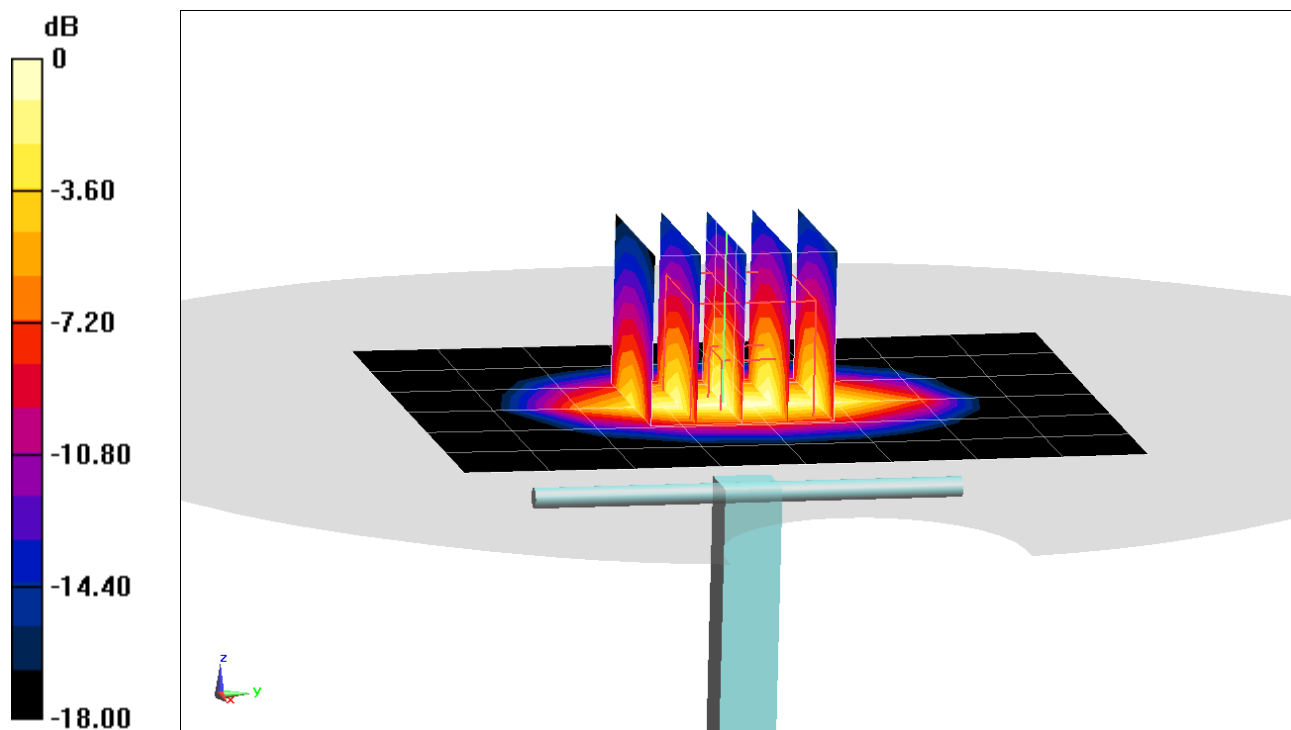

0 dB = 5.88 W/kg = 7.69 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.53 \text{ S/m}$; $\epsilon_r = 51.507$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/19/2020; Ambient Temp: 20.9°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1750 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.92 W/kg

SAR(1 g) = 3.78 W/kg

Deviation(1 g) = 3.28%

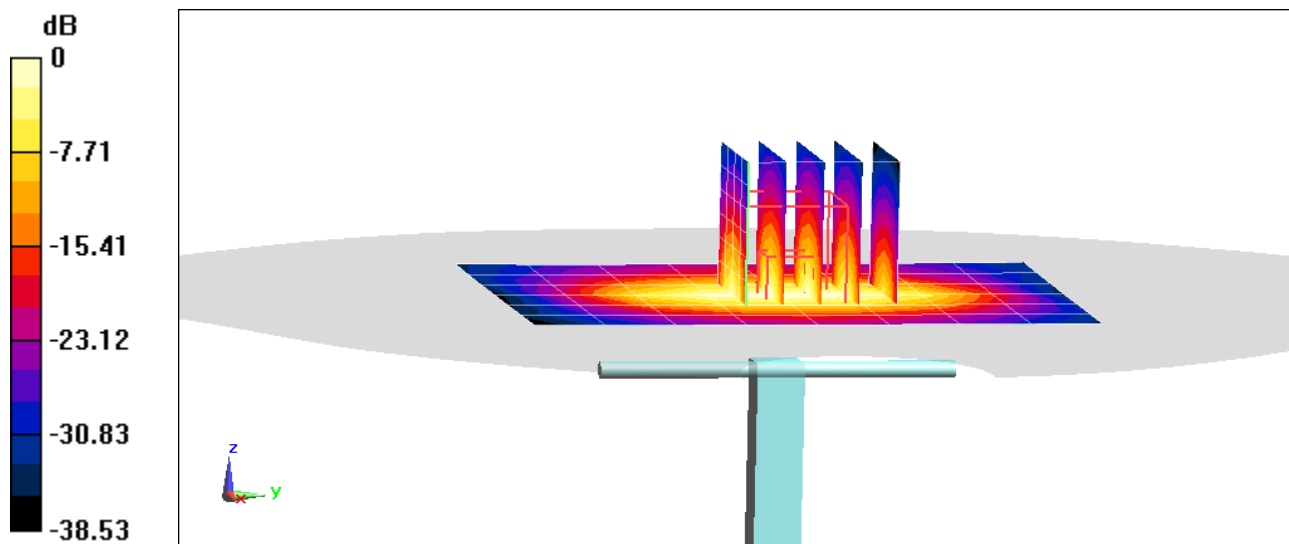

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 52.393$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/22/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 3.58 W/kg; SAR(10 g) = 1.93 W/kg

Deviation(1 g) = -2.19%; Deviation(10 g) = -0.52%

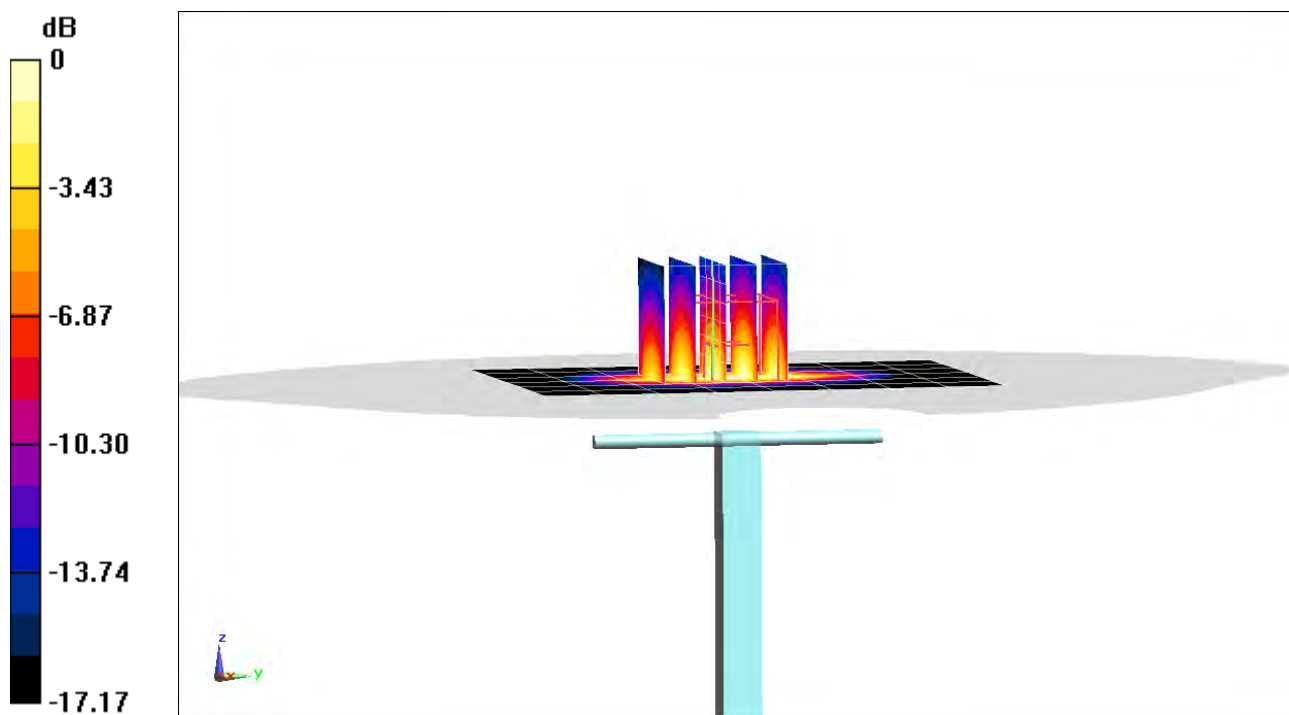

0 dB = 5.33 W/kg = 7.27 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 51.937$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 24.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.99 W/kg

SAR(1 g) = 3.91 W/kg

Deviation(1 g) = 7.71%

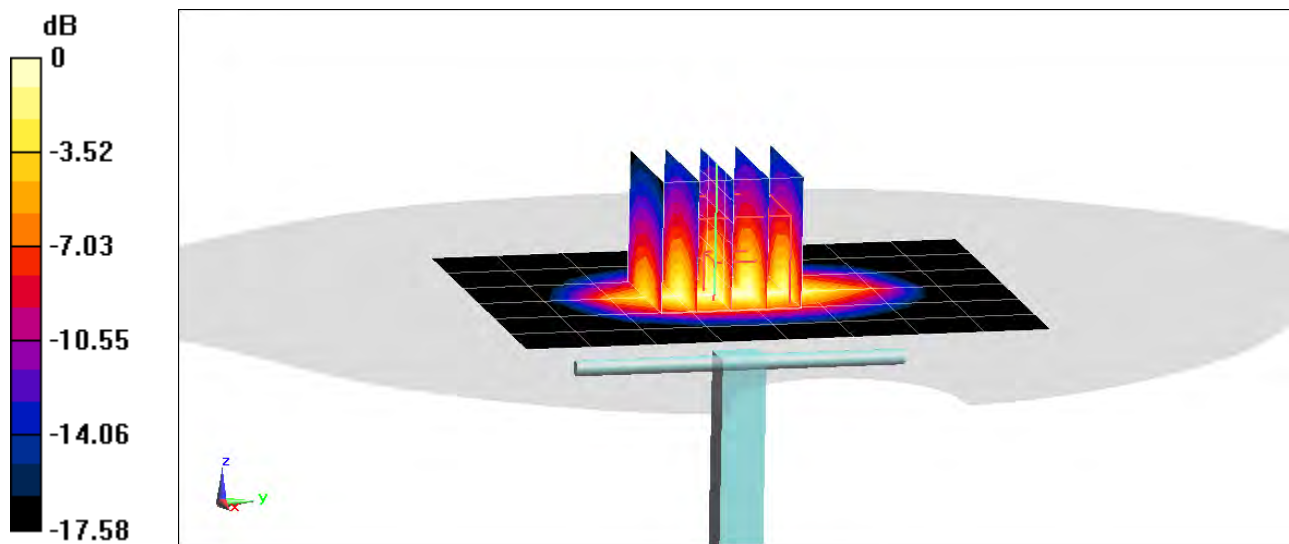

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.558 \text{ S/m}$; $\epsilon_r = 53.035$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/26/2020; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.82 W/kg

SAR(1 g) = 4.05 W/kg; SAR(10 g) = 2.05 W/kg

Deviation(1 g) = 3.32%; Deviation(10 g) = -0.49%

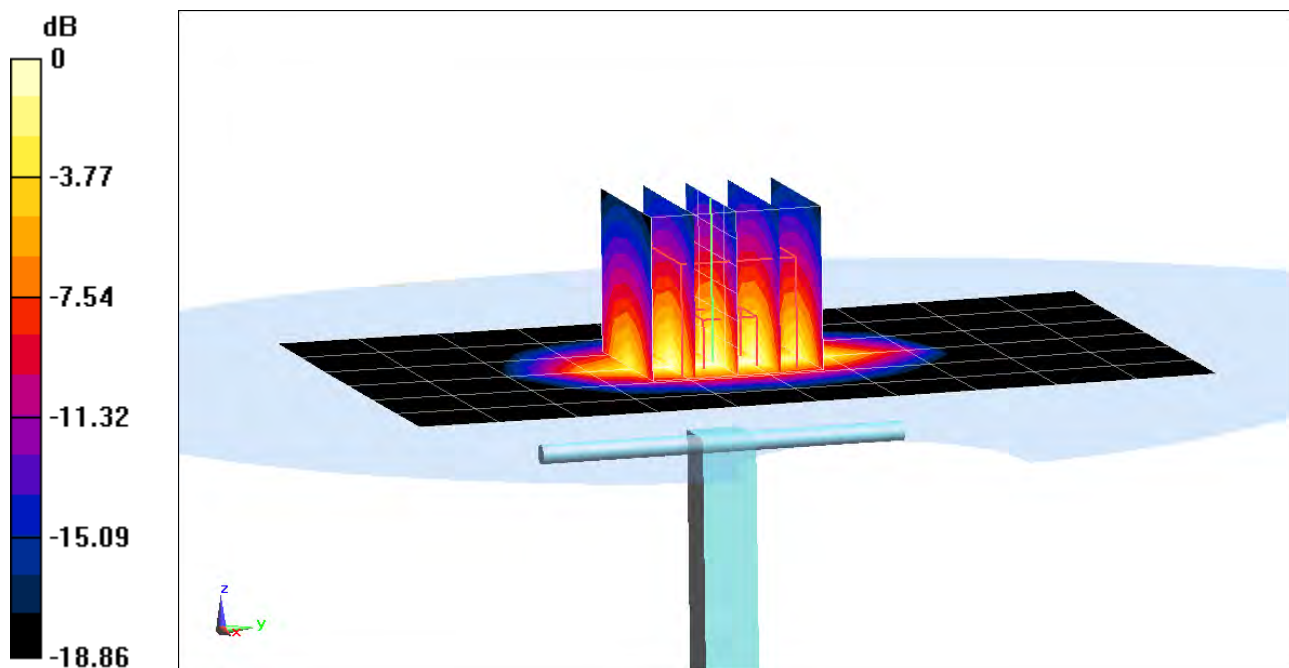

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.554 \text{ S/m}$; $\epsilon_r = 51.737$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/31/2020; Ambient Temp: 23.3°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.69 W/kg

SAR(1 g) = 4.14 W/kg; SAR(10 g) = 2.12 W/kg

Deviation(1 g) = 5.61%; Deviation(10 g) = 2.91%

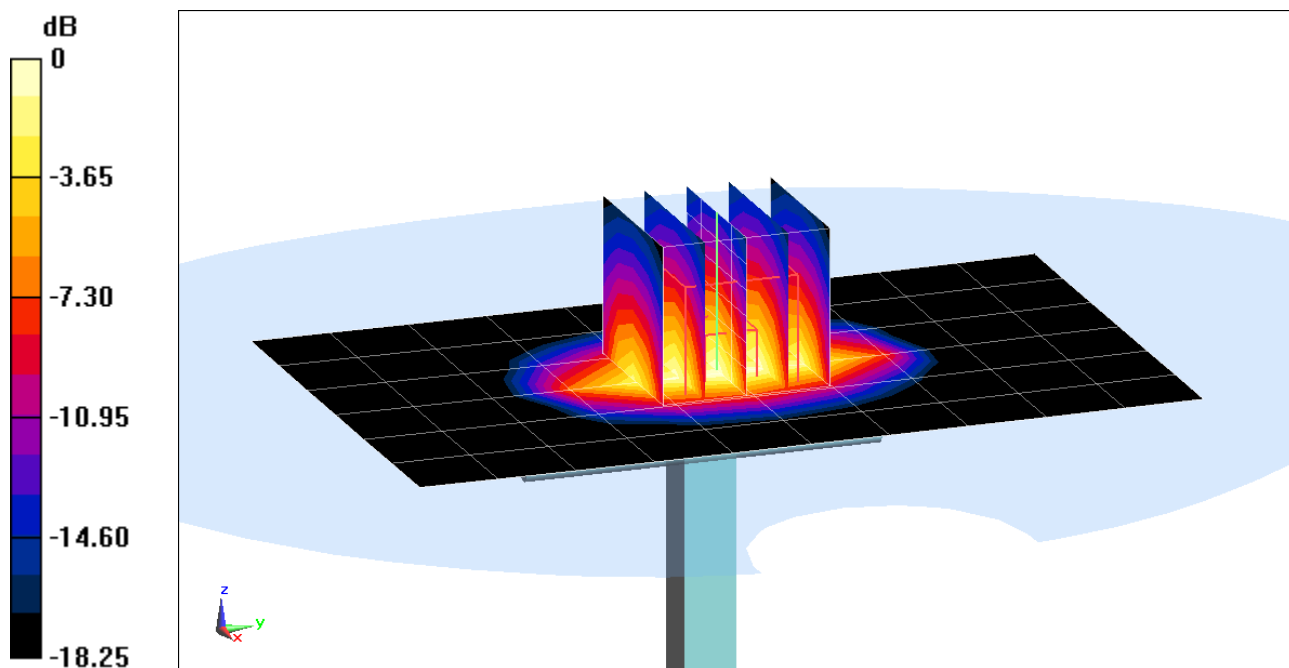

0 dB = 6.48 W/kg = 8.12 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.558 \text{ S/m}$; $\epsilon_r = 52.135$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/03/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.83 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 2.17 W/kg

Deviation(1 g) = 7.65%; Deviation(10 g) = 5.34%

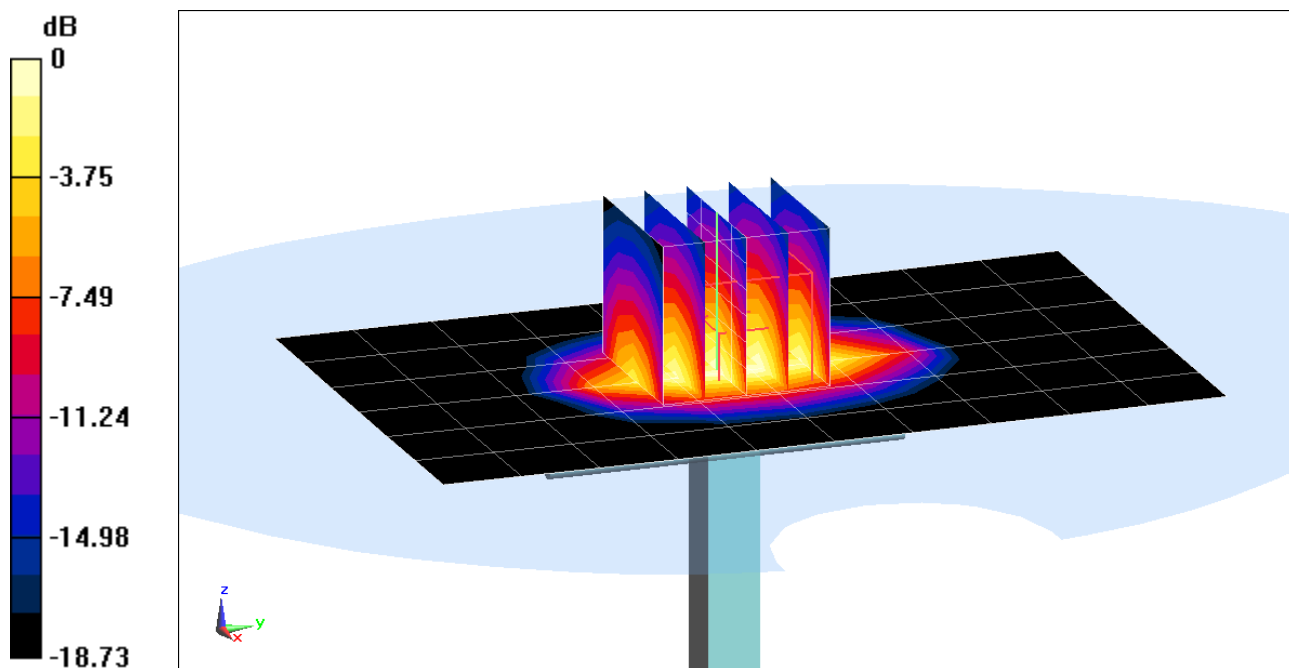

0 dB = 6.43 W/kg = 8.08 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.579 \text{ S/m}$; $\epsilon_r = 51.656$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/07/2020; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.46 W/kg

SAR(1 g) = 3.95 W/kg

Deviation(1 g) = 0.77%

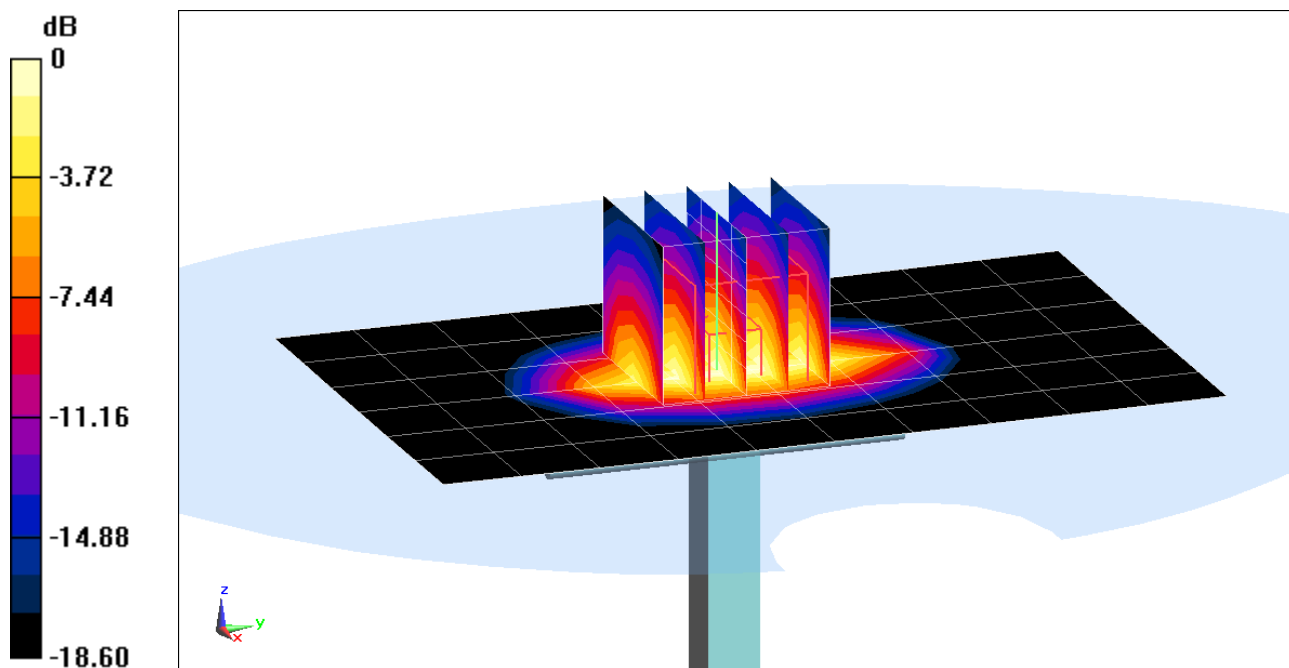

0 dB = 6.22 W/kg = 7.94 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.573 \text{ S/m}$; $\epsilon_r = 52.802$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/10/2020; Ambient Temp: 22.0°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.82 W/kg

SAR(1 g) = 4.17 W/kg

Deviation(1 g) = 6.38%

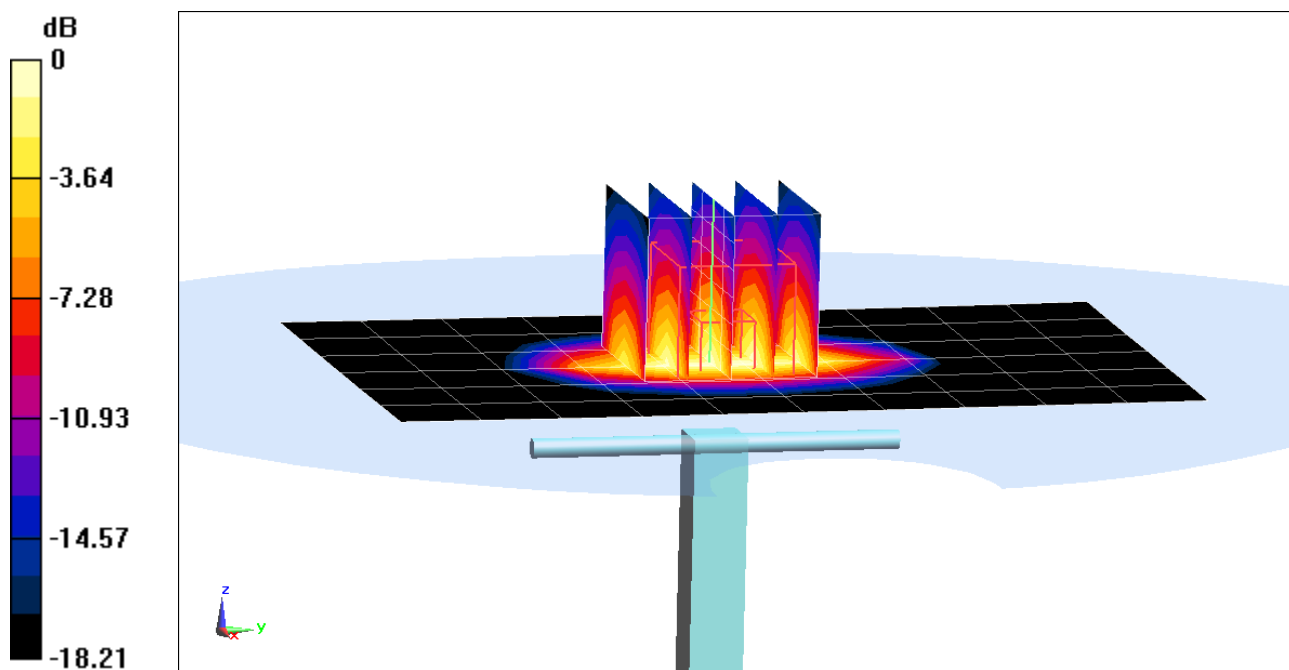

0 dB = 6.47 W/kg = 8.11 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.584 \text{ S/m}$; $\epsilon_r = 51.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/15/2020; Ambient Temp: 22.1°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.89 W/kg

SAR(1 g) = 4.26 W/kg

Deviation(1 g) = 8.67%

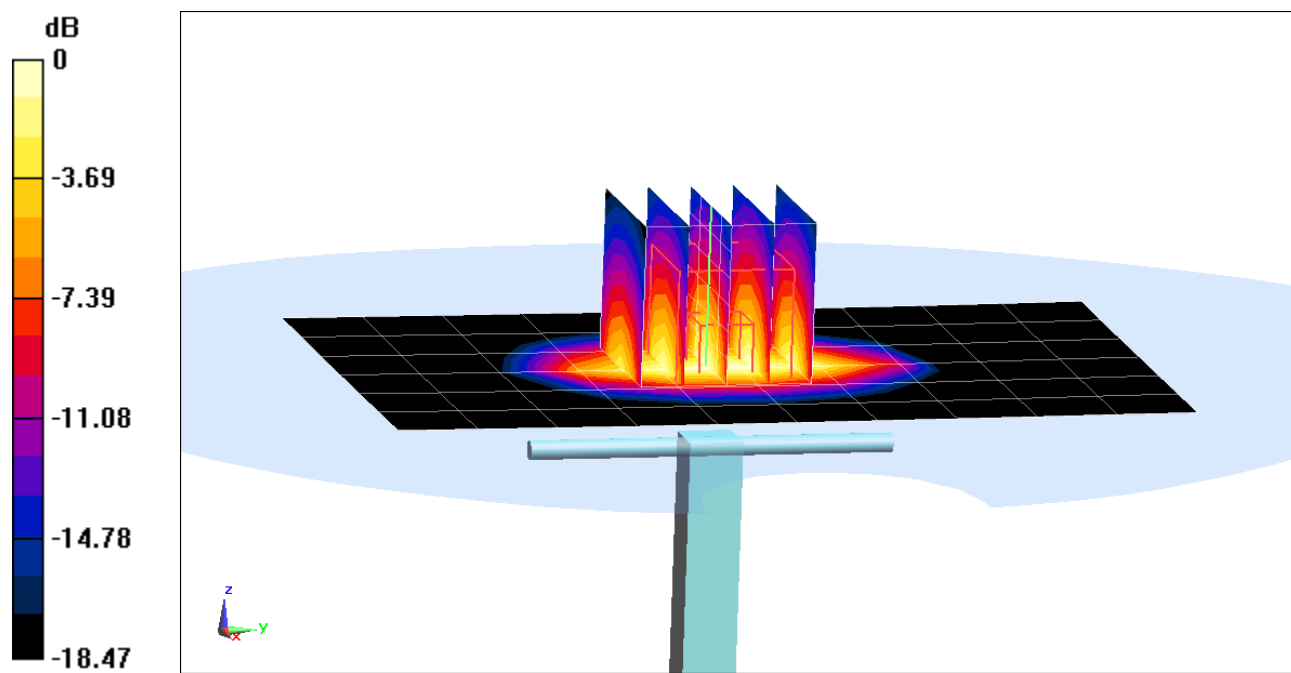

0 dB = 6.55 W/kg = 8.16 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.566 \text{ S/m}$; $\epsilon_r = 52.281$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/21/2020; Ambient Temp: 21.3°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.67 W/kg

SAR(1 g) = 4.06 W/kg; SAR(10 g) = 2.08 W/kg

Deviation(1 g) = 3.05%; Deviation(10 g) = 0.48%

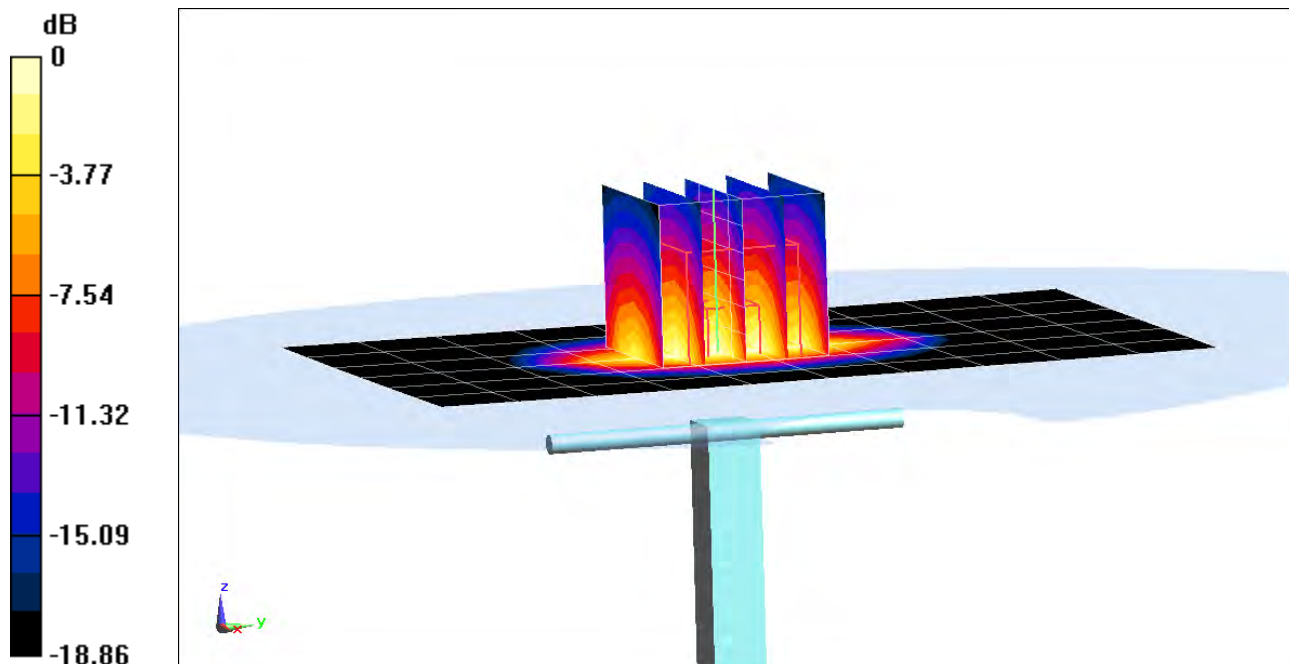

0 dB = 6.35 W/kg = 8.03 dBW/kg

PCTEST

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1073

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2300$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 51.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7552; ConvF(7.52, 7.52, 7.52) @ 2300 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2300 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 9.40 W/kg

SAR(10 g) = 2.31 W/kg

Deviation(10 g) = -0.43%

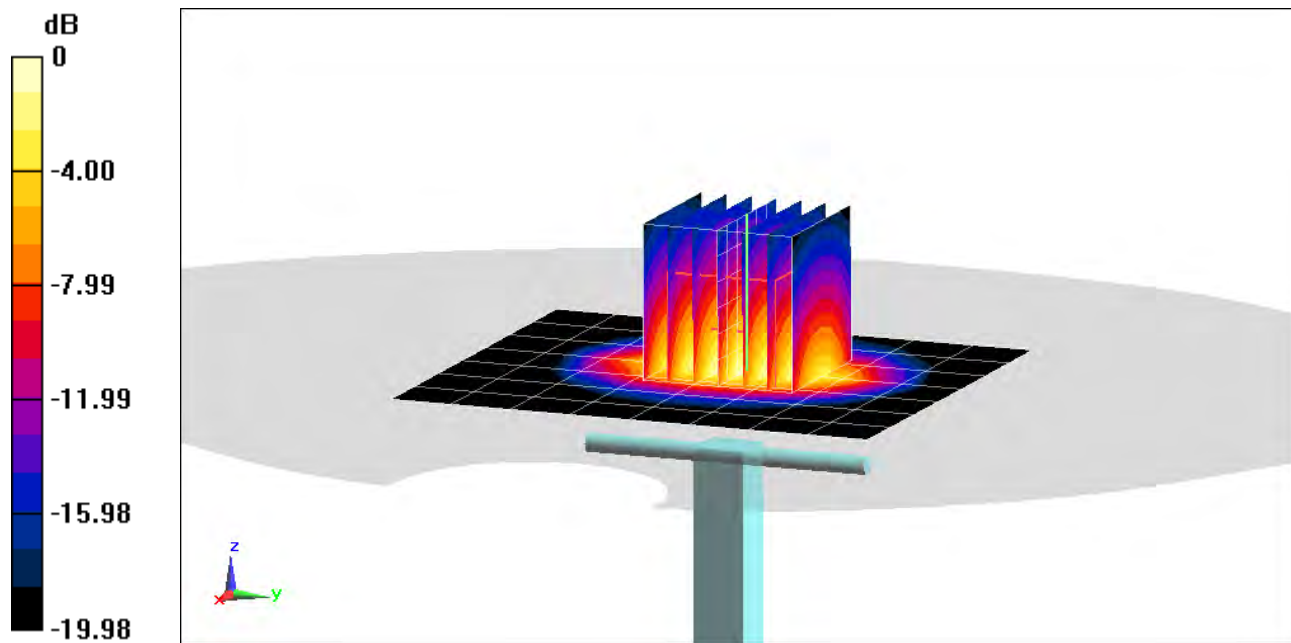

0 dB = 7.80 W/kg = 8.92 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.013 \text{ S/m}$; $\epsilon_r = 52.12$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/27/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7552; ConvF(7.47, 7.47, 7.47) @ 2450 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 4.96 W/kg

Deviation(1 g) = -2.36%

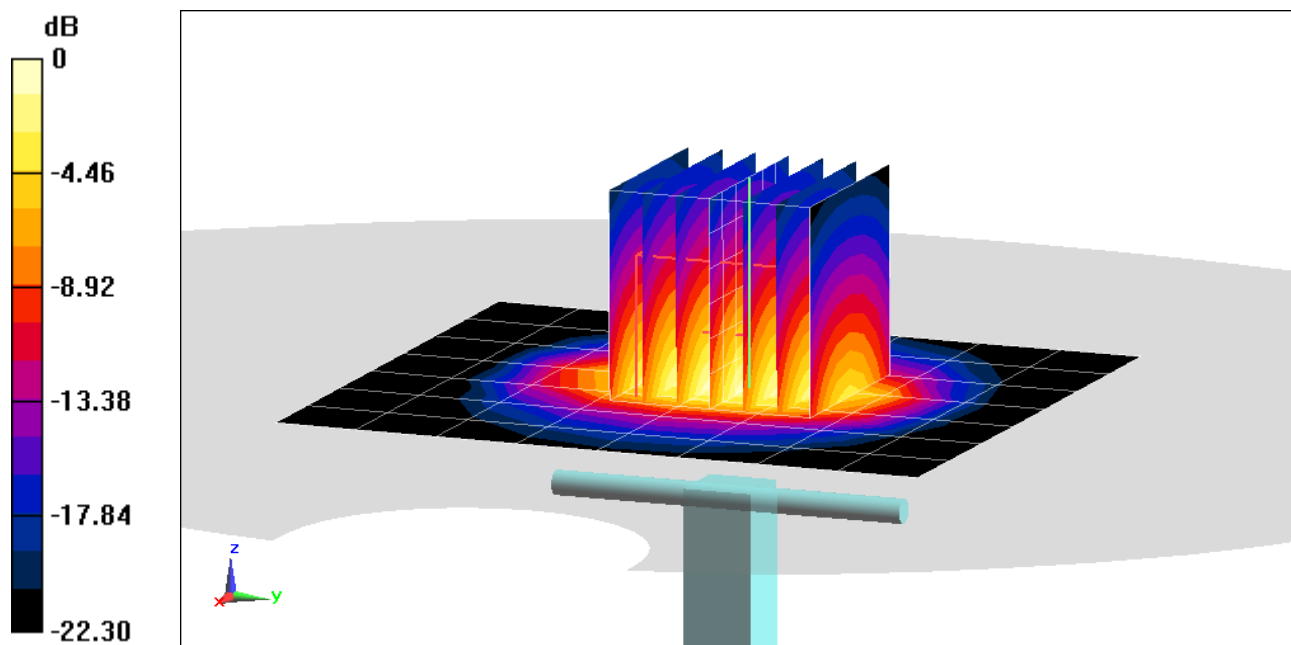

0 dB = 8.26 W/kg = 9.17 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.042 \text{ S/m}$; $\epsilon_r = 50.965$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/28/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2450 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.27 W/kg

Deviation(1 g) = 3.74%

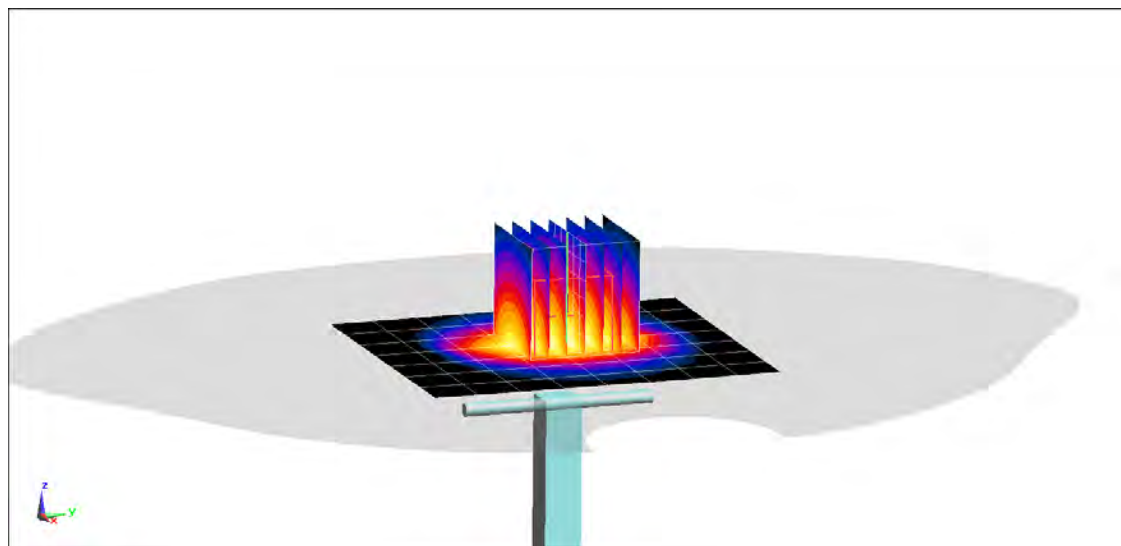

0 dB = 8.86 W/kg = 9.47 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 51.602$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/30/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7552; ConvF(7.47, 7.47, 7.47) @ 2450 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.4 W/kg

SAR(10 g) = 2.32 W/kg

Deviation(10 g) = -4.13%

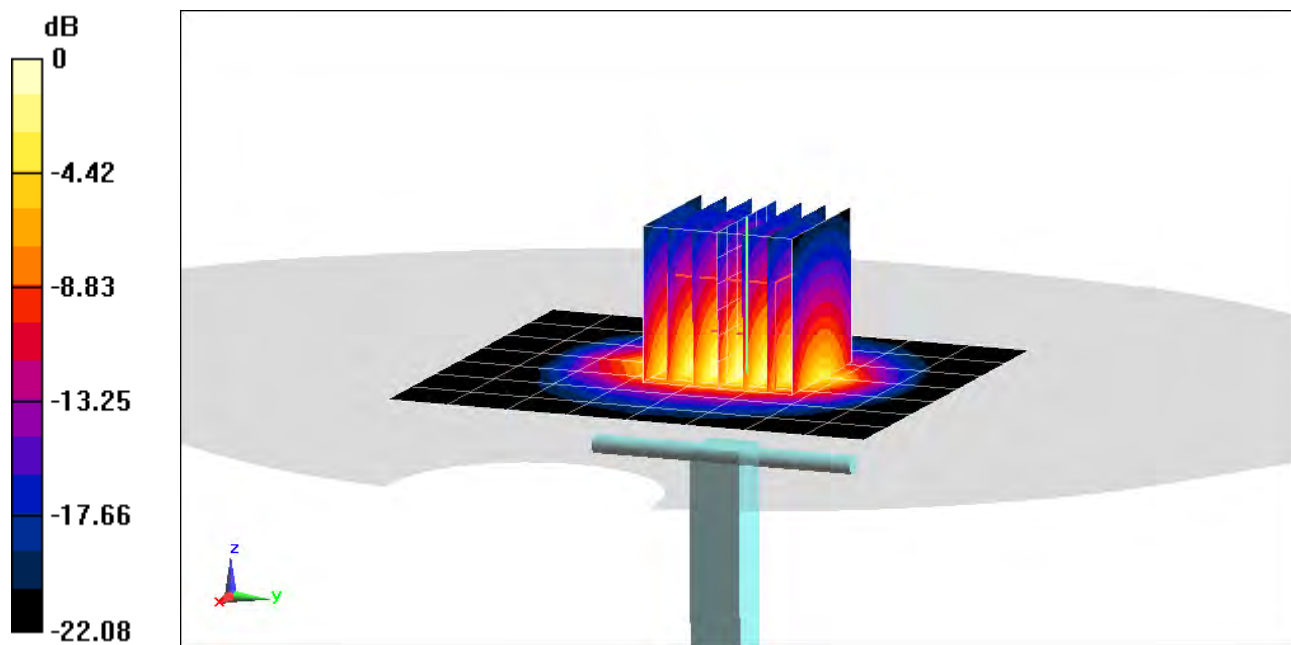

0 dB = 8.44 W/kg = 9.26 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.041 \text{ S/m}$; $\epsilon_r = 50.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07/02/2020; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2450 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.18 W/kg

Deviation(1 g) = 1.97%

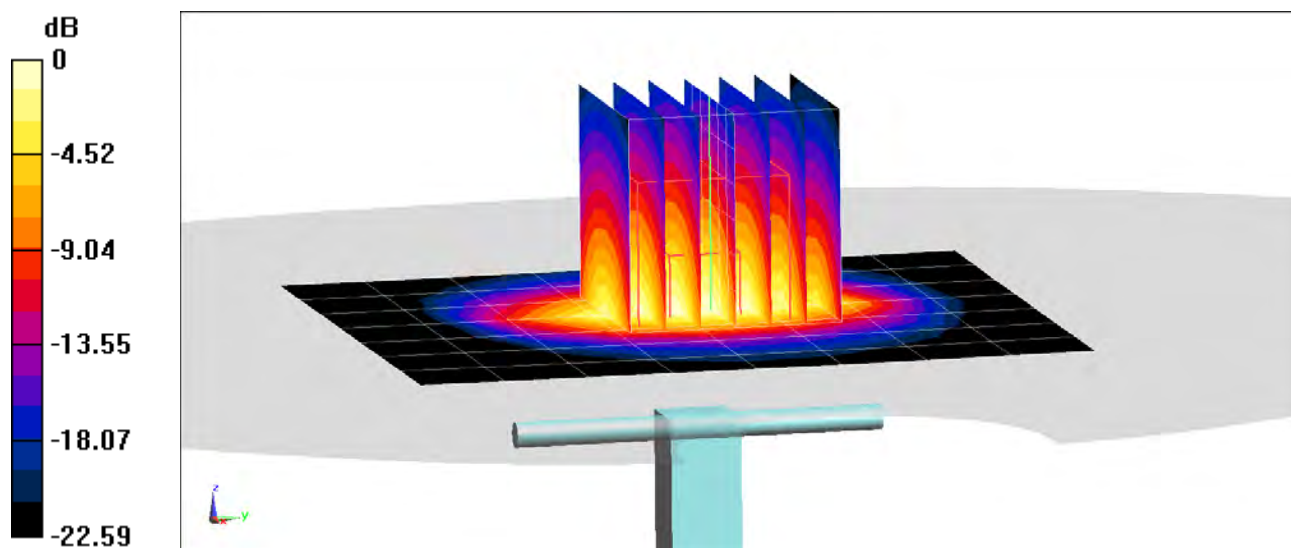

0 dB = 8.61 W/kg = 9.35 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.99 \text{ S/m}$; $\epsilon_r = 51.463$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07/11/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2450 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.19 W/kg

Deviation(1 g) = 2.17%

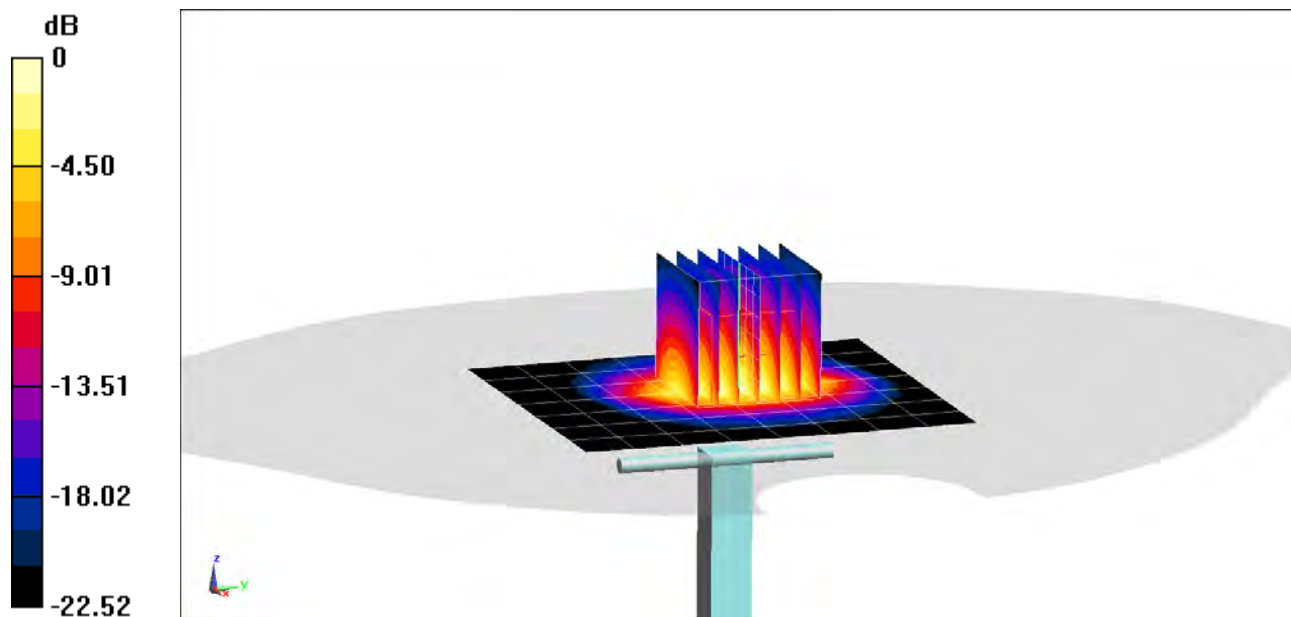

0 dB = 8.85 W/kg = 9.47 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.244$ S/m; $\epsilon_r = 50.987$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/17/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2600 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.75 W/kg

Deviation(1 g) = 4.93%

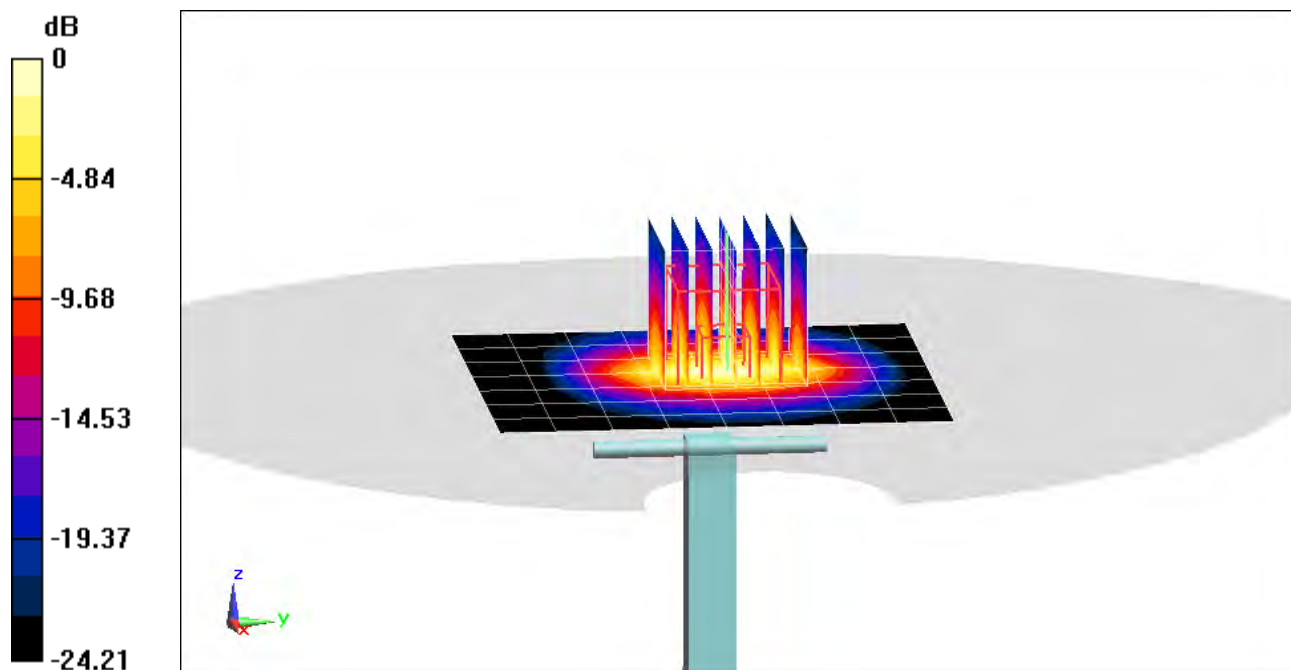

0 dB = 10.0 W/kg = 10.00 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.219$ S/m; $\epsilon_r = 51.533$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/27/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2600 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 5.92 W/kg

Deviation(1 g) = 6.47%

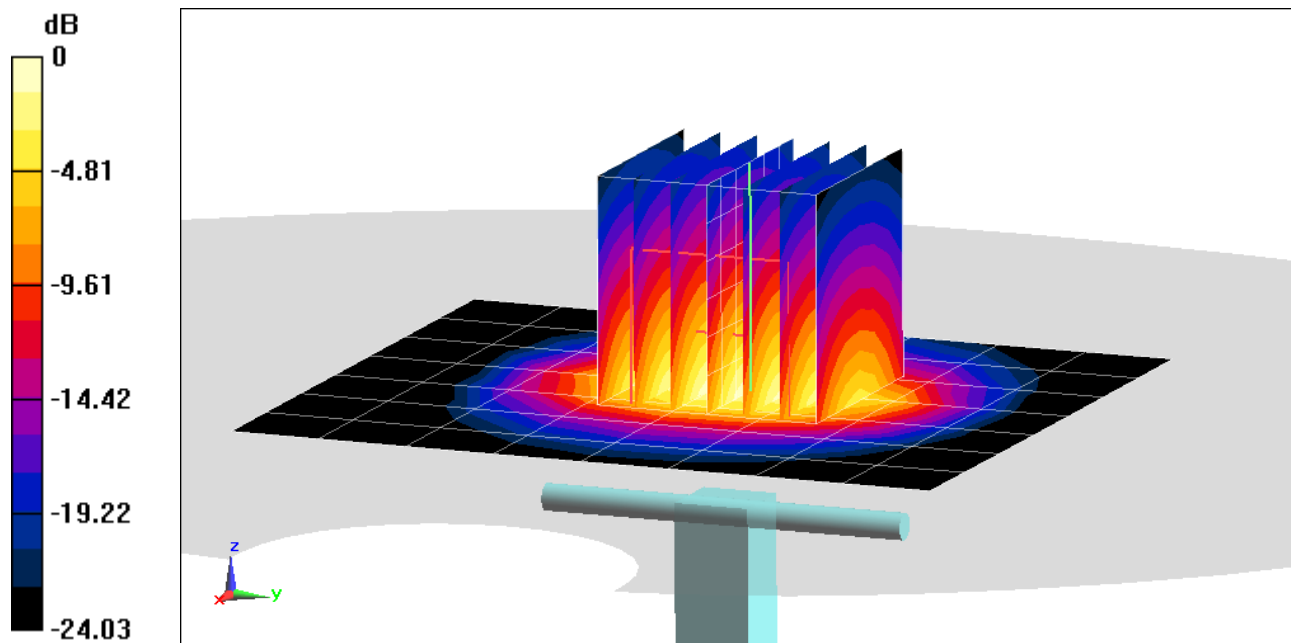

0 dB = 10.3 W/kg = 10.13 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.22 \text{ S/m}$; $\epsilon_r = 50.52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/28/2020; Ambient Temp: 22.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2600 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.67 W/kg

Deviation(1 g) = 1.98%

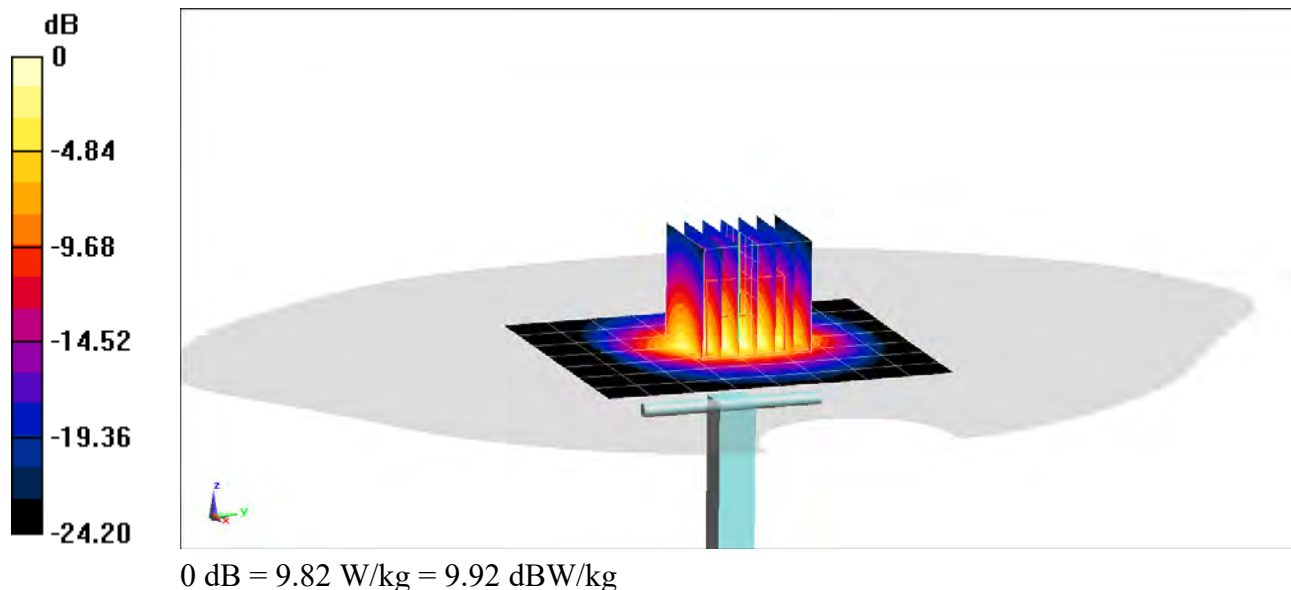

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.191$ S/m; $\epsilon_r = 51.037$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/30/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7552; ConvF(7.19, 7.19, 7.19) @ 2600 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.2 W/kg

SAR(10 g) = 2.45 W/kg

Deviation(10 g) = -0.81%

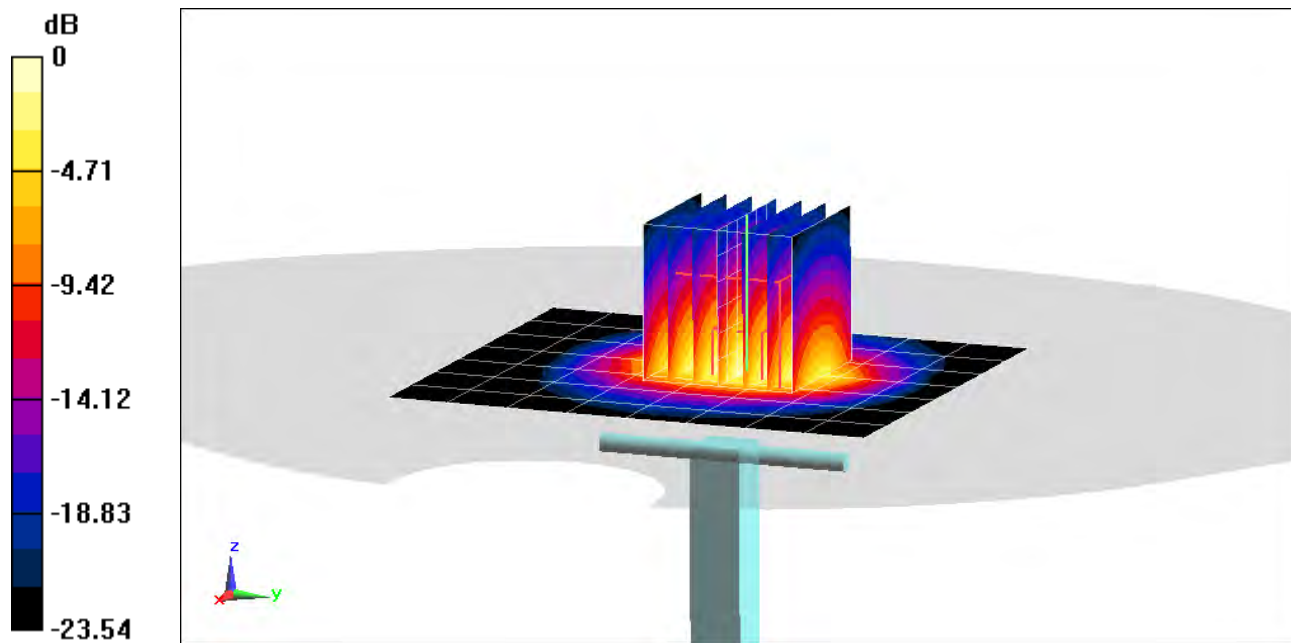

0 dB = 9.61 W/kg = 9.83 dBW/kg

PCTEST

DUT: Dipole 3500 MHz; Type: D3500V2; Serial: 1059

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: 3600 Body Medium parameters used:

$f = 3500 \text{ MHz}$; $\sigma = 3.38 \text{ S/m}$; $\epsilon_r = 49.224$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(7, 7, 7) @ 3500 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

3500 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 6.61 W/kg

Deviation(1 g) = 1.54%

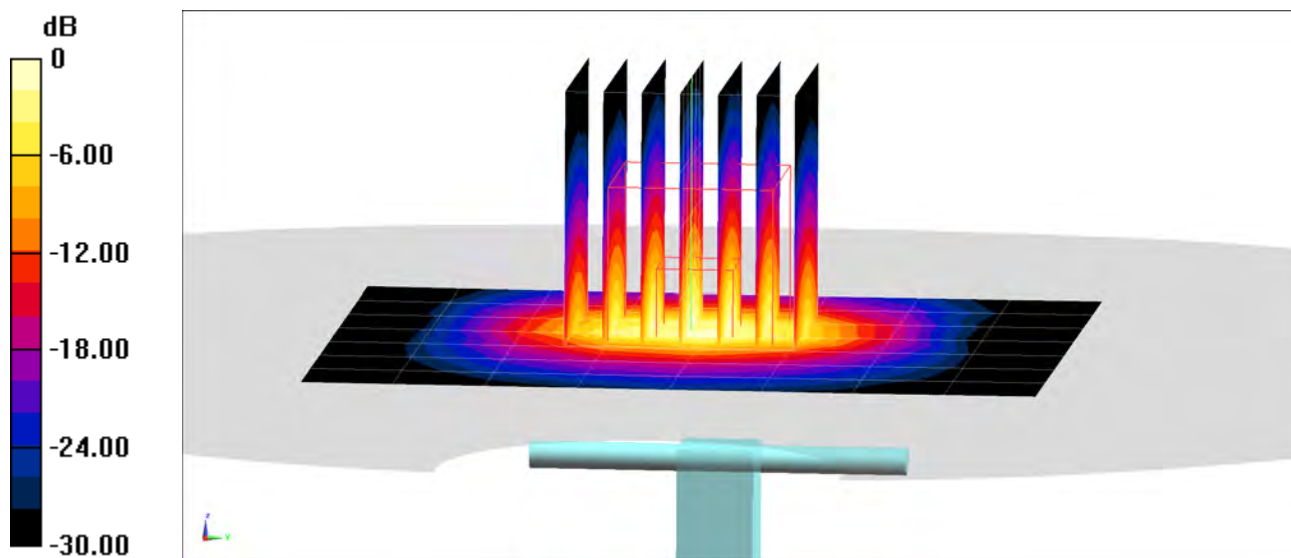

PCTEST

DUT: Dipole 3700 MHz; Type: D3700V2; Serial: 1018

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: 3600 Body Medium parameters used:

$f = 3700$ MHz; $\sigma = 3.592$ S/m; $\epsilon_r = 48.919$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/24/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(6.85, 6.85, 6.85) @ 3700 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

3700 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 6.56 W/kg

Deviation(1 g) = 2.02%

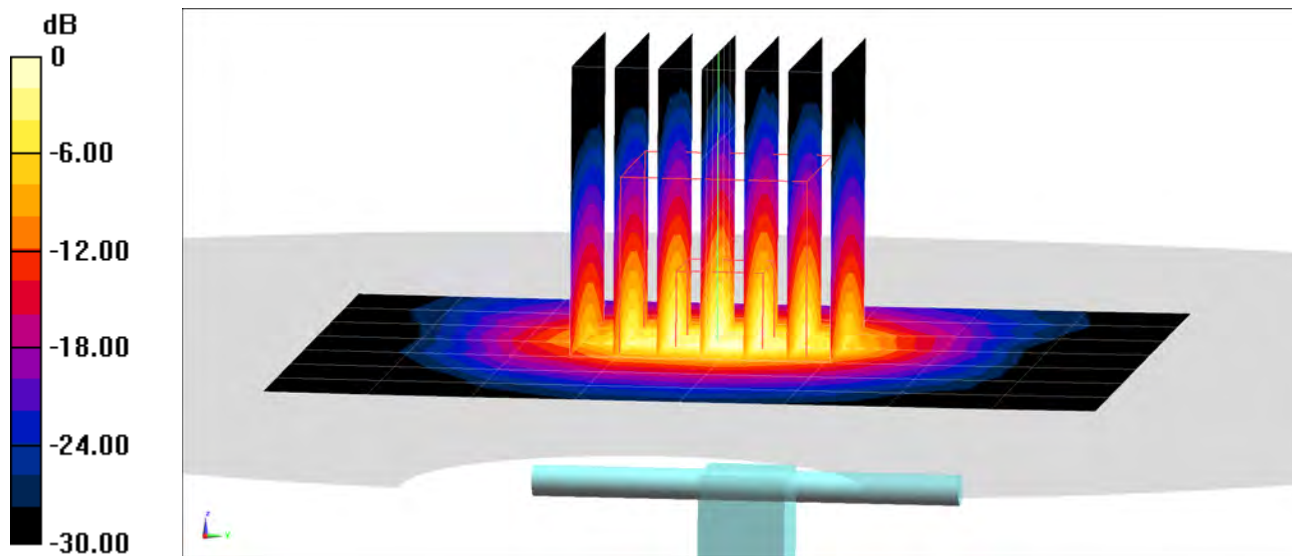

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5250$ MHz; $\sigma = 5.419$ S/m; $\epsilon_r = 48.521$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/1/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(4.7, 4.7, 4.7) @ 5250 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.6 W/kg

SAR(10 g) = 1.03 W/kg

Deviation(10 g) = -2.37%

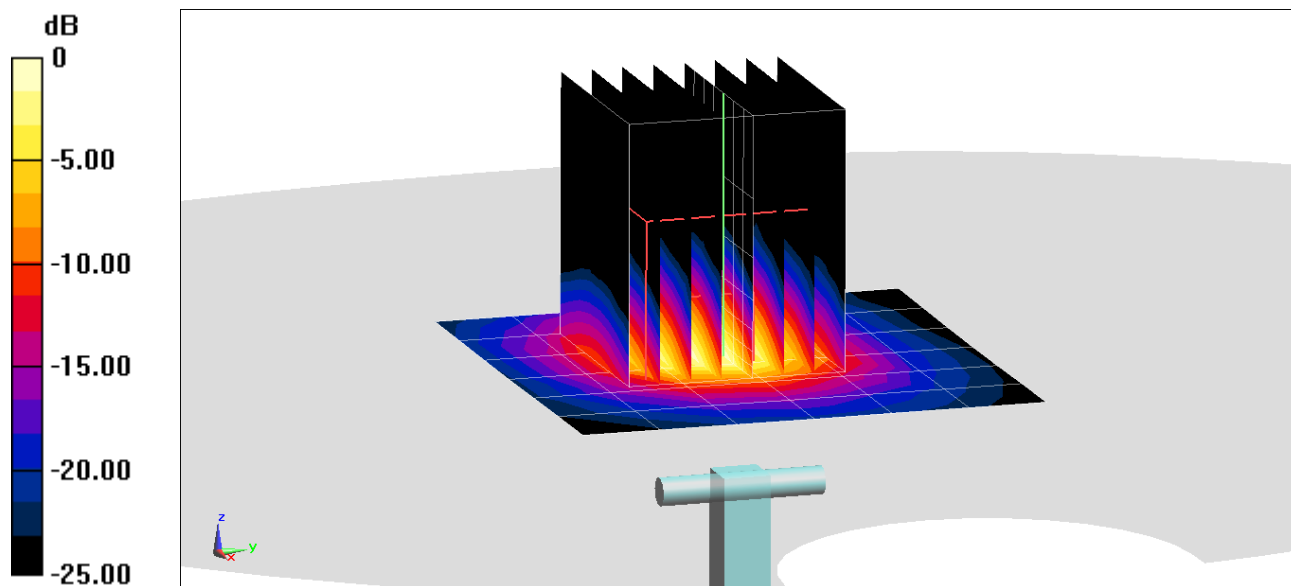

0 dB = 8.89 W/kg = 9.49 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.872$ S/m; $\epsilon_r = 47.456$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/1/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(4.22, 4.22, 4.22) @ 5600 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.3 W/kg

SAR(10 g) = 1.1 W/kg

Deviation(10 g) = -1.35%

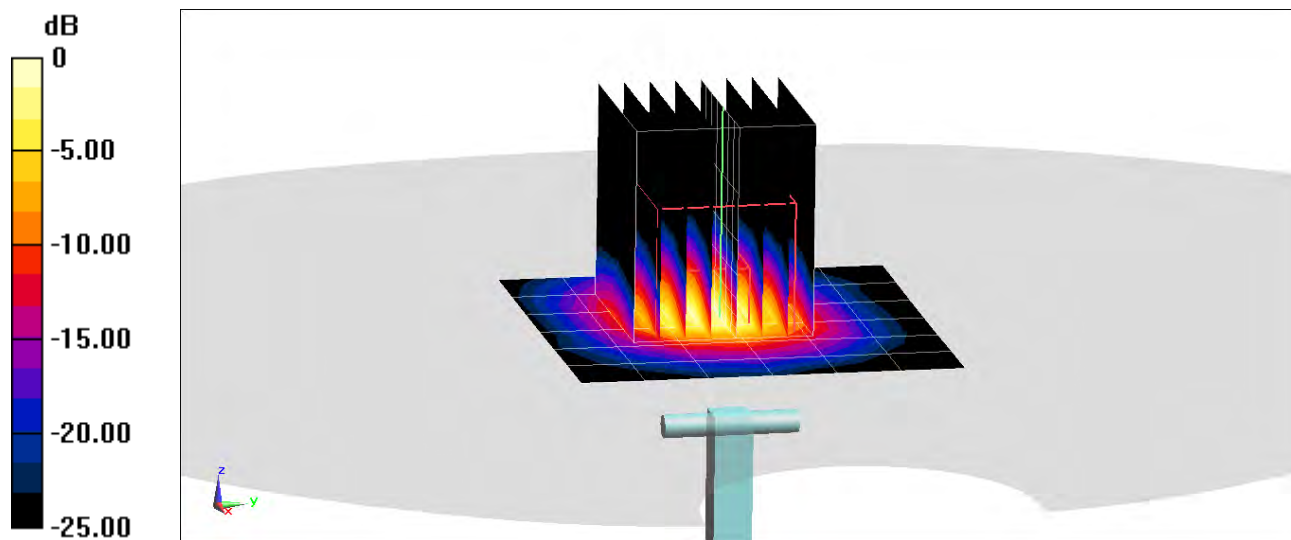

0 dB = 10.2 W/kg = 10.09 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5750 \text{ MHz}$; $\sigma = 6.05 \text{ S/m}$; $\epsilon_r = 46.893$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/1/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5750 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.9 W/kg

SAR(10 g) = 1.04 W/kg

Deviation(10 g) = -1.89%

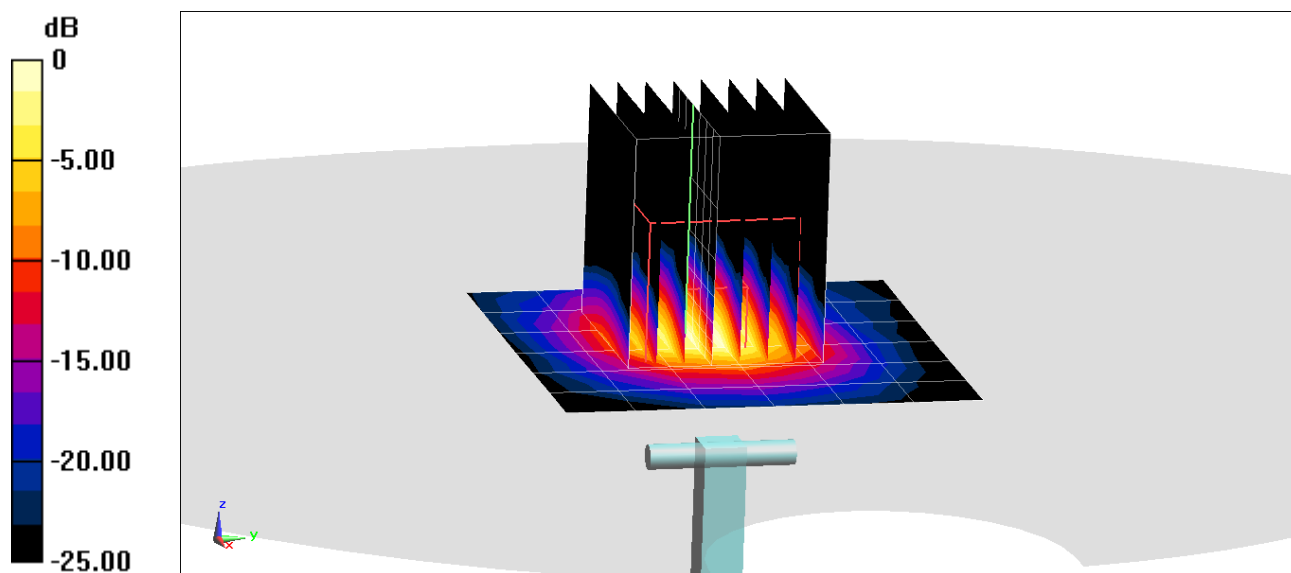

0 dB = 9.30 W/kg = 9.68 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used (interpolated):

$f = 5250$ MHz; $\sigma = 5.438$ S/m; $\epsilon_r = 47.538$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/14/2020; Ambient Temp: 22.6°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7538; ConvF(4.6, 4.6, 4.6) @ 5250 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 3.59 W/kg

Deviation(1 g) = -6.75%

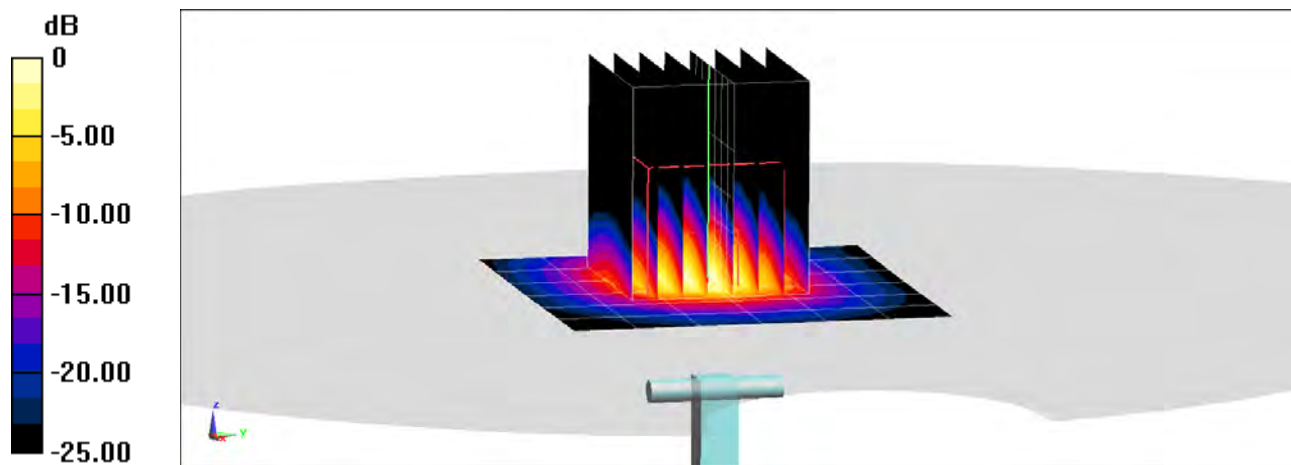

0 dB = 8.28 W/kg = 9.18 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.907$ S/m; $\epsilon_r = 46.984$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/14/2020; Ambient Temp: 22.6°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7538; ConvF(4.09, 4.09, 4.09) @ 5600 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.76 W/kg

Deviation(1 g) = -4.33%

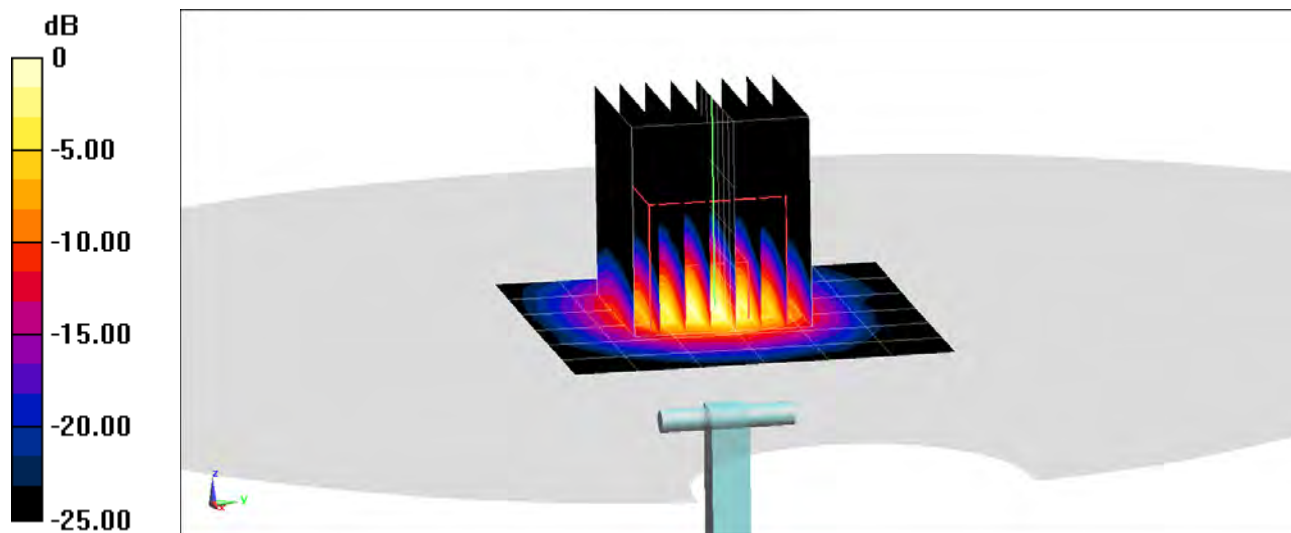

0 dB = 9.18 W/kg = 9.63 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.114 \text{ S/m}$; $\epsilon_r = 46.74$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 6/14/2020; Ambient Temp: 22.6°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7538; ConvF(4.17, 4.17, 4.17) @ 5750 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.68 W/kg

Deviation(1 g) = -4.29%

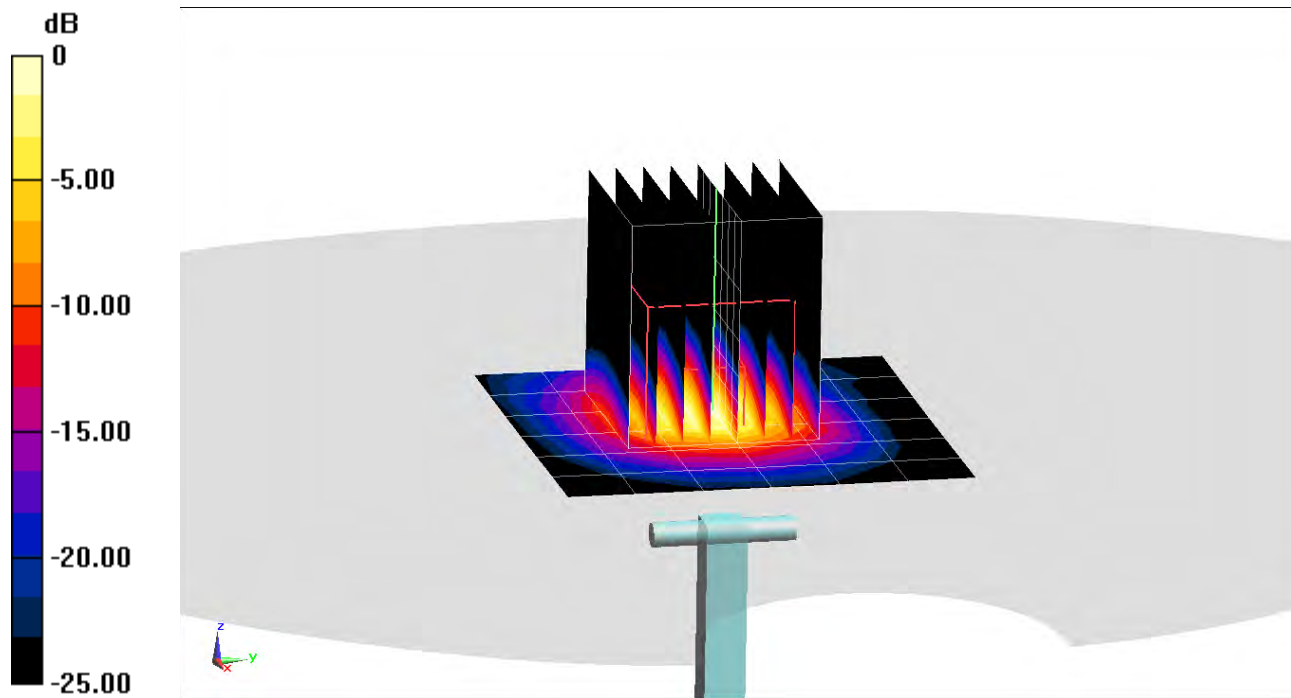

0 dB = 8.99 W/kg = 9.54 dBW/kg

APPENDIX C: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

3 Composition / Information on ingredients

3.2 Mixtures

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethanedial STOT RE 2, H373; Acute Tox. 4, H302	>1.0-4.9%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C₁₈ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

Additional information:

For the wording of the listed risk phrases refer to section 16.

Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.

The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

Figure C-1

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

FCC ID: A3LSMF707U		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 05/18/20 - 07/11/20	DUT Type: Portable Handset			APPENDIX C: Page 1 of 3

Measurement Certificate / Material Test

Item Name **Body Tissue Simulating Liquid (MBBL600-6000V6)**
 Product No. SL AAM U16 BC (Batch: 181029-1)
 Manufacturer SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the KDB 865864 compliance standard.

Test Condition



Ambient Condition 22°C ; 30% humidity
 TSL Temperature 22°C
 Test Date 30-Oct-18
 Operator CL

Additional Information

TSL Density
 TSL Heat-capacity

Results

f [MHz]	Measured			Target		Diff. to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
800	55.1	21.3	0.95	55.3	0.97	-0.4	-2.1
825	55.1	20.8	0.96	55.2	0.98	-0.3	-2.0
835	55.1	20.6	0.96	55.1	0.99	0.0	-2.5
850	55.1	20.4	0.96	55.2	0.99	-0.1	-3.0
900	55.0	19.7	0.98	55.0	1.05	0.0	-6.7
1400	54.2	15.6	1.22	54.1	1.28	0.2	-4.7
1450	54.1	15.4	1.24	54.0	1.30	0.2	-4.6
1500	54.1	15.3	1.27	53.9	1.33	0.3	-4.5
1550	54.0	15.1	1.30	53.9	1.36	0.2	-4.4
1600	53.9	15.0	1.33	53.8	1.39	0.2	-4.3
1625	53.9	14.9	1.35	53.8	1.41	0.3	-4.3
1640	53.9	14.9	1.36	53.7	1.42	0.3	-4.2
1650	53.8	14.9	1.36	53.7	1.43	0.2	-4.9
1700	53.8	14.8	1.40	53.6	1.46	0.4	-4.1
1750	53.7	14.7	1.43	53.4	1.49	0.5	-4.0
1800	53.7	14.6	1.46	53.3	1.52	0.8	-3.9
1810	53.7	14.6	1.47	53.3	1.52	0.8	-3.3
1825	53.7	14.6	1.48	53.3	1.52	0.8	-2.6
1850	53.6	14.5	1.50	53.3	1.52	0.6	-1.3
1900	53.5	14.5	1.53	53.3	1.52	0.4	0.7
1950	53.5	14.5	1.57	53.3	1.52	0.4	3.3
2000	53.4	14.4	1.60	53.3	1.52	0.2	5.3
2050	53.4	14.4	1.64	53.2	1.57	0.3	4.5
2100	53.3	14.4	1.68	53.2	1.62	0.2	3.7
2150	53.3	14.4	1.72	53.1	1.66	0.4	3.6
2200	53.2	14.4	1.76	53.0	1.71	0.3	2.9
2250	53.1	14.4	1.81	53.0	1.76	0.2	2.8
2300	53.1	14.4	1.85	52.9	1.81	0.4	2.2
2350	53.0	14.5	1.89	52.8	1.85	0.3	2.2
2400	52.9	14.5	1.94	52.8	1.90	0.2	2.1
2450	52.9	14.5	1.98	52.7	1.95	0.4	1.5
2500	52.8	14.6	2.03	52.6	2.02	0.3	0.5
2550	52.7	14.6	2.07	52.6	2.09	0.2	-1.0
2600	52.6	14.7	2.12	52.5	2.16	0.2	-1.9

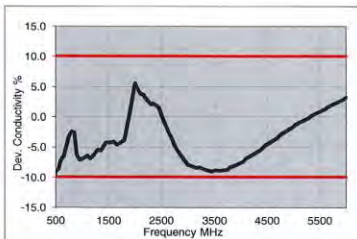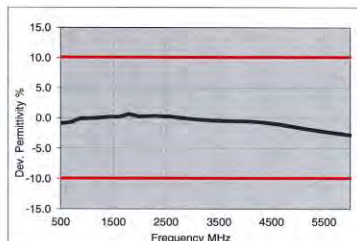

3500	51.1	15.5	3.02	51.3	3.31	-0.4	-8.8
3700	50.8	15.7	3.24	51.1	3.55	-0.5	-8.8
5200	48.1	18.2	5.27	49.0	5.30	-1.8	-0.6
5250	48.0	18.3	5.34	49.0	5.36	-1.9	-0.4
5300	47.9	18.4	5.41	48.9	5.42	-2.0	-0.2
5500	47.5	18.6	5.70	48.6	5.65	-2.2	0.8
5600	47.3	18.8	5.84	48.5	5.77	-2.3	1.3
5700	47.1	18.9	5.99	48.3	5.88	-2.5	1.8
5800	47.0	19.0	6.14	48.2	6.00	-2.6	2.3

TSL Dielectric Parameters

1

Figure C-2
600 – 5800 MHz Body Tissue Equivalent Matter

FCC ID: A3LSMF707U		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 05/18/20 - 07/11/20	DUT Type: Portable Handset			APPENDIX C: Page 2 of 3

Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HBL600-10000V6)
Product No.	SL AAH U16 BC (Batch: 181031-2)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Condition 22°C ; 30% humidity

TSL Temperature 22°C

Test Date 31-Oct-18

Operator CL



Additional Information

TSL Density

TSL Heat-capacity

Results

f [MHz]	Measured			Target		Diff.to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
800	43.8	20.5	0.91	41.7	0.90	5.1	1.4
825	43.8	20.1	0.92	41.6	0.91	5.3	1.5
835	43.8	19.9	0.93	41.5	0.91	5.4	2.0
850	43.7	19.7	0.93	41.5	0.92	5.3	1.5
900	43.5	18.9	0.95	41.5	0.97	4.8	-2.1
1400	42.5	15.0	1.17	40.6	1.18	4.7	-0.8
1450	42.5	14.8	1.19	40.5	1.20	4.9	-0.8
1600	42.2	14.3	1.27	40.3	1.28	4.7	-1.1
1625	42.2	14.2	1.29	40.3	1.30	4.8	-0.7
1640	42.2	14.2	1.30	40.3	1.31	4.8	-0.5
1650	42.1	14.2	1.30	40.2	1.31	4.6	-1.0
1700	42.1	14.0	1.33	40.2	1.34	4.8	-0.9
1750	42.0	13.9	1.36	40.1	1.37	4.8	-0.8
1800	41.9	13.9	1.39	40.0	1.40	4.7	-0.7
1810	41.9	13.8	1.40	40.0	1.40	4.7	0.0
1825	41.9	13.8	1.41	40.0	1.40	4.7	0.7
1850	41.8	13.8	1.42	40.0	1.40	4.5	1.4
1900	41.8	13.7	1.45	40.0	1.40	4.5	3.6
1950	41.7	13.7	1.48	40.0	1.40	4.3	5.7
2000	41.6	13.6	1.51	40.0	1.40	4.0	7.9
2050	41.6	13.6	1.55	39.9	1.44	4.2	7.3
2100	41.5	13.5	1.58	39.8	1.49	4.2	6.1
2150	41.4	13.5	1.62	39.7	1.53	4.2	5.7
2200	41.4	13.5	1.65	39.6	1.58	4.4	4.6
2250	41.3	13.5	1.69	39.6	1.62	4.4	4.2
2300	41.2	13.5	1.72	39.5	1.67	4.4	3.2
2350	41.1	13.5	1.76	39.4	1.71	4.4	2.9
2400	41.1	13.5	1.80	39.3	1.76	4.6	2.5
2450	41.0	13.5	1.84	39.2	1.80	4.6	2.2
2500	40.9	13.5	1.88	39.1	1.85	4.5	1.4
2550	40.8	13.5	1.92	39.1	1.91	4.4	0.6
2600	40.8	13.6	1.95	39.0	1.96	4.6	-0.2
3500	39.2	14.1	2.74	37.9	2.91	3.3	-5.8
3700	38.9	14.2	2.93	37.7	3.12	3.1	-6.1



5200	36.3	15.8	4.57	35.0	4.66	0.9	-1.7
5250	36.2	15.9	4.63	35.9	4.71	0.8	-1.6
5300	36.1	15.9	4.69	35.9	4.76	0.7	-1.4
5500	35.8	16.1	4.92	35.6	4.96	0.3	-0.9
5600	35.6	16.2	5.04	35.5	5.07	0.1	-0.6
5700	35.4	16.2	5.15	35.4	5.17	0.0	-0.3
5800	35.2	16.3	5.27	35.3	5.27	-0.2	0.0
6000	34.9	16.5	5.50	35.1	5.48	-0.6	0.5
6500	34.0	16.9	6.12	34.5	6.07	-1.4	0.9
7000	33.1	17.3	6.74	33.9	6.65	-2.3	1.3
7500	32.2	17.6	7.36	33.3	7.24	-3.2	1.6
8000	31.4	17.9	7.97	32.7	7.84	-4.1	1.7
8500	30.5	18.2	8.59	32.1	8.45	-5.0	1.6
9000	29.7	18.4	9.20	31.5	9.08	-5.9	1.3
9500	28.9	18.5	9.80	31.0	9.71	-6.8	0.9
10000	28.1	18.7	10.40	30.4	10.36	-7.6	0.4

TSL Dielectric Parameters

1

Figure C-3
 600 – 5800 MHz Head Tissue Equivalent Matter

FCC ID: A3LSMF707U		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 05/18/20 - 07/11/20	DUT Type: Portable Handset			APPENDIX C: Page 3 of 3

APPENDIX D: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table D-1
SAR System Validation Summary – 1g

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE CAL. POINT	COND.		PERM.	CW VALIDATION			MOD. VALIDATION		
					(σ)	(ε _r)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR	
L	750	9/24/2019	7410	750	Head	0.878	42.471	PASS	PASS	PASS	N/A	N/A	N/A
P	835	10/1/2019	7551	835	Head	0.918	41.18	PASS	PASS	PASS	GMSK	PASS	N/A
P	1750	10/2/2019	7551	1750	Head	1.346	39.45	PASS	PASS	PASS	N/A	N/A	N/A
L	1900	9/24/2019	7410	1900	Head	1.442	39.947	PASS	PASS	PASS	GMSK	PASS	N/A
P	1900	10/2/2019	7551	1900	Head	1.444	39.26	PASS	PASS	PASS	GMSK	PASS	N/A
E	2300	2/5/2020	3589	2300	Head	1.717	39.033	PASS	PASS	PASS	N/A	N/A	N/A
L	2450	9/5/2019	7410	2450	Head	1.85	39.32	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
E	2450	2/5/2020	3589	2450	Head	1.823	38.835	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
E	2600	2/5/2020	3589	2600	Head	1.933	38.635	PASS	PASS	PASS	TDD	PASS	N/A
D	3500	2/4/2020	7488	3500	Head	2.862	36.886	PASS	PASS	PASS	TDD	PASS	N/A
D	3700	2/4/2020	7488	3700	Head	3.037	36.597	PASS	PASS	PASS	TDD	PASS	N/A
H	5250	5/7/2020	7357	5250	Head	4.644	35.12	PASS	PASS	PASS	OFDM	N/A	PASS
H	5600	5/7/2020	7357	5600	Head	5.03	34.51	PASS	PASS	PASS	OFDM	N/A	PASS
H	5750	5/7/2020	7357	5750	Head	5.207	34.26	PASS	PASS	PASS	OFDM	N/A	PASS
L	750	8/20/2019	7410	750	Body	0.941	54.921	PASS	PASS	PASS	N/A	N/A	N/A
D	835	2/20/2020	7488	835	Body	1.001	53.45	PASS	PASS	PASS	GMSK	PASS	N/A
P	835	9/26/2019	7551	835	Body	0.991	54.104	PASS	PASS	PASS	GMSK	PASS	N/A
I	1750	4/7/2020	7527	1750	Body	1.506	54.99	PASS	PASS	PASS	N/A	N/A	N/A
I	1750	6/17/2020	7570	1750	Body	1.518	52.03	PASS	PASS	PASS	N/A	N/A	N/A
L	1750	8/16/2019	7410	1750	Body	1.467	53.429	PASS	PASS	PASS	N/A	N/A	N/A
J	1900	1/1/2020	7571	1900	Body	1.579	51.919	PASS	PASS	PASS	GMSK	PASS	N/A
K	2300	9/5/2019	7547	2300	Body	1.893	52.45	PASS	PASS	PASS	N/A	N/A	N/A
O	2450	5/27/2020	7552	2450	Body	2.038	55.028	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
K	2450	9/6/2019	7547	2450	Body	1.996	51.898	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
K	2450	7/7/2020	7409	2450	Body	2.018	51.18	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
O	2600	5/27/2020	7552	2600	Body	2.183	54.825	PASS	PASS	PASS	TDD	PASS	N/A
K	2600	9/5/2019	7547	2600	Body	2.176	52.04	PASS	PASS	PASS	TDD	PASS	N/A
D	3500	2/12/2020	7488	3500	Body	3.373	50.003	PASS	PASS	PASS	TDD	PASS	N/A
D	3700	2/12/2020	7488	3700	Body	3.585	49.719	PASS	PASS	PASS	TDD	PASS	N/A
G	5250	6/9/2020	7538	5250	Body	5.4	47.53	PASS	PASS	PASS	OFDM	N/A	PASS
G	5600	6/9/2020	7538	5600	Body	5.857	46.97	PASS	PASS	PASS	OFDM	N/A	PASS
G	5750	6/9/2020	7538	5750	Body	6.061	46.723	PASS	PASS	PASS	OFDM	N/A	PASS

Table D-2
SAR System Validation Summary – 10g

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE CAL. POINT		COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
						(σ)	(ε _r)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
I	1750	4/7/2020	7527	1750	Body	1.506	54.99	PASS	PASS	PASS	N/A	N/A	N/A
L	1750	8/16/2019	7410	1750	Body	1.467	53.429	PASS	PASS	PASS	N/A	N/A	N/A
J	1900	1/1/2020	7571	1900	Body	1.579	51.919	PASS	PASS	PASS	GMSK	PASS	N/A
O	2300	5/29/2020	7552	2300	Body	1.986	55.28	PASS	PASS	PASS	N/A	N/A	N/A
O	2450	5/27/2020	7552	2450	Body	2.038	55.028	PASS	PASS	PASS	OFDM/TDO	PASS	PASS
O	2600	5/27/2020	7552	2600	Body	2.183	54.825	PASS	PASS	PASS	TDD	PASS	N/A
G	5250	10/4/2019	7409	5250	Body	5.223	47.07	PASS	PASS	PASS	OFDM	N/A	PASS
G	5600	10/7/2019	7409	5600	Body	5.884	47.08	PASS	PASS	PASS	OFDM	N/A	PASS
G	5750	10/7/2019	7409	5750	Body	6.111	46.78	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID: A3LSMF707U		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			Appendix D Page 1 of 1

APPENDIX F: DOWNLINK LTE CA RF CONDUCTED POWERS

1.1 LTE Downlink Only Carrier Aggregation Test Reduction Methodology

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA_2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.
- Downlink CA combinations for SISO and 4x4 Downlink MIMO operations were measured independently, per May 2017 TCBC Workshop notes.

Table 1 – Example of Exclusion Table for SISO Configurations

[illegible]

Table 2 – Example of Exclusion Table for 4x4 Downlink MIMO Configurations

Index	ACC	Supported Channel Bandwidth (MHz)			Restriction	Completely Covered by Measurement Superset
		CC1	CC2	CC3		
2CC RM1	CA [2C]	5, 10, 15, 20	5, 10, 15, 20		ICC RM6	No
2CC RM2	CA [2A, 2B]	5, 10, 15, 20	5, 10, 15, 20		ICC RM1	No
2CC RM3	CA [2A, 2D]	5, 10, 15, 20	5, 10, 15, 20		ICC RM8	No
2CC RM4	CA [2A, 4A] (2)	5, 10, 15, 20	5, 10, 15, 20		ICC RM1	No
2CC RM5	CA [2A, 4A] (2)	5, 10, 15, 20	5, 10, 15, 20		ICC RM5	No
2CC RM6	CA [2A, 5A]	5, 10, 15, 20	5, 10		ICC RM3	No
2CC RM7	CA [2A, 32A] (1)	5, 10, 15, 20	3, 10		No	No
2CC RM8	CA [2A, 32A]	5, 10, 15, 20	10		ICC RM4	No
2CC RM9	CA [2A, 37A]	5, 10			ICC RM1	No
2CC RM10	CA [2A, 28A] (2)	5, 10, 15, 20	5, 10		B29 SCC Only	No
2CC RM11	CA [2A, 28A]	5, 10, 15, 20	5, 10		ICC RM2	No
2CC RM12	CA [2A, 66A] (2)	5, 10, 15, 20	5, 10, 15, 20		ACC RM1	No
2CC RM13	CA [2A, 66A] (2)	5, 10, 15, 20	5, 10, 15, 20		ACC RM2	No
2CC RM14	CA [2A, 128A] (6A) (1)	5, 10, 15, 20	5, 10, 15, 20		ICC RM1	No
2CC RM15	CA [2A, 71A]	5, 10, 15, 20	5, 10, 15, 20		ICC RM1	No
2CC RM16	CA 5A (66A)	5, 10	5, 10, 15, 20		ICC RM16	No
2CC RM17	CA 13A (66A) (6)	5, 10, 15, 20	5, 10, 15, 20		ICC RM17	No
2CC RM18	CA 13A (66A)	5, 10	5, 10, 15, 20		ICC RM18	No
2CC RM19	CA 30A (66A)	5, 10	5, 10, 15, 20		ICC RM20	No
2CC RM20	CA 10A (66A)	5, 10, 15, 20	5, 10, 15		ICC RM20	No
2CC RM21	CA (66C)	5, 10, 15, 20	5, 10, 15, 20		ACC RM6	No
2CC RM22	CA (66A) (66A)	5, 10, 15, 20	5, 10, 15, 20		ICC RM20	No
2CC RM23	CA (66A) (66A)	5, 10, 15, 20	5, 10, 15, 20		No	No

Note: [CC] indicates component carrier with 4x4 DL MIMO antenna configuration

FCC ID: A3LSMF707U	 PCTEST (Proud to be part of the ecosystem)	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 1 of 11		

1.2 LTE Downlink Only Carrier Aggregation Test Selection and Setup

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by the product implementation. For those configurations required by April 2018 TCBC Workshop Notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the maximum average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive. All bands required for SAR testing per FCC KDB procedures were considered. Based on the measured maximum powers below, no additional SAR tests were required for DLCA SAR configurations.

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.




Figure 1
DL CA Power Measurement Setup

FCC ID: A3LSMF707U	 PCTEST Present to the part of the	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX F: Page 2 of 11

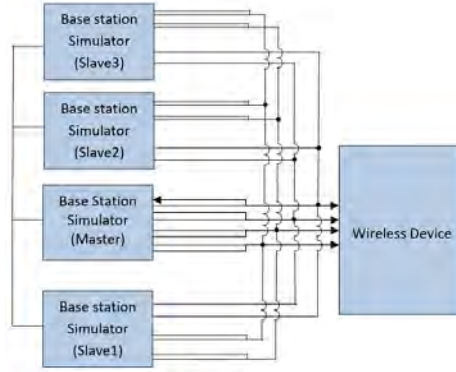


Figure 2
DL CA with DL 4x4 MIMO Power Measurement Setup

1.3 Downlink Carrier Aggregation RF Conducted Powers

1.3.1 LTE Band 71 as PCC

Table 1
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch. Freq. [MHz]	PCC				PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC 1			SCC 2			SCC 3			LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)	
				Mod.	PCC UL RB	PCC UL RB Offset	SCC Band				SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]			SCC (DL) Channel
CA 4A-4A-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	-	-	-	25.18	25.07	
CA 4B4-4B4-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B4B	20	5590	3625	LTE B4B	20	5640	3690	-	-	-	24.65	25.07	
CA 4B4-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B4B	20	5590	3625	LTE B4B	20	56188	3644.8	-	-	-	24.70	25.07	
CA 2A-2A-4A-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B4	20	2175	2132.5	25.19	25.07
CA 2A-2A-6B4-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B6B	20	66786	2145	25.20	25.07
CA 2A-6B4-6B4-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B2	20	900	1960	LTE B6B	20	66786	2145	LTE B6B	20	67236	2190	25.21	25.07
CA 2A-6B4-71A	LTE B71	10	133172	QPSK	1	25	68636	622	LTE B2	20	900	1960	LTE B6B	20	66786	2145	LTE B6B	20	66984	2164.8	25.18	25.07

1.3.2 LTE Band 12 as PCC

Table 2
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC				PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC 1			SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC 2			SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC 3			SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
				Mod.	PCC UL RB	PCC UL RB Offset	PCC (UL) Freq. [MHz]			SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]				SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]				SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]					
CA 2A-12A (1)	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24.40	24.40
CA 4A-12A (1)	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B4	20	2175	2132.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24.16	24.40
CA 4A-12A (2)	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B4	20	2175	2132.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24.16	24.40
CA 12A-12A	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2B	20	1365	192.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24.15	24.40
CA 12A-6B4 (1)	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B6B	20	66786	2145	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	25.11	24.40
CA 12A-6B4 (2)	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B6B	20	66786	2145	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24.11	24.40
CA 4A-4A-12A	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24.08	24.40
CA 2A-2A-4A-12A	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B4	20	2175	2132.5	-	-	-	-	-	-	-	-	-	-	24.20	24.40
CA 2A-2A-12B	LTE B12	5	23095	QPSK	1	24	5095	737.5	LTE B12	5	5547	732.7	LTE B2	20	900	1960	LTE B2	20	700	1940	-	-	-	-	-	-	-	-	-	-	24.03	24.23
CA 2A-12A-6B4	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	LTE B6B	20	66786	2145	LTE B6B	20	66984	2164.8	-	-	-	-	-	-	-	-	-	-	24.13	24.40
CA 2A-2A-12A-30A-6B4	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B30	20	9020	2355	LTE B6B	20	66786	2145	-	-	-	-	-	-	23.76	24.40
CA 2A-2A-12A-6B4-6B4	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B6B	20	66786	2145	LTE B6B	20	67236	2190	-	-	-	-	-	-	23.67	24.40
CA 2A-12A-30A-6B4-6B4	LTE B12	10	23095	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	LTE B30	10	9820	2355	LTE B6B	20	66786	2145	LTE B6B	20	67236	2190	-	-	-	-	-	-	23.70	24.40

FCC ID: A3LSMF707U		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX F: Page 3 of 11

1.3.3 LTE Band 13 as PCC

Table 3
Maximum Output Powers

Combination	PCB Band	PCB BW [MHz]	PCF U/L [MHz]	PCC			SCC1				SCC2				SCC3				SCC4				Power						
				Mod.	PCF U/L RB	PCF U/L RB Offset	PCF [L] Channel	PCF [U] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [L] Channel	SCC [U] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [L] Channel	SCC [U] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [L] Channel	SCC [U] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [L] Channel	SCC [U] Freq. [MHz]	LTE Tx Power with CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)			
CA 2A-4A-13A	LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4	20	2175	2132.5	-	-	-	-	-	-	-	-	-	-	24.75	23.00
CA 4A-4A-13A	LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	-	-	-	-	-	-	-	-	-	-	24.75	23.00
CA 2A-13A-40C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B6B	20	66786	2145	LTE B6B	20	66984	2164.8	-	-	-	-	-	-	24.85	23.16
CA 13A-4A-66B	LTE B13	5	23230	782	QPSK	1	0	5040	751	LTE B4B	20	65960	3625	LTE B6B	15	66786	2149	LTE B6B	5	66979	2154.3	-	-	-	-	-	-	24.85	23.16
CA 13A-4A-66C	LTE B13	5	23230	782	QPSK	1	0	5040	751	LTE B4B	20	65960	3625	LTE B6B	15	66786	2149	LTE B6B	5	66979	2154.3	-	-	-	-	-	-	24.85	23.16
CA 2A-2A-13A-66A-66B	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B2	20	700	1940	LTE B6B	20	66786	2145	LTE B6B	20	66979	2154.3	24.84	23.16		
CA 2A-2A-13A-66B	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B2	20	700	1940	LTE B6B	15	66786	2145	LTE B6B	5	66979	2154.3	24.84	23.16		
CA 2A-13A-4A-66A-66B	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4B	20	55990	3625	LTE B4B	20	56188	3644.8	-	-	-	-	-	-	24.85	23.16
CA 2A-13A-4A-48C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4B	20	55990	3625	LTE B4B	20	56642	3670.2	-	-	-	-	-	-	24.87	23.16
CA 2A-13A-4A-66A	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4B	20	55990	3625	LTE B4B	20	56188	3644.8	-	-	-	-	-	-	24.85	23.16
CA 2A-13A-48C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4B	20	55990	3625	LTE B4B	20	56642	3670.2	-	-	-	-	-	-	24.87	23.16
CA 2A-13A-4A-66B	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4B	20	55990	3625	LTE B4B	20	56188	3644.8	-	-	-	-	-	-	24.87	23.16
CA 13A-4A-48C-66A	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1900	LTE B4B	20	55990	3625	LTE B4B	20	56642	3670.2	-	-	-	-	-	-	24.87	23.16
CA 13A-4A-48C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B4B	20	55990	3625	LTE B4B	20	56340	3560	LTE B4B	20	56538	3579.8	-	-	-	-	-	-	24.86	23.16
CA 13A-4A-66A	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B4B	20	55990	3625	LTE B4B	20	56340	3560	LTE B4B	20	56538	3579.8	-	-	-	-	-	-	24.86	23.16
CA 13A-4A-66B	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B4B	20	55990	3625	LTE B4B	20	56340	3560	LTE B4B	20	56538	3579.8	-	-	-	-	-	-	24.86	23.16
CA 13A-4A-48C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B4B	20	55990	3625	LTE B4B	20	56188	3644.8	LTE B6B	15	66786	2145	LTE B6B	5	66979	2154.3	24.81	23.16		
CA 13A-4A-66C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B4B	20	55990	3625	LTE B4B	20	56188	3644.8	LTE B6B	15	66786	2145	LTE B6B	5	66979	2154.3	24.81	23.16		
CA 13A-48C	LTE B13	5	23230	782	QPSK	1	0	5230	751	LTE B4B	20	55990	3625	LTE B4B	20	56188	3644.8	LTE B6B	15	66786	2145	LTE B6B	5	66979	2154.3	24.81	23.16		

1.3.4 LTE Band 14 as PCC

Table 4
Maximum Output Powers

Combination	PCC										SCC 1				SCC 2				SCC 3				SCC 4				Power	
	PCC Band	PCC BW [MHz]	PCC [UL] Ch	PCC [UL] Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC [DL] Channel	PCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	LTE Tx Power with DL CA (dBm)	LTE Single Carrier Tx Power (dBm)	
CA_2A-2A-14A-20A-66A	LTE B14	10	21300	793	QPSK	1	0	5330	763	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B30	10	9820	2350	LTE B66	20	66786	2145	25.67	25.69	
CA_2A-2A-14A-66A-66A	LTE B14	10	21300	793	QPSK	1	0	5330	763	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B66	20	66786	2145	LTE B66	20	66786	2145	25.68	25.68	
CA_2A-14A-30A-66A-66A	LTE B14	10	21300	793	QPSK	1	0	5330	763	LTE B2	20	900	1960	LTE B30	10	9820	2350	LTE B66	20	66786	2145	LTE B66	20	67236	2190	25.64	25.65	

1.3.5 LTE Band 5 as PCC

Table 5
Maximum Output Powers

[illegible]

FCC ID: A3LSMF707U	  	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 4 of 11

1.3.6 LTE Band 26 as PCC

Table 6
Maximum Output Powers

Combination	PCC							SSC 1				SSC 2				SSC 3				Power			
	PCC Band	PCC BW [MHz]	PCC [UL] Ch. Freq. [MHz]	Mod.	PCC UL# RB	PCC UL# RB Offset	PCC [DL] Channel Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [DL] Channel Freq. [MHz]	SSC [DL] Channel Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [DL] Channel Freq. [MHz]	SSC [DL] Channel Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [DL] Channel Freq. [MHz]	SSC [DL] Channel Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)		
CA_25A-25A-25A	LTE B26	3	26865	631.6	QPSK	1	7	8865	876.5	LTE B25	20	8365	1962.5	LTE B25	20	8390	1985	-	-	-	25.71	25.54	
CA_25A-25A-41A	LTE B26	3	26865	631.6	QPSK	1	7	8865	876.5	LTE B25	20	8365	1962.5	LTE B41	20	40620	2593	-	-	-	25.71	25.54	
CA_26A-41C	LTE B26	10	26740	619	QPSK	1	49	8740	864	LTE B41	20	40620	2593	LTE B41	20	40422	2573.2	-	-	-	25.58	25.52	
CA_25A-26A-41C	LTE B26	3	26865	631.6	QPSK	1	7	8865	876.5	LTE B25	20	8365	1962.5	LTE B41	20	40620	2593	LTE B41	20	40422	2573.2	25.71	25.54

1.3.7 LTE Band 66 as PCC

Table 7
Maximum Output Powers

Combination	PCB Band	PCB BW [MHz]	PCC			SCC 1			SCC 2			SCC 3			SCC 4			SCC 5			LTE Tx Power (dBm)	Power
			PCC (CA) [MHz]	PCC (UL) Freq. [MHz]	PCC (DL) Freq. [MHz]	SCC 1 (CA) [MHz]	SCC 1 (UL) Freq. [MHz]	SCC 1 (DL) Freq. [MHz]	SCC 2 (CA) [MHz]	SCC 2 (UL) Freq. [MHz]	SCC 2 (DL) Freq. [MHz]	SCC 3 (CA) [MHz]	SCC 3 (UL) Freq. [MHz]	SCC 3 (DL) Freq. [MHz]	SCC 4 (CA) [MHz]	SCC 4 (UL) Freq. [MHz]	SCC 4 (DL) Freq. [MHz]	SCC 5 (CA) [MHz]	SCC 5 (UL) Freq. [MHz]	SCC 5 (DL) Freq. [MHz]		
CA 2A-26A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	-	-	-	-	-	-	-	25.48	25.48
CA 12A-66A (1)	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B12	10	505	737.5	-	-	-	-	-	-	-	25.48	25.48
CA 12A-66A (2)	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	-	-	-	-	-	-	-	25.48	25.48
CA 69A-80A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	8738	2151.2	LTE-B36	20	8738	2150	-	-	-	25.48	25.48
CA 69A-80A (2)	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	8738	2151.2	LTE-B36	20	8738	2150	-	-	-	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK	1	12	68786	2145	LTE-B36	20	900	1950	LTE-B2	20	1400	LTE-B71	20	48781	634.5	25.48	25.48
CA 2A-26A-67A-71A	LTE-B36	S	15322	1745	QPSK																	

1.3.8 LTE Band 25 as PCC

Table 8
Maximum Output Powers

Combination	PCC										SCC1				SCC2				SCC3				SCC4				Power	
	PCC Band	PCC BW [MHz]	PCC (CA) Freq. [MHz]	QPSK	PCC UL RB	PCC UL RB Offset	PCC (CA) Channel	PCC (CA) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (CA) Channel	SCC (CA) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (CA) Channel	SCC (CA) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (CA) Channel	SCC (CA) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (CA) Channel	SCC (CA) Freq. [MHz]	LTE Tx Power with CA Enabled [dBm]	LTE Single Carrier Tx Power [dBm]		
CA SA-25A	LTE B20	5	26665	-	QPSK	1	12	8665	1902.5	LTE B5	10	2520	881.5	-	-	-	-	-	-	-	-	-	-	-	-	24.8	24.8	
CA 12A-25A	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B12	10	5005	737.5	-	-	-	-	-	-	-	-	-	-	-	-	26.44	24.32	
CA 25A-25A-25A	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	1940	LTE B26	5	8865	876.5	-	-	-	-	-	-	-	-	-	24.18	24.92
CA 25A-25A-14A	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	-	-	-	-	-	-	-	-	-	-	24.36	24.32
CA 25A-25A-14A	LTE B20	5	26665	1881.5	QPSK	1	7	8055	1931.5	LTE B20	15	8865	876.5	LTE B41	20	40020	2593	-	-	-	-	-	-	-	-	23.25	24.83	
CA 25A-24C	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	-	-	-	24.23	24.83	
CA 25A-24A-1C	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-24A-1C	LTE B20	5	26665	1881.5	QPSK	1	7	8055	1931.5	LTE B20	15	8865	876.5	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	23.28	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23.38	24.83	
CA 25A-25A-10	LTE B20	5	26665	1912.5	QPSK	1	12	8665	1902.5	LTE B20	20	8140	LTE B41	20	40020	2593	LTE B41	20	40020	2593	-	-	-	-	-	23		

FCC ID: A3LSMF707U	 PCTEST Proud to be part of  SAMSUNG	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 5 of 11		

1.3.9 LTE Band 30 as PCC

Table 9
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC							SCC 1			SCC 2			SCC 3			SCC 4			Power					
			PCC [UL] Ch	PCC [UL] Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC [DL] Channel	PCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-2A-2A-30A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B29	10	9715	722.5	-	-	-	-	23.12	23.41
CA_2A-2A-30A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B29	10	9715	722.5	LTE B66	20	66786	2145	-	-	-	-	22.95	23.41
CA_2A-30A-66A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B29	10	9715	722.5	LTE B66	20	66786	2145	LTE B66	20	67236	2190	-	-	-	-	22.95	23.41
CA_2A-2A-30A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B5	10	2525	881.5	LTE B66	20	66786	2145	23.14	23.41
CA_2A-2A-12A-30A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B12	10	5095	737.5	LTE B66	20	66786	2145	23.08	23.41
CA_2A-3A-1A-30A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B2	20	700	1940	LTE B14	10	5350	763	LTE B66	20	66786	2145	22.94	23.41
CA_2A-3A-30A-66A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B5	10	2525	881.5	LTE B66	20	66786	2145	LTE B66	20	67236	2190	23.29	23.41
CA_2A-5B-30A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B5	10	2525	881.5	LTE B5	5	2453	874.3	LTE B66	20	66786	2145	22.99	23.41
CA_2A-12A-30A-66A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B12	10	5095	737.5	LTE B66	20	66786	2145	LTE B66	20	67236	2190	23.11	23.41
CA_2A-1A-30A-66A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B2	20	900	1960	LTE B14	10	5350	763	LTE B66	20	66786	2145	LTE B66	20	67236	2190	23.05	23.41
CA_6B-30A-66A-66A	LTE B30	10	27710	2310	QPSK	1	49	9820	2355	LTE B5	10	2525	881.5	LTE B5	5	2453	874.3	LTE B66	20	66786	2145	LTE B66	20	67236	2190	23.15	23.41

1.3.10 LTE Band 41 as PCC

Table 10
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC [UL] Ch	PCC				SCC 1				SCC 2				SCC 3				SCC 4				Power			
				PCC [UL] Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC [DL] Channel	PCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 41A-41A (1)	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	39750	2506	-	-	-	-	-	-	-	-	-	-	-	-	24.43	24.48
CA 41A-41C	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	39948	2525.8	LTE B41	20	39750	2506	-	-	-	-	-	-	-	-	24.47	24.48
CA 41C-41A	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	41292	2600.2	LTE B41	20	39948	2525.8	-	-	-	-	-	-	-	-	24.46	24.48
CA 41A-41D	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	40146	2545.6	LTE B41	20	39948	2525.8	LTE B41	20	39750	2506	-	-	-	-	24.53	24.48
CA 41D-41A	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	41292	2600.2	LTE B41	20	41094	2640.4	LTE B41	20	39750	2506	-	-	-	-	24.49	24.48
CA 41C-41C	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	41292	2600.2	LTE B41	20	39948	2525.8	LTE B41	20	39750	2506	-	-	-	-	24.51	24.48
CA 41E	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	41292	2600.2	LTE B41	20	41094	2640.4	LTE B41	20	40956	2603.6	-	-	-	-	24.53	24.48
CA 41C-41D	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	41292	2600.2	LTE B41	20	40246	2545.6	LTE B41	20	39948	2525.8	LTE B41	20	39750	2506	24.37	24.48
CA 41D-41C	LTE B41	20	41490	2680	QPSK	1	50	41490	2680	LTE B41	20	41292	2600.2	LTE B41	20	41094	2640.4	LTE B41	20	39948	2525.8	LTE B41	20	39750	2506	24.40	24.48

1.3.11 LTE Band 48 as PCC

Table 11
Maximum Output Powers

	PCC										SCC 1				SCC 2				SCC 3				SCC 4				Power	
Combination	PCC Band	PCC BW [MHz]	PCC [UL] Ch.	PCC [UL] Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC [DL] Channel	PCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC [DL] Channel	SCC [DL] Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)	
CA_48A-48A	LTE B48	15	55310	3557.5	QPSK	1	36	55310	3557.5	LTE B48	20	55640	3690	-	-	-	-	-	-	-	-	-	-	-	-	23.51	23.58	
CA_48A-48C	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55640	3690	LTE B48	20	55642	3670.2	-	-	-	-	-	-	-	-	23.60	23.58	
CA_48C-48A	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55640	3690	LTE B48	20	55640	3690	-	-	-	-	-	-	-	-	23.59	23.58	
CA_48A-48D	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55640	3690	LTE B48	20	55642	3670.2	LTE B48	20	55244	3650.4	-	-	-	-	23.32	23.58	
CA_48D-48A	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55640	3674.6	LTE B48	20	55640	3690.4	LTE B48	20	55640	3690	-	-	-	-	23.68	23.58	
CA_48C-48C	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55640	3674.6	LTE B48	20	55640	3674.6	LTE B48	20	55244	3650.4	-	-	-	-	23.57	23.58	
CA_48E	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55646	3674.6	LTE B48	20	55638	3694.4	LTE B48	20	55682	3614.2	-	-	-	-	23.55	23.58	
CA_48C-48D	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55646	3674.6	LTE B48	20	55638	3690	LTE B48	20	55642	3670.2	LTE B48	20	55644	3650.4	23.26	23.58	
CA_48D-48C	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55646	3674.6	LTE B48	20	55638	3594.4	-	-	-	-	-	-	-	-	23.65	23.58	
CA_48F	LTE B48	15	55315	3557.5	QPSK	1	36	55315	3557.5	LTE B48	20	55646	3674.6	LTE B48	20	55638	3694.4	LTE B48	20	55682	3614.2	-	-	-	-	23.38	23.58	

1.4 DL CA with DL 4x4 MIMO RF Conduction Powers

This device supports downlink 4x4 MIMO operations for some LTE bands. Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Section 1.2 were applied.

Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

FCC ID: A3LSMF707U		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX F: Page 6 of 11

1.4.1 LTE 4x4 MIMO DL Standalone Powers

Table 12
Maximum Output Powers

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]
66	5	132322	1745	QPSK	1	12	25.26	25.46
25	3	26055	1851.5	QPSK	1	7	24.31	24.33
30	10	27710	2310	QPSK	1	49	23.48	23.41
41	20	41490	2680	QPSK	1	50	24.55	24.48
48	15	55315	3557.5	QPSK	1	36	23.54	23.58

FCC ID: A3LSMF707U	 PCTEST Provided to the public by the FCC	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX F: Page 7 of 11

1.4.2 LTE Band 66 as PCC

Table 13
Maximum Output Powers

[illegible]

FCC ID: A3LSMF707U	  	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 8 of 11

1.4.3 LTE Band 25 as PCC


Table 14
Maximum Output Powers

Combination	PCB Band	PCB BW [MHz]	PCB Freq. [MHz]	PCC		PCC (U) Freq. [MHz]	PCC (L) RB	PCC (L) RB Offset	SSC 1				SSC 2				SSC 3				SSC 4				Power									
				Mod.	QPSK				PCC (U) Ch.	PCC (L) Ch.	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	SSC Band	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	SSC Band	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	SSC Band	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	LTE P-Awter with CA Enabled	LTE Single Carrier Power (dBm)			
CA 5A (25A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	10	2025	885.5	2x2	SSC Band	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	SSC Band	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	SSC Band	SSC BW [MHz]	SSC (U) Ch.	SSC (L) Freq. [MHz]	SSC (L) Ch.	LTE P-Awter with CA Enabled	LTE Single Carrier Power (dBm)		
CA 125A(25A-20A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	2x2	LTE B20	5	8865	876.5	2x2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 20A(25A-20A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	2x2	LTE B20	20	8140	1940	4x4	LTE B20	5	8865	876.5	2x2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 150A(25A-20A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B20	5	8865	876.5	2x2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 150A(25A-10A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	2x2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	2x2	LTE B20	20	8140	1940	2x2	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	2x2	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12	8665	1920.5	4x4	LTE B20	20	8140	1940	4x4	LTE B41	20	40020	2593	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CA 25A(25A-41A)	LTE B20	5	26665	1921.5	QPSK	1	12																											

1.4.4 LTE Band 30 as PCC

Table 15
Maximum Output Powers

[illegible]

FCC ID: A3LSMF070U	 PCTEST Proud to be part of QUALCOMM	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 9 of 11		

1.4.5 LTE Band 41 as PCC

Table 16
Maximum Output Powers

Combination	PCB Band	PCC				SSC 1				SSC 2				SSC 3				SSC 4				Power					
		PCB BW [MHz]	PCC [ULB Ch.]	PCC (UL) Freq. [MHz]	Mod.	SSC1BW RB	PCC [ULB Ch.]	PCC (DL) Freq. [MHz]	DL Ant. Config.	SSC Band	SSC BW [MHz]	SSC [DL Ch.]	SSC (DL) Freq. [MHz]	DL Ant. Config.	SSC Band	SSC BW [MHz]	SSC [DL Ch.]	SSC (DL) Freq. [MHz]	DL Ant. Config.	SSC Band	SSC BW [MHz]	SSC [DL Ch.]	SSC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx Power with EnBdCA	LTE Single Carrier Tx Power	
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	-	-	-	-	-	24.25	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	-	24.26	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	-	-	-	-	-	24.25	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39948	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	24.45	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	39948	2525.8	4x4	-	-	-	-	-	-	-	-	-	-	-	24.46	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	-	-	-	-	-	24.25	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	-	24.29	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	41280	2680	2x2	-	-	-	-	-	-	-	-	-	-	-	24.29	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	24.68	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	24.68	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39948	2525.8	2x2	LTE B41	20	39948	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	24.52	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	41280	2680	2x2	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.61	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	41280	2680	2x2	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.64	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.72	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.72	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	2x2	LTE B41	20	41280	2680	2x2	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	24.66	24.48
CA #1A1(4)A1(1)	LTE B41	20	41280	2680	QPSK	1	41280	2680	4x4	LTE B41	20	41280	2680	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4			

1.4.6 LTE Band 48 as PCC

Table 17
Maximum Output Powers

Combination	PCB Band	PCB Power [mW]	PCC (U) [MHz]	PCC (U) Freq. [MHz]	Mod.	PCC UL RB	PCC (U) RB	PCC (U) Freq. [MHz]	DL Ant. Config.	SSC 1				SSC 2				SSC 3				SSC 4				Power	
										SSC Band	SSC Power [mW]	SSC (D) Freq. [MHz]	DL Ant. Config.	SSC Band	SSC Power [mW]	SSC (D) Freq. [MHz]	DL Ant. Config.	SSC Band	SSC Power [mW]	SSC (D) Freq. [MHz]	DL Ant. Config.	SSC Band	SSC Power [mW]	SSC (D) Freq. [MHz]	DL Ant. Config.	LTE Tx Power [dBm]	LTE Single Carrier Tx Power [dBm]
CA 44A-48A)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48A-48A)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	4x4	LTE B4B	20	55640	3690	2x2	-	-	-	-	-	-	-	-	-	-	-	
CA 44A-48A)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	4x4	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48A-48A)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	2x2	LTE B4B	20	55642	3670.2	2x2	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-	-	
CA 48C-48C)	LTE B4B	15	55315	3557.5	QPSK	1	36	55315	3557.5	2x2	LTE B4B	20	55640	3690	4x4	-	-	-	-	-	-	-	-	-	-</		

1.5 Downlink Carrier Aggregation with Uplink Carrier Aggregation enabled

This device supports uplink carrier aggregation (ULCA) with additional Carrier Aggregation configurations active in the downlink. Power measurements were performed with ULCA active and additional CA configurations active in the downlink for the configuration per Fall 2017 TCB Workshop Notes.

Per FCC Guidance, additional SAR measurements for these configurations were not required since their maximum output power was not more than 0.25 dB higher than the maximum output power for with only ULCA active.

FCC ID: A3LSMF707U	  	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 10 of 11

1.5.1 DL Carrier Aggregation RF Conducted Powers

Table 18
Maximum Output Powers

Combination	PCC										SCC 1										SCC 2										SCC 3										SCC 4										Power	
	PCC Band	PCC BW [MHz]	PCC (LA) Ch	PCC (LA) Freq [MHz]	Mod.	PCC User RB	PCC US RB Offset	PCC (DL) Channel	PCC (DL) Freq [MHz]	SCC Band	SCC BW [MHz]	Mod.	SCC User RB	SCC US RB Offset	SCC (UL) Channel	SCC (UL) Freq [MHz]	SCC Band	SCC BW [MHz]	Mod.	SCC (DL) Channel	SCC (DL) Freq [MHz]	SCC Band	SCC BW [MHz]	Mod.	SCC (DL) Channel	SCC (DL) Freq [MHz]	SCC Band	SCC BW [MHz]	Mod.	SCC (DL) Channel	SCC (DL) Freq [MHz]	SCC Band	SCC BW [MHz]	Mod.	SCC (DL) Channel	SCC (DL) Freq [MHz]	TX Power (dBm)	TX Power (dBm)														
CA_41E_41A	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41D_41C	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41D_41A	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41E_41A	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41E_41C	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41E_41D	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41E_41E	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41A_41A	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41A_41C	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41A_41D	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														
CA_41A_41E	1.1E B41	20	41450	2680	QPSK	1	0	41450	2680	1.1E B41	20	QPSK	1	99	41260	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	1.1E B41	20	QPSK	2660.2	24.45	24.45														

1.5.2 DL Carrier Aggregation with DL 4x4 MIMO RF Conducted Powers

Note: 4x4 DL MIMO is only operating in the downlink. Uplink transmission is limited to a single output stream for each component carrier of ULCA.

Table 19
Maximum Output Powers

PCC															SCC 1										Power			
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL/RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (UL) Ch.	SCC (UL) Freq. [MHz]	Mod.	SCC UL/RB	SCC UL RB Offset	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	ULCA Tx Power with add'l CA config.	ULCA Tx Power (dBm)						
CA {B6B}	LTE B66	10	132322	1745	QPSK	1	0	66786	2145	4x4	LTE B66	10	132223	1735.1	QPSK	1	99	66687	2135.1	4x4		25.35	25.35					
CA {B6C}	LTE B66	20	132322	1745	QPSK	1	0	66786	2145	4x4	LTE B66	20	132124	1725.2	QPSK	1	99	66588	2125.2	4x4		25.50	25.50					
PCC																												
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL/RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (UL) Ch.	SCC (UL) Freq. [MHz]	Mod.	SCC UL/RB	SCC UL RB Offset	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	ULCA Tx Power with add'l CA config.	ULCA Tx Power (dBm)						
CA {H41}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H41-H43}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	2x2	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	2x2	LTE B41	20	41710	2700	4x4		24.81	24.88
CA {H43-H44}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H43-H45}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H45}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H45-H46}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H46-H47}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H47-H48}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H48-H49}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H49-H50}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H49-H51}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H51}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H51-H52}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H52-H53}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H53-H54}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H54-H55}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H55-H56}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H56-H57}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H57-H58}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H58-H59}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H59-H60}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H60-H61}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H61-H62}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H62-H63}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H63-H64}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H64-H65}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H65-H66}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H66-H67}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H67-H68}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H68-H69}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H69-H70}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H70-H71}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H71-H72}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H72-H73}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H73-H74}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H74-H75}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H75-H76}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H76-H77}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H77-H78}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H78-H79}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H79-H80}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H80-H81}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H81-H82}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H82-H83}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H83-H84}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H84-H85}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H85-H86}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H86-H87}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H87-H88}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H88-H89}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H89-H90}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H90-H91}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H91-H92}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H92-H93}	LTE B41	20	41490	2680	QPSK	1	0	41490	2680	4x4	LTE B41	20	41290	2660.2	QPSK	1	99	41290	2660.2	4x4		24.90	24.90					
CA {H93-H94}	LTE B41	20	41490	2680	QPSK																							

FCC ID: A3LSMF707U	  	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX F: Page 11 of 11

APPENDIX G POWER REDUCTION VERIFICATION

Per the May 2017 TCBC Workshop Notes, demonstration of proper functioning of the power reduction mechanisms is required to support the corresponding SAR configurations. The verification process was divided into two parts: (1) evaluation of output power levels for individual or multiple triggering mechanisms and (2) evaluation of the triggering distances for proximity-based sensors.

G.1 Power Verification Procedure

The power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and the output power was monitored. The power measurements were confirmed to be within expected tolerances for all states before and after a power reduction mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Steps 1 and 2 were repeated for all individual power reduction mechanisms and combinations thereof. For the combination cases, one mechanism was switched to a 'triggered' state at a time; powers were confirmed to be within tolerances after each additional mechanism was activated.

G.2 Distance Verification Procedure

The distance verification procedure was performed according to the following procedure:

1. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
2. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 and FCC Guidance. Each applicable test position was evaluated. The distances were confirmed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
3. Steps 1 and 2 were repeated for low, mid, and high bands, as appropriate (see note below Table G-2 for more details).
4. Steps 1 through 3 were repeated for all distance-based power reduction mechanisms.

FCC ID: A3LSMF707U	 PCTEST ENGINEERING CORPORATION, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX G: Page 1 of 5

G.3 Main Antenna Verification Summary

Table G-1
Power Measurement Verification for Main Antenna

Mechanism(s)			Mode/Band	Conducted Power (dBm)			
1st	2nd	3rd		Un-triggered (Max)	Mechanism #1 (Reduced)	Mechanism #2 (Reduced)	Mechanism #3 (Reduced)
Grip			GPRS 1900 3 Tx Slot	27.24	23.70		
Hotspot On			GPRS 1900 3 Tx Slot	27.31	23.69		
Hotspot On	Grip		GPRS 1900 3 Tx Slot	27.35	23.67	23.64	
Grip	Hotspot On		GPRS 1900 3 Tx Slot	27.28	23.68	23.67	
Grip			UMTS 1750	24.57	19.95		
Hotspot On			UMTS 1750	24.62	19.90		
Hotspot On	Grip		UMTS 1750	24.60	19.91	20.00	
Grip	Hotspot On		UMTS 1750	24.55	19.96	19.97	
Grip			UMTS 1900	25.26	19.50		
Hotspot On			UMTS 1900	25.00	19.43		
Hotspot On	Grip		UMTS 1900	24.98	19.41	19.41	
Grip	Hotspot On		UMTS 1900	25.27	19.49	19.49	
Grip			PCS EVDO	24.44	19.10		
Hotspot On			PCS EVDO	24.21	19.13		
Hotspot On	Grip		PCS EVDO	24.36	19.16	19.12	
Grip	Hotspot On		PCS EVDO	24.40	19.10	19.12	
Grip			LTE FDD Band 4	24.33	18.92		
Hotspot On			LTE FDD Band 4	24.45	19.00		
Hotspot On	Grip		LTE FDD Band 4	24.44	19.00	18.94	
Grip	Hotspot On		LTE FDD Band 4	24.46	18.92	18.95	
Grip			LTE FDD Band 66	24.48	18.82		
Hotspot On			LTE FDD Band 66	24.43	18.85		
Hotspot On	Grip		LTE FDD Band 66	24.47	18.84	18.83	
Grip	Hotspot On		LTE FDD Band 66	24.44	18.82	18.82	
Grip			LTE FDD Band 2	24.33	18.28		
Hotspot On			LTE FDD Band 2	24.30	18.31		
Hotspot On	Grip		LTE FDD Band 2	24.32	18.30	18.30	
Grip	Hotspot On		LTE FDD Band 2	24.29	18.31	18.29	
Grip			LTE FDD Band 25	24.66	17.67		
Hotspot On			LTE FDD Band 25	24.64	17.64		
Hotspot On	Grip		LTE FDD Band 25	24.69	17.66	17.64	
Grip	Hotspot On		LTE FDD Band 25	24.61	17.67	17.63	
Grip			LTE FDD Band 30	23.11	20.05		
Hotspot On			LTE FDD Band 30	23.11	20.15		
Hotspot On	Grip		LTE FDD Band 30	23.09	20.12	20.09	
Grip	Hotspot On		LTE FDD Band 30	23.07	20.05	20.14	
Grip			LTE FDD Band 7	23.72	18.24		
Hotspot On			LTE FDD Band 7	23.76	18.26		
Hotspot On	Grip		LTE FDD Band 7	23.74	18.26	18.28	
Grip	Hotspot On		LTE FDD Band 7	23.70	18.24	18.28	
Grip			LTE TDD Band 41 (PC3)	24.60	19.73		
Hotspot On			LTE TDD Band 41 (PC3)	24.61	19.85		
Hotspot On	Grip		LTE TDD Band 41 (PC3)	24.62	19.82	19.84	
Grip	Hotspot On		LTE TDD Band 41 (PC3)	24.66	19.73	19.78	
Grip			LTE TDD Band 41 (PC2)	25.74	21.62		
Hotspot On			LTE TDD Band 41 (PC2)	25.73	21.58		
Hotspot On	Grip		LTE TDD Band 41 (PC2)	25.83	21.59	21.63	
Grip	Hotspot On		LTE TDD Band 41 (PC2)	25.75	21.62	21.62	
Grip			LTE TDD Band 38	24.96	20.66		
Hotspot On			LTE TDD Band 38	24.97	20.66		
Hotspot On	Grip		LTE TDD Band 38	24.94	20.66	20.68	
Grip	Hotspot On		LTE TDD Band 38	24.98	20.65	20.67	
Held-to-Ear			LTE TDD Band 48	22.52	15.04		
Grip			NR FDD Band 2	23.61	17.75		
Hotspot On			NR FDD Band 2	23.61	17.65		
Hotspot On	Grip		NR FDD Band 2	23.61	17.72	17.68	
Grip	Hotspot On		NR FDD Band 2	23.61	17.74	17.69	
Grip			NR FDD Band 25	23.63	17.72		
Hotspot On			NR FDD Band 25	23.63	17.71		
Hotspot On	Grip		NR FDD Band 25	23.63	17.76	17.72	
Grip	Hotspot On		NR FDD Band 25	23.63	17.73	17.68	
Grip			NR FDD Band 66	23.74	19.27		
Hotspot On			NR FDD Band 66	23.74	19.2		
Hotspot On	Grip		NR FDD Band 66	23.74	19.28	19.24	
Grip	Hotspot On		NR FDD Band 66	23.74	19.23	19.21	
Held-to-Ear			NR TDD Band 41	24.17	20.14		

FCC ID: A3LSMF707U	 PCTEST ENGINEERING CORPORATION, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX G: Page 2 of 5

Table G-2
Distance Measurement Verification for Main Antenna

Mechanism(s)	Test Condition	Band	Distance Measurements (mm)		Minimum Distance per Manufacturer (mm)
			Moving Toward	Moving Away	
Grip	Phablet - Back Side	Mid	11	13	9
Grip	Phablet - Back Side	High	11	13	9
Grip	Phablet - Front Side	Mid	10	11	8
Grip	Phablet - Front Side	High	10	11	8
Grip	Phablet - Bottom Edge	Mid	14	15	14
Grip	Phablet - Bottom Edge	High	14	15	14

*Note: Mid band refers to: CDMA BC1, GSM1900, UMTS B2/4, LTE B2/4/25/66, NR Band n2/25/66; High band refers to: LTE B7/30/38/41 PC3 and PC2

G.4 WIFI Verification Summary

Table G-3
Power Measurement Verification WIFI – Antenna 1

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
		Un-triggered (Max)	Mechanism #1 (Reduced)
1st			
Held-to-Ear	802.11b	17.83	10.69
Held-to-Ear	802.11g	16.17	10.76
Held-to-Ear	802.11n (2.4GHz)	16.04	10.78
Held-to-Ear	802.11a	15.81	9.76
Held-to-Ear	802.11n (5GHz, 20MHz BW)	15.58	9.75
Held-to-Ear	802.11ac (20MHz BW)	15.38	9.71
Held-to-Ear	802.11n (5GHz, 40MHz BW)	15.25	9.80
Held-to-Ear	802.11ac (40MHz BW)	15.73	9.95
Held-to-Ear	802.11ac (80MHz BW)	14.78	9.81

*Note: MIMO and 802.11ax WIFI modes were not evaluated due to equipment limitations.

FCC ID: A3LSMF707U	 PCTEST ENGINEERING CORPORATION, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX G: Page 3 of 5

Table G-4
Power Measurement Verification WIFI – Antenna 2

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
1st		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	802.11b	17.59	12.91
Held-to-Ear	802.11g	17.24	11.87
Held-to-Ear	802.11n (2.4GHz)	16.88	11.89
Held-to-Ear	802.11a	15.97	9.66
Held-to-Ear	802.11n (5GHz, 20MHz BW)	15.99	9.93
Held-to-Ear	802.11ac (20MHz BW)	16.09	9.80
Held-to-Ear	802.11n (5GHz, 40MHz BW)	15.37	9.70
Held-to-Ear	802.11ac (40MHz BW)	15.99	9.74
Held-to-Ear	802.11ac (80MHz BW)	14.99	9.93

*Note: MIMO and 802.11ax WIFI modes were not evaluated due to equipment limitations.

Table G-5
Power Measurement Verification WIFI with NR Active – Antenna 1

Mechanism(s)		Mode/Band	Conducted Power (dBm)		
#1	#2		Un-triggered (Max)	Mechanism #1 NR Active (Reduced)	Mechanism #2 RCV and NR Active (Reduced)
NR Active	RSDB + RCV	802.11b	18.10	14.90	12.23
	RSDB + RCV	802.11g	17.10	14.10	11.97
	RSDB + RCV	802.11n (2.4GHz)	17.10	13.90	12.00
	RSDB + RCV	802.11a	15.90	13.00	9.06
	RSDB + RCV	802.11n (5GHz, 20MHz BW)	15.90	13.00	9.30
	RSDB + RCV	802.11ac (20MHz BW)	16.00	13.00	9.24
	RSDB + RCV	802.11n (5GHz, 40MHz BW)	14.80	11.70	9.11
	RSDB + RCV	802.11ac (40MHz BW)	15.00	11.70	8.90
	RSDB + RCV	802.11ac (80MHz BW)	13.60	10.60	8.87

*Note: MIMO and 802.11ax WIFI modes were not evaluated due to equipment limitations.

FCC ID: A3LSMF707U	 PCTEST ENGINEERING CORPORATION, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX G: Page 4 of 5

Table G-6
Power Measurement Verification WIFI with NR Active – Antenna 2

Mechanism(s)		Mode/Band	Conducted Power (dBm)		
#1	#2		Un-triggered (Max)	Mechanism #1 NR Active (Reduced)	Mechanism #2 RCV and NR Active (Reduced)
NR Active	RSDB + RCV	802.11b	17.48	14.86	11.98
	RSDB + RCV	802.11g	17.30	14.20	12.48
	RSDB + RCV	802.11n (2.4GHz)	17.30	14.10	12.28
	RSDB + RCV	802.11a	16.00	12.80	9.40
	RSDB + RCV	802.11n (5GHz, 20MHz BW)	15.80	12.90	9.22
	RSDB + RCV	802.11ac (20MHz BW)	16.00	13.00	9.35
	RSDB + RCV	802.11n (5GHz, 40MHz BW)	15.20	12.20	9.47
	RSDB + RCV	802.11ac (40MHz BW)	15.30	12.20	9.19
	RSDB + RCV	802.11ac (80MHz BW)	13.70	11.16	9.25

*Note: MIMO and 802.11ax WIFI modes were not evaluated due to equipment limitations.

Table G-7
Power Measurement Verification Bluetooth – Antenna 1

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
1st		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	Bluetooth	14	12.1

Table G-8
Power Measurement Verification Bluetooth – Antenna 2

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
1st		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	Bluetooth	14	11.8

FCC ID: A3LSMF707U	 PCTEST ENGINEERING CORPORATION, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset			APPENDIX G: Page 5 of 5

APPENDIX H: IEEE 802.11AX RU SAR EXCLUSION

1.1 IEEE 802.11ax RU SAR Exclusion

To make the most efficient use of the additional available subcarriers (data tones), IEEE 802.11ax can utilize Orthogonal Frequency-Division Multiple Access (OFDMA) which divides the existing 802.11 channels into smaller subchannels called Resource Units (RUs). Possible RU sizes are: 26T, 52T, 106T, 242T, 484T and 996T.

Per FCC Guidance, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values. Per FCC Guidance, maximum conducted powers were performed for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes.

1.2 IEEE 802.11ax RU Target Powers

1.2.1 Maximum 802.11ax RU WLAN Output Power

Tones		SISO (ANT1/2) /in dBm				MIMO (ALL) /in dBm			
		2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz	2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz
26T	Maximum	15	12	12	12	18	12.5	12.5	12.5
	Nominal	14	11	11	11	17	11.5	11.5	11.5
52T	Maximum	16	13.5	13.5	13.5	19	15.5	15.5	15.5
	Nominal	15	12.5	12.5	12.5	18	14.5	14.5	14.5
106T	Maximum	16.5	15.5	15.5	15.5	19.5	18	18	18
	Nominal	15.5	14.5	14.5	14.5	18.5	17	17	17
242T	Maximum	17.5	16.5	16.5	16.5	20.5	19.5	19.5	19.5
		ch. 1: 17.0 ch. 10: 17.0 ch. 11: 13.5		ch. 38: 15.0 ch. 62: 14.0 ch. 102: 14.0	ch. 42: 14.5 ch. 58: 12.5 ch. 106: 14.0	ch. 1: 20.0 ch. 10: 20.0 ch. 11: 16.5		ch. 38: 18.0 ch. 62: 17.0 ch. 102: 17.0	ch. 42: 17.5 ch. 58: 15.5 ch. 106: 17.0
		16.5	15.5	15.5	15.5	19.5	18.5	18.5	18.5
	Nominal	ch. 1: 16.0 ch. 10: 16.0 ch. 11: 12.5		ch. 38: 14.0 ch. 62: 13.0 ch. 102: 13.0	ch. 42: 13.5 ch. 58: 11.5 ch. 106: 13.0	ch. 1: 19.0 ch. 10: 19.0 ch. 11: 15.5		ch. 38: 17.0 ch. 62: 16.0 ch. 102: 16.0	ch. 42: 16.5 ch. 58: 14.5 ch. 106: 16.0
484T	Maximum			16	16			19	19
				ch. 38: 15.0 ch. 62: 14.0 ch. 102: 14.0	ch. 42: 14.5 ch. 58: 12.5 ch. 106: 14.0			ch. 38: 18.0 ch. 62: 17.0 ch. 102: 17.0	ch. 42: 17.5 ch. 58: 15.5 ch. 106: 17.0
	Nominal			15	15			18	18
				ch. 38: 14.0 ch. 62: 13.0 ch. 102: 13.0	ch. 42: 13.5 ch. 58: 11.5 ch. 106: 13.0			ch. 38: 17.0 ch. 62: 16.0 ch. 102: 16.0	ch. 42: 16.5 ch. 58: 14.5 ch. 106: 16.0
996T	Maximum				15				18
					ch. 42: 14.5 ch. 58: 12.5 ch. 106: 14.0				ch. 42: 17.5 ch. 58: 15.5 ch. 106: 17.0
	Nominal				14				17
					ch. 42: 13.5 ch. 58: 11.5 ch. 106: 13.0				ch. 42: 16.5 ch. 58: 14.5 ch. 106: 16.0

FCC ID: A3LSMF707U	 SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset		APPENDIX H: Page 1 of 8

1.2.2 Reduced 802.11ax RU WLAN Output Power During Conditions with Simultaneous 2.4 GHz WLAN and 5 GHz WLAN

Tones		SISO (ANT1/2) /in dBm				MIMO (ALL) /in dBm			
		2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz	2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz
26T	Maximum	15	12	12	12	18	12.5	12.5	12.5
	Nominal	14	11	11	11	17	11.5	11.5	11.5
52T	Maximum	15	12	12	12	18	15	15	15
	Nominal	14	11	11	11	17	14	14	14
106T	Maximum	15	12	12	12	18	15	15	15
	Nominal	14	11	11	11	17	14	14	14
242T	Maximum	15	12	12	12	18	15	15	15
		ch. 11: 13.5				ch. 11: 16.5			
	Nominal	14	11	11	11	17	14	14	14
		ch. 11: 12.5				ch. 11: 15.5			
484T	Maximum				12				15
	Nominal				11				14
996T	Maximum				12				15
	Nominal				11				14

1.2.3 Reduced 802.11ax RU WLAN Output Power During Conditions with Receiver Active and Simultaneous 2.4 GHz WLAN and 5 GHz WLAN and/or NR Active

Tones		SISO (ANT1/2) /in dBm				MIMO (ALL) /in dBm			
		2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz	2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz
26T	Maximum	13	10	10	10	16	12.5	12.5	12.5
	Nominal	12	9	9	9	15	11.5	11.5	11.5
52T	Maximum	13	10	10	10	16	13	13	13
	Nominal	12	9	9	9	15	12	12	12
106T	Maximum	13	10	10	10	16	13	13	13
	Nominal	12	9	9	9	15	12	12	12
242T	Maximum	13	10	10	10	16	13	13	13
	Nominal	12	9	9	9	15	12	12	12
484T	Maximum				10				13
	Nominal				9				12
996T	Maximum				10				13
	Nominal				9				12

FCC ID: A3LSMF707U	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 2 of 8

1.3 IEEE 802.11ax Measured Powers

Table 1
Maximum 2.4 GHz 802.11ax RU Output Power – Ant 1

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	26T	0	14.62	2412	1	52T	37	15.61
			4	14.53				38	15.94
			8	14.74				40	15.79
2437	6	26T	0	14.55	2437	6	52T	37	15.80
			4	14.57				38	15.93
			8	14.53				40	15.75
2462	11	26T	0	14.93	2462	11	52T	37	15.93
			4	14.77				38	15.87
			8	14.57				40	15.67

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	106T	53	16.23
			54	16.27
2437	6	106T	53	16.25
			54	16.36
2462	11	106T	53	16.45
			54	16.21

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	242T	61	16.63
2417	2	242T	61	17.19
2437	6	242T	61	17.24
2452	9	242T	61	17.41
2457	10	242T	61	16.81
2462	11	242T	61	13.07

FCC ID: A3LSMF707U	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 3 of 8

Table 2
Maximum 2.4 GHz 802.11ax RU Output Power – Ant 2

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	26T	0	14.81	2412	1	52T	37	15.92
			4	14.98				38	15.88
			8	14.60				40	15.60
2437	6	26T	0	14.70	2437	6	52T	37	15.85
			4	14.56				38	15.56
			8	14.80				40	15.78
2462	11	26T	0	14.77	2462	11	52T	37	15.73
			4	14.67				38	15.77
			8	14.94				40	15.49

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	106T	53	16.33
			54	16.14
2437	6	106T	53	16.18
			54	16.49
2462	11	106T	53	16.48
			54	16.35

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	242T	61	16.75
2417	2	242T	61	17.49
2437	6	242T	61	16.96
2452	9	242T	61	17.45
2457	10	242T	61	16.86
2462	11	242T	61	13.30

FCC ID: A3LSMF707U	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 4 of 8

Table 3
Maximum 5 GHz 802.11ax RU Output Power – Ant 1

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	4	8						37	39	40
	1	5180	36	26T	11.61	11.91	11.83	1	5180	36	52T	12.85	12.88	12.79	
5200		40	26T	11.94	11.69	11.83	5200		40	52T	12.99	12.97	12.94		
5240		48	26T	11.98	11.66	11.63	5240		48	52T	12.95	12.98	12.92		
5260		52	26T	11.87	11.97	11.98	5260		52	52T	12.98	12.99	12.97		
5280		56	26T	11.74	11.99	11.71	5280		56	52T	12.80	12.71	12.79		
2A	5320	64	26T	11.71	11.59	11.92	2A	5320	64	52T	12.98	12.89	12.86		
	5500	100	26T	11.66	11.83	11.62		5500	100	52T	12.89	12.87	12.68		
	5600	120	26T	11.90	11.97	11.94		5600	120	52T	12.98	12.85	12.65		
2C	5720	144	26T	11.94	11.62	11.99	2C	5720	144	52T	12.91	12.96	12.93		
	5745	149	26T	11.96	11.84	11.71		5745	149	52T	12.95	12.76	12.73		
	5785	157	26T	11.84	11.83	11.62		5785	157	52T	12.74	12.86	12.62		
5825	165	26T	11.57	11.98	11.91	5825	165	52T	12.62	12.60	12.57				

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	N/A						61	N/A	N/A
	1	5180	36	106T	14.88	14.73		1	5180	36	242T	15.74			
5200		40	106T	14.62	14.68		5200		40	242T	15.86				
5240		48	106T	14.73	14.66		5240		48	242T	15.77				
2A	5260	52	106T	14.78	14.85		2A	5260	52	242T	15.96				
	5280	56	106T	14.69	14.95			5280	56	242T	15.99				
	5320	64	106T	14.61	14.66			5320	64	242T	15.78				
2C	5500	100	106T	14.70	14.63		2C	5500	100	242T	15.77				
	5600	120	106T	14.97	14.89			5600	120	242T	15.91				
	5720	144	106T	14.79	14.74			5720	144	242T	15.70				
3	5745	149	106T	14.97	14.81		3	5745	149	242T	15.98				
	5785	157	106T	14.74	14.66			5785	157	242T	15.89				
	5825	165	106T	14.69	14.58			5825	165	242T	15.73				

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	8	17						37	40	44
	1	5190	38	26T	11.18	11.39	11.47	1	5190	38	52T	12.57	12.94	12.61	
5230		46	26T	11.48	11.14	11.01	5230		46	52T	12.87	12.72	12.97		
2A	5270	54	26T	11.24	11.26	11.22	2A	5270	54	52T	12.80	12.89	12.86		
	5310	62	26T	11.27	11.46	11.03		5310	62	52T	12.78	12.97	12.73		
2C	5510	102	26T	11.07	11.37	11.34	2C	5510	102	52T	12.87	12.99	12.96		
	5590	118	26T	11.05	11.31	11.13		5590	118	52T	12.98	12.68	12.62		
	5710	142	26T	11.33	11.36	11.19		5710	142	52T	12.83	12.96	12.99		
3	5755	151	26T	11.47	11.16	11.23	3	5755	151	52T	12.73	12.91	12.94		
	5795	159	26T	11.30	11.47	11.45		5795	159	52T	12.90	12.96	12.62		

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	56						61	62	N/A
	1	5190	38	106T	15.08	15.31	15.06	1	5190	38	242T	14.62	14.64		
5230		46	106T	15.36	14.77	15.37	5230		46	242T	16.45	16.46			
2A	5270	54	106T	14.81	14.94	15.30	2A	5270	54	242T	16.43	16.43			
	5310	62	106T	14.78	14.98	15.05		5310	62	242T	13.51	13.40			
2C	5510	102	106T	15.35	15.38	15.12	2C	5510	102	242T	13.54	13.31			
	5590	118	106T	14.61	14.69	15.14		5590	118	242T	16.47	16.38			
	5710	142	106T	15.33	15.37	15.03		5710	142	242T	16.44	16.23			
3	5755	151	106T	15.13	15.19	15.39	3	5755	151	242T	16.33	16.02			
	5795	159	106T	15.34	15.38	15.03		5795	159	242T	16.46	16.47			

FCC ID: A3LSMF707U	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 5 of 8

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	N/A	N/A
	1	5190	38	484T	14.56		
		5230	46	484T	15.47		
	2A	5270	54	484T	15.34		
		5310	62	484T	13.44		
	2C	5510	102	484T	13.42		
		5590	118	484T	15.70		
		5710	142	484T	15.56		
	3	5755	151	484T	15.42		
		5795	159	484T	15.60		
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					0	18	36
	1	5210	42	26T	11.38	11.85	11.55
	2A	5290	58	26T	11.54	11.80	11.43
	2C	5530	106	26T	11.56	11.58	11.36
		5610	122	26T	11.85	11.79	11.38
		5690	138	26T	11.80	11.78	11.51
	3	5775	155	26T	11.79	11.85	11.68
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					37	44	52
	1	5210	42	52T	13.37	13.26	12.99
	2A	5290	58	52T	13.38	13.31	13.36
	2C	5530	106	52T	13.34	13.38	13.24
		5610	122	52T	13.36	13.24	13.27
		5690	138	52T	13.35	13.38	13.02
	3	5775	155	52T	13.35	13.34	13.28
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					61	62	64
	1	5210	42	242T	14.09	14.33	13.95
	2A	5290	58	242T	12.49	12.47	12.10
	2C	5530	106	242T	13.60	13.57	13.82
		5610	122	242T	15.87	15.78	15.71
		5690	138	242T	15.97	15.88	15.92
	3	5775	155	242T	15.98	15.94	15.63
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	66	N/A
	1	5210	42	484T	14.19	14.11	
	2A	5290	58	484T	12.49	12.25	
	2C	5530	106	484T	13.99	13.54	
		5610	122	484T	15.49	15.44	
		5690	138	484T	15.45	15.52	
	3	5775	155	484T	15.39	15.59	
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					67	N/A	N/A
	1	5210	42	996T	14.01		
	2A	5290	58	996T	12.25		
	2C	5530	106	996T	13.67		
		5610	122	996T	14.63		
		5690	138	996T	14.65		
	3	5775	155	996T	14.67		

FCC ID: A3LSMF707U	 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 6 of 8

Table 4
Maximum 5 GHz 802.11ax RU Output Power – Ant 2

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	4	8						37	39	40
	1	5180	36	26T	11.81	11.96	11.91	1	5180	36	52T	12.85	12.89	12.81	
2A	5200	40	26T	11.59	11.91	11.87	5200	40	52T	12.87	12.83	12.80			
	5240	48	26T	11.76	11.68	11.84	5240	48	52T	12.64	12.72	12.61			
	5260	52	26T	11.85	11.97	11.96	5260	52	52T	12.76	12.81	12.73			
2C	5280	56	26T	11.99	11.63	11.99	5280	56	52T	12.85	12.89	12.81			
	5320	64	26T	11.97	11.99	11.98	5320	64	52T	12.86	12.87	12.72			
	5500	100	26T	11.93	11.98	11.89	5500	100	52T	12.84	12.85	12.67			
3	5600	120	26T	11.97	11.98	11.96	5600	120	52T	12.98	12.93	12.81			
	5720	144	26T	11.98	11.99	11.89	5720	144	52T	12.84	12.81	12.66			
	5745	149	26T	11.95	11.81	11.73	5745	149	52T	12.97	12.94	12.95			
5825	157	26T	11.82	11.94	11.90	5825	157	52T	12.73	12.60	12.96				
	5825	165	26T	11.98	11.97	11.94	5825	165	52T	12.95	12.96	12.86			

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	N/A						61	N/A	N/A
	1	5180	36	106T	14.97	14.99		1	5180	36	242T	15.94			
2A	5200	40	106T	14.96	14.95		5200	40	242T	15.96					
	5240	48	106T	14.89	14.87		5240	48	242T	15.79					
	5260	52	106T	14.95	14.92		5260	52	242T	15.92					
2C	5280	56	106T	14.98	14.99		5280	56	242T	15.99					
	5320	64	106T	14.96	14.99		5320	64	242T	15.96					
	5500	100	106T	14.62	14.97		5500	100	242T	15.93					
3	5600	120	106T	14.97	14.93		5600	120	242T	15.97					
	5720	144	106T	14.96	14.98		5720	144	242T	15.92					
	5745	149	106T	14.88	14.76		5745	149	242T	15.98					
5785	157	106T	14.92	14.85		5785	157	242T	15.76						
	5825	165	106T	14.99	14.97		5825	165	242T	15.97					

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	8	17						37	40	44
	1	5190	38	26T	11.43	11.42	11.37	1	5190	38	52T	12.90	12.84	12.80	
2A	5230	46	26T	11.10	11.49	11.11	5230	46	52T	12.72	12.87	12.81			
	5270	54	26T	11.04	11.46	11.49	5270	54	52T	12.95	12.74	12.79			
	5310	62	26T	11.48	11.49	11.08	5310	62	52T	12.97	12.89	12.88			
2C	5510	102	26T	11.46	11.24	11.35	5510	102	52T	12.83	12.99	12.61			
	5590	118	26T	11.26	11.47	11.48	5590	118	52T	12.85	12.98	12.91			
	5710	142	26T	11.17	11.48	11.39	5710	142	52T	12.98	12.86	12.70			
3	5755	151	26T	11.49	11.48	11.28	5755	151	52T	12.59	12.81	12.76			
	5795	159	26T	11.29	11.49	11.06	5795	159	52T	12.72	12.95	12.88			

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	56						61	62	N/A
	1	5190	38	106T	15.16	15.35	15.44	1	5190	38	242T	14.64	14.58		
2A	5230	46	106T	15.27	15.38	15.15	5230	46	242T	16.05	15.98				
	5270	54	106T	15.17	15.37	15.45	5270	54	242T	15.98	15.96				
	5310	62	106T	15.21	15.44	15.23	5310	62	242T	13.75	13.56				
2C	5510	102	106T	15.18	15.29	15.39	5510	102	242T	13.92	13.90				
	5590	118	106T	15.44	15.24	15.17	5590	118	242T	16.15	16.06				
	5710	142	106T	15.42	15.45	15.43	5710	142	242T	15.94	15.88				
3	5755	151	106T	15.31	15.42	15.18	5755	151	242T	15.93	15.87				
	5795	159	106T	15.10	15.18	15.25	5795	159	242T	16.18	16.02				

FCC ID: A3LSMF707U	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 7 of 8

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	N/A	N/A
	1	5190	38	484T	14.58		
		5230	46	484T	15.61		
	2A	5270	54	484T	15.49		
		5310	62	484T	13.68		
	2C	5510	102	484T	13.93		
		5590	118	484T	15.77		
		5710	142	484T	15.63		
	3	5755	151	484T	15.59		
		5795	159	484T	15.77		
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					37	44	52
	1	5210	42	52T	12.94	13.11	12.72
		5290	58	52T	13.12	12.87	12.86
	2C	5530	106	52T	12.92	12.95	12.81
		5610	122	52T	13.01	12.98	12.81
		5690	138	52T	12.92	12.93	12.77
	3	5775	155	52T	12.78	12.80	13.05
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					53	56	60
	1	5210	42	106T	15.06	15.14	14.91
		5290	58	106T	14.88	15.03	15.06
	2C	5530	106	106T	15.02	15.06	14.94
		5610	122	106T	15.06	15.04	14.96
		5690	138	106T	15.13	15.09	15.03
	3	5775	155	106T	14.91	14.96	14.78
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					61	62	64
	1	5210	42	242T	14.31	14.49	14.26
		5290	58	242T	12.29	12.37	11.88
	2A	5530	106	242T	13.65	13.87	13.65
		5610	122	242T	16.39	16.37	16.40
		5690	138	242T	16.34	16.26	16.23
	3	5775	155	242T	16.27	16.18	16.26
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					67	N/A	N/A
	1	5210	42	996T	14.17		
		5290	58	996T	12.01		
	2C	5530	106	996T	13.56		
		5610	122	996T	14.63		
		5690	138	996T	14.64		
	3	5775	155	996T	14.59		

FCC ID: A3LSMF707U	 	Reviewed by: Quality Manager
Test Dates: 05/18/20 – 07/11/20	DUT Type: Portable Handset	APPENDIX H: Page 8 of 8

APPENDIX I: PROBE AND DIPOLE CALIBRATION CERTIFICATES



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1057_Jan18**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1057**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **January 16, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	30-Dec-17 (No. EX3-3503_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** **Leif Klysner** **Laboratory Technician**

Approved by: **Katja Pokovic** **Katja Pokovic** **Technical Manager**

Signature

Issued: January 18, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.2 $\pm$ 6 %	4.55 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.91 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.2 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.8 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.8 ± 6 %	4.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.5 ± 6 %	5.06 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.41 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.36 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.2 ± 6 %	5.48 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.64 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	6.15 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.72 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	6.22 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	50.0 Ω - 5.5 j Ω
Return Loss	- 25.2 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	54.7 Ω - 2.1 j Ω
Return Loss	- 26.2 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	52.7 Ω + 0.0 j Ω
Return Loss	- 31.5 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.3 Ω - 6.7 j Ω
Return Loss	- 23.4 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	48.4 Ω - 3.9 j Ω
Return Loss	- 27.4 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.3 Ω - 1.6 j Ω
Return Loss	- 25.6 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	52.6 Ω + 1.1 j Ω
Return Loss	- 31.2 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	51.8 Ω - 0.4 j Ω
Return Loss	- 34.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions (f=5200 MHz)

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.6 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg $\pm$ 19.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.6 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg $\pm$ 19.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.6 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg $\pm$ 19.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	5.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.7 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	1.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	17.7 W/kg $\pm$ 19.9 % (k=2)

Measurement Conditions (f=5800 MHz)

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.62 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	86.3 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.1 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.88 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	88.9 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.4 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	5.68 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	56.8 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	1.89 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	18.9 W/kg ± 19.9 % (k=2)

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.9$ S/m; $\epsilon_r = 35.8$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)



DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2017, ConvF(5.05, 5.05, 5.05); Calibrated: 30.12.2017, ConvF(4.98, 4.98, 4.98); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601 - modified; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 72.54 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 27.5 W/kg
SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.28 W/kg
Maximum value of SAR (measured) = 17.7 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 72.77 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 32.2 W/kg
SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.4 W/kg
Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 70.93 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 31.4 W/kg
SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.3 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

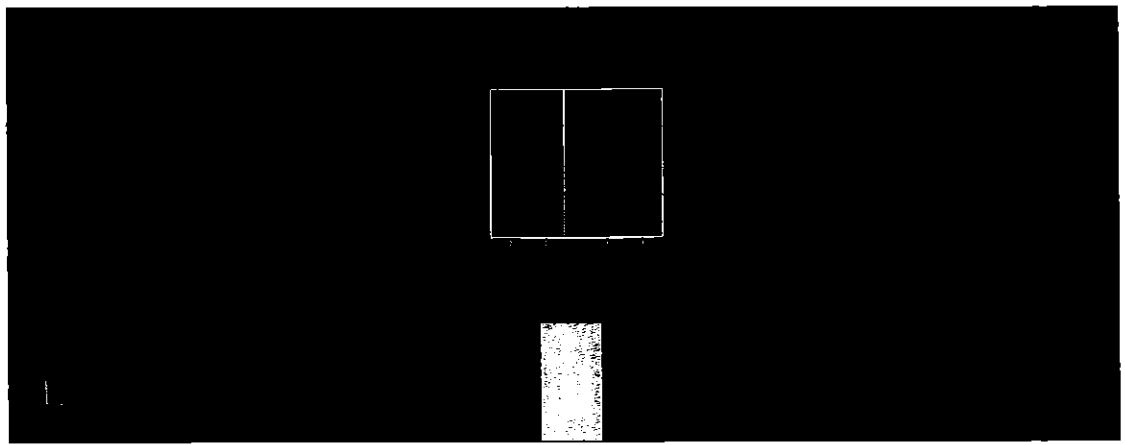

0 dB = 18.9 W/kg = 12.76 dBW/kg

Impedance Measurement Plot for Head TSL

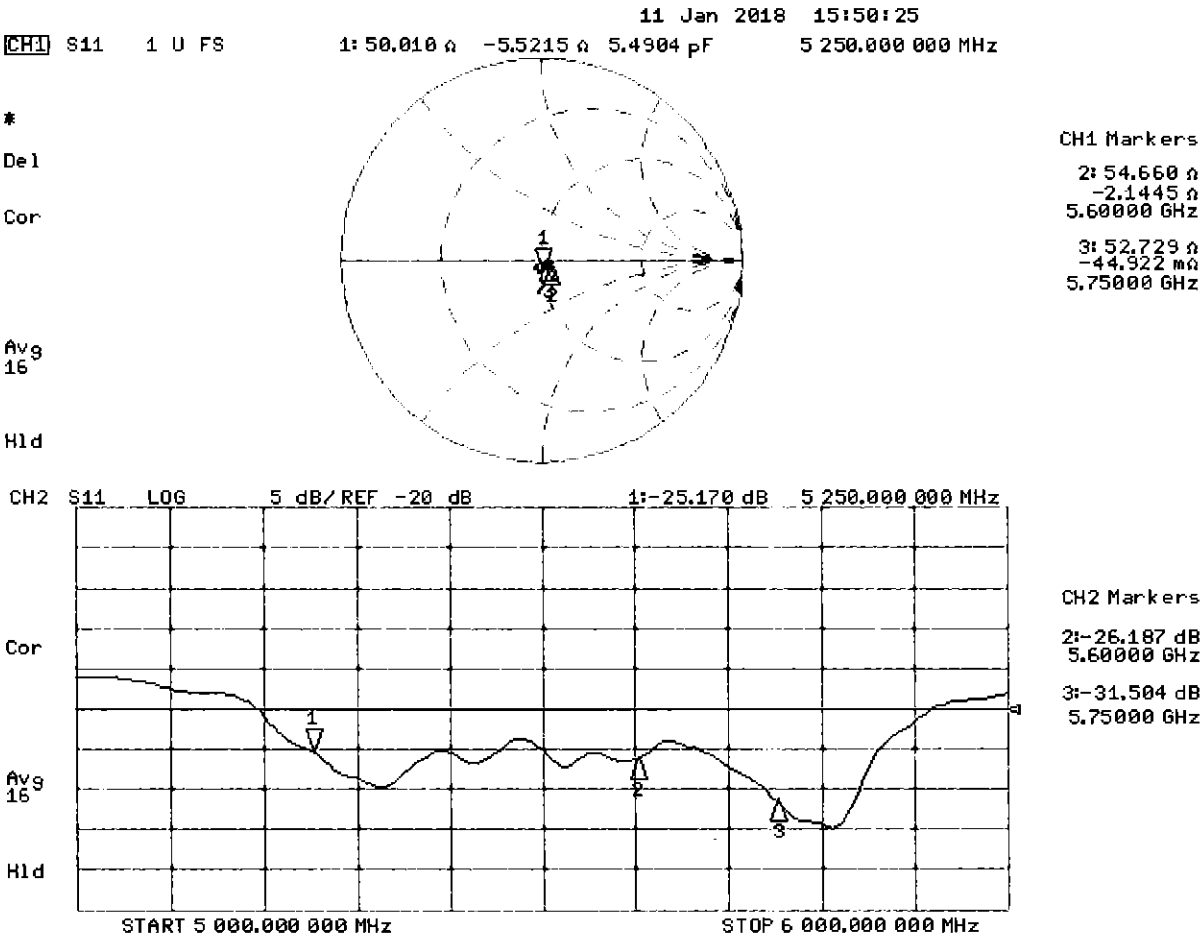

DASY5 Validation Report for Body TSL

Date: 10.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.48$ S/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.22$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.35, 5.35, 5.35); Calibrated: 30.12.2017, ConvF(5.26, 5.26, 5.26); Calibrated: 30.12.2017, ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2017, ConvF(4.57, 4.57, 4.57); Calibrated: 30.12.2017, ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.05 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.36 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 17.1 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.4 W/kg


SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.09 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 34.0 W/kg
SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.25 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.45 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 32.9 W/kg
SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.14 W/kg
Maximum value of SAR (measured) = 18.9 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.14 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 33.3 W/kg
SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.13 W/kg

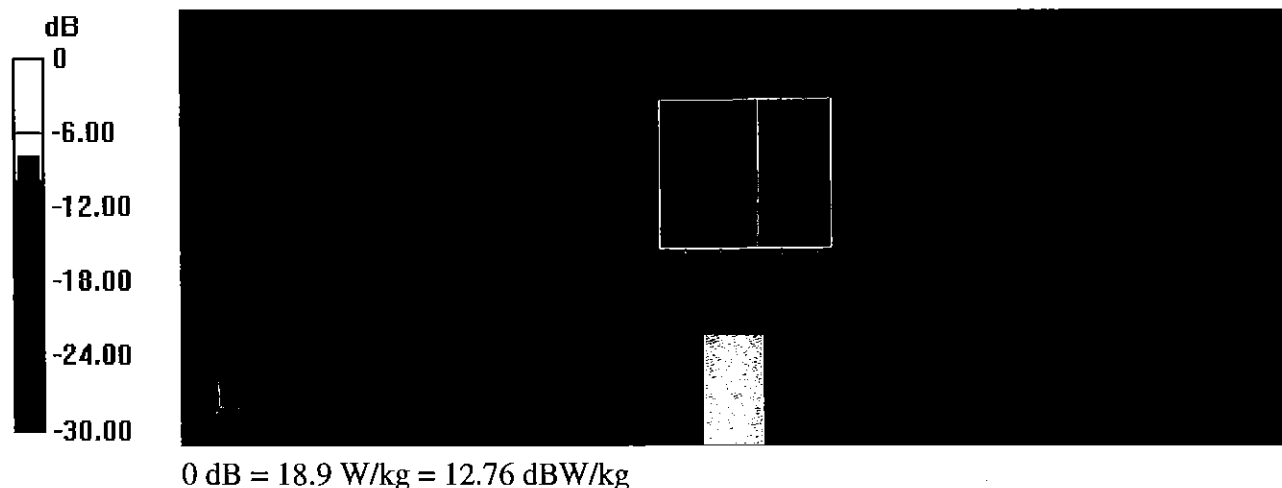

Impedance Measurement Plot for Body TSL

10 Jan 2018 17:45:41
 CH1 S11 1 U FS 1: 49.266 Ω -6.6719 Ω 4.5874 pF 5 200.000 000 MHz

*
 Del
 Cor
 Avg
 16
 H1d

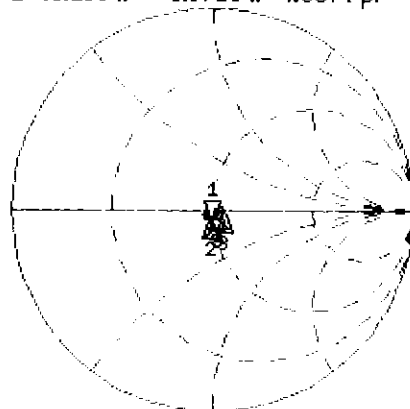


CH1 Markers

2: 48.449 Ω
 -3.9297 Ω
 5.25000 GHz
 3: 55.279 Ω
 -1.5723 Ω
 5.60000 GHz
 4: 52.627 Ω
 1.0625 Ω
 5.75000 GHz
 5: 51.801 Ω
 -375.00 m Ω
 5.80000 GHz

CH2 S11 LOG 5 dB/ REF -20 dB 1: -23.417 dB 5 200.000 000 MHz

Cor
 Avg
 16
 H1d

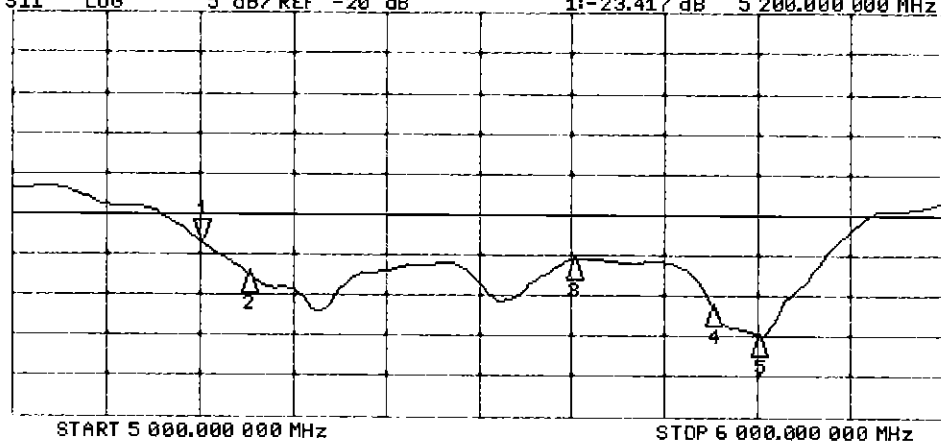

CH2 Markers

2: -27.356 dB
 5.25000 GHz
 3: -25.621 dB
 5.60000 GHz
 4: -31.162 dB
 5.75000 GHz
 5: -34.851 dB
 5.80000 GHz

DASY5 Validation Report for SAM Head

Date: 16.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.5$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.75, 5.75, 5.75); Calibrated: 30.12.2017, ConvF(4.96, 4.96, 4.96); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 72.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

SAM Head/Top - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 73.00 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.62 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 21.9 W/kg

SAM Head/Mouth - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 72.79 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 8.54 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

SAM Head/Mouth - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.69 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 8.88 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

SAM Head/Neck - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.48 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

SAM Head/Neck - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.90 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 21.8 W/kg

SAM Head/Ear - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.68 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 5.16 W/kg; SAR(10 g) = 1.76 W/kg

Maximum value of SAR (measured) = 11.1 W/kg

SAM Head/Ear - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.96 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 21.2 W/kg

SAR(1 g) = 5.68 W/kg; SAR(10 g) = 1.89 W/kg

Maximum value of SAR (measured) = 13.8 W/kg



0 dB = 13.8 W/kg = 11.40 dBW/kg

Certification of Calibration

Object D5GHzV2 – SN: 1057

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extension Calibration date: 1/16/2019

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	2/8/2018	Annual	2/8/2019	US39170122
Agilent	N5182A	MXG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY47420800
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Seekonk	NC-100	Torque Wrench	7/11/2018	Annual	7/11/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/3/2018	Annual	10/3/2019	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/11/2018	Annual	9/11/2019	1091
SPEAG	EX3DV4	SAR Probe	8/23/2018	Annual	8/23/2019	7308
SPEAG	EX3DV4	SAR Probe	6/25/2018	Annual	6/25/2019	7409

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 17.0 dBm	Measured Head SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 17.0 dBm	Measured Head SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5250	1/16/2018	1/16/2019	1.203	3.95	3.63	-8.33%	1.14	1.04	-8.77%	50	47.6	2.4	-5.5	-6.7	1.2	-25.2	-22.8	9.50%	PASS
5600	1/16/2018	1/16/2019	1.203	4.205	3.84	-8.68%	1.2	1.09	-9.17%	54.7	52.5	2.2	-2.1	1.6	3.7	-26.2	-30.6	-16.90%	PASS
5750	1/16/2018	1/16/2019	1.203	4.025	3.76	-6.58%	1.15	1.07	-6.96%	52.7	54.4	1.7	0	0.1	0.1	-31.5	-27.5	12.70%	PASS
Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 17.0 dBm	Measured Body SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 17.0 dBm	Measured Body SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5250	1/16/2018	1/16/2019	1.203	3.795	3.73	-1.71%	1.06	1.03	-2.37%	48.4	45.9	2.5	-3.9	-4	0.1	-27.4	-24.5	10.50%	PASS
5600	1/16/2018	1/16/2019	1.203	3.995	4.06	1.63%	1.12	1.12	0.45%	55.3	51	4.3	-1.6	2.8	4.4	-25.6	-30.7	-20.00%	PASS
5750	1/16/2018	1/16/2019	1.203	3.835	3.65	-4.82%	1.06	1.02	-3.77%	52.6	52.9	0.3	1.1	0.6	0.5	-31.2	-30.7	1.60%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

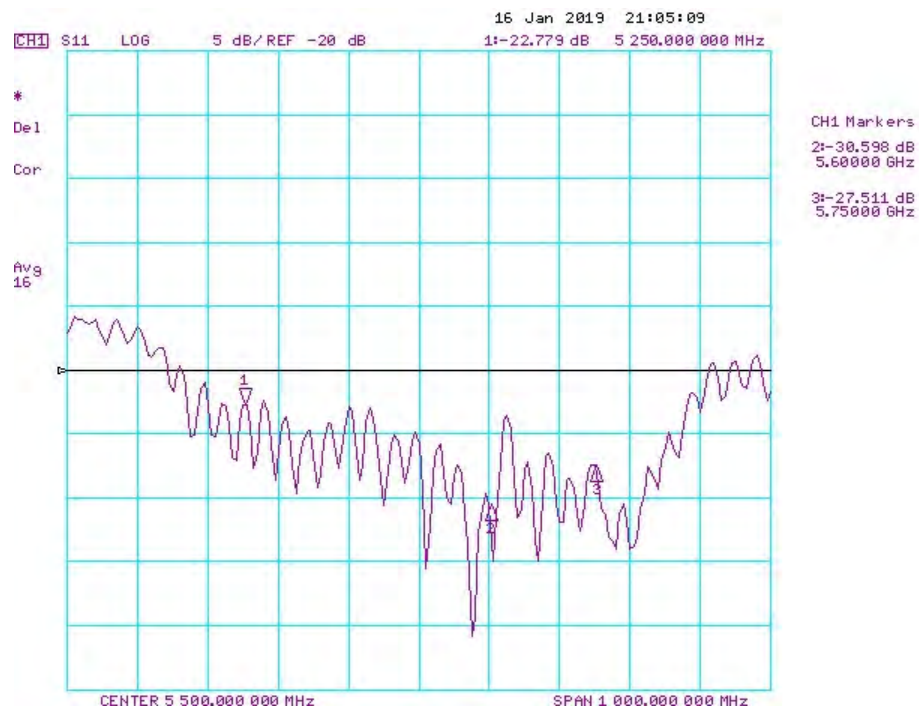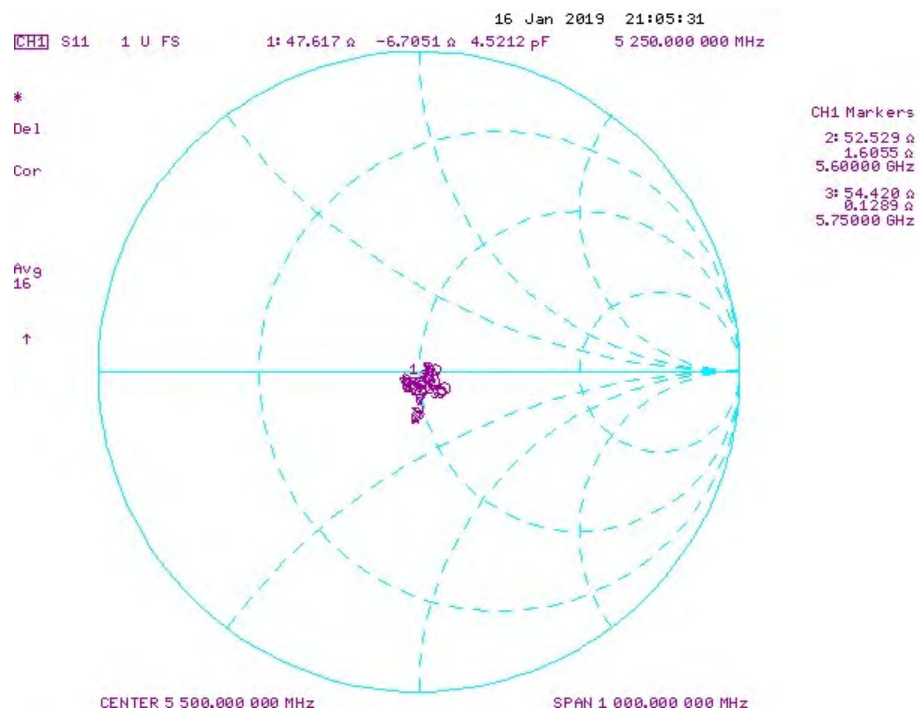

Impedance & Return-Loss Measurement Plot for Body TSL

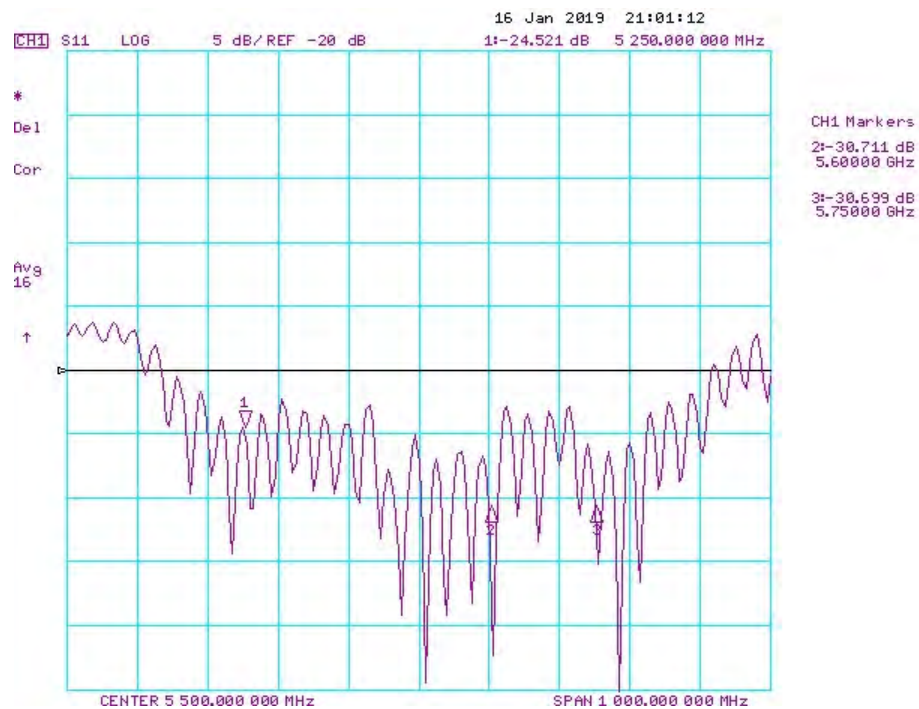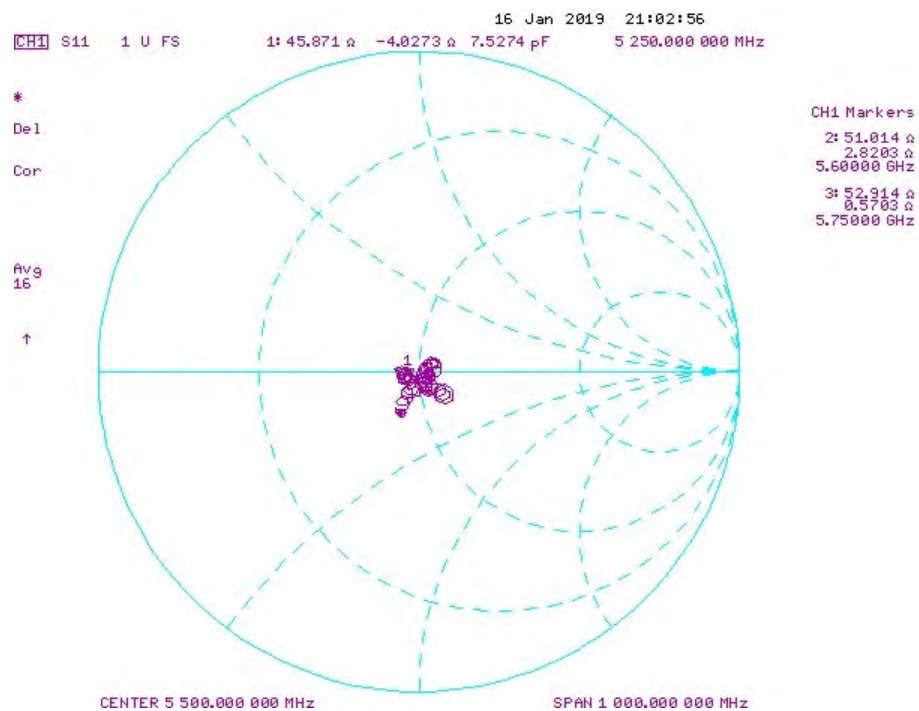

Certification of Calibration

Object: D5GHzV2 – SN: 1057

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extension Calibration date: 1/16/2020

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Control Company	4352	Ultra Long Stem Thermometer	8/2/2018	Biennial	8/2/2020	181334684
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	7/2/2019	Annual	7/2/2020	MY53401181
Rohde & Schwarz	ZNLE6	Vector Network Analyzer	10/11/2019	Annual	10/11/2020	101307
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAKS-3.5	Portable DAK	9/10/2019	Annual	9/10/2020	1045
Anritsu	MA2411B	Pulse Power Sensor	8/14/2019	Annual	8/14/2020	1315051
Anritsu	MA2411B	Pulse Power Sensor	8/8/2019	Annual	8/8/2020	1339008
Anritsu	ML2495A	Power Meter	1/15/2020	Annual	1/15/2021	1328004
Agilent	N5182A	MXG Vector Signal Generator	8/19/2019	Annual	8/19/2020	MY47420837
Seekonk	NC-100	Torque Wrench	5/9/2018	Biennial	5/9/2020	22217
MiniCircuits	ZHDC-16-63-S+	Bidirectional Coupler	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
SPEAG	EX3DV4	SAR Probe	5/16/2019	Annual	5/16/2020	7406
SPEAG	EX3DV4	SAR Probe	6/19/2019	Annual	6/19/2020	7409
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/20/2019	Annual	6/20/2020	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/8/2019	Annual	5/8/2020	728

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION


Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.


The following dipole was checked to pass the above 3 requirements to have 3-year calibration period from the calibration date:

Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 17.0 dBm	Measured Head SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 17.0 dBm	Measured Head SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5250	1/16/2018	1/16/2020	1.203	3.96	3.72	-6.06%	1.14	1.05	-7.89%	50	46.9	3.1	-5.5	-6.3	0.8	-25.2	-22.8	9.50%	PASS
5600	1/16/2018	1/16/2020	1.203	4.205	3.91	-7.62%	1.2	1.11	-7.50%	54.7	52.9	1.8	-2.1	-1.4	0.7	-26.2	-30.2	-15.20%	PASS
5750	1/16/2018	1/16/2020	1.203	4.025	3.72	-7.58%	1.15	1.05	-8.70%	52.7	52.4	0.4	0	-2.3	2.3	-31.5	-29.8	5.30%	PASS
Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 17.0 dBm	Measured Body SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 17.0 dBm	Measured Body SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5250	1/16/2018	1/16/2020	1.203	3.795	3.75	-1.19%	1.05	1.04	-1.42%	48.4	51	2.6	-3.9	-2.8	1.1	-27.4	-30.6	-11.80%	PASS
5600	1/16/2018	1/16/2020	1.203	3.995	3.98	-0.38%	1.12	1.1	-1.35%	55.3	53.6	1.7	-1.6	0.2	1.8	-25.6	-29.2	-14.00%	PASS
5750	1/16/2018	1/16/2020	1.203	3.835	3.87	0.91%	1.06	1.06	0.00%	52.6	52.8	0.2	1.1	0.5	0.6	-31.2	-31.4	-0.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

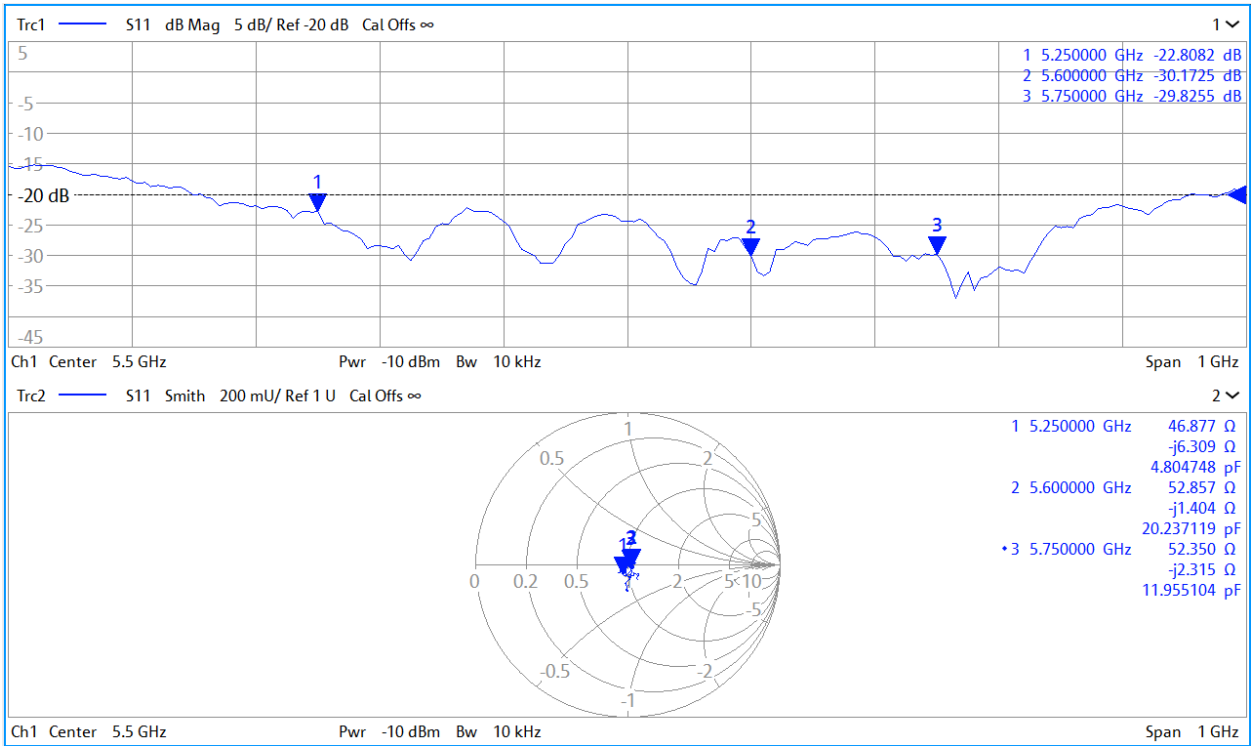

Impedance & Return-Loss Measurement Plot for Body TSL

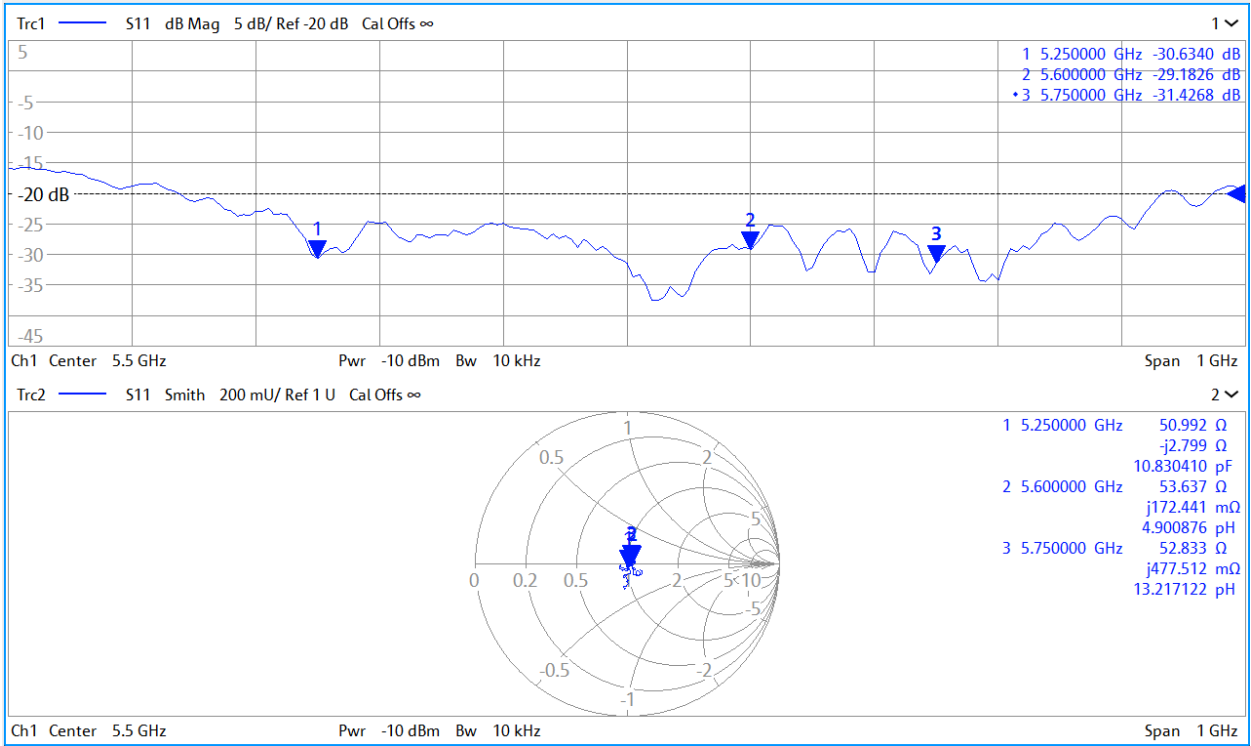



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **PC Test**

Certificate No: **D5GHzV2-1191_Sep19**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1191**

Calibration procedure(s) **QA CAL-22.v4
Calibration Procedure for SAR Validation Sources between 3-6 GHz**

BN ✓
09/26/2019

Calibration date: **September 17, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX3DV4	SN: 3503	25-Mar-19 (No. EX3-3503_Mar19)	Mar-20
DAE4	SN: 601	30-Apr-19 (No. DAE4-601_Apr19)	Apr-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Manu Seitz** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: September 18, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.1 $\pm$ 6 %	4.53 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.13 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.8 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.6 ± 6 %	4.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.03 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.44 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.51 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.76 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	5.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.19 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	45.9 ± 6 %	6.26 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.66 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	53.5 Ω - 6.2 j Ω
Return Loss	- 23.2 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	56.4 Ω - 4.3 j Ω
Return Loss	- 22.8 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	59.1 Ω + 1.9 j Ω
Return Loss	- 21.4 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	50.9 Ω - 8.6 j Ω
Return Loss	- 21.3 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	53.2 Ω - 4.1 j Ω
Return Loss	- 26.0 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	58.1 Ω - 4.2 j Ω
Return Loss	- 21.4 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	60.3 Ω + 2.3 j Ω
Return Loss	- 20.4 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	57.5 Ω + 2.3 j Ω
Return Loss	- 22.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions (f=5200 MHz)

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.4 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.8 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.4 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	5.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.1 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	1.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	17.8 W/kg ± 19.9 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions (f=5800 MHz)

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.7 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.5 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.91 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.9 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	5.60 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.9 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	1.92 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.1 W/kg ± 19.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 13.09.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 35.1$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.4, 5.4, 5.4) @ 5250 MHz, ConvF(4.95, 4.95, 4.95) @ 5600 MHz, ConvF(4.98, 4.98, 4.98) @ 5750 MHz; Calibrated: 25.03.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 76.95 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 76.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.9 W/kg

SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 19.2 W/kg



Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.20 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.6 W/kg


SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

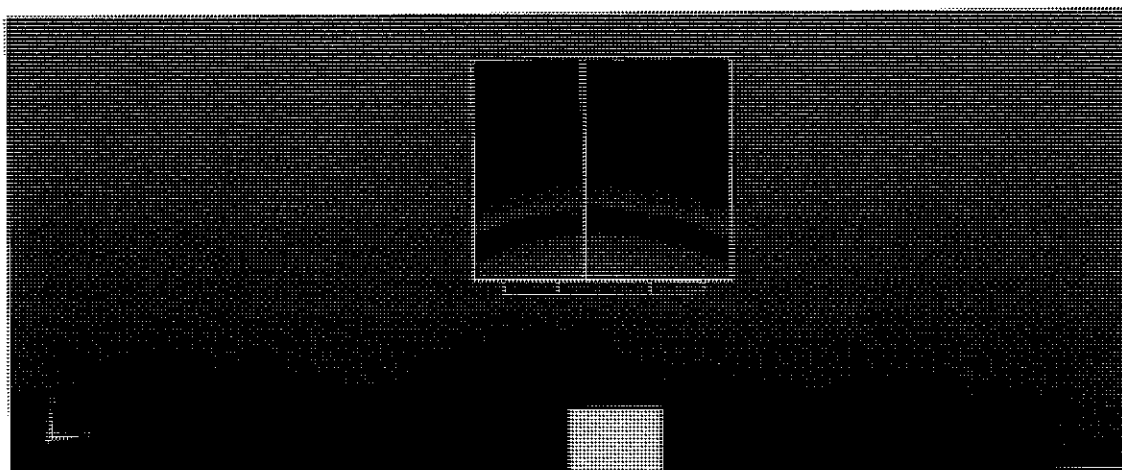

0 dB = 18.9 W/kg = 12.76 dBW/kg

Impedance Measurement Plot for Head TSL

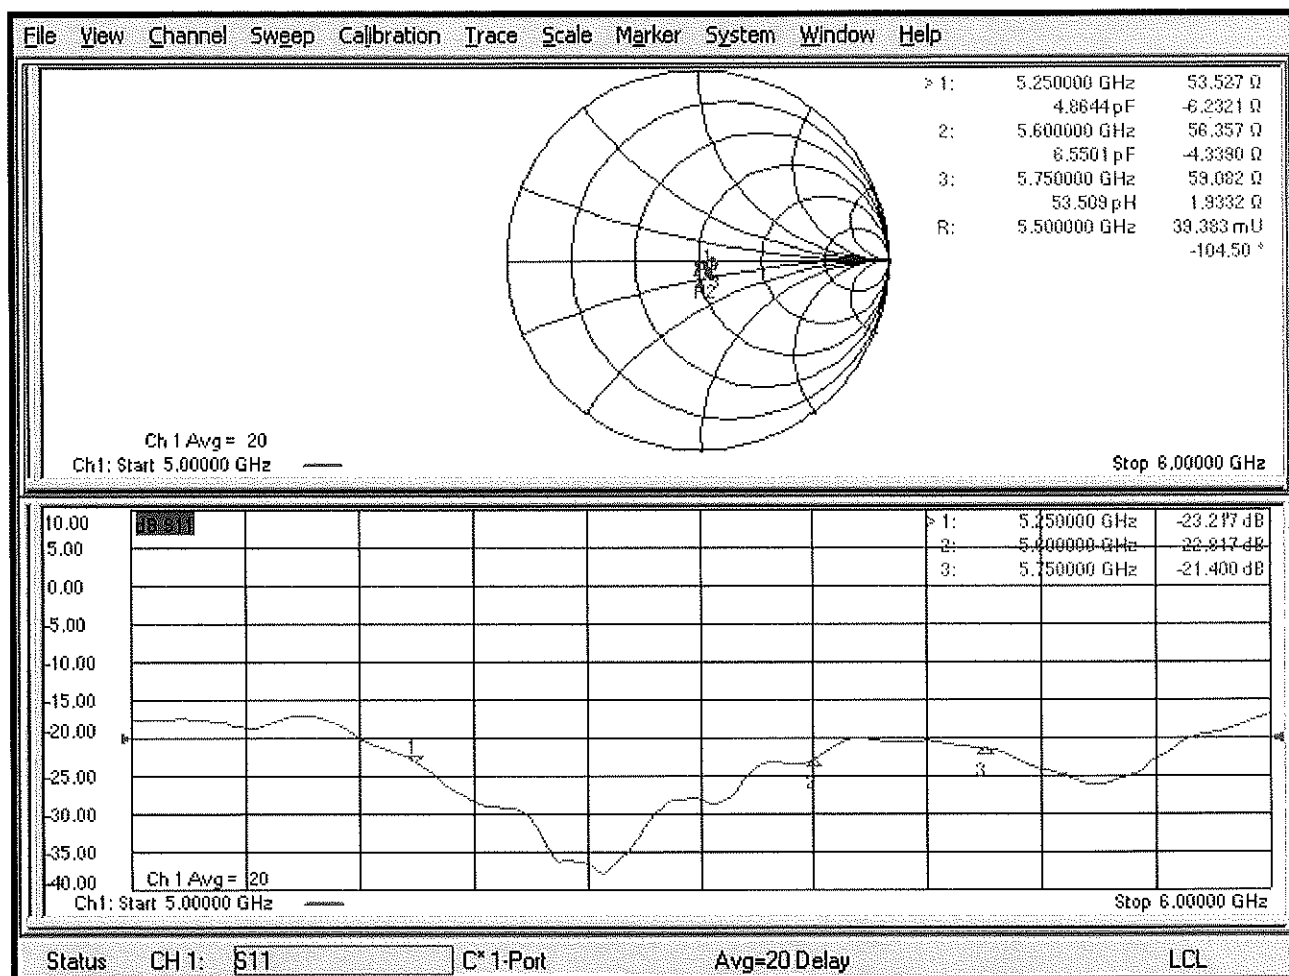

DASY5 Validation Report for Body TSL

Date: 16.09.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.26$ S/m; $\epsilon_r = 45.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.14, 5.14, 5.14) @ 5200 MHz, ConvF(5.26, 5.26, 5.26) @ 5250 MHz, ConvF(4.74, 4.74, 4.74) @ 5600 MHz, ConvF(4.62, 4.62, 4.62) @ 5750 MHz, ConvF(4.62, 4.62, 4.62) @ 5800 MHz; Calibrated: 25.03.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.78 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 28.7 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 17.3 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.09 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 30.3 W/kg


SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 18.1 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 68.19 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 34.3 W/kg
SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.22 W/kg
Maximum value of SAR (measured) = 19.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 66.80 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 35.1 W/kg
SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.15 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 67.13 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 33.8 W/kg
SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.12 W/kg
Maximum value of SAR (measured) = 18.5 W/kg

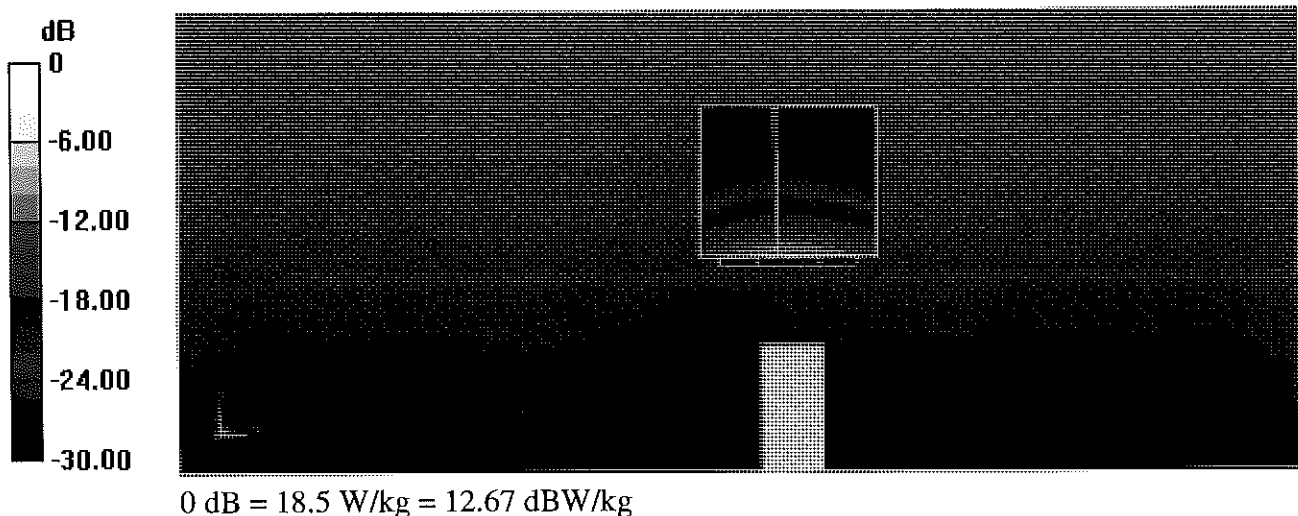

Impedance Measurement Plot for Body TSL

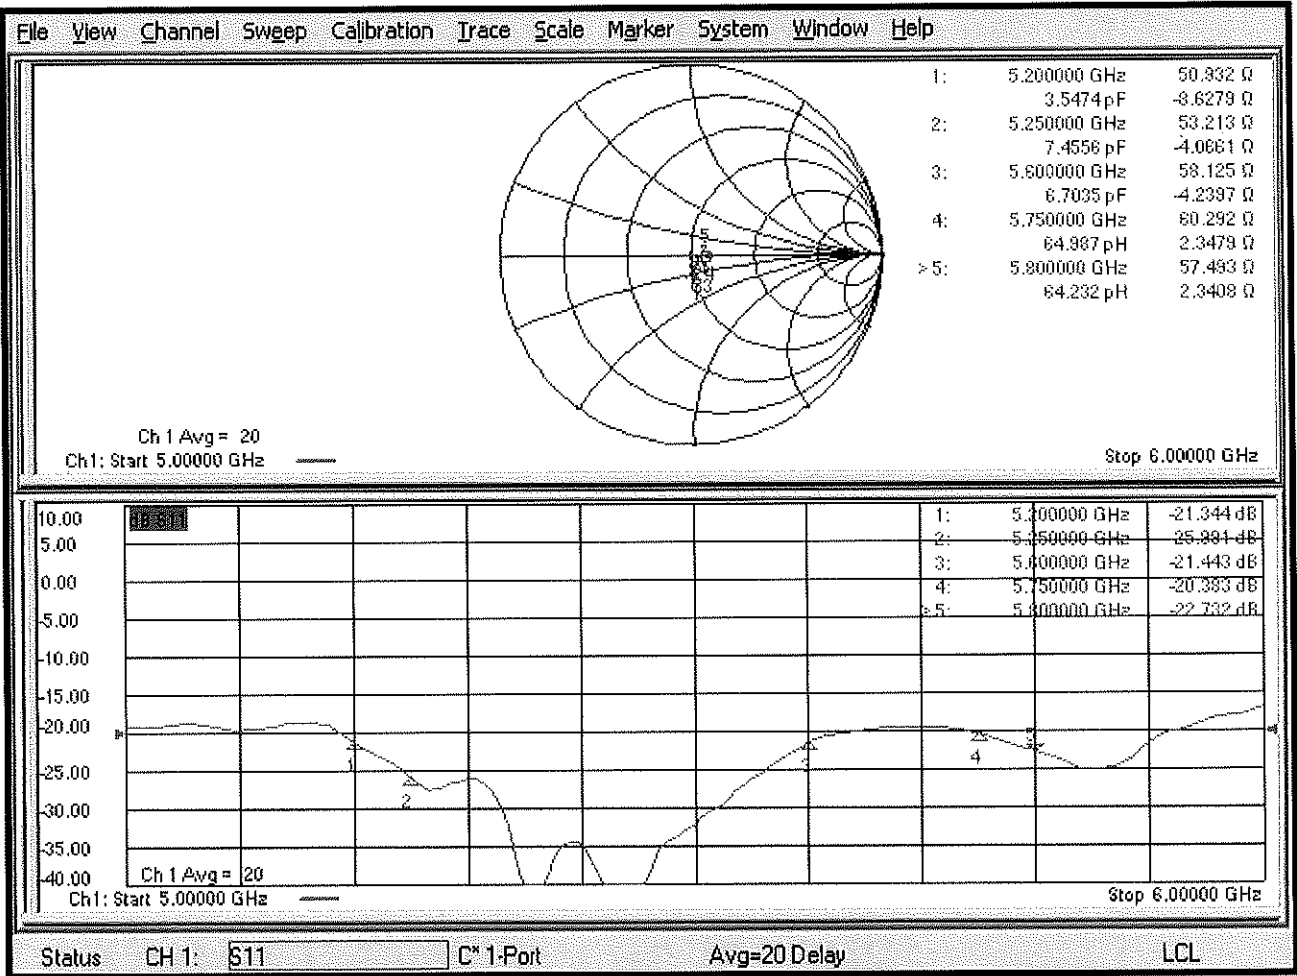

DASY5 Validation Report for SAM Head

Date: 17.09.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.64, 5.64, 5.64) @ 5200 MHz, ConvF(4.96, 4.96, 4.96) @ 5800 MHz; Calibrated: 25.03.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: SAM Head
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

SAM/Head/Top - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 74.84 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.34 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

SAM/Head/Top - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 70.45 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 8.18 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 20.2 W/kg

SAM/Head/Mouth - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 76.86 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 8.37 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

SAM/Head/Mouth - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 71.46 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 8.56 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 21.3 W/kg

SAM/Head/Neck - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.71 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

SAM/Head/Neck - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.62 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 20.2 W/kg

SAM/Head/Ear - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.89 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 5.11 W/kg; SAR(10 g) = 1.78 W/kg

Maximum value of SAR (measured) = 11.4 W/kg



SAM/Head/Ear - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.22 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 5.6 W/kg; SAR(10 g) = 1.92 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

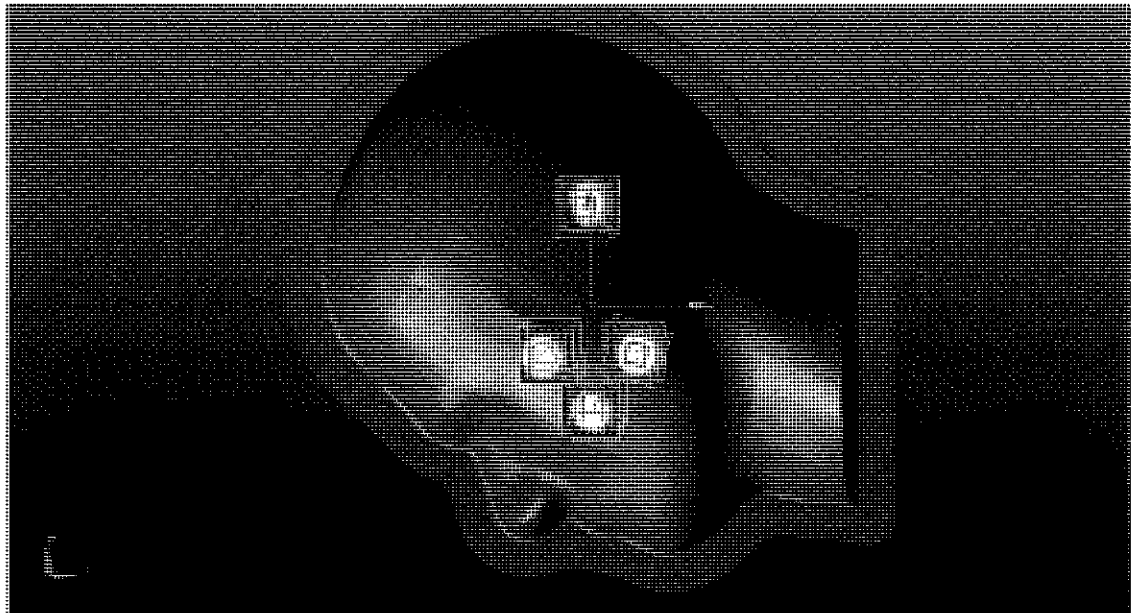

0 dB = 11.4 W/kg = 10.57 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan20**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL 05.011
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **January 13, 2020**

BN
02-05-2020

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX3DV4	SN: 7349	31-Dec-19 (No. EX3-7349_Dec19)	Dec-20
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	<i>Leif Klysner</i>

	Name	Function	Signature
Approved by:	Katja Pokovic	Technical Manager	<i>Katja Pokovic</i>

Issued: January 21, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	42.6 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.65 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.30 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.1 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.53 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.96 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.64 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.4 Ω - 3.1 j Ω
Return Loss	- 30.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.7 Ω - 5.5 j Ω
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.385 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 13.01.2020

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.89, 9.89, 9.89) @ 835 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.94 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.58 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 3.20 W/kg

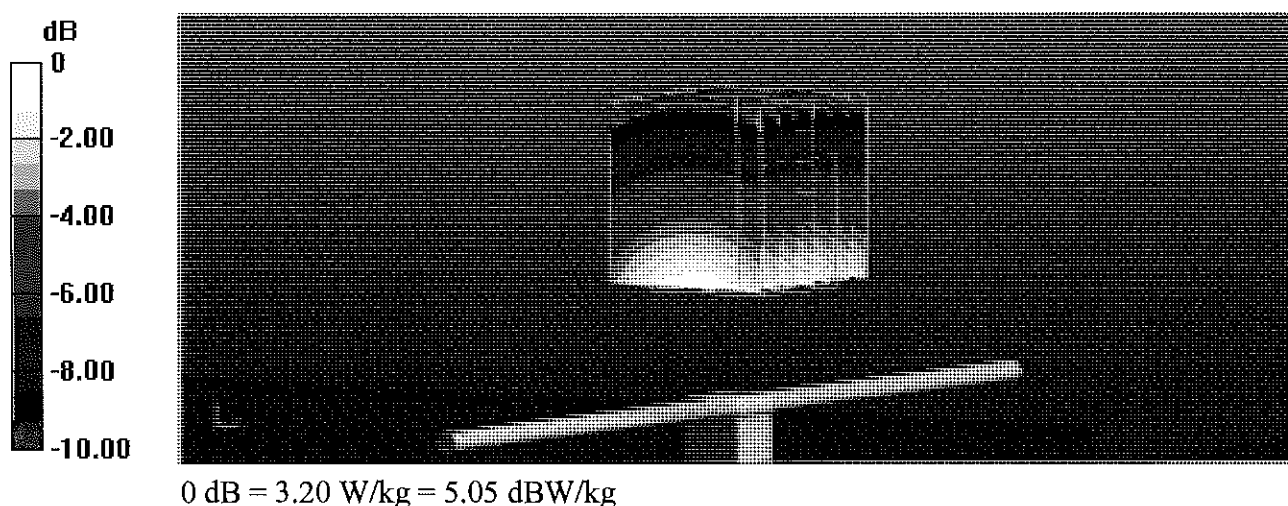

Impedance Measurement Plot for Head TSL

