



MEASUREMENT REPORT

FCC Part 90

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

05/04 - 07/06/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2005040080-04.A3L

FCC ID:

A3LSMF707U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F707U

Additional Model(s):

SM-F707U1, SM-F707W

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

§2.1049, §22(H), §90(S), §90(R)

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 1 of 66

T A B L E O F C O N T E N T S


1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications.....	5
3.0	DESCRIPTION OF TESTS.....	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions.....	6
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS.....	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal.....	29
7.4	Band Edge Emissions at Antenna Terminal	37
7.5	Conducted Power Output Data.....	48
7.6	Radiated Power (ERP)	50
7.7	Radiated Spurious Emissions Measurements	53
7.8	Frequency Stability / Temperature Variation.....	59
8.0	CONCLUSION	66

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 2 of 66



MEASUREMENT REPORT

FCC Part 22(H) & 90



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 26	15 MHz	QPSK	821.5	ERP	0.076	18.78	13M5G7D
		16QAM	821.5	ERP	0.059	17.68	13M5W7D
		64QAM	821.5	ERP	0.050	16.96	13M5W7D
		256QAM	821.5	ERP	0.029	14.68	13M5W7D
	15 MHz	QPSK	821.5	Conducted	0.337	25.28	13M5G7D
		16QAM	821.5	Conducted	0.294	24.68	13M5W7D
		64QAM	821.5	Conducted	0.203	23.08	13M5W7D
		256QAM	821.5	Conducted	0.106	20.25	13M5W7D
	10 MHz	QPSK	819.0	Conducted	0.353	25.48	9M00G7D
		16QAM	819.0	Conducted	0.299	24.76	8M96W7D
		64QAM	819.0	Conducted	0.200	23.00	9M01W7D
		256QAM	819.0	Conducted	0.107	20.28	8M95W7D
	5 MHz	QPSK	816.5 - 821.5	Conducted	0.344	25.37	4M53G7D
		16QAM	816.5 - 821.5	Conducted	0.296	24.72	4M51W7D
		64QAM	816.5 - 821.5	Conducted	0.210	23.22	4M51W7D
		256QAM	816.5 - 821.5	Conducted	0.115	20.61	4M53W7D
	3 MHz	QPSK	815.5 - 822.5	Conducted	0.344	25.37	2M70G7D
		16QAM	815.5 - 822.5	Conducted	0.296	24.71	2M70W7D
		64QAM	815.5 - 822.5	Conducted	0.232	23.65	2M71W7D
		256QAM	815.5 - 822.5	Conducted	0.113	20.53	2M71W7D
	1.4 MHz	QPSK	814.7 - 823.3	Conducted	0.333	25.23	1M11G7D
		16QAM	814.7 - 823.3	Conducted	0.292	24.65	1M11W7D
		64QAM	814.7 - 823.3	Conducted	0.225	23.52	1M10W7D
		256QAM	814.7 - 823.3	Conducted	0.114	20.57	1M10W7D
LTE Band 14	10 MHz	QPSK	793.0	ERP	0.080	19.05	9M02G7D
		16QAM	793.0	ERP	0.068	18.30	8M98W7D
		64QAM	793.0	ERP	0.055	17.40	9M01W7D
		256QAM	793.0	ERP	0.036	15.50	8M97W7D
	5 MHz	QPSK	790.5 - 795.5	ERP	0.051	17.12	4M51G7D
		16QAM	790.5 - 795.5	ERP	0.043	16.31	4M50W7D
		64QAM	790.5 - 795.5	ERP	0.038	15.79	4M53W7D
		256QAM	790.5 - 795.5	ERP	0.038	15.79	4M49W7D
CDMA BC10	N/A	CDMA	817.9 - 823.1	Conducted	0.32	25.08	1M27F9W

EUT Overview

FCC ID: A3LSMF707U	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 3 of 66	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF707U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 4 of 66	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF707U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90(R), 22(H) and 90(S).

This device can operate in one of two physical configurations – “open” and “closed”. All emissions are investigated in both modes for compliance.

Test Device Serial No.: 1076S, 9050S, 1064M

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n5, n66, n25, n2, n41), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious and AC line conducted emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF707U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 5 of 66	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§2.1053, §90.635, §90(S), §90(R)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10 \log_{10}(\text{Power [Watts]})$ specified in 90(S).

The RSE measurements are also performed using a field strength measurement method using the following formula:

$$\begin{aligned} \text{Field Strength [dBuV/m]} &= \text{RSE raw level [dBm]} + \text{AFCL [dB/m]} + 10 \\ \text{EIRP Spurious Level [dBm]} &= \text{Field Strength} + 20 \log(D) - 104.8 \end{aligned}$$

Where D: Test distance, AFCL: Antenna Factor + Cable Loss

FCC ID: A3LSMF707U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 6 of 66	

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: A3LSMF707U	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 7 of 66	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 8 of 66

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx2
-	LTx3	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx3
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Espec	ESX-2CA	Environmental Chamber	6/13/2019	Annual	7/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-4GHS	USB Power Sensor	6/18/2020	Annual	6/18/2021	12001070013
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/19/2019	Biennial	7/19/2020	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100037
Emco	3116	Horn Antenna (18 - 40GHz)	6/7/2018	Biennial	6/7/2020	9203-2178

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF707U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 9 of 66	

6.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission – BC10

Example: Channel 476 CDMA BC10 Mode 3rd Harmonic (2453.70MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 10 of 66

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
FCC ID: A3LSMF707U
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
Mode(s): CDMA / EvDO / LTE
Band: Band Class 10 / Band 26 / Band 14

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.691(a) 90.543(a)	Conducted Band Edge / Spurious Emissions	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10 \log(P)$ dB.(Band 14) > $43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge (Band 26)		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046 90.635	Conducted Power	< 100 Watts		PASS	Section 7.5
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
90.542(a)(7)	Effective Radiated Power (Band 14)	< 3 Watts max. ERP		PASS	Section 7.6
2.1053 90.691(a) 90.543(e)	Radiated Spurious Emissions	> $43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 11 of 66

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.5.
- 5) For radiated measurements, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Control."

FCC ID: A3LSMF707U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 12 of 66

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

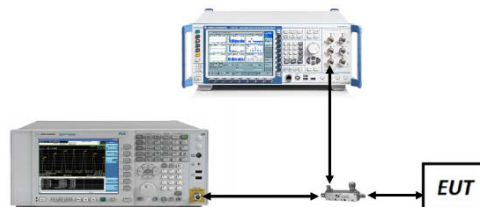



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 13 of 66

CDMA BC10

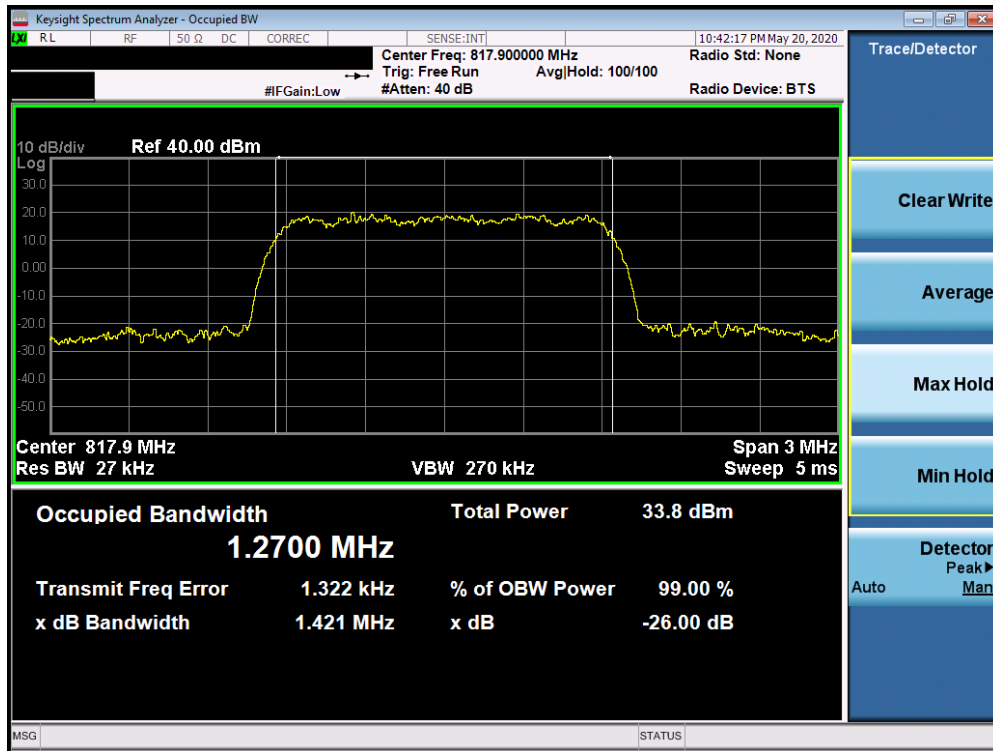

Plot 7-1. Occupied Bandwidth Plot (CDMA, Ch. 476)

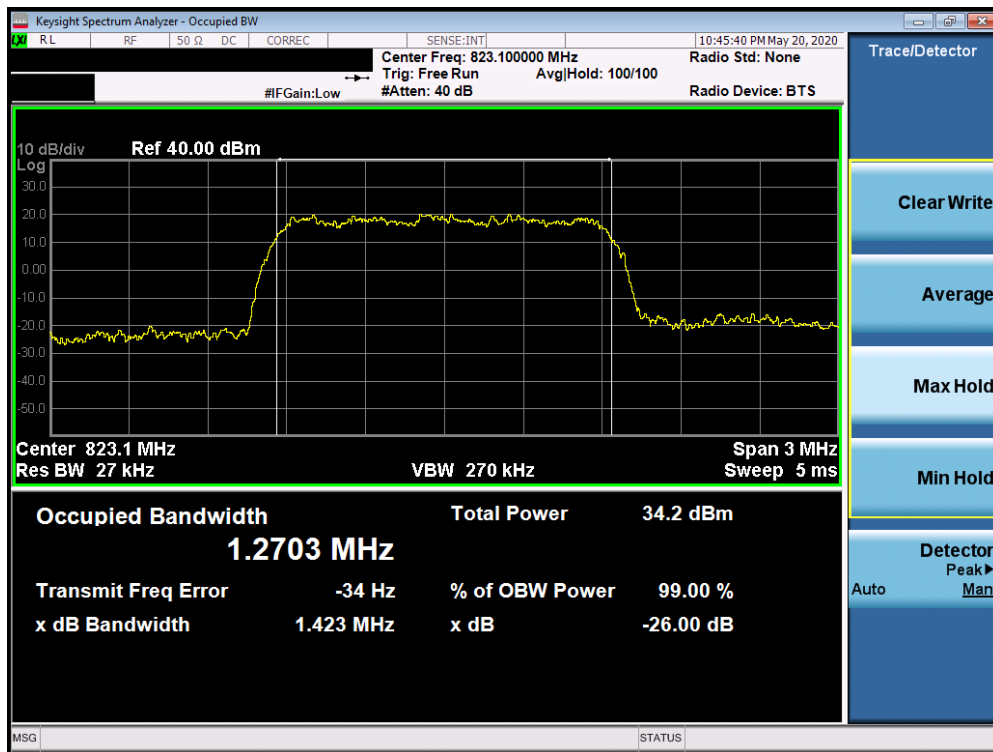


Plot 7-2. Occupied Bandwidth Plot (CDMA, Ch. 684)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 14 of 66

LTE Band 26




Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz QPSK - Full RB Configuration)

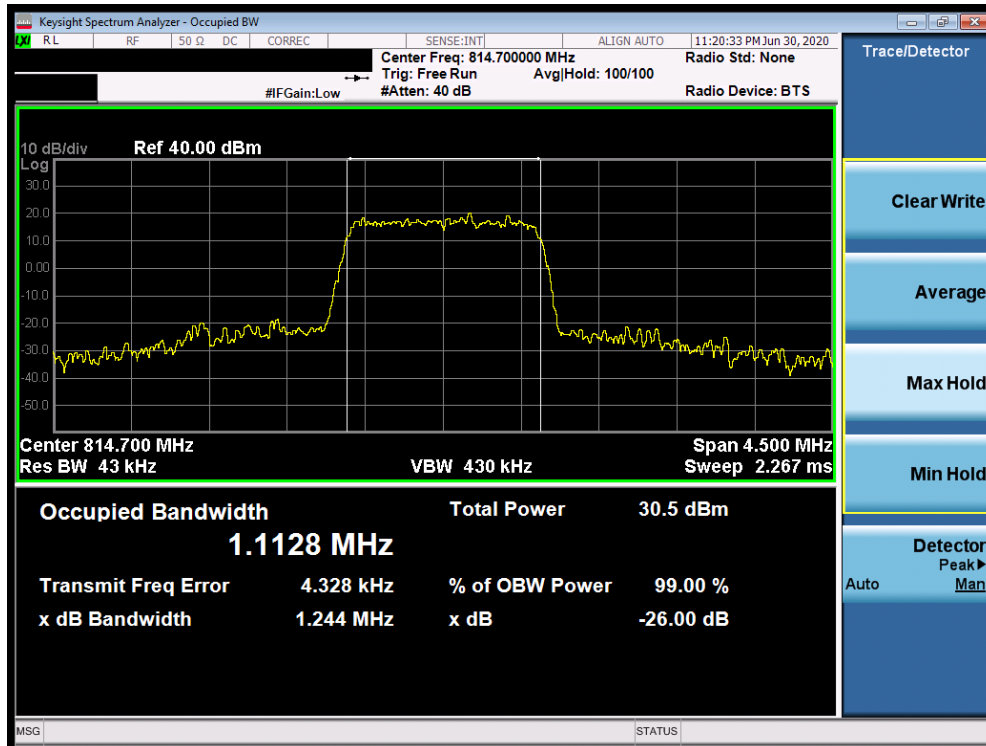


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 15 of 66

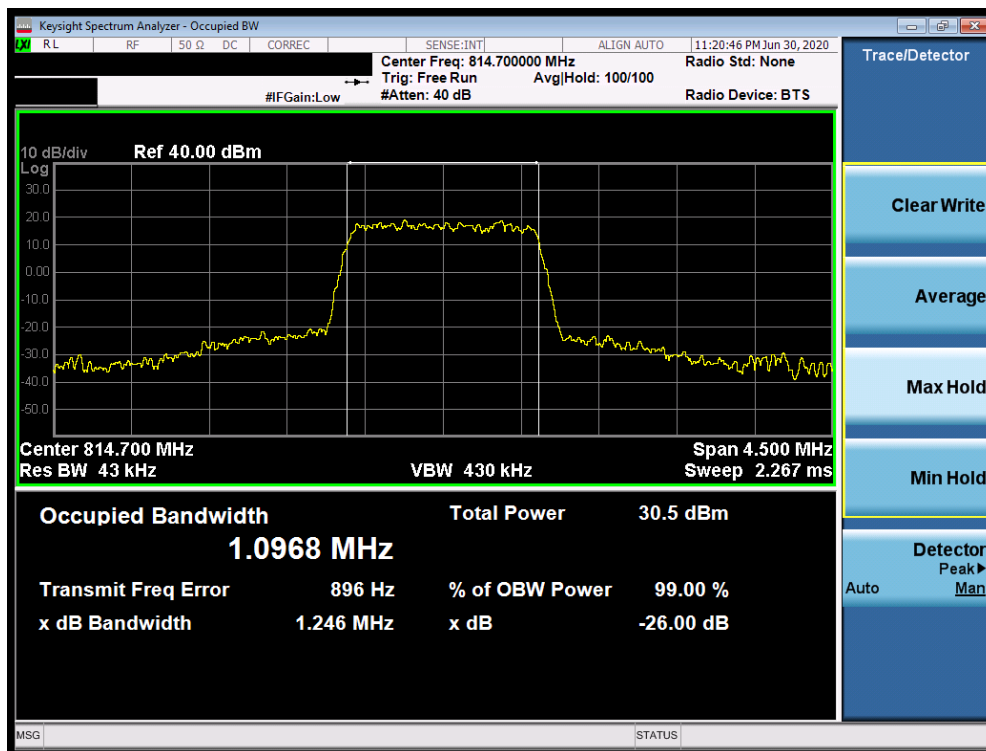


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 64-QAM - Full RB Configuration)

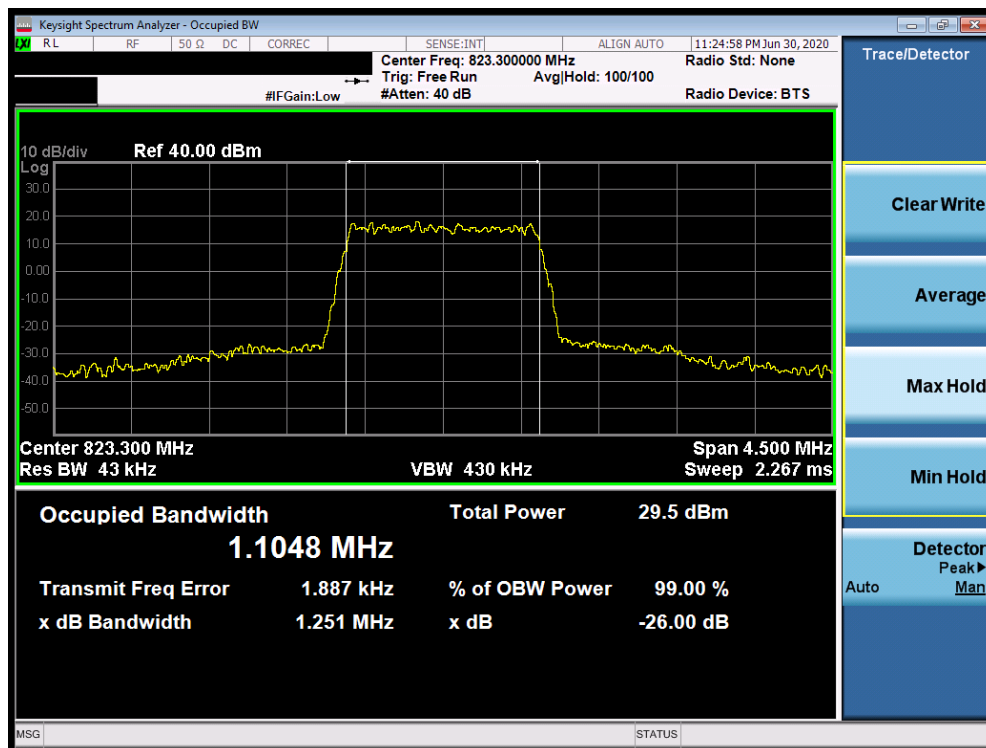


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 16 of 66

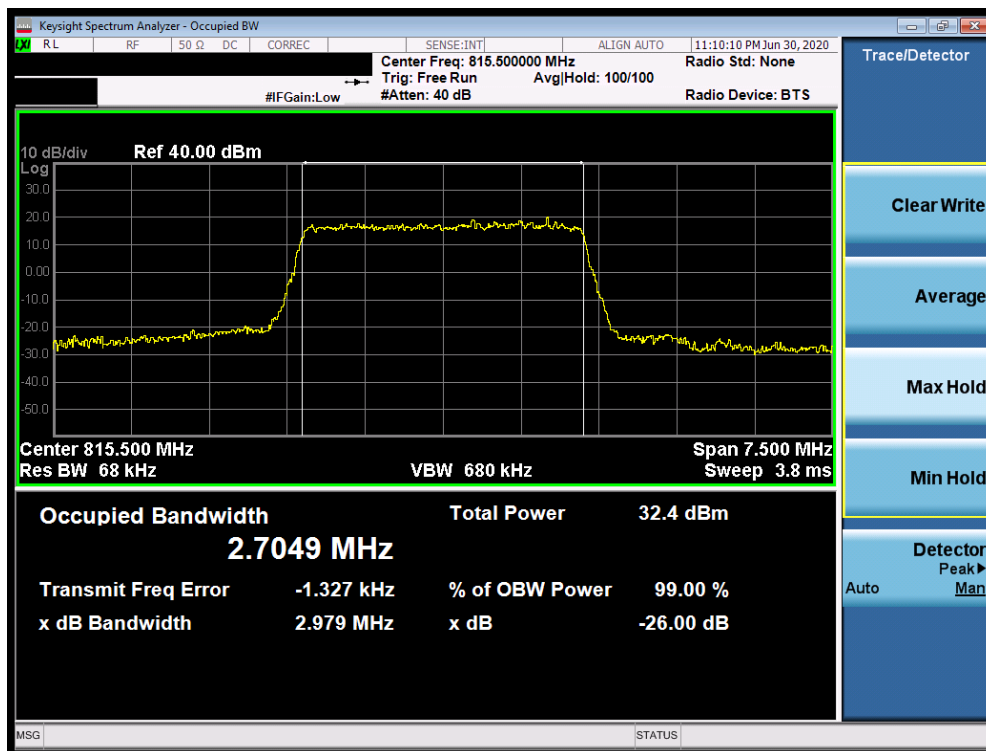


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration)

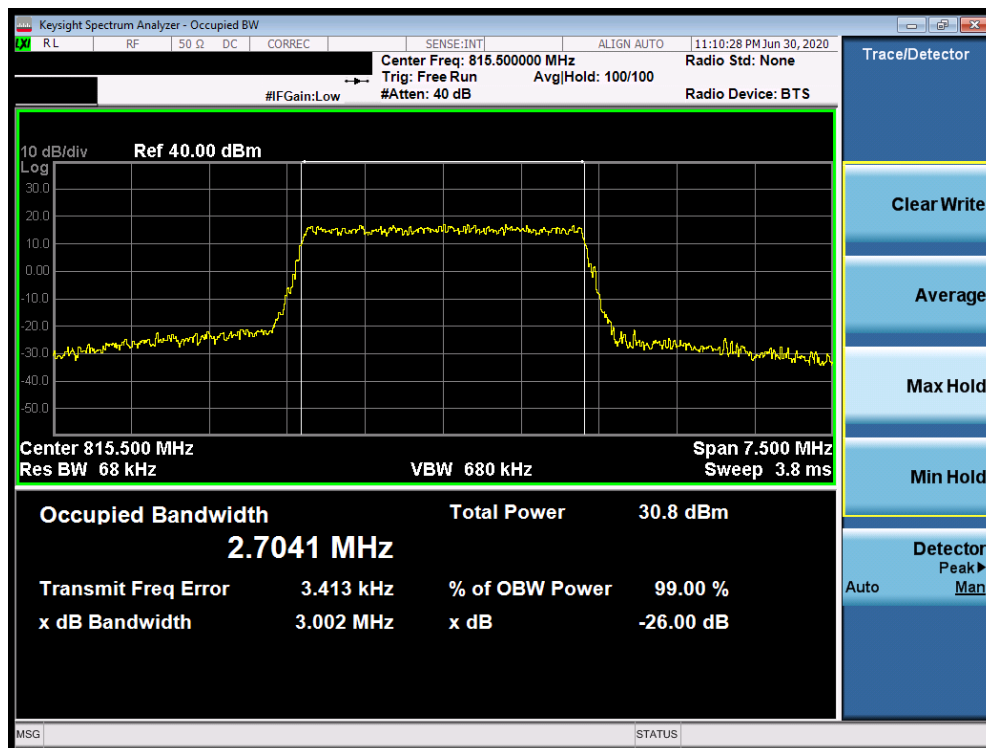


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 17 of 66

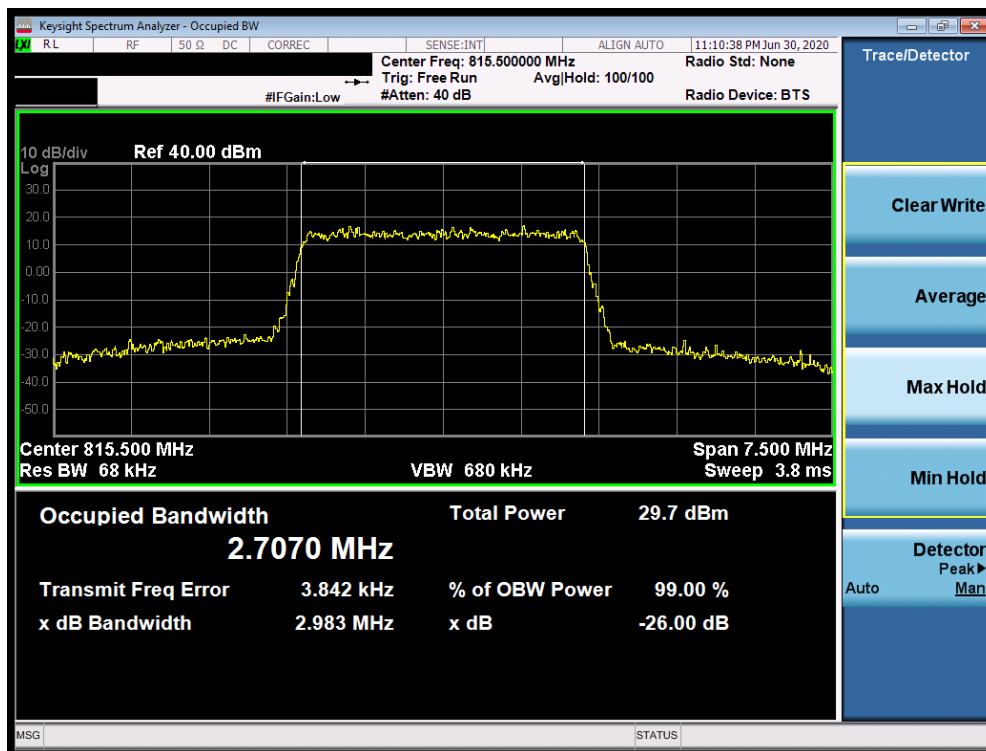


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 64-QAM - Full RB Configuration)

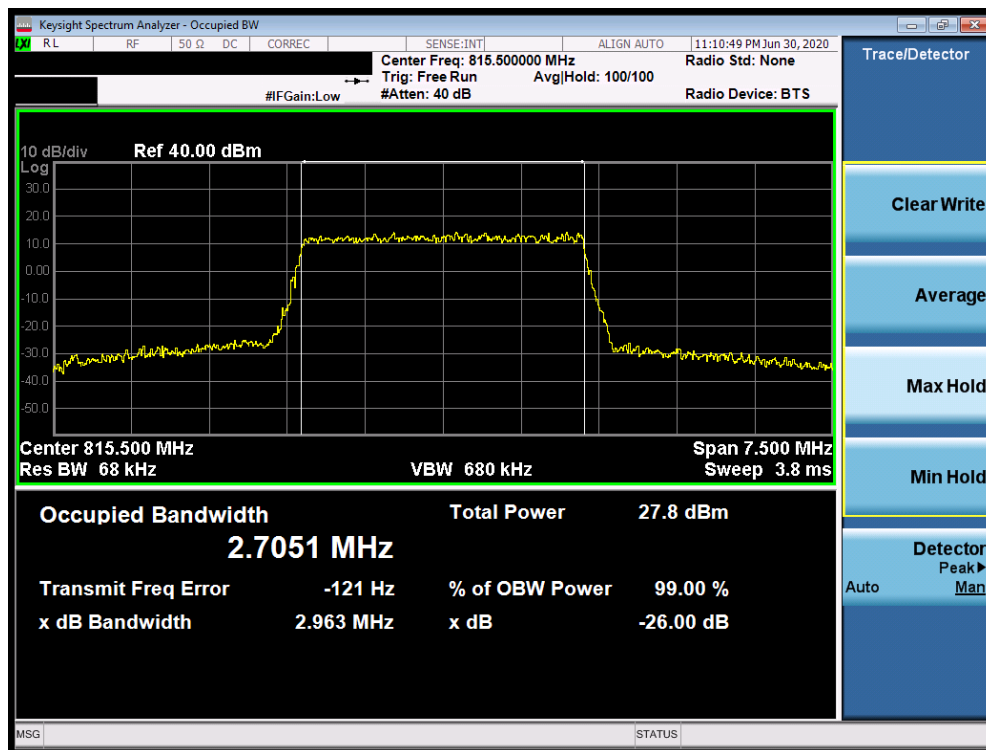


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 18 of 66

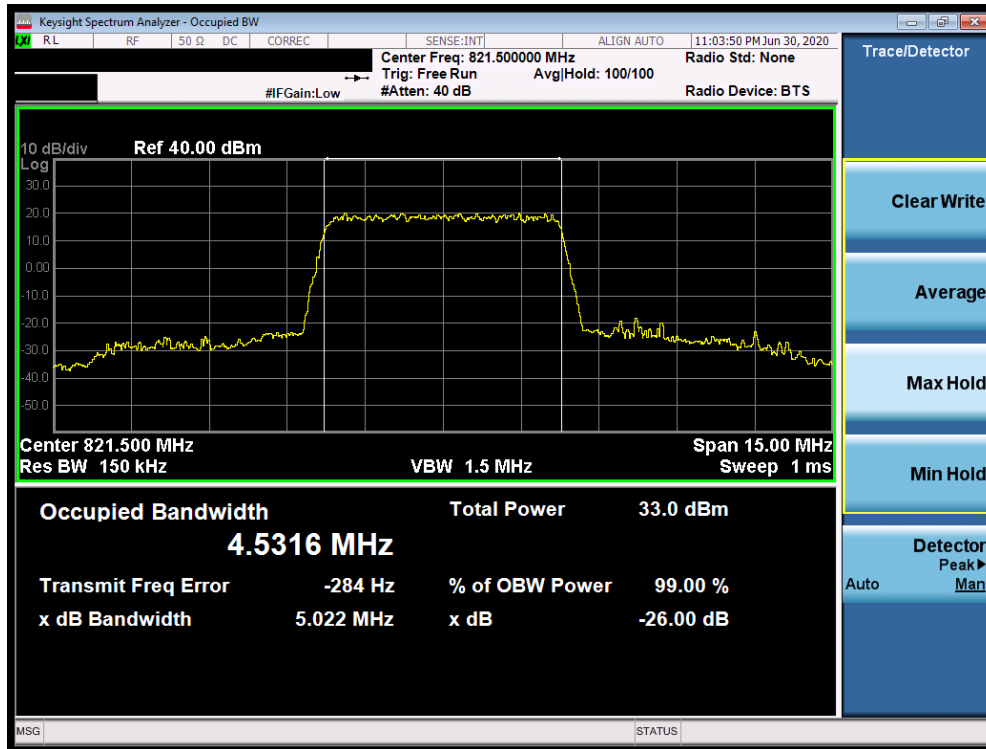


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration)

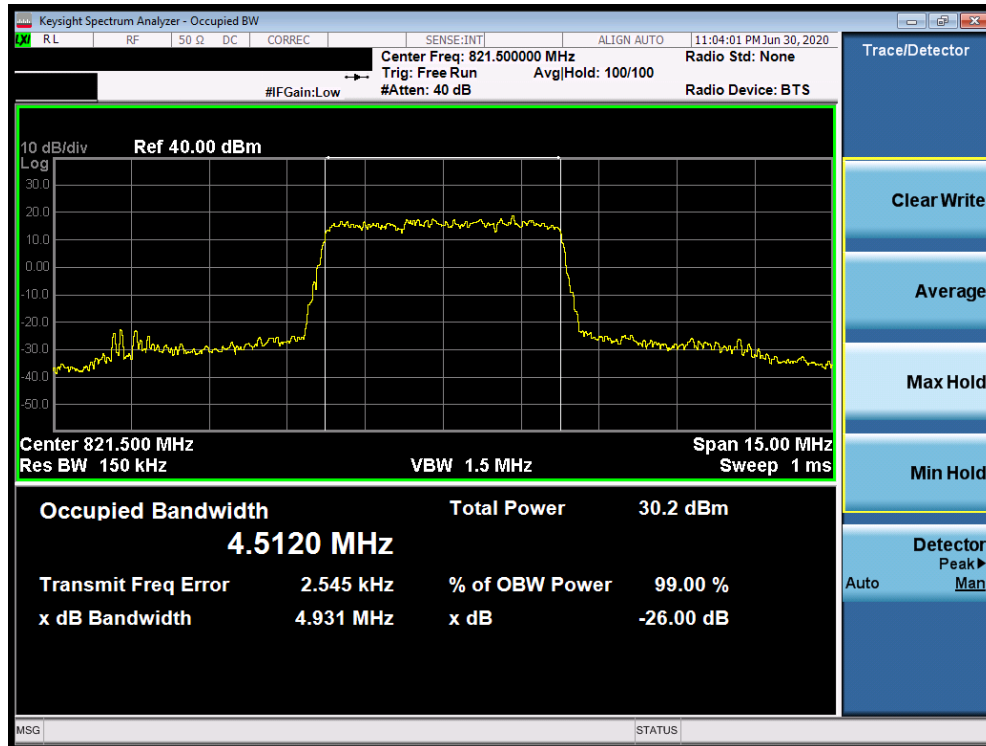


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 19 of 66	

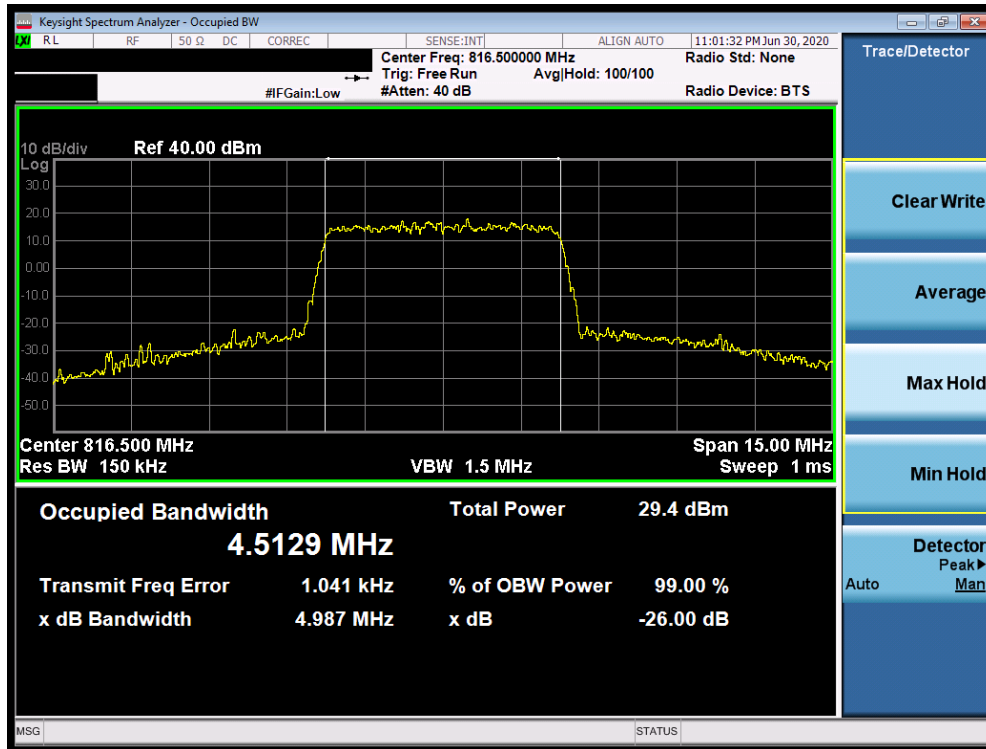


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 64-QAM - Full RB Configuration)

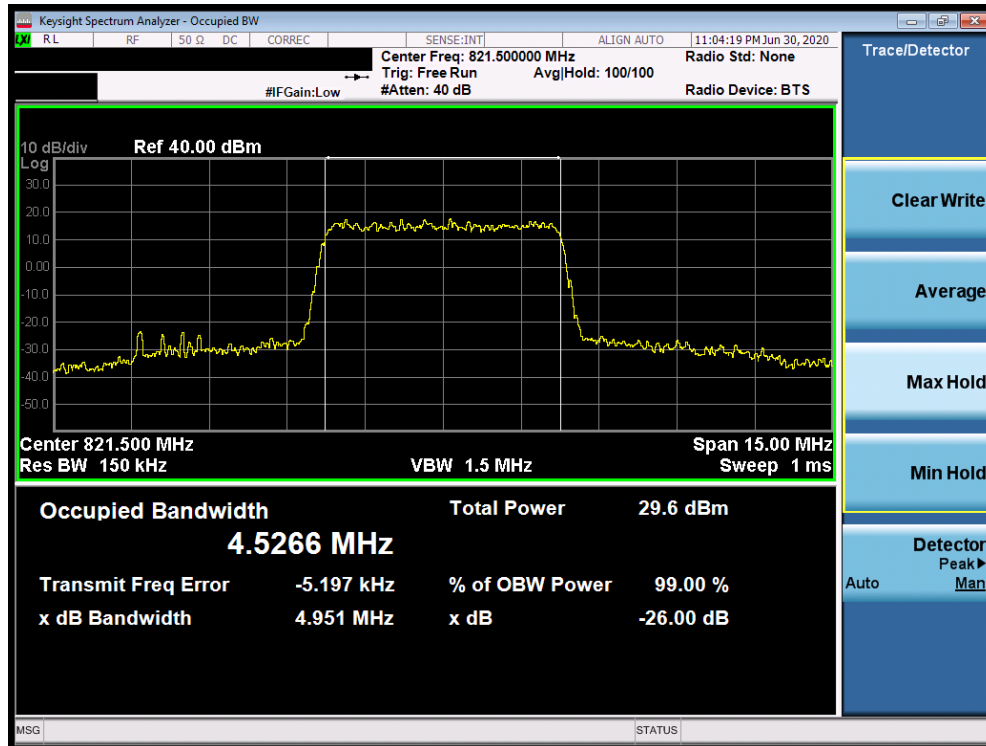


Plot 7-14. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 20 of 66

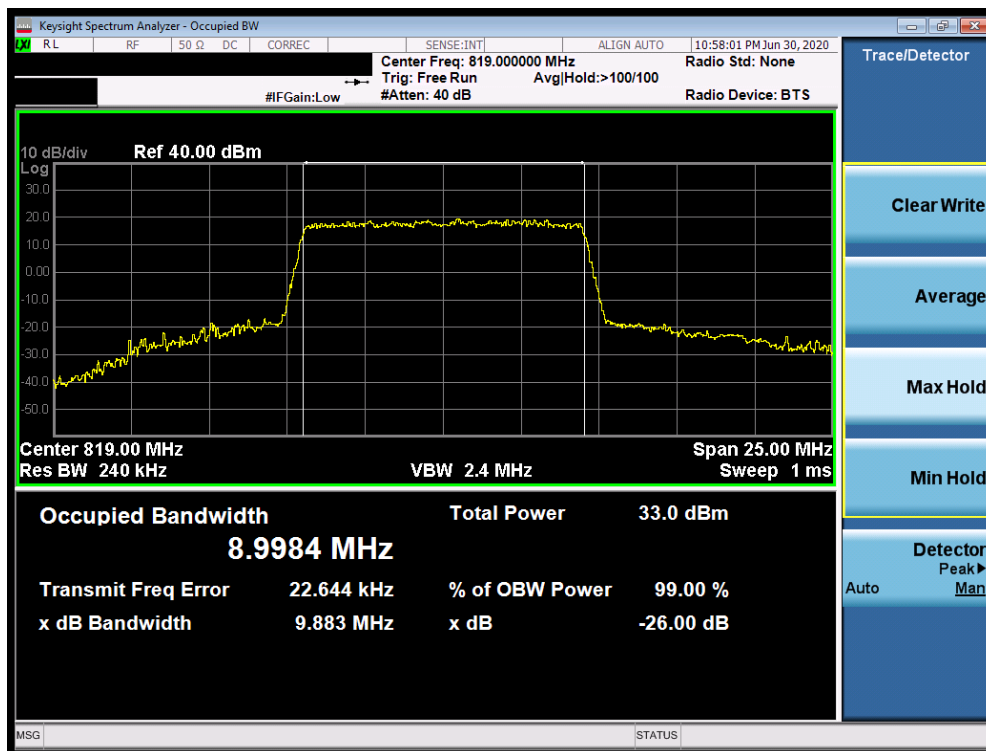


Plot 7-15. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration)

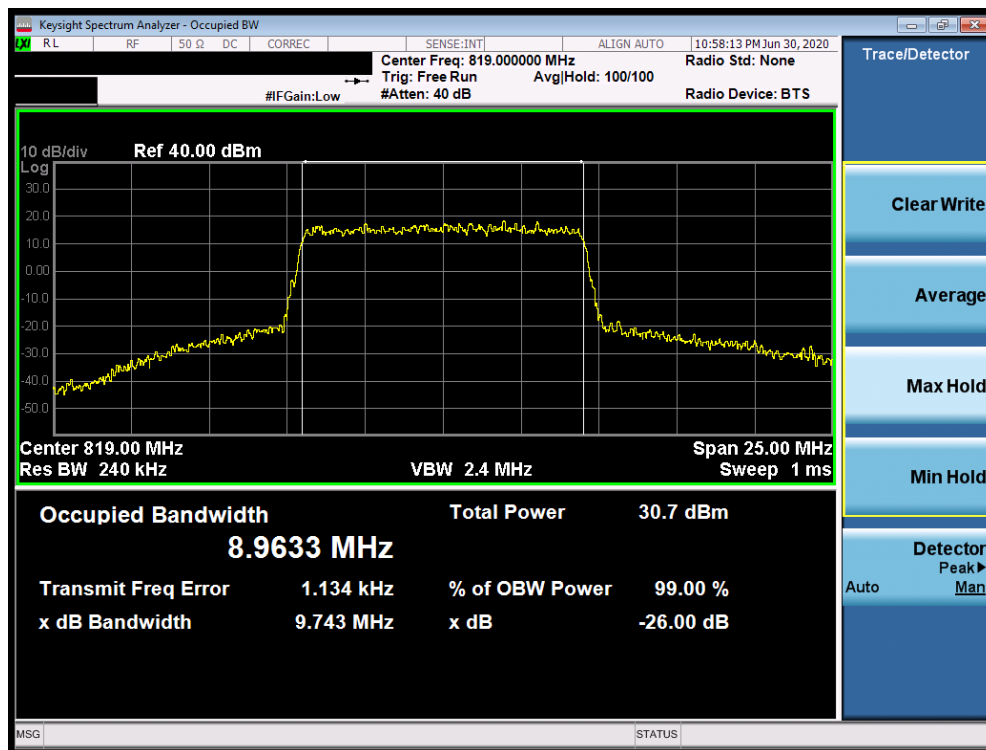


Plot 7-16. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 21 of 66

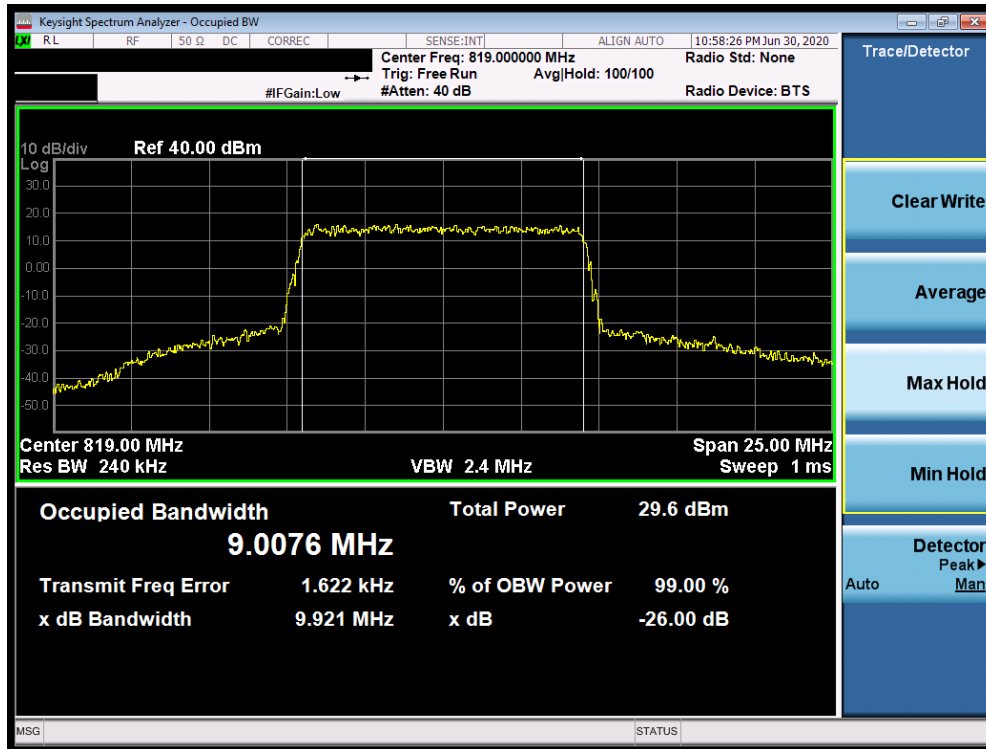


Plot 7-17. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 64-QAM - Full RB Configuration)

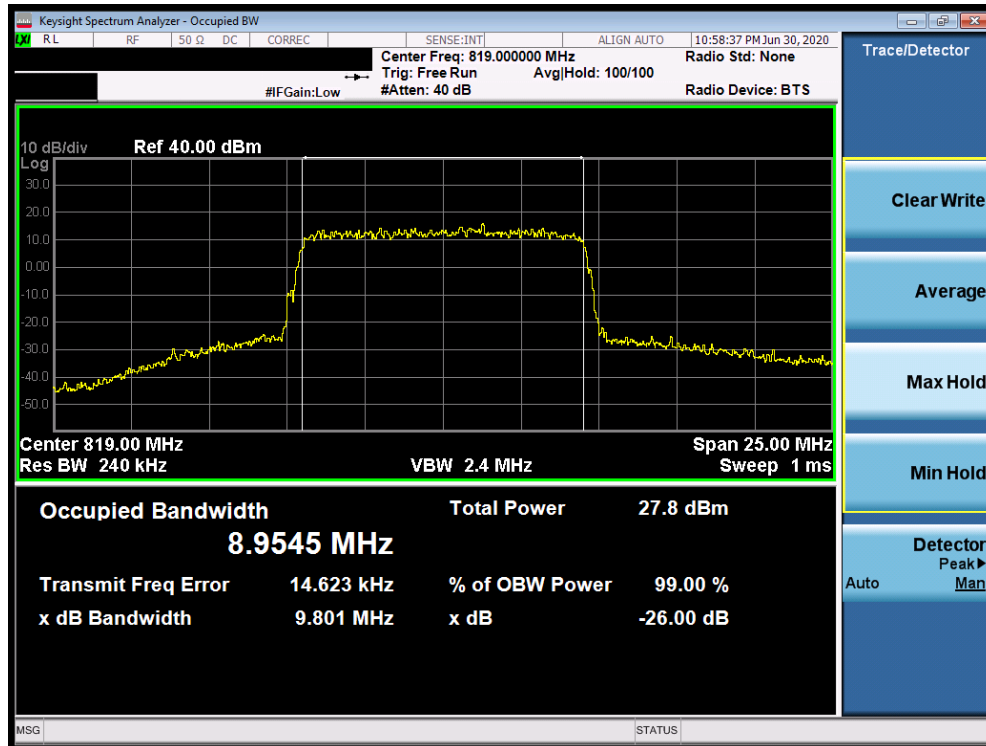


Plot 7-18. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 22 of 66

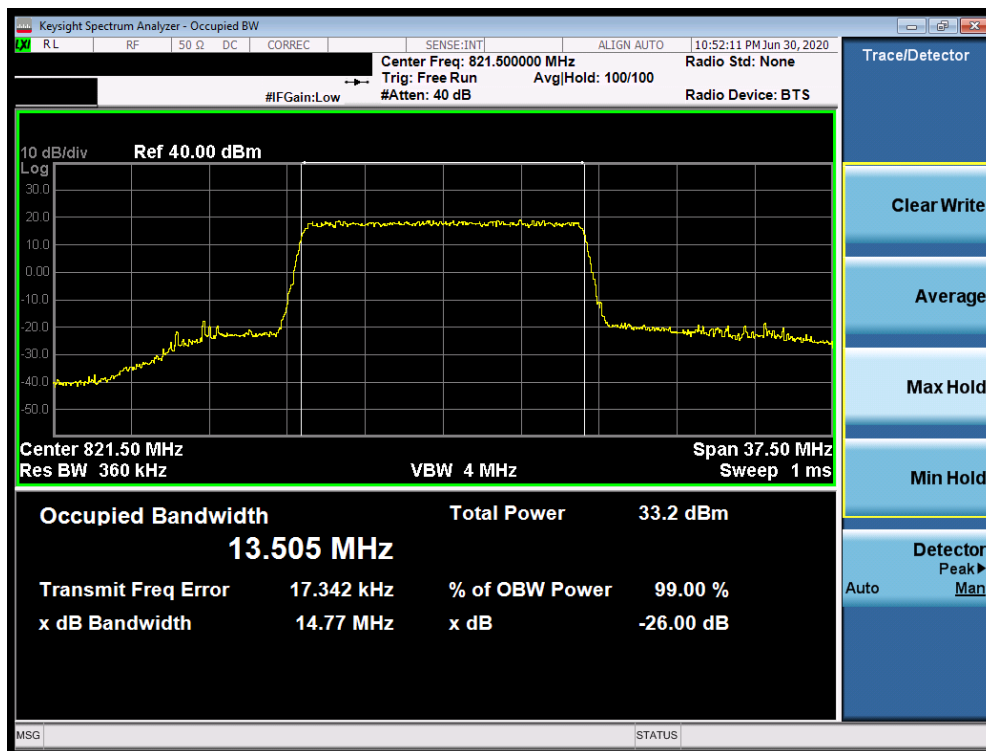


Plot 7-19. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration)

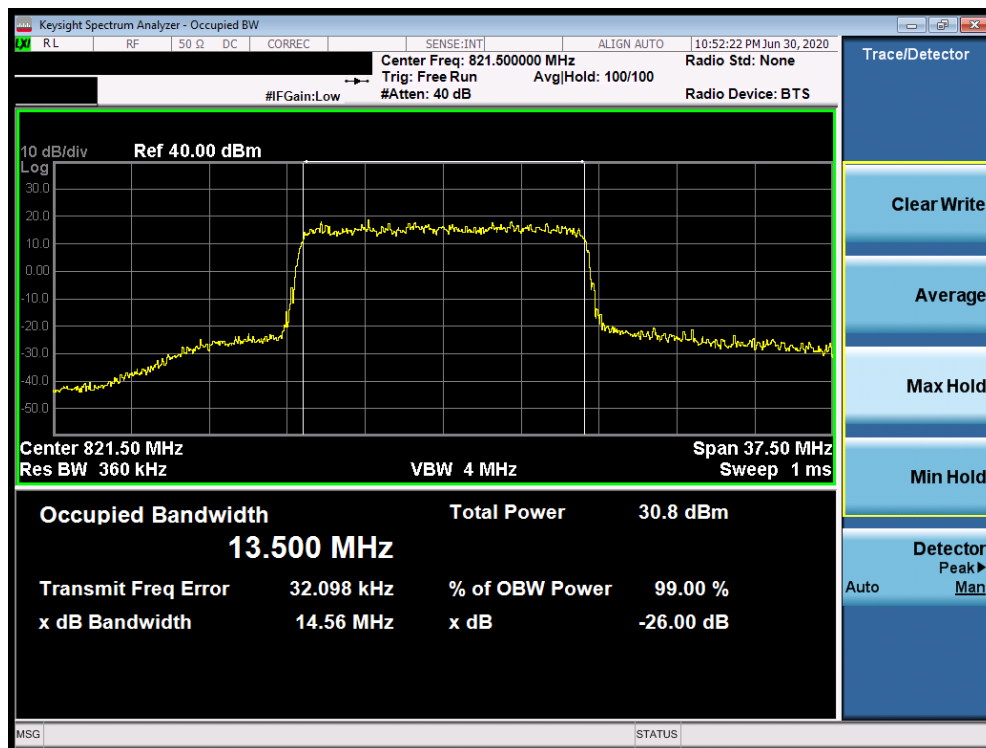


Plot 7-20. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 23 of 66

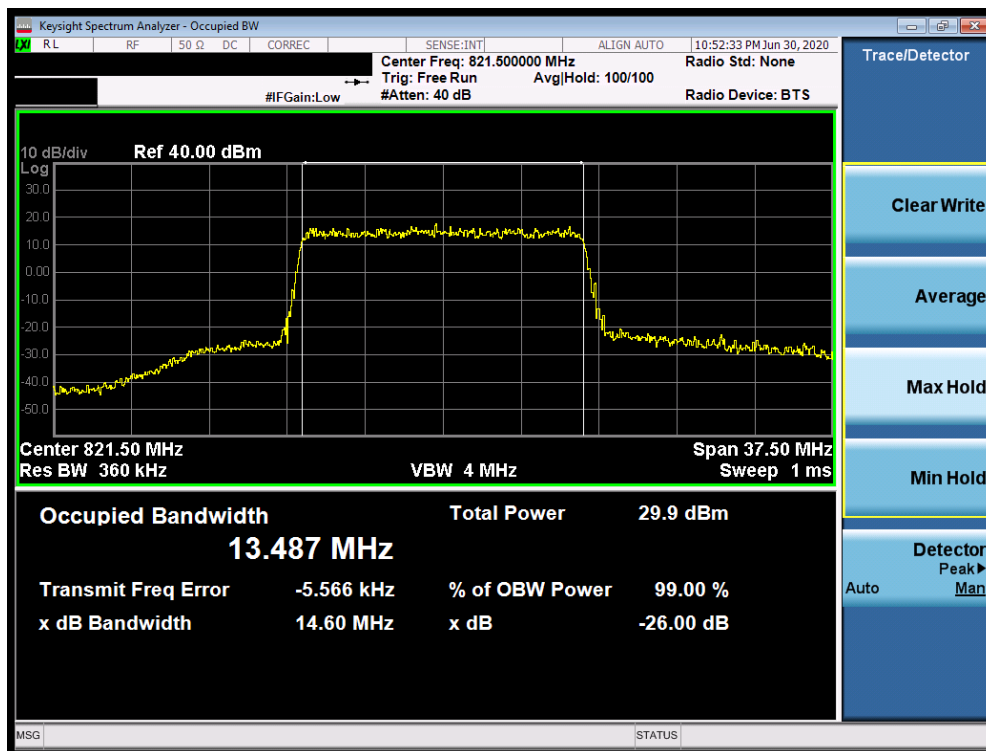


Plot 7-21. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 64-QAM - Full RB Configuration)

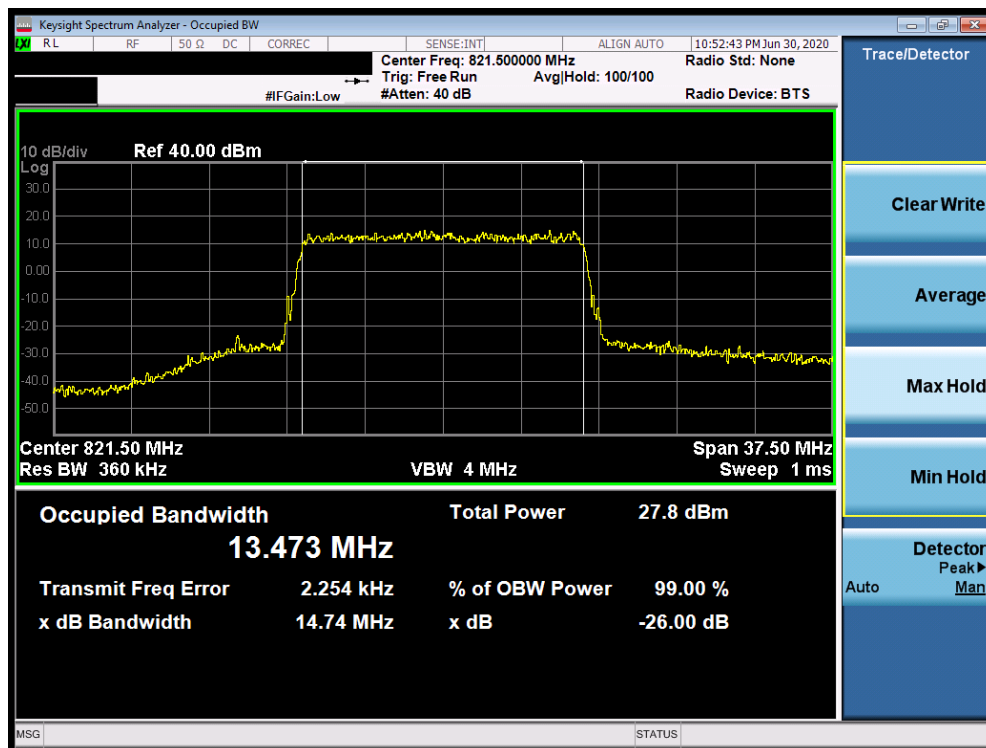


Plot 7-22. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 24 of 66

LTE Band 14

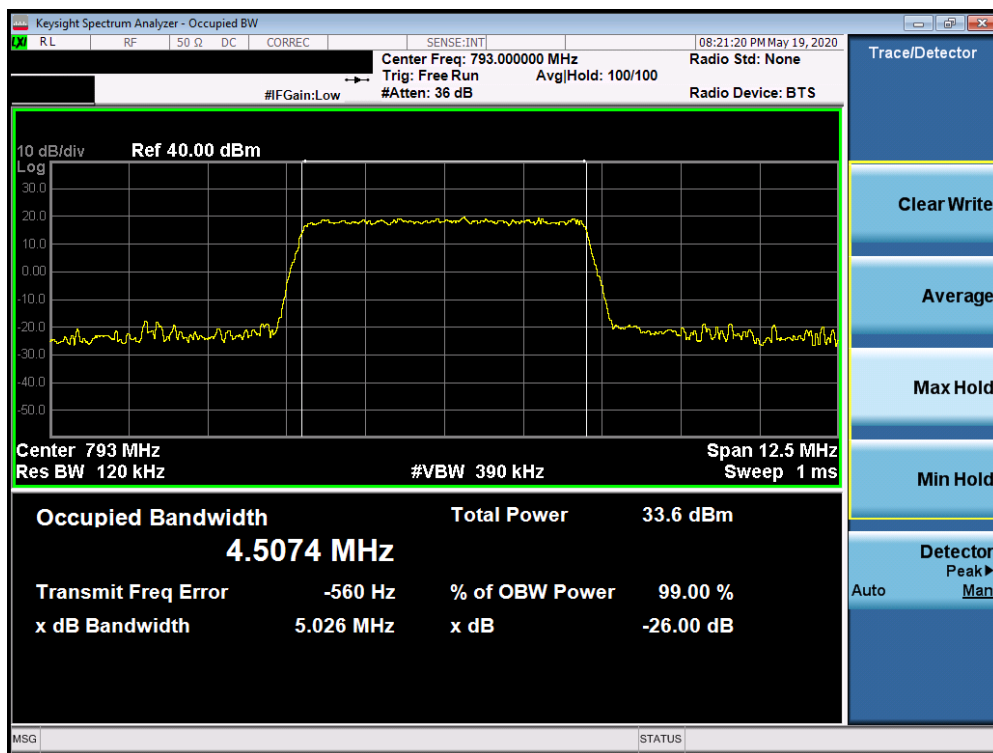


Plot 7-23. Occupied Bandwidth Plot (LTE Band 14 - 5MHz QPSK - Full RB Configuration)

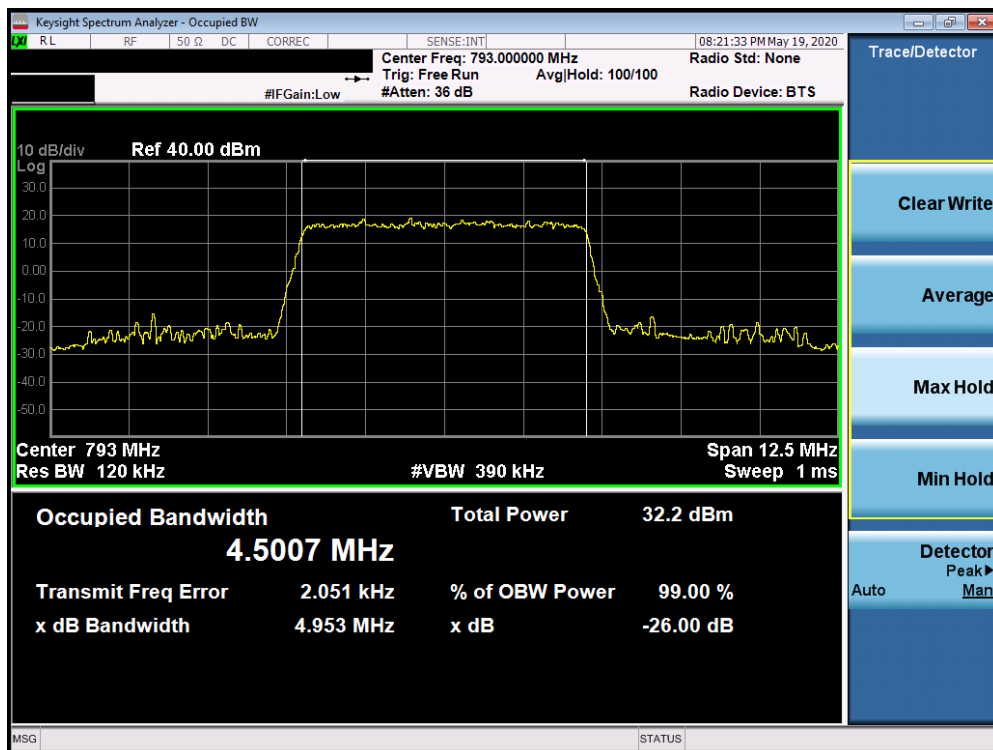


Plot 7-24. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF070U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 25 of 66

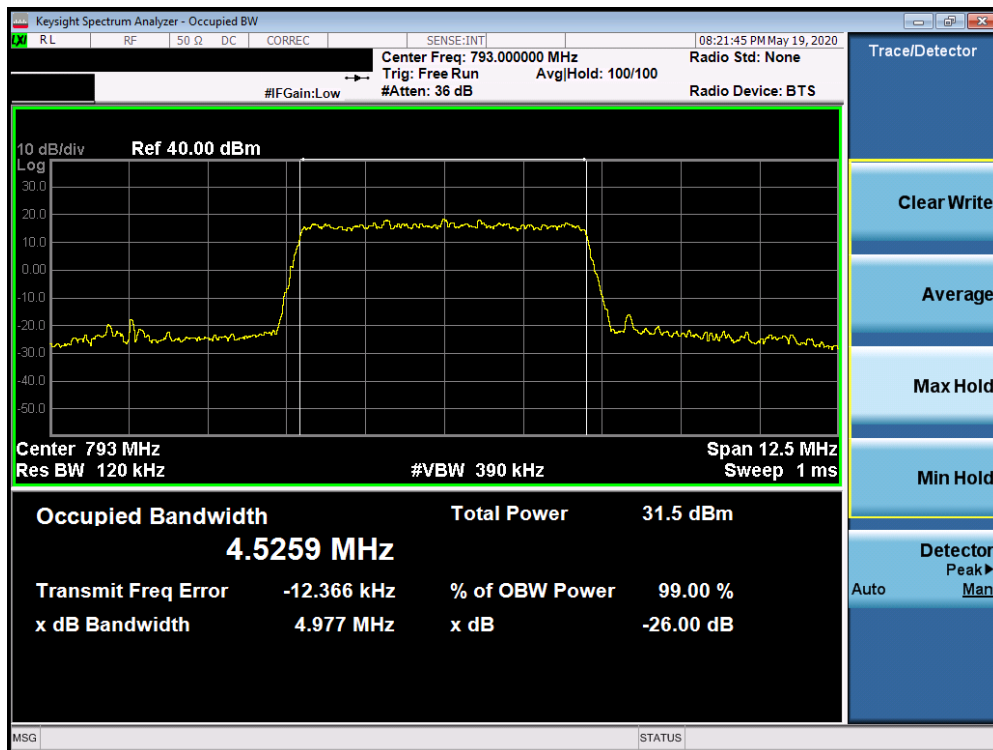


Plot 7-25. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 64-QAM - Full RB Configuration)

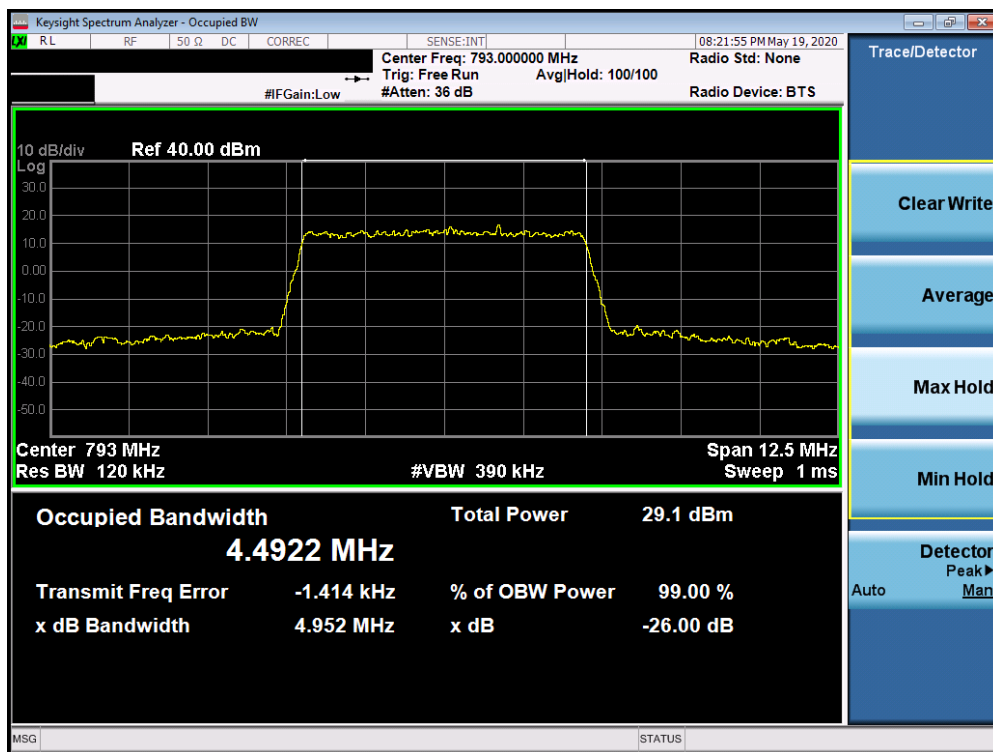


Plot 7-26. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 26 of 66

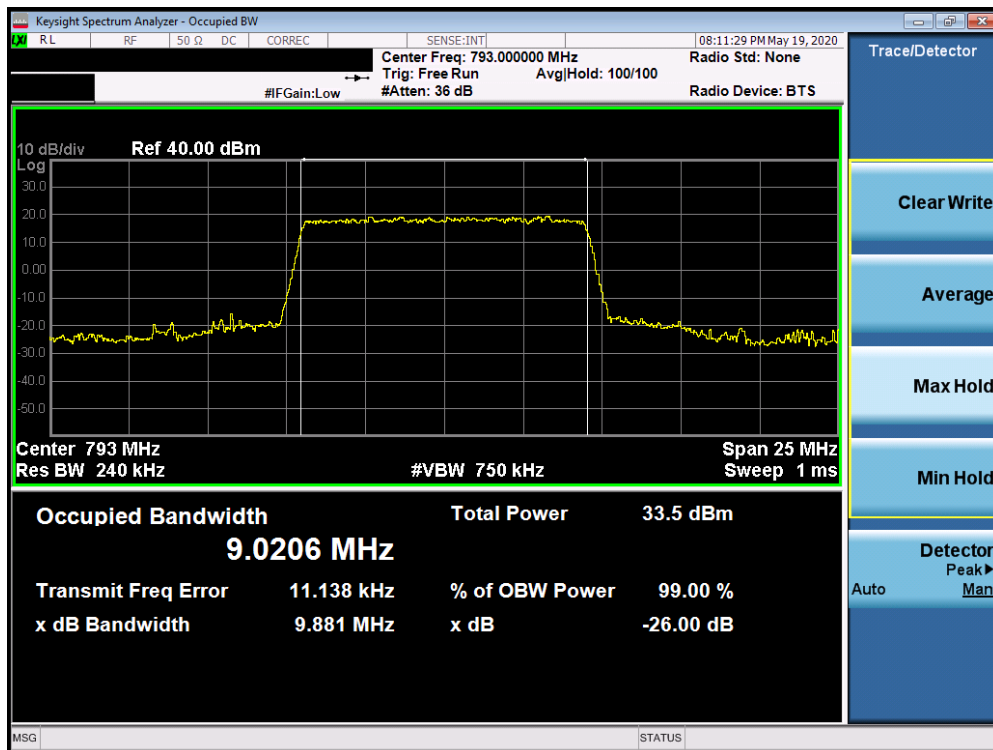


Plot 7-27. Occupied Bandwidth Plot (LTE Band 14 - 10MHz QPSK - Full RB Configuration)

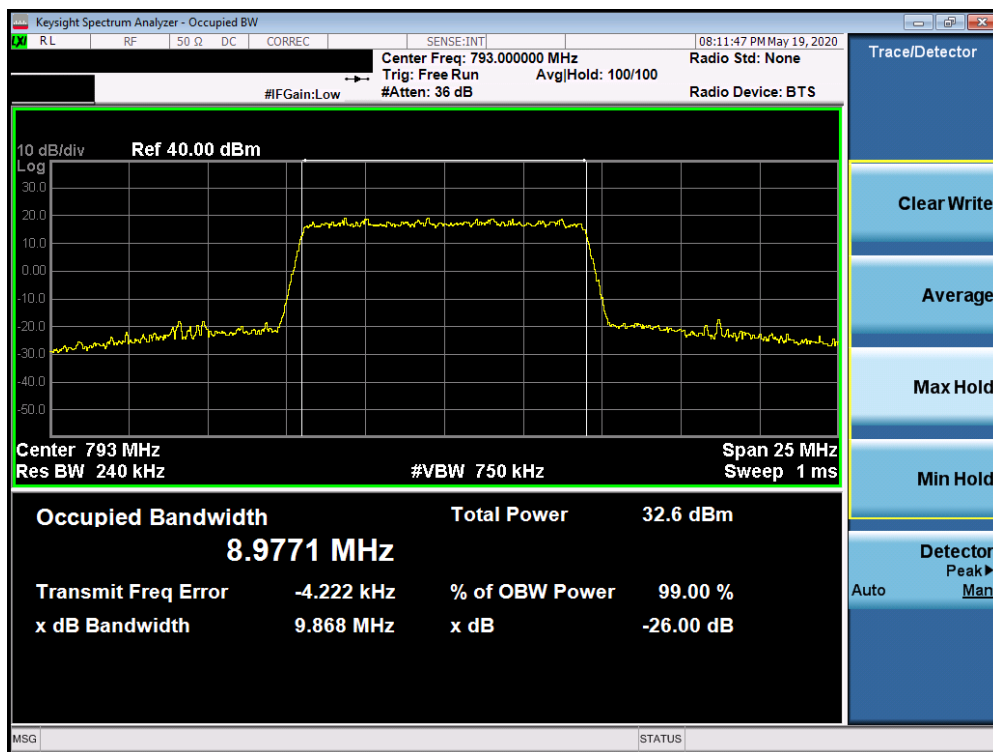


Plot 7-28. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 27 of 66

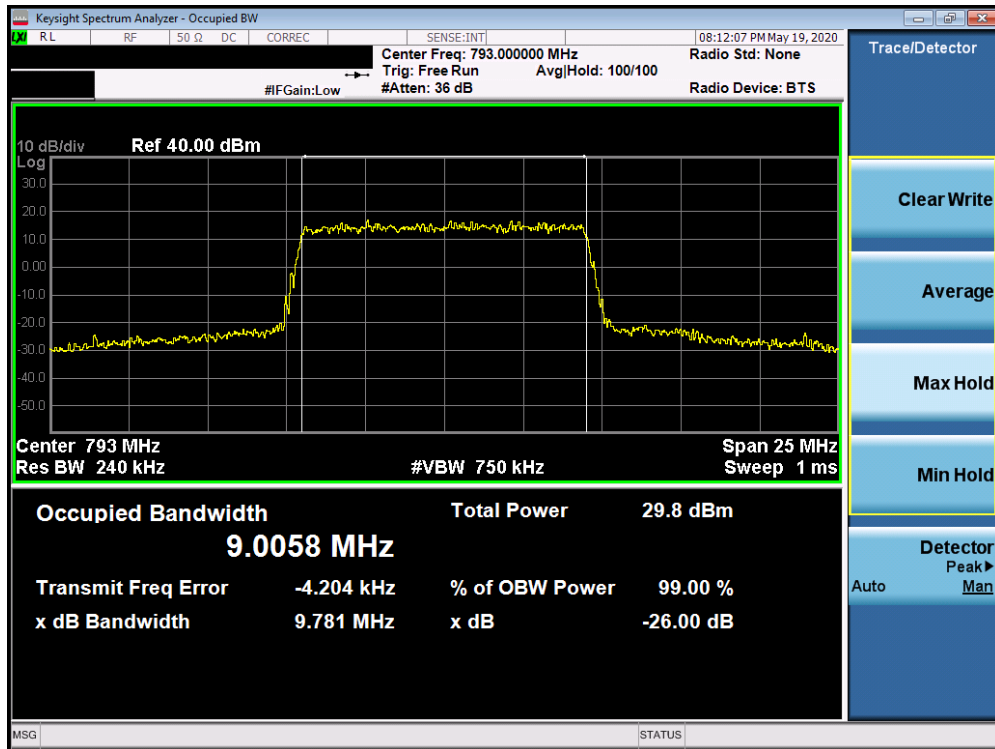

Plot 7-29. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 64-QAM - Full RB Configuration)

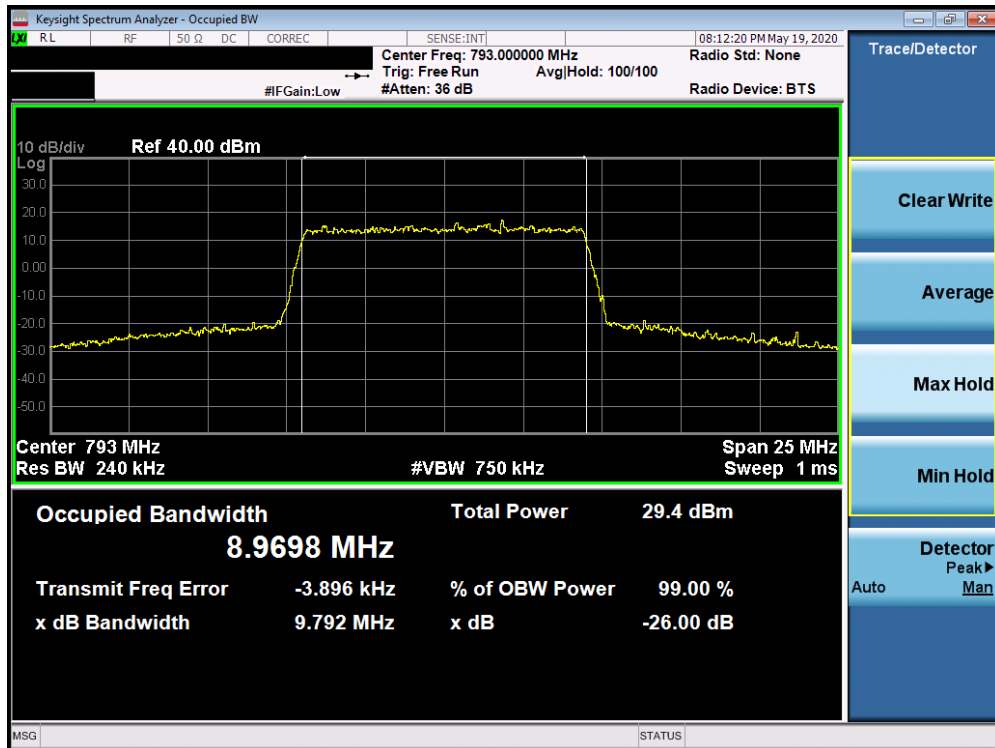

Plot 7-30. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 28 of 66

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90(S).691(a) §90(R).543(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW $\geq$ 100kHz
3. VBW $\geq$ 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

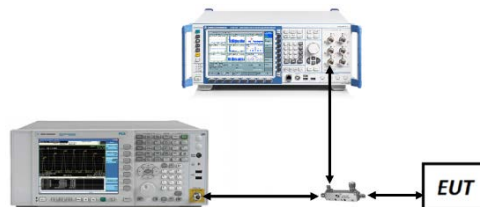



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 29 of 66

CDMA BC10

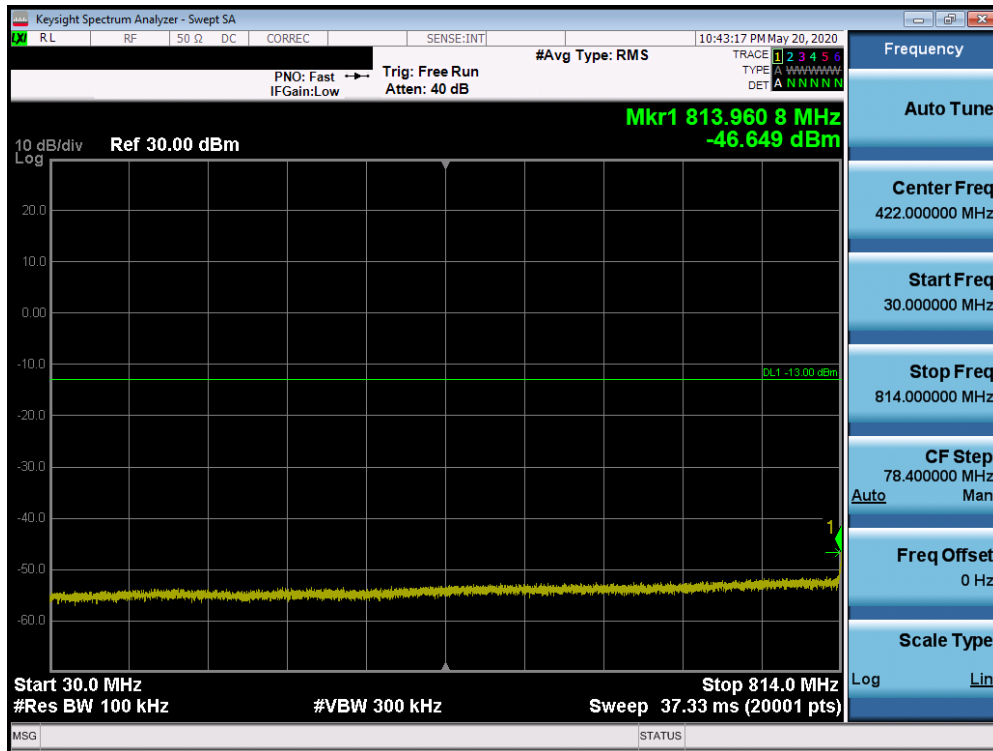

Plot 7-31. Conducted Spurious Plot (CDMA Ch. 476- Low Channel)

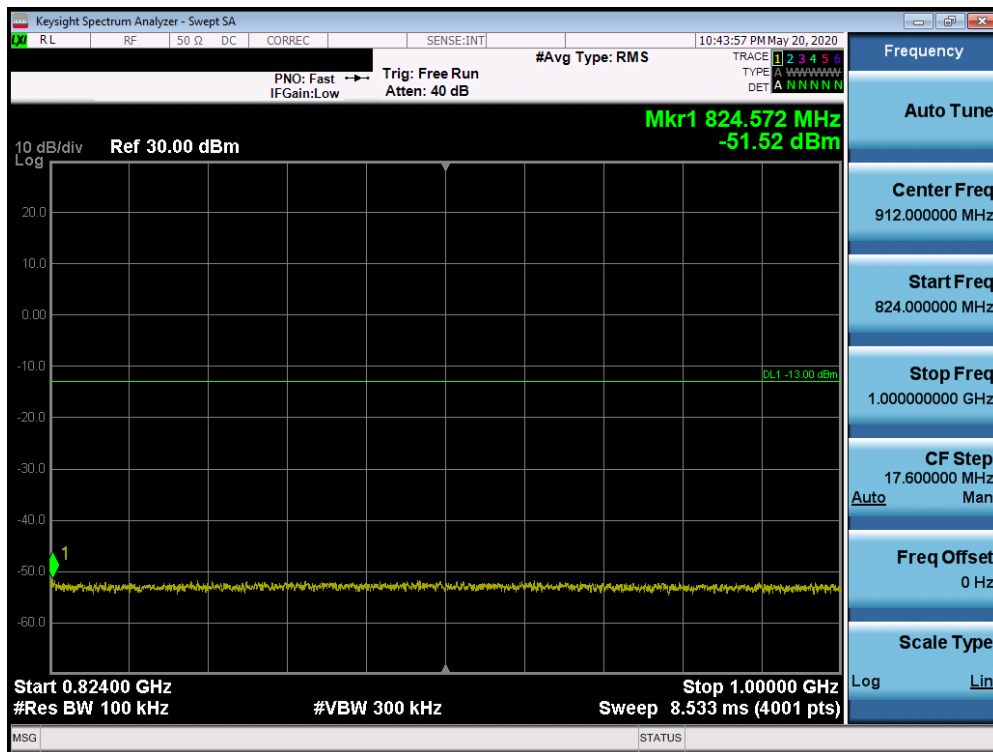


Plot 7-31. Conducted Spurious Plot (CDMA Ch. 476- Low Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 30 of 66




Plot 7-31. Conducted Spurious Plot (CDMA Ch. 476- Low Channel)

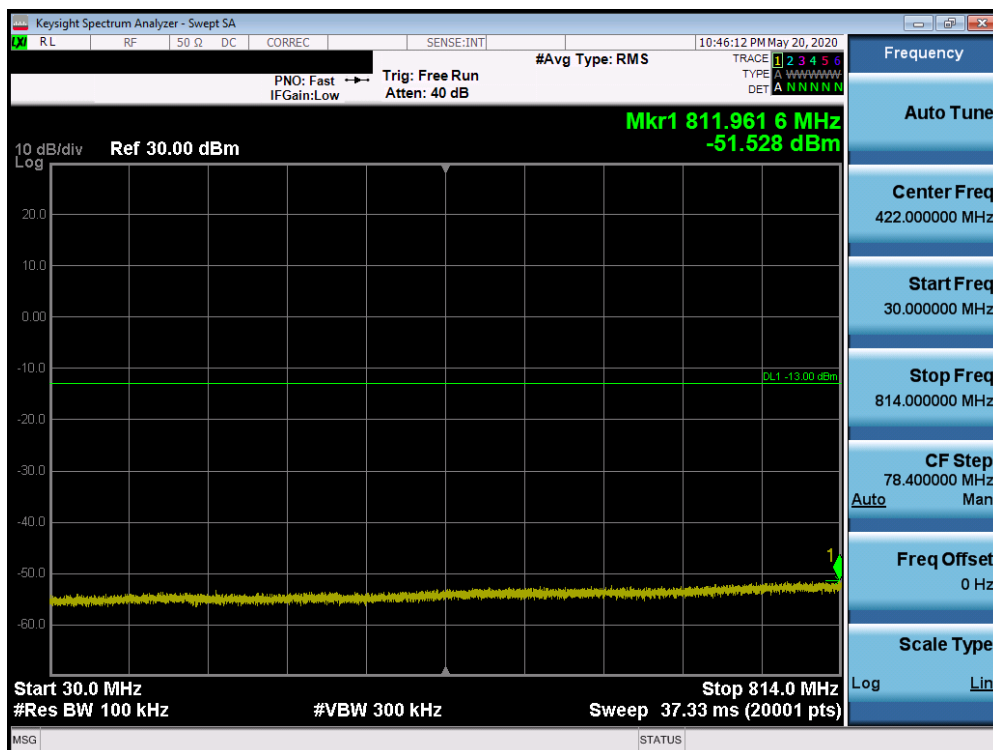

Plot 7-31. Conducted Spurious Plot (CDMA Ch. 684- High Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 31 of 66

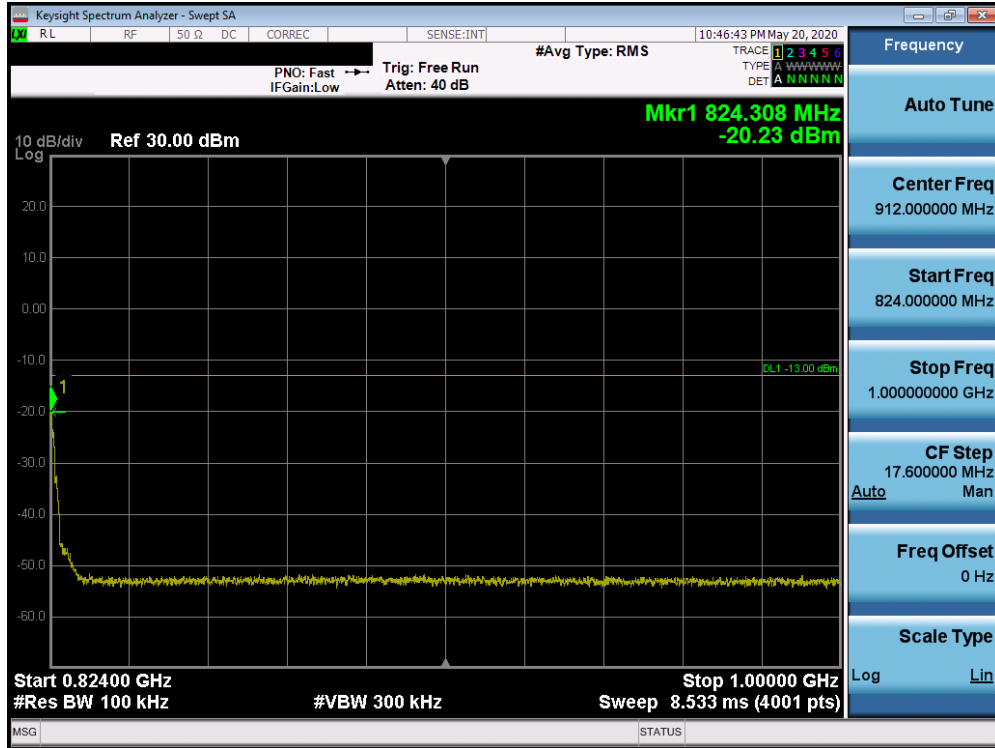


Plot 7-31. Conducted Spurious Plot (CDMA Ch. 684- High Channel)




Plot 7-31. Conducted Spurious Plot (CDMA Ch. 684- High Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 32 of 66

LTE Band 26

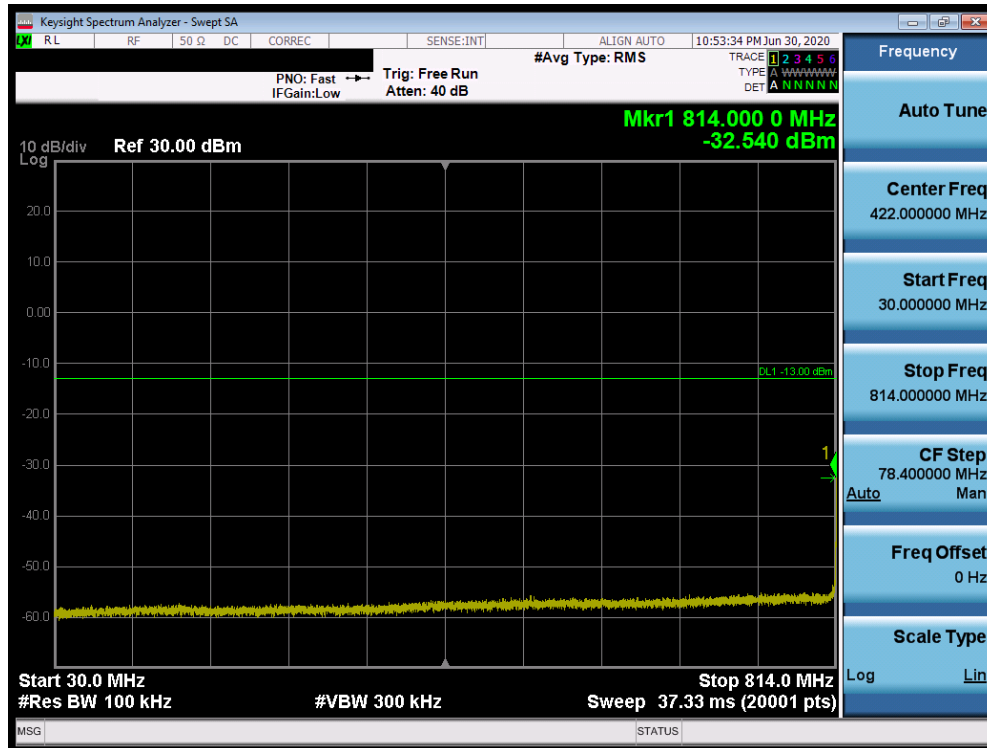


Plot 7-31. Conducted Spurious Plot (LTE Band 26 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

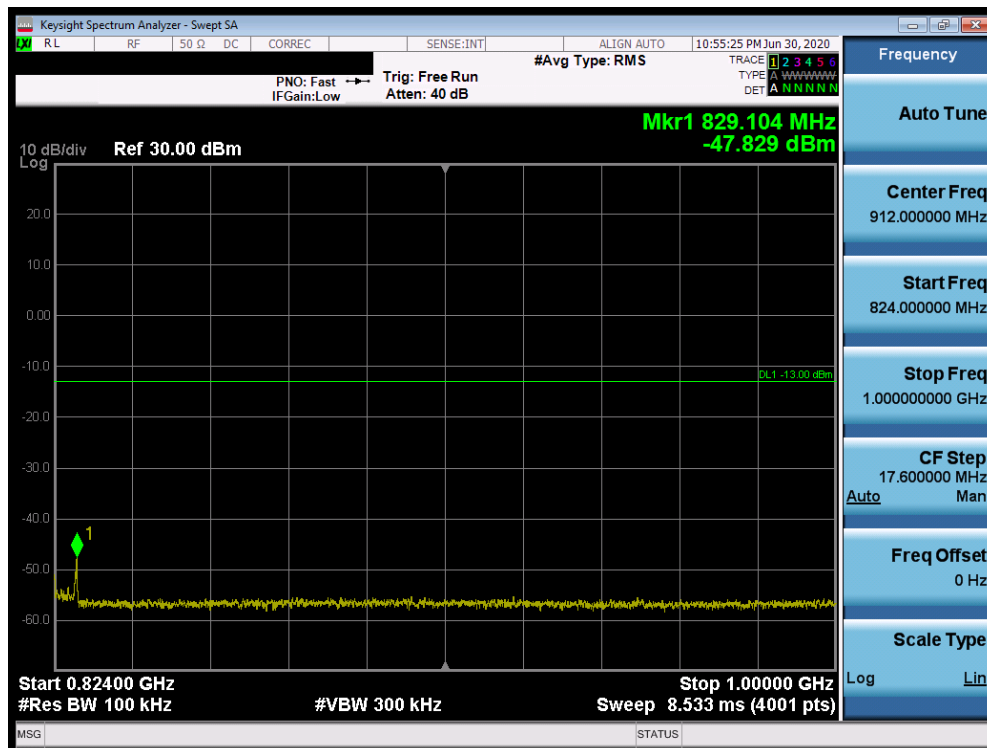

Plot 7-32. Conducted Spurious Plot (LTE Band 26 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)


FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 33 of 66

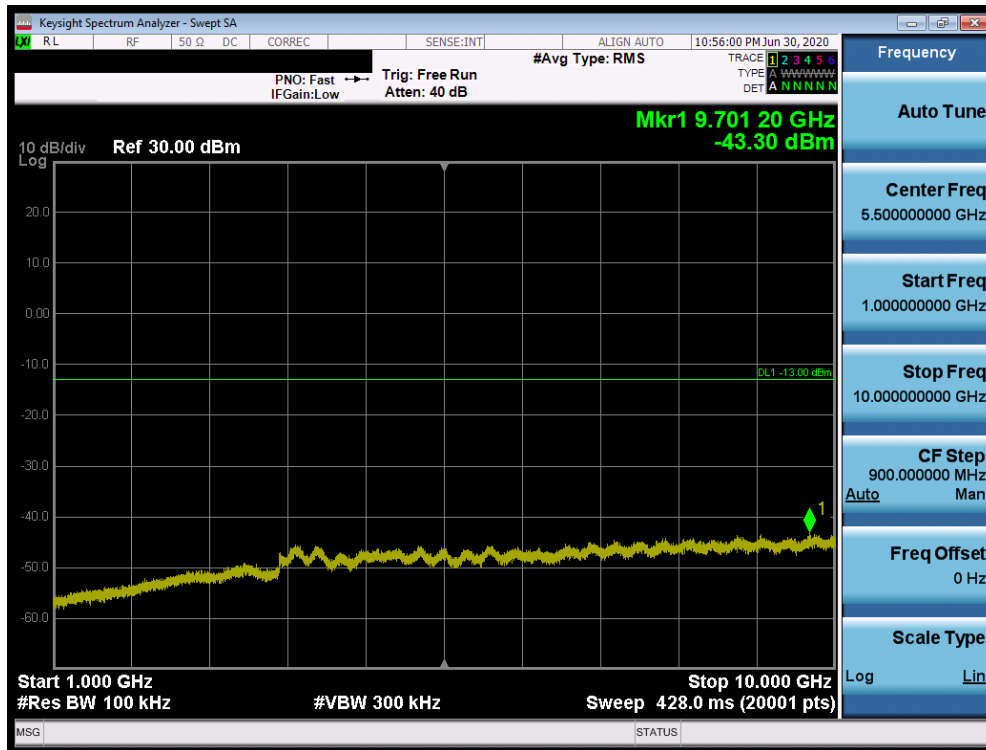


Plot 7-33. Conducted Spurious Plot (LTE Band 26 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 34 of 66

LTE Band 14

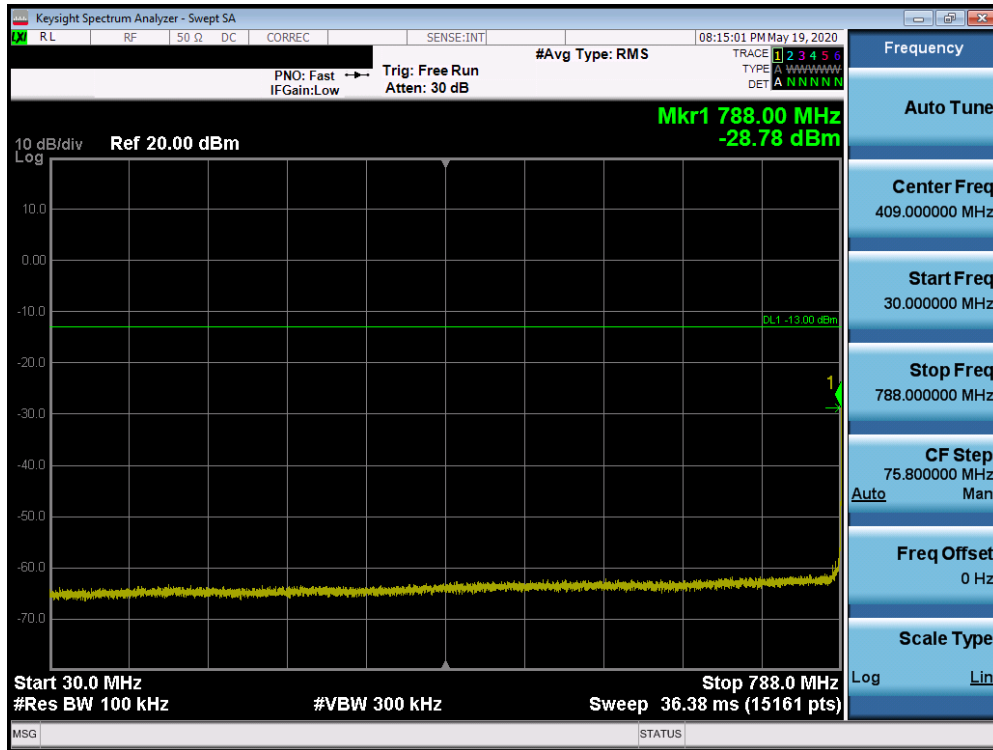


Plot 7-34. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

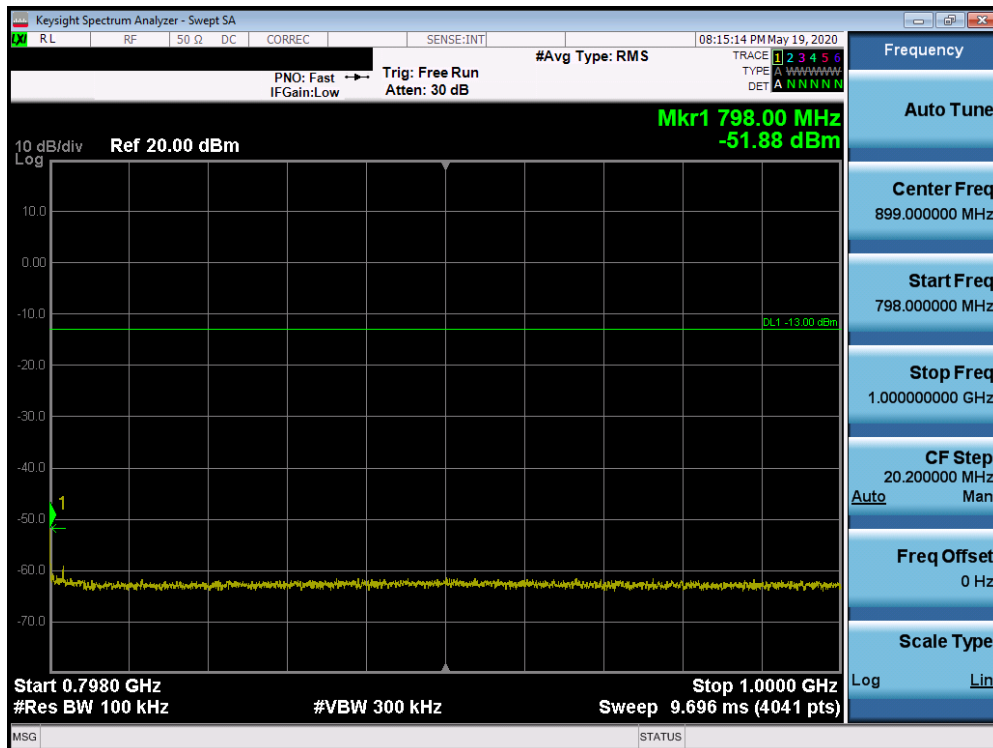

Plot 7-35. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 35 of 66

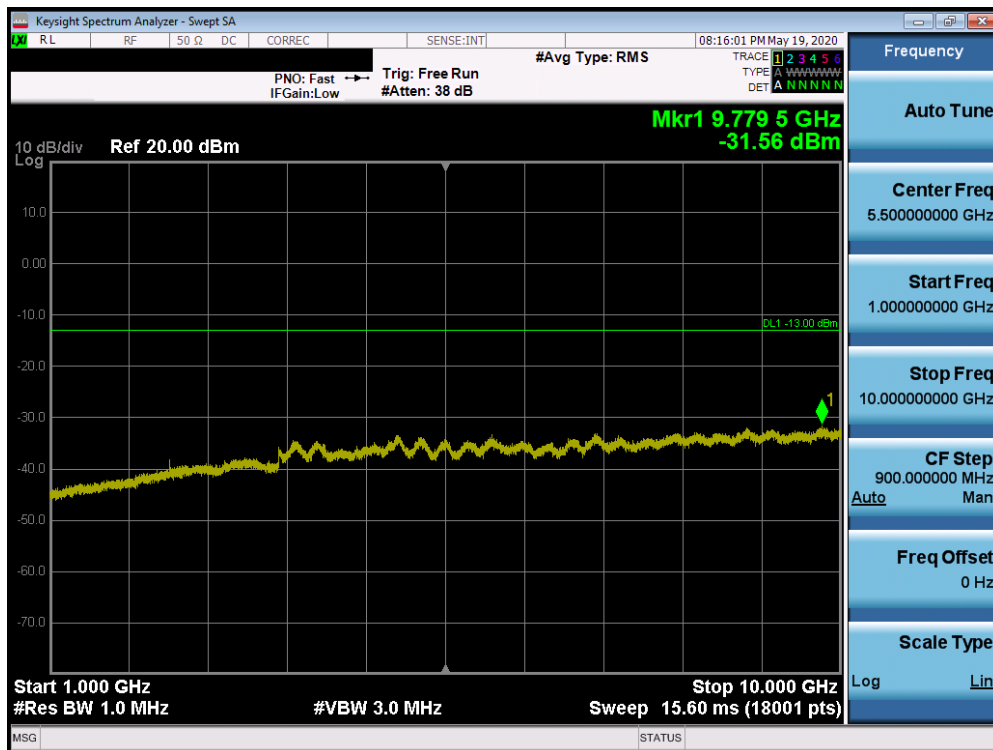

Plot 7-36. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 36 of 66

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.691(a) §90.543(e)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

For LTE B14 operation under Part 90.543, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz. On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10\log(P)$ dB.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

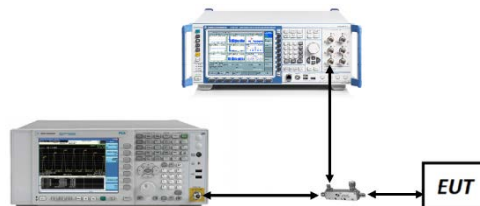


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 37 of 66

Test Notes

For channel edge emission, the signal analyzer's "ACP" measurement capability is used.


Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

For LTE Band 14 operation under Part 90.543, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.

Additionally, for LTE Band 14 operation, on all frequencies between 769-775 MHz and 799-805 MHz, the power of any emission shall be attenuated by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

FCC ID: A3LSMF707U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 38 of 66

CDMA BC10

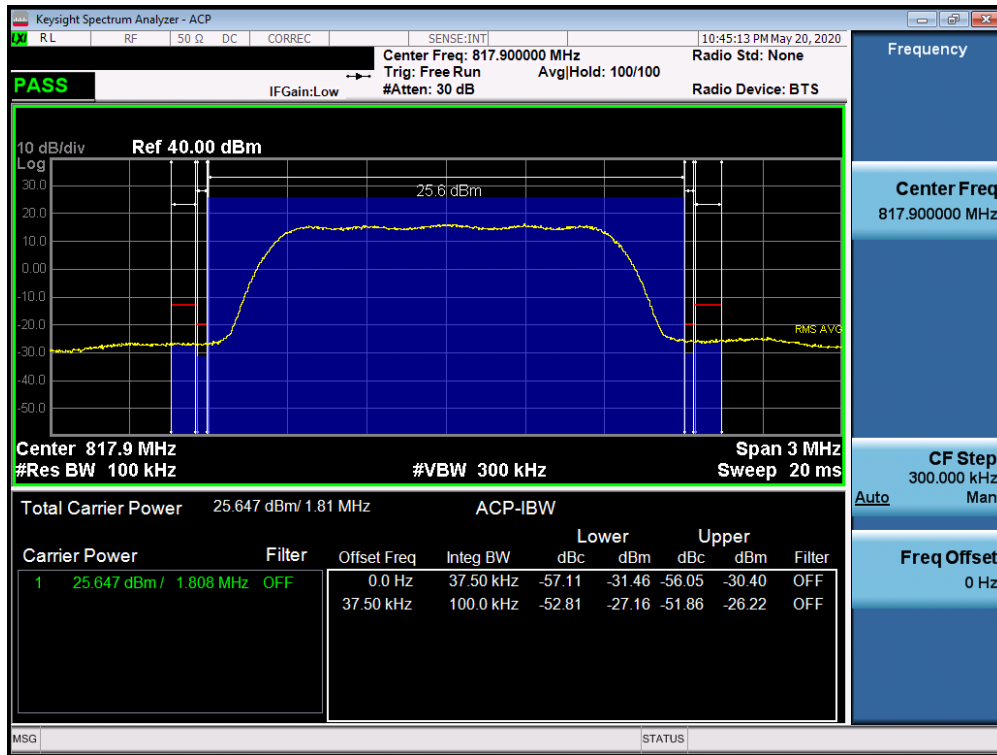


Plot 7-37. Channel Edge Plot (CDMA BC10 – Ch. 476)




Plot 7-38. Channel Edge Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMF707U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 39 of 66	

LTE Band 26

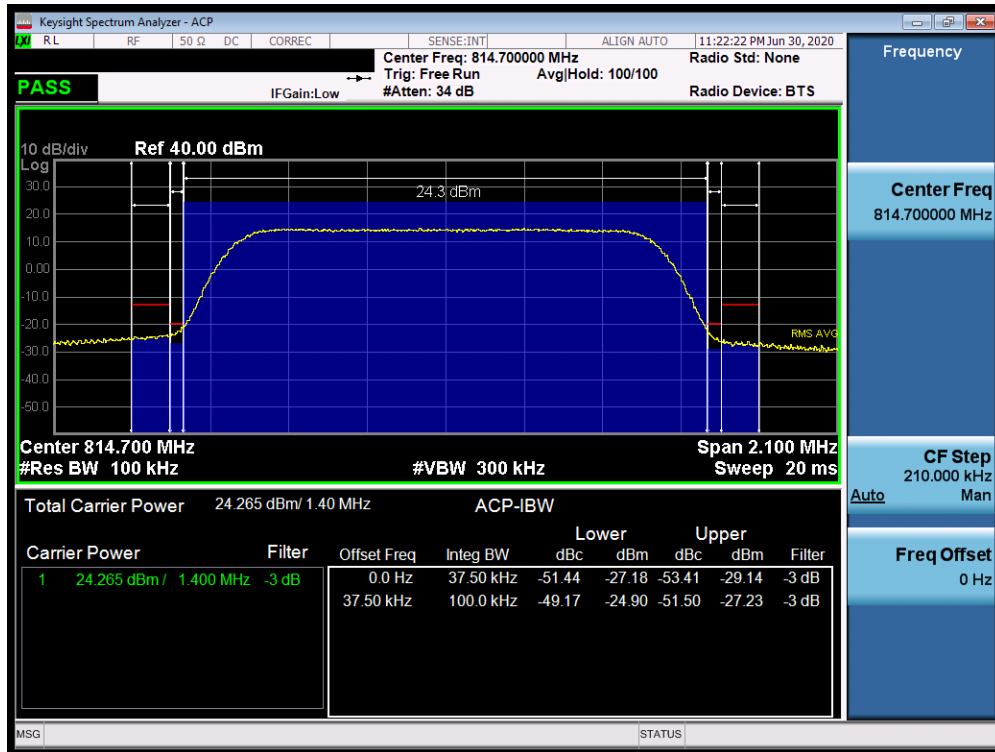


Plot 7-39. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Low Channel)

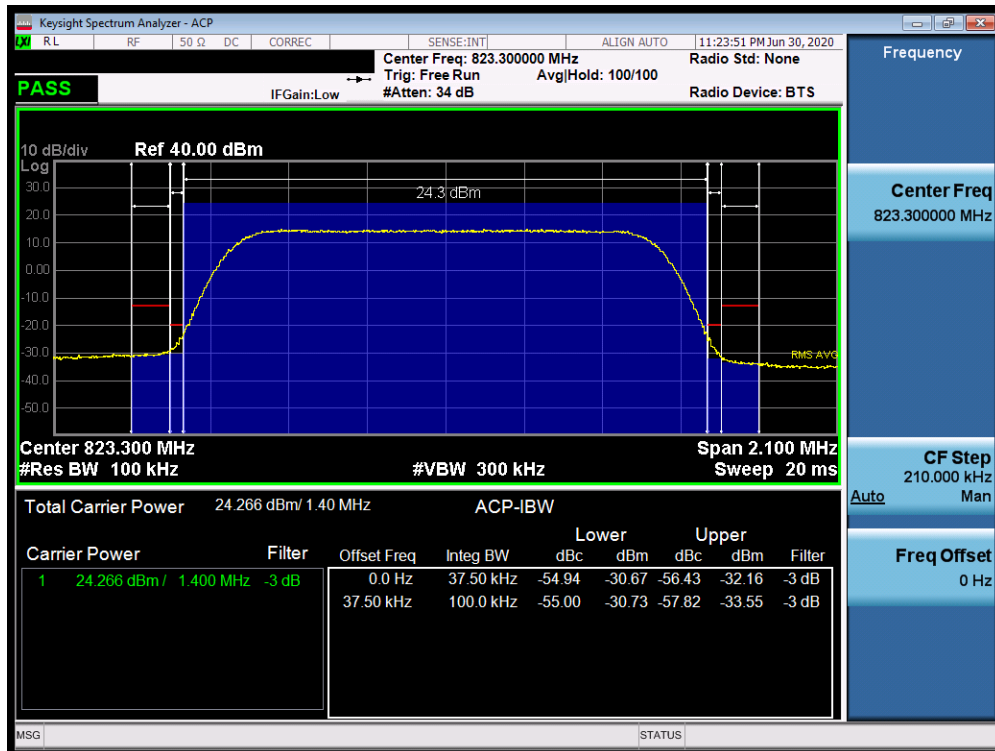


Plot 7-40. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - High Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 40 of 66

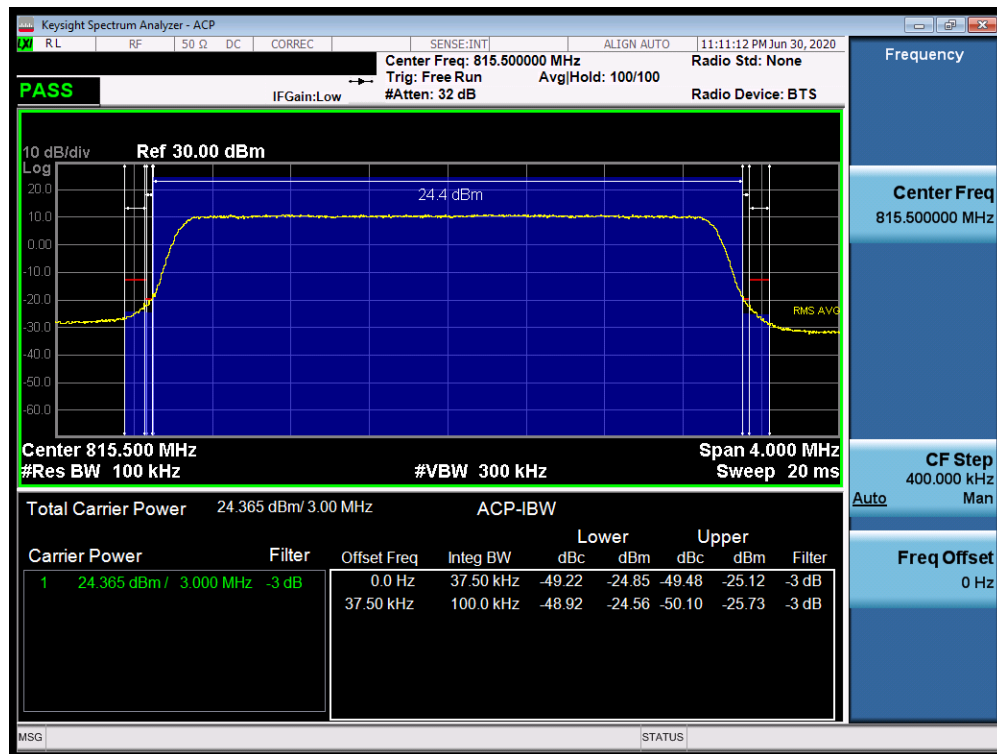


Plot 7-41. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Low Channel)

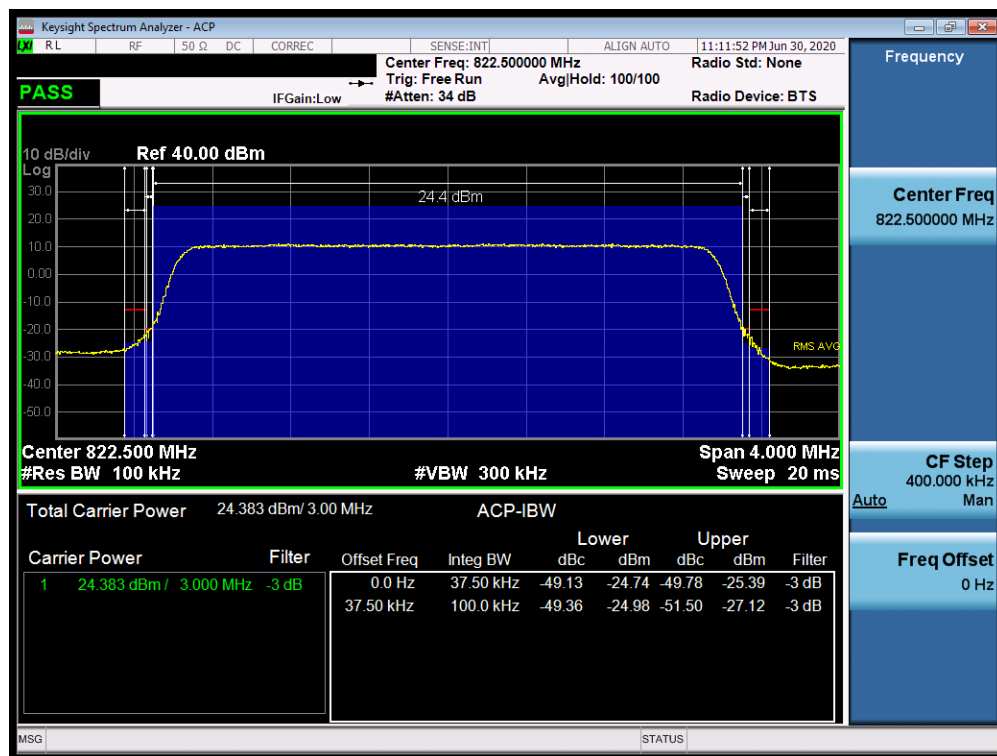


Plot 7-42. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - High Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 41 of 66

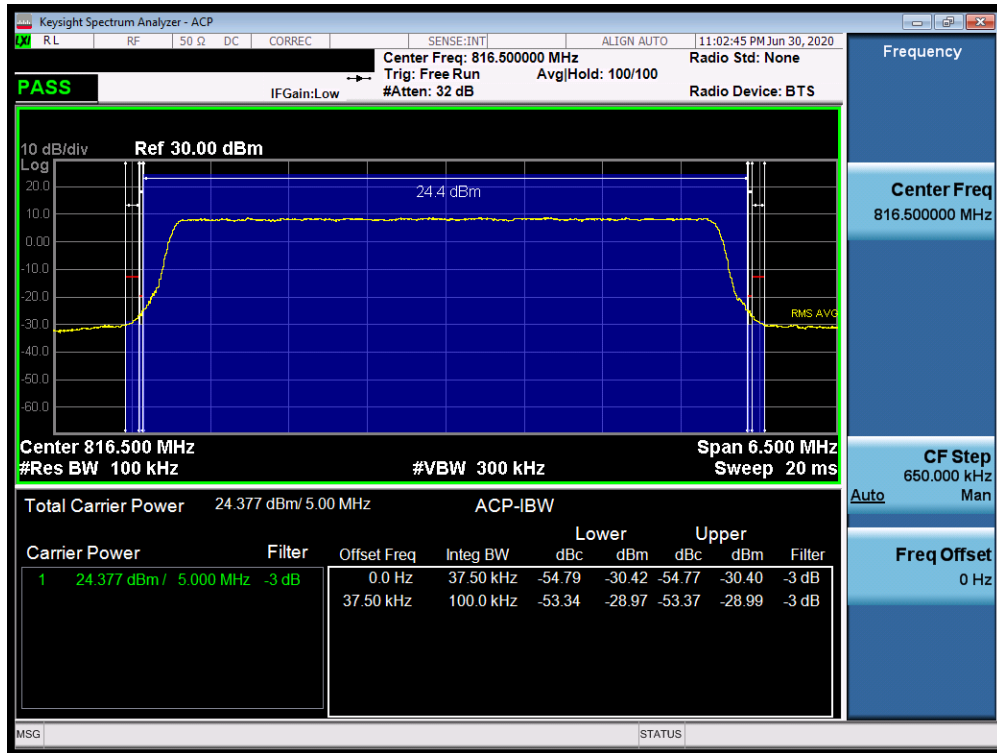


Plot 7-43. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Low Channel)

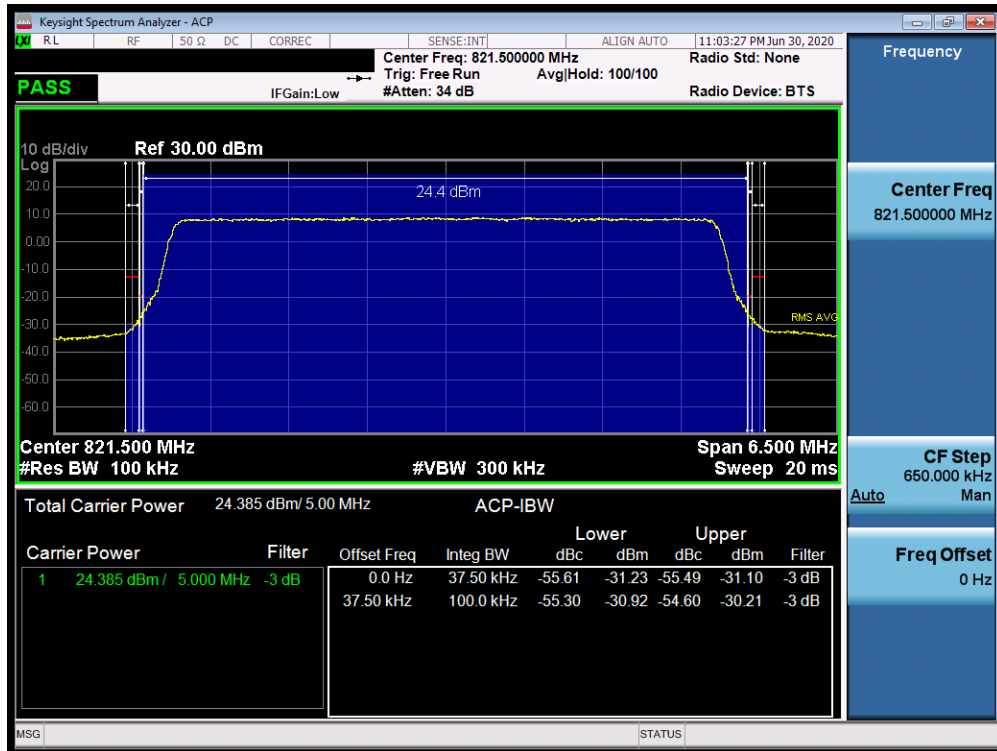


Plot 7-44. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - High Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 42 of 66

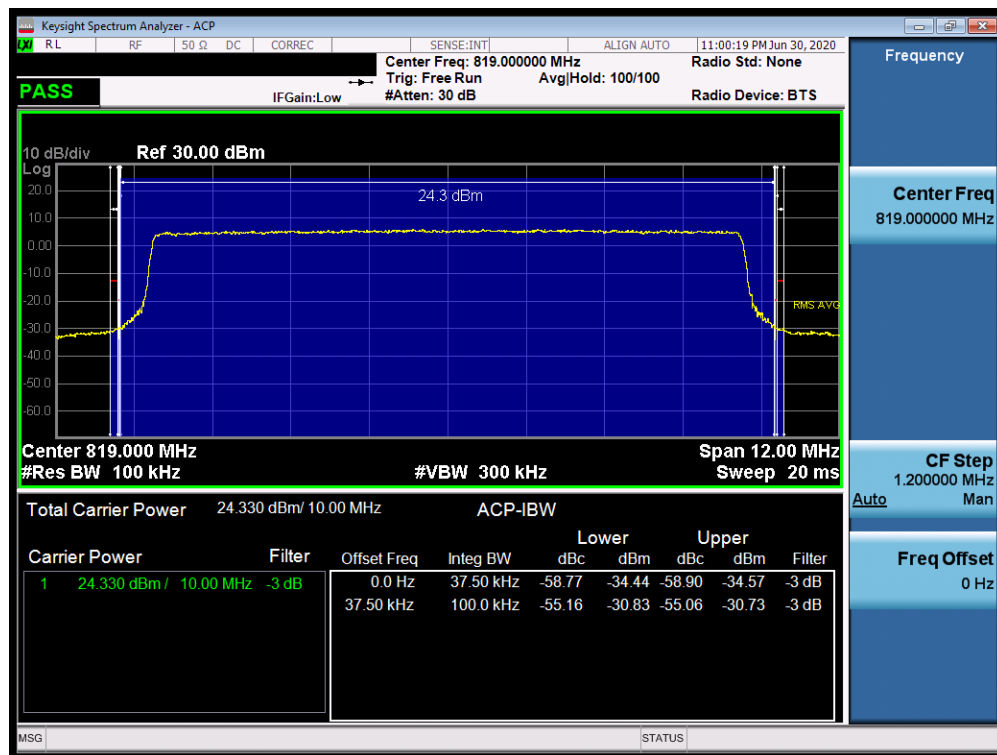


Plot 7-45. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Mid Channel)

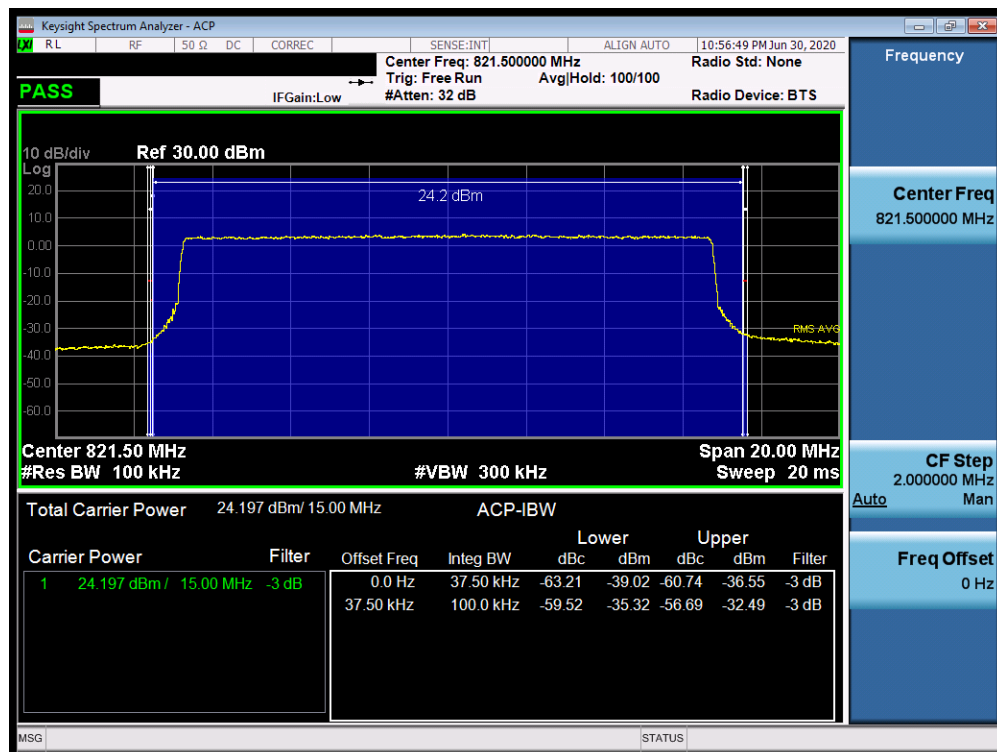


Plot 7-46. Channel Edge Plot (LTE Band 26 - 15MHz QPSK - Mid Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 43 of 66

LTE Band 14

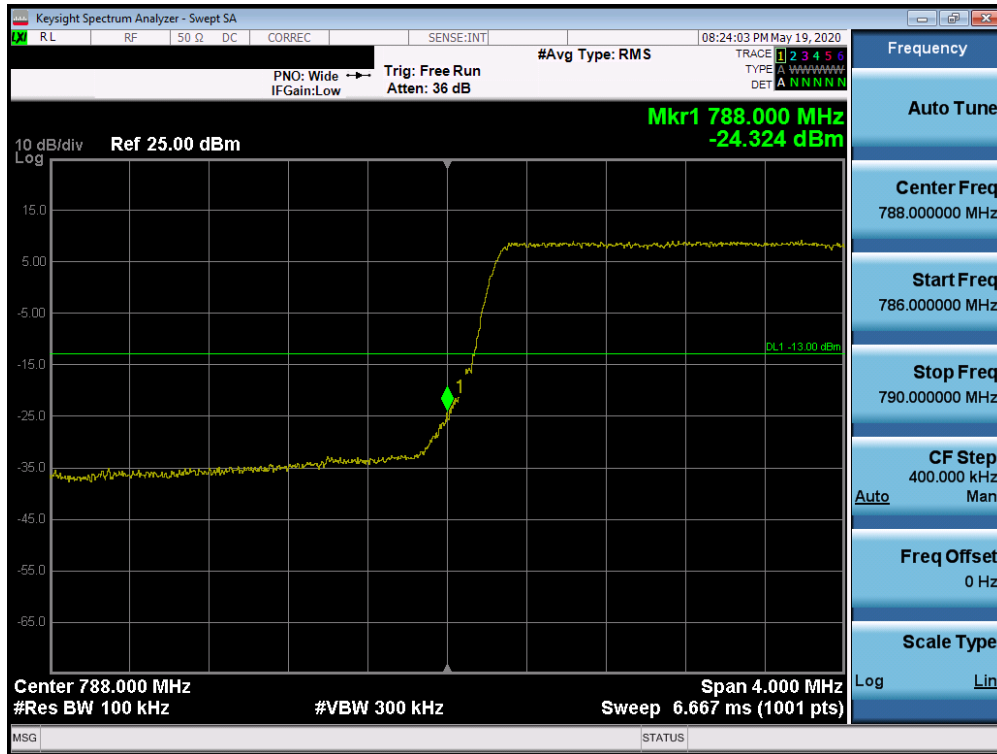

Plot 7-47. Lower Band Edge Plot (LTE Band 14, 5MHz QPSK - RB Size 25)

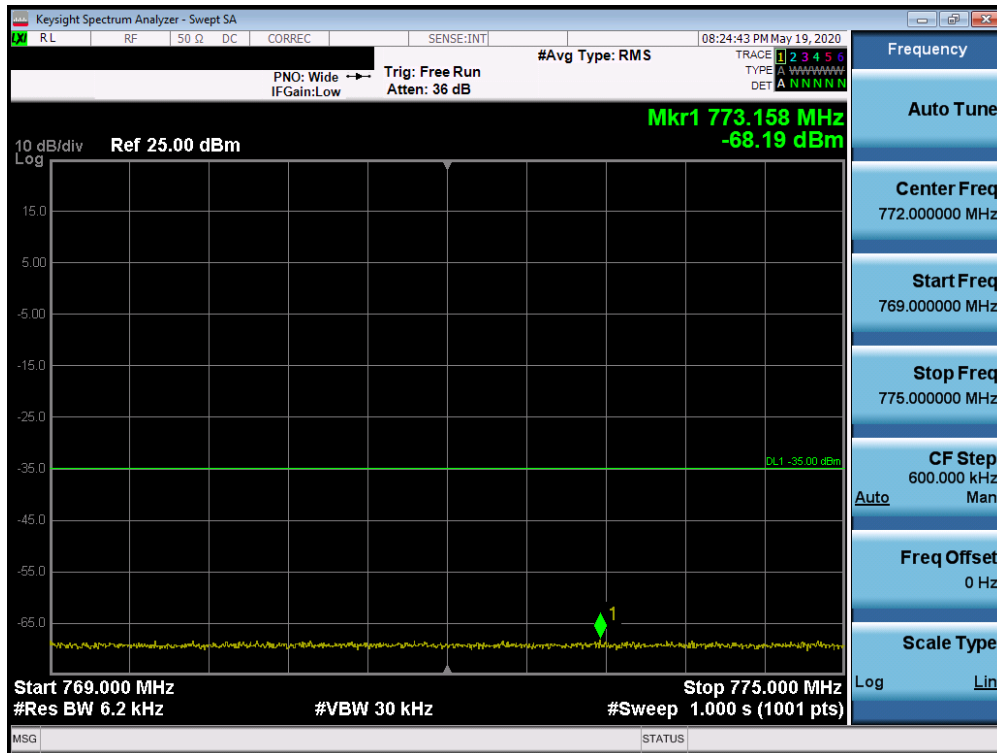

Plot 7-48. Lower Emission Mask Plot (LTE Band 14, 5MHz QPSK - RB Size 25)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 44 of 66




Plot 7-49. Upper Band Edge Plot (LTE Band 14, 5MHz QPSK - RB Size 25)




Plot 7-50. Upper Emission Mask Plot (LTE Band 14, 5MHz QPSK - RB Size 25)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 45 of 66

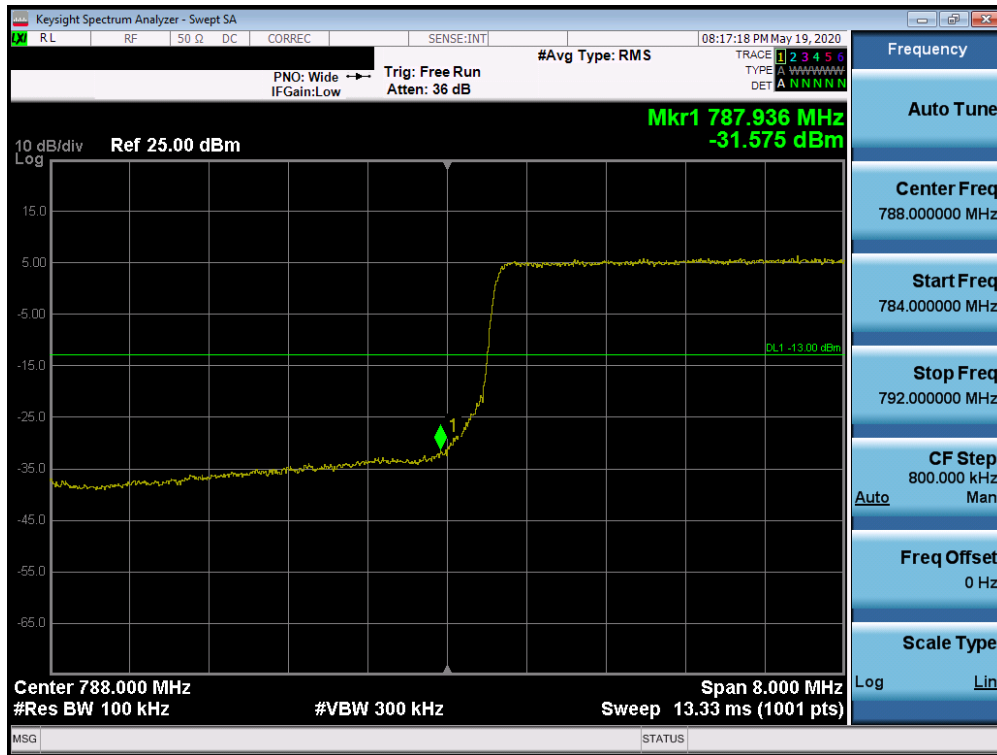

Plot 7-51. Lower Band Edge Plot (LTE Band 14, 10MHz QPSK - RB Size 50)

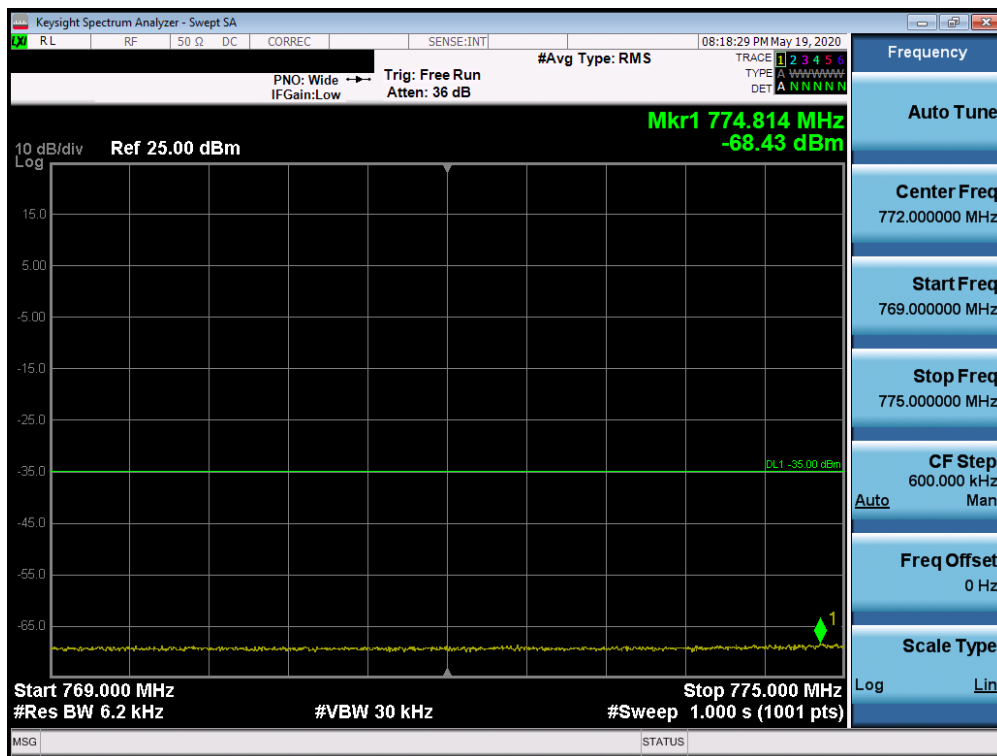

Plot 7-52. Lower Emission Mask Plot (LTE Band 14, 10MHz QPSK - RB Size 50)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04-A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 46 of 66



Plot 7-53. Upper Band Edge Plot (LTE Band 14, 10MHz QPSK - RB Size 50)



Plot 7-54. Upper Emission Mask Plot (LTE Band 14, 10MHz QPSK - RB Size 50)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 47 of 66

7.5 Conducted Power Output Data

§2.1046 §90.635

Frequency [MHz]	Channel	Battery Type	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
817.90	476	Standard	24.54	0.284	50.00	-25.46
823.10	684	Standard	25.08	0.322	50.00	-24.92

Table 7-2. CDMA BC10 Conducted Power Output Data

FCC ID: A3LSMF707U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 48 of 66

Bandwidth	Modulation	Channel	Frequency [MHz]	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
15 MHz	QPSK	26765	821.5	25.28	0.337	50.00	-24.72
	16-QAM	26765	821.5	24.68	0.294	50.00	-25.32
	64-QAM	26765	821.5	23.08	0.203	50.00	-26.92
	256-QAM	26765	821.5	20.25	0.106	50.00	-29.75
10 MHz	QPSK	26740	819.0	25.48	0.353	50.00	-24.52
	16-QAM	26740	819.0	24.76	0.299	50.00	-25.24
	64-QAM	26740	819.0	23.00	0.200	50.00	-27.00
	256-QAM	26740	819.0	20.28	0.107	50.00	-29.72
5 MHz	QPSK	26715	816.5	25.18	0.330	50.00	-24.82
		26765	821.5	25.37	0.344	50.00	-24.63
	16-QAM	26715	816.5	24.52	0.283	50.00	-25.48
		26765	821.5	24.72	0.296	50.00	-25.28
	64-QAM	26715	816.5	22.82	0.191	50.00	-27.18
		26765	821.5	23.22	0.210	50.00	-26.78
	256-QAM	26715	816.5	20.61	0.115	50.00	-29.39
		26765	821.5	20.47	0.111	50.00	-29.53
3 MHz	QPSK	26705	815.5	25.31	0.340	50.00	-24.69
		26775	822.5	25.37	0.344	50.00	-24.63
	16-QAM	26705	815.5	24.64	0.291	50.00	-25.36
		26775	822.5	24.71	0.296	50.00	-25.29
	64-QAM	26705	815.5	22.75	0.188	50.00	-27.25
		26775	822.5	23.65	0.232	50.00	-26.35
	256-QAM	26705	815.5	20.50	0.112	50.00	-29.50
		26775	822.5	20.53	0.113	50.00	-29.47
1.4 MHz	QPSK	26697	814.7	25.22	0.333	50.00	-24.78
		26783	823.3	25.23	0.333	50.00	-24.77
	16-QAM	26697	814.7	24.59	0.288	50.00	-25.41
		26783	823.3	24.65	0.292	50.00	-25.35
	64-QAM	26697	814.7	22.91	0.195	50.00	-27.09
		26783	823.3	23.52	0.225	50.00	-26.48
	256-QAM	26697	814.7	20.48	0.112	50.00	-29.52
		26783	823.3	20.57	0.114	50.00	-29.43

Table 7-3. LTE Band 26 Conducted Power Output Data

NOTES:

- For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
- This unit was tested with its standard battery.

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 49 of 66

7.6 Radiated Power (ERP)

§22.913(a.2) §90.542(a)(7)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF707U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 50 of 66	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

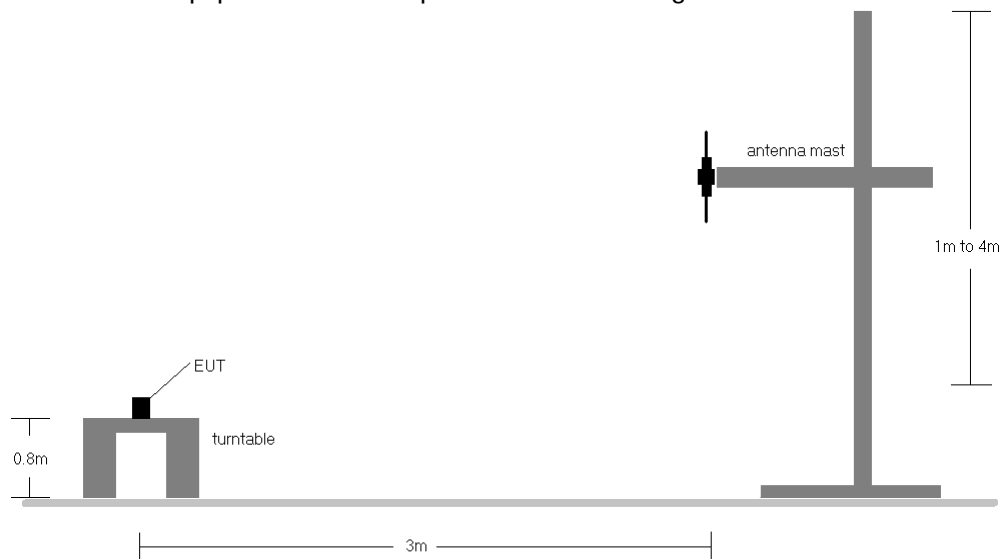


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 51 of 66

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
821.50	15	QPSK	V	138	264	1 / 74	14.61	6.32	18.78	0.076	38.45	-19.67
821.50	15	16-QAM	V	138	264	1 / 74	13.51	6.32	17.68	0.059	38.45	-20.77
821.50	15	64-QAM	V	138	264	1 / 74	12.79	6.32	16.96	0.050	38.45	-21.49
821.50	15	256-QAM	V	138	264	1 / 74	10.51	6.32	14.68	0.029	38.45	-23.77
821.50	15	QPSK	H	148	256	1 / 0	10.15	6.32	14.32	0.027	38.45	-24.13
821.50	15 (WCP)	QPSK	V	248	149	1 / 74	10.20	6.32	14.37	0.027	38.45	-24.08

Table 7-55. ERP Data (Band 26)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
790.50	5	QPSK	H	155	298	1 / 0	12.95	6.09	16.88	0.049	34.77	-17.89	19.03	0.080	36.99	-17.96
793.00	5	QPSK	H	152	296	1 / 0	13.09	6.11	17.05	0.051	34.77	-17.72	19.20	0.083	36.99	-17.78
795.50	5	QPSK	H	154	289	1 / 0	13.03	6.24	17.12	0.051	34.77	-17.65	19.27	0.084	36.99	-17.72
793.00	5	16-QAM	H	152	296	1 / 0	12.35	6.11	16.31	0.043	34.77	-18.46	18.46	0.070	36.99	-18.52
795.50	5	64-QAM	H	154	289	1 / 0	11.70	6.24	15.79	0.038	34.77	-18.98	17.94	0.062	36.99	-19.05
793.00	5	256-QAM	H	152	296	1 / 0	11.83	6.11	15.79	0.038	34.77	-18.98	17.94	0.062	36.99	-19.04
793.00	10	QPSK	V	152	296	1 / 0	15.09	6.11	19.05	0.080	34.77	-15.72	21.20	0.132	36.99	-15.78
793.00	10	16-QAM	V	152	296	1 / 0	14.34	6.11	18.30	0.068	34.77	-16.47	20.45	0.111	36.99	-16.53
793.00	10	64-QAM	V	152	296	1 / 0	13.44	6.11	17.40	0.055	34.77	-17.37	19.55	0.090	36.99	-17.43
793.00	10	256-QAM	V	152	296	1 / 0	11.54	6.11	15.50	0.036	34.77	-19.27	17.65	0.058	36.99	-19.33
793.00	10	QPSK	H	231	297	1 / 0	14.49	6.11	18.45	0.070	34.77	-16.32	20.60	0.115	36.99	-16.38

Table 7-56. ERP Data (Band 14)

FCC ID: A3LSMF707U	 MEASUREMENT REPORT (CERTIFICATION) 	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset
Page 52 of 66		

7.7 Radiated Spurious Emissions Measurements

§2.1053 §90.691(a) §90.543(e)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF707U	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 53 of 66	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

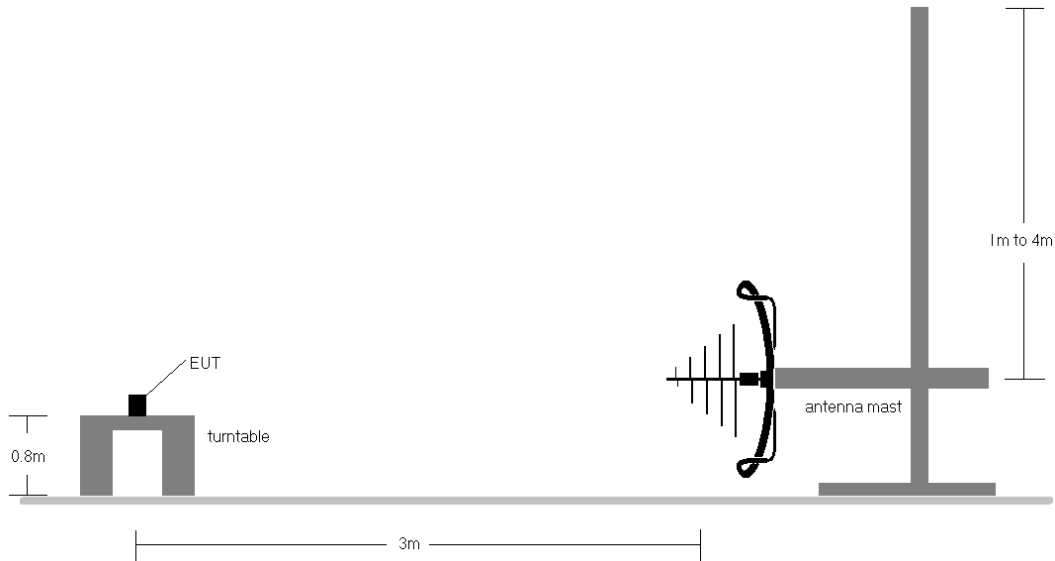


Figure 7-5. Test Instrument & Measurement Setup < 1GHz

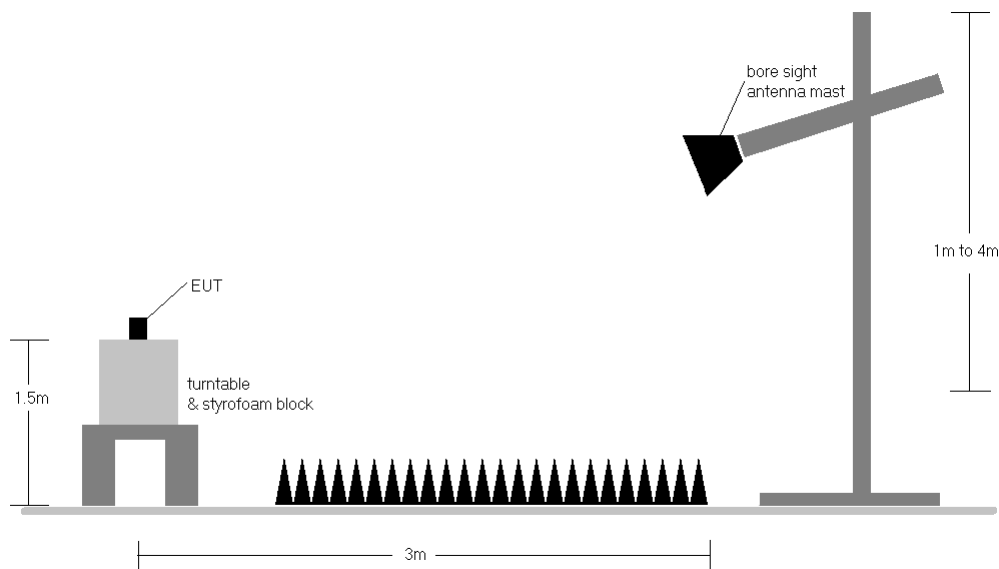


Figure 7-6. Test Instrument & Measurement Setup >1 GHz

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 54 of 66


Test Notes

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
6. Per 90.543(f), emissions in the 1559 – 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals. These emission measurements are shown in this section below.
7. Per KDB 971168, Field Strength Level (dBμV/m) is converted to EIRP Spurious Emission Level (dBm) using the formula in Section 5.8.4 (d):

$EIRP\ (dBm) = E\ (dB\mu V/m) + 20\ log\ D - 104.8$; where D is the measurement distance in meters

FCC ID: A3LSMF707U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 55 of 66

CDMA BC10

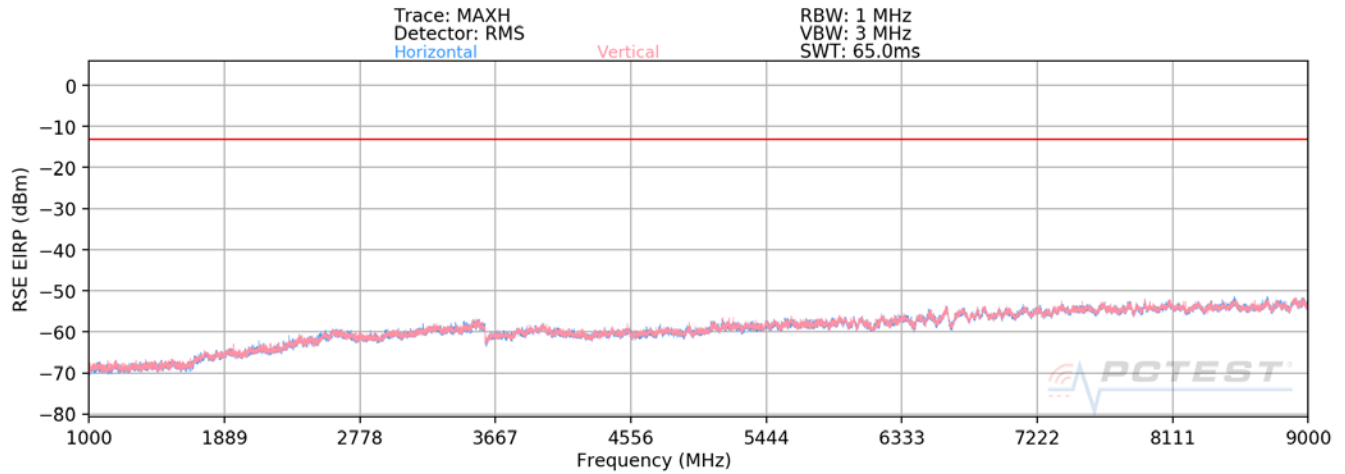

Plot 7-57. Radiated Spurious Plot (CDMA BC10)

Frequency (MHz):	817.9
Modulation:	EVDO BC10

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1635.8	V	358	13	-78.43	-6.49	22.08	-73.18	-13.00	-60.18
2453.7	V	-	-	-78.40	-1.84	26.76	-68.50	-13.00	-55.50
3271.6	V	-	-	-79.55	1.42	28.87	-66.38	-13.00	-53.38

Table 7-4. CDMA BC10 Radiated Spurious Data (Ch. 476)


Frequency (MHz):	823.1
Modulation:	EVDO BC10

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1646.2	V	-	-	-78.15	-6.36	22.49	-72.77	-13.00	-59.77
2469.3	V	-	-	-78.22	-2.31	26.47	-68.78	-13.00	-55.78
3292.4	V	-	-	-78.77	1.34	29.57	-65.69	-13.00	-52.69

Table 7-5. CDMA BC10 Radiated Spurious Data (Ch. 684)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 56 of 66

LTE Band 26

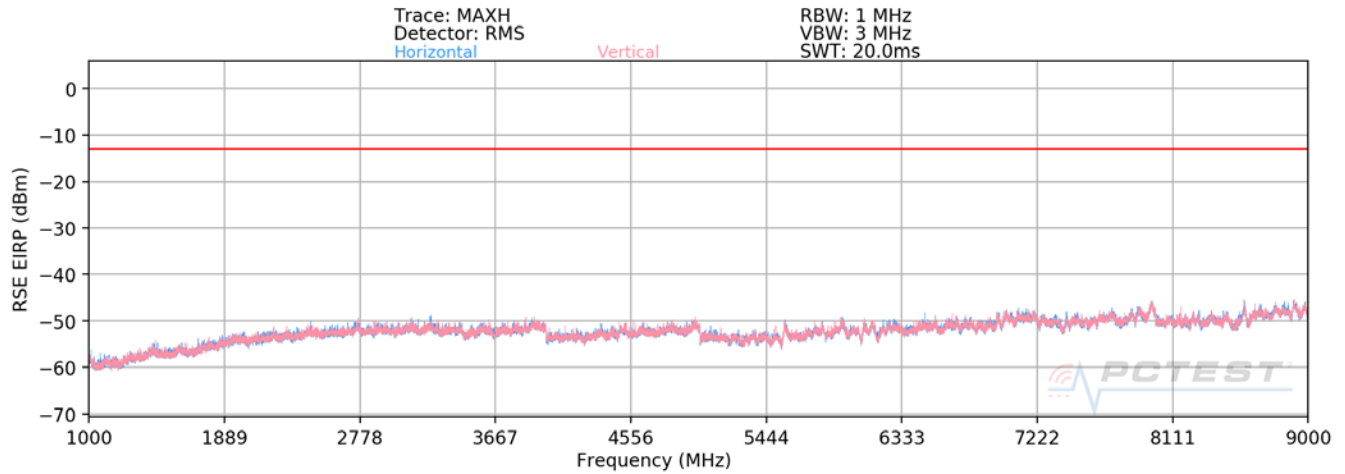

Plot 7-58. Radiated Spurious Plot (Band 26)


Bandwidth (MHz):	10
Frequency (MHz):	819.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1638.0	H	264	216	-76.02	0.78	31.76	-63.49	-13.00	-50.49
2457.0	H	111	1	-76.98	5.21	35.23	-60.03	-13.00	-47.03
3276.0	H	-	-	-80.01	6.31	33.30	-61.96	-13.00	-48.96
4095.0	H	-	-	-80.38	6.74	33.36	-61.89	-13.00	-48.89

Table 7-6. Radiated Spurious Data (LTE Band 26 – Mid Channel)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 57 of 66

LTE Band 14

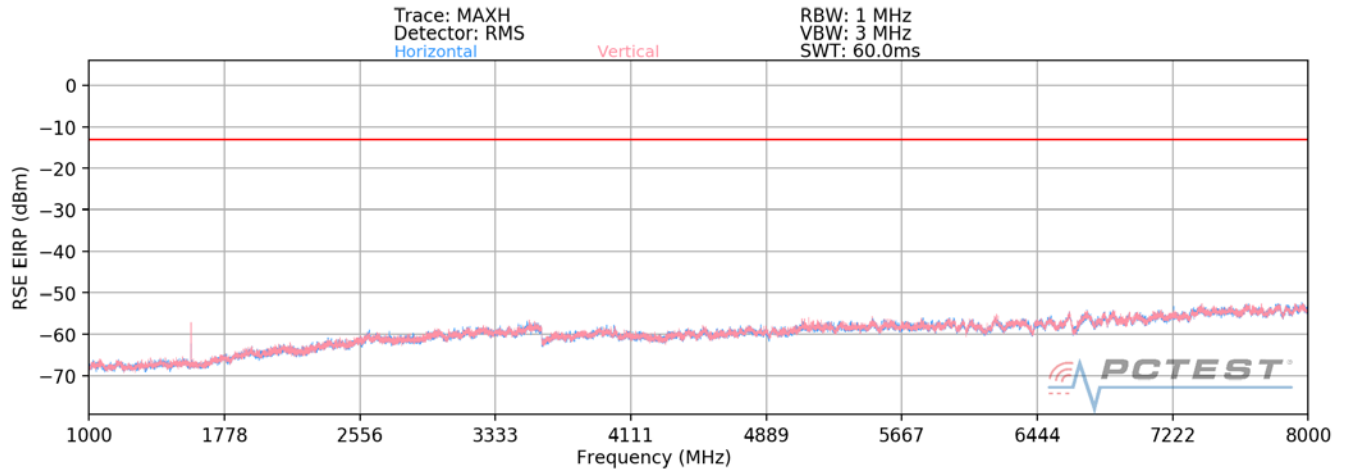

Plot 7-59. Radiated Spurious Plot (Band 14)

Bandwidth (MHz):	10
Frequency (MHz):	793.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.0	V	157	321	-65.87	-6.38	34.75	-60.51	-40.00	-20.51
2379.0	V	-	-	-77.67	-2.30	27.03	-68.22	-13.00	-55.22
3172.0	V	-	-	-78.16	0.84	29.68	-65.58	-13.00	-52.58

Table 7-7. Radiated Spurious Data (LTE Band 14)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 58 of 66

7.8 Frequency Stability / Temperature Variation

\$2.1055 \$90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMF707U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 59 of 66	

Frequency Stability / Temperature Variation

§2.1055, §90.213

Operating Frequency (Hz):	817,900,000
Ref. Voltage (VDC):	4.21
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	817,899,739	-261	-0.0000319
		- 20	817,900,175	175	0.0000214
		- 10	817,900,063	63	0.0000077
		0	817,900,275	275	0.0000336
		+ 10	817,899,806	-194	-0.0000237
		+ 20 (Ref)	817,899,929	-71	-0.0000087
		+ 30	817,900,135	135	0.0000165
		+ 40	817,900,059	59	0.0000072
		+ 50	817,900,085	85	0.0000104
Battery Endpoint	3.85	+ 20	817,899,856	-144	-0.0000176

Table 7-8. CDMA BC10 Frequency Stability Data

FCC ID: A3LSMF707U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset	Page 60 of 66	

Frequency Stability / Temperature Variation

§2.1055, §90.213

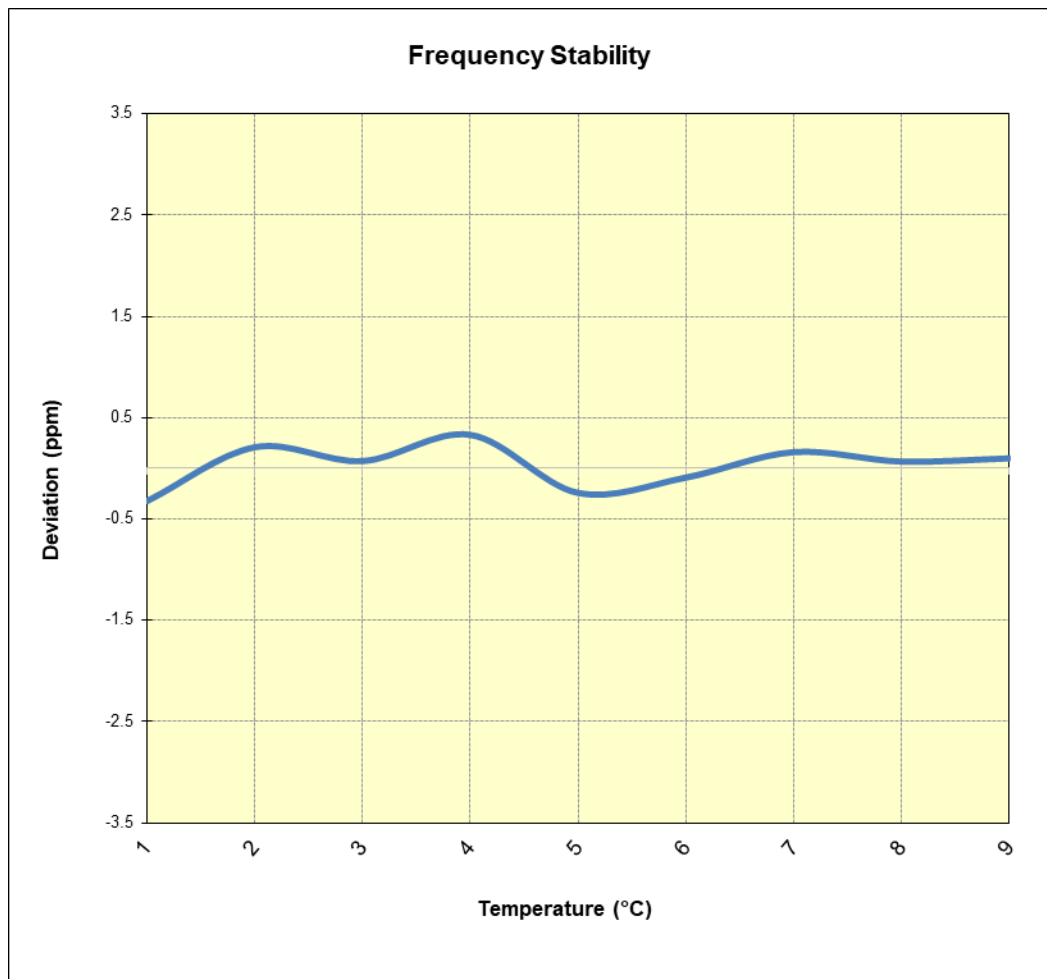


Figure 7-7. CDMA BC10 Frequency Stability Chart

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 61 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

Operating Frequency (Hz):	819,000,000
Ref. Voltage (VDC):	4.21
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	818,999,875	-125	-0.0000153
		- 20	818,999,825	-175	-0.0000214
		- 10	819,000,069	69	0.0000084
		0	819,000,015	15	0.0000018
		+ 10	819,000,076	76	0.0000093
		+ 20 (Ref)	818,999,888	-112	-0.0000137
		+ 30	819,000,142	142	0.0000173
		+ 40	819,000,063	63	0.0000077
		+ 50	818,999,550	-450	-0.0000549
Battery Endpoint	3.85	+ 20	818,999,824	-176	-0.0000215

Table 7-9. LTE Band 26 Frequency Stability Data

FCC ID: A3LSMF707U	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 62 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

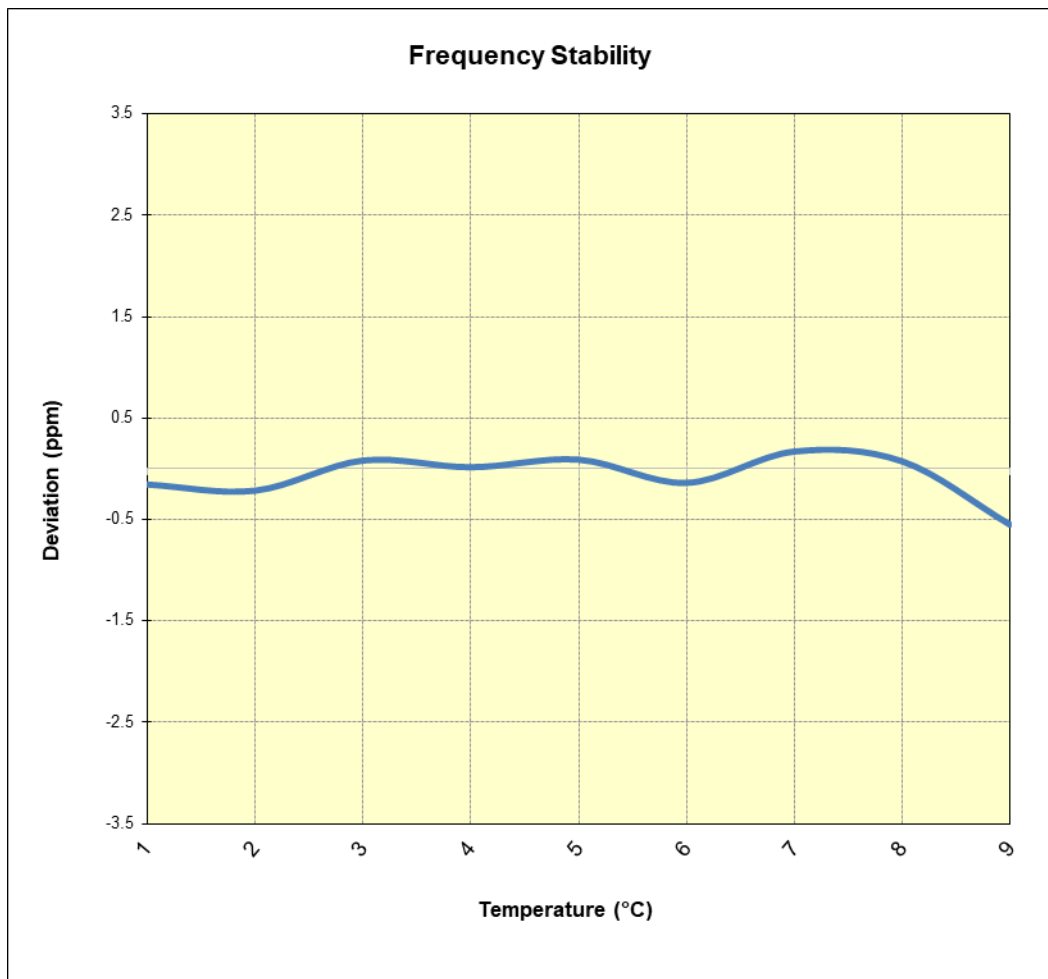


Table 7-10. LTE Band 26 Frequency Stability Chart

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 63 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

Operating Frequency (Hz):	793,000,000
Ref. Voltage (VDC):	4.21

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	- 30	792,999,949	-51	-0.0000064
		- 20	793,000,194	194	0.0000245
		- 10	793,000,009	9	0.0000011
		0	793,000,139	139	0.0000175
		+ 10	792,999,750	-250	-0.0000315
		+ 20 (Ref)	792,999,766	-234	-0.0000295
		+ 30	792,999,980	-20	-0.0000025
		+ 40	792,999,970	-30	-0.0000038
		+ 50	793,000,364	364	0.0000459
Battery Endpoint	3.85	+ 20	792,999,850	-150	-0.0000189

Table 7-11. LTE Band 14 Frequency Stability Data

FCC ID: A3LSMF707U	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 64 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

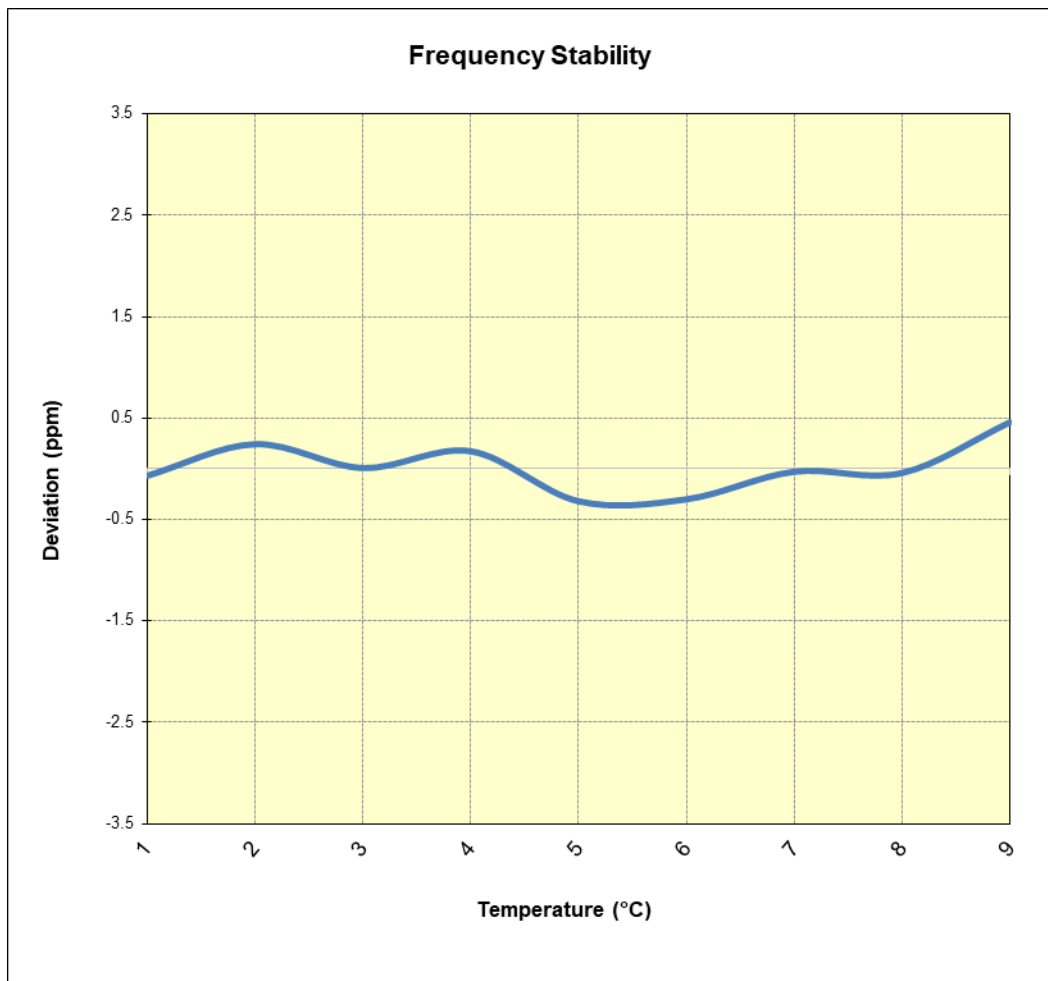


Table 7-12. LTE Band 14 Frequency Stability Chart

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 65 of 66

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF707U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: A3LSMF707U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005040080-04.A3L	Test Dates: 05/04 - 07/06/2020	EUT Type: Portable Handset		Page 66 of 66