



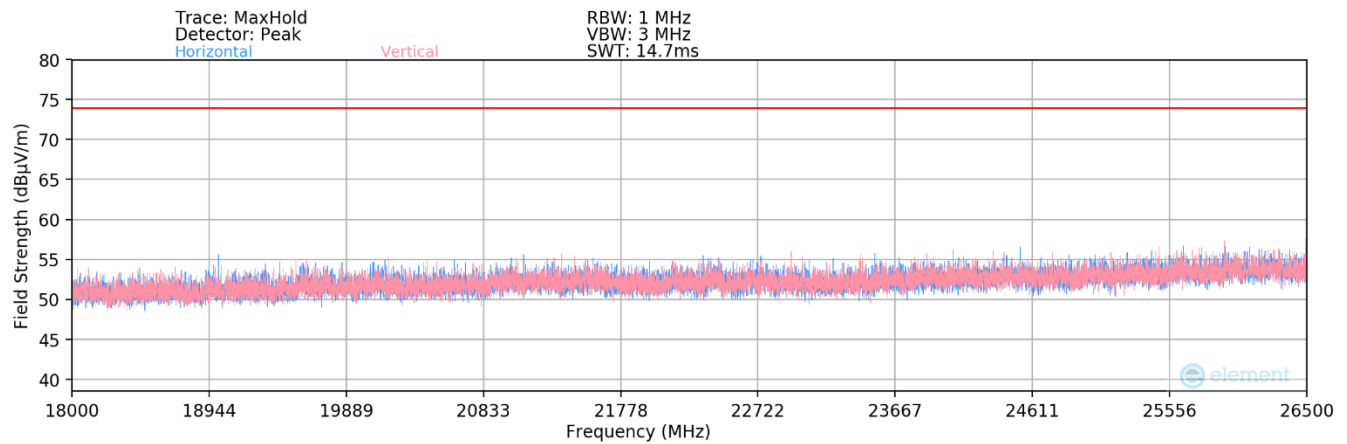

Plot 7-325. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax – 26 Tones) – Half Open

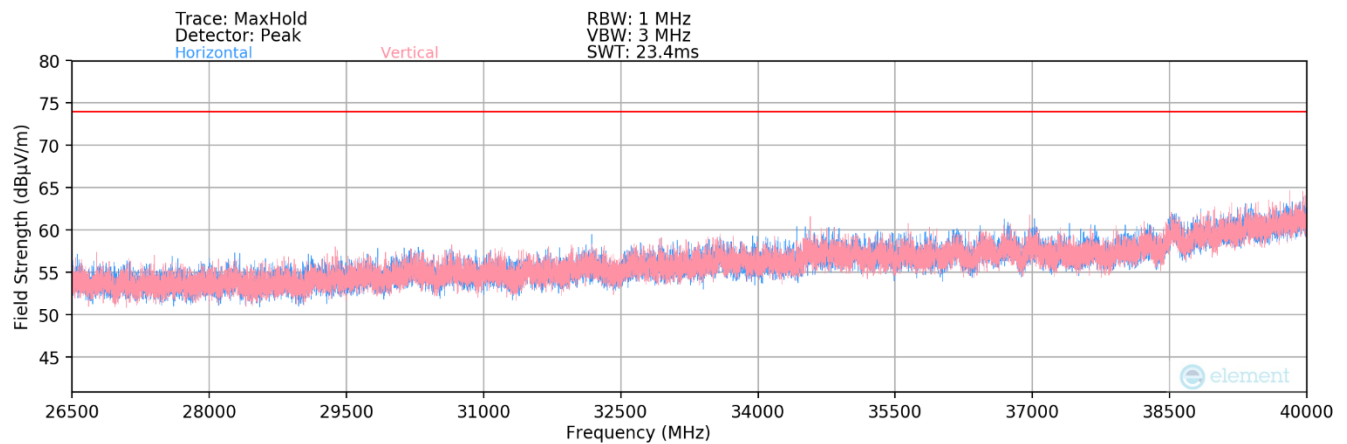

Plot 7-326. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax – 26 Tones) – Half Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 238 of 316

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 Radiated Spurious Emission Measurements (26 Tones)

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	8
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	279	39	-65.78	11.85	0.00	53.07	68.20	-15.13
* 15540.00	Average	V	-	-	-80.41	16.63	0.00	43.22	53.98	-10.76
* 15540.00	Peak	V	-	-	-68.41	16.63	0.00	55.22	73.98	-18.76
* 20720.00	Average	V	-	-	-67.92	3.15	-9.54	32.69	53.98	-21.29
* 20720.00	Peak	V	-	-	-57.61	3.15	-9.54	42.99	73.98	-30.99
25900.00	Peak	V	-	-	-57.84	4.77	-9.54	44.39	68.20	-23.81

Table 7-99. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	0
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5200MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	296	366	-67.31	11.49	0.00	51.18	68.20	-17.02
* 15600.00	Average	V	-	-	-80.22	16.85	0.00	43.63	53.98	-10.35
* 15600.00	Peak	V	-	-	-68.53	16.85	0.00	55.32	73.98	-18.66
* 20800.00	Average	V	-	-	-66.98	3.48	-9.54	33.96	53.98	-20.02
* 20800.00	Peak	V	-	-	-59.65	3.48	-9.54	41.28	73.98	-32.69
26000.00	Peak	V	-	-	-57.27	5.15	-9.54	45.34	68.20	-22.86

Table 7-100. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 239 of 316

V 9.0 02/01/2019

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	308	241	-68.24	12.01	0.00	50.77	68.20	-17.43
* 15720.00	Average	V	-	-	-80.30	17.21	0.00	43.91	53.98	-10.07
* 15720.00	Peak	V	-	-	-68.58	17.21	0.00	55.63	73.98	-18.35
* 20960.00	Average	V	-	-	-67.93	3.48	-9.54	33.00	53.98	-20.97
* 20960.00	Peak	V	-	-	-57.75	3.48	-9.54	43.19	73.98	-30.79
26200.00	Peak	V	-	-	-56.91	4.78	-9.54	45.32	68.20	-22.88

Table 7-101. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	346	332	-67.60	12.54	0.00	51.94	68.20	-16.26
* 15780.00	Average	V	-	-	-80.47	17.03	0.00	43.56	53.98	-10.42
* 15780.00	Peak	V	-	-	-68.35	17.03	0.00	55.68	73.98	-18.30
* 21040.00	Average	V	-	-	-66.84	3.53	-9.54	34.14	53.98	-19.83
* 21040.00	Peak	V	-	-	-57.25	3.53	-9.54	43.74	73.98	-30.24
26300.00	Peak	V	-	-	-57.38	4.64	-9.54	44.72	68.20	-23.48

Table 7-102. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 240 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	292	136	-66.12	12.39	0.00	53.27	68.20	-14.93
* 15840.00	Average	V	-	-	-80.55	16.71	0.00	43.16	53.98	-10.82
* 15840.00	Peak	V	-	-	-69.10	16.71	0.00	54.61	73.98	-19.37
* 21120.00	Average	V	-	-	-67.54	3.68	-9.54	33.60	53.98	-20.38
* 21120.00	Peak	V	-	-	-57.23	3.68	-9.54	43.91	73.98	-30.07
26400.00	Peak	V	-	-	-67.21	4.78	-9.54	35.03	68.20	-33.17

Table 7-103. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	284	220	-77.74	12.36	0.00	41.62	53.98	-12.36
* 10640.00	Peak	V	284	220	-63.53	12.36	0.00	55.83	73.98	-18.15
* 15960.00	Average	V	-	-	-80.80	18.25	0.00	44.45	53.98	-9.53
* 15960.00	Peak	V	-	-	-68.70	18.25	0.00	56.55	73.98	-17.43
* 21280.00	Average	V	-	-	-67.30	3.72	-9.54	33.88	53.98	-20.10
* 21280.00	Peak	V	-	-	-57.48	3.72	-9.54	43.70	73.98	-30.28
26600.00	Peak	V	-	-	-57.03	4.72	-9.54	45.15	68.20	-23.05

Table 7-104. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 241 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	283	66	-78.24	12.61	0.00	41.37	53.98	-12.61
* 11000.00	Peak	V	283	66	-65.30	12.61	0.00	54.31	73.98	-19.67
16500.00	Peak	V	-	-	-68.78	18.00	0.00	56.22	68.20	-11.98
22000.00	Peak	V	-	-	-57.80	3.83	-9.54	43.48	68.20	-24.72
27500.00	Peak	V	-	-	-56.41	4.96	-9.54	46.01	68.20	-22.19

Table 7-105. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	286	224	-77.70	12.49	0.00	41.79	53.98	-12.19
* 11200.00	Peak	V	286	224	-64.53	12.49	0.00	54.96	73.98	-19.02
16800.00	Peak	V	-	-	-68.86	18.32	0.00	56.46	68.20	-11.74
* 22400.00	Average	V	-	-	-66.88	3.79	-9.54	34.37	53.98	-19.61
* 22400.00	Peak	V	-	-	-57.02	3.79	-9.54	44.23	73.98	-29.75
28000.00	Peak	V	-	-	-57.42	4.94	-9.54	44.98	68.20	-23.22

Table 7-106. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 242 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	V	321	96	-78.78	12.91	0.00	41.13	53.98	-12.84
*	11440.00	Peak	V	321	96	-65.45	12.91	0.00	54.46	73.98	-19.51
	17160.00	Peak	V	-	-	-68.43	17.87	0.00	56.44	68.20	-11.76
*	22880.00	Average	V	-	-	-67.22	3.79	-9.54	34.02	53.98	-19.96
*	22880.00	Peak	V	-	-	-57.32	3.79	-9.54	43.93	73.98	-30.05
	28600.00	Peak	V	-	-	-56.74	5.27	-9.54	45.99	68.20	-22.21

Table 7-107. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	V	317	271	-79.82	13.32	0.00	40.50	53.98	-13.47
*	11490.00	Peak	V	317	271	-67.62	13.32	0.00	52.70	73.98	-21.27
	17235.00	Peak	V	-	-	-68.73	17.85	0.00	56.12	68.20	-12.08
*	22980.00	Average	V	-	-	-68.12	3.79	-9.54	33.13	53.98	-20.85
*	22980.00	Peak	V	-	-	-57.41	3.79	-9.54	43.84	73.98	-30.14
	28725.00	Peak	V	-	-	-58.51	5.41	-9.54	44.35	68.20	-23.85

Table 7-108. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 243 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	299	175	-78.70	12.93	0.00	41.23	53.98	-12.75
* 11570.00	Peak	V	299	175	-65.31	12.93	0.00	54.62	73.98	-19.36
17355.00	Peak	V	-	-	-68.70	18.36	0.00	56.66	68.20	-11.54
23140.00	Peak	V	-	-	-56.78	3.75	-9.54	44.42	68.20	-23.78
28925.00	Peak	V	-	-	-57.27	5.46	-9.54	45.65	68.20	-22.55

Table 7-109. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	279	370	-79.90	13.82	0.00	40.92	53.98	-13.06
* 11650.00	Peak	V	279	370	-67.63	13.82	0.00	53.19	73.98	-20.79
17475.00	Peak	V	-	-	-68.47	17.74	0.00	56.27	68.20	-11.93
23300.00	Peak	V	-	-	-57.13	3.76	-9.54	44.09	68.20	-24.11
29125.00	Peak	V	-	-	-56.94	5.54	-9.54	46.06	68.20	-22.14

Table 7-110. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 244 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11690.00	Average	V	-	-	-80.87	13.95	0.00	40.08	53.98	-13.90
* 11690.00	Peak	V	-	-	-68.80	13.95	0.00	52.15	73.98	-21.83
17535.00	Peak	V	-	-	-67.83	18.12	0.00	57.29	68.20	-10.91
23380.00	Peak	V	-	-	-55.96	3.85	-9.54	54.88	68.20	-13.32
29225.00	Peak	V	-	-	-56.27	5.60	-9.54	56.33	68.20	-11.87
35070.00	Peak	V	-	-	-54.85	8.11	-9.54	60.26	68.20	-7.94

Table 7-111. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11730.00	Average	V	-	-	-80.67	14.16	0.00	40.49	53.98	-13.49
* 11730.00	Peak	V	-	-	-67.92	14.16	0.00	53.24	73.98	-20.74
17595.00	Peak	V	-	-	67.98	18.19	0.00	193.17	68.20	124.97
23460.00	Peak	V	-	-	-55.79	3.85	-9.54	55.07	68.20	-13.13
29325.00	Peak	V	-	-	-55.50	5.85	-9.54	57.36	68.20	-10.84
35190.00	Peak	V	-	-	-55.10	8.16	-9.54	60.07	68.20	-8.13

Table 7-112. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 245 of 316


Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	V	-	-	-80.24	14.19	0.00	40.95	53.98	-13.03
* 11770.00	Peak	V	-	-	-68.48	14.19	0.00	52.71	73.98	-21.27
17655.00	Peak	V	-	-	-68.06	18.07	0.00	57.01	68.20	-11.19
23540.00	Peak	V	-	-	-56.18	3.84	-9.54	54.67	68.20	-13.53
29425.00	Peak	V	-	-	-55.50	5.87	-9.54	57.37	68.20	-10.83
35310.00	Peak	V	-	-	-54.13	8.04	-9.54	60.91	68.20	-7.29


Table 7-113. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 246 of 316


242 Tones

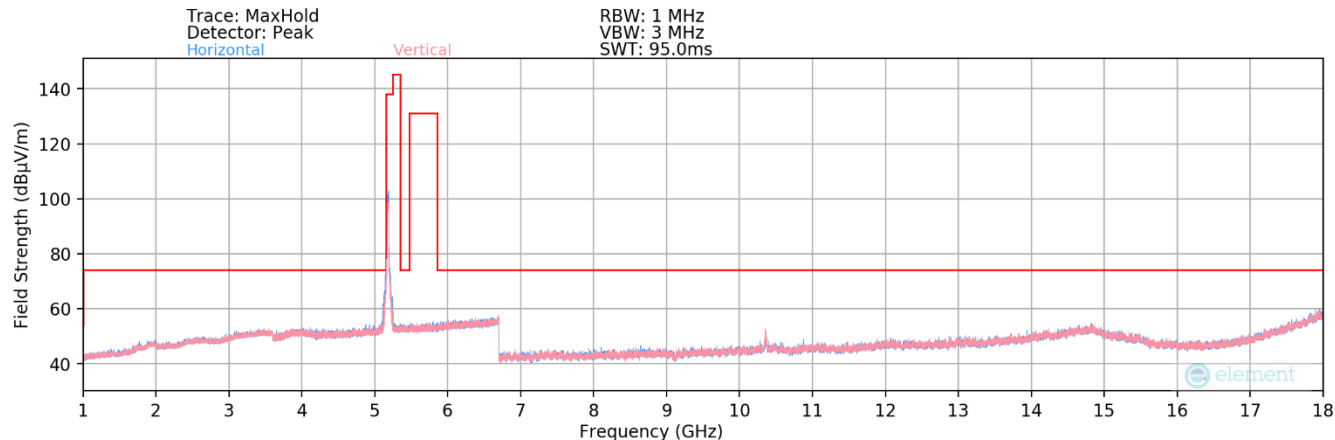

Plot 7-327. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U1 Ch. 40 – 242 Tones) – Closed

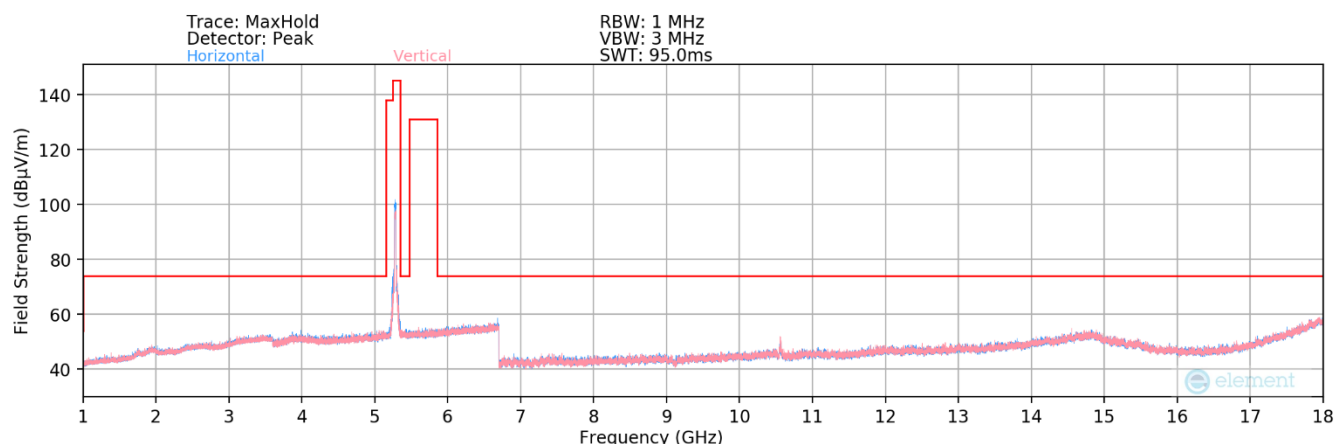

Plot 7-328. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2A Ch. 56 – 242 Tones) – Closed

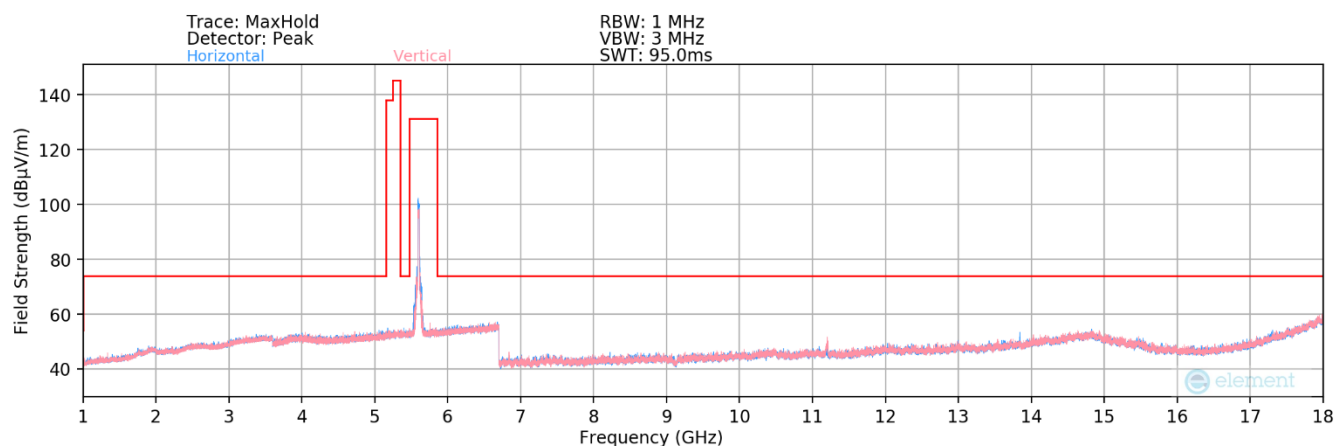


Plot 7-329. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2C Ch. 120 – 242 Tones) – Closed


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 247 of 316

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

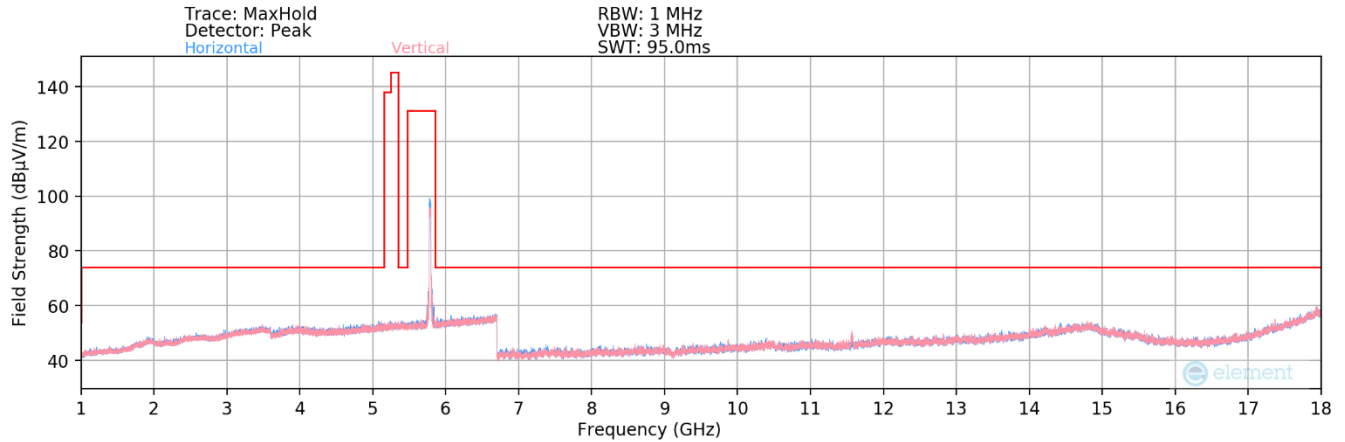


Plot 7-330. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U3 Ch. 157 – 242 Tones) – Closed

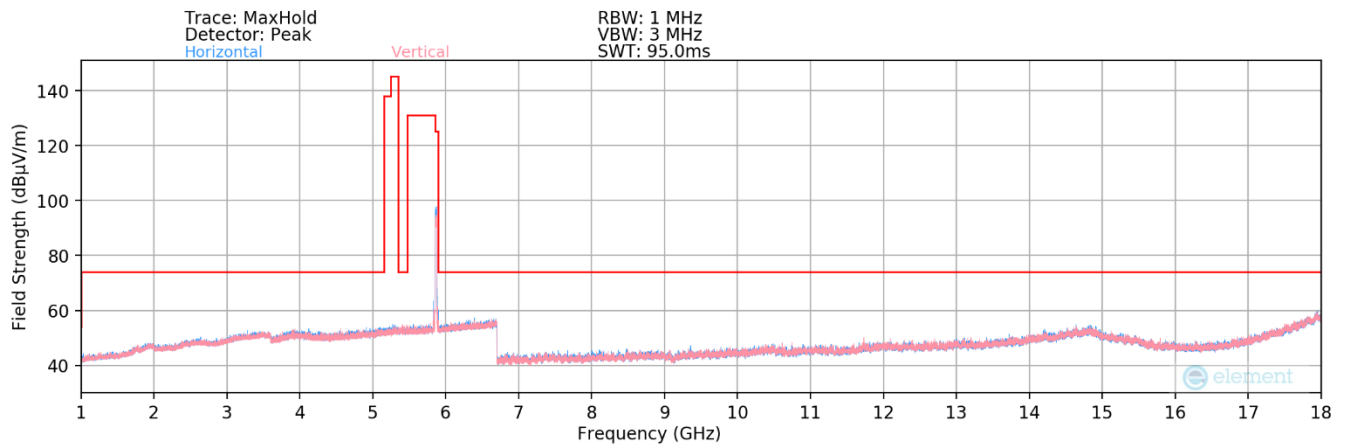


Plot 7-331. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U4 Ch. 173 – 242 Tones) – Closed

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 248 of 316


V 9.0 02/01/2019

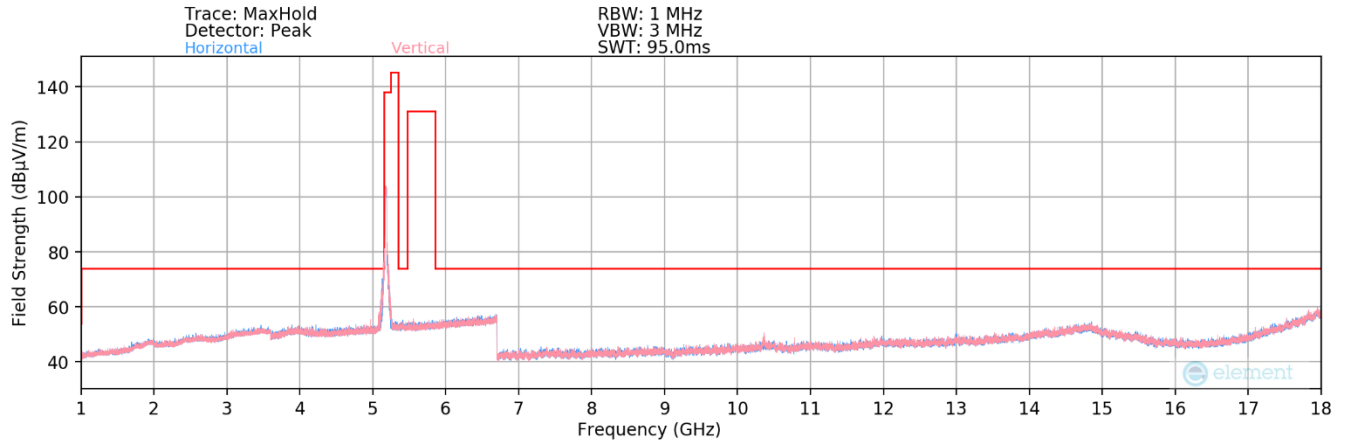

Plot 7-332. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U1 Ch. 40 – 242 Tones) – Half Open

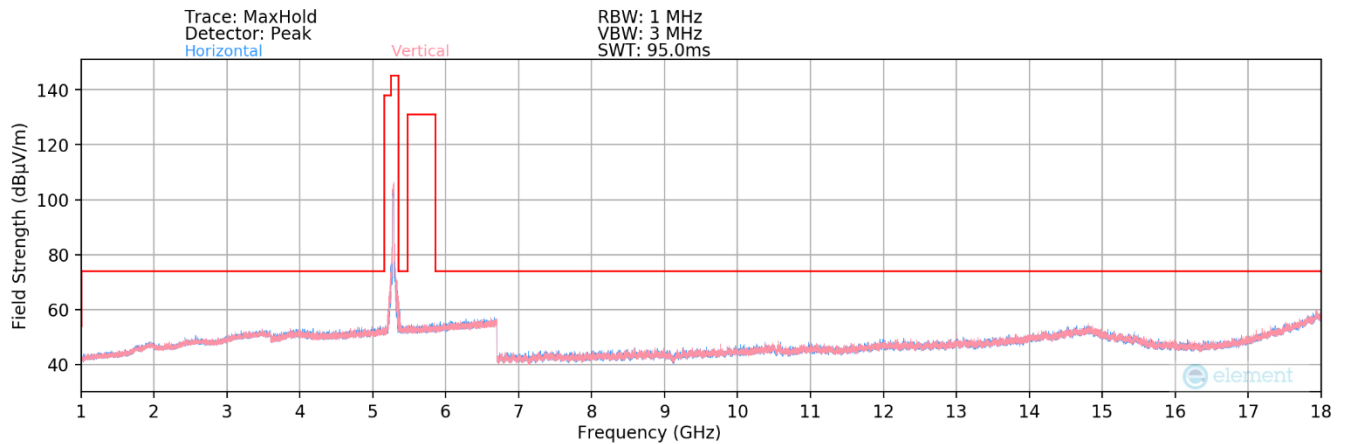

Plot 7-333. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2A Ch. 56 – 242 Tones) – Half Open

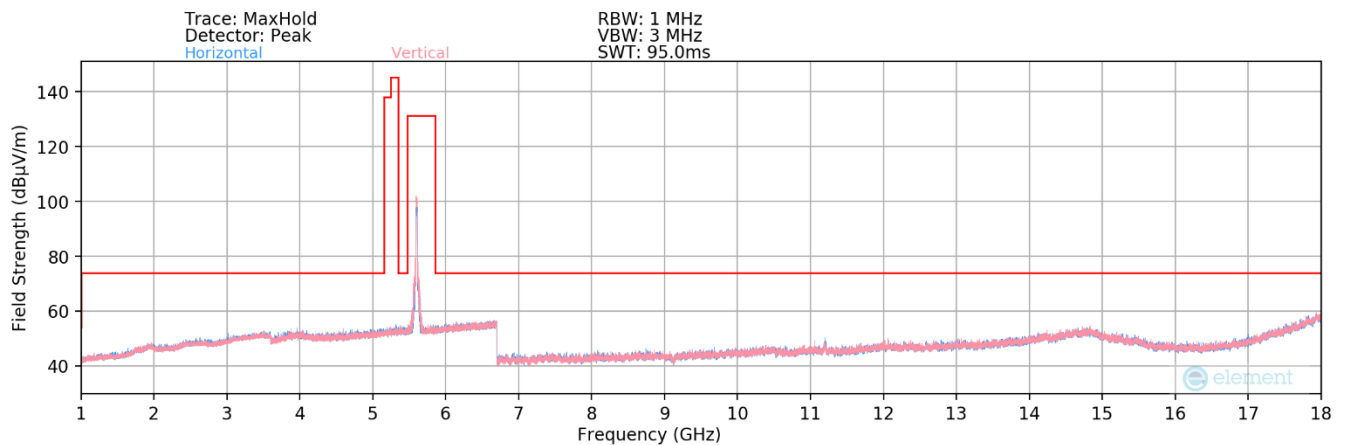


Plot 7-334. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2C Ch. 120 – 242 Tones) – Half Open


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 249 of 316

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

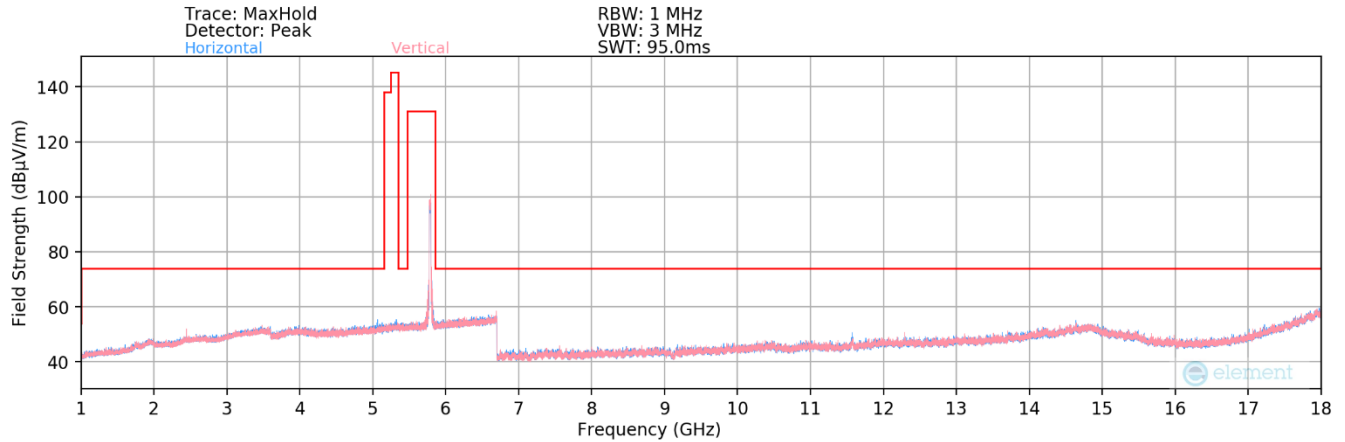

Plot 7-335. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U3 Ch. 157 – 242 Tones) – Half Open

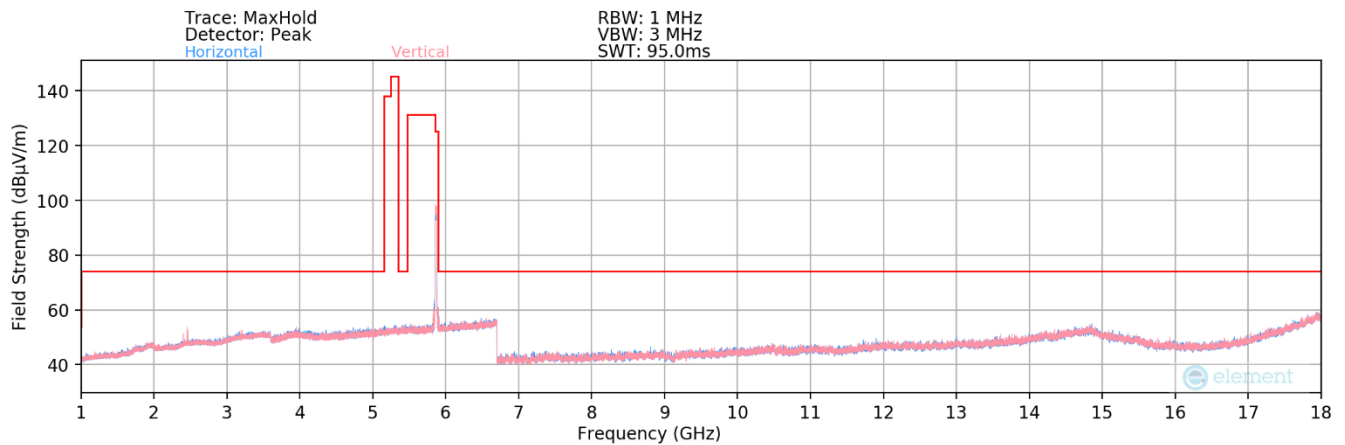


Plot 7-336. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U4 Ch. 173 – 242 Tones) – Half Open


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 250 of 316

V 9.0 02/01/2019

SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

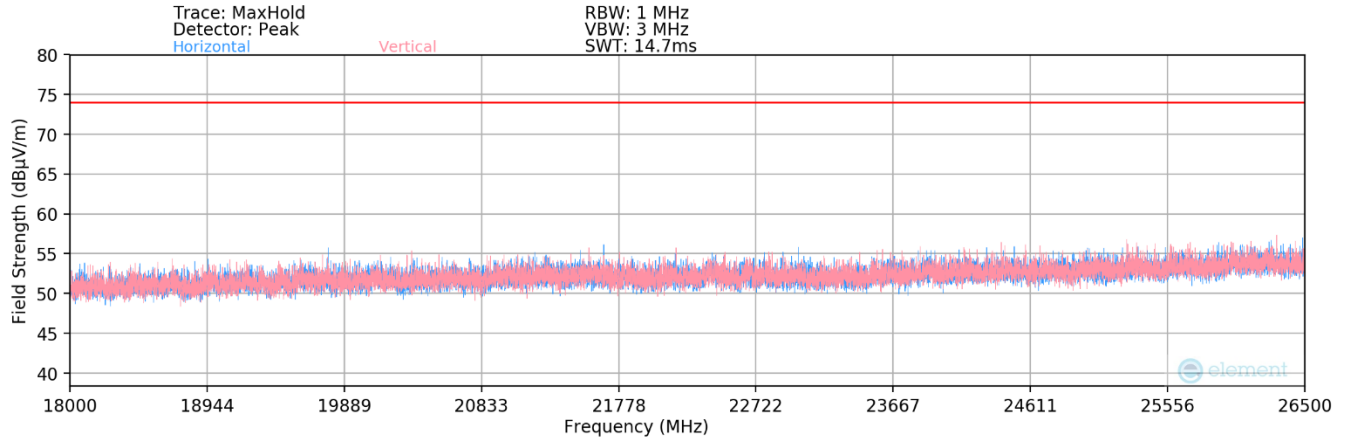


Plot 7-337. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax - 242 Tones) - Closed

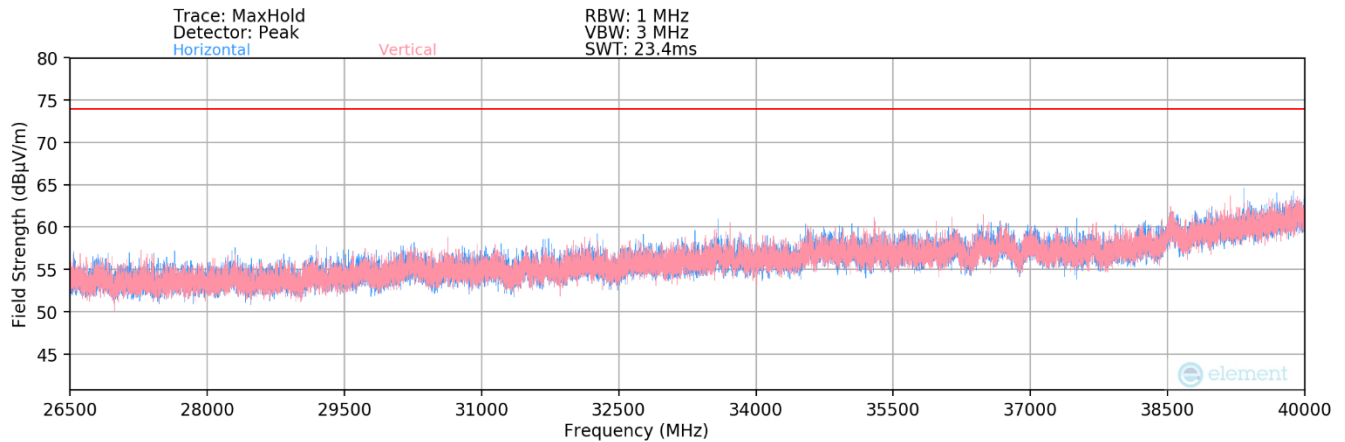


Plot 7-338. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax - 242 Tones) - Closed

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 251 of 316

V 9.0 02/01/2019

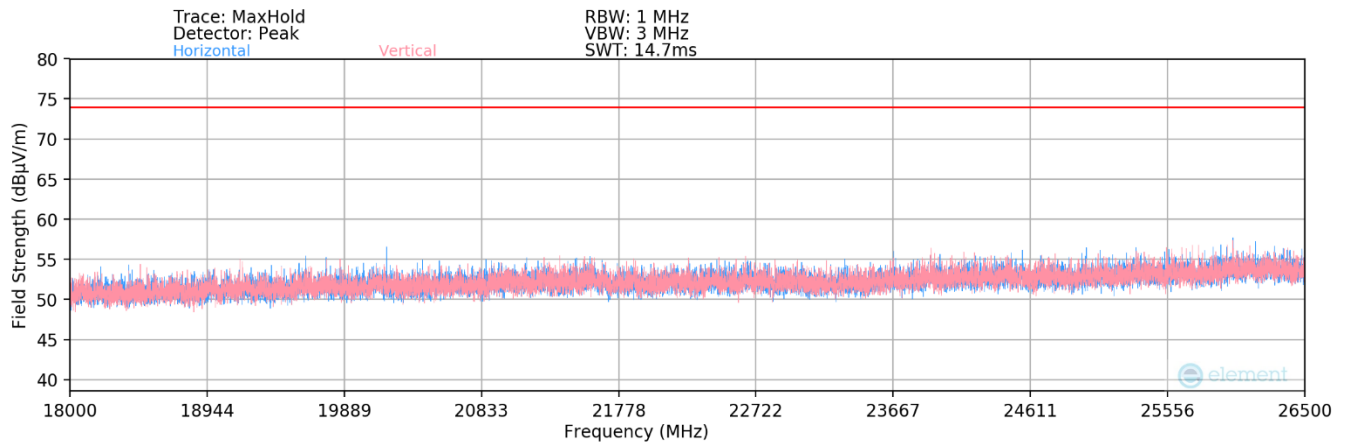

Plot 7-339. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax – 242 Tones) – Half Open

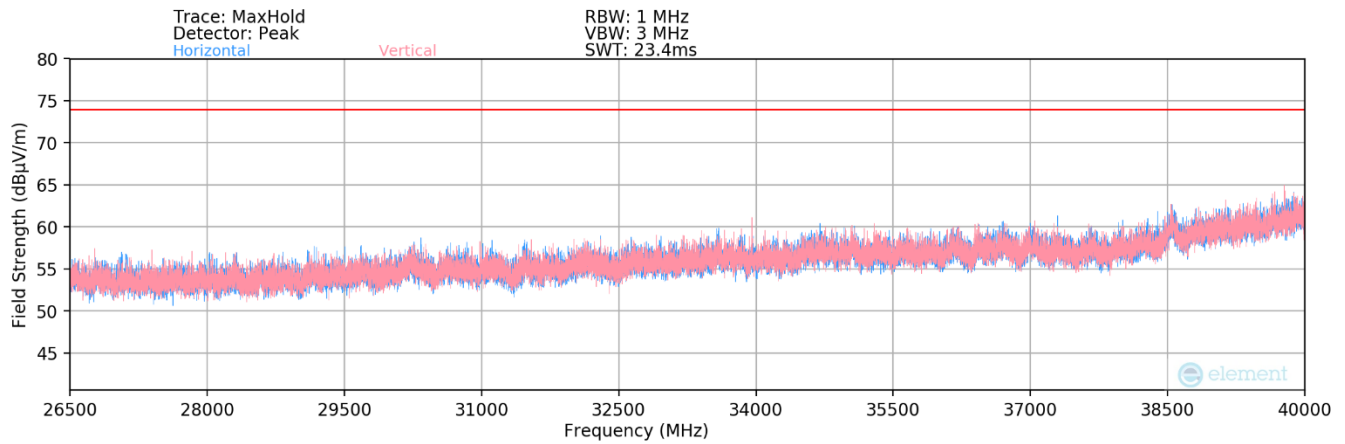

Plot 7-340. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax – 242 Tones) – Half Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 252 of 316

V 9.0 02/01/2019

SISO Antenna-1 Radiated Spurious Emission Measurements (242 Tones)

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	288	224	-67.12	11.85	0.00	51.73	68.20	-16.47
* 15540.00	Average	V	-	-	-80.39	16.63	0.00	43.24	53.98	-10.74
* 15540.00	Peak	V	-	-	-68.70	16.63	0.00	54.93	73.98	-19.05
* 20720.00	Average	V	-	-	-67.15	3.15	-9.54	33.46	53.98	-20.52
* 20720.00	Peak	V	-	-	-59.43	3.15	-9.54	41.18	73.98	-32.80
25900.00	Peak	V	-	-	-57.01	4.77	-9.54	45.22	68.20	-22.98

Table 7-114. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5200MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	288	242	-65.91	11.49	0.00	52.58	68.20	-15.62
* 15600.00	Average	V	-	-	-80.50	16.85	0.00	43.35	53.98	-10.63
* 15600.00	Peak	V	-	-	-68.66	16.85	0.00	55.19	73.98	-18.79
* 20800.00	Average	V	-	-	-66.55	3.48	-9.54	34.38	53.98	-19.60
* 20800.00	Peak	V	-	-	-57.28	3.48	-9.54	43.66	73.98	-30.32
26000.00	Peak	V	-	-	-57.66	5.15	-9.54	44.94	68.20	-23.26

Table 7-115. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset		Page 253 of 316

V 9.0 02/01/2019

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	281	220	-66.11	12.01	0.00	52.90	68.20	-15.30
* 15720.00	Average	V	-	-	-80.39	17.21	0.00	43.82	53.98	-10.16
* 15720.00	Peak	V	-	-	-68.67	17.21	0.00	55.54	73.98	-18.44
* 20960.00	Average	V	-	-	-67.08	3.48	-9.54	33.85	53.98	-20.13
* 20960.00	Peak	V	-	-	-57.97	3.48	-9.54	42.97	73.98	-31.01
26200.00	Peak	V	-	-	-56.81	4.78	-9.54	45.43	68.20	-22.77

Table 7-116. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	318	59	-67.00	12.54	0.00	52.54	68.20	-15.66
* 15780.00	Average	V	-	-	-80.50	17.03	0.00	43.53	53.98	-10.45
* 15780.00	Peak	V	-	-	-68.81	17.03	0.00	55.22	73.98	-18.76
* 21040.00	Average	V	-	-	-67.23	3.53	-9.54	33.76	53.98	-20.22
* 21040.00	Peak	V	-	-	-58.14	3.53	-9.54	42.84	73.98	-31.14
26300.00	Peak	V	-	-	-57.61	4.64	-9.54	44.49	68.20	-23.71

Table 7-117. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 254 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	316	43	-64.97	12.39	0.00	54.42	68.20	-13.78
* 15840.00	Average	V	-	-	-80.53	16.71	0.00	43.18	53.98	-10.80
* 15840.00	Peak	V	-	-	-68.74	16.71	0.00	54.97	73.98	-19.01
* 21120.00	Average	V	-	-	-66.89	3.68	-9.54	34.25	53.98	-19.73
* 21120.00	Peak	V	-	-	-56.93	3.68	-9.54	44.21	73.98	-29.77
26400.00	Peak	V	-	-	-56.83	4.78	-9.54	45.41	68.20	-22.79

Table 7-118. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	339	48	-76.81	12.36	0.00	42.55	53.98	-11.43
* 10640.00	Peak	V	339	48	-64.77	12.36	0.00	54.59	73.98	-19.39
* 15960.00	Average	V	-	-	-79.87	18.25	0.00	45.38	53.98	-8.60
* 15960.00	Peak	V	-	-	-68.10	18.25	0.00	57.15	73.98	-16.83
* 21280.00	Average	V	-	-	-67.23	3.72	-9.54	33.94	53.98	-20.04
* 21280.00	Peak	V	-	-	-58.29	3.72	-9.54	42.89	73.98	-31.09
26600.00	Peak	V	-	-	-57.03	4.72	-9.54	45.14	68.20	-23.06

Table 7-119. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset		Page 255 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	305	350	-78.34	12.61	0.00	41.27	53.98	-12.71
* 11000.00	Peak	V	305	350	-66.06	12.61	0.00	53.55	73.98	-20.43
16500.00	Peak	V	-	-	-67.74	18.00	0.00	57.26	68.20	-10.94
22000.00	Peak	V	-	-	-57.36	3.83	-9.54	43.93	68.20	-24.27
27500.00	Peak	V	-	-	-55.62	4.96	-9.54	46.80	68.20	-21.40

Table 7-120. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	316	171	-77.18	12.49	0.00	42.31	53.98	-11.67
* 11200.00	Peak	V	316	171	-64.45	12.49	0.00	55.04	73.98	-18.94
16800.00	Peak	V	-	-	-68.90	18.32	0.00	56.42	68.20	-11.78
* 22400.00	Average	V	-	-	-66.77	3.79	-9.54	34.48	53.98	-19.50
* 22400.00	Peak	V	-	-	-56.80	3.79	-9.54	44.45	73.98	-29.53
28000.00	Peak	V	-	-	-56.77	4.94	-9.54	45.63	68.20	-22.57

Table 7-121. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 256 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	278	170	-77.67	12.91	0.00	42.24	53.98	-11.73
* 11440.00	Peak	V	278	170	-65.48	12.91	0.00	54.43	73.98	-19.54
17160.00	Peak	V	-	-	-68.06	17.87	0.00	56.81	68.20	-11.39
* 22880.00	Average	V	-	-	-66.78	3.79	-9.54	34.47	53.98	-19.51
* 22880.00	Peak	V	-	-	-57.38	3.79	-9.54	43.86	73.98	-30.12
28600.00	Peak	V	-	-	-56.99	5.27	-9.54	45.74	68.20	-22.46

Table 7-122. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	297	179	-77.77	13.32	0.00	42.55	53.98	-11.42
* 11490.00	Peak	V	297	179	-63.89	13.32	0.00	56.43	73.98	-17.54
17235.00	Peak	V	-	-	-67.98	17.85	0.00	56.87	68.20	-11.33
* 22980.00	Average	V	-	-	-68.01	3.79	-9.54	33.23	53.98	-20.74
* 22980.00	Peak	V	-	-	-57.59	3.79	-9.54	43.66	73.98	-30.32
28725.00	Peak	V	-	-	-57.38	5.41	-9.54	45.49	68.20	-22.71

Table 7-123. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset		Page 257 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	281	178	-77.37	12.93	0.00	42.56	53.98	-11.42
* 11570.00	Peak	V	281	178	-63.93	12.93	0.00	56.00	73.98	-17.98
17355.00	Peak	V	-	-	-68.75	18.36	0.00	56.61	68.20	-11.59
23140.00	Peak	V	-	-	-57.77	3.75	-9.54	43.44	68.20	-24.76
28925.00	Peak	V	-	-	-57.53	5.46	-9.54	45.38	68.20	-22.82

Table 7-124. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	287	181	-78.44	13.82	0.00	42.38	53.98	-11.60
* 11650.00	Peak	V	287	181	-65.62	13.82	0.00	55.20	73.98	-18.78
17475.00	Peak	V	-	-	-68.34	17.74	0.00	56.40	68.20	-11.80
23300.00	Peak	V	-	-	-59.10	3.76	-9.54	42.12	68.20	-26.08
29125.00	Peak	V	-	-	-57.71	5.54	-9.54	45.29	68.20	-22.91

Table 7-125. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 258 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11690.00	Average	V	304	182	-78.24	13.65	0.00	42.41	53.98	-11.57
* 11690.00	Peak	V	304	182	-65.38	13.65	0.00	55.27	73.98	-18.71
17535.00	Peak	V	-	-	-68.67	17.82	0.00	56.15	68.20	-12.05
23380.00	Peak	V	-	-	-56.10	3.85	-9.54	54.75	68.20	-13.45
29225.00	Peak	V	-	-	-55.58	5.60	-9.54	57.02	68.20	-11.18
35070.00	Peak	V	-	-	-55.14	8.11	-9.54	59.97	68.20	-8.23

Table 7-126. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11730.00	Average	V	333	194	-79.45	13.70	0.00	41.25	53.98	-12.73
* 11730.00	Peak	V	333	194	-66.89	13.70	0.00	53.81	73.98	-20.17
17595.00	Peak	V	-	-	-67.65	17.70	0.00	57.05	68.20	-11.15
23460.00	Peak	V	-	-	-56.79	3.85	-9.54	54.06	68.20	-14.14
29325.00	Peak	V	-	-	-55.40	5.85	-9.54	57.45	68.20	-10.75
35190.00	Peak	V	-	-	-56.63	8.16	-9.54	58.53	68.20	-9.67

Table 7-127. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 259 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	V	299	199	-79.20	13.81	0.00	41.61	53.98	-12.37
* 11770.00	Peak	V	299	199	-66.89	13.81	0.00	53.92	73.98	-20.06
17655.00	Peak	V	-	-	-68.43	17.52	0.00	56.09	68.20	-12.11
23540.00	Peak	V	-	-	-55.96	3.84	-9.54	54.89	68.20	-13.31
29425.00	Peak	V	-	-	-56.13	5.87	-9.54	56.74	68.20	-11.46
35310.00	Peak	V	-	-	-55.29	8.04	-9.54	59.74	68.20	-8.46

Table 7-128. Radiated Measurements SISO ANT1 (242 Tones)


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 260 of 316

7.6.2 MIMO Radiated Spurious Emission Measurements


26 Tones

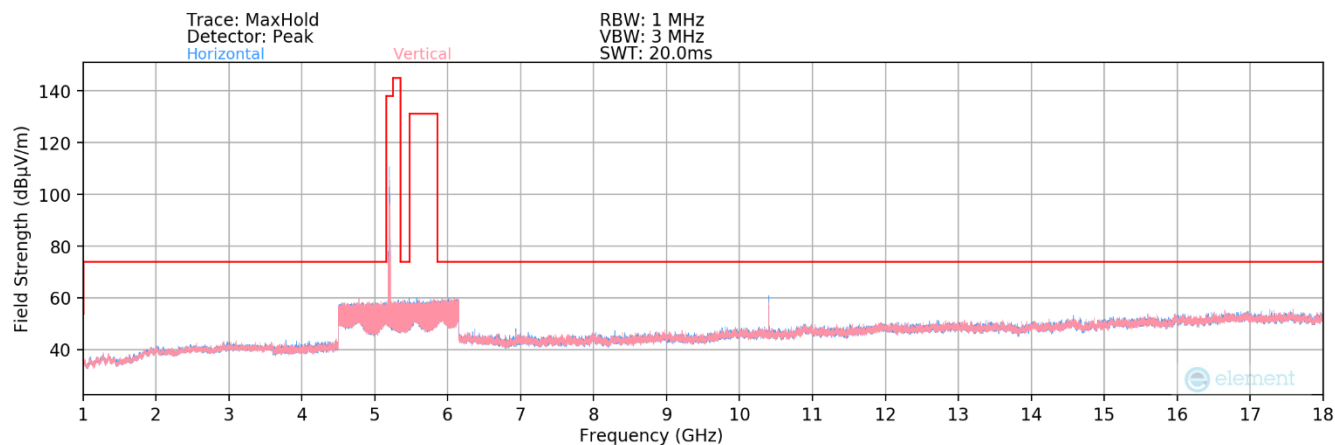

Plot 7-341. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U1 Ch. 40 – 26 Tones) – Open

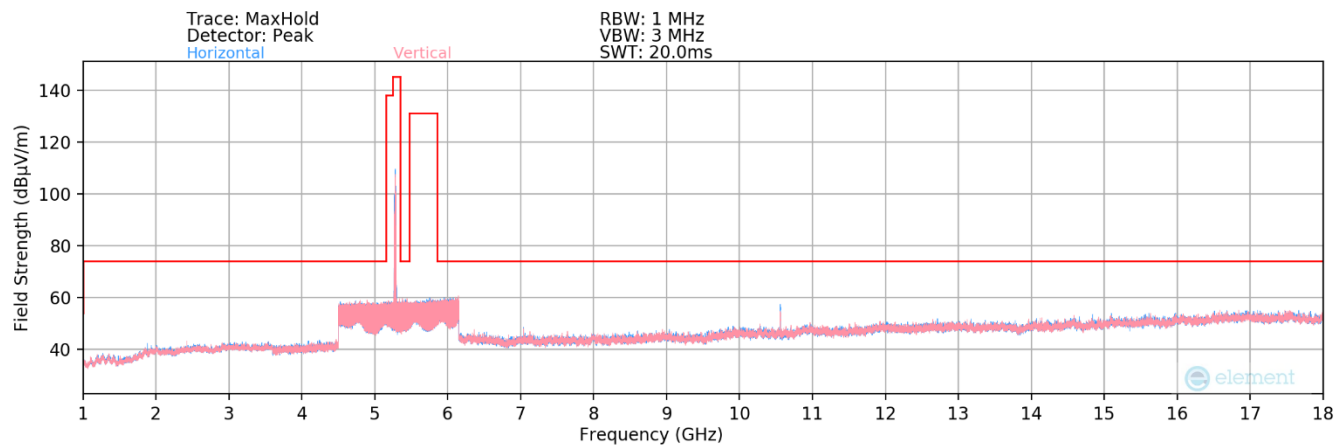


Plot 7-342. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2A Ch. 56 – 26 Tones) – Open

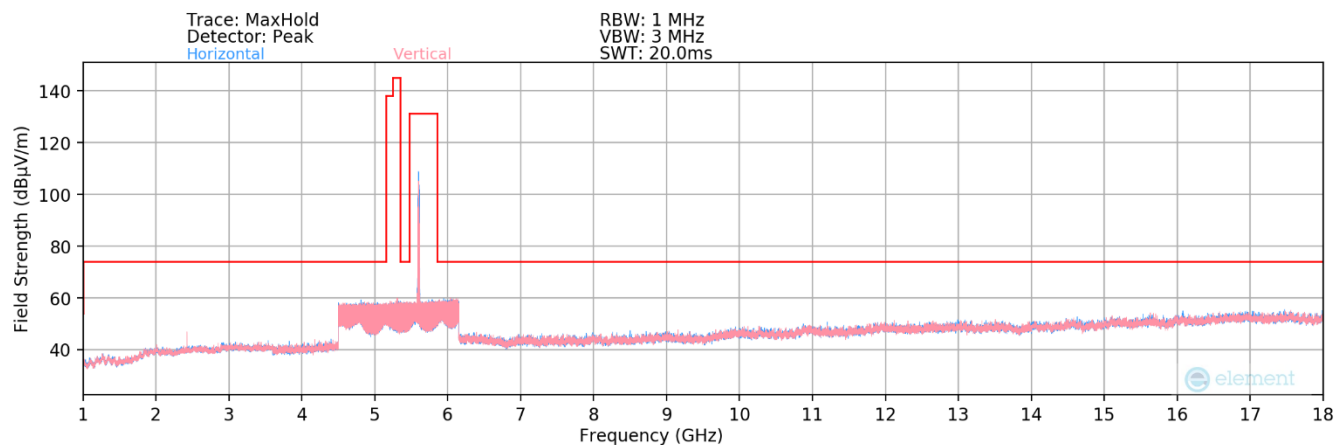


Plot 7-343. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2C Ch. 120 – 26 Tones) – Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 261 of 316

V 9.0 02/01/2019

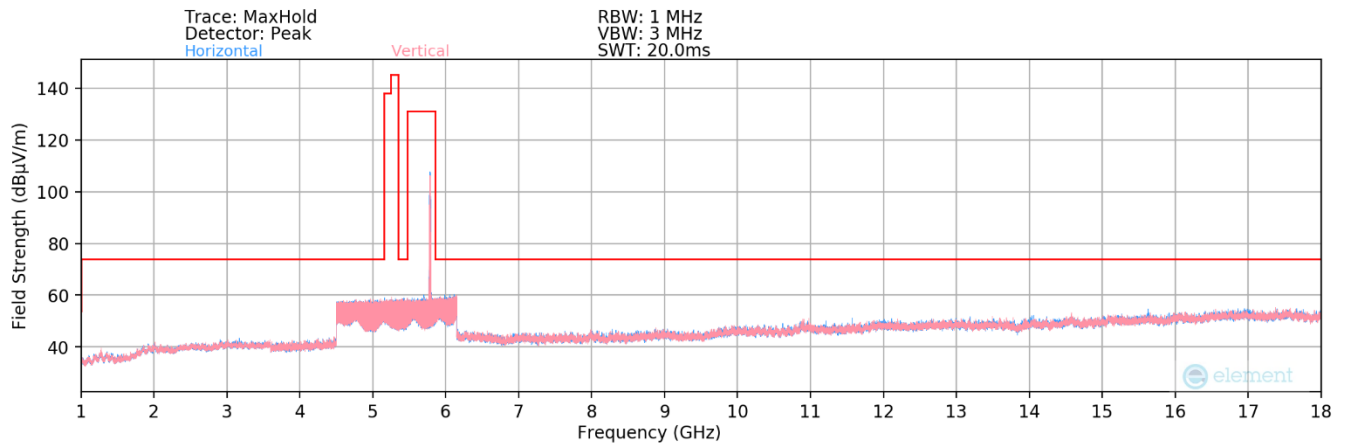


Plot 7-344. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U3 Ch. 157 – 26 Tones) – Open

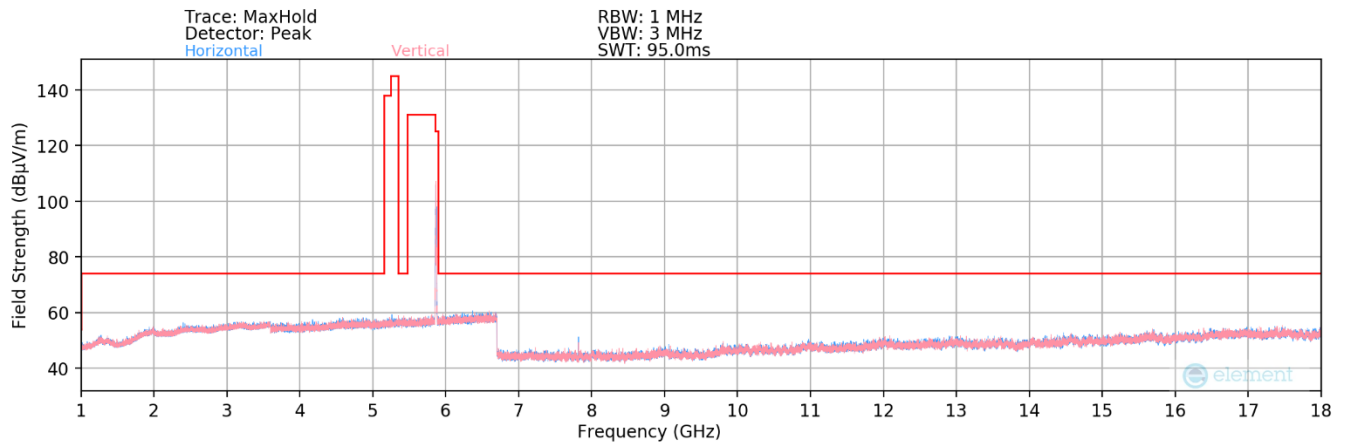


Plot 7-345. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U4 Ch. 173 – 26 Tones) – Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 262 of 316


V 9.0 02/01/2019

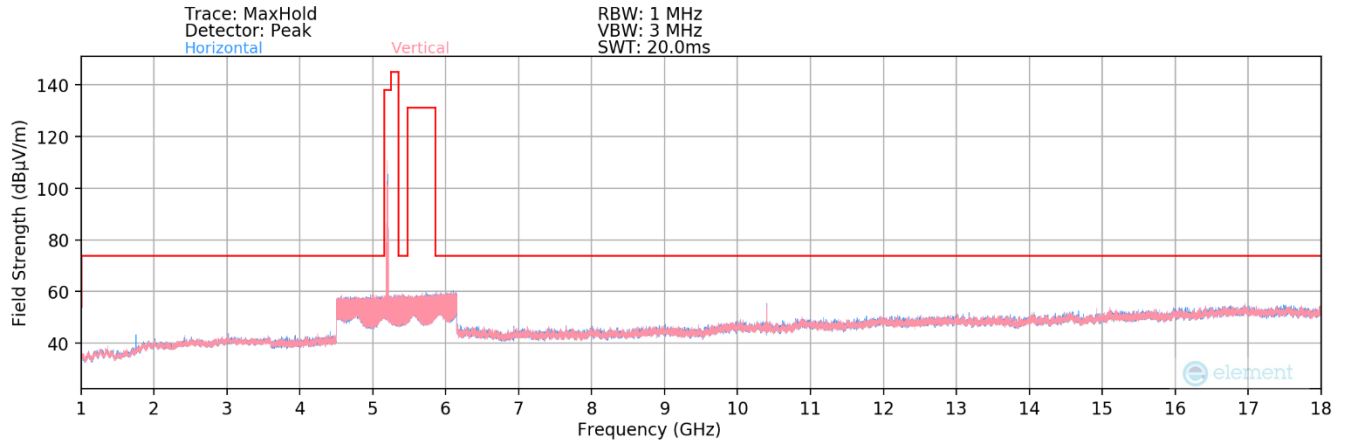

Plot 7-346. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U1 Ch. 40 – 26 Tones) – Half Open

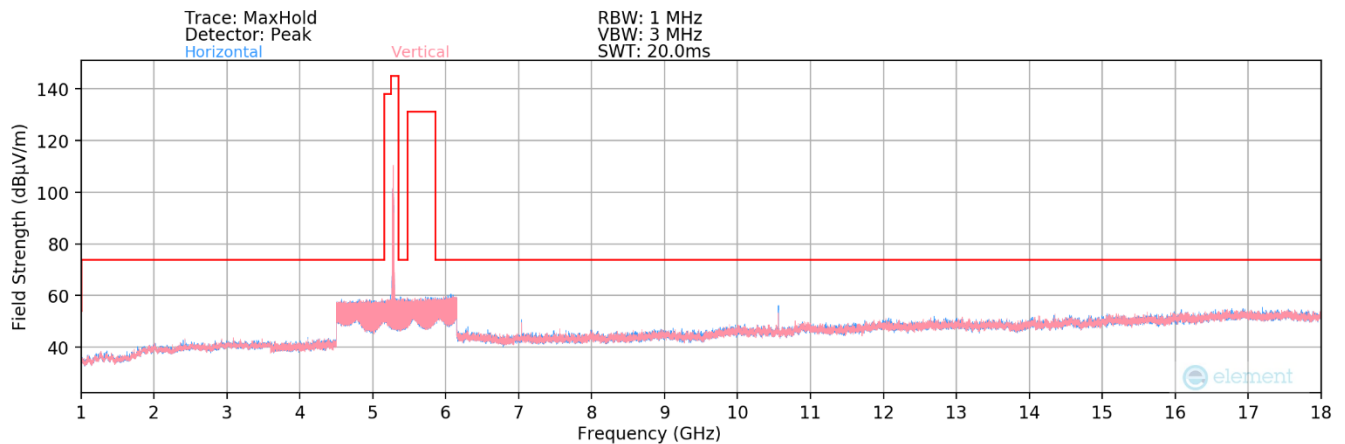


Plot 7-347. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2A Ch. 56 – 26 Tones) – Half Open

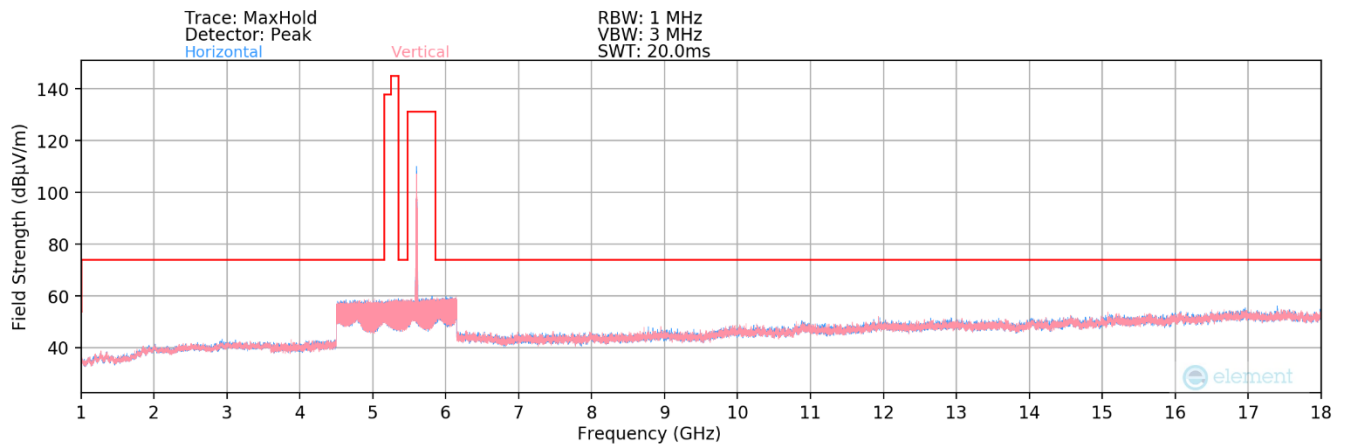


Plot 7-348. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2C Ch. 120 – 26 Tones) – Half Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 263 of 316

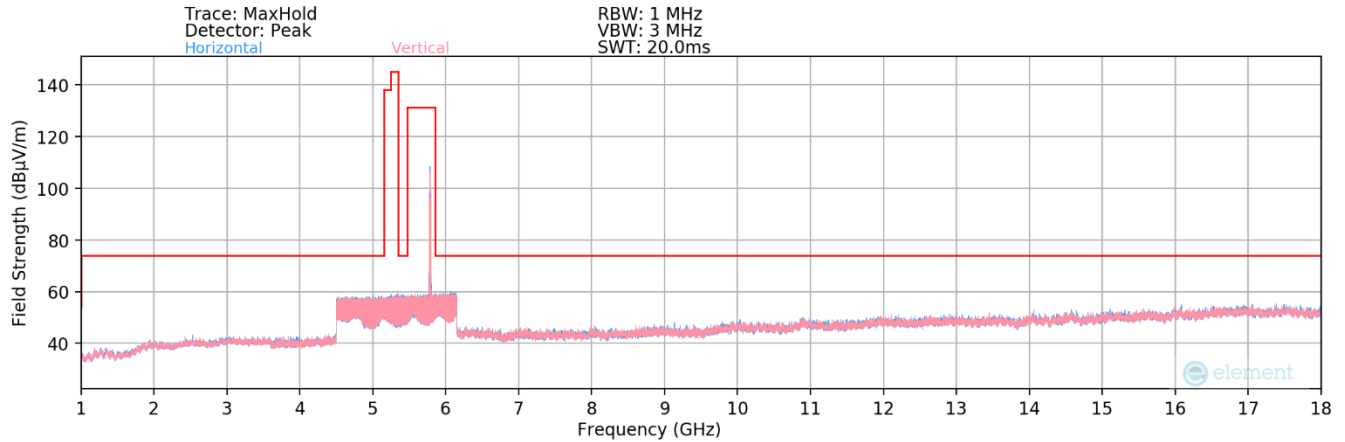

Plot 7-349. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U3 Ch. 157 – 26 Tones) – Half Open

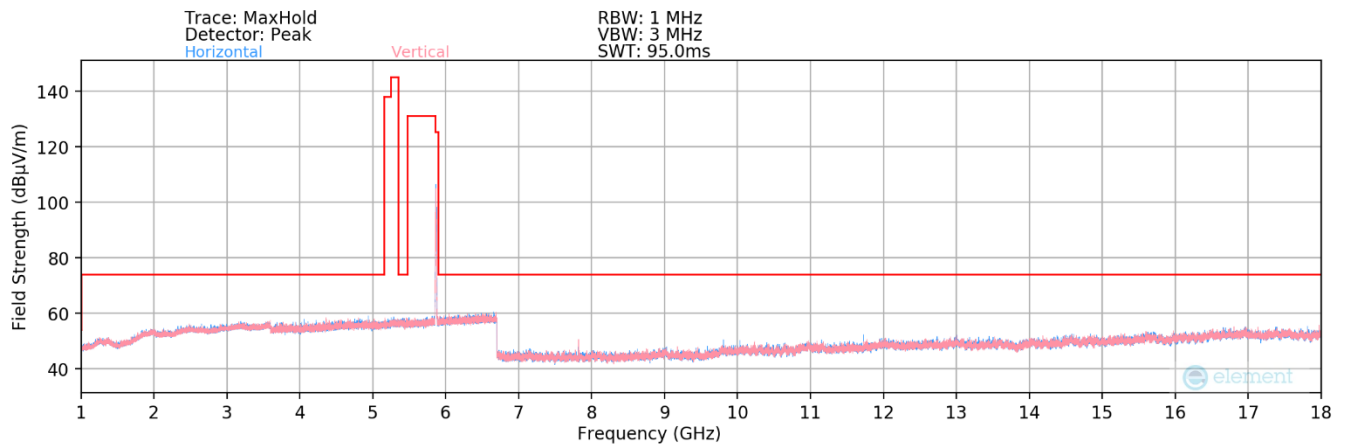


Plot 7-350. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U4 Ch. 173 – 26 Tones) – Half Open


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 264 of 316

V 9.0 02/01/2019

MIMO Radiated Spurious Emissions Measurements (Above 18GHz)

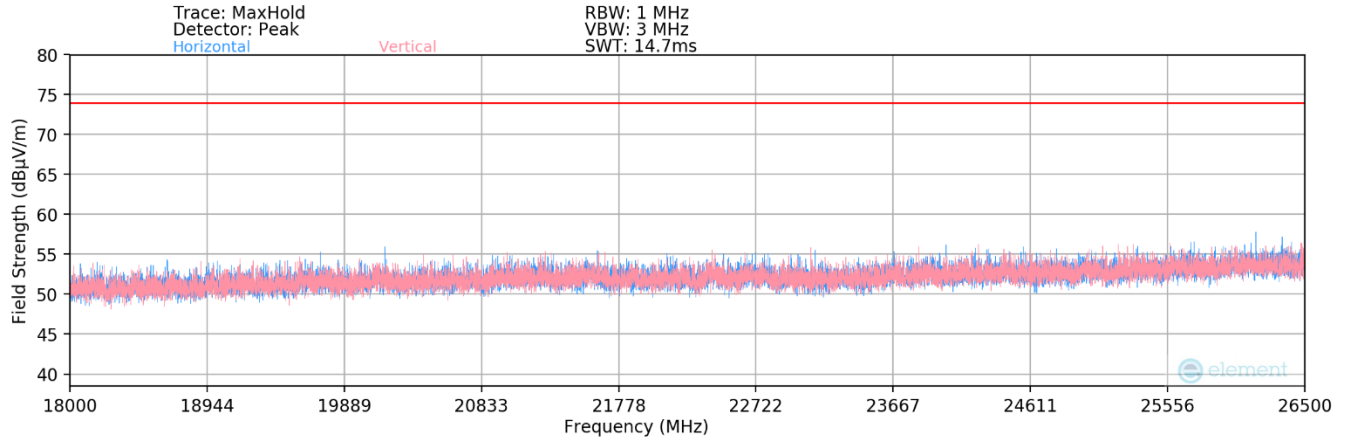


Plot 7-351. Radiated Spurious Plot 18GHz - 26.5GHz MIMO (802.11ax – 26 Tones) – Open

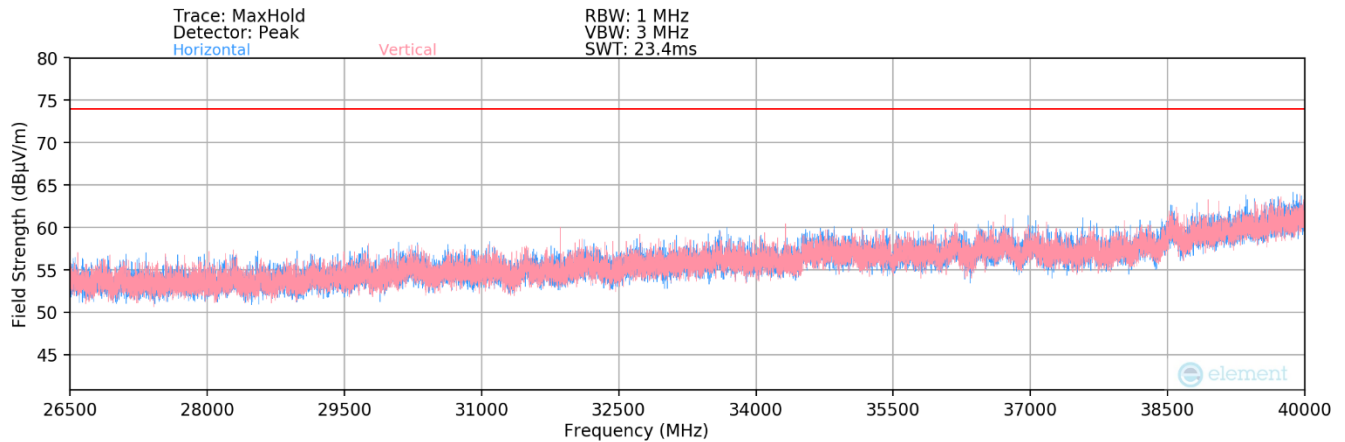


Plot 7-352. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax – 26 Tones) – Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 265 of 316

V 9.0 02/01/2019

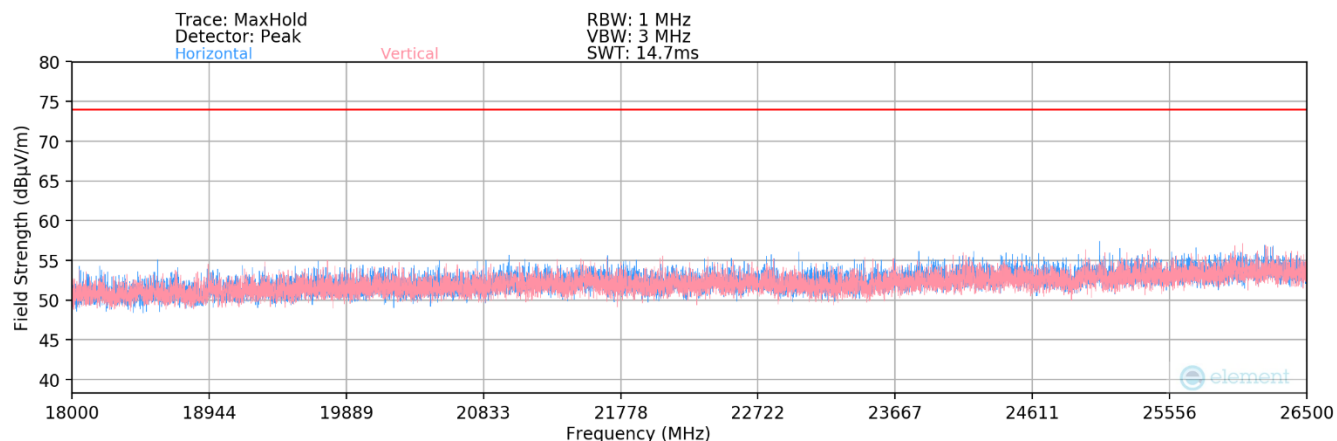

Plot 7-353. Radiated Spurious Plot 18GHz - 26.5GHz MIMO (802.11ax – 26 Tones) – Half Open

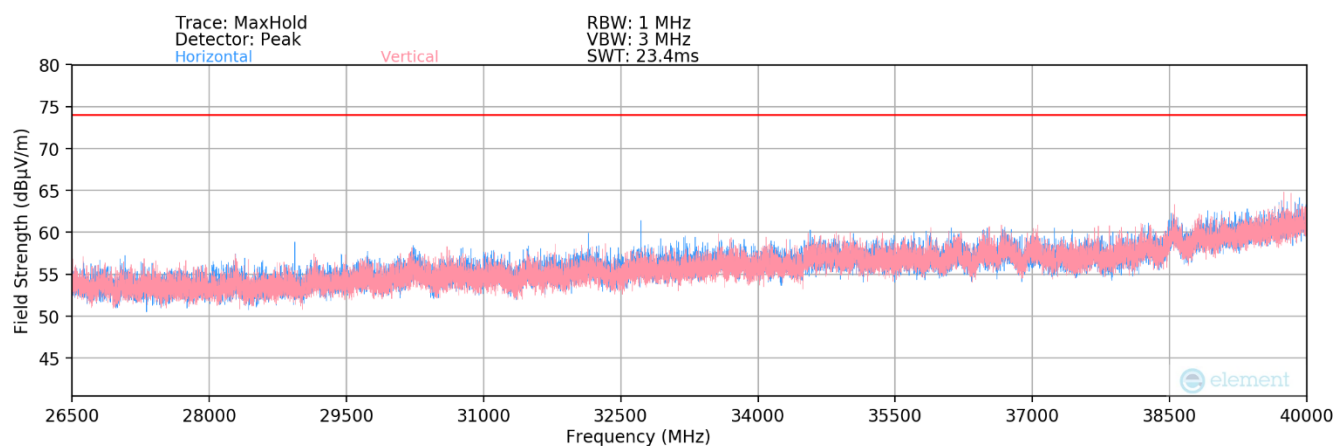

Plot 7-354. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax – 26 Tones) – Half Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 266 of 316

V 9.0 02/01/2019



MIMO Radiated Spurious Emission Measurements (26 Tones)

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax (20MHz BW)
Worst Case Transfer Rate: MCS0
RU Index: 0
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	215	335	-55.16	11.85	63.69	68.20	-4.51
* 15540.00	Average	H	-	-	-80.38	16.63	43.25	53.98	-10.73
* 15540.00	Peak	H	-	-	-68.96	16.63	54.67	73.98	-19.31
* 20720.00	Average	H	-	-	-66.62	3.15	33.99	53.98	-19.99
* 20720.00	Peak	H	-	-	-58.13	3.15	42.47	73.98	-31.50
25900.00	Peak	H	-	-	-58.33	4.77	43.90	68.20	-24.30

Table 7-129. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
Worst Case Transfer Rate: MCS0
RU Index: 0
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	208	338	-55.52	11.49	62.97	68.20	-5.23
* 15600.00	Average	H	-	-	-80.13	16.85	43.72	53.98	-10.26
* 15600.00	Peak	H	-	-	-68.39	16.85	55.46	73.98	-18.52
* 20800.00	Average	H	-	-	-66.42	3.48	34.52	53.98	-19.46
* 20800.00	Peak	H	-	-	-57.18	3.48	43.76	73.98	-30.22
26000.00	Peak	H	-	-	-56.03	5.15	46.58	68.20	-21.62

Table 7-130. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 267 of 316

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	207	330	-56.23	12.01	62.78	68.20	-5.42
* 15720.00	Average	H	-	-	-80.31	17.21	43.90	53.98	-10.08
* 15720.00	Peak	H	-	-	-68.23	17.21	55.98	73.98	-18.00
* 20960.00	Average	H	-	-	-67.75	3.48	33.19	53.98	-20.79
* 20960.00	Peak	H	-	-	-58.09	3.48	42.85	73.98	-31.13
26200.00	Peak	H	-	-	-55.68	4.78	46.56	68.20	-21.64

Table 7-131. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	202	308	-55.77	12.54	63.77	68.20	-4.43
* 15780.00	Average	H	-	-	-80.45	17.03	43.58	53.98	-10.40
* 15780.00	Peak	H	-	-	-68.55	17.03	55.48	73.98	-18.50
* 21040.00	Average	H	-	-	-67.78	3.53	33.21	53.98	-20.77
* 21040.00	Peak	H	-	-	-59.36	3.53	41.63	73.98	-32.35
26300.00	Peak	H	-	-	-57.39	4.64	44.71	68.20	-23.49

Table 7-132. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 268 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	204	306	-56.84	12.39	62.55	68.20	-5.65
* 15840.00	Average	H	-	-	-80.51	16.71	43.20	53.98	-10.78
* 15840.00	Peak	H	-	-	-68.97	16.71	54.74	73.98	-19.24
* 21120.00	Average	H	-	-	-66.96	3.68	34.18	53.98	-19.80
* 21120.00	Peak	H	-	-	-57.43	3.68	43.71	73.98	-30.27
26400.00	Peak	H	-	-	-57.41	4.78	44.83	68.20	-23.37

Table 7-133. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	334	71	-73.21	12.36	46.15	53.98	-7.83
* 10640.00	Peak	H	334	71	-58.89	12.36	60.47	73.98	-13.51
* 15960.00	Average	H	-	-	-80.82	18.25	44.43	53.98	-9.55
* 15960.00	Peak	H	-	-	-68.93	18.25	56.32	73.98	-17.66
* 21280.00	Average	H	-	-	-67.29	3.72	33.89	53.98	-20.09
* 21280.00	Peak	H	-	-	-57.35	3.72	43.83	73.98	-30.15
26600.00	Peak	H	-	-	-56.99	4.72	45.19	68.20	-23.01

Table 7-134. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 269 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	208	368	-77.61	12.61	42.00	53.98	-11.98
* 11000.00	Peak	H	208	368	-64.36	12.61	55.25	73.98	-18.73
16500.00	Peak	H	-	-	-67.95	18.00	57.05	68.20	-11.15
22000.00	Peak	H	-	-	-56.58	3.83	44.70	68.20	-23.50
27500.00	Peak	H	-	-	-55.93	4.96	46.49	68.20	-21.71

Table 7-135. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	H	178	93	-77.87	12.49	41.62	53.98	-12.36
* 11200.00	Peak	H	178	93	-63.23	12.49	56.26	73.98	-17.72
16800.00	Peak	H	-	-	-68.53	18.32	56.79	68.20	-11.41
* 22400.00	Average	H	-	-	-66.42	3.79	34.83	53.98	-19.15
* 22400.00	Peak	H	-	-	-56.46	3.79	44.79	73.98	-29.19
28000.00	Peak	H	-	-	-58.13	4.94	44.27	68.20	-23.93

Table 7-136. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 270 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	190	323	-78.62	12.91	41.29	53.98	-12.68
*	11440.00	Peak	H	190	323	-66.47	12.91	53.44	73.98	-20.53
	17160.00	Peak	H	-	-	-68.35	17.87	56.52	68.20	-11.68
*	22880.00	Average	H	-	-	-66.77	3.79	34.47	53.98	-19.51
*	22880.00	Peak	H	-	-	-59.38	3.79	41.87	73.98	-32.11
	28600.00	Peak	H	-	-	-57.35	5.27	45.38	68.20	-22.82

Table 7-137. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	H	202	318	-78.70	13.32	41.62	53.98	-12.35
*	11490.00	Peak	H	202	318	-66.12	13.32	54.20	73.98	-19.77
	17235.00	Peak	H	-	-	-68.14	17.85	56.71	68.20	-11.49
*	22980.00	Average	H	-	-	-67.18	3.79	34.07	53.98	-19.91
*	22980.00	Peak	H	-	-	-58.40	3.79	42.85	73.98	-31.13
	28725.00	Peak	H	-	-	-58.33	5.41	44.54	68.20	-23.66

Table 7-138. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 271 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	172	310	-78.18	12.93	41.75	53.98	-12.23
* 11570.00	Peak	H	172	310	-65.77	12.93	54.16	73.98	-19.82
17355.00	Peak	H	-	-	-68.57	18.36	56.79	68.20	-11.41
23140.00	Peak	H	-	-	-56.72	3.75	44.49	68.20	-23.71
28925.00	Peak	H	-	-	-57.28	5.46	45.63	68.20	-22.57

Table 7-139. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	159	316	-78.88	13.82	41.94	53.98	-12.04
* 11650.00	Peak	H	159	316	-66.17	13.82	54.65	73.98	-19.33
17475.00	Peak	H	-	-	-68.42	17.74	56.32	68.20	-11.88
23300.00	Peak	H	-	-	-57.50	3.76	43.72	68.20	-24.48
29125.00	Peak	H	-	-	-56.69	5.54	46.31	68.20	-21.89

Table 7-140. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 272 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11690.00	Average	H	140	318	-78.57	13.65	0.00	42.08	53.98	-11.90
* 11690.00	Peak	H	140	318	-66.14	13.65	0.00	54.51	73.98	-19.47
17535.00	Peak	H	-	-	-67.63	17.82	0.00	57.19	68.20	-11.01
23380.00	Peak	H	-	-	-56.11	3.85	-9.54	54.74	68.20	-13.46
29225.00	Peak	H	-	-	-56.48	5.60	-9.54	56.12	68.20	-12.08
35070.00	Peak	H	-	-	-54.28	8.11	-9.54	60.83	68.20	-7.37

Table 7-141. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11730.00	Average	H	144	309	-78.77	13.70	0.00	41.93	53.98	-12.05
* 11730.00	Peak	H	144	309	-66.47	13.70	0.00	54.23	73.98	-19.75
17595.00	Peak	H	-	-	-68.02	17.70	0.00	56.68	68.20	-11.52
23460.00	Peak	H	-	-	-55.90	3.85	-9.54	54.96	68.20	-13.24
29325.00	Peak	H	-	-	-55.82	5.85	-9.54	57.03	68.20	-11.17
35190.00	Peak	H	-	-	-54.66	8.16	-9.54	60.50	68.20	-7.70

Table 7-142. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 273 of 316


Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	H	136	315	-78.11	13.81	0.00	42.70	53.98	-11.28
* 11770.00	Peak	H	136	315	-65.30	13.81	0.00	55.51	73.98	-18.47
17655.00	Peak	H	-	-	-68.40	17.52	0.00	56.12	68.20	-12.08
23540.00	Peak	H	-	-	-55.71	3.84	-9.54	55.14	68.20	-13.06
29425.00	Peak	H	-	-	-54.95	5.87	-9.54	57.92	68.20	-10.28
35310.00	Peak	H	-	-	-54.18	8.04	-9.54	60.86	68.20	-7.34


Table 7-143. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 274 of 316


242 Tones

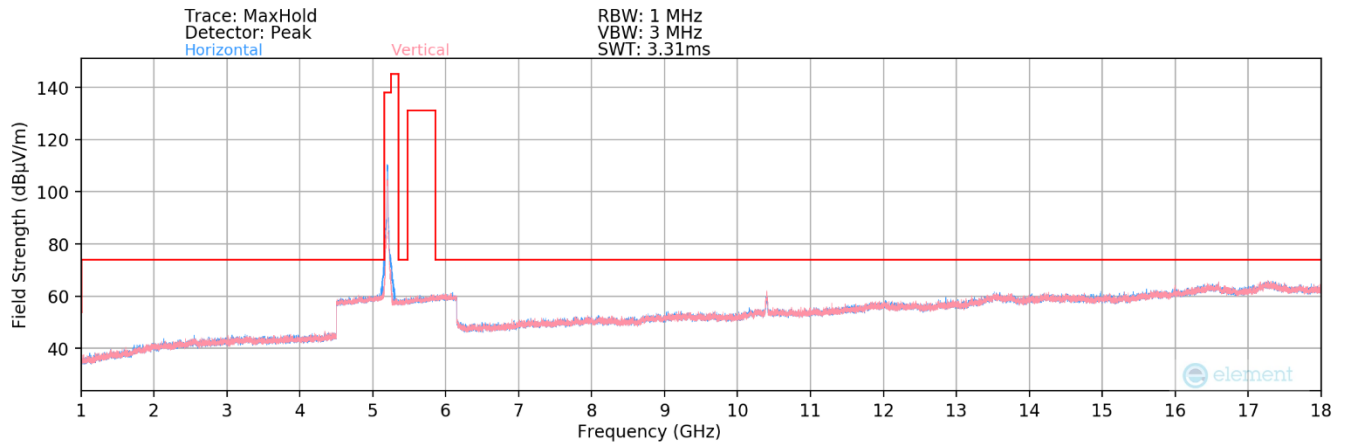

Plot 7-355. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U1 Ch. 40 – 242 Tones) – Open

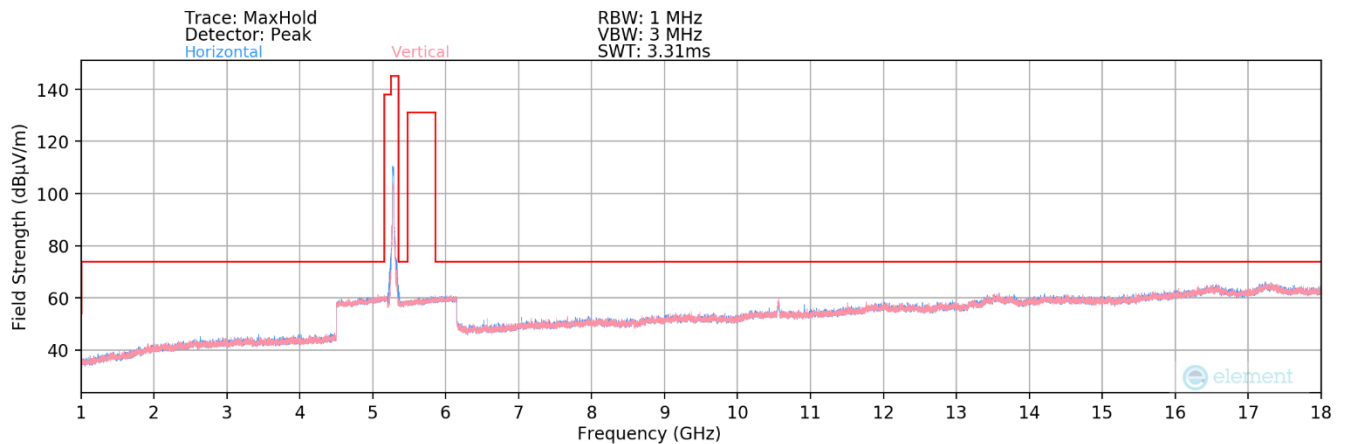

Plot 7-356. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2A Ch. 56 – 242 Tones) – Open

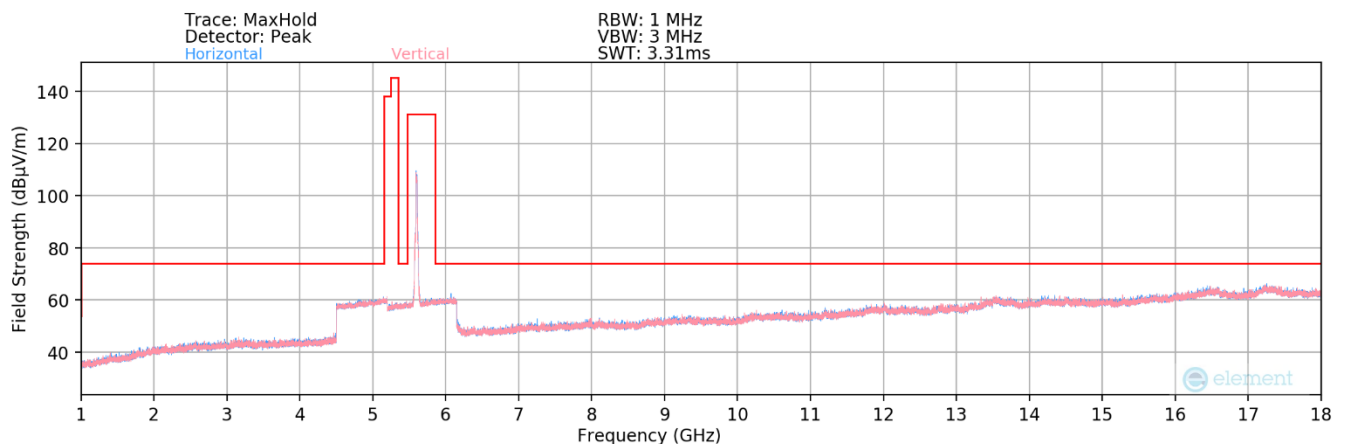


Plot 7-357. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2C Ch. 120 – 242 Tones) – Open


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 275 of 316

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

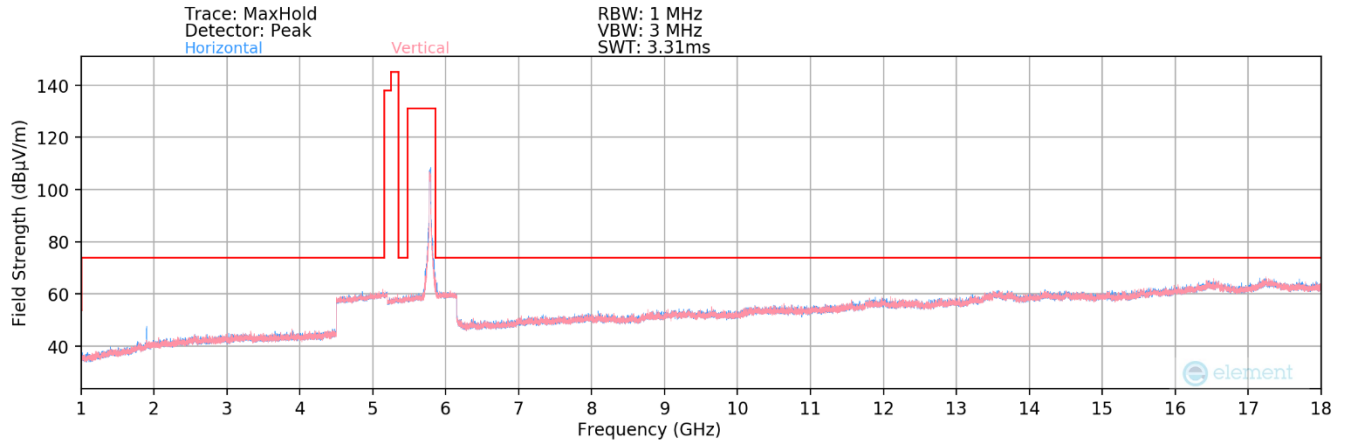


Plot 7-358. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U3 Ch. 157 – 242 Tones) – Open

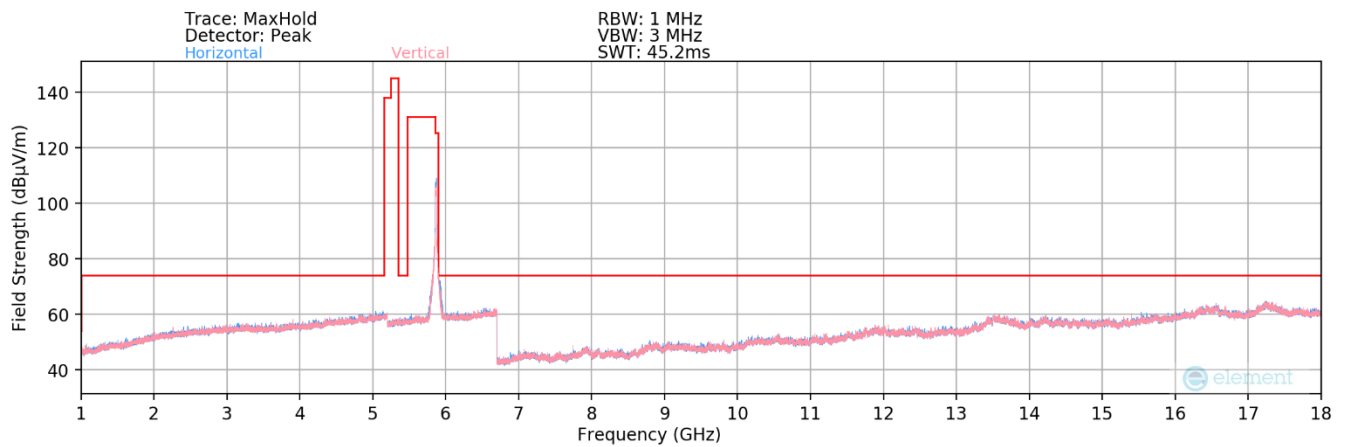


Plot 7-359. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U4 Ch. 173 – 242 Tones) – Open


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 276 of 316

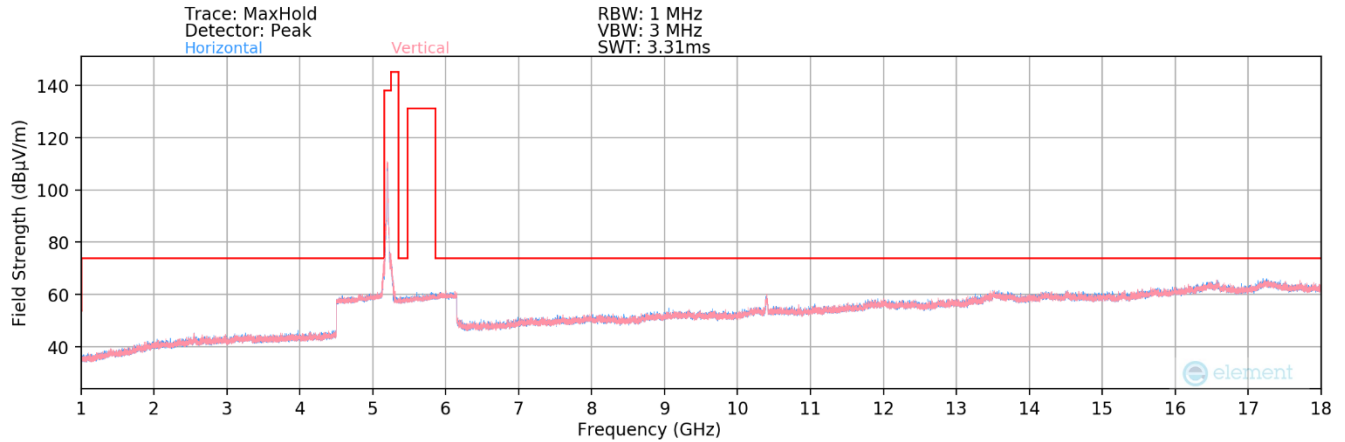

Plot 7-360. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U1 Ch. 40 – 242 Tones) – Half Open

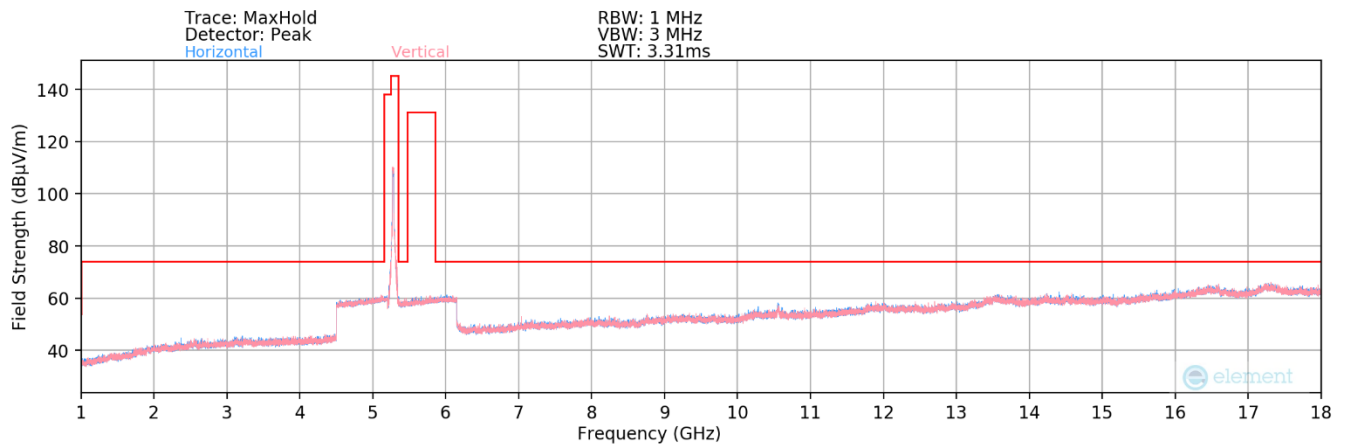


Plot 7-361. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2A Ch. 56 – 242 Tones) – Half Open

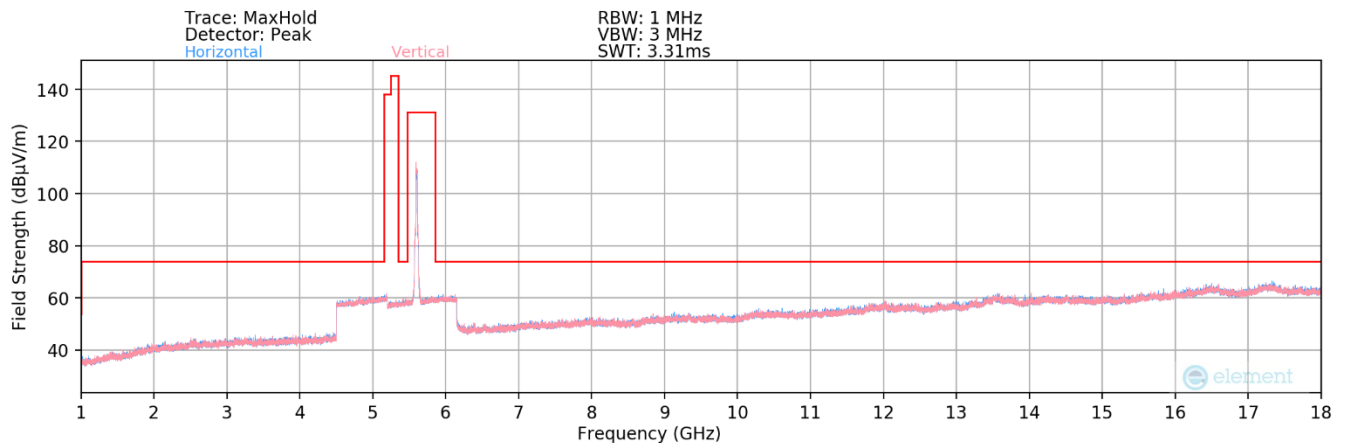


Plot 7-362. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2C Ch. 120 – 242 Tones) – Half Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 277 of 316

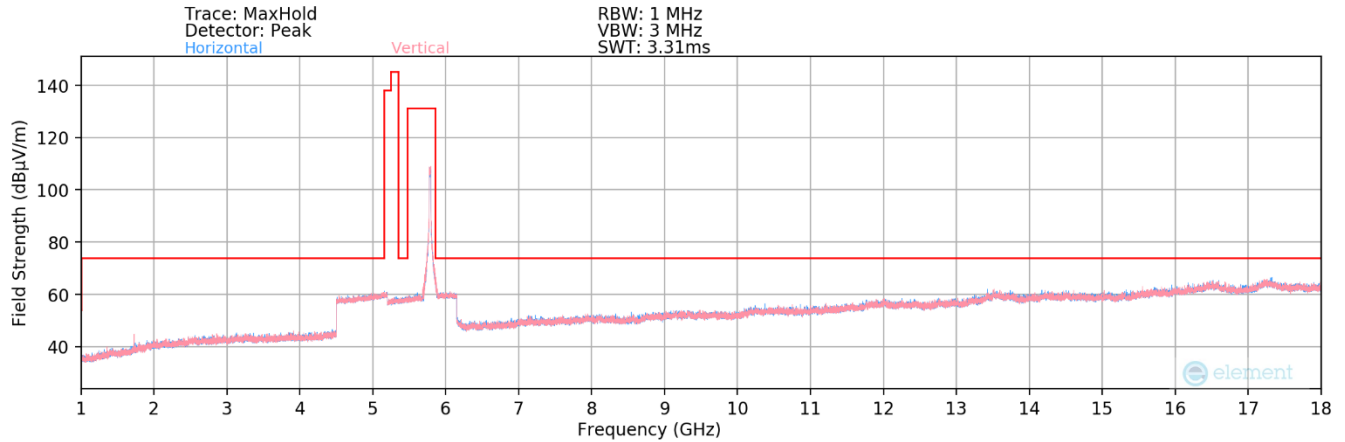

Plot 7-363. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U3 Ch. 157 – 242 Tones) – Half Open

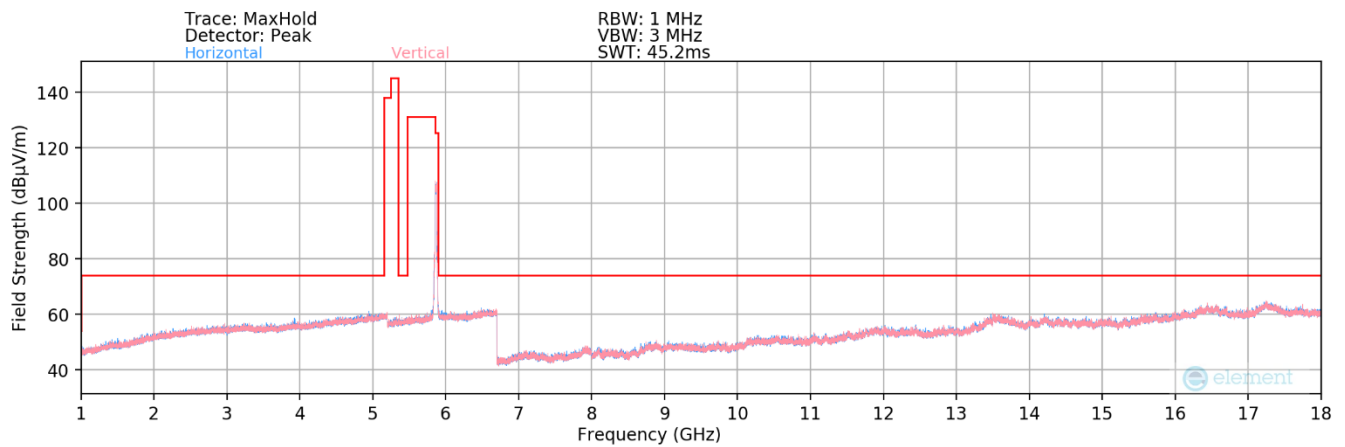


Plot 7-364. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U4 Ch. 173 – 242 Tones) – Half Open


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 278 of 316

V 9.0 02/01/2019

MIMO Radiated Spurious Emissions Measurements (Above 18GHz)

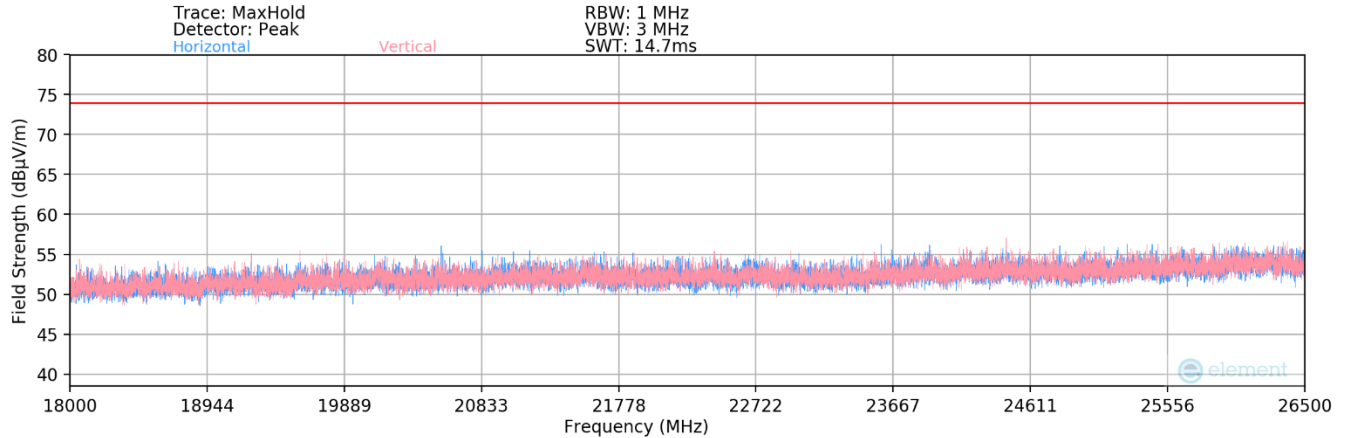


Plot 7-365. Radiated Spurious Plot 18GHz - 26.5GHz MIMO (802.11ax – 242 Tones) – Open

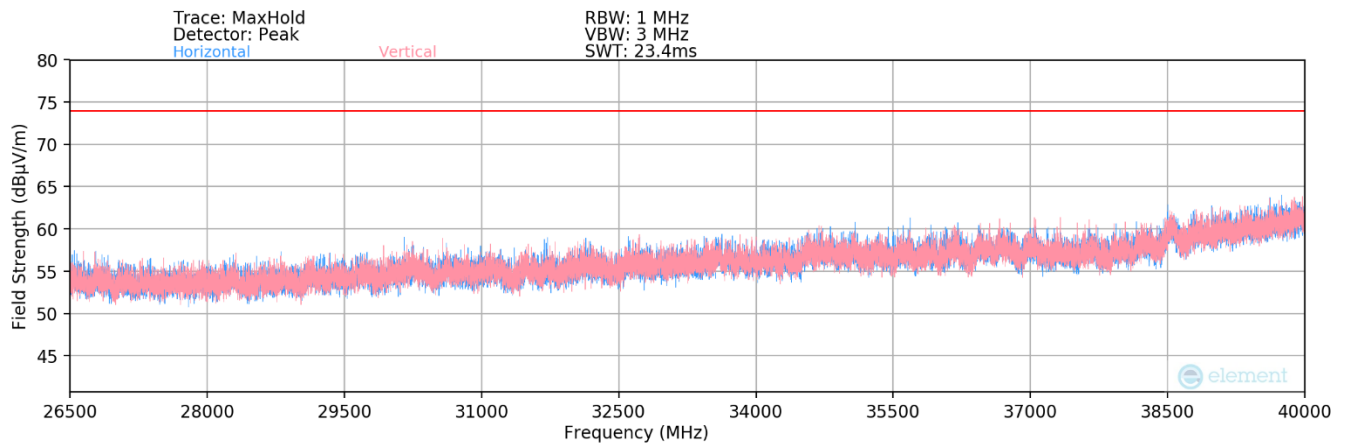


Plot 7-366. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax – 242 Tones) – Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 279 of 316

V 9.0 02/01/2019

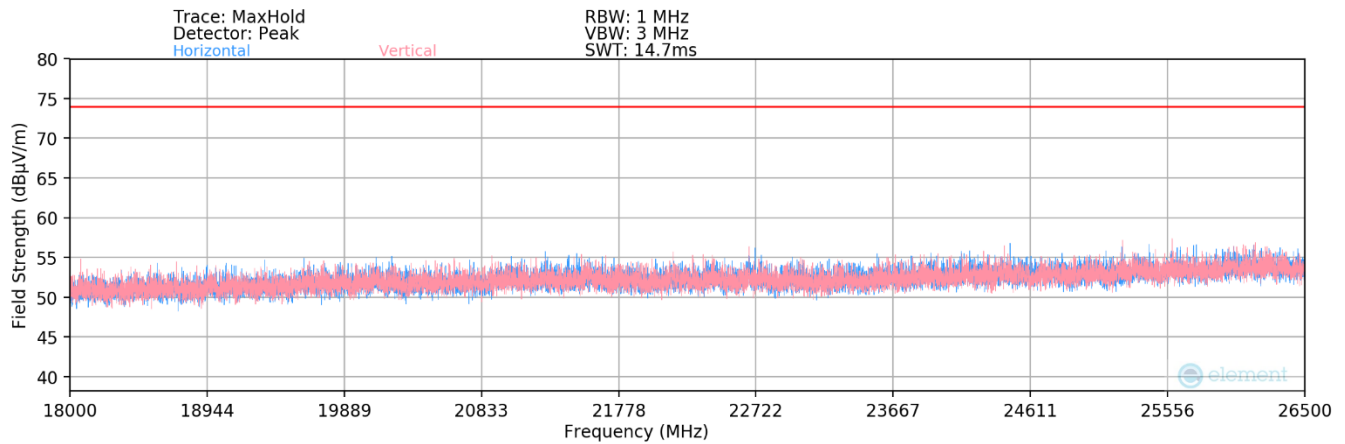

Plot 7-367. Radiated Spurious Plot 18GHz - 26.5GHz MIMO (802.11ax – 242 Tones) – Half Open

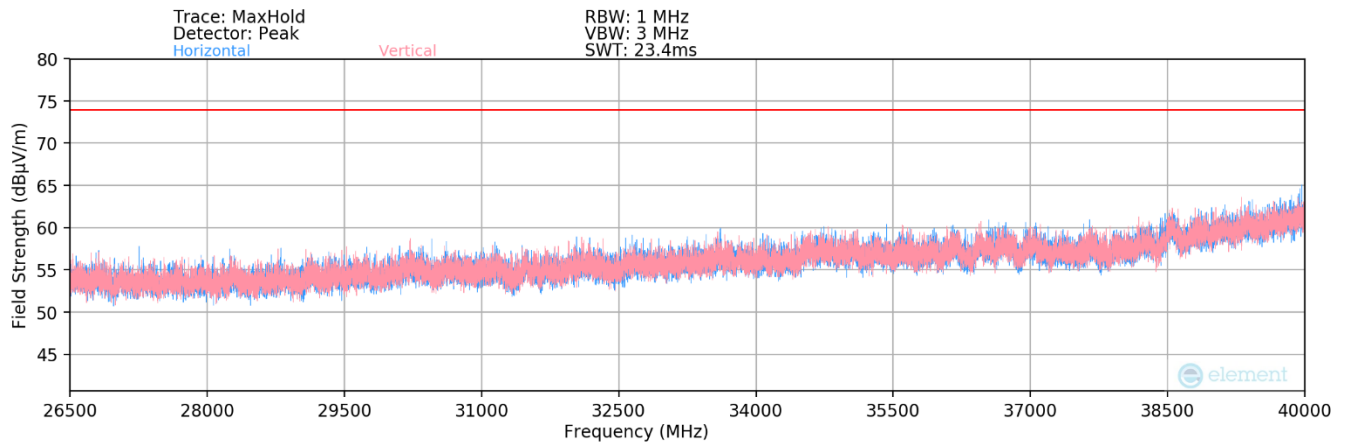

Plot 7-368. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax – 242 Tones) – Half Open

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 280 of 316

V 9.0 02/01/2019

MIMO Radiated Spurious Emission Measurements (242 Tones)

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax (20MHz BW)
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	208	337	-54.75	11.85	0.00	64.10	68.20	-4.10
* 15540.00	Average	H	-	-	-80.37	16.63	0.00	43.26	53.98	-10.72
* 15540.00	Peak	H	-	-	-68.90	16.63	0.00	54.73	73.98	-19.25
* 20720.00	Average	H	-	-	-67.28	3.15	-9.54	33.33	53.98	-20.65
* 20720.00	Peak	H	-	-	-57.13	3.15	-9.54	43.48	73.98	-30.50
25900.00	Peak	H	-	-	-59.05	4.77	-9.54	43.18	68.20	-25.02

Table 7-144. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	212	336	-54.77	11.49	0.00	63.72	68.20	-4.48
* 15600.00	Average	H	-	-	-80.20	16.85	0.00	43.65	53.98	-10.33
* 15600.00	Peak	H	-	-	-68.04	16.85	0.00	55.81	73.98	-18.17
* 20800.00	Average	H	-	-	-66.40	3.48	-9.54	34.53	53.98	-19.44
* 20800.00	Peak	H	-	-	-56.13	3.48	-9.54	44.81	73.98	-29.17
26000.00	Peak	H	-	-	-58.87	5.15	-9.54	43.74	68.20	-24.46

Table 7-145. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 281 of 316

V 9.0 02/01/2019

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	201	335	-56.91	12.01	0.00	62.10	68.20	-6.10
* 15720.00	Average	H	-	-	-80.30	17.21	0.00	43.91	53.98	-10.07
* 15720.00	Peak	H	-	-	-67.79	17.21	0.00	56.42	73.98	-17.56
* 20960.00	Average	H	-	-	-67.41	3.48	-9.54	33.53	53.98	-20.45
* 20960.00	Peak	H	-	-	-57.61	3.48	-9.54	43.32	73.98	-30.65
26200.00	Peak	H	-	-	-59.03	4.78	-9.54	43.21	68.20	-24.99

Table 7-146. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	198	307	-56.37	12.54	0.00	63.17	68.20	-5.03
* 15780.00	Average	H	-	-	-80.48	17.03	0.00	43.55	53.98	-10.43
* 15780.00	Peak	H	-	-	-68.44	17.03	0.00	55.59	73.98	-18.39
* 21040.00	Average	H	-	-	-66.81	3.53	-9.54	34.18	53.98	-19.80
* 21040.00	Peak	H	-	-	-56.89	3.53	-9.54	44.10	73.98	-29.88
26300.00	Peak	H	-	-	-57.89	4.64	-9.54	44.21	68.20	-23.99

Table 7-147. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 282 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	194	307	-57.24	12.39	0.00	62.15	68.20	-6.05
* 15840.00	Average	H	-	-	-80.60	16.71	0.00	43.11	53.98	-10.87
* 15840.00	Peak	H	-	-	-69.01	16.71	0.00	54.70	73.98	-19.28
* 21120.00	Average	H	-	-	-66.52	3.68	-9.54	34.62	53.98	-19.36
* 21120.00	Peak	H	-	-	-57.60	3.68	-9.54	43.54	73.98	-30.44
26400.00	Peak	H	-	-	-57.38	4.78	-9.54	44.86	68.20	-23.34

Table 7-148. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	257	68	-71.28	12.36	0.00	48.08	53.98	-5.90
* 10640.00	Peak	H	257	68	-58.93	12.36	0.00	60.43	73.98	-13.55
* 15960.00	Average	H	-	-	-80.82	18.25	0.00	44.43	53.98	-9.55
* 15960.00	Peak	H	-	-	-69.09	18.25	0.00	56.16	73.98	-17.82
* 21280.00	Average	H	-	-	-66.82	3.72	-9.54	34.36	53.98	-19.62
* 21280.00	Peak	H	-	-	-57.60	3.72	-9.54	43.57	73.98	-30.41
26600.00	Peak	H	-	-	-59.33	4.72	-9.54	42.85	68.20	-25.35

Table 7-149. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 283 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	210	318	-76.18	12.61	0.00	43.43	53.98	-10.55
* 11000.00	Peak	H	210	318	-63.68	12.61	0.00	55.93	73.98	-18.05
16500.00	Peak	H	-	-	-67.81	18.00	0.00	57.19	68.20	-11.01
22000.00	Peak	H	-	-	-57.66	3.83	-9.54	43.62	68.20	-24.58
27500.00	Peak	H	-	-	-56.85	4.96	-9.54	45.56	68.20	-22.64

Table 7-150. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	H	224	98	-76.69	12.49	0.00	42.80	53.98	-11.18
* 11200.00	Peak	H	224	98	-64.26	12.49	0.00	55.23	73.98	-18.75
16800.00	Peak	H	-	-	-68.95	18.32	0.00	56.37	68.20	-11.83
* 22400.00	Average	H	-	-	-67.24	3.79	-9.54	34.01	53.98	-19.97
* 22400.00	Peak	H	-	-	-56.38	3.79	-9.54	44.87	73.98	-29.11
28000.00	Peak	H	-	-	-57.73	4.94	-9.54	44.67	68.20	-23.53

Table 7-151. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset		Page 284 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	194	316	-76.74	12.91	0.00	43.17	53.98	-10.80
*	11440.00	Peak	H	194	316	-63.43	12.91	0.00	56.48	73.98	-17.49
	17160.00	Peak	H	-	-	-67.88	17.87	0.00	56.99	68.20	-11.21
*	22880.00	Average	H	-	-	-67.25	3.79	-9.54	34.00	53.98	-19.98
*	22880.00	Peak	H	-	-	-58.80	3.79	-9.54	42.44	73.98	-31.54
	28600.00	Peak	H	-	-	-57.36	5.27	-9.54	45.37	68.20	-22.83

Table 7-152. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11490.00	Average	H	200	315	-77.11	13.32	0.00	43.21	53.98	-10.76
*	11490.00	Peak	H	200	315	-63.83	13.32	0.00	56.49	73.98	-17.48
	17235.00	Peak	H	-	-	-68.48	17.85	0.00	56.37	68.20	-11.83
*	22980.00	Average	H	-	-	-67.57	3.79	-9.54	33.68	53.98	-20.30
*	22980.00	Peak	H	-	-	-57.69	3.79	-9.54	43.56	73.98	-30.42
	28725.00	Peak	H	-	-	-60.58	5.41	-9.54	42.29	68.20	-25.91

Table 7-153. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 285 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	167	316	-76.73	12.93	0.00	43.20	53.98	-10.78
* 11570.00	Peak	H	167	316	-63.81	12.93	0.00	56.12	73.98	-17.86
17355.00	Peak	H	-	-	-68.45	18.36	0.00	56.91	68.20	-11.29
23140.00	Peak	H	-	-	-56.36	3.75	-9.54	44.85	68.20	-23.35
28925.00	Peak	H	-	-	-58.72	5.46	-9.54	44.20	68.20	-24.00

Table 7-154. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	152	314	-77.12	13.82	0.00	43.70	53.98	-10.28
* 11650.00	Peak	H	152	314	-64.01	13.82	0.00	56.81	73.98	-17.17
17475.00	Peak	H	-	-	-68.25	17.74	0.00	56.49	68.20	-11.71
23300.00	Peak	H	-	-	-57.71	3.76	-9.54	43.51	68.20	-24.69
29125.00	Peak	H	-	-	-56.94	5.54	-9.54	46.06	68.20	-22.14

Table 7-155. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 286 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11690.00	Average	H	129	319	-77.06	13.65	0.00	43.59	53.98	-10.39
* 11690.00	Peak	H	129	319	-64.32	13.65	0.00	56.33	73.98	-17.65
17535.00	Peak	H	-	-	-68.34	17.82	0.00	56.48	68.20	-11.72
23380.00	Peak	H	-	-	-55.72	3.85	-9.54	55.13	68.20	-13.07
29225.00	Peak	H	-	-	-55.87	5.60	-9.54	56.73	68.20	-11.47
35070.00	Peak	H	-	-	-55.01	8.11	-9.54	60.11	68.20	-8.09

Table 7-156. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11730.00	Average	H	205	320	-78.29	13.70	0.00	42.41	53.98	-11.57
* 11730.00	Peak	H	205	320	-66.22	13.70	0.00	54.48	73.98	-19.50
17595.00	Peak	H	-	-	-67.59	17.70	0.00	57.11	68.20	-11.09
23460.00	Peak	H	-	-	-55.68	3.85	-9.54	55.17	68.20	-13.03
29325.00	Peak	H	-	-	-55.49	5.85	-9.54	57.36	68.20	-10.84
35190.00	Peak	H	-	-	-54.68	8.16	-9.54	60.48	68.20	-7.72

Table 7-157. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 287 of 316

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	H	131	313	-76.56	13.81	0.00	44.25	53.98	-9.73
* 11770.00	Peak	H	131	313	-63.88	13.81	0.00	56.93	73.98	-17.05
17655.00	Peak	H	-	-	-68.23	17.52	0.00	56.29	68.20	-11.91
23540.00	Peak	H	-	-	-55.85	3.84	-9.54	55.00	68.20	-13.20
29425.00	Peak	H	-	-	-56.26	5.87	-9.54	56.61	68.20	-11.59
35310.00	Peak	H	-	-	-54.23	8.04	-9.54	60.81	68.20	-7.39

Table 7-158. Radiated Measurements MIMO (242 Tones)


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 288 of 316

7.6.3 SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

106 Tones

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

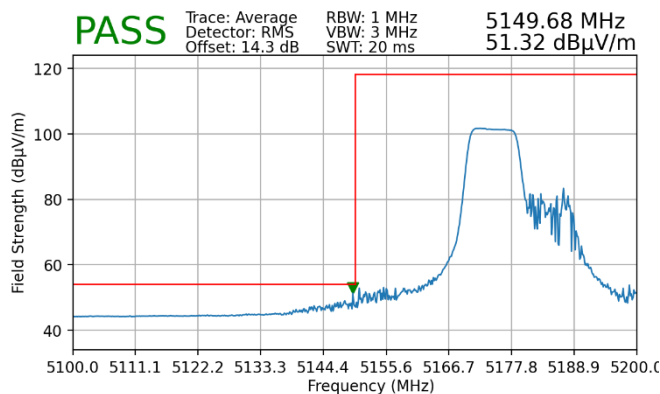


Plot 7-369. Radiated Lower Band Edge Plot SISO ANT1 (Average - UNII Band 1 - 106 Tones)

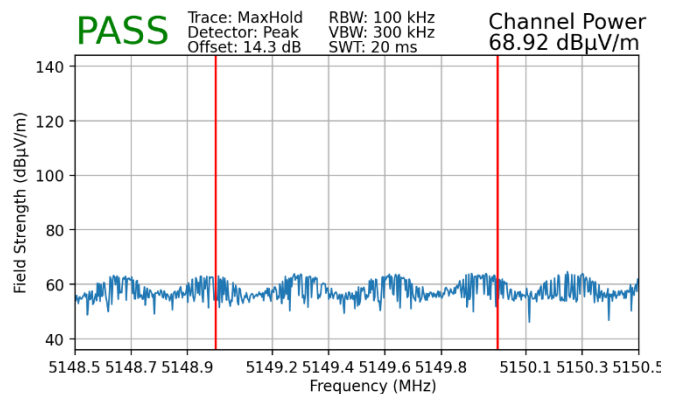


Plot 7-370. Radiated Lower Band Edge Plot SISO ANT1 (Peak - UNII Band 1 - 106 Tones)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

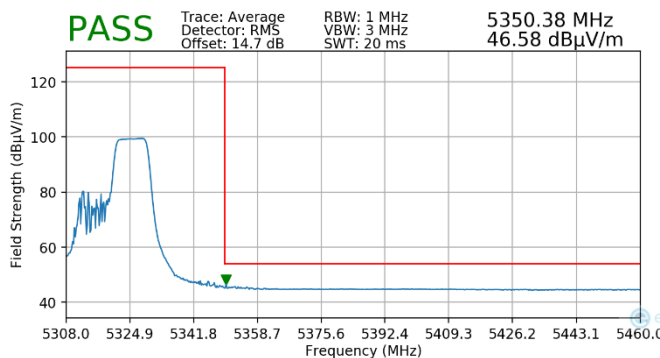


Plot 7-371. Radiated Upper Band Edge Plot SISO ANT1 (Average - UNII Band 2A - 106 Tones)

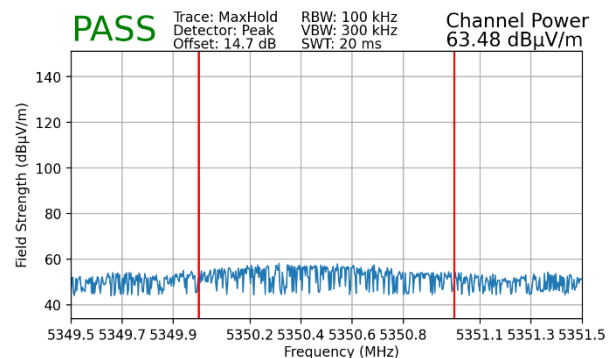


Plot 7-372. Radiated Upper Band Edge Plot SISO ANT1 (Peak - UNII Band 2A - 106 Tones)

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 289 of 316

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

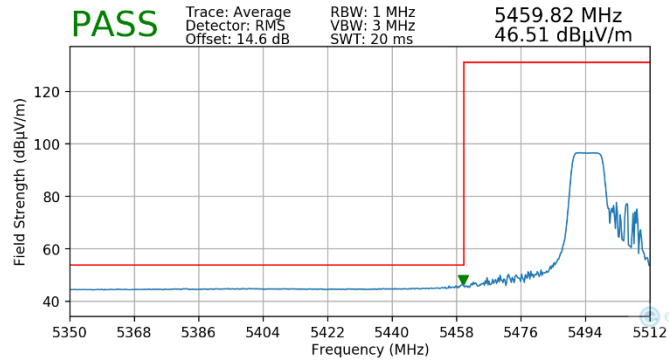


Plot 7-373. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C – 106 Tones)

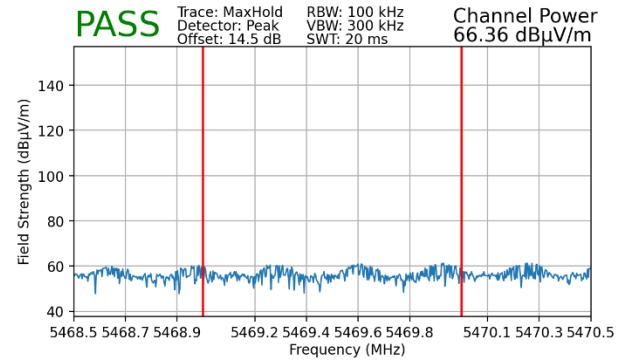

Plot 7-374. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C – 106 Tones)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

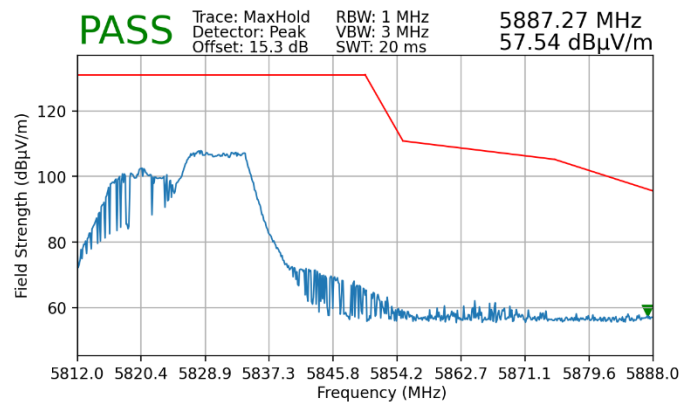

Plot 7-375. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3 – 106 Tones)


FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 290 of 316

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5845MHz
Channel:	169

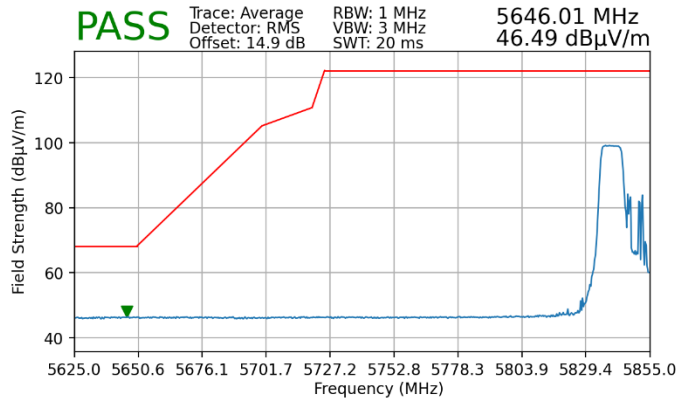

**Plot 7-376. Radiated Lower Band Edge Plot SISO
ANT1 (Peak - UNII Band 4 - 106 Tones)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5885MHz
Channel:	177

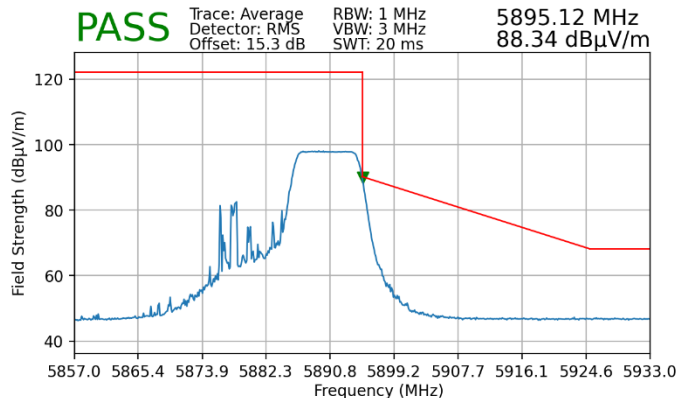

**Plot 7-377. Radiated Upper Band Edge Plot SISO
ANT1 (Peak - UNII Band 4 - 106 Tones)**

FCC ID: A3LSMF721U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-15.A3L	Test Dates: 4/8/2022-6/30/2022	EUT Type: Portable Handset	Page 291 of 316