

TEST REPORT

FCC DTS ax Test for SM-F761B
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2505-FC019

DATE OF ISSUE
May 7, 2025

Tested by
Sang Hoon Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2505-FC019

DATE OF ISSUE

May 07, 2025

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-F761B

FCC ID

A3LSMF761B

Date of Test

February 27, 2025 ~ April 29, 2025

FCC Classification

Digital Transmission System(DTS)

Test Standard Used

FCC Rule Part(s): Part 15.247

Test Results

PASS

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 07, 2025	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

Data referencing: DTS ax Report (Ch.1~Ch.11) (FCC ID: A3LSMF761U, Report No. HCT-RF-2504-FC050)
Full test: Ch.12~Ch.13.

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS	11
8. SUMMARY OF TEST RESULTS & DATA REFERENCING	28
9. TEST RESULT	30
9.1 DUTY CYCLE	30
9.2 6 dB BANDWIDTH	32
9.3 OUTPUT POWER	36
9.4 POWER SPECTRAL DENSITY	38
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS	41
9.6 RADIATED SPURIOUS EMISSIONS	48
9.7 RADIATED RESTRICTED BAND EDGES	52
9.7.1 Channel 1, 11	52
9.7.2 Channel 12, 13	54
10. LIST OF TEST EQUIPMENT	57
11. ANNEX A_ TEST SETUP PHOTO	59

1. EUT DESCRIPTION

Model	SM-F761B		
Additional Model	-		
EUT Type	Mobile Phone		
Power Supply	DC 3.88 V		
Frequency Range	2 412 MHz ~ 2 472 MHz		
Max. RF Output Power	<u>Peak Power</u>	SISO(Ant.1)	25.01 dBm
		SISO(Ant.2)	24.32 dBm
		MIMO_CDD(Ant.1+ Ant.2)	27.60 dBm
	<u>Average Power</u>	SISO(Ant.1)	15.98 dBm
		SISO(Ant.2)	15.15 dBm
		MIMO_CDD(Ant.1+ Ant.2)	18.59 dBm
Modulation Type	OFDM, OFDMA		
Number of Channels	13 Channels		
Antenna Specification	Type: Metal		
Serial number	Conducted : R3CY20BSA4W, R3CY20SGSSL Radiated : R3CY30G6GYT, R3CY30RGR2L		

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	ANT.1	ANT.2	CDD	SDM
802.11ax(HE20)	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

Simultaneous transmission Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT}/N_{SS})$$

Ant Gain (dBi)		N_{ANT}/N_{SS}	Directional Gain (dBi)	
			CDD	SDM
ANT.1	-5.31	2/2	-3.44	-5.31
ANT.2	-7.76			

Note

According to ANSI C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where G_N is the gain of the nth antenna and N_{ANT} is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log \left(\left(10^{(ANT.0 \text{ Gain}/20)} + 10^{(ANT.1 \text{ Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT}/N_{SS})$$

Sample MIMO Calculation:

Ex) ANT.1 : 11.58 dBm ANT.2 : 12.08 dBm

$$\text{MIMO} = \text{ANT.1} + \text{ANT.2}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ($\pm$ kHz)
X dB, 99% Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.54 (Confidence level about 95 %, $k=2$)
Conducted Output Power(Power Meter)	0.54 (Confidence level about 95 %, $k=2$)
Conducted Output Power(Signal Analyzer)	0.68 (Confidence level about 95 %, $k=2$)
Power Spectral Density	1.03 (Confidence level about 95 %, $k=2$)
Band Edge (Out of Band Emissions)	0.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge (Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Allow trace to fully stabilize.
- 8) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.06
100	20.14
200	20.17
300	20.21
400	20.28
500	20.28
600	20.28
700	20.28
800	20.30
900	20.31
1000	20.35
2000	20.55
2400	20.62
2500	20.67
3000	20.74
4000	20.86
5000	20.84
5850	20.83
6000	20.93
7000	20.97
8000	21.09
9000	21.18
10000	21.27
11000	21.33
12000	21.33
13000	21.40
14000	21.49
15000	21.52
16000	21.55
17000	21.63
18000	21.65
19000	21.66
20000	21.76
21000	21.82
22000	21.86
23000	21.90
24000	21.92
25000	22.04

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

3. Ant.1 Total Port offset = Attenuator loss + Cable loss + EUT cable loss(0.38 dB) = 21 dB

4. Ant.2 Total Port offset = Attenuator loss + Cable loss = 20.62 dB


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

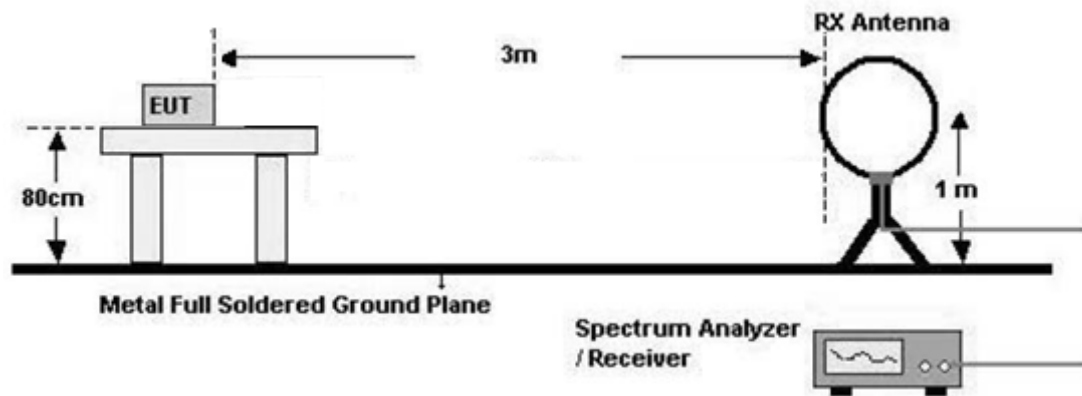

30 MHz - 1 GHz

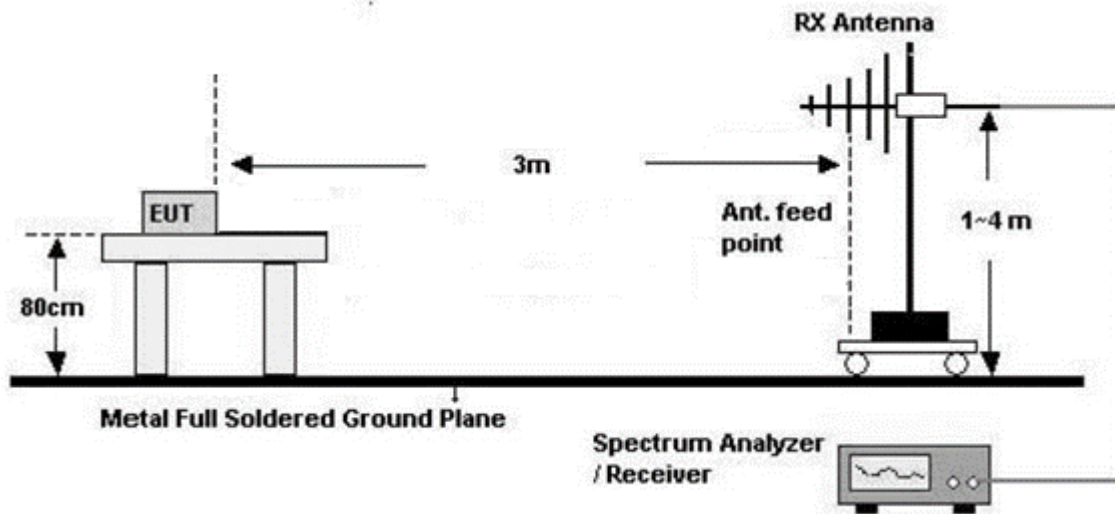

Above 1 GHz

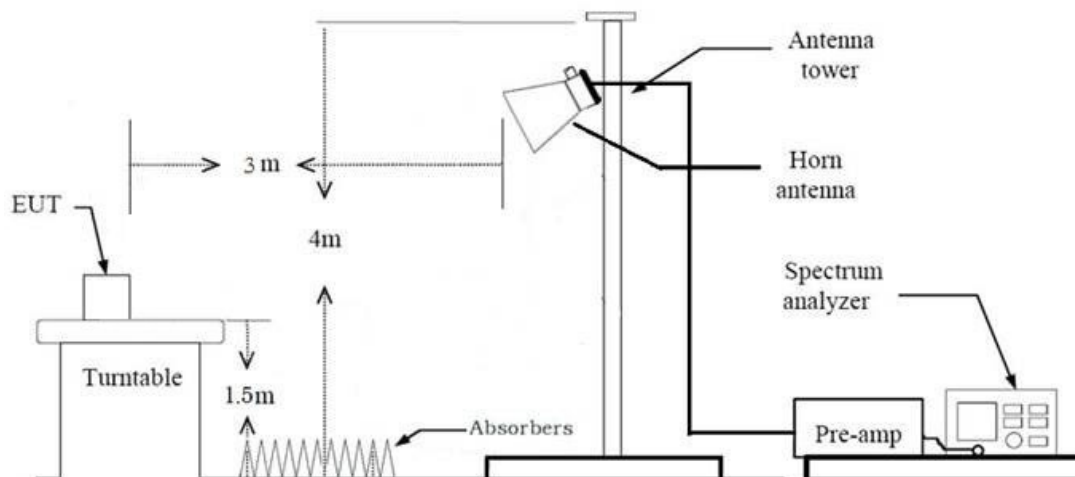

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average): Duty cycle $\geq 98 \%$,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already

beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total (Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98\%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak (Final Result) = Measured Value + Correction Factor

7.8. Test RU offset for Tones

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-

7.9. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS0)

2. Band Edge (Conducted)

: All Mode (Channel, Tones, RU Offset) of operation were investigated and the worst case configuration results are reported.

Tones	SRU/MRU	Channel	RU Index
26	SRU	1, 11, 12, 13	0, 8
52		1, 11, 12, 13	37, 40
106		1, 11, 12, 13	53, 54
242		1, 11, 12, 13	61
SU		1, 11, 12, 13	-

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories (Earphone, etc)

- Worst case : Stand alone

2. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.

- Radiated Spurious Emissions Worst case : Open mode

- Radiated Restricted Band Edge : Open mode

3. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS 0)

4. All Antenna of operation were investigated and the worst case results are reported

- Antenna Operation Type : SISO, MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)

- Worst case: MIMO_CDD(Ant.1+Ant.2)

5. EUT Axis

- Radiated Spurious Emissions : Y

- Radiated Restricted Band Edge : X

6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

[RSE Worst case]

BW (MHz)	Test	Tones (T)	Offset
20	RSE	26	4
		242	61

[Bandedge Worst case]

BW (MHz)	Test	Tones (T)	Offset	
			Lower	Upper
20	Band Edge	26	0	8
		52	37	40
		106	53	54
		242	61	61
		SU	-	-

Radiated test(Simultaneous transmission Scenario)

1. Please refer to the [DTS], [BT], [UNII ax] Test Report.

AC Power line Conducted Emissions

1. Please refer to the [DTS] Test Report.

8. SUMMARY OF TEST RESULTS & DATA REFERENCING

8.1. Test result

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS (Note1)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

Note:

1. Please refer to the [DTS] Test Report.
2. The decision rule applies 'simple acceptance'

8.2. Data Referencing

Equipment Class	Rule Part	Test item	Data Referencing	Comments
DTS (WLAN 2.4GHz)	15.247(a)(2)	6 dB Bandwidth	Y	Spot-check
	15.247(b)(3)	Conducted Maximum output power	Y	Spot-check
	15.247(e).	Power Spectral Density	Y	Spot-check
	15.247(d)	Band Edge (Out of Band Emissions)	Y	Spot-check
	15.207	AC Power line conducted Emissions	Y	Spot-check
	15.247(d) 15.205 15.209	Radiated Spurious Emissions	Y	Spot-check
	15.247(d) 15.205 15.209	Radiated Restricted Band Edge	Y	Spot-check

Spot-Check Result

1. Data was leveraged from model SM-F761U for the certification of SM-F761B.
2. Please refer to the [FCC Evaluation] Report.

9. TEST RESULT


9.1 DUTY CYCLE

Mode	Tone (T)	Worst Data rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	26	MCS0	4.580	4.606	0.995	0.024
	52	MCS0	4.565	4.590	0.994	0.024
	106	MCS0	2.490	2.515	0.990	0.044
	242	MCS0	1.122	1.147	0.978	0.095
802.11ax(SU)	BW 20	MCS0	5.447	5.467	0.996	0.016


Test Plots

Note: In order to simplify the report, attached plots were only the lowest data rate.


26 Tones (MCS 0)

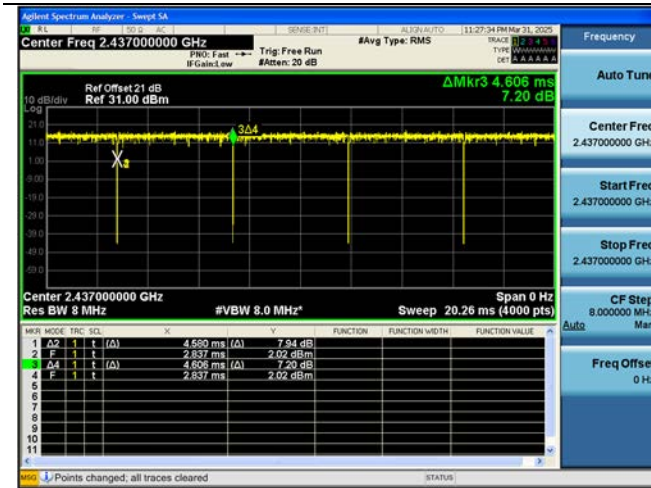


52 Tones (MCS 0)

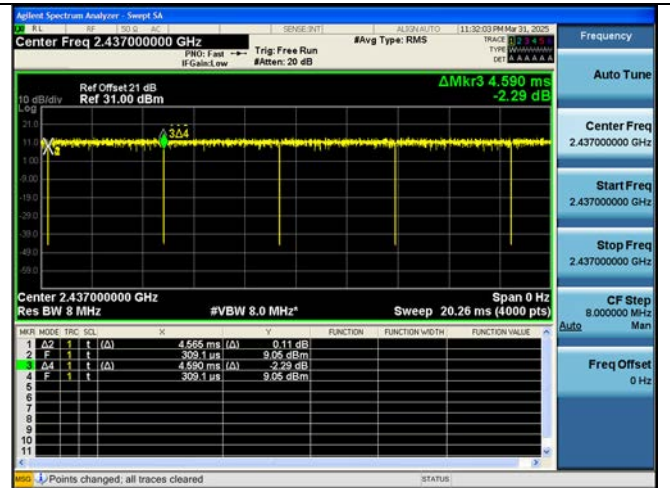


106 Tones (MCS 0)

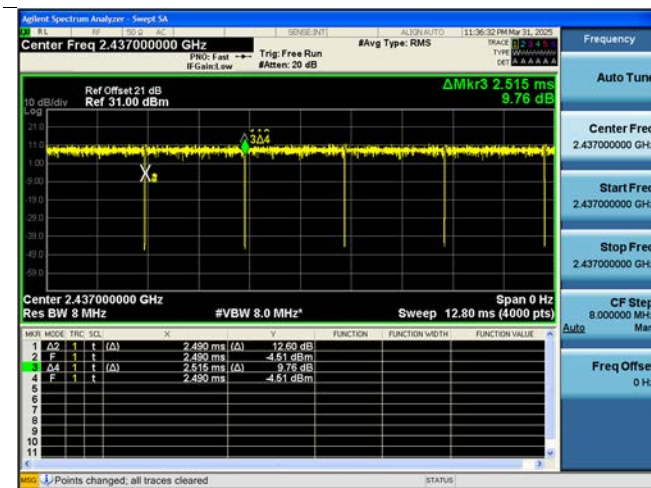

242 Tones (MCS 0)

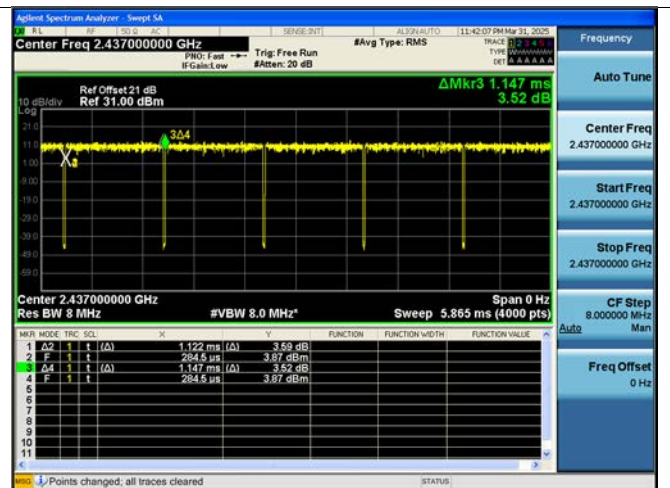

SU (MCS 0)

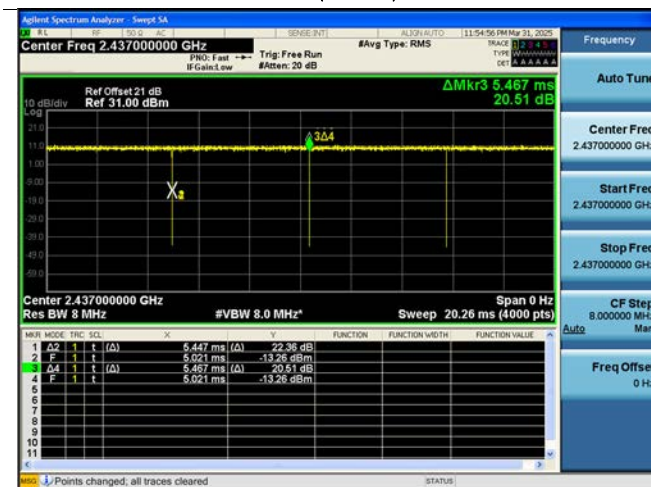

9.2 6 dB BANDWIDTH

Limit : > 500 kHz

[ANT.1]


Mode	Freq. [MHz]	CH.	6dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
HE20 26T	2412	1	2.091	2.706	2.058	18.322	17.133	18.086
	2437	6	2.090	2.695	2.102	18.142	17.183	18.203
	2462	11	2.105	2.693	2.104	18.086	16.847	18.266
	2467	12	2.107	2.701	15.82	18.152	17.277	18.445
	2472	13	2.091	2.708	2.088	18.031	17.205	18.370
HE20 52T	2412	1	17.07	15.07	4.527	18.242	17.184	17.940
	2437	6	15.86	15.10	5.763	18.190	17.138	18.111
	2462	11	10.84	15.07	17.03	18.091	17.078	18.215
	2467	12	4.562	8.857	17.08	18.130	17.232	18.273
	2472	13	4.561	15.09	17.01	17.967	17.259	18.080
HE20 106T	2412	1	18.19	-	17.17	18.252	-	18.025
	2437	6	18.10	-	17.16	18.224	-	18.218
	2462	11	17.19	-	17.38	18.135	-	18.238
	2467	12	17.18	-	17.45	18.140	-	18.306
	2472	13	17.17	-	17.38	18.113	-	18.283
HE20 242T	2412	1	-	18.97	-	-	18.963	-
	2437	6	-	19.09	-	-	18.981	-
	2462	11	-	19.06	-	-	18.956	-
	2467	12	-	19.04	-	-	18.993	-
	2472	13	-	19.02	-	-	18.978	-
HE20 SU	2412	1	-	19.01	-	-	18.973	-
	2437	6	-	19.14	-	-	19.015	-
	2462	11	-	19.08	-	-	18.991	-
	2467	12	-	19.06	-	-	19.021	-
	2472	13	-	19.02	-	-	19.001	-

[ANT.2]

Mode	Freq. [MHz]	CH.	6dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
HE20 26T	2412	1	2.122	2.703	2.116	18.183	17.150	18.380
	2437	6	2.063	2.712	2.116	18.167	17.067	18.070
	2462	11	2.091	2.675	2.071	18.053	17.077	18.254
	2467	12	2.104	2.699	2.099	17.984	17.200	18.433
	2472	13	2.104	2.698	2.100	18.061	17.166	18.373
HE20 52T	2412	1	17.07	13.86	17.04	18.033	17.104	18.137
	2437	6	17.09	15.10	5.751	18.188	17.100	18.084
	2462	11	4.537	15.09	17.00	18.121	17.068	18.249
	2467	12	5.817	15.09	17.05	18.121	17.249	18.288
	2472	13	4.550	11.33	17.06	18.119	17.187	18.289
HE20 106T	2412	1	18.13	-	17.40	18.175	-	18.257
	2437	6	18.17	-	17.17	18.210	-	18.181
	2462	11	17.19	-	17.42	18.042	-	18.285
	2467	12	17.19	-	17.42	18.124	-	18.285
	2472	13	17.15	-	17.43	18.148	-	18.297
HE20 242T	2412	1	-	19.11	-	-	18.997	-
	2437	6	-	19.09	-	-	18.966	-
	2462	11	-	19.07	-	-	18.972	-
	2467	12	-	19.07	-	-	18.989	-
	2472	13	-	19.03	-	-	18.983	-
HE20 SU	2412	1	-	19.09	-	-	18.997	-
	2437	6	-	19.08	-	-	18.984	-
	2462	11	-	19.08	-	-	18.997	-
	2467	12	-	19.08	-	-	19.021	-
	2472	13	-	19.03	-	-	19.008	-


Test Plots

Note: In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.

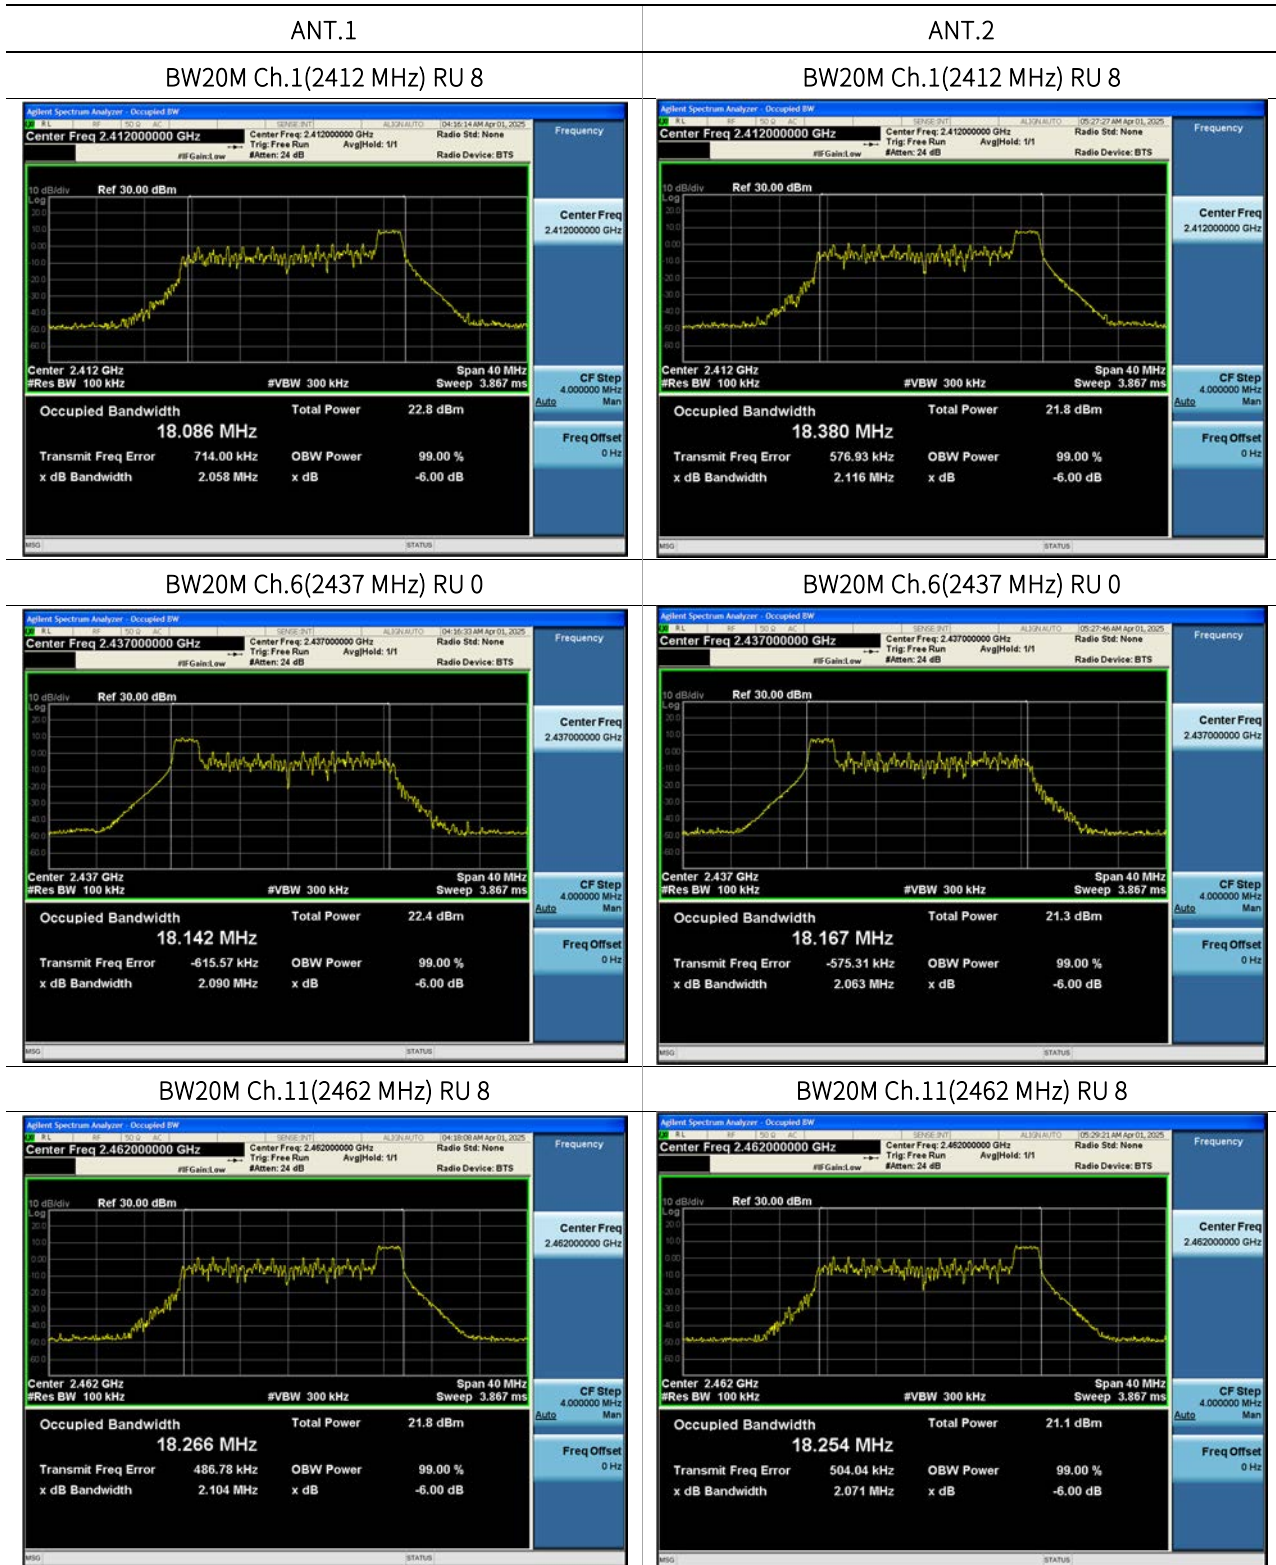


ANT.1

BW20M Ch.12(2467 MHz) RU 0

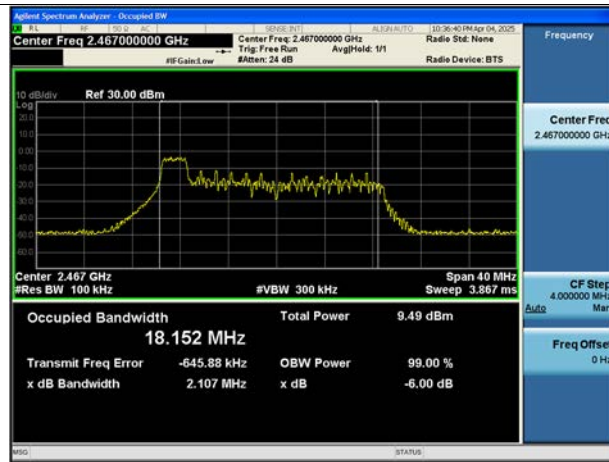


ANT.2


BW20M Ch.12(2467 MHz) RU 8

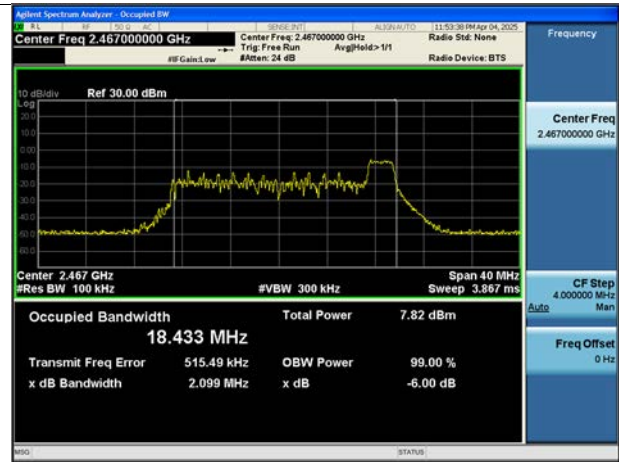

BW20M Ch.13(2472 MHz) RU 8

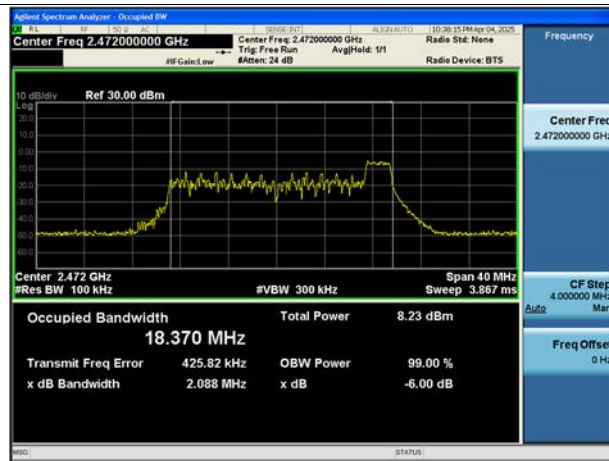

BW20M Ch.13(2472 MHz) RU 8

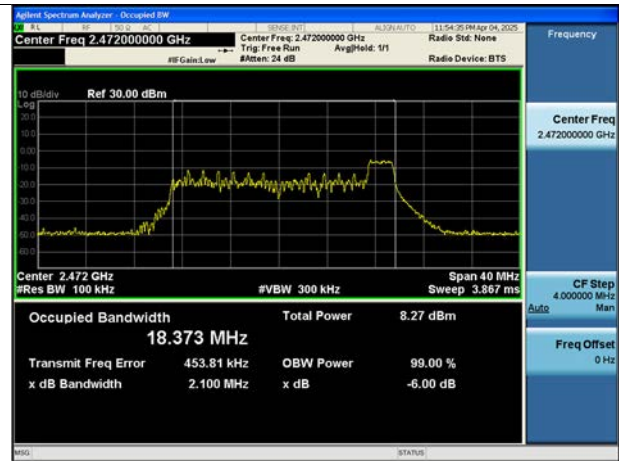

9.3 OUTPUT POWER

Note:

1. MIMO Peak Power = $10 \cdot \log((10^{\wedge}(\text{Ant.1 Peak power} / 10)) + (10^{\wedge}(\text{Ant.2 Peak power} / 10)))$

Peak Power

[MIMO_CDD(Ant.1+Ant.2)]

Mode	Freq. [MHz]	CH.	Total Peak Power [dBm]								
			RU Index : Low			RU Index : Mid			RU Index : High		
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO
HE20 26T	2412	1	21.79	22.10	24.96	22.51	21.88	25.21	23.19	21.88	25.59
	2437	6	23.03	21.67	25.41	22.69	21.88	25.31	22.91	22.17	25.56
	2462	11	22.86	22.15	25.53	22.79	21.79	25.33	22.24	21.56	24.92
	2467	12	10.09	9.23	12.69	9.15	8.71	11.94	8.74	8.20	11.49
	2472	13	10.34	9.69	13.04	9.20	8.98	12.10	8.53	8.45	11.50
HE20 52T	2412	1	23.12	23.25	26.20	23.22	23.06	26.15	24.31	23.21	26.81
	2437	6	23.96	22.97	26.50	23.56	23.04	26.32	24.10	23.36	26.75
	2462	11	23.81	23.02	26.44	23.84	22.95	26.43	23.28	22.35	25.85
	2467	12	9.89	9.14	12.54	9.48	8.81	12.17	8.83	8.24	11.56
	2472	13	10.15	9.61	12.90	9.33	9.25	12.30	8.77	8.55	11.67
HE20 106T	2412	1	24.49	24.32	27.42	-	-	-	25.01	24.12	27.60
	2437	6	24.89	24.15	27.55	-	-	-	24.88	24.08	27.51
	2462	11	24.73	23.86	27.33	-	-	-	24.19	23.33	26.79
	2467	12	9.68	8.91	12.33	-	-	-	8.65	8.15	11.41
	2472	13	9.65	9.19	12.44	-	-	-	8.75	8.38	11.58
HE20 242T	2412	1	-	-	-	23.25	22.84	26.06	-	-	-
	2437	6	-	-	-	24.63	23.87	27.27	-	-	-
	2462	11	-	-	-	24.38	23.40	26.93	-	-	-
	2467	12	-	-	-	8.04	7.50	10.79	-	-	-
	2472	13	-	-	-	8.04	7.68	10.88	-	-	-
HE20 SU	2412	1	-	-	-	23.15	22.79	25.99	-	-	-
	2437	6	-	-	-	24.65	23.81	27.26	-	-	-
	2462	11	-	-	-	24.40	23.39	26.94	-	-	-
	2467	12	-	-	-	8.12	7.70	10.92	-	-	-
	2472	13	-	-	-	8.03	7.75	10.90	-	-	-

Average Power

[MIMO_CDD(Ant.1+Ant.2)]

Note:

1. Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

Mode	Freq. [MHz]	CH.	Total Average Power [dBm]								
			RU Index : Low			RU Index : Mid			RU Index : High		
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO
HE20 26T	2412	1	11.65	12.29	14.99	12.25	11.68	14.98	13.68	12.08	15.96
	2437	6	13.10	11.64	15.44	12.55	11.82	15.21	13.30	12.38	15.87
	2462	11	13.17	12.66	15.93	12.89	11.68	15.34	12.11	11.41	14.79
	2467	12	0.55	-0.27	3.17	-1.18	-1.40	1.73	-1.21	-1.92	1.46
	2472	13	0.78	0.19	3.51	-0.79	-1.07	2.08	-1.67	-1.67	1.34
HE20 52T	2412	1	12.88	13.38	16.15	13.08	13.11	16.11	14.68	13.28	17.04
	2437	6	14.00	13.08	16.58	13.63	13.12	16.39	14.29	13.58	16.96
	2462	11	14.14	13.45	16.82	13.97	12.97	16.51	13.14	12.41	15.80
	2467	12	0.33	-0.44	2.97	-0.28	-0.91	2.43	-1.16	-1.86	1.51
	2472	13	0.53	0.08	3.32	-0.59	-0.50	2.46	-1.38	-1.61	1.51
HE20 106T	2412	1	14.02	14.34	17.19	-	-	-	15.36	14.22	17.84
	2437	6	14.89	14.05	17.50	-	-	-	15.18	14.36	17.80
	2462	11	14.95	14.19	17.60	-	-	-	14.31	13.46	16.92
	2467	12	0.11	-0.75	2.71	-	-	-	-1.26	-1.80	1.49
	2472	13	-0.07	-0.36	2.80	-	-	-	-1.11	-1.64	1.64
HE20 242T	2412	1	-	-	-	14.56	14.11	17.35	-	-	-
	2437	6	-	-	-	15.98	15.15	18.59	-	-	-
	2462	11	-	-	-	15.75	14.73	18.28	-	-	-
	2467	12	-	-	-	-0.71	-1.33	2.00	-	-	-
	2472	13	-	-	-	-0.71	-1.10	2.11	-	-	-
HE20 SU	2412	1	-	-	-	14.21	13.75	17.00	-	-	-
	2437	6	-	-	-	15.64	14.79	18.25	-	-	-
	2462	11	-	-	-	15.39	14.40	17.93	-	-	-
	2467	12	-	-	-	-0.84	-1.39	1.90	-	-	-
	2472	13	-	-	-	-0.88	-1.24	1.95	-	-	-

9.4 POWER SPECTRAL DENSITY

Note:

1. MIMO Total PSD = $10 \cdot \log(((10^{(\text{Ant.1 PSD}/10)}) + (10^{(\text{Ant.2 PSD}/10)}))$
2. Total PSD = Measured Value + Duty Cycle Factor

[MIMO_CDD(Ant.1+Ant.2)]

Mode	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									Limit [dBm/3 kHz]
			RU Index : Low			RU Index : Mid			RU Index : High			
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	
HE20 26T	2412	1	-5.316	-4.515	-1.887	-5.068	-5.181	-2.114	-3.358	-4.592	-0.921	8
	2437	6	-4.002	-5.554	-1.699	-4.511	-5.396	-1.921	-3.763	-4.293	-1.010	8
	2462	11	-3.862	-4.083	-0.961	-4.332	-5.718	-1.960	-5.093	-5.667	-2.360	8
	2467	12	-16.683	-17.343	-13.990	-18.302	-18.532	-15.405	-18.388	-19.039	-15.691	8
	2472	13	-16.224	-16.919	-13.547	-18.252	-18.010	-15.119	-18.770	-18.910	-15.829	8
HE20 52T	2412	1	-7.175	-6.537	-3.834	-6.822	-6.829	-3.815	-5.201	-6.659	-2.859	8
	2437	6	-5.684	-6.741	-3.170	-6.483	-6.751	-3.605	-5.458	-6.499	-2.937	8
	2462	11	-5.675	-6.513	-3.063	-5.950	-6.954	-3.413	-6.837	-7.271	-4.038	8
	2467	12	-19.496	-20.374	-16.903	-20.243	-21.026	-17.607	-21.303	-21.850	-18.558	8
	2472	13	-19.451	-19.672	-16.550	-20.284	-20.352	-17.308	-21.426	-21.741	-18.570	8
HE20 106T	2412	1	-8.656	-8.644	-5.639	-	-	-	-7.093	-7.967	-4.497	8
	2437	6	-7.713	-8.983	-5.291	-	-	-	-7.585	-8.390	-4.958	8
	2462	11	-7.763	-8.350	-5.036	-	-	-	-8.221	-9.009	-5.586	8
	2467	12	-22.806	-23.651	-20.197	-	-	-	-23.957	-24.460	-21.190	8
	2472	13	-22.317	-23.055	-19.660	-	-	-	-23.827	-24.162	-20.981	8
HE20 242T	2412	1	-	-	-	-10.264	-11.203	-7.697	-	-	-	8
	2437	6	-	-	-	-9.725	-10.616	-7.137	-	-	-	8
	2462	11	-	-	-	-9.979	-10.747	-7.335	-	-	-	8
	2467	12	-	-	-	-26.352	-27.314	-23.796	-	-	-	8
	2472	13	-	-	-	-25.552	-26.105	-22.809	-	-	-	8
HE20 SU	2412	1	-	-	-	-11.276	-12.487	-8.829	-	-	-	8
	2437	6	-	-	-	-10.776	-11.751	-8.226	-	-	-	8
	2462	11	-	-	-	-11.043	-11.550	-8.279	-	-	-	8
	2467	12	-	-	-	-26.884	-27.556	-24.197	-	-	-	8
	2472	13	-	-	-	-26.499	-26.996	-23.730	-	-	-	8


Test Plots

Note: In order to simplify the report, attached plots were only the worst case PSD channel.



ANT.1

ANT.2



BW20M Ch.1(2412 MHz) RU 8

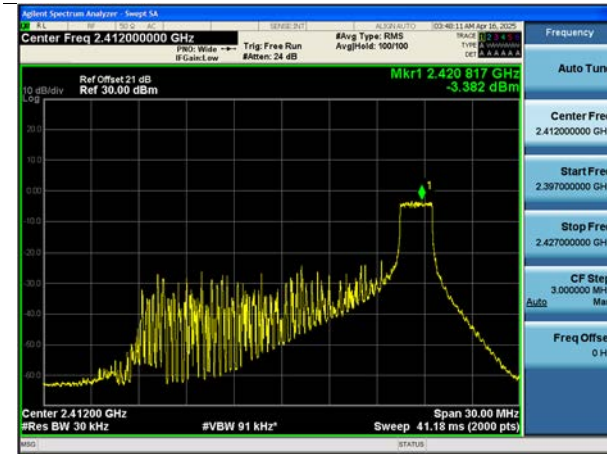

BW20M Ch.6(2437 MHz) RU 8

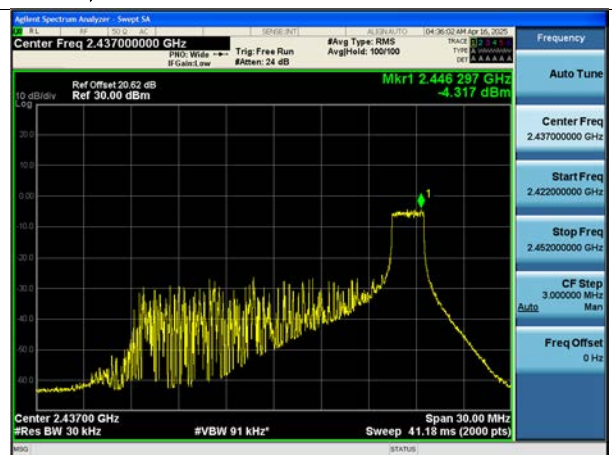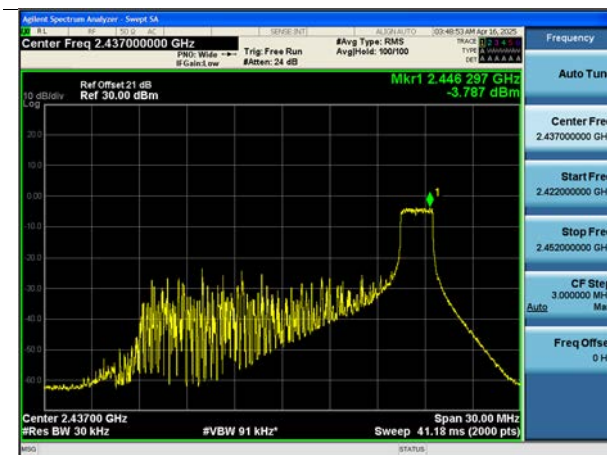



BW20M Ch.11(2462 MHz) RU 0

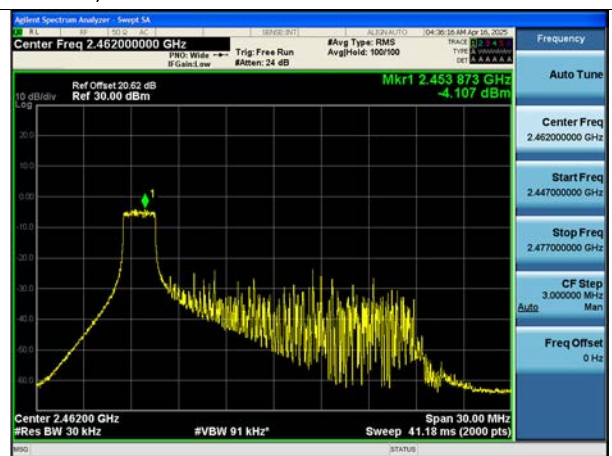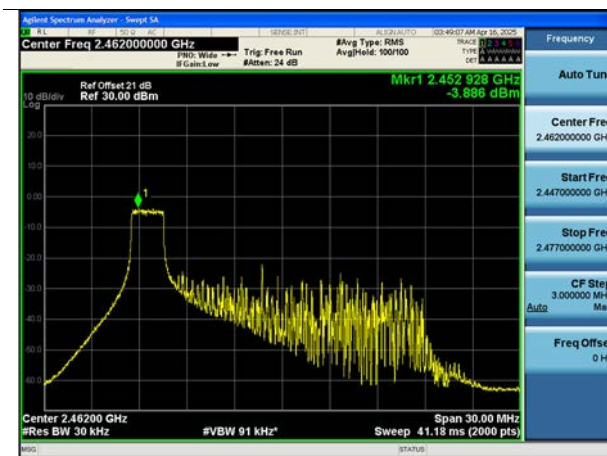



ANT.1

ANT.2

BW20M Ch.12(2467 MHz) RU 0

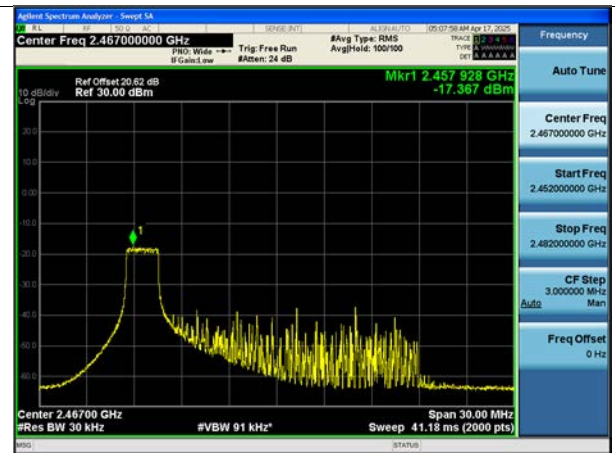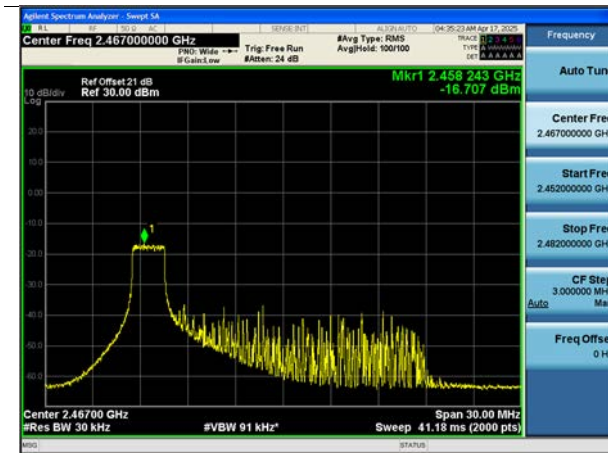

BW20M Ch.13(2472 MHz) RU 0

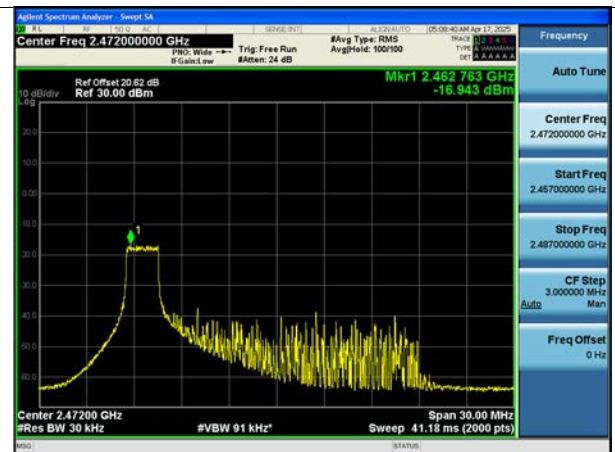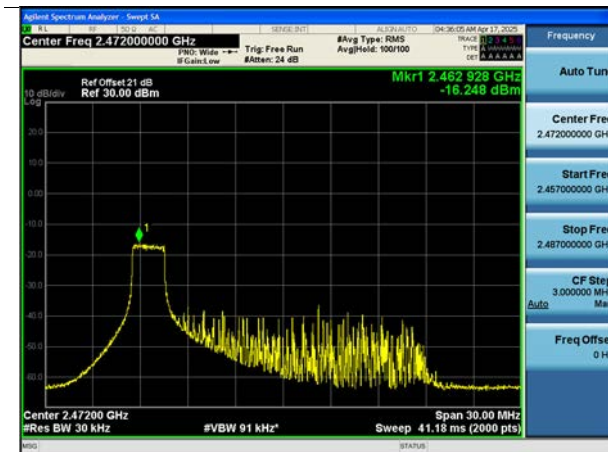

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

Band Edge

Limit : 30 dBc

[ANT.1]


Mode	Freq. [MHz]	CH.	RU Index	Measured Position	Band edge [dB]
HE20 26T	2412	1	Low	Lowest Bandedge	36.358
	2462	11	High	Highest Bandedge	53.929
	2467	12	High	Highest Bandedge	41.130
	2472	13	High	Highest Bandedge	31.566
HE20 52T	2412	1	Low	Lowest Bandedge	36.349
	2462	11	High	Highest Bandedge	51.908
	2467	12	High	Highest Bandedge	38.015
	2472	13	High	Highest Bandedge	32.387
HE20 106T	2412	1	Low	Lowest Bandedge	36.800
	2462	11	High	Highest Bandedge	50.137
	2467	12	High	Highest Bandedge	35.508
	2472	13	High	Highest Bandedge	32.379
HE20 242T	2412	1	Low	Lowest Bandedge	39.469
	2462	11	High	Highest Bandedge	48.471
	2467	12	High	Highest Bandedge	35.051
	2472	13	High	Highest Bandedge	33.196
HE20 SU	2412	1	Low	Lowest Bandedge	35.234
	2462	11	High	Highest Bandedge	48.923
	2467	12	High	Highest Bandedge	34.600
	2472	13	High	Highest Bandedge	32.038

[ANT.2]

Mode	Freq. [MHz]	CH.	RU Index	Measured Position	Band edge [dB]
HE20 26T	2412	1	Low	Lowest Bandedge	35.486
	2462	11	High	Highest Bandedge	54.081
	2467	12	High	Highest Bandedge	39.939
	2472	13	High	Highest Bandedge	31.728
HE20 52T	2412	1	Low	Lowest Bandedge	35.479
	2462	11	High	Highest Bandedge	52.712
	2467	12	High	Highest Bandedge	38.235
	2472	13	High	Highest Bandedge	32.201
HE20 106T	2412	1	Low	Lowest Bandedge	35.338
	2462	11	High	Highest Bandedge	50.666
	2467	12	High	Highest Bandedge	35.231
	2472	13	High	Highest Bandedge	32.189
HE20 242T	2412	1	Low	Lowest Bandedge	37.417
	2462	11	High	Highest Bandedge	47.832
	2467	12	High	Highest Bandedge	34.055
	2472	13	High	Highest Bandedge	32.411
HE20 SU	2412	1	Low	Lowest Bandedge	32.600
	2462	11	High	Highest Bandedge	48.494
	2467	12	High	Highest Bandedge	33.675
	2472	13	High	Highest Bandedge	31.358


Test Plots

Note: In order to simplify the report, attached plots were only the worst case.

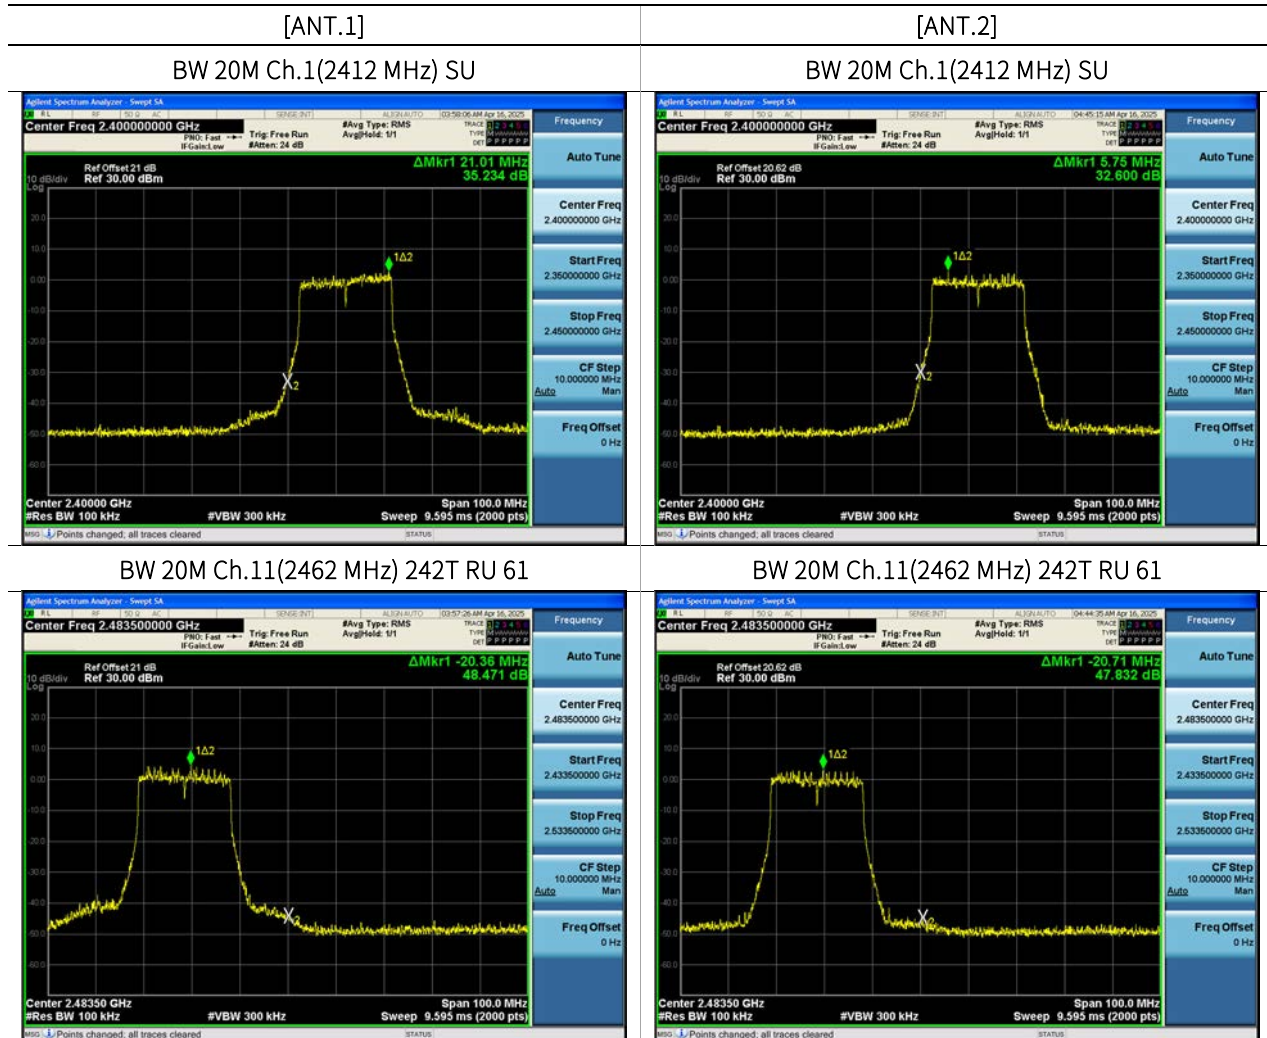


[ANT.1]

BW 20M Ch.12(2467 MHz) SU

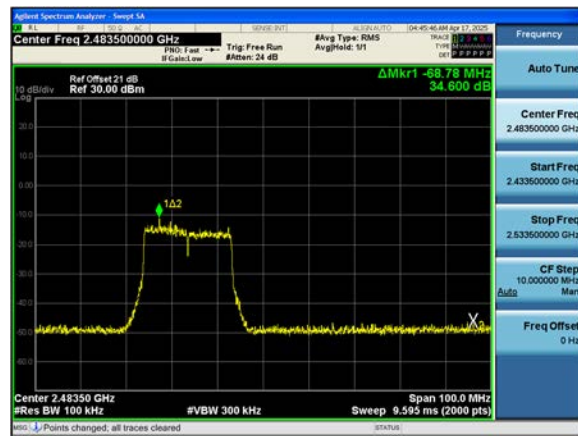


[ANT.2]


BW 20M Ch.12(2467 MHz) SU

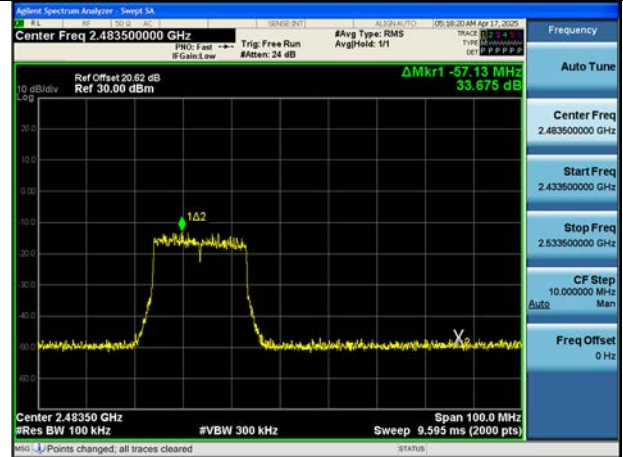

BW 20M Ch.13(2472 MHz) 26T RU 8

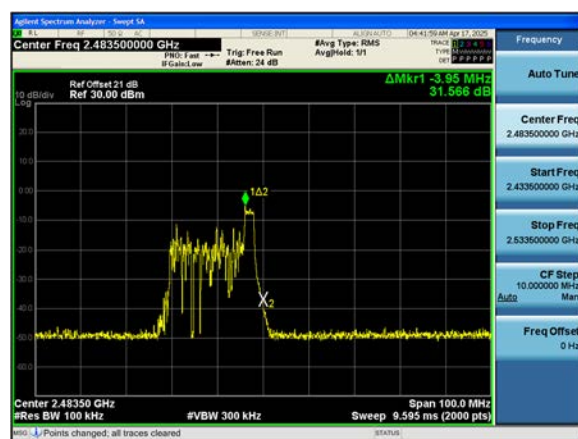

BW 20M Ch.13(2472 MHz) SU

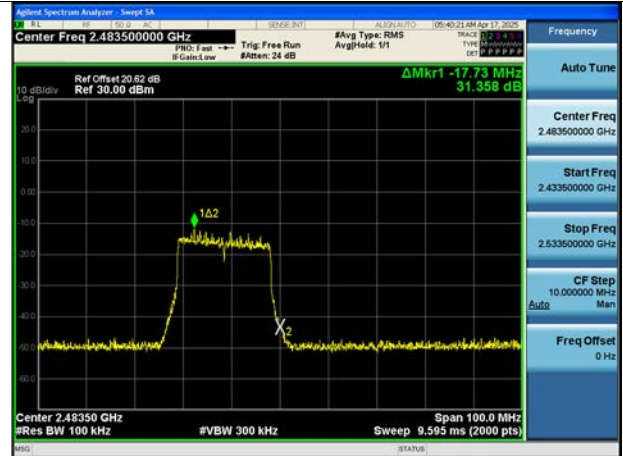

Conducted Spurious Emissions

Limit : 30 dBc

[ANT.1]

Mode	Freq. [MHz]	CH.	Conducted Spurious Emissions [dB]		
			RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1
HE20 26T	2412	1	51.525	52.194	55.185
	2437	6	54.218	53.630	53.819
	2462	11	53.424	53.398	52.995
	2467	12	45.428	43.605	44.442
	2472	13	44.541	42.591	43.141
HE20 52T	2412	1	50.755	50.091	52.806
	2437	6	51.523	52.774	51.304
	2462	11	53.180	51.453	51.490
	2467	12	42.935	40.716	40.448
	2472	13	43.400	42.702	39.859
HE20 106T	2412	1	49.077	-	51.132
	2437	6	50.474	-	51.277
	2462	11	49.798	-	48.823
	2467	12	39.554	-	36.730
	2472	13	38.984	-	38.075
HE20 242T	2412	1	-	46.921	-
	2437	6	-	50.454	-
	2462	11	-	48.955	-
	2467	12	-	36.784	-
	2472	13	-	36.185	-
HE20 SU	2412	1	-	49.673	-
	2437	6	-	48.704	-
	2462	11	-	49.374	-
	2467	12	-	38.291	-
	2472	13	-	38.161	-

[ANT.2]


Mode	Freq. [MHz]	CH.	Conducted Spurious Emissions [dB]		
			RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2
HE20 26T	2412	1	53.830	51.720	53.455
	2437	6	51.597	51.580	53.831
	2462	11	52.227	54.029	52.998
	2467	12	43.036	43.522	42.363
	2472	13	44.999	43.105	42.981
HE20 52T	2412	1	51.682	50.231	51.897
	2437	6	50.688	51.482	52.609
	2462	11	51.447	51.165	50.156
	2467	12	42.768	41.005	39.421
	2472	13	42.982	42.219	41.198
HE20 106T	2412	1	50.363	-	50.092
	2437	6	49.790	-	49.607
	2462	11	51.263	-	49.167
	2467	12	40.148	-	38.284
	2472	13	38.694	-	39.054
HE20 242T	2412	1	-	48.741	-
	2437	6	-	48.477	-
	2462	11	-	50.065	-
	2467	12	-	37.875	-
	2472	13	-	36.101	-
HE20 SU	2412	1	-	46.195	-
	2437	6	-	48.867	-
	2462	11	-	49.913	-
	2467	12	-	35.137	-
	2472	13	-	36.671	-

Test Plots


Note:

In order to simplify the report, attached plots were only the worst case.

[ANT.1] BW 20M Ch.13(2 472 MHz) 242T RU 61

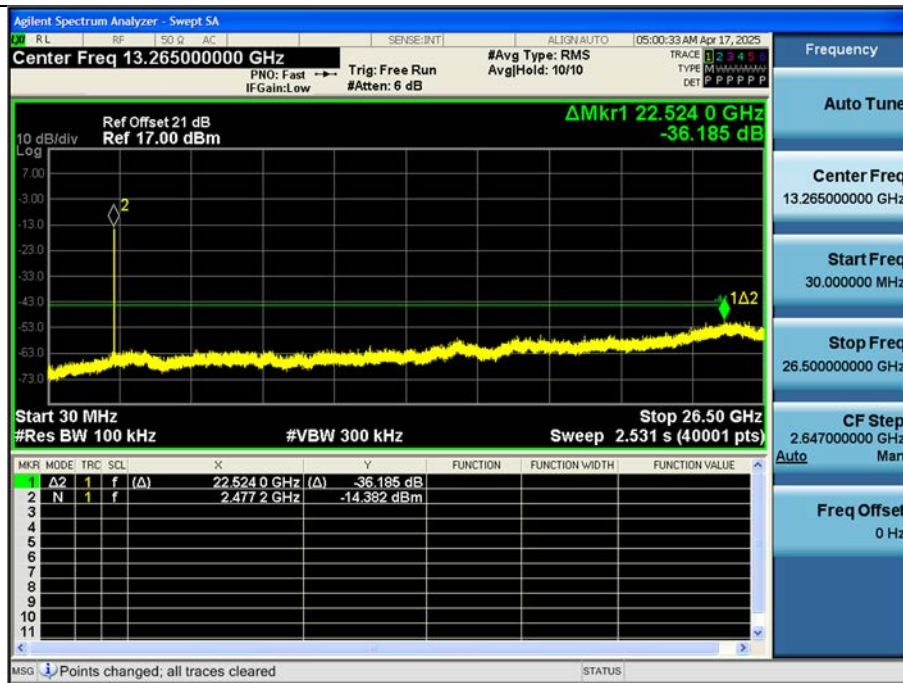

[ANT.2] BW 20M Ch.12(2 467 MHz) SU

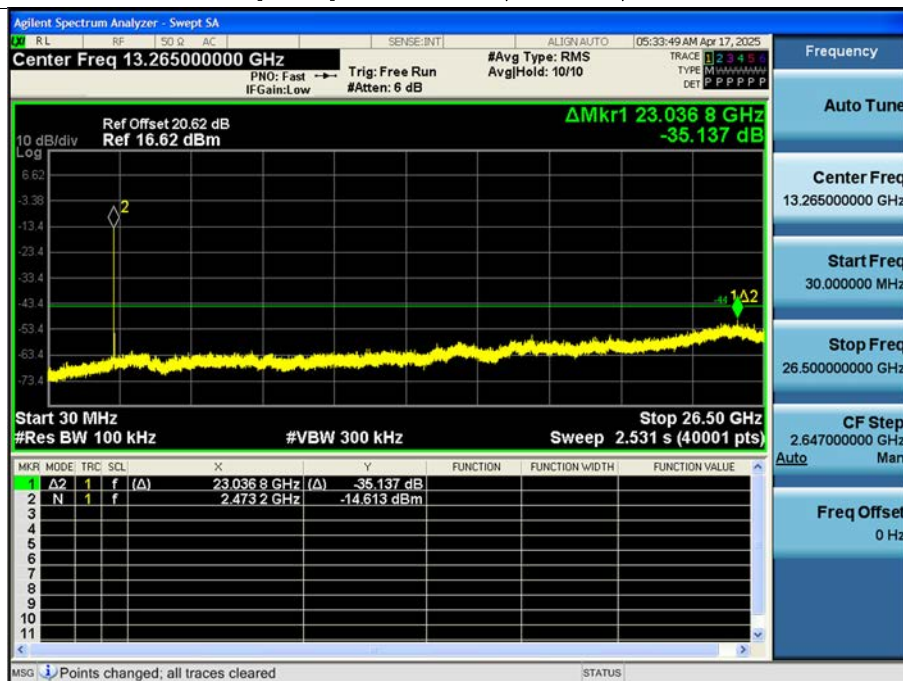

Limit

ANT.1 : -44.382 dBm, ANT.2 : -44.613 dBm

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dB μ V/m]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB μ V/m]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

[MIMO_CDD(Ant.1+Ant.2)]

Band : DTS			Operation Mode :		802.11ax_HE20 MCS0 242T RU61			
CH.1 2412 MHz			Transfer Rate :		MCS0			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	41.79	0.00	4.99	V	46.78	73.98	27.20	PK
4824	29.59	0.10	4.99	V	34.68	53.98	19.30	AV
7236	38.54	0.00	12.93	V	51.47	73.98	22.51	PK
7236	26.43	0.10	12.93	V	39.46	53.98	14.52	AV
4824	41.95	0.00	4.99	H	46.94	73.98	27.04	PK
4824	29.75	0.10	4.99	H	34.84	53.98	19.14	AV
7236	38.92	0.00	12.93	H	51.85	73.98	22.13	PK
7236	26.51	0.10	12.93	H	39.54	53.98	14.44	AV

Band : DTS			Operation Mode :		802.11ax_HE20 MCS0 242T RU61			
CH.6 2437 MHz			Transfer Rate :		MCS0			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	41.96	0.00	5.25	V	47.21	73.98	26.77	PK
4874	29.44	0.10	5.25	V	34.79	53.98	19.19	AV
7311	38.57	0.00	12.82	V	51.39	73.98	22.59	PK
7311	26.48	0.10	12.82	V	39.40	53.98	14.58	AV
4874	42.17	0.00	5.25	H	47.42	73.98	26.56	PK
4874	29.71	0.10	5.25	H	35.06	53.98	18.92	AV
7311	38.85	0.00	12.82	H	51.67	73.98	22.31	PK
7311	26.51	0.10	12.82	H	39.43	53.98	14.55	AV

Band : DTS			Operation Mode :		802.11ax_HE20 MCS0 242T RU61			
CH.11 2462 MHz			Transfer Rate :		MCS0			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	41.98	0.00	5.45	V	47.43	73.98	26.55	PK
4924	29.77	0.10	5.45	V	35.32	53.98	18.66	AV
7386	39.03	0.00	12.63	V	51.66	73.98	22.32	PK
7386	26.67	0.10	12.63	V	39.40	53.98	14.58	AV
4924	41.94	0.00	5.45	H	47.39	73.98	26.59	PK
4924	29.70	0.10	5.45	H	35.25	53.98	18.73	AV
7386	38.88	0.00	12.63	H	51.51	73.98	22.47	PK
7386	26.68	0.10	12.63	H	39.41	53.98	14.57	AV

Band : DTS			Operation Mode :		802.11ax_HE20 MCS0 26T RU4			
CH.1 2412 MHz			Transfer Rate :		MCS0			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	42.00	0.00	4.99	V	46.99	73.98	26.99	PK
4824	29.63	0.02	4.99	V	34.64	53.98	19.34	AV
7236	38.64	0.00	12.93	V	51.57	73.98	22.41	PK
7236	26.55	0.02	12.93	V	39.50	53.98	14.48	AV
4824	41.81	0.00	4.99	H	46.80	73.98	27.18	PK
4824	29.93	0.02	4.99	H	34.94	53.98	19.04	AV
7236	39.02	0.00	12.93	H	51.95	73.98	22.03	PK
7236	26.60	0.02	12.93	H	39.55	53.98	14.43	AV

Band : DTS			Operation Mode :		802.11ax_HE20 MCS0 26T RU4			
CH.6 2437 MHz			Transfer Rate :		MCS0			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	41.81	0.00	5.25	V	47.06	73.98	26.92	PK
4874	29.58	0.02	5.25	V	34.85	53.98	19.13	AV
7311	38.67	0.00	12.82	V	51.49	73.98	22.49	PK
7311	26.46	0.02	12.82	V	39.30	53.98	14.68	AV
4874	42.17	0.00	5.25	H	47.42	73.98	26.56	PK
4874	29.88	0.02	5.25	H	35.15	53.98	18.83	AV
7311	38.50	0.00	12.82	H	51.32	73.98	22.66	PK
7311	26.48	0.02	12.82	H	39.32	53.98	14.66	AV

Band : DTS			Operation Mode :		802.11ax_HE20 MCS0 26T RU4			
CH.11 2462 MHz			Transfer Rate :		MCS0			
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	41.94	0.00	5.45	V	47.39	73.98	26.59	PK
4924	29.73	0.02	5.45	V	35.20	53.98	18.78	AV
7386	38.68	0.00	12.63	V	51.31	73.98	22.67	PK
7386	26.75	0.02	12.63	V	39.40	53.98	14.58	AV
4924	42.39	0.00	5.45	H	47.84	73.98	26.14	PK
4924	29.81	0.02	5.45	H	35.28	53.98	18.70	AV
7386	39.84	0.00	12.63	H	52.47	73.98	21.51	PK
7386	26.68	0.02	12.63	H	39.33	53.98	14.65	AV

Note:


Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11

Test Plots


[MIMO_CDD(Ant.1+Ant.2)]

Note: In order to simplify, Plots of worst case are only reported.

Radiated Spurious Emissions plot – Average result (802.11ax(HE20) 26 Tone RU 4, Ch.1 3rd Harmonic, Y-H)

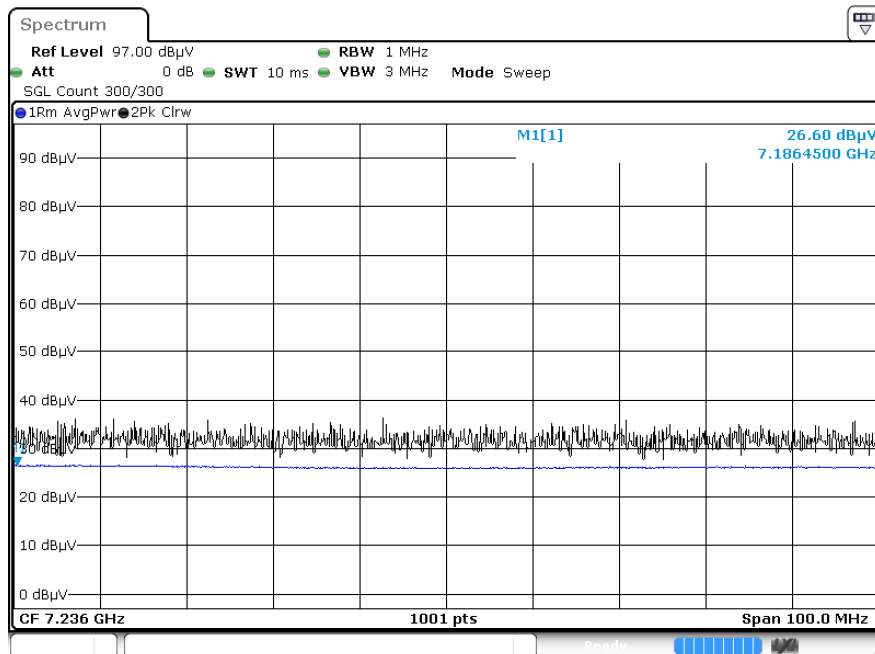

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20) 26Tone RU4, Ch.1 3rd Harmonic, Z-H)

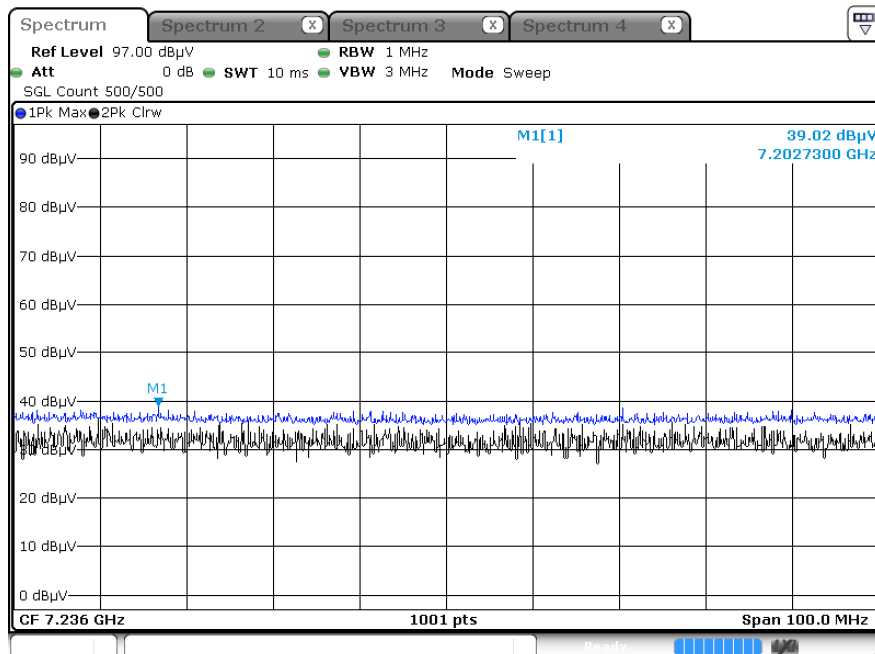

9.7 RADIATED RESTRICTED BAND EDGES

Note : # integration method Used (ANSI C63.10 Section11.13.3)

[MIMO_CDD(Ant.1+Ant.2)]

9.7.1 Channel 1, 11

802.11ax(MCS0)			HE20	242T				
Channel	CH 1		Freq	2412 MHz		RU offset	61	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2390	24.23	0.00	36.66	H	60.89	73.98	13.09	PK
# 2390	14.30	0.10	36.66	H	51.06	53.98	2.92	AV

802.11ax(MCS0)			HE20	242T				
Channel	CH 11		Freq	2462 MHz		RU offset	61	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2483.5	22.53	0.00	37.22	H	59.75	73.98	14.23	PK
# 2483.5	12.52	0.10	37.22	H	49.84	53.98	4.14	AV

802.11ax(MCS0)			HE20	26T				
Channel	CH 1		Freq	2412 MHz		RU offset	0	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	18.32	0.00	36.66	H	54.98	73.98	19.00	PK
2390.0	5.48	0.02	36.66	H	42.16	53.98	11.82	AV

802.11ax(MCS0)			HE20	26T				
Channel	CH 11		Freq	2462 MHz		RU offset	8	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	17.90	0.00	37.22	H	55.12	73.98	18.86	PK
2483.5	6.00	0.02	37.22	H	43.24	53.98	10.74	AV

802.11ax(MCS0)			HE20	52T				
Channel	CH 1		Freq	2412 MHz		RU offset	37	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	19.33	0.00	36.66	H	55.99	73.98	17.99	PK
2390.0	5.76	0.02	36.66	H	42.44	53.98	11.54	AV

802.11ax(MCS0)			HE20	52T				
Channel	CH 11		Freq	2462 MHz		RU offset	40	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	18.40	0.00	37.22	H	55.62	73.98	18.36	PK
2483.5	6.11	0.02	37.22	H	43.35	53.98	10.63	AV

802.11ax(MCS0)			HE20	106T				
Channel	CH 1		Freq	2412 MHz		RU offset	53	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	22.53	0.00	36.66	H	59.19	73.98	14.79	PK
2390.0	6.23	0.04	36.66	H	42.93	53.98	11.05	AV

802.11ax(MCS0)			HE20	106T				
Channel	CH 11		Freq	2462 MHz		RU offset	54	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	19.17	0.00	37.22	H	56.39	73.98	17.59	PK
2483.5	6.40	0.04	37.22	H	43.66	53.98	10.32	AV

802.11ax(MCS0)			HE20			SU		
Channel	CH 1		Freq	2412 MHz				
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2390	25.61	0.00	36.66	H	62.27	73.98	11.71	PK
# 2390	14.48	0.02	36.66	H	51.16	53.98	2.82	AV

802.11ax(MCS0)			HE20			SU		
Channel	CH 11		Freq	2462 MHz				
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	26.11	0.00	37.22	H	63.33	73.98	10.65	PK
2483.5	11.33	0.02	37.22	H	48.57	53.98	5.41	AV

9.7.2 Channel 12, 13

802.11ax(MCS0)			HE20	242T				
Channel	CH 12		Freq	2467 MHz		RU offset	61	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	17.55	0.00	36.66	H	54.21	73.98	19.77	PK
2390.0	5.55	0.10	36.66	H	42.31	53.98	11.67	AV

802.11ax(MCS0)			HE20	242T				
Channel	CH 13		Freq	2472 MHz		RU offset	61	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5	32.02	0.00	37.22	H	69.24	73.98	4.74	PK
2483.5	10.57	0.10	37.22	H	47.89	53.98	6.09	AV

802.11ax(MCS0)			HE20	26T				
Channel	CH 12		Freq	2467 MHz		RU offset	0	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	17.82	0.00	36.66	H	54.48	73.98	19.50	PK
2390.0	5.53	0.02	36.66	H	42.21	53.98	11.77	AV

802.11ax(MCS0)			HE20	26T				
Channel	CH 13		Freq	2472 MHz		RU offset	8	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2483.5	25.89	0.00	37.22	H	63.11	73.98	10.87	PK
# 2483.5	12.72	0.02	37.22	H	49.96	53.98	4.02	AV

802.11ax(MCS0)			HE20	52T				
Channel	CH 12		Freq	2467 MHz		RU offset	37	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	17.49	0.00	36.66	H	54.15	73.98	19.83	PK
2390.0	5.62	0.02	36.66	H	42.30	53.98	11.68	AV

802.11ax(MCS0)			HE20	52T				
Channel	CH 13		Freq	2472 MHz		RU offset	40	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2483.5	23.62	0.00	37.22	H	60.84	73.98	13.14	PK
# 2483.5	11.02	0.02	37.22	H	48.26	53.98	5.72	AV

802.11ax(MCS0)			HE20	106T				
Channel	CH 12		Freq	2467 MHz		RU offset	53	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	17.62	0.00	36.66	H	54.28	73.98	19.70	PK
2390.0	5.54	0.04	36.66	H	42.24	53.98	11.74	AV

802.11ax(MCS0)			HE20	106T				
Channel	CH 13		Freq	2472 MHz		RU offset	54	
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2483.5	21.79	0.00	37.22	H	59.01	73.98	14.97	PK
# 2483.5	9.47	0.04	37.22	H	46.73	53.98	7.25	AV

802.11ax(MCS0)			HE20			SU		
Channel	CH 12		Freq	2467 MHz				
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	17.60	0.00	36.66	H	54.26	73.98	19.72	PK
2390.0	5.62	0.02	36.66	H	42.30	53.98	11.68	AV


802.11ax(MCS0)			HE20			SU		
Channel	CH 13		Freq	2472 MHz				
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2483.5	21.11	0.00	37.22	H	58.33	73.98	15.65	PK
# 2483.5	10.06	0.02	37.22	H	47.30	53.98	6.68	AV

Test Plots


[MIMO_CDD(Ant.1+Ant.2)]

Note: In order to simplify the report, Plots of worst case are only reported.

Integration method Used_ Average result(802.11ax(HE20) SU, MCS0, SU ch.1, X-H)

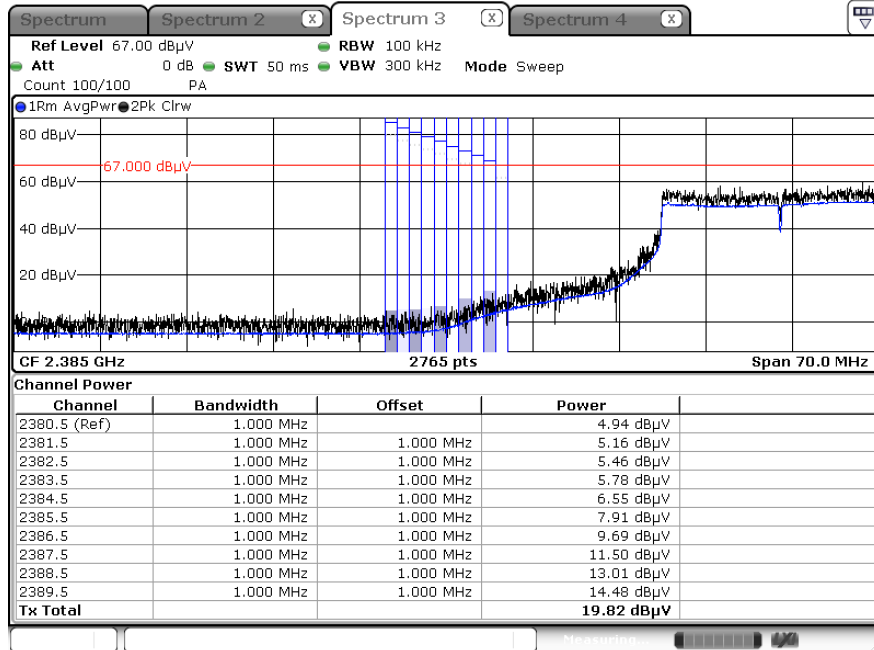

Integration method Used_ Peak result(802.11ax(HE20) SU, MCS0, SU ch.1, X-H)

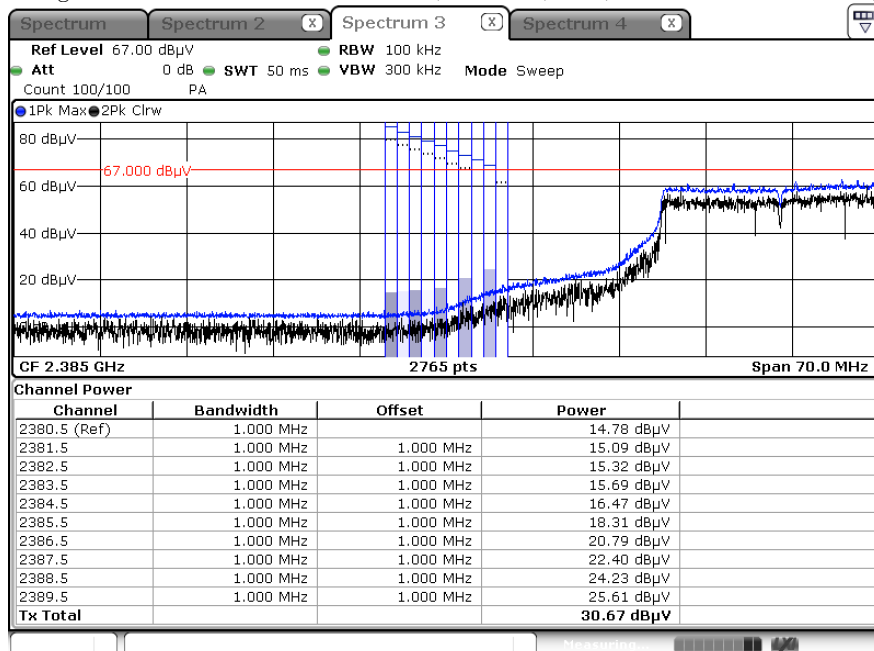

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	07/17/2025	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	08/27/2025	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/11/2026	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	02/18/2026	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	100935	08/01/2025	Annual
Power Meter	N1911A	Agilent	MY45100523	02/21/2026	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/04/2026	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/21/2025	Annual
Power Splitter	11667B	Hewlett Packard	10545	01/23/2026	Annual
DC Power Supply	E3632A	Agilent	KR75303243	04/16/2026	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/05/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/18/2026	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100752	12/27/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S1AM	07/30/2025	Annual
Turn Table	DS2000-S-1t	Innco system	DS2000/572/54610422/P	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-175	01/06/2027	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/28/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/03/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/16/2026	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/09/2025	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	12/26/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/04/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/04/2025	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	02/21/2026	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/12/2026	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S1L1	12/23/2025	Annual
RF Switching System	FMSR-05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S1L2	12/23/2025	Annual
RF Switching System	FMSR-05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S1L3	12/23/2025	Annual
RF Switching System	FMSR-05B (LNA1(1~18GHz))	T&M system	S1L4	12/23/2025	Annual
RF Switching System	FMSR-05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S1L5	12/23/2025	Annual
RF Switching System	FMSR-05B (Thru(30MHz ~ 18GHz))	T&M system	S1L6	12/23/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2505-FC019-P