

TEST REPORT

FCC LTE B71 Test for SM-F766U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2504-FC016-R1

DATE OF ISSUE
May 23, 2025

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2504-FC016-R1

DATE OF ISSUE

May 23, 2025

Additional Model

SM-F766U1

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-F766U

Date of Test

February 24, 2025 ~ April 21, 2025

FCC ID

A3LSMF766U

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 22, 2025	Initial Release
1	May 23, 2025	Revised the Power Supply Voltage. (DC 3.88 V → DC 3.90 V)

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	6
1.1 MAXIMUM OUTPUT POWER	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT.....	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS.....	11
3.4 OCCUPIED BANDWIDTH.....	12
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	13
3.6 BAND EDGE	14
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.8 PEAK- TO- AVERAGE RATIO	17
3.9 WORST CASE(RADIATED TEST)	19
3.10 WORST CASE(CONDUCTED TEST).....	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA(Main 1 ANT).....	26
8.1 EFFECTIVE RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS.....	28
8.3 PEAK-TO-AVERAGE RATIO	29
8.4 OCCUPIED BANDWIDTH.....	30
8.5 CONDUCTED SPURIOUS EMISSIONS	31
8.6 BAND EDGE	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST DATA(Sub 1 ANT)	44
9.1 EFFECTIVE RADIATED POWER.....	44
9.2 RADIATED SPURIOUS EMISSIONS.....	46
9.3 PEAK-TO-AVERAGE RATIO	47
9.4 OCCUPIED BANDWIDTH.....	48
9.5 CONDUCTED SPURIOUS EMISSIONS	49
9.6 BAND EDGE	49
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	50

10. TEST PLOTS(Main 1 ANT).....	62
11. TEST PLOTS(Sub 1 ANT)	131
12. ANNEX A_ TEST SETUP PHOTO	200

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMF766U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 27
EUT Type:	Mobile Phone
Model(s):	SM-F766U
Additional Model(s)	SM-F766U1
Tx Frequency:	665.5 MHz – 695.5 MHz (LTE – Band 71 (5 MHz)) 668.0 MHz – 693.0 MHz (LTE – Band 71 (10 MHz)) 670.5 MHz – 690.5 MHz (LTE – Band 71 (15 MHz)) 673.0 MHz – 688.0 MHz (LTE – Band 71 (20 MHz))
Date(s) of Tests:	February 24, 2025 ~ April 21, 2025
Serial number:	Radiated : R3CY209A7NT(Main 1 ANT), R3CY207MAGN(Sub 1 ANT) Conducted : R3CY209A7CH(Main 1 ANT), R3CY209A7FF(Sub 1 ANT)
Antenna Information	Please refer to the Antenna Specification document.

1.1 MAXIMUM OUTPUT POWER

Main 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band71 (5)	665.5 - 695.5	4M53G7D	QPSK	0.108	20.34
		4M51W7D	16-QAM	0.092	19.64
		4M53W7D	64-QAM	0.069	18.41
		4M56W7D	256-QAM	0.034	15.36
LTE – Band71 (10)	668.0 - 693.0	8M99G7D	QPSK	0.111	20.44
		8M99W7D	16-QAM	0.093	19.70
		9M00W7D	64-QAM	0.069	18.39
		9M00W7D	256-QAM	0.036	15.52
LTE – Band71 (15)	670.5 - 690.5	13M5G7D	QPSK	0.115	20.61
		13M5W7D	16-QAM	0.097	19.86
		13M5W7D	64-QAM	0.074	18.69
		13M4W7D	256-QAM	0.037	15.74
LTE – Band71 (20)	673.0 - 688.0	17M9G7D	QPSK	0.130	21.15
		17M9W7D	16-QAM	0.109	20.37
		17M9W7D	64-QAM	0.084	19.23
		17M9W7D	256-QAM	0.042	16.23

Sub 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band71 (5)	665.5 - 695.5	4M53G7D	QPSK	0.066	18.18
		4M51W7D	16QAM	0.055	17.37
		4M53W7D	64QAM	0.042	16.24
		4M55W7D	256QAM	0.022	13.33
LTE – Band71 (10)	668.0 - 693.0	9M02G7D	QPSK	0.065	18.13
		9M01W7D	16QAM	0.055	17.37
		8M99W7D	64QAM	0.042	16.27
		9M00W7D	256QAM	0.021	13.31
LTE – Band71 (15)	670.5 - 690.5	13M5G7D	QPSK	0.068	18.33
		13M5W7D	16QAM	0.057	17.55
		13M5W7D	64QAM	0.044	16.43
		13M5W7D	256QAM	0.022	13.45
LTE – Band71 (20)	673.0 - 688.0	18M0G7D	QPSK	0.067	18.26
		17M9W7D	16QAM	0.056	17.52
		17M9W7D	64QAM	0.044	16.42
		17M8W7D	256QAM	0.022	13.39

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

Please refer to the [2G3G] Test Report.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq$ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{\text{g}}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_{g} is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

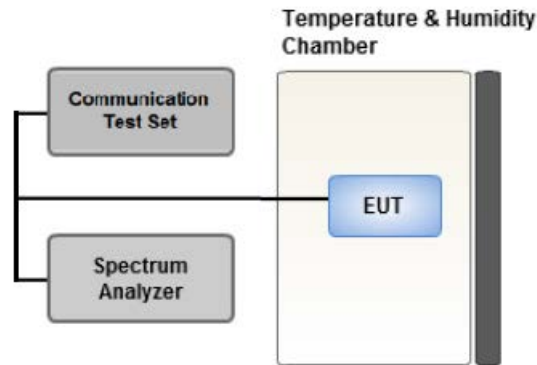

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

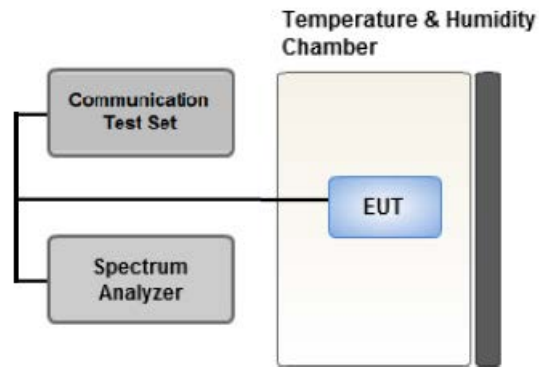

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.6 BAND EDGE

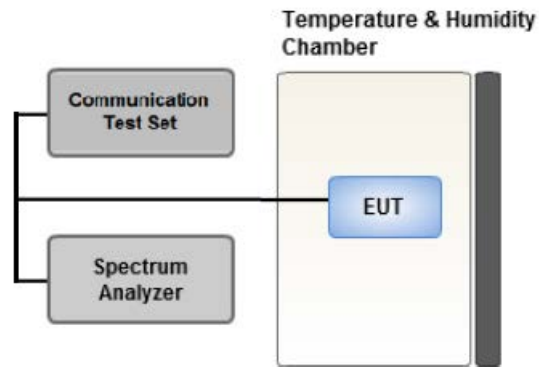

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

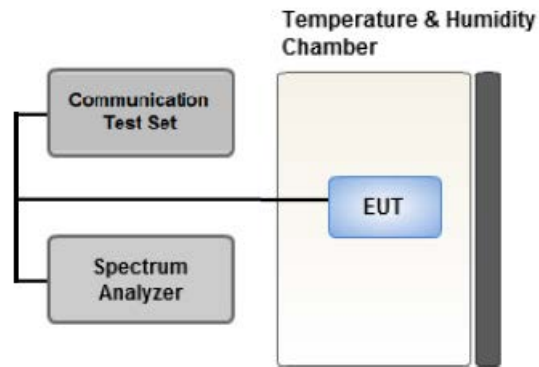

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.


2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 PEAK- TO- AVERAGE RATIO

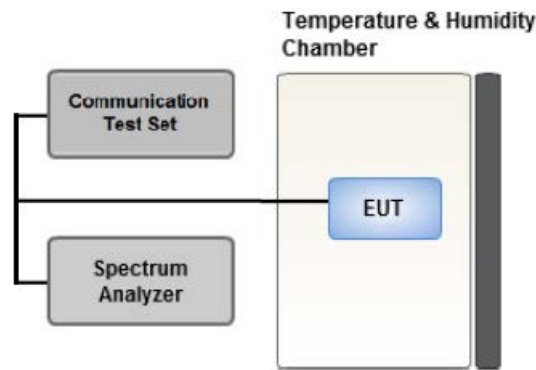

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, Keyboard, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 20 MHz(Main 1 ANT), 15 MHz(Sub 1 ANT))
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported. (Worst case: Open mode)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- Please refer to the table below.
- SM-F766U & additional models were tested and the worst case results are reported.
(Worst case : SM- SM-F766U)

[Main 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Z

[Sub 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - SM-F766U & additional models were tested and the worst case results are reported.
- (Worst case : SM- SM-F766U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5,10,15,20	Mid	Full RB	0
Band Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5,10,15,20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5,10,15,20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1 G HPF+LNA)	HCT CO., LTD.,	F2L2	12/12/2025	Annual
RF Switching System	Switch box(3 G HPF+LNA)	HCT CO., LTD.,	F2L3	12/12/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F2L5	12/12/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F2L14	12/12/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/10/2026	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/11/2026	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03197	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03201	11/28/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/14/2026	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/10/2026	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101733	09/19/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
Signal Analyzer(2 Hz ~ 50.0 GHz)	N9040B	KEYSIGHT	US55230216	12/09/2025	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/23/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)
Parameter	Expanded Uncertainty ($\pm$ kHz)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

-. The decision rule applies 'simple acceptance'

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(g)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(g)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
665.5	LTE B71 (5 MHz)	QPSK	-28.20	29.99	-9.65	1.25	H	<3.00	0.081	19.09	1	13
		16-QAM	-29.12	29.07	-9.65	1.25	H		0.066	18.17		
		64-QAM	-30.22	27.97	-9.65	1.25	H		0.051	17.07		
		256-QAM	-33.19	25.00	-9.65	1.25	H		0.026	14.10		
680.5		QPSK	-28.18	31.27	-9.65	1.28	H		0.108	20.34	1	0
		16-QAM	-28.88	30.57	-9.65	1.28	H		0.092	19.64		
		64-QAM	-30.11	29.34	-9.65	1.28	H		0.069	18.41		
		256-QAM	-33.16	26.29	-9.65	1.28	H		0.034	15.36		
695.5		QPSK	-29.58	30.59	-9.65	1.29	H		0.092	19.65	1	0
		16-QAM	-30.28	29.89	-9.65	1.29	H		0.079	18.95		
		64-QAM	-31.36	28.81	-9.65	1.29	H		0.061	17.87		
		256-QAM	-34.49	25.68	-9.65	1.29	H		0.030	14.74		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
668	LTE B71 (10 MHz)	QPSK	-27.95	30.29	-9.65	1.26	H	<3.00	0.087	19.38	1	25
		16-QAM	-28.83	29.41	-9.65	1.26	H		0.071	18.50		
		64-QAM	-30.10	28.14	-9.65	1.26	H		0.053	17.23		
		256-QAM	-32.82	25.42	-9.65	1.26	H		0.028	14.51		
680.5		QPSK	-28.08	31.37	-9.65	1.28	H		0.111	20.44	1	0
		16-QAM	-28.82	30.63	-9.65	1.28	H		0.093	19.70		
		64-QAM	-30.13	29.32	-9.65	1.28	H		0.069	18.39		
		256-QAM	-33.00	26.45	-9.65	1.28	H		0.036	15.52		
693		QPSK	-29.21	31.05	-9.65	1.29	H		0.103	20.11	1	0
		16-QAM	-30.07	30.19	-9.65	1.29	H		0.084	19.25		
		64-QAM	-31.22	29.04	-9.65	1.29	H		0.065	18.10		
		256-QAM	-34.01	26.25	-9.65	1.29	H		0.034	15.31		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
670.5	LTE B71 (15 MHz)	QPSK	-28.04	30.36	-9.65	1.26	H	<3.00	0.088	19.45	1	38
		16-QAM	-28.73	29.67	-9.65	1.26	H		0.075	18.76		
		64-QAM	-29.96	28.44	-9.65	1.26	H		0.057	17.53		
		256-QAM	-33.03	25.37	-9.65	1.26	H		0.028	14.46		
680.5		QPSK	-27.96	31.49	-9.65	1.28	H		0.114	20.56	1	0
		16-QAM	-28.66	30.79	-9.65	1.28	H		0.097	19.86		
		64-QAM	-29.83	29.62	-9.65	1.28	H		0.074	18.69		
		256-QAM	-32.98	26.47	-9.65	1.28	H		0.036	15.54		
690.5		QPSK	-28.69	31.55	-9.65	1.29	H		0.115	20.61	1	0
		16-QAM	-29.45	30.79	-9.65	1.29	H		0.097	19.85		
		64-QAM	-30.71	29.53	-9.65	1.29	H		0.072	18.59		
		256-QAM	-33.56	26.68	-9.65	1.29	H		0.038	15.74		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
673	LTE B71 (20 MHz)	QPSK	-27.82	30.72	-9.65	1.27	H	<3.00	0.096	19.80	1	50
		16-QAM	-28.61	29.93	-9.65	1.27	H		0.080	19.01		
		64-QAM	-29.74	28.80	-9.65	1.27	H		0.061	17.88		
		256-QAM	-32.73	25.81	-9.65	1.27	H		0.031	14.89		
680.5		QPSK	-27.97	31.48	-9.65	1.28	H		0.114	20.55	1	0
		16-QAM	-28.75	30.70	-9.65	1.28	H		0.095	19.77		
		64-QAM	-29.88	29.57	-9.65	1.28	H		0.073	18.64		
		256-QAM	-32.87	26.58	-9.65	1.28	H		0.037	15.65		
688		QPSK	-28.10	32.09	-9.65	1.29	H		0.130	21.15	1	0
		16-QAM	-28.88	31.31	-9.65	1.29	H		0.109	20.37		
		64-QAM	-30.02	30.17	-9.65	1.29	H		0.084	19.23		
		256-QAM	-33.02	27.17	-9.65	1.29	H		0.042	16.23		

8.2 RADIATED SPURIOUS EMISSIONS

■ MODE: LTE B71
 ■ MODULATION SIGNAL: 20 MHz QPSK
 ■ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
133222 (673.0)	1 346.00	-44.18	7.14	-56.01	1.77	V	-50.64	-13.00	1	50
	2 019.00	-35.84	9.41	-48.29	2.23	H	-41.11	-13.00		
	2 692.00	-52.44	10.61	-63.57	2.60	V	-55.56	-13.00		
133297 (680.5)	1 361.00	-45.86	7.31	-57.85	1.81	V	-52.35	-13.00	1	0
	2 041.50	-33.40	9.46	-45.33	2.25	V	-38.12	-13.00		
	2 722.00	-52.29	10.61	-63.19	2.60	V	-55.18	-13.00		
133372 (688.0)	1 376.00	-45.41	7.48	-57.83	1.85	V	-52.20	-13.00	1	0
	2 064.00	-31.00	9.49	-42.46	2.29	V	-35.26	-13.00		
	2 752.00	-53.35	10.57	-64.18	2.70	H	-56.31	-13.00		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
71	5 MHz	680.5	QPSK	25	0	5.44
			16-QAM			6.14
			64-QAM			6.09
			256-QAM			6.70
	10 MHz		QPSK	50		5.39
			16-QAM			6.10
			64-QAM			6.16
			256-QAM			6.60
	15 MHz		QPSK	75		5.46
			16-QAM			6.16
			64-QAM			6.23
			256-QAM			6.60
	20 MHz		QPSK	100		5.29
			16-QAM			6.07
			64-QAM			6.21
			256-QAM			6.53

Note:

1. Plots of the EUT's P.A.P.R are shown Page 63 ~ 78.
2. P.A.P.R is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
71	5 MHz	680.5	QPSK	25	0	4.5343
			16-QAM			4.5117
			64-QAM			4.5263
			256-QAM			4.5600
	10 MHz		QPSK	50		8.9871
			16-QAM			8.9846
			64-QAM			8.9980
			256-QAM			8.9955
	15 MHz		QPSK	75		13.458
			16-QAM			13.466
			64-QAM			13.453
			256-QAM			13.438
	20 MHz		QPSK	100		17.883
			16-QAM			17.850
			64-QAM			17.849
			256-QAM			17.865

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 79 ~ 94.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
71	5	665.50	9.1027	28.591	-57.855	-29.264	-13.00
		680.50	6.0319	28.591	-57.737	-29.146	
		695.50	9.1825	28.591	-57.843	-29.252	
	10	668.00	8.5942	28.591	-58.350	-29.759	
		680.50	9.1127	28.591	-57.711	-29.120	
		693.00	9.3819	28.591	-56.529	-27.938	
	15	670.50	8.3250	28.591	-56.781	-28.190	
		680.50	8.2951	28.591	-56.275	-27.684	
		690.50	3.7688	27.976	-56.877	-28.901	
	20	673.00	4.9552	27.976	-57.501	-29.525	
		680.50	3.7688	27.976	-57.814	-29.838	
		688.00	3.7887	27.976	-57.728	-29.752	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 95 ~ 106.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 107 ~ 130.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B71</u>
OPERATING FREQUENCY:	<u>665,500,000 Hz</u>
CHANNEL:	<u>133147 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.900 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	665 499 998	0.0	0.000 000	0.000
100 %		-30	665 500 000	2.7	0.000 000	0.004
100 %		-20	665 499 999	1.8	0.000 000	0.003
100 %		-10	665 500 000	2.4	0.000 000	0.004
100 %		0	665 499 995	-2.1	0.000 000	-0.003
100 %		+10	665 499 995	-2.2	0.000 000	-0.003
100 %		+30	665 499 999	1.7	0.000 000	0.003
100 %		+40	665 499 995	-2.4	0.000 000	-0.004
100 %		+50	665 500 000	2.6	0.000 000	0.004
Batt. Endpoint	3.300	+20	665 499 995	-2.5	0.000 000	-0.004

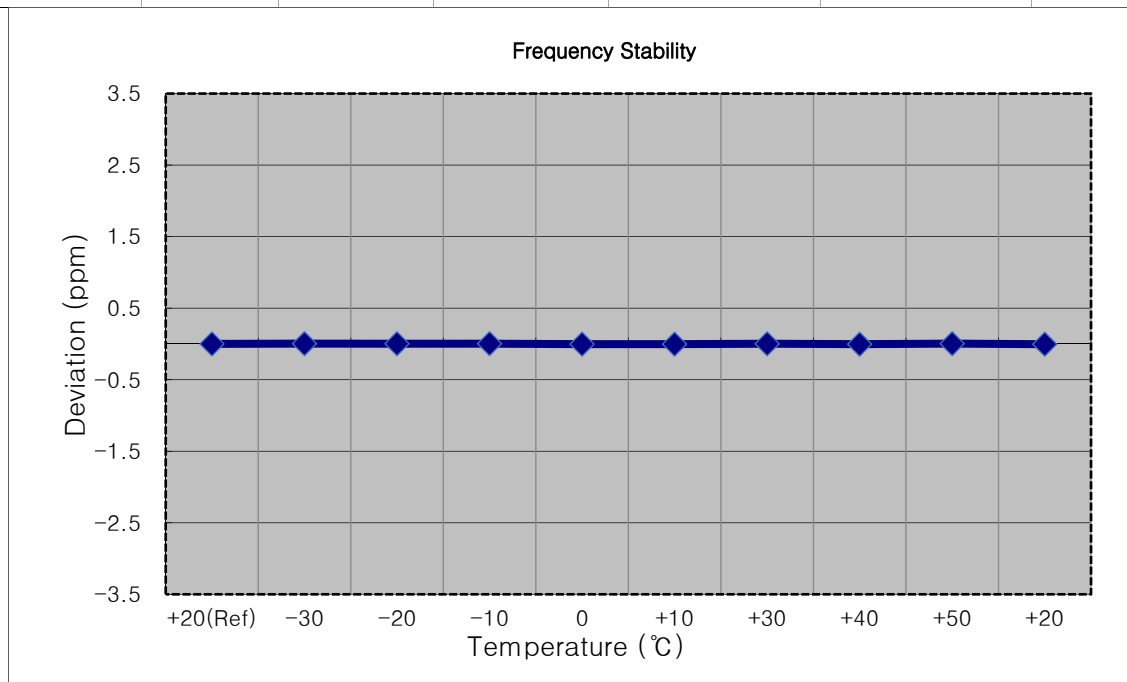


MODE: LTE B71
 OPERATING FREQUENCY: 668,000,000 Hz
 CHANNEL: 133172 (10 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	667 999 998	0.0	0.000 000	0.000
100 %		-30	668 000 001	3.0	0.000 000	0.004
100 %		-20	667 999 995	-2.6	0.000 000	-0.004
100 %		-10	667 999 995	-2.8	0.000 000	-0.004
100 %		0	668 000 002	3.9	0.000 001	0.006
100 %		+10	668 000 001	3.0	0.000 000	0.004
100 %		+30	668 000 001	3.1	0.000 000	0.005
100 %		+40	668 000 001	2.9	0.000 000	0.004
100 %		+50	668 000 001	2.9	0.000 000	0.004
Batt. Endpoint	3.300	+20	668 000 001	3.1	0.000 000	0.005

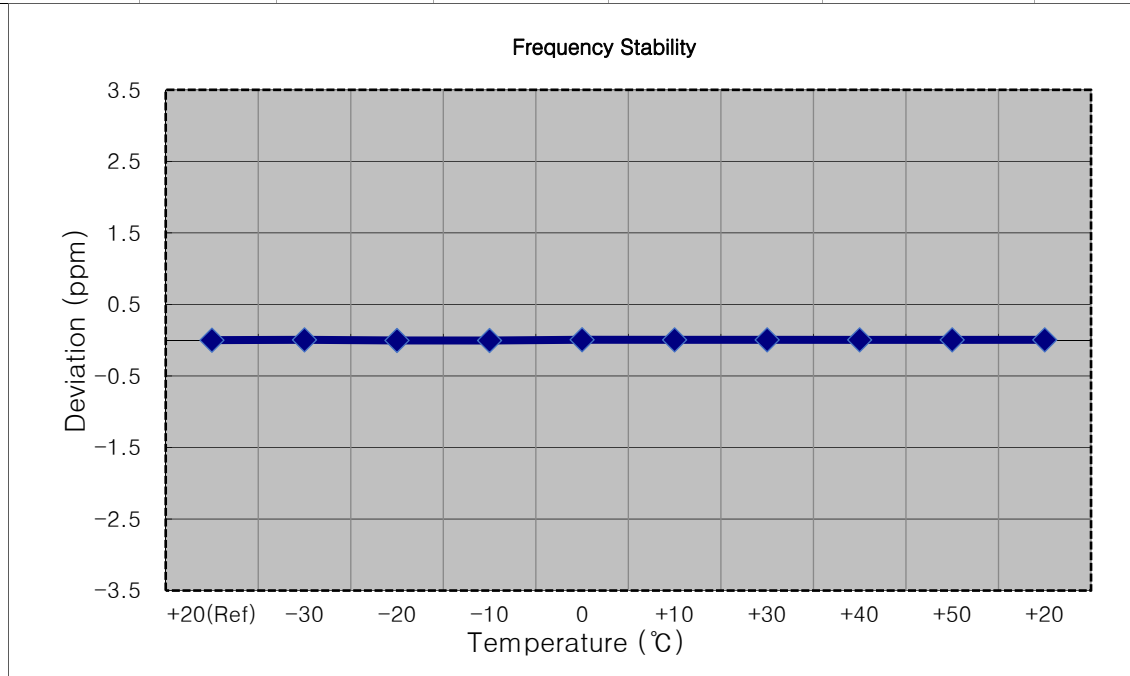


☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 670,500,000 Hz
☐ CHANNEL: 133197 (15 MHz)
☐ REFERENCE VOLTAGE: 3.900 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	670 500 002	0.0	0.000 000	0.000
100 %		-30	670 500 000	-1.6	0.000 000	-0.002
100 %		-20	670 500 003	1.1	0.000 000	0.002
100 %		-10	670 500 004	1.8	0.000 000	0.003
100 %		0	670 500 004	2.0	0.000 000	0.003
100 %		+10	670 500 000	-1.6	0.000 000	-0.002
100 %		+30	670 500 004	2.5	0.000 000	0.004
100 %		+40	670 500 005	2.7	0.000 000	0.004
100 %		+50	670 500 000	-1.9	0.000 000	-0.003
Batt. Endpoint	3.300	+20	670 500 004	2.4	0.000 000	0.004

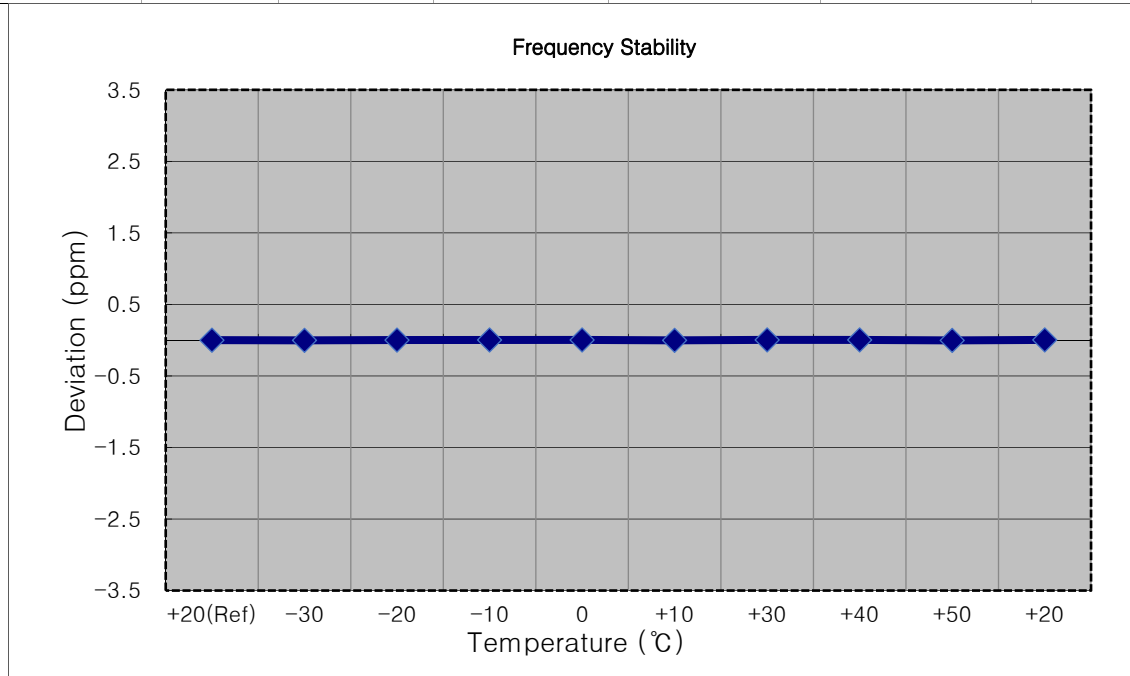


MODE: LTE B71
 OPERATING FREQUENCY: 673,000,000 Hz
 CHANNEL: 133222 (20 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	673 000 002	0.0	0.000 000	0.000
100 %		-30	673 000 003	1.2	0.000 000	0.002
100 %		-20	673 000 000	-2.1	0.000 000	-0.003
100 %		-10	673 000 004	2.3	0.000 000	0.003
100 %		0	673 000 000	-1.5	0.000 000	-0.002
100 %		+10	673 000 000	-1.8	0.000 000	-0.003
100 %		+30	673 000 004	2.0	0.000 000	0.003
100 %		+40	673 000 000	-1.8	0.000 000	-0.003
100 %		+50	673 000 000	-1.7	0.000 000	-0.003
Batt. Endpoint	3.300	+20	673 000 004	1.7	0.000 000	0.003

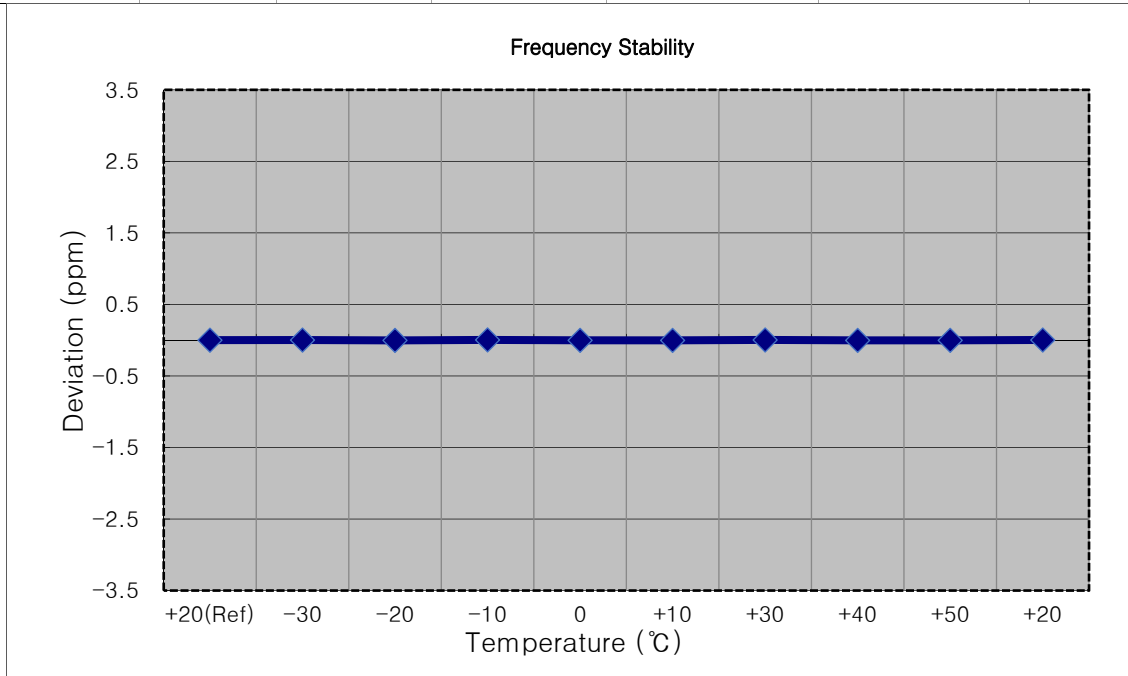


MODE: LTE B71
 OPERATING FREQUENCY: 680,500,000 Hz
 CHANNEL: 133297 (5 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 500 002	0.0	0.000 000	0.000
100 %		-30	680 500 005	2.9	0.000 000	0.004
100 %		-20	680 500 004	2.1	0.000 000	0.003
100 %		-10	680 500 004	1.7	0.000 000	0.002
100 %		0	680 500 004	2.2	0.000 000	0.003
100 %		+10	680 500 001	-1.7	0.000 000	-0.002
100 %		+30	680 500 005	2.9	0.000 000	0.004
100 %		+40	680 500 004	2.0	0.000 000	0.003
100 %		+50	680 500 005	2.4	0.000 000	0.004
Batt. Endpoint	3.300	+20	680 500 004	2.1	0.000 000	0.003

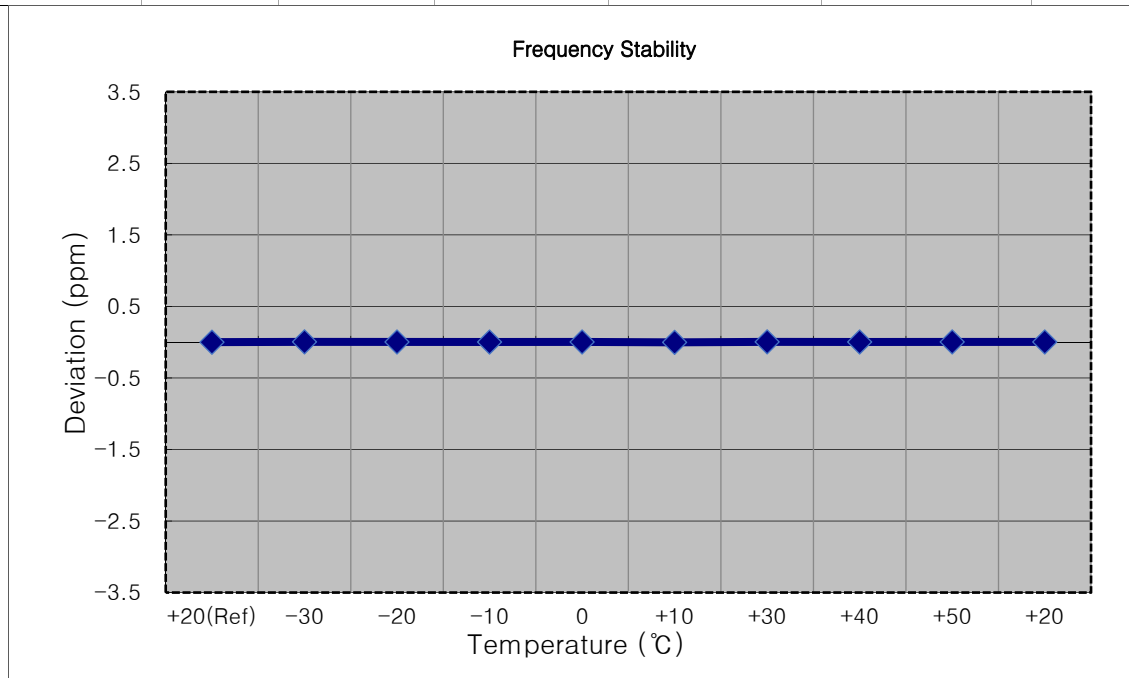


☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 680,500,000 Hz
☐ CHANNEL: 133297 (10 MHz)
☐ REFERENCE VOLTAGE: 3.900 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 500 002	0.0	0.000 000	0.000
100 %		-30	680 500 004	2.5	0.000 000	0.004
100 %		-20	680 500 002	0.8	0.000 000	0.001
100 %		-10	680 500 003	1.6	0.000 000	0.002
100 %		0	680 500 003	1.3	0.000 000	0.002
100 %		+10	680 500 002	0.8	0.000 000	0.001
100 %		+30	680 500 003	1.5	0.000 000	0.002
100 %		+40	680 500 003	1.3	0.000 000	0.002
100 %		+50	680 500 003	1.1	0.000 000	0.002
Batt. Endpoint	3.300	+20	680 500 003	1.1	0.000 000	0.002

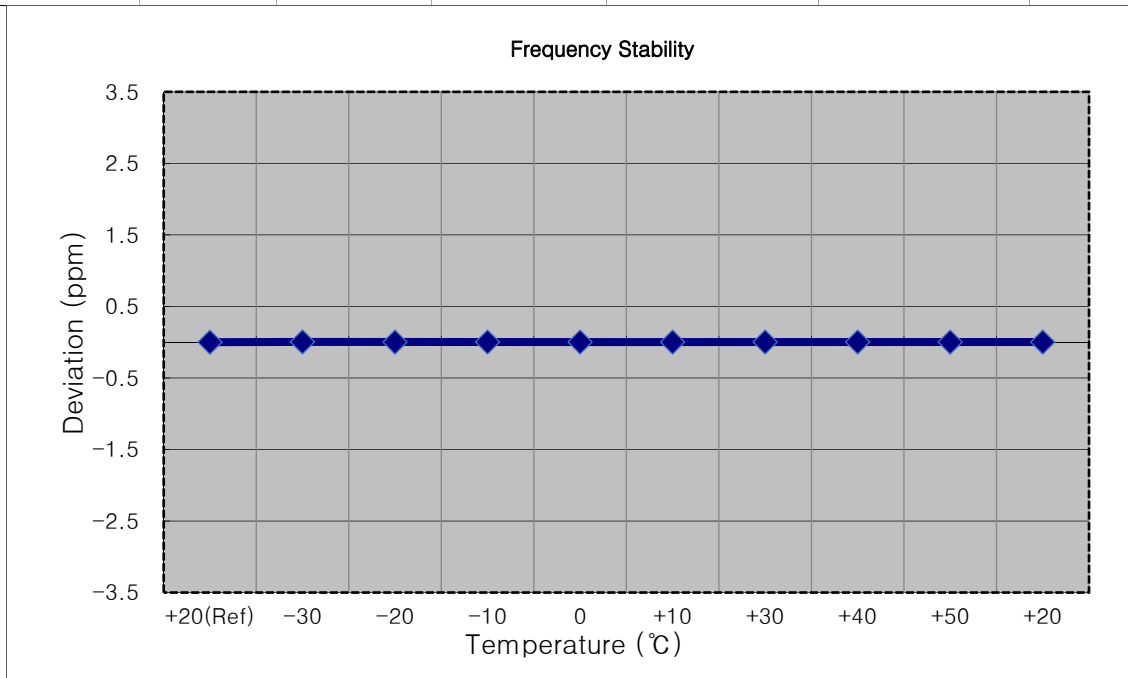


MODE: LTE B71
 OPERATING FREQUENCY: 680,500,000 Hz
 CHANNEL: 133297 (15 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 499 999	0.0	0.000 000	0.000
100 %		-30	680 500 000	0.7	0.000 000	0.001
100 %		-20	680 500 000	1.0	0.000 000	0.001
100 %		-10	680 499 998	-0.6	0.000 000	-0.001
100 %		0	680 500 000	0.8	0.000 000	0.001
100 %		+10	680 500 000	1.1	0.000 000	0.002
100 %		+30	680 500 000	0.9	0.000 000	0.001
100 %		+40	680 500 000	1.2	0.000 000	0.002
100 %		+50	680 500 000	0.9	0.000 000	0.001
Batt. Endpoint	3.300	+20	680 500 000	1.2	0.000 000	0.002

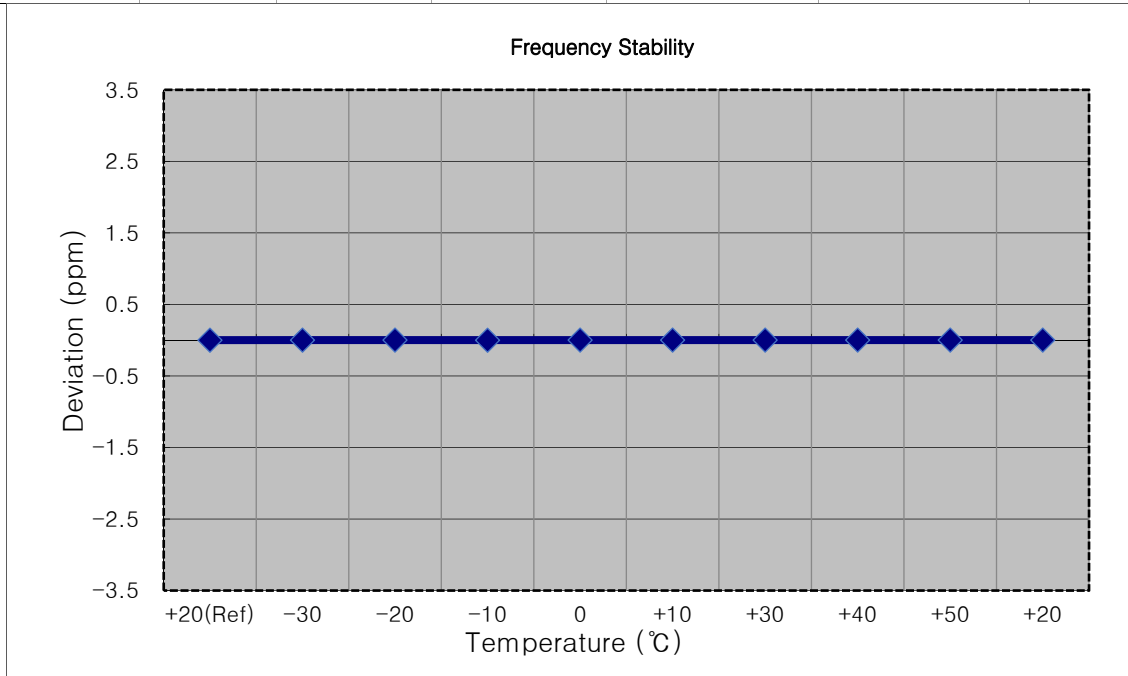


MODE: LTE B71
 OPERATING FREQUENCY: 680,500,000 Hz
 CHANNEL: 133297 (20 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 499 998	0.0	0.000 000	0.000
100 %		-30	680 500 000	1.7	0.000 000	0.002
100 %		-20	680 500 001	3.0	0.000 000	0.004
100 %		-10	680 499 997	-1.4	0.000 000	-0.002
100 %		0	680 500 001	3.0	0.000 000	0.004
100 %		+10	680 500 000	1.5	0.000 000	0.002
100 %		+30	680 500 000	1.7	0.000 000	0.002
100 %		+40	680 500 000	1.5	0.000 000	0.002
100 %		+50	680 500 001	2.4	0.000 000	0.004
Batt. Endpoint	3.300	+20	680 500 001	2.4	0.000 000	0.004

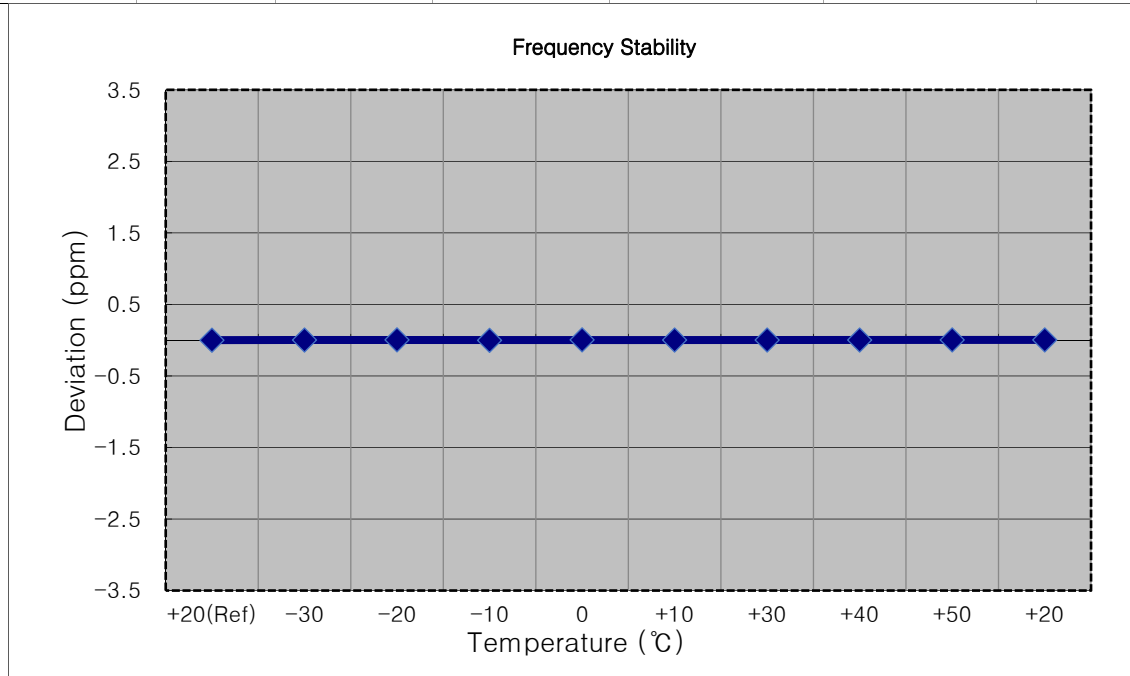


MODE: LTE B71
 OPERATING FREQUENCY: 695,500,000 Hz
 CHANNEL: 133447 (5 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	695 500 002	0.0	0.000 000	0.000
100 %		-30	695 500 001	-1.6	0.000 000	-0.002
100 %		-20	695 500 005	3.2	0.000 000	0.005
100 %		-10	695 500 006	3.6	0.000 001	0.005
100 %		0	695 500 006	3.6	0.000 001	0.005
100 %		+10	695 500 004	2.3	0.000 000	0.003
100 %		+30	695 500 000	-1.9	0.000 000	-0.003
100 %		+40	695 500 004	1.4	0.000 000	0.002
100 %		+50	695 500 000	-1.7	0.000 000	-0.002
Batt. Endpoint	3.300	+20	695 500 005	3.2	0.000 000	0.005

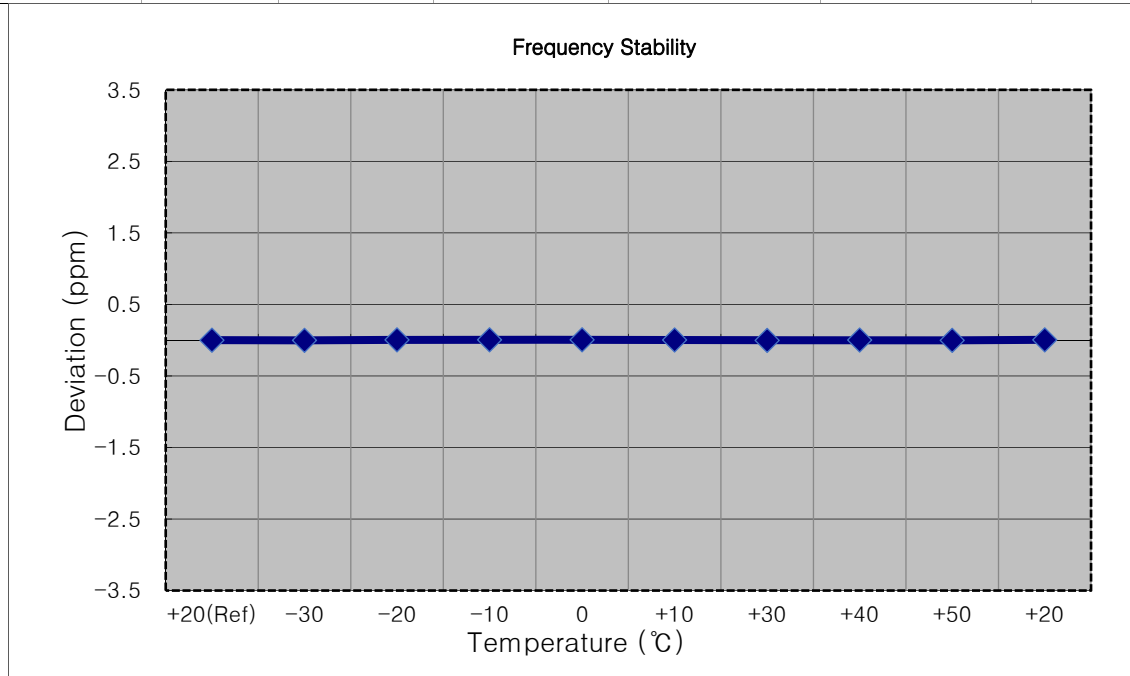


MODE: LTE B71
 OPERATING FREQUENCY: 693,000,000 Hz
 CHANNEL: 133422 (10 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	693 000 003	0.0	0.000 000	0.000
100 %		-30	693 000 005	2.1	0.000 000	0.003
100 %		-20	693 000 004	1.0	0.000 000	0.001
100 %		-10	693 000 005	1.8	0.000 000	0.003
100 %		0	693 000 004	1.6	0.000 000	0.002
100 %		+10	693 000 002	-0.8	0.000 000	-0.001
100 %		+30	693 000 005	2.5	0.000 000	0.004
100 %		+40	693 000 005	1.8	0.000 000	0.003
100 %		+50	693 000 001	-2.0	0.000 000	-0.003
Batt. Endpoint	3.300	+20	693 000 005	1.9	0.000 000	0.003

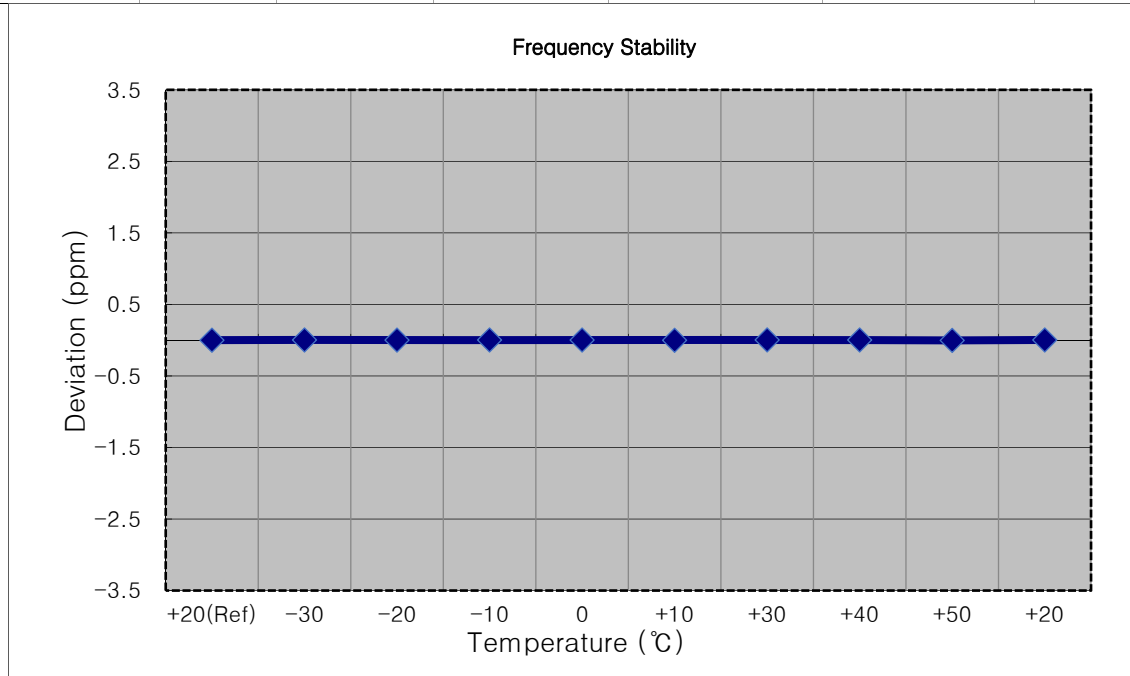


MODE: LTE B71
 OPERATING FREQUENCY: 690,500,000 Hz
 CHANNEL: 133397 (15 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	690 499 999	0.0	0.000 000	0.000
100 %		-30	690 500 001	1.3	0.000 000	0.002
100 %		-20	690 500 001	2.2	0.000 000	0.003
100 %		-10	690 500 001	1.5	0.000 000	0.002
100 %		0	690 499 997	-1.8	0.000 000	-0.003
100 %		+10	690 500 001	1.4	0.000 000	0.002
100 %		+30	690 500 000	1.2	0.000 000	0.002
100 %		+40	690 500 001	2.1	0.000 000	0.003
100 %		+50	690 500 000	0.9	0.000 000	0.001
Batt. Endpoint	3.300	+20	690 500 000	0.8	0.000 000	0.001

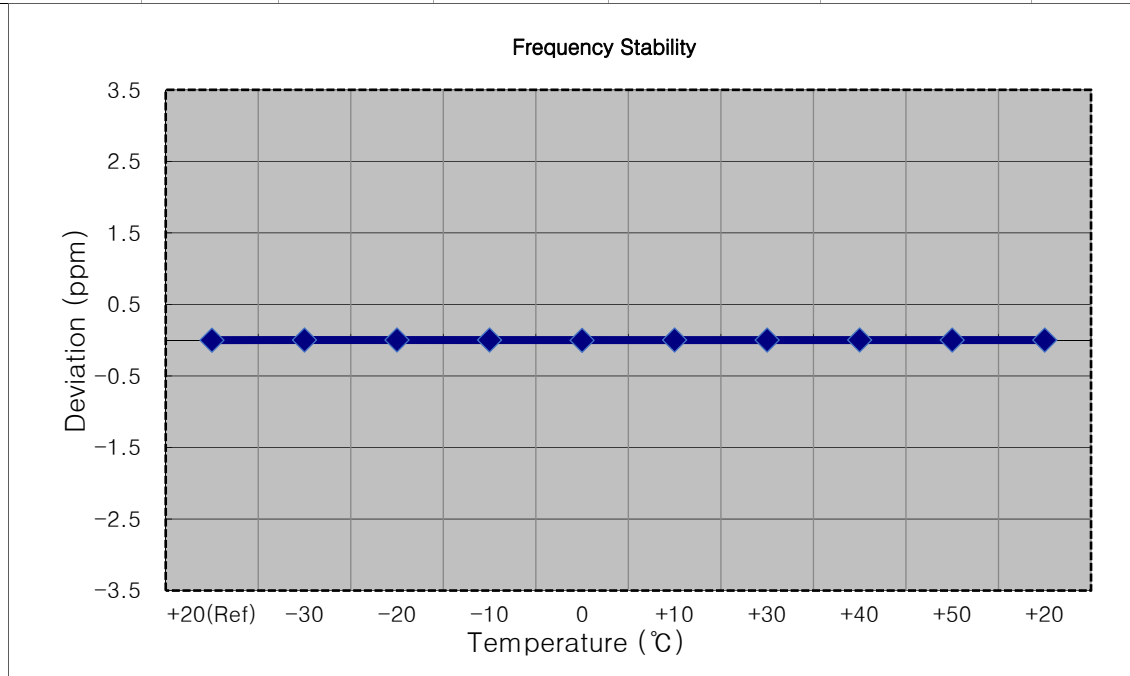

MODE: LTE B71
 OPERATING FREQUENCY: 688,000,000 Hz
 CHANNEL: 133372 (20 MHz)
 REFERENCE VOLTAGE: 3.900 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	688 000 002	0.0	0.000 000	0.000
100 %		-30	688 000 003	1.8	0.000 000	0.003
100 %		-20	688 000 003	1.6	0.000 000	0.002
100 %		-10	688 000 003	1.3	0.000 000	0.002
100 %		0	688 000 003	1.8	0.000 000	0.003
100 %		+10	688 000 003	1.0	0.000 000	0.001
100 %		+30	688 000 003	1.6	0.000 000	0.002
100 %		+40	688 000 003	1.1	0.000 000	0.002
100 %		+50	688 000 003	1.5	0.000 000	0.002
Batt. Endpoint	3.300	+20	688 000 003	1.1	0.000 000	0.002

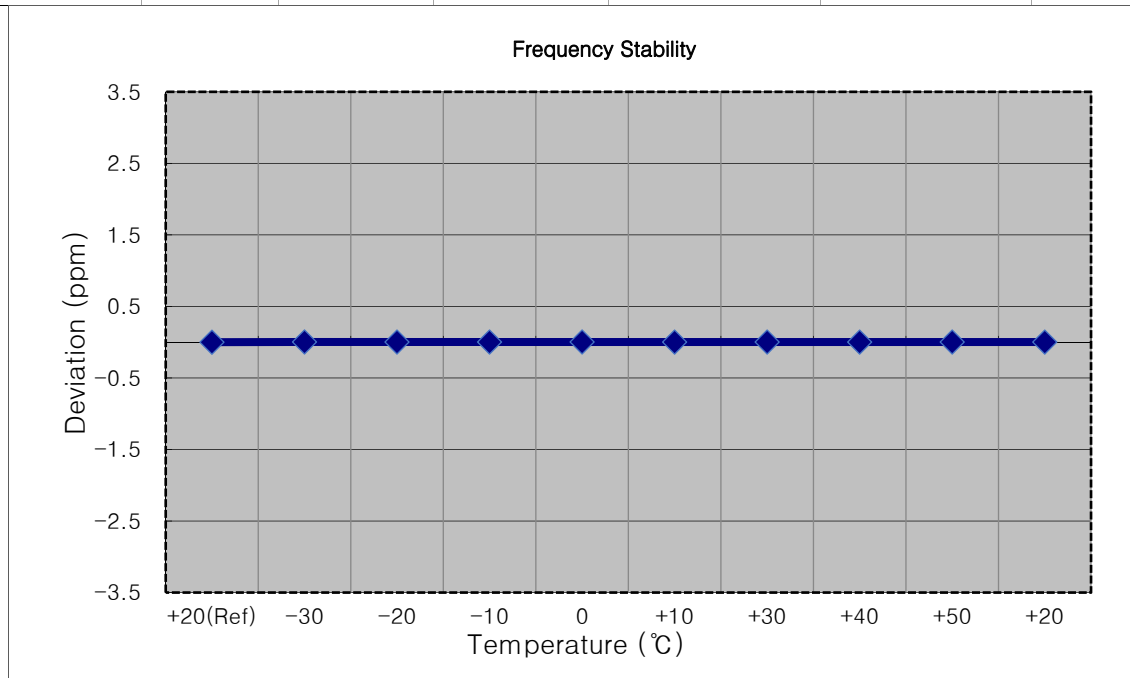

9. TEST DATA(Sub 1 ANT)

9.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
665.5	LTE B71 (5 MHz)	QPSK	-31.36	26.83	-9.65	1.25	H	<3.00	0.039	15.93	1	24
		16-QAM	-32.24	25.95	-9.65	1.25	H		0.032	15.05		
		64-QAM	-33.35	24.84	-9.65	1.25	H		0.025	13.94		
		256-QAM	-36.14	22.05	-9.65	1.25	H		0.013	11.15		
680.5		QPSK	-30.34	29.11	-9.65	1.28	H		0.066	18.18	1	13
		16-QAM	-31.15	28.30	-9.65	1.28	H		0.055	17.37		
		64-QAM	-32.28	27.17	-9.65	1.28	H		0.042	16.24		
		256-QAM	-35.19	24.26	-9.65	1.28	H		0.022	13.33		
695.5		QPSK	-34.04	26.13	-9.65	1.29	H		0.033	15.19	1	24
		16-QAM	-34.90	25.27	-9.65	1.29	H		0.027	14.33		
		64-QAM	-36.05	24.12	-9.65	1.29	H		0.021	13.18		
		256-QAM	-38.86	21.31	-9.65	1.29	H		0.011	10.37		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
668	LTE B71 (10 MHz)	QPSK	-30.86	27.38	-9.65	1.26	H	<3.00	0.044	16.47	1	49
		16-QAM	-31.65	26.59	-9.65	1.26	H		0.037	15.68		
		64-QAM	-32.75	25.49	-9.65	1.26	H		0.029	14.58		
		256-QAM	-35.65	22.59	-9.65	1.26	H		0.015	11.68		
680.5		QPSK	-30.39	29.06	-9.65	1.28	H		0.065	18.13	1	25
		16-QAM	-31.15	28.30	-9.65	1.28	H		0.055	17.37		
		64-QAM	-32.25	27.20	-9.65	1.28	H		0.042	16.27		
		256-QAM	-35.21	24.24	-9.65	1.28	H		0.021	13.31		
693		QPSK	-33.77	26.49	-9.65	1.29	H		0.036	15.55	1	49
		16-QAM	-34.65	25.61	-9.65	1.29	H		0.029	14.67		
		64-QAM	-35.77	24.49	-9.65	1.29	H		0.023	13.55		
		256-QAM	-38.58	21.68	-9.65	1.29	H		0.012	10.74		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
670.5	LTE B71 (15 MHz)	QPSK	-30.26	28.14	-9.65	1.26	H	< 3.00	0.053	17.23	1	99
		16-QAM	-30.95	27.45	-9.65	1.26	H		0.045	16.54		
		64-QAM	-32.11	26.29	-9.65	1.26	H		0.035	15.38		
		256-QAM	-35.17	23.23	-9.65	1.26	H		0.017	12.32		
680.5		QPSK	-30.19	29.26	-9.65	1.28	H		0.068	18.33	1	38
		16-QAM	-30.97	28.48	-9.65	1.28	H		0.057	17.55		
		64-QAM	-32.09	27.36	-9.65	1.28	H		0.044	16.43		
		256-QAM	-35.07	24.38	-9.65	1.28	H		0.022	13.45		
690.5		QPSK	-33.75	26.49	-9.65	1.29	H		0.036	15.55	1	74
		16-QAM	-34.59	25.65	-9.65	1.29	H		0.030	14.71		
		64-QAM	-35.72	24.52	-9.65	1.29	H		0.023	13.58		
		256-QAM	-38.59	21.65	-9.65	1.29	H		0.012	10.71		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
673	LTE B71 (20 MHz)	QPSK	-30.20	28.34	-9.65	1.27	H	<3.00	0.055	17.42	1	99
		16-QAM	-31.00	27.54	-9.65	1.27	H		0.046	16.62		
		64-QAM	-32.14	26.40	-9.65	1.27	H		0.035	15.48		
		256-QAM	-35.07	23.47	-9.65	1.27	H		0.018	12.55		
680.5		QPSK	-30.26	29.19	-9.65	1.28	H		0.067	18.26	1	50
		16-QAM	-31.00	28.45	-9.65	1.28	H		0.057	17.52		
		64-QAM	-32.10	27.35	-9.65	1.28	H		0.044	16.42		
		256-QAM	-35.13	24.32	-9.65	1.28	H		0.022	13.39		
688		QPSK	-33.81	26.38	-9.65	1.29	H		0.035	15.44	1	99
		16-QAM	-34.64	25.55	-9.65	1.29	H		0.029	14.61		
		64-QAM	-35.77	24.42	-9.65	1.29	H		0.022	13.48		
		256-QAM	-38.66	21.53	-9.65	1.29	H		0.012	10.59		

9.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B71
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
133197 (670.5)	1 341.00	-43.46	7.10	-55.28	1.77	V	-49.95	-13.00	1	74
	2 011.50	-32.38	9.39	-45.11	2.24	V	-37.96	-13.00		
	2 682.00	-52.96	10.58	-64.01	2.61	V	-56.04	-13.00		
133297 (680.5)	1 361.00	-41.87	7.31	-53.86	1.81	V	-48.36	-13.00	1	38
	2 041.50	-32.42	9.46	-44.35	2.25	H	-37.14	-13.00		
	2 722.00	-52.77	10.61	-63.67	2.60	V	-55.66	-13.00		
133397 (690.5)	1 381.00	-43.73	7.54	-56.32	1.87	V	-50.65	-13.00	1	74
	2 071.50	-39.50	9.50	-50.90	2.29	H	-43.69	-13.00		
	2 762.00	-52.61	10.58	-63.48	2.71	V	-55.61	-13.00		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
71	5 MHz	680.5	QPSK	25	0	5.76
			16-QAM			6.42
			64-QAM			6.39
			256-QAM			6.66
	10 MHz		QPSK	50		5.47
			16-QAM			6.22
			64-QAM			6.15
			256-QAM			6.50
	15 MHz		QPSK	75		5.52
			16-QAM			6.19
			64-QAM			6.19
			256-QAM			6.39
	20 MHz		QPSK	100		5.20
			16-QAM			6.06
			64-QAM			6.05
			256-QAM			6.31

Note:

1. Plots of the EUT's P.A.P.R are shown Page 132 ~ 147.
2. P.A.P.R is not required. These values are reported for information only.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
71	5 MHz	680.5	QPSK	25	0	4.5307
			16-QAM			4.5131
			64-QAM			4.5267
			256-QAM			4.5539
	10 MHz		QPSK	50		9.0145
			16-QAM			9.0109
			64-QAM			8.9880
			256-QAM			8.9993
	15 MHz		QPSK	75		13.475
			16-QAM			13.452
			64-QAM			13.453
			256-QAM			13.473
	20 MHz		QPSK	100		17.949
			16-QAM			17.859
			64-QAM			17.877
			256-QAM			17.842

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 148 ~ 163.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
71	5	665.50	9.1226	28.591	-57.286	-28.695	-13.00
		680.50	9.1426	28.591	-58.162	-29.571	
		695.50	4.8854	27.976	-57.717	-29.741	
	10	668.00	9.1226	28.591	-58.358	-29.767	
		680.50	7.1984	28.591	-57.567	-28.976	
		693.00	8.2852	28.591	-56.240	-27.649	
	15	670.50	3.8286	27.976	-57.781	-29.805	
		680.50	5.0250	28.591	-58.201	-29.610	
		690.50	4.9153	27.976	-58.139	-30.163	
	20	673.00	8.8535	28.591	-57.644	-29.053	
		680.50	3.0409	27.976	-58.258	-30.282	
		688.00	9.8604	28.591	-57.848	-29.257	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 164 ~ 175.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 176 ~ 199.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B71</u>
OPERATING FREQUENCY:	<u>665,500,000 Hz</u>
CHANNEL:	<u>133147 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.900 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	ppm
100 %	3.900	+20(Ref)	665 500 003	0.0	0.000 000	0.000
100 %		-30	665 500 002	-1.5	0.000 000	-0.002
100 %		-20	665 500 007	3.8	0.000 001	0.006
100 %		-10	665 500 007	4.4	0.000 001	0.007
100 %		0	665 500 007	4.2	0.000 001	0.006
100 %		+10	665 500 006	3.0	0.000 000	0.005
100 %		+30	665 499 999	-4.0	-0.000 001	-0.006
100 %		+40	665 500 006	2.7	0.000 000	0.004
100 %		+50	665 500 005	2.3	0.000 000	0.003
Batt. Endpoint	3.300	+20	665 499 999	-3.6	-0.000 001	-0.005

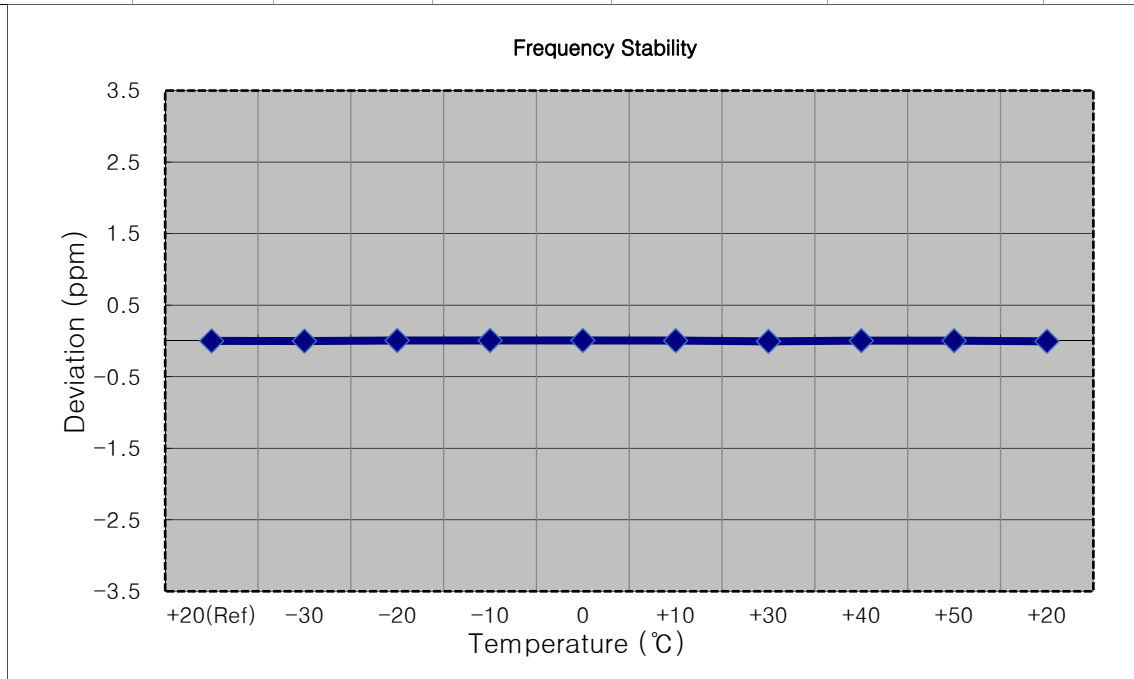


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 668,000,000 Hz
- ▣ CHANNEL: 133172 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	668 000 003	0.0	0.000 000	0.000
100 %		-30	668 000 006	2.7	0.000 000	0.004
100 %		-20	668 000 007	4.2	0.000 001	0.006
100 %		-10	668 000 006	3.2	0.000 000	0.005
100 %		0	668 000 006	2.6	0.000 000	0.004
100 %		+10	668 000 005	2.2	0.000 000	0.003
100 %		+30	668 000 007	3.9	0.000 001	0.006
100 %		+40	668 000 007	3.5	0.000 001	0.005
100 %		+50	668 000 007	3.3	0.000 000	0.005
Batt. Endpoint	3.300	+20	668 000 007	3.8	0.000 001	0.006

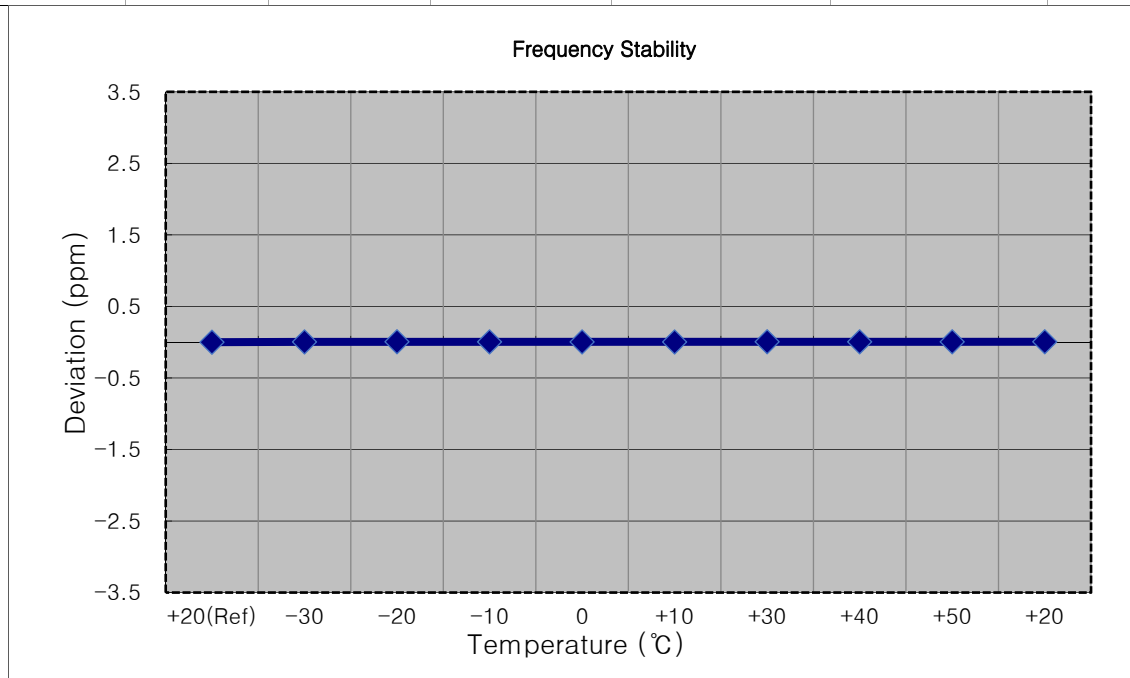


MODE:	<u>LTE B71</u>
OPERATING FREQUENCY:	<u>670,500,000 Hz</u>
CHANNEL:	<u>133197 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.900 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	670 500 002	0.0	0.000 000	0.000
100 %		-30	670 500 003	1.4	0.000 000	0.002
100 %		-20	670 500 005	2.7	0.000 000	0.004
100 %		-10	670 500 000	-1.7	0.000 000	-0.003
100 %		0	670 500 004	2.0	0.000 000	0.003
100 %		+10	670 500 005	3.4	0.000 001	0.005
100 %		+30	670 500 004	1.7	0.000 000	0.003
100 %		+40	670 500 004	2.5	0.000 000	0.004
100 %		+50	670 500 004	2.6	0.000 000	0.004
Batt. Endpoint	3.300	+20	670 500 004	1.8	0.000 000	0.003

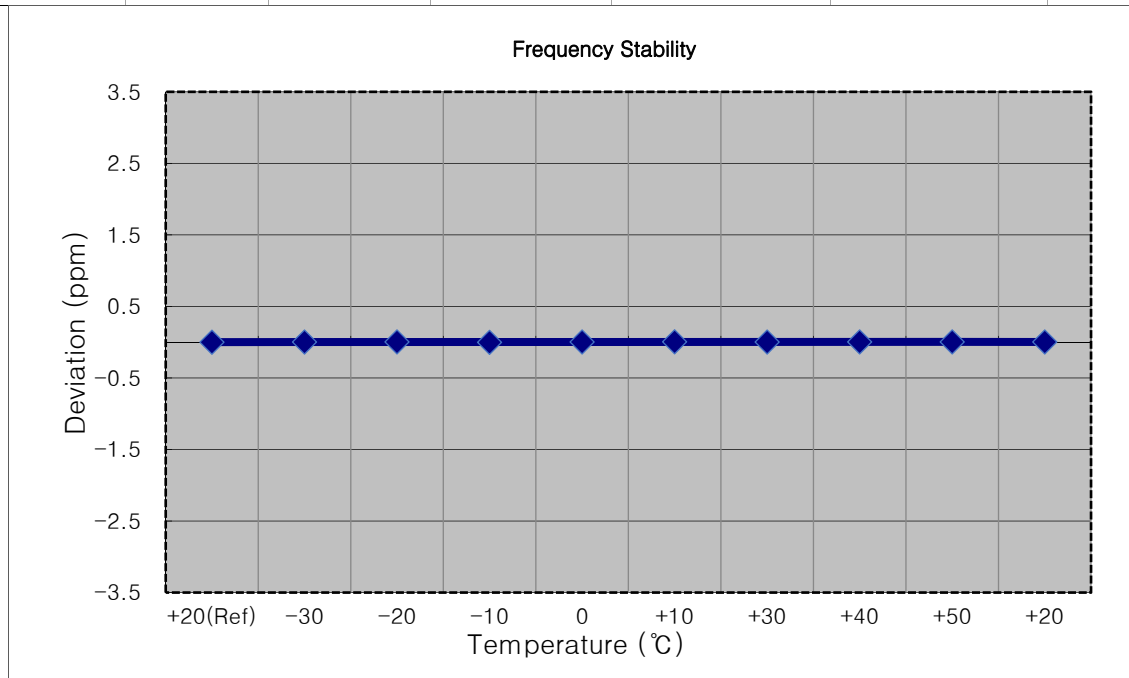


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 673,000,000 Hz
- ▣ CHANNEL: 133222 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	673 000 003	0.0	0.000 000	0.000
100 %		-30	673 000 005	2.6	0.000 000	0.004
100 %		-20	673 000 005	2.1	0.000 000	0.003
100 %		-10	673 000 006	3.6	0.000 001	0.005
100 %		0	673 000 006	3.0	0.000 000	0.004
100 %		+10	673 000 006	3.0	0.000 000	0.004
100 %		+30	673 000 005	2.2	0.000 000	0.003
100 %		+40	673 000 004	1.7	0.000 000	0.003
100 %		+50	673 000 005	2.7	0.000 000	0.004
Batt. Endpoint	3.300	+20	673 000 006	3.0	0.000 000	0.004

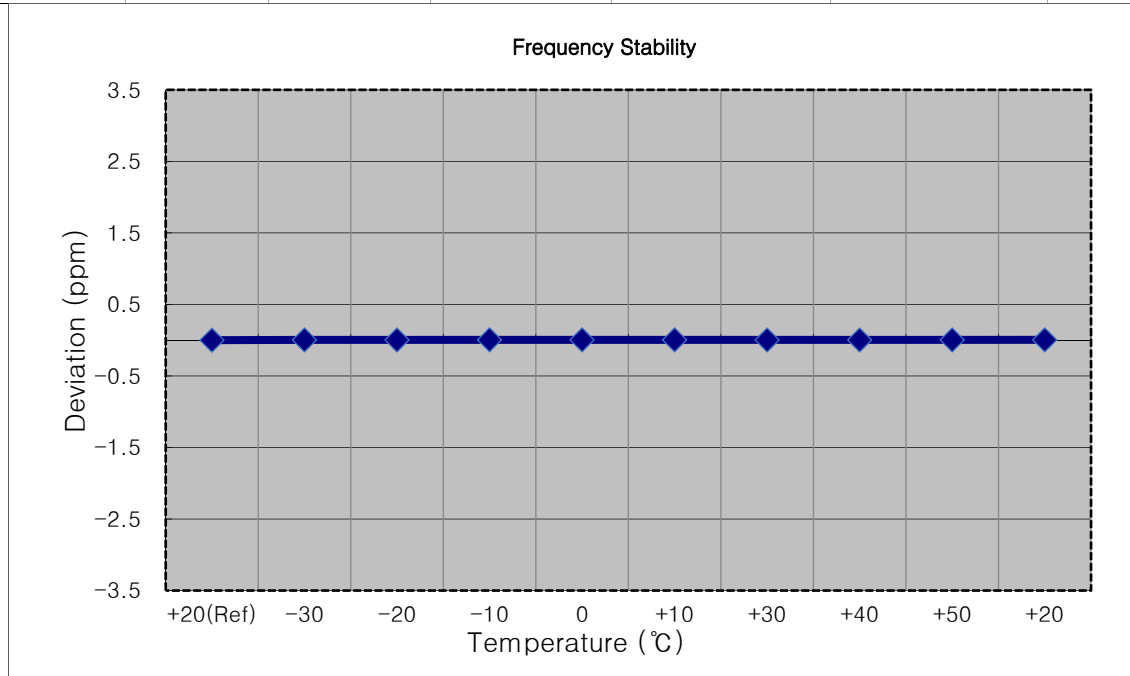


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 500 003	0.0	0.000 000	0.000
100 %		-30	680 500 005	2.3	0.000 000	0.003
100 %		-20	680 500 000	-2.4	0.000 000	-0.004
100 %		-10	680 500 001	-1.6	0.000 000	-0.002
100 %		0	680 500 000	-2.8	0.000 000	-0.004
100 %		+10	680 500 000	-3.3	0.000 000	-0.005
100 %		+30	680 500 000	-3.0	0.000 000	-0.004
100 %		+40	680 500 004	1.6	0.000 000	0.002
100 %		+50	680 500 001	-2.3	0.000 000	-0.003
Batt. Endpoint	3.300	+20	680 500 001	-1.9	0.000 000	-0.003

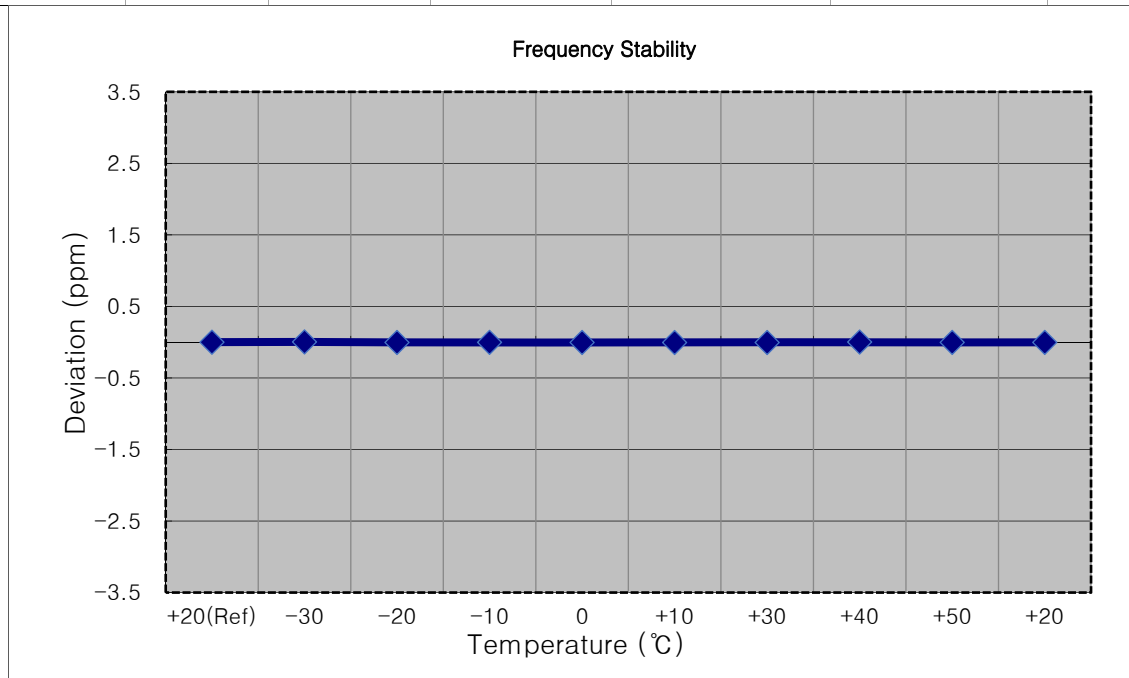


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 499 997	0.0	0.000 000	0.000
100 %		-30	680 499 995	-2.4	0.000 000	-0.004
100 %		-20	680 499 995	-1.6	0.000 000	-0.002
100 %		-10	680 499 999	2.4	0.000 000	0.004
100 %		0	680 499 999	2.1	0.000 000	0.003
100 %		+10	680 500 000	3.4	0.000 000	0.005
100 %		+30	680 500 000	2.6	0.000 000	0.004
100 %		+40	680 499 999	2.4	0.000 000	0.004
100 %		+50	680 499 995	-2.1	0.000 000	-0.003
Batt. Endpoint	3.300	+20	680 499 999	2.3	0.000 000	0.003

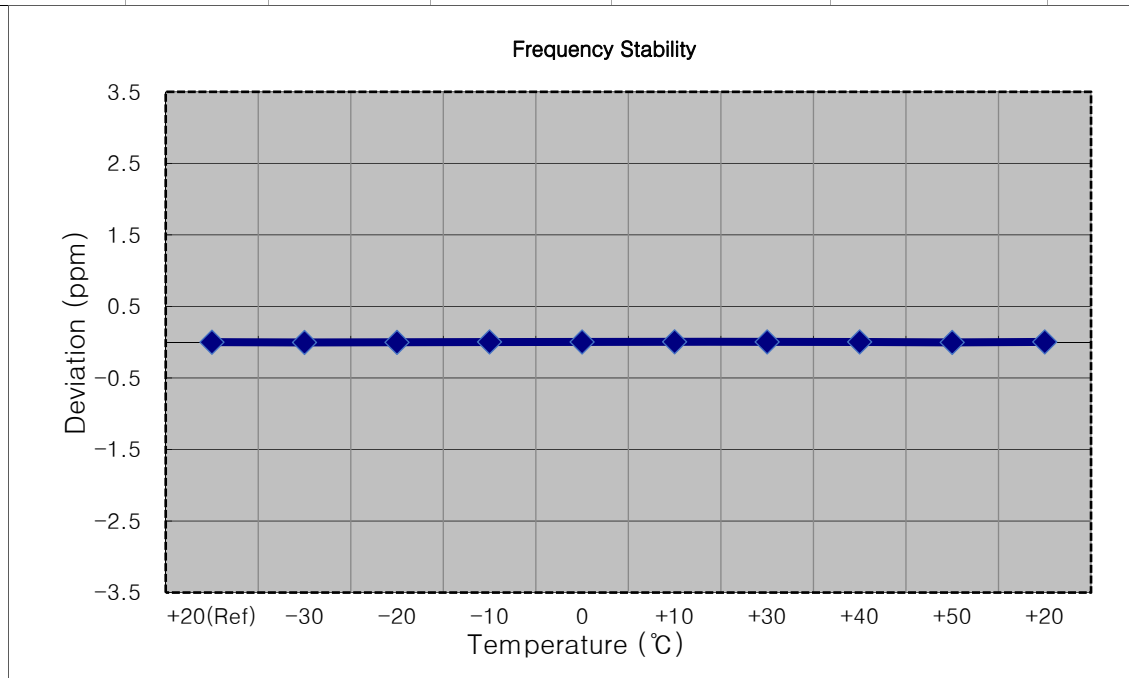


MODE:	<u>LTE B71</u>
OPERATING FREQUENCY:	<u>680,500,000 Hz</u>
CHANNEL:	<u>133297 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.900 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 500 003	0.0	0.000 000	0.000
100 %		-30	680 500 004	1.3	0.000 000	0.002
100 %		-20	680 500 004	1.2	0.000 000	0.002
100 %		-10	680 500 004	1.4	0.000 000	0.002
100 %		0	680 500 005	2.9	0.000 000	0.004
100 %		+10	680 500 005	2.4	0.000 000	0.004
100 %		+30	680 500 005	2.6	0.000 000	0.004
100 %		+40	680 500 005	2.1	0.000 000	0.003
100 %		+50	680 500 004	1.9	0.000 000	0.003
Batt. Endpoint	3.300	+20	680 500 004	1.4	0.000 000	0.002

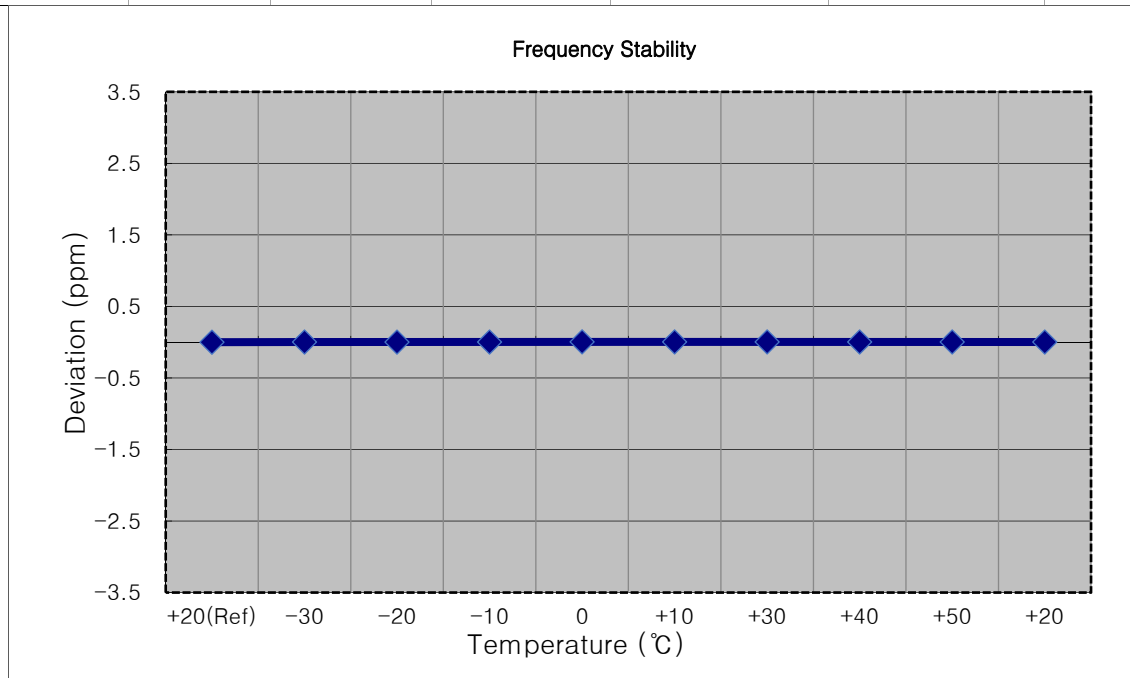


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	680 500 002	0.0	0.000 000	0.000
100 %		-30	680 500 005	2.8	0.000 000	0.004
100 %		-20	680 500 005	2.9	0.000 000	0.004
100 %		-10	680 500 005	2.6	0.000 000	0.004
100 %		0	680 500 004	2.1	0.000 000	0.003
100 %		+10	680 500 004	2.2	0.000 000	0.003
100 %		+30	680 500 004	2.3	0.000 000	0.003
100 %		+40	680 500 004	2.3	0.000 000	0.003
100 %		+50	680 500 005	3.1	0.000 000	0.005
Batt. Endpoint	3.300	+20	680 500 004	2.3	0.000 000	0.003

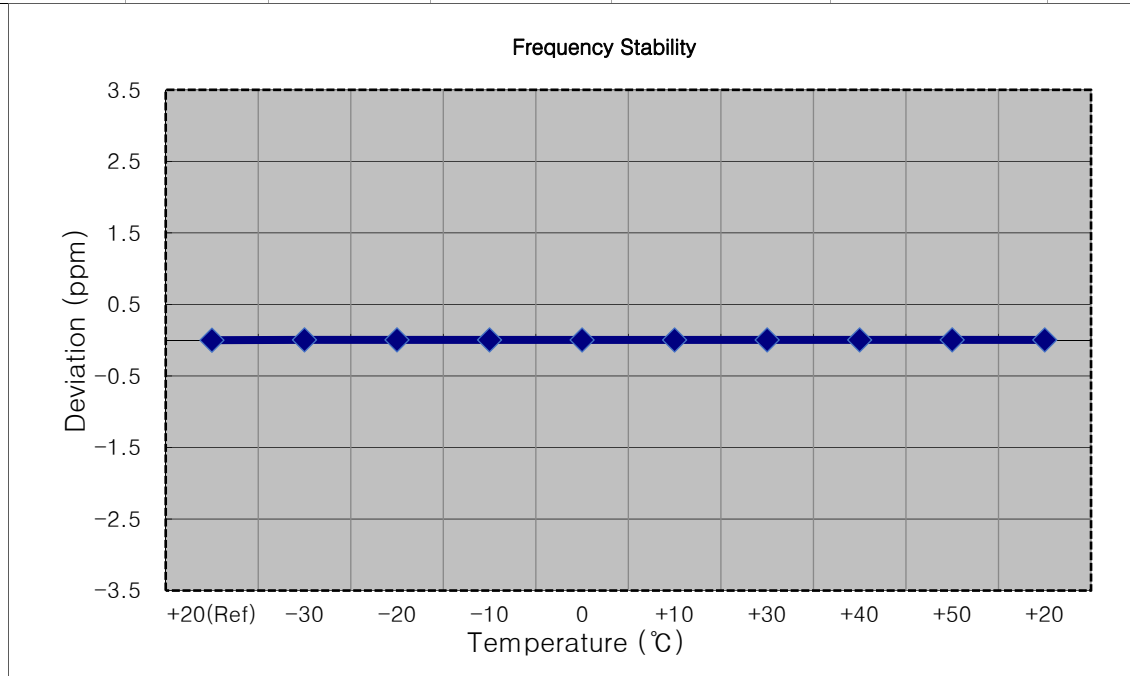


MODE:	<u>LTE B71</u>
OPERATING FREQUENCY:	<u>695,500,000 Hz</u>
CHANNEL:	<u>133447 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.900 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	695 500 003	0.0	0.000 000	0.000
100 %		-30	695 500 005	2.5	0.000 000	0.004
100 %		-20	695 500 001	-2.0	0.000 000	-0.003
100 %		-10	695 500 005	2.2	0.000 000	0.003
100 %		0	695 500 000	-2.7	0.000 000	-0.004
100 %		+10	695 500 006	3.1	0.000 000	0.004
100 %		+30	695 500 005	2.8	0.000 000	0.004
100 %		+40	695 500 005	2.5	0.000 000	0.004
100 %		+50	695 500 005	2.3	0.000 000	0.003
Batt. Endpoint	3.300	+20	695 500 001	-1.8	0.000 000	-0.003

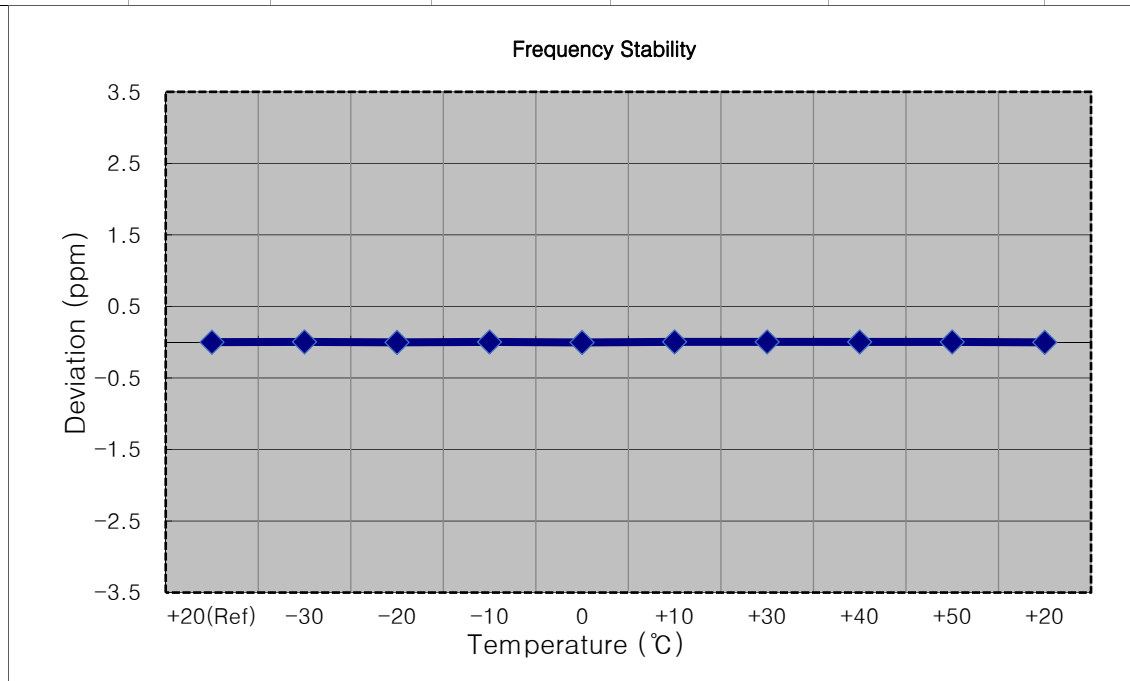


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 693,000,000 Hz
- ▣ CHANNEL: 133422 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	692 999 999	0.0	0.000 000	0.000
100 %		-30	692 999 996	-2.4	0.000 000	-0.003
100 %		-20	693 000 001	2.0	0.000 000	0.003
100 %		-10	693 000 001	1.8	0.000 000	0.003
100 %		0	693 000 000	1.7	0.000 000	0.002
100 %		+10	693 000 000	1.2	0.000 000	0.002
100 %		+30	693 000 001	1.8	0.000 000	0.003
100 %		+40	693 000 002	3.2	0.000 000	0.005
100 %		+50	693 000 001	2.3	0.000 000	0.003
Batt. Endpoint	3.300	+20	693 000 001	1.8	0.000 000	0.003

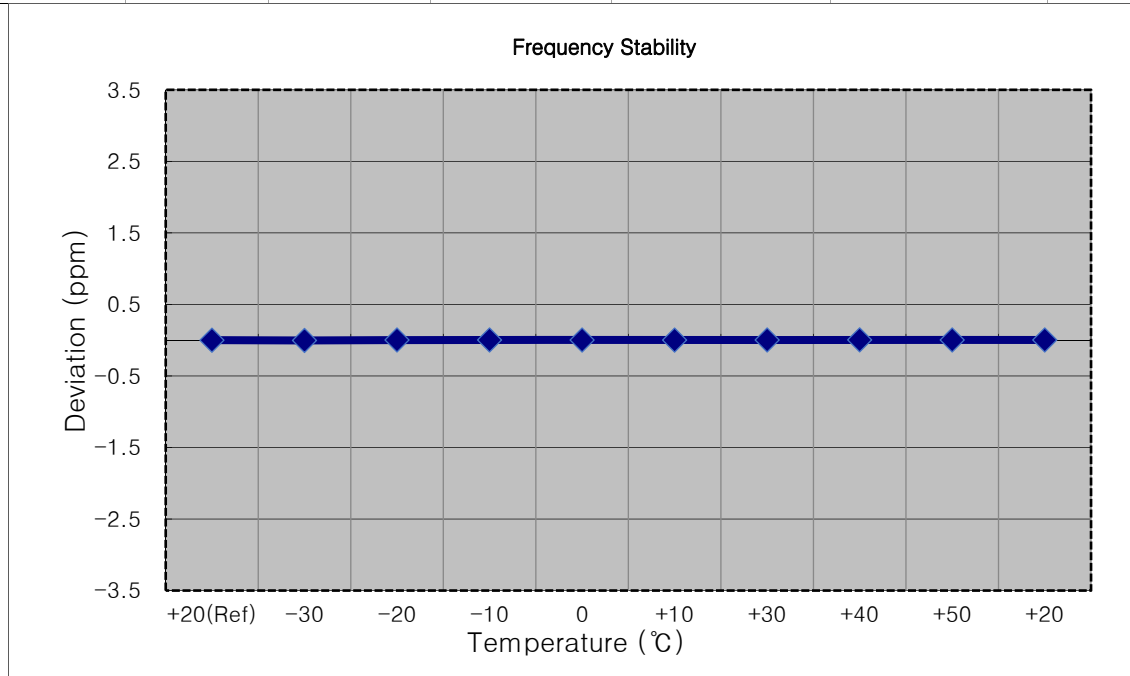


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 690,500,000 Hz
- ▣ CHANNEL: 133397 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	690 500 002	0.0	0.000 000	0.000
100 %		-30	690 500 004	2.1	0.000 000	0.003
100 %		-20	690 500 004	1.7	0.000 000	0.002
100 %		-10	690 500 003	1.3	0.000 000	0.002
100 %		0	690 500 004	2.0	0.000 000	0.003
100 %		+10	690 500 005	2.5	0.000 000	0.004
100 %		+30	690 500 000	-1.6	0.000 000	-0.002
100 %		+40	690 500 000	-1.9	0.000 000	-0.003
100 %		+50	690 500 004	2.3	0.000 000	0.003
Batt. Endpoint	3.300	+20	690 500 004	2.2	0.000 000	0.003

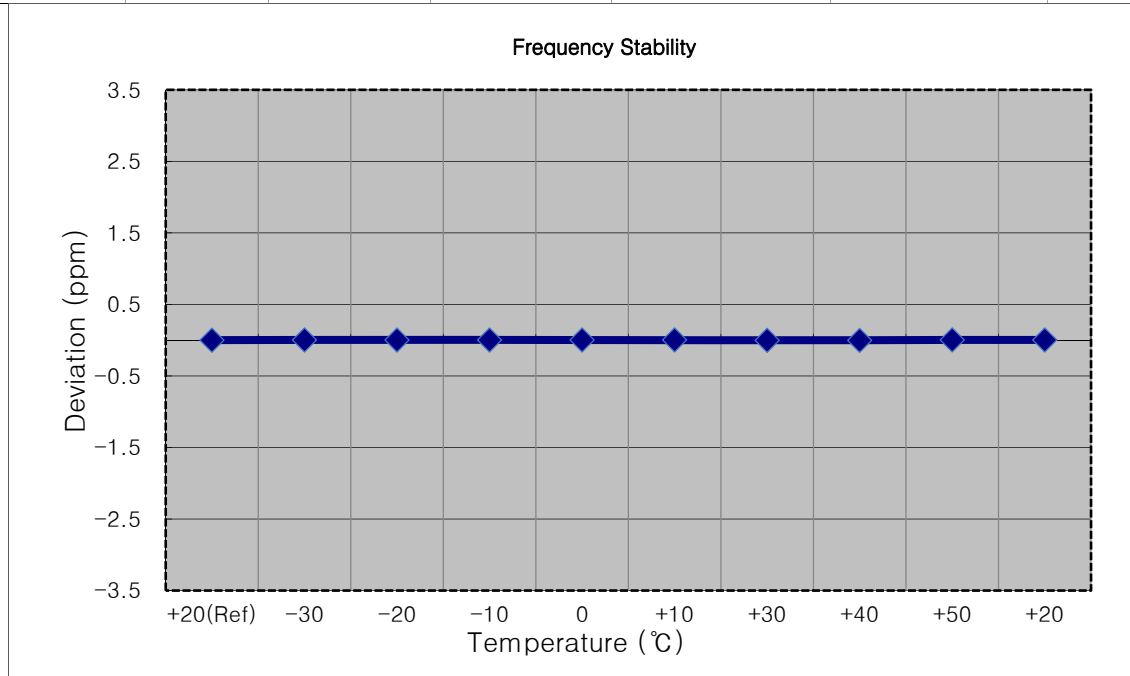


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 688,000,000 Hz
- ▣ CHANNEL: 133372 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.900 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	3.900	+20(Ref)	688 000 002	0.0	0.000 000	0.000
100 %		-30	688 000 004	2.2	0.000 000	0.003
100 %		-20	688 000 004	2.0	0.000 000	0.003
100 %		-10	688 000 004	2.0	0.000 000	0.003
100 %		0	688 000 004	2.1	0.000 000	0.003
100 %		+10	688 000 000	-2.2	0.000 000	-0.003
100 %		+30	688 000 004	2.3	0.000 000	0.003
100 %		+40	688 000 004	1.7	0.000 000	0.002
100 %		+50	688 000 000	-1.8	0.000 000	-0.003
Batt. Endpoint	3.300	+20	688 000 004	1.4	0.000 000	0.002

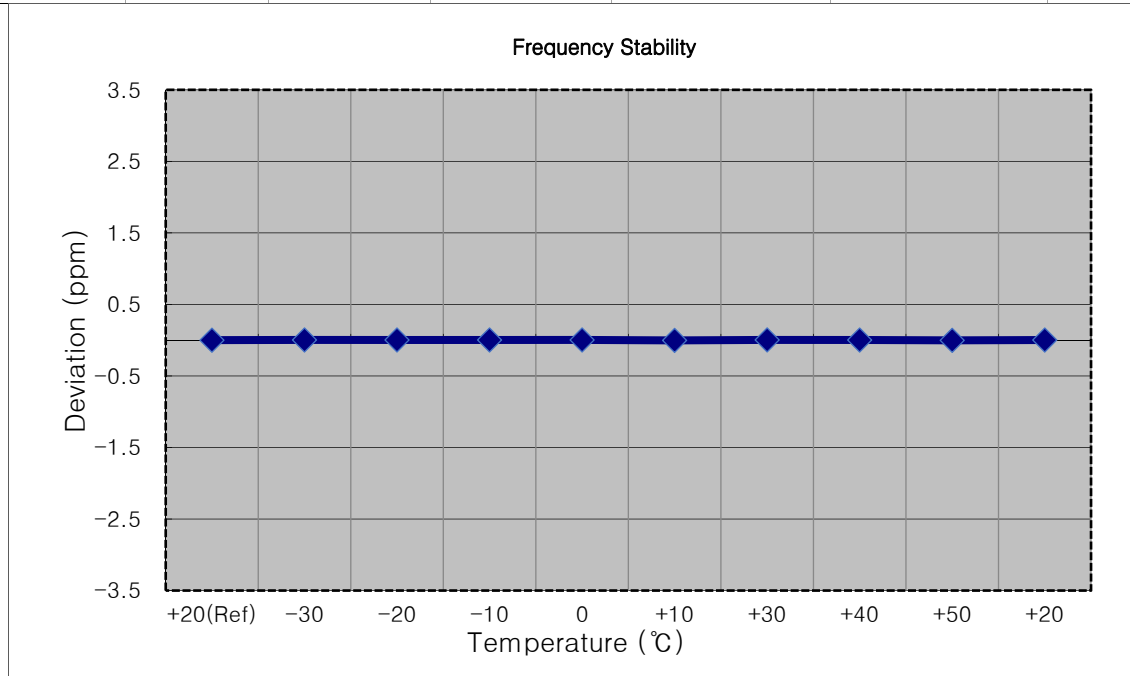


10. TEST PLOTS(Main 1 ANT)


LTE B71_5 M_PAR_Mid_QPSK_FullRB

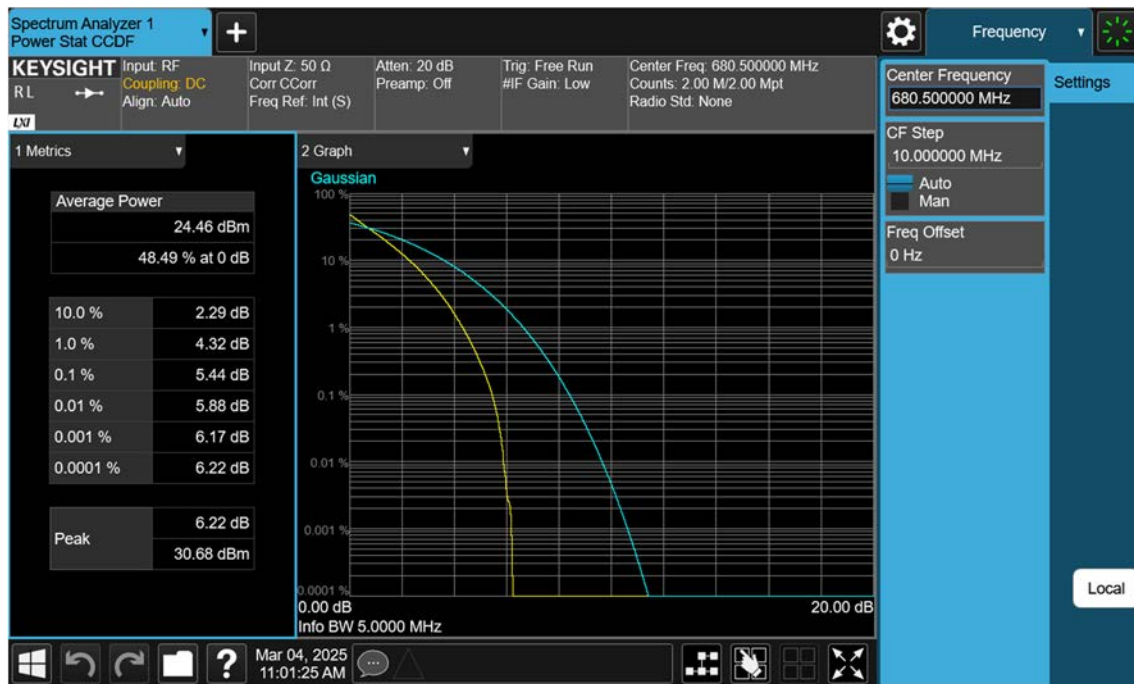


LTE B71_5 M_PAR_Mid_16QAM_FullRB

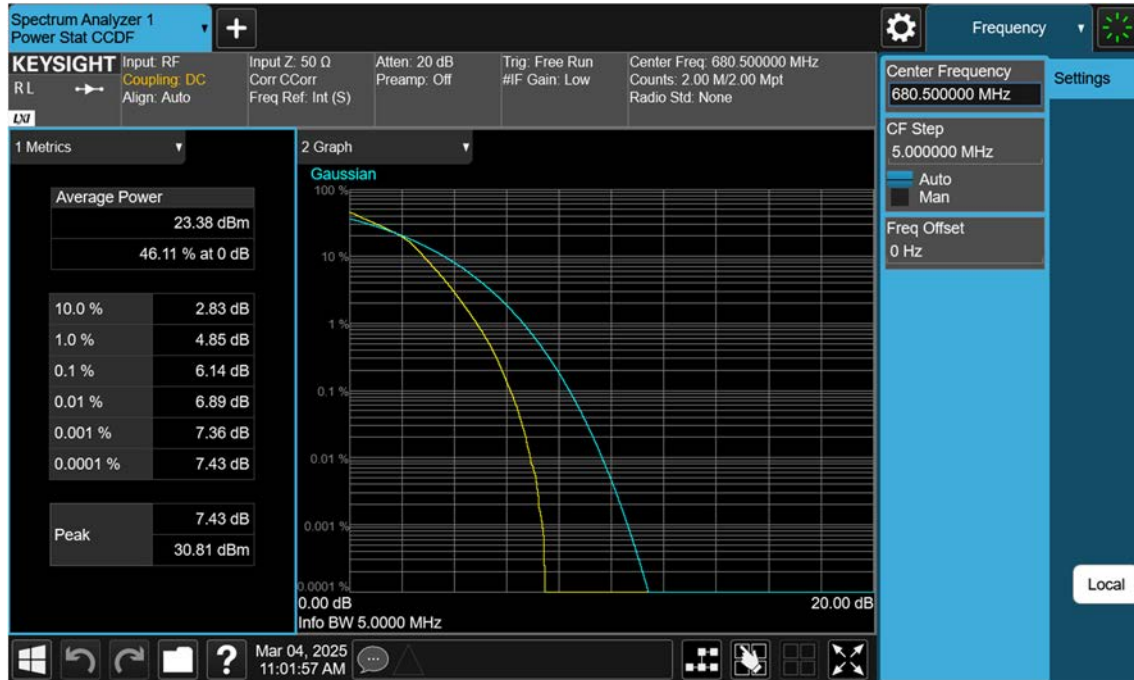


LTE B71_5 M_PAR_Mid_64QAM_FullRB

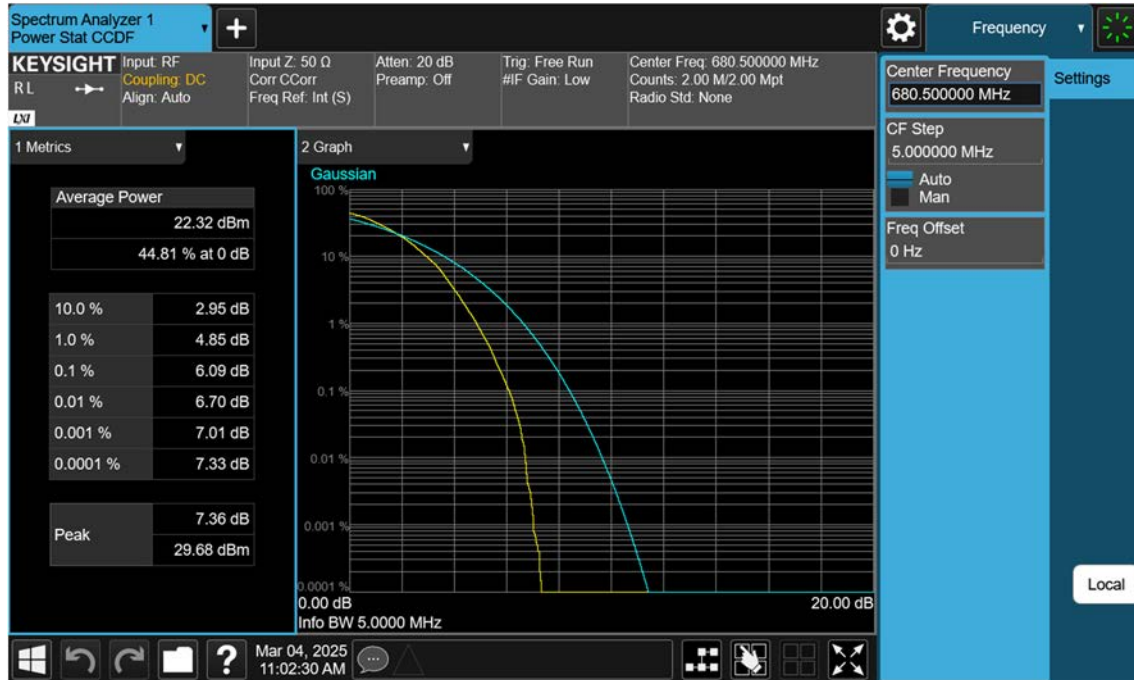


LTE B71_5 M_PAR_Mid_256QAM_FullRB

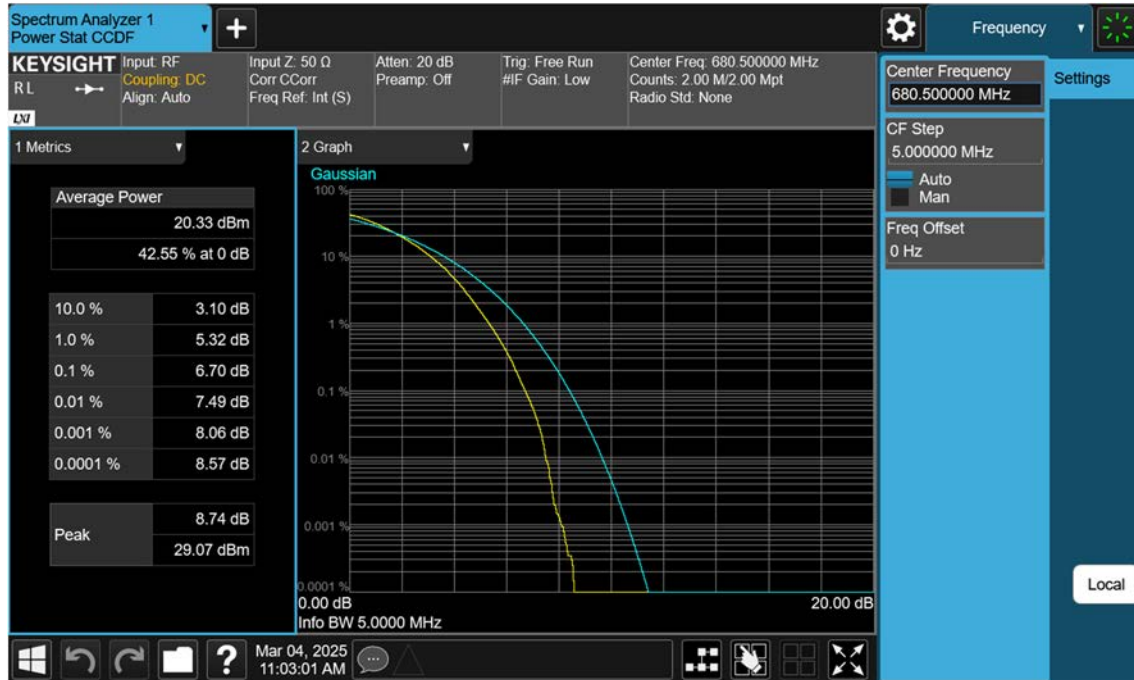


LTE B71_10 M_PAR_Mid_QPSK_FullRB

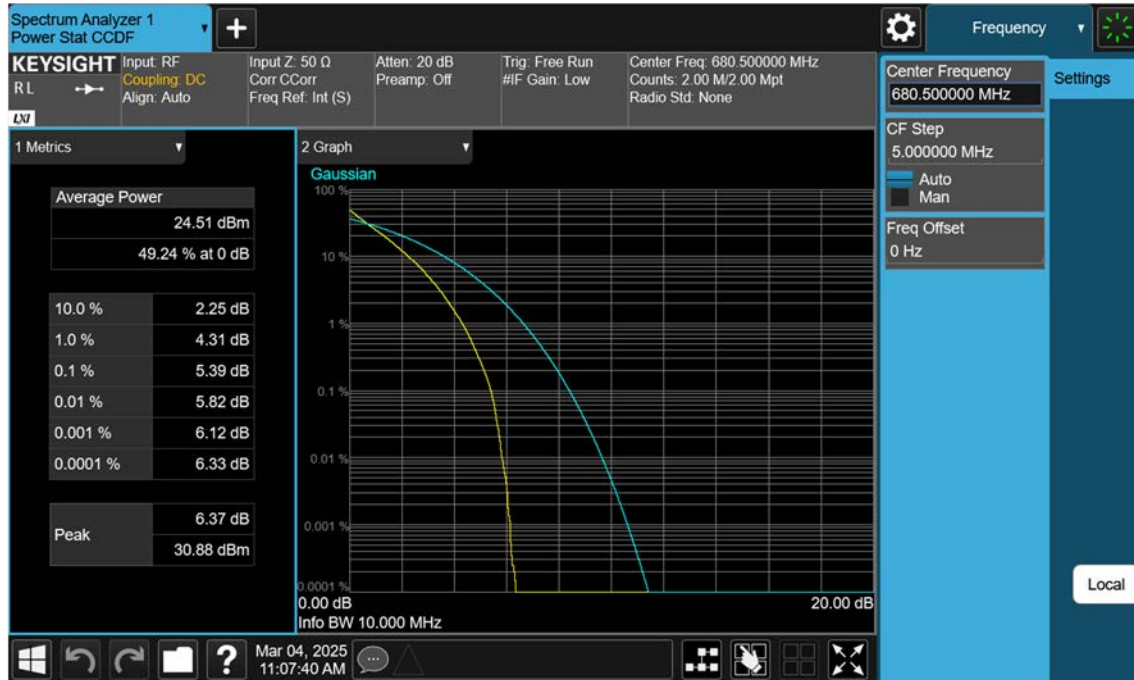

LTE B71_10 M_PAR_Mid_16QAM_FullRB

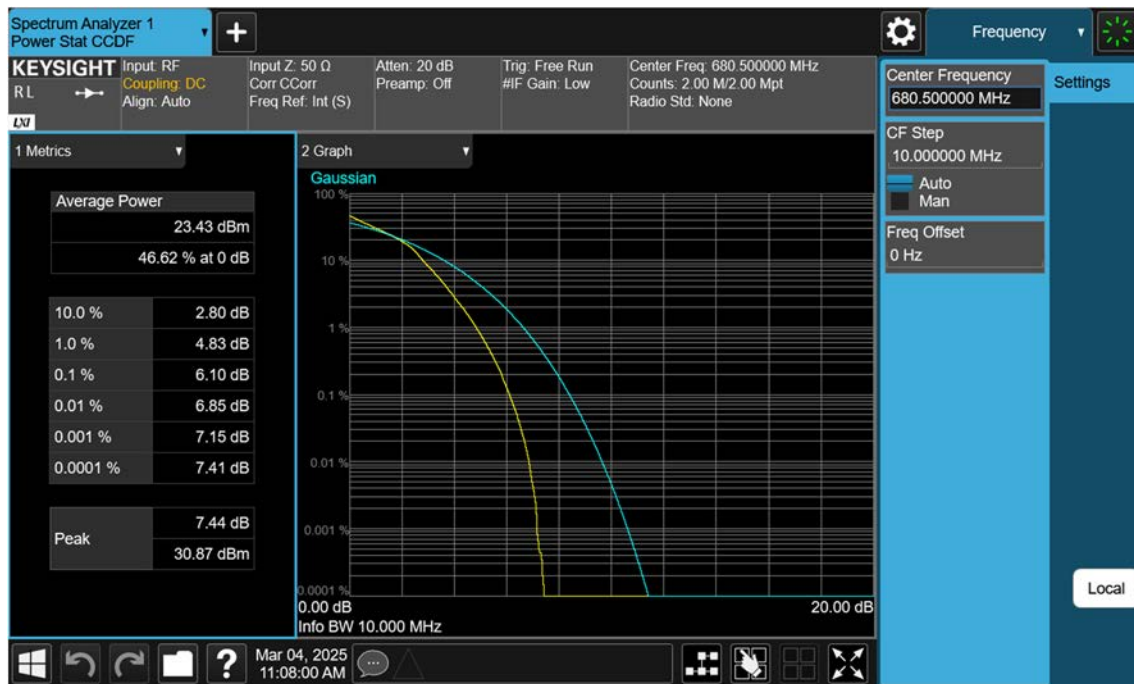


LTE B71_10 M_PAR_Mid_64QAM_FullRB

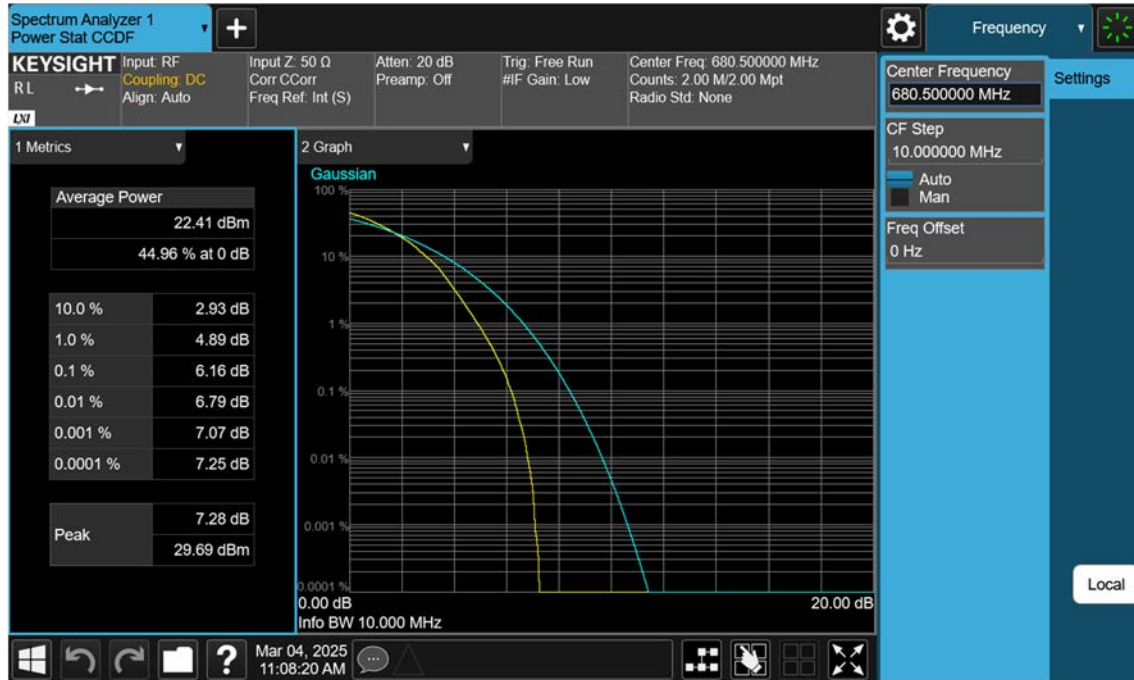


LTE B71_10 M_PAR_Mid_256QAM_FullRB




LTE B71_15 M_PAR_Mid_QPSK_FullRB

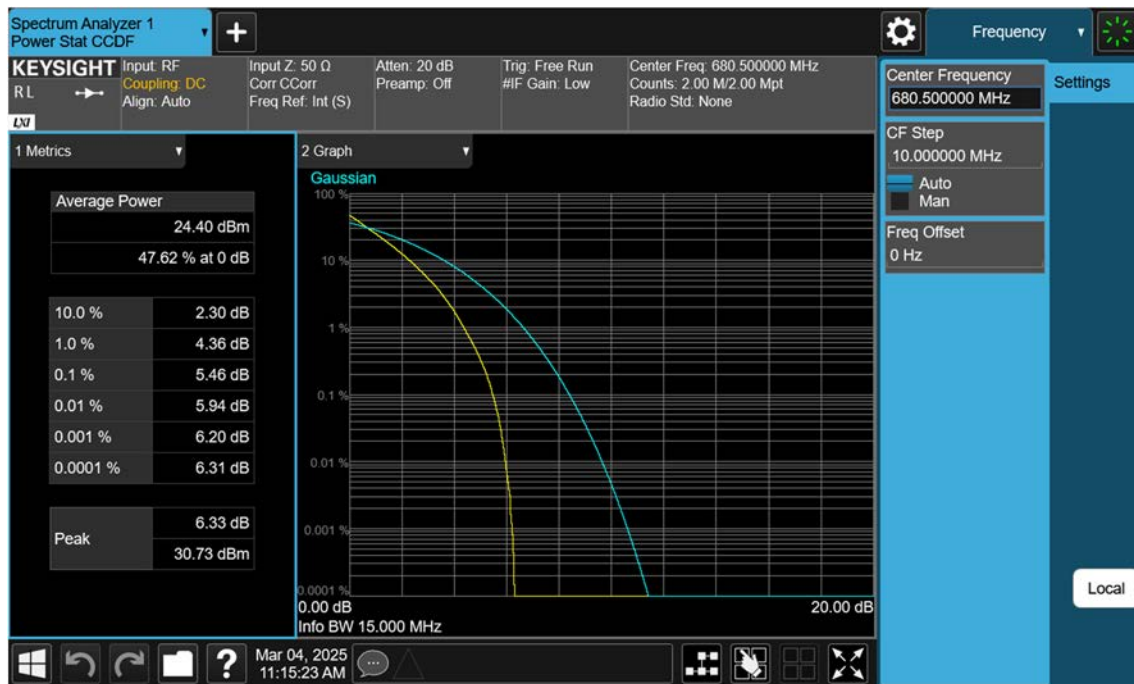

LTE B71_15 M_PAR_Mid_16QAM_FullRB

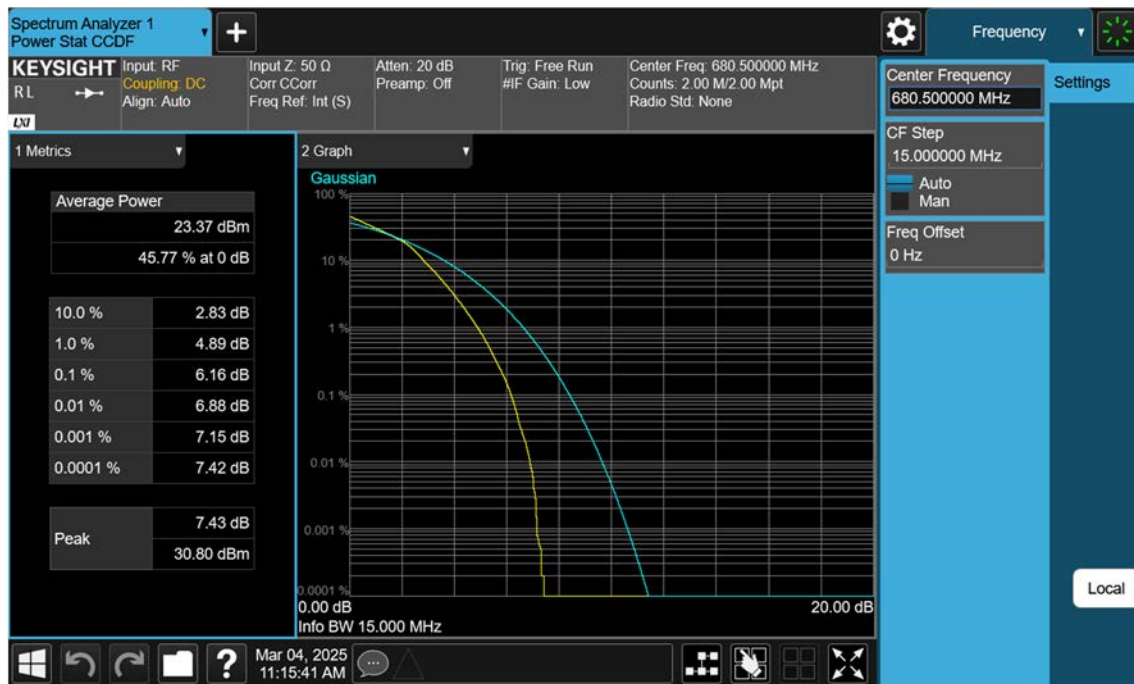


LTE B71_15 M_PAR_Mid_64QAM_FullRB

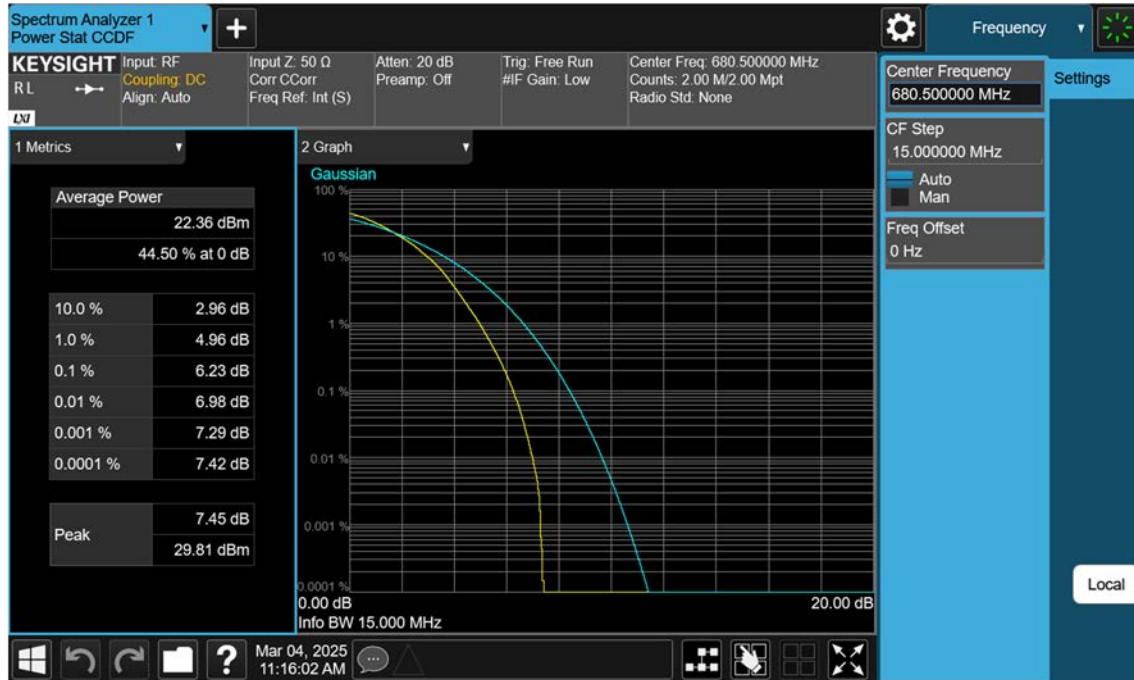


LTE B71_15 M_PAR_Mid_256QAM_FullRB



LTE B71_20 M_PAR_Mid_QPSK_FullRB

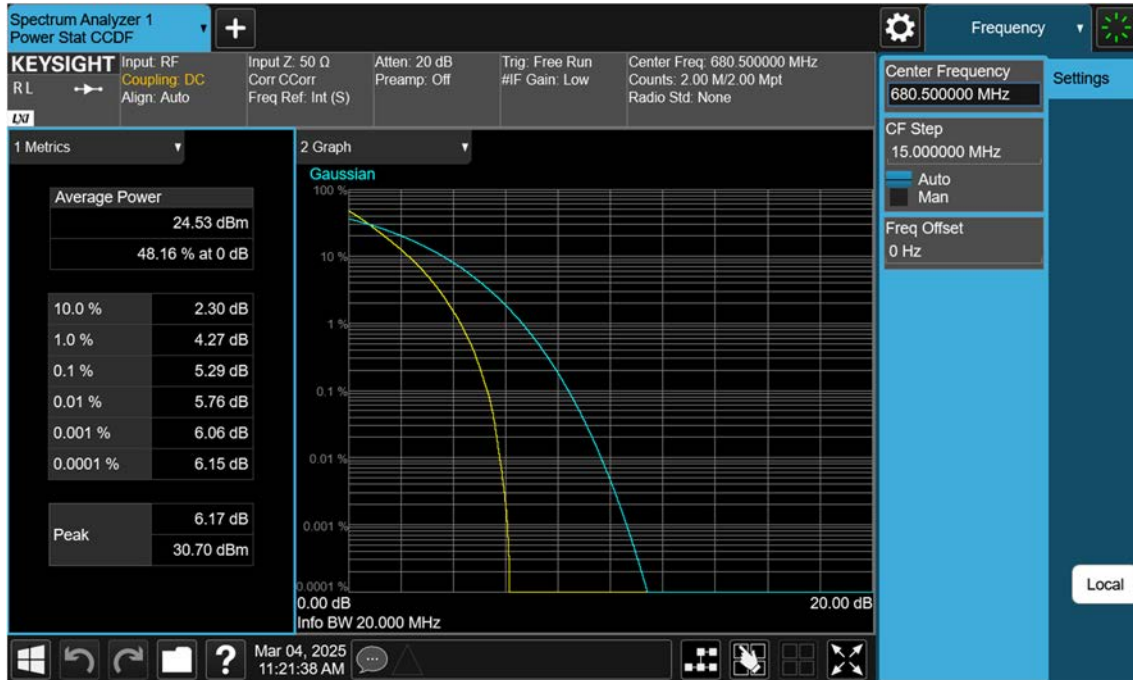


LTE B71_20 M_PAR_Mid_16QAM_FullRB

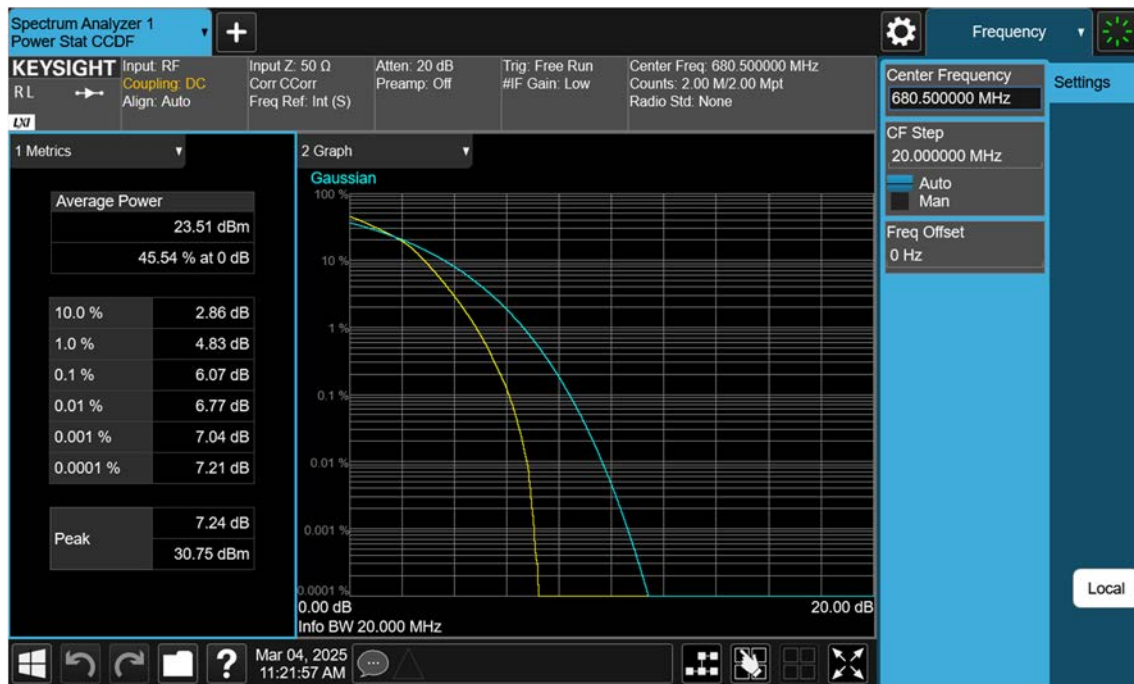


LTE B71_20 M_PAR_Mid_64QAM_FullRB




LTE B71_20 M_PAR_Mid_256QAM_FullRB

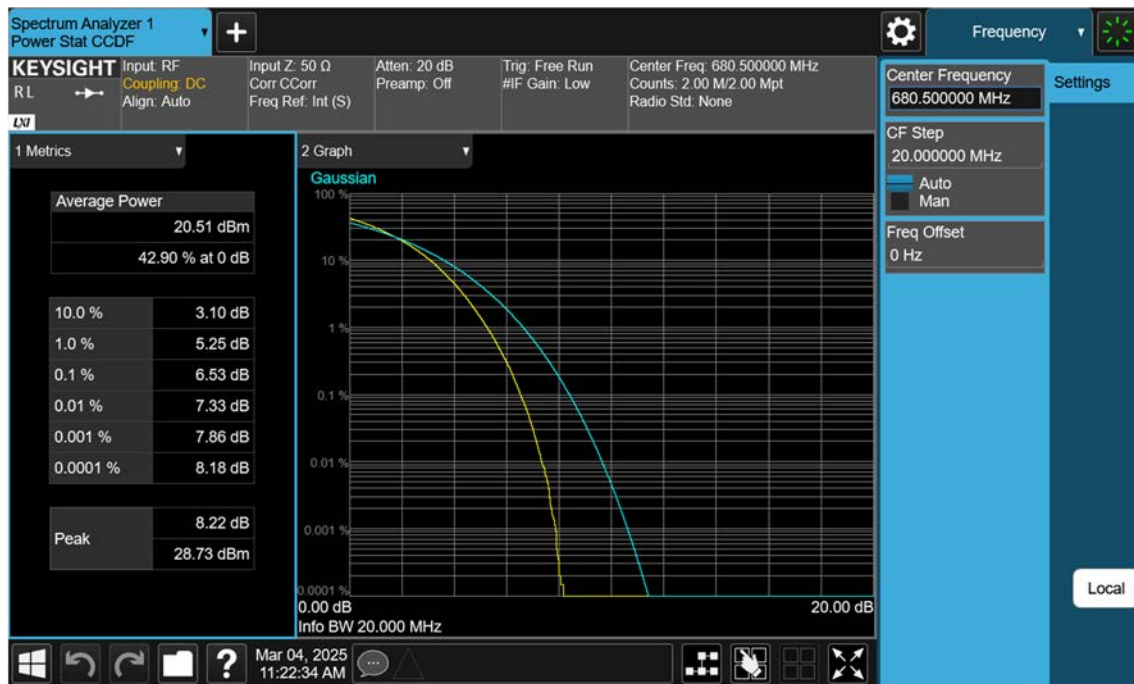


LTE B71_5 M_OBW_Mid_QPSK_FullRB

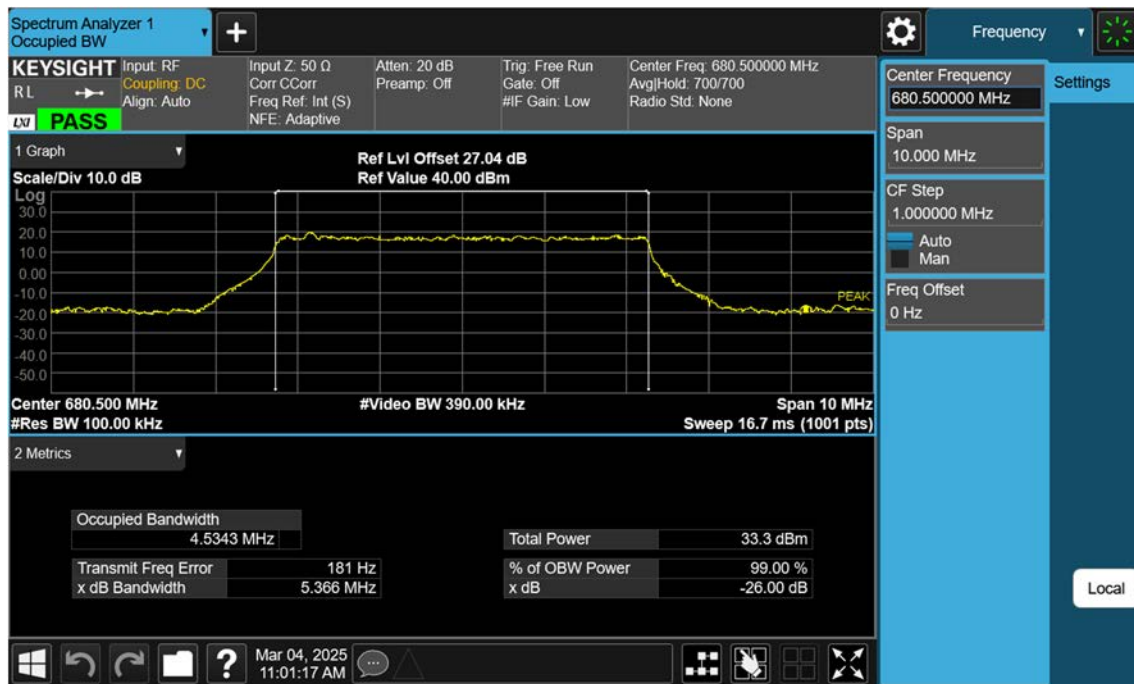


LTE B71_5 M_OBW_Mid_16QAM_FullRB

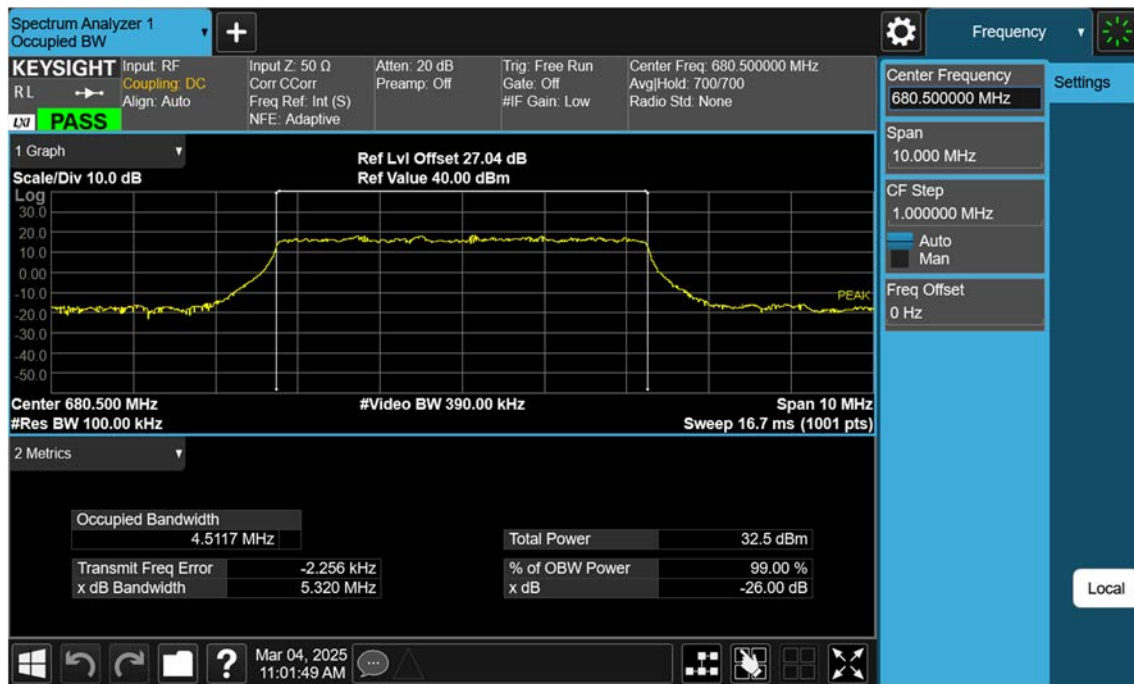


LTE B71_5 M_OBW_Mid_64QAM_FullRB

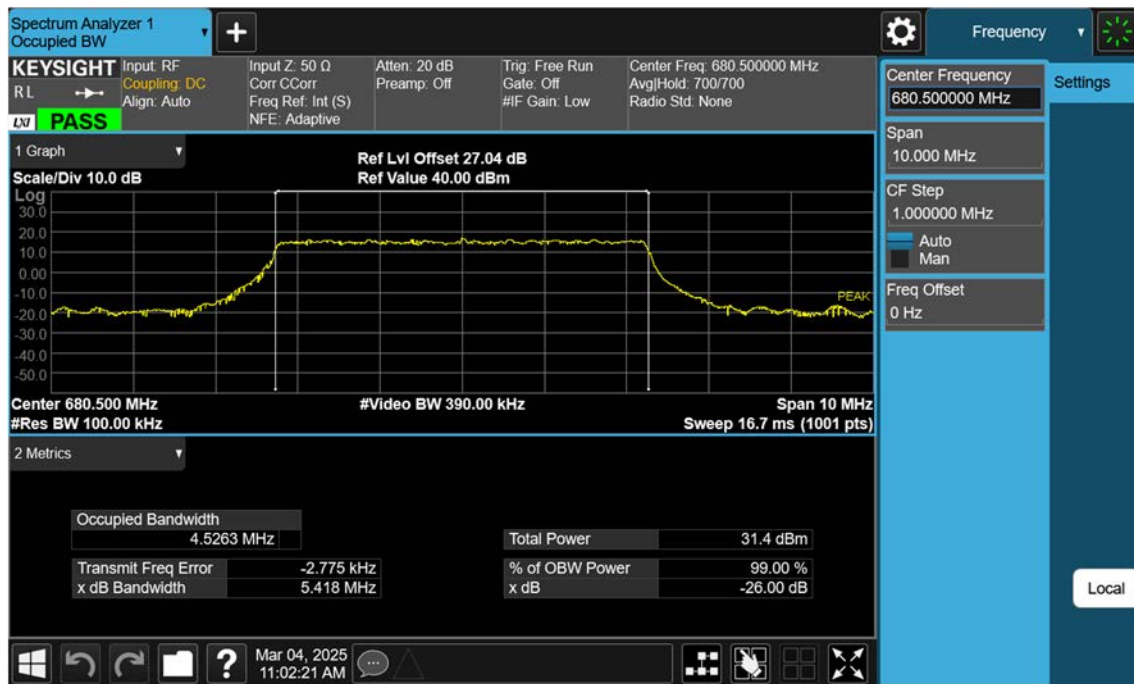


LTE B71_5 M_OBW_Mid_256QAM_FullRB

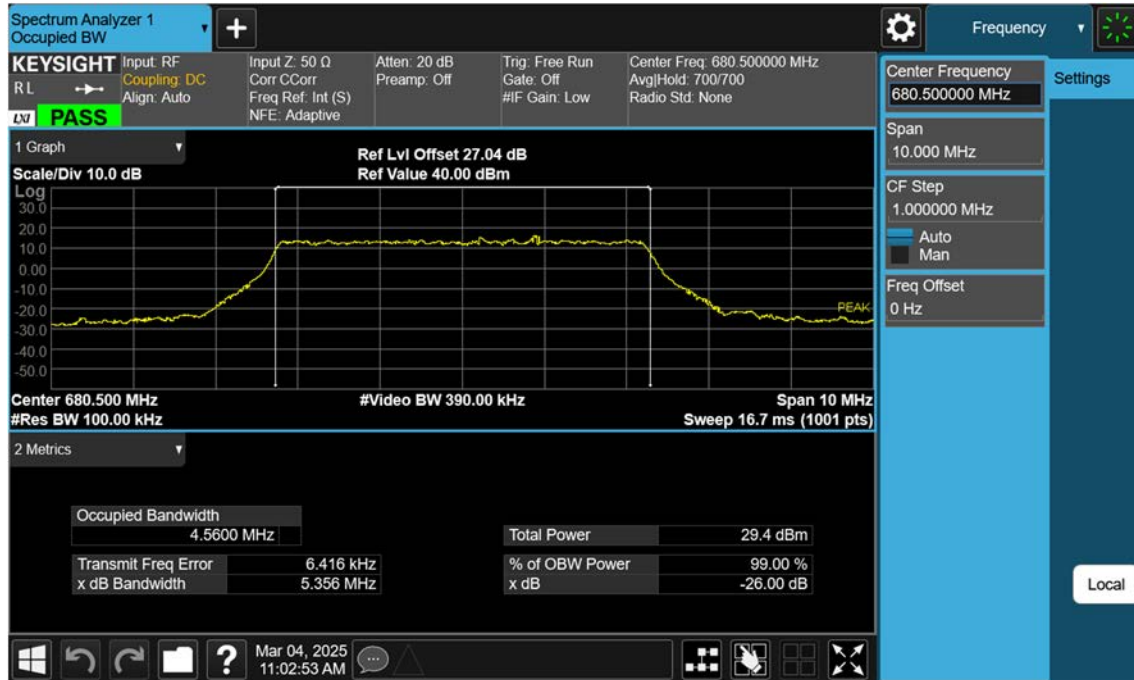


LTE B71_10 M_OBW_Mid_QPSK_FullRB

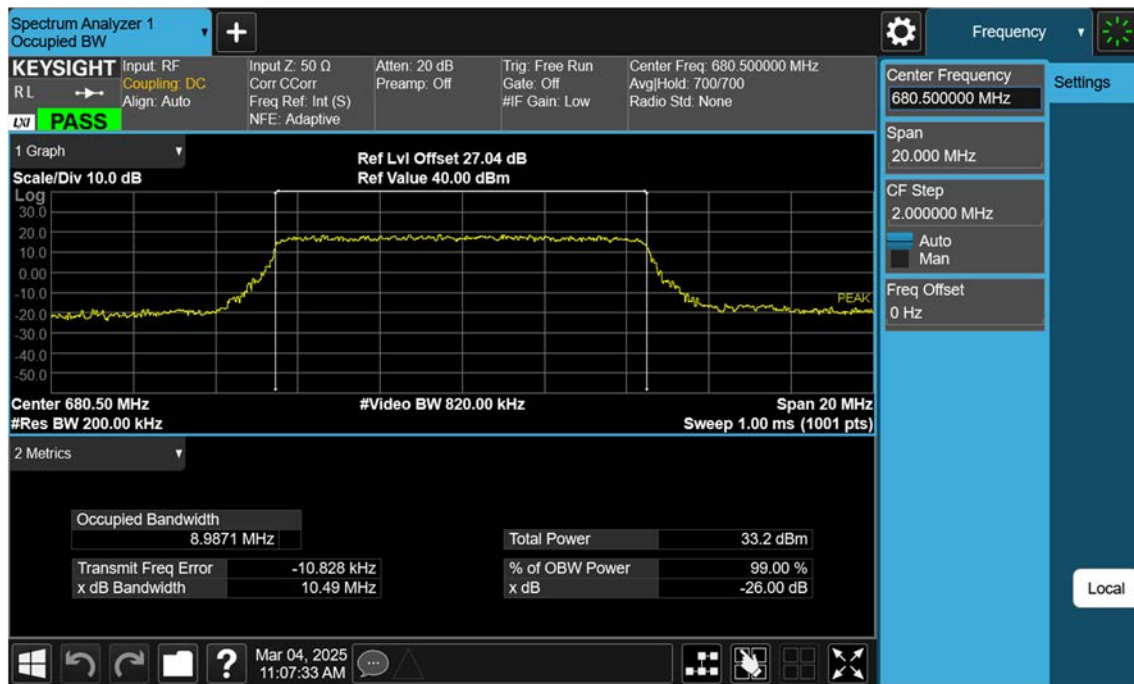


LTE B71_10 M_OBW_Mid_16QAM_FullRB

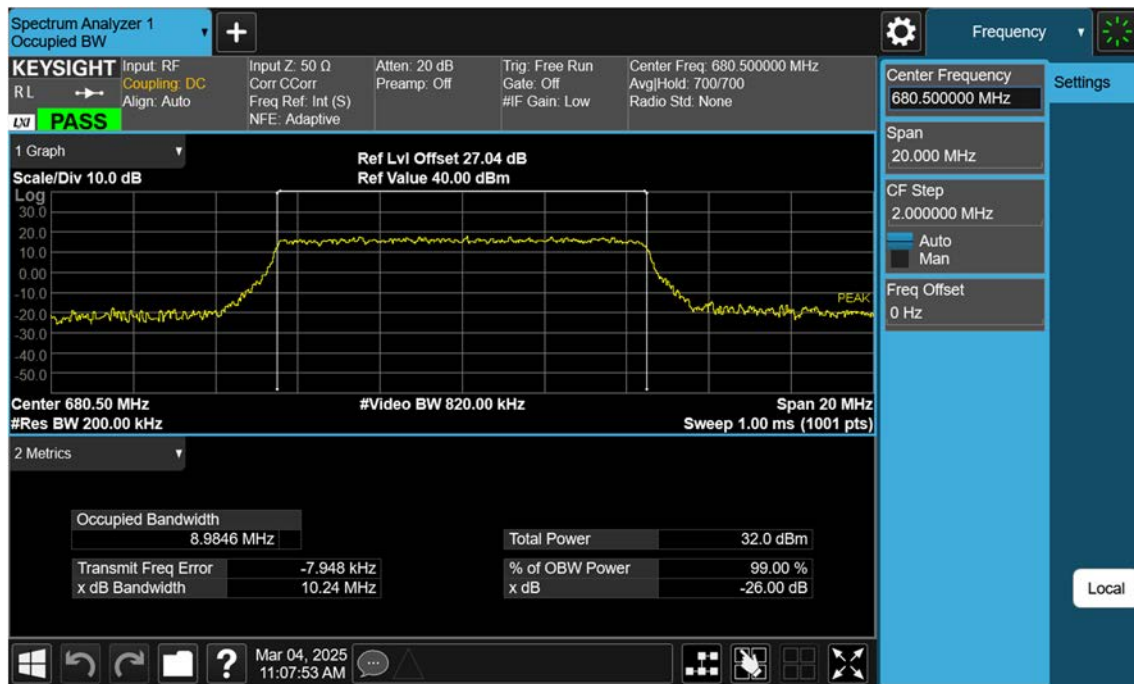


LTE B71_10 M_OBW_Mid_64QAM_FullRB

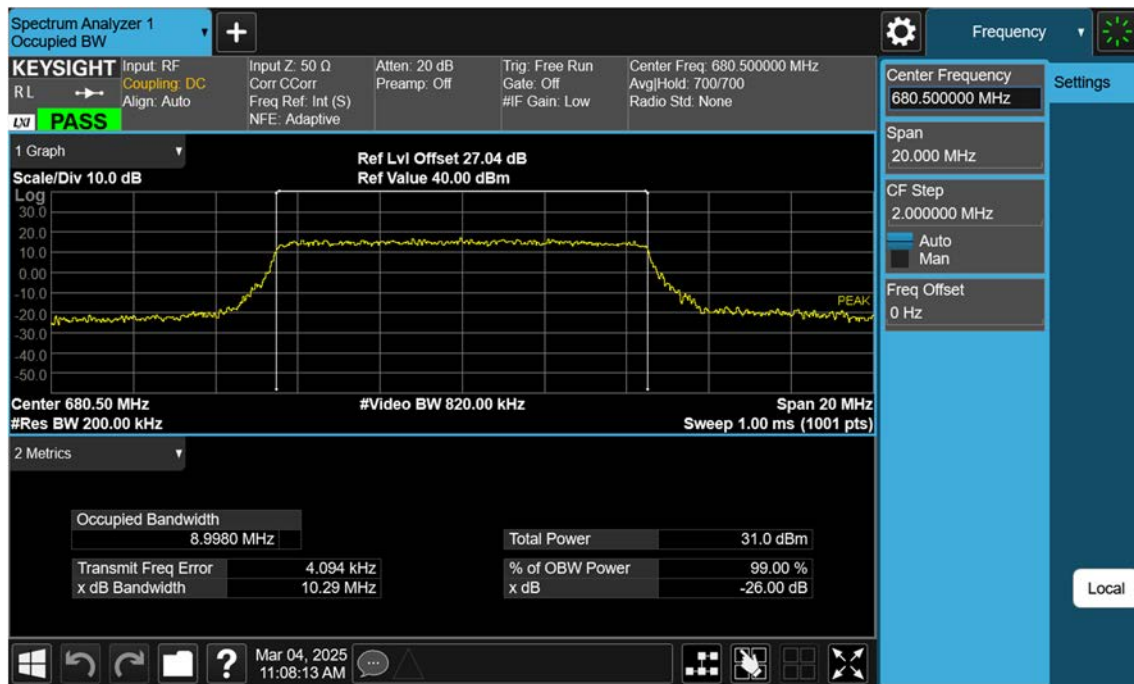


LTE B71_10 M_OBW_Mid_256QAM_FullRB

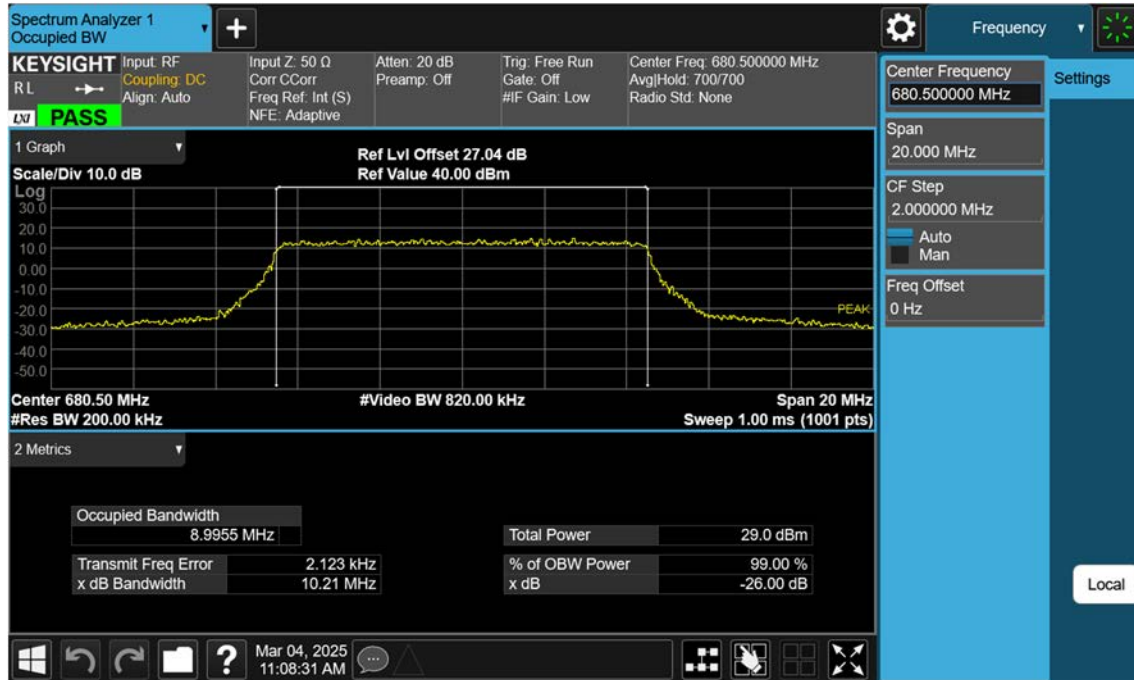


LTE B71_15 M_OBW_Mid_QPSK_FullRB

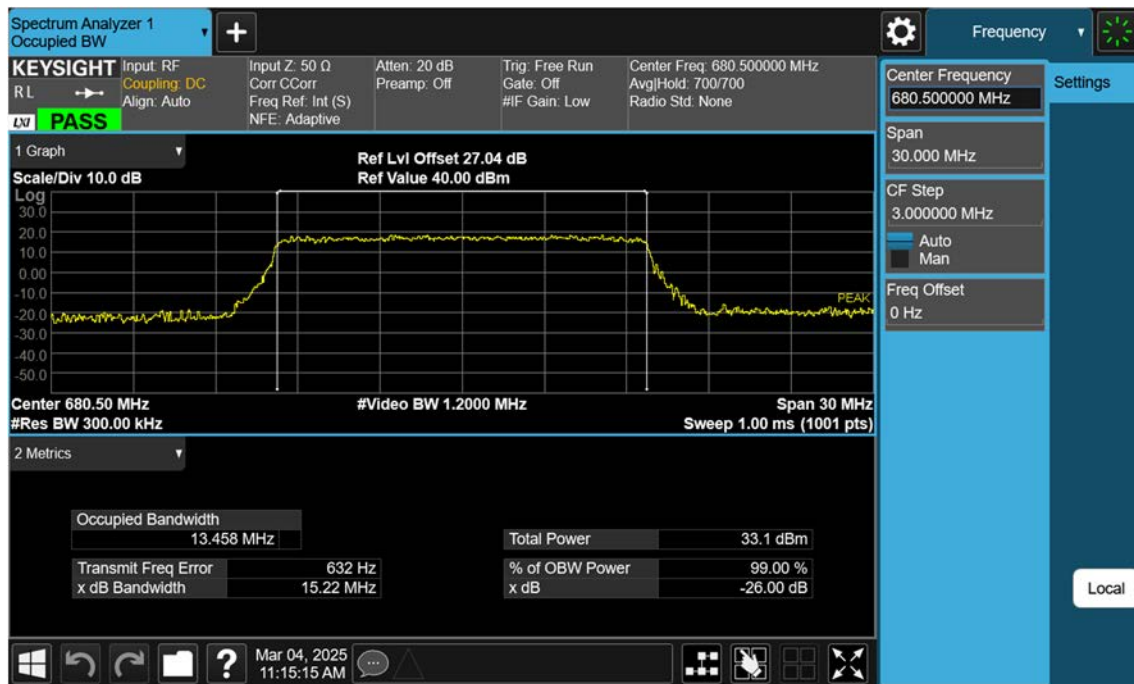

LTE B71_15 M_OBW_Mid_16QAM_FullRB

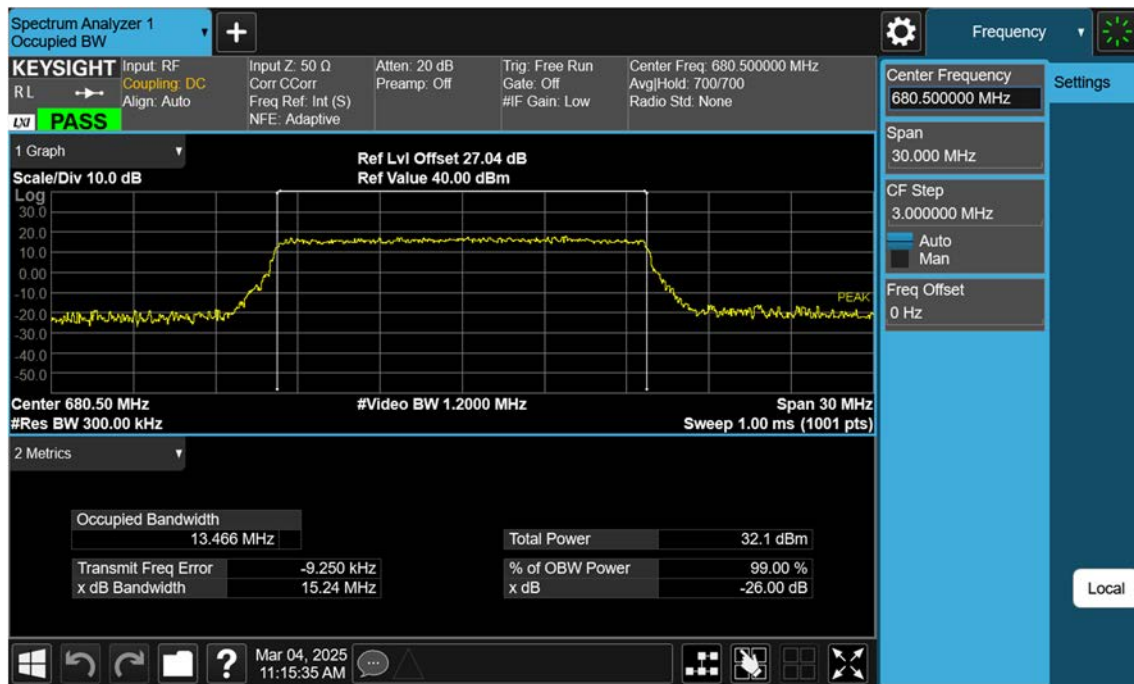


LTE B71_15 M_OBW_Mid_64QAM_FullRB

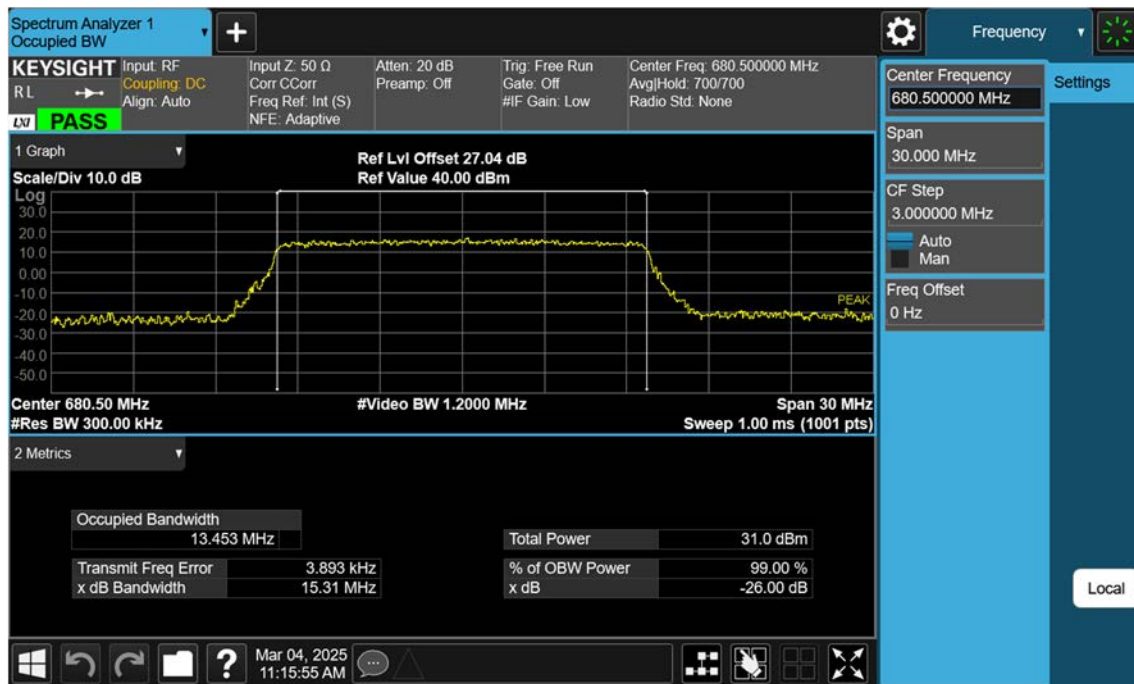


LTE B71_15 M_OBW_Mid_256QAM_FullRB



LTE B71_20 M_OBW_Mid_QPSK_FullRB

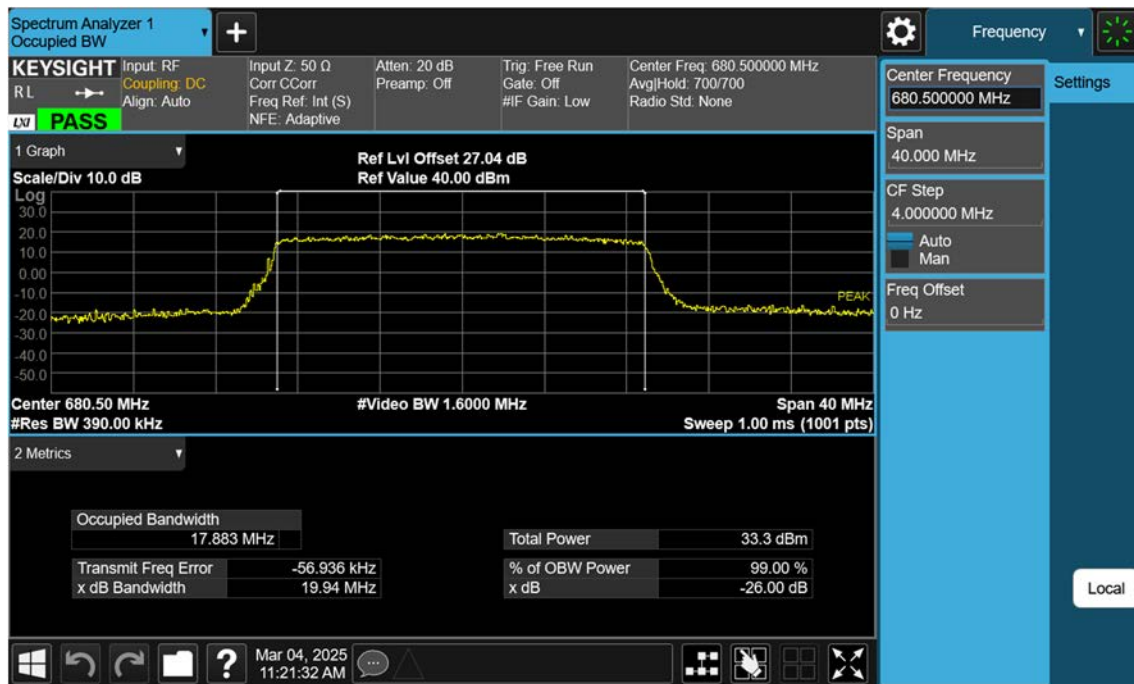

LTE B71_20 M_OBW_Mid_16QAM_FullRB

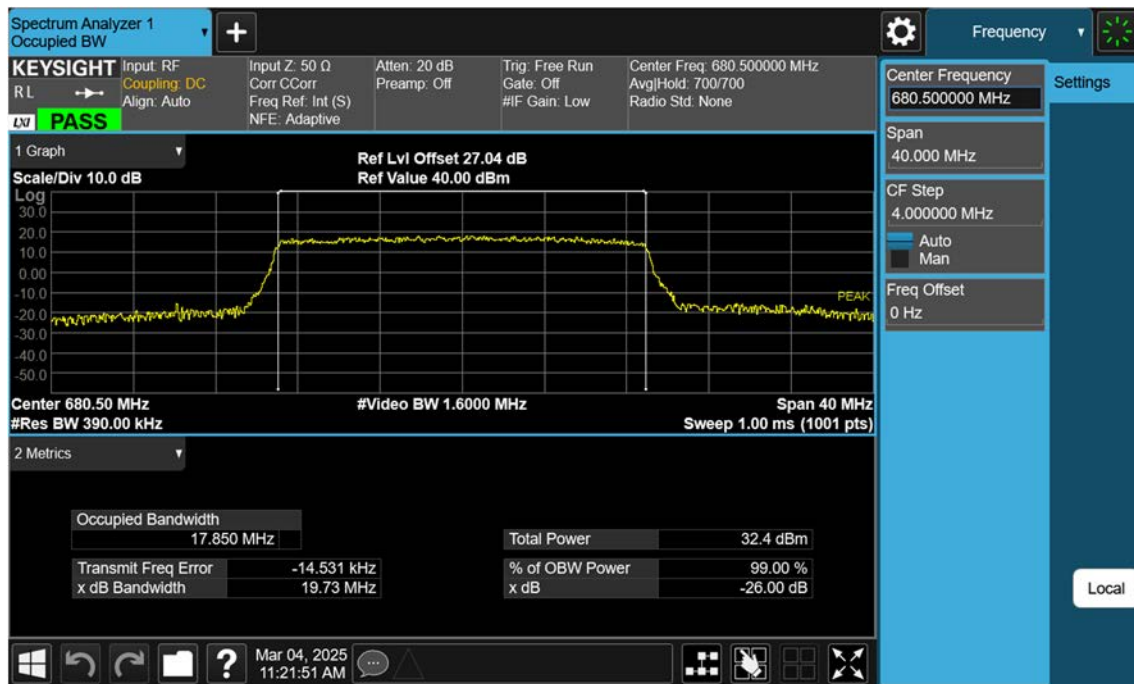


LTE B71_20 M_OBW_Mid_64QAM_FullRB



LTE B71_20 M_OBW_Mid_256QAM_FullRB




LTE B71_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

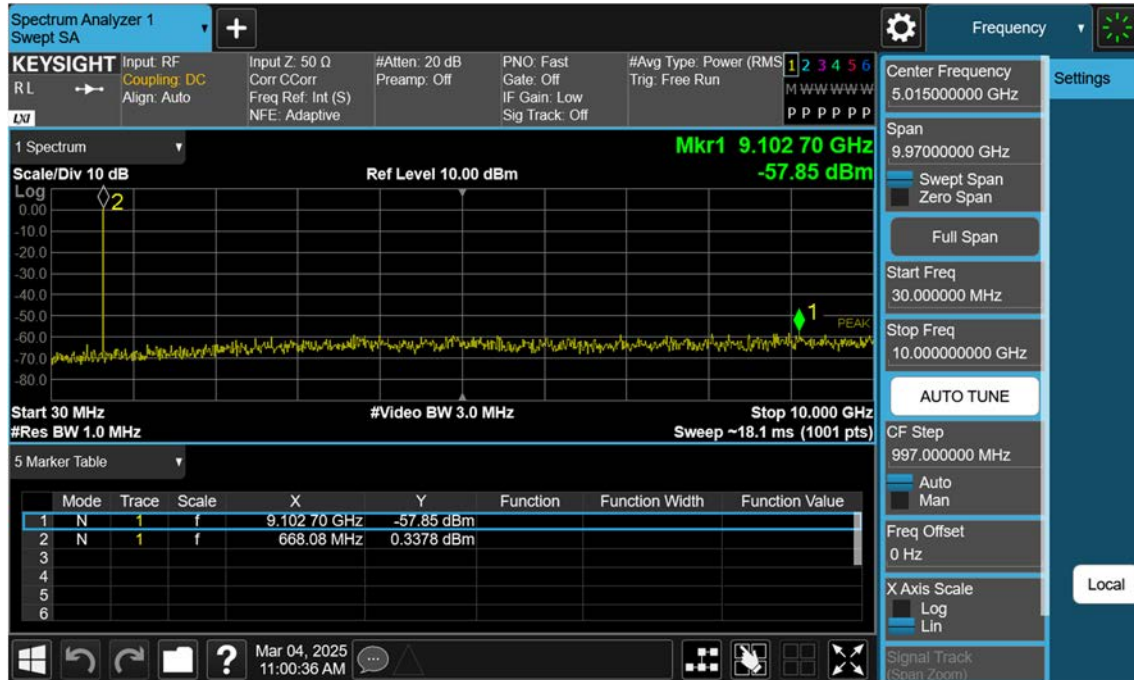

LTE B71_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB



LTE B71_5 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

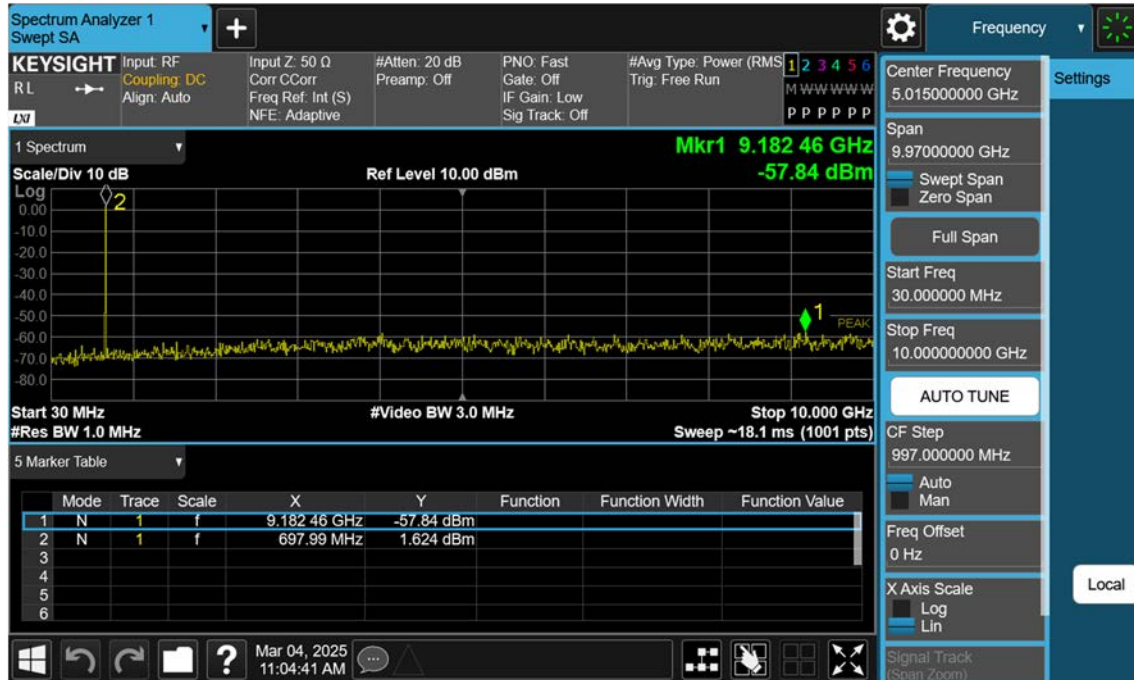

Spectrum Analyzer 1
Swept SA

KEYSIGHT Input: RF Coupling: DC Align: Auto
 R L Input Z: 50 Ω Corr: C Corr Freq Ref: Int (S) NFE: Adaptive
 #Atten: 20 dB Preamp: Off PNO: Fast Gate: Off IF Gain: Low Sig Track: Off
 #Avg Type: Power (RMS) 1 2 3 4 5 6 M WWW WWW P P P P P P

1 Spectrum
 Scale/Div 10 dB Ref Level 10.00 dBm
 Log
 0.00
 -10.0
 -20.0
 -30.0
 -40.0
 -50.0
 -60.0
 -70.0
 -80.0

Mkr1 8.594 23 GHz
 -58.35 dBm

Start 30 MHz #Res BW 1.0 MHz #Video BW 3.0 MHz Stop 10.000 GHz
 Sweep ~18.1 ms (1001 pts)


5 Marker Table

	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	1	f	8.594 23 GHz	-58.35 dBm			
2	N	1	f	668.08 MHz	1.737 dBm			
3								
4								
5								
6								


Center Frequency 5.015000000 GHz
 Span 9.970000000 GHz
 Swept Span
 Zero Span
 Full Span
 Start Freq 30.0000000 MHz
 Stop Freq 10.000000000 GHz
 AUTO TUNE
 CF Step 997.000000 MHz
 Auto
 Man
 Freq Offset 0 Hz
 X Axis Scale
 Log
 Lin
 Signal Track (Span Zoom)

Mar 04, 2025 11:07:03 AM


LTE B71_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

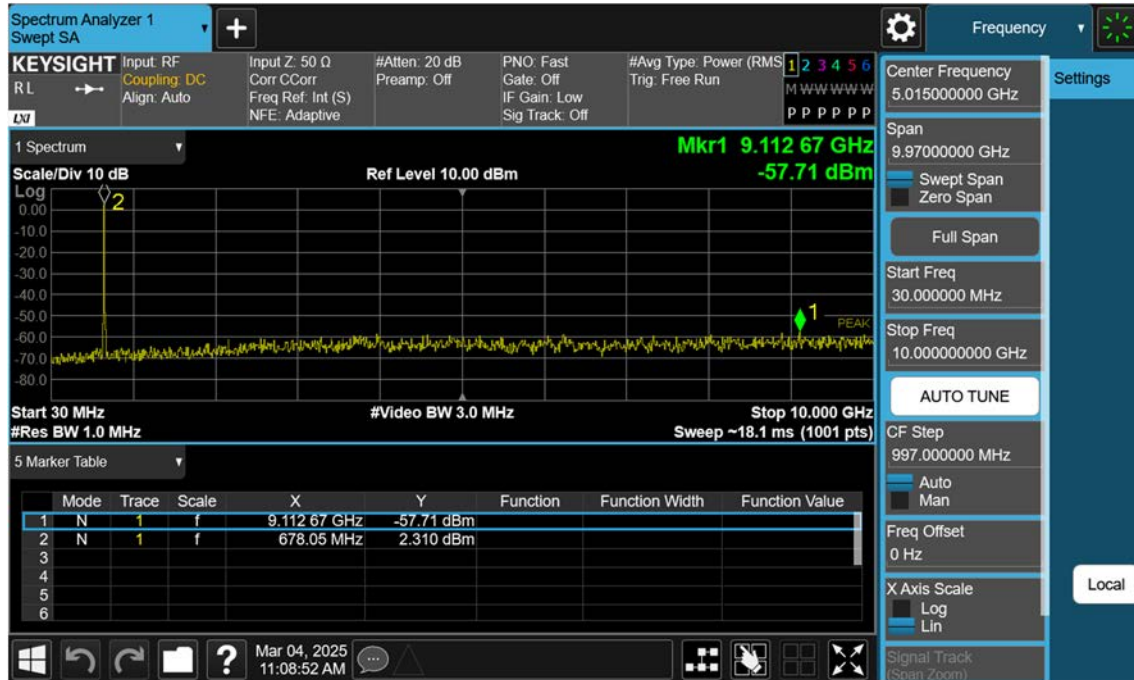


LTE B71_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

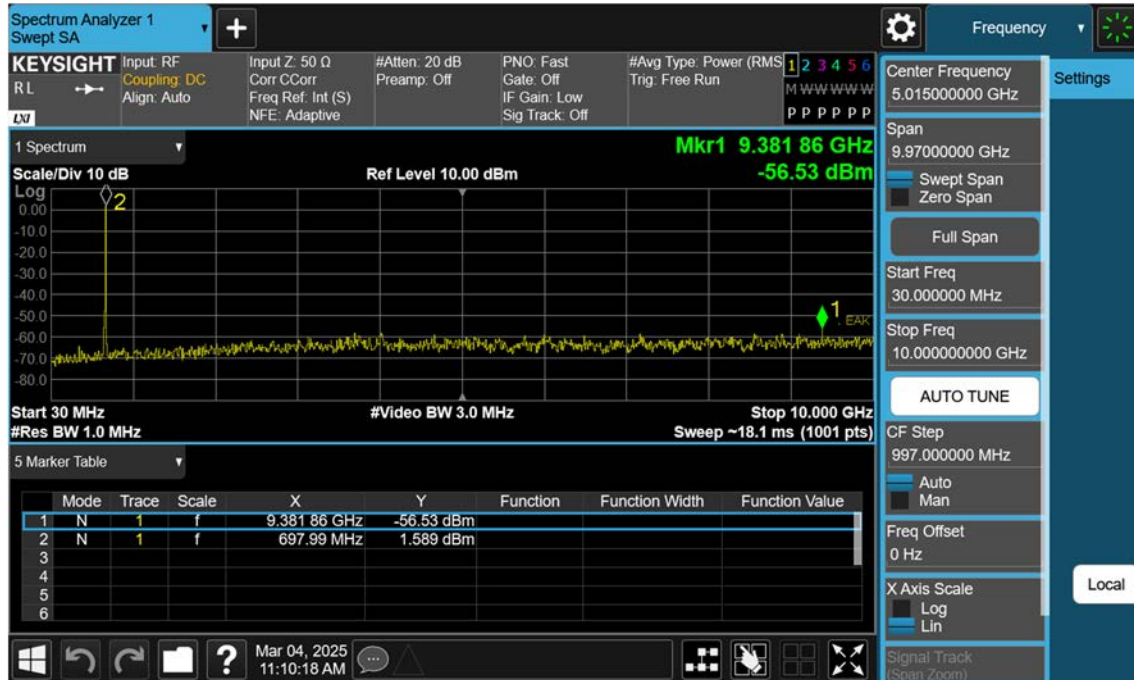


LTE B71_15 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

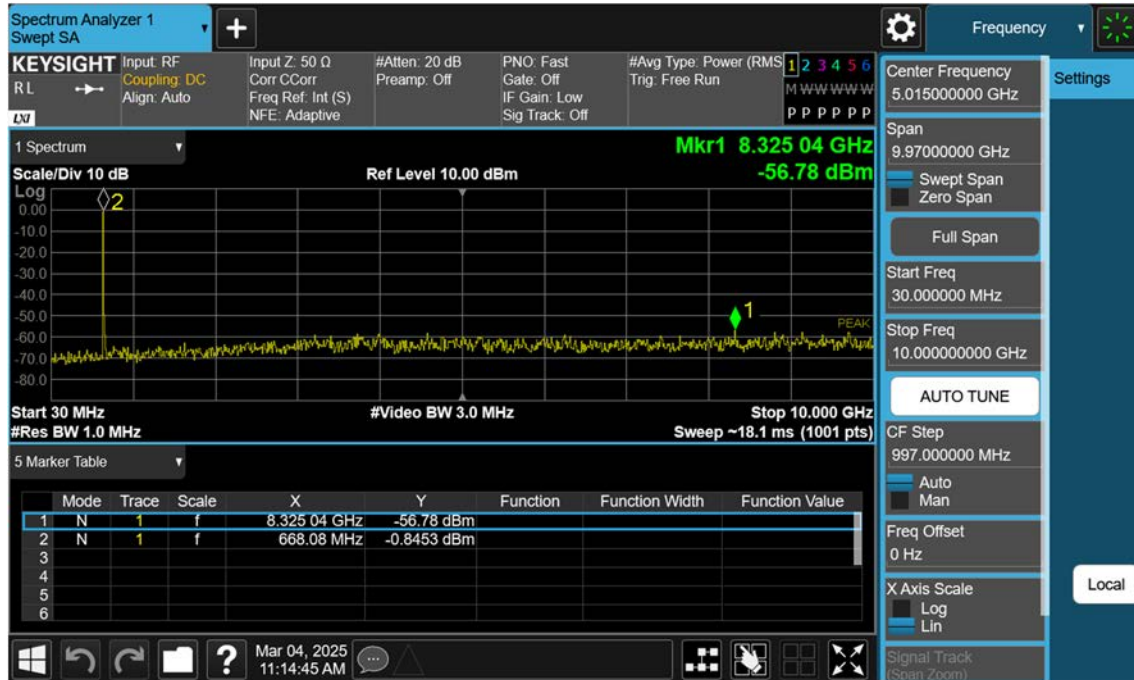


LTE B71_15 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

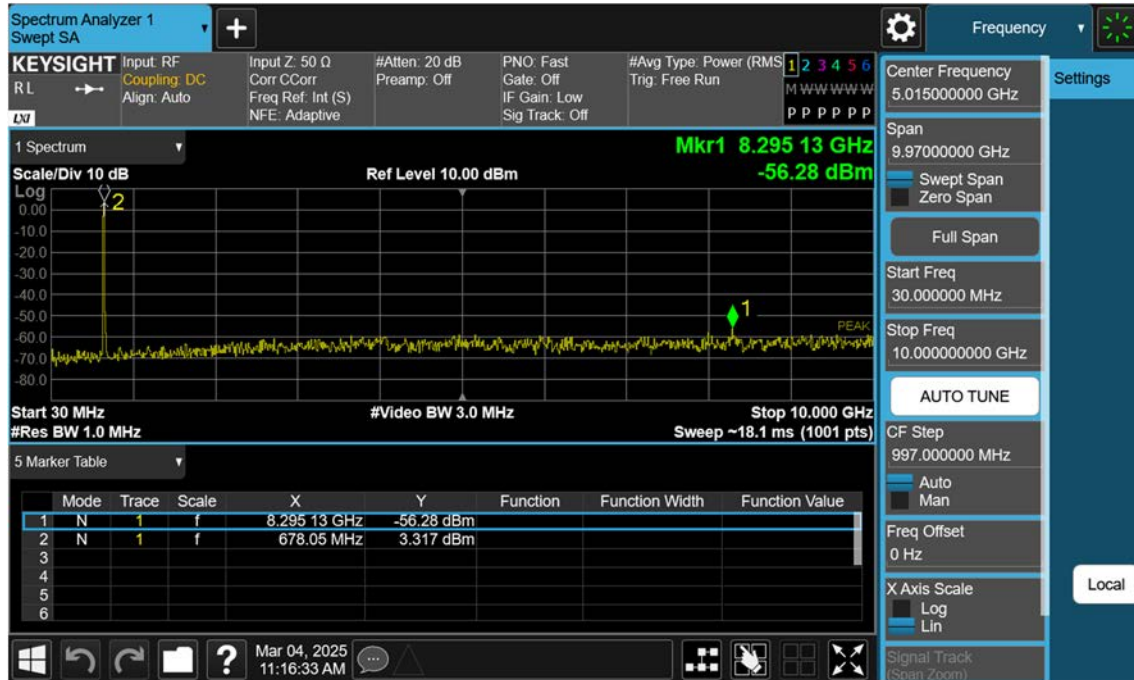


LTE B71_15 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

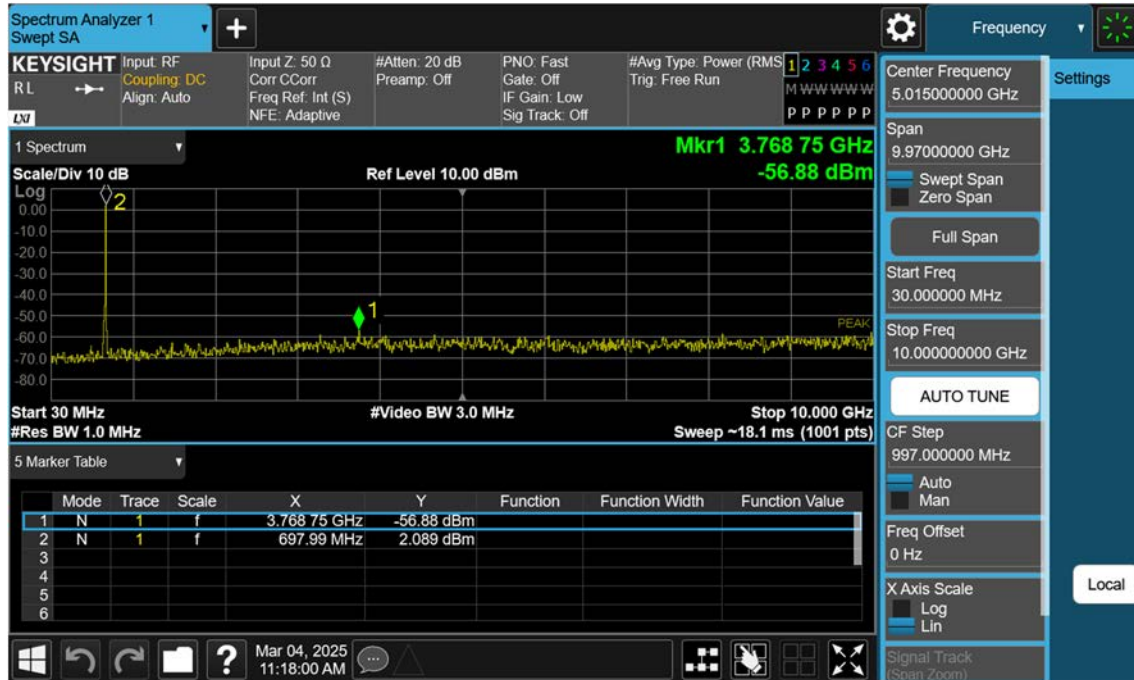


LTE B71_20 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

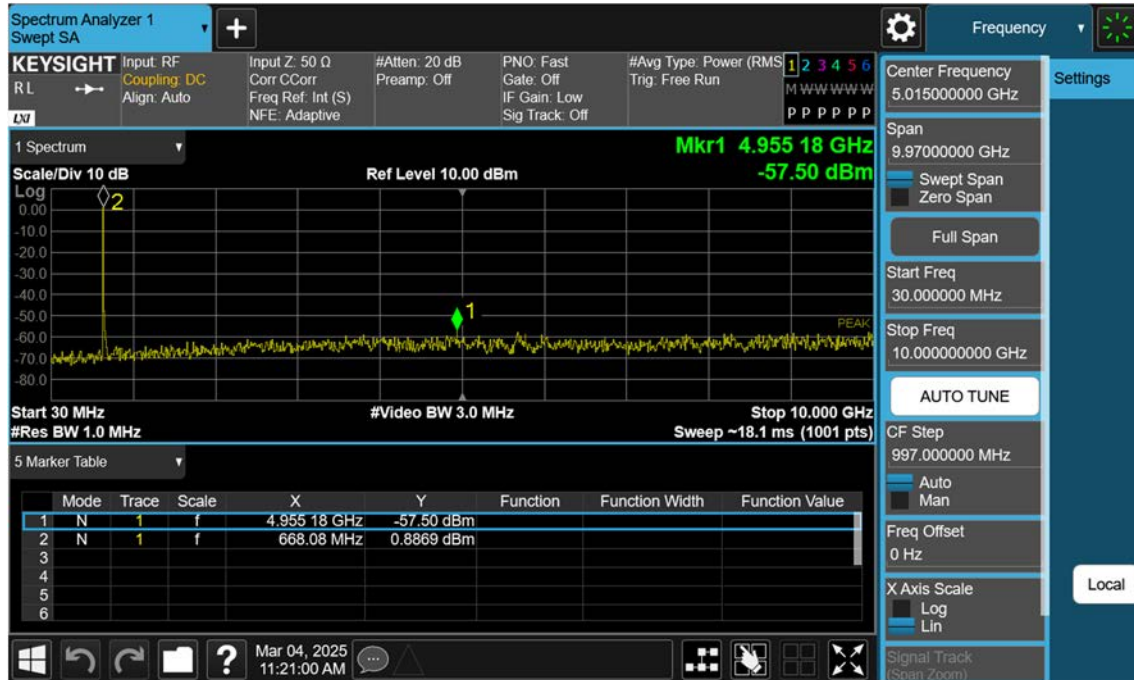

LTE B71_20 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

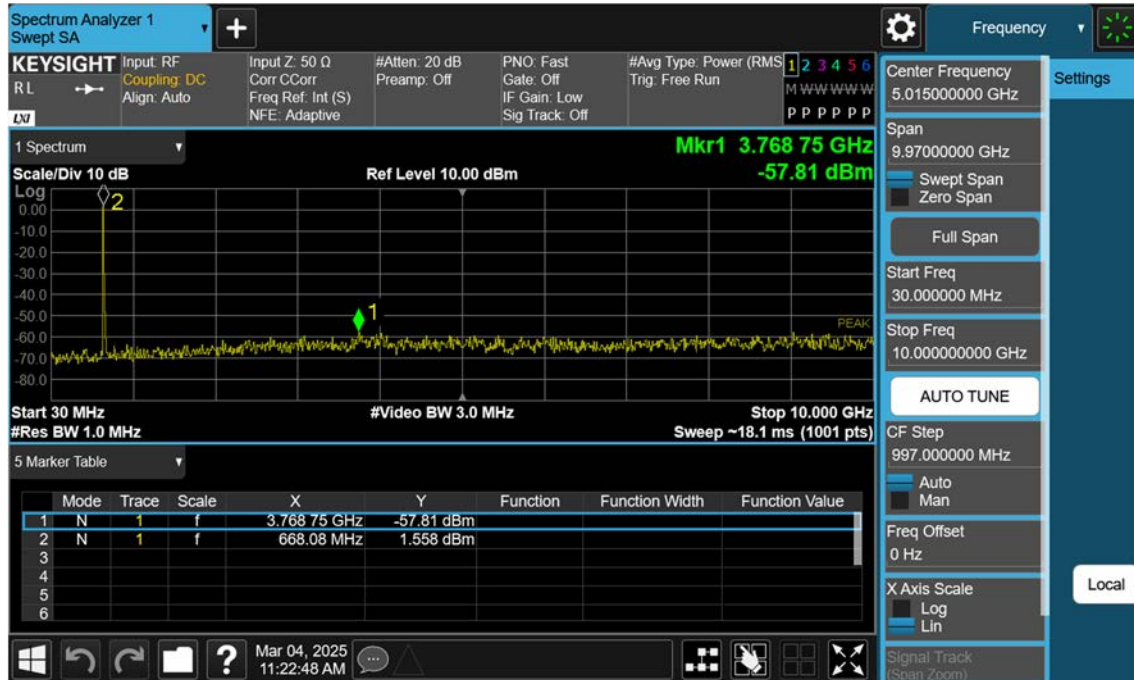

LTE B71_20 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

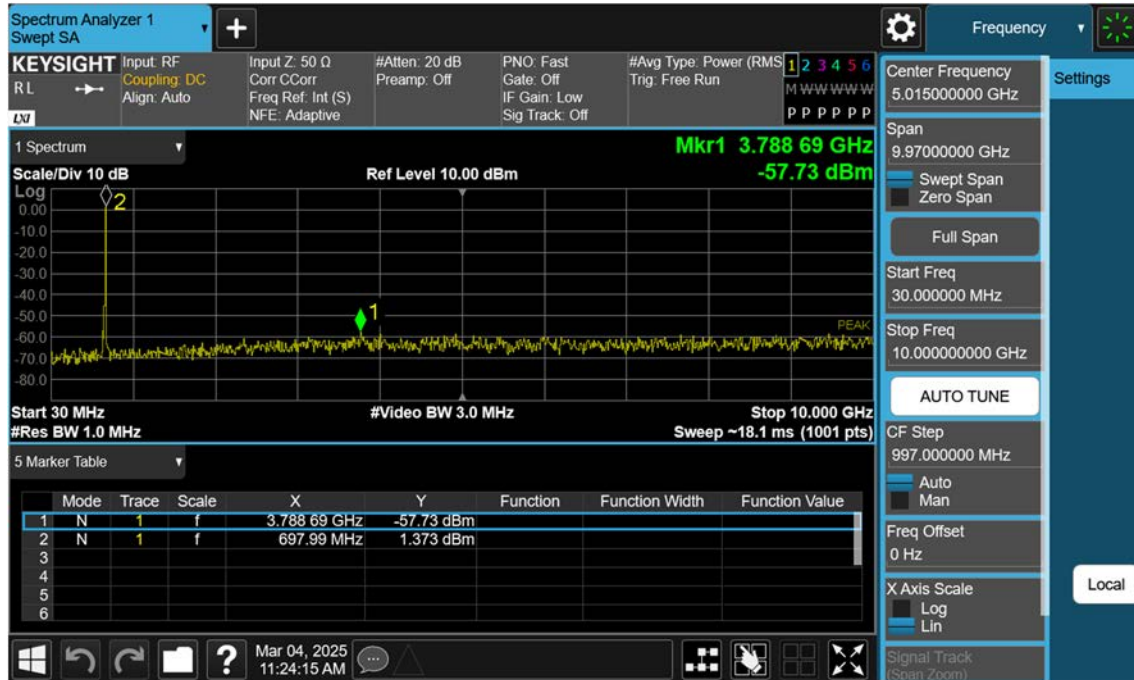

LTE B71_5 M_Channel Edge_Low_QPSK_1RB



LTE B71_5 M_Channel Edge_Low_QPSK_FullRB



LTE B71_5 M_Extended Channel Edge_Low_QPSK_FullRB



LTE B71_5 M_Channel Edge_High_QPSK_1RB



LTE B71_5 M_Channel Edge_High_QPSK_FullRB



LTE B71_5 M_Extended Channel Edge_High_QPSK_FullRB



LTE B71_10 M_Channel Edge_Low_QPSK_1RB



LTE B71_10 M_Channel Edge_Low_QPSK_FullRB



LTE B71_10 M_Extended Channel Edge_Low_QPSK_FullRB



LTE B71_10 M_Channel Edge_High_QPSK_1RB



LTE B71_10 M_Channel Edge_High_QPSK_FullRB



LTE B71_10 M_Extended Channel Edge_High_QPSK_FullRB



LTE B71_15 M_Channel Edge_Low_QPSK_1RB



LTE B71_15 M_Channel Edge_Low_QPSK_FullRB



LTE B71_15 M_Extended Channel Edge_Low_QPSK_FullRB



LTE B71_15 M_Channel Edge_High_QPSK_1RB



LTE B71_15 M_Channel Edge_High_QPSK_FullRB



LTE B71_15 M_Extended Channel Edge_High_QPSK_FullRB



LTE B71_20 M_Channel Edge_Low_QPSK_1RB



LTE B71_20 M_Channel Edge_Low_QPSK_FullRB



LTE B71_20 M_Extended Channel Edge_Low_QPSK_FullRB



LTE B71_20 M_Channel Edge_High_QPSK_1RB

