

WPT RF EXPOSURE EVALUATION TEST REPORT**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

3/26/2026-5/20/2026

Test Site/Location:

Element Washington DC LLC,
Columbia, MD, USA

Test Report Serial No.:

1M2604240033-19.A3L

Date of Issue:

5/27/2026

FCC ID:

A3LSMF776JPN

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

Apparatus/Device:	Portable Handset
Application Type:	Certification
Model:	SC-55G(SM-F776D)
Additional Model:	SCG40(SM-F776J)
Device Serial No.:	Pre-production Sample [SN: 1051M]
FCC Specification(s):	FCC 47 CFR Part 2.1093 KDB 680106 D01 v03r01

Mode	Thermal
	Basic Restriction
	Peak Spatial SAR (W/kg)
WPT	<0.01
Digitizer	<0.01
FCC Limit	1.6
Tested Distance	0mm
VERDICT	Pass

The device bearing the identifier specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in FCC 47 CFR Part 2.1093 and KDB 680106 D01 v03r01. These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 1 of 23

TEST REPORT REVISION HISTORY

Rev. No.	Report S/N	Description	Issue Date
-	1M2604240033-19.A3L	Initial Release	05/27/2026

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT		Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 		Page 2 of 23

TABLE OF CONTENTS

1	DATA REFERENCING	4
2	DEVICE UNDER TEST	5
3	MEASUREMENT SYSTEM	6
4	MEASUREMENT PROCEDURE	8
5	RF EXPOSURE LIMITS	9
6	SYSTEM CHECK	10
7	DATA SUMMARY	11
8	INFORMATIVE MEASUREMENT UNCERTAINTY	15
9	CONCLUSION	22
10	REFERENCES	23

APPENDIX A: RF EXPOSURE TEST PLOTS

APPENDIX B: TEST SETUP PHOTOGRAPHS

APPENDIX C: CALIBRATION CERTIFICATE

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	Page 3 of 23

1 DATA REFERENCING

1.1 Data Referencing

Reference Device	Variant Device	Mode	Comments
FCC: A3LSMF776U	FCC: A3LSMF776JPN	WPT Testing	See Section 7 for reference and spot-check data

Per manufacturer declaration, there are two portable handset devices FCC ID: A3LSMF776U and FCC ID: A3LSMF776JPN, with high degree of similarity, reference model FCC ID: A3LSMF776U and variant model FCC ID: A3LSMF776JPN. Both models share the same material, form factor, circuit design, and components, including antennas and their locations.

Based on the Data Referencing Test Plan, testing was done fully on the reference model FCC ID: A3LSMF776U, while spot-check verification has been performed on variant model FCC ID: A3LSMF776JPN. The spot check verification has been performed on the overall worst-case condition. The reference and variant model comparison data summary is included in section 7.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT		Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 		Page 4 of 23

2 DEVICE UNDER TEST

2.1 Device Overview

**Table 2-1
WPT Specifications**

Item	Description
Mode(s) Evaluated	Ping Signal (Standby) Device to Device – Inline Device to Device – Offset Device to Earbuds Device to Watch
Operating Frequency	110-145kHz
Maximum Tx Power	9W
Modulation/Protocol	FSK/ASK
Maximum Duty Cycle	50%
# of Coil Turns	30
Tx Coil Diameter	13.8mm (Inner) / 42mm (Outer)



Figure 2-1 WPT Occupied Bandwidth

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	Page 5 of 23

3

MEASUREMENT SYSTEM

3.1 DASY6/8 Module WPT V2.6+

System	DASY6/8 Module WPT is composed of the isotropic probe MAGPy-8H3D+E3D Version 2, the reference probe (MAGPy-RA ϕ), and the data acquisition system (MAGPy-DAS) mounted to the DASY6/8 robot via the emergency stop (MAGPy-ES). It measures the incident electric (E-) and magnetic (H-) fields in a volume from the surface of the device under test (DUT) using advanced field reconstructions to obtain a high-resolution (mm range) field distribution. The induced E-field distributions and specific absorption rate (SAR) are assessed with Sim4Life's Quasi-Static EM Solver (P-EM-QS) using only the measured data. At each probe location, eight sets of isotropic H-field values and one set of isotropic E-field values are acquired in parallel. The dedicated graphical user interface (GUI) fully automates the testing workflow.
Applications	Laboratory evaluation of WPT systems and any other local electromagnetic source not requiring magnetic (H-) field volume scans exceeding 2000 mm $\times$ 1000 mm $\times$ 1500 mm: - Assessment of high-resolution H-field distribution (3 kHz – 10 MHz) - Assessment of high-resolution E-field distribution (3 kHz – 10 MHz) - Determination of the induced field and SAR distribution in the standard phantom (3 kHz – 4 MHz) - Demonstration of compliance (3 kHz – 4 MHz) with international standards and national regulations, e.g., IEC PAS 63184, FCC KDB 680106 D01, ISED Canada SPR-002
Basic Components	The basic components of DASY6/8 Module WPT are: - Platform and DASY6/8 TX-90XL or TX2-90XL Robot - DASY6/8 Measurement Server - EOC8 - Light-Beam Unit - Quick Adapter Change System (QACSV1) - DASY6/8 PC
MAGPy-DAS	The MAGPy-DAS includes: 27 14-bit ADC channels with 25 MSPs - Peak detection stage - Hardware supervising unit - Data transfer to the backend 22 tap FIR filter
MAGPy-8H3D+E3D V2	The MAGPy-8H3D+E3D probe consists of eight isotropic H-field sensors and one isotropic E-field sensor: Probe design: - Probe length: 335 mm - Probe tip diameter: 60 mm 8H3D: eight isotropic 1 cm²-H-field sensors, arranged at the corners of a 22 mm cube - First H-field sensor plane: 7.5 mm from the probe tip - E3D: one isotropic E-field sensor (dipole/monopole) Sensor specifications: - Frequency range: 3 kHz – 10 MHz - H-field dynamic range: 0.1 A/m – 3200 A/m (0.12 μT – 4 mT) - H-field extrapolation uncertainty: 0.6 dB (k = 2) - E-field dynamic range: 0.08 V/m – 2000 V/m
MAGPy-RAϕV2	Specifications of the MAGPy-RA ϕ reference amplitude and phase probe: Frequency range: 3 kHz – 10 MHz

FCC ID: A3LSMF776JPN	 WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 
		Page 6 of 23

	• Dynamic range: 0.1 A/m – 3200 A/m (0.12 μT – 4 mT) • Loop coil area: 18.9 cm² • Sensor size: 51 mm × 51 mm × 0.2 mm
Software	Software components: • DASY6/8 Module WPT application programming interface (API) • WPT backend • Jupyter Notebook GUI • Sim4Life plugin (vector potential reconstruction, P-EM-QS solver)



Figure 3-1
DASY 6/8 Module WPT V2.6+ Test System

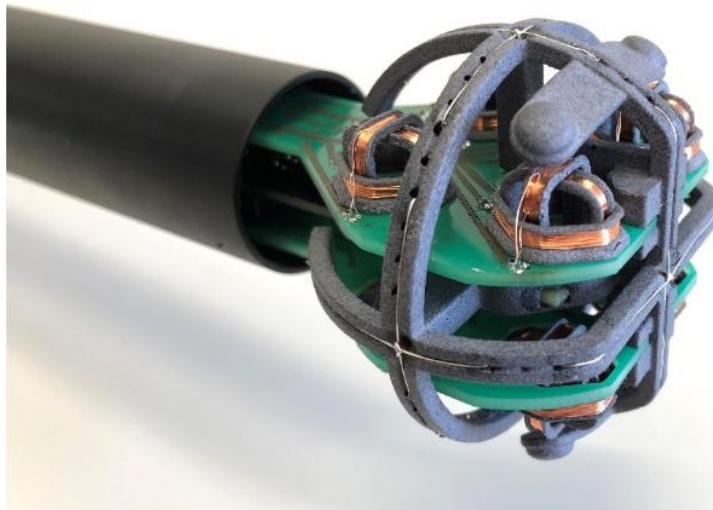


Figure 3-2
MAGPy-8H3D+E3 V2 Measurement Probe

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	Page 7 of 23

4 MEASUREMENT PROCEDURE

4.1 Measurement Procedure

Direct measurement (per FCC 47 CFR Part 2.1093 and KDB 680106 D01 v03r01) against the basic restrictions was employed for this report.

4.2 Measurement Distance

The measurement distance (spacing) is the manufacturer's declared separation distance obtained via information in the user manual. This shall be measured as the distance from the edge of the device to the edge of the measurement probe. Since it is possible for a user to touch the device while wirelessly charging, all testing was done at 0mm as a conservative approach.

4.3 Load Device Information

Table 4-1
WPT Load Devices

DUT Operating Mode	RX Device	S/N
Ping Signal (Standby)	N/A	N/A
Device to Device (Reference)	SM-F776U	0305M
Device to Device (Variant)	SM-F776D	1050M
Device to Earbuds	SM-R530	RFKL101FAVP
Device to Watch	SM-900 40mm	RFAT71RJACA

An FTM test mode was activated for all testing to ensure DUT transmits WPT signal at max power regardless of battery level / positioning.

4.4 Measurement Personnel

All measurements in this report were performed by the following personnel:

Test Engineer: YeJin Han

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	Page 8 of 23

5 RF EXPOSURE LIMITS

5.1 Limits for Maximum Permissible Exposure

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) LIMITS FOR OCCUPATIONAL/CONTROLLED EXPOSURE				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
(ii) LIMITS FOR GENERAL POPULATION/UNCONTROLLED EXPOSURE				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density.

(1) Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. In situations when an untrained person is transient through a location where occupational/controlled limits apply, he or she must be made aware of the potential for exposure and be supervised by trained personnel pursuant to § 1.1307(b)(2) of this part where use of time averaging is required to ensure compliance with the general population exposure limit. The phrase exercise control means that an exposed person is allowed and also knows how to reduce or avoid exposure by administrative or engineering work practices, such as use of personal protective equipment or time averaging of exposure.

(2) General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure. For example, RF sources intended for consumer use shall be subject to the limits for general population/uncontrolled exposure in this section.

5.2 Limits for Peak Spatial SAR

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

**An evaluation against the limits for peak spatial SAR shall be performed when the DUT exceeds the limits for maximum permissible exposure.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT		Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 		Page 9 of 23

6 SYSTEM CHECK

Prior to testing, a system check was performed to verify that the test system operates as expected and measures RF exposure accurately. A known E-field/H-field source was used to verify readings of the measurement probe to $\pm 1.24\text{dB}$ of the known fields. A virtual half-space phantom with tissue properties $\epsilon_r = 55$, $\sigma = 0.75\text{S/m}$, $\rho = 1000\text{kg/m}^3$.

6.1 System Check


**Table 6-1
System Check**

Test Date	Frequency	Distance	Value	Incident H-Field (A/m)	Induced Peak Current Density (A/m ² , RMS)	Induced Peak E-field (V/m)			Peak Spatial SAR (mW/kg)	
						Cube Avg.	Local	Line Avg.	1g Avg.	10g Avg.
5/20/2026	85kHz	0	Measurement	214	2.41	3.41	3.44	3.45	6.82	5.06
			Deviation (dB)	0.46	0.29	0.23	0.23	0.23	0.62	0.64
		2	Measurement	194	2.27	3.22	3.25	3.26	6.09	4.59
			Deviation (dB)	0.37	0.31	0.27	0.27	0.27	0.64	0.65
5/20/2026	400kHz	0	Measurement	273	2.82	4.48	4.59	4.6	7.78	3.81
			Deviation (dB)	0.10	0.41	0.44	0.43	0.43	0.40	0.36
		2	Measurement	240	2.39	3.84	3.95	3.96	5.62	2.81
			Deviation (dB)	0.11	0.41	0.44	0.43	0.43	0.39	0.35

* A virtual half-space phantom with tissue properties $\epsilon_r = 55$, $\sigma = 0.75\text{S/m}$, $\rho = 1000\text{kg/m}^3$ was used to calculate the results in Table 5-1.

**Table 6-2
Equipment List**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
SPEAG	V-COIL350/85	85kHz MAGPy System Validation Source	7/31/2025	Annual	7/31/2026	1031
SPEAG	V-COIL50/400	400kHz MAGPy System Validation Source	8/12/2025	Annual	8/12/2026	1012
SPEAG	MAGPy-H3D / MAGPy-DAS	Magnetic Amplitude and Gradient Probe and Data Acquisition System	8/7/2025	Annual	8/7/2026	3116/3107

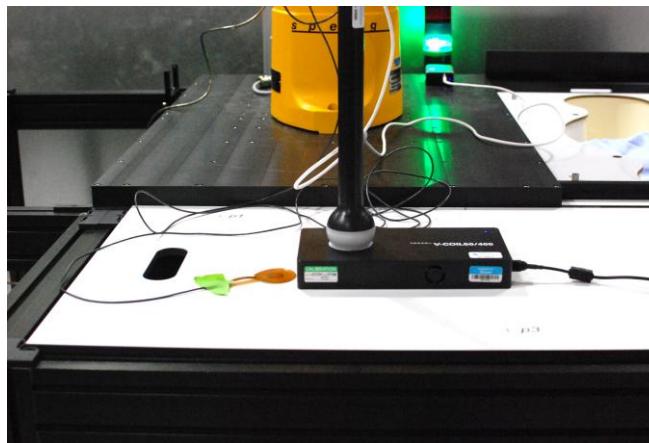

**Figure 5-1
System Check Setup**

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 			Page 10 of 23

Frequency (kHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
145	0	0.20	4.03	13.20	13.00	6.16	590.00	1.63
145	2	0.18	3.62	11.70	11.40	5.45	507.00	1.63

Table 7-1. Standby (Ping - Open) Incident H-Field*

Frequency (kHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
145	0	4.34	5.70	12.60	6.19	8.04	85.10	614
145	2	3.97	5.20	11.40	5.91	7.39	78.00	614

Table 7-2. Standby (Ping - Open) Incident E-Field

Frequency (kHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
145	0	6.14E-06	1.72E-03	6.94E-03	6.54E-03	1.28E-03	1.70E+00	1.6
145	2	5.26E-06	1.38E-03	5.24E-03	5.00E-03	1.06E-03	1.12E+00	1.6

Table 7-3. Standby (Ping - Open) SAR

Frequency (kHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
145	0	4.67	4.09	14.60	14.30	4.21	729.00	1.63
145	2	4.11	3.67	12.40	12.60	3.75	627.00	1.63

Table 7-4. Standby (Ping - Closed) Incident H-Field*

Frequency (kHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
145	0	10.10	6.66	9.76	8.48	11.60	174.00	614
145	2	9.08	6.09	8.87	7.84	10.90	155.00	614

Table 7-5. Standby (Ping - Closed) Incident E-Field

Frequency (kHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
145	0	1.95E-03	1.68E-03	7.65E-03	7.44E-03	8.64E-04	2.66E+00	1.6
145	2	1.54E-03	1.35E-03	5.77E-03	5.61E-03	7.47E-04	1.73E+00	1.6

Table 7-6. Standby (Ping - Closed) SAR

* An evaluation against the limits for peak spatial SAR shall be performed when the DUT exceeds the limits for maximum permissible exposure.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	Page 11 of 23

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Frequency (kHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	0.04	2.24	0.98	2.25	3.17	3.78	1.63
112	2	0.04	1.97	0.87	1.96	2.74	3.30	1.63

Table 7-7. Device to Device Offset Incident H-Field*

Frequency (kHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	2.51	2.59	5.19	4.81	25.20	17.40	614
112	2	2.39	2.47	4.79	4.42	22.90	16.00	614

Table 7-8. Device to Device Offset Incident E-Field

Frequency (kHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	2.36E-07	6.23E-05	3.44E-05	5.10E-05	2.66E-04	2.61E-04	1.6
112	2	2.19E-07	5.18E-05	2.75E-05	3.82E-05	2.06E-04	2.02E-04	1.6

Table 7-9. Device to Device Offset SAR

Frequency (kHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	2.67	0.10	2.22	2.49	2.68	5.37	1.63
112	2	2.33	0.09	1.91	2.12	2.21	4.73	1.63

Table 7-10. Device to Device Inline Incident H-Field*

Frequency (kHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	15.50	32.00	24.10	19.60	15.30	19.30	614
112	2	14.00	28.50	21.80	17.90	14.20	17.80	614

Table 7-11. Device to Device Inline Incident E-Field

Frequency (kHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	8.13E-05	2.07E-06	9.47E-05	6.89E-05	7.76E-05	2.41E-04	1.6
112	2	7.20E-05	1.81E-06	7.64E-05	5.47E-05	6.68E-05	1.93E-04	1.6

Table 7-12. Device to Device Inline SAR

* An evaluation against the limits for peak spatial SAR shall be performed when the DUT exceeds the limits for maximum permissible exposure.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT					Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 					Page 12 of 23

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Frequency (kHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	0.48	6.44	20.00	25.00	10.90	27.10	1.63
112	2	0.44	5.74	17.40	21.80	9.60	24.20	1.63

Table 7-10. Device to Earbuds Incident H-Field*

Frequency (kHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	25.60	29.10	20.80	23.30	55.40	135.00	614
112	2	23.30	26.70	19.60	22.40	50.30	125.00	614

Table 7-11. Device to Earbuds Incident E-Field

Frequency (kHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	3.33E-05	1.59E-03	5.01E-03	7.02E-03	2.27E-03	1.36E-02	1.6
112	2	3.07E-05	1.31E-03	3.78E-03	5.31E-03	1.86E-03	1.08E-02	1.6

Table 7-12. Device to Earbuds SAR

Frequency (kHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	0.42	6.73	17.90	25.20	10.60	91.00	1.63
112	2	0.38	5.99	15.70	21.90	9.33	79.30	1.63

Table 7-13. Device to Watch Incident H-Field*

Frequency (kHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	12.00	10.60	18.40	23.30	34.90	214.00	614
112	2	10.90	10.00	16.90	22.30	32.20	196.00	614

Table 7-14. Device to Watch Incident E-Field

Frequency (kHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
112	0	1.14E-05	1.93E-03	5.24E-03	7.21E-03	1.94E-03	6.67E-02	1.6
112	2	1.04E-05	1.55E-03	3.96E-03	5.42E-03	1.62E-03	4.83E-02	1.6

Table 7-15. Device to Watch SAR

* An evaluation against the limits for peak spatial SAR shall be performed when the DUT exceeds the limits for maximum permissible exposure.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT				Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 				Page 13 of 23

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Frequency (kHz)	Distance (mm)	Worst Case Evaluation with TA		
		Incident H-field (A/m)	Incident E-field (V/m)	SAR (mW/kg)
145	0	729.00	174.00	2.66E+00
145	2	627.00	155.00	1.73E+00

Table 7-16. Standby (Ping - Closed) Back**

**The overall worst-case configuration was additionally evaluated when plugged into the travel adapter

7.1 A3LSMF776JPN Spot-Check Data

Configuration	Device	Frequency (kHz)	Distance (mm)	SAR (mW/kg)	Limit (mW/kg)
Standby (Ping - Closed) Backside	A3LSMF776U (Reference)	145	0	2.66	1600
	A3LSMF776U (Reference)	145	2	1.73	1600
	A3LSMF776D (Variant)	145	0	2.55	1600
	A3LSMF776D (Variant)	145	2	1.66	1600

Table 7-19. A3LSMF776JPN Worst Case Spot-Check Data

RF Exposure Spot-Check Acceptance (per KDB 484596)							
Worst-Case Configuration	RF Exposure Evaluation	Reference (TER _R)	Variant (TER _V)	Relative Difference (d _{TER})	Margin (M)	Max Acceptable Difference (d _{TERmax})	Acceptance
Standby (Ping - Closed) Backside, 0 mm	SAR	1.6×10 ⁻³	1.5×10 ⁻³	6.25%	0.999	50%	Yes

Table 7-20. A3LSF776JPN Worst-Case Test Configuration for Spot-Check Evaluation

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT				Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 				Page 14 of 23

8 INFORMATIVE MEASUREMENT UNCERTAINTY

8.1 Uncertainty Budget of Peak Incident H-Field

DASY6 Uncertainty Budget for Peak Incident <i>H</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E-field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.10
12	Surface field reconstruction	0.3	N	1	1	0.3
Combined uncertainty ($k = 1$)						0.67
Expanded uncertainty ($k = 2$)						1.33 (16.6%)

8.2 Uncertainty Budget of Peak Incident E-Field

DASY6 Uncertainty Budget for Incident <i>E</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.53	N	1	1	0.53
2	Probe anisotropy	0.8	R	$\sqrt{3}$	1	0.46
3	Probe dynamic linearity	1	R	$\sqrt{3}$	1	0.58
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Parasitic H-field sensitivity	0.2	R	$\sqrt{3}$	1	0.12
7	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
8	Readout electronics	0	N	1	1	0
9	Repeatability	0.1	N	1	1	0.10
Combined uncertainty ($k = 1$)						0.95
Expanded uncertainty ($k = 2$)						1.89 (24.4%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 15 of 23

8.3 Uncertainty Budget of Cube Average E_{ind}

DASY6 Uncertainty Budget for Peak $2 \times 2 \times 2 \text{ mm}^3$ Cube-Average E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm$ dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm$ dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.18	R	$\sqrt{3}$	1	0.10
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.24	N	1	1	0.24
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.72
Expanded uncertainty ($k = 2$)						1.44 (18.0%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 			Page 16 of 23

8.4 Uncertainty Budget of Line Average E_{ind}

DASY6 Uncertainty Budget for Peak 5 mm Line-Average E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm$ dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm$ dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.25	R	$\sqrt{3}$	1	0.14
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.74
Expanded uncertainty ($k = 2$)						1.48 (18.5%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 			Page 17 of 23

8.5 Uncertainty Budget of Local E_{ind}

DASY6 Uncertainty Budget for Peak Local E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm$ dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm$ dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.09	R	$\sqrt{3}$	1	0.05
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.73
Expanded uncertainty ($k = 2$)						1.45 (18.2%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 			Page 18 of 23

8.6 Uncertainty Budget of Peak 1 cm² Area Average J_{ind}

DASY6 Uncertainty Budget for Peak 1 cm ² Area-Average J _{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c _i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	√3	1	0.35
3	Probe dynamic linearity	0.2	R	√3	1	0.12
4	Probe frequency domain response	0.3	R	√3	1	0.17
5	Probe frequency linear interp. fit	0.15	R	√3	1	0.09
6	Spatial averaging	0.1	R	√3	1	0.06
7	Parasitic E-field sensitivity	0.1	R	√3	1	0.06
8	Detection limit	0.15	R	√3	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.12	R	√3	1	0.07
14	Tissue parameters	0	R	√3	1	0
15	Exposure position	0	R	√3	1	0
16	Source representation	0.1	N	1	1	0.1
17	Convergence and power budget	0	R	√3	1	0
18	Boundary conditions	0.1	R	√3	1	0.06
19	Phantom loading/backscattering	0.1	R	√3	1	0.06
Combined uncertainty (<i>k</i> = 1)						0.68
Expanded uncertainty (<i>k</i> = 2)						1.36 (17.0%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 			Page 19 of 23

8.7 Uncertainty Budget of psSAR 1g

DASY6 Uncertainty Budget for psSAR1 g according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic <i>E</i> -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0.02	R	$\sqrt{3}$	1	0.01
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.09	N	1	1	0.09
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.63
Expanded uncertainty ($k = 2$)						1.27 (33.9%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT		Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 		Page 20 of 23

8.8 Uncertainty Budget of psSAR 10g

DASY6 Uncertainty Budget for psSAR10g according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic <i>E</i> -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0	R	$\sqrt{3}$	1	0
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.04	N	1	1	0.04
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.63
Expanded uncertainty ($k = 2$)						1.25 (33.4%)

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT			Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 			Page 21 of 23

9

CONCLUSION

9.1 Measurement Conclusion

The RF exposure evaluation indicates that the DUT complies with the exposure limits presented in FCC 47 CFR Part 2.1093 and KDB 680106 D01 v03r01 with respect to all parameters subject to this test. The worst-case configuration was evaluated against and satisfies the requirement of peak special SAR < 1.6 W/kg. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT		Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 		Page 22 of 23

10 REFERENCES

- [1] ICNIRP – International Commission on Non-Ionizing Radiation Protection. (1998). Guidelines for limiting exposure to time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz). Health Physics, 74(4), 494-522.
- [2] IEEE Standards Coordinating Committee 28. (2002). IEEE Standard for safety levels with respect to human exposure to electromagnetic fields, 0-3 kHz. New York, NY: IEEE - The Institute of Electrical and Electronics Engineers (IEEE Std C95.6-2002).
- [3] Health Canada. (2015). Safety Code 6: Limits of human exposure to radiofrequency electromagnetic fields in the frequency range from 3 kHz to 300 GHz.
- [4] ANSI/IEEE. (2006). C95.1-2005: American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3 kHz to 300 GHz. New York: IEEE.
- [5] Industry Canada (ISED). (2015). RSS-102: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), Issue 5, March 2015.
- [6] ISED. RSS-102.NS.MEAS: Measurement Procedure for Assessing Nerve Stimulation (NS) Compliance in Accordance with RSS-102.
- [7] ISED. (2016). SPR-002: Supplementary Procedure for Assessing Compliance with RSS-102 Nerve Stimulation Exposure Limits, Issue 1.
- [8] IEC. (2008). IEC 62369-1: Evaluation of human exposure to electromagnetic fields from short-range devices (SRDs) in various applications of the frequency range 0 GHz to 300 GHz – Part 1: Fields produced by devices used for electronic article surveillance, radio frequency identification, and similar systems.
- [9] ITU-T. (2008). K.61: Guidance on measurement and numerical prediction of electromagnetic fields for compliance with human exposure limits for telecommunication installations.
- [10] WHO – World Health Organization. (2007). Extremely low frequency fields. Environmental Health Criteria, Vol. 238. Geneva: World Health Organization.
- [11] FCC Office of Engineering and Technology. (2023). KDB 680106 D01 v03r01, October 24, 2023.
- [12] FCC. (2024). 47 CFR Part 2.1093, October 21, 2024.
- [13] ISED. (2024). Notice 2024-DRS0005: Updates on internal electric field strength (E-field) assessments using the DASY Module WPT.
- [14] DASY8. Module WPT System Handbook including SW Module WPT 2.8.

FCC ID: A3LSMF776JPN		WPT RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
Filename: 1M2604240033-19.A3L	DUT Type: Portable Handset	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	Page 23 of 23