



LTE Band 13 – Ant2

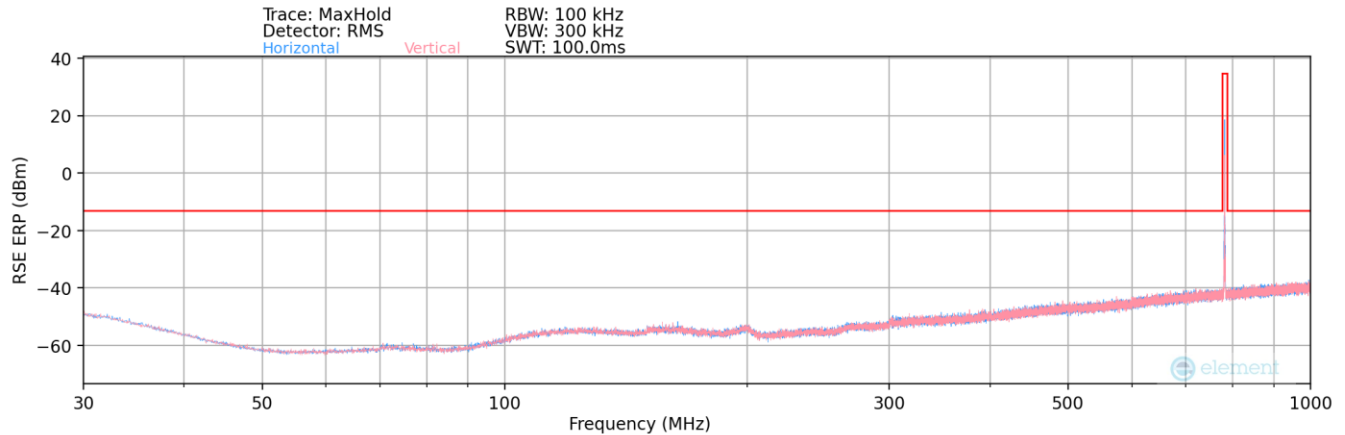

Plot 7-211. Radiated Spurious Plot (LTE Band 13) – Ant2

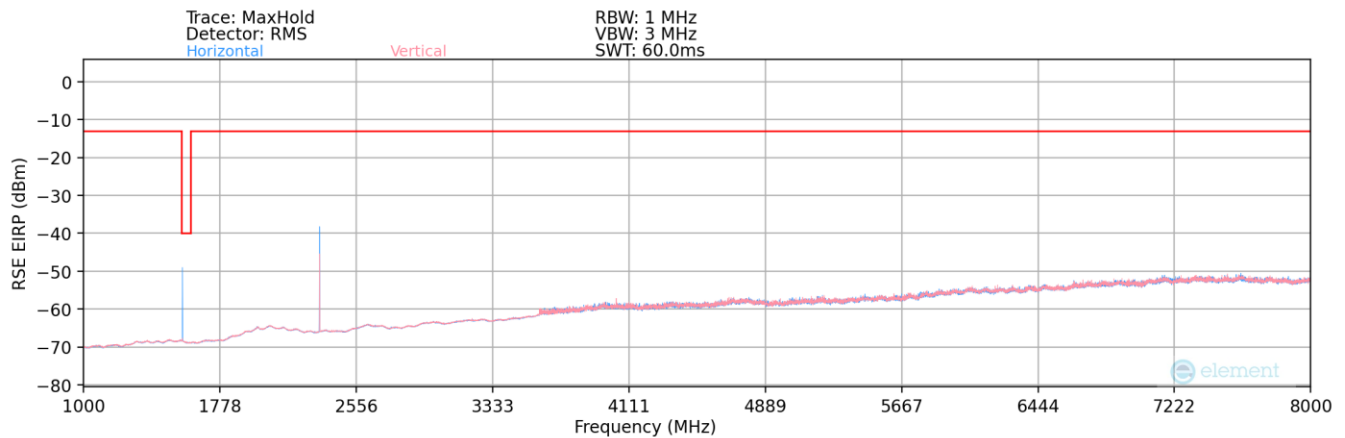

Plot 7-212. Radiated Spurious Plot (LTE Band 13) – Ant2

Bandwidth (MHz):	10
Frequency (MHz):	782
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
200.00	H	-	-	-82.39	20.01	44.62	-52.79	-13.00	-39.79

Table 7-52. Radiated Spurious Data (LTE Band 13) – Ant2


Bandwidth (MHz):	10
Frequency (MHz):	782
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1564.00	H	112	310	-52.30	-6.97	47.73	-47.53	-40.00	-7.53
2346.00	H	150	321	-45.93	-4.17	56.90	-38.36	-13.00	-25.36
3128.00	H	-	-	-77.02	-2.04	27.94	-67.32	-13.00	-54.32
3910.00	H	-	-	-78.66	0.99	29.33	-65.93	-13.00	-52.93
4692.00	H	-	-	-78.39	2.56	31.17	-64.09	-13.00	-51.09


Table 7-53. Radiated Spurious Data (LTE Band 13 – Mid Channel) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 171 of 186

LTE Band 66/4 – Ant2

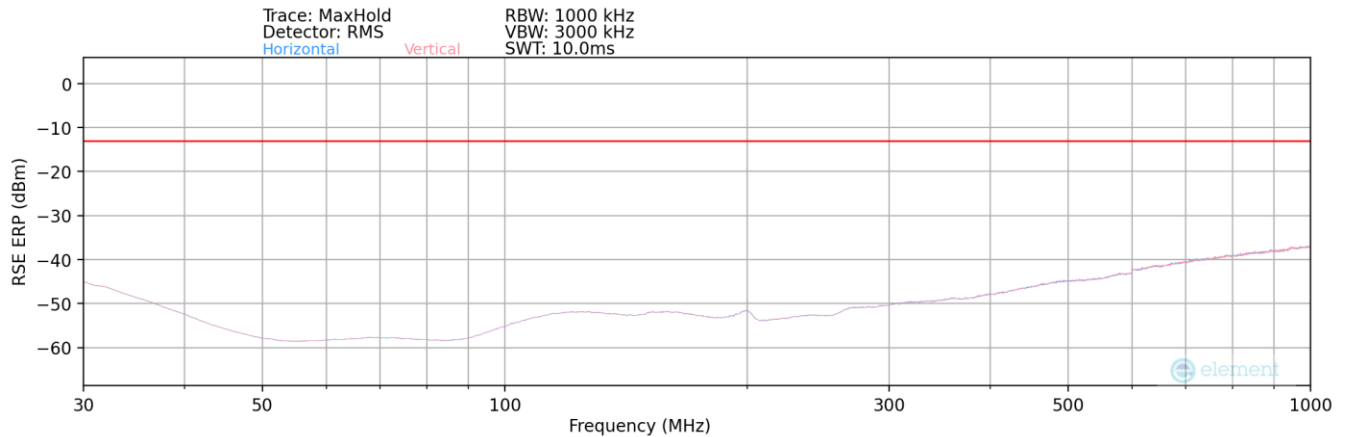

Plot 7-213. Radiated Spurious Plot (LTE Band 66/4) – Ant2

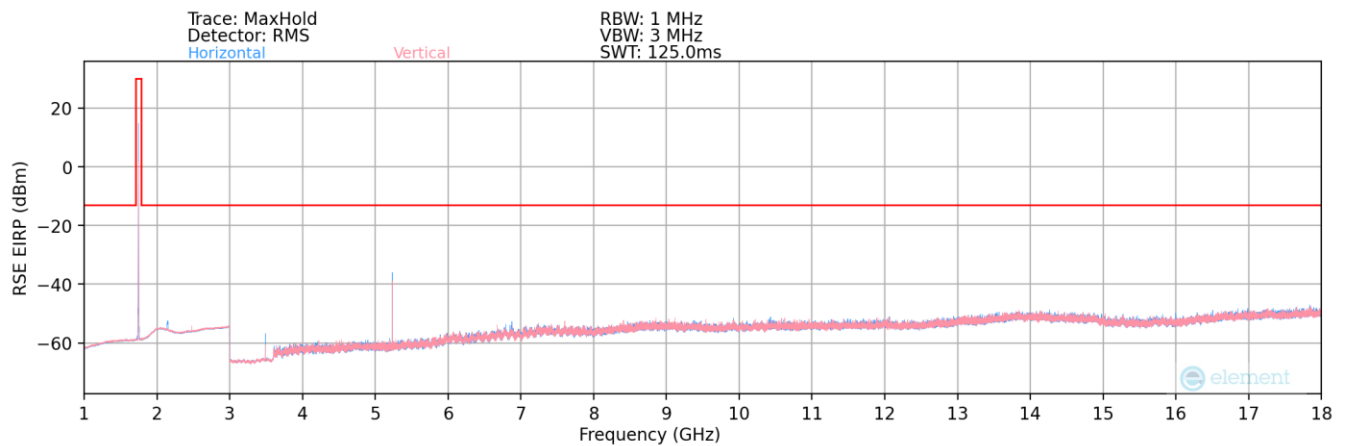

Plot 7-214. Radiated Spurious Plot (LTE Band 66/4) – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	1745
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
201.00	H	-	-	-85.60	19.83	41.23	-56.18	-13.00	-43.18

Table 7-54. Radiated Spurious Data (LTE Band 66/4) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 172 of 186

Bandwidth (MHz):	20
Frequency (MHz):	1720
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3440.00	H	112	210	-74.42	-0.04	32.54	-62.72	-13.00	-49.72
5160.00	H	112	196	-55.15	2.84	54.69	-40.57	-13.00	-27.57
6880.00	H	-	-	-79.29	8.57	36.28	-58.98	-13.00	-45.98
8600.00	H	-	-	-79.96	10.87	37.91	-57.34	-13.00	-44.34
10320.00	H	-	-	-80.14	11.12	37.98	-57.28	-13.00	-44.28

Table 7-55. Radiated Spurious Data (LTE Band 66/4 – Low Channel) – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	1745
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3490.00	H	118	327	-66.53	-0.25	40.22	-55.04	-13.00	-42.04
5235.00	H	112	328	-52.57	3.03	57.46	-37.80	-13.00	-24.80
6980.00	H	-	-	-78.66	7.50	35.84	-59.41	-13.00	-46.41
8725.00	H	-	-	-79.66	10.85	38.19	-57.07	-13.00	-44.07
10470.00	H	-	-	-80.71	12.00	38.29	-56.97	-13.00	-43.97

Table 7-56. Radiated Spurious Data (LTE Band 66/4 – Mid Channel) – Ant2


Bandwidth (MHz):	20
Frequency (MHz):	1770
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3540.00	H	112	327	-64.44	-0.50	42.06	-53.20	-13.00	-40.20
5310.00	H	114	336	-61.92	2.99	48.07	-47.19	-13.00	-34.19
7080.00	H	-	-	-78.84	8.08	36.24	-59.02	-13.00	-46.02
8850.00	H	-	-	-79.74	11.03	38.29	-56.96	-13.00	-43.96
10620.00	H	-	-	-80.85	12.35	38.50	-56.76	-13.00	-43.76


Table 7-57. Radiated Spurious Data (LTE Band 66/4 – High Channel) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 173 of 186

NR Band n66 – Ant2

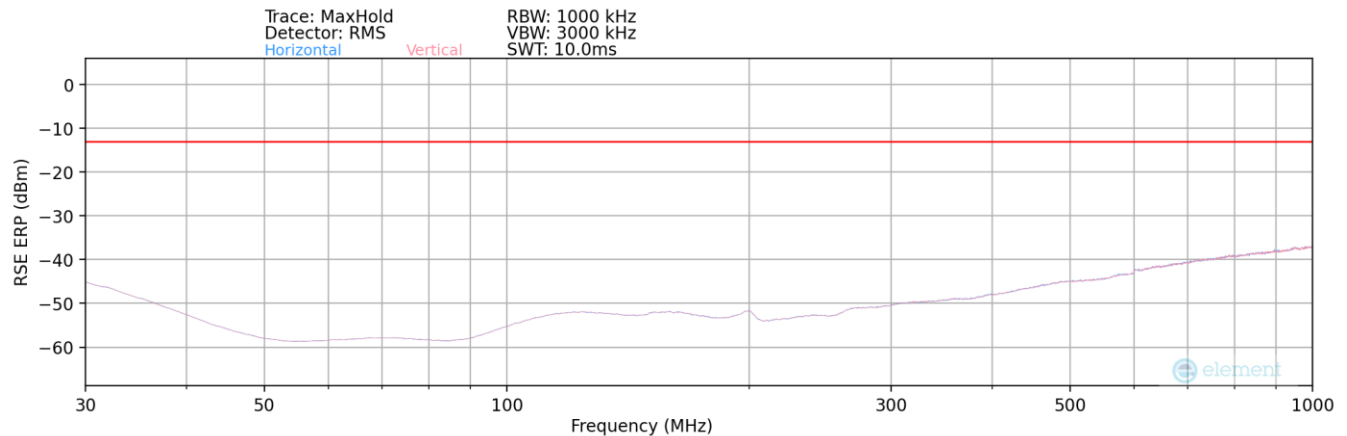

Plot 7-215. Radiated Spurious Plot (NR Band n66) – Ant2

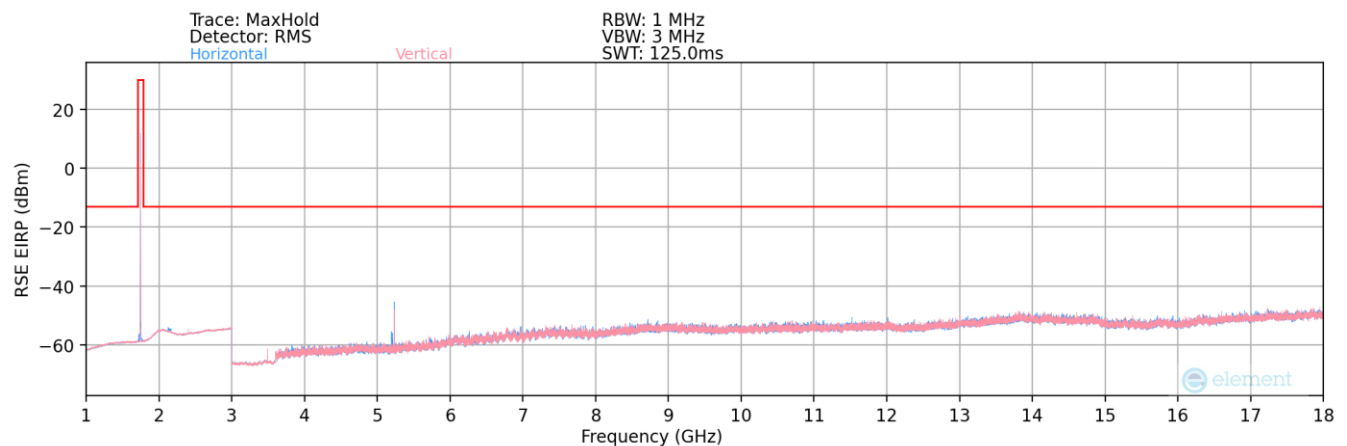

Plot 7-216. Radiated Spurious Plot (NR Band n66) – Ant2

Bandwidth (MHz):	40
Frequency (MHz):	1730
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
236.92	H	-	-	-85.15	18.67	40.52	-56.89	-13.00	-43.89

Table 7-58. Radiated Spurious Data (NR Band n66) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 174 of 186

Bandwidth (MHz):	40
Frequency (MHz):	1730
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3460.00	H	375	315	-73.09	-0.21	33.70	-61.55	-13.00	-48.55
5190.00	H	252	211	-52.77	3.21	57.44	-37.82	-13.00	-24.82
6920.00	H	-	-	-78.90	7.96	36.06	-59.20	-13.00	-46.20
8650.00	H	-	-	-79.88	10.67	37.79	-57.47	-13.00	-44.47
10380.00	H	-	-	-80.64	11.46	37.82	-57.44	-13.00	-44.44

Table 7-59. Radiated Spurious Data (NR Band n66 – Low Channel) – Ant2

Bandwidth (MHz):	40
Frequency (MHz):	1745
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3490.00	H	264	209	-72.93	-0.25	33.82	-61.44	-13.00	-48.44
5235.00	H	267	208	-53.85	3.03	56.18	-39.08	-13.00	-26.08
6980.00	H	-	-	-78.72	7.50	35.78	-59.47	-13.00	-46.47
8725.00	H	-	-	-79.72	10.85	38.13	-57.13	-13.00	-44.13
10470.00	H	-	-	-80.68	12.00	38.32	-56.94	-13.00	-43.94

Table 7-60. Radiated Spurious Data (NR Band n66 – Mid Channel) – Ant2

Bandwidth (MHz):	40
Frequency (MHz):	1760
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3520.00	H	269	313	-72.64	-0.33	34.03	-61.23	-13.00	-48.23
5280.00	H	243	211	-55.24	3.04	54.80	-40.45	-13.00	-27.45
7040.00	H	-	-	-78.70	7.63	35.93	-59.32	-13.00	-46.32
8800.00	H	-	-	-79.76	10.55	37.79	-57.47	-13.00	-44.47
10560.00	H	-	-	-80.66	11.95	38.29	-56.97	-13.00	-43.97

Table 7-61. Radiated Spurious Data (NR Band n66 – High Channel) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 175 of 186

7.9 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 176 of 186


LTE Band 12

Operating Frequency (Hz):	707,500,000
Ref. Voltage (VDC):	4.521
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	707,591,597	-977	-0.0001381
		- 20	707,591,928	-646	-0.0000913
		- 10	707,591,525	-1,049	-0.0001482
		0	707,591,996	-578	-0.0000817
		+ 10	707,591,242	-1,332	-0.0001882
		+ 20 (Ref)	707,592,574	0	0.0000000
		+ 30	707,591,626	-948	-0.0001340
		+ 40	707,593,104	530	0.0000749
Battery Endpoint	3.398	+ 50	707,593,892	1,318	0.0001863
		+ 20	707,592,167	-407	-0.0000575

Table 7-62. LTE Band 12 Frequency Stability Data

LTE Band 12

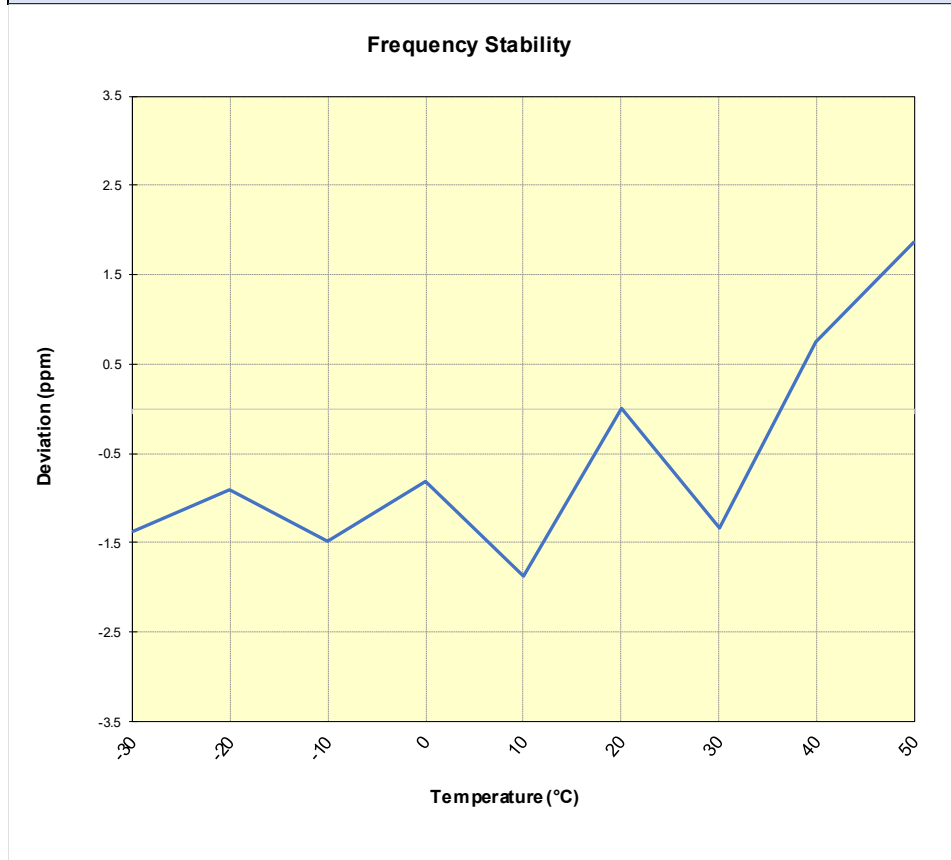

Plot 7-217. LTE Band 12 Frequency Stability Chart

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 177 of 186


LTE Band 13

Operating Frequency (Hz):	782,000,000
Ref. Voltage (VDC):	4.521
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	782,087,530	221	0.0000283
		- 20	782,088,213	904	0.0001156
		- 10	782,087,751	442	0.0000565
		0	782,087,512	203	0.0000260
		+ 10	782,088,426	1,117	0.0001428
		+ 20 (Ref)	782,087,309	0	0.0000000
		+ 30	782,087,021	-288	-0.0000368
		+ 40	782,088,947	1,638	0.0002094
Battery Endpoint	3.398	+ 50	782,088,568	1,259	0.0001610
		+ 20	782,087,587	278	0.0000355

Table 7-63. LTE Band 13 Frequency Stability Data

LTE Band 13

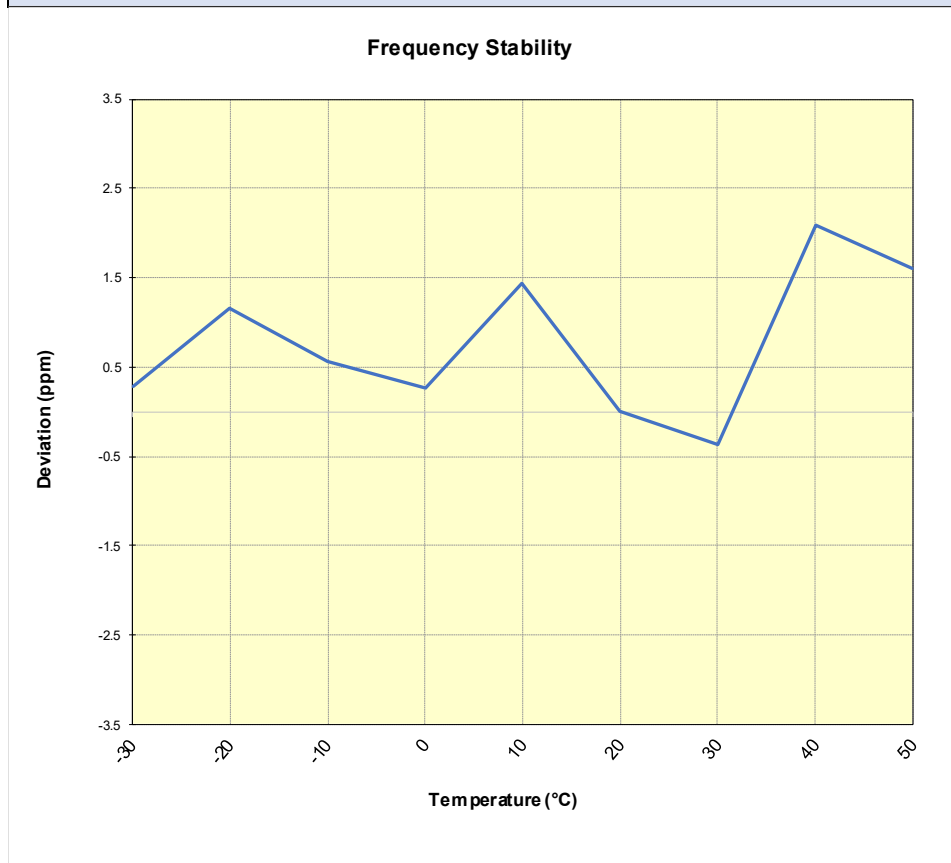

Plot 7-218. LTE Band 13 Frequency Stability Chart

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 178 of 186


LTE Band 66/4

Operating Frequency (Hz):	1,745,000,000
Ref. Voltage (VDC):	4.521
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	1,745,102,114	830	0.0000476
		- 20	1,745,103,064	1,780	0.0001020
		- 10	1,745,099,646	-1,638	-0.0000939
		0	1,745,097,734	-3,550	-0.0002034
		+ 10	1,745,098,779	-2,505	-0.0001435
		+ 20 (Ref)	1,745,101,284	0	0.0000000
		+ 30	1,745,100,587	-697	-0.0000399
		+ 40	1,745,099,810	-1,474	-0.0000845
		+ 50	1,745,104,888	3,604	0.0002065
Battery Endpoint	3.398	+ 20	1,745,099,294	-1,990	-0.0001140

Table 7-64. LTE Band 66/4 Frequency Stability Data

LTE Band 66/4

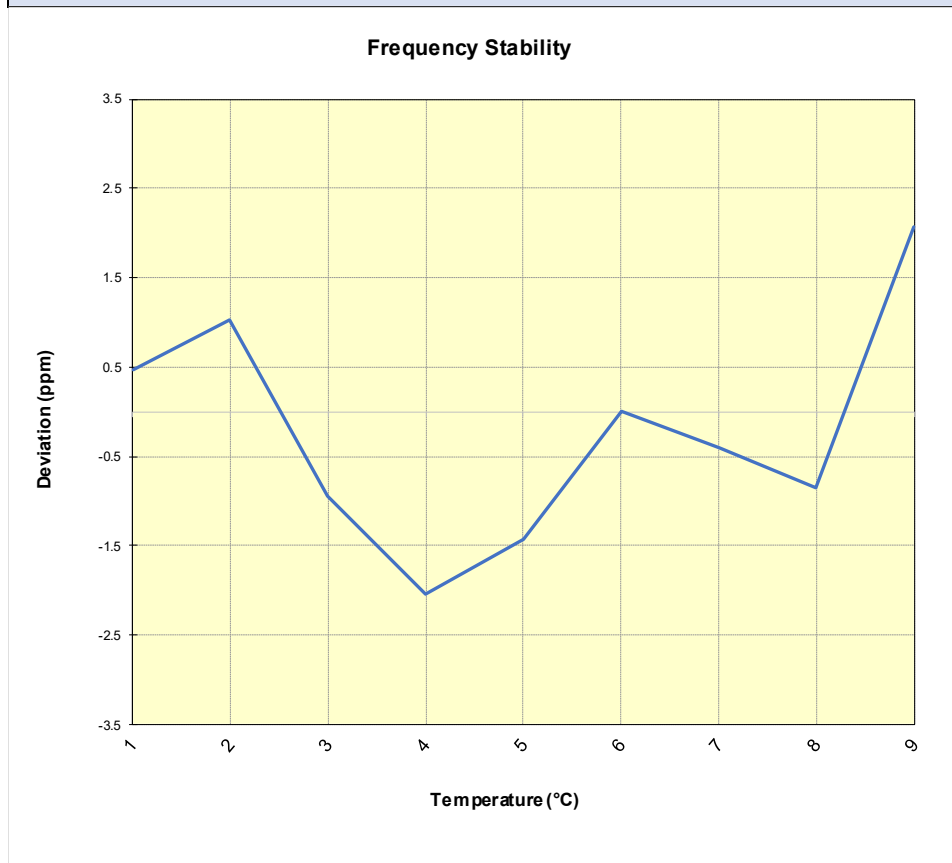

Plot 7-219. LTE Band 66/4 Frequency Stability Chart

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 179 of 186


NR Band n66

Operating Frequency (Hz):	1,745,000,000
Ref. Voltage (VDC):	4.521
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	1,744,995,294	3,928	0.0002251
		- 20	1,744,991,074	-292	-0.0000167
		- 10	1,744,995,490	4,124	0.0002363
		0	1,744,990,353	-1,013	-0.0000581
		+ 10	1,744,992,031	665	0.0000381
		+ 20 (Ref)	1,744,991,366	0	0.0000000
		+ 30	1,744,991,418	52	0.0000030
		+ 40	1,744,994,085	2,719	0.0001558
Battery Endpoint	3.398	+ 50	1,744,992,670	1,304	0.0000747
		+ 20	1,744,989,626	-1,740	-0.0000997

Table 7-65. NR Band n66 Frequency Stability Data

NR Band n66

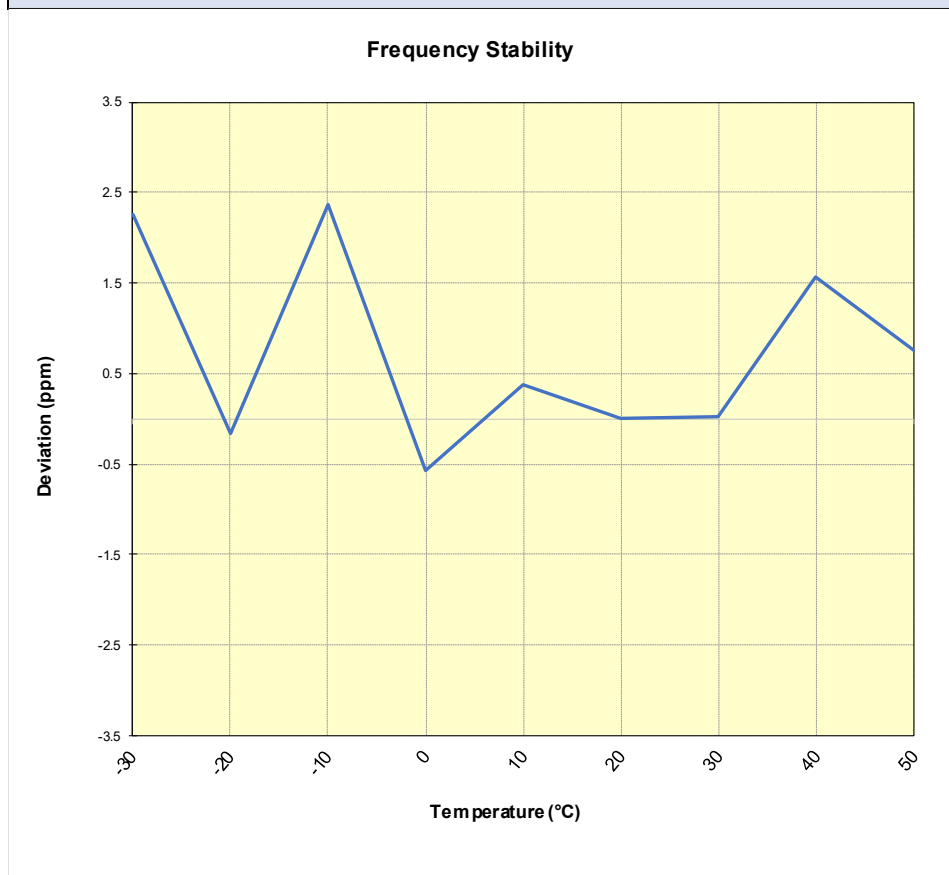

Plot 7-220. NR Band n66 Frequency Stability Chart

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 180 of 186

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF776JPN** complies with all the requirements of Part 27 of the FCC rules. The data referenced from **FCC ID: A3LSMF776U** (Model SM-F776U) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMF776JPN**.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 181 of 186

9.0 APPENDIX A – DATA REFERENCING RESULTS

Overview

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.26-2015.

Notes

1. Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – Model: SC-55G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23130	711.0	1 / 49	24.96

Table 9-1. Conducted Output Power Measurements (Spot-check) – LTE Band B12

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23230	782.0	1 / 0	24.69

Table 9-2. Conducted Output Power Measurements (Spot-check) – LTE Band B13

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132322	1745.0	1 / 0	24.13

Table 9-3. Conducted Output Power Measurements (Spot-check) – LTE Band B66/4

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 182 of 186




Plot 9-1. Occupied Bandwidth (Spot-check) – LTE Band B12



Plot 9-2. Occupied Bandwidth (Spot-check) – LTE Band B13

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 183 of 186

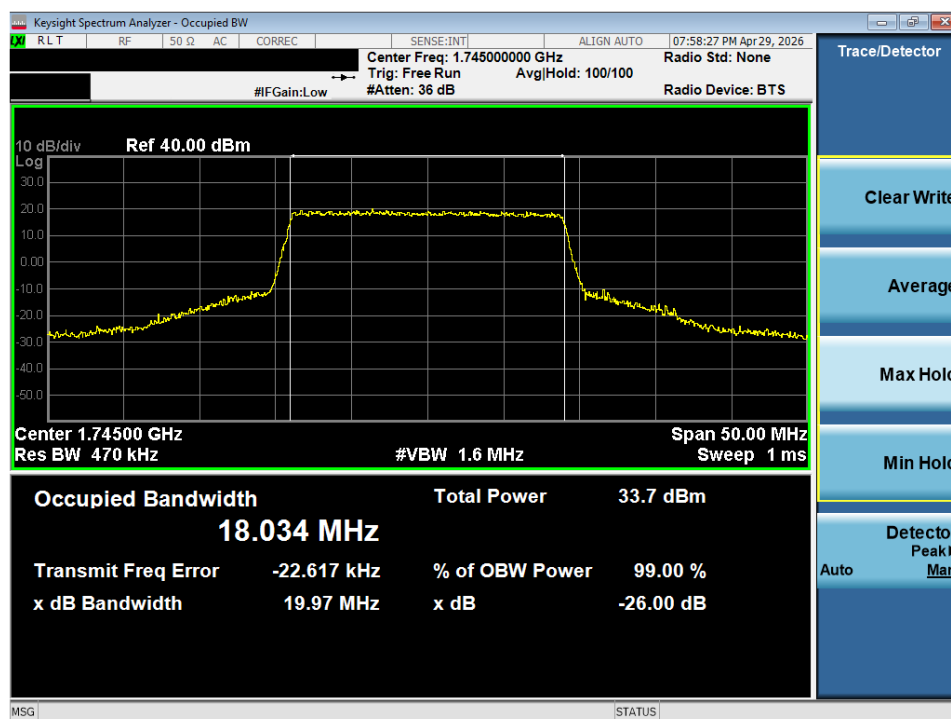

Plot 9-3. Occupied Bandwidth (Spot-check) – LTE Band B66/4

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 184 of 186

Radiated Spot-Checks – Model: SC-55G

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	711.00	V	157	256	1.12	1 / 49	21.78	20.75	0.119	34.77	-14.02

Table 9-4. EIRP Measurements (Spot-check) – LTE Band B12

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	782.00	H	243	269	1.27	1 / 25	20.88	20.00	0.100	34.77	-14.77

Table 9-5. EIRP Measurements (Spot-check) – LTE Band B13

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1745.00	H	145	356	3.13	1 / 99	18.60	21.73	0.149	30.00	-8.27

Table 9-6. EIRP Measurements (Spot-check) – LTE Band B64/4

Bandwidth (MHz):	10
Frequency (MHz):	782
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1564.00	H	166	45	-59.35	-1.05	46.60	-48.66	-40.00	-8.66
2346.00	H	114	351	-55.34	3.23	54.89	-40.37	-13.00	-27.37

Table 9-7. Radiated Spurious Measurements (Spot-check) – LTE Band B13

Bandwidth (MHz):	20
Frequency (MHz):	1745
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
235.00	H	116	337	-54.23	3.03	55.80	-39.46	-13.00	-26.46

Table 9-8. Radiated Spurious Measurements (Spot-check) – LTE Band B66/4

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 185 of 186

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: A3LSMF776U	Variant Model: A3LSMF776JPN	Deviation (dB)	Max Deviation (dB)	Pass/Fail
27	Conducted Output Power	High Ch. 23130, 10MHz, QPSK, Ant A	dBm	N/A	24.51	24.96	0.45	1	PASS
	Occupied Bandwidth	Mid Ch. 23095, 10MHz, QPSK, Ant A	MHz	N/A	9.05	9.05	0.00	N/A	PASS
	ERP	High Ch. 23130, 10MHz, QPSK, Ant A	dBm	34.77	20.61	20.75	0.14	3	PASS

Table 9-9. Summary of Spot-checks – LTE Band B12

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: A3LSMF776U	Variant Model: A3LSMF776JPN	Deviation (dB)	Max Deviation (dB)	Pass/Fail
27	Conducted Output Power	Mid Ch. 23230, 10MHz, QPSK, Ant A	dBm	N/A	24.56	24.69	0.13	1	PASS
	Occupied Bandwidth	Mid Ch. 23230, 10MHz, QPSK, Ant A	MHz	N/A	9.04	9.04	0.00	N/A	PASS
	ERP	Mid Ch. 23230, 10MHz, QPSK, Ant A	dBm	34.77	19.92	20.00	0.08	3	PASS
	RSE	Mid Ch. 23230, 10MHz, QPSK, 1564MHz, Ant E	dBm	-40	-47.53	-48.66	-1.13	3	PASS
	RSE	Mid Ch. 23230, 10MHz, QPSK, 2346MHz, Ant E	dBm	-13	-38.36	-40.37	-2.01	3	PASS

Table 9-10. Summary of Spot-checks – LTE Band B13

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: A3LSMF776U	Variant Model: A3LSMF776JPN	Deviation (dB)	Max Deviation (dB)	Pass/Fail
27	Conducted Output Power	Mid Ch. 132322, 20MHz, QPSK, Ant B	dBm	N/A	24.61	24.13	-0.48	1	PASS
	Occupied Bandwidth	Mid Ch. 132322, 20MHz, QPSK, Ant B	MHz	N/A	18.01	18.03	0.02	N/A	PASS
	EIRP	Mid Ch. 132322, 20MHz, QPSK, Ant B	dBm	30	22.58	21.73	-0.85	3	PASS
	RSE	Mid Ch. 132322, 20MHz, QPSK, 5235MHz, Ant H	dBm	-13	-37.80	-39.46	-1.66	3	PASS

Table 9-11. Summary of Spot-checks – LTE Band B66/4

- END OF TEST REPORT -

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/14/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-03-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 186 of 186