



NR Band n41 – Default – Ant1

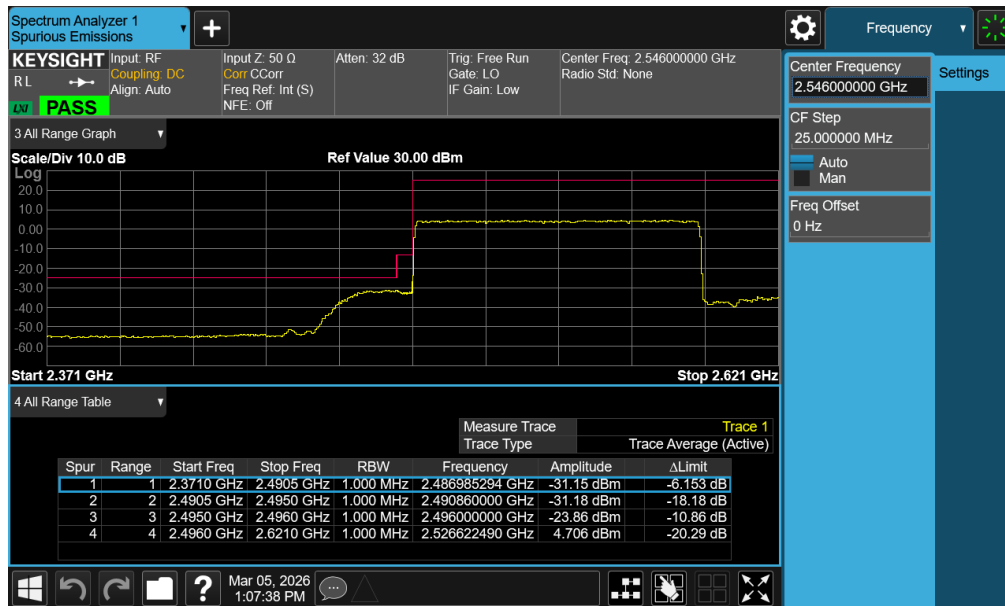



Plot 7-129. Lower ACP Plot (NR Band n41PC2 - 100MHz CP-OFDM-QPSK – Full RB - Ant1)

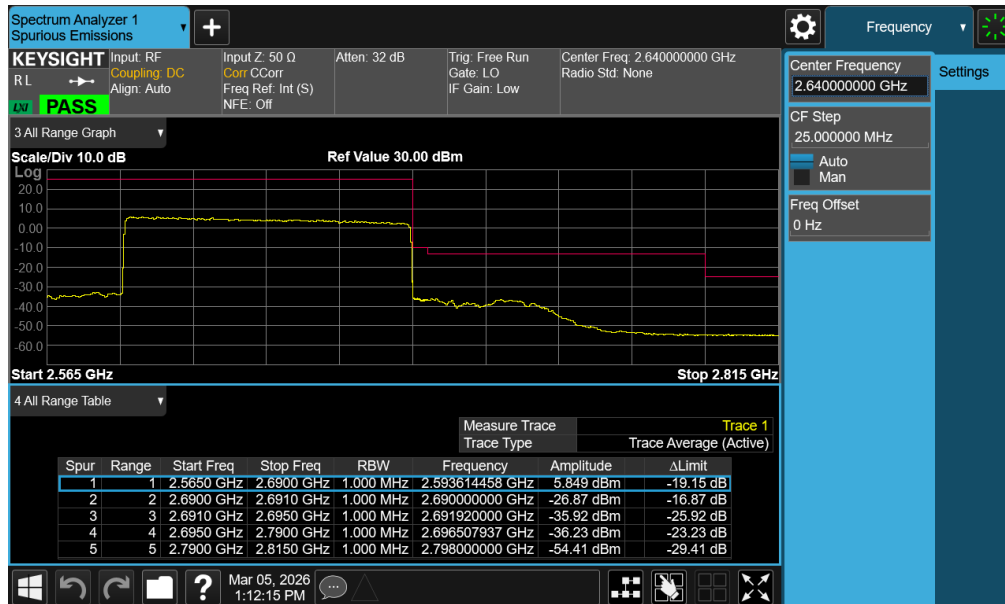

Plot 7-130. Upper ACP Plot (NR Band n41PC2 - 100MHz CP-OFDM-QPSK – Full RB - Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 106 of 145		

NR Band n41 – Tx Hopping – Ant1

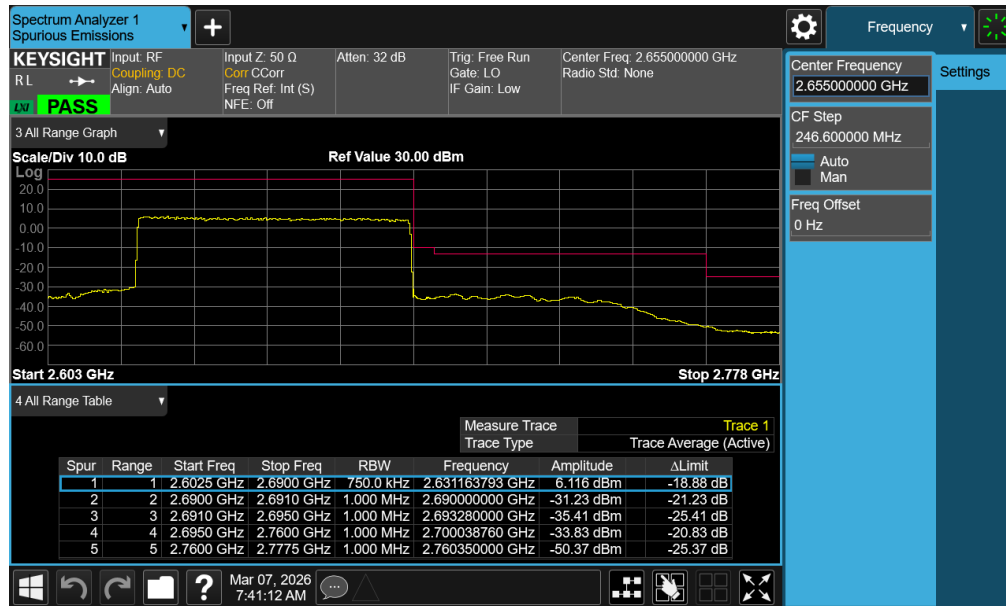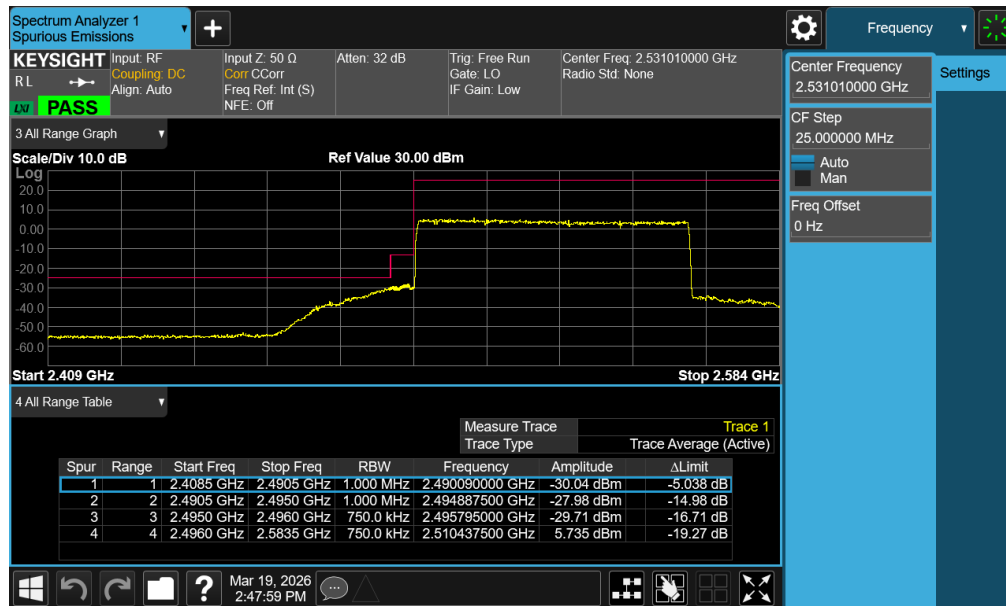


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 107 of 145

Mode	Bandwidth	Channel	Test Case	Level [dBm]	Limit [dBm]	Margin [dB]
ULCA LTE-B41PC3	20+20MHz	Low	Band Edge	-28.20	-25	-3.20
		High	Band Edge	-37.77	-25	-12.77
LTE-B41PC3	20MHz	Low	Band Edge	-35.25	-25	-10.25
		High	Band Edge	-38.36	-25	-13.36
	15MHz	Low	Band Edge	-36.32	-25	-11.32
		High	Band Edge	-37.60	-25	-12.60
	10MHz	Low	Band Edge	-35.09	-25	-10.09
		High	Band Edge	-37.61	-25	-12.61
	5MHz	Low	Band Edge	-36.28	-25	-11.28
		High	Band Edge	-39.00	-25	-14.00


Table 7-21. Conducted Band Edge Test Results – LTE – Ant 2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 108 of 145

ULCA LTE Band 41(PC3)– Ant 2

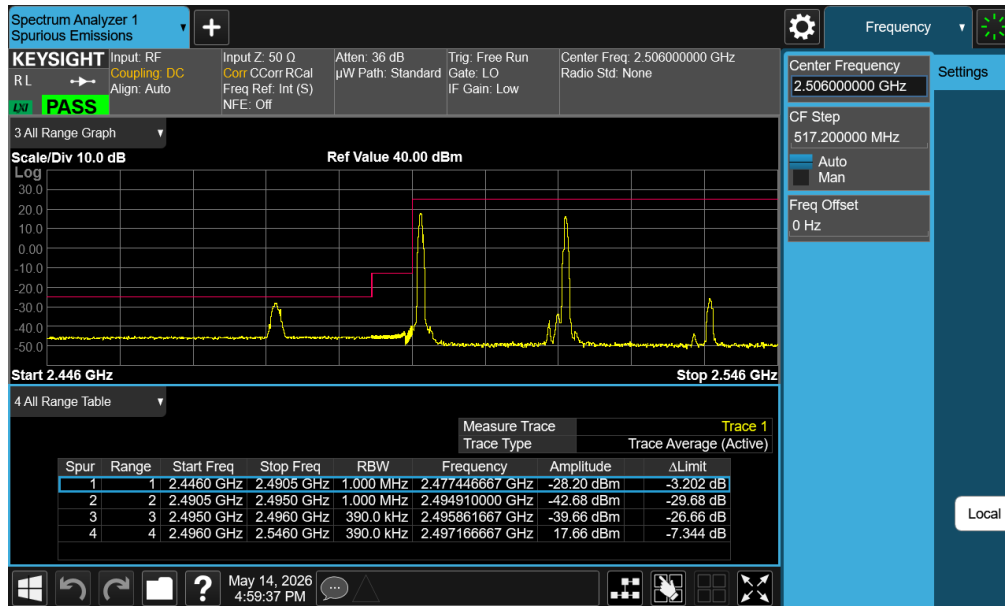


Plot 7-133. Lower ACP Plot (ULCA LTE Band 41(PC3)- 20+20MHz QPSK – 1 RB - Ant 2)

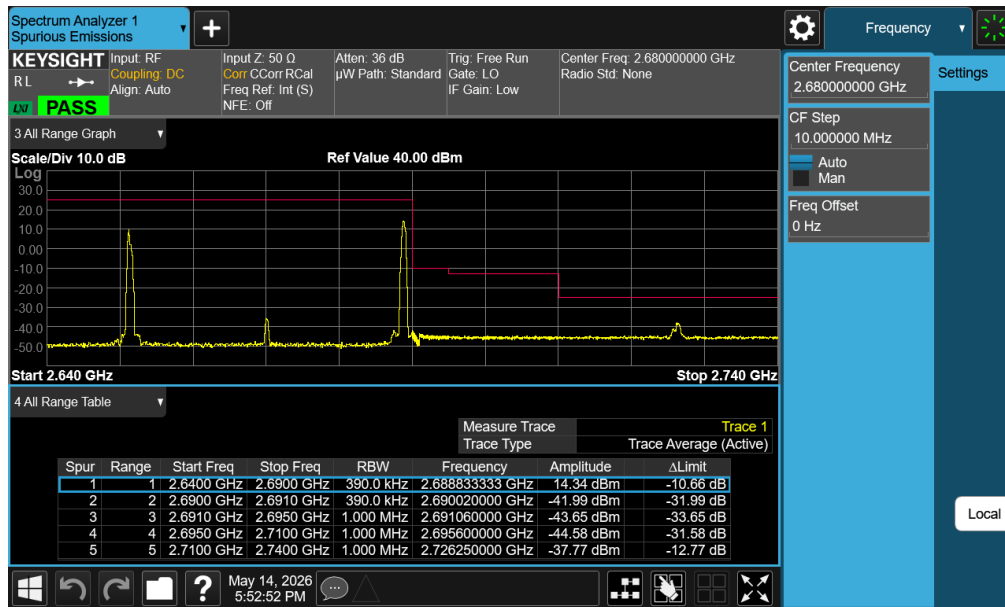


Plot 7-134. Upper ACP Plot (ULCA LTE Band 41(PC3)- 20+20MHz QPSK – 1 RB - Ant 2)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 109 of 145		

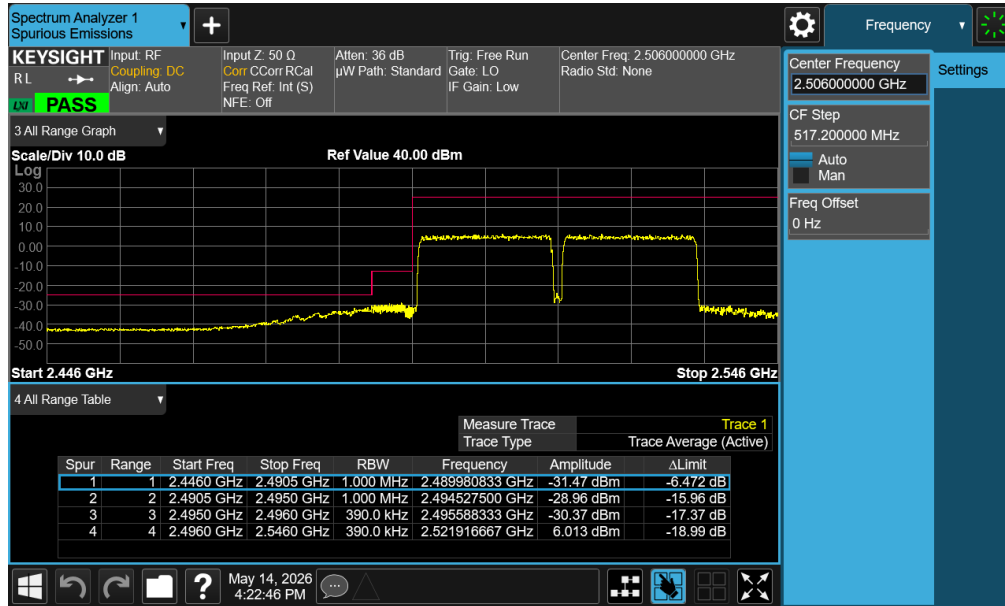


Plot 7-135. Lower ACP Plot (ULCA LTE Band 41(PC3)- 20+20MHz QPSK – Full RB - Ant 2)

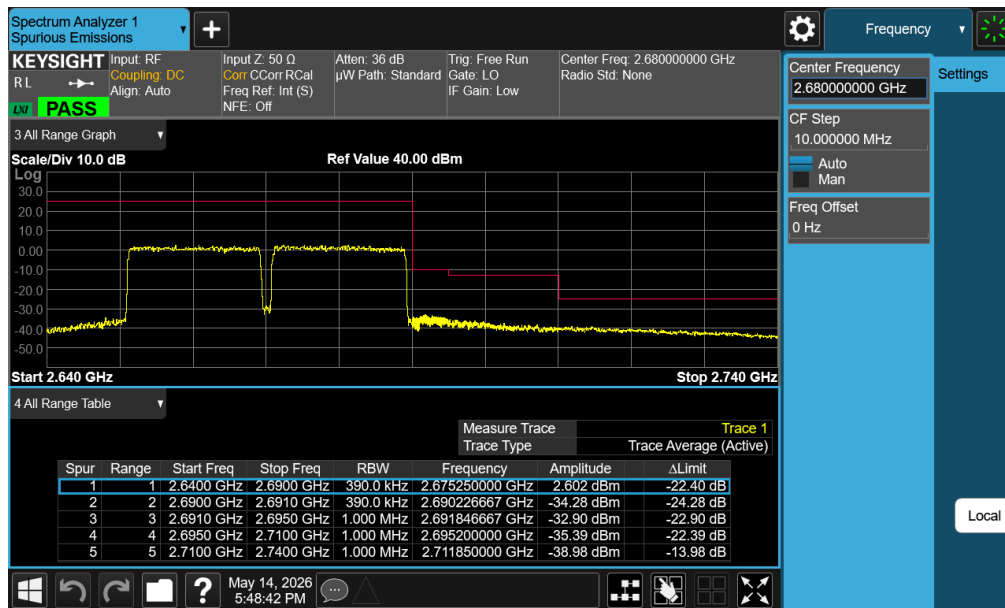


Plot 7-136. Upper ACP Plot (ULCA LTE Band 41(PC3)- 20+20MHz QPSK – Full RB - Ant 2)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 110 of 145

LTE Band 41(PC3) – Ant2

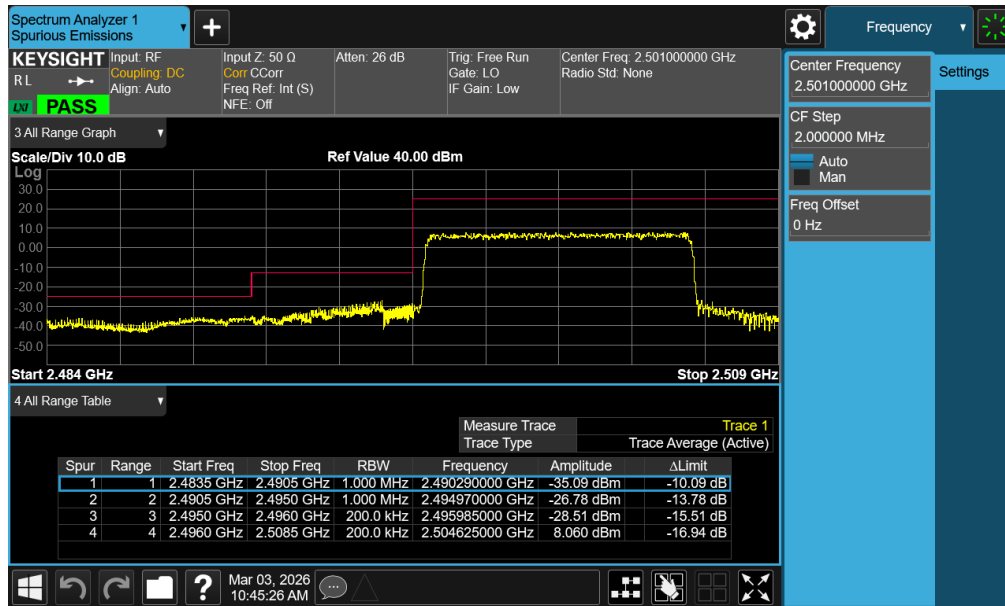

Plot 7-137. Lower ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB - Ant2)

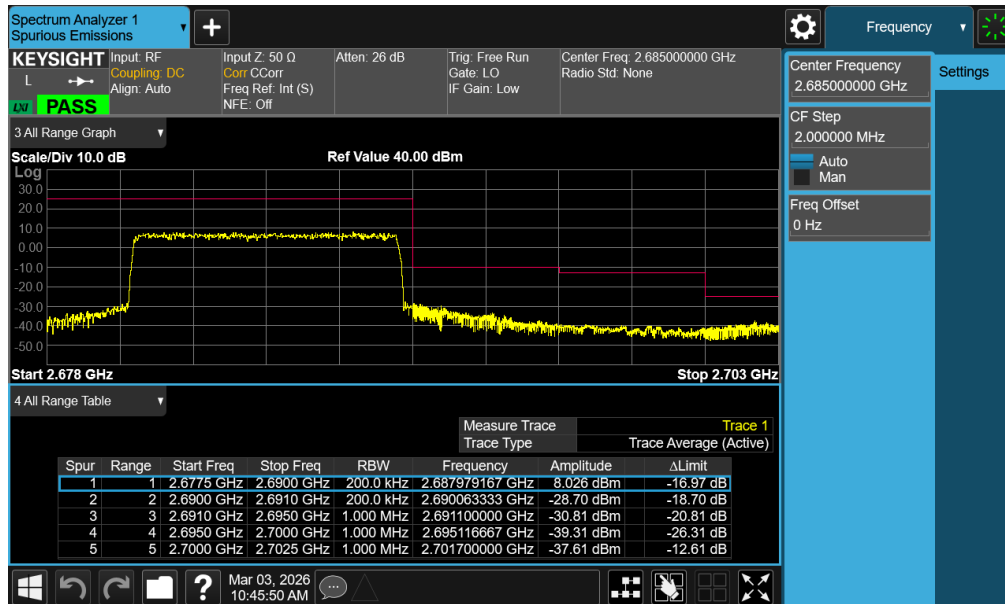

Plot 7-138. Upper ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB - Ant2)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 111 of 145		

7.6 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26:2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26:2015 – Section 5.2.4.4

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 112 of 145

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

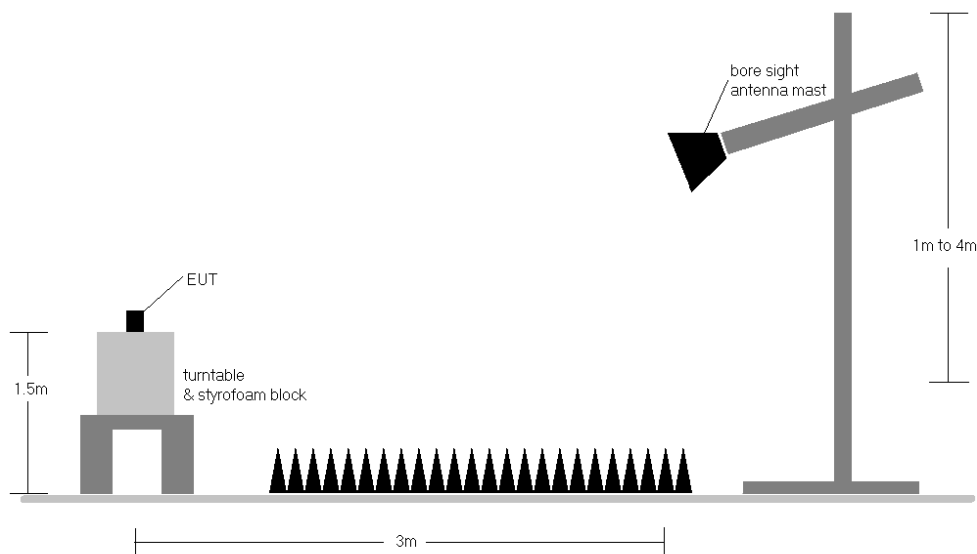


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 113 of 145

Bandwidth	Modulation	PCC			SCC			Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degrees]	Ant. Gain [dBi]	Substitute Level [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
		Bandwidth [MHz]	Frequency [MHz]	RB / Offset	Bandwidth [MHz]	Frequency [MHz]	RB / Offset								
40 MHz	QPSK	20	2506.0	1 / 99	20	2525.8	1 / 0	H	127	209	4.08	-23.73	21.89	33.01	-11.12
		20	2593.0	1 / 99	20	2612.8	1 / 0	H	124	161	4.32	-22.92	21.43	33.01	-11.58
		20	2680.0	1 / 0	20	2660.2	1 / 99	H	115	169	4.53	-22.43	21.65	33.01	-11.36
	QPSK	20	2506	100 / 0	20	2525.8	100 / 0	H	127	209	4.08	-23.73	20.05	33.01	-12.96
	16-QAM	20	2506	100 / 0	20	2525.8	100 / 0	H	127	209	4.08	-23.73	18.60	33.01	-14.41

Table 7-22. EIRP Data (ULCA LTE Band 41(PC3)) – Ant1

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2506.0	H	135	208	4.12	1 / 99	17.98	22.10	0.162	33.01	-10.91
	QPSK	2593.0	H	120	205	4.35	1 / 0	18.79	23.14	0.206	33.01	-9.87
	QPSK	2680.0	H	141	206	4.50	1 / 0	16.54	21.04	0.127	33.01	-11.97
	16-QAM	2506.0	H	135	208	4.12	1 / 99	17.00	21.12	0.129	33.01	-11.89
	16-QAM	2593.0	H	120	205	4.35	1 / 0	17.93	22.28	0.169	33.01	-10.73
	16-QAM	2680.0	H	141	206	4.50	1 / 0	16.14	20.64	0.116	33.01	-12.37
15 MHz	QPSK	2503.5	H	135	208	4.14	1 / 37	18.07	22.21	0.166	33.01	-10.80
	QPSK	2593.0	H	120	205	4.35	1 / 37	18.77	23.12	0.205	33.01	-9.89
	QPSK	2682.5	H	141	206	4.49	1 / 0	16.00	20.49	0.112	33.01	-12.52
	16-QAM	2503.5	H	135	208	4.14	1 / 74	17.01	21.15	0.130	33.01	-11.86
	16-QAM	2593.0	H	120	205	4.35	1 / 0	17.93	22.28	0.169	33.01	-10.73
	16-QAM	2682.5	H	141	206	4.49	1 / 0	16.12	20.61	0.115	33.01	-12.40
10 MHz	QPSK	2501.0	H	135	208	4.16	1 / 0	17.98	22.14	0.164	33.01	-10.87
	QPSK	2593.0	H	120	205	4.35	1 / 0	18.89	23.24	0.211	33.01	-9.77
	QPSK	2685.0	H	141	206	4.49	1 / 25	16.57	21.06	0.128	33.01	-11.95
	16-QAM	2501.0	H	135	208	4.16	1 / 49	16.87	21.03	0.127	33.01	-11.98
	16-QAM	2593.0	H	120	205	4.35	1 / 0	17.82	22.17	0.165	33.01	-10.84
	16-QAM	2685.0	H	141	206	4.49	1 / 25	16.15	20.64	0.116	33.01	-12.37
5 MHz	QPSK	2498.5	H	135	208	4.17	1 / 12	18.06	22.23	0.167	33.01	-10.78
	QPSK	2593.0	H	120	205	4.35	1 / 0	18.75	23.10	0.204	33.01	-9.91
	QPSK	2687.5	H	141	206	4.48	1 / 12	16.37	20.85	0.122	33.01	-12.16
	16-QAM	2498.5	H	135	208	4.17	1 / 0	16.95	21.12	0.129	33.01	-11.89
	16-QAM	2593.0	H	120	205	4.35	1 / 0	17.94	22.29	0.170	33.01	-10.72
	16-QAM	2687.5	H	141	206	4.48	1 / 0	16.32	20.80	0.120	33.01	-12.21
20 MHz	Opposite Pol.	2593.0	V	126	275	4.35	1/50	17.00	21.35	0.137	33.01	-11.66
	WCP	2593.0	H	113	210	4.35	1/0	14.99	19.34	0.086	33.01	-13.67

Table 7-23. EIRP Data (LTE Band 41(PC3)) – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 114 of 145

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [V/V]	Antenna Height [m]	Tunable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Subcarrier Level [dBm]	ERP [dBm]	ERP [Watt]	ERP Limit [dBm]	Margin [dB]
100 MHz	m2 BPSK	2546.01	H	129	207	4.25	1 / 136	20.27	24.52	0.283	33.01	-8.49
	m2 BPSK	2552.99	H	123	205	4.35	1 / 1	20.94	25.19	0.331	33.01	-7.82
	m2 BPSK	2640.00	H	122	205	4.60	1 / 136	19.82	24.32	0.271	33.01	-8.69
	QPSK	2546.01	H	129	207	4.25	1 / 136	20.35	24.60	0.288	33.01	-8.41
	QPSK	2552.99	H	123	205	4.35	1 / 1	20.72	25.07	0.322	33.01	-7.94
	QPSK	2640.00	H	122	205	4.56	1 / 136	19.64	24.14	0.260	33.01	-8.87
	16-QAM	2546.01	H	129	207	4.25	1 / 136	19.28	23.53	0.225	33.01	-9.48
	16-QAM	2552.99	H	123	205	4.35	1 / 1	19.91	24.26	0.267	33.01	-8.75
	16-QAM	2640.00	H	122	205	4.50	1 / 136	18.65	23.15	0.207	33.01	-9.86
	m2 BPSK	2541.00	H	129	207	4.22	1 / 1	20.29	24.51	0.282	33.01	-8.50
90 MHz	m2 BPSK	2552.99	H	123	205	4.35	1 / 243	20.81	25.16	0.328	33.01	-7.85
	m2 BPSK	2644.98	H	122	205	4.51	1 / 243	19.97	24.48	0.281	33.01	-8.53
	QPSK	2541.00	H	129	207	4.22	1 / 1	20.45	24.67	0.293	33.01	-8.34
	QPSK	2552.99	H	123	205	4.35	1 / 243	20.88	25.03	0.319	33.01	-7.98
	QPSK	2644.98	H	122	205	4.51	1 / 122	19.71	24.22	0.265	33.01	-8.79
	16-QAM	2541.00	H	129	207	4.22	1 / 1	19.16	23.38	0.218	33.01	-9.63
	16-QAM	2552.99	H	123	205	4.35	1 / 243	19.14	24.69	0.257	33.01	-9.92
	16-QAM	2644.98	H	122	205	4.51	1 / 122	18.64	23.15	0.207	33.01	-9.88
	m2 BPSK	2536.02	H	129	207	4.19	1 / 1	20.25	24.44	0.278	33.01	-8.57
	m2 BPSK	2552.99	H	123	205	4.35	1 / 215	20.81	25.16	0.328	33.01	-7.85
80 MHz	m2 BPSK	2649.99	H	122	205	4.52	1 / 215	19.93	24.45	0.276	33.01	-8.56
	QPSK	2536.02	H	129	207	4.19	1 / 1	20.29	24.48	0.280	33.01	-8.53
	QPSK	2552.99	H	123	205	4.35	1 / 215	20.57	24.92	0.311	33.01	-8.09
	QPSK	2649.99	H	122	205	4.52	1 / 215	19.67	24.19	0.263	33.01	-8.82
	16-QAM	2536.02	H	129	207	4.19	1 / 1	19.52	23.41	0.219	33.01	-9.60
	16-QAM	2552.99	H	123	205	4.35	1 / 215	19.70	24.05	0.254	33.01	-9.58
	16-QAM	2649.99	H	122	205	4.52	1 / 215	18.65	23.17	0.208	33.01	-9.84
	m2 BPSK	2531.01	H	129	207	4.16	1 / 1	20.36	24.42	0.277	33.01	-8.59
	m2 BPSK	2552.99	H	123	205	4.35	1 / 187	20.80	25.15	0.328	33.01	-7.86
	m2 BPSK	2650.98	H	122	205	4.51	1 / 187	19.89	24.39	0.275	33.01	-8.62
70 MHz	QPSK	2531.01	H	129	207	4.16	1 / 1	20.31	24.47	0.280	33.01	-8.54
	QPSK	2552.99	H	123	205	4.35	1 / 187	20.64	24.99	0.316	33.01	-8.02
	QPSK	2650.98	H	122	205	4.51	1 / 187	19.62	24.12	0.258	33.01	-8.89
	16-QAM	2531.01	H	129	207	4.16	1 / 1	19.24	23.40	0.219	33.01	-9.64
	16-QAM	2552.99	H	123	205	4.35	1 / 94	19.59	23.94	0.248	33.01	-9.07
	16-QAM	2650.98	H	122	205	4.51	1 / 187	18.48	22.98	0.199	33.01	-10.03
	m2 BPSK	2528.00	H	129	207	4.12	1 / 1	20.11	24.23	0.285	33.01	-8.78
	m2 BPSK	2552.99	H	123	205	4.35	1 / 160	20.67	25.02	0.316	33.01	-7.96
	m2 BPSK	2659.98	H	122	205	4.49	1 / 160	19.48	23.97	0.250	33.01	-9.04
	QPSK	2528.00	H	129	207	4.12	1 / 1	19.06	23.18	0.208	33.01	-9.83
60 MHz	16-QAM	2552.99	H	123	205	4.35	1 / 160	19.51	23.86	0.243	33.01	-9.15
	16-QAM	2659.98	H	122	205	4.49	1 / 160	18.44	22.93	0.197	33.01	-10.08
	m2 BPSK	2531.02	H	129	207	4.08	1 / 1	20.42	24.50	0.282	33.01	-8.51
	m2 BPSK	2552.99	H	123	205	4.35	1 / 131	20.92	25.27	0.337	33.01	-7.74
	m2 BPSK	2664.99	H	122	205	4.51	1 / 66	20.00	24.51	0.283	33.01	-8.50
	QPSK	2521.02	H	129	207	4.08	1 / 1	20.48	24.56	0.286	33.01	-8.45
	QPSK	2552.99	H	123	205	4.35	1 / 131	20.68	25.03	0.319	33.01	-7.98
	QPSK	2664.99	H	122	205	4.51	1 / 66	19.65	24.16	0.261	33.01	-8.85
	16-QAM	2521.02	H	129	207	4.08	1 / 1	19.27	23.35	0.216	33.01	-9.66
	16-QAM	2552.99	H	123	205	4.35	1 / 131	19.78	24.13	0.259	33.01	-8.88
50 MHz	16-QAM	2664.99	H	122	205	4.51	1 / 66	18.62	23.13	0.206	33.01	-9.88
	m2 BPSK	2518.50	H	129	207	4.08	1 / 1	20.33	24.41	0.276	33.01	-8.60
	m2 BPSK	2552.99	H	123	205	4.35	1 / 117	20.88	25.23	0.334	33.01	-7.78
	m2 BPSK	2667.50	H	122	205	4.52	1 / 99	19.64	24.36	0.273	33.01	-8.65
	QPSK	2518.50	H	129	207	4.08	1 / 1	20.42	24.50	0.282	33.01	-8.51
	QPSK	2552.99	H	123	205	4.35	1 / 117	20.63	24.98	0.315	33.01	-8.03
	QPSK	2667.50	H	122	205	4.52	1 / 99	19.55	24.07	0.256	33.01	-8.94
	16-QAM	2518.50	H	129	207	4.08	1 / 1	19.43	23.51	0.224	33.01	-9.50
	16-QAM	2552.99	H	123	205	4.35	1 / 117	19.81	24.16	0.261	33.01	-9.46
	16-QAM	2667.50	H	122	205	4.52	1 / 1	18.52	23.04	0.202	33.01	-9.97
45 MHz	m2 BPSK	2516.01	H	129	207	4.08	1 / 1	20.18	24.26	0.267	33.01	-8.75
	m2 BPSK	2552.99	H	123	205	4.35	1 / 104	20.70	25.05	0.320	33.01	-7.96
	m2 BPSK	2670.00	H	122	205	4.53	1 / 104	19.88	24.41	0.276	33.01	-8.60
	QPSK	2516.01	H	129	207	4.08	1 / 1	20.21	24.29	0.288	33.01	-8.72
	QPSK	2552.99	H	123	205	4.35	1 / 53	20.46	24.81	0.303	33.01	-8.20
	QPSK	2670.00	H	122	205	4.53	1 / 53	19.59	24.12	0.258	33.01	-8.89
	16-QAM	2516.01	H	129	207	4.08	1 / 1	19.14	23.22	0.210	33.01	-9.79
	16-QAM	2552.99	H	123	205	4.35	1 / 104	19.65	24.00	0.251	33.01	-9.01
	16-QAM	2670.00	H	122	205	4.53	1 / 53	18.52	23.05	0.202	33.01	-9.96
	m2 BPSK	2513.50	H	129	207	4.08	1 / 46	20.30	24.38	0.274	33.01	-8.63
35 MHz	m2 BPSK	2552.99	H	123	205	4.35	1 / 46	20.78	25.13	0.326	33.01	-7.88
	m2 BPSK	2672.50	H	122	205	4.52	1 / 46	19.99	24.51	0.283	33.01	-8.50
	QPSK	2513.50	H	129	207	4.08	1 / 1	20.39	24.47	0.280	33.01	-8.54
	QPSK	2552.99	H	123	205	4.35	1 / 46	20.52	24.67	0.307	33.01	-8.14
	QPSK	2672.50	H	122	205	4.52	1 / 90	19.71	24.23	0.265	33.01	-8.78
	16-QAM	2513.50	H	129	207	4.08	1 / 1	19.20	23.28	0.213	33.01	-9.73
	16-QAM	2552.99	H	123	205	4.35	1 / 90	19.67	24.02	0.253	33.01	-8.99
	16-QAM	2672.50	H	122	205	4.52	1 / 90	18.58	23.10	0.204	33.01	-9.91
	m2 BPSK	2511.00	H	129	207	4.08	1 / 1	20.42	24.50	0.282	33.01	-8.51
	m2 BPSK	2552.99	H	123	205	4.35	1 / 76	20.77	25.12	0.325	33.01	-7.88
m2 BPSK	2674.98	H	122	205	4.52	1 / 76	19.87	24.38	0.274	33.01	-8.63	
30 MHz	QPSK	2511.00	H	129	207	4.08	1 / 1	20.47	24.55	0.285	33.01	-8.46
	QPSK	2552.99	H	123	205	4.35	1 / 76	20.61	24.86	0.314	33.01	-8.02
	QPSK	2674.98	H	122	205	4.52	1 / 76	19.56	24.07	0.256	33.01	-9.04
	16-QAM	2511.00	H	129	207	4.08	1 / 1	19.21	23.29	0.213	33.01	-9.72
	16-QAM	2552.99	H	123	205	4.35	1 / 1	19.56	23.91	0.246	33.01	-9.10
	16-QAM	2674.98	H	122	205	4.52	1 / 1	18.53	23.04	0.202	33.01	-10.07
	m2 BPSK	2508.50	H	129	207	4.10	1 / 1	20.29	24.36	0.273	33.01	-8.65
	m2 BPSK	2552.99	H	123	205	4.35	1 / 32	20.79	25.14	0.327	33.01	-7.87
	m2 BPSK	2677.50	H	122	205	4.51	1 / 32	19.94	24.44	0.278	33.01	-8.57
	QPSK	2508.50	H	129	207	4.10	1 / 32	20.32	24.42	0.277	33.01	-8.59
25 MHz	QPSK	2552.99	H	123	205	4.35	1 / 1	20.51	24.86	0.308	33.01	-8.15
	QPSK	2677.50	H	122	205	4.51	1 / 32	19.63	24.13	0.259	33.01	-8.88
	16-QAM	2508.50	H	129	207	4.10	1 / 1	19.15	23.25	0.211	33.01	-9.76
	16-QAM	2552.99	H	123	205	4.35	1 / 1	19.56	23.91	0.246	33.01	-9.10
	16-QAM	2674.98	H	122	205	4.51	1 / 32	18.55	22.95	0.199	33.01	-10.08
	m2 BPSK	2508.02	H	129	207	4.12	1 / 32	20.29	24.32	0.270	33.01	-8.67
	m2 BPSK	2552.99	H	123	205	4.35	1 / 25	20.78	25.11	0.325	33.01	-7.90
	m2 BPSK	2679.99	H	122	205	4.50	1 / 25	19.95	24.44	0.278	33.01	-8.57
	QPSK	2508.02	H	129	207	4.12	1 / 25	20.21	24.33	0.271	33.01	-8.68
	QPSK	2552.99	H	123	205	4.35	1 / 25	20.51	24.87	0.307	33.01	-8.11
20 MHz	QPSK	2679.99	H	122	205	4.50	1 / 25	19.64	24.2			

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [dB]	Antenna Height [m]	Tunable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
100 MHz	m2 BPSK	2546.01	H	133	203	4.25	1 / 136	19.76	24.01	0.252	33.01	-8.00
	m2 BPSK	2552.99	H	159	202	4.35	1 / 136	20.96	25.31	0.340	33.01	-7.70
	m2 BPSK	2640.00	H	126	198	4.50	1 / 1	20.44	24.94	0.312	33.01	-8.07
	QPSK	2546.01	H	133	203	4.25	1 / 136	19.60	23.85	0.243	33.01	-8.16
	QPSK	2552.99	H	159	202	4.35	1 / 136	20.87	25.22	0.333	33.01	-7.79
	QPSK	2640.00	H	126	198	4.50	1 / 1	20.43	24.93	0.311	33.01	-8.08
	16-QAM	2546.01	H	133	203	4.25	1 / 136	18.62	22.87	0.194	33.01	-10.14
	16-QAM	2552.99	H	159	202	4.35	1 / 136	19.77	24.12	0.258	33.01	-8.89
	16-QAM	2640.00	H	126	198	4.50	1 / 1	19.30	23.60	0.229	33.01	-8.41
	m2 BPSK	2546.01	H	133	203	4.22	1 / 1	19.90	24.12	0.258	33.01	-8.88
	m2 BPSK	2552.99	H	159	202	4.35	1 / 122	21.03	25.38	0.345	33.01	-7.83
	m2 BPSK	2644.98	H	126	198	4.51	1 / 1	20.51	25.02	0.318	33.01	-7.99
90 MHz	QPSK	2541.00	H	133	203	4.22	1 / 1	19.50	23.72	0.235	33.01	-8.29
	QPSK	2552.99	H	159	202	4.35	1 / 122	20.86	25.21	0.332	33.01	-7.80
	QPSK	2644.98	H	126	198	4.51	1 / 1	20.47	24.98	0.315	33.01	-8.03
	16-QAM	2541.00	H	133	203	4.22	1 / 1	18.59	22.81	0.191	33.01	-10.20
	16-QAM	2552.99	H	159	202	4.35	1 / 1	19.79	24.14	0.260	33.01	-8.87
	16-QAM	2644.98	H	126	198	4.51	1 / 1	19.65	23.96	0.227	33.01	-8.45
	m2 BPSK	2536.02	H	133	203	4.19	1 / 1	19.86	24.05	0.254	33.01	-8.96
	m2 BPSK	2552.99	H	159	202	4.35	1 / 1	20.94	25.29	0.338	33.01	-7.72
	m2 BPSK	2649.99	H	126	198	4.52	1 / 1	20.33	24.85	0.306	33.01	-8.16
	QPSK	2536.02	H	133	203	4.19	1 / 1	19.36	23.55	0.226	33.01	-9.46
	QPSK	2552.99	H	159	202	4.35	1 / 1	20.79	25.14	0.327	33.01	-7.87
	QPSK	2649.99	H	126	198	4.52	1 / 1	20.24	24.76	0.300	33.01	-8.25
80 MHz	16-QAM	2536.02	H	133	203	4.19	1 / 215	18.96	22.58	0.181	33.01	-10.43
	16-QAM	2552.99	H	159	202	4.35	1 / 108	19.86	24.01	0.252	33.01	-8.00
	16-QAM	2649.99	H	126	198	4.52	1 / 1	18.86	23.38	0.218	33.01	-8.63
	m2 BPSK	2531.01	H	133	203	4.16	1 / 1	19.79	23.95	0.248	33.01	-9.06
	m2 BPSK	2552.99	H	159	202	4.35	1 / 94	20.97	25.32	0.341	33.01	-7.69
	m2 BPSK	2650.00	H	126	198	4.51	1 / 1	20.16	24.66	0.293	33.01	-8.35
	QPSK	2531.01	H	133	203	4.16	1 / 1	19.39	23.55	0.226	33.01	-9.46
	QPSK	2552.99	H	159	202	4.35	1 / 94	20.75	25.10	0.324	33.01	-7.91
	QPSK	2650.00	H	126	198	4.51	1 / 1	20.09	24.59	0.288	33.01	-8.42
	16-QAM	2531.01	H	133	203	4.16	1 / 1	18.45	22.61	0.182	33.01	-10.60
	16-QAM	2552.99	H	159	202	4.35	1 / 187	19.60	24.01	0.252	33.01	-8.00
	16-QAM	2655.00	H	126	198	4.51	1 / 1	18.71	23.21	0.210	33.01	-9.80
70 MHz	m2 BPSK	2528.00	H	133	203	4.12	1 / 1	19.89	23.81	0.240	33.01	-8.20
	m2 BPSK	2552.99	H	159	202	4.35	1 / 160	20.81	25.16	0.328	33.01	-7.85
	m2 BPSK	2659.98	H	126	198	4.49	1 / 1	20.14	24.63	0.291	33.01	-8.38
	QPSK	2528.00	H	133	203	4.12	1 / 1	19.16	23.28	0.213	33.01	-9.73
	QPSK	2552.99	H	159	202	4.35	1 / 160	20.69	25.04	0.319	33.01	-7.97
	QPSK	2659.98	H	126	198	4.49	1 / 1	20.58	24.58	0.287	33.01	-8.43
	16-QAM	2528.00	H	133	203	4.12	1 / 1	18.19	22.31	0.170	33.01	-10.70
	16-QAM	2552.99	H	159	202	4.35	1 / 81	19.65	24.00	0.251	33.01	-8.01
	16-QAM	2659.98	H	126	198	4.49	1 / 1	18.65	23.14	0.206	33.01	-9.87
	m2 BPSK	2521.02	H	133	203	4.08	1 / 1	20.04	24.12	0.258	33.01	-8.86
	m2 BPSK	2552.99	H	159	202	4.35	1 / 66	21.04	25.39	0.346	33.01	-7.62
	m2 BPSK	2664.99	H	126	198	4.51	1 / 131	20.30	24.81	0.303	33.01	-8.20
60 MHz	QPSK	2521.02	H	133	203	4.08	1 / 1	19.59	23.67	0.233	33.01	-8.34
	QPSK	2552.99	H	159	202	4.35	1 / 66	20.85	25.20	0.331	33.01	-7.81
	QPSK	2664.99	H	126	198	4.51	1 / 131	20.27	24.78	0.301	33.01	-8.23
	16-QAM	2521.02	H	133	203	4.08	1 / 1	18.71	22.79	0.190	33.01	-10.22
	16-QAM	2552.99	H	159	202	4.35	1 / 131	19.88	24.23	0.285	33.01	-8.78
	16-QAM	2664.99	H	126	198	4.51	1 / 66	18.87	23.38	0.216	33.01	-9.63
	m2 BPSK	2518.50	H	133	203	4.08	1 / 1	20.03	24.11	0.258	33.01	-8.90
	m2 BPSK	2552.99	H	159	202	4.35	1 / 59	21.07	25.42	0.349	33.01	-7.59
	m2 BPSK	2667.50	H	126	198	4.52	1 / 117	20.25	24.77	0.300	33.01	-8.24
	QPSK	2518.50	H	133	203	4.08	1 / 1	19.84	23.72	0.235	33.01	-8.29
	QPSK	2552.99	H	159	202	4.35	1 / 59	20.88	25.23	0.334	33.01	-7.78
	QPSK	2667.50	H	126	198	4.52	1 / 117	20.24	24.76	0.300	33.01	-8.25
50 MHz	16-QAM	2518.50	H	133	203	4.08	1 / 1	18.59	22.67	0.185	33.01	-10.34
	16-QAM	2552.99	H	159	202	4.35	1 / 117	19.80	24.15	0.260	33.01	-8.86
	16-QAM	2667.50	H	126	198	4.52	1 / 117	18.86	23.38	0.218	33.01	-9.63
	m2 BPSK	2516.01	H	133	203	4.08	1 / 104	19.85	23.93	0.247	33.01	-9.08
	m2 BPSK	2552.99	H	159	202	4.35	1 / 53	20.93	25.28	0.338	33.01	-7.73
	m2 BPSK	2670.00	H	126	198	4.53	1 / 104	20.35	24.58	0.287	33.01	-8.43
	QPSK	2516.01	H	133	203	4.08	1 / 104	19.40	23.48	0.223	33.01	-9.53
	QPSK	2552.99	H	159	202	4.35	1 / 53	20.75	25.10	0.324	33.01	-7.91
	QPSK	2670.00	H	126	198	4.53	1 / 53	20.02	24.55	0.285	33.01	-8.46
	16-QAM	2516.01	H	133	203	4.08	1 / 53	18.36	22.44	0.175	33.01	-10.67
	16-QAM	2552.99	H	159	202	4.35	1 / 53	19.65	24.00	0.251	33.01	-8.01
	16-QAM	2670.00	H	126	198	4.53	1 / 53	18.84	23.17	0.208	33.01	-9.84
40 MHz	m2 BPSK	2513.50	H	133	203	4.08	1 / 46	20.01	24.09	0.256	33.01	-8.92
	m2 BPSK	2552.99	H	159	202	4.35	1 / 46	21.09	25.44	0.350	33.01	-7.57
	m2 BPSK	2672.50	H	126	198	4.52	1 / 46	20.23	24.75	0.299	33.01	-8.26
	QPSK	2513.50	H	133	203	4.08	1 / 46	19.53	23.61	0.230	33.01	-9.40
	QPSK	2552.99	H	159	202	4.35	1 / 46	20.90	25.25	0.335	33.01	-7.76
	QPSK	2672.50	H	126	198	4.52	1 / 46	20.13	24.65	0.292	33.01	-8.26
	16-QAM	2513.50	H	133	203	4.08	1 / 90	18.45	22.53	0.179	33.01	-10.48
	16-QAM	2552.99	H	159	202	4.35	1 / 46	19.69	24.04	0.254	33.01	-8.97
	16-QAM	2672.50	H	126	198	4.52	1 / 90	18.68	23.20	0.209	33.01	-9.81
	m2 BPSK	2511.00	H	133	203	4.08	1 / 1	19.94	24.02	0.262	33.01	-8.89
	m2 BPSK	2552.99	H	159	202	4.35	1 / 76	21.04	25.39	0.346	33.01	-7.63
	m2 BPSK	2674.98	H	126	198	4.52	1 / 1	20.33	24.84	0.305	33.01	-8.17
35 MHz	QPSK	2511.00	H	133	203	4.08	1 / 1	19.50	23.58	0.228	33.01	-9.43
	QPSK	2552.99	H	159	202	4.35	1 / 76	20.89	25.24	0.335	33.01	-7.77
	QPSK	2674.98	H	126	198	4.52	1 / 1	20.24	24.75	0.299	33.01	-8.26
	16-QAM	2511.00	H	133	203	4.08	1 / 1	18.51	22.59	0.182	33.01	-10.42
	16-QAM	2552.99	H	159	202	4.35	1 / 76	19.92	24.27	0.268	33.01	-8.74
	16-QAM	2674.98	H	126	198	4.52	1 / 76	18.78	23.29	0.214	33.01	-9.72
	m2 BPSK	2508.50	H	133	203	4.10	1 / 1	19.99	24.09	0.256	33.01	-8.93
	m2 BPSK	2552.99	H	159	202	4.35	1 / 52	21.13	25.48	0.354	33.01	-7.53
	m2 BPSK	2677.50	H	126	198	4.51	1 / 52	20.15	24.65	0.292	33.01	-8.36
	QPSK	2508.50	H	133	203	4.10	1 / 1	19.52	23.62	0.230	33.01	-9.39
	QPSK	2552.99	H	159	202	4.35	1 / 52	20.93	25.28	0.338	33.01	-7.73
	QPSK	2677.50	H	126	198	4.51	1 / 1	20.11	24.61	0.289	33.01	-8.40
25 MHz	16-QAM	2508.50	H	133	203	4.10	1 / 1	18.54	22.64	0.184	33.01	-10.37
	16-QAM	2552.99	H	159	202	4.35	1 / 63	19.75	24.10	0.257	33.01	-8.91
	16-QAM	2677.50	H	126	198	4.51	1					

Bandwidth	Modulation	PCC			SCC			Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degrees]	Ant. Gain [dBi]	Substitute Level [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
		Bandwidth [MHz]	Frequency [MHz]	RB / Offset	Bandwidth [MHz]	Frequency [MHz]	RB / Offset								
40 MHz	QPSK	20	2506.0	1 / 99	20	2525.8	1 / 0	H	141	199	4.08	-23.73	21.47	33.01	-11.54
		20	2593.0	1 / 99	20	2612.8	1 / 0	H	143	198	4.32	-22.92	22.34	33.01	-10.67
		20	2680.0	1 / 0	20	2660.2	1 / 99	H	154	196	4.53	-22.43	20.99	33.01	-12.02
	16-QAM	20	2593	100 / 0	20	2612.8	100 / 0	H	143	198	4.32	-22.43	20.38	33.01	-12.63
		20	2593	100 / 0	20	2612.8	100 / 0	H	143	198	4.32	-22.43	19.42	33.01	-13.59
		20	2593	100 / 0	20	2612.8	100 / 0	H	143	198	4.32	-22.43	19.42	33.01	-13.59

Table 7-26. EIRP Data (ULCA LTE Band 41(PC3)) – Ant2

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2506.0	H	144	201	4.12	1 / 0	17.40	21.52	0.142	33.01	-11.49
	QPSK	2593.0	H	134	201	4.35	1 / 50	18.51	22.86	0.193	33.01	-10.15
	QPSK	2680.0	H	147	198	4.50	1 / 0	16.85	21.35	0.136	33.01	-11.66
	16-QAM	2506.0	H	144	201	4.12	1 / 0	16.71	20.83	0.121	33.01	-12.18
	16-QAM	2593.0	H	134	201	4.35	1 / 50	17.70	22.05	0.160	33.01	-10.96
	16-QAM	2680.0	H	147	198	4.50	1 / 0	16.45	20.95	0.124	33.01	-12.06
15 MHz	QPSK	2503.5	H	144	201	4.14	1 / 37	17.49	21.63	0.145	33.01	-11.38
	QPSK	2593.0	H	134	201	4.35	1 / 0	18.33	22.68	0.186	33.01	-10.33
	QPSK	2682.5	H	147	198	4.49	1 / 0	16.30	20.79	0.120	33.01	-12.22
	16-QAM	2503.5	H	144	201	4.14	1 / 37	16.78	20.92	0.124	33.01	-12.09
	16-QAM	2593.0	H	134	201	4.35	1 / 0	17.67	22.02	0.159	33.01	-10.99
	16-QAM	2682.5	H	147	198	4.49	1 / 37	16.38	20.87	0.122	33.01	-12.14
10 MHz	QPSK	2501.0	H	144	201	4.16	1 / 0	17.47	21.63	0.145	33.01	-11.38
	QPSK	2593.0	H	134	201	4.35	1 / 0	18.44	22.79	0.190	33.01	-10.22
	QPSK	2685.0	H	147	198	4.49	1 / 0	16.82	21.31	0.135	33.01	-11.70
	16-QAM	2501.0	H	144	201	4.16	1 / 25	16.69	20.85	0.122	33.01	-12.16
	16-QAM	2593.0	H	134	201	4.35	1 / 0	17.63	21.98	0.158	33.01	-11.03
	16-QAM	2685.0	H	147	198	4.49	1 / 0	16.37	20.86	0.122	33.01	-12.15
5 MHz	QPSK	2498.5	H	144	201	4.17	1 / 24	17.42	21.59	0.144	33.01	-11.42
	QPSK	2593.0	H	134	201	4.35	1 / 12	18.48	22.83	0.192	33.01	-10.18
	QPSK	2687.5	H	147	198	4.48	1 / 0	16.81	21.29	0.135	33.01	-11.72
	16-QAM	2498.5	H	144	201	4.17	1 / 12	16.84	21.01	0.126	33.01	-12.00
	16-QAM	2593.0	H	134	201	4.35	1 / 24	17.73	22.08	0.162	33.01	-10.93
	16-QAM	2687.5	H	147	198	4.48	1 / 0	16.47	20.95	0.124	33.01	-12.06
20 MHz	Opposite Pol.	2593.0	V	241	261	4.35	1/99	16.84	21.19	0.132	33.01	-11.82
	WCP	2593.0	H	143	211	4.35	1/99	16.68	21.03	0.127	33.01	-11.98

Table 7-27. EIRP Data (LTE Band 41(PC3)) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 117 of 145

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26:2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26:2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 118 of 145

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

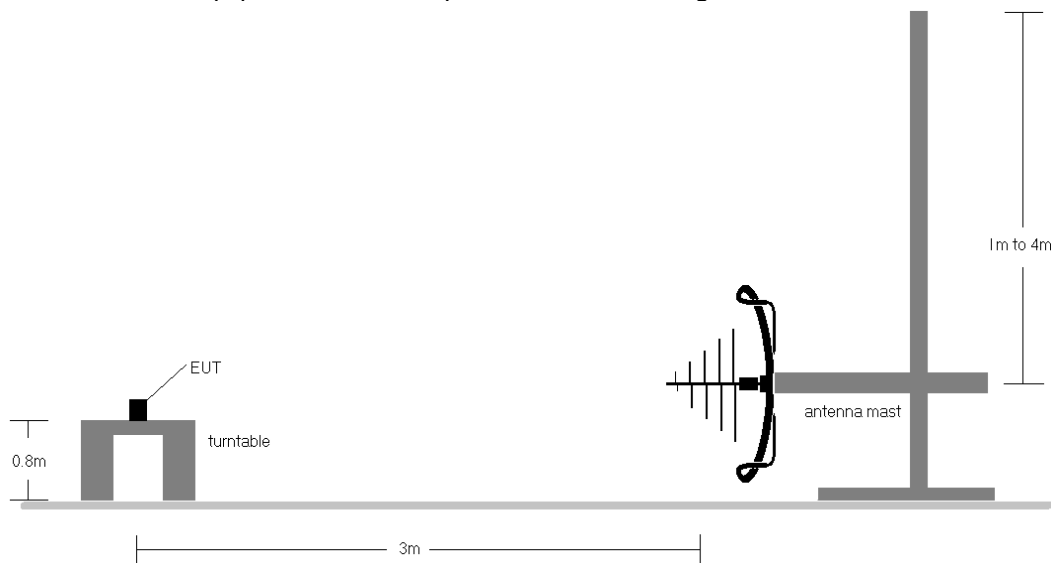


Figure 7-7. Test Instrument & Measurement Setup < 1GHz

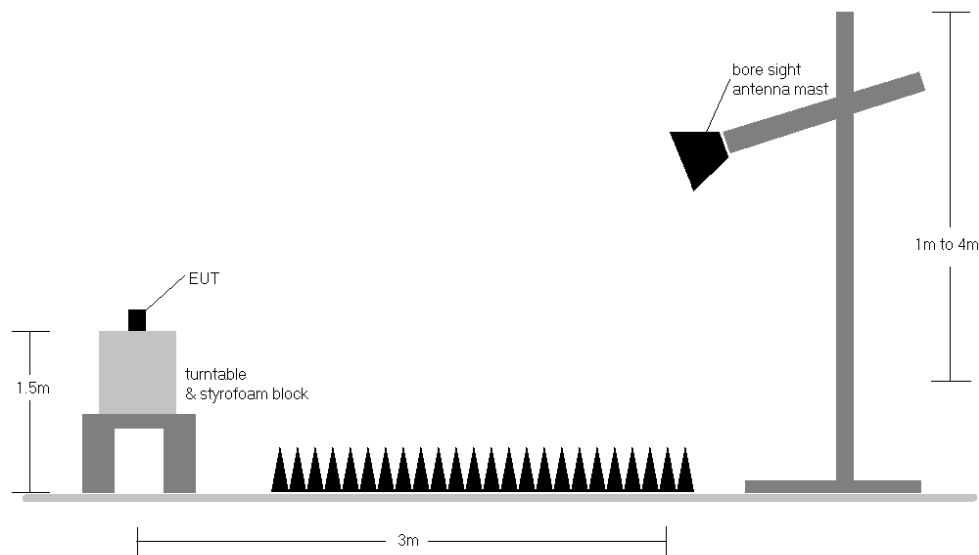


Figure 7-8. Test Instrument & Measurement Setup >1 GHz


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 119 of 145

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26:2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{ElRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 7) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 8) Spurious emission in EN-DC Operating mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor) has been checked and was found to not to be the worst case. Spurious emissions from the NR carrier device are subject to the rules under which the NR carrier operates. Spurious emissions caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 120 of 145


ULCA LTE Band 41(PC3) – Ant1

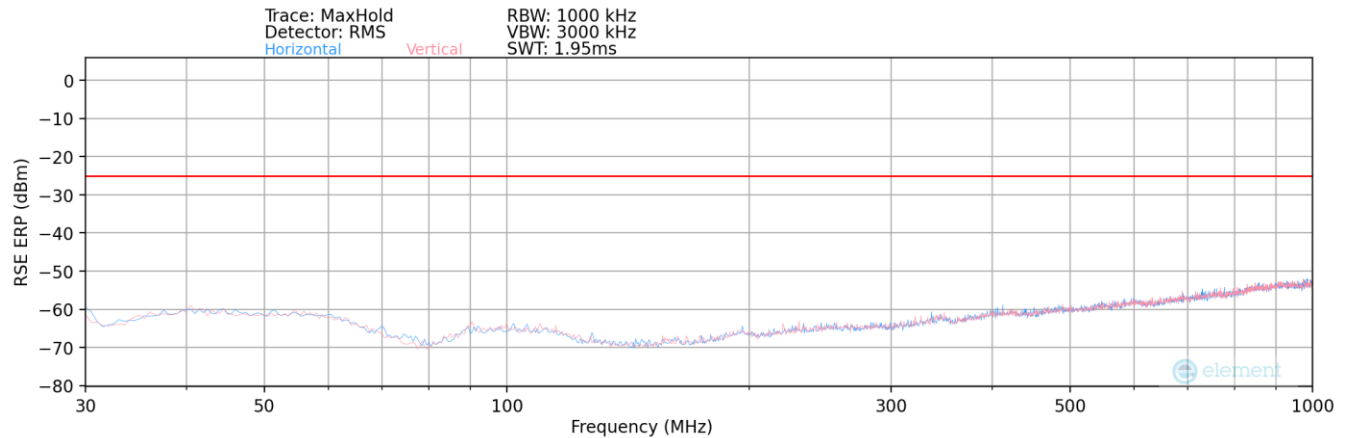

Plot 7-139. Radiated Spurious Plot (ULCA LTE Band 41(PC3) – Ant1)

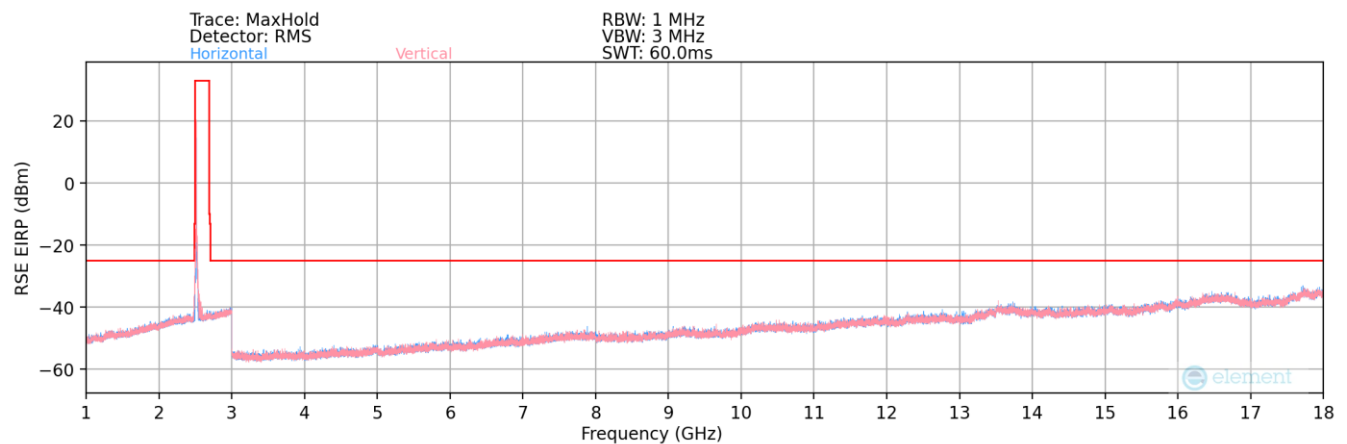


Plot 7-140. Radiated Spurious Plot (ULCA LTE Band 41(PC3)– Low Channel – Ant1)

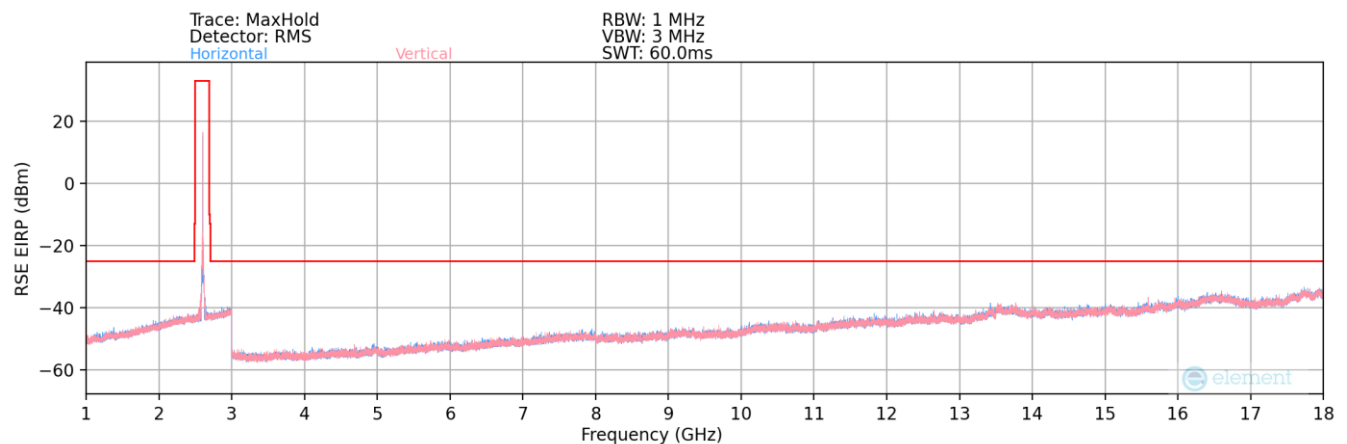

Plot 7-141. Radiated Spurious Plot (ULCA LTE Band 41(PC3)– Mid Channel – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 121 of 145

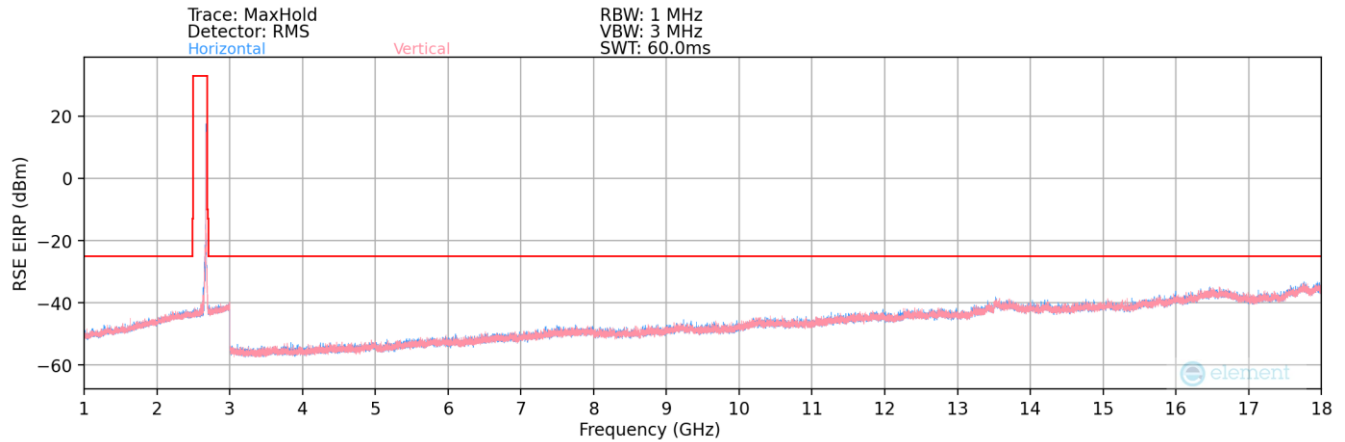

Plot 7-142. Radiated Spurious Plot (ULCA LTE Band 41(PC3)– High Channel – Ant1)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2506.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2525.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5031.80	H	-	-	-70.69	7.65	43.96	-51.30	-25.00	-26.30
7547.70	H	-	-	-71.59	13.47	48.88	-46.38	-25.00	-21.38
10063.60	H	-	-	-72.44	15.96	50.52	-44.74	-25.00	-19.74

Table 7-28. Radiated Spurious Data (ULCA LTE Band 41(PC3)– Low Channel – Ant1)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5205.80	H	-	-	-70.43	7.41	43.98	-51.28	-25.00	-26.28
7808.70	H	-	-	-71.14	13.48	49.34	-45.92	-25.00	-20.92
10411.60	H	-	-	-72.48	16.83	51.35	-43.90	-25.00	-18.90

Table 7-29. Radiated Spurious Data (ULCA LTE Band 41(PC3)– Mid Channel – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 122 of 145

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2680.0
PCC RB / Offset:	1 / 0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2660.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5340.20	H	-	-	-70.18	8.01	44.83	-50.42	-25.00	-25.42
8010.30	H	-	-	-71.88	13.56	48.68	-46.58	-25.00	-21.58
10680.40	H	-	-	-73.01	17.16	51.15	-44.10	-25.00	-19.10

Table 7-30. Radiated Spurious Data (ULCA LTE Band 41(PC3)– High Channel – Ant1)


PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
86.00	H	-	-	-57.75	-17.37	31.88	-65.53	-25.00	-40.53
191.00	H	-	-	-63.42	-14.40	29.18	-68.22	-25.00	-43.22
334.00	V	-	-	-65.40	-10.33	31.27	-66.14	-25.00	-41.14


Table 7-31. Radiated Spurious Data (ULCA LTE Band 41(PC3)– Mid Channel – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 123 of 145


LTE Band 41(PC3) – Ant1

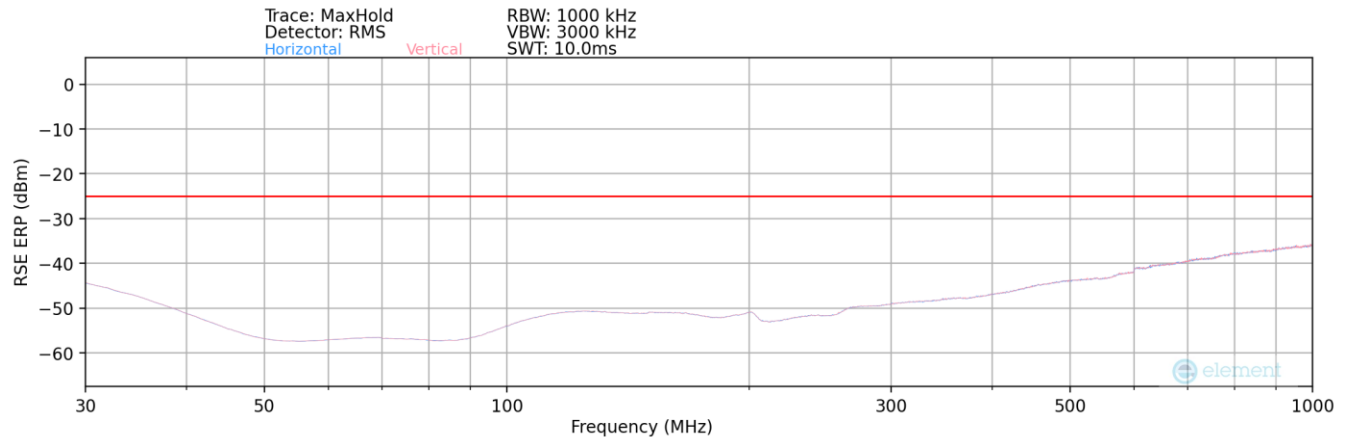

Plot 7-143. Radiated Spurious Plot (LTE Band 41(PC3)) – Ant1

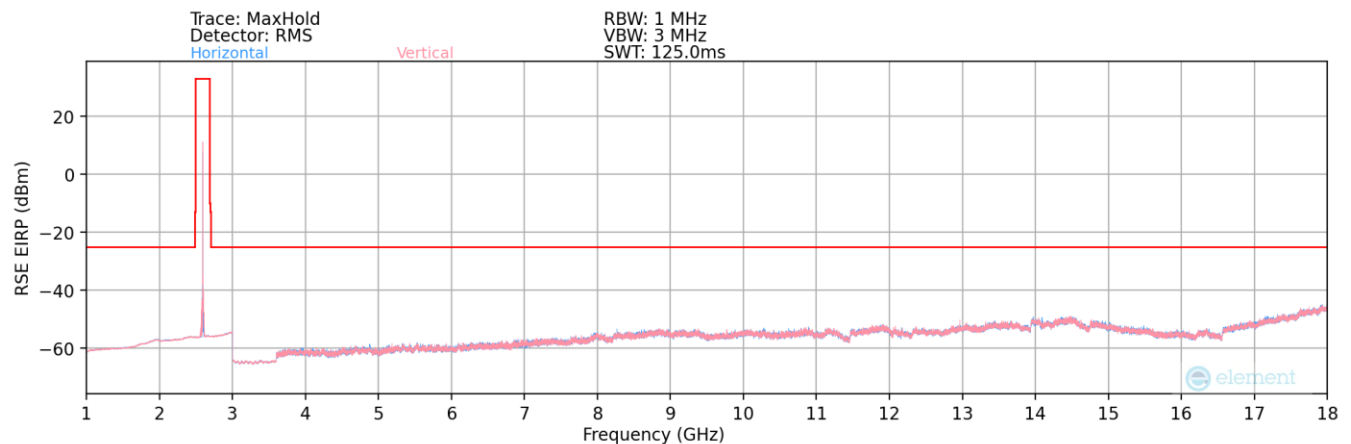

Plot 7-144. Radiated Spurious Plot (LTE Band 41(PC3)) – Ant1

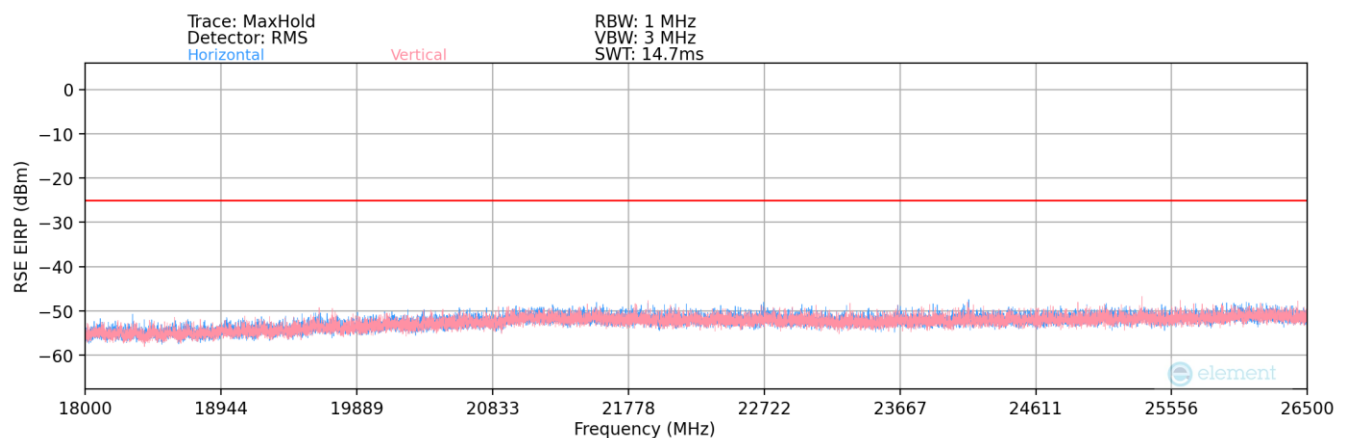

Plot 7-145. Radiated Spurious Plot (LTE Band 41(PC3)) – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 124 of 145

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
725.00	H	-	-	-80.26	28.86	55.60	-41.81	-25.00	-16.81

Table 7-32. Radiated Spurious Data (LTE Band 41(PC3)) – Ant1

Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.00	V	396	190	-70.66	-0.33	36.01	-59.25	-25.00	-34.25
7518.00	V	393	50	-69.04	4.20	42.16	-53.09	-25.00	-28.09
10024.00	V	-	-	-74.93	8.50	40.57	-54.68	-25.00	-29.68
12530.00	V	253	194	-73.23	9.13	42.90	-52.36	-25.00	-27.36
15036.00	V	-	-	-75.32	10.72	42.40	-52.86	-25.00	-27.86
17542.00	V	-	-	-75.00	14.44	46.44	-48.82	-25.00	-23.82
20048.00	V	-	-	-62.31	2.47	47.16	-57.64	-25.00	-32.64
22554.00	V	-	-	-62.24	3.48	48.23	-56.57	-25.00	-31.57

Table 7-33. Radiated Spurious Data (LTE Band 41(PC3) – Low Channel) – Ant1

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.00	V	152	247	-67.41	0.00	39.59	-55.67	-25.00	-30.67
7779.00	V	176	88	-71.25	4.76	40.51	-54.75	-25.00	-29.75
10372.00	V	-	-	-75.70	8.50	39.80	-55.45	-25.00	-30.45
12965.00	V	119	267	-73.89	9.99	43.10	-52.16	-25.00	-27.16
15558.00	V	-	-	-75.12	9.18	41.06	-54.20	-25.00	-29.20
18151.00	V	-	-	-63.98	1.18	44.20	-60.60	-25.00	-35.60
20744.00	V	-	-	-62.09	3.15	48.05	-56.75	-25.00	-31.75
23337.00	V	-	-	-62.31	3.49	48.18	-56.62	-25.00	-31.62

Table 7-34. Radiated Spurious Data (LTE Band 41(PC3) – Mid Channel) – Ant1

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.00	V	154	246	-66.68	0.82	41.14	-54.12	-25.00	-29.12
8040.00	V	123	249	-69.58	5.51	42.93	-52.33	-25.00	-27.33
10720.00	V	146	21	-74.56	8.49	40.93	-54.33	-25.00	-29.33
13400.00	V	289	221	-72.58	11.06	45.48	-49.77	-25.00	-24.77
16080.00	V	-	-	-74.94	7.65	39.71	-55.55	-25.00	-30.55
18760.00	V	-	-	-68.66	1.38	39.72	-65.08	-25.00	-40.08
21440.00	V	-	-	-73.95	3.79	36.84	-67.96	-25.00	-42.96
24120.00	V	-	-	-75.87	3.71	34.83	-69.97	-25.00	-44.97

Table 7-35. Radiated Spurious Data (LTE Band 41(PC3) – High Channel) – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 125 of 145


Case:	w/ Wireless Charging Pad
Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.00	V	153	143	-69.89	0.82	37.93	-57.33	-25.00	-32.33
8040.00	V	299	356	-69.70	5.51	42.81	-52.45	-25.00	-27.45
10720.00	V	144	46	-75.61	8.49	39.88	-55.38	-25.00	-30.38
13400.00	V	253	205	-73.26	11.06	44.80	-50.45	-25.00	-25.45
16080.00	V	-	-	-74.72	7.65	39.93	-55.33	-25.00	-30.33
18760.00	V	-	-	-72.78	1.38	35.61	-59.65	-25.00	-34.65
21440.00	V	-	-	-75.62	3.79	35.17	-60.09	-25.00	-35.09
24120.00	V	-	-	-76.51	3.71	34.20	-61.06	-25.00	-36.06


Table 7-36. Radiated Spurious Data (LTE Band 41(PC3)) – Ant1 with WCP

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 126 of 145


NR Band n41(PC2) – Default – Ant1

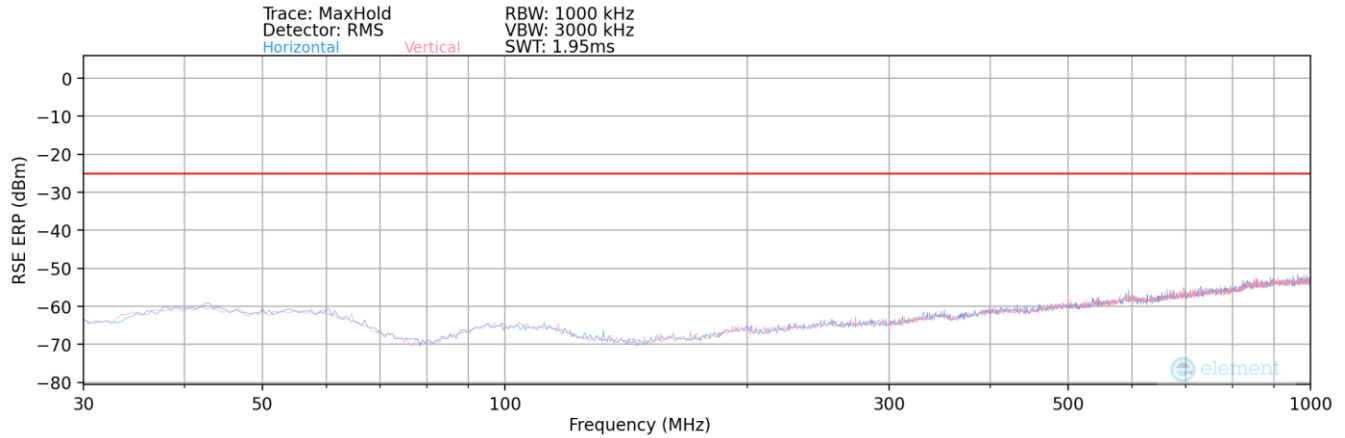

Plot 7-146. Radiated Spurious Plot (NR Band n41(PC2) – Default – Ant1)

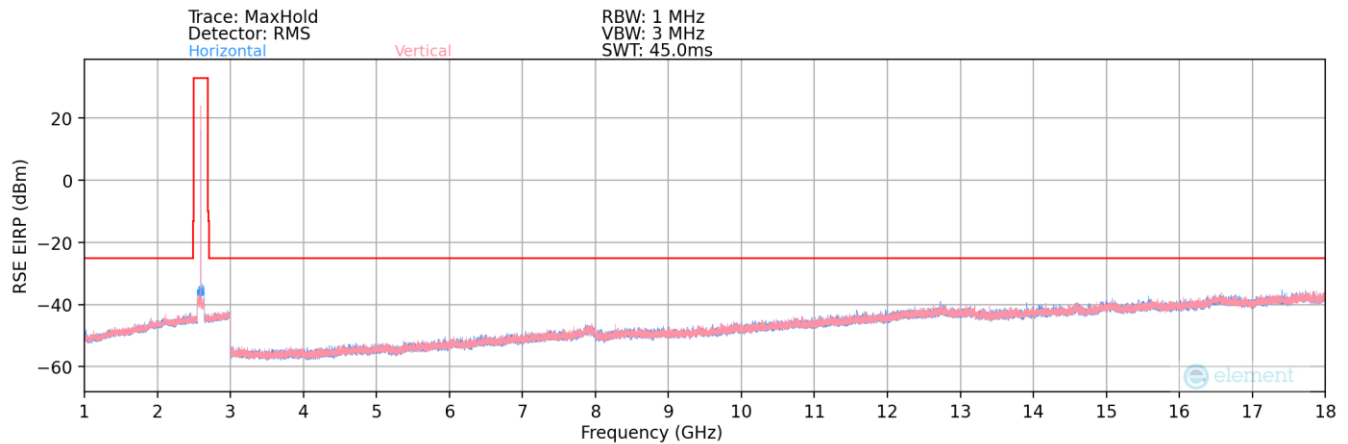

Plot 7-147. Radiated Spurious Plot (NR Band n41(PC2) – Default – Ant1)

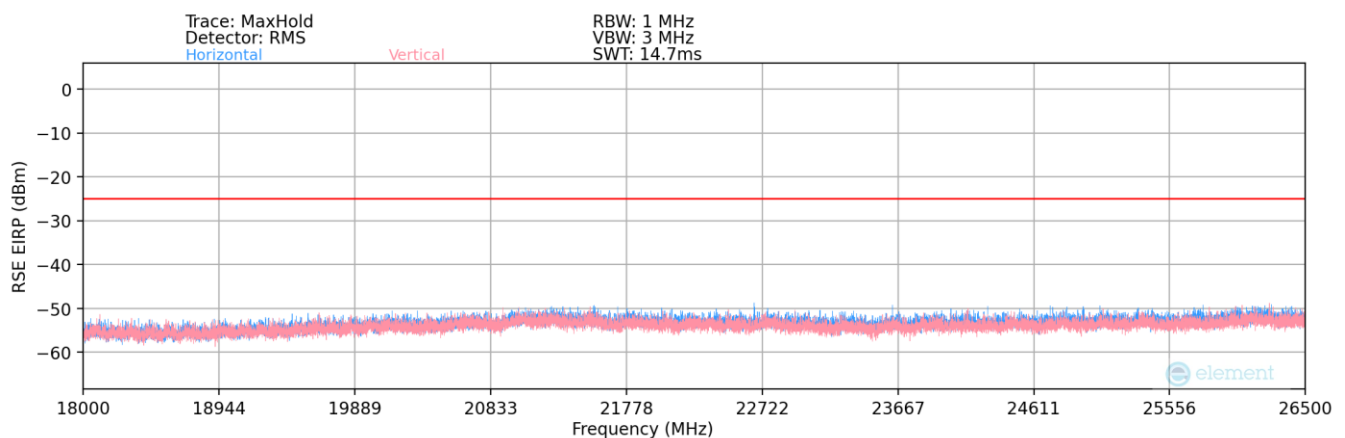

Plot 7-148. Radiated Spurious Plot NR Band n41(PC2) – Default – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 127 of 145

Bandwidth (MHz):	100
Frequency (MHz):	2592.99
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
132.76	H	-	-	-62.61	-17.23	27.16	-70.25	-25.00	-45.25

Table 7-37. Radiated Spurious Data (NR Band n41(PC2) – Default – Ant1

Bandwidth (MHz):	100
Frequency (MHz):	2546.01
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5092.02	H	-	-	-71.58	7.84	43.26	-52.00	-25.00	-27.00
7638.03	H	-	-	-72.24	12.81	47.57	-47.69	-25.00	-22.69
10184.04	H	-	-	-73.28	15.94	49.66	-45.60	-25.00	-20.60
20368.08	H	-	-	-54.61	2.85	55.24	-49.56	-25.00	-24.56
22914.09	H	-	-	-54.13	3.56	56.42	-48.38	-25.00	-23.38

Table 7-38. Radiated Spurious Data (NR Band n41(PC2) – Low Channel) – Default – Ant1

Bandwidth (MHz):	100
Frequency (MHz):	2592.99
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5185.98	H	-	-	-71.36	7.49	43.13	-52.13	-25.00	-27.13
7778.97	H	-	-	-71.93	13.11	48.18	-47.08	-25.00	-22.08
10371.96	H	-	-	-73.01	16.46	50.45	-44.81	-25.00	-19.81
18150.93	H	-	-	-54.62	1.18	53.56	-51.24	-25.00	-26.24
20743.92	H	-	-	-53.93	3.15	56.22	-48.58	-25.00	-23.58
23336.91	H	-	-	-53.52	3.49	56.97	-47.83	-25.00	-22.83

Table 7-39. Radiated Spurious Data (NR Band n41(PC2) – Mid Channel) – Default – Ant1

Bandwidth (MHz):	100
Frequency (MHz):	2640.00
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5280.00	H	-	-	-71.52	7.42	42.90	-52.36	-25.00	-27.36
7920.00	H	-	-	-72.19	14.43	49.24	-46.02	-25.00	-21.02
10560.00	H	-	-	-73.43	16.76	50.33	-44.93	-25.00	-19.93
18480.00	H	-	-	-55.16	1.21	53.05	-51.75	-25.00	-26.75
21120.00	H	-	-	-53.52	3.60	57.08	-47.72	-25.00	-22.72
23760.00	H	-	-	-53.13	3.52	57.38	-47.42	-25.00	-22.42

Table 7-40. Radiated Spurious Data (NR Band n41(PC2) – High Channel) – Default – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 128 of 145


Case:	w/ Wireless Charging Pad
Bandwidth (MHz):	100
Frequency (MHz):	2593.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5185.98	H	-	-	-71.13	7.49	43.36	-51.90	-25.00	-26.90
7778.97	H	-	-	-72.29	13.11	47.82	-47.44	-25.00	-22.44
10371.96	H	-	-	-73.43	16.46	50.03	-45.23	-25.00	-20.23


Table 7-41. Radiated Spurious Data (NR Band n41(PC2) – Default – Ant1 with WCP

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 129 of 145


NR Band n41(PC2) – Tx Hopping – Ant1

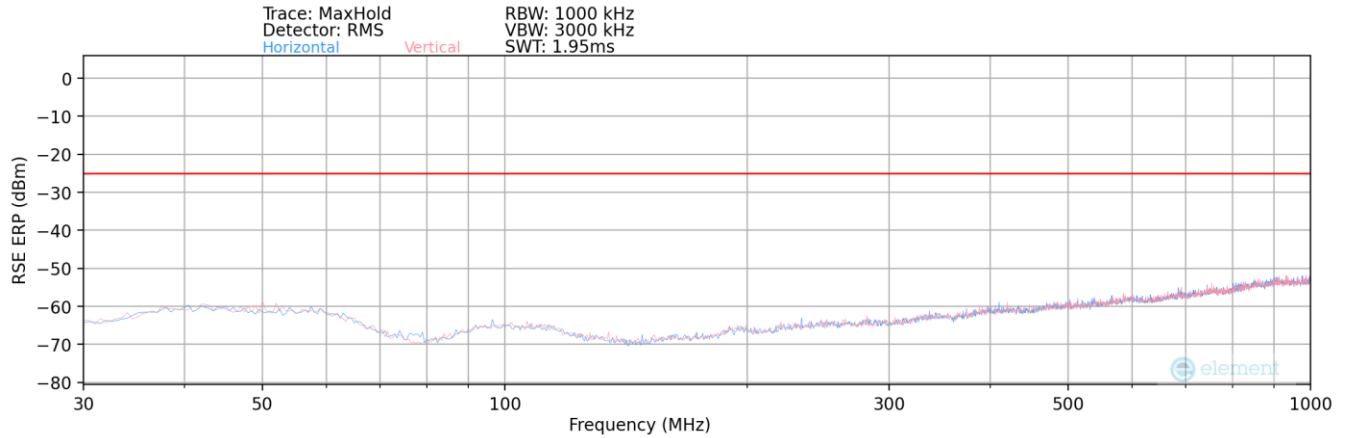

Plot 7-149. Radiated Spurious Plot (NR Band n41(PC2) – Tx Hopping – Ant1)

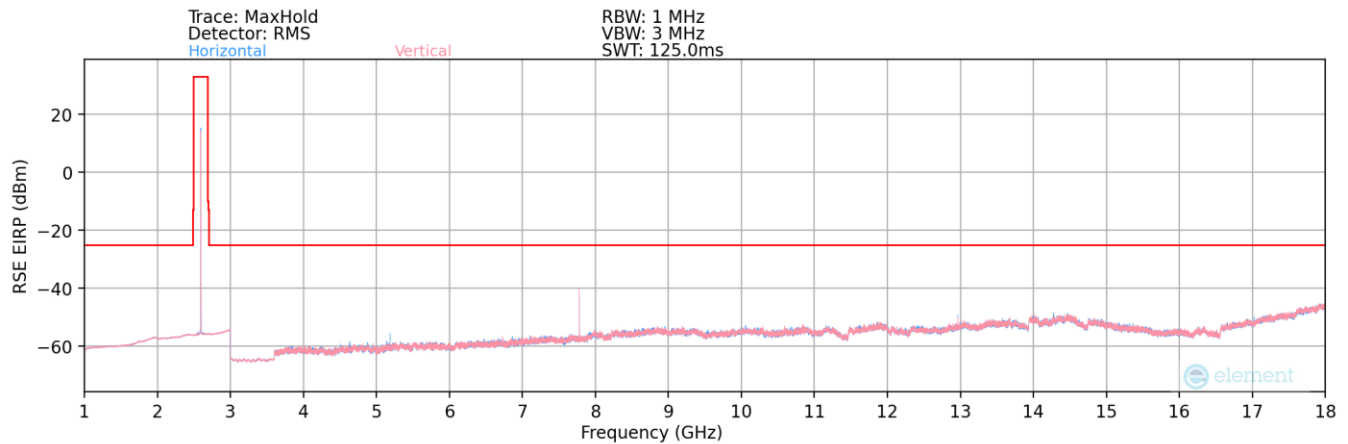

Plot 7-150. Radiated Spurious Plot (NR Band n41(PC2) – Tx Hopping – Ant1)

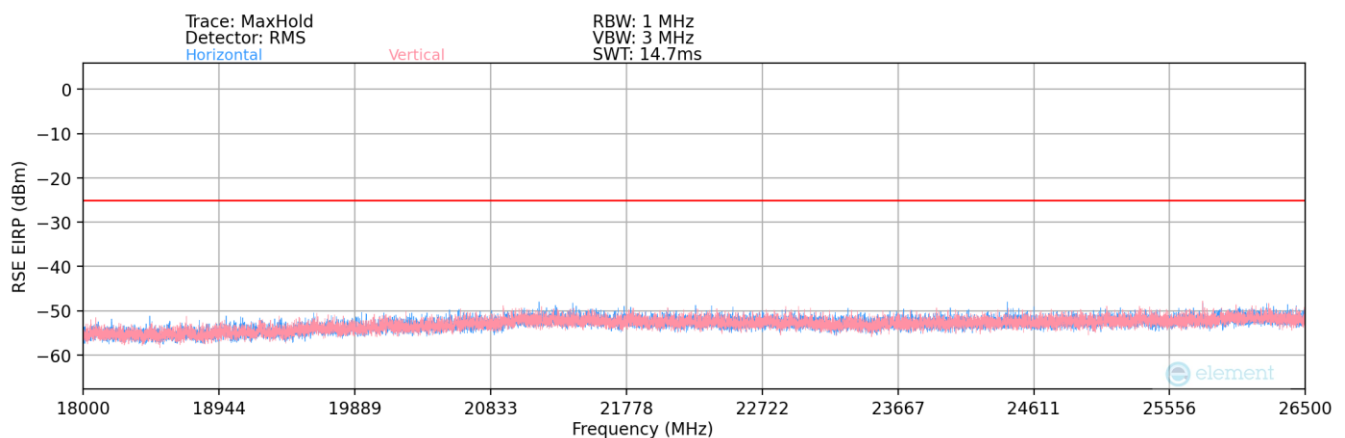

Plot 7-151. Radiated Spurious Plot NR Band n41(PC2) – Tx Hopping – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 130 of 145

Bandwidth (MHz):	100
Frequency (MHz):	2592.99
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
240.00	H	-	-	-65.36	-12.76	28.88	-68.53	-25.00	-43.53

Table 7-42. Radiated Spurious Data (NR Band n41(PC2) – Tx Hopping – Ant1

Bandwidth (MHz):	100
Frequency (MHz):	2546.01
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5092.02	H	214	210	-70.83	0.22	36.39	-58.87	-25.00	-33.87
7638.03	V	216	23	-66.78	4.52	44.74	-50.51	-25.00	-25.51
10184.04	V	-	-	-75.33	8.47	40.14	-55.12	-25.00	-30.12
12730.05	H	-	-	-75.59	9.26	40.67	-54.58	-25.00	-29.58
15276.06	V	-	-	-75.75	9.99	41.24	-54.01	-25.00	-29.01

Table 7-43. Radiated Spurious Data (NR Band n41(PC2) – Low Channel) – Tx Hopping – Ant1

Bandwidth (MHz):	100
Frequency (MHz):	2592.99
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5185.98	H	185	142	-67.50	0.00	39.50	-55.76	-25.00	-30.76
7778.97	V	159	25	-54.88	4.76	56.88	-38.38	-25.00	-13.38
10371.96	V	-	-	-75.71	8.50	39.79	-55.46	-25.00	-30.46
12964.95	H	233	170	-73.01	9.99	43.98	-51.28	-25.00	-26.28
15557.94	V	-	-	-75.04	9.18	41.14	-54.12	-25.00	-29.12

Table 7-44. Radiated Spurious Data (NR Band n41(PC2) – Mid Channel) – Tx Hopping – Ant1

Bandwidth (MHz):	100
Frequency (MHz):	2640.00
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5280.00	H	207	168	-65.17	0.36	42.19	-53.07	-25.00	-28.07
7920.00	V	178	25	-51.08	4.93	60.85	-34.41	-25.00	-9.41
10560.00	V	-	-	-76.21	8.48	39.27	-55.99	-25.00	-30.99
13200.00	H	184	264	-74.51	10.61	43.10	-52.15	-25.00	-27.15
15840.00	V	-	-	-76.22	8.61	39.39	-55.87	-25.00	-30.87

Table 7-45. Radiated Spurious Data (NR Band n41(PC2) – High Channel) – Tx Hopping – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 131 of 145


Case:	w/ Wireless Charging Pad
Bandwidth (MHz):	100
Frequency (MHz):	2640.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5280.00	H	146	46	-65.60	0.36	41.76	-53.50	-25.00	-28.50
7920.00	V	174	62	-56.48	4.93	55.45	-39.81	-25.00	-14.81
10560.00	V	-	-	-76.13	8.48	39.35	-55.91	-25.00	-30.91
13200.00	H	262	87	-73.44	10.61	44.17	-51.08	-25.00	-26.08
15840.00	V	-	-	-76.18	8.61	39.43	-55.83	-25.00	-30.83


Table 7-46. Radiated Spurious Data (NR Band n41(PC2) – Tx Hopping – Ant1 with WCP

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 132 of 145


ULCA LTE Band 41(PC3) – Ant2

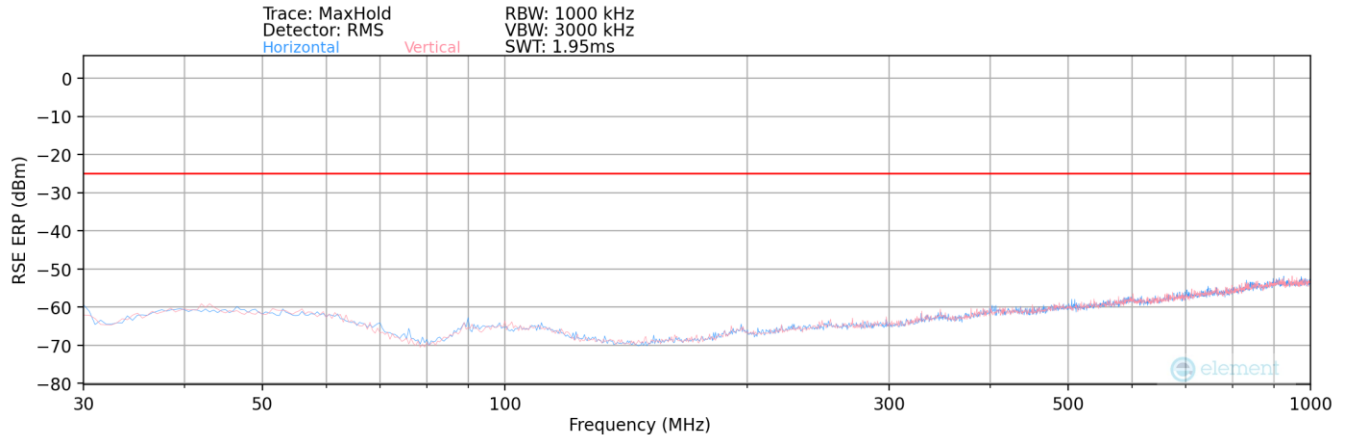

Plot 7-152. Radiated Spurious Plot (ULCA LTE Band 41(PC3) – Ant2)

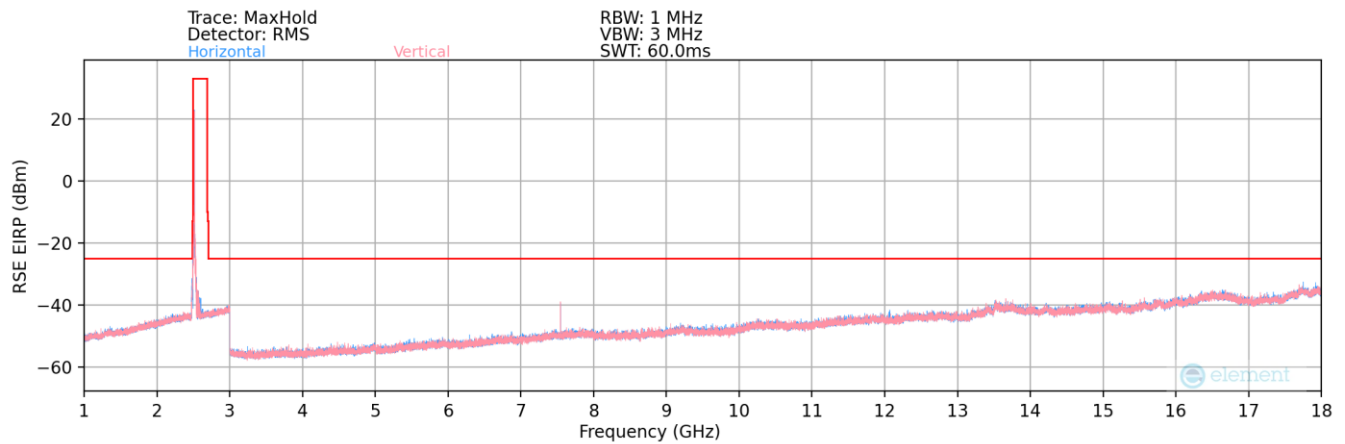


Plot 7-153. Radiated Spurious Plot (ULCA LTE Band 41(PC3)– Low Channel – Ant2)

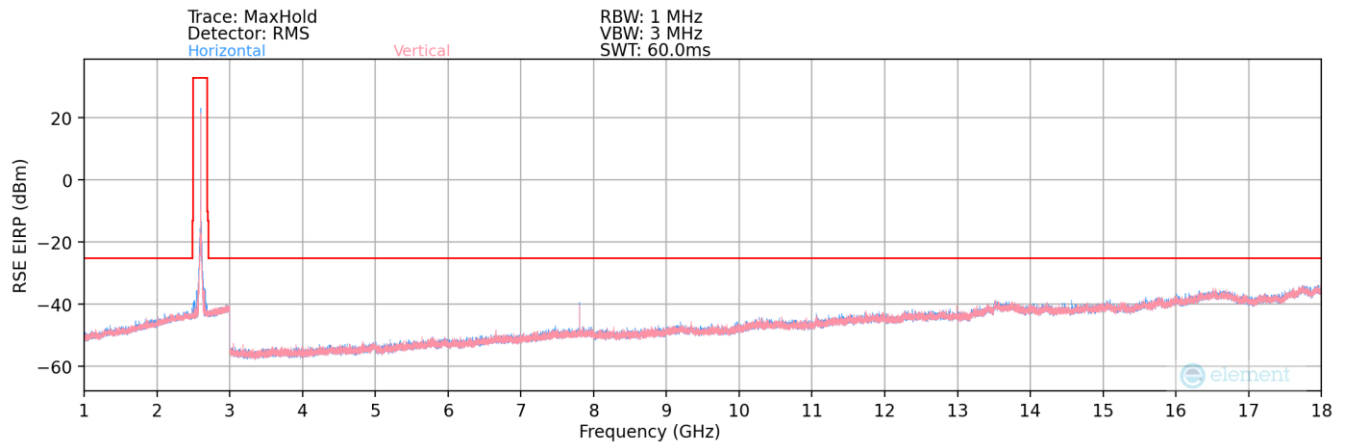

Plot 7-154. Radiated Spurious Plot (ULCA LTE Band 41(PC3)– Mid Channel – Ant2)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 133 of 145

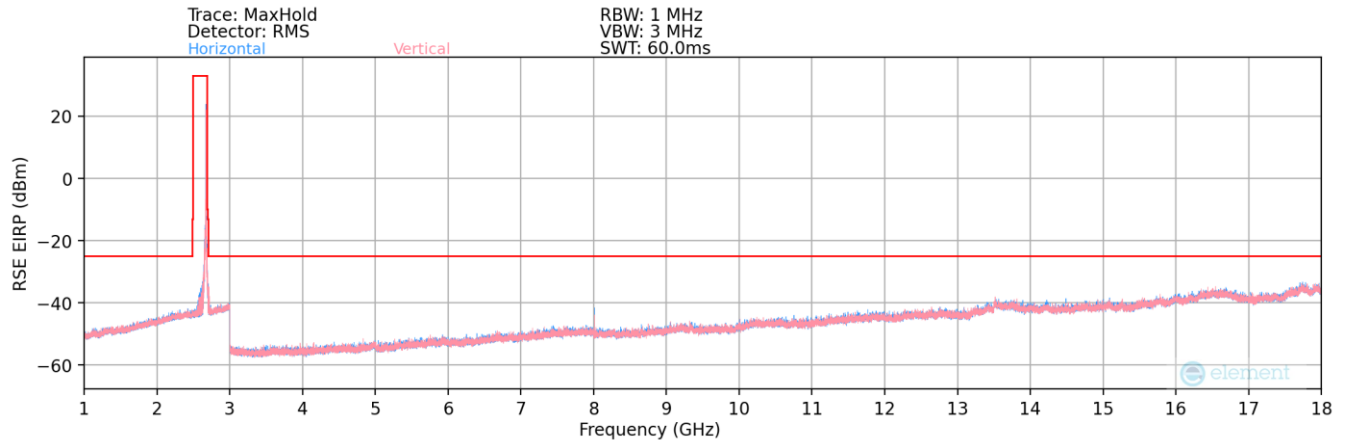

Plot 7-155. Radiated Spurious Plot (ULCA LTE Band 41(PC3)– High Channel – Ant2)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2506.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2525.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5031.80	H	115	188	-64.63	7.65	50.02	-45.24	-25.00	-20.24
7547.70	H	109	195	-64.23	13.47	56.24	-39.02	-25.00	-14.02
10063.60	H	-	-	-72.57	15.96	50.39	-44.87	-25.00	-19.87
12530.00	H	-	-	-72.76	20.08	54.32	-40.94	-25.00	-15.94
15036.00	H	-	-	-72.52	23.04	57.52	-37.73	-25.00	-12.73

Table 7-47. Radiated Spurious Data (ULCA LTE Band 41(PC3)– Low Channel – Ant2)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5205.80	H	127	193	-64.30	7.41	50.11	-45.15	-25.00	-20.15
7808.70	H	124	197	-66.62	13.48	53.86	-41.40	-25.00	-16.40
10411.60	H	-	-	-72.47	16.83	51.36	-43.89	-25.00	-18.89
12965.00	H	-	-	-72.78	20.20	54.42	-40.83	-25.00	-15.83
15558.00	H	-	-	-73.28	23.62	57.34	-37.92	-25.00	-12.92

Table 7-48. Radiated Spurious Data (ULCA LTE Band 41(PC3)– Mid Channel – Ant2)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 134 of 145

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2680.0
PCC RB / Offset:	1 / 0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2660.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5340.20	H	112	57	-67.90	8.01	47.11	-48.14	-25.00	-23.14
8010.30	H	109	58	-66.52	13.56	54.04	-41.22	-25.00	-16.22
10680.40	H	-	-	-71.88	17.16	52.28	-42.97	-25.00	-17.97
13400.00	H	-	-	-72.85	21.06	55.21	-40.05	-25.00	-15.05
16080.00	H	-	-	-73.97	24.71	57.74	-37.52	-25.00	-12.52

Table 7-49. Radiated Spurious Data (ULCA LTE Band 41(PC3)– High Channel – Ant2)


PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
90.00	H	-	-	-57.13	-16.23	33.64	-63.77	-25.00	-38.77
506.00	H	-	-	-66.57	-7.22	33.21	-64.19	-25.00	-39.19
755.00	H	-	-	-68.23	-2.92	35.85	-61.55	-25.00	-36.55


Table 7-50. Radiated Spurious Data (ULCA LTE Band 41(PC3)– Mid Channel – Ant2)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 135 of 145


LTE Band 41(PC3) – Ant2

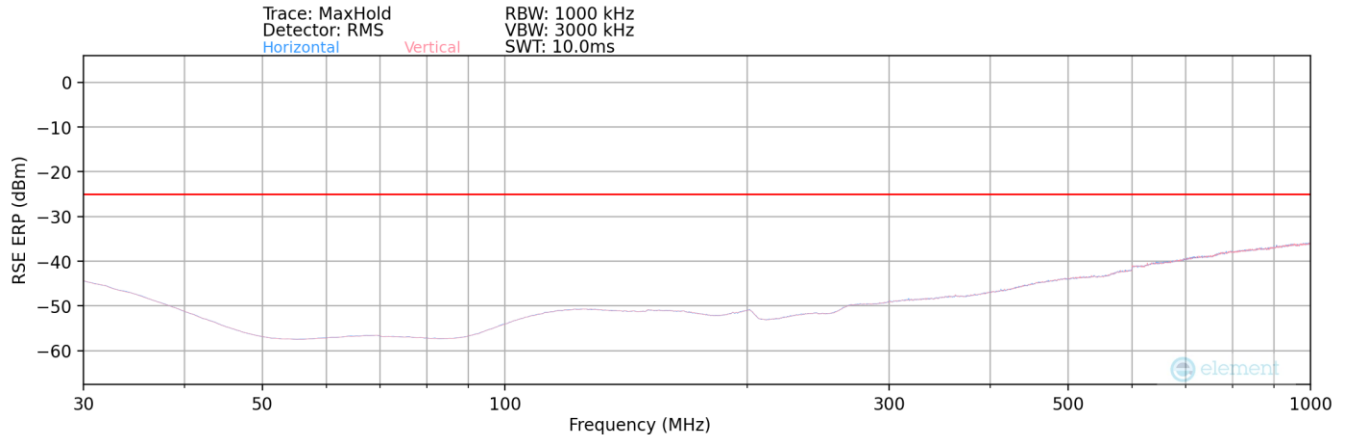

Plot 7-156. Radiated Spurious Plot (LTE Band 41(PC3)) – Ant2

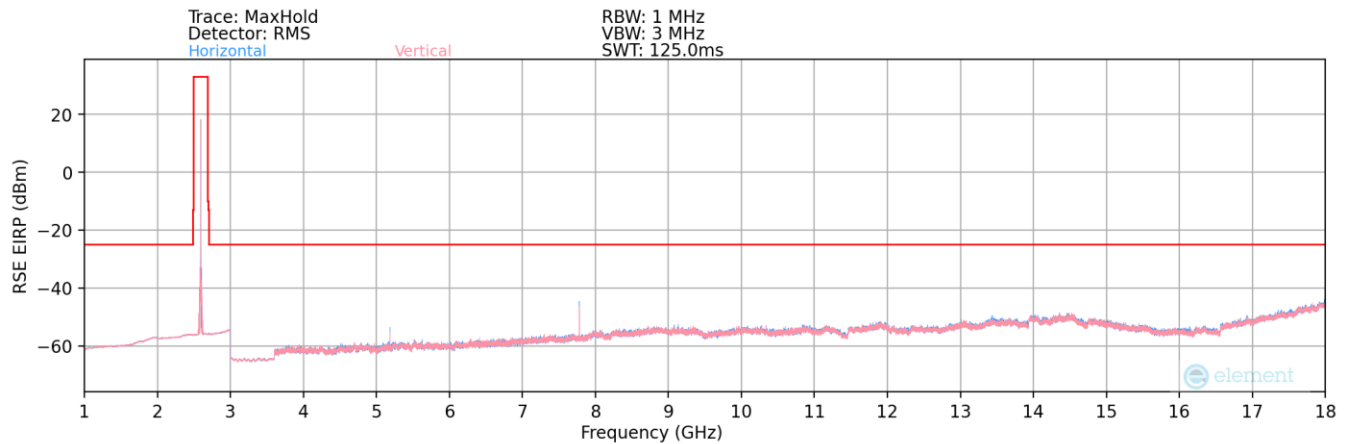

Plot 7-157. Radiated Spurious Plot (LTE Band 41(PC3)) – Ant2

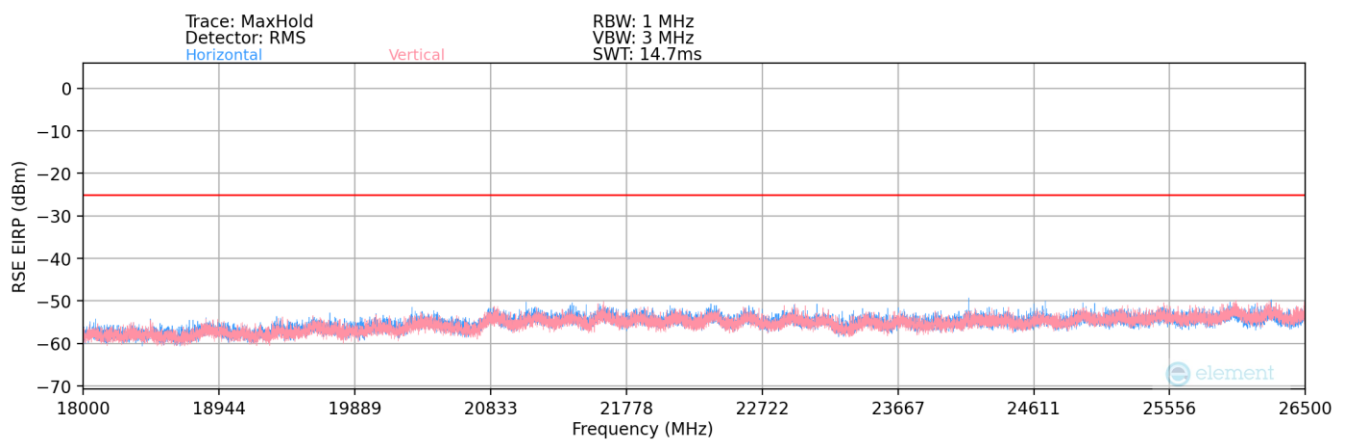

Plot 7-158. Radiated Spurious Plot (LTE Band 41(PC3)) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 136 of 145

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
425.00	H	-	-	-80.54	24.02	50.48	-46.93	-25.00	-21.93

Table 7-51. Radiated Spurious Data (LTE Band 41(PC3)) – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.00	H	209	188	-70.74	-0.33	35.93	-59.33	-25.00	-34.33
7518.00	H	152	13	-69.58	4.20	41.62	-53.63	-25.00	-28.63
10024.00	H	-	-	-74.86	8.50	40.64	-54.61	-25.00	-29.61
12530.00	H	-	-	-75.79	9.13	40.34	-54.92	-25.00	-29.92
15036.00	H	-	-	-75.28	10.72	42.44	-52.82	-25.00	-27.82
20048.00	H	-	-	-63.24	2.47	46.23	-58.57	-25.00	-33.57
22554.00	H	-	-	-62.26	3.48	48.21	-56.59	-25.00	-31.59

Table 7-52. Radiated Spurious Data (LTE Band 41(PC3) – Low Channel) – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.00	H	123	4	-63.15	0.00	43.85	-51.41	-25.00	-26.41
7779.00	H	131	9	-57.29	4.76	54.47	-40.79	-25.00	-15.79
10372.00	H	-	-	-75.44	8.50	40.06	-55.19	-25.00	-30.19
12965.00	H	135	3	-74.63	9.99	42.36	-52.90	-25.00	-27.90
15558.00	H	-	-	-75.32	9.18	40.86	-54.40	-25.00	-29.40
18151.00	H	-	-	-63.98	1.18	44.20	-60.60	-25.00	-35.60
20744.00	H	-	-	-62.21	3.15	47.94	-56.86	-25.00	-31.86
23337.00	H	-	-	-62.74	3.49	47.75	-57.05	-25.00	-32.05

Table 7-53. Radiated Spurious Data (LTE Band 41(PC3) – Mid Channel) – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.00	H	131	6	-71.60	0.82	36.22	-59.04	-25.00	-34.04
8040.00	H	170	93	-66.40	5.51	46.11	-49.15	-25.00	-24.15
10720.00	H	-	-	-75.73	8.49	39.76	-55.50	-25.00	-30.50
13400.00	H	-	-	-75.53	11.06	42.53	-52.72	-25.00	-27.72
16080.00	H	-	-	-74.97	7.65	39.68	-55.58	-25.00	-30.58
18760.00	H	-	-	-63.53	1.38	44.85	-59.95	-25.00	-34.95
21440.00	H	-	-	-62.13	3.79	48.66	-56.14	-25.00	-31.14
24120.00	H	-	-	-62.27	3.71	48.43	-56.37	-25.00	-31.37

Table 7-54. Radiated Spurious Data (LTE Band 41(PC3) – High Channel) – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 137 of 145

Case:	w/ Wireless Charging Pad
Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.00	H	178	242	-69.76	0.00	37.24	-58.02	-25.00	-33.02
7779.00	H	233	70	-67.94	4.76	43.82	-51.44	-25.00	-26.44
10372.00	H	-	-	-75.60	8.50	39.90	-55.35	-25.00	-30.35
12965.00	H	252	87	-74.80	9.99	42.19	-53.07	-25.00	-28.07
15558.00	H	-	-	-74.94	9.18	41.24	-54.02	-25.00	-29.02
18151.00	H	-	-	-63.66	1.18	44.52	-50.74	-25.00	-25.74
20744.00	H	-	-	-62.45	3.15	47.70	-47.56	-25.00	-22.56
23337.00	H	-	-	-62.41	3.49	48.08	-47.17	-25.00	-22.17

Table 7-55. Radiated Spurious Data (LTE Band 41(PC3)) – Ant2 with WCP

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 138 of 145

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26:2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26:2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


Test Notes

None

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 139 of 145

LTE Band 41					
		Operating Frequency (Hz):		2,593,000,000	
		Ref. Voltage (VDC):		4.521	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	2,593,157,211	-3,373	-0.0001301
		- 20	2,593,164,284	3,700	0.0001427
		- 10	2,593,157,199	-3,385	-0.0001305
		0	2,593,156,452	-4,132	-0.0001593
		+ 10	2,593,162,656	2,072	0.0000799
		+ 20 (Ref)	2,593,160,584	0	0.0000000
		+ 30	2,593,154,383	-6,201	-0.0002391
		+ 40	2,593,156,710	-3,874	-0.0001494
		+ 50	2,593,166,235	5,651	0.0002179
Battery Endpoint	3.398	+ 20	2,593,157,108	-3,476	-0.0001340

Table 7-56. LTE Band 41(PC3) Frequency Stability Data

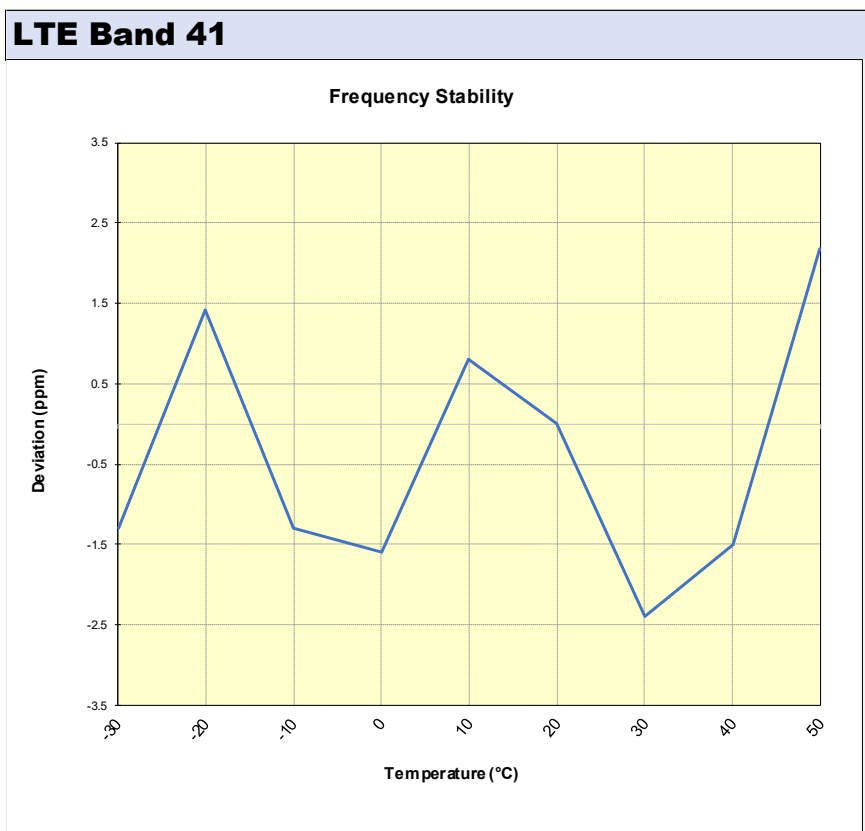

Plot 7-159. LTE Band 41(PC3) Frequency Stability Chart


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 140 of 145

NR Band n41

<table><tr><td colspan="2">Operating Frequency (Hz):</td><td colspan="2">2,593,000,000</td></tr><tr><td colspan="2">Ref. Voltage (VDC):</td><td colspan="2">4.521</td></tr></table>						Operating Frequency (Hz):		2,593,000,000		Ref. Voltage (VDC):		4.521	
Operating Frequency (Hz):		2,593,000,000											
Ref. Voltage (VDC):		4.521											
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)								
100 %	4.521	- 30	2,593,156,937	-3,805	-0.0001467								
		- 20	2,593,162,846	2,104	0.0000811								
		- 10	2,593,156,786	-3,956	-0.0001526								
		0	2,593,156,815	-3,927	-0.0001514								
		+ 10	2,593,161,710	968	0.0000373								
		+ 20 (Ref)	2,593,160,742	0	0.0000000								
		+ 30	2,593,155,744	-4,998	-0.0001927								
		+ 40	2,593,156,740	-4,002	-0.0001543								
		+ 50	2,593,165,150	4,408	0.0001700								
Battery Endpoint	3.398	+ 20	2,593,155,899	-4,843	-0.0001868								

Table 7-57. NR Band n41 Frequency Stability Data

NR Band n41

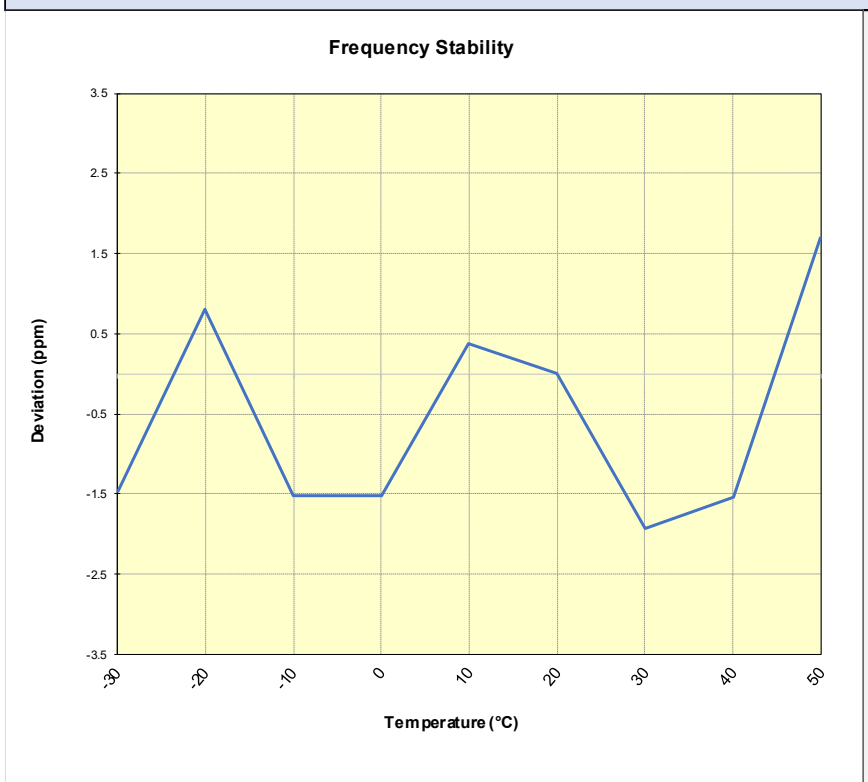

Plot 7-160. NR Band n41 Frequency Stability Chart

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 141 of 145

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF776JPN** complies with all the requirements of Part 27 of the FCC rules. The data referenced from **FCC ID: A3LSMF776U** (Model SM-F776U) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMF776JPN**.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 142 of 145

9.0 APPENDIX A – DATA REFERENCING RESULTS

Overview

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.26-2015.

Notes

- Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – Model: SC-55G


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 99	24.36

Table 9-1. Conducted Output Power Measurements (Spot-check) – LTE Band B41


Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	509202	2546.01	1 / 1	26.28

Table 9-2. Conducted Output Power Measurements (Spot-check) – NR Band n41

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 143 of 145

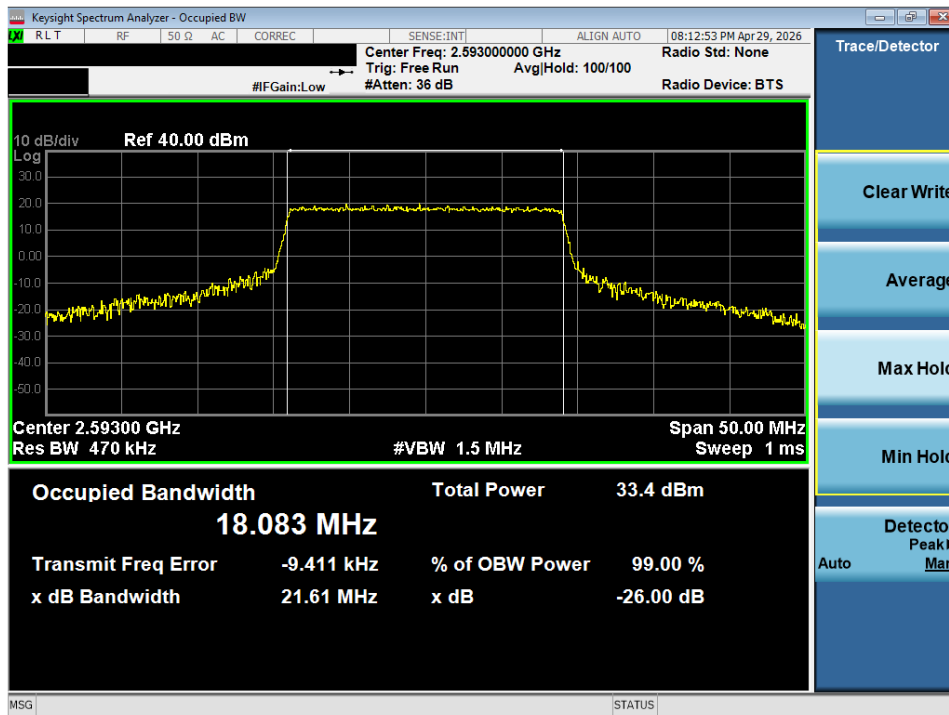

Plot 9-1. Occupied Bandwidth (Spot-check) – LTE Band B41

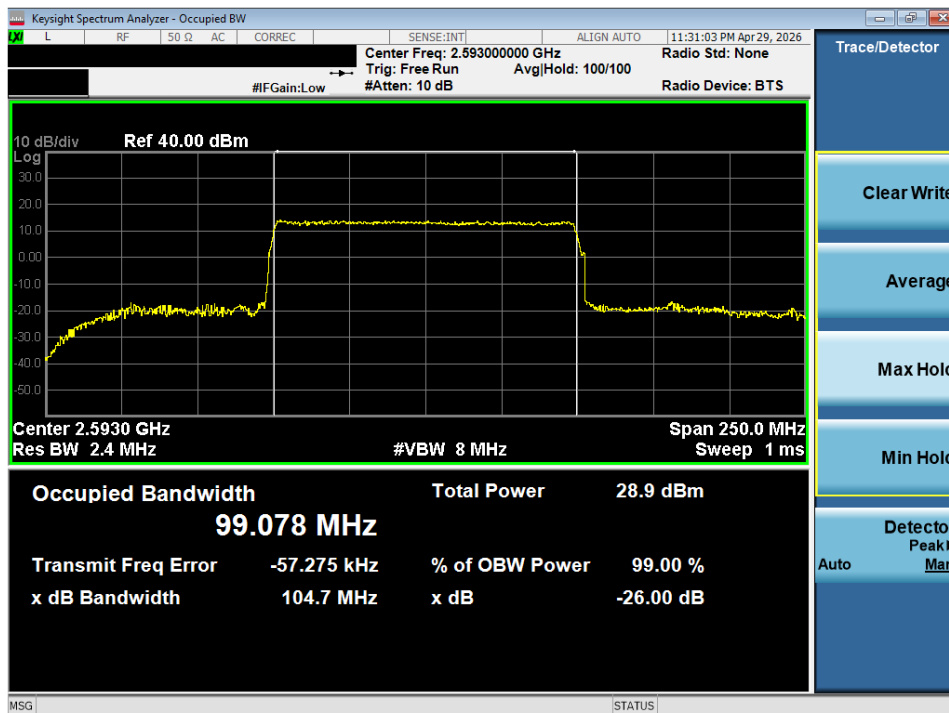

Plot 9-2. Occupied Bandwidth (Spot-check) - NR Band n41

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 144 of 145

Radiated Spot-Checks – Model: SC-55G

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2593.0	H	121	216	4.35	1 / 50	18.61	22.96	0.198	33.01	-10.05

Table 9-3. EIRP Measurements (Spot-check) – LTE Band B41

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
100 MHz	$\pi/2$ BPSK	2592.99	H	125	160	4.35	1 / 1	19.24	23.59	0.229	33.01	-9.42
	QPSK	2592.99	H	125	160	4.35	1 / 1	19.00	23.35	0.216	33.01	-9.66

Table 9-4. EIRP Measurements (Spot-check) – NR Band n41

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7779.00	V	181	80	-63.46	8.22	51.76	-43.50	-25.00	-18.50

Table 9-5. Radiated Spurious Measurements (Spot-check) – LTE Band B41

Bandwidth (MHz):	100
Frequency (MHz):	2546.01
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7638.03	V	182	31	-62.85	15.44	59.59	-35.67	-25.00	-10.67

Table 9-6. Radiated Spurious Measurements (Spot-check) – NR Band n41

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: A3LSMF776U	Variant Model: A3LSMF776JPN	Deviation (dB)	Max Deviation (dB)	Pass/Fail
27	Conducted Output Power	Low Ch. 39750, 20MHz, QPSK, Ant B	dBm	N/A	24.45	24.36	-0.09	1	PASS
	Occupied Bandwidth	Mid Ch. 40620, 20MHz, QPSK, Ant B	MHz	N/A	18.04	18.08	0.04	N/A	PASS
	EIRP	Mid Ch. 40620, 20MHz, QPSK, Ant B	dBm	33.01	23.14	22.96	-0.18	3	PASS
	RSE	Mid Ch. 40620, 20MHz, QPSK, 7779MHz, Ant H	dBm	-25	-40.79	-43.50	-2.71	3	PASS

Table 9-7. Summary of Spot-checks – LTE Band B41

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: A3LSMF776U	Variant Model: A3LSMF776JPN	Deviation (dB)	Max Deviation (dB)	Pass/Fail
27	Conducted Output Power	Low Ch. 509202, 100MHz, BPSK, Ant B	dBm	N/A	26.76	26.28	-0.48	1	PASS
	Occupied Bandwidth	Mid Ch. 518598, 100MHz, QPSK, Ant B	MHz	N/A	97.73	99.08	1.35	N/A	PASS
	EIRP	Mid Ch. 518598, 100MHz, QPSK, Ant B	dBm	33.01	25.19	23.35	-1.84	3	PASS
	RSE	Mid Ch. 518598, 100MHz, QPSK, 7638MHz, Ant H	dBm	-25	-38.38	-35.58	2.80	3	PASS

Table 9-8. Summary of Spot-checks – NR Band n41

- END OF TEST REPORT -

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 145 of 145