
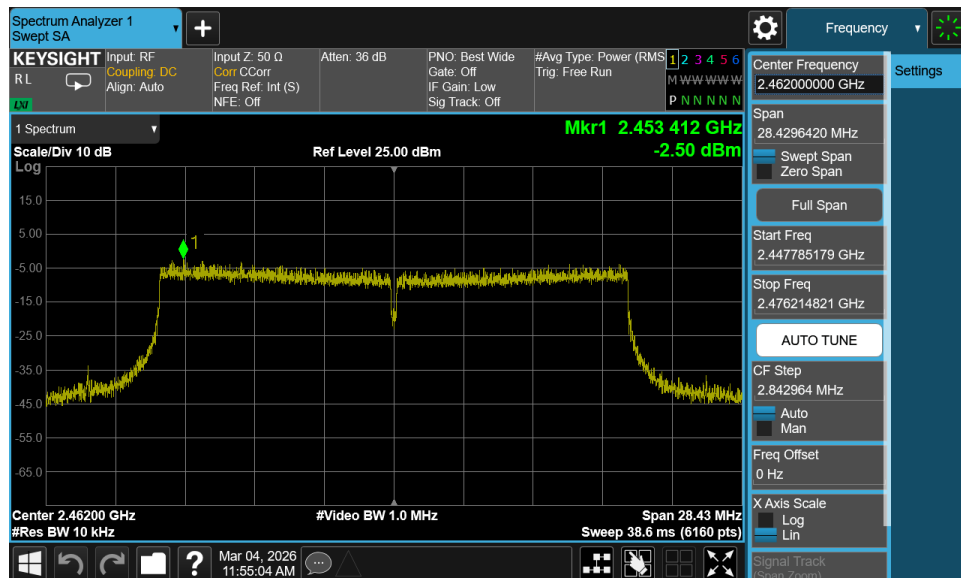


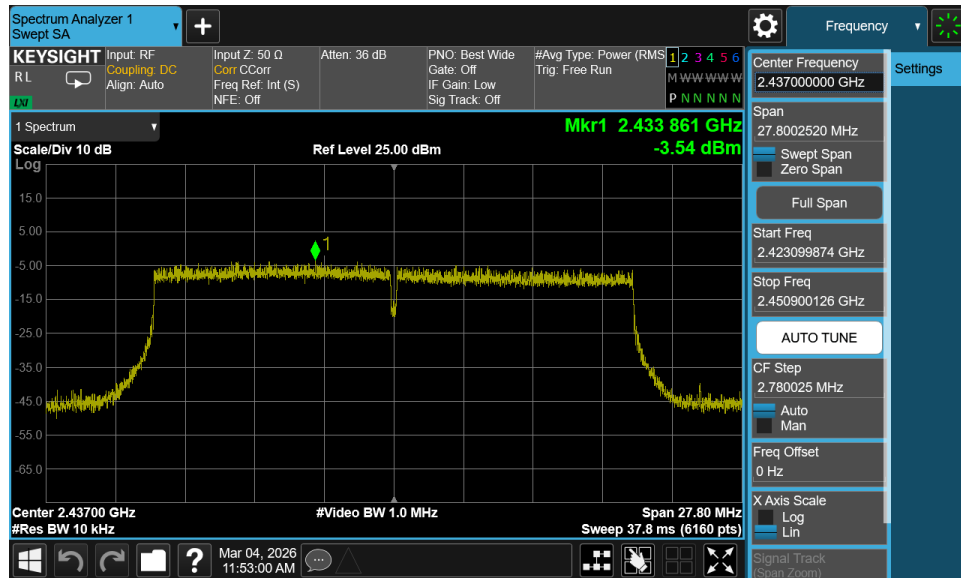

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 62 of 103

Note:

Per ANSI C63.10:2020 Section 14.5.2.3, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be 0.90 dBm for Antenna 1 and -0.42 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(0.90 \text{ dBm} + -0.42 \text{ dBm}) = (1.230 \text{ mW} + 0.908 \text{ mW}) = 2.138 \text{ mW} = 3.30 \text{ dBm}$$

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 63 of 103

7.5 Conducted Band Edge Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode, 8.6Mbps for “ax” mode, and 7.3Mbps (EHT0) for “be” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10:2020 – Section 11.11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 64 of 103		

Conducted Band Edge Emissions

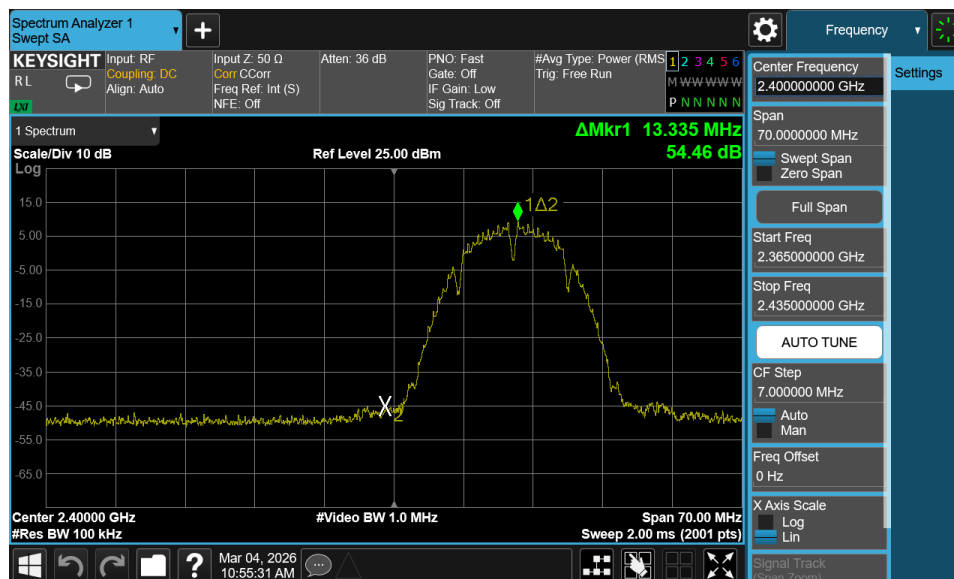


Plot 7-73. Band Edge Plot MIMO ANT1 (802.11b – Ch. 1)

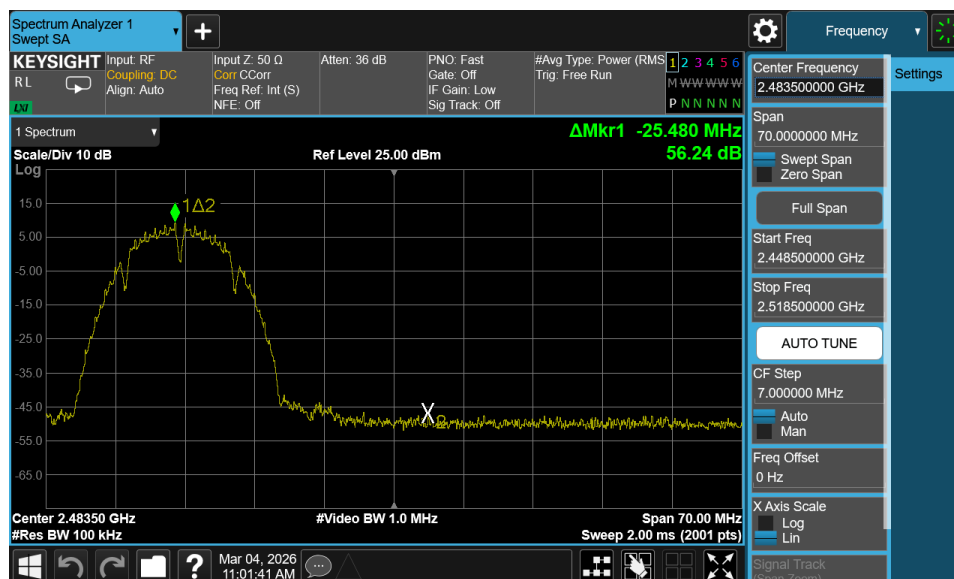


Plot 7-74. Band Edge Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 65 of 103


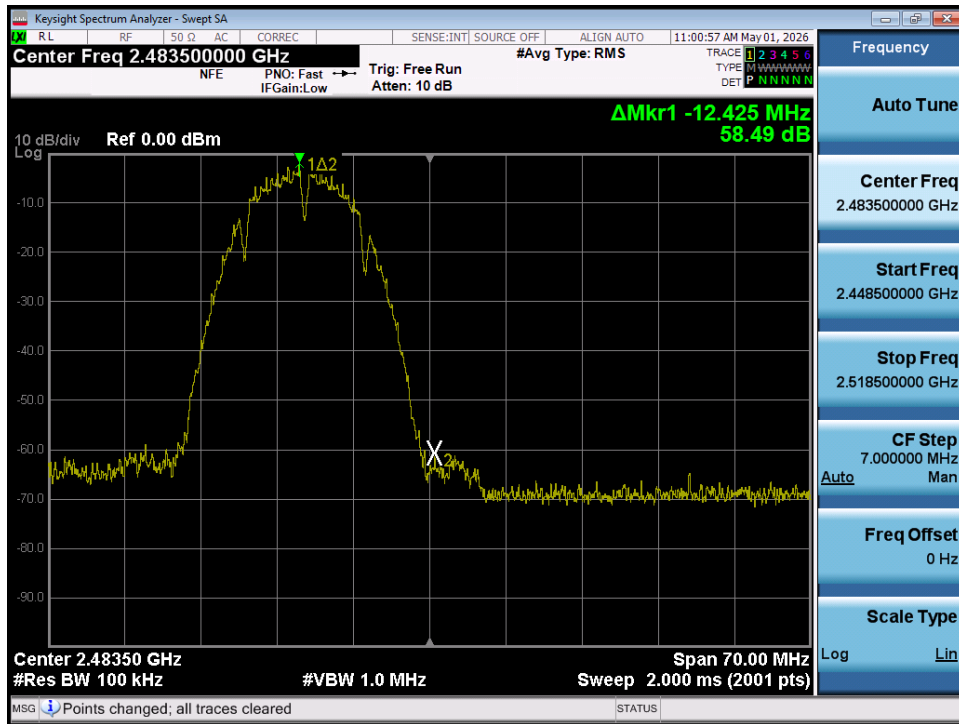


Plot 7-75. Band Edge Plot MIMO ANT1 (802.11b – Ch. 13)

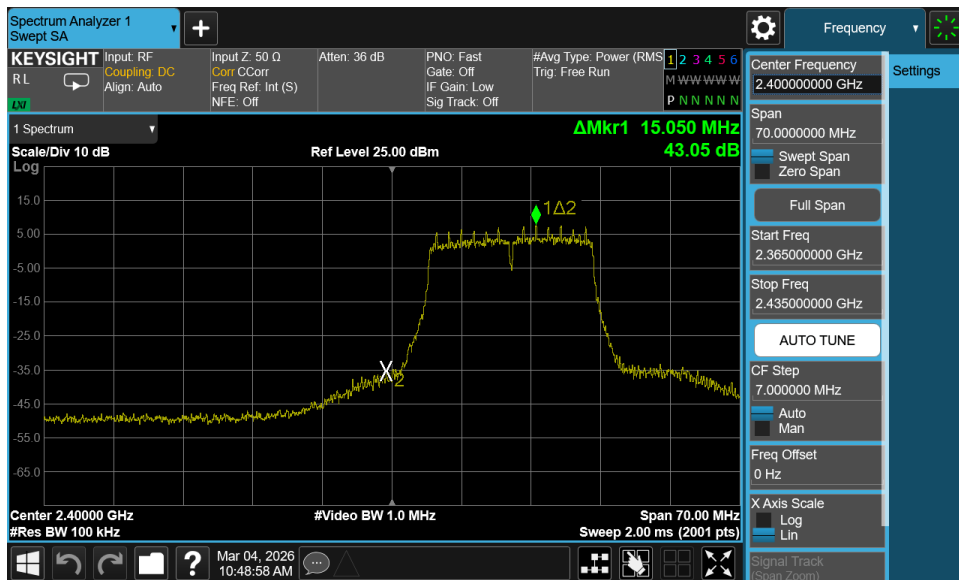


Plot 7-76. Band Edge Plot MIMO ANT1 (802.11g – Ch. 1)


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 66 of 103		

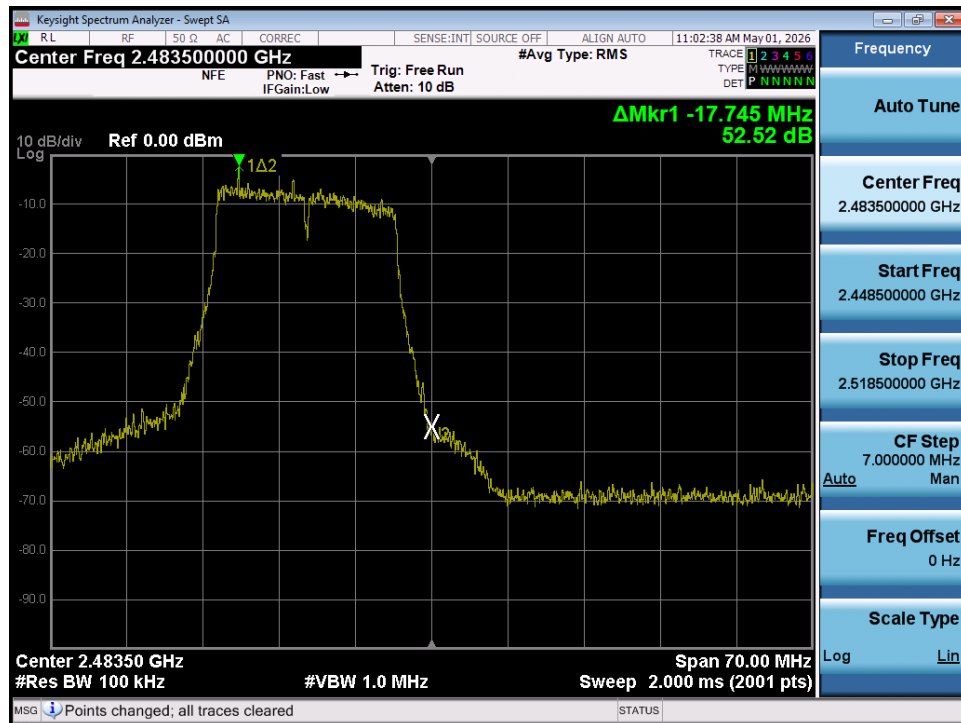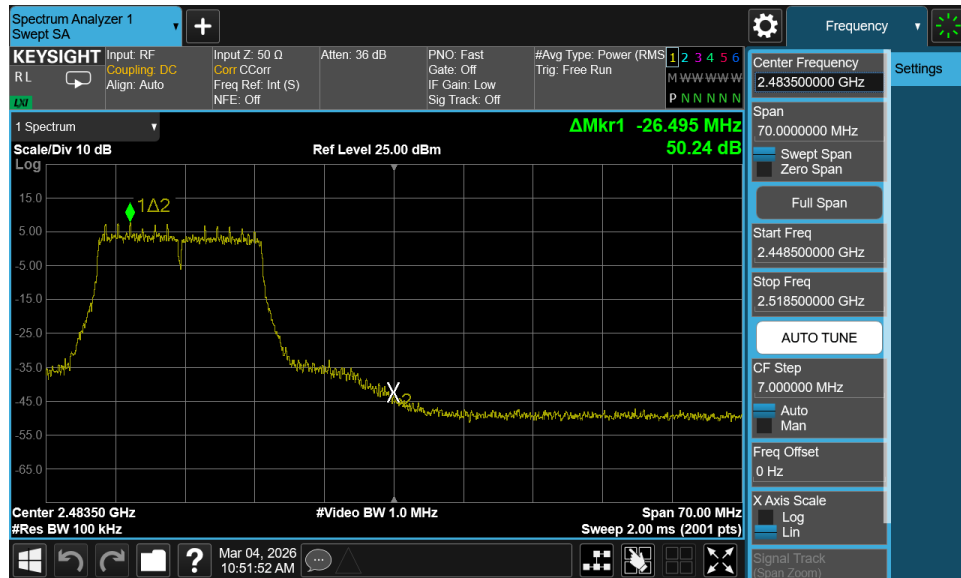

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 67 of 103		

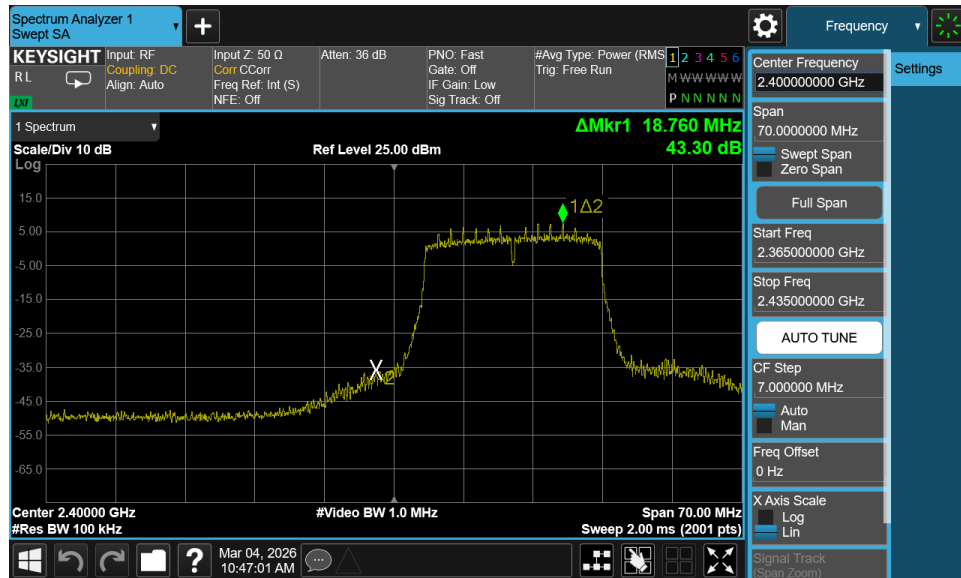


Plot 7-79. Band Edge Plot MIMO ANT1 (802.11n/ac – Ch. 1)

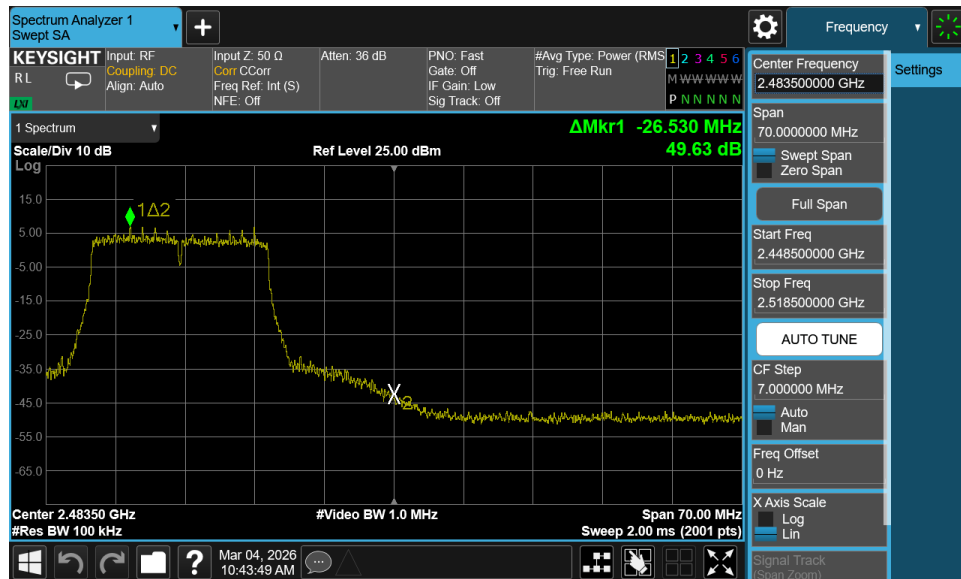


Plot 7-80. Band Edge Plot MIMO ANT1 (802.11n/ac – Ch. 11)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 68 of 103

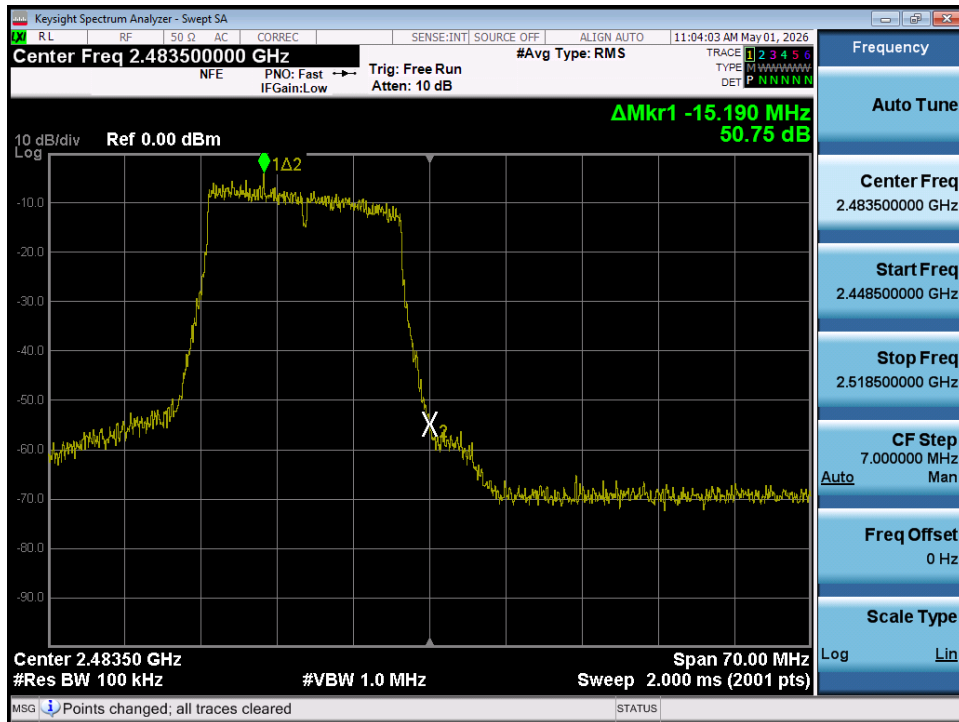


Plot 7-81. Band Edge Plot MIMO ANT1 (802.11n/ac – Ch. 13)

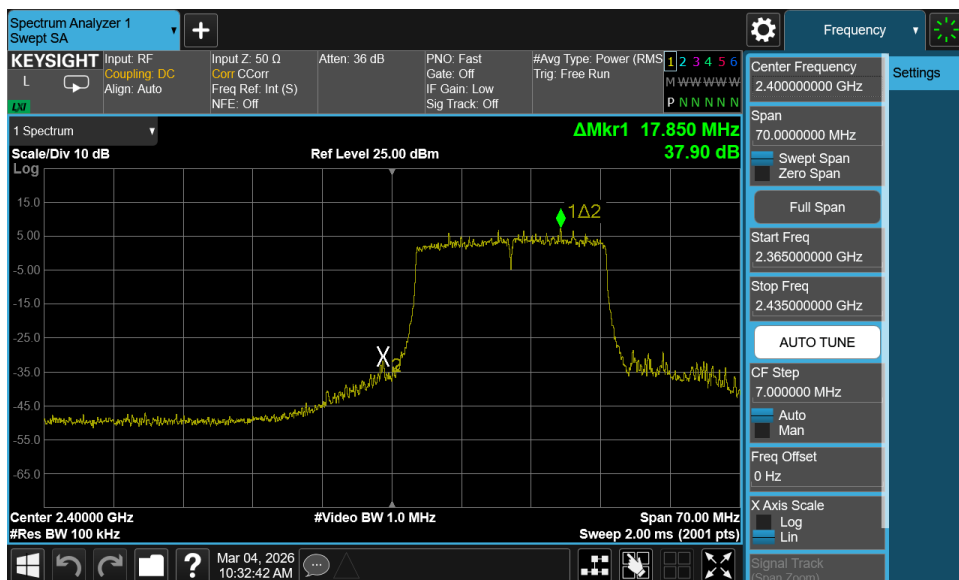


Plot 7-82. Band Edge Plot MIMO ANT1 (802.11ax/be – Ch. 1)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 69 of 103		

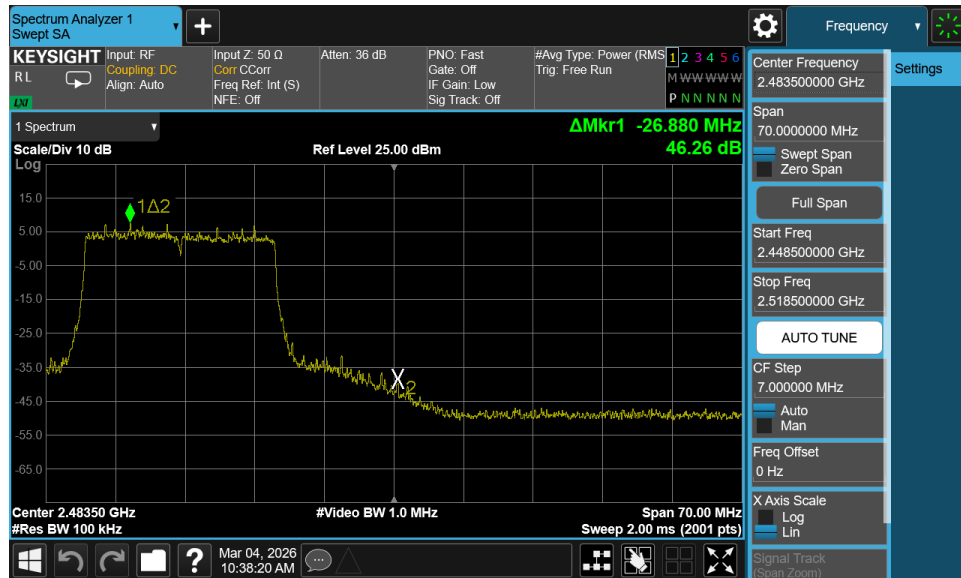


Plot 7-83. Band Edge Plot MIMO ANT1 (802.11ax/be – Ch. 11)

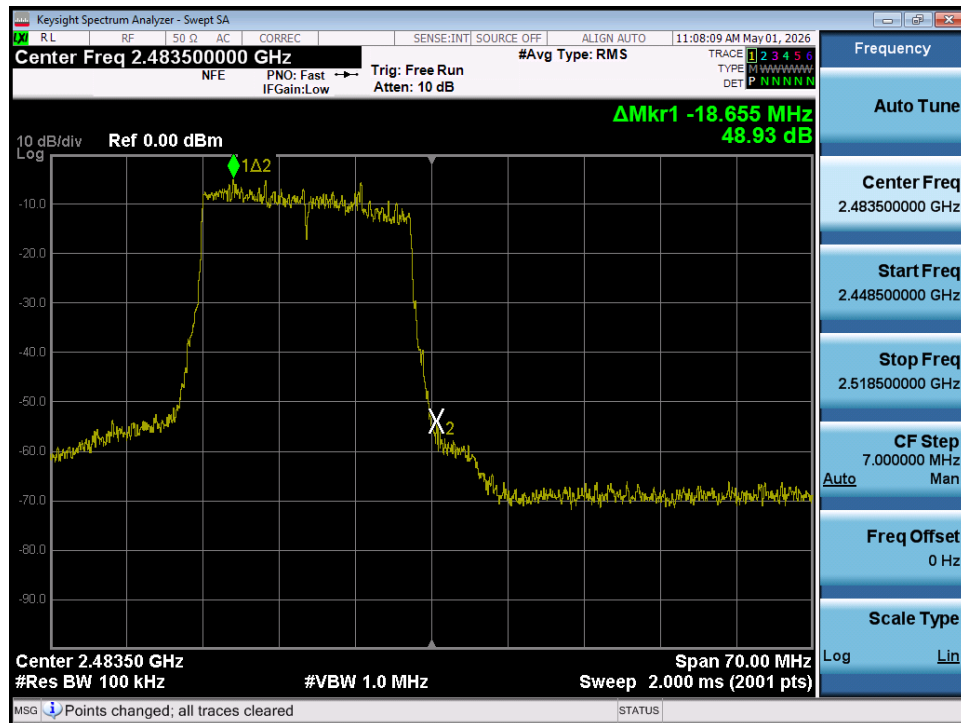


Plot 7-84. Band Edge Plot MIMO ANT1 (802.11ax/be – Ch. 13)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 70 of 103		

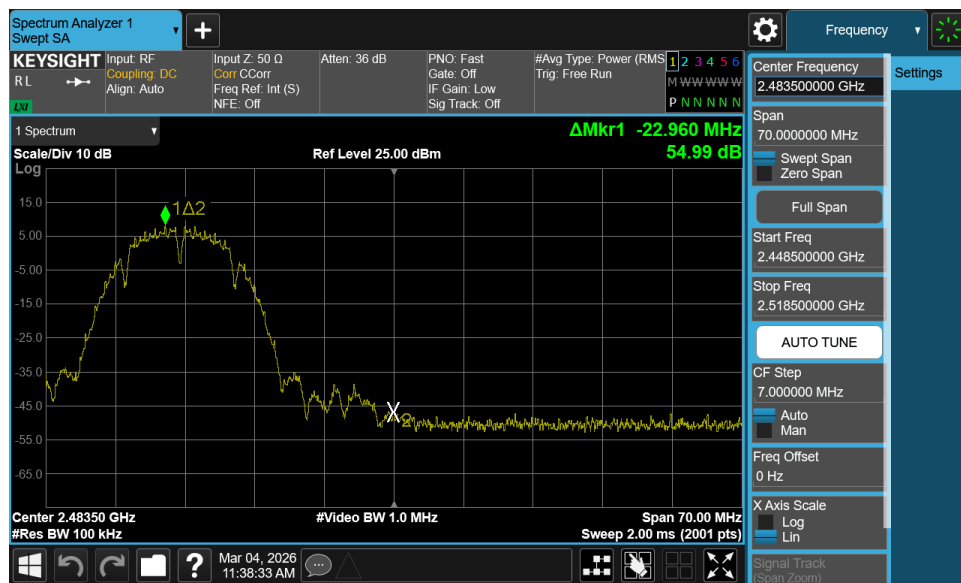

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 71 of 103		


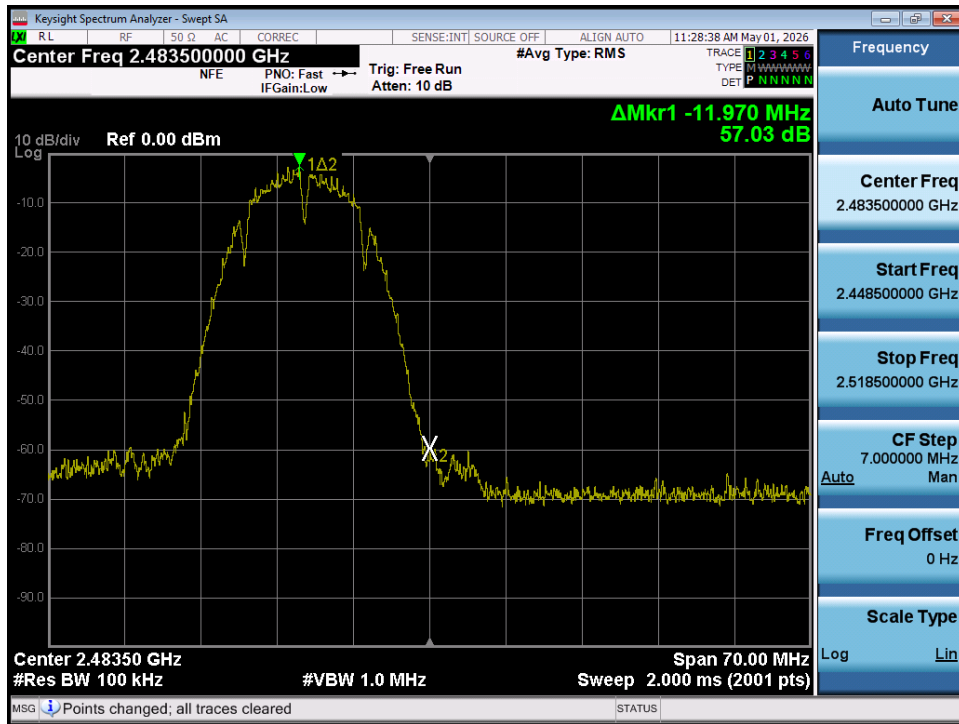


Plot 7-87. Band Edge Plot MIMO ANT2 (802.11b – Ch. 13)





Plot 7-88. Band Edge Plot MIMO ANT2 (802.11g – Ch. 1)


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 72 of 103

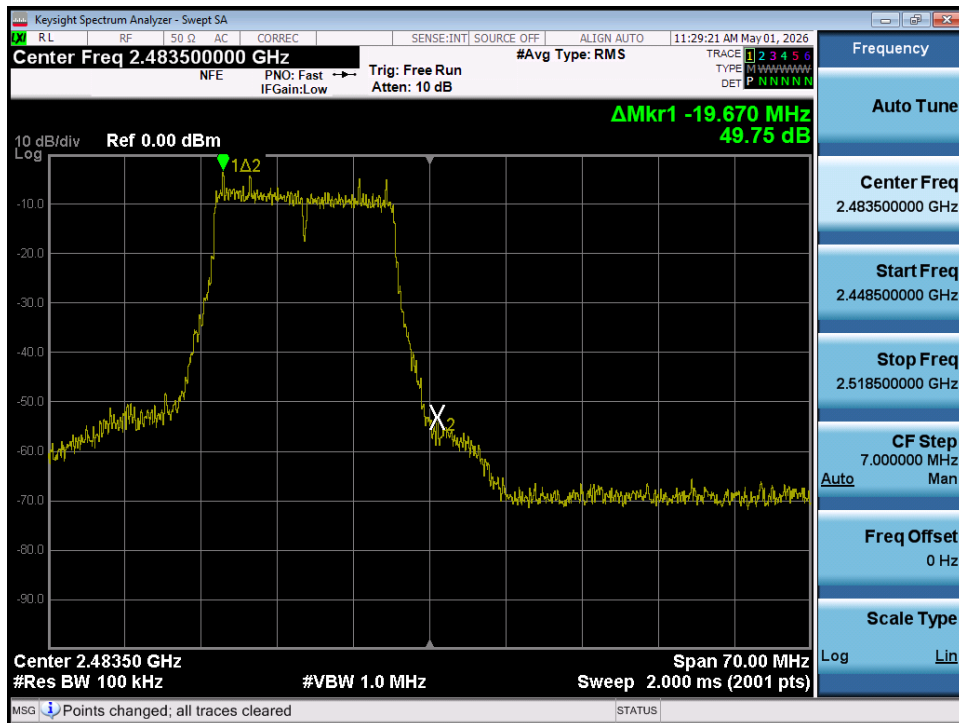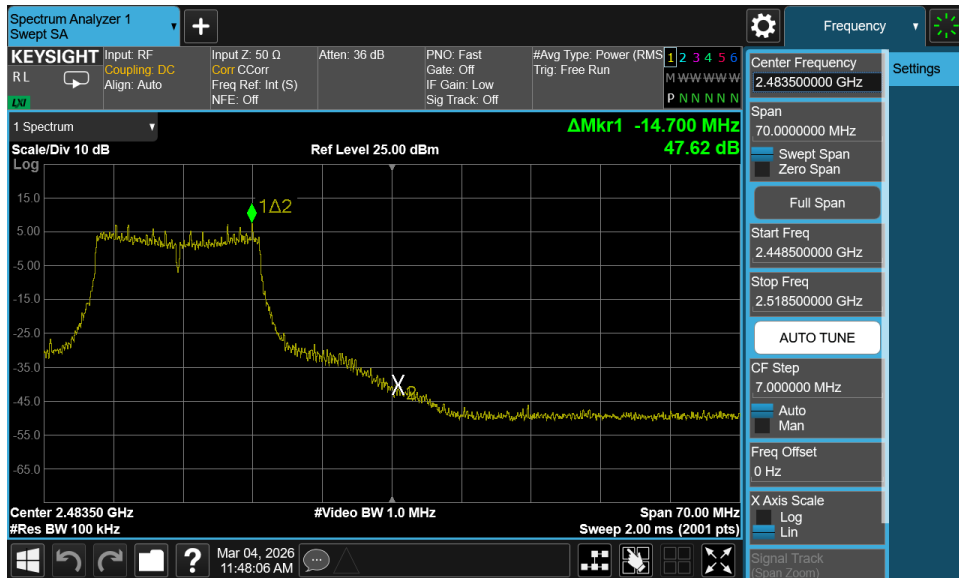


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 73 of 103

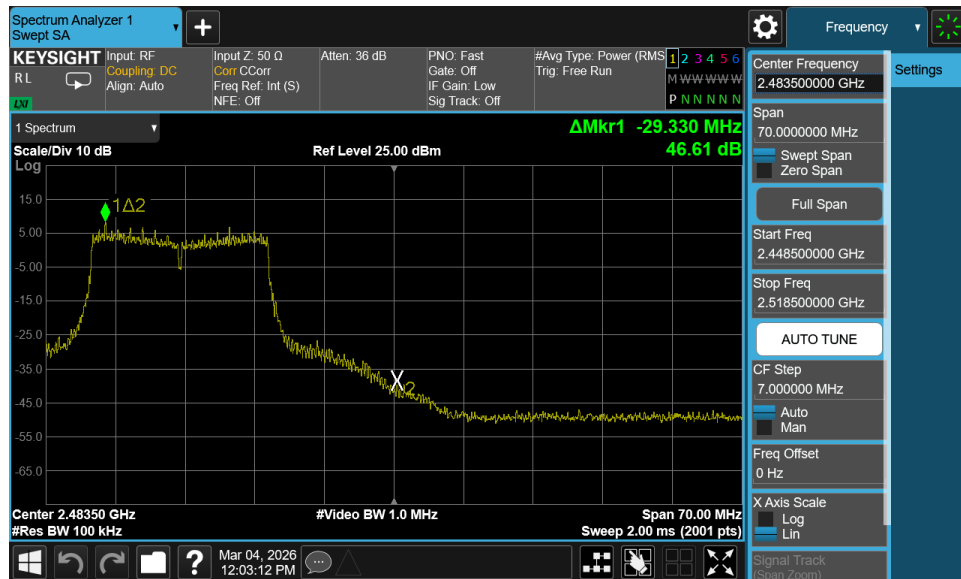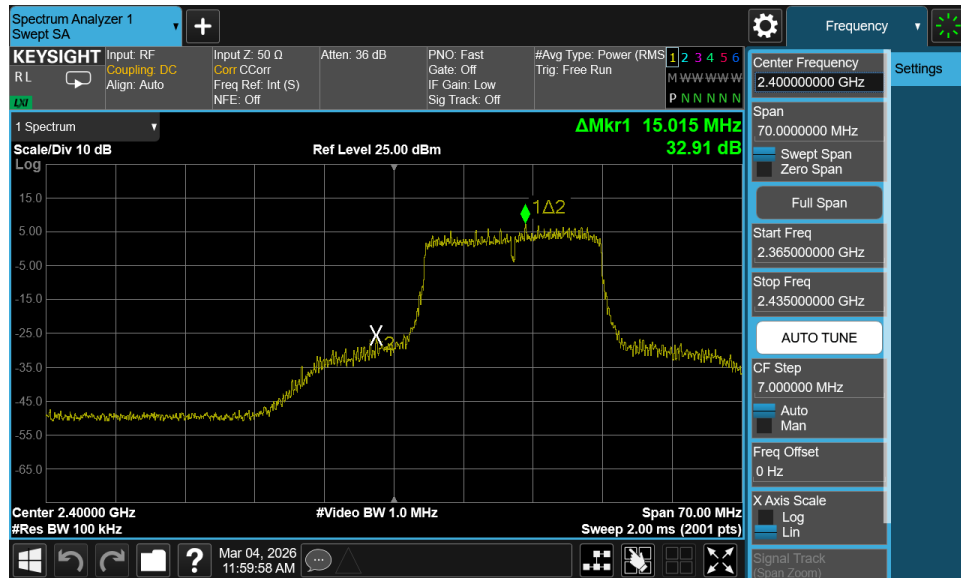

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 74 of 103		

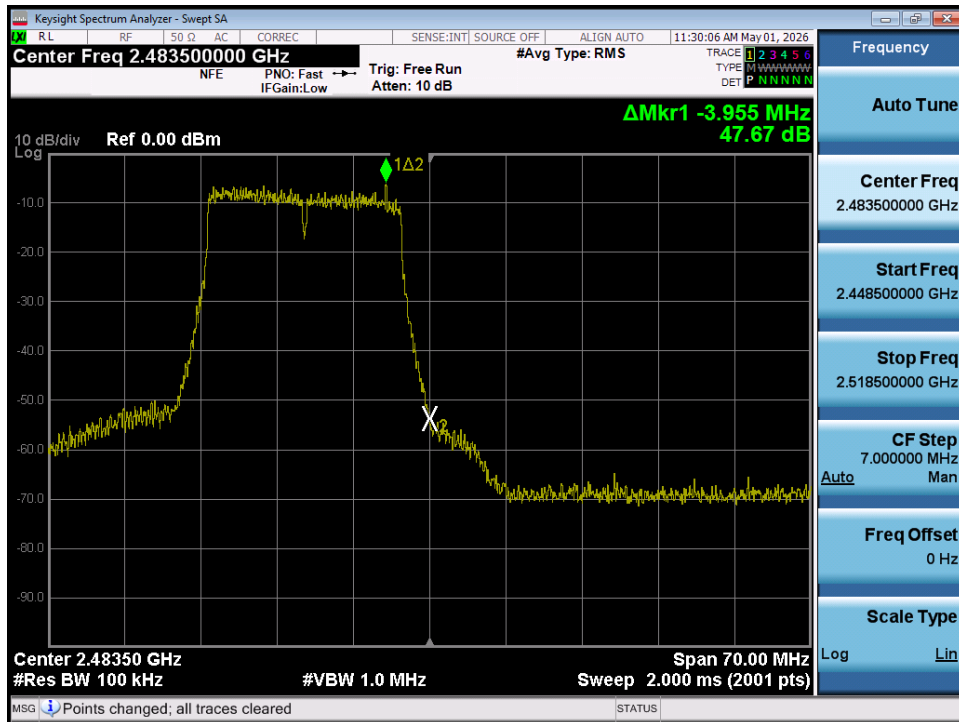


Plot 7-93. Band Edge Plot MIMO ANT2 (802.11n/ac – Ch. 13)

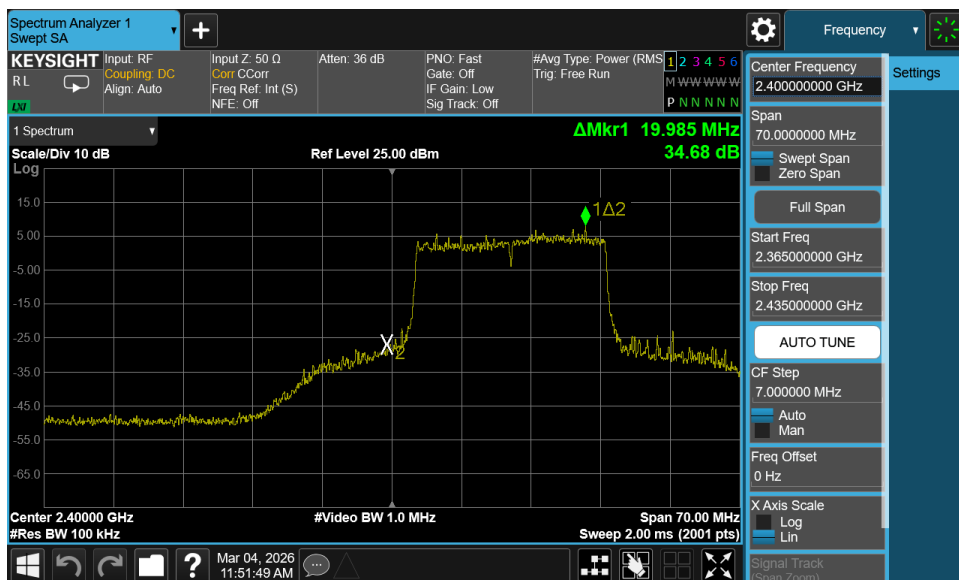


Plot 7-94. Band Edge Plot MIMO ANT2 (802.11ax/be – Ch. 1)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 75 of 103		

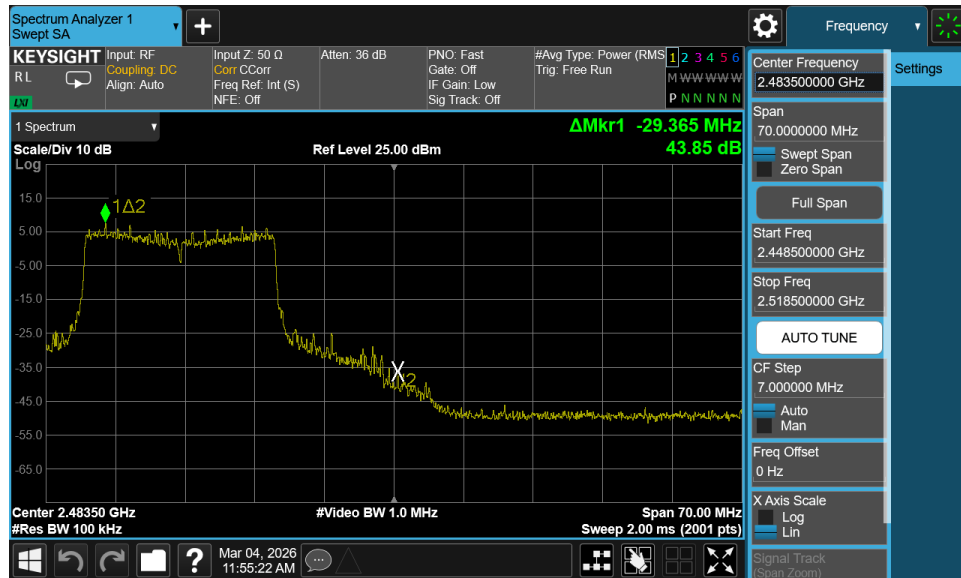

Plot 7-95. Band Edge Plot MIMO ANT2 (802.11ax/be – Ch. 11)

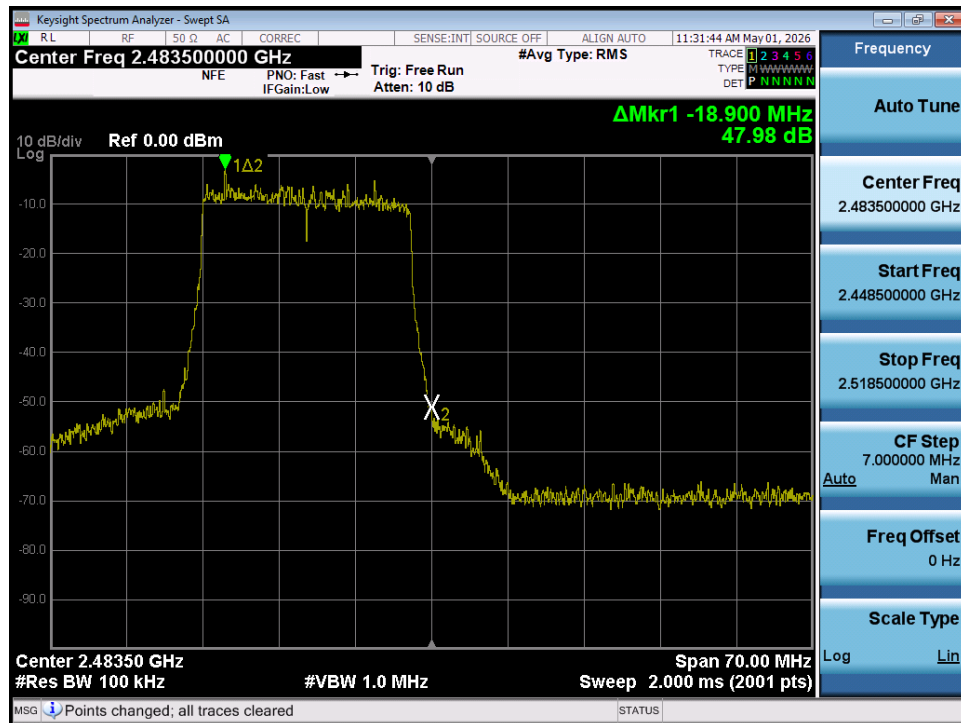

Plot 7-96. Band Edge Plot MIMO ANT2 (802.11ax/be – Ch. 13)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 76 of 103

7.6 Conducted Spurious Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n”, “ax” modes. The worst-case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10:2020.

Test Procedure Used

ANSI C63.10:2020 – Section 11.11.3
ANSI C63.10:2020 – Section 14.5.2.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 77 of 103		

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10:2020 Section 14.5.2.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 78 of 103

MIMO Conducted Spurious Emissions


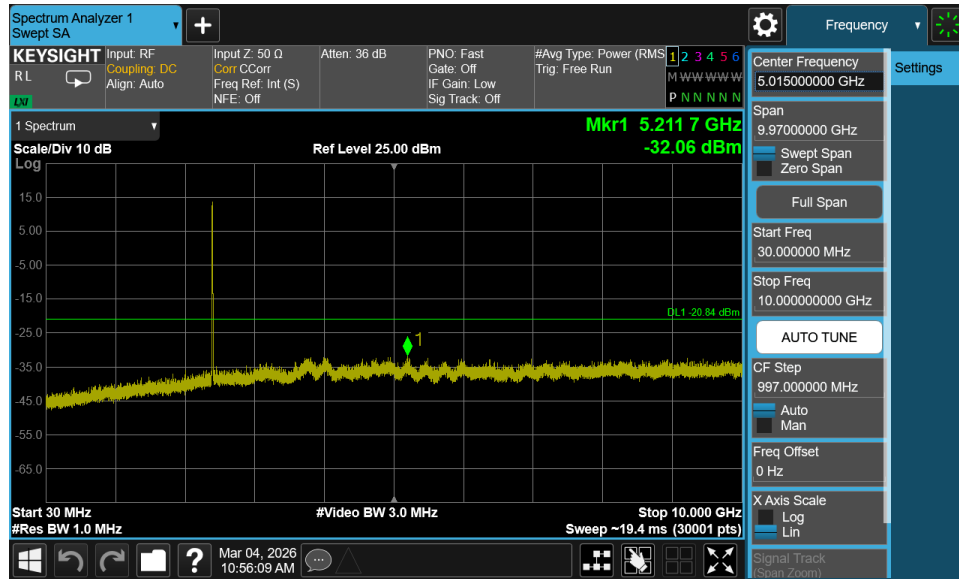


Plot 7-97. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 1)


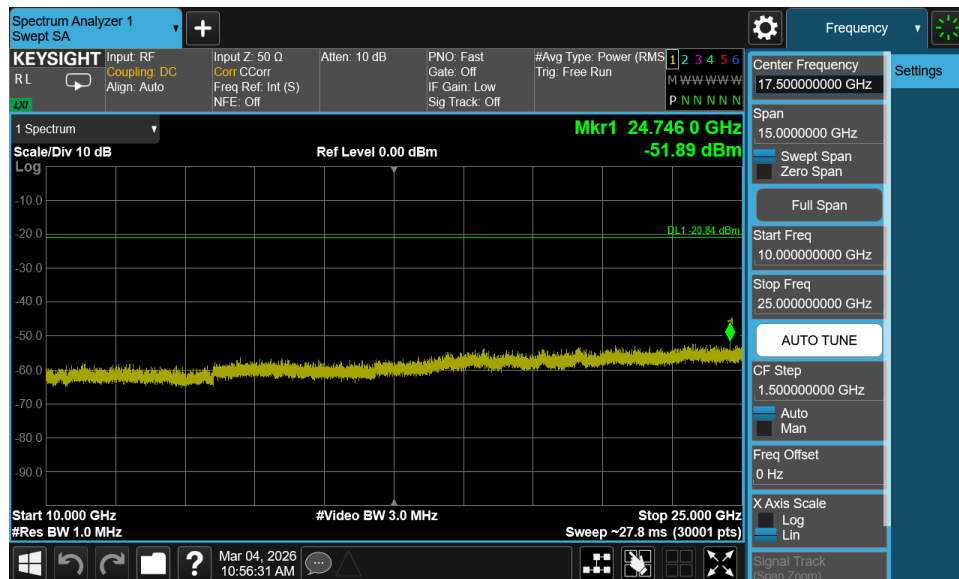


Plot 7-98. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 1)


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 79 of 103

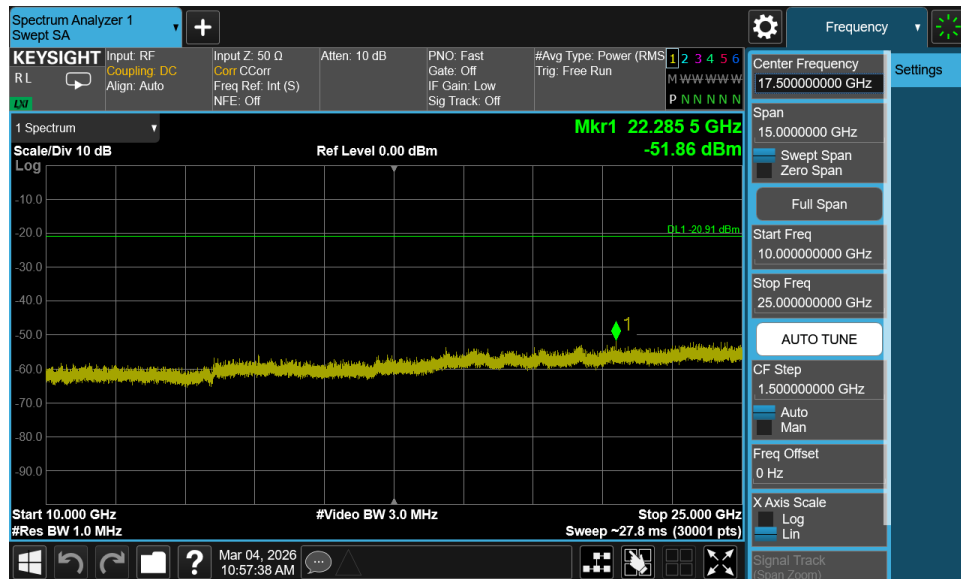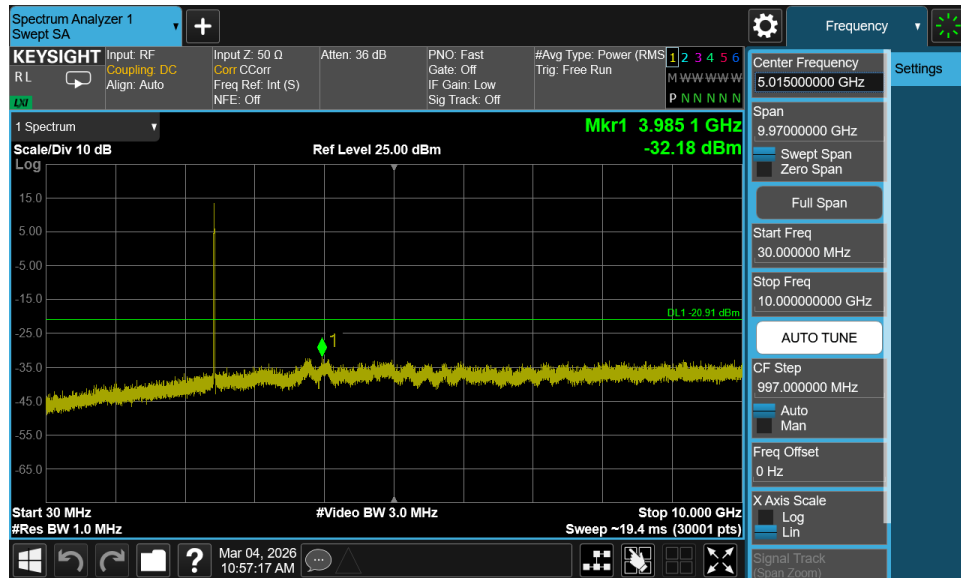


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 80 of 103

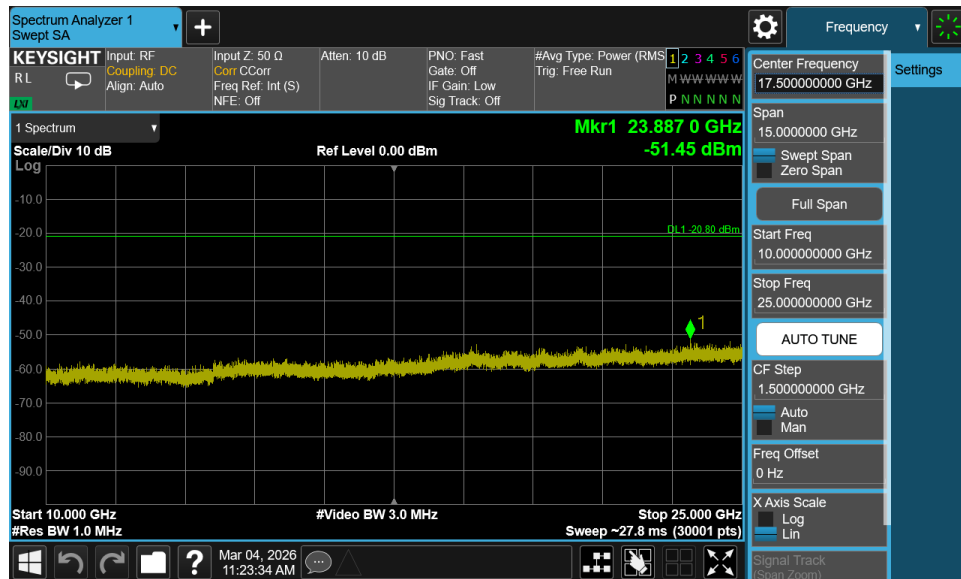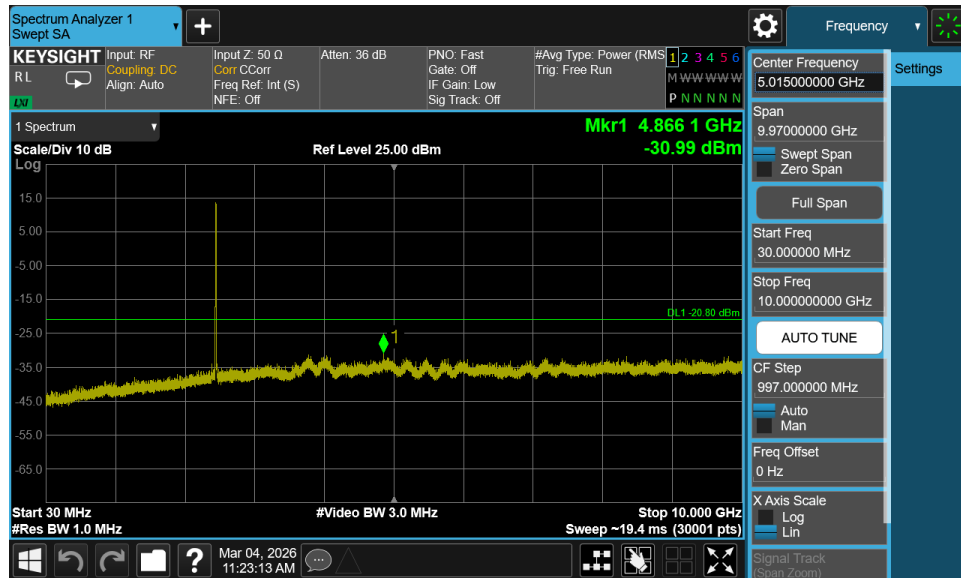

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 81 of 103		


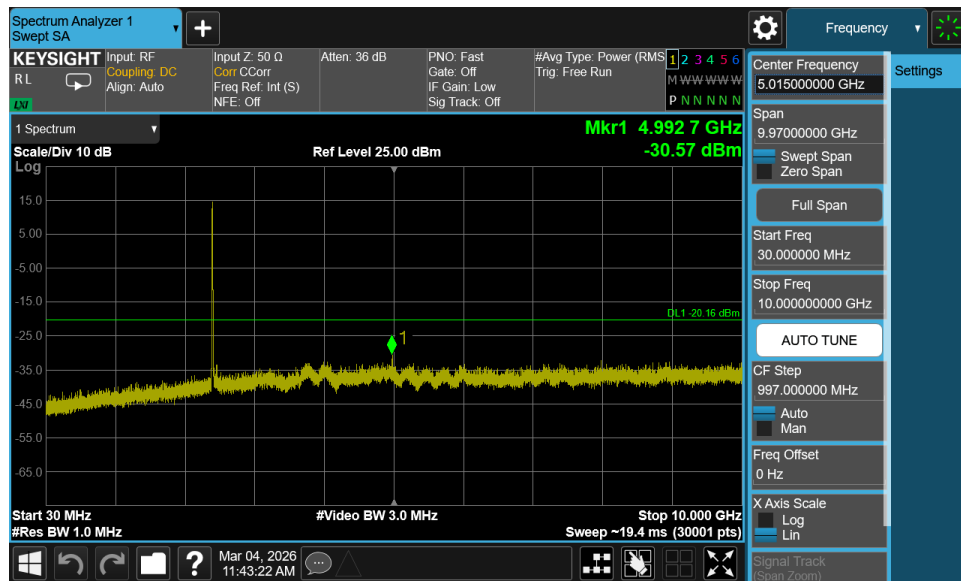


Plot 7-103. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)


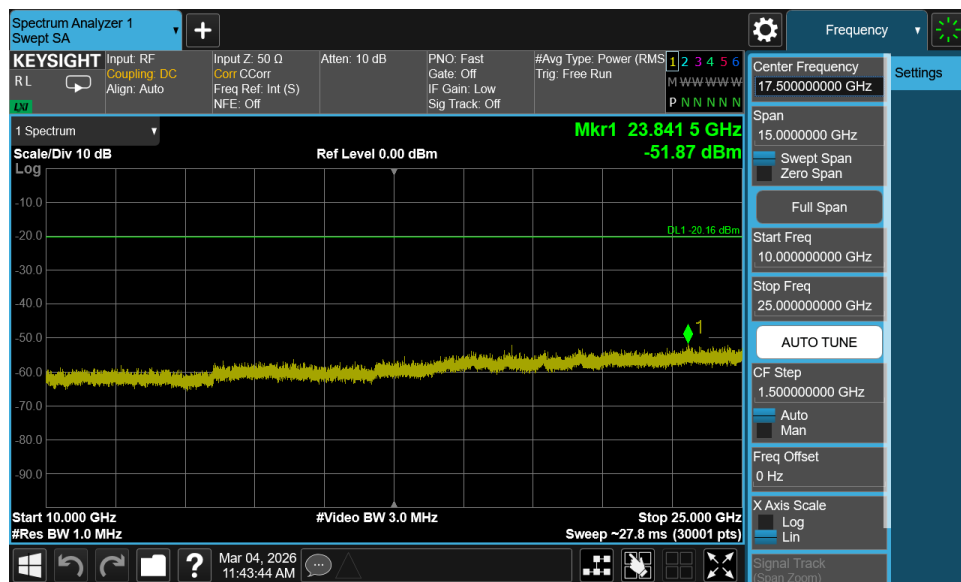


Plot 7-104. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 82 of 103		

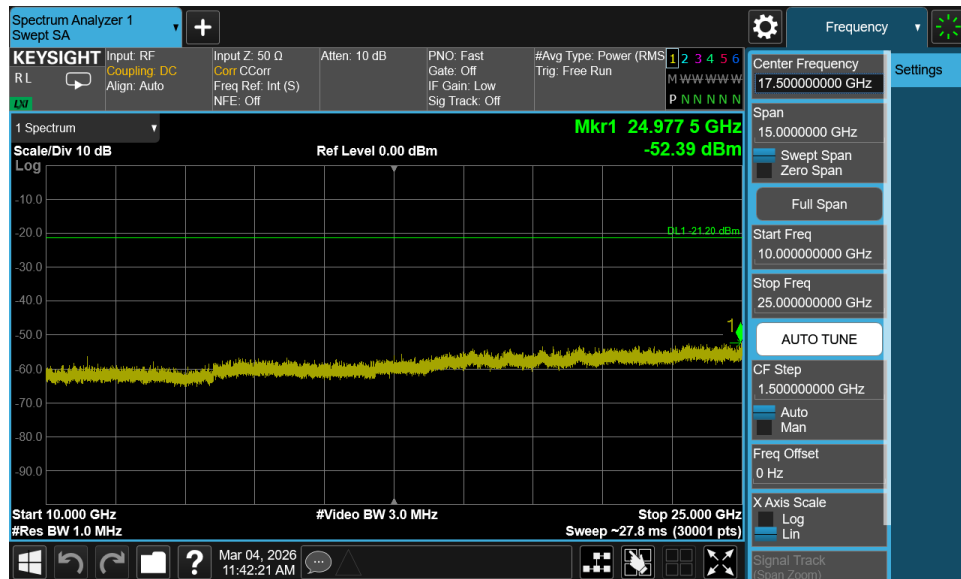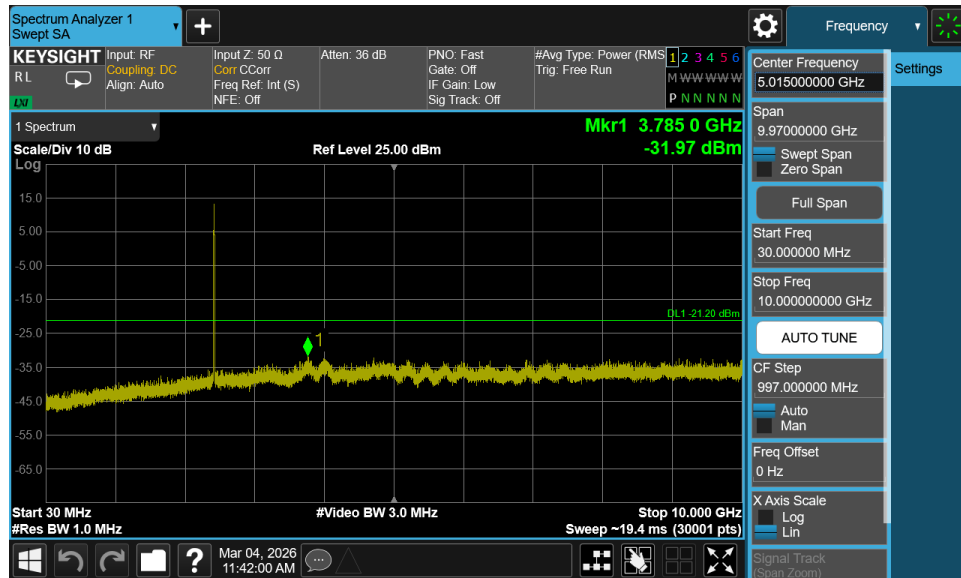

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 83 of 103

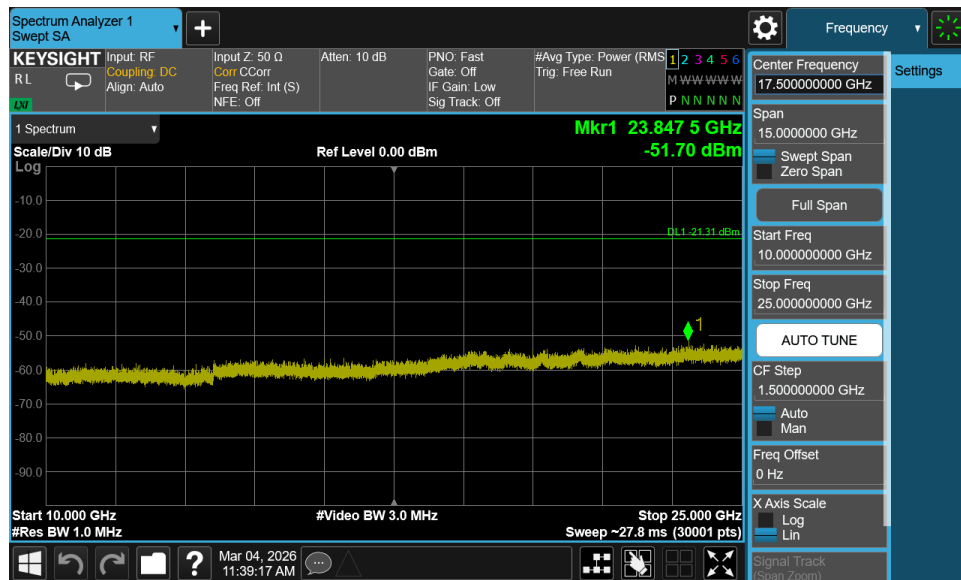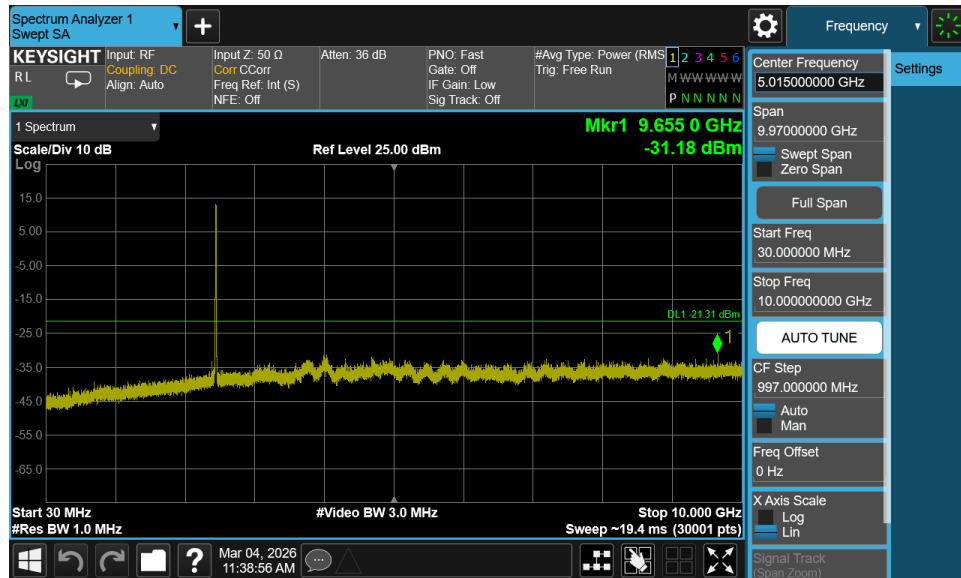

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 84 of 103		

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-11. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings – Above 1GHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 85 of 103		

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

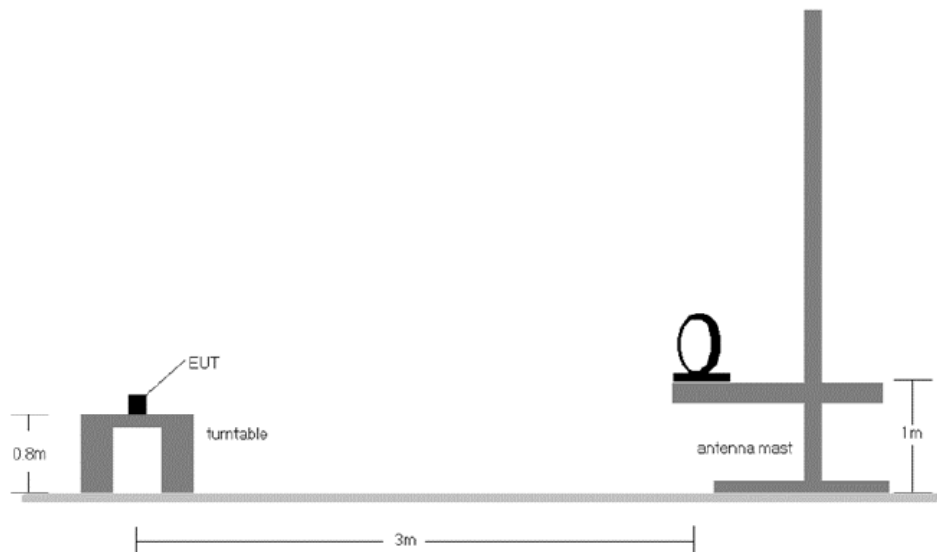


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 86 of 103

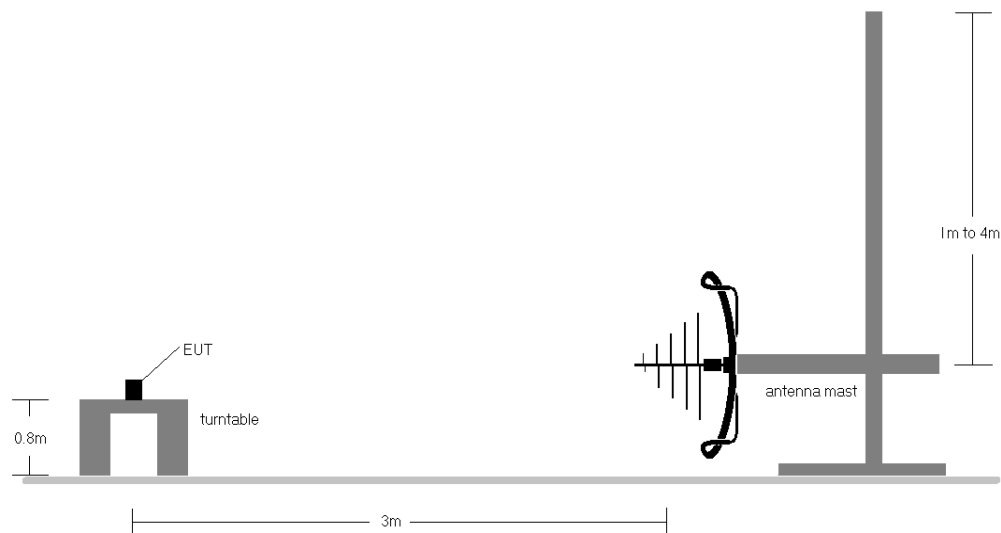


Figure 7-7. Radiated Test Setup < 1GHz

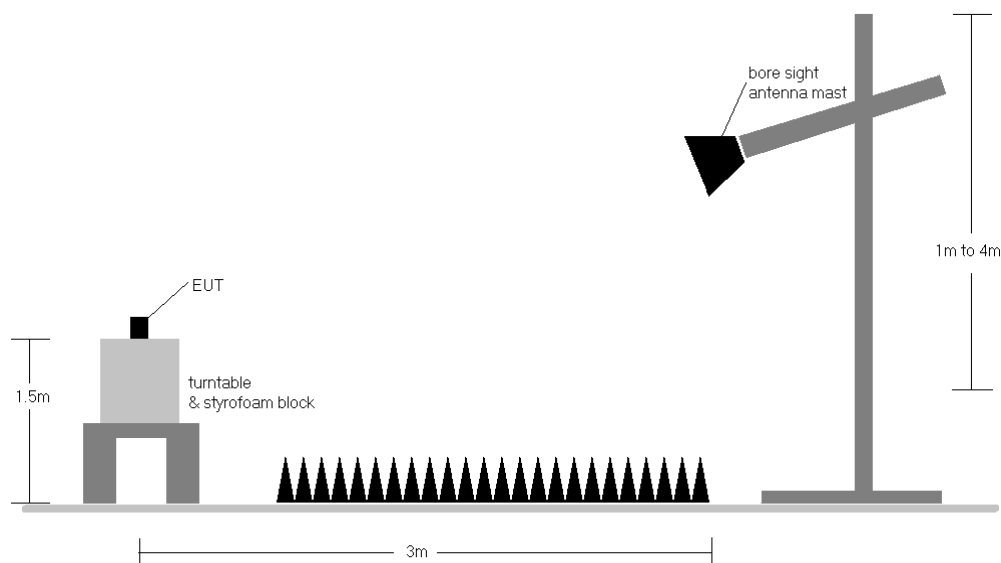


Figure 7-8. Radiated Test Setup > 1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10:2020 Section 11.12.2 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 87 of 103		

4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
10. No spurious emissions were detected within 20dB of the limit below 30MHz.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
13. In this section, plots showing measurements shown as "channel power" are recorded using the integration methods described in Section 11.12.3.2 of ANSI C63.10:2020 for average and peak measurements as allowed per Section 12.7.4.4.1. Also, the average measurements include the duty cycle correction factor shown in Section 2.2 of this report.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$


Radiated Band Edge Measurement Offset

The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 88 of 103		

MIMO Radiated Spurious Emission Measurements

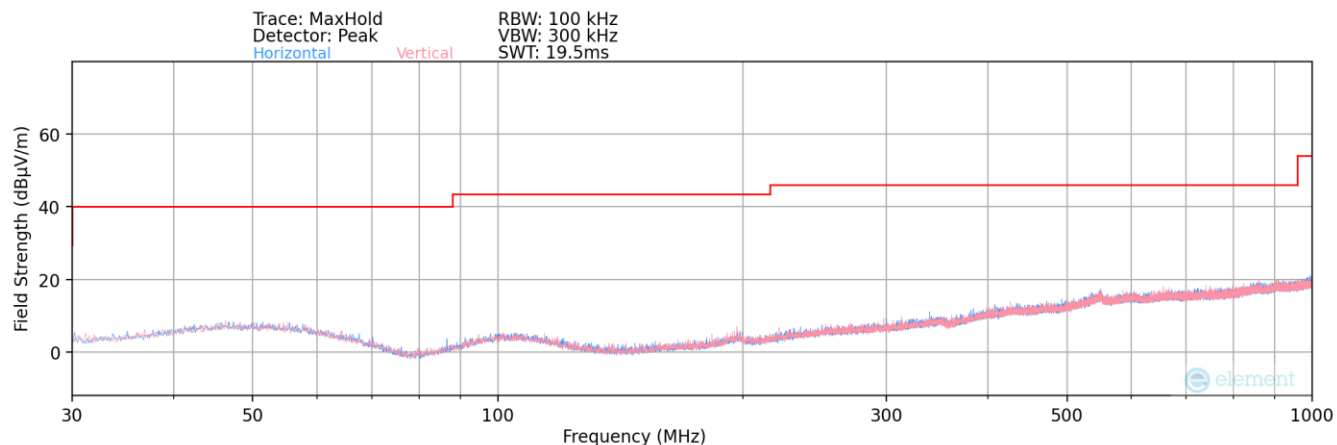


Plot 7-109. Radiated Spurious Plot below 1GHz MIMO


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
76.13	Quasi-Peak	H	-	-	-77.51	-18.67	10.82	40.00	-29.18

Table 7-12. Radiated Measurements below 1GHz MIMO


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)		Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 89 of 103

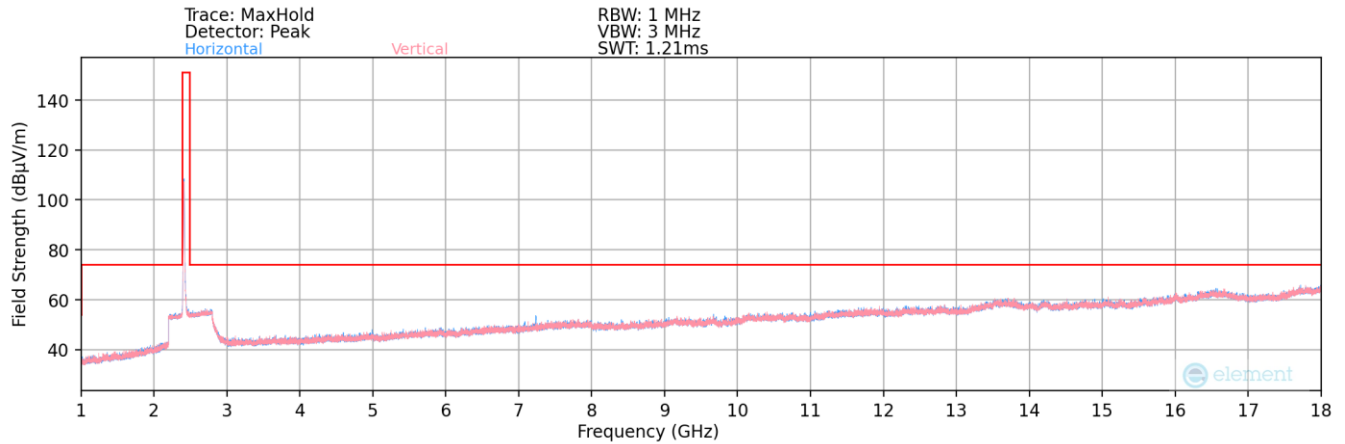

Plot 7-110. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. OFDM 1)

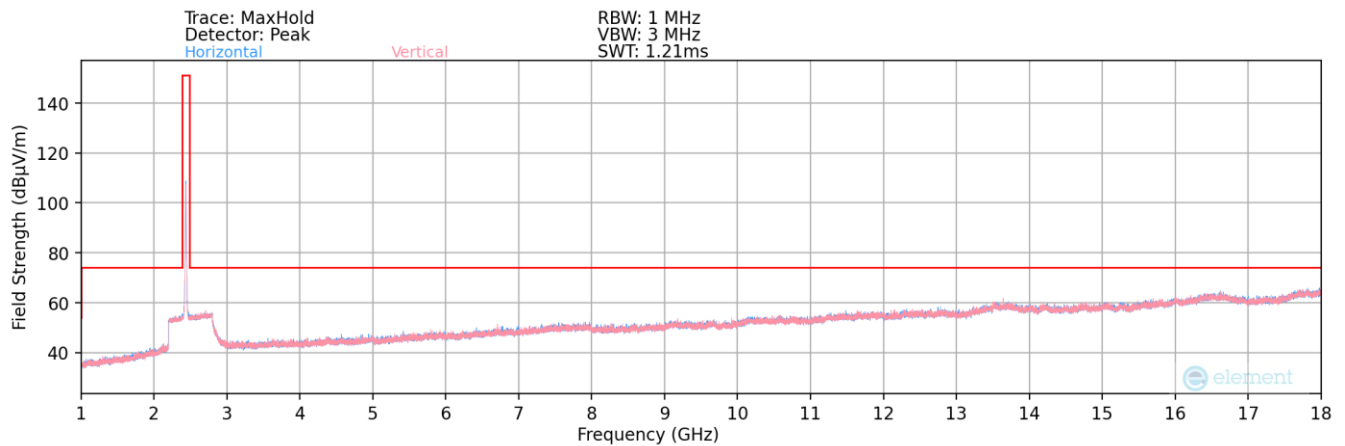


Plot 7-111. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. OFDM 6)

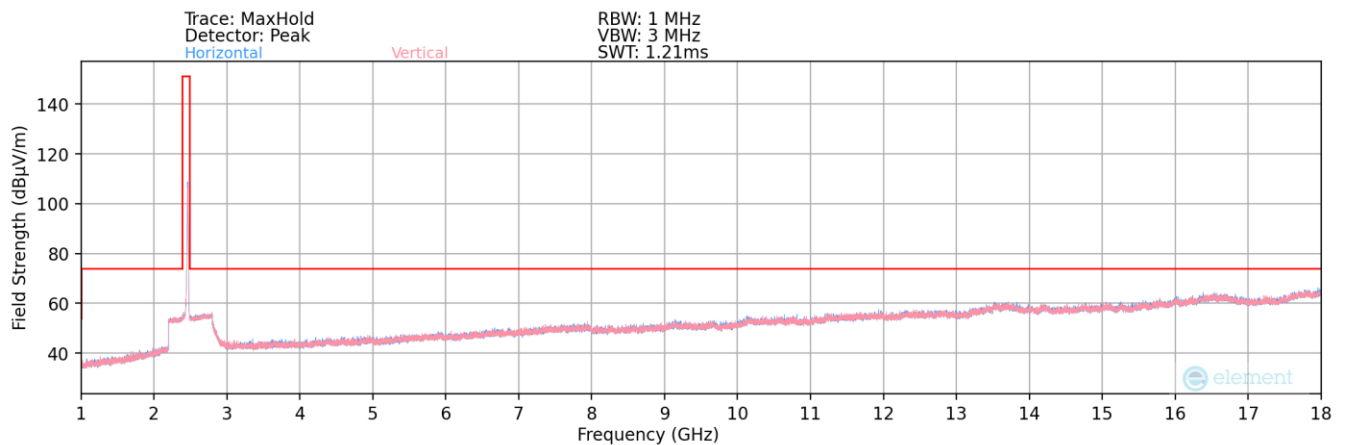

Plot 7-112. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. OFDM 11)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 90 of 103		

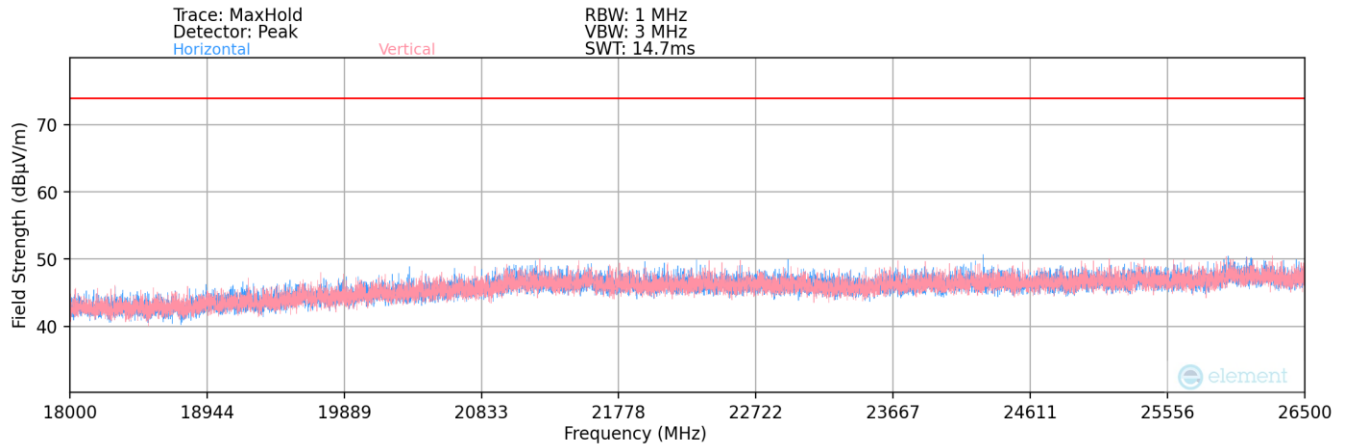

Plot 7-113. Radiated Spurious Plot above 18GHz MIMO

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	268	109	-80.15	8.97	35.82	53.98	-18.16
4824.00	Peak	H	268	109	-70.42	8.97	45.55	73.98	-28.43
12060.00	Avg	H	-	-	-83.67	21.67	45.00	53.98	-8.98
12060.00	Peak	H	-	-	-73.23	21.67	55.44	73.98	-18.54

Table 7-13. Radiated Measurements MIMO

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 91 of 103		

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	151	231	-75.79	9.40	40.61	53.98	-13.37
4874.00	Peak	H	151	231	-68.80	9.40	47.60	73.98	-26.38
7311.00	Avg	H	228	161	-75.46	14.98	46.52	53.98	-7.46
7311.00	Peak	H	228	161	-71.03	14.98	50.95	73.98	-23.03
12185.00	Avg	H	-	-	-84.01	22.57	45.56	53.98	-8.42
12185.00	Peak	H	-	-	-74.32	22.57	55.25	73.98	-18.73

Table 7-14. Radiated Measurements MIMO

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	215	52	-79.24	9.51	37.27	53.98	-16.71
4924.00	Peak	H	215	52	-70.35	9.51	46.16	73.98	-27.82
7386.00	Avg	H	222	157	-71.58	15.18	50.60	53.98	-3.38
7386.00	Peak	H	222	157	-65.61	15.18	56.57	73.98	-17.41
12310.00	Avg	H	-	-	-84.26	22.85	45.59	53.98	-8.39
12310.00	Peak	H	-	-	-74.12	22.85	55.73	73.98	-18.25

Table 7-15. Radiated Measurements MIMO

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)		Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 92 of 103

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	336	51	-70.64	2.48	38.84	53.98	-15.13
4924.00	Peak	H	336	51	-63.75	2.48	45.73	73.98	-28.24
7386.00	Avg	H	369	22	-67.86	8.90	48.04	53.98	-5.94
7386.00	Peak	H	369	22	-61.22	8.90	54.68	73.98	-19.30
12310.00	Avg	H	-	-	-80.94	12.71	38.77	53.98	-15.21
12310.00	Peak	H	-	-	-69.17	12.71	50.54	73.98	-23.44


Table 7-16. Radiated Measurements MIMO with WCP

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 93 of 103

MIMO Radiated Restricted Band Edge Measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

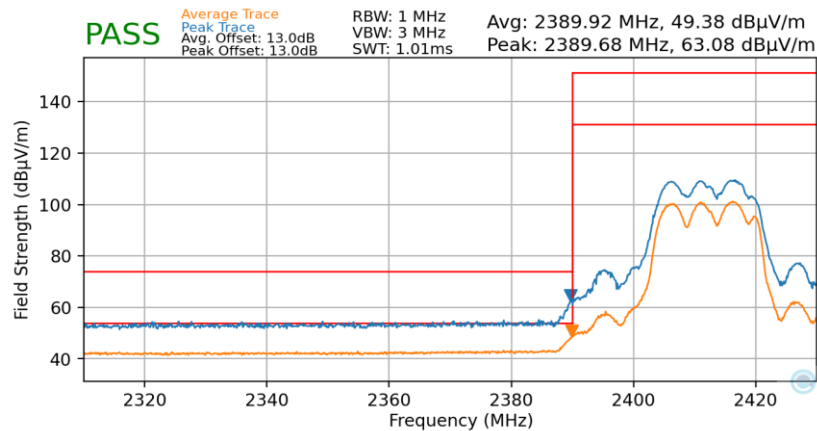

Plot 7-114. Radiated Restricted Lower Band Edge Measurement MIMO (Average & Peak)


Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

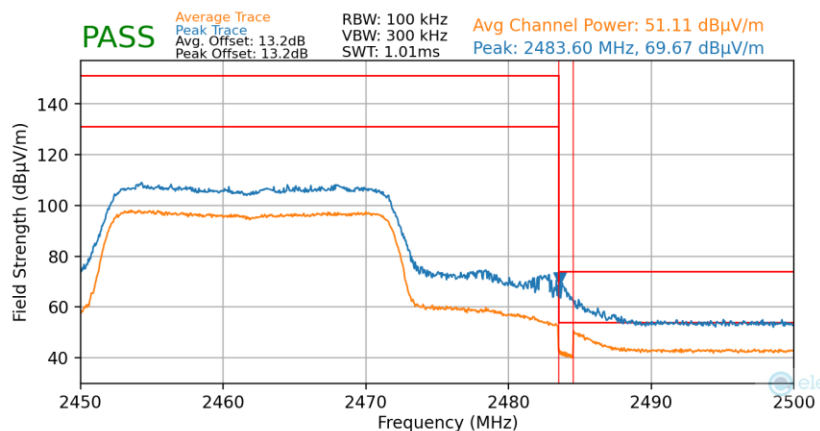

Plot 7-115. Radiated Restricted Upper Band Edge Measurement MIMO (Average & Peak)


FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 94 of 103		

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

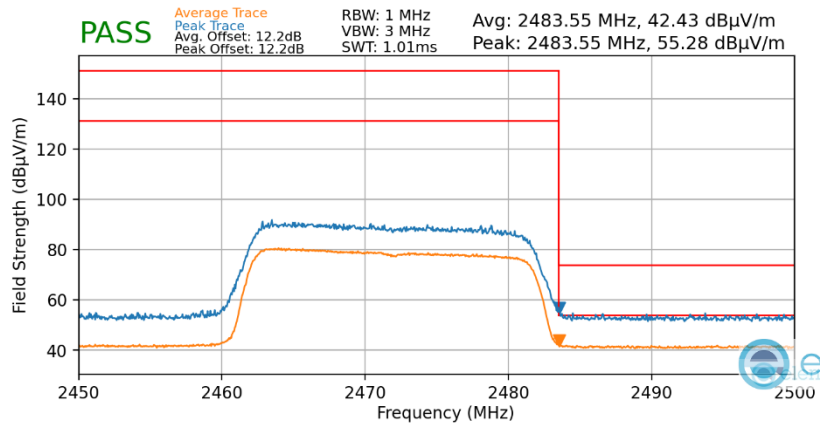

Plot 7-116. Radiated Restricted Upper Band Edge Measurement MIMO (Average & Peak)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

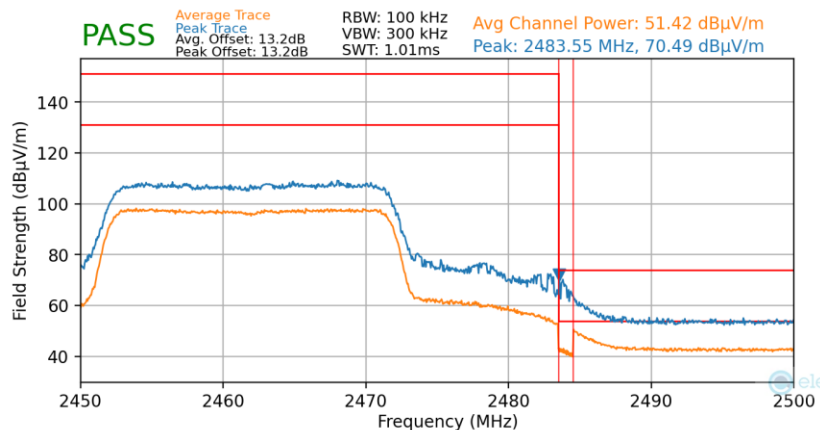

Plot 7-117. Radiated Restricted Upper Band Edge Measurement MIMO (Average & Peak) – with WCP

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 95 of 103

7.8 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-17. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 96 of 103		

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


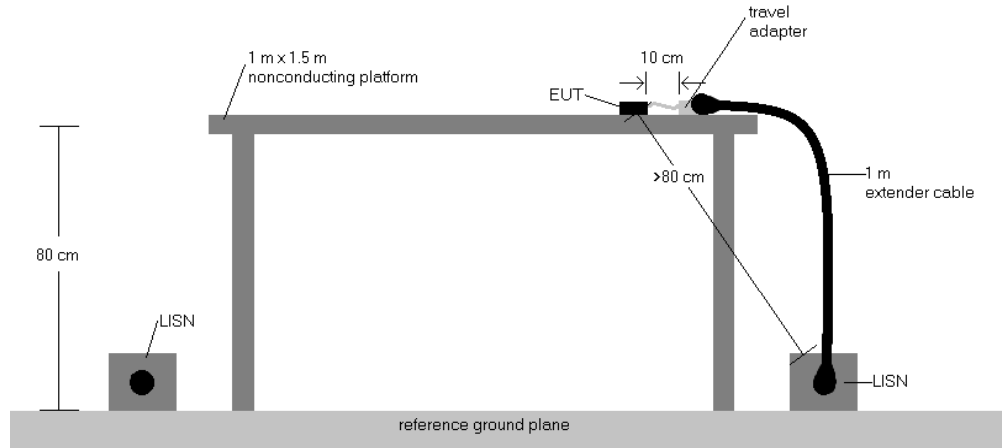


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 97 of 103		

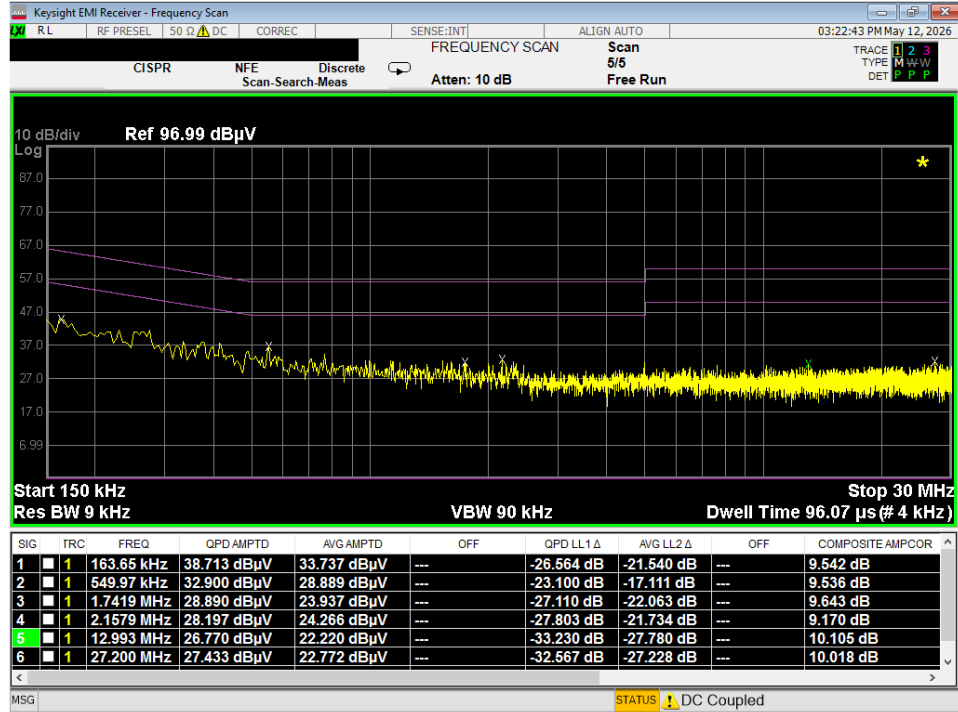


Plot 7-118. Line Conducted Plot with 802.11b (L1)

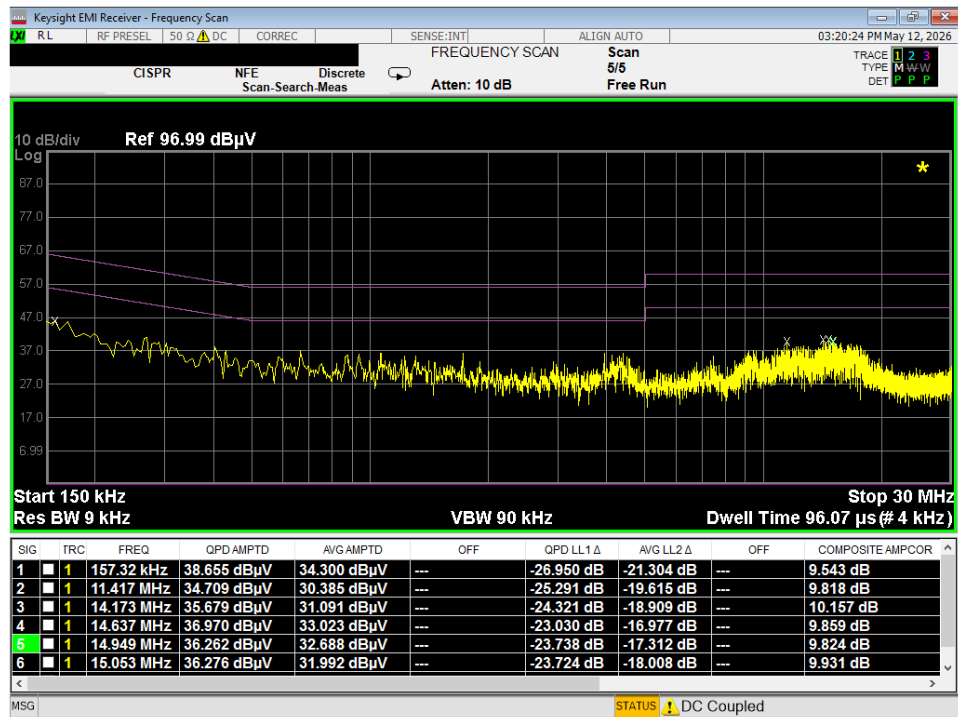


Plot 7-119. Line Conducted Plot with 802.11b (N)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 98 of 103		

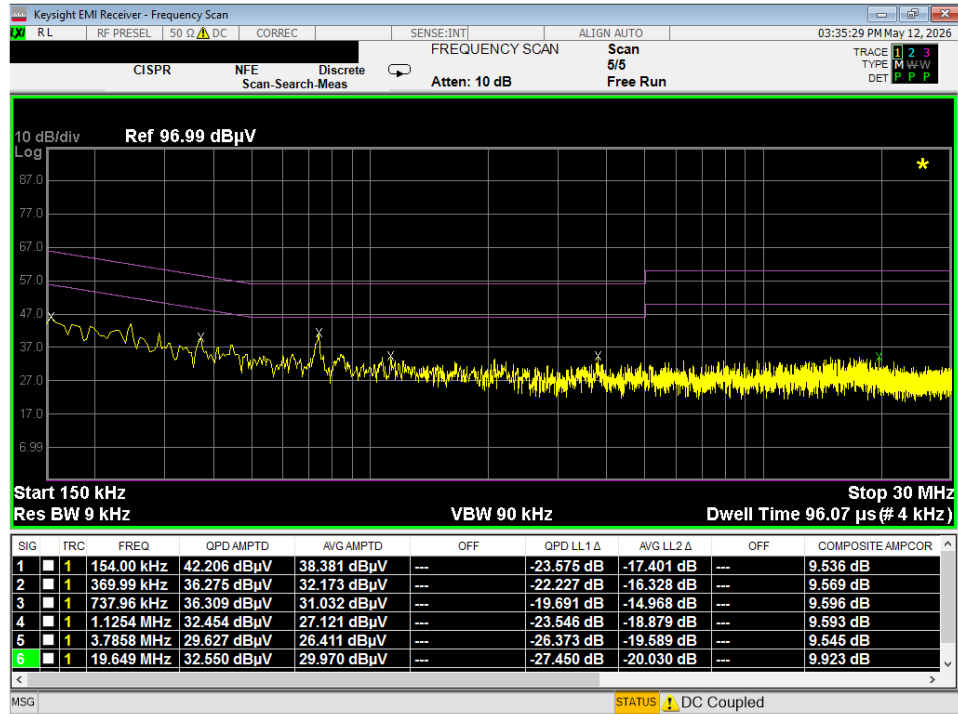

Plot 7-120. Line Conducted Plot with 802.11b (L1) - WCP

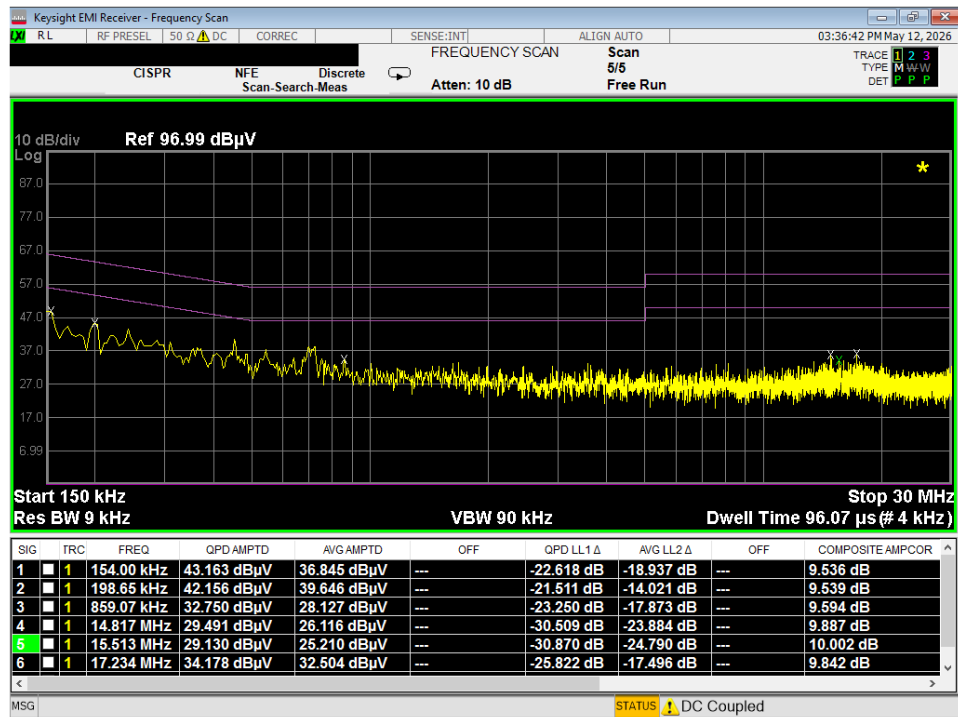

Plot 7-121. Line Conducted Plot with 802.11b (N) - WCP

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 99 of 103		

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF776JPN** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules. The data referenced from **FCC ID: A3LSMF776U** (Model SM-F776U) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMF776JPN**.

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 100 of 103

9.0 APPENDIX A – DATA REFERENCING RESULTS

Overview

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10-2020.

Notes

1. Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – Model: SC-55G

2.4GHz WIFI (20MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2437	6	Average	16.59	17.99	20.36	30.00	-9.64	-3.74	16.62	36.02	-19.40
2437	6	Peak	24.70	26.64	28.79	30.00	-1.21	-3.74	25.04	36.02	-10.98

Table 9-1. Conducted Output Power Measurements (Spot-check)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)		Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 101 of 103

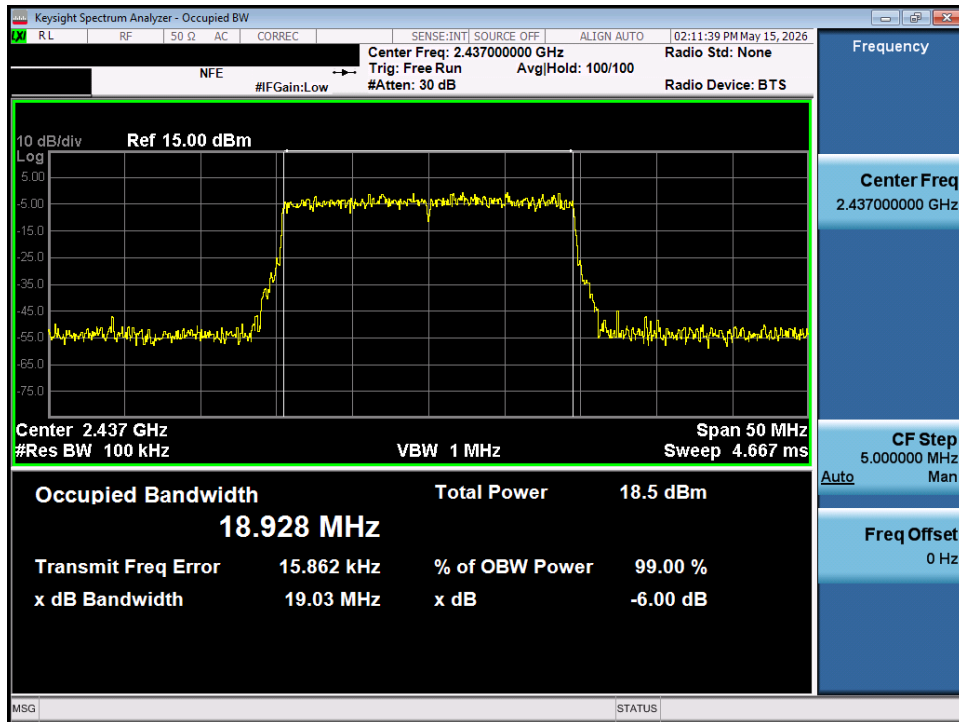


Table 9-2. 6dB Bandwidth Plot MIMO ANT1 (802.11be – Ch. 6) (Spot-check)

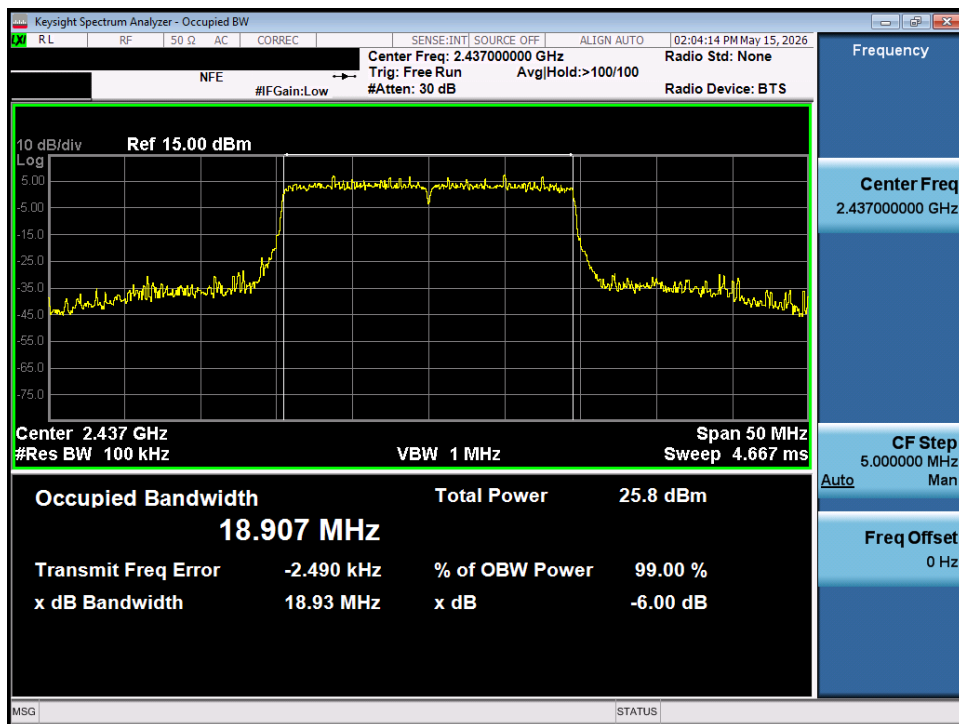


Table 9-3. 6dB Bandwidth Plot MIMO ANT2 (802.11be – Ch. 6) (Spot-check)

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 102 of 103		


Radiated Spot-Checks – Model: SC-55G

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
7386.00	Avg	H	101	342	-74.00	15.18	48.18	53.98	-5.80
7386.00	Peak	H	101	342	-66.66	15.18	55.53	73.98	-18.45

Table 9-4. RSE Measurements (Spot-check)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

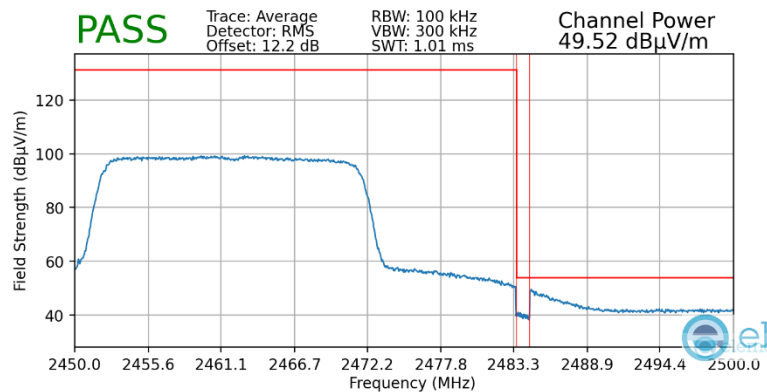

Plot 9-1. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: A3LSMF776J	Variant Model: A3LSMF776JPN	Deviation (dB)	Max Deviation (dB)	Pass/Fail
15.247(b)(3)	Conducted Output Power	802.11be MIMO Ch.6 - Average	dBm	30	20.71	20.36	-0.35	1	PASS
2.1049, 15.247(a)(2)	6dB Bandwidth	802.11be Ch.6 MIMO ANT 1 / ANT 2	MHz	0.5	18.90 / 18.53	19.03/18.93	0.13 / 0.4	N/A	PASS
15.209	Radiated Spurious Emissions	802.11b MIMO Ch.11 - 7386MHz - Average	dBμV/m	53.98	50.6	48.18	-2.42	3	PASS
15.209	Radiated Band Edge Emissions	802.11be MIMO Ch.11 - Average	dBμV/m	53.98	51.11	49.52	-1.59	3	PASS

Table 9-5. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: A3LSMF776JPN	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 5/18/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 103 of 103		