


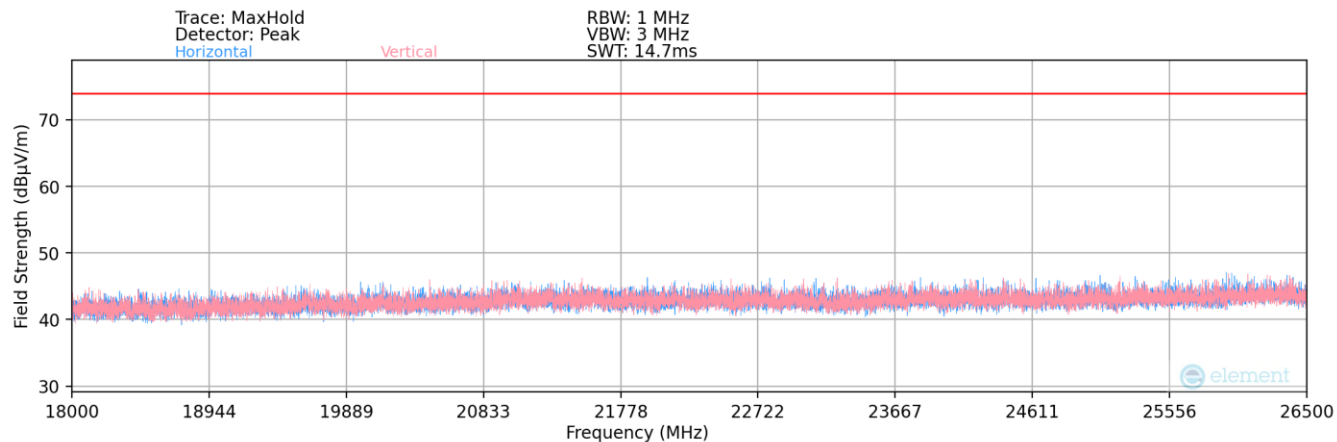

Plot 7-200. Radiated Spurious Plot above 18GHz (Bluetooth (LE)) – Ant 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 140 of 159

Radiated Spurious Emission Measurements

\$15.205 \$15.209 \$15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 37

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	266	274	-74.62	-0.81	31.57	53.98	-22.41
4804.00	Peak	H	266	274	-62.50	-0.81	43.69	73.98	-30.29
12010.00	Avg	H	388	203	-77.89	9.90	39.02	53.98	-14.96
12010.00	Peak	H	388	203	-65.87	9.90	51.03	73.98	-22.95

Table 7-20. Radiated Measurements @ 3 meters – Ant 2

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	217	102	-74.61	-0.53	31.86	53.98	-22.12
4880.00	Peak	H	217	102	-62.47	-0.53	44.01	73.98	-29.97
7320.00	Avg	H	117	106	-76.44	4.40	34.96	53.98	-19.02
7320.00	Peak	H	117	106	-64.38	4.40	47.01	73.98	-26.97
12200.00	Avg	H	375	112	-78.05	9.31	38.25	53.98	-15.72
12200.00	Peak	H	375	112	-65.59	9.31	50.72	73.98	-23.26

Table 7-21. Radiated Measurements @ 3 meters – Ant 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 141 of 159

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	382	152	-74.75	-0.36	31.89	53.98	-22.09
4960.00	Peak	H	382	152	-62.73	-0.36	43.91	73.98	-30.07
7440.00	Avg	H	383	358	-75.95	4.30	35.35	53.98	-18.63
7440.00	Peak	H	383	358	-64.18	4.30	47.12	73.98	-26.86
12400.00	Avg	H	392	268	-78.96	9.55	37.59	53.98	-16.39
12400.00	Peak	H	392	268	-66.51	9.55	50.05	73.98	-23.93

Table 7-22. Radiated Measurements @ 3 meters – Ant 2

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 17


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	185	347	-74.55	-0.53	31.92	53.98	-22.06
4880.00	Peak	H	185	347	-63.00	-0.53	43.48	73.98	-30.50
7320.00	Avg	H	195	318	-76.37	4.40	35.03	53.98	-18.95
7320.00	Peak	H	195	318	-63.89	4.40	47.51	73.98	-26.47
12200.00	Avg	H	277	23	-78.05	9.31	38.26	53.98	-15.72
12200.00	Peak	H	277	23	-65.45	9.31	50.85	73.98	-23.12

Table 7-23. Radiated Measurements @ 3 meters – Ant 2 – with WCP


FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 142 of 159

Radiated Spurious Emission Measurements – Dual


§15.205 §15.209 §15.247(d)

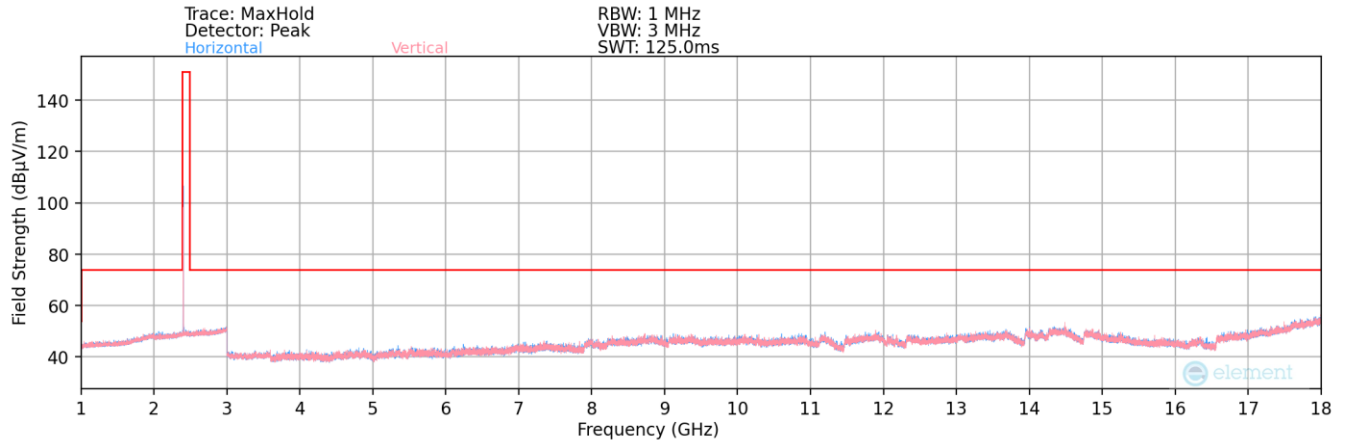

Plot 7-201. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 37) – Dual

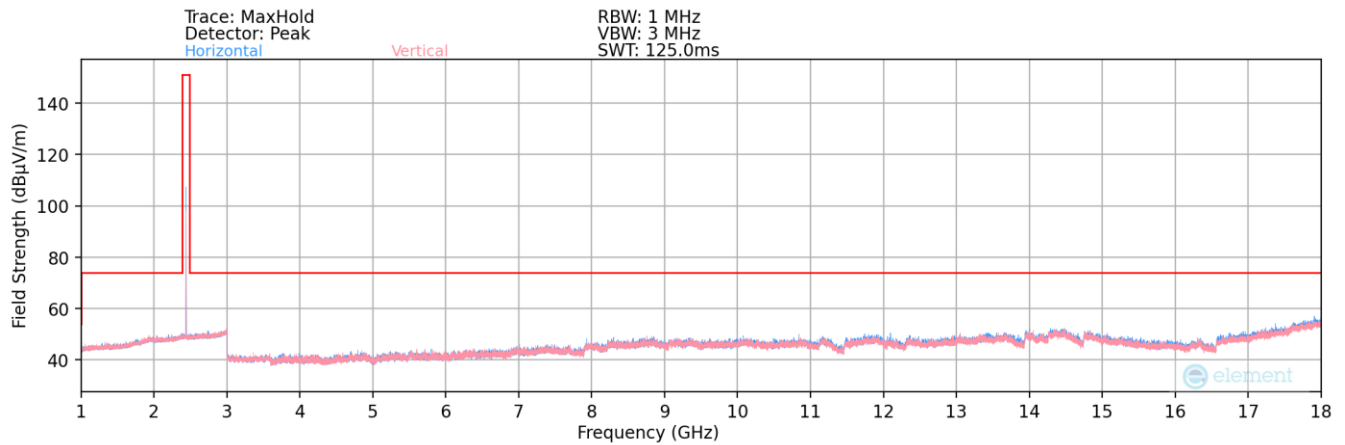


Plot 7-202. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 17) – Dual

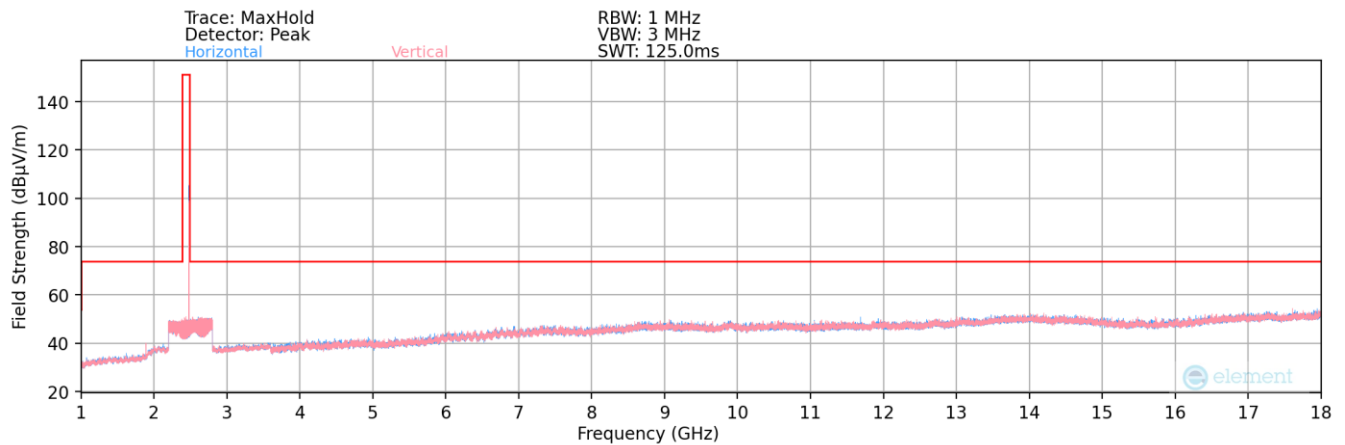

Plot 7-203. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Dual

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 143 of 159		

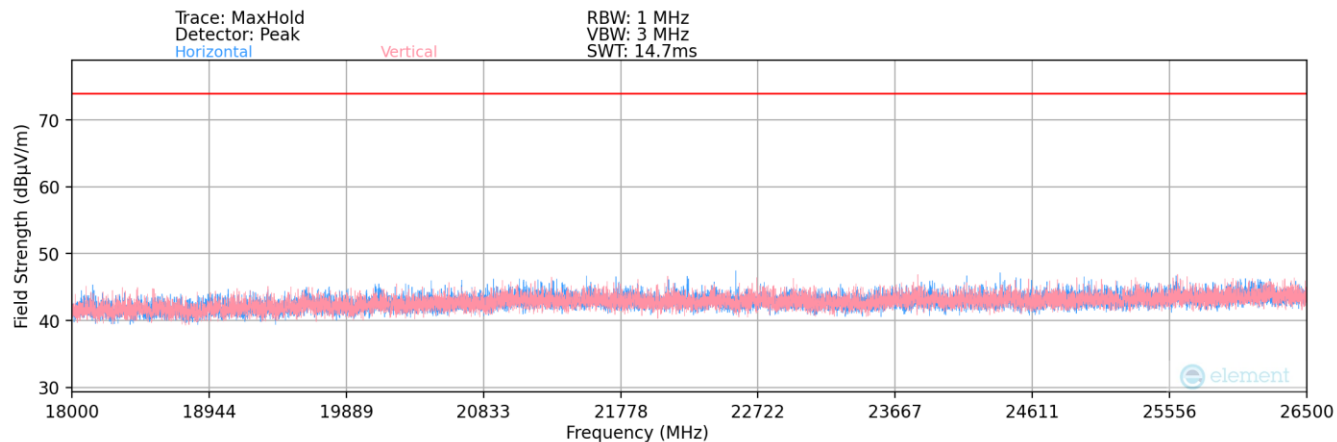

Plot 7-204. Radiated Spurious Plot above 18GHz (Bluetooth (LE)) – Dual

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 144 of 159

Radiated Spurious Emission Measurements

\$15.205 \$15.209 \$15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 37

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	204	285	-74.61	-0.81	31.58	53.98	-22.40
4804.00	Peak	H	204	285	-62.49	-0.81	43.70	73.98	-30.28
12010.00	Avg	H	181	86	-77.89	9.90	39.01	53.98	-14.96
12010.00	Peak	H	181	86	-65.26	9.90	51.65	73.98	-22.33

Table 7-24. Radiated Measurements @ 3 meters – Dual

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	348	135	-74.60	-0.53	31.87	53.98	-22.11
4880.00	Peak	H	348	135	-62.30	-0.53	44.17	73.98	-29.81
7320.00	Avg	H	367	113	-76.36	4.40	35.04	53.98	-18.94
7320.00	Peak	H	367	113	-64.15	4.40	47.24	73.98	-26.73
12200.00	Avg	H	180	239	-78.04	9.31	38.26	53.98	-15.72
12200.00	Peak	H	180	239	-65.91	9.31	50.40	73.98	-23.58

Table 7-25. Radiated Measurements @ 3 meters – Dual

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	135	304	-74.68	-0.36	31.96	53.98	-22.02
4960.00	Peak	H	135	304	-62.64	-0.36	44.00	73.98	-29.98
7440.00	Avg	H	247	90	-75.96	4.30	35.35	53.98	-18.63
7440.00	Peak	H	247	90	-63.80	4.30	47.50	73.98	-26.48
12400.00	Avg	H	268	335	-78.97	9.47	37.50	53.98	-16.48
12400.00	Peak	H	268	335	-66.89	9.45	49.56	73.98	-24.42
3918.94	Peak	H	398	95	-74.61	-1.49	30.90	73.98	-43.08
3918.94	Peak	H	398	95	-74.61	-1.49	30.90	73.98	-43.08

Table 7-26. Radiated Measurements @ 3 meters – Dual

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	264	275	-74.60	-0.53	31.87	53.98	-22.11
4880.00	Peak	H	264	275	-62.41	-0.53	44.06	73.98	-29.92
7320.00	Avg	H	275	114	-76.43	4.42	35.00	53.98	-18.98
7320.00	Peak	H	275	114	-63.57	4.43	47.86	73.98	-26.12
12200.00	Avg	H	273	156	-78.05	9.31	38.25	53.98	-15.72
12200.00	Peak	H	273	156	-66.15	9.31	50.15	73.98	-23.83

Table 7-27. Radiated Measurements @ 3 meters – Dual – with WCP

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 146 of 159

7.8 Radiated Restricted Band Edge Measurements


\$15.205 \$15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

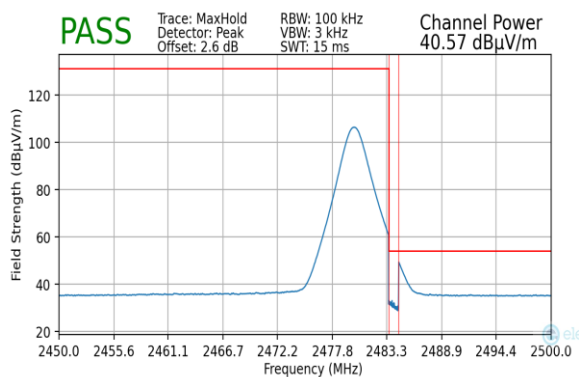


Plot 7-205. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 1

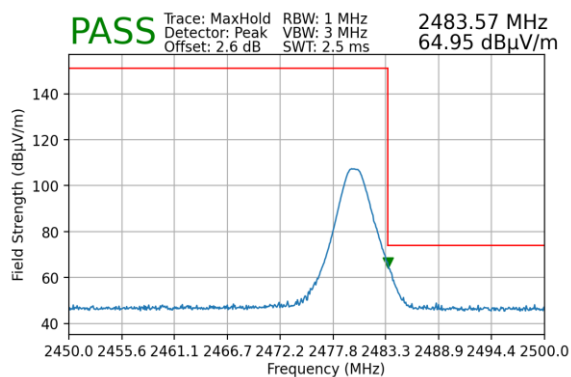

Plot 7-206. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 1

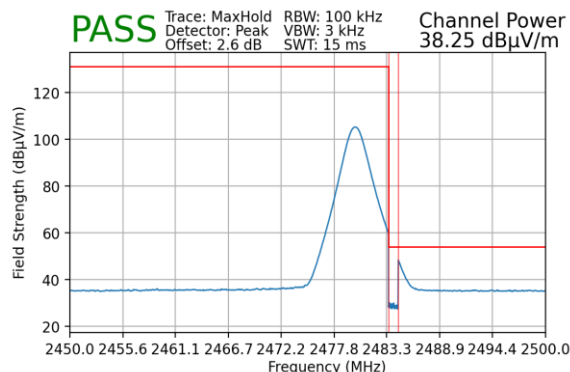


Plot 7-207. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 1 - WCP

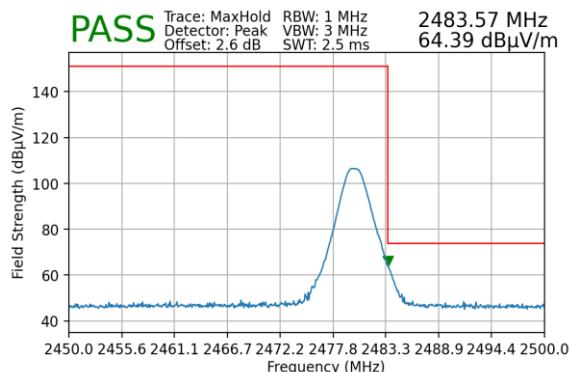


Plot 7-208. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 1 - WCP

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 147 of 159


Bluetooth Mode: LE
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

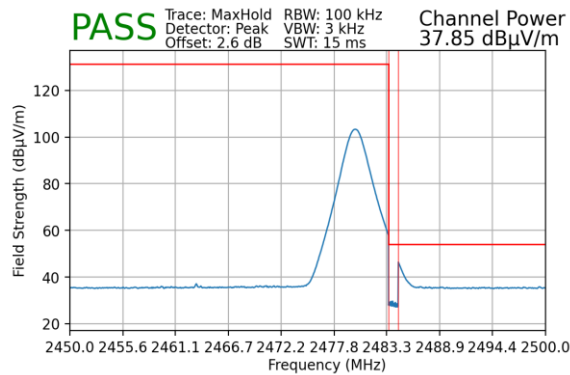


Plot 7-209. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 2

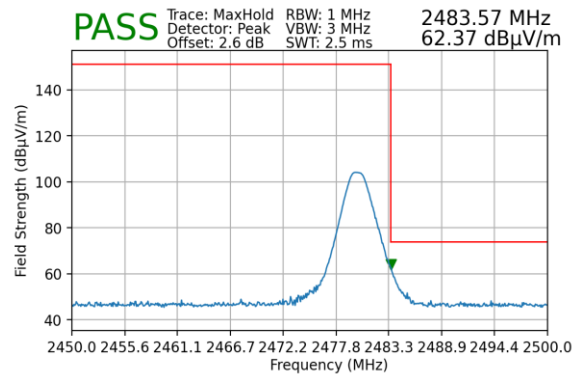

Plot 7-210. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 2

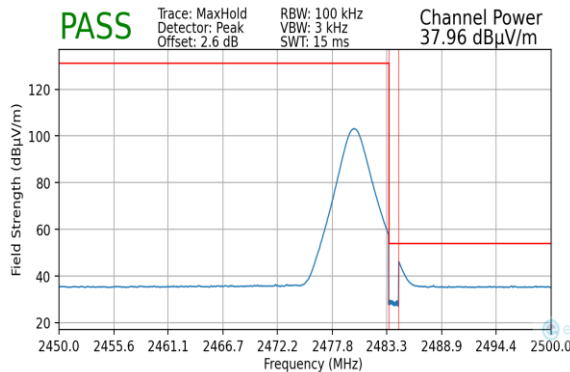


Plot 7-211. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 2 - WCP

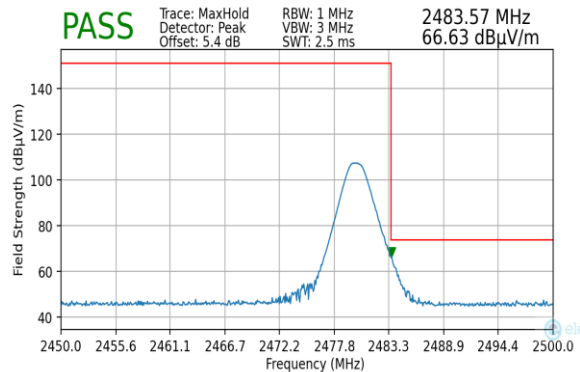


Plot 7-212. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 2 - WCP

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 148 of 159		


Bluetooth Mode: LE
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 39

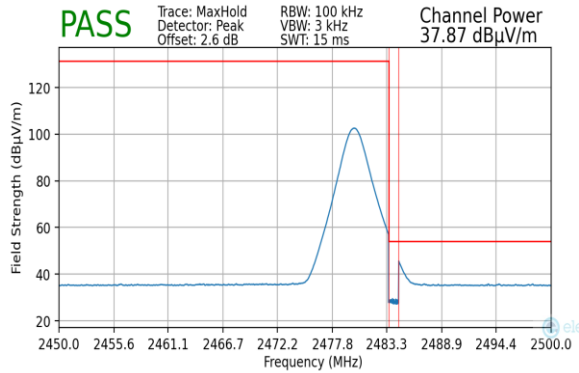


Plot 7-213. Radiated Restricted Upper Band Edge Measurement (Average) – Dual

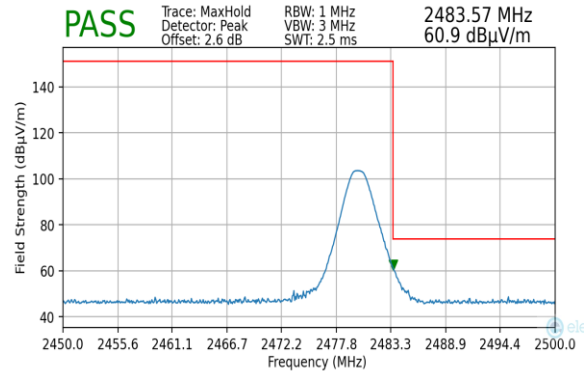

Plot 7-214. Radiated Restricted Upper Band Edge Measurement (Peak) – Dual

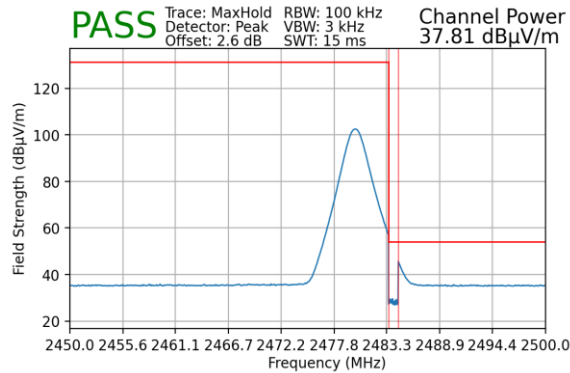

Plot 7-215. Radiated Restricted Upper Band Edge Measurement (Average) – Dual - WCP

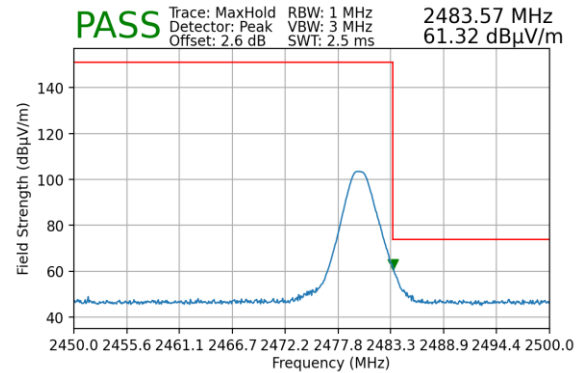

Plot 7-216. Radiated Restricted Upper Band Edge Measurement (Peak) – Dual - WCP

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 149 of 159

7.9 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-28 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-28. Radiated Limits

Test Procedures Used

ANSI C63.10:2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 150 of 159

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

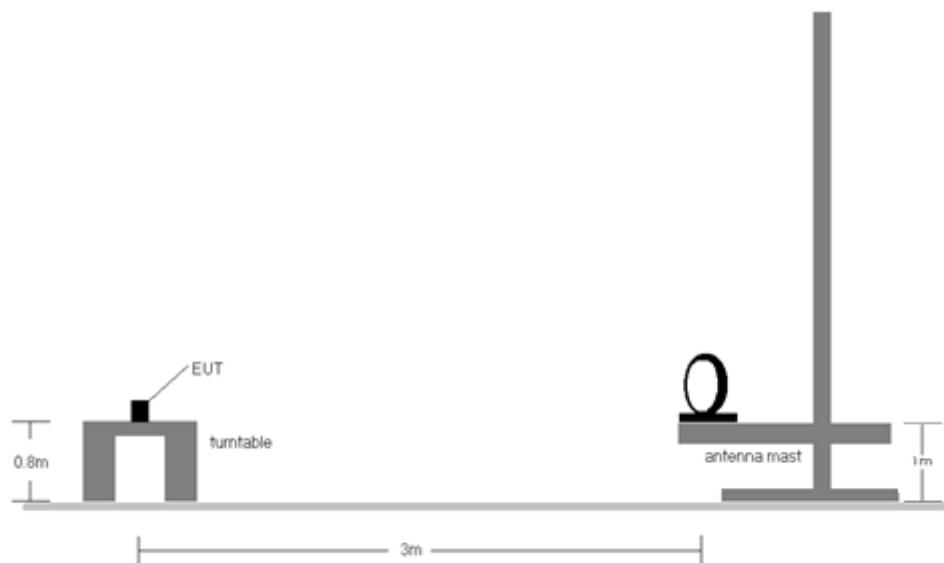


Figure 7-7. Radiated Test Setup < 30Mhz

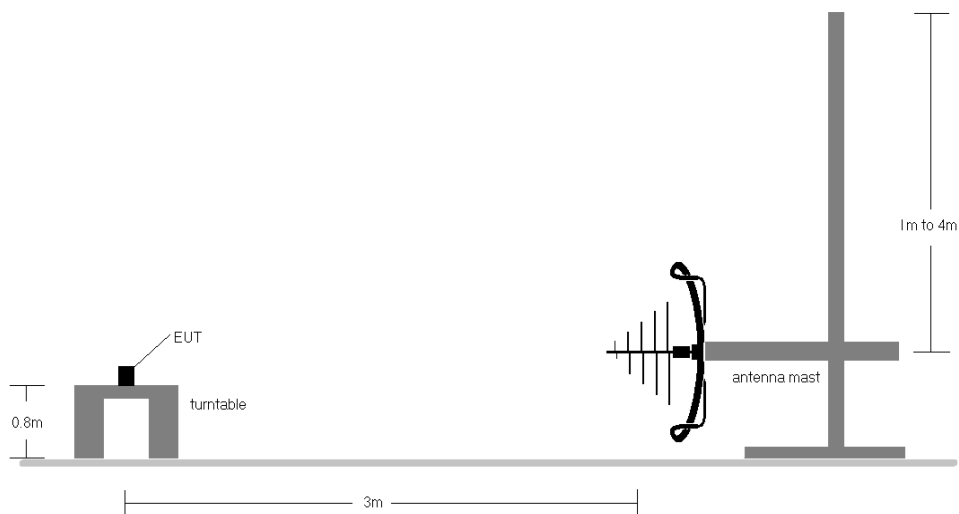


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 151 of 159


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-28.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 152 of 159

Radiated Spurious Emissions Measurements (Below 1GHz)


§15.209; RSS-Gen [8.9]

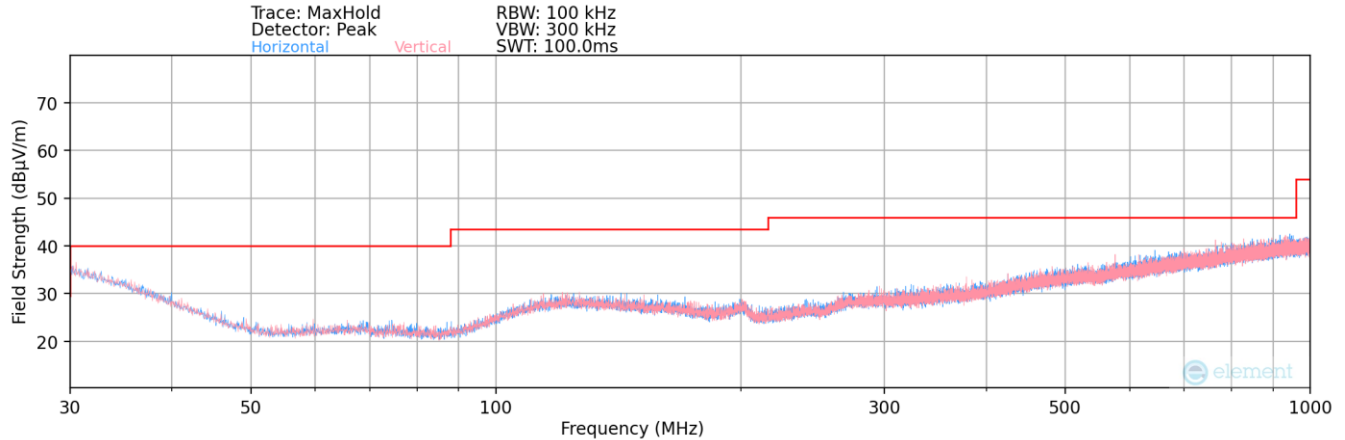

Plot 7-217. Radiated Spurious Plot below 1GHz – Ant 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
618.35	Quasi-Peak	H	-	-	-96.01	27.10	38.09	46.02	-7.93

Table 7-29. Radiated Spurious Emissions Below 1GHz – Ant 1

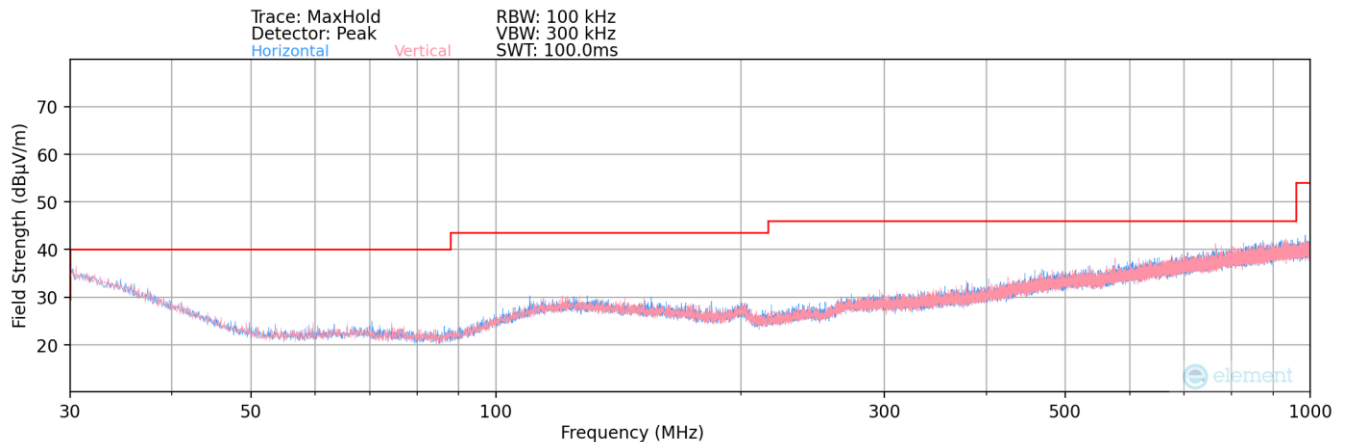


Plot 7-218. Radiated Spurious Plot below 1GHz – Ant 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
183.95	Quasi-Peak	H	-	-	-96.01	27.10	38.09	43.52	-5.44

Table 7-30. Radiated Spurious Emissions Below 1GHz – Ant 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		

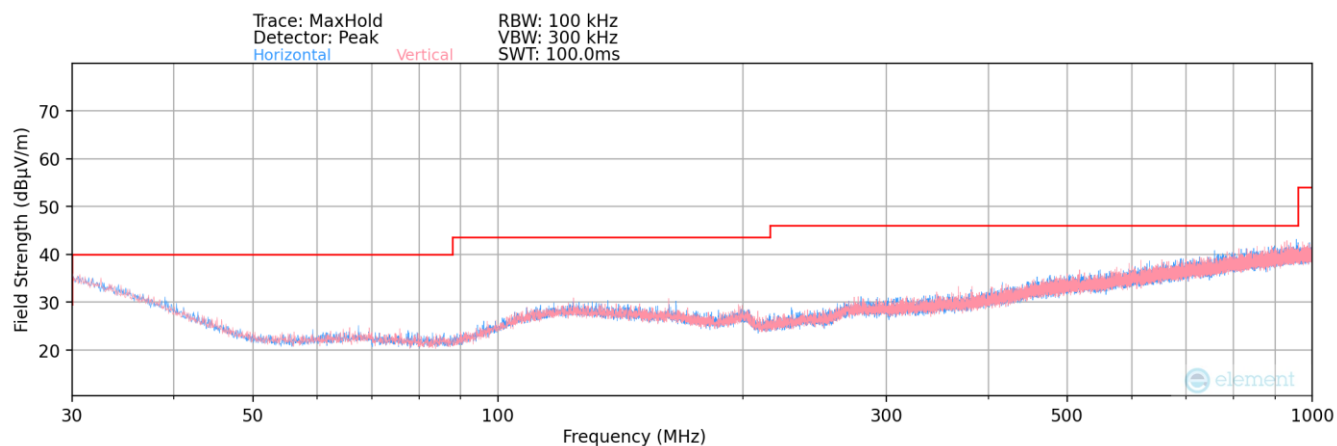

Plot 7-219. Radiated Spurious Plot below 1GHz – Dual

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
758.55	Quasi-Peak	H	-	-	-95.38	27.10	38.72	46.02	-7.30

Table 7-31. Radiated Spurious Emissions Below 1GHz – Dual

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 154 of 159

7.10 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-32. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 155 of 159

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


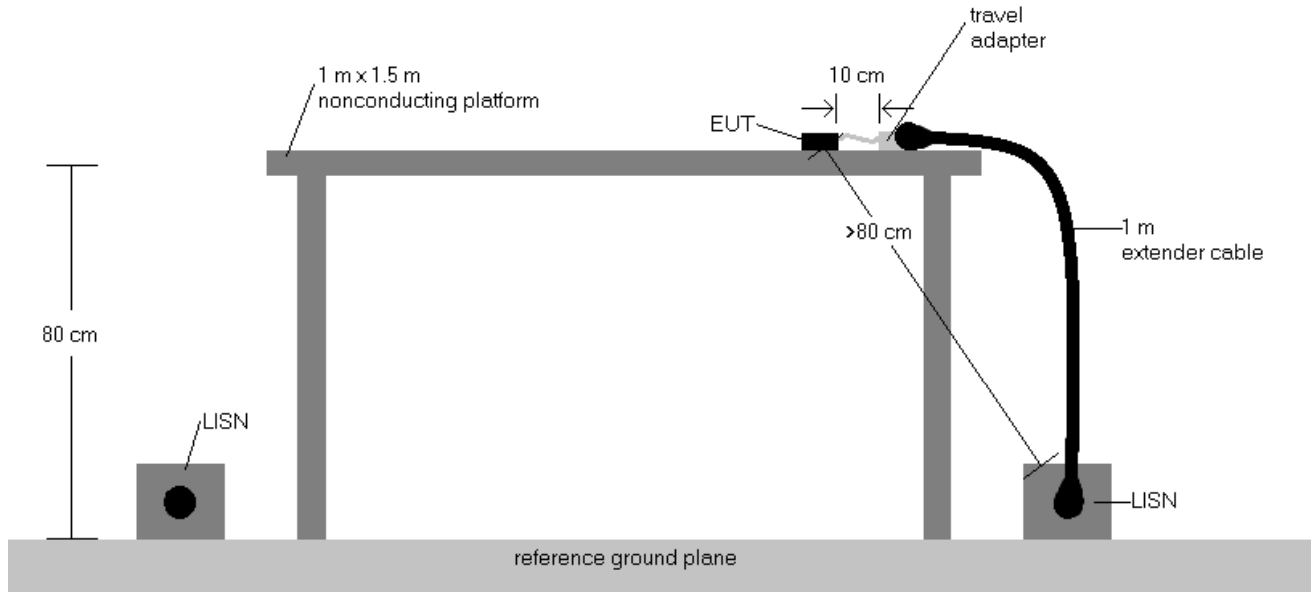


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 156 of 159

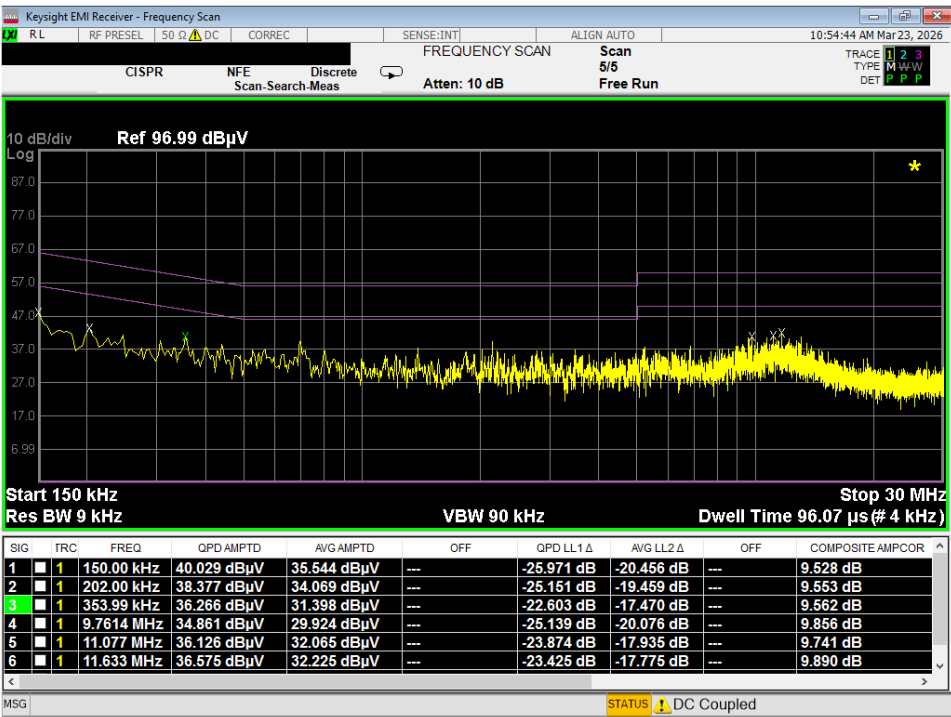

Plot 7-220. Line-Conducted Test Plot (L1)


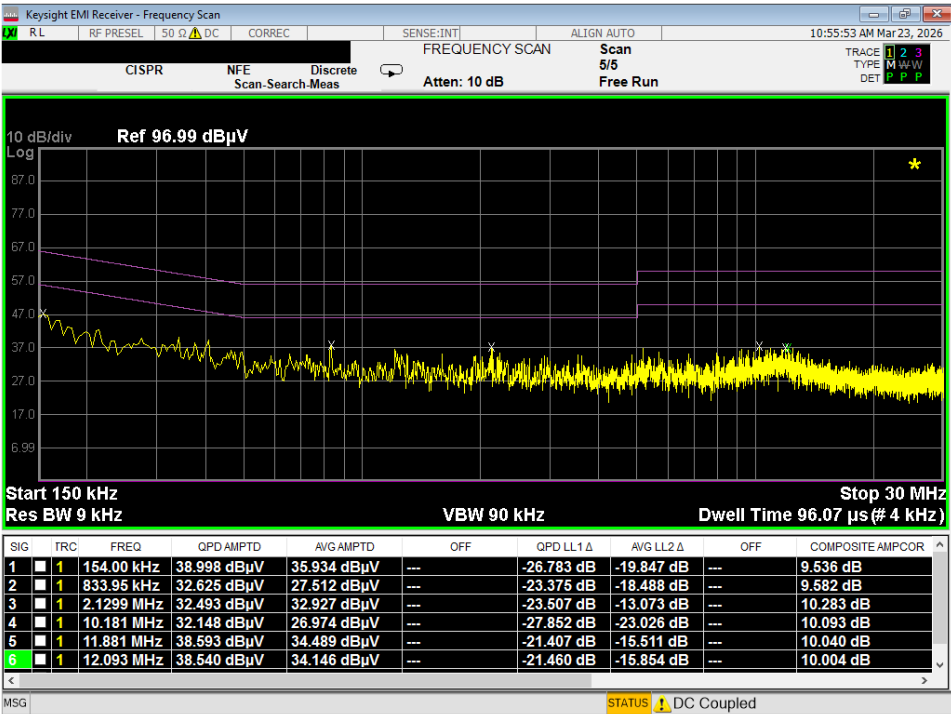


Table 7-33. Line-Conducted Test Data (N)

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 157 of 159

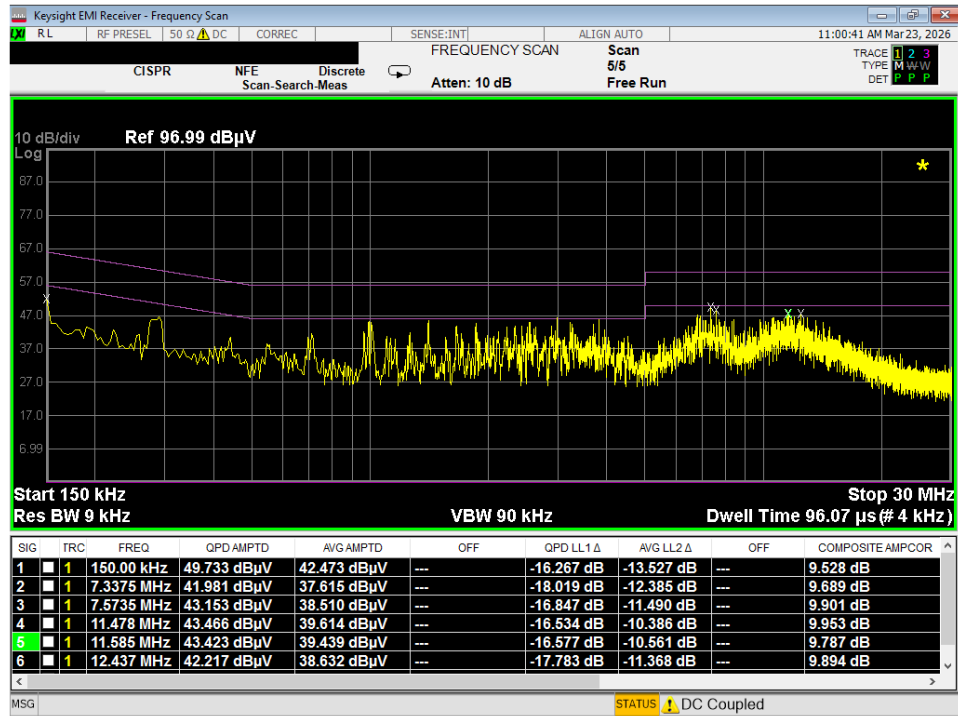

Plot 7-221. Line-Conducted Test Plot (L1) - WCP

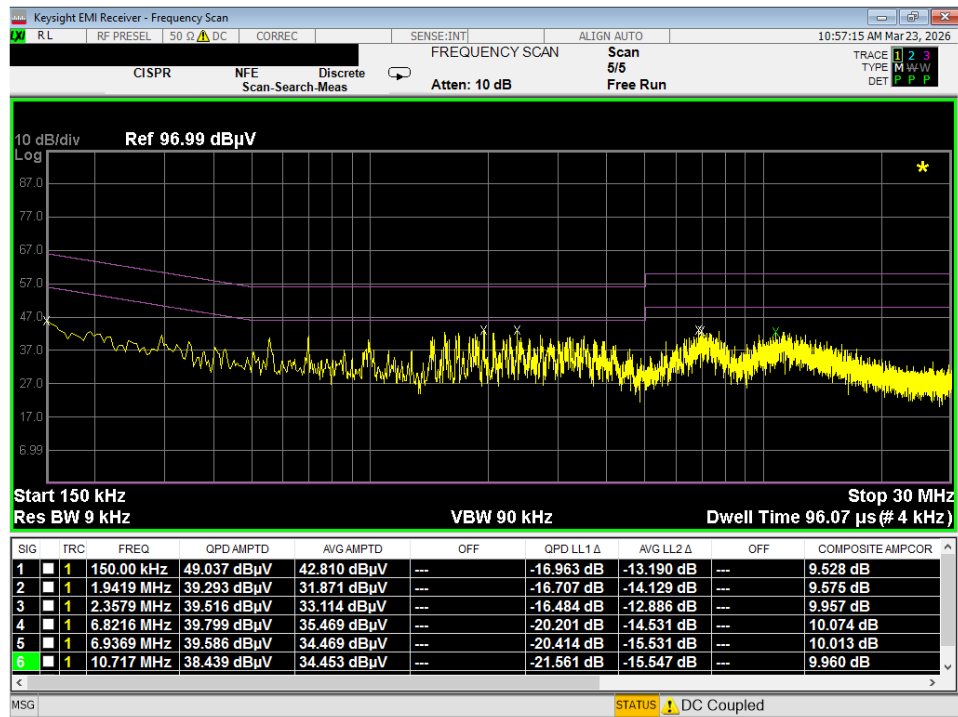


Table 7-34. Line-Conducted Test Data (N) - WCP

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 158 of 159

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF776U** and **IC: 649E-SMF776W** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISED Rules.

- END OF TEST REPORT -

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 159 of 159