

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15 MHz	QPSK	821.50	H	109	303	1.24	1 / 0	19.05	18.14	0.065	38.45	-20.31
	16-QAM	821.50	H	109	303	1.24	1 / 37	18.69	17.78	0.060	38.45	-20.67
10 MHz	QPSK	819.00	H	109	303	1.23	1 / 25	18.99	18.07	0.064	38.45	-20.38
	16-QAM	819.00	H	109	303	1.23	1 / 25	18.61	17.69	0.059	38.45	-20.76
5 MHz	QPSK	816.50	H	109	303	1.21	1 / 12	18.97	18.04	0.064	38.45	-20.41
	QPSK	821.50	H	109	303	1.24	1 / 0	19.01	18.10	0.065	38.45	-20.35
	16-QAM	816.50	H	109	303	1.21	1 / 12	18.72	17.79	0.060	38.45	-20.66
3 MHz	16-QAM	821.50	H	109	303	1.24	1 / 0	18.83	17.92	0.062	38.45	-20.53
	QPSK	815.50	H	109	303	1.21	1 / 0	18.88	17.94	0.062	38.45	-20.51
	QPSK	822.50	H	109	303	1.24	1 / 7	19.04	18.13	0.065	38.45	-20.32
	16-QAM	815.50	H	109	303	1.21	1 / 0	18.62	17.68	0.059	38.45	-20.77
1.4 MHz	16-QAM	822.50	H	109	303	1.24	1 / 7	18.92	18.01	0.063	38.45	-20.44
	QPSK	814.70	H	109	303	1.20	1 / 0	19.04	18.10	0.065	38.45	-20.35
	QPSK	823.30	H	109	303	1.25	1 / 5	18.95	18.05	0.064	38.45	-20.40
	16-QAM	814.70	H	109	303	1.20	1 / 0	18.74	17.80	0.060	38.45	-20.65
	16-QAM	823.30	H	109	303	1.25	1 / 5	18.77	17.87	0.061	38.45	-20.58
15 MHz	QPSK	816.50	V	148	246	1.24	1 / 0	16.96	16.05	0.040	38.45	-22.40
	QPSK (WCP)	821.50	H	113	297	1.24	1 / 0	17.53	16.62	0.046	38.45	-21.83

Table 7-8. ERP Data (LTE Band 26) – Ant1

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	793.00	H	123	295	1.01	1 / 25	18.99	17.85	0.061	34.77	-16.92
	16-QAM	793.00	H	123	295	1.01	1 / 25	17.77	16.63	0.046	34.77	-18.14
5 MHz	QPSK	790.50	H	123	295	1.01	1 / 12	19.01	17.88	0.061	34.77	-16.89
	QPSK	793.00	H	123	295	1.01	1 / 12	19.11	17.97	0.063	34.77	-16.80
	QPSK	795.50	H	123	295	1.00	1 / 0	19.07	17.92	0.062	34.77	-16.85
	16-QAM	793.00	H	123	295	1.01	1 / 12	17.86	16.72	0.047	34.77	-18.05
10 MHz	QPSK	795.50	V	148	246	1.01	1 / 0	16.13	14.99	0.032	34.77	-19.78
	QPSK (WCP)	790.50	H	118	285	1.01	1 / 49	15.55	14.41	0.028	34.77	-20.36

Table 7-9. ERP Data (LTE Band 14) – Ant1

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	$\pi/2$ BPSK	793.00	H	118	285	1.01	1 / 26	19.14	18.00	0.063	34.77	-16.77
	QPSK	793.00	H	118	285	1.01	1 / 26	19.10	17.96	0.062	34.77	-16.81
	16-QAM	793.00	H	118	285	1.01	1 / 26	17.03	15.89	0.039	34.77	-18.88
5 MHz	$\pi/2$ BPSK	790.50	H	118	285	1.01	1 / 1	19.02	17.89	0.061	34.77	-16.88
	$\pi/2$ BPSK	793.00	H	118	285	1.01	1 / 12	19.12	17.98	0.063	34.77	-16.79
	$\pi/2$ BPSK	795.50	H	118	285	1.00	1 / 1	19.15	18.00	0.063	34.77	-16.77
	QPSK	790.50	H	118	285	1.01	1 / 1	19.02	17.89	0.061	34.77	-16.88
	QPSK	793.00	H	118	285	1.01	1 / 12	19.16	18.02	0.063	34.77	-16.75
	QPSK	795.50	H	118	285	1.00	1 / 1	19.12	17.97	0.063	34.77	-16.80
	16-QAM	795.50	H	118	285	1.00	1 / 1	17.34	16.19	0.042	34.77	-18.58
10 MHz	QPSK (CP-OFDM)	793.00	H	119	292	1.01	1 / 26	17.43	16.29	0.043	34.77	-18.48
	QPSK (Opp. Pol.)	793.00	V	152	253	1.01	1 / 26	17.96	16.82	0.048	34.77	-17.95
	QPSK (WCP)	793.00	H	118	285	1.01	1 / 26	15.55	14.41	0.028	34.77	-20.36

Table 7-10. ERP Data (NR Band n14) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 101 of 128

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
20 MHz	$\pi/2$ BPSK	824.00	H	117	297	1.05	1 / 53	17.83	16.73	0.047	38.45	-21.72
	QPSK	824.00	H	117	297	1.05	1 / 104	17.72	16.62	0.046	38.45	-21.83
	16-QAM	824.00	H	117	297	1.05	1 / 53	15.86	14.76	0.030	38.45	-23.69
15 MHz	$\pi/2$ BPSK	821.50	H	117	297	1.04	1 / 77	17.90	16.79	0.048	38.45	-21.66
	QPSK	821.50	H	117	297	1.04	1 / 77	17.63	16.52	0.045	38.45	-21.93
	16-QAM	821.50	H	117	297	1.04	1 / 77	15.70	14.59	0.029	38.45	-23.86
10 MHz	$\pi/2$ BPSK	819.00	H	117	297	1.04	1 / 26	17.73	16.62	0.046	38.45	-21.83
	QPSK	819.00	H	117	297	1.04	1 / 26	17.48	16.37	0.043	38.45	-22.08
	16-QAM	819.00	H	117	297	1.04	1 / 26	15.65	14.54	0.028	38.45	-23.91
5 MHz	$\pi/2$ BPSK	816.50	H	117	297	1.03	1 / 1	17.90	16.78	0.048	38.45	-21.67
	$\pi/2$ BPSK	821.50	H	117	297	1.04	1 / 12	17.89	16.78	0.048	38.45	-21.67
	QPSK	816.50	H	117	297	1.03	1 / 1	17.61	16.49	0.045	38.45	-21.96
	QPSK	821.50	H	117	297	1.04	1 / 12	17.64	16.53	0.045	38.45	-21.92
	16-QAM	816.50	H	117	297	1.03	1 / 1	15.79	14.67	0.029	38.45	-23.78
20 MHz	16-QAM	821.50	H	117	297	1.04	1 / 12	15.70	14.59	0.029	38.45	-23.86
	QPSK (CP-OFDM)	824.00	H	114	298	1.04	1 / 53	16.70	15.59	0.036	38.45	-22.86
	QPSK (Opp. Pol.)	824.00	V	142	240	1.05	1 / 53	17.77	16.67	0.046	38.45	-21.78
	QPSK (WCP)	824.00	H	117	297	1.05	1 / 53	16.15	15.05	0.032	38.45	-23.40

Table 7-11. ERP Data (NR Band n26) – Ant1

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15 MHz	QPSK	821.50	H	110	310	1.04	1 / 74	14.29	13.18	0.021	38.45	-25.27
	16-QAM	821.50	H	110	310	1.04	1 / 74	13.50	12.39	0.017	38.45	-26.06
10 MHz	QPSK	819.00	H	110	310	1.04	1 / 25	14.22	13.10	0.020	38.45	-25.35
	16-QAM	819.00	H	110	310	1.04	1 / 25	13.46	12.34	0.017	38.45	-26.11
5 MHz	QPSK	816.50	H	110	310	1.03	1 / 24	14.27	13.15	0.021	38.45	-25.30
	QPSK	821.50	H	110	310	1.04	1 / 0	14.22	13.11	0.020	38.45	-25.34
	16-QAM	816.50	H	110	310	1.03	1 / 24	13.55	12.43	0.018	38.45	-26.02
3 MHz	16-QAM	821.50	H	110	310	1.04	1 / 0	13.50	12.39	0.017	38.45	-26.06
	QPSK	815.50	H	110	310	1.03	1 / 14	14.24	13.12	0.021	38.45	-25.33
	QPSK	822.50	H	110	310	1.04	1 / 14	14.28	13.17	0.021	38.45	-25.28
	16-QAM	815.50	H	110	310	1.03	1 / 14	13.53	12.41	0.017	38.45	-26.04
	16-QAM	822.50	H	110	310	1.04	1 / 14	13.61	12.50	0.018	38.45	-25.95
1.4 MHz	QPSK	814.70	H	110	310	1.03	1 / 5	14.31	13.18	0.021	38.45	-25.27
	QPSK	823.30	H	110	310	1.05	1 / 5	14.23	13.12	0.021	38.45	-25.33
	16-QAM	814.70	H	110	310	1.03	1 / 5	14.60	13.47	0.022	38.45	-24.98
15 MHz	16-QAM	823.30	H	110	310	1.05	1 / 5	14.46	13.35	0.022	38.45	-25.10
	QPSK	816.50	V	164	334	1.04	1 / 74	12.70	11.59	0.014	38.45	-26.86
	QPSK (WCP)	821.50	H	109	324	1.04	1 / 74	12.13	11.02	0.013	38.45	-27.43

Table 7-12. ERP Data (LTE Band 14) – Ant2

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	793.00	H	117	312	1.01	1 / 0	15.10	13.96	0.025	34.77	-20.81
	16-QAM	793.00	H	117	312	1.01	1 / 0	14.28	13.14	0.021	34.77	-21.63
5 MHz	QPSK	790.50	H	117	312	1.01	1 / 24	15.10	13.97	0.025	34.77	-20.80
	QPSK	793.00	H	117	312	1.01	1 / 24	15.09	13.95	0.025	34.77	-20.82
	QPSK	795.50	H	117	312	1.00	1 / 24	15.08	13.93	0.025	34.77	-20.84
	16-QAM	790.50	H	117	312	1.01	1 / 24	14.30	13.17	0.021	34.77	-21.60
10 MHz	QPSK	795.50	V	166	359	1.01	1 / 0	12.52	11.38	0.014	34.77	-23.39
	QPSK (WCP)	790.50	H	117	312	1.01	1 / 0	12.58	11.44	0.014	34.77	-23.33

Table 7-13. ERP Data (LTE Band 14) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 102 of 128

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	$\pi/2$ BPSK	793.00	H	117	308	1.01	1 / 26	14.19	13.05	0.020	34.77	-21.72
	QPSK	793.00	H	117	308	1.01	1 / 1	14.28	13.14	0.021	34.77	-21.63
	16-QAM	793.00	H	117	308	1.01	1 / 1	12.20	11.06	0.013	34.77	-23.71
5 MHz	$\pi/2$ BPSK	790.50	H	117	308	1.01	1 / 12	14.09	12.96	0.020	34.77	-21.81
	$\pi/2$ BPSK	793.00	H	117	308	1.01	1 / 12	14.12	12.98	0.020	34.77	-21.79
	$\pi/2$ BPSK	795.50	H	117	308	1.00	1 / 12	14.15	13.00	0.020	34.77	-21.77
	QPSK	790.50	H	117	308	1.01	1 / 12	14.20	13.07	0.020	34.77	-21.70
	QPSK	793.00	H	117	308	1.01	1 / 12	14.23	13.09	0.020	34.77	-21.68
	QPSK	795.50	H	117	308	1.00	1 / 12	14.26	13.11	0.020	34.77	-21.66
	16-QAM	795.50	H	117	308	1.00	1 / 12	12.40	11.25	0.013	34.77	-23.52
10 MHz	QPSK (CP-OFDM)	793.00	H	112	320	1.01	1 / 1	12.78	11.64	0.015	34.77	-23.13
	QPSK (Opp. Pol.)	793.00	V	162	346	1.01	1 / 1	11.86	10.72	0.012	34.77	-24.05
	QPSK (WCP)	793.00	H	117	304	1.01	1 / 1	11.99	10.85	0.012	34.77	-23.92

Table 7-14. ERP Data (NR Band n14) – Ant2

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
20 MHz	$\pi/2$ BPSK	824.00	H	109	311	1.05	1 / 104	15.62	14.52	0.028	38.45	-23.93
	QPSK	824.00	H	109	311	1.05	1 / 104	15.64	14.54	0.028	38.45	-23.91
	16-QAM	824.00	H	109	311	1.05	1 / 104	13.66	12.56	0.018	38.45	-25.89
15 MHz	$\pi/2$ BPSK	821.50	H	109	311	1.04	1 / 77	15.57	14.46	0.028	38.45	-23.99
	QPSK	821.50	H	109	311	1.04	1 / 77	15.63	14.52	0.028	38.45	-23.93
	16-QAM	821.50	H	109	311	1.04	1 / 77	12.57	11.46	0.014	38.45	-26.99
10 MHz	$\pi/2$ BPSK	819.00	H	109	311	1.04	1 / 50	15.59	14.48	0.028	38.45	-23.97
	QPSK	819.00	H	109	311	1.04	1 / 50	15.57	14.46	0.028	38.45	-23.99
	16-QAM	819.00	H	109	311	1.04	1 / 50	12.65	11.54	0.014	38.45	-26.91
5 MHz	$\pi/2$ BPSK	816.50	H	109	311	1.03	1 / 23	15.63	14.51	0.028	38.45	-23.94
	$\pi/2$ BPSK	821.50	H	109	311	1.04	1 / 23	15.53	14.42	0.028	38.45	-24.03
	QPSK	816.50	H	109	311	1.03	1 / 23	15.72	14.60	0.029	38.45	-23.85
	QPSK	821.50	H	109	311	1.04	1 / 23	15.59	14.48	0.028	38.45	-23.97
	16-QAM	816.50	H	109	311	1.03	1 / 23	13.75	12.63	0.018	38.45	-25.82
20 MHz	16-QAM	821.50	H	109	311	1.04	1 / 23	13.65	12.54	0.018	38.45	-25.91
	QPSK (CP-OFDM)	824.00	H	111	312	1.05	1 / 104	14.00	12.90	0.019	38.45	-25.55
	QPSK (Opp. Pol.)	824.00	V	162	346	1.05	1 / 104	12.69	11.59	0.014	38.45	-26.86
	QPSK (WCP)	824.00	H	109	321	1.05	1 / 104	14.36	13.26	0.021	38.45	-25.19

Table 7-15. ERP Data (NR Band n26) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 103 of 128

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26:2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26:2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 104 of 128

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

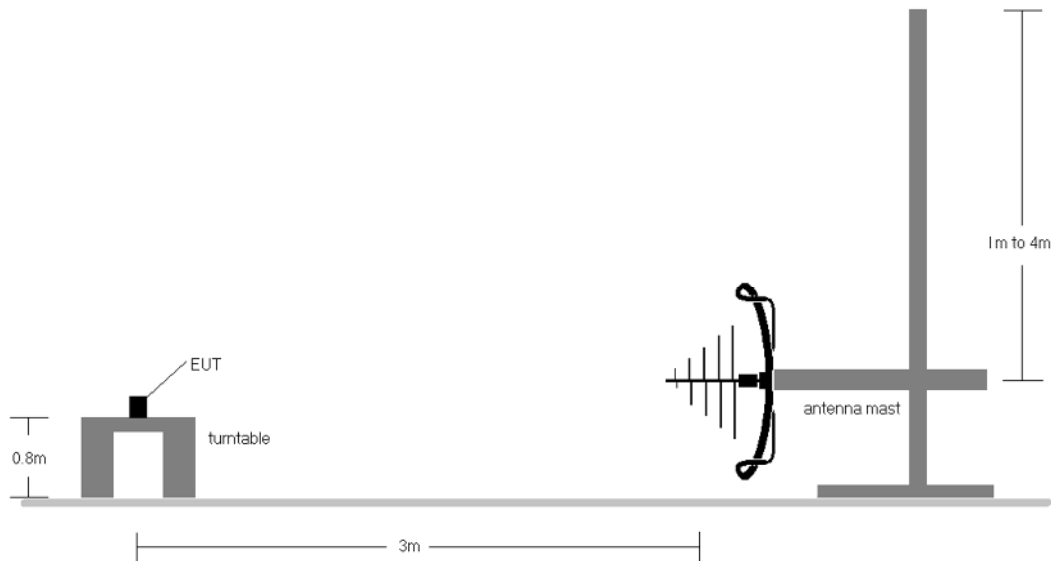


Figure 7-7. Test Instrument & Measurement Setup < 1GHz

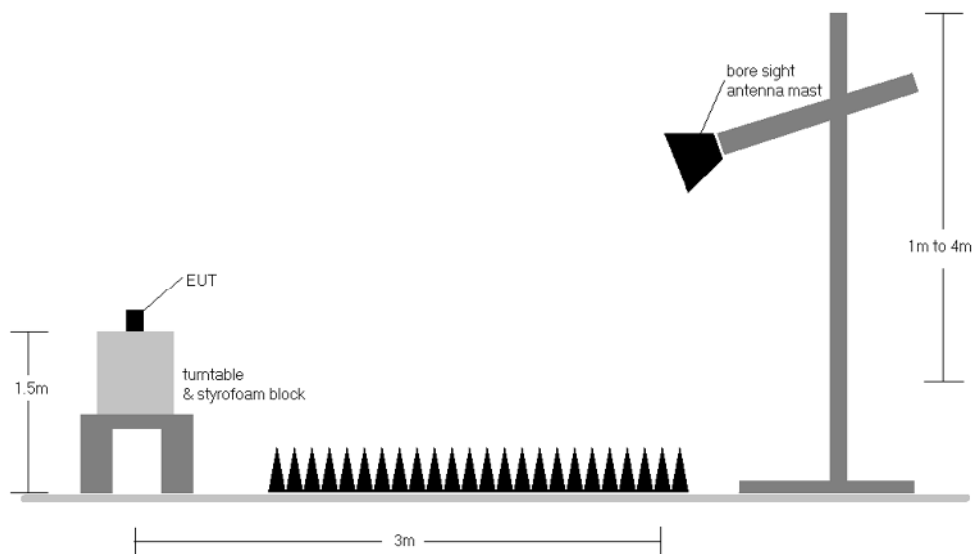


Figure 7-8. Test Instrument & Measurement Setup >1 GHz


FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 105 of 128

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26:2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 7) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.
- 8) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device are subject to the rules under which the NR carrier operates. Spurious emissions caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 106 of 128

LTE Band 26 – Ant1

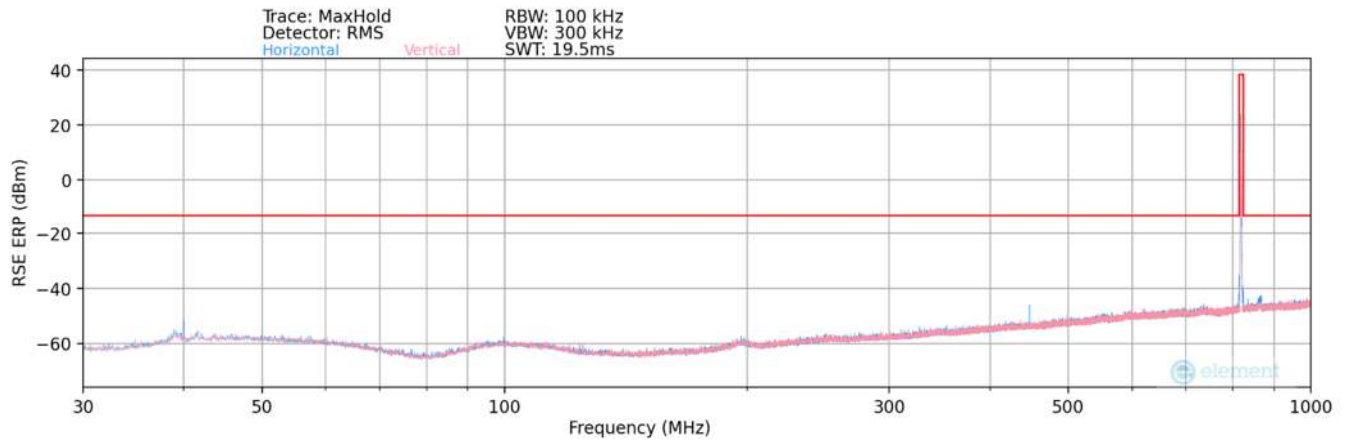

Plot 7-131. Radiated Spurious Plot (LTE Band 26) – Ant1

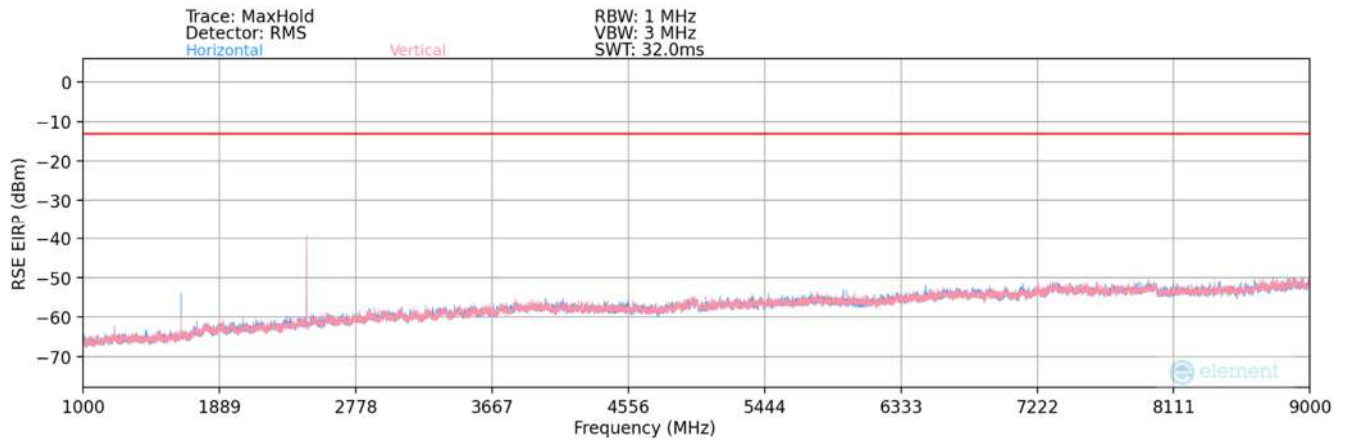

Plot 7-132. Radiated Spurious Plot (LTE Band 26) – Ant1

Bandwidth (MHz):	15
Frequency (MHz):	821.5
RB Config (Size / Offset):	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
994.65	H	-	-	-82.39	31.19	55.80	-41.61	-13.00	-28.61

Table 7-16. Radiated Spurious Data (LTE Band 26) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 107 of 128


Bandwidth (MHz):	15
Frequency (MHz):	821.5
RB Config (Size / Offset):	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1643.00	H	139	238	-71.25	-9.11	26.64	-68.62	-13.00	-55.62
2464.50	H	142	244	-66.37	-5.74	34.89	-60.37	-13.00	-47.37
3286.00	H	-	-	-73.32	-2.66	31.02	-64.24	-13.00	-51.24
4107.50	H	-	-	-75.63	0.12	31.49	-63.76	-13.00	-50.76
4929.00	H	-	-	-75.22	1.12	32.90	-62.36	-13.00	-49.36


Table 7-17. Radiated Spurious Data (LTE Band 26 – Mid Channel) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 108 of 128

LTE Band 14 – Ant1

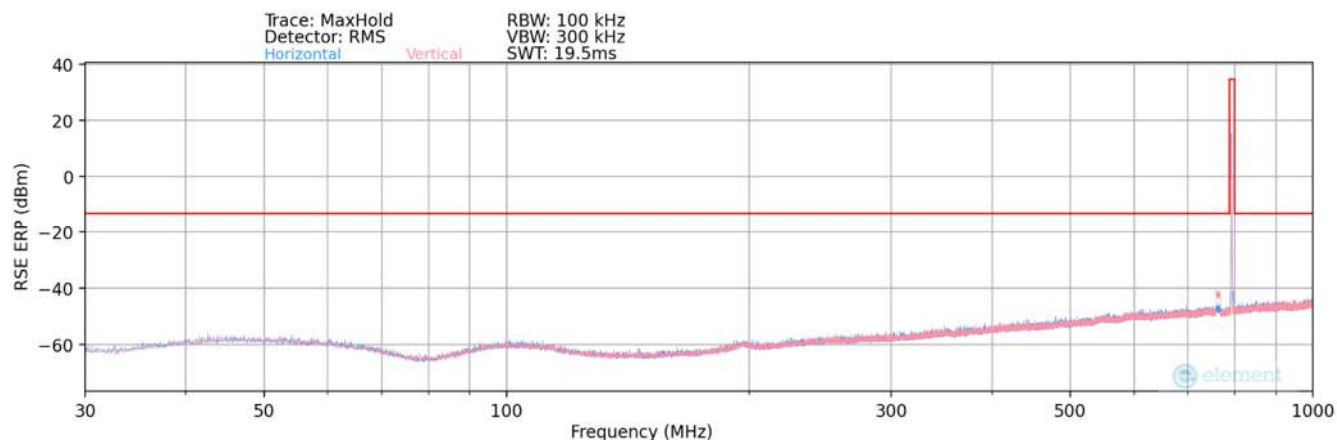

Plot 7-133. Radiated Spurious Plot (LTE Band 14) – Ant1

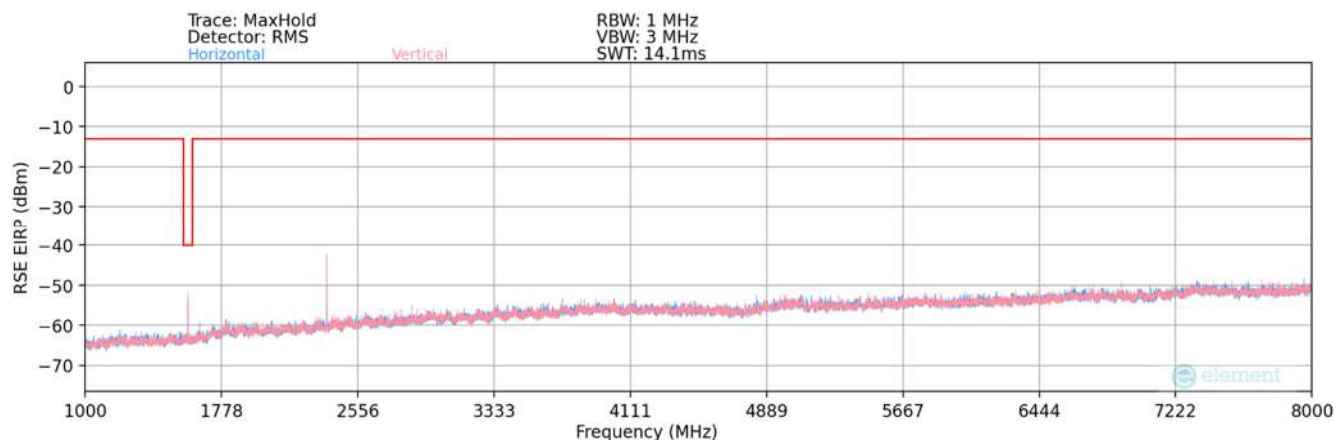

Plot 7-134. Radiated Spurious Plot (LTE Band 14) – Ant1

Bandwidth (MHz):	10
Frequency (MHz):	793
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
598.89	H	-	-	-86.10	26.82	47.72	-49.69	-13.00	-36.69
695.89	H	-	-	-87.05	28.24	48.19	-49.21	-13.00	-36.21
889.80	H	-	-	-87.15	30.61	50.46	-46.94	-13.00	-33.94

Table 7-18. Radiated Spurious Data (LTE Band 14) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 109 of 128


Bandwidth (MHz):	10
Frequency (MHz):	793
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.00	H	129	353	-63.88	-8.04	35.08	-60.18	-40.00	-20.18
2379.00	H	128	304	-53.41	-4.38	49.21	-46.05	-13.00	-33.05
3172.00	H	-	-	-75.22	-1.64	30.14	-65.12	-13.00	-52.12
3965.00	H	-	-	-76.35	1.34	31.99	-63.27	-13.00	-50.27
4758.00	H	-	-	-76.54	0.82	31.28	-63.98	-13.00	-50.98
5551.00	H	-	-	-76.98	2.93	32.95	-62.31	-13.00	-49.31


Table 7-19. Radiated Spurious Data (LTE Band 14 – Mid Channel) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 110 of 128

NR Band n26 – Ant1

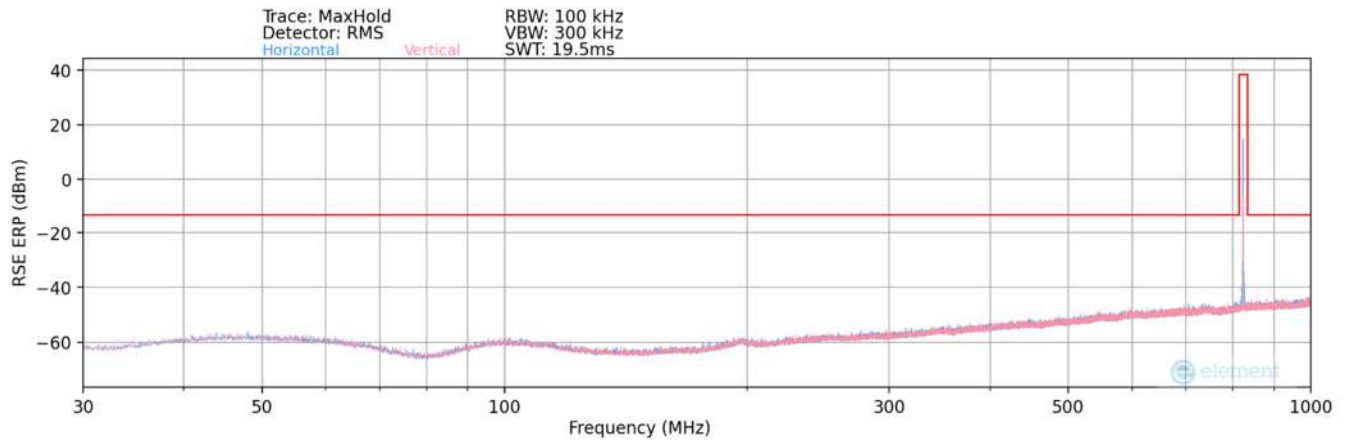

Plot 7-135. Radiated Spurious Plot (NR Band n26) – Ant1

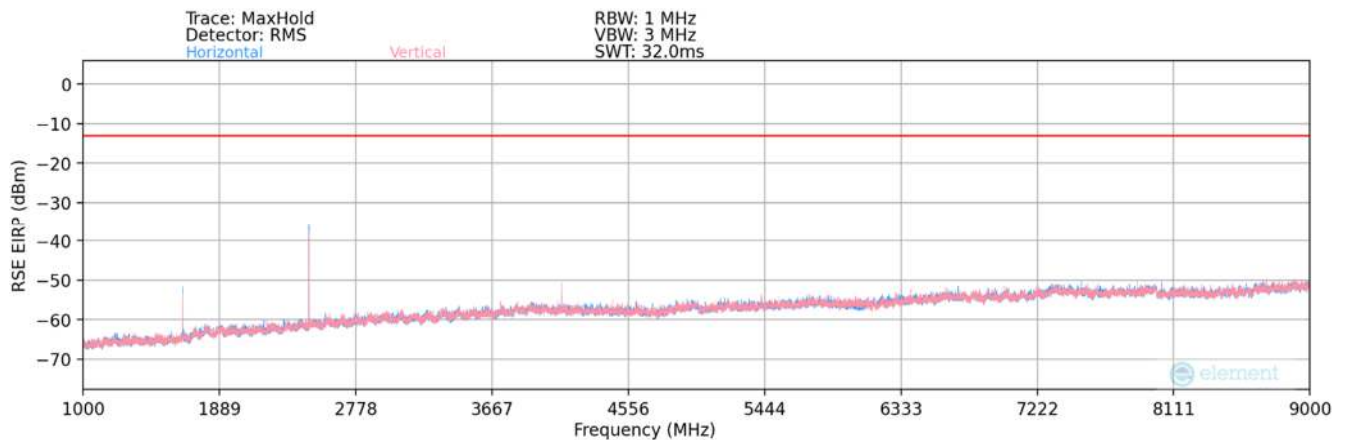

Plot 7-136. Radiated Spurious Plot (NR Band n26) – Ant1

Bandwidth (MHz):	20
Frequency (MHz):	824
RB / Offset:	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
515.00	H	-	-	-86.35	25.00	45.65	-51.76	-13.00	-38.76
708.00	H	-	-	-87.63	28.10	47.47	-49.94	-13.00	-36.94
921.02	H	-	-	-87.13	30.93	50.80	-46.61	-13.00	-33.61

Table 7-20. Radiated Spurious Data (NR Band n26) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 111 of 128


Bandwidth (MHz):	20
Frequency (MHz):	824
RB / Offset:	1 / 80

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.00	H	137	343	-70.20	-7.67	29.13	-66.13	-13.00	-53.13
2472.00	H	138	317	-55.65	-3.99	47.36	-47.90	-13.00	-34.90
3296.00	H	-	-	-76.50	-1.00	29.50	-65.75	-13.00	-52.75
4120.00	H	-	-	-75.83	1.09	32.26	-63.00	-13.00	-50.00
4944.00	H	-	-	-76.53	1.98	32.45	-62.81	-13.00	-49.81
5768.00	H	-	-	-77.35	4.03	33.68	-61.58	-13.00	-48.58


Table 7-21. Radiated Spurious Data (NR Band n26) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 112 of 128

NR Band n14 – Ant1

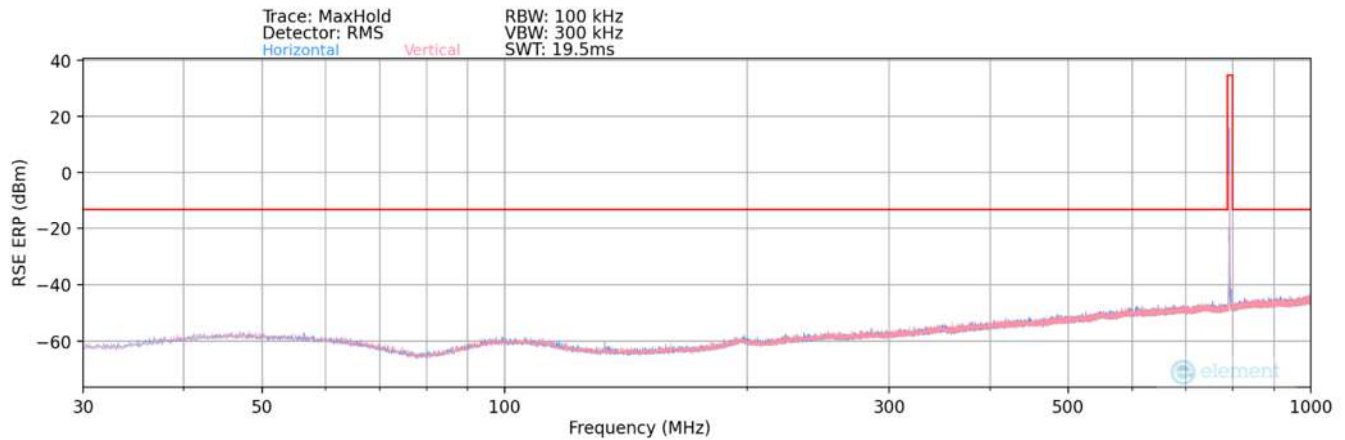

Plot 7-137. Radiated Spurious Plot (NR Band n14) – Ant1

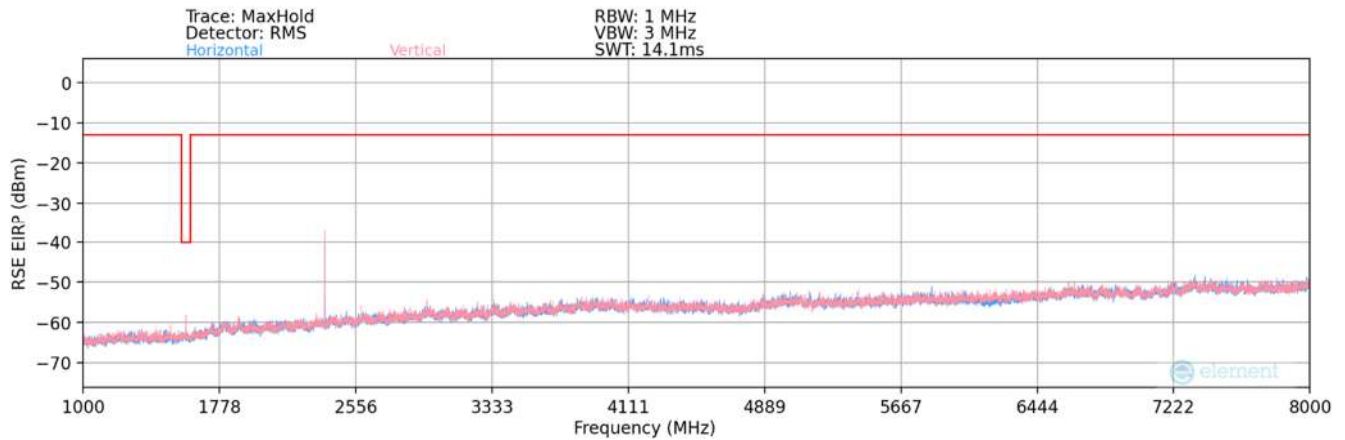

Plot 7-138. Radiated Spurious Plot (NR Band n14) – Ant1

Bandwidth (MHz):	10
Frequency (MHz):	793
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
515.00	H	-	-	-87.44	25.00	44.56	-52.85	-13.00	-39.85
708.10	H	-	-	-86.82	28.10	48.28	-49.13	-13.00	-36.13
986.97	H	-	-	-87.56	31.40	50.84	-46.56	-13.00	-33.56

Table 7-22. Radiated Spurious Data (NR Band n14) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 113 of 128


Bandwidth (MHz):	10
Frequency (MHz):	793
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.00	H	111	360	-73.81	-8.04	25.15	-70.11	-40.00	-30.11
2379.00	H	144	304	-53.52	-4.38	49.10	-46.16	-13.00	-33.16
3172.00	H	-	-	-75.02	-1.64	30.34	-64.92	-13.00	-51.92
3965.00	H	-	-	-76.26	1.34	32.08	-63.18	-13.00	-50.18
4758.00	H	-	-	-76.34	0.82	31.48	-63.78	-13.00	-50.78
5551.00	H	-	-	-76.85	2.93	33.08	-62.18	-13.00	-49.18


Table 7-23. Radiated Spurious Data (NR Band n14) – Ant1

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 114 of 128

LTE Band 26 – Ant2

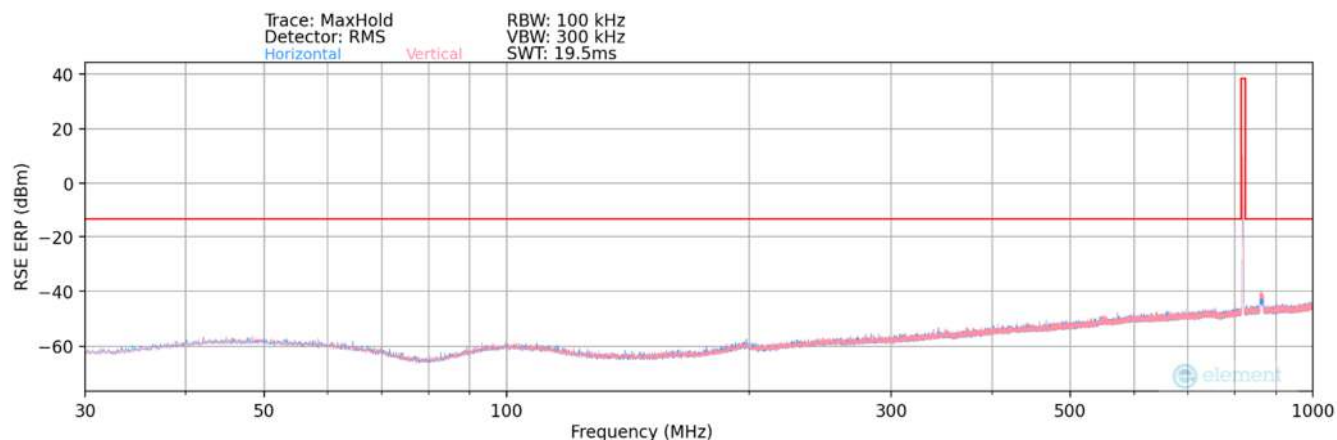

Plot 7-139. Radiated Spurious Plot (LTE Band 26) – Ant2

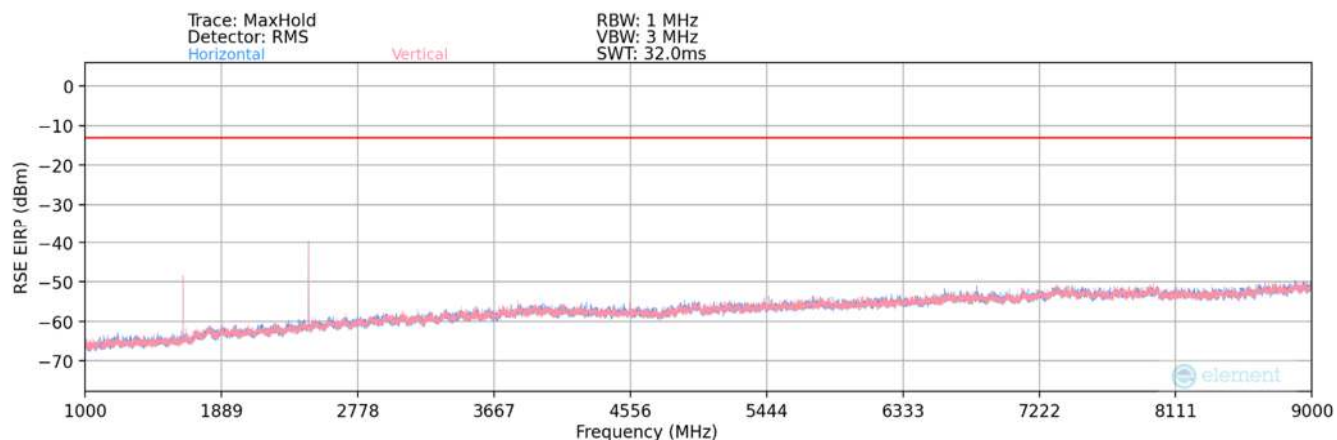

Plot 7-140. Radiated Spurious Plot (LTE Band 26) – Ant2

Bandwidth (MHz):	10
Frequency (MHz):	819
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
430.90	V	-	-	-87.90	23.61	42.71	-54.70	-13.00	-41.70
721.90	V	-	-	-87.48	28.38	47.90	-49.51	-13.00	-36.51
915.80	V	-	-	-88.26	31.01	49.75	-47.66	-13.00	-34.66

Table 7-24. Radiated Spurious Data (LTE Band 26) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 115 of 128


Bandwidth (MHz):	10
Frequency (MHz):	819
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1638.00	V	163	172	-65.23	-7.82	33.95	-61.31	-13.00	-48.31
2457.00	V	157	158	-63.25	-4.07	39.68	-55.58	-13.00	-42.58
3276.00	V	-	-	-75.88	-0.97	30.15	-65.11	-13.00	-52.11
4095.00	V	-	-	-76.08	1.34	32.26	-63.00	-13.00	-50.00
4914.00	V	-	-	-76.89	2.50	32.61	-62.65	-13.00	-49.65
5733.00	V	-	-	-77.12	4.01	33.89	-61.37	-13.00	-48.37


Table 7-25. Radiated Spurious Data (LTE Band 26 – Mid Channel) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 116 of 128

LTE Band 14 – Ant2

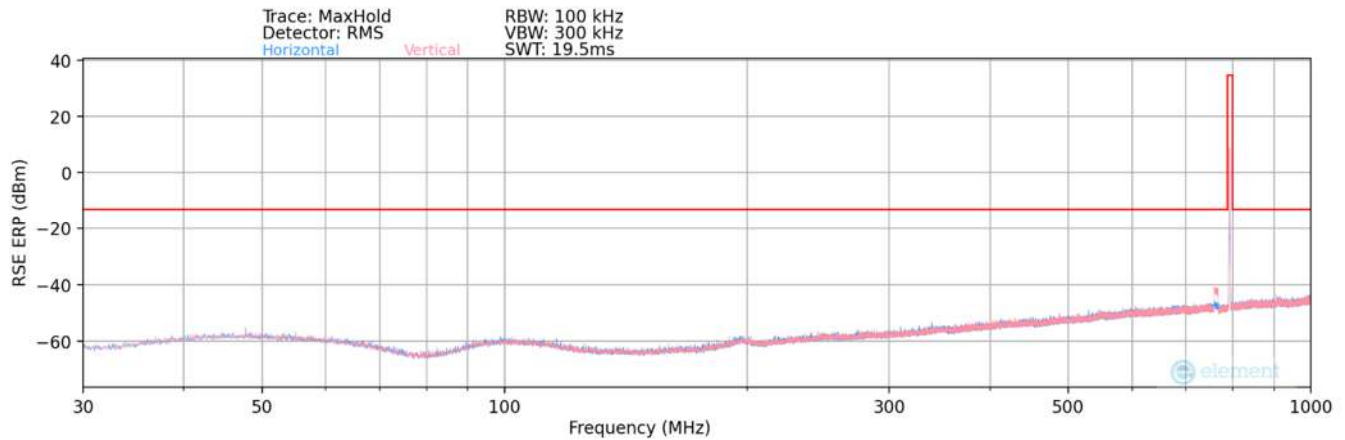

Plot 7-141. Radiated Spurious Plot (LTE Band 14) – Ant2

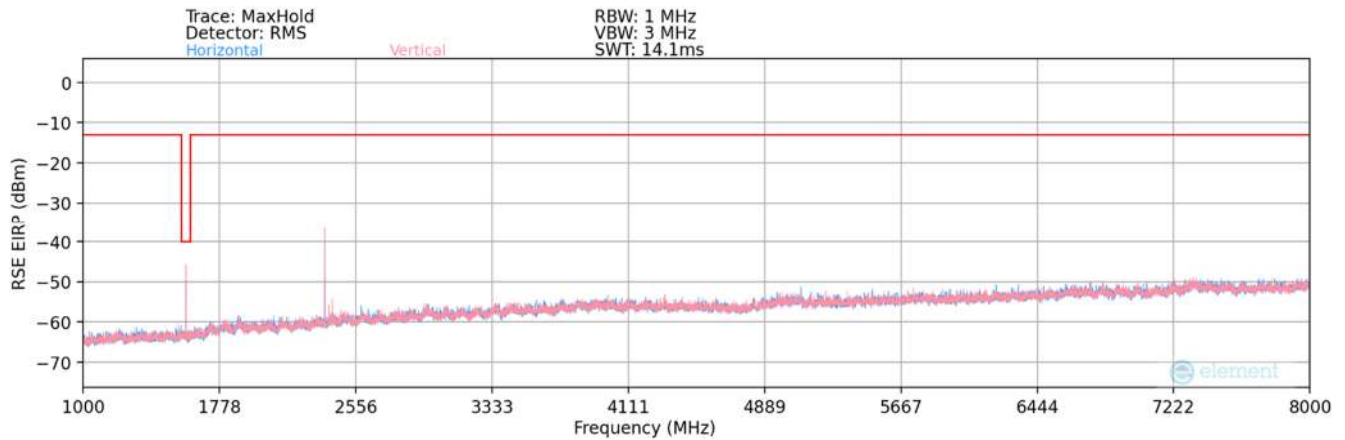

Plot 7-142. Radiated Spurious Plot (LTE Band 14) – Ant2

Bandwidth (MHz):	10
Frequency (MHz):	793
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
576.62	V	-	-	-86.67	25.96	46.29	-51.12	-13.00	-38.12
770.60	V	-	-	-86.68	28.83	49.15	-48.26	-13.00	-35.26
964.60	V	-	-	-87.20	30.99	50.79	-46.62	-13.00	-33.62

Table 7-26. Radiated Spurious Data (LTE Band 14) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 117 of 128


Bandwidth (MHz):	10
Frequency (MHz):	793
RB Config (Size / Offset):	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.00	V	173	181	-57.88	-8.04	41.08	-54.18	-40.00	-14.18
2379.00	V	181	173	-49.02	-4.38	53.60	-41.66	-13.00	-28.66
3172.00	V	-	-	-74.98	-1.64	30.38	-64.88	-13.00	-51.88
3965.00	V	190	210	-74.78	1.34	33.56	-61.70	-13.00	-48.70
4758.00	V	-	-	-76.45	0.82	31.37	-63.89	-13.00	-50.89
5551.00	V	-	-	-76.85	2.93	33.08	-62.18	-13.00	-49.18


Table 7-27. Radiated Spurious Data (LTE Band 14 – Mid Channel) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 118 of 128

NR Band n26 – Ant2

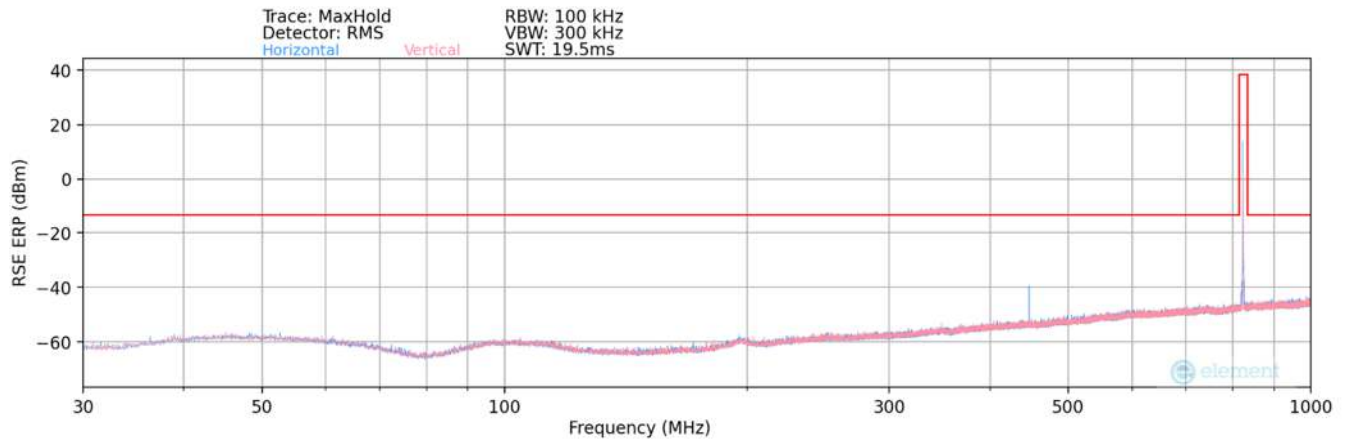

Plot 7-143. Radiated Spurious Plot (NR Band n26) – Ant2

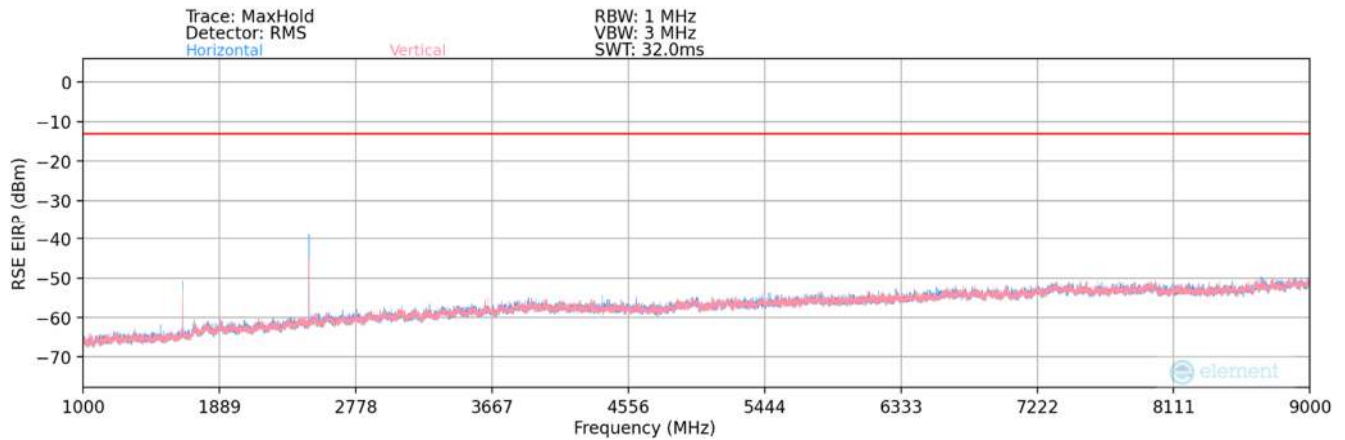

Plot 7-144. Radiated Spurious Plot (NR Band n26) – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	824
RB / Offset:	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
502.40	V	-	-	-86.98	24.89	44.91	-52.50	-13.00	-39.50
705.12	V	-	-	-86.67	28.10	48.43	-48.98	-13.00	-35.98
962.50	V	-	-	-88.20	30.99	49.79	-47.62	-13.00	-34.62

Table 7-28. Radiated Spurious Data (NR Band n26) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 119 of 128


Bandwidth (MHz):	20
Frequency (MHz):	824
RB / Offset:	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.00	V	146	212	-66.65	-7.67	32.68	-62.58	-13.00	-49.58
2472.00	V	157	168	-58.35	-3.99	44.66	-50.60	-13.00	-37.60
3296.00	V	-	-	-76.42	-1.00	29.59	-65.67	-13.00	-52.67
4120.00	V	-	-	-75.85	1.09	32.24	-63.02	-13.00	-50.02
4944.00	V	-	-	-76.46	1.98	32.52	-62.74	-13.00	-49.74
5768.00	V	-	-	-77.38	4.03	33.65	-61.61	-13.00	-48.61


Table 7-29. Radiated Spurious Data (NR Band n26) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 120 of 128

NR Band n14 – Ant2

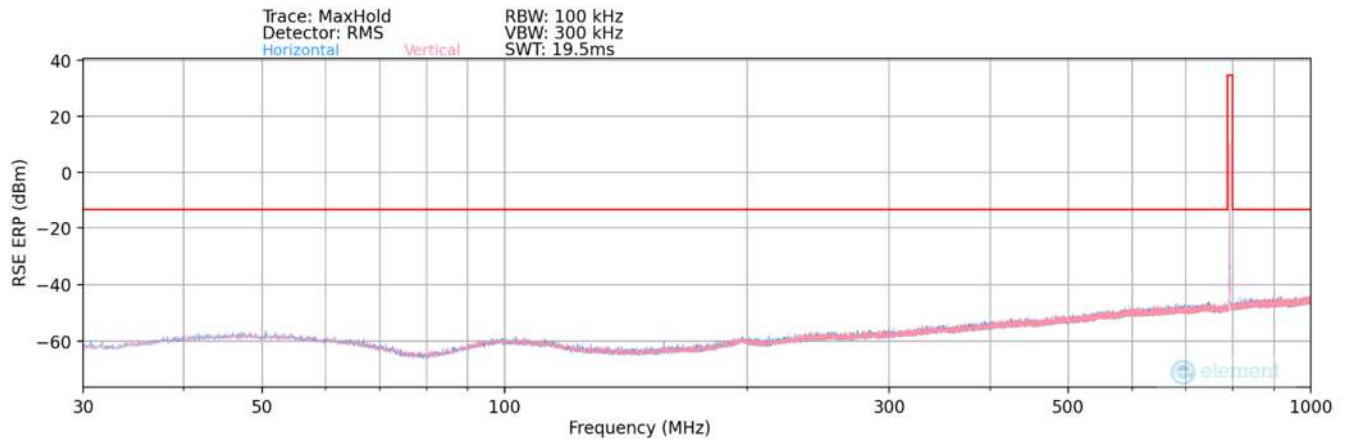

Plot 7-145. Radiated Spurious Plot (NR Band n14) – Ant2

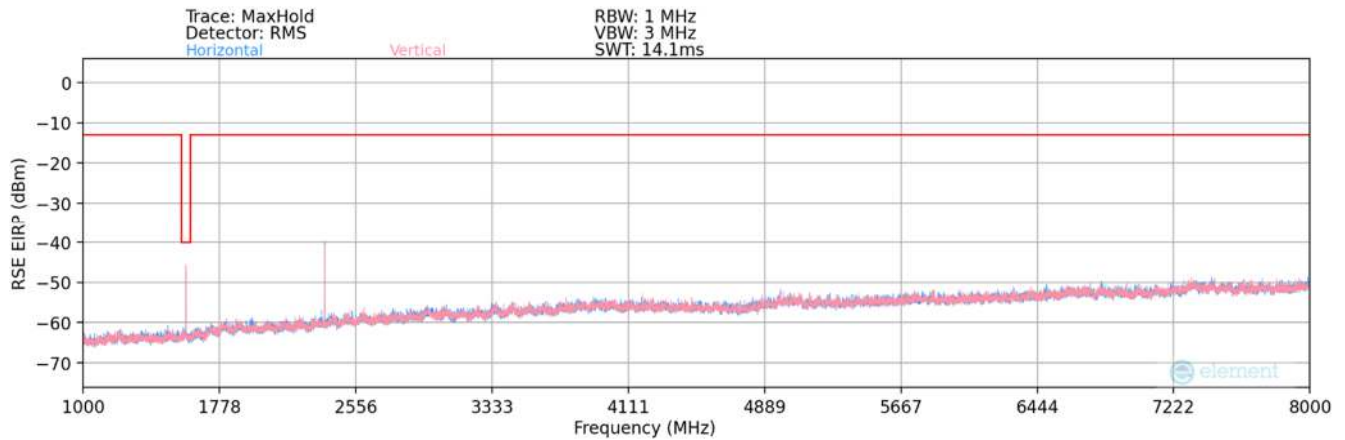

Plot 7-146. Radiated Spurious Plot (NR Band n14) – Ant2

Bandwidth (MHz):	10
Frequency (MHz):	793
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
514.20	V	-	-	-88.12	24.98	43.86	-53.54	-13.00	-40.54
708.00	V	-	-	-86.98	28.10	48.12	-49.29	-13.00	-36.29
956.60	V	-	-	-87.93	30.97	50.04	-47.36	-13.00	-34.36

Table 7-30. Radiated Spurious Data (NR Band n14) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 121 of 128

Bandwidth (MHz):	10
Frequency (MHz):	793
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1586.00	V	146	200	-56.12	-8.04	42.84	-52.42	-40.00	-12.42
2379.00	V	143	167	-52.90	-4.38	49.72	-45.54	-13.00	-32.54
3172.00	V	-	-	-74.65	-1.64	30.71	-64.55	-13.00	-51.55
3965.00	V	-	-	-76.12	1.34	32.22	-63.04	-13.00	-50.04
4758.00	V	-	-	-76.70	0.82	31.12	-64.14	-13.00	-51.14
5551.00	V	-	-	-76.98	2.93	32.95	-62.31	-13.00	-49.31

Table 7-31. Radiated Spurious Data (NR Band n14) – Ant2

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 122 of 128

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26:2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI C63.26:2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None


FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 123 of 128

LTE Band 26

Operating Frequency (Hz):	819,000,000
Ref. Voltage (VDC):	4.521
Deviation Limit:	$\pm 0.00025\%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	819,000,375	-981	-0.0001198
		- 20	819,001,739	383	0.0000468
		- 10	819,000,457	-899	-0.0001098
		0	819,000,336	-1,020	-0.0001245
		+ 10	819,000,224	-1,132	-0.0001382
		+ 20 (Ref)	819,001,356	0	0.0000000
		+ 30	819,000,675	-681	-0.0000832
		+ 40	819,001,074	-282	-0.0000344
		+ 50	819,001,272	-84	-0.0000103
Battery Endpoint	3.398	+ 20	819,000,746	-610	-0.0000745

Table 7-32. LTE Band 26 Frequency Stability Data

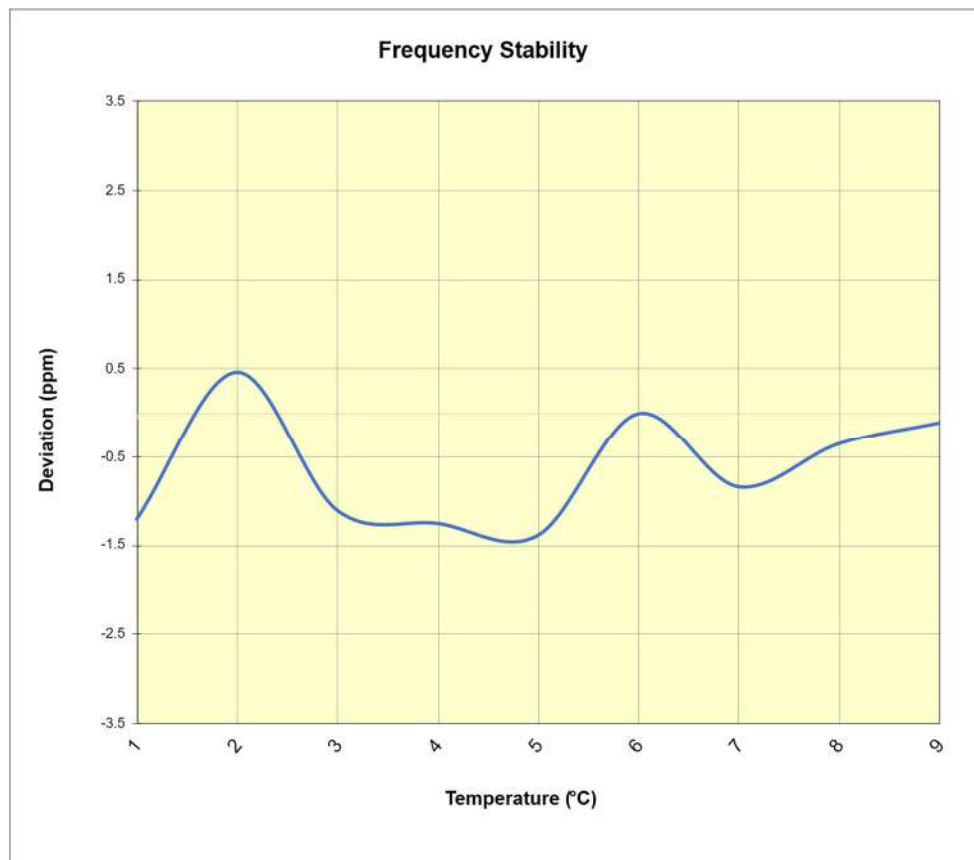

Plot 7-147. LTE Band 26 Frequency Stability Chart


FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 124 of 128

LTE Band 14

Operating Frequency (Hz):	793,000,000
Ref. Voltage (VDC):	4.521

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	793,001,478	895	0.0001129
		- 20	793,000,247	-336	-0.0000424
		- 10	793,001,023	440	0.0000555
		0	793,000,551	-32	-0.0000040
		+ 10	793,001,032	449	0.0000566
		+ 20 (Ref)	793,000,583	0	0.0000000
		+ 30	793,001,275	692	0.0000873
		+ 40	793,000,756	173	0.0000218
		+ 50	793,000,114	-469	-0.0000591
Battery Endpoint	3.398	+ 20	793,000,646	63	0.0000079

Table 7-33. LTE Band 14 Frequency Stability Data

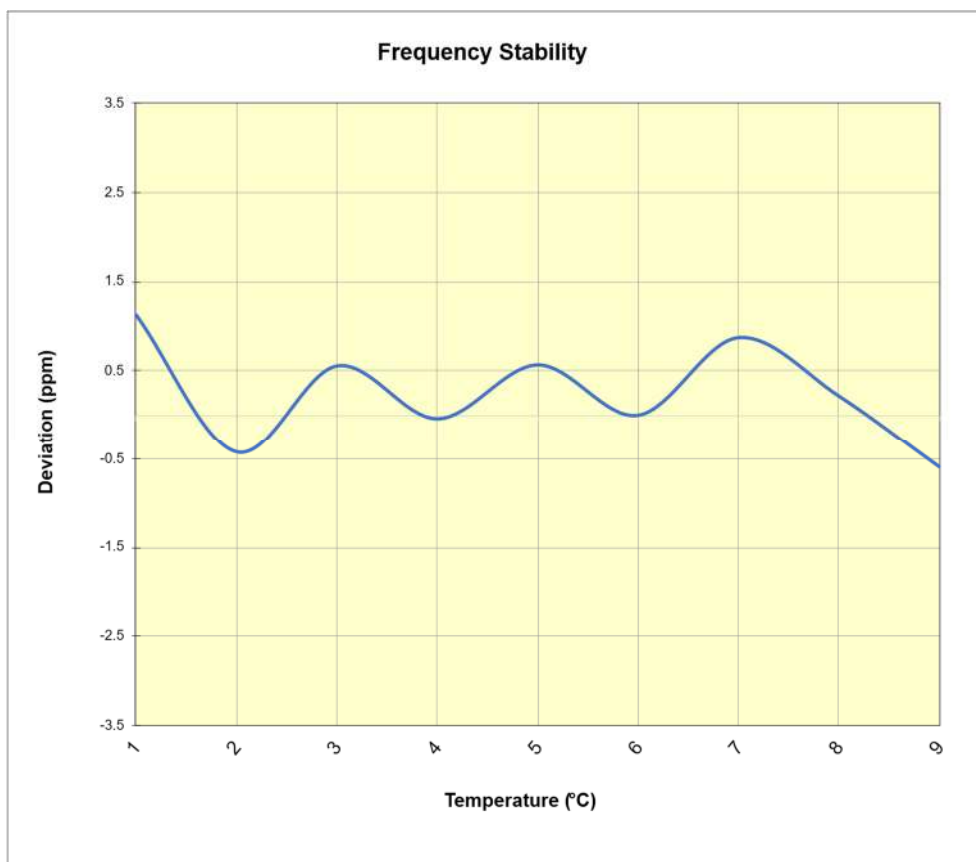

Plot 7-148. LTE Band 14 Frequency Stability Chart


FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 125 of 128

NR Band n26

Operating Frequency (Hz):	819,000,000
Ref. Voltage (VDC):	4.521
Deviation Limit:	$\pm 0.00025\%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.521	- 30	819,001,856	218	0.0000266
		- 20	819,002,473	835	0.0001020
		- 10	819,000,211	-1,427	-0.0001742
		0	819,001,573	-65	-0.0000079
		+ 10	819,000,104	-1,534	-0.0001873
		+ 20 (Ref)	819,001,638	0	0.0000000
		+ 30	819,000,594	-1,044	-0.0001275
		+ 40	819,001,133	-505	-0.0000617
		+ 50	819,000,841	-797	-0.0000973
Battery Endpoint	3.398	+ 20	819,001,125	-513	-0.0000626

Table 7-34. NR Band n26 Frequency Stability Data

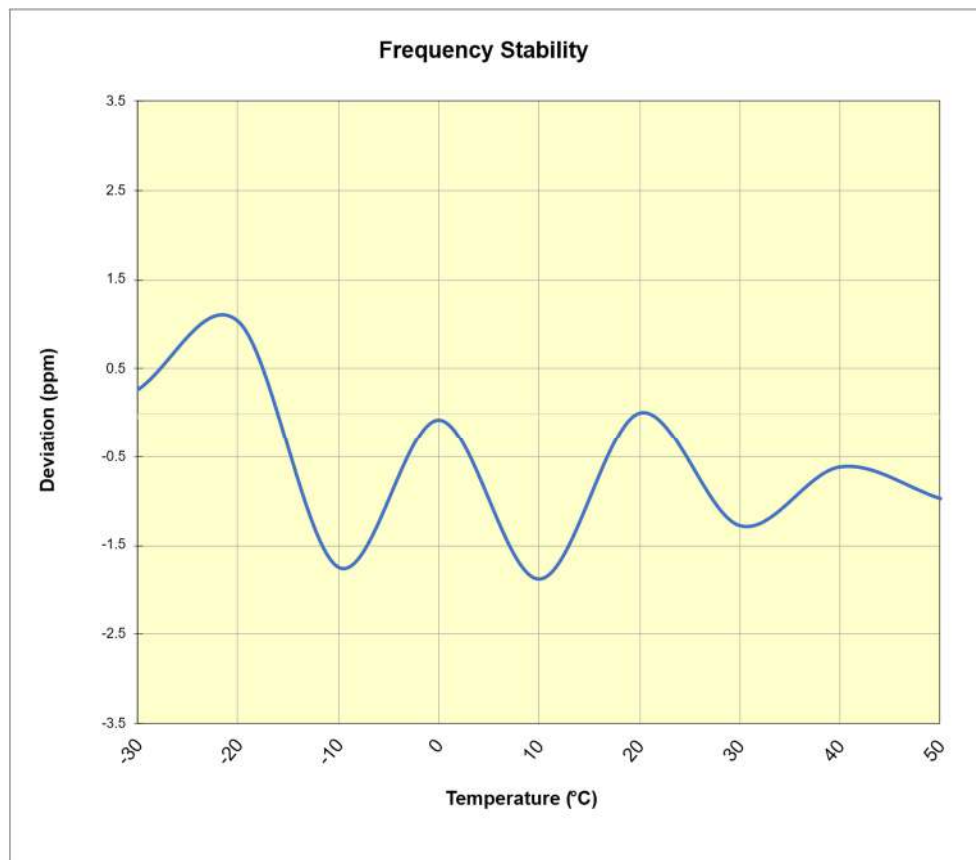


Plot 7-149. NR Band n26 Frequency Stability Chart

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 126 of 128

NR Band n14

<table><tr><td>Operating Frequency (Hz):</td><td>793,000,000</td></tr><tr><td>Ref. Voltage (VDC):</td><td>4.521</td></tr></table>						Operating Frequency (Hz):	793,000,000	Ref. Voltage (VDC):	4.521
Operating Frequency (Hz):	793,000,000								
Ref. Voltage (VDC):	4.521								
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)				
100 %	4.521	- 30	793,001,824	887	0.0001119				
		- 20	793,000,127	-810	-0.0001021				
		- 10	793,001,017	80	0.0000101				
		0	793,000,649	-288	-0.0000363				
		+ 10	793,001,022	85	0.0000107				
		+ 20 (Ref)	793,000,937	0	0.0000000				
		+ 30	793,001,142	205	0.0000259				
		+ 40	793,000,627	-310	-0.0000391				
		+ 50	793,000,533	-404	-0.0000509				
Battery Endpoint	3.398	+ 20	793,001,682	745	0.0000939				

Table 7-35. NR Band n14 Frequency Stability Data

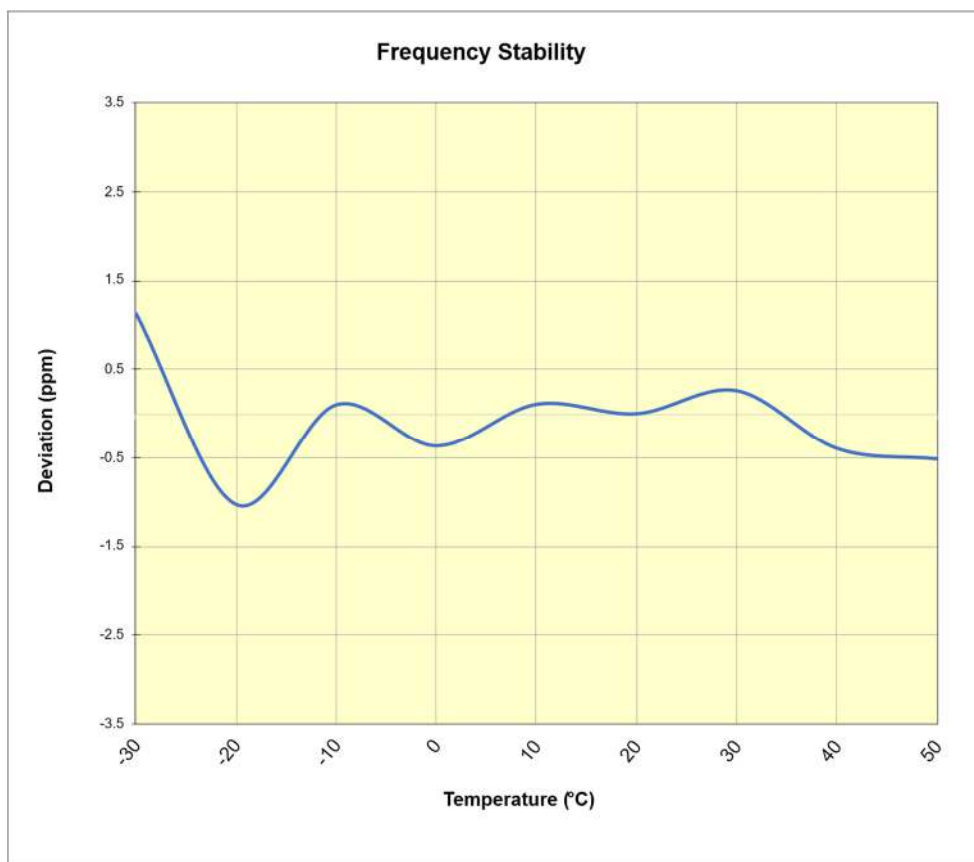

Plot 7-150. NR Band n14 Frequency Stability Chart

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 127 of 128

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samusng Portable Handset** **FCC ID: A3LSMF776U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

- END OF TEST REPORT -

FCC ID: A3LSMF776U	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/20/2026 – 4/21/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-08-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 128 of 128