




7.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

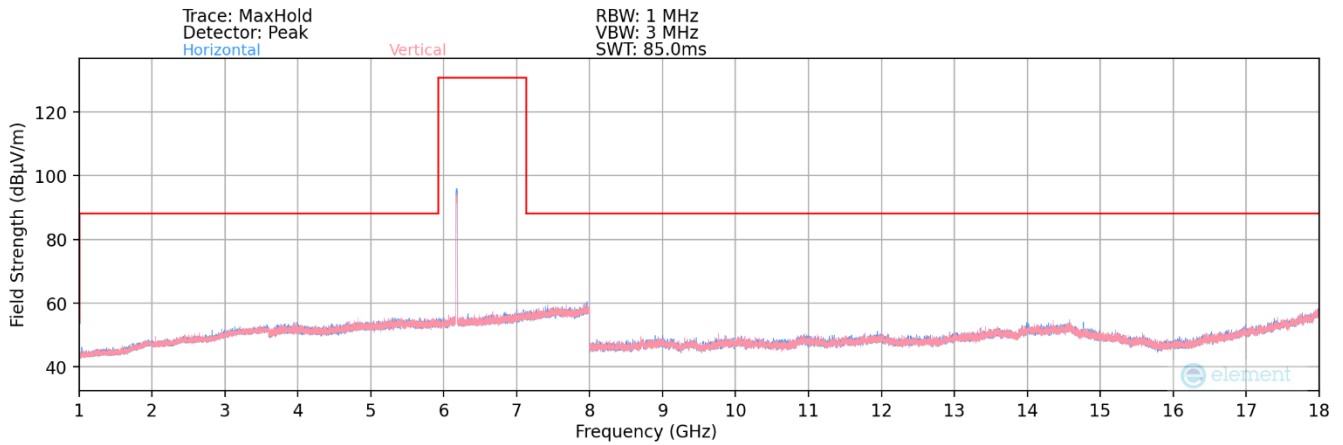

Plot 7-91. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45)

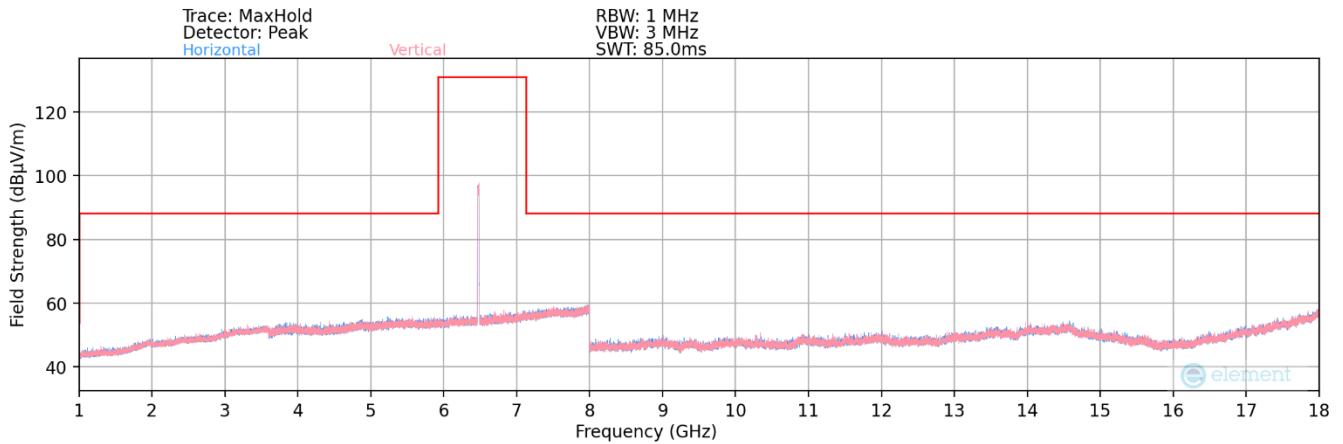


Plot 7-92. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

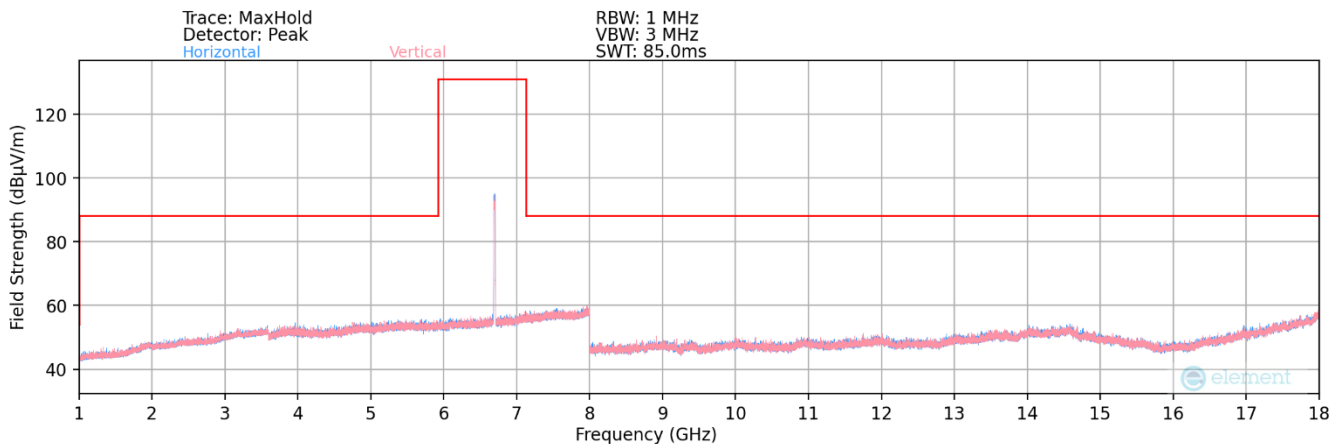


Plot 7-93. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149)


FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 93 of 108

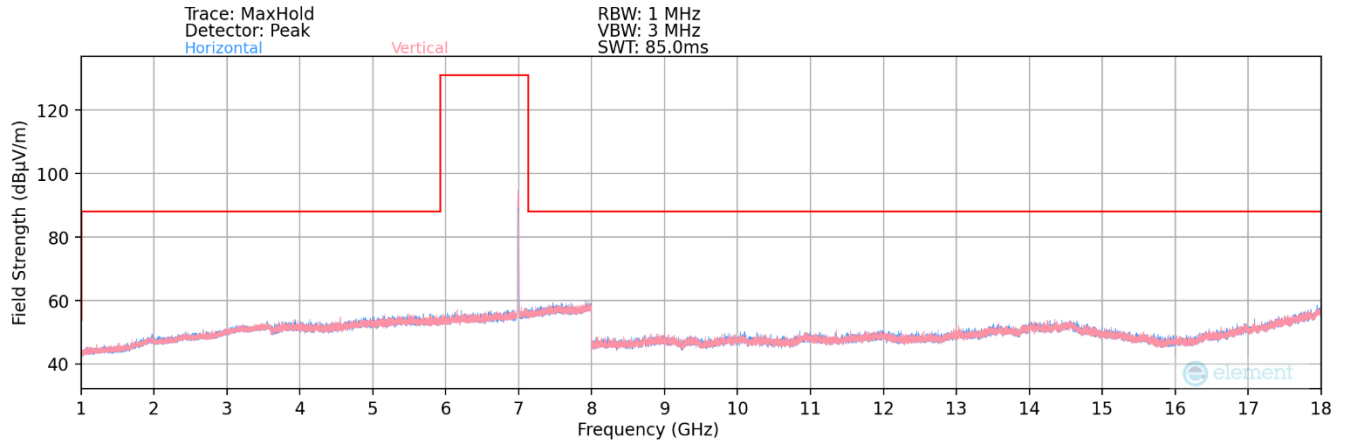

Plot 7-94. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 8 Ch. 209)

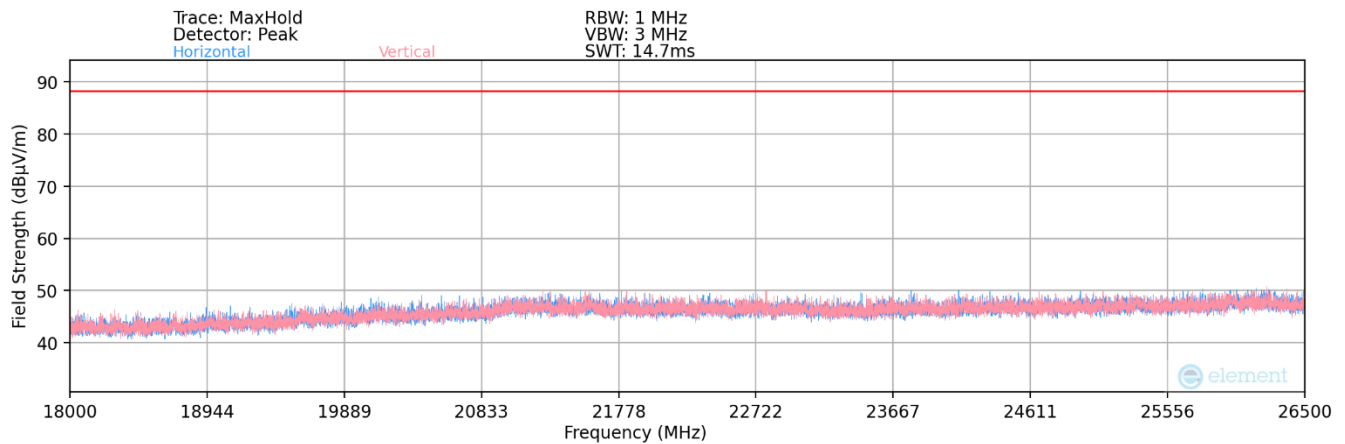

Plot 7-95. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – Ch. 45

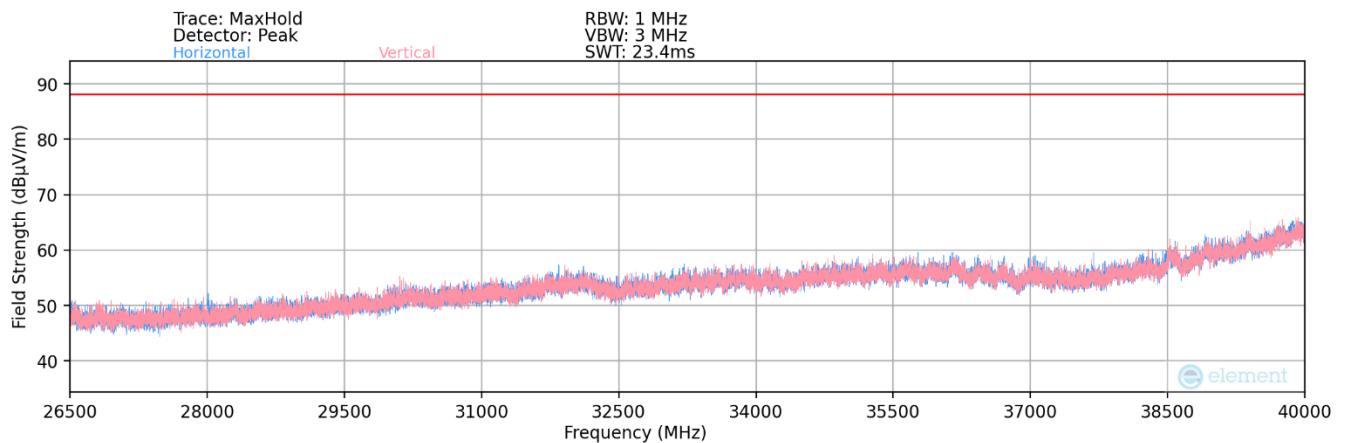

Plot 7-96. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – Ch. 45

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 94 of 108		

7.6.2.1 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	5	2	5935	61	*	11870.00	Average	V	203	47	-76.73	9.61	0.00	39.88	53.98	-14.10
						*	11870.00	Peak	V	203	47	-65.72	9.61	0.00	50.89	73.98	-23.09
						*	17805.00	Average	V	-	-	-77.40	15.94	0.00	45.54	53.98	-8.44
						*	17805.00	Peak	V	-	-	-65.28	15.94	0.00	57.66	73.98	-16.32
						*	23740.00	Average	V	-	-	-62.71	3.52	-9.54	38.27	53.98	-15.71
						*	23740.00	Peak	V	-	-	-52.08	3.52	-9.54	48.90	73.98	-25.08
			45	6175	61		29675.00	Peak	V	-	-	-50.10	5.49	-9.54	52.85	68.20	-15.35
						*	12350.00	Average	V	122	317	-75.26	9.39	0.00	41.13	53.98	-12.85
						*	12350.00	Peak	V	122	317	-65.44	9.39	0.00	50.95	73.98	-23.03
						*	18525.00	Average	V	-	-	-64.48	1.22	-9.54	34.20	53.98	-19.78
						*	18525.00	Peak	V	-	-	-53.46	1.22	-9.54	45.22	73.98	-28.76
							24700.00	Peak	V	-	-	-52.30	3.70	-9.54	48.86	68.20	-19.34
			93	6415	61		30875.00	Peak	V	-	-	-49.35	6.39	-9.54	54.50	68.20	-13.70
							12830.00	Peak	V	112	316	-65.93	9.58	0.00	50.65	68.20	-17.55
						*	19245.00	Average	V	-	-	-63.60	1.95	-9.54	35.81	53.98	-18.17
						*	19245.00	Peak	V	-	-	-53.11	1.95	-9.54	46.30	73.98	-27.68
							25660.00	Peak	V	-	-	-51.90	3.70	-9.54	49.25	68.20	-18.95
							32075.00	Peak	V	-	-	-47.97	7.33	-9.54	56.82	68.20	-11.38

Table 7-31. Radiated Measurements MIMO (242 Tones)

7.6.2.2 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	6	97	6435	61		12870.00	Peak	V	107	317	-66.13	9.89	0.00	50.76	68.20	-17.44
						*	19305.00	Average	V	-	-	-63.67	1.78	-9.54	35.57	53.98	-18.41
						*	19305.00	Peak	V	-	-	-52.95	1.78	-9.54	46.28	73.98	-27.70
							25740.00	Peak	V	-	-	-52.09	3.63	-9.54	49.00	68.20	-19.20
							32175.00	Peak	V	-	-	-48.11	7.35	-9.54	56.70	68.20	-11.50
			105	6475	61		12950.00	Peak	V	110	321	-65.65	9.83	0.00	51.18	68.20	-17.02
						*	19425.00	Average	V	-	-	-63.61	1.96	-9.54	35.82	53.98	-18.16
						*	19425.00	Peak	V	-	-	-53.57	1.96	-9.54	45.86	73.98	-28.12
							25900.00	Peak	V	-	-	-51.56	3.93	-9.54	49.83	68.20	-18.37
							32375.00	Peak	V	-	-	-47.86	6.87	-9.54	56.47	68.20	-11.73
			113	6515	61		13030.00	Peak	V	-	-	-65.68	10.09	0.00	51.41	68.20	-16.79
						*	19545.00	Average	V	-	-	-62.94	2.06	-9.54	36.58	53.98	-17.40
						*	19545.00	Peak	V	-	-	-52.70	2.06	-9.54	46.82	73.98	-27.16
							26060.00	Peak	V	-	-	-51.36	3.93	-9.54	50.03	68.20	-18.17
							32575.00	Peak	V	-	-	-47.91	6.73	-9.54	56.28	68.20	-11.92

Table 7-32. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 95 of 108

7.6.2.3 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 7

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	7	117	6535	61		13070.00	Peak	V	-	-	-65.71	10.22	0.00	51.51	68.20	-16.69
						*	19605.00	Average	V	-	-	-63.08	2.36	-9.54	36.73	53.98	-17.24
						*	19605.00	Peak	V	-	-	-52.95	2.36	-9.54	46.87	73.98	-27.11
							26140.00	Peak	V	-	-	-51.08	4.01	-9.54	50.39	68.20	-17.81
							32675.00	Peak	V	-	-	-48.08	6.84	-9.54	56.23	68.20	-11.97
			149	6695	61	*	13390.00	Average	V	-	-	-77.46	11.02	0.00	40.56	53.98	-13.42
						*	13390.00	Peak	V	-	-	-65.94	11.02	0.00	52.08	73.98	-21.90
						*	20085.00	Average	V	-	-	-62.57	2.60	-9.54	37.49	53.98	-16.49
						*	20085.00	Peak	V	-	-	-52.44	2.60	-9.54	47.63	73.98	-26.35
							26780.00	Peak	V	-	-	-51.06	4.13	-9.54	50.53	68.20	-17.67
			185	6875	61		33475.00	Peak	V	-	-	-47.80	7.38	-9.54	57.04	68.20	-11.16
							13750.00	Peak	V	-	-	-65.66	11.87	0.00	53.21	68.20	-14.99
						*	20625.00	Average	V	-	-	-62.80	3.08	-9.54	37.74	53.98	-16.24
						*	20625.00	Peak	V	-	-	-52.90	3.08	-9.54	47.64	73.98	-26.34
							27500.00	Peak	V	-	-	-50.95	4.02	-9.54	50.52	68.20	-17.68
							34375.00	Peak	V	-	-	-47.43	7.66	-9.54	57.68	68.20	-10.52

Table 7-33. Radiated Measurements MIMO (242 Tones)


7.6.2.4 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 8

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	8	189	6895	61		13790.00	Peak	V	-	-	-65.33	11.58	0.00	53.25	68.20	-14.95
						*	20685.00	Average	V	-	-	-62.44	3.16	-9.54	38.19	53.98	-15.79
						*	20685.00	Peak	V	-	-	-52.67	3.16	-9.54	47.95	73.98	-26.03
							27580.00	Peak	V	-	-	-51.16	4.05	-9.54	50.35	68.20	-17.85
							34475.00	Peak	V	-	-	-47.10	7.56	-9.54	57.92	68.20	-10.28
			209	6995	61		13990.00	Peak	V	-	-	-65.64	11.69	0.00	53.05	68.20	-15.15
						*	20985.00	Average	V	-	-	-62.62	3.48	-9.54	38.32	53.98	-15.66
						*	20985.00	Peak	V	-	-	-52.37	3.48	-9.54	48.58	73.98	-25.40
							27980.00	Peak	V	-	-	-50.85	4.31	-9.54	50.93	68.20	-17.27
							34975.00	Peak	V	-	-	-47.26	7.83	-9.54	58.03	68.20	-10.17
			233	7115	61		14230.00	Peak	V	-	-	-65.90	12.70	0.00	53.80	68.20	-14.40
						*	21345.00	Average	V	-	-	-62.13	3.69	-9.54	39.02	53.98	-14.96
						*	21345.00	Peak	V	-	-	-51.90	3.69	-9.54	49.25	73.98	-24.73
							28460.00	Peak	V	-	-	-51.18	4.65	-9.54	50.94	68.20	-17.26
							35575.00	Peak	V	-	-	-46.43	7.99	-9.54	59.02	68.20	-9.18

Table 7-34. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 96 of 108

7.6.3 MIMO Radiated Spurious Emission Measurements (MRU)

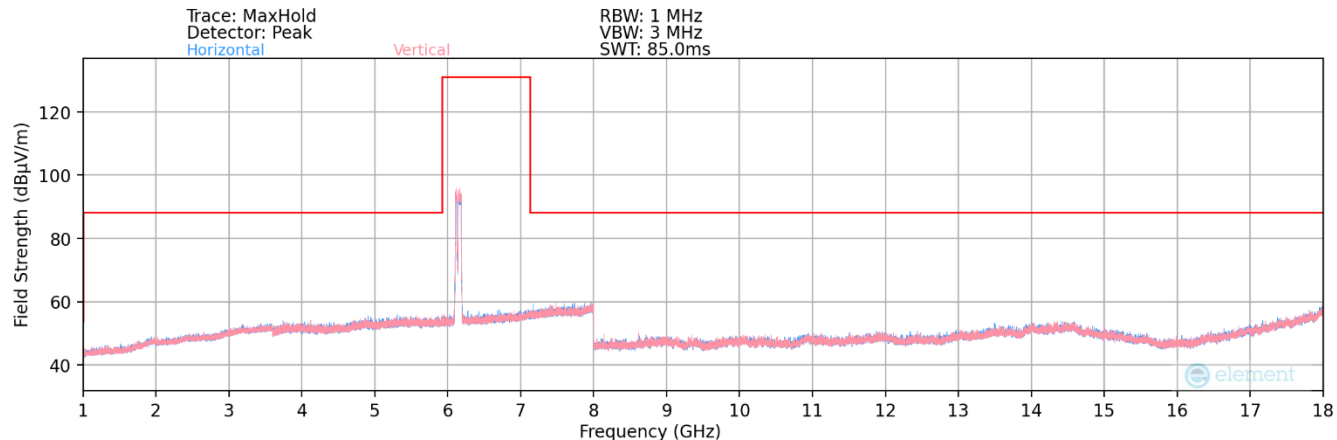


Plot 7-97. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11be – UNII Band 5 Ch. 39) – 484+242 Tones

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 97 of 108


7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

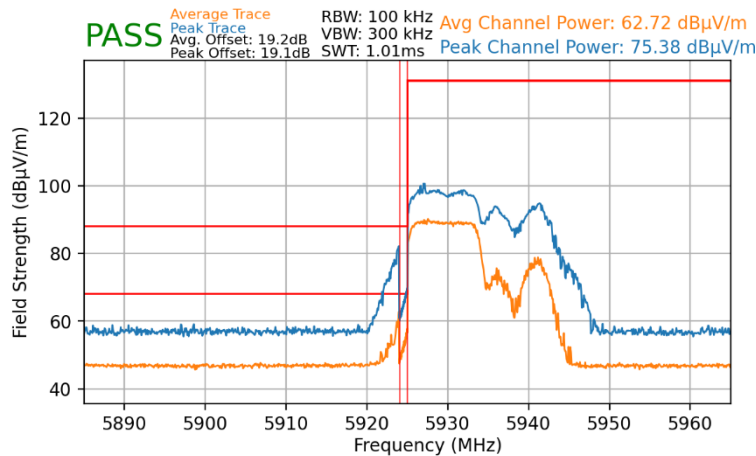

**Plot 7-98. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 106T)**

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

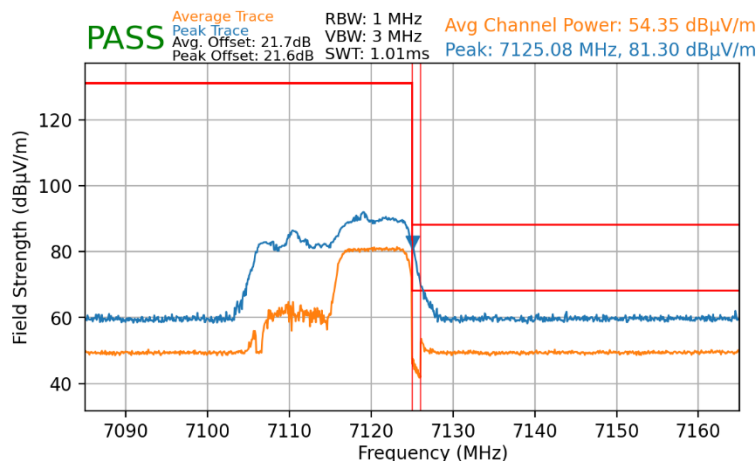


**Plot 7-99. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 8 – 106T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 98 of 108


7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 82
 Distance of Measurements: 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

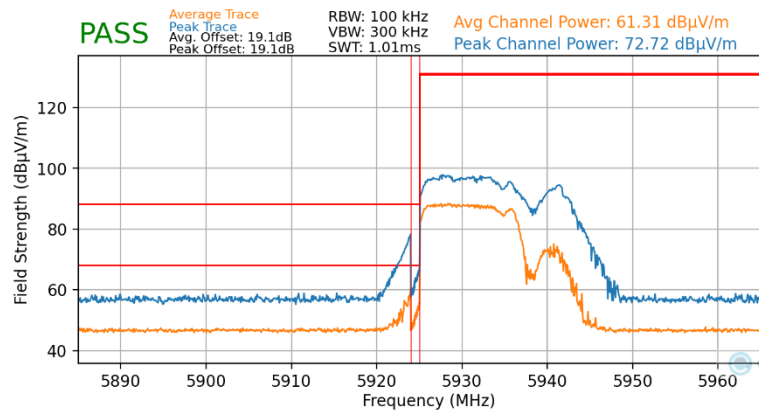

**Plot 7-100. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 106+26T)**

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 83
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

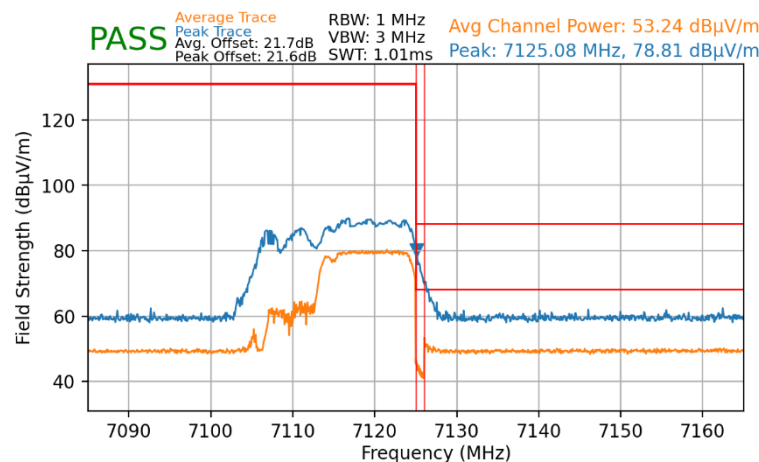


**Plot 7-101. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 8 – 106+26T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 99 of 108


7.6.6 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5935MHz
Channel: 2

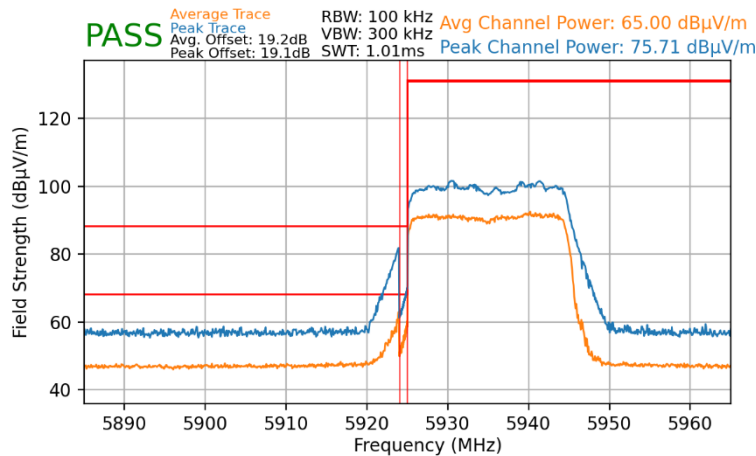

**Plot 7-102. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 242T)**

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

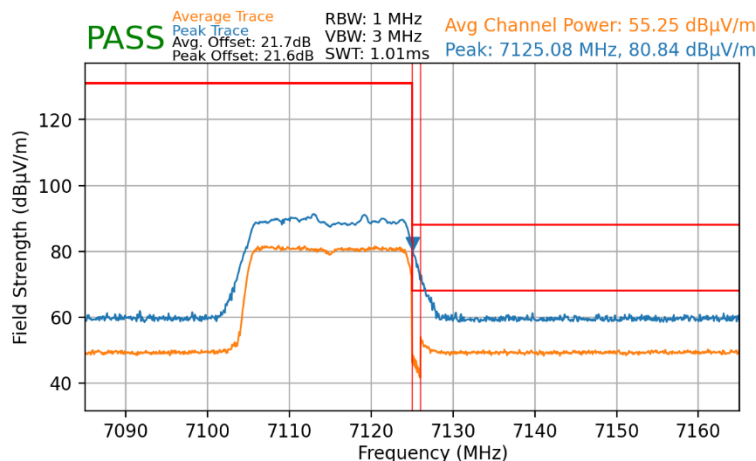


**Plot 7-103. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 8 – 242T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 100 of 108


7.6.7 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

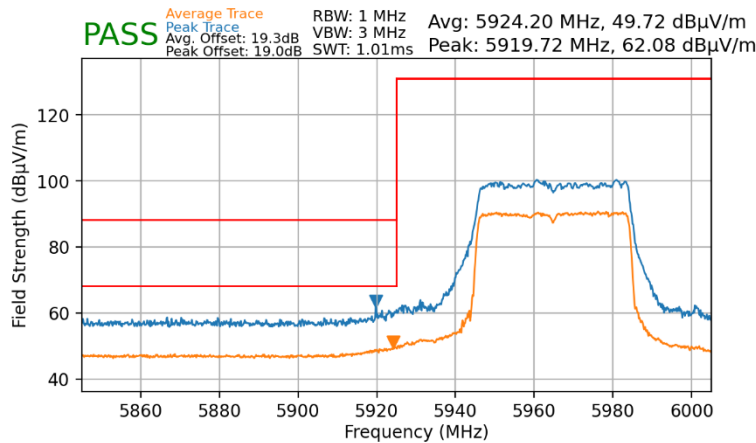

**Plot 7-104. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 484T)**

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

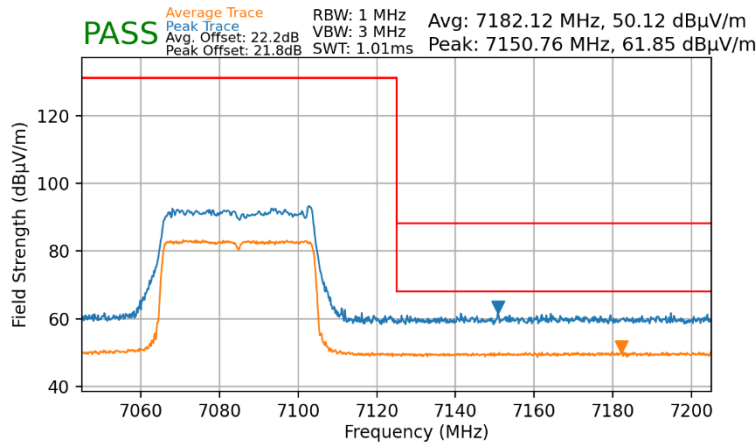


**Plot 7-105. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 484T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 101 of 108


7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

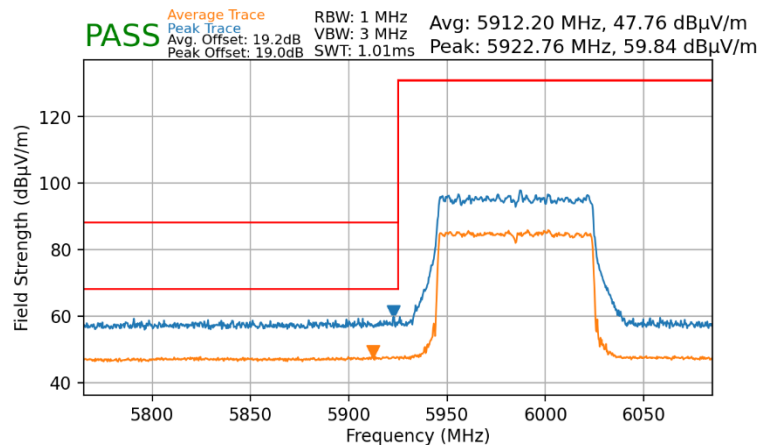

**Plot 7-106. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 996T)**

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

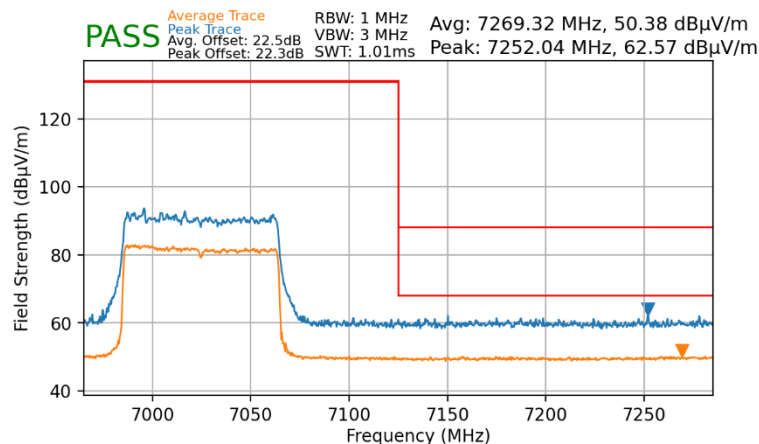


**Plot 7-107. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 996T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 102 of 108


7.6.9 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	93
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

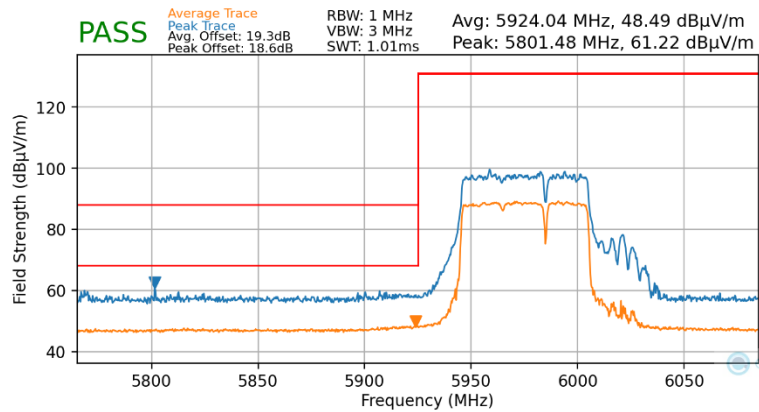

**Plot 7-108. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 484+242T)**

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	91
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

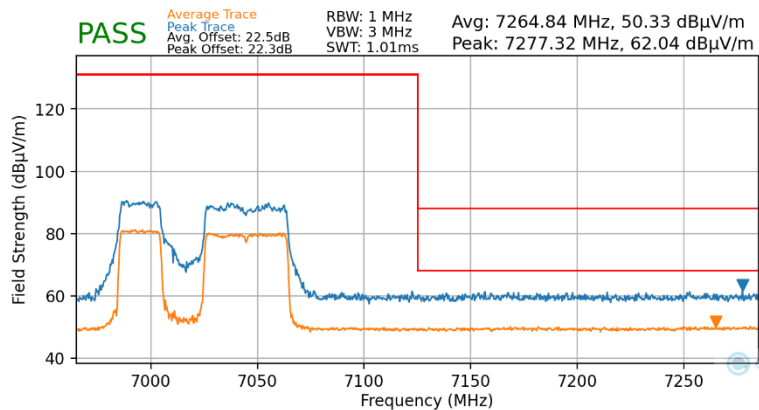


**Plot 7-109. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 8 – 484+242T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 103 of 108


7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

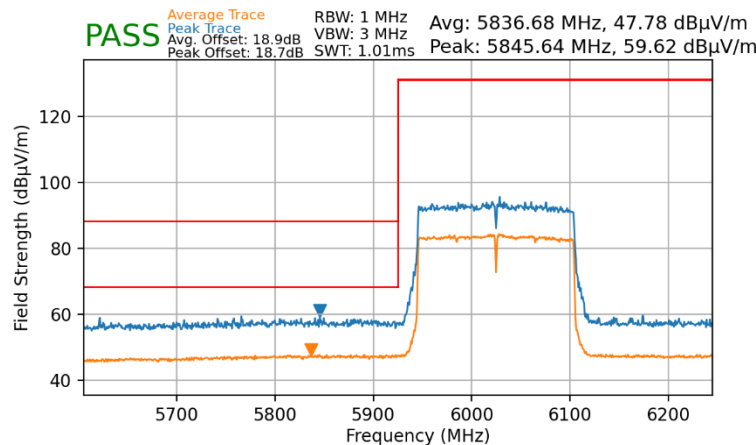

Plot 7-110. Radiated Lower Band Edge Plot MIMO (Average & Peak – UNII Band 5 – 2x996T)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

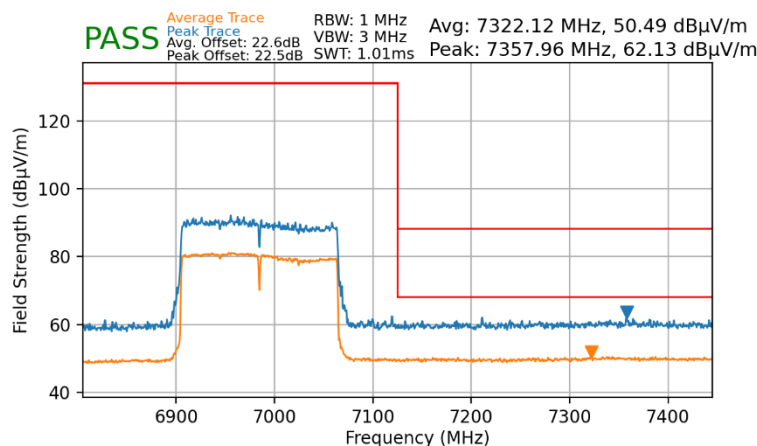


Plot 7-111. Radiated Upper Band Edge Plot MIMO (Average & Peak – UNII Band 8 – 2x996T)

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 104 of 108


7.6.11 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 95
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

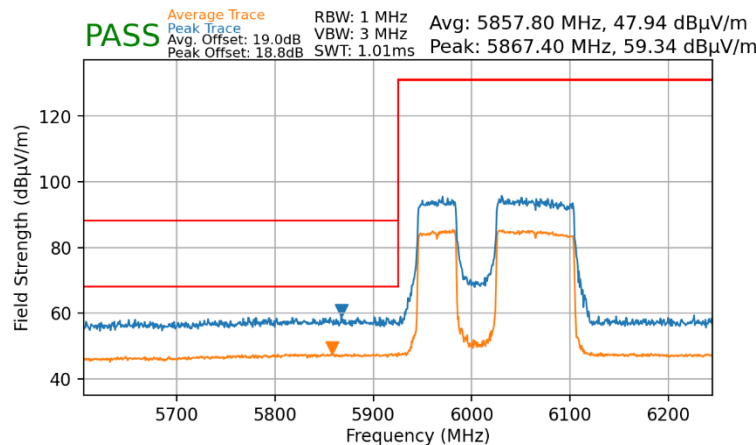

Plot 7-112. Radiated Lower Band Edge Plot MIMO (Average & Peak – UNII Band 5 – 996+484T)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 RU Index: 95
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

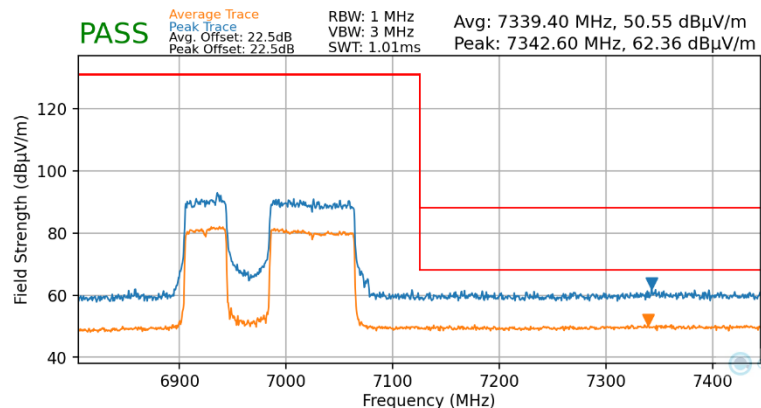


Plot 7-113. Radiated Upper Band Edge Plot MIMO (Average & Peak – UNII Band 8 – 996+484T)

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 105 of 108


7.6.12 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 69
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

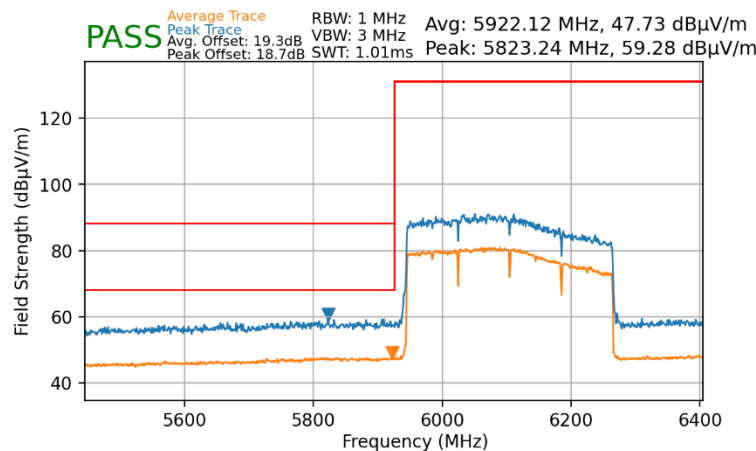

Plot 7-114. Radiated Lower Band Edge Plot MIMO (Average & Peak – UNII Band 5 – 4*996T)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 69
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

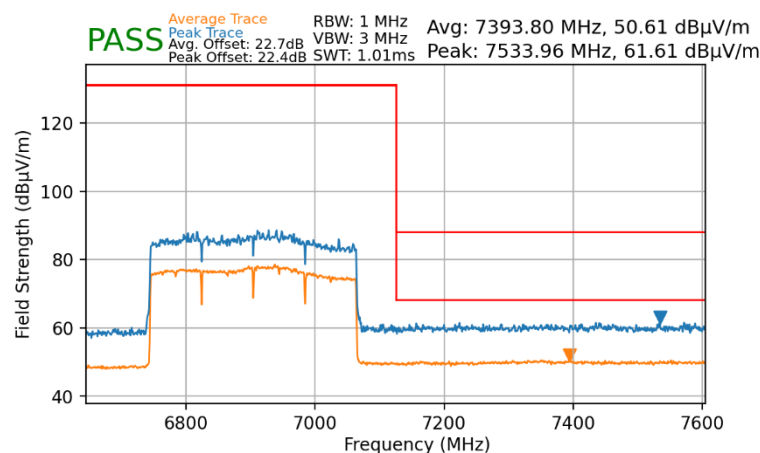


Plot 7-115. Radiated Upper Band Edge Plot MIMO (Average & Peak – UNII Band 8 – 4*996T)

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 106 of 108


7.6.13 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T)

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 10104
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

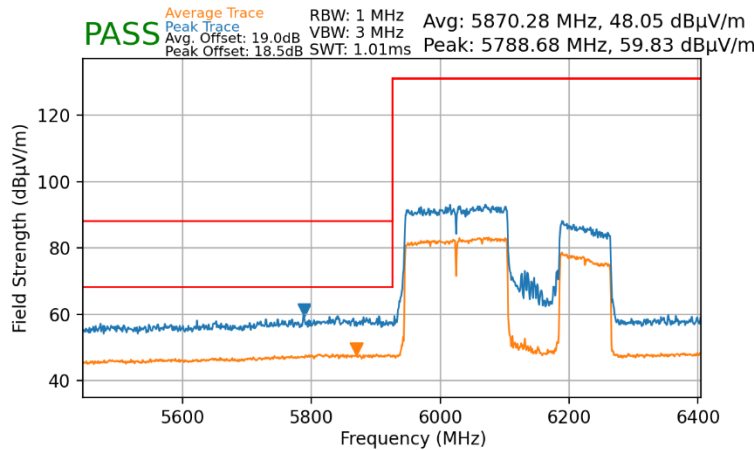

**Plot 7-116. Radiated Lower Band Edge Plot MIMO
(Average & Peak – UNII Band 5 – 3*996T)**

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
RU Index: 1106
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

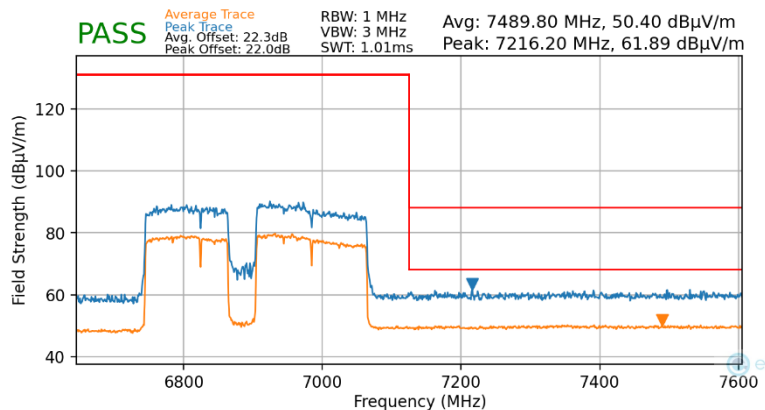

**Plot 7-117. Radiated Upper Band Edge Plot MIMO
(Average & Peak – UNII Band 8 – 3*996+484T)**

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 107 of 108

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF776U, IC: 649E-SMF776W** is in compliance with FCC Part Subpart E (15.407) of the FCC rules and RSS-248 Issue 3 of the ISED Canada rules for operation as a Very Low Power Device.

- END OF TEST REPORT -

FCC ID: A3LSMF776U IC: 649E-SMF776W	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/24/2026 - 4/24/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-21-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 108 of 108