

**MEASUREMENT REPORT**
FCC PART 15.247 WLAN 802.11ax OFDMA**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

01/22/2019 - 03/28/2019

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1901280020-06.A3L

FCC ID:

A3LSMF900F

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F900F

EUT Type:

Portable Handset

Frequency Range:

2412 – 2472MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r01,
KDB 662911 D01 v02r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Orlanez
President

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 1 of 115


TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	7
2.4	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Emissions	8
3.3	Environmental Conditions	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA	11
7.0	TEST RESULTS.....	12
7.1	Summary	12
7.2	6dB Bandwidth Measurement	13
7.3	Output Power Measurement.....	22
7.4	Power Spectral Density	31
7.5	Conducted Emissions at the Band Edge	41
7.6	Conducted Spurious Emissions.....	50
7.7	Radiated Spurious Emission Measurements – Above 1 GHz.....	64
7.7.1	SISO Antenna-1 Radiated Spurious Emission Measurements	68
7.7.2	SISO Antenna-2 Radiated Spurious Emission Measurements	75
7.7.3	MIMO Radiated Spurious Emission Measurements	82
7.7.4	SISO Antenna-1 Radiated Restricted Band Edge Measurements.....	89
7.7.5	SISO Antenna-2 Radiated Restricted Band Edge Measurements.....	96
7.7.6	MIMO Radiated Restricted Band Edge Measurements	102
7.8	Radiated Spurious Emissions Measurements – Below 1GHz	109
8.0	CONCLUSION	115

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 2 of 115	



MEASUREMENT REPORT



Mode	Tones	Tx Frequency [MHz]	ANT1				ANT2				MIMO			
			Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11ax OFDMA	26T	2412 - 2462	25.061	13.99	146.218	21.65	25.003	13.98	147.231	21.68	24.781	13.94	145.246	21.62
802.11ax OFDMA	52T	2412 - 2462	31.405	14.97	187.932	22.74	31.477	14.98	184.927	22.67	31.315	14.96	185.507	22.68
802.11ax OFDMA	106T	2412 - 2462	39.628	15.98	214.289	23.31	39.628	15.98	236.592	23.74	39.620	15.98	235.631	23.72
802.11ax OFDMA	242T	2412 - 2462	45.499	16.58	222.844	23.48	49.091	16.91	257.632	24.11	49.117	16.91	285.582	24.56

EUT Overview

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 3 of 115

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 4 of 115	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF900F**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 0020M, 0088M, 0007M, 0093M, 0802M, 0025M, 0023M, 1359M, 1362M, 1389M, 1402M, 1365M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Tone	duty cycle
802.11ax DTS RU	1	26T	99.2
		52T	99.7
		106T	99.3
		242T	99.1
802.11ax DTS RU	2	26T	99.2
		52T	99.6
		106T	99.2
		242T	99.1
802.11ax RU DTS	MIMO SDM	26T	99.7
		52T	99.2
		106T	99.2
		242T	99.1

Table 2-2. Measured Duty Cycles

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 5 of 115

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD/MIMO	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ax	✓	✓	✓	✓	✓	✓

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	56
Operating Frequency (MHz)	2437	5280
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 2-4. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Configuration 2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	1	165
Operating Frequency (MHz)	2412	5825
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 2-5. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 6 of 115

Configuration 3: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	165
Operating Frequency (MHz)	2462	5825
Data Rate (Mbps)	6	6
Mode	802.11g	802.11a

Table 2-6. Config-3 (ANT1 MIMO & ANT2 MIMO)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 7.7 and 7.8 for radiated emissions test setups and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

This device supports two configurations: one is with screen open and one is with screen closed. Both configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 7 of 115	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 8 of 115

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 9 of 115	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 10 of 115

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	10/31/2018	Annual	10/31/2019	WL25-1
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	6/15/2018	Annual	6/15/2019	US42510244
Agilent	N9038A	MXE EMI Receiver	6/11/2018	Annual	6/11/2019	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Anritsu	MA2411B	Pulse Power Sensor	8/22/2018	Annual	8/22/2019	1315051
Anritsu	ML2495A	Power Meter	10/5/2018	Annual	10/5/2019	1328004
Anritsu	MA2411B	Pulse Power Sensor	9/27/2018	Annual	9/27/2019	1339026
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	9/17/2018	Annual	9/17/2019	441119
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	135427
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	6/18/2018	Biennial	6/18/2020	114451
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/28/2018	Annual	3/28/2019	150693
Huber + Suhner	Sucoflex 102A	40GHz Radiated Cable Set	8/23/2018	Annual	8/23/2019	251425001
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	8/23/2018	Annual	8/23/2019	NMLC-2
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	9/19/2018	Annual	9/19/2019	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/21/2018	Annual	5/21/2019	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/18/2018	Annual	6/18/2019	102134
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 11 of 115	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.

FCC ID: A3LSMF900F

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	See WLAN Test Report

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 0.2.16.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 12 of 115	

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

KDB 558074 D01 v05r01 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 13 of 115

SISO Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax	26T	MCS0	2.15	0.500
2437	6	ax	26T	MCS0	2.09	0.500
2462	11	ax	26T	MCS0	2.13	0.500
2412	1	ax	242T	MCS0	18.97	0.500
2437	6	ax	242T	MCS0	19.00	0.500
2462	11	ax	242T	MCS0	19.09	0.500

Table 7-2. Conducted Bandwidth Measurements SISO ANT1

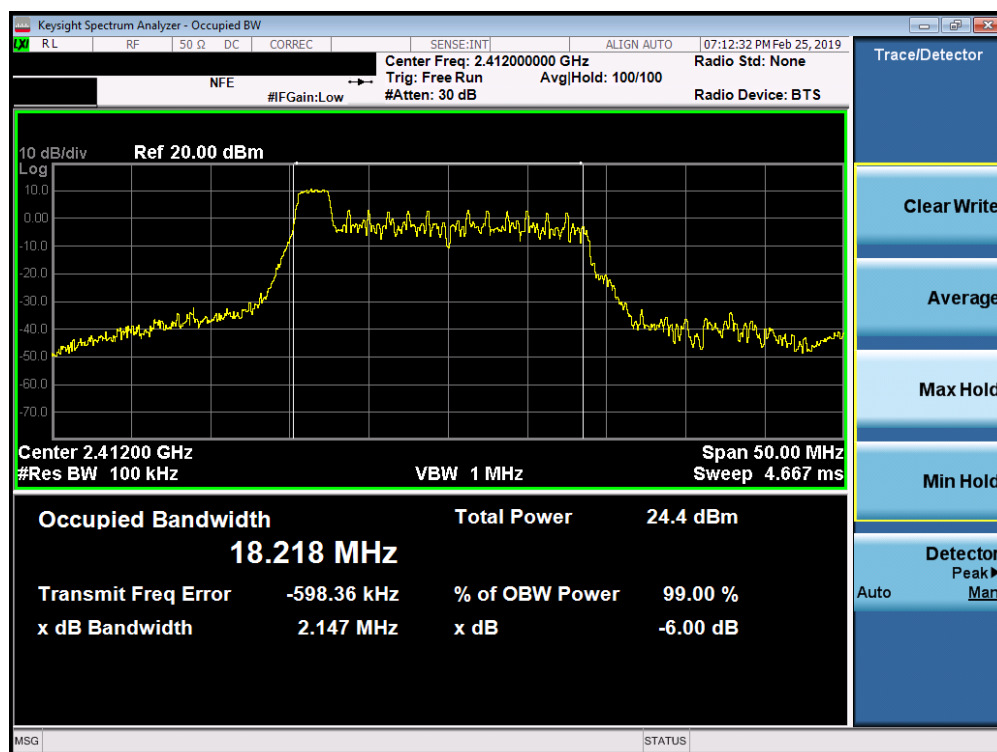


Plot 7-1. 6dB Bandwidth Plot SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 14 of 115

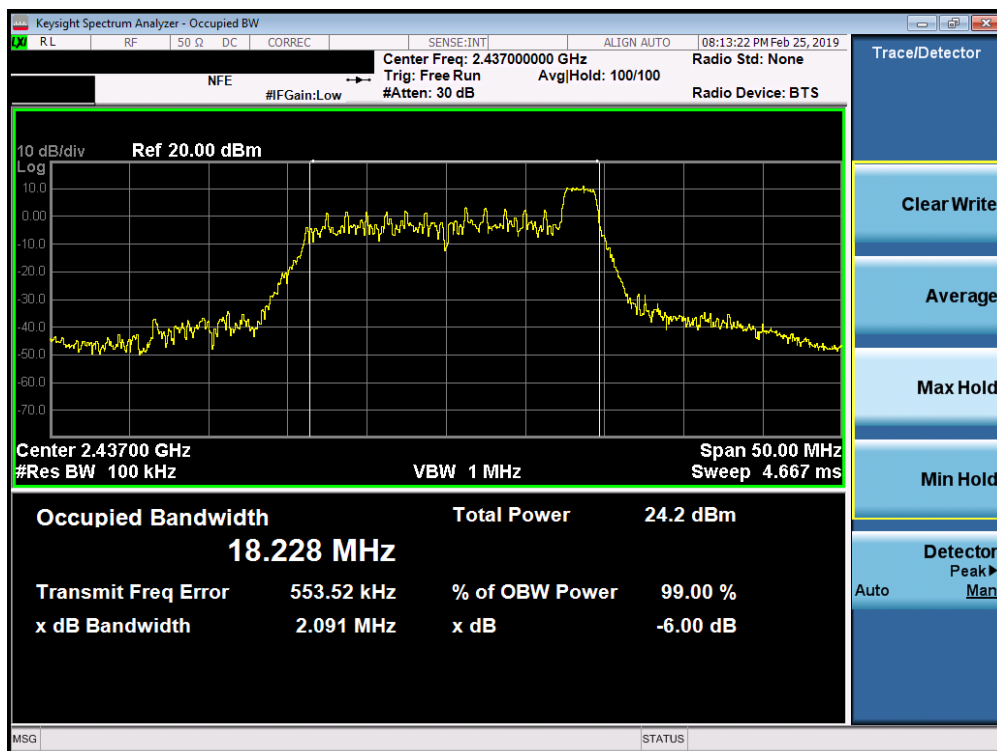


Plot 7-2. 6dB Bandwidth Plot SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6)

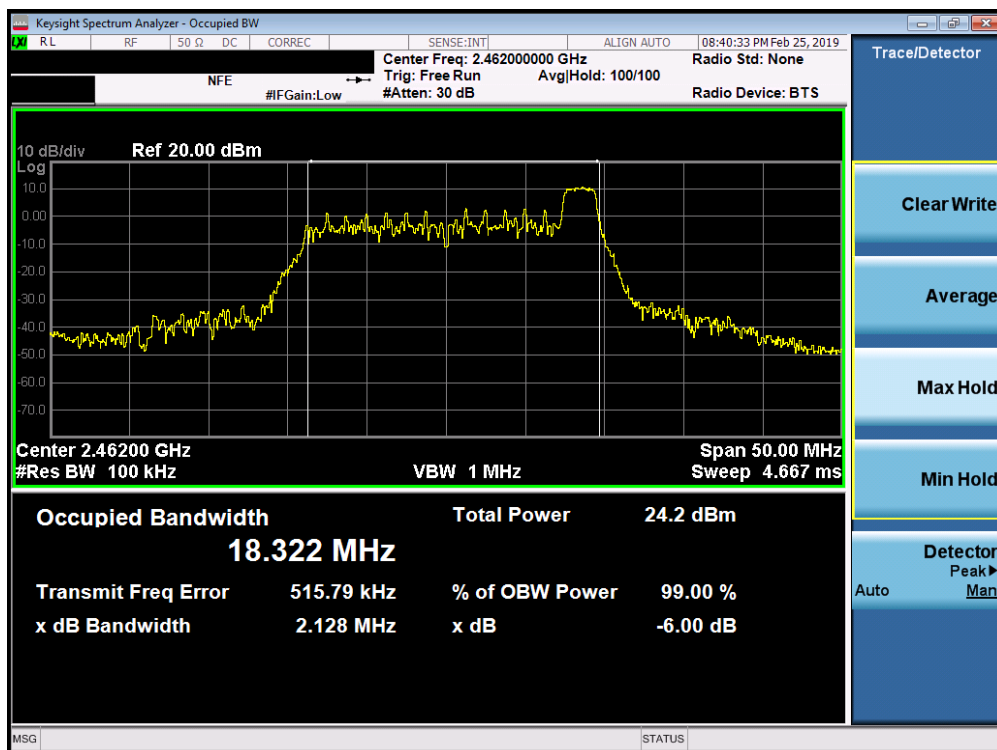


Plot 7-3. 6dB Bandwidth Plot SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 15 of 115

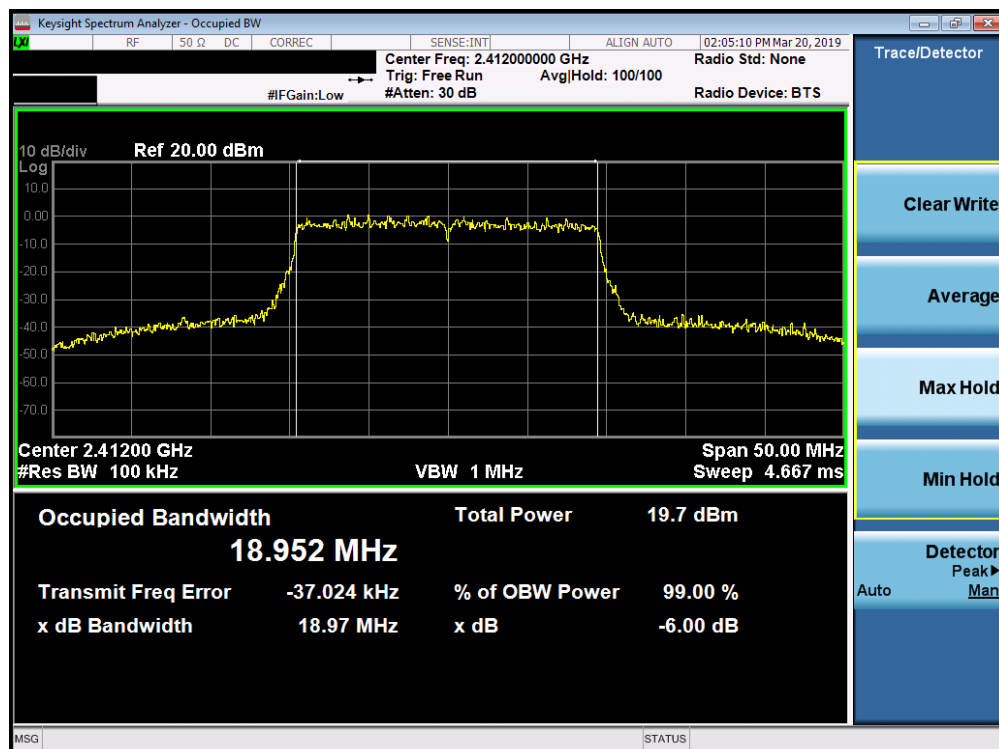


Plot 7-4. 6dB Bandwidth Plot SISO ANT1 (802.11ax OFDMA - 242 Tones - Ch. 1)

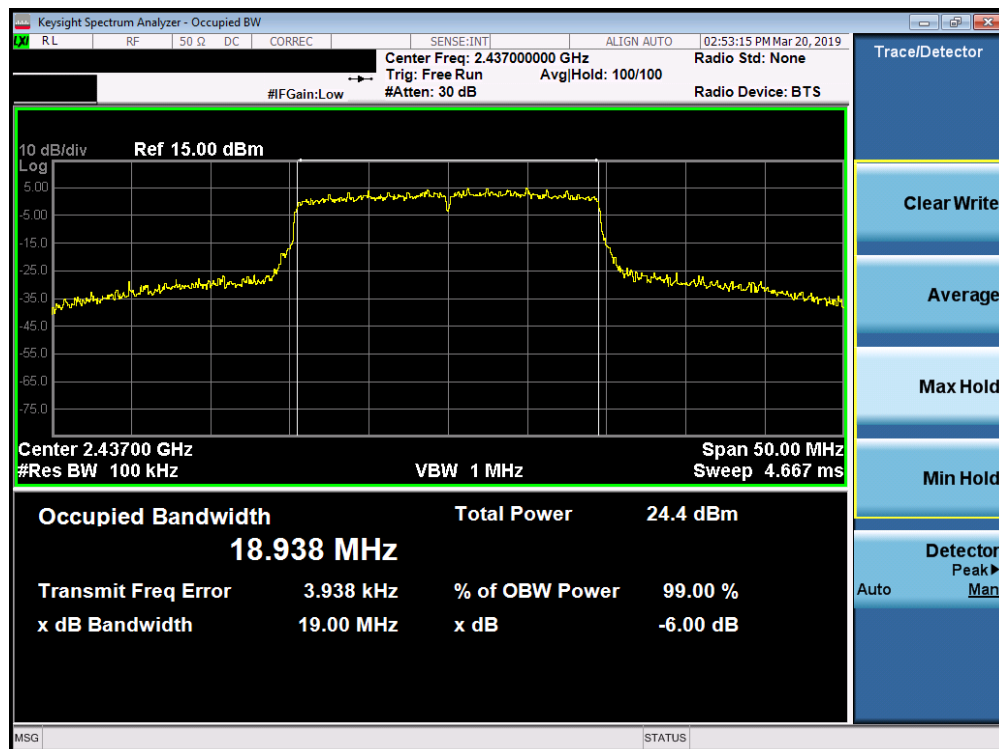

Plot 7-5. 6dB Bandwidth Plot SISO ANT1 (802.11ax OFDMA - 242 Tones - Ch. 6)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 16 of 115

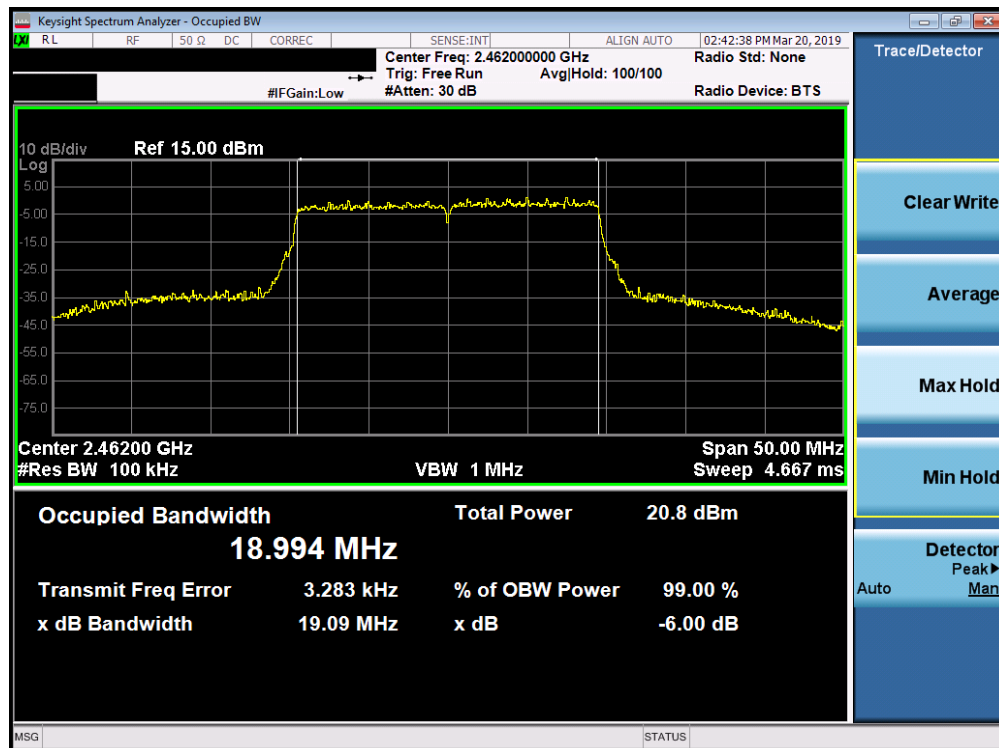


Plot 7-6. 6dB Bandwidth Plot SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 17 of 115

SISO Antenna-2 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax	26T	MCS0	2.09	0.500
2437	6	ax	26T	MCS0	2.15	0.500
2462	11	ax	26T	MCS0	2.73	0.500
2412	1	ax	242T	MCS0	19.01	0.500
2437	6	ax	242T	MCS0	19.02	0.500
2462	11	ax	242T	MCS0	19.15	0.500

Table 7-3. Conducted Bandwidth Measurements SISO ANT2

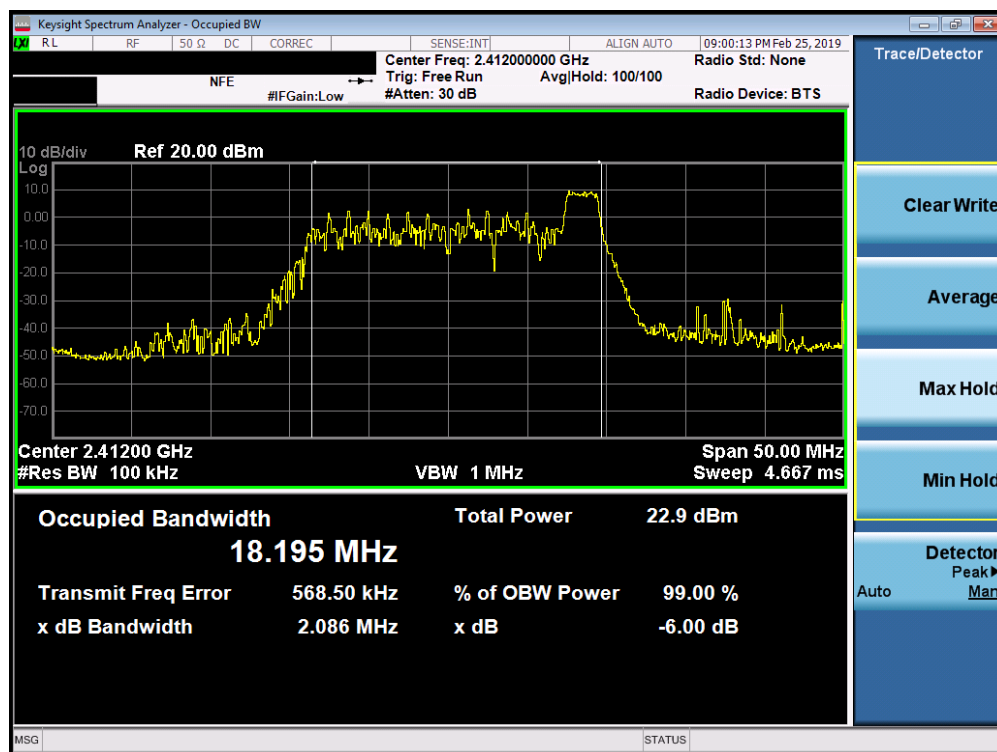


Plot 7-7. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 18 of 115

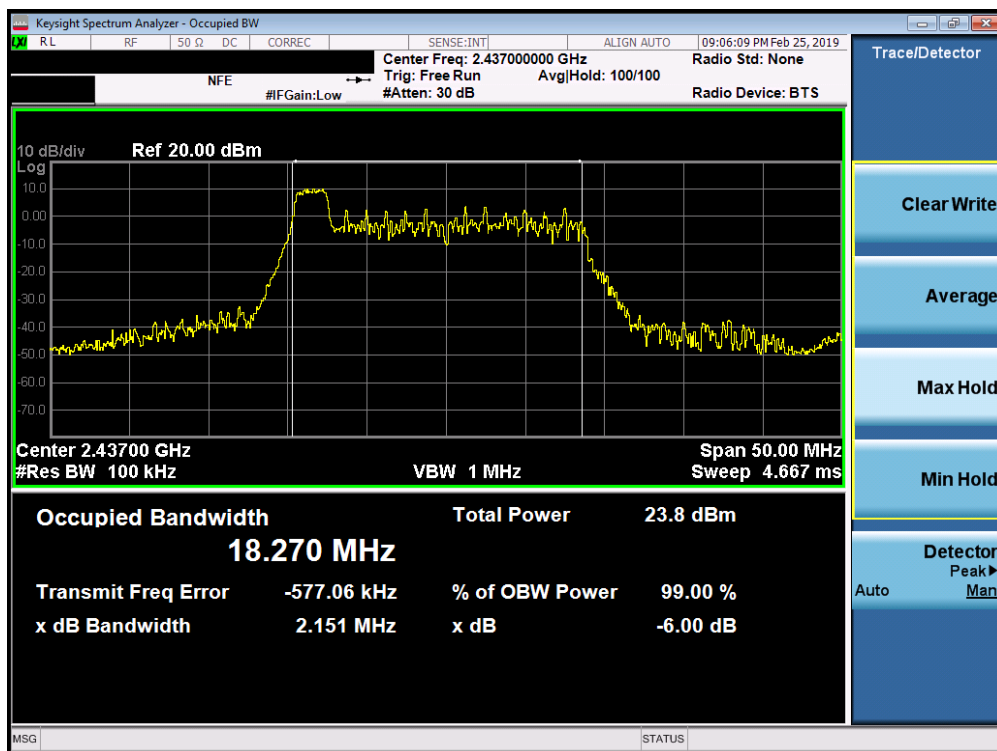


Plot 7-8. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA - 26 Tones - Ch. 6)

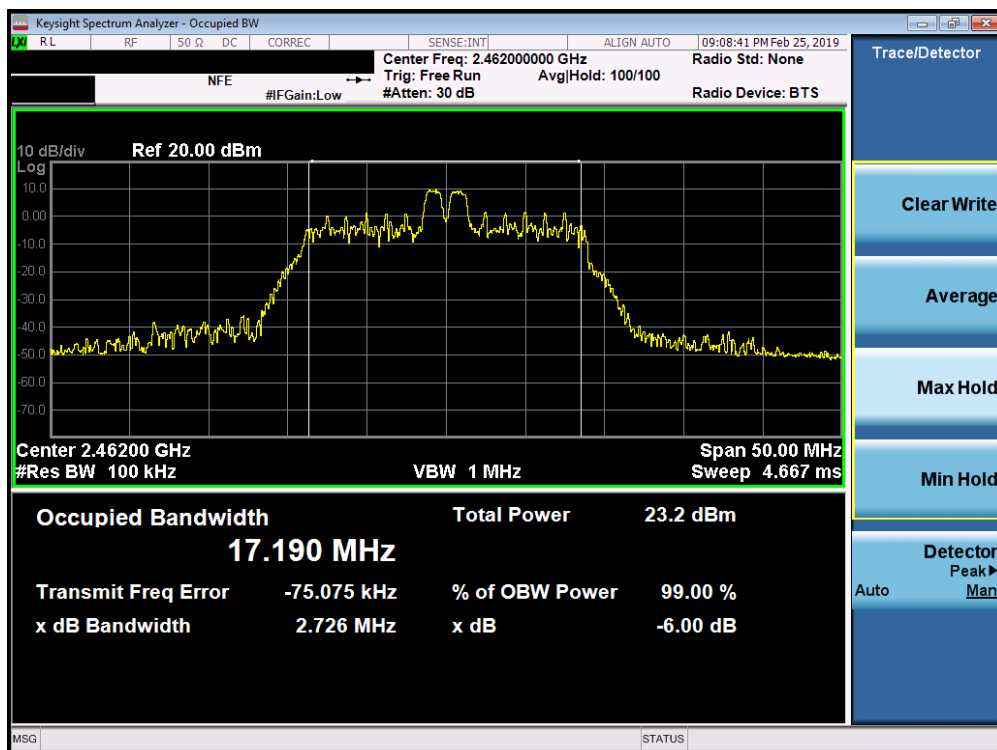


Plot 7-9. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA - 26 Tones - Ch. 11)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset				Page 19 of 115

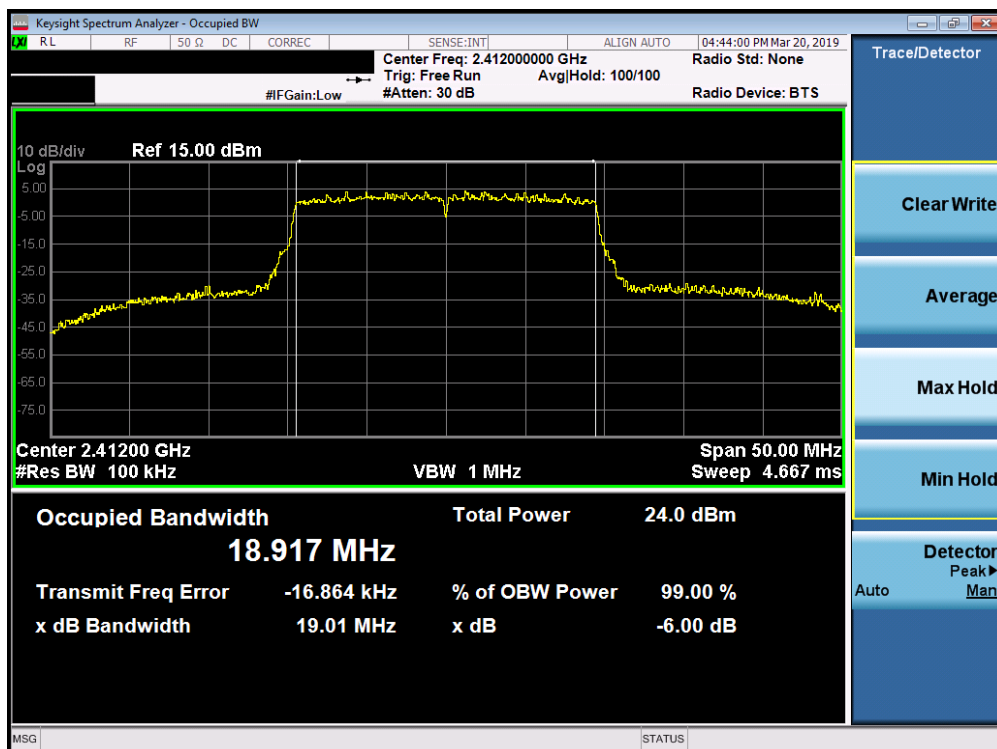


Plot 7-10. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

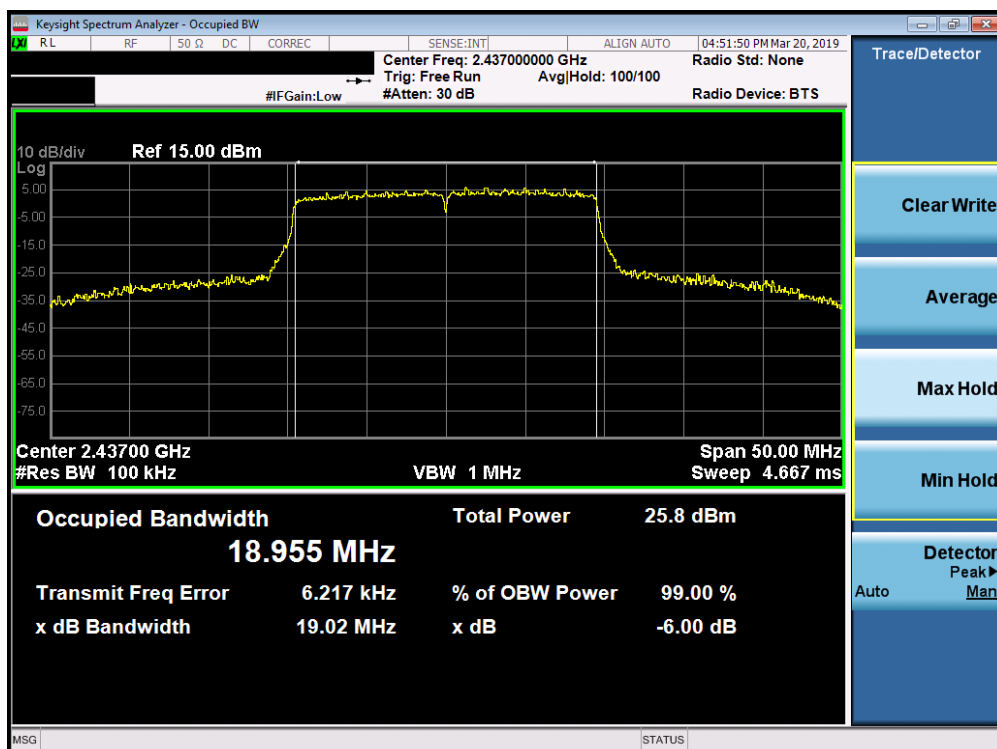

Plot 7-11. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 20 of 115

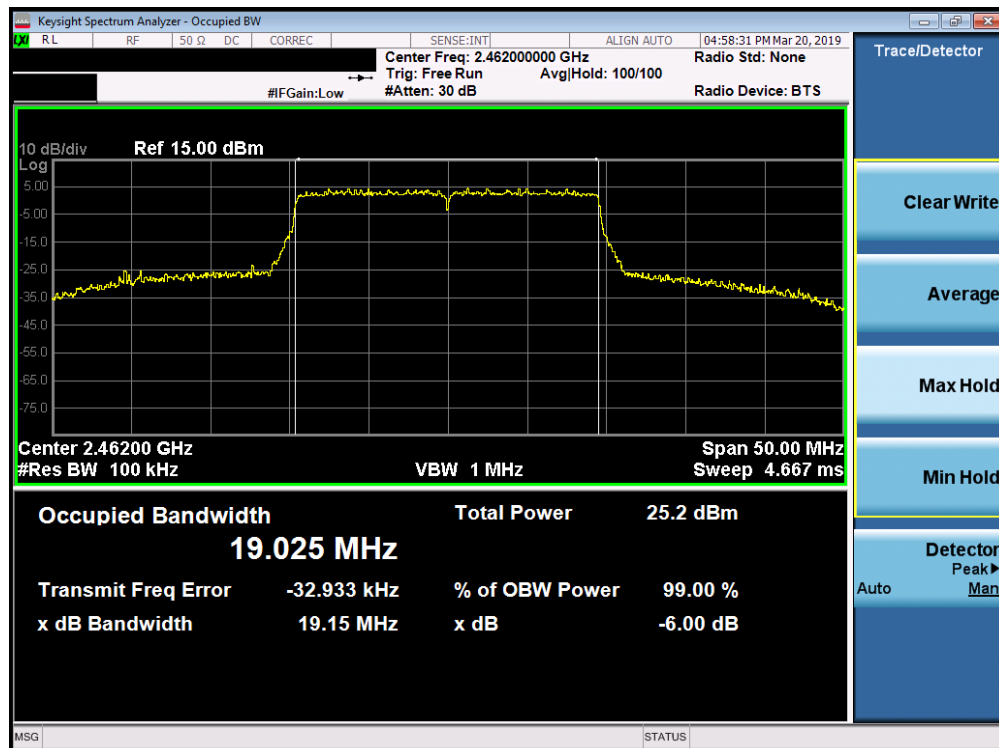

Plot 7-12. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 21 of 115

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
KDB 558074 D01 v05r01 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
KDB 558074 D01 v05r01 – Section 8.3.2.3 Measurement using a Power Meter (PM)
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 22 of 115

Antenna-1

2.4GHZ	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	26T	0	AVG	13.97	30.00	-16.03	-7.50	6.47	36.02	-29.55
					PEAK	21.65	30.00	-8.35	-7.50	14.15	36.02	-21.87
				4	AVG	13.56	30.00	-16.44	-7.50	6.06	36.02	-29.96
					PEAK	21.07	30.00	-8.93	-7.50	13.57	36.02	-22.45
				8	AVG	13.63	30.00	-16.37	-7.50	6.13	36.02	-29.89
					PEAK	21.12	30.00	-8.88	-7.50	13.62	36.02	-22.40
	2417	2	26T	0	AVG	13.54	30.00	-16.46	-7.50	6.04	36.02	-29.98
					PEAK	20.76	30.00	-9.24	-7.50	13.26	36.02	-22.76
				4	AVG	13.52	30.00	-16.48	-7.50	6.02	36.02	-30.00
					PEAK	20.79	30.00	-9.21	-7.50	13.29	36.02	-22.73
				8	AVG	13.60	30.00	-16.40	-7.50	6.10	36.02	-29.92
					PEAK	20.74	30.00	-9.26	-7.50	13.24	36.02	-22.78
	2422	3	26T	0	AVG	13.37	30.00	-16.63	-7.50	5.87	36.02	-30.15
					PEAK	20.49	30.00	-9.51	-7.50	12.99	36.02	-23.03
				4	AVG	13.96	30.00	-16.04	-7.50	6.46	36.02	-29.56
					PEAK	21.03	30.00	-8.97	-7.50	13.53	36.02	-22.49
				8	AVG	13.51	30.00	-16.49	-7.50	6.01	36.02	-30.01
					PEAK	20.82	30.00	-9.18	-7.50	13.32	36.02	-22.70
	2437	6	26T	0	AVG	13.65	30.00	-16.35	-7.50	6.15	36.02	-29.87
					PEAK	21.11	30.00	-8.89	-7.50	13.61	36.02	-22.41
				4	AVG	13.71	30.00	-16.29	-7.50	6.21	36.02	-29.81
					PEAK	21.14	30.00	-8.86	-7.50	13.64	36.02	-22.38
				8	AVG	13.99	30.00	-16.01	-7.50	6.49	36.02	-29.53
					PEAK	21.60	30.00	-8.40	-7.50	14.10	36.02	-21.92
	2457	10	26T	0	AVG	13.58	30.00	-16.42	-7.44	6.14	36.02	-29.88
					PEAK	20.93	30.00	-9.07	-7.44	13.49	36.02	-22.53
				4	AVG	13.65	30.00	-16.35	-7.44	6.21	36.02	-29.81
					PEAK	21.04	30.00	-8.96	-7.44	13.60	36.02	-22.42
				8	AVG	13.74	30.00	-16.26	-7.44	6.30	36.02	-29.72
					PEAK	21.12	30.00	-8.88	-7.44	13.68	36.02	-22.34
	2462	11	26T	0	AVG	13.92	30.00	-16.08	-7.44	6.48	36.02	-29.54
					PEAK	21.24	30.00	-8.76	-7.44	13.80	36.02	-22.22
				4	AVG	13.97	30.00	-16.03	-7.44	6.53	36.02	-29.49
					PEAK	21.48	30.00	-8.52	-7.44	14.04	36.02	-21.98
				8	AVG	13.99	30.00	-16.01	-7.44	6.55	36.02	-29.47
					PEAK	21.22	30.00	-8.78	-7.44	13.78	36.02	-22.24
	2467	12	26T	0	AVG	13.34	30.00	-16.66	-7.44	5.90	36.02	-30.12
					PEAK	20.54	30.00	-9.46	-7.44	13.10	36.02	-22.92
				4	AVG	13.91	30.00	-16.09	-7.44	6.47	36.02	-29.55
					PEAK	21.19	30.00	-8.81	-7.44	13.75	36.02	-22.27
				8	AVG	13.38	30.00	-16.62	-7.44	5.94	36.02	-30.08
					PEAK	20.45	30.00	-9.55	-7.44	13.01	36.02	-23.01
	2472	13	26T	0	AVG	-3.75	30.00	-33.75	-7.83	-11.58	36.02	-47.60
					PEAK	4.01	30.00	-25.99	-7.83	-3.82	36.02	-39.84
				4	AVG	-3.35	30.00	-33.35	-7.83	-11.18	36.02	-47.20
					PEAK	4.11	30.00	-25.89	-7.83	-3.72	36.02	-39.74
				8	AVG	-3.10	30.00	-33.10	-7.83	-10.93	36.02	-46.95
					PEAK	4.35	30.00	-25.65	-7.83	-3.48	36.02	-39.50

Table 7-4. Conducted Output Power Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset			Page 23 of 115

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	52T	37	AVG	14.90	30.00	-15.10	-7.50	7.40	36.02	-28.62
					PEAK	22.68	30.00	-7.32	-7.50	15.18	36.02	-20.84
				38	AVG	14.92	30.00	-15.08	-7.50	7.42	36.02	-28.60
					PEAK	22.64	30.00	-7.36	-7.50	15.14	36.02	-20.88
				40	AVG	14.72	30.00	-15.28	-7.50	7.22	36.02	-28.80
					PEAK	22.53	30.00	-7.47	-7.50	15.03	36.02	-20.99
	2417	2	52T	37	AVG	14.87	30.00	-15.13	-7.50	7.37	36.02	-28.65
					PEAK	21.83	30.00	-8.17	-7.50	14.33	36.02	-21.69
				38	AVG	14.91	30.00	-15.09	-7.50	7.41	36.02	-28.61
					PEAK	21.83	30.00	-8.17	-7.50	14.33	36.02	-21.69
				40	AVG	14.59	30.00	-15.41	-7.50	7.09	36.02	-28.93
					PEAK	21.53	30.00	-8.47	-7.50	14.03	36.02	-21.99
	2422	3	52T	37	AVG	14.67	30.00	-15.33	-7.50	7.17	36.02	-28.85
					PEAK	21.68	30.00	-8.32	-7.50	14.18	36.02	-21.84
				38	AVG	14.38	30.00	-15.62	-7.50	6.88	36.02	-29.14
					PEAK	21.41	30.00	-8.59	-7.50	13.91	36.02	-22.11
				40	AVG	14.41	30.00	-15.59	-7.50	6.91	36.02	-29.11
					PEAK	21.60	30.00	-8.40	-7.50	14.10	36.02	-21.92
	2437	6	52T	37	AVG	14.83	30.00	-15.17	-7.50	7.33	36.02	-28.69
					PEAK	22.55	30.00	-7.45	-7.50	15.05	36.02	-20.97
				38	AVG	14.89	30.00	-15.11	-7.50	7.39	36.02	-28.63
					PEAK	22.48	30.00	-7.52	-7.50	14.98	36.02	-21.04
				40	AVG	14.97	30.00	-15.03	-7.50	7.47	36.02	-28.55
					PEAK	22.74	30.00	-7.26	-7.50	15.24	36.02	-20.78
	2457	10	52T	37	AVG	14.73	30.00	-15.27	-7.44	7.29	36.02	-28.73
					PEAK	21.84	30.00	-8.16	-7.44	14.40	36.02	-21.62
				38	AVG	14.70	30.00	-15.30	-7.44	7.26	36.02	-28.76
					PEAK	21.53	30.00	-8.47	-7.44	14.09	36.02	-21.93
				40	AVG	14.54	30.00	-15.46	-7.44	7.10	36.02	-28.92
					PEAK	21.53	30.00	-8.47	-7.44	14.09	36.02	-21.93
	2462	11	52T	37	AVG	14.61	30.00	-15.39	-7.44	7.17	36.02	-28.85
					PEAK	22.04	30.00	-7.96	-7.44	14.60	36.02	-21.42
				38	AVG	14.53	30.00	-15.47	-7.44	7.09	36.02	-28.93
					PEAK	21.78	30.00	-8.22	-7.44	14.34	36.02	-21.68
				40	AVG	14.59	30.00	-15.41	-7.44	7.15	36.02	-28.87
					PEAK	21.77	30.00	-8.23	-7.44	14.33	36.02	-21.69
	2467	12	52T	37	AVG	14.93	30.00	-15.07	-7.44	7.49	36.02	-28.53
					PEAK	21.80	30.00	-8.20	-7.44	14.36	36.02	-21.66
				38	AVG	14.71	30.00	-15.29	-7.44	7.27	36.02	-28.75
					PEAK	21.76	30.00	-8.24	-7.44	14.32	36.02	-21.70
				40	AVG	14.23	30.00	-15.77	-7.44	6.79	36.02	-29.23
					PEAK	21.33	30.00	-8.67	-7.44	13.89	36.02	-22.13
	2472	13	52T	37	AVG	-1.76	30.00	-31.76	-7.83	-9.59	36.02	-45.61
					PEAK	6.16	30.00	-23.84	-7.83	-1.67	36.02	-37.69
				38	AVG	-1.56	30.00	-31.56	-7.83	-9.39	36.02	-45.41
					PEAK	6.29	30.00	-23.71	-7.83	-1.54	36.02	-37.56
				40	AVG	-1.64	30.00	-31.64	-7.83	-9.47	36.02	-45.49
					PEAK	6.45	30.00	-23.55	-7.83	-1.38	36.02	-37.40

Table 7-5. Conducted Output Power Measurements SISO ANT1 (52 Tones)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset			Page 24 of 115

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	106T	53	AVG	15.79	30.00	-14.21	-7.50	8.29	36.02	-27.73
					PEAK	23.23	30.00	-6.77	-7.50	15.73	36.02	-20.29
				54	AVG	15.64	30.00	-14.36	-7.50	8.14	36.02	-27.88
					PEAK	23.17	30.00	-6.83	-7.50	15.67	36.02	-20.35
	2417	2	106T	53	AVG	15.38	30.00	-14.62	-7.50	7.88	36.02	-28.14
					PEAK	22.01	30.00	-7.99	-7.50	14.51	36.02	-21.51
				54	AVG	15.38	30.00	-14.62	-7.50	7.88	36.02	-28.14
					PEAK	22.05	30.00	-7.95	-7.50	14.55	36.02	-21.47
	2422	3	106T	53	AVG	15.41	30.00	-14.59	-7.50	7.91	36.02	-28.11
					PEAK	21.90	30.00	-8.10	-7.50	14.40	36.02	-21.62
				54	AVG	15.92	30.00	-14.08	-7.50	8.42	36.02	-27.60
					PEAK	22.45	30.00	-7.55	-7.50	14.95	36.02	-21.07
	2437	6	106T	53	AVG	15.72	30.00	-14.28	-7.50	8.22	36.02	-27.80
					PEAK	23.17	30.00	-6.83	-7.50	15.67	36.02	-20.35
				54	AVG	15.87	30.00	-14.13	-7.50	8.37	36.02	-27.65
					PEAK	23.31	30.00	-6.69	-7.50	15.81	36.02	-20.21
	2457	10	106T	53	AVG	15.20	30.00	-14.80	-7.44	7.76	36.02	-28.26
					PEAK	21.98	30.00	-8.02	-7.44	14.54	36.02	-21.48
				54	AVG	15.91	30.00	-14.09	-7.44	8.47	36.02	-27.55
					PEAK	22.48	30.00	-7.52	-7.44	15.04	36.02	-20.98
	2462	11	106T	53	AVG	15.98	30.00	-14.02	-7.44	8.54	36.02	-27.48
					PEAK	22.87	30.00	-7.13	-7.44	15.43	36.02	-20.59
				54	AVG	15.90	30.00	-14.10	-7.44	8.46	36.02	-27.56
					PEAK	22.94	30.00	-7.06	-7.44	15.50	36.02	-20.52
	2467	12	106T	53	AVG	15.40	30.00	-14.60	-7.44	7.96	36.02	-28.06
					PEAK	22.05	30.00	-7.95	-7.44	14.61	36.02	-21.41
				54	AVG	15.54	30.00	-14.46	-7.44	8.10	36.02	-27.92
					PEAK	21.93	30.00	-8.07	-7.44	14.49	36.02	-21.53
	2472	13	106T	53	AVG	2.31	30.00	-27.69	-7.83	-5.52	36.02	-41.54
					PEAK	10.19	30.00	-19.81	-7.83	2.36	36.02	-33.66
				54	AVG	2.09	30.00	-27.91	-7.83	-5.74	36.02	-41.76
					PEAK	9.83	30.00	-20.17	-7.83	2.00	36.02	-34.02

Table 7-6. Conducted Output Power Measurements SISO ANT1 (106 Tones)

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	242T	61	AVG	11.46	30.00	-18.54	-7.50	3.96	36.02	-32.06
					PEAK	19.04	30.00	-10.96	-7.50	11.54	36.02	-24.48
	2417	2	242T	61	AVG	13.51	30.00	-16.49	-7.50	6.01	36.02	-30.01
					PEAK	20.72	30.00	-9.28	-7.50	13.22	36.02	-22.80
	2422	3	242T	61	AVG	15.85	30.00	-14.15	-7.50	8.35	36.02	-27.67
					PEAK	22.03	30.00	-7.97	-7.50	14.53	36.02	-21.49
	2437	6	242T	61	AVG	16.58	30.00	-13.42	-7.50	9.08	36.02	-26.94
					PEAK	23.48	30.00	-6.52	-7.50	15.98	36.02	-20.04
	2457	10	242T	61	AVG	14.89	30.00	-15.11	-7.44	7.45	36.02	-28.57
					PEAK	21.83	30.00	-8.17	-7.44	14.39	36.02	-21.63
	2462	11	242T	61	AVG	11.95	30.00	-18.05	-7.44	4.51	36.02	-31.51
					PEAK	19.35	30.00	-10.65	-7.44	11.91	36.02	-24.11
	2467	12	242T	61	AVG	11.37	30.00	-18.63	-7.44	3.93	36.02	-32.09
					PEAK	19.00	30.00	-11.00	-7.44	11.56	36.02	-24.46
	2472	13	242T	61	AVG	5.73	30.00	-24.27	-7.83	-2.10	36.02	-38.12
					PEAK	13.35	30.00	-16.65	-7.83	5.52	36.02	-30.50

Table 7-7. Conducted Output Power Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset			Page 25 of 115

Antenna-2

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	26T	0	AVG	13.73	30.00	-16.27	-6.68	7.05	36.02	-28.97
					PEAK	21.38	30.00	-8.62	-6.68	14.70	36.02	-21.32
				4	AVG	13.64	30.00	-16.36	-6.68	6.96	36.02	-29.06
					PEAK	21.01	30.00	-8.99	-6.68	14.33	36.02	-21.69
				8	AVG	13.98	30.00	-16.02	-6.68	7.30	36.02	-28.72
					PEAK	21.43	30.00	-8.57	-6.68	14.75	36.02	-21.27
	2437	6	26T	0	AVG	13.97	30.00	-16.03	-6.68	7.29	36.02	-28.73
					PEAK	21.39	30.00	-8.61	-6.68	14.71	36.02	-21.31
				4	AVG	13.79	30.00	-16.21	-6.68	7.11	36.02	-28.91
					PEAK	21.22	30.00	-8.78	-6.68	14.54	36.02	-21.48
				8	AVG	13.78	30.00	-16.22	-6.68	7.10	36.02	-28.92
					PEAK	21.08	30.00	-8.92	-6.68	14.40	36.02	-21.62
	2462	11	26T	0	AVG	13.78	30.00	-16.22	-6.75	7.03	36.02	-28.99
					PEAK	21.23	30.00	-8.77	-6.75	14.48	36.02	-21.54
				4	AVG	13.97	30.00	-16.03	-6.75	7.22	36.02	-28.80
					PEAK	21.48	30.00	-8.52	-6.75	14.73	36.02	-21.29
				8	AVG	13.91	30.00	-16.09	-6.75	7.16	36.02	-28.86
					PEAK	21.14	30.00	-8.86	-6.75	14.39	36.02	-21.63
	2467	12	26T	0	AVG	13.70	30.00	-16.30	-6.75	6.95	36.02	-29.07
					PEAK	20.88	30.00	-9.12	-6.75	14.13	36.02	-21.89
				4	AVG	13.98	30.00	-16.02	-6.75	7.23	36.02	-28.79
					PEAK	21.68	30.00	-8.32	-6.75	14.93	36.02	-21.09
				8	AVG	13.52	30.00	-16.48	-6.75	6.77	36.02	-29.25
					PEAK	20.75	30.00	-9.25	-6.75	14.00	36.02	-22.02
	2472	13	26T	0	AVG	4.41	30.00	-25.59	-7.52	-3.11	36.02	-39.13
					PEAK	11.98	30.00	-18.02	-7.52	4.46	36.02	-31.56
				4	AVG	4.22	30.00	-25.78	-7.52	-3.30	36.02	-39.32
					PEAK	11.89	30.00	-18.11	-7.52	4.37	36.02	-31.65
				8	AVG	4.23	30.00	-25.77	-7.52	-3.29	36.02	-39.31
					PEAK	11.90	30.00	-18.10	-7.52	4.38	36.02	-31.64

Table 7-8. Conducted Output Power Measurements SISO ANT2 (26 Tones)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 26 of 115

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2412	1	52T	37	AVG	14.91	30.00	-15.09	-6.68	8.23	36.02	-27.79
					PEAK	22.57	30.00	-7.43	-6.68	15.89	36.02	-20.13
				38	AVG	14.93	30.00	-15.07	-6.68	8.25	36.02	-27.77
					PEAK	22.67	30.00	-7.33	-6.68	15.99	36.02	-20.03
				40	AVG	14.79	30.00	-15.21	-6.68	8.11	36.02	-27.91
					PEAK	22.46	30.00	-7.54	-6.68	15.78	36.02	-20.24
	2437	6	52T	37	AVG	14.75	30.00	-15.25	-6.68	8.07	36.02	-27.95
					PEAK	22.57	30.00	-7.43	-6.68	15.89	36.02	-20.13
				38	AVG	14.89	30.00	-15.11	-6.68	8.21	36.02	-27.81
					PEAK	22.59	30.00	-7.41	-6.68	15.91	36.02	-20.11
				40	AVG	14.98	30.00	-15.02	-6.68	8.30	36.02	-27.72
					PEAK	22.62	30.00	-7.38	-6.68	15.94	36.02	-20.08
	2462	11	52T	37	AVG	14.91	30.00	-15.09	-6.75	8.16	36.02	-27.86
					PEAK	22.45	30.00	-7.55	-6.75	15.70	36.02	-20.32
				38	AVG	14.63	30.00	-15.37	-6.75	7.88	36.02	-28.14
					PEAK	22.09	30.00	-7.91	-6.75	15.34	36.02	-20.68
				40	AVG	14.76	30.00	-15.24	-6.75	8.01	36.02	-28.01
					PEAK	22.28	30.00	-7.72	-6.75	15.53	36.02	-20.49
	2467	12	52T	37	AVG	14.83	30.00	-15.17	-6.75	8.08	36.02	-27.94
					PEAK	22.58	30.00	-7.42	-6.75	15.83	36.02	-20.19
				38	AVG	14.74	30.00	-15.26	-6.75	7.99	36.02	-28.03
					PEAK	22.19	30.00	-7.81	-6.75	15.44	36.02	-20.58
				40	AVG	14.80	30.00	-15.20	-6.75	8.05	36.02	-27.97
					PEAK	22.16	30.00	-7.84	-6.75	15.41	36.02	-20.61
	2472	13	52T	37	AVG	5.92	30.00	-24.08	-7.52	-1.60	36.02	-37.62
					PEAK	13.65	30.00	-16.35	-7.52	6.13	36.02	-29.89
				38	AVG	5.98	30.00	-24.02	-7.52	-1.54	36.02	-37.56
					PEAK	13.64	30.00	-16.36	-7.52	6.12	36.02	-29.90
				40	AVG	5.52	30.00	-24.48	-7.52	-2.00	36.02	-38.02
					PEAK	13.29	30.00	-16.71	-7.52	5.77	36.02	-30.25

Table 7-9. Conducted Output Power Measurements SISO ANT2 (52 Tones)

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2412	1	106T	53	AVG	15.95	30.00	-14.05	-6.68	9.27	36.02	-26.75
					PEAK	23.74	30.00	-6.26	-6.68	17.06	36.02	-18.96
				54	AVG	15.97	30.00	-14.03	-6.68	9.29	36.02	-26.73
					PEAK	23.68	30.00	-6.32	-6.68	17.00	36.02	-19.02
	2437	6	106T	53	AVG	15.89	30.00	-14.11	-6.68	9.21	36.02	-26.81
					PEAK	23.53	30.00	-6.47	-6.68	16.85	36.02	-19.17
				54	AVG	15.77	30.00	-14.23	-6.68	9.09	36.02	-26.93
					PEAK	23.09	30.00	-6.91	-6.68	16.41	36.02	-19.61
	2462	11	106T	53	AVG	15.98	30.00	-14.02	-6.75	9.23	36.02	-26.79
					PEAK	23.39	30.00	-6.61	-6.75	16.64	36.02	-19.38
				54	AVG	15.92	30.00	-14.08	-6.75	9.17	36.02	-26.85
					PEAK	23.12	30.00	-6.88	-6.75	16.37	36.02	-19.65
	2467	12	106T	53	AVG	15.91	30.00	-14.09	-6.75	9.16	36.02	-26.86
					PEAK	23.30	30.00	-6.70	-6.75	16.55	36.02	-19.47
				54	AVG	15.88	30.00	-14.12	-6.75	9.13	36.02	-26.89
					PEAK	22.83	30.00	-7.17	-6.75	16.08	36.02	-19.94
	2472	13	106T	53	AVG	9.46	30.00	-20.54	-7.52	1.94	36.02	-34.08
					PEAK	17.24	30.00	-12.76	-7.52	9.72	36.02	-26.30
				54	AVG	9.02	30.00	-20.98	-7.52	1.50	36.02	-34.52
					PEAK	16.79	30.00	-13.21	-7.52	9.27	36.02	-26.75

Table 7-10. Conducted Output Power Measurements SISO ANT2 (106 Tones)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset			Page 27 of 115

2.4GHZ	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	242T	61	AVG	15.49	30.00	-14.51	-6.68	8.81	36.02	-27.21
					PEAK	22.98	30.00	-7.02	-6.68	16.30	36.02	-19.72
	2437	6	242T	61	AVG	16.91	30.00	-13.09	-6.68	10.23	36.02	-25.79
					PEAK	24.11	30.00	-5.89	-6.68	17.43	36.02	-18.59
	2462	11	242T	61	AVG	15.99	30.00	-14.01	-6.75	9.24	36.02	-26.78
					PEAK	23.26	30.00	-6.74	-6.75	16.51	36.02	-19.51
	2467	12	242T	61	AVG	13.24	30.00	-16.76	-6.75	6.49	36.02	-29.53
					PEAK	20.65	30.00	-9.35	-6.75	13.90	36.02	-22.12
	2472	13	242T	61	AVG	13.16	30.00	-16.84	-7.52	5.64	36.02	-30.38
					PEAK	20.68	30.00	-9.32	-7.52	13.16	36.02	-22.86

Table 7-11. Conducted Output Power Measurements SISO ANT2 (242 Tones)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
			Page 28 of 115

MIMO

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						ANT1	ANT2	MIMO						
2.4GHz	2412	1	26T	0	AVG	11.16	10.59	13.89	30.00	-16.11	-4.07	9.82	36.02	-26.20
					PEAK	18.61	17.90	21.28	30.00	-8.72	-4.07	17.21	36.02	-18.81
					AVG	11.47	10.27	13.92	30.00	-16.08	-4.07	9.85	36.02	-26.17
				4	PEAK	18.90	17.96	21.47	30.00	-8.53	-4.07	17.40	36.02	-18.62
					AVG	10.76	10.07	13.44	30.00	-16.56	-4.07	9.37	36.02	-26.65
					PEAK	18.30	17.65	21.00	30.00	-9.00	-4.07	16.93	36.02	-19.09
	2437	6	26T	0	AVG	11.02	10.84	13.94	30.00	-16.06	-4.07	9.87	36.02	-26.15
					PEAK	18.65	18.42	21.55	30.00	-8.45	-4.07	17.48	36.02	-18.54
					AVG	10.30	10.81	13.57	30.00	-16.43	-4.07	9.50	36.02	-26.52
				4	PEAK	17.70	18.23	20.98	30.00	-9.02	-4.07	16.91	36.02	-19.11
					AVG	9.75	11.60	13.78	30.00	-16.22	-4.07	9.71	36.02	-26.31
					PEAK	17.31	18.95	21.22	30.00	-8.78	-4.07	17.15	36.02	-18.87
	2462	11	26T	0	AVG	10.08	10.91	13.53	30.00	-16.47	-4.08	9.45	36.02	-26.57
					PEAK	17.69	19.37	21.62	30.00	-8.38	-4.08	17.54	36.02	-18.48
					AVG	10.55	10.58	13.58	30.00	-16.42	-4.08	9.50	36.02	-26.52
				4	PEAK	17.45	18.39	20.96	30.00	-9.04	-4.08	16.88	36.02	-19.14
					AVG	10.94	10.40	13.69	30.00	-16.31	-4.08	9.61	36.02	-26.41
					PEAK	18.19	17.97	21.09	30.00	-8.91	-4.08	17.01	36.02	-19.01
	2467	12	26T	0	AVG	6.07	7.64	9.94	30.00	-20.06	-4.08	5.86	36.02	-30.16
					PEAK	13.76	15.22	17.56	30.00	-12.44	-4.08	13.48	36.02	-22.54
					AVG	6.52	6.70	9.62	30.00	-20.38	-4.08	5.54	36.02	-30.48
				4	PEAK	13.95	14.45	17.22	30.00	-12.78	-4.08	13.14	36.02	-22.88
					AVG	6.12	7.05	9.62	30.00	-20.38	-4.08	5.54	36.02	-30.48
					PEAK	13.95	14.86	17.44	30.00	-12.56	-4.08	13.36	36.02	-22.66
	2472	13	26T	0	AVG	-0.44	0.16	2.88	30.00	-27.12	-4.66	-1.78	36.02	-37.80
					PEAK	7.21	7.82	10.54	30.00	-19.46	-4.66	5.87	36.02	-30.15
					AVG	0.07	-0.18	2.96	30.00	-27.04	-4.66	-1.71	36.02	-37.73
				4	PEAK	7.77	7.66	10.73	30.00	-19.27	-4.66	6.06	36.02	-29.96
					AVG	-1.14	-0.20	2.37	30.00	-27.63	-4.66	-2.30	36.02	-38.32
					PEAK	6.60	7.57	10.12	30.00	-19.88	-4.66	5.46	36.02	-30.56

Table 7-12. Conducted Output Power Measurements MIMO (26 Tones)

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						ANT1	ANT2	MIMO						
2.4GHz	2412	1	52T	37	AVG	12.57	11.22	14.96	30.00	-15.04	-4.07	10.89	36.02	-25.13
					PEAK	19.89	18.96	22.46	30.00	-7.54	-4.07	18.39	36.02	-17.63
					AVG	12.36	10.86	14.68	30.00	-15.32	-4.07	10.61	36.02	-25.41
				38	PEAK	20.01	18.56	22.36	30.00	-7.64	-4.07	18.29	36.02	-17.74
					AVG	11.73	11.40	14.58	30.00	-15.42	-4.07	10.51	36.02	-25.51
					PEAK	19.74	19.16	22.47	30.00	-7.53	-4.07	18.40	36.02	-17.62
				40	AVG	11.93	11.04	14.52	30.00	-15.48	-4.07	10.45	36.02	-25.57
					PEAK	19.64	19.00	22.34	30.00	-7.66	-4.07	18.27	36.02	-17.75
					AVG	12.17	11.40	14.81	30.00	-15.19	-4.07	10.74	36.02	-25.28
				38	PEAK	20.00	19.32	22.68	30.00	-7.32	-4.07	18.61	36.02	-17.41
					AVG	11.33	11.55	14.45	30.00	-15.55	-4.07	10.38	36.02	-25.64
					PEAK	18.86	19.26	22.07	30.00	-7.93	-4.07	18.00	36.02	-18.02
	2437	6	52T	37	AVG	10.67	11.97	14.38	30.00	-15.62	-4.08	10.30	36.02	-25.72
					PEAK	18.42	19.54	22.03	30.00	-7.97	-4.08	17.95	36.02	-18.07
					AVG	11.83	12.05	14.95	30.00	-15.05	-4.08	10.87	36.02	-25.15
				38	PEAK	18.34	19.64	22.05	30.00	-7.95	-4.08	17.97	36.02	-18.05
					AVG	11.80	12.08	14.95	30.00	-15.05	-4.08	10.87	36.02	-25.15
					PEAK	19.40	19.51	22.47	30.00	-7.53	-4.08	18.39	36.02	-17.63
				40	AVG	7.27	8.81	11.12	30.00	-18.88	-4.08	7.04	36.02	-28.98
					PEAK	14.89	16.58	18.83	30.00	-11.17	-4.08	14.75	36.02	-21.27
					AVG	7.98	8.54	11.28	30.00	-18.72	-4.08	7.20	36.02	-28.82
				38	PEAK	15.48	16.23	18.88	30.00	-11.12	-4.08	14.80	36.02	-21.22
					AVG	8.08	8.02	11.06	30.00	-18.94	-4.08	6.98	36.02	-29.04
					PEAK	15.55	16.06	18.82	30.00	-11.18	-4.08	14.74	36.02	-21.28
	2462	11	52T	37	AVG	2.18	1.69	4.95	30.00	-25.05	-4.66	0.29	36.02	-35.73
					PEAK	9.91	9.54	12.74	30.00	-17.26	-4.66	8.08	36.02	-27.94
					AVG	2.32	1.43	4.91	30.00	-25.09	-4.66	0.24	36.02	-35.78
				38	PEAK	10.08	9.33	12.73	30.00	-17.27	-4.66	8.07	36.02	-27.95
					AVG	1.30	2.02	4.69	30.00	-25.31	-4.66	0.02	36.02	-36.00
					PEAK	9.13	9.60	12.38	30.00	-17.62	-4.66	7.72	36.02	-28.30

Table 7-13. Conducted Output Power Measurements MIMO (52 Tones)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 29 of 115

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						ANT1	ANT2	MIMO						
						AVG	ANT2	MIMO						
2.4GHz	2412	1	106T	53	AVG	13.04	12.40	15.74	30.00	-14.26	-4.07	11.67	36.02	-24.35
					PEAK	20.38	20.01	23.21	30.00	-6.79	-4.07	19.14	36.02	-16.88
				54	AVG	13.40	12.49	15.98	30.00	-14.02	-4.07	11.91	36.02	-24.11
					PEAK	20.88	20.27	23.60	30.00	-6.40	-4.07	19.53	36.02	-16.49
	2437	6	106T	53	AVG	12.46	13.02	15.76	30.00	-14.24	-4.07	11.69	36.02	-24.33
					PEAK	20.20	21.17	23.72	30.00	-6.28	-4.07	19.65	36.02	-16.37
				54	AVG	12.15	13.28	15.76	30.00	-14.24	-4.07	11.69	36.02	-24.33
					PEAK	19.85	21.21	23.59	30.00	-6.41	-4.07	19.52	36.02	-16.50
	2462	11	106T	53	AVG	11.67	13.25	15.54	30.00	-14.46	-4.08	11.46	36.02	-24.56
					PEAK	19.22	20.75	23.06	30.00	-6.94	-4.08	18.98	36.02	-17.04
				54	AVG	12.24	13.25	15.78	30.00	-14.22	-4.08	11.71	36.02	-24.31
					PEAK	20.04	20.98	23.55	30.00	-6.45	-4.08	19.47	36.02	-16.55
	2467	12	106T	53	AVG	9.64	10.50	13.10	30.00	-16.90	-4.08	9.02	36.02	-27.00
					PEAK	16.83	18.33	20.65	30.00	-9.35	-4.08	16.58	36.02	-19.44
				54	AVG	9.94	11.06	13.55	30.00	-16.45	-4.08	9.47	36.02	-26.55
					PEAK	17.45	18.70	21.13	30.00	-8.87	-4.08	17.05	36.02	-18.97
	2472	13	106T	53	AVG	4.91	5.02	7.98	30.00	-22.02	-4.66	3.31	36.02	-32.71
					PEAK	12.69	13.01	15.86	30.00	-14.14	-4.66	11.20	36.02	-24.82
				54	AVG	5.14	4.56	7.87	30.00	-22.13	-4.66	3.21	36.02	-32.81
					PEAK	12.83	14.49	16.75	30.00	-13.25	-4.66	12.09	36.02	-23.93

Table 7-14. Conducted Output Power Measurements MIMO (106 Tones)

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						ANT1	ANT2	MIMO						
						AVG	ANT2	MIMO						
2.4GHz	2412	1	242T	61	AVG	11.52	13.11	15.40	30.00	-14.60	-4.07	11.33	36.02	-24.69
					PEAK	18.86	20.71	22.89	30.00	-7.11	-4.07	18.82	36.02	-17.20
					AVG	13.50	14.27	16.91	30.00	-13.09	-4.07	12.84	36.02	-23.18
					PEAK	20.90	22.11	24.56	30.00	-5.44	-4.07	20.49	36.02	-15.53
	2437	6	242T	61	AVG	11.31	13.24	15.39	30.00	-14.61	-4.08	11.31	36.02	-24.71
					PEAK	18.63	21.11	23.05	30.00	-6.95	-4.08	18.98	36.02	-17.04
					AVG	9.02	10.88	13.06	30.00	-16.94	-4.08	8.98	36.02	-27.04
					PEAK	16.88	18.39	20.71	30.00	-9.29	-4.08	16.63	36.02	-19.39
	2462	11	242T	61	AVG	9.86	10.69	13.31	30.00	-16.69	-4.66	8.64	36.02	-27.38
					PEAK	17.34	18.26	20.83	30.00	-9.17	-4.66	16.17	36.02	-19.85
	2467	12	242T	61	AVG	9.02	10.88	13.06	30.00	-16.94	-4.08	8.98	36.02	-27.04
					PEAK	16.88	18.39	20.71	30.00	-9.29	-4.08	16.63	36.02	-19.39
	2472	13	242T	61	AVG	9.86	10.69	13.31	30.00	-16.69	-4.66	8.64	36.02	-27.38
					PEAK	17.34	18.26	20.83	30.00	-9.17	-4.66	16.17	36.02	-19.85

Table 7-15. Conducted Output Power Measurements MIMO (242 Tones)

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

Assuming the average conducted output power was measured to be 11.16 dBm for Antenna-1 and 10.59 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(11.16 \text{ dBm} + 10.59 \text{ dBm}) = (13.06 \text{ mW} + 11.46 \text{ mW}) = 24.52 \text{ mW} = 13.89 \text{ dBm}$$

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 30 of 115

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r01 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 31 of 115

SISO Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	1.47	8.00	-6.53	Pass
2437	6	ax	26T	MCS0	1.26	8.00	-6.74	Pass
2462	11	ax	26T	MCS0	1.71	8.00	-6.29	Pass
2412	1	ax	242T	MCS0	0.21	8.00	-7.79	Pass
2437	6	ax	242T	MCS0	-5.63	8.00	-13.63	Pass
2462	11	ax	242T	MCS0	-9.32	8.00	-17.32	Pass

Table 7-16. Conducted Power Density Measurements SISO ANT1

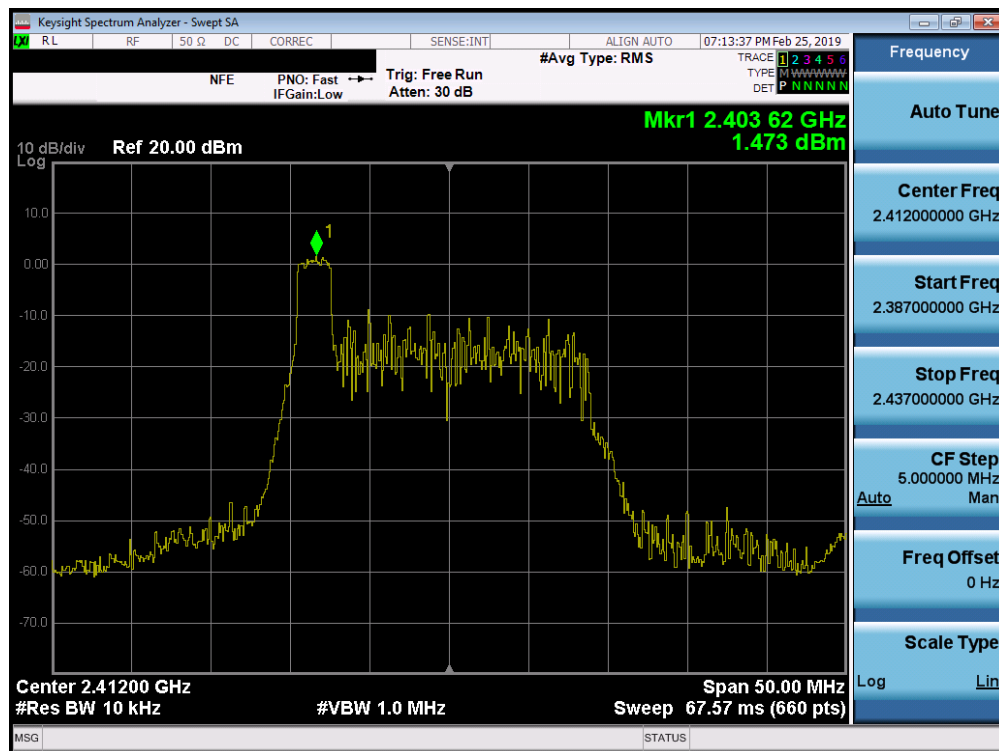


Plot 7-13. Power Spectral Density Plot SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 32 of 115

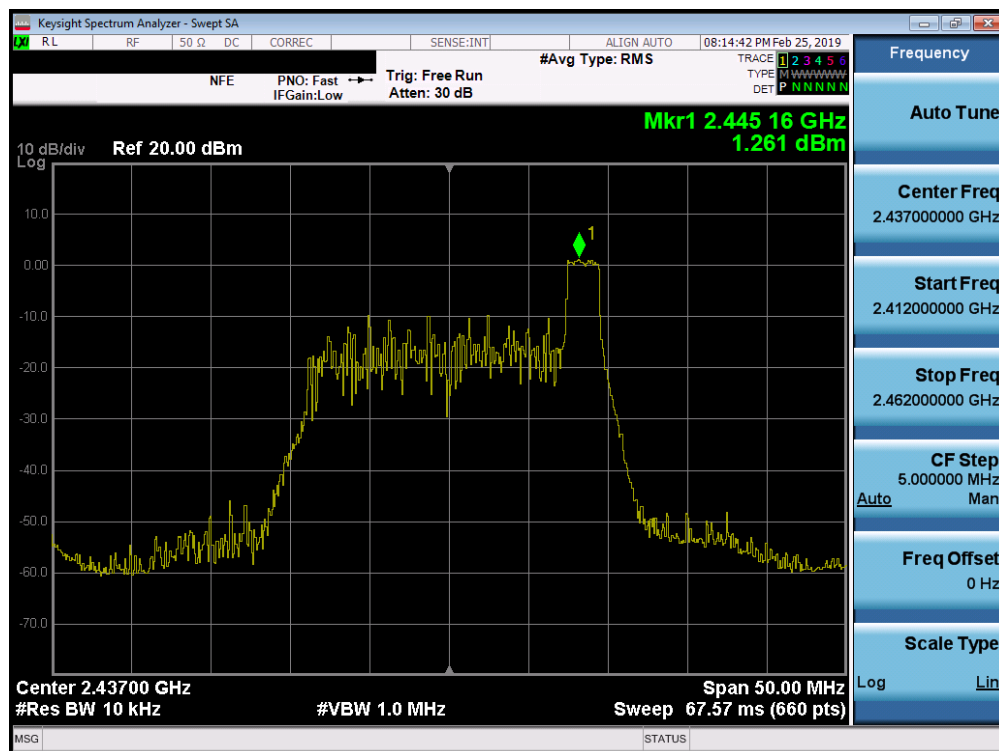


Plot 7-14. Power Spectral Density Plot SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6)

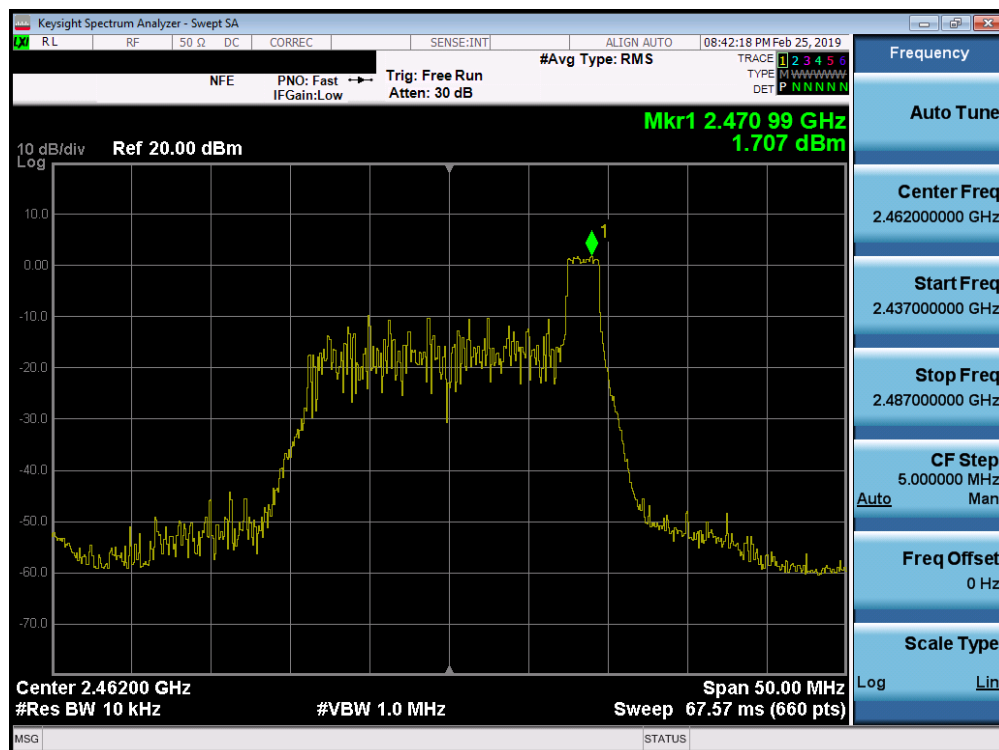


Plot 7-15. Power Spectral Density Plot SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 33 of 115

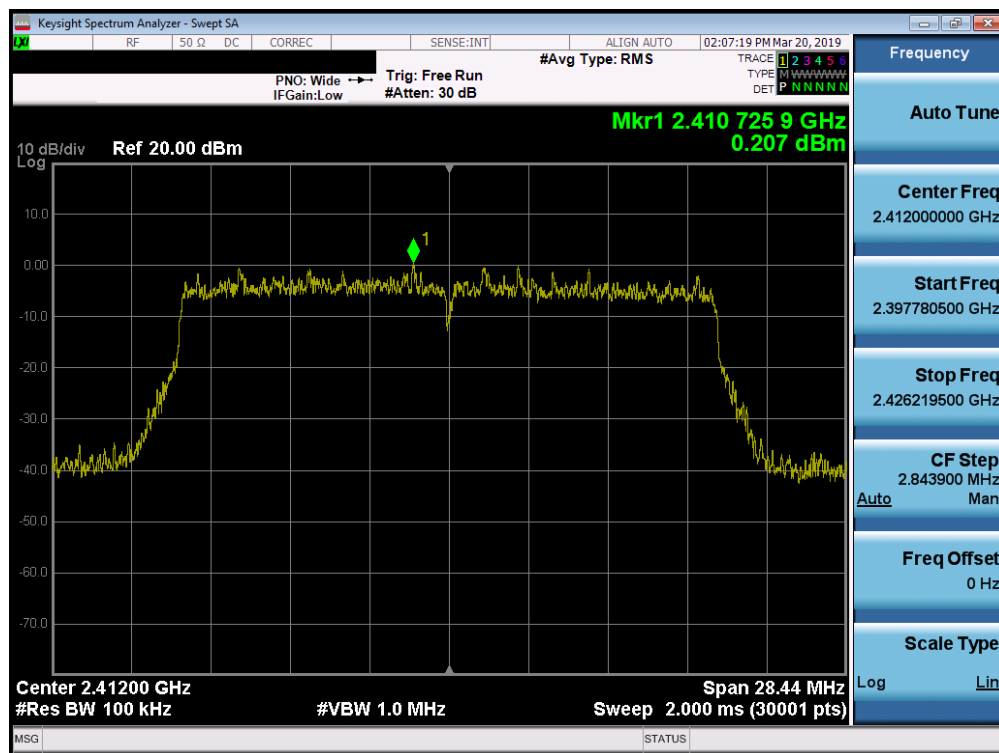


Plot 7-16. Power Spectral Density Plot SISO ANT1 (802.11ax OFDMA - 242 Tones - Ch. 1)

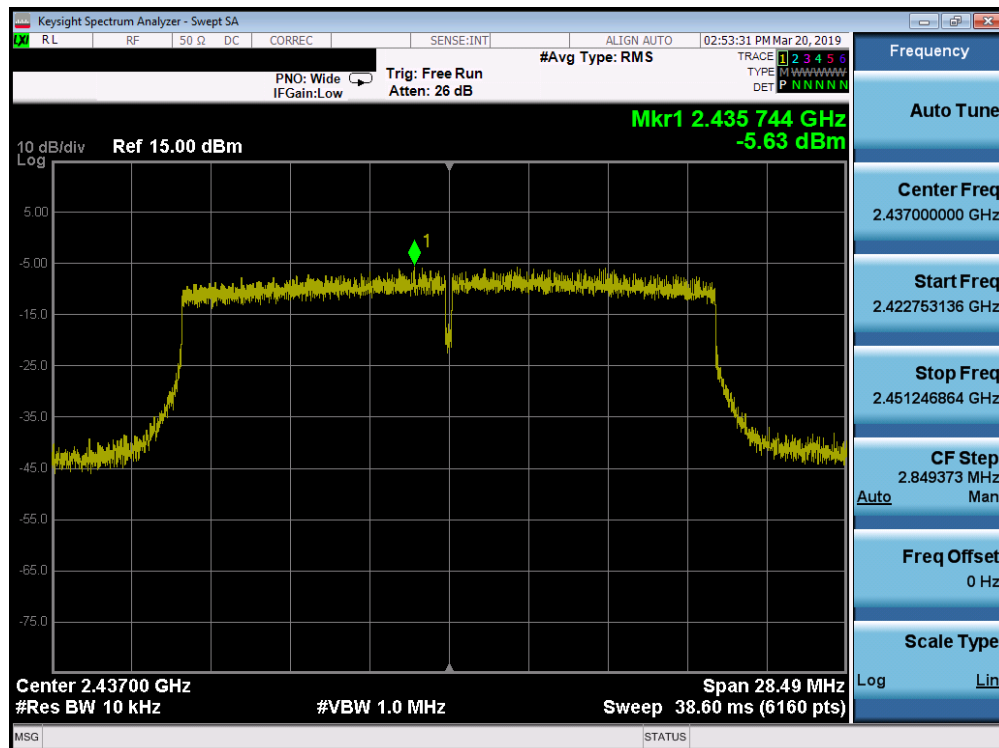

Plot 7-17. Power Spectral Density Plot SISO ANT1 (802.11ax OFDMA - 242 Tones - Ch. 6)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 34 of 115

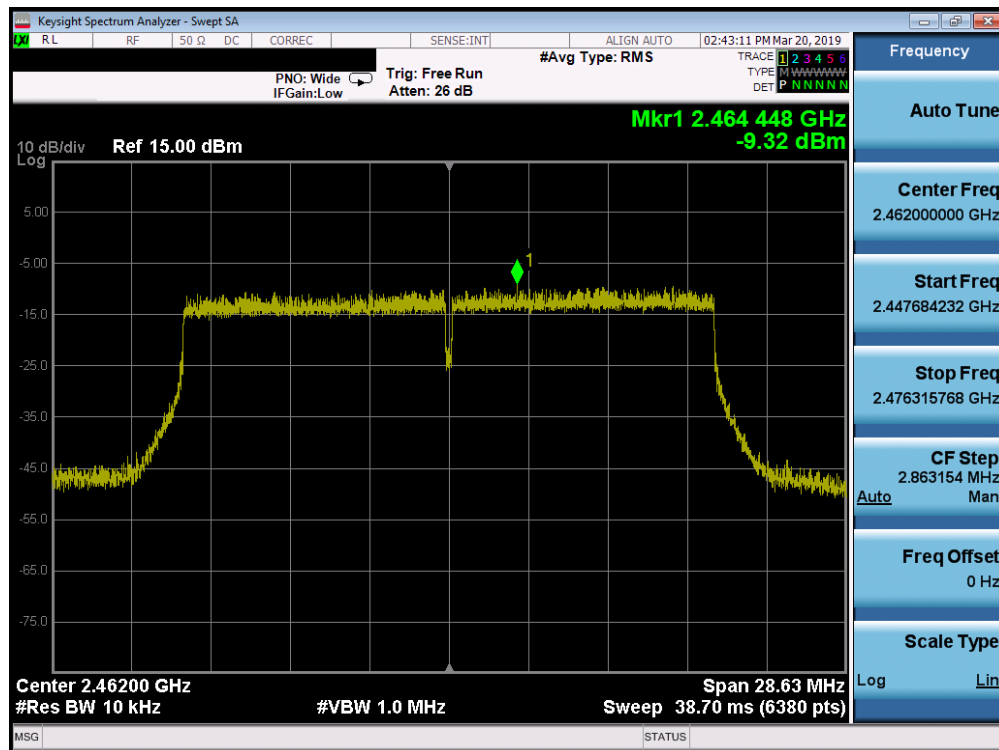


Plot 7-18. Power Spectral Density Plot SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 35 of 115

SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	0.72	8.00	-7.28	Pass
2437	6	ax	26T	MCS0	0.92	8.00	-7.08	Pass
2462	11	ax	26T	MCS0	1.29	8.00	-6.71	Pass
2412	1	ax	242T	MCS0	-5.54	8.00	-13.54	Pass
2437	6	ax	242T	MCS0	-4.44	8.00	-12.44	Pass
2462	11	ax	242T	MCS0	-5.83	8.00	-13.83	Pass

Table 7-17. Conducted Power Density Measurements SISO ANT2

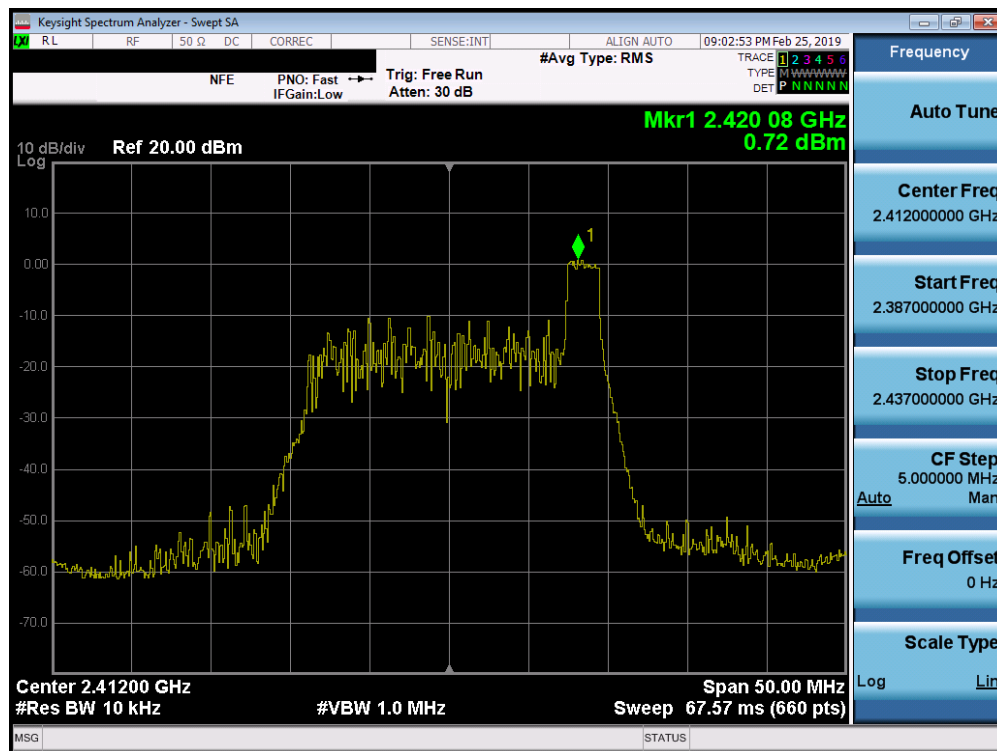


Plot 7-19. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 36 of 115

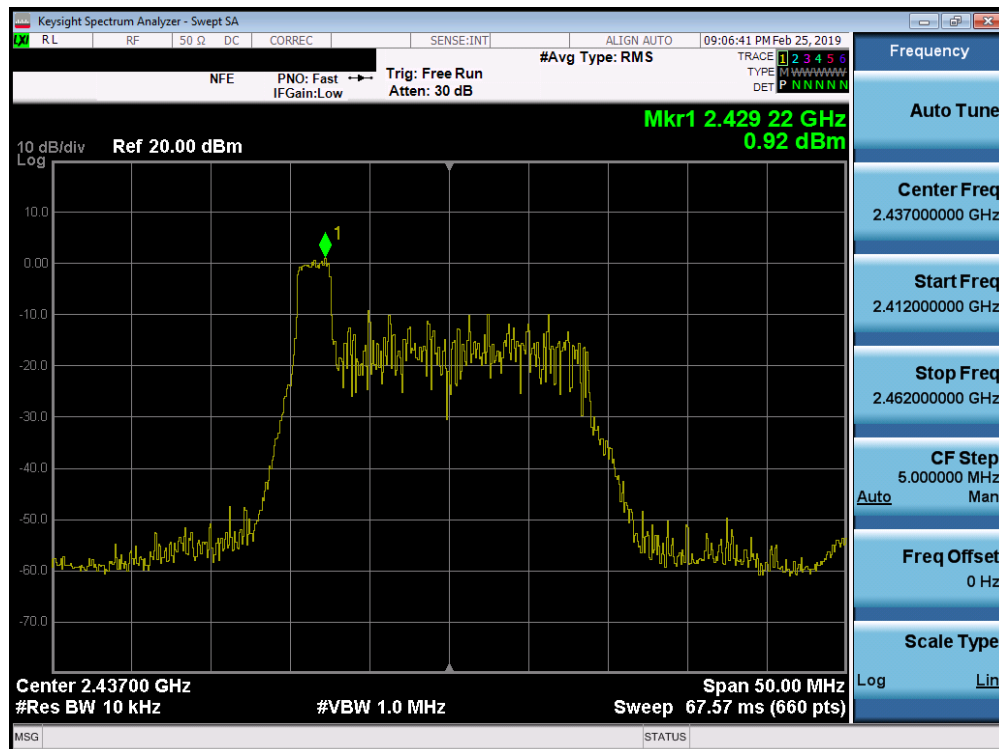


Plot 7-20. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA - 26 Tones - Ch. 6)

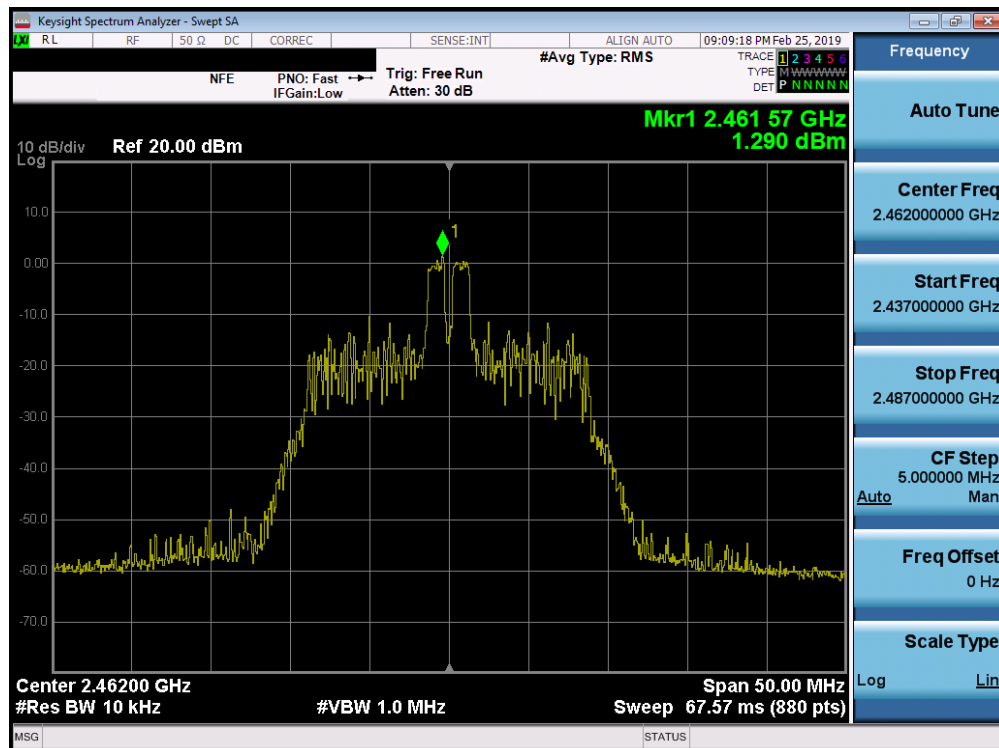


Plot 7-21. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA - 26 Tones - Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 37 of 115

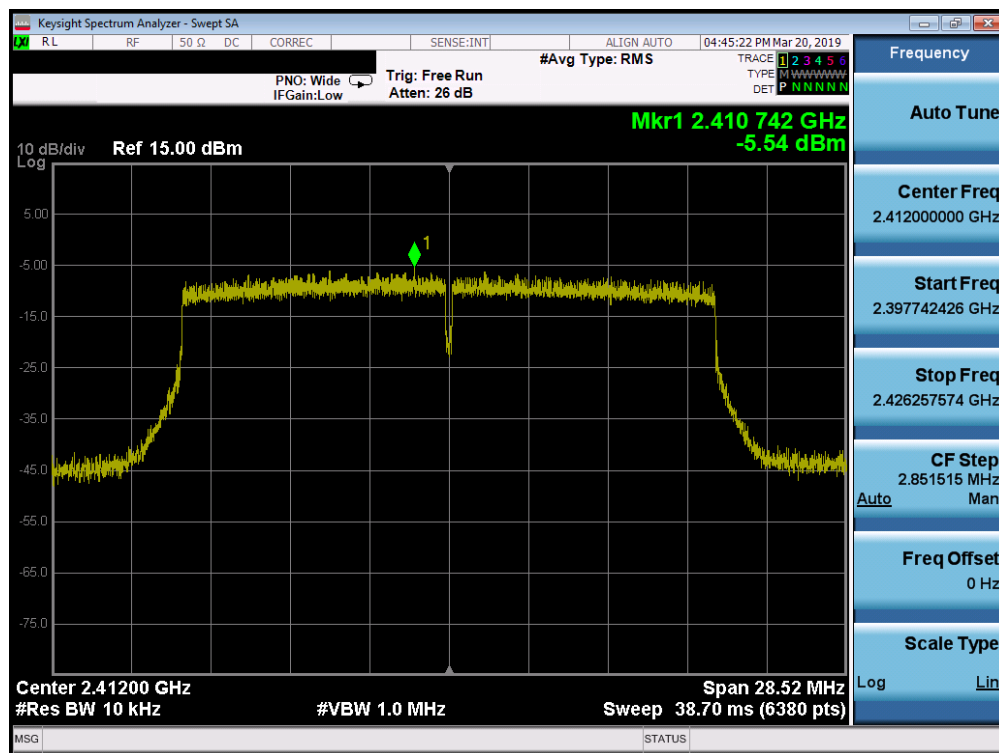


Plot 7-22. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

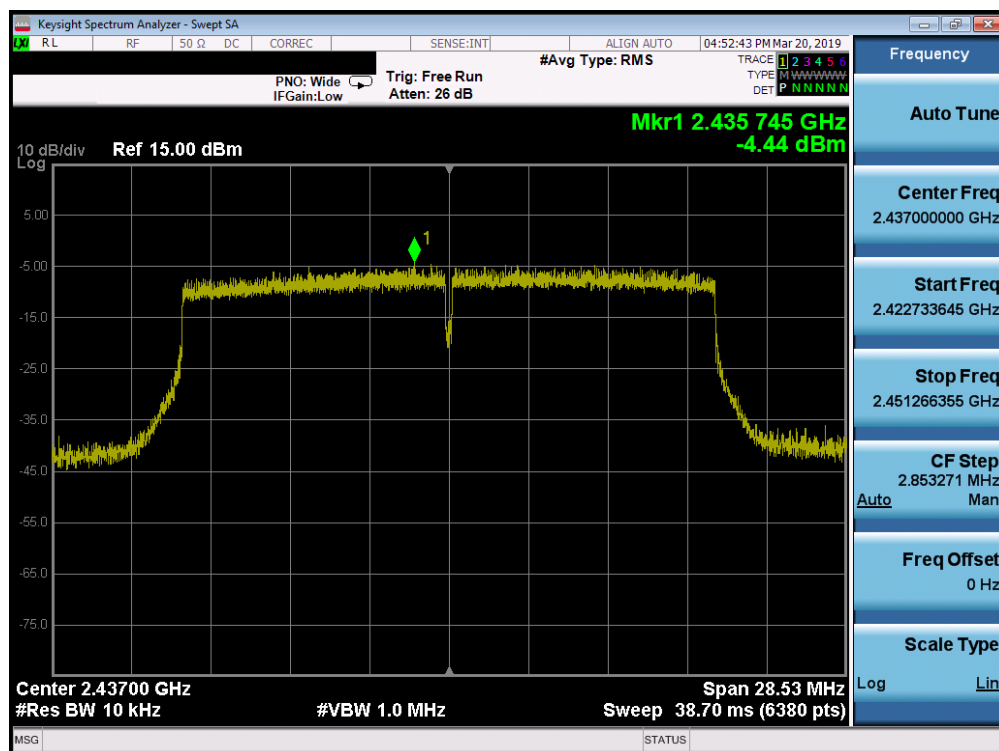

Plot 7-23. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 38 of 115

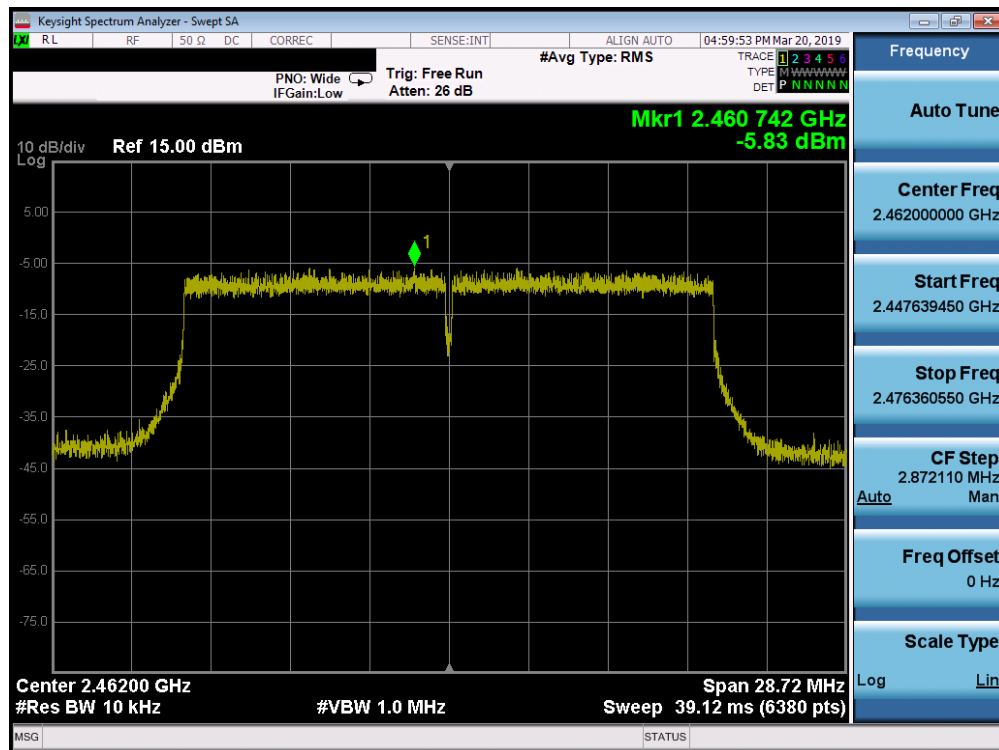

Plot 7-24. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 39 of 115

MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	1.47	0.72	4.12	8.00	-3.88	Pass
2437	6	ax	26T	MCS0	1.26	0.92	4.10	8.00	-3.90	Pass
2462	11	ax	26T	MCS0	1.71	1.29	4.51	8.00	-3.49	Pass
2412	1	ax	242T	MCS0	0.21	-5.54	1.23	8.00	-6.77	Pass
2437	6	ax	242T	MCS0	-5.63	-4.44	-1.98	8.00	-9.98	Pass
2462	11	ax	242T	MCS0	-9.32	-5.83	-4.22	8.00	-12.22	Pass

Table 7-18.MIMO Conducted Power Density Measurements

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

Assuming the average conducted power spectral density was measured to be 1.47 dBm for Antenna-1 and 0.72 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(1.47 \text{ dBm} + 0.72 \text{ dBm}) = (1.40 \text{ mW} + 1.18 \text{ mW}) = 2.58 \text{ mW} = 4.12 \text{ dBm}$$

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 40 of 115

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r01 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 41 of 115

SISO Antenna-1 Conducted Emissions at the Band Edge



Plot 7-25. Band Edge Plot SISO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 1)

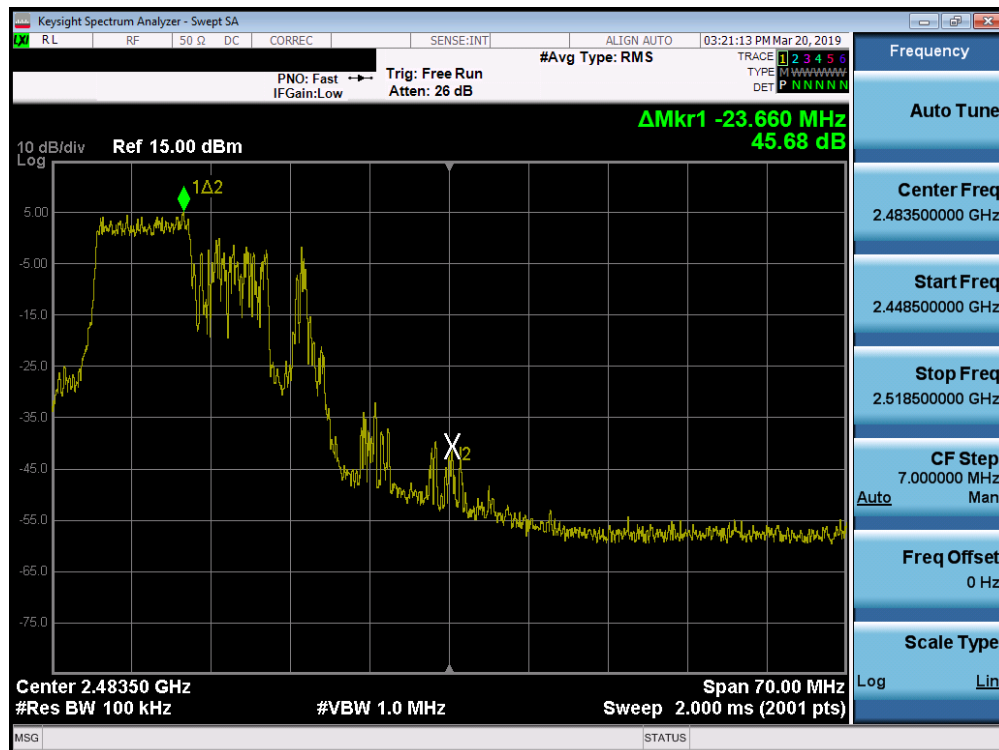

Plot 7-26. Band Edge Plot SISO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 42 of 115




Plot 7-27. Band Edge Plot SISO ANT1 (802.11ax OFDMA - 106 Tones - Ch. 12)




Plot 7-28. Band Edge Plot SISO ANT1 (802.11ax OFDMA - 106 Tones - Ch. 13)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 43 of 115

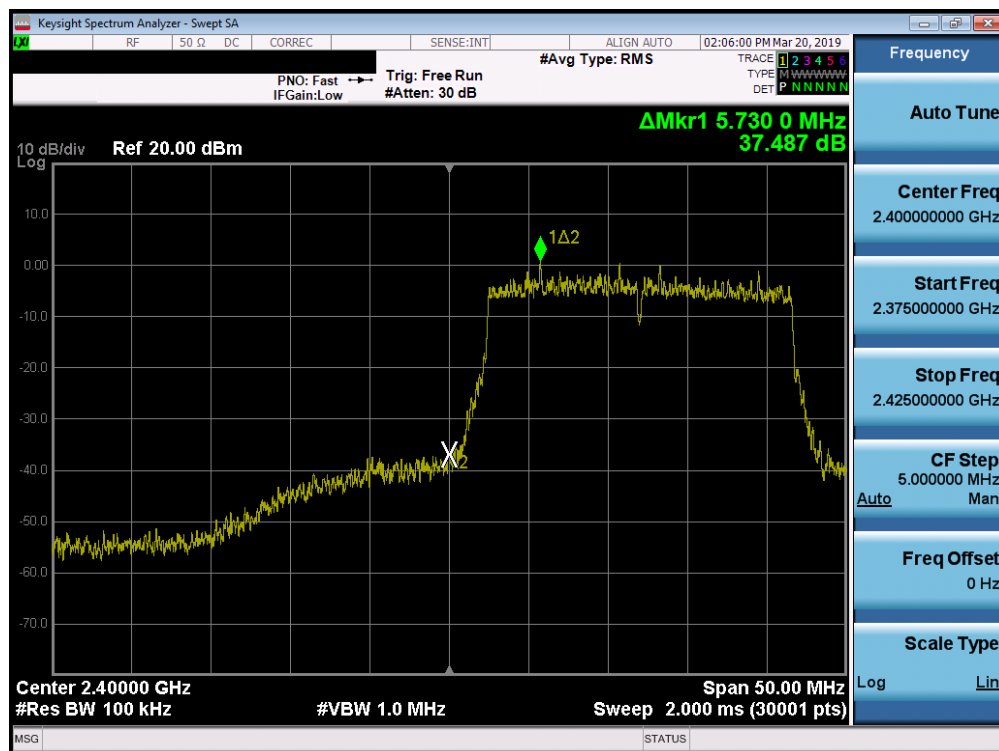


Plot 7-29. Band Edge Plot SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

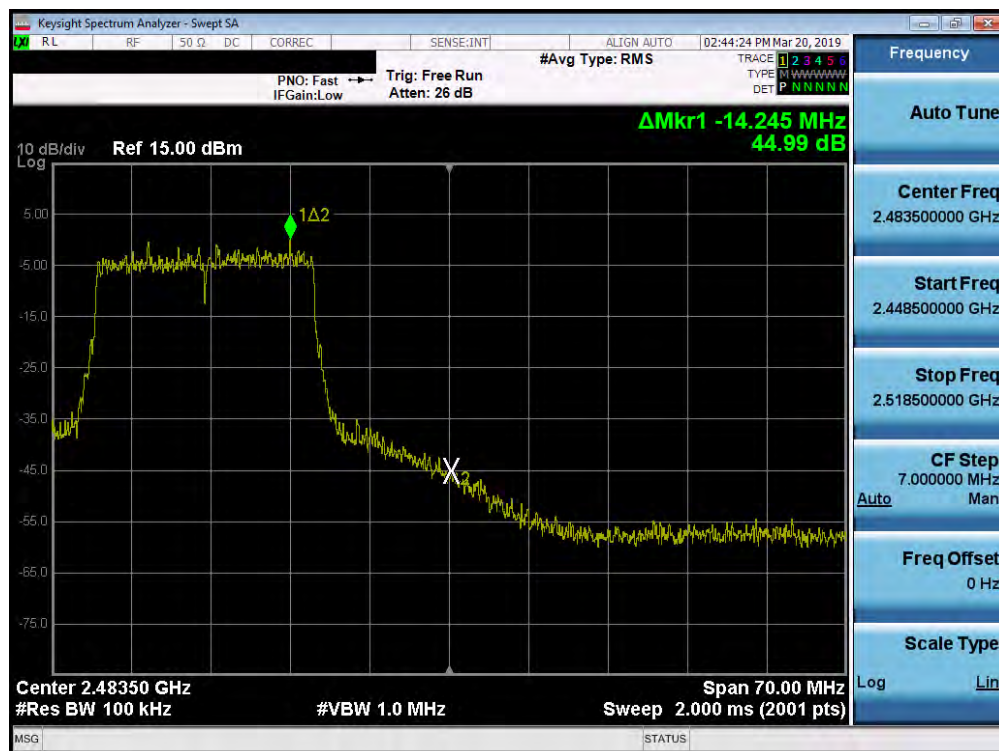


Plot 7-30. Band Edge Plot SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 44 of 115

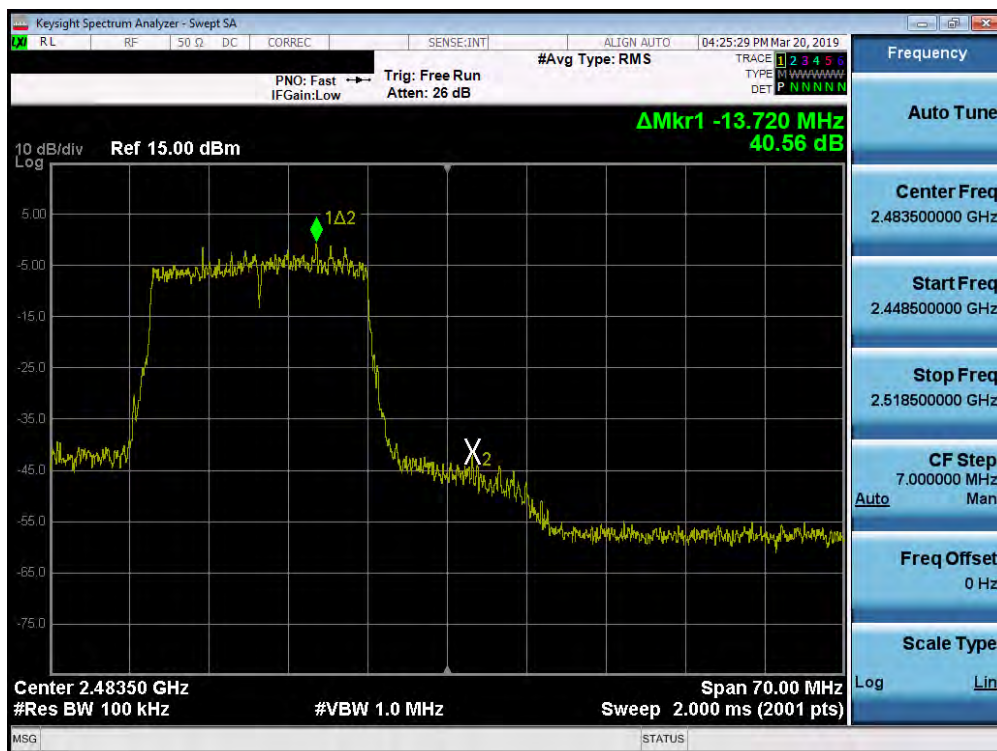

Plot 7-31. Band Edge Plot SISO ANT1 (802.11ax OFDMA - 242 Tones - Ch. 12)

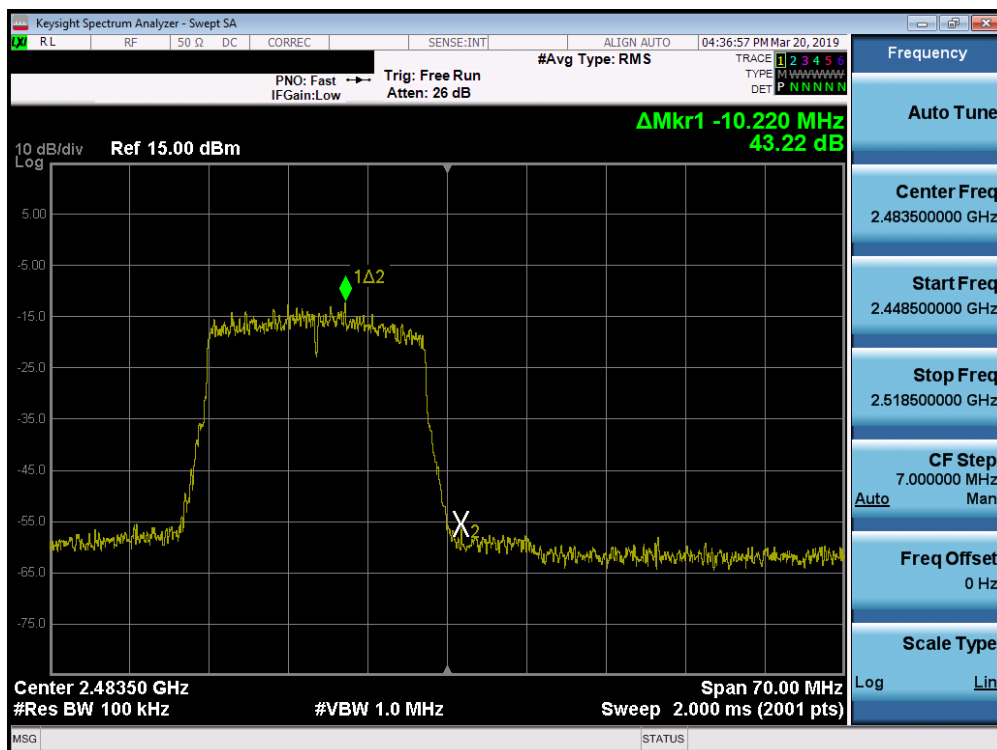


Plot 7-32. Band Edge Plot SISO ANT1 (802.11ax OFDMA - 242 Tones - Ch. 13)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 45 of 115

SISO Antenna-2 Conducted Emissions at the Band Edge



Plot 7-33. Band Edge Plot SISO ANT2 (802.11ax OFDMA - 106 Tones - Ch. 1)

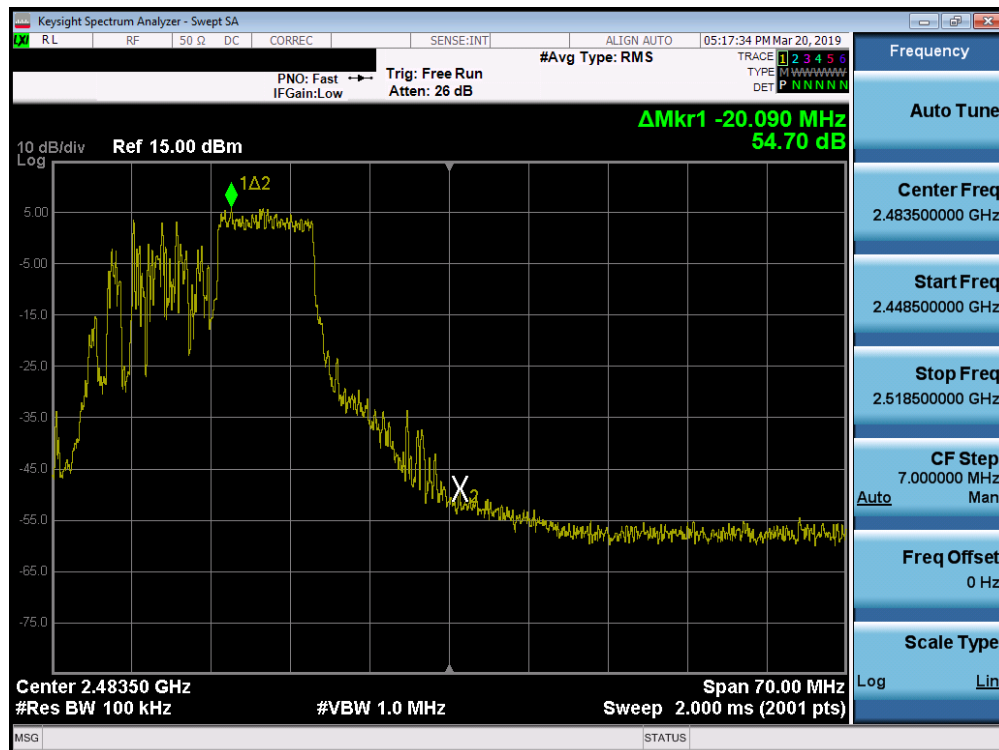


Plot 7-34. Band Edge Plot SISO ANT2 (802.11ax OFDMA - 106 Tones - Ch. 11)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 46 of 115	




Plot 7-35. Band Edge Plot SISO ANT2 (802.11ax OFDMA - 106 Tones - Ch. 12)

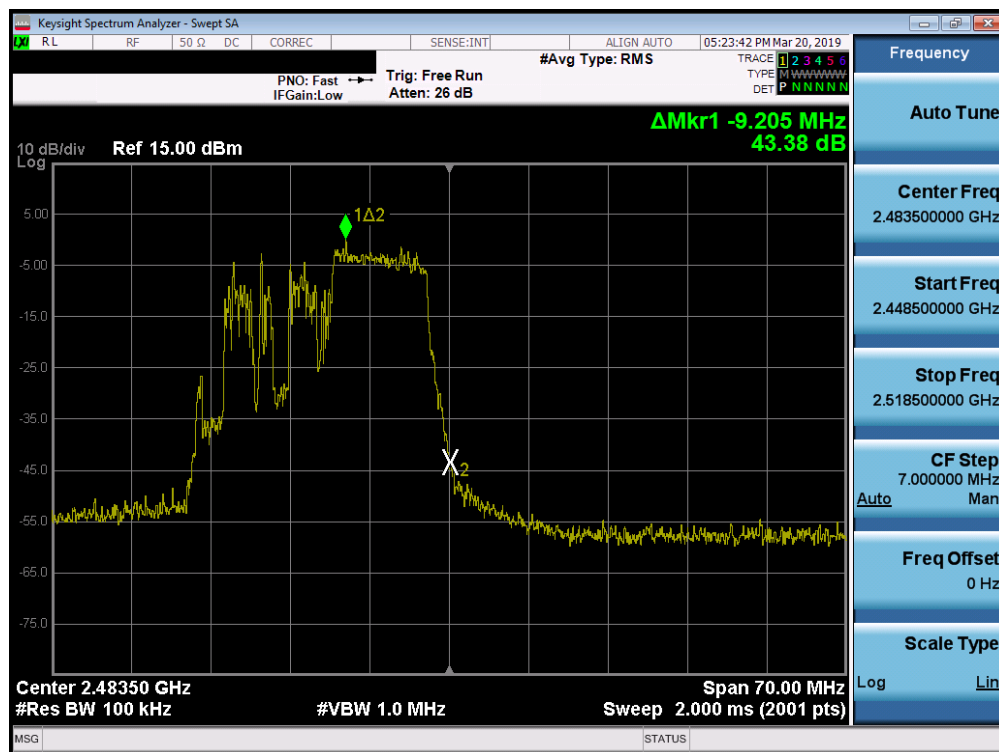


Plot 7-36. Band Edge Plot SISO ANT2 (802.11ax OFDMA - 106 Tones - Ch. 13)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 47 of 115	

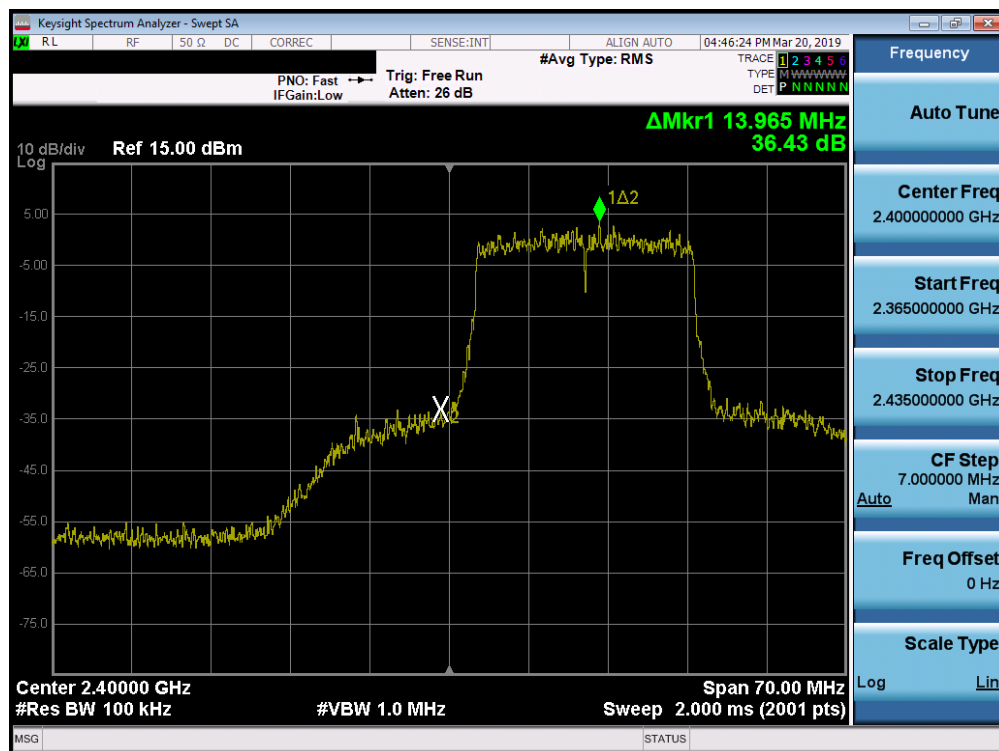

Plot 7-37. Band Edge Plot SISO ANT2 (802.11ax OFDMA - 242 Tones - Ch. 1)

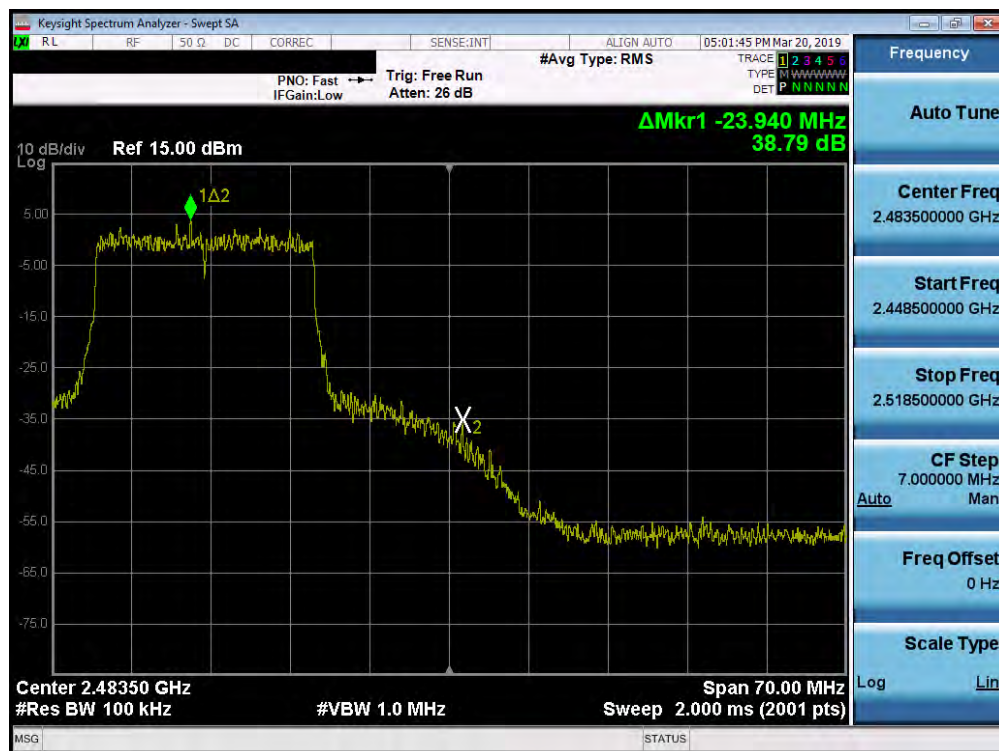

Plot 7-38. Band Edge Plot SISO ANT2 (802.11ax OFDMA - 242 Tones - Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 48 of 115

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted emissions plots, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of ANSI C63.10-2013 and KDB 558074 D01 v05r01.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r01 – Section 8.5
ANSI C63.10-2013 – Section 14.3.3
KDB 662911 D01 v02r01 – Section E3)b)

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 50 of 115

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 51 of 115	

SISO Antenna-1 Conducted Spurious Emission

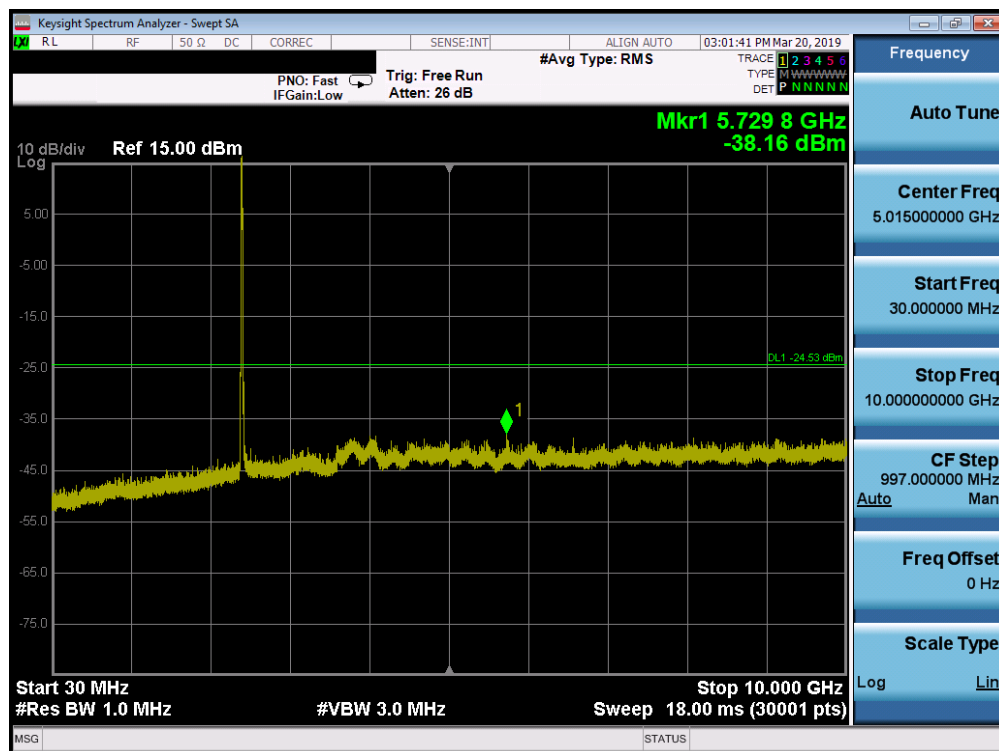


Plot 7-41. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 1)

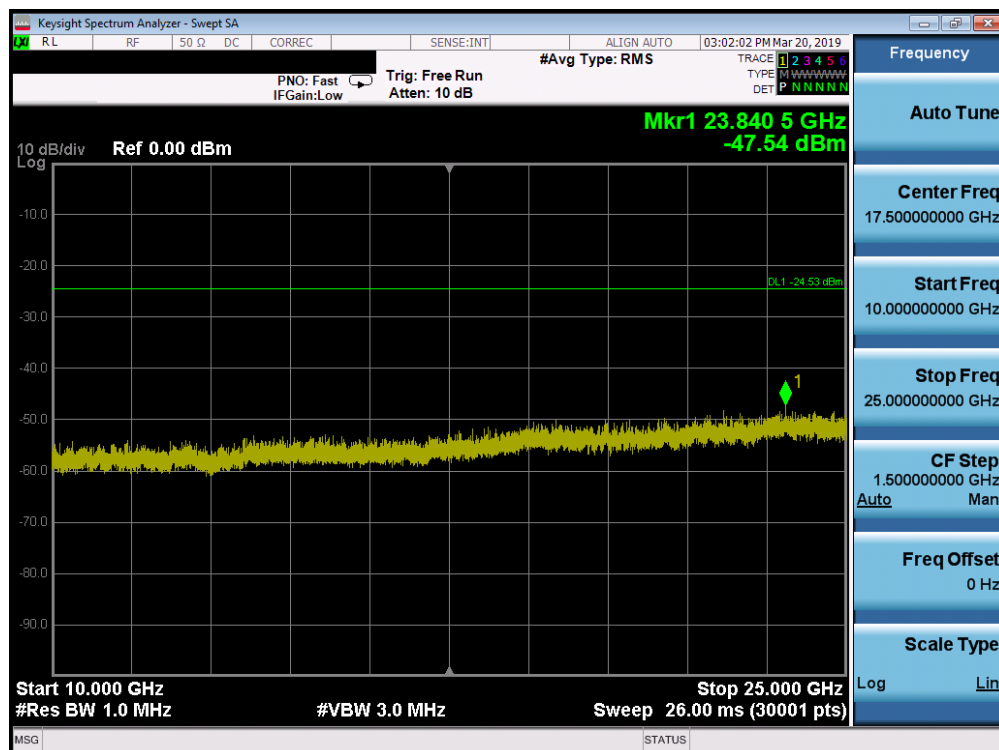


Plot 7-42. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA– 106 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 52 of 115

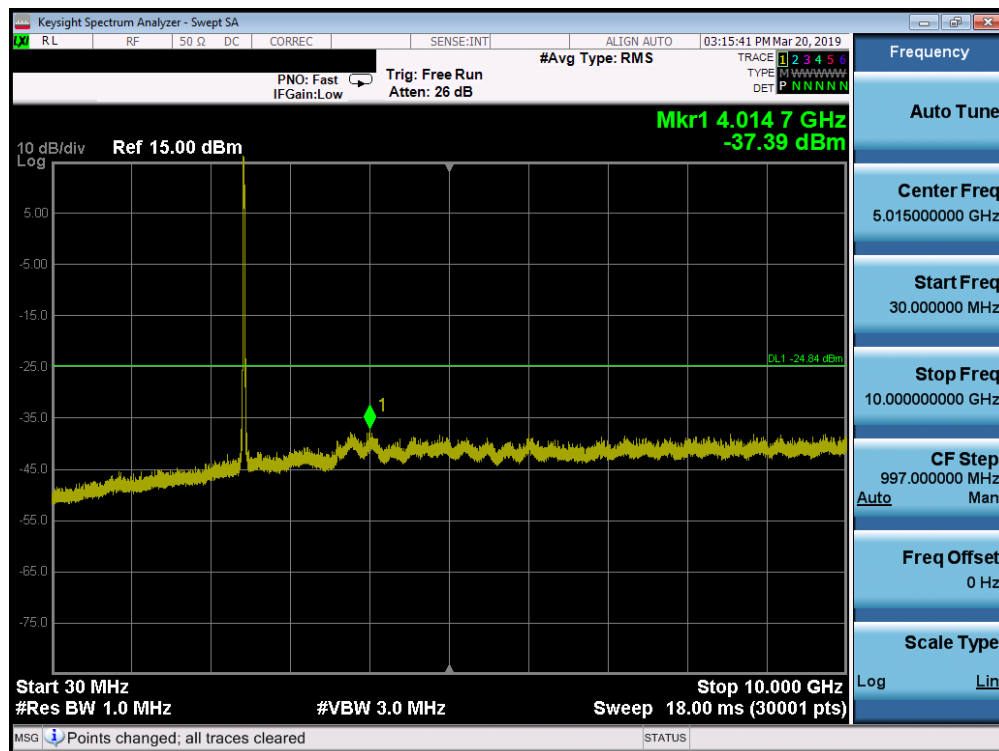


Plot 7-43. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 106 Tones – Ch. 6)

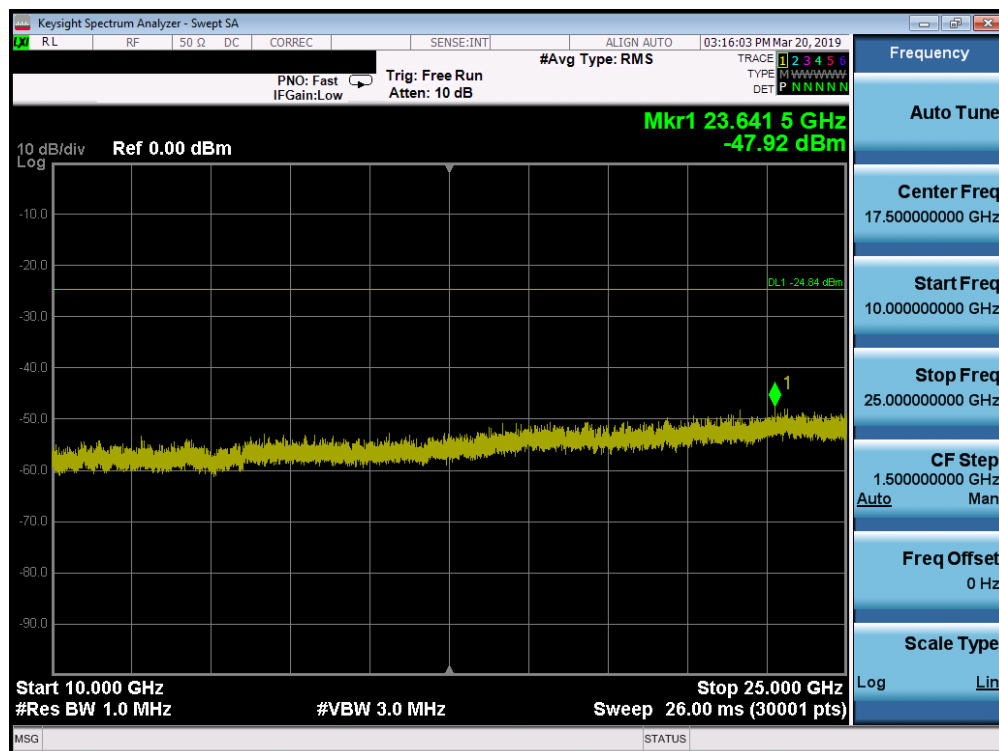


Plot 7-44. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 106 Tones – Ch. 6)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 53 of 115	

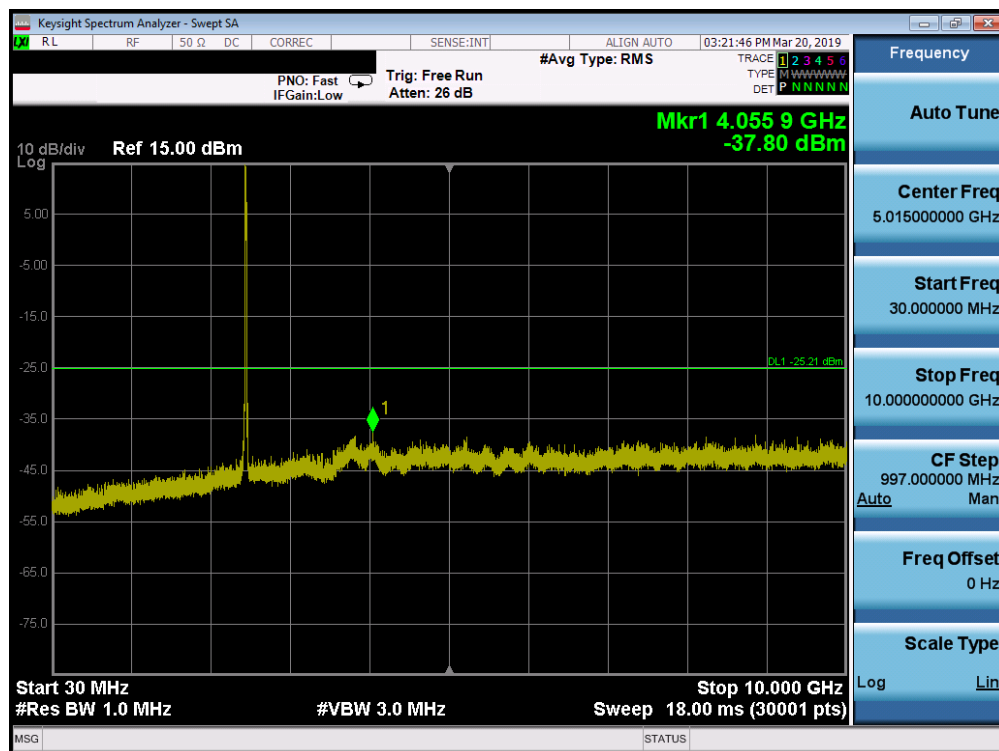


Plot 7-45. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 106 Tones - Ch. 11)

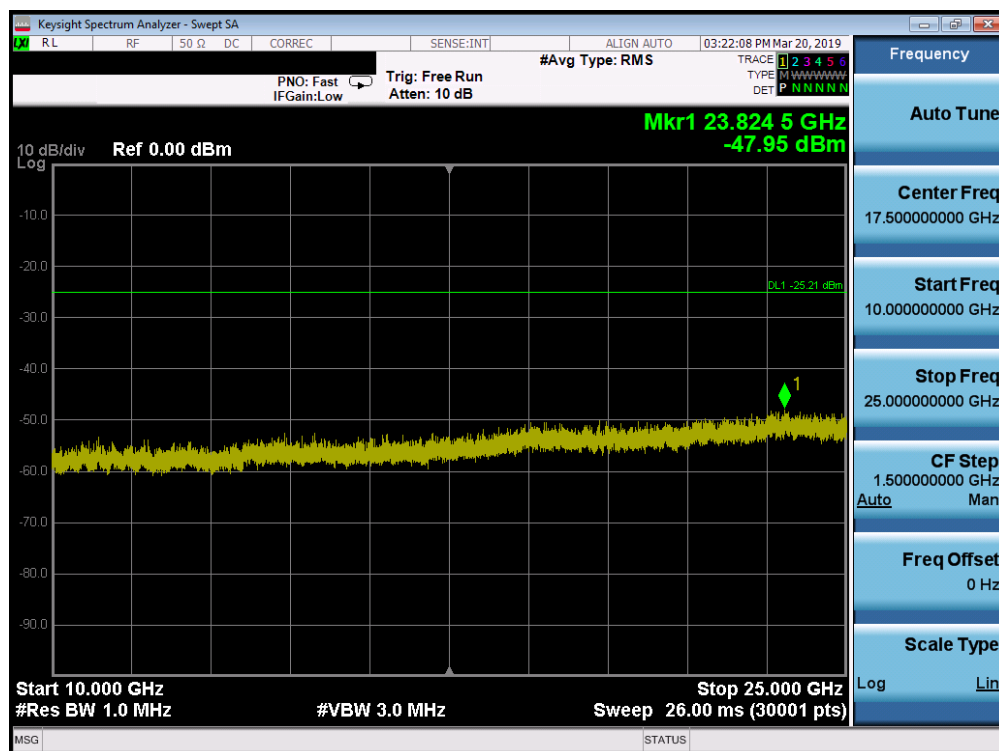


Plot 7-46. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 106 Tones - Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 54 of 115

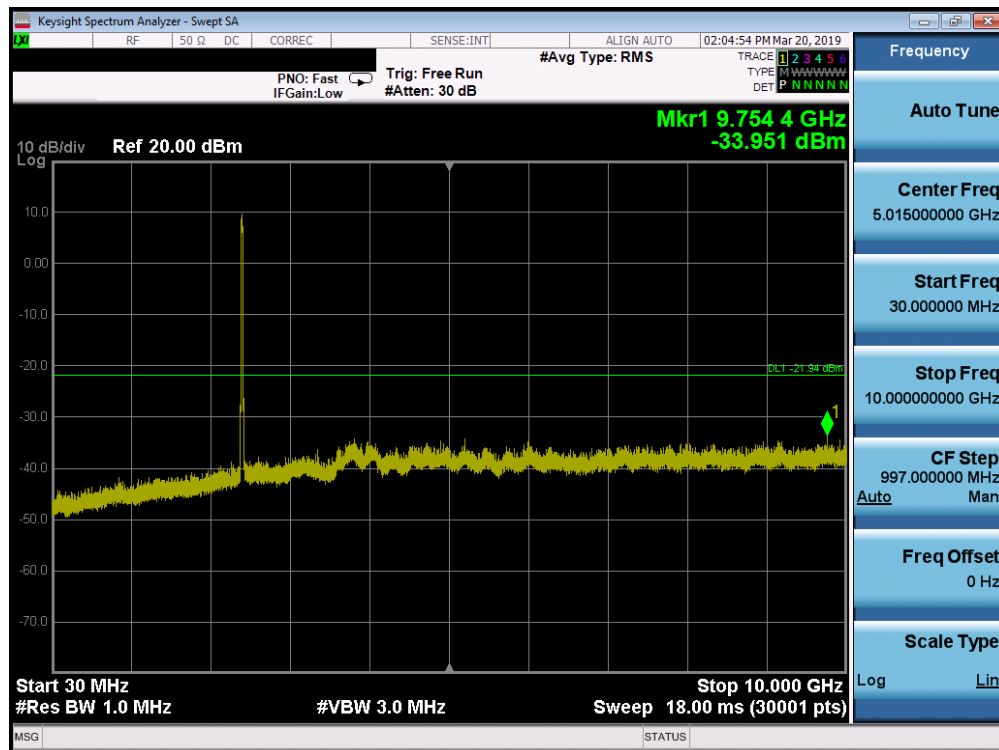


Plot 7-47. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

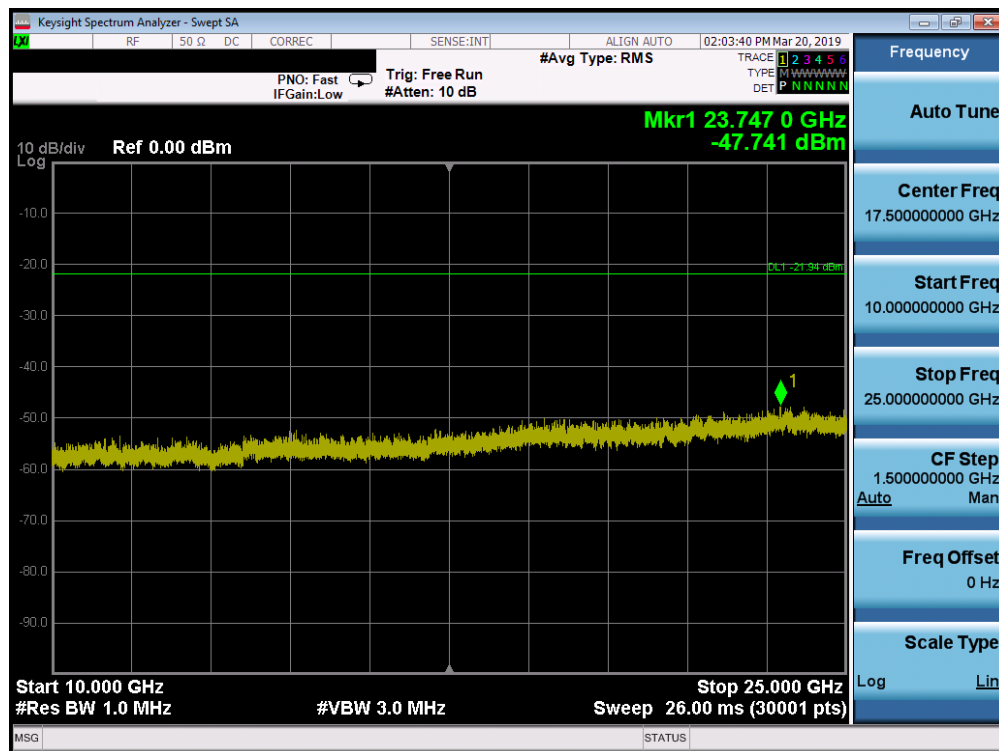


Plot 7-48. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA– 242 Tones – Ch. 1)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 55 of 115	

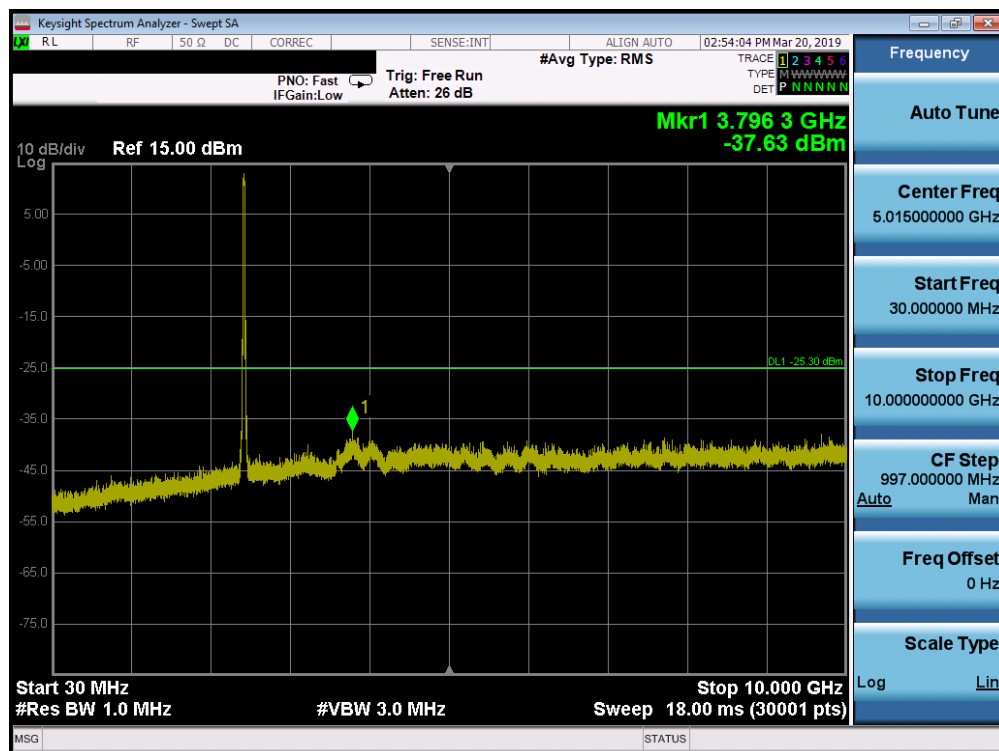


Plot 7-49. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 242 Tones - Ch. 6)

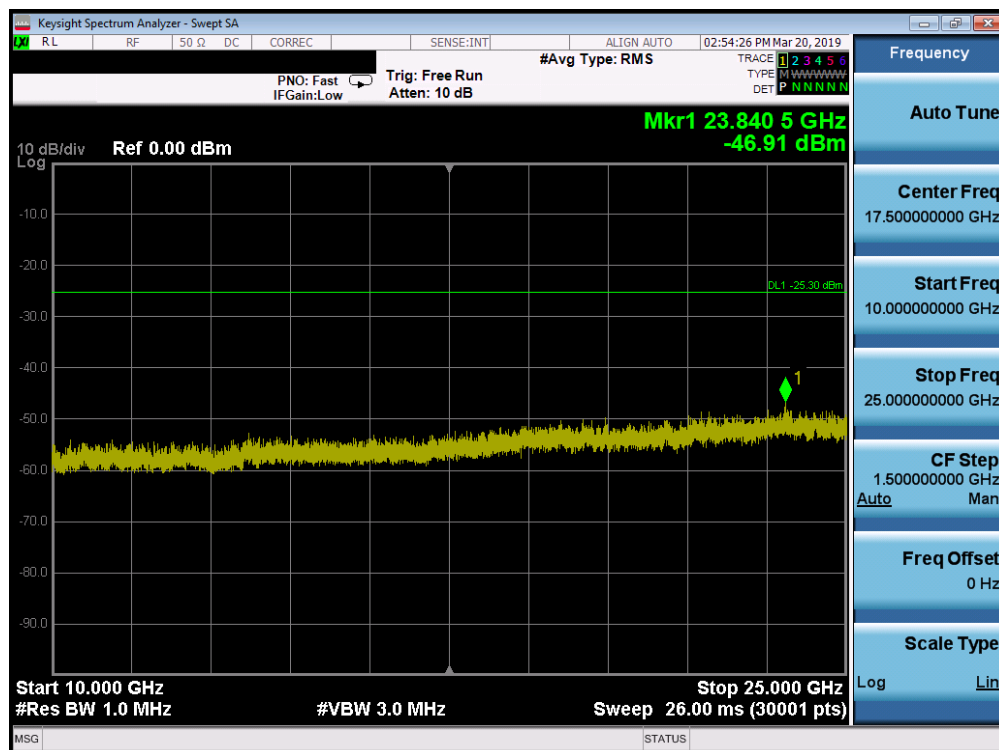


Plot 7-50. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 242 Tones - Ch. 6)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 56 of 115

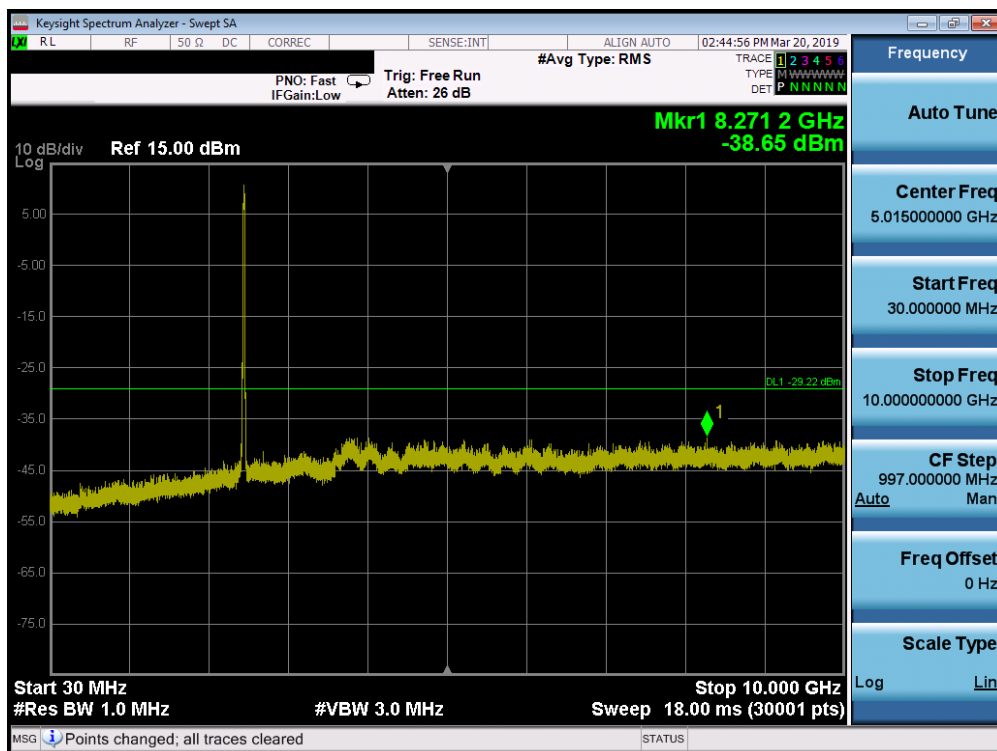


Plot 7-51. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 242 Tones - Ch. 11)

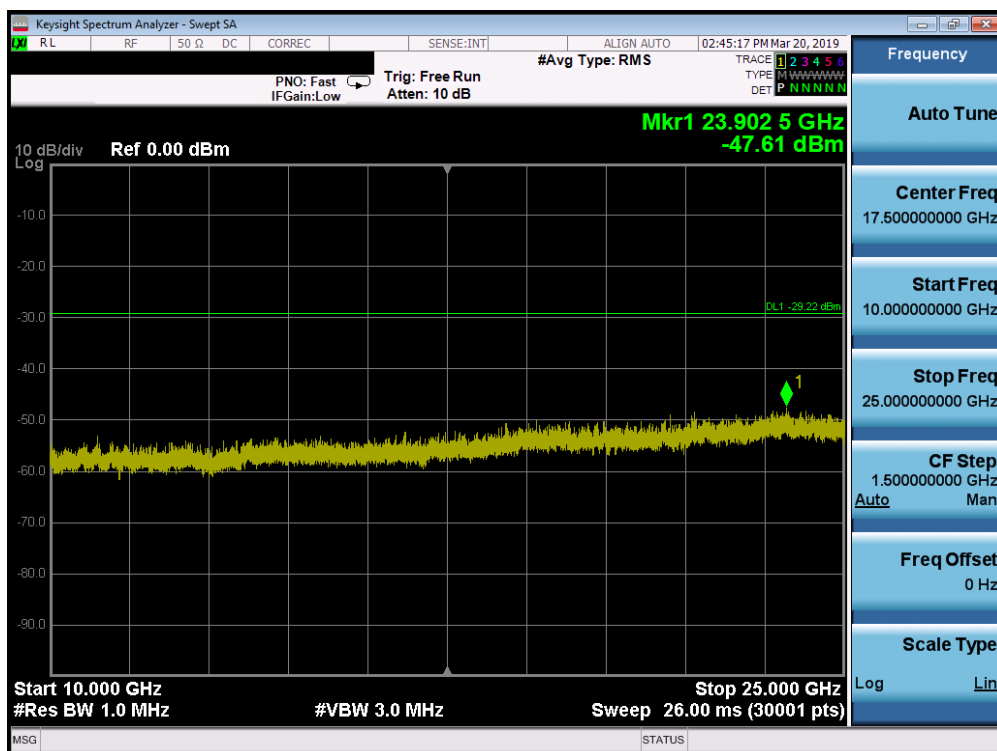


Plot 7-52. Conducted Spurious Plot SISO ANT1 (802.11ax OFDMA- 242 Tones - Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 57 of 115

SISO Antenna-2 Conducted Spurious Emissions

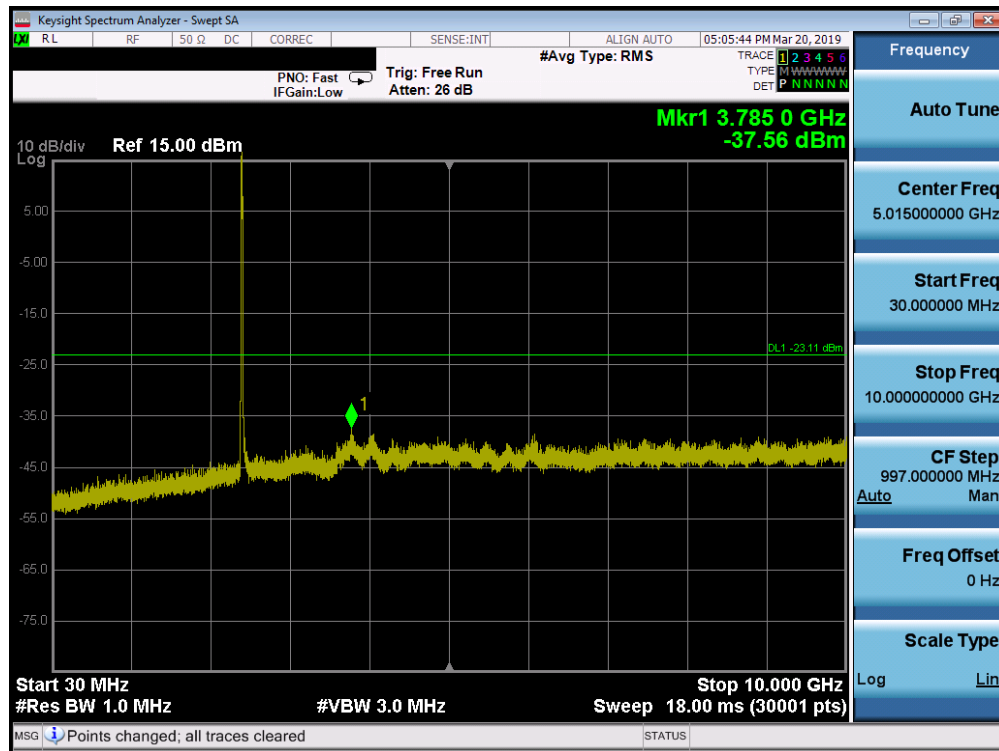


Plot 7-53. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 1)

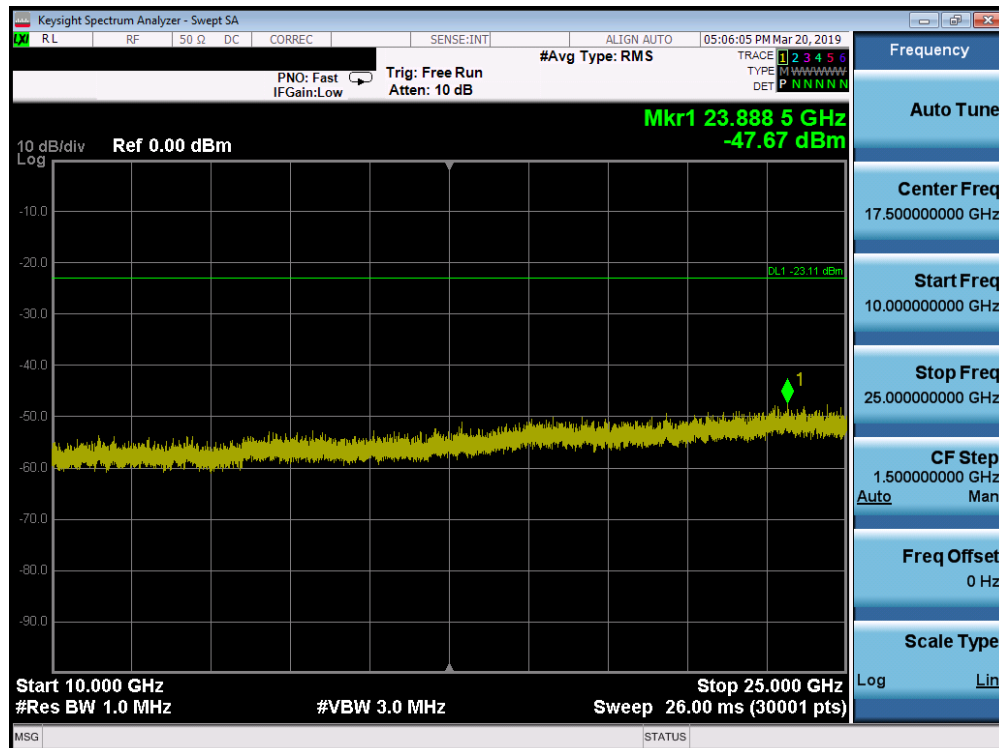


Plot 7-54. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA– 106 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 58 of 115

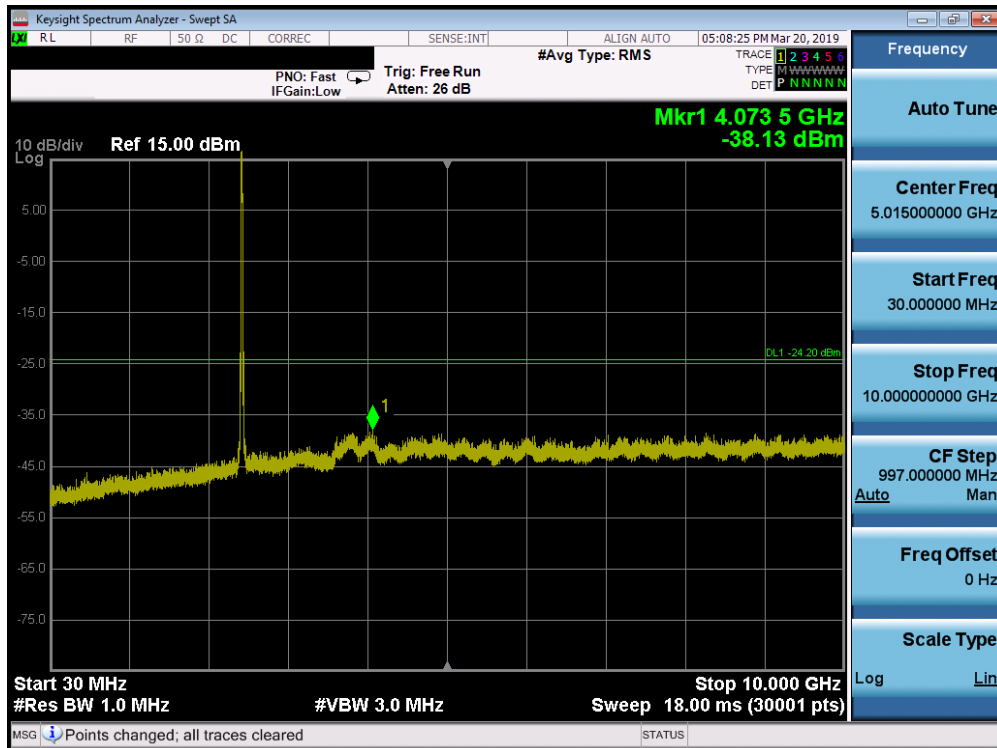


Plot 7-55. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 106 Tones – Ch. 6)

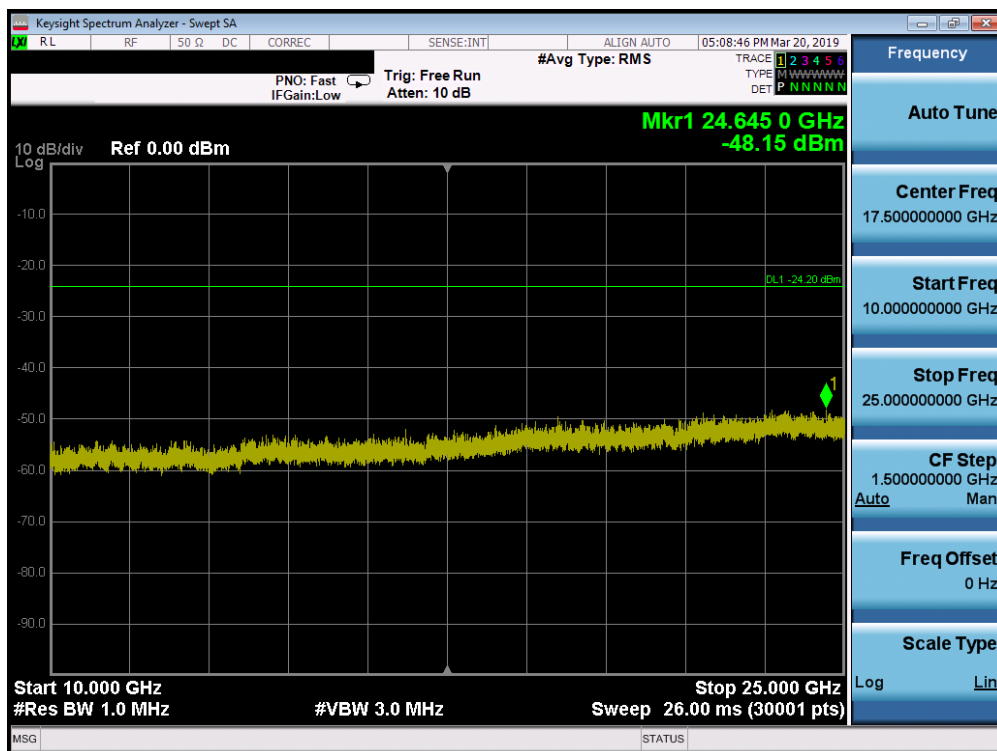


Plot 7-56. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA– 106 Tones – Ch. 6)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 59 of 115

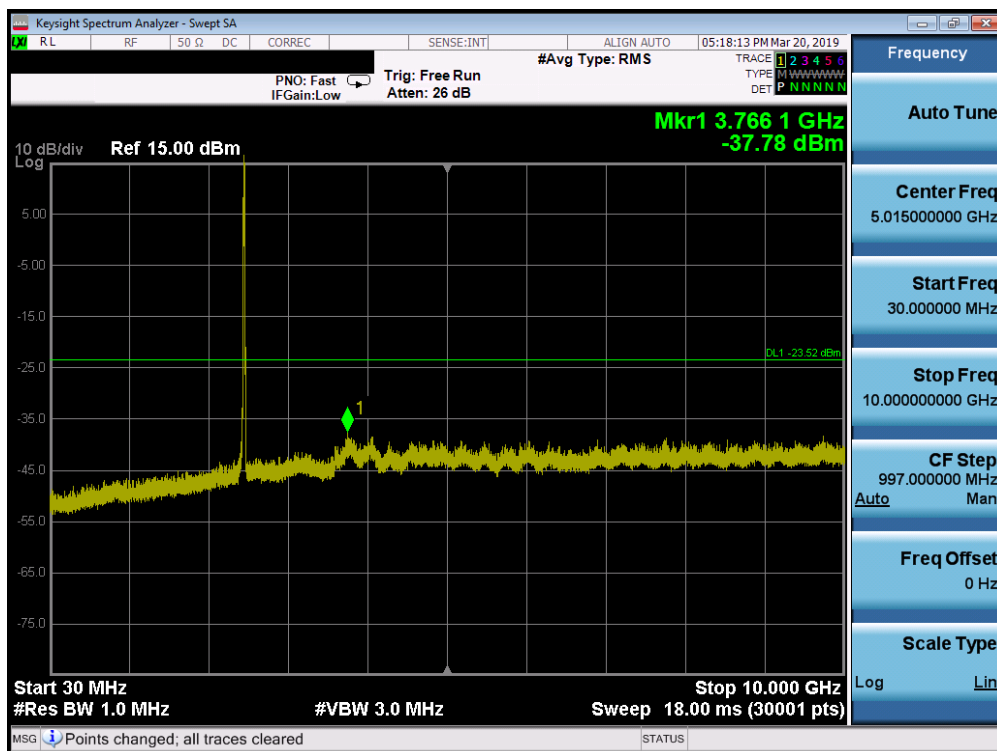


Plot 7-57. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 106 Tones - Ch. 11)

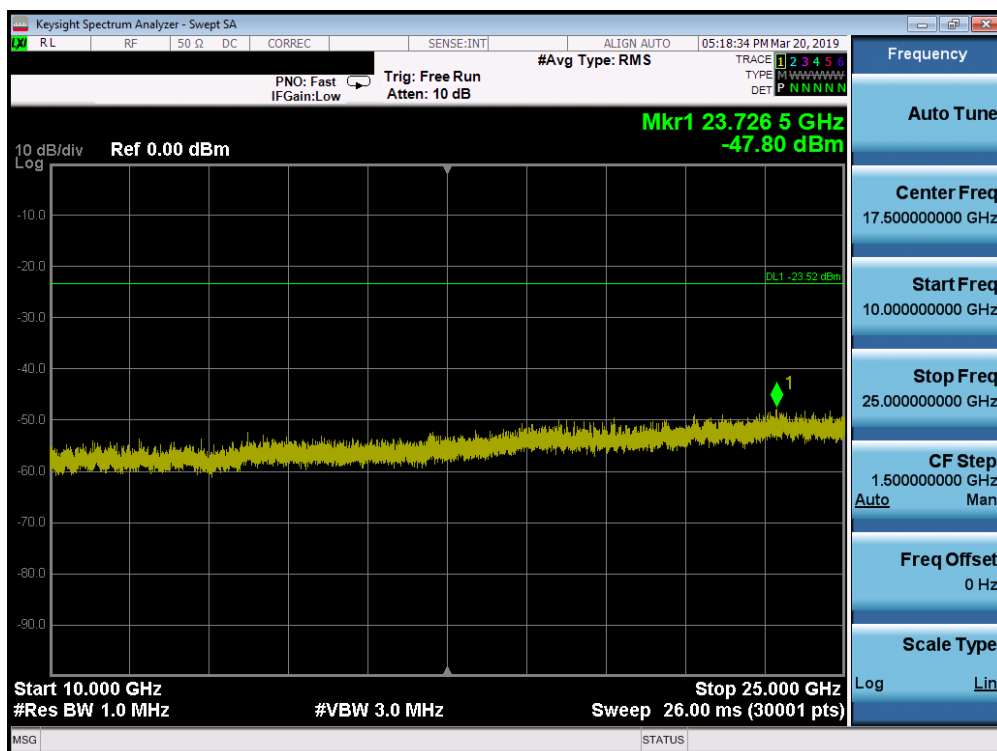


Plot 7-58. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 106 Tones - Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 60 of 115

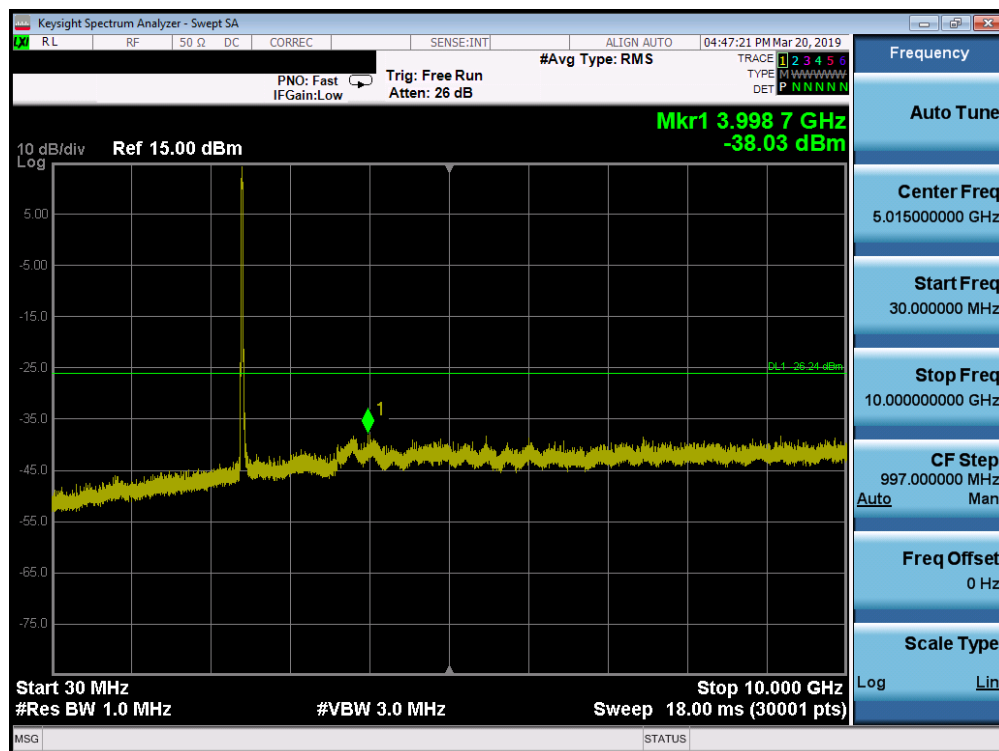


Plot 7-59. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 1)

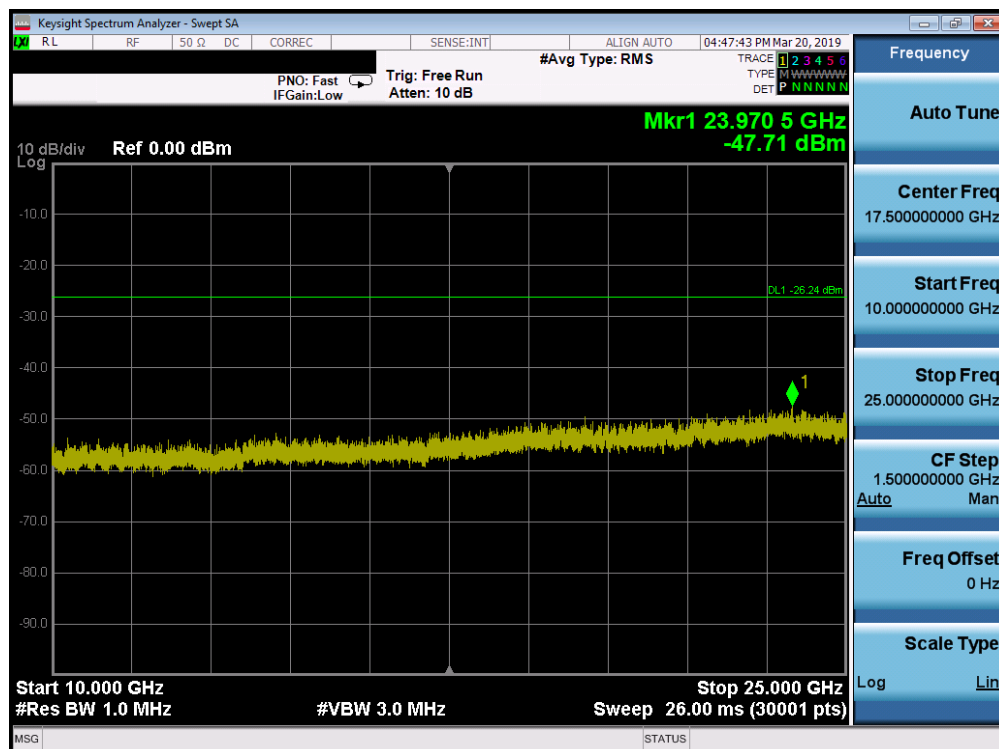


Plot 7-60. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA– 242 Tones – Ch. 1)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 61 of 115

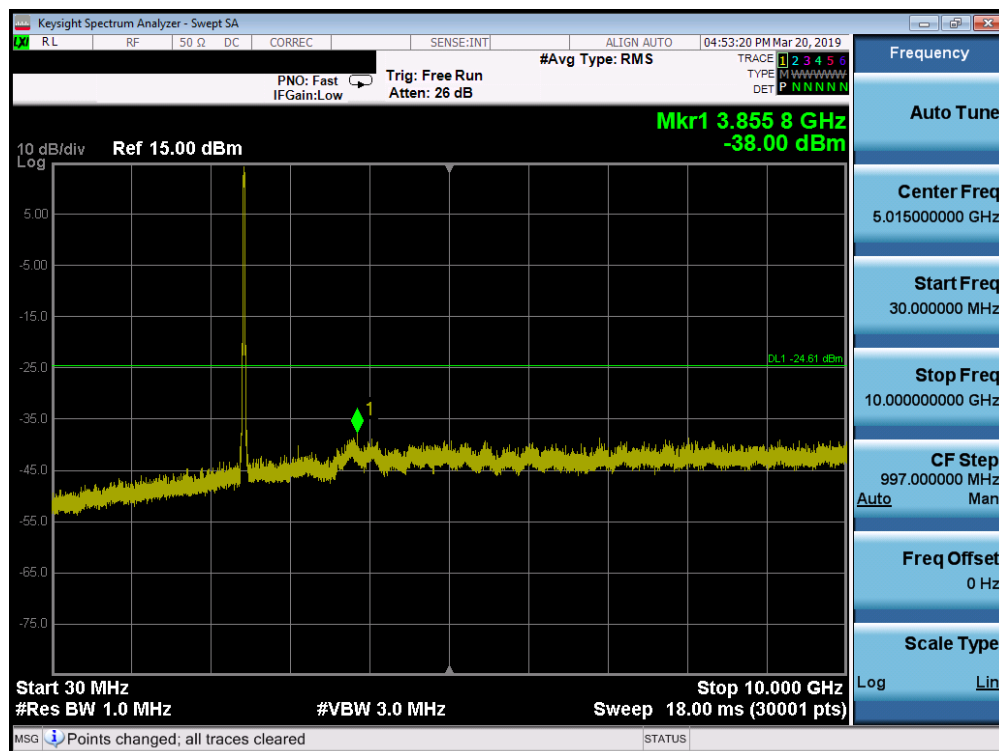


Plot 7-61. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 242 Tones - Ch. 6)

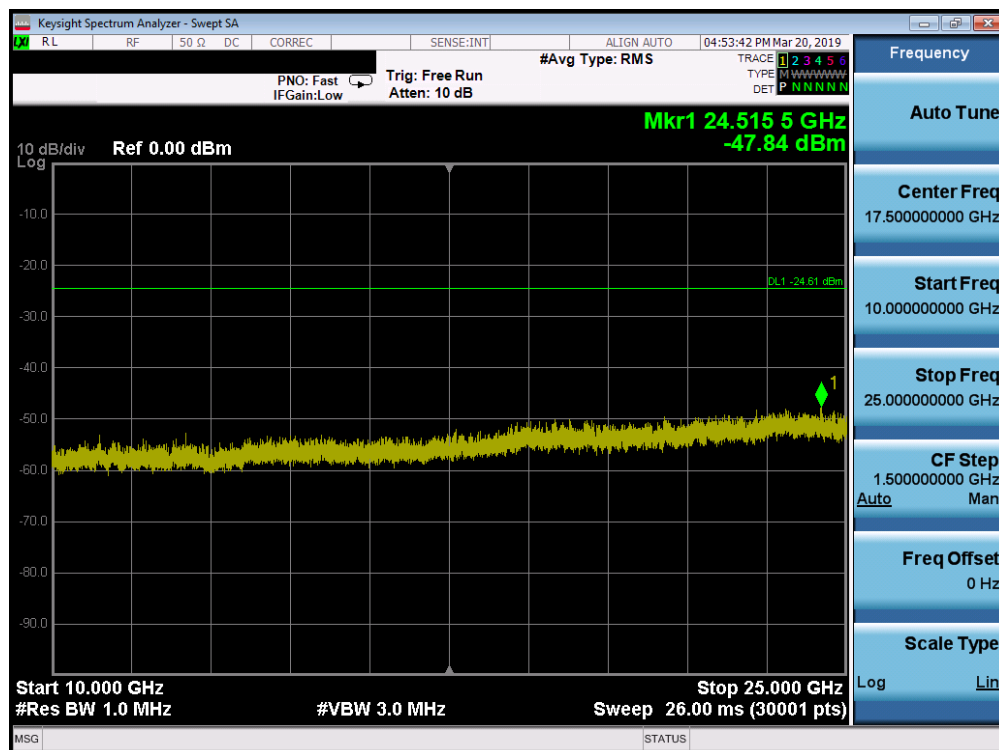


Plot 7-62. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 242 Tones - Ch. 6)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 62 of 115

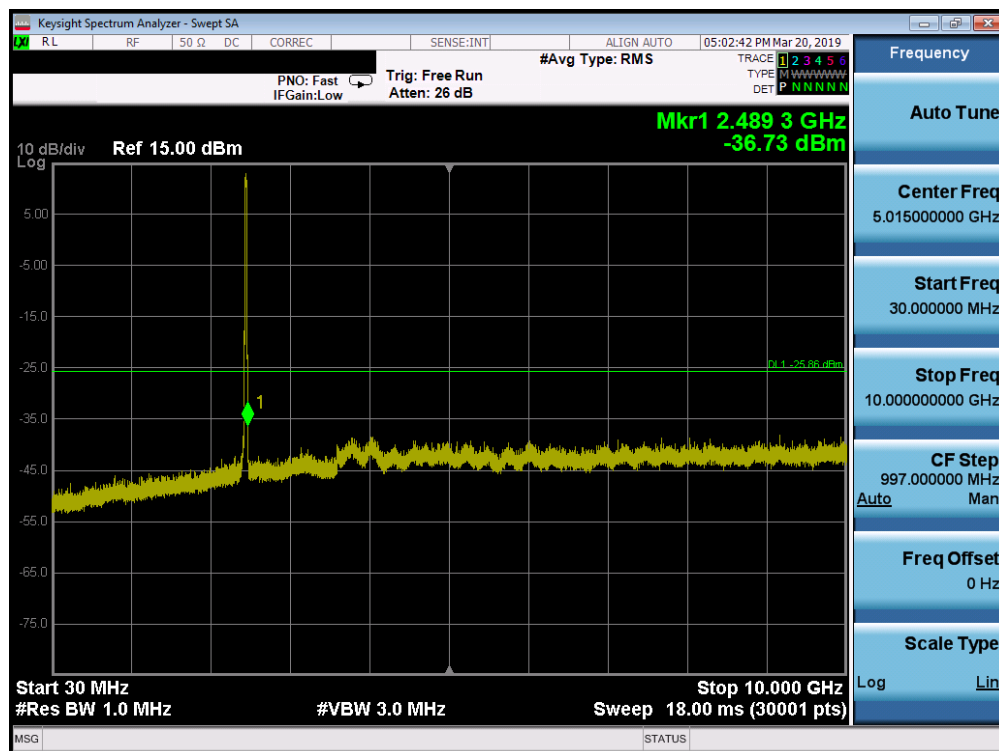

Plot 7-63. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 242 Tones - Ch. 11)

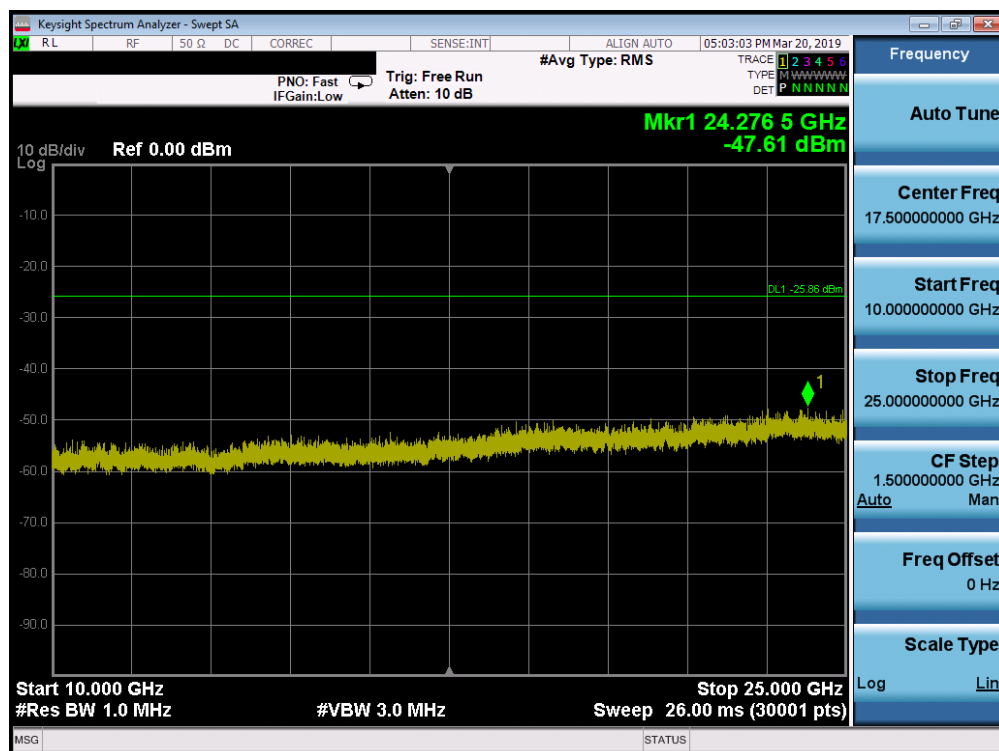

Plot 7-64. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA- 242 Tones - Ch. 11)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 63 of 115

7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-19 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-19. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r01 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 64 of 115

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

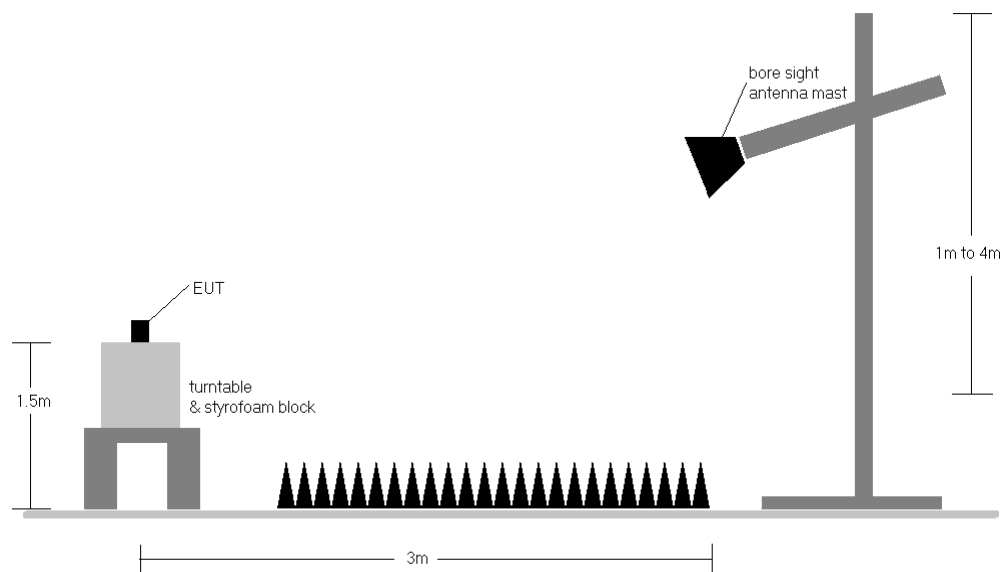


Figure 7-6. Test Instrument & Measurement Setup

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 65 of 115

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r01 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-19.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Some band edge measurements were performed using a channel integration method to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v05r01 Section 13.3, a measurement was performed using a RBW of 100kHz at the frequency with highest emission outside of band edge. For integration that does not start at 2483.5MHz, consideration was taken to ensure the worst case emission is in the 1MHz spectrum. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 66 of 115	

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- o $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- o $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$


Radiated Band Edge Measurement Offset

- o The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 67 of 115	

7.7.1 SISO Antenna-1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

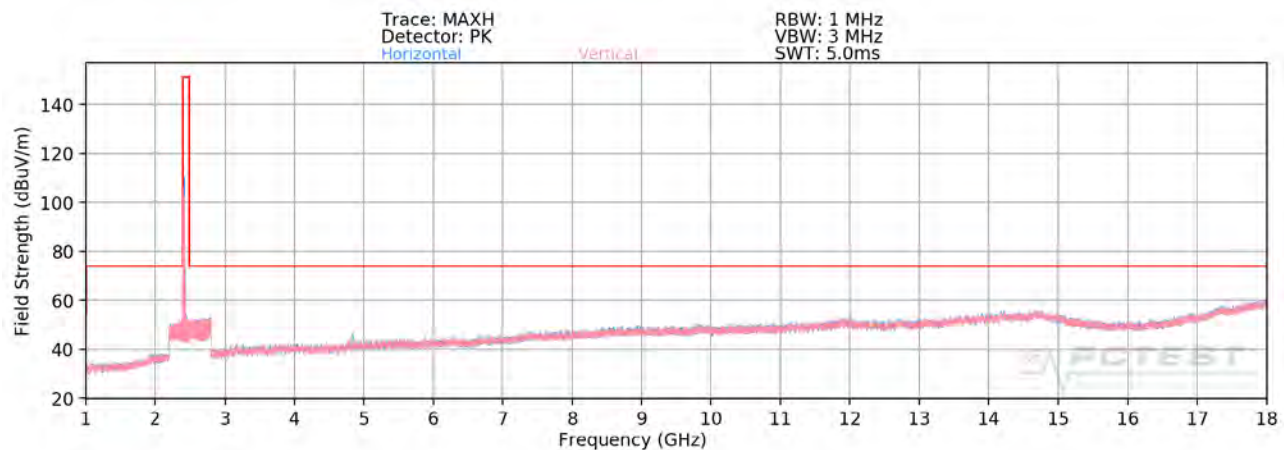

Plot 7-65. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1 – CLOSED)

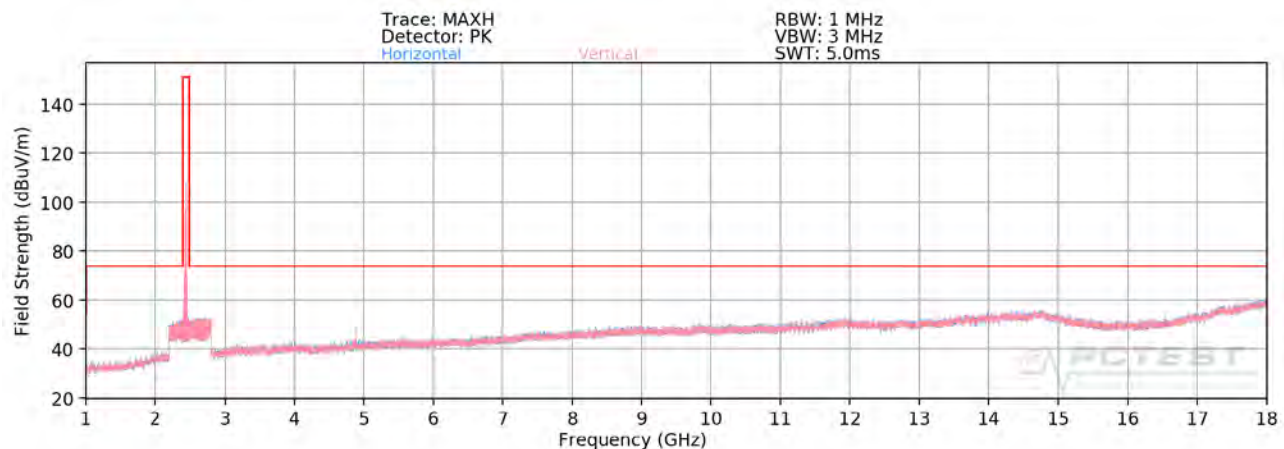


Plot 7-66. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6 – CLOSED)

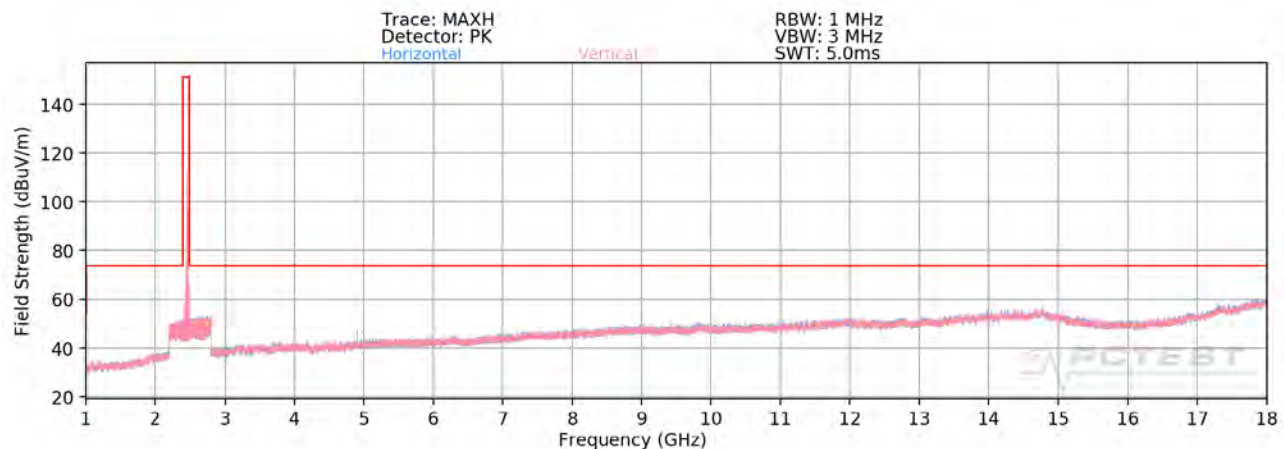


Plot 7-67. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11 – CLOSED)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 68 of 115

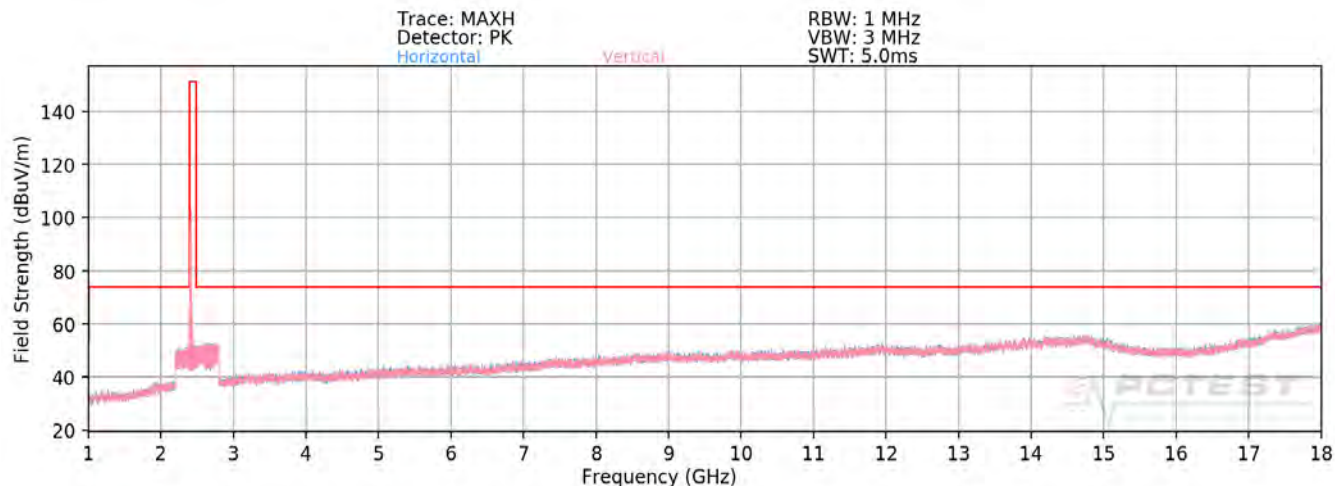

Plot 7-68. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1 – CLOSED)

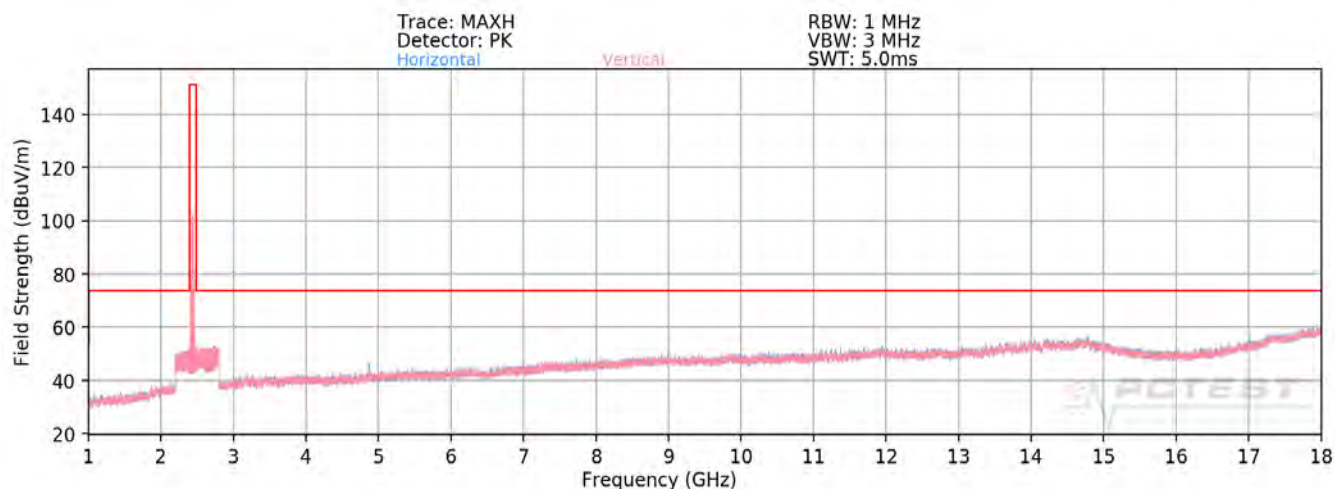

Plot 7-69. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 6 – CLOSED)

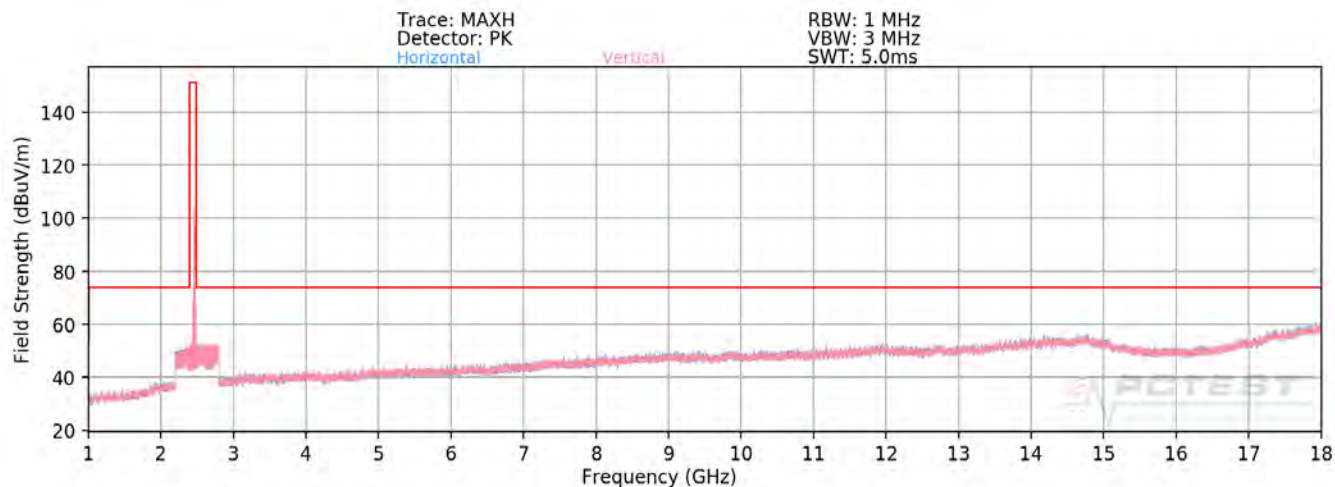


Plot 7-70. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11 – CLOSED)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 69 of 115

SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

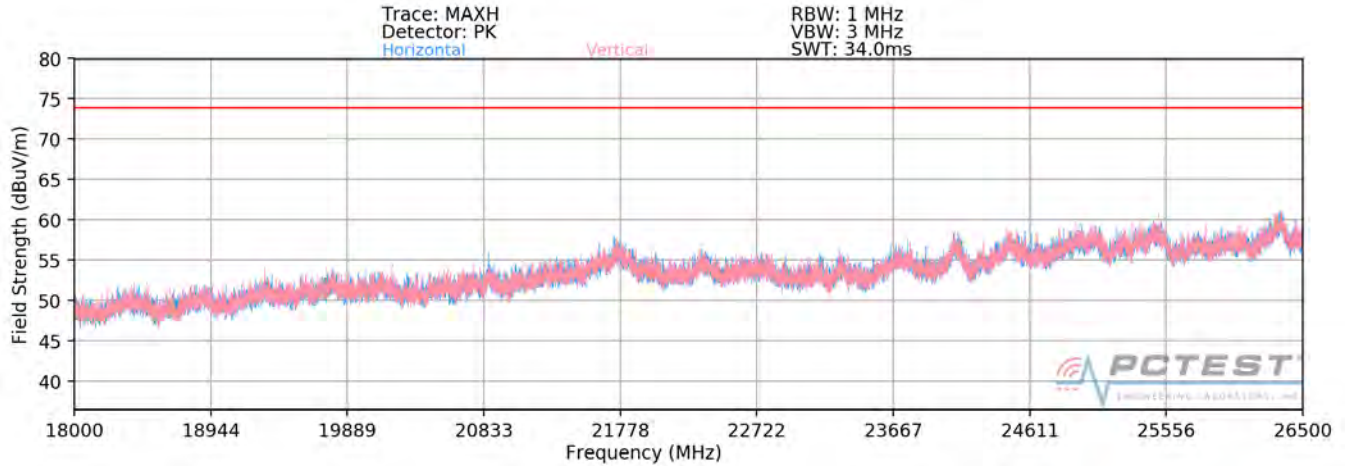

Plot 7-71. Radiated Spurious Plot above 18GHz SISO ANT1 (802.11ax OFDMA – 26 Tones – CLOSED)

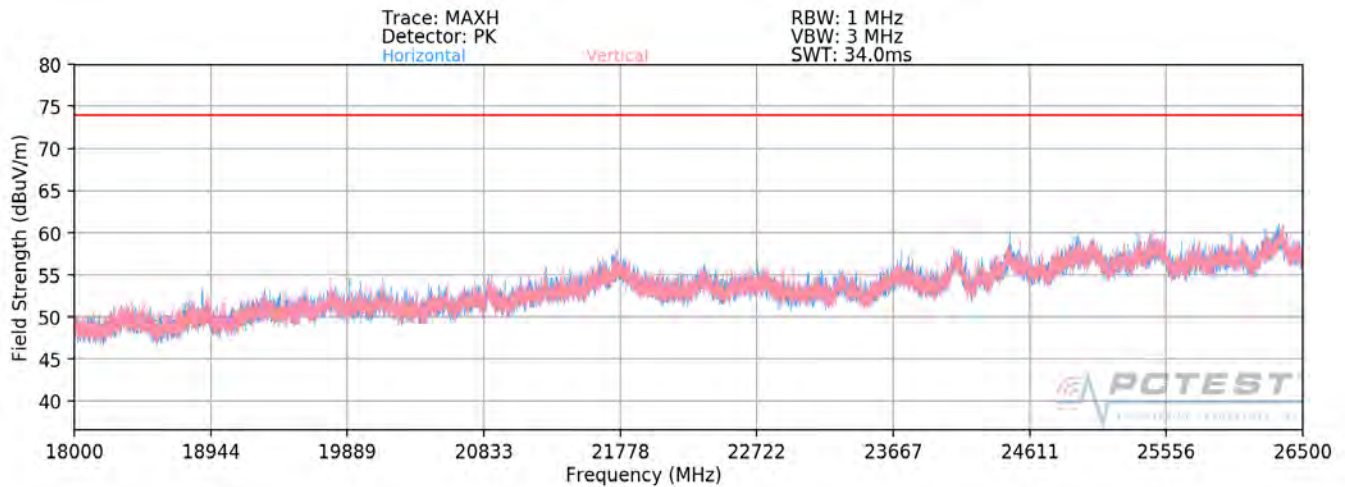

Plot 7-72. Radiated Spurious Plot above 18GHz SISO ANT1 (802.11ax OFDMA – 242 Tones – CLOSED)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 70 of 115

SISO Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 53
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	172	332	-78.46	8.84	37.38	53.98	-16.60
4824.00	Peak	H	172	332	-66.72	8.84	49.12	73.98	-24.86
12060.00	Avg	H	-	-	-83.13	21.88	45.75	53.98	-8.23
12060.00	Peak	H	-	-	-72.30	21.88	56.58	73.98	-17.40

Table 7-20. Radiated Measurements SISO ANT1 (26 Tones - CLOSED)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 53
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	163	338	-77.94	8.39	37.45	53.98	-16.53
4874.00	Peak	H	163	338	-65.93	8.39	49.46	73.98	-24.52
7311.00	Avg	H	-	-	-83.67	14.07	37.40	53.98	-16.58
7311.00	Peak	H	-	-	-72.66	14.07	48.41	73.98	-25.57
12185.00	Avg	H	-	-	-83.65	21.73	45.08	53.98	-8.90
12185.00	Peak	H	-	-	-72.90	21.73	55.83	73.98	-18.15

Table 7-21. Radiated Measurements SISO ANT1 (26 Tones - CLOSED)

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 71 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	218	45	-78.49	8.79	37.30	53.98	-16.68
4924.00	Peak	H	218	45	-67.11	8.79	48.68	73.98	-25.30
7386.00	Avg	H	-	-	-83.66	13.59	36.93	53.98	-17.05
7386.00	Peak	H	-	-	-72.11	13.59	48.48	73.98	-25.50
12310.00	Avg	H	-	-	-83.86	21.90	45.04	53.98	-8.94
12310.00	Peak	H	-	-	-72.29	21.90	56.61	73.98	-17.37

Table 7-22. Radiated Measurements SISO ANT1 (26 Tones - CLOSED)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-78.37	8.84	37.47	53.98	-16.51
4824.00	Peak	H	-	-	-66.99	8.84	48.85	73.98	-25.13
12060.00	Avg	H	-	-	-83.21	21.88	45.67	53.98	-8.31
12060.00	Peak	H	-	-	-72.15	21.88	56.73	73.98	-17.25

Table 7-23. Radiated Measurements SISO ANT1 (242 Tones - CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 72 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	138	344	-76.64	8.39	38.75	53.98	-15.23
4874.00	Peak	H	138	344	-65.08	8.39	50.31	73.98	-23.67
7311.00	Avg	H	-	-	-83.50	14.07	37.57	53.98	-16.41
7311.00	Peak	H	-	-	-72.38	14.07	48.69	73.98	-25.29
12185.00	Avg	H	-	-	-83.44	21.73	45.29	53.98	-8.69
12185.00	Peak	H	-	-	-72.97	21.73	55.76	73.98	-18.22

Table 7-24. Radiated Measurements SISO ANT1 (242 Tones - CLOSED)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	149	345	-77.30	8.79	38.49	53.98	-15.49
4924.00	Peak	H	149	345	-66.75	8.79	49.04	73.98	-24.94
7386.00	Avg	H	-	-	-73.08	13.59	47.51	53.98	-6.47
7386.00	Peak	H	-	-	-72.78	13.59	47.81	73.98	-26.17
12310.00	Avg	H	-	-	-83.71	21.90	45.19	53.98	-8.79
12310.00	Peak	H	-	-	-72.82	21.90	56.08	73.98	-17.90

Table 7-25. Radiated Measurements SISO ANT1 (242 Tones - CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
			Page 73 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	205	55	-78.35	8.79	37.44	53.98	-16.54
4924.00	Peak	H	205	55	-65.41	8.79	50.38	73.98	-23.60
7386.00	Avg	H	-	-	-83.01	13.59	37.58	53.98	-16.40
7386.00	Peak	H	-	-	-72.31	13.59	48.28	73.98	-25.70
12310.00	Avg	H	-	-	-83.90	21.90	45.00	53.98	-8.98
12310.00	Peak	H	-	-	-73.04	21.90	55.86	73.98	-18.12

Table 7-26. Radiated Measurements SISO ANT1 with WCP (26 Tones - CLOSED)


FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
			Page 74 of 115

7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

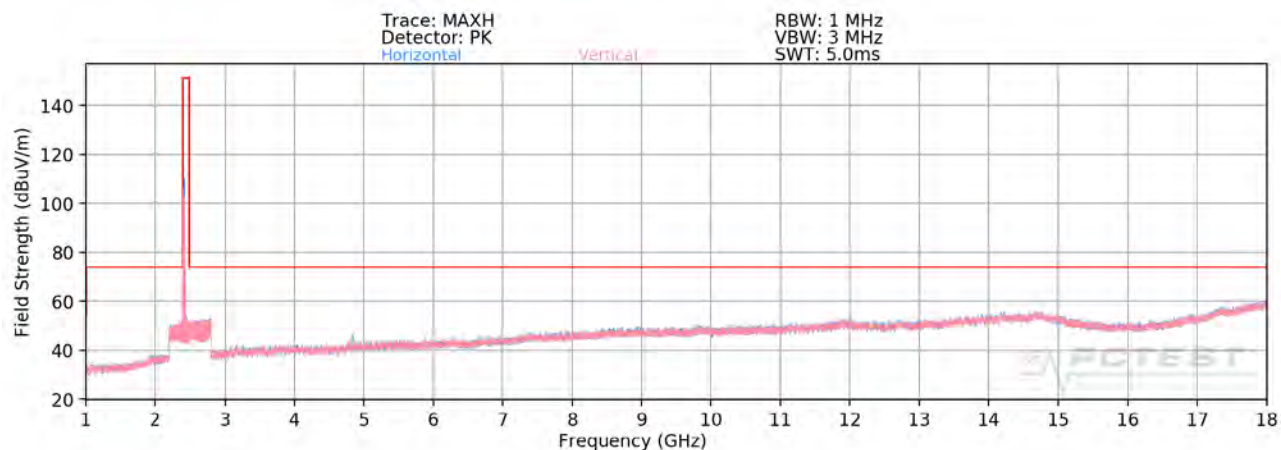

Plot 7-73. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1 – CLOSED)

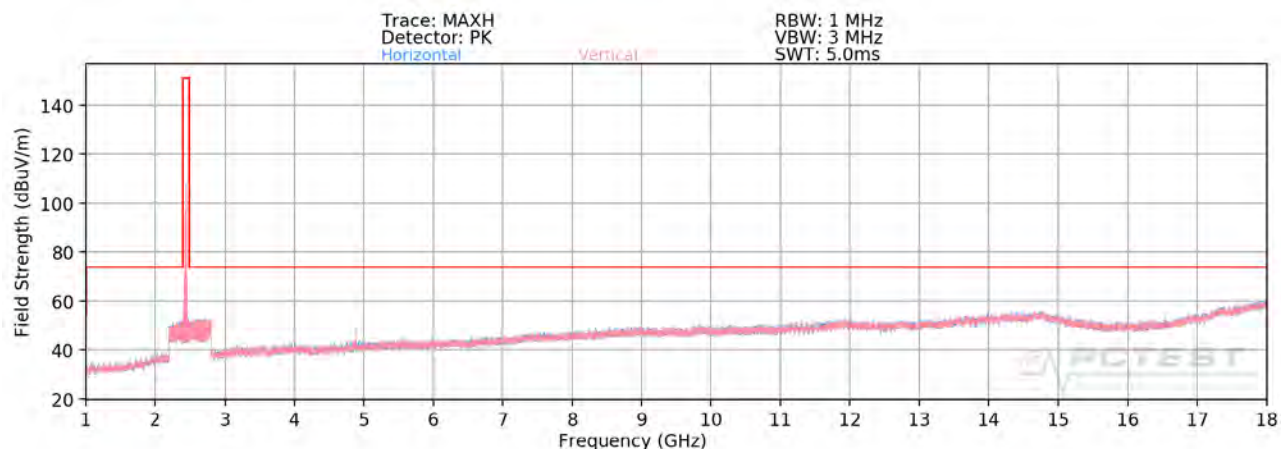


Plot 7-74. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6 – CLOSED)

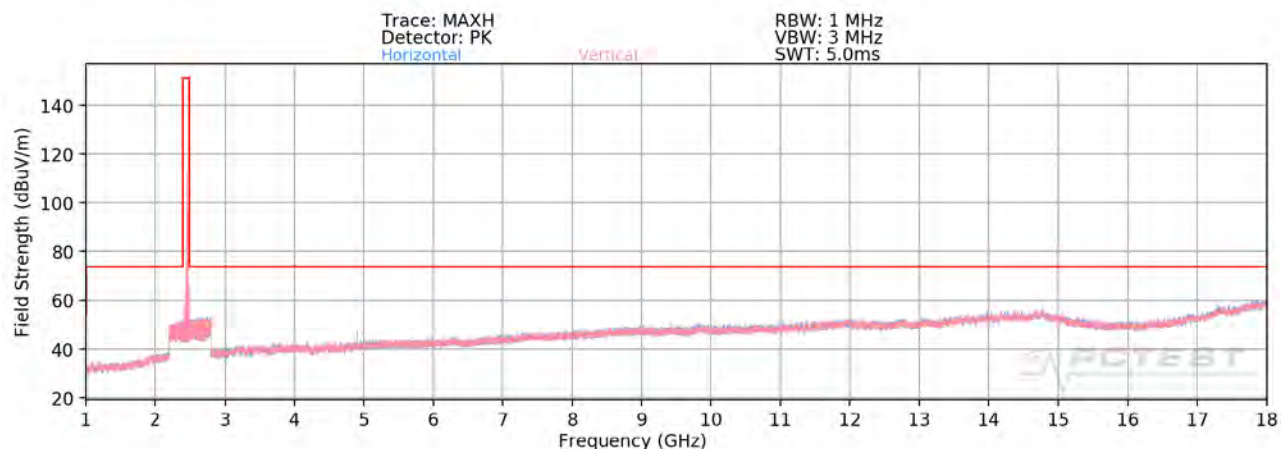


Plot 7-75. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11 – CLOSED)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 75 of 115

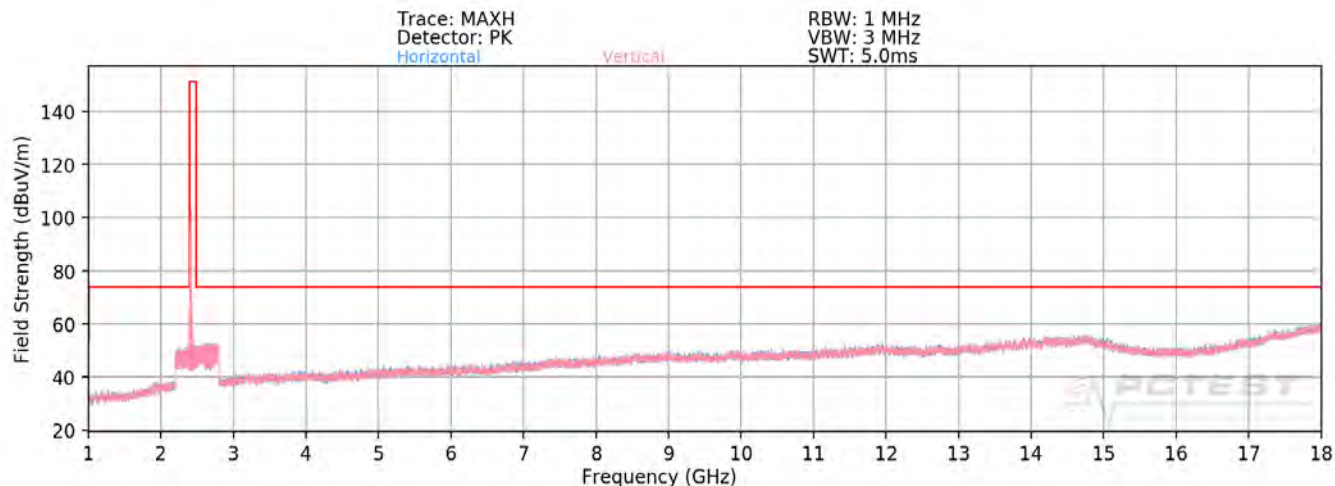

Plot 7-76. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1 – CLOSED)

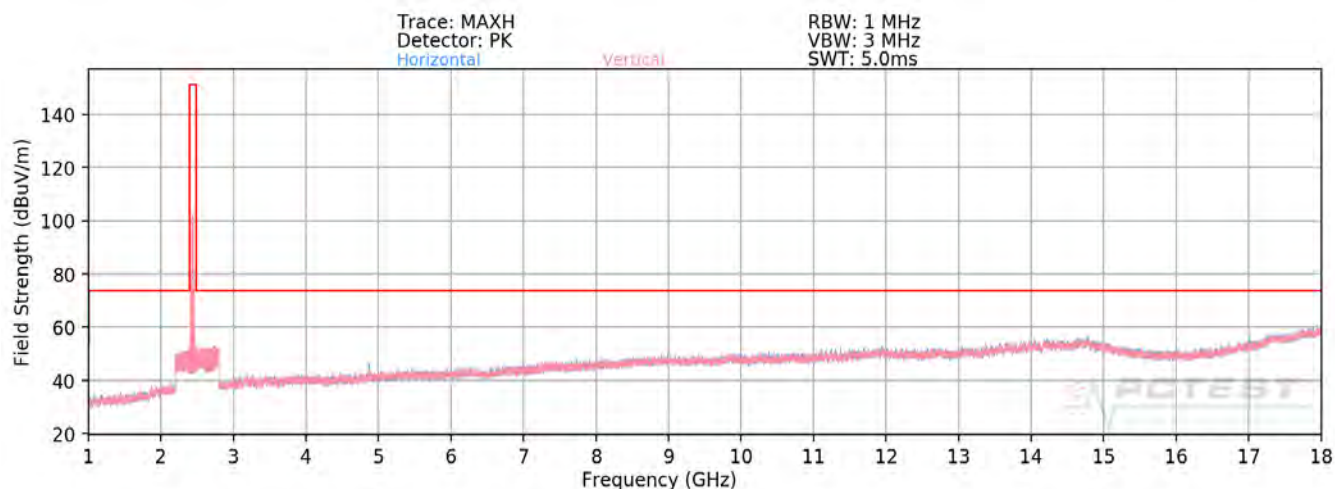

Plot 7-77. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6 – CLOSED)

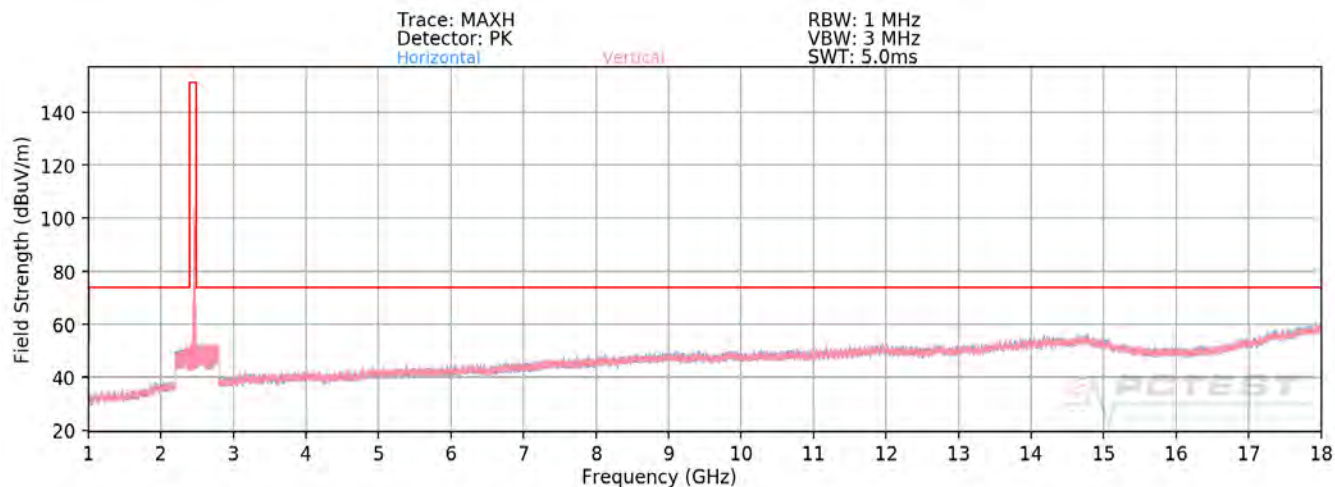


Plot 7-78. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11 – CLOSED)


FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 76 of 115

SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

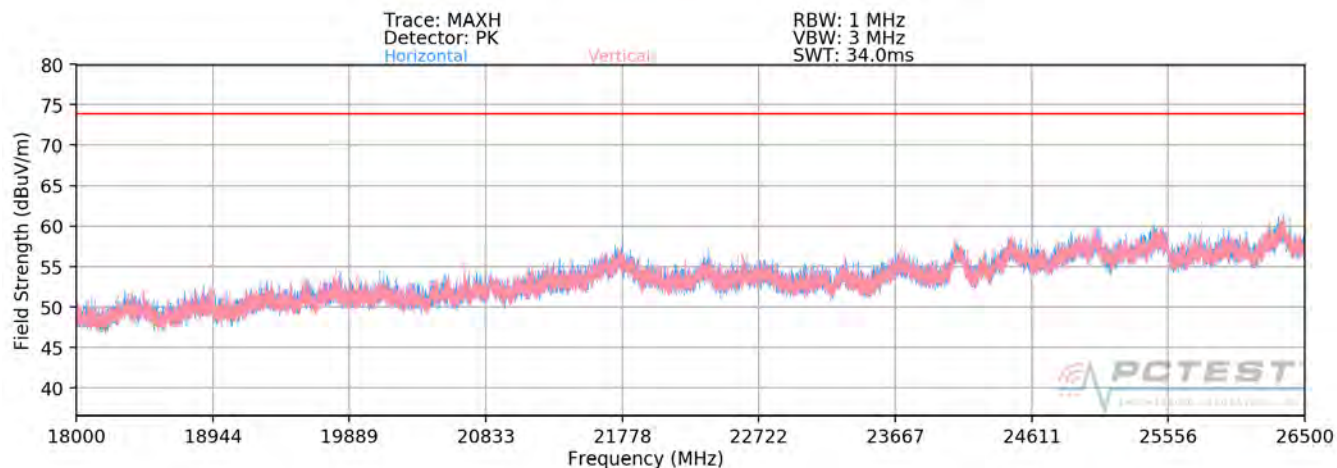

Plot 7-79. Radiated Spurious Plot above 18GHz SISO ANT2 (802.11ax OFDMA – 26 Tones – CLOSED)

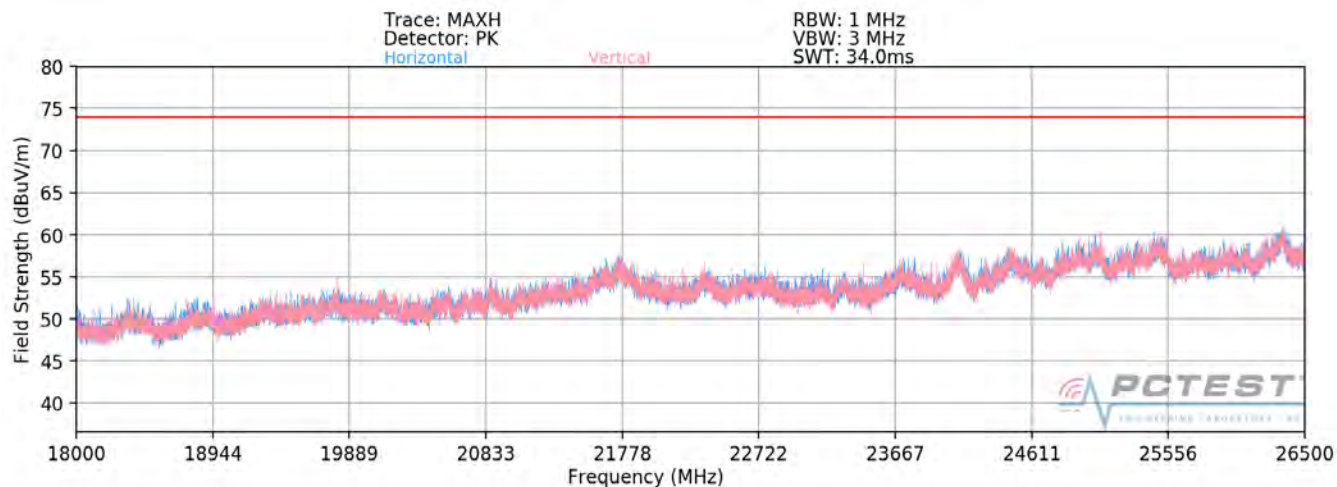

Plot 7-80. Radiated Spurious Plot above 18GHz SISO ANT2 (802.11ax OFDMA – 242 Tones – CLOSED)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 77 of 115

SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 53
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-78.46	7.06	35.60	53.98	-18.38
4824.00	Peak	H	-	-	-66.72	7.06	47.34	73.98	-26.64
12060.00	Avg	H	-	-	-80.13	17.99	44.86	53.98	-9.12
12060.00	Peak	H	-	-	-68.30	17.99	56.69	73.98	-17.29

Table 7-27. Radiated Measurements SISO ANT2 (26 Tones - CLOSED)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 53
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	179	343	-77.94	7.46	36.52	53.98	-17.46
4874.00	Peak	H	179	343	-65.93	7.46	48.53	73.98	-25.45
7311.00	Avg	H	141	76	-78.67	12.07	40.40	53.98	-13.58
7311.00	Peak	H	141	76	-65.66	12.07	53.41	73.98	-20.57
12185.00	Avg	H	-	-	-80.65	18.70	45.05	53.98	-8.93
12185.00	Peak	H	-	-	-68.90	18.70	56.80	73.98	-17.18

Table 7-28. Radiated Measurements SISO ANT2 (26 Tones- CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 78 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	160	324	-78.49	7.08	35.59	53.98	-18.39
4924.00	Peak	H	160	324	-67.11	7.08	46.97	73.98	-27.01
7386.00	Avg	H	105	64	-77.66	11.90	41.24	53.98	-12.74
7386.00	Peak	H	105	64	-65.11	11.90	53.79	73.98	-20.19
12310.00	Avg	H	-	-	-80.86	18.75	44.89	53.98	-9.09
12310.00	Peak	H	-	-	-69.29	18.75	56.46	73.98	-17.52

Table 7-29. Radiated Measurements SISO ANT2 (26 Tones- CLOSED)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	100	331	-76.22	8.84	39.62	53.98	-14.36
4824.00	Peak	H	100	331	-65.58	8.84	50.26	73.98	-23.72
12060.00	Avg	H	-	-	-79.88	21.88	49.00	53.98	-4.98
12060.00	Peak	H	-	-	-69.44	21.88	59.44	73.98	-14.54

Table 7-30. Radiated Measurements SISO ANT2 (242 Tones- CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 79 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	122	346	-76.34	8.39	39.05	53.98	-14.93
4874.00	Peak	H	122	346	-65.35	8.39	50.04	73.98	-23.94
7311.00	Avg	H	-	-	-79.27	14.07	41.80	53.98	-12.18
7311.00	Peak	H	-	-	-68.35	14.07	52.72	73.98	-21.26
12185.00	Avg	H	-	-	-80.36	21.73	48.37	53.98	-5.61
12185.00	Peak	H	-	-	-69.03	21.73	59.70	73.98	-14.28

Table 7-31. Radiated Measurements SISO ANT2 (242 Tones- CLOSED)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	162	333	-76.90	8.79	38.89	53.98	-15.09
4924.00	Peak	H	162	333	-65.69	8.79	50.10	73.98	-23.88
7386.00	Avg	H	-	-	-79.79	13.59	40.80	53.98	-13.18
7386.00	Peak	H	-	-	-67.67	13.59	52.92	73.98	-21.06
12310.00	Avg	H	-	-	-80.94	21.90	47.96	53.98	-6.02
12310.00	Peak	H	-	-	-69.93	21.90	58.97	73.98	-15.01

Table 7-32. Radiated Measurements SISO ANT2 (242 Tones- CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
			Page 80 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	142	54	-73.68	8.79	42.11	53.98	-11.87
4924.00	Peak	H	142	54	-62.90	8.79	52.89	73.98	-21.09
7386.00	Avg	H	-	-	-82.60	13.59	37.99	53.98	-15.99
7386.00	Peak	H	-	-	-70.70	13.59	49.89	73.98	-24.09
12310.00	Avg	H	-	-	-84.10	21.90	44.80	53.98	-9.18
12310.00	Peak	H	-	-	-73.22	21.90	55.68	73.98	-18.30

Table 7-33. Radiated Measurements SISO ANT2 with WCP (26 Tones- CLOSED)


FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 81 of 115

7.7.3 MIMO Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

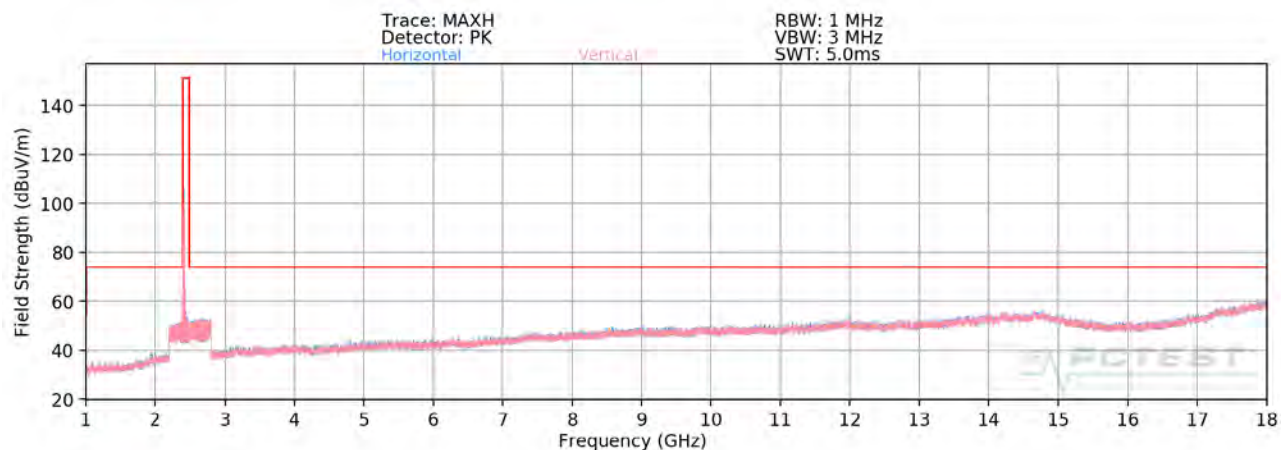

Plot 7-81. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 1 – CLOSED)

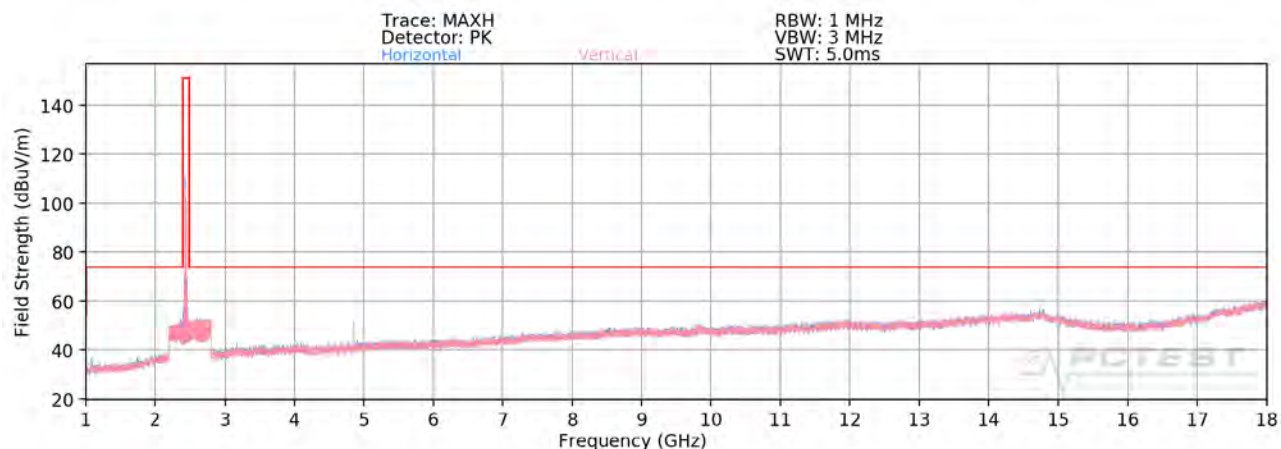


Plot 7-82. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 6 – CLOSED)

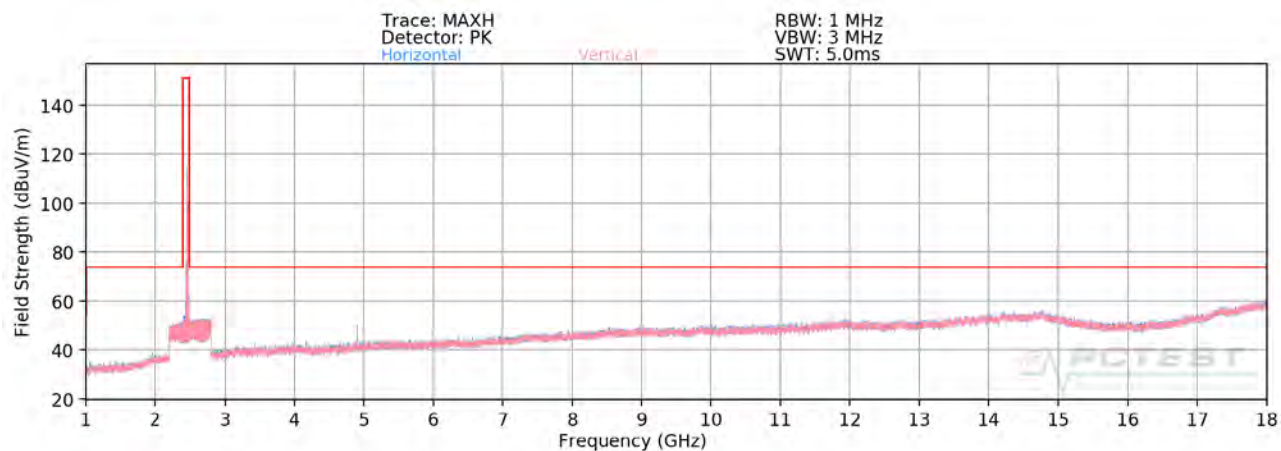


Plot 7-83. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 11 – CLOSED)


FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 82 of 115

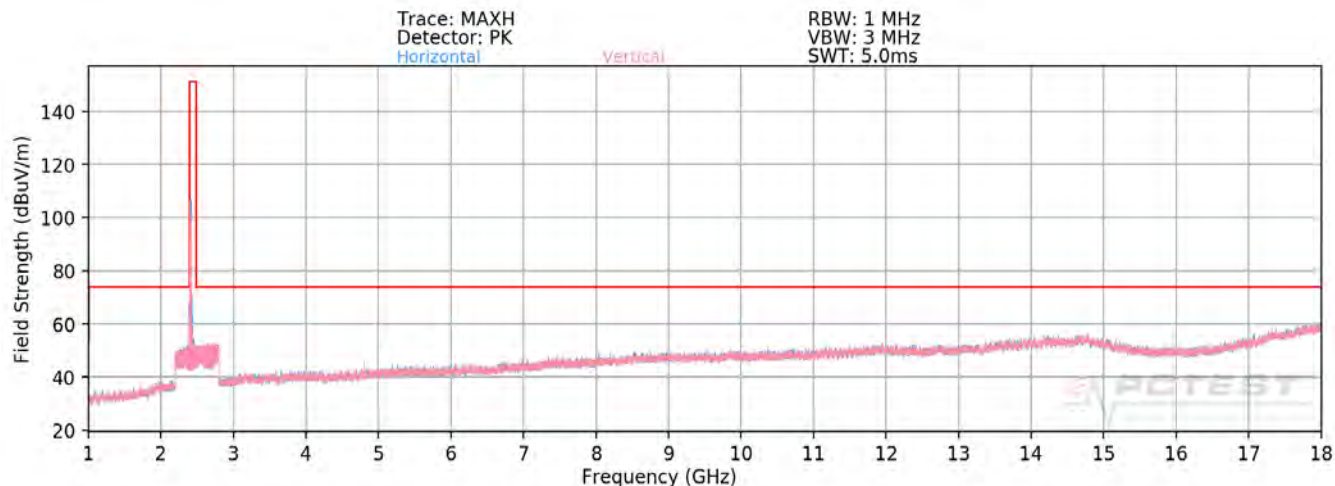

Plot 7-84. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 1 – CLOSED)

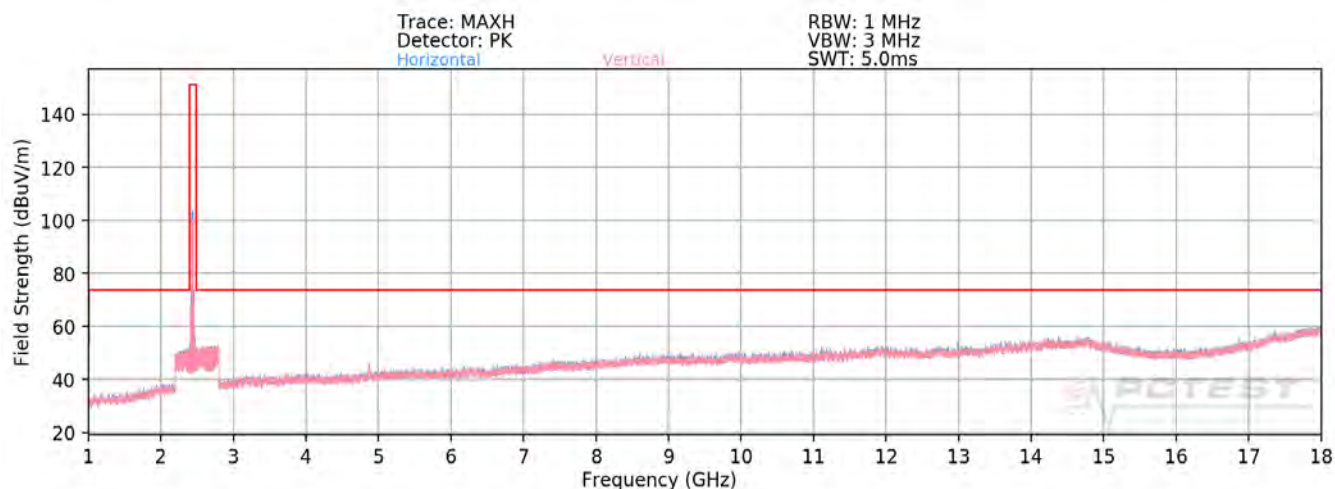

Plot 7-85. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 6 – CLOSED)

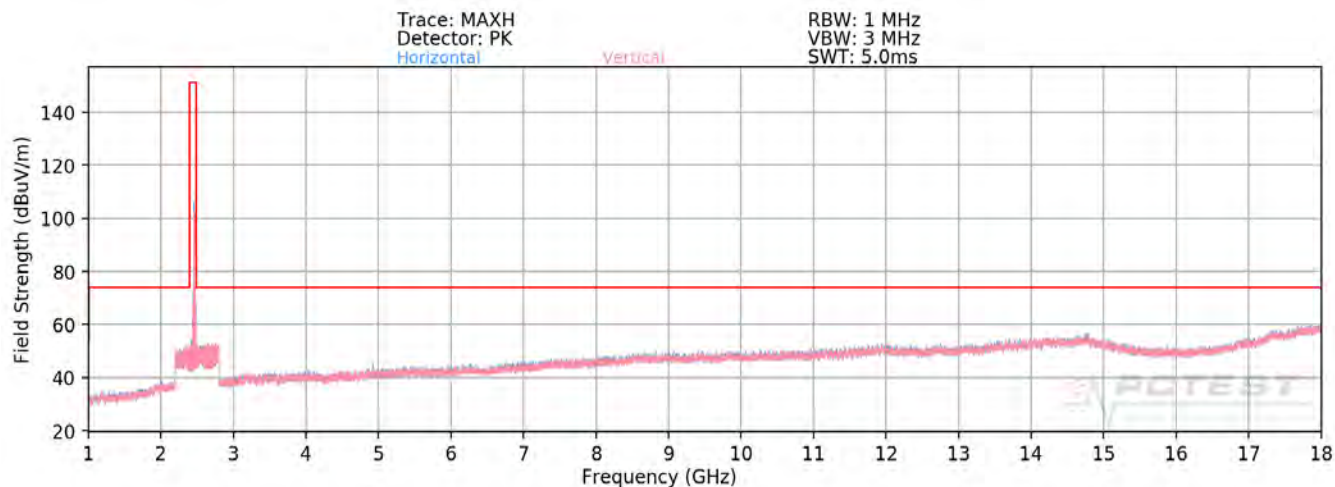


Plot 7-86. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 11 – CLOSED)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 83 of 115

MIMO/CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

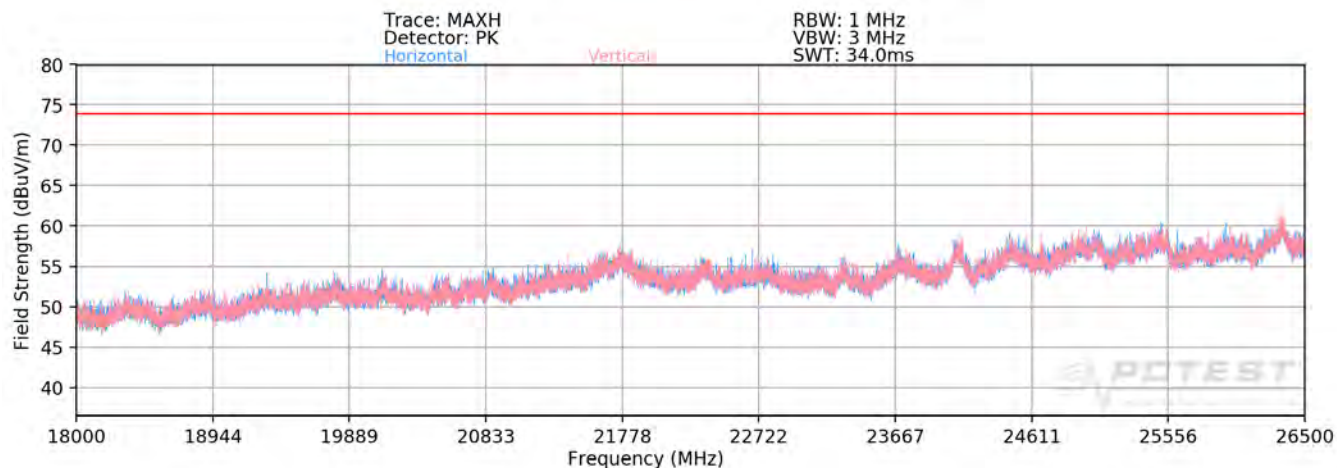

Plot 7-87. Radiated Spurious Plot above 18GHz MIMO (802.11ax OFDMA – 26 Tones – CLOSED)

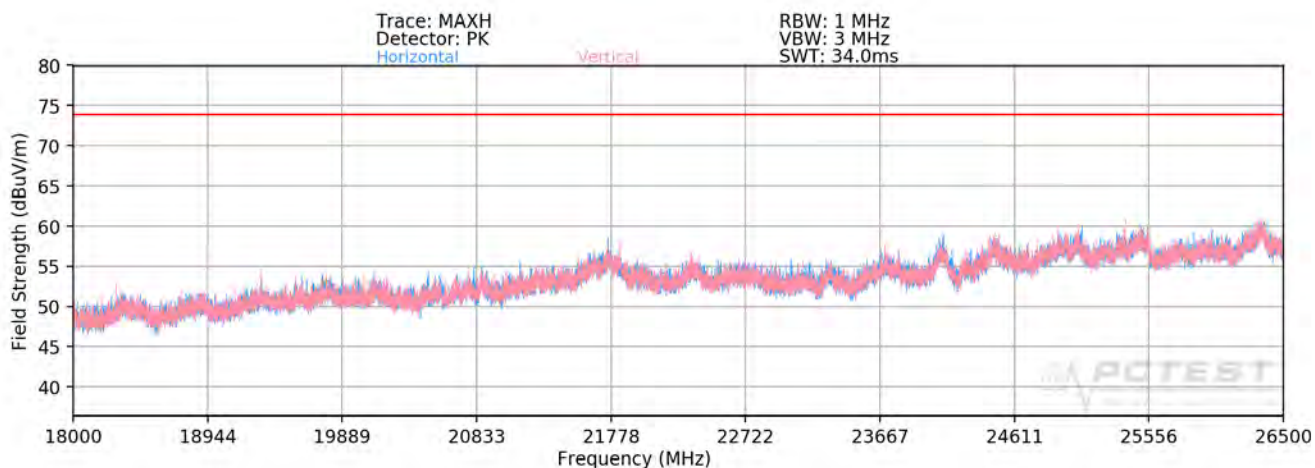

Plot 7-88. Radiated Spurious Plot above 18GHz MIMO (802.11ax OFDMA – 242 Tones – CLOSED)

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 84 of 115

MIMO Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 53
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	179	320	-78.39	7.06	35.67	53.98	-18.31
4824.00	Peak	H	179	320	-66.77	7.06	47.29	73.98	-26.69
12060.00	Avg	H	-	-	-80.58	17.99	44.41	53.98	-9.57
12060.00	Peak	H	-	-	-68.73	17.99	56.26	73.98	-17.72

Table 7-34. Radiated Measurements MIMO (26 Tones- CLOSED)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 53
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	193	333	-78.38	7.46	36.08	53.98	-17.90
4874.00	Peak	H	193	333	-66.71	7.46	47.75	73.98	-26.23
7311.00	Avg	H	-	-	-79.35	12.07	39.72	53.98	-14.26
7311.00	Peak	H	-	-	-66.69	12.07	52.38	73.98	-21.60
12185.00	Avg	H	-	-	-80.49	18.70	45.21	53.98	-8.77
12185.00	Peak	H	-	-	-69.91	18.70	55.79	73.98	-18.19

Table 7-35. Radiated Measurements MIMO (26 Tones- CLOSED)

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 85 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	160	336	-78.38	7.08	35.70	53.98	-18.28
4924.00	Peak	H	160	336	-65.96	7.08	48.12	73.98	-25.86
7386.00	Avg	H	-	-	-79.22	11.90	39.68	53.98	-14.30
7386.00	Peak	H	-	-	-67.01	11.90	51.89	73.98	-22.09
12310.00	Avg	H	-	-	-80.87	18.75	44.88	53.98	-9.10
12310.00	Peak	H	-	-	-68.22	18.75	57.53	73.98	-16.45

Table 7-36. Radiated Measurements MIMO (26 Tones- CLOSED)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	251	313	-77.99	8.84	37.85	53.98	-16.13
4824.00	Peak	H	251	313	-66.81	8.84	49.03	73.98	-24.95
12060.00	Avg	H	-	-	-79.88	21.88	49.00	53.98	-4.98
12060.00	Peak	H	-	-	-69.66	21.88	59.22	73.98	-14.76

Table 7-37. Radiated Measurements MIMO (242 Tones- CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
			Page 86 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	106	347	-77.17	8.39	38.22	53.98	-15.76
4874.00	Peak	H	106	347	-66.63	8.39	48.76	73.98	-25.22
7311.00	Avg	H	-	-	-79.39	14.07	41.68	53.98	-12.30
7311.00	Peak	H	-	-	-68.05	14.07	53.02	73.98	-20.96
12185.00	Avg	H	-	-	-80.60	21.73	48.13	53.98	-5.85
12185.00	Peak	H	-	-	-69.30	21.73	59.43	73.98	-14.55

Table 7-38. Radiated Measurements MIMO (242 Tones- CLOSED)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	190	347	-78.29	8.79	37.50	53.98	-16.48
4924.00	Peak	H	190	347	-66.97	8.79	48.82	73.98	-25.16
7386.00	Avg	H	-	-	-79.31	13.59	41.28	53.98	-12.70
7386.00	Peak	H	-	-	-68.01	13.59	52.58	73.98	-21.40
12310.00	Avg	H	-	-	-81.09	21.90	47.81	53.98	-6.17
12310.00	Peak	H	-	-	-69.73	21.90	59.17	73.98	-14.81

Table 7-39. Radiated Measurements MIMO (242 Tones- CLOSED)

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
			Page 87 of 115

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	244	32	-76.77	8.79	39.02	53.98	-14.96
4924.00	Peak	H	244	32	-64.18	8.79	51.61	73.98	-22.37
7386.00	Avg	H	-	-	-82.43	13.59	38.16	53.98	-15.82
7386.00	Peak	H	-	-	-71.70	13.59	48.89	73.98	-25.09
12310.00	Avg	H	-	-	-84.15	21.90	44.75	53.98	-9.23
12310.00	Peak	H	-	-	-73.50	21.90	55.40	73.98	-18.58

Table 7-40. Radiated Measurements MIMO with WCP (106 Tones- CLOSED)


FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	
Page 88 of 115			

7.7.4 SISO Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

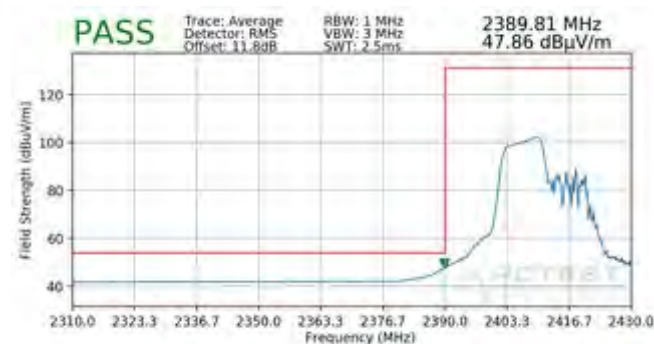


Plot 7-89. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average - 106 Tones)




Plot 7-90. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak - 106 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

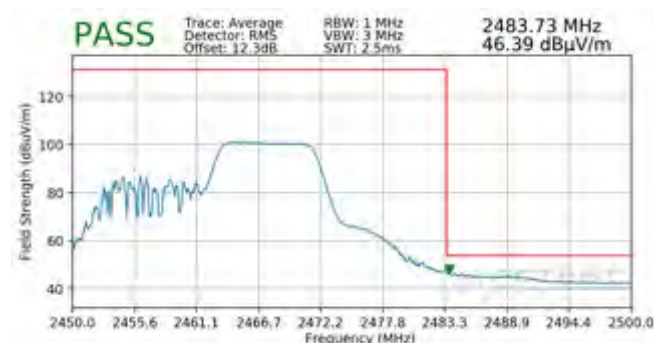


Plot 7-91. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average - 106 Tones)

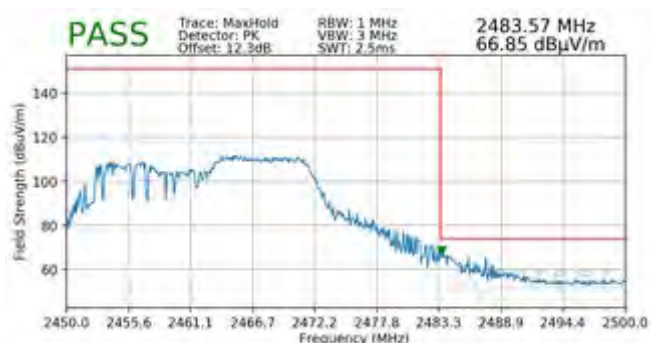


Plot 7-92. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak - 106 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 89 of 115

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 54
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

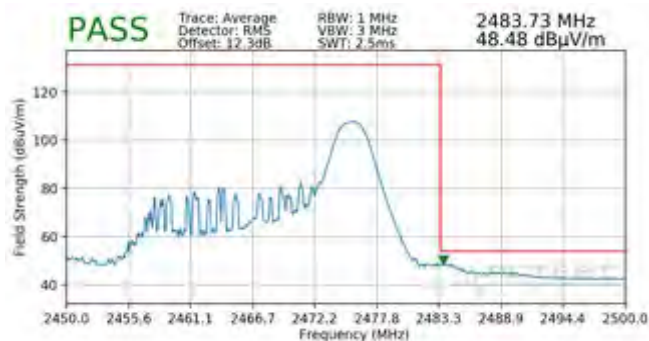


Plot 7-93. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 26 Tones)

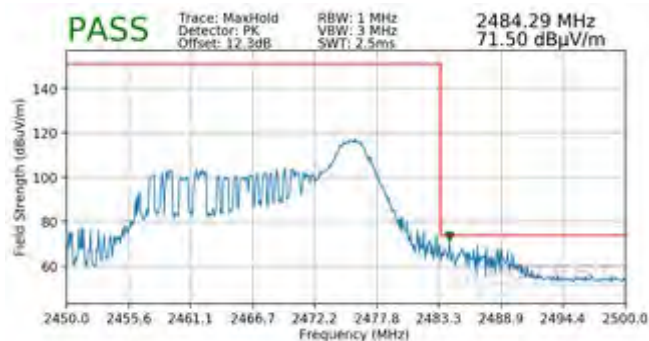

Plot 7-94. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 26 Tones)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 54
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

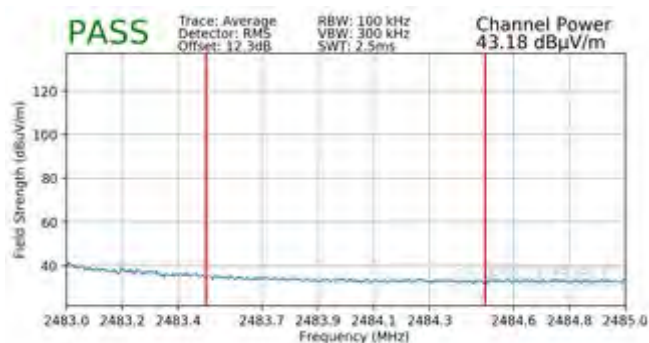

Plot 7-95. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 26 Tones)




Plot 7-96. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 26 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 90 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1




Plot 7-97. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average - 242 Tones)

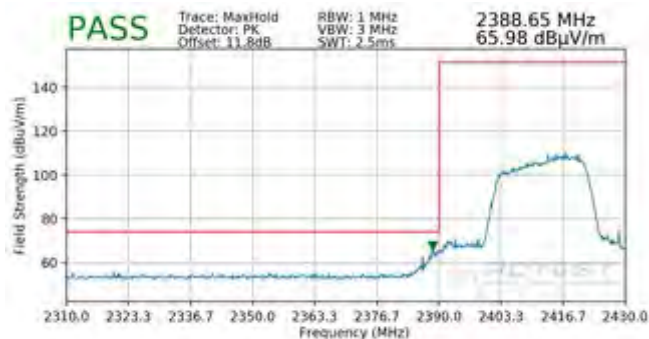


Plot 7-98. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak - 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

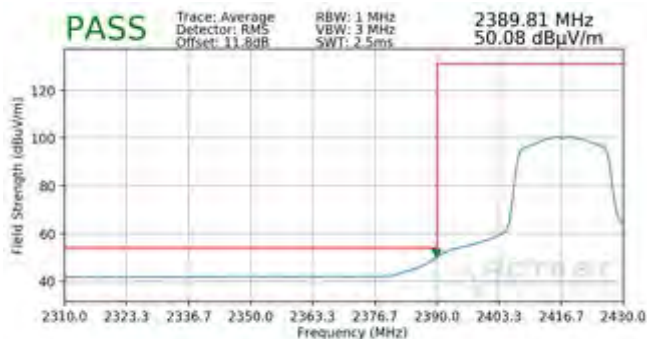

Plot 7-99. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average - 242 Tones)

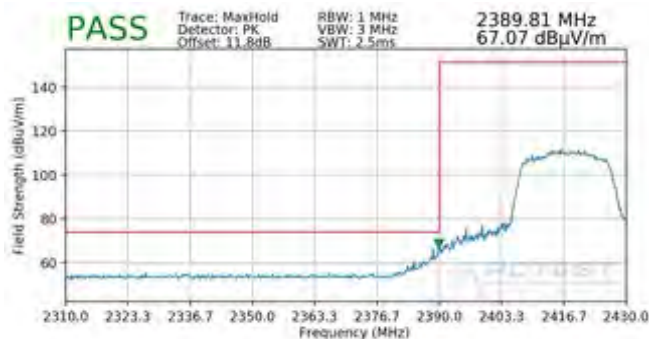


Plot 7-100. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak - 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 91 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2427MHz
Channel:	3




Plot 7-101. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 242 Tones)

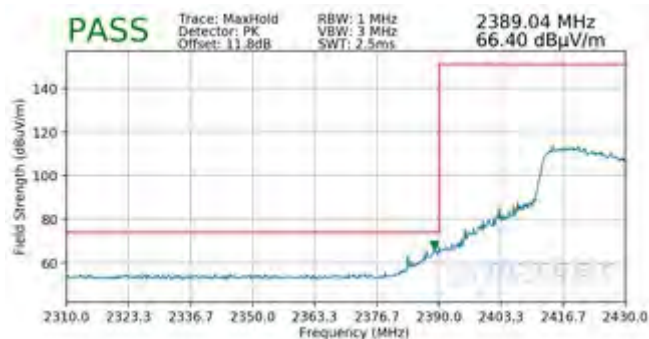


Plot 7-102. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2427MHz
Channel:	4

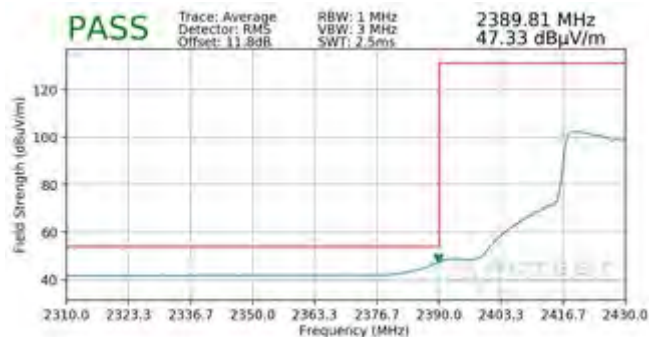

Plot 7-103. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 242 Tones)

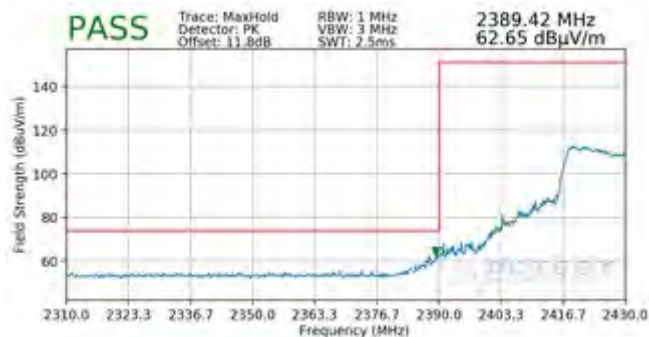


Plot 7-104. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 92 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2452MHz
Channel:	9



Plot 7-105. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 242 Tones)

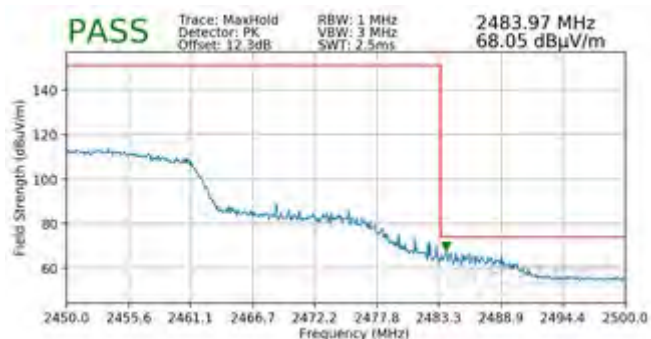


Plot 7-106. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10




Plot 7-107. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 242 Tones)

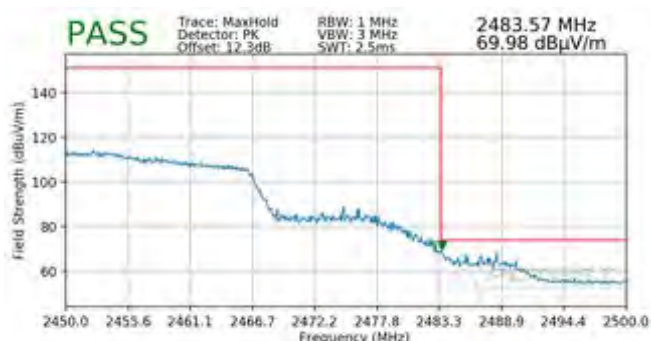


Plot 7-108. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 242 Tones)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 93 of 115

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

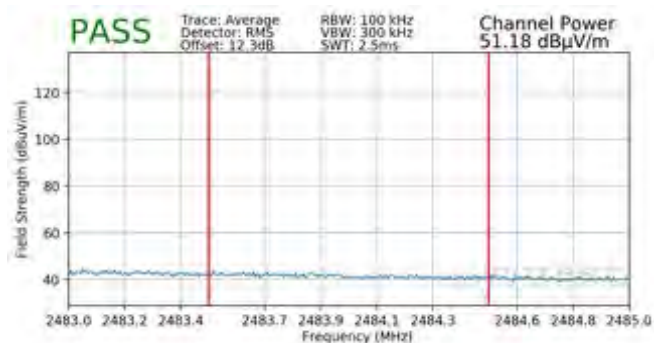


Plot 7-109. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average - 242 Tones)

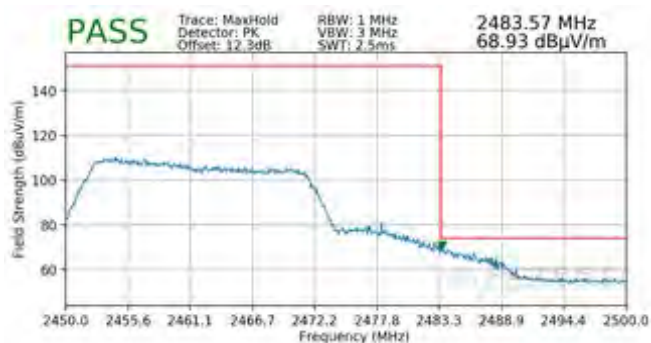


Plot 7-110. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak - 242 Tones)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

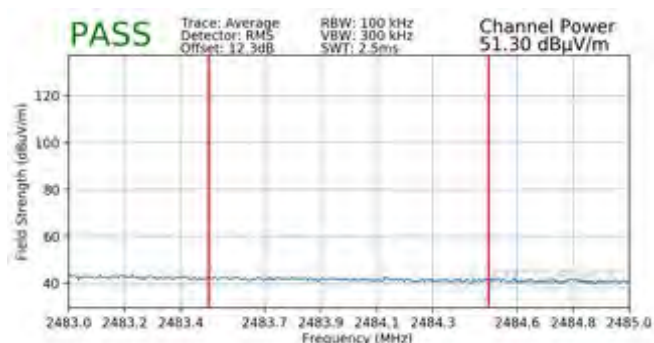


Plot 7-111. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average - 242 Tones)

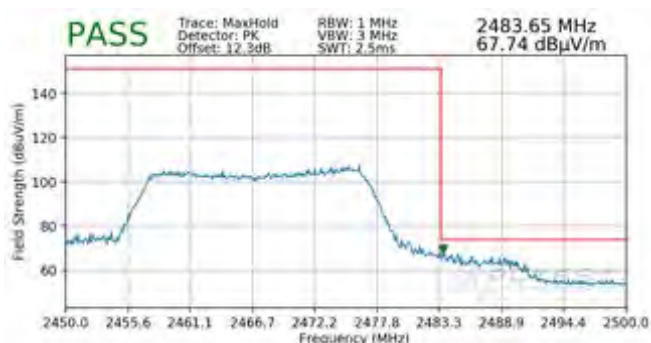


Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak - 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 94 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

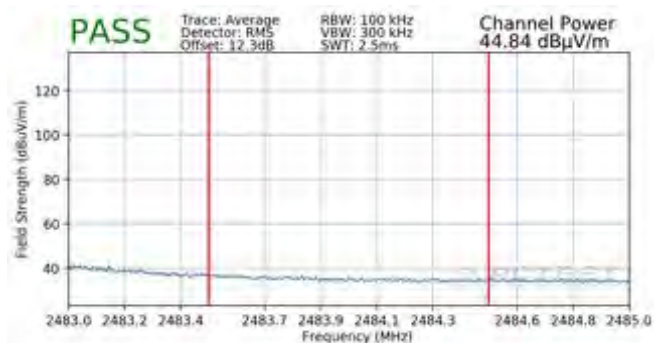


Plot 7-113. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 242 Tones)

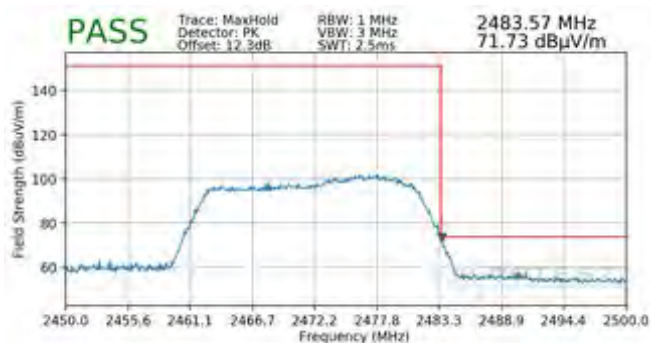


Plot 7-114. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

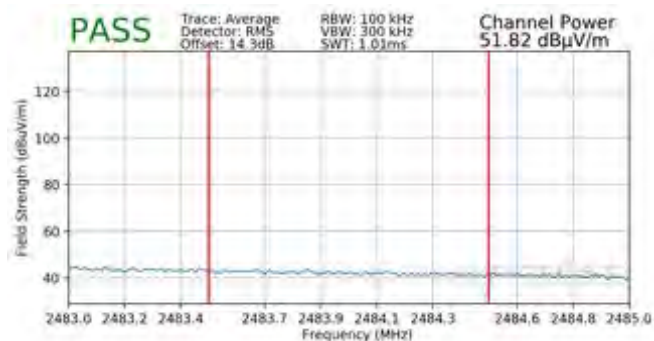

Plot 7-115. Radiated Restricted Band Edge Measurement SISO ANT1 with WCP (Average – 242 Tones)

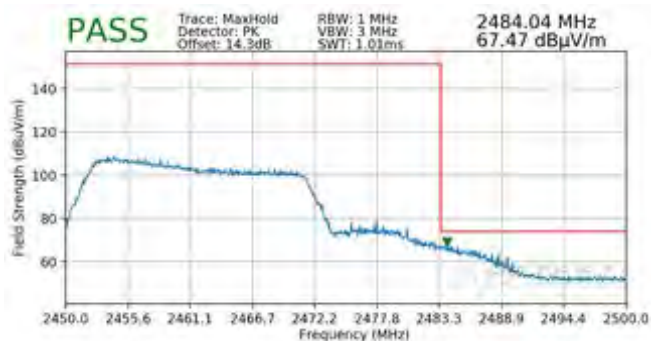

Plot 7-116. Radiated Restricted Band Edge Measurement SISO ANT1 with WCP (Peak – 242 Tones)


FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 95 of 115

7.7.5 SISO Antenna-2 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

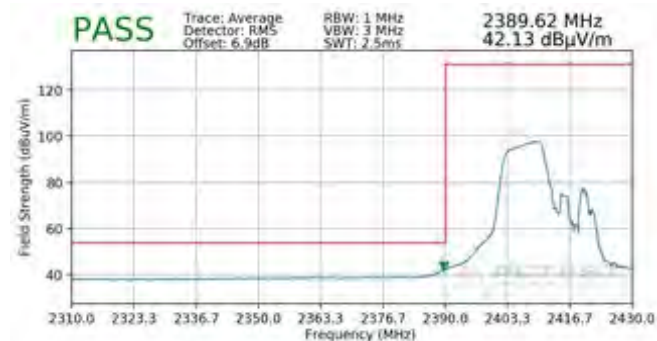

Plot 7-117. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average - 106 Tones)

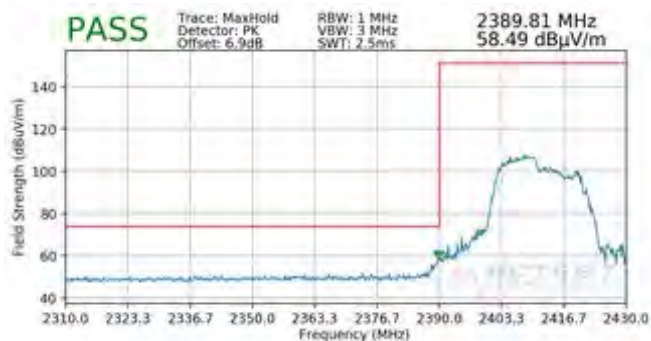

Plot 7-118. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak - 106 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11




Plot 7-119. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average - 106 Tones)




Plot 7-120. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak - 106 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 96 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

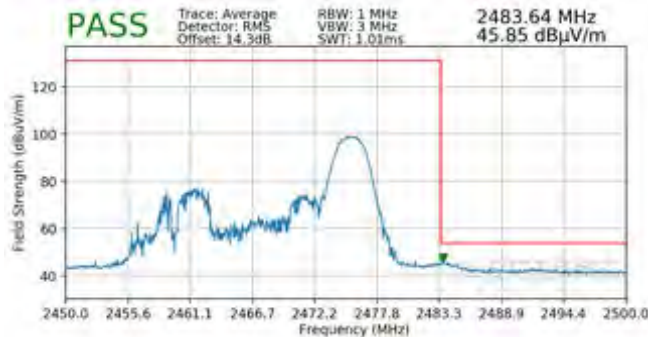


Plot 7-121. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 26 Tones)

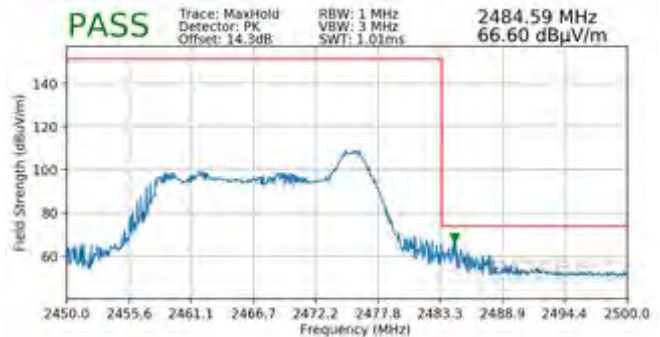


Plot 7-122. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 26 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

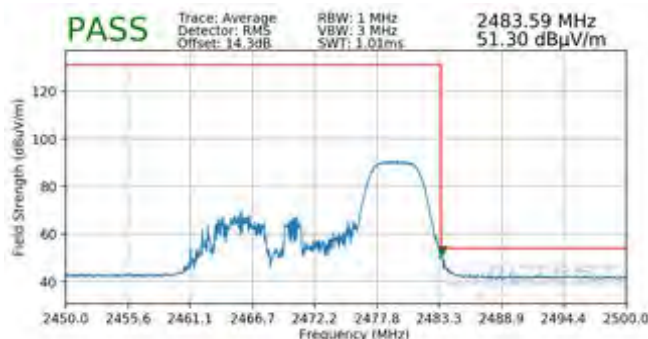


Plot 7-123. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 52 Tones)

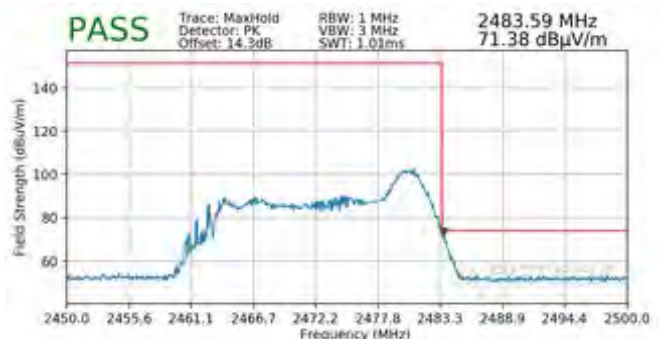

Plot 7-124. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 26 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 97 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

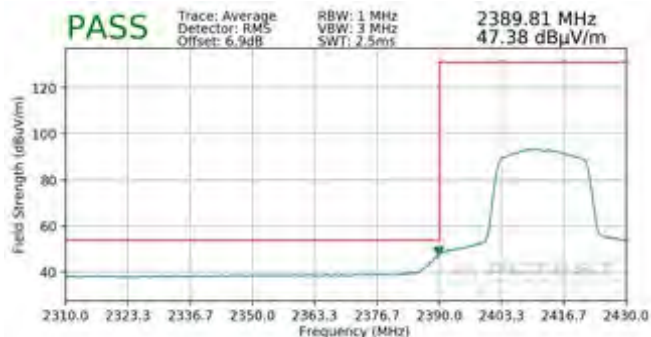


Plot 7-125. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average - 242 Tones)




Plot 7-126. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak - 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

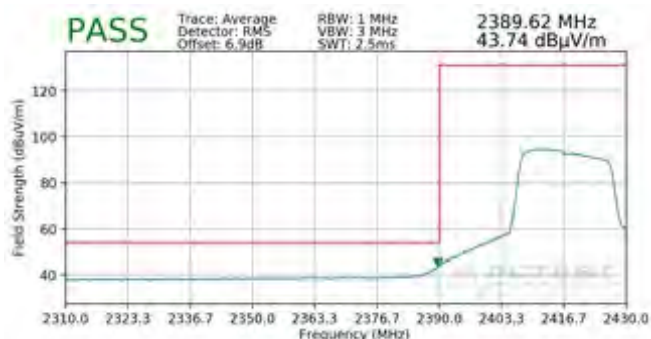

Plot 7-127. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average - 242 Tones)

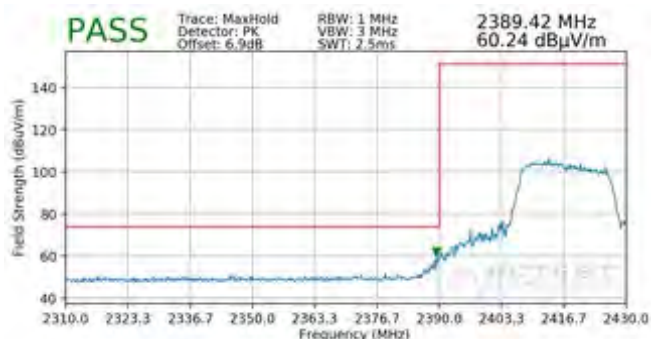


Plot 7-128. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak - 242 Tones)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 98 of 115	

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10




Plot 7-129. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average - 242 Tones)

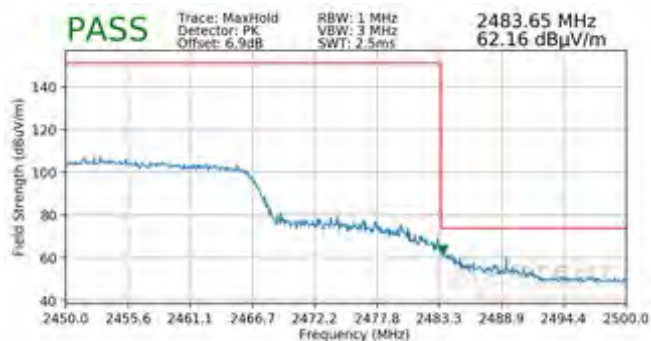


Plot 7-130. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak - 242 Tones)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

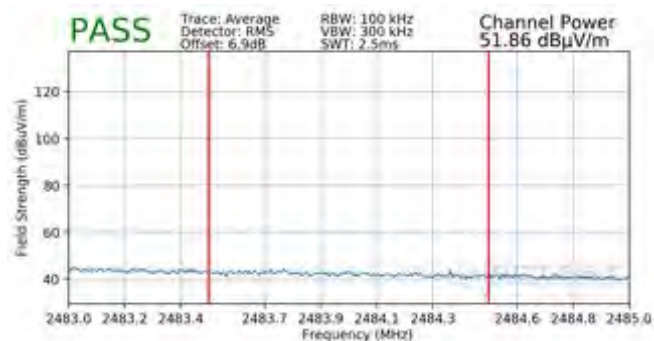

Plot 7-131. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average - 242 Tones)

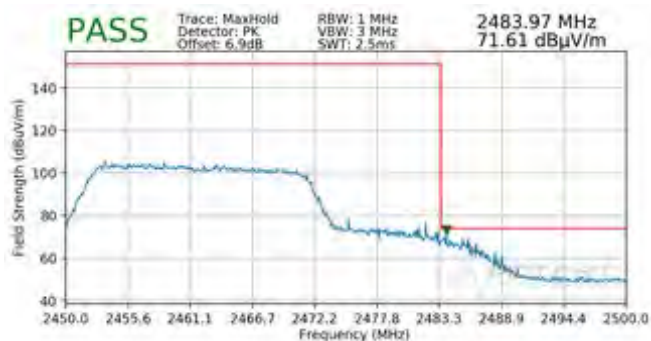


Plot 7-132. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak - 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 99 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12




Plot 7-133. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 242 Tones)

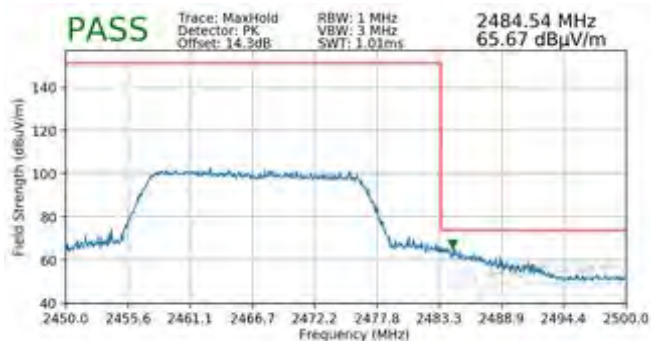


Plot 7-134. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

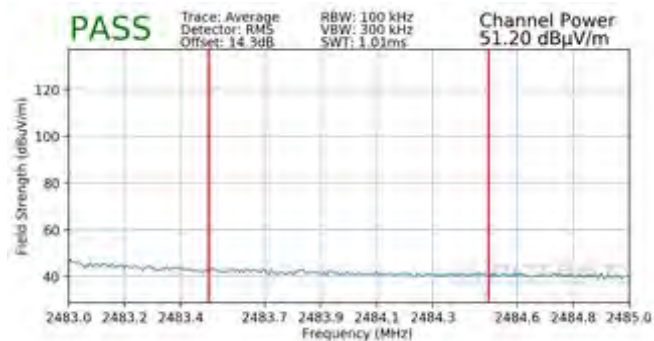


Plot 7-135. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 242 Tones)

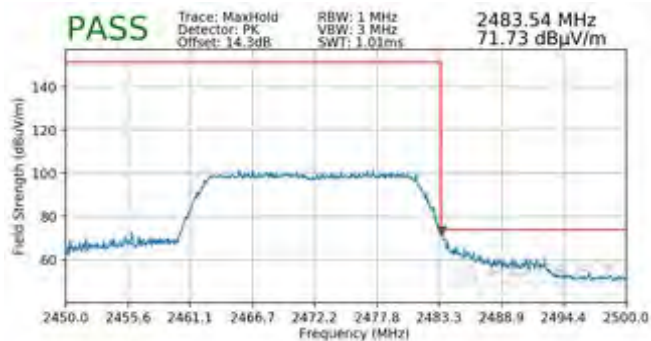


Plot 7-136. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 100 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

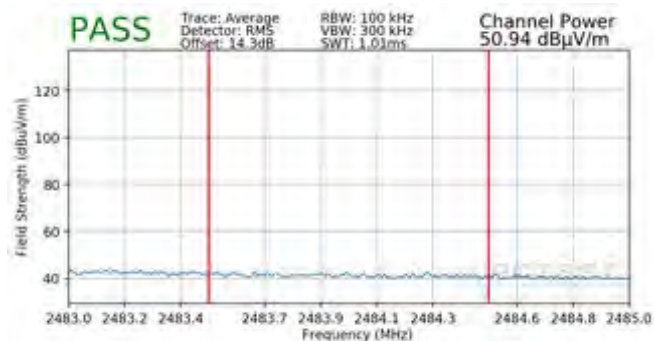

Plot 7-137. Radiated Restricted Band Edge Measurement SISO ANT2 with WCP (Average – 242 Tones)

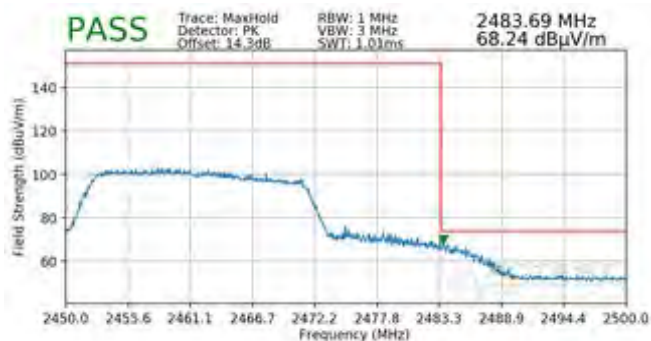

Plot 7-138. Radiated Restricted Band Edge Measurement SISO ANT2 with WCP (Peak – 242 Tones)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 101 of 115

7.7.6 MIMO Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

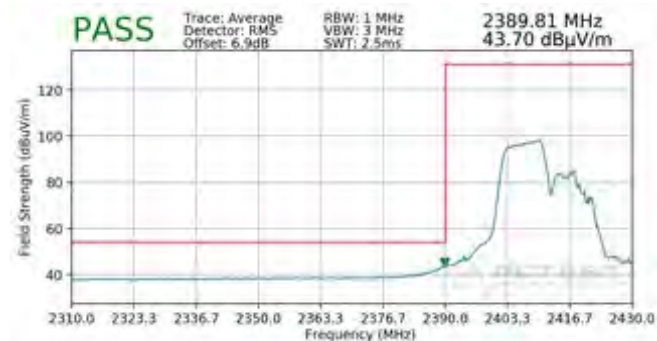


Plot 7-139. Radiated Restricted Lower Band Edge Measurement MIMO (Average - 106 Tones)

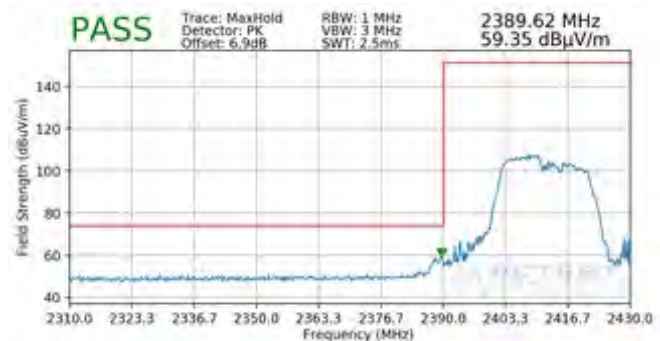


Plot 7-140. Radiated Restricted Lower Band Edge Measurement MIMO (Peak - 106 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

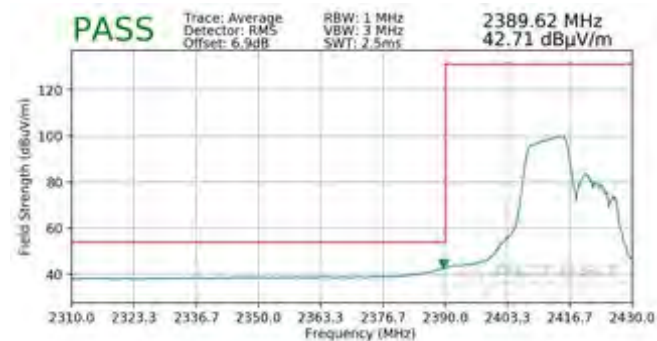

Plot 7-141. Radiated Restricted Lower Band Edge Measurement MIMO (Average - 106 Tones)

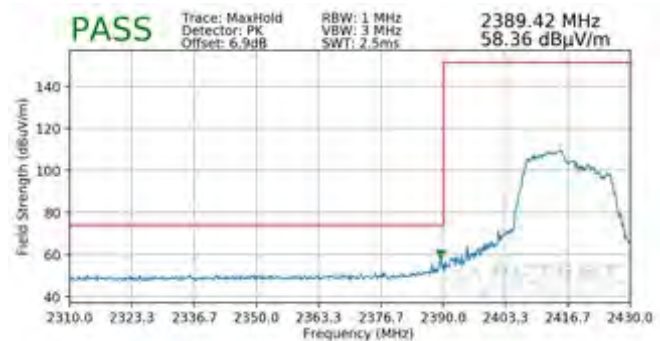


Plot 7-142. Radiated Restricted Lower Band Edge Measurement MIMO (Peak - 106 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 102 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10



Plot 7-143. Radiated Restricted Upper Band Edge Measurement MIMO (Average - 106 Tones)

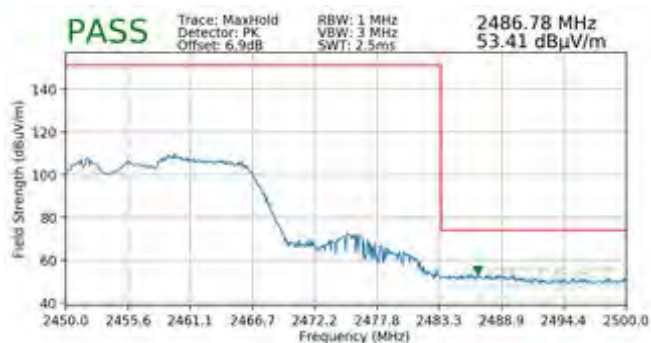


Plot 7-144. Radiated Restricted Upper Band Edge Measurement MIMO (Peak - 106 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11




Plot 7-145. Radiated Restricted Upper Band Edge Measurement MIMO (Average - 106 Tones)

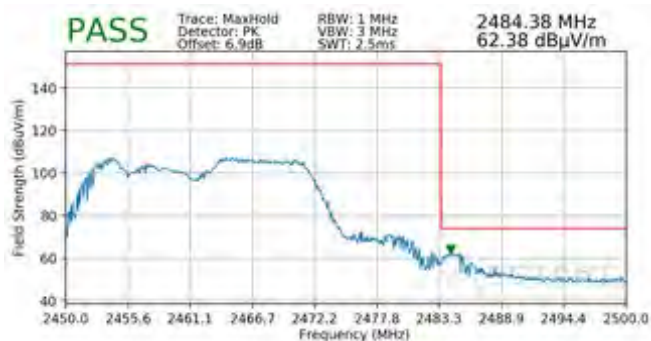


Plot 7-146. Radiated Restricted Upper Band Edge Measurement MIMO (Peak - 106 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 103 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

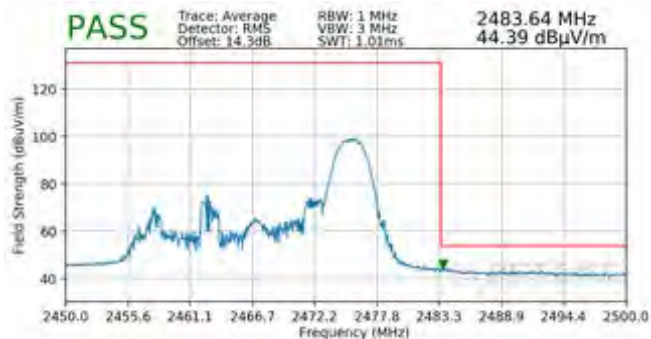


Plot 7-147. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 26 Tones)

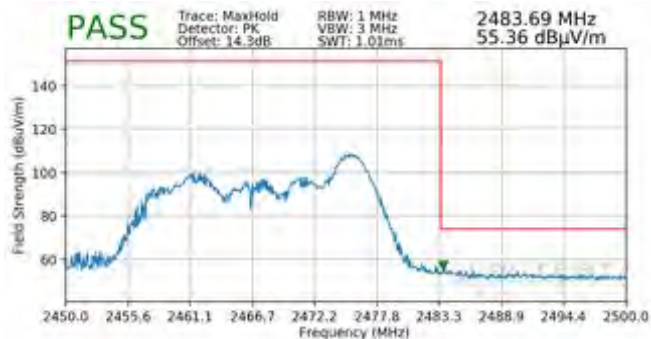


Plot 7-148. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 26 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

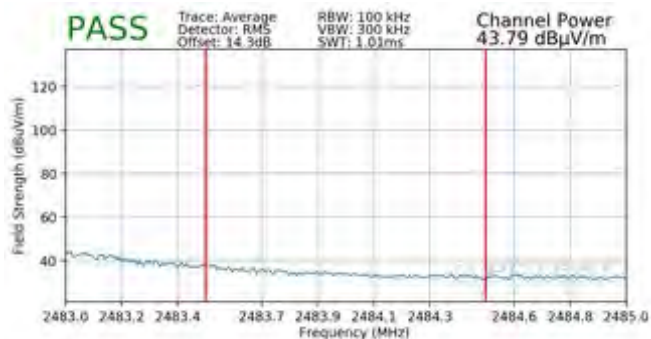


Plot 7-149. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 26 Tones)

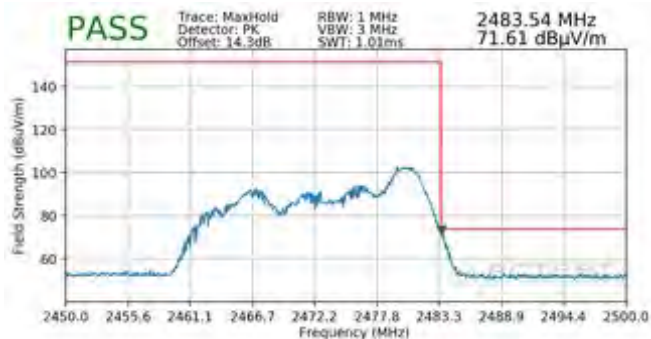

Plot 7-150. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 26 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 104 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

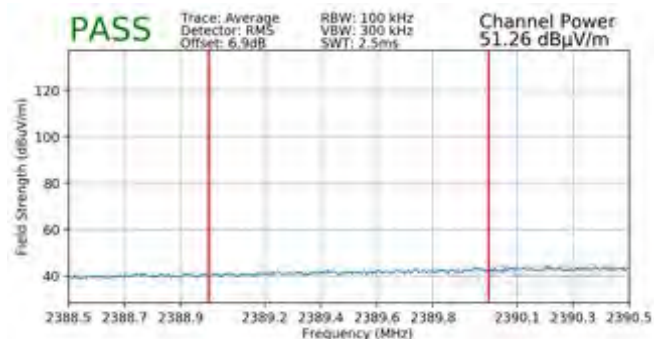


Plot 7-151. Radiated Restricted Lower Band Edge Measurement MIMO (Average - 242 Tones)




Plot 7-152. Radiated Restricted Lower Band Edge Measurement MIMO (Peak - 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

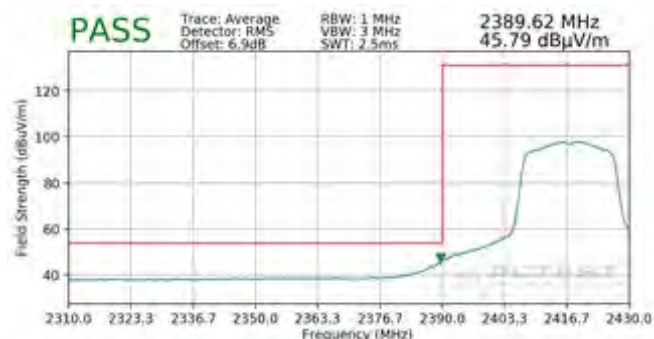

Plot 7-153. Radiated Restricted Lower Band Edge Measurement MIMO (Average - 242 Tones)

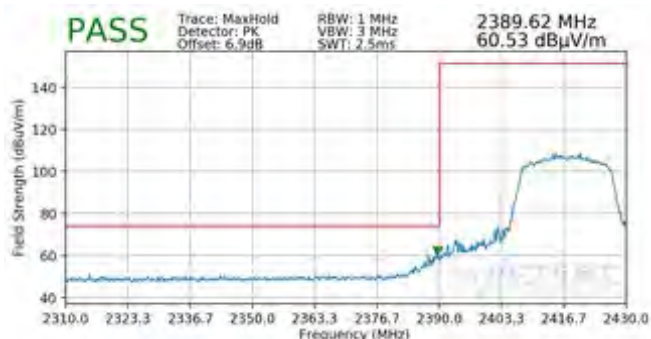


Plot 7-154. Radiated Restricted Lower Band Edge Measurement MIMO (Peak - 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 105 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10




Plot 7-155. Radiated Restricted Upper Band Edge Measurement MIMO (Average - 242 Tones)

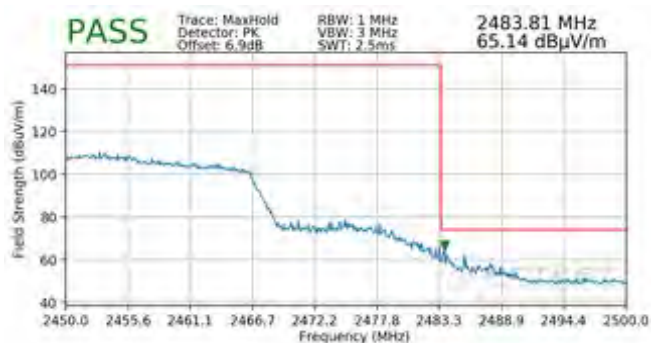


Plot 7-156. Radiated Restricted Upper Band Edge Measurement MIMO (Peak - 242 Tones)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

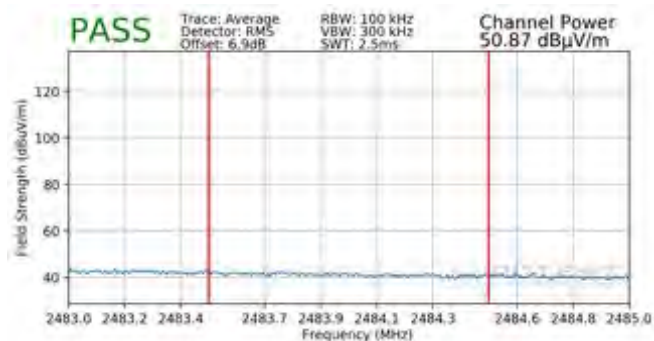


Plot 7-157. Radiated Restricted Upper Band Edge Measurement MIMO (Average - 242 Tones)

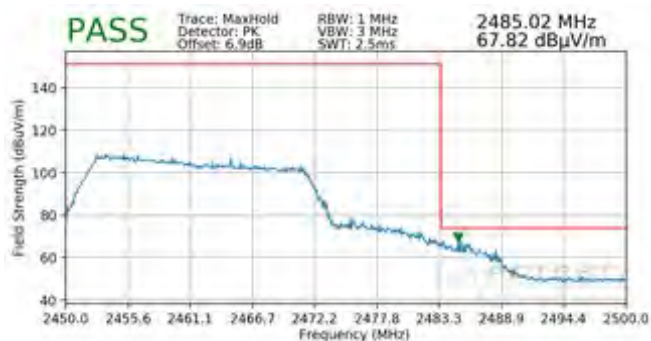


Plot 7-158. Radiated Restricted Upper Band Edge Measurement MIMO (Peak - 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 106 of 115

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 54
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

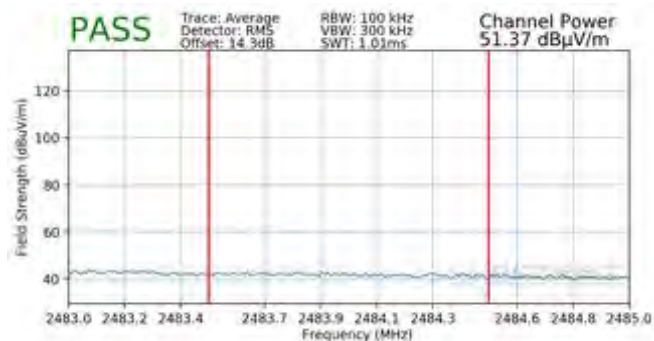


Plot 7-159. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

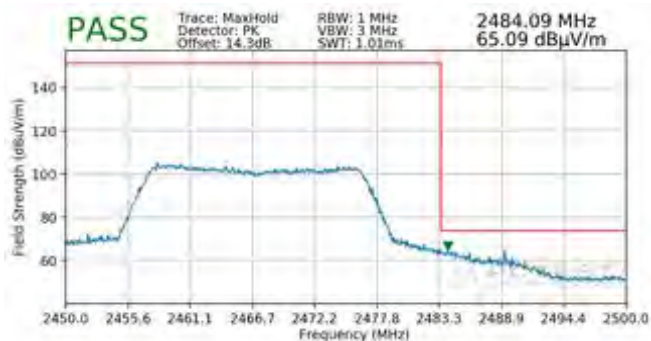


Plot 7-160. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 54
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

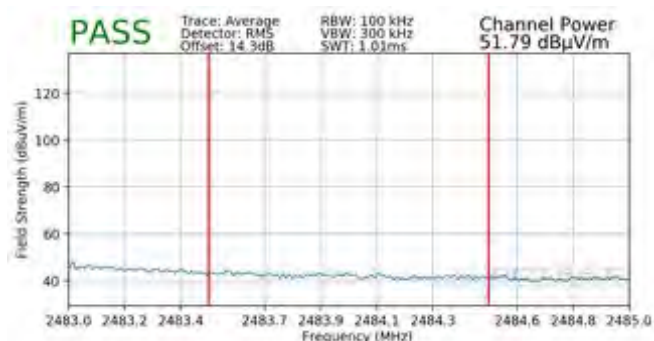


Plot 7-161. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

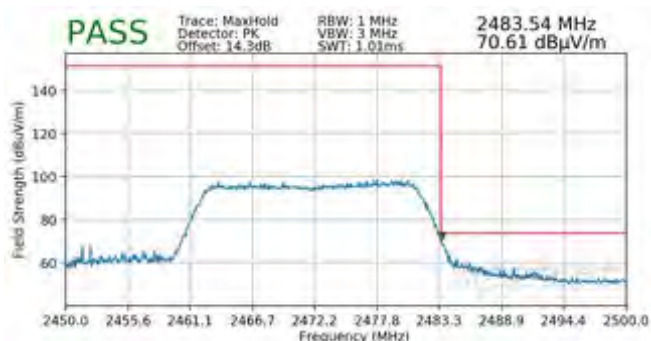


Plot 7-162. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 107 of 115

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

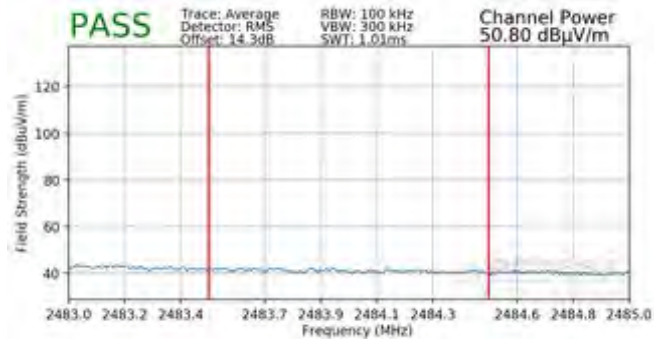

Plot 7-163. Radiated Restricted Band Edge Measurement MIMO with WCP (Average – 242 Tones)

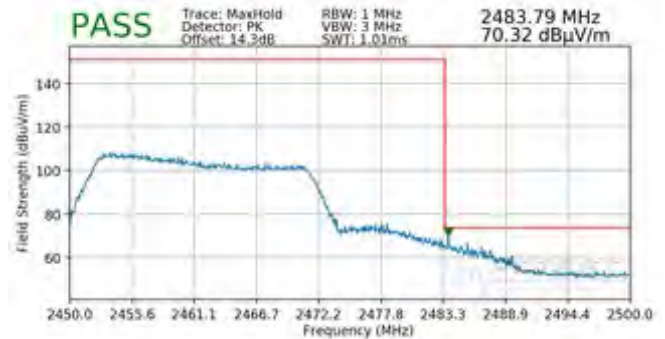

Plot 7-164. Radiated Restricted Band Edge Measurement MIMO with WCP (Peak – 242 Tones)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 108 of 115

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-41 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-41. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 109 of 115

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

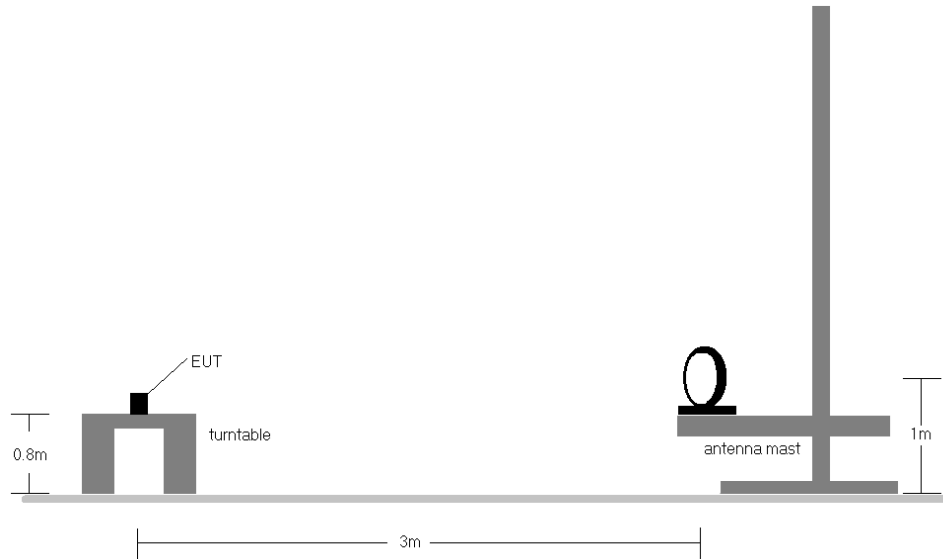


Figure 7-7. Radiated Test Setup < 30Mhz

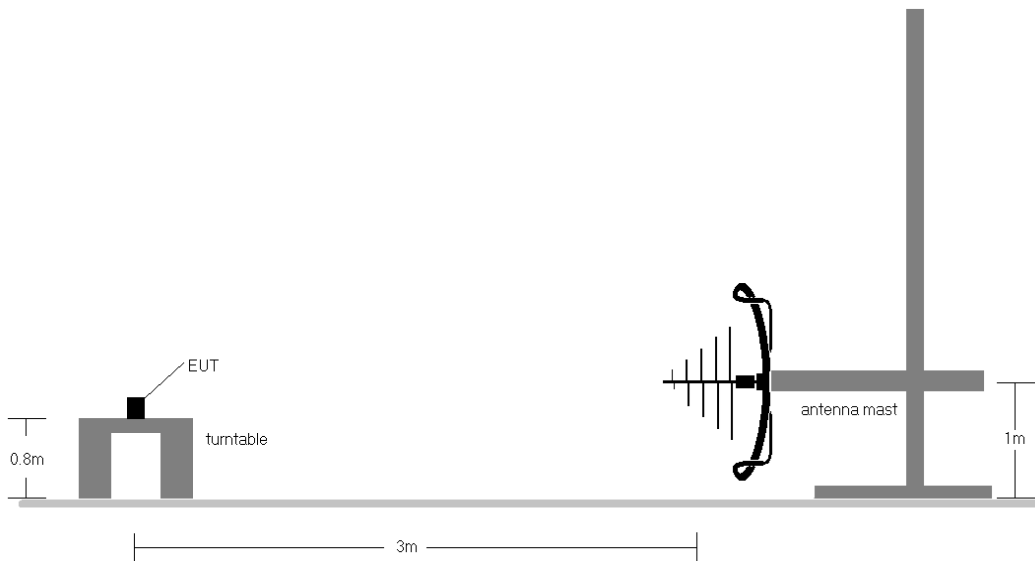


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 110 of 115


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-41.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 111 of 115

SISO Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

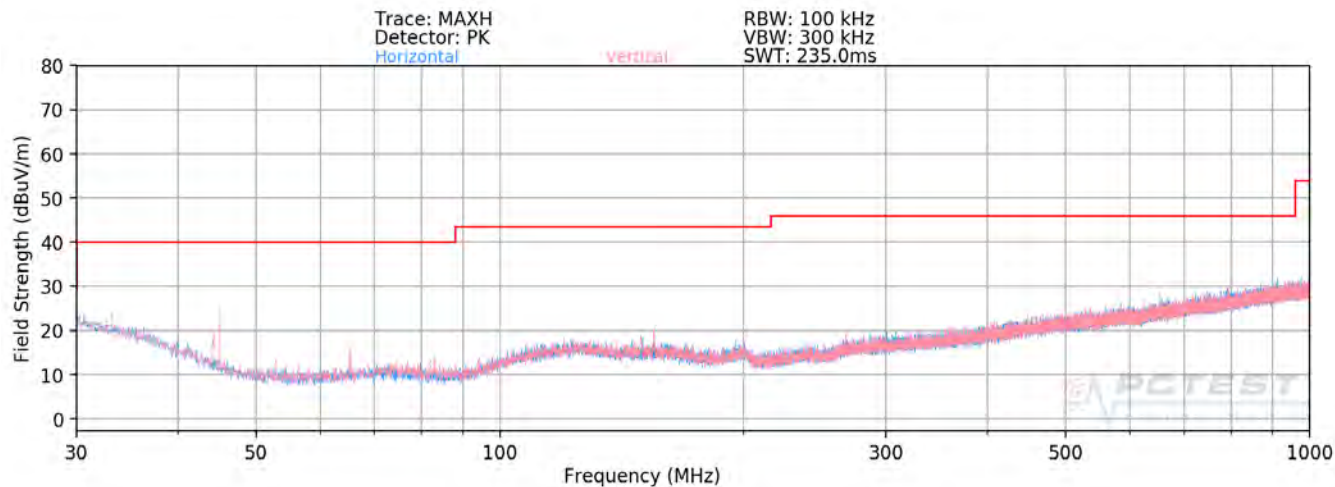

Plot 7-165. Radiated Spurious Plot below 1GHz SISO ANT1 (106 Tones - CLOSED)

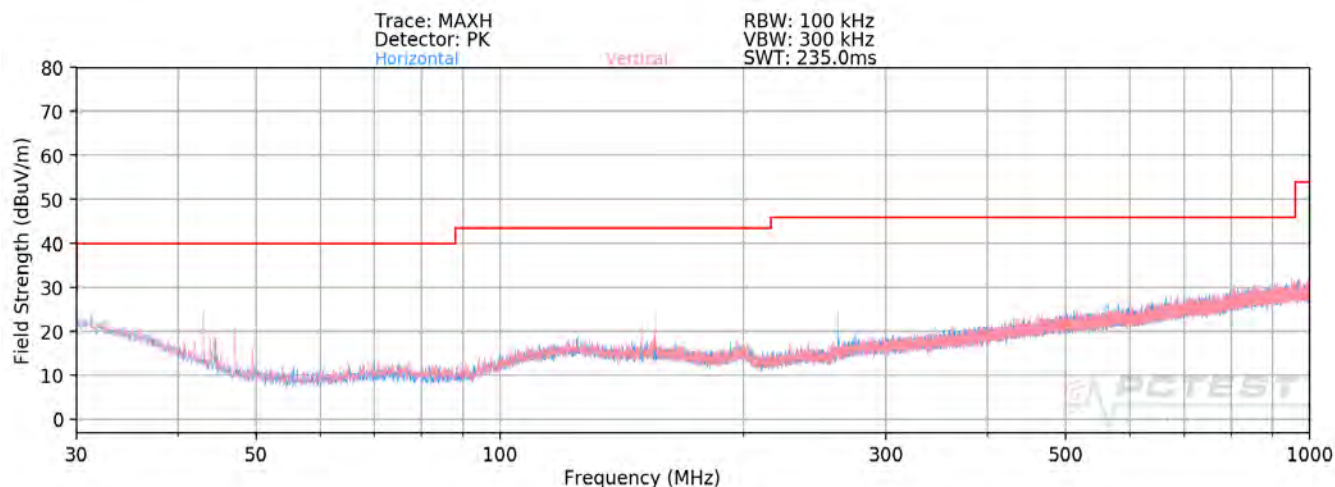


Plot 7-166. Radiated Spurious Plot below 1GHz SISO ANT1 (242 Tones - CLOSED)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 112 of 115

SISO Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

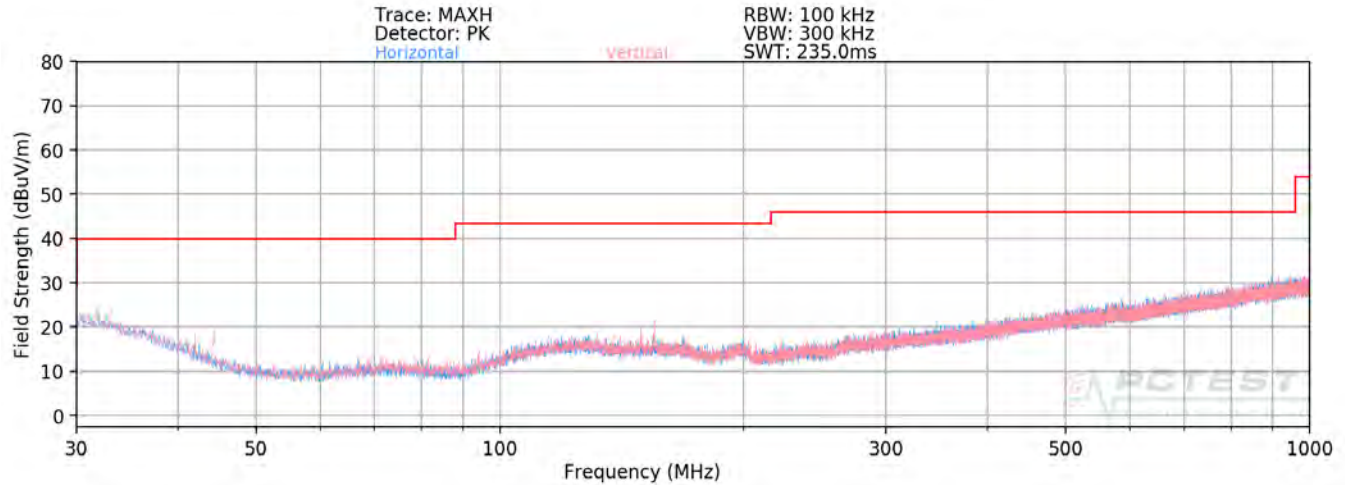

Plot 7-167. Radiated Spurious Plot below 1GHz SISO ANT2 (106 Tones - CLOSED)

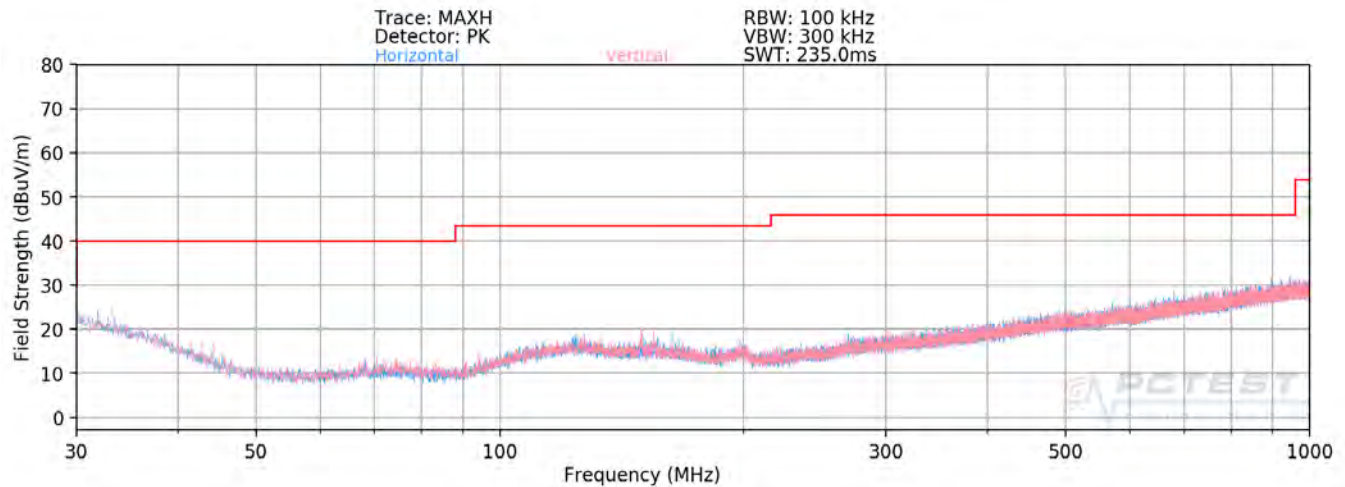


Plot 7-168. Radiated Spurious Plot below 1GHz SISO ANT2 (242 Tones - CLOSED)


FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 113 of 115

MIMO Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

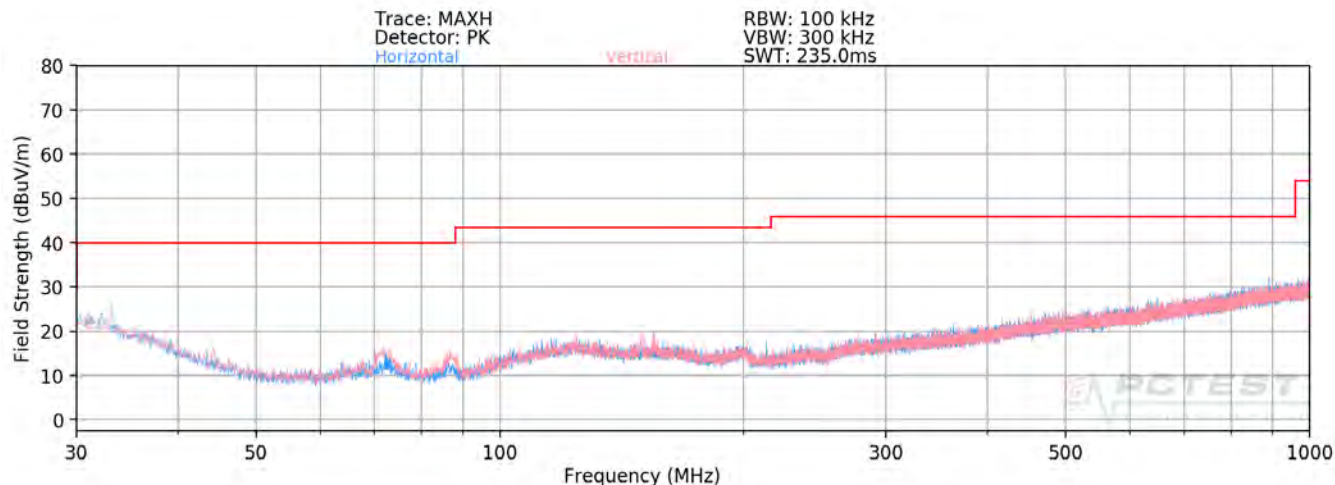

Plot 7-169. Radiated Spurious Plot below 1GHz MIMO (26 Tones - CLOSED)

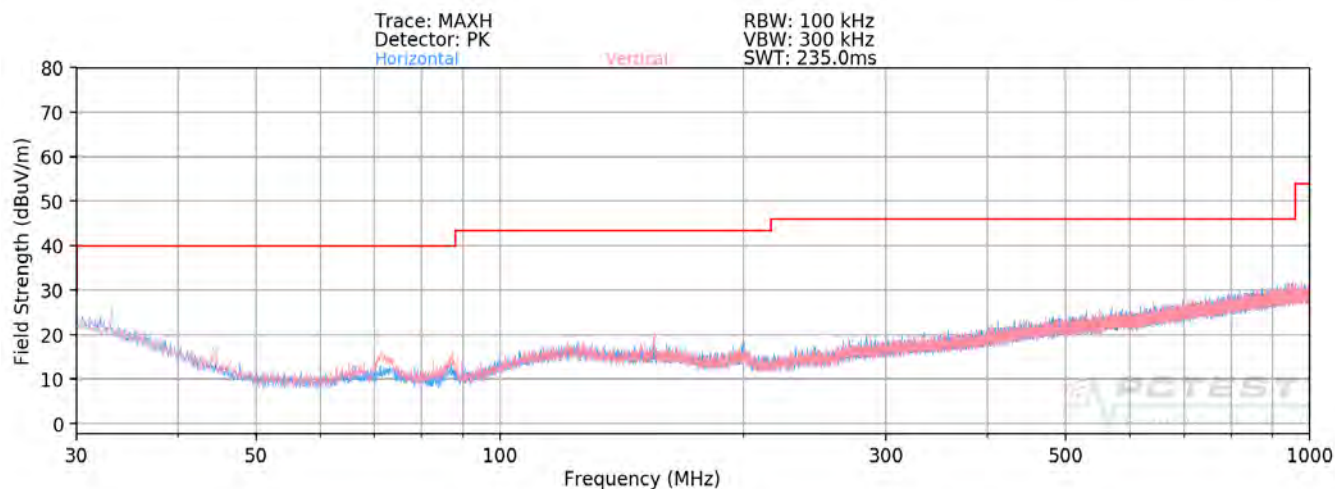

Plot 7-170. Radiated Spurious Plot below 1GHz MIMO (242 Tones - CLOSED)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset		Page 114 of 115

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF900F** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-06.A3L	Test Dates: 01/22/2019 - 03/28/2019	EUT Type: Portable Handset	Page 115 of 115	