



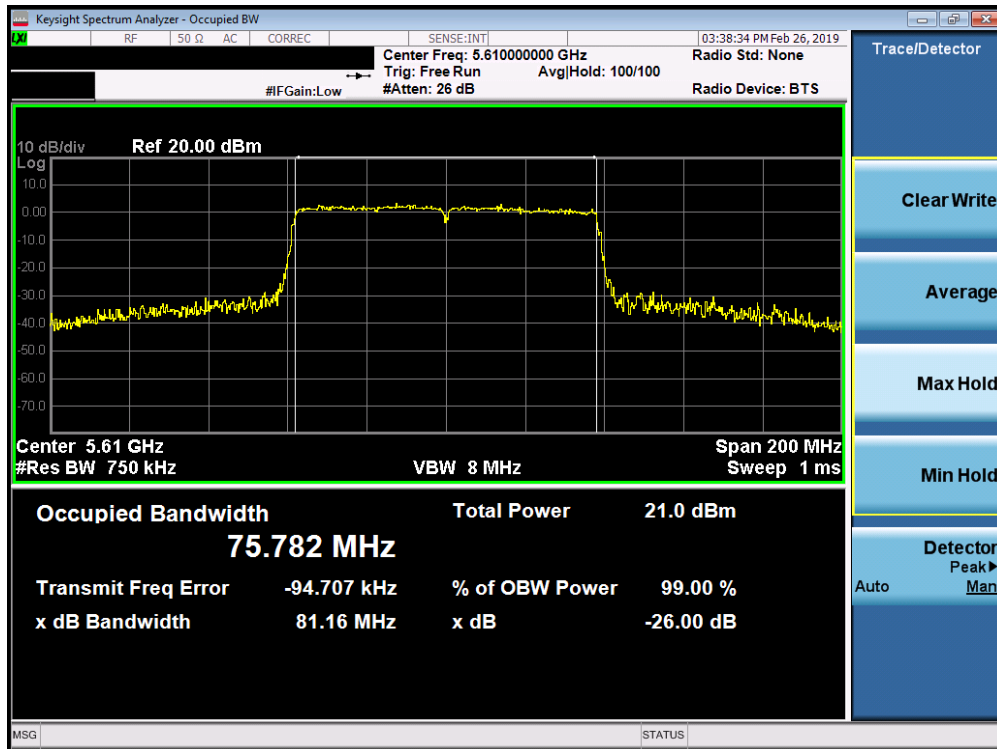


Plot 7-98. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

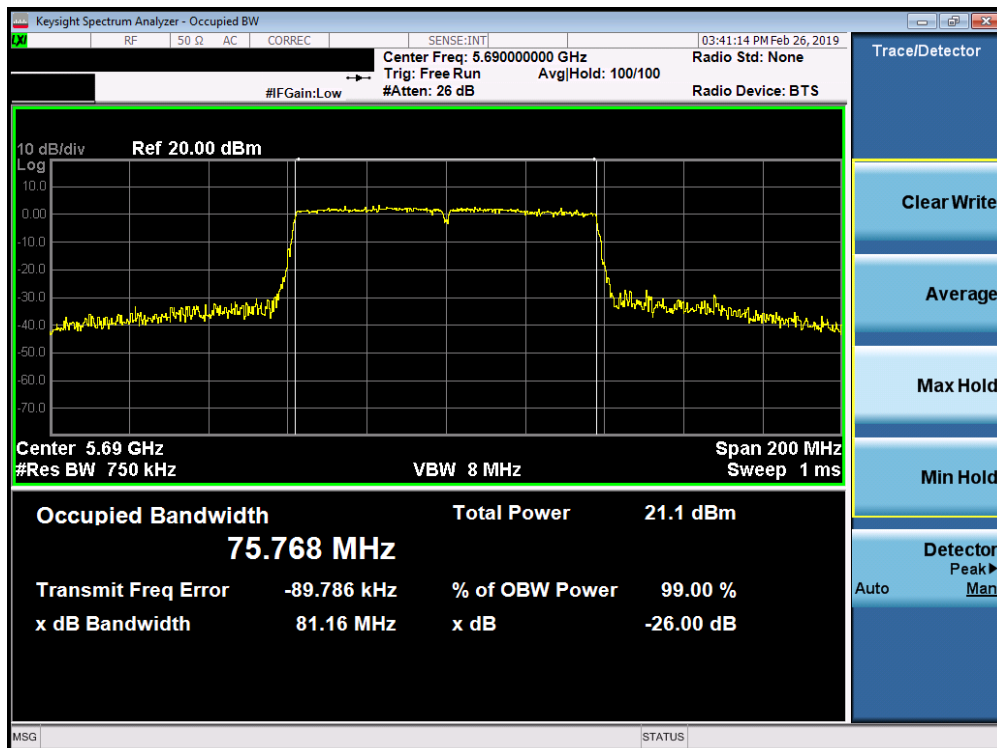


Plot 7-99. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 67 of 248

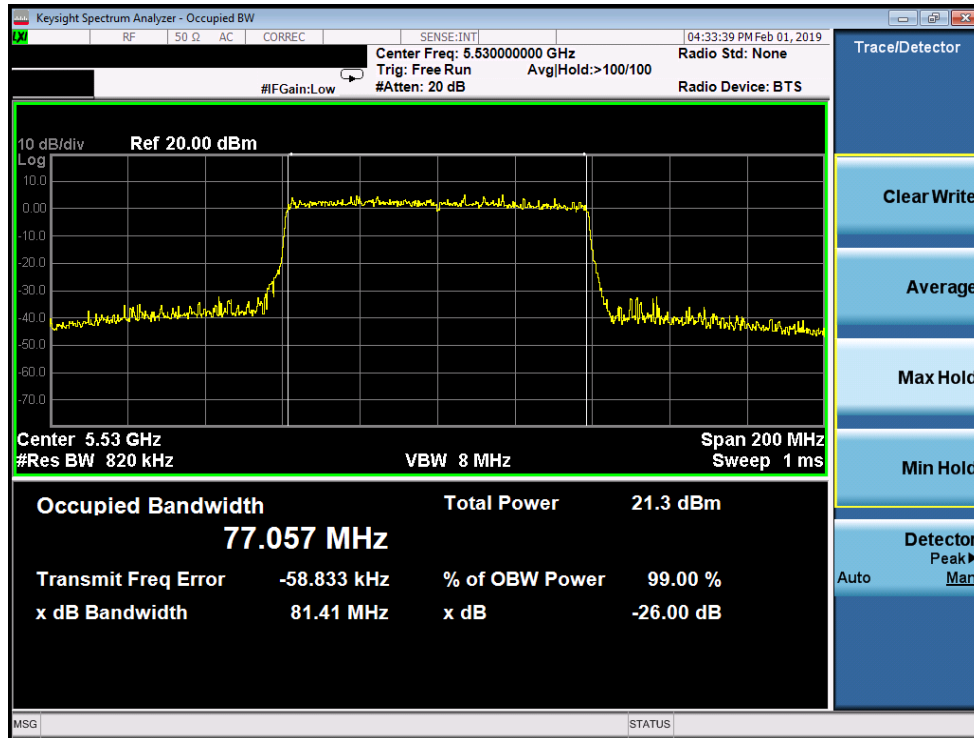


Plot 7-100. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 106)

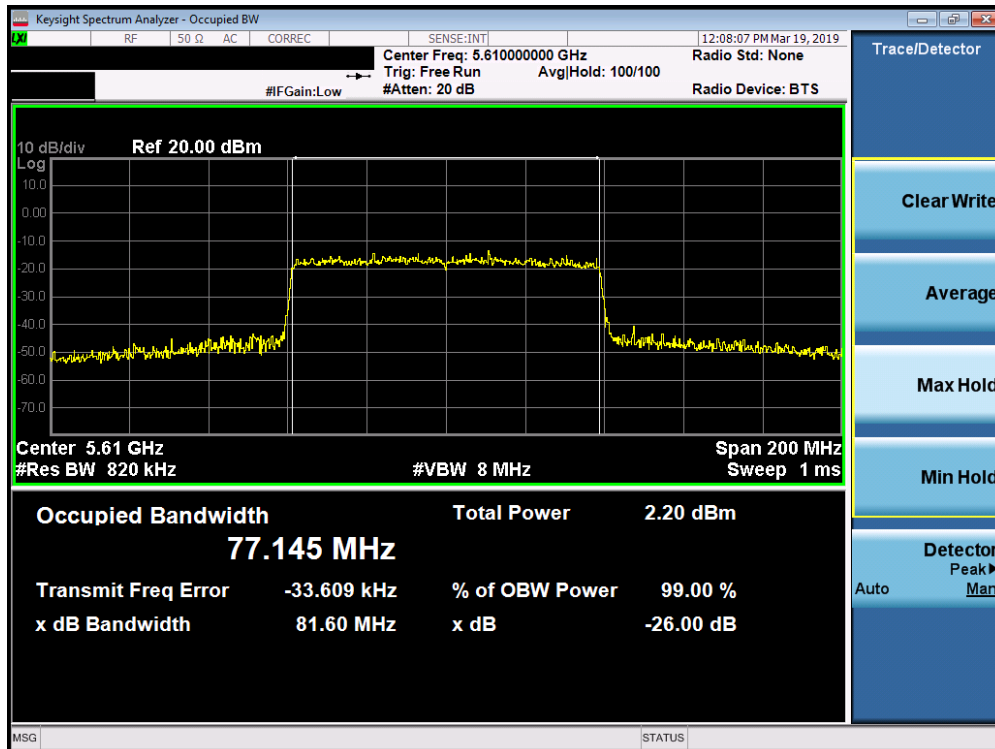

Plot 7-101. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 68 of 248

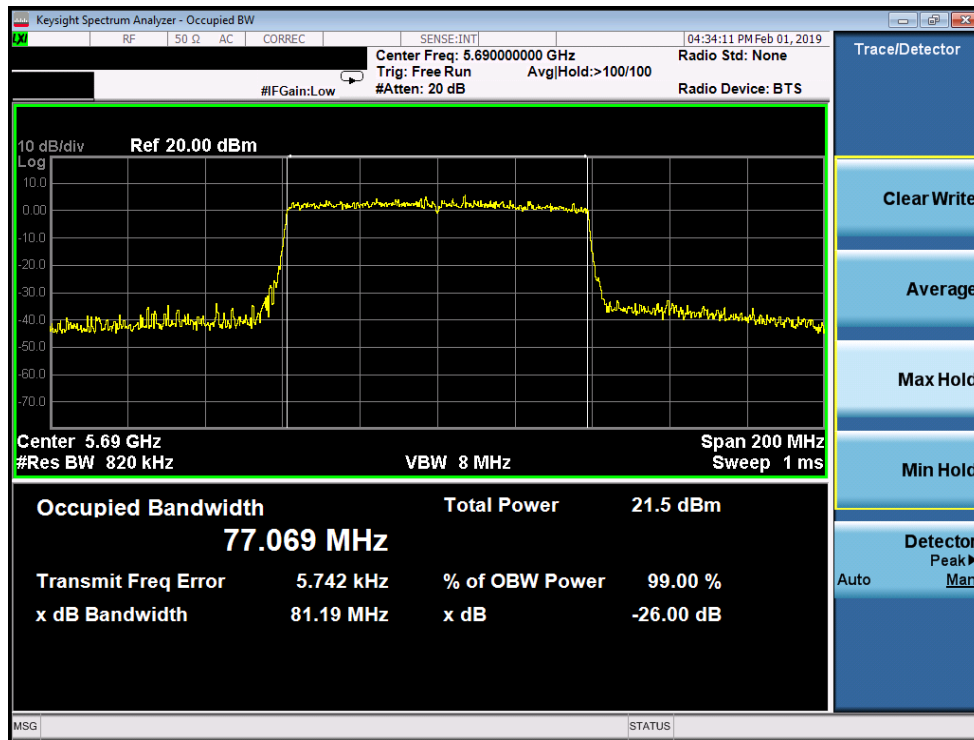

Plot 7-102. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 69 of 248

7.3 6dB Bandwidth Measurement – 802.11a/n/ac/ax §15.407 (e); RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 70 of 248

SISO Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.40
	5785	157	a	6	16.41
	5825	165	a	6	16.39
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.58
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.65
	5745	149	ax (20MHz)	8.6 (MCS0)	19.14
	5785	157	ax (20MHz)	8.6 (MCS0)	18.90
	5825	165	ax (20MHz)	8.6 (MCS0)	18.99
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.34
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.18
	5755	151	ax (40MHz)	17.2 (MCS0)	37.79
	5795	159	ax (40MHz)	17.2 (MCS0)	37.66
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.67
	5775	155	ax (80MHz)	36 (MCS0)	77.23

Table 7-4. Conducted Bandwidth Measurements SISO ANT1

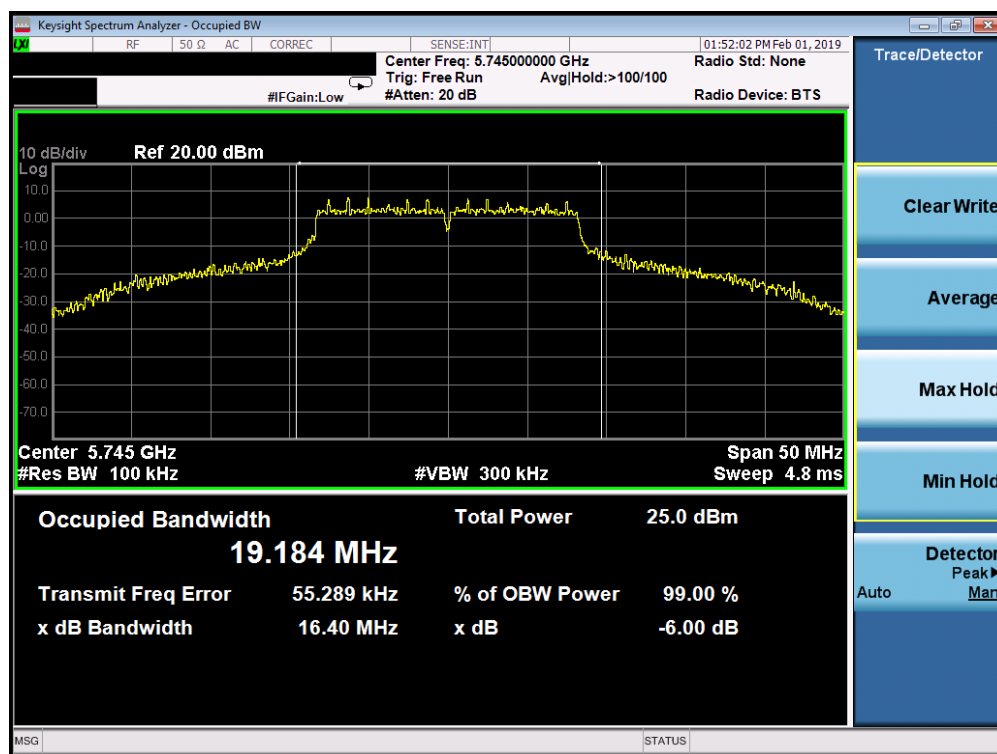


Plot 7-103. 6dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 71 of 248

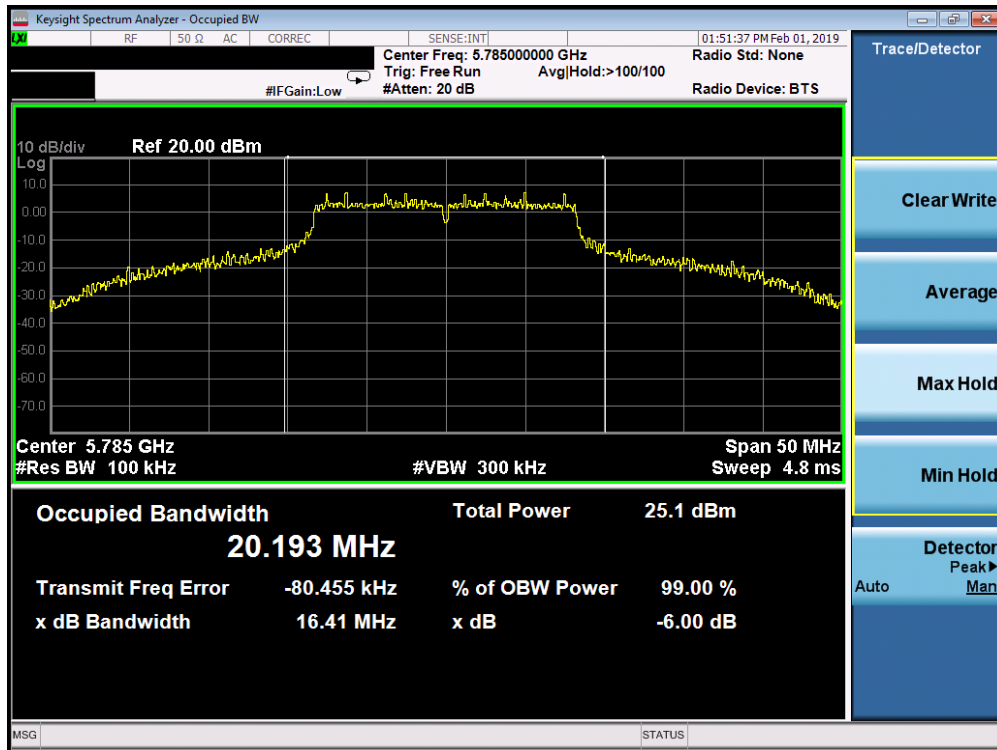


Plot 7-104. 6dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 157)

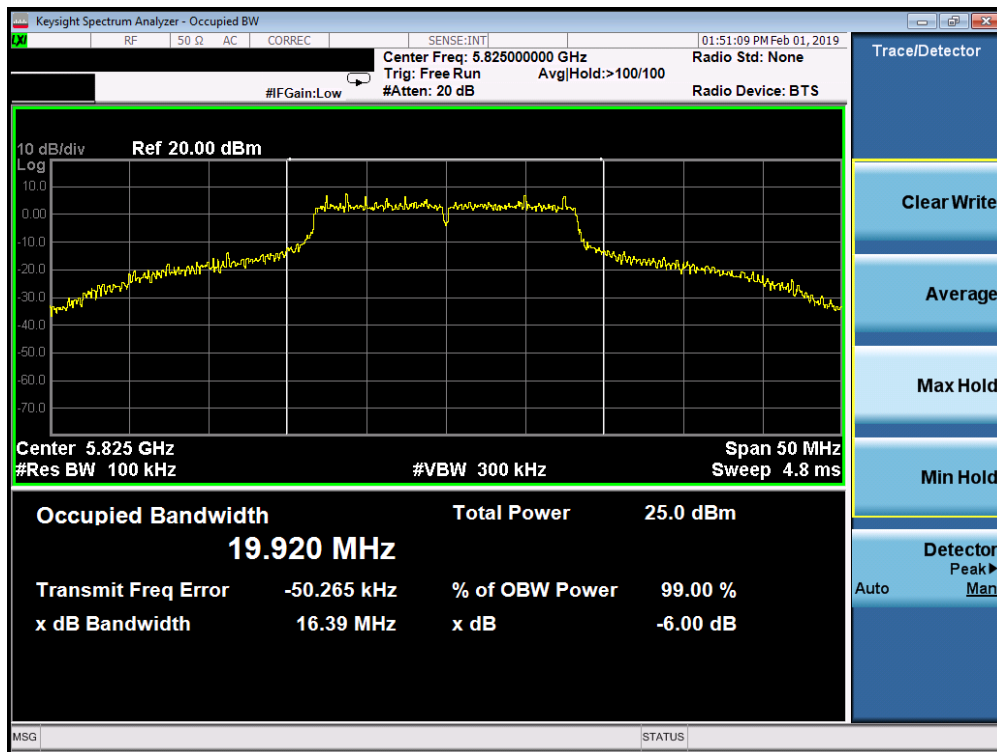


Plot 7-105. 6dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 72 of 248

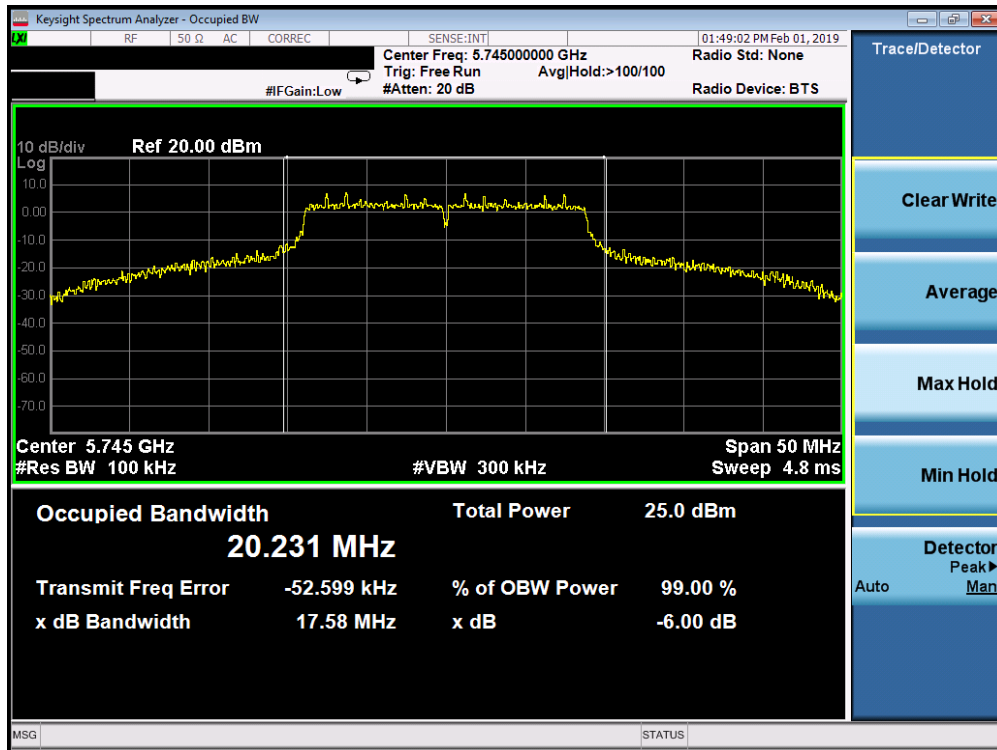


Plot 7-106. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

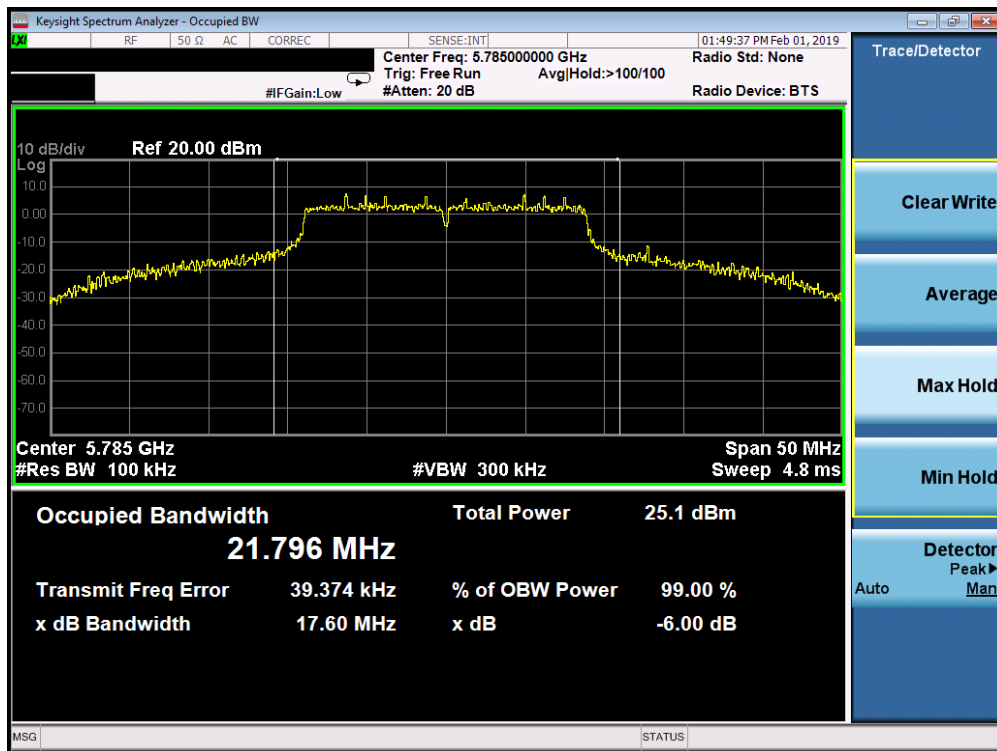


Plot 7-107. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 73 of 248

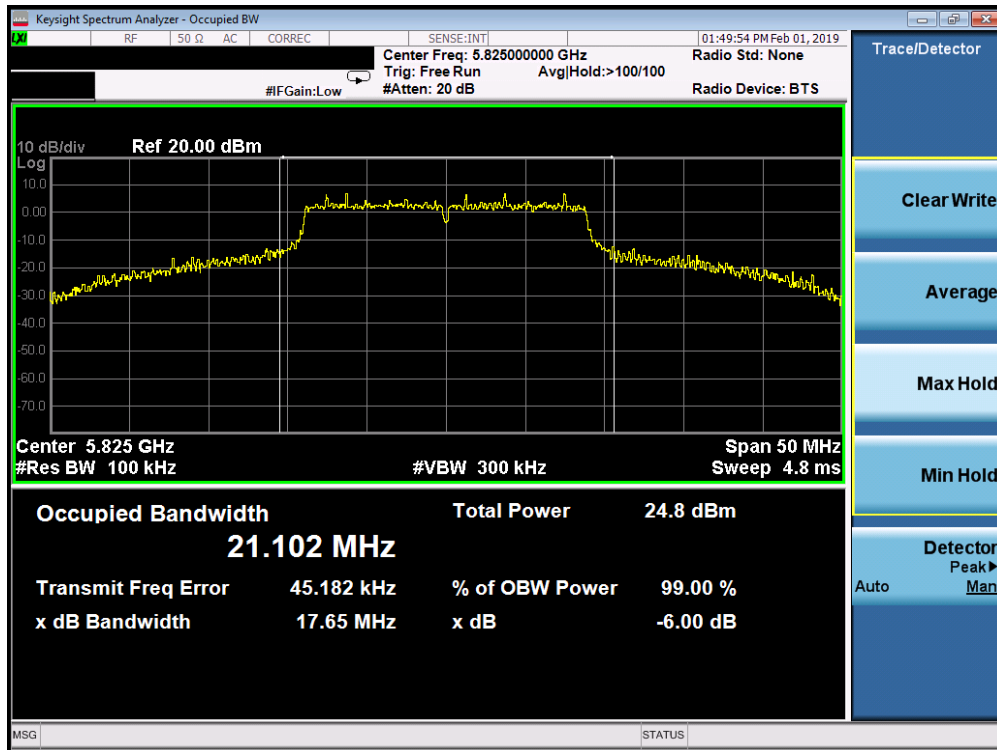


Plot 7-108. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

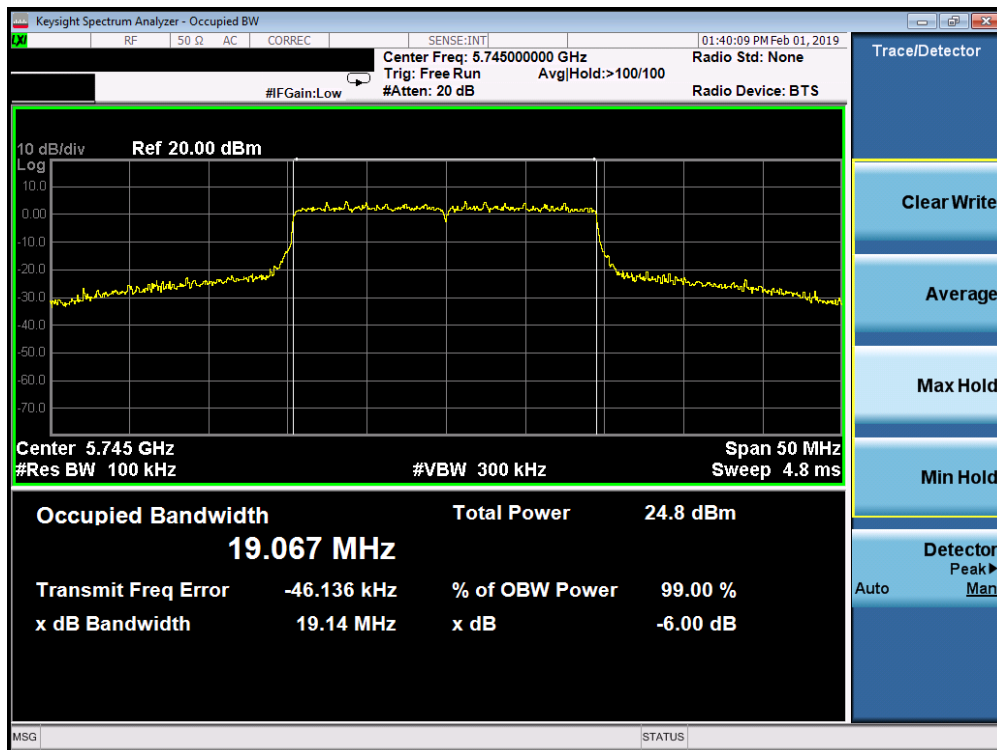


Plot 7-109. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 74 of 248

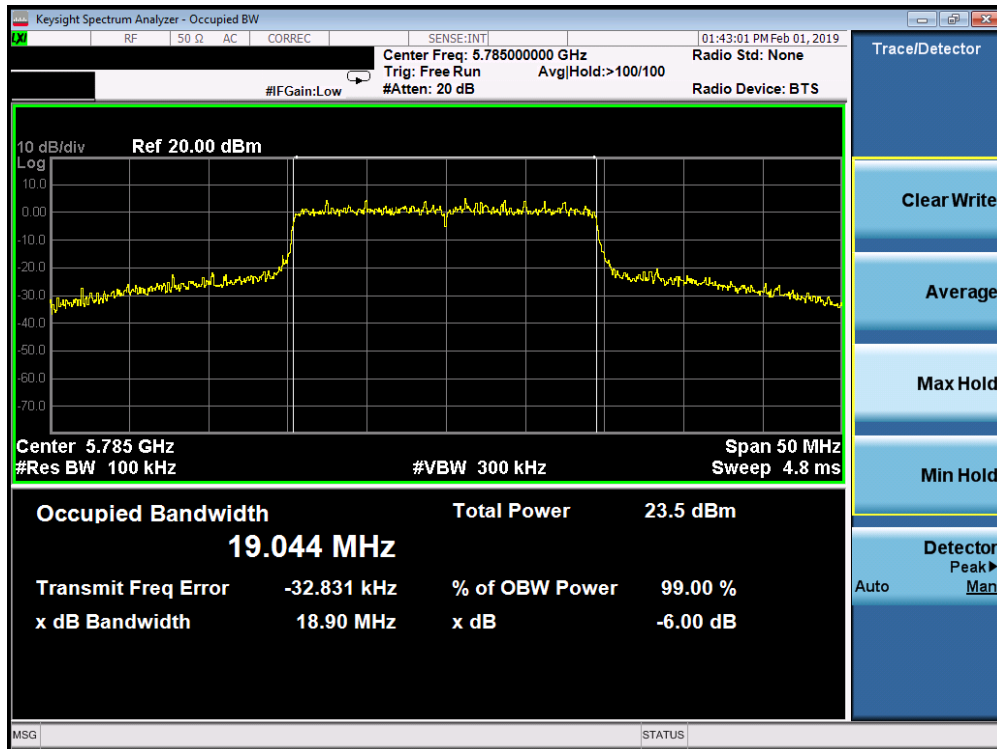


Plot 7-110. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

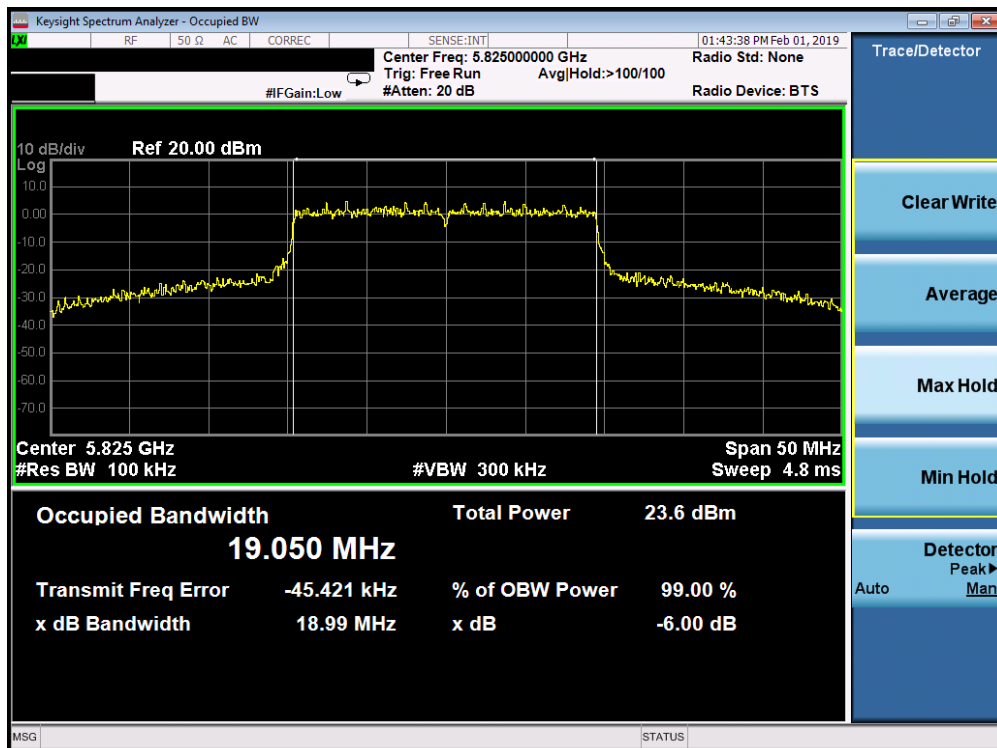


Plot 7-111. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

FCC ID: A3LSMF900F				Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 75 of 248	

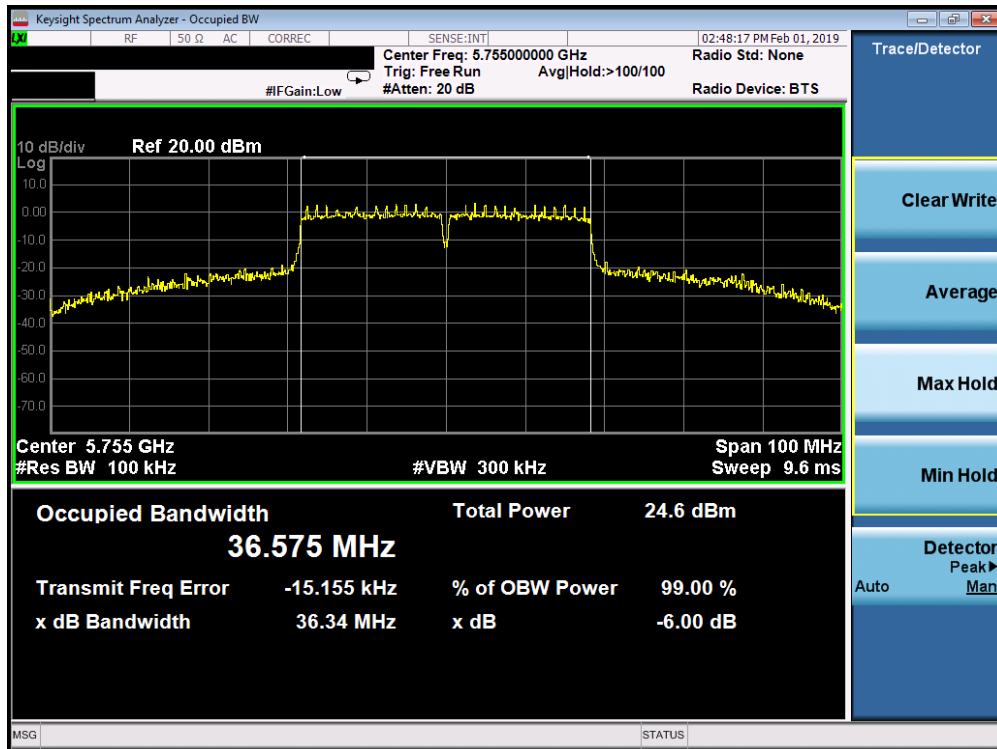


Plot 7-112. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

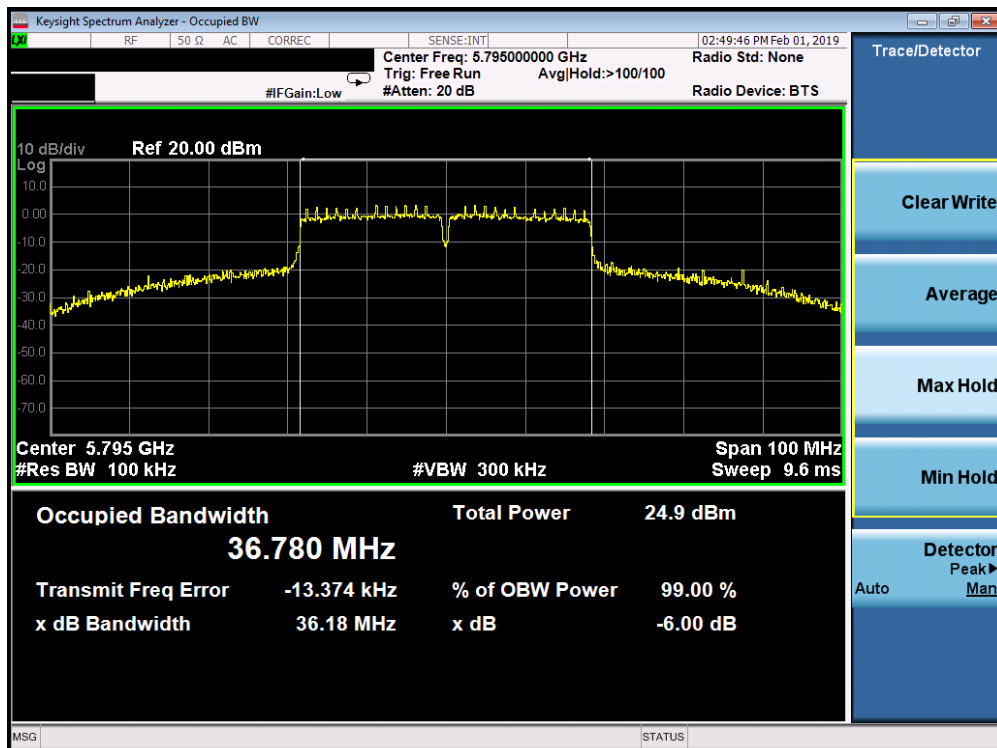


Plot 7-113. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 76 of 248

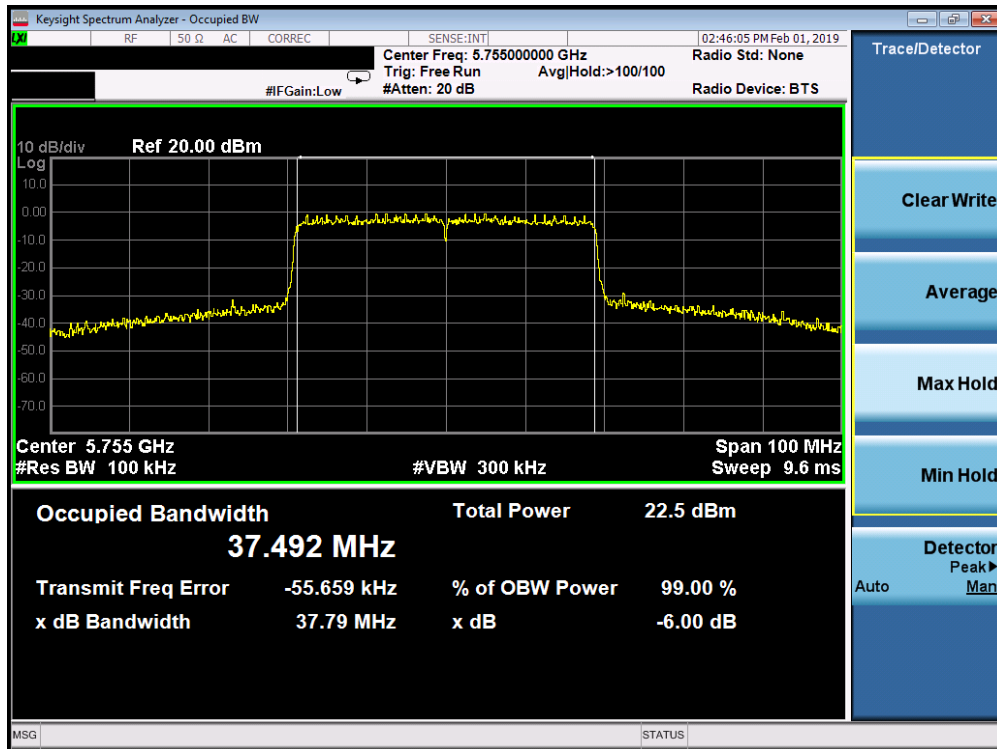


Plot 7-114. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

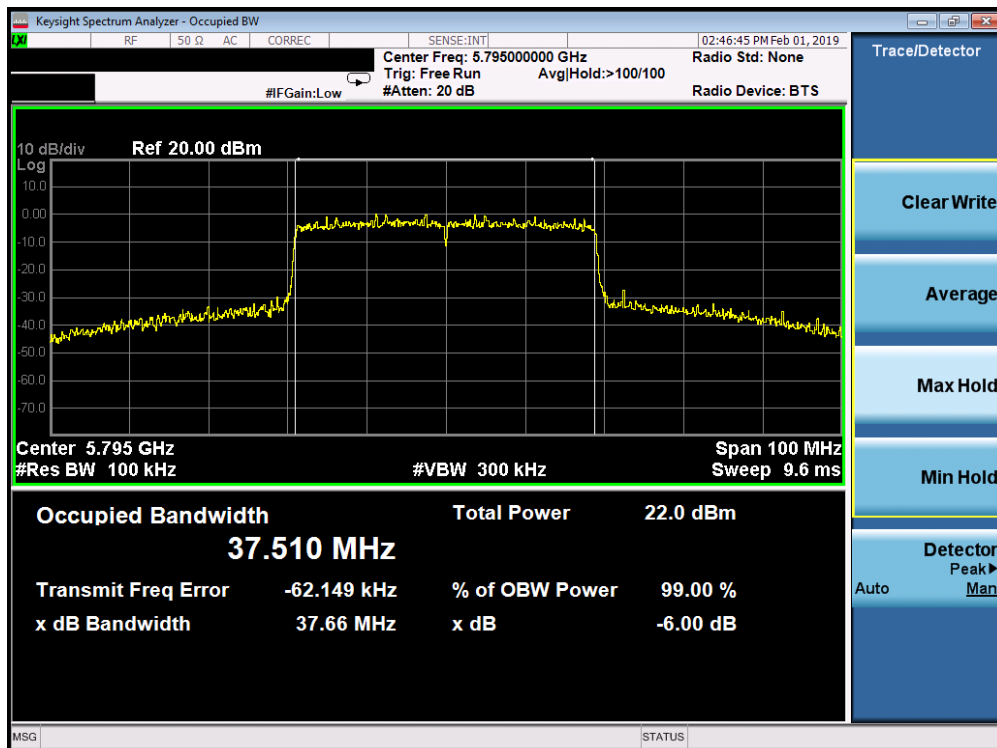


Plot 7-115. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 77 of 248

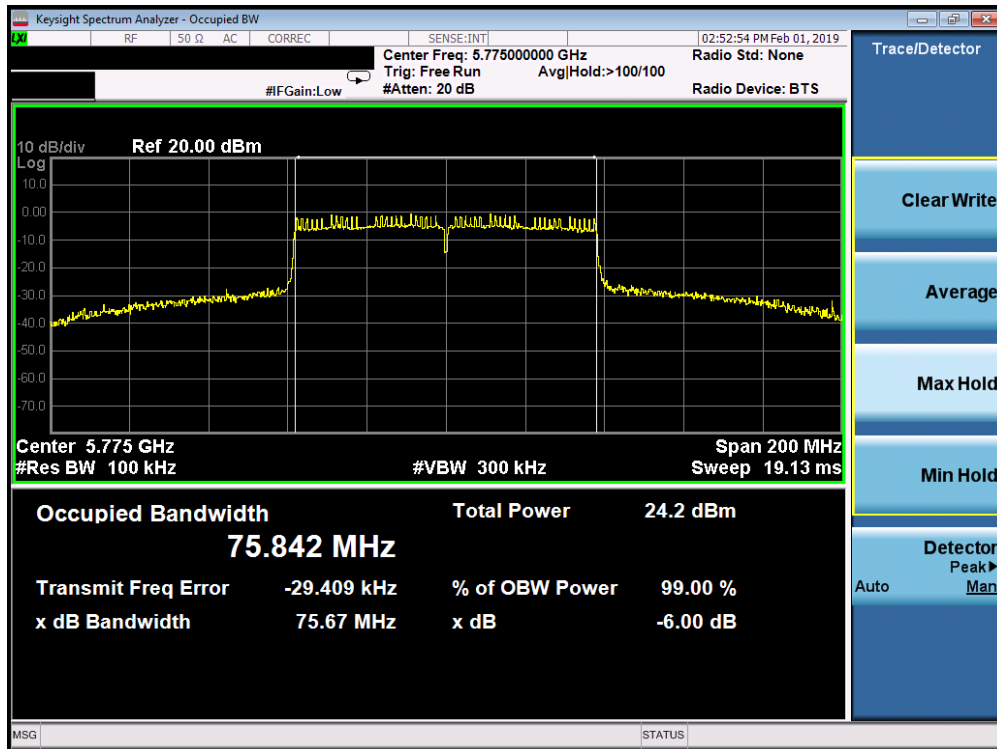

Plot 7-116. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

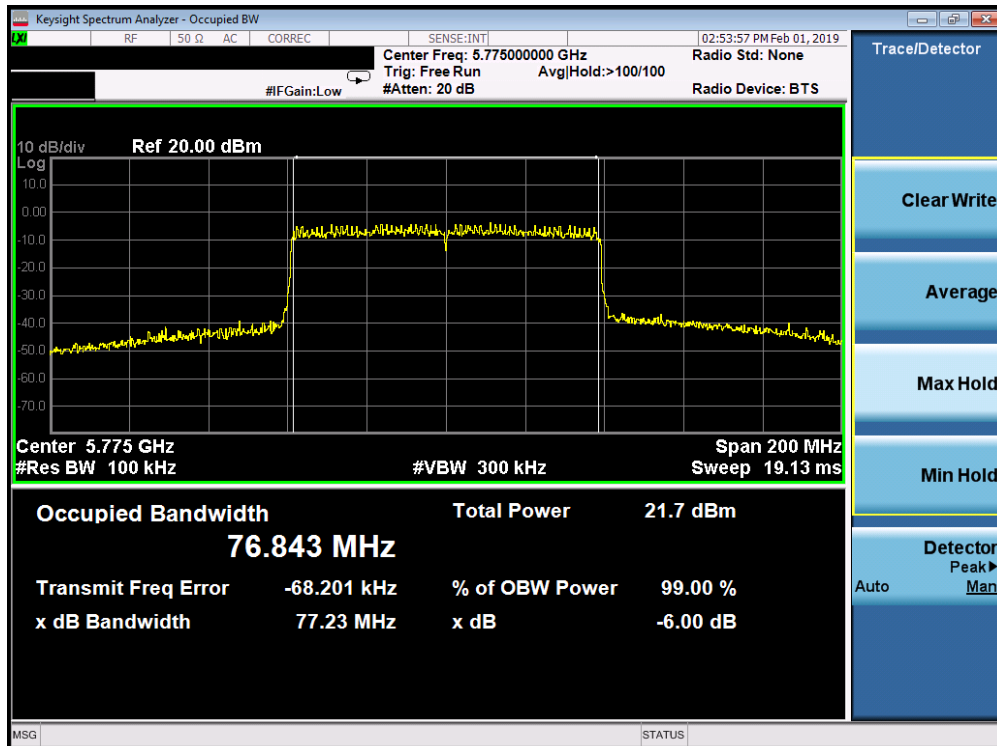


Plot 7-117. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 78 of 248	

SISO Antenna-2 6dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.41
	5785	157	a	6	16.38
	5825	165	a	6	16.39
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.64
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.61
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.68
	5745	149	ax (20MHz)	8.6 (MCS0)	18.89
	5785	157	ax (20MHz)	8.6 (MCS0)	19.05
	5825	165	ax (20MHz)	8.6 (MCS0)	19.08
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.38
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.02
	5755	151	ax (40MHz)	17.2 (MCS0)	37.81
	5795	159	ax (40MHz)	17.2 (MCS0)	37.53
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	76.06
	5775	155	ax (80MHz)	36 (MCS0)	77.81

Table 7-5. Conducted Bandwidth Measurements SISO ANT2

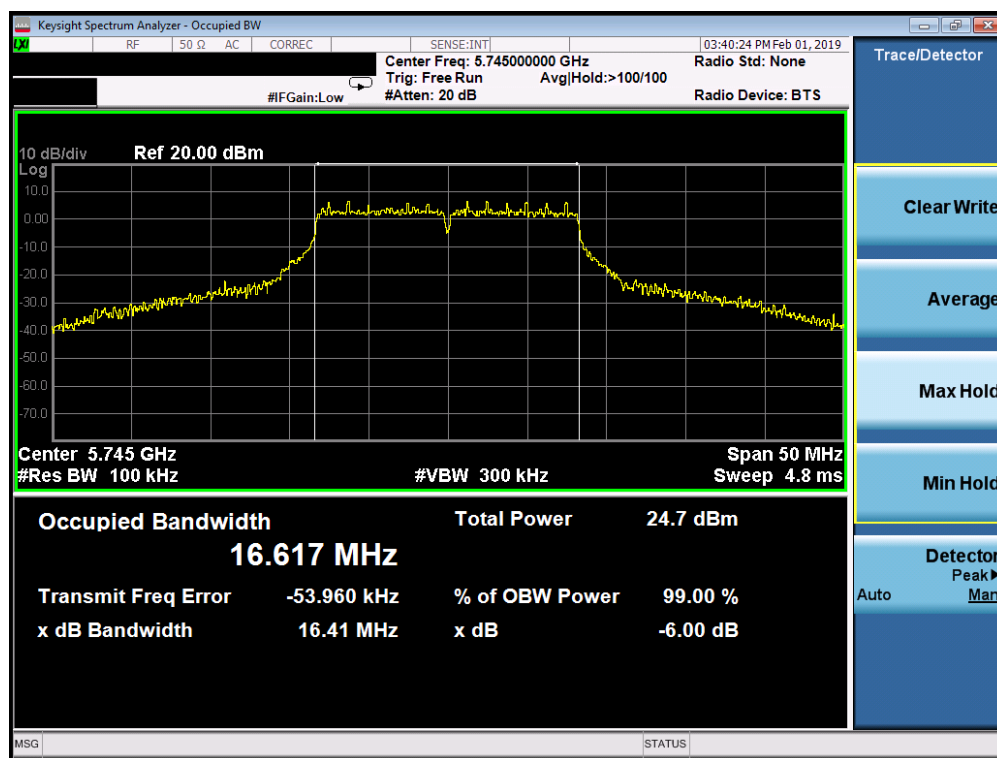


Plot 7-118. 6dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 79 of 248

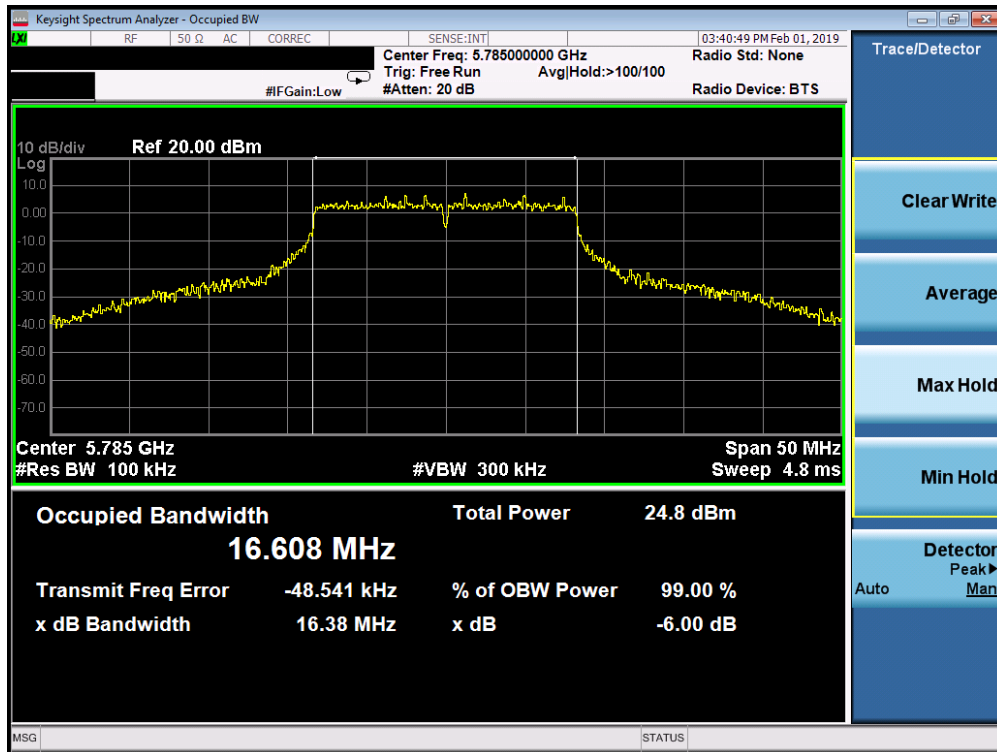


Plot 7-119. 6dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 157)

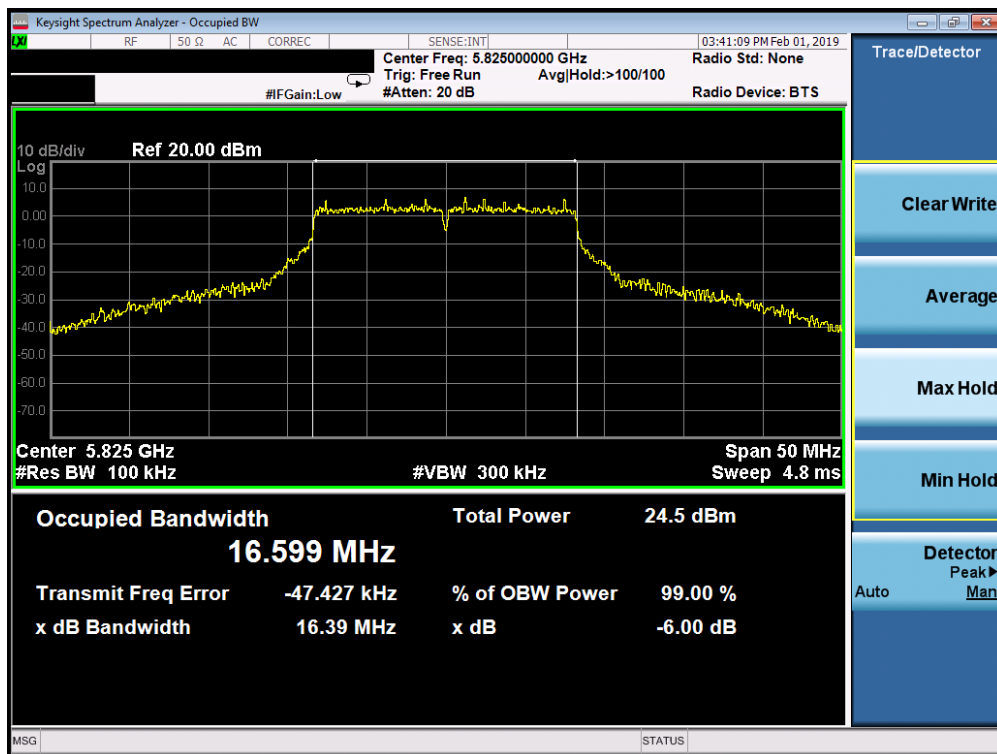


Plot 7-120. 6dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 80 of 248

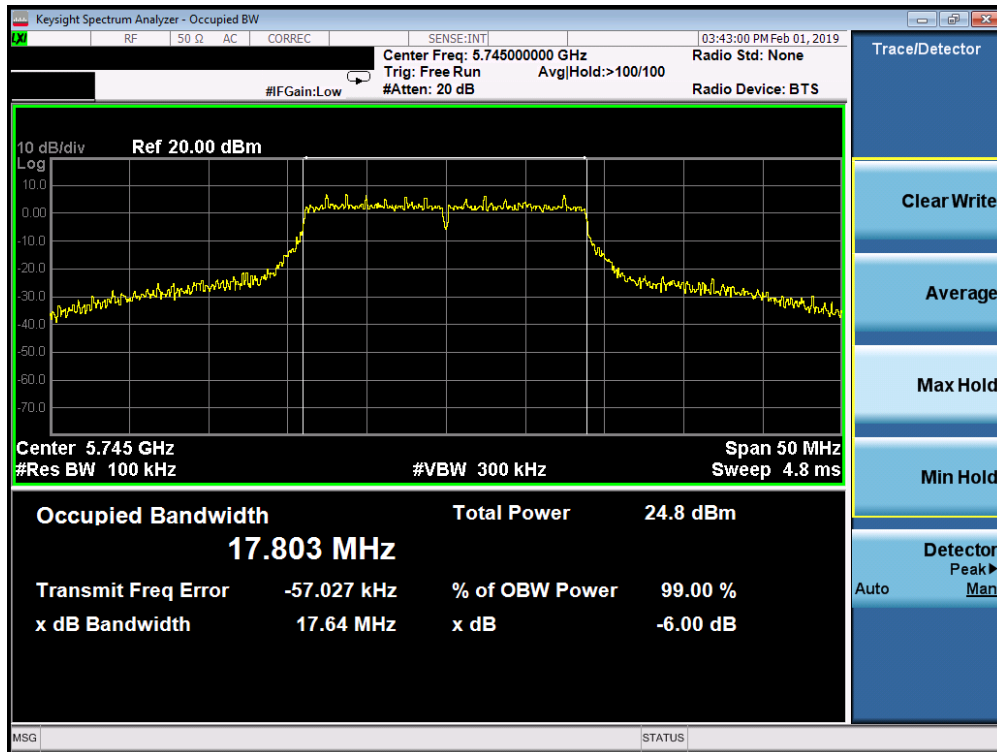


Plot 7-121. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

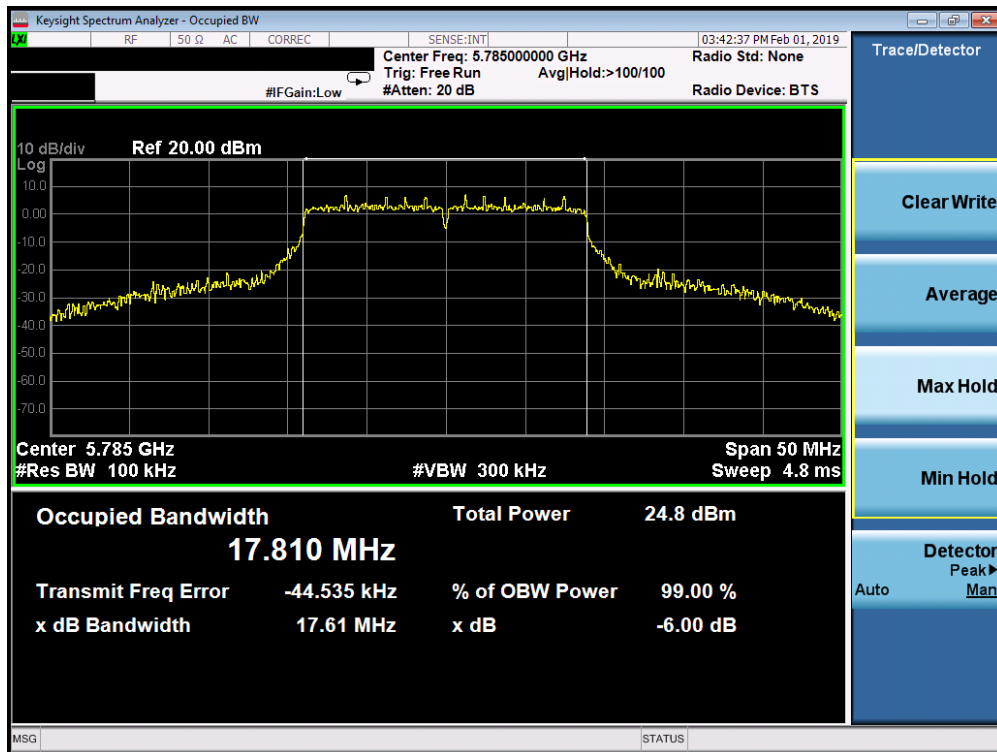


Plot 7-122. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 81 of 248

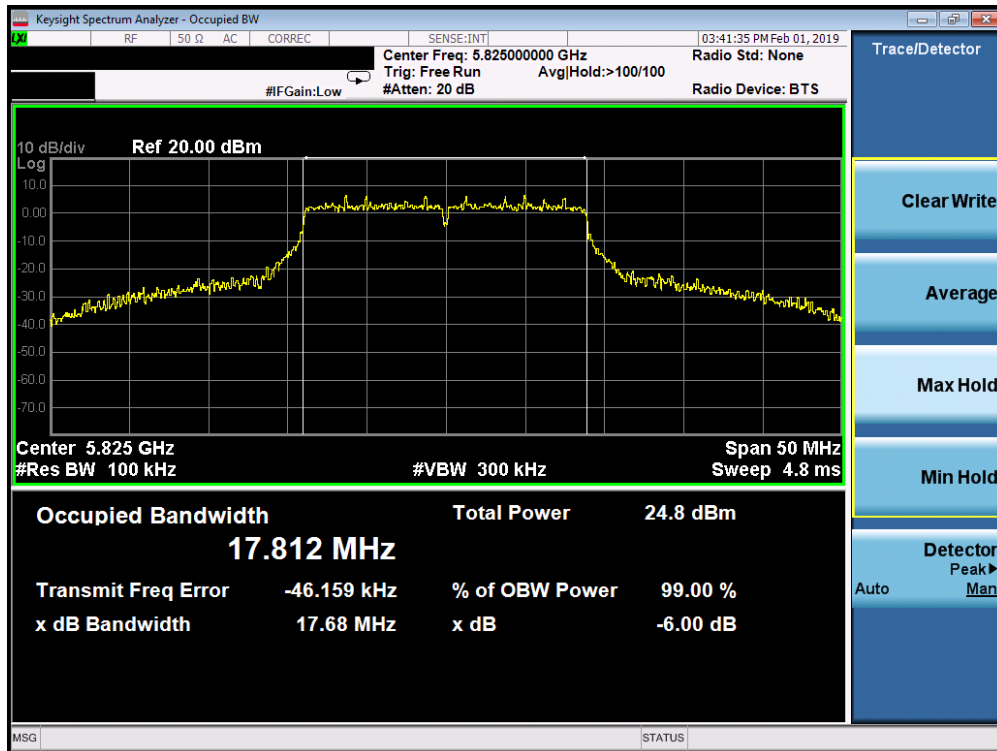


Plot 7-123. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

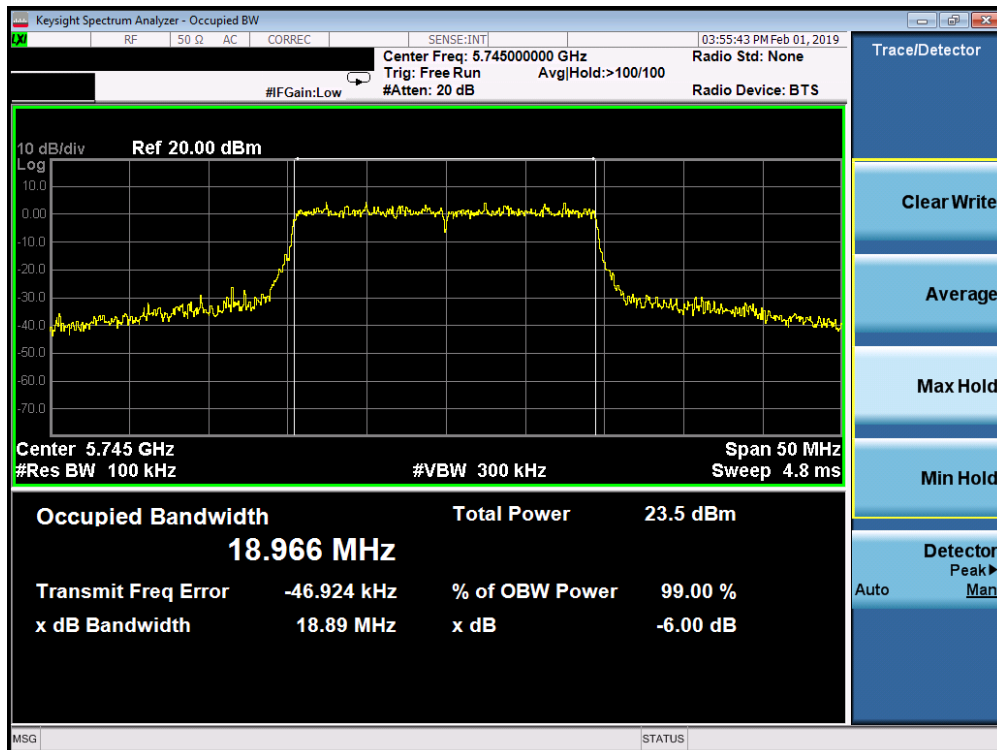


Plot 7-124. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 82 of 248

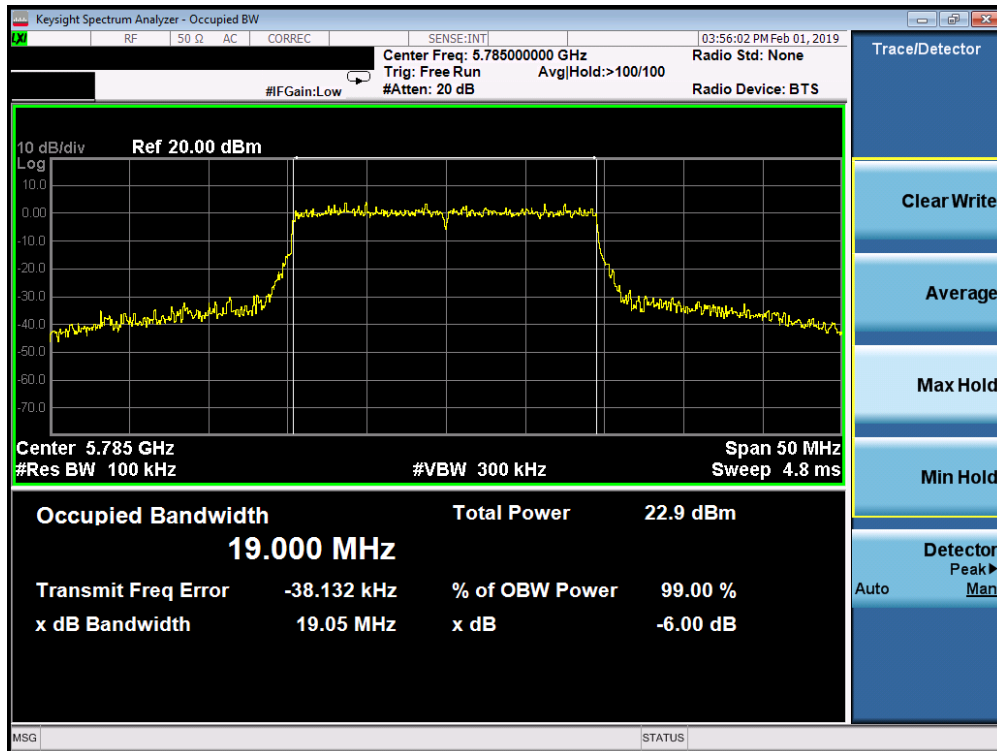


Plot 7-125. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

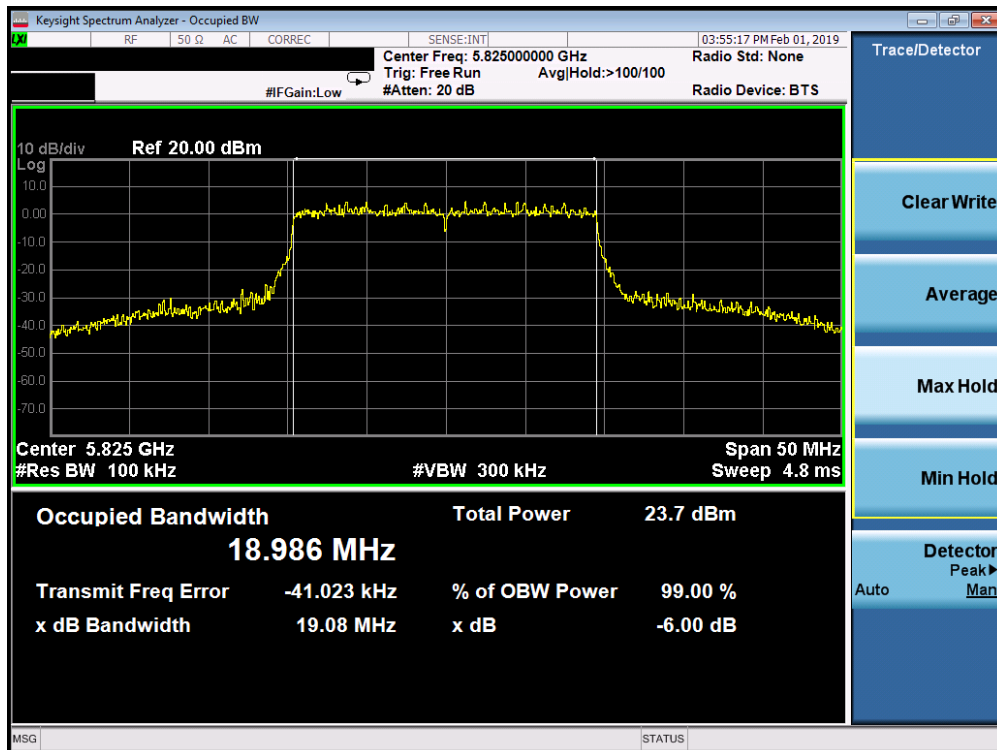


Plot 7-126. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 83 of 248

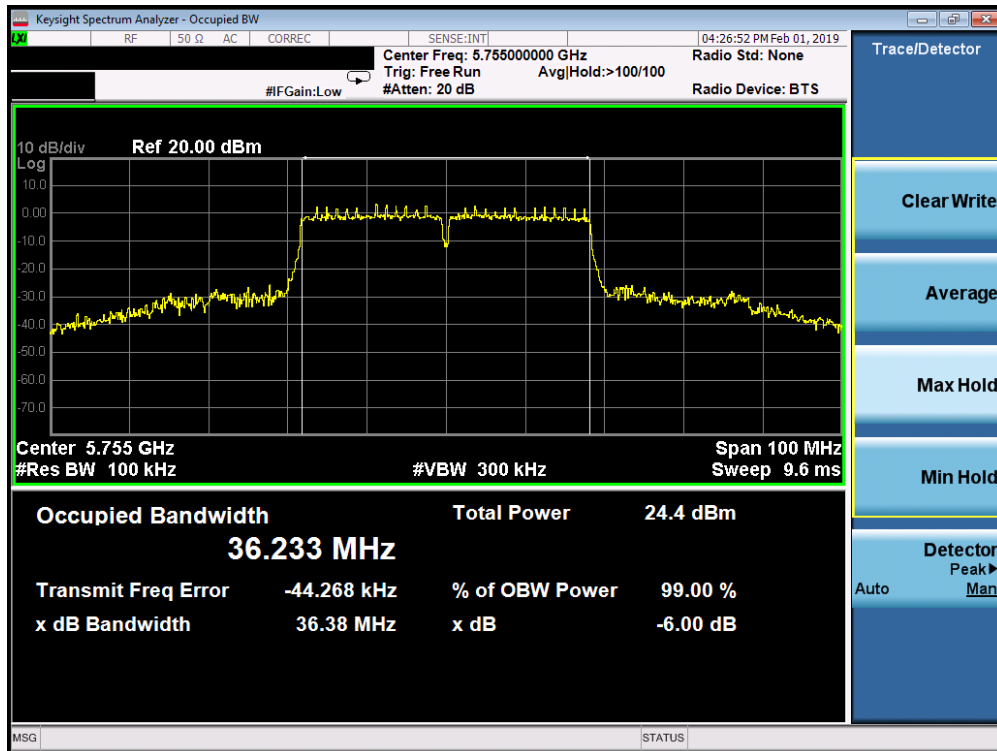


Plot 7-127. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

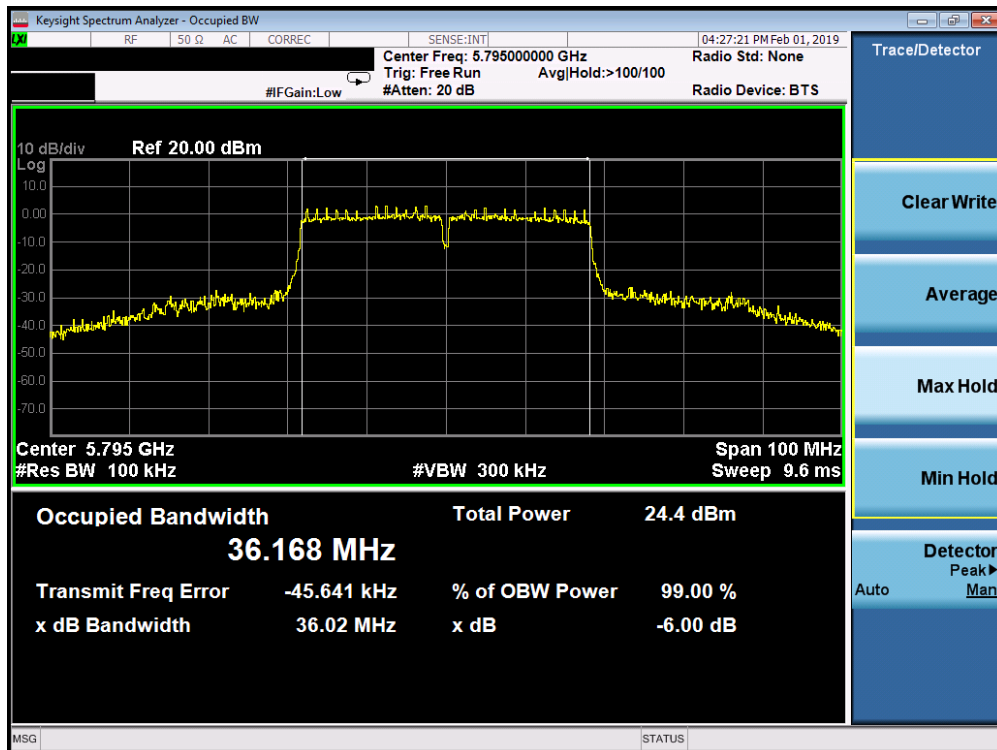


Plot 7-128. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 84 of 248

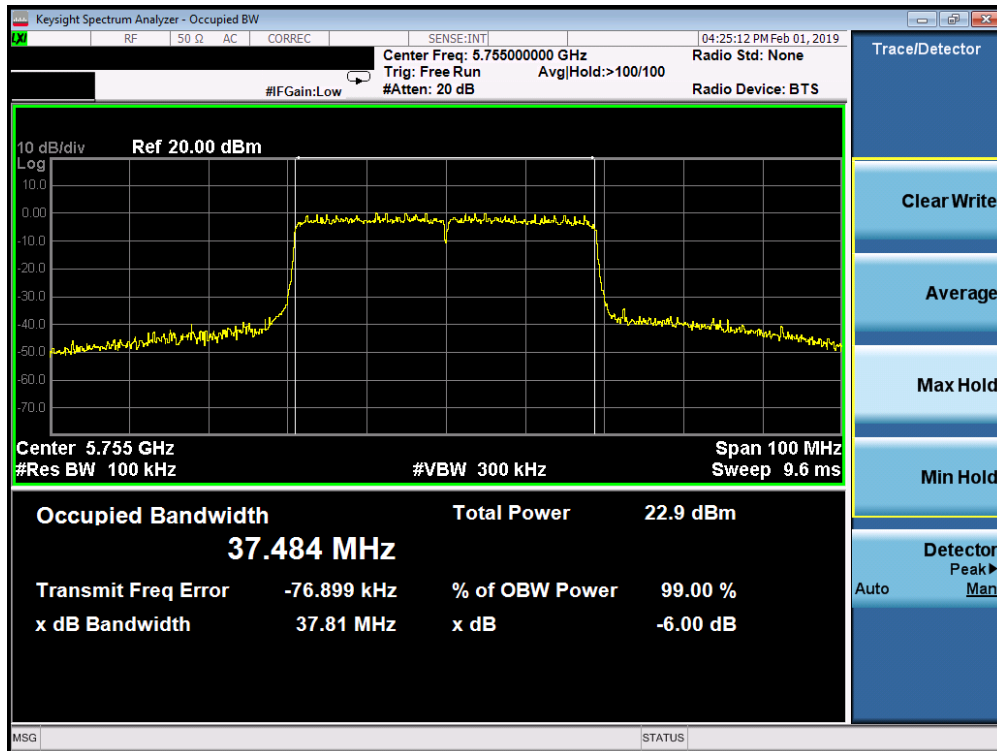


Plot 7-129. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

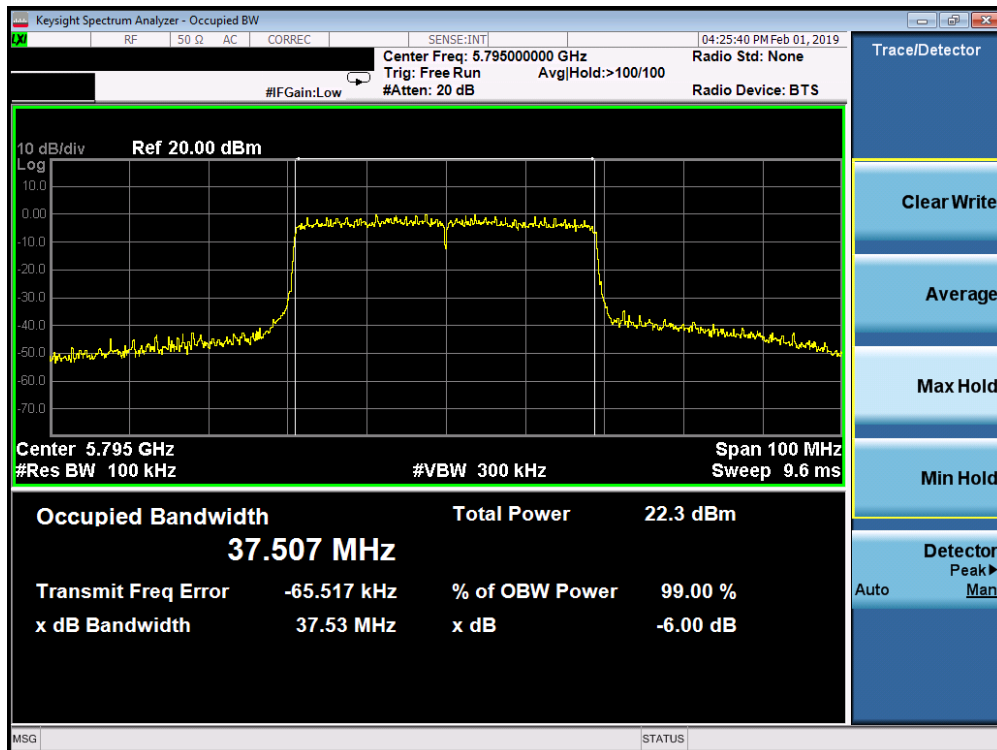


Plot 7-130. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 85 of 248

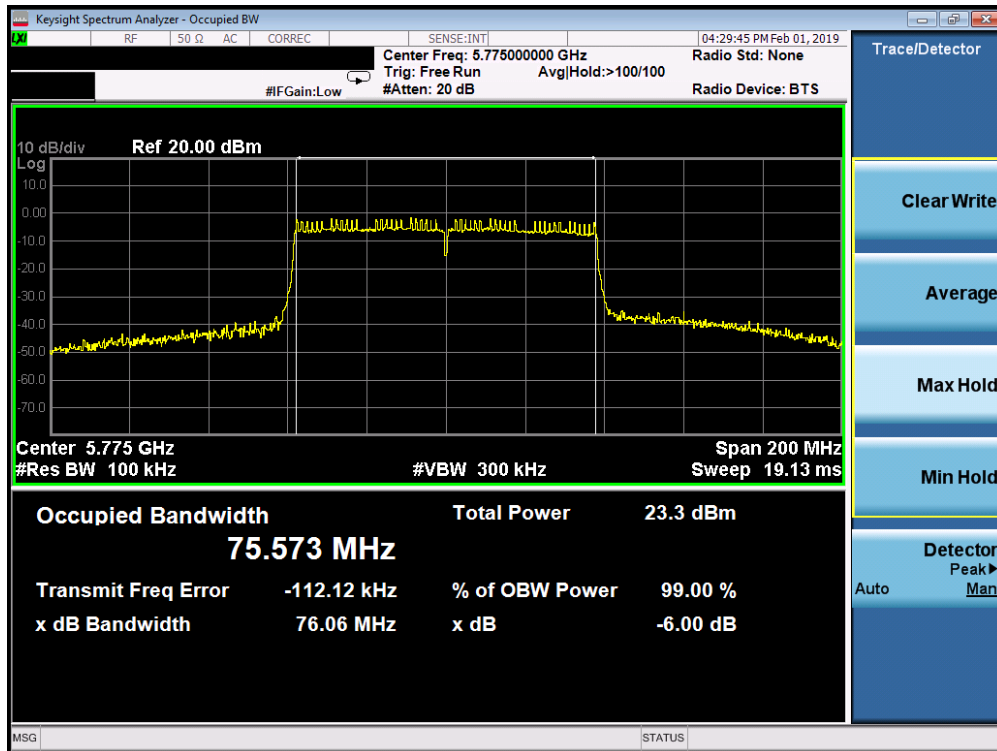

Plot 7-131. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

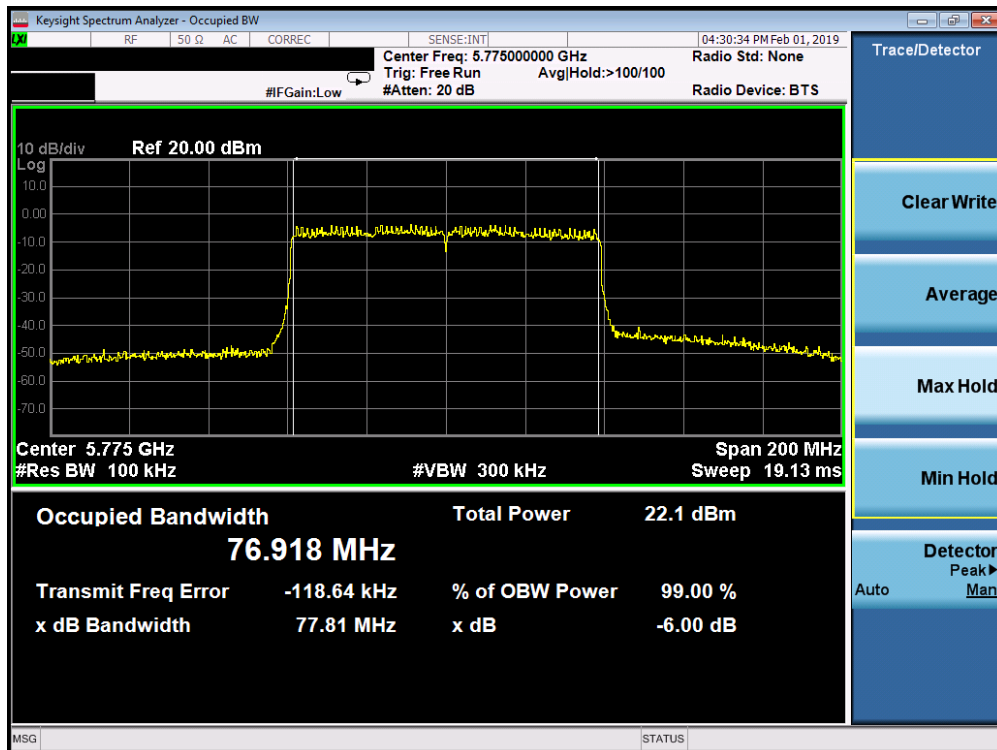

Plot 7-132. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 86 of 248

7.4 UNII Output Power Measurement – 802.11a/n/ac/ax

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.29) = 24.28\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.56) = 24.34\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 87 of 248

SISO Antenna-1 Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ac	802.11ax						
	5180	36	AVG	17.98	17.94	17.96	15.68	23.98	-6.00	-5.50	12.48	23.01	-10.53
	5200	40	AVG	17.99	17.98	17.69	15.76	23.98	-5.99	-5.50	12.49	23.01	-10.52
	5220	44	AVG	17.58	17.99	17.64	15.72	23.98	-5.99	-5.50	12.49	23.01	-10.52
	5240	48	AVG	17.68	17.68	17.67	15.75	23.98	-6.30	-5.50	12.18	23.01	-10.83
	5260	52	AVG	17.75	17.76	17.71	15.61	23.98	-6.22	-5.50	12.26	30.00	-17.74
	5280	56	AVG	17.80	17.90	17.79	15.73	23.98	-6.08	-5.50	12.40	30.00	-17.60
	5300	60	AVG	17.87	17.89	17.91	15.70	23.98	-6.07	-5.50	12.41	30.00	-17.59
	5320	64	AVG	17.91	17.77	17.76	15.72	23.98	-6.07	-5.50	12.41	30.00	-17.59
	5500	100	AVG	17.94	17.94	17.98	15.64	23.98	-6.00	-5.50	12.48	30.00	-17.52
	5600	120	AVG	17.74	17.66	17.75	15.82	23.98	-6.23	-6.75	11.00	-	-
	5620	124	AVG	17.68	17.72	17.81	15.79	23.98	-6.17	-6.75	11.06	-	-
	5720	144	AVG	17.83	17.82	17.82	15.72	23.98	-6.15	-6.75	11.08	30.00	-18.92
	5745	149	AVG	17.94	17.89	17.96	15.97	30.00	-12.04	-6.75	11.21	-	-
	5785	157	AVG	17.97	17.91	17.99	15.99	30.00	-12.01	-6.75	11.24	-	-
	5825	165	AVG	17.95	17.93	17.56	15.79	30.00	-12.05	-6.75	11.20	-	-

Table 7-6. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ac	802.11ax						
	5190	38	AVG	14.85	14.67	13.86	23.98	-9.13	-5.50	9.35	23.01	-13.66
	5230	46	AVG	16.86	16.85	13.98	23.98	-7.12	-5.50	11.36	23.01	-11.65
	5270	54	AVG	16.97	16.99	13.99	23.98	-6.99	-5.50	11.49	30.00	-18.51
	5310	62	AVG	15.07	14.97	13.89	23.98	-8.91	-5.50	9.57	30.00	-20.43
	5510	102	AVG	15.07	15.02	13.71	23.98	-8.91	-5.50	9.57	30.00	-20.43
	5590	118	AVG	16.83	16.92	13.75	23.98	-7.06	-6.75	10.17	-	-
	5630	126	AVG	16.94	16.97	13.97	23.98	-7.01	-6.75	10.22	-	-
	5710	142	AVG	16.99	16.99	13.96	23.98	-6.99	-6.75	10.24	30.00	-19.76
	5755	151	AVG	16.98	16.96	13.74	30.00	-13.02	-6.75	10.23	-	-
	5795	159	AVG	16.86	16.82	13.89	30.00	-13.14	-6.75	10.11	-	-

Table 7-7. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode	IEEE Transmission Mode	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	12.97	12.85	23.98	-11.01	-5.50	7.47	23.01	-15.54
	5290	58	AVG	12.95	12.88	23.98	-11.03	-5.50	7.45	30.00	-22.55
	5530	106	AVG	14.23	12.98	23.98	-9.75	-5.50	8.73	30.00	-21.27
	5610	122	AVG	15.68	12.81	23.98	-8.30	-6.75	8.93	-	-
	5690	138	AVG	15.76	12.83	23.98	-8.22	-6.75	9.01	30.00	-20.99
	5775	155	AVG	15.67	12.9	30.00	-14.33	-6.75	8.92	-	-

Table 7-8. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 88 of 248

SISO Antenna-2 Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ac	802.11ax						
	5180	36	AVG	17.79	17.76	17.73	15.62	23.98	-6.19	-6.05	11.74	23.01	-11.27
	5200	40	AVG	17.85	17.88	17.94	15.67	23.98	-6.04	-6.05	11.89	23.01	-11.12
	5220	44	AVG	17.92	17.95	17.97	15.77	23.98	-6.01	-6.05	11.92	23.01	-11.09
	5240	48	AVG	17.98	17.98	17.99	15.96	23.98	-5.99	-6.05	11.94	23.01	-11.07
	5260	52	AVG	17.87	17.91	17.89	15.74	23.98	-6.07	-6.05	11.86	30.00	-18.14
	5280	56	AVG	17.99	17.99	17.98	15.83	23.98	-5.99	-6.05	11.94	30.00	-18.06
	5300	60	AVG	17.68	17.69	17.66	15.98	23.98	-6.29	-6.05	11.64	30.00	-18.36
	5320	64	AVG	17.65	17.62	17.97	15.94	23.98	-6.01	-6.05	11.92	30.00	-18.08
	5500	100	AVG	17.84	17.86	17.82	15.71	23.98	-6.12	-6.05	11.81	30.00	-18.19
	5600	120	AVG	17.68	17.74	17.73	15.89	23.98	-6.24	-7.34	10.40	-	-
	5620	124	AVG	17.76	17.71	17.69	15.92	23.98	-6.22	-7.34	10.42	-	-
	5720	144	AVG	17.98	17.96	17.98	15.84	23.98	-6.00	-7.34	10.64	30.00	-19.36
	5745	149	AVG	17.73	17.66	17.81	15.97	30.00	-12.19	-7.34	10.47	-	-
	5785	157	AVG	17.86	17.84	17.78	15.64	30.00	-12.14	-7.34	10.52	-	-
	5825	165	AVG	17.76	17.77	17.76	15.98	30.00	-12.23	-7.34	10.43	-	-

Table 7-9. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ac	802.11ax						
	5190	38	AVG	14.92	14.78	13.95	23.98	-9.06	-6.05	8.87	23.01	-14.14
	5230	46	AVG	16.97	16.98	13.76	23.98	-7.00	-6.05	10.93	23.01	-12.08
	5270	54	AVG	16.90	16.91	13.60	23.98	-7.07	-6.05	10.86	30.00	-19.14
	5310	62	AVG	15.12	15.14	13.77	23.98	-8.84	-6.05	9.09	30.00	-20.91
	5510	102	AVG	15.19	15.12	13.98	23.98	-8.79	-6.05	9.14	30.00	-20.86
	5590	118	AVG	16.77	16.92	13.63	23.98	-7.06	-7.34	9.58	-	-
	5630	126	AVG	16.93	16.94	13.67	23.98	-7.04	-7.34	9.60	-	-
	5710	142	AVG	16.79	16.97	13.66	23.98	-7.01	-7.34	9.63	30.00	-20.37
	5755	151	AVG	16.62	16.91	13.96	30.00	-13.09	-7.34	9.57	-	-
	5795	159	AVG	16.98	16.78	13.89	30.00	-13.02	-7.34	9.64	-	-

Table 7-10. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	12.97	12.96	23.98	-11.01	-6.05	6.92	23.01	-16.09
	5290	58	AVG	12.66	12.93	23.98	-11.05	-6.05	6.88	30.00	-23.12
	5530	106	AVG	14.03	12.98	23.98	-9.95	-6.05	7.98	30.00	-22.02
	5610	122	AVG	15.71	12.99	23.98	-8.27	-7.34	8.37	-	-
	5690	138	AVG	15.98	12.98	23.98	-8.00	-7.34	8.64	30.00	-21.36
	5775	155	AVG	15.99	12.74	30.00	-14.01	-7.34	8.65	-	-

Table 7-11. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset			Page 89 of 248

MIMO Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5180	36	AVG	17.98	17.79	20.90	23.98	-3.08	-2.76	18.14	23.01	-4.87
	5200	40	AVG	17.99	17.85	20.93	23.98	-3.05	-2.76	18.17	23.01	-4.84
	5220	44	AVG	17.58	17.92	20.76	23.98	-3.22	-2.76	18.01	23.01	-5.00
	5240	48	AVG	17.68	17.98	20.84	23.98	-3.14	-2.76	18.09	23.01	-4.92
	5260	52	AVG	17.75	17.87	20.82	23.98	-3.16	-2.76	18.06	30.00	-11.94
	5280	56	AVG	17.80	17.99	20.91	23.98	-3.07	-2.76	18.15	30.00	-11.85
	5300	60	AVG	17.87	17.68	20.79	23.98	-3.19	-2.76	18.03	30.00	-11.97
	5320	64	AVG	17.91	17.65	20.79	23.98	-3.19	-2.76	18.04	30.00	-11.96
	5500	100	AVG	17.94	17.84	20.90	23.98	-3.08	-4.96	15.94	30.00	-14.06
	5600	120	AVG	17.74	17.68	20.72	23.98	-3.26	-4.02	16.70	-	-
	5620	124	AVG	17.68	17.76	20.73	23.98	-3.25	-4.02	16.71	-	-
	5720	144	AVG	17.83	17.98	20.92	23.98	-3.06	-4.02	16.89	30.00	-13.11
	5745	149	AVG	17.94	17.73	20.85	30.00	-9.15	-4.02	16.82	-	-
	5785	157	AVG	17.97	17.86	20.93	30.00	-9.07	-4.02	16.90	-	-
	5825	165	AVG	17.95	17.76	20.87	30.00	-9.13	-4.02	16.84	-	-

Table 7-12. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5180	36	AVG	17.94	17.76	20.77	23.98	-3.21	-2.76	18.01	23.01	-5.00
	5200	40	AVG	17.98	17.88	20.89	23.98	-3.09	-2.76	18.13	23.01	-4.88
	5220	44	AVG	17.99	17.95	20.96	23.98	-3.02	-2.76	18.20	23.01	-4.81
	5240	48	AVG	17.68	17.98	20.99	23.98	-2.99	-2.76	18.23	23.01	-4.78
	5260	52	AVG	17.76	17.91	20.92	23.98	-3.06	-2.76	18.16	30.00	-11.84
	5280	56	AVG	17.90	17.99	21.00	23.98	-2.98	-2.76	18.24	30.00	-11.76
	5300	60	AVG	17.89	17.69	20.70	23.98	-3.28	-2.76	17.94	30.00	-12.06
	5320	64	AVG	17.77	17.62	20.63	23.98	-3.35	-2.76	17.87	30.00	-12.13
	5500	100	AVG	17.94	17.86	20.87	23.98	-3.11	-4.96	15.91	30.00	-14.09
	5600	120	AVG	17.66	17.74	20.75	23.98	-3.23	-4.02	16.73	-	-
	5620	124	AVG	17.72	17.71	20.72	23.98	-3.26	-4.02	16.70	-	-
	5720	144	AVG	17.82	17.96	20.97	23.98	-3.01	-4.02	16.95	30.00	-13.05
	5745	149	AVG	17.89	17.66	20.67	30.00	-9.33	-4.02	16.65	-	-
	5785	157	AVG	17.91	17.84	20.85	30.00	-9.15	-4.02	16.83	-	-
	5825	165	AVG	17.93	17.77	20.78	30.00	-9.22	-4.02	16.76	-	-

Table 7-13. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 90 of 248

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5180	36	AVG	17.96	17.73	20.74	23.98	-3.24	-2.76	17.98	23.01	-5.03
	5200	40	AVG	17.69	17.94	20.95	23.98	-3.03	-2.76	18.19	23.01	-4.82
	5220	44	AVG	17.64	17.97	20.98	23.98	-3.00	-2.76	18.22	23.01	-4.79
	5240	48	AVG	17.67	17.99	21.00	23.98	-2.98	-2.76	18.24	23.01	-4.77
	5260	52	AVG	17.71	17.89	20.90	23.98	-3.08	-2.76	18.14	30.00	-11.86
	5280	56	AVG	17.79	17.98	20.99	23.98	-2.99	-2.76	18.23	30.00	-11.77
	5300	60	AVG	17.91	17.66	20.67	23.98	-3.31	-2.76	17.91	30.00	-12.09
	5320	64	AVG	17.76	17.97	20.98	23.98	-3.00	-2.76	18.22	30.00	-11.78
	5500	100	AVG	17.98	17.82	20.83	23.98	-3.15	-4.96	15.87	30.00	-14.13
	5600	120	AVG	17.75	17.73	20.74	23.98	-3.24	-4.02	16.72	-	-
	5620	124	AVG	17.81	17.69	20.70	23.98	-3.28	-4.02	16.68	-	-
	5720	144	AVG	17.82	17.98	20.99	23.98	-2.99	-4.02	16.97	30.00	-13.03
	5745	149	AVG	17.96	17.81	20.82	30.00	-9.18	-4.02	16.80	-	-
	5785	157	AVG	17.99	17.78	20.79	30.00	-9.21	-4.02	16.77	-	-
	5825	165	AVG	17.56	17.76	20.77	30.00	-9.23	-4.02	16.75	-	-

Table 7-14. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5180	36	AVG	12.39	12.95	15.69	23.98	-8.29	-2.76	12.93	23.01	-10.08
	5200	40	AVG	12.46	12.96	15.73	23.98	-8.25	-2.76	12.97	23.01	-10.04
	5220	44	AVG	12.41	12.99	15.72	23.98	-8.26	-2.76	12.96	23.01	-10.05
	5240	48	AVG	12.33	12.97	15.67	23.98	-8.31	-2.76	12.92	23.01	-10.09
	5260	52	AVG	12.38	12.75	15.58	23.98	-8.40	-2.76	12.82	30.00	-17.18
	5280	56	AVG	12.33	12.82	15.59	23.98	-8.39	-2.76	12.84	30.00	-17.16
	5300	60	AVG	12.31	12.87	15.61	23.98	-8.37	-2.76	12.85	30.00	-17.15
	5320	64	AVG	12.27	12.78	15.54	23.98	-8.44	-2.76	12.79	30.00	-17.21
	5500	100	AVG	13.16	12.56	15.88	23.98	-8.10	-4.96	10.92	30.00	-19.08
	5600	120	AVG	13.14	12.64	15.91	23.98	-8.07	-4.02	11.88	-	-
	5620	124	AVG	13.19	12.72	15.97	23.98	-8.01	-4.02	11.95	-	-
	5720	144	AVG	12.92	12.41	15.68	23.98	-8.30	-4.02	11.66	30.00	-18.34
	5745	149	AVG	12.15	12.93	15.57	30.00	-14.43	-4.02	11.54	-	-
	5785	157	AVG	12.24	12.92	15.60	30.00	-14.40	-4.02	11.58	-	-
	5825	165	AVG	12.49	13.28	15.91	30.00	-14.09	-4.02	11.89	-	-

Table 7-15. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5190	38	AVG	14.85	14.92	17.93	23.98	-6.05	-2.76	15.17	23.01	-7.84
	5230	46	AVG	16.86	16.97	19.98	23.98	-4.00	-2.76	17.22	23.01	-5.79
	5270	54	AVG	16.97	16.90	19.91	23.98	-4.07	-2.76	17.15	30.00	-12.85
	5310	62	AVG	15.07	15.12	18.13	23.98	-5.85	-2.76	15.37	30.00	-14.63
	5510	102	AVG	15.07	15.19	18.20	23.98	-5.78	-2.76	15.44	30.00	-14.56
	5590	118	AVG	16.83	16.77	19.78	23.98	-4.20	-4.02	15.76	-	-
	5630	126	AVG	16.94	16.93	19.94	23.98	-4.04	-4.02	15.92	-	-
	5710	142	AVG	16.99	16.79	19.80	23.98	-4.18	-4.02	15.78	30.00	-14.22
	5755	151	AVG	16.98	16.62	19.63	30.00	-10.37	-4.02	15.61	-	-
	5795	159	AVG	16.86	16.98	19.99	30.00	-10.01	-4.02	15.97	-	-

Table 7-16. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF900F	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 91 of 248

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5190	38	AVG	14.67	14.78	17.79	23.98	-6.19	-2.76	15.03	23.01	-7.98
	5230	46	AVG	16.85	16.98	19.99	23.98	-3.99	-2.76	17.23	23.01	-5.78
	5270	54	AVG	16.99	16.91	19.92	23.98	-4.06	-2.76	17.16	30.00	-12.84
	5310	62	AVG	14.97	15.14	18.15	23.98	-5.83	-2.76	15.39	30.00	-14.61
	5510	102	AVG	15.02	15.12	18.13	23.98	-5.85	-2.76	15.37	30.00	-14.63
	5590	118	AVG	16.92	16.92	19.93	23.98	-4.05	-4.02	15.91	-	-
	5630	126	AVG	16.97	16.94	19.95	23.98	-4.03	-4.02	15.93	-	-
	5710	142	AVG	16.99	16.97	19.98	23.98	-4.00	-4.02	15.96	30.00	-14.04
	5755	151	AVG	16.96	16.91	19.92	30.00	-10.08	-4.02	15.90	-	-
	5795	159	AVG	16.82	16.78	19.79	30.00	-10.21	-4.02	15.77	-	-

Table 7-17. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5190	38	AVG	10.83	10.28	13.57	23.98	-10.41	-2.76	10.82	23.01	-12.19
	5230	46	AVG	11.06	10.69	13.89	23.98	-10.09	-2.76	11.13	23.01	-11.88
	5270	54	AVG	11.16	10.27	13.75	23.98	-10.23	-2.76	10.99	30.00	-19.01
	5310	62	AVG	10.99	10.42	13.72	23.98	-10.25	-2.76	10.97	30.00	-19.03
	5510	102	AVG	11.12	10.54	13.85	23.98	-10.13	-2.76	11.09	30.00	-18.91
	5590	118	AVG	10.90	10.23	13.59	23.98	-10.39	-4.02	9.56	-	-
	5630	126	AVG	10.97	10.49	13.75	23.98	-10.23	-4.02	9.72	-	-
	5710	142	AVG	11.10	10.60	13.87	23.98	-10.11	-4.02	9.84	30.00	-20.16
	5755	151	AVG	10.12	10.92	13.55	30.00	-16.45	-4.02	9.52	-	-
	5795	159	AVG	10.14	10.96	13.58	30.00	-16.42	-4.02	9.55	-	-

Table 7-18. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5210	42	AVG	9.10	9.96	12.56	23.98	-11.42	-2.76	9.81	23.01	-13.20
	5290	58	AVG	9.74	9.76	12.76	23.98	-11.22	-2.76	10.00	30.00	-20.00
	5530	106	AVG	14.23	14.03	17.14	23.98	-6.84	-2.76	14.39	30.00	-15.61
	5610	122	AVG	15.68	15.71	18.71	23.98	-5.27	-4.02	14.68	-	-
	5690	138	AVG	15.76	15.98	18.88	23.98	-5.10	-4.02	14.86	30.00	-15.14
	5775	155	AVG	15.67	15.99	18.84	30.00	-11.16	-4.02	14.82	-	-

Table 7-19. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	5210	42	AVG	10.51	9.21	12.92	23.98	-11.06	-2.76	10.16	23.01	-12.85
	5290	58	AVG	10.16	8.90	12.59	23.98	-11.39	-2.76	9.83	30.00	-20.17
	5530	106	AVG	9.99	9.72	12.87	23.98	-11.11	-2.76	10.11	30.00	-19.89
	5610	122	AVG	9.69	9.91	12.81	23.98	-11.17	-4.02	8.79	-	-
	5690	138	AVG	9.98	9.92	12.96	23.98	-11.02	-4.02	8.94	30.00	-21.06
	5775	155	AVG	9.12	10.30	12.76	30.00	-17.24	-4.02	8.74	-	-

Table 7-20. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset			Page 92 of 248

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 17.94 dBm for Antenna-1 and 17.76 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(17.94 \text{ dBm} + 17.76 \text{ dBm}) = (62.23 \text{ mW} + 59.70 \text{ mW}) = 121.93 \text{ mW} = 20.77 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average MIMO conducted power was calculated to be 20.77 dBm with directional gain of -2.76 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$20.77 \text{ dBm} + -2.76 \text{ dBi} = 18.01 \text{ dBm}$$

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 93 of 248	

7.5 Maximum Power Spectral Density – 802.11a/n/ac/ax §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span/RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 94 of 248

SISO Antenna-1 Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	6.73	11.0	-4.27
	5200	40	a	6	6.49	11.0	-4.51
	5240	48	a	6	6.06	11.0	-4.94
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.47	11.0	-4.53
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.20	11.0	-4.80
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.83	11.0	-5.17
	5180	36	ax (20MHz)	8.6 (MCS0)	2.91	11.0	-8.09
	5200	40	ax (20MHz)	8.6 (MCS0)	2.41	11.0	-8.59
	5240	48	ax (20MHz)	8.6 (MCS0)	2.93	11.0	-8.07
	5190	38	n (40MHz)	13.5/15 (MCS0)	3.73	11.0	-7.27
	5230	46	n (40MHz)	13.5/15 (MCS0)	1.98	11.0	-9.02
	5190	38	ax (40MHz)	17.2 (MCS0)	-0.28	11.0	-11.28
	5230	46	ax (40MHz)	17.2 (MCS0)	-0.78	11.0	-11.78
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.20	11.0	-14.20
Band 2A	5210	42	ax (80MHz)	36 (MCS0)	-4.54	11.0	-15.54
	5260	52	a	6	5.67	11.0	-5.33
	5280	56	a	6	5.86	11.0	-5.14
	5320	64	a	6	7.13	11.0	-3.87
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	5.68	11.0	-5.32
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	5.56	11.0	-5.44
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.94	11.0	-4.06
	5260	52	ax (20MHz)	8.6 (MCS0)	3.03	11.0	-7.97
	5280	56	ax (20MHz)	8.6 (MCS0)	3.14	11.0	-7.86
	5320	64	ax (20MHz)	8.6 (MCS0)	3.61	11.0	-7.39
	5270	54	n (40MHz)	13.5/15 (MCS0)	2.63	11.0	-8.37
	5310	62	n (40MHz)	13.5/15 (MCS0)	3.34	11.0	-7.66
	5270	54	ax (40MHz)	17.2 (MCS0)	-0.71	11.0	-11.71
	5310	62	ax (40MHz)	17.2 (MCS0)	0.22	11.0	-10.78
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.09	11.0	-14.09
	5210	58	ax (80MHz)	36 (MCS0)	-4.58	11.0	-15.58
	5500	100	a	6	7.33	11.0	-3.67
	5600	120	a	6	6.73	11.0	-4.27
	5720	144	a	6	6.87	11.0	-4.13
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.28	11.0	-4.72
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	5.60	11.0	-5.40
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	5.84	11.0	-5.16
	5500	100	ax (20MHz)	8.6 (MCS0)	3.05	11.0	-7.95
	5600	120	ax (20MHz)	8.6 (MCS0)	2.22	11.0	-8.78
	5720	144	ax (20MHz)	8.6 (MCS0)	2.18	11.0	-8.83
	5510	102	n (40MHz)	13.5/15 (MCS0)	3.10	11.0	-7.90
	5590	118	n (40MHz)	13.5/15 (MCS0)	2.69	11.0	-8.31
	5710	142	n (40MHz)	13.5/15 (MCS0)	3.06	11.0	-7.95
	5510	102	ax (40MHz)	17.2 (MCS0)	-0.44	11.0	-11.44
	5590	118	ax (40MHz)	17.2 (MCS0)	-1.82	11.0	-12.82
	5710	142	ax (40MHz)	17.2 (MCS0)	-1.59	11.0	-12.59
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-0.85	11.0	-11.85
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-3.29	11.0	-14.29
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-1.53	11.0	-12.53
	5530	106	ax (80MHz)	36 (MCS0)	-5.02	11.0	-16.02
	5610	122	ax (80MHz)	36 (MCS0)	-5.52	11.0	-16.52
	5690	138	ax (80MHz)	36 (MCS0)	-5.75	11.0	-16.75

Table 7-21. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1

FCC ID: A3LSMF900F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 95 of 248


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	6.73	-5.50	1.23	10.0	-8.77
	5200	40	a	6	6.49	-5.50	0.99	10.0	-9.01
	5240	48	a	6	6.06	-5.50	0.56	10.0	-9.44
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.47	-5.50	0.97	10.0	-9.03
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.20	-5.50	0.70	10.0	-9.30
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.83	-5.50	0.33	10.0	-9.67
	5190	38	n (40MHz)	13.5/15 (MCS0)	3.73	-5.50	-1.77	10.0	-11.77
	5230	46	n (40MHz)	13.5/15 (MCS0)	1.98	-5.50	-3.52	10.0	-13.52
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.20	-5.50	-8.70	10.0	-18.70

Table 7-22. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED) SISO ANT1

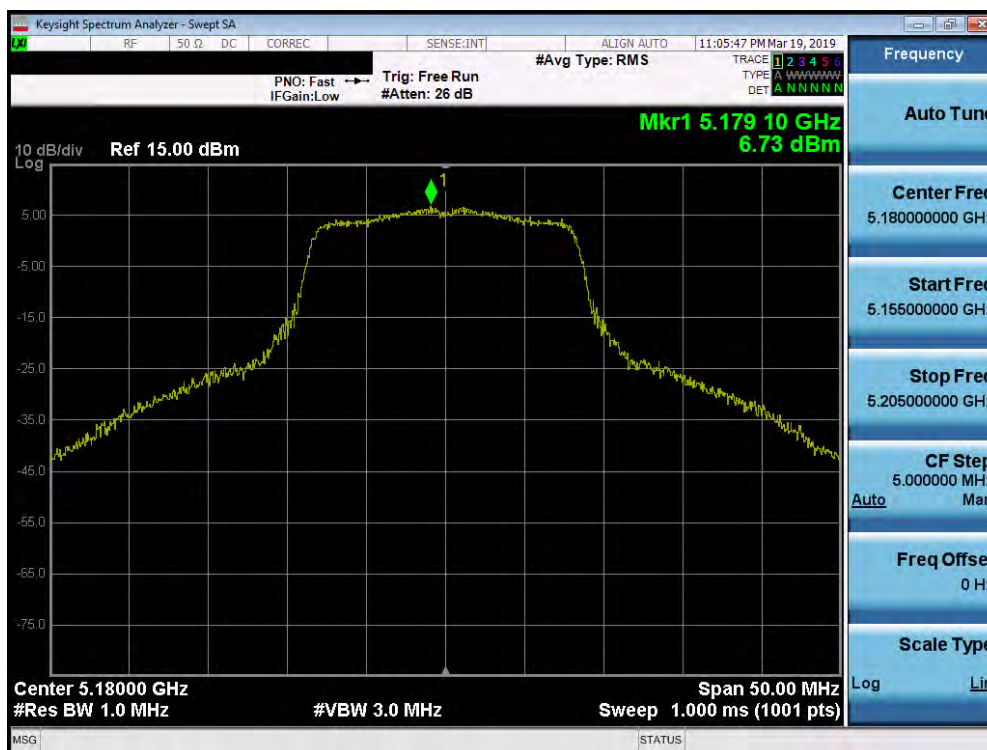


Plot 7-133. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 36)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 96 of 248

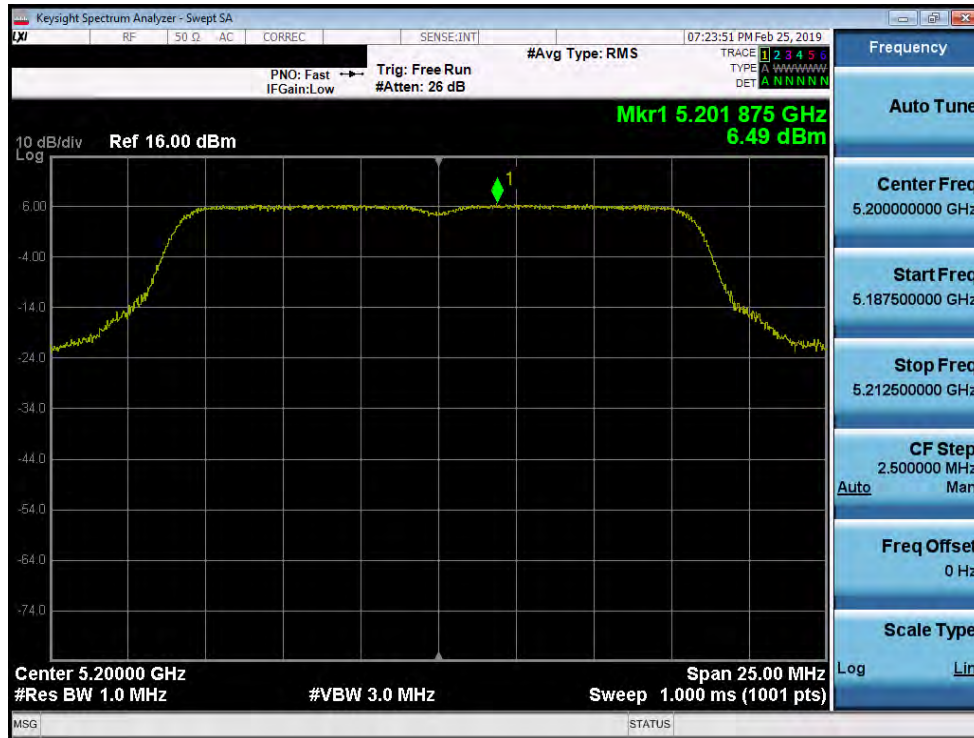


Plot 7-134. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 40)

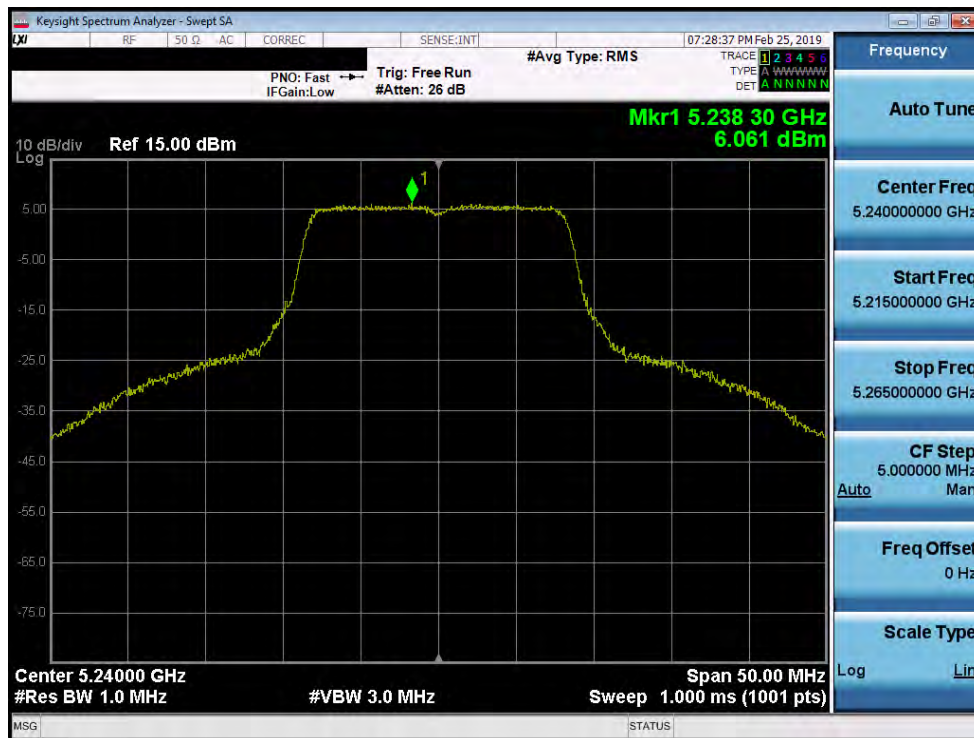


Plot 7-135. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 48)

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 97 of 248		

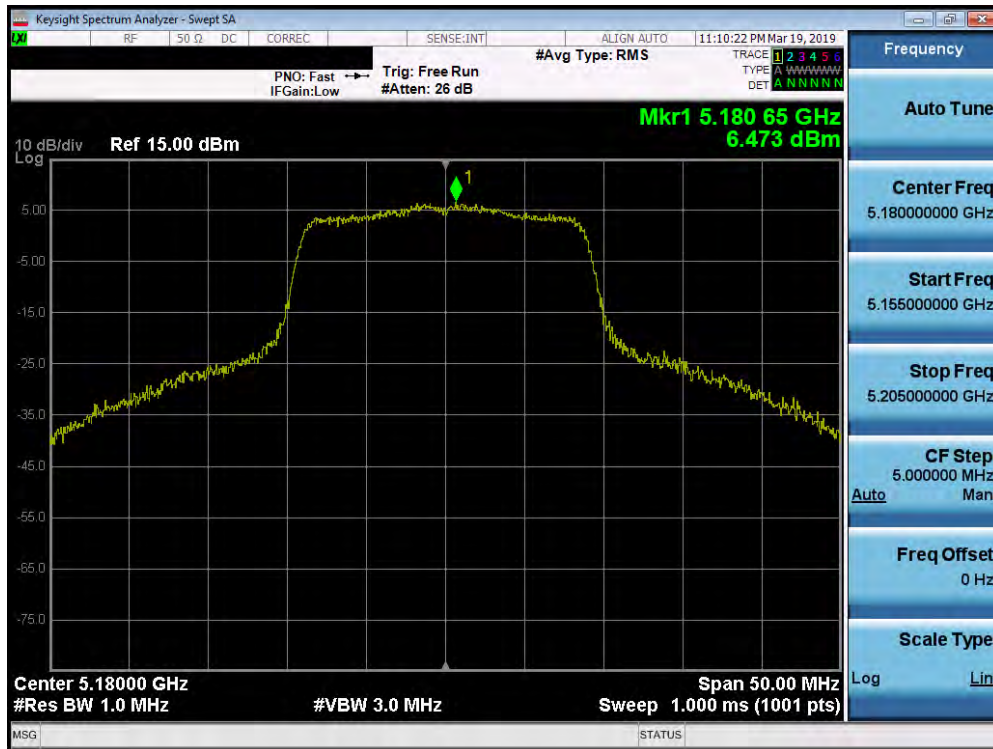


Plot 7-136. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

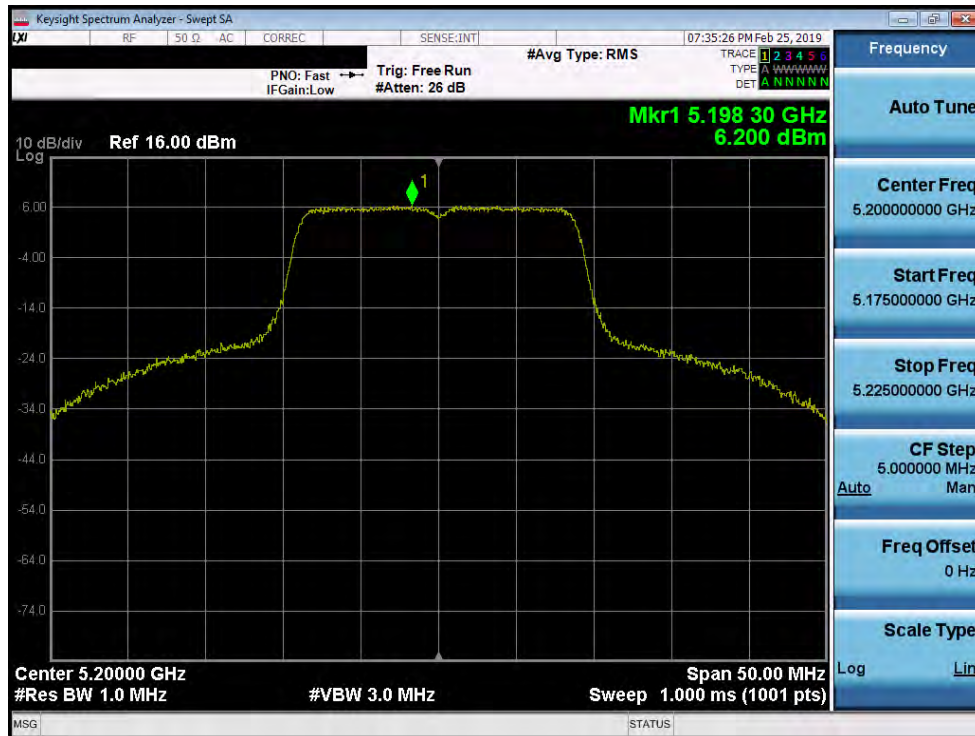


Plot 7-137. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 98 of 248

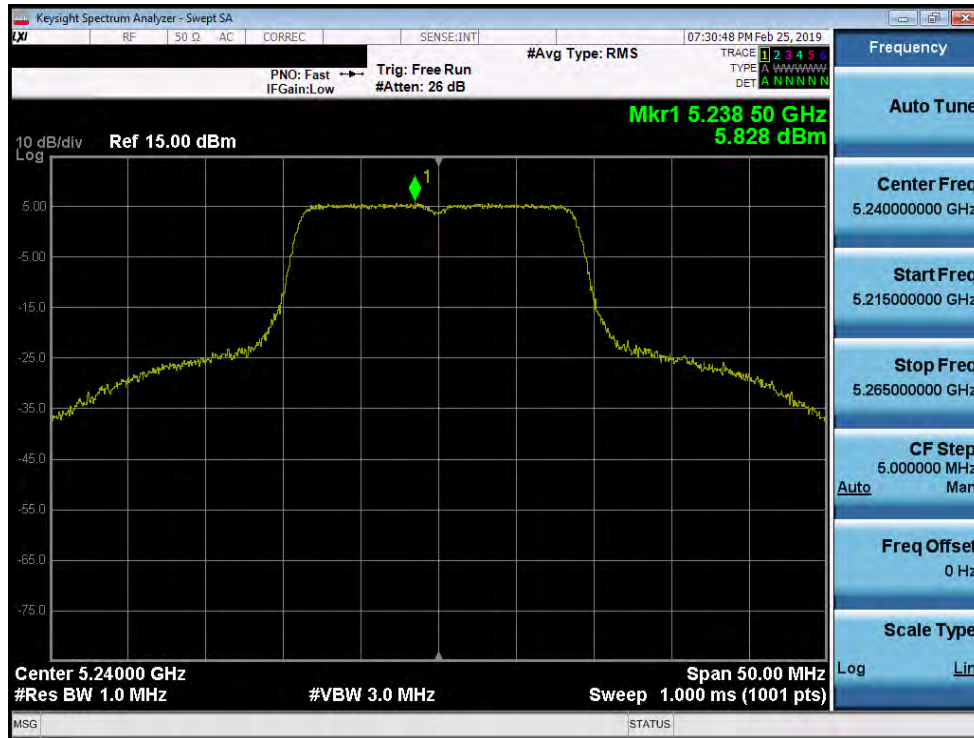


Plot 7-138. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

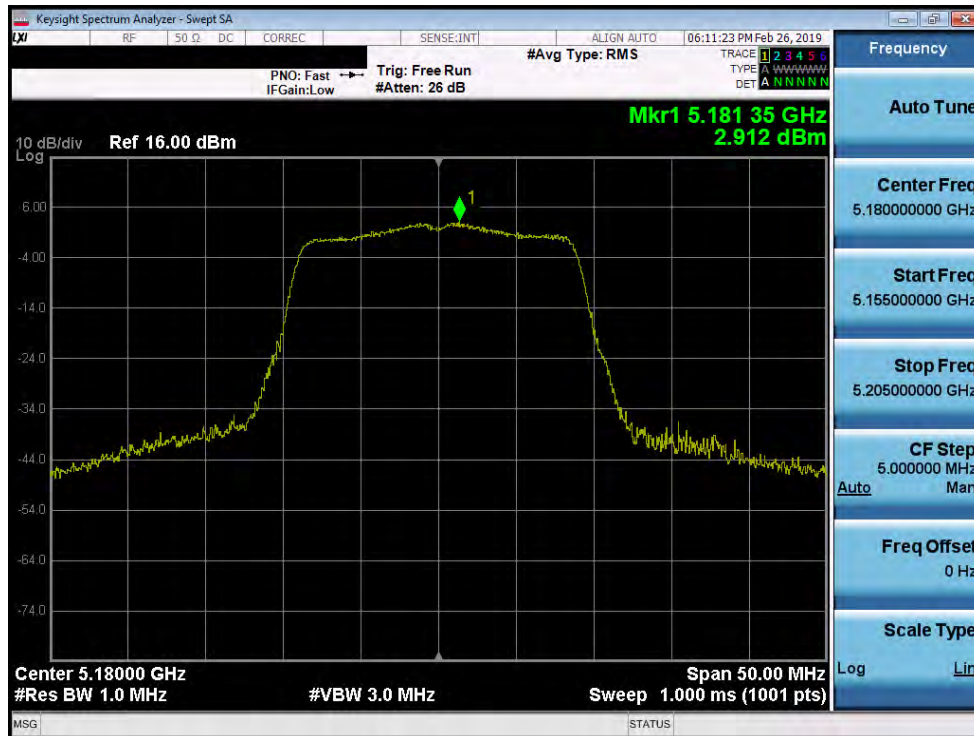


Plot 7-139. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 36)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 99 of 248

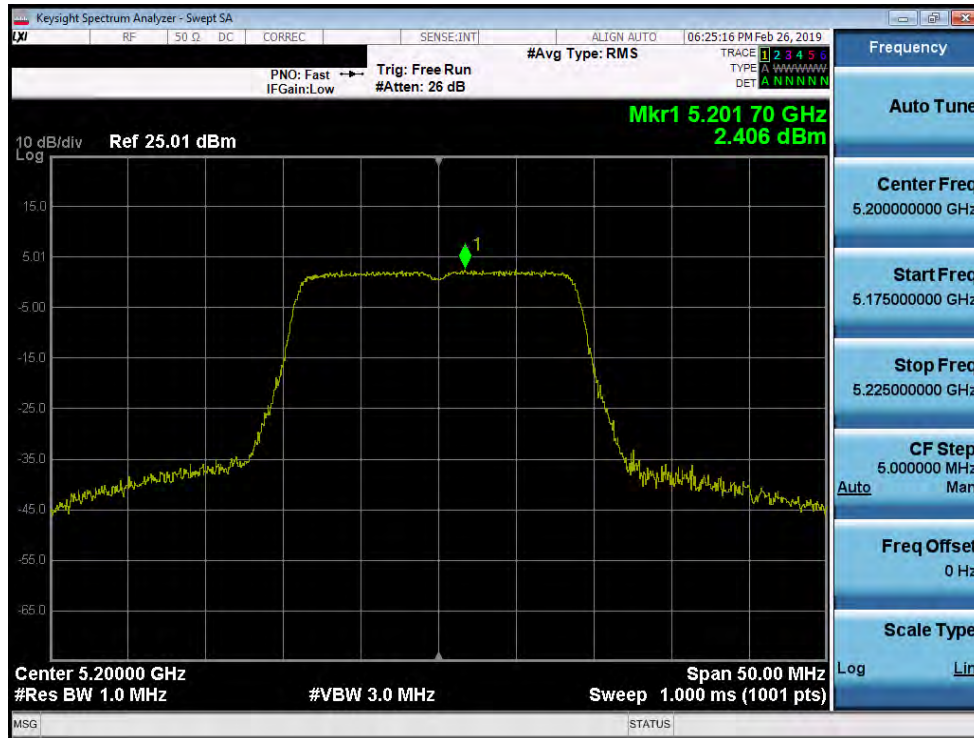


Plot 7-140. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

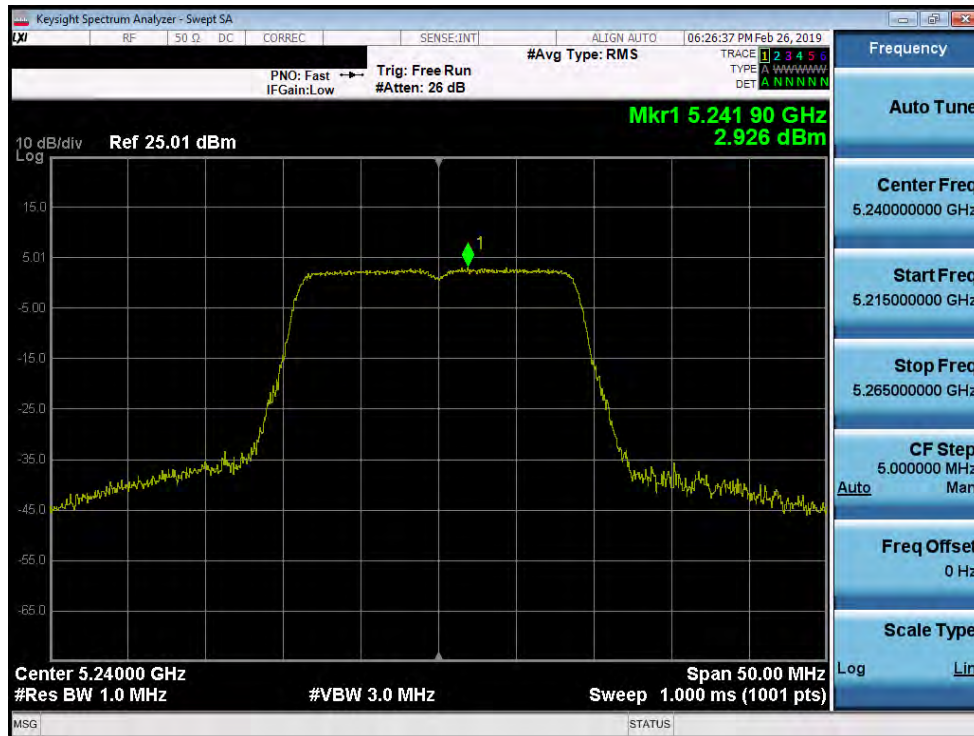


Plot 7-141. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 48)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 100 of 248

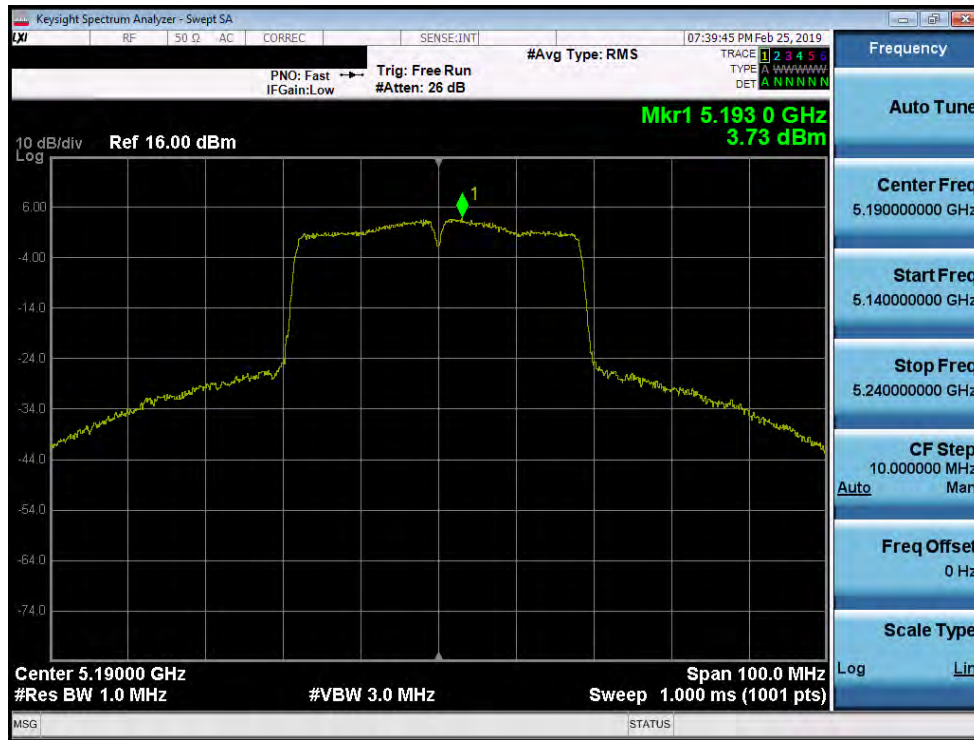


Plot 7-142. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

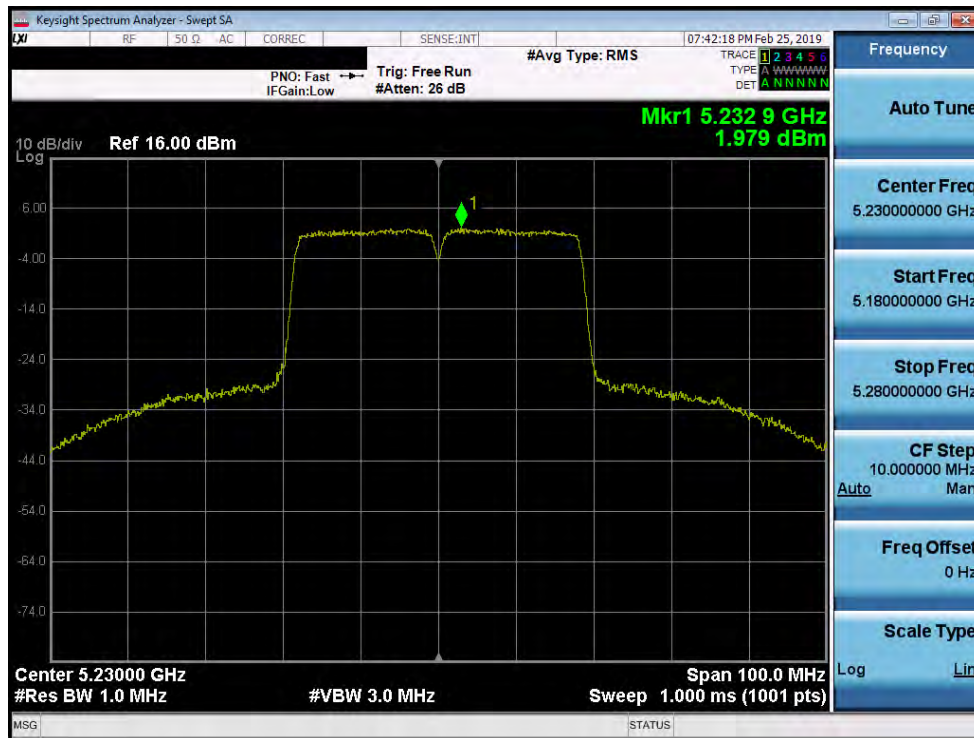


Plot 7-143. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 101 of 248

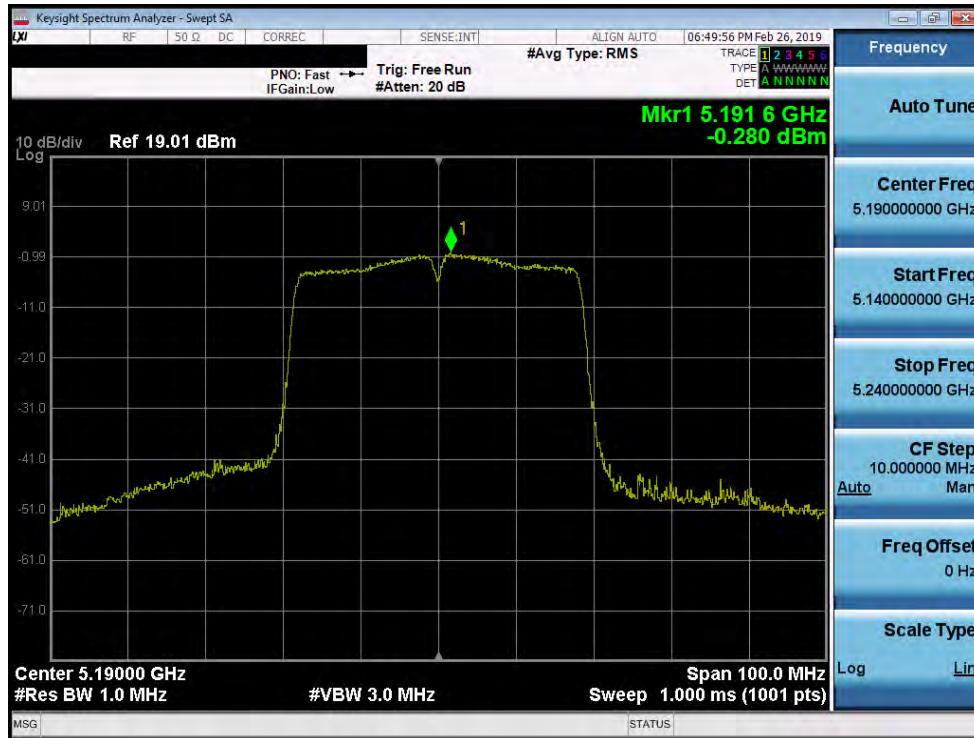


Plot 7-144. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

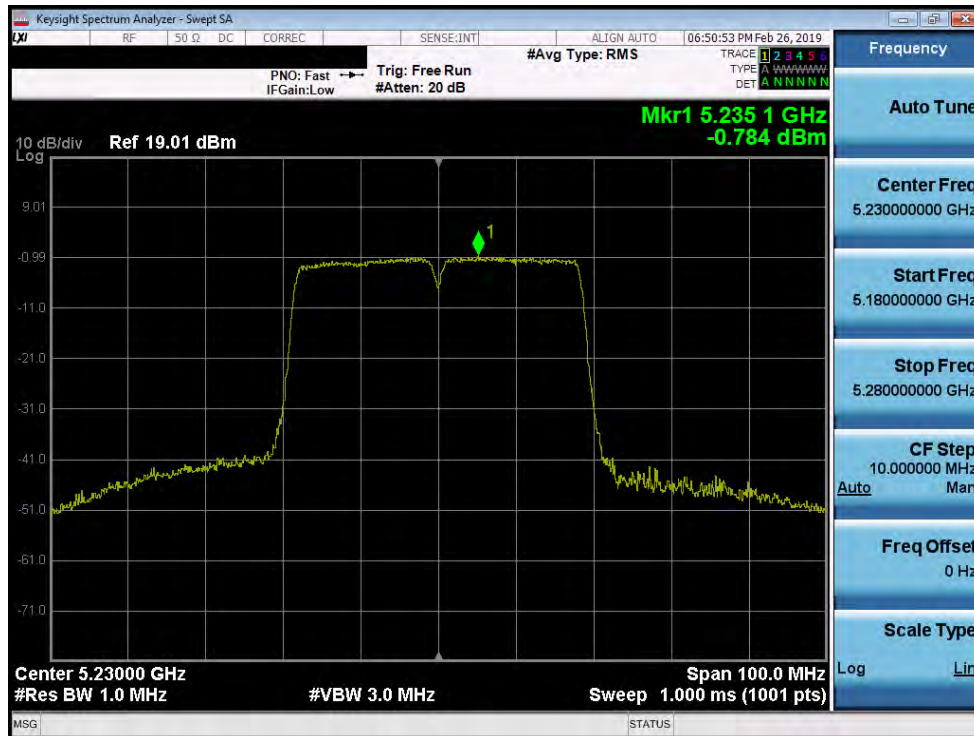


Plot 7-145. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 1) – Ch. 46)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 102 of 248

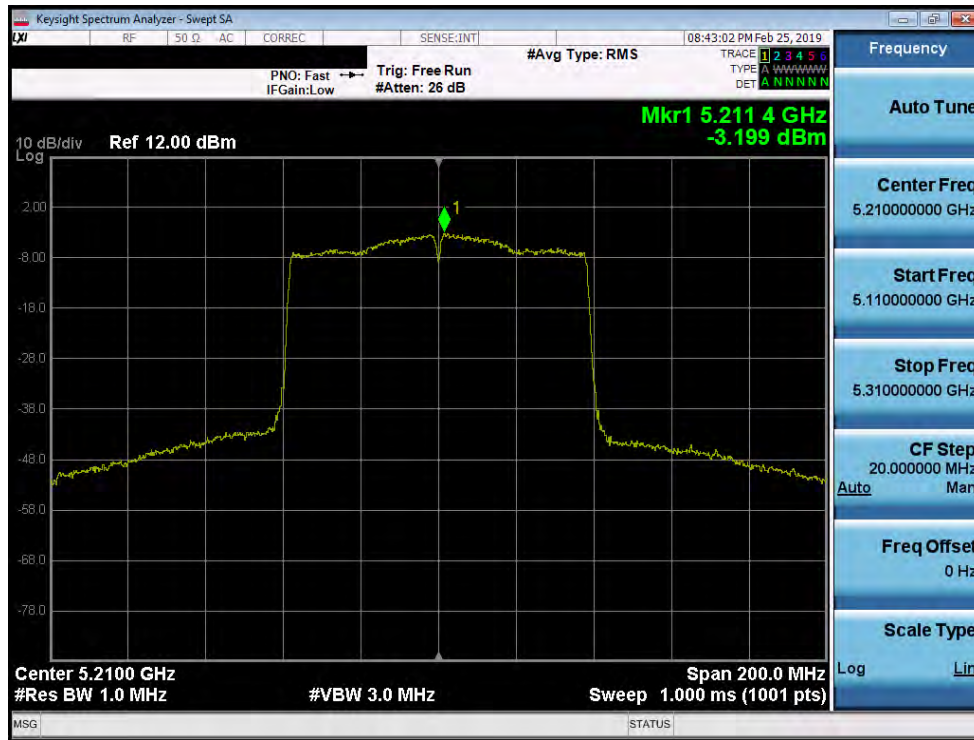


Plot 7-146. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

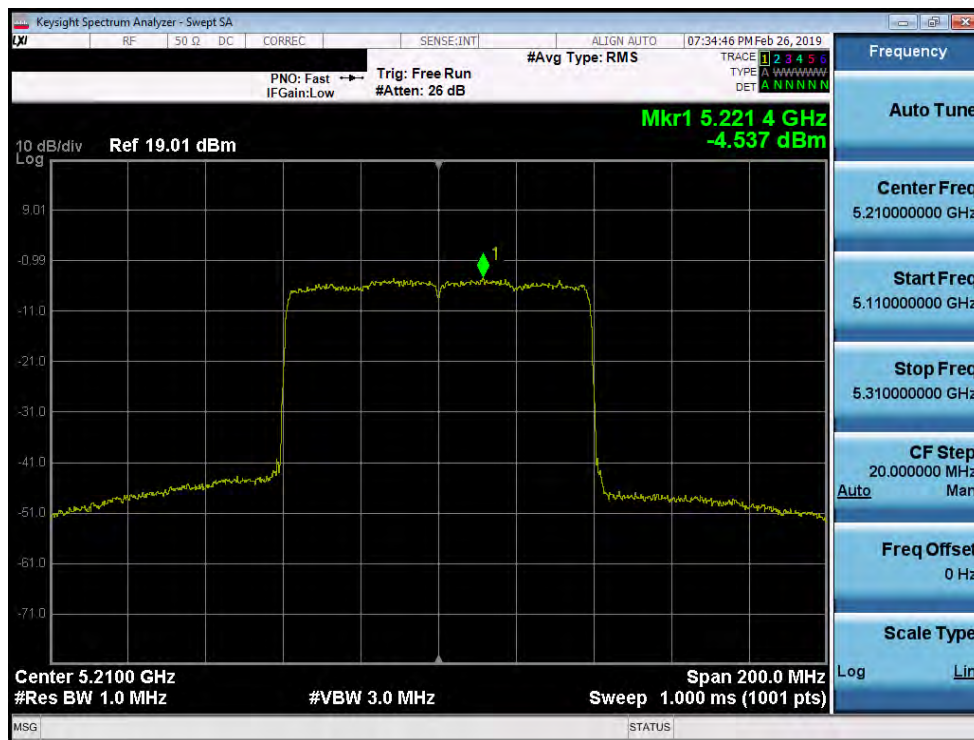


Plot 7-147. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 103 of 248

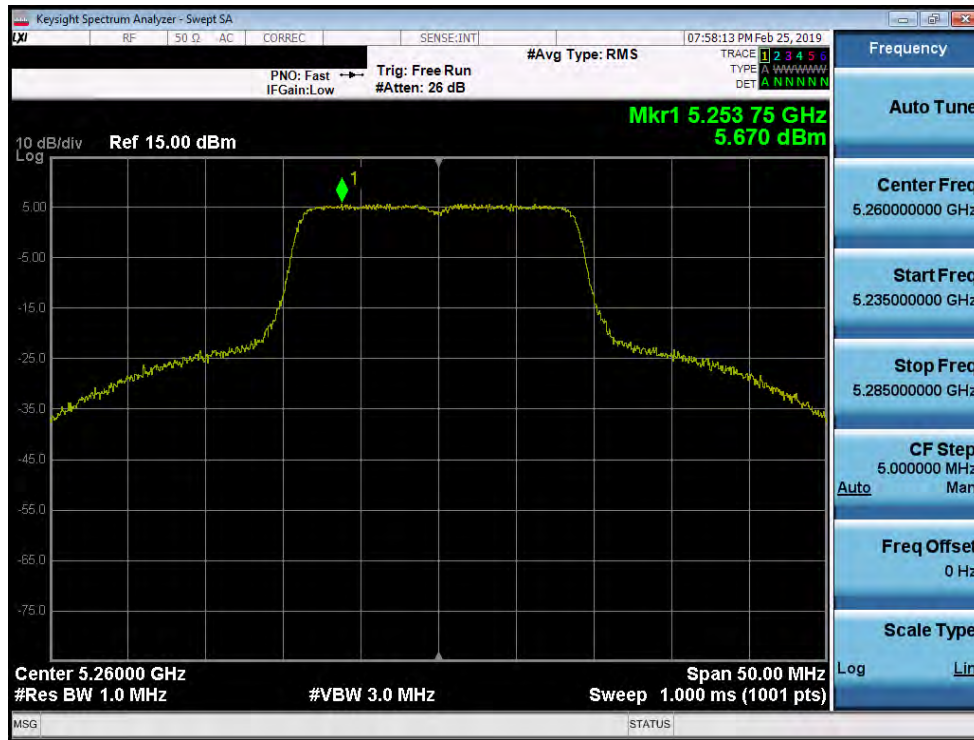


Plot 7-148. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 52)

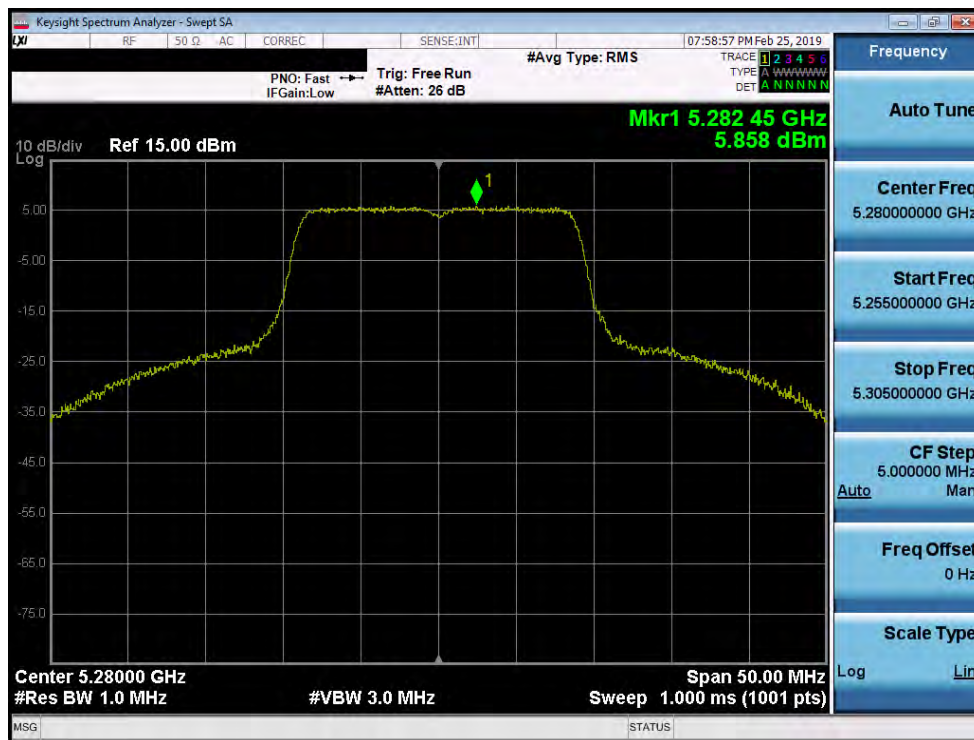


Plot 7-149. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 104 of 248

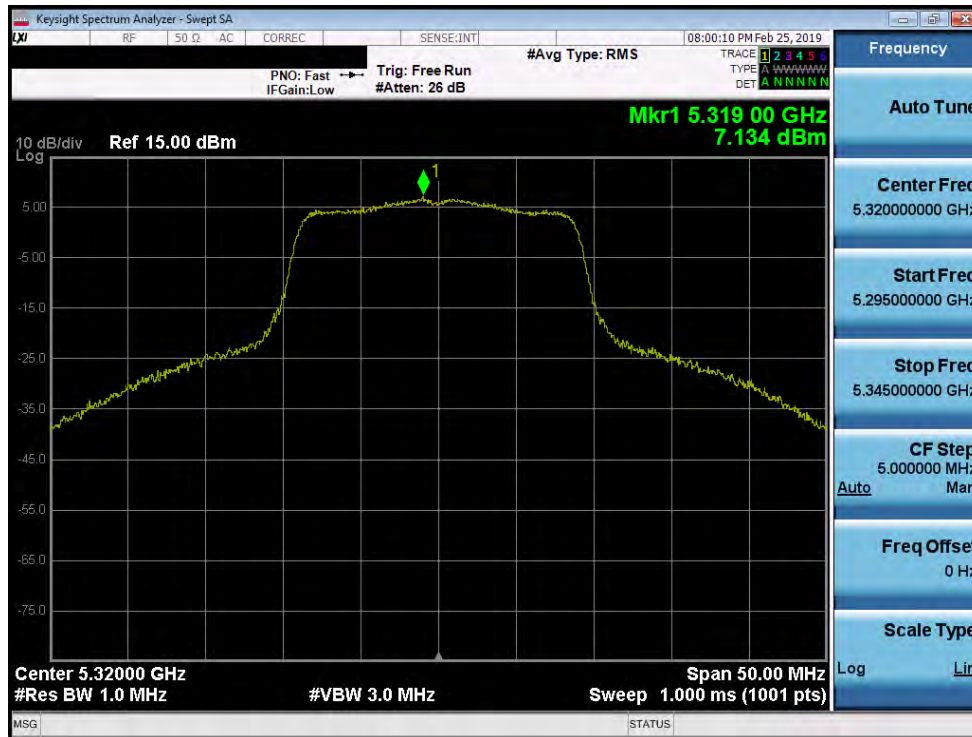


Plot 7-150. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 64)

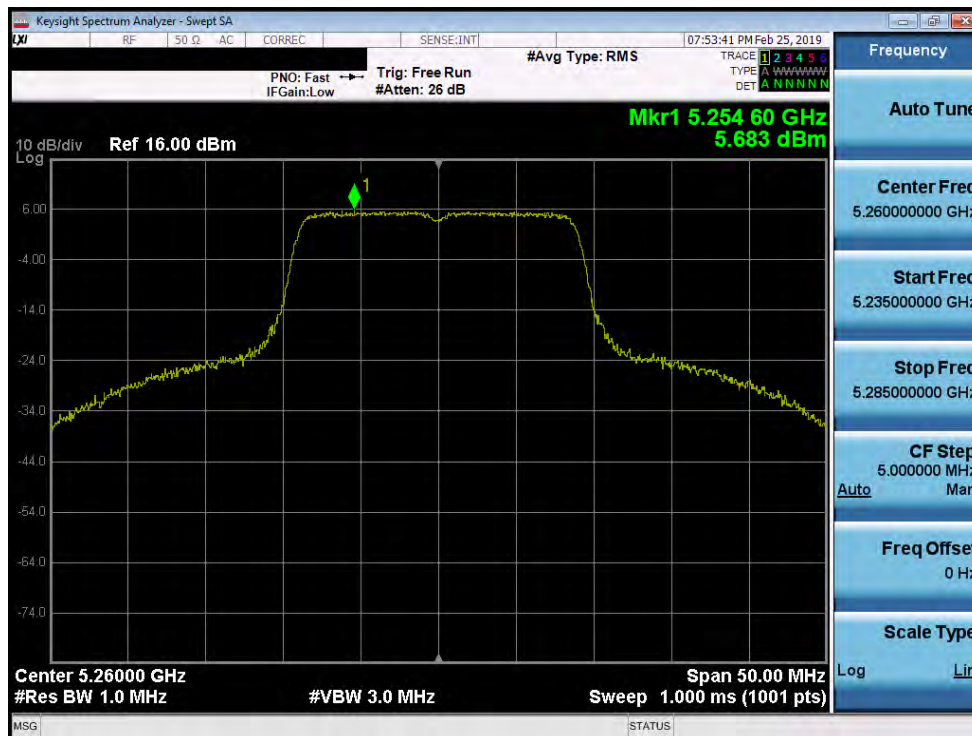


Plot 7-151. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 105 of 248

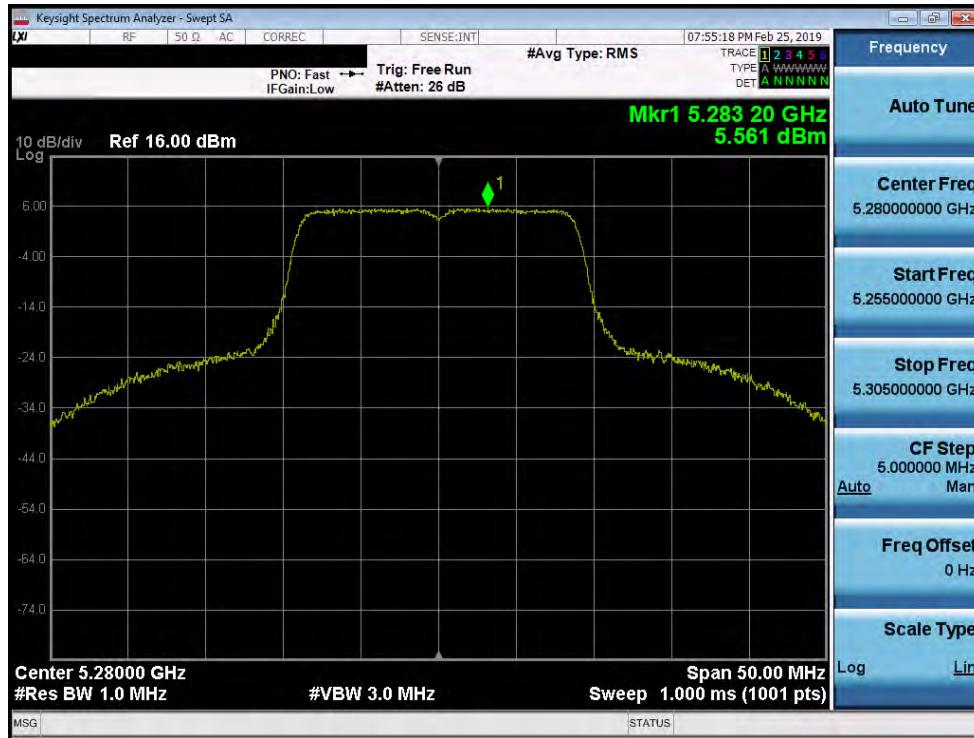


Plot 7-152. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

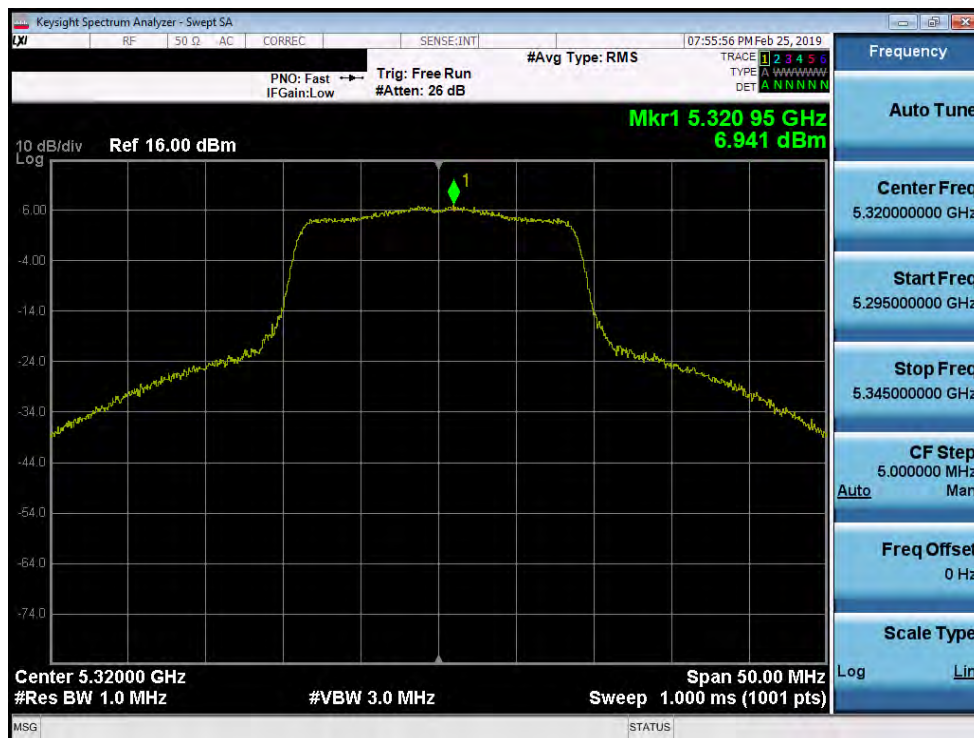


Plot 7-153. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMF900F				Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 106 of 248

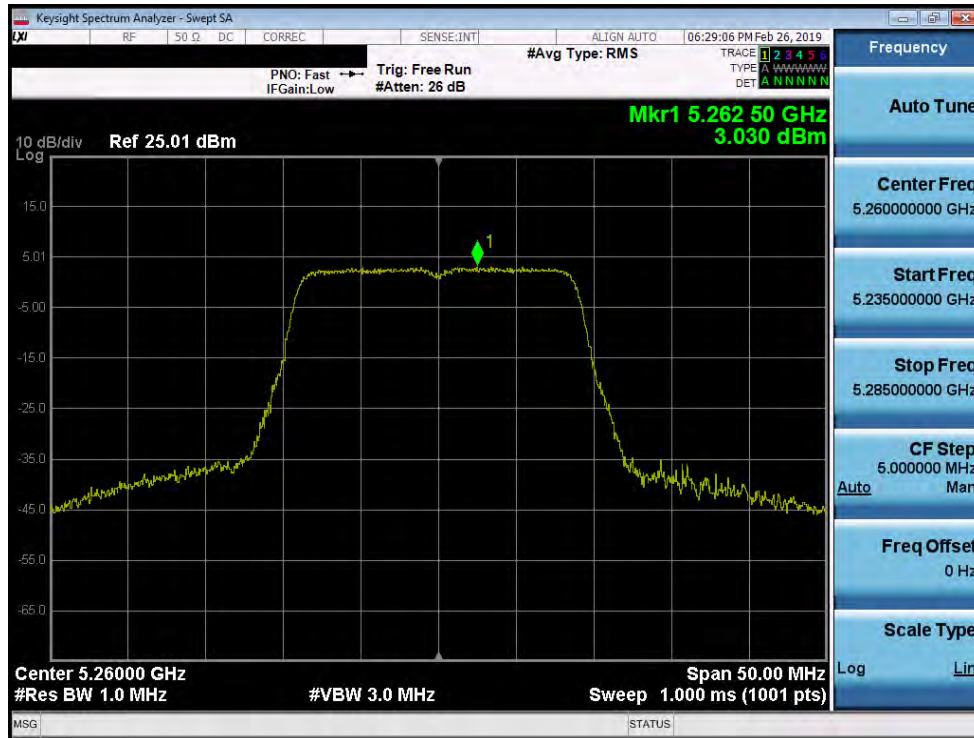


Plot 7-154. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

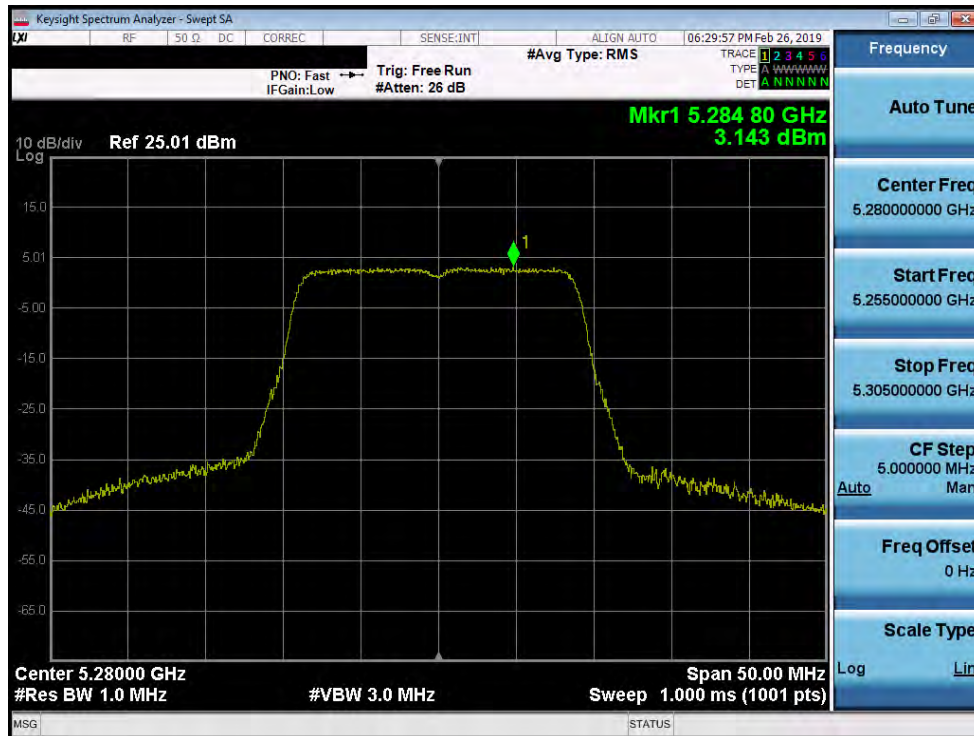


Plot 7-155. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 107 of 248

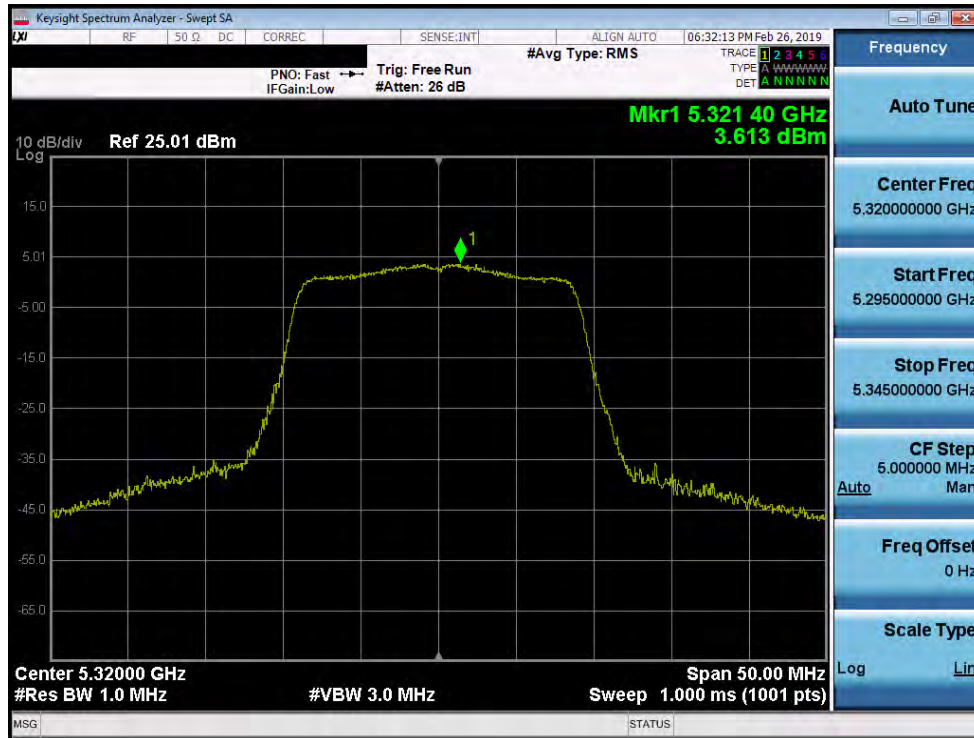


Plot 7-156. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 64)

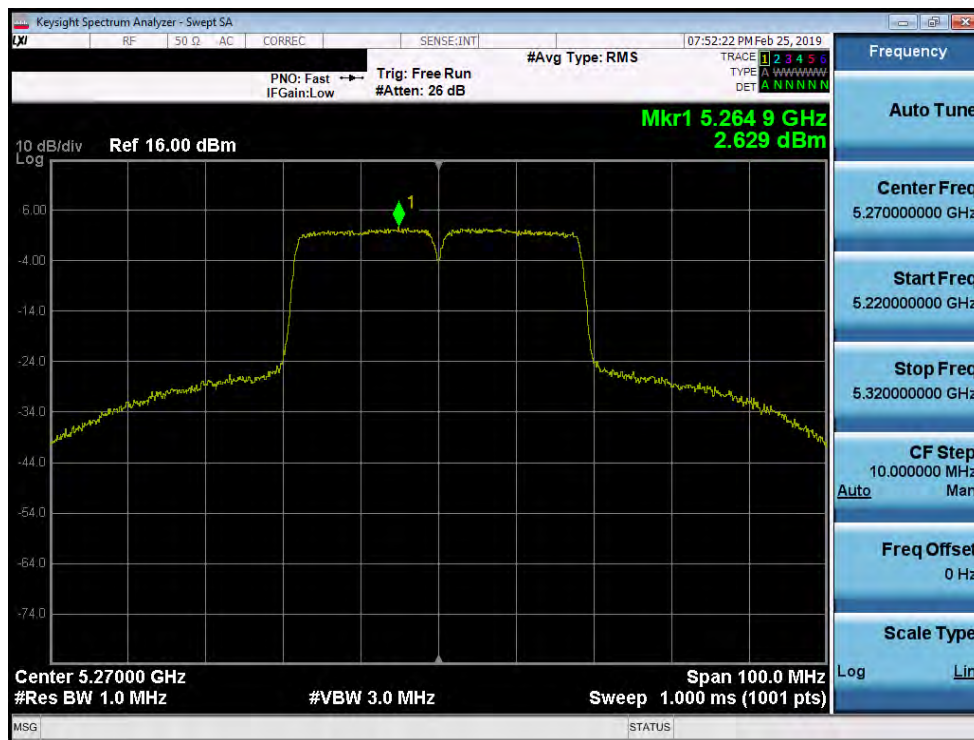


Plot 7-157. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 108 of 248

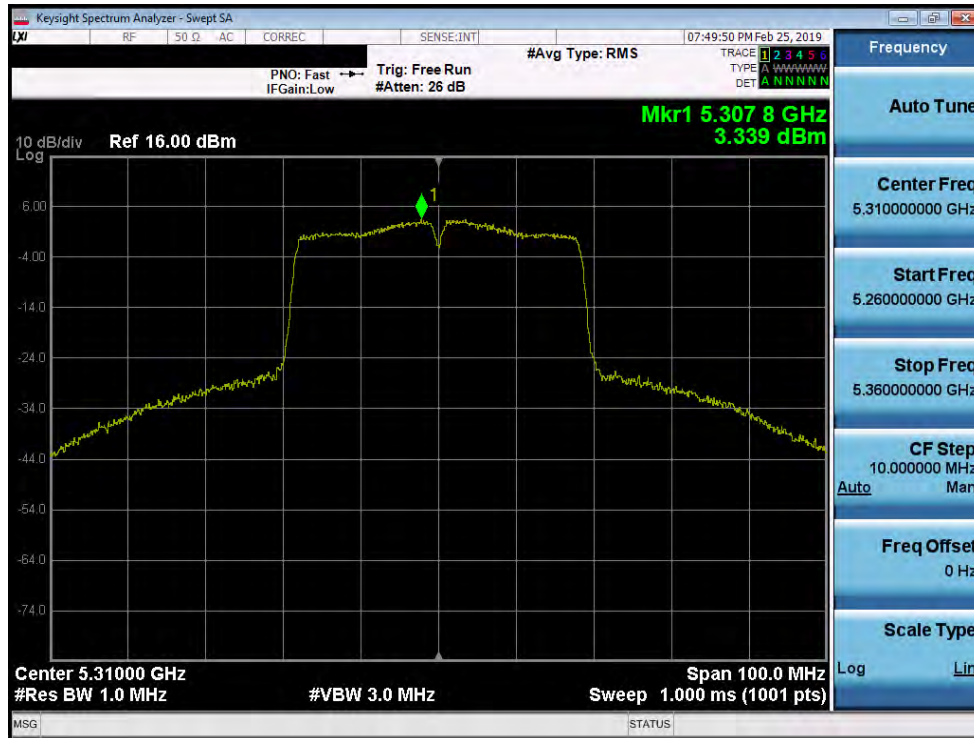


Plot 7-158. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

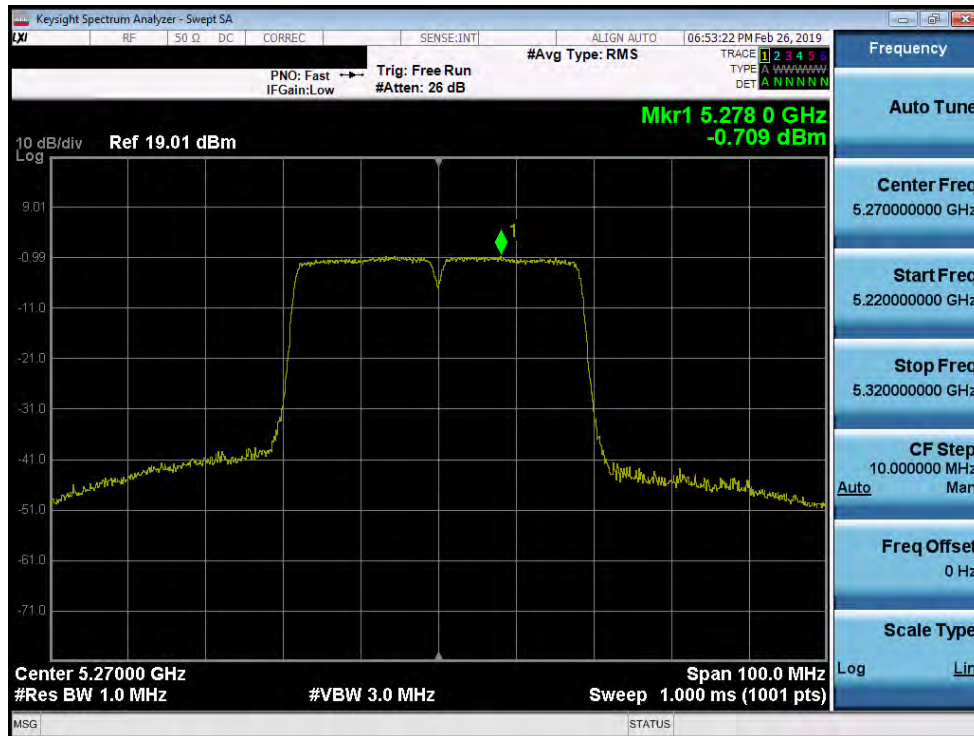


Plot 7-159. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMF900F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset	Page 109 of 248

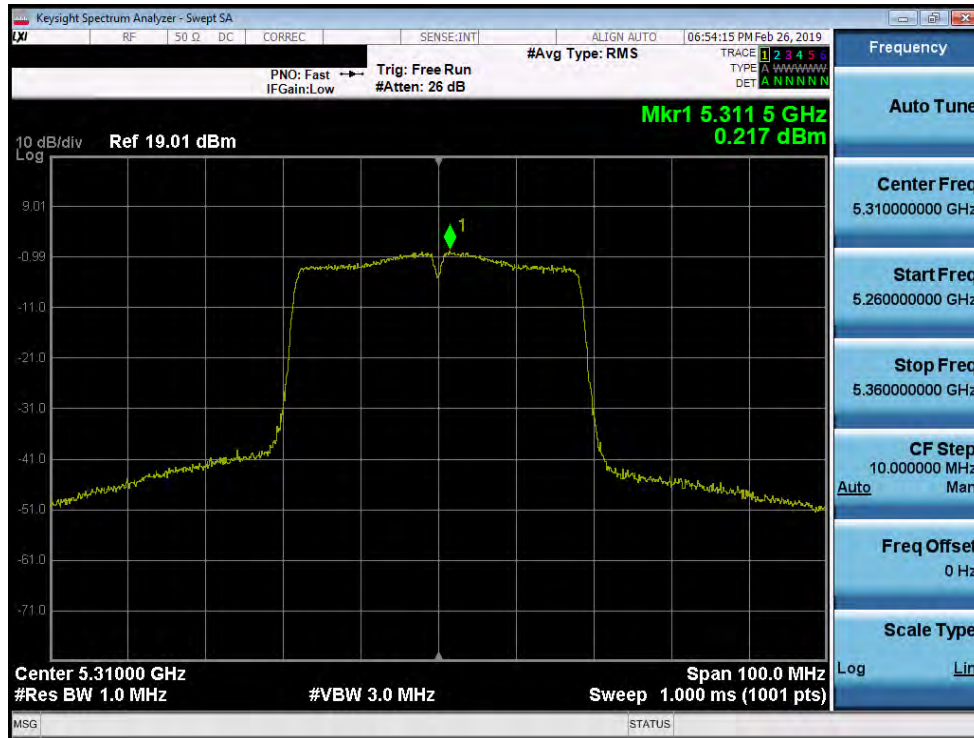


Plot 7-160. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 62)

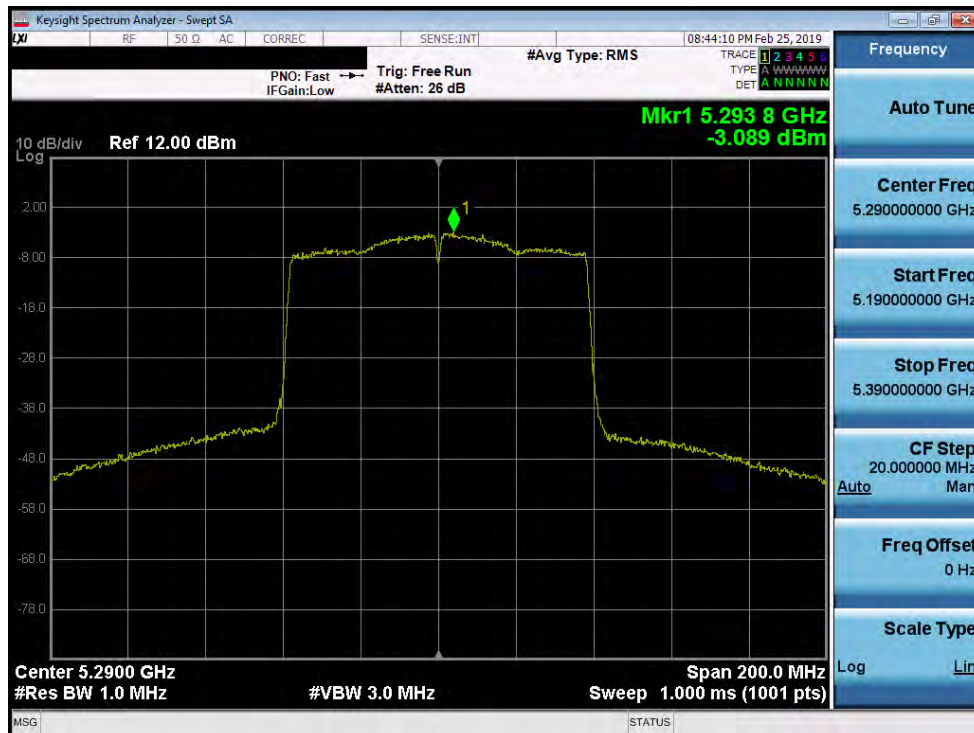


Plot 7-161. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 110 of 248

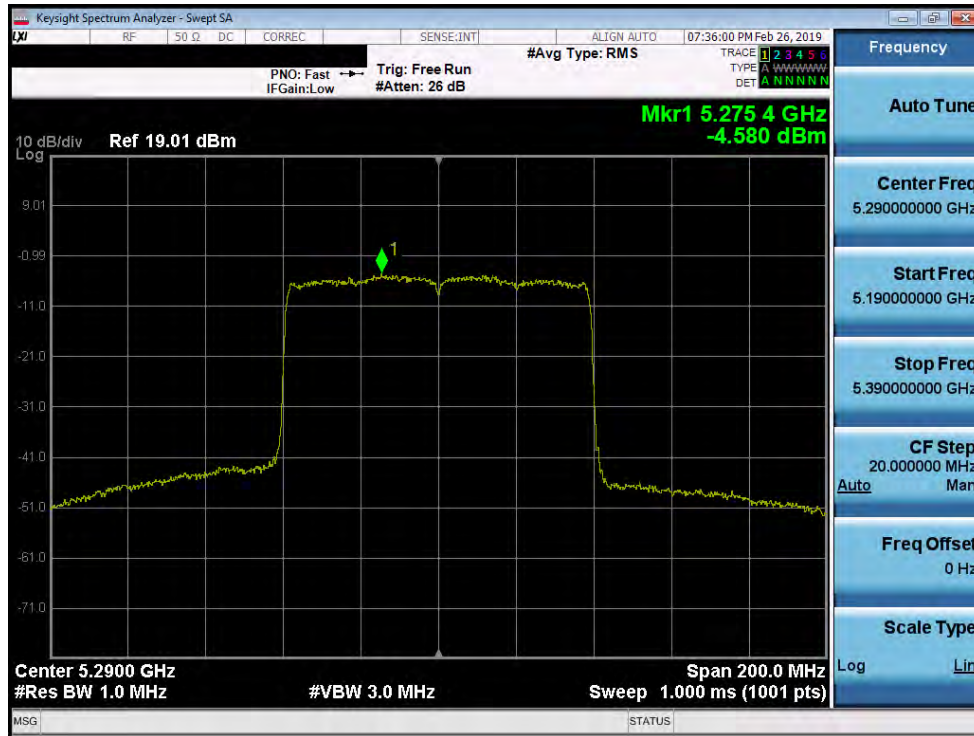


Plot 7-162. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)

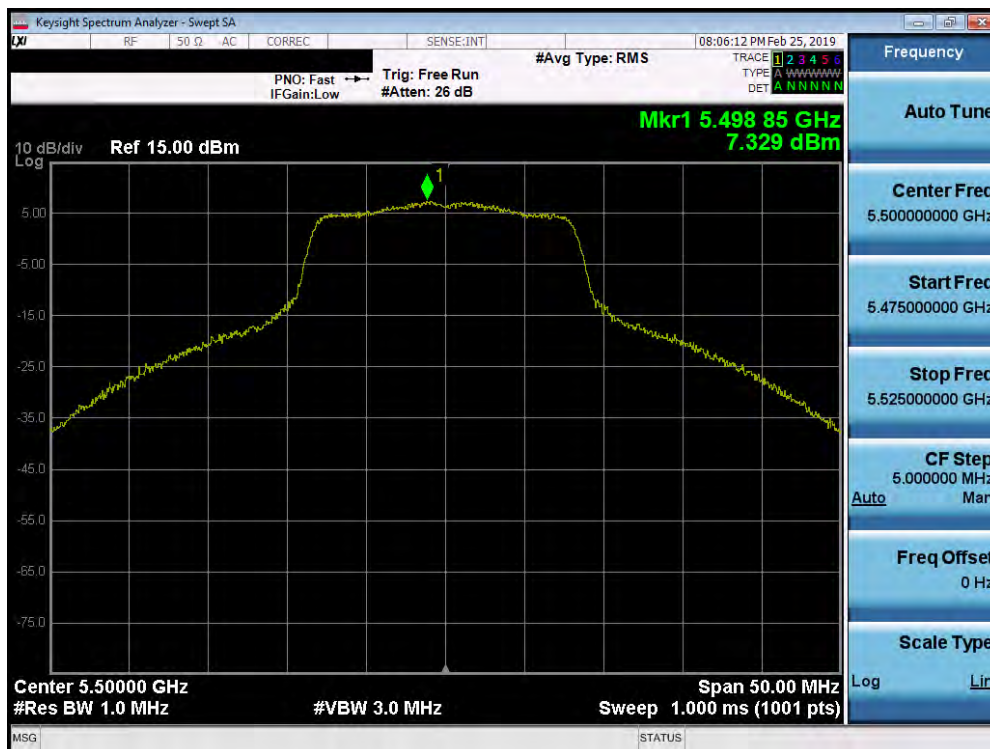


Plot 7-163. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 111 of 248

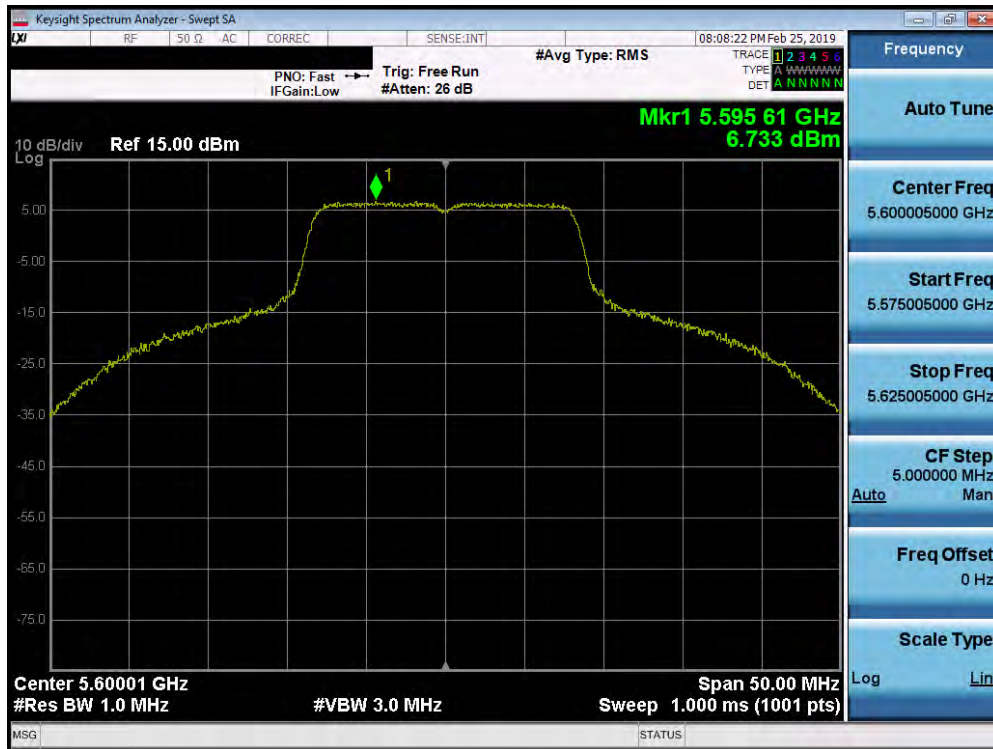


Plot 7-164. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 120)

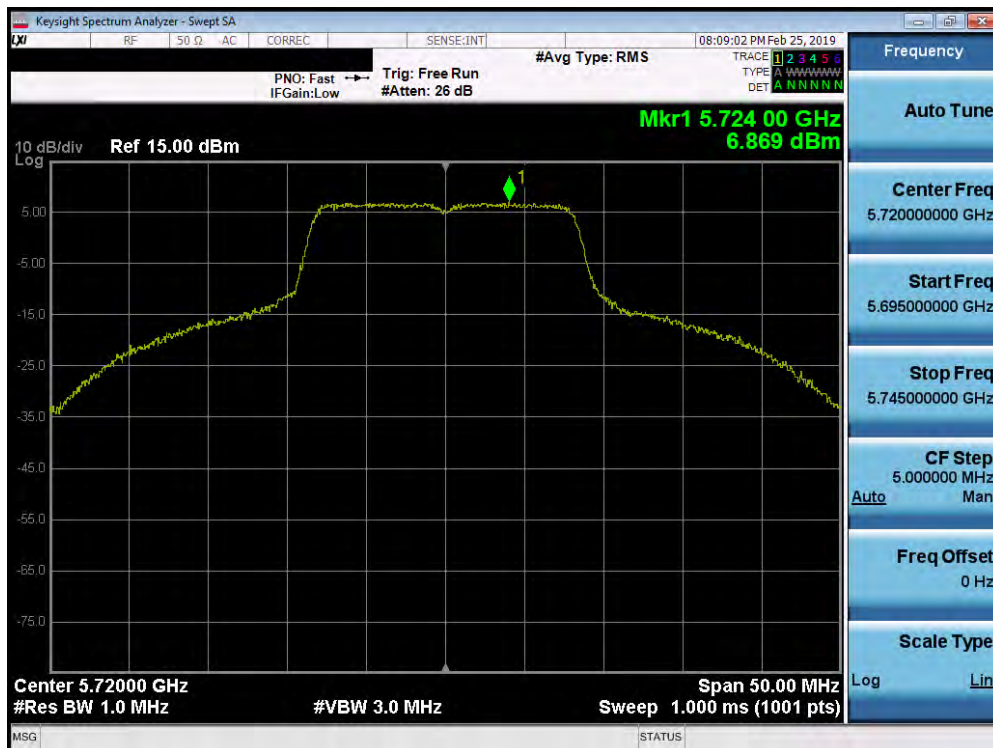


Plot 7-165. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 112 of 248

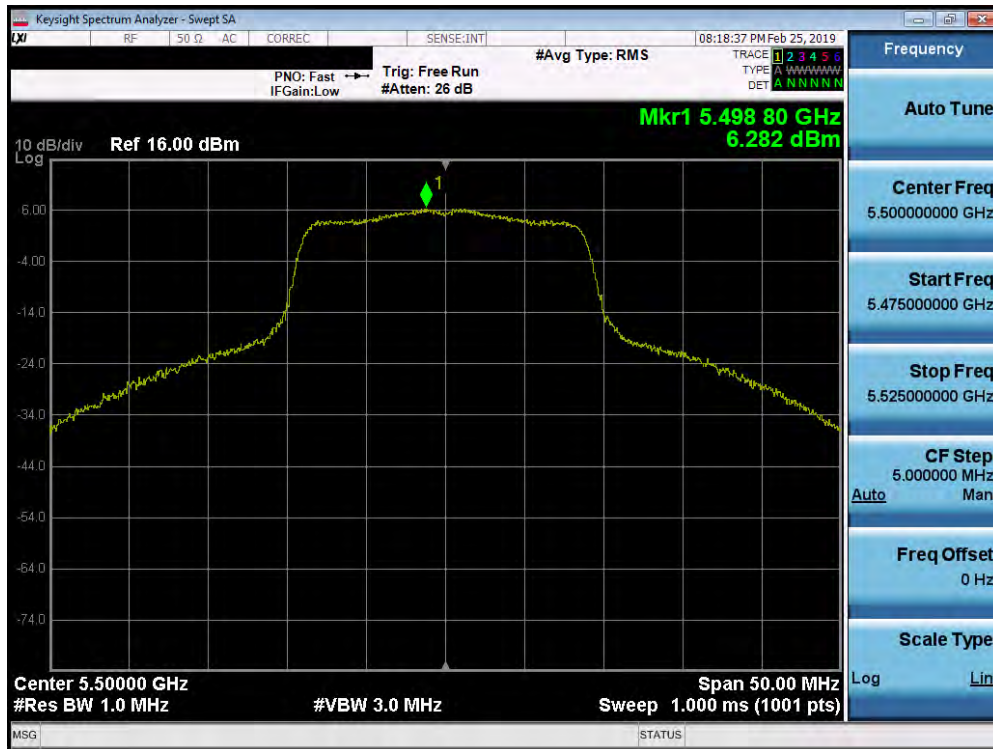


Plot 7-166. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

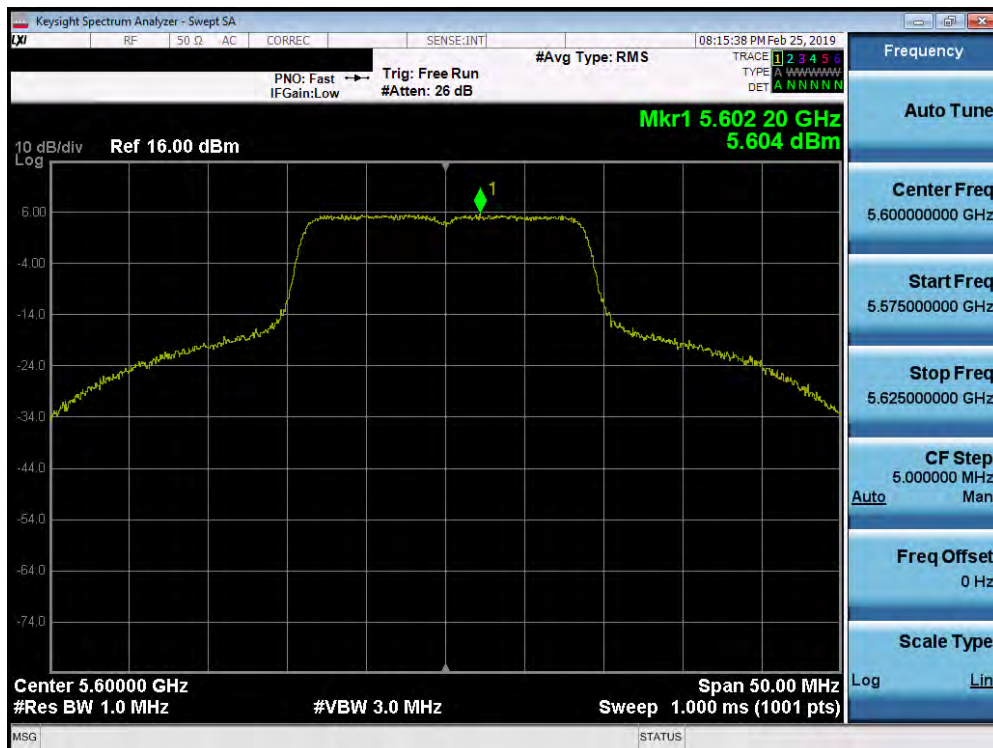


Plot 7-167. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 113 of 248

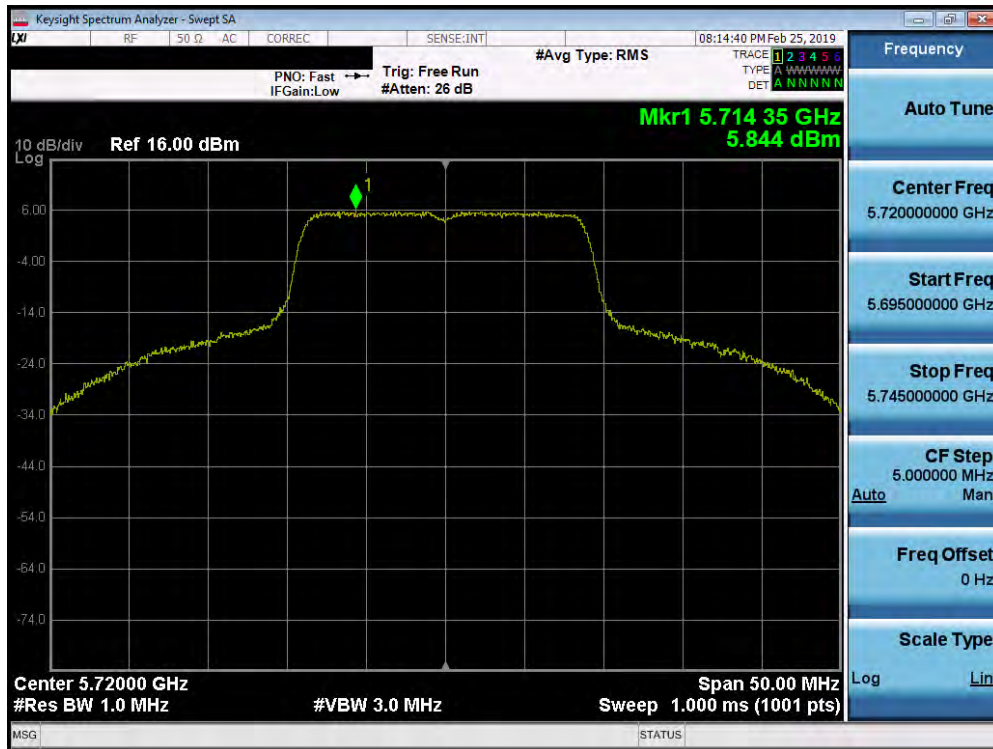


Plot 7-168. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

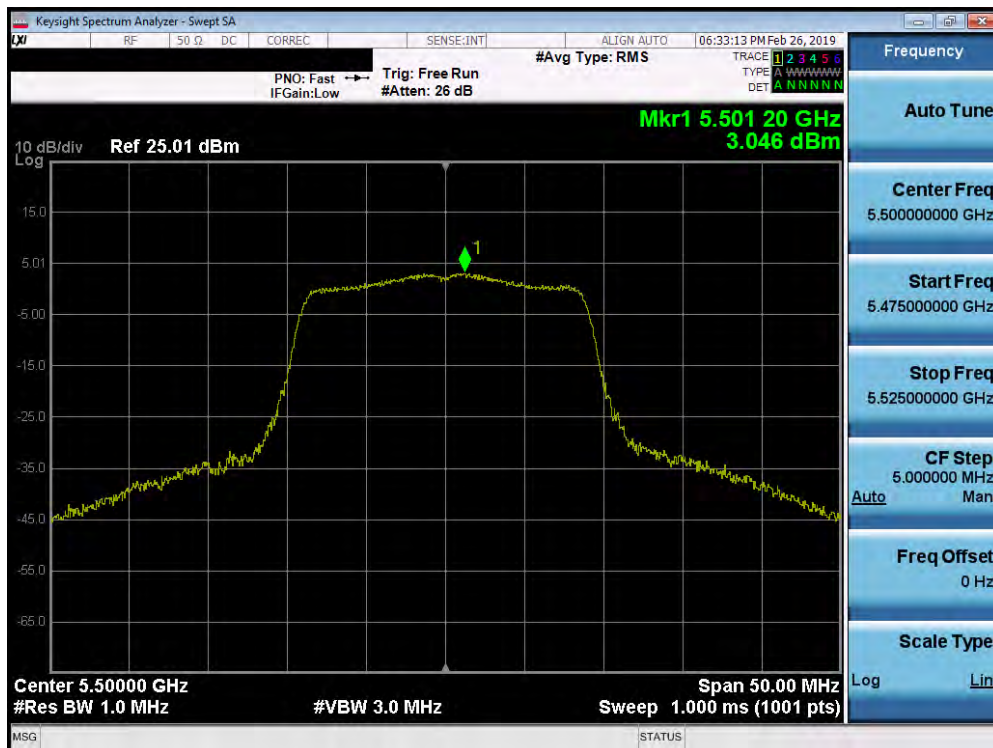


Plot 7-169. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 114 of 248

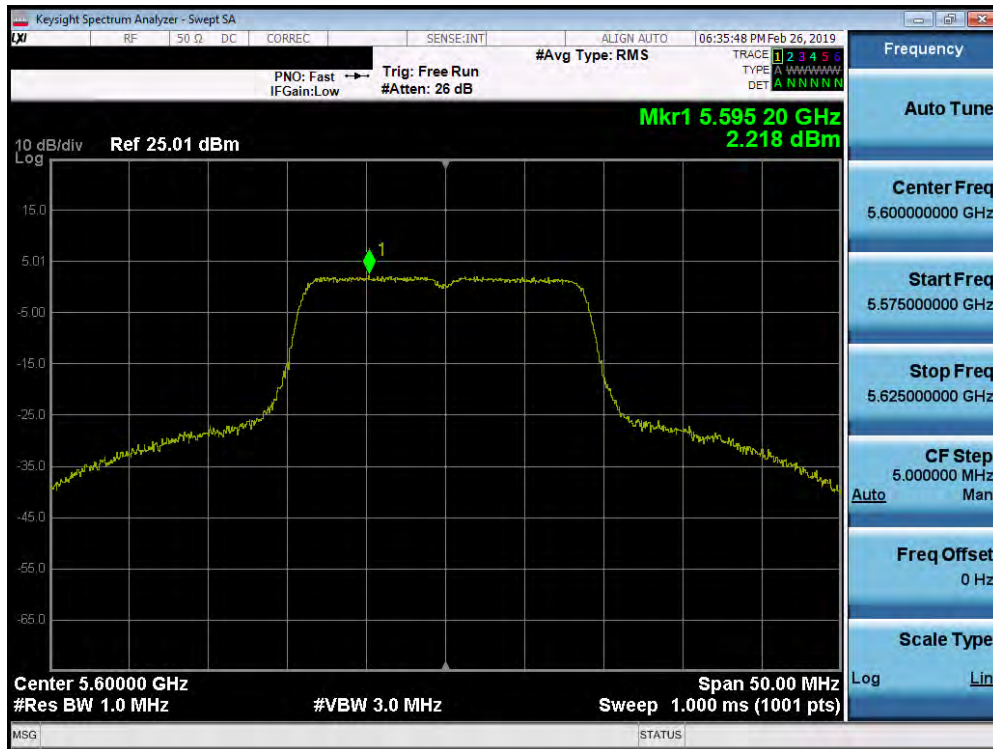


Plot 7-170. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)

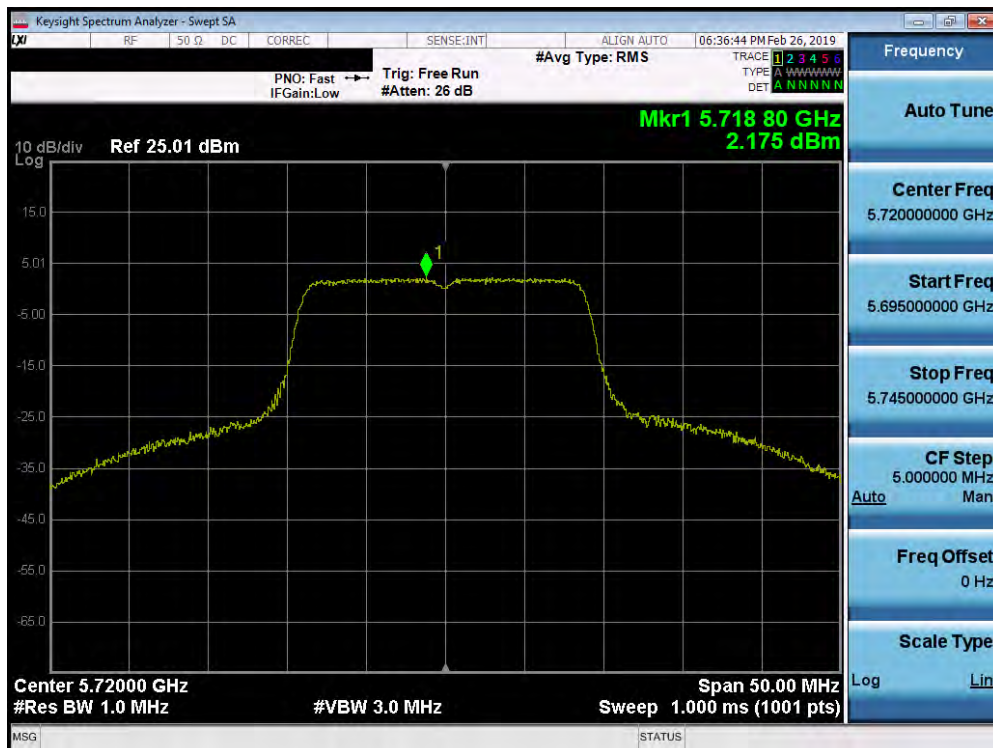

Plot 7-171. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 115 of 248

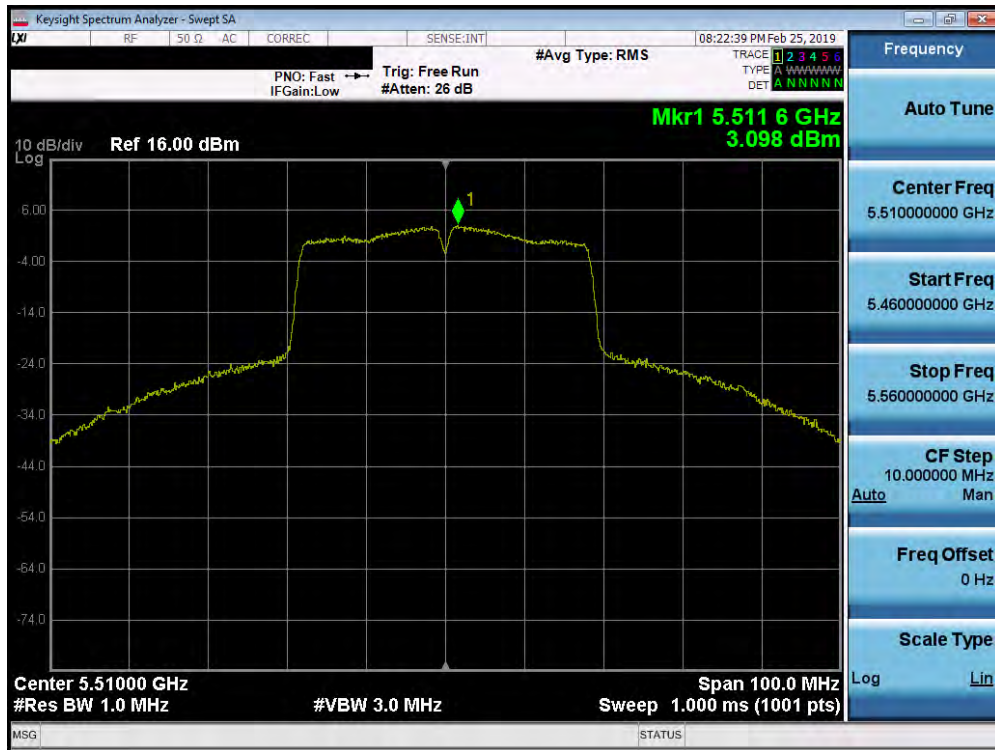


Plot 7-172. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)




Plot 7-173. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 116 of 248

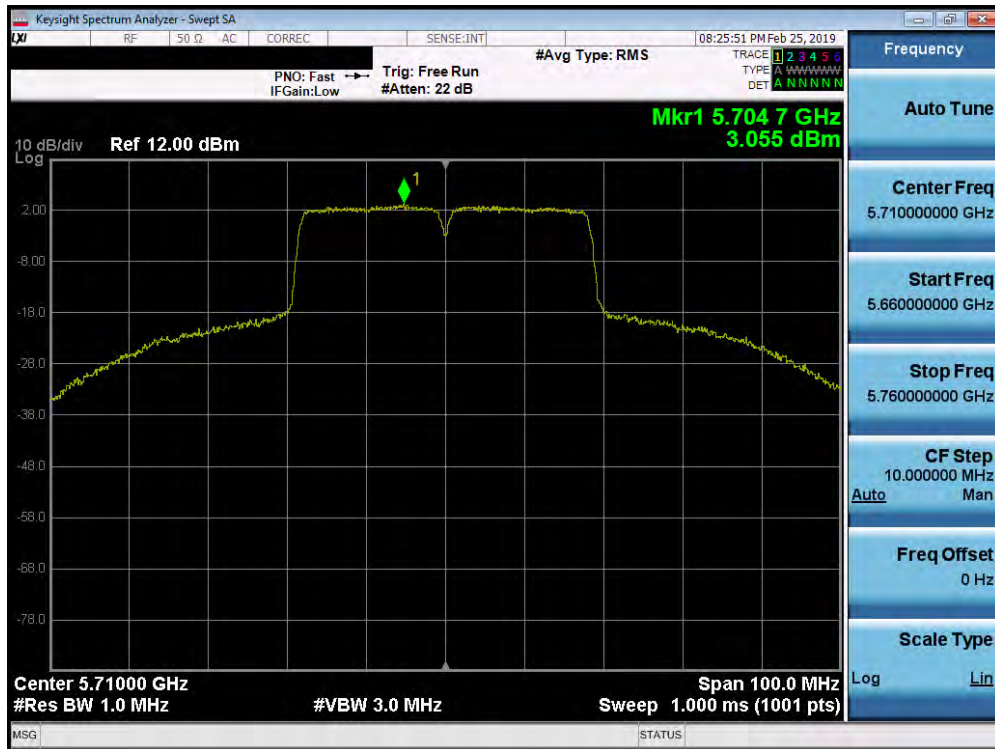


Plot 7-174. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

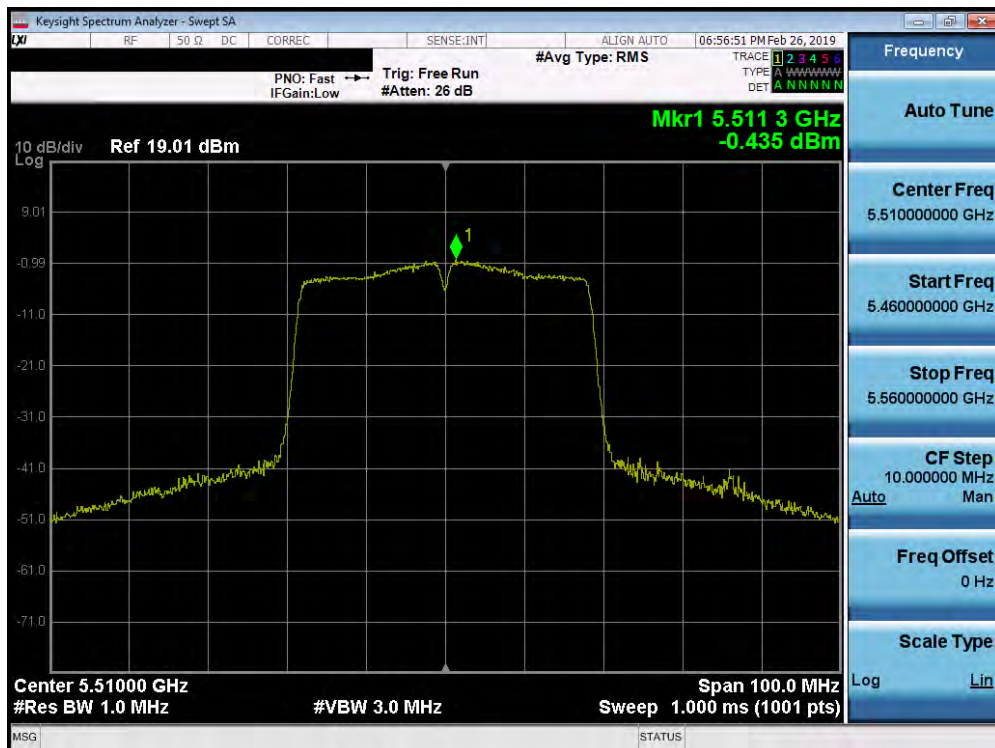


Plot 7-175. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 117 of 248

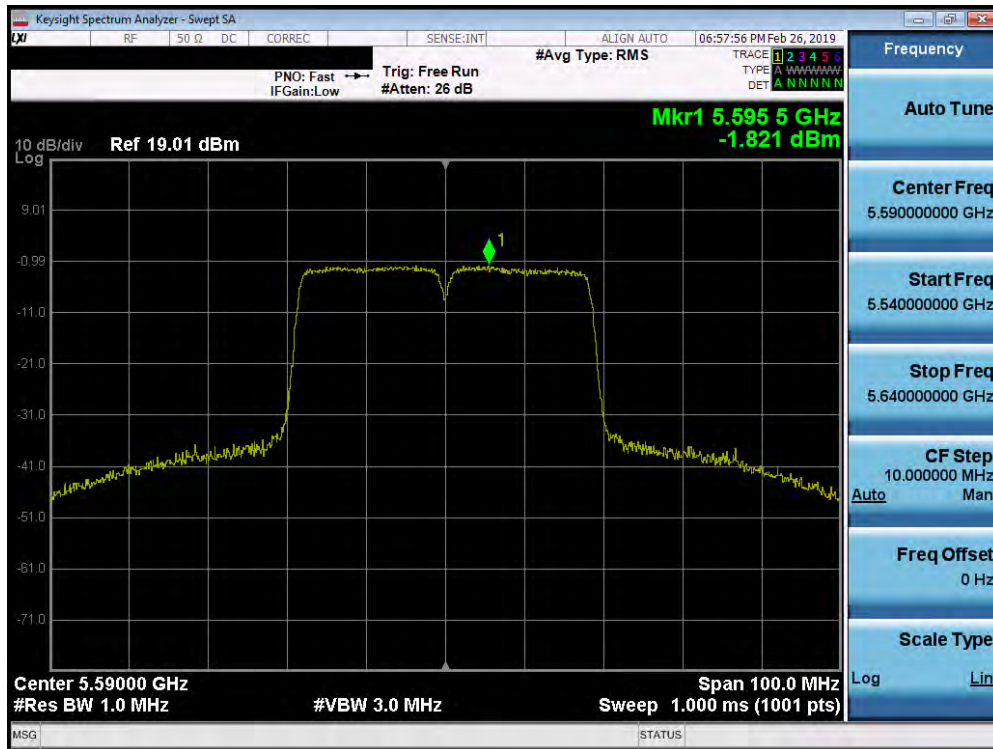


Plot 7-176. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 118)

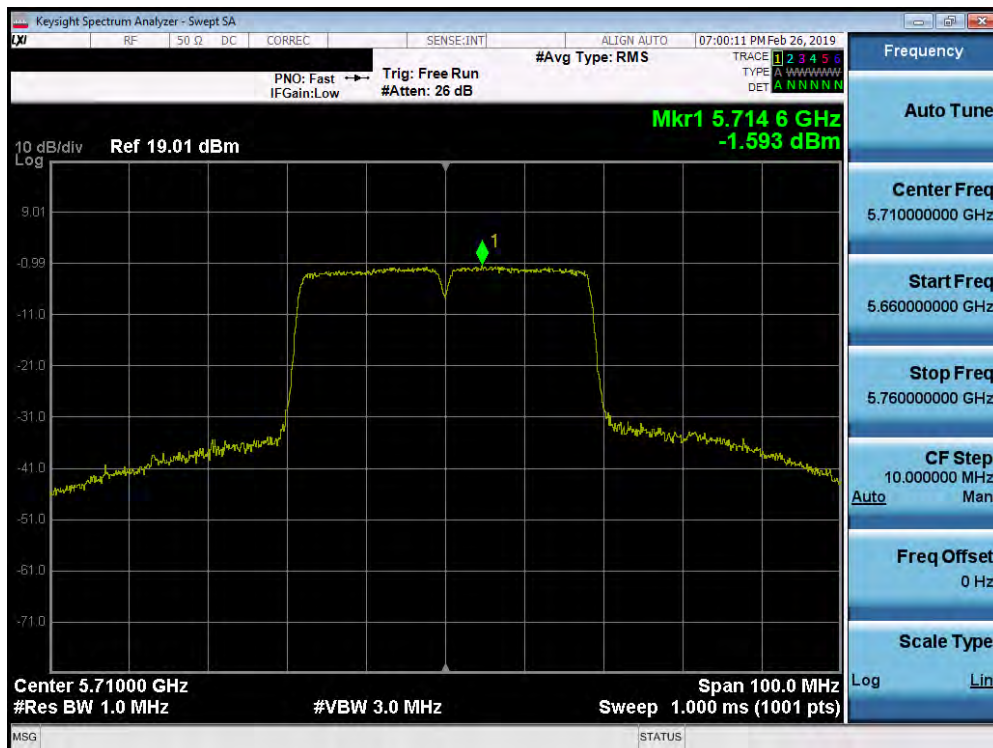


Plot 7-177. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 118 of 248

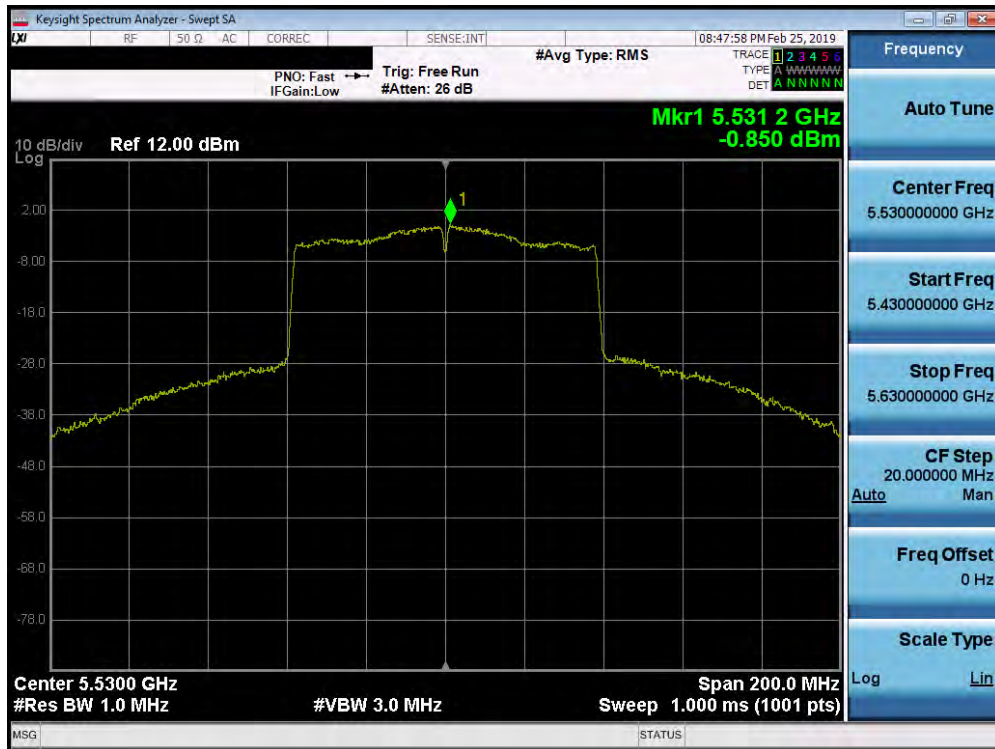

Plot 7-178. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

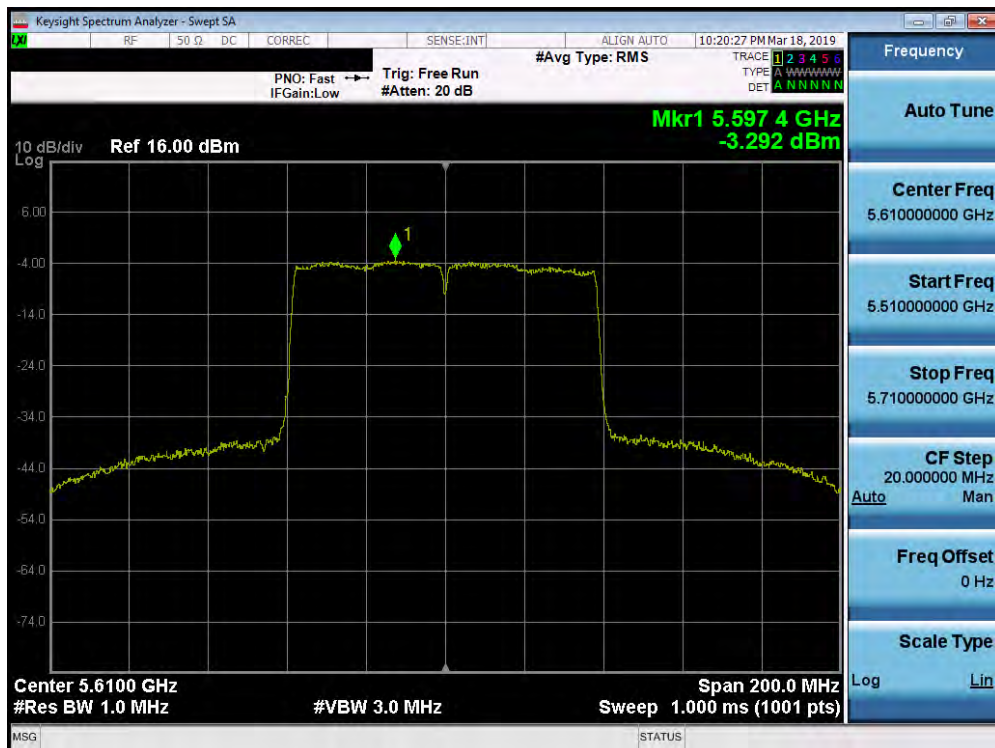


Plot 7-179. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07-A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 119 of 248




Plot 7-180. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

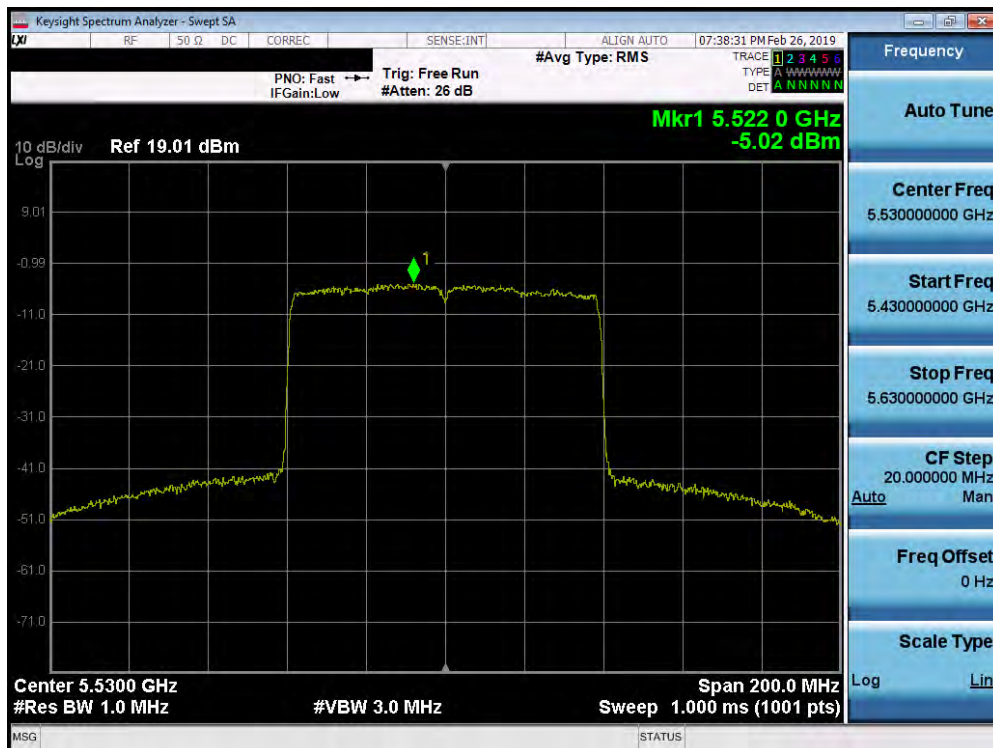


Plot 7-181. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 120 of 248

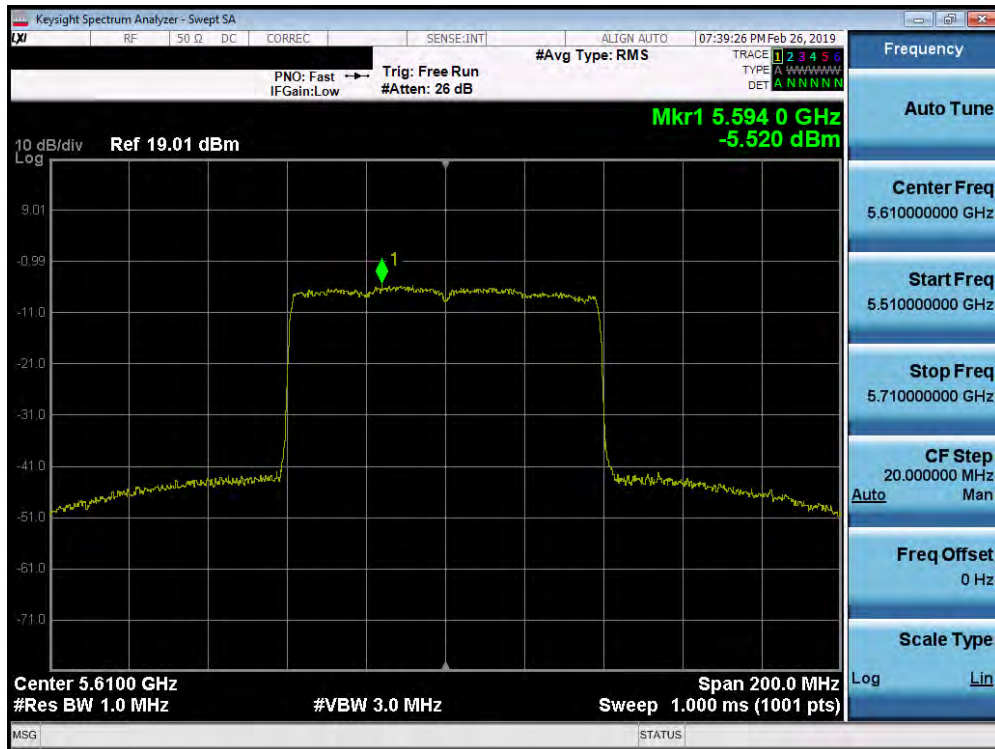

Plot 7-182. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

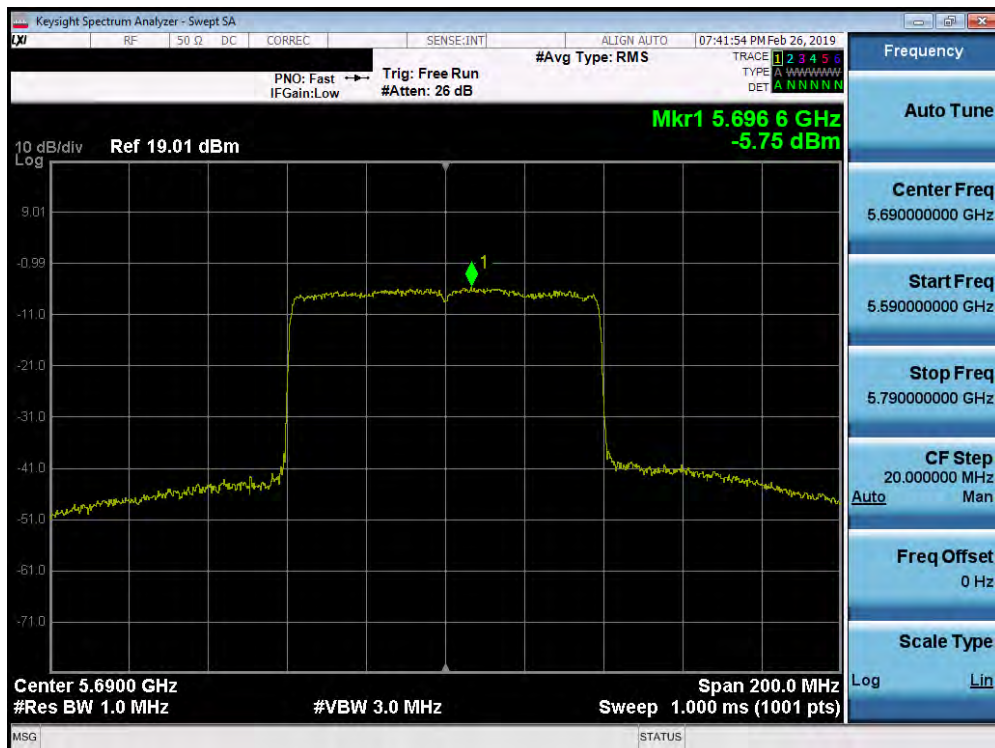


Plot 7-183. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 121 of 248


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	3.80	30.0	-26.20
	5785	157	a	6	4.39	30.0	-25.61
	5825	165	a	6	2.57	30.0	-27.43
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.52	30.0	-26.49
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.85	30.0	-26.15
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.71	30.0	-26.29
	5745	149	ax (20MHz)	8.6 (MCS0)	3.06	30.0	-26.94
	5785	157	ax (20MHz)	8.6 (MCS0)	3.60	30.0	-26.40
	5825	165	ax (20MHz)	8.6 (MCS0)	3.23	30.0	-26.77
	5755	151	n (40MHz)	13.5/15 (MCS0)	3.38	30.0	-26.62
	5795	159	n (40MHz)	13.5/15 (MCS0)	3.64	30.0	-26.37
	5755	151	ax (40MHz)	17.2 (MCS0)	-1.35	30.0	-31.35
	5795	159	ax (40MHz)	17.2 (MCS0)	-1.39	30.0	-31.39
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-1.50	30.0	-31.50
	5775	155	ax (80MHz)	36 (MCS0)	-4.83	30.0	-34.83

Table 7-23. Band 3 Conducted Power Spectral Density Measurements SISO ANT1

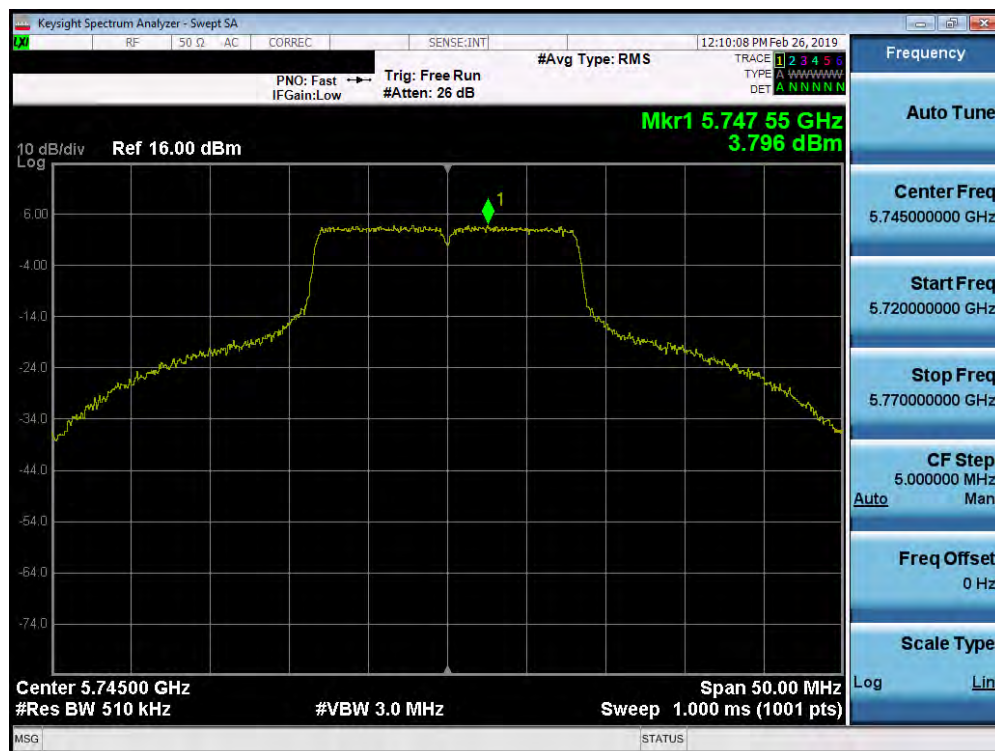


Plot 7-184. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 122 of 248

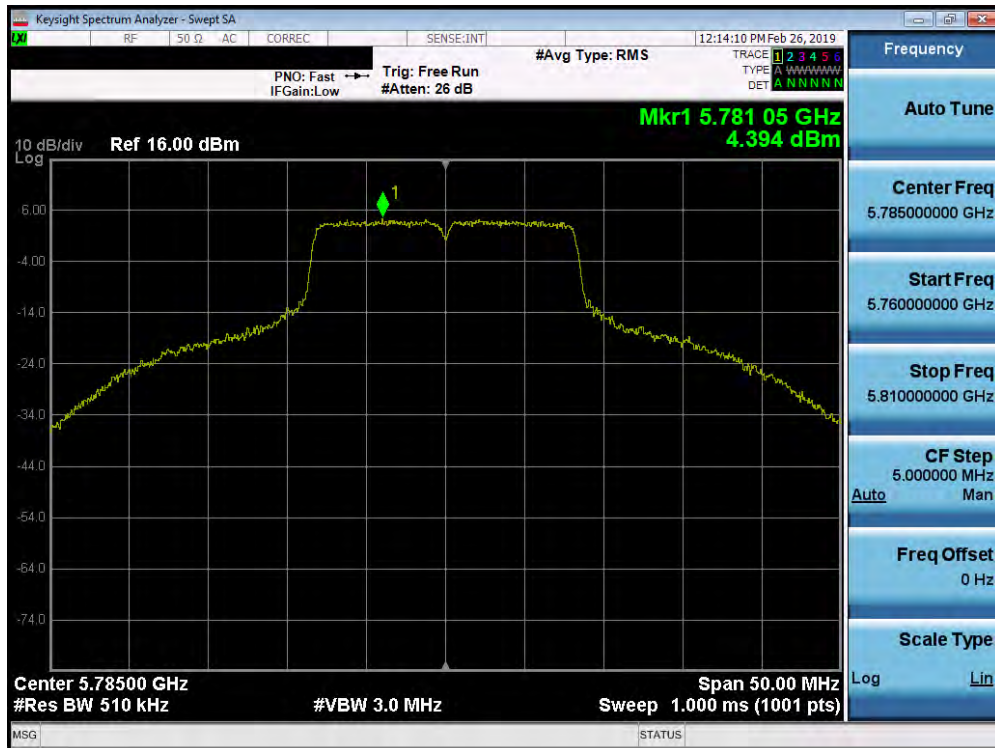


Plot 7-185. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 157)

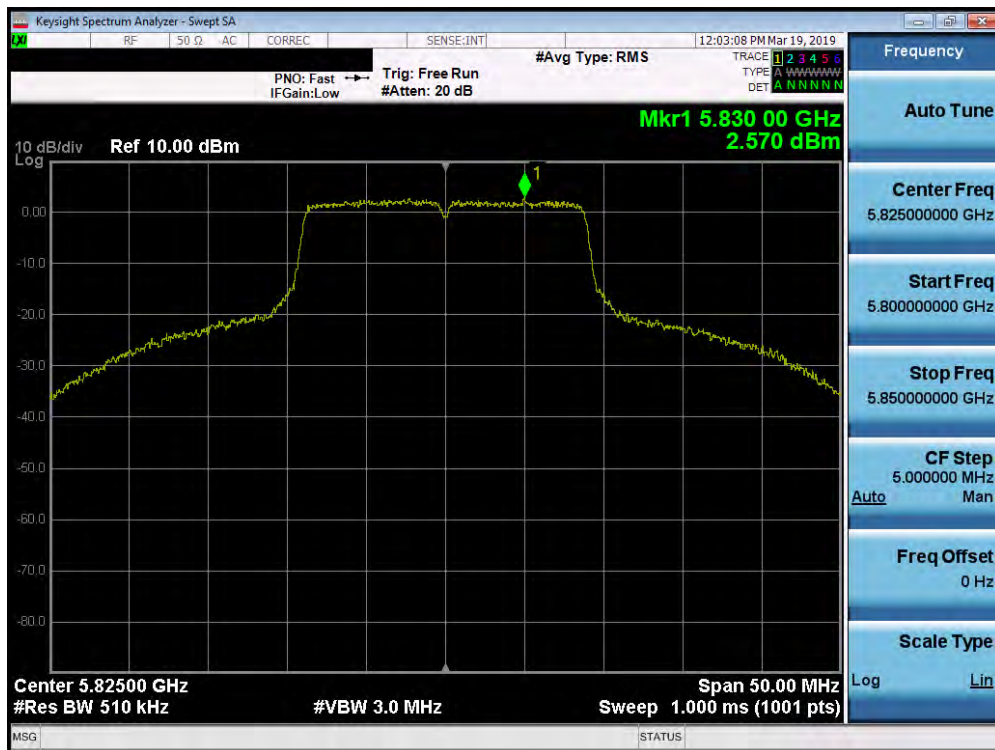


Plot 7-186. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 123 of 248

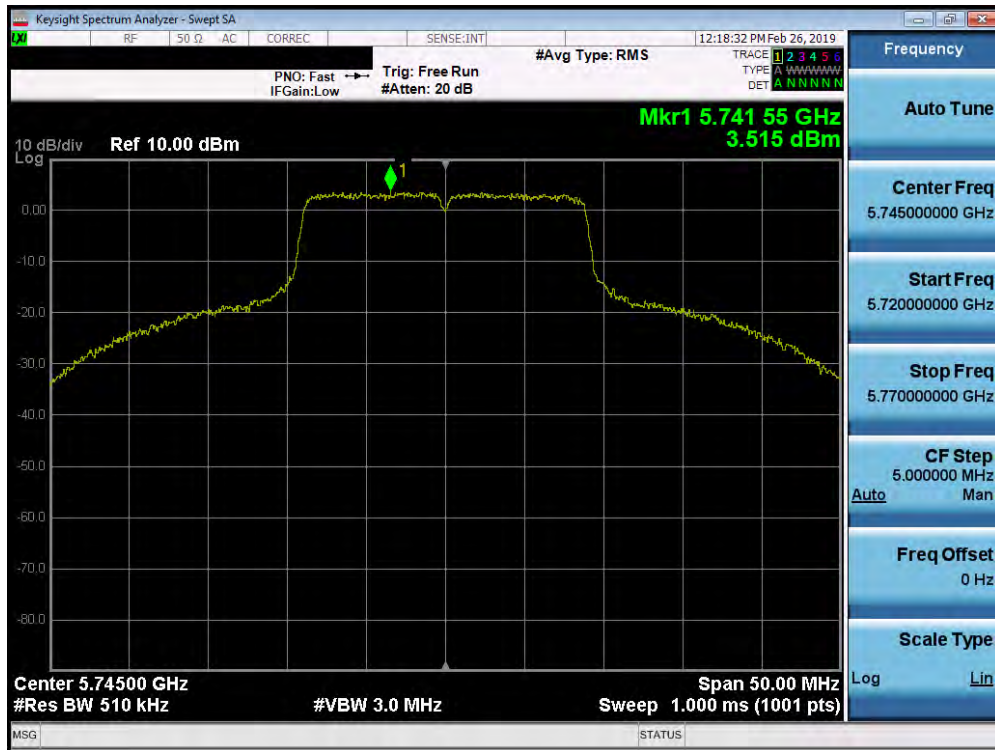


Plot 7-187. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

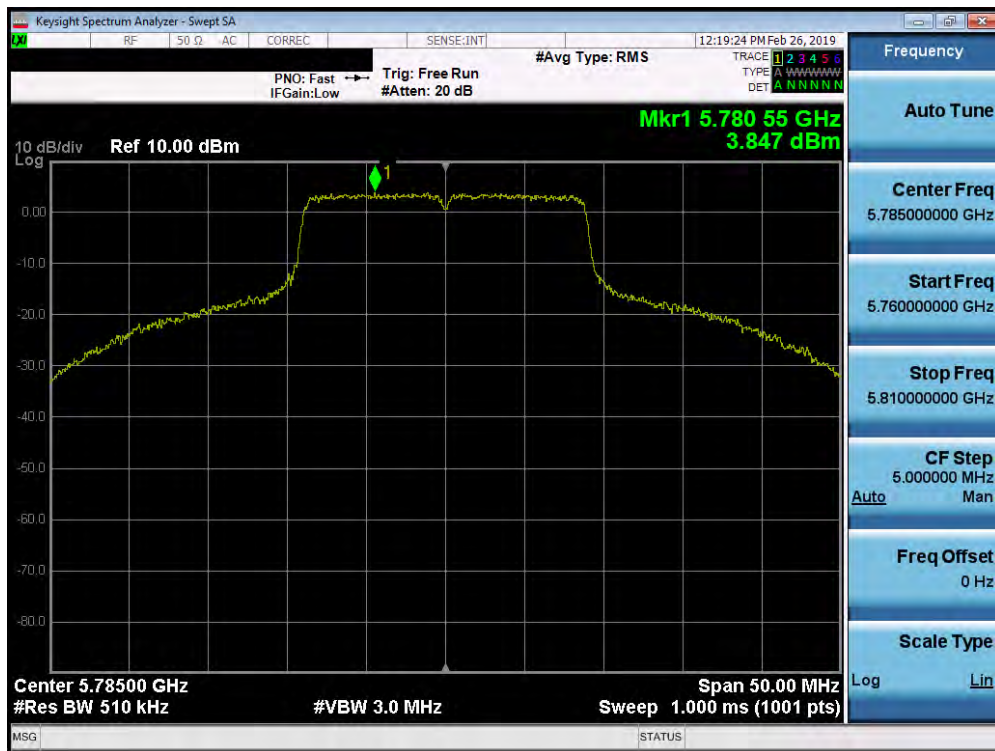


Plot 7-188. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 124 of 248

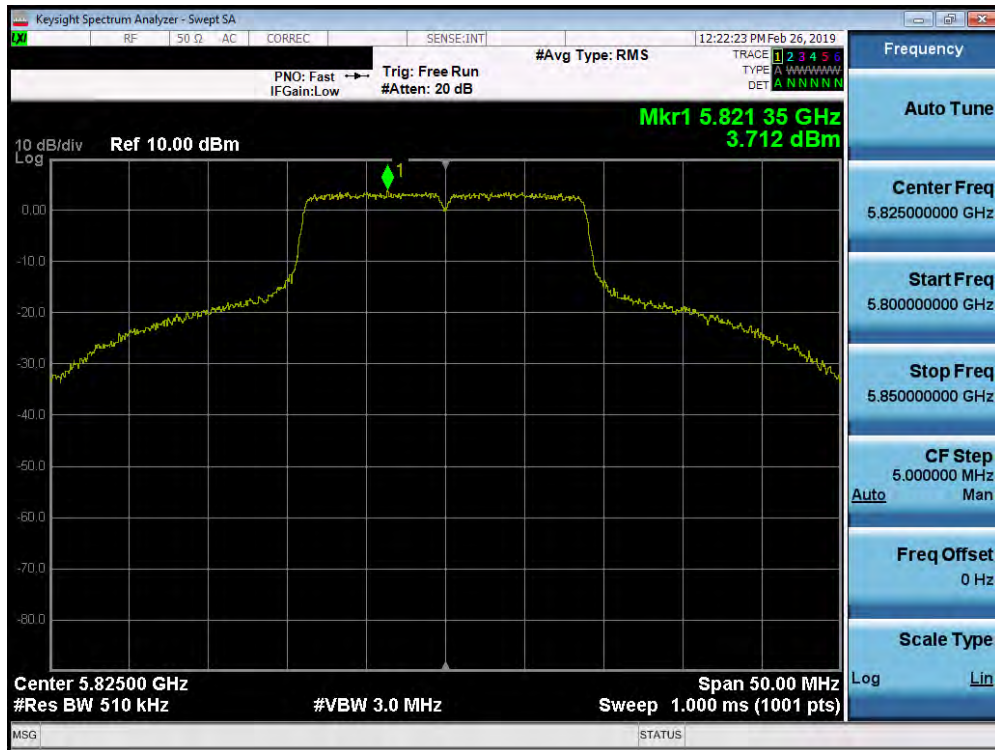


Plot 7-189. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

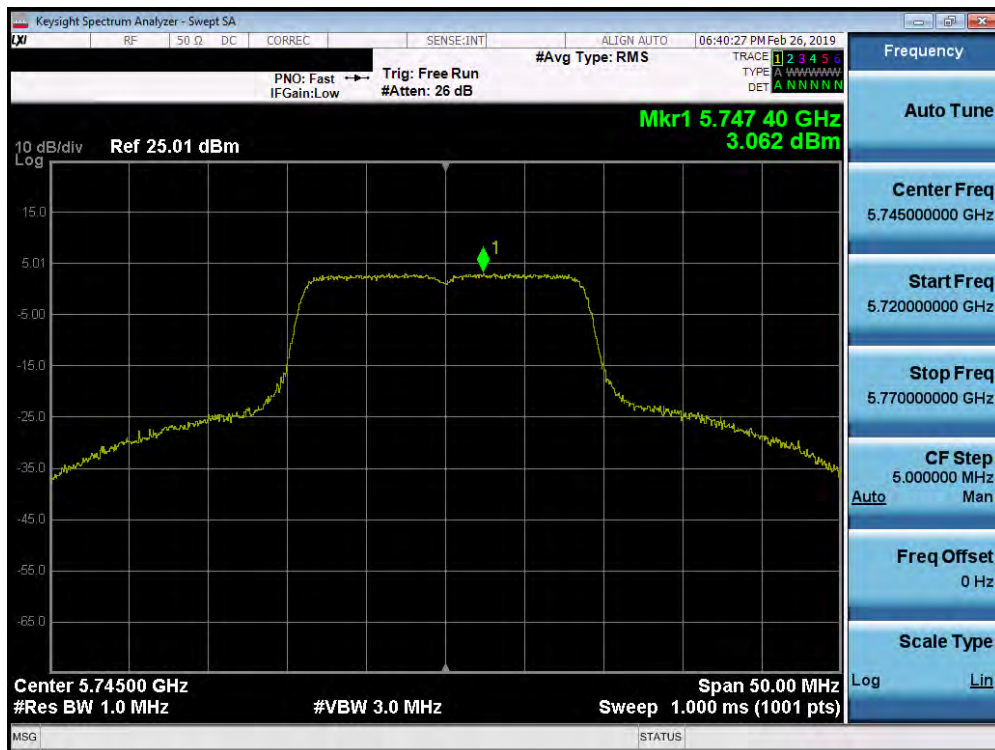


Plot 7-190. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 125 of 248

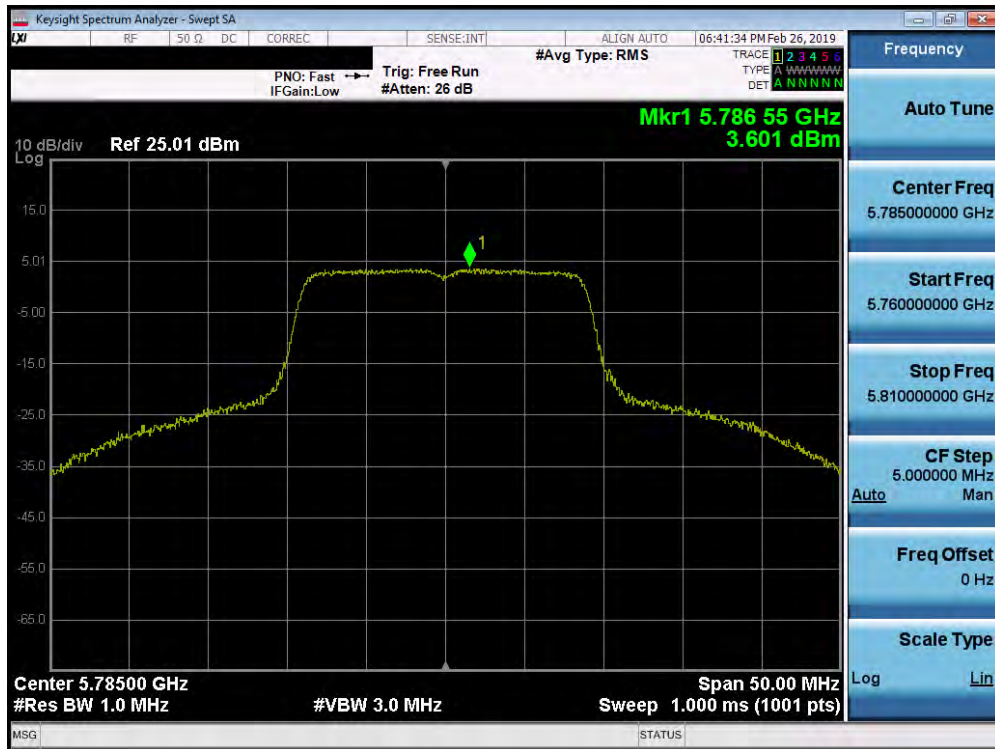


Plot 7-191. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

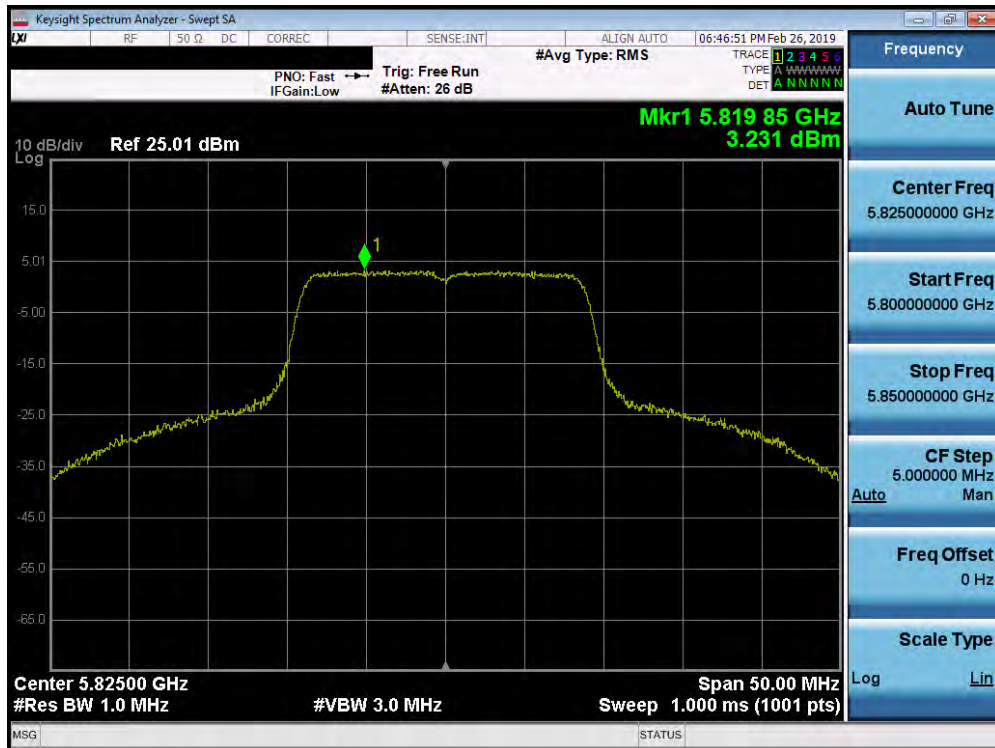


Plot 7-192. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 126 of 248

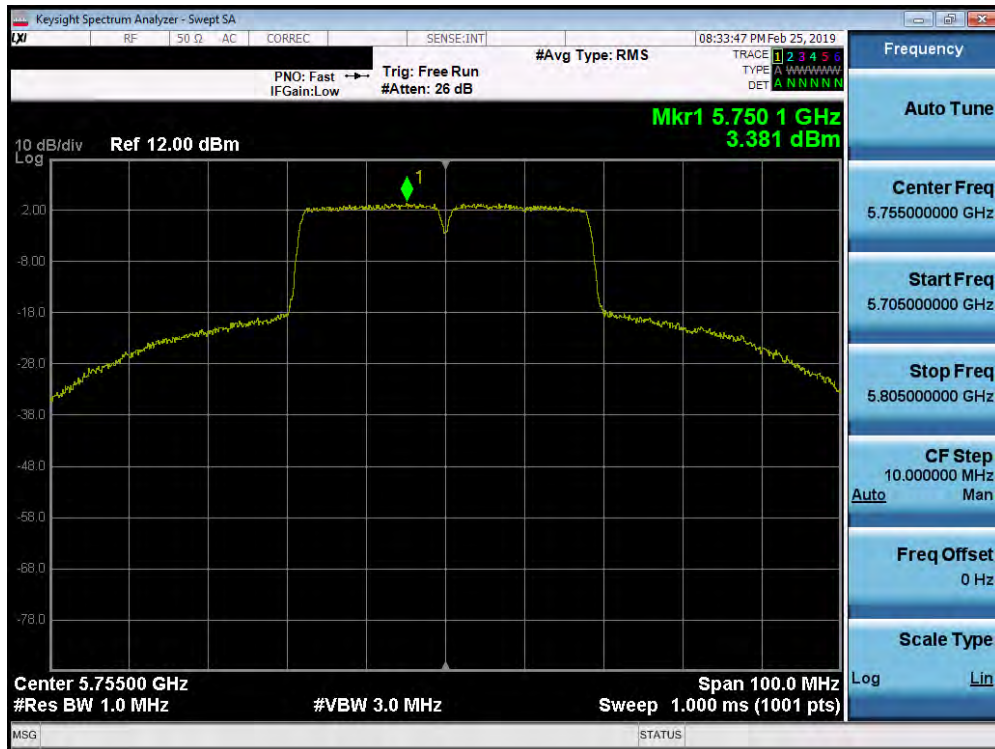


Plot 7-193. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

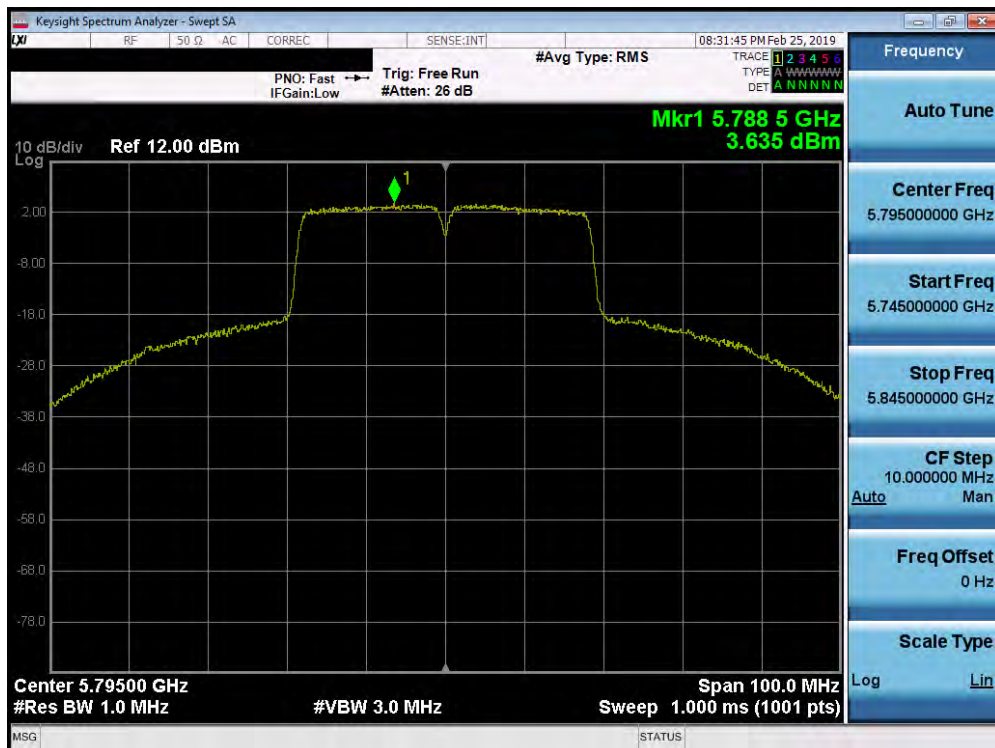


Plot 7-194. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 127 of 248

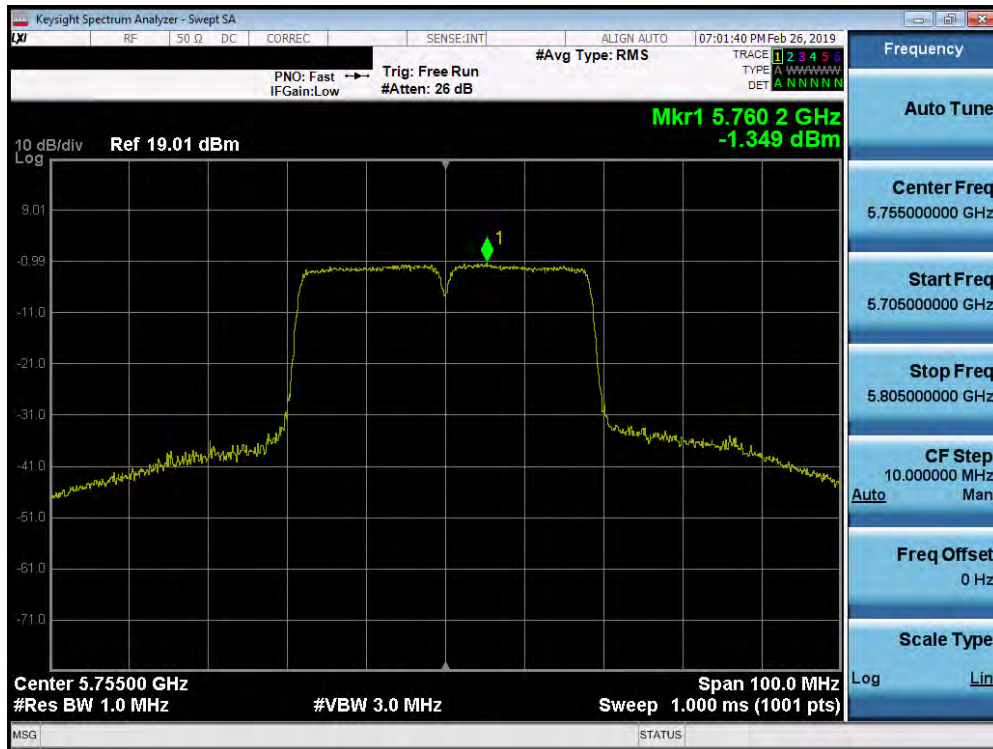


Plot 7-195. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

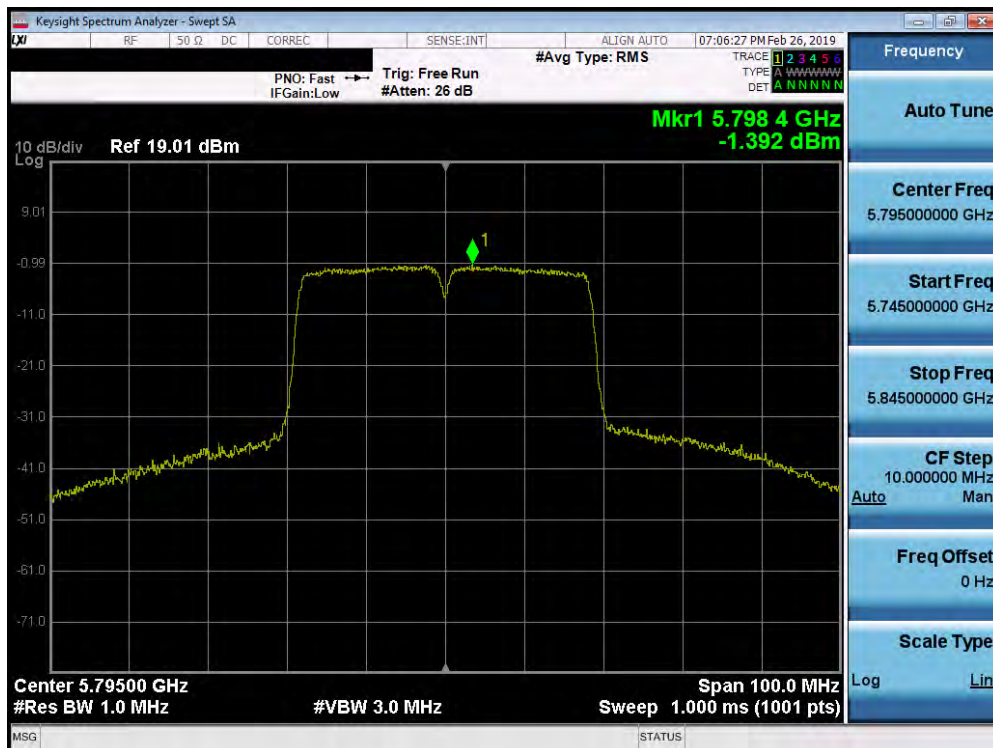


Plot 7-196. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 128 of 248

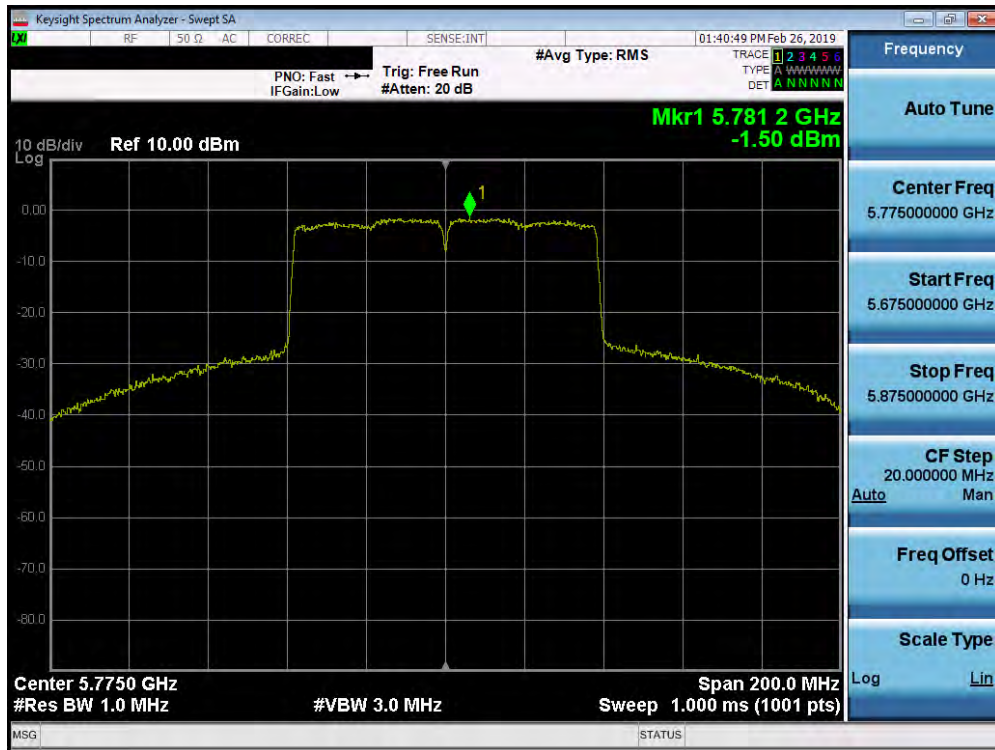

Plot 7-197. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

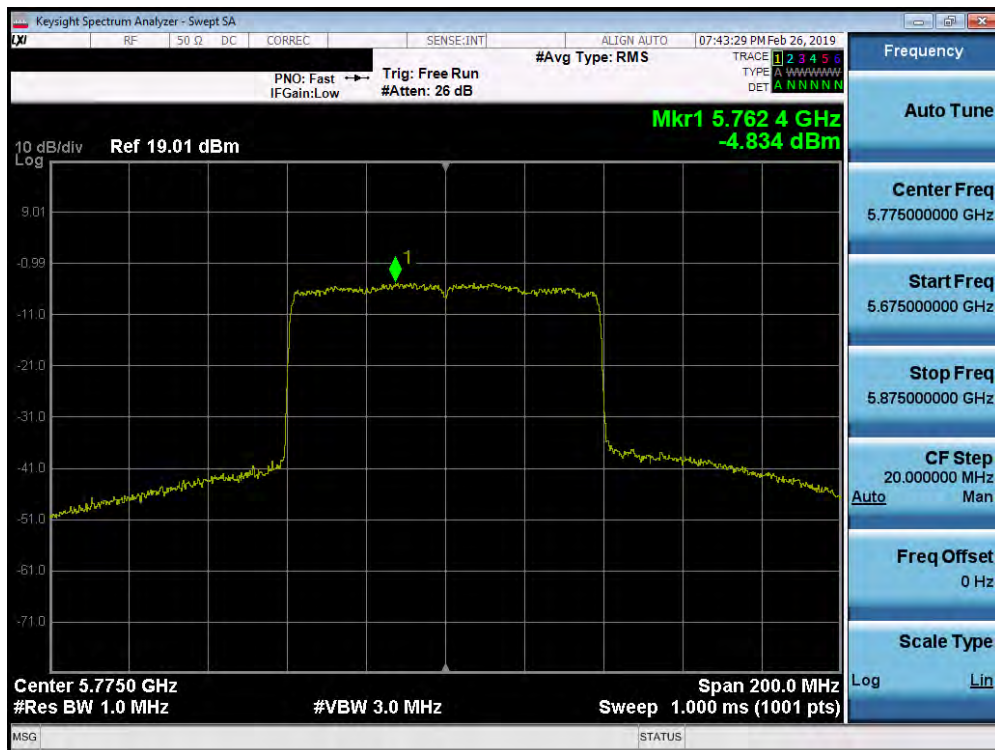

Plot 7-198. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 129 of 248

SISO Antenna-2 Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	7.84	11.0	-3.16
	5200	40	a	6	6.94	11.0	-4.06
	5240	48	a	6	7.02	11.0	-3.98
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	7.57	11.0	-3.43
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.26	11.0	-4.74
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.53	11.0	-4.47
	5180	36	ax (20MHz)	8.6 (MCS0)	3.97	11.0	-7.03
	5200	40	ax (20MHz)	8.6 (MCS0)	3.93	11.0	-7.07
	5240	48	ax (20MHz)	8.6 (MCS0)	4.14	11.0	-6.86
	5190	38	n (40MHz)	13.5/15 (MCS0)	1.10	11.0	-9.91
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.75	11.0	-8.25
	5190	38	ax (40MHz)	17.2 (MCS0)	-0.61	11.0	-11.61
	5230	46	ax (40MHz)	17.2 (MCS0)	-1.28	11.0	-12.28
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-2.97	11.0	-13.97
Band 2A	5210	42	ax (80MHz)	36 (MCS0)	-4.90	11.0	-15.90
	5260	52	a	6	6.47	11.0	-4.54
	5280	56	a	6	6.69	11.0	-4.31
	5320	64	a	6	7.54	11.0	-3.46
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.43	11.0	-4.57
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.37	11.0	-4.63
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	7.38	11.0	-3.62
	5260	52	ax (20MHz)	8.6 (MCS0)	3.88	11.0	-7.12
	5280	56	ax (20MHz)	8.6 (MCS0)	3.70	11.0	-7.30
	5320	64	ax (20MHz)	8.6 (MCS0)	3.99	11.0	-7.01
	5270	54	n (40MHz)	13.5/15 (MCS0)	2.49	11.0	-8.51
	5310	62	n (40MHz)	13.5/15 (MCS0)	3.62	11.0	-7.38
	5270	54	ax (40MHz)	17.2 (MCS0)	-1.26	11.0	-12.26
	5310	62	ax (40MHz)	17.2 (MCS0)	-1.61	11.0	-12.61
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.27	11.0	-14.27
	5210	58	ax (80MHz)	36 (MCS0)	-4.87	11.0	-15.87
	5500	100	a	6	7.66	11.0	-3.34
	5600	120	a	6	6.64	11.0	-4.36
	5720	144	a	6	6.93	11.0	-4.07
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	7.52	11.0	-3.48
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	6.09	11.0	-4.91
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	6.58	11.0	-4.42
	5500	100	ax (20MHz)	8.6 (MCS0)	3.80	11.0	-7.20
	5600	120	ax (20MHz)	8.6 (MCS0)	3.89	11.0	-7.11
	5720	144	ax (20MHz)	8.6 (MCS0)	4.31	11.0	-6.69
	5510	102	n (40MHz)	13.5/15 (MCS0)	3.72	11.0	-7.28
	5590	118	n (40MHz)	13.5/15 (MCS0)	2.70	11.0	-8.30
	5710	142	n (40MHz)	13.5/15 (MCS0)	3.02	11.0	-7.98
	5510	102	ax (40MHz)	17.2 (MCS0)	-0.90	11.0	-11.90
	5590	118	ax (40MHz)	17.2 (MCS0)	-3.59	11.0	-14.59
	5710	142	ax (40MHz)	17.2 (MCS0)	-3.50	11.0	-14.50
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-2.09	11.0	-13.09
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-3.20	11.0	-14.20
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-3.17	11.0	-14.17
	5530	106	ax (80MHz)	36 (MCS0)	-6.19	11.0	-17.19
	5610	122	ax (80MHz)	36 (MCS0)	-8.67	11.0	-19.67
	5690	138	ax (80MHz)	36 (MCS0)	-7.23	11.0	-18.23

Table 7-24. Conducted Power Spectral Density Measurements SISO ANT2

FCC ID: A3LSMF900F			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 130 of 248	

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	7.84	-6.05	1.79	10.0	-8.21
	5200	40	a	6	6.94	-6.05	0.89	10.0	-9.11
	5240	48	a	6	7.02	-6.05	0.97	10.0	-9.03
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	7.57	-6.05	1.52	10.0	-8.48
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.26	-6.05	0.21	10.0	-9.79
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.53	-6.05	0.48	10.0	-9.52
	5190	38	n (40MHz)	13.5/15 (MCS0)	1.10	-6.05	-4.95	10.0	-14.95
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.75	-6.05	-3.30	10.0	-13.30
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-2.97	-6.05	-9.02	10.0	-19.02

Table 7-25. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED) SISO ANT2

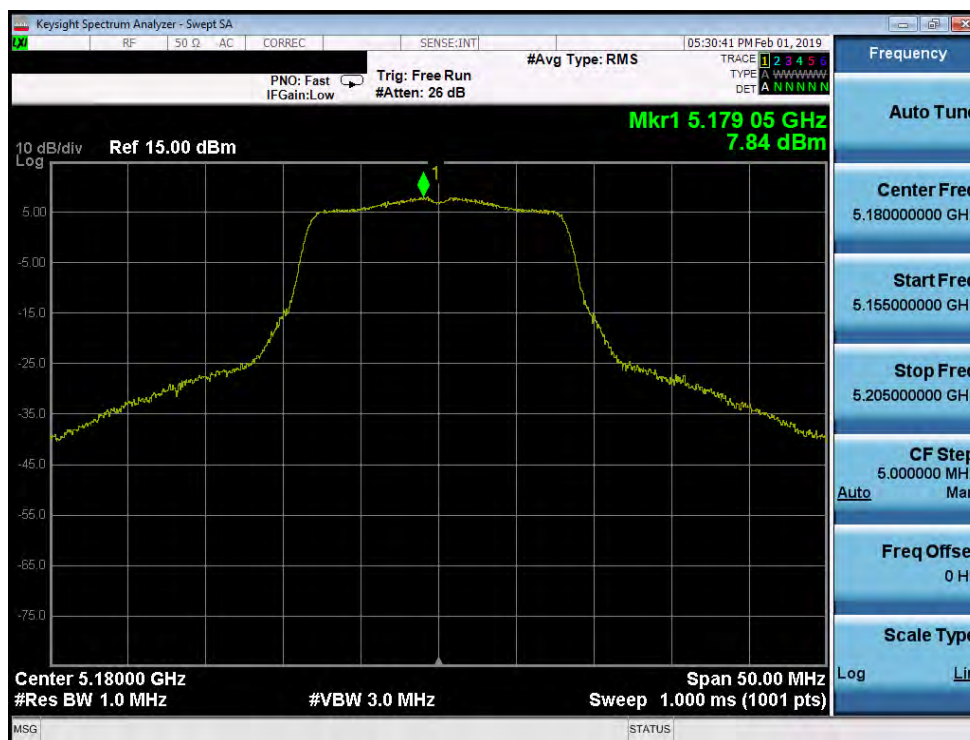

Plot 7-199. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 36)

FCC ID: A3LSMF900F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901280020-07.A3L	Test Dates: 01/22-03/18/2019	EUT Type: Portable Handset		Page 131 of 248