



MEASUREMENT REPORT LTE

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

6/24 - 7/8/2019

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1907090111-03.A3L

FCC ID:

A3LSMF900U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Class II Permissive Change

Model:

SM-F900U

Additional Model(s):

SM-F900U1, SM-F9000, SM-F900D, SCV44

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

Class II Permissive Change:

Please see FCC change document

Original Grant Date:

April 5, 2019

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 1 of 25

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Block C Frequency Range	6
3.3	BRS/EBS Frequency Block	6
3.4	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Radiated Power (ERP/EIRP).....	12
7.3	Radiated Spurious Emissions Measurements	16
7.4	Uplink Carrier Aggregation Radiated Measurements	22
8.0	CONCLUSION.....	25

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 2 of 25	



MEASUREMENT REPORT

FCC Part 27



Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Modulation
			Max. Power (W)	Max. Power (dBm)	
LTE Band 38	27	2572.5 - 2617.5	0.222	23.46	QPSK
LTE Band 38	27	2572.5 - 2617.5	0.198	22.97	16QAM
LTE Band 38	27	2572.5 - 2617.5	0.151	21.78	64QAM
LTE Band 38	27	2575 - 2615	0.216	23.35	QPSK
LTE Band 38	27	2575 - 2615	0.200	23.00	16QAM
LTE Band 38	27	2575 - 2615	0.150	21.77	64QAM
LTE Band 38	27	2577.5 - 2612.5	0.230	23.61	QPSK
LTE Band 38	27	2577.5 - 2612.5	0.168	22.26	16QAM
LTE Band 38	27	2577.5 - 2612.5	0.163	22.12	64QAM
LTE Band 38	27	2580 - 2610	0.293	24.66	QPSK
LTE Band 38	27	2580 - 2610	0.270	24.31	16QAM
LTE Band 38	27	2580 - 2610	0.196	22.92	64QAM
LTE Band 41 (PC3)	27	2498.5 - 2687.5	0.214	23.30	QPSK
LTE Band 41 (PC3)	27	2498.5 - 2687.5	0.178	22.51	16QAM
LTE Band 41 (PC3)	27	2498.5 - 2687.5	0.128	21.07	64QAM
LTE Band 41 (PC3)	27	2501 - 2685	0.161	22.08	QPSK
LTE Band 41 (PC3)	27	2501 - 2685	0.141	21.51	16QAM
LTE Band 41 (PC3)	27	2501 - 2685	0.118	20.73	64QAM
LTE Band 41 (PC3)	27	2503.5 - 2682.5	0.152	21.82	QPSK
LTE Band 41 (PC3)	27	2503.5 - 2682.5	0.113	20.51	16QAM
LTE Band 41 (PC3)	27	2503.5 - 2682.5	0.098	19.91	64QAM
LTE Band 41 (PC3)	27	2506 - 2680	0.231	23.63	QPSK
LTE Band 41 (PC3)	27	2506 - 2680	0.208	23.18	16QAM
LTE Band 41 (PC3)	27	2506 - 2680	0.152	21.83	64QAM

EUT Overview (High Bands)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 3 of 25	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 4 of 25

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF900U**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Test Device Serial No.: 0313S, 0314S, 0369S, 0370S, 0366S, 0368S, 0365S

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EVDO (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The EUT is capable of operating in folded closed and unfolded open configurations. The worst-case configuration for radiated emissions was determined from open and closed configurations in X, Y, and Z orientations for horizontal and vertical antenna polarizations. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 5 of 25

3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10 \log_{10}(\text{Power}_{\text{[Watts]}})$. For Band 41, the calculated P_d levels are compared to the absolute spurious emission limit of -25dBm which is equivalent to the required minimum attenuation of $55 + 10 \log_{10}(\text{Power}_{\text{[Watts]}})$. For Band 30, the calculated P_d levels are compared to the absolute spurious emission limit of -40dBm which is equivalent to the required minimum attenuation of $70 + 10 \log_{10}(\text{Power}_{\text{[Watts]}})$.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 7 of 25

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 8 of 25

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	9/17/2018	Annual	9/17/2019	441119
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	8/8/2018	Annual	8/8/2019	441128
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	6/7/2018	Triennial	6/7/2021	9203-2178
Emco	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	00135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	00128338
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/28/2018	Biennial	3/28/2020	128337
Huber + Suhner	Sucoflex 102A	40GHz Radiated Cable Set	8/23/2018	Annual	8/23/2019	251425001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			102060
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	9/19/2018	Annual	9/19/2019	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	4/30/2018	Biennial	4/30/2020	9105-2404
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 9 of 25	

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 10 of 25

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF900U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 41/38)	< 2 Watts max. EIRP	Radiated	Pass	Section 7.2
27.53(m)	Undesirable Emissions (Band 41/38)	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.3
27.53(m)	Uplink Carrier Aggregation	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.3

Table 7-1. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 11 of 25	

7.2 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 12 of 25

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

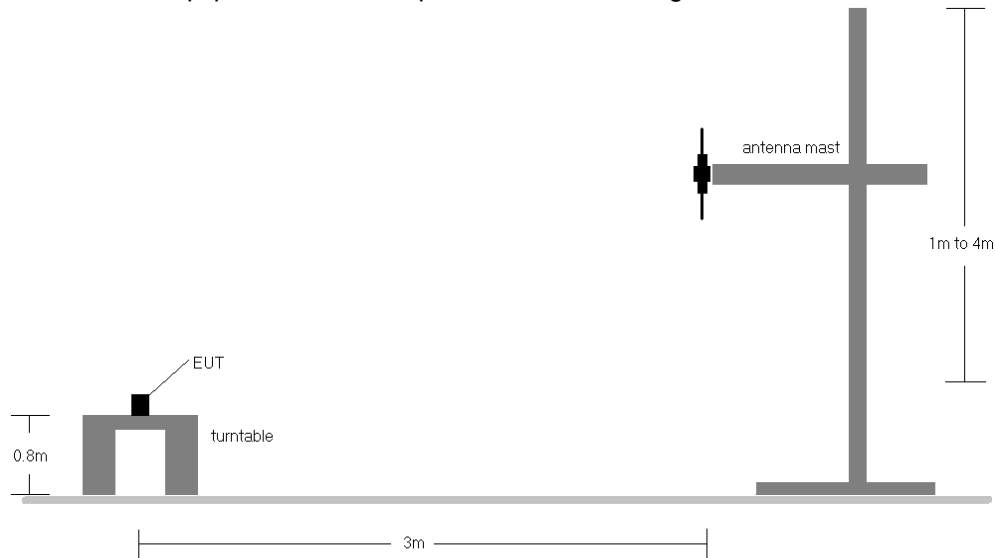


Figure 7-1. Radiated Test Setup <1GHz

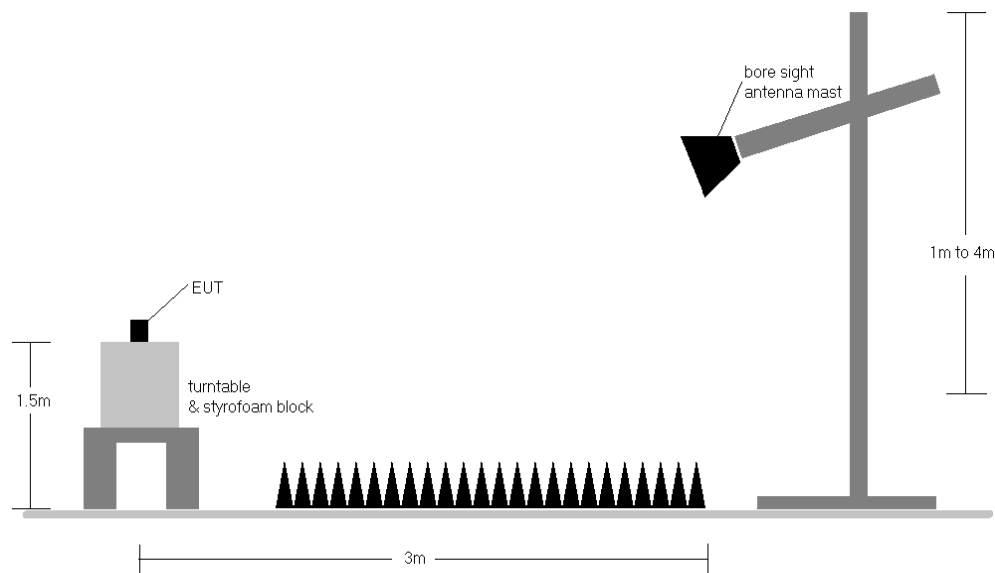


Figure 7-2. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 13 of 25

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	EUT Configuration	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2498.50	5	QPSK	Open	V	381	326	1 / 0	13.66	9.43	23.09	0.204	33.01	-9.92
2502.50	5	QPSK	Open	V	400	311	1 / 0	13.87	9.43	23.30	0.214	33.01	-9.71
2593.00	5	QPSK	Open	V	364	297	1 / 0	13.49	9.55	23.05	0.202	33.01	-9.96
2687.50	5	QPSK	Open	V	389	306	1 / 0	13.44	9.82	23.26	0.212	33.01	-9.75
2502.50	5	16-QAM	Open	V	400	311	1 / 0	13.08	9.43	22.51	0.178	33.01	-10.50
2502.50	5	64-QAM	Open	V	400	311	1 / 0	11.64	9.43	21.07	0.128	33.01	-11.94
2501.00	10	QPSK	Open	V	396	278	1 / 49	12.43	9.43	21.86	0.153	33.01	-11.15
2505.00	10	QPSK	Open	V	400	314	1 / 49	12.65	9.43	22.08	0.161	33.01	-10.93
2593.00	10	QPSK	Open	V	386	299	1 / 49	12.42	9.55	21.98	0.158	33.01	-11.03
2685.00	10	QPSK	Open	V	372	287	1 / 49	12.20	9.82	22.03	0.159	33.01	-10.98
2505.00	10	16-QAM	Open	V	400	314	1 / 49	12.08	9.43	21.51	0.141	33.01	-11.50
2505.00	10	64-QAM	Open	V	400	314	1 / 49	11.30	9.43	20.73	0.118	33.01	-12.28
2503.50	15	QPSK	Open	V	112	352	1 / 0	12.12	9.43	21.54	0.143	33.01	-11.47
2507.50	15	QPSK	Open	V	100	345	1 / 0	12.40	9.42	21.82	0.152	33.01	-11.19
2593.00	15	QPSK	Open	V	116	348	1 / 0	12.11	9.55	21.66	0.147	33.01	-11.35
2682.50	15	QPSK	Open	V	100	355	1 / 0	11.98	9.83	21.81	0.152	33.01	-11.20
2507.50	15	16-QAM	Open	V	100	345	1 / 0	11.09	9.42	20.51	0.113	33.01	-12.50
2507.50	15	64-QAM	Open	V	100	345	1 / 0	10.49	9.42	19.91	0.098	33.01	-13.10
2506.00	20	QPSK	Open	V	100	322	1 / 99	14.20	9.42	23.62	0.230	33.01	-9.39
2510.00	20	QPSK	Open	V	100	315	1 / 99	14.21	9.42	23.63	0.231	33.01	-9.38
2593.00	20	QPSK	Open	V	100	325	1 / 0	12.61	9.55	22.16	0.165	33.01	-10.85
2680.00	20	QPSK	Open	V	305	296	1 / 0	12.51	9.83	22.34	0.172	33.01	-10.67
2506.00	20	16-QAM	Open	V	100	322	1 / 99	13.76	9.42	23.18	0.208	33.01	-9.83
2510.00	20	64-QAM	Open	V	100	315	1 / 99	12.41	9.42	21.83	0.152	33.01	-11.18
2510.00	20	QPSK	Open	H	270	46	9.42	13.18	9.42	22.60	0.182	33.01	-10.41
2510.00	20	QPSK	Closed	H	222	46	9.42	12.13	9.42	21.55	0.143	33.01	-11.46

Table 7-2. EIRP Data (Band 41 – PC3)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 14 of 25	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	EUT Configuration	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2572.50	5	QPSK	Open	V	321	249	1 / 24	13.73	9.43	23.16	0.207	33.01	-9.85
2595.00	5	QPSK	Open	V	289	251	1 / 24	13.87	9.55	23.43	0.220	33.01	-9.58
2617.50	5	QPSK	Open	V	315	253	1 / 24	13.64	9.82	23.46	0.222	33.01	-9.55
2617.50	5	16-QAM	Open	V	315	253	1 / 24	13.15	9.82	22.97	0.198	33.01	-10.04
2617.50	5	64-QAM	Open	V	315	253	1 / 24	11.96	9.82	21.78	0.151	33.01	-11.23
2575.00	10	QPSK	Open	V	314	248	1 / 49	13.75	9.43	23.17	0.208	33.01	-9.84
2595.00	10	QPSK	Open	V	344	249	1 / 49	13.72	9.55	23.27	0.213	33.01	-9.74
2615.00	10	QPSK	Open	V	316	250	1 / 49	13.53	9.82	23.35	0.216	33.01	-9.66
2615.00	10	16-QAM	Open	V	316	250	1 / 49	13.18	9.82	23.00	0.200	33.01	-10.01
2615.00	10	64-QAM	Open	V	316	250	1 / 49	11.95	9.82	21.77	0.150	33.01	-11.24
2577.50	15	QPSK	Open	V	322	247	1 / 0	14.09	9.42	23.51	0.224	33.01	-9.50
2595.00	15	QPSK	Open	V	318	256	1 / 0	14.01	9.55	23.56	0.227	33.01	-9.45
2612.50	15	QPSK	Open	V	314	252	1 / 0	13.78	9.83	23.61	0.230	33.01	-9.40
2612.50	15	16-QAM	Open	V	314	252	1 / 0	12.43	9.83	22.26	0.168	33.01	-10.75
2612.50	15	64-QAM	Open	V	314	252	1 / 0	12.29	9.83	22.12	0.163	33.01	-10.89
2510.00	20	QPSK	Open	V	100	339	1 / 0	14.44	9.42	23.86	0.243	33.01	-9.15
2595.00	20	QPSK	Open	V	100	12	1 / 99	13.82	9.55	23.37	0.217	33.01	-9.64
2610.00	20	QPSK	Open	V	308	326	1 / 99	14.83	9.83	24.66	0.293	33.01	-8.35
2610.00	20	16-QAM	Open	V	308	326	1 / 99	14.48	9.83	24.31	0.270	33.01	-8.70
2610.00	20	64-QAM	Open	V	308	326	1 / 99	13.09	9.83	22.92	0.196	33.01	-10.09
2610.00	20	QPSK	Open	H	102	146	9.83	14.61	9.83	22.66	0.185	33.01	-10.35
2610.00	20	QPSK	Closed	H	102	146	9.83	13.58	9.83	23.41	0.219	33.01	-9.60

Table 7-3. EIRP Data (Band 38)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 15 of 25

7.3 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 16 of 25

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

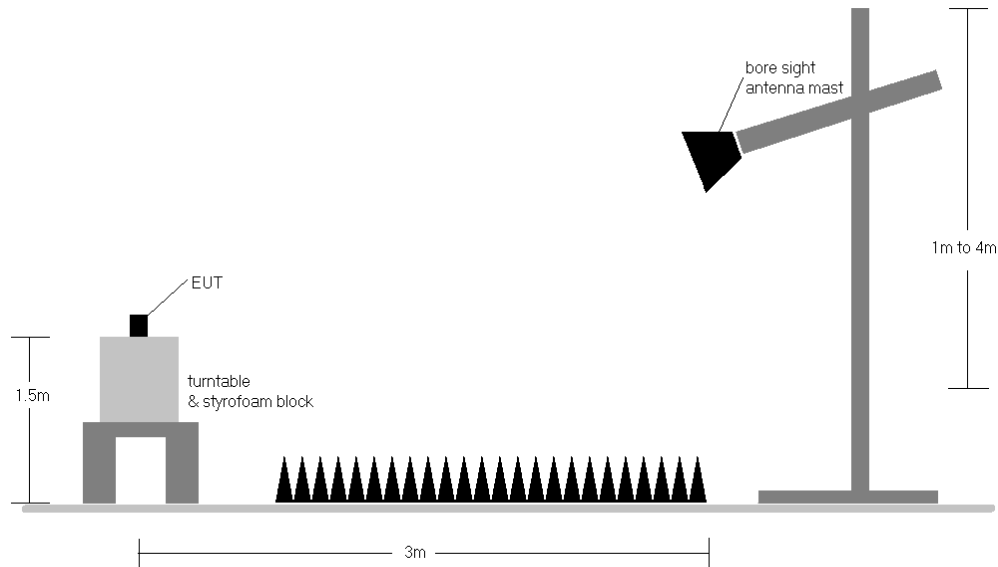


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 17 of 25

Band 41 PC3

OPERATING FREQUENCY: 2510.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5020.00	H	125	354	-64.03	8.56	-55.47	-30.5
7530.00	H	-	-	-54.06	8.46	-45.61	-20.6
10040.00	H	-	-	-59.11	9.85	-49.26	-24.3
12550.00	H	-	-	-54.84	9.06	-45.79	-20.8

Table 7-4. Radiated Spurious Data (Band 41 – Low Channel – OPEN)

OPERATING FREQUENCY: 2595.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5190.00	H	133	278	-62.27	8.70	-53.56	-28.6
7785.00	H	-	-	-62.01	8.69	-53.31	-28.3
10380.00	H	-	-	-56.96	9.62	-47.34	-22.3

Table 7-5. Radiated Spurious Data (Band 41 – Mid Channel – OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 18 of 25

OPERATING FREQUENCY: 2610.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5220.00	H	126	357	-64.13	8.71	-55.41	-30.4
7830.00	H	-	-	-52.73	8.74	-43.99	-19.0
10440.00	H	-	-	-52.99	9.59	-43.40	-18.4

Table 7-6. Radiated Spurious Data (Band 41 – High Channel – OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 19 of 25

Band 38

OPERATING FREQUENCY: 2580.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5160.00	H	166	54	-59.45	8.56	-50.89	-25.9
7670.00	H	188	42	-51.14	8.46	-42.69	-17.7
10180.00	H	-	-	-57.45	9.85	-47.60	-22.6

Table 7-7. Radiated Spurious Data (Band 38 – Low Channel – OPEN)

OPERATING FREQUENCY: 2595.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5190.00	H	120	344	-58.23	8.70	-49.53	-24.5
7785.00	H	245	297	-54.49	8.69	-45.80	-20.8
10380.00	H	-	-	-57.06	9.62	-47.44	-22.4

Table 7-8. Radiated Spurious Data (Band 38 – Mid Channel – OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 20 of 25

OPERATING FREQUENCY: 2610.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5220.00	H	141	247	-56.54	8.70	-47.84	-22.8
7830.00	H	212	44	-48.98	8.83	-40.15	-15.2
10440.00	H	-	-	-57.45	9.50	-47.96	-23.0

Table 7-9. Radiated Spurious Data (Band 38 – High Channel – OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 21 of 25

7.4 Uplink Carrier Aggregation Radiated Measurements

\$2.1053, \$27.53(m)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. No. of sweep points $\geq 2 \times$ span / RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. The trace was allowed to stabilize

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 22 of 25

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

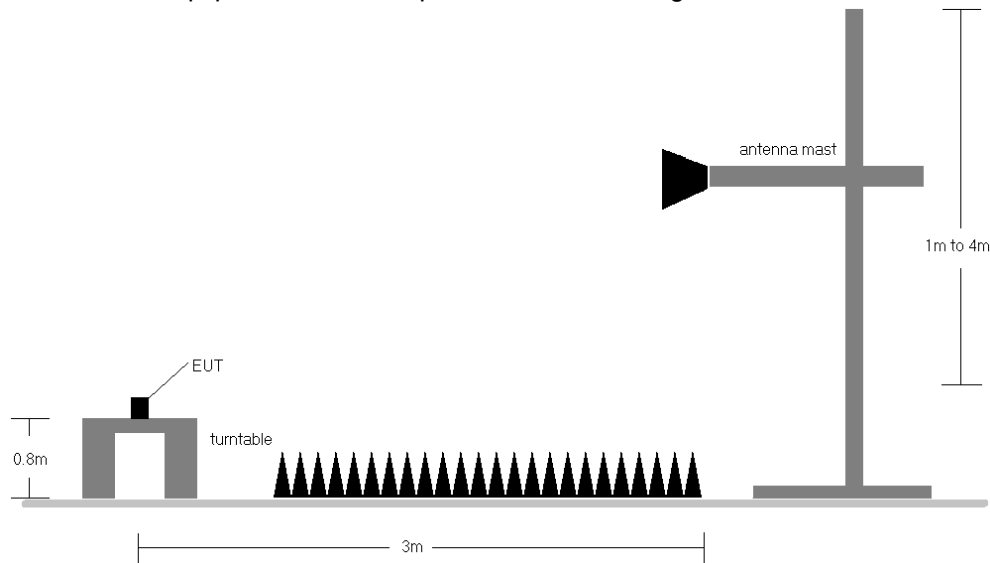


Figure 7-4. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) Radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) No significant emissions were found as a result of two uplink carriers operating contiguously.

FCC ID: A3LSMF900U	 ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 23 of 25

OPERATING FREQUENCY (PCC): 2577.50 MHz
 OPERATING FREQUENCY (SCC): 2592.50 MHz
 CHANNEL (PCC): 37825
 CHANNEL (SCC): 38150
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5155.00	H	-	-	-65.00	8.67	-56.33	-56.3
7732.50	H	-	-	-59.35	8.63	-50.72	-50.7

Table 7-7-10. Radiated Spurious Data (ULCA 38C PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Low Channel – Open)

OPERATING FREQUENCY (PCC): 2595.00 MHz
 OPERATING FREQUENCY (SCC): 2580.00 MHz
 CHANNEL (PCC): 38000
 CHANNEL (SCC): 37850
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5190.00	H	-	-	-65.44	8.70	-56.73	-56.7
7785.00	H	-	-	-59.60	8.69	-50.91	-50.9

Table 7-7-11. Radiated Spurious Data (ULCA 38C PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Mid Channel – Open)

OPERATING FREQUENCY (PCC): 2612.50 MHz
 OPERATING FREQUENCY (SCC): 2660.20 MHz
 CHANNEL (PCC): 38175
 CHANNEL (SCC): 41292
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5225.00	H	-	-	-64.98	8.70	-56.29	-56.3
7837.50	H	-	-	-59.80	8.95	-50.85	-50.8

Table 7-7-12. Radiated Spurious Data (ULCA 38C PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – High Channel – Open)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset	Page 24 of 25	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF900U** complies with all the requirements of Part 27 of the FCC Rules for LTE operation only.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1907090111-03.A3L	Test Dates: 6/24 - 7/8/2019	EUT Type: Portable Handset		Page 25 of 25