



MEASUREMENT REPORT

FCC Part 22 & 90

Applicant Name:

Samsung Electronics Co., Ltd.

129, Samsung-ro,

Yeongtong-gu, Suwon-si

Gyeonggi-do, 16677, Korea

Date of Testing:

01/22 - 03/29/2019

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1901160007-04.A3L

FCC ID:

A3LSMF900U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F900U

Additional Model:

SM-F900U1, SM-F9000, SM-F900D, SCV44

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:


§2.1049, §22(H), §90(R), §90(S)

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 1 of 66	

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	25
7.4	Band Edge Emissions at Antenna Terminal	37
7.5	Conducted Power Output Data	47
7.6	Radiated Power (ERP)	49
7.7	Radiated Spurious Emissions Measurements	52
7.8	Frequency Stability / Temperature Variation	59
8.0	CONCLUSION.....	66

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 2 of 66	



MEASUREMENT REPORT

FCC Part 22(H) & 90



Mode	Tx Frequency (MHz)	Measurement	Max. Power (W)	Max. Power (dBm)	Emission Designator	Modulation
LTE Band 14	790.5 - 795.5	ERP	0.180	22.56	4M54G7D	QPSK
LTE Band 14	790.5 - 795.5	ERP	0.152	21.82	4M52W7D	16-QAM
LTE Band 14	790.5 - 795.5	ERP	0.121	20.81	4M54W7D	64-QAM
LTE Band 14	793	ERP	0.157	21.95	9M00G7D	QPSK
LTE Band 14	793	ERP	0.133	21.23	9M02W7D	16-QAM
LTE Band 14	793	ERP	0.104	20.15	9M02W7D	64-QAM
CDMA800 (BC10)	817.9 - 823.1	Conducted	0.314	24.97	1M28F9W	CDMA
LTE Band 26	814.7 - 823.3	Conducted	0.265	24.23	1M09G7D	QPSK
LTE Band 26	814.7 - 823.3	Conducted	0.229	23.59	1M08W7D	16-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.177	22.47	1M08W7D	64-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.264	24.21	2M69G7D	QPSK
LTE Band 26	815.5 - 822.5	Conducted	0.225	23.52	2M69W7D	16-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.173	22.38	2M68W7D	64-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.263	24.20	4M49G7D	QPSK
LTE Band 26	816.5 - 821.5	Conducted	0.233	23.68	4M50W7D	16-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.179	22.54	4M49W7D	64-QAM
LTE Band 26	819	Conducted	0.260	24.15	8M97G7D	QPSK
LTE Band 26	819	Conducted	0.221	23.44	8M97W7D	16-QAM
LTE Band 26	819	Conducted	0.155	21.91	8M98W7D	64-QAM
LTE Band 26	821.5	Conducted	0.265	24.24	13M4G7D	QPSK
LTE Band 26	821.5	Conducted	0.224	23.51	13M4W7D	16-QAM
LTE Band 26	821.5	Conducted	0.161	22.07	13M4W7D	64-QAM
LTE Band 26	821.5	ERP	0.097	19.87	13M4G7D	QPSK
LTE Band 26	821.5	ERP	0.082	19.14	13M4W7D	16-QAM
LTE Band 26	821.5	ERP	0.064	18.10	13M4W7D	64-QAM

EUT Overview

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 3 of 66	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 4 of 66	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF900U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90.543, 22(H) and 90.691.

Test Device Serial No.: 0037M, 0224M, 0341M, 0049M, 0003M

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EVDO (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 5 of 66	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§2.1053, §90.635, §90.691, §90.543

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log(\text{Power [Watts]})$ specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 6 of 66	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 7 of 66	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX2	Licensed Transmitter Cable Set	8/23/2018	Annual	8/23/2019	LTX2
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Anritsu	MT8821C	Radio Communication Analyzer	7/24/2018	Annual	7/24/2019	6201664756
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	9/17/2018	Annual	9/17/2019	441119
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	6/7/2018	Triennial	6/7/2021	9203-2178
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/28/2018	Biennial	3/28/2020	128337
Huber + Suhner	Sucoflex 102A	40GHz Radiated Cable Set	8/23/2018	Annual	8/23/2019	251425001
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/20/2018	Annual	3/20/2019	MY49430494
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
Mini Circuits	TVA-11-422	RF Power Amp	N/A		N/A	QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A		N/A	11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	9/25/2018	Annual	9/25/2019	102060
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/21/2018	Annual	5/21/2019	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/18/2018	Annual	6/18/2019	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/25/2018	Annual	6/25/2019	102133
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Test Antenna	7/16/2018	Biennial	7/16/2020	101073
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	9/19/2018	Annual	9/19/2019	100040
Seekonk	NC-100	Torque Wrench	5/9/2018	Biennial	5/9/2020	22217
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 8 of 66	

6.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission – BC10

Example: Channel 476 CDMA BC10 Mode 3rd Harmonic (2453.70MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 9 of 66	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF900U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO / LTE
 Band: Band Class 10 / Band 26 / Band 14

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.691 90.543	Conducted Band Edge / Spurious Emissions	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10\log(P)$ dB. > $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046 90.635	Conducted Power	< 100 Watts		PASS	Section 7.5
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
90.542	Effective Radiated Power (Band 14)	< 3 Watts max. ERP		PASS	Section 7.6
2.1053 90.691 90.543	Radiated Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04-A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 10 of 66	

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.11.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 11 of 66	

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


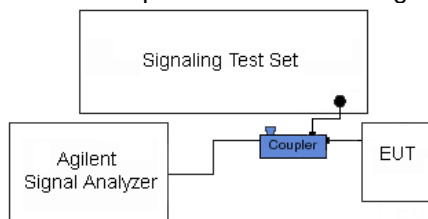


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 12 of 66	

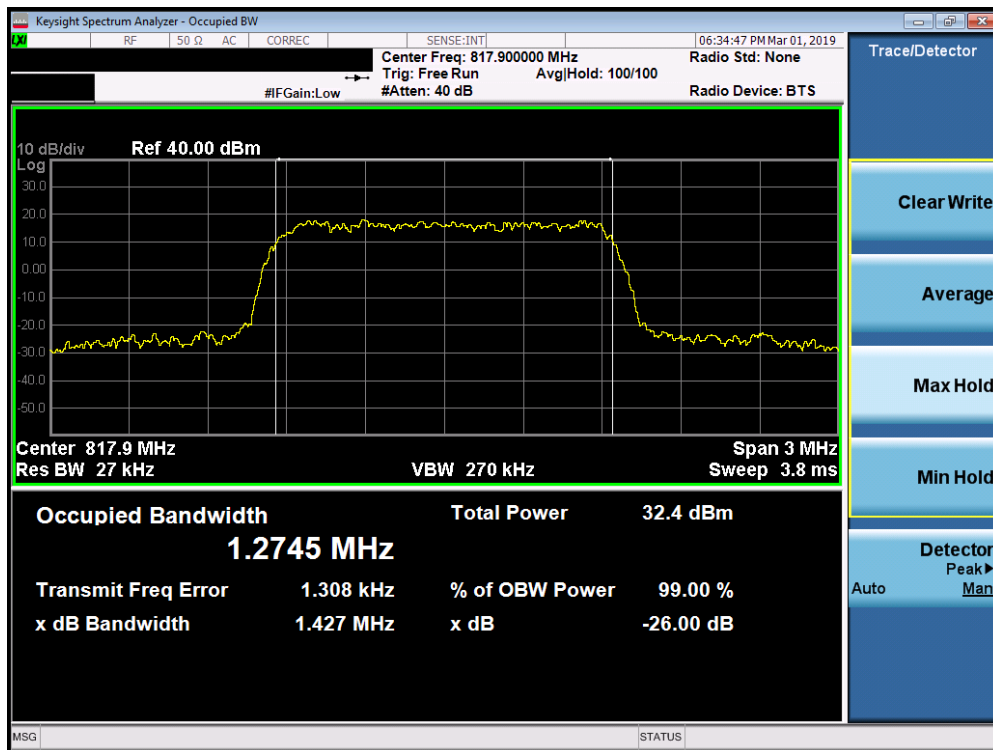


Plot 7-1. Occupied Bandwidth Plot (CDMA BC10 - Ch. 476)

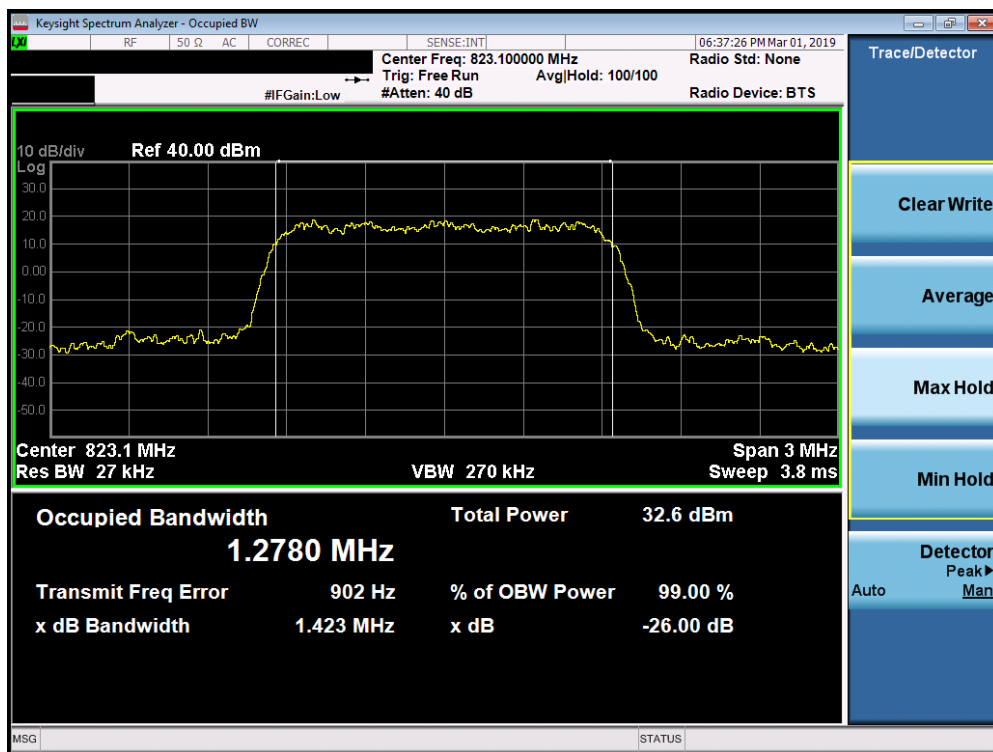


Plot 7-2. Occupied Bandwidth Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 13 of 66

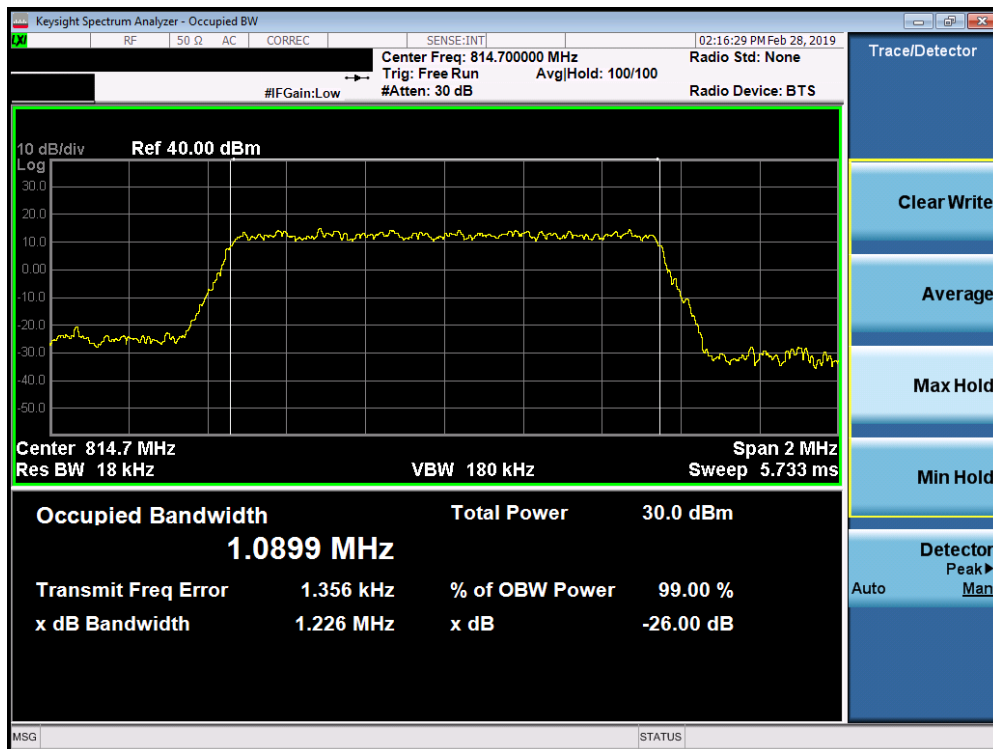


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6– Low Channel)

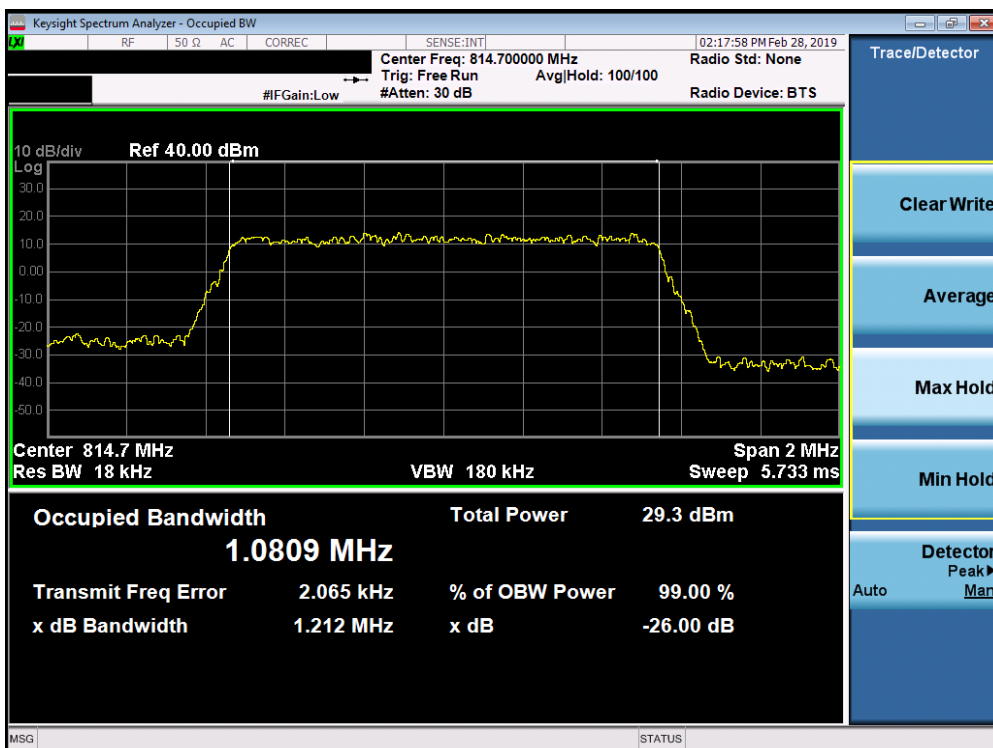


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 16-QAM – RB Size 6– Low Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04-A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 14 of 66

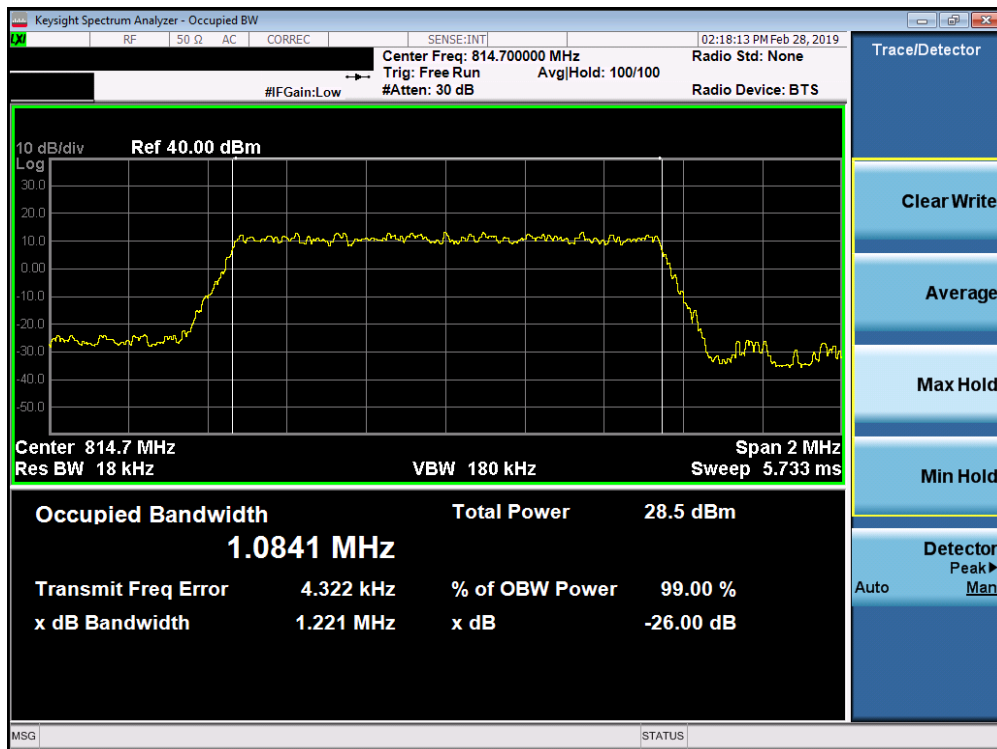


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 64-QAM – RB Size 6– Low Channel)

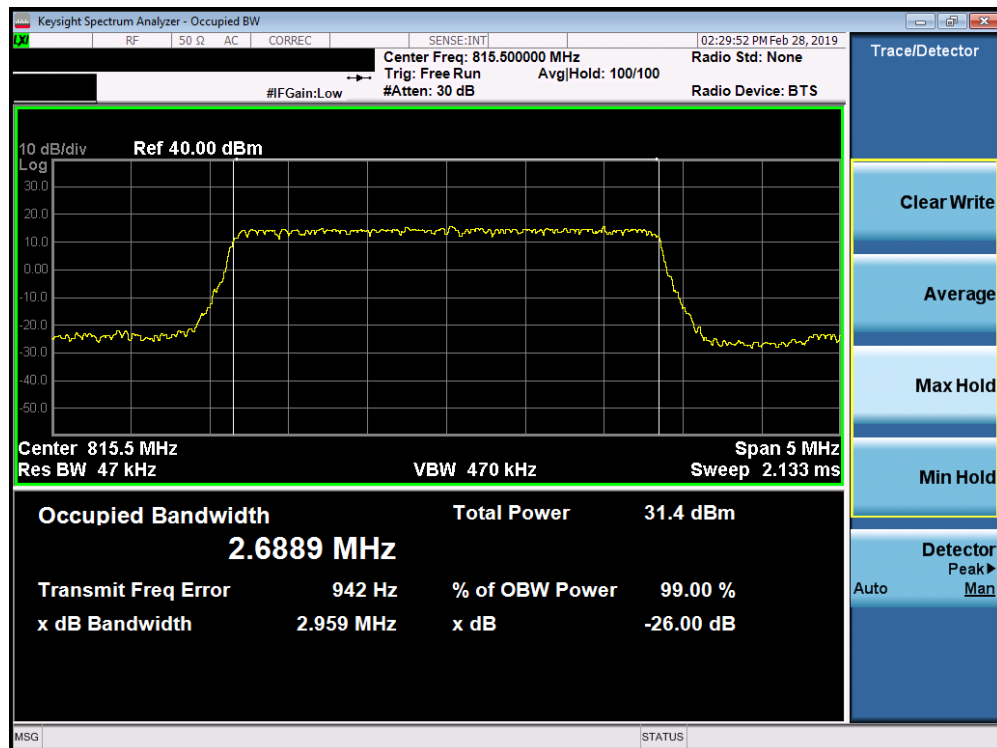


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26, 3MHz QPSK – RB Size 15– Low Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 15 of 66

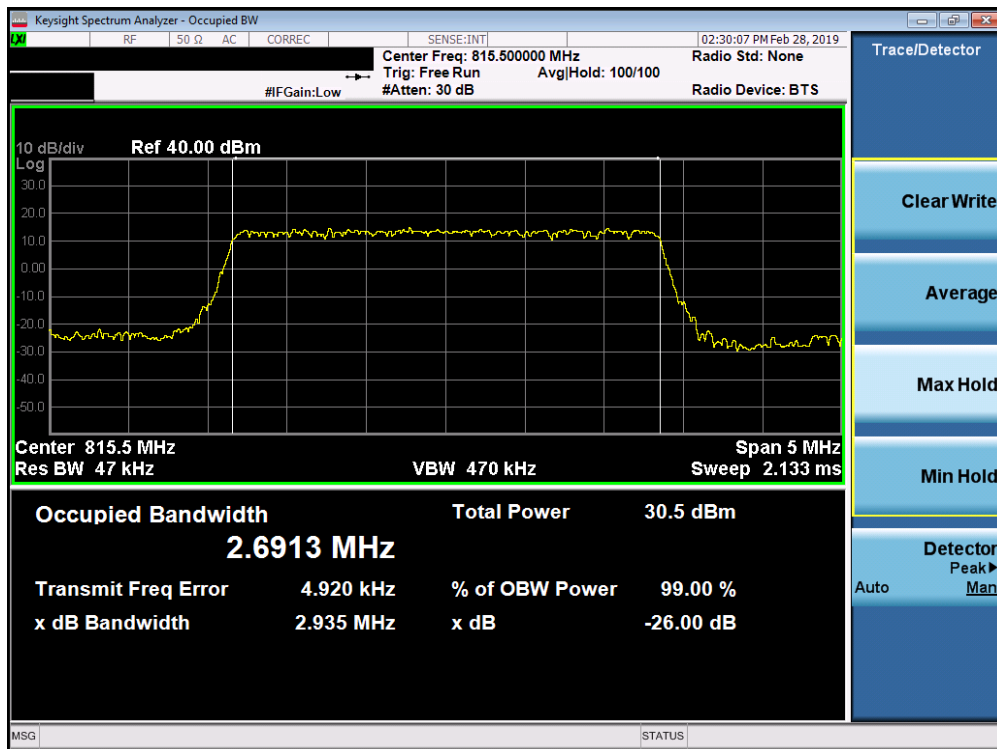


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26, 3MHz 16-QAM – RB Size 15– Low Channel)

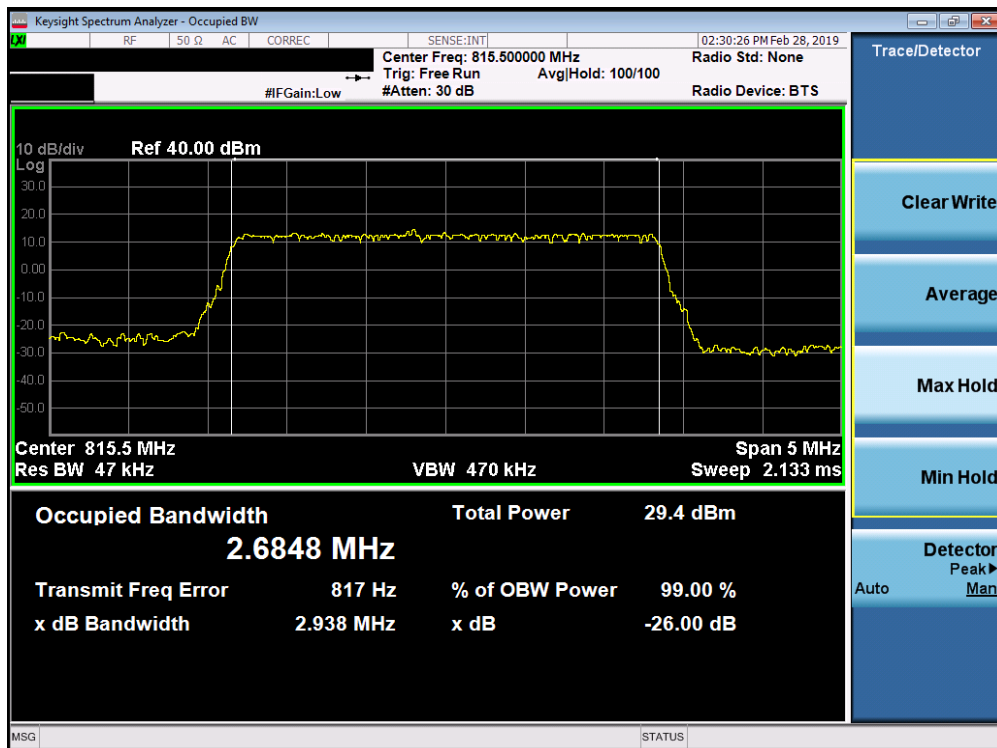


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26, 3MHz 64-QAM – RB Size 15– Low Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 16 of 66

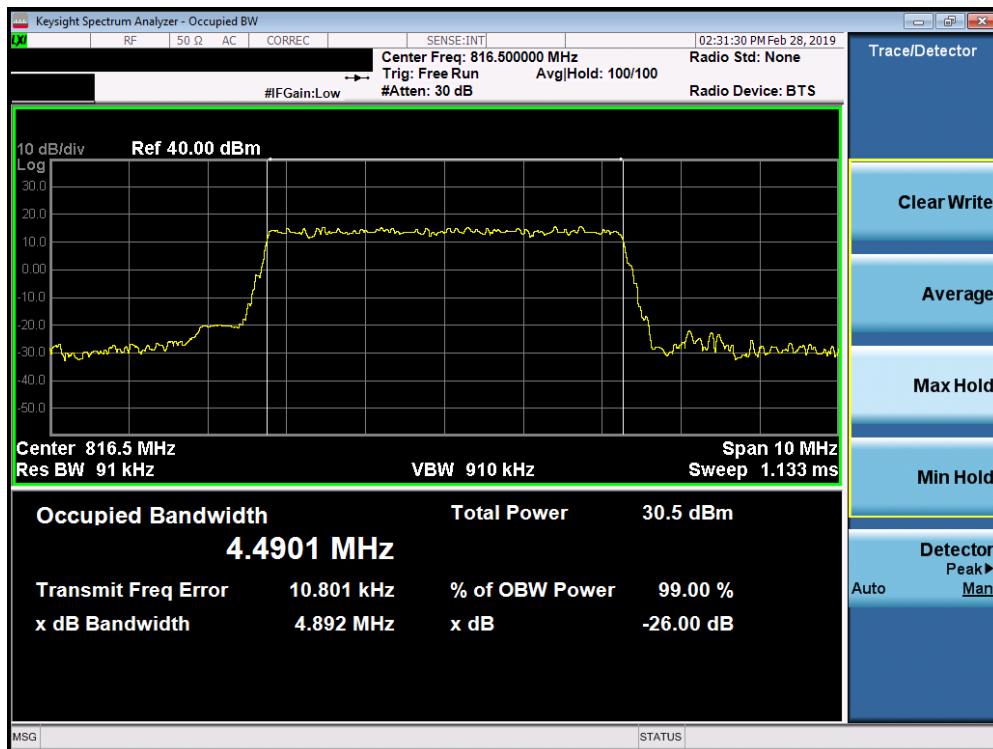


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

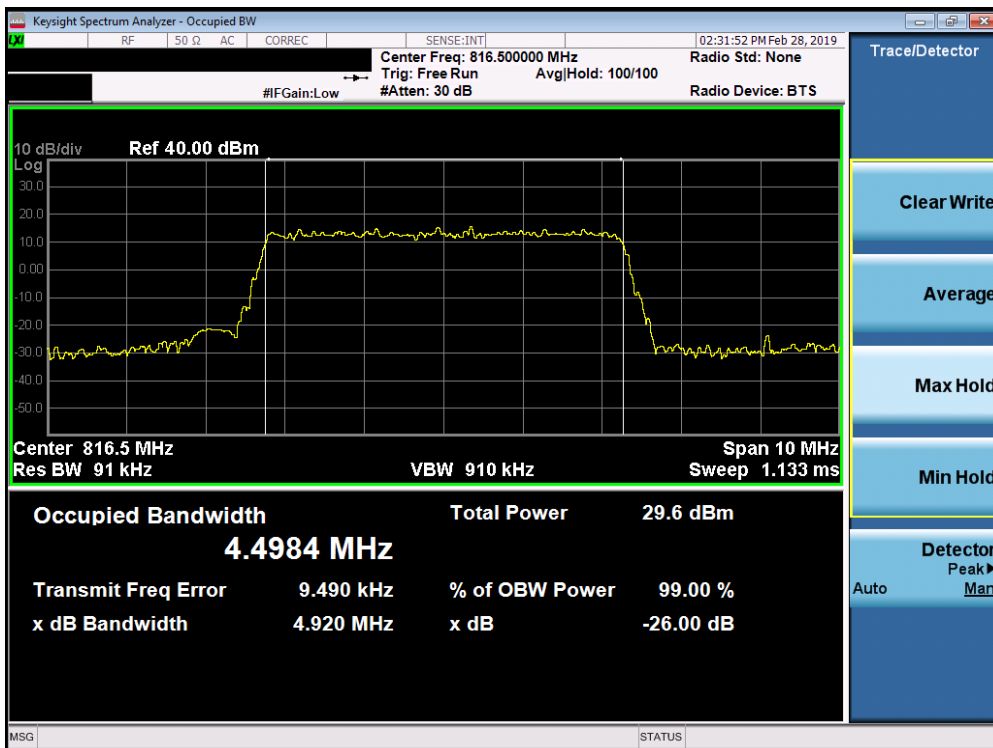


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26, 5MHz 16-QAM – RB Size 25– Low Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04-A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 17 of 66

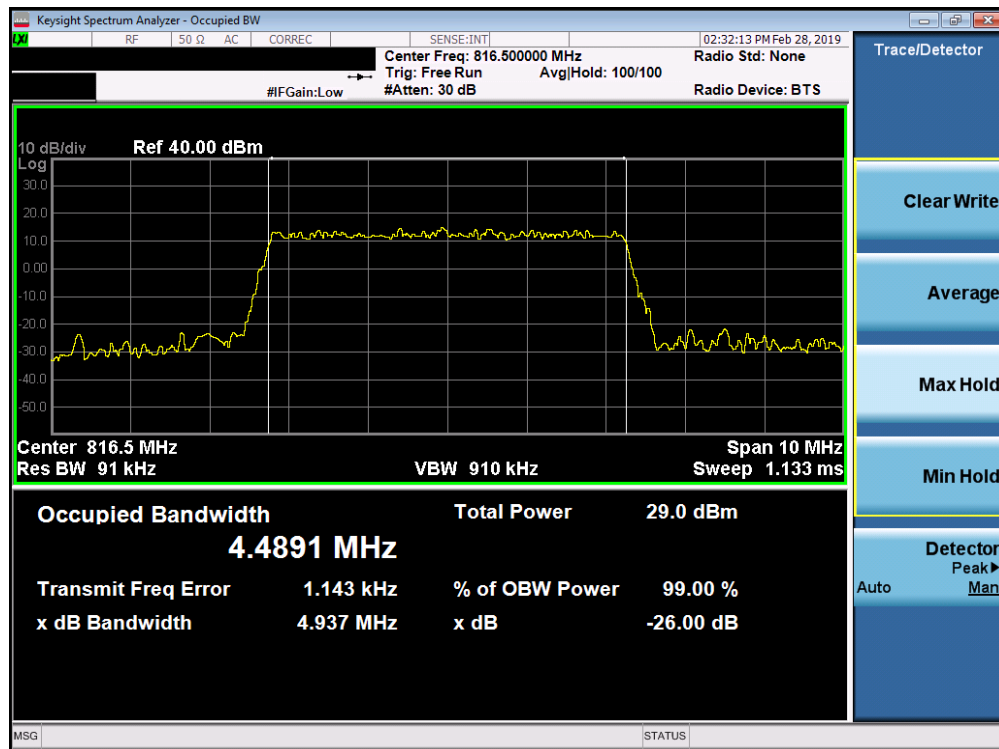


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26, 5MHz 64-QAM – RB Size 25– Low Channel)

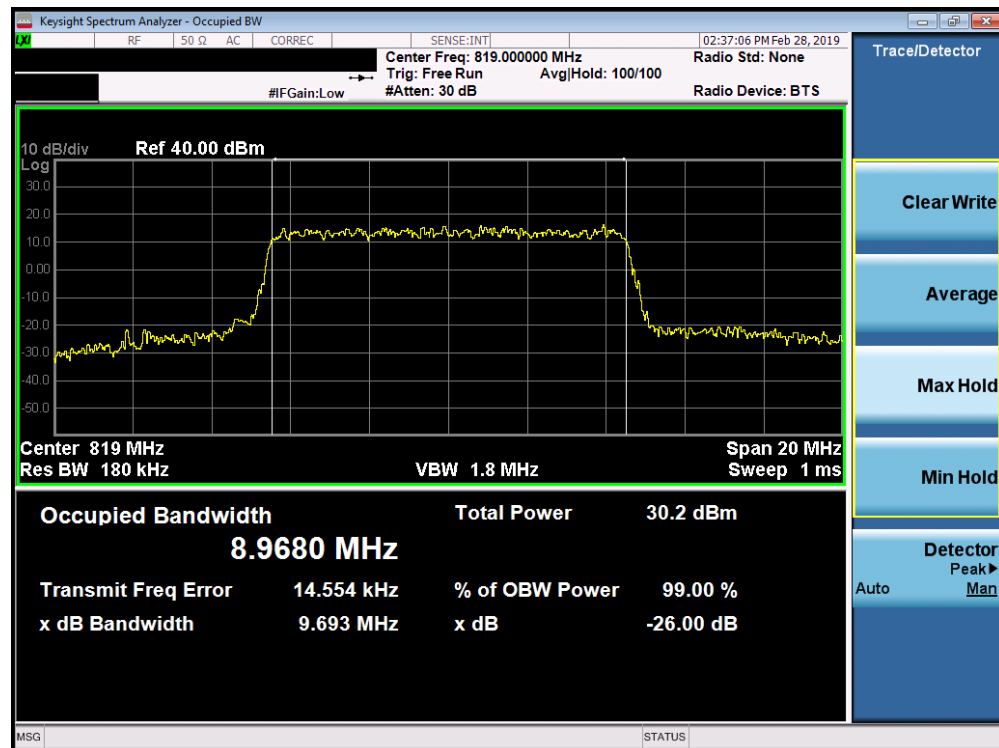


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 18 of 66

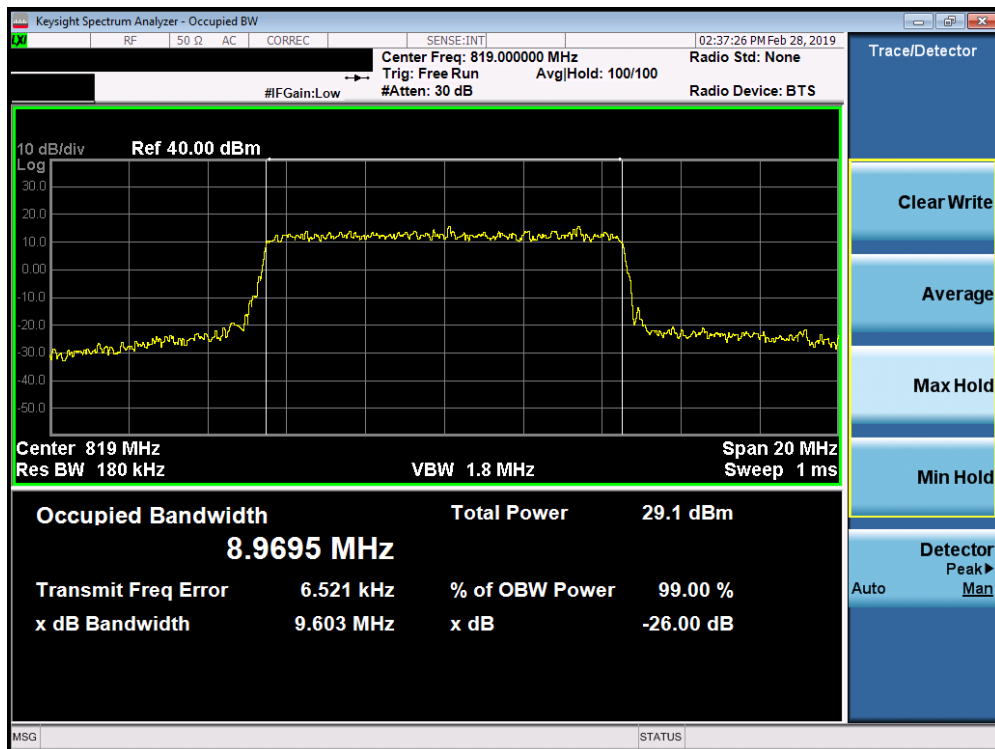


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26, 10MHz 16-QAM – RB Size 50)

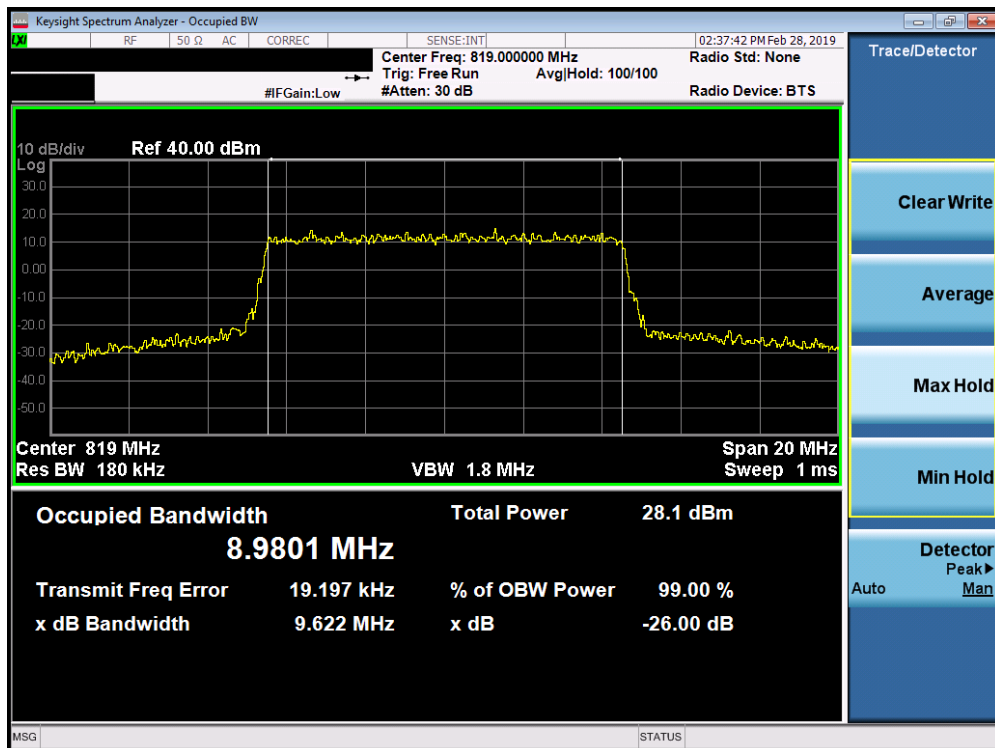


Plot 7-14. Occupied Bandwidth Plot (LTE Band 26, 10MHz 64-QAM – RB Size 50)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 19 of 66

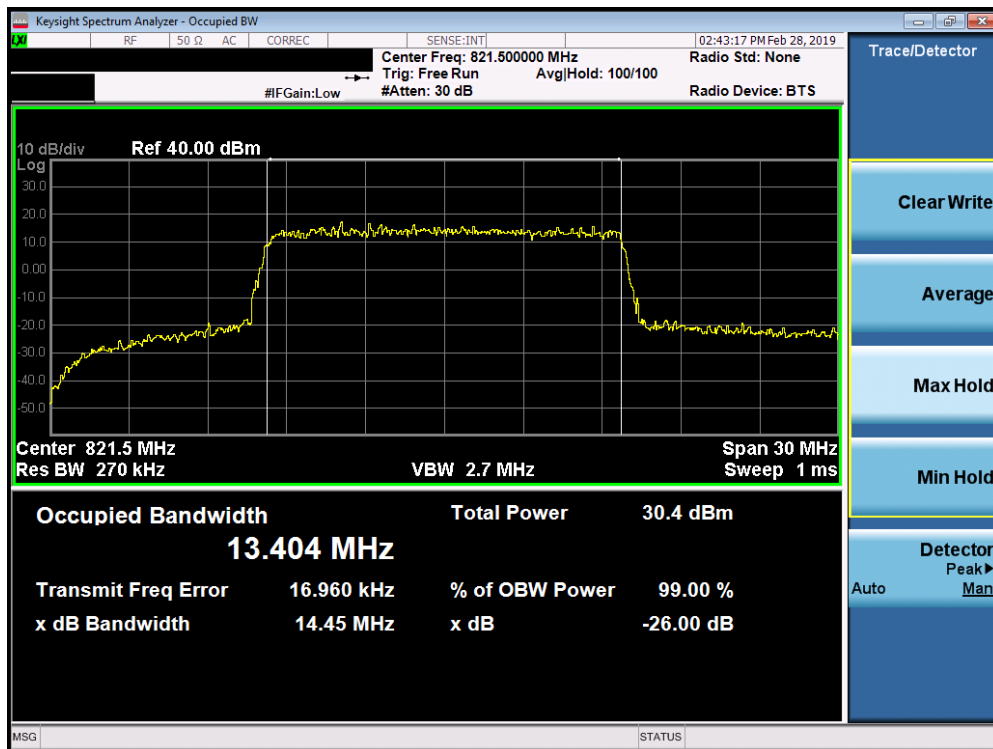


Plot 7-15. Occupied Bandwidth Plot (LTE Band 26, 15MHz QPSK – RB Size 75)

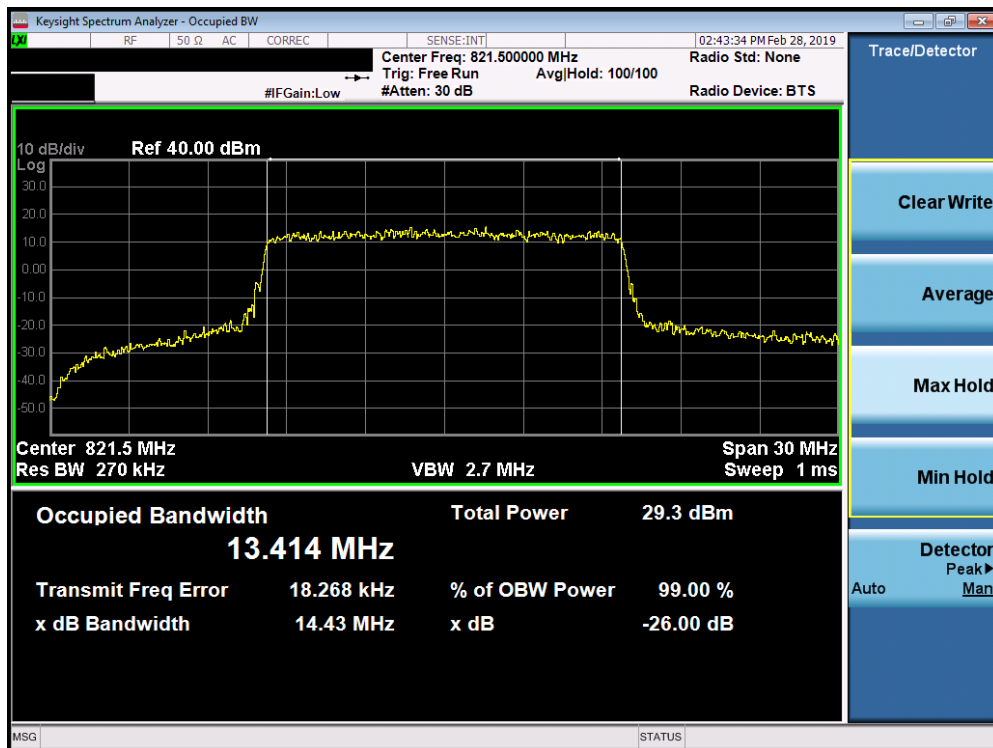


Plot 7-16. Occupied Bandwidth Plot (LTE Band 26, 15MHz 16-QAM – RB Size 75)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 20 of 66

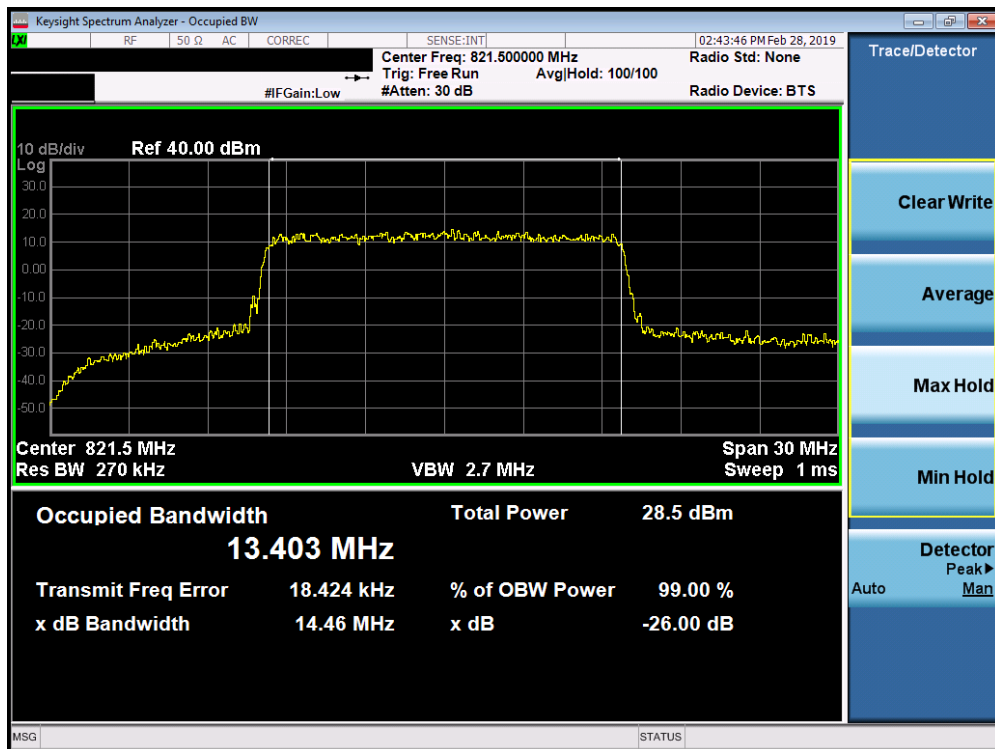


Plot 7-17. Occupied Bandwidth Plot (LTE Band 26, 15MHz 64-QAM – RB Size 75)

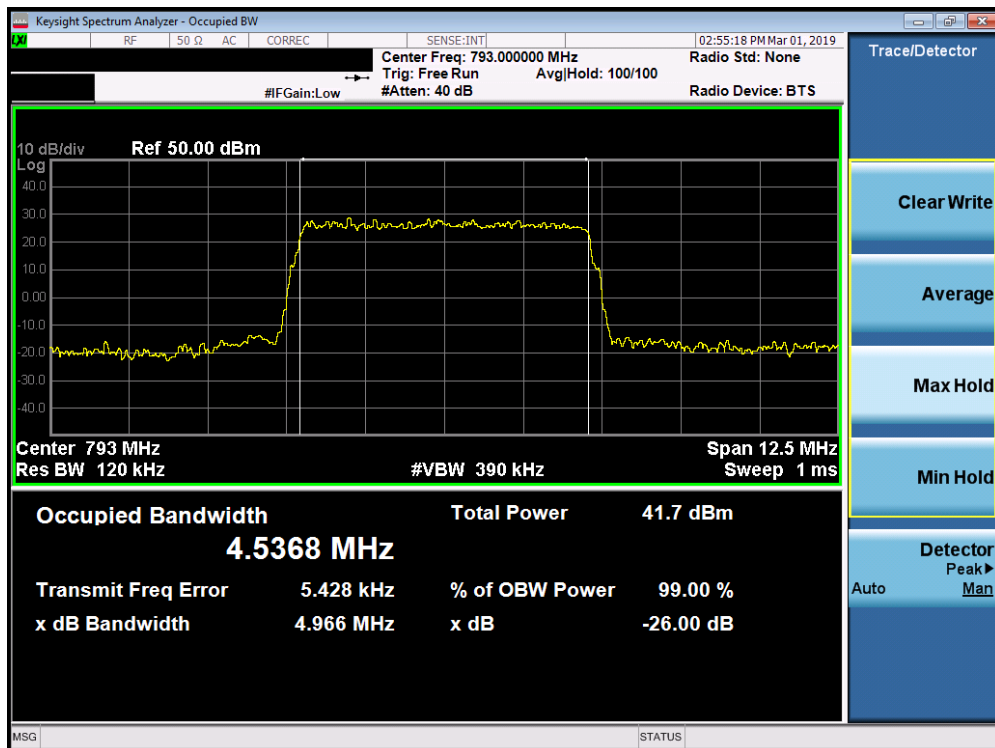


Plot 7-18. Occupied Bandwidth Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 21 of 66

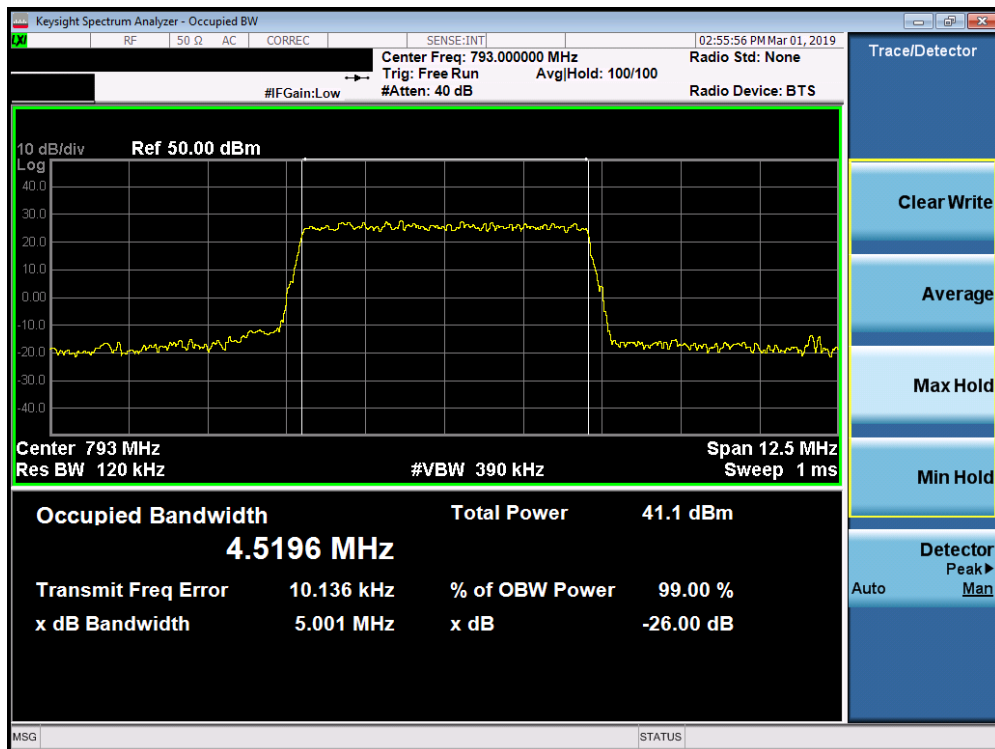


Plot 7-19. Occupied Bandwidth Plot (LTE Band 14, 5MHz 16-QAM – RB Size 25)

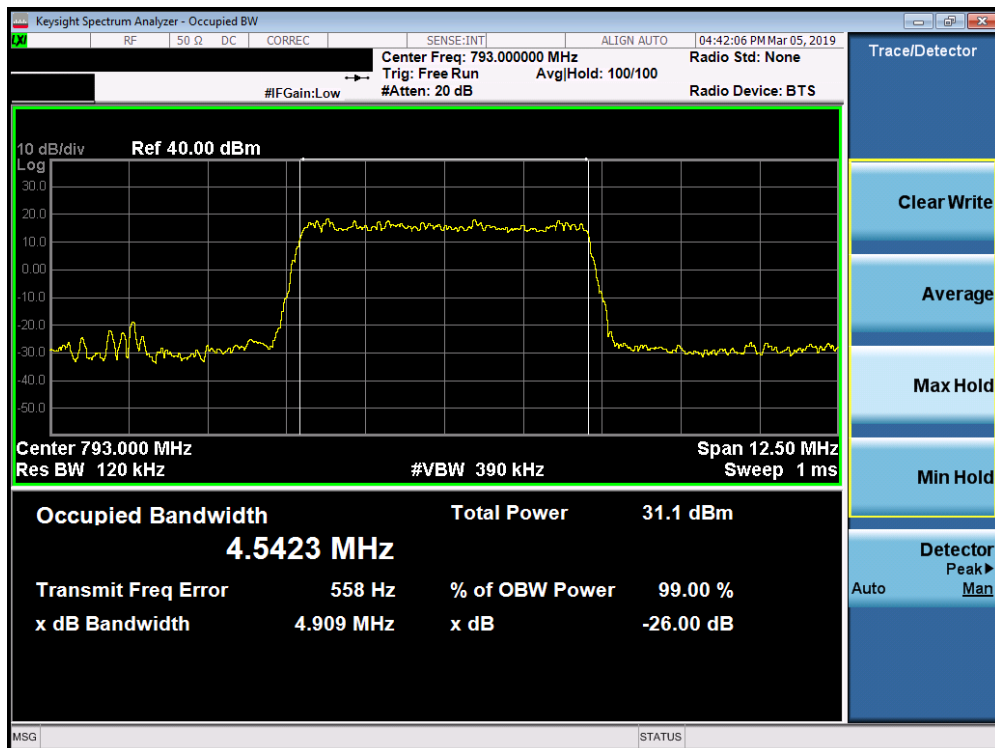


Plot 7-20. Occupied Bandwidth Plot (LTE Band 14, 5MHz 64-QAM – RB Size 25)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 22 of 66

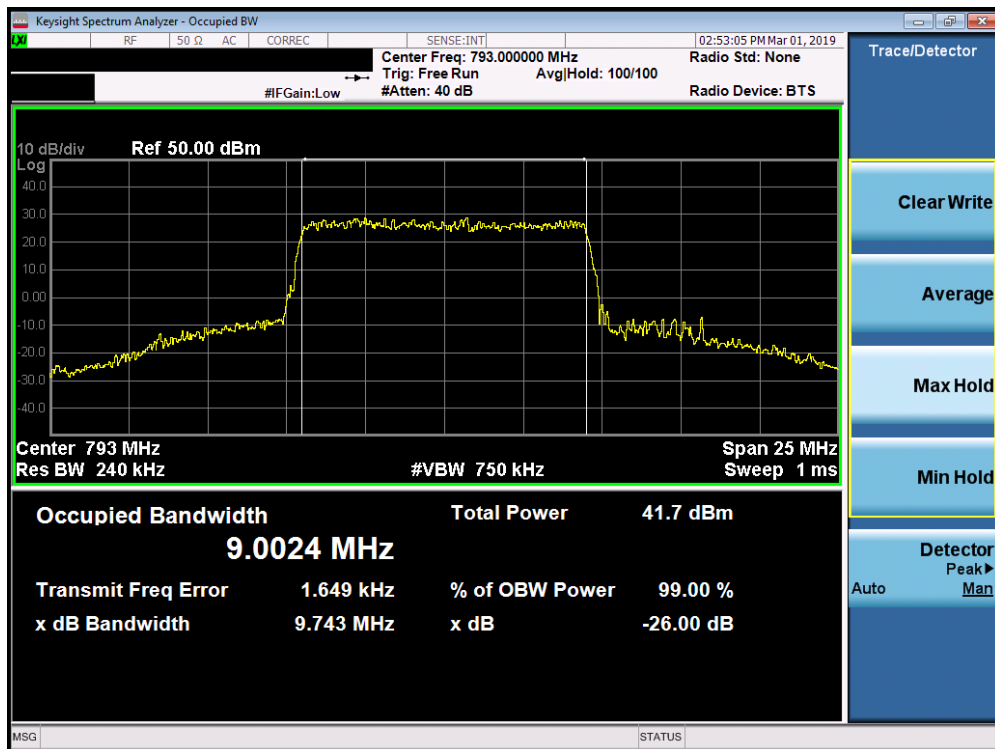


Plot 7-21. Occupied Bandwidth Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

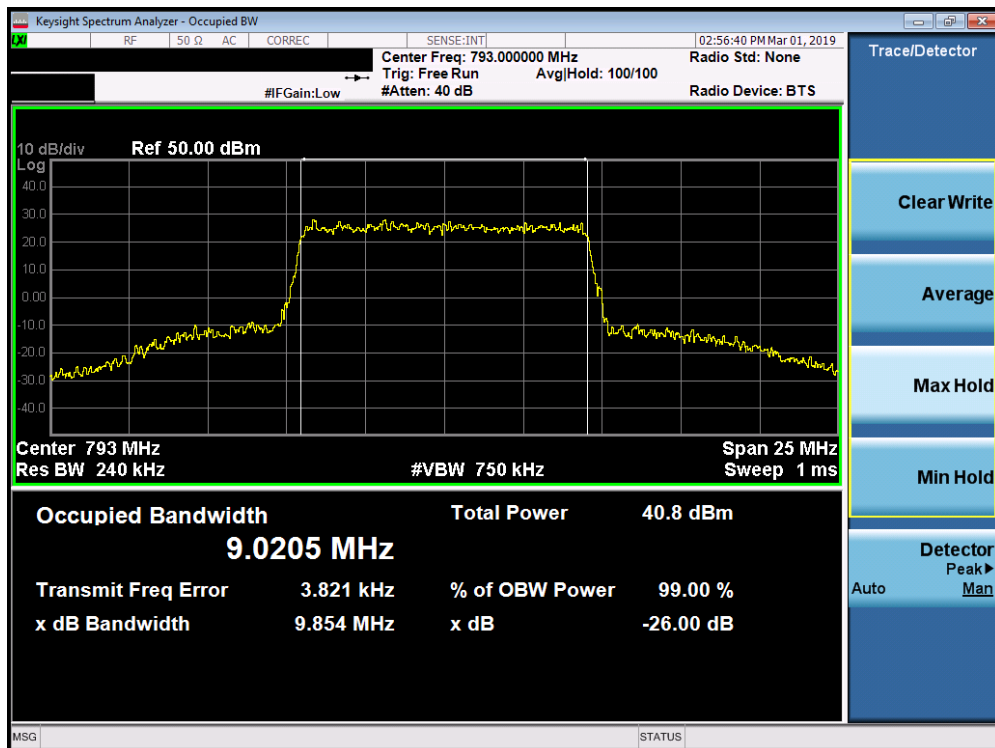

Plot 7-22. Occupied Bandwidth Plot (LTE Band 14, 10MHz 16-QAM – RB Size 50)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 23 of 66

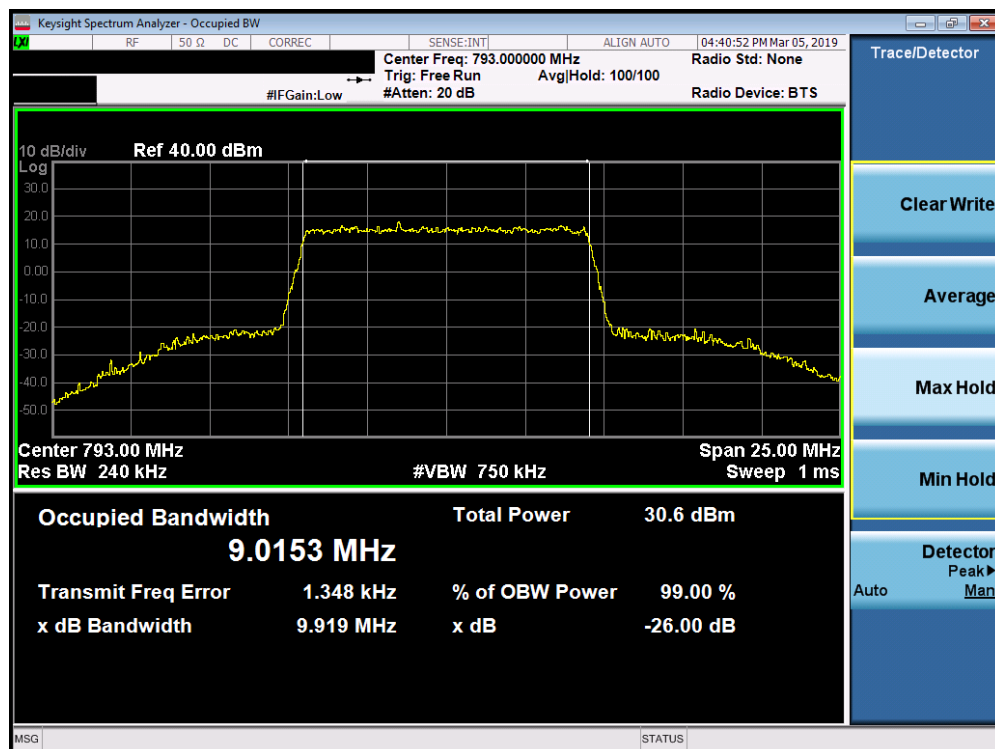

Plot 7-23. Occupied Bandwidth Plot (LTE Band 14, 10MHz 64-QAM – RB Size 50)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 24 of 66

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90.691 §90.543

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW $\geq$ 1MHz
3. VBW $\geq$ 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


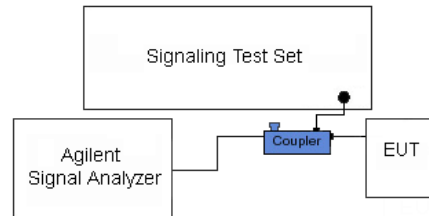


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 25 of 66

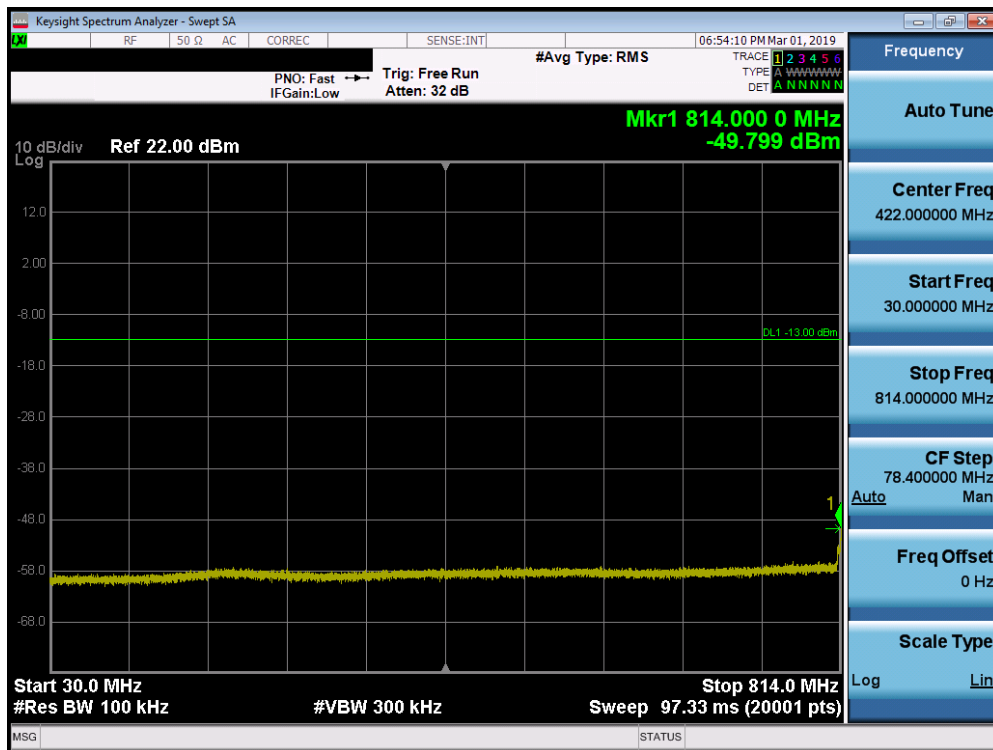


Plot 7-24. Conducted Spurious Plot (CDMA BC10 - Ch. 476)

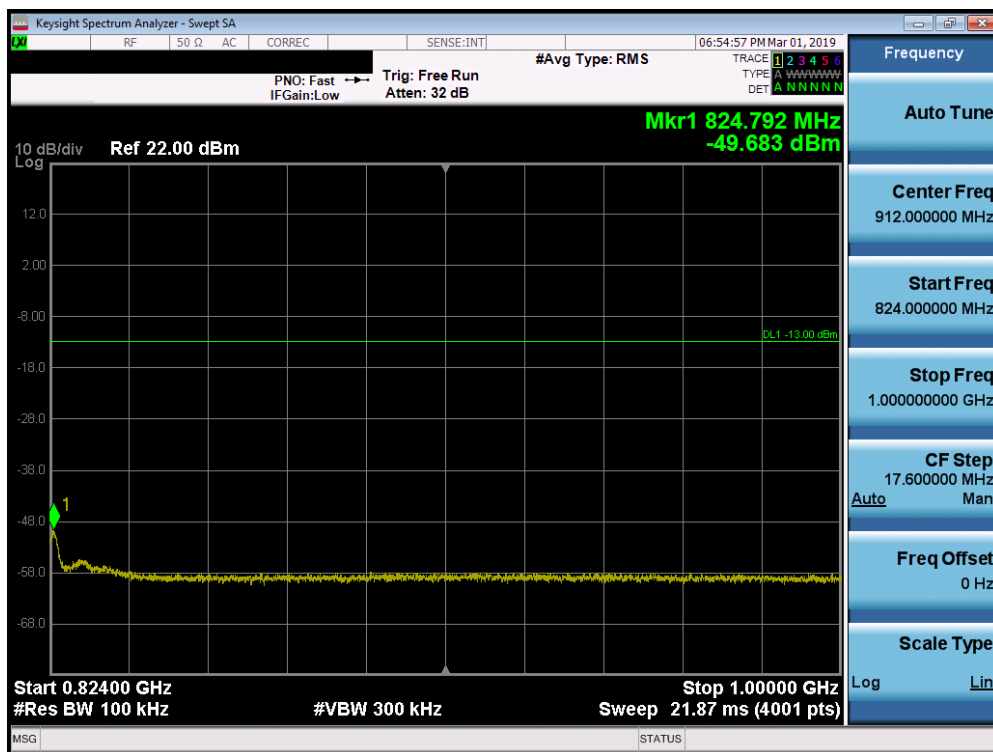


Plot 7-25. Conducted Spurious Plot (CDMA BC10 - Ch. 476)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 26 of 66

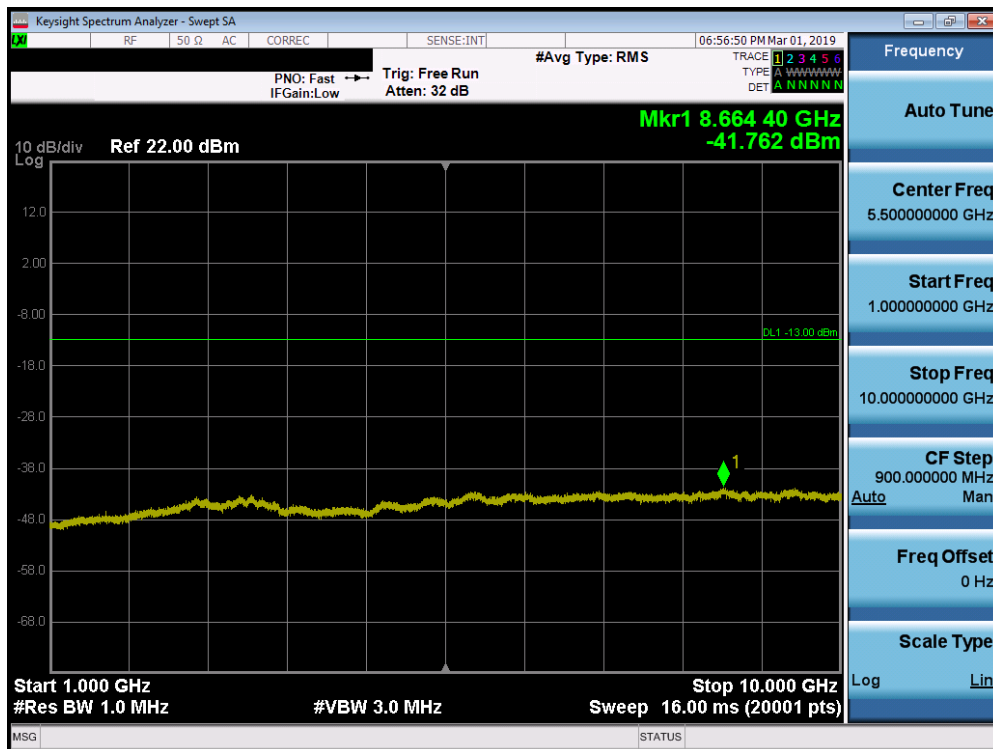


Plot 7-26. Conducted Spurious Plot (CDMA BC10 - Ch. 476)

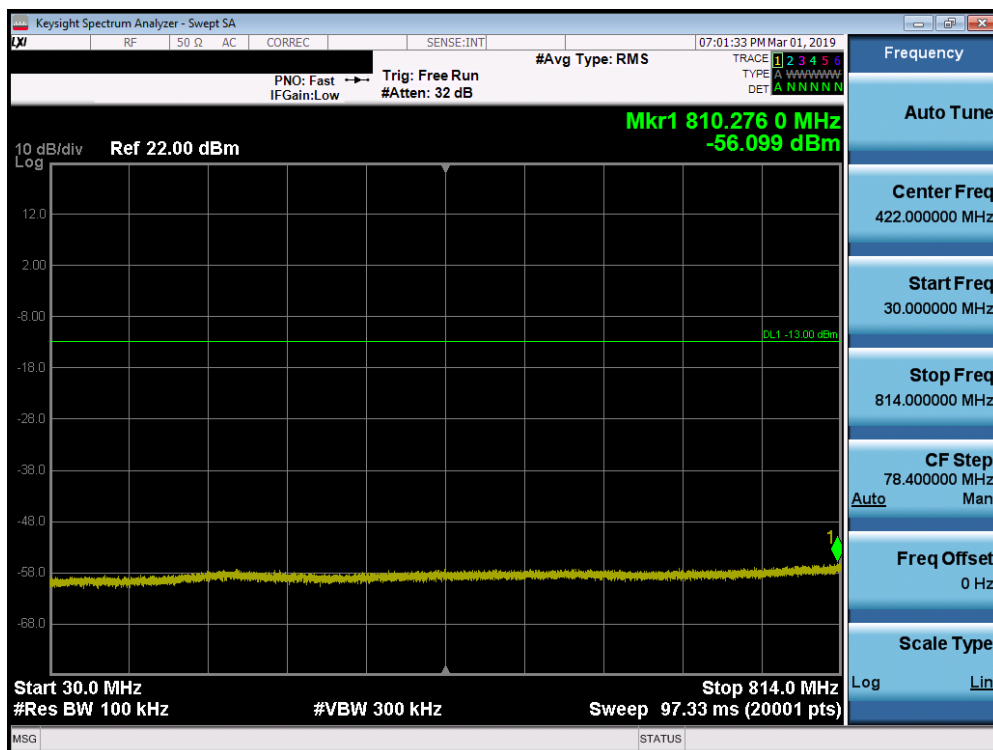


Plot 7-27. Conducted Spurious Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 27 of 66

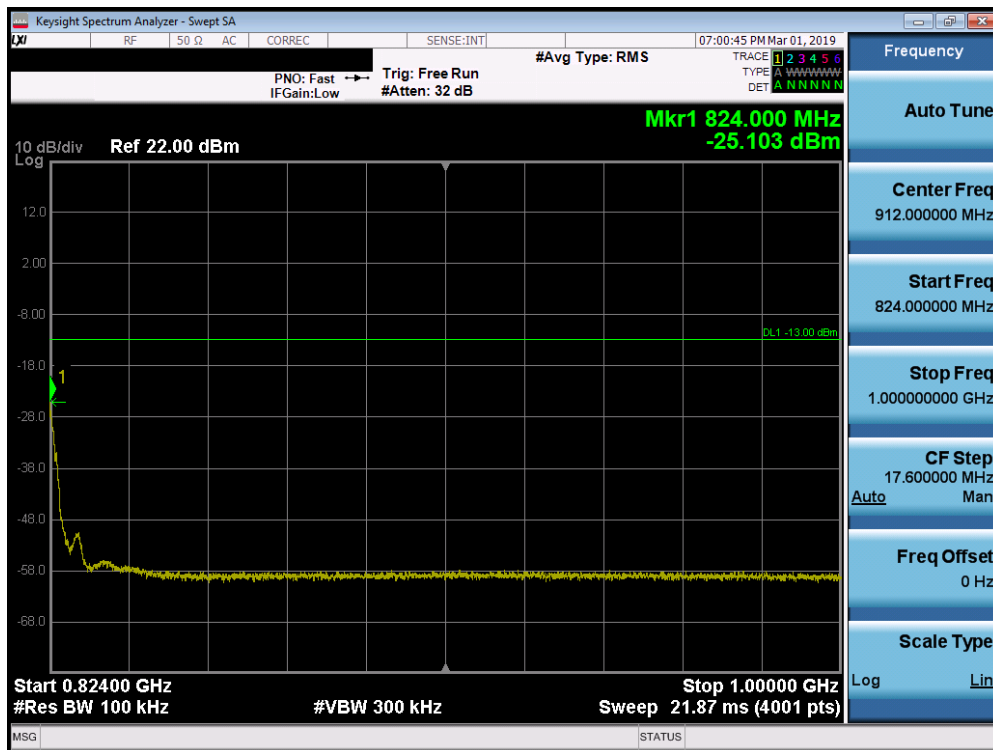


Plot 7-28. Conducted Spurious Plot (CDMA BC10 - Ch. 684)

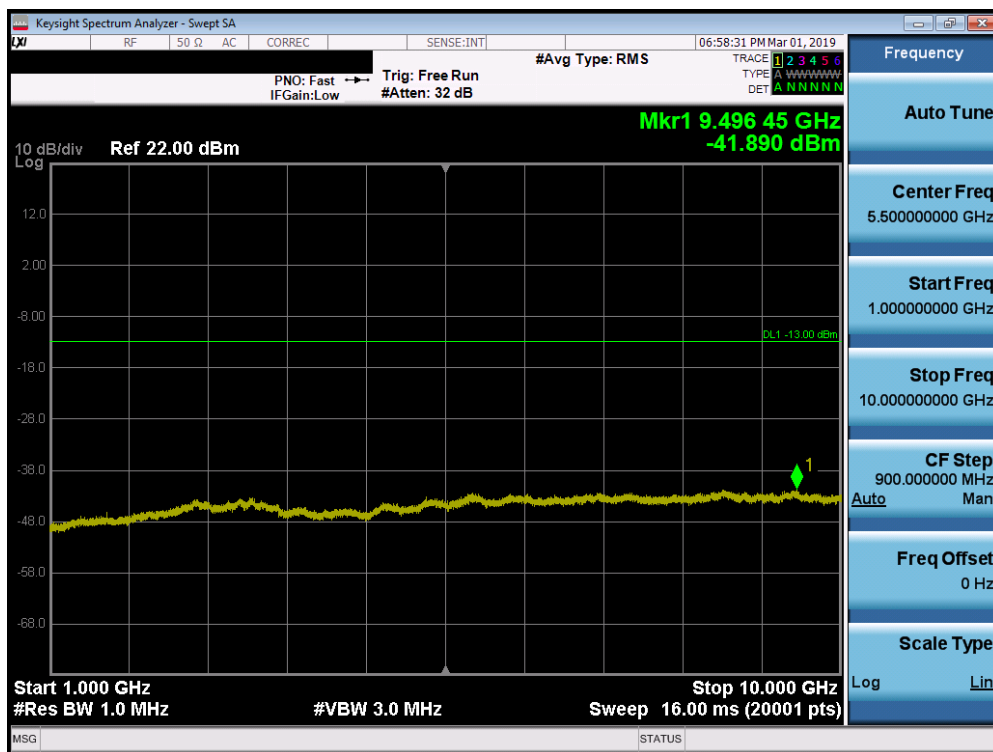


Plot 7-29. Conducted Spurious Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 28 of 66

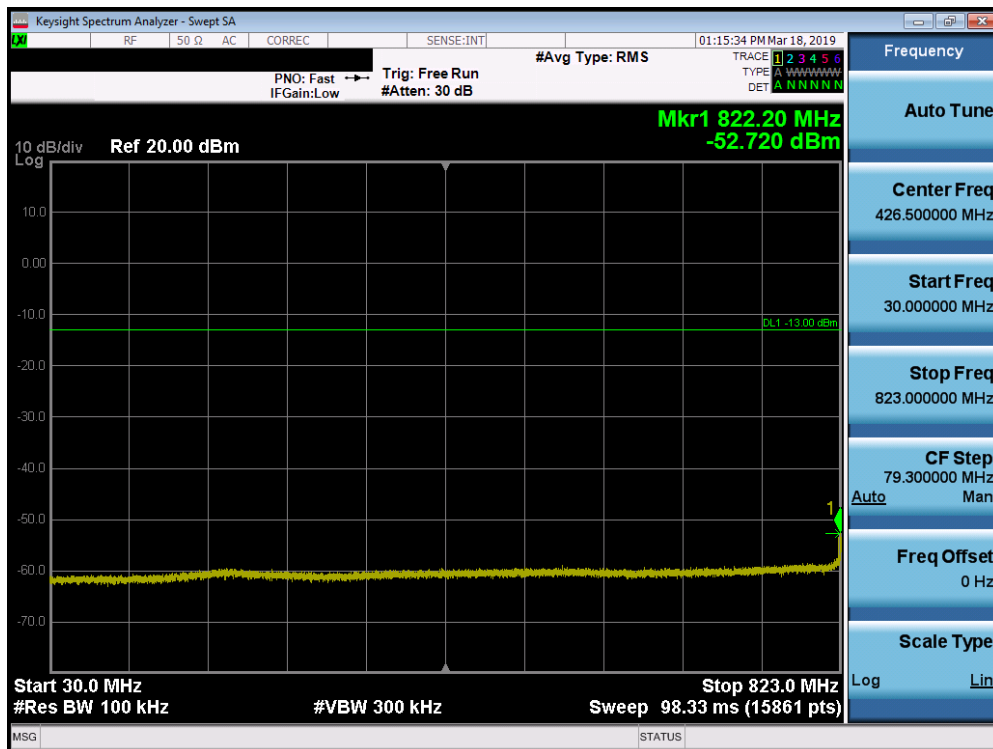


Plot 7-30. Conducted Spurious Plot (LTE Band 26, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

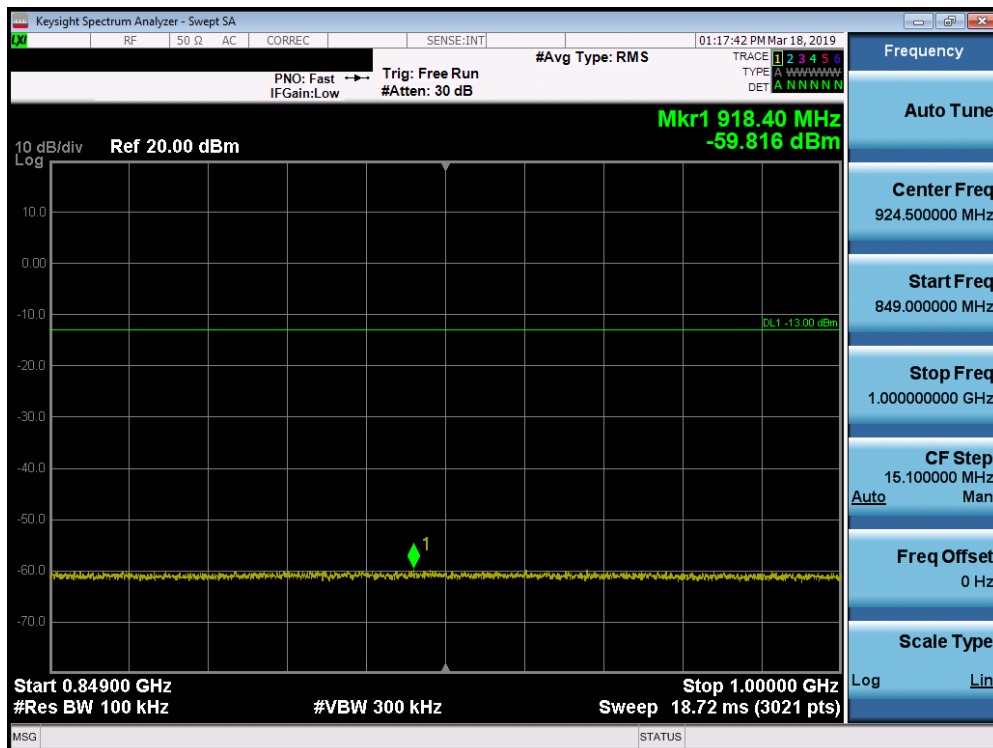


Plot 7-31. Conducted Spurious Plot (LTE Band 26, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 29 of 66

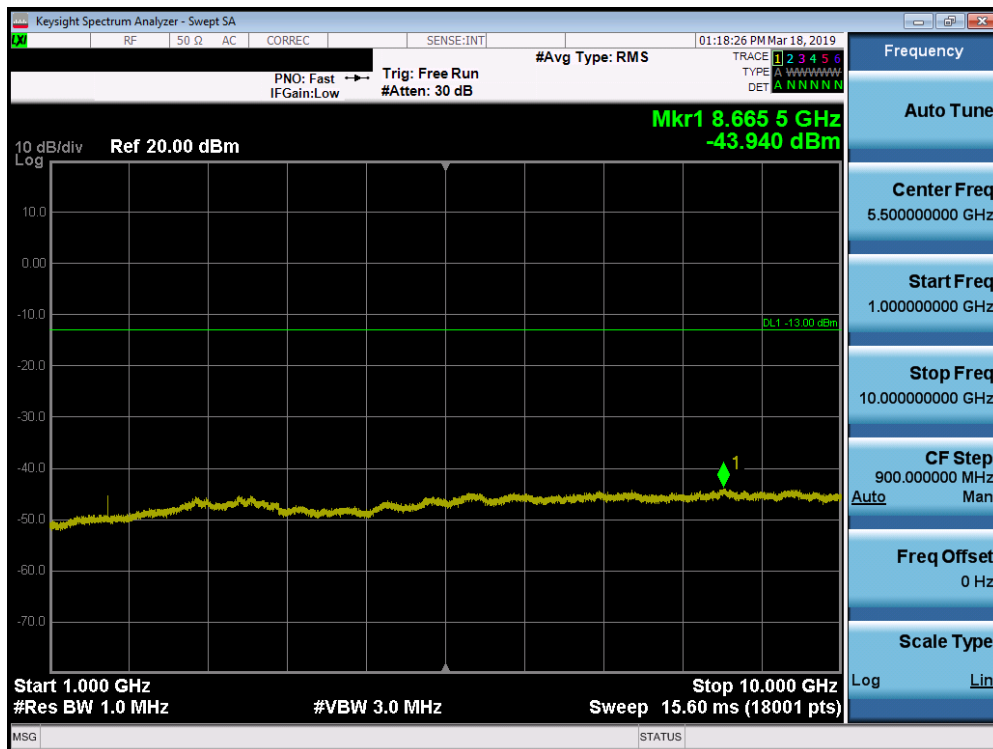


Plot 7-32. Conducted Spurious Plot (LTE Band 26, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

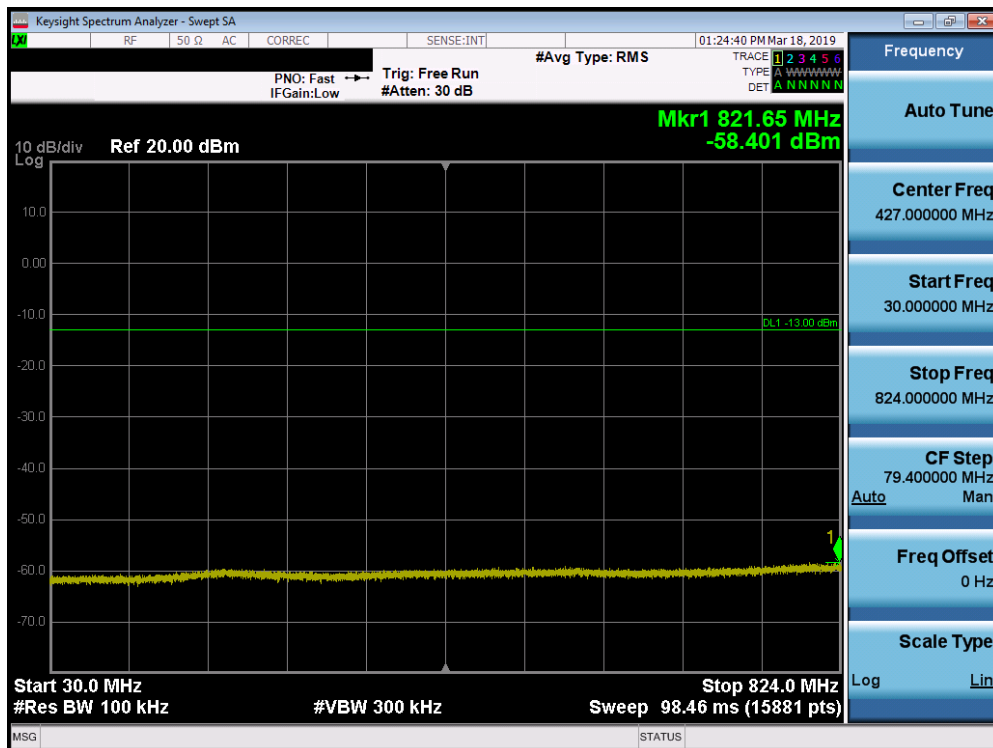


Plot 7-33. Conducted Spurious Plot (LTE Band 26, 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 30 of 66

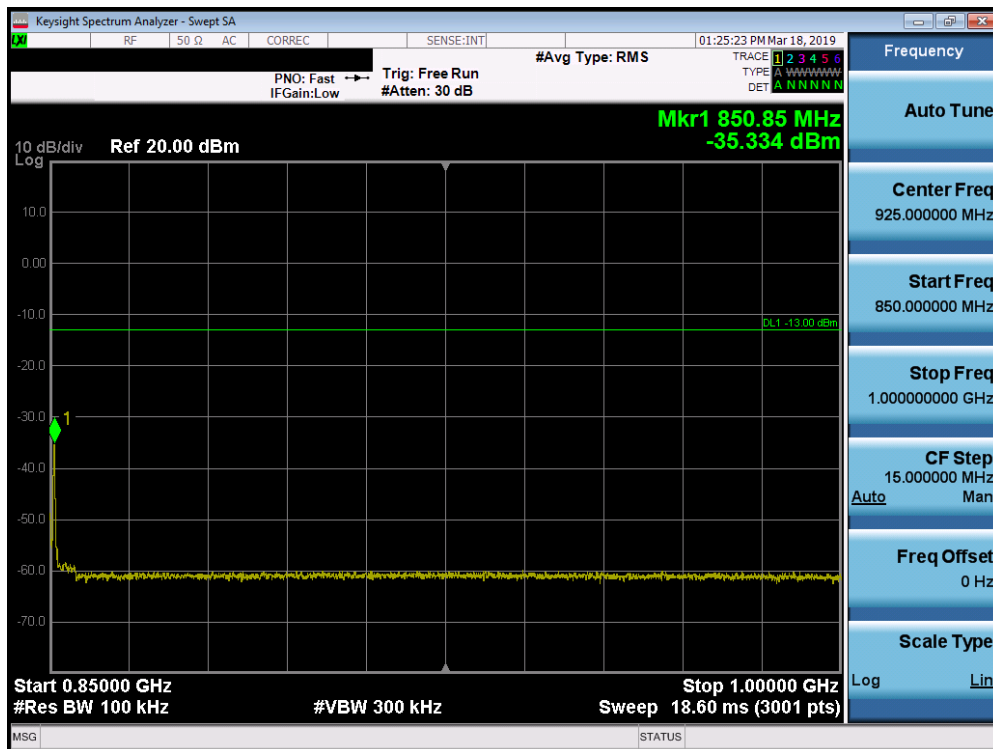


Plot 7-34. Conducted Spurious Plot (LTE Band 26, 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

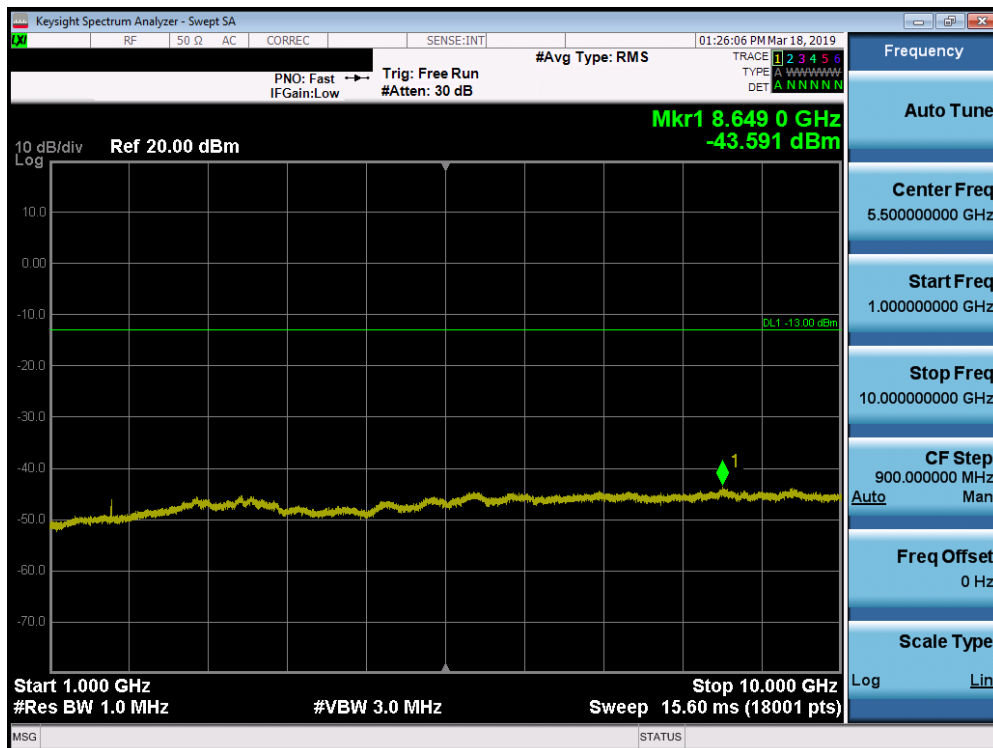


Plot 7-35. Conducted Spurious Plot (LTE Band 26, 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 31 of 66

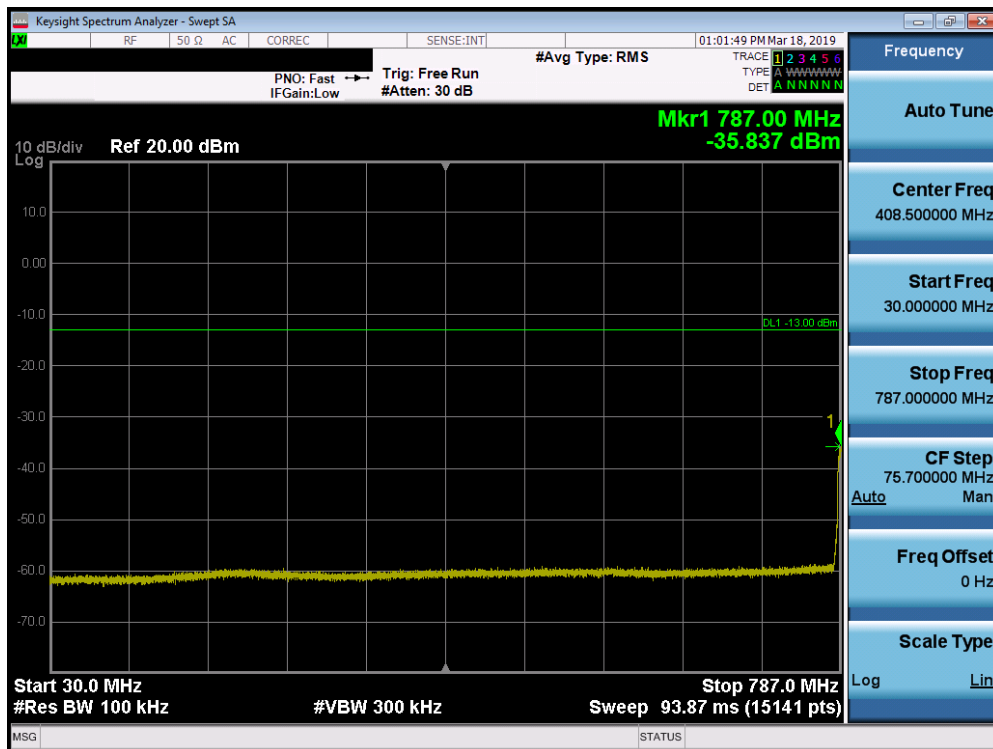


Plot 7-36. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

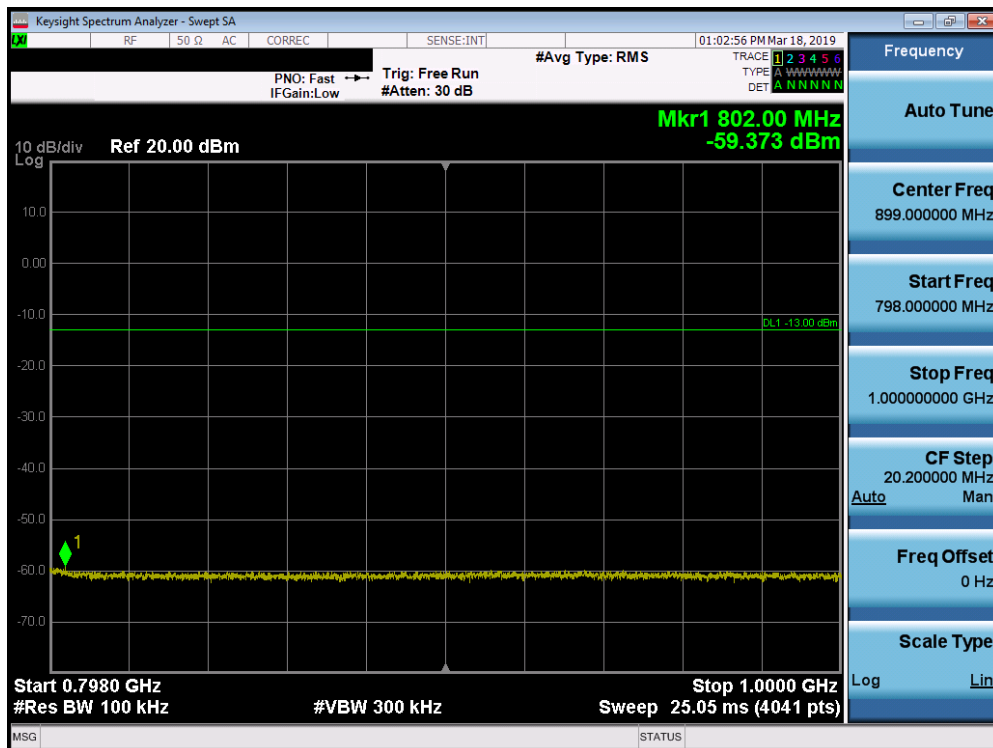


Plot 7-37. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 32 of 66

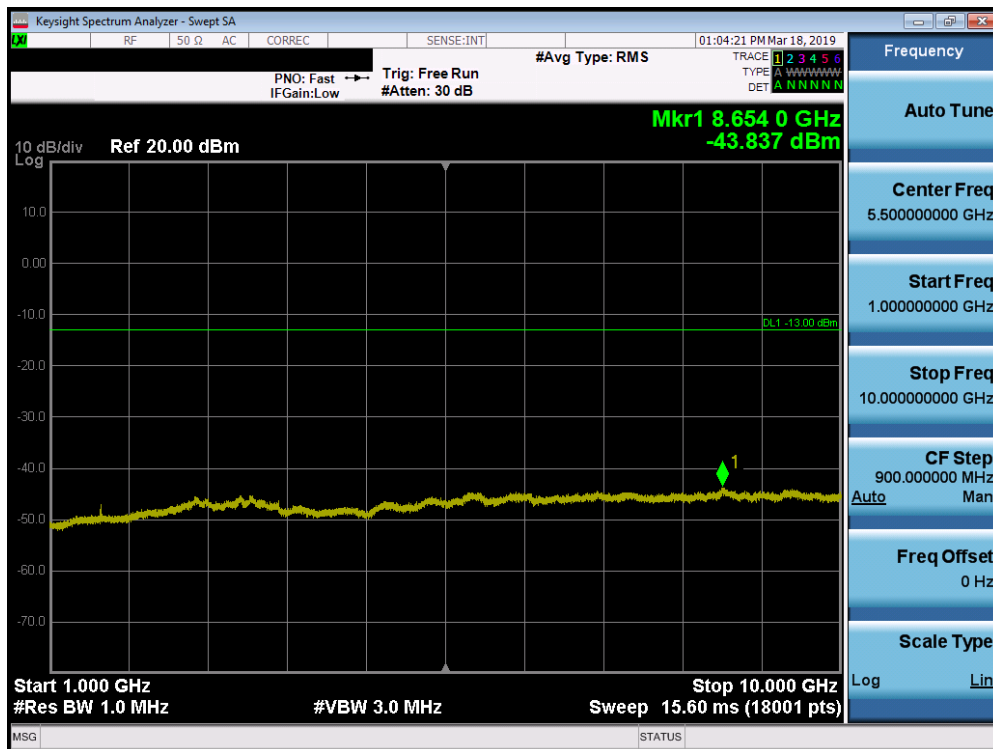


Plot 7-38. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

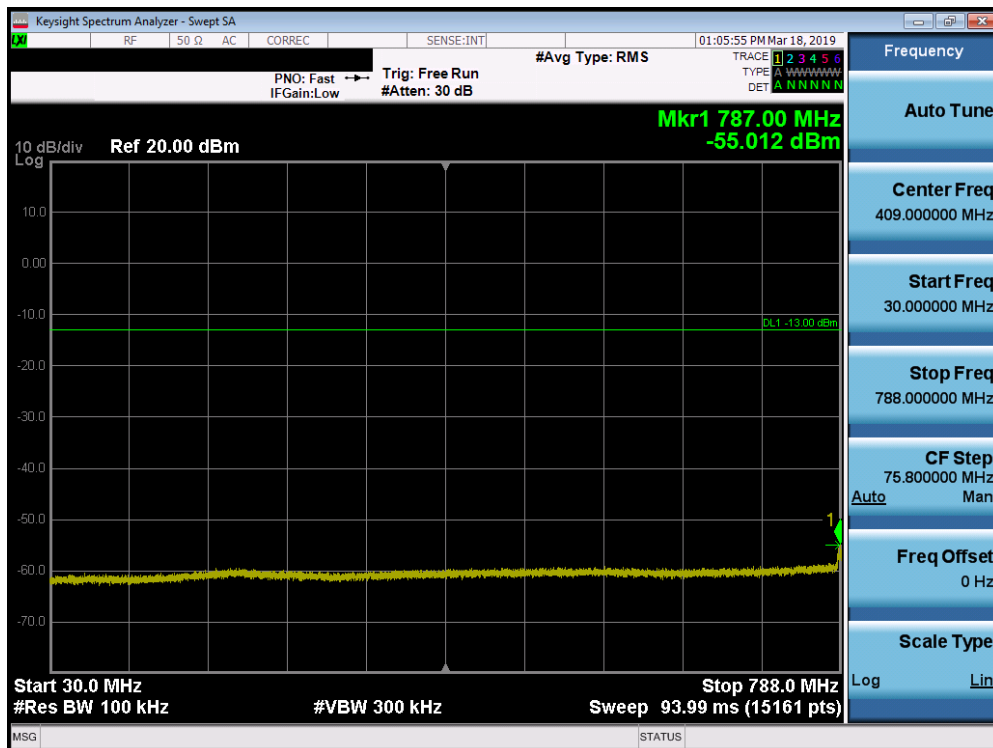


Plot 7-39. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 33 of 66

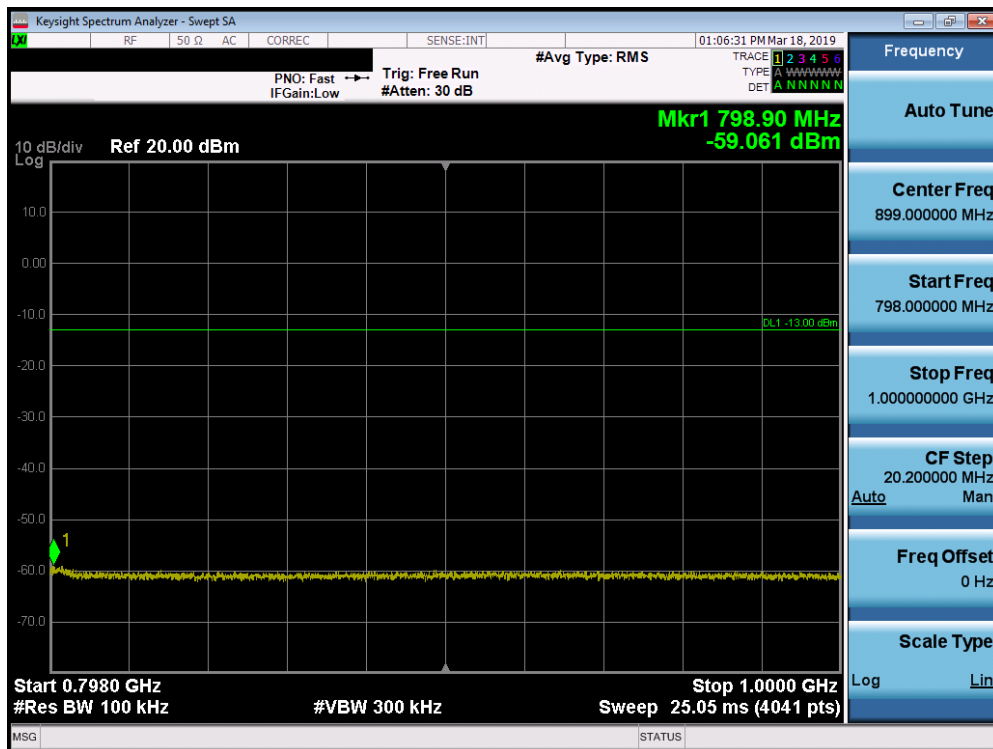


Plot 7-40. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

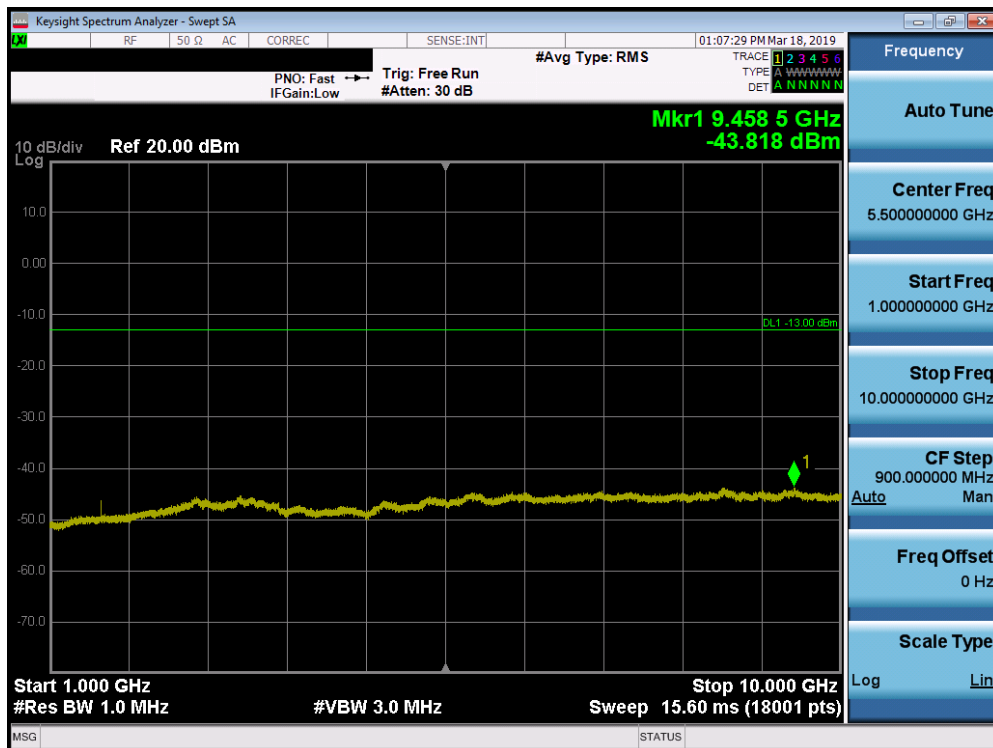


Plot 7-41. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 34 of 66

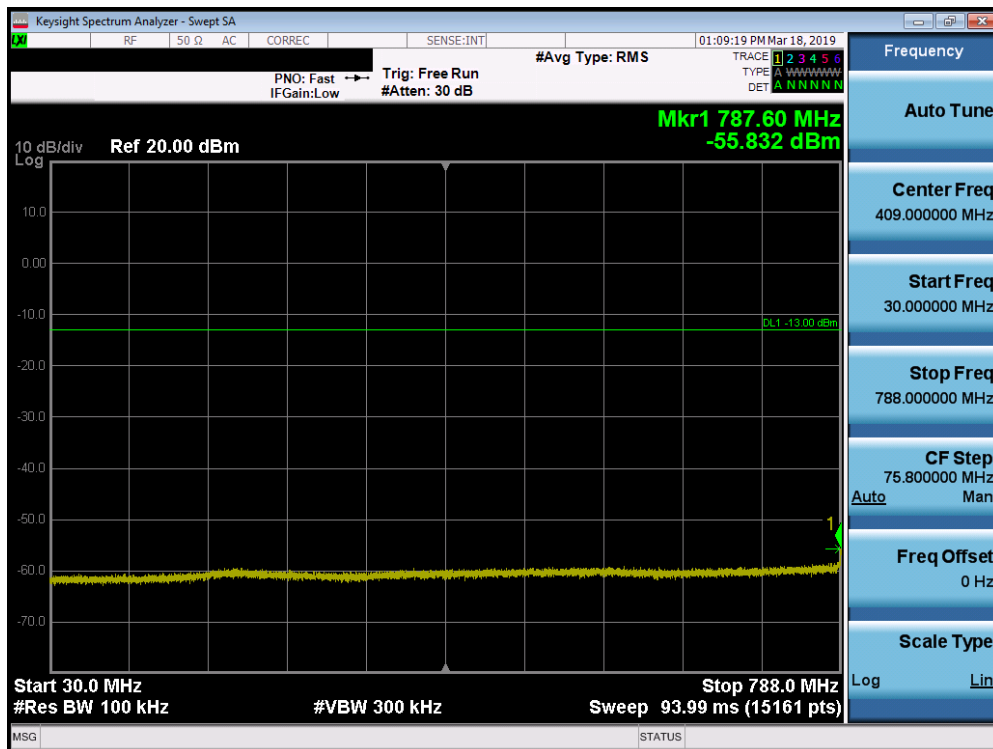


Plot 7-42. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

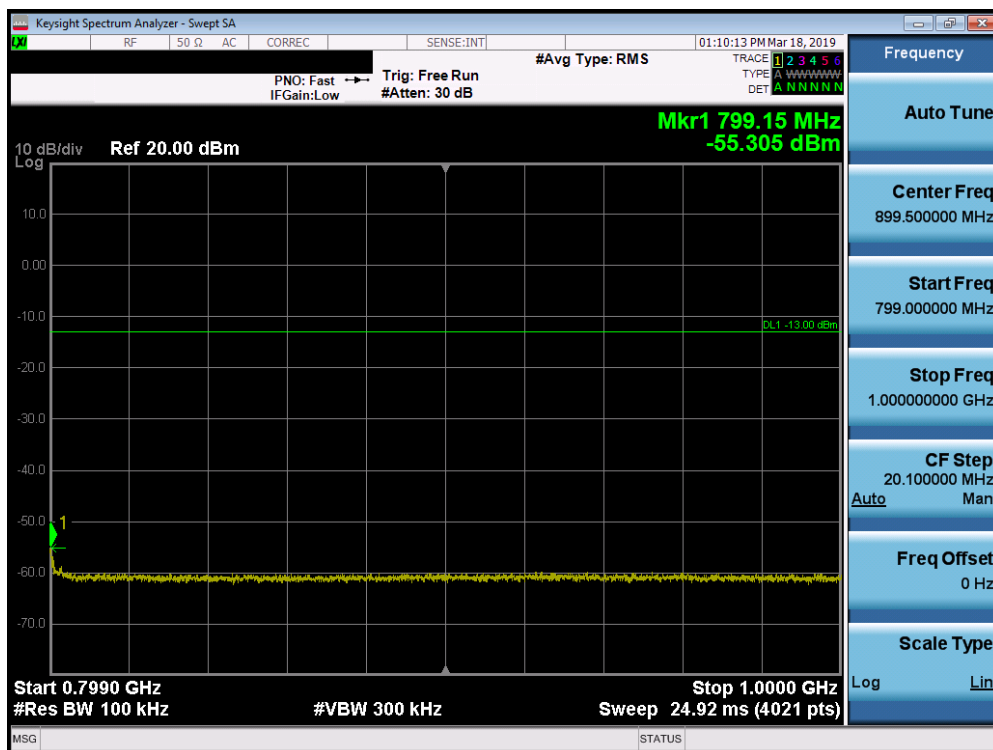

Plot 7-43. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 35 of 66

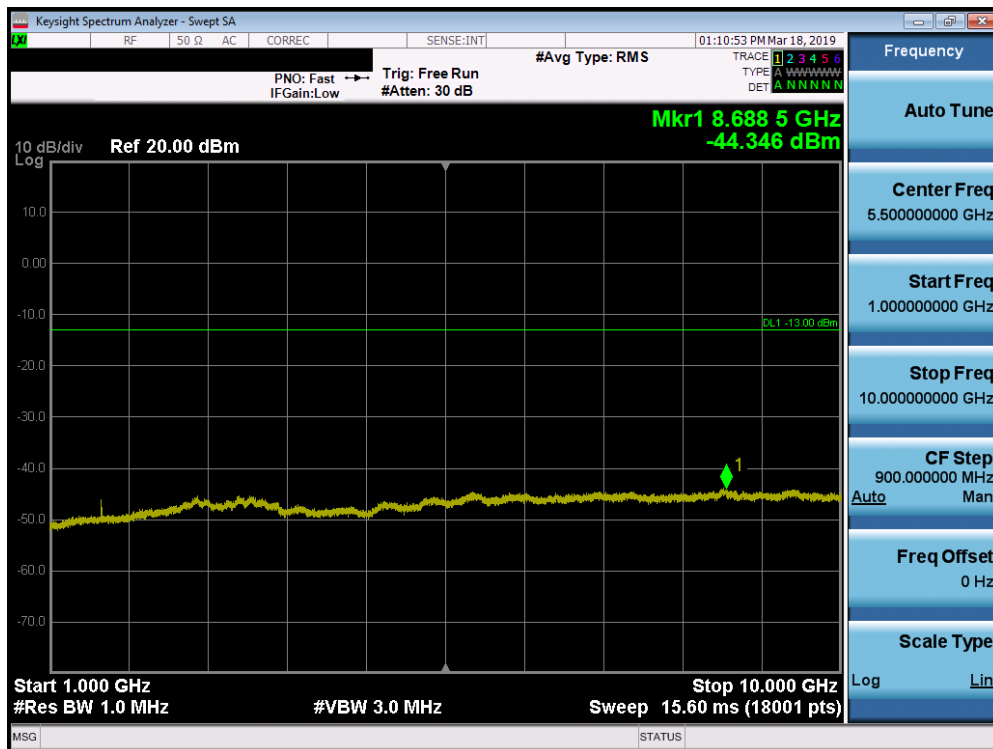

Plot 7-44. Conducted Spurious Plot (LTE Band 14, 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 36 of 66

7.4 Band Edge Emissions at Antenna Terminal

~~§2.1051~~ ~~§90.691~~ ~~§90.543~~

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + 10\log(P_{\text{Watts}})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10\log(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

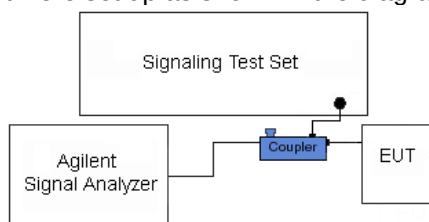



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 37 of 66

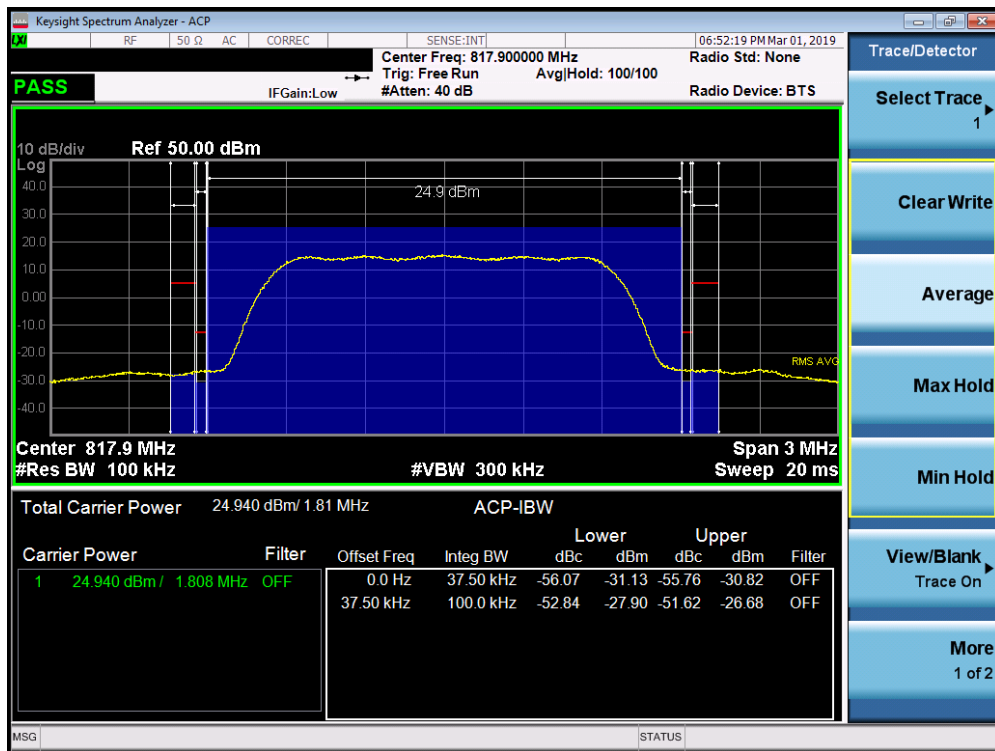


Plot 7-45. Channel Edge Plot (CDMA BC10 - Ch. 476)

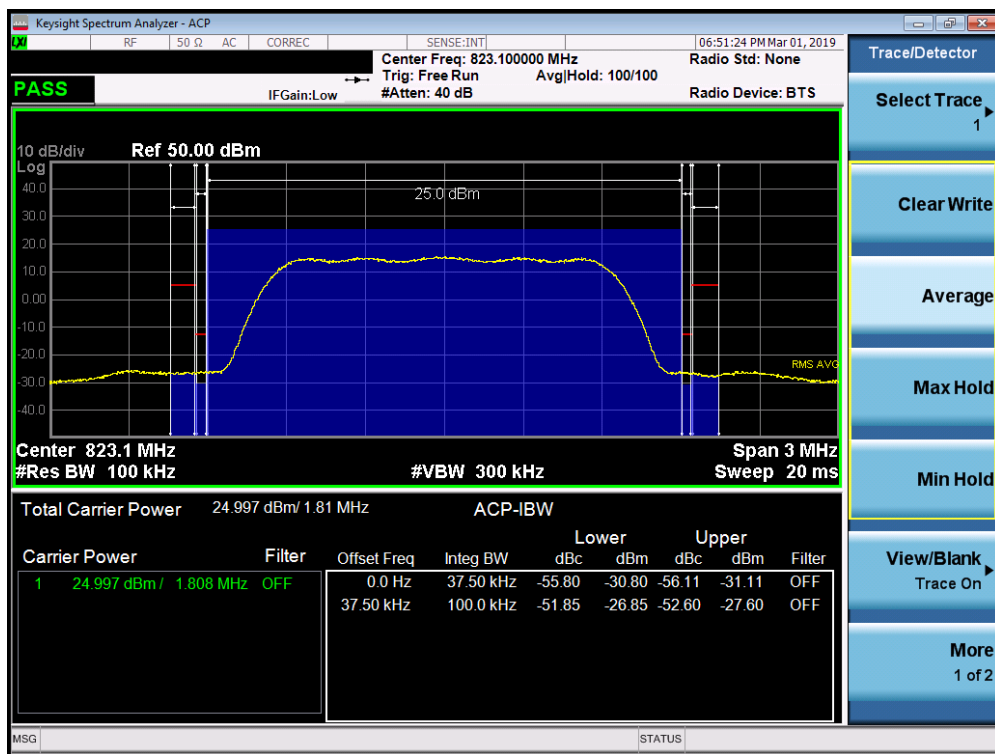


Plot 7-46. Channel Edge Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 38 of 66

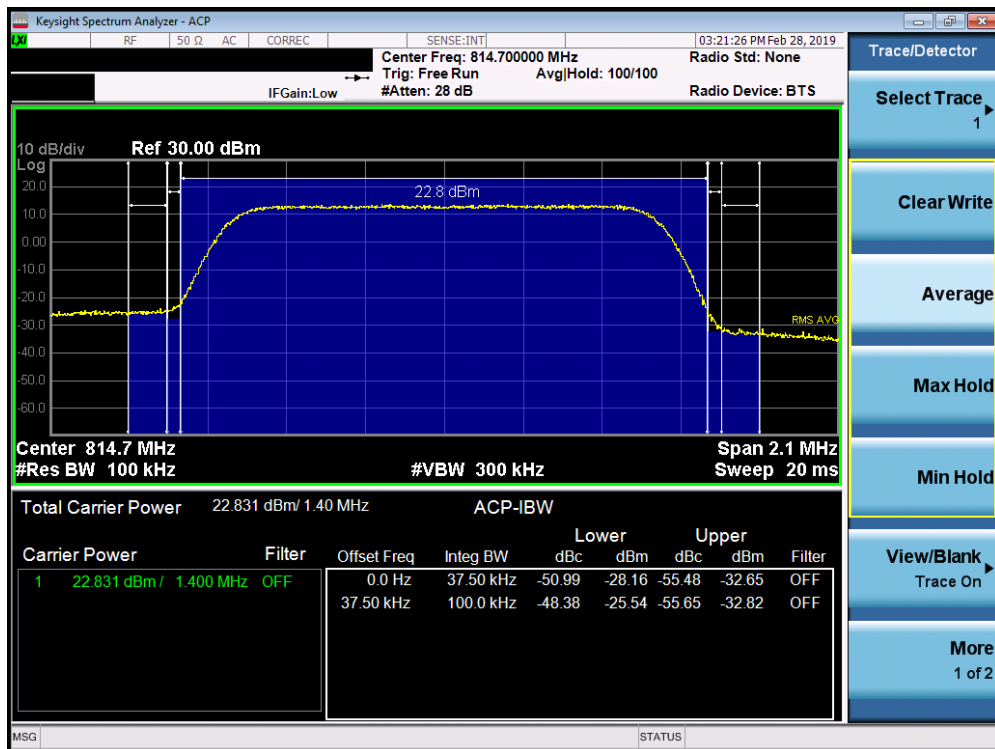


Plot 7-47. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK - RB Size 6- Low Channel)

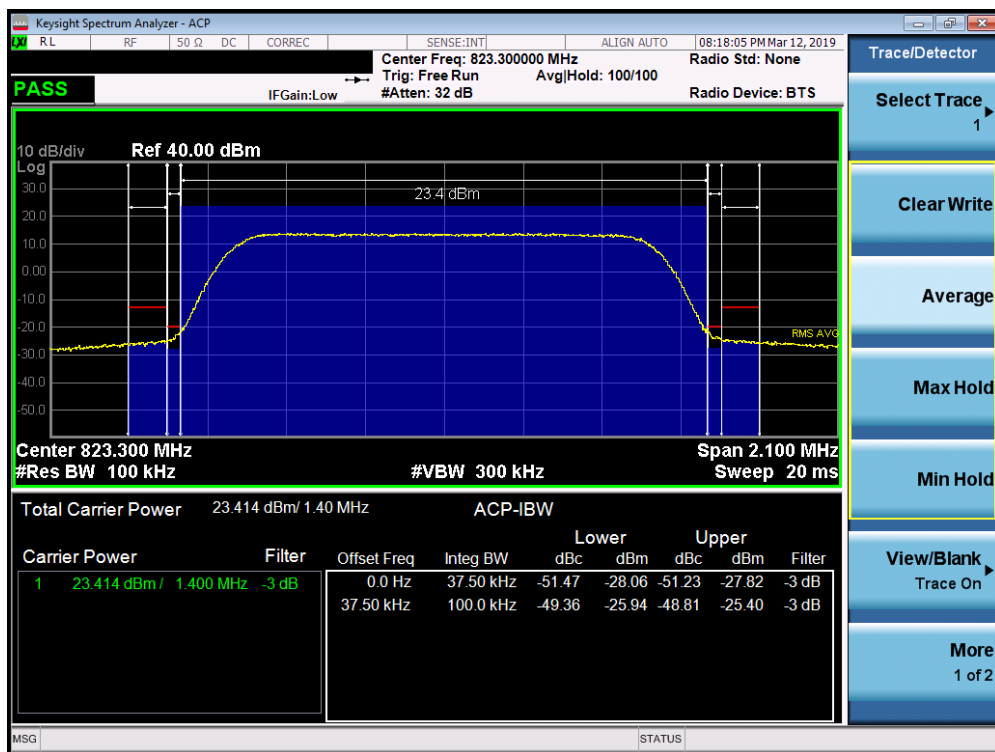


Plot 7-48. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK - RB Size 6 - High Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 39 of 66

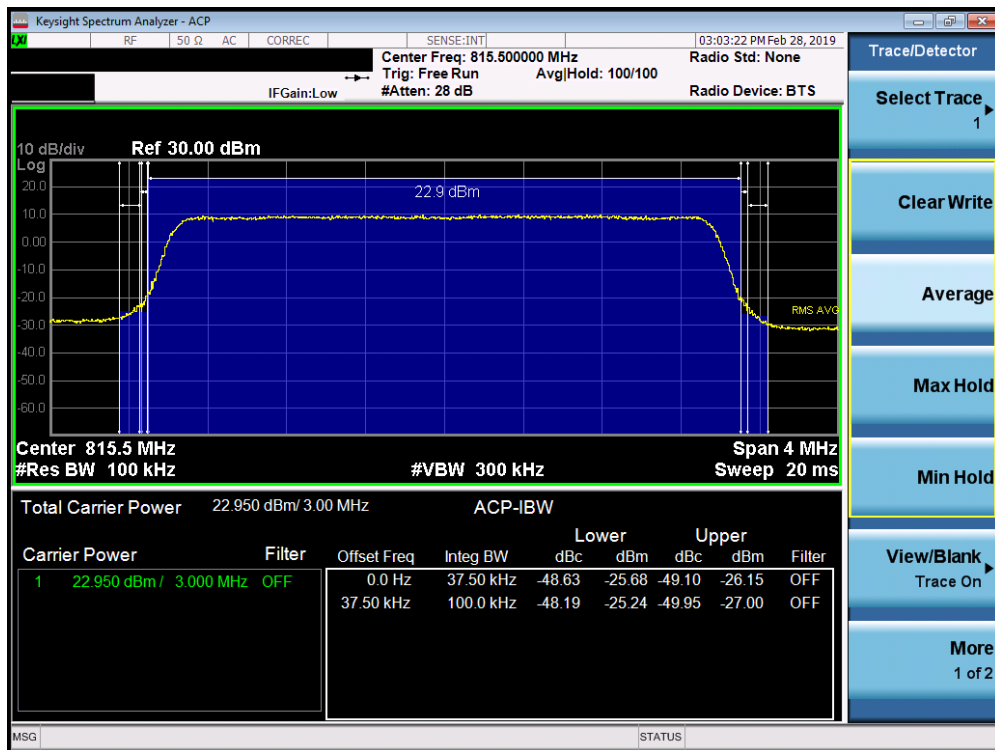


Plot 7-49. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15– Low Channel)

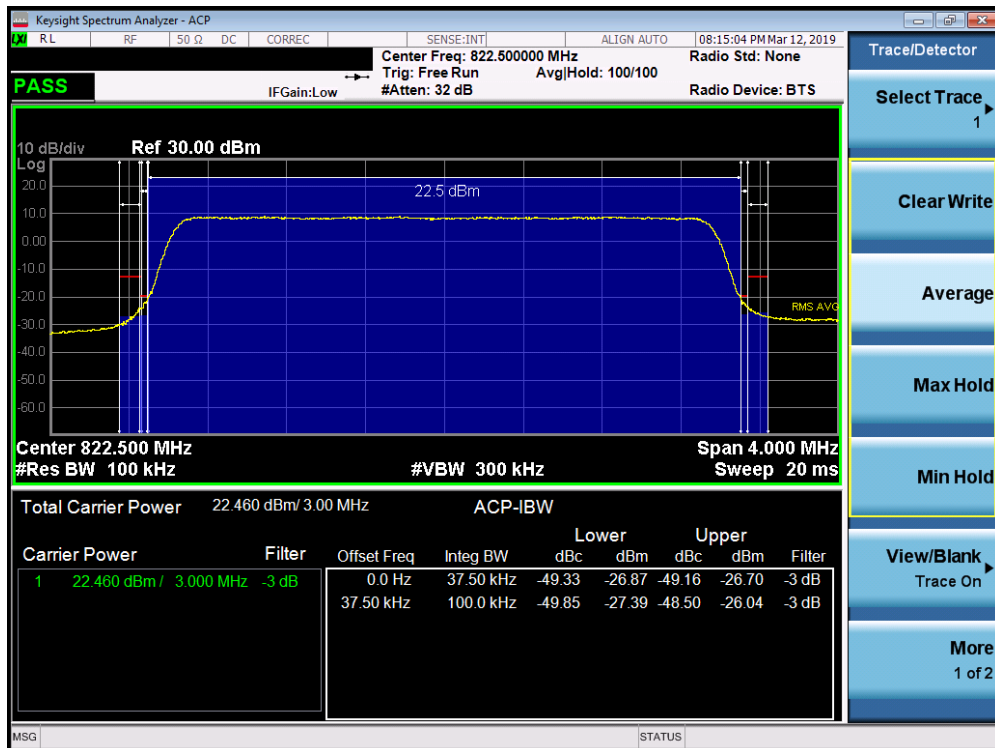


Plot 7-50. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15 – High Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 40 of 66

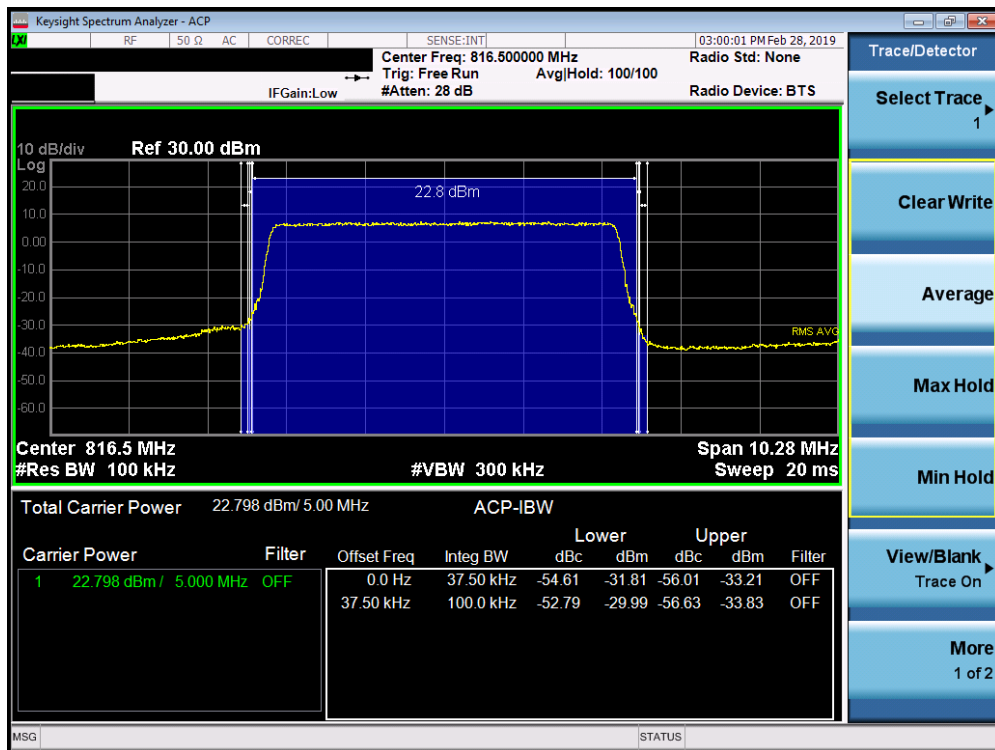


Plot 7-51. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

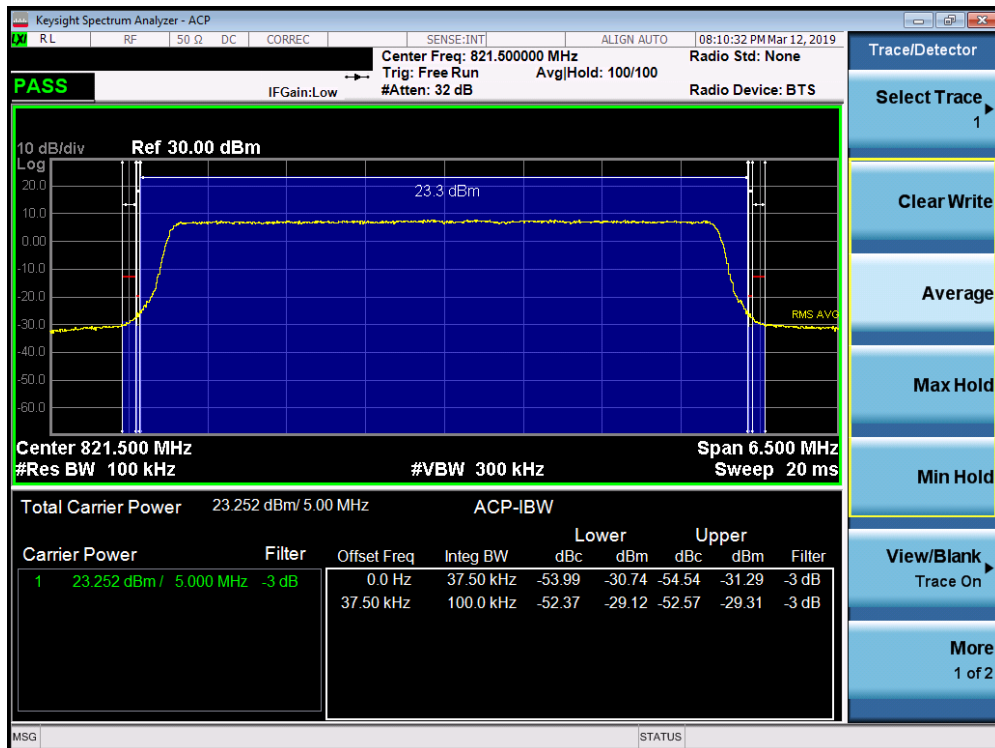


Plot 7-52. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25 – High Channel)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 41 of 66

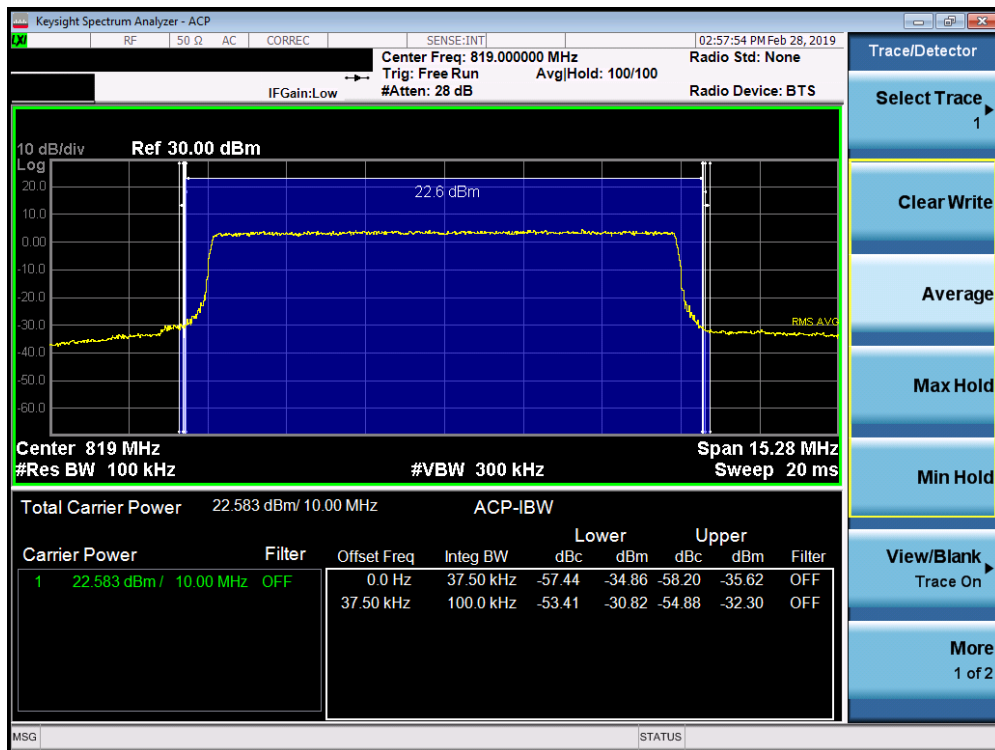


Plot 7-53. Channel Edge Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

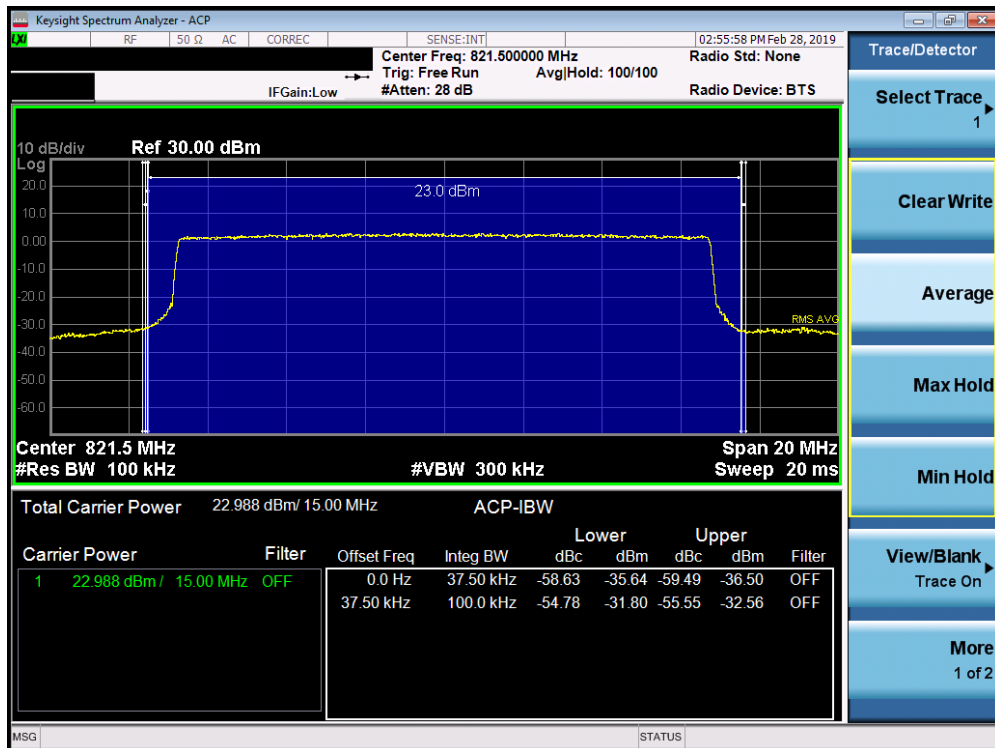


Plot 7-54. Channel Edge Plot (LTE Band 26, 15MHz QPSK – RB Size 75)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 42 of 66

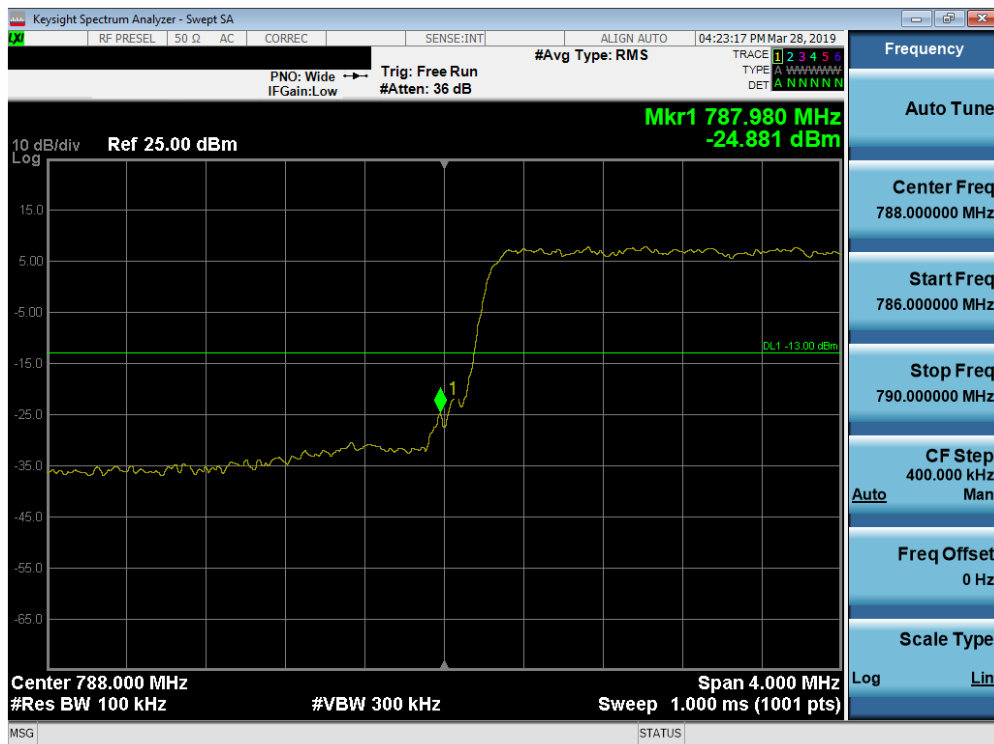


Plot 7-55. Lower Band Edge Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

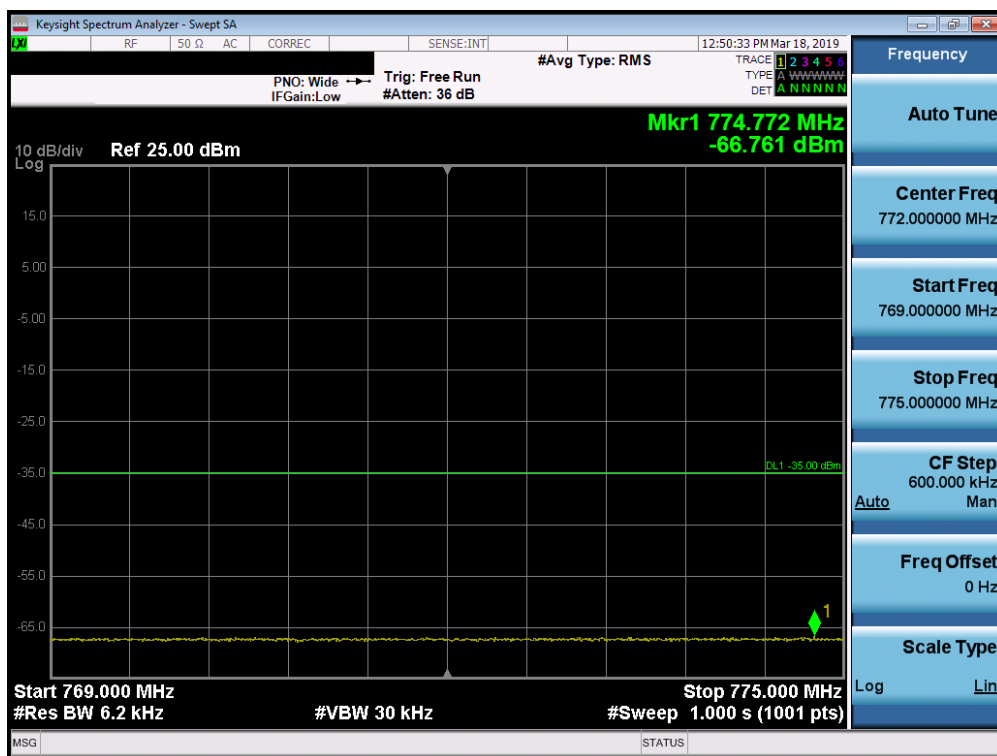

Plot 7-56. Lower Emission Mask Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

FCC ID: A3LSMF900U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 43 of 66	

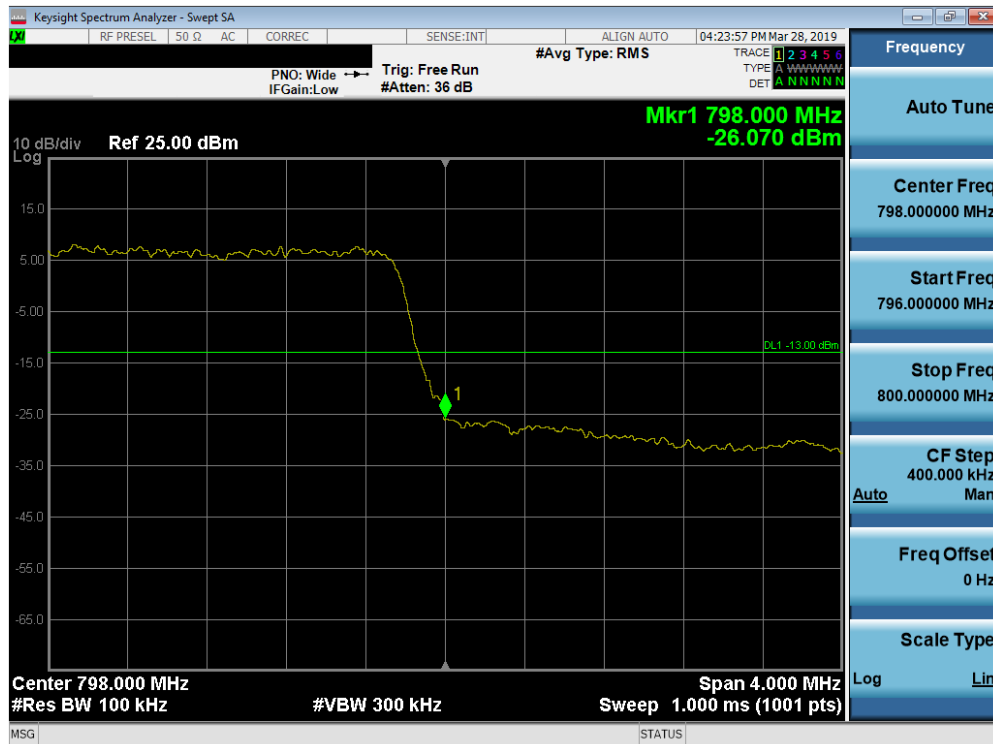


Plot 7-57. Upper Band Edge Plot (LTE Band 14, 5MHz QPSK - RB Size 25)




Plot 7-58. Upper Emission Mask Plot (LTE Band 14, 5MHz QPSK - RB Size 25)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 44 of 66

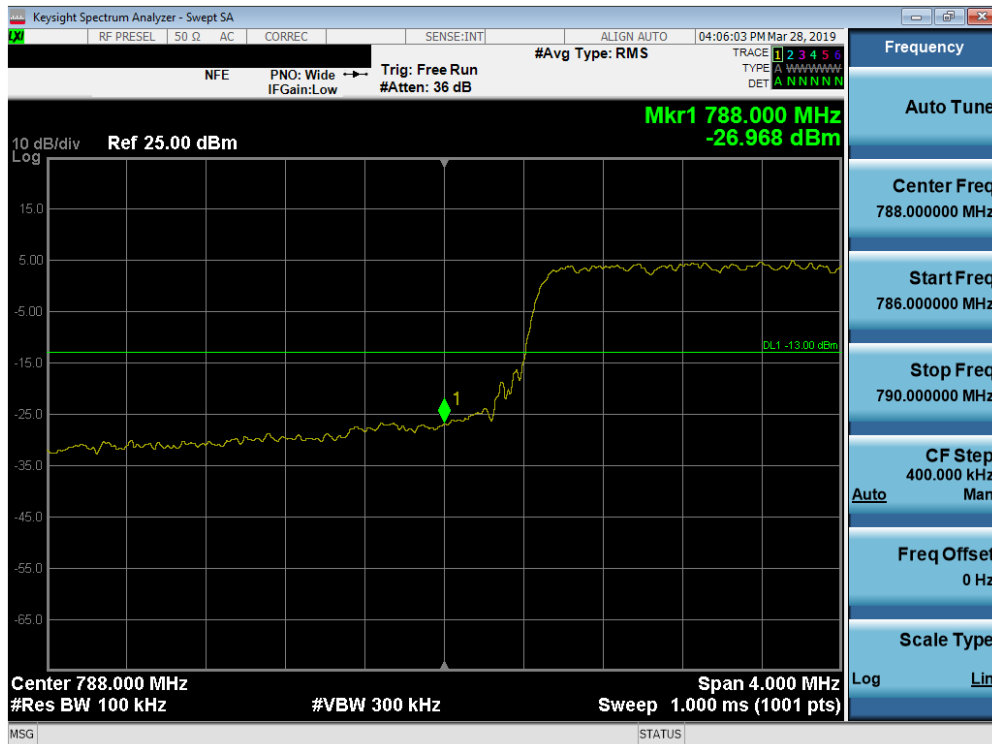


Plot 7-59. Lower Band Edge Plot (LTE Band 14, 10MHz QPSK - RB Size 50)

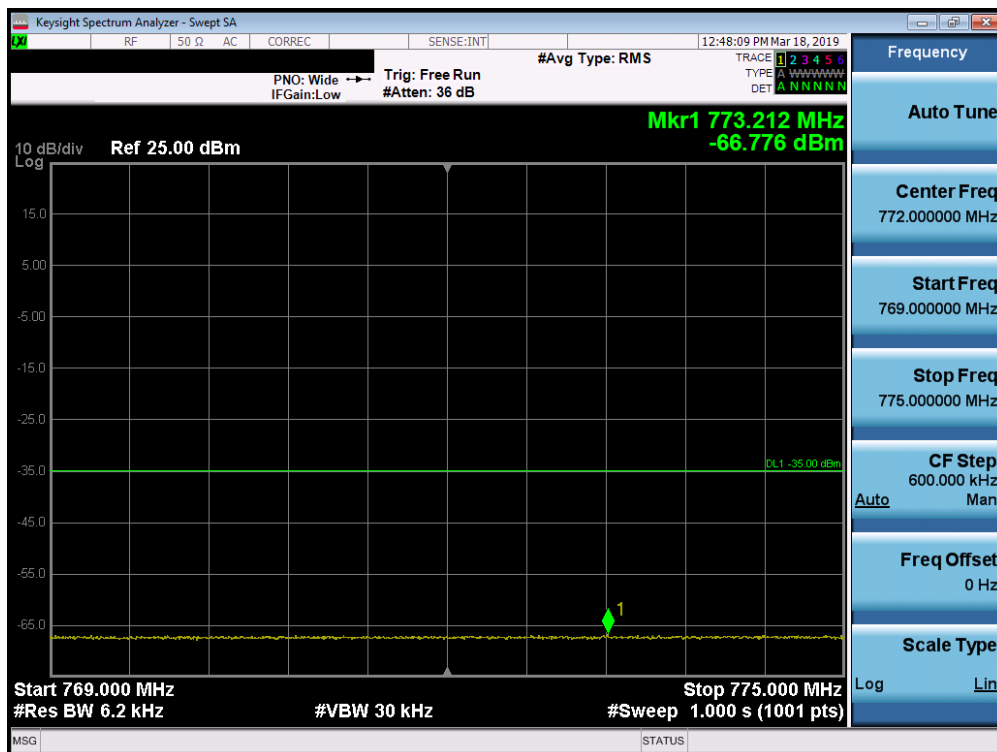

Plot 7-60. Lower Emission Mask Plot (LTE Band 14, 10MHz QPSK - RB Size 50)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 45 of 66

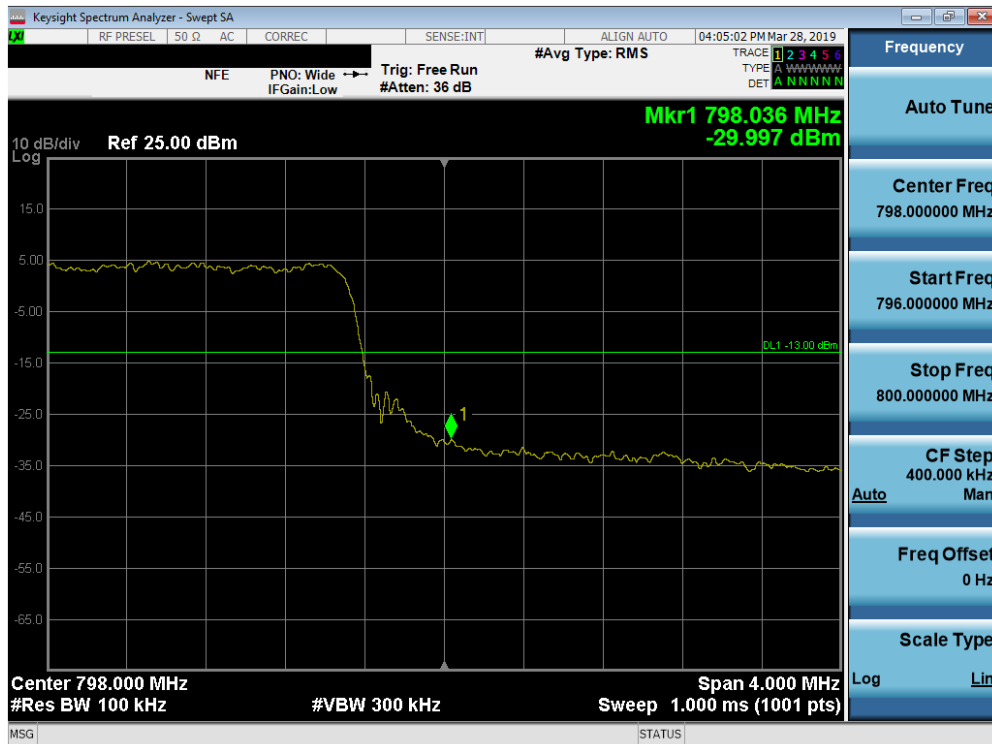

Plot 7-61. Upper Band Edge Plot (LTE Band 14, 10MHz QPSK - RB Size 50)



Plot 7-62. Upper Emission Mask Plot (LTE Band 14, 10MHz QPSK - RB Size 50)

FCC ID: A3LSMF900U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 46 of 66

7.5 Conducted Power Output Data

§2.1046 §90.635

Frequency [MHz]	BC10 [Channel]	Battery Type	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
817.90	476	Standard	24.94	0.312	50.00	-25.06
823.10	684	Standard	24.97	0.314	50.00	-25.03

Table 7-2. CDMA BC10 Conducted Power Output Data

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
814.70	1.4	QPSK	24.23	0.265	50.00	-25.77
823.30	1.4	QPSK	24.15	0.260	50.00	-25.85
814.70	1.4	16-QAM	23.59	0.229	50.00	-26.41
823.30	1.4	16-QAM	23.47	0.222	50.00	-26.53
814.70	1.4	64-QAM	22.47	0.177	50.00	-27.53
823.30	1.4	64-QAM	21.96	0.157	50.00	-28.04
815.50	3	QPSK	23.41	0.219	50.00	-26.59
822.50	3	QPSK	24.21	0.264	50.00	-25.79
815.50	3	16-QAM	22.58	0.181	50.00	-27.42
822.50	3	16-QAM	23.52	0.225	50.00	-26.48
815.50	3	64-QAM	22.38	0.173	50.00	-27.62
822.50	3	64-QAM	21.84	0.153	50.00	-28.16
816.50	5	QPSK	23.73	0.236	50.00	-26.27
821.50	5	QPSK	24.20	0.263	50.00	-25.80
816.50	5	16-QAM	22.98	0.199	50.00	-27.02
821.50	5	16-QAM	23.68	0.233	50.00	-26.32
816.50	5	64-QAM	22.54	0.179	50.00	-27.46
821.50	5	64-QAM	21.86	0.153	50.00	-28.14
819.00	10	QPSK	24.15	0.260	50.00	-25.85
819.00	10	16-QAM	23.44	0.221	50.00	-26.56
819.00	10	64-QAM	21.91	0.155	50.00	-28.09
821.50	15	QPSK	24.24	0.265	50.00	-25.76
821.50	15	16-QAM	23.51	0.224	50.00	-26.49
821.50	15	64-QAM	22.07	0.161	50.00	-27.93

Table 7-3. LTE Band 26 Conducted Power Output Data

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 47 of 66

NOTES:

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 48 of 66	

7.6 Radiated Power (ERP)

§22.913(a.2) §90.542

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 49 of 66	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

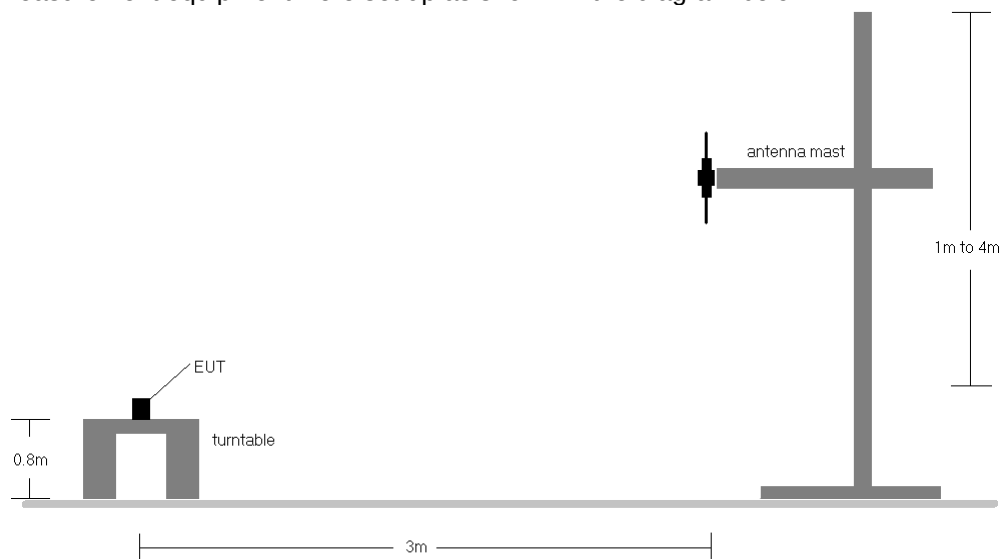


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 50 of 66

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	EUT Configuration	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
821.50	15	QPSK	Open	H	210	317	1 / 0	15.27	6.75	19.87	0.097	38.45	-18.59
821.50	15	16-QAM	Open	H	210	317	1 / 0	14.54	6.75	19.14	0.082	38.45	-19.32
821.50	15	64-QAM	Open	H	210	317	1 / 0	13.50	6.75	18.10	0.064	38.45	-20.36
821.50	15	QPSK	Open	V	203	267	1 / 0	13.07	6.75	17.67	0.058	38.45	-20.79
821.50	15 (WCP)	QPSK	Open	H	222	22	1 / 0	11.40	6.75	16.00	0.040	38.45	-22.46
821.50	15	QPSK	Closed	H	203	267	1 / 0	12.36	6.75	16.96	0.050	38.45	-21.50

Table 7-63. ERP Data (LTE Band 26)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	EUT Configuration	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
790.50	5	QPSK	Open	H	219	319	1 / 0	18.10	6.46	22.41	0.174	34.77	-12.36	24.56	0.286	36.99	-12.43
793.00	5	QPSK	Open	H	221	320	1 / 0	18.19	6.52	22.56	0.180	34.77	-12.21	24.71	0.296	36.99	-12.28
795.50	5	QPSK	Open	H	228	320	1 / 0	17.83	6.59	22.27	0.168	34.77	-12.51	24.42	0.276	36.99	-12.57
793.00	5	16-QAM	Open	H	221	320	1 / 0	17.45	6.52	21.82	0.152	34.77	-12.95	23.97	0.250	36.99	-13.02
793.00	5	64-QAM	Open	H	221	320	1 / 0	16.44	6.52	20.81	0.121	34.77	-13.96	22.96	0.198	36.99	-14.03
793.00	10	QPSK	Open	H	226	325	1 / 0	17.58	6.52	21.95	0.157	34.77	-12.82	24.10	0.257	36.99	-12.89
793.00	10	16-QAM	Open	H	226	325	1 / 0	16.86	6.52	21.23	0.133	34.77	-13.54	23.38	0.218	36.99	-13.61
793.00	10	64-QAM	Open	H	226	325	1 / 0	15.78	6.52	20.15	0.104	34.77	-14.62	22.30	0.170	36.99	-14.69
793.00	5	QPSK	Open	V	136	269	6.52	14.01	6.04	17.90	0.062	34.77	-16.88	20.05	0.101	36.99	-16.94
793.00	5 (WCP)	QPSK	Open	V	359	293	6.52	12.74	6.52	17.11	0.051	34.77	-17.66	19.26	0.084	36.99	-17.73
795.50	5	QPSK	Closed	H	228	320	1 / 0	16.09	6.59	20.53	0.113	34.77	-14.25	22.68	0.185	36.99	-14.31

Table 7-64. ERP Data (LTE Band 14)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 51 of 66

7.7 Radiated Spurious Emissions Measurements

§2.1053 §90.691 §90.543

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 52 of 66	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

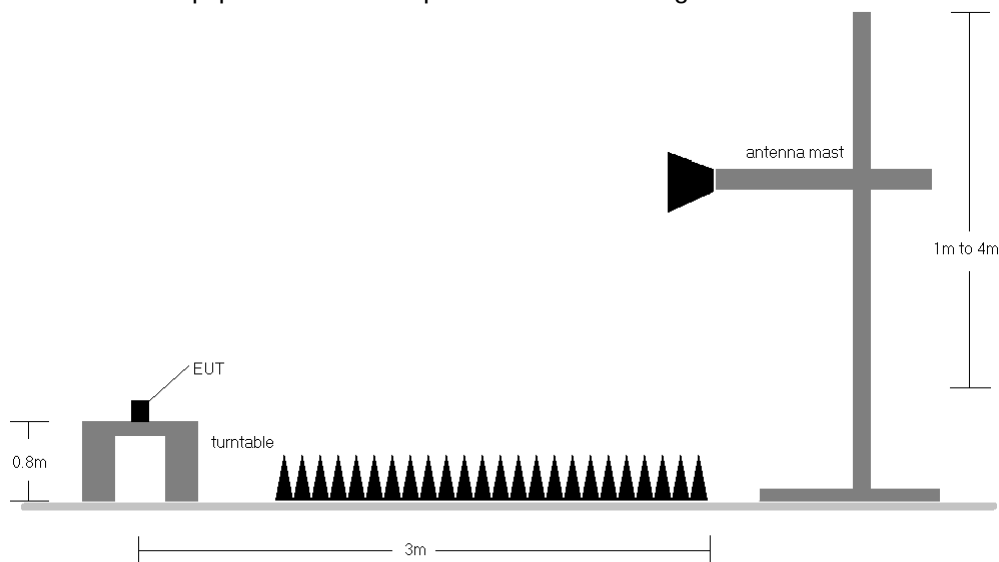


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
6. Per 90.543(f), emissions in the 1559 – 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals. These emission measurements are shown in this section below.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 53 of 66

OPERATING FREQUENCY: 817.90 MHz

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	H	-	-	-73.70	8.95	-64.75	-51.8
2453.70	H	-	-	-71.34	9.67	-61.67	-48.7

Table 7-4. CDMA BC10 Radiated Spurious Data (Ch. 476 - OPEN)

OPERATING FREQUENCY: 823.10 MHz

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	-	-	-73.55	8.96	-64.59	-51.6
2469.30	H	-	-	-71.35	9.69	-61.66	-48.7

Table 7-5. CDMA BC10 Radiated Spurious Data (Ch. 684 - OPEN)

OPERATING FREQUENCY: 823.10 MHz

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	-	-	-74.16	8.96	-65.20	-52.2
2469.30	H	-	-	-72.49	9.69	-62.80	-49.8

Table 7-6. CDMA BC10 Radiated Spurious Data with WCP (Ch. 684 - OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04-A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 54 of 66

OPERATING FREQUENCY: 814.70 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	H	-	-	-73.33	8.95	-64.38	-51.4
2444.10	H	-	-	-71.24	9.67	-61.57	-48.6

Table 7-7. Radiated Spurious Data (LTE Band 26 – Low Channel - OPEN)

OPERATING FREQUENCY: 823.30 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	-	-	-73.00	8.96	-64.04	-51.0
2469.90	H	-	-	-70.85	9.69	-61.16	-48.2

Table 7-8. Radiated Spurious Data (LTE Band 26 – High Channel - OPEN)

OPERATING FREQUENCY: 814.70 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	-	-	-73.45	8.95	-64.50	-51.5
2469.90	H	-	-	-71.53	9.67	-61.86	-48.9

Table 7-9. Radiated Spurious Data with WCP (LTE Band 26 – High Channel - OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 55 of 66

OPERATING FREQUENCY: 790.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2371.50	H	-	-	-66.18	9.48	-56.70	-43.7
3162.00	H	-	-	-63.74	9.36	-54.38	-41.4
3952.50	H	-	-	-63.44	9.37	-54.07	-41.1

Table 7-10. Radiated Spurious Data (LTE Band 14 – Low Channel - OPEN)

OPERATING FREQUENCY: 793.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	H	-	-	-66.89	9.48	-57.41	-44.4
3172.00	H	-	-	-64.33	9.36	-54.97	-42.0
3965.00	H	-	-	-63.57	9.37	-54.20	-41.2

Table 7-11. Radiated Spurious Data (LTE Band 14 – Mid Channel - OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 56 of 66

OPERATING FREQUENCY: 795.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2386.50	H	-	-	-65.93	9.47	-56.46	-43.5
3182.00	H	-	-	-63.67	9.35	-54.32	-41.3
3977.50	H	-	-	-63.22	9.35	-53.87	-40.9

Table 7-12. Radiated Spurious Data (LTE Band 14 – High Channel - OPEN)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	-	-	-65.52	8.51	-57.01	-17.0
1586.00	H	-	-	-65.54	8.53	-57.01	-17.0
1591.00	H	-	-	-66.14	8.53	-57.61	-17.6

Table 7-13. Radiated Spurious Data (LTE Band 14 – Wide Band - OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 57 of 66

OPERATING FREQUENCY: 793.00 MHz

MODULATION SIGNAL: QPSK

BANDWIDTH: 5.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	H	-	-	-62.54	9.48	-53.06	-40.1
3172.00	H	-	-	-60.13	9.36	-50.77	-37.8

Table 7-14. Radiated Spurious Data with WCP (LTE Band 14 - Ch. Mid Channel - OPEN)

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset		Page 58 of 66

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 59 of 66	

Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 817,900,000 Hz
 CHANNEL: 476
 REFERENCE VOLTAGE: 4.27 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %		- 30	817,899,970	-30	-0.0000037
100 %		- 20	817,899,640	-360	-0.0000440
100 %		- 10	817,899,983	-17	-0.0000021
100 %		0	817,900,174	174	0.0000213
100 %		+ 10	817,900,391	391	0.0000478
100 %		+ 20	817,899,668	-332	-0.0000406
100 %		+ 30	817,899,981	-19	-0.0000023
100 %		+ 40	817,899,728	-272	-0.0000333
100 %		+ 50	817,899,996	-4	-0.0000005
BATT. ENDPOINT	3.45	+ 20	817,899,982	-18	-0.0000022

Table 7-15. CDMA BC10 Frequency Stability Data

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 60 of 66	

Frequency Stability / Temperature Variation

§2.1055, §90.213

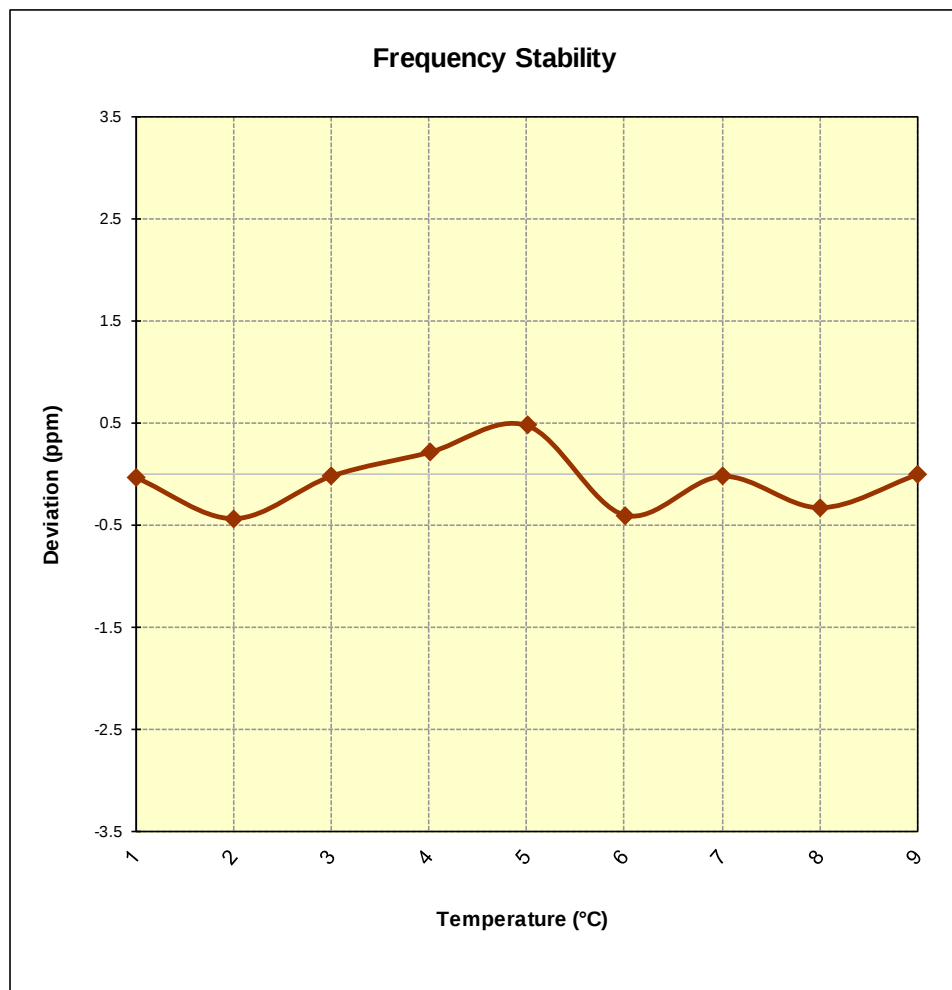


Figure 7-6. CDMA BC10 Frequency Stability Graph

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 61 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 819,000,000 Hz
 CHANNEL: 26740
 REFERENCE VOLTAGE: 4.27 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %		- 30	818,999,685	-315	-0.0000385
100 %		- 20	819,000,159	159	0.0000194
100 %		- 10	819,000,426	426	0.0000520
100 %		0	819,000,244	244	0.0000298
100 %		+ 10	818,999,989	-11	-0.0000013
100 %		+ 20	819,000,308	308	0.0000376
100 %		+ 30	818,999,784	-216	-0.0000264
100 %		+ 40	819,000,097	97	0.0000118
100 %		+ 50	818,999,838	-162	-0.0000198
BATT. ENDPOINT	3.45	+ 20	818,999,946	-54	-0.0000066

Table 7-16. LTE Band 26 Frequency Stability Data

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 62 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

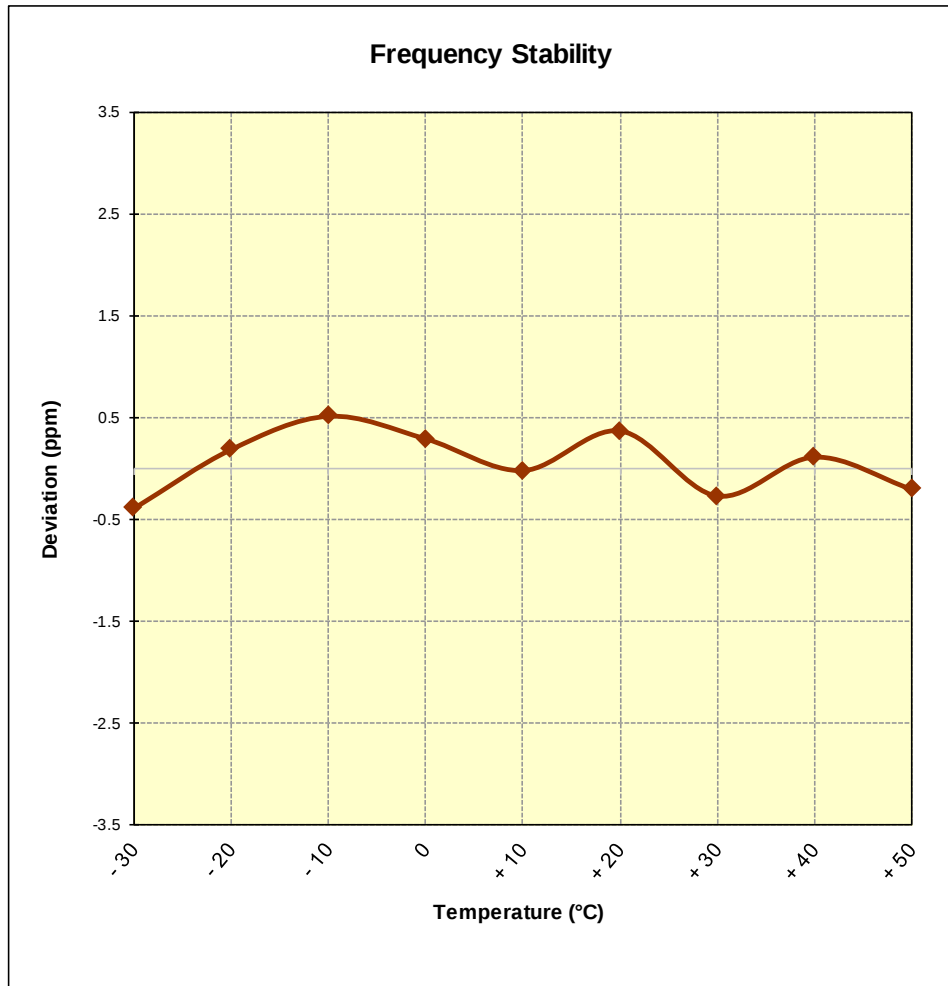


Table 7-17. LTE Band 26 Frequency Stability Data

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 63 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 793,000,000 Hz
 CHANNEL: 23330
 REFERENCE VOLTAGE: 4.27 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.27	- 30	793,000,009	9	0.0000011
100 %		- 20	793,000,405	405	0.0000511
100 %		- 10	793,000,163	163	0.0000206
100 %		0	793,000,023	23	0.0000029
100 %		+ 10	793,000,105	105	0.0000132
100 %		+ 20	792,999,950	-50	-0.0000063
100 %		+ 30	792,999,842	-158	-0.0000199
100 %		+ 40	792,999,967	-33	-0.0000042
100 %		+ 50	792,999,727	-273	-0.0000344
BATT. ENDPOINT	3.45	+ 20	793,000,056	56	0.0000071

Table 7-18. LTE Band 14 Frequency Stability Data

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 64 of 66

Frequency Stability / Temperature Variation

§2.1055, §90.213

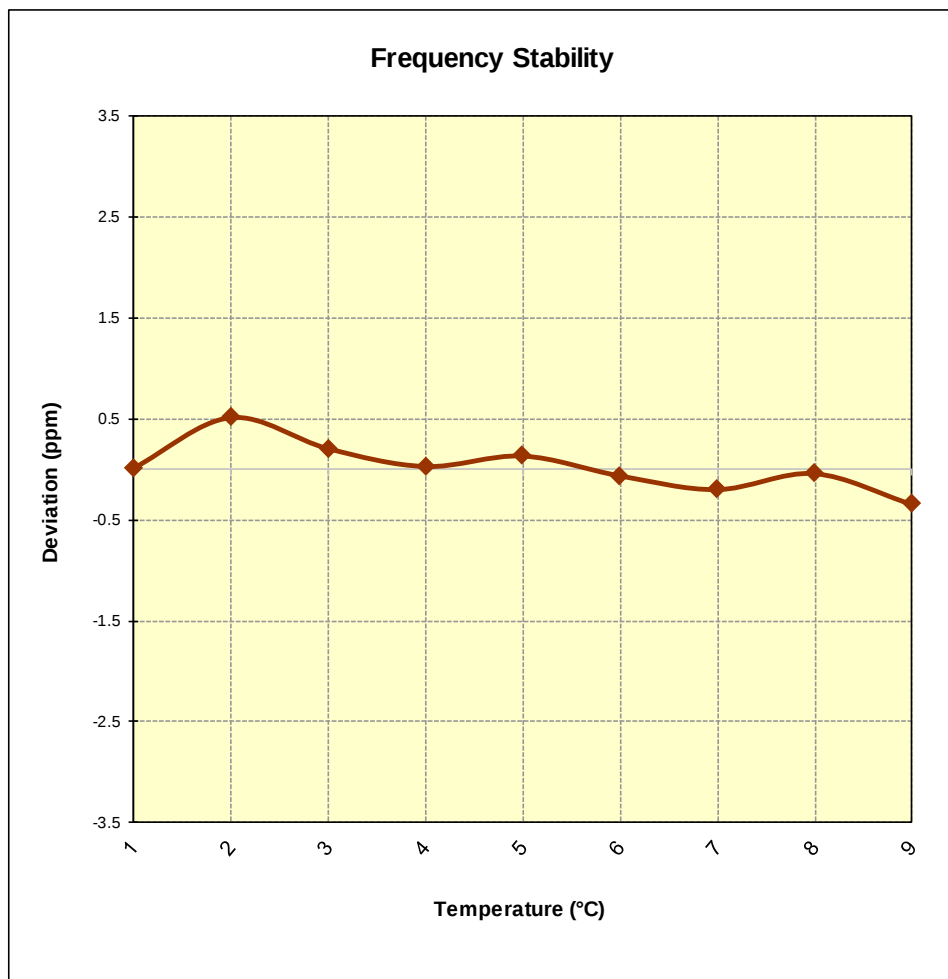


Table 7-19. LTE Band 14 Frequency Stability Data

FCC ID: A3LSMF900U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 65 of 66

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF900U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: A3LSMF900U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1901160007-04.A3L	Test Dates: 01/22 - 03/29/2019	EUT Type: Portable Handset	Page 66 of 66	