

MEASUREMENT REPORT

FCC Part 30 5G mmWave

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

03/26 – 06/03/2021

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2104020031-08.A3L

FCC ID:

A3LSMF926U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F926U

Additional Models:

SM-F926U1

EUT Type:

Portable Handset

FCC Classification:

Part 30 Mobile Transmitter (5GM)

FCC Rule Part(s):


30

Test Procedure(s):

ANSI C63.26-2015, KDB 971168 D01 v03r01,
KDB 842590 D01 v01r02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 1 of 110

T A B L E O F C O N T E N T S


1.0	INTRODUCTION	5
1.1	Scope	5
1.2	PCTEST Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Measurement Procedure.....	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary	12
7.2	Occupied Bandwidth	13
7.3	Equivalent Isotropic Radiated Power.....	32
7.4	Radiated Spurious and Harmonic Emissions	40
7.5	Band Edge Emissions	72
7.6	Frequency Stability / Temperature Variation	90
8.0	CONCLUSION.....	95
9.0	APPENDIX A	96
9.1	VDI Mixer Verification Certificate.....	96
9.2	Test Scope Accreditation	98

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 2 of 110



MEASUREMENT REPORT

FCC Part 30



Band	Antenna	Bandwidth [MHz]	Tx Frequency [MHz]	CCs Active	Mode	Modulation	EIRP		Emission Designator
							Max Power [W]	Max Power [dBm]	
n261	J-Patch	100	27550 - 28300	1	SISO	QPSK	1.178	30.71	94M0G7D
					2Tx	QPSK	0.817	29.12	94M0G7D
					SISO	$\pi/2$ BPSK	1.153	30.62	93M8G7D
					SISO	16QAM	0.834	29.21	94M1W7D
				2	SISO	64QAM	0.532	27.26	94M1W7D
					SISO	QPSK	0.246	23.91	191MG7D
					SISO	$\pi/2$ BPSK	0.244	23.88	189MG7D
					SISO	16QAM	0.168	22.25	191MW7D
		50	27525 - 28325	1	SISO	64QAM	0.104	20.16	192MW7D
					SISO	QPSK	1.054	30.23	45M7G7D
					2Tx	QPSK	0.955	29.80	45M7G7D
					SISO	$\pi/2$ BPSK	1.005	30.02	45M6G7D
				2	SISO	16QAM	0.755	28.78	45M5W7D
					SISO	64QAM	0.481	26.82	45M6W7D
					SISO	QPSK	0.236	23.73	95M0G7D
					SISO	$\pi/2$ BPSK	0.265	24.24	94M9G7D
n261	K-Patch	100	27550 - 28300	1	SISO	16QAM	0.201	23.03	94M5W7D
					SISO	64QAM	0.155	21.91	94M9W7D
				2	SISO	QPSK	0.333	25.22	-
					2Tx	QPSK	0.436	26.39	-
					2Tx	$\pi/2$ BPSK	0.459	26.62	-
					2Tx	16QAM	0.268	24.28	-
		50	27525 - 28325	1	2Tx	64QAM	0.185	22.68	-
					2Tx	QPSK	0.143	21.57	-
					2Tx	$\pi/2$ BPSK	0.139	21.43	-
					2Tx	16QAM	0.100	20.02	-
				2	2Tx	64QAM	0.071	18.53	-
					SISO	QPSK	0.350	25.44	-
					2Tx	QPSK	0.466	26.68	-
					2Tx	$\pi/2$ BPSK	0.444	26.47	-
					2Tx	16QAM	0.267	24.26	-
				2	2Tx	64QAM	0.191	22.82	-
					2Tx	QPSK	0.131	21.18	-
					2Tx	$\pi/2$ BPSK	0.131	21.16	-
					2Tx	16QAM	0.091	19.60	-
					2Tx	64QAM	0.052	17.20	-

EUT Overview (Band n261)

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 3 of 110

Band	Antenna	Bandwidth [MHz]	Tx Frequency [MHz]	CCs Active	Mode	Modulation	EIRP		Emission Designator
							Max Power [W]	Max Power [dBm]	
n260	J-Patch	100	37050 - 39950	1	SISO	QPSK	0.560	27.49	93M3G7D
					2Tx	QPSK	0.660	28.20	93M3G7D
					2Tx	$\pi/2$ BPSK	0.562	27.50	90M5G7D
					2Tx	16QAM	0.433	26.37	92M7W7D
					2Tx	64QAM	0.212	23.27	92M5W7D
				2	2Tx	QPSK	0.195	22.90	191MG7D
					2Tx	$\pi/2$ BPSK	0.193	22.86	190MG7D
					2Tx	16QAM	0.139	21.45	191MW7D
					2Tx	64QAM	0.102	20.11	191MW7D
					2Tx	64QAM	0.102	20.11	191MW7D
		50	37025 - 39975	1	SISO	QPSK	0.544	27.36	45M8G7D
					2Tx	QPSK	0.616	27.90	45M8G7D
					2Tx	$\pi/2$ BPSK	0.560	27.49	45M6G7D
					2Tx	16QAM	0.432	26.36	45M6W7D
					2Tx	64QAM	0.212	23.26	45M8W7D
				2	2Tx	QPSK	0.174	22.40	94M8G7D
					2Tx	$\pi/2$ BPSK	0.176	22.46	94M9G7D
					2Tx	16QAM	0.115	20.63	94M8W7D
					2Tx	64QAM	0.083	19.21	94M4W7D
					2Tx	64QAM	0.083	19.21	94M4W7D
n260	K-Patch	100	37050 - 39950	1	SISO	QPSK	0.567	27.54	-
					2Tx	QPSK	0.494	26.94	-
					SISO	$\pi/2$ BPSK	0.559	27.48	-
					SISO	16QAM	0.411	26.14	-
					SISO	64QAM	0.252	24.02	-
				2	SISO	QPSK	0.219	23.40	-
					SISO	$\pi/2$ BPSK	0.223	23.49	-
					SISO	16QAM	0.167	22.24	-
					SISO	64QAM	0.096	19.82	-
					SISO	64QAM	0.096	19.82	-
		50	37025 - 39975	1	SISO	QPSK	0.558	27.47	-
					2Tx	QPSK	0.505	27.03	-
					SISO	$\pi/2$ BPSK	0.545	27.37	-
					SISO	16QAM	0.395	25.97	-
					SISO	64QAM	0.254	24.06	-
				2	SISO	QPSK	0.213	23.28	-
					SISO	$\pi/2$ BPSK	0.218	23.38	-
					SISO	16QAM	0.162	22.10	-
					SISO	64QAM	0.090	19.55	-

EUT Overview (Band n260)

Note: Due to similar antenna performance from the antennas after thorough investigation, the Occupied Bandwidth was only measured on one antenna for each band.

FCC ID: A3LSMF926U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	
			Page 4 of 110

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 5 of 110

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF926U**. The test data contained in this report pertains only to the emissions due to the EUT's 5G mmWave function.

The EUT contains two patch antennas, referred to herein as Ant1 (J-Patch) and Ant2 (K-Patch). Each of the antennas is comprised of two separate antenna feeds - one for horizontal and one for vertical polarization. Only one array antenna can be active at a time.

The EUT supports up to 2CC for UL. For each CC, the EUT supports both 50MHz bandwidth and 100MHz bandwidth. The EUT supports a subcarrier spacing (SCS) of 120kHz with two transmission schemes, CP-OFDM and DFT-s-OFDM, with pi/2-BPSK, QPSK, 16-QAM, and 64-QAM modulations. Different Beam IDs are supported, each corresponding to a different position in space for each antenna. During testing, FTM (Factory Test Mode) was used to operate the transmitter. MIMO operation was achieved by enabling two Beam IDs at the same time: one is from the list of H Beam IDs and other is from the list of V Beam IDs.

Antenna	Name
Ant1	J-Patch
Ant2	K-Patch

Test Device Serial No.: 0218M, 0306M

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

2.3 Test Configuration

The EUT was tested per the guidance of KDB 842590 D01 v01r02 and ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated tests.

EIRP Simulation data for all Beam IDs was used to determine the worst case Beam ID for SISO operation and Beam ID pair for 2Tx (DFT-s-OFDM) and MIMO (CP-OFDM) operation. These Beam ID's were used for final measurements.

This device supports two configurations: one is with screen open and one is with screen closed. Both configurations are tested, and the worst case radiated emissions data is shown in this report.

All testing was performed using FTM (Factory Test Mode) software at continuous Tx operation. When implemented out in the field, the EUT will operate with a maximum uplink configuration as allowed by the 5G network/carrier. The FTM software was also used for the EUT operation in the EN-DC mode.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 6 of 110

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015) and the guidance provided in KDB 842590 D01 v01r02 were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§30.202, §30.203

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary for radiated emissions measurements in the spurious domain. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m for measurements above 1GHz.

Radiated power (EIRP) measurements were performed in a full anechoic chamber (FAC) conforming to the site validation requirements of CISPR 16-1-4. Radiated spurious emission measurements from 30MHz - 18GHz were performed in a semi anechoic chamber (SAC) conforming to the site validation requirements of CISPR 16-1-4. A positioner was used to manipulate the EUT through several positions in space by rotating about the roll axis as shown in the figure below. The positioner was mounted on top of a turntable bringing the total EUT height to 1.5m.

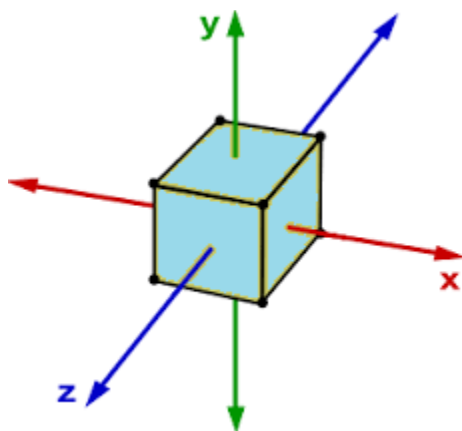


Figure 3-1. Rotation of the EUT Through Three Orthogonal Planes

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 7 of 110

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable. The measurement antenna is in the far field of the EUT per formula $2D^2/\lambda$ where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Frequency Range (GHz)	Wavelength(cm)	Far Field Distance (m)	Measurement Distance (m)
18-40	0.749	0.54	1.00
40-60	0.500	1.39	1.50
60-90	0.333	0.91	1.00
90-140	0.214	0.58	1.00
140-200	0.150	0.39	1.00

Table 3-1. Far-Field Distance & Measurement Distance per Frequency Range

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning. It was determined that H=0 degree and V=90 degree are the worst case positions when the EUT was transmitting horizontally and vertically polarized beams, respectively.

The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration bandwidth set to the emissions' occupied bandwidth. The EIRP is calculated from the raw power level measured with the spectrum analyzer using the formulas shown below.

Effective Isotropic Radiated Power Sample Calculation

The measured e.i.r.p is converted to E-field in V/m. Then, the distance correction is applied before converting back to calculated e.i.r.p, as explained in KDB 971168 D01.

$$\begin{aligned}
 \text{Field Strength [dB}\mu\text{V/m]} &= \text{Measured Value [dBm]} + \text{AFCL [dB/m]} + 107 \\
 &= -32.74 \text{ dBm} + (40.7 \text{ dB/m} + 8.78 \text{ dB}) + 107 = 123.74 \text{ dB}\mu\text{V/m} \\
 &= 10^{(123.74/20)/1000000} = 1.54 \text{ V/m} \\
 \text{e.i.r.p. [dBm]} &= 10 * \log((\text{E-Field} * D_m)^2/30) + 30 \text{ dB} \\
 &= 10 * \log((1.54 \text{ V/m} * 1.00 \text{ m})^2/30) + 30 \text{ dB} \\
 &= 18.98 \text{ dBm e.i.r.p.}
 \end{aligned}$$

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 8 of 110

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF926U	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 9 of 110

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to an accredited ISO/IEC 17025 calibration facility. Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	8/27/2020	Biennial	8/27/2022	17620
ETS-Lindgren	3116C	DRG Horn Antenna	5/11/2021	Biennial	5/11/2023	218893
Keysight Technologies	N9030A	50GHz PXA Signal Analyzer	1/20/2021	Annual	1/20/2022	US51350301
Megaphase	FAC mmWave	AP FAC mmWave 40GHz	3/3/2021	Annual	3/3/2022	20033003
Narda	180-442-KF	Wide Band Horn Antenna 18.0 - 40.0 GHz	9/14/2020	Annual	9/14/2021	2172481
OML Inc.	M05RH	WR-05 Horn Antenna, 24dBi, 140 to 220 GHz	10/31/2019	Biennial	10/31/2021	18073001
OML Inc.	M08RH	WR-08 Horn Antenna, 24dBi, 90 to 140 GHz	12/30/2018	Biennial	6/30/2021	18073001
OML Inc.	M12RH	WR-12 Horn Antenna, 24dBi, 60 to 90 GHz	12/30/2018	Biennial	6/30/2021	18073001
OML Inc.	M19RH	WR-19 Horn Antenna, 24dBi, 40 to 60 GHz	12/30/2018	Biennial	6/30/2021	18073001
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Virginia Diodes Inc	SAX679	SAX Module (40 - 60GHz)	8/28/2020	Annual	8/28/2021	SAX679
Virginia Diodes Inc	SAX680	SAX Module (60 - 90GHz)	8/14/2020	Annual	8/14/2021	SAX680
Virginia Diodes Inc	SAX681	SAX Module (90 - 140GHz)	10/22/2020	Annual	10/22/2021	SAX681
Virginia Diodes Inc	SAX682	SAX Module (140 - 220GHz)	9/24/2020	Annual	9/24/2021	SAX682
UTiFlex	UTiFlex	FAC mmWave UTiFlex 40GHz	3/3/2021	Annual	3/3/2022	234142-001

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 10 of 110

6.0 SAMPLE CALCULATIONS

Emission Designator

$\pi/2$ BPSK/ QPSK Modulation

Emission Designator = 800MG7D

BW = 800 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 802MW7D

BW = 802 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 11 of 110

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF926U
 FCC Classification: Part 30 Mobile Transmitter (5GM)
 Mode(s): TDD

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	RADIATED	PASS	Section 7.2
2.1046, 30.202	Equivalent Isotropic Radiated Power	43dBm		PASS	Section 7.3
2.1051, 30.203	Spurious Emissions	-13dBm/MHz for all out-of-band emissions		PASS	Section 7.4
2.1051, 30.203	Out-of-Band Emissions at the Band Edge	-13dBm/MHz for all out-of-band emissions, -5dBm/MHz from the band edge up to 10% of the channel BW		PASS	Section 7.5
2.1055	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 7.6

Table 7-1. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and modulations were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) Per 2.1057(a)(2), spurious emissions were investigated up to 100GHz for n261 and up to 200GHz for n260.
- 3) The radiated RF output power and all out-of-band emissions in the spurious domain are evaluated to the EIRP limits.
- 4) "CC" refers to "Component Carriers".
- 5) Beam IDs were chosen based on which Beam ID produces the highest EIRP during EIRP simulation.
- 6) All testing was performed using FTM (Factory Test Mode) software at continuous Tx operation (100% duty cycle).
- 7) The CP-OFDM and DFT-s-OFDM transmission schemes were investigated fully for each test type and only the worst case data is included.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 12 of 110

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 Section 5.4.3
 KDB 842590 D01 v01r02 Section 4.3

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Notes


1. The EUT supports CP-OFDM and DFT-s-OFDM. OBW was measured for both waveforms and the worst case has been included in the report.
2. Due to similar antenna performance from both patch antennas, the Occupied Bandwidth was only measured on one antenna for each band.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 13 of 110

Band n261

Channel	Bandwidth	CCs Active	Transmission Scheme	Modulation	OBW [MHz]
Mid	100	1	CP-OFDM	QPSK	94.0
			DFT-s-OFDM	pi/2-BPSK	93.8
			CP-OFDM	16QAM	94.1
			CP-OFDM	64QAM	94.1
		2	CP-OFDM	QPSK	191
			DFT-s-OFDM	pi/2-BPSK	189
			CP-OFDM	16QAM	191
			CP-OFDM	64QAM	192
	50	1	CP-OFDM	QPSK	45.7
			DFT-s-OFDM	pi/2-BPSK	45.6
			CP-OFDM	16QAM	45.5
			CP-OFDM	64QAM	45.6
		2	CP-OFDM	QPSK	95.0
			DFT-s-OFDM	pi/2-BPSK	94.9
			CP-OFDM	16QAM	94.5
			CP-OFDM	64QAM	94.9


Table 7-2. Summary of Ant 1 Occupied Bandwidths (n261)

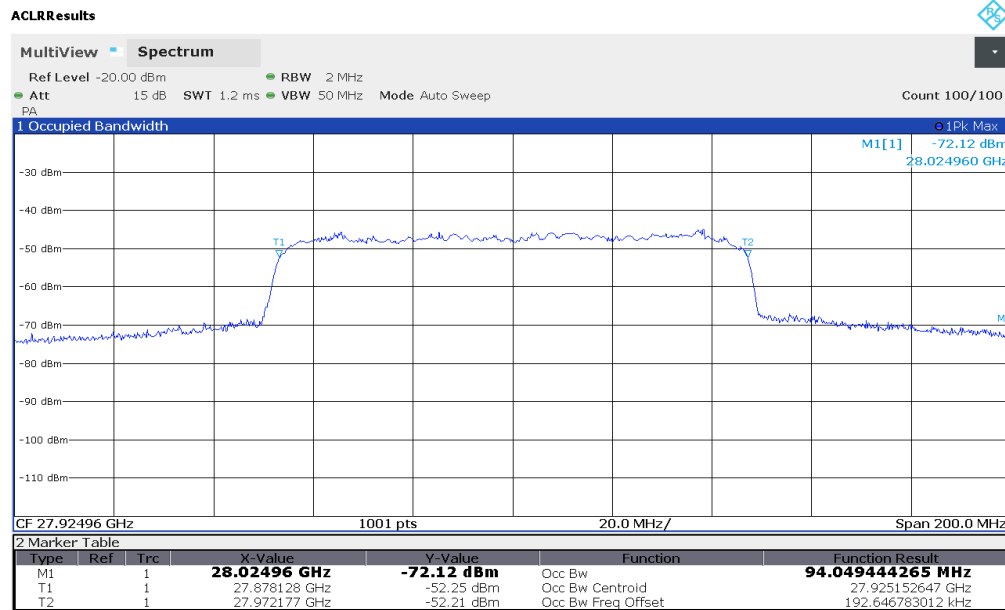

Plot 7-1. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – QPSK – Mid Channel)


FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 14 of 110

ACLRRResults

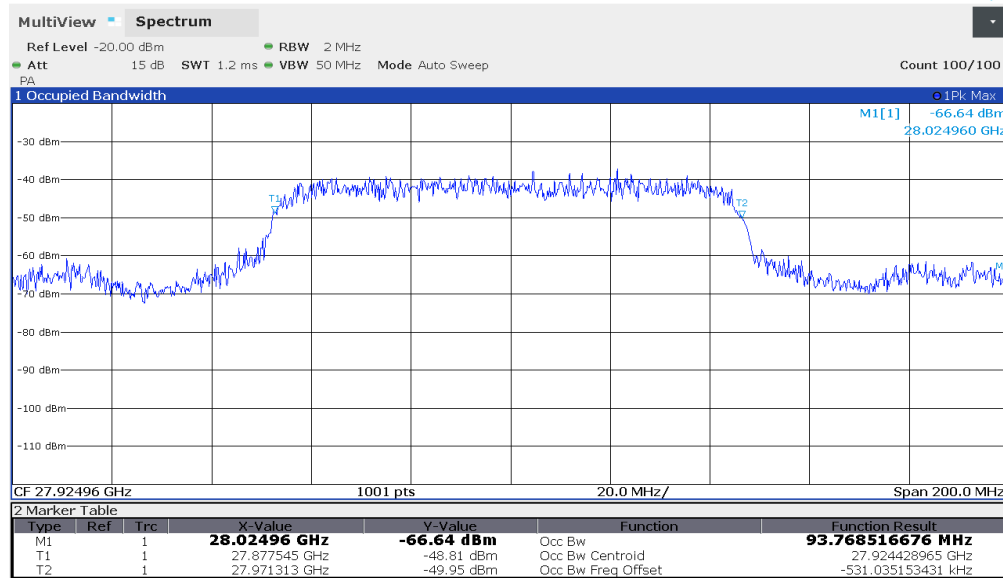

Plot 7-2. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – pi/2-BPSK – Mid Channel)


ACLRRResults

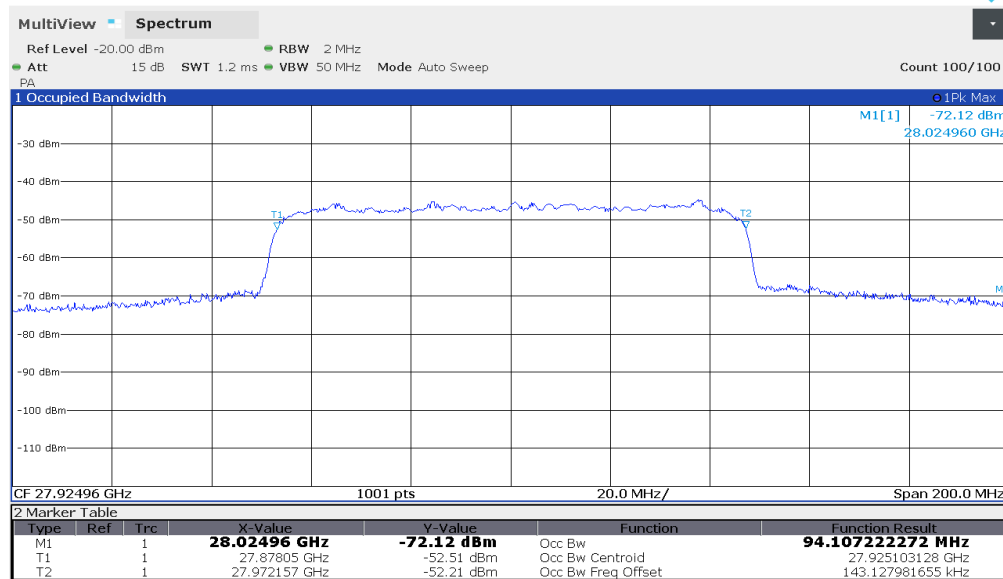


Plot 7-3. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 16QAM – Mid Channel)

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 15 of 110

ACLRRResults

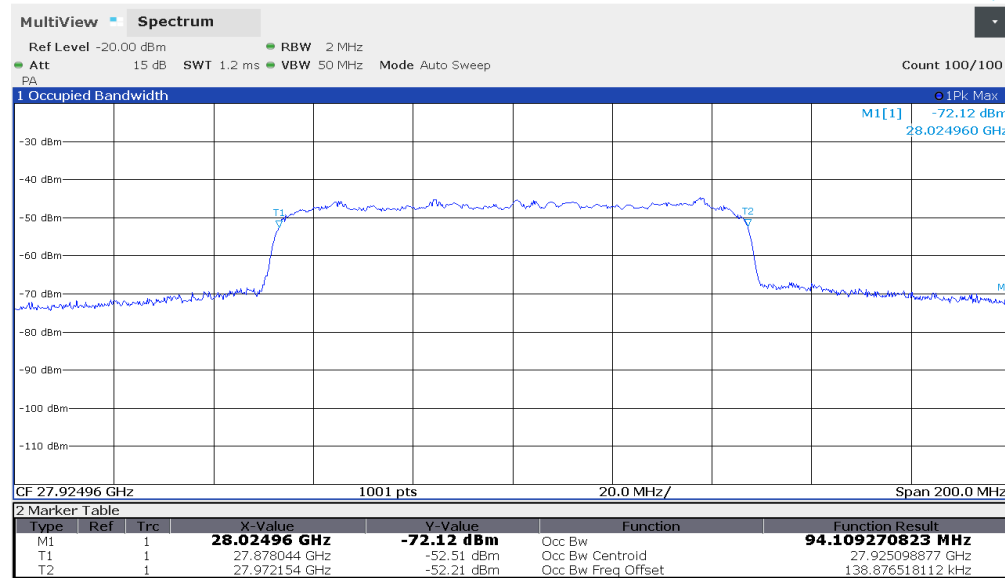

Plot 7-4. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 64QAM – Mid Channel)

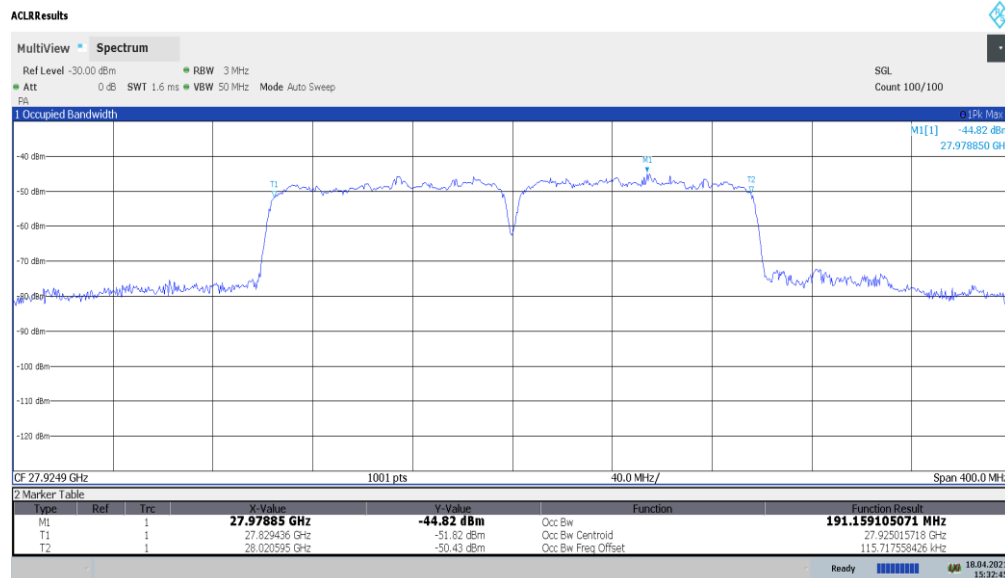

15:32:46 18.04.2021


Plot 7-5. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – QPSK – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 16 of 110

© 2021 PCTEST


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

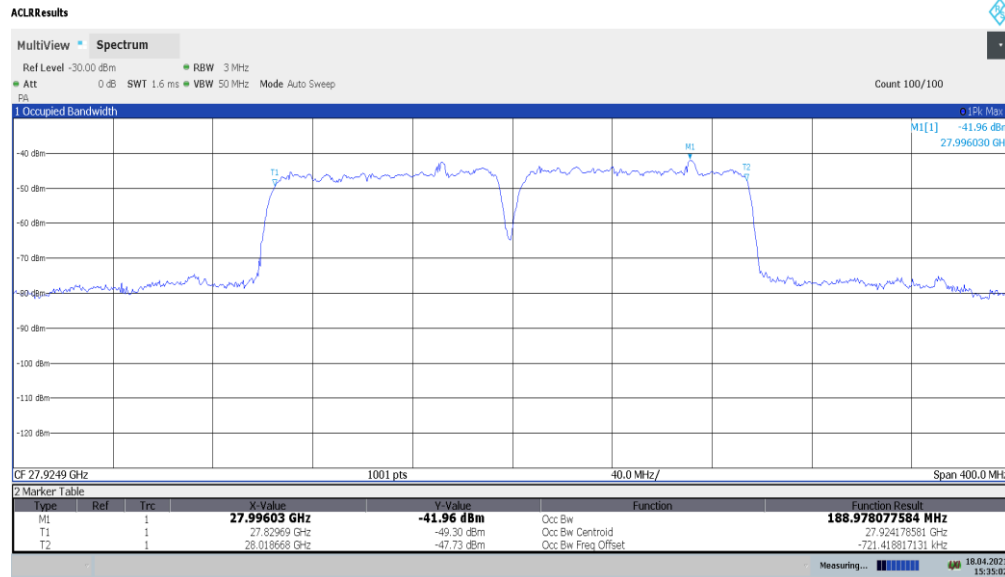

15:35:03 18.04.2021


Plot 7-6. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – pi/2-BPSK – Mid Channel)

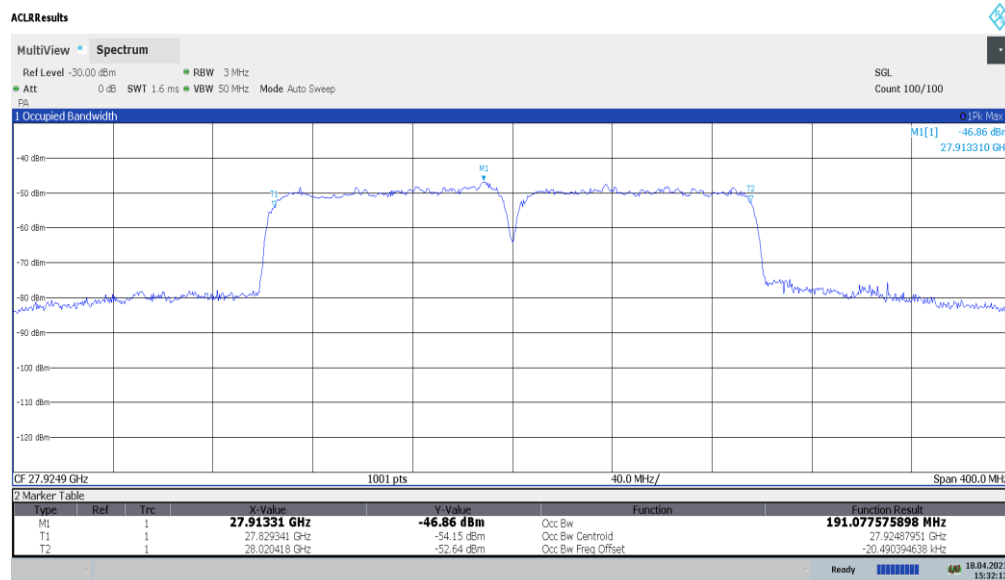

15:32:14 18.04.2021


Plot 7-7. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 17 of 110

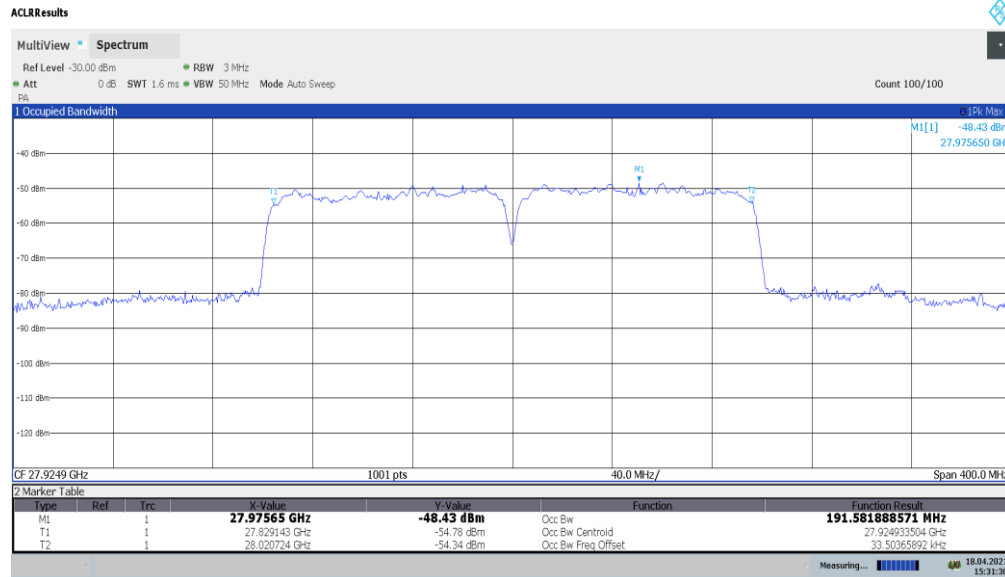

15:31:31 18.04.2021


Plot 7-8. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 64QAM – Mid Channel)

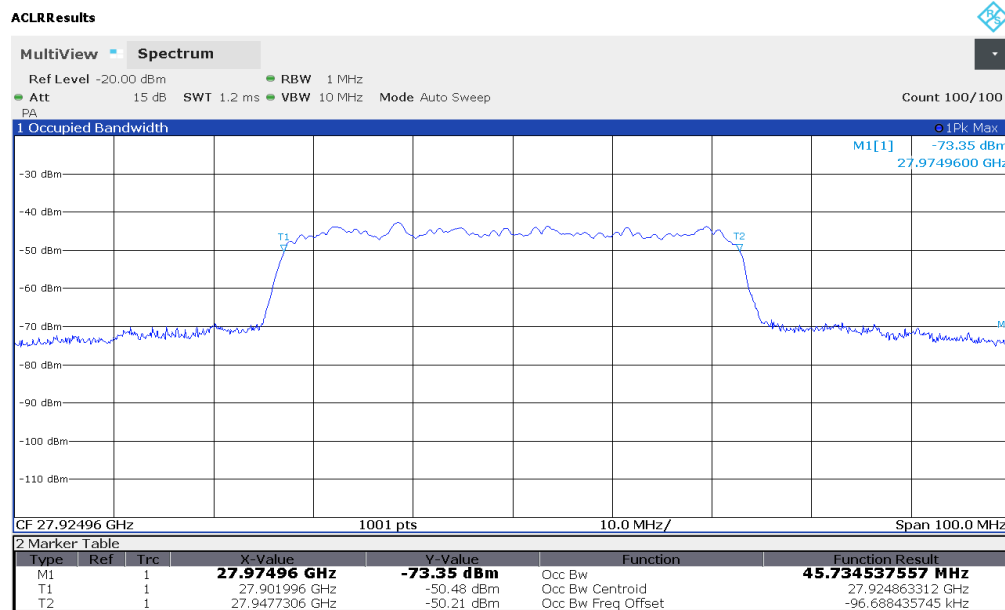

Plot 7-9. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – QPSK – Mid Channel)


FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 18 of 110

ACLRRResults

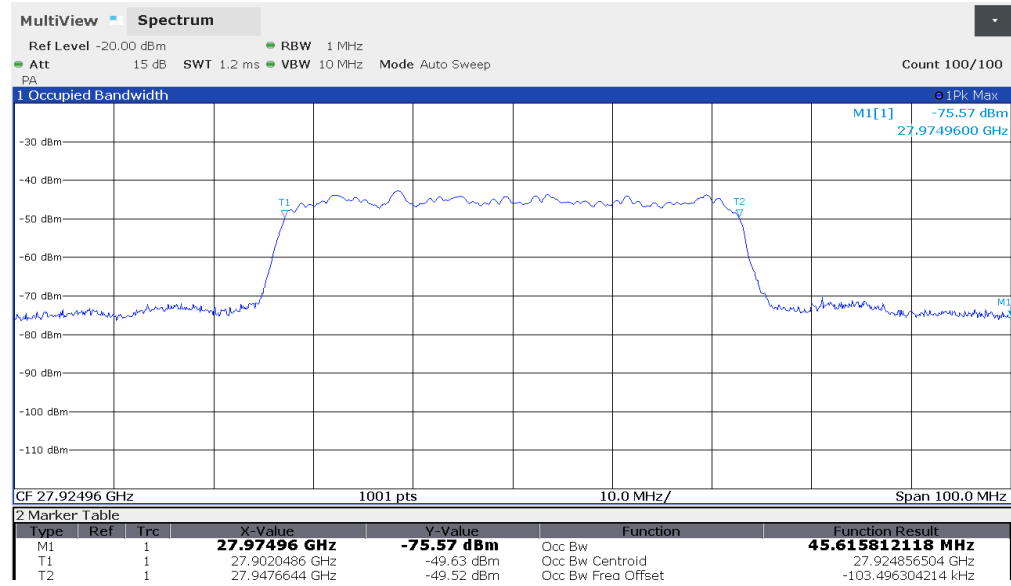

Plot 7-10. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – pi/2-BPSK – Mid Channel)


ACLRRResults

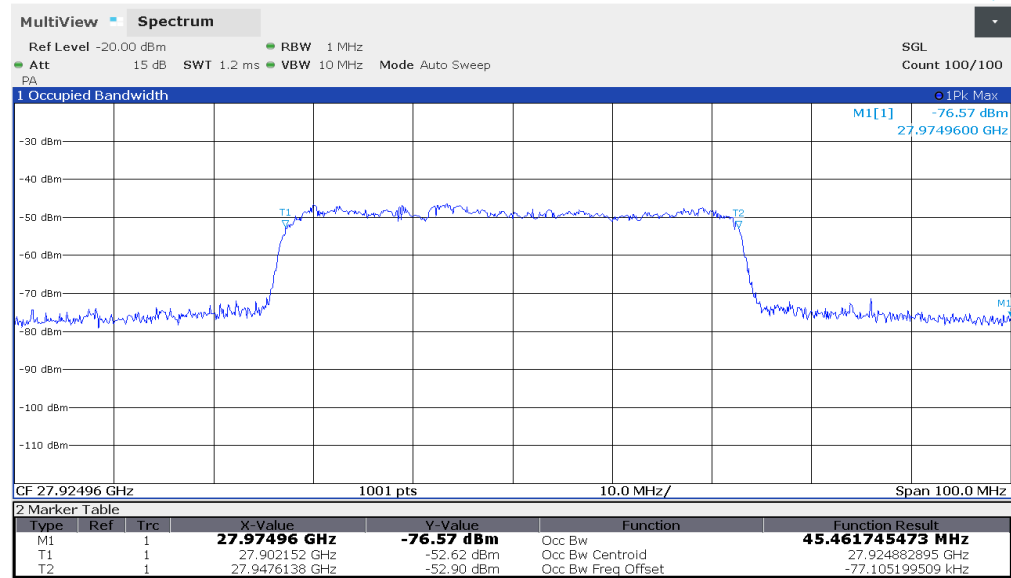

Plot 7-11. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 16QAM – Mid Channel)


FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 19 of 110

ACLRResults

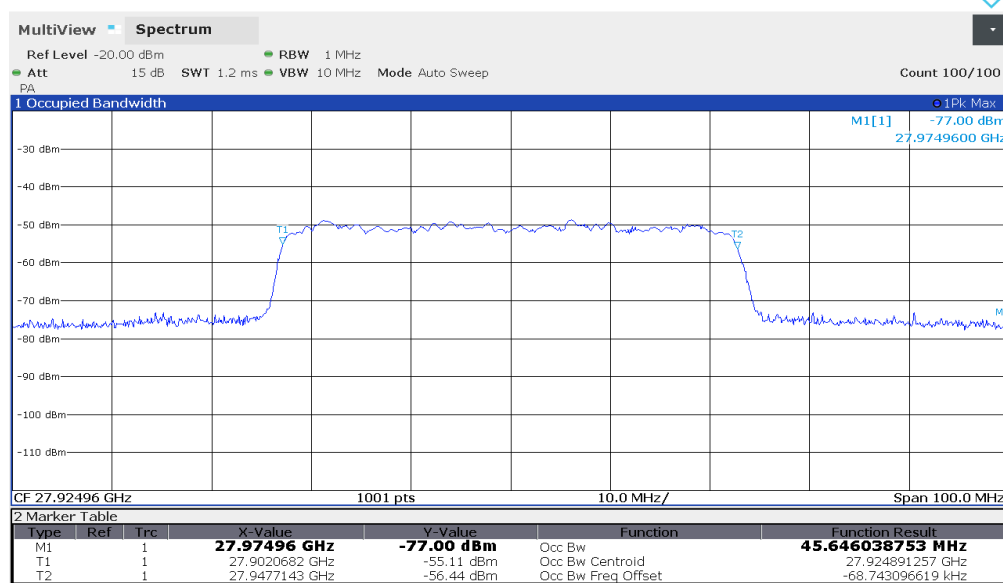

Plot 7-12. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 64QAM – Mid Channel)


ACLRResults

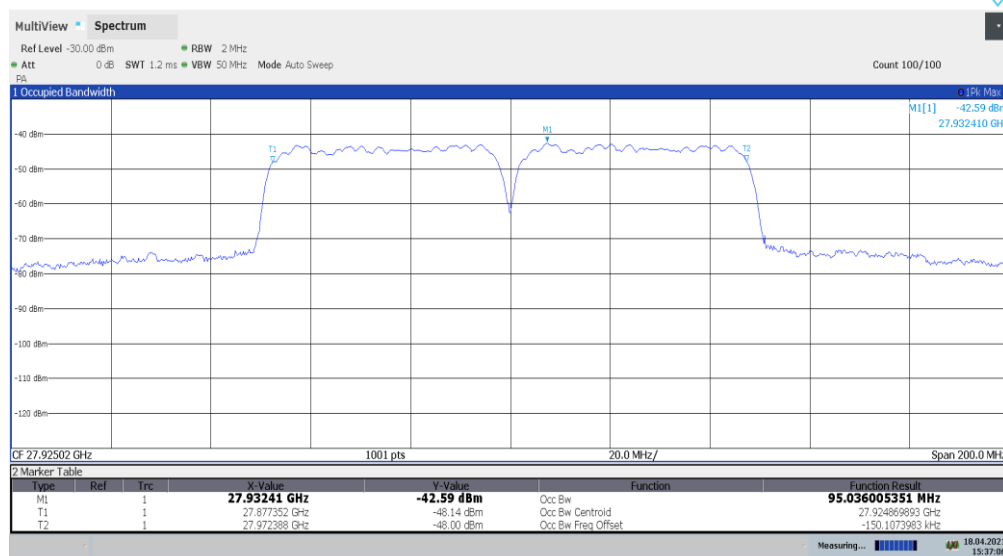

15:37:07 18.04.2021


Plot 7-13. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – QPSK – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 20 of 110

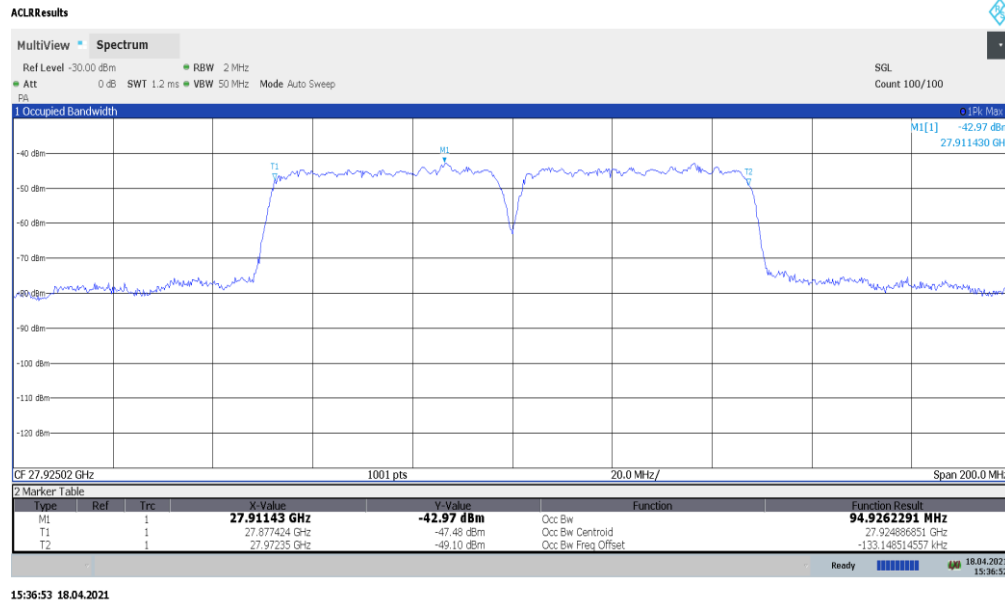

15:36:53 18.04.2021


Plot 7-14. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – pi/2-BPSK – Mid Channel)

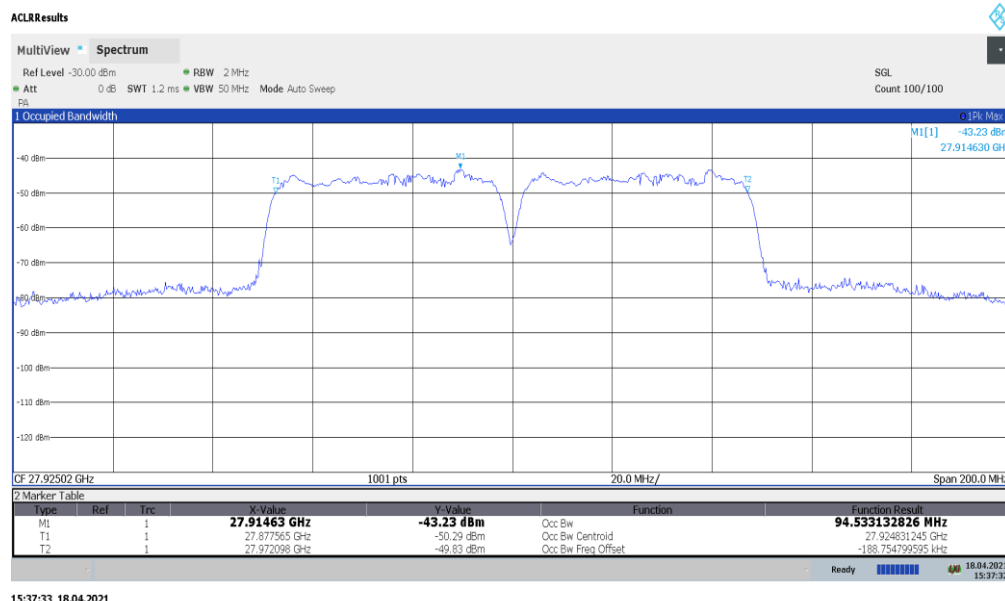

15:37:33 18.04.2021

Plot 7-15. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 21 of 110

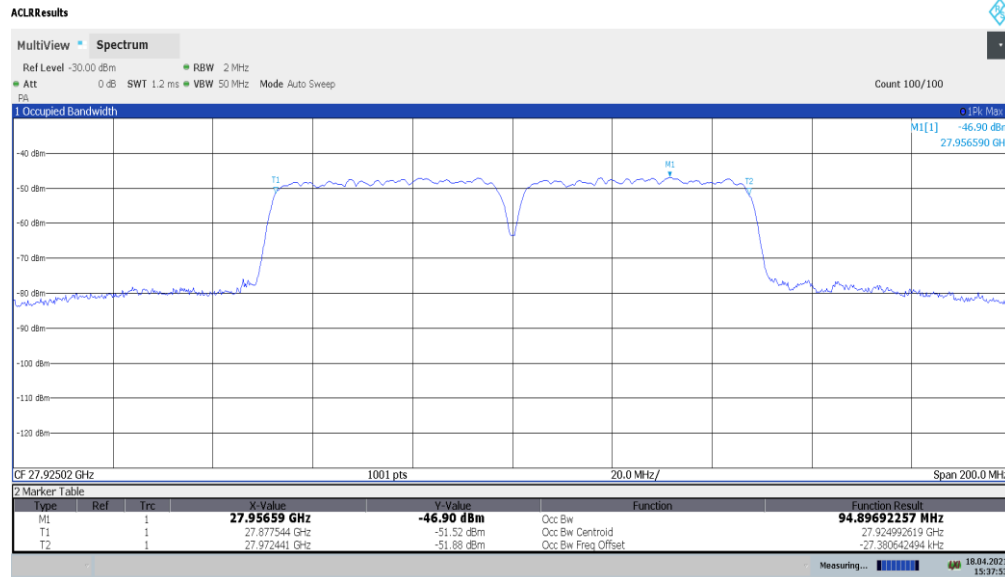

15:37:53 18.04.2021

Plot 7-16. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 64QAM – Mid Channel)

FCC ID: A3LSMF926U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	
			Page 22 of 110

© 2021 PCTEST


V1.0

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Band n260


Channel	Bandwidth	CCs Active	Transmission Scheme	Modulation	OBW [MHz]
Mid	100	1	CP-OFDM	QPSK	93.3
			DFT-s-OFDM	pi/2-BPSK	90.5
			CP-OFDM	16QAM	92.7
			CP-OFDM	64QAM	92.5
		2	CP-OFDM	QPSK	191
			DFT-s-OFDM	pi/2-BPSK	190
			CP-OFDM	16QAM	191
			CP-OFDM	64QAM	191
	50	1	CP-OFDM	QPSK	45.8
			DFT-s-OFDM	pi/2-BPSK	45.6
			CP-OFDM	16QAM	45.6
			CP-OFDM	64QAM	45.8
		2	CP-OFDM	QPSK	94.8
			DFT-s-OFDM	pi/2-BPSK	94.9
			CP-OFDM	16QAM	94.8
			CP-OFDM	64QAM	94.4

Table 7-3. Summary of Ant 1 Occupied Bandwidths (n260)

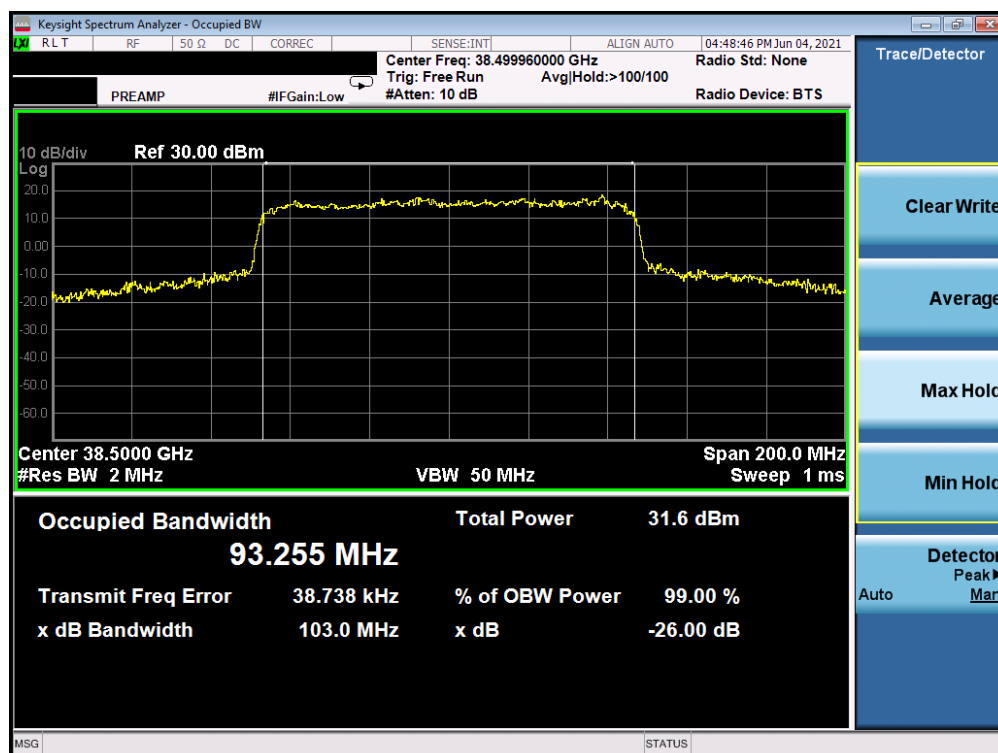


Plot 7-17. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – QPSK – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 23 of 110

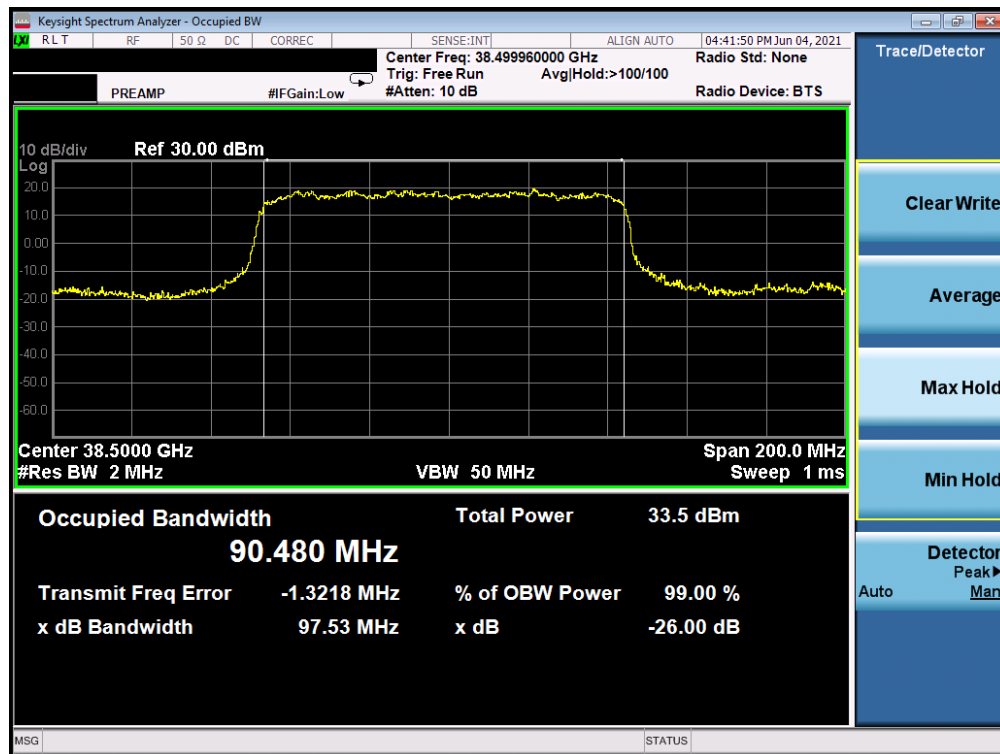


Plot 7-18. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – pi/2-BPSK – Mid Channel)

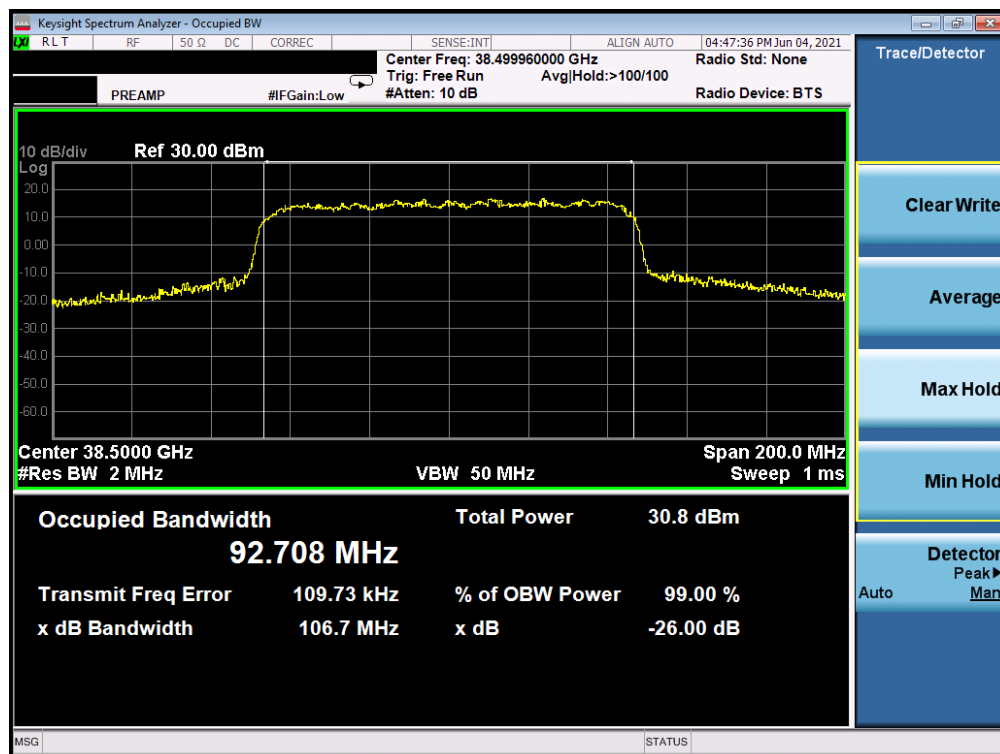


Plot 7-19. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 16QAM – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 24 of 110

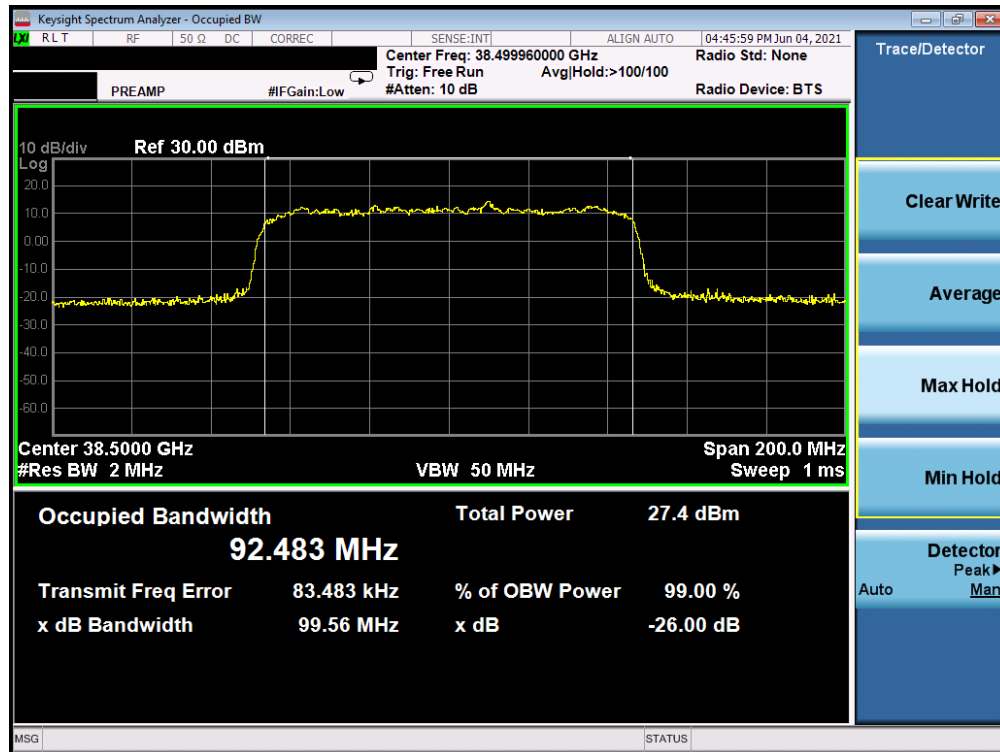


Plot 7-20. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 64QAM – Mid Channel)

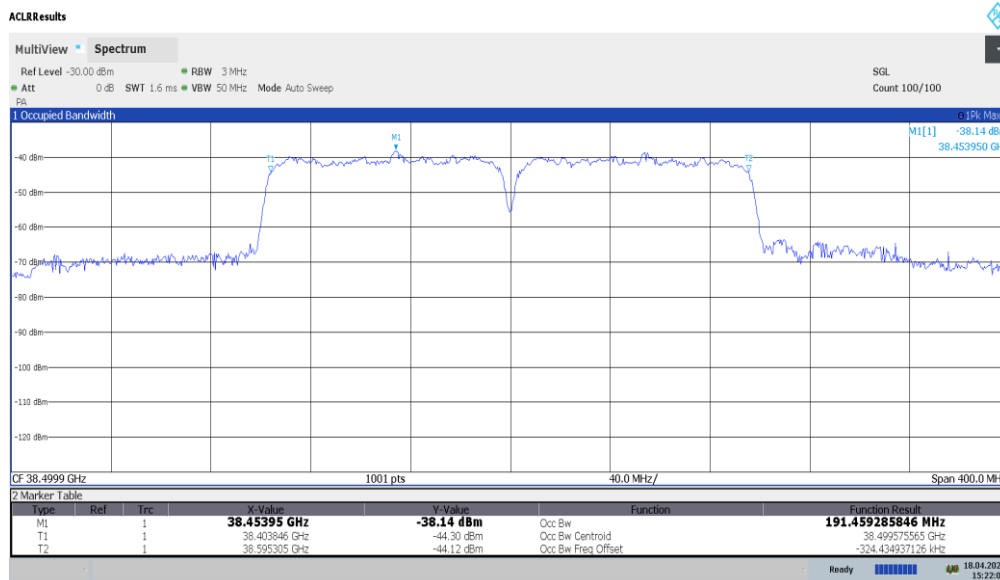

15:22:04 18.04.2021

Plot 7-21. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – QPSK – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 25 of 110

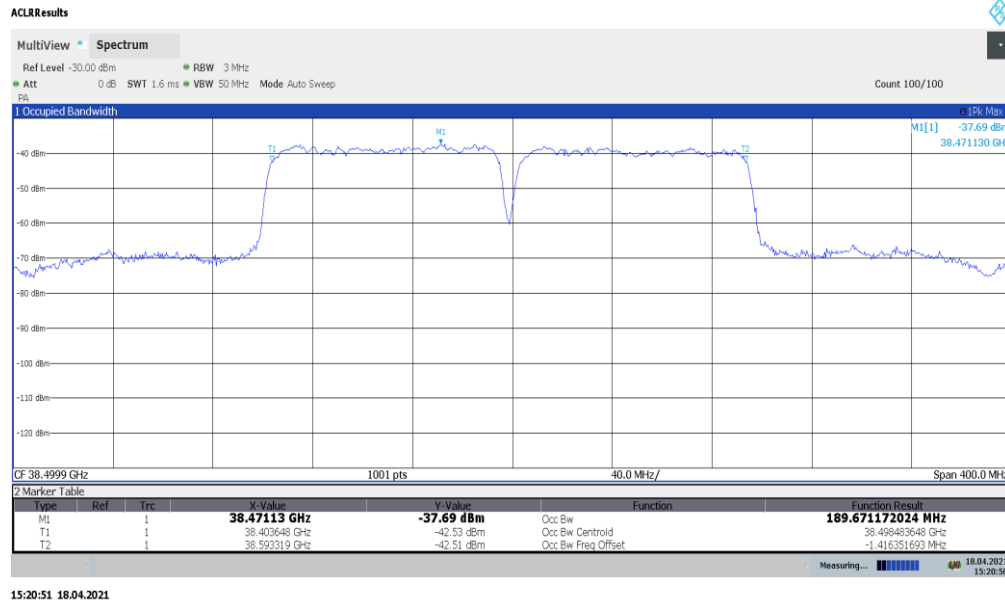

15:20:51 18.04.2021


Plot 7-22. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – pi/2-BPSK – Mid Channel)



15:22:31 18.04.2021


Plot 7-23. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 26 of 110

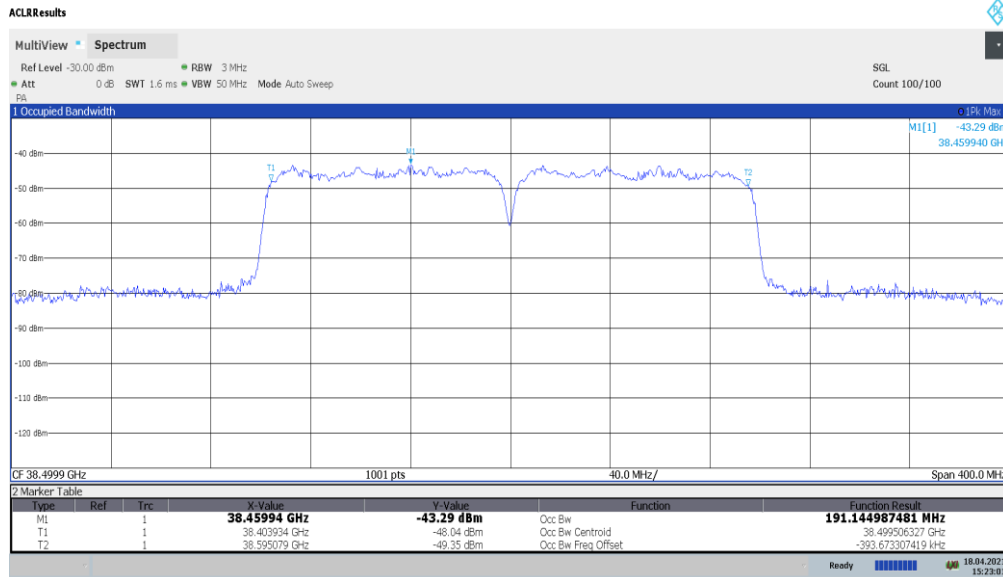

15:23:02 18.04.2021


Plot 7-24. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 64QAM – Mid Channel)

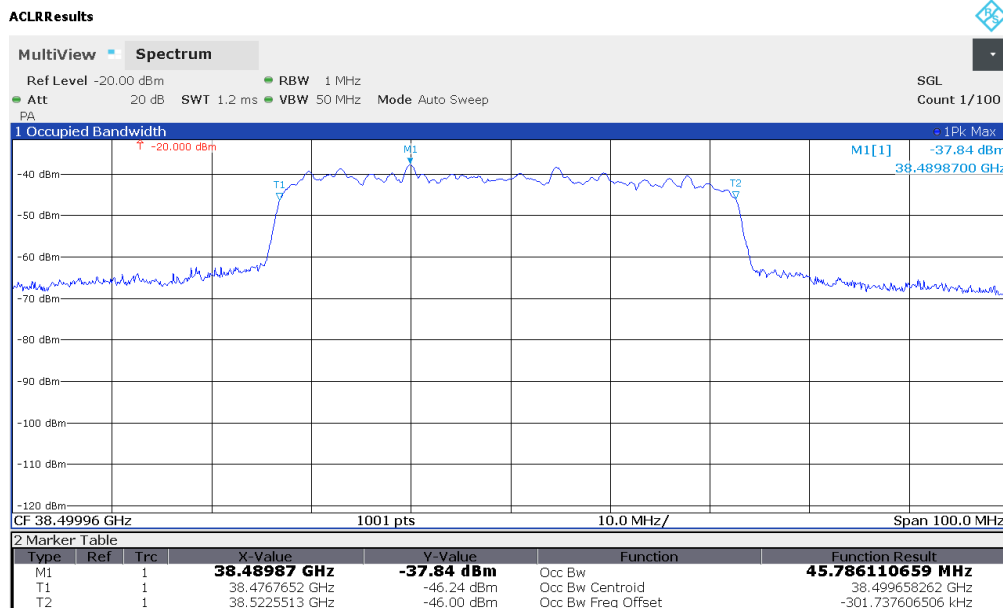

Plot 7-25. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – QPSK – Mid Channel)


FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 27 of 110

ACLRResults

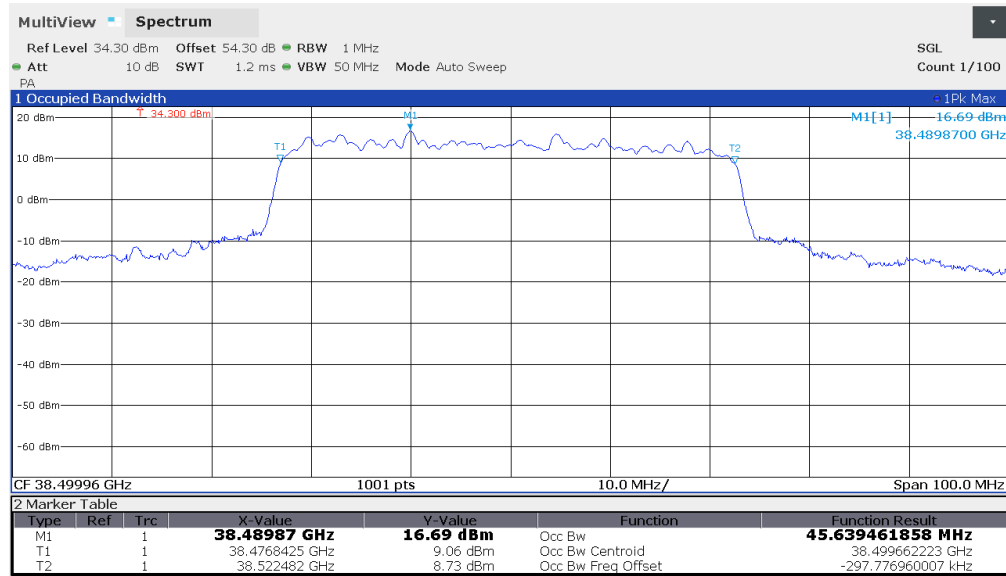

Plot 7-26. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – pi/2-BPSK – Mid Channel)


ACLRResults

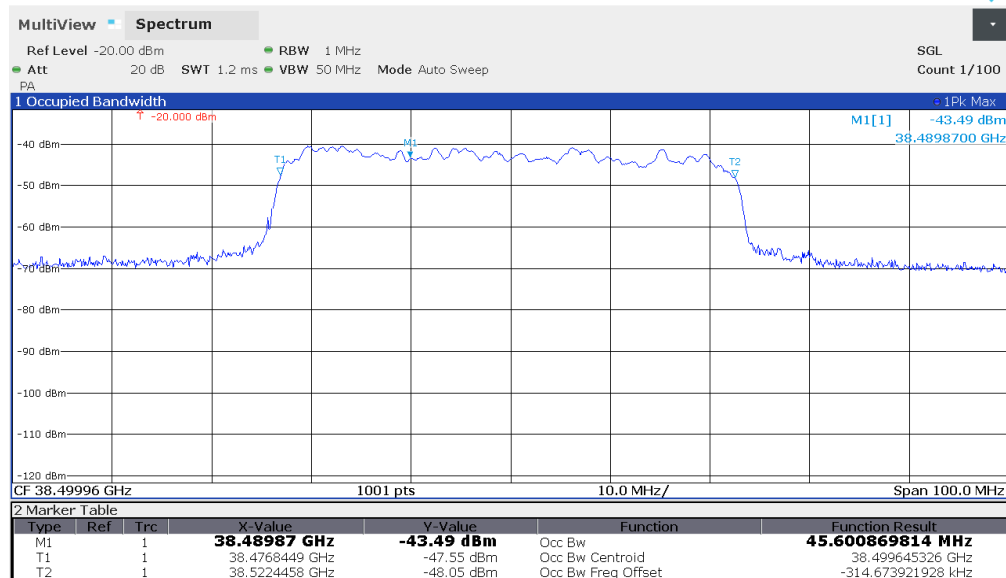

Plot 7-27. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 16QAM – Mid Channel)


FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 28 of 110

ACLRResults

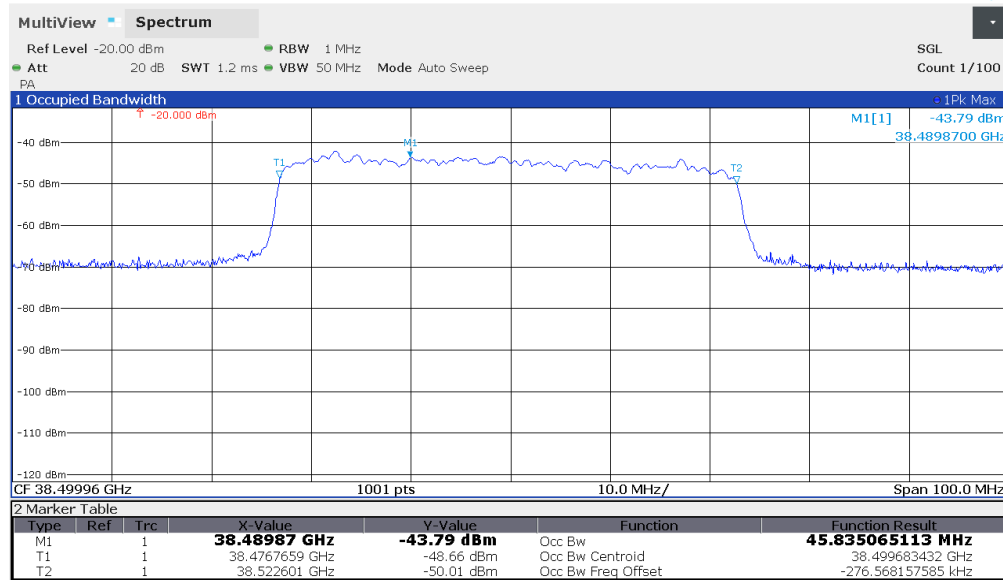

Plot 7-28. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 64QAM – Mid Channel)

ACLRResults

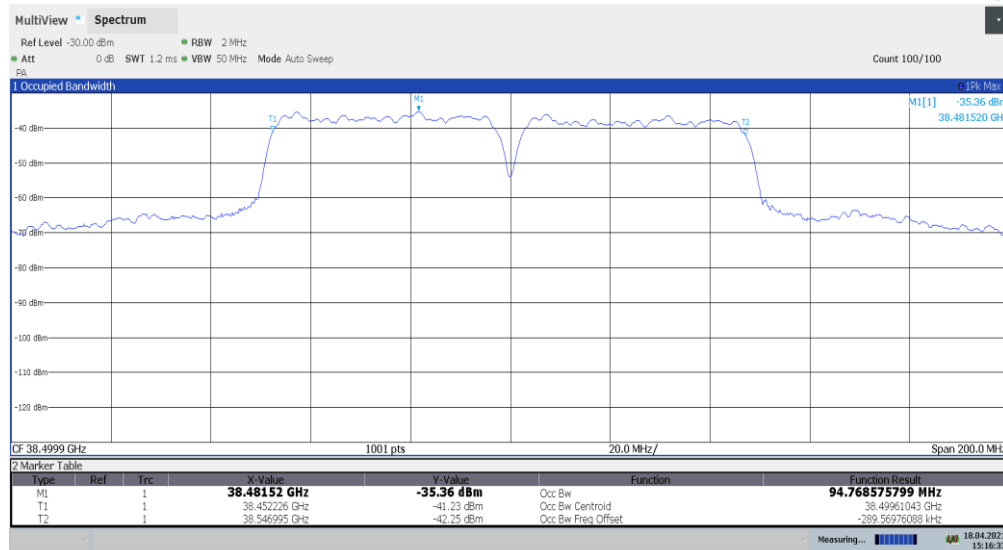

15:16:33 18.04.2021


Plot 7-29. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – QPSK – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 29 of 110


© 2021 PCTEST

V1.0

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

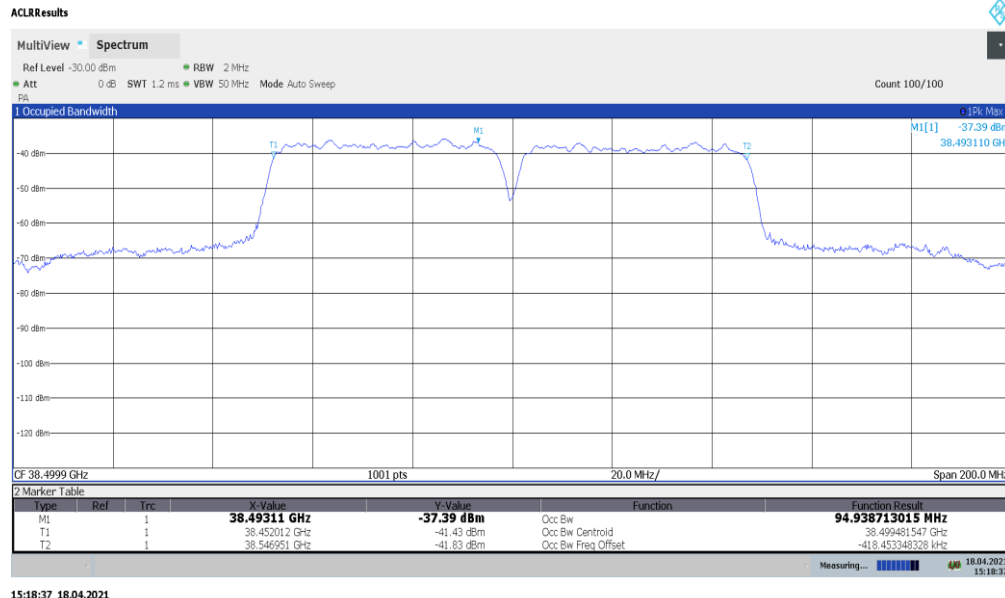


Plot 7-30. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – pi/2-BPSK – Mid Channel)

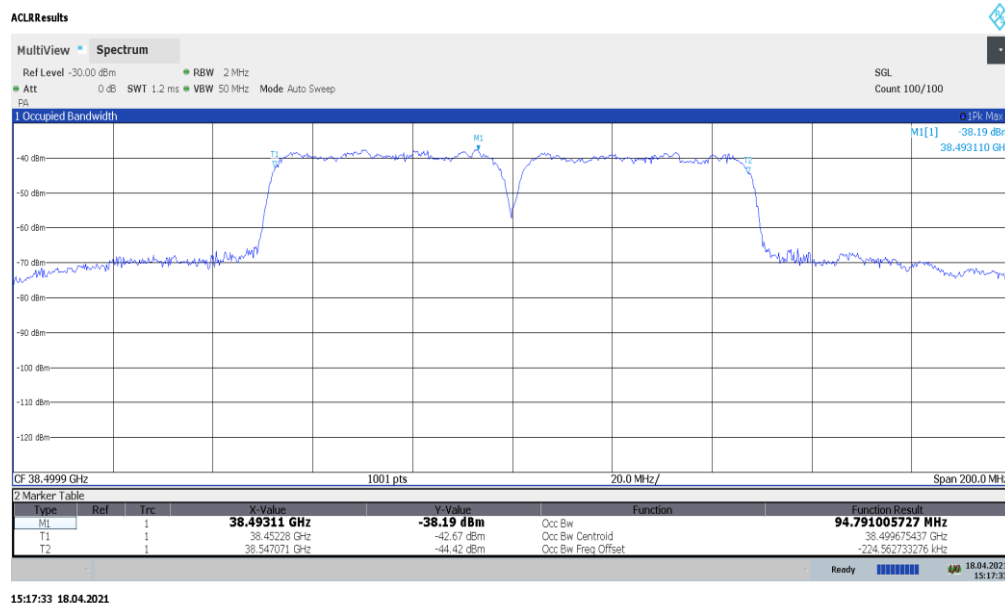

Plot 7-31. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 30 of 110

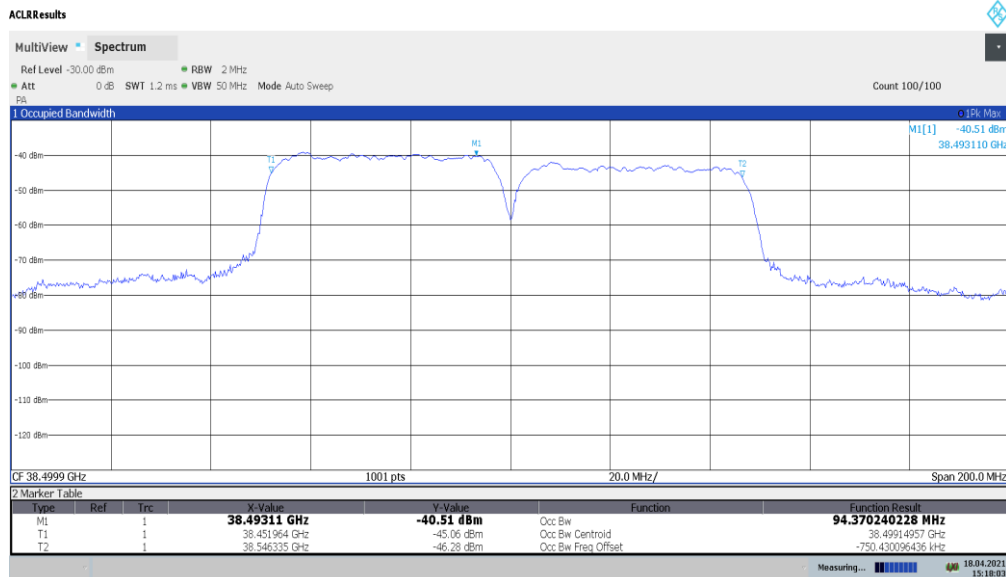

15:18:04 18.04.2021

Plot 7-32. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 64QAM – Mid Channel)

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 31 of 110

7.3 Equivalent Isotropic Radiated Power

§2.1046, §30.202

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

Test Procedures Used

ANSI C63.26-2015 Section 5.2.4.4.1
KDB 842590 D01 v01r02 Section 4.2

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 2x to 3x the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
8. Trace mode = trace averaging (RMS) over 100 sweeps
9. The trace was allowed to stabilize

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 32 of 110

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. Both H-Beam and V-Beam were investigated and the worst-case measurements were reported below.
- 2) Elements within the same antenna array are correlated to produce beamforming array gain. Antenna arrays cannot be correlated with another antenna array. During testing, only one antenna array was active.
- 3) EIRP measurements were taken at 1m test distance or as needed for Far-Field conditions, see **Table 3-1**.
- 4) The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. The field strength E is calculated $E (dB\mu V/m) = \text{Spectrum Analyzer Channel Power Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$.
- 5) Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning.
- 6) This device supports transmission of H-polarized and V-polarized beams from the antenna array in both CP-OFDM and DFT-s-OFDM transmission schemes. SISO and MIMO operation is also supported for some configurations. As part of the testing, all modes are investigated fully on the channel showing the highest simulated EIRP using QPSK modulation. The configuration that shows the highest measured EIRP was then used to determine the EIRP for the low and high channels and for the additional modulations.
- 7) The folder open configuration was the worst case, so the full "open" test results are shown in this section.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 33 of 110

Band n261 Beam ID Configurations

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	148	-
		V	20	-
	Mid	H	148	-
		V	31	-
	High	H	159	-
		V	20	-
MIMO	Low	2Tx/MIMO	159	31
	Mid	2Tx/MIMO	147	19
	High	2Tx/MIMO	148	20
SISO (Closed)	Low	H	148	-
		V	20	-
	Mid	H	148	-
		V	20	-
	High	H	148	-
		V	20	-
MIMO (Closed)	Low	2Tx/MIMO	148	20
	Mid	2Tx/MIMO	147	19
	High	2Tx/MIMO	157	29

Table 7-4. Ant 1 Worst Case Beam ID

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 34 of 110	

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	155	-
		V	26	-
	Mid	H	155	-
		V	35	-
	High	H	155	-
		V	33	-
MIMO	Low	2Tx/MIMO	154	26
	Mid	2Tx/MIMO	162	34
	High	2Tx/MIMO	162	34
SISO (Closed)	Low	H	162	-
		V	24	-
	Mid	H	155	-
		V	24	-
	High	H	155	-
		V	33	-
MIMO (Closed)	Low	2Tx/MIMO	162	34
	Mid	2Tx/MIMO	161	33
	High	2Tx/MIMO	162	34

Table 7-5. Ant 2 Worst Case Beam ID

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 35 of 110	

Band n261

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
100	1	Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	148	H	SISO	V	274	77	1 / 23	29.53
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	31	V	SISO	H	268	109	1 / 23	30.71
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	147 + 19	H + V	2Tx	V	73	317	1 / 23	29.12
		Mid	27924.96	CP-OFDM	QPSK	Folder Open	148	H	SISO	V	274	77	1 / 23	26.29
		Mid	27924.96	CP-OFDM	QPSK	Folder Open	31	V	SISO	H	268	109	1 / 23	28.44
		Mid	27924.96	CP-OFDM	QPSK	Folder Open	147 + 19	H + V	MMO	V	51	301	1 / 23	25.94
		Low	27550.08	DFT-s-OFDM	QPSK	Folder Open	20	V	SISO	H	293	103	1 / 23	29.32
		High	28299.96	DFT-s-OFDM	QPSK	Folder Open	20	V	SISO	H	290	83	1 / 23	29.28
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Closed	20	V	SISO	H	74	111	1 / 23	29.71
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	31	V	SISO	H	268	109	1 / 23	30.62
		Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	31	V	SISO	H	268	109	1 / 23	29.21
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	31	V	SISO	H	268	109	1 / 23	27.26
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	31	V	SISO	H	96	243	66 / 0	23.91
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	31	V	SISO	H	96	243	66 / 0	23.85
100+100	2	Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	31	V	SISO	H	96	243	66 / 0	22.28
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	31	V	SISO	H	96	243	66 / 0	20.16

Table 7-6. Ant 1 EIRP Data (Band n261 - 100MHz)

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
50	1	Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	148	H	SISO	V	317.0	75.0	1 / 12	29.03
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	31	V	SISO	H	269.0	73.0	1 / 12	30.23
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	147 + 19	H + V	2Tx	V	73.0	317.0	1 / 12	29.80
		Mid	27924.96	CP-OFDM	QPSK	Folder Open	148	H	SISO	V	317.0	75.0	1 / 12	26.33
		Mid	27924.96	CP-OFDM	QPSK	Folder Open	31	V	SISO	H	269.0	73.0	1 / 12	27.36
		Mid	27924.96	CP-OFDM	QPSK	Folder Open	147 + 19	H + V	MMO	V	73.0	317.0	1 / 12	28.30
		Low	27525.00	DFT-s-OFDM	QPSK	Folder Open	20	V	SISO	H	295.0	287.0	1 / 19	29.13
		High	28324.92	DFT-s-OFDM	QPSK	Folder Open	20	V	SISO	H	290.0	83.0	1 / 19	29.39
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Closed	20	V	SISO	H	73.0	261.0	1 / 12	29.92
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	20	V	SISO	H	269.0	73.0	1 / 12	30.02
		Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	20	V	SISO	H	269.0	73.0	1 / 12	28.78
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	20	V	SISO	H	269.0	73.0	1 / 12	26.82
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	31	V	SISO	H	240.0	95.0	32 / 0	23.73
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	20	V	SISO	H	240.0	95.0	32 / 0	24.24
50+50	2	Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	20	V	SISO	H	240.0	95.0	32 / 0	23.03
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	20	V	SISO	H	240.0	95.0	32 / 0	21.91

Table 7-7. Ant 1 EIRP Data (Band n261 - 50MHz)

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
100	1	Low	27550.08	DFT-s-OFDM	QPSK	Folder Open	155	H	SISO	V	321.0	4.0	1 / 23	25.13
		Low	27550.08	DFT-s-OFDM	QPSK	Folder Open	26	V	SISO	H	263.0	19.0	1 / 23	25.22
		Low	27550.08	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	59.0	349.0	1 / 23	25.71
		Low	27550.08	CP-OFDM	QPSK	Folder Open	155	H	SISO	V	321.0	4.0	1 / 23	23.11
		Low	27550.08	CP-OFDM	QPSK	Folder Open	26	V	SISO	H	263.0	19.0	1 / 23	23.26
		Low	27550.08	CP-OFDM	QPSK	Folder Open	155 + 26	H + V	MMO	V	59.0	349.0	1 / 23	23.31
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	57.0	342.0	1 / 23	26.39
		High	28299.96	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	57.0	345.0	1 / 23	25.54
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Closed	155 + 26	H + V	2Tx	V	57.0	342.0	1 / 23	25.48
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	155 + 26	H + V	2Tx	V	57.0	342.0	1 / 23	26.62
		Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	155 + 26	H + V	2Tx	V	57.0	342.0	1 / 23	24.28
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	155 + 26	H + V	2Tx	V	57.0	342.0	1 / 23	22.68
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	59.0	341.0	66 / 0	21.57
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	155 + 26	H + V	2Tx	V	59.0	341.0	66 / 0	21.43
100+100	2	Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	155 + 26	H + V	2Tx	V	59.0	341.0	66 / 0	20.02
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	155 + 26	H + V	2Tx	V	59.0	341.0	66 / 0	18.53

Table 7-8. Ant 2 EIRP Data (Band n261 - 100MHz)

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
50	1	Low	27525.00	DFT-s-OFDM	QPSK	Folder Open	155	H	SISO	V	332.0	360.0	1 / 19	24.80
		Low	27525.00	DFT-s-OFDM	QPSK	Folder Open	26	V	SISO	H	262.0	3.0	1 / 19	25.44
		Low	27525.00	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	56.0	345.0	1 / 19	25.53
		Low	27525.00	CP-OFDM	QPSK	Folder Open	155	H	SISO	V	332.0	360.0	1 / 19	21.48
		Low	27525.00	CP-OFDM	QPSK	Folder Open	26	V	SISO	H	262.0	3.0	1 / 19	23.44
		Low	27525.00	CP-OFDM	QPSK	Folder Open	155 + 26	H + V	MMO	V	56.0	345.0	1 / 19	21.16
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	57.0	337.0	1 / 12	26.68
		High	28324.92	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	59.0	345.0	1 / 12	25.71
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Closed	155 + 26	H + V	2Tx	V	57.0	337.0	1 / 12	25.61
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	155 + 26	H + V	2Tx	V	57.0	337.0	1 / 12	26.47
		Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	155 + 26	H + V	2Tx	V	57.0	337.0	1 / 12	24.26
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	155 + 26	H + V	2Tx	V	57.0	337.0	1 / 12	22.82
		Mid	27924.96	DFT-s-OFDM	QPSK	Folder Open	155 + 26	H + V	2Tx	V	58.0	340.0	32 / 0	21.18
		Mid	27924.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	155 + 26	H + V	2Tx	V	58.0	340.0	32 / 0	21.16
50+50	2	Mid	27924.96	DFT-s-OFDM	16QAM	Folder Open	155 + 26	H + V	2Tx	V	58.0	340.0	32 / 0	19.60
		Mid	27924.96	DFT-s-OFDM	64QAM	Folder Open	155 + 26	H + V	2Tx	V	58.0	340.0	32 / 0	17.20

Table 7-9. Ant 2 EIRP Data (Band n261 - 50MHz)

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)					Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset				Page 36 of 110	

Band n260 Beam ID Configurations

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	151	-
		V	22	-
	Mid	H	150	-
		V	33	-
	High	H	152	-
		V	23	-
MIMO	Low	2Tx/MIMO	160	32
	Mid	2Tx/MIMO	150	22
	High	2Tx/MIMO	149	21
SISO (Closed)	Low	H	151	-
		V	32	-
	Mid	H	150	-
		V	33	-
	High	H	152	-
		V	23	-
MIMO (Closed)	Low	2Tx/MIMO	160	32
	Mid	2Tx/MIMO	150	22
	High	2Tx/MIMO	149	21

Table 7-10. Ant 1 Worst Case Beam ID

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 37 of 110	

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	164	-
		V	28	-
	Mid	H	165	-
		V	37	-
	High	H	164	-
		V	37	-
MIMO	Low	2Tx/MIMO	154	26
	Mid	2Tx/MIMO	162	34
	High	2Tx/MIMO	153	25
SISO (Closed)	Low	H	157	-
		V	29	-
	Mid	H	163	-
		V	37	-
	High	H	163	-
		V	29	-
MIMO (Closed)	Low	2Tx/MIMO	153	25
	Mid	2Tx/MIMO	162	34
	High	2Tx/MIMO	153	25

Table 7-11. Ant 2 Worst Case Beam ID

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 38 of 110	

Band n260

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
100	1	Low	37050.00	DFT-s-OFDM	QPSK	Folder closed	151	H	SISO	H	253.0	120.0	1 / 33	26.00
		Low	37050.00	DFT-s-OFDM	QPSK	Folder Open	33	V	SISO	V	115.0	278.0	1 / 33	27.49
		Low	37050.00	DFT-s-OFDM	QPSK	Folder Open	160 + 32	H + V	2Tx	H	265.0	122.0	1 / 33	28.20
		Low	37050.00	CP-OFDM	QPSK	Folder Closed	151	H	SISO	H	253.0	120.0	1 / 33	22.49
		Low	37050.00	CP-OFDM	QPSK	Folder Open	33	V	SISO	V	115.0	278.0	1 / 33	24.24
		Low	37050.00	CP-OFDM	QPSK	Folder Open	160 + 32	H + V	MMO	H	265.0	122.0	1 / 33	24.39
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	150 + 22	H + V	2Tx	H	307.0	92.0	1 / 33	26.68
		High	39949.92	DFT-s-OFDM	QPSK	Folder Open	149 + 21	H + V	2Tx	H	65.0	296.0	1 / 23	26.14
		Low	37050.00	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	160 + 32	H + V	2Tx	H	265.0	122.0	1 / 23	27.50
		Low	37050.00	DFT-s-OFDM	16QAM	Folder Open	160 + 32	H + V	2Tx	H	265.0	122.0	1 / 23	26.37
		Low	37050.00	DFT-s-OFDM	64QAM	Folder Open	160 + 32	H + V	2Tx	H	265.0	122.0	1 / 23	23.27
		Low	37050.00	DFT-s-OFDM	QPSK	Folder Open	160 + 32	H + V	2Tx	H	268.0	28.0	66 / 0	22.90
100+100	2	Low	37050.00	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	160 + 32	H + V	2Tx	H	268.0	28.0	66 / 0	22.86
		Low	37050.00	DFT-s-OFDM	16QAM	Folder Open	160 + 32	H + V	2Tx	H	268.0	28.0	66 / 0	21.45
		Low	37050.00	DFT-s-OFDM	64QAM	Folder Open	160 + 32	H + V	2Tx	H	268.0	28.0	66 / 0	20.11
		Low	37050.00	DFT-s-OFDM	QPSK	Folder Open	160 + 32	H + V	2Tx	H	268.0	28.0	66 / 0	20.11

Table 7-12. Ant 1 EIRP Data (Band n260 - 100MHz)

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
50	1	Low	37025.04	DFT-s-OFDM	QPSK	Folder closed	151	H	SISO	X	254.0	119.0	1 / 16	25.68
		Low	37025.04	DFT-s-OFDM	QPSK	Folder Open	33	V	SISO	V	115.0	278.0	1 / 16	27.36
		Low	37025.04	DFT-s-OFDM	QPSK	Folder Open	160 + 32	H + V	2Tx	H	264.0	123.0	1 / 16	27.90
		Low	37025.04	CP-OFDM	QPSK	Folder Open	151	H	SISO	X	254.0	119.0	1 / 16	22.36
		Low	37025.04	CP-OFDM	QPSK	Folder Open	33	V	SISO	V	115.0	278.0	1 / 16	22.26
		Low	37025.04	CP-OFDM	QPSK	Folder Open	160 + 32	H + V	MIMO	H	264.0	123.0	1 / 16	24.20
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	150 + 22	H + V	2Tx	H	309.0	78.0	1 / 16	26.96
		High	39975.00	DFT-s-OFDM	QPSK	Folder Open	149 + 21	H + V	2Tx	H	65.0	296.0	1 / 12	25.94
		Low	37025.04	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	160 + 32	H + V	2Tx	H	264.0	123.0	1 / 12	27.49
		Low	37025.04	DFT-s-OFDM	16QAM	Folder Open	160 + 32	H + V	2Tx	H	264.0	123.0	1 / 12	26.36
		Low	37025.04	DFT-s-OFDM	64QAM	Folder Open	160 + 32	H + V	2Tx	H	264.0	123.0	1 / 12	23.26
		Low	37025.04	DFT-s-OFDM	QPSK	Folder Open	160 + 32	H + V	2Tx	H	265.0	109.0	32 / 0	22.40
50+50	2	Low	37025.04	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	160 + 32	H + V	2Tx	H	265.0	109.0	32 / 0	22.46
		Low	37025.04	DFT-s-OFDM	16QAM	Folder Open	160 + 32	H + V	2Tx	H	265.0	109.0	32 / 0	20.63
		Low	37025.04	DFT-s-OFDM	64QAM	Folder Open	160 + 32	H + V	2Tx	H	265.0	109.0	32 / 0	19.21
		Low	37025.04	DFT-s-OFDM	QPSK	Folder Open	160 + 32	H + V	2Tx	H	265.0	109.0	32 / 0	19.21

Table 7-13. Ant 1 EIRP Data (Band n260 - 50MHz)

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
100	1	Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	165	H	SISO	V	159.0	294.0	1 / 23	26.31
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	37	V	SISO	H	155.0	75.0	1 / 33	27.54
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	162 + 34	H + V	2Tx	H	125.0	277.0	1 / 23	26.94
		Mid	38499.96	CP-OFDM	QPSK	Folder Open	165	H	SISO	V	159.0	294.0	1 / 23	23.19
		Mid	38499.96	CP-OFDM	QPSK	Folder Open	37	V	SISO	H	155.0	75.0	1 / 33	25.27
		Mid	38499.96	CP-OFDM	QPSK	Folder Open	162 + 34	H + V	MMO	H	125.0	277.0	1 / 23	23.67
		Low	37050.00	DFT-s-OFDM	QPSK	Folder Open	28	V	SISO	H	201.0	286.0	1 / 33	26.80
		High	39949.92	DFT-s-OFDM	QPSK	Folder Open	37	V	SISO	H	194.0	309.0	1 / 42	27.17
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Closed	37	V	SISO	H	88.0	75.0	1 / 42	26.12
		Mid	38499.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	37	V	SISO	H	155.0	75.0	1 / 33	27.48
		Mid	38499.96	DFT-s-OFDM	16QAM	Folder Open	37	V	SISO	H	155.0	75.0	1 / 33	26.14
		Mid	38499.96	DFT-s-OFDM	64QAM	Folder Open	37	V	SISO	H	155.0	75.0	1 / 33	24.02
100+100	2	Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	37	V	SISO	H	201.0	273.0	66 / 0	23.40
		Mid	38499.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	37	V	SISO	H	201.0	273.0	66 / 0	23.49
		Mid	38499.96	DFT-s-OFDM	16QAM	Folder Open	37	V	SISO	H	201.0	273.0	66 / 0	22.24
		Mid	38499.96	DFT-s-OFDM	64QAM	Folder Open	37	V	SISO	H	201.0	273.0	66 / 0	19.82

Table 7-14. Ant 2 EIRP Data (Band n260 - 100MHz)

Bandwidth (MHz)	CCs Active	Channel	Frequency [MHz]	Transmission Scheme	Modulation	Configuration	BeamID	Beam Pol.	Ant. Div.	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
50	1	Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	165	H	SISO	V	151.0	293.0	1 / 12	26.54
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	37	V	SISO	H	155.0	75.0	1 / 16	27.47
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	162 + 34	H + V	2Tx	H	124.0	278.0	1 / 12	27.03
		Mid	38499.96	CP-OFDM	QPSK	Folder Open	165	H	SISO	V	151.0	293.0	1 / 12	23.38
		Mid	38499.96	CP-OFDM	QPSK	Folder Open	37	V	SISO	H	155.0	75.0	1 / 16	25.35
		Mid	38499.96	CP-OFDM	QPSK	Folder Open	162 + 34	H + V	MMO	H	124.0	278.0	1 / 12	23.54
		Low	37025.04	DFT-s-OFDM	QPSK	Folder Open	28	V	SISO	H	200.0	293.0	1 / 12	25.79
		High	39975.00	DFT-s-OFDM	QPSK	Folder Open	37	V	SISO	H	197.0	288.0	1 / 12	26.44
		Mid	38499.96	DFT-s-OFDM	QPSK	Folder Closed	37	V	SISO	H	155.0	75.0	1 / 12	25.57
		Mid	38499.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	37	V	SISO	H	155.0	75.0	1 / 16	27.37
		Mid	38499.96	DFT-s-OFDM	16QAM	Folder Open	37	V	SISO	H	155.0	75.0	1 / 16	25.97
		Mid	38499.96	DFT-s-OFDM	64QAM	Folder Open	37	V	SISO	H	155.0	75.0	1 / 16	24.06
50+50	2	Mid	38499.96	DFT-s-OFDM	QPSK	Folder Open	37	V	SISO	H	201.0	273.0	32 / 0	23.28
		Mid	38499.96	DFT-s-OFDM	$\pi/2$ BPSK	Folder Open	37	V	SISO	H	201.0	273.0	32 / 0	23.38
		Mid	38499.96	DFT-s-OFDM	16QAM	Folder Open	37	V	SISO	H	201.0	273.0	32 / 0	22.10
		Mid	38499.96	DFT-s-OFDM	64QAM	Folder Open	37	V	SISO	H	201.0	273.0	32 / 0	19.55

Table 7-15. Ant 2 EIRP Data (Band n260 - 50MHz)

FCC ID: A3LSMF926U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 39 of 110

7.4 Radiated Spurious and Harmonic Emissions

§2.1051, §30.203

Test Overview

The spectrum is scanned from 30MHz to 100GHz for n261 and from 30MHz to 200GHz for n260. All out of band emissions are measured in a radiated test setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conductive power or total radiated power of any emissions outside a licensee's frequency block shall be -13dBm/1MHz.

Test Procedure Used

ANSI C63.26-2015 Section 5.7.4

KDB 842590 D01 v01r02 Section 4.4.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 100 GHz for n261 and 200GHz for n260. Several plots are used to show investigations in this entire span.
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. Number of sweep points $\geq 2 \times \text{Span/RBW}$
6. The trace was allowed to stabilize
7. RBW = 1MHz, VBW = 3MHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits.
- 3) Elements within the same antenna array are correlated to produce beamforming array gain. Antenna arrays cannot be correlated with another antenna array. During testing, only one antenna array was active.
- 4) The plots from 1-200GHz show corrected average EIRP levels. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. The field strength E is calculated $E (\text{dB}\mu\text{V/m}) = \text{Spectrum Analyzer Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + \text{Harmonic Mixer Conversion Loss (dB)} + 107$. All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement. For measurements > 40GHz, Harmonic Mixer Conversion Loss was also applied to the spectrum analyzer.
- 5) Emissions below 18GHz were measured at a 3 meter test distance, while emissions above 18GHz were measured at the appropriate far field distance. The far field of the mmWave signal is based on formula: $R > 2D^2/\text{wavelength}$, where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, D is the largest dimension of the measurement antenna.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 40 of 110

Frequency Range (GHz)	Wavelength(cm)	Far Field Distance (m)	Measurement Distance (m)
18-40	0.749	0.54	1.00
40-60	0.500	1.39	1.50
60-90	0.333	0.91	1.00
90-140	0.214	0.58	1.00
140-200	0.150	0.39	1.00

Table 7-16. Far-Field Distance & Measurement Distance per Frequency Range

- 6) All emissions from 30MHz - 40GHz were measured using a spectrum analyzer with an internal preamplifier. Emissions >40GHz were measured using a harmonic mixer with the spectrum analyzer.
- 7) All RSE's were measured with 1CC. It was determined that adding more CC's causes the overall amplitude of just 1CC to decrease, therefore, 1CC is the worst case for the purposes of spurious emissions measurements.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 9) All RSE's were investigated in EN-DC mode and with 802.11 chipset active. It was determined that there is no new emission introduced by EN-DC mode, or the 802.11 chipset. For EN-DC mode, n261 uses LTE B2, B5, B12, B13, B48 and B66, and n260 uses LTE B2, B5, B12, B13, B14, B30, B48 and B66.
- 10) The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter or as described in Table 7-16 to maintain far-field conditions.
- 11) The plots in this section were taken with the analyzer set to max hold. All final measurements shown in the tables that accompany the plots were taken with trace averaging performed over 100 sweeps while the analyzer was triggering on a specific emission of interest.
- 12) The folder open configuration was the worst case, so the full "open" test results are shown in this section.

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors.


RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Note: Harmonic Mixer Conversion Loss only applies to RSE measurements > 40 GHz where harmonic mixers were used.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 41 of 110

Band n261 – Ant 1

30MHz - 1GHz

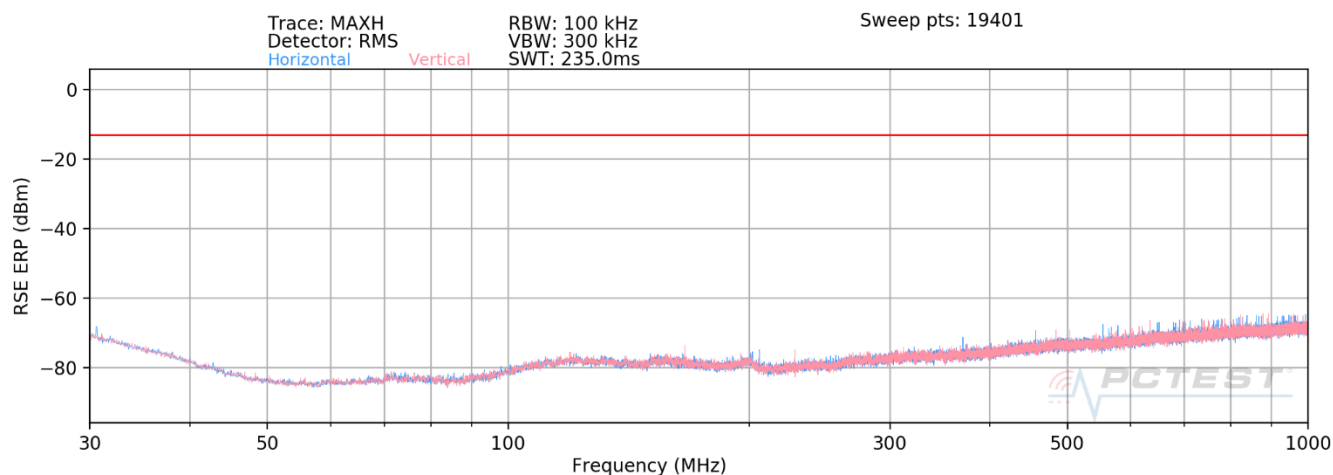

Plot 7-33. Ant 1 - n261 Radiated Spurious Plot – Anchor Band 2

Spurious Emissions ERP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE ERP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE ERP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 - 2.15 \text{ (dB)}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
60.01	Low	50	2Tx	QPSK	V	-	-	-90.42	-13.00	-77.42
87.22	Mid	50	2Tx	QPSK	V	-	-	-94.22	-13.00	-81.22
114.69	High	50	2Tx	QPSK	V	-	-	-94.69	-13.00	-81.69


Table 7-17. Ant 1 - Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE ERP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 42 of 110

1GHz - 18GHz

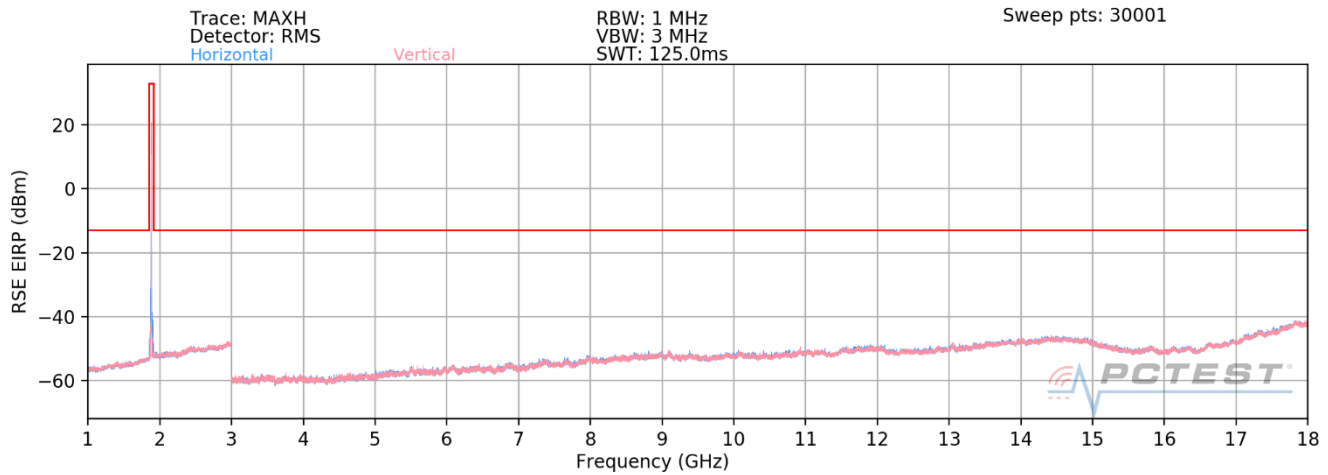

Plot 7-34. Ant 1 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8812.36	Low	50	2Tx	QPSK	H	-	-	-42.31	-13.00	-29.31
8572.22	Mid	50	2Tx	QPSK	H	-	-	-44.11	-13.00	-31.11
8970.64	High	50	2Tx	QPSK	H	-	-	-43.01	-13.00	-30.01


Table 7-18. Ant 1 - Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 43 of 110

18GHz - 27.5GHz

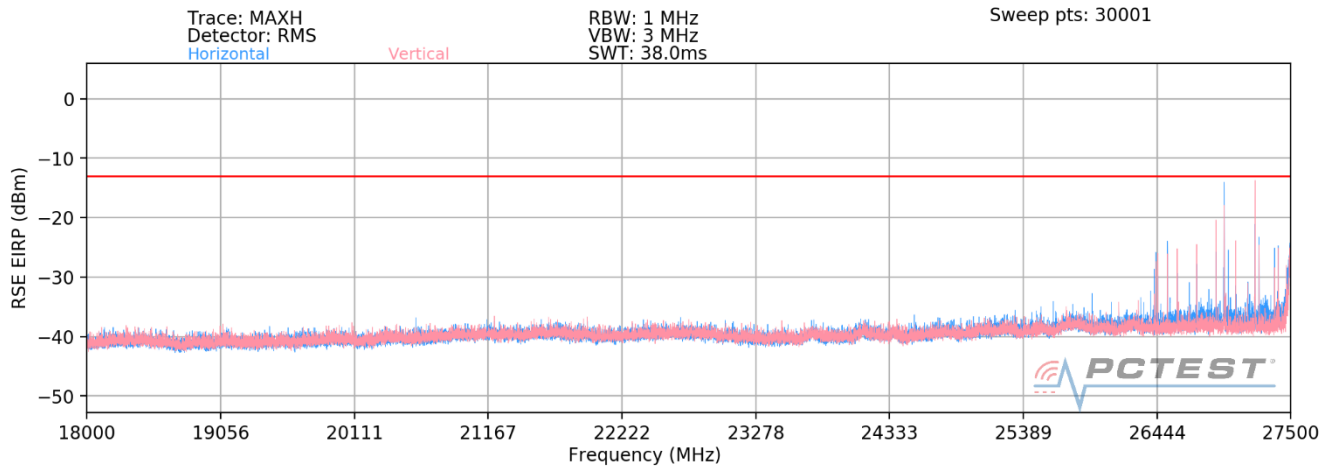

Plot 7-35. Ant 1 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
26974.80	Low	50	2Tx	QPSK	V	243	96	-18.31	-13.00	-5.31
27388.40	Mid	50	2Tx	QPSK	V	248	97	-20.26	-13.00	-7.26
27403.30	High	50	2Tx	QPSK	V	102	318	-22.10	-13.00	-9.10


Table 7-27. Ant 1 - Spurious Emissions Table (18GHz - 27.5GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 44 of 110

28.35GHz - 40GHz

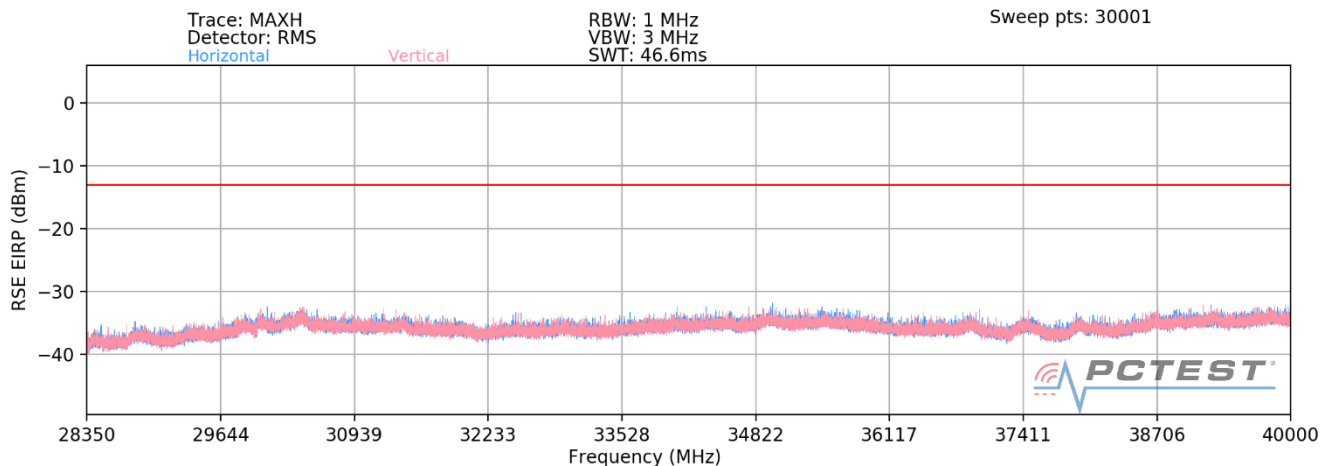

Plot 7-36. Ant 1 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28614.91	Low	50	2Tx	QPSK	V	126	274	-18.77	-13.00	-5.77
28539.20	Mid	50	2Tx	QPSK	V	246	94	-24.29	-13.00	-11.29
28632.20	High	50	2Tx	QPSK	V	106	308	-21.58	-13.00	-8.58


Table 7-28. Ant 1 - Spurious Emissions Table (28.35GHz - 40GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1 meter

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 45 of 110

40GHz - 60GHz

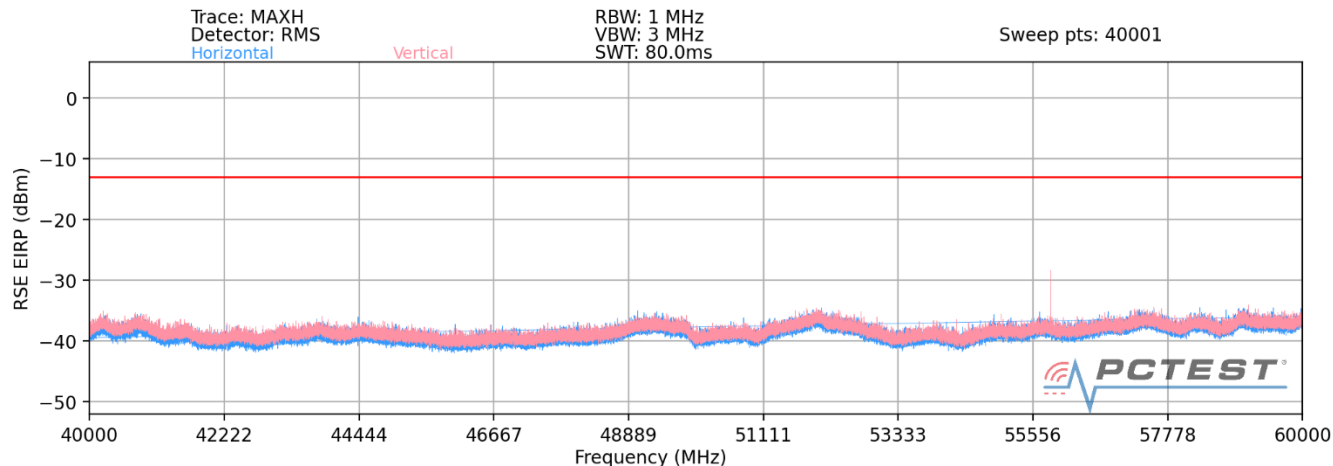

Plot 7-37. Ant 1 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55121.04	Low	50	2Tx	QPSK	V	111	299	-25.42	-13.00	-12.42
55896.72	Mid	50	2Tx	QPSK	V	104	334	-24.50	-13.00	-11.50
56650.77	High	50	2Tx	QPSK	V	-	-	-28.62	-13.00	-15.62


Table 7-29. Ant 1 - Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 46 of 110

60GHz - 90GHz

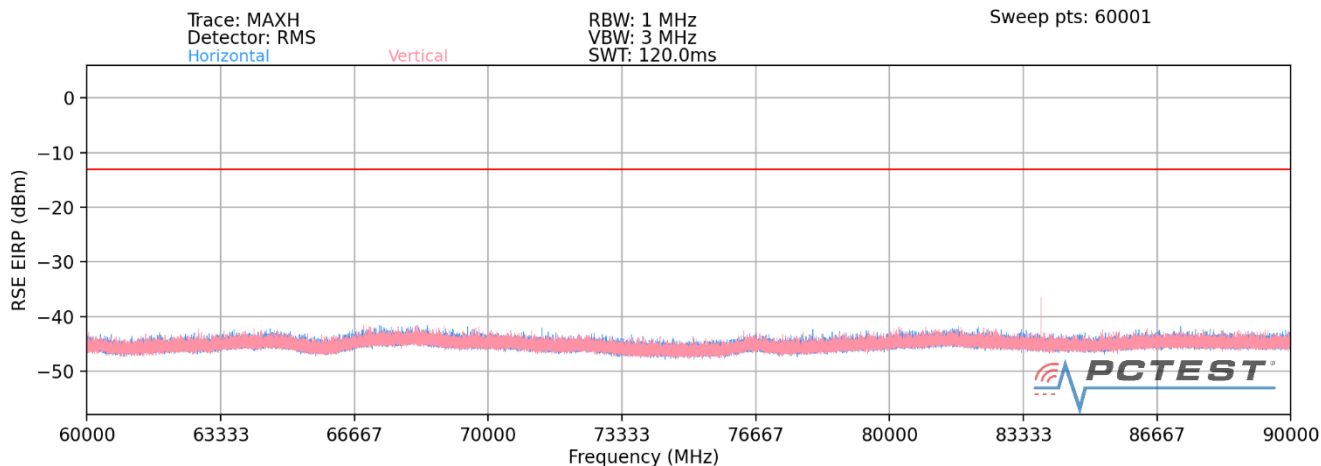

Plot 7-38. Ant 1 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82578.12	Low	50	2Tx	QPSK	V	337	324	-24.85	-13.00	-11.85
83776.46	Mid	50	2Tx	QPSK	V	334	319	-22.01	-13.00	-9.01
84977.91	High	50	2Tx	QPSK	V	335	326	-25.11	-13.00	-12.11


Table 7-30. Ant 1 - Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 47 of 110

90GHz - 100GHz

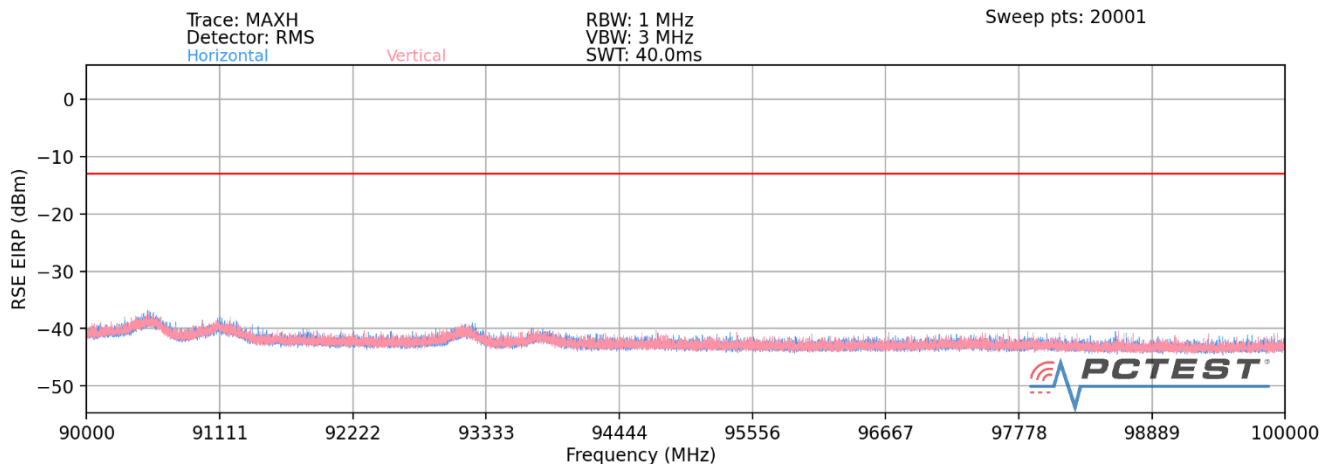

Plot 7-39. Ant 1 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
110103.60	Low	50	2Tx	QPSK	V	-	-	-32.49	-13.00	-19.49
111701.94	Mid	50	2Tx	QPSK	V	-	-	-33.21	-13.00	-20.21
113303.88	High	50	2Tx	QPSK	V	-	-	-34.61	-13.00	-21.61

Table 7-31. Ant 1 - Spurious Emissions Table (90GHz - 100GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 48 of 110

Band n261 – Ant 2

30MHz - 1GHz

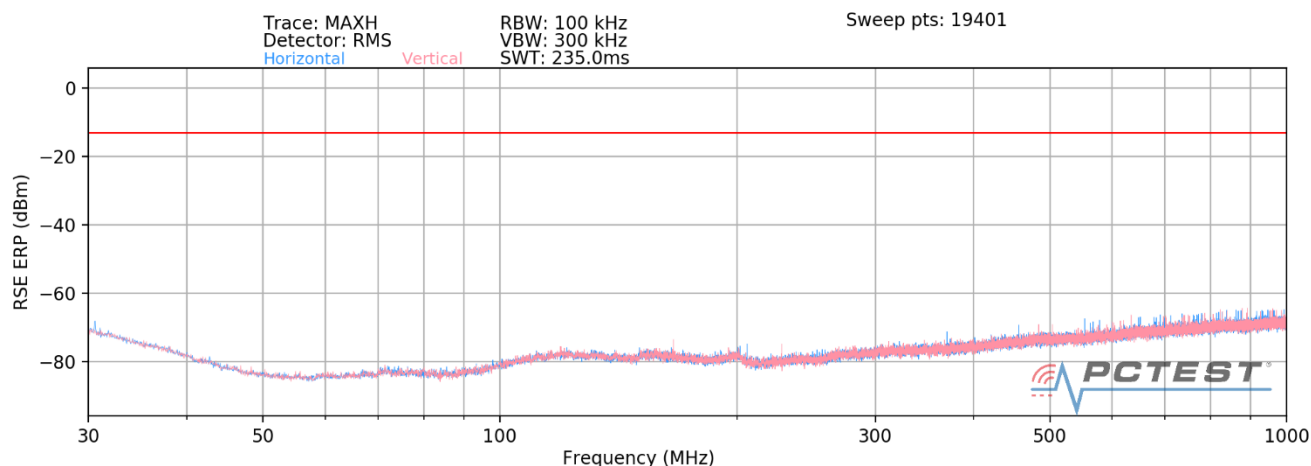

Plot 7-40. Ant 2 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions ERP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE ERP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE ERP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 - 2.15 \text{ (dB)}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
56.11	Low	50	2Tx	QPSK	H	241	142	-90.01	-13.00	-77.01
89.21	Mid	50	2Tx	QPSK	H	263	144	-94.21	-13.00	-81.21
113.00	High	50	2Tx	QPSK	H	222	186	-93.33	-13.00	-80.33


Table 7-32. Ant 2 - Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE ERP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 49 of 110

1GHz - 18GHz

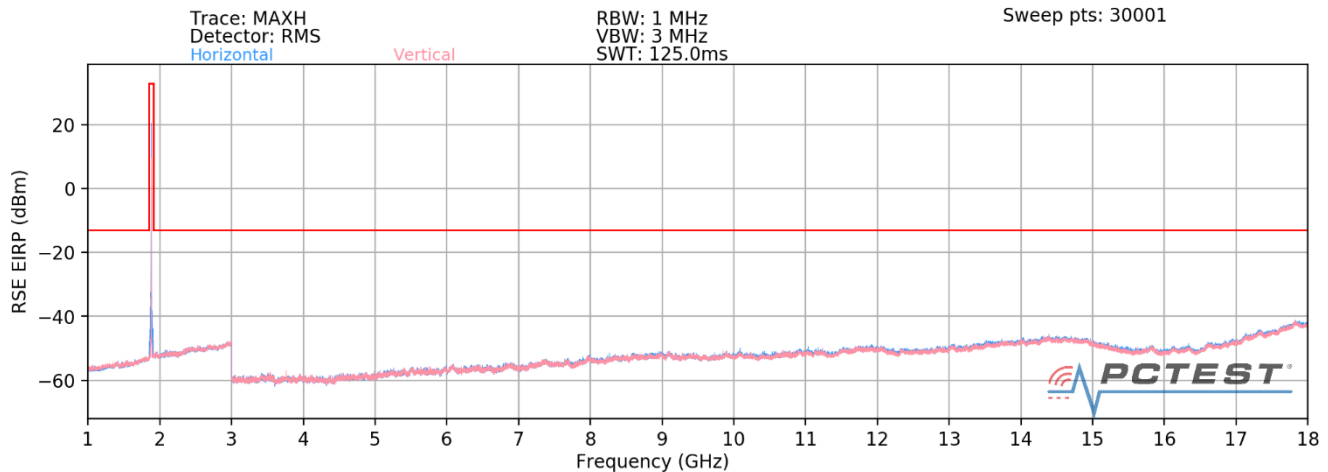

Plot 7-41. Ant 2 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions ERP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE ERP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE ERP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 - 2.15 \text{ (dB)}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8813.12	Low	50	2Tx	QPSK	V	341	123	-40.21	-13.00	-27.21
8573.41	Mid	50	2Tx	QPSK	V	355	144	-43.01	-13.00	-30.01
8971.60	High	50	2Tx	QPSK	V	9	1	-39.11	-13.00	-26.11


Table 7-33. Ant 2 - Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE ERP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 50 of 110

18GHz - 27.5GHz

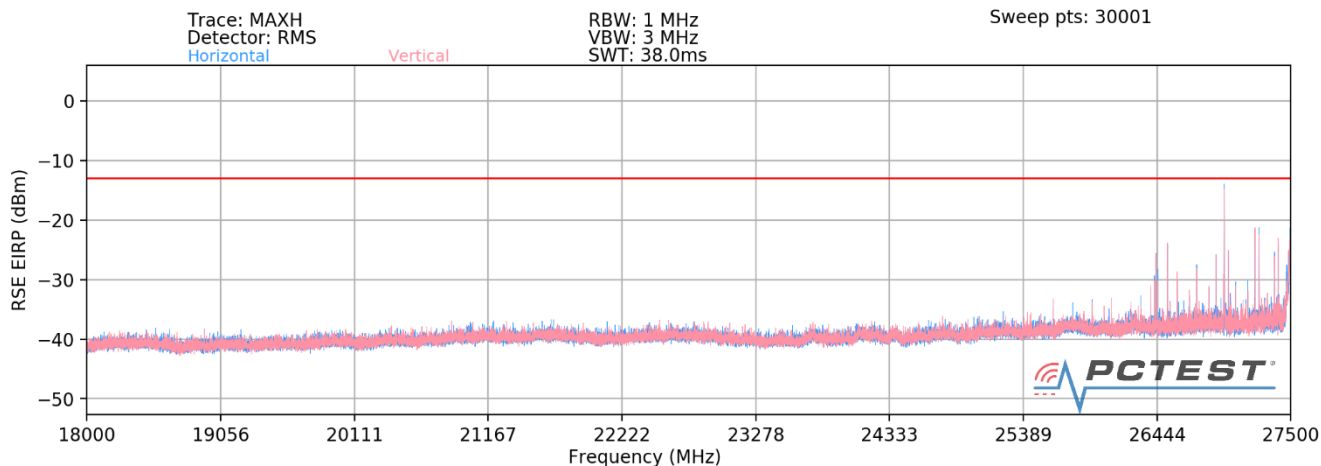

Plot 7-42. Ant 2 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
26974.80	Low	50	2Tx	QPSK	V	159	1	-23.24	-13.00	-10.24
27388.40	Mid	50	2Tx	QPSK	V	160	351	-23.14	-13.00	-10.14
27403.30	High	50	2Tx	QPSK	V	161	349	-22.89	-13.00	-9.89


Table 7-34. Ant 2 - Spurious Emissions Table (18GHz - 27.5GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 51 of 110

28.35GHz - 40GHz

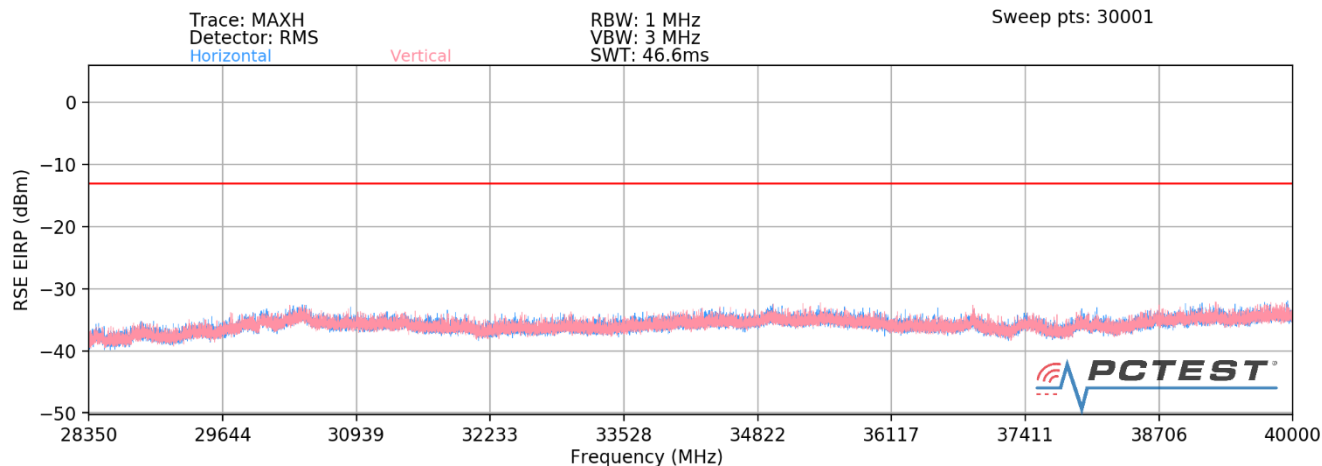

Plot 7-43. Ant 2 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28614.91	Low	50	2Tx	QPSK	V	147	357	-25.68	-13.00	-12.68
28539.20	Mid	50	2Tx	QPSK	V	149	348	-26.01	-13.00	-13.01
28632.20	High	50	2Tx	QPSK	V	151	356	-26.28	-13.00	-13.28


Table 7-35. Ant 2 - Spurious Emissions Table (28.35GHz - 40GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 52 of 110

40GHz - 60GHz

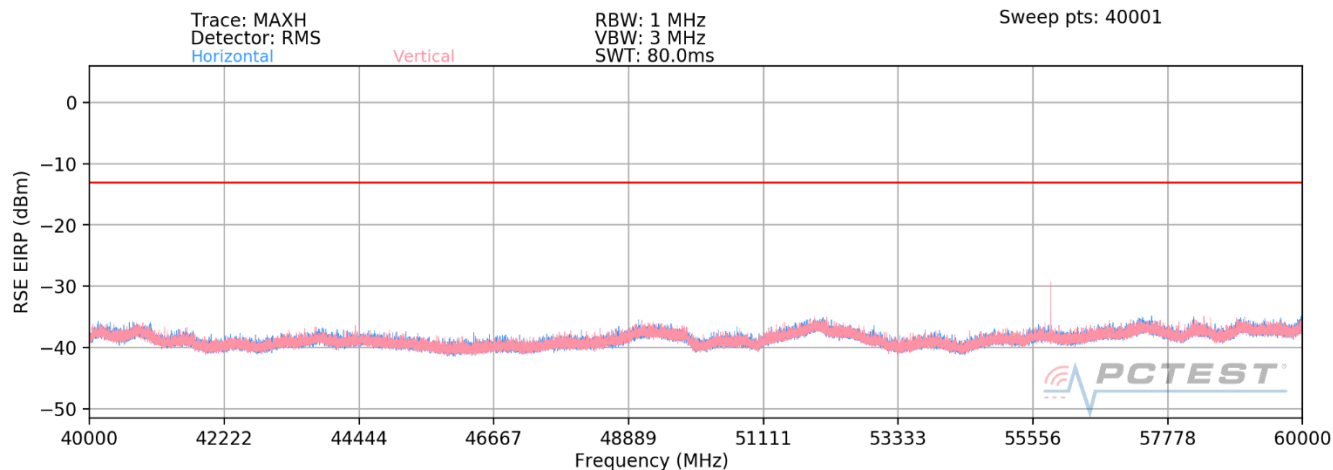

Plot 7-44. Ant 2 - n261 Radiated Spurious Plot- Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55097.45	Low	50	2Tx	QPSK	V	243	40	-25.36	-13.00	-12.36
55897.32	Mid	50	2Tx	QPSK	V	241	48	-23.38	-13.00	-10.38
56697.39	High	50	2Tx	QPSK	V	258	15	-24.11	-13.00	-11.11


Table 7-36. Ant 2 - Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 53 of 110

60GHz - 90GHz

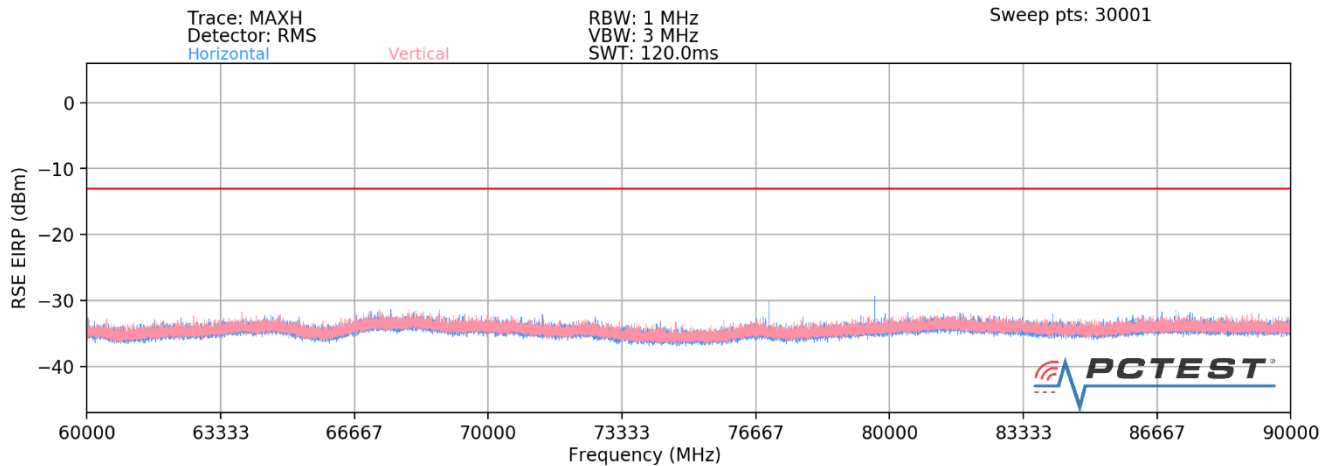

Plot 7-45. Ant 2 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82577.70	Low	50	2Tx	QPSK	V	274	316	-31.64	-13.00	-18.64
83776.45	Mid	50	2Tx	QPSK	V	289	337	-30.00	-13.00	-17.00
84977.91	High	50	2Tx	QPSK	V	299	326	-30.56	-13.00	-17.56


Table 7-37. Ant 2 - Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 54 of 110

90GHz - 100GHz

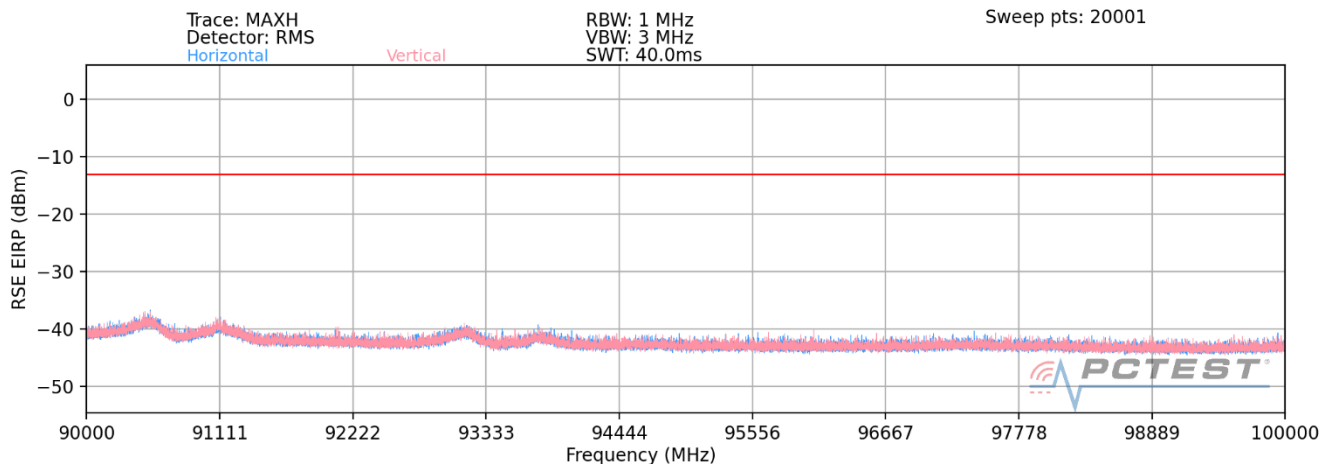

Plot 7-46. Ant 2 - n261 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
110103.60	Low	50	2Tx	QPSK	V	-	-	-33.14	-13.00	-20.14
111701.94	Mid	50	2Tx	QPSK	V	-	-	-33.52	-13.00	-20.52
113303.88	High	50	2Tx	QPSK	V	-	-	-35.01	-13.00	-22.01

Table 7-38. Ant 2 - Spurious Emissions Table (90GHz - 100GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 55 of 110

Band n260- Ant 1

30MHz - 1GHz

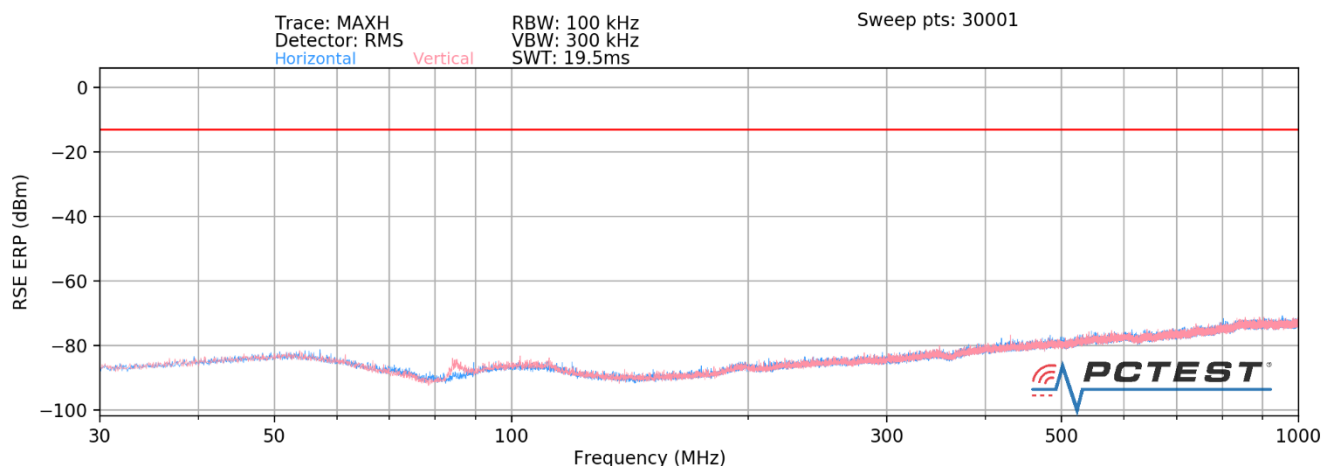

Plot 7-47. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
79.51	Low	50	2Tx	QPSK	V	301	311	-64.01	-13.00	-51.01
79.67	Mid	50	2Tx	QPSK	V	299	313	-63.81	-13.00	-50.81
80.12	High	50	2Tx	QPSK	V	333	291	-63.44	-13.00	-50.44


Table 7-39. Ant 1 - Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 56 of 110

1GHz - 18GHz

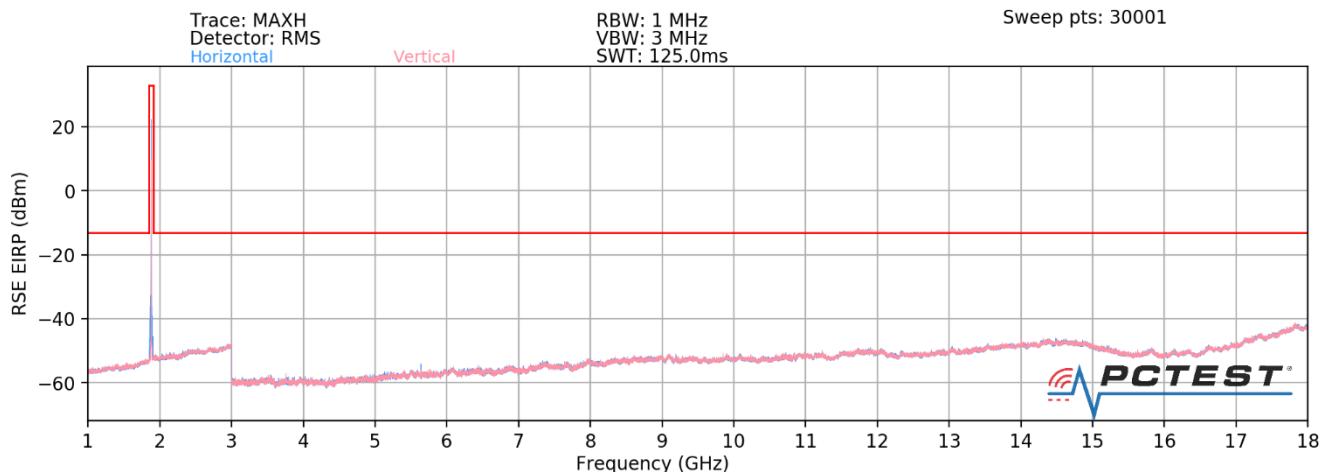

Plot 7-48. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
9411.41	Low	50	2Tx	QPSK	V	-	-	-43.01	-13.00	-30.01
8824.00	Mid	50	2Tx	QPSK	V	-	-	-43.22	-13.00	-30.22
9000.00	High	50	2Tx	QPSK	V	-	-	-43.69	-13.00	-30.69


Table 7-40. Ant 1 - Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 57 of 110

18GHz – 37GHz

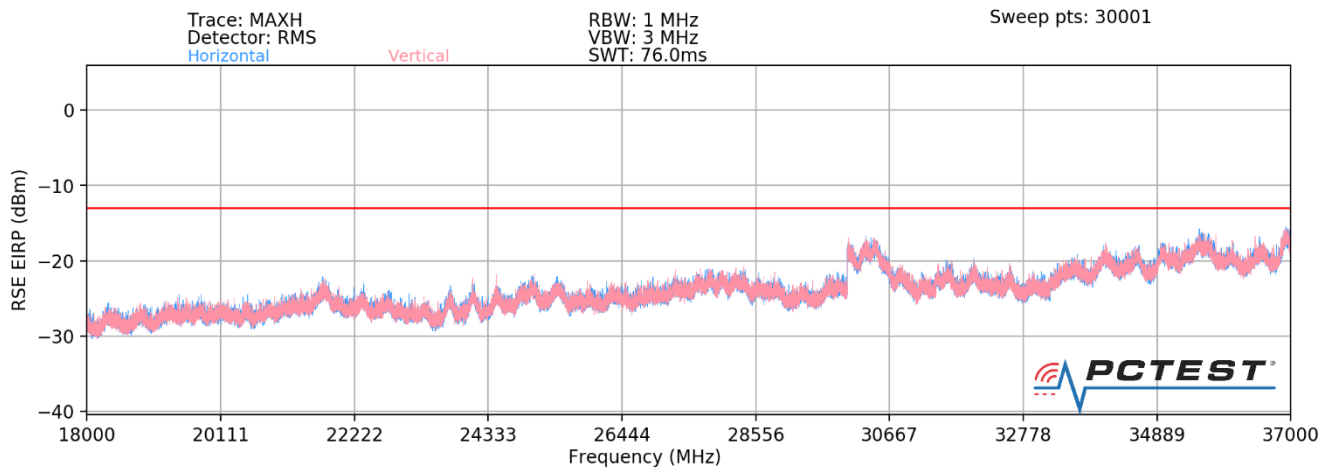

Plot 7-49. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36475.00	Low	50	2Tx	QPSK	V	159	21	-32.03	-13.00	-19.03
36504.00	Mid	50	2Tx	QPSK	V	239	284	-39.53	-13.00	-26.53
30821.68	High	50	2Tx	QPSK	V	271	109	-33.11	-13.00	-20.11


Table 7-41. Ant 1 - Spurious Emissions Table (18GHz – 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 58 of 110

40GHz - 60GHz

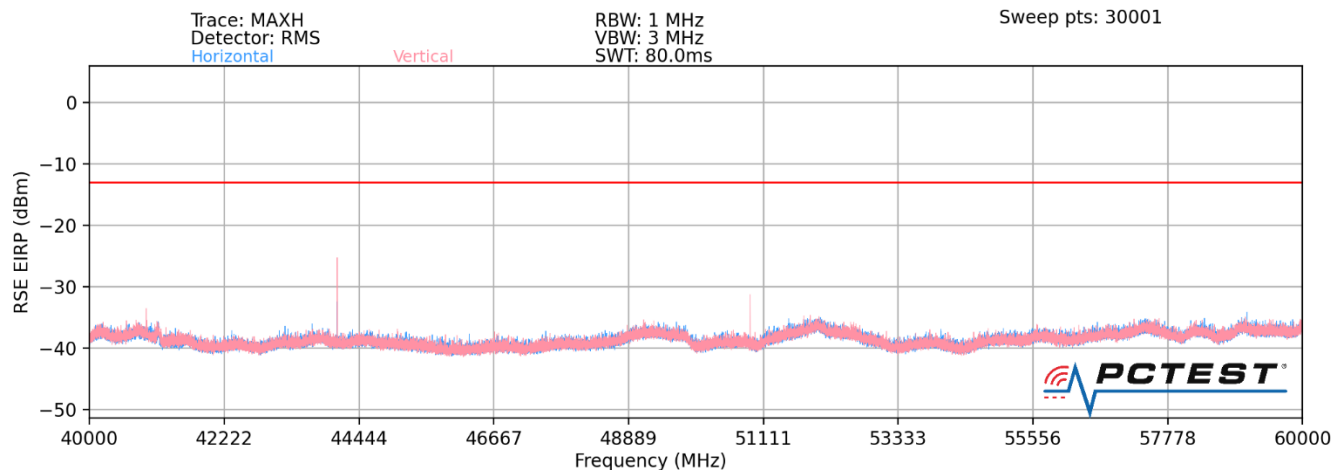

Plot 7-50. Ant 1 - n260 Radiated Spurious Plot- Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42930.90	Low	50	2Tx	QPSK	V	344	338	-36.44	-13.00	-23.44
44082.85	MID	50	2Tx	QPSK	V	345	334	-36.29	-13.00	-23.29
46233.22	High	50	2Tx	QPSK	V	345	306	-38.93	-13.00	-25.93


Table 7-42. Ant 1 - Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 59 of 110

60GHz - 90GHz

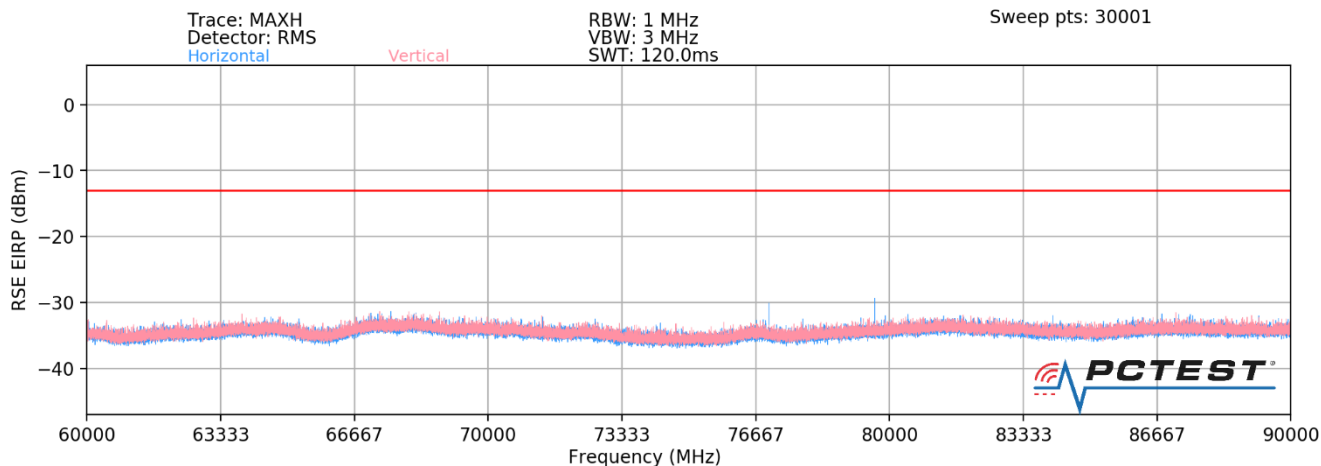

Plot 7-51. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74051.28	Low	50	2Tx	QPSK	H	95	111	-46.64	-13.00	-33.64
76684.94	Low	50	2Tx	QPSK	H	148	94	-40.33	-13.00	-27.33
77001.87	Mid	50	2Tx	QPSK	H	197	272	-39.66	-13.00	-26.66
79634.85	Mid	50	2Tx	QPSK	H	156	101	-39.58	-13.00	-26.58
79951.50	High	50	2Tx	QPSK	H	129	126	-45.10	-13.00	-32.10
81761.77	High	50	2Tx	QPSK	H	370	57	-46.80	-13.00	-33.80


Table 7-43. Ant 1 - Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 60 of 110

90GHz - 140GHz

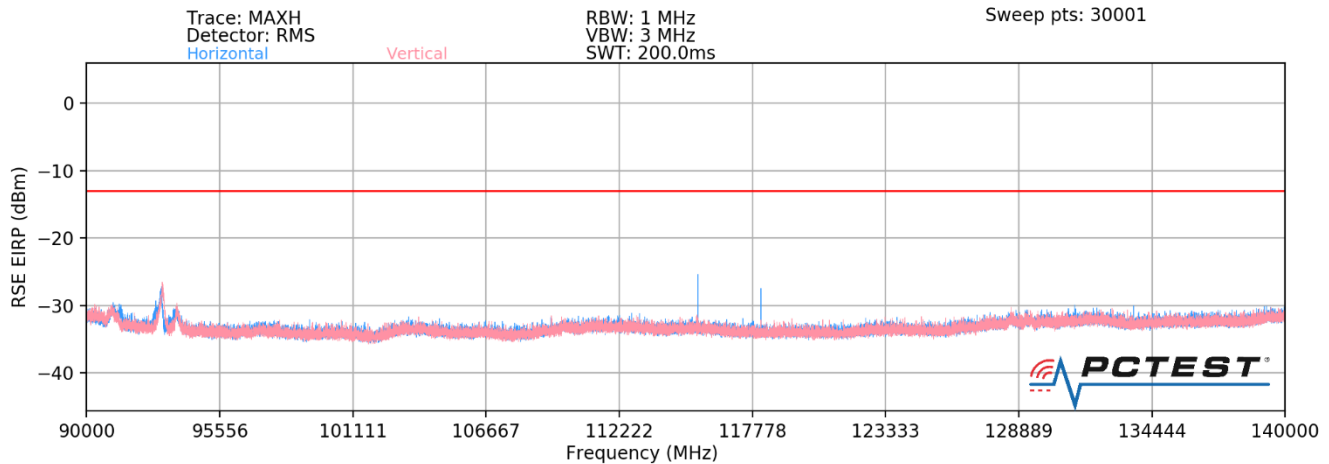

Plot 7-52. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.92	Low	50	2Tx	QPSK	H	215	300	-34.65	-13.00	-21.65
113710.04	Low	50	2Tx	QPSK	H	36	299	-37.07	-13.00	-24.07
115502.81	Mid	50	2Tx	QPSK	H	305	245	-35.88	-13.00	-22.88
118134.90	Mid	50	2Tx	QPSK	H	294	93	-38.79	-13.00	-25.79
119927.25	High	50	2Tx	QPSK	H	195	322	-45.20	-13.00	-32.20
122559.75	High	50	2Tx	QPSK	H	104	229	-38.32	-13.00	-25.32


Table 7-44. Ant 1 - Spurious Emissions Table (90GHz - 140GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 61 of 110

140GHz - 170GHz

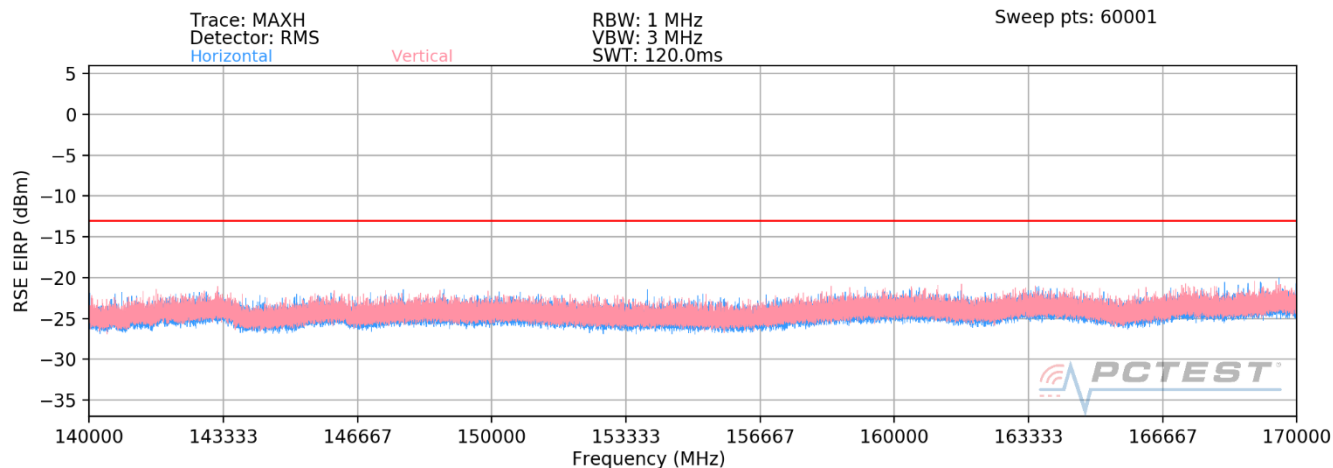

Plot 7-53. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
148102.56	Low	50	2Tx	QPSK	H	-	-	-38.41	-13.00	-25.41
154003.74	Mid	50	2Tx	QPSK	H	-	-	-39.04	-13.00	-26.04
159903.00	High	50	2Tx	QPSK	H	-	-	-38.10	-13.00	-25.10


Table 7-45. Ant 1 - Spurious Emissions Table (140GHz - 170GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 62 of 110

170GHz - 200GHz

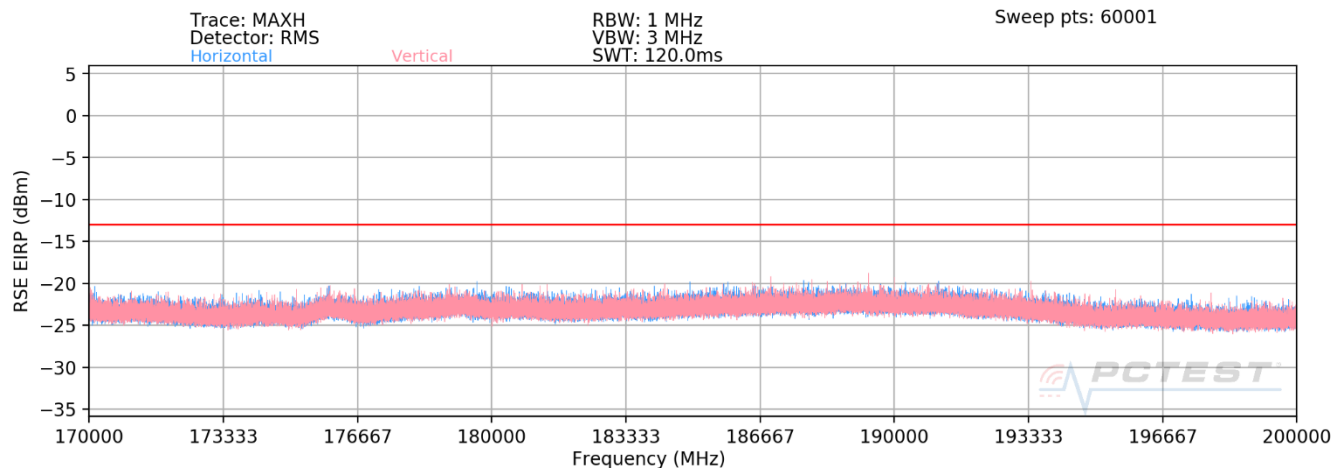

Plot 7-54. Ant 1 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
185128.20	Low	50	2Tx	QPSK	H	-	-	-37.40	-13.00	-24.40
192504.68	Mid	50	2Tx	QPSK	H	-	-	-37.31	-13.00	-24.31
199878.75	High	50	2Tx	QPSK	H	-	-	-38.69	-13.00	-25.69

Table 7-46. Ant 1 - Spurious Emissions Table (170GHz - 200GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 63 of 110

Band n260- Ant 2

30MHz - 1GHz

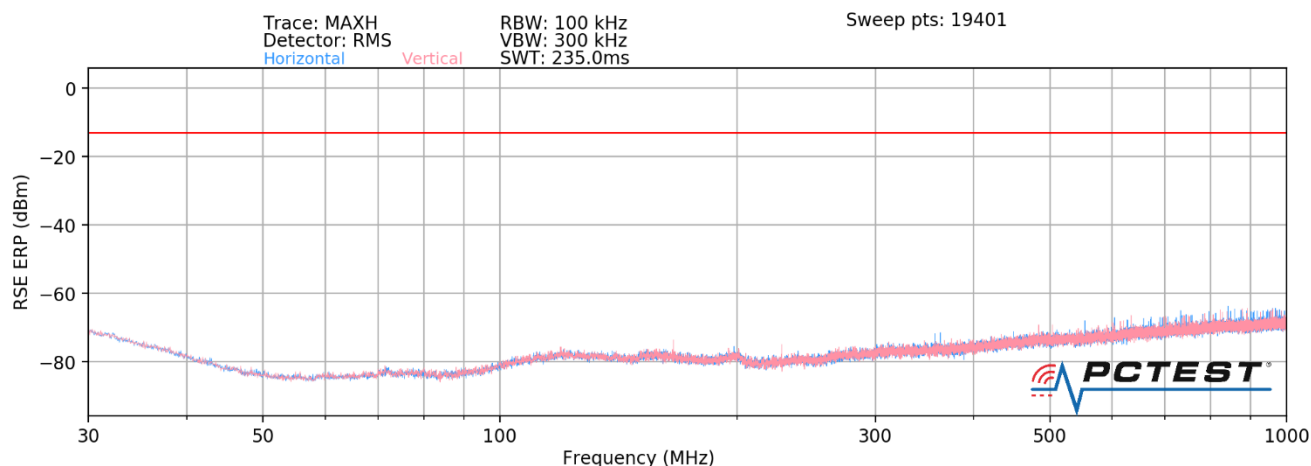

Plot 7-55. Ant 2 - n260 Radiated Spurious Plot- Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
62.11	Low	50	2Tx	QPSK	V	-	-	-92.11	-13.00	-79.11
90.41	Mid	50	2Tx	QPSK	V	-	-	-94.56	-13.00	-81.56
116.20	High	50	2Tx	QPSK	V	-	-	-94.33	-13.00	-81.33


Table 7-47. Ant 2 - Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 64 of 110

1GHz - 18GHz

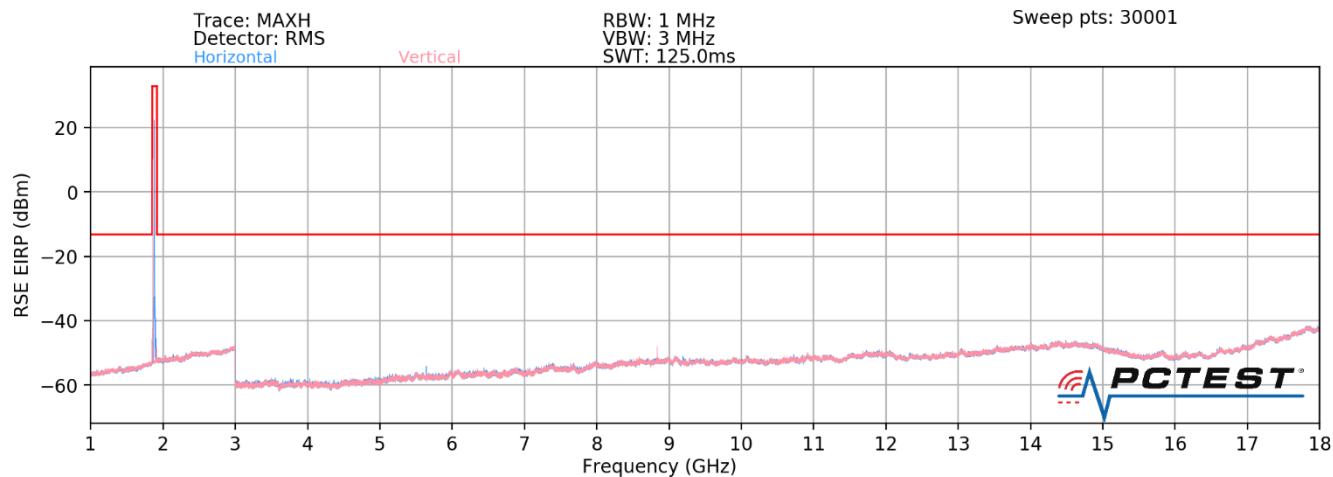

Plot 7-56. Ant 2 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8814.00	Low	50	2Tx	QPSK	H	55	124	-42.01	-13.00	-29.01
8602.10	Mid	50	2Tx	QPSK	H	200	136	-42.33	-13.00	-29.33
8977.00	High	50	2Tx	QPSK	H	56	144	-41.69	-13.00	-28.69


Table 7-48. Ant 2 - Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset			Page 65 of 110

18GHz – 37GHz

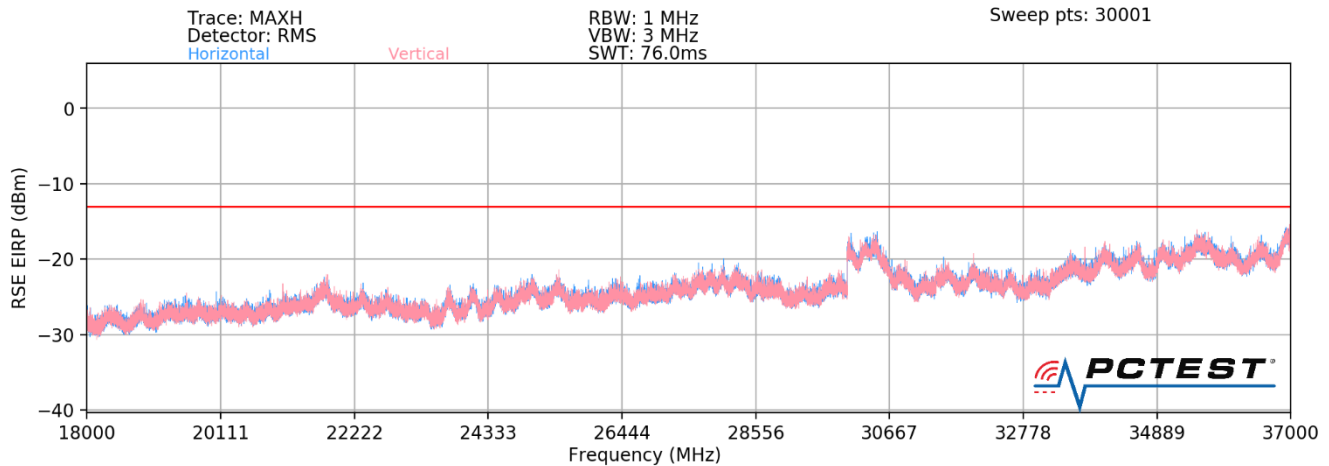

Plot 7-57. Ant 2 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36444.00	Low	50	2Tx	QPSK	H	36	344	-27.33	-13.00	-14.33
37975.50	Mid	50	2Tx	QPSK	H	37	350	-28.23	-13.00	-15.23
30821.98	High	50	2Tx	QPSK	H	21	331	-24.69	-13.00	-11.69


Table 7-49. Ant 2 - Spurious Emissions Table (18GHz – 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 66 of 110

40GHz - 60GHz

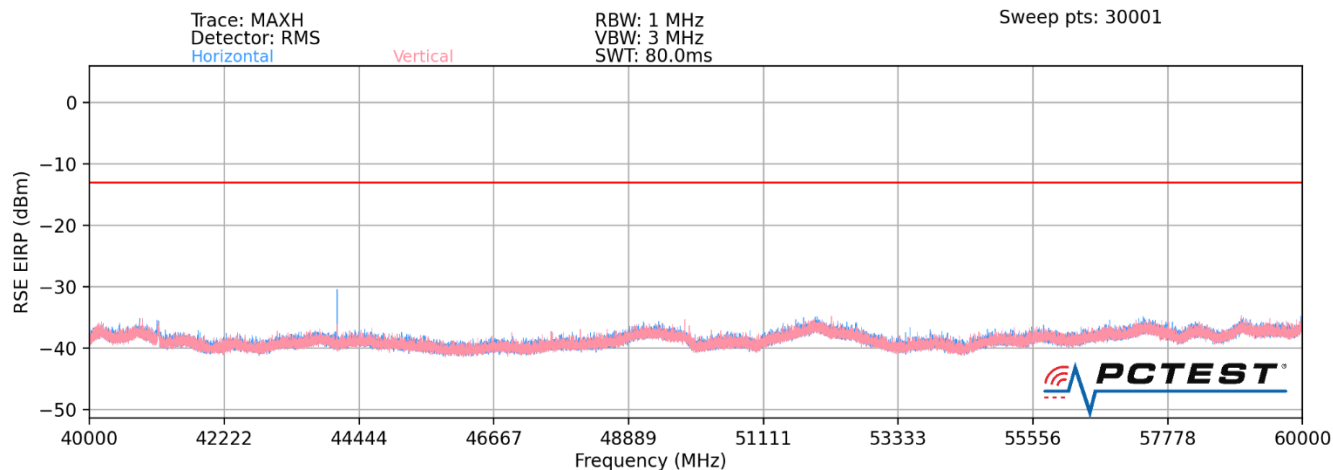

Plot 7-58. Ant 2 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42930.90	Low	50	2Tx	QPSK	V	63	10	-28.37	-13.00	-15.37
44082.85	MID	50	2Tx	QPSK	V	63	2	-28.43	-13.00	-15.43
46233.28	High	50	2Tx	QPSK	V	74	2	-32.68	-13.00	-19.68


Table 7-50. Ant 2 - Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 67 of 110

60GHz - 90GHz

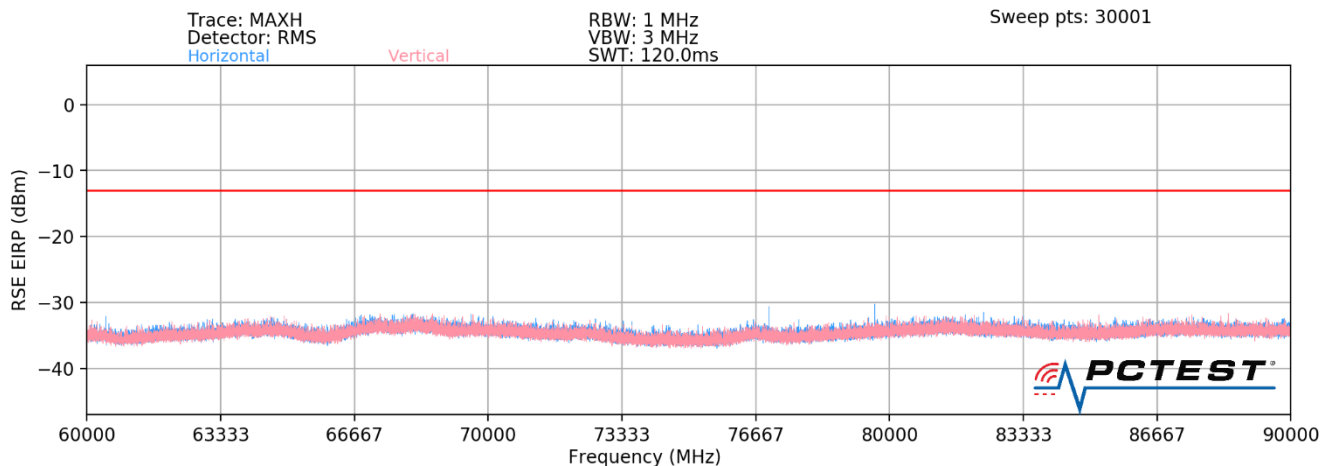

Plot 7-34. Ant 2 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74051.28	Low	50	2Tx	QPSK	V	41	24	-26.42	-13.00	-13.42
77000.30	Mid	50	2Tx	QPSK	V	45	8	-29.14	-13.00	-16.14
79950.50	High	50	2Tx	QPSK	V	49	27	-25.40	-13.00	-12.40


Table 7-51. Ant 2 - Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 68 of 110

90GHz - 140GHz

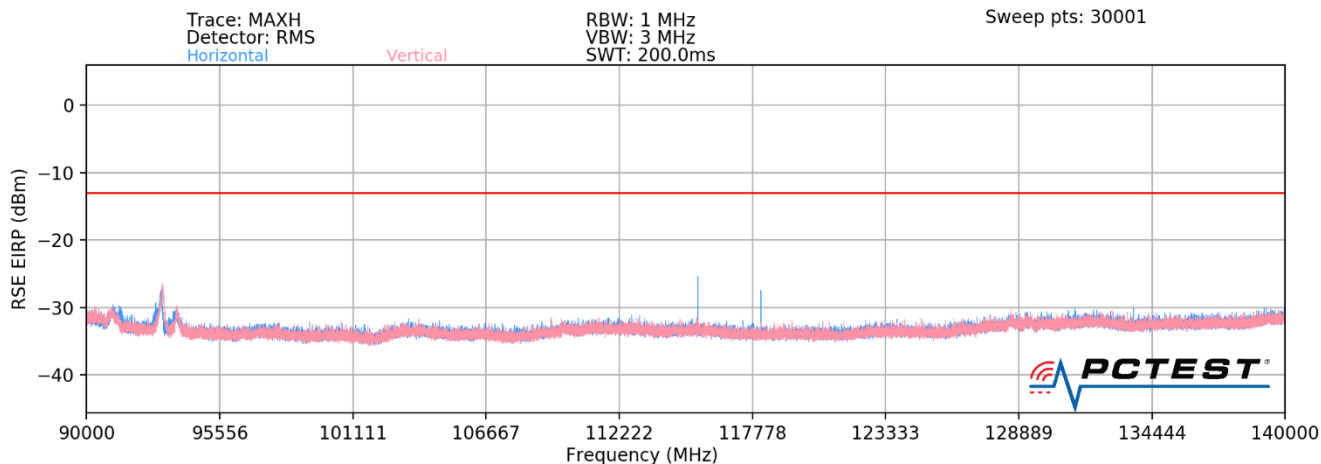

Plot 7-60. Ant 2 - n260 Radiated Spurious Plot- Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.92	Low	50	V	QPSK	H	313	202	-41.52	-13.00	-28.52
111115.13	Low	50	V	QPSK	H	-	-	-45.01	-13.00	-32.01
115502.81	Mid	50	V	QPSK	H	312	207	-38.61	-13.00	-25.61
118136.56	Mid	50	V	QPSK	H	213	370	-40.94	-13.00	-27.94
119927.25	High	50	V	QPSK	H	313	213	-40.45	-13.00	-27.45
128371.22	High	50	V	QPSK	H	-	-	-44.35	-13.00	-31.35


Table 7-52. Ant2 - Spurious Emissions Table (90GHz - 140GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 69 of 110

140GHz - 170GHz

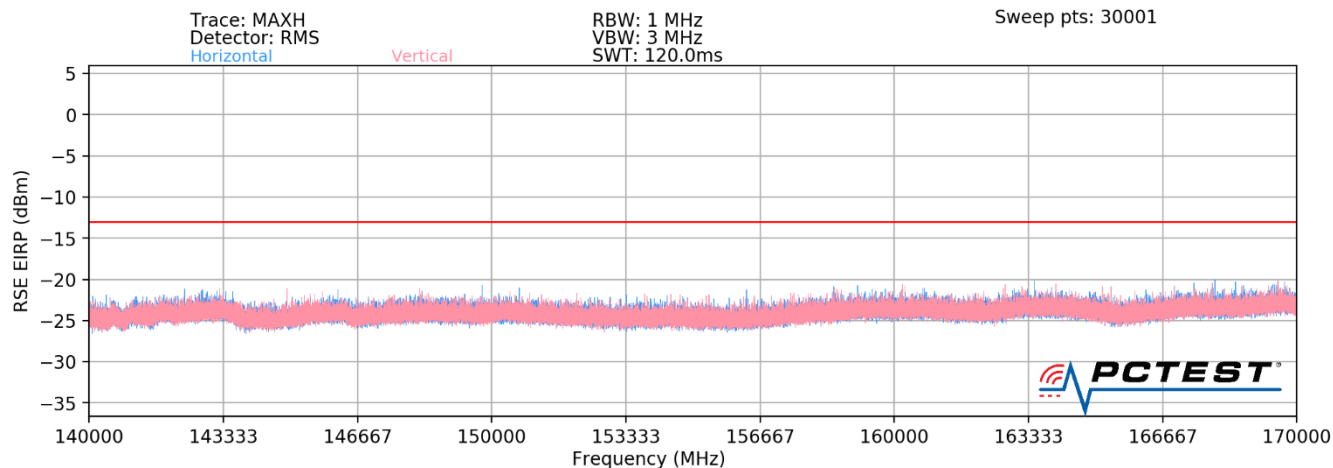

Plot 7-61. Ant 2 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
148102.56	Low	50	2Tx	QPSK	H	-	-	-38.53	-13.00	-25.53
154003.74	Mid	50	2Tx	QPSK	H	-	-	-39.13	-13.00	-26.13
159903.00	High	50	2Tx	QPSK	H	-	-	-38.05	-13.00	-25.05


Table 7-53. Ant 2 - Spurious Emissions Table (140GHz - 170GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 70 of 110

170GHz - 200GHz

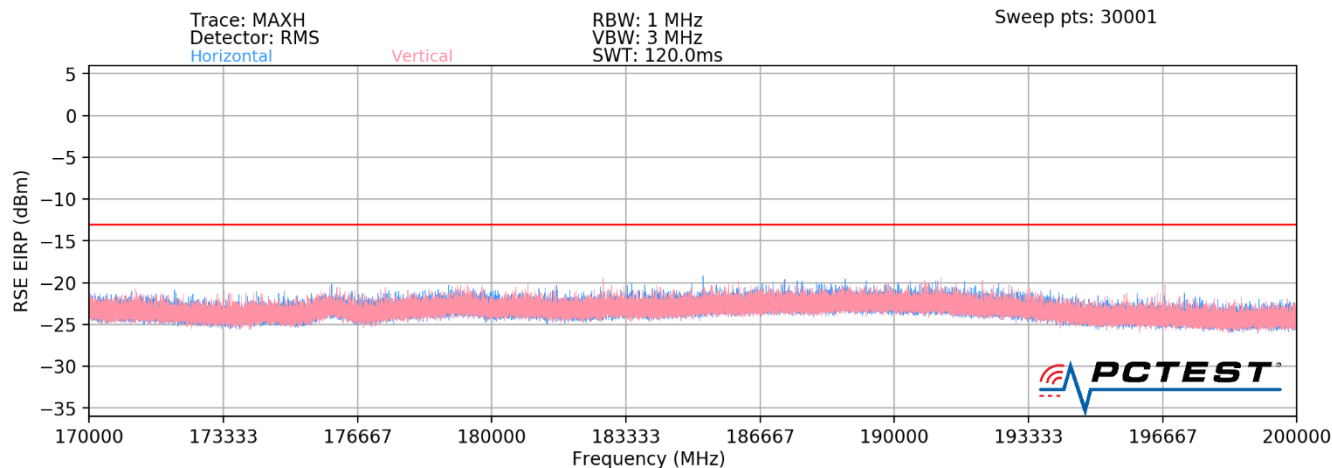

Plot 7-62. Ant 2 - n260 Radiated Spurious Plot– Anchor Band 2

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
185128.20	Low	50	2Tx	QPSK	H	-	-	-38.01	-13.00	-25.01
192504.68	Mid	50	2Tx	QPSK	H	-	-	-37.28	-13.00	-24.28
199878.75	High	50	2Tx	QPSK	H	-	-	-38.91	-13.00	-25.91

Table 7-54. Ant 2 - Spurious Emissions Table (170GHz - 200GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 71 of 110

7.5 Band Edge Emissions

§2.1051, §30.203

Test Overview

All out of band emissions are measured in a radiated setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

Test Procedure Used

ANSI C63.26-2015 Section 5 and ANSI C63.26-2015 Section 6.4
 KDB 842590 D01 v01r02 Section 4.4.2.4

Test Settings

1. Start and stop frequency were set such that both upper and lower band edges are measured.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 1MHz
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) Band Edge emissions were measured at a 1 meter distance.
- 3) The spectrum analyzer for each measurement shows an offset value that was determined using the measurement antenna factor, cable loss, far field measurement distance. A sample calculation is shown on the following page.
- 4) This device supports transmission of H-polarized and V-polarized beams from the antenna array in both CP-OFDM and DFT-s-OFDM transmission schemes. SISO and MIMO operation is also supported for some configurations. As part of the testing, all modes were fully investigated and only the worst case has been included in this report.
- 5) All combinations of 1CC and 2CC were fully investigated, and only the worst case has been included in this report.
- 6) All 2CC cases were investigated with PCC prioritization feature, which was the higher PCC at the band edge for the worst case.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset	Page 72 of 110	

Sample Analyzer Offset Calculation (at 27.5GHz)

Measurement Antenna Factor = 40.70dB/m

Cable Loss = 8.82dB

Analyzer Offset (dB) = AF (dB/m) + CL (dB) + 107 + 20log₁₀(D) – 104.8dB, where D = 1m

$$= 40.70\text{dB/m} + 8.82\text{dB} + 107 + 20\log_{10}(1\text{m}) - 104.8\text{dB}$$


$$= 51.72\text{dB}$$

Note:


While it is allowed to use the antenna gain subtraction method in the band edge as it is defined in Part 30, the device meets the requirements via early exit condition as specified in KDB publication 842590 D01.

FCC ID: A3LSMF926U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 73 of 110

Band n261 – Worst-Case

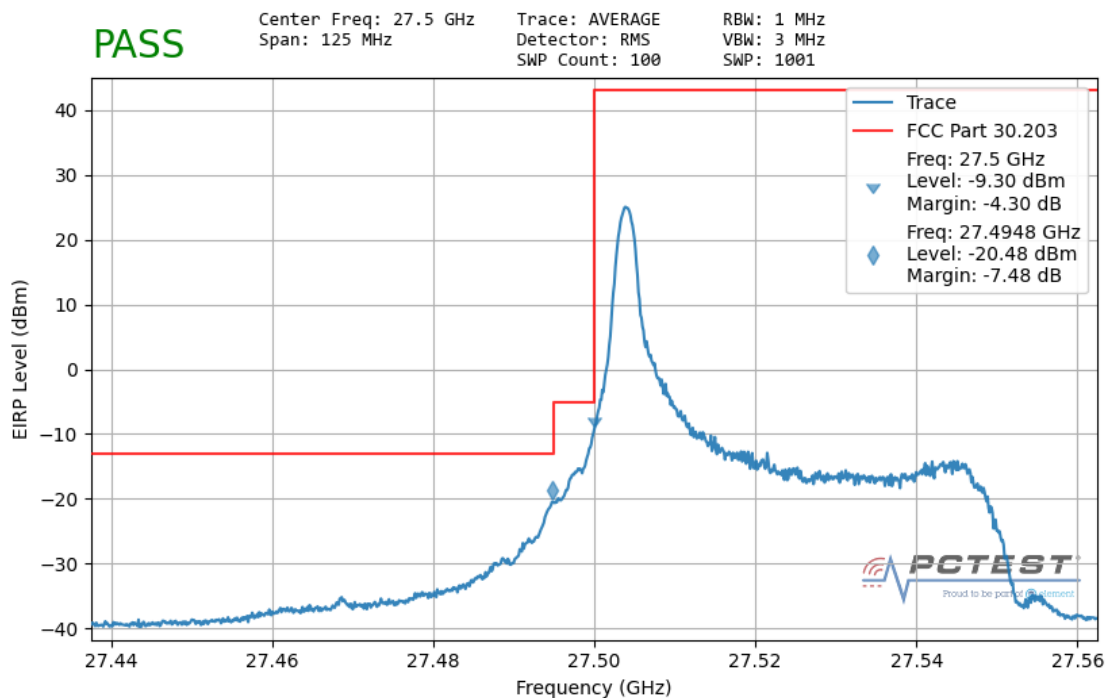

Plot 7-63. Ant 1 Lower Band Edge (50MHz-1CC – pi/2-BPSK 1 RB)

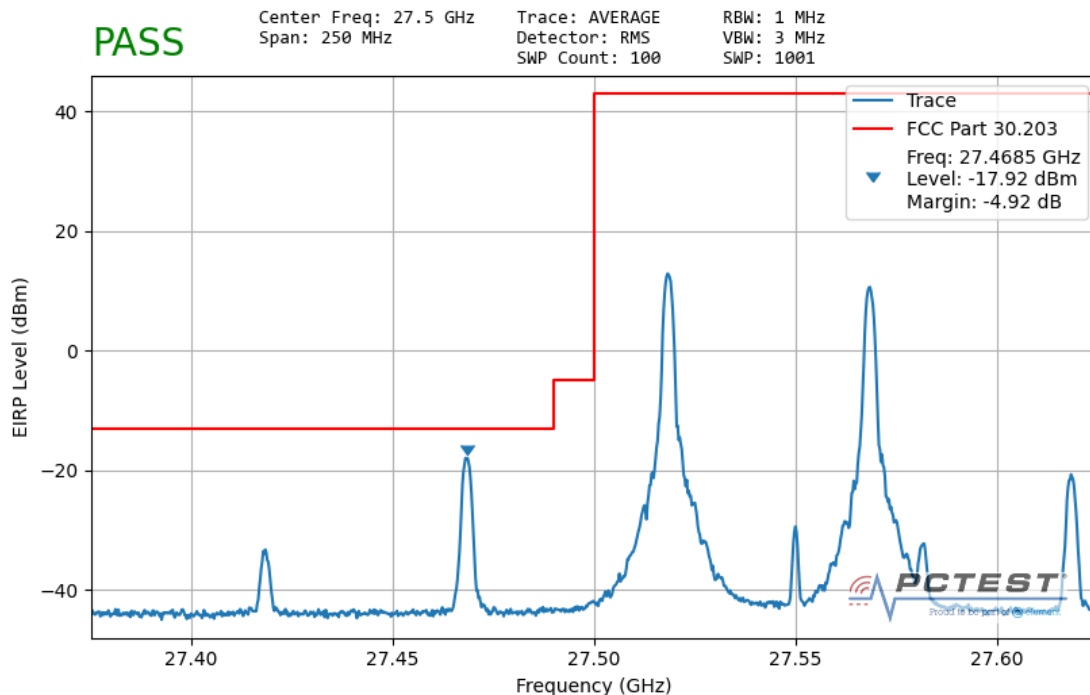

Plot 7-64. Ant 1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF926U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2104020031-08.A3L	Test Dates: 03/26 – 06/03/2021	EUT Type: Portable Handset		Page 74 of 110